

# DFS TEST REPORT

**Report No.:** TS13040071-EME

**Model No.:** M310

**Issued Date:** Jun. 06, 2013

**Applicant:** Huawei Technologies Co., Ltd.  
Administration Building, Headquarters of Huawei Technologies  
Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Test Method/ Standard:** FCC Part 15 Subpart E Section §15.407 (DFS test only)

**Test By:** Intertek Testing Services Taiwan Ltd.  
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,  
Shiang-Shan District, Hsinchu City, Taiwan

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

**The test report was prepared by:** Sign on File  
Jill Chen / Assistant

**These measurements were taken by:** Sign on File  
Hugo Yeh / Engineer

**The test report was reviewed by:**

**Name** Jimmy Yang  
**Title** Engineer

## Table of Contents

Summary of Tests.....	3
1. Dynamic Frequency Selection (DFS) test.....	4
1.1 Operating environment.....	4
1.2 UNII Device Description .....	4
1.2.1 Operating mode .....	5
1.3 Test Protocol and Requirements.....	5
1.4 DFS Detection Thresholds and Limitations of each Parameter .....	7
1.5 Radar Test Waveforms.....	8
1.6 Radar Waveform Calibration.....	11
1.6.1 Radar Waveform Calibration Plots & Data Traffic Plots.....	12
1.7 Test instruments, setup and test procedure.....	16
1.7.1 Test instruments.....	16
1.7.1.1 Deviation about the radar waveform.....	16
1.7.2 Test setup.....	16
1.7.3 Deviation about the procedure or equipment .....	16
1.8 DFS test results.....	17
1.8.1 Test summary .....	17
1.8.2 DFS test result .....	17
1.8.2.1 Channel Move time .....	17
1.8.2.2 Channel Closing Transmission Time.....	18
1.8.2.3 Non-Occupancy Period .....	21
1.9 Set-up Photo .....	22



### Summary of Tests

Test Item	Reference	Results
Dynamic Frequency Selection (DFS) test	15.407(h), FCC 06-96	Pass

## 1. Dynamic Frequency Selection (DFS) test

### 1.1 Operating environment

Temperature: 22 °C  
Relative Humidity: 55 %  
Atmospheric Pressure: 1008 hPa  
Test Date: Apr. 15, 2013~Jun. 05, 2013

### 1.2 UNII Device Description

1. The EUT operates in the following UNII bands:
  - a. 5250-5350 MHz
  - b. 5470-5725 MHz

2. Operating mode:

- Client (Slave) EUT: (without radar detection)  
The EUT was defined as the slave without radar detection function.  
There are no an “ad-hoc” or peer-to-peer mode for this device.

Associating peripheral:

The device was set up to associate with the master device (Product name: AP; Brand: 3Com; FCC ID: O9C-WA2620EAGN; Model: H3CWA2610E-AGN). The rated output power of the Client unit is < 23 dBm (EIRP). Therefore the required interference threshold level is -62 dBm.

3. Peripheral equipment:

Peripherals	Brand	Model No.	Serial No.	Description of Data Cable
Notebook PC	DELL	Latitude D610	5YWZK1S	N/A
AP	3Com	H3CWA2610E-AGN	N/A	N/A

4. The maximum EIRP of this device in 5250~5350MHz and 5470~5725MHz is 15.05 dBm at 802.11n HT20 channel 56; the Minimum EIRP of this device in 5250~5350MHz and 5470~5725MHz is 13.9 dBm at 802.11n HT40 channel 134. This device doesn't exceed 27dBm EIRP, so no transmit power control is implemented.

5. Stream the test file from the master device to the client device for IP Based(Load Based) and performed NTIA approved MPEG file (TestFile.mpg), NTIA test file refer as:

<http://ntiacsd.ntia.doc.gov/dfs/>

6. The type of system architecture is IP based , the data rates are 6 Mbps 、9 Mbps 、12 Mbps 、18 Mbps 、24 Mbps 、36 Mbps 、48 Mbps 、54Mbps for 802.11a mode; 6.5 Mbps, 13 Mbps, 19.5 Mbps, 26 Mbps, 39 Mbps, 52 Mbps, 58.5 Mbps, 65Mbps for 802.11n HT20 mode and 13.5 Mbps, 27 Mbps, 40.5 Mbps, 54 Mbps, 81 Mbps, 108 Mbps, 121.5 Mbps, 135 Mbps for 802.11n HT40 mode; the U-NII Channel bandwidths are 20MHz for 802.11a mode, 20MHz for 802.11n HT20 mode and 40MHz for 802.11n HT40 mode.

7. The time required for the client device to complete its power-on cycle is 18.4 seconds.
8. Antenna type: Unipole antenna  
Antenna gain: 4.7dBi  
Connector type: Fixed type
9. Information regarding the parameters of the detected Radar Waveforms is not available to the end user.

### **1.2.1 Operating mode**

Performance was measured at an active frequency of 5320 MHz and 5510 MHz, and the radar signal was centered at 5320 MHz and 5510 MHz.

One laptop PC is connected to the AP via a wire Ethernet connection. A separate laptop PC is used as a host computer for the Station. The AP and the Station transmit output levels are set to normal operating condition.

System architectures were used under IP based mode.

### **1.3 Test Protocol and Requirements**

For a Master Device, the DFS conformance requirements will be verified utilizing one short pulse radar type. Additionally, the Channel Move Time and Channel Closing Transmission Time requirements will be verified utilizing the long pulse radar type. The statistical performance check will be verified utilizing all radar type.

For a Client Device without DFS, the channel move time and channel closing transmission time requirements will be verified with one short pulse radar type.

For testing a Client Device with In-Service Monitoring, two configurations must be tested.

a. The Client Device detects the radar waveform:

The channel move time and channel closing transmission time requirements will be verified utilizing short pulse radar type and the long pulse radar type. The statistical performance check will be verified utilizing all radar types.

b. The Master Device detects the radar waveform:

The channel move time and channel closing transmission time requirements will be verified utilizing short pulse radar type.

A UNII network will employ a DFS function to:

- detect signals from radar systems and to avoid co-channel operation with these systems
  - provide on aggregate a Uniform Spreading of the Operating Channels across the entire band.
- This applies to the 5250-5350 MHz and/ or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a UNII device will operate in either Master Mode or Client Mode. UNII devices operating in Client Mode can only operate in a network controlled by a UNII device operating in Master Mode.

The tables as below summarize the information contained.

## Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Yes	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required
UNII Detection Bandwidth	Yes	Not required	Yes

## Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
UNII Detection Bandwidth	Yes	Not required	Yes

#### 1.4 DFS Detection Thresholds and Limitations of each Parameter

Maximum Transmit Power	Value (See Notes 1 and 2)
$\geq 200$ mW	-64 dBm
$\leq 200$ mW	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Parameter	Value
Non-occupancy Period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1)
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period (See Note 1 and 2)
UNII Detection Bandwidth	Minimum 80% of the UNII 99% transmission power bandwidth. (See Note 3)

Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

### 1.5 Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

#### Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Type 2 through 4. For Short Pulse Radar Type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Type 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of Short Pulse Radar Type 1-4.

#### Long Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse radar test signal. If more than 30 waveforms are used for the Long Pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst\_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear FM chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst\_Count. Each interval is of length  $(12,000,000 / \text{Burst\_Count})$  microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst\_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst\_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

**Graphical Representation of a Long Pulse radar Test Waveform**

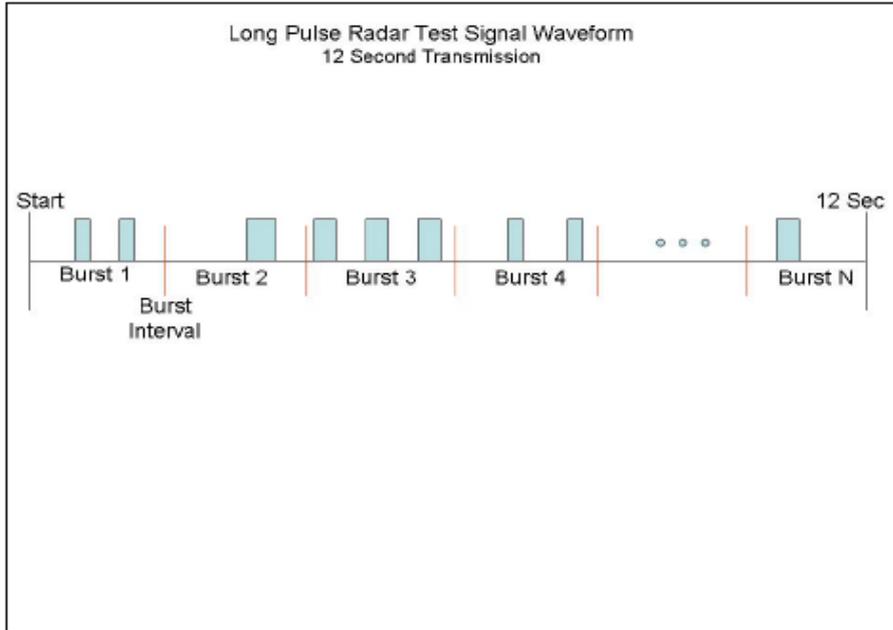

**Frequency Hopping Radar Test Waveforms**

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform.

The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.


### 1.6 Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer is used to establish the test signal level for each radar type. During this process, there were no transmissions by either Master or Client device. The spectrum analyzer was switched to the zero span (time domain) mode at the frequency of the radar waveform generator. The peak detection was utilized. The spectrum analyzer RBW and VBW were set to at least 3MHz.

The signal generator amplitude and/ or step attenuators were set so that the power level measured at the spectrum analyzer was equal to the DFS detection threshold that is required for the tests.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm.


#### Conducted calibrated setup diagram:

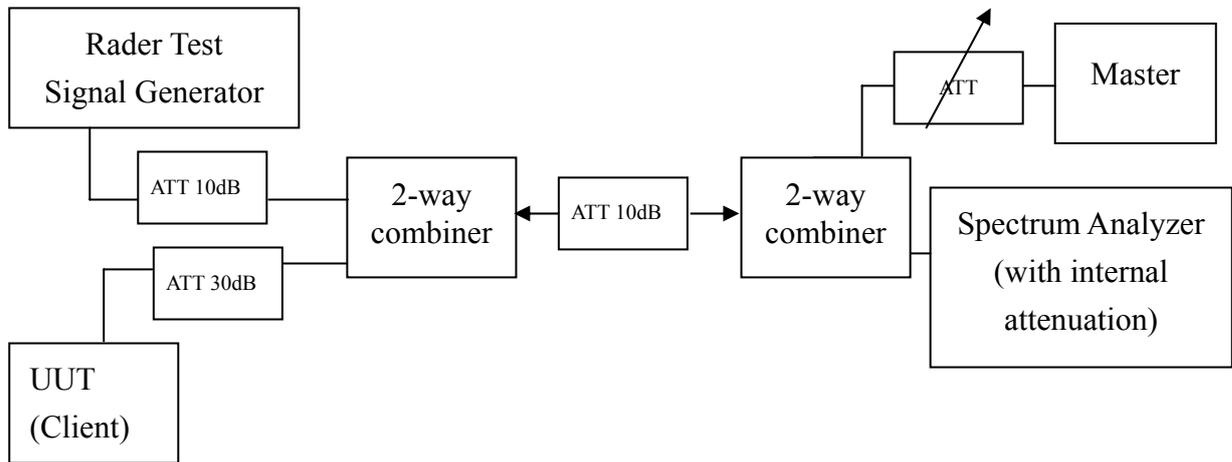




### 1.6.1 Radar Waveform Calibration Plots & Data Traffic Plots


#### Without Data Traffic Plot(Noise Plot) @ 5320 MHz

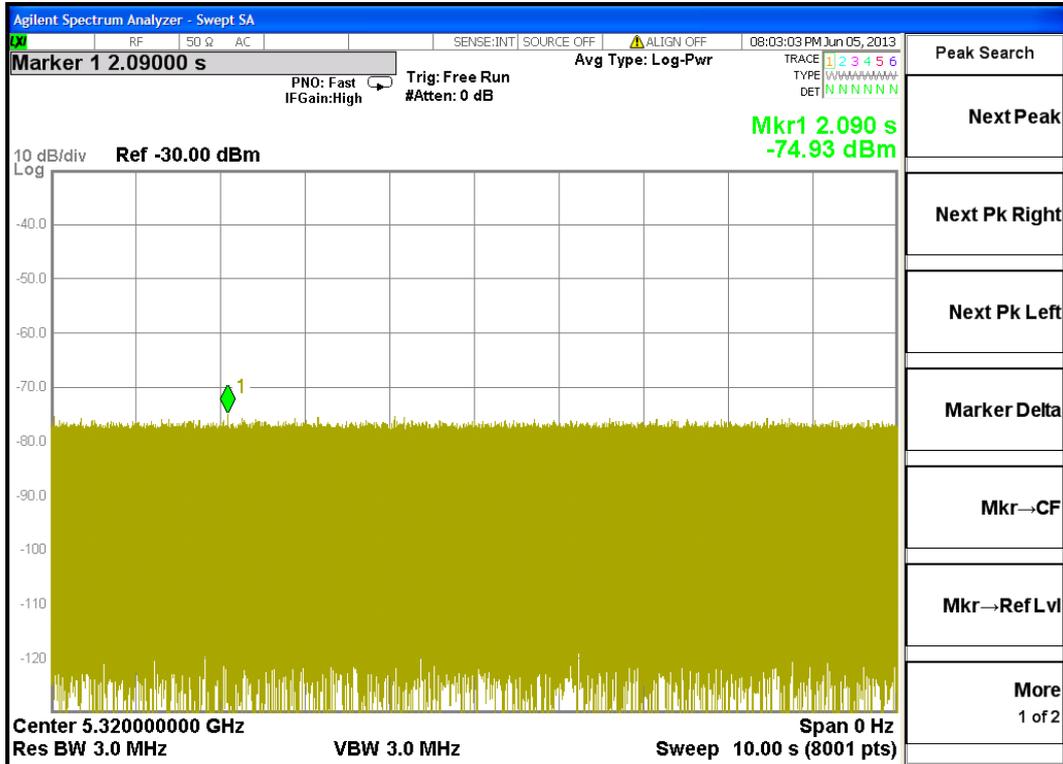


#### Master Data Traffic Plot @ 5320 MHz

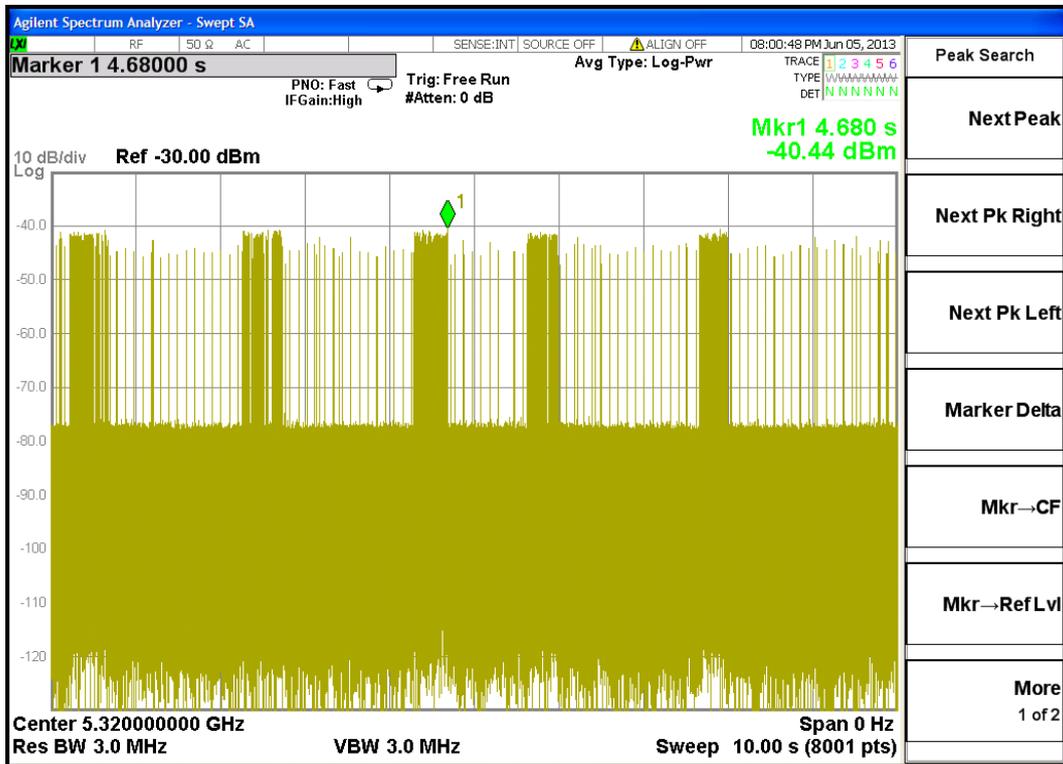


### Client(EUT) Data Traffic Plot @ 5320 MHz

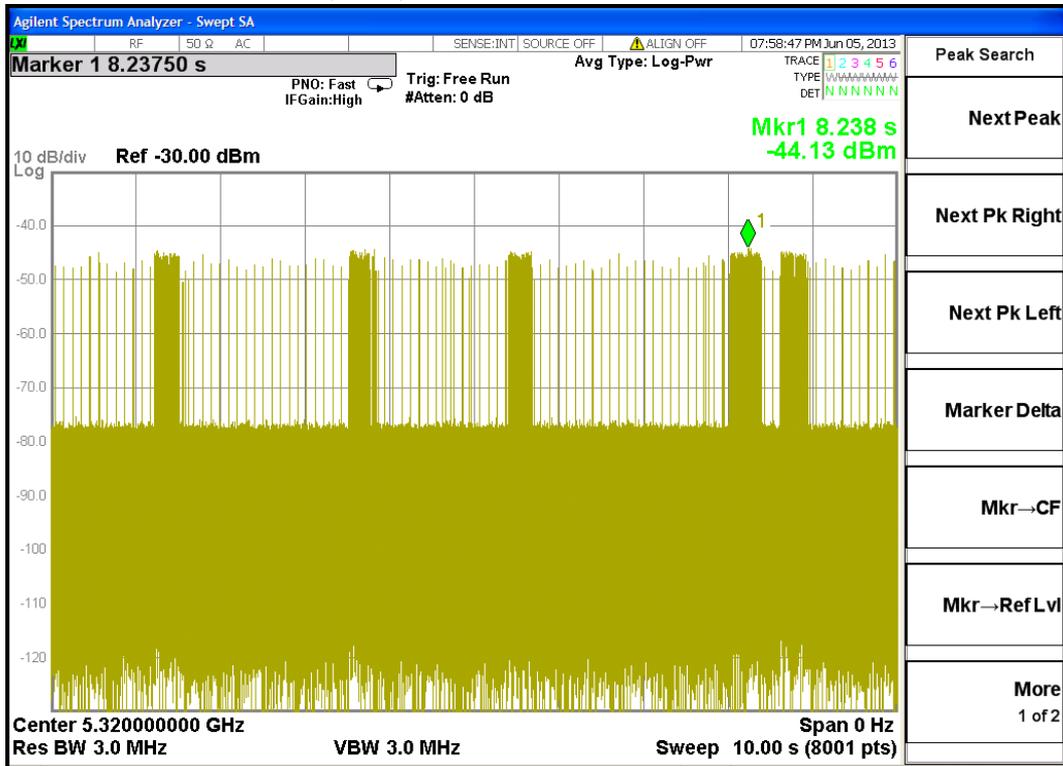


### Calibration Radar Type 1 @ 5320 MHz

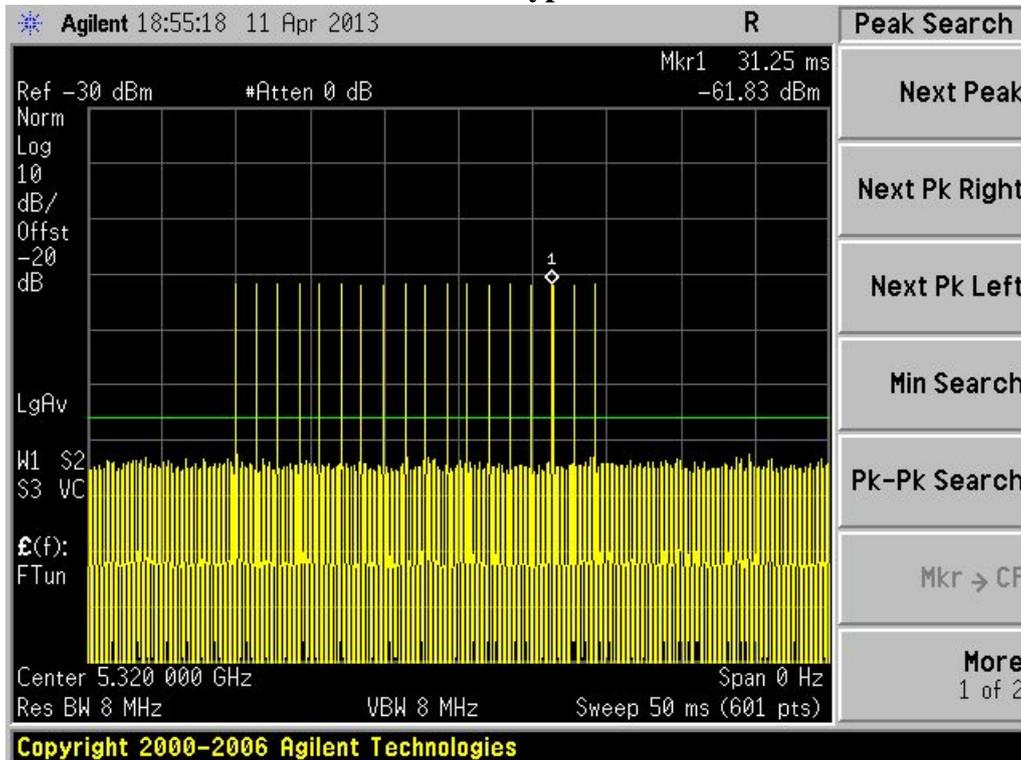


### Without Data Traffic Plot(Noise Plot) @ 5510 MHz

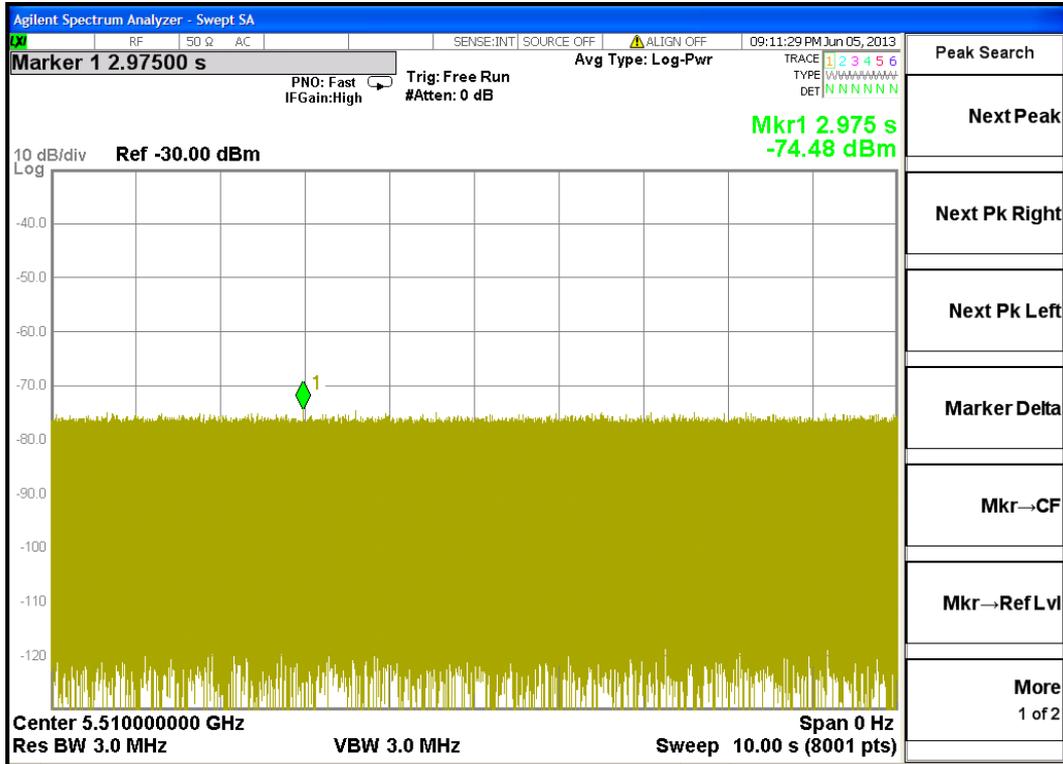


### Master Data Traffic Plot @ 5510 MHz

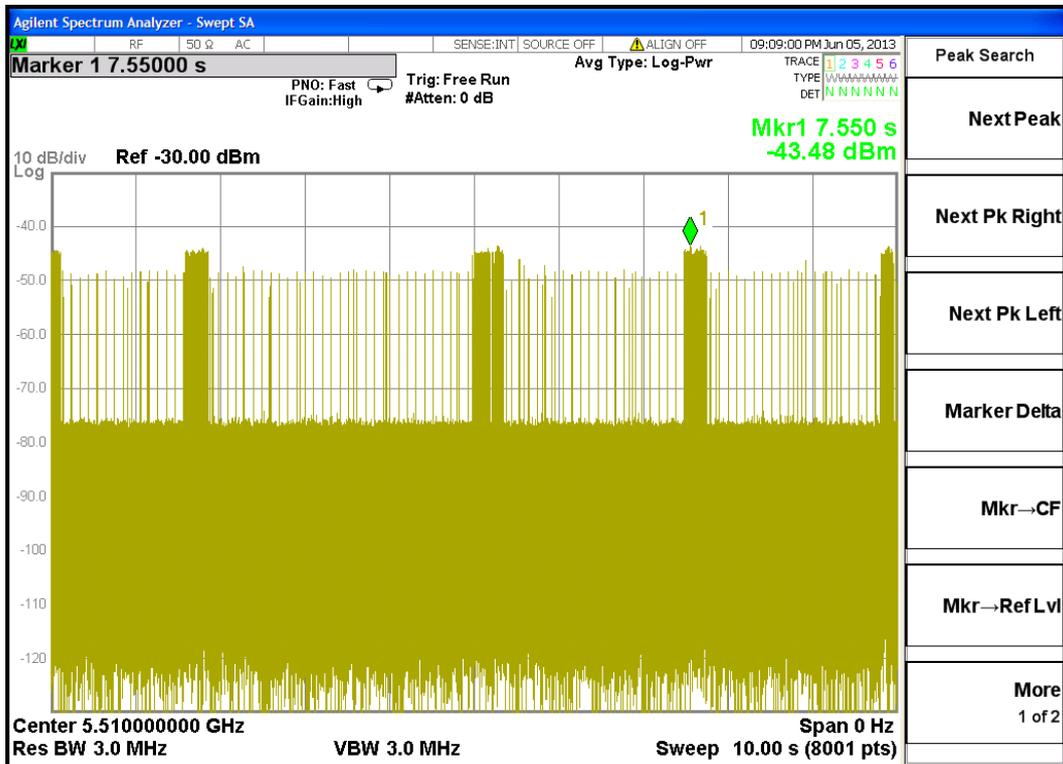

### Client(EUT) Data Traffic Plot @ 5510 MHz

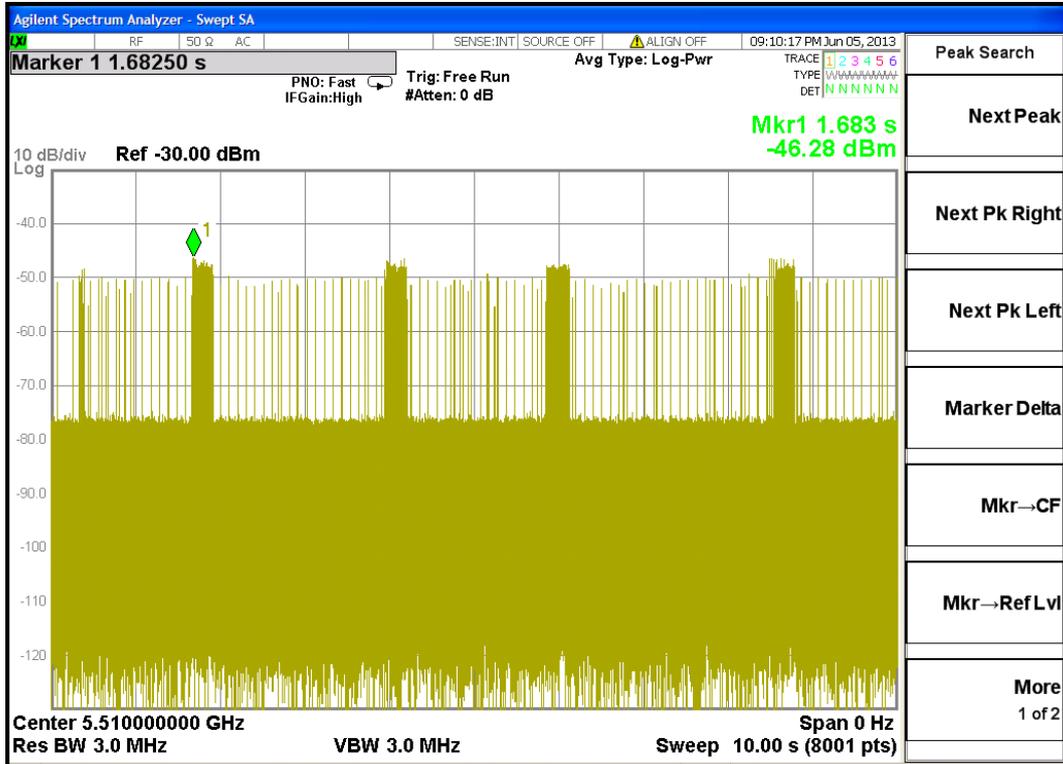

### Calibration Radar Type 1 @ 5510 MHz

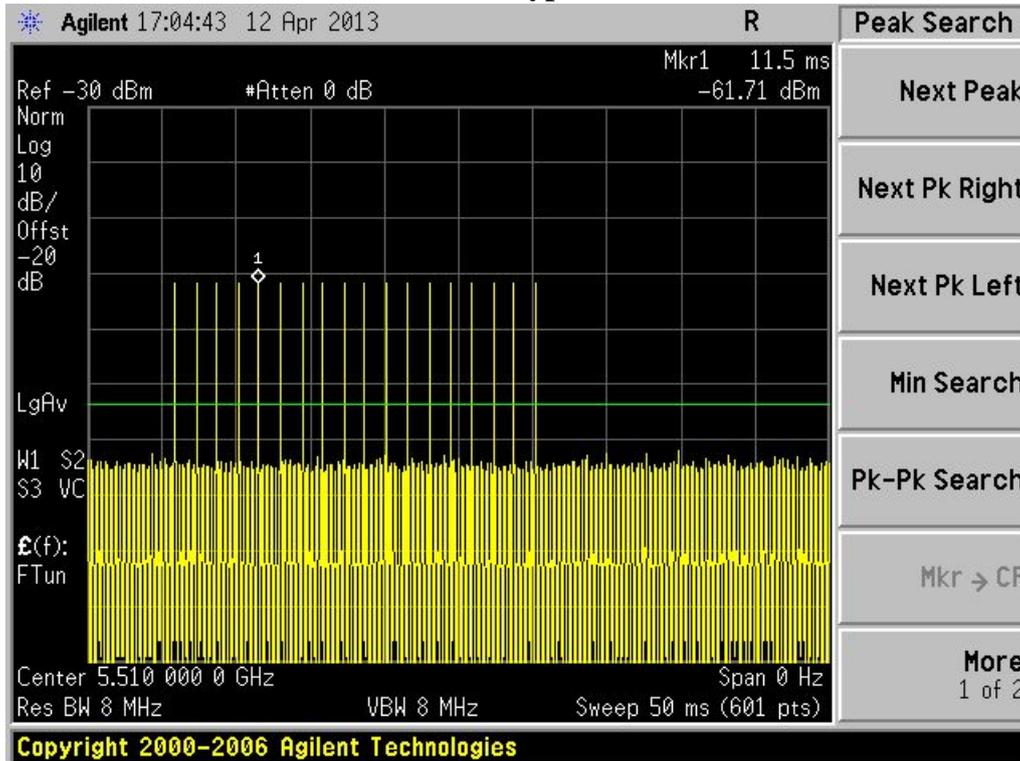

## 1.7 Test instruments, setup and test procedure

### 1.7.1 Test instruments

Equipment	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
PSA Spectrum Analyzer 3Hz-26.5GHz	Agilent	E4440A	MY46186191	2012/06/01	2013/06/01
ESG Vector Signal Generator 250kHz-6.0GHz	Agilent	E4438C	MY45094140	2012/05/11	2013/05/11


Note: The above equipments are within the valid calibration period.

#### 1.7.1.1 Deviation about the radar waveform

No deviation.

### 1.7.2 Test setup

Setup for Client with injection at the Master (Client Mode without DFS detection)

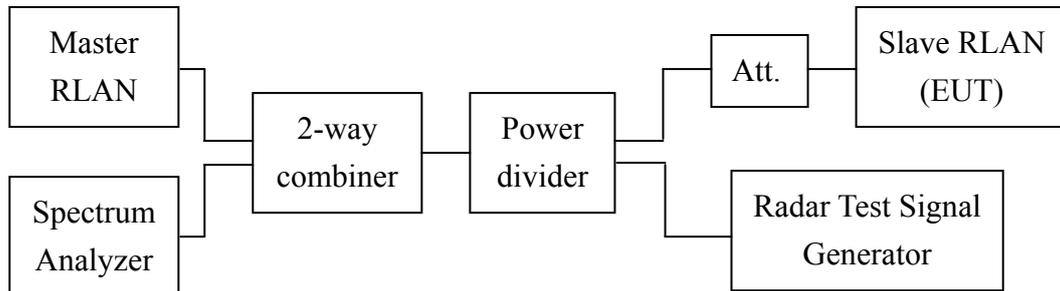

#### 1.7.3 Deviation about the procedure or equipment

No deviation.

### 1.8 DFS test results

#### 1.8.1 Test summary


This EUT was defined as the Client without DFS detection.

Clause	Parameter	Required	Pass/ Fail
A9.3	DFS Detection Threshold	Not Required	N/A
A9.3	Channel Availability Check Time	Not Required	N/A
A9.3	Channel Move Time	Applicable	Pass
A9.3	Channel Closing Transmission Time	Applicable	Pass
A9.3	Non-Occupancy Period	Applicable	Pass
A9.3	Uniform Spreading	Not Required	N/A
A9.3	UNII Detection Bandwidth	Not Required	N/A


#### 1.8.2 DFS test result

##### 1.8.2.1 Channel Move time

**Type 1: Channel Move Time @ 5320 MHz**

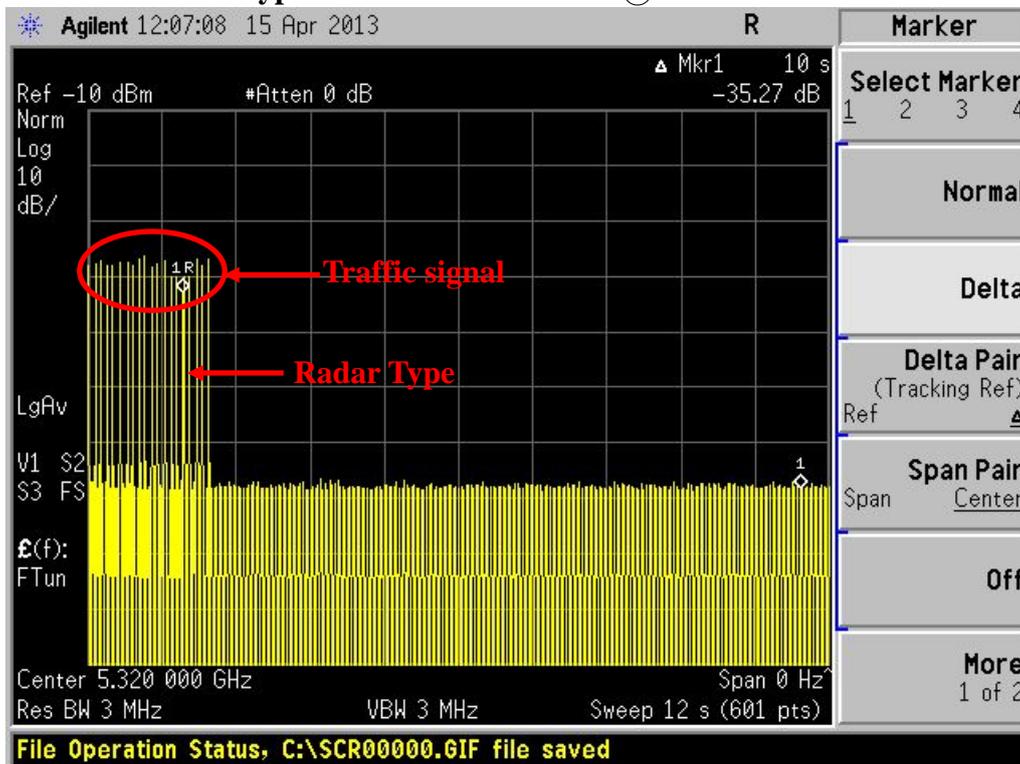


**Type 1: Channel Move Time @ 5510 MHz**

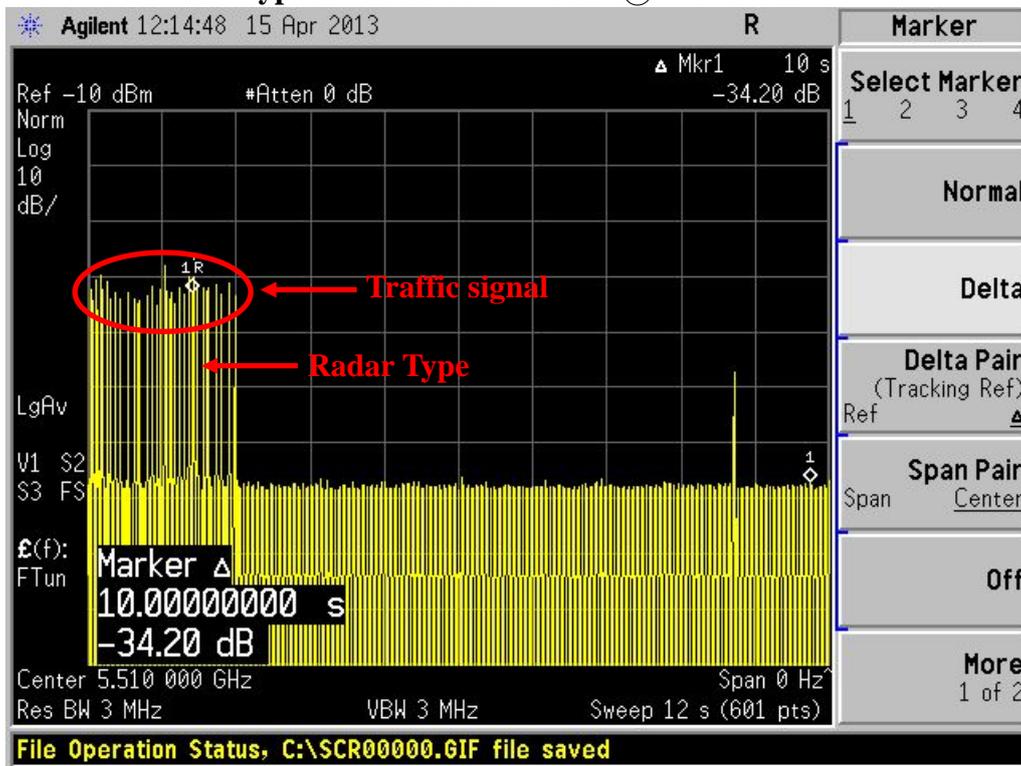


**1.8.2.2 Channel Closing Transmission Time**


**Channel Closing Transmission Time @ 5320 MHz (Radar Type 1)**

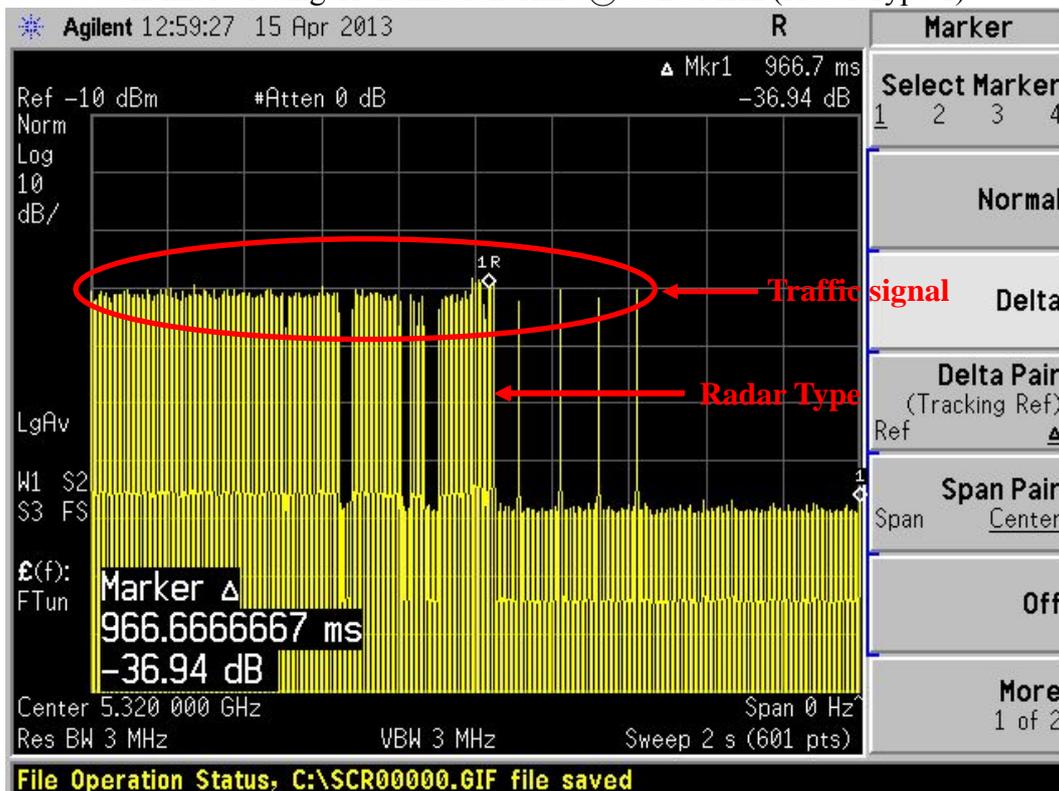


### Channel Closing Transmission Time @ 5320 MHz (Beacon Time)

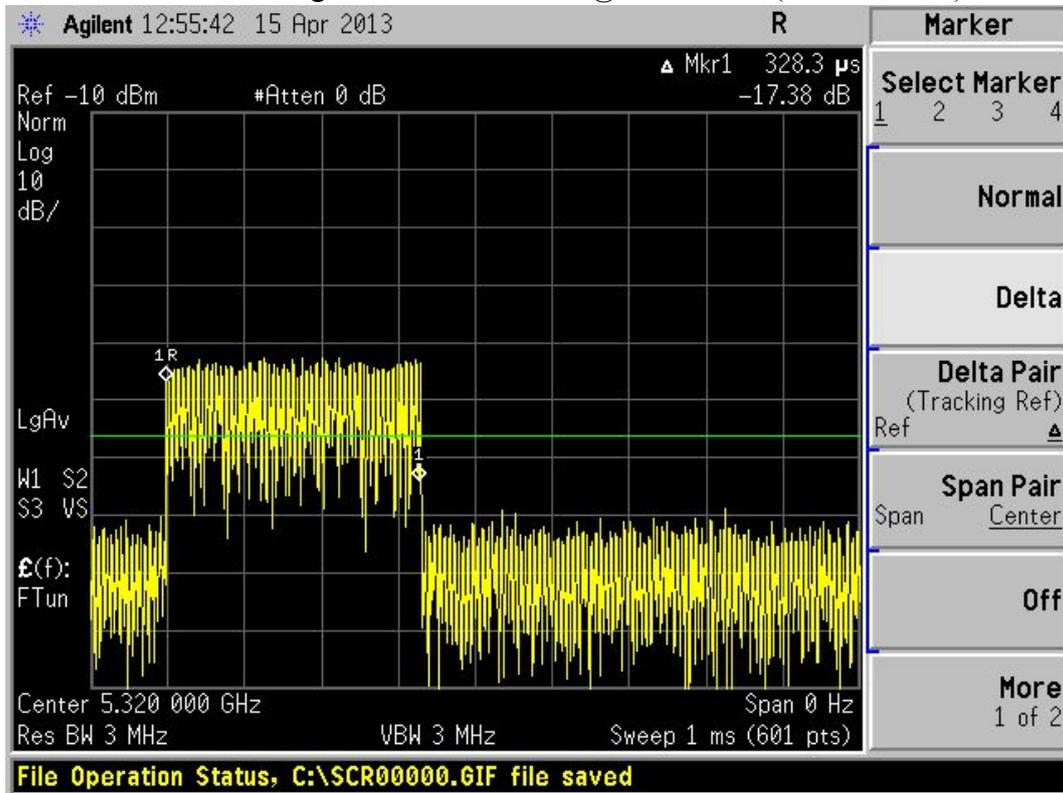

### Channel Closing Transmission Time @ 5510 MHz (Radar Type 1)

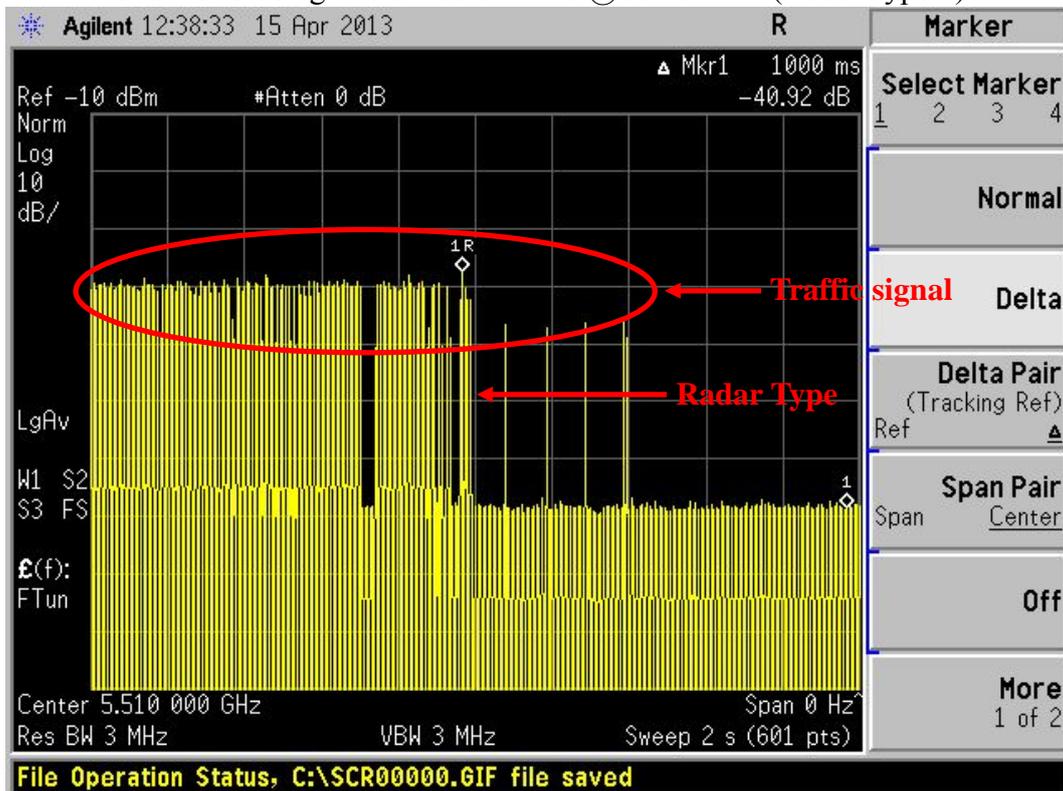

Channel Closing Transmission Time @ 5510 MHz (Beacon Time)

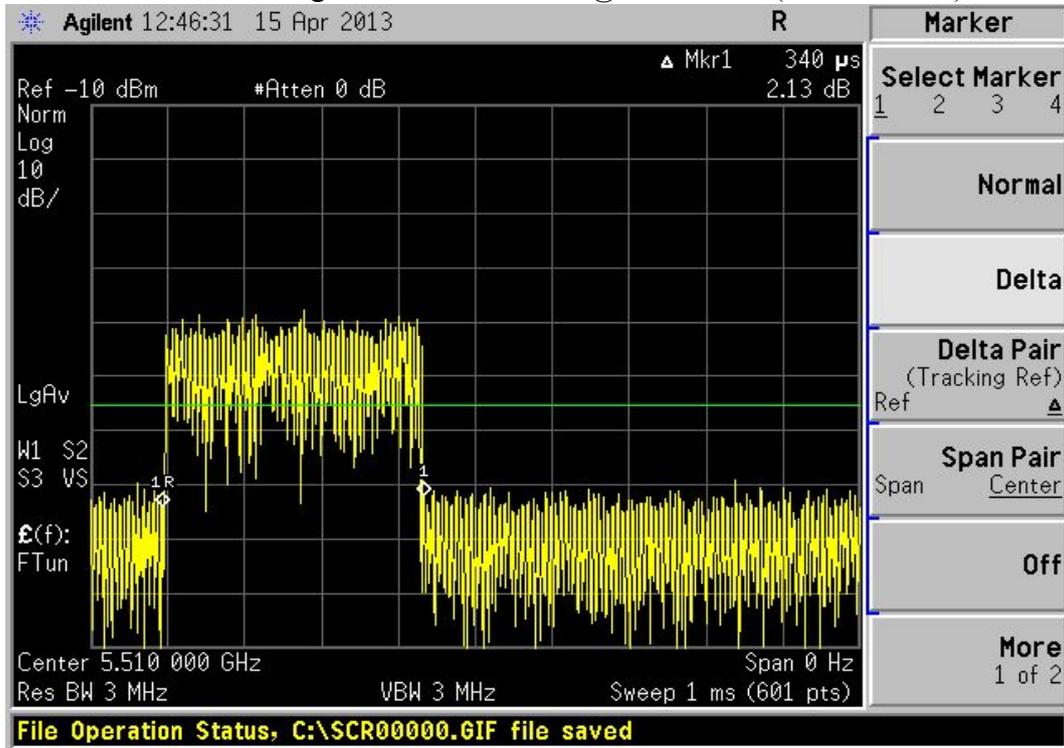


**Closing time:**


- (1) 5320MHz Radar Type 0:  $328.3 \mu\text{s} \times 5 = 1.642 \text{ ms}$
- (2) 5510MHz Radar Type 0:  $340\mu\text{s} \times 7 = 2.38 \text{ ms}$

## 1.8.2.3 Non-Occupancy Period

**Type 1: Non-Occupancy Period @ 5320 MHz**

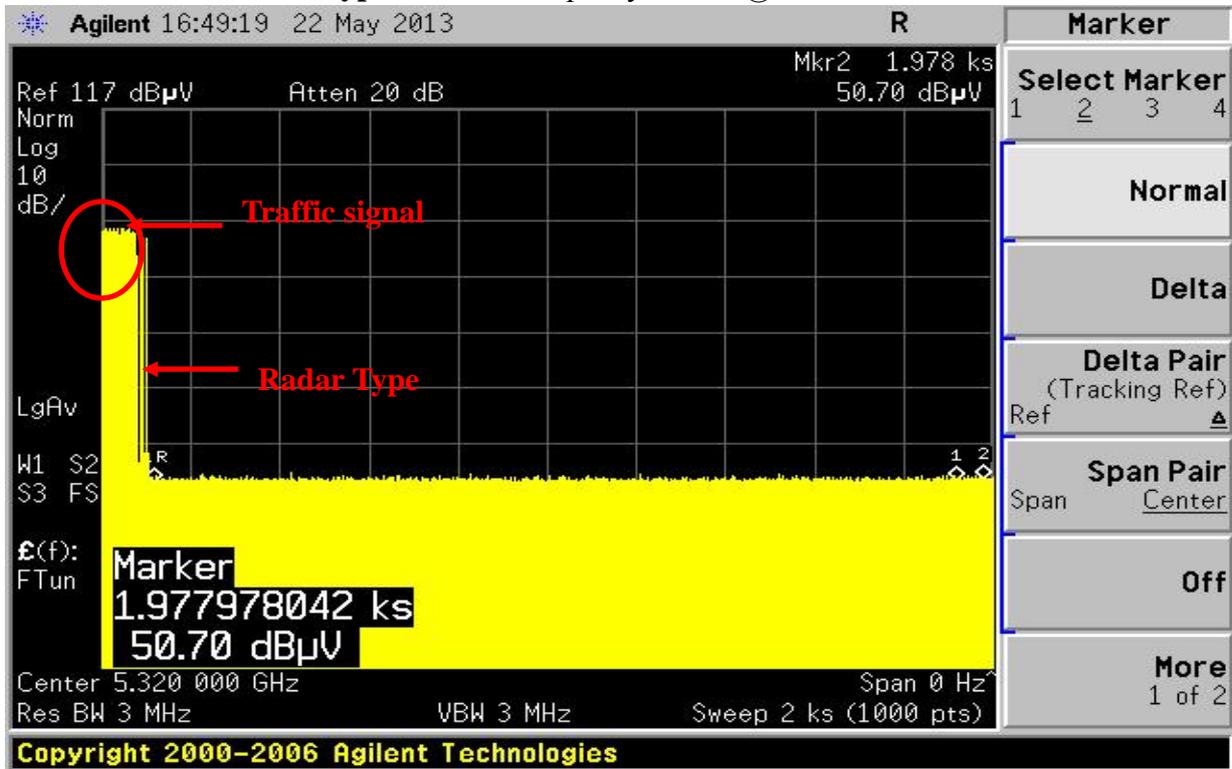

**Type 1: Non-Occupancy Period @ 5510 MHz**

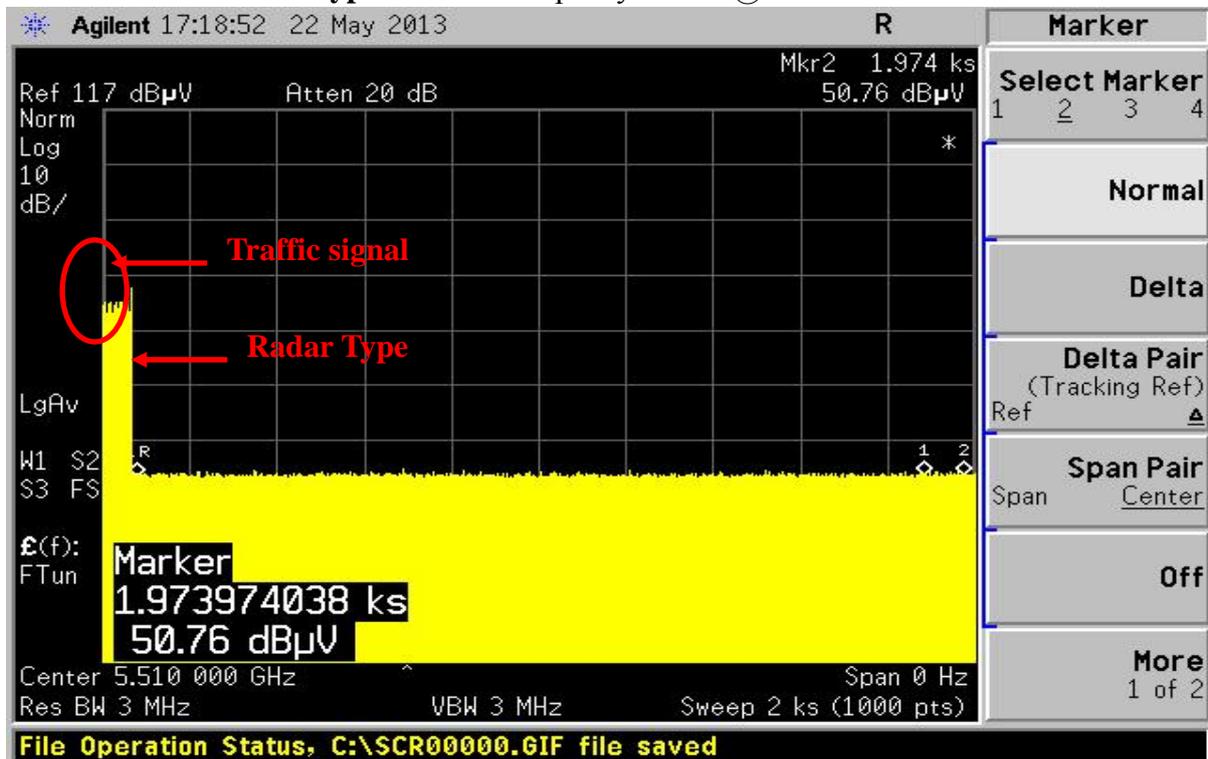

## 1.9 Set-up Photo

