



SAR TEST REPORT

Product Name	HUAWEI MediaPad X1 7.0
Model Name	7D-501u
FCC ID	QIS7D-501U
Client	Huawei Technologies Co., Ltd.
Manufacturer	Huawei Technologies Co., Ltd.
Date of issue	March 24, 2014

TA Technology (Shanghai) Co., Ltd.

TA Technology (Shanghai) Co., Ltd.
Test Report

GENERAL SUMMARY

Reference Standard(s)	<p>FCC 47CFR §2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices</p> <p>ANSI C95.1, 1992: Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.(IEEE Std C95.1-1991)</p> <p>IEEE Std 1528™-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.</p> <p>RSS-102 Issue 4 March 2010: Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands).</p> <p>KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03: SAR Measurement Requirements for 100 MHz to 6 GHz</p> <p>KDB 447498 D01 General RF Exposure Guidance v05r02: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies</p> <p>KDB 941225 D01 SAR test for 3G devices v02: SAR Measurement Procedures CDMA 20001x RTT, 1x Ev-Do, WCDMA, HSDPA/HSPA</p> <p>KDB 941225 D03 SAR Test Reduction GSM/GPRS/EDGE v01: Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE</p> <p>KDB 616217 D04 SAR for laptop and tablets v01r01: SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers</p> <p>KDB 648474 D04 Handset SAR v01r02 SAR Evaluation Considerations for Wireless Handsets</p> <p>KDB 941225 D02 HSPA and 1x Advanced v02r02 SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced</p>
Conclusion	<p>This portable wireless equipment has been measured in all cases requested by the relevant standards. Test results in Chapter 7 of this test report are below limits specified in the relevant standards for the tested bands only.</p> <p>General Judgment: Pass</p>
Comment	<p>The test result only responds to the measured sample.</p>

Approved by Weizhong Yang
Weizhong Yang
Director

Revised by Minbao Ling
Minbao Ling
SAR Manager

Performed by Yi Zhang
Yi Zhang
SAR Engineer

TABLE OF CONTENT

1. General Information	5
1.1. Notes of the Test Report.....	5
1.2. Testing Laboratory.....	5
1.3. Applicant Information	6
1.4. Manufacturer Information.....	6
1.5. Information of EUT.....	7
1.6. The Maximum Reported SAR _{1g}	9
1.7. Maximum Conducted Power of Each Tested Mode	10
1.8. Test Date	10
2. SAR Measurements System Configuration.....	11
2.1. SAR Measurement Set-up.....	11
2.2. DASY5 E-field Probe System	12
2.2.1. EX3DV4 Probe Specification	12
2.2.2. E-field Probe Calibration.....	13
2.3. Other Test Equipment	13
2.3.1. Device Holder for Transmitters	13
2.3.2. Phantom	14
2.4. Scanning Procedure	14
2.5. Data Storage and Evaluation	16
2.5.1. Data Storage.....	16
2.5.2. Data Evaluation by SEMCAD	16
3. Laboratory Environment.....	18
4. Tissue-equivalent Liquid	19
4.1. Tissue-equivalent Liquid Ingredients.....	19
4.2. Tissue-equivalent Liquid Properties	21
5. System Check.....	22
5.1. Description of System Check.....	22
5.2. System Check Results.....	25
6. Operational Conditions during Test	26
6.1. General Description of Test Procedures	26
6.2. Test Configuration	26
6.2.1. GSM Test Configuration.....	26
6.2.2. UMTS Test Configuration.....	28
6.2.3. HSDPA Test Configuration	28
6.2.4. HSUPA Test Configuration	31
6.2.5. WIFI Test Configuration	33
6.3. Measurement Variability.....	33
6.4. Test Positions.....	34
6.4.1. Against Phantom Head.....	34
6.4.2. Body Configuration	34
6.4.3. SAR test reduction and exclusion guidance.....	34
7. Test Results	37
7.1. Conducted Power Results	37

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RHA1403-0022SAR

Page 4 of 174

7.2. SAR Test Results	42
7.2.1. GSM 850 (GSM/GPRS/EGPRS)	42
7.2.2. GSM 1900 (GSM/GPRS/EGPRS)	43
7.2.3. UMTS Band II (WCDMA/HSDPA/HSUPA).....	45
7.2.4. UMTS Band V (WCDMA/HSDPA/HSUPA)	46
7.2.5. WIFI (802.11b, WIFI)	47
7.2.6. BT	48
7.3. Simultaneous Transmission Conditions	49
8. Measurement Uncertainty	54
9. Main Test Instruments	55
ANNEX A: Test Layout	56
ANNEX B: System Check Results	60
ANNEX C: Graph Results	66
ANNEX D: Probe Calibration Certificate	129
ANNEX E: D835V2 Dipole Calibration Certificate	140
ANNEX F: D1900V2 Dipole Calibration Certificate	148
ANNEX G: D2450V2 Dipole Calibration Certificate	156
ANNEX H: DAE4 Calibration Certificate.....	164
ANNEX I: The EUT Appearances and Test Configuration	169

1. General Information

1.1. Notes of the Test Report

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L2264.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test. This report only refers to the item that has undergone the test.

This report alone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

If the electronic report is inconsistent with the printed one, it should be subject to the latter.

1.2. Testing Laboratory

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Yang Weizhong
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: yangweizhong@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RHA1403-0022SAR

Page 6 of 174

1.3. Applicant Information

Company: Huawei Technologies Co., Ltd.
Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian,
Longgang District
Address: Shenzhen
518129
P.R.China

1.4. Manufacturer Information

Company: Huawei Technologies Co., Ltd.
Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian,
Longgang District
Address: Shenzhen
518129
P.R.China

TA Technology (Shanghai) Co., Ltd.

Test Report

Report No. RHA1403-0022SAR

Page 7 of 174

1.5. Information of EUT

General Information

Device Type:	Portable Device	
Exposure Category:	Uncontrolled Environment / General Population	
State of Sample:	Prototype Unit	
IMEI:	869077010010724	
Hardware Version:	SH1S7501LM	
Software Version:	7D-501uV100R001C001	
Antenna Type:	Internal Antenna	
Device Operating Configurations:		
Tested Mode(s):	GSM 850/ GSM 1900; UMTS Band II/ UMTS Band V; Bluetooth; WiFi(802.11b/g/n HT20/ n HT40);	
Test Modulation:	(GSM)GMSK; (UMTS)QPSK; (WiFi)BPSK	
Device Class:	B	
HSUPA UE Category:	6	
HSPA+ downlink UE Category:	14	
DC-HSDPA UE Category:	24	
GPRS Multislot Class(12):	Max Number of Timeslots in Uplink	4
	Max Number of Timeslots in Downlink	4
	Max Total Timeslot	5
EGPRS Multislot Class(12):	Max Number of Timeslots in Uplink	4
	Max Number of Timeslots in Downlink	4
	Max Total Timeslot	5
Power Class:	GSM 850: 4	
	GSM 1900: 1	
	UMTS Band II: 3	
	UMTS Band V: 3	
Power Level:	GSM 850: tested with power level 5	
	GSM 1900: tested with power level 0	
	UMTS Band II: tested with power control all up bits	
	UMTS Band V: tested with power control all up bits	
Test Channel: (Low - Middle - High)	128 -190 - 251 512 - 661 - 810 9262 - 9400 - 9538	(GSM 850) (GSM 1900) (UMTS Band II)

TA Technology (Shanghai) Co., Ltd. Test Report

Report No. RHA1403-0022SAR

Page 8 of 174

	4132 - 4183 - 4233	(UMTS Band V)	
	0-39-78	(Bluetooth)	
	1-6-11	(802.11b/g/n HT20)	
	3-6-9	(802.11n HT40)	
Test Frequency Range(s):	Mode	Tx (MHz)	Rx (MHz)
	GSM 850	824.2 ~ 848.8	869.2 ~ 893.8
	GSM 1900	1850.2 ~ 1909.8	1930.2 ~ 1989.8
	UMTS Band II	1852.4 ~ 1907.6	1932.4 ~ 1987.6
	UMTS Band V	826.4 ~ 846.6	871.4 ~ 891.6
	Bluetooth	2402 ~ 2480	2402 ~ 2480
	WIFI	2412 ~ 2462	2412 ~ 2462

Equipment Under Test (EUT) has a GSM/UMTS antenna that is used for Tx/Rx, the second is BT/WIFI antenna that can be used for Tx/Rx.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

TA Technology (Shanghai) Co., Ltd.
Test Report

1.6. The Maximum Reported SAR_{1g}

Head SAR Configuration

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR _{1g} 1.6 W/kg	
			Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
GSM 850	Right, cheek	190/836.6	0.169	0.224
GSM 1900	Right, cheek	810/1909.8	0.840	1.149
UMTS Band II	Right, cheek	9400/1880	0.356	0.414
UMTS Band V	Right, cheek	4183/836.6	0.255	0.295
WiFi(802.11b)	Right, cheek	6/2437	0.017	0.017

Body SAR Configuration

Mode	Test Position	Channel /Frequency(MHz)	Limit SAR _{1g} 1.6 W/kg	
			Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
2Txslots GPRS 850	Test Position 1/ Back side	190/836.6	0.466	0.623
2Txslots GPRS 1900	Test Position 1/ Back side	661/1880	1.290	1.464
UMTS Band II	Test Position 1/ Back side	9400/1880	0.596	0.694
UMTS Band V	Test Position 1/ Back side	4183/836.6	0.666	0.770
WiFi(802.11b)	Test Position 1/ Back side	6/2437	0.564	0.573

TA Technology (Shanghai) Co., Ltd.
Test Report

1.7. Maximum Conducted Power of Each Tested Mode

Mode		Maximum Burst Conducted Power (dBm)	Maximum Average Power (dBm)
GSM 850	GSM	32.91	23.88
	GPRS(GMSK), 2 Txslots	30.74	24.72
	EGPRS(GMSK), 2 Txslots	30.74	24.72
GSM 1900	GSM	29.71	20.68
	GPRS(GMSK), 2 Txslots	28.45	22.43
	EGPRS(GMSK), 2 Txslots	28.45	22.43

Mode	Maximum Conducted Power (dBm)
UMTS Band II	23.44
UMTS Band V	23.55
WiFi(802.11b)	14.93

Note: The detail Power refers to Table 14 (Conducted Power Measurement Results).

1.8. Test Date

The test performed from March 14, 2014 to March 19, 2014.

2. SAR Measurements System Configuration

2.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

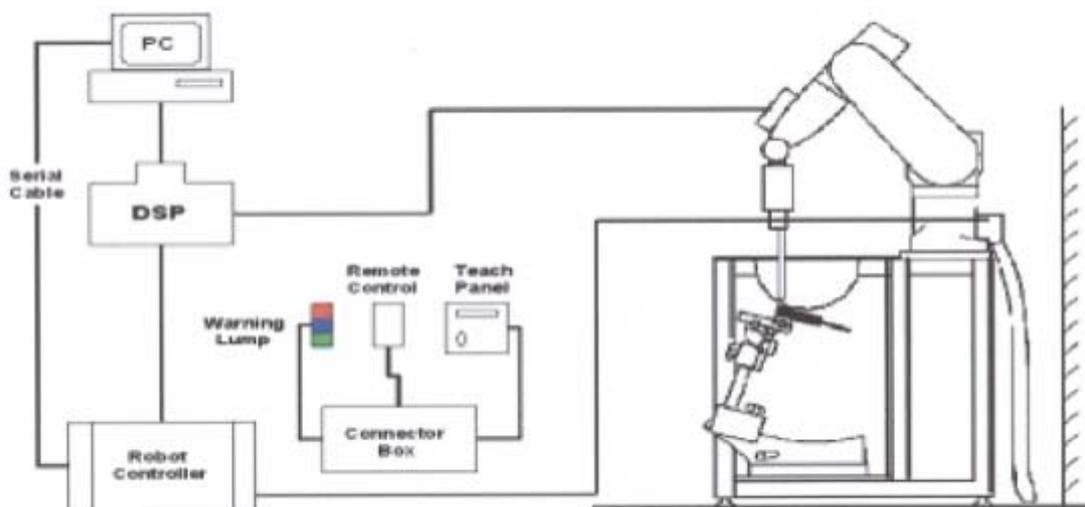


Figure 1. SAR Lab Test Measurement Set-up

2.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

2.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 2. EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

2.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m³).

2.3. Other Test Equipment

2.3.1. Device Holder for Transmitters

Construction: Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.) It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM, ELI4 and SAM v6.0 Phantoms.

Material: POM, Acrylic glass, Foam

2.3.2. Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG do symmetric probes and dipoles.

Shell Thickness	2±0.2 mm
Filling Volume	Approx. 30 liters
Dimensions	190×600×0 mm (H x L x W)



Figure 4.ELI4 Phantom

2.4. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. ± 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)

TA Technology (Shanghai) Co., Ltd.

Test Report

- **Area Scan**

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing is set according to FCC KDB Publication 865664. During scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard’s method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard’s method for extrapolation.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

Table 1: Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{area}, \Delta y_{area}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{zoom}, \Delta y_{zoom}$)	Maximum Zoom Scan Spatial Resolution (mm) $\Delta z_{zoom}(n)$	Minimum Zoom Scan Volume (mm) (x,y,z)
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≥ 22

2.5. Data Storage and Evaluation

2.5.1. Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

2.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

TA Technology (Shanghai) Co., Ltd.
Test Report

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot})^2 \cdot \sigma / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

3. Laboratory Environment

Table 2: The Requirements of the Ambient Conditions

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

4. Tissue-equivalent Liquid

4.1. Tissue-equivalent Liquid Ingredients

The liquid is consisted of water, salt, Glycol, Sugar, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The table 3 and table 4 show the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB 865664 D01.

Table 3: Composition of the Head Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Brain) 835MHz
Water	41.45
Sugar	56
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.9$

MIXTURE%	FREQUENCY(Brain) 1900MHz
Water	55.242
Glycol monobutyl	44.452
Salt	0.306
Dielectric Parameters Target Value	f=1900MHz $\epsilon=40.0$ $\sigma=1.40$

MIXTURE%	FREQUENCY(Brain) 2450MHz
Water	62.7
Glycol	36.8
Salt	0.5
Dielectric Parameters Target Value	f=2450MHz $\epsilon=39.20$ $\sigma=1.80$

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 4: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body) 835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

MIXTURE%	FREQUENCY(Body) 2450MHz
Water	73.2
Glycol	26.7
Salt	0.1
Dielectric Parameters Target Value	f=2450MHz $\epsilon=52.70$ $\sigma=1.95$

TA Technology (Shanghai) Co., Ltd.
Test Report

4.2. Tissue-equivalent Liquid Properties

Table 5: Dielectric Performance of Tissue Simulating Liquid

Frequency	Test Date	Temp °C	Measured Dielectric Parameters		Target Dielectric Parameters		Limit (Within ±5%)	
			ϵ_r	σ (s/m)	ϵ_r	σ (s/m)	Dev ϵ_r (%)	Dev σ (%)
835MHz (head)	2014-3-15	21.5	41.4	0.93	41.50	0.90	-0.24	3.33
1900MHz (head)	2014-3-17	21.5	39.6	1.43	40.00	1.40	-1.00	2.14
2450MHz (head)	2014-3-19	21.5	39.1	1.80	39.20	1.80	-0.26	0.00
835MHz (body)	2014-3-14	21.5	55.9	0.99	55.20	0.97	1.27	2.06
1900MHz (body)	2014-3-17	21.5	52.6	1.52	53.30	1.52	-1.31	0.00
2450MHz (body)	2014-3-18	21.5	52.1	1.99	52.70	1.95	-1.14	2.05

5. System Check

5.1. Description of System Check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyzer. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 5.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

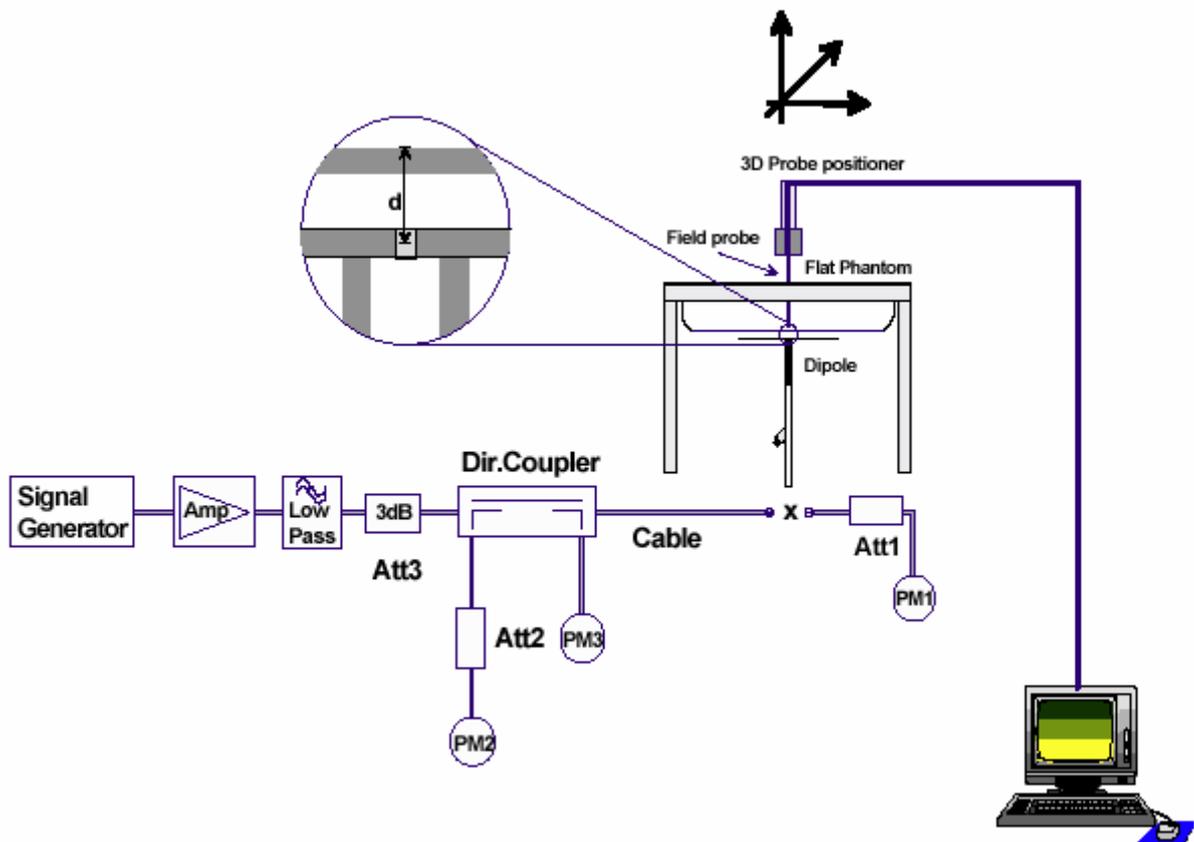


Figure 5. System Check Set-up

TA Technology (Shanghai) Co., Ltd. Test Report

Justification for Extended SAR Dipole Calibrations

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< - 20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB 865664 D01:

Dipole D835V2 SN: 4d020				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
8/26/2011	-27.7	/	52.9	/
8/25/2012	-29.1	5.0%	55.0	2.1Ω
8/24/2013	-26.6	4.1%	55.3	2.4Ω
Body Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
8/26/2011	-25.1	/	48.7	/
8/25/2012	-24.3	3.2 %	50.6	1.9Ω
8/24/2013	-24.7	1.6%	51.1	2.4Ω

Dipole D1900V2 SN: 5d060				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
8/31/2011	-22.3	/	52.6	/
8/30/2012	-21.7	2.7%	51.4	1.2Ω
8/29/2013	-21.4	4.2%	50.5	2.1Ω
Body Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
8/31/2011	-21.3	/	47.3	/
8/30/2012	-20.9	1.9%	45.9	1.4Ω
8/29/2013	-20.4	4.4%	44.8	2.5Ω

TA Technology (Shanghai) Co., Ltd.
Test Report

Report No. RHA1403-0022SAR

Page 24 of 174

Dipole D2450V2 SN: 786				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
8/29/2011	-25.5	/	55.0	/
8/28/2012	-26.8	5.1%	56.5	1.5 Ω
8/27/2013	-26.4	3.5%	56.9	1.9 Ω
Body Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
8/29/2011	-29.0	/	50.4	/
8/28/2012	-29.9	3.1%	52.1	1.7 Ω
8/27/2013	-28.2	2.8%	52.7	2.3 Ω

TA Technology (Shanghai) Co., Ltd.
Test Report

5.2. System Check Results

Table 6: System Check in Head Tissue Simulating Liquid

Frequency	Test Date	Dielectric Parameters		Temp (°C)	250mW Measured SAR _{1g}	1W Normalized SAR _{1g}	1W Target SAR _{1g}	Limit (±10% Deviation)
		ε _r	σ(s/m)		(W/kg)			
835MHz	2014-3-15	41.4	0.93	21.5	2.44	9.76	9.34	4.50
1900MHz	2014-3-17	39.6	1.43	21.5	9.48	37.92	40.30	-5.91
2450MHz	2014-3-19	39.1	1.80	21.5	13.70	54.8	53.80	1.86

Note: 1. The graph results see ANNEX B.
2. Target Values used derive from the calibration certificate

Table 7: System Check in Body Tissue Simulating Liquid

Frequency	Test Date	Dielectric Parameters		Temp (°C)	250mW Measured SAR _{1g}	1W Normalized SAR _{1g}	1W Target SAR _{1g}	Limit (±10% Deviation)
		ε _r	σ(s/m)		(W/kg)			
835MHz	2014-3-14	55.9	0.99	21.5	2.52	10.08	9.46	6.55
1900MHz	2014-3-17	52.6	1.52	21.5	9.82	39.28	41.70	-5.80
2450MHz	2014-3-18	52.1	1.99	21.5	13.20	52.80	51.70	2.13

Note: 1. The graph results see ANNEX B.
2. Target Values used derive from the calibration certificate

6. Operational Conditions during Test

6.1. General Description of Test Procedures

A communication link is set up with a System Simulator (SS) by air link, and a call is established. The EUT is commanded to operate at maximum transmitting power.

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

6.2. Test Configuration

6.2.1. GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a System Simulator (SS) by air link. Using E5515C the power level is set to "5" for GSM 850, set to "0" for GSM 1900. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. Since the EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

GSM 850

GPRS (GMSK) :

Number of timeslots in uplink assignment	reduction of maximum output power, (dB)
1	0
2	2
3	4
4	6

EGPRS(8PSK):

TA Technology (Shanghai) Co., Ltd.
Test Report

Number of timeslots in uplink assignment	reduction of maximum output power, (dB)
1	0
2	2
3	4
4	6

EGPRS(GMSK):

Number of timeslots in uplink assignment	reduction of maximum output power, (dB)
1	0
2	2
3	4
4	6

GSM 1900

GPRS (GMSK) :

Number of timeslots in uplink assignment	reduction of maximum output power, (dB)
1	0
2	2
3	4
4	6

EGPRS(8PSK):

Number of timeslots in uplink assignment	reduction of maximum output power, (dB)
1	0
2	2
3	4
4	6

EGPRS(GMSK):

Number of timeslots in uplink assignment	reduction of maximum output power, (dB)
1	0
2	2
3	4
4	6

6.2.2. UMTS Test Configuration

6.2.2.1. Output power Verification

Maximum output power is verified on the High, Middle and Low channel according to the procedures described in section 5.2 of 3GPP TS 34. 121, using the appropriate RMC or AMR with TPC(transmit power control) set to all up bits for WCDMA/HSDPA or applying the required inner loop power control procedures to the maximum output power while HSUPA is active. Results for all applicable physical channel configuration (DPCCH, DPDCH_n and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configuration that are not supported by the DUT or can not be measured due to technical or equipment limitations should be clearly identified

6.2.2.2. Head SAR Measurements

SAR for head exposure configurations in voice mode is measured using a 12.2kbps RMC with TPC bits configured to all up bits. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2kbps AMR is less than 1/4 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2kbps AMR with a 3.4 kbps SRB(Signaling radio bearer) using the exposure configuration that results in the highest SAR in 12.2kbps RMC for that RF channel.

6.2.2.3. Body SAR Measurements

SAR for body exposure configurations in voice and data modes is measured using 12.2kbps RMC with TPC bits configured to all up bits. SAR for other spreading codes and multiple DPDCH_n, when supported by the DUT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCH_n configuration, are less than 1/4 dB higher than those measured in 12.2kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCH_n using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCH_n are supported by the DUT, it may be necessary to configure additional DPDCH_n for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

6.2.3. HSDPA Test Configuration

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c, β_d), and HS-DPCCH power offset

TA Technology (Shanghai) Co., Ltd.

Test Report

parameters(Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 8: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (note 1, note 2)	CM(dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$

Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{hs} = 30/15$) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ ($A_{hs} = 24/15$) with $\beta_{hs} = 24/15 * \beta_c$.

Note3: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 9: Settings of required H-Set 1 QPSK in HSDPA mode

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload (N_{INF})	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

6.2.3.1. DC-HSDPA Test Configuration

body SAR is also measured for DC-HSDPA when the maximum average output of each RF channel with DC-HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for DC-HSDPA is measured using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

Configure DC-HSDPA parameters for base station

a) Set up the HSDPA RB Test Mode Parameters

- RB Test HS-DSCH Configuration Type = User Defined
- RB Test User Defined HS-DSCH MAC entity = MAC-ehs (Note 1)
- RB Test User Defined HARQ Processes = 6 (Note 2)
- RB Test User Defined UE IR Buffer Allocation = Implicit
- RB Test User Defined DC-HSDPA State = On
- RB Test Mode DC-HSDPA DPCH Loopback State = On

b) Set up the Serving Cell Parameters

- RB Test User Defined 64QAM State =On
- RB Test User Defined Active HS-PDSCHs =15
- RB Test User Def Transport Block Size Index =62
- RB Test User Defined Modulation Type =64QAM
- RB Test User Defined Inter-TTI Interval =1

c) Set up the Secondary Serving Cell Parameters

- RB Test User Def Secondary Cell 64QAM State =On
- RBTM User Def Sec Cell Active HS-PDSCHs = 15
- RBTM User Def Sec Cell TB Size Index = 62
- RBTM User Def Sec Cell Modulation Type =64QAM
- RBTM User Def Sec Cell Inter-TTI Interval = 1

d) Set the HSDPA Conn DL Channel Levels

- HSDPA Cell 1 Connected CPICH Level = -8
- HSDPA Cell 1 Connected P-CCPCH/SCH Level = -20
- HSDPA Cell 1 Connected PICH Level = off
- HSDPA Cell 1 Connected DPCH Level = -30
- HSDPA Cell 1 Connected HS-PDSCH Level (Sum) = -1 dBm
- HSDPA Cell 1 Connected HS-SCCH 1 to 4 Level = -20,-20,off,off
- Secondary Cell HSDPA Conn CPICH Level = -8
- Secondary Cell HSDPA Conn PCCPCH/SCH Level = -20
- Secondary Cell HSDPA Conn PICH Level = off
- Secondary Cell HSDPA Conn HS-PDSCHs Lvl (Sum) = -1 dBm
- Secondary Cell HSDPA Conn HS-SCCH 1 to 4 Level = -20,-20,off,off

TA Technology (Shanghai) Co., Ltd. Test Report

Table 10: HS-DSCH UE category

Table 5.1a: FDD HS-DSCH physical layer categories

HS-DSCH category	Maximum number of HS-DSCH codes received	Minimum inter-TTI interval	Maximum number of bits of an HS-DSCH transport block received within an HS-DSCH TTI NOTE 1	Total number of soft channel bits	Supported modulations without MIMO operation or dual cell operation	Supported modulations with MIMO operation and without dual cell operation	Supported modulations with dual cell operation
Category 1	5	3	7298	19200	QPSK, 16QAM	Not applicable (MIMO not supported)	Not applicable (dual cell operation not supported)
Category 2	5	3	7298	28800			
Category 3	5	2	7298	28800			
Category 4	5	2	7298	38400			
Category 5	5	1	7298	57600			
Category 6	5	1	7298	67200			
Category 7	10	1	14411	115200			
Category 8	10	1	14411	134400			
Category 9	15	1	20251	172800			
Category 10	15	1	27952	172800			
Category 11	5	2	3630	14400	QPSK		
Category 12	5	1	3630	28800	QPSK, 16QAM, 64QAM		
Category 13	15	1	35280	259200			
Category 14	15	1	42192	259200	QPSK, 16QAM		
Category 15	15	1	23370	345600	QPSK, 16QAM		
Category 16	15	1	27952	345600	QPSK, 16QAM		
Category 17 NOTE 2	15	1	35280	259200	QPSK, 16QAM, 64QAM	-	
			23370	345600	-	QPSK, 16QAM	
Category 18 NOTE 3	15	1	42192	259200	QPSK, 16QAM, 64QAM	-	
			27952	345600	-	QPSK, 16QAM	
Category 19	15	1	35280	518400	QPSK, 16QAM, 64QAM		
Category 20	15	1	42192	518400	QPSK, 16QAM, 64QAM		
Category 21	15	1	23370	345600			QPSK, 16QAM
Category 22	15	1	27952	345600			QPSK, 16QAM
Category 23	15	1	35280	518400			QPSK, 16QAM, 64QAM
Category 24	15	1	42192	518400			QPSK, 16QAM, 64QAM

6.2.4. HSUPA Test Configuration

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least ¼ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.⁴⁰

Due to inner loop power control requirements in HSPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA should be configured according to the β values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Devices’ sections of 3 G device.

TA Technology (Shanghai) Co., Ltd.

Test Report

Table 11: Sub-Test 5 Setup for Release 6 HSUPA

Sub-set	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-

DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the

signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the

signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Figure 5.1g.

Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Table 12: HSUPA UE category

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI (ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	11484	5.76
	4	4	10		20000	2.00
7 (No DPDCH)	4	8	2	2 SF2 & 2 SF4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4.

UE Categories 1 to 6 supports QPSK only. UE Category 7 supports QPSK and 16QAM. (TS25.306-7.3.0)

6.2.5. WIFI Test Configuration

For WLAN SAR testing, WLAN engineering testing software installed on the DUT can provide continuous transmitting RF signal. The Tx power is set to 15 for 802.11 b mode by software, This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

For the 802.11b/g/n SAR tests, a communication link is set up with the test mode software for WIFI mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate. Testing at higher data rates is not required when the maximum average output power is less than 0.25dB higher than those measured at the lowest data rate.

802.11b/g/n operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g/n modes are tested on the maximum average output channel;

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

6.3. Measurement Variability

Per FCC KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

6.4. Test Positions

6.4.1. Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”.

6.4.2. Body Configuration

The overall diagonal dimension of the display section of a tablet is 23 cm > 20 cm, Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. SAR evaluation for the front surface of tablet display screens are generally not necessary. The SAR Exclusion Threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

6.4.3. SAR test reduction and exclusion guidance

(1) The SAR exclusion threshold for distances <50mm is defined by the following equation:

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$

(2) The SAR exclusion threshold for distances >50mm is defined by the following equation, as illustrated in KDB 447498 D01 Appendix B:


a) at 100 MHz to 1500 MHz

$$[\text{Power allowed at numeric Threshold at 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot (f_{\text{(MHz)}}/150)] \text{ mW}$$

b) at > 1500 MHz and ≤ 6 GHz

$$[\text{Power allowed at numeric Threshold at 50 mm in step 1}) + (\text{test separation distance} - 50 \text{ mm}) \cdot 10] \text{ mW}$$

The location of the antennas inside EUT is shown in ANNEX H:

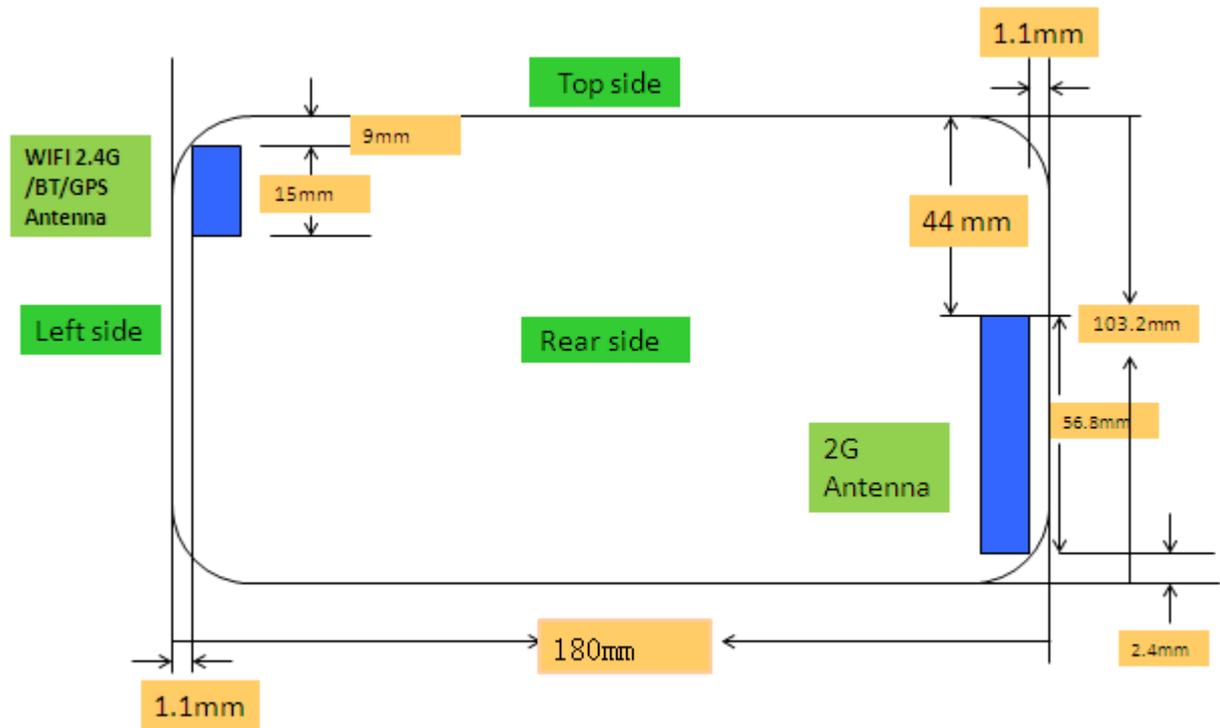

- Test Position 1: The back surface of the EUT towards to the bottom of the flat phantom. (ANNEX H Picture 13).

SAR is required for GSM/UMTS/WiFi antenna in this position.

SAR is not required for BT antenna in this position.

$$\text{Test Position 1 Evaluation}_{(GSM\ 850)} = [10^{((32-6.02)/10)/5}] * (0.8488^{1/2}) = 71.9 > 3.0$$

$$\text{Test Position 1 Evaluation}_{(GSM\ 1900)} = [10^{((29-6.02)/10)/5}] * (1.9098^{1/2}) = 54 > 3.0$$

$$\text{Test Position 1 Evaluation}_{(UMTS\ Band\ II)} = [10^{(24/10)/5}] * (1.9076^{1/2}) = 69.39 > 3.0$$

$$\text{Test Position 1 Evaluation}_{(UMTS\ Band\ V)} = [10^{(24/10)/5}] * (0.8466^{1/2}) = 46.22 > 3.0$$

$$\text{Test Position 1 Evaluation}_{(WiFi)} = [10^{(15/10)/5}] * (2.462^{1/2}) = 9.9 > 3.0$$

$$\text{Test Position 1 Evaluation}_{(BT)} = [10^{(1/10)/5}] * (2.480^{1/2}) = 0.40 < 3.0$$

- Test Position 2: The left edge of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 14).

SAR is required for WIFI antenna in this position.

SAR is not required for GSM/WCDMA/BT antenna in this position.

$$\text{Test Position 2 evaluation}_{(GSM\ 850)} = 164 + (178.9-50) * (848.8/150) = 893.4\text{mW} = 29.51\text{ dBm} > (32-6.02)\text{ dBm} = 25.98\text{ dBm (max.power)}$$

$$\text{Test Position 2 evaluation}_{(GSM\ 1900)} = 109 + (178.9-50) * 10 = 1398\text{mW} = 31.45\text{ dBm} > (29-6.02)\text{ dBm} = 22.98\text{ dBm (max.power)}$$

$$\text{Test Position 2 evaluation}_{(UMTS\ Band\ II)} = 109 + (178.9-50) * 10 = 1398\text{mW} = 31.45\text{ dBm} > 24\text{ dBm (max.power)}$$

$$\text{Test Position 2 evaluation}_{(UMTS\ Band\ V)} = 164 + (178.9-50) * (846.6/150) = 891.51\text{mW} = 29.50\text{ dBm} > 24\text{ dBm (max.power)}$$

$$\text{Test Position 2 Evaluation}_{(WiFi)} = [10^{(15/10)/5}] * (2.462^{1/2}) = 9.9 > 3.0$$

$$\text{Test Position 2 Evaluation}_{(BT)} = [10^{(1/10)/5}] * (2.480^{1/2}) = 0.40 < 3.0$$

TA Technology (Shanghai) Co., Ltd.

Test Report

- Test Position 3: The right edge of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 15).
SAR is required for GSM/WCDMA antenna in this position.
SAR is not required for BT/WIFI antenna in this position.
Test Position 3 Evaluation $_{(GSM\ 850)} = [10^{((32-6.02)/10)/5}] * (0.8488^{1/2}) = 71.9 > 3.0$
Test Position 3 Evaluation $_{(GSM\ 1900)} = [10^{((29-6.02)/10)/5}] * (1.9098^{1/2}) = 54 > 3.0$
Test Position 3 Evaluation $_{(UMTS\ Band\ II)} = [10^{(24/10)/5}] * (1.9076^{1/2}) = 69.4 > 3.0$
Test Position 3 Evaluation $_{(UMTS\ Band\ V)} = [10^{(24/10)/5}] * (0.8466^{1/2}) = 46.2 > 3.0$
Test Position 3 Evaluation $_{(WIFI)} = 96 + (178.9-50)*10 = 1385mW = 31.41\ dBm > 15\ dBm\ (max.power)$
Test Position 3 Evaluation $_{(BT)} = 96 + (178.9-50)*10 = 1385mW = 31.41\ dBm > 1\ dBm\ (max.power)$

- Test Position 4: The top edge of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 16).
SAR is required for GSM/WCDMA/WIFI antenna in this position.
SAR is not required for BT antenna in this position.
Test Position 4 Evaluation $_{(GSM\ 850)} = [10^{((32-6.02)/10)/44}] * (0.8488^{1/2}) = 8.2 > 3.0$
Test Position 4 Evaluation $_{(GSM\ 1900)} = [10^{((29-6.02)/10)/44}] * (1.9098^{1/2}) = 6.1 > 3.0$
Test Position 4 Evaluation $_{(UMTS\ Band\ II)} = [10^{(24/10)/44}] * (1.9076^{1/2}) = 7.9 > 3.0$
Test Position 4 Evaluation $_{(UMTS\ Band\ V)} = [10^{(24/10)/44}] * (0.8466^{1/2}) = 5.3 > 3.0$
Test Position 4 Evaluation $_{(WIFI)} = [10^{(15/10)/9}] * (2.462^{1/2}) = 5.5 > 3.0$
Test Position 4 Evaluation $_{(BT)} = [10^{(1/10)/9}] * (2.480^{1/2}) = 0.2 < 3.0$

- Test Position 5: The bottom edge of the EUT towards the bottom of the flat phantom. . (ANNEX H Picture 17).
SAR is required for GSM/WCDMA antenna in this position.
SAR is not required for BT/WIFI antenna in this position.
Test Position 5 Evaluation $_{(GSM\ 850)} = [10^{((32-6.02)/10)/5}] * (0.8488^{1/2}) = 71.9 > 3.0$
Test Position 5 Evaluation $_{(GSM\ 1900)} = [10^{((29-6.02)/10)/5}] * (1.9098^{1/2}) = 54 > 3.0$
Test Position 5 Evaluation $_{(UMTS\ Band\ II)} = [10^{(24/10)/5}] * (1.9076^{1/2}) = 69.4 > 3.0$
Test Position 5 Evaluation $_{(UMTS\ Band\ V)} = [10^{(24/10)/5}] * (0.8466^{1/2}) = 46.2 > 3.0$
Test Position 5 Evaluation $_{(WIFI)} = 96 + (79.2-50)*10 = 388mW = 25.89\ dBm > 15\ dBm\ (max.power)$
Test Position 5 Evaluation $_{(BT)} = 96 + (79.2-50)*10 = 388mW = 25.89\ dBm > 1\ dBm\ (max.power)$

TA Technology (Shanghai) Co., Ltd.
Test Report

7. Test Results

7.1. Conducted Power Results

Table 13: Conducted Power Measurement Results

GSM 850		Burst Conducted Power(dBm)			/	Average power(dBm)		
		Channel 128	Channel 190	Channel 251		Channel 128	Channel 190	Channel 251
GSM		32.91	32.74	32.62	-9.03dB	23.88	23.71	23.59
GPRS (GMSK)	1Txslot	29.69	29.71	29.64	-9.03dB	20.66	20.68	20.61
	2Txslots	30.58	30.74	30.61	-6.02dB	24.56	24.72	24.59
	3Txslots	28.52	28.69	28.73	-4.26dB	24.26	24.43	24.47
	4Txslots	26.23	26.57	26.59	-3.01dB	23.22	23.56	23.58
EGPRS (GMSK)	1Txslot	32.94	32.78	32.61	-9.03dB	23.91	23.75	23.58
	2Txslots	30.58	30.74	30.61	-6.02dB	24.56	24.72	24.59
	3Txslots	28.52	28.69	28.73	-4.26dB	24.26	24.43	24.47
	4Txslots	26.23	26.57	26.59	-3.01dB	23.22	23.56	23.58
EGPRS (8PSK)	1Txslot	26.61	26.91	27.22	-9.03dB	17.58	17.88	18.19
	2Txslots	24.47	27.51	24.49	-6.02dB	18.45	21.49	18.47
	3Txslots	22.46	22.47	22.45	-4.26dB	18.2	18.21	18.19
	4Txslots	20.27	20.18	20.18	-3.01dB	17.26	17.17	17.17
GSM 1900		Burst Conducted Power(dBm)			/	Average power(dBm)		
		Channel 512	Channel 661	Channel 810		Channel 512	Channel 661	Channel 810
GSM		29.69	29.71	29.64	-9.03dB	20.66	20.68	20.61
GPRS (GMSK)	1Txslot	29.59	29.6	29.61	-9.03dB	20.56	20.57	20.58
	2Txslots	28.41	28.45	28.42	-6.02dB	22.39	22.43	22.4
	3Txslots	25.36	25.4	25.29	-4.26dB	21.1	21.14	21.03
	4Txslots	23.39	23.41	23.29	-3.01dB	20.38	20.4	20.28
EGPRS (GMSK)	1Txslot	29.59	29.6	29.61	-9.03dB	20.56	20.57	20.58
	2Txslots	28.41	28.45	28.42	-6.02dB	22.39	22.43	22.4
	3Txslots	25.36	25.4	25.29	-4.26dB	21.1	21.14	21.03
	4Txslots	23.39	23.41	23.29	-3.01dB	20.38	20.4	20.28
EGPRS (8PSK)	1Txslot	25.55	25.47	25.48	-9.03dB	16.52	16.44	16.45
	2Txslots	23.39	23.24	23.26	-6.02dB	17.37	17.22	17.24
	3Txslots	21.59	21.37	21.06	-4.26dB	17.33	17.11	16.8
	4Txslots	19.56	19.25	19.04	-3.01dB	16.55	16.24	16.03

TA Technology (Shanghai) Co., Ltd.

Test Report

Note:

1) Division Factors

To average the power, the division factor is as follows:

- 1Txslot = 1 transmit time slot out of 8 time slots
=> conducted power divided by (8/1) => -9.03 dB
- 2Txslots = 2 transmit time slots out of 8 time slots
=> conducted power divided by (8/2) => -6.02 dB
- 3Txslots = 3 transmit time slots out of 8 time slots
=> conducted power divided by (8/3) => -4.26 dB
- 4Txslots = 4 transmit time slots out of 8 time slots
=> conducted power divided by (8/4) => -3.01 dB

2) Average power numbers

The maximum power numbers are marks in bold.

UMTS Band II		Conducted Power (dBm)		
		Channel 9262	Channel 9400	Channel 9538
RMC	12.2kbps RMC	23.33	23.34	23.29
	64kbps RMC	23.39	23.44	23.27
	144kbps RMC	23.27	23.29	23.20
	384kbps RMC	23.35	23.28	23.15
HSDPA	Sub - Test 1	23.41	23.44	23.37
	Sub - Test 2	23.13	22.32	23.09
	Sub - Test 3	22.22	23.35	22.23
	Sub - Test 4	22.21	23.32	22.22
HSUPA	Sub - Test 1	20.55	20.6	20.64
	Sub - Test 2	19.21	19.39	18.98
	Sub - Test 3	21.27	22.21	21.86
	Sub - Test 4	18.78	19.02	19.15
	Sub - Test 5	20.59	20.61	21.03
DC-HSDPA	Sub - Test 1	23.26	23.24	23.21
	Sub - Test 2	23.19	23.21	23.22
	Sub - Test 3	22.88	22.94	22.86
	Sub - Test 4	22.64	22.55	22.65
UMTS Band V		Conducted Power (dBm)		
		Channel 4132	Channel 4183	Channel 4233
RMC	12.2kbps RMC	23.26	23.37	23.31
	64kbps RMC	23.37	23.25	23.18

TA Technology (Shanghai) Co., Ltd.
Test Report

	144kbps RMC	23.33	23.36	23.24
	384kbps RMC	23.44	23.37	23.31
HSDPA	Sub - Test 1	23.35	23.38	23.55
	Sub - Test 2	23.05	23.01	22.22
	Sub - Test 3	22.5	22.51	22.48
	Sub - Test 4	22.49	23.54	22.45
HSUPA	Sub - Test 1	20.69	20.64	20.83
	Sub - Test 2	18.45	18.49	19.38
	Sub - Test 3	21.32	21.25	21.22
	Sub - Test 4	18.37	18.82	19.60
	Sub - Test 5	20.75	20.64	21.69
DC-HSDPA	Sub - Test 1	23.16	23.11	22.91
	Sub - Test 2	23.12	23.15	23.15
	Sub - Test 3	22.92	22.78	22.97
	Sub - Test 4	22.47	22.49	22.55

The average output power of BT antenna is as following:

Channel	Ch 0 2402 MHz	Ch 39 2441 MHz	Ch 78 2480 MHz
2450MHz	0.08	0.07	0.09

TA Technology (Shanghai) Co., Ltd. Test Report

The average output power of WIFI antenna is as following:
WIFI Antenna

Mode	Channel	Data rate (Mbps)	AV Power (dBm)
802.11b	1	1	14.88
		2	14.60
		5.5	14.53
		11	14.51
	6	1	14.93
		2	14.75
		5.5	14.71
		11	14.67
	11	1	14.81
		2	14.46
		5.5	14.68
		11	14.57
802.11g	1	6	11.75
		9	11.37
		12	11.26
		18	11.17
		24	11.54
		36	11.43
		48	11.45
		54	11.33
	6	6	11.86
		9	11.68
		12	11.67
		18	11.52
		24	11.39
		36	11.65
		48	11.56
		54	11.57
	11	6	11.93
		9	11.71
		12	11.61
		18	11.56
		24	11.38
		36	11.05
		48	11.69
		54	11.65
802.11n HT20	1	MCS0	11.74
		MCS1	11.26
		MCS2	11.05
		MCS3	11.69

TA Technology (Shanghai) Co., Ltd.

Test Report

		MCS4	11.65
		MCS5	11.33
		MCS6	11.22
		MCS7	11.06
	6	MCS0	11.94
		MCS1	11.64
		MCS2	11.68
		MCS3	11.61
		MCS4	11.63
		MCS5	11.68
		MCS6	11.71
		MCS7	11.72
	11	MCS0	11.81
		MCS1	11.67
		MCS2	11.33
		MCS3	11.27
		MCS4	11.58
		MCS5	11.46
		MCS6	11.34
MCS7		11.36	
802.11n HT40	3	MCS0	11.82
		MCS1	11.34
		MCS2	11.14
		MCS3	11.34
		MCS4	11.38
		MCS5	11.08
		MCS6	11.71
		MCS7	11.59
	6	MCS0	11.68
		MCS1	11.15
		MCS2	11.61
		MCS3	11.54
		MCS4	11.78
		MCS5	11.79
		MCS6	11.57
	9	MCS7	11.51
		MCS0	11.67
		MCS1	11.58
		MCS2	11.69
		MCS3	11.24
		MCS4	11.67
MCS5		11.48	
MCS6		11.35	
MCS7	11.21		

TA Technology (Shanghai) Co., Ltd.

Test Report

7.2. SAR Test Results

7.2.1. GSM 850 (GSM/GPRS/EGPRS)

Table 14: SAR Values [GSM/GSM 850 (GPRS/EGPRS)]

Test Position	Channel/ Frequency (MHz)	Time slot	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Head										
Left/Cheek	190/836.6	GSM	1:8.3	34	32.78	-0.07	0.095	1.32	0.126	Figure 12
Left/Tilt	190/836.6	GSM	1:8.3	34	32.78	0.02	0.102	1.32	0.135	Figure 13
Right/Cheek	190/836.6	GSM	1:8.3	34	32.78	0.058	0.169	1.32	0.224	Figure 14
Right/Tilt	190/836.6	GSM	1:8.3	34	32.78	0.03	0.148	1.32	0.196	Figure 15
Test Position of Body (Distance 0mm)										
Test Position 1	190/836.6	2Txslots	1:4.14	32	30.74	0.053	0.466	1.34	0.623	Figure 16
Test Position 2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Test Position 3	190/836.6	2Txslots	1:4.14	32	30.74	-0.100	0.399	1.34	0.533	Figure 17
Test Position 4	190/836.6	2Txslots	1:4.14	32	30.74	-0.16	0.019	1.34	0.097	Figure18
Test Position 5	190/836.6	2Txslots	1:4.14	32	30.74	-0.079	0.073	1.34	0.025	Figure19
Worst Case Position of Body with EGPRS(Distance 0mm)										
Test Position 1	190/836.6	2Txslots	1:4.14	32	30.74	-0.021	0.406	1.34	0.543	Figure20

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

3. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

4. When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.

5. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.

TA Technology (Shanghai) Co., Ltd.

Test Report

7.2.2. GSM 1900 (GSM/GPRS/EGPRS)

Table 15: SAR Values [GSM 1900 (GSM/GPRS/EGPRS)]

Test Position	Channel/Frequency (MHz)	Time slot	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift $\pm 0.21\text{dB}$		Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results	
Test Position of Head											
Left/Cheek	661/1880	GSM	1:8.3	31	29.71	-0.020	0.323	1.35	0.435	Figure 21	
Left/Tilt	661/1880	GSM	1:8.3	31	29.71	-0.030	0.256	1.35	0.345	Figure 22	
Right/Cheek	810/1909.8	GSM	1:8.3	31	29.64	-0.020	0.840	1.37	1.149	Figure 23	
	661/1880	GSM	1:8.3	31	29.71	0.150	0.842	1.35	1.133	Figure 24	
	512/1850.2	GSM	1:8.3	31	29.69	0.050	0.787	1.35	1.064	Figure 25	
Right/Tilt	810/1909.8	GSM	1:8.3	31	29.64	-0.050	0.716	1.37	0.979	Figure 26	
	661/1880	GSM	1:8.3	31	29.71	0.050	0.697	1.35	0.938	Figure 27	
	512/1850.2	GSM	1:8.3	31	29.69	0.010	0.668	1.35	0.903	Figure 28	
Test Position of Body (Distance 0mm)											
Test Position 1	810/1909.8	2Txslots	1:4.14	29	28.41	-0.047	1.220	1.15	1.398	Figure 29	
	661/1880	2Txslots	1:4.14	29	28.45	0.032	1.290	1.14	1.464	Figure 30	
	512/1850.2	2Txslots	1:4.14	29	28.42	0.137	1.180	1.14	1.349	Figure 31	
Test Position 2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
Test Position 3	810/1909.8	2Txslots	1:4.14	29	28.41	-0.050	1.250	1.15	1.432	Figure 32	
	661/1880	2Txslots	1:4.14	29	28.45	-0.080	1.250	1.14	1.419	Figure 33	
	512/1850.2	2Txslots	1:4.14	29	28.42	-0.130	1.190	1.14	1.360	Figure 34	
Test Position 4	661/1880	2Txslots	1:4.14	29	28.41	0.090	0.055	1.15	0.062	Figure 35	
Test Position 5	661/1880	2Txslots	1:4.14	29	28.45	-0.126	0.212	1.14	0.241	Figure 36	
Worst Test Position of Body with EGPRS(Distance 0mm)											
Test Position 1	661/1880	2Txslots	1:4.14	29	28.45	0.099	1.220	1.14	1.385	Figure 37	
Worst Test Position of Body with Earphone (Distance 0mm)											
Test Position 1	661/1880	2Txslots	1:8.3	30.5	29.71	0.095	0.891	1.20	1.069	Figure 38	
Worst Case Position of Body (1st Repeated SAR, Distance 0mm)											
Test Position 1	661/1880	2Txslots	1:4.14	29	28.45	-0.046	1.200	1.14	1.362	Figure 39	
<p>Note: 1. The value with blue color is the maximum SAR Value of each test band.</p> <p>2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).</p> <p>3. When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.</p> <p>4. When multiple slots are used, SAR should be tested to account for the maximum source-based time-averaged output power.</p>											

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 16: SAR Measurement Variability Results [GSM 1900 (GPRS/EGPRS)]

Test Position	Timeslots	Channel/ Frequency (MHz)	Measured SAR (1g)	1 st Repeated SAR (1g)	Ratio	2 nd Repeated SAR (1g)	3 rd Repeated SAR (1g)
Test Position 1	2Txslots	661/1880	1.290	1.200	1.08	NA	NA

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

TA Technology (Shanghai) Co., Ltd.

Test Report

7.2.3. UMTS Band II (WCDMA/HSDPA/HSUPA)

Table 17: SAR Values [UMTS Band II (WCDMA/HSDPA/HSUPA)]

Test Position	Channel/Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift	Limit SAR _{1g} 1.6 W/kg			
						± 0.21dB	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Head										
Left/Cheek	9400/1880	RMC 12.2K	1:1	24	23.34	-0.037	0.118	1.16	0.137	Figure 40
Left/Tilt	9400/1880	RMC 12.2K	1:1	24	23.34	-0.120	0.106	1.16	0.123	Figure 41
Right/Cheek	9400/1880	RMC 12.2K	1:1	24	23.34	0.130	0.356	1.16	0.414	Figure 42
Right/Tilt	9400/1880	RMC 12.2K	1:1	24	23.34	0.021	0.292	1.16	0.340	Figure 43
Test Position of Body (Distance 0mm)										
Test Position 1	9400/1880	RMC 12.2K	1:1	24	23.34	0.022	0.596	1.16	0.694	Figure 44
Test Position 2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Test Position 3	9400/1880	RMC 12.2K	1:1	24	23.34	-0.040	0.565	1.16	0.658	Figure 45
Test Position 4	9400/1880	RMC 12.2K	1:1	24	23.34	-0.023	0.028	1.16	0.033	Figure 46
Test Position 5	9400/1880	RMC 12.2K	1:1	24	23.34	0.098	0.099	1.16	0.115	Figure 47
<p>Note: 1. The value with blue color is the maximum SAR Value of each test band.</p> <p>2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).</p> <p>3. WCDMA mode was tested under RMC 12.2kbps with HSPA (HSDPA/HSUPA) inactive per KDB Publication 941225 D01. HSPA (HSDPA/HSUPA) SAR for body was not required since the average output power of the HSPA (HSDPA/HSUPA) subtests was not more than 0.25 dB higher than the RMC level or the maximum measured SAR for 12.2kbps RMC was less than 75% SAR limit.</p> <p>4. WCDMA mode was tested under RMC 12.2kbps with DC-HSDPA inactive per KDB Publication 941225 D02. DC-HSDPA SAR for body was not required since the average output power of the DC-HSDPA subtests was not more than 0.25 dB higher than the RMC level or the maximum reported SAR for 12.2kbps RMC was less than 75% SAR limit.</p> <p>5. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.</p>										

TA Technology (Shanghai) Co., Ltd.

Test Report

7.2.4. UMTS Band V (WCDMA/HSDPA/HSUPA)

Table 18: SAR Values [UMTS Band V (WCDMA/HSDPA/HSUPA)]

Test Position	Channel/Frequency (MHz)	Channel Type	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit SAR _{1g} 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Head										
Left/Cheek	4183/836.6	RMC 12.2K	1:1	24	23.37	-0.150	0.137	1.16	0.158	Figure 48
Left/Tilt	4183/836.6	RMC 12.2K	1:1	24	23.37	-0.010	0.139	1.16	0.161	Figure 49
Right/Cheek	4183/836.6	RMC 12.2K	1:1	24	23.37	0.010	0.255	1.16	0.295	Figure 50
Right/Tilt	4183/836.6	RMC 12.2K	1:1	24	23.37	-0.010	0.220	1.16	0.254	Figure 51
Test Position of Body (Distance 0mm)										
Test Position 1	4183/836.6	RMC 12.2K	1:1	24	23.37	0.030	0.666	1.16	0.770	Figure 52
Test Position 2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Test Position 3	4183/836.6	RMC 12.2K	1:1	24	23.37	0.040	0.563	1.16	0.651	Figure 53
Test Position 4	4183/836.6	RMC 12.2K	1:1	24	23.37	0.07	0.033	1.16	0.038	Figure 54
Test Position 5	4183/836.6	RMC 12.2K	1:1	24	23.37	0.110	0.087	1.16	0.101	Figure 55

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
3. WCDMA mode was tested under RMC 12.2kbps with HSPA (HSDPA/HSUPA) inactive per KDB Publication 941225 D01. HSPA (HSDPA/HSUPA) SAR for body was not required since the average output power of the HSPA (HSDPA/HSUPA) subtests was not more than 0.25 dB higher than the RMC level or the maximum measured SAR for 12.2kbps RMC was less than 75% SAR limit.
4. WCDMA mode was tested under RMC 12.2kbps with DC-HSDPA inactive per KDB Publication 941225 D02. DC-HSDPA SAR for body was not required since the average output power of the DC-HSDPA subtests was not more than 0.25 dB higher than the RMC level or the maximum reported SAR for 12.2kbps RMC was less than 75% SAR limit.
5. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.

TA Technology (Shanghai) Co., Ltd.

Test Report

7.2.5. WIFI (802.11b, WIFI)

Table 19: SAR Values (802.11b)

Test Position	Channel/Frequency (MHz)	Mode	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21 dB	Limit of SAR 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Head										
Left/Cheek	6/2437	DSSS	1:1	15	14.93	-0.115	0.013	1.02	0.013	Figure 56
Left/Tilt	6/2437	DSSS	1:1	15	14.93	-0.024	0.013	1.02	0.013	Figure 57
Right/Cheek	6/2437	DSSS	1:1	15	14.93	-0.160	0.017	1.02	0.017	Figure 58
Right/Tilt	6/2437	DSSS	1:1	15	14.93	0.040	0.010	1.02	0.010	Figure 59
Test Position of Body (0mm)										
Test Position 1	6/2437	DSSS	1:1	15	14.93	0.009	0.564	1.02	0.573	Figure 60
Test Position 2	6/2437	DSSS	1:1	15	14.93	-0.01	0.28	1.02	0.285	Figure 61
Test Position 3	6/2437	DSSS	1:1	15	14.93	-0.07	0.003	1.02	0.003	Figure 62
Test Position 4	6/2437	DSSS	1:1	15	14.93	0.029	0.22	1.02	0.224	Figure 63
Test Position 5	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
3. Per FCC KDB Publication 648474 D04, SAR was evaluated without a headset connected to the device. Since the reported SAR was ≤ 1.2 W/kg, no additional SAR evaluations using a headset cable were required.
4. For Test Position 3 where the estimated SAR is overly conservative for certain conditions, we choose to perform SAR measurements and use the measured SAR to determine simultaneous transmission SAR test exclusion.

TA Technology (Shanghai) Co., Ltd. Test Report

7.2.6. BT

Table 20: SAR Values (BT)

Test Position	Channel/Frequency (MHz)	Mode	Duty Cycle	Maximum Allowed Power (dBm)	Conducted Power (dBm)	Drift ± 0.21dB	Limit of SAR 1.6 W/kg			
						Drift (dB)	Measured SAR _{1g} (W/kg)	Scaling Factor	Reported SAR _{1g} (W/kg)	Graph Results
Test Position of Body (0mm)										
Test Position 3	78/2480	DSSS	1:1	1	0.09	-0.04	0.001	1.23	0.001	Figure 64
<p>Note: For conditions where the estimated SAR is overly conservative for certain conditions, the test lab may choose to perform standalone SAR measurements and use the measured SAR to determine simultaneous transmission SAR test exclusion.</p>										


TA Technology (Shanghai) Co., Ltd. Test Report

7.3. Simultaneous Transmission Conditions

Air-Interface	Band (MHz)	Type	Simultaneous Transmissions	Voice Over Digital Transport (Data)
GSM	850	VO	Yes WIFI or BT	NA
	1900	VO	Yes WIFI or BT	NA
	GPRS /EGPRS	DT	Yes WIFI or BT	NA
WCDMA	UMTS Band II	VO	Yes WIFI or BT	NA
	UMTS Band V	VO	Yes WIFI or BT	NA
	HSDPA/HSUPA/RMC/HSPA+ /DC-HSDPA	DT	Yes WIFI or BT	NA
WIFI	2450	DT	Yes GSM,GPRS,EGPRS, WCDMA/HSDPA/HSUPA/RM C/HSPA+/DC-HSDPA	Yes
Bluetooth (BT)	2400	DT	Yes GSM,GPRS,EGPRS, WCDMA/HSDPA/HSUPA/RM C/HSPA+/DC-HSDPA	NA

Note: VO Voice Service only
DT Digital Transport

The location of the antennas inside EUT is shown in ANNEX H:

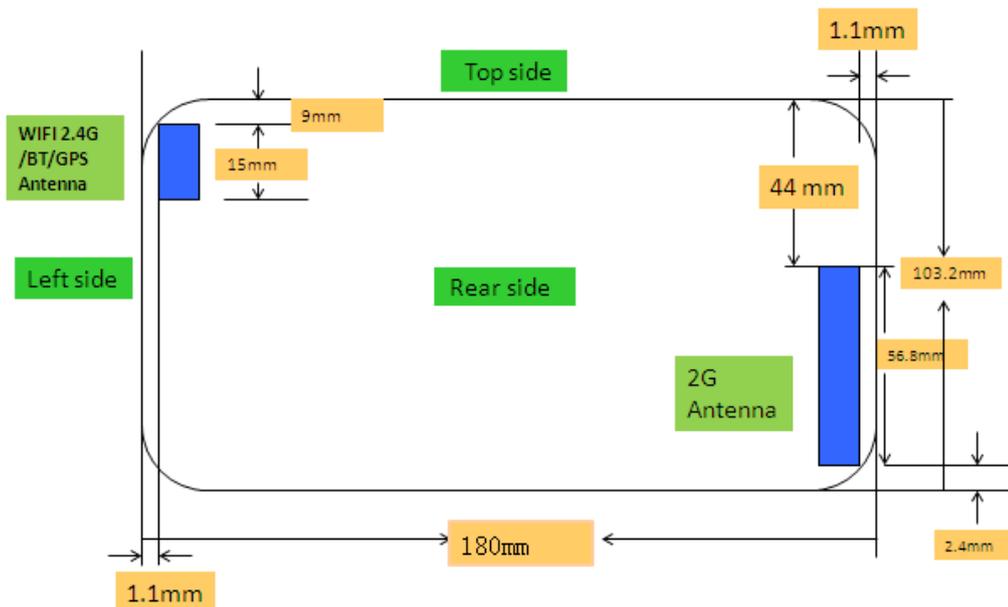

Estimated SAR

(1) for test separation distances ≤ 50 mm

When standalone SAR is not required to be measured per FCC KDB 447498 D01, the following equation must be used to estimate the standalone 1g SAR for simultaneous transmission assessment involving that transmitter for test separation distances ≤ 50 mm.

$$\text{Estimated SAR} = \frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} * \frac{\sqrt{f \text{ (GHz)}}}{7.5}$$

(2) for test separation distances >50 mm

0.4 W/kg for 1-g SAR

Head Estimated SAR_{Max.BT. Test Position 1} = $[10^{(1/10)}/5] * (2.48^{0.5}/7.5) = 0.053$ W/kg
 Head Estimated SAR_{Max.BT. Test Position 2} = $[10^{(1/10)}/5] * (2.48^{0.5}/7.5) = 0.053$ W/kg
 Head Estimated SAR_{Max.BT. Test Position 3} = $[10^{(1/10)}/5] * (2.48^{0.5}/7.5) = 0.053$ W/kg
 Head Estimated SAR_{Max.BT. Test Position 4} = $[10^{(1/10)}/5] * (2.48^{0.5}/7.5) = 0.053$ W/kg
 Head Estimated SAR_{Max.BT. Test Position 5} = $[10^{(1/10)}/5] * (2.48^{0.5}/7.5) = 0.053$ W/kg

Body Estimated SAR_{Max.BT. Test Position 1} = $[10^{(1/10)}/5] * (2.48^{0.5}/7.5) = 0.053$ W/kg
 Body Estimated SAR_{Max.BT. Test Position 2} = $[10^{(1/10)}/5] * (2.48^{0.5}/7.5) = 0.053$ W/kg
 Body Estimated SAR_{Max.BT. Test Position 4} = $[10^{(1/10)}/5] * (2.48^{0.5}/7.5) = 0.053$ W/kg
 Body Estimated SAR_{Max. BT. Test Position 5} ≤ 0.4 W/kg

Note:

For conditions where the estimated SAR is overly conservative for certain conditions, the test lab may choose to perform standalone SAR measurements and use the measured SAR to determine simultaneous transmission SAR test exclusion.

Per FCC KDB 447498 D01, simultaneous transmission SAR test exclusion may be applied when the sum of the 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. When the sum is greater than the SAR limit, SAR test exclusion is determined by the SAR to peak location separation ratio.

$$\text{Ratio} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{(\text{min. test separation distance, mm})} < 0.04$$

TA Technology (Shanghai) Co., Ltd.

Test Report

GSM/UMTS&WIFI Mode

Test Position \ Reported SAR _{1g} (W/kg)	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	WIFI	MAX. Σ SAR _{1g}	peak location separation ratio
Left hand, Touch cheek	0.126	0.435	0.137	0.158	0.013	0.448	No
Left hand, Tilt 15 Degree	0.135	0.345	0.123	0.161	0.013	0.358	No
Right hand, Touch cheek	0.224	1.149	0.414	0.295	0.017	1.166	No
Right hand, Tilt 15 Degree	0.196	0.979	0.340	0.254	0.010	0.989	No
Test Position 1	0.623	1.464	0.694	0.770	0.573	2.037	Yes
Test Position 2	0.4	0.4	0.4	0.4	0.224	0.624	No
Test Position 3	0.533	1.432	0.658	0.651	0.003	1.435	No
Test Position 4	0.025	0.062	0.033	0.038	0.285	0.347	No
Test Position 5	0.097	0.241	0.115	0.101	0.4	0.641	No

Note: 1.The value with blue color is the maximum ΣSAR_{1g} Value.
 2. MAX. ΣSAR_{1g} = Reported SAR_{Max.WIFI} + Reported SAR_{Max.GSM/UMTS}

MAX. ΣSAR_{1g} = 2.037W/kg > 1.6 W/kg, so the SAR to peak location separation ratio should be considered

Test Position \ Reported SAR _{1g} (W/kg)	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	WIFI	MAX. Σ SAR _{1g}
Test Position 1	0.623	/	/	/	0.573	1.196
	/	1.464	/	/	0.573	2.037
	/	/	0.694	/	0.573	1.267
	/	/	/	0.770	0.573	1.343


Note: 1.The value with red color is the SAR_{1g} >1.6 W/kg.
 2. when the MAX. Σ SAR_{1g} potio>1.6 W/kg in a position, simultaneous transmission conditions of other bands also need consideration in this position.

(SAR_{Max}=2.037W/Kg)

The position SAR_{GSM 1900} is (x₁= 31.5, y₁= 81, z₁= -178.6),

The position SAR_{Max.WIFI} is (x₂= -35.5, y₂=-84, z₂= -178.6)

so the distance between the SAR_{Max.GSM 1900} and SAR_{Max.WIFI} is 177.90mm.

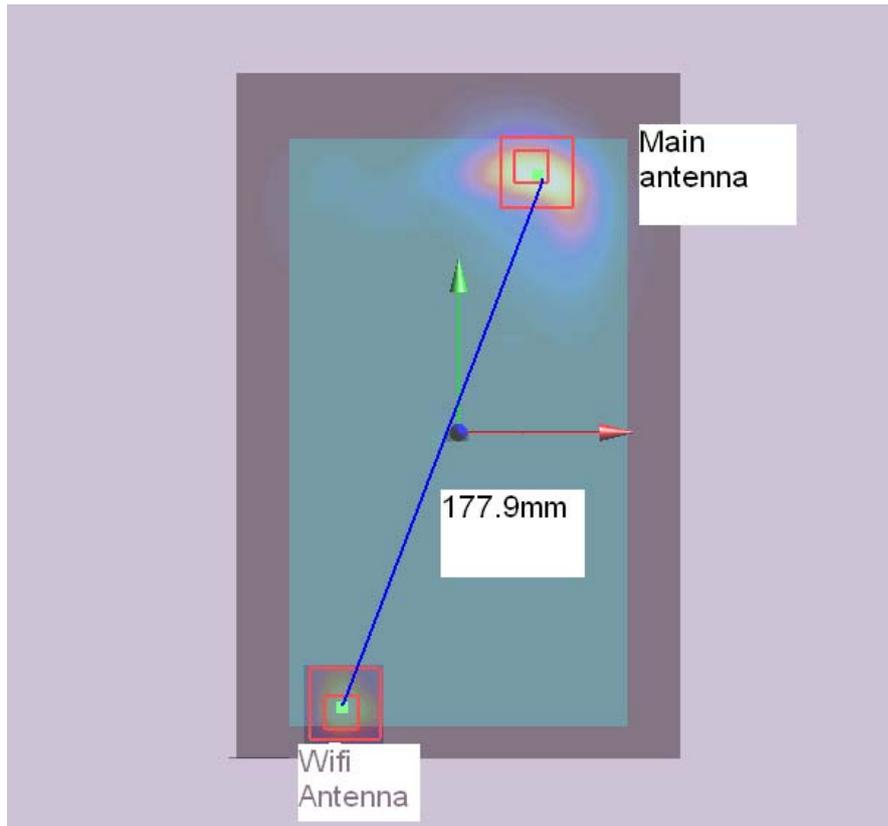

Ratio= $[(\text{Reported SAR}_{\text{Max.GSM/UMTS}}) 1.464\text{W/kg} + (\text{Reported SAR}_{\text{Max.WIFI}}) 0.573\text{W/kg}]^{3/2} / \text{Peak SAR}$
Location Separation = $2.037^{3/2} / 177.90 = 0.02 < 0.04$

So the Simultaneous SAR are not required for WIFI and GSM/UMTS antenna.

TA Technology (Shanghai) Co., Ltd.

Test Report

GSM/UMTS&BT Mode

Test Position \ Reported SAR _{1g} (W/kg)	GSM 850	GSM 1900	UMTS Band II	UMTS Band V	BT	MAX. Σ SAR _{1g}	peak location separation ratio
Left hand, Touch cheek	0.126	0.435	0.137	0.158	0.053	0.488	No
Left hand, Tilt 15 Degree	0.135	0.345	0.123	0.161	0.053	0.398	No
Right hand, Touch cheek	0.224	1.149	0.414	0.295	0.053	1.202	No
Right hand, Tilt 15 Degree	0.196	0.979	0.340	0.254	0.053	1.032	No
Test Position 1	0.623	1.464	0.694	0.770	0.053	1.517	No
Test Position 2	0.4	0.4	0.4	0.4	0.053	0.453	No
Test Position 3	0.533	1.432	0.658	0.651	0.001	1.433	No
Test Position 4	0.025	0.062	0.033	0.038	0.4	0.462	No
Test Position 5	0.097	0.241	0.115	0.101	0.053	0.053	No
Note: 1.The value with blue color is the maximum ΣSAR _{1g} Value. 2. MAX. ΣSAR _{1g} = Reported SAR _{Max.WIFI} + Reported SAR _{Max.GSM/UMTS}							

MAX. ΣSAR_{1g} = 1.517W/kg < 1.6 W/kg, so the Simultaneous SAR are not required for BT and GSM/UMTS antenna.

WIFI antenna and BT antenna cannot transmit simultaneously.

8. Measurement Uncertainty

The measured SAR were <1.5 W/kg for all frequency bands, therefore per KDB Publication 865664 D01v01r03, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports

*****END OF REPORT *****

TA Technology (Shanghai) Co., Ltd.
Test Report

9. Main Test Instruments

Table 21: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 10, 2013	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 9, 2014	One year
04	Power sensor	Agilent N8481H	MY50350004	September 23, 2013	One year
05	Power sensor	E9327A	US40441622	January 1, 2014	One year
06	Signal Generator	HP 8341B	2730A00804	September 9, 2013	One year
07	Dual directional coupler	778D-012	50519	March 25, 2013	One year
08	Dual directional coupler	777D	50146	March 25, 2013	One year
09	Amplifier	IXA-020	0401	No Calibration Requested	
10	BTS	E5515C	MY48360988	November 26, 2013	One year
11	E-field Probe	EX3DV4	3677	November 28, 2013	One year
12	DAE	DAE4	1317	January 16, 2014	One year
13	Validation Kit 835MHz	D835V2	4d020	August 26, 2011	Three years
14	Validation Kit 1900MHz	D1900V2	5d060	August 31, 2011	Three years
15	Validation Kit 2450MHz	D2450V2	786	August 29, 2011	Three years
16	Temperature Probe	JM222	AA1009129	March 12, 2014	One year
17	Hygrothermograph	WS-1	64591	September 26, 2013	One year

***END OF REPORT ***


ANNEX A: Test Layout



Picture 1: Specific Absorption Rate Test Layout



Picture 2: Liquid depth in the Flat Phantom (835 MHz, 15.4cm depth)

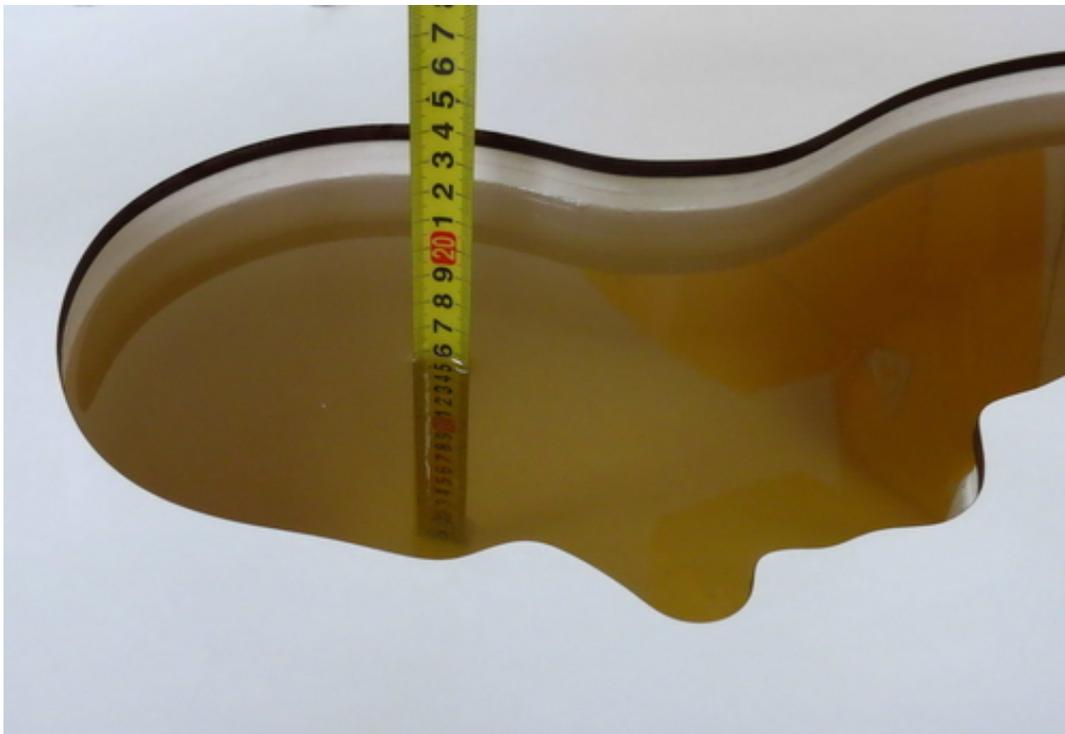

Picture 3: Liquid depth in the head Phantom (835MHz, 15.3cm depth)



Picture 4: Liquid depth in the Flat Phantom (1900 MHz, 15.1cm depth)



Picture 5: liquid depth in the head Phantom (1900 MHz, 15.3cm depth)



Picture 6: Liquid depth in the Flat Phantom (2450 MHz, 15.3cm depth)



Picture 7: Liquid depth in the head Phantom (2450 MHz, 15.4cm depth)

ANNEX B: System Check Results

System Performance Check at 835 MHz Head TSL

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d020

Date/Time: 3/15/2014 2:45:17 AM

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: EX3DV4 – SN3677; ConvF(9.41, 9.41, 9.41); Calibrated: 11/28/2013;

Electronics: DAE4 Sn1317; Calibrated: 1/16/2014

Phantom: SAM1; Type: SAM; Serial: TP-1534

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

d=15mm, Pin=250mW/Area Scan (41x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.64 mW/g

d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 54.4 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.44 mW/g; SAR(10 g) = 1.6 mW/g

Maximum value of SAR (measured) = 2.64 mW/g

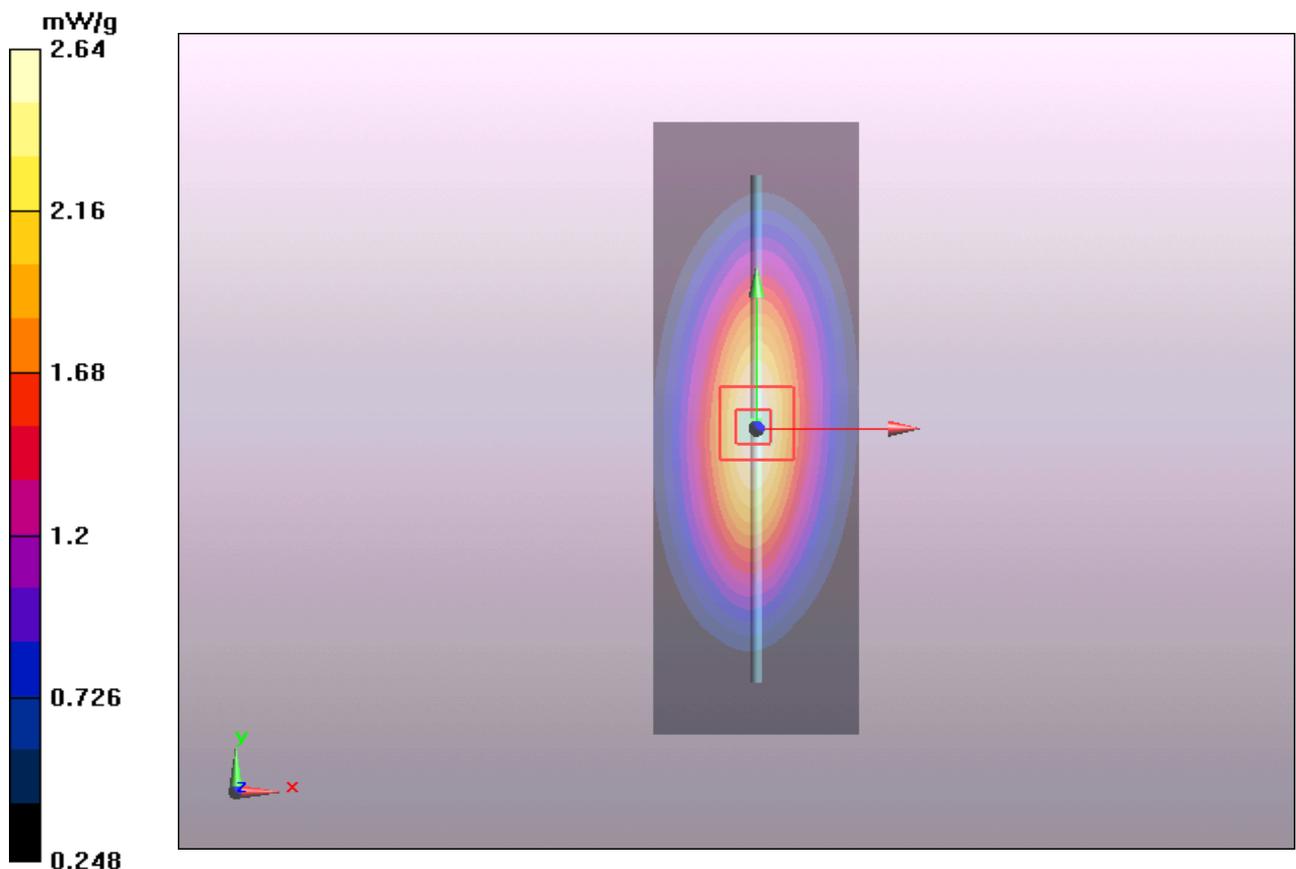


Figure 6 System Performance Check 835MHz 250mW