



**FCC PART 15C
TEST REPORT
No. I15N00284-WLAN**

for

Huawei Technologies Co., Ltd

Smart Phone

Model Name: HUAWEI ALE-L02, ALE-L02

With

Hardware Version: HL3ALICEM

Software Version: ALE-L02 V100R001C900B045

FCC ID: QISALE-L02

Issued Date: Apr 20th, 2015

Test Laboratory:

FCC 2.948 Listed: No.342690

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633Email:cttl@chinattl.com, website:www.chinattl.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I15N00284-WLAN	Rev.0	1st edition	2015-04-20

CONTENTS

1. TEST LABORATORY	8
1.1. TESTING LOCATION	8
1.2. TESTING ENVIRONMENT.....	8
1.3. PROJECT DATA	8
1.4. SIGNATURE.....	8
2. CLIENT INFORMATION.....	9
2.1. APPLICANT INFORMATION.....	9
2.2. MANUFACTURER INFORMATION	9
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
3.1. ABOUT EUT	10
3.2. INTERNAL IDENTIFICATION OF EUT	10
3.3. INTERNAL IDENTIFICATION OF AE.....	10
4. REFERENCE DOCUMENTS.....	11
4.1. DOCUMENTS SUPPLIED BY APPLICANT	11
4.2. REFERENCE DOCUMENTS FOR TESTING.....	11
5. TEST RESULTS	12
5.1. SUMMARY OF TEST RESULTS.....	12
5.2. STATEMENTS.....	12
5.3. TERMS USED IN THE RESULT TABLE	12
5.4. LABORATORY ENVIRONMENT.....	13
6. TEST FACILITIES UTILIZED.....	14
ANNEX A: EUT PHOTOGRAPH	15
ANNEX B: MEASUREMENT RESULTS FOR RECEIVER	19
B.0 ANTENNA REQUIREMENT	19
B.1 MAXIMUM AVERAGE OUTPUT POWER.....	20
B.2 PEAK POWER SPECTRAL DENSITY.....	22
B.3 OCCUPIED 6DB BANDWIDTH.....	23
B.4 BAND EDGES COMPLIANCE	24
B.5 TRANSMITTER SPURIOUS EMISSION.....	25
B.5.1 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	25
B.5.2 TRANSMITTER SPURIOUS EMISSION - RADIATED	27
B.6 AC POWERLINE CONDUCTED EMISSION	36
ANNEX C: TEST LAYOUTS.....	40
FIG.1 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,1MBPS)	40
FIG.2 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,1MBPS)	40
FIG.3 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,1MBPS).....	41

FIG.4	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,2MBPS)	41
FIG.5	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,2MBPS)	42
FIG.6	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,2MBPS)	42
FIG.7	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,5.5MBPS)	43
FIG.8	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,5.5MBPS)	43
FIG.9	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,5.5MBPS)	44
FIG.10	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1,11MBPS)	44
FIG.11	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6,11MBPS)	45
FIG.12	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11,11MBPS)	45
FIG.13	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,6MBPS)	46
FIG.14	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,6MBPS)	46
FIG.15	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,6MBPS)	47
FIG.16	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,9MBPS)	47
FIG.17	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,9MBPS)	48
FIG.18	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,9MBPS)	48
FIG.19	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,12MBPS)	49
FIG.20	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,12MBPS)	49
FIG.21	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,12MBPS)	50
FIG.22	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,18MBPS)	50
FIG.23	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,18MBPS)	51
FIG.24	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,18MBPS)	51
FIG.25	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,24MBPS)	52
FIG.26	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,24MBPS)	52
FIG.27	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,24MBPS)	53
FIG.28	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,36MBPS)	53
FIG.29	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,36MBPS)	54
FIG.30	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,36MBPS)	54
FIG.31	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,48MBPS)	55
FIG.32	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,48MBPS)	55
FIG.33	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,48MBPS)	56
FIG.34	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1,54MBPS)	56
FIG.35	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6,54MBPS)	57
FIG.36	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11,54MBPS)	57
FIG.37	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS0)	58
FIG.38	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS0)	58
FIG.39	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS0)	59
FIG.40	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS1)	59
FIG.41	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS1)	60
FIG.42	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS1)	60
FIG.43	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS2)	61
FIG.44	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS2))	61
FIG.45	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS2)	62
FIG.46	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS3)	62
FIG.47	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS3)	63

FIG.48	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS3).....	63
FIG.49	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS4)	64
FIG.50	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS4)	64
FIG.51	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS4).....	65
FIG.52	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS5)	65
FIG.53	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS5)	66
FIG.54	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS5).....	66
FIG.55	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS6)	67
FIG.56	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS6)	67
FIG.57	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS6).....	68
FIG.58	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 1,MCS7)	68
FIG.59	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 6,MCS7)	69
FIG.60	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHZ, CH 11,MCS7).....	69
FIG.61	POWER SPECTRAL DENSITY (802.11B, CH 1).....	70
FIG.62	POWER SPECTRAL DENSITY (802.11B, CH 6).....	70
FIG.63	POWER SPECTRAL DENSITY (802.11B, CH 11).....	71
FIG.64	POWER SPECTRAL DENSITY (802.11G, CH 1).....	71
FIG.65	POWER SPECTRAL DENSITY (802.11G, CH 6).....	72
FIG.66	POWER SPECTRAL DENSITY (802.11G, CH 11).....	72
FIG.67	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 1).....	73
FIG.68	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 6).....	73
FIG.69	POWER SPECTRAL DENSITY (802.11N-20MHZ, CH 11).....	74
FIG.70	OCCUPIED 6DB BANDWIDTH (802.11B, CH 1).....	74
FIG.71	OCCUPIED 6DB BANDWIDTH (802.11B, CH 6).....	75
FIG.72	OCCUPIED 6DB BANDWIDTH (802.11B, CH 11).....	75
FIG.73	OCCUPIED 6DB BANDWIDTH (802.11G, CH 1).....	76
FIG.74	OCCUPIED 6DB BANDWIDTH (802.11G, CH 6).....	76
FIG.75	OCCUPIED 6DB BANDWIDTH (802.11G, CH 11).....	77
FIG.76	OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 1).....	77
FIG.77	OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 6).....	78
FIG.78	OCCUPIED 6DB BANDWIDTH (802.11 N-20MHZ, CH 11).....	78
FIG.79	BAND EDGES (802.11B, CH 1).....	79
FIG.80	BAND EDGES (802.11B, CH 11).....	79
FIG.81	BAND EDGES (802.11G, CH 1).....	80
FIG.82	BAND EDGES (802.11G, CH 11).....	80
FIG.83	BAND EDGES (802.11 N-20MHZ, CH 1).....	81
FIG.84	BAND EDGES (802.11 N-20MHZ, CH 11).....	81
FIG.85	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY)	82
FIG.86	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHZ-3 GHZ).....	82
FIG.87	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 3 GHZ-18 GHZ)	83
FIG.88	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY)	83
FIG.89	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHZ-3 GHZ).....	84
FIG.90	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 3 GHZ-18 GHZ)	84
FIG.91	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY)	85

FIG.92	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-3 GHz).....	85
FIG.93	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 3 GHz-18 GHz).....	86
FIG.94	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY)	86
FIG.95	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-3 GHz)	87
FIG.96	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 3 GHz-18 GHz).....	87
FIG.97	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY)	88
FIG.98	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-3 GHz)	88
FIG.99	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 3 GHz-18 GHz).....	89
FIG.100	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY).....	89
FIG.101	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-3 GHz)	90
FIG.102	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 3 GHz-18 GHz).....	90
FIG.103	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, CENTER FREQUENCY)	91
FIG.104	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, 30 MHz-3 GHz).....	91
FIG.105	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH1, 3 GHz-18 GHz)	92
FIG.106	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, CENTER FREQUENCY)	92
FIG.107	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, 30 MHz-3 GHz).....	93
FIG.108	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH6, 3 GHz-18 GHz)	93
FIG.109	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, CENTER FREQUENCY)	94
FIG.110	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, 30 MHz-3 GHz).....	94
FIG.111	CONDUCTED SPURIOUS EMISSION (802.11N-20M, CH11, 3 GHz-18 GHz).....	95
FIG.112	CONDUCTED SPURIOUS EMISSION (ALL CHANNELS, 18 GHz-26 GHz).....	95
FIG.113	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE1)	96
FIG.114	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE2)	96
FIG.115	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE3)	97
FIG.116	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE4)	97
FIG.117	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE5)	98
FIG.118	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz,AE6)	98
FIG.119	RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-3GHz)	99
FIG.120	RADIATED SPURIOUS EMISSION (802.11B, CH1, 3 GHz-18 GHz)	99
FIG.121	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-3GHz)	100
FIG.122	RADIATED SPURIOUS EMISSION (802.11B, CH1, 3 GHz-18 GHz)	100
FIG.123	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-3GHz)	101
FIG.124	RADIATED SPURIOUS EMISSION (802.11B, CH11, 3 GHz-18 GHz)	101
FIG.125	RADIATED EMISSION POWER (802.11B, CH1, 2380GHz~2450GHz)	102
FIG.126	RADIATED EMISSION POWER (802.11B, CH11, 2450GHz~2500GHz).....	102
FIG.127	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-3 GHz)	103
FIG.128	RADIATED SPURIOUS EMISSION (802.11G, CH1, 3 GHz-18 GHz)	103
FIG.129	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30MHz-1 GHz).....	104
FIG.130	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-3 GHz)	104
FIG.131	RADIATED SPURIOUS EMISSION (802.11G, CH6, 3 GHz-18 GHz)	105
FIG.132	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-3 GHz).....	105
FIG.133	RADIATED SPURIOUS EMISSION (802.11G, CH11, 3 GHz-18 GHz).....	106
FIG.134	RADIATED EMISSION POWER (802.11G, CH1, 2380GHz~2450GHz).....	106
FIG.135	RADIATED EMISSION POWER (802.11G, CH11, 2450GHz~2500GHz).....	107

FIG.136	RADIATED SPURIOUS EMISSION (802.11N-20M, CH1, 1 GHz-3 GHz)	107
FIG.137	RADIATED SPURIOUS EMISSION (802.11N-20M, CH1, 3 GHz-18 GHz)	108
FIG.138	RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 30MHz-1 GHz)	108
FIG.139	RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 1 GHz-3 GHz)	109
FIG.140	RADIATED SPURIOUS EMISSION (802.11N-20M, CH6, 3 GHz-18 GHz)	109
FIG.141	RADIATED SPURIOUS EMISSION (802.11N-20M, CH11, 1 GHz-3 GHz)	110
FIG.142	RADIATED SPURIOUS EMISSION (802.11N-20M, CH11, 3 GHz-18 GHz)	110
FIG.143	RADIATED EMISSION POWER (802.11N-20M, CH1, 2380GHz~2450GHz)	111
FIG.144	RADIATED EMISSION POWER (802.11N-20M, CH11, 2450GHz~2500GHz).....	111
FIG.145	RADIATED EMISSION: 18 GHz – 26.5 GHz	112
FIG.146	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE1)	113
FIG.147	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE2)	114
FIG.148	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE3)	115
FIG.149	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE4)	116
FIG.150	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE5)	117
FIG.151	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE6)	118
FIG.152	AC POWERLINE CONDUCTED EMISSION (IDLE, AE1)	119
ANNEX D: PERSONS INVOLVED IN THIS TESTING		120



1. Test Laboratory

1.1. Testing Location

Location1: CTTL(South Branch)

Address: No.12, ShangSha Innovation and Technology Park, Futian District,
Shenzhen, Guangdong, P. R. China 518048

Location2: CTTL(huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R.
China100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Extreme Temperature: -20/+55°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2015-03-09

Testing End Date: 2015-03-25

1.4. Signature

Xu Ye

(Prepared this test report)

Tang Weisheng

(Reviewed this test report)

Zhang Bojun

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
City: Shenzhen
Postal Code: /
Country: China
Telephone: 029-89282965
Fax: /

2.2. Manufacturer Information

Company Name: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co.,
Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
City: Shenzhen
Postal Code: /
Country: China
Telephone: 029-89282965
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Smart Phone
Model Name	HUAWEI ALE-L02, ALE-L02
Market Name	/
RF Protocol	IEEE 802.11b/g/n20
Operating Frequency	2412MHz~2462MHz
FCC ID	QISALE-L02

*Note: Photographs of EUT are shown in ANNEX A of this test report.

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version
EUT1	/	HL3ALICEM	ALE-L02 V100R001C900B045

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	Type	SN
AE1	Charger	HW-050100U01_yingju	/
AE2	Charger	HW-050100U01_BYD	/
AE3	Charger	HW-050100U2W_BYD	/
AE4	Charger	HW-050100U2W_hangjia	/
AE5	Charger	HW-050100B01_hangjia	/
AE6	Charger	HW-050100B01_dahong	/

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz.	Oct, 2014
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009
KDB558074	Measurement of Digital Transmission Systems Operating under Section 15.247	Jun, 2014

5. Test Results

5.1. Summary of Test Results

No	Test cases	Standard Sub-clause	Verdict
0	Antenna Requirement	15.203	P
1	Maximum Peak Output Power	15.247 (b)	P
2	Peak Power Spectral Density	15.247 (e)	P
3	Occupied 6dB Bandwidth	15.247 (a)	P
4	Band Edges Compliance	15.247 (d)	P
5	Transmitter Spurious Emission - Conducted	15.247 (d)	P
6	Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	P
7	AC Powerline Conducted Emission	15.107, 15.207	P

See **ANNEX B** and **ANNEX C** for details.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2

The hardware of HUAWEI ALE-L02 and HUAWEI ALE-L23 are the same. The test bases on the model HUAWEI ALE-L23.

5.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropical radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

5.4. Laboratory Environment

Semi-anechoic chamber (23 meters×17 meters×10 meters) did not exceed following limits:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M
Ground system resistance	< 4
Normalised site attenuation (NSA)	< ±4dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M
Ground system resistance	< 4

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2015-04-22	1 year


Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Chamber	FACT10-3	SAC-1	ETS-Lindgren	2016-03-27	3 years
2	Test Receiver	ESU26	100235	Rohde & Schwarz	2016-03-02	1 year
3	Test Receiver	ESCI 7	100948	Rohde & Schwarz	2015-07-16	1 year
4	LISN	ESH2-Z5	100196	Rohde & Schwarz	2016-01-13	1 year
5	Loop Antenna	HFH2-Z2	829324/007	Rohde & Schwarz	2017-12-16	3 years
6	EMI Antenna	VULB9163	9163-234	Schwarzbeck	2016-09-15	3 years
7	EMI Antenna	3115	6914	ETS-Lindgren	2017-12-15	3 years
8	EMI Antenna	3116	2661	ETS-Lindgren	2017-06-17	3 years


Anechoic chamber

Fully anechoic chamber by ETS-Lindgren.

ANNEX A: EUT photograph

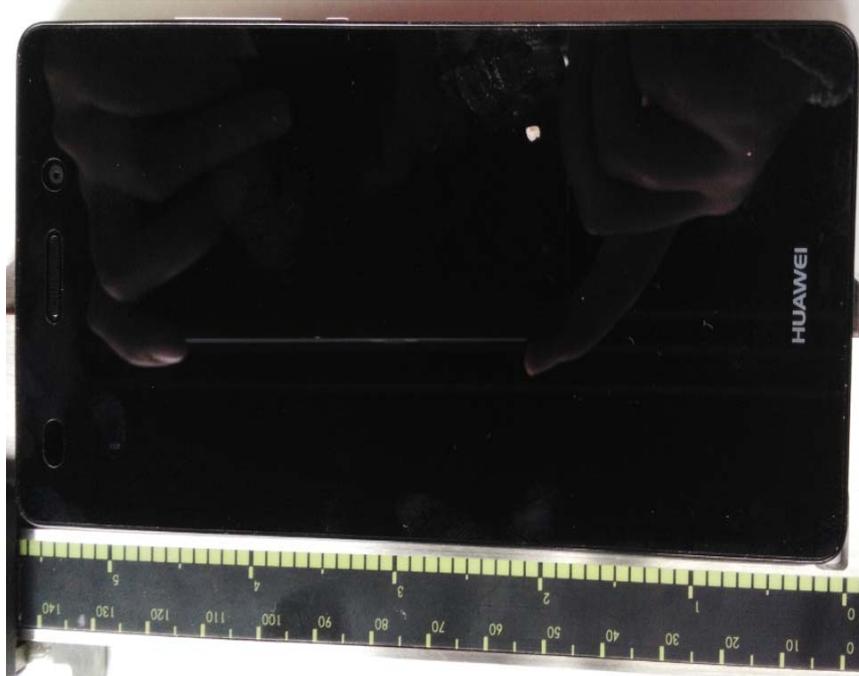

Picture A-1: Mobile Phone

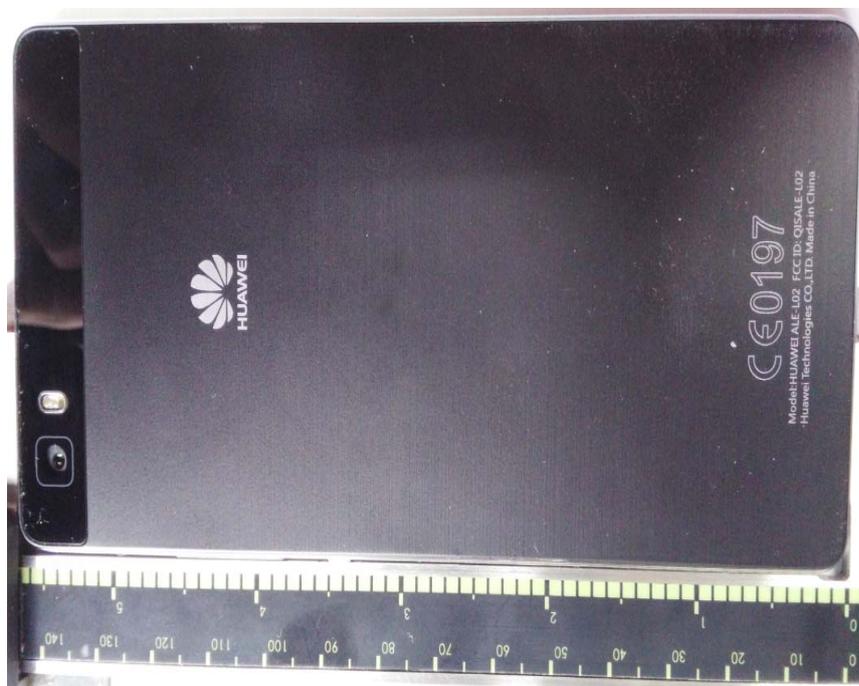

Picture A-2: Mobile Phone



Picture A-3: Charger(AE1)



Picture A-4: Charger(AE2)



Picture A-5: Charger(AE3)



Picture A-6: Charger(AE4)



Picture A-7: Charger(AE5)



Picture A-8: Charger(AE6)

ANNEX B: MEASUREMENT RESULTS FOR RECEIVER

B.0 Antenna requirement

Measurement Limit:

Standard	Requirement
<p>FCC CRF Part 15.203</p>	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, § 15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>

Conclusion: The Directional gains of antenna used for transmitting is -2.0 dBi.

The RF transmitter uses an integrate antenna without connector.

B.1 Maximum Average Output Power

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)(1)	< 30

Measurement Results:

802.11b/g mode

Mode	Data Rate (Mbps)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11b	1	Fig.1	17.98	Fig.2	17.65	Fig.3	17.08
	2	Fig.4	17.90	Fig.5	17.71	Fig.6	16.78
	5.5	Fig.7	17.77	Fig.8	17.65	Fig.9	16.22
	11	Fig.10	18.97	Fig.11	18.47	Fig.12	17.08
802.11g	6	Fig.13	19.33	Fig.14	18.50	Fig.15	18.26
	9	Fig.16	19.35	Fig.17	18.43	Fig.18	17.95
	12	Fig.19	19.91	Fig.20	18.40	Fig.21	18.51
	18	Fig.22	19.61	Fig.23	18.38	Fig.24	18.79
	24	Fig.25	19.45	Fig.26	18.36	Fig.27	18.91
	36	Fig.28	19.02	Fig.29	18.34	Fig.30	18.16
	48	Fig.31	17.33	Fig.32	16.71	Fig.33	16.51
	54	Fig.34	16.37	Fig.35	16.37	Fig.36	15.68

802.11n mode

Mode	Data Rate (MCS Index)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11n (20MHz)	MCS0	Fig.37	16.70	Fig.38	16.18	Fig.39	15.36
	MCS1	Fig.40	16.65	Fig.41	16.20	Fig.42	15.84
	MCS2	Fig.43	16.67	Fig.44	16.25	Fig.45	15.88
	MCS3	Fig.46	16.67	Fig.47	16.23	Fig.48	15.83
	MCS4	Fig.49	16.62	Fig.50	16.10	Fig.51	15.86
	MCS5	Fig.52	16.67	Fig.53	16.10	Fig.54	15.90
	MCS6	Fig.55	16.66	Fig.56	16.14	Fig.57	15.91
	MCS7	Fig.58	16.67	Fig.59	16.16	Fig.60	15.87

See ANNEX C for test graphs.

Conclusion: PASS

B.2 Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(d)	< 8 dBm/3 kHz

Measurement Results:

802.11b/g mode

Mode	Channel	Peak Power Spectral Density (dBm)		Conclusion
802.11b	1	Fig.61	-4.45	P
	6	Fig.62	-3.90	P
	11	Fig.63	-5.28	P
802.11g	1	Fig.64	-5.81	P
	6	Fig.65	-6.71	P
	11	Fig.66	-6.95	P

802.11n mode

Mode	Channel	Peak Power Spectral Density(dBm)		Conclusion
802.11n (20MHz)	1	Fig.67	-6.91	P
	6	Fig.68	-6.76	P
	11	Fig.69	-7.07	P

See ANNEX C for test graphs.

Conclusion: PASS

B.3 Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results (kHz)		conclusion
802.11b	1	Fig.70	7554	P
	6	Fig.71	7120	P
	11	Fig.72	7164	P
802.11g	1	Fig.73	15803	P
	6	Fig.74	16020	P
	11	Fig.75	15760	P

802.11n mode

Mode	Channel	Test Results (kHz)		conclusion
802.11n (20MHz)	1	Fig.76	16454	P
	6	Fig.77	16324	P
	11	Fig.78	16151	P

See ANNEX C for test graphs.

Conclusion: PASS

B.4 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.79	P
	11	Fig.80	P
802.11g	1	Fig.81	P
	11	Fig.82	P

802.11n mode

Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.83	P
	11	Fig.84	P

See ANNEX C for test graphs.

Conclusion: PASS

B.5 Transmitter Spurious Emission

B.5.1 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.85	P
		30 MHz-3 GHz	Fig.86	P
		3GHz-18GHz	Fig.87	P
	6	2.437 GHz	Fig.88	P
		30 MHz-3 GHz	Fig.89	P
		3GHz-18GHz	Fig.90	P
	11	2.462 GHz	Fig.91	P
		30 MHz-3 GHz	Fig.92	P
		3GHz-18GHz	Fig.93	P
802.11g	1	2.412 GHz	Fig.94	P
		30 MHz-3 GHz	Fig.95	P
		3GHz-18GHz	Fig.96	P
	6	2.437 GHz	Fig.97	P
		30 MHz-3 GHz	Fig.98	P
		3GHz-18GHz	Fig.99	P
	11	2.462 GHz	Fig.100	P
		30 MHz-3 GHz	Fig.101	P
		3GHz-18GHz	Fig.102	P

802.11n mode

802.11n (20MHz)	1	2.412 GHz	Fig.103	P
		30 MHz-3 GHz	Fig.104	P
		3GHz-18GHz	Fig.105	P
	6	2.437 GHz	Fig.106	P
		30 MHz-3 GHz	Fig.107	P
		3GHz-18GHz	Fig.108	P
	11	2.462 GHz	Fig.109	P
		30 MHz-3 GHz	Fig.110	P
		3GHz-18GHz	Fig.111	P
/	All channels	18GHz-26GHz	Fig.112	P

See ANNEX C for test graphs.

Conclusion: PASS

B.5.2 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength(μ V/m)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

802.11b mode

Channel	Frequency Range	AE	Test Results	Conclusion
6	30 MHz ~1 GHz	AE1	Fig.113	P
		AE2	Fig.114	P
		AE3	Fig.115	P
		AE4	Fig.116	P
		AE5	Fig.117	P
		AE6	Fig.118	P

Note:

The testing shall be performed on middle channel firstly. If there is no emission signal received, the low and high channel could be ignored . Otherwise the testing shall be performed on low , middle and high channel for each frequency ranges and modulations.

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	1 GHz ~3 GHz	Fig.119	P
		3 GHz ~ 18 GHz	Fig.120	P
	6	1 GHz ~3 GHz	Fig.121	P
		3 GHz ~ 18 GHz	Fig.122	P
	11	1 GHz ~3 GHz	Fig.123	P
		3 GHz ~ 18 GHz	Fig.124	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.125	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.126	P
802.11g	1	1 GHz ~3 GHz	Fig.127	P
		3 GHz ~ 18 GHz	Fig.128	P
	6	30 MHz ~1 GHz	Fig.129	P
		1 GHz ~3 GHz	Fig.130	P
		3 GHz ~ 18 GHz	Fig.131	P
	11	1 GHz ~3 GHz	Fig.132	P
		3 GHz ~ 18 GHz	Fig.133	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.134	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.135	P

802.11n mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (20M)	1	1 GHz ~3 GHz	Fig.136	P
		3 GHz ~ 18 GHz	Fig.137	P
	6	30 MHz ~1 GHz	Fig.138	P
		1 GHz ~3 GHz	Fig.139	P
		3 GHz ~ 18 GHz	Fig.140	
	11	1 GHz ~3 GHz	Fig.141	P
		3 GHz ~ 18 GHz	Fig.142	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.143	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.144	P
/	All channels	18 GHz~ 26.5 GHz	Fig.145	P

802.11b CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dB μ V/m)
2386.363	44.4	-38.8	27.7	55.500	V	74.0
17874.375	58.6	-18.5	45.6	31.500	H	74.0
17940.938	57.9	-17.7	45.6	30.000	V	74.0
17961.563	57.6	-17.7	45.6	29.700	V	74.0
17900.625	57.4	-18.5	45.6	30.300	H	74.0
17925.938	57.2	-17.7	45.6	29.300	V	74.0

Frequency (MHz)	Average (dB μ V/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dB μ V/m)
2389.919	31.4	-38.8	27.7	42.500	V	54.0
17892.188	46.4	-18.5	45.6	19.300	H	54.0
17884.688	46.2	-18.5	45.6	19.100	V	54.0
17880.000	46.2	-18.5	45.6	19.100	V	54.0
17882.813	46.2	-18.5	45.6	19.100	H	54.0
17880.938	46.2	-18.5	45.6	19.100	V	54.0

802.11b CH 6(1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/m)
17922.188	57.9	-17.7	45.6	30.000	V	74.0
17902.500	57.9	-18.5	45.6	30.800	H	74.0
17970.938	57.2	-17.7	45.6	29.300	V	74.0
17857.500	57.2	-18.5	45.6	30.100	H	74.0
17900.625	57.1	-18.5	45.6	30.000	V	74.0
17885.625	57.1	-18.5	45.6	30.000	H	74.0

Frequency (MHz)	Average (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/m)
17879.063	46.5	-18.5	45.6	19.400	H	54.0
17871.563	46.4	-18.5	45.6	19.300	V	54.0
17877.188	46.3	-18.5	45.6	19.200	V	54.0
17874.375	46.2	-18.5	45.6	19.100	H	54.0
17891.250	46.2	-18.5	45.6	19.100	H	54.0
17883.750	46.2	-18.5	45.6	19.100	V	54.0

802.11b CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/)
2484.506	44.5	-38.9	27.7	55.700	H	74.0
17878.125	58.9	-18.5	45.6	31.800	V	74.0
17967.188	57.5	-17.7	45.6	29.600	V	74.0
17947.500	57.3	-17.7	45.6	29.400	V	74.0
17916.563	57.3	-17.7	45.6	29.400	H	74.0
17872.500	57.3	-18.5	45.6	30.200	V	74.0

Frequency (MHz)	Average (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/m)
2484.013	31.9	-38.9	27.7	43.100	H	54.0
17862.188	46.6	-18.5	45.6	19.500	V	54.0
17886.563	46.5	-18.5	45.6	19.400	V	54.0
17890.313	46.4	-18.5	45.6	19.300	H	54.0
17879.063	46.4	-18.5	45.6	19.300	V	54.0
17894.063	46.4	-18.5	45.6	19.300	V	54.0

802.11g CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/m)
2389.956	47.7	-38.8	27.7	58.800	H	74.0
17955.938	58.7	-17.7	45.6	30.800	V	74.0
17985.938	57.8	-17.7	45.6	29.900	V	74.0
17960.625	57.7	-17.7	45.6	29.800	H	74.0
17910.938	57.6	-18.5	45.6	30.500	H	74.0
17903.438	57.6	-18.5	45.6	30.500	V	74.0

Frequency (MHz)	Average (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/m)
2389.963	33.1	-38.8	27.7	44.200	H	54.0
17886.563	46.5	-18.5	45.6	19.400	V	54.0
17869.688	46.4	-18.5	45.6	19.300	H	54.0
17874.375	46.3	-18.5	45.6	19.200	V	54.0
17868.750	46.3	-18.5	45.6	19.200	H	54.0
17890.313	46.3	-18.5	45.6	19.200	H	54.0

802.11g CH6 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/m)
17882.813	59.7	-18.5	45.6	32.600	V	74.0
17848.125	57.8	-18.5	45.6	30.700	H	74.0
17933.438	57.3	-17.7	45.6	29.400	V	74.0
17870.625	57.2	-18.5	45.6	30.100	H	74.0
17862.188	57.2	-18.5	45.6	30.100	V	74.0
17898.750	57.2	-18.5	45.6	30.100	V	74.0

Frequency (MHz)	Average (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/m)
17903.438	46.3	-18.5	45.6	19.200	V	54.0
17890.313	46.3	-18.5	45.6	19.200	H	54.0
17868.750	46.3	-18.5	45.6	19.200	V	54.0
17866.875	46.3	-18.5	45.6	19.200	H	54.0
17896.875	46.2	-18.5	45.6	19.100	H	54.0
17877.188	46.2	-18.5	45.6	19.100	V	54.0

802.11g CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dBμV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBμV/m)
2483.550	52.0	-38.9	27.7	63.200	V	74.0
17856.563	57.7	-18.5	45.6	30.600	V	74.0
17839.688	57.7	-18.5	45.6	30.600	H	74.0
17911.875	57.5	-18.5	45.6	30.400	H	74.0
17874.375	57.4	-18.5	45.6	30.300	H	74.0
17835.000	57.3	-18.5	45.6	30.200	V	74.0

Frequency (MHz)	Average (dBµV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBµV/m)
2483.506	33.9	-38.9	27.7	45.100	H	54.0
17862.188	46.5	-18.5	45.6	19.400	H	54.0
17891.250	46.5	-18.5	45.6	19.400	V	54.0
17881.875	46.4	-18.5	45.6	19.300	V	54.0
17883.750	46.4	-18.5	45.6	19.300	H	54.0
17899.688	46.4	-18.5	45.6	19.300	V	54.0

802.11n-20MHz CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBµV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBµV/m)
2389.981	47.5	-38.8	27.7	58.600	V	74.0
17969.063	57.4	-17.7	45.6	29.500	V	74.0
17858.438	57.2	-18.5	45.6	30.100	H	74.0
17897.813	57.1	-18.5	45.6	30.000	H	74.0
17907.188	57.1	-18.5	45.6	30.000	H	74.0
17910.000	57.1	-18.5	45.6	30.000	H	74.0

Frequency (MHz)	Average (dBµV/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dBµV/m)
2389.944	32.6	-38.8	27.7	43.700	V	54.0
17900.625	46.5	-18.5	45.6	19.400	H	54.0
17907.188	46.4	-18.5	45.6	19.300	H	54.0
17872.500	46.4	-18.5	45.6	19.300	H	54.0
17895.938	46.2	-18.5	45.6	19.100	V	54.0
17880.938	46.2	-18.5	45.6	19.100	H	54.0

802.11n-20MHz CH6 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dB μ V/m)
17905.313	57.7	-18.5	45.6	30.600	V	74.0
17972.813	57.4	-17.7	45.6	29.500	H	74.0
17895.000	57.4	-18.5	45.6	30.300	H	74.0
17853.750	57.2	-18.5	45.6	30.100	H	74.0
17876.250	57.2	-18.5	45.6	30.100	V	74.0
17892.188	57.1	-18.5	45.6	30.000	V	74.0

Frequency (MHz)	Average (dB μ V/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dB μ V/m)
17905.313	46.3	-18.5	45.6	19.200	V	54.0
17880.938	46.3	-18.5	45.6	19.200	V	54.0
17893.125	46.2	-18.5	45.6	19.100	V	54.0
17883.750	46.2	-18.5	45.6	19.100	H	54.0
17886.563	46.1	-18.5	45.6	19.000	V	54.0
17891.250	46.1	-18.5	45.6	19.000	V	54.0

802.11n-20MHz CH11 (1-18GHz)

Frequency (MHz)	MaxPeak (dB μ V/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dB μ V/m)
2484.213	50.0	-38.9	27.7	61.200	V	74.0
17886.563	57.6	-18.5	45.6	30.500	H	74.0
17967.188	57.4	-17.7	45.6	29.500	H	74.0
17878.125	57.3	-18.5	45.6	30.200	V	74.0
17858.438	57.3	-18.5	45.6	30.200	H	74.0
17896.875	57.2	-18.5	45.6	30.100	H	74.0

Frequency (MHz)	Average (dB μ V/m)	Pathloss. (dB)	antenna factor	Receiver (dBm)	Polarization	Limit (dB μ V/m)
2483.763	32.9	-38.9	27.7	44.100	V	54.0
17875.313	46.6	-18.5	45.6	19.500	V	54.0
17872.500	46.5	-18.5	45.6	19.400	H	54.0
17881.875	46.4	-18.5	45.6	19.300	H	54.0
17900.625	46.4	-18.5	45.6	19.300	V	54.0
17888.438	46.3	-18.5	45.6	19.200	H	54.0

See ANNEX C for test graphs.

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

B.6 AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	Fig.66 to 56	Fig.146	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.146	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE2

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	Fig.67 to 56	Fig.147	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE2

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.147	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE3

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	Fig.68 to 56	Fig.148	P
0.5 to 5	56		
5 to 30	60		
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.			

WLAN (Average Limit)-AE3

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.148	P
0.5 to 5	46		
5 to 30	50		
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.			

WLAN (Quasi-peak Limit)-AE4

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	Fig.69 to 56	Fig.149	P
0.5 to 5	56		
5 to 30	60		
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.			

WLAN (Average Limit)-AE4

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.149	P
0.5 to 5	46		
5 to 30	50		
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.			

WLAN (Quasi-peak Limit)-AE5

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	Fig.70 to 56	Fig.150	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE5

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.150	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE6

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	Fig.71 to 56	Fig.151	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE6

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.151	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE1-idle

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	Fig.72 to 56	Fig.152	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1-idle

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.152	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

See ANNEX C for test graphs.

Conclusion: PASS

ANNEX C: TEST LAYOUTS

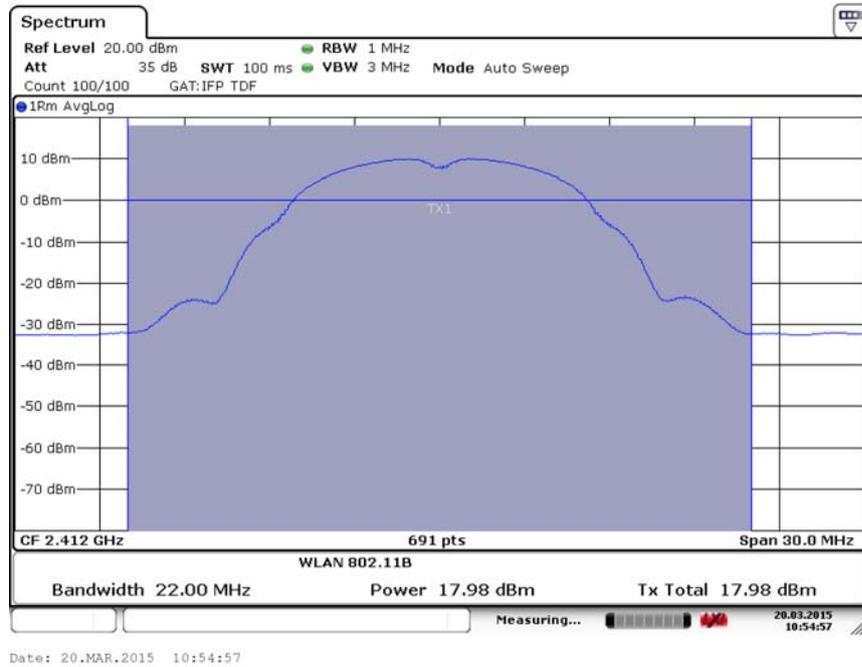


Fig.1 Maximum Average Output Power (802.11b, Ch 1,1Mbps)

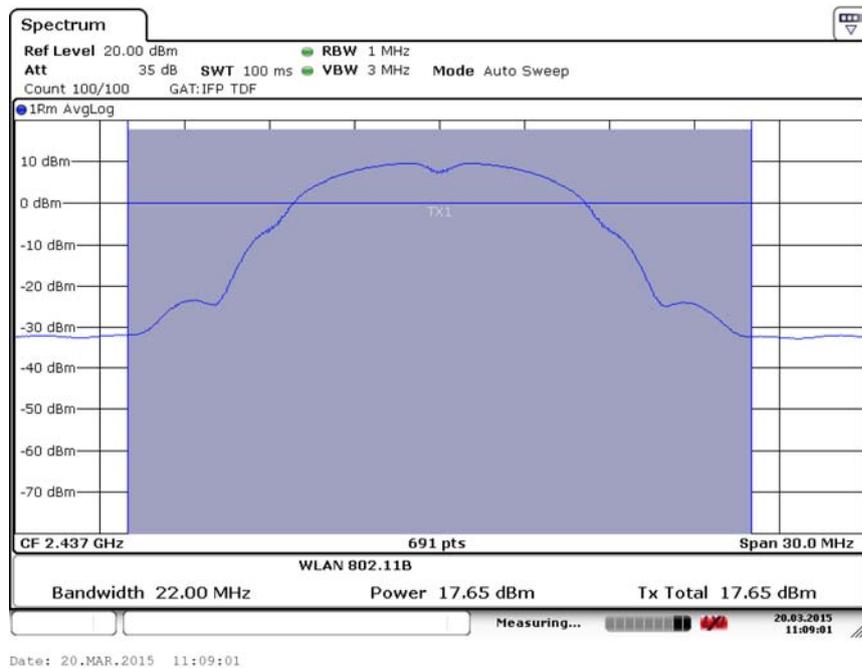


Fig.2 Maximum Average Output Power (802.11b, Ch 6,1Mbps)

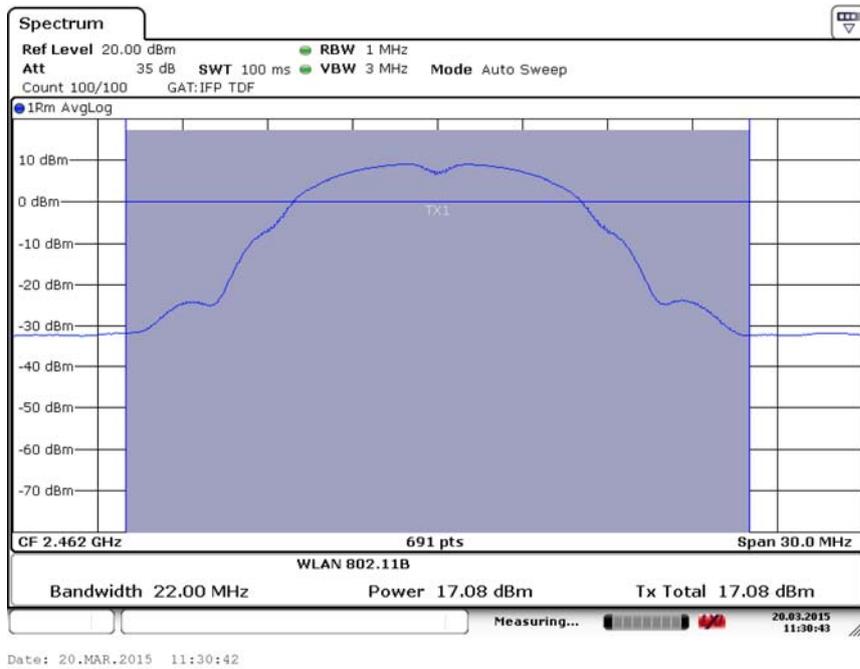


Fig.3 Maximum Average Output Power (802.11b, Ch 11,1Mbps)

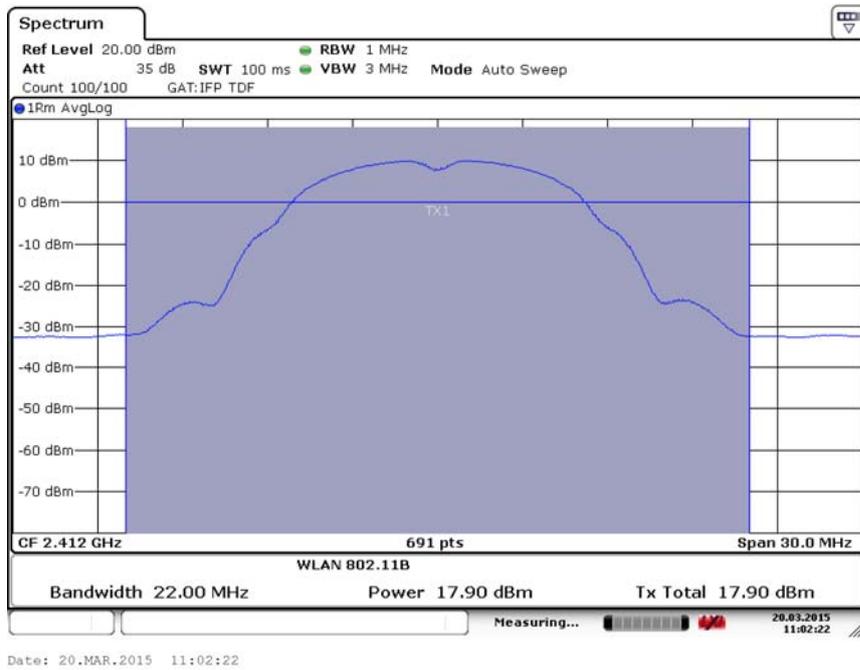


Fig.4 Maximum Average Output Power (802.11b, Ch 1,2Mbps)

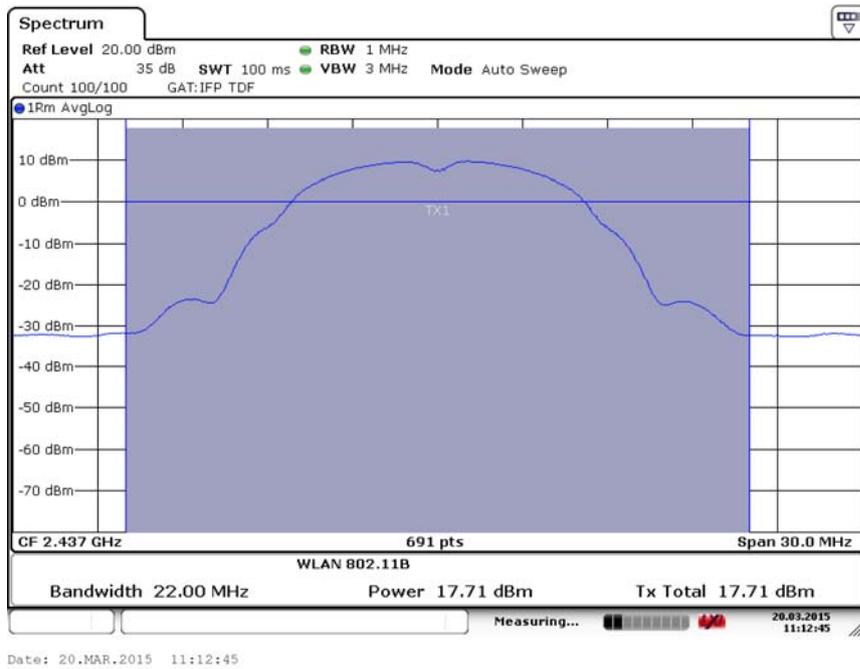


Fig.5 Maximum Average Output Power (802.11b, Ch 6,2Mbps)

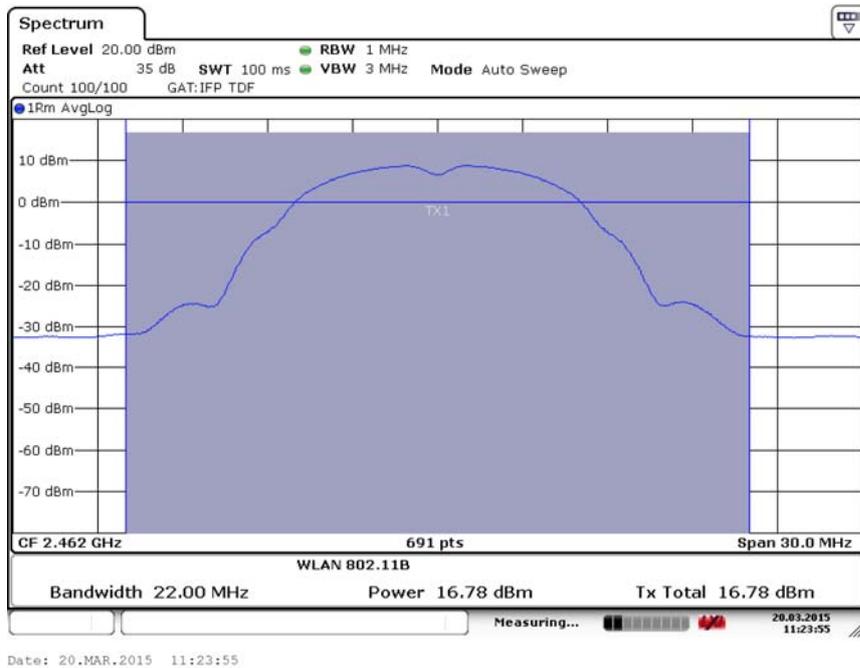


Fig.6 Maximum Average Output Power (802.11b, Ch 11,2Mbps)

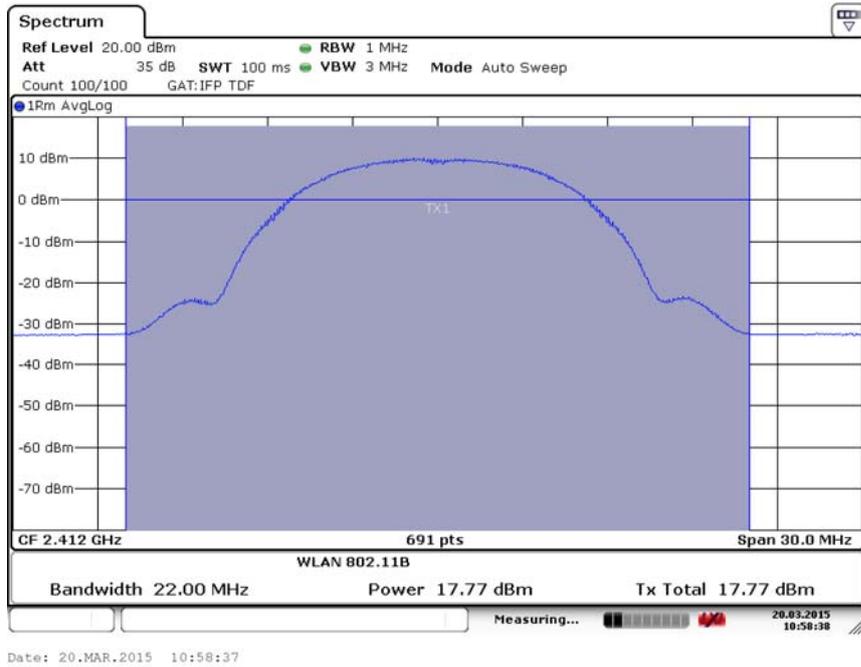


Fig.7 Maximum Average Output Power (802.11b, Ch 1,5Mbps)

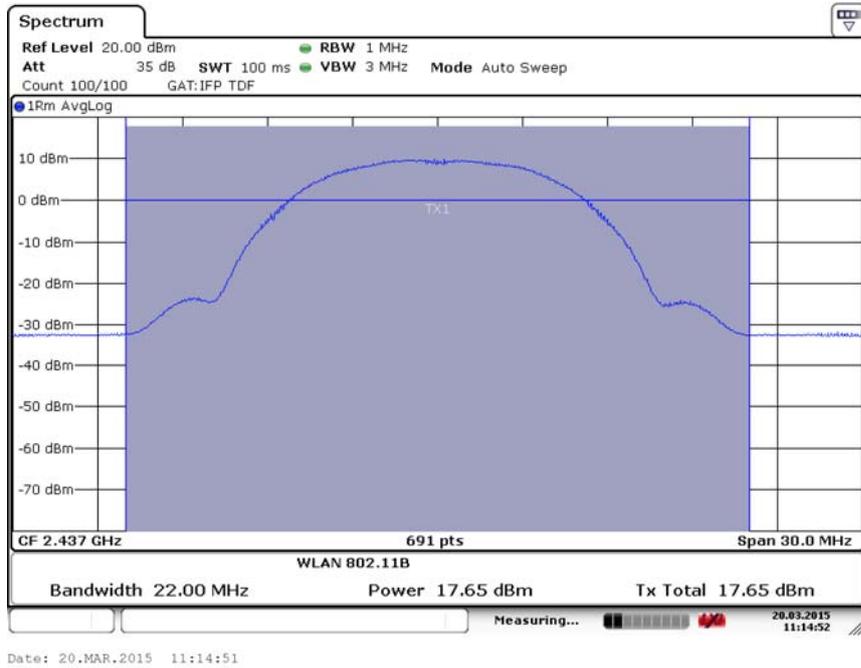


Fig.8 Maximum Average Output Power (802.11b, Ch 6,5Mbps)

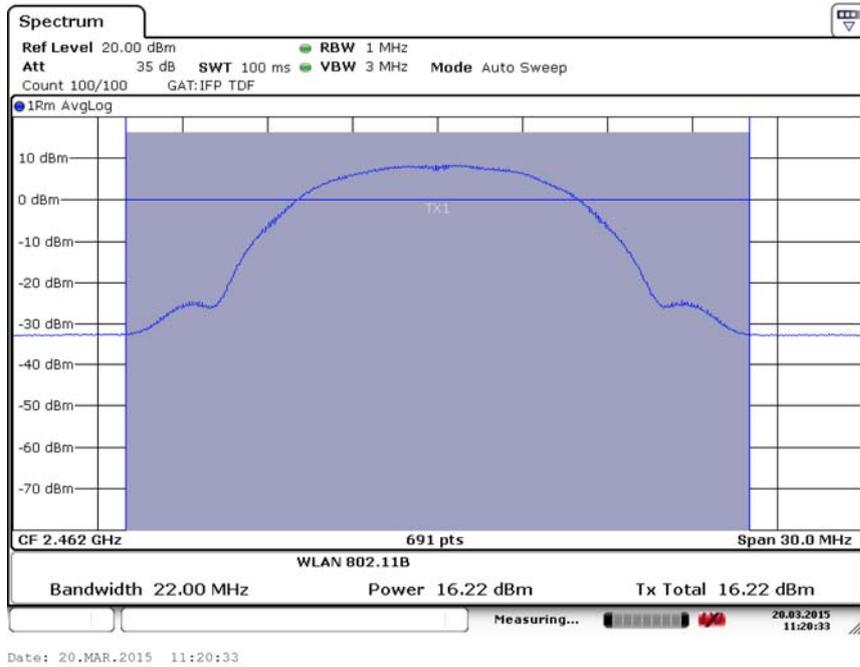


Fig.9 Maximum Average Output Power (802.11b, Ch 11,5.5Mbps)

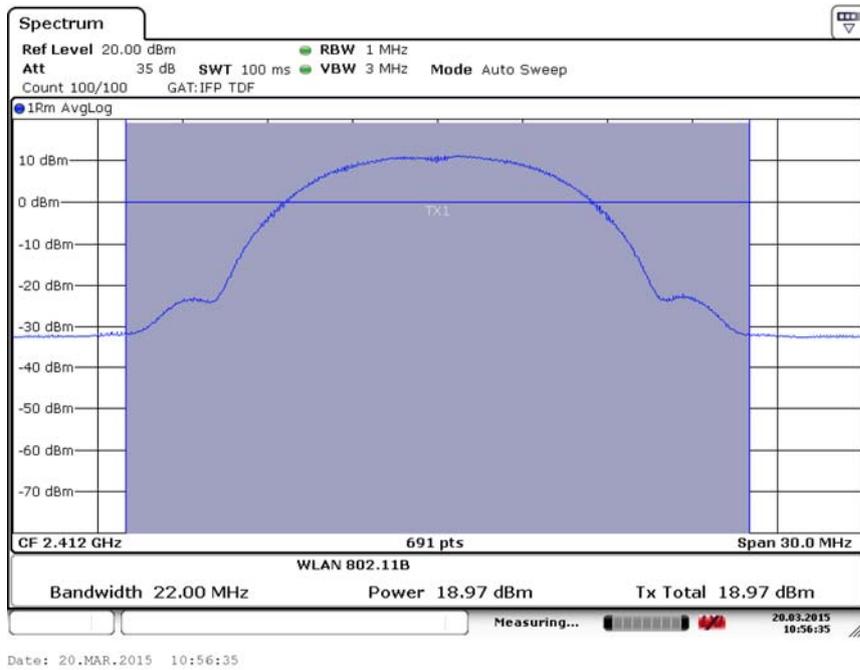


Fig.10 Maximum Average Output Power (802.11b, Ch 1,11Mbps)

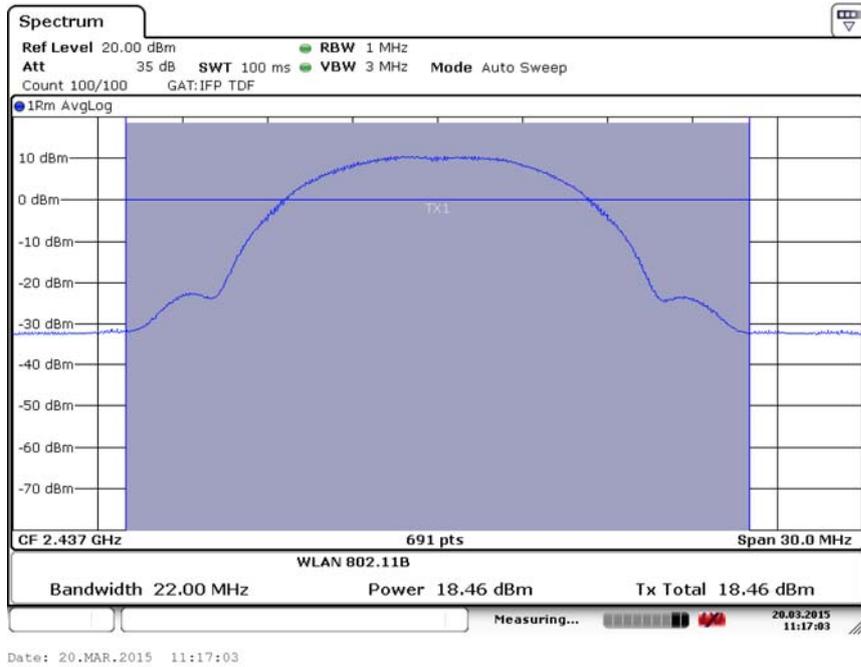


Fig.11 Maximum Average Output Power (802.11b, Ch 6,11Mbps)

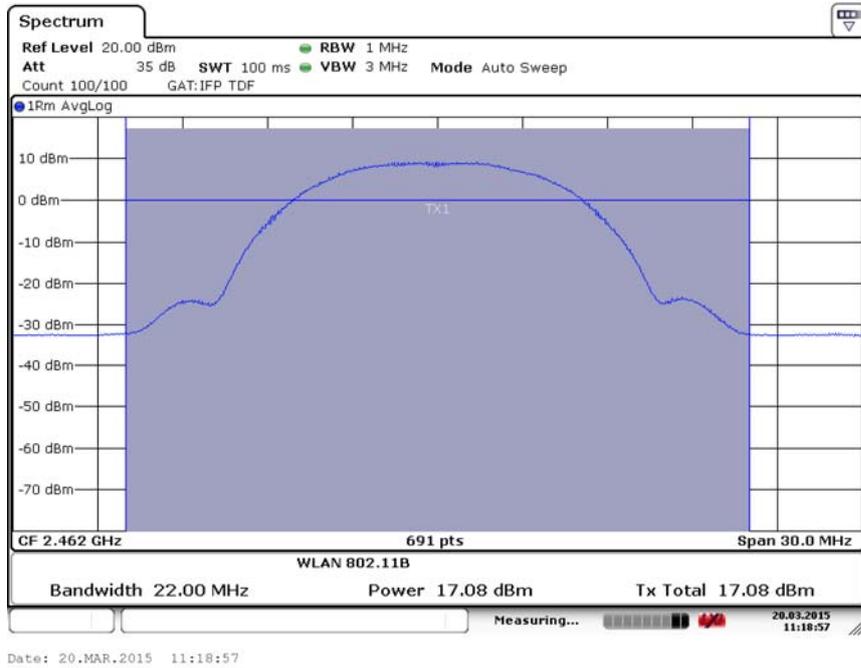


Fig.12 Maximum Average Output Power (802.11b, Ch 11,11Mbps)

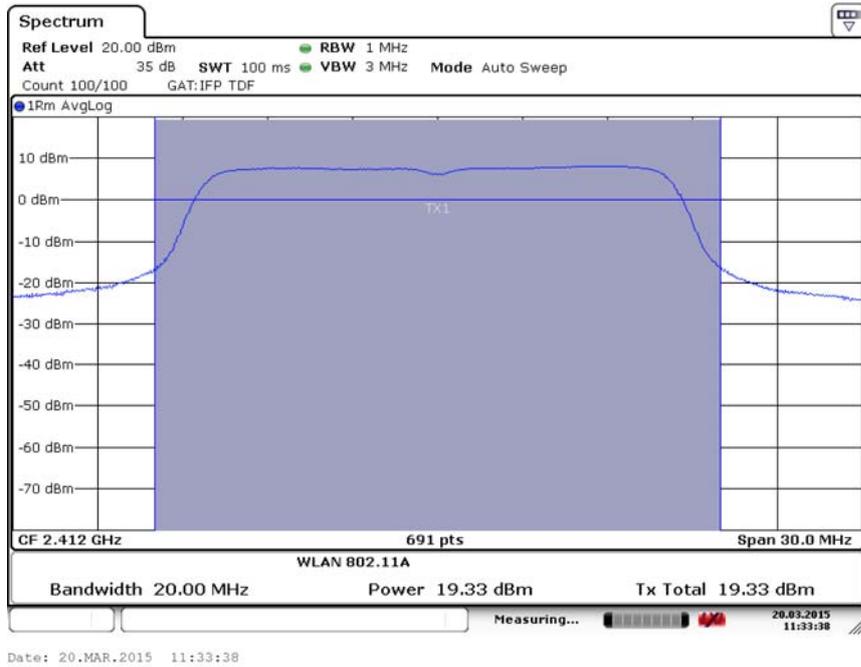


Fig.13 Maximum Average Output Power (802.11g, Ch 1,6Mbps)

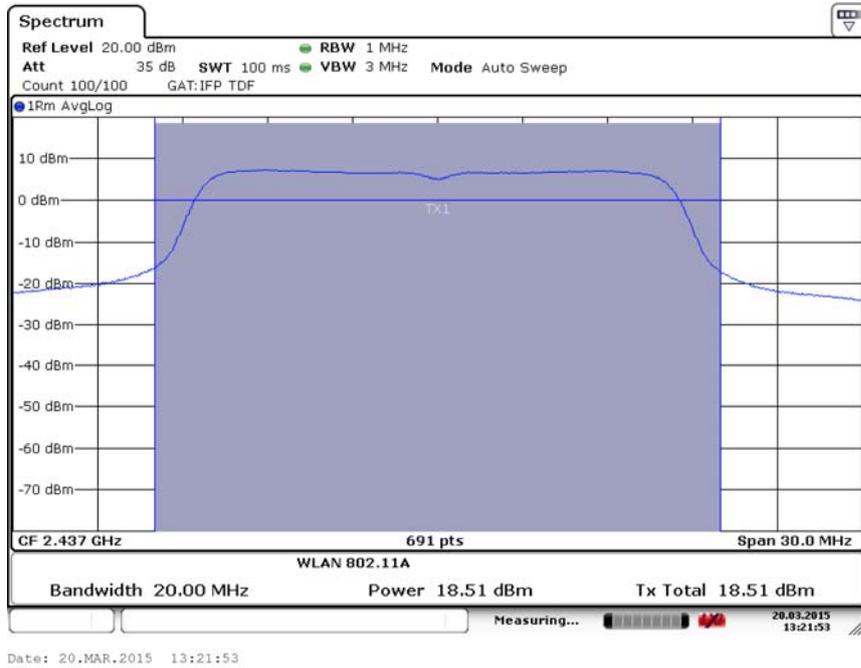


Fig.14 Maximum Average Output Power (802.11g, Ch 6,6Mbps)

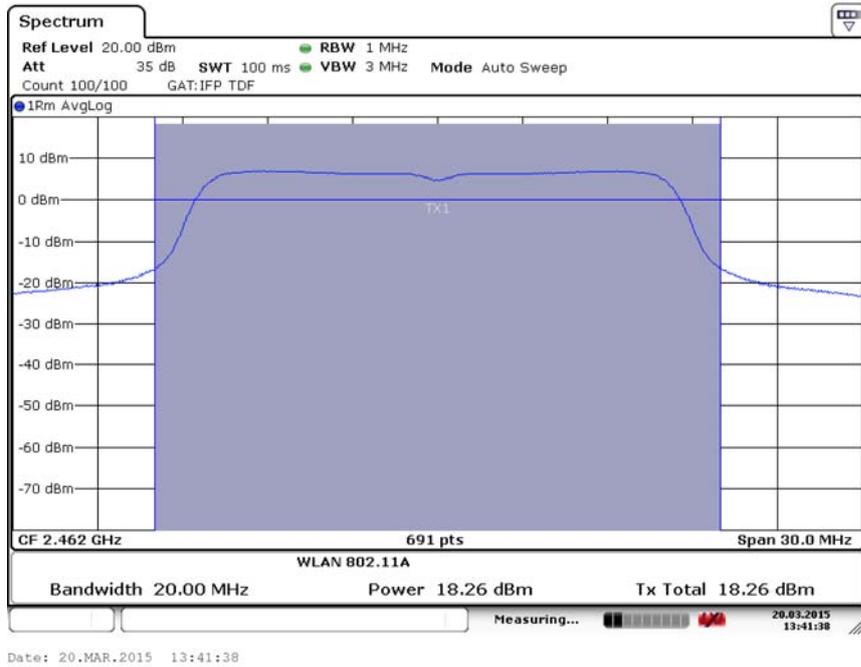


Fig.15 Maximum Average Output Power (802.11g, Ch 11,6Mbps)

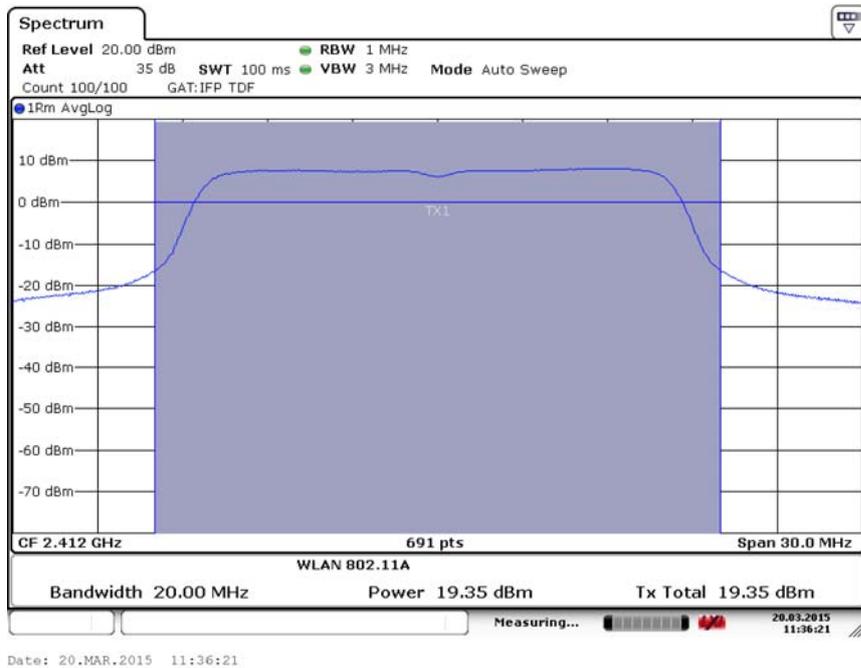


Fig.16 Maximum Average Output Power (802.11g, Ch 1,9Mbps)

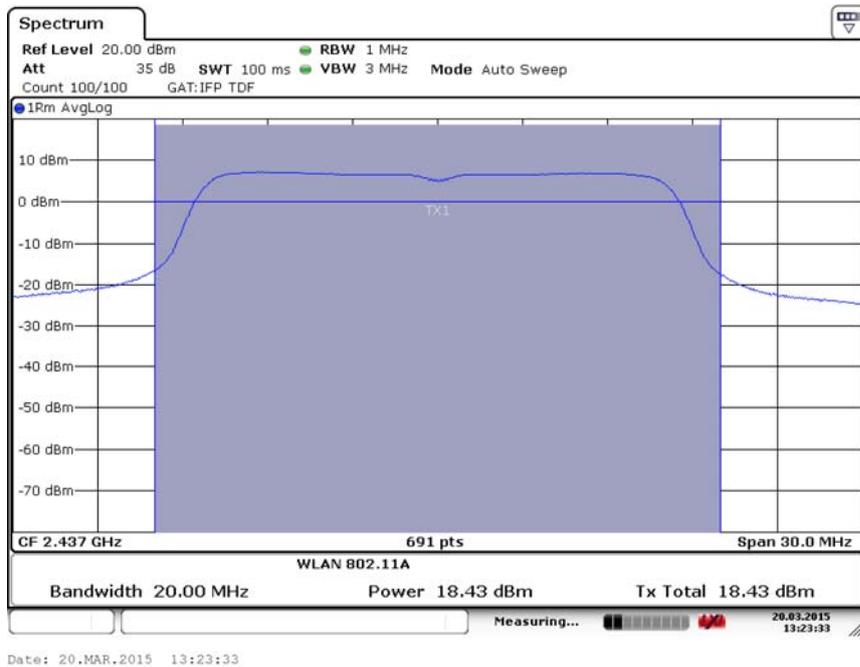


Fig.17 Maximum Average Output Power (802.11g, Ch 6,9Mbps)

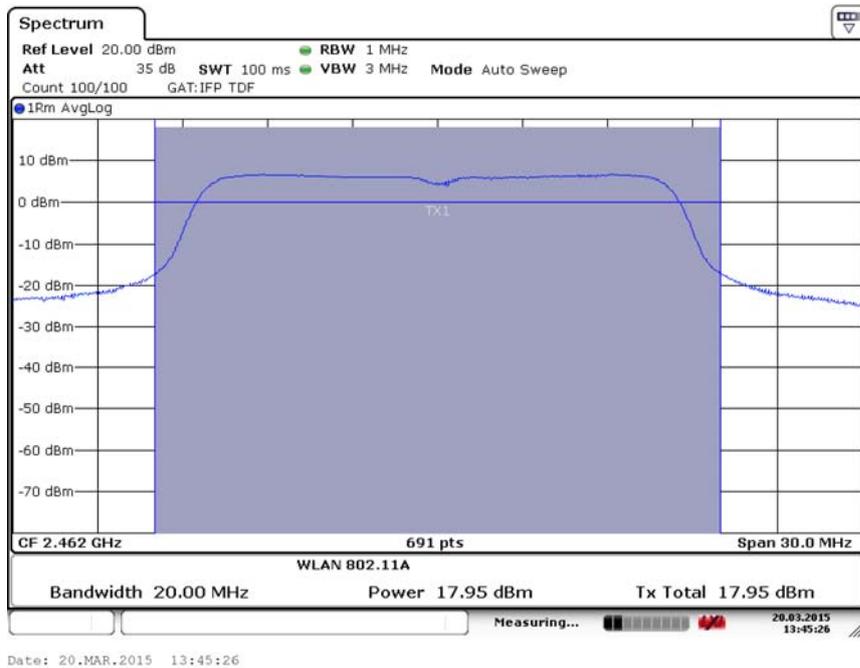


Fig.18 Maximum Average Output Power (802.11g, Ch 11,9Mbps)

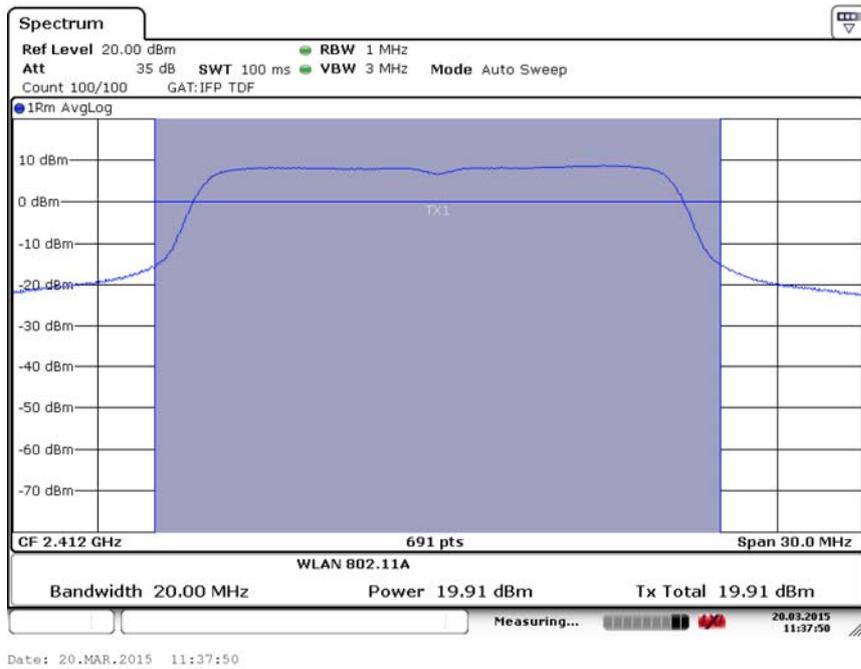


Fig.19 Maximum Average Output Power (802.11g, Ch 1,12Mbps)

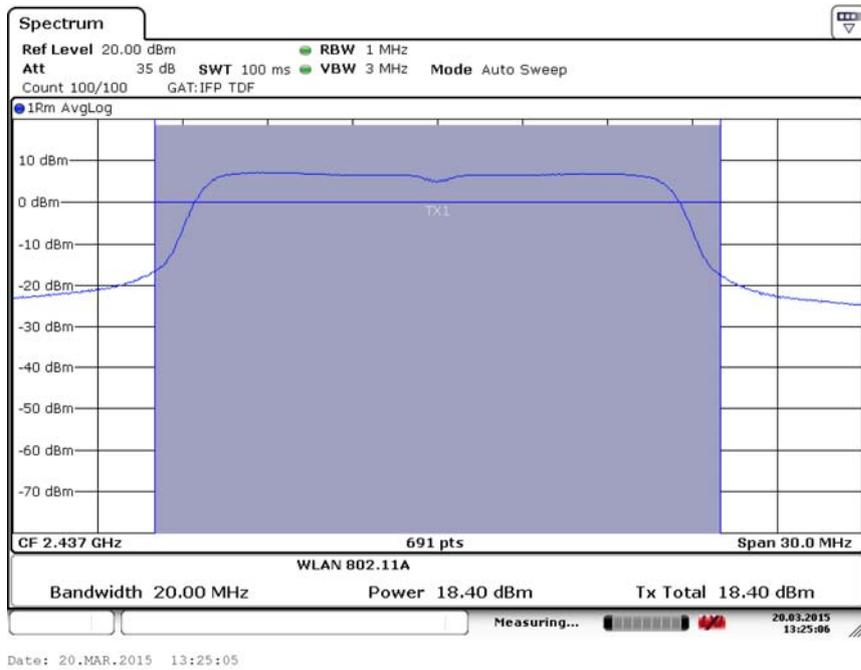


Fig.20 Maximum Average Output Power (802.11g, Ch 6,12Mbps)

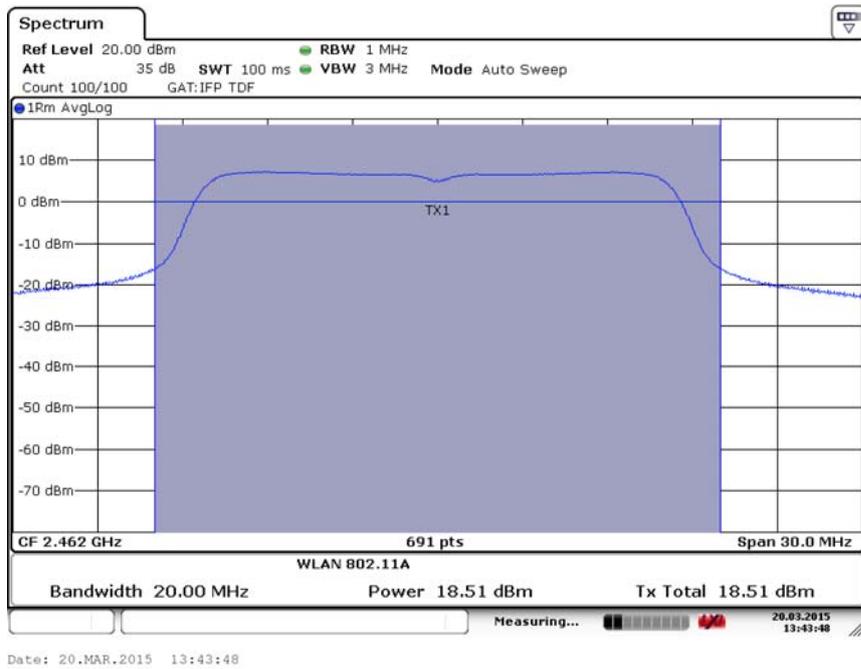


Fig.21 Maximum Average Output Power (802.11g, Ch 11,12Mbps)

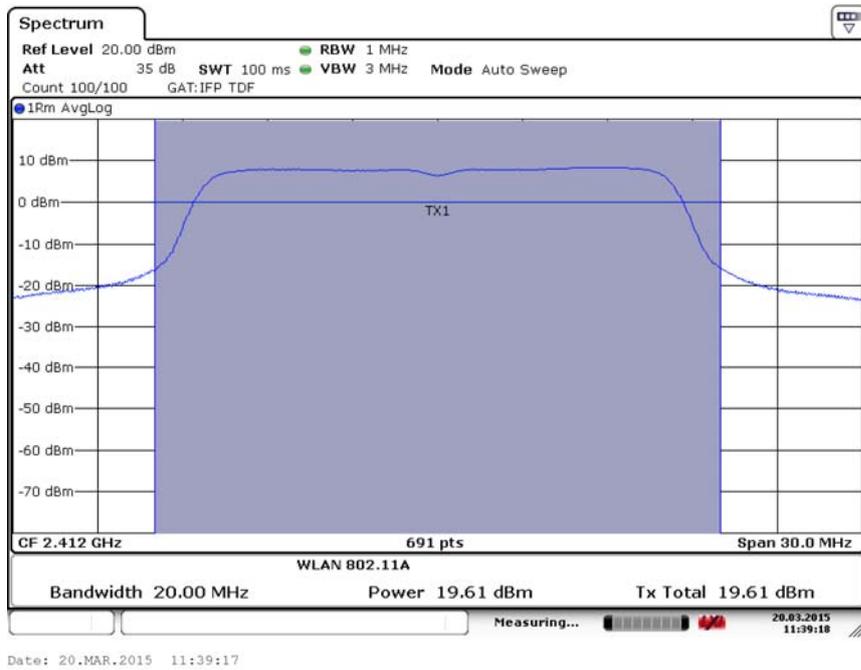


Fig.22 Maximum Average Output Power (802.11g, Ch 1,18Mbps)

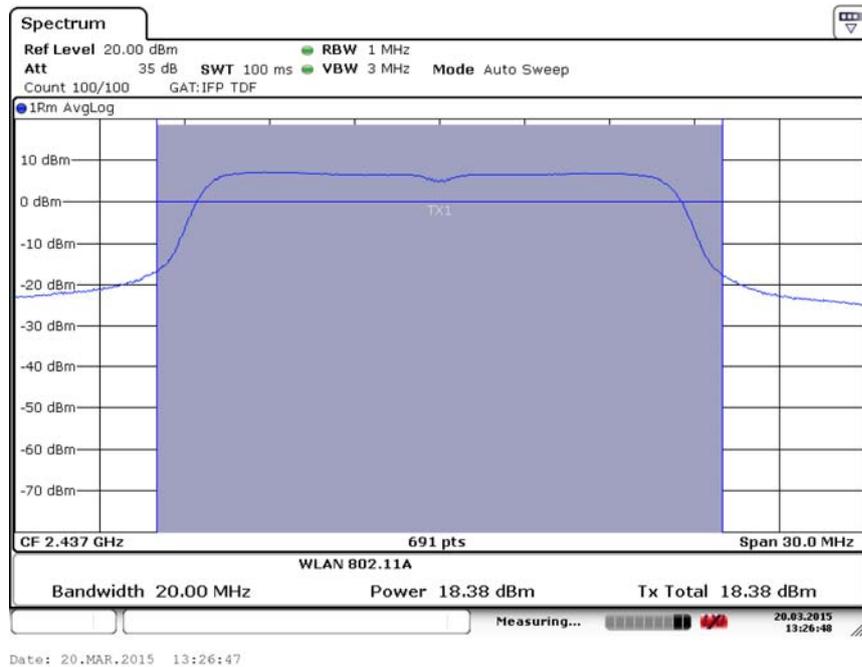


Fig.23 Maximum Average Output Power (802.11g, Ch 6,18Mbps)

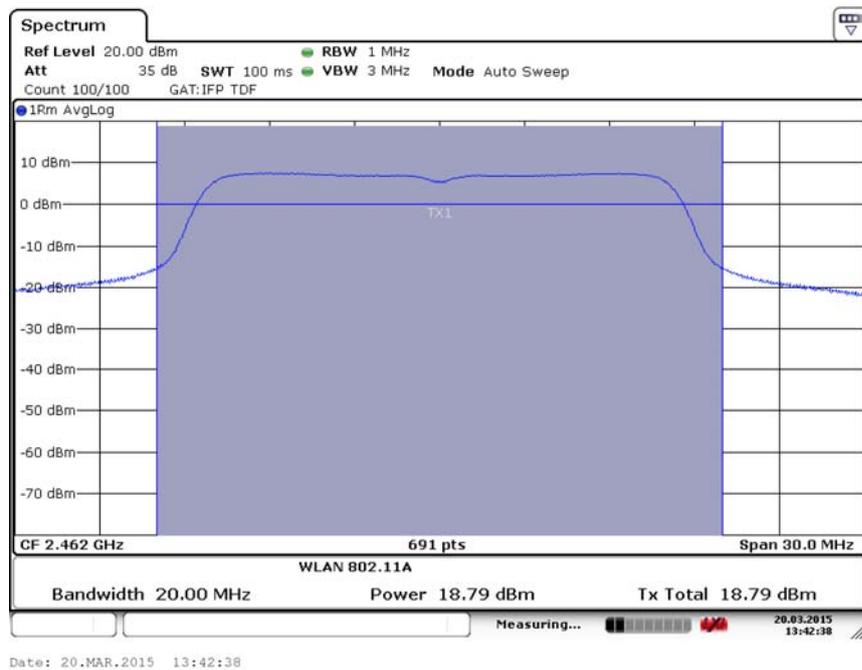


Fig.24 Maximum Average Output Power (802.11g, Ch 11,18Mbps)

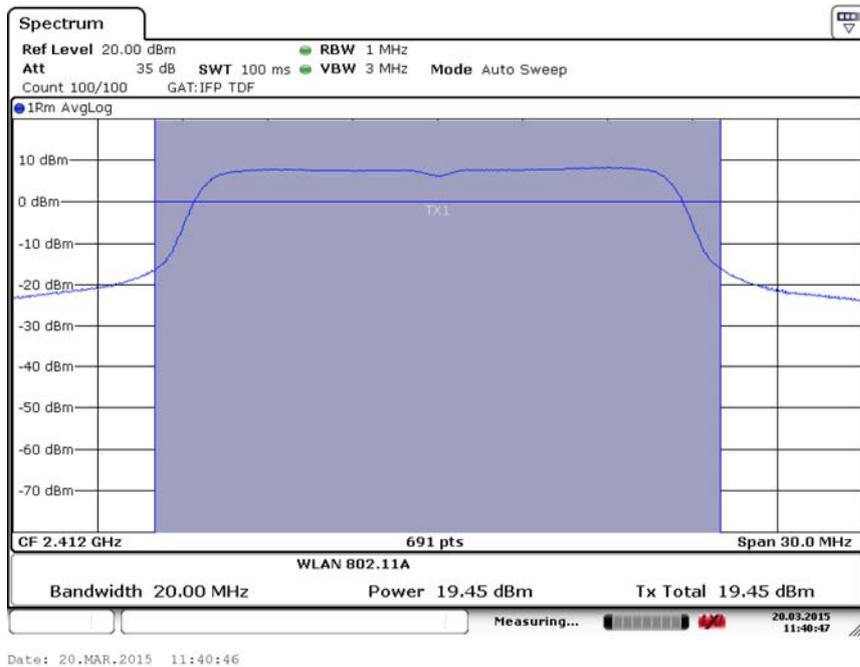


Fig.25 Maximum Average Output Power (802.11g, Ch 1,24Mbps)

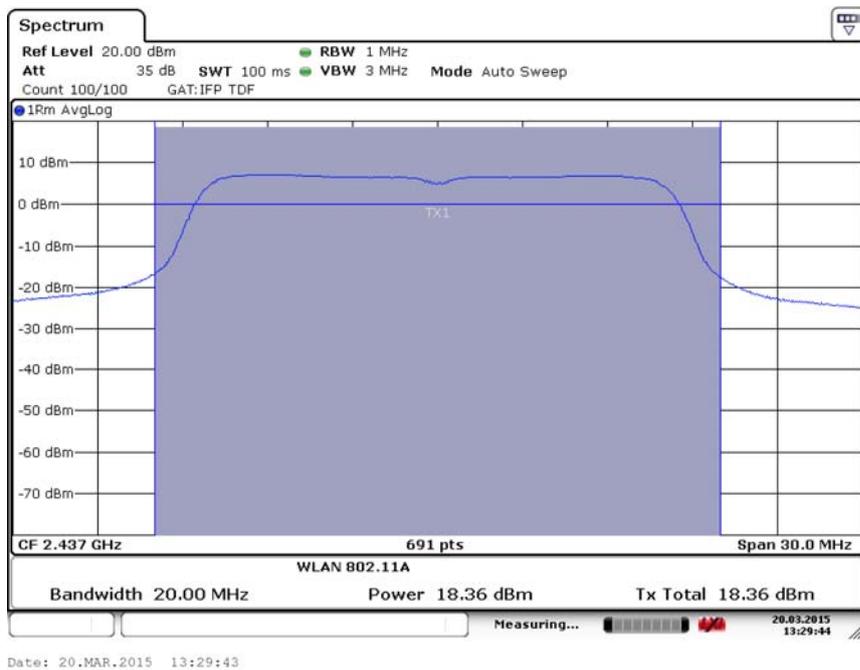


Fig.26 Maximum Average Output Power (802.11g, Ch 6,24Mbps)

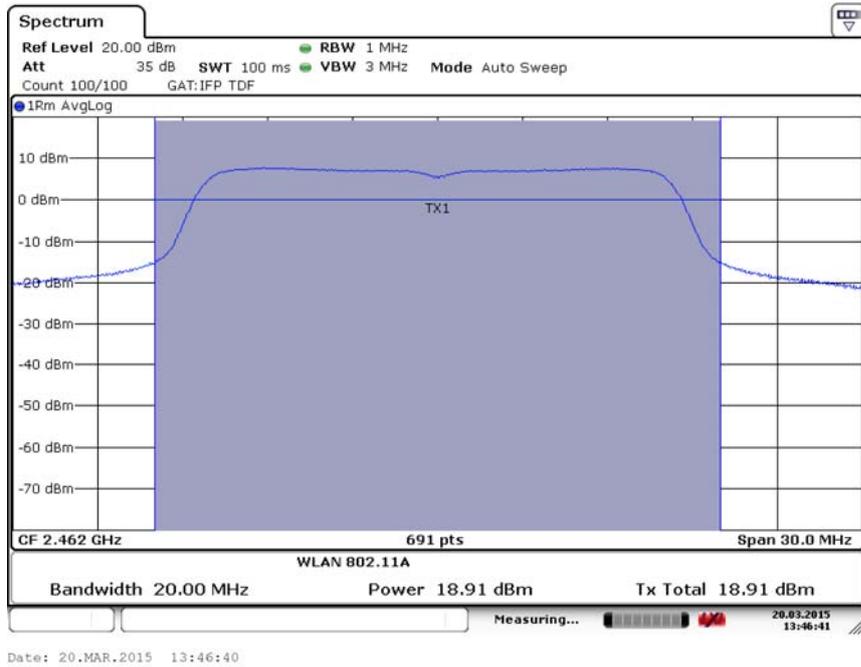


Fig.27 Maximum Average Output Power (802.11g, Ch 11,24Mbps)

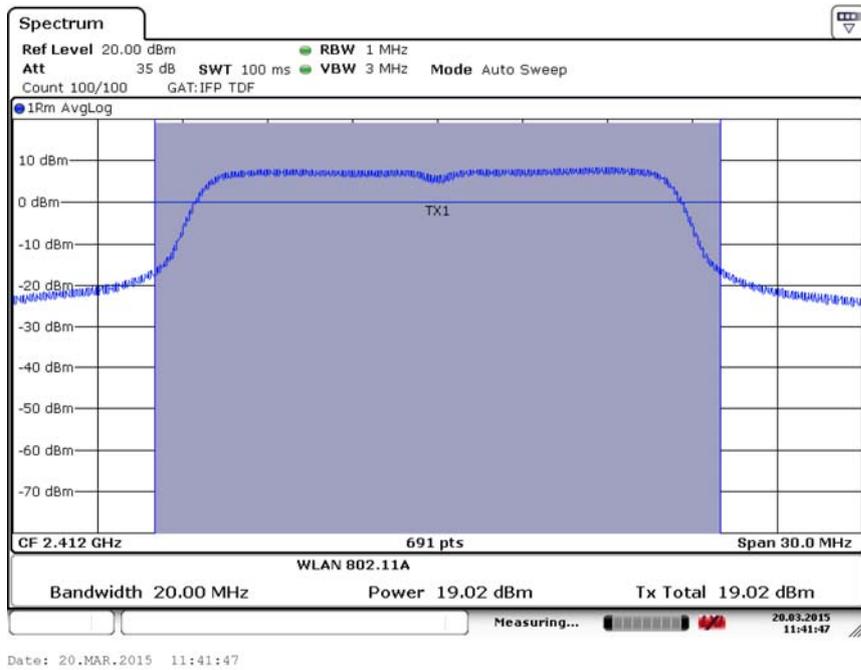


Fig.28 Maximum Average Output Power (802.11g, Ch 1,36Mbps)

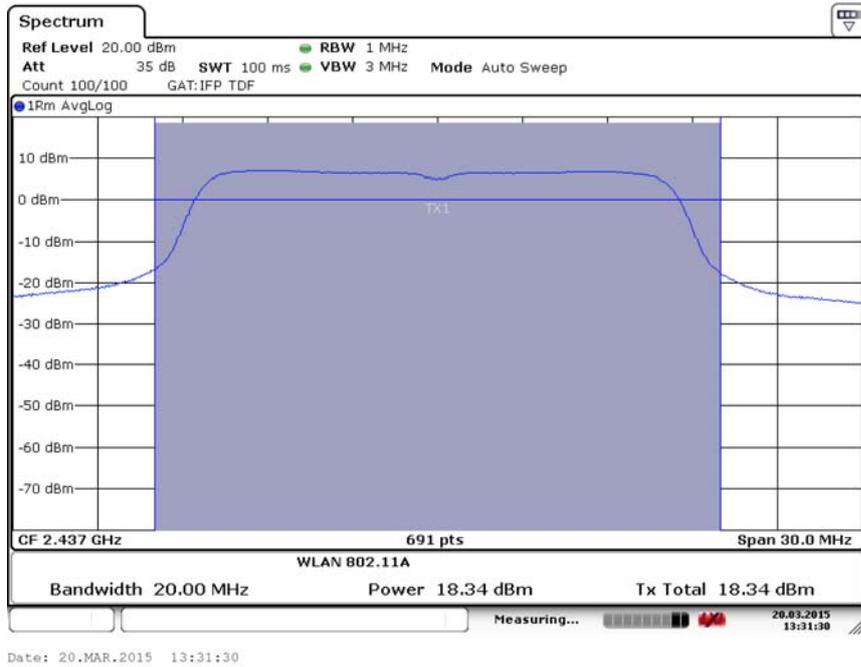


Fig.29 Maximum Average Output Power (802.11g, Ch 6,36Mbps)

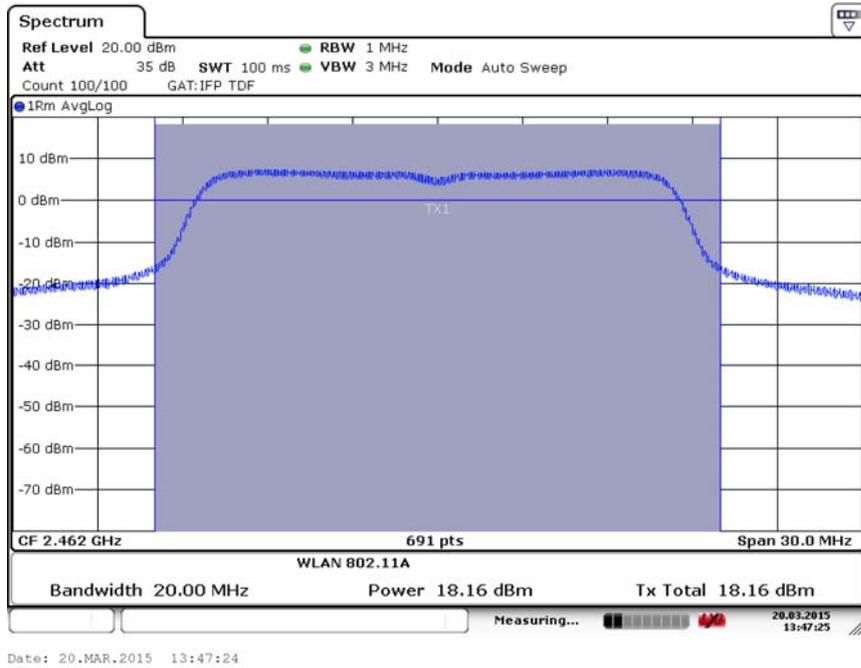


Fig.30 Maximum Average Output Power (802.11g, Ch 11,36Mbps)

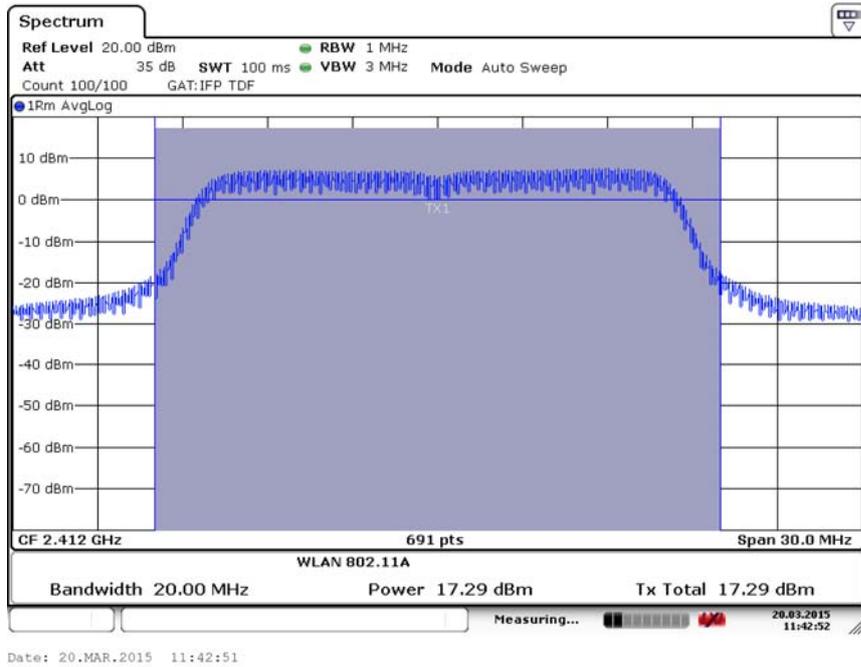


Fig.31 Maximum Average Output Power (802.11g, Ch 1,48Mbps)

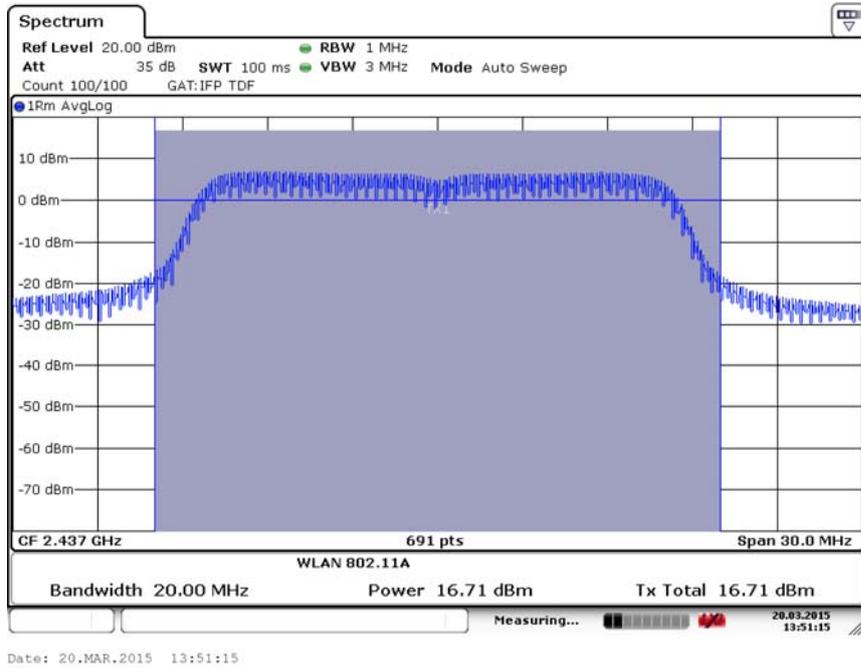


Fig.32 Maximum Average Output Power (802.11g, Ch 6,48Mbps)

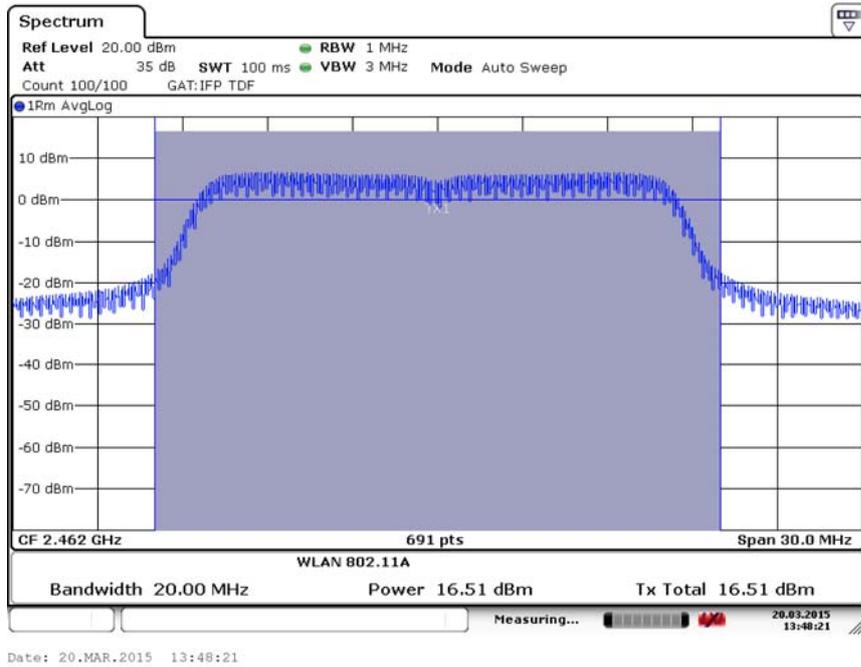


Fig.33 Maximum Average Output Power (802.11g, Ch 11,48Mbps)

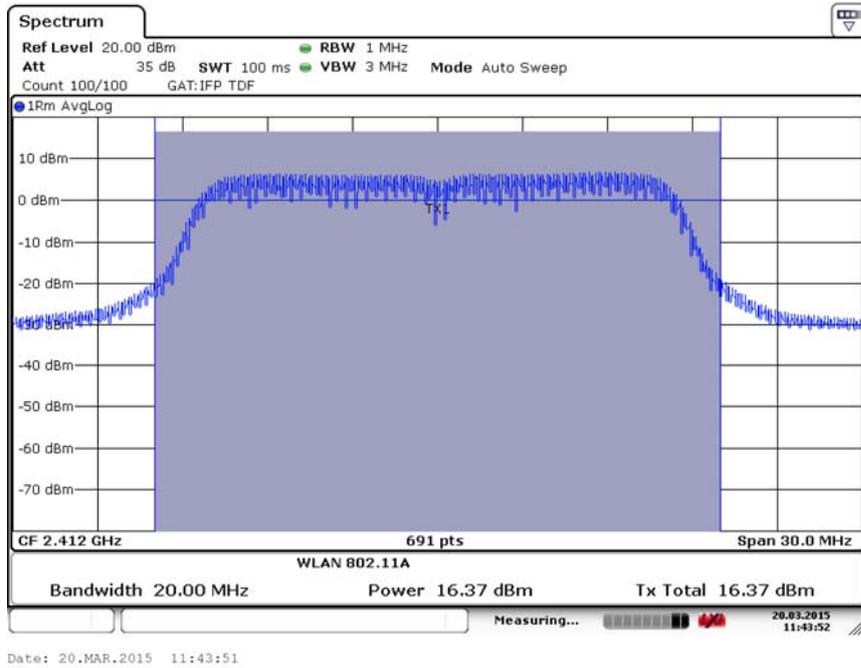


Fig.34 Maximum Average Output Power (802.11g, Ch 1,54Mbps)

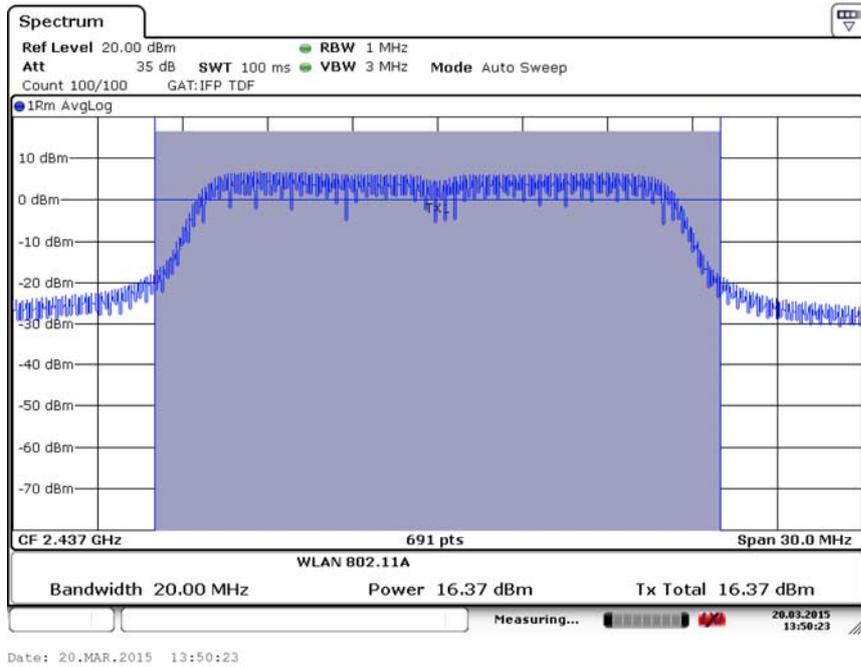


Fig.35 Maximum Average Output Power (802.11g, Ch 6,54Mbps)

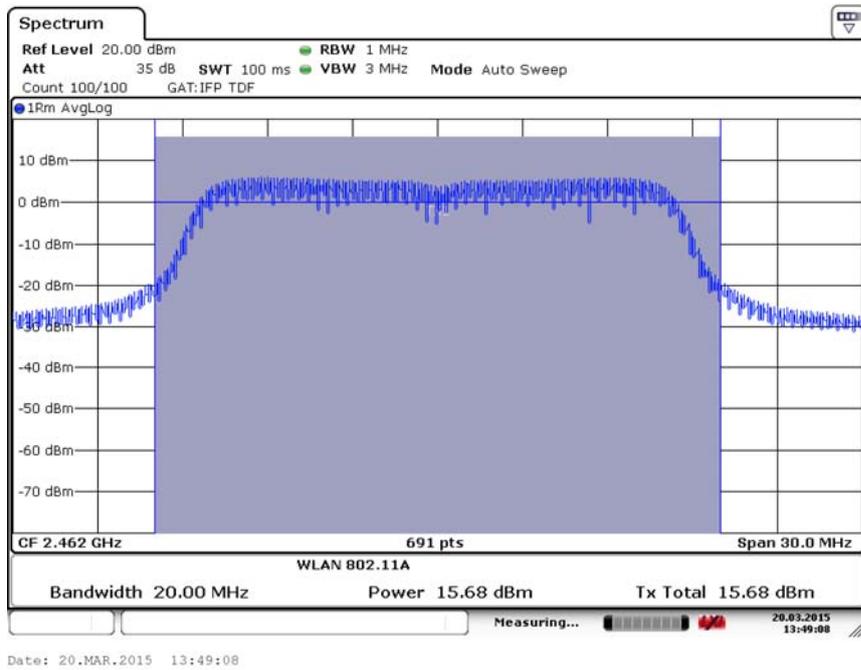


Fig.36 Maximum Average Output Power (802.11g, Ch 11,54Mbps)

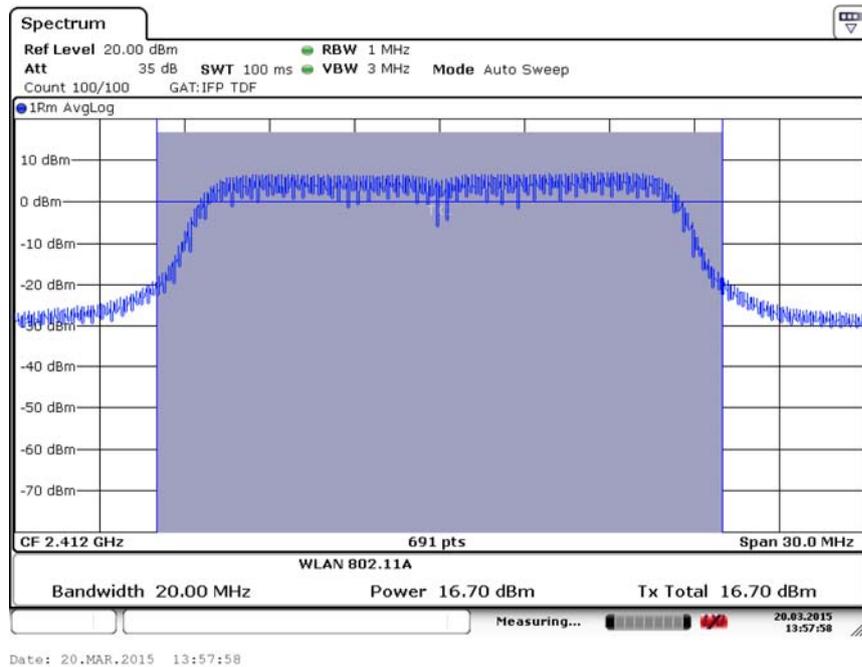


Fig.37 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS0)

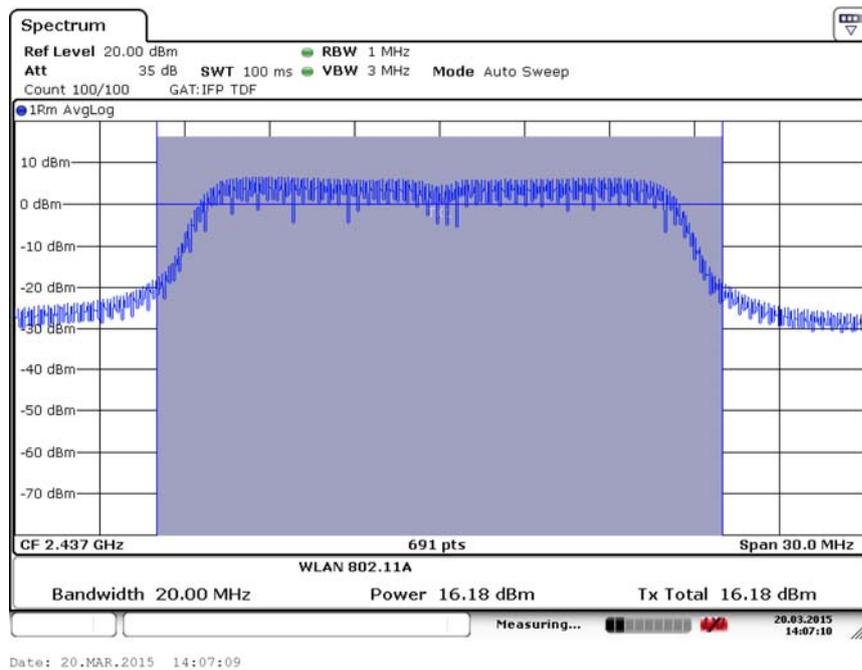


Fig.38 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS0)

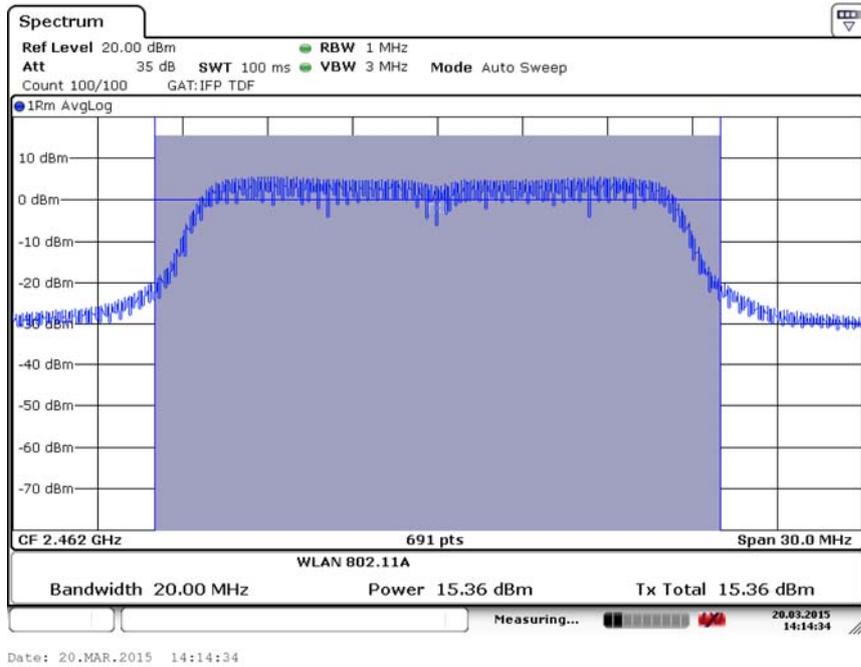


Fig.39 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS0)

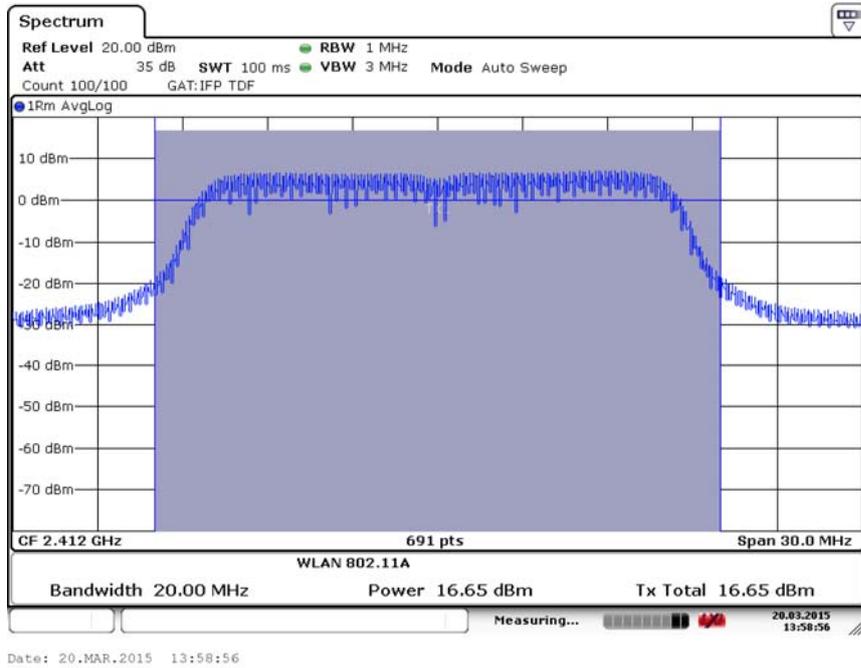


Fig.40 Maximum Average Output Power (802.11n-20MHz, Ch 1,MCS1)

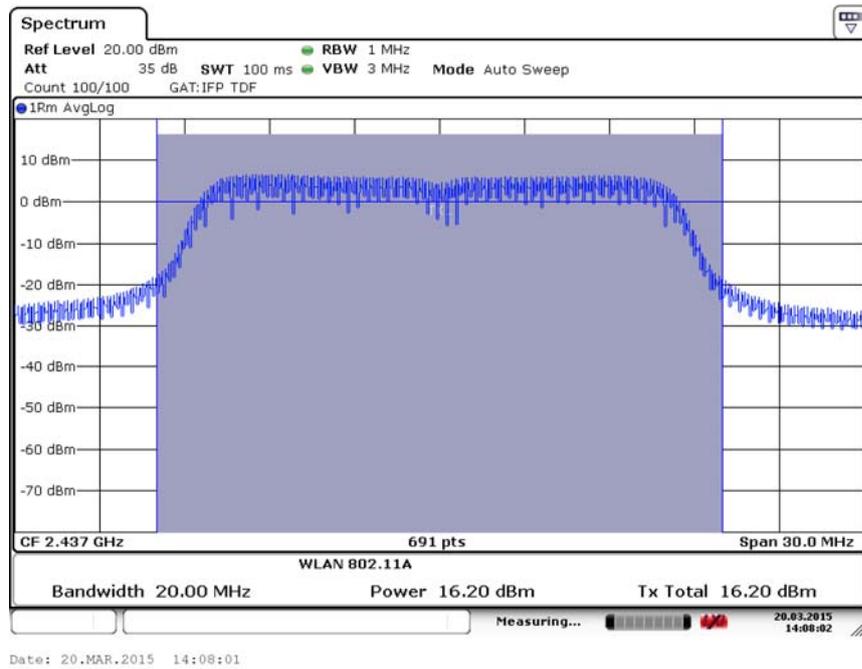


Fig.41 Maximum Average Output Power (802.11n-20MHz, Ch 6,MCS1)

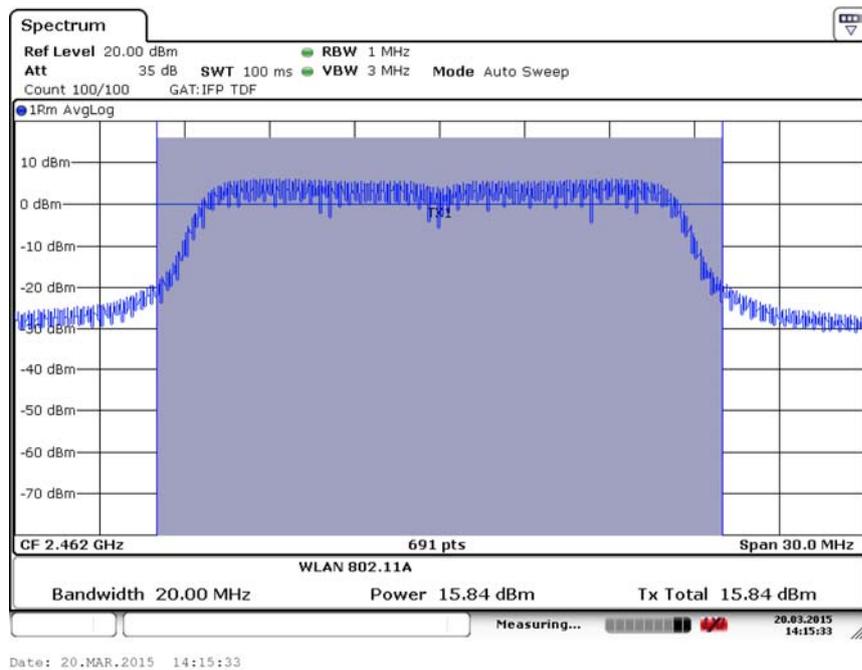


Fig.42 Maximum Average Output Power (802.11n-20MHz, Ch 11,MCS1)