


Site: AC1	Time: 2015/01/09 - 19:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5700MHz by 802.11n-HT20 Ant 1	

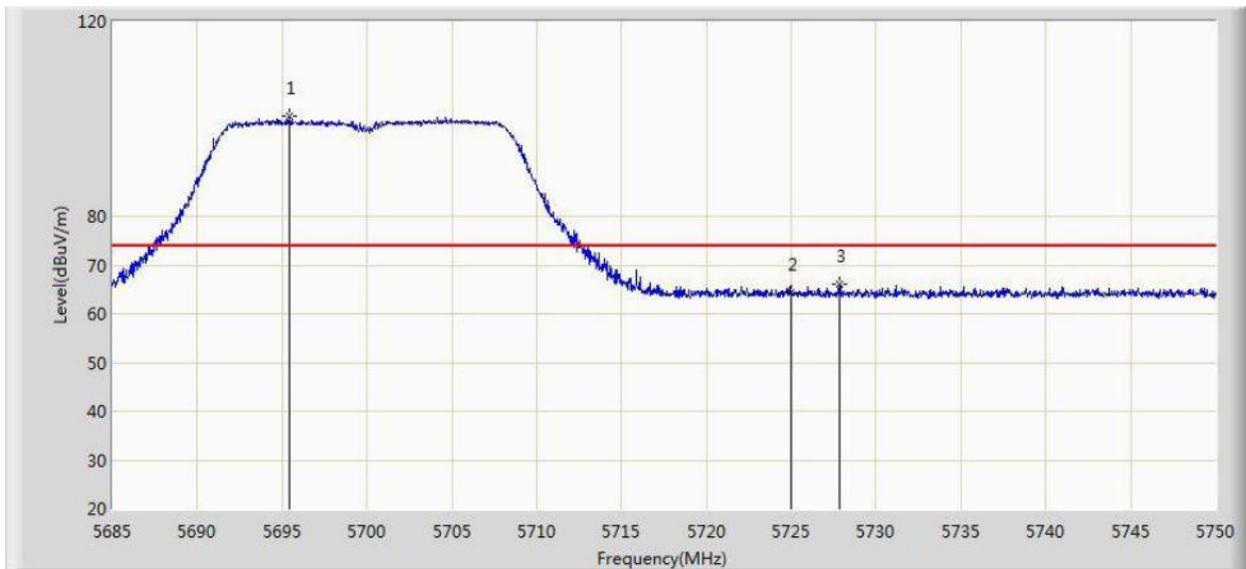


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.400	100.521	62.640	N/A	N/A	37.881	PK
2			5725.000	64.475	26.485	-9.525	74.000	37.990	PK
3			5727.835	66.089	28.088	-7.911	74.000	38.002	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 19:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5700MHz by 802.11n-HT20 Ant 1	

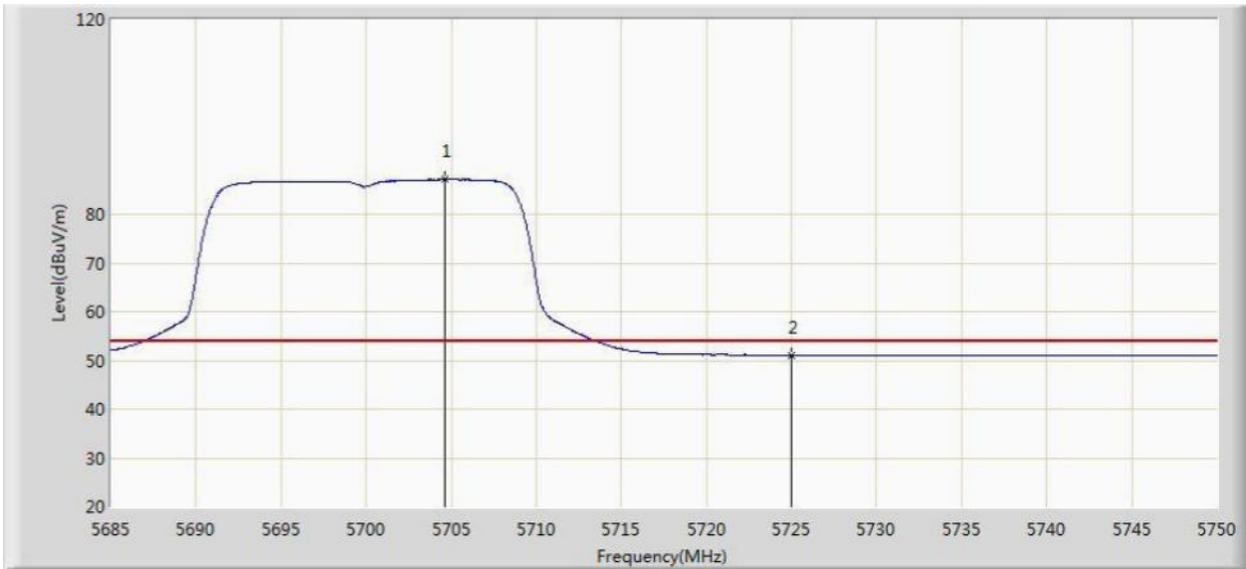


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5704.663	87.139	49.232	N/A	N/A	37.907	AV
2			5725.000	51.099	13.109	-2.901	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 19:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5700MHz by 802.11n-HT20 Ant 1	

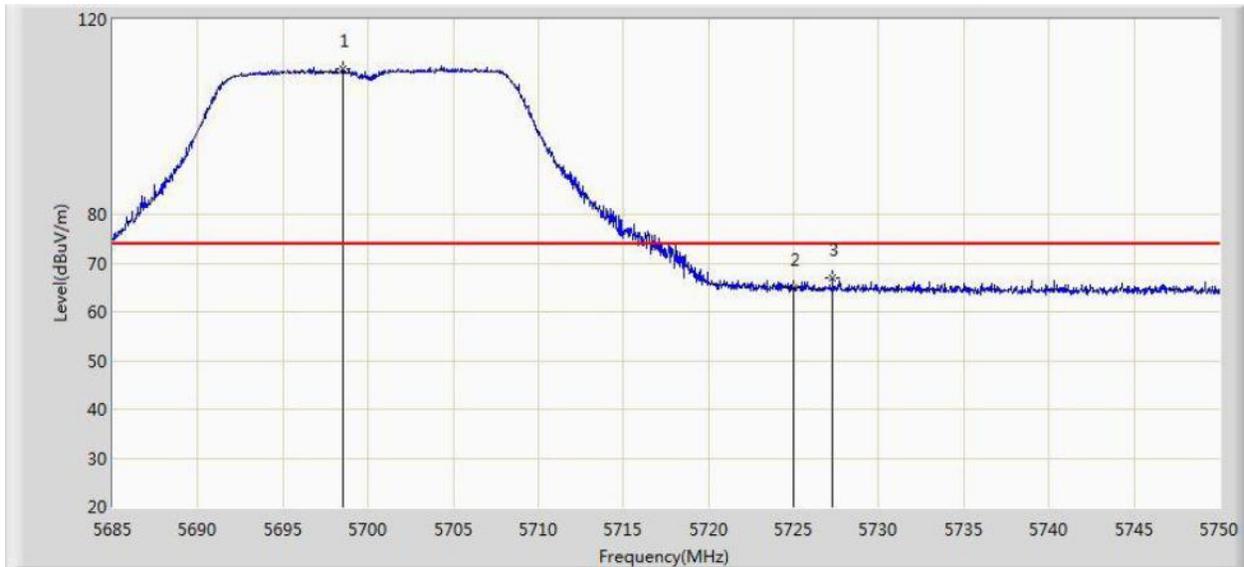


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5698.553	109.922	72.034	N/A	N/A	37.888	PK
2			5725.000	64.815	26.825	-9.185	74.000	37.990	PK
3			5727.283	66.905	28.906	-7.095	74.000	37.999	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 19:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5700MHz by 802.11n-HT20 Ant 1	

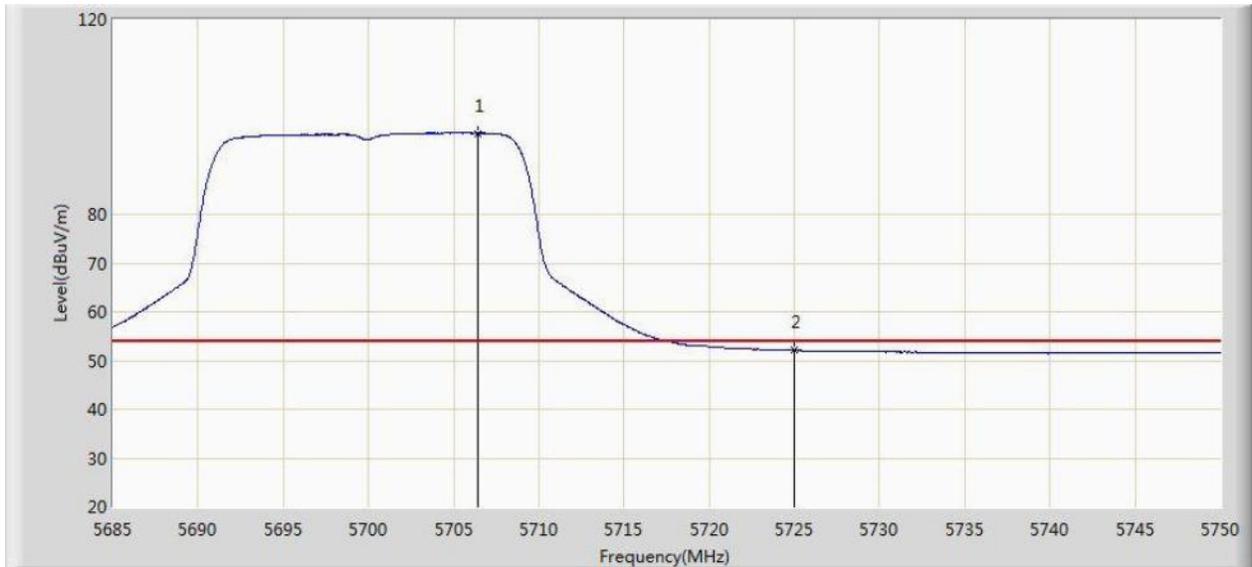


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.385	96.663	58.749	N/A	N/A	37.914	AV
2			5725.000	52.060	14.070	-1.940	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 09:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5745MHz by 802.11n-HT20 Ant 1	

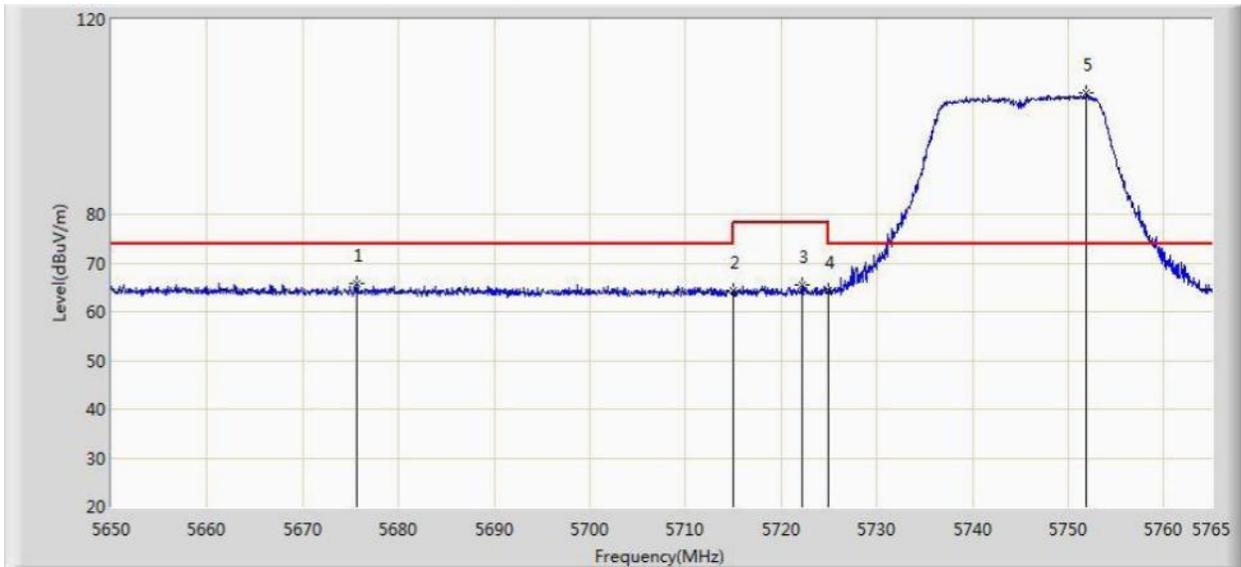


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5675.587	65.889	28.071	-8.111	74.000	37.818	PK
2			5715.000	64.293	26.344	-9.707	74.000	37.949	PK
3			5722.220	65.411	27.433	-12.789	78.200	37.978	PK
4			5725.000	64.271	26.281	-13.929	78.200	37.990	PK
5		*	5751.890	104.825	66.720	N/A	N/A	38.105	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 09:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5745MHz by 802.11n-HT20 Ant 1	

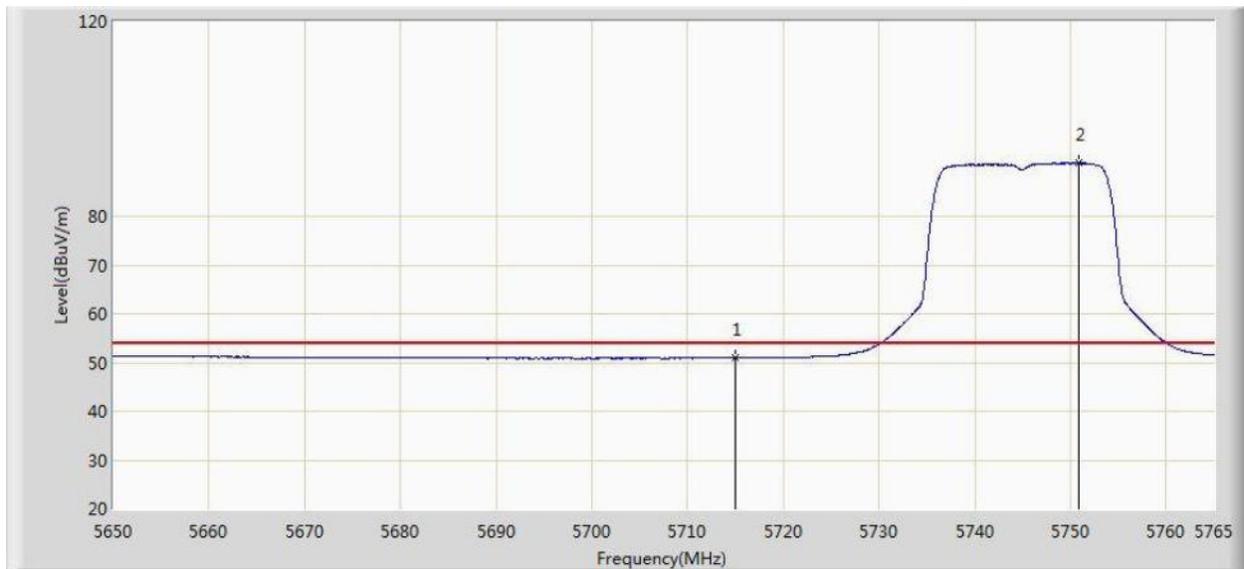


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.966	13.017	-3.034	54.000	37.949	AV
2		*	5750.913	90.969	52.869	N/A	N/A	38.100	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 09:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5745MHz by 802.11n-HT20 Ant 1	

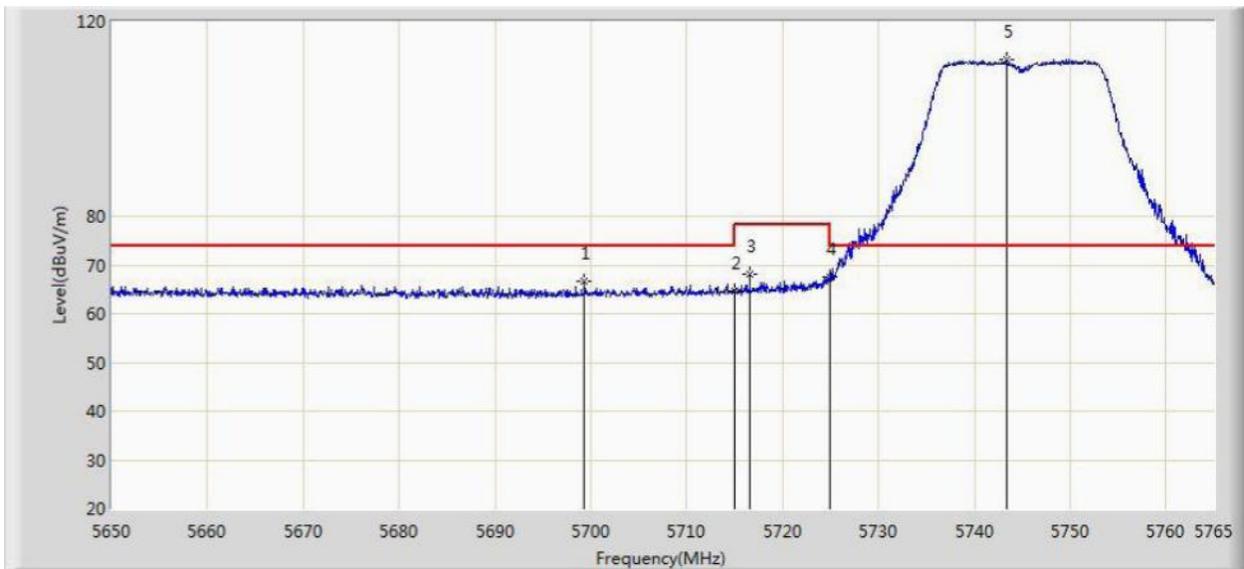


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5699.277	66.601	28.711	-7.399	74.000	37.890	PK
2			5715.000	64.668	26.719	-9.332	74.000	37.949	PK
3			5716.585	67.997	30.041	-10.203	78.200	37.956	PK
4			5725.000	67.679	29.689	-10.521	78.200	37.990	PK
5		*	5743.322	112.111	74.047	N/A	N/A	38.063	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 09:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5745MHz by 802.11n-HT20 Ant 1	

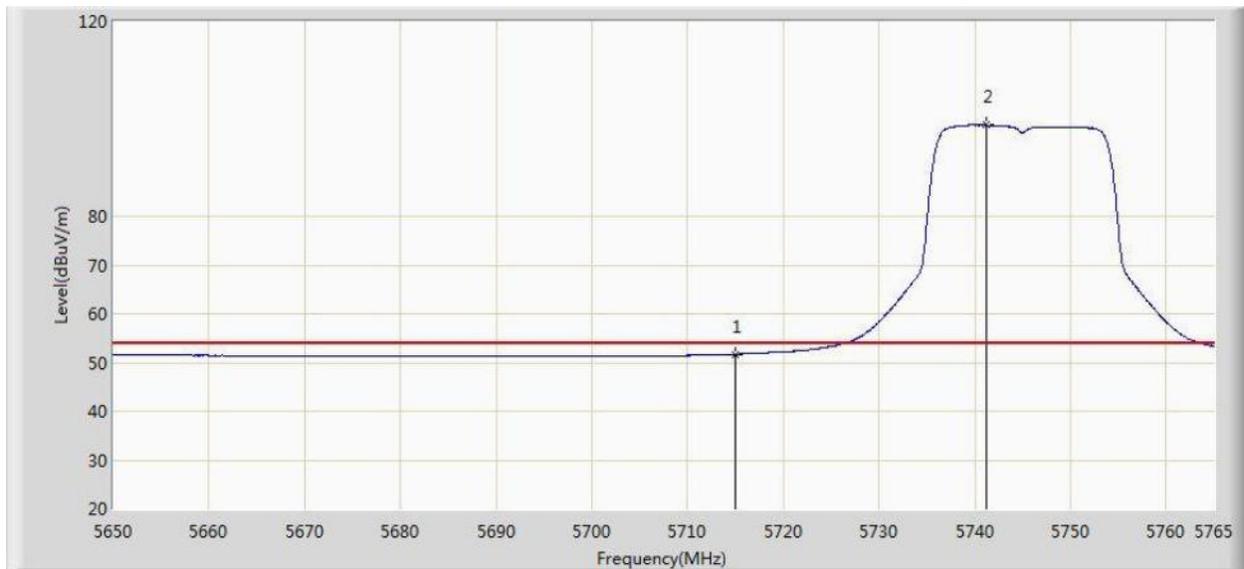


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.699	13.750	-2.301	54.000	37.949	AV
2		*	5741.252	98.741	60.685	N/A	N/A	38.055	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 09:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5825MHz by 802.11n-HT20 Ant 1	

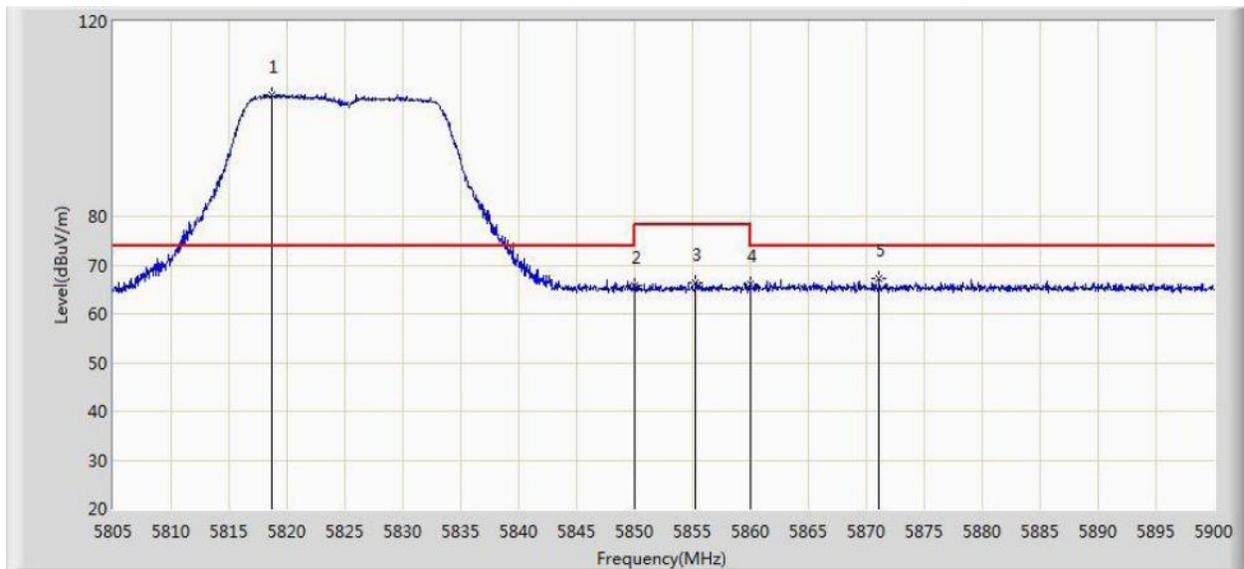


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.728	105.043	66.713	N/A	N/A	38.330	PK
2			5850.000	65.665	27.212	-12.535	78.200	38.454	PK
3			5855.255	66.449	27.983	-11.751	78.200	38.466	PK
4			5860.000	66.194	27.716	-7.806	74.000	38.478	PK
5			5871.120	67.362	28.869	-6.638	74.000	38.493	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 09:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5825MHz by 802.11n-HT20 Ant 1	

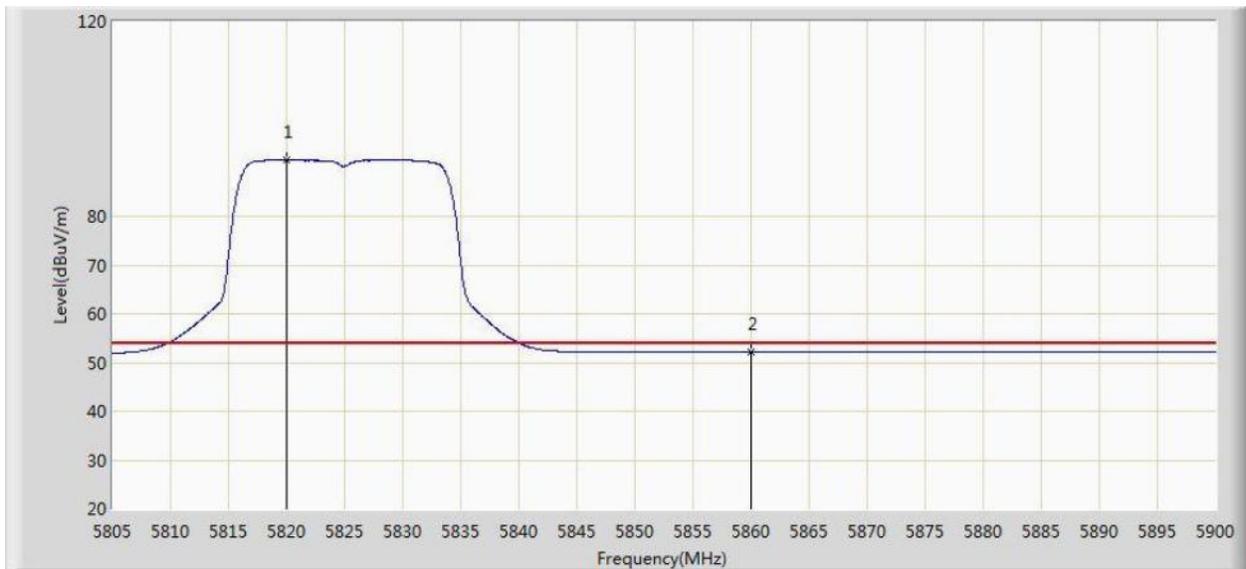


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.962	91.599	53.264	N/A	N/A	38.335	AV
3			5860.000	52.120	13.642	-1.880	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5825MHz by 802.11n-HT20 Ant 1	

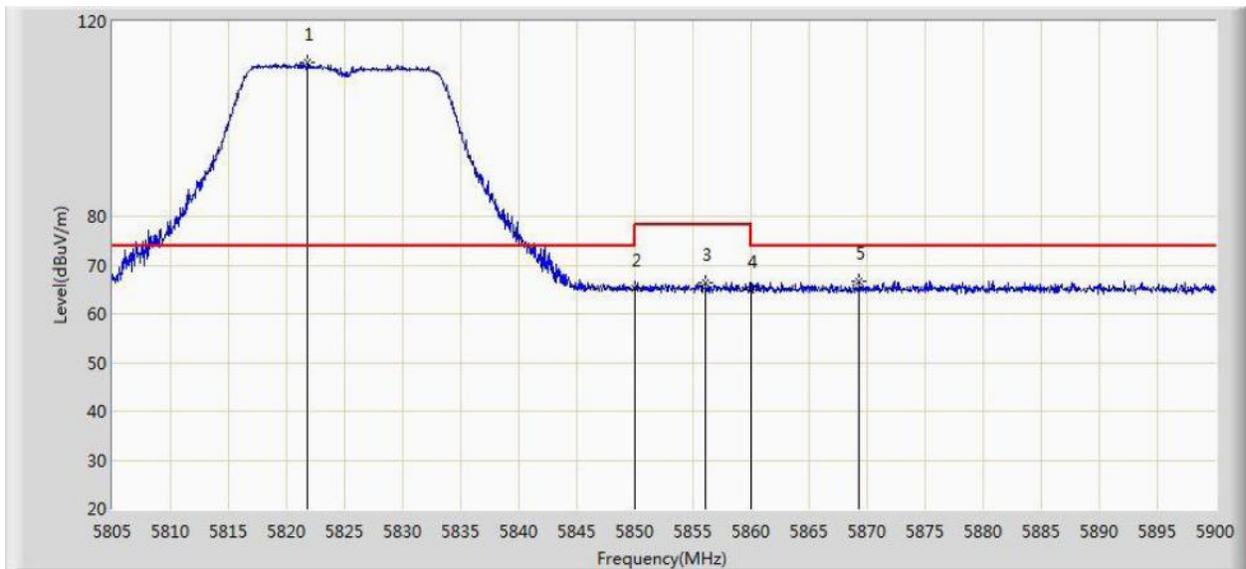


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5821.768	111.713	73.371	N/A	N/A	38.342	PK
2			5850.000	65.205	26.752	-12.995	78.200	38.454	PK
3			5856.110	66.401	27.933	-11.799	78.200	38.468	PK
4			5860.000	64.869	26.391	-9.131	74.000	38.478	PK
5			5869.315	66.810	28.319	-7.190	74.000	38.490	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 2: Transmit at channel 5825MHz by 802.11n-HT20 Ant 1	

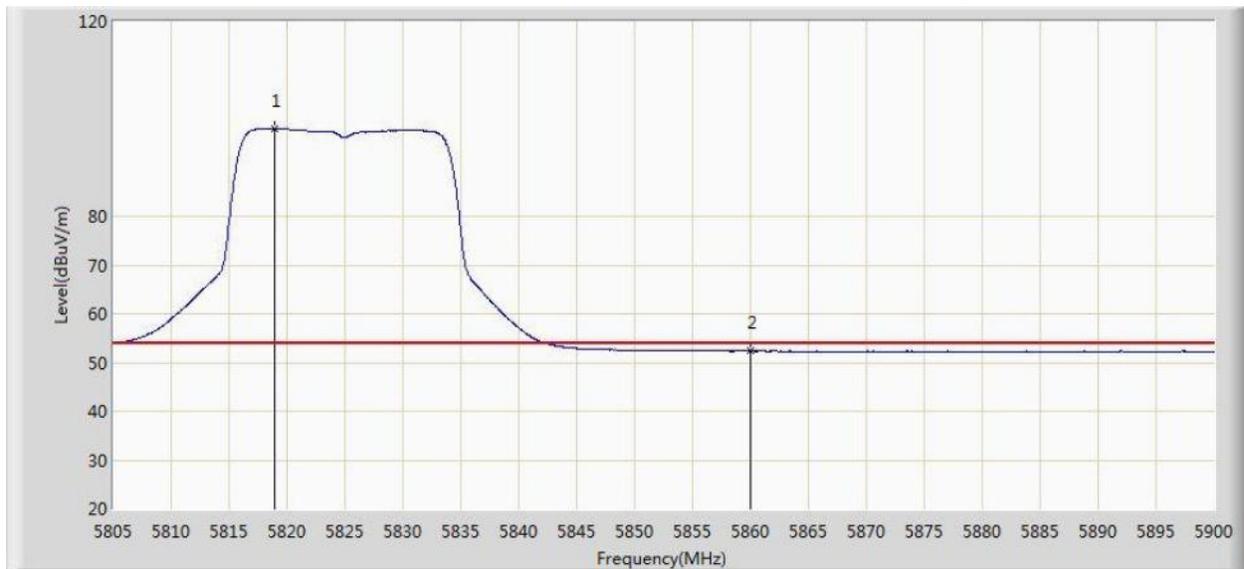


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5818.965	98.020	59.689	N/A	N/A	38.330	AV
3			5860.000	52.322	13.844	-1.678	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5190MHz by 802.11n-HT40 Ant 1	

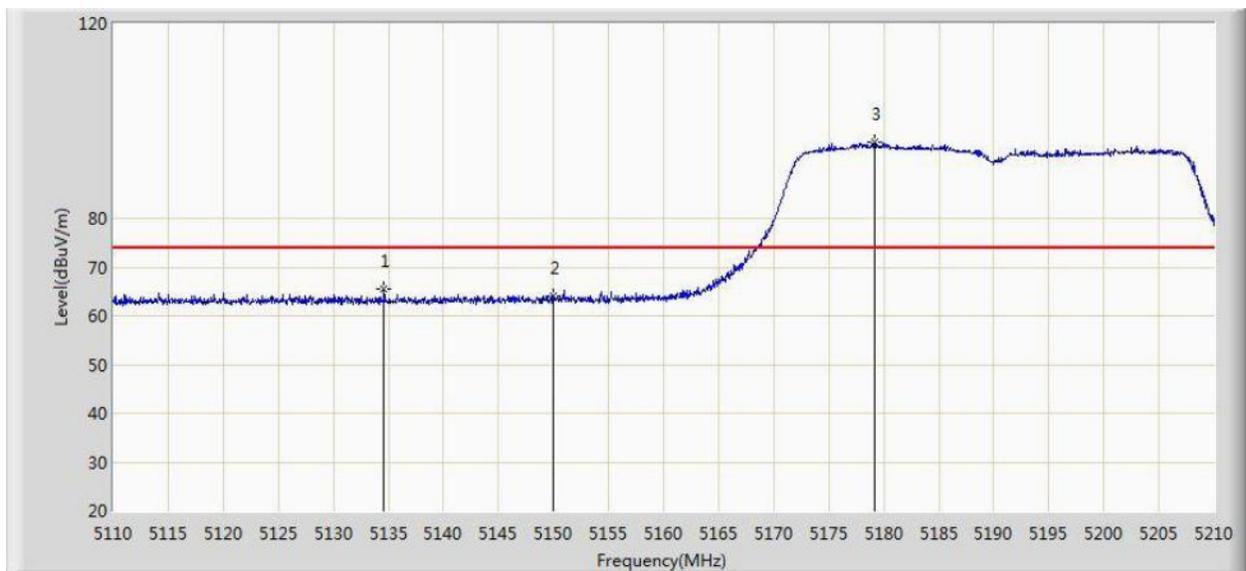


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5134.600	65.425	27.950	-8.575	74.000	37.475	PK
2			5150.000	64.014	26.562	-9.986	74.000	37.452	PK
3		*	5179.150	95.526	58.150	N/A	N/A	37.376	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5190MHz by 802.11n-HT40 Ant 1	

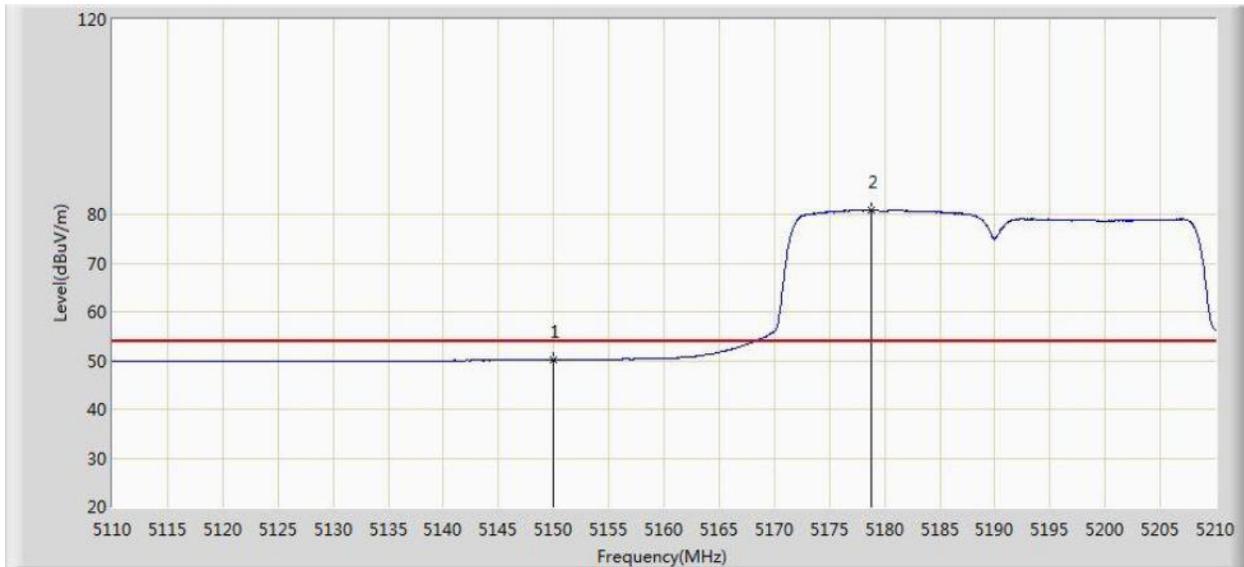


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.168	12.716	-3.832	54.000	37.452	AV
2		*	5178.850	80.940	43.564	N/A	N/A	37.376	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5190MHz by 802.11n-HT40 Ant 1	

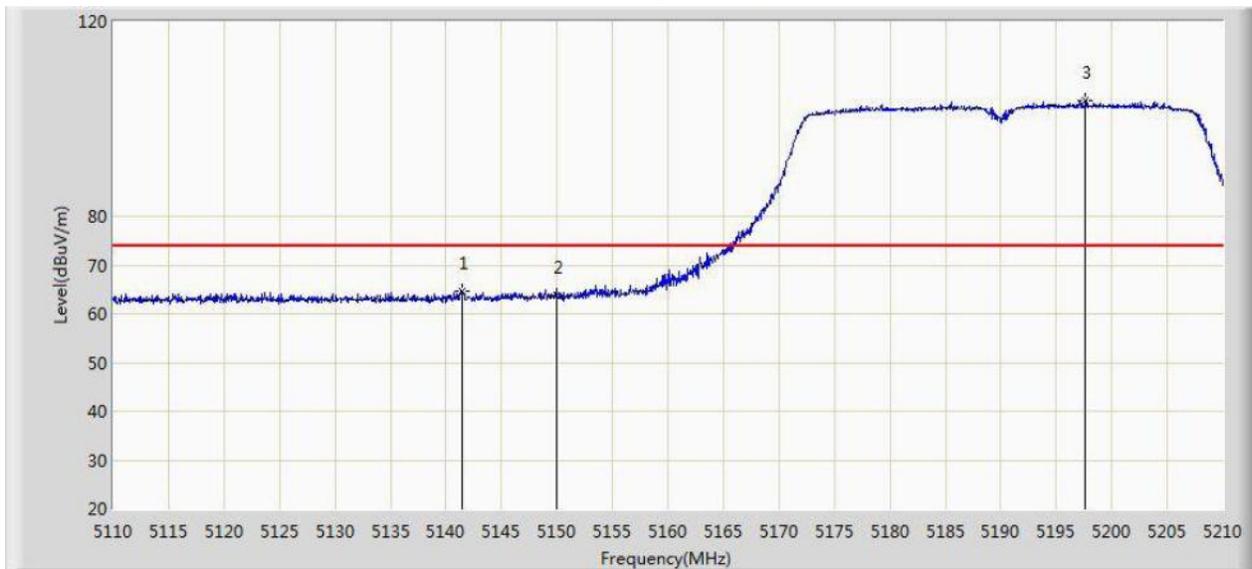


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5141.400	64.637	27.172	-9.363	74.000	37.465	PK
2			5150.000	63.821	26.369	-10.179	74.000	37.452	PK
3		*	5197.650	103.789	66.458	N/A	N/A	37.331	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5190MHz by 802.11n-HT40 Ant 1	

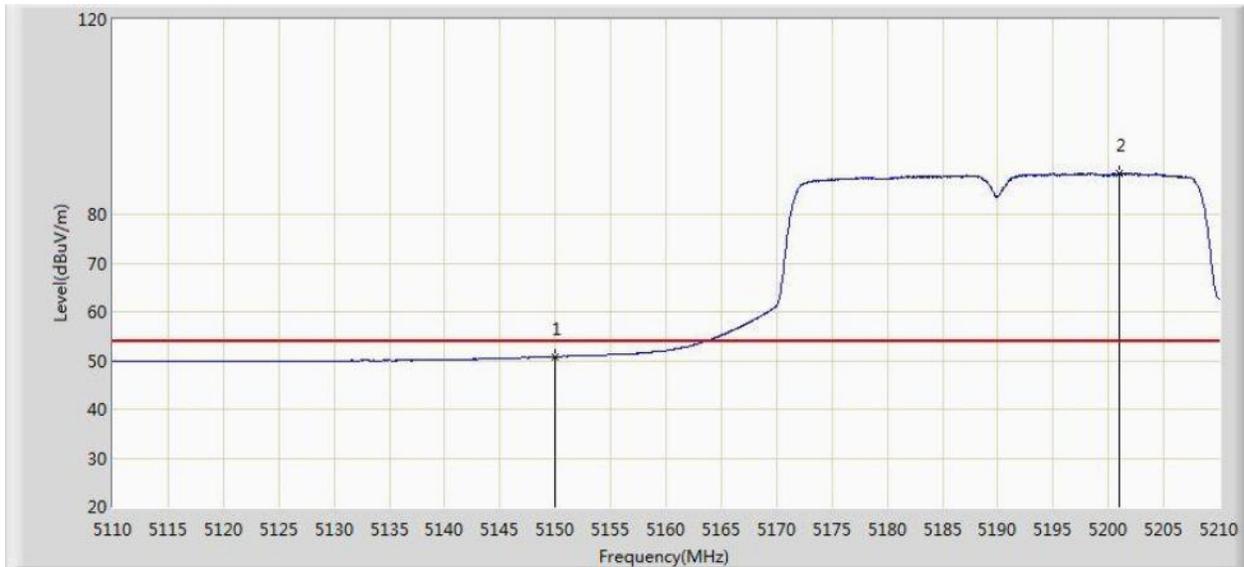


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.805	13.353	-3.195	54.000	37.452	AV
2		*	5200.950	88.277	50.956	N/A	N/A	37.321	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 09:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5310MHz by 802.11n-HT40 Ant 1	

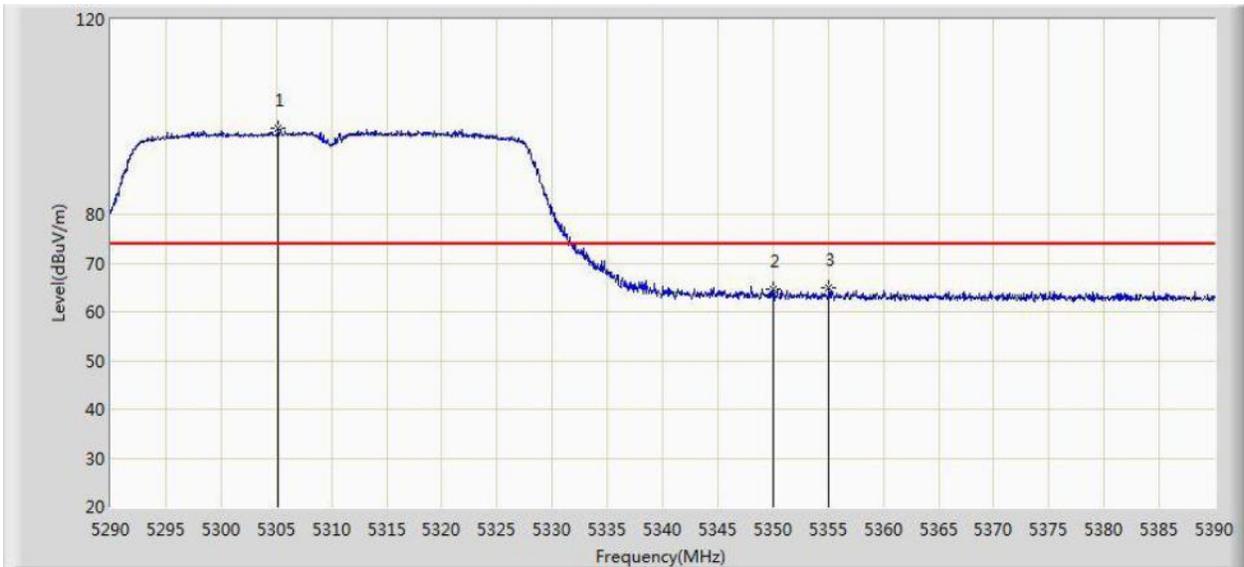


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.200	97.783	60.591	N/A	N/A	37.192	PK
2			5350.000	64.494	27.208	-9.506	74.000	37.286	PK
3			5355.100	64.957	27.656	-9.043	74.000	37.301	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 09:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5310MHz by 802.11n-HT40 Ant 1	

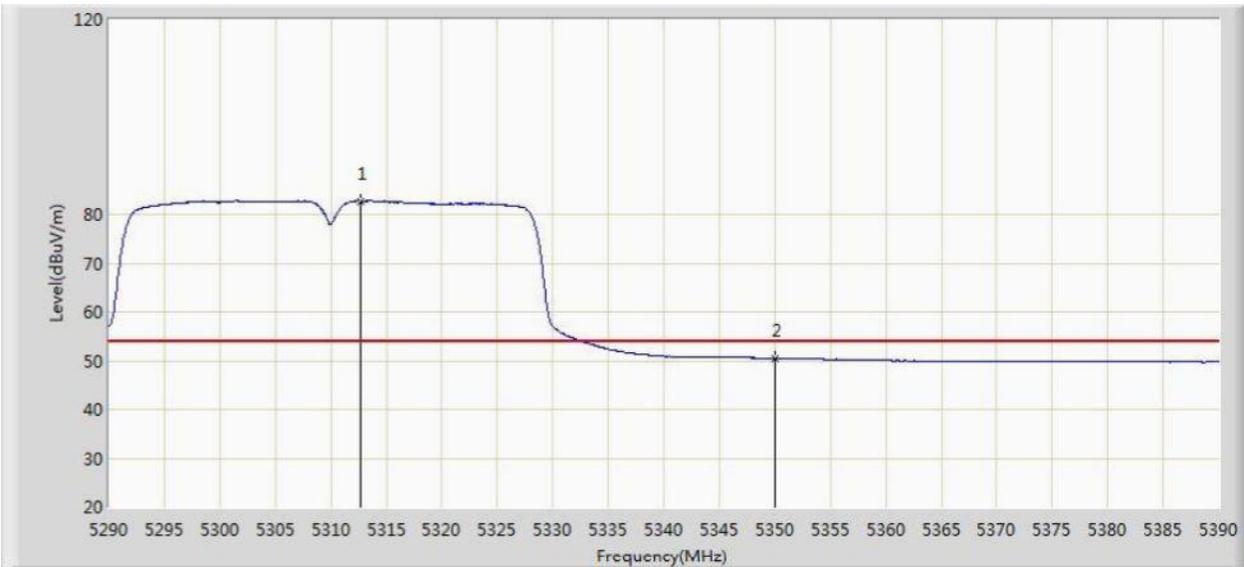


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.650	82.743	45.542	N/A	N/A	37.201	AV
2			5350.000	50.452	13.166	-3.548	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 09:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5310MHz by 802.11n-HT40 Ant 1	

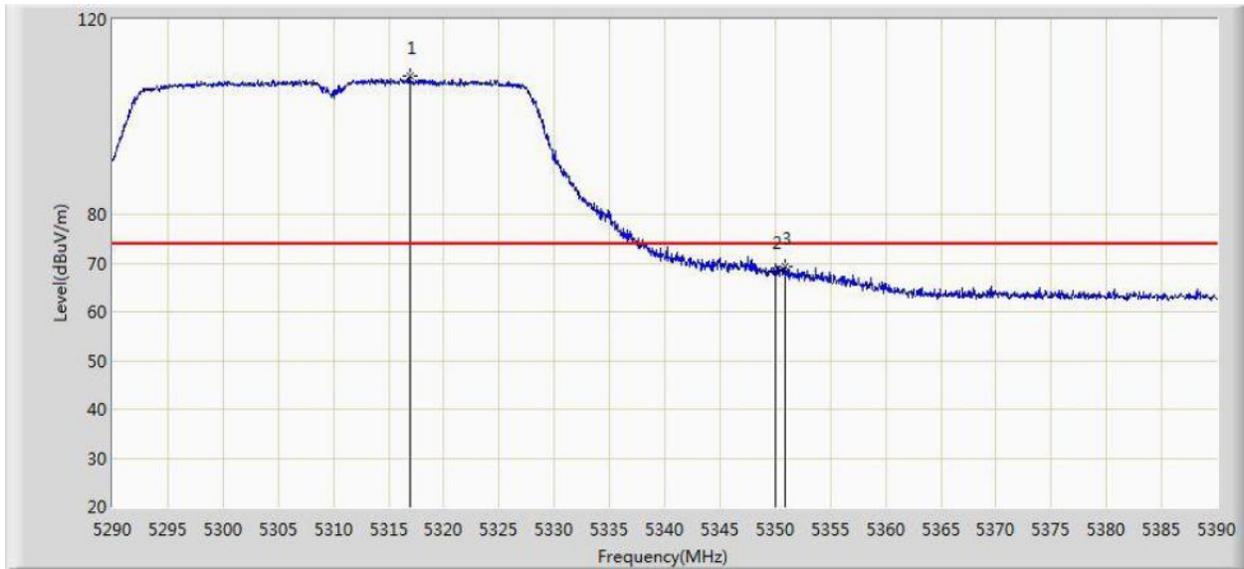


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5316.900	108.400	71.192	N/A	N/A	37.208	PK
2			5350.000	68.460	31.174	-5.540	74.000	37.286	PK
3			5350.900	69.134	31.845	-4.866	74.000	37.290	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5310MHz by 802.11n-HT40 Ant 0 Power=19	

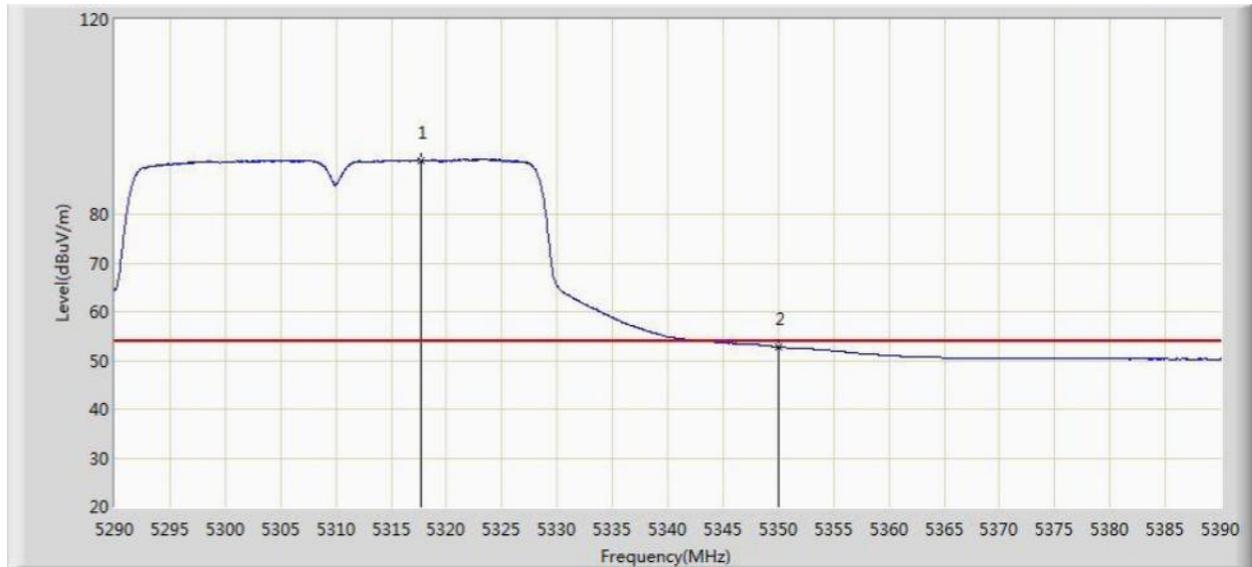


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.650	90.998	53.789	N/A	N/A	37.210	AV
2			5350.000	52.767	15.481	-1.233	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5510MHz by 802.11n-HT40 Ant 1	

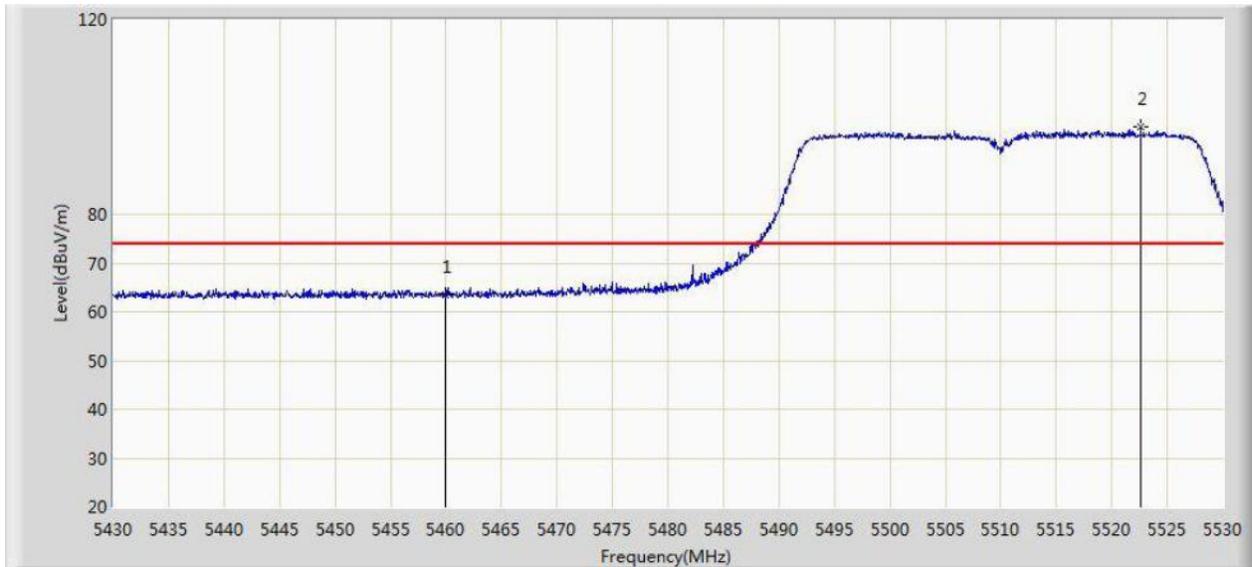


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	63.431	25.868	-10.569	74.000	37.563	PK
2		*	5522.600	97.900	60.250	N/A	N/A	37.651	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5510MHz by 802.11n-HT40 Ant 1	

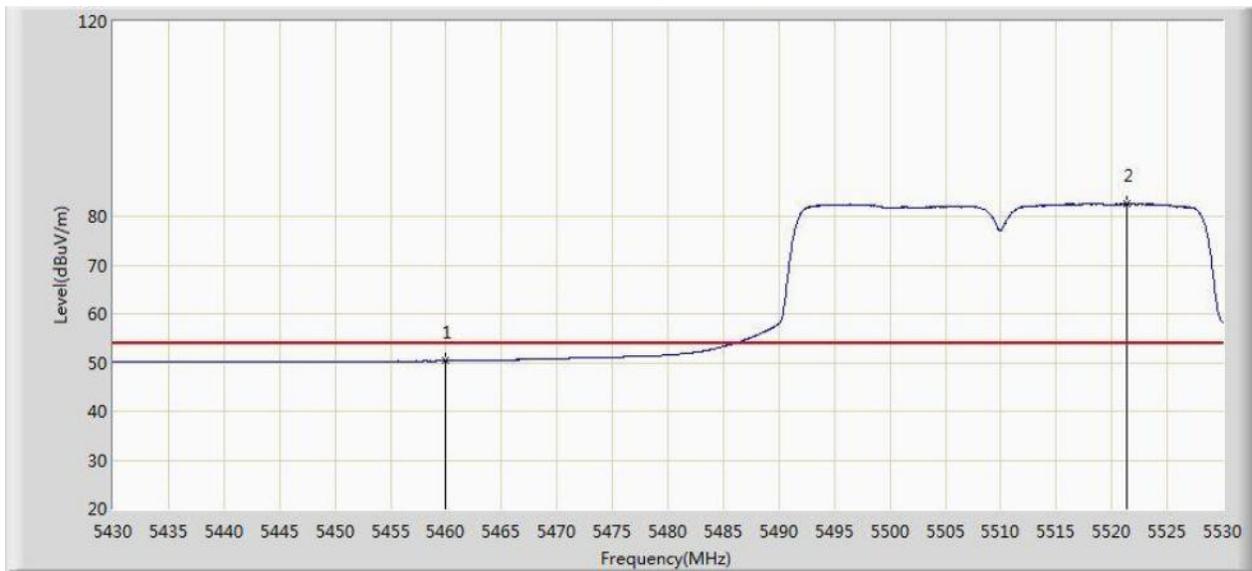


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.348	12.785	-3.652	54.000	37.563	AV
2		*	5521.350	82.589	44.941	N/A	N/A	37.648	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5510MHz by 802.11n-HT40 Ant 1	

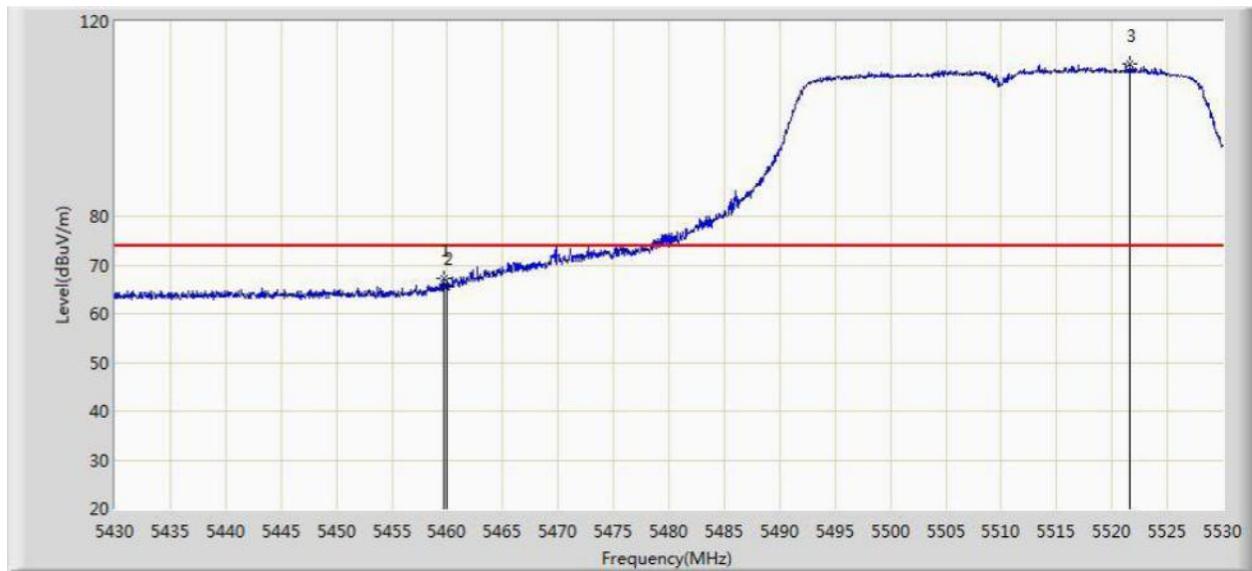


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.700	67.164	29.602	-6.836	74.000	37.562	PK
2			5460.000	65.531	27.968	-8.469	74.000	37.563	PK
3		*	5521.600	111.221	73.572	N/A	N/A	37.649	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5510MHz by 802.11n-HT40 Ant 1	

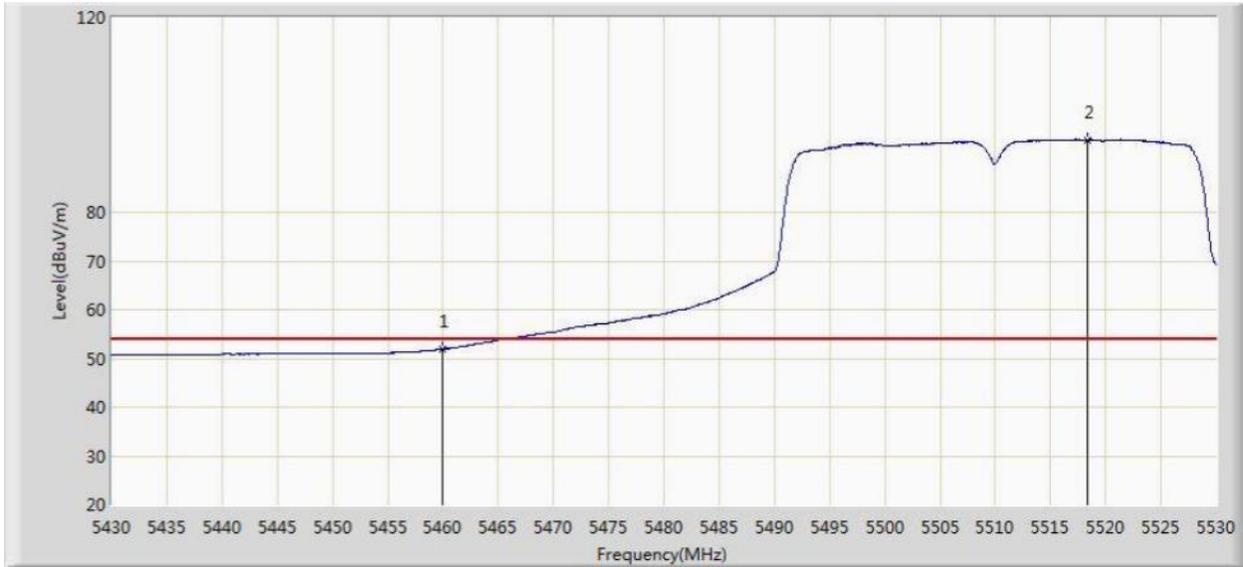


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.954	14.391	-2.046	54.000	37.563	AV
2		*	5518.300	94.825	57.180	N/A	N/A	37.645	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5670MHz by 802.11n-HT40 Ant 1	

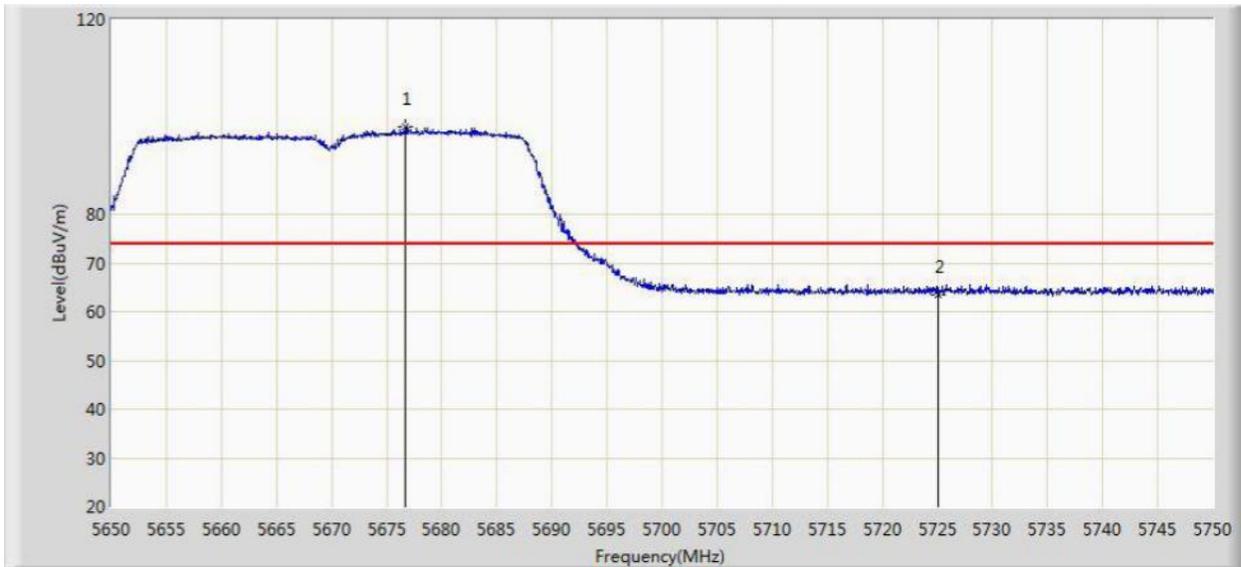


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.650	97.956	60.135	N/A	N/A	37.821	PK
2			5725.000	63.463	25.473	-10.537	74.000	37.990	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5670MHz by 802.11n-HT40 Ant 1	

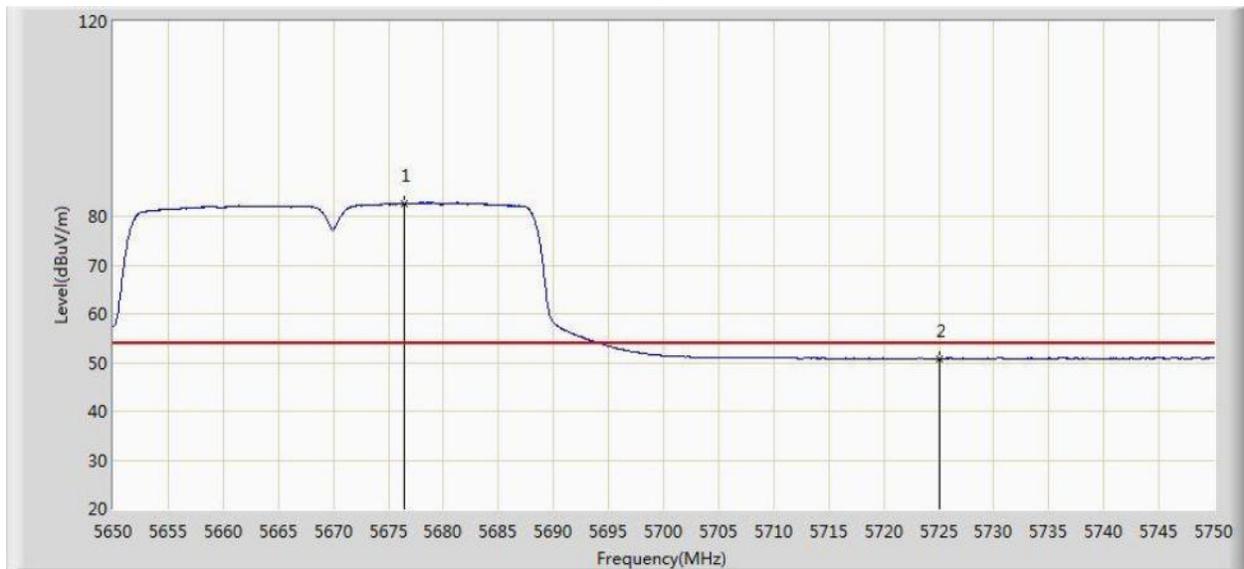


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5676.400	82.631	44.811	N/A	N/A	37.820	AV
2			5725.000	50.791	12.801	-3.209	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5670MHz by 802.11n-HT40 Ant 1	

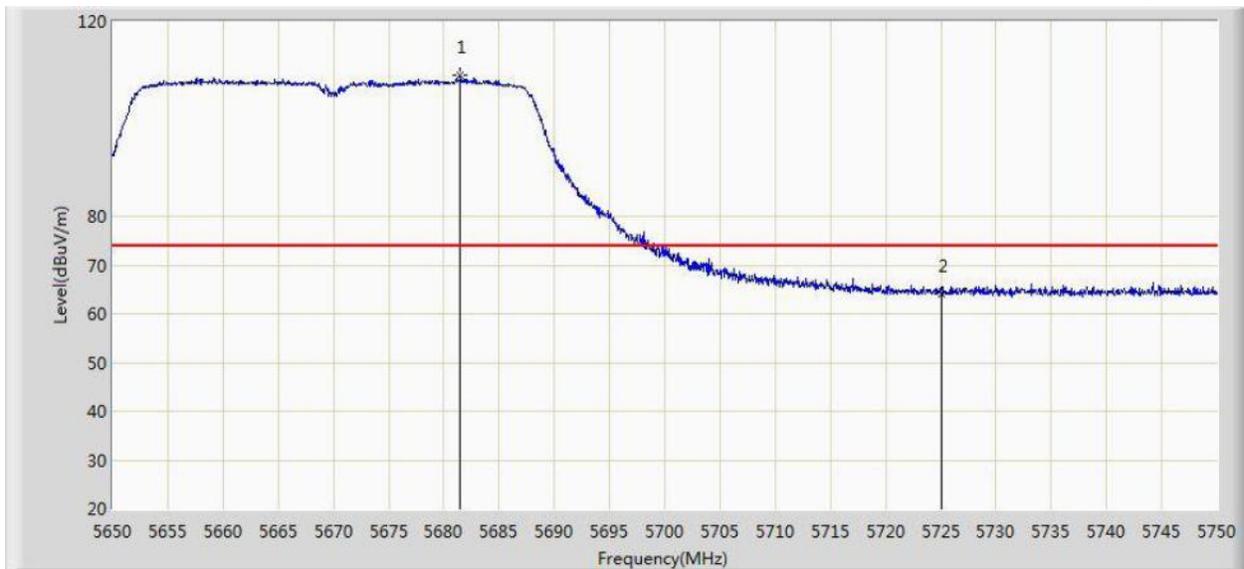


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5681.500	108.916	71.080	N/A	N/A	37.836	PK
2			5725.000	64.046	26.056	-9.954	74.000	37.990	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5670MHz by 802.11n-HT40 Ant 1	

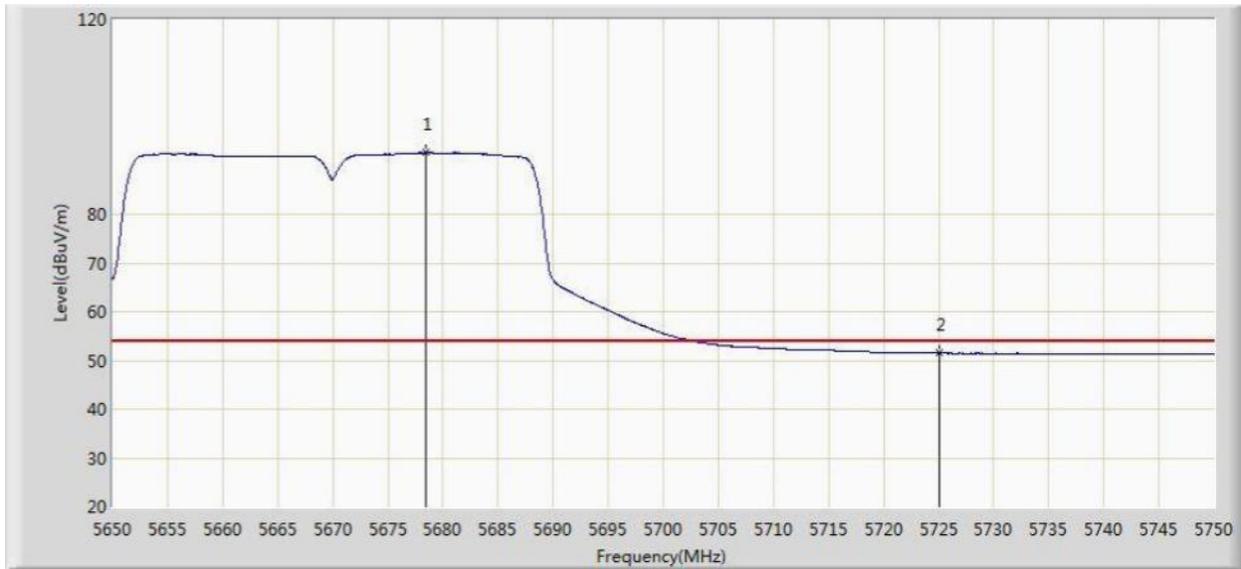


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5678.400	92.612	54.785	N/A	N/A	37.826	AV
2			5725.000	51.488	13.498	-2.512	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5755MHz by 802.11n-HT40 Ant 1	

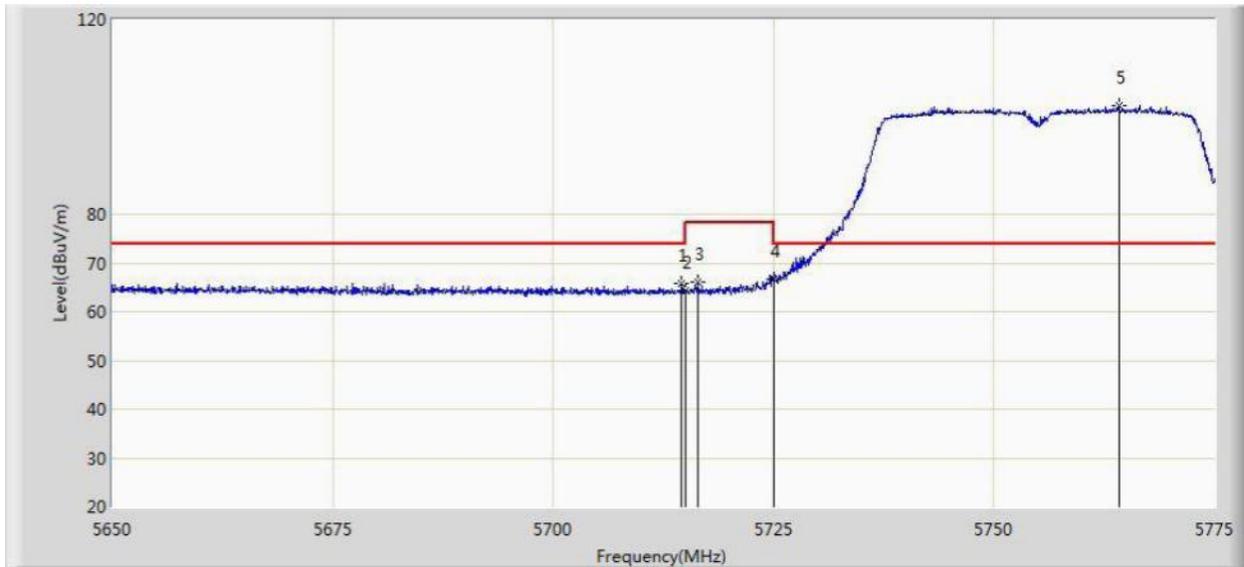


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.562	65.850	27.903	-8.150	74.000	37.947	PK
2			5715.000	64.401	26.452	-9.599	74.000	37.949	PK
3			5716.375	65.943	27.988	-12.257	78.200	37.955	PK
4			5725.000	66.751	28.761	-11.449	78.200	37.990	PK
5		*	5764.125	102.265	64.114	N/A	N/A	38.151	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5755MHz by 802.11n-HT40 Ant 1	

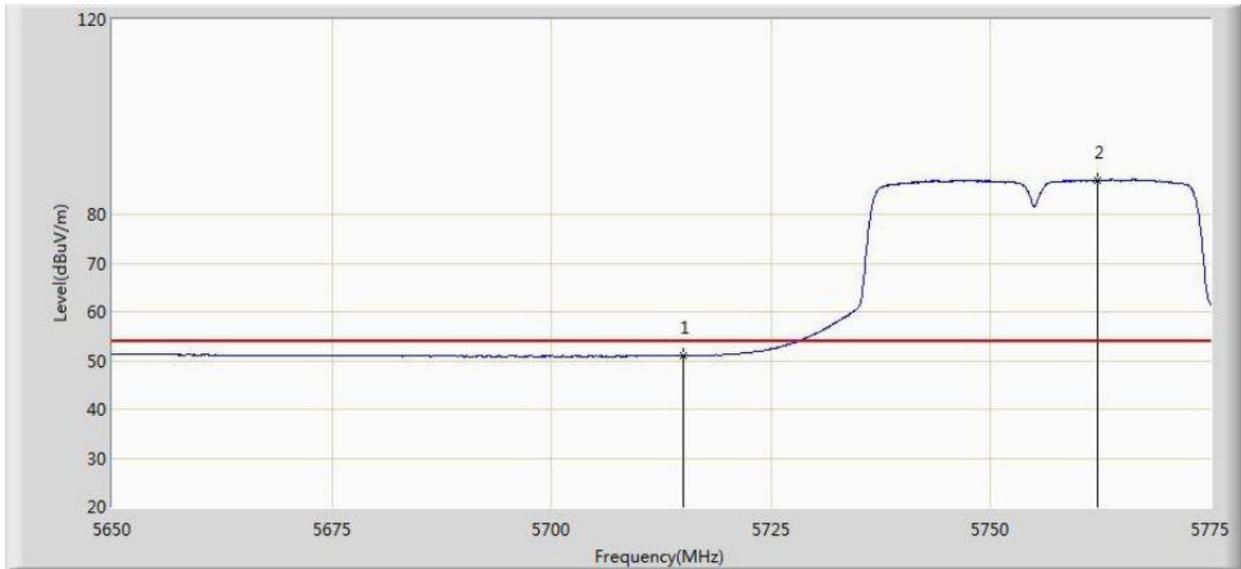


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.980	13.031	-3.020	54.000	37.949	AV
2		*	5762.125	86.940	48.794	N/A	N/A	38.146	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5755MHz by 802.11n-HT40 Ant 1	

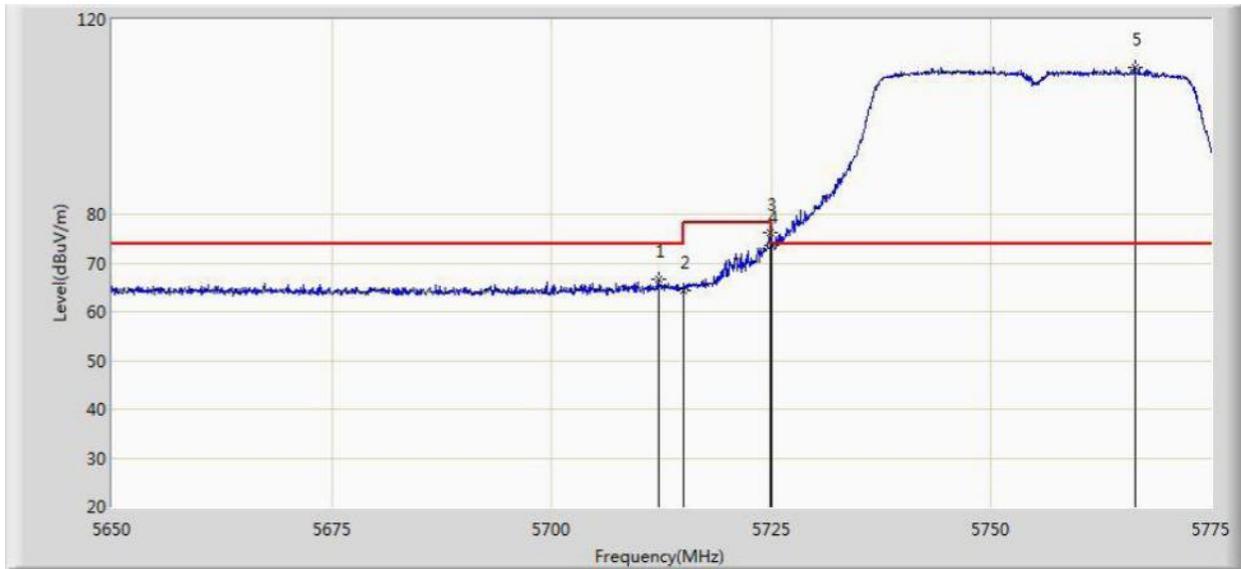


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5712.125	66.627	28.689	-7.373	74.000	37.938	PK
2			5715.000	64.456	26.507	-9.544	74.000	37.949	PK
3			5724.937	76.164	38.175	-2.036	78.200	37.990	PK
4			5725.000	73.612	35.622	-4.588	78.200	37.990	PK
5		*	5766.375	110.103	71.946	N/A	N/A	38.157	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5755MHz by 802.11n-HT40 Ant 1	

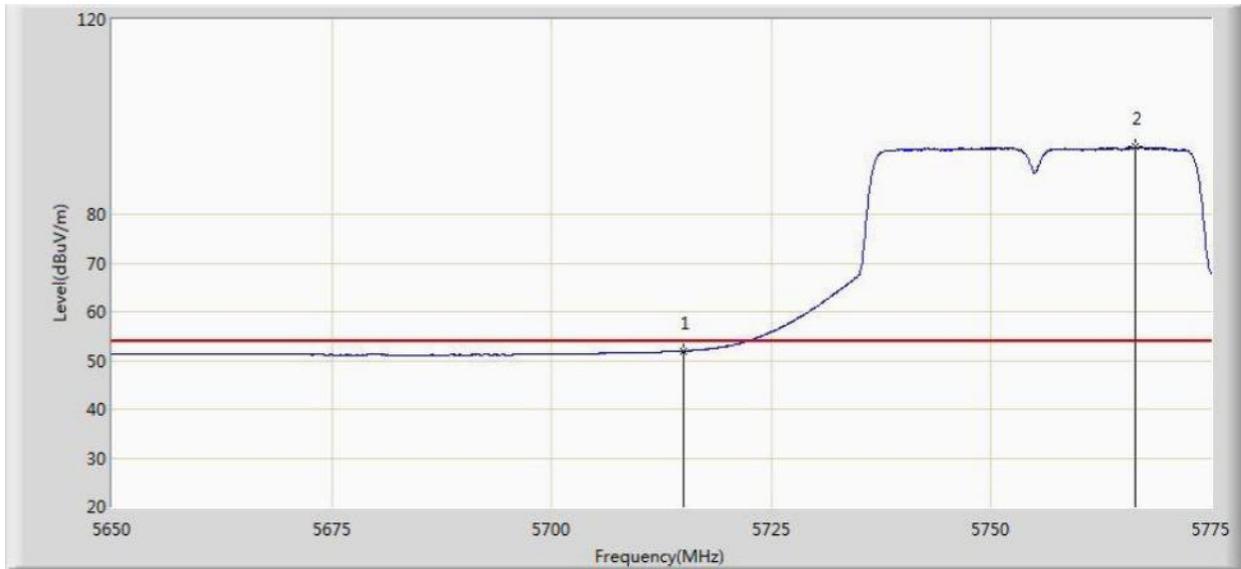


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.945	13.996	-2.055	54.000	37.949	AV
2		*	5766.437	93.798	55.641	N/A	N/A	38.157	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:26
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5795MHz by 802.11n-HT40 Ant 1	

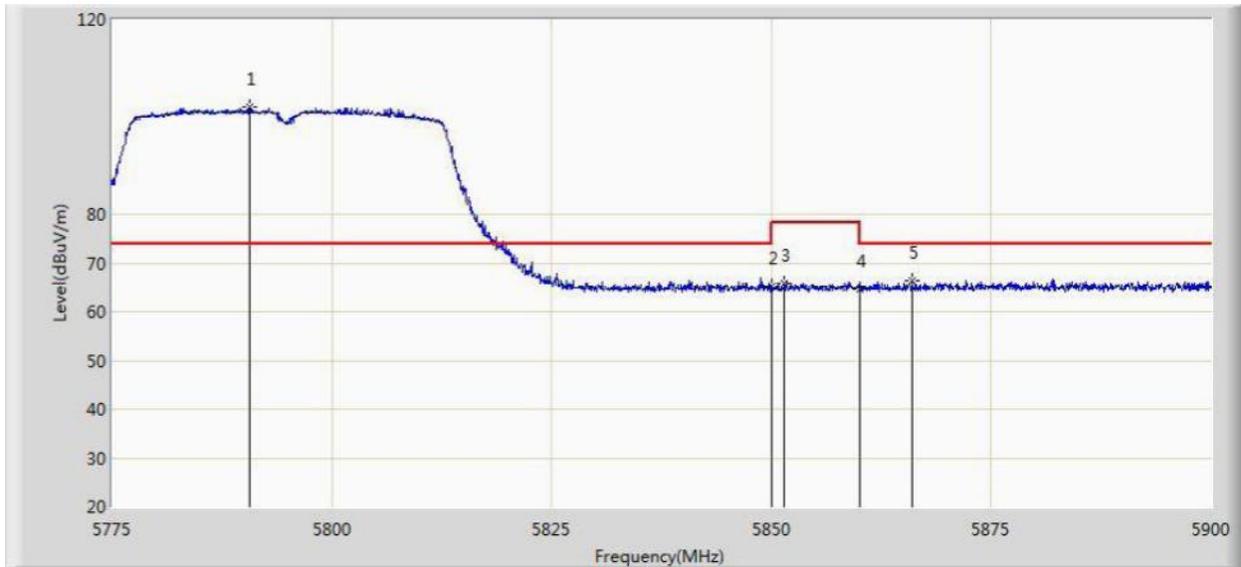


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5790.687	102.075	63.842	N/A	N/A	38.233	PK
2			5850.000	65.321	26.868	-12.879	78.200	38.454	PK
3			5851.500	65.819	27.362	-12.381	78.200	38.457	PK
4			5860.000	64.645	26.167	-9.355	74.000	38.478	PK
5			5866.000	66.471	27.984	-7.529	74.000	38.487	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5795MHz by 802.11n-HT40 Ant 1	

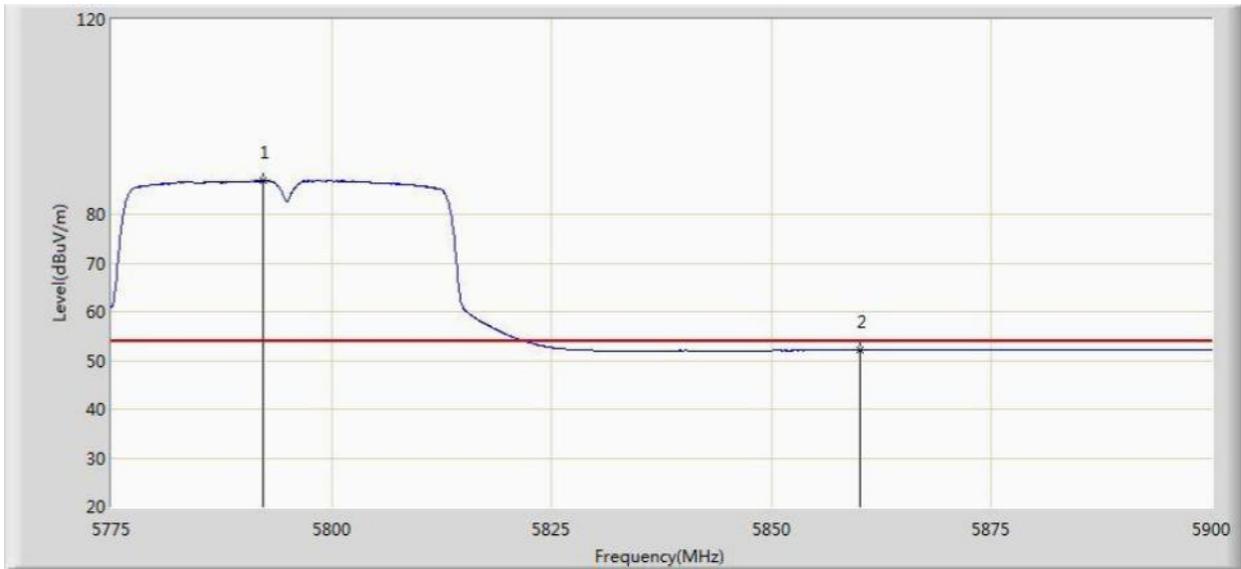


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5792.187	86.956	48.717	N/A	N/A	38.239	AV
2			5860.000	52.098	13.620	-1.902	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5795MHz by 802.11n-HT40 Ant 1	

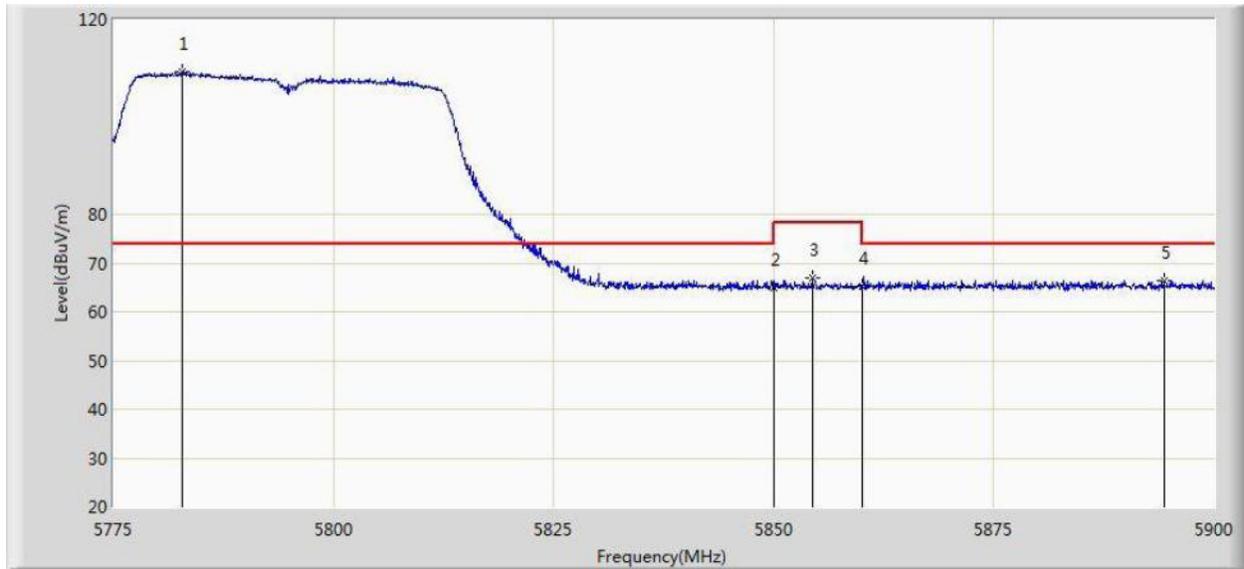


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5782.812	109.341	71.136	N/A	N/A	38.205	PK
2			5850.000	65.046	26.593	-13.154	78.200	38.454	PK
3			5854.375	66.948	28.484	-11.252	78.200	38.464	PK
4			5860.000	65.164	26.686	-8.836	74.000	38.478	PK
5			5894.375	66.501	27.989	-7.499	74.000	38.512	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 3: Transmit at channel 5795MHz by 802.11n-HT40 Ant 1	

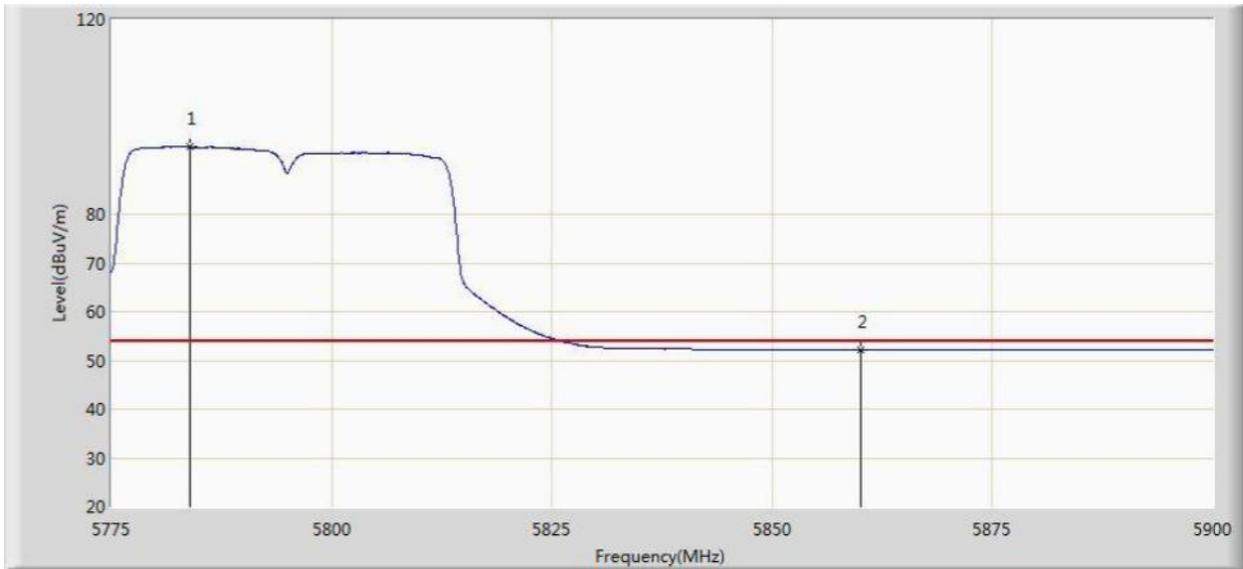


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5783.875	93.914	55.706	N/A	N/A	38.209	AV
2			5860.000	52.214	13.736	-1.786	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 10:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5180MHz by 802.11ac-VHT20 Ant 1	

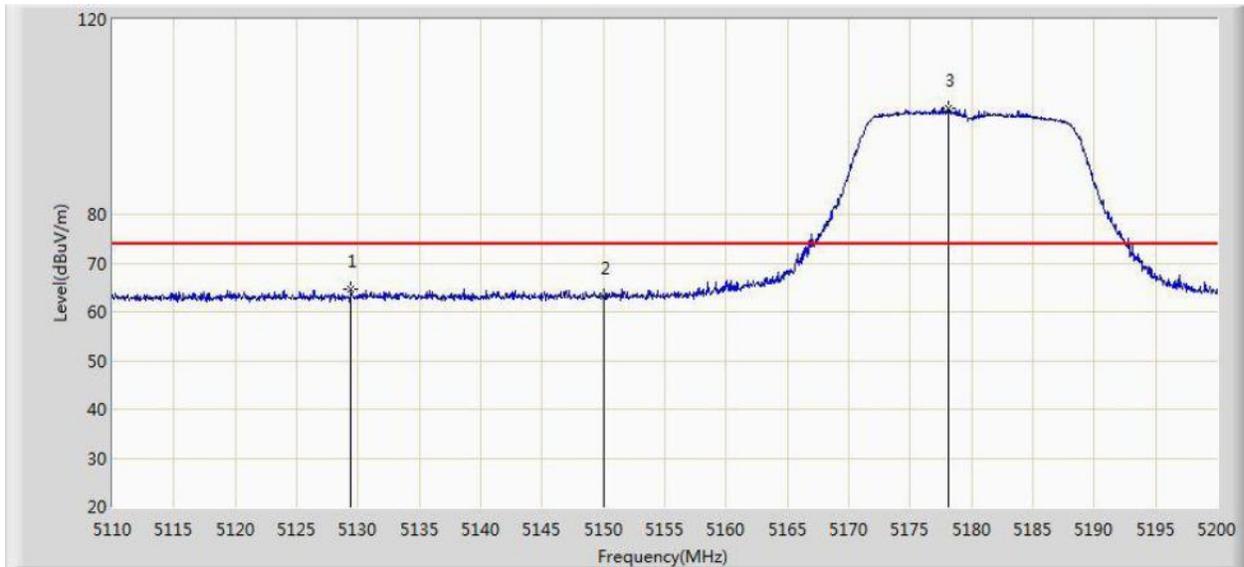


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5129.400	64.769	27.291	-9.231	74.000	37.479	PK
2			5150.000	63.140	25.688	-10.860	74.000	37.452	PK
3		*	5178.150	101.847	64.469	N/A	N/A	37.377	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5180MHz by 802.11ac-VHT20 Ant 1	

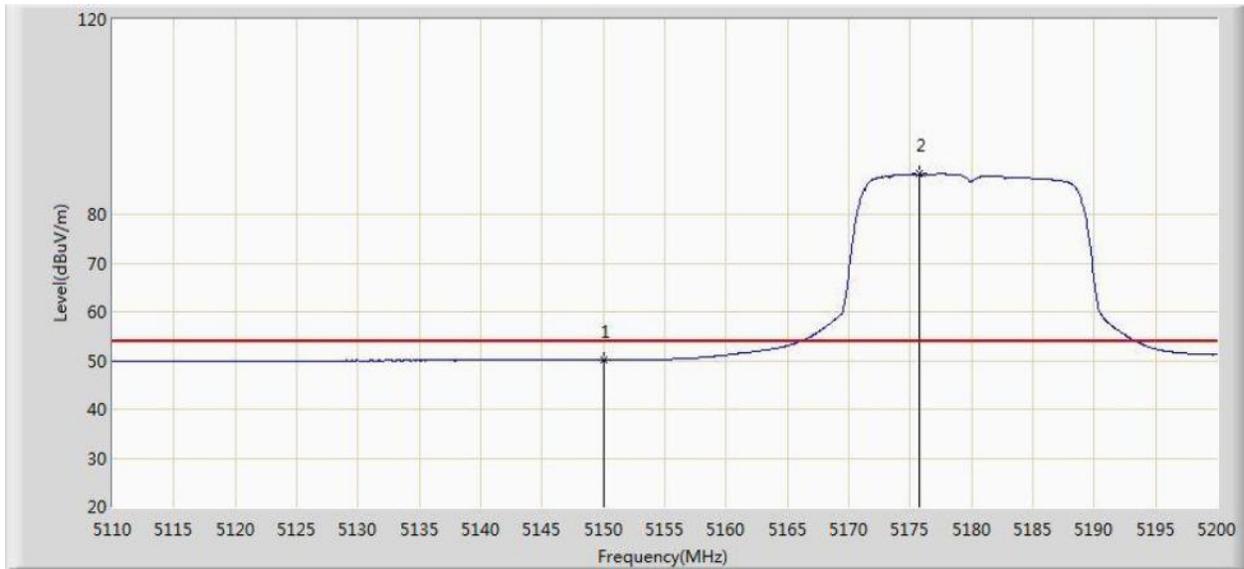


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.143	12.691	-3.857	54.000	37.452	AV
2		*	5175.750	88.290	50.907	N/A	N/A	37.384	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5180MHz by 802.11ac-VHT20 Ant 1	

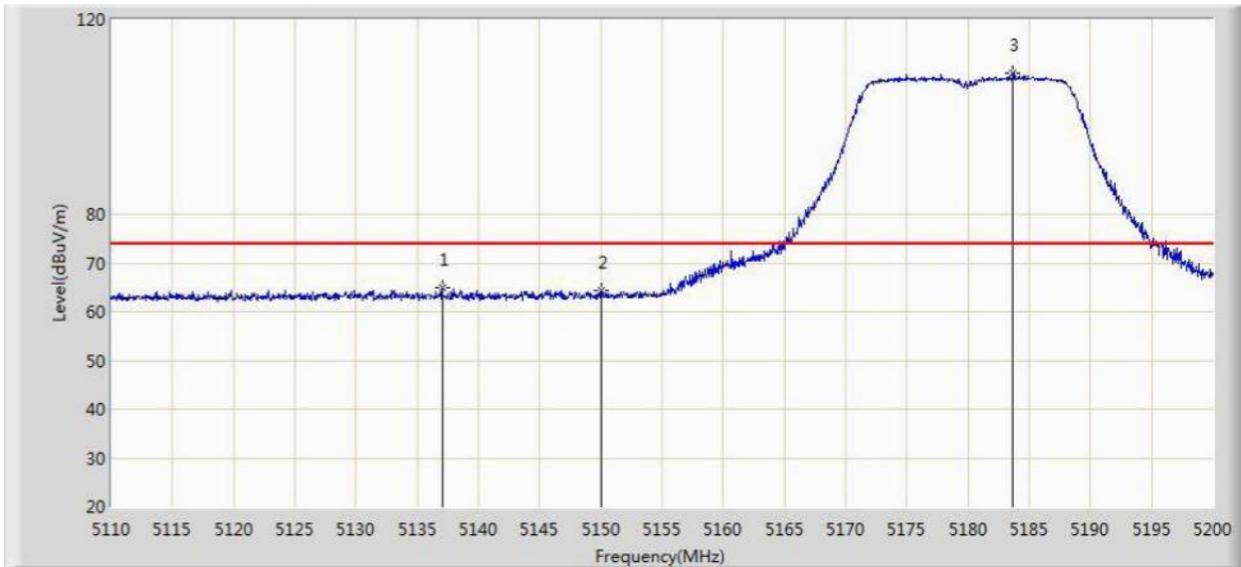


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.050	64.923	27.451	-9.077	74.000	37.472	PK
2			5150.000	64.346	26.894	-9.654	74.000	37.452	PK
3		*	5183.700	108.998	71.633	N/A	N/A	37.365	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode : Transmit at channel 5180MHz by 802.11ac-VHT20 Ant 1	

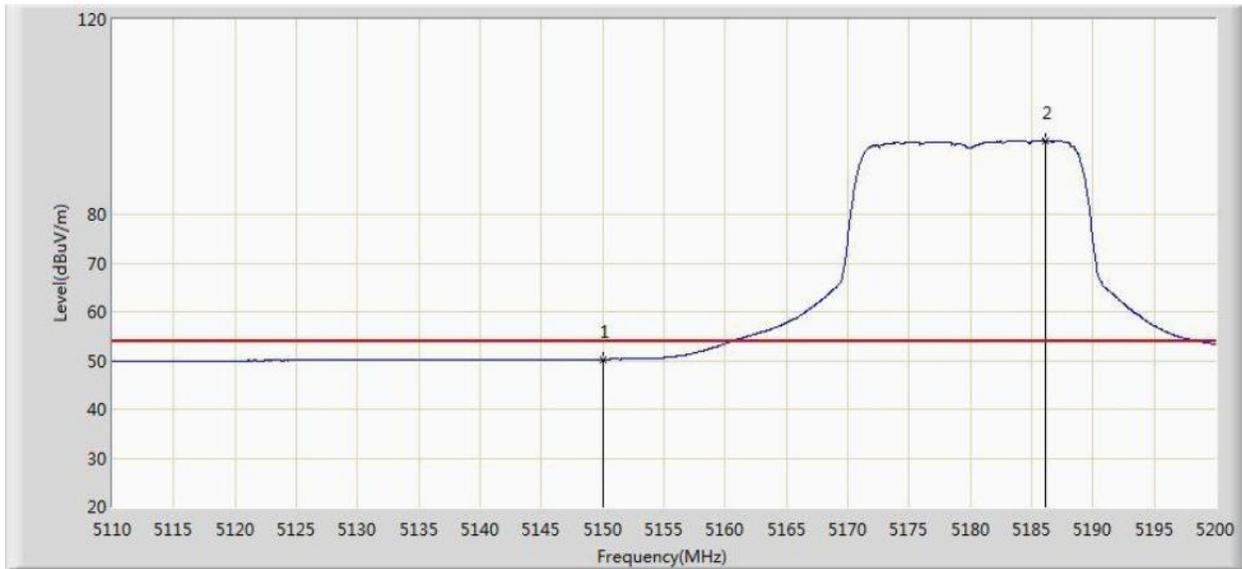


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.245	12.793	-3.755	54.000	37.452	AV
2		*	5186.150	95.125	57.766	N/A	N/A	37.359	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5320MHz by 802.11ac-VHT20 Ant 1	

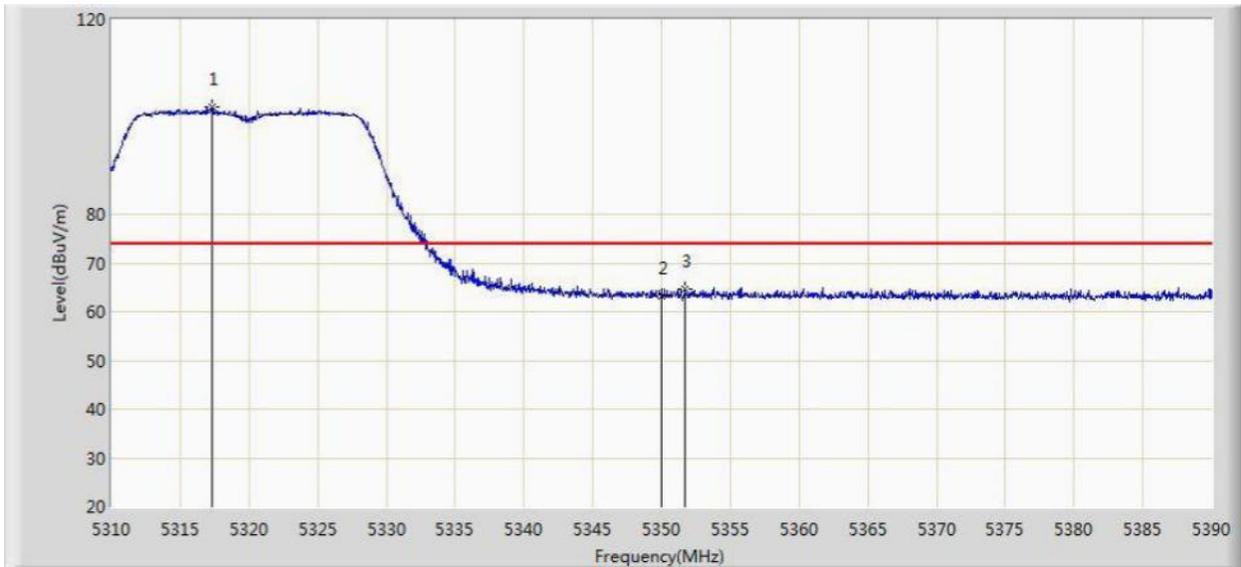


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.360	101.941	64.732	N/A	N/A	37.209	PK
2			5350.000	63.238	25.952	-10.762	74.000	37.286	PK
3			5351.720	64.704	27.412	-9.296	74.000	37.292	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5320MHz by 802.11ac-VHT20 Ant 1	

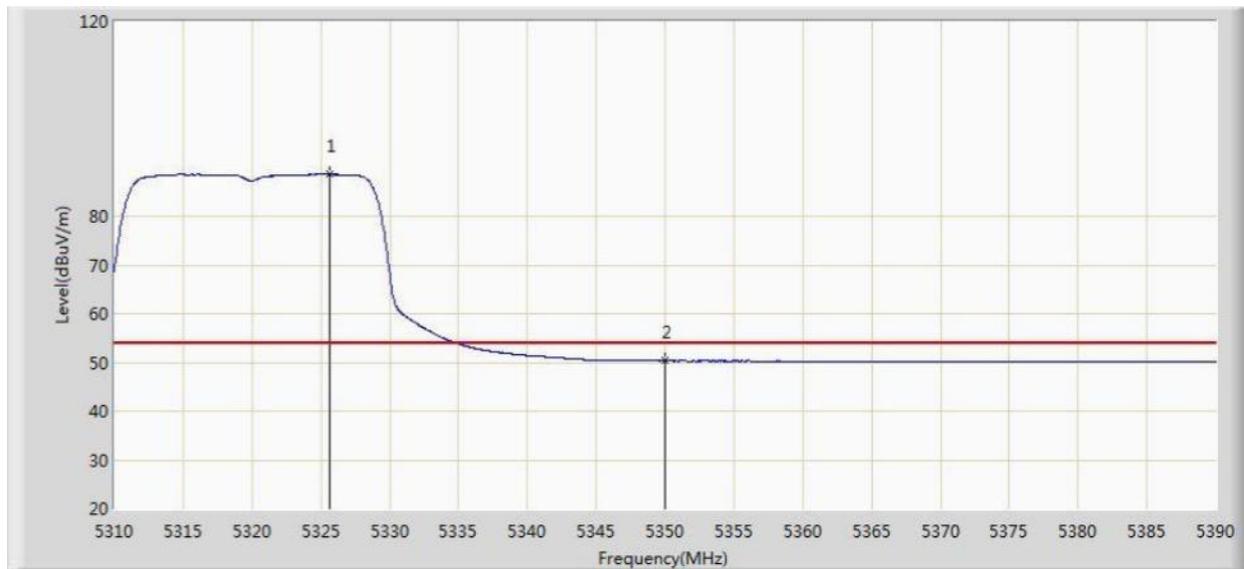


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5325.640	88.558	51.335	N/A	N/A	37.224	AV
2			5350.000	50.303	13.017	-3.697	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5320MHz by 802.11ac-VHT20 Ant 1	

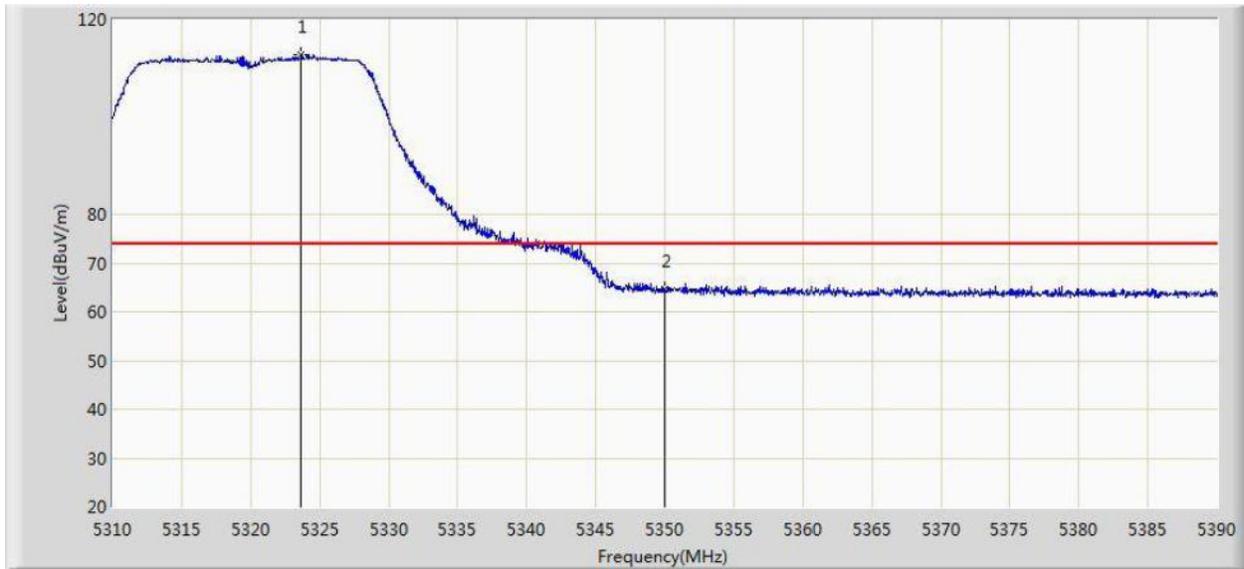


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.640	112.784	75.564	N/A	N/A	37.220	PK
2			5350.000	64.595	27.309	-9.405	74.000	37.286	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5320MHz by 802.11ac-VHT20 Ant 1	

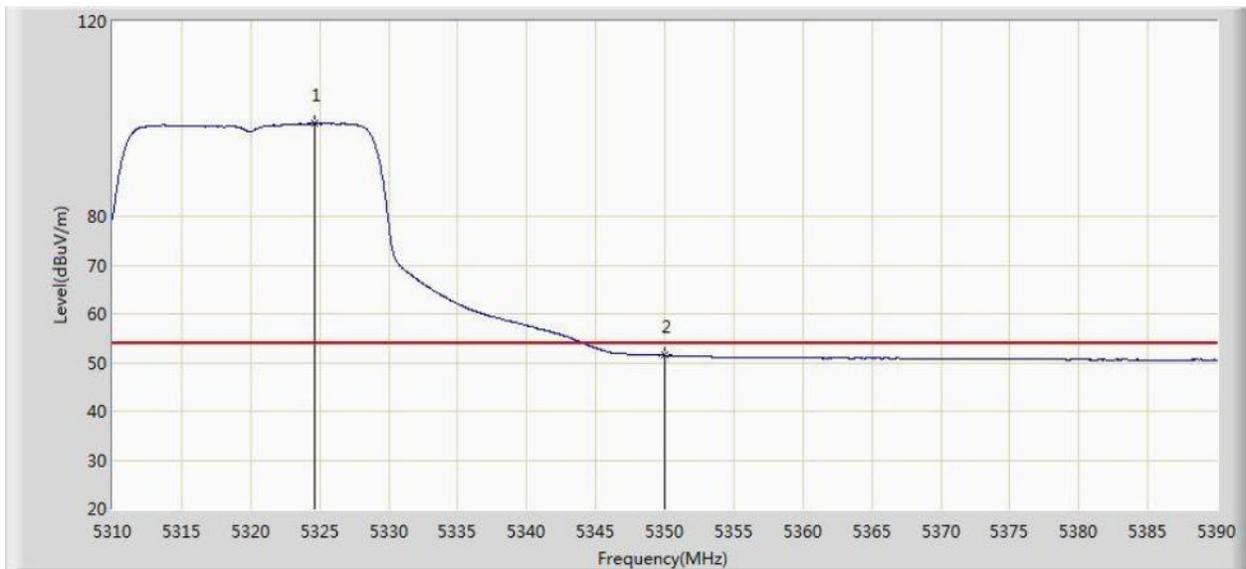


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5324.640	99.069	61.847	N/A	N/A	37.222	AV
2			5350.000	51.451	14.165	-2.549	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5500MHz by 802.11ac-VHT200 Ant 1	

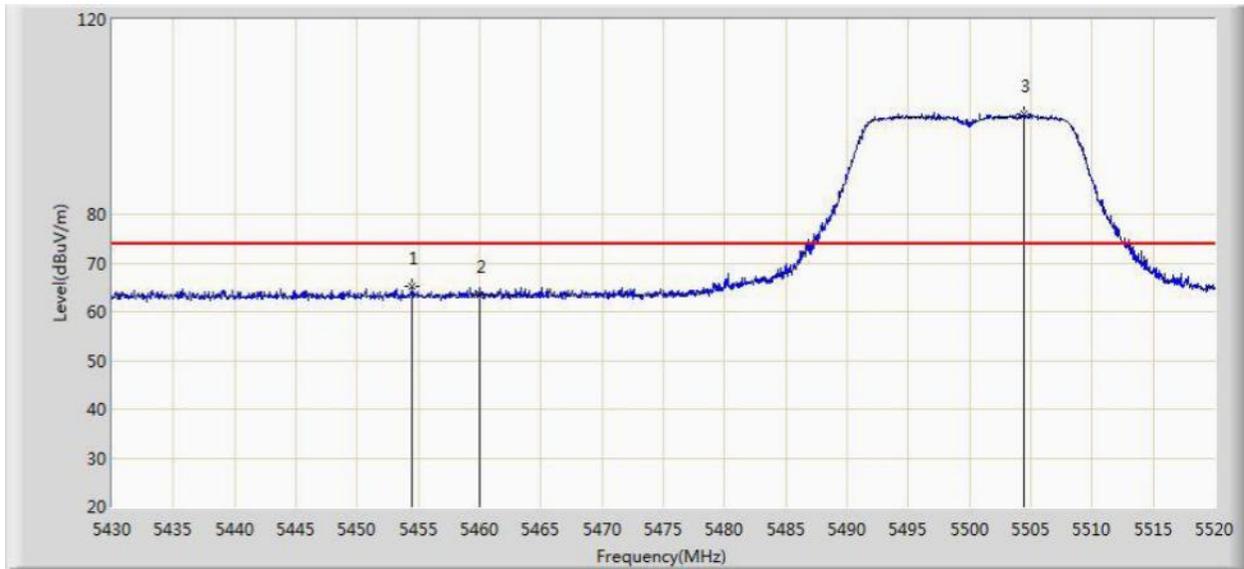


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5454.525	65.263	27.715	-8.737	74.000	37.548	PK
2			5460.000	63.394	25.831	-10.606	74.000	37.563	PK
3		*	5504.430	100.591	62.962	N/A	N/A	37.629	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5500MHz by 802.11ac-VHT200 Ant 1	

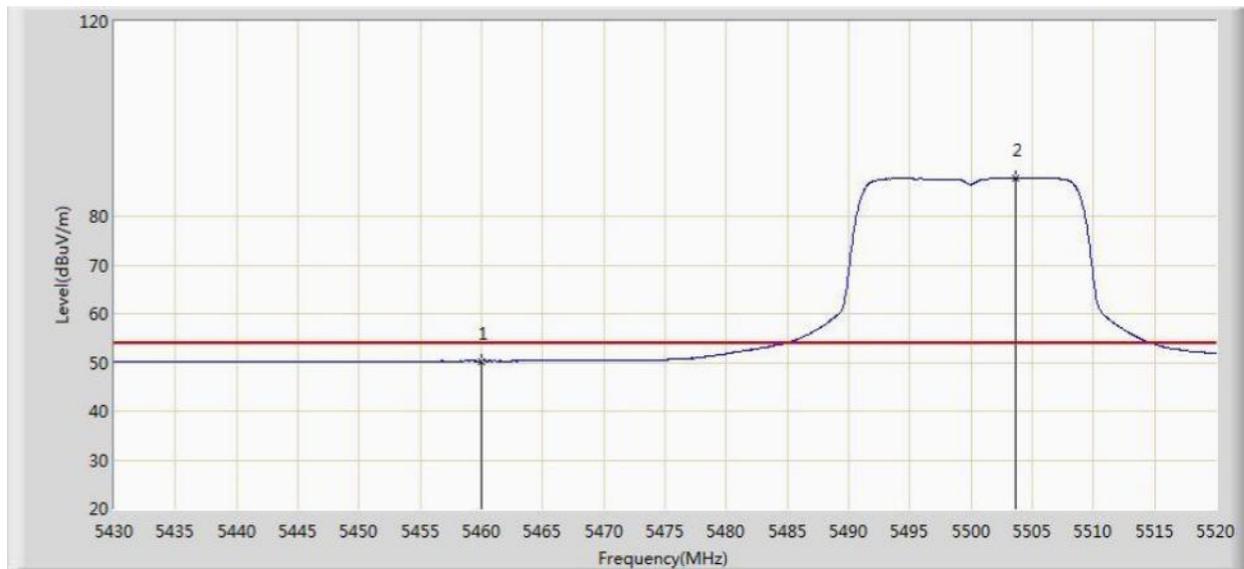


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.282	12.719	-3.718	54.000	37.563	AV
2		*	5503.620	87.875	50.247	N/A	N/A	37.628	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5500MHz by 802.11ac-VHT20 Ant 1	

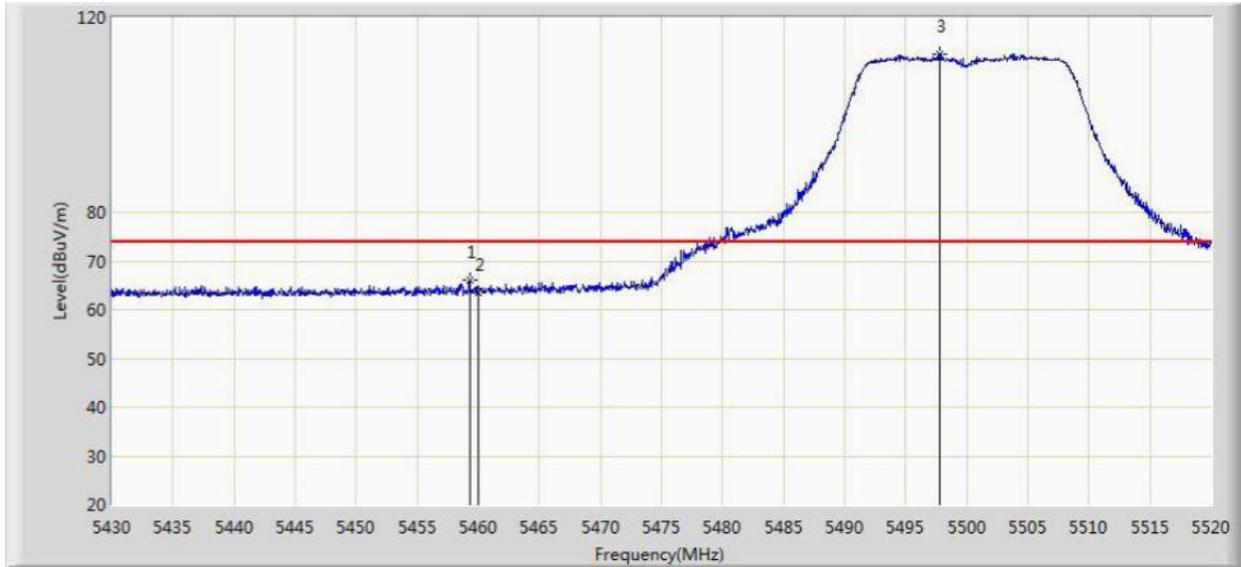


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.295	65.973	28.412	-8.027	74.000	37.560	PK
2			5460.000	63.615	26.052	-10.385	74.000	37.563	PK
3		*	5497.815	112.531	74.909	N/A	N/A	37.622	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5500MHz by 802.11ac-VHT20 Ant 1	

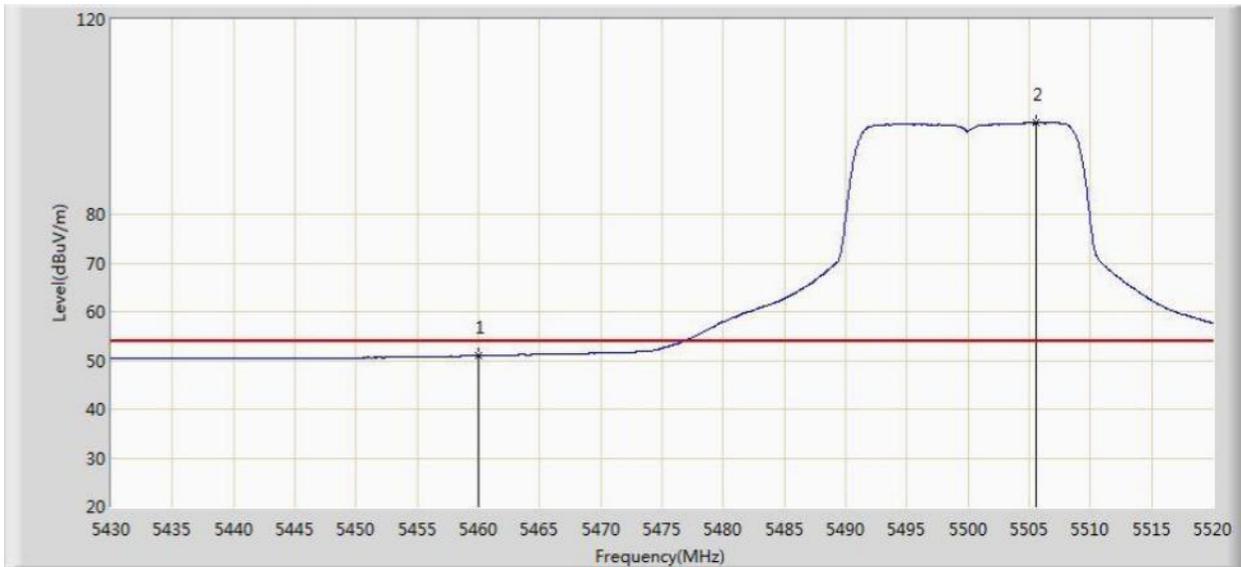


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.938	13.375	-3.062	54.000	37.563	AV
2		*	5505.555	98.786	61.156	N/A	N/A	37.630	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5700MHz by 802.11ac-VHT20 Ant 1	

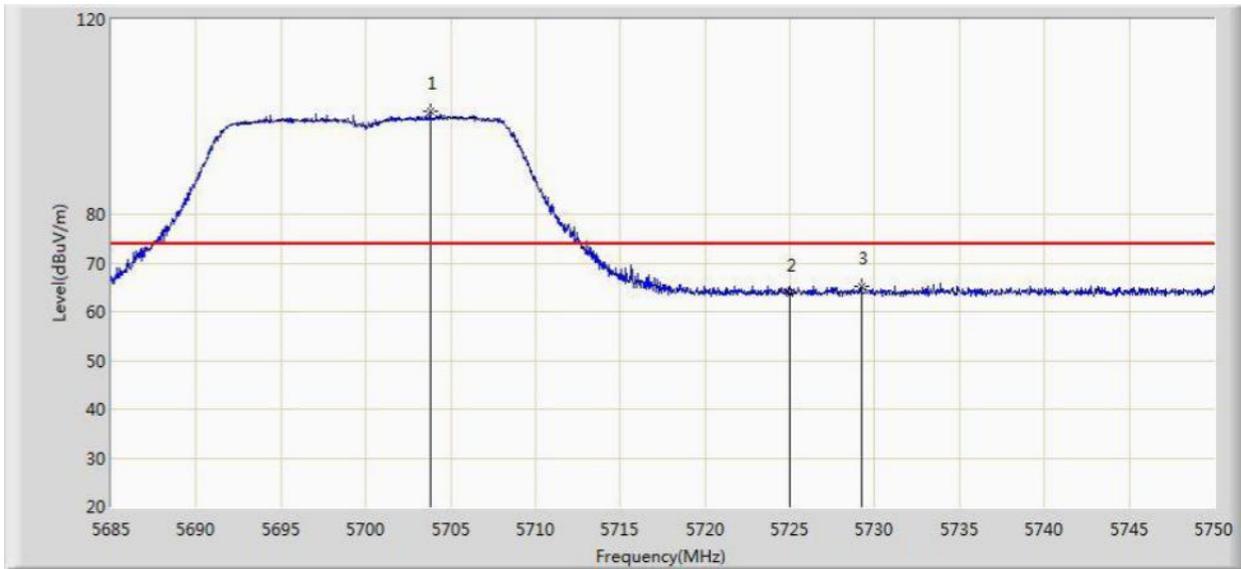


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5703.785	101.281	63.378	N/A	N/A	37.903	PK
2			5725.000	63.777	25.787	-10.223	74.000	37.990	PK
3			5729.200	65.230	27.223	-8.770	74.000	38.007	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5700MHz by 802.11ac-VHT20 Ant 1	

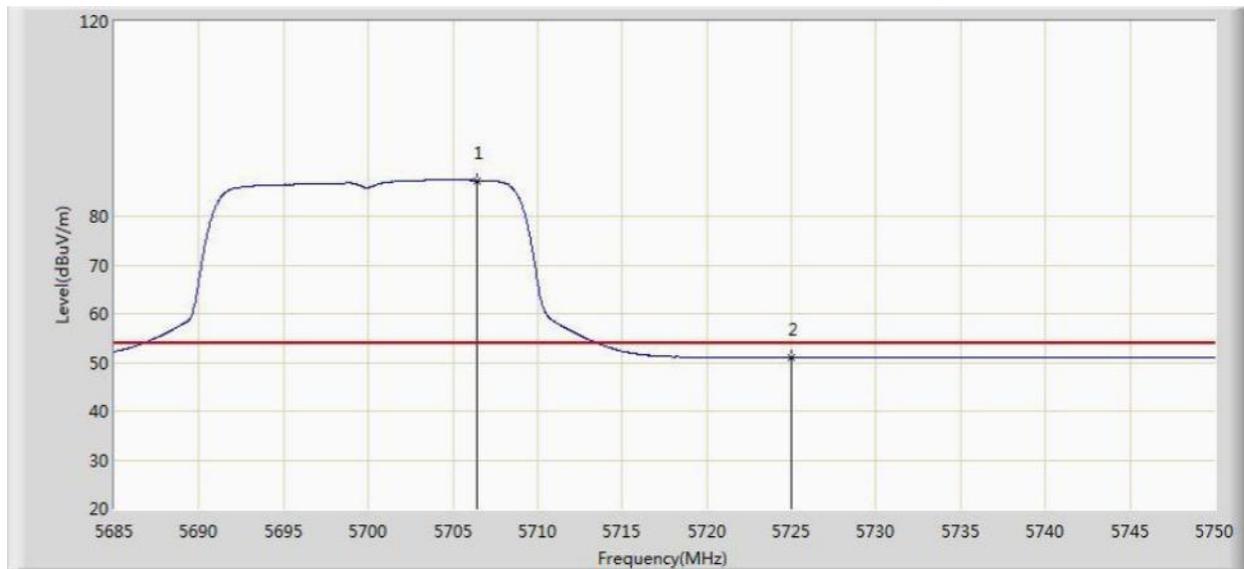


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5706.385	87.350	49.436	N/A	N/A	37.914	AV
2			5725.000	50.929	12.939	-3.071	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5700MHz by 802.11ac-VHT20 Ant 1	

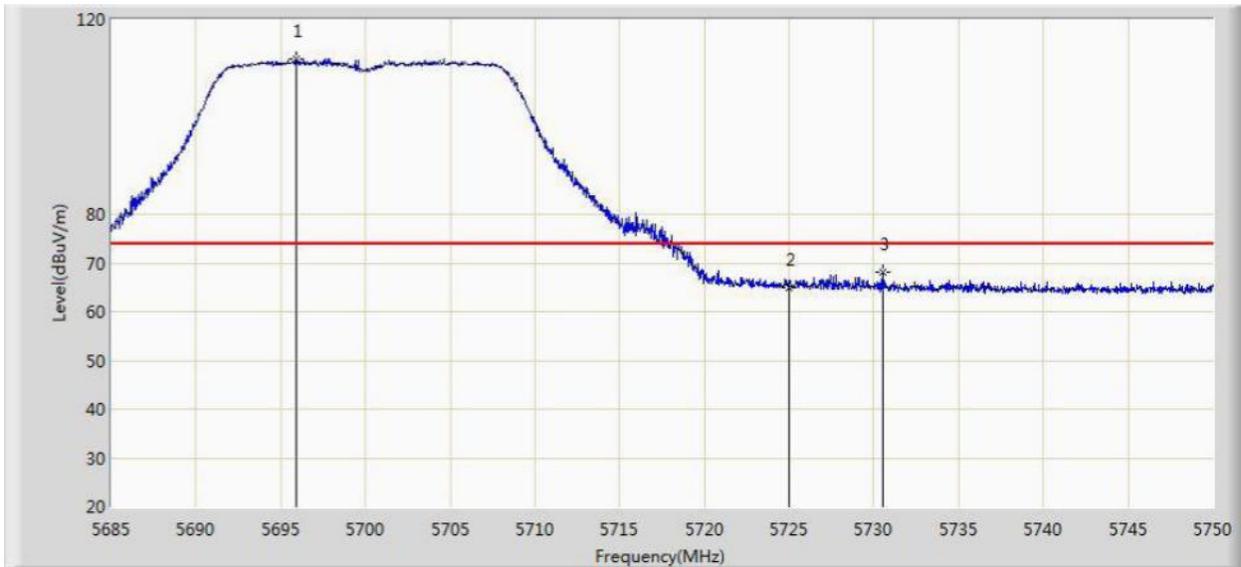


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5695.888	111.867	73.985	N/A	N/A	37.882	PK
2			5725.000	64.941	26.951	-9.059	74.000	37.990	PK
3			5730.500	67.983	29.971	-6.017	74.000	38.012	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 10:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5700MHz by 802.11ac-VHT20 Ant 1	

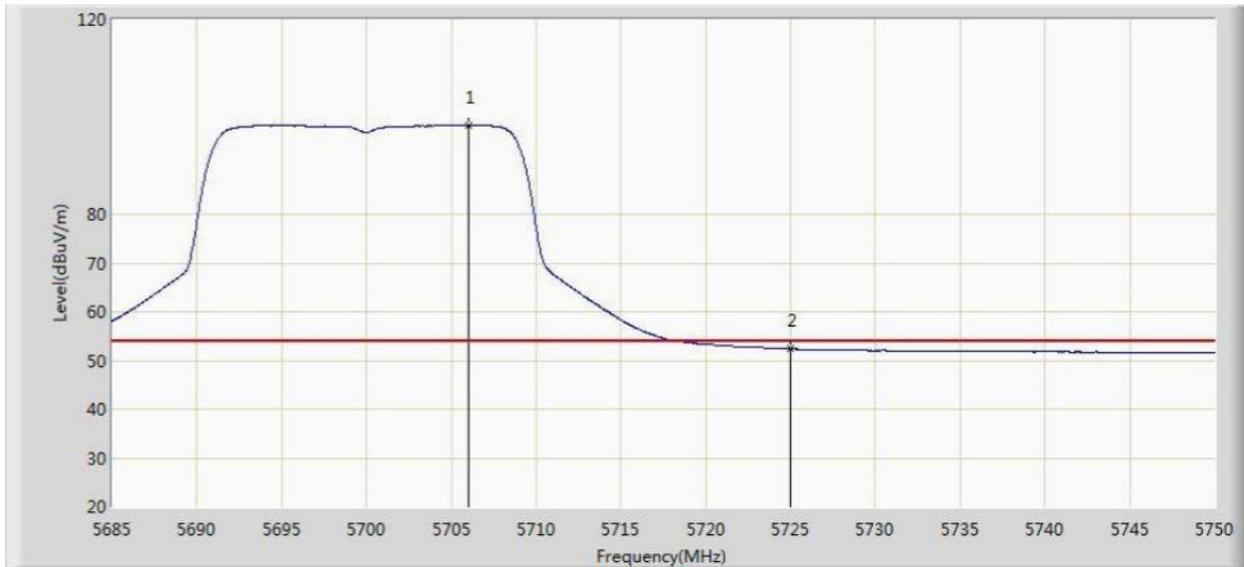


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5705.995	98.256	60.344	N/A	N/A	37.913	AV
2			5725.000	52.366	14.376	-1.634	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5745MHz by 802.11ac-VHT20 Ant 1	

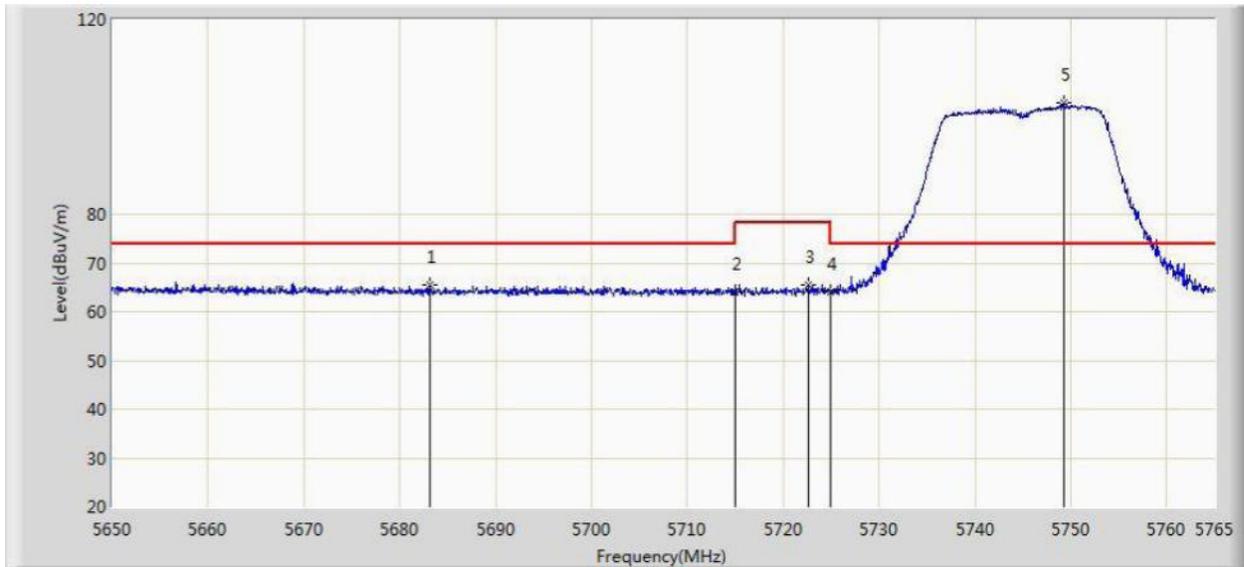


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5683.178	65.611	27.769	-8.389	74.000	37.842	PK
2			5715.000	64.083	26.134	-9.917	74.000	37.949	PK
3			5722.623	65.382	27.402	-12.818	78.200	37.980	PK
4			5725.000	64.009	26.019	-14.191	78.200	37.990	PK
5		*	5749.245	102.801	64.709	N/A	N/A	38.092	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5745MHz by 802.11ac-VHT20 Ant 1	

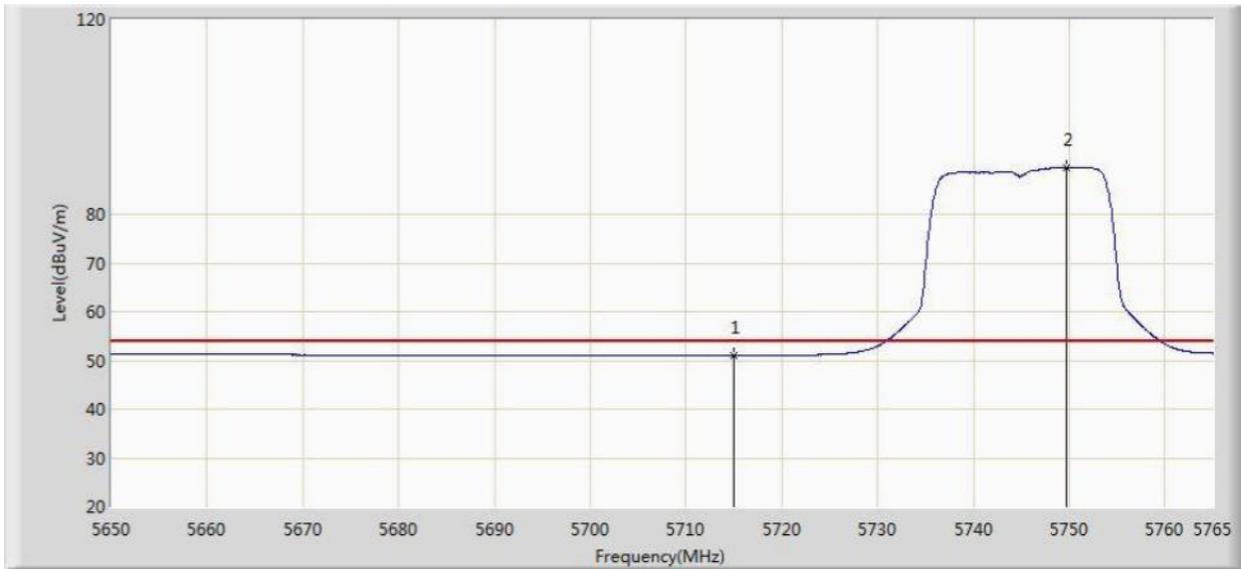


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	50.965	13.016	-3.035	54.000	37.949	AV
2		*	5749.763	89.582	51.487	N/A	N/A	38.095	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5745MHz by 802.11ac-VHT20 Ant 1	

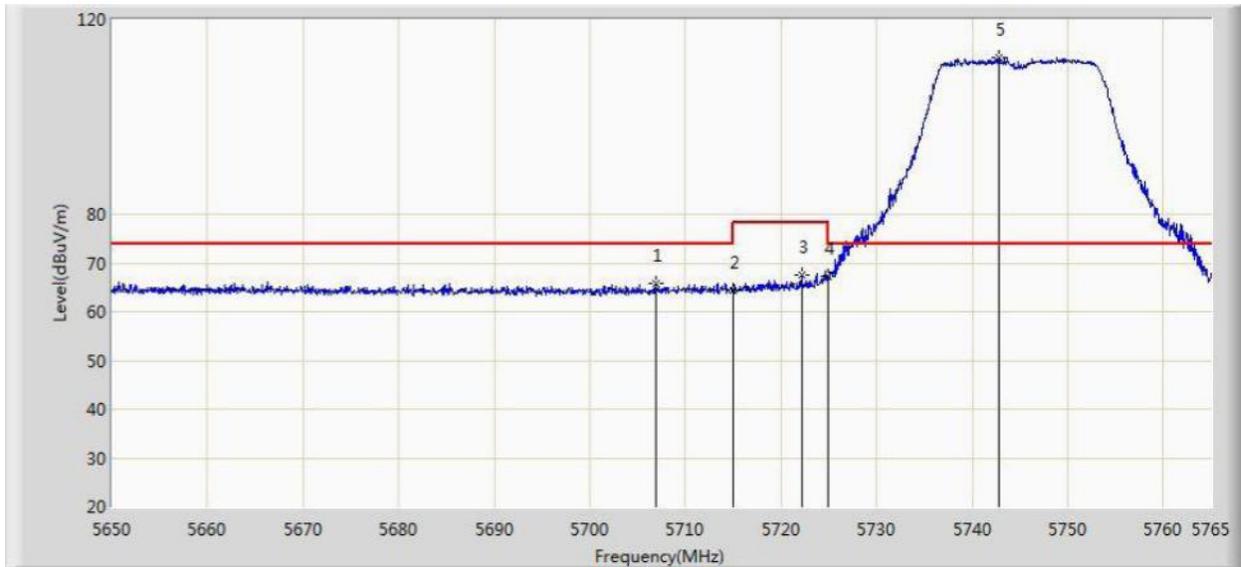


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5706.868	65.667	27.751	-8.333	74.000	37.916	PK
2			5715.000	64.455	26.506	-9.545	74.000	37.949	PK
3			5722.163	67.580	29.602	-10.620	78.200	37.978	PK
4			5725.000	67.213	29.223	-10.987	78.200	37.990	PK
5		*	5742.862	112.223	74.161	N/A	N/A	38.062	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5745MHz by 802.11ac-VHT20 Ant 1	

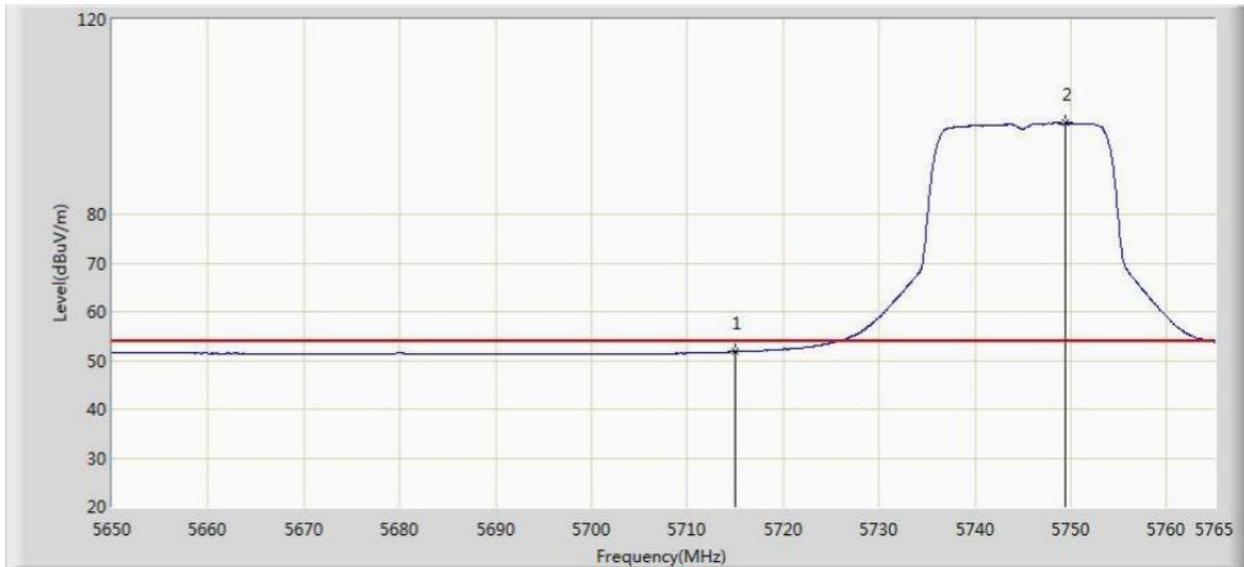


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.788	13.839	-2.212	54.000	37.949	AV
2		*	5749.417	98.728	60.635	N/A	N/A	38.093	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5825MHz by 802.11ac-VHT20 Ant 1	

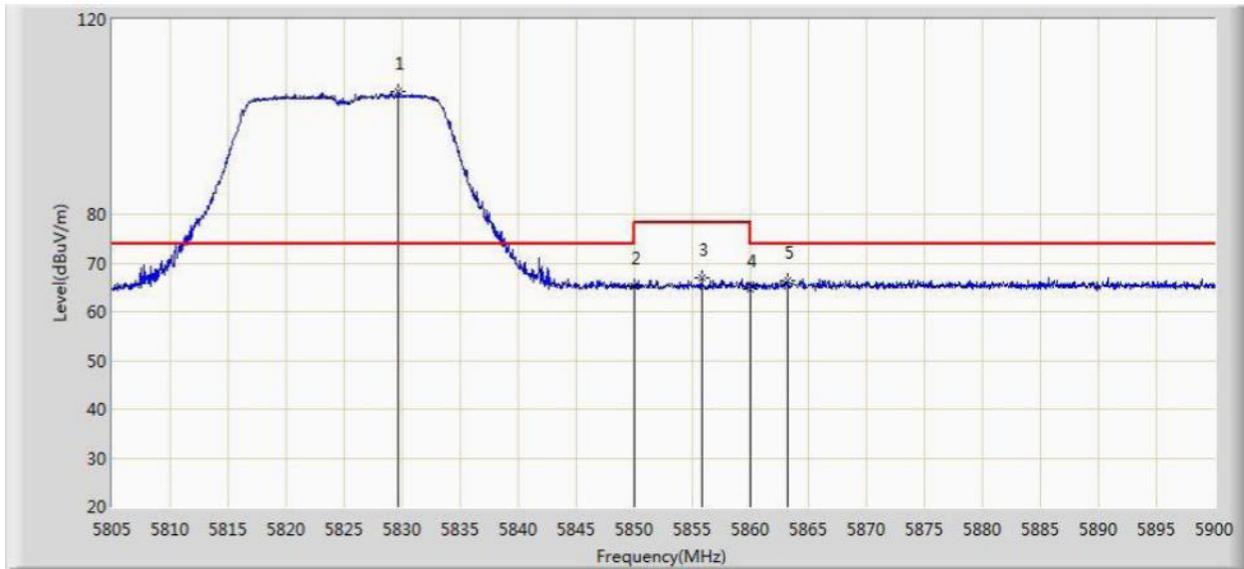


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5829.700	105.102	66.727	N/A	N/A	38.376	PK
2			5850.000	65.202	26.749	-12.998	78.200	38.454	PK
3			5855.777	67.012	28.545	-11.188	78.200	38.468	PK
4			5860.000	64.767	26.289	-9.233	74.000	38.478	PK
5			5863.235	66.491	28.007	-7.509	74.000	38.484	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5825MHz by 802.11ac-VHT20 Ant 1	

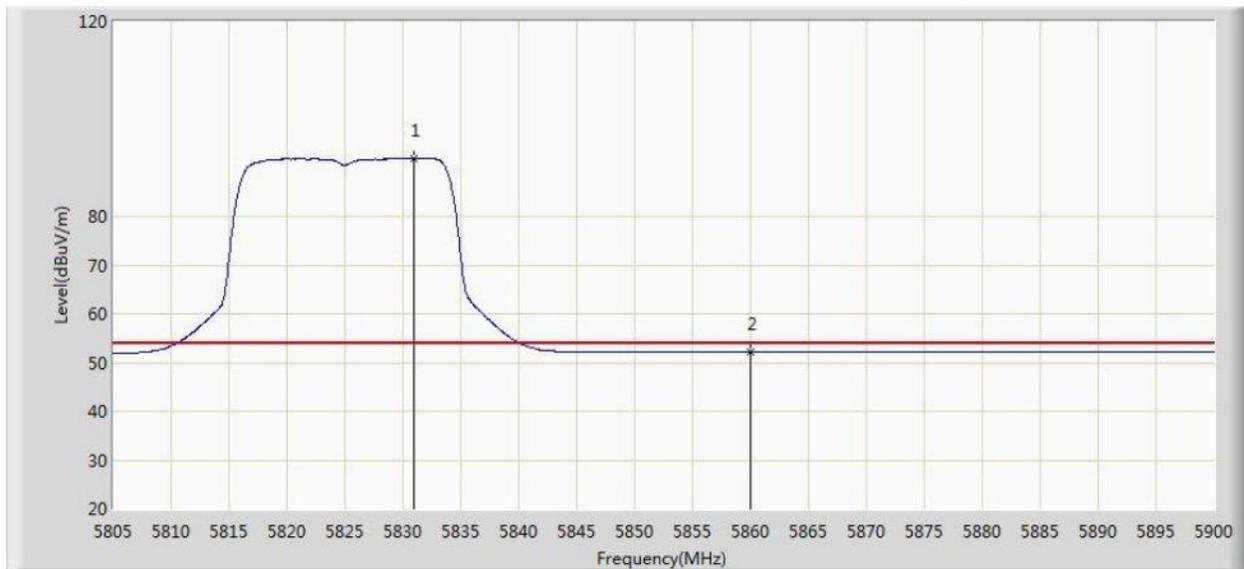


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5830.935	92.027	53.646	N/A	N/A	38.381	AV
2			5860.000	52.186	13.708	-1.814	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5825MHz by 802.11ac-VHT20 Ant 1	

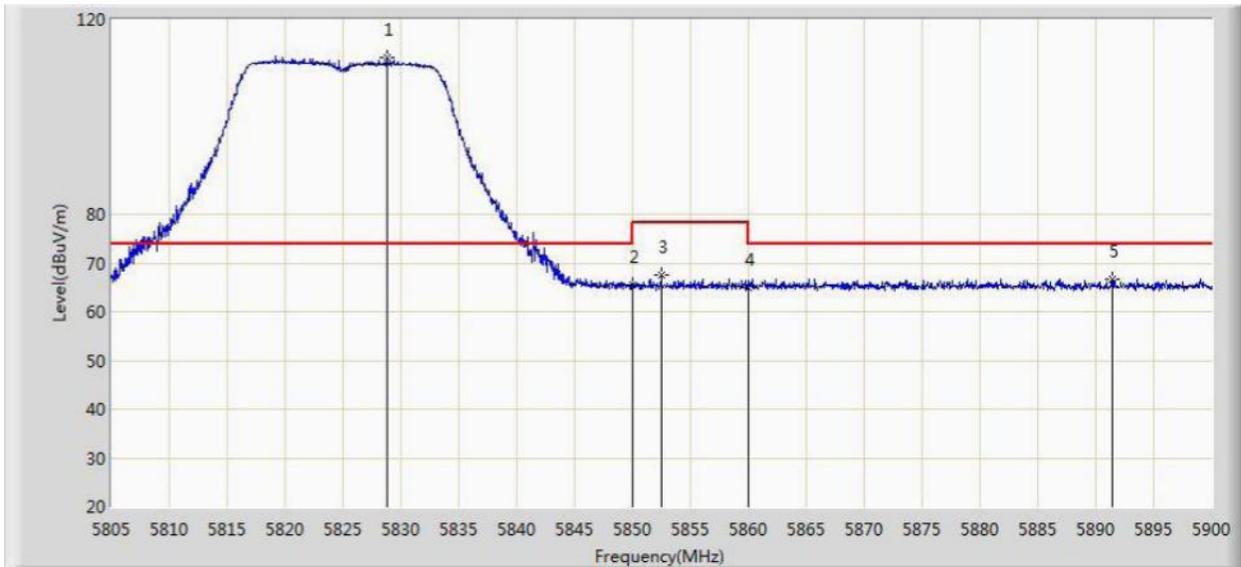


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5828.797	112.171	73.799	N/A	N/A	38.372	PK
2			5850.000	65.621	27.168	-12.579	78.200	38.454	PK
3			5852.500	67.443	28.984	-10.757	78.200	38.459	PK
4			5860.000	65.039	26.561	-8.961	74.000	38.478	PK
5			5891.450	66.787	28.277	-7.213	74.000	38.510	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 4: Transmit at channel 5825MHz by 802.11ac-VHT20 Ant 1	

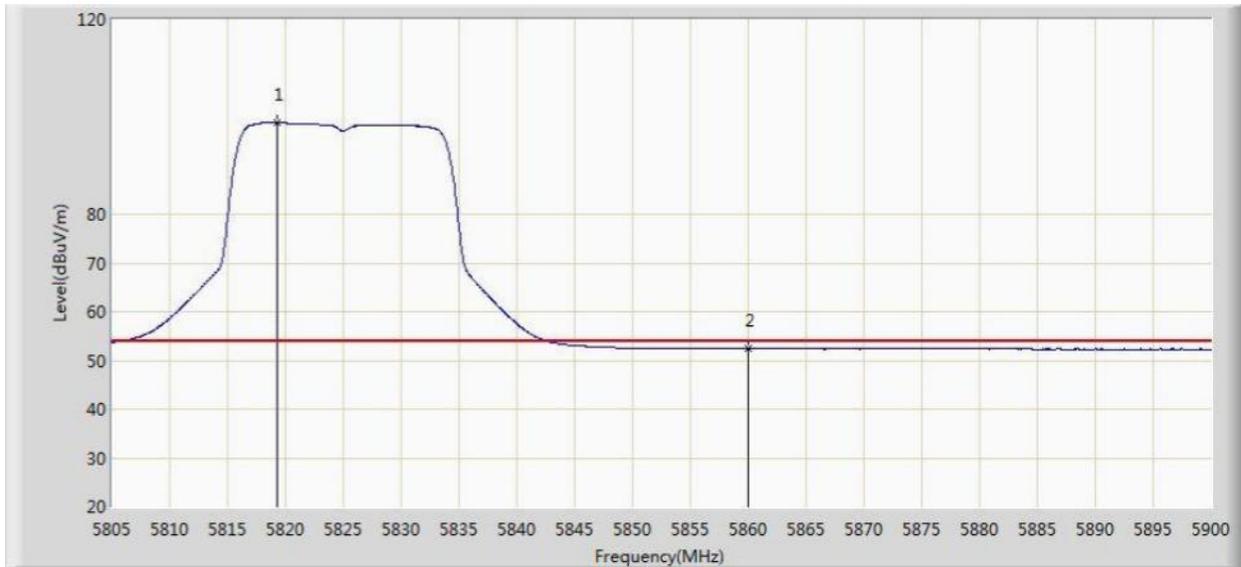


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5819.297	98.793	60.461	N/A	N/A	38.332	AV
2			5860.000	52.368	13.890	-1.632	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5190MHz by 802.11ac-VHT40 Ant 1	

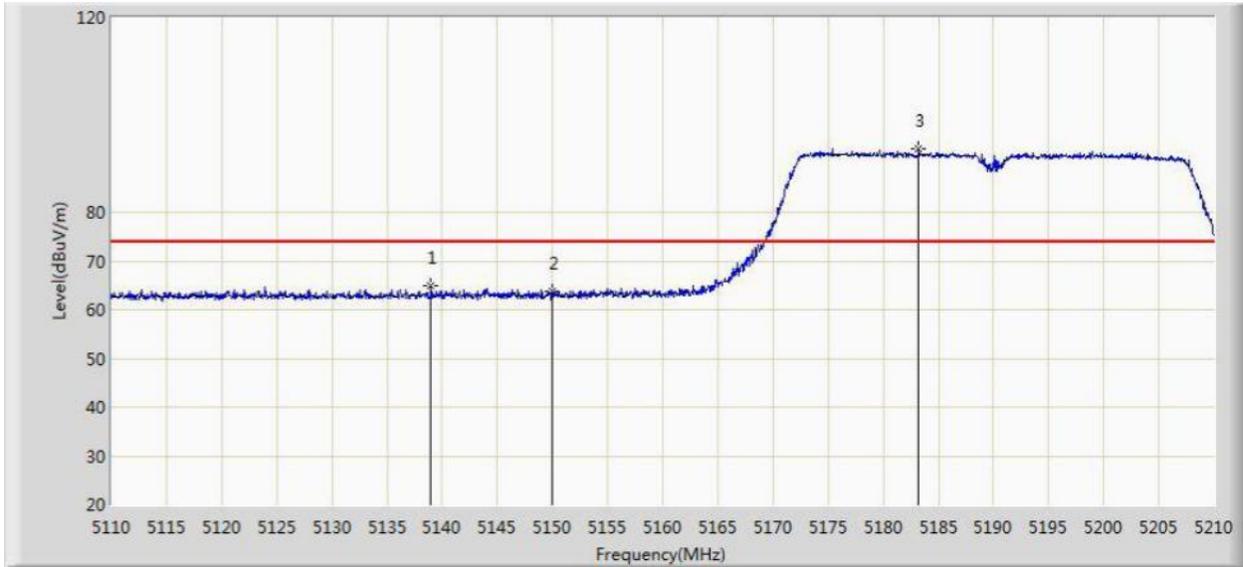


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.000	64.847	27.378	-9.153	74.000	37.469	PK
2			5150.000	63.679	26.227	-10.321	74.000	37.452	PK
3		*	5183.200	93.063	55.697	N/A	N/A	37.366	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5190MHz by 802.11ac-VHT40 Ant 1	

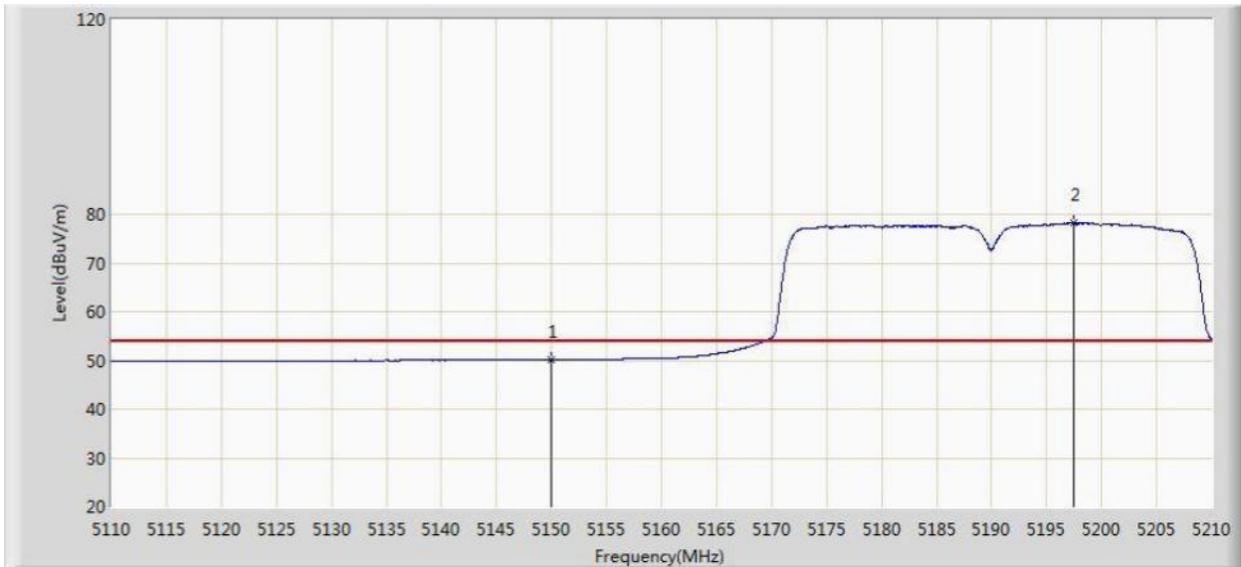


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.180	12.728	-3.820	54.000	37.452	AV
2		*	5197.500	78.240	40.909	N/A	N/A	37.332	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5190MHz by 802.11ac-VHT40 Ant 1	

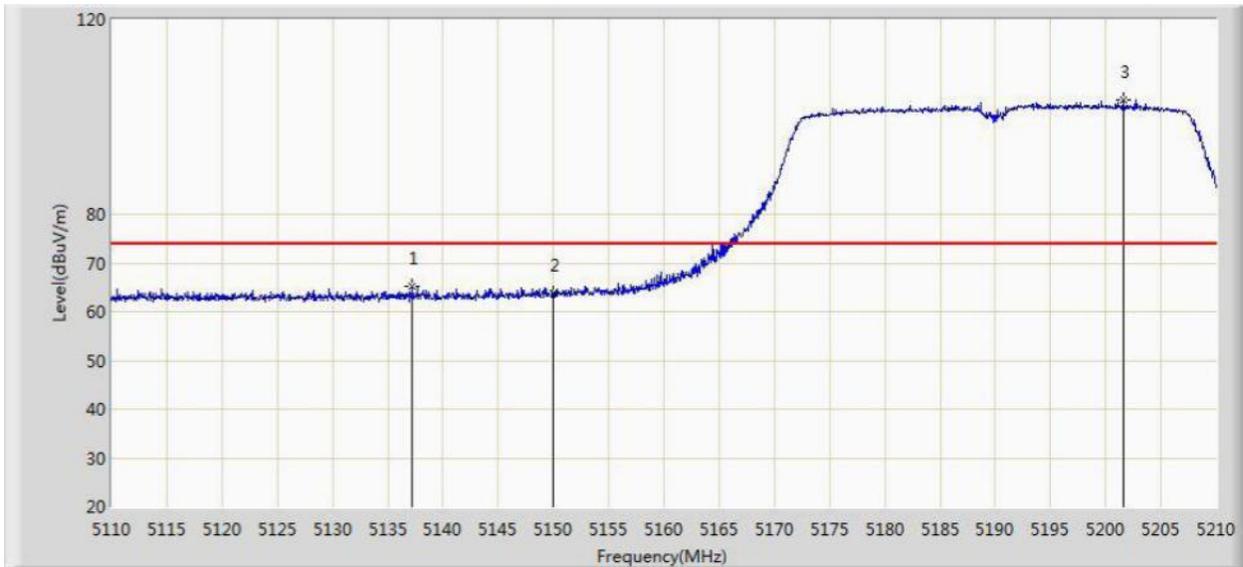


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5137.250	65.098	27.626	-8.902	74.000	37.472	PK
2			5150.000	63.710	26.258	-10.290	74.000	37.452	PK
3		*	5201.550	103.441	66.122	N/A	N/A	37.319	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5190MHz by 802.11ac-VHT40 Ant 1	

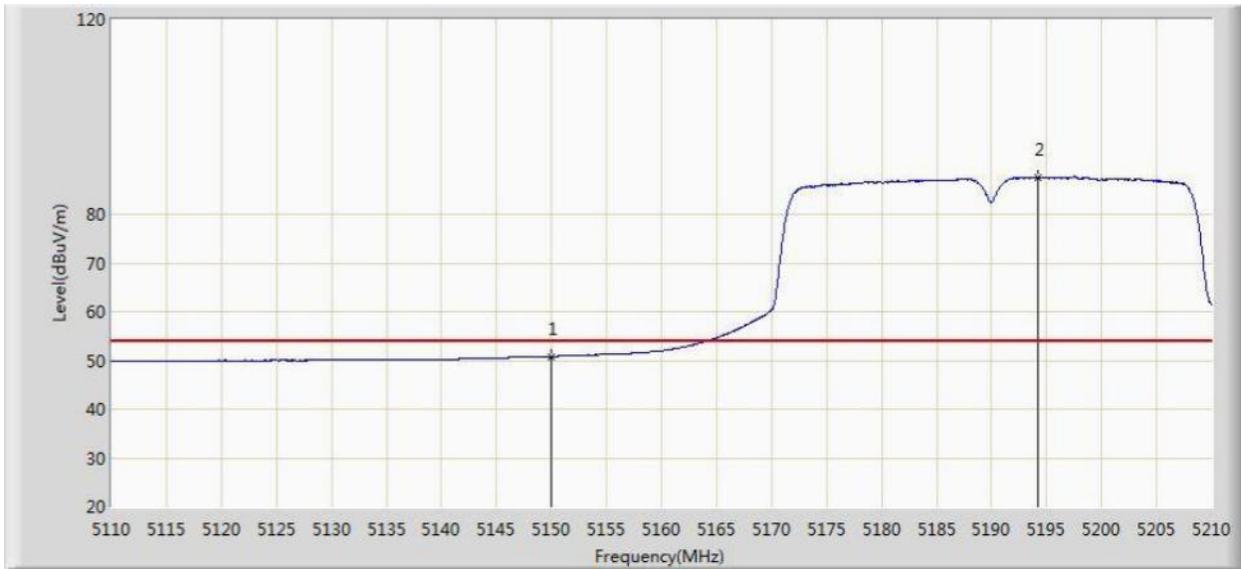


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.793	13.341	-3.207	54.000	37.452	AV
2		*	5194.200	87.556	50.217	N/A	N/A	37.339	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5310MHz by 802.11ac-VHT40 Ant 1	

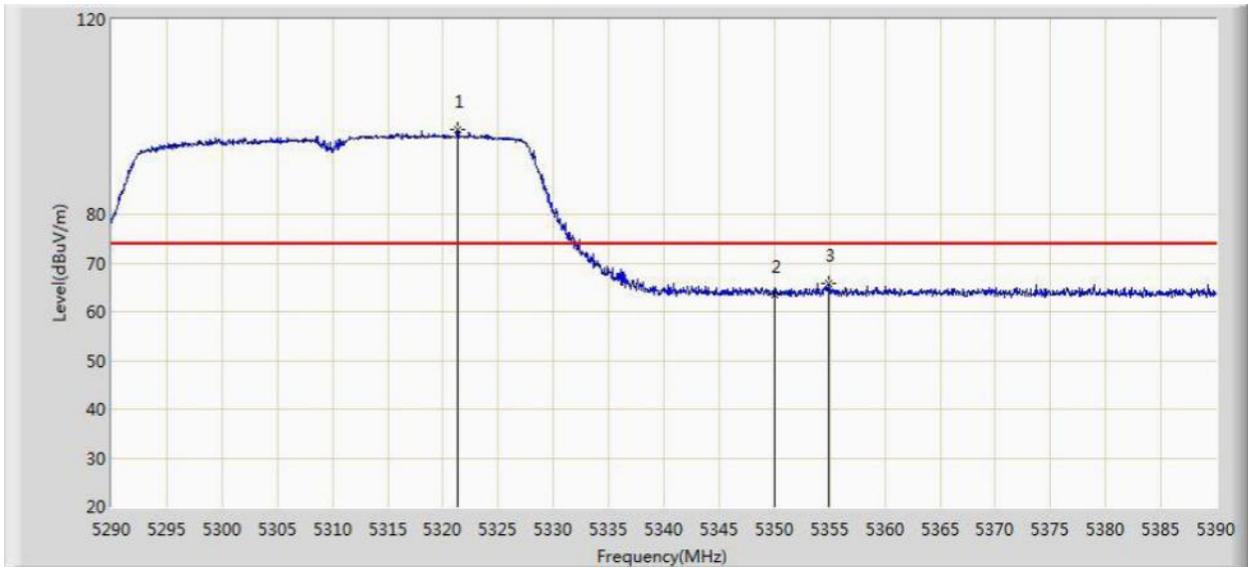


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5321.300	97.360	60.144	N/A	N/A	37.216	PK
2			5350.000	63.408	26.122	-10.592	74.000	37.286	PK
3			5354.900	65.830	28.530	-8.170	74.000	37.301	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5310MHz by 802.11ac-VHT40 Ant 1	

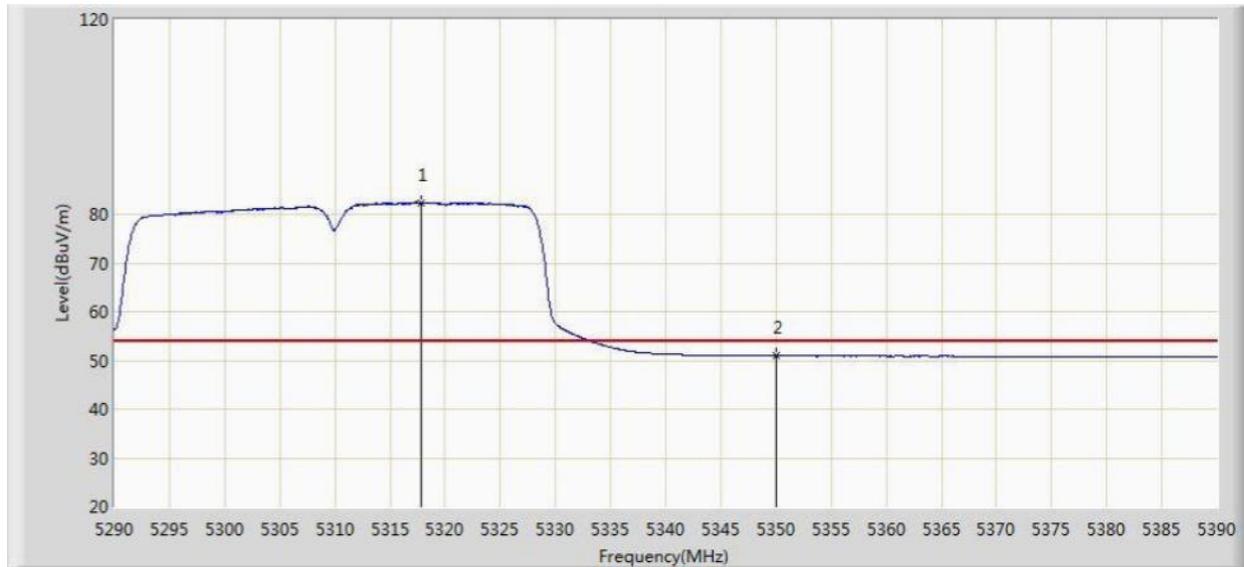


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.800	82.405	45.195	N/A	N/A	37.210	AV
2			5350.000	50.993	13.707	-3.007	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5310MHz by 802.11ac-VHT40 Ant 1	

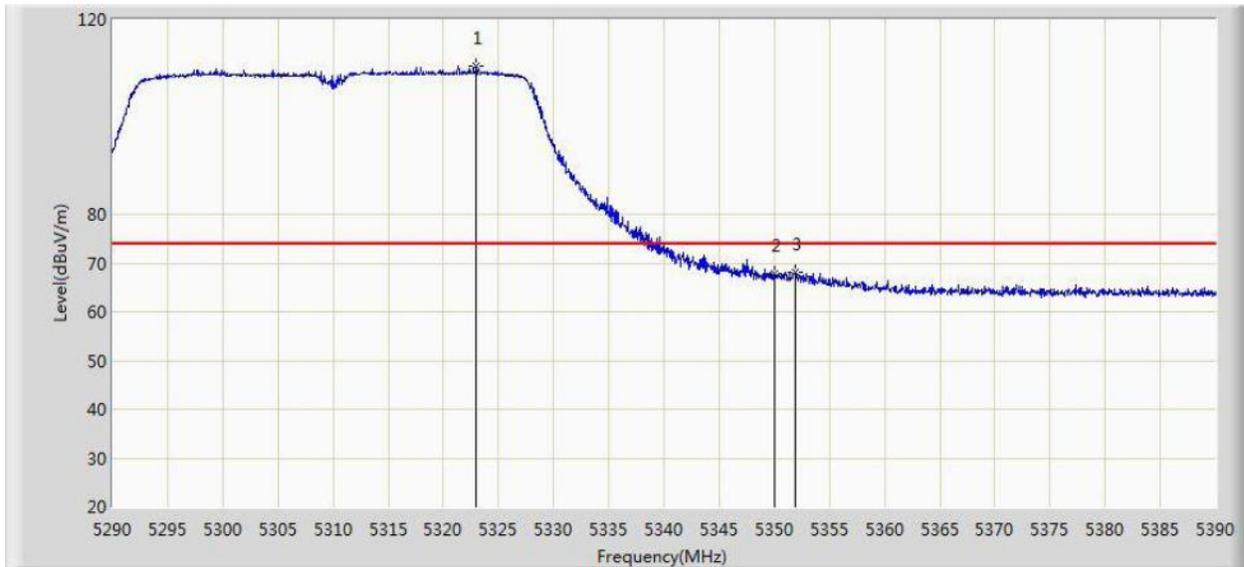


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5323.000	110.555	73.336	N/A	N/A	37.219	PK
2			5350.000	67.775	30.489	-6.225	74.000	37.286	PK
3			5351.850	68.195	30.903	-5.805	74.000	37.292	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5310MHz by 802.11ac-VHT40 Ant 1	

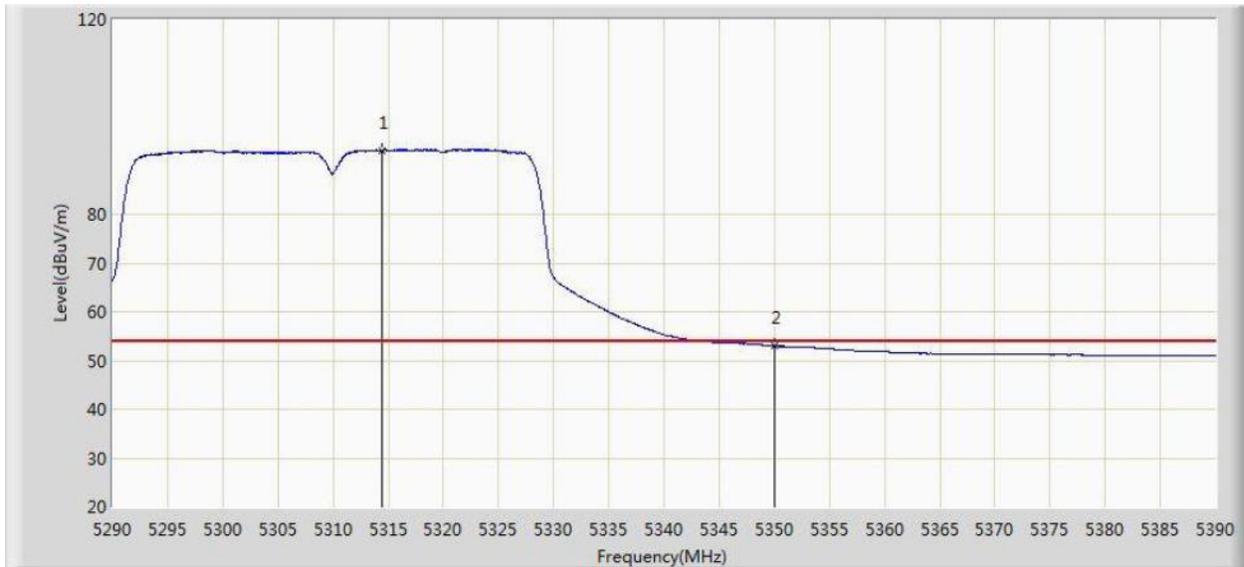


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.400	93.161	55.958	N/A	N/A	37.204	AV
2			5350.000	53.000	15.714	-1.000	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5510MHz by 802.11ac-VHT40 Ant 1	

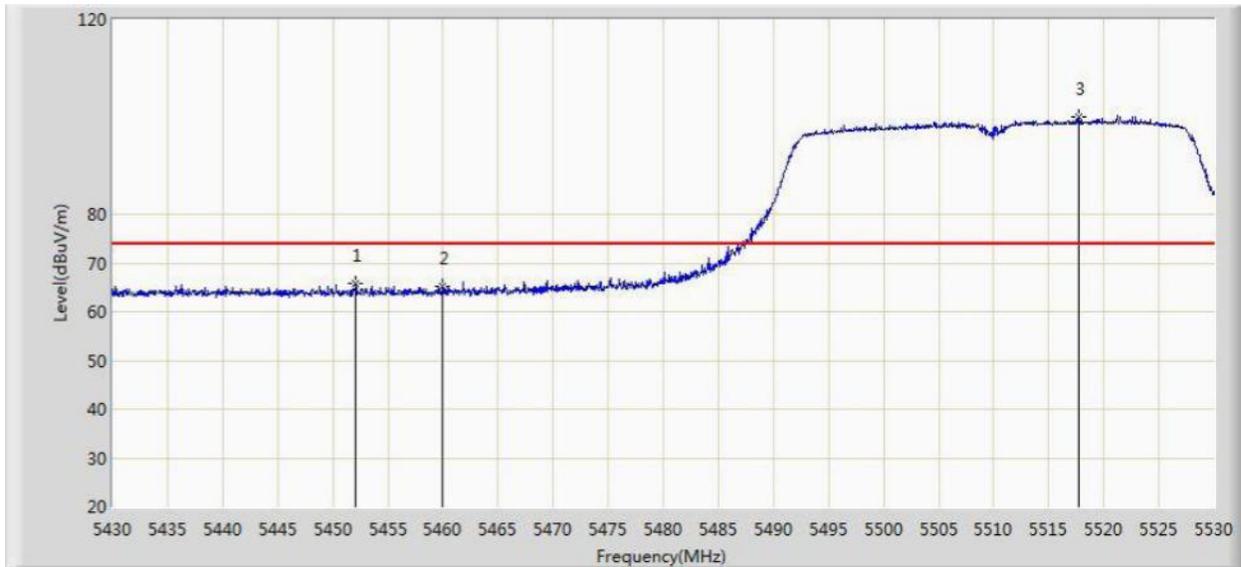


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5452.100	65.660	28.117	-8.340	74.000	37.543	PK
2			5460.000	65.165	27.602	-8.835	74.000	37.563	PK
3		*	5517.750	99.994	62.350	N/A	N/A	37.645	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5510MHz by 802.11ac-VHT40 Ant 1	

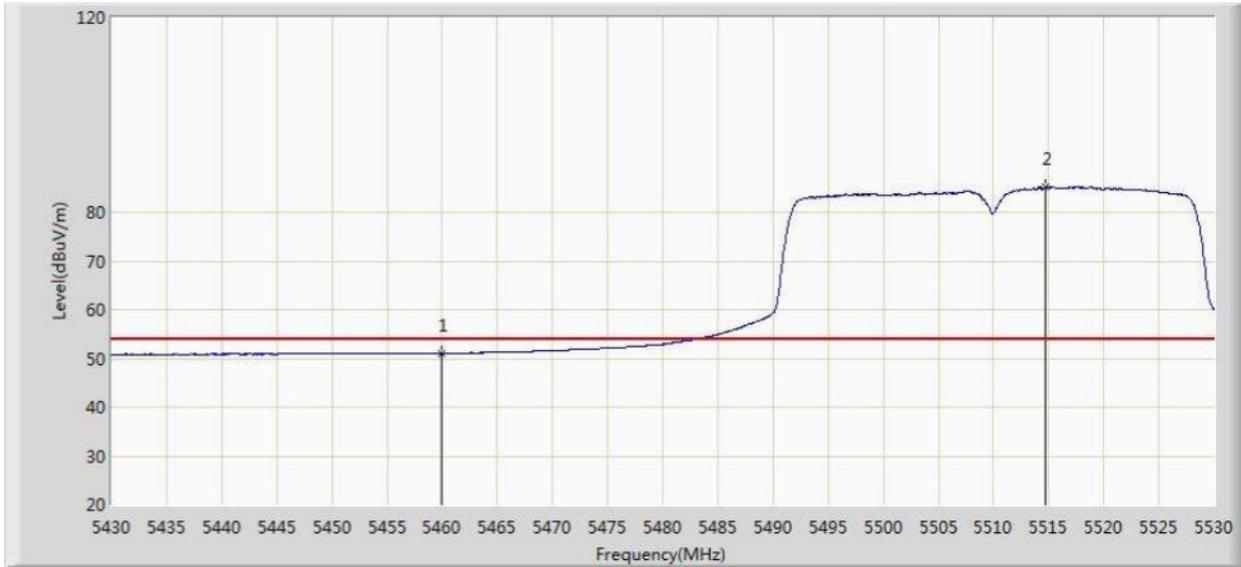


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	51.037	13.474	-2.963	54.000	37.563	AV
2		*	5514.650	85.086	47.445	N/A	N/A	37.641	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5510MHz by 802.11ac-VHT40 Ant 1	

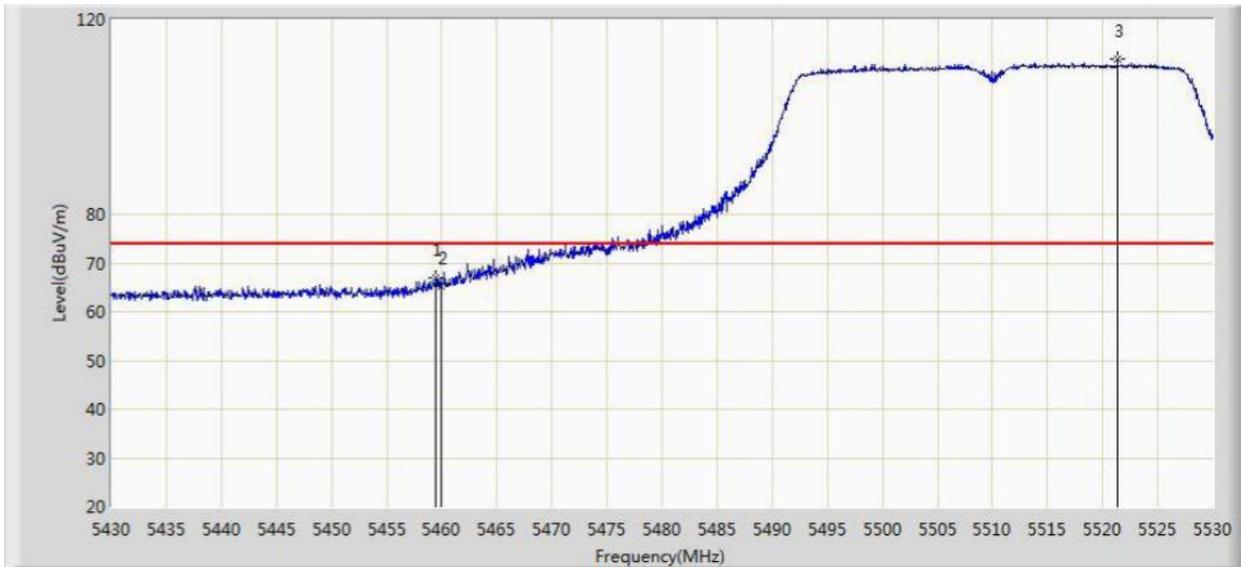


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5459.500	67.013	29.452	-6.987	74.000	37.561	PK
2			5460.000	65.098	27.535	-8.902	74.000	37.563	PK
3		*	5521.350	111.964	74.316	N/A	N/A	37.648	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:50
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5510MHz by 802.11ac-VHT40 Ant 1	

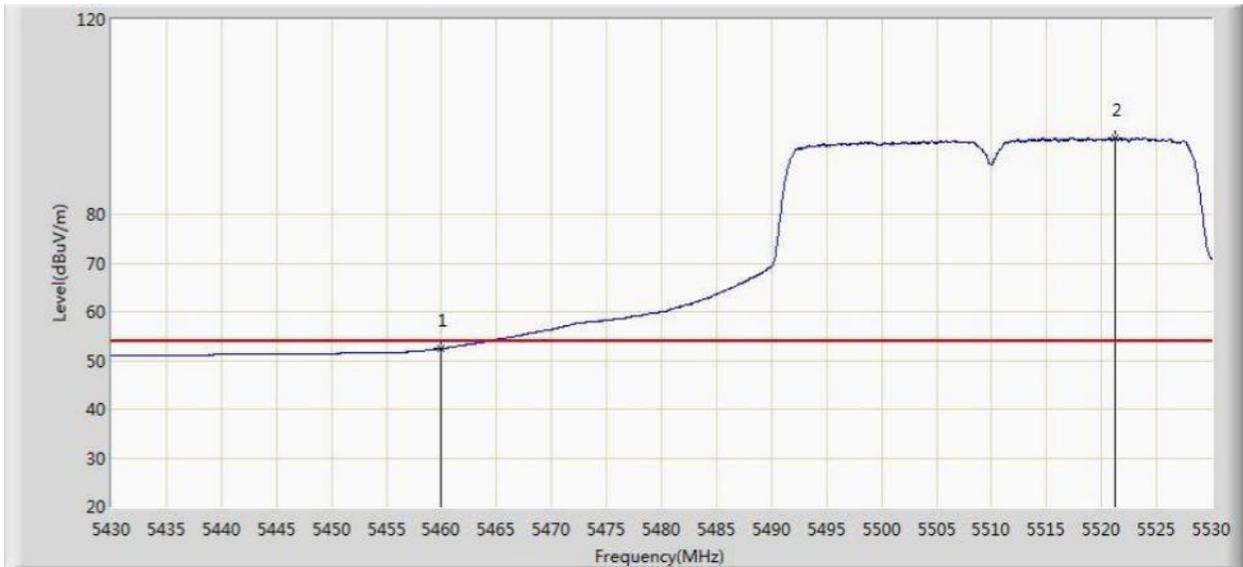


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	52.445	14.882	-1.555	54.000	37.563	AV
2		*	5521.250	95.663	58.015	N/A	N/A	37.648	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5670MHz by 802.11ac-VHT40 Ant 1	

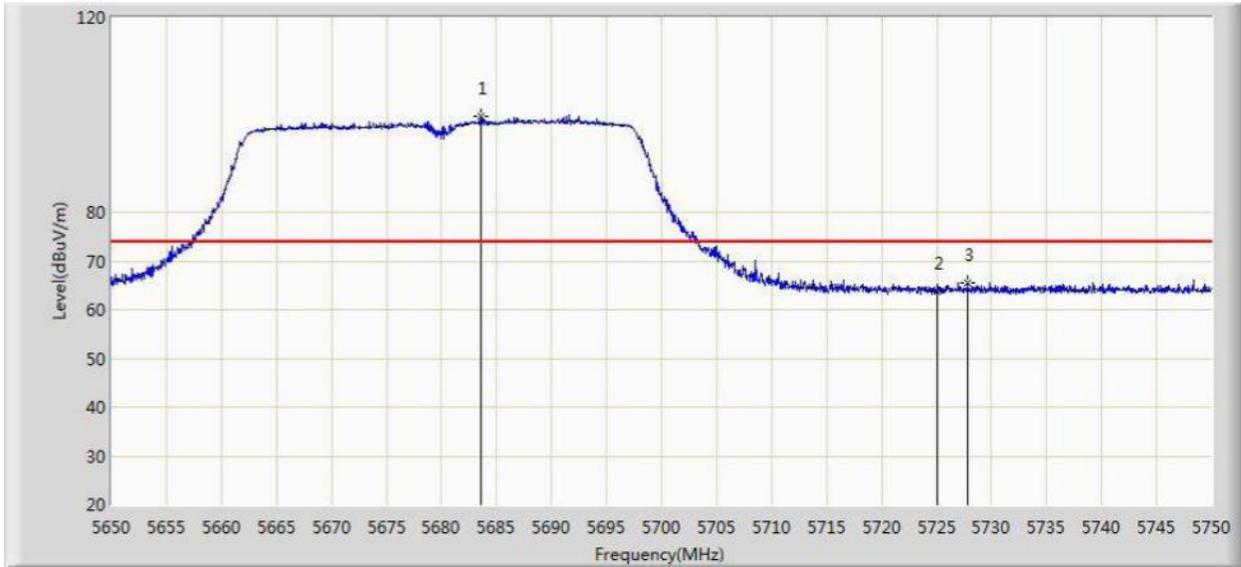


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5683.550	99.660	61.817	N/A	N/A	37.843	PK
2			5725.000	63.771	25.781	-10.229	74.000	37.990	PK
3			5727.850	65.612	27.611	-8.388	74.000	38.002	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5670MHz by 802.11ac-VHT40 Ant 1	

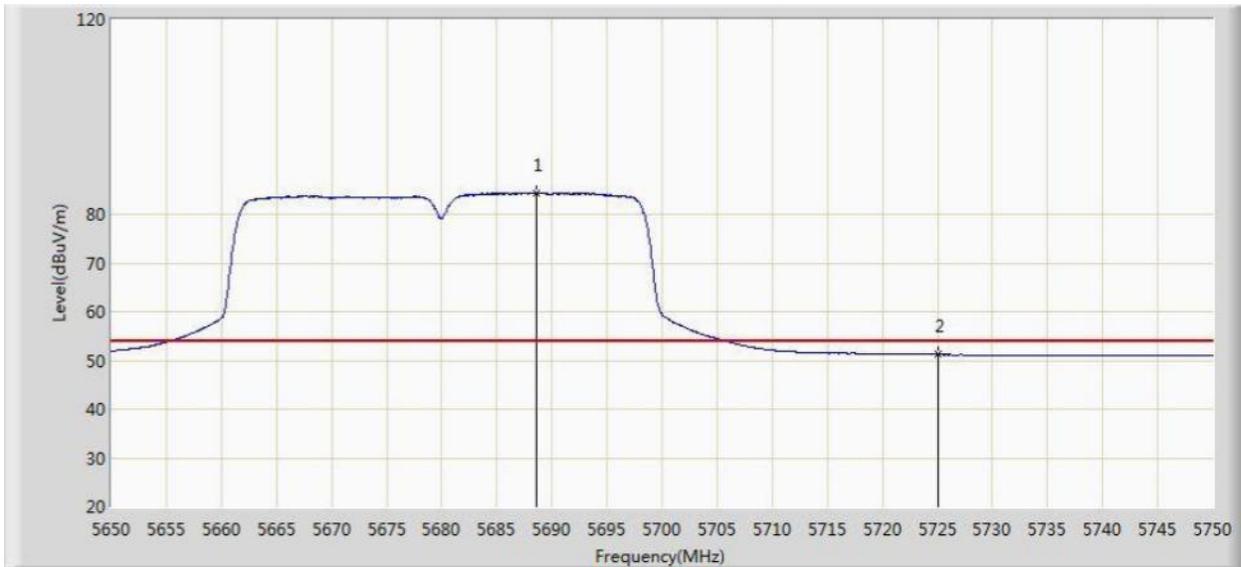


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5688.550	84.486	46.626	N/A	N/A	37.861	AV
2			5725.000	51.230	13.240	-2.770	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5670MHz by 802.11ac-VHT40 Ant 1	

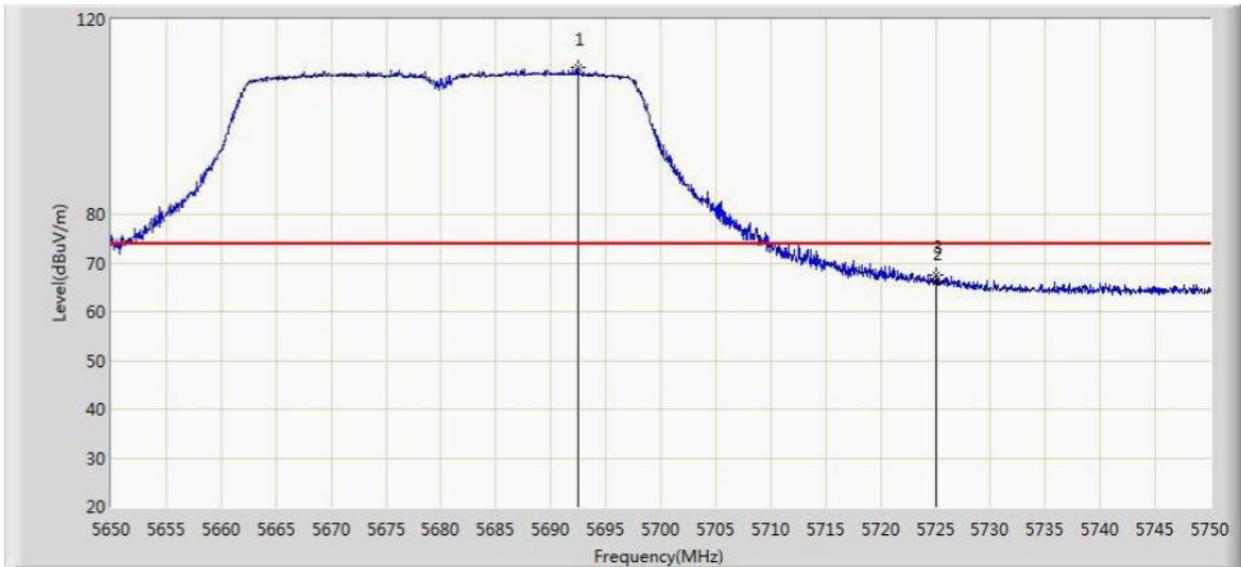


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5692.500	110.009	72.135	N/A	N/A	37.873	PK
2			5725.000	65.964	27.974	-8.036	74.000	37.990	PK
3			5725.050	67.541	29.551	-6.459	74.000	37.990	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5670MHz by 802.11ac-VHT40 Ant 1	

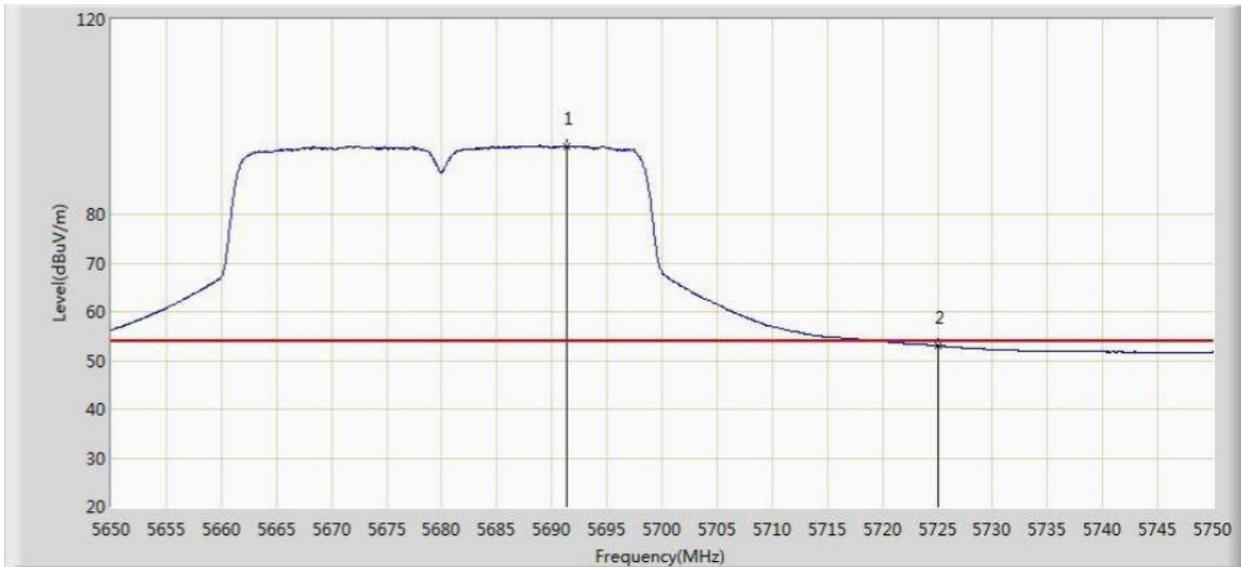


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5691.300	93.992	56.122	N/A	N/A	37.870	AV
2			5725.000	53.058	15.068	-0.942	54.000	37.990	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 11:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5755MHz by 802.11ac-VHT40 Ant 1	

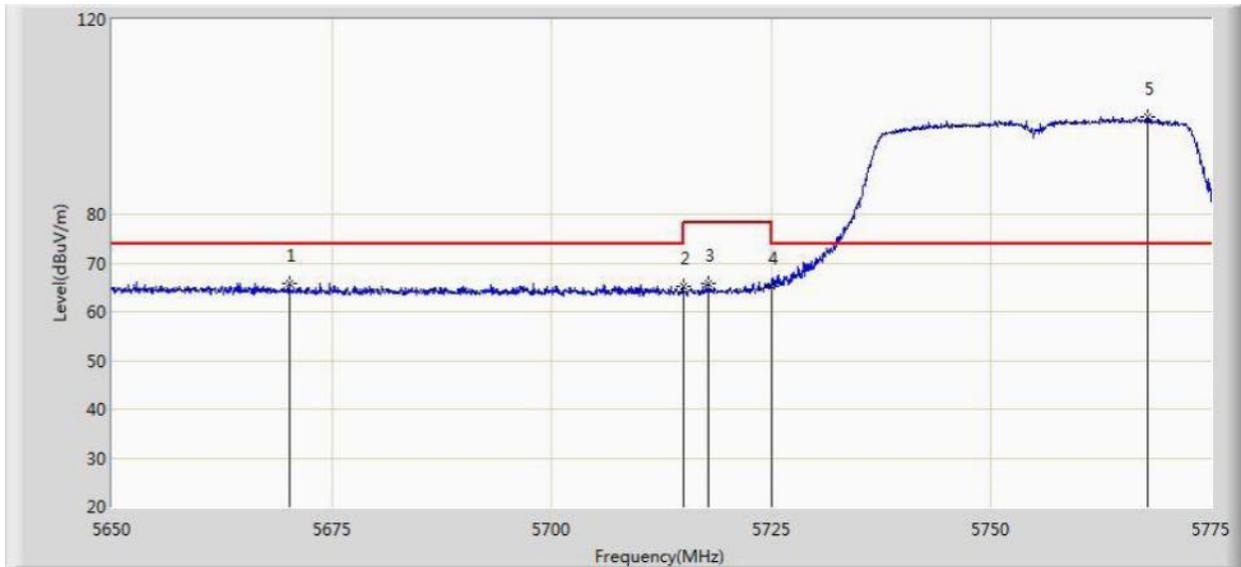


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5670.187	65.925	28.115	-8.075	74.000	37.809	PK
2			5715.000	65.310	27.361	-8.690	74.000	37.949	PK
3			5717.875	65.890	27.929	-12.310	78.200	37.961	PK
4			5725.000	65.289	27.299	-12.911	78.200	37.990	PK
5		*	5767.750	100.143	61.983	N/A	N/A	38.161	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 12:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5755MHz by 802.11ac-VHT40 Ant 1	

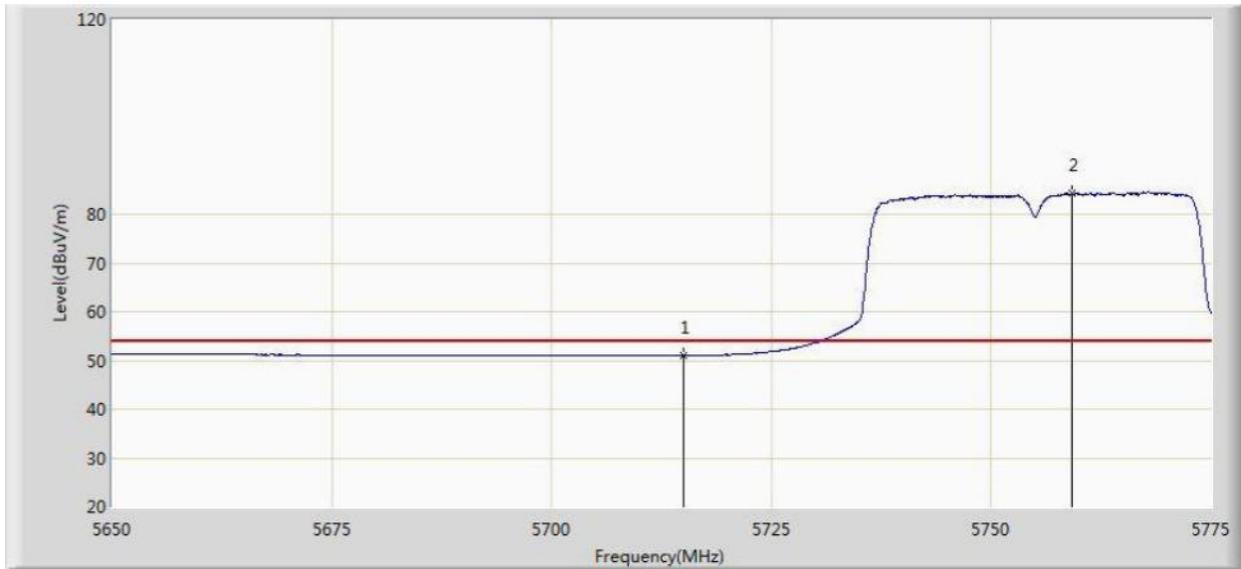


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.021	13.072	-2.979	54.000	37.949	AV
2		*	5759.187	84.253	46.115	N/A	N/A	38.138	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 12:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5755MHz by 802.11ac-VHT40 Ant 1	

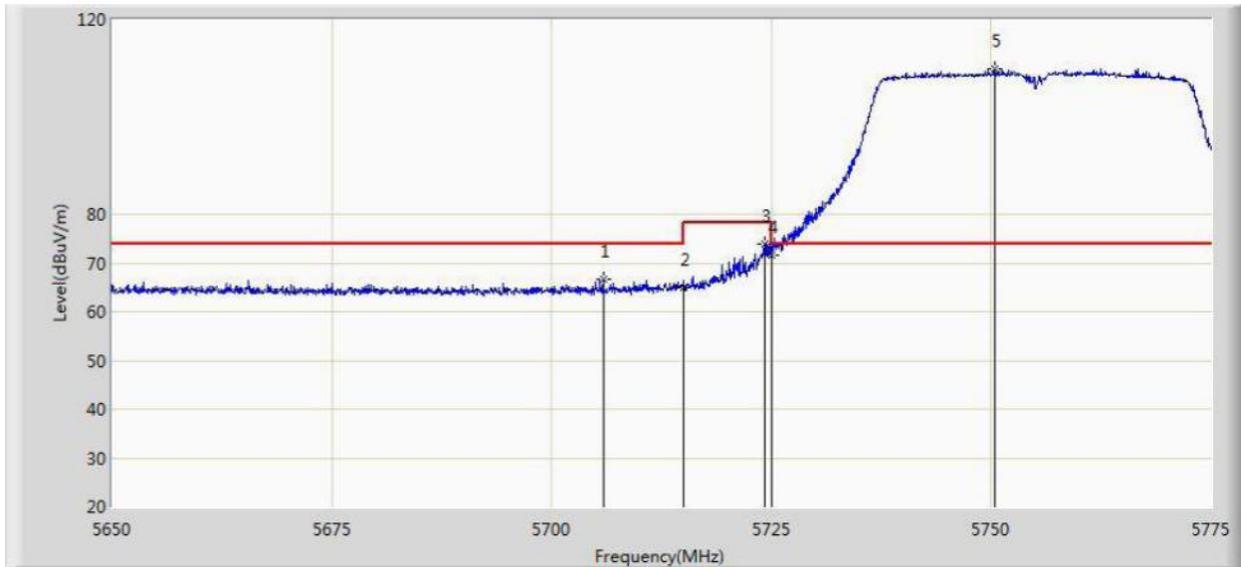


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5705.875	66.559	28.647	-7.441	74.000	37.912	PK
2			5715.000	64.986	27.037	-9.014	74.000	37.949	PK
3			5724.187	74.031	36.045	-4.169	78.200	37.987	PK
4			5725.000	71.457	33.467	-6.743	78.200	37.990	PK
5		*	5750.375	109.716	71.618	N/A	N/A	38.098	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 12:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5755MHz by 802.11ac-VHT40 Ant 1	

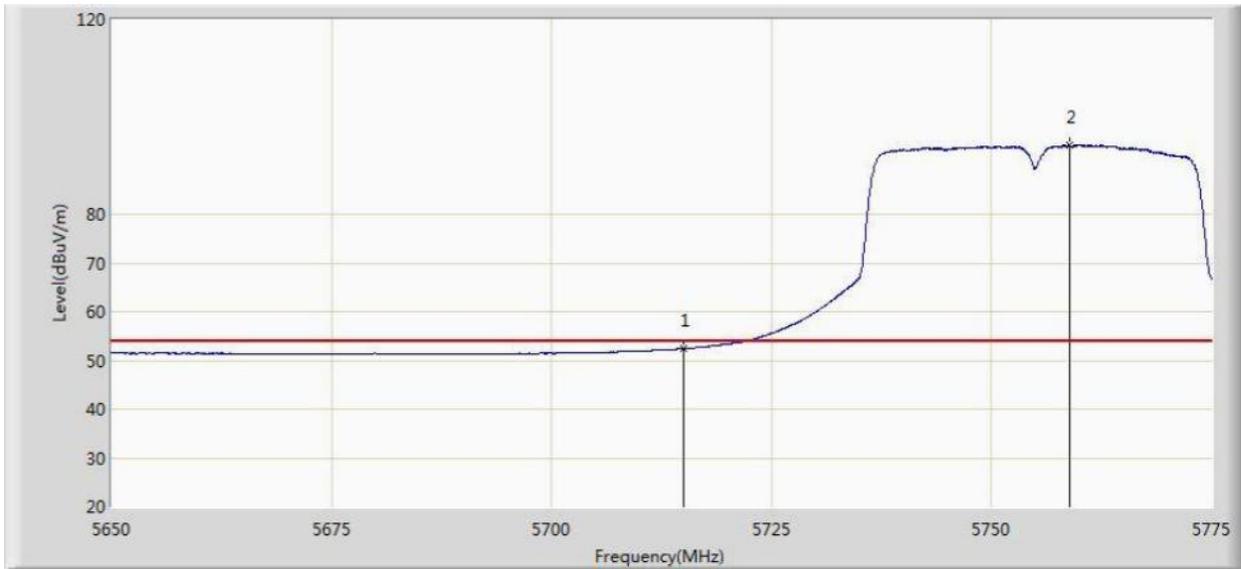


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	52.432	14.483	-1.568	54.000	37.949	AV
2		*	5758.875	94.090	55.954	N/A	N/A	38.136	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5795MHz by 802.11ac-VHT40 Ant 1	

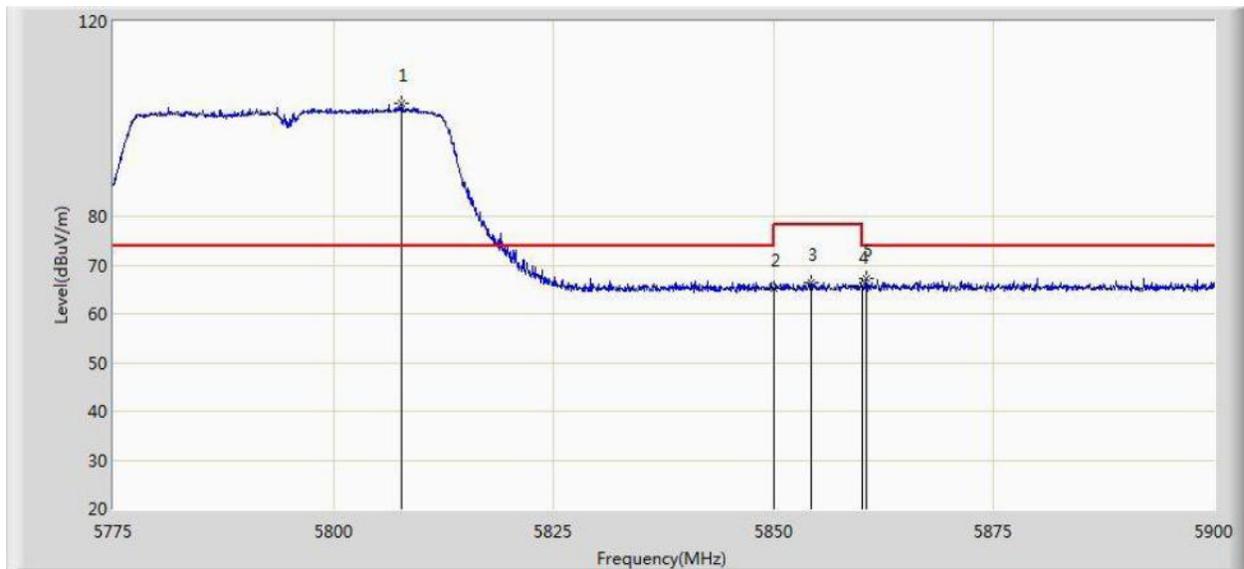


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5807.812	103.116	64.829	N/A	N/A	38.287	PK
2			5850.000	65.169	26.716	-13.031	78.200	38.454	PK
3			5854.187	66.246	27.783	-11.954	78.200	38.463	PK
4			5860.000	65.711	27.233	-8.289	74.000	38.478	PK
5			5860.562	67.102	28.623	-6.898	74.000	38.479	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:10
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5795MHz by 802.11ac-VHT40 Ant 1	

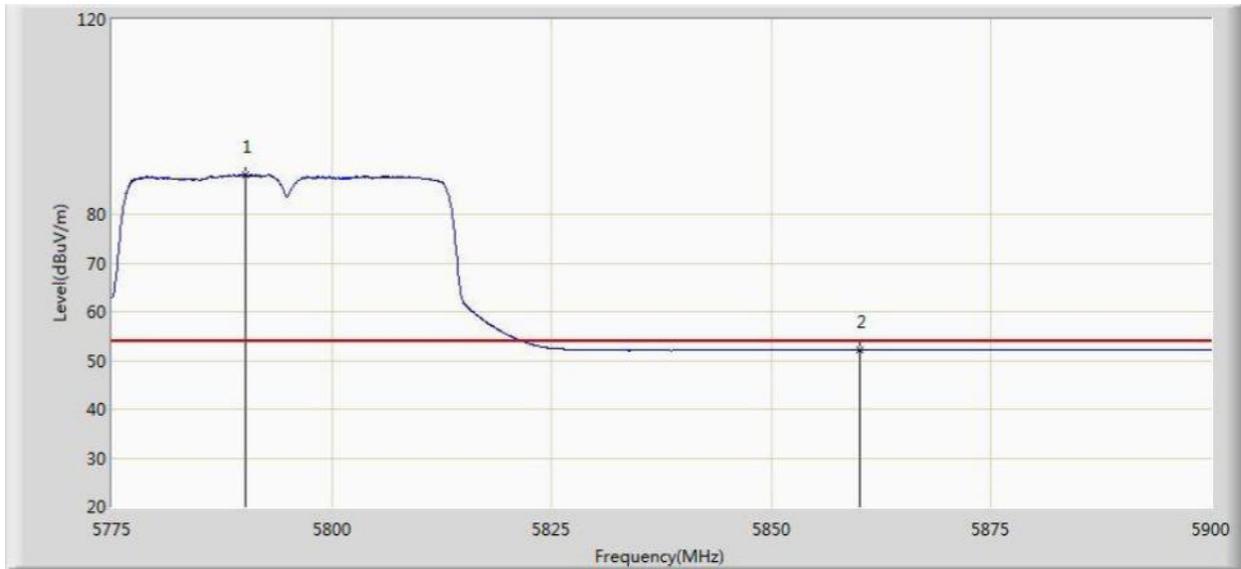


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5790.250	88.172	49.940	N/A	N/A	38.232	AV
2			5860.000	52.186	13.708	-1.814	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5795MHz by 802.11ac-VHT40 Ant 1	

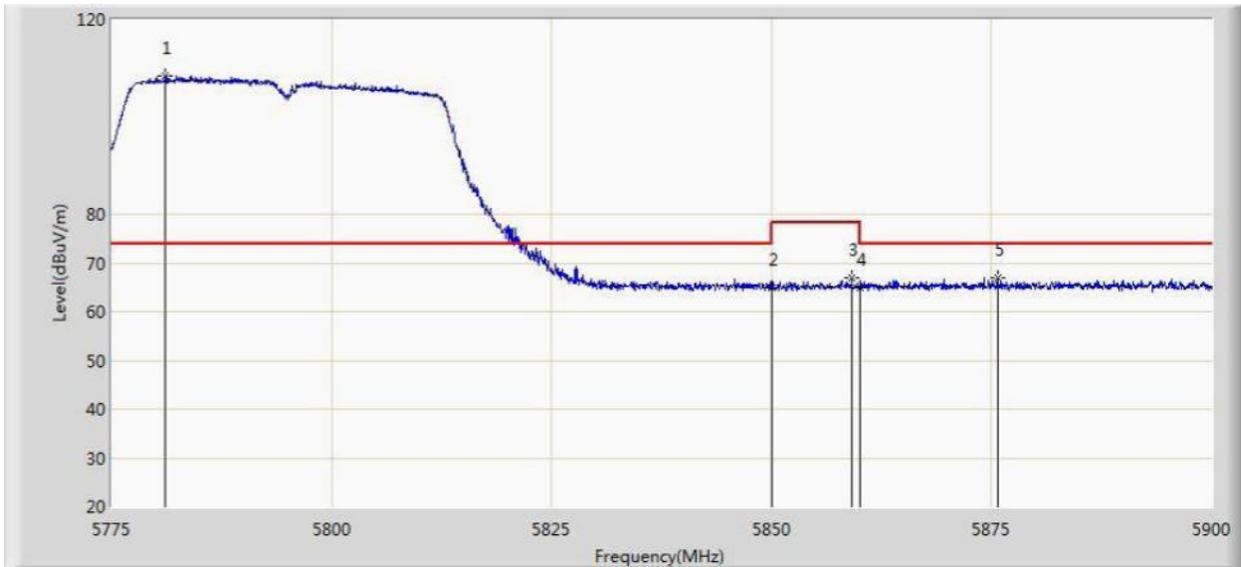


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5781.187	108.397	70.198	N/A	N/A	38.198	PK
2			5850.000	65.053	26.600	-13.147	78.200	38.454	PK
3			5859.125	67.062	28.586	-11.138	78.200	38.476	PK
4			5860.000	64.885	26.407	-9.115	74.000	38.478	PK
5			5875.687	67.016	28.518	-6.984	74.000	38.498	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 5: Transmit at channel 5795MHz by 802.11ac-VHT40 Ant 1	

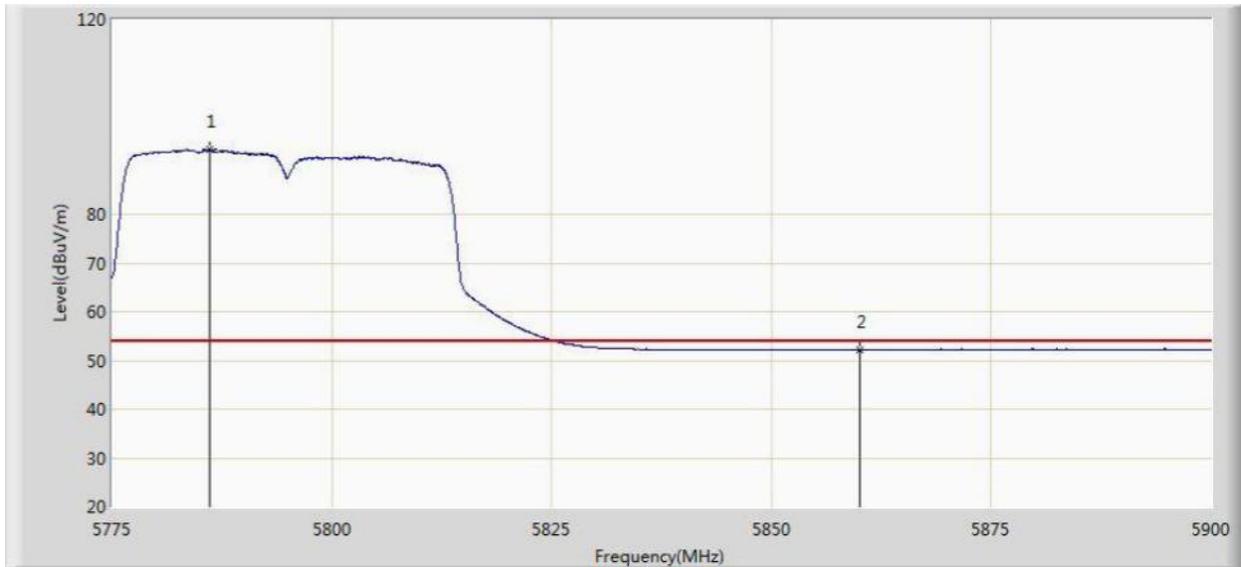


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5786.187	93.328	55.111	N/A	N/A	38.217	AV
2			5860.000	52.264	13.786	-1.736	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5210MHz by 802.11ac-VHT80 Ant 1	

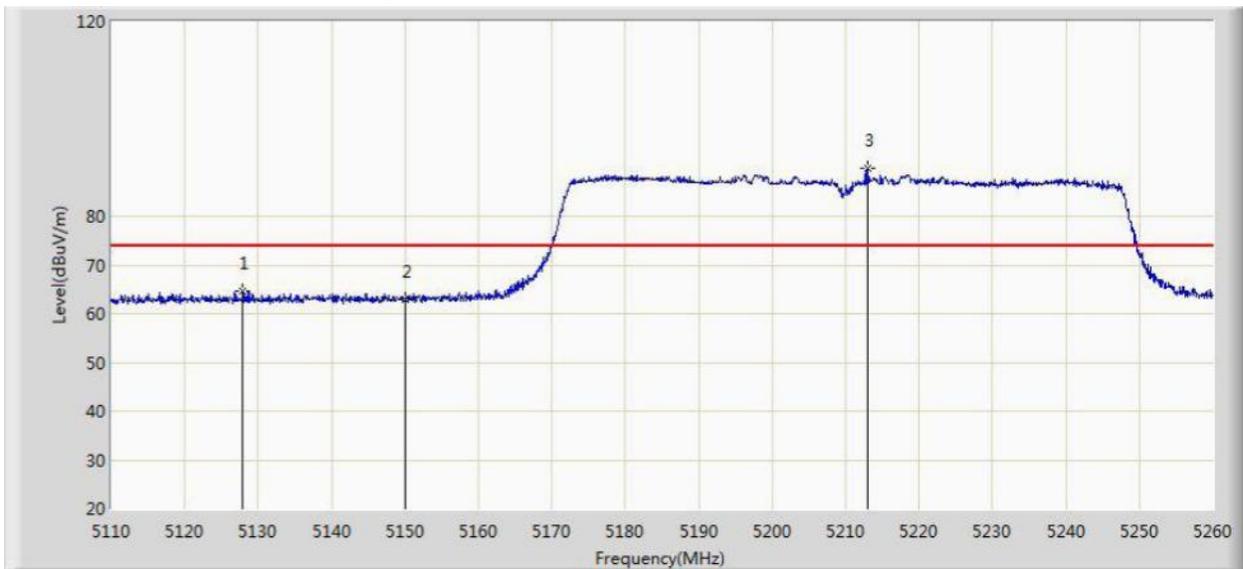


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5127.925	64.559	27.081	-9.441	74.000	37.478	PK
2			5150.000	62.891	25.439	-11.109	74.000	37.452	PK
3		*	5212.975	89.752	52.471	N/A	N/A	37.281	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:21
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5210MHz by 802.11ac-VHT80 Ant 1	

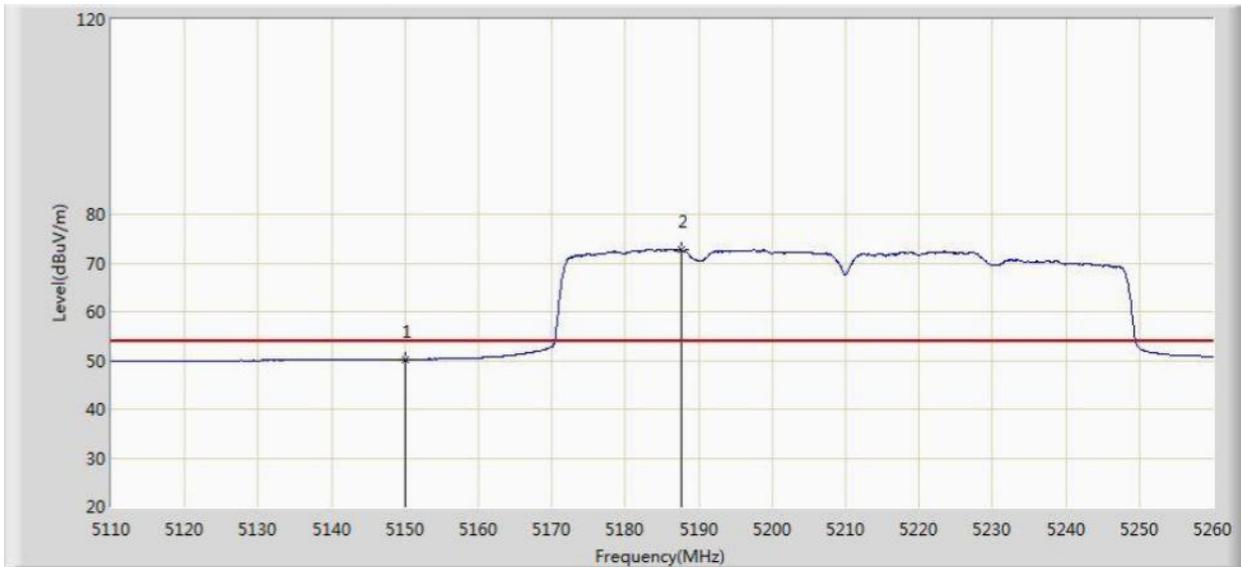


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.173	12.721	-3.827	54.000	37.452	AV
2		*	5187.625	72.676	35.321	N/A	N/A	37.355	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5210MHz by 802.11ac-VHT80 Ant 1	

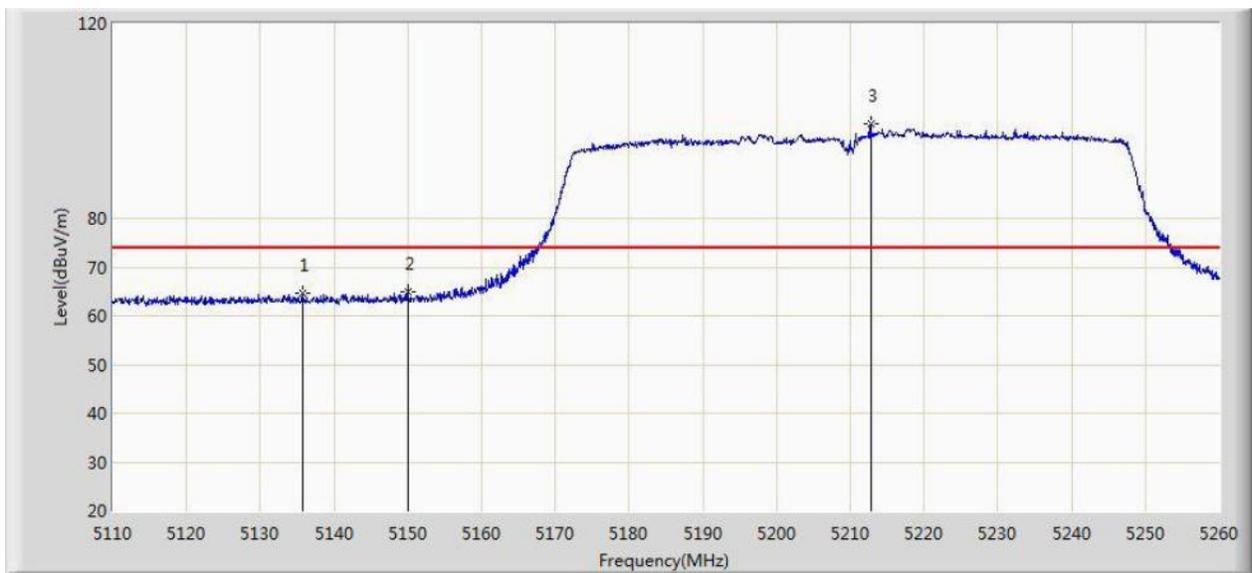


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5135.725	64.645	27.171	-9.355	74.000	37.474	PK
2			5150.000	65.006	27.554	-8.994	74.000	37.452	PK
3		*	5212.750	99.403	62.122	N/A	N/A	37.282	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:25
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5210MHz by 802.11ac-VHT80 Ant 1	

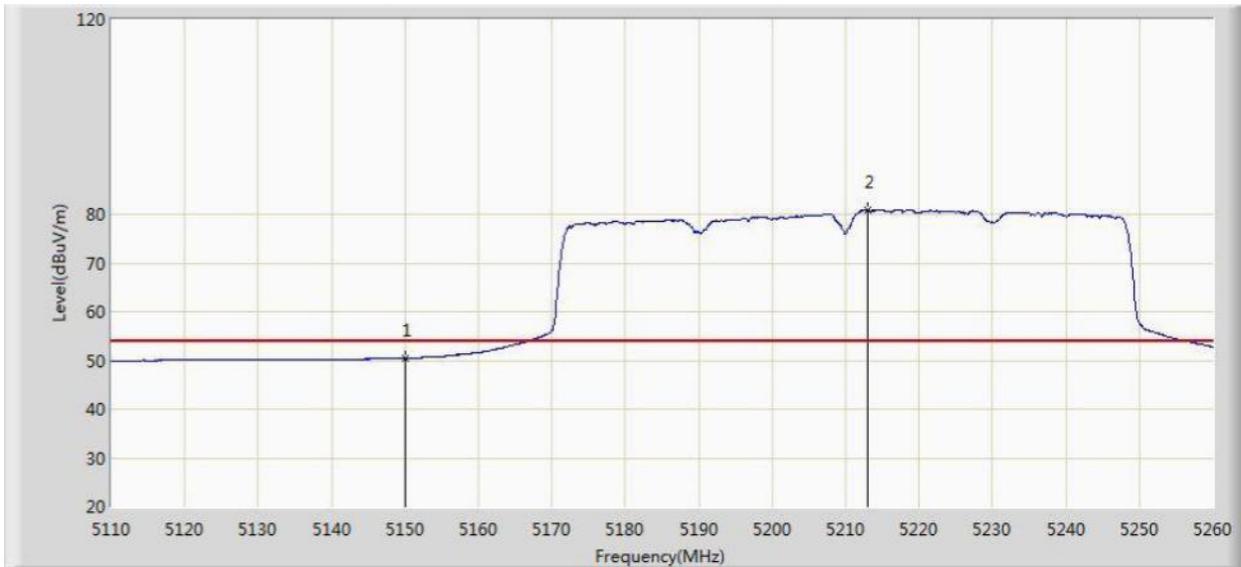


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	50.404	12.952	-3.596	54.000	37.452	AV
2		*	5213.050	80.738	43.458	N/A	N/A	37.281	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 16:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5290MHz by 802.11ac-VHT80 Ant 1	

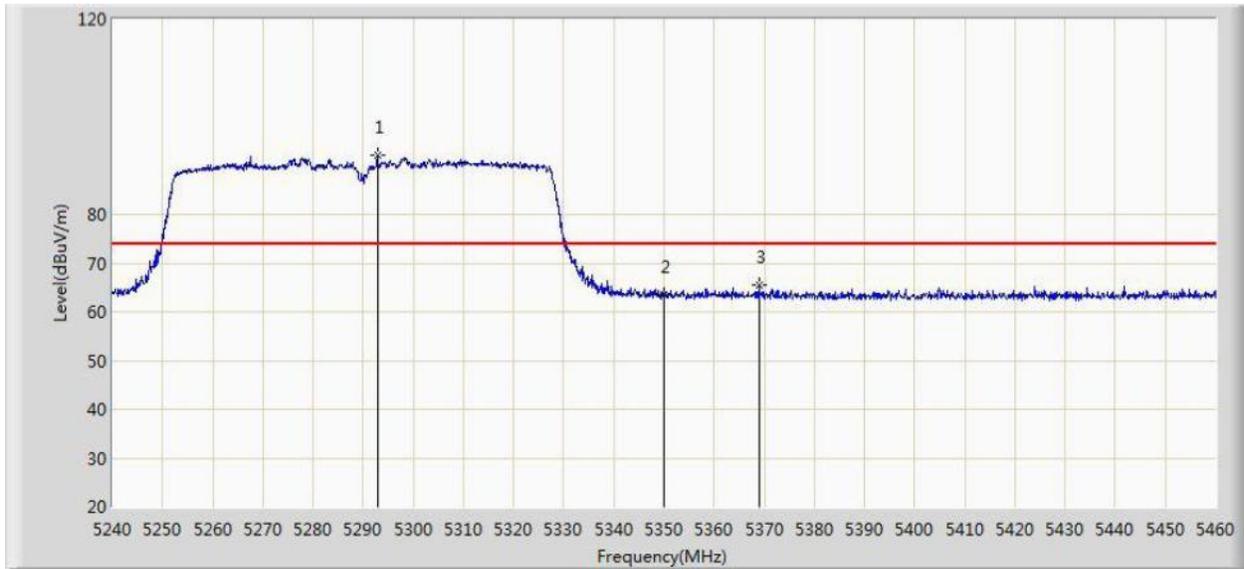


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5292.800	92.283	55.104	N/A	N/A	37.180	PK
2			5350.000	63.406	26.120	-10.594	74.000	37.286	PK
3			5368.920	65.511	28.173	-8.489	74.000	37.338	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 17:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5290MHz by 802.11ac-VHT80 Ant 1	

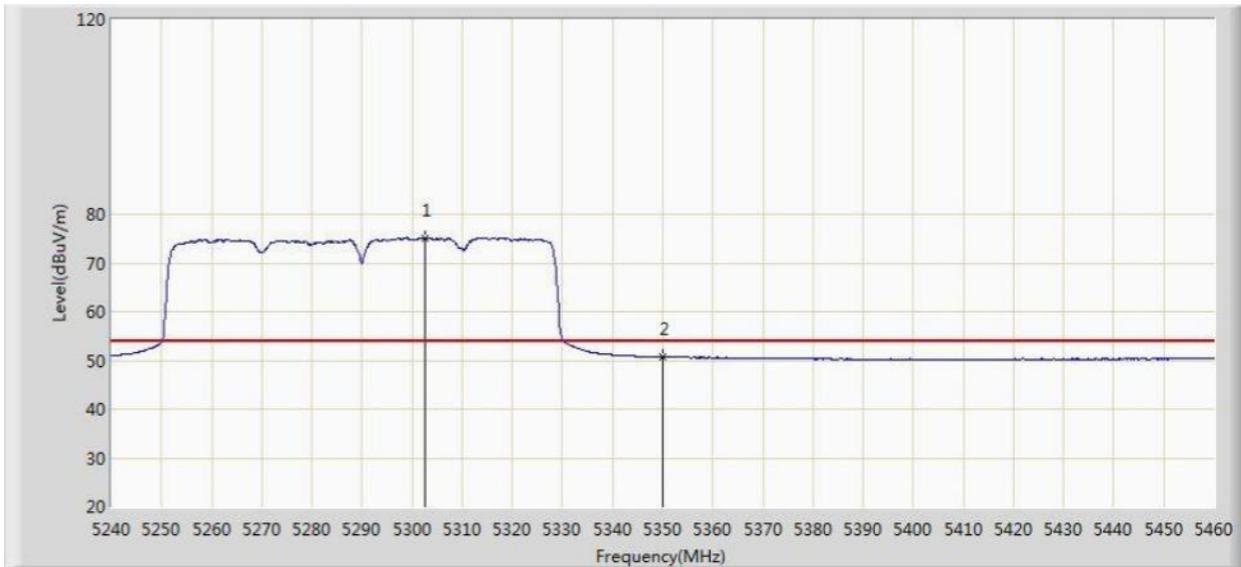


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5302.480	75.130	37.941	N/A	N/A	37.189	AV
2			5350.000	50.652	13.366	-3.348	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5290MHz by 802.11ac-VHT80 Ant 1	

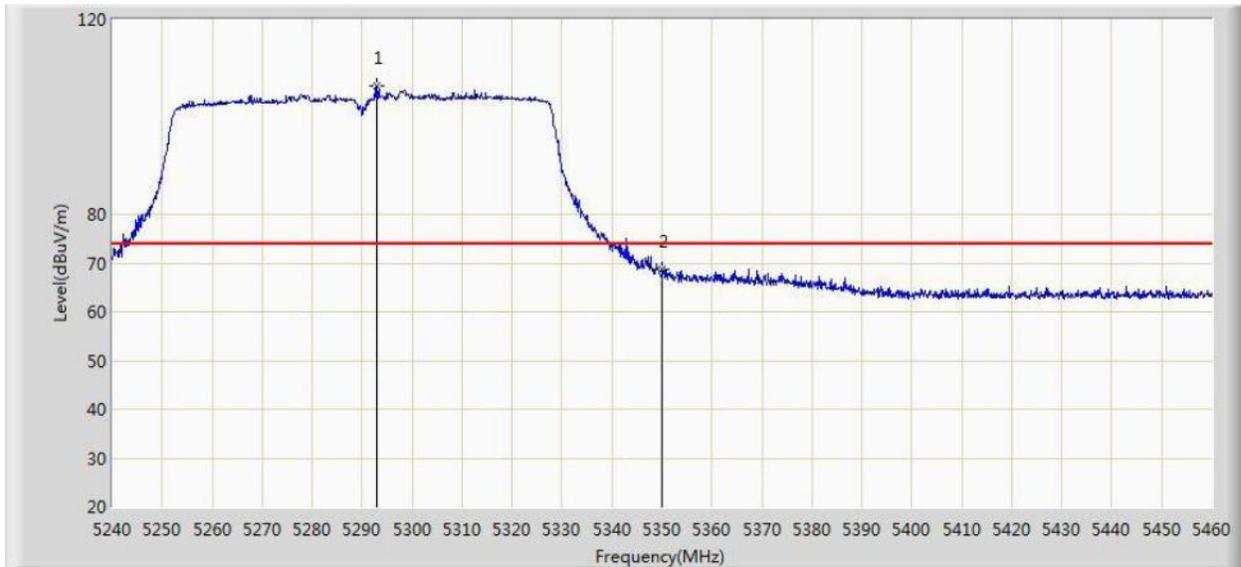


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5292.910	106.262	69.083	N/A	N/A	37.179	PK
2			5350.000	68.685	31.399	-5.315	74.000	37.286	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 17:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5290MHz by 802.11ac-VHT80 Ant 1	

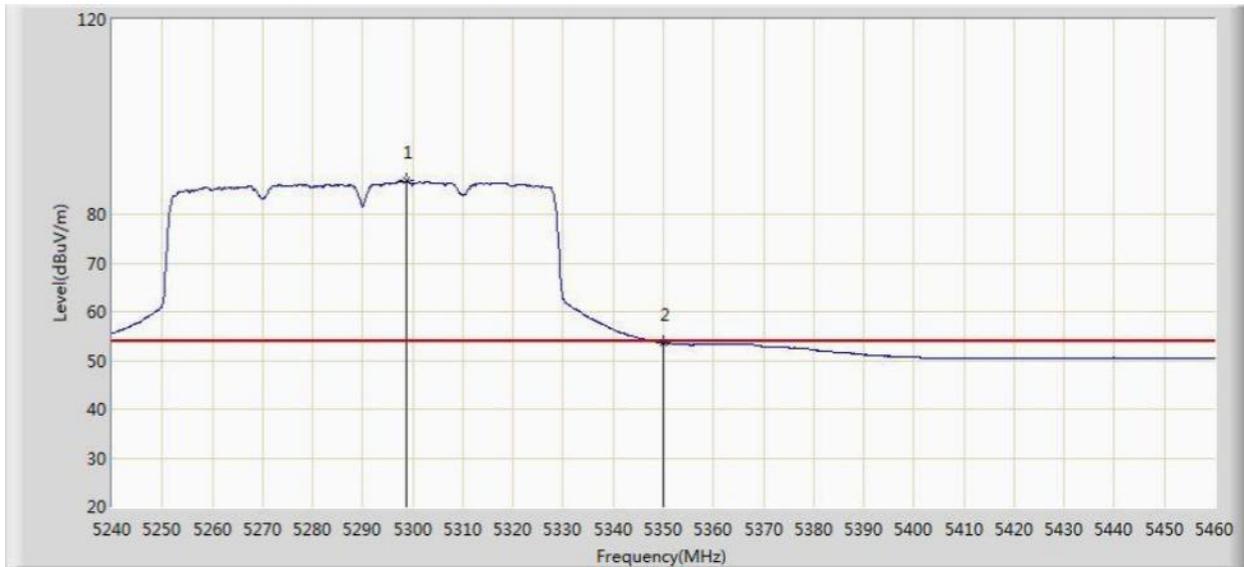


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.740	86.857	49.674	N/A	N/A	37.183	AV
2			5350.000	53.571	16.285	-0.429	54.000	37.286	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 17:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 1	

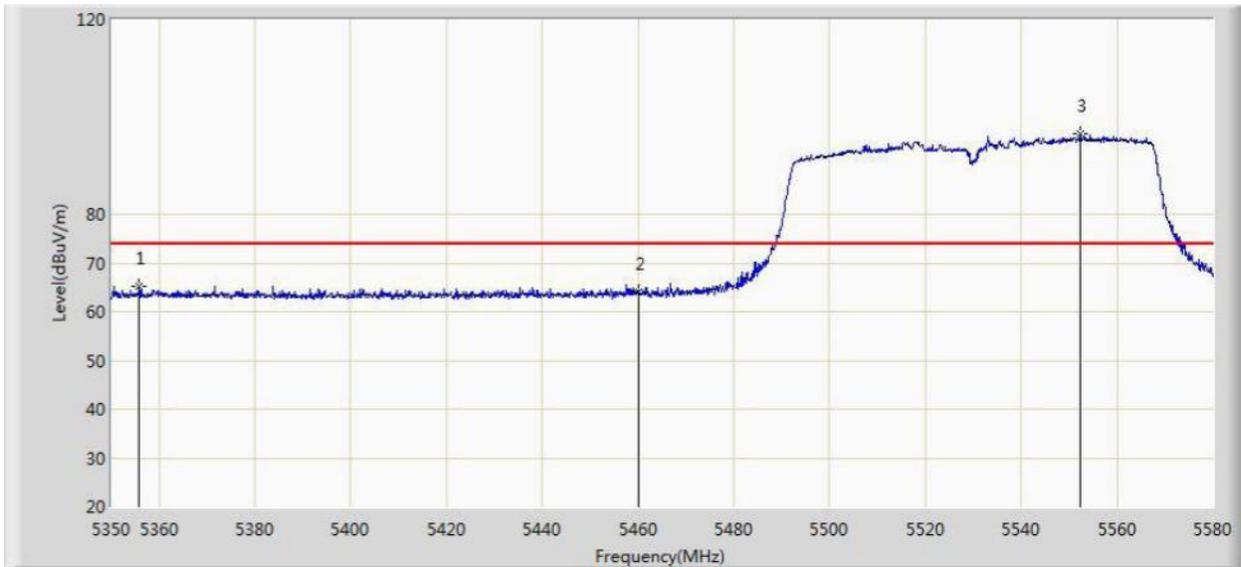


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5355.750	65.192	27.889	-8.808	74.000	37.302	PK
2			5460.000	64.166	26.603	-9.834	74.000	37.563	PK
3		*	5552.285	96.529	58.827	N/A	N/A	37.702	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 17:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 1	

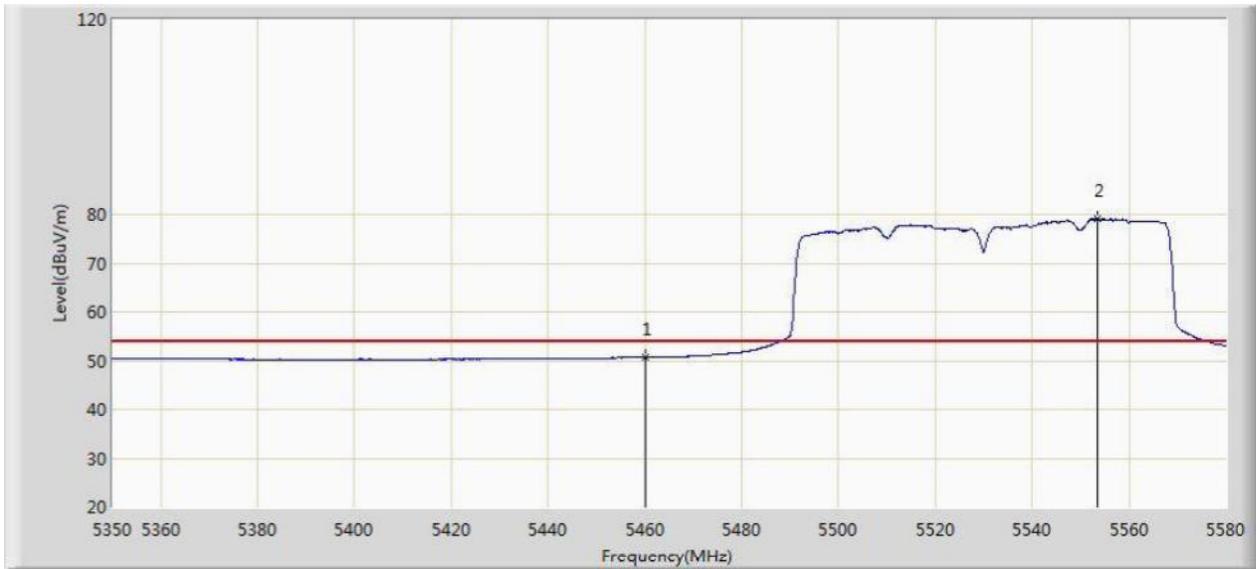


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	50.652	13.089	-3.348	54.000	37.563	AV
2		*	5553.435	79.017	41.314	N/A	N/A	37.703	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 17:12
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 1	

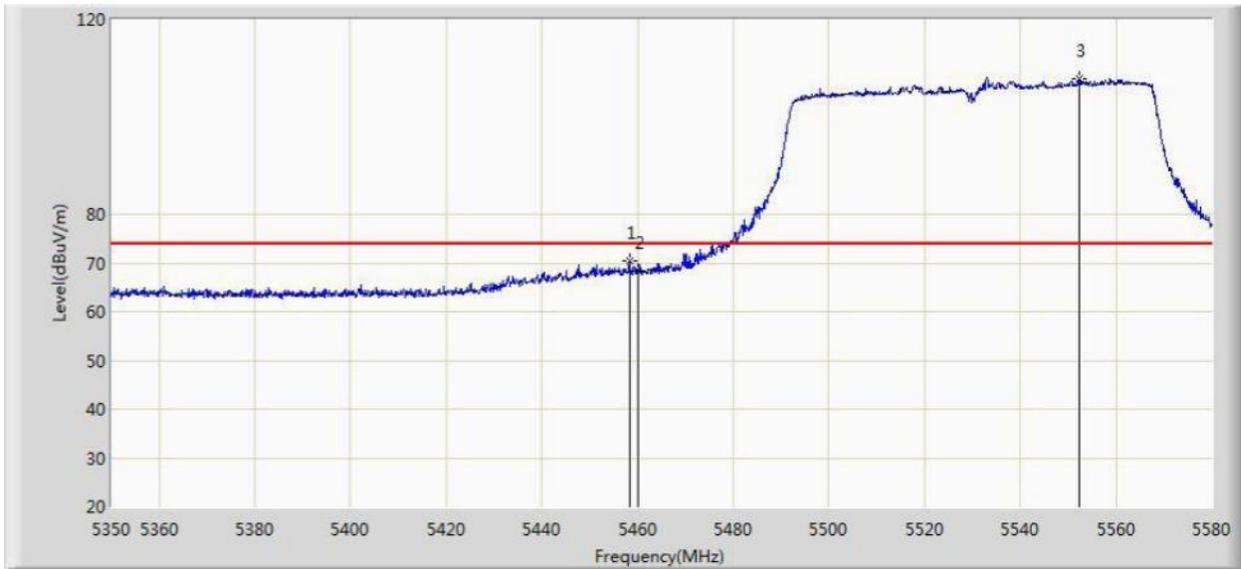


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.330	70.411	32.853	-3.589	74.000	37.558	PK
2			5460.000	68.380	30.817	-5.620	74.000	37.563	PK
3		*	5552.285	107.860	70.158	N/A	N/A	37.702	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/10 - 17:18
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5530MHz by 802.11ac-VHT80 Ant 1	

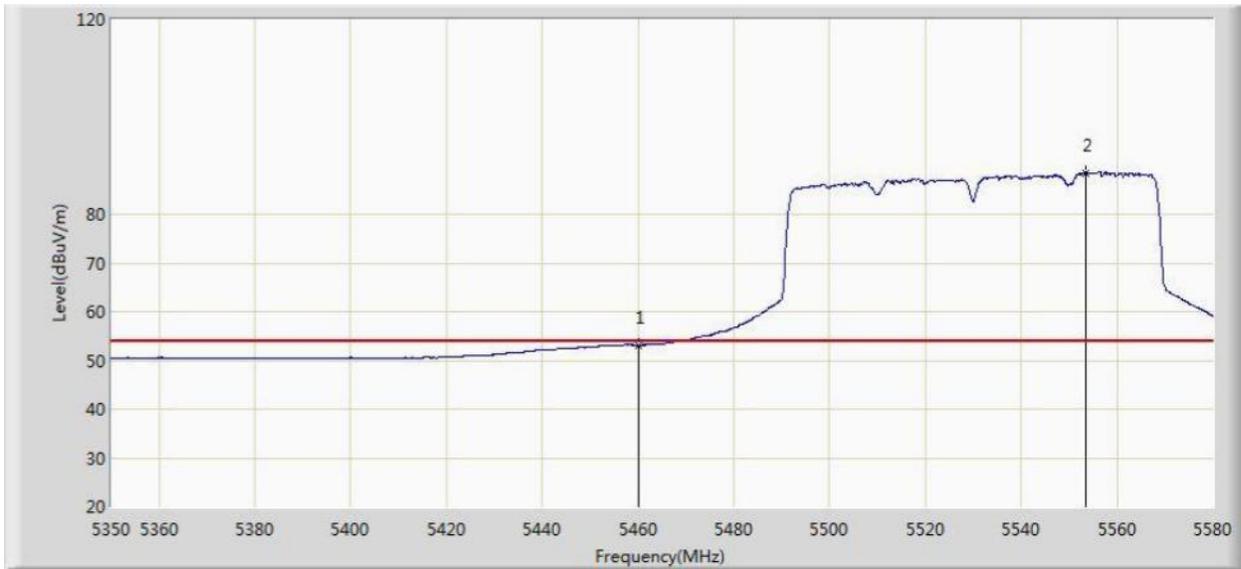


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	53.134	15.571	-0.866	54.000	37.563	AV
2		*	5553.435	88.540	50.837	N/A	N/A	37.703	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 1	

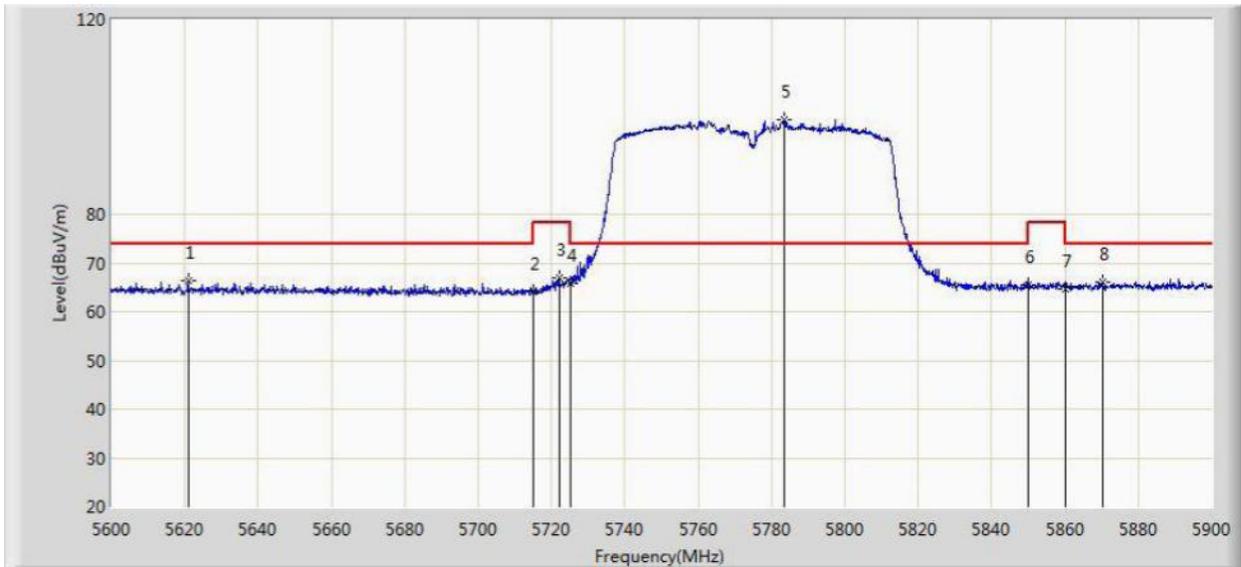


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5621.000	66.490	28.754	-7.510	74.000	37.737	PK
2			5715.000	64.131	26.182	-9.869	74.000	37.949	PK
3			5722.100	67.071	29.093	-11.129	78.200	37.978	PK
4			5725.000	65.689	27.699	-12.511	78.200	37.990	PK
5		*	5783.600	99.339	61.132	N/A	N/A	38.207	PK
6			5850.000	65.550	27.097	-12.650	78.200	38.454	PK
7			5860.000	64.763	26.285	-9.237	74.000	38.478	PK
8			5870.450	66.136	27.644	-7.864	74.000	38.491	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 1	

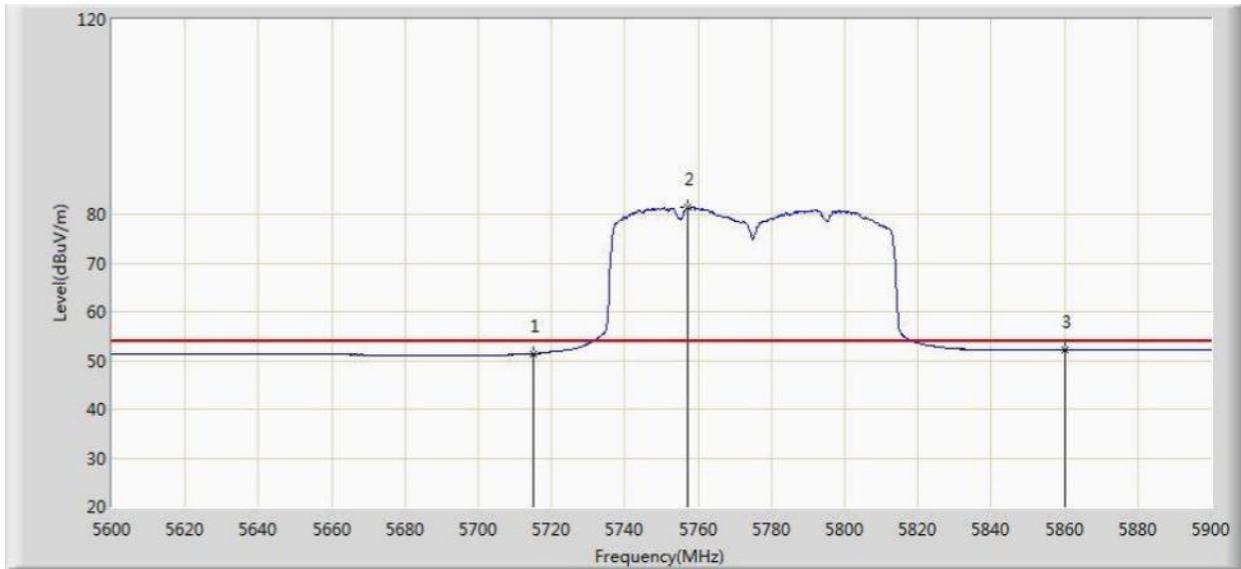


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	51.397	13.448	-2.603	54.000	37.949	AV
2		*	5757.200	81.345	43.215	N/A	N/A	38.129	AV
3			5860.000	52.111	13.633	-1.889	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 1	

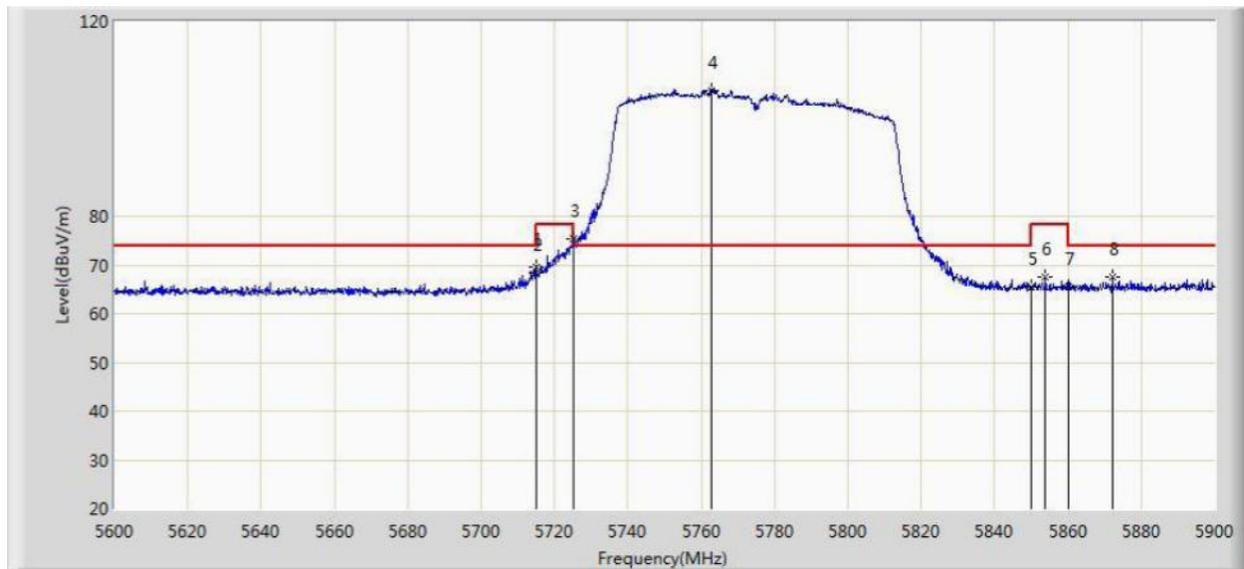


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5714.900	69.511	31.562	-4.489	74.000	37.948	PK
2			5715.000	68.511	30.562	-5.489	74.000	37.949	PK
3			5725.000	75.365	37.375	-2.835	78.200	37.990	PK
4		*	5762.600	105.901	67.753	N/A	N/A	38.147	PK
5			5850.000	65.528	27.075	-12.672	78.200	38.454	PK
6			5853.800	67.621	29.159	-10.579	78.200	38.462	PK
7			5860.000	65.395	26.917	-8.605	74.000	38.478	PK
8			5872.100	67.640	29.146	-6.360	74.000	38.494	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 6: Transmit at channel 5775MHz by 802.11ac-VHT80 Ant 1	

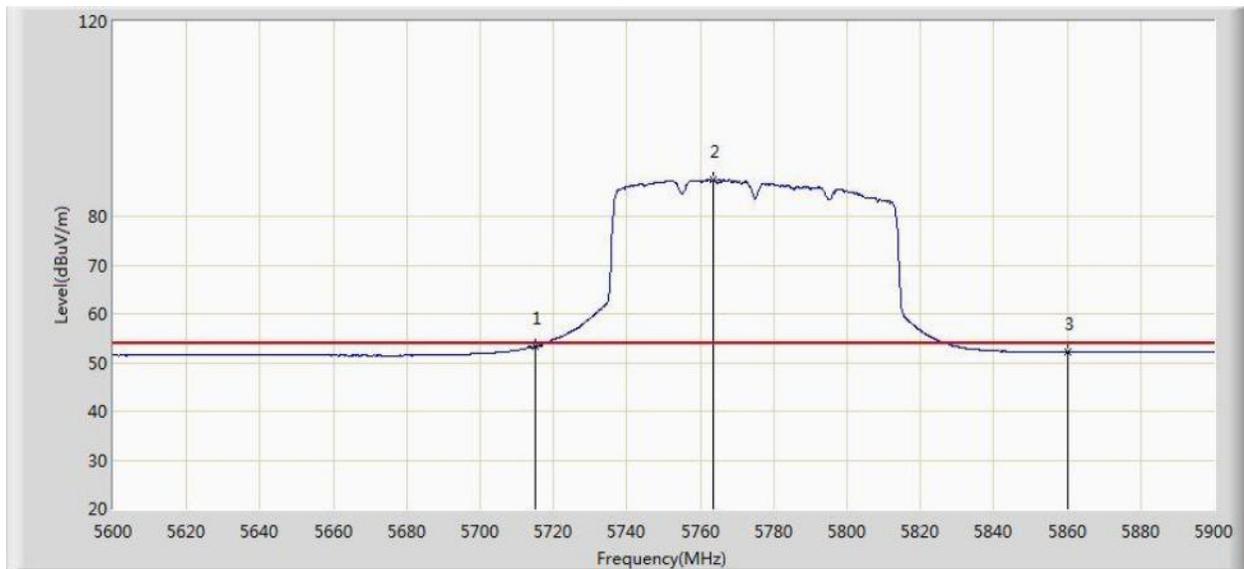


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5715.000	53.292	15.343	-0.708	54.000	37.949	AV
2		*	5763.650	87.551	49.401	N/A	N/A	38.150	AV
3			5860.000	52.271	13.793	-1.729	54.000	38.478	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC1	Time: 2015/01/09 - 13:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Roy Cheng
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Wireless LAN Access Point	Power: AC 120V/60Hz
Mode 1: Transmit at channel 5180MHz by 802.11a Ant 2	

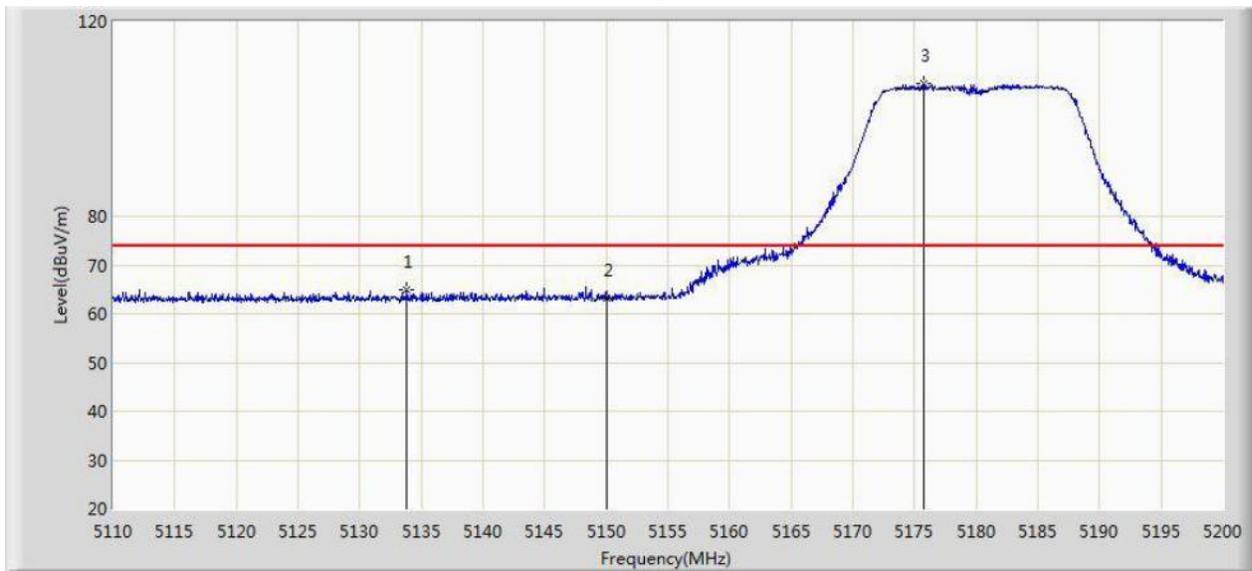

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5133.805	65.070	27.594	-8.930	74.000	37.476	PK
2			5150.000	63.222	25.770	-10.778	74.000	37.452	PK
3		*	5175.700	107.117	69.734	N/A	N/A	37.384	PK

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)