

# FCCDFS Test Report

## FCC ID:QISAP8130DN

This report concerns (check one):  Original Grant  Class II Change

**Project No.** : 1407C034B  
**Equipment** : Outdoor Wireless LAN Access Point  
**Model Name** : AP8130DN  
**Applicant** : Huawei Technologies Co.,Ltd.  
**Address** : Administration Building, Huawei Base, Bantian,  
Longgang District ,Shenzhen 518129, P.R.China


**Date of Receipt** : Mar. 09, 2015  
**Date of Test** : Mar. 09, 2015 ~ Jun. 08, 2015  
**Issued Date** : Jun. 10, 2015  
**Tested by** : BTL Inc.

**Testing Engineer** :



(David Mao)

**Technical Manager** :



(Leo Hung)

**Authorized Signatory** :



(Steven Lu)

# **B T L I N C .**

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan,  
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . EUT INFORMATION</b>	<b>6</b>
2.1 EUT SPECIFICATION TABLE	6
2.4 EUT MAXIMUM AND MINIMUM E.I.R.P. POWER	8
<b>3 .U-NII DFS RULE REQUIREMENTS</b>	<b>9</b>
3.1 WORKING MODES AND REQUIRED TEST ITEMS	9
3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS	10
<b>4 . TEST INSTRUMENTS</b>	<b>13</b>
<b>5 .EMC EMISSION TEST</b>	<b>14</b>
5.1 DFS MEASUREMENT SYSTEM:	14
5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:	16
5.3 DEVIATION FROM TEST STANDARD	16
<b>6 . TEST RESULTS</b>	<b>17</b>
6.1 SUMMARY OF TEST RESULT	17
6.2 DETELED TEST RESULTS	18
6.2.1 TEST MODE: DEVICE OPERATING IN MASTER MODE.	18
6.2.2 DFS DETECTION THRESHOLD	18
6.2.3 CHANNEL AVAILABILITY CHECK TIME	24
6.2.4CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC	33
6.2.5 NON- OCCUPANCY PERIOD	60
6.2.6 UNIFORM SPREADING	62
6.2.7 U-NII DETECTION BANDWIDTH	62

### REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-4-1407C034B	Original Issue.	Jun. 10, 2015

## 1. CERTIFICATION

Equipment : Outdoor Wireless LAN Access Point  
Brand Name : HUAWEI  
Model Name : AP8130DN  
Applicant : Huawei Technologies Co.,Ltd.  
Manufacturer : Huawei Technologies Co.,Ltd.  
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen 518129, P.R.China  
Factory : Huawei Technologies Co.,Ltd.  
Address : Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.China  
Date of Test: : Mar. 09, 2015 ~ Jun. 08, 2015  
Test Sample : ENGINEERING SAMPLE  
Standard(s) : FCC Part 15, Subpart E (Section 15.407)  
FCC KDB 789033 D02 General UNII Test Procedures New Rules v01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-4-1407C034B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**Test result included in this report is only for the 2.4GHz and 5GHz module which is support 2.4GHz and 5GHz.**

## 2. EUT INFORMATION

### 2.1 EUT SPECIFICATION TABLE

Table 1: Specification of EUT

<b>Product name</b>	Outdoor Wireless LAN Access Point
<b>Brand Name</b>	HUAWEI
<b>Model</b>	AP8130DN
<b>FCC ID</b>	QISAP8130DN
<b>Operational Mode</b>	Master
<b>Operating Frequency Range</b>	5260~5320MHz&5500~5700MHz
<b>Modulation</b>	OFDM

**Note:** This device was functioned as a  Master  Slave device during the DF  
This device supports bridge mode and mesh mode.

### 2.2 DESCRIPTION OF AVAILABLE ANTENNAS TO THE EUT

Antenna Specification:

The product has 2 group antenna

#### Group 1 Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
A	Nippon Antenna	C15G14Z100BY	External Antenna	N-type	8	5G
B	Nippon Antenna	C15G14Z100BY	External Antenna	N-type	8	5G
C	Nippon Antenna	C15G14Z100BY	External Antenna	N-type	8	5G

#### Group 2 Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
A	pctel	MHODB24580407NM-LC	External Antenna	N-type	8	5G
B	pctel	MHODB24580407NM-LC	External Antenna	N-type	8	5G
C	pctel	MHODB24580407NM-LC	External Antenna	N-type	8	5G

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and receivers (3T3R).
2. ANT B for 1TX was found to be the worst case and recorded.

### 2.3 CONDUCTED OUTPUT POWER AND EIRP POWER

TABLE 3: THE CONDUCTED OUTPUT POWER LIST

TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5260~5320	21.92	155.60
5500~5700	21.96	157.04

TX (11n 40MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5270~5310	19.95	88.86
5510~5670	19.45	88.11

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5290	14.34	27.16
5530	16.40	43.65

## 2.4 EUT MAXIMUM AND MINIMUM E.I.R.P. POWER

TABLE 4: THE MAX EIRP LIST

TX (11a)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5260~5320	29.92	981.75
5500~5700	29.96	990.83

TX (11n40MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5270~5310	27.95	623.74
5510~5670	27.45	555.90

TX (11ac 80 MHz)

FREQUENCY BAND (MHz)	MAX. POWER	
	OUTPUT POWER(dBm)	OUTPUT POWER(mW)
5290	22.34	171.40
5530	24.40	275.42

### 3.U-NII DFS RULE REQUIREMENTS

#### 3.1 WORKING MODES AND REQUIRED TEST ITEMS

The manufacturer shall state whether the UUT is capable of operating as a Master and/or a Client. If the UUT is capable of operating in more than one operating mode then each operating mode shall be tested separately. See tables 1 and 2 for the applicability of DFS requirements for each of the operational modes.

Table 5: Applicability of DFS requirements prior to use a channel

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
Non-Occupancy Period	✓	Not required	✓
DFS Detection Threshold	✓	Not required	✓
Channel Availability Check Time	✓	Not required	Not required
Uniform Spreading	✓	Not required	Not required
U-NII Detection Bandwidth	✓	Not required	✓

Table 6: Applicability of DFS requirements during normal operation.

Requirement	Operational Mode		
	Master	Client without radar detection	Client with radar detection
DFS Detection Threshold	✓	Not required	✓
Channel Closing Transmission Time	✓	✓	✓
Channel Move Time	✓	✓	✓
U-NII Detection Bandwidth	✓	Not required	✓

### 3.2 TEST LIMITS AND RADAR SIGNAL PARAMETERS

#### DETECTION THRESHOLD VALUES

Table 7: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection.

Maximum Transmit Power	Value (See Notes 1 and 2)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

**Note 1:** This is the level at the input of the receiver assuming a 0 dBi receive antenna.

**Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

**Note 3:** EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911D01.

Table 8: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the UNII 99% transmissionpower bandwidth. SeeNote 3.

**Note 1:** Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

## PARAMETERS OF DFS TEST SIGNALS

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 9: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \begin{array}{l} \left( \frac{1}{360} \right) \\ \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
<b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

Table 10: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

Table 11: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

#### 4. TEST INSTRUMENTS

Table 1: Test instruments list.

DESCRIPTION	MANUFACTURER	MODEL NO.	Serial No	Calibration Until
EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
Signal Generator	Agilent	E4438C	MY49071316	Mar. 28, 2016
POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Mar. 17, 2016
POWER SPLITTER	Mini-Circuits	ZN4PD1-63-S+	SF9335D1045-1	Mar.04, 2016
Attenuator	WOKEN	6SM3502	VAS1214NL	Mar. 10, 2016
Spectrum Analyzer	R&S	FSL 6	100423	Nov. 02, 2015


Note: Calibration interval of instruments listed above is one year.

## 5.EMC EMISSION TEST

### 5.1DFS MEASUREMENT SYSTEM:

#### CONDUCTED METHOD SYSTEM BLOCK DIAGRAM

##### Master Conducted Measurement

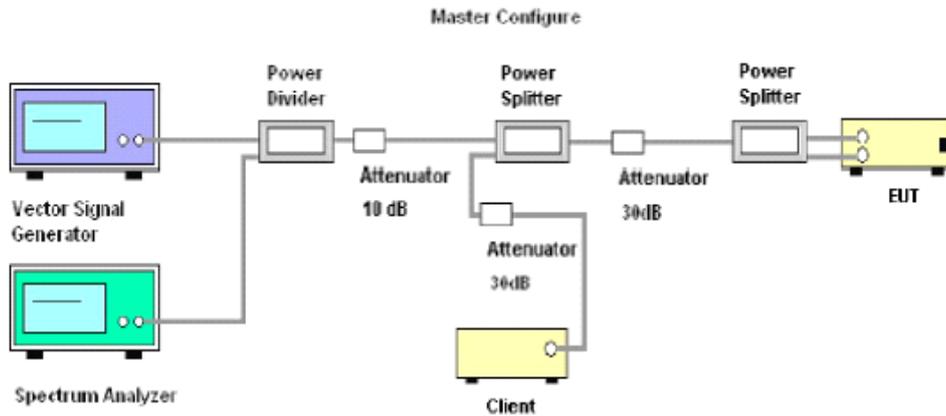

#### SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), additional combiner/dividers are inserted between the Master Combiner/Divider and the pad connected to the Master Device (and/or between the Slave Combiner/Divider and the pad connected to the Slave Device). Additional pads are utilized such that there is one pad at each RF port on each EUT.


### 5.2 CALIBRATION OF DFS DETECTION THRESHOLD LEVEL:

A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected in place of the master device and the signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of  $-62$  dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. Measure the amplitude and calculate the difference from  $-62$  dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of  $-62$  dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.

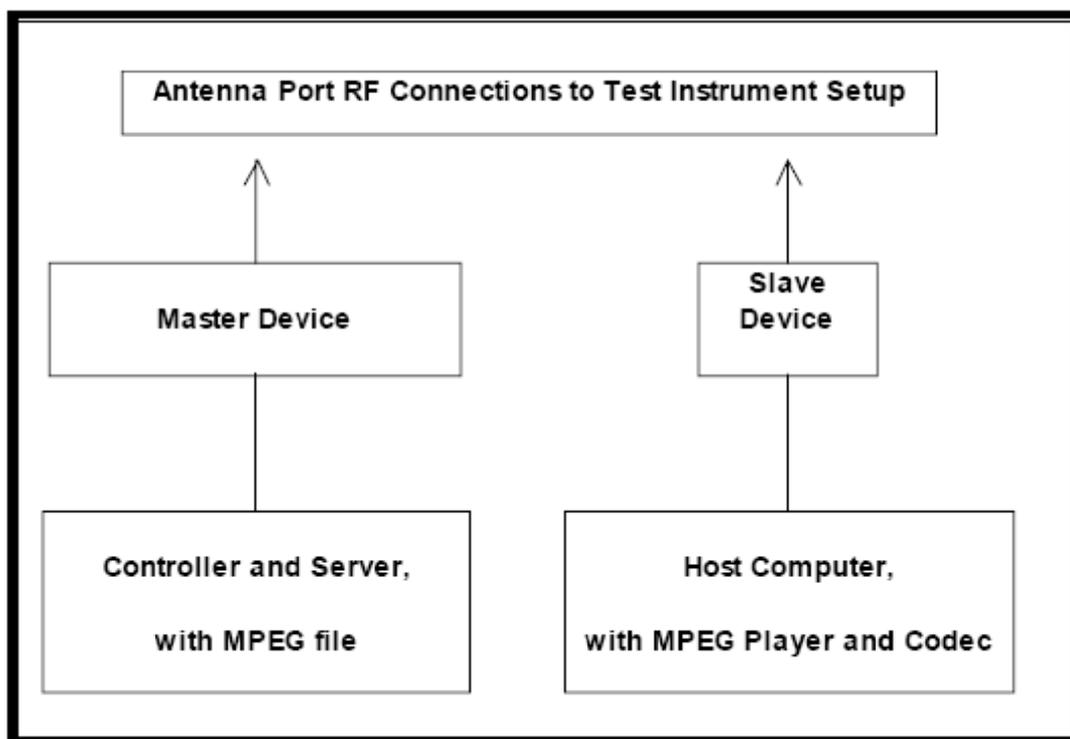

### 5.3 DEVIATION FROM TEST STANDARD

No deviation.

## 6. TEST RESULTS

### 6.1 SUMMARY OF TEST RESULT

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Applicable	Pass
15.407	Channel Availability Check Time	Applicable	Pass
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	Uniform Spreading	Applicable	Pass
15.407	U-NII Detection Bandwidth	Applicable	Pass

## 6.2 DETELED TEST RESULTS

Clause	Test Parameter	Remarks	Pass/Fail
15.407	DFS Detection Threshold	Applicable	Pass
15.407	Channel Availability Check Time	Applicable	Pass
15.407	Channel Move Time	Applicable	Pass
15.407	Channel Closing Transmission Time	Applicable	Pass
15.407	Non- Occupancy Period	Applicable	Pass
15.407	Uniform Spreading	Applicable	Pass
15.407	U-NII Detection Bandwidth	Applicable	Pass

### 6.2.1 TEST MODE: DEVICE OPERATING IN MASTER MODE.

Master with injection at the Master. (Radar Test Waveforms are injected into the Master)


### 6.2.2 DFS DETECTION THRESHOLD

Calibration:


For a detection threshold level of -64dBm and the Master antenna gain is 8dBi, required detection threshold is -56 dBm ( $= -64+8$ ).

Note: Maximum Transmit Power is more than 200 milliwatt in this report, so detection threshold level is -64dBm (please refer to Table 7 [page 9]).


### Radar Signal 0

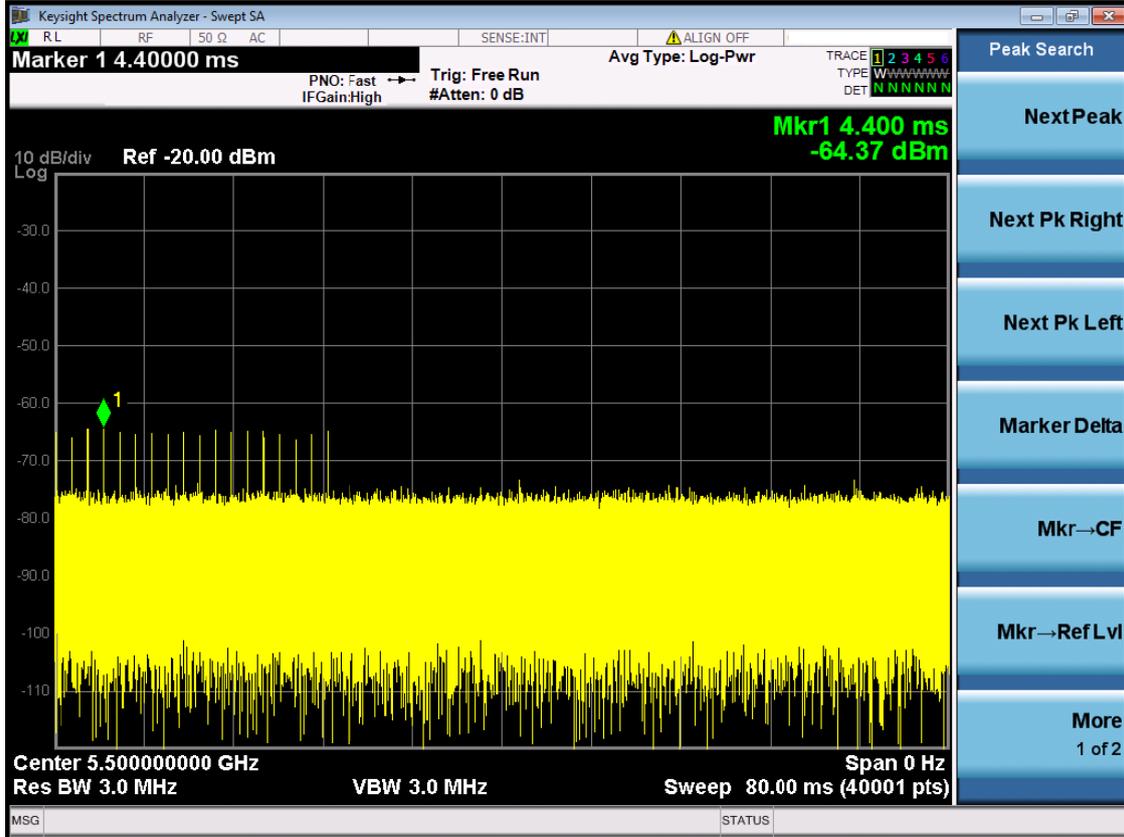


**Radar Signal 1-A**

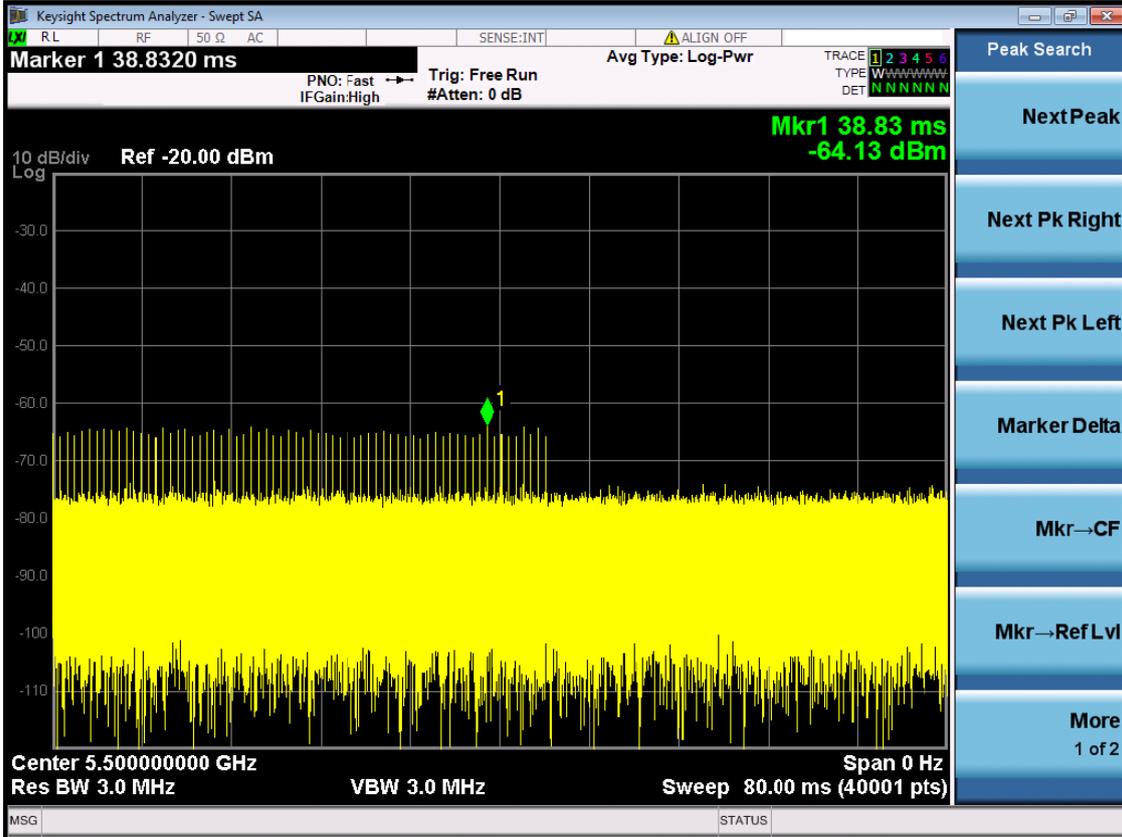


**Radar Signal 1-B**

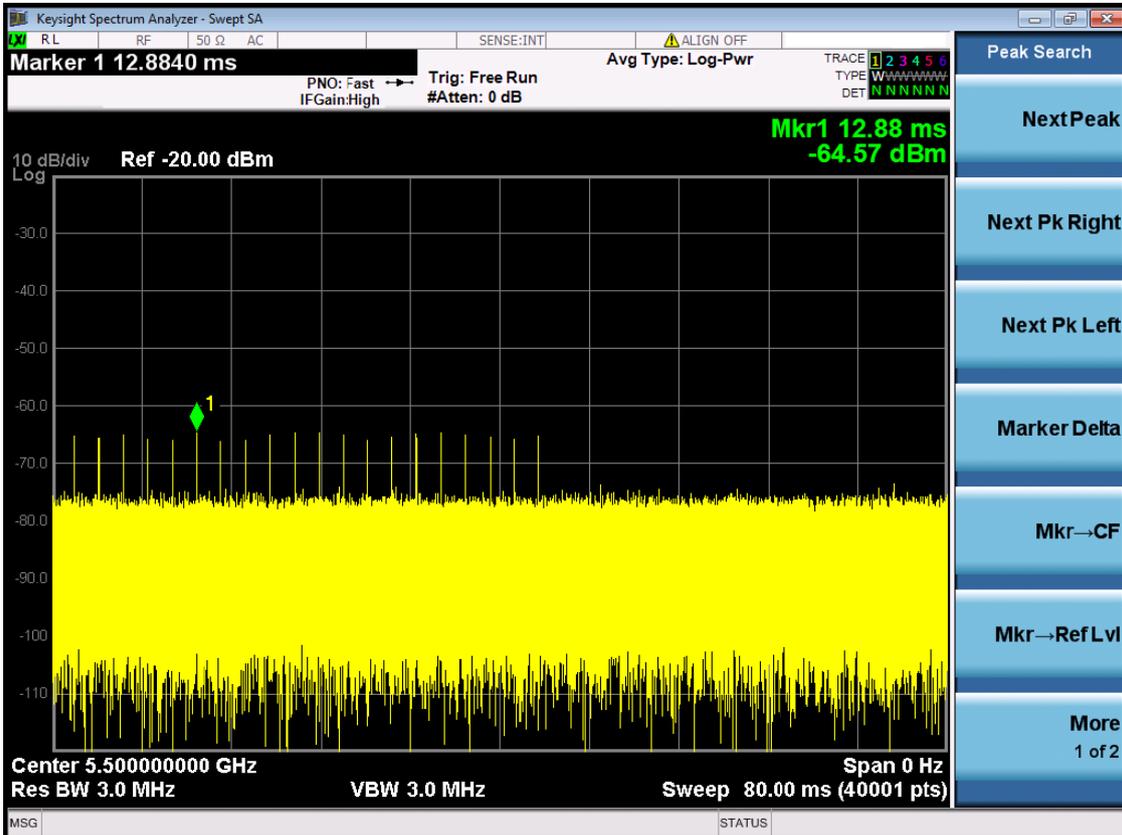


### Radar Signal 2

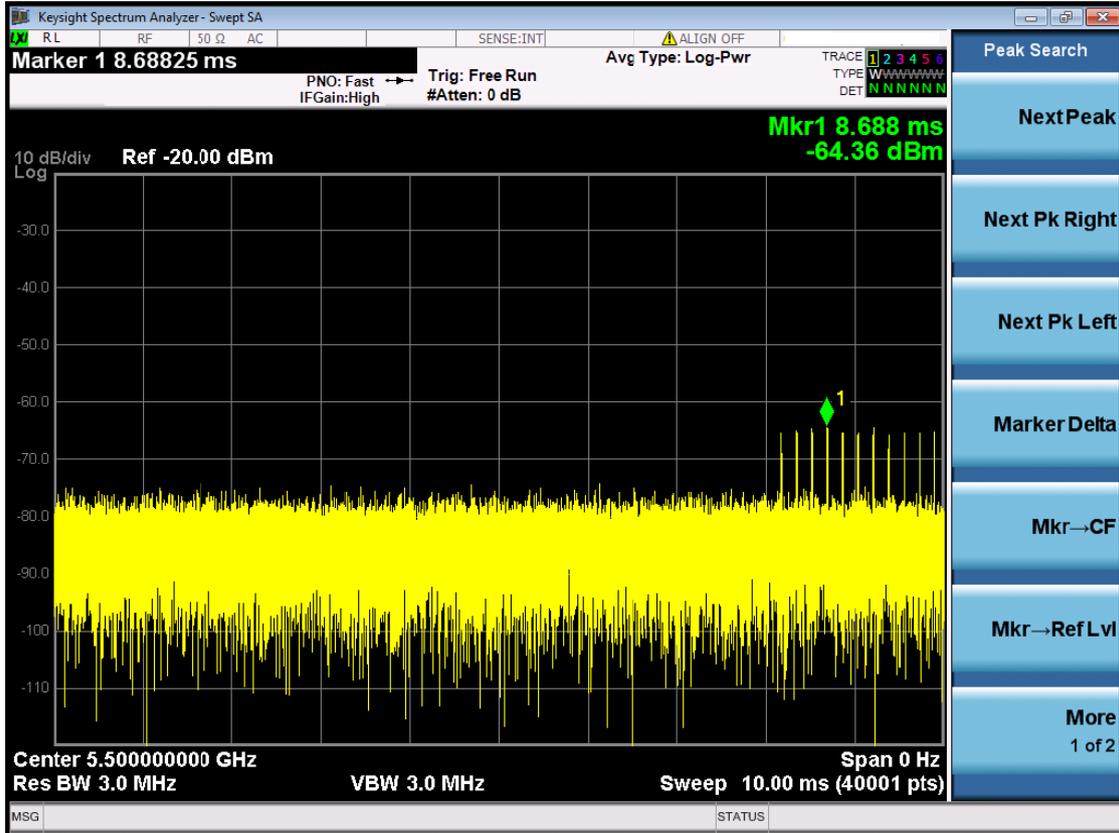


### Radar Signal 3

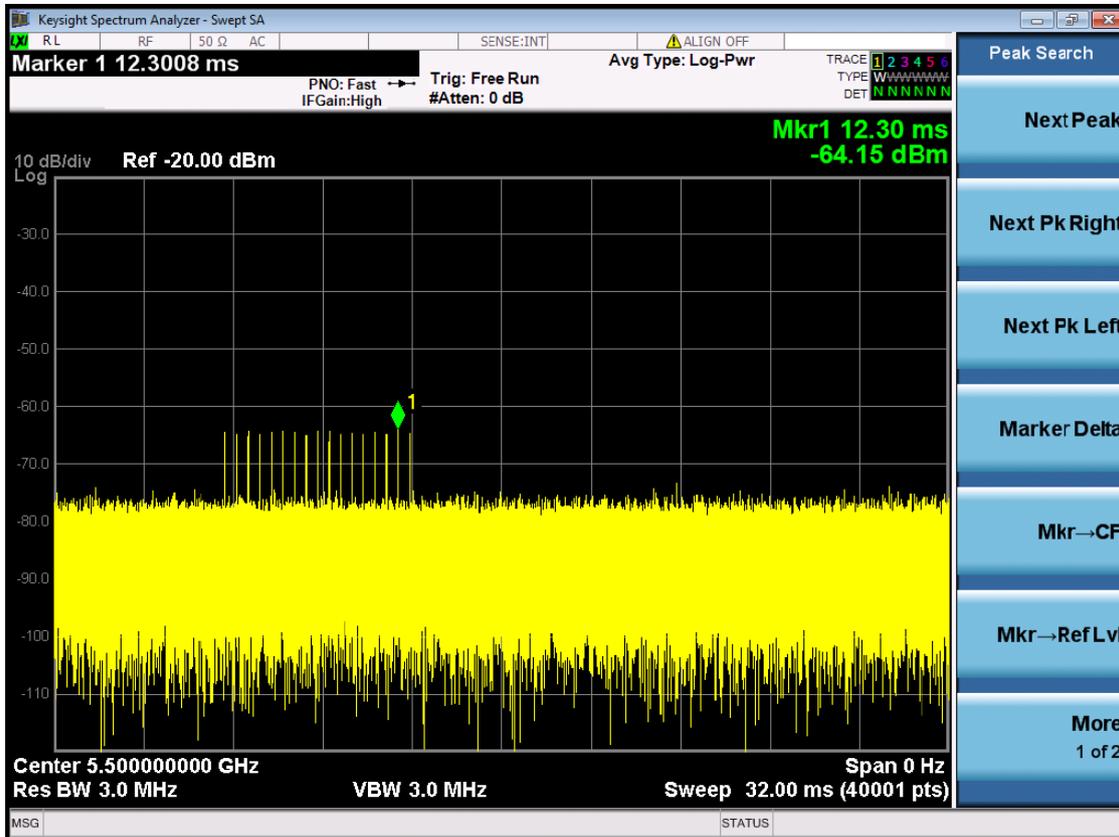


### Radar Signal 4

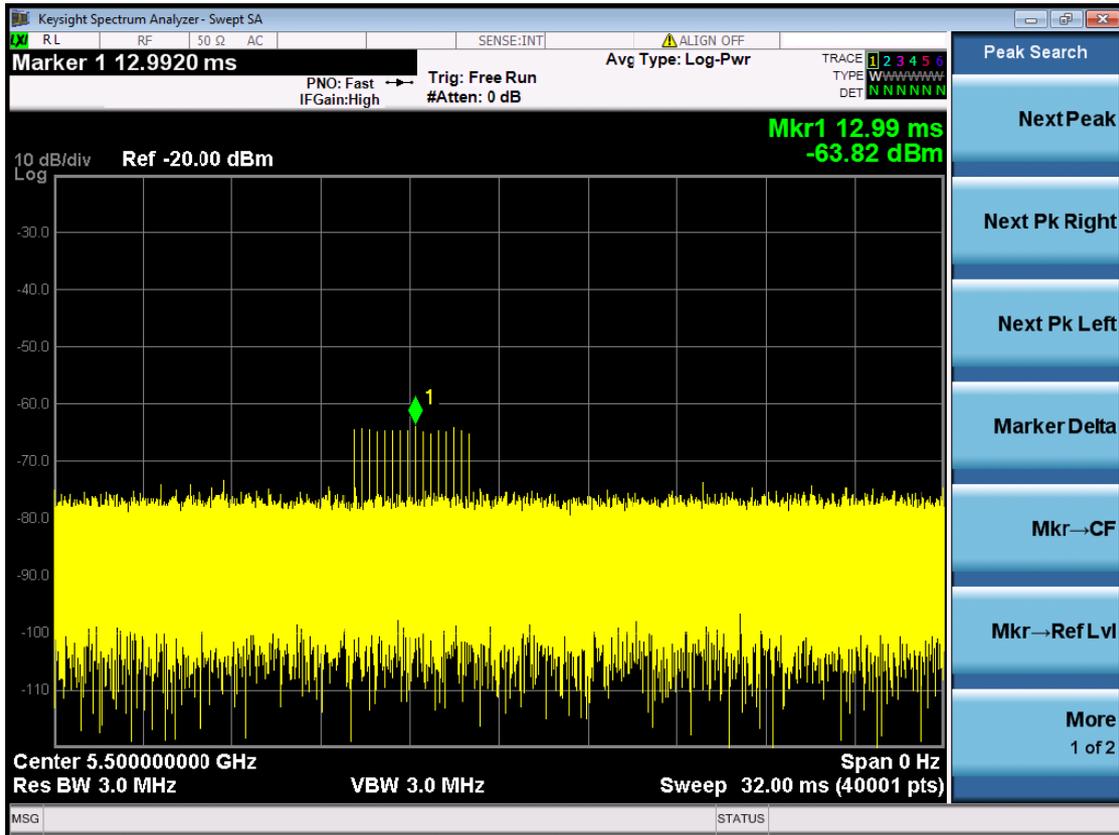

### Radar Signal 5

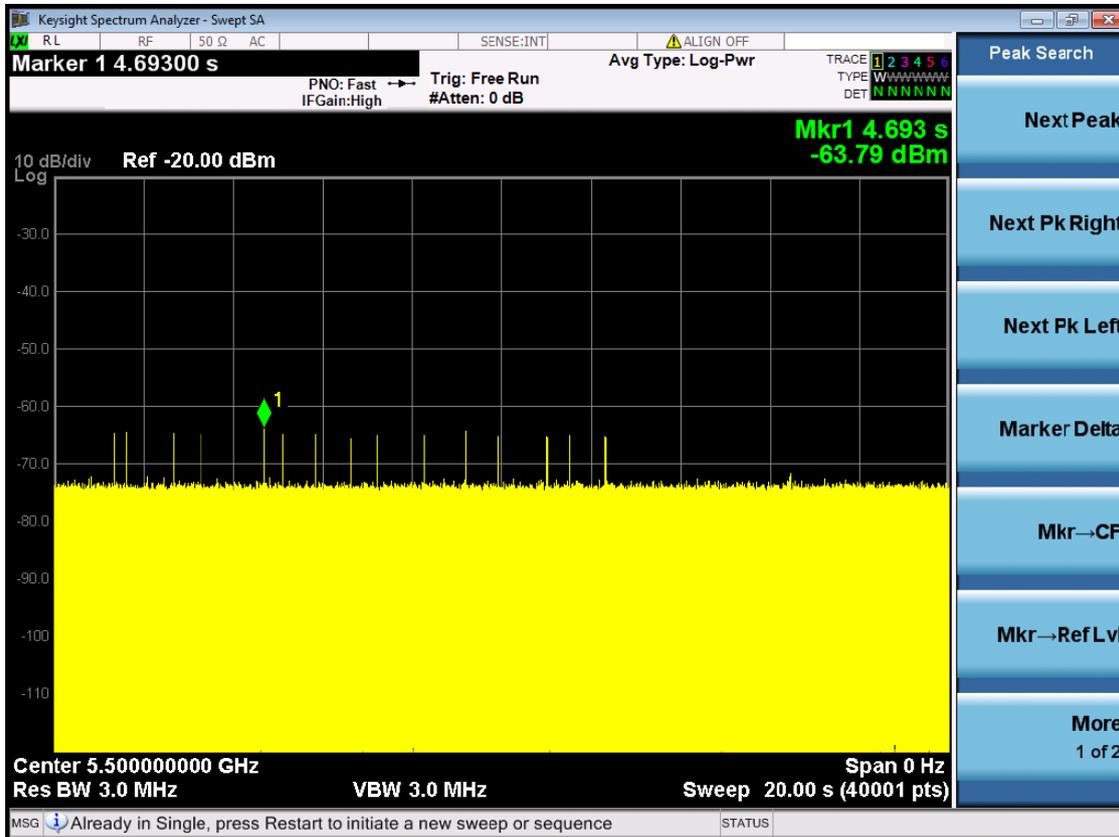

### Radar Signal 6

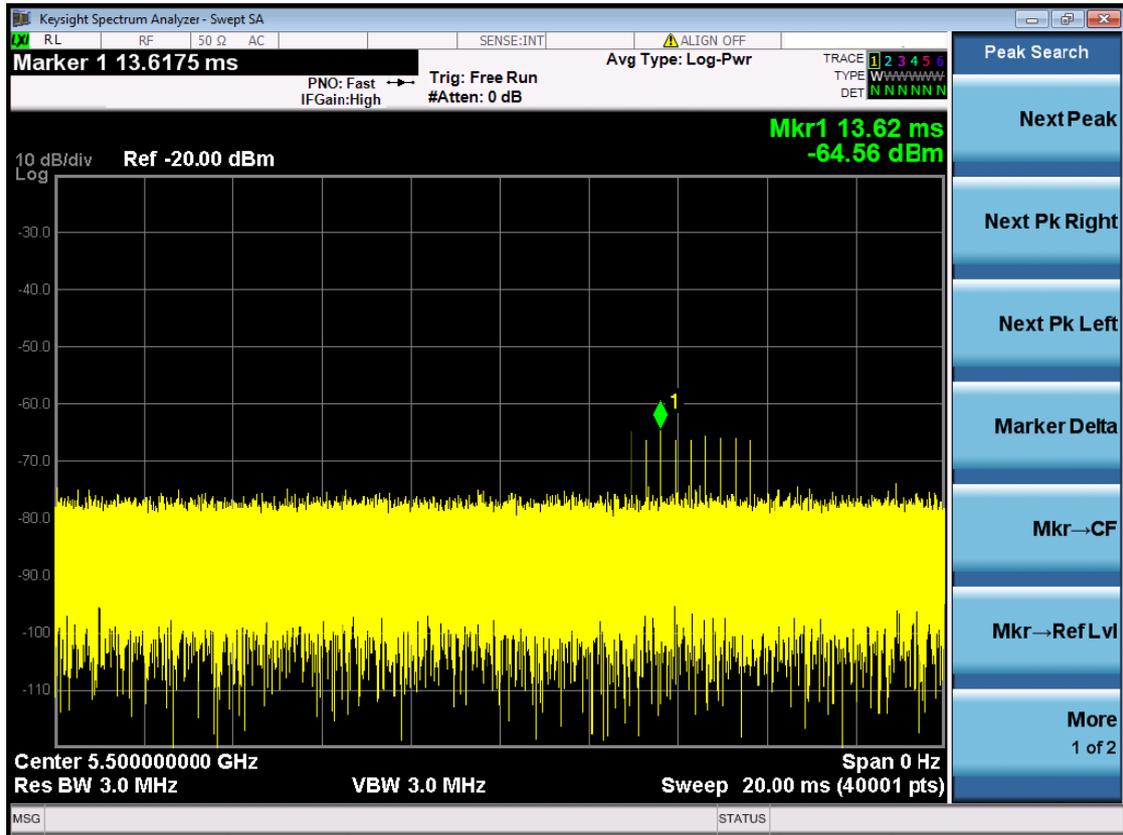


### 6.2.3 CHANNEL AVAILABILITY CHECK TIME

If the UUT successfully detected the radar burst, it should be observed as the UUT has no transmissions occurred until the UUT starts transmitting on another channel.

#### 11aMode

Initial Channel Availability Check Time

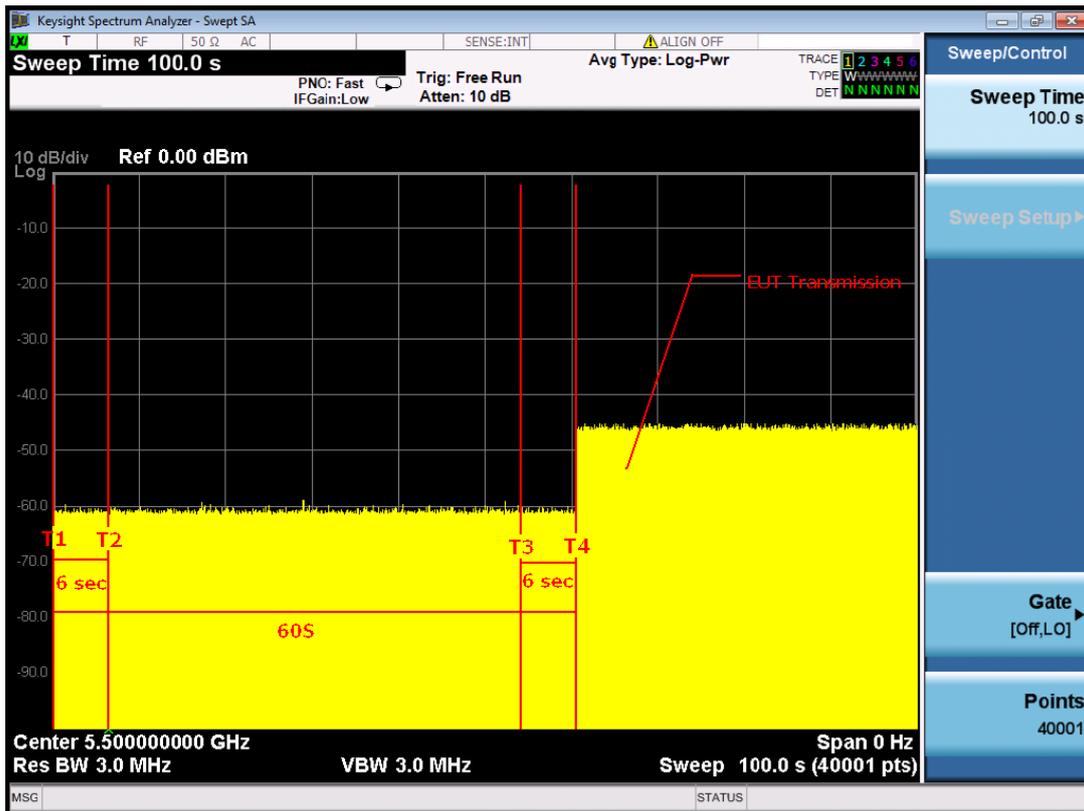


**Note:** T1 denotes the end of power-up time period is 6 second.

T4 denotes the end of Channel Availability Check time is 66 second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.

### 11a Mode

Radar Burst at the Beginning of the Channel Availability Check Time

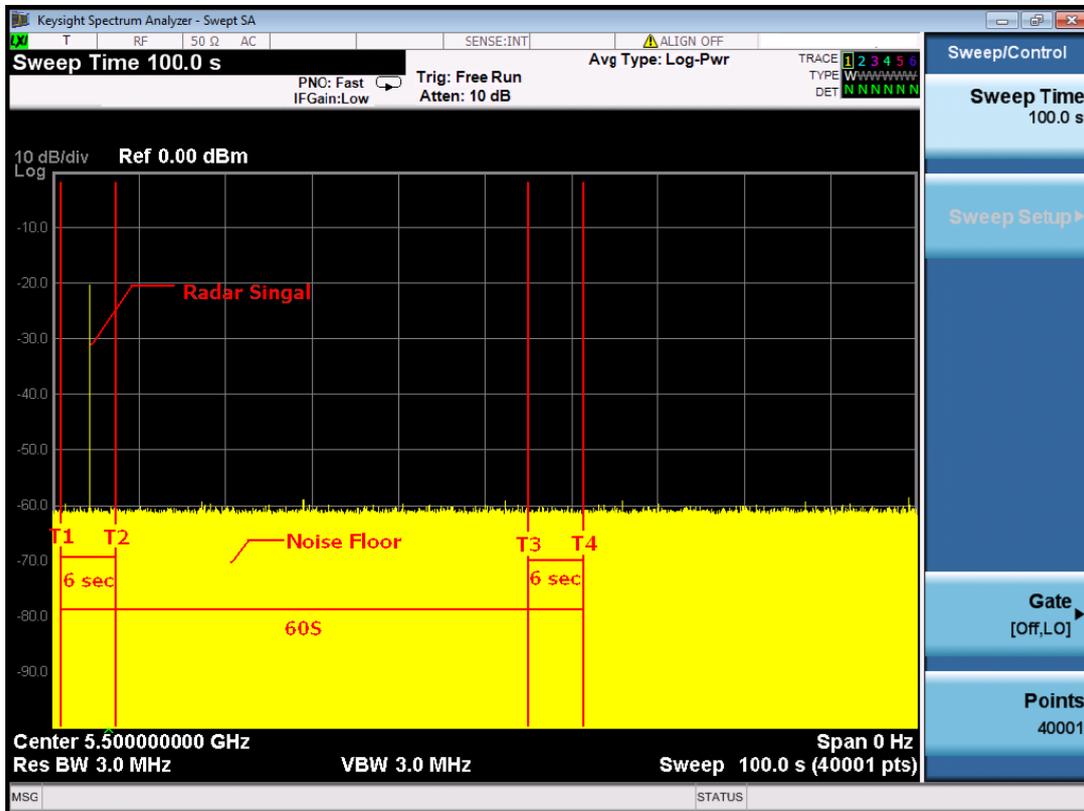


**Note:** T1 denotes the end of power up time period is 6 second.  
 T2 denotes 12 second. the radar burst was commenced within a 6 second window starting from the end of power-up sequence.  
 T4 denotes the 66 second.



### 11n 40MHz Mode


#### Initial Channel Availability Check Time

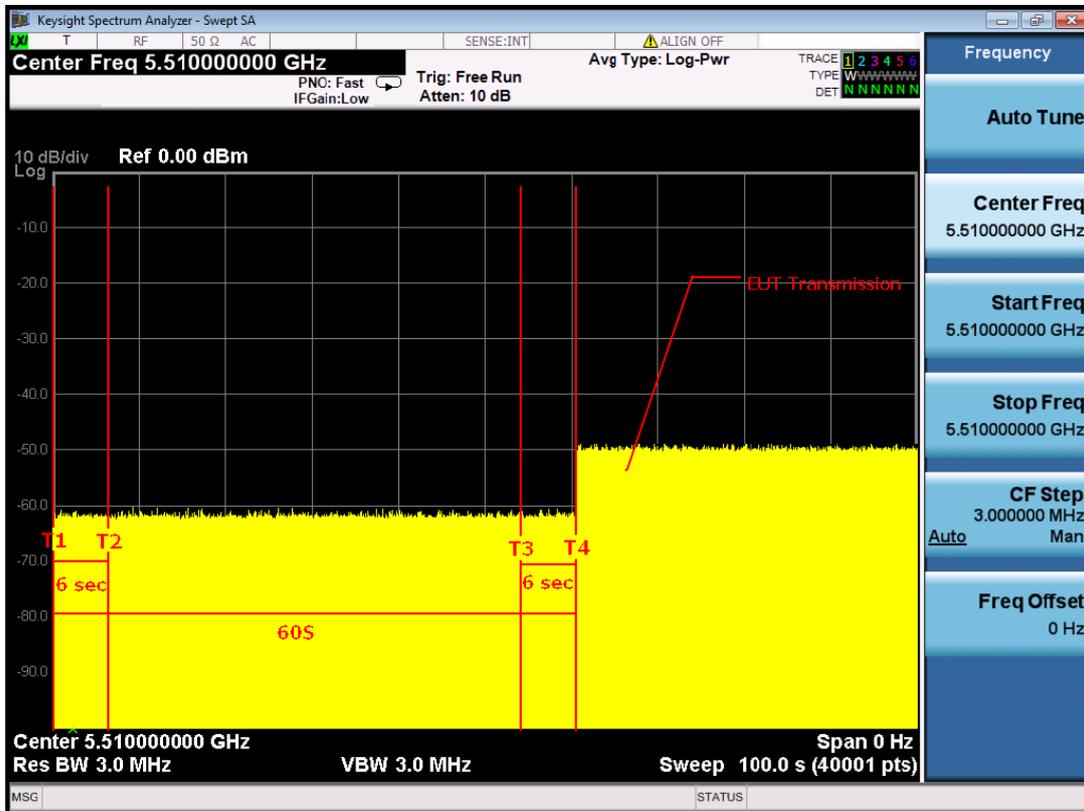

**Note:** T1 denotes the end of power-up time period is 6 second.  
T4 denotes the end of Channel Availability Check time is 66 second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.


### 11n 40MHz Mode

Radar Burst at the Beginning of the Channel Availability Check Time

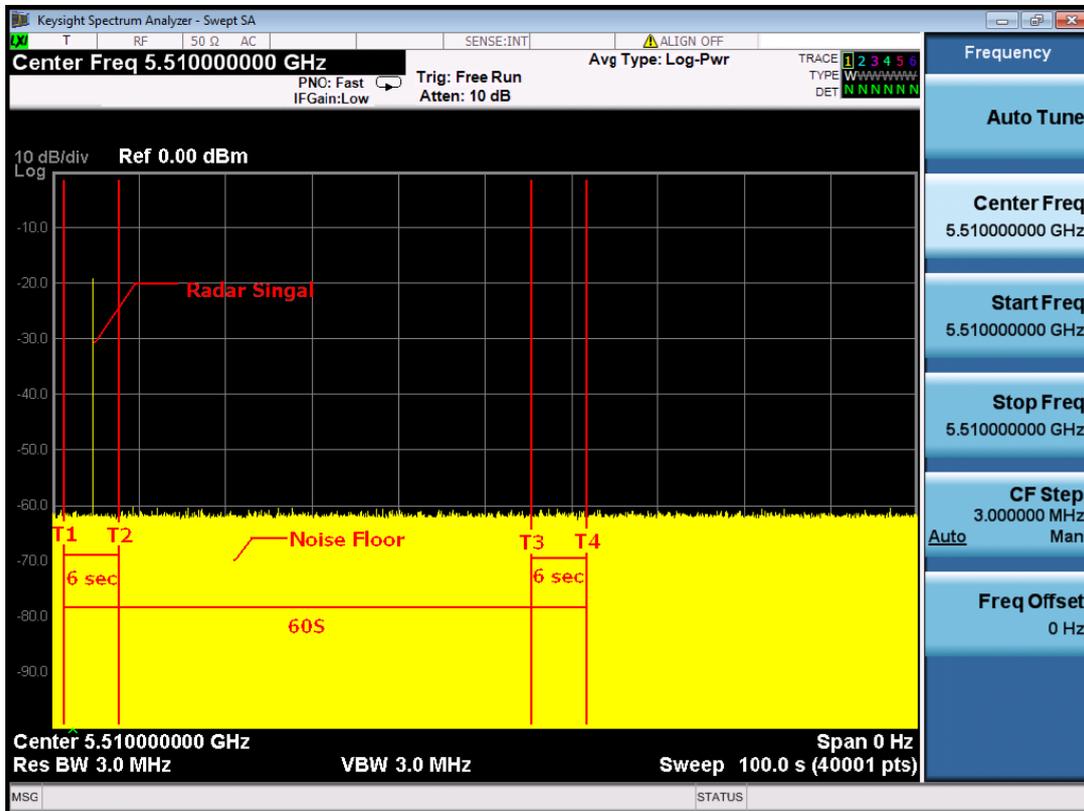

**Note:** T1 denotes the end of power up time period is 6 second.  
 T2 denotes 12 second. the radar burst was commenced within a 6 second window starting from the end of power-up sequence.  
 T4 denotes the 66 second.


**11n 40MHz Mode**  
**Radar Burst at the End of the Channel Availability Check Time**

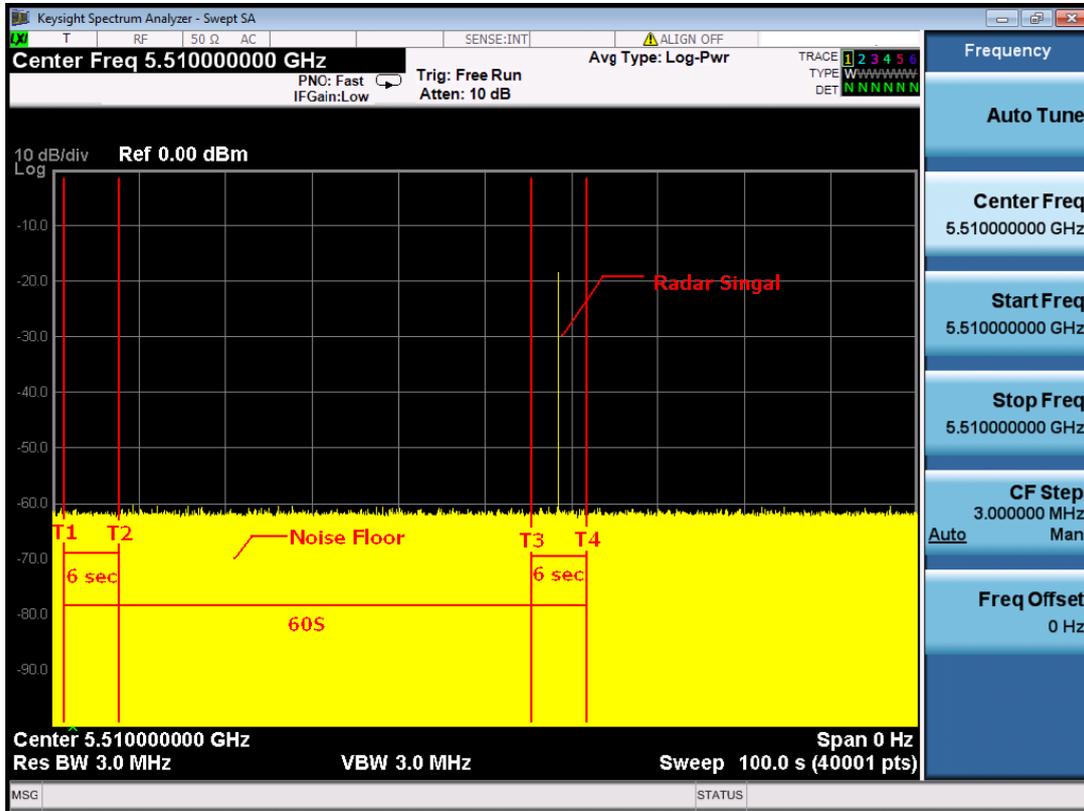

**Note:** T1 denotes the end of power up time period is 6 second.  
 T3 denotes 66 second and radar burst was commenced within 54<sup>th</sup>second to 60<sup>th</sup>second window starting from the end of power-up sequence.  
 T4 denotes the 66 second

### 11ac 80MHz Mode


#### Initial Channel Availability Check Time

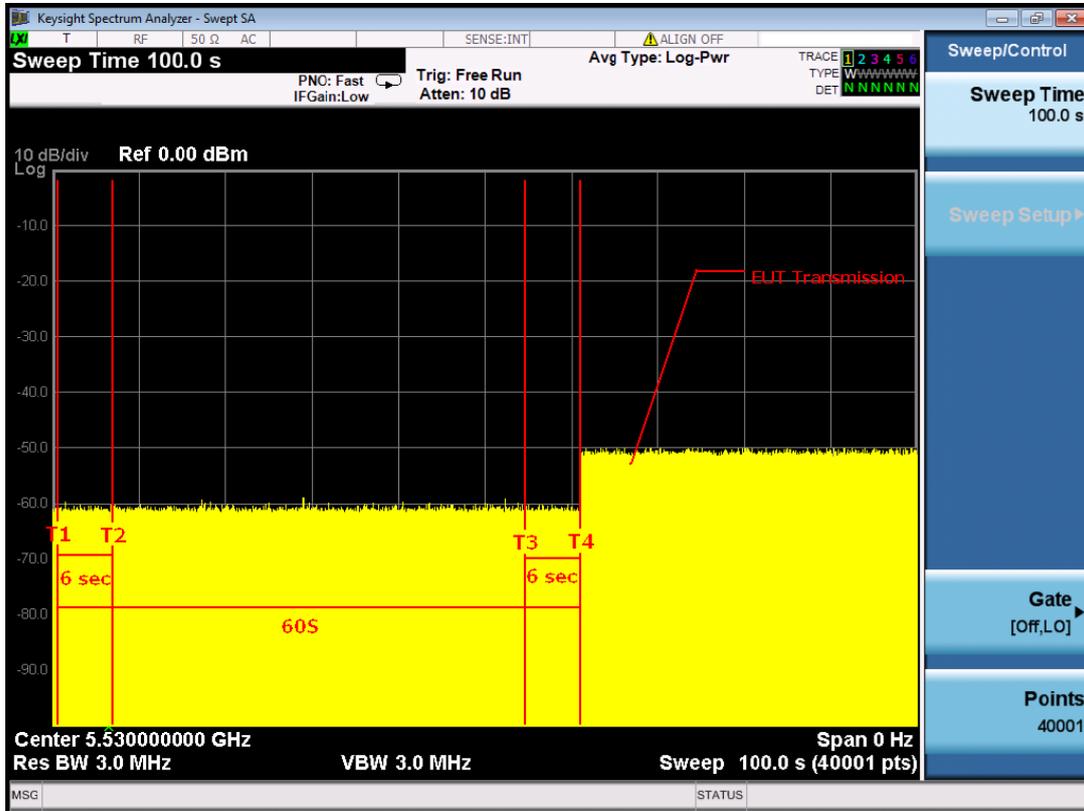

**Note:** T1 denotes the end of power-up time period is 6 second.  
T4 denotes the end of Channel Availability Check time is 66 second. Channel Availability Check time is equal to (T4 – T1) 60 seconds.


### 11ac 80MHz Mode

Radar Burst at the Beginning of the Channel Availability Check Time

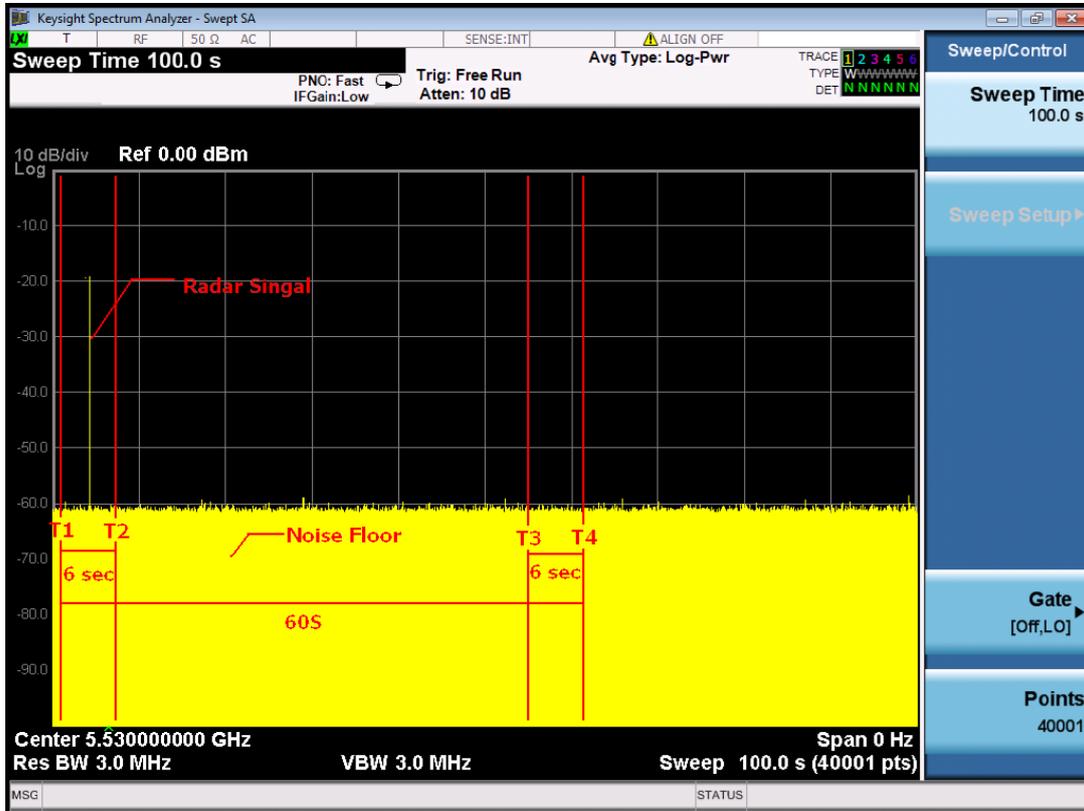

**Note:** T1 denotes the end of power up time period is 6 second.  
 T2 denotes 12 second. the radar burst was commenced within a 6 second window starting from the end of power-up sequence.  
 T4 denotes the 66 second.

**11ac 80MHz Mode**  
**Radar Burst at the End of the Channel Availability Check Time**

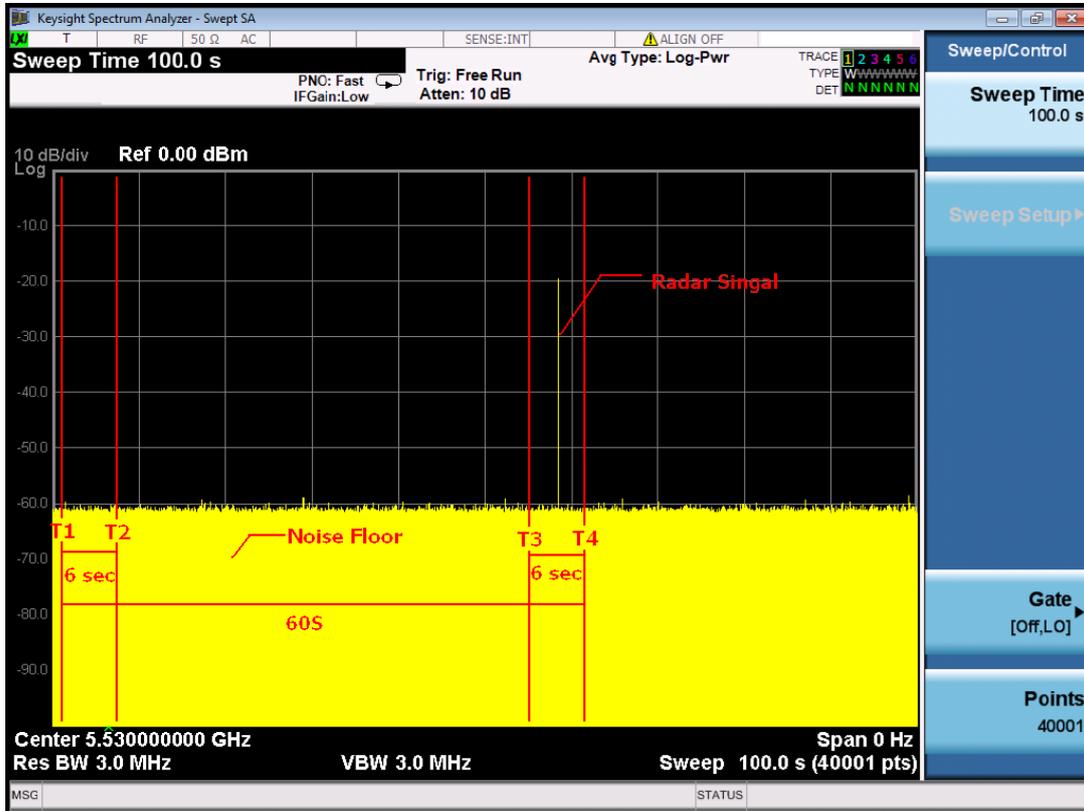

**Note:** T1 denotes the end of power up time period is 6 second.  
 T3 denotes 66 second and radar burst was commenced within 54<sup>th</sup>second to 60<sup>th</sup>second window starting from the end of power-up sequence.  
 T4 denotes the 66 second

### 6.2.4 CHANNEL CLOSING TRANSMISSION AND CHANNEL MOVE TIME WLAN TRAFFIC

TX (11a Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \begin{array}{l} \left( \frac{1}{360} \right) \\ \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	27	3	90
2	1-5	150-230	23-29	28	2	93
3	6-10	200-500	16-18	26	4	87
4	11-20	200-500	12-16	28	2	93
Aggregate (Radar Types 1-4)			-	109	11	91

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	30	0	100

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	27	3	90

Table 4: Short Pulse Radar Test Waveforms.– Bridge Mode


Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
0	1	1428	18	30	0	100

Table 5: Short Pulse Radar Test Waveforms.– Mesh Mode


Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
0	1	1428	18	30	0	100

TX (11a Mode )

Radar signal 0

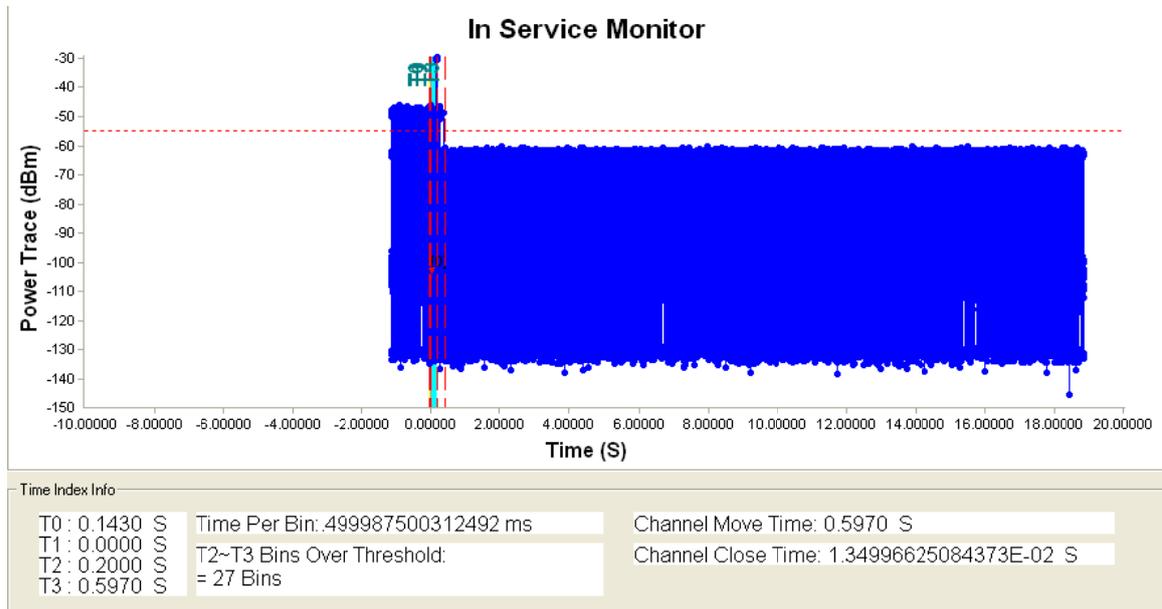

**Note:** T0 denotes the start of Channel Move Time upon the end of the last Radar burst.  
 T1 denotes the data transmission time of 200ms from T0.  
 T2 denotes the end of Channel Move Time.  
 T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

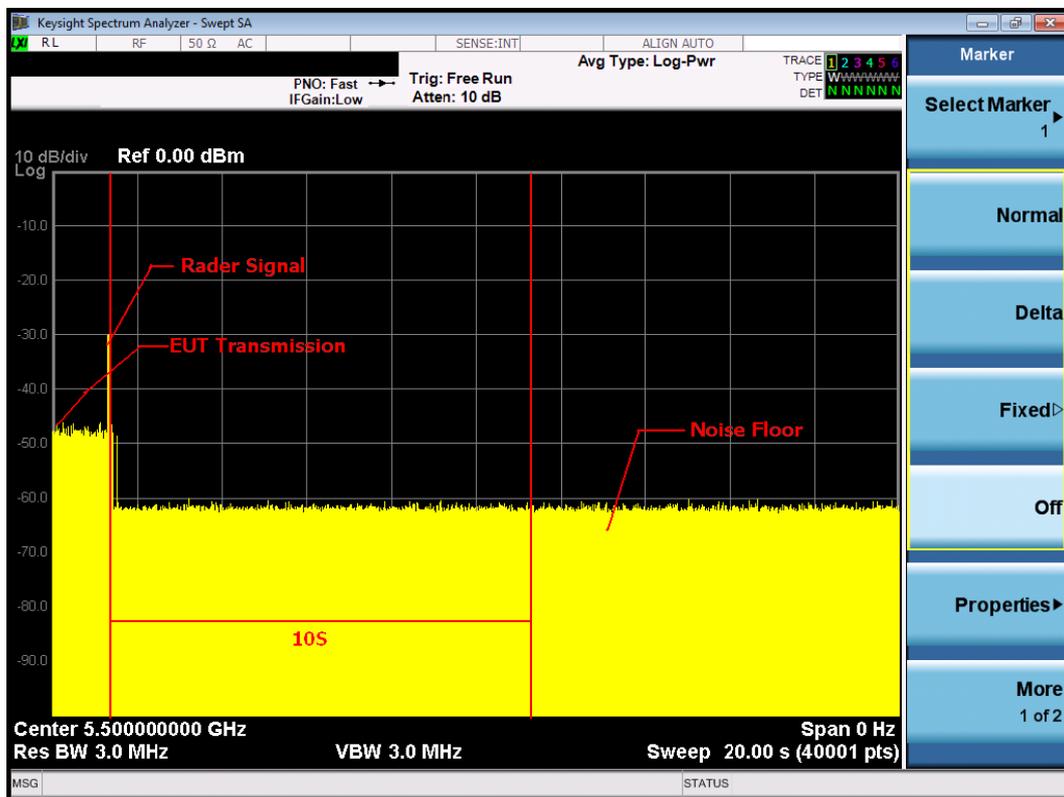

**Note:** An expanded plot for the device vacates the channel in the required 500ms

TX (11a Mode)

Radar1 Static Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	18	1.0u	1.428	YES
2	18	1.0u	1.428	YES
3	18	1.0u	1.428	YES
4	18	1.0u	1.428	YES
5	18	1.0u	1.428	NO
6	18	1.0u	1.428	YES
7	18	1.0u	1.428	YES
8	18	1.0u	1.428	YES
9	18	1.0u	1.428	YES
10	18	1.0u	1.428	YES
11	18	1.0u	1.428	YES
12	18	1.0u	1.428	NO
13	18	1.0u	1.428	YES
14	18	1.0u	1.428	YES
15	18	1.0u	1.428	YES
16	18	1.0u	1.428	YES
17	18	1.0u	1.428	YES
18	18	1.0u	1.428	YES
19	18	1.0u	1.428	YES
20	18	1.0u	1.428	YES
21	18	1.0u	1.428	YES
22	18	1.0u	1.428	YES
23	18	1.0u	1.428	YES
24	18	1.0u	1.428	YES
25	18	1.0u	1.428	NO
26	18	1.0u	1.428	YES
27	18	1.0u	1.428	YES
28	18	1.0u	1.428	YES
29	18	1.0u	1.428	YES
30	18	1.0u	1.428	YES
Detection Rate :				90 %

Radar2 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	28	4.3u	208	YES
2	28	2.8u	160	YES
3	26	2.9u	184	YES
4	24	2.7u	190	YES
5	28	3.4u	172	YES
6	28	4.0u	170	YES
7	27	1.3u	220	YES
8	28	1.4u	168	YES
9	25	4.5u	209	YES
10	24	3.3u	204	NO
11	26	2.4u	229	YES
12	27	3.8u	224	YES
13	23	2.7u	207	YES
14	24	3.3u	204	YES
15	26	2.4u	229	YES
16	27	3.8u	224	NO
17	29	2.7u	226	YES
18	29	2.9u	210	YES
19	27	1.8u	190	YES
20	26	2.0u	198	YES
21	23	1.2u	151	YES
22	25	1.4u	168	YES
23	25	1.5u	193	YES
24	27	2.6u	228	YES
25	26	1.7u	216	YES
26	23	4.8u	225	YES
27	28	1.9u	221	YES
28	26	4.1u	227	YES
29	26	3.1u	169	YES
30	27	2.2u	208	YES
Detection Rate 93%				

Radar3 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(s)	PRI(us)	Detection(YES / No)
1	18	8.6u	405	YES
2	18	8.4u	410	YES
3	16	9.3u	398	NO
4	16	8.0u	364	YES
5	17	9.6u	366	YES
6	18	8.0u	258	YES
7	16	9.3u	268	NO
8	16	8.2u	477	YES
9	18	8.7u	206	YES
10	18	9.0u	213	YES
11	16	9.8u	482	YES
12	17	7.9u	436	YES
13	17	7.0u	447	YES
14	16	7.6u	410	YES
15	16	8.2u	300	YES
16	18	7.4u	336	YES
17	16	9.3u	492	YES
18	17	7.5u	471	YES
19	17	7.9u	481	NO
20	18	8.0u	492	YES
21	16	9.9u	463	YES
22	17	8.5u	445	YES
23	17	8.0u	250	YES
24	16	8.0u	364	YES
25	17	7.2u	435	YES
26	18	6.5u	336	YES
27	18	6.8u	480	YES
28	17	7.2u	435	NO
29	18	6.5u	336	YES
30	18	6.8u	480	YES
				Detection Rate 87%

Radar4 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	13	13.8u	482	YES
2	15	14.9u	436	YES
3	15	15.8u	447	YES
4	15	14.6u	410	YES
5	14	13.9u	481	YES
6	14	16.0u	492	YES
7	15	17.0u	463	YES
8	12	17.5u	445	YES
9	12	16.0u	442	YES
10	13	13.6u	405	YES
11	16	14.4u	440	YES
12	16	15.3u	398	YES
13	13	14.0u	364	YES
14	16	13.2u	477	YES
15	12	12.7u	206	NO
16	13	12.0u	213	YES
17	15	19.0u	300	YES
18	13	11.4u	336	YES
19	16	12.5u	330	YES
20	13	16.6u	463	YES
21	13	18.8u	445	YES
22	15	19.0u	442	YES
23	15	14.8u	405	YES
24	15	18.6u	409	YES
25	15	18.2u	441	YES
26	12	20.0u	332	YES
27	14	14.8u	478	YES
28	13	15.6u	367	YES
29	14	17.0u	258	NO
30	15	19.3u	270	YES
				Detection Rate 93%

Radar5 Statical Performances		
Trial #	Test Signal name	Detection(YES / No)
1	LP_Signal_01	Yes
2	LP_Signal_02	Yes
3	LP_Signal_03	Yes
4	LP_Signal_04	Yes
5	LP_Signal_05	Yes
6	LP_Signal_06	Yes
7	LP_Signal_07	Yes
8	LP_Signal_08	Yes
9	LP_Signal_09	Yes
10	LP_Signal_10	Yes
11	LP_Signal_11	Yes
12	LP_Signal_12	Yes
13	LP_Signal_13	Yes
14	LP_Signal_14	Yes
15	LP_Signal_15	Yes
16	LP_Signal_16	Yes
17	LP_Signal_17	Yes
18	LP_Signal_18	Yes
19	LP_Signal_19	Yes
20	LP_Signal_20	Yes
21	LP_Signal_21	Yes
22	LP_Signal_22	Yes
23	LP_Signal_23	Yes
24	LP_Signal_24	Yes
25	LP_Signal_25	Yes
26	LP_Signal_26	Yes
27	LP_Signal_27	Yes
28	LP_Signal_28	Yes
29	LP_Signal_29	Yes
30	LP_Signal_30	Yes
		Detection Rate 100%

Radar6 Statical Performances		
Trial #	Hoping Frequency Sequence Name	Detection(YES / No)
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	NO
5	HOP_FREQ_SEQ_05	Yes
6	HOP_FREQ_SEQ_06	Yes
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	NO
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	NO
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	Yes
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP_FREQ_SEQ_30	Yes
		Detection Rate 90%

TX (11n 40MHz Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a <hr/> Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	$\text{Roundup} \left( \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right)$	28	2	93
2	1-5	150-230	23-29	27	3	90
3	6-10	200-500	16-18	27	3	90
4	11-20	200-500	12-16	26	4	87
Aggregate (Radar Types 1-4)			-	108	12	90

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
5	1	333	9	0.333	300	25	5	83

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	27	3	90

Table 4: Short Pulse Radar Test Waveforms.– Bridge Mode


Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
0	1	1428	18	30	0	100

Table 5: Short Pulse Radar Test Waveforms.– Mesh Mode


Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
0	1	1428	18	30	0	100

TX (11n 40MHz Mode )

Radar signal 0

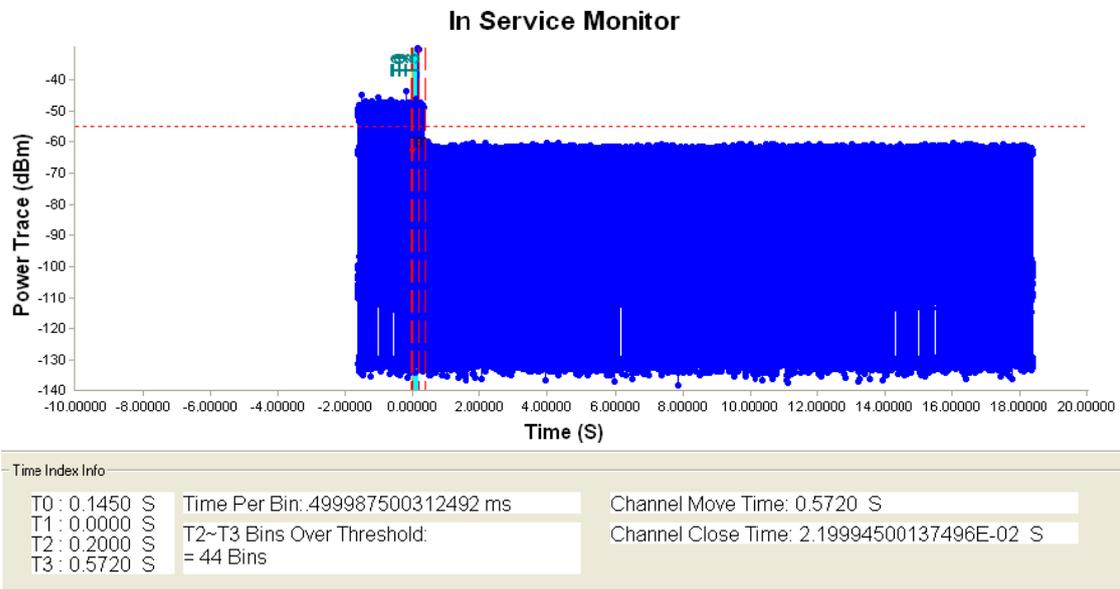

**Note:** T0 denotes the start of Channel Move Time upon the end of the last Radar burst.  
 T1 denotes the data transmission time of 200ms from T0.  
 T2 denotes the end of Channel Move Time.  
 T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

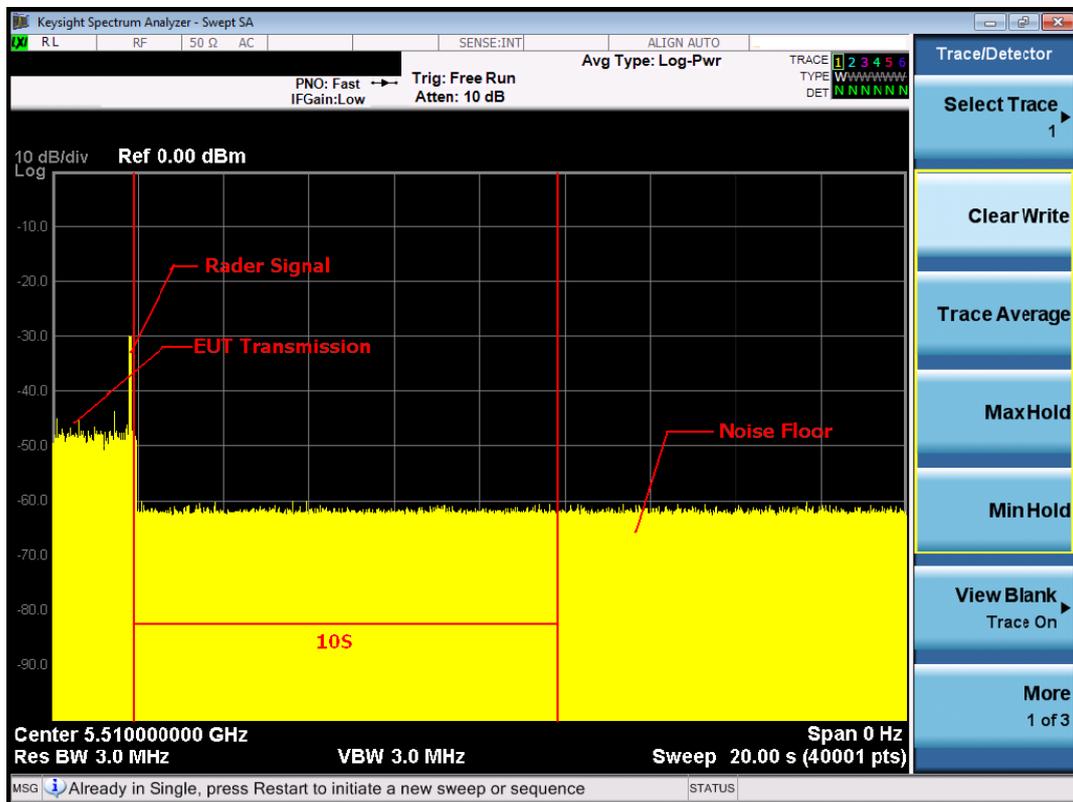

**Note:** An expanded plot for the device vacates the channel in the required 500ms

TX (11n 40MHz Mode)

Radar1 Static Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	76	1.0u	698	YES
2	86	1.0u	618	YES
3	83	1.0u	638	YES
4	57	1.0u	938	YES
5	76	1.0u	698	YES
6	68	1.0u	778	YES
7	99	1.0u	538	YES
8	99	1.0u	538	YES
9	74	1.0u	718	YES
10	102	1.0u	518	YES
11	70	1.0u	758	YES
12	76	1.0u	698	YES
13	74	1.0u	718	YES
14	89	1.0u	598	YES
15	102	1.0u	518	NO
16	22	1.0u	2457	YES
17	53	1.0u	1002	YES
18	19	1.0u	2783	YES
19	24	1.0u	2227	YES
20	19	1.0u	2848	YES
21	26	1.0u	2036	YES
22	21	1.0u	2579	YES
23	44	1.0u	1209	NO
24	66	1.0u	810	YES
25	18	1.0u	2986	YES
26	28	1.0u	1913	YES
27	69	1.0u	768	YES
28	42	1.0u	1263	YES
29	27	1.0u	1988	YES
30	19	1.0u	2853	YES
Detection Rate 93%				

Radar2 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	29	1.3	162	YES
2	28	2.5	219	YES
3	27	1.3	203	YES
4	23	2.3	172	YES
5	29	4.1	184	YES
6	25	4.5	190	YES
7	26	2.1	220	YES
8	24	1.5	204	YES
9	29	5	167	YES
10	28	1.5	174	YES
11	29	1.1	199	YES
12	25	3.8	185	NO
13	28	2.2	207	YES
14	29	3.6	229	YES
15	24	4.9	227	YES
16	23	1.6	197	YES
17	25	4.7	205	YES
18	23	2	203	YES
19	28	1.6	222	YES
20	27	1.3	194	NO
21	26	3.8	183	YES
22	29	3.7	154	YES
23	25	3.9	221	NO
24	28	3.1	175	YES
25	29	2.7	222	YES
26	23	3.7	160	YES
27	27	4.8	175	YES
28	23	2	218	YES
29	24	1.5	169	YES
30	26	1.4	192	YES
Detection Rate 90%				

Radar3 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(s)	PRI(us)	Detection(YES / No)
1	18	8.5u	445	YES
2	17	8.0u	442	YES
3	17	8.6u	414	YES
4	17	8.4u	409	YES
5	16	9.3u	398	YES
6	16	8.0u	364	YES
7	16	9.6u	386	YES
8	16	8.0u	258	YES
9	16	8.8u	445	YES
10	17	7.6u	310	YES
11	17	7.9u	481	YES
12	16	8.0u	268	YES
13	18	9.9u	463	YES
14	17	8.6u	225	YES
15	18	8.2u	477	YES
16	17	8.7u	240	YES
17	17	9.0u	213	YES
18	16	9.8u	480	YES
19	16	7.9u	436	YES
20	16	9.3u	269	YES
21	16	7.2u	431	YES
22	17	7.2u	330	YES
23	17	6.9u	452	YES
24	18	6.0u	488	YES
25	16	8.3u	388	YES
26	17	8.2u	443	YES
27	17	6.6u	408	YES
28	16	8.8u	350	YES
29	18	9.5u	480	YES
30	16	9.8u	216	NO
Detection Rate 90%				

Radar4 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	14	17.5u	405	YES
2	16	15.0u	463	YES
3	13	13.6u	330	YES
4	14	14.4u	410	YES
5	16	15.3u	398	YES
6	15	14.0u	365	YES
7	13	15.3u	367	NO
8	14	11.7u	319	YES
9	13	19.8u	274	YES
10	15	16.0u	377	YES
11	13	16.6u	463	YES
12	12	12.5u	445	YES
13	13	12.0u	445	YES
14	13	13.8u	405	YES
15	13	14.9u	409	YES
16	15	15.8u	436	YES
17	12	14.8u	447	YES
18	15	13.9u	400	YES
19	12	16.0u	481	YES
20	12	17.0u	496	YES
21	12	15.8u	463	YES
22	13	14.6u	445	YES
23	16	17.0u	442	NO
24	12	14.0u	485	YES
25	13	14.0u	260	YES
26	16	15.6u	280	YES
27	15	17.0u	450	YES
28	13	19.3u	330	YES
29	13	18.5u	470	YES
30	13	20.0u	335	YES
Detection Rate 93%				

Radar5 Statical Performances		
Trial #	Test Signal name	Detection(YES / No)
1	LP_Signal_01	YES
2	LP_Signal_02	YES
3	LP_Signal_03	YES
4	LP_Signal_04	YES
5	LP_Signal_05	YES
6	LP_Signal_06	YES
7	LP_Signal_07	YES
8	LP_Signal_08	YES
9	LP_Signal_09	YES
10	LP_Signal_10	NO
11	LP_Signal_11	YES
12	LP_Signal_12	YES
13	LP_Signal_13	YES
14	LP_Signal_14	YES
15	LP_Signal_15	YES
16	LP_Signal_16	YES
17	LP_Signal_17	YES
18	LP_Signal_18	YES
19	LP_Signal_19	YES
20	LP_Signal_20	YES
21	LP_Signal_21	YES
22	LP_Signal_22	YES
23	LP_Signal_23	NO
24	LP_Signal_24	YES
25	LP_Signal_25	YES
26	LP_Signal_26	YES
27	LP_Signal_27	YES
28	LP_Signal_28	YES
29	LP_Signal_29	YES
30	LP_Signal_30	YES
Detection Rate93%		

Radar6 Statical Performances		
Trial #	Hoping Frequency Sequence Name	Detection(YES / No)
1	HOP_FREQ_SEQ_01	YES
2	HOP_FREQ_SEQ_02	YES
3	HOP_FREQ_SEQ_03	YES
4	HOP_FREQ_SEQ_04	YES
5	HOP_FREQ_SEQ_05	NO
6	HOP_FREQ_SEQ_06	YES
7	HOP_FREQ_SEQ_07	YES
8	HOP_FREQ_SEQ_08	YES
9	HOP_FREQ_SEQ_09	YES
10	HOP_FREQ_SEQ_10	YES
11	HOP_FREQ_SEQ_11	YES
12	HOP_FREQ_SEQ_12	YES
13	HOP_FREQ_SEQ_13	YES
14	HOP_FREQ_SEQ_14	YES
15	HOP_FREQ_SEQ_15	NO
16	HOP_FREQ_SEQ_16	YES
17	HOP_FREQ_SEQ_17	YES
18	HOP_FREQ_SEQ_18	YES
19	HOP_FREQ_SEQ_19	YES
20	HOP_FREQ_SEQ_20	YES
21	HOP_FREQ_SEQ_21	YES
22	HOP_FREQ_SEQ_22	YES
23	HOP_FREQ_SEQ_23	YES
24	HOP_FREQ_SEQ_24	YES
25	HOP_FREQ_SEQ_25	YES
26	HOP_FREQ_SEQ_26	YES
27	HOP_FREQ_SEQ_27	YES
28	HOP_FREQ_SEQ_28	YES
29	HOP_FREQ_SEQ_29	YES
30	HOP_FREQ_SEQ_30	YES
Detection Rate 93%		

TX (11ac 80MHz Mode)

Table 1: Short Pulse Radar Test Waveforms.

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a <hr/> Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A	$\text{Roundup} \left( \frac{1}{360} \cdot \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right)$	27	3	90
2	1-5	150-230	23-29	26	4	87
3	6-10	200-500	16-18	26	4	87
4	11-20	200-500	12-16	27	3	90
Aggregate (Radar Types 1-4)			-	106	14	88

Table 2: Long Pulse Radar Test Waveform

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses Per Burst	Number of Bursts	Pass times	Fail times	Percentage of Successful Detection (%)
5	50-100	5-20	1000-2000	1-3	8-20	26	4	87

Table 3: Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Pass times	Fail times	Percentage of Successful Detection (%)
6	1	333	9	0.333	300	26	4	87


Table 4: Short Pulse Radar Test Waveforms.– Bridge Mode

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
0	1	1428	18	29	1	97


Table 5: Short Pulse Radar Test Waveforms.– Mesh Mode

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Pass times	Fail times	Percentage of Successful Detection (%)
0	1	1428	18	29	1	97

TX (11ac 80MHz Mode )  
 Radar signal 0

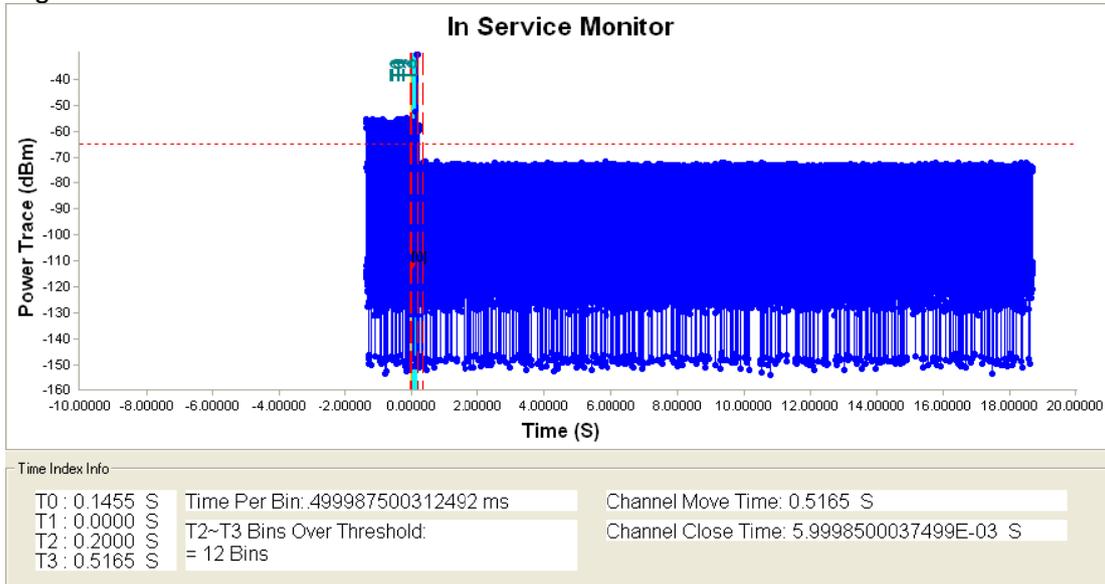

**Note:** T0 denotes the start of Channel Move Time upon the end of the last Radar burst.  
 T1 denotes the data transmission time of 200ms from T0.  
 T2 denotes the end of Channel Move Time.  
 T3 denotes the 10 second from T0 to observe the aggregate duration of transmissions.

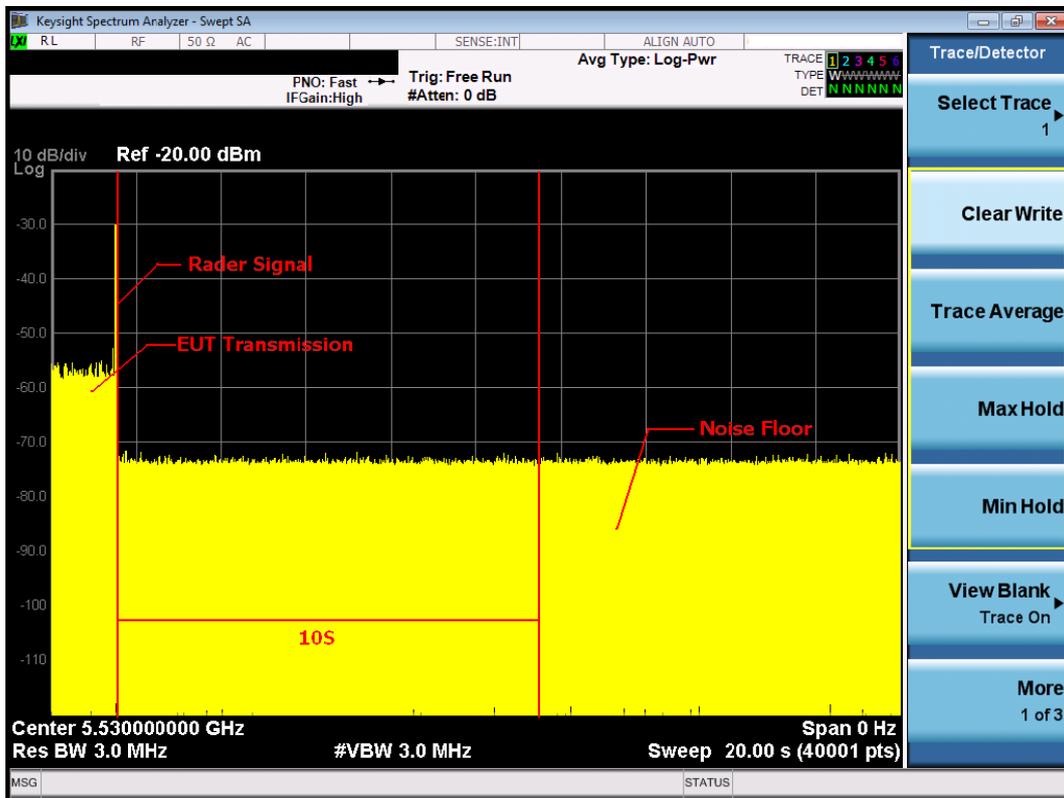

**Note:** An expanded plot for the device vacates the channel in the required 500ms

TX (11n 40MHz Mode)

Radar1 Static Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	18	1.0u	1.428	YES
2	18	1.0u	1.428	YES
3	18	1.0u	1.428	YES
4	18	1.0u	1.428	YES
5	18	1.0u	1.428	NO
6	18	1.0u	1.428	YES
7	18	1.0u	1.428	YES
8	18	1.0u	1.428	YES
9	18	1.0u	1.428	YES
10	18	1.0u	1.428	YES
11	18	1.0u	1.428	YES
12	18	1.0u	1.428	NO
13	18	1.0u	1.428	YES
14	18	1.0u	1.428	YES
15	18	1.0u	1.428	YES
16	18	1.0u	1.428	YES
17	18	1.0u	1.428	YES
18	18	1.0u	1.428	YES
19	18	1.0u	1.428	YES
20	18	1.0u	1.428	YES
21	18	1.0u	1.428	YES
22	18	1.0u	1.428	YES
23	18	1.0u	1.428	YES
24	18	1.0u	1.428	YES
25	18	1.0u	1.428	NO
26	18	1.0u	1.428	YES
27	18	1.0u	1.428	YES
28	18	1.0u	1.428	YES
29	18	1.0u	1.428	YES
30	18	1.0u	1.428	YES
Detection Rate 90%				

Radar2 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	28	4.3u	208	YES
2	28	2.8u	160	YES
3	26	2.9u	184	YES
4	24	2.7u	190	YES
5	28	3.4u	172	YES
6	28	4.0u	170	YES
7	27	1.3u	220	YES
8	28	1.4u	168	YES
9	25	4.5u	209	YES
10	24	3.3u	204	NO
11	26	2.4u	229	YES
12	27	3.8u	224	YES
13	23	2.7u	207	YES
14	24	3.3u	204	YES
15	26	2.4u	229	YES
16	27	3.8u	224	NO
17	29	2.7u	226	YES
18	29	2.9u	210	YES
19	27	1.8u	190	YES
20	26	2.0u	198	YES
21	23	1.2u	151	YES
22	25	1.4u	168	YES
23	25	1.5u	193	YES
24	27	2.6u	228	YES
25	26	1.7u	216	YES
26	23	4.8u	225	YES
27	28	1.9u	221	YES
28	26	4.1u	227	YES
29	26	3.1u	169	YES
30	27	2.2u	208	YES
Detection Rate 93%				

Radar3 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(s)	PRI(us)	Detection(YES / No)
1	18	8.6u	405	YES
2	18	8.4u	410	YES
3	16	9.3u	398	NO
4	16	8.0u	364	YES
5	17	9.6u	366	YES
6	18	8.0u	258	YES
7	16	9.3u	268	NO
8	16	8.2u	477	YES
9	18	8.7u	206	YES
10	18	9.0u	213	YES
11	16	9.8u	482	YES
12	17	7.9u	436	YES
13	17	7.0u	447	YES
14	16	7.6u	410	YES
15	16	8.2u	300	YES
16	18	7.4u	336	YES
17	16	9.3u	492	YES
18	17	7.5u	471	YES
19	17	7.9u	481	NO
20	18	8.0u	492	YES
21	16	9.9u	463	YES
22	17	8.5u	445	YES
23	17	8.0u	250	YES
24	16	8.0u	364	YES
25	17	7.2u	435	YES
26	18	6.5u	336	YES
27	18	6.8u	480	YES
28	17	7.2u	435	NO
29	18	6.5u	336	YES
30	18	6.8u	480	YES
Detection Rate 87%				

Radar4 Statical Performances				
Trial #	Pluse per Burst	Pluse Width(us)	PRI(us)	Detection(YES / No)
1	13	13.8u	482	YES
2	15	14.9u	436	YES
3	15	15.8u	447	YES
4	15	14.6u	410	YES
5	14	13.9u	481	YES
6	14	16.0u	492	YES
7	15	17.0u	463	YES
8	12	17.5u	445	YES
9	12	16.0u	442	YES
10	13	13.6u	405	YES
11	16	14.4u	440	YES
12	16	15.3u	398	YES
13	13	14.0u	364	YES
14	16	13.2u	477	YES
15	12	12.7u	206	NO
16	13	12.0u	213	YES
17	15	19.0u	300	YES
18	13	11.4u	336	YES
19	16	12.5u	330	YES
20	13	16.6u	463	YES
21	13	18.8u	445	YES
22	15	19.0u	442	YES
23	15	14.8u	405	YES
24	15	18.6u	409	YES
25	15	18.2u	441	YES
26	12	20.0u	332	YES
27	14	14.8u	478	YES
28	13	15.6u	367	YES
29	14	17.0u	258	NO
30	15	19.3u	270	YES
Detection Rate 93%				

Radar5 Statical Performances		
Trial #	Test Signal name	Detection(YES / No)
1	LP_Signal_01	Yes
2	LP_Signal_02	Yes
3	LP_Signal_03	Yes
4	LP_Signal_04	Yes
5	LP_Signal_05	Yes
6	LP_Signal_06	Yes
7	LP_Signal_07	Yes
8	LP_Signal_08	Yes
9	LP_Signal_09	Yes
10	LP_Signal_10	Yes
11	LP_Signal_11	Yes
12	LP_Signal_12	Yes
13	LP_Signal_13	Yes
14	LP_Signal_14	Yes
15	LP_Signal_15	Yes
16	LP_Signal_16	Yes
17	LP_Signal_17	Yes
18	LP_Signal_18	Yes
19	LP_Signal_19	Yes
20	LP_Signal_20	Yes
21	LP_Signal_21	Yes
22	LP_Signal_22	Yes
23	LP_Signal_23	Yes
24	LP_Signal_24	Yes
25	LP_Signal_25	Yes
26	LP_Signal_26	Yes
27	LP_Signal_27	Yes
28	LP_Signal_28	Yes
29	LP_Signal_29	Yes
30	LP_Signal_30	Yes
Detection Rate100%		

Radar6 Statical Performances		
Trial #	Hoping Frequency Sequence Name	Detection(YES / No)
1	HOP_FREQ_SEQ_01	Yes
2	HOP_FREQ_SEQ_02	Yes
3	HOP_FREQ_SEQ_03	Yes
4	HOP_FREQ_SEQ_04	NO
5	HOP_FREQ_SEQ_05	Yes
6	HOP_FREQ_SEQ_06	Yes
7	HOP_FREQ_SEQ_07	Yes
8	HOP_FREQ_SEQ_08	Yes
9	HOP_FREQ_SEQ_09	Yes
10	HOP_FREQ_SEQ_10	Yes
11	HOP_FREQ_SEQ_11	Yes
12	HOP_FREQ_SEQ_12	NO
13	HOP_FREQ_SEQ_13	Yes
14	HOP_FREQ_SEQ_14	Yes
15	HOP_FREQ_SEQ_15	NO
16	HOP_FREQ_SEQ_16	Yes
17	HOP_FREQ_SEQ_17	Yes
18	HOP_FREQ_SEQ_18	Yes
19	HOP_FREQ_SEQ_19	Yes
20	HOP_FREQ_SEQ_20	Yes
21	HOP_FREQ_SEQ_21	Yes
22	HOP_FREQ_SEQ_22	Yes
23	HOP_FREQ_SEQ_23	Yes
24	HOP_FREQ_SEQ_24	Yes
25	HOP_FREQ_SEQ_25	Yes
26	HOP_FREQ_SEQ_26	Yes
27	HOP_FREQ_SEQ_27	Yes
28	HOP_FREQ_SEQ_28	Yes
29	HOP_FREQ_SEQ_29	Yes
30	HOP_FREQ_SEQ_30	Yes
Detection Rate 90%		


### 6.2.5NON- OCCUPANCY PERIOD

During the 30 minutes observation time, UUT did not make any transmissions on a channel after a radar signal was detected on that channel by either the Channel Availability Check or the In-Service Monitoring.


5500 Non-Occupancy period



### 5510 Non-Occupancy period

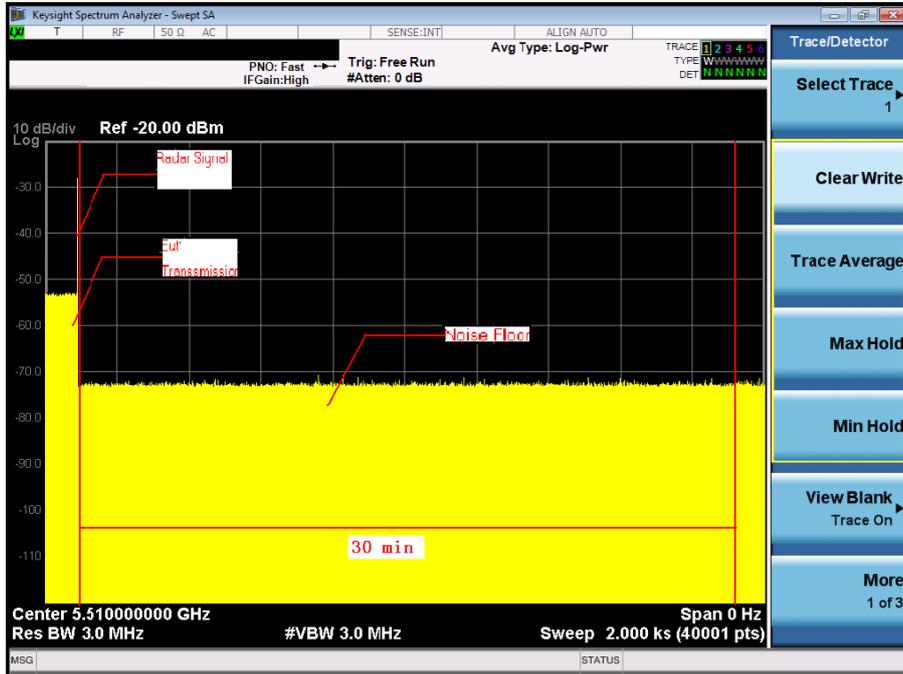


### 5530 Non-Occupancy period


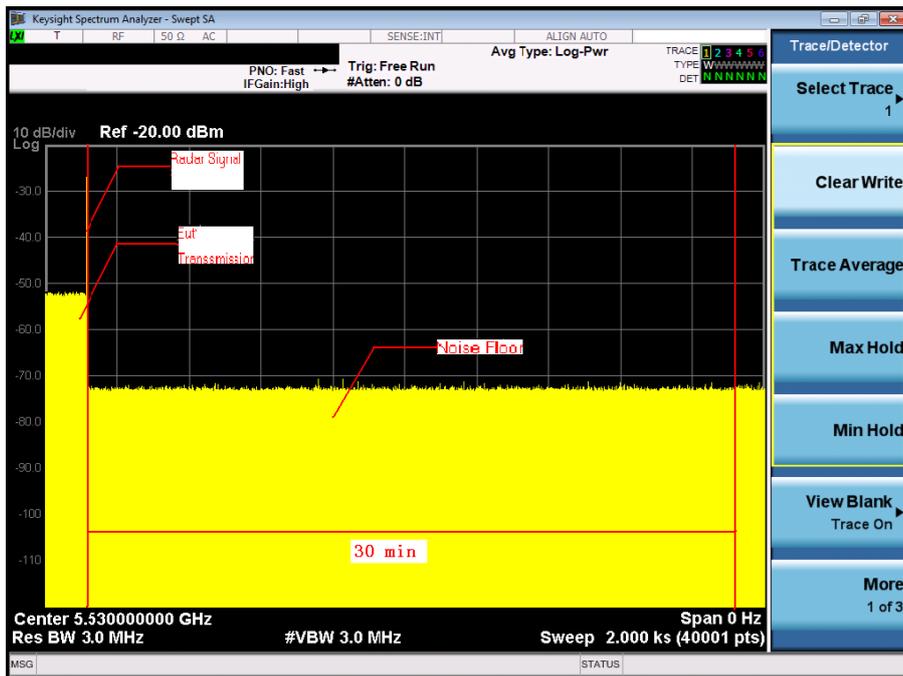


### 6.2.6 UNIFORM SPREADING

The intention of the uniform spreading is to provide, on aggregate, a uniform loading of the spectrum. The UUT using the bands 5250 to 5350MHz and 5470 to 5600 MHz channels so that the probability of selecting a given channel shall be the same for channels. The UUT will select channel by random mode and remember this channel when detect radar signal, so that will select unused channel by random mode.

### 6.2.7 U-NII DETECTION BANDWIDTH

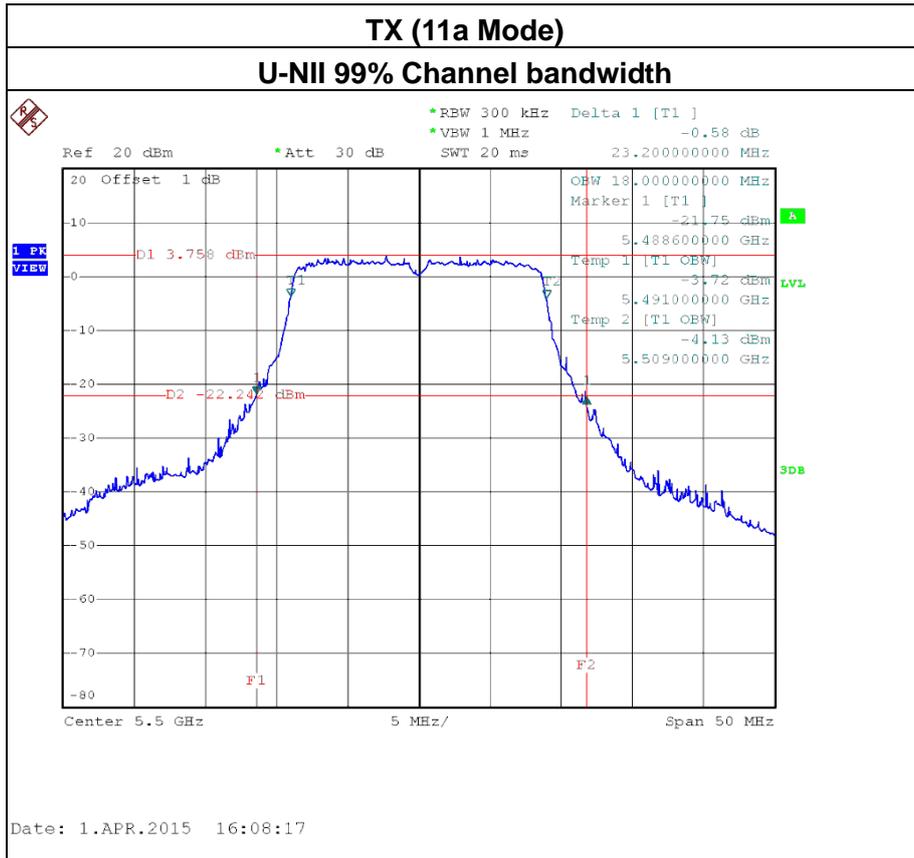

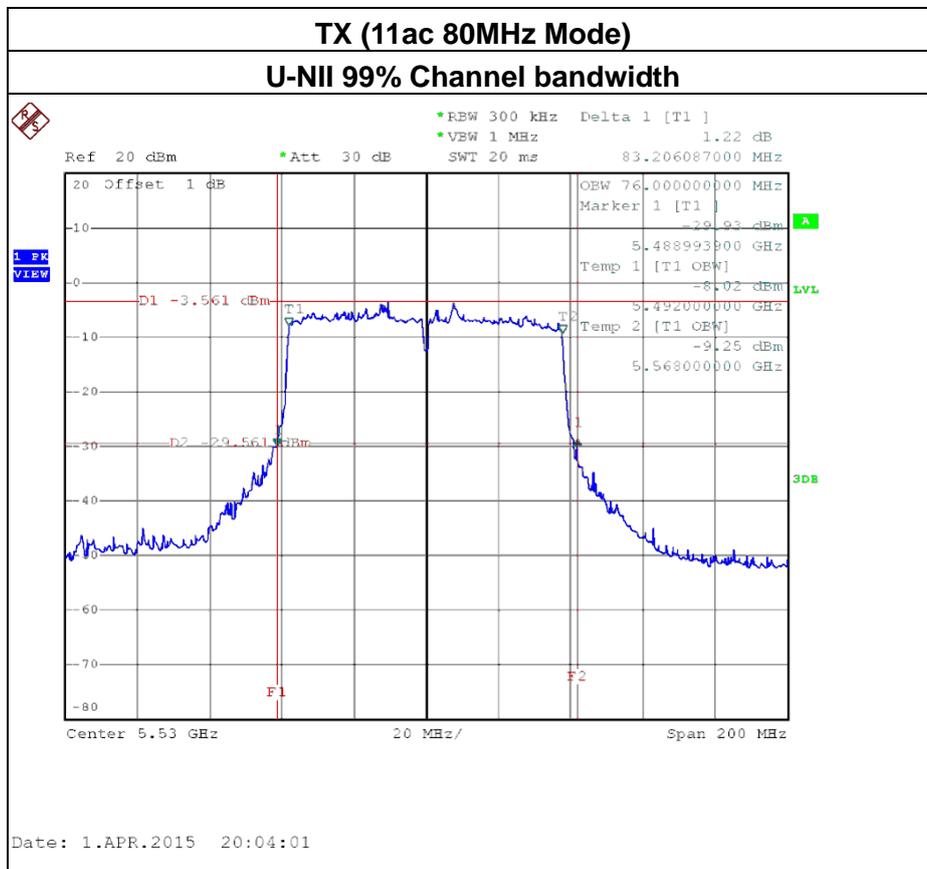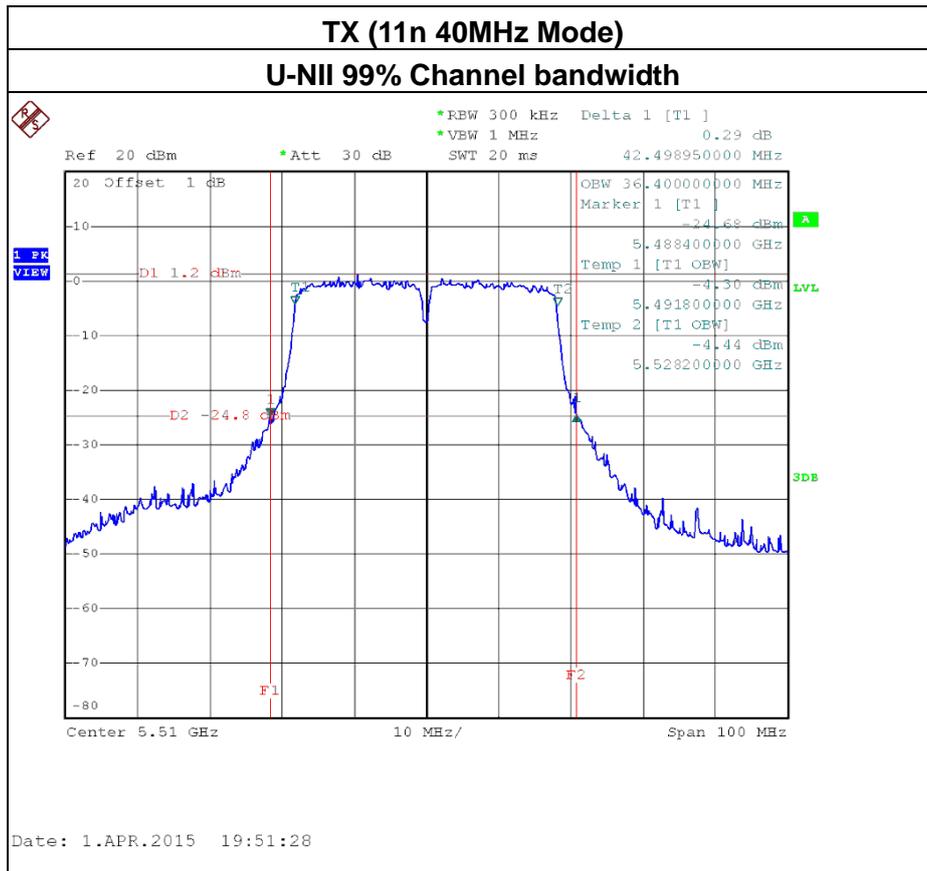

11a Mode

Detection Bandwith test tranmission 20M											
EUT FREQUENCY	5500M										
EUT power bandwith	18MHz										
Detection Bandwith limit(80%of EUT 99% Pow	15.86										
Detection Bandwith(5549(FH)-5531(FL)	20										
Test Result	PASS										
Radar Freq (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	1	0	0	1	1	0	0	0	1	1	50
5490	1	1	0	0	0	1	0	1	1	1	60
5491(FL)	1	1	1	1	1	1	1	1	1	1	100
5492	1	1	1	1	1	1	1	1	1	1	100
5493	1	1	1	1	1	1	1	1	1	1	100
5494	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5496	1	1	1	1	1	1	1	1	1	1	100
5497	1	1	1	1	1	1	1	1	1	1	100
5498	1	1	1	1	1	1	1	1	1	1	100
5499	1	1	1	1	1	1	1	1	1	1	100
5500	1	1	1	1	1	1	1	1	1	1	100
5501	1	1	1	1	1	1	1	1	1	1	100
5502	1	1	1	1	1	1	1	1	1	1	100
5503	1	1	1	1	1	1	1	1	1	1	100
5504	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5506	1	1	1	1	1	1	1	1	1	1	100
5507	1	1	1	1	1	1	1	1	1	1	100
5508	1	1	1	1	1	1	1	1	1	1	100
5509(FH)	1	1	1	1	1	1	1	1	1	1	100
5510	0	1	0	0	0	1	0	0	1	1	50
5511	1	0	1	0	0	0	1	0	1	1	50

11n 40MHz Mode

Detection Bandwidth test transmission		40M										
EUT FREQUENCY		5510M										
EUT power bandwidth		36.4MHz										
Detection Bandwidth limit (80%of EUT 99% Power bandwidth)		31.04										
Detection Bandwidth(5569(FH)-5531(FL))		40										
Test Result		PASS										
		DFS Detection Trials (1=Detection, 0= No Detection)										
Radar Freq (MHz)		1	2	3	4	5	6	7	8	9	10	Detection Rate (%)
5489		1	0	1	1	0	1	1	0	1	1	60
5490		1	1	1	0	1	0	1	0	1	0	60
5491(FL)		1	1	1	1	1	1	1	1	1	1	100
5492		1	1	1	1	1	1	1	1	1	1	100
5493		1	1	1	1	1	1	1	1	1	1	100
5494		1	1	1	1	1	1	1	1	1	1	100
5495		1	1	1	1	1	1	1	1	1	1	100
5496		1	1	1	1	1	1	1	1	1	1	100
5497		1	1	1	1	1	1	1	1	1	1	100
5498		1	1	1	1	1	1	1	1	1	1	100
5499		1	1	1	1	1	1	1	1	0	1	90
5500		1	1	1	1	1	1	1	1	1	1	100
5501		1	1	1	1	1	1	1	1	1	1	100
5502		1	1	1	1	1	1	1	1	1	1	100
5503		1	1	1	1	1	1	0	1	1	1	90
5504		1	1	1	1	1	1	1	1	1	1	100
5505		1	1	1	1	1	1	1	1	1	1	100
5506		1	1	1	1	1	1	1	1	1	1	100
5507		1	1	1	1	1	1	1	1	1	1	100
5508		1	1	1	1	1	1	1	0	1	1	90
5509		1	1	1	1	1	1	1	1	1	1	100
5510		1	1	1	1	1	1	1	1	1	1	100
5511		1	1	1	1	1	1	1	1	1	1	100
5512		1	1	1	1	1	1	1	1	1	1	100
5513		1	1	1	1	1	1	1	1	1	1	100
5514		1	1	1	1	1	1	1	1	1	1	100
5515		1	1	1	1	1	1	1	1	1	1	100
5516		1	1	1	1	1	1	1	1	1	1	100
5517		1	1	1	1	1	1	0	1	1	1	90
5518		1	1	1	1	1	1	1	1	1	1	100
5519		1	1	1	1	1	1	1	1	1	1	100
5520		1	1	1	1	1	1	1	0	1	1	90
5521		1	1	1	1	1	1	1	1	1	1	100
5522		1	1	1	1	1	1	1	1	1	1	100
5523		1	1	1	1	1	1	1	0	1	1	90
5524		1	1	1	1	1	1	1	1	1	1	100
5525		1	1	1	1	1	1	1	1	1	1	100
5526		1	1	1	1	1	1	1	1	1	1	100
5527		1	1	1	1	1	1	1	1	1	1	100
5528		1	1	1	1	1	1	1	1	1	1	100
5529(FL)		1	1	1	1	1	1	1	1	1	1	100
5300		1	0	1	1	0	1	0	0	1	1	60
5301		1	0	0	1	0	1	1	0	0	1	40

11ac 80MHz Mode

Detection Bandwidth test transmission 80M											
EUT FREQUENCY		5530M									
EUT power bandwidth		76MHz									
Detection Bandwidth limit (80% of EUT 99% Power bandwidth)		61.98									
Detection Bandwidth(5570(FH)-5549(FL))		80									
Test Result		PASS									
Radar Freq (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5489	1	0	0	0	1	0	1	0	0	0	30
5490(FL)	1	1	1	1	1	1	1	1	1	1	100
5491	1	1	1	1	1	1	1	1	1	1	100
5492	1	1	1	1	1	1	1	1	1	1	100
5493	1	1	1	1	1	1	1	1	1	1	100
5494	1	1	1	1	1	1	1	1	1	1	100
5495	1	1	1	1	1	1	1	1	1	1	100
5496	1	1	1	1	1	1	1	1	1	1	100
5497	1	1	1	1	1	1	1	1	1	1	100
5498	1	1	1	1	1	1	1	1	1	1	100
5499	1	1	1	1	1	1	0	1	1	1	90
5500	1	1	1	1	1	1	1	1	1	1	100
5501	1	1	1	1	1	1	1	1	1	1	100
5502	1	1	1	1	1	1	1	1	1	1	100
5503	1	1	1	1	1	1	1	1	1	1	100
5504	1	1	1	1	1	1	1	1	1	1	100
5505	1	1	1	1	1	1	1	1	1	1	100
5506	1	1	1	1	1	1	1	1	1	1	100
5507	1	1	1	1	1	1	1	1	1	1	100
5508	1	1	1	1	1	1	1	1	1	1	100
5509	1	1	1	1	1	1	1	1	1	1	100
5510	1	1	1	1	1	1	1	0	1	1	90
5511	1	1	1	1	1	1	1	1	1	1	100
5512	1	1	1	1	1	1	1	1	1	1	100
5513	1	1	1	1	1	1	1	1	1	1	100
5514	1	1	1	1	1	1	1	1	1	1	100
5515	1	1	1	1	1	1	0	1	1	1	90
5516	1	1	1	1	1	1	1	1	1	1	100
5517	1	1	1	1	1	1	1	1	1	1	100
5518	1	1	1	1	1	1	1	0	1	1	90
5519	1	1	1	1	1	1	1	1	1	1	100
5520	1	1	1	1	1	1	1	1	1	1	100
5521	1	1	1	1	1	1	1	1	1	1	100
5522	1	1	1	1	1	1	0	1	1	1	90
5523	1	1	1	1	1	1	1	1	1	1	100
5524	1	1	1	1	1	1	1	1	1	1	100
5525	1	1	1	1	1	1	1	1	1	1	100
5526	1	1	1	1	1	1	1	1	1	1	100
5527	1	1	1	1	1	1	1	1	1	1	100
5528	1	1	1	1	1	1	1	1	1	1	100
5529	1	1	1	1	1	1	1	1	1	1	100
5530	1	1	1	1	1	1	1	0	1	1	90
5531	1	1	1	1	1	1	1	1	1	1	100
5532	1	1	1	1	1	1	1	1	1	1	100
5533	1	1	1	1	1	1	1	1	1	1	100
5534	1	1	1	1	1	1	1	1	1	1	100
5535	1	1	1	1	1	1	1	1	1	1	100
5536	1	1	1	1	1	1	1	1	1	1	100
5537	1	1	1	1	1	1	1	1	1	1	100
5538	1	1	1	1	1	1	1	1	1	1	100

5539	1	1	1	1	1	1	1	1	1	1	100
5540	1	1	1	1	1	1	1	1	1	1	100
5541	1	1	1	1	1	1	1	1	1	1	100
5542	1	1	1	1	1	1	1	1	1	1	100
5543	1	1	1	1	1	1	1	1	1	1	100
5544	1	1	1	1	1	1	1	1	1	1	100
5545	1	1	1	1	1	1	1	1	1	1	100
5546	1	1	1	1	1	1	1	1	1	1	100
5547	1	1	1	1	1	1	1	1	1	1	100
5548	1	1	1	1	1	1	1	1	1	1	100
5549	1	1	1	1	1	1	1	1	1	1	100
5550	1	1	1	1	1	1	1	1	1	1	100
5551	1	1	1	1	1	1	1	1	1	1	100
5552	1	1	1	1	1	1	1	1	0	1	90
5553	1	1	1	1	1	1	1	1	1	1	100
5554	1	1	1	1	1	1	1	1	1	1	100
5555	1	1	1	1	1	1	1	1	1	1	100
5556	1	1	1	1	1	1	1	1	1	1	100
5557	1	1	1	1	1	1	1	1	1	1	100
5558	1	1	1	1	1	1	1	1	1	1	100
5559	1	1	1	1	1	1	1	1	1	1	100
5560	1	1	1	1	1	1	1	0	1	1	90
5561	1	1	1	1	1	1	1	1	1	1	100
5562	1	1	1	1	1	1	1	1	1	1	100
5563	1	1	1	1	1	1	1	1	1	1	100
5564	1	1	1	1	1	1	1	1	1	1	100
5565	1	1	1	1	1	1	0	1	1	1	90
5566	1	1	1	1	1	1	1	1	1	1	100
5567	1	1	1	0	1	1	1	1	1	1	90
5568	1	1	1	1	1	1	1	1	1	1	100
5569	1	1	1	1	1	1	1	1	1	1	100
5570(FL)	1	1	1	1	1	1	1	1	1	1	100
5571	0	1	0	0	0	0	1	0	0	0	20