

FCC Radio Test Report

FCC ID:QISAP8130DN

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1407C034B
Equipment : Outdoor Wireless LAN Access Point
Model Name : AP8130DN
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian,
Longgang District ,Shenzhen 518129, P.R.China


Date of Receipt : Mar. 09, 2015
Date of Test : Mar. 09, 2015 ~ Jun. 08, 2015
Issued Date : Jun. 10, 2015
Tested by : BTL Inc.

Testing Engineer :



(David Mao)

Technical Manager :

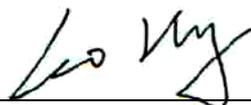

(Leo Hung)

Authorized Signatory :



(Steven Lu)

B T L I N C .

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	14
3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	16
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	22
3.5 DESCRIPTION OF SUPPORT UNITS	22
4 . EMC EMISSION TEST	23
4.1 CONDUCTED EMISSION MEASUREMENT	23
4.1.1 POWER LINE CONDUCTED EMISSION	23
4.1.2 TEST PROCEDURE	23
4.1.3 DEVIATION FROM TEST STANDARD	23
4.1.4 TEST SETUP	24
4.1.5 EUT OPERATING CONDITIONS	24
4.1.6 EUT TEST CONDITIONS	24
4.1.7 TEST RESULTS	24
4.2 RADIATED EMISSION MEASUREMENT	25
4.2.1 RADIATED EMISSION LIMITS	25
4.2.2 TEST PROCEDURE	26
4.2.3 DEVIATION FROM TEST STANDARD	26
4.2.4 TEST SETUP	26
4.2.5 EUT OPERATING CONDITIONS	27
4.2.6 EUT TEST CONDITIONS	27
4.2.7 TEST RESULTS (9K TO 30MHz)	28
4.2.8 TEST RESULTS (BETWEEN 30 TO 1000 MHz)	28
4.2.9 TEST RESULTS (ABOVE 1000 MHz)	28
5 . 26dB SPECTRUM BANDWIDTH	29
5.1 APPLIED PROCEDURES / LIMIT	29
5.1.1 TEST PROCEDURE	29
5.1.2 DEVIATION FROM STANDARD	29
5.1.3 TEST SETUP	29
5.1.4 EUT OPERATION CONDITIONS	29
5.1.5 EUT TEST CONDITIONS	30
5.1.6 TEST RESULTS	30
6 . MAXIMUM CONDUCTED OUTPUT POWER	31

Table of Contents	Page
6.1 APPLIED PROCEDURES / LIMIT	31
6.1.1 TEST PROCEDURE	31
6.1.2 DEVIATION FROM STANDARD	32
6.1.3 TEST SETUP	32
6.1.4 EUT OPERATION CONDITIONS	32
6.1.5 EUT TEST CONDITIONS	32
6.1.6 TEST RESULTS	32
7 .ANTENNA CONDUCTED SPURIOUS EMISSION	33
7.1 APPLIED PROCEDURES / LIMIT	33
7.1.1 TEST PROCEDURE	33
7.1.2 DEVIATION FROM STANDARD	33
7.1.3 TEST SETUP	33
7.1.4 EUT OPERATION CONDITIONS	33
7.1.5 EUT TEST CONDITIONS	33
7.1.6 TEST RESULTS	33
8 .POWER SPECTRAL DENSITY TEST	34
8.1 APPLIED PROCEDURES / LIMIT	34
8.1.1 TEST PROCEDURE	34
8.1.1 DEVIATION FROM STANDARD	35
8.1.2 TEST SETUP	35
8.1.3 EUT OPERATION CONDITIONS	35
8.1.4 EUT TEST CONDITIONS	35
8.1.5 TEST RESULTS	35
9 .FREQUENCY STABILITY MEASUREMENT	36
9.1 APPLIED PROCEDURES / LIMIT	36
9.1.1 TEST PROCEDURE	36
9.1.2 DEVIATION FROM STANDARD	36
9.1.3 TEST SETUP	37
9.1.4 EUT OPERATION CONDITIONS	37
9.1.5 EUT TEST CONDITIONS	37
9.1.6 TEST RESULTS	37
10 . MEASUREMENT INSTRUMENTS LIST	38
ATTACHMENTA -CONDUCTED EMISSION	40
ATTACHMENTB -RADIATED EMISSION (9KHZ TO 30MHZ)	43
ATTACHMENTC -RADIATED EMISSION (30MHZ TO 1000MHZ)	45
ATTACHMENTD -RADIATED EMISSION (ABOVE 1000MHZ)	70
ATTACHMENTE -BANDWIDTH	313
ATTACHMENTF - MAXIMUM OUTPUT POWER	359

Table of Contents

Page

ATTACHMENTG - ANTENNA CONDUCTED SPURIOUS EMISSION	430
ATTACHMENTH - POWER SPECTRAL DENSITY	575
ATTACHMENTI-FREQUENCY STABILITY	894

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-3-1407C034B	Original Issue.	Jun. 10, 2015

1. CERTIFICATION

Equipment : Outdoor Wireless LAN Access Point
Brand Name : HUAWEI
Model Name : AP8130DN
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.China
Date of Test : Mar. 09, 2015 ~ Jun. 08, 2015
Test Sample : ENGINEERING SAMPLE
Standard(s) : FCC Part15, Subpart E(15.407) / ANSI C63.4: 2009
FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-3-1407C034B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the 5GHz module which is support 5GHz only.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
15.207	AC Power Line Conducted Emissions	PASS	
15.407(a)	26dB Spectrum Bandwidth	PASS	
15.407(a)	Maximum Conducted Output Power	PASS	
15.407(a)	Power Spectral Density	PASS	
15.407(a)	Radiated Emissions	PASS	
15.407(b)	Band Edge Emissions	PASS	
15.407(g)	Frequency Stability	PASS	
15.203	Antenna Requirements	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 .The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)	NOTE
DG-C02	CISPR	150 KHz~30MHz	1.94	

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)	NOTE
DG-CB03	CISPR	9kHz~30MHz	V	3.79	
		9kHz~30MHz	H	3.57	
		30MHz~200MHz	V	3.82	
		30MHz~200MHz	H	3.60	
		200MHz~ 1,000MHz	V	3.86	
		200MHz~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Outdoor Wireless LAN Access Point	
Brand Name	HUAWEI	
Model Name	AP8130DN	
Mode Different	NA	
Product Description	Operation Frequency	UNII-1: 5150-5250MHz UNII-2A: 5250-5350MHz UNII-2C: 5470-5725MHz UNII-3: 5725-5850MHz
	Modulation Type	OFDM
	Bit Rate of Transmitter	Up to 1.3 Gbps
Power Source	DC voltage supplied from PoE Model:PoE 35-54A	
Power Rating	I/P: AC 100-240V 50/60Hz 1.0A MAX O/P: DC 5V 0.65A	

Output Power	Output Power (Max.)for UNII-1 (1TX)	802.11a:19.60dBm 802.11n (20M): 15.69dBm 802.11n (40M): 15.58dBm 802.11ac (20M): 15.73dBm 802.11ac (40M): 15.47dBm 802.11ac (80M): 9.71dBm
	Output Power (Max.)for UNII-2A (1TX)	802.11a:19.55dBm 802.11n (20M): 15.73dBm 802.11n (40M): 15.46dBm 802.11ac (20M): 15.71dBm 802.11ac (40M): 15.36dBm 802.11ac (80M): 9.73dBm
	Output Power (Max.)for UNII-2C (1TX)	802.11a:19.59dBm 802.11n (20M): 15.82dBm 802.11n (40M): 15.73dBm 802.11ac (20M): 15.74dBm 802.11ac (40M): 15.59dBm 802.11ac (80M): 16.75dBm
	Output Power (Max.)for UNII-3 (1TX)	802.11a:19.61dBm 802.11n (20M): 15.73dBm 802.11n (40M): 15.71dBm 802.11ac (20M): 15.78dBm 802.11ac (40M): 16.38dBm 802.11ac (80M): 11.73dBm

Output Power	Output Power (Max.)for UNII-1 (2TX)	802.11a:21.04dBm 802.11n (20M): 18.69dBm 802.11n (40M): 18.57dBm 802.11ac (20M): 18.78dBm 802.11ac (40M): 18.55dBm 802.11ac (80M): 12.81dBm
	Output Power (Max.)for UNII-2A (2TX)	802.11a:21.00dBm 802.11n (20M): 18.74dBm 802.11n (40M): 18.51dBm 802.11ac (20M): 18.72dBm 802.11ac (40M): 18.04dBm 802.11ac (80M): 12.71dBm
	Output Power (Max.)for UNII-2C (2TX)	802.11a:21.05dBm 802.11n (20M): 18.71dBm 802.11n (40M): 18.72dBm 802.11ac (20M): 18.75dBm 802.11ac (40M): 18.27dBm 802.11ac (80M): 19.72dBm
	Output Power (Max.)for UNII-3 (2TX)	802.11a:21.11dBm 802.11n (20M): 18.71dBm 802.11n (40M): 18.62dBm 802.11ac (20M): 18.79dBm 802.11ac (40M): 18.64dBm 802.11ac (80M): 14.74dBm

Output Power	Output Power (Max.)for UNII-1 (3TX)	802.11a:21.99dBm 802.11n (20M): 20.22dBm 802.11n (40M): 20.04dBm 802.11ac (20M): 20.24dBm 802.11ac (40M): 20.01dBm 802.11ac (80M): 14.56dBm
	Output Power (Max.)for UNII-2A (3TX)	802.11a:21.94dBm 802.11n (20M): 20.22dBm 802.11n (40M): 20.06dBm 802.11ac (20M): 20.23dBm 802.11ac (40M): 19.65dBm 802.11ac (80M): 14.44dBm
	Output Power (Max.)for UNII-2C (3TX)	802.11a:22.00dBm 802.11n (20M): 20.22dBm 802.11n (40M): 20.17dBm 802.11ac (20M): 20.51dBm 802.11ac (40M): 19.83dBm 802.11ac (80M): 21.53dBm
	Output Power (Max.)for UNII-3 (3TX)	802.11a:22.03dBm 802.11n (20M): 20.23dBm 802.11n (40M): 20.11dBm 802.11ac (20M): 20.27dBm 802.11ac (40M): 20.10dBm 802.11ac (80M): 16.56dBm

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Channel List:

UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580				
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

The product has 2 group antenna

Group 1 Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
A	Nippon Antenna	C15G14Z100BY	External Antenna	N-type	8	5G
B	Nippon Antenna	C15G14Z100BY	External Antenna	N-type	8	5G
C	Nippon Antenna	C15G14Z100BY	External Antenna	N-type	8	5G

Group 2 Antenna

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
A	pctel	MHODB245804 07NM-LC	External Antenna	N-type	8	5G
B	pctel	MHODB245804 07NM-LC	External Antenna	N-type	8	5G
C	pctel	MHODB245804 07NM-LC	External Antenna	N-type	8	5G

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides three completed transmitters and receivers (3T3R).
2. ANT B for 1TX was found to be the worst case and recorded.

Remark:

Antenna Gain=8dBi. So, the UNII-2A, UNII-2C out power limit is $24-8+6=22.00$, the UNII-1, UNII-3 output power limit is $30-8+6=28.00$. The UNII-1 power density limit is $17-8+6=15.00$, the UNII-2A, UNII-2C power density limit is $11-8+6=9.00$, the UNII-3 power density limit is $30-8+6=28.00$.

4.

Operating Mode TX Mode	1TX	2TX	3TX
802.11a	V (ANT B)	V (ANT A+ANT B)	V (ANT+1 ANT B+ANT C)
802.11n(20MHz)	V (ANT B)	V (ANT A+ANT B)	V (ANT+1 ANT B+ANT C)
802.11n(40MHz)	V (ANT B)	V (ANT A+ANT B)	V (ANT+1 ANT B+ANT C)
802.11ac (20MHz)	V (ANT B)	V (ANT A+ANT B)	V (ANT+1 ANT B+ANT C)
802.11ac (40MHz)	V (ANT B)	V (ANT A+ANT B)	V (ANT+1 ANT B+ANT C)
802.11ac (80MHz)	V (ANT B)	V (ANT A+ANT B)	V (ANT+1 ANT B+ANT C)

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)
Mode 25	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 25	TX Mode

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A Mode/ CH36, CH40, CH48 (UNII-1)
Mode 2	TX N20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 3	TX N40 Mode/ CH38, CH46 (UNII-1)
Mode 4	TX AC20 Mode/ CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC40 Mode/ CH38, CH46 (UNII-1)
Mode 6	TX AC80 Mode / CH42 (UNII-1)
Mode 7	TX A Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 8	TX N20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 9	TX N40 Mode/ CH54, CH62 (UNII-2A)
Mode 10	TX AC20 Mode/ CH52, CH60, CH64 (UNII-2A)
Mode 11	TX AC40 Mode/ CH54, CH62 (UNII-2A)
Mode 12	TX AC80 Mode / CH58 (UNII-2A)
Mode 13	TX A Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 14	TX N20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 15	TX N40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 16	TX AC20 Mode/ CH100, CH116, CH140 (UNII-2C)
Mode 17	TX AC40 Mode/CH102, CH110, CH134(UNII-2C)
Mode 18	TX AC80 Mode / CH106, CH122 (UNII-2C)
Mode 19	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 20	TX N20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 21	TX N40 Mode / CH151,CH159 (UNII-3)
Mode 22	TX AC20 Mode / CH149,CH157,CH165 (UNII-3)
Mode 23	TX AC40 Mode / CH151,CH159 (UNII-3)
Mode 24	TX AC80 Mode / CH155 (UNII-3)

Note:

- (1) For radiated below 1GHz test, the 802.11a mode is found to be the worst case and recorded.
- (2) For radiated, the 3TX (ANT 1+ANT 2+ANT 3) is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product

UNII-1 - 1TX			
Test Software Version	ART		
Frequency (MHz)	5180	5200	5240
A Mode	20	20	20
Frequency (MHz)	5180	5200	5240
N20 Mode	18	18	18
Frequency (MHz)	5190	5230	
N40 Mode	17	17	

UNII-2A - 1TX			
Test Software Version	ART		
Frequency (MHz)	5260	5300	5320
A Mode	20	20	20
Frequency (MHz)	5260	5300	5320
N20 Mode	18	18	18
Frequency (MHz)	5270	5310	
N40 Mode	17	17	

UNII-2C - 1TX			
Test Software Version	ART		
Frequency (MHz)	5500	5580	5700
A Mode	20	20	20
Frequency (MHz)	5500	5580	5700
N20 Mode	18	18	18
Frequency (MHz)	5510	5550	5670
N40 Mode	17	16	17

UNII-3 - 1TX			
Test Software Version	ART		
Frequency (MHz)	5745	5785	5825
A Mode	20	20	20
Frequency (MHz)	5745	5785	5825
N20 Mode	18	18	18
Frequency (MHz)	5755	5795	
N40 Mode	17	17	

UNII-1 - 1TX			
Test Software Version	ART		
Frequency (MHz)	5180	5200	5240
AC20 Mode	18	18	18
Frequency (MHz)	5190	5230	
AC40 Mode	17	17	
Frequency (MHz)	5210		
AC80 Mode	15		

UNII-2A - 1TX			
Test Software Version	ART		
Frequency (MHz)	5260	5300	5320
AC20 Mode	18	18	18
Frequency (MHz)	5270	5310	
AC40 Mode	17	17	
Frequency (MHz)	5290		
AC80 Mode	15		

UNII-2C - 1TX			
Test Software Version	ART		
Frequency (MHz)	5500	5580	5700
AC20 Mode	18	18	18
Frequency (MHz)	5510	5550	5670
AC40 Mode	17		17
Frequency (MHz)	5530	5610	
AC80 Mod	11	17	

UNII-3 - 1TX			
Test Software Version	ART		
Frequency (MHz)	5745	5785	5825
AC20 Mode	18	18	18
Frequency (MHz)	5755	5795	
AC40 Mode	17	17	
Frequency (MHz)	5775		
AC80 Mode	12		

UNII-1 - 2TX			
Test Software Version	ART		
Frequency (MHz)	5180	5200	5240
A Mode	16	16	16
Frequency (MHz)	5180	5200	5240
N20 Mode	16	16	16
Frequency (MHz)	5190	5230	
N40 Mode	14	16	

UNII-2A - 2TX			
Test Software Version	ART		
Frequency (MHz)	5260	5300	5320
A Mode	16	16	16
Frequency (MHz)	5260	5300	5320
N20 Mode	16	16	16
Frequency (MHz)	5270	5310	
N40 Mode	16	14	

UNII-2C - 2TX			
Test Software Version	ART		
Frequency (MHz)	5500	5580	5700
A Mode	16	16	16
Frequency (MHz)	5500	5580	5700
N20 Mode	16	16	16
Frequency (MHz)	5510	5550	5670
N40 Mode	16	16	16

UNII-3 - 2TX			
Test Software Version	ART		
Frequency (MHz)	5745	5785	5825
A Mode	16	16	16
Frequency (MHz)	5745	5785	5825
N20 Mode	16	16	16
Frequency (MHz)	5755	5795	
N40 Mode	16	16	

UNII-1 - 2TX			
Test Software Version	ART		
Frequency (MHz)	5180	5200	5240
AC20 Mode	16	16	16
Frequency (MHz)	5190	5230	
AC40 Mode	14	16	
Frequency (MHz)	5210		
AC80 Mode	12		

UNII-2A - 2TX			
Test Software Version	ART		
Frequency (MHz)	5260	5300	5320
AC20 Mode	16	16	16
Frequency (MHz)	5270	5310	
AC40 Mode	16	14	
Frequency (MHz)	5290		
AC80 Mode	12		

UNII-2C - 2TX			
Test Software Version	ART		
Frequency (MHz)	5500	5580	5700
AC20 Mode	16	16	16
Frequency (MHz)	5510	5550	5670
AC40 Mode	16	16	16
Frequency (MHz)	5530	5610	
AC80 Mode	12	17	

UNII-3 - 2TX			
Test Software Version	ART		
Frequency (MHz)	5745	5785	5825
AC20 Mode	16	16	16
Frequency (MHz)	5755	5795	
AC40 Mode	16	16	
Frequency (MHz)	5775		
AC80 Mode	12		

UNII-1 - 3TX			
Test Software Version	RT		
Frequency (MHz)	5180	5200	5240
A Mode	15	15	15
Frequency (MHz)	5180	5200	5240
N20 Mode	15	15	15
Frequency (MHz)	5190	5230	
N40 Mode	12	15	

UNII-2A - 3TX			
Test Software Version	ART		
Frequency (MHz)	5260	5300	5320
A Mode	15	15	15
Frequency (MHz)	5260	5300	5320
N20 Mode	15	15	15
Frequency (MHz)	5270	5310	
N40 Mode	15	12	

UNII-2C - 3TX			
Test Software Version	ART		
Frequency (MHz)	5500	5580	5700
A Mode	15	15	15
Frequency (MHz)	5500	5580	5700
N20 Mode	15	15	15
Frequency (MHz)	5510	5550	5670
N40 Mode	15	15	15

UNII-3 - 3TX			
Test Software Version	ART		
Frequency (MHz)	5745	5785	5825
A Mode	15	15	15
Frequency (MHz)	5745	5785	5825
N20 Mode	15	15	15
Frequency (MHz)	5755	5795	
N40 Mode	15	15	


UNII-1 - 3TX			
Test Software Version	ART		
Frequency (MHz)	5180	5200	5240
AC20 Mode	15	15	15
Frequency (MHz)	5190	5230	
AC40 Mode	12	15	
Frequency (MHz)	5210		
AC80 Mode	10		

UNII-2A - 3TX			
Test Software Version	ART		
Frequency (MHz)	5260	5300	5320
AC20 Mode	15	15	15
Frequency (MHz)	5270	5310	
AC40 Mode	15	12	
Frequency (MHz)	5290		
AC80 Mode	10		

UNII-2C - 3TX			
Test Software Version	ART		
Frequency (MHz)	5500	5580	5700
AC20 Mode	15	15	15
Frequency (MHz)	5510	5550	5670
AC40 Mode	15	15	15
Frequency (MHz)	5530	5610	
AC80 Mode	10	17	

UNII-3 - 3TX			
Test Software Version	ART		
Frequency (MHz)	5745	5785	5825
AC20 Mode	15	15	15
Frequency (MHz)	5755	5795	
AC40 Mode	15	15	
Frequency (MHz)	5775		
AC80 Mode	12		

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

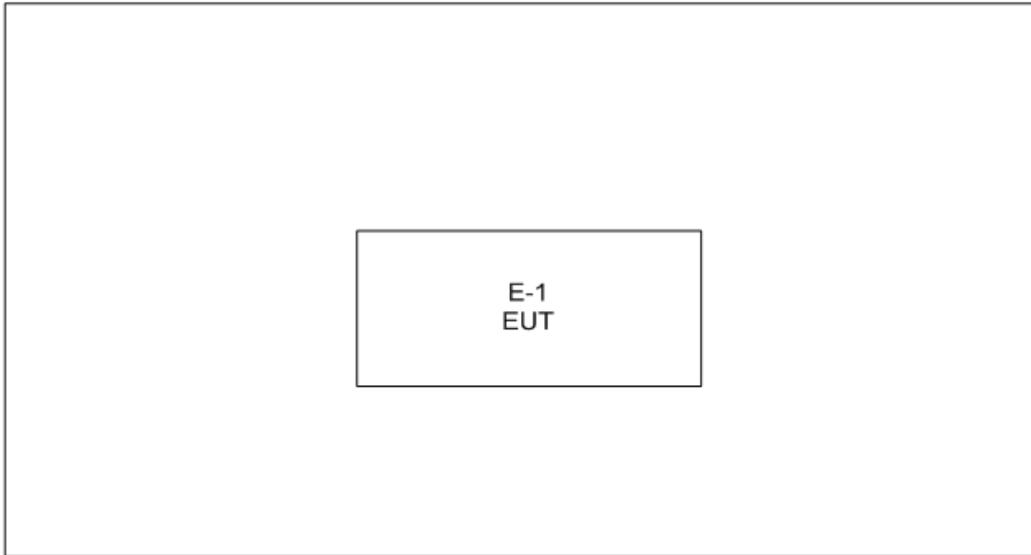

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150kHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TESTSETUP

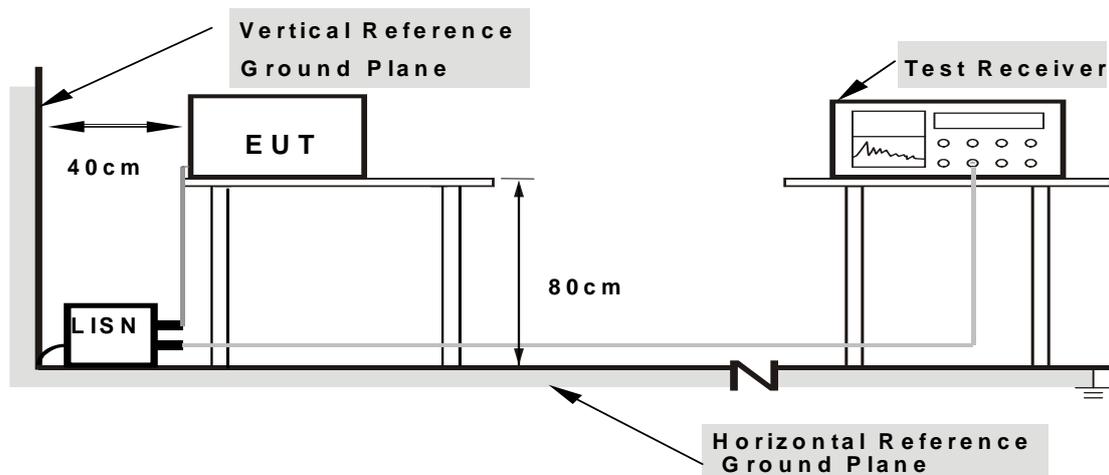

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX Mode mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150kHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequencies (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dB μ V/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (beyond 10MHz of the bandedge)	68.3
	-17 (within 10 MHz of band edge)	78.3

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field

strength: $E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m}$, where P is the eirp (Watts)

4.2.2 TESTPROCEDURE


- a. The measuring distance of at 3m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1GHz

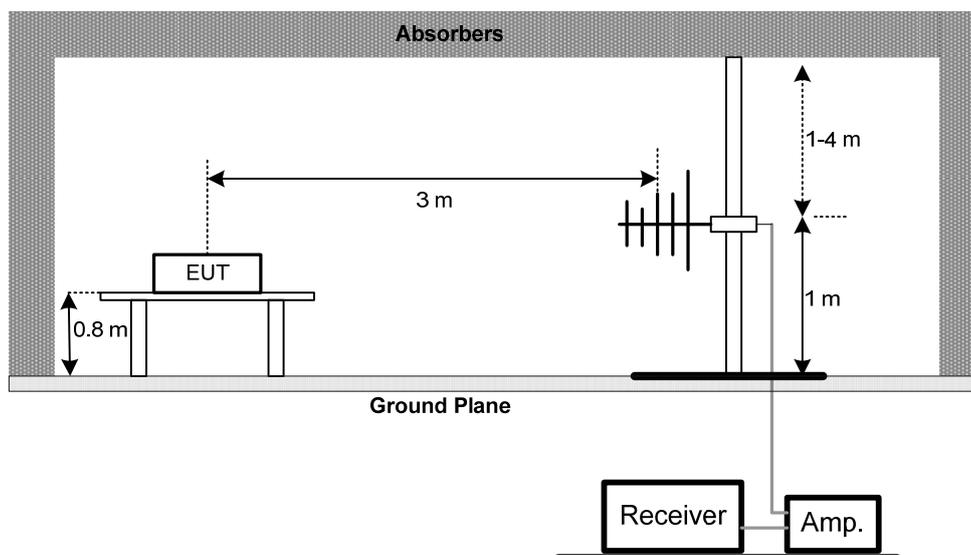

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

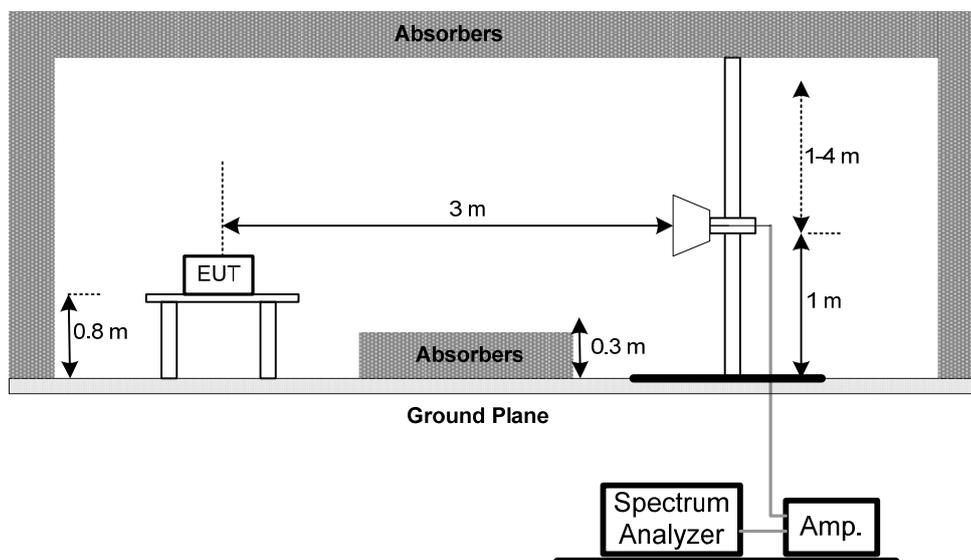

(C) Radiated emissions below 30MHz

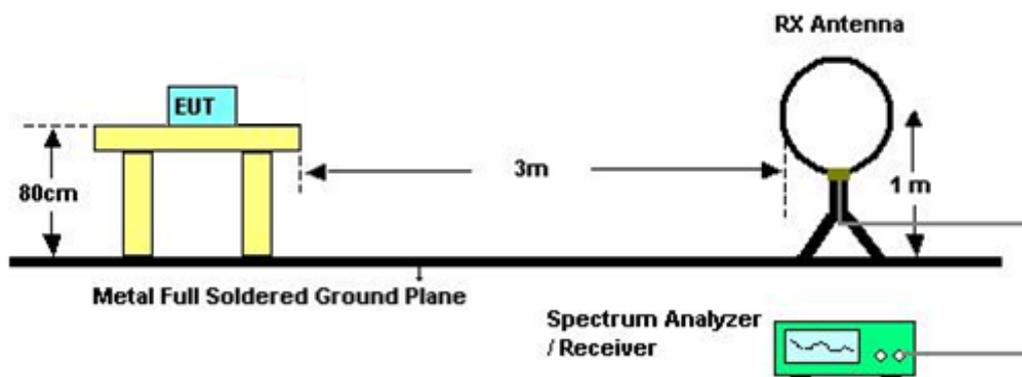

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

4.2.7 TEST RESULTS (9K TO 30MHz)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS(BETWEEN30 TO 1000 MHz)

Please refer to the Attachment C.

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Modewith Detector BW=120kHz ; SPA setting in RBW=120kHz, VBW =120kHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.9 TEST RESULTS (ABOVE1000 MHz)

Please refer to the Attachment D.

Remark:

- (1) Spectrum Setting: 30MHz – 1000MHz , RBW= 100kHz, VBW=100kHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (4) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (7) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.
- (8) No limit:This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5.26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Bandwidth	26 dB Bandwidth	5150-5250	PASS
	26 dB Bandwidth	5250-5350	PASS
	26 dB Bandwidth	5470-5725	PASS
	Minimum 500kHz 6dB Bandwidth	5725-5850	PASS

5.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	300 kHz
VBW	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

c. Measured the spectrum width with power higher than 26dB below carrier

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

5.1.6TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Conducted Output Power	Fixed:1 Watt (30dBm) Mobile and portable: 250mW (24dBm)	5150-5250	PASS
	250mW (24dBm)	5250-5350	PASS
	250mW (24dBm)	5470-5725	PASS
	1 Watt (30dBm)	5725-5850	PASS
Note: The maximum e.i.r.p at anyelevation angle above 30 degrees as measured from the horizon must not exceed 125mW(21dBm)			

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) ofthe signal
RBW	= 1MHz.
VBW	\geq 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	auto

c. Test was performed in accordance with method of KDB 789033 D02.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP**6.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7.ANTENNA CONDUCTED SPURIOUS EMISSION

7.1APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Antenna conducted Spurious Emission	-27dBm/MHz	5150-5250	PASS
	-27dBm/MHz	5250-5350	PASS
	-27dBm/MHz	5470-5725	PASS
	Below -17dBm/MHz within 10MHz of band edge, below -27dBm/MHz beyond 10MHz of the band edge	5725-5850	PASS

7.1.1TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
RBW	1000kHz
VBW	1000kHz
Trace	Max Hold
Sweep Time	Auto

7.1.2DEVIATION FROM STANDARD

No deviation.

7.1.3TEST SETUP



7.1.4EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

7.1.6TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	Other then Mobile and portable:17dBm/MHz Mobile and portable:11dBm/MHz	5150-5250	PASS
	11dBm/MHz	5250-5350	PASS
	11dBm/MHz	5470-5725	PASS
	30dBm/500kHz	5725-5850	PASS

8.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) ofthe signal
RBW	= 1MHz.
VBW	≥ 3MHz.
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

Note:

- 1.For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v01, section II.F.5., it is acceptable to set RBW at 1MHz and VBW at 3MHz if the spectrum analyzer does not have 500kHz RBW.
- 2.The value measured with RBW=1MHz is to be added with $10\log(500\text{kHz}/1\text{MHz})$ which is -3dB. For example, if the measured value is +10dBm using RBW=1MHz (that is +10dBm/MHz), then the converted value will be +7dBm/500kHz.

8.1.1 DEVIATION FROM STANDARD

No deviation.

8.1.2 TEST SETUP



8.1.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.4 EUT TEST CONDITIONS

Temperature: 28°C Relative Humidity: 60% Test Voltage: AC 120V/60Hz

8.1.5 TEST RESULTS

Please refer to the Attachment H.

9.FREQUENCY STABILITY MEASUREMENT

9.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
Frequency Stability	Specified in the user's manual	5150-5250	PASS
		5250-5350	PASS
		5470-5725	PASS
		5725-5850	PASS

9.1.1 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10kHz
Sweep Time	Auto


c. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

d. User manual temperature is 0°C~50°C.

9.1.2 DEVIATION FROM STANDARD

No deviation.

9.1.3 TEST SETUP

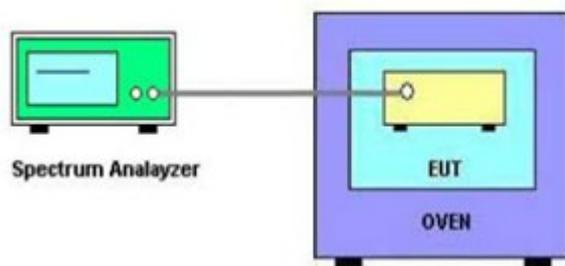

9.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 Unless otherwise a special operating condition is specified in the follows during the testing.

9.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: AC 120V/60Hz

9.1.6 TEST RESULTS

Please refer to the Attachment I.

10. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016
2	LISN	R&S	ENV216	101447	Mar. 28, 2016
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 13, 2016
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 17, 2015
3	Receiver	AGILENT	N9038A	MY52130039	Sep. 30, 2015
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jul. 01, 2015
5	Antenna	ETS	3115	00075789	Mar. 28, 2016
6	Amplifier	Agilent	8449B	3008A02274	Nov. 02, 2015
7	Receiver	AGILENT	N9038A	MY52130039	Sep. 30, 2015
8	Test Cable	emci	EMC104-SM-SM-10000(1GHz – 18GHz)	C-68	Jul. 01, 2015
9	Controller	CT	SC100	N/A	N/A
10	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Mar. 28, 2016
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Aug. 16, 2015
13	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Spectrum Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015

Maximum Conducted Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	power Meter	ANRITSU	ML2495A	1128009	Mar. 28, 2016
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 28, 2016

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015


Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May 23, 2016

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

ATTACHMENT A - CONDUCTED EMISSION

Test Mode: TX MODE

Line

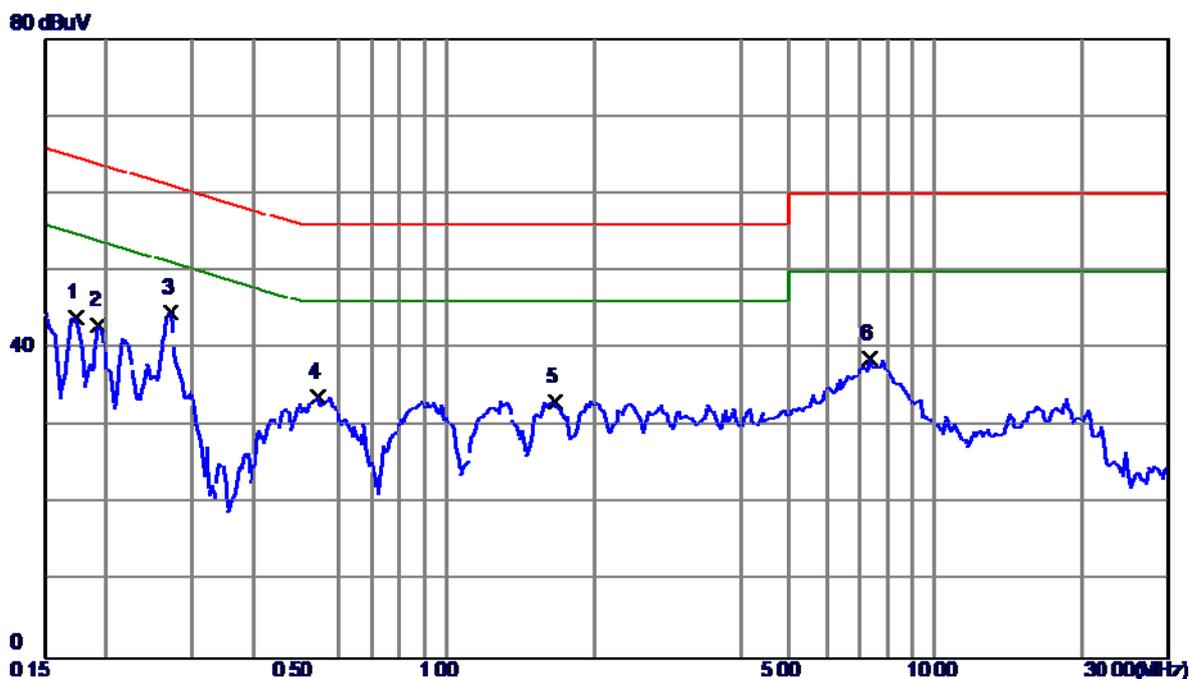


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1734	34.42	9.56	43.98	64.80	-20.82	Peak	
2	0.1930	33.42	9.57	42.99	63.91	-20.92	Peak	
3	0.2711	34.96	9.63	44.59	61.08	-16.49	Peak	
4	0.5445	23.99	9.70	33.69	56.00	-22.31	Peak	
5	1.6695	23.32	9.87	33.19	56.00	-22.81	Peak	
6	7.3359	28.77	9.91	38.68	60.00	-21.32	Peak	

Note : The test result has included the cable loss.

Test Mode: TX MODE

Neutral

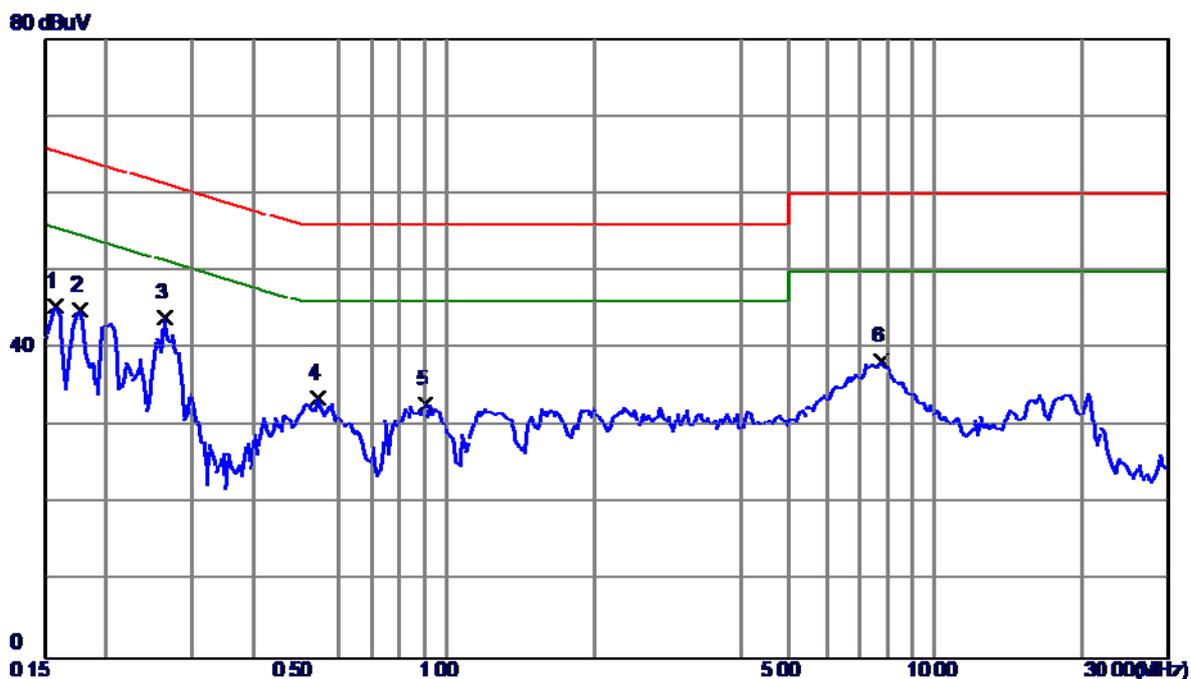

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1578	36.02	9.49	45.51	65.58	-20.07	Peak	
2	0.1773	35.53	9.48	45.01	64.61	-19.60	Peak	
3	0.2633	34.44	9.51	43.95	61.33	-17.38	Peak	
4	0.5445	23.97	9.56	33.53	56.00	-22.47	Peak	
5	0.9039	23.22	9.58	32.80	56.00	-23.20	Peak	
6	7.7539	28.49	9.85	38.34	60.00	-21.66	Peak	

Note : The test result has included the cable loss.

ATTACHMENTB -RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode:	TX MODE (Adapter 1)
------------	---------------------


Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0079	0°	13.25	25.0663	38.3163	129.6517	-91.3353	AVG
0.0079	0°	16.05	25.0663	41.1163	149.6517	-108.5353	PEAK
0.0215	0°	9.16	24.2050	33.3650	120.9555	-87.5905	AVG
0.0215	0°	10.58	24.2050	34.7850	140.9555	-106.1705	PEAK
0.0369	0°	6.39	23.2297	29.6197	116.2637	-86.6440	AVG
0.0369	0°	8.97	23.2297	32.1997	136.2637	-104.0640	PEAK
0.0458	0°	3.28	22.6660	25.9460	114.3869	-88.4409	AVG
0.0458	0°	5.66	22.6660	28.3260	134.3869	-106.0609	PEAK
0.4913	0°	21.09	19.8209	40.9109	73.7773	-32.8664	QP
1.7361	0°	23.79	19.5264	43.3164	69.5400	-26.2236	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Note
0.0085	90°	12.39	24.3000	36.6900	129.0158	-92.3258	AVG
0.0085	90°	14.82	24.3000	39.1200	149.0158	-109.8958	PEAK
0.0213	90°	9.66	24.2177	33.8777	121.0366	-87.1590	AVG
0.0213	90°	12.45	24.2177	36.6677	141.0366	-104.3690	PEAK
0.0329	90°	7.34	23.4830	30.8230	117.2603	-86.4373	AVG
0.0329	90°	10.82	23.4830	34.3030	137.2603	-102.9573	PEAK
0.0417	90°	5.33	22.9257	28.2557	115.2015	-86.9458	AVG
0.0417	90°	7.85	22.9257	30.7757	135.2015	-104.4258	PEAK
0.4936	90°	22.39	19.8154	42.2054	73.7367	-31.5314	QP
1.7138	90°	24.69	19.5286	44.2186	69.5400	-25.3214	QP

ATTACHMENTC -RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter 1)


Vertical

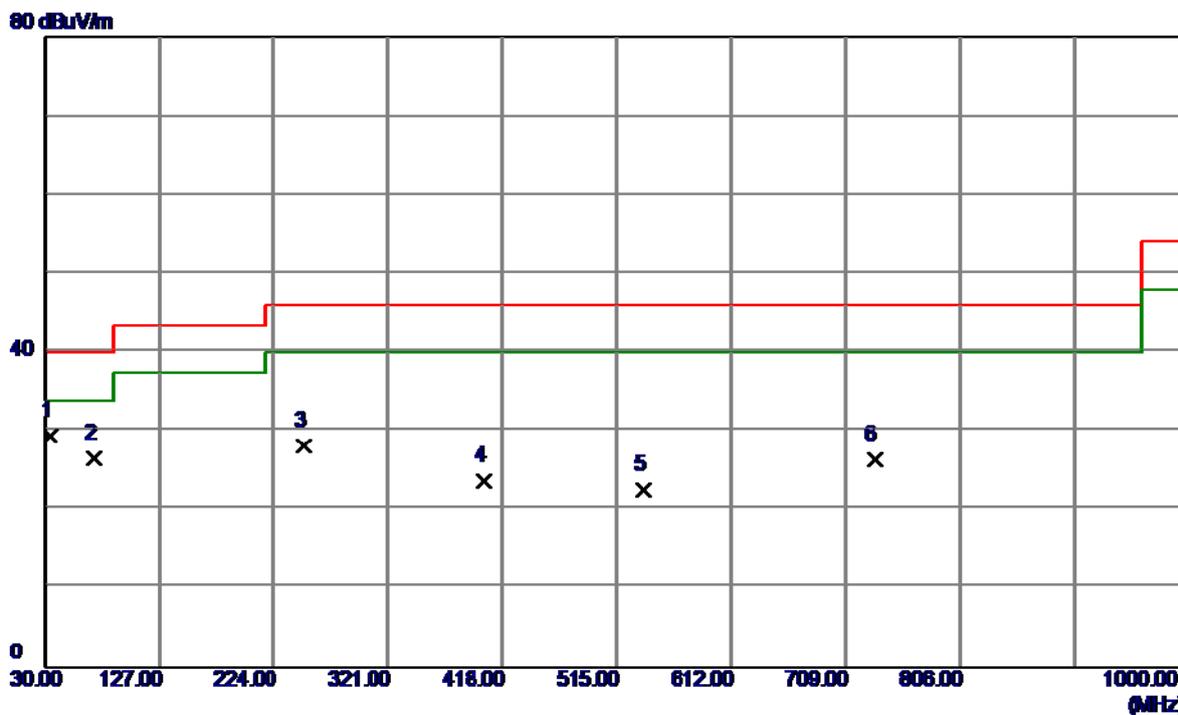

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	33.8800	44.39	-14.94	29.45	40.00	-10.55	Peak	
2	71.7100	42.87	-16.37	26.50	40.00	-13.50	Peak	
3	250.1900	42.20	-14.02	28.18	46.00	-17.82	Peak	
4	402.4800	33.21	-9.48	23.73	46.00	-22.27	Peak	
5	537.3100	31.20	-8.59	22.61	46.00	-23.39	Peak	
6	733.2500	31.19	-4.73	26.46	46.00	-19.54	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter 1)


Horizontal

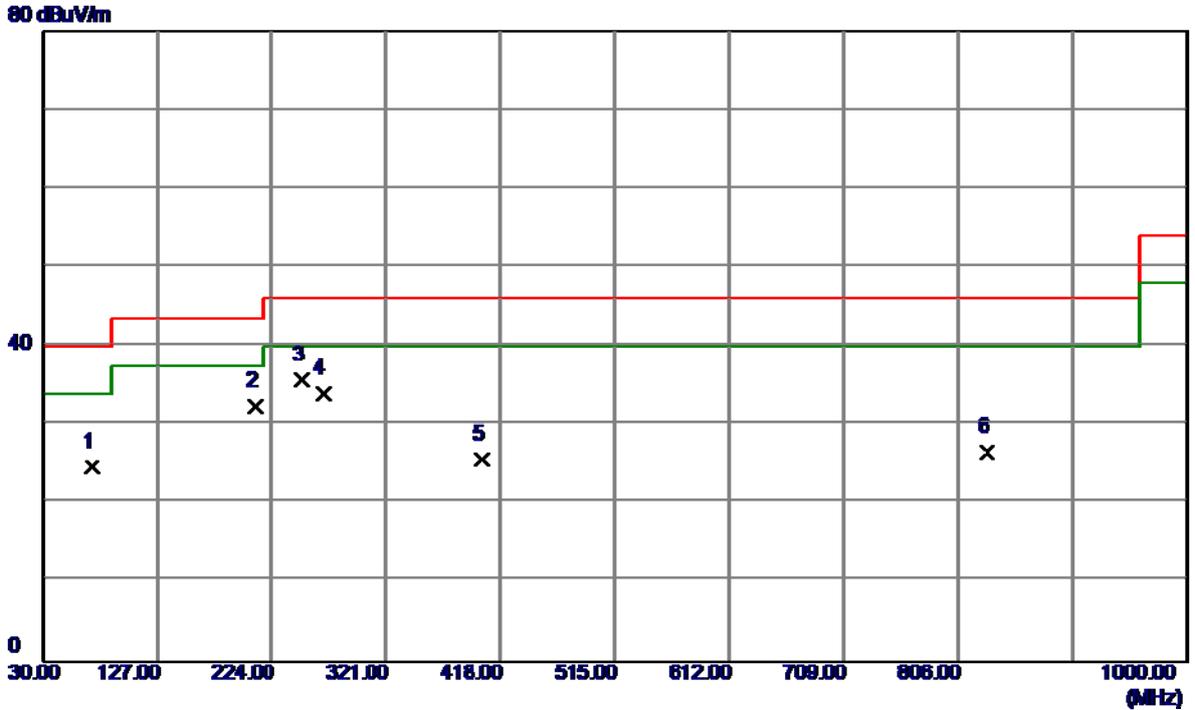

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	71.7100	41.06	-16.37	24.69	40.00	-15.31	Peak	
2	210.4200	47.70	-15.38	32.32	43.50	-11.18	Peak	
3	250.1900	49.67	-14.02	35.65	46.00	-10.35	Peak	
4	267.6500	47.20	-13.35	33.85	46.00	-12.15	Peak	
5	402.4800	35.07	-9.48	25.59	46.00	-20.41	Peak	
6	831.2199	29.64	-3.05	26.59	46.00	-19.41	Peak	

Test Mode: UNII-1/TX A Mode 5200MHz(Adapter 1)


Vertical

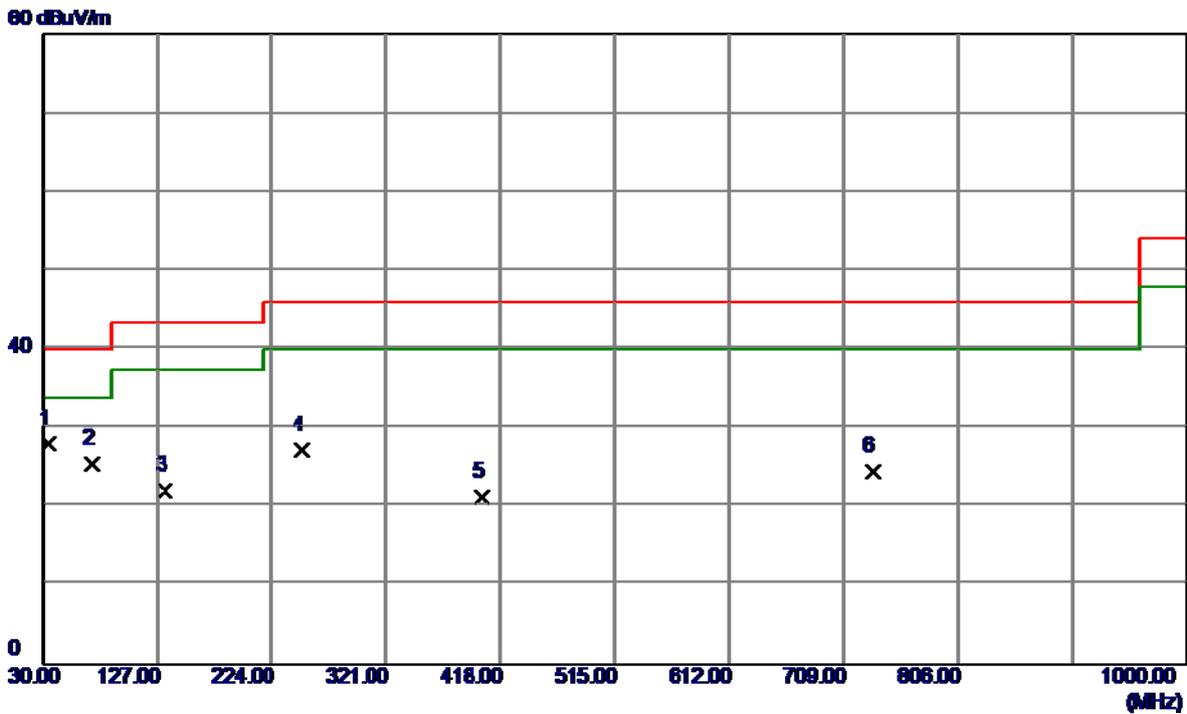

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	33.8800	42.89	-14.94	27.95	40.00	-12.05	Peak	
2	71.7100	41.87	-16.37	25.50	40.00	-14.50	Peak	
3	133.7899	35.22	-13.10	22.12	43.50	-21.38	Peak	
4	250.1900	41.20	-14.02	27.18	46.00	-18.82	Peak	
5	402.4800	30.71	-9.48	21.23	46.00	-24.77	Peak	
6	733.2500	29.19	-4.73	24.46	46.00	-21.54	Peak	

Test Mode: UNII-1/TX A Mode 5200MHz(Adapter 1)


Horizontal

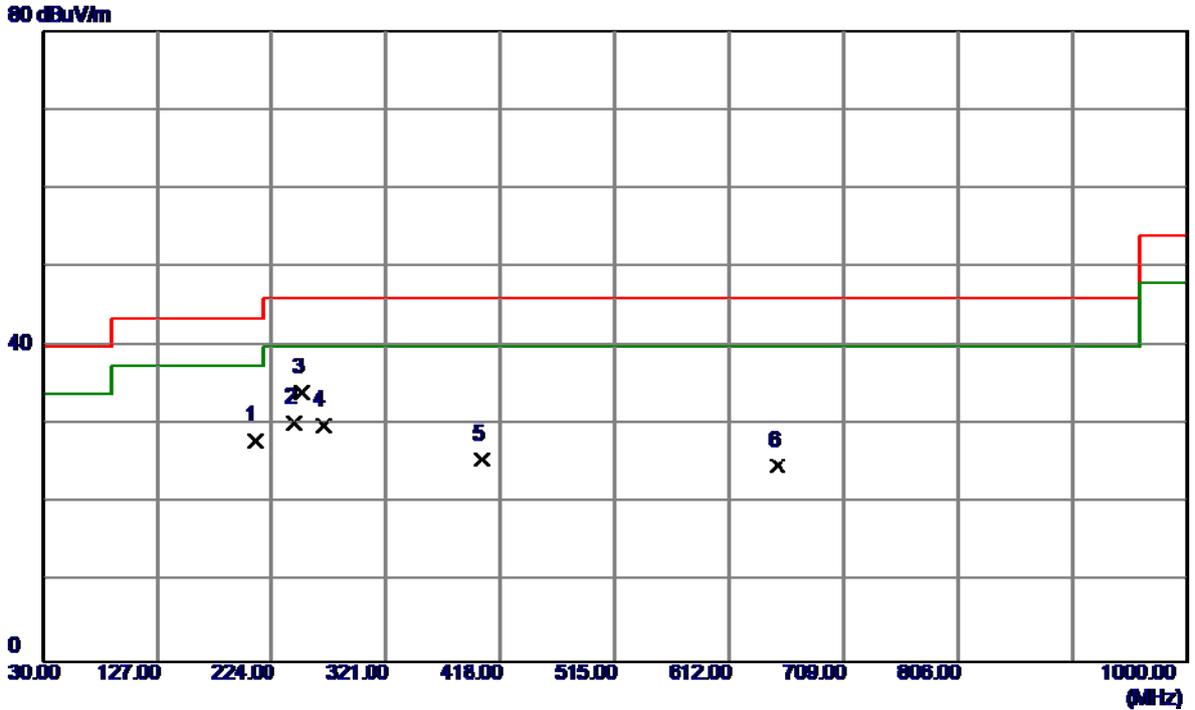

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	209.4500	43.40	-15.38	28.02	43.50	-15.48	Peak	
2	243.4000	44.30	-14.03	30.27	46.00	-15.73	Peak	
3	250.1900	48.17	-14.02	34.15	46.00	-11.85	Peak	
4	267.6500	43.20	-13.35	29.85	46.00	-16.15	Peak	
5	402.4800	35.07	-9.48	25.59	46.00	-20.41	Peak	
6	652.7400	29.97	-5.14	24.83	46.00	-21.17	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter 1)


Vertical

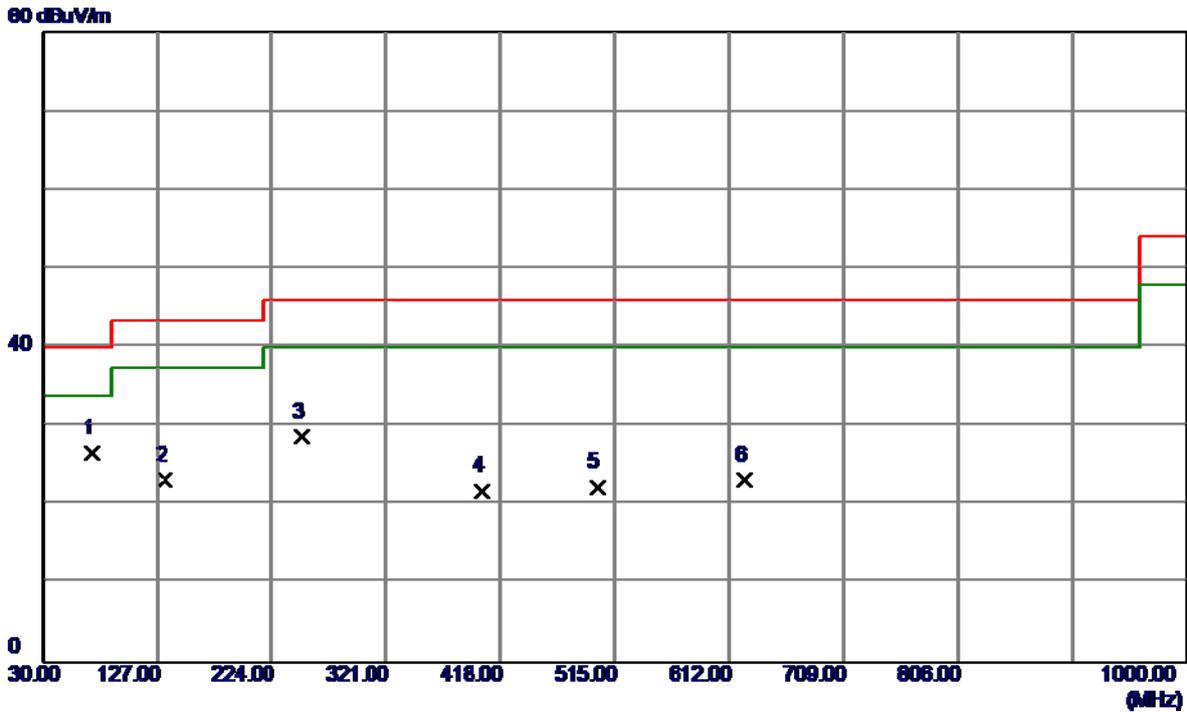

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	71.7100	42.87	-16.37	26.50	40.00	-13.50	Peak	
2	133.7899	36.22	-13.10	23.12	43.50	-20.38	Peak	
3	250.1900	42.70	-14.02	28.68	46.00	-17.32	Peak	
4	402.4800	31.21	-9.48	21.73	46.00	-24.27	Peak	
5	500.4500	32.73	-10.50	22.23	46.00	-23.77	Peak	
6	624.6100	29.67	-6.55	23.12	46.00	-22.88	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter 1)


Horizontal

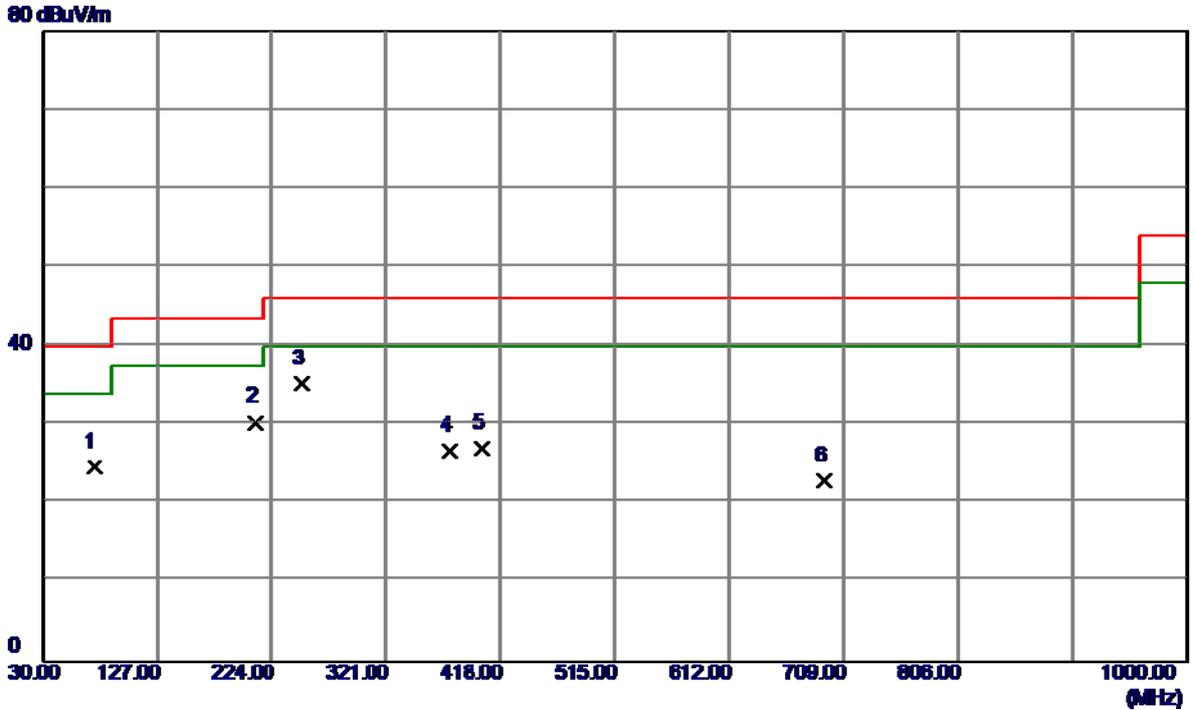

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	73.6500	41.16	-16.51	24.65	40.00	-15.35	Peak	
2	210.4200	45.70	-15.38	30.32	43.50	-13.18	Peak	
3	250.1900	49.17	-14.02	35.15	46.00	-10.85	Peak	
4	375.3200	37.35	-10.65	26.70	46.00	-19.30	Peak	
5	402.4800	36.57	-9.48	27.09	46.00	-18.91	Peak	
6	692.5100	27.77	-4.96	22.81	46.00	-23.19	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter 1)


Vertical

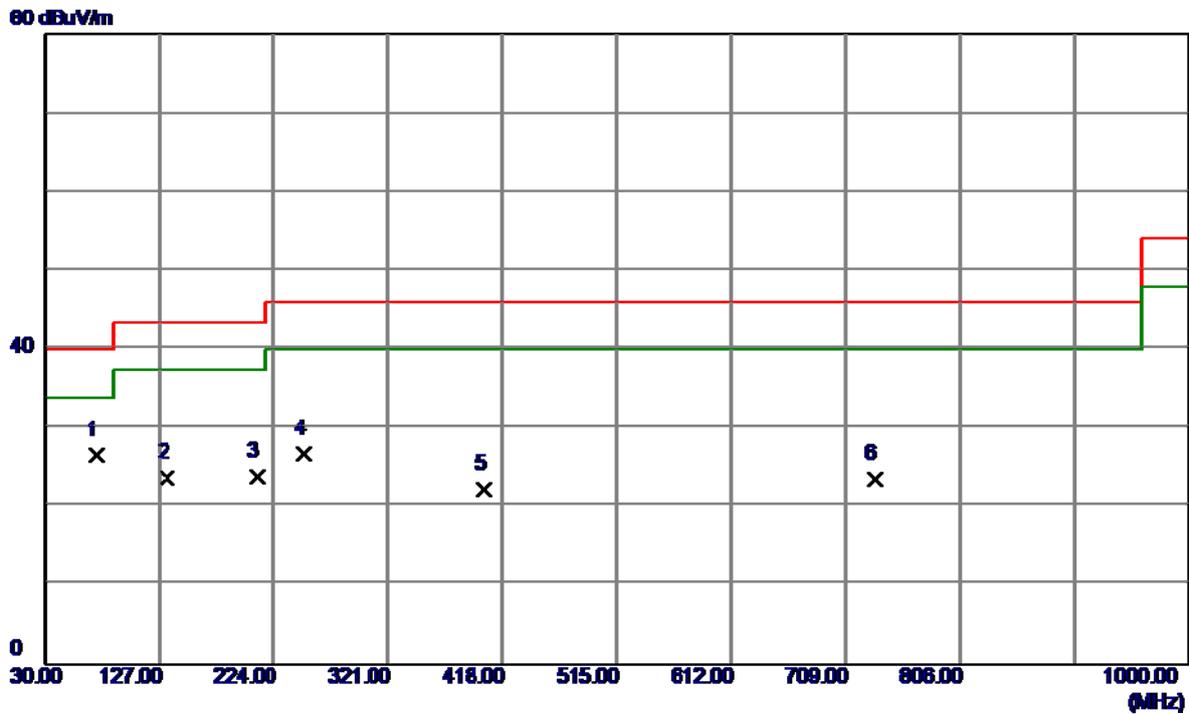

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	73.6500	43.00	-16.51	26.49	40.00	-13.51	Peak	
2	133.7899	36.72	-13.10	23.62	43.50	-19.88	Peak	
3	209.4500	39.18	-15.38	23.80	43.50	-19.70	Peak	
4	250.1900	40.70	-14.02	26.68	46.00	-19.32	Peak	
5	402.4800	31.71	-9.48	22.23	46.00	-23.77	Peak	
6	733.2500	28.19	-4.73	23.46	46.00	-22.54	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter 1)


Horizontal

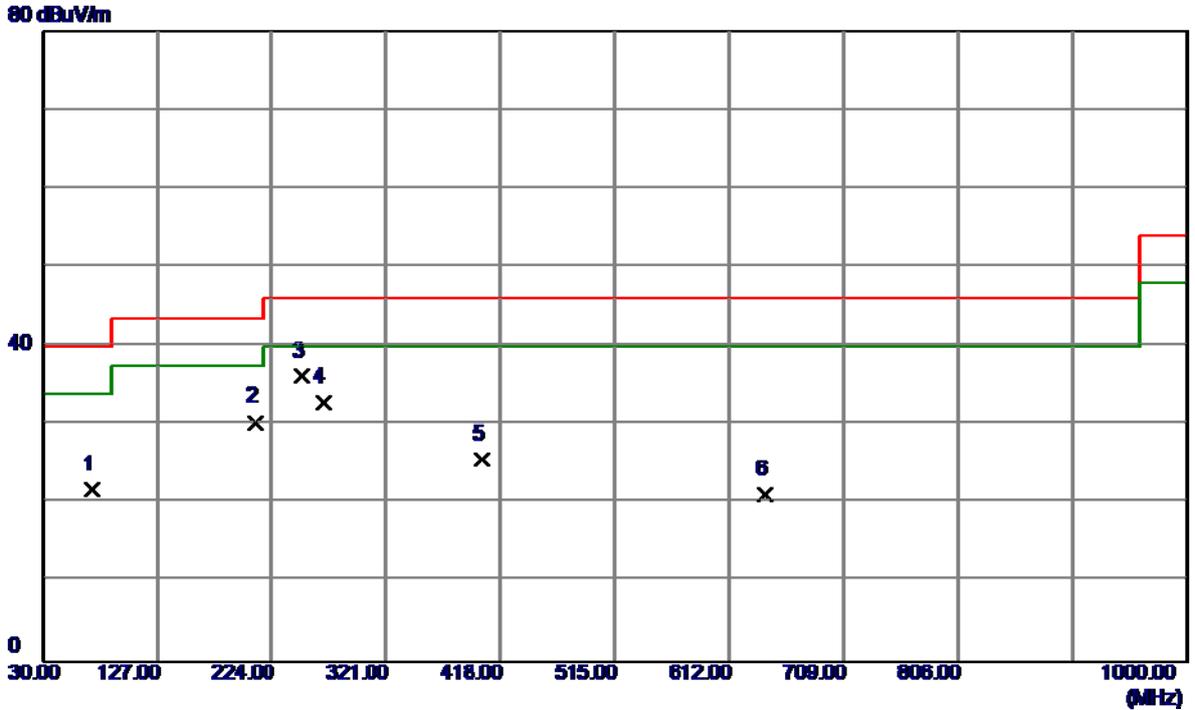

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	71.7100	38.06	-16.37	21.69	40.00	-18.31	Peak	
2	210.4200	45.70	-15.38	30.32	43.50	-13.18	Peak	
3	250.1900	50.17	-14.02	36.15	46.00	-9.85	Peak	
4	267.6500	46.20	-13.35	32.85	46.00	-13.15	Peak	
5	402.4800	35.07	-9.48	25.59	46.00	-20.41	Peak	
6	642.0700	26.69	-5.59	21.10	46.00	-24.90	Peak	

Test Mode: UNII-2A/TX A Mode 5300MHz(Adapter 1)


Vertical

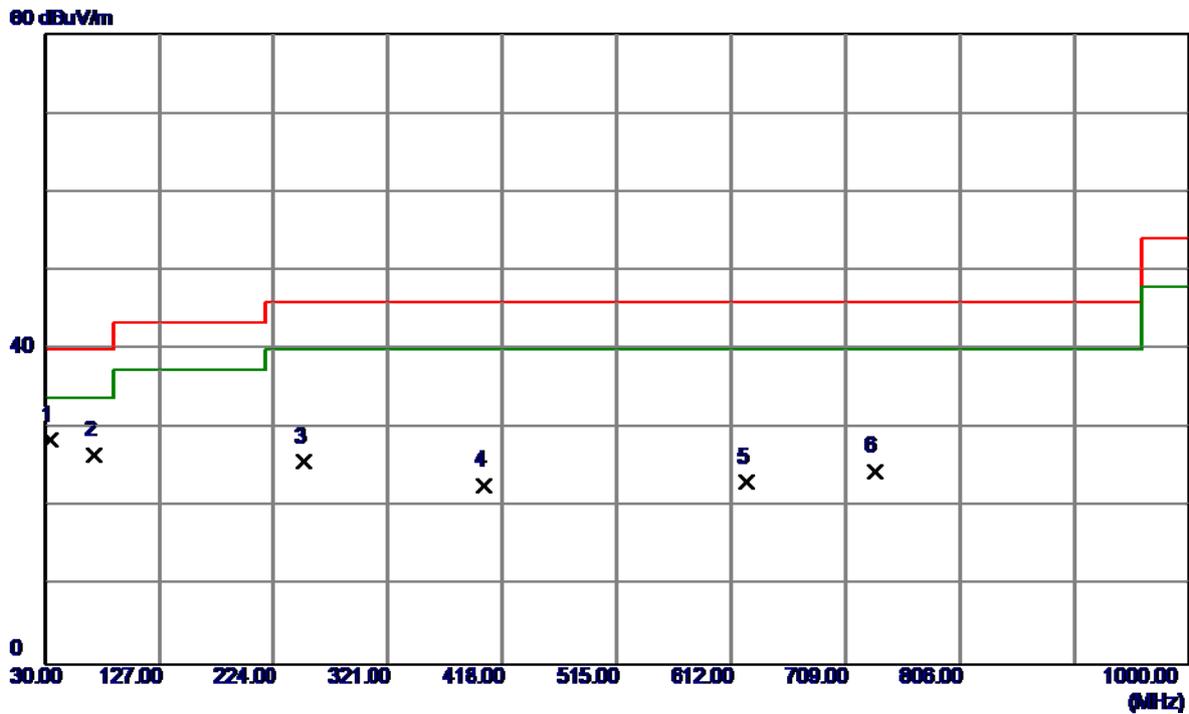

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	33.8800	43.39	-14.94	28.45	40.00	-11.55	Peak	
2	71.7100	42.87	-16.37	26.50	40.00	-13.50	Peak	
3	250.1900	39.70	-14.02	25.68	46.00	-20.32	Peak	
4	402.4800	32.21	-9.48	22.73	46.00	-23.27	Peak	
5	624.6100	29.67	-6.55	23.12	46.00	-22.88	Peak	
6	733.2500	29.19	-4.73	24.46	46.00	-21.54	Peak	

Test Mode: UNII-2A/TX A Mode 5300MHz(Adapter 1)


Horizontal

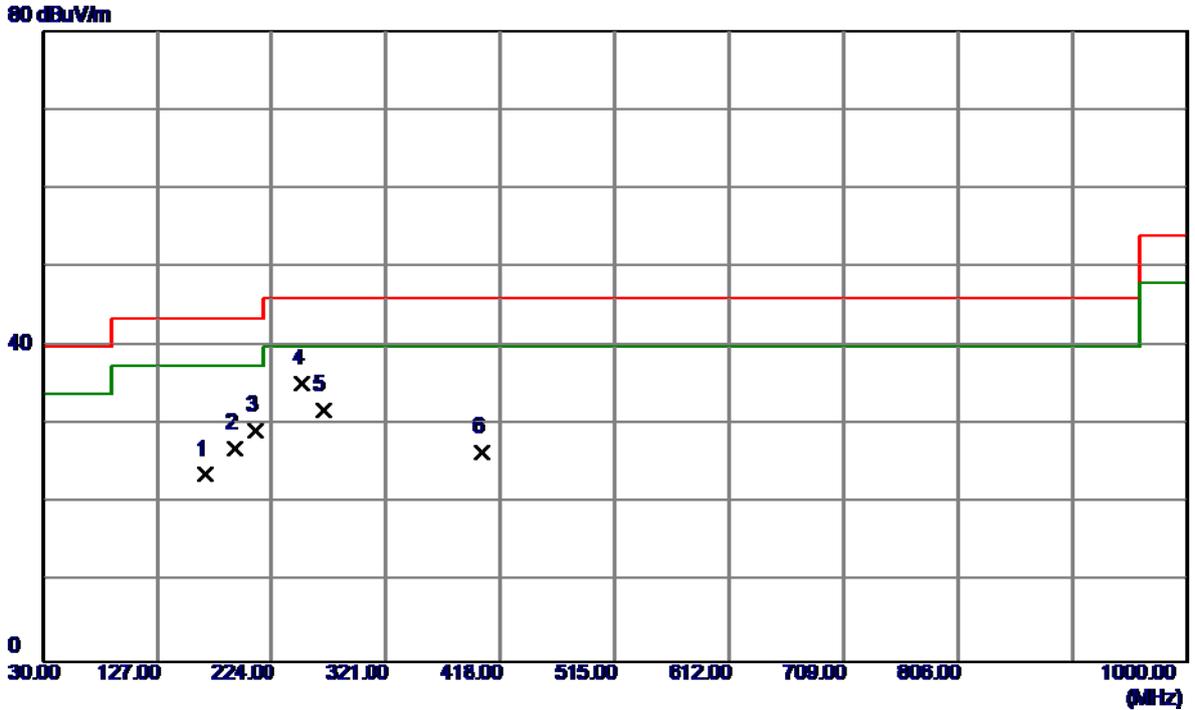

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	167.7400	36.70	-13.00	23.70	43.50	-19.80	Peak	
2	192.9600	41.65	-14.54	27.11	43.50	-16.39	Peak	
3	210.4200	44.70	-15.38	29.32	43.50	-14.18	Peak	
4	250.1900	49.17	-14.02	35.15	46.00	-10.85	Peak	
5	267.6500	45.20	-13.35	31.85	46.00	-14.15	Peak	
6	402.4800	36.07	-9.48	26.59	46.00	-19.41	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter 1)


Vertical

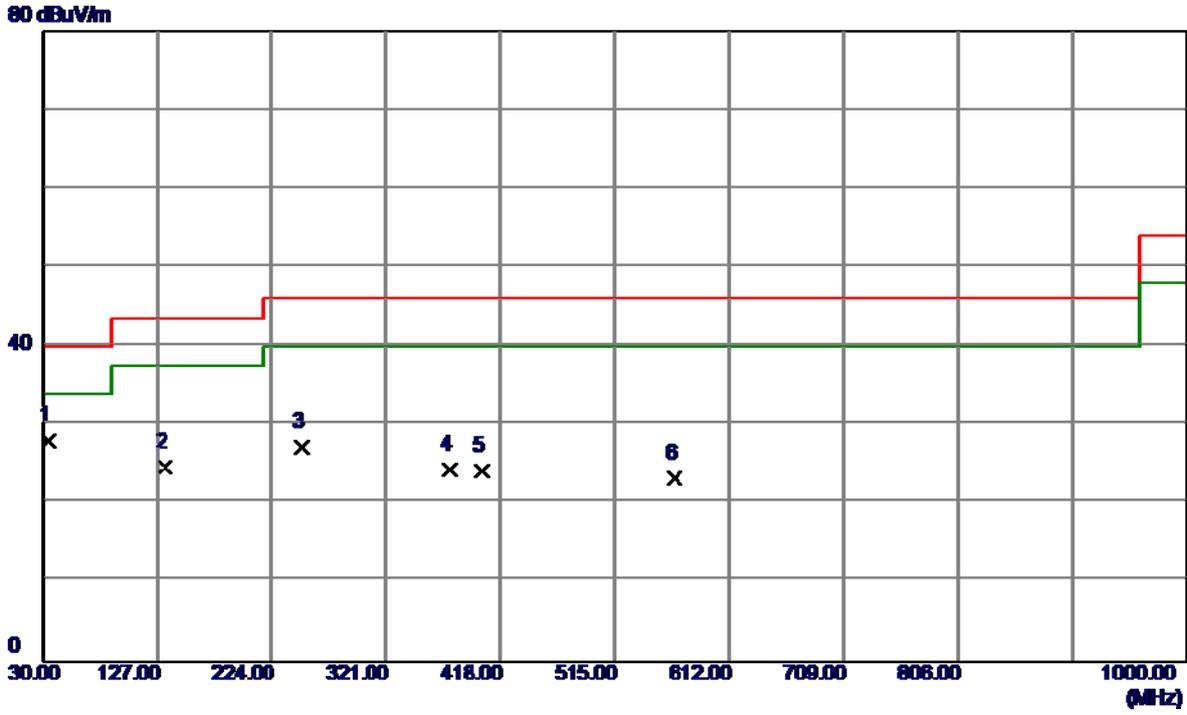

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	33.8800	42.89	-14.94	27.95	40.00	-12.05	Peak	
2	133.7899	37.72	-13.10	24.62	43.50	-18.88	Peak	
3	250.1900	41.20	-14.02	27.18	46.00	-18.82	Peak	
4	375.3200	34.99	-10.65	24.34	46.00	-21.66	Peak	
5	402.4800	33.71	-9.48	24.23	46.00	-21.77	Peak	
6	565.4400	31.18	-7.92	23.26	46.00	-22.74	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter 1)


Horizontal

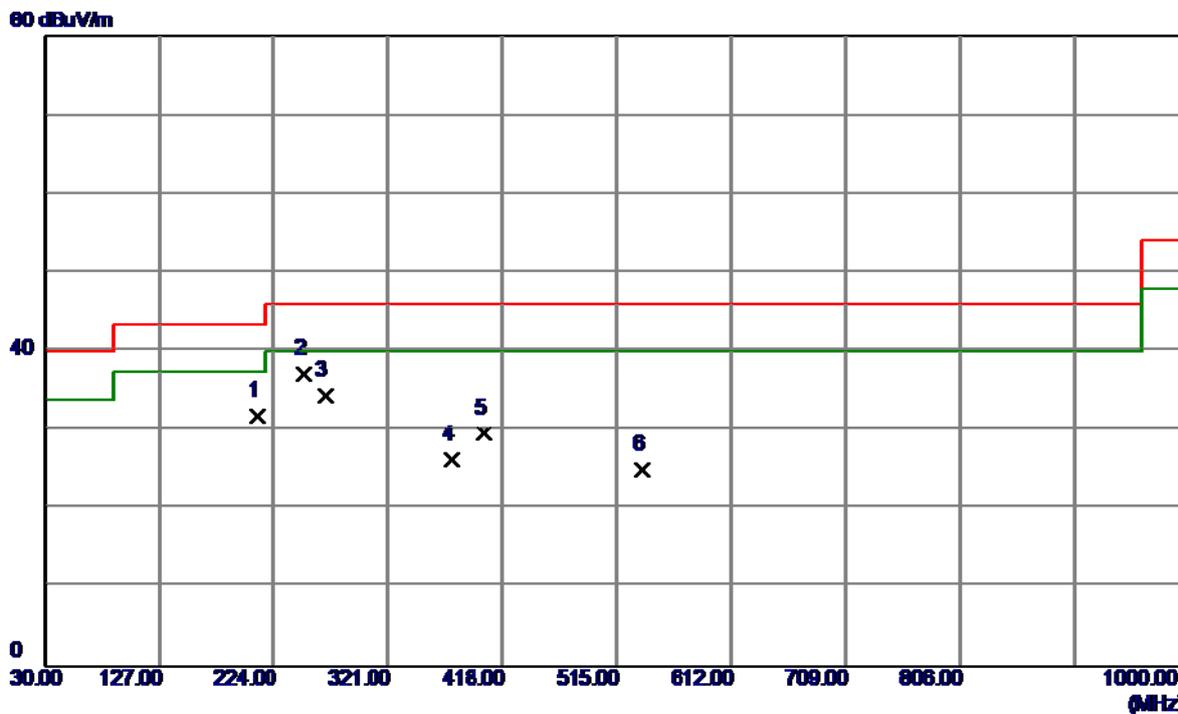

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	210.4200	47.20	-15.38	31.82	43.50	-11.68	Peak	
2	250.1900	51.17	-14.02	37.15	46.00	-8.85	Peak	
3	267.6500	47.70	-13.35	34.35	46.00	-11.65	Peak	
4	375.3200	36.85	-10.65	26.20	46.00	-19.80	Peak	
5	402.4800	39.07	-9.48	29.59	46.00	-16.41	Peak	
6	536.3400	33.60	-8.64	24.96	46.00	-21.04	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter 1)


Vertical

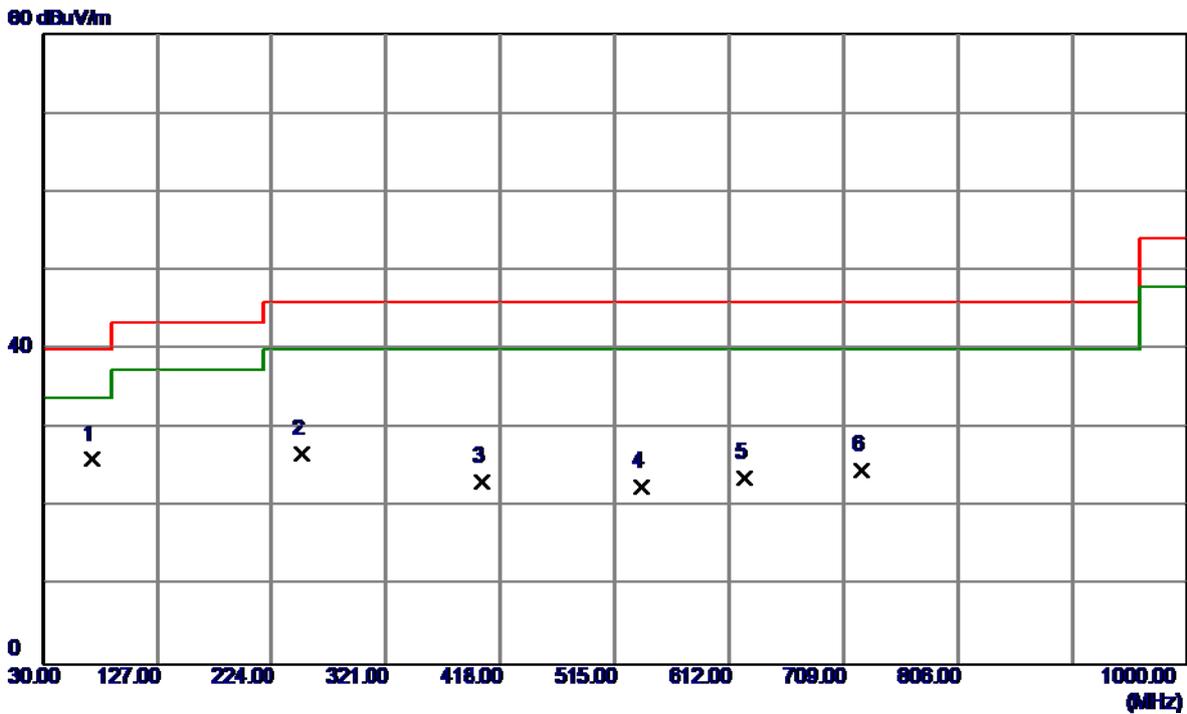

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	71.7100	42.37	-16.37	26.00	40.00	-14.00	Peak	
2	250.1900	40.70	-14.02	26.68	46.00	-19.32	Peak	
3	402.4800	32.71	-9.48	23.23	46.00	-22.77	Peak	
4	537.3100	31.20	-8.59	22.61	46.00	-23.39	Peak	
5	624.6100	30.17	-6.55	23.62	46.00	-22.38	Peak	
6	724.5200	29.48	-4.78	24.70	46.00	-21.30	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter 1)


Horizontal

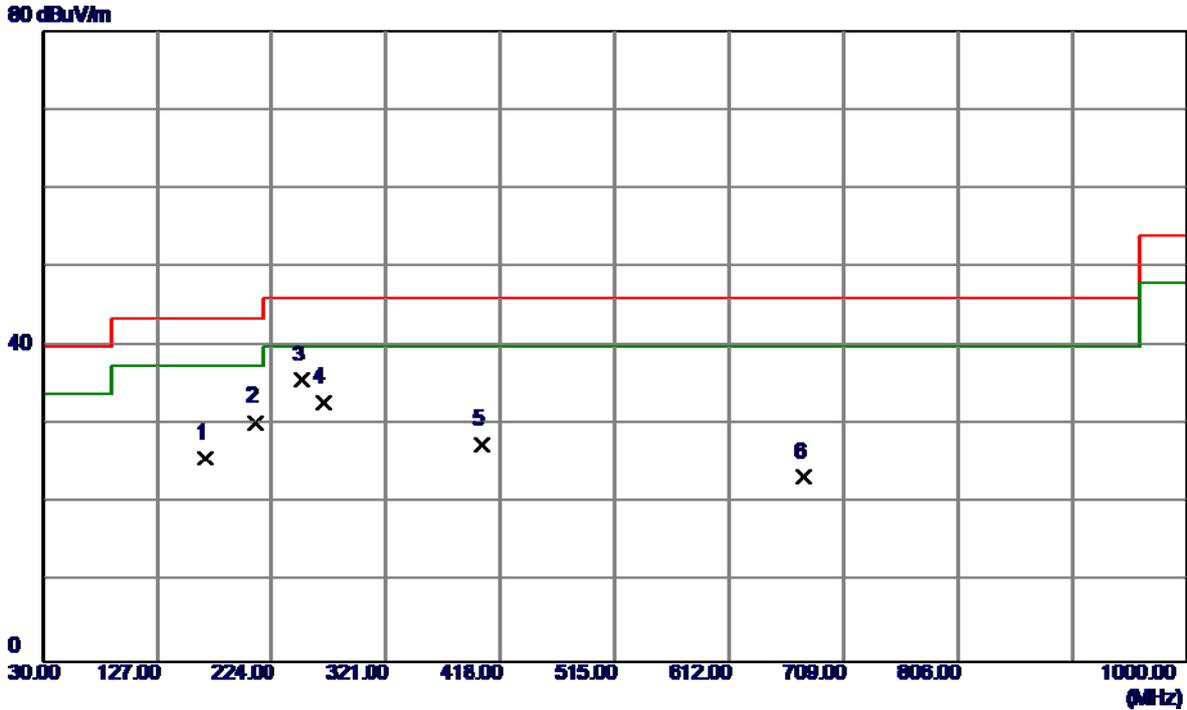

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	167.7400	38.70	-13.00	25.70	43.50	-17.80	Peak	
2	210.4200	45.70	-15.38	30.32	43.50	-13.18	Peak	
3	250.1900	49.67	-14.02	35.65	46.00	-10.35	Peak	
4	267.6500	46.20	-13.35	32.85	46.00	-13.15	Peak	
5	402.4800	37.07	-9.48	27.59	46.00	-18.41	Peak	
6	676.0200	28.33	-5.04	23.29	46.00	-22.71	Peak	

Test Mode: UNII-2C/TX A Mode 5580MHz(Adapter 1)


Vertical

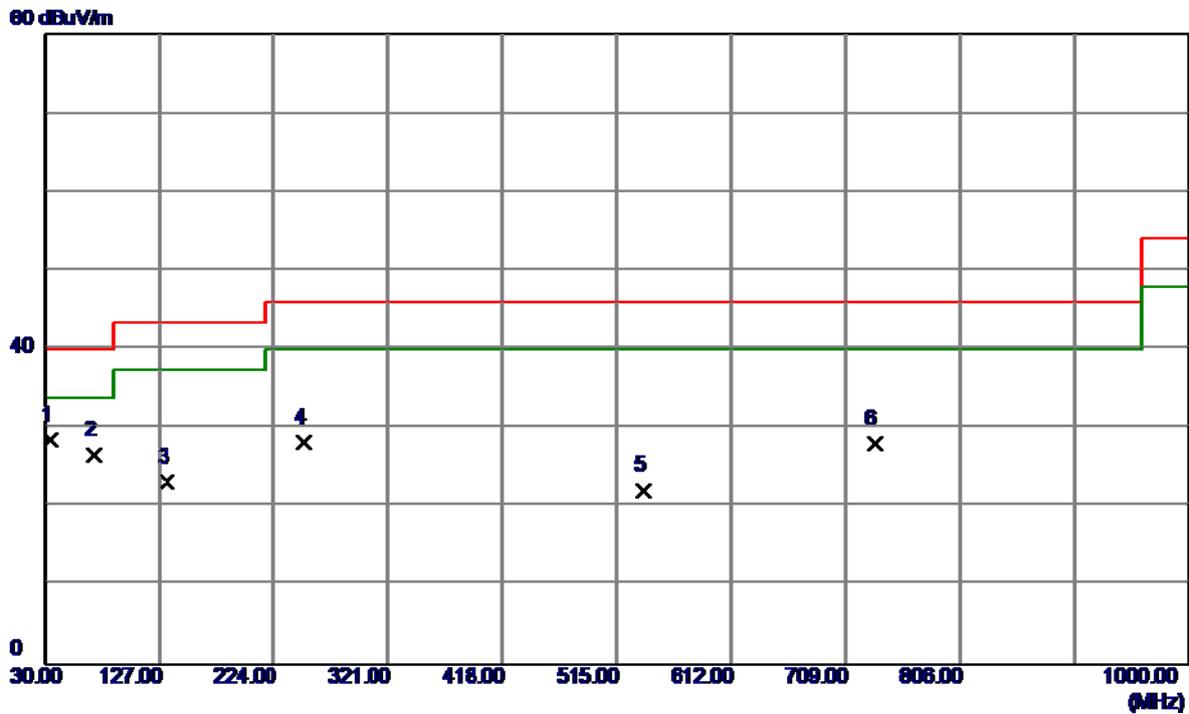

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	33.8800	43.39	-14.94	28.45	40.00	-11.55	Peak	
2	71.7100	42.87	-16.37	26.50	40.00	-13.50	Peak	
3	133.7899	36.22	-13.10	23.12	43.50	-20.38	Peak	
4	250.1900	42.20	-14.02	28.18	46.00	-17.82	Peak	
5	537.3100	30.70	-8.59	22.11	46.00	-23.89	Peak	
6	733.2500	32.69	-4.73	27.96	46.00	-18.04	Peak	

Test Mode: UNII-2C/TX A Mode 5580MHz(Adapter 1)


Horizontal

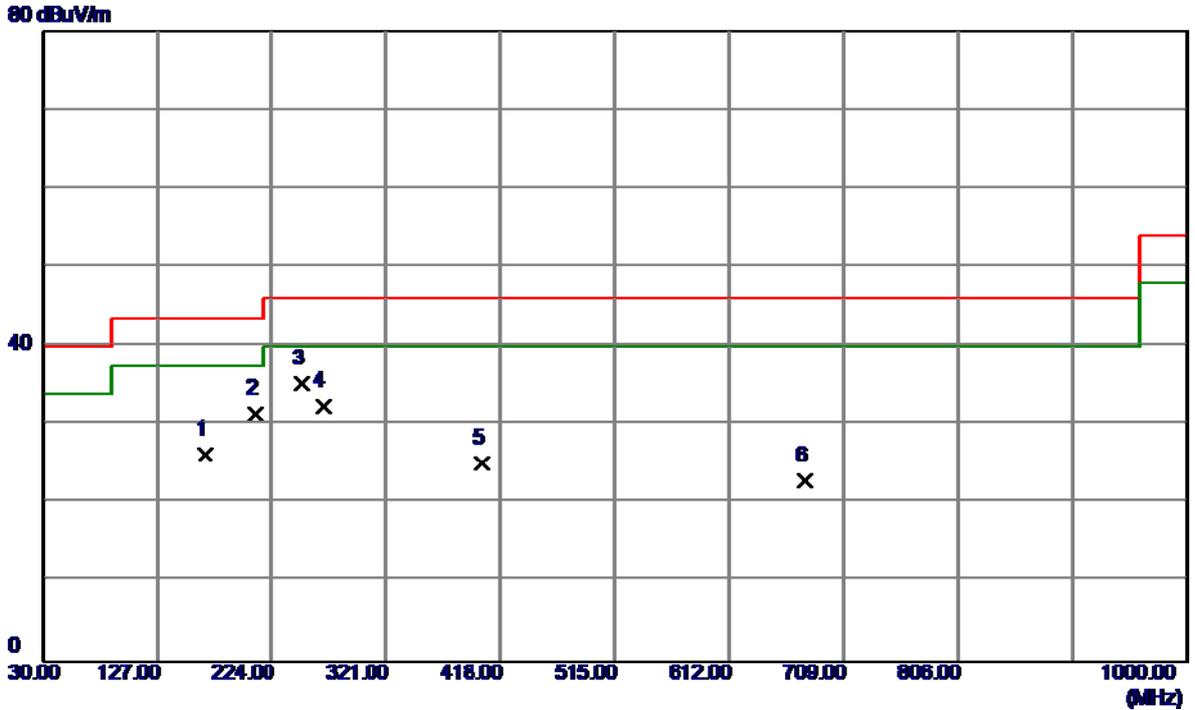

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	167.7400	39.20	-13.00	26.20	43.50	-17.30	Peak	
2	210.4200	46.70	-15.38	31.32	43.50	-12.18	Peak	
3	250.1900	49.17	-14.02	35.15	46.00	-10.85	Peak	
4	267.6500	45.70	-13.35	32.35	46.00	-13.65	Peak	
5	402.4800	34.57	-9.48	25.09	46.00	-20.91	Peak	
6	676.9900	27.99	-5.03	22.96	46.00	-23.04	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter 1)


Vertical

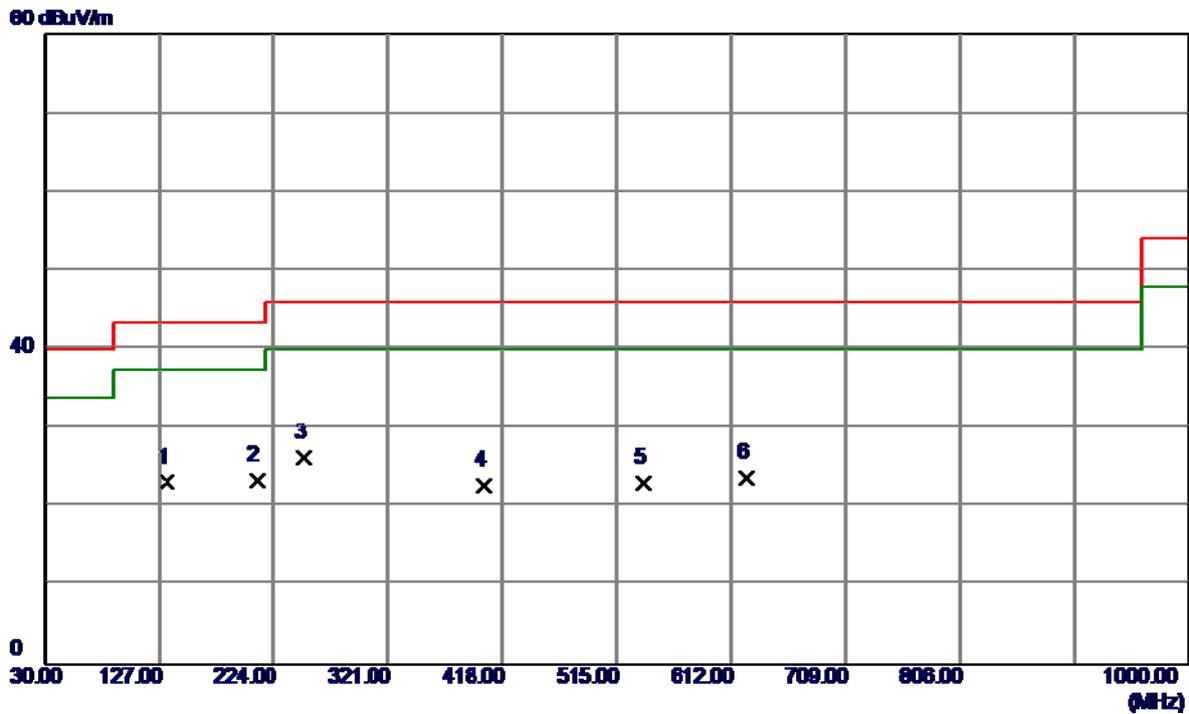

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	133.7899	36.22	-13.10	23.12	43.50	-20.38	Peak	
2	209.4500	38.68	-15.38	23.30	43.50	-20.20	Peak	
3	250.1900	40.20	-14.02	26.18	46.00	-19.82	Peak	
4	402.4800	32.21	-9.48	22.73	46.00	-23.27	Peak	
5	537.3100	31.70	-8.59	23.11	46.00	-22.89	Peak	
6	624.6100	30.17	-6.55	23.62	46.00	-22.38	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter 1)


Horizontal

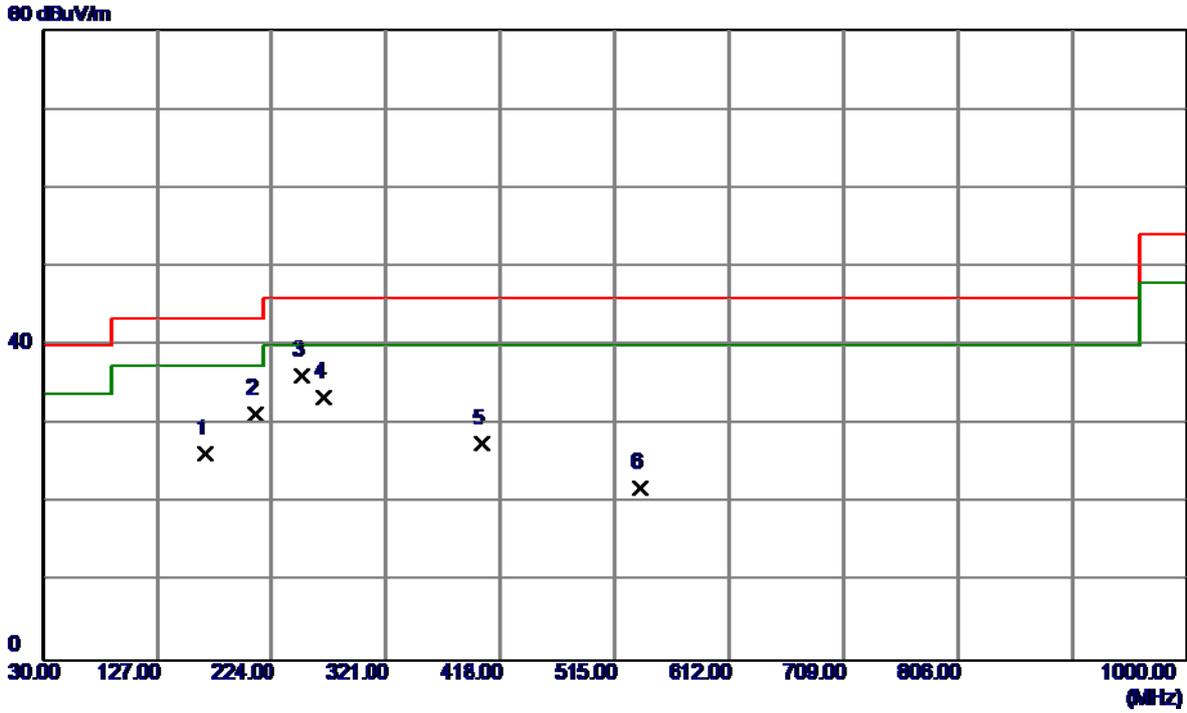

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	167.7400	39.20	-13.00	26.20	43.50	-17.30	Peak	
2	210.4200	46.70	-15.38	31.32	43.50	-12.18	Peak	
3	250.1900	50.17	-14.02	36.15	46.00	-9.85	Peak	
4	268.6200	46.77	-13.29	33.48	46.00	-12.52	Peak	
5	402.4800	37.07	-9.48	27.59	46.00	-18.41	Peak	
6	536.3400	30.60	-8.64	21.96	46.00	-24.04	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter 1)


Vertical

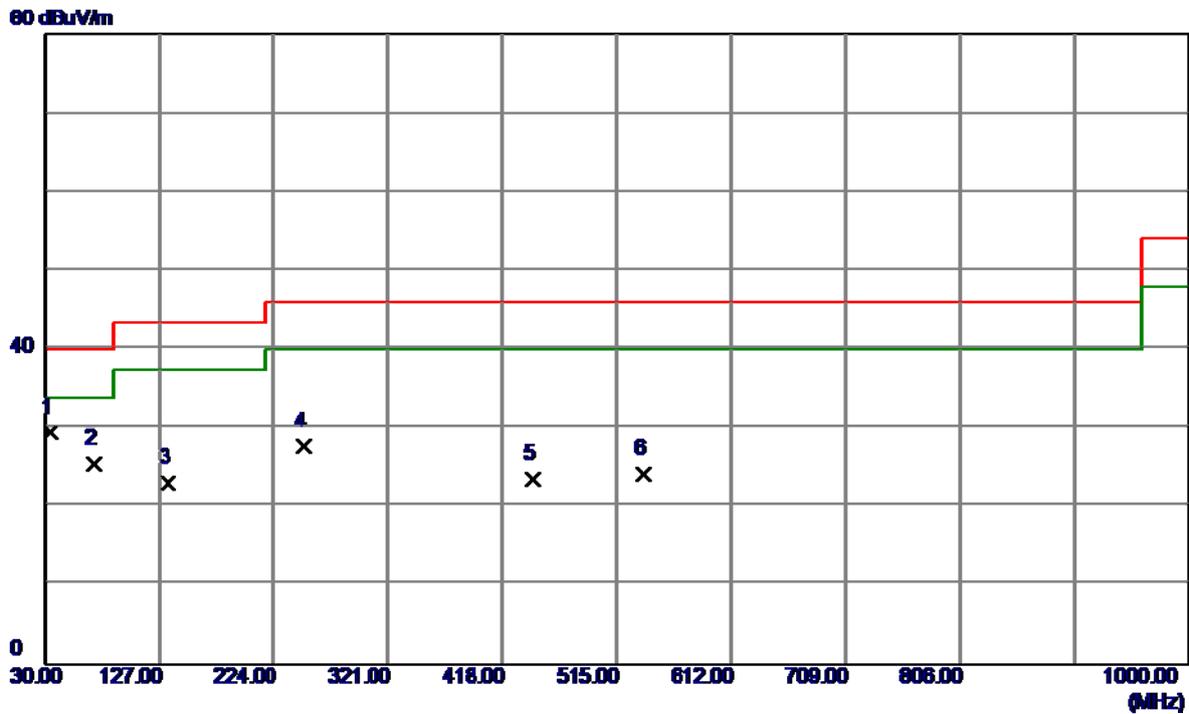

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	33.8800	44.39	-14.94	29.45	40.00	-10.55	Peak	
2	71.7100	41.87	-16.37	25.50	40.00	-14.50	Peak	
3	134.7600	36.13	-13.11	23.02	43.50	-20.48	Peak	
4	250.1900	41.70	-14.02	27.68	46.00	-18.32	Peak	
5	444.1900	32.22	-8.73	23.49	46.00	-22.51	Peak	
6	537.3100	32.70	-8.59	24.11	46.00	-21.89	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter 1)


Horizontal

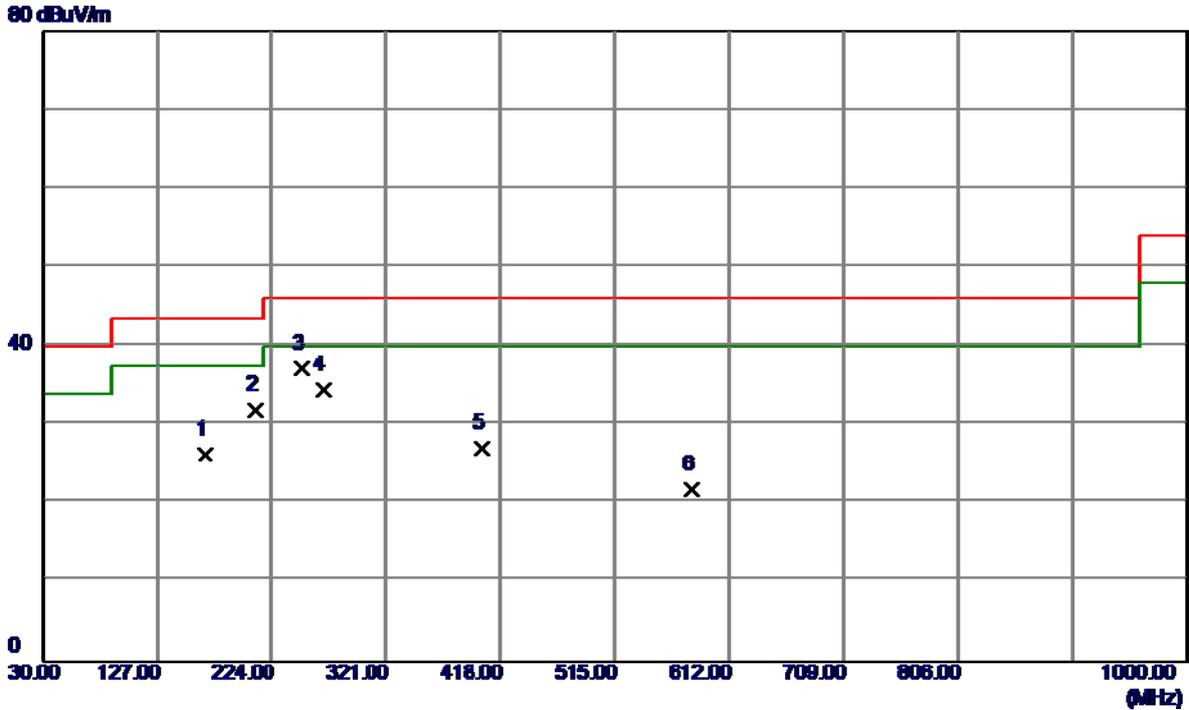

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	167.7400	39.20	-13.00	26.20	43.50	-17.30	Peak	
2	210.4200	47.20	-15.38	31.82	43.50	-11.68	Peak	
3	250.1900	51.17	-14.02	37.15	46.00	-8.85	Peak	
4	267.6500	47.70	-13.35	34.35	46.00	-11.65	Peak	
5	402.4800	36.57	-9.48	27.09	46.00	-18.91	Peak	
6	580.9600	29.65	-7.92	21.73	46.00	-24.27	Peak	

Test Mode: UNII-3/TX A Mode 5785MHz(Adapter 1)


Vertical

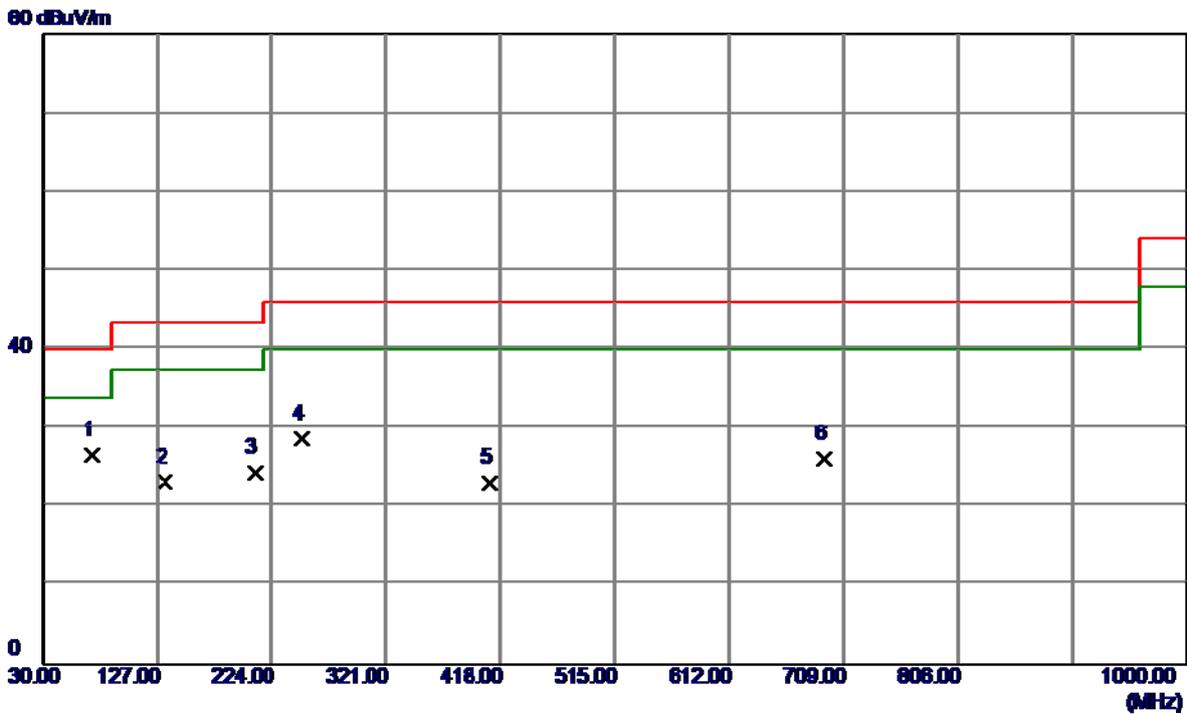

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	71.7100	42.87	-16.37	26.50	40.00	-13.50	Peak	
2	133.7899	36.22	-13.10	23.12	43.50	-20.38	Peak	
3	209.4500	39.68	-15.38	24.30	43.50	-19.20	Peak	
4	250.1900	42.70	-14.02	28.68	46.00	-17.32	Peak	
5	409.2700	32.45	-9.36	23.09	46.00	-22.91	Peak	
6	692.5100	30.99	-4.96	26.03	46.00	-19.97	Peak	

Test Mode: UNII-3/TX A Mode 5785MHz(Adapter 1)


Horizontal

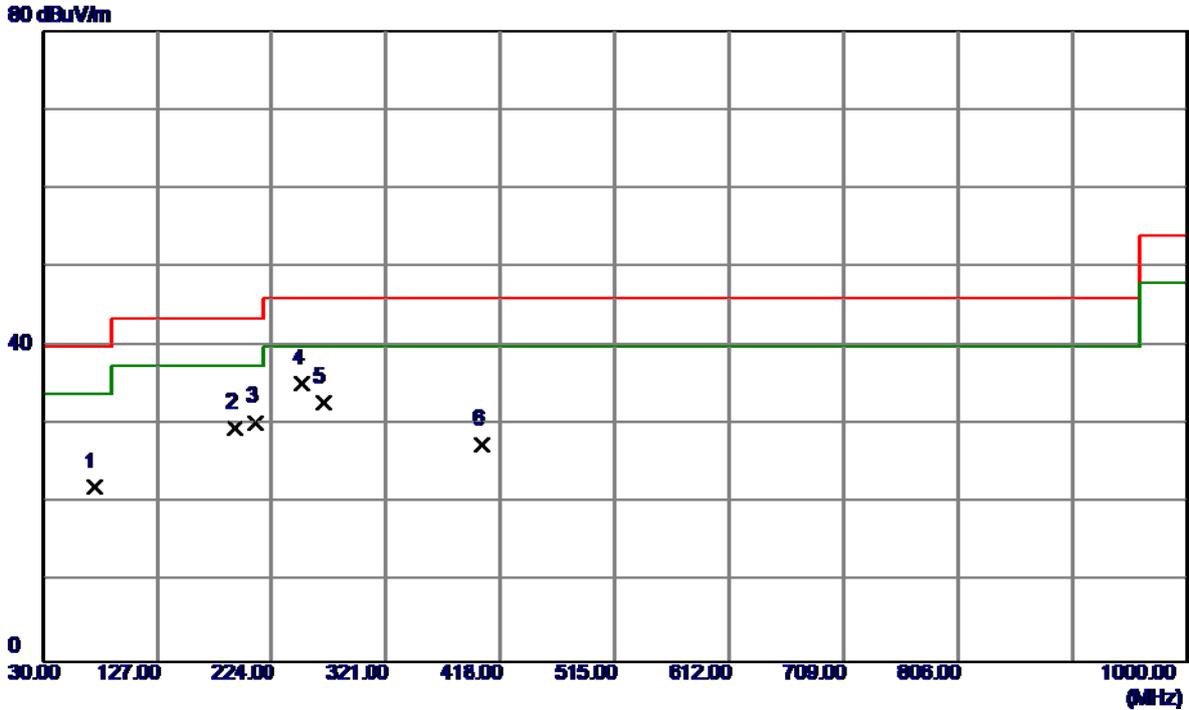

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	73.6500	38.66	-16.51	22.15	40.00	-17.85	Peak	
2	192.9600	44.15	-14.54	29.61	43.50	-13.89	Peak	
3	210.4200	45.70	-15.38	30.32	43.50	-13.18	Peak	
4	250.1900	49.17	-14.02	35.15	46.00	-10.85	Peak	
5	267.6500	46.20	-13.35	32.85	46.00	-13.15	Peak	
6	402.4800	37.07	-9.48	27.59	46.00	-18.41	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter 1)


Vertical

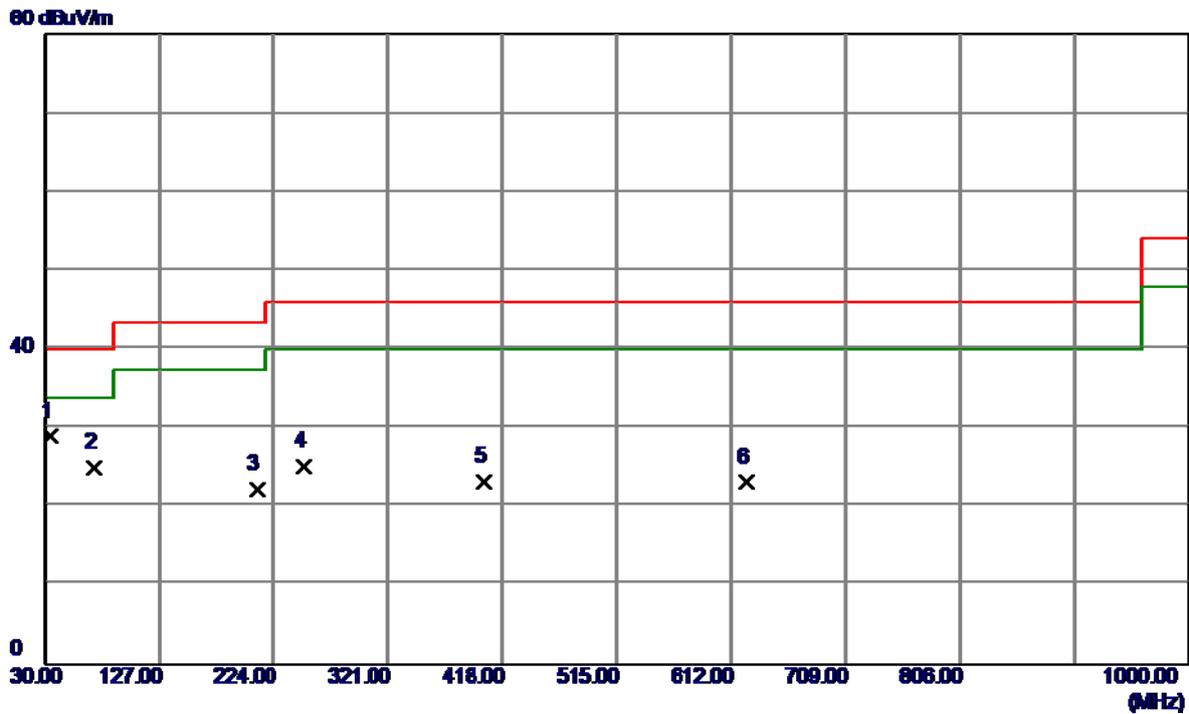

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	33.8800	43.89	-14.94	28.95	40.00	-11.05	Peak	
2	71.7100	41.37	-16.37	25.00	40.00	-15.00	Peak	
3	209.4500	37.68	-15.38	22.30	43.50	-21.20	Peak	
4	250.1900	39.20	-14.02	25.18	46.00	-20.82	Peak	
5	402.4800	32.71	-9.48	23.23	46.00	-22.77	Peak	
6	624.6100	29.67	-6.55	23.12	46.00	-22.88	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter 1)

Horizontal

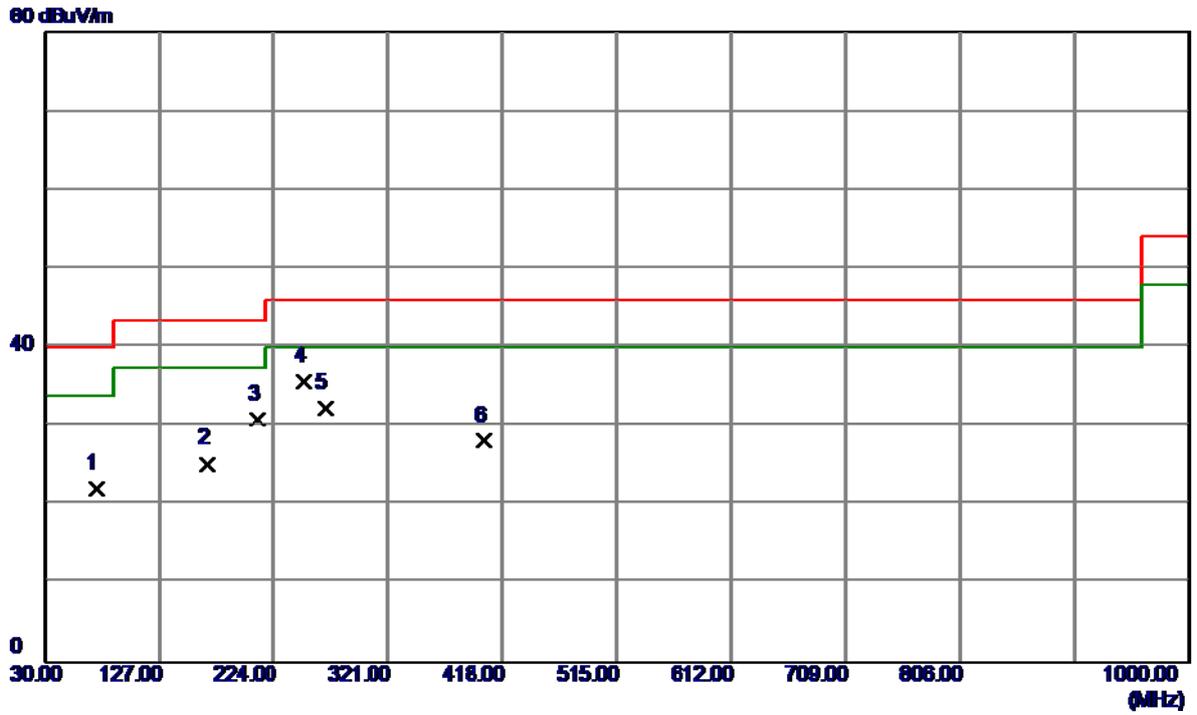


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	73.6500	38.66	-16.51	22.15	40.00	-17.85	Peak	
2	167.7400	38.20	-13.00	25.20	43.50	-18.30	Peak	
3	210.4200	46.20	-15.38	30.82	43.50	-12.68	Peak	
4	250.1900	49.67	-14.02	35.65	46.00	-10.35	Peak	
5	267.6500	45.70	-13.35	32.35	46.00	-13.65	Peak	
6	402.4800	37.57	-9.48	28.09	46.00	-17.91	Peak	

ATTACHMENTD -RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

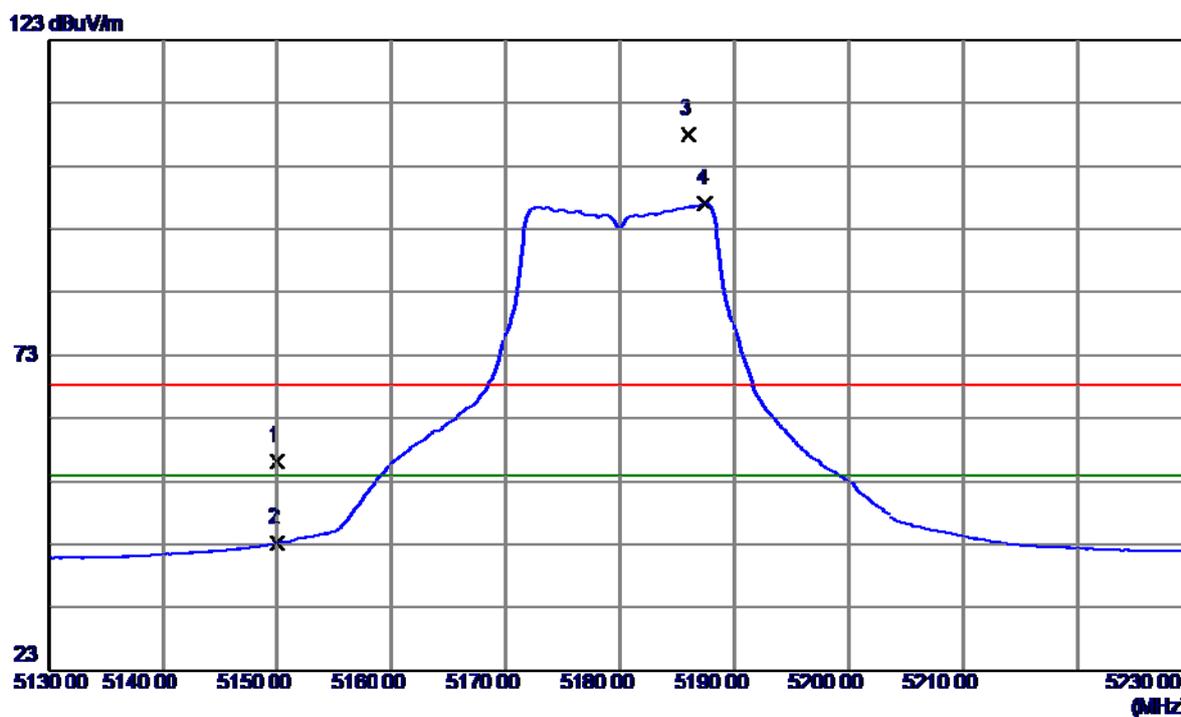

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	15.96	40.22	56.18	68.30	-12.12	Peak	
2	5150.0000	2.98	40.22	43.20	54.00	-10.80	AVG	
3	5186.0000	67.72	40.29	108.01	68.30	39.71	Peak	no limit
4	5187.5000	56.79	40.30	97.09	54.00	43.09	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

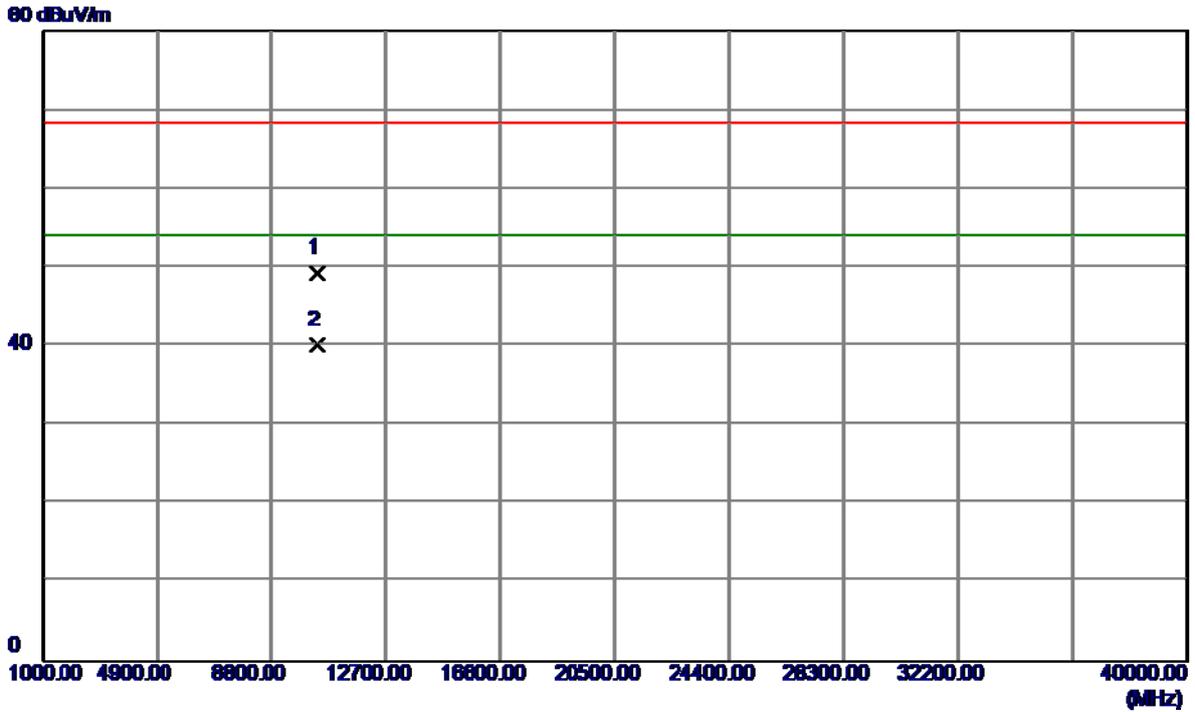

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.2800	35.37	13.86	49.23	68.30	-19.07	Peak	
2	10360.2800	26.29	13.86	40.15	54.00	-13.85	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

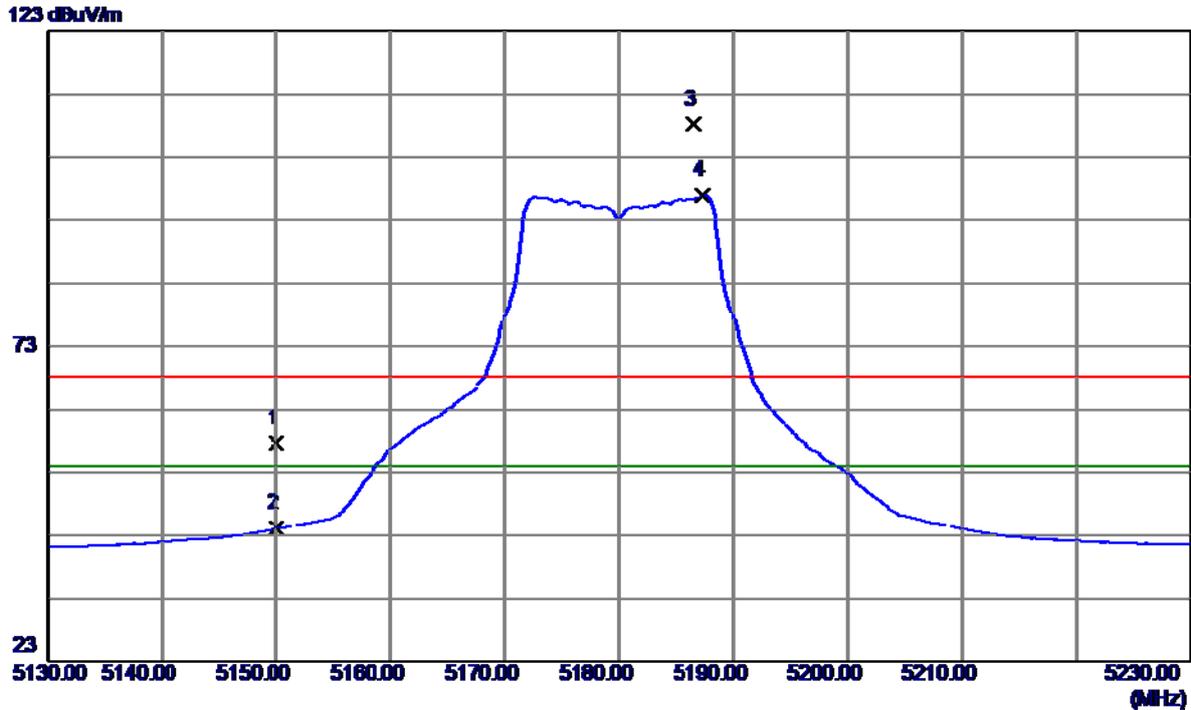

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	17.39	40.22	57.61	68.30	-10.69	Peak	
2	5150.0000	3.94	40.22	44.16	54.00	-9.84	AVG	
3	5186.6000	67.81	40.30	108.11	68.30	39.81	Peak	no limit
4	5187.3000	56.66	40.30	96.96	54.00	42.96	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

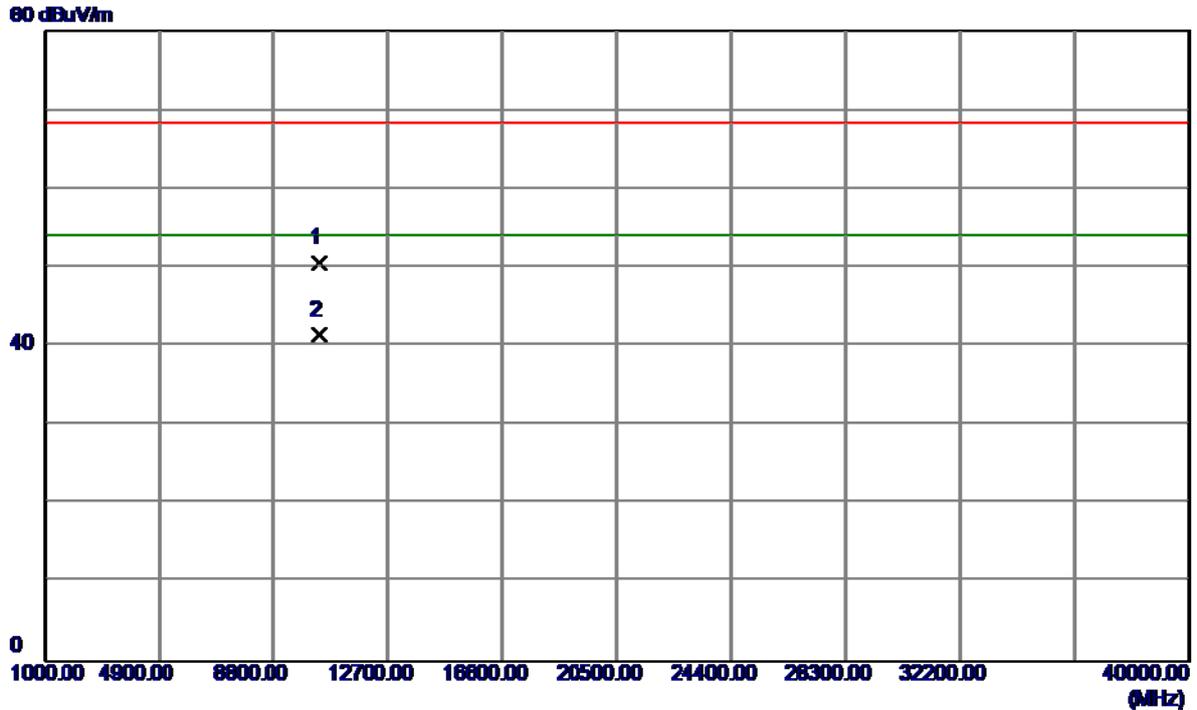

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.1800	36.72	13.86	50.58	68.30	-17.72	Peak	
2	10360.1800	27.51	13.86	41.37	54.00	-12.63	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

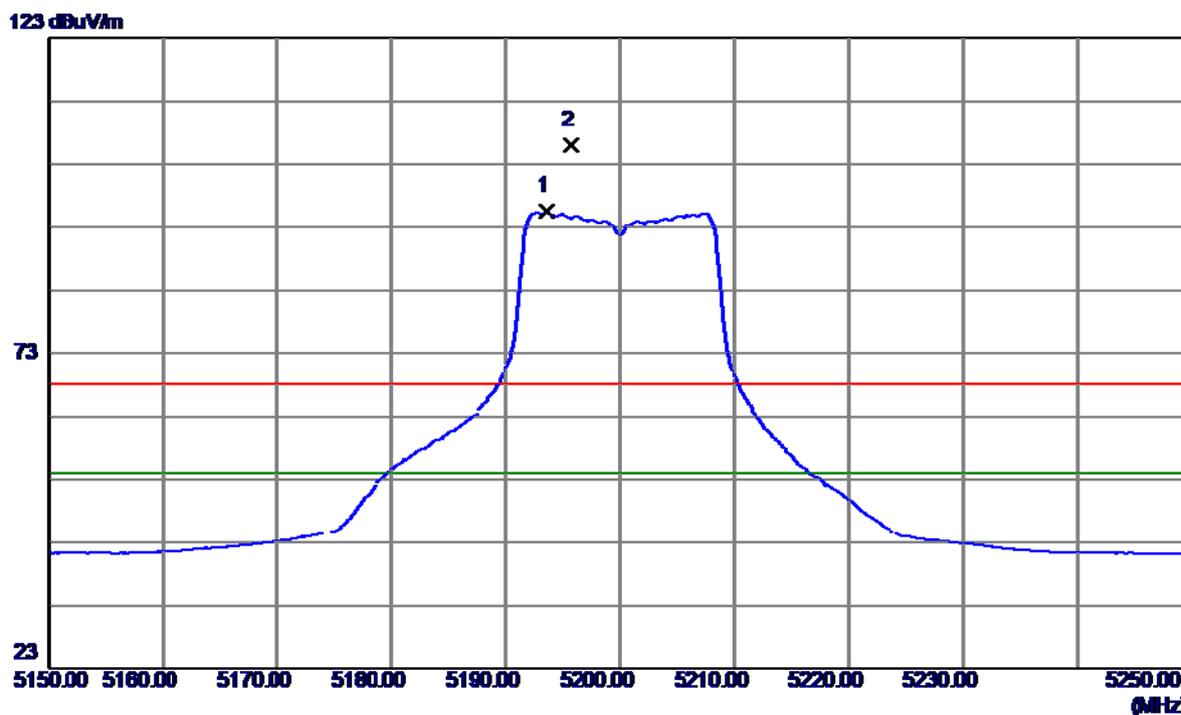

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5193.6000	55.23	40.31	95.54	54.00	41.54	AVG	no limit
2	5195.7000	65.60	40.31	105.91	68.30	37.61	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Vertical

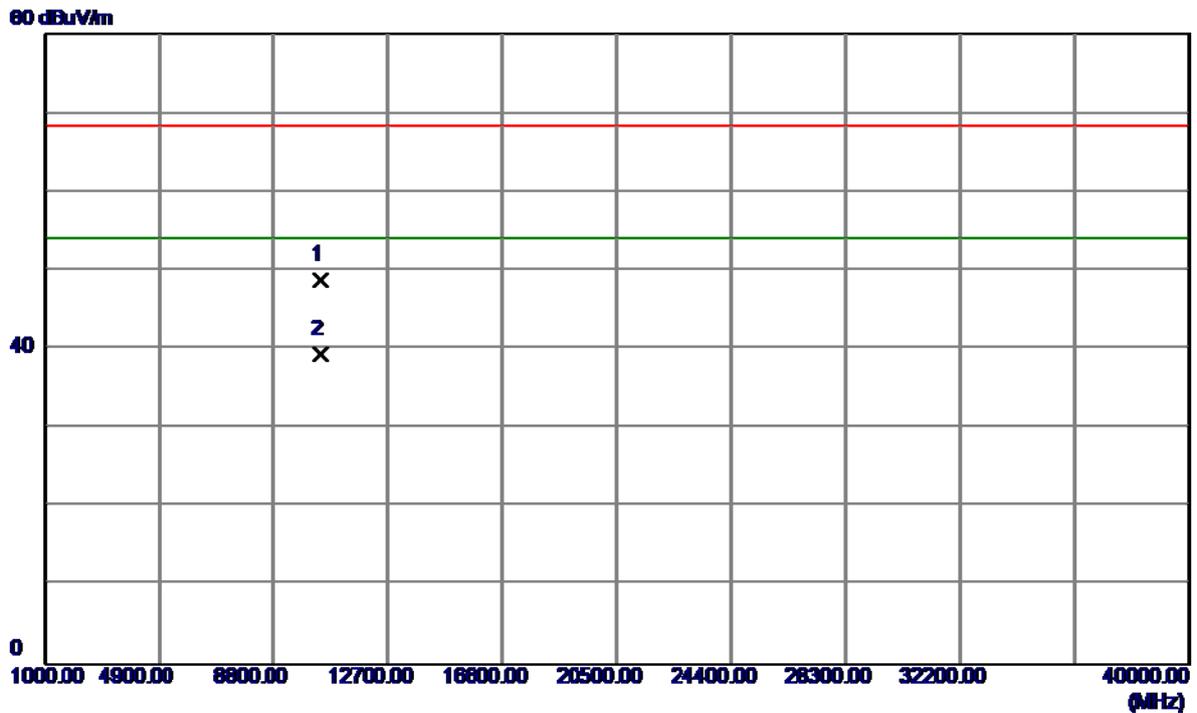

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.5199	34.96	13.80	48.76	68.30	-19.54	Peak	
2	10400.5199	25.54	13.80	39.34	54.00	-14.66	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz


Horizontal

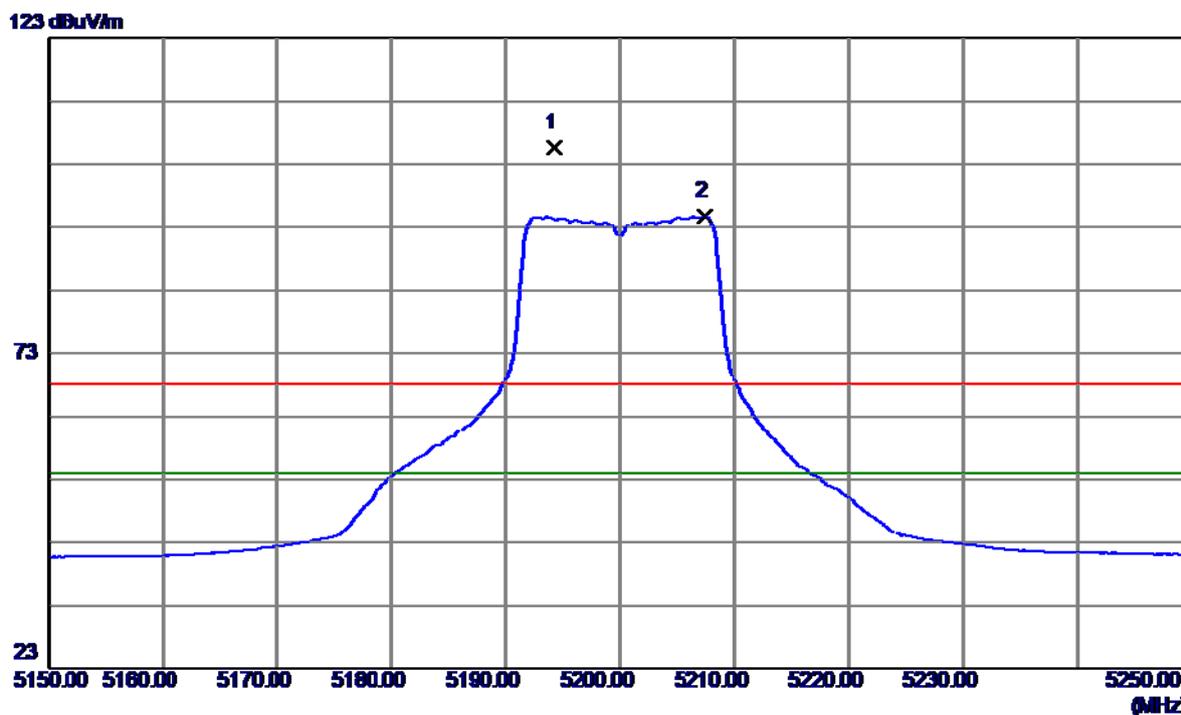

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5194.2000	65.36	40.31	105.67	68.30	37.37	Peak	no limit
2	5207.4000	54.52	40.34	94.86	54.00	40.86	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5200MHz

Horizontal

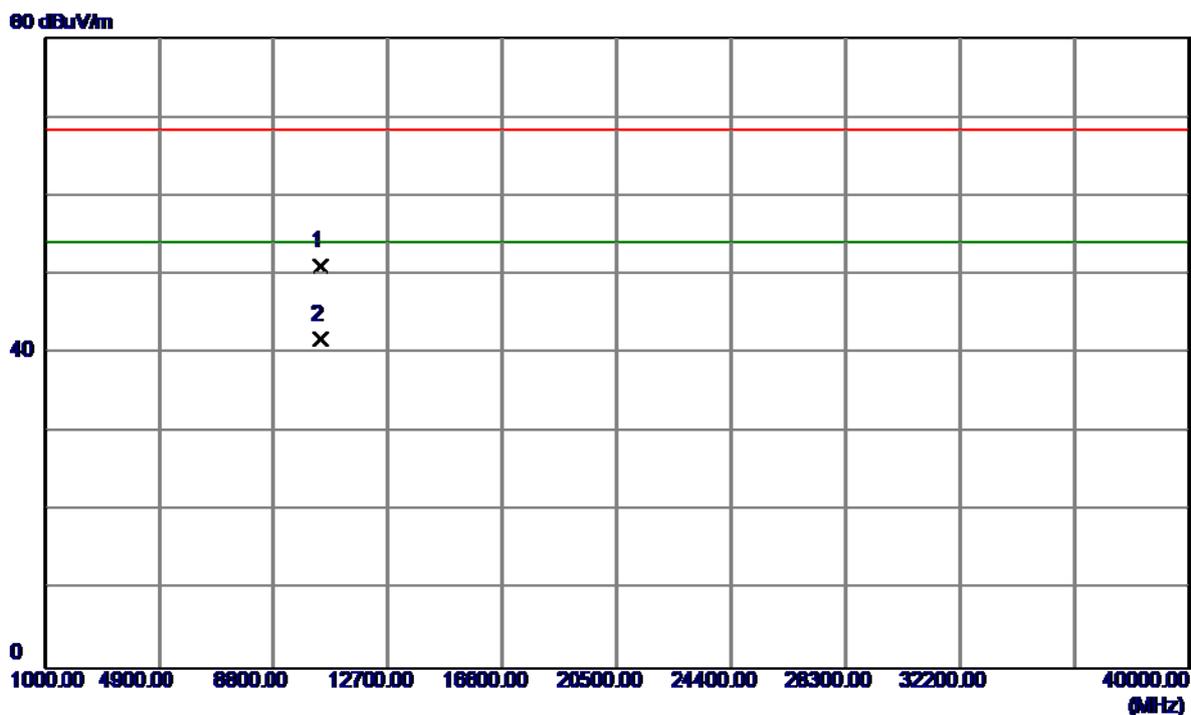


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.1800	37.23	13.80	51.03	68.30	-17.27	Peak	
2	10400.1800	27.97	13.80	41.77	54.00	-12.23	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical


123 dBuV/m

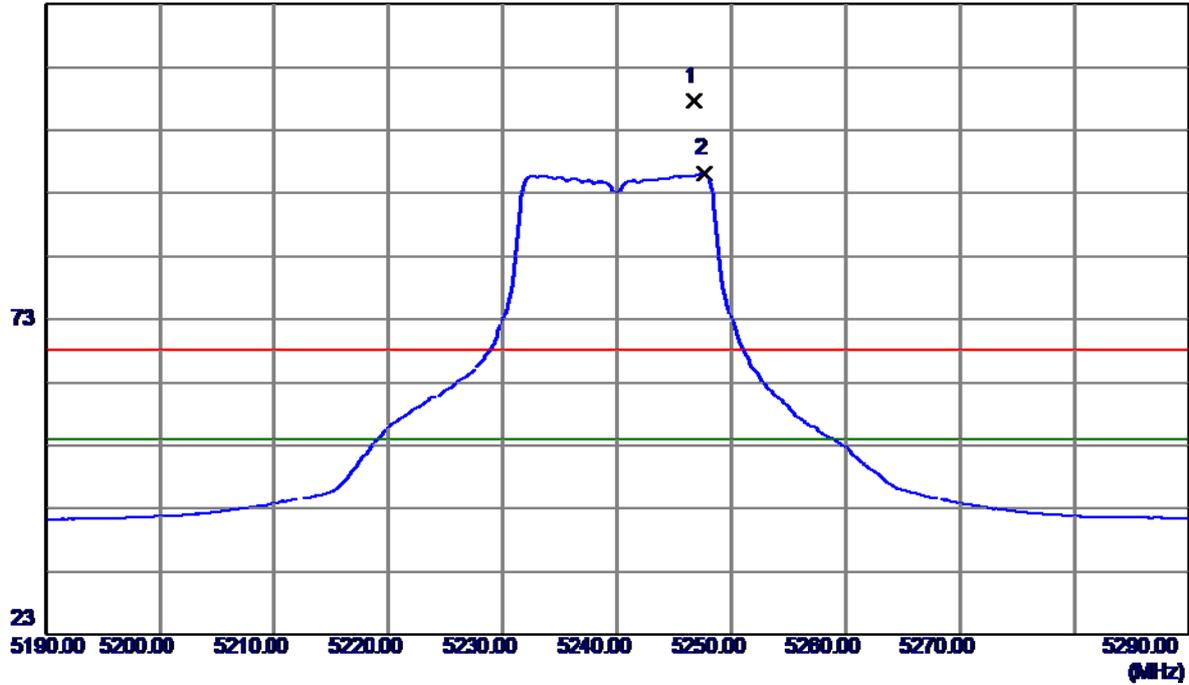

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5246.8000	67.25	40.42	107.67	68.30	39.37	Peak	no limit
2	5247.7000	55.82	40.43	96.25	54.00	42.25	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

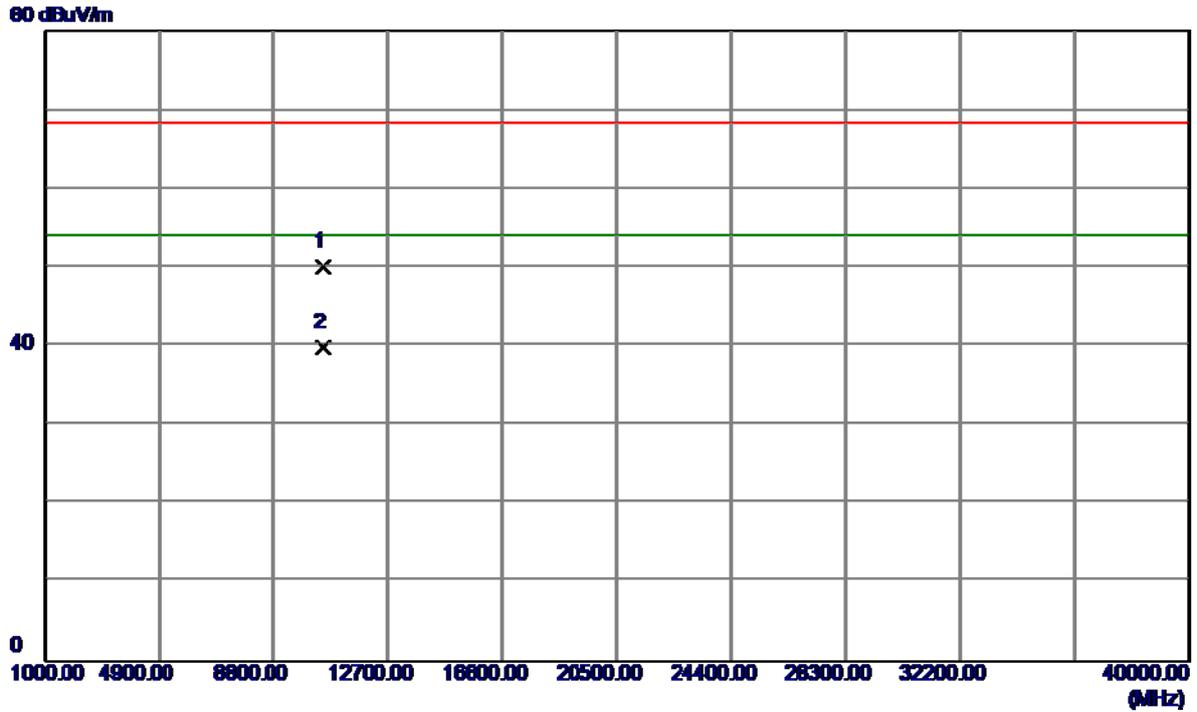

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.1500	36.45	13.69	50.14	68.30	-18.16	Peak	
2	10480.1500	26.18	13.69	39.87	54.00	-14.13	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

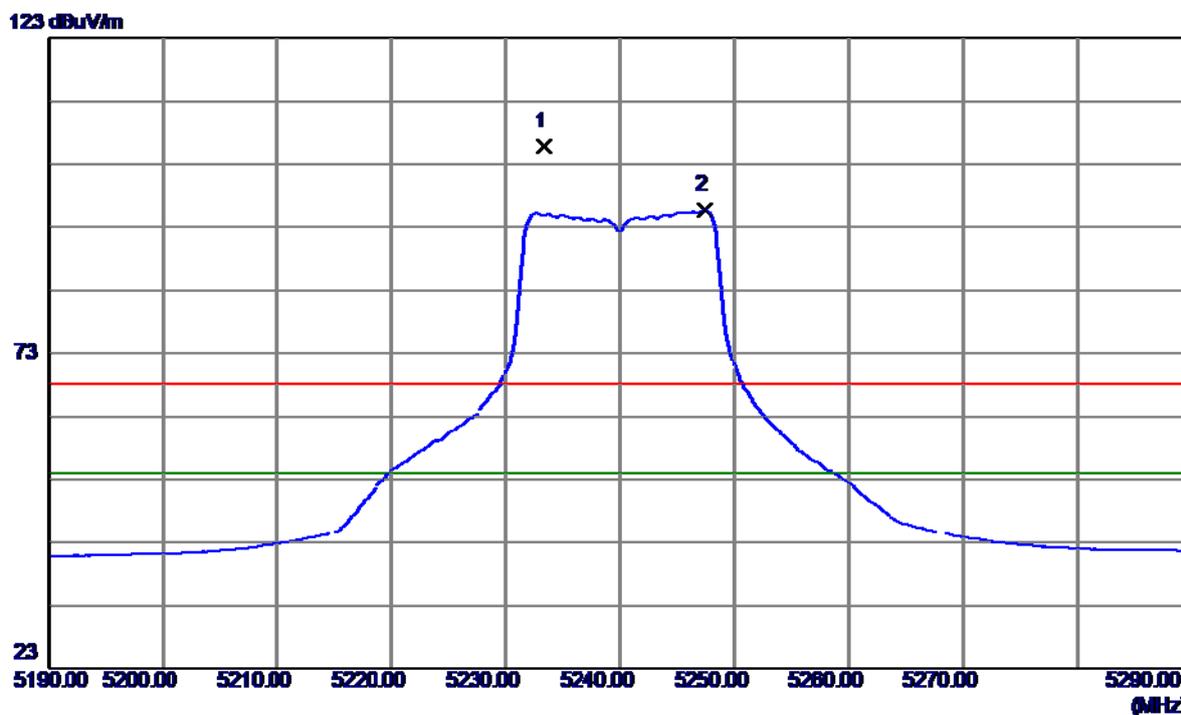

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5233.3000	65.41	40.39	105.80	68.30	37.50	Peak	no limit
2	5247.4000	55.39	40.42	95.81	54.00	41.81	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

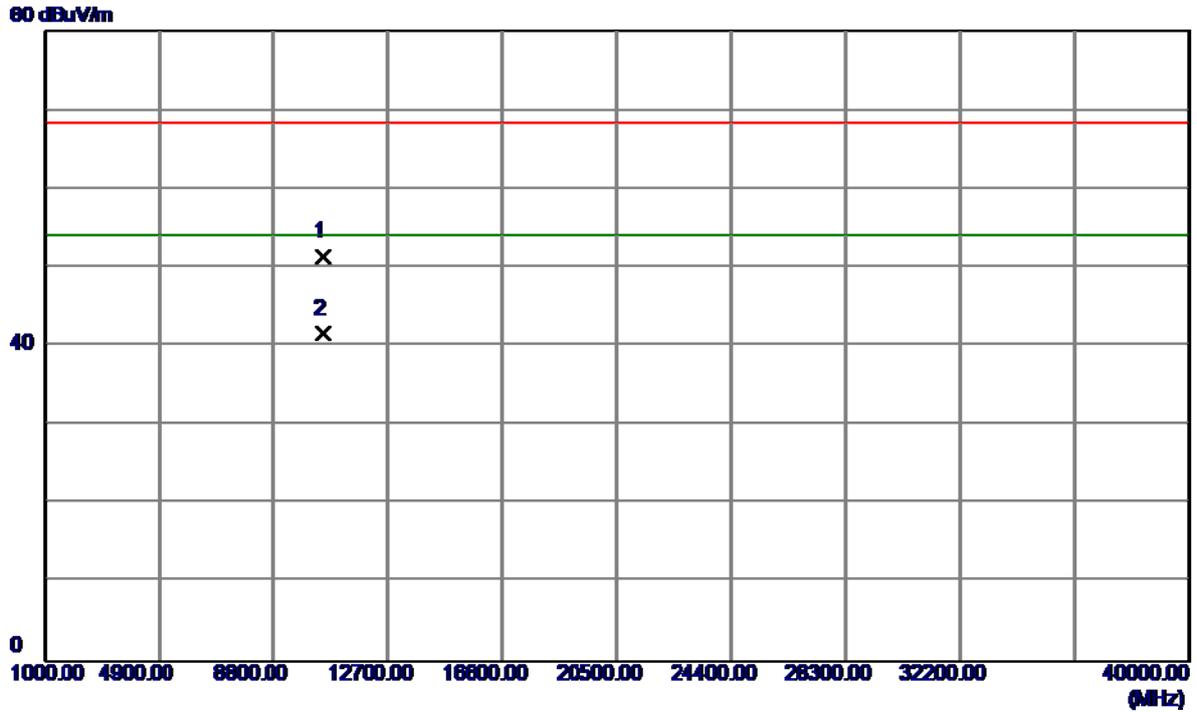


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10481.7500	37.64	13.69	51.33	68.30	-16.97	Peak	
2	10481.7500	27.89	13.69	41.58	54.00	-12.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical


123 dBuV/m

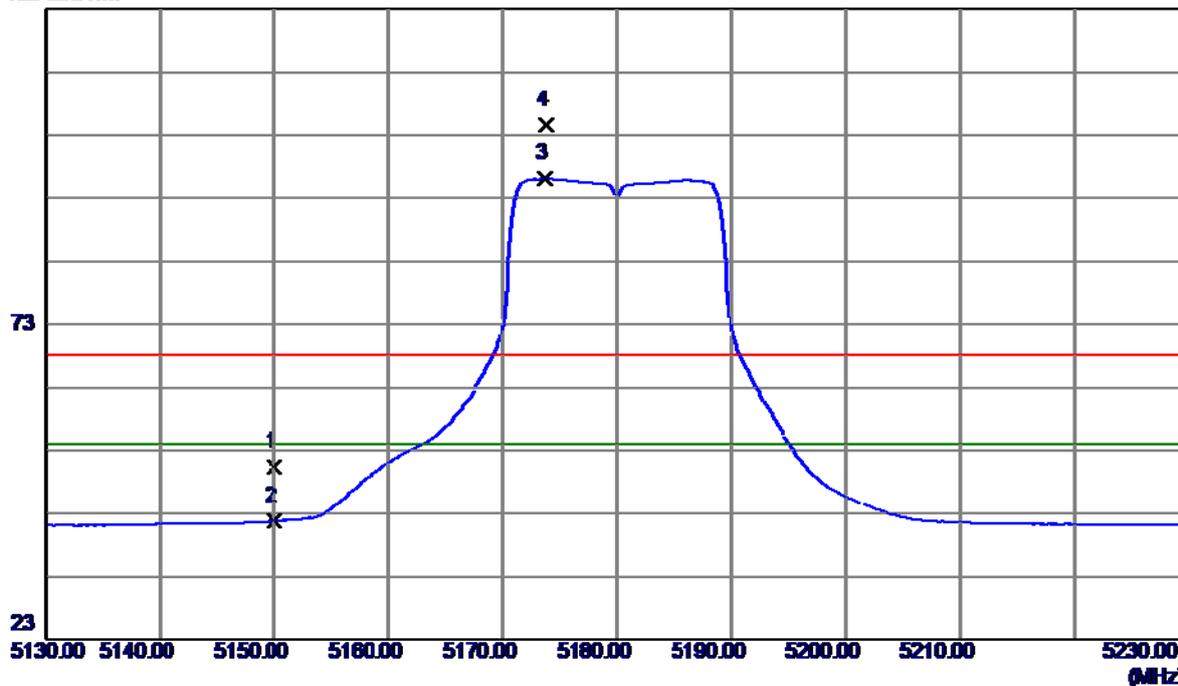

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	10.09	40.22	50.31	68.30	-17.99	Peak	
2	5150.0000	1.52	40.22	41.74	54.00	-12.26	AVG	
3	5173.7000	55.97	40.27	96.24	54.00	42.24	AVG	no limit
4	5173.8000	64.38	40.27	104.65	68.30	36.35	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

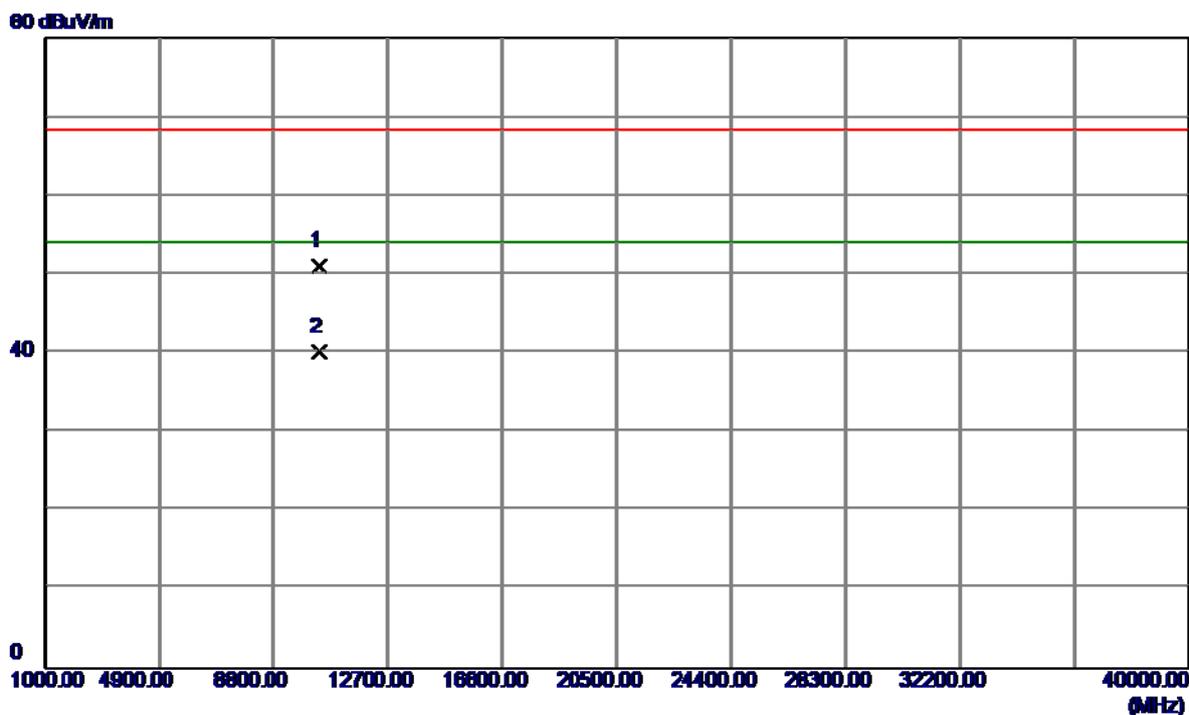

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.2200	37.11	13.86	50.97	68.30	-17.33	Peak	
2	10360.2200	26.27	13.86	40.13	54.00	-13.87	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

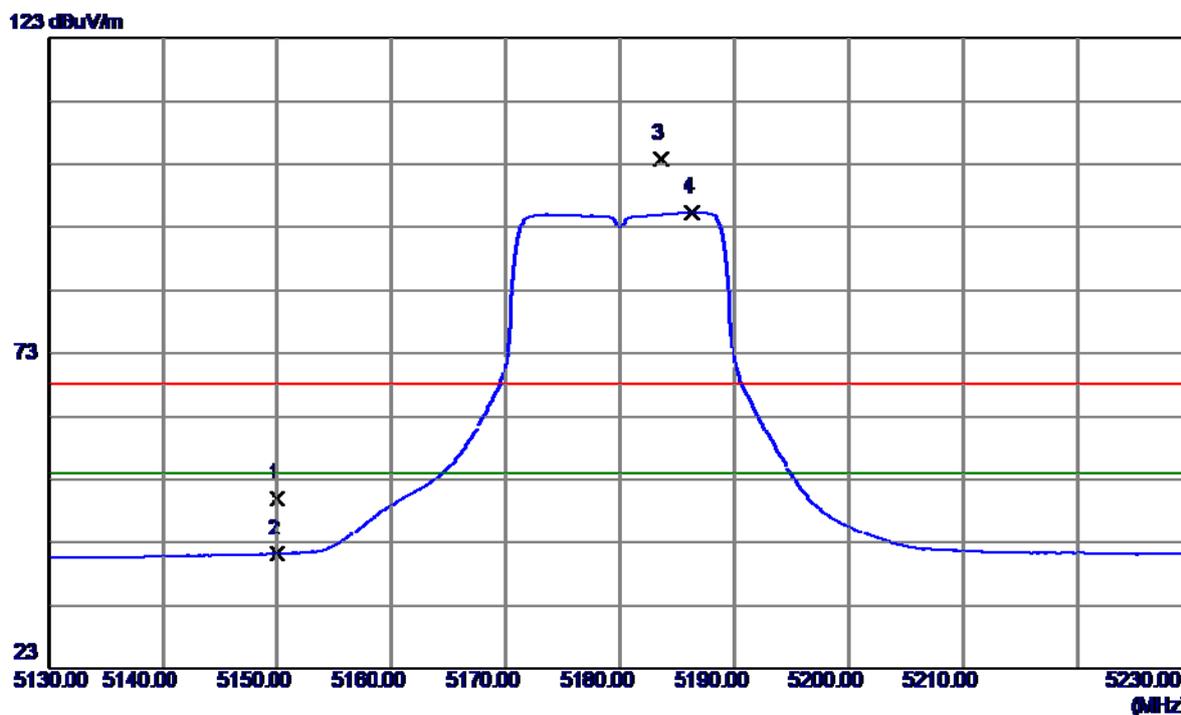

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	9.85	40.22	50.07	68.30	-18.23	Peak	
2	5150.0000	0.98	40.22	41.20	54.00	-12.80	AVG	
3	5183.6000	63.52	40.29	103.81	68.30	35.51	Peak	no limit
4	5186.3000	55.15	40.29	95.44	54.00	41.44	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

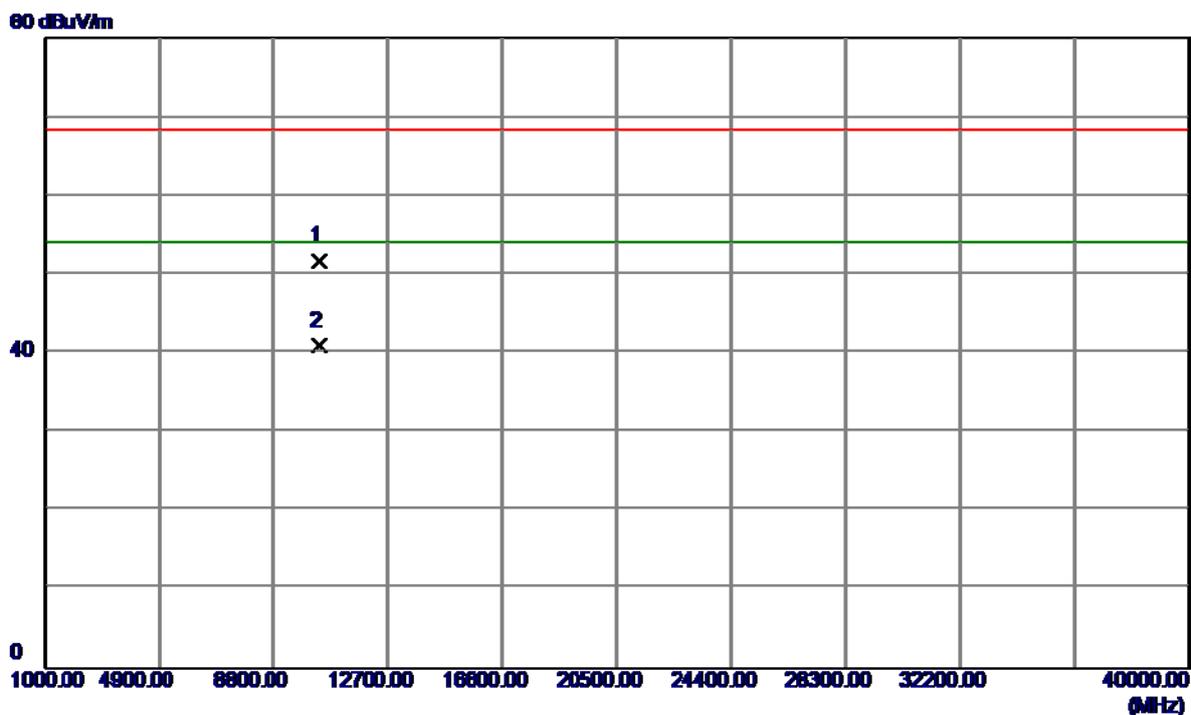


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.1200	37.85	13.86	51.71	68.30	-16.59	Peak	
2	10360.1200	27.17	13.86	41.03	54.00	-12.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz

Vertical


123 dBuV/m

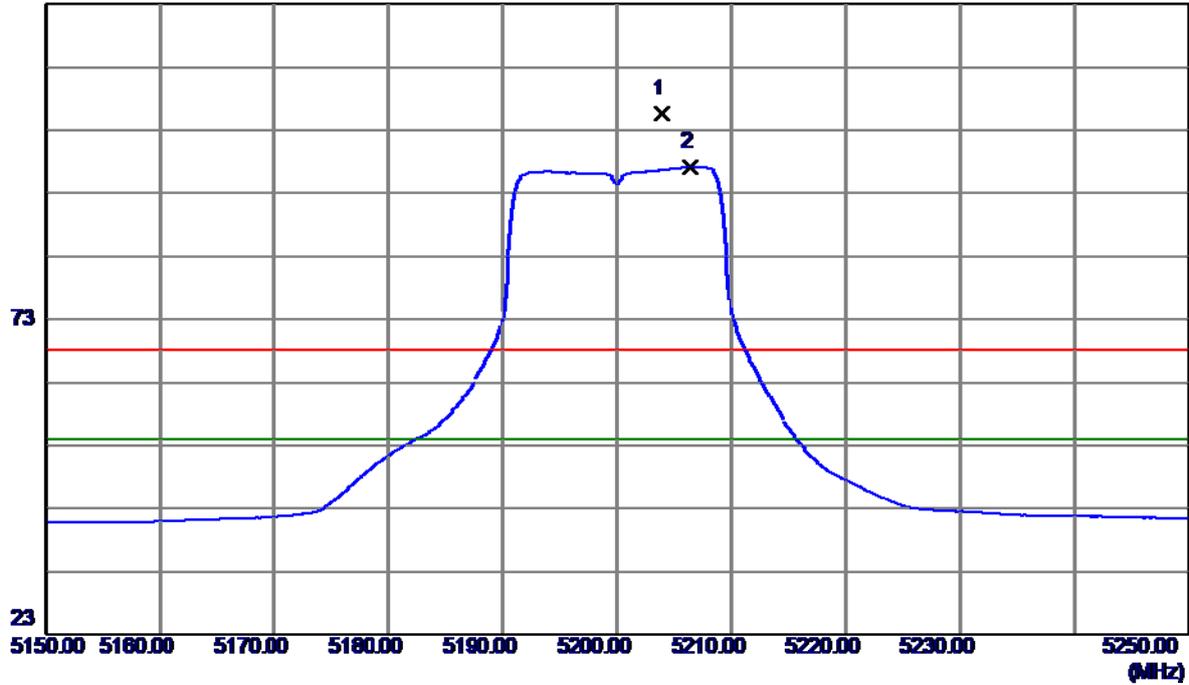

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5203.9000	65.23	40.33	105.56	68.30	37.26	Peak	no limit
2	5206.4000	56.88	40.34	97.22	54.00	43.22	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Vertical

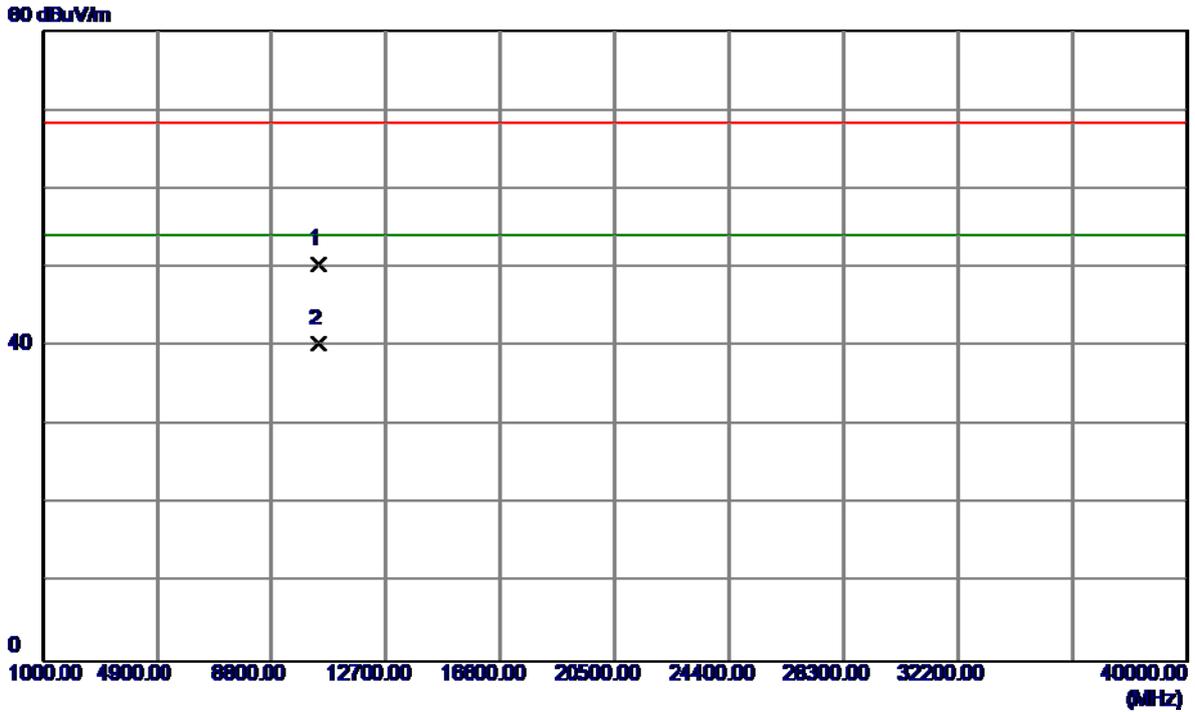

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.2800	36.59	13.80	50.39	68.30	-17.91	Peak	
2	10400.2800	26.49	13.80	40.29	54.00	-13.71	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

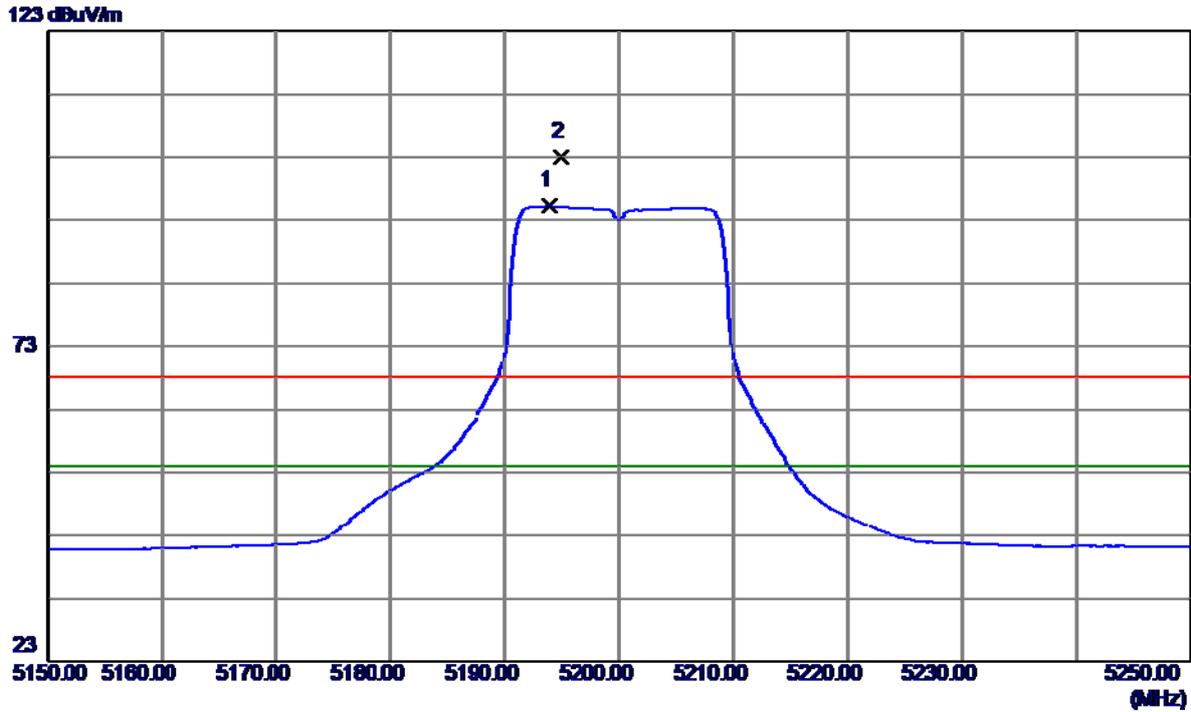

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5193.9000	55.03	40.31	95.34	54.00	41.34	AVG	no limit
2	5194.9000	62.66	40.31	102.97	68.30	34.67	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5200MHz


Horizontal

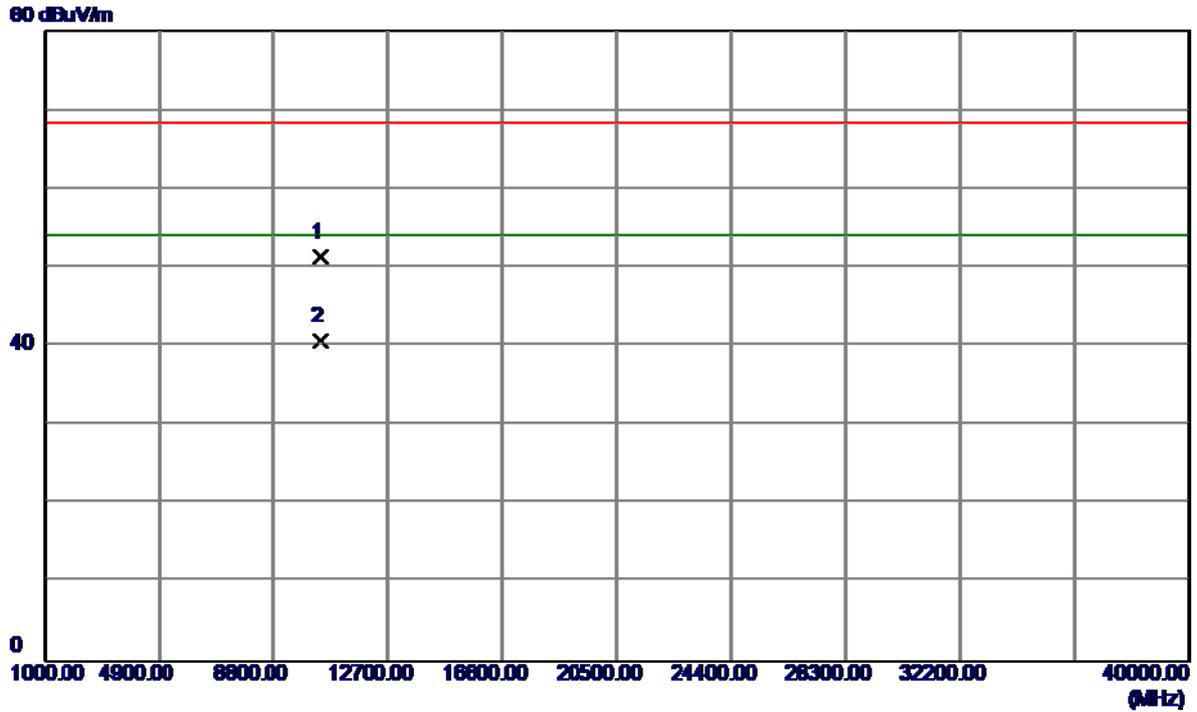

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.3099	37.48	13.80	51.28	68.30	-17.02	Peak	
2	10400.3099	26.81	13.80	40.61	54.00	-13.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

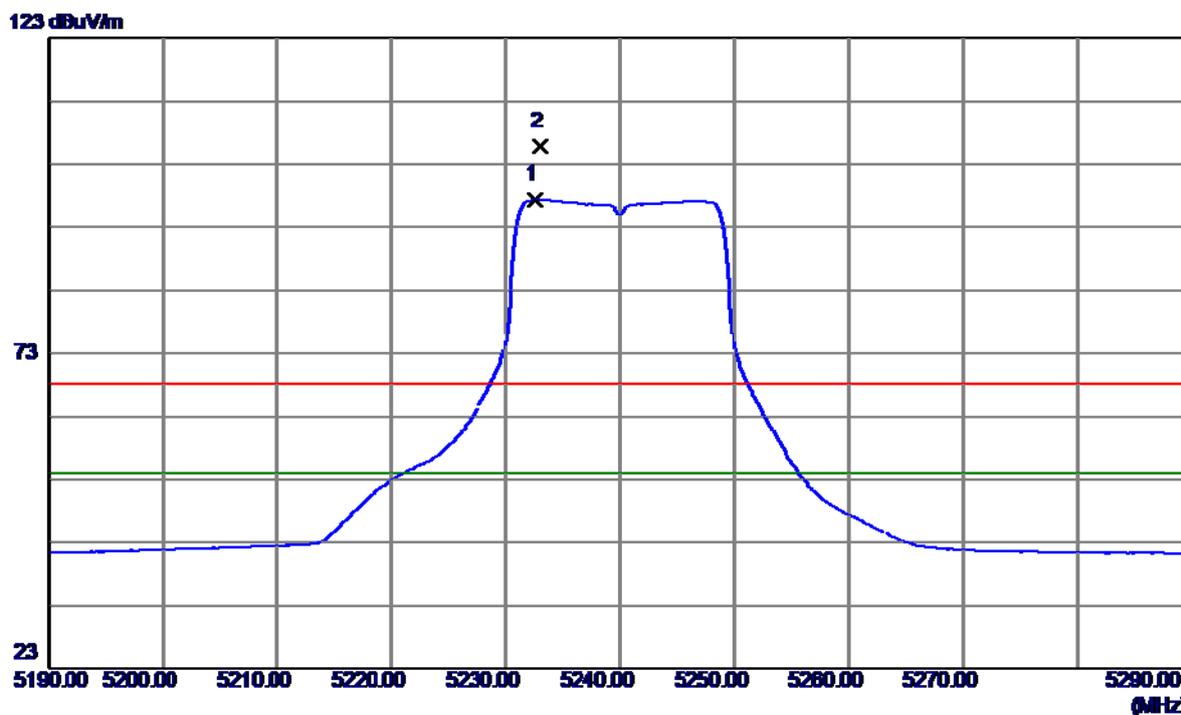

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5232.6000	57.04	40.39	97.43	54.00	43.43	AVG	no limit
2	5233.0000	65.33	40.39	105.72	68.30	37.42	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

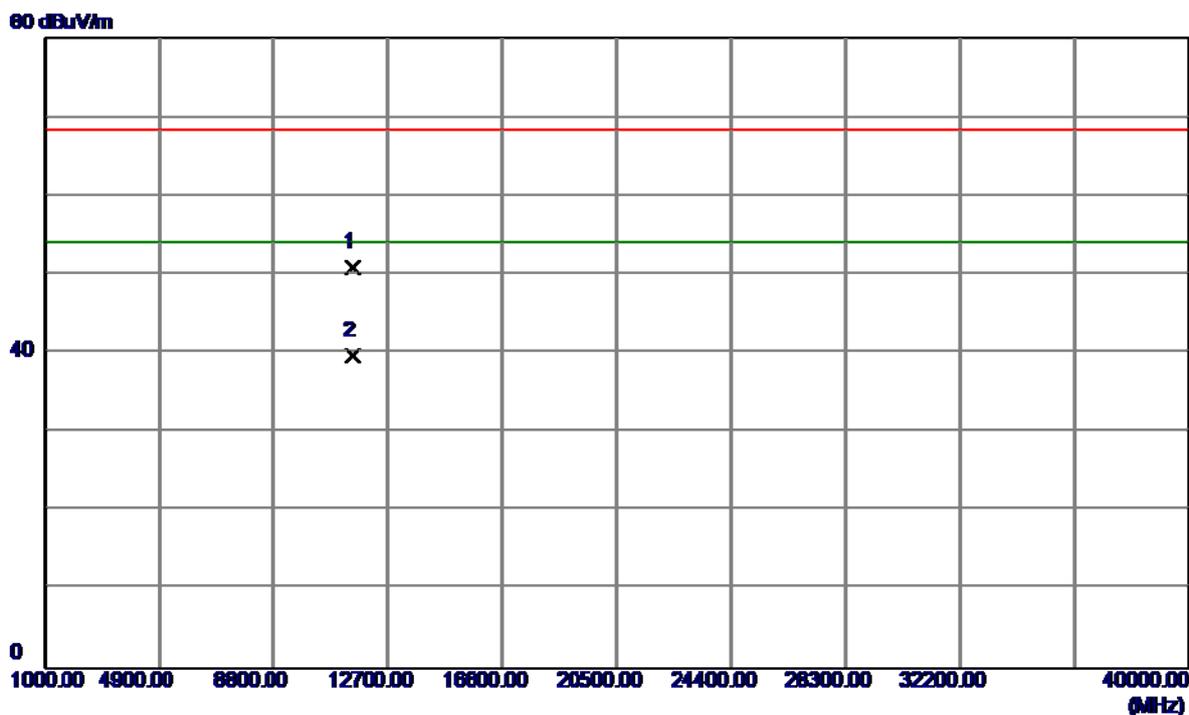

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11481.6300	33.97	16.89	50.86	68.30	-17.44	Peak	
2	11481.6300	22.86	16.89	39.75	54.00	-14.25	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

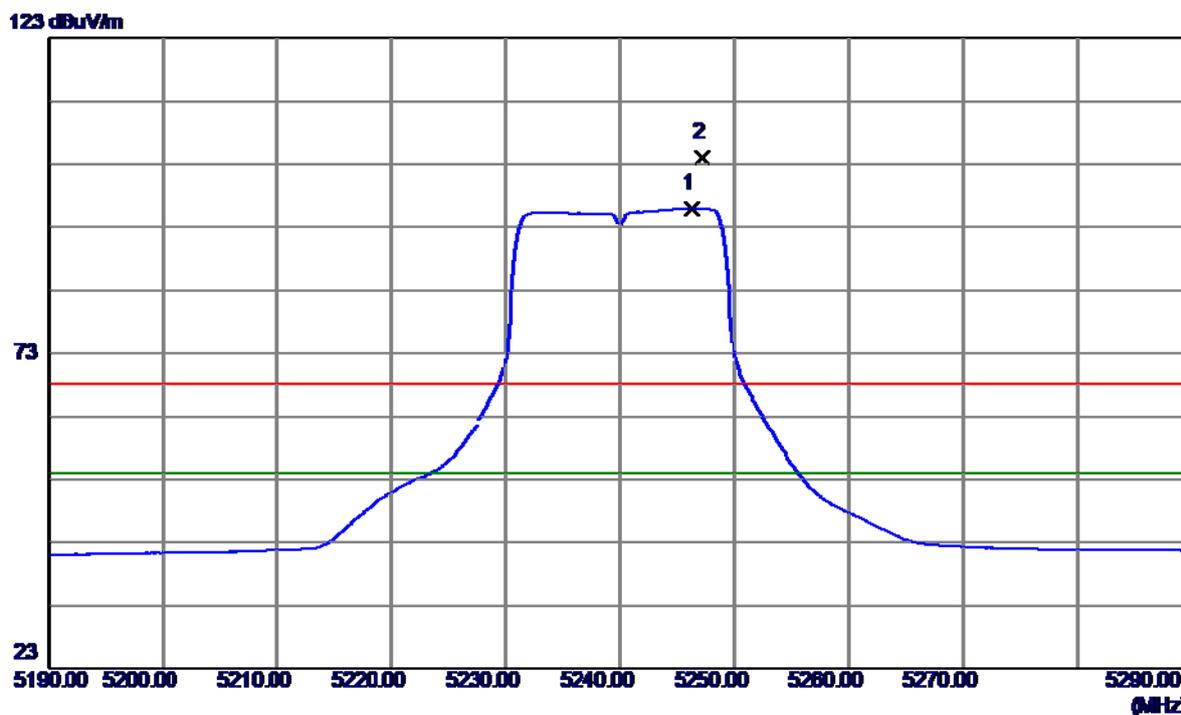

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5246.3000	55.66	40.42	96.08	54.00	42.08	AVG	no limit
2	5247.2000	63.63	40.42	104.05	68.30	35.75	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

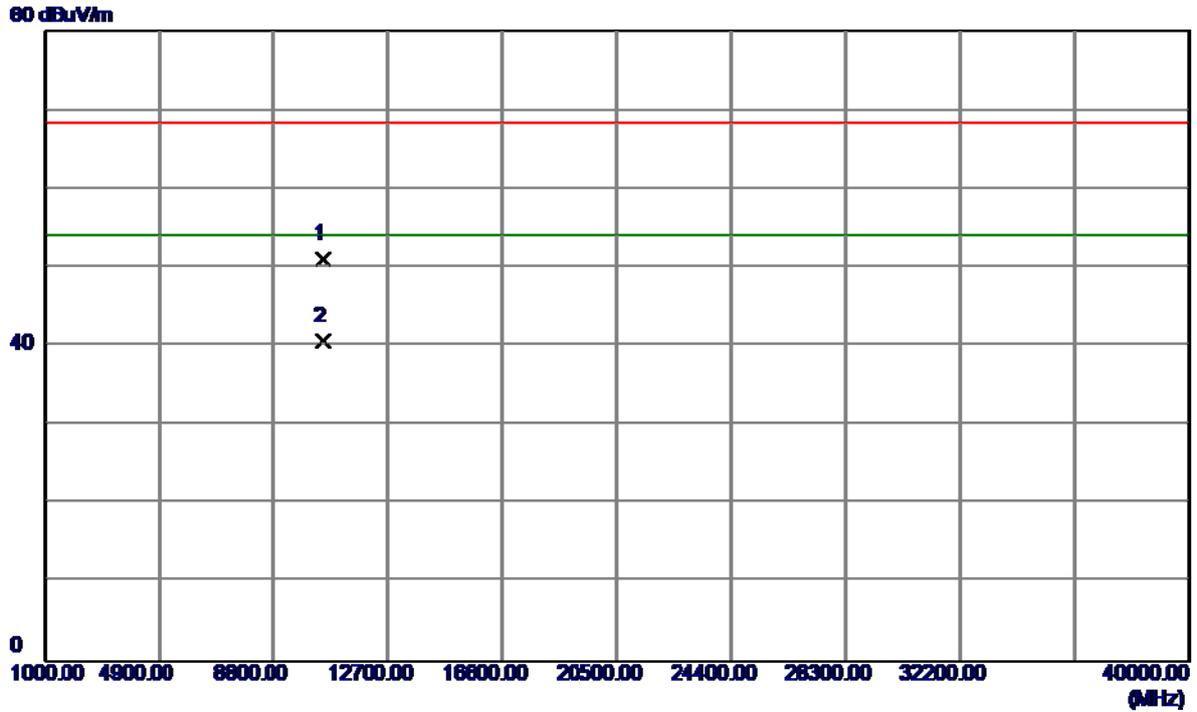


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.3099	37.33	13.69	51.02	68.30	-17.28	Peak	
2	10480.3099	26.92	13.69	40.61	54.00	-13.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical


123 dBuV/m

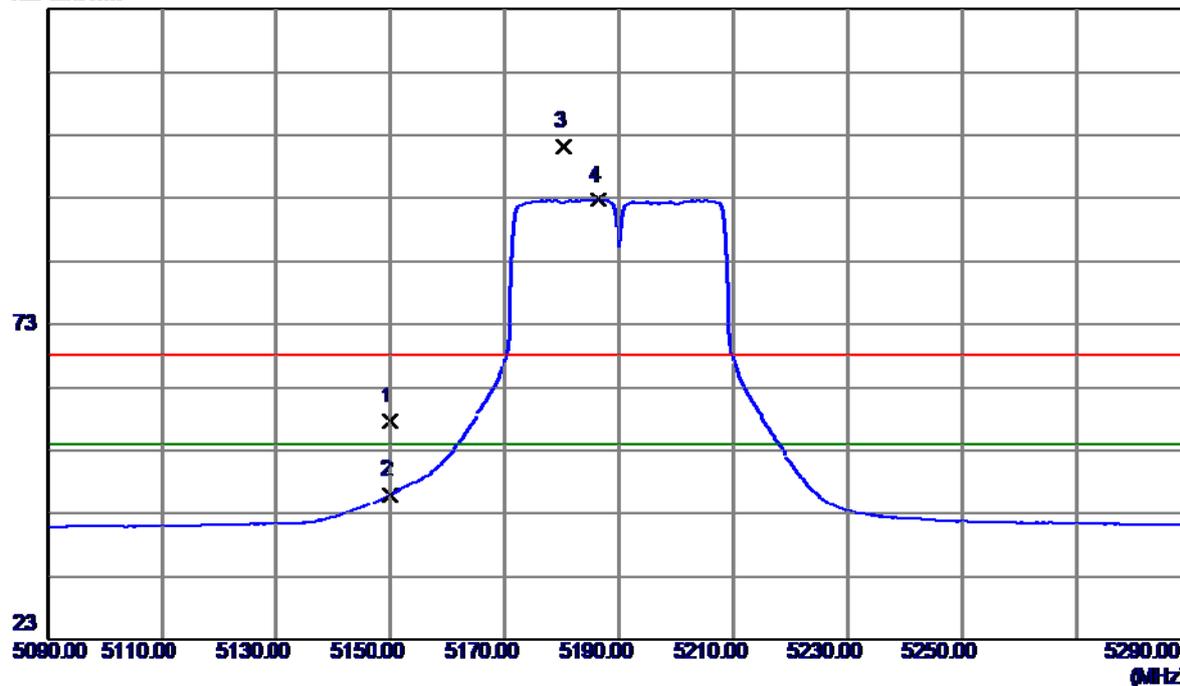

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	17.44	40.22	57.66	68.30	-10.64	Peak	
2	5150.0000	5.84	40.22	46.06	54.00	-7.94	AVG	
3	5180.2000	60.96	40.28	101.24	68.30	32.94	Peak	no limit
4	5186.4000	52.40	40.30	92.70	54.00	38.70	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

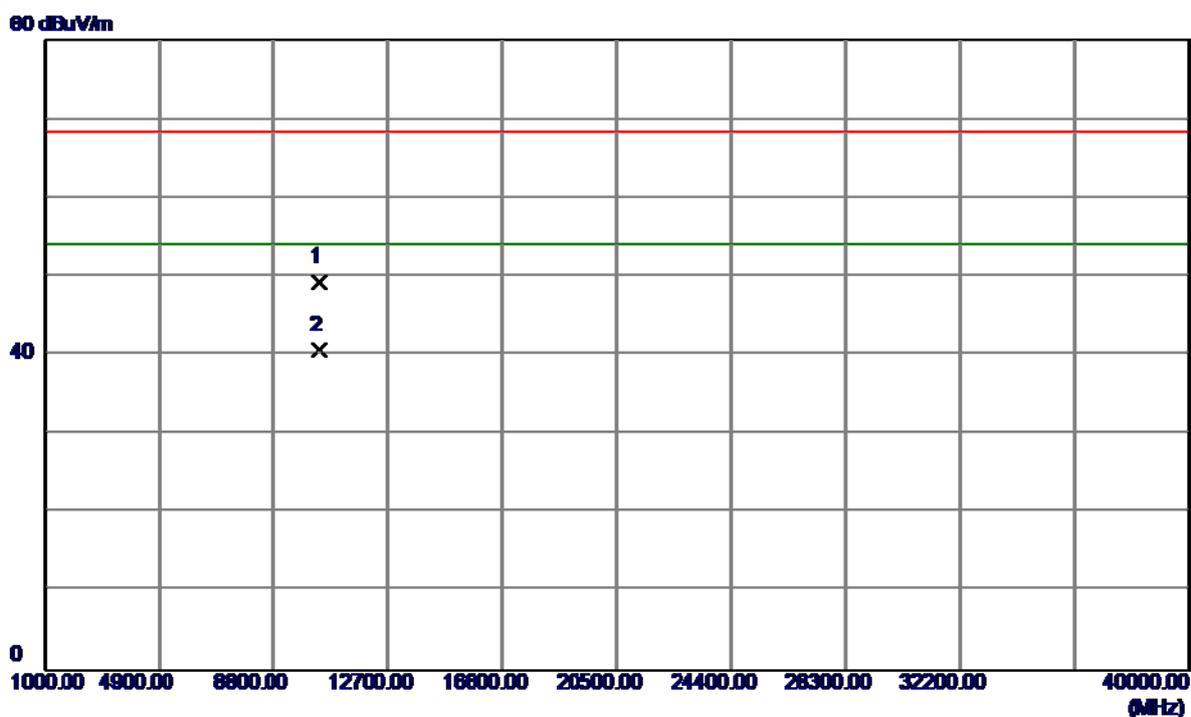


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10381.4500	35.45	13.83	49.28	68.30	-19.02	Peak	
2	10381.4500	26.84	13.83	40.67	54.00	-13.33	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal


123 dBuV/m

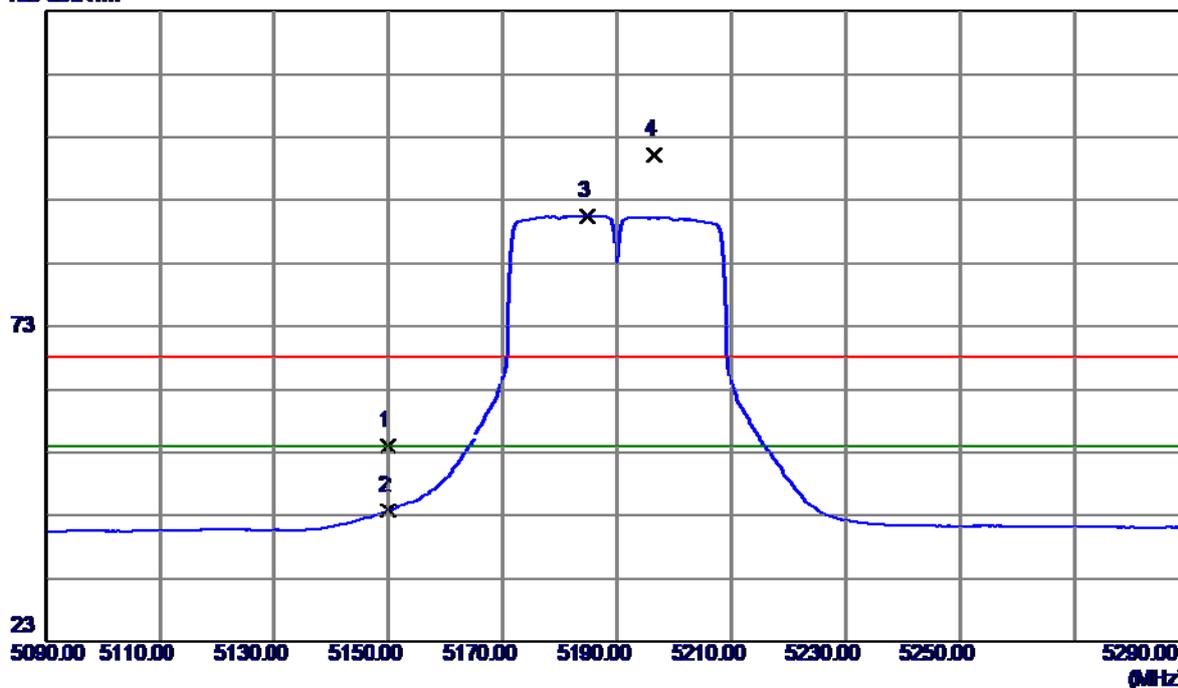

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	13.80	40.22	54.02	68.30	-14.28	Peak	
2	5150.0000	3.49	40.22	43.71	54.00	-10.29	AVG	
3	5184.8000	50.21	40.29	90.50	54.00	36.50	AVG	no limit
4	5196.4000	59.84	40.32	100.16	68.30	31.86	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Horizontal

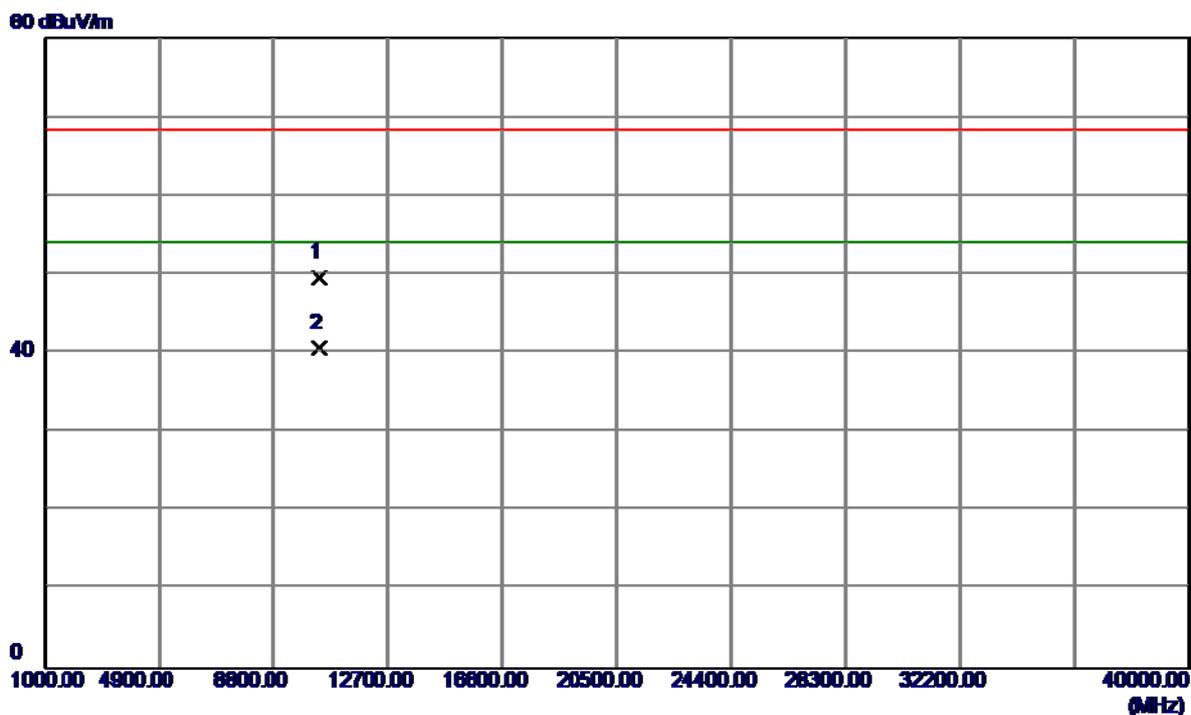


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10381.3800	35.73	13.83	49.56	68.30	-18.74	Peak	
2	10381.3800	26.88	13.83	40.71	54.00	-13.29	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical


123 dBuV/m

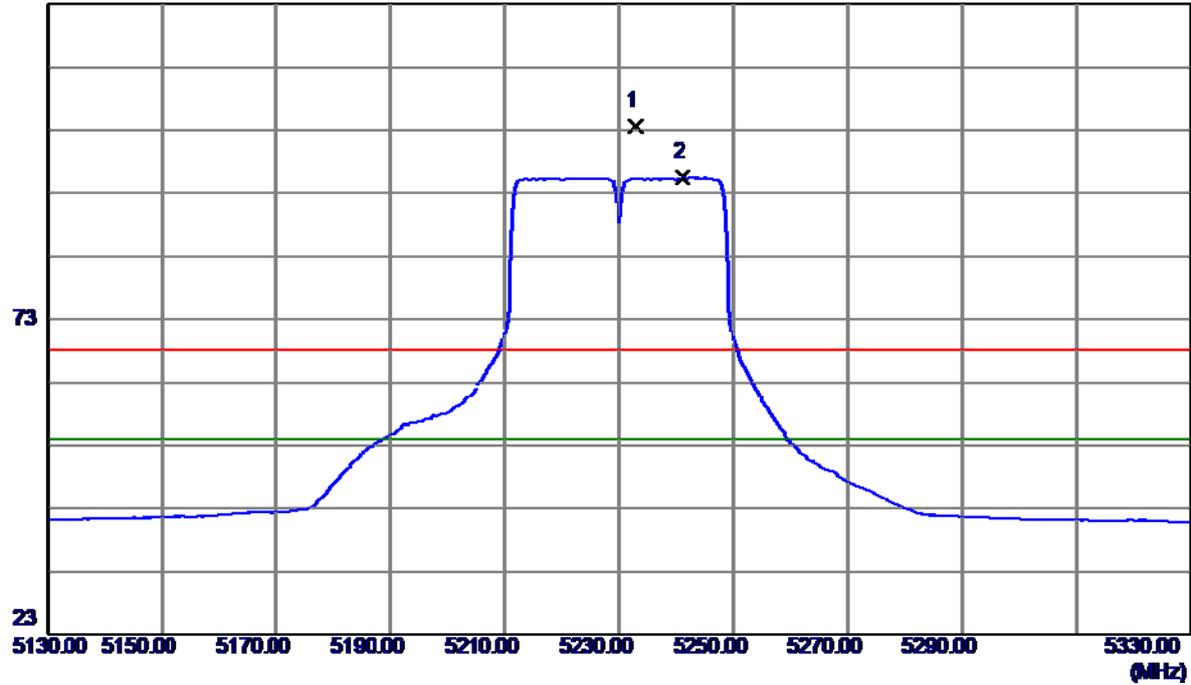

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5232.8000	63.17	40.39	103.56	68.30	35.26	Peak	no limit
2	5241.2000	55.21	40.41	95.62	54.00	41.62	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

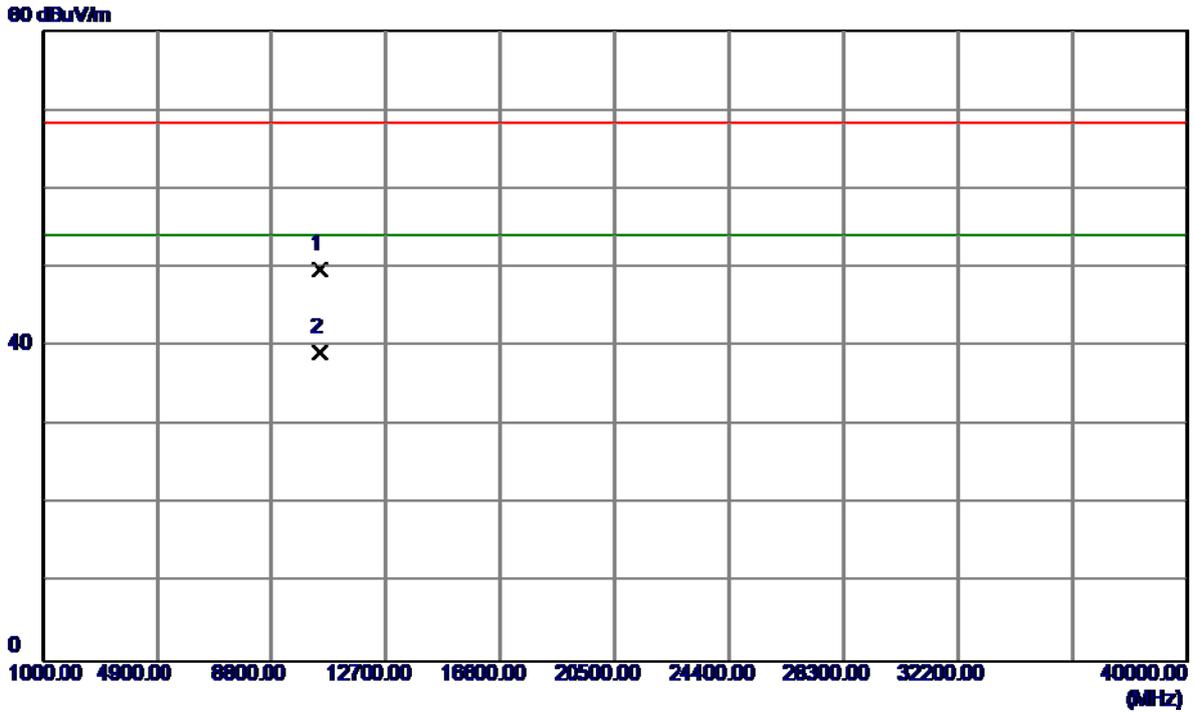

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10460.3900	36.10	13.72	49.82	68.30	-18.48	Peak	
2	10460.3900	25.44	13.72	39.16	54.00	-14.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Horizontal

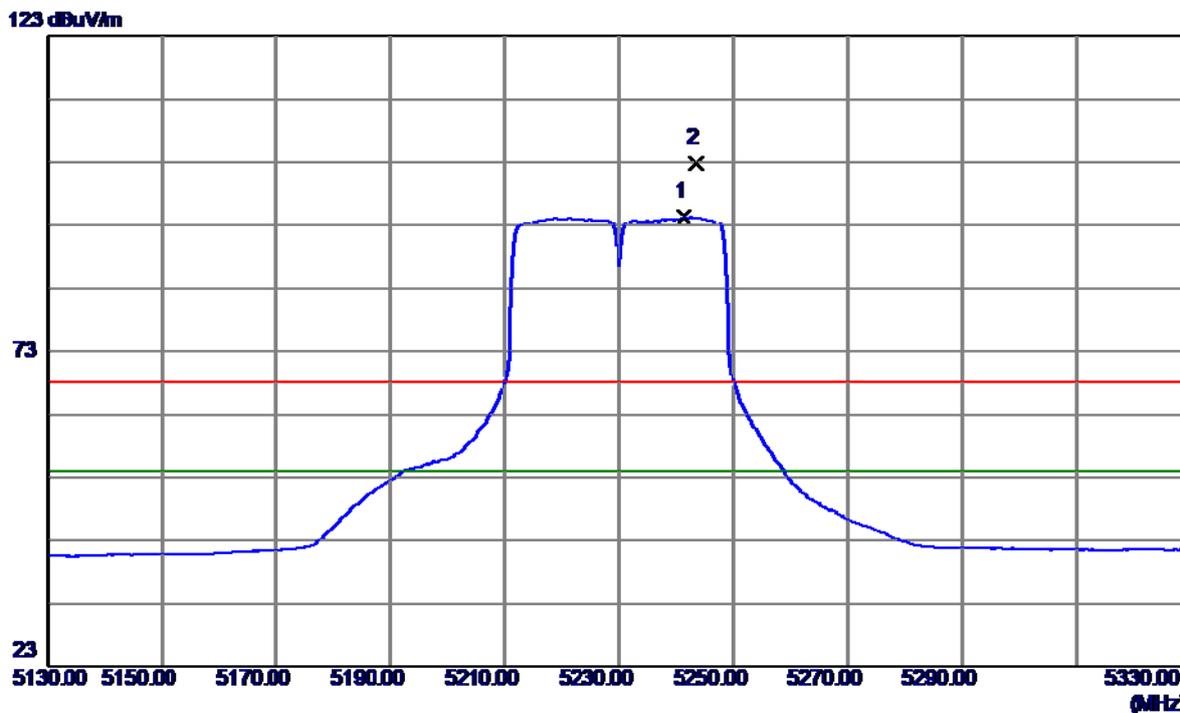

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5241.4000	53.93	40.41	94.34	54.00	40.34	AVG	no limit
2	5243.6000	62.34	40.42	102.76	68.30	34.46	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

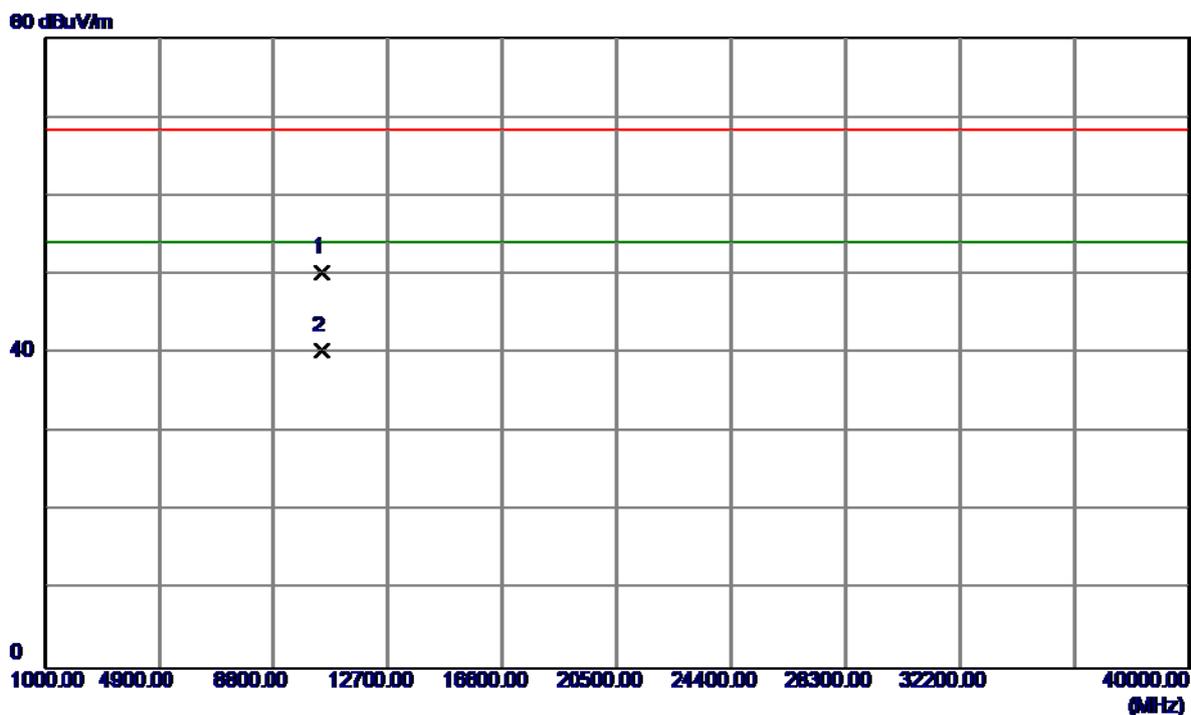


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10461.9600	36.46	13.72	50.18	68.30	-18.12	Peak	
2	10461.9600	26.65	13.72	40.37	54.00	-13.63	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical


123 dBuV/m

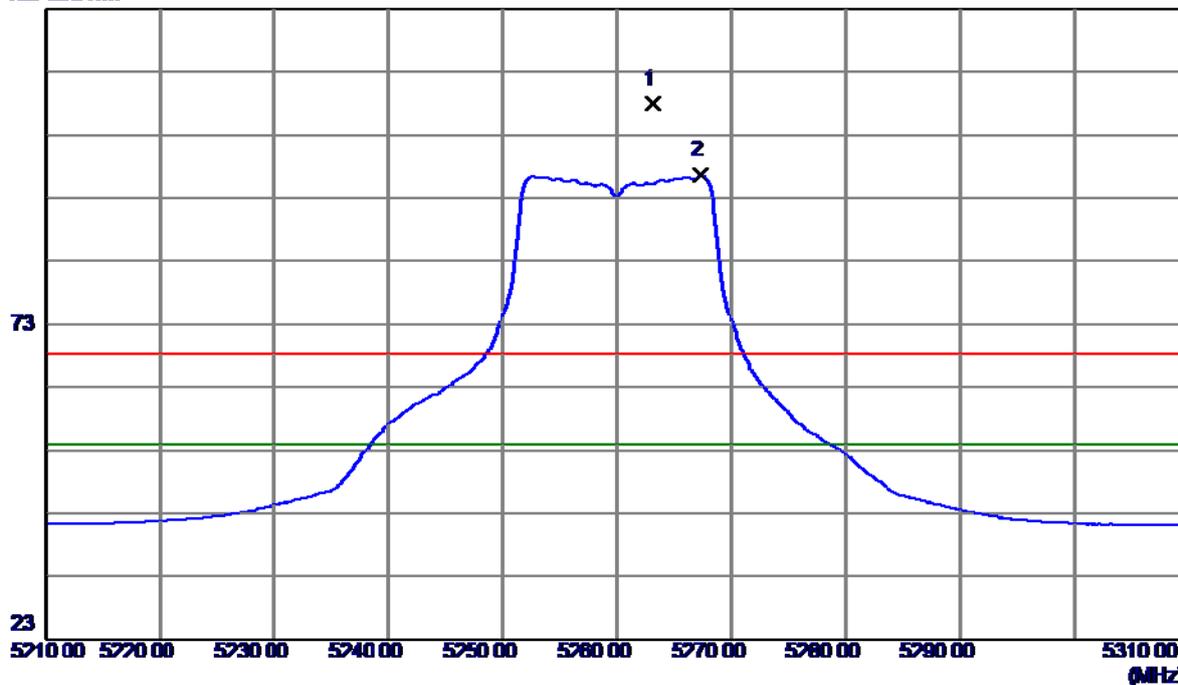

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5263.1000	67.44	40.46	107.90	68.30	39.60	Peak	no limit
2	5267.3000	56.04	40.47	96.51	54.00	42.51	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

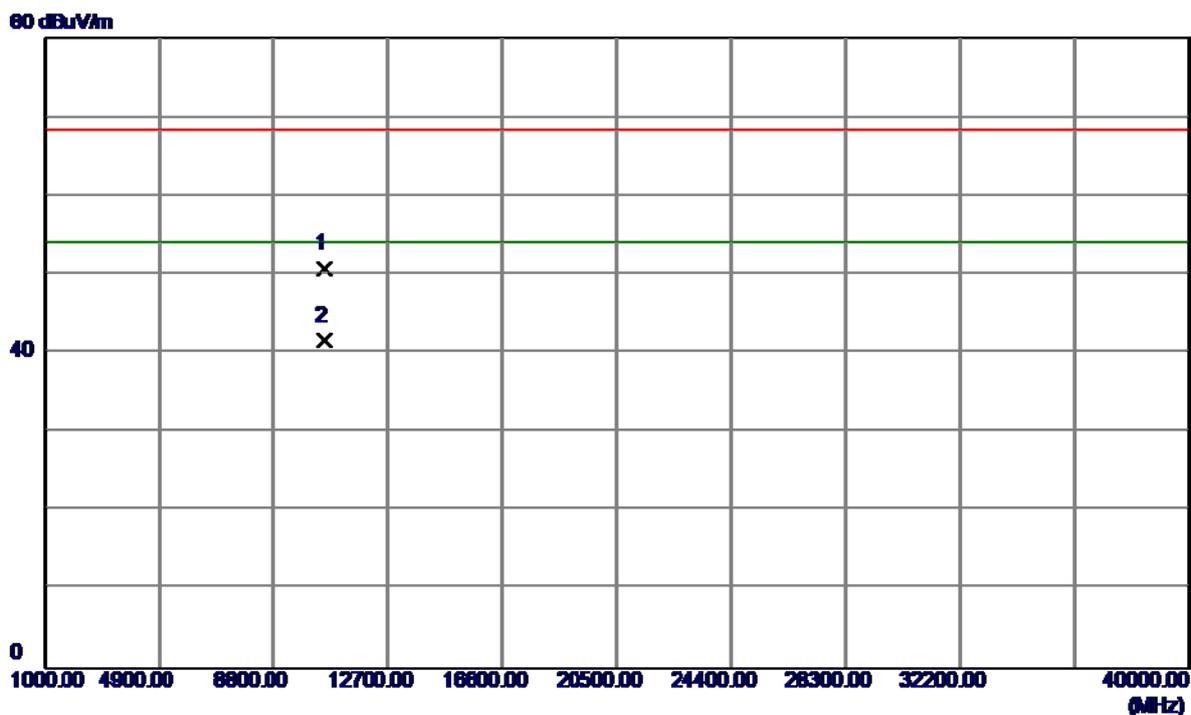


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10520.1100	36.97	13.75	50.72	68.30	-17.58	Peak	
2	10520.1100	27.92	13.75	41.67	54.00	-12.33	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Horizontal


123 dBuV/m

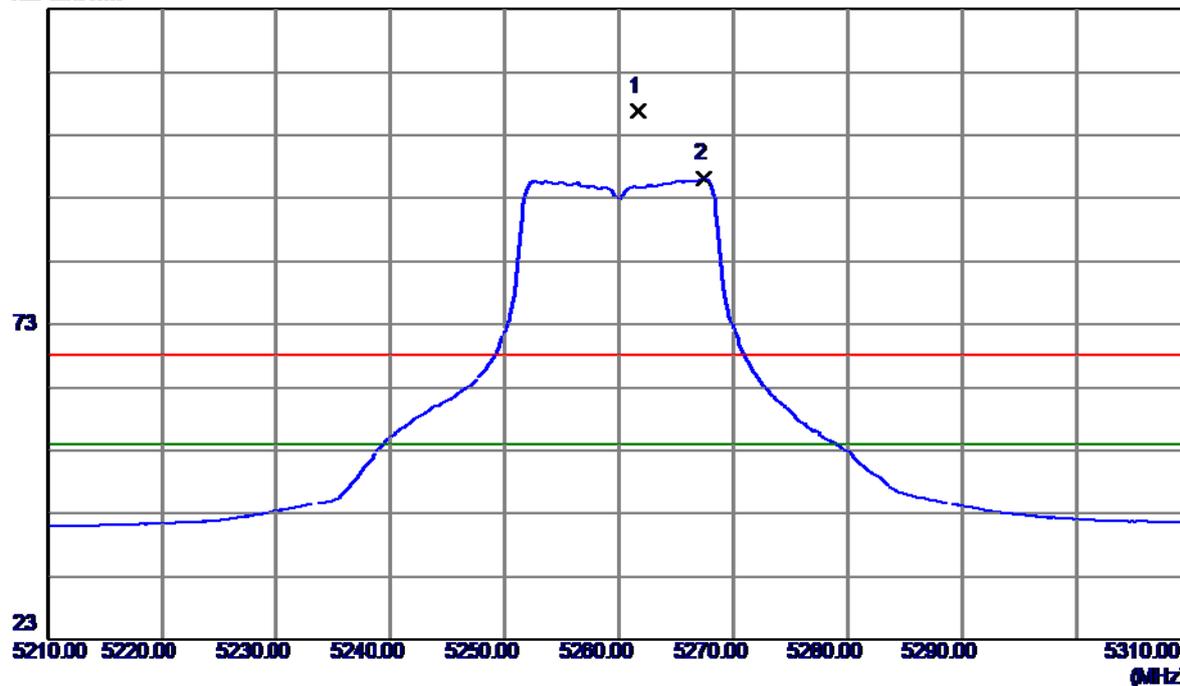

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5261.7000	66.40	40.45	106.85	68.30	38.55	Peak	no limit
2	5267.4000	55.77	40.47	96.24	54.00	42.24	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

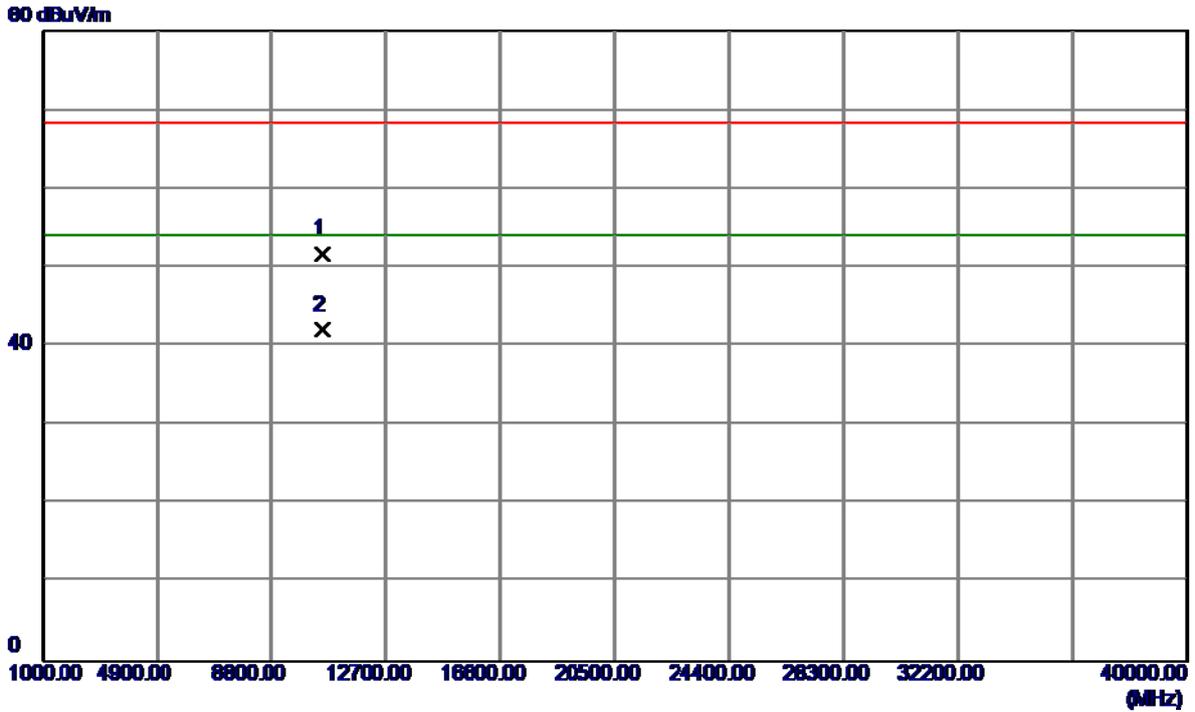

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10522.3400	37.95	13.76	51.71	68.30	-16.59	Peak	
2	10522.3400	28.39	13.76	42.15	54.00	-11.85	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Vertical

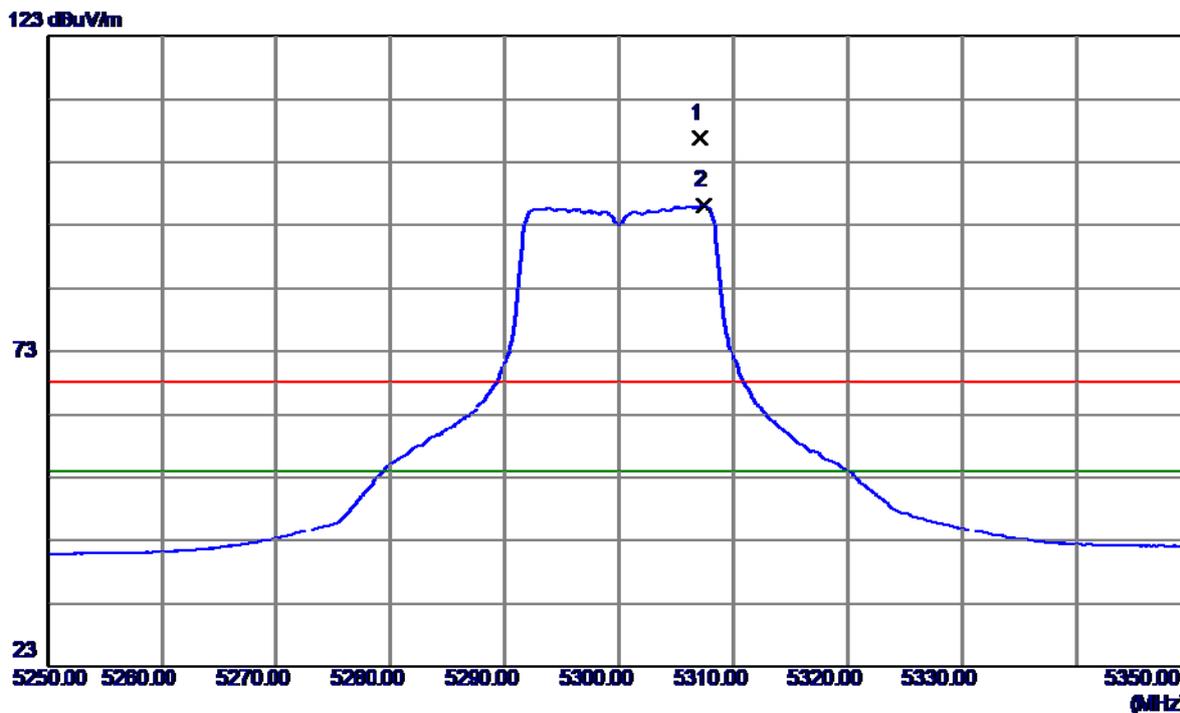

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5307.1000	66.21	40.55	106.76	68.30	38.46	Peak	no limit
2	5307.4000	55.72	40.55	96.27	54.00	42.27	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Vertical

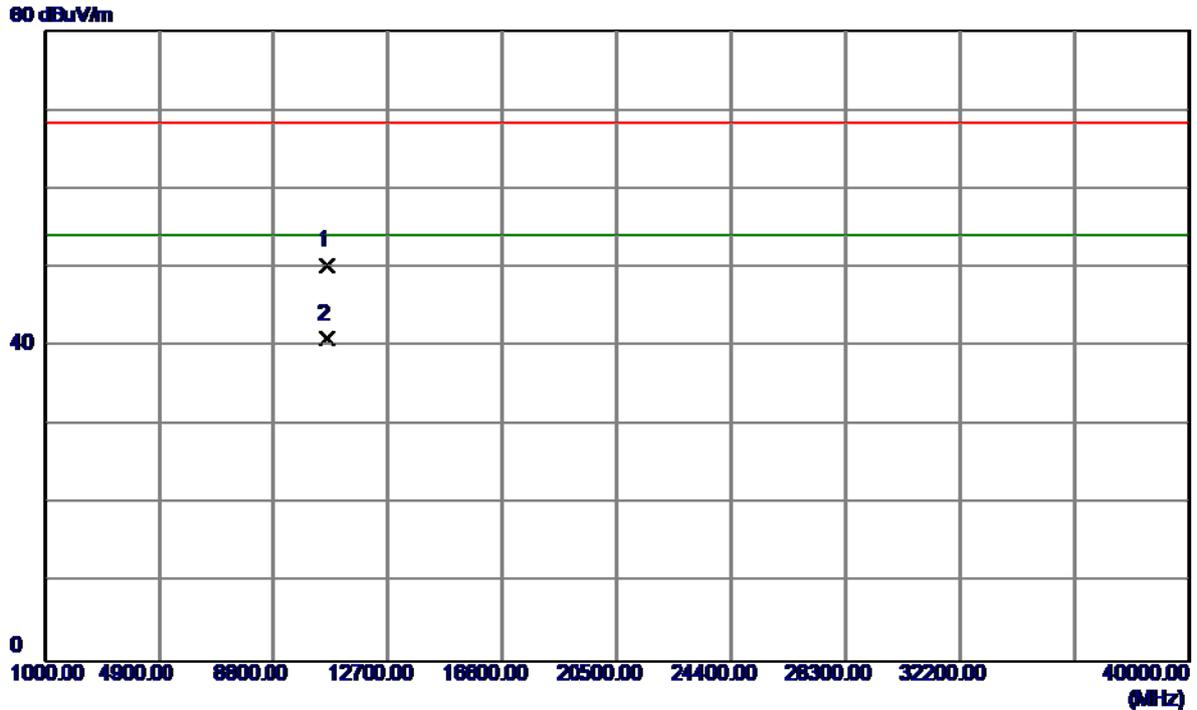

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10600.1700	36.14	14.08	50.22	68.30	-18.08	Peak	
2	10600.1700	26.81	14.08	40.89	54.00	-13.11	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Horizontal

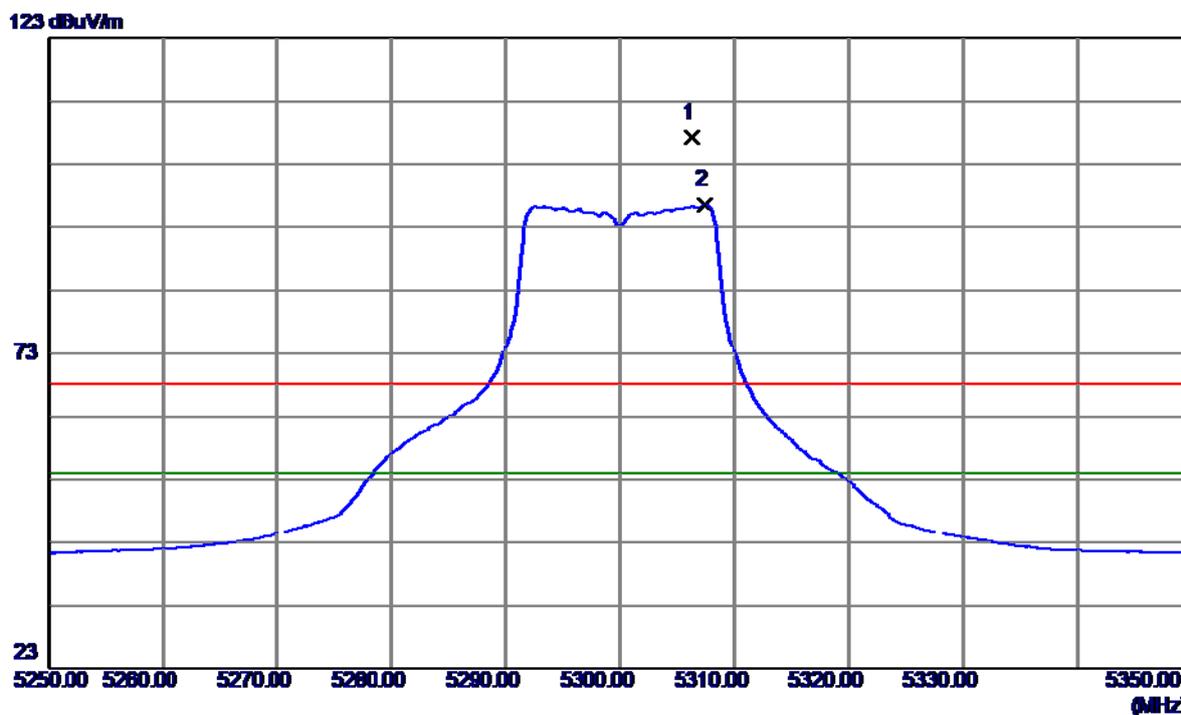

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5306.3000	66.70	40.55	107.25	68.30	38.95	Peak	no limit
2	5307.4000	56.11	40.55	96.66	54.00	42.66	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5300MHz


Horizontal

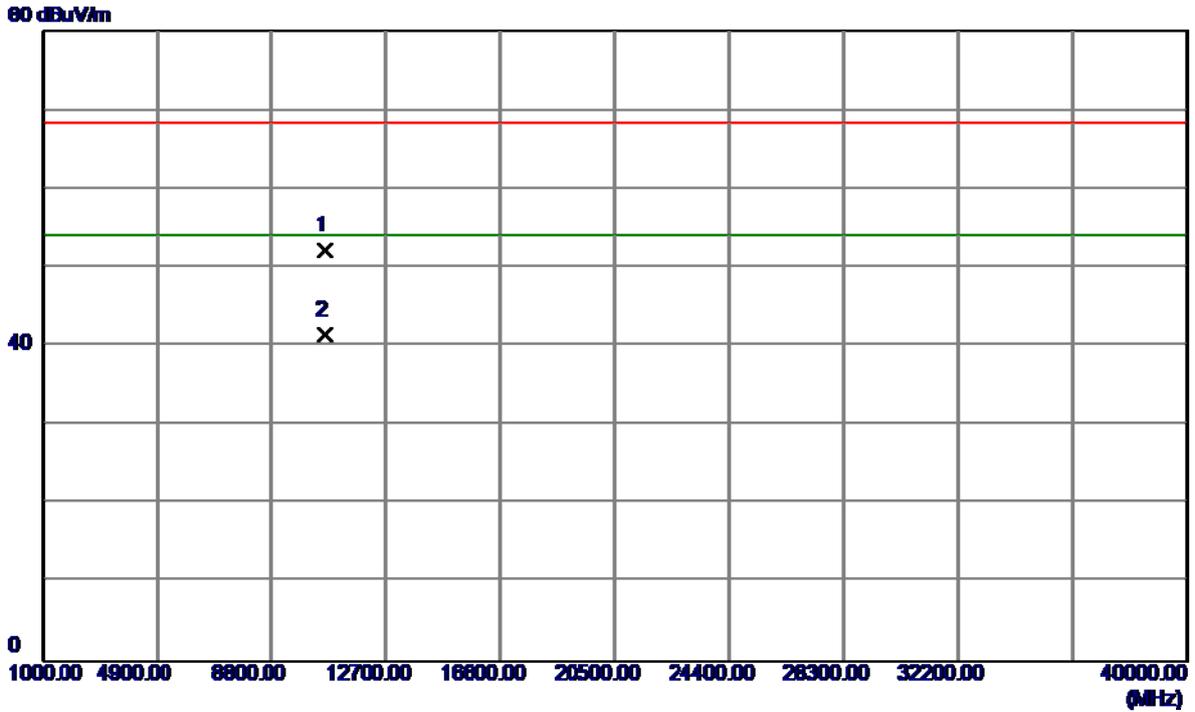

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10600.8099	38.07	14.09	52.16	68.30	-16.14	Peak	
2	10600.8099	27.37	14.09	41.46	54.00	-12.54	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

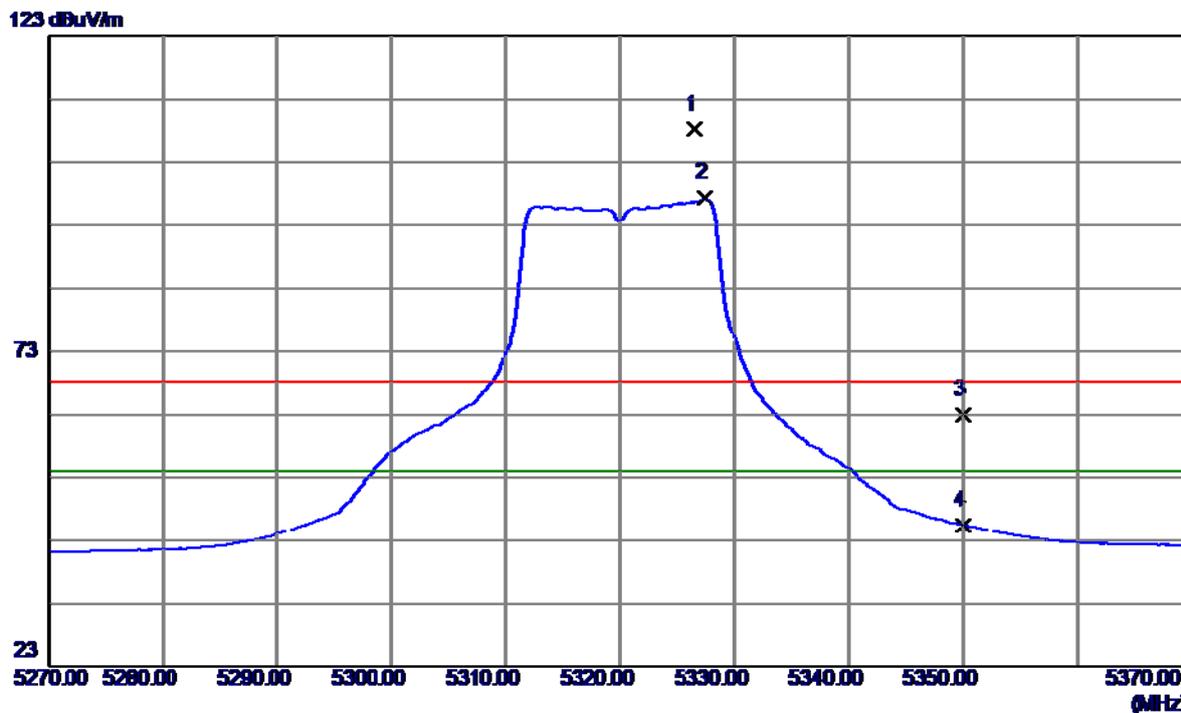

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5326.6000	67.61	40.59	108.20	68.30	39.90	Peak	no limit
2	5327.4000	56.72	40.59	97.31	54.00	43.31	AVG	no limit
3	5350.0000	22.28	40.64	62.92	68.30	-5.38	Peak	
4	5350.0000	4.81	40.64	45.45	54.00	-8.55	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

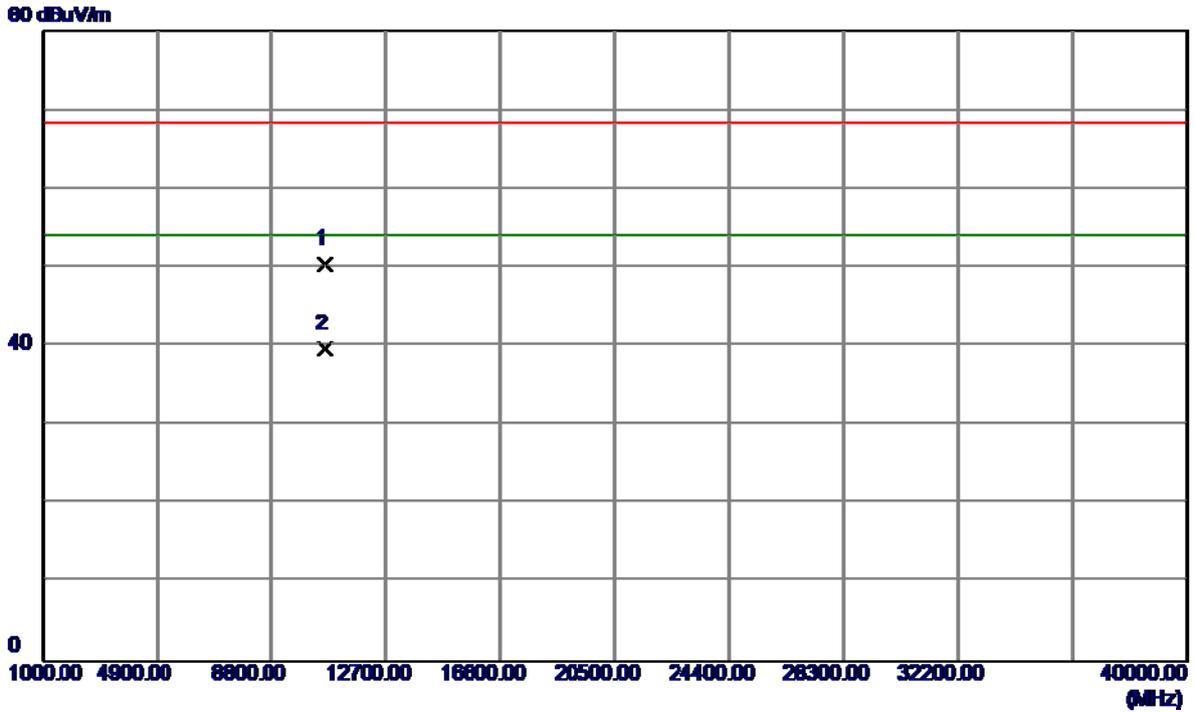

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10641.0500	36.08	14.25	50.33	68.30	-17.97	Peak	
2	10641.0500	25.41	14.25	39.66	54.00	-14.34	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

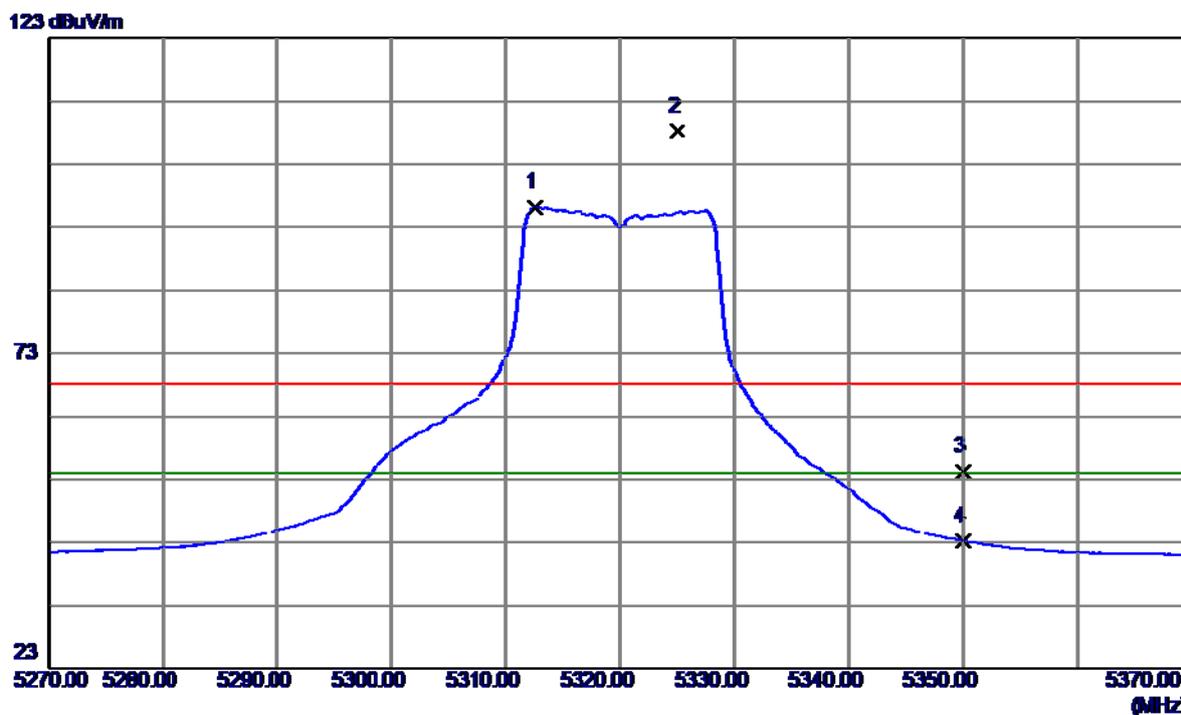

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5312.6000	55.73	40.56	96.29	54.00	42.29	AVG	no limit
2	5325.0000	67.53	40.59	108.12	68.30	39.82	Peak	no limit
3	5350.0000	13.64	40.64	54.28	68.30	-14.02	Peak	
4	5350.0000	2.58	40.64	43.22	54.00	-10.78	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

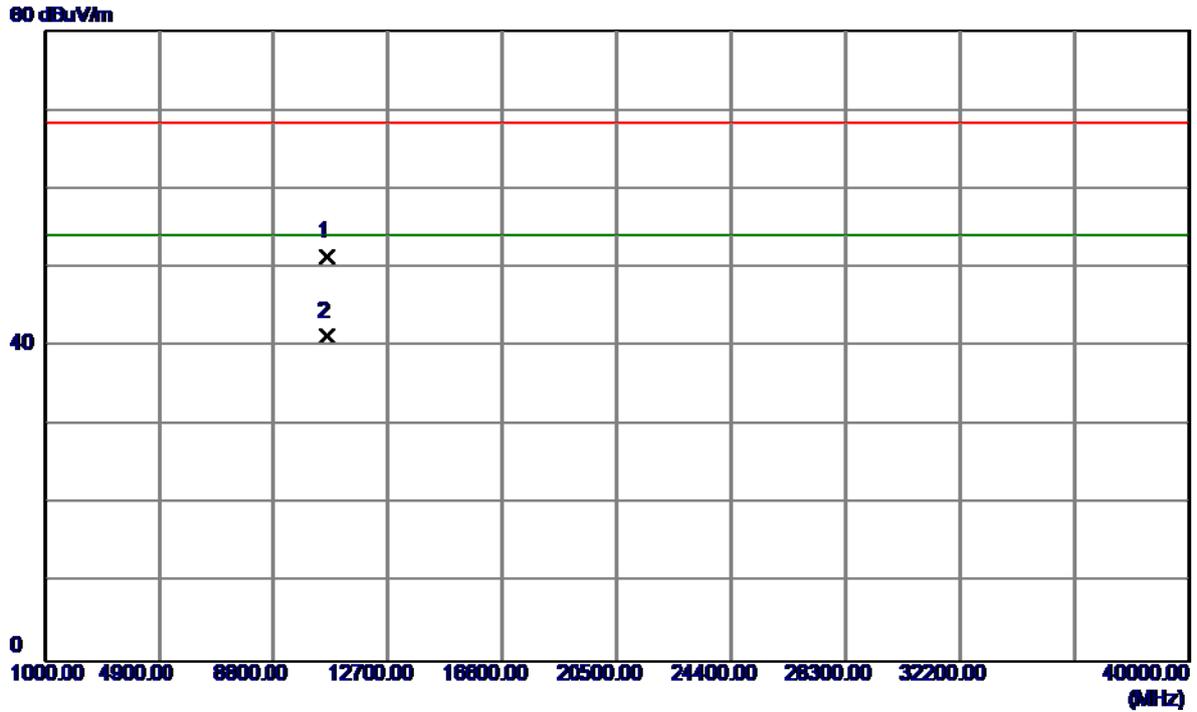

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10641.2600	37.17	14.25	51.42	68.30	-16.88	Peak	
2	10641.2600	27.04	14.25	41.29	54.00	-12.71	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

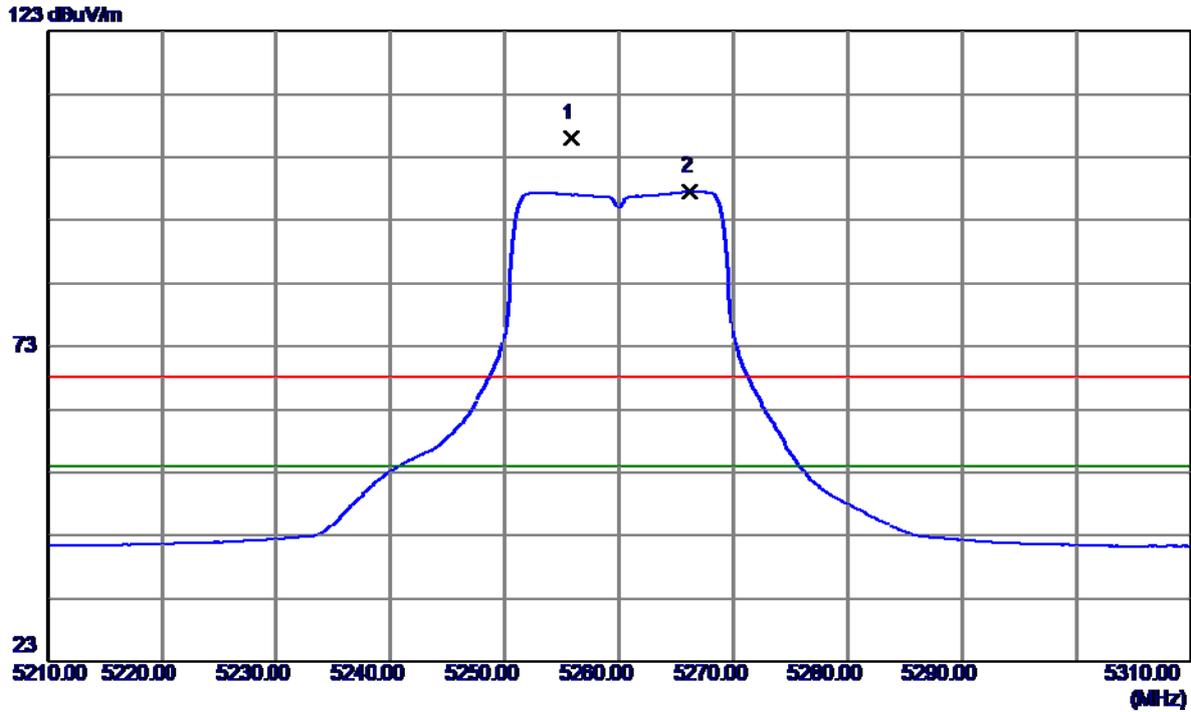

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5255.8000	65.48	40.44	105.92	68.30	37.62	Peak	no limit
2	5266.2000	57.15	40.46	97.61	54.00	43.61	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

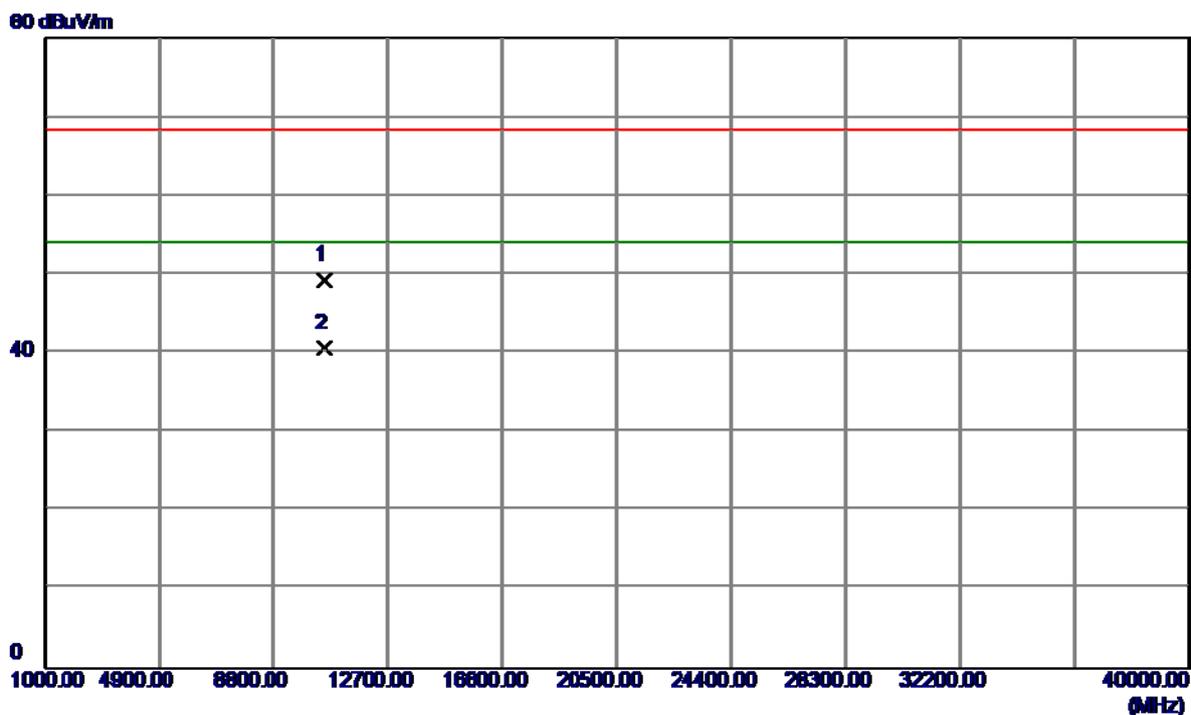

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10520.7699	35.59	13.75	49.34	68.30	-18.96	Peak	
2	10520.7699	26.83	13.75	40.58	54.00	-13.42	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Horizontal

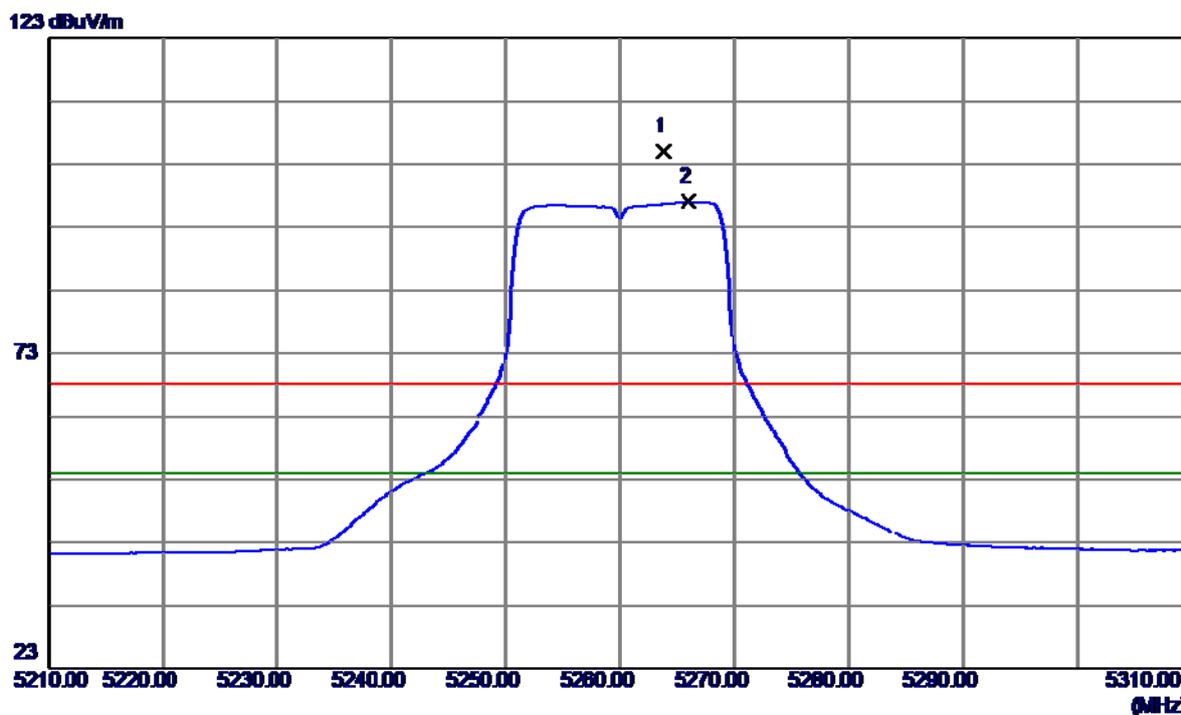

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5263.8000	64.61	40.46	105.07	68.30	36.77	Peak	no limit
2	5266.0000	56.64	40.46	97.10	54.00	43.10	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

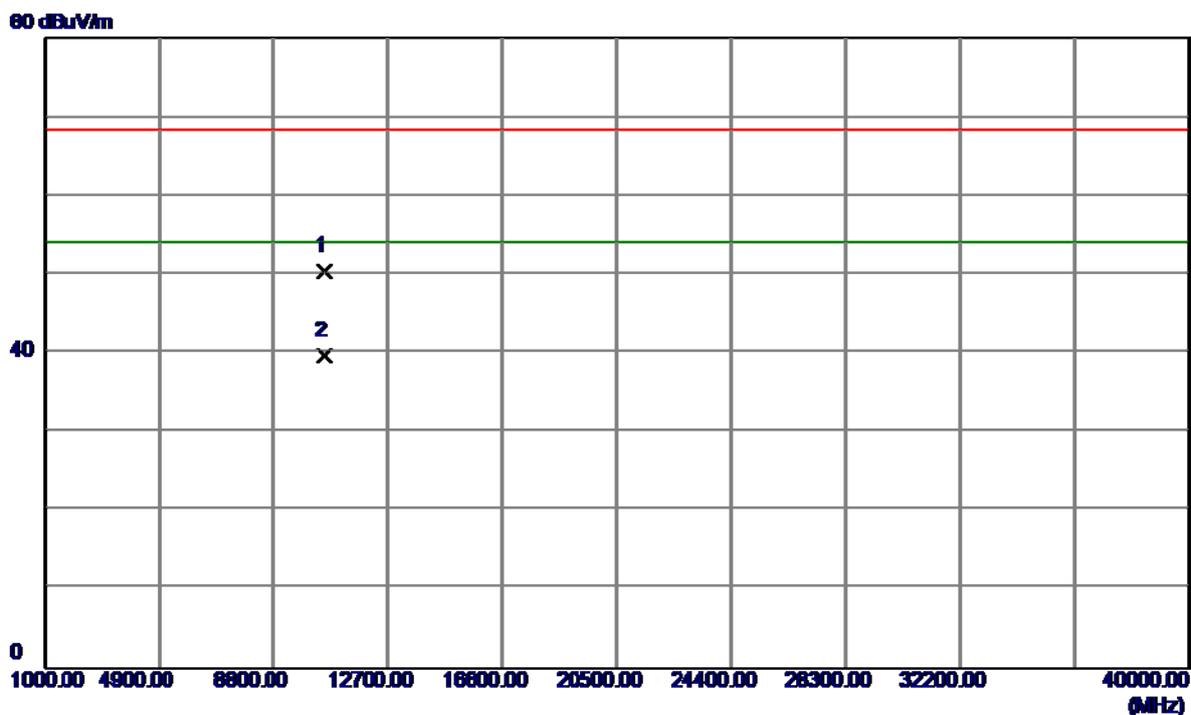


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10520.3600	36.71	13.75	50.46	68.30	-17.84	Peak	
2	10520.3600	26.00	13.75	39.75	54.00	-14.25	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz

Vertical


123 dBuV/m

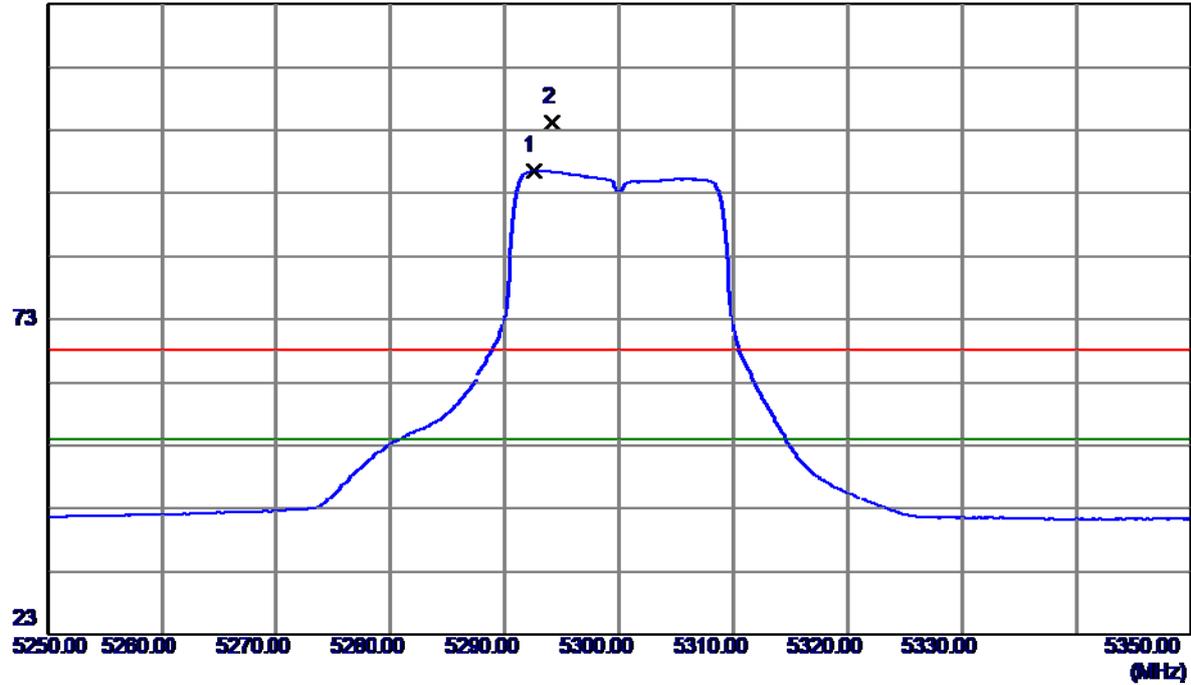

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5292.5000	56.12	40.52	96.64	54.00	42.64	AVG	no limit
2	5294.1000	63.74	40.52	104.26	68.30	35.96	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Vertical

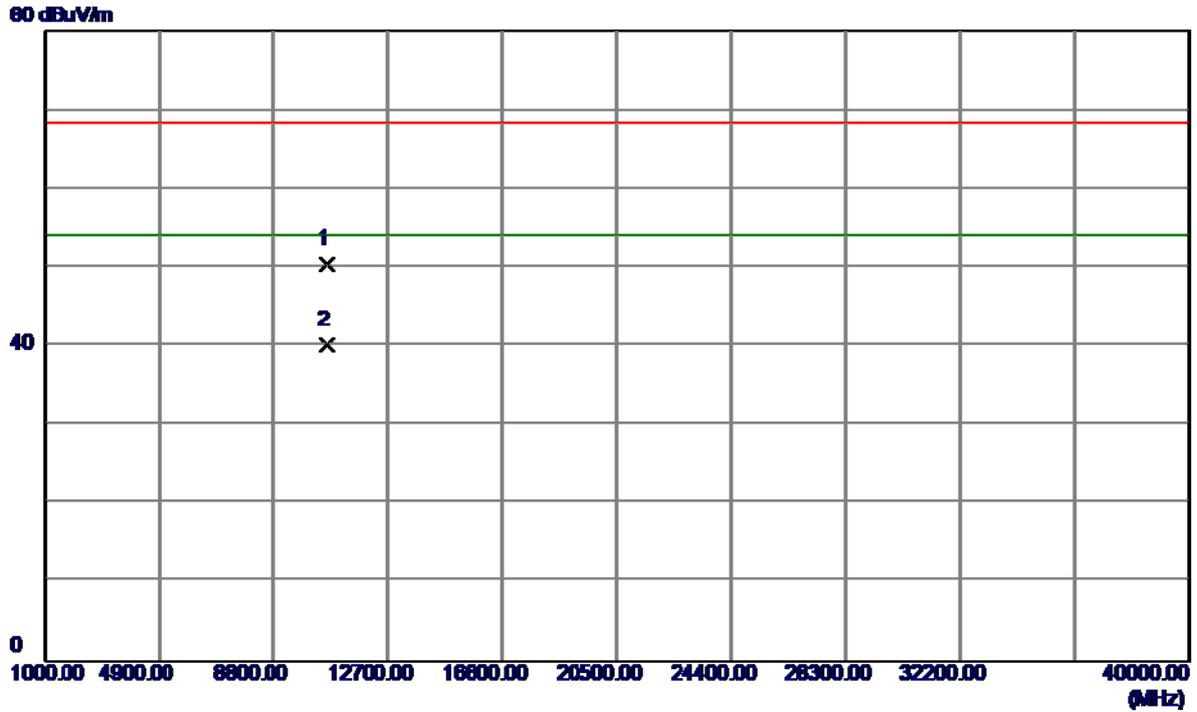

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10600.1500	36.31	14.08	50.39	68.30	-17.91	Peak	
2	10600.1500	26.04	14.08	40.12	54.00	-13.88	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Horizontal

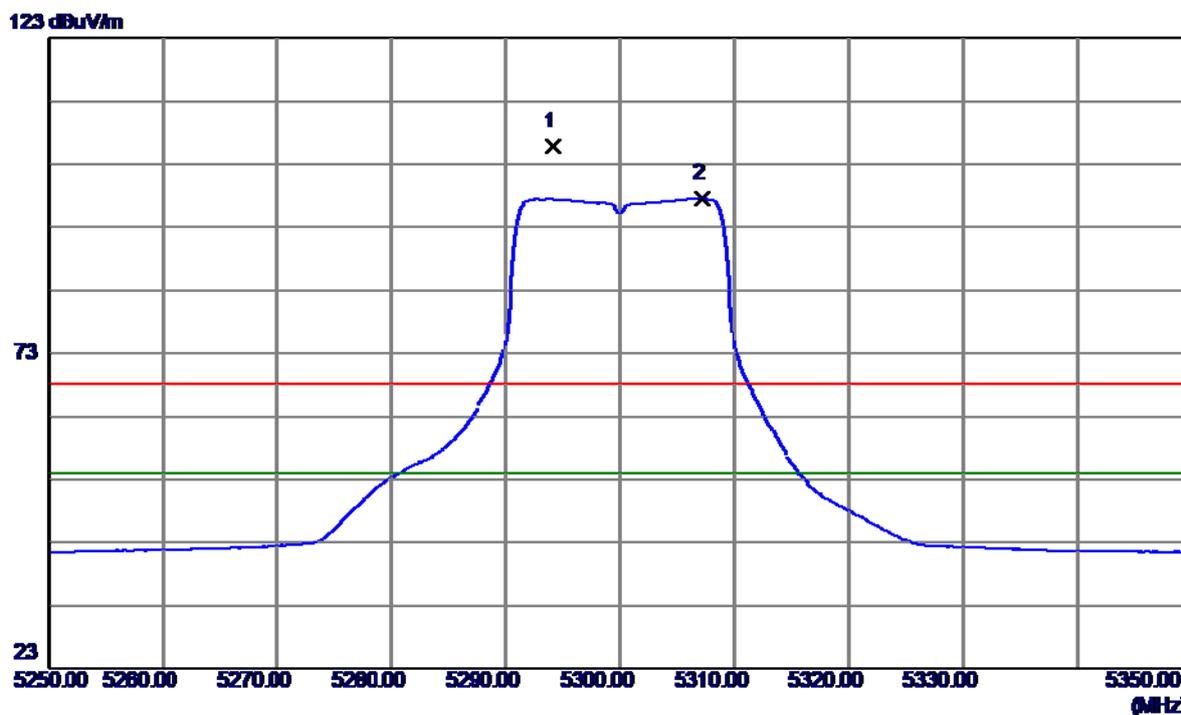

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5294.1000	65.23	40.52	105.75	68.30	37.45	Peak	no limit
2	5307.2000	57.04	40.55	97.59	54.00	43.59	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5300MHz


Horizontal

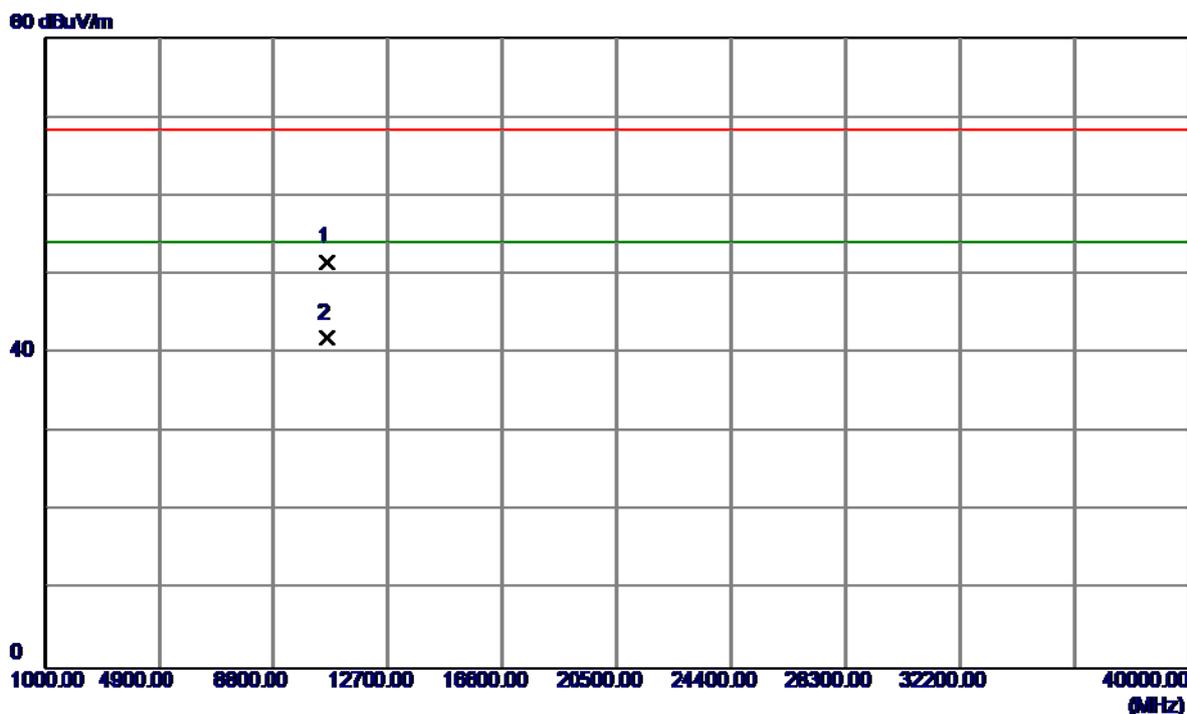

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10600.3099	37.48	14.08	51.56	68.30	-16.74	Peak	
2	10600.3099	27.89	14.08	41.97	54.00	-12.03	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

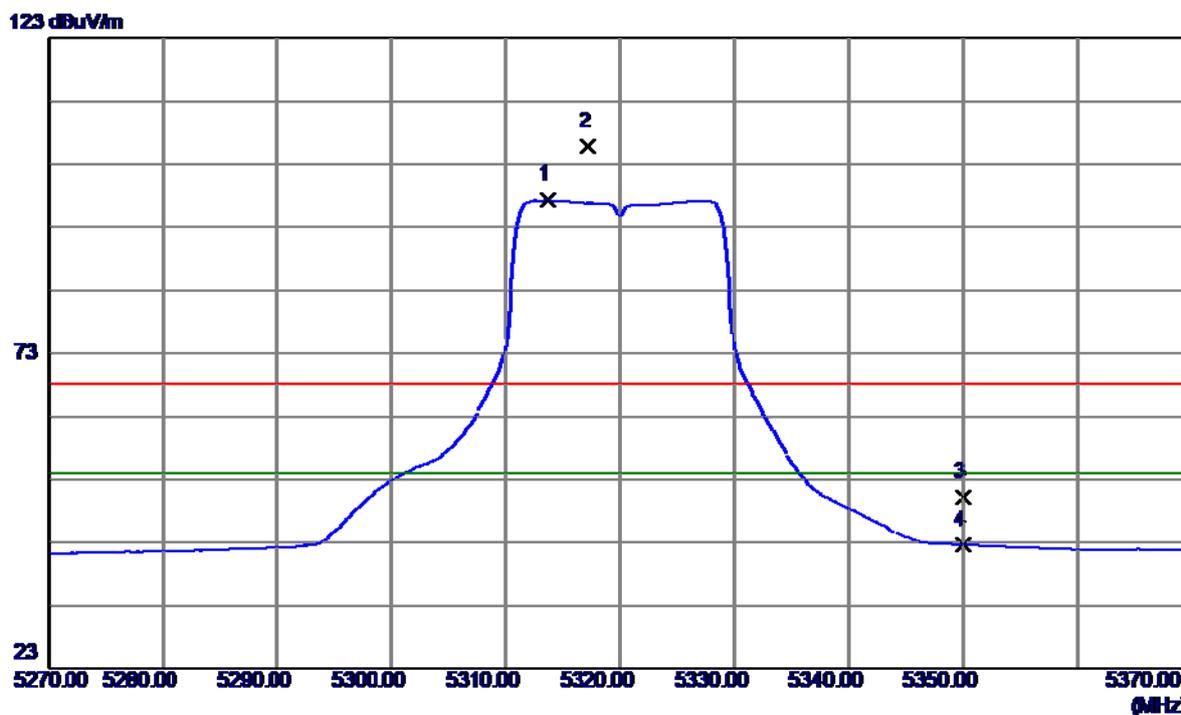

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5313.7000	56.77	40.57	97.34	54.00	43.34	AVG	no limit
2	5317.2000	65.17	40.57	105.74	68.30	37.44	Peak	no limit
3	5350.0000	9.48	40.64	50.12	68.30	-18.18	Peak	
4	5350.0000	1.94	40.64	42.58	54.00	-11.42	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

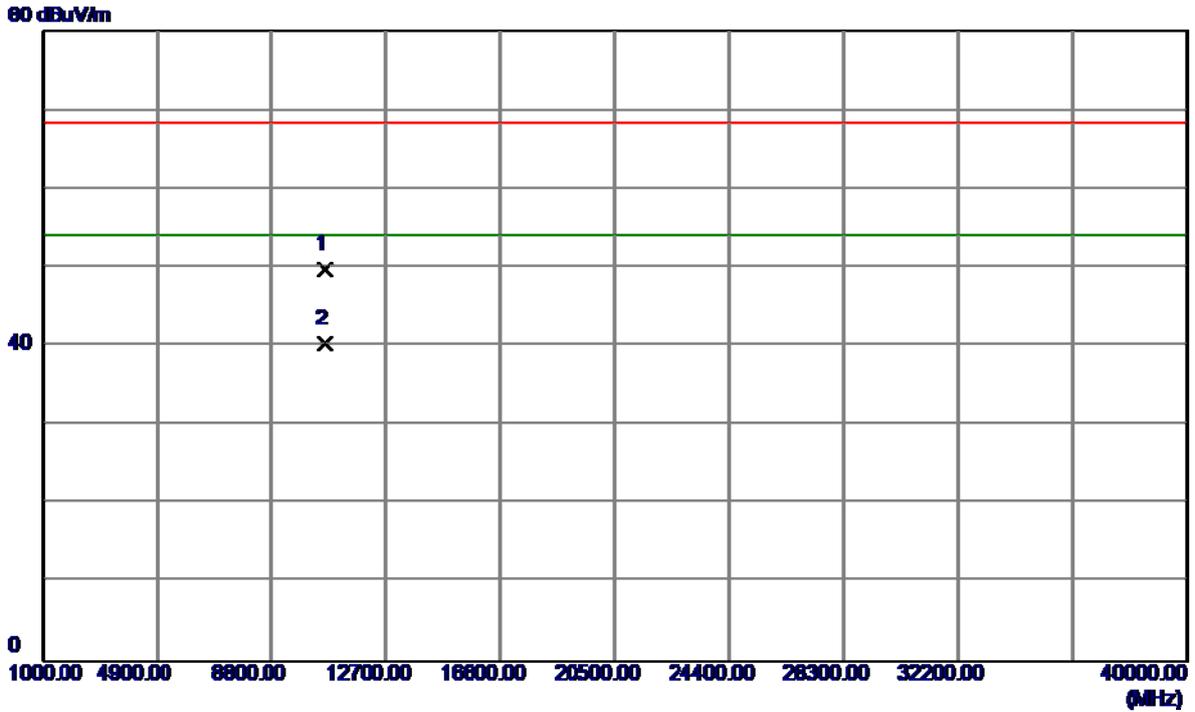


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10640.1300	35.50	14.25	49.75	68.30	-18.55	Peak	
2	10640.1300	26.06	14.25	40.31	54.00	-13.69	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal


123 dBuV/m

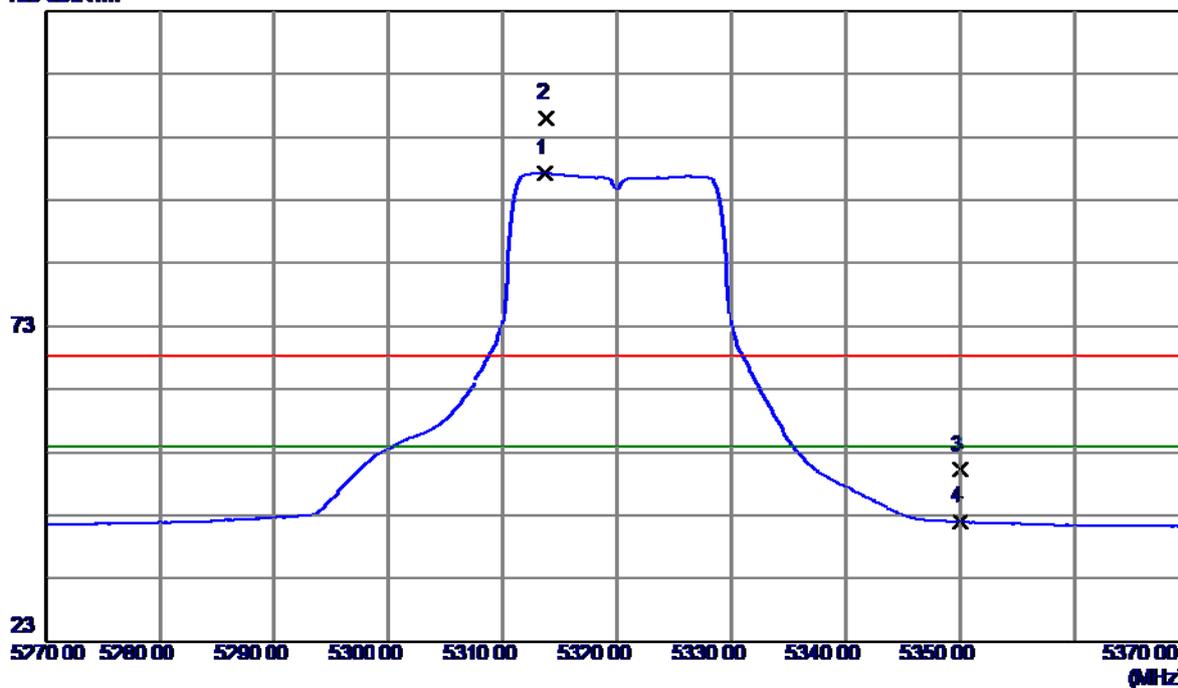

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5313.7000	56.62	40.57	97.19	54.00	43.19	AVG	no limit
2	5313.8000	65.34	40.57	105.91	68.30	37.61	Peak	no limit
3	5350.0000	9.51	40.64	50.15	68.30	-18.15	Peak	
4	5350.0000	1.34	40.64	41.98	54.00	-12.02	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

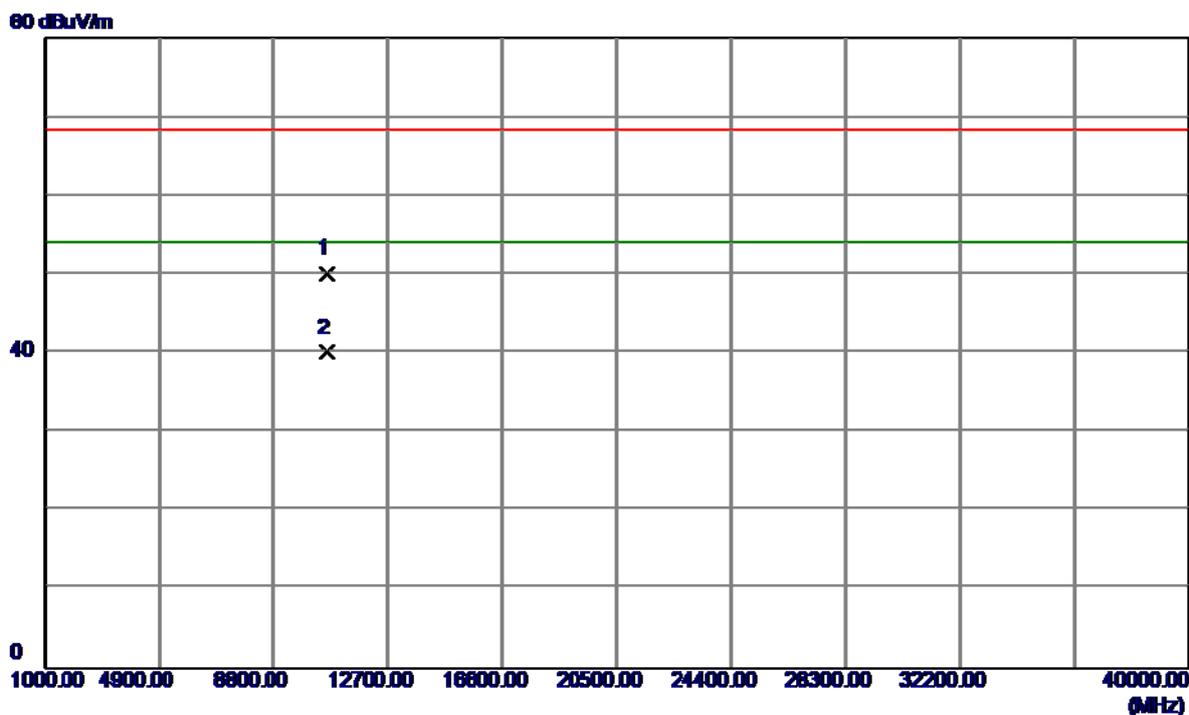

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10640.8500	35.88	14.25	50.13	68.30	-18.17	Peak	
2	10640.8500	25.83	14.25	40.08	54.00	-13.92	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

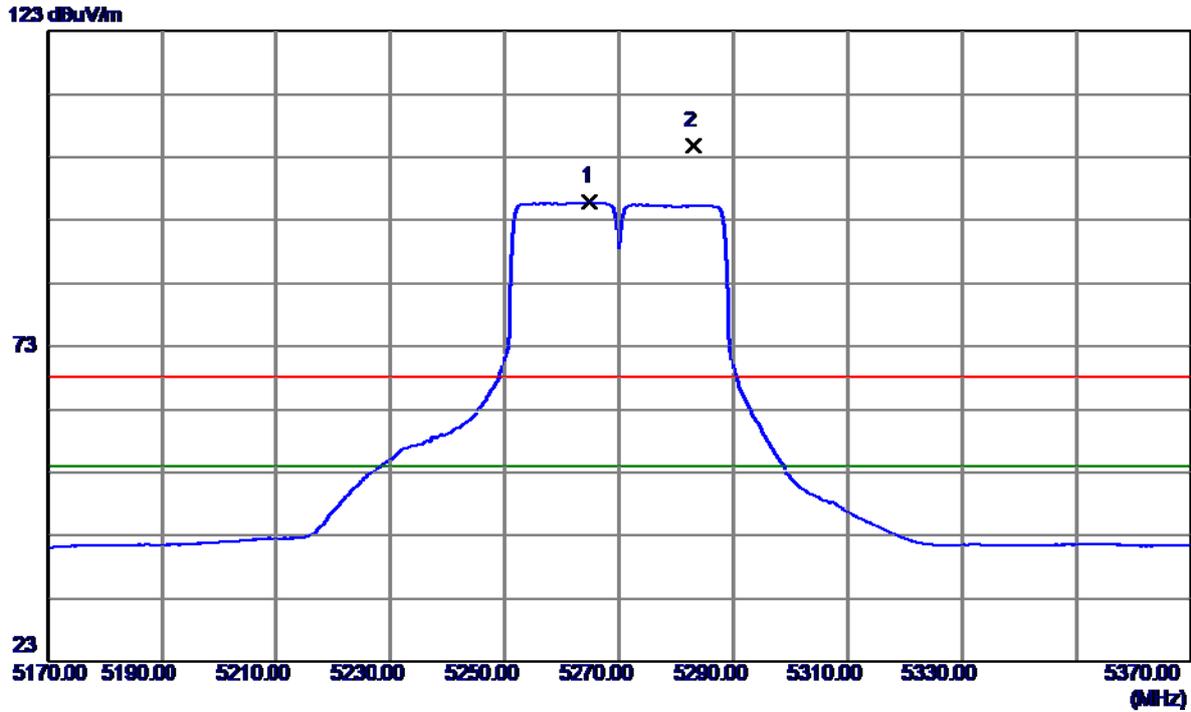

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5265.0000	55.50	40.46	95.96	54.00	41.96	AVG	no limit
2	5283.2000	64.25	40.50	104.75	68.30	36.45	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

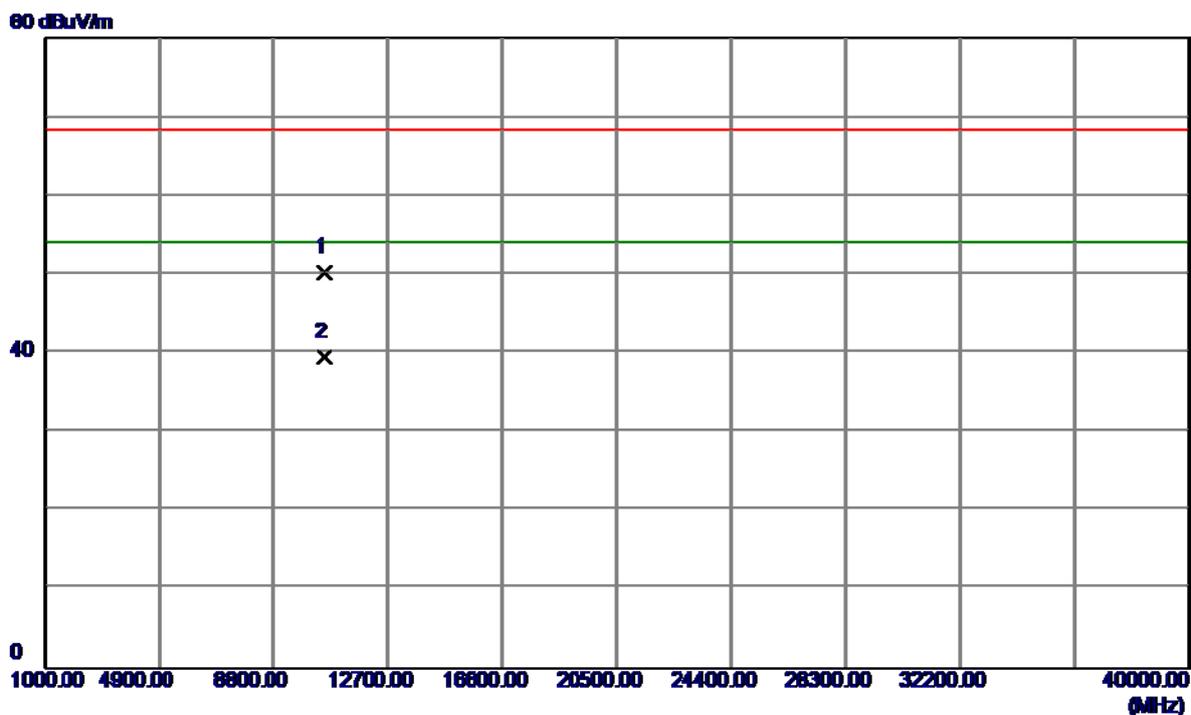

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10541.6300	36.44	13.84	50.28	68.30	-18.02	Peak	
2	10541.6300	25.73	13.84	39.57	54.00	-14.43	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

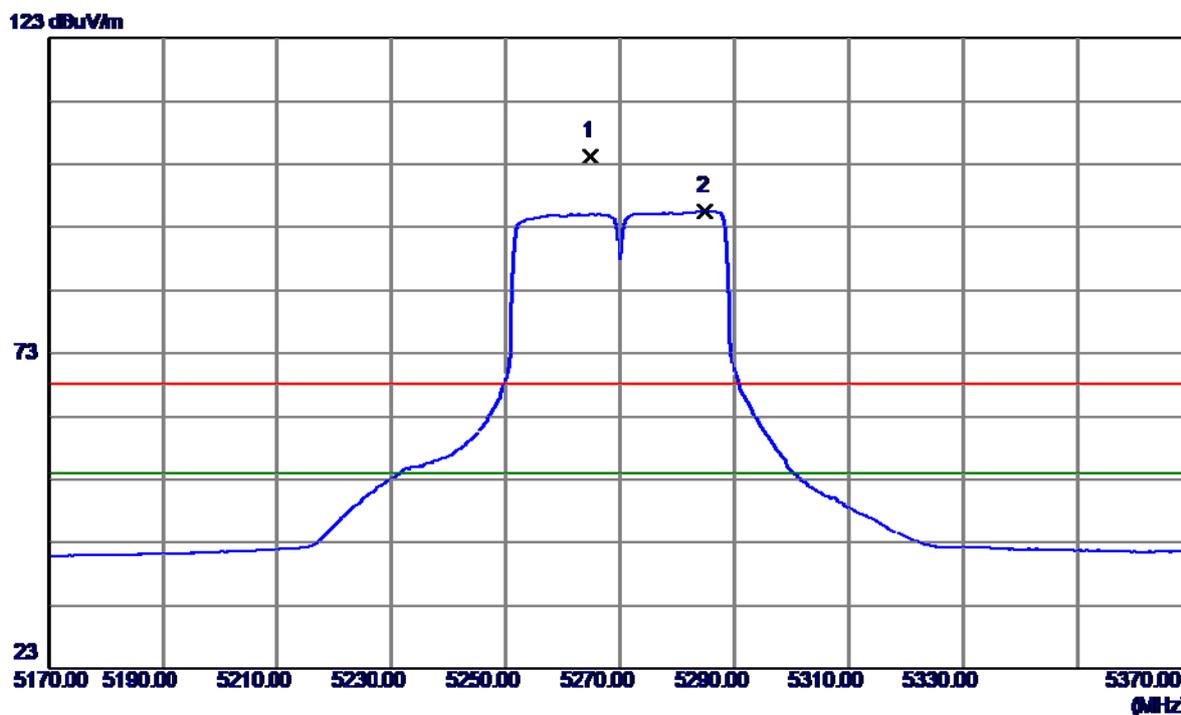

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5265.0000	63.83	40.46	104.29	68.30	35.99	Peak	no limit
2	5285.0000	55.14	40.50	95.64	54.00	41.64	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

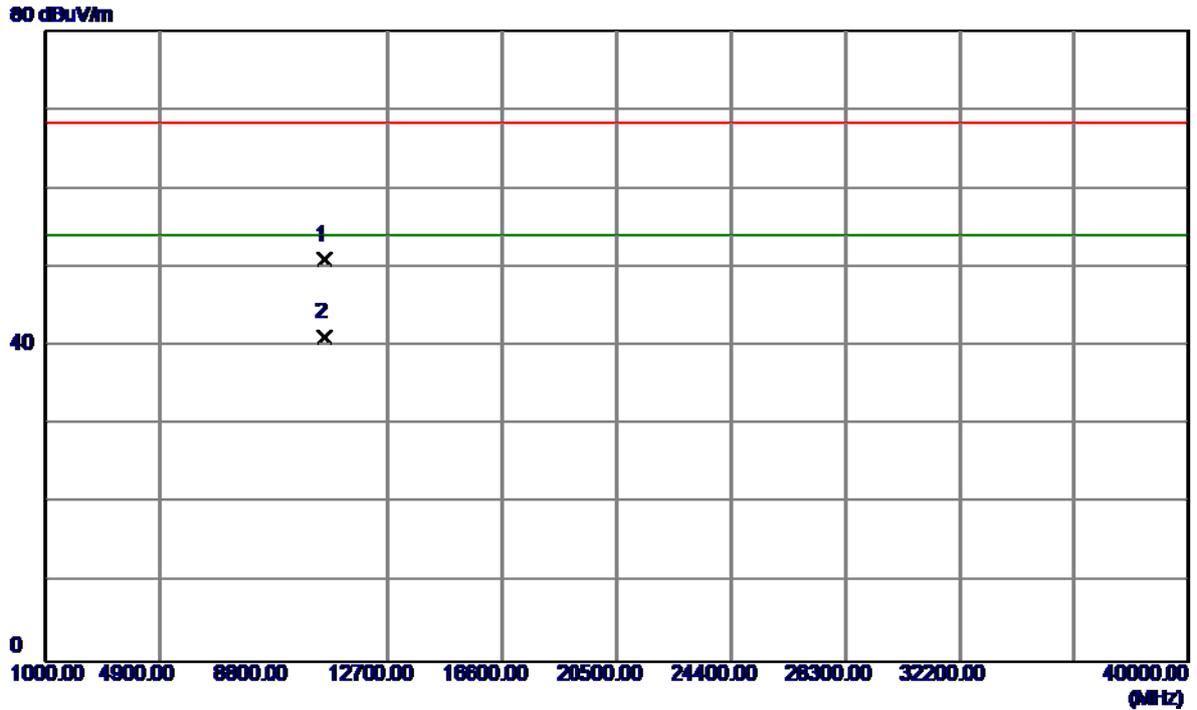


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10540.8800	37.12	13.84	50.96	68.30	-17.34	Peak	
2	10540.8800	27.22	13.84	41.06	54.00	-12.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical


123 dBuV/m

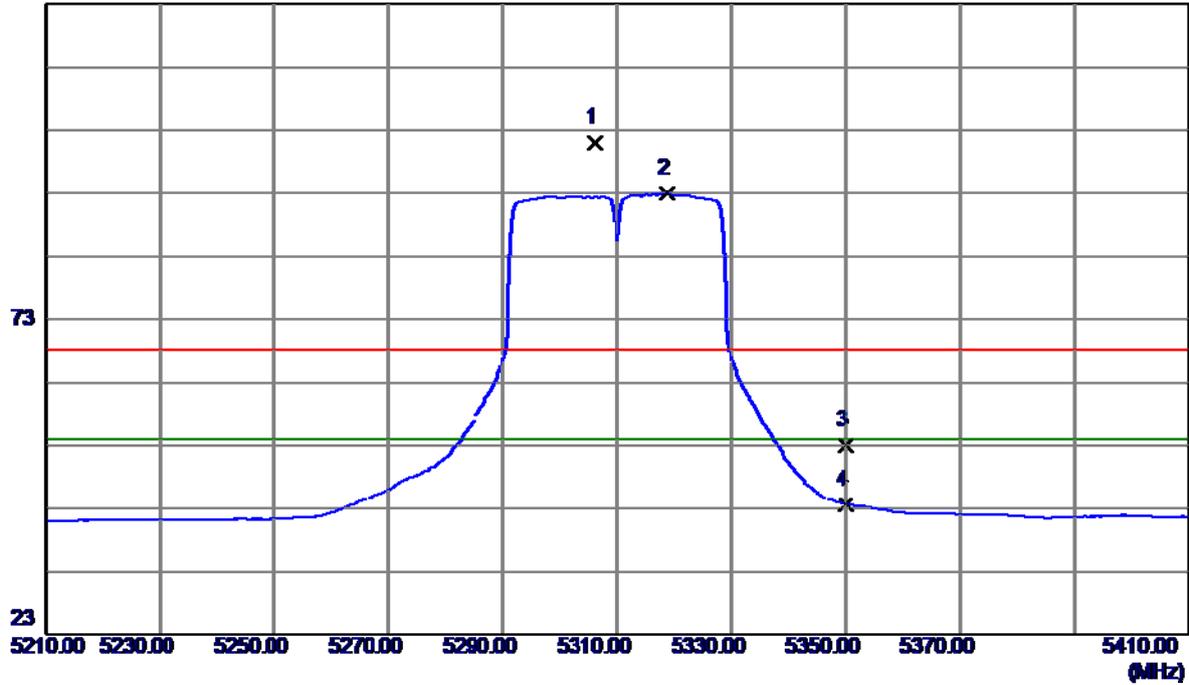

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5306.2000	60.47	40.55	101.02	68.30	32.72	Peak	no limit
2	5318.6000	52.35	40.58	92.93	54.00	38.93	AVG	no limit
3	5350.0000	12.45	40.64	53.09	68.30	-15.21	Peak	
4	5350.0000	3.00	40.64	43.64	54.00	-10.36	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

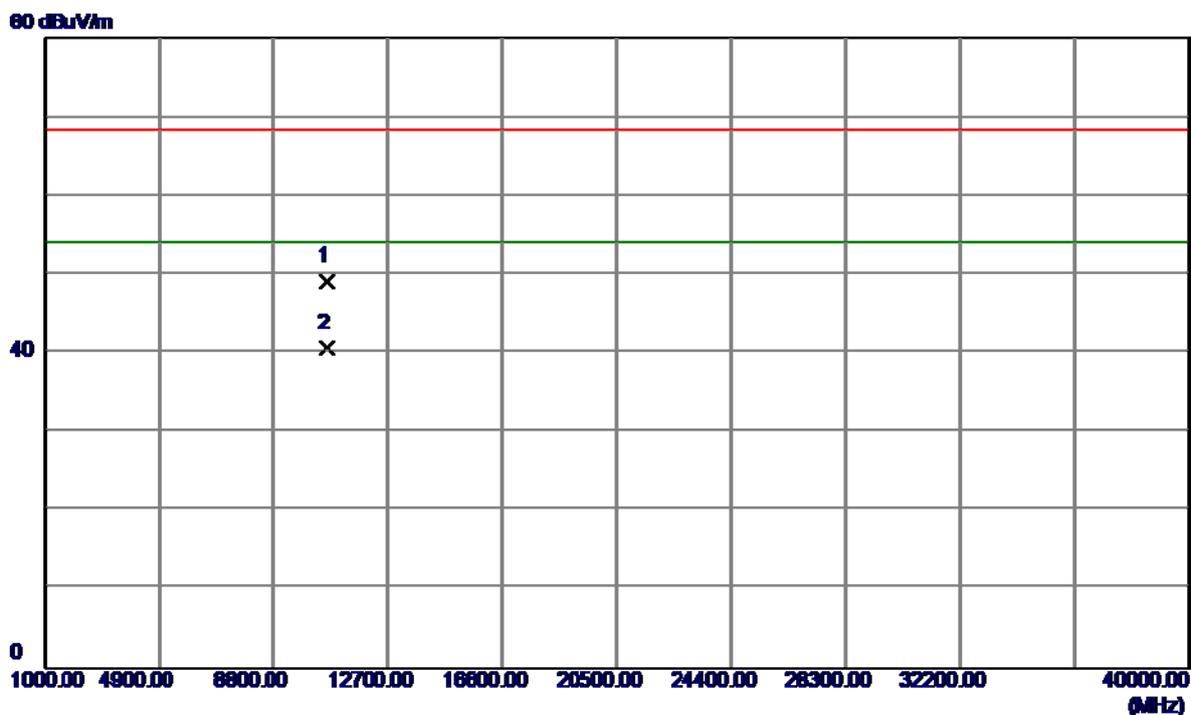

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10620.3300	34.88	14.17	49.05	68.30	-19.25	Peak	
2	10620.3300	26.49	14.17	40.66	54.00	-13.34	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

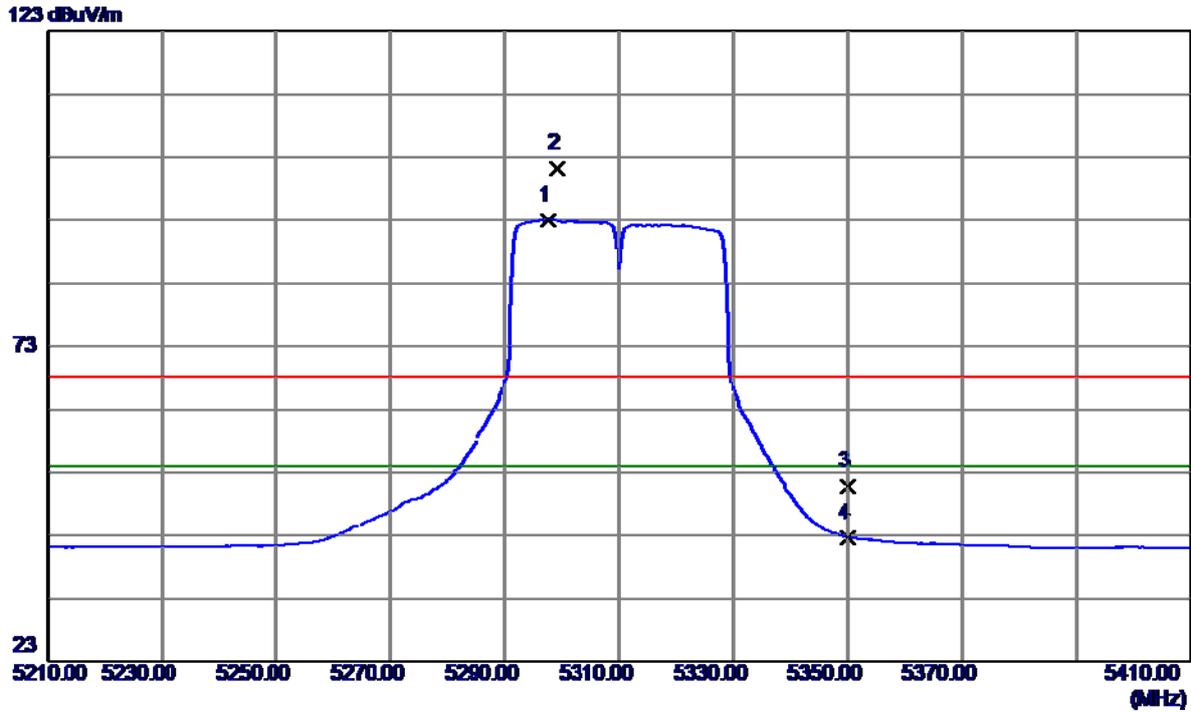

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5297.6000	52.56	40.53	93.09	54.00	39.09	AVG	no limit
2	5299.2000	60.59	40.53	101.12	68.30	32.82	Peak	no limit
3	5350.0000	10.16	40.64	50.80	68.30	-17.50	Peak	
4	5350.0000	2.05	40.64	42.69	54.00	-11.31	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

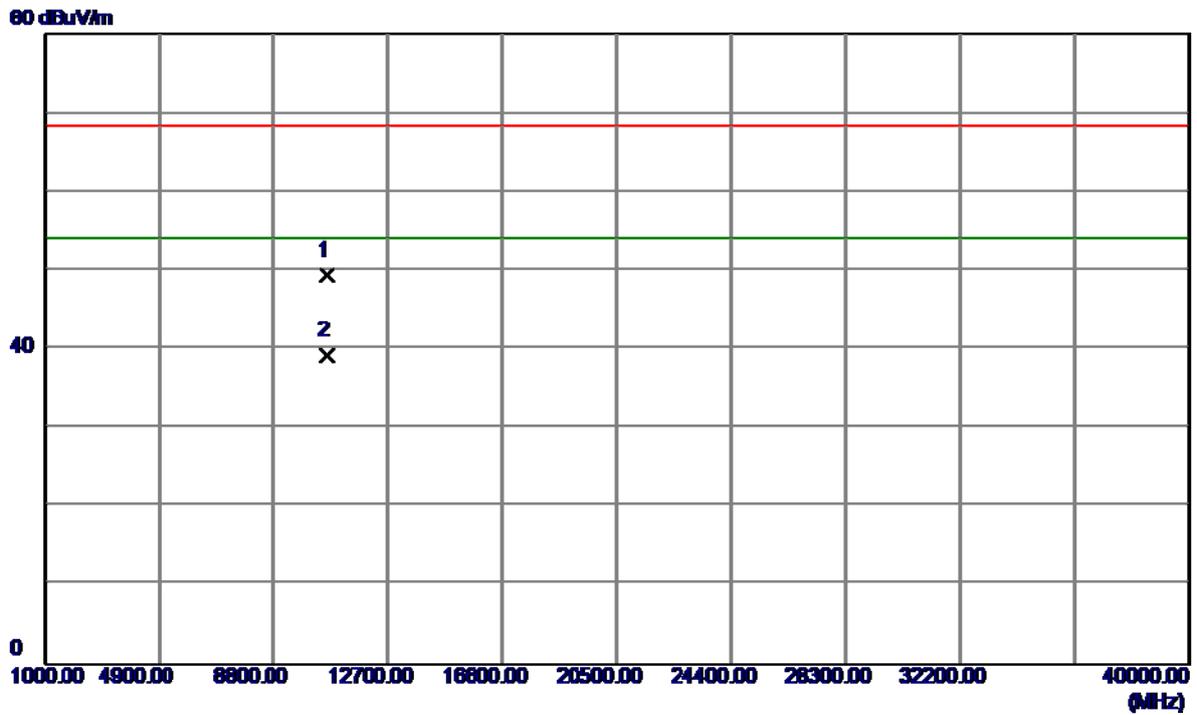

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10620.5800	35.19	14.17	49.36	68.30	-18.94	Peak	
2	10620.5800	25.10	14.17	39.27	54.00	-14.73	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

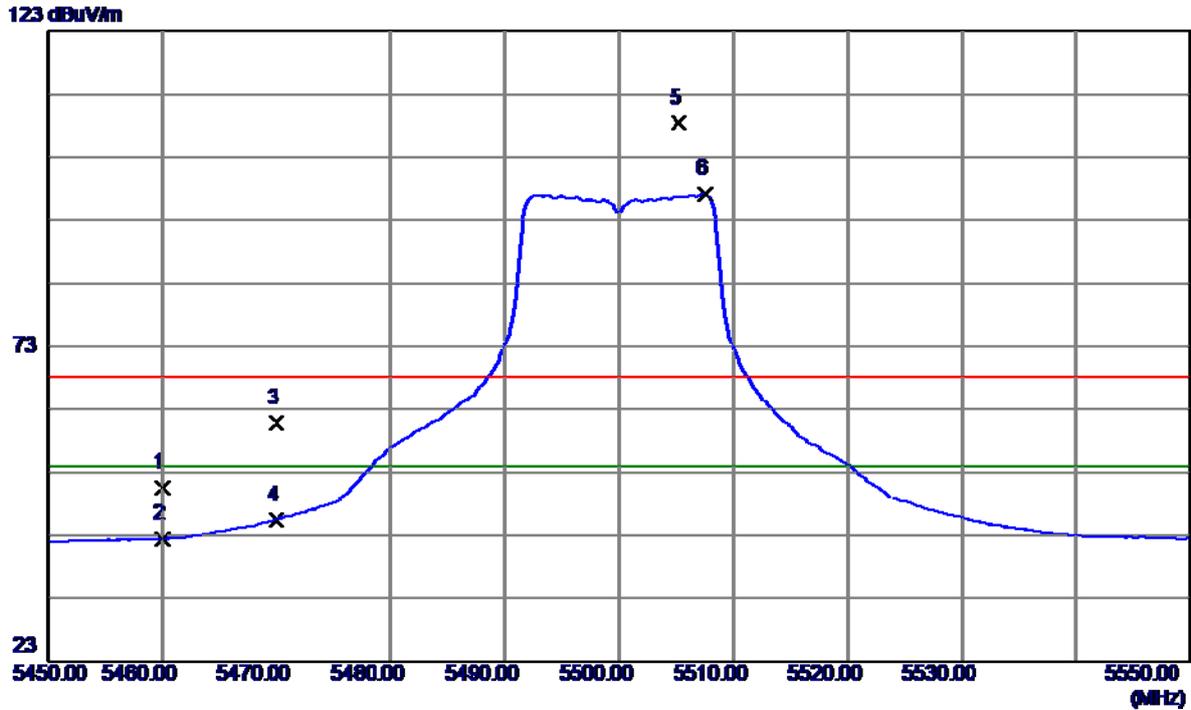

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	9.81	40.88	50.69	68.30	-17.61	Peak	
2	5460.0000	1.58	40.88	42.46	54.00	-11.54	AVG	
3	5470.0000	19.98	40.90	60.88	68.30	-7.42	Peak	
4	5470.0000	4.56	40.90	45.46	54.00	-8.54	AVG	
5	5505.2000	67.46	40.97	108.43	68.30	40.13	Peak	no limit
6	5507.6000	56.20	40.97	97.17	54.00	43.17	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

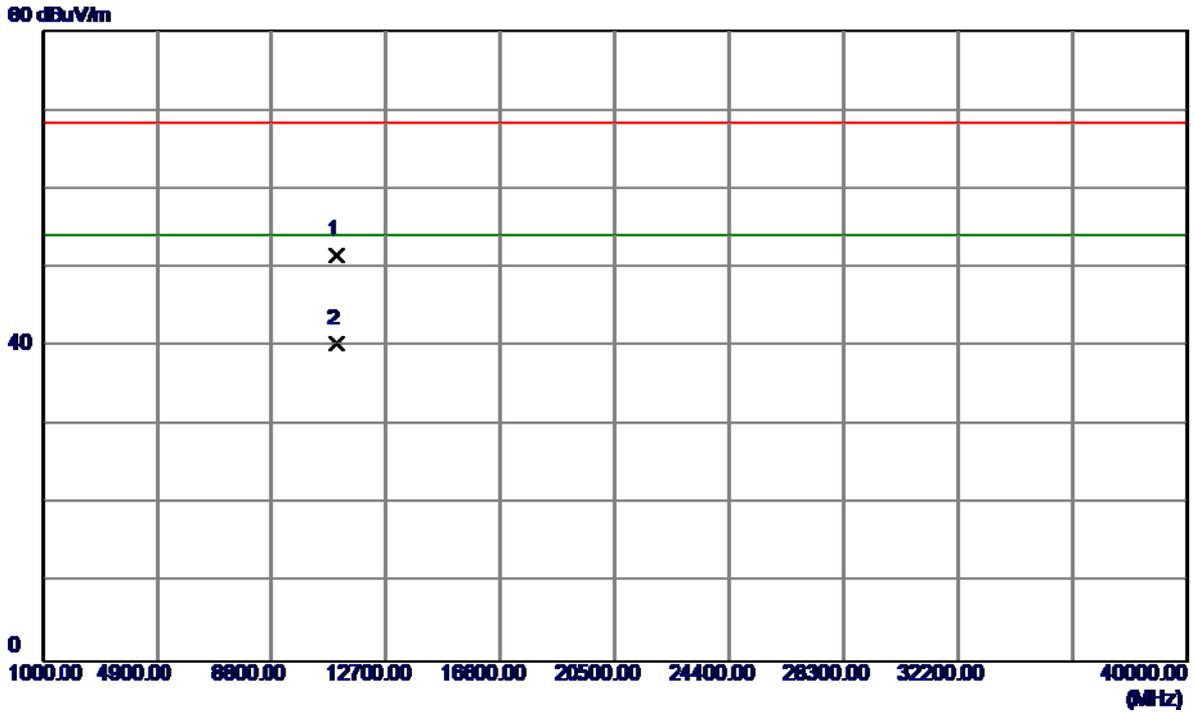


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11000.7600	35.80	15.75	51.55	68.30	-16.75	Peak	
2	11000.7600	24.53	15.75	40.28	54.00	-13.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal


123 dBuV/m

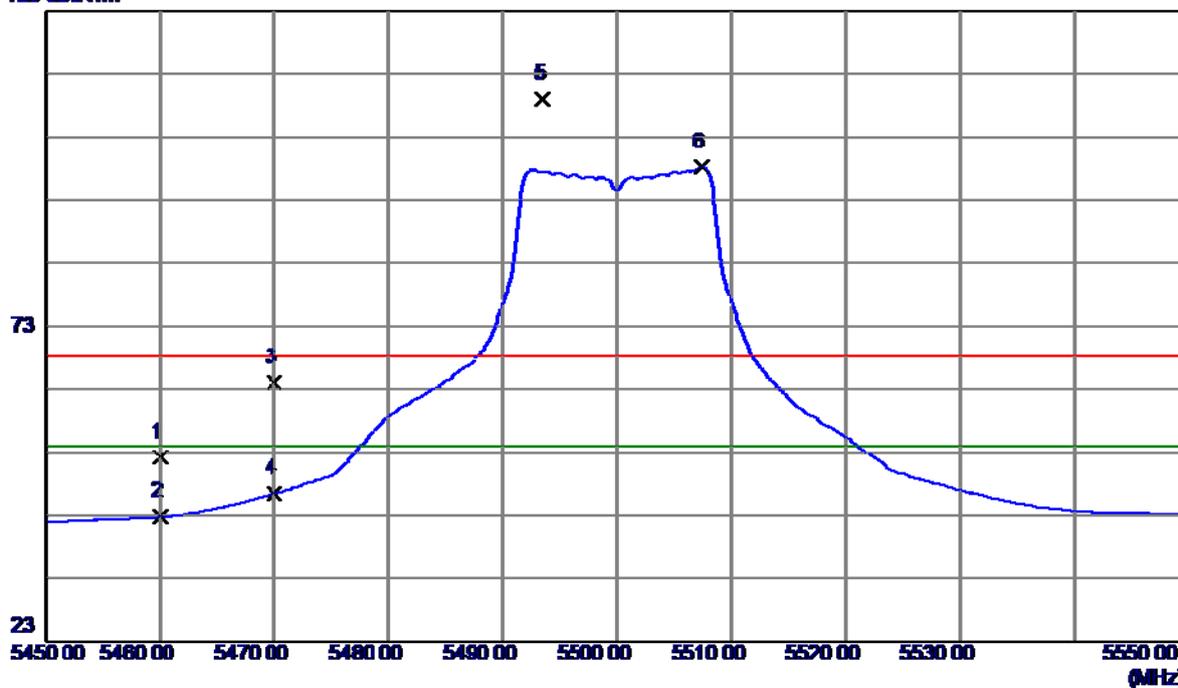

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	11.35	40.88	52.23	68.30	-16.07	Peak	
2	5460.0000	1.87	40.88	42.75	54.00	-11.25	AVG	
3	5470.0000	23.01	40.90	63.91	68.30	-4.39	Peak	
4	5470.0000	5.58	40.90	46.48	54.00	-7.52	AVG	
5	5493.5000	68.11	40.95	109.06	68.30	40.76	Peak	no limit
6	5507.4000	57.23	40.97	98.20	54.00	44.20	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

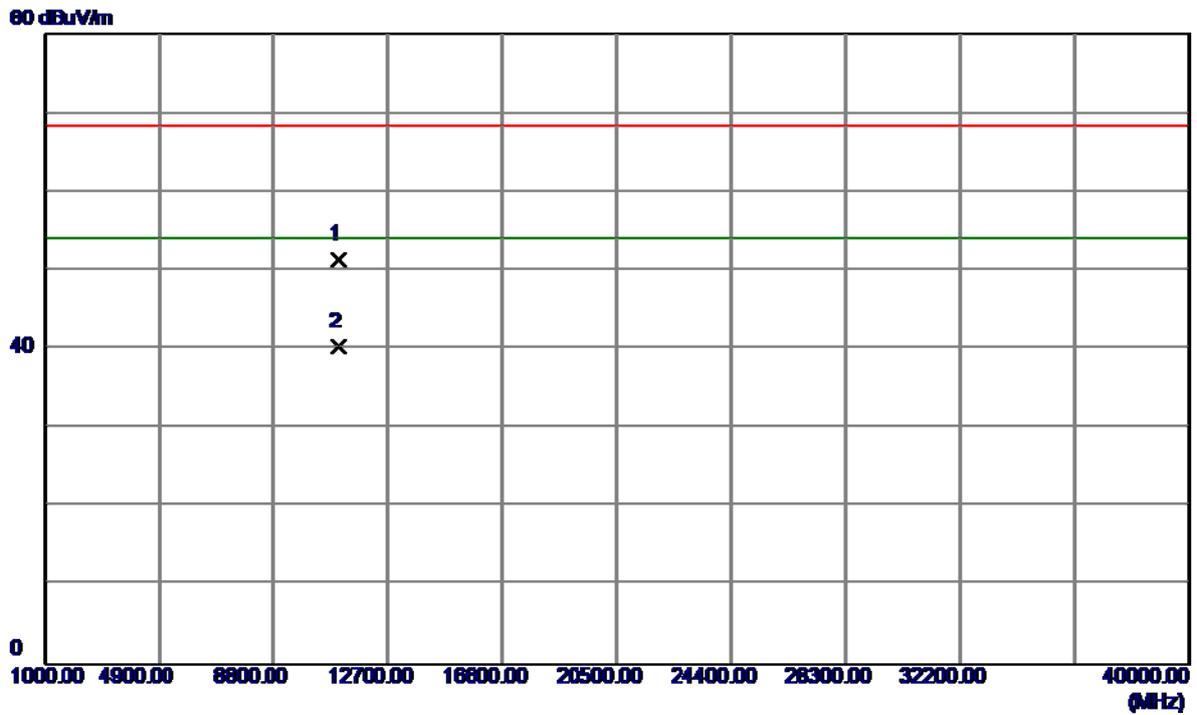

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11000.0199	35.58	15.75	51.33	68.30	-16.97	Peak	
2	11000.0199	24.53	15.75	40.28	54.00	-13.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Vertical

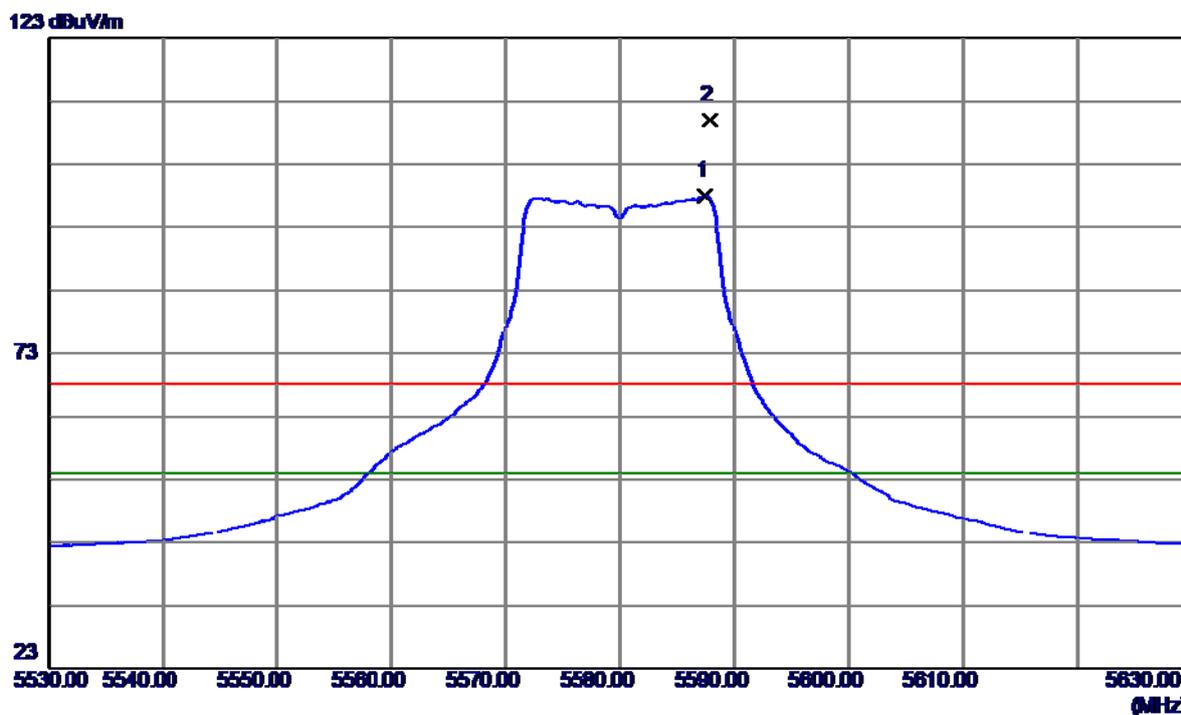

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5587.5000	56.92	41.08	98.00	54.00	44.00	AVG	no limit
2	5587.9000	68.93	41.08	110.01	68.30	41.71	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Vertical

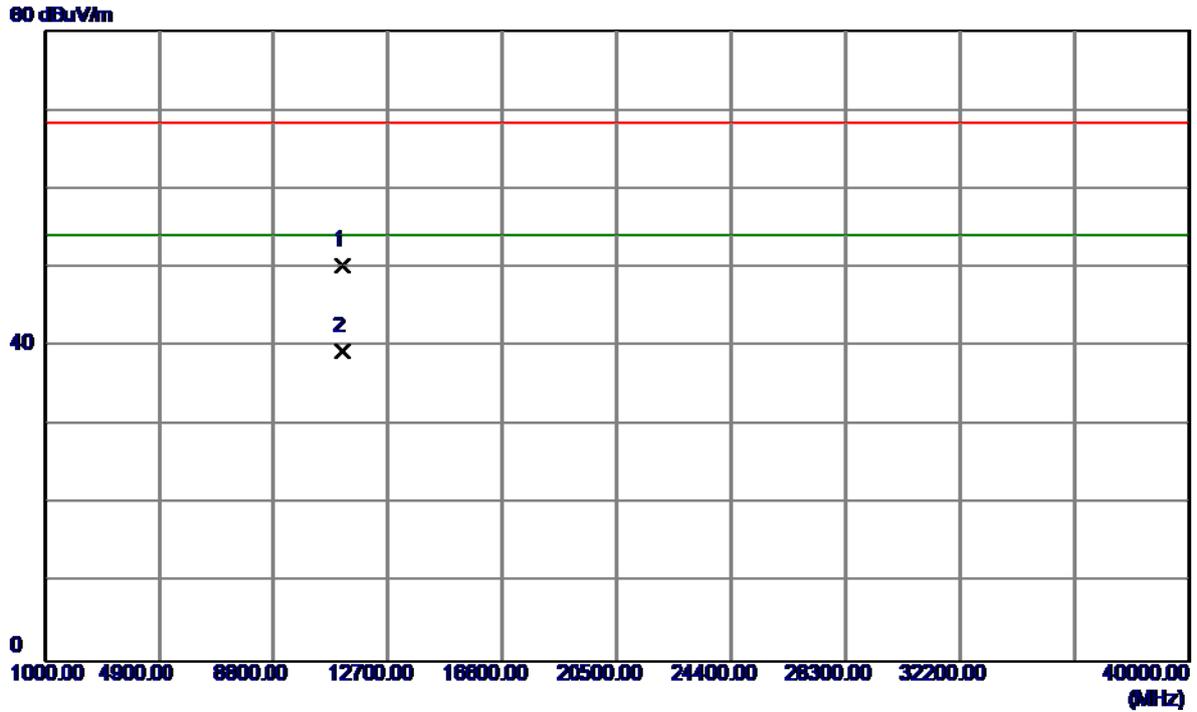

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11160.4100	34.10	16.13	50.23	68.30	-18.07	Peak	
2	11160.4100	23.23	16.13	39.36	54.00	-14.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Horizontal

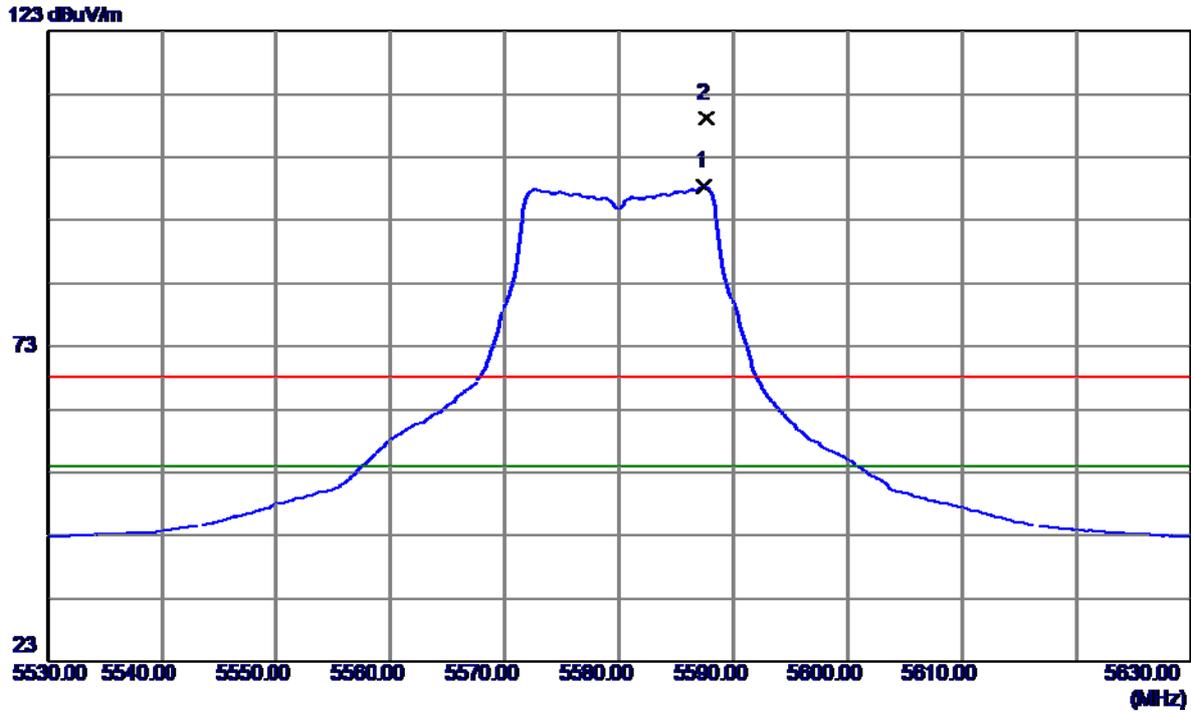

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5587.5000	57.35	41.08	98.43	54.00	44.43	AVG	no limit
2	5587.7000	68.05	41.08	109.13	68.30	40.83	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5580MHz


Horizontal

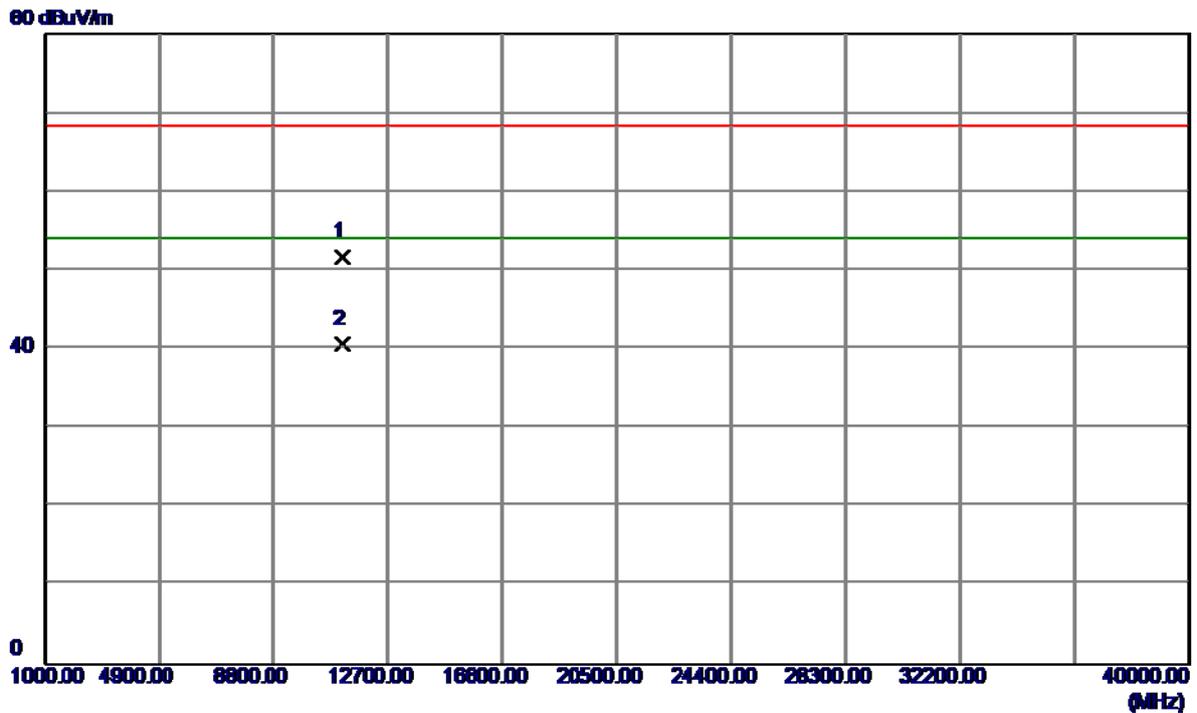

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11160.0300	35.63	16.13	51.76	68.30	-16.54	Peak	
2	11160.0300	24.53	16.13	40.66	54.00	-13.34	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

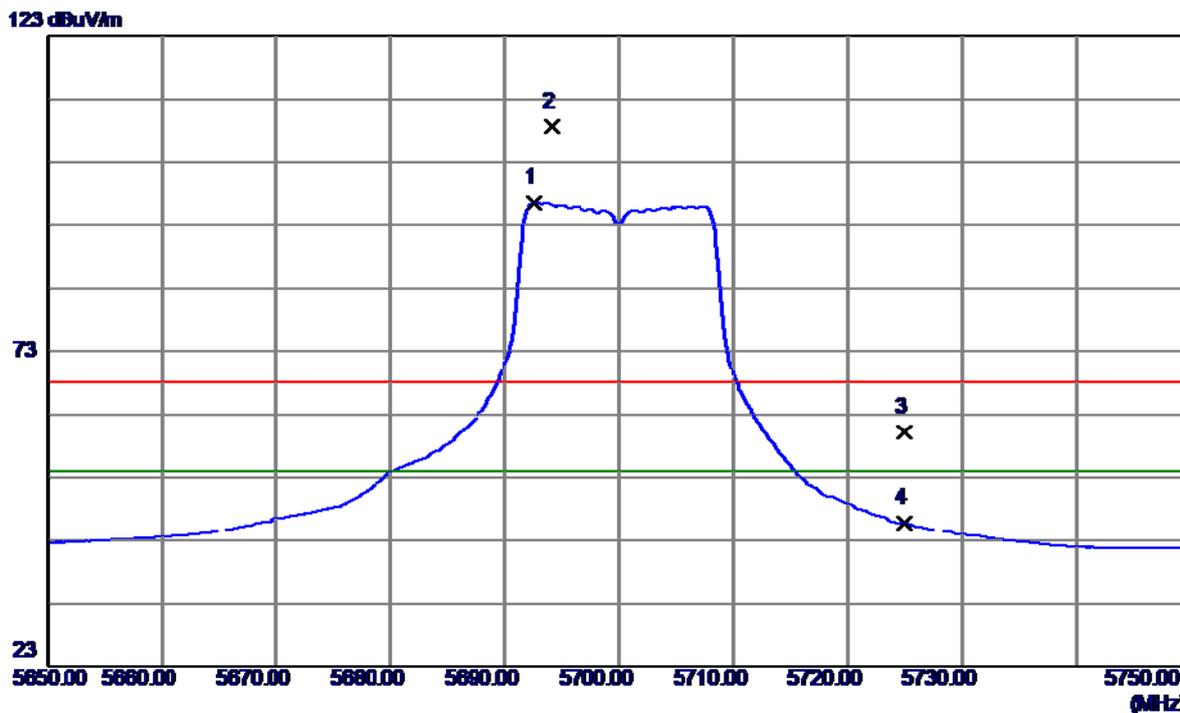

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5692.6000	55.46	41.22	96.68	54.00	42.68	AVG	no limit
2	5694.1000	67.35	41.22	108.57	68.30	40.27	Peak	no limit
3	5725.0000	18.99	41.27	60.26	68.30	-8.04	Peak	
4	5725.0000	4.54	41.27	45.81	54.00	-8.19	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

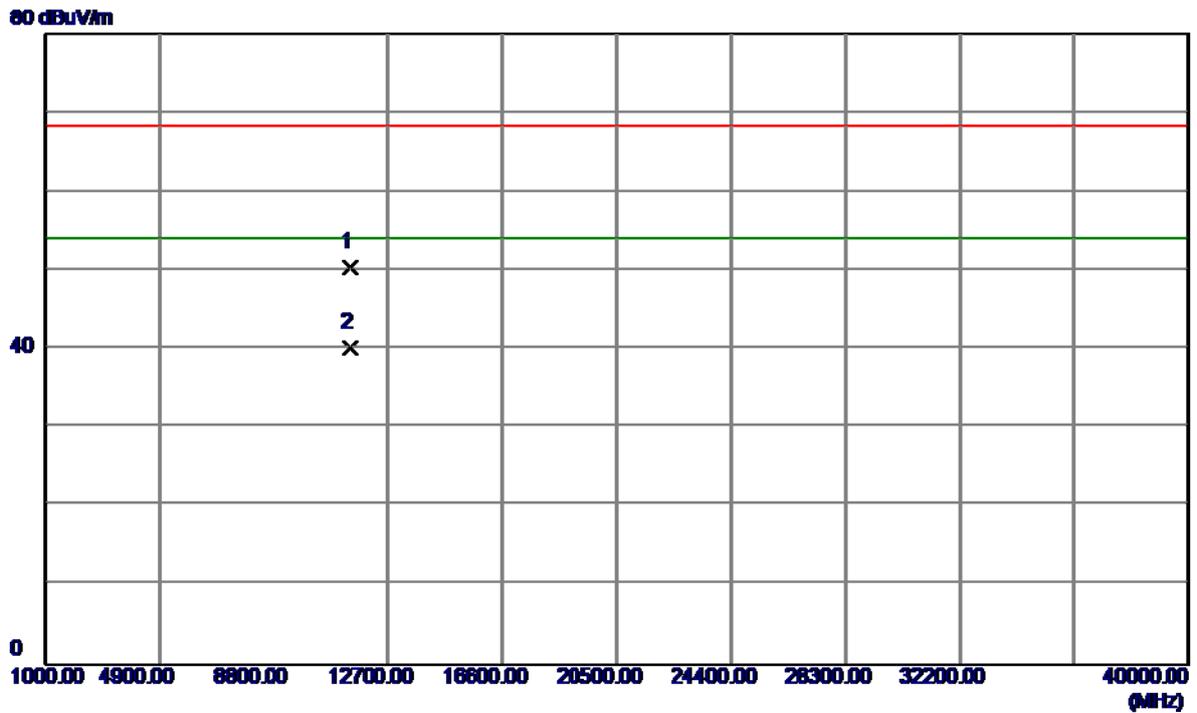

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.2500	33.64	16.70	50.34	68.30	-17.96	Peak	
2	11400.2500	23.49	16.70	40.19	54.00	-13.81	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

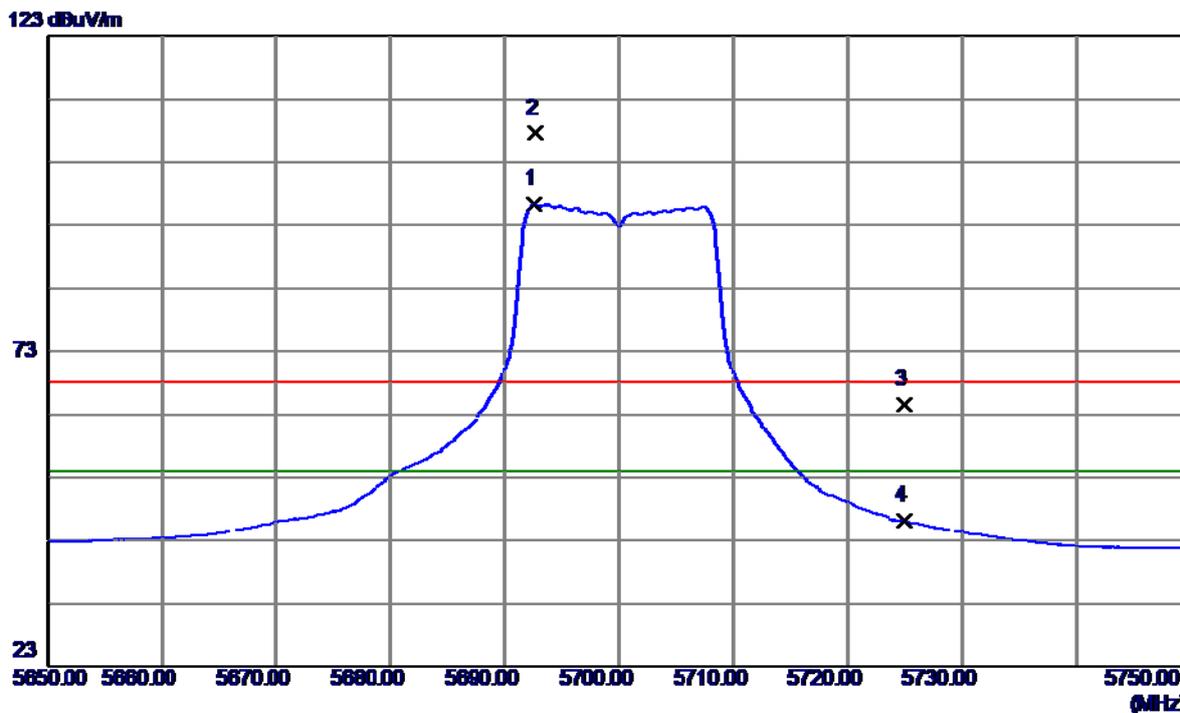

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5692.6000	55.26	41.22	96.48	54.00	42.48	AVG	no limit
2	5692.7000	66.34	41.22	107.56	68.30	39.26	Peak	no limit
3	5725.0000	23.31	41.27	64.58	68.30	-3.72	Peak	
4	5725.0000	4.88	41.27	46.15	54.00	-7.85	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

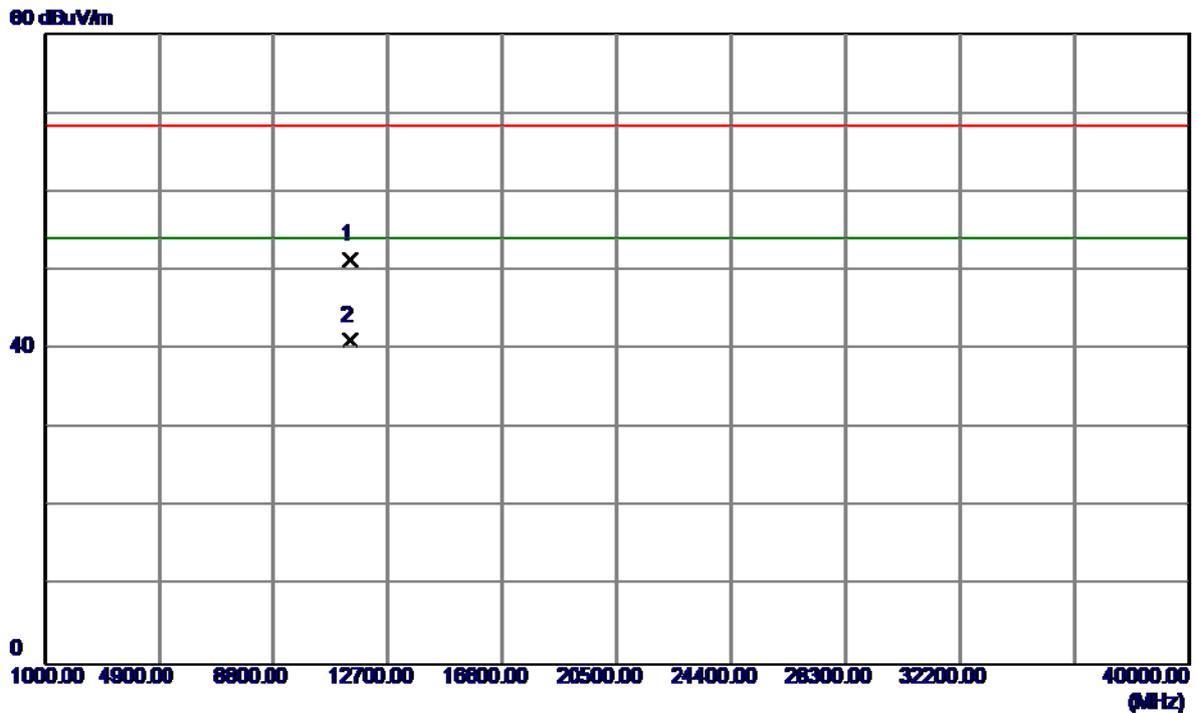


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.5800	34.61	16.70	51.31	68.30	-16.99	Peak	
2	11400.5800	24.39	16.70	41.09	54.00	-12.91	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical


123 dBuV/m

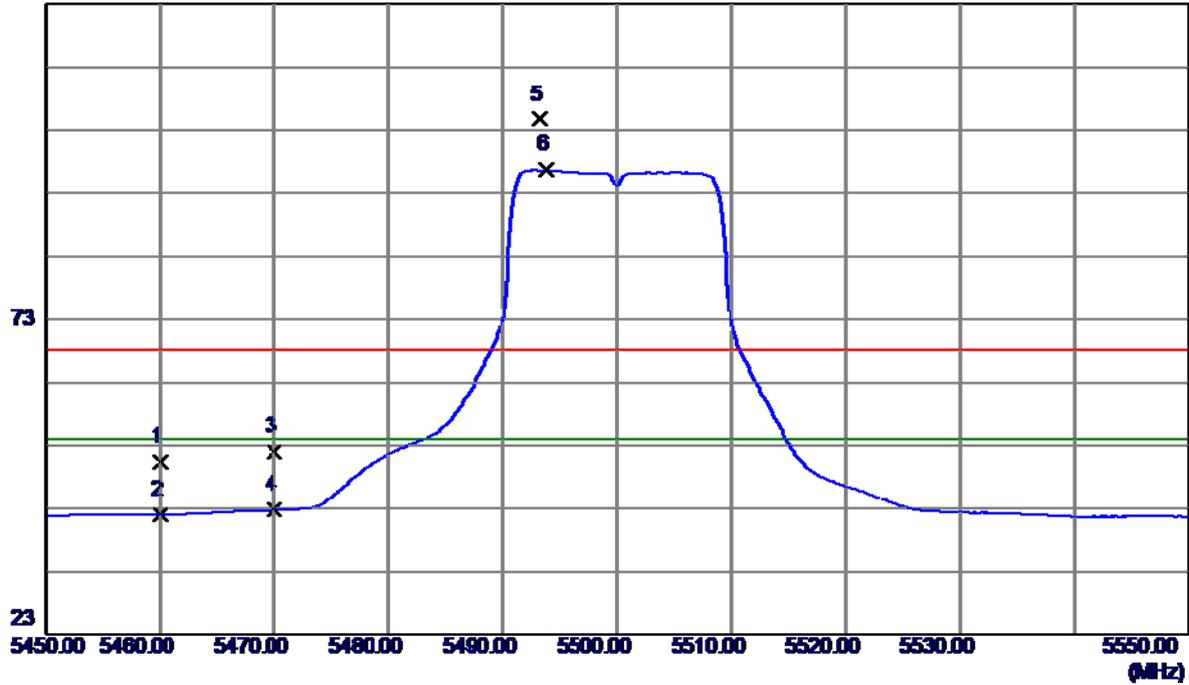

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	9.50	40.88	50.38	68.30	-17.92	Peak	
2	5460.0000	1.07	40.88	41.95	54.00	-12.05	AVG	
3	5470.0000	11.07	40.90	51.97	68.30	-16.33	Peak	
4	5470.0000	1.82	40.90	42.72	54.00	-11.28	AVG	
5	5493.2000	63.75	40.95	104.70	68.30	36.40	Peak	no limit
6	5493.8000	55.78	40.95	96.73	54.00	42.73	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

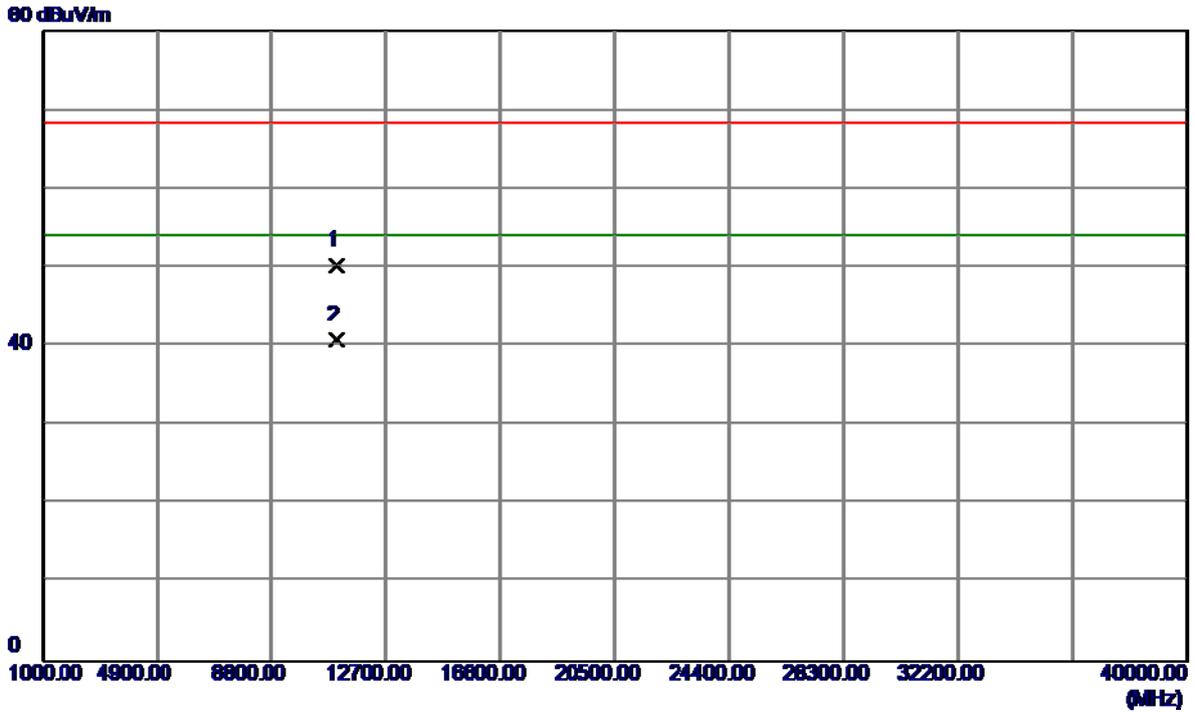

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11000.3900	34.54	15.75	50.29	68.30	-18.01	Peak	
2	11000.3900	24.98	15.75	40.73	54.00	-13.27	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

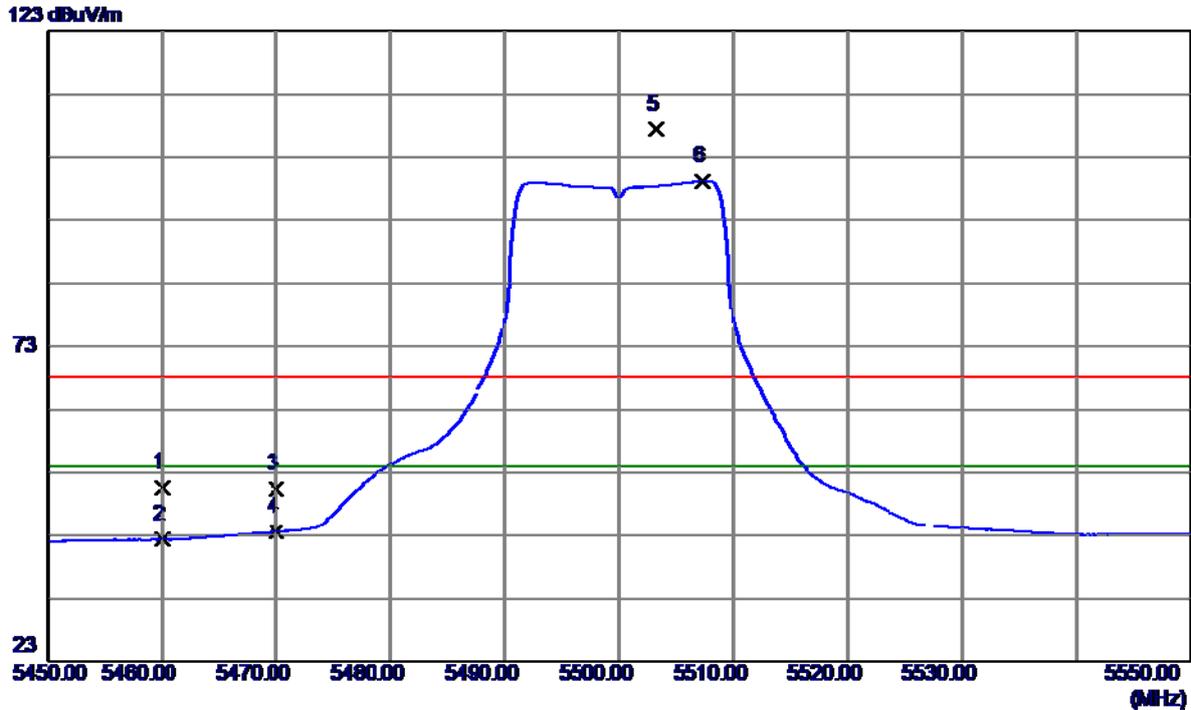

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	9.76	40.88	50.64	68.30	-17.66	Peak	
2	5460.0000	1.44	40.88	42.32	54.00	-11.68	AVG	
3	5470.0000	9.42	40.90	50.32	68.30	-17.98	Peak	
4	5470.0000	2.71	40.90	43.61	54.00	-10.39	AVG	
5	5503.2000	66.46	40.96	107.42	68.30	39.12	Peak	no limit
6	5507.3000	58.28	40.97	99.25	54.00	45.25	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

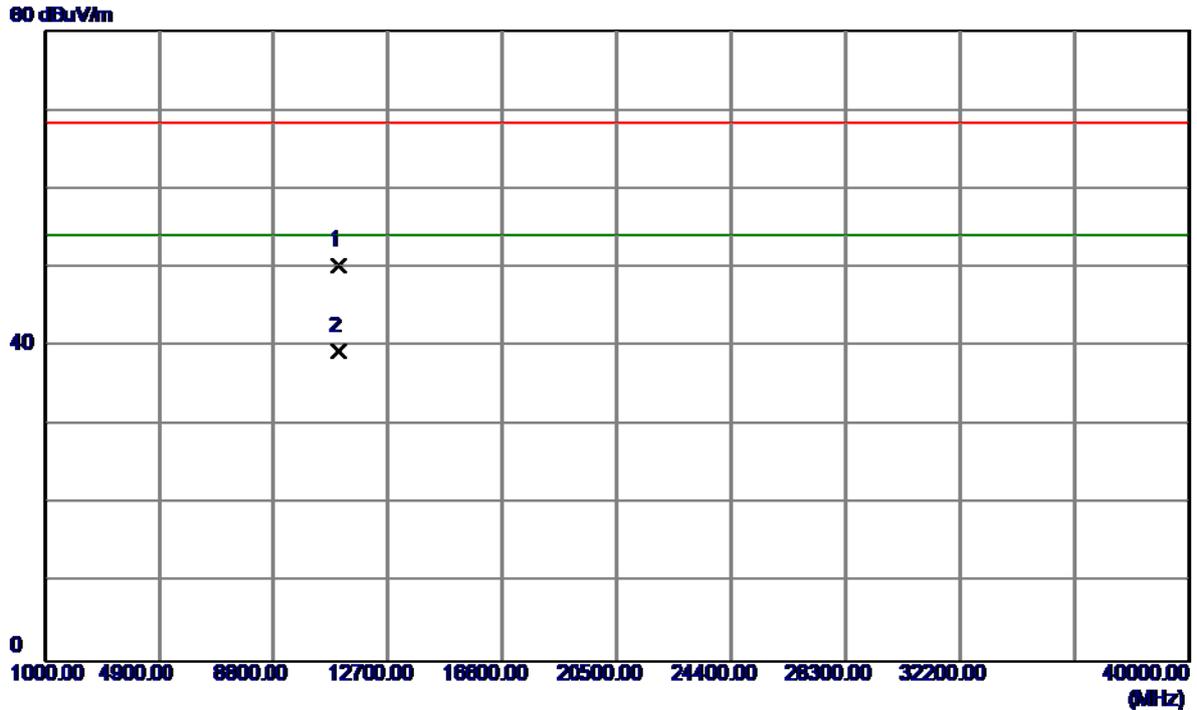

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11000.0800	34.53	15.75	50.28	68.30	-18.02	Peak	
2	11000.0800	23.63	15.75	39.38	54.00	-14.62	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Vertical

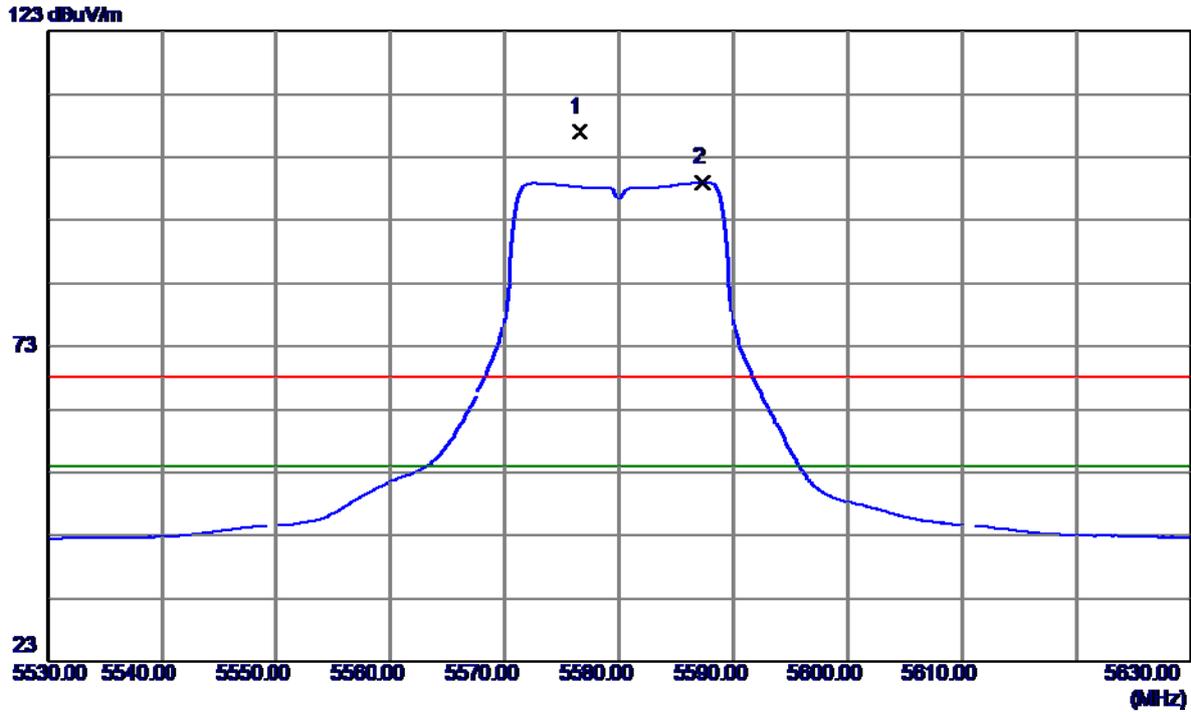

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5576.5000	65.96	41.06	107.02	68.30	38.72	Peak	no limit
2	5587.3000	57.97	41.08	99.05	54.00	45.05	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Vertical

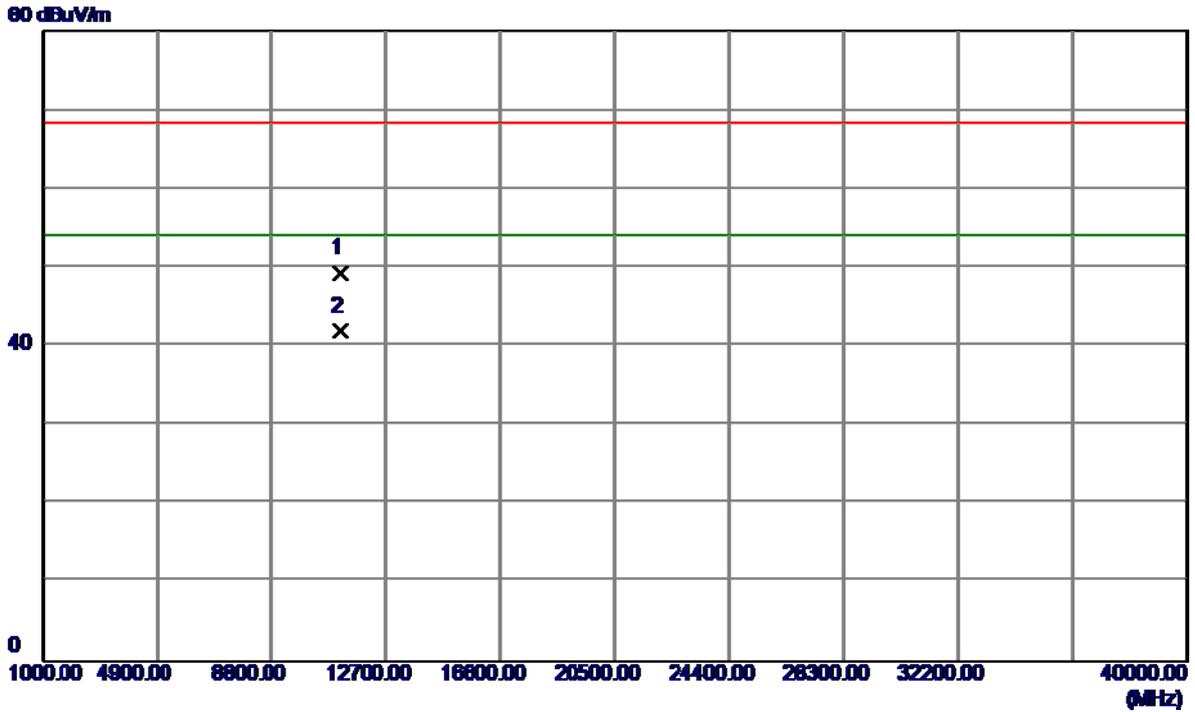

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11159.3400	33.13	16.13	49.26	68.30	-19.04	Peak	
2	11159.3400	25.72	16.13	41.85	54.00	-12.15	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz


Horizontal

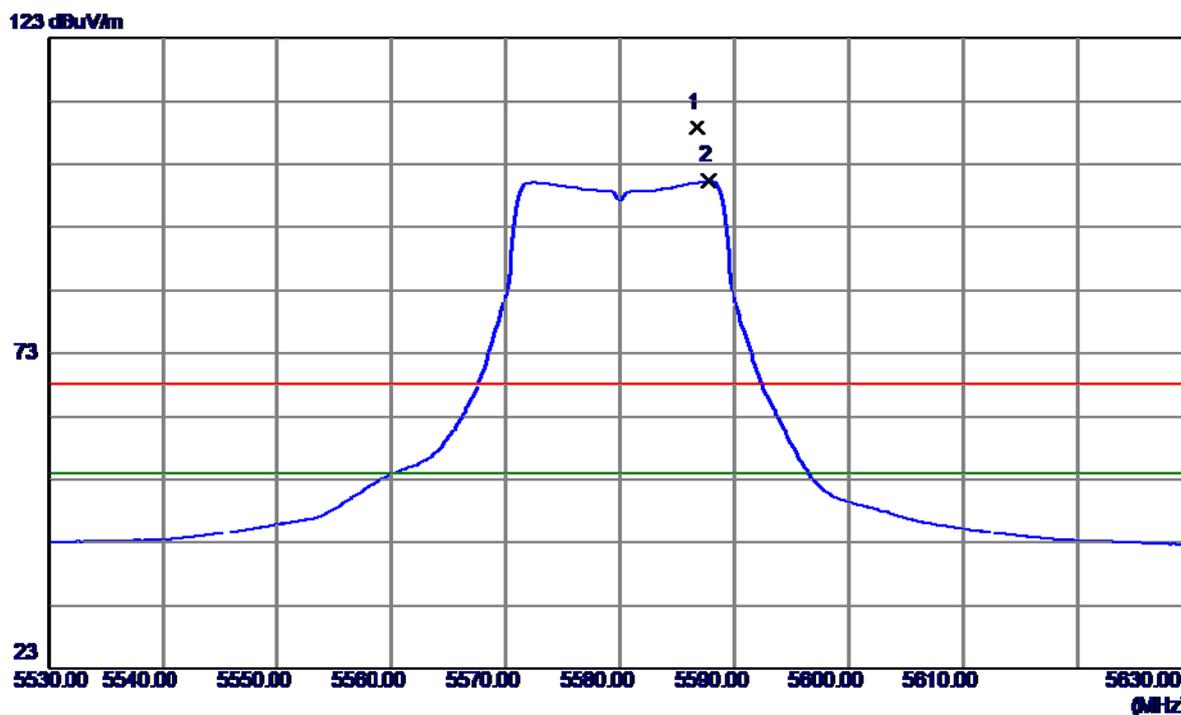

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5586.8000	67.65	41.08	108.73	68.30	40.43	Peak	no limit
2	5587.8000	59.25	41.08	100.33	54.00	46.33	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5580MHz

Horizontal

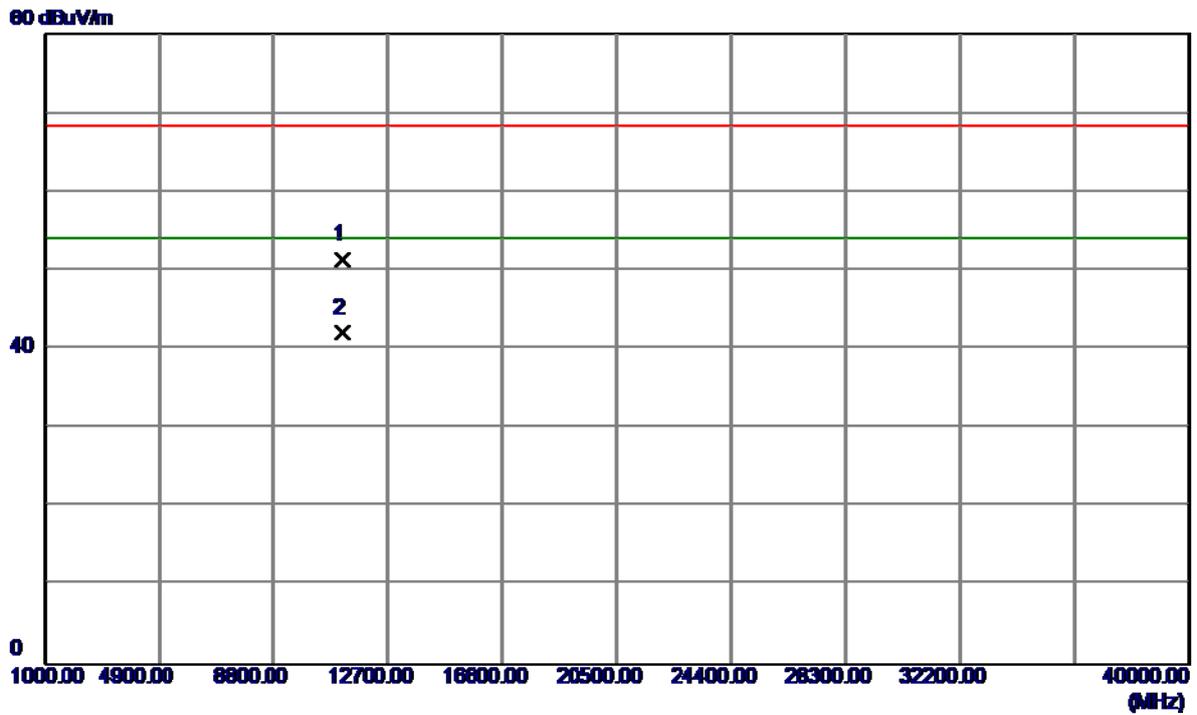


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11160.0199	35.24	16.13	51.37	68.30	-16.93	Peak	
2	11160.0199	25.95	16.13	42.08	54.00	-11.92	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical


123 dBuV/m

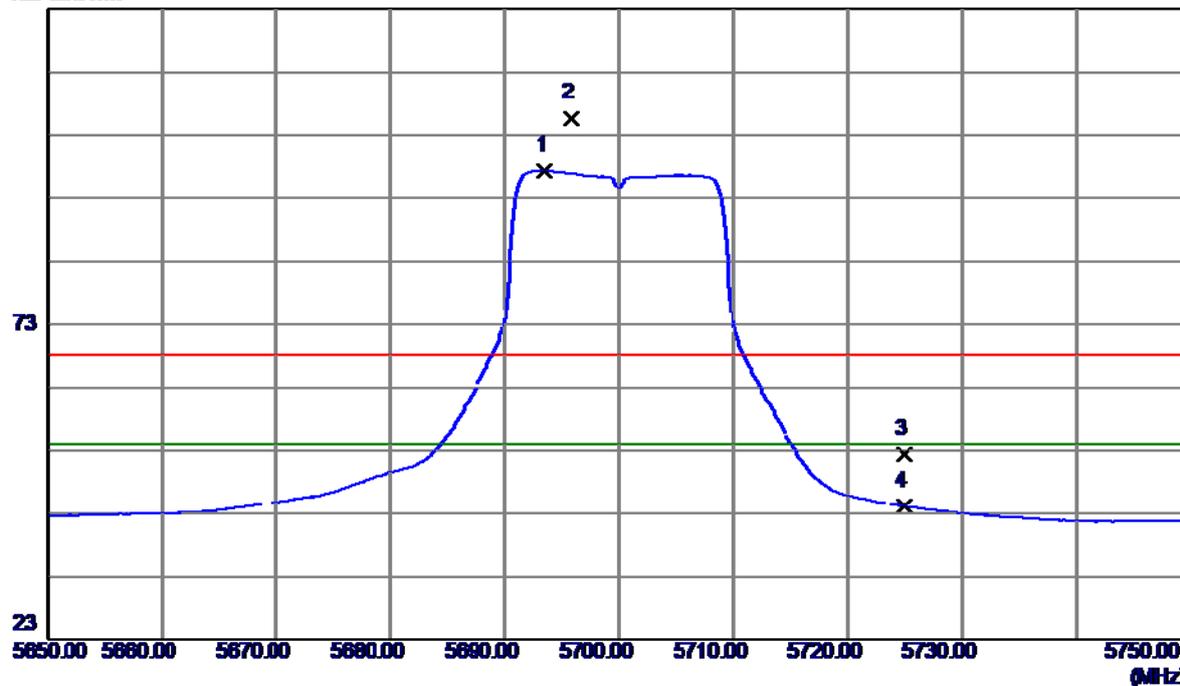

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5693.5000	56.20	41.22	97.42	54.00	43.42	AVG	no limit
2	5695.8000	64.47	41.23	105.70	68.30	37.40	Peak	no limit
3	5725.0000	11.05	41.27	52.32	68.30	-15.98	Peak	
4	5725.0000	2.90	41.27	44.17	54.00	-9.83	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

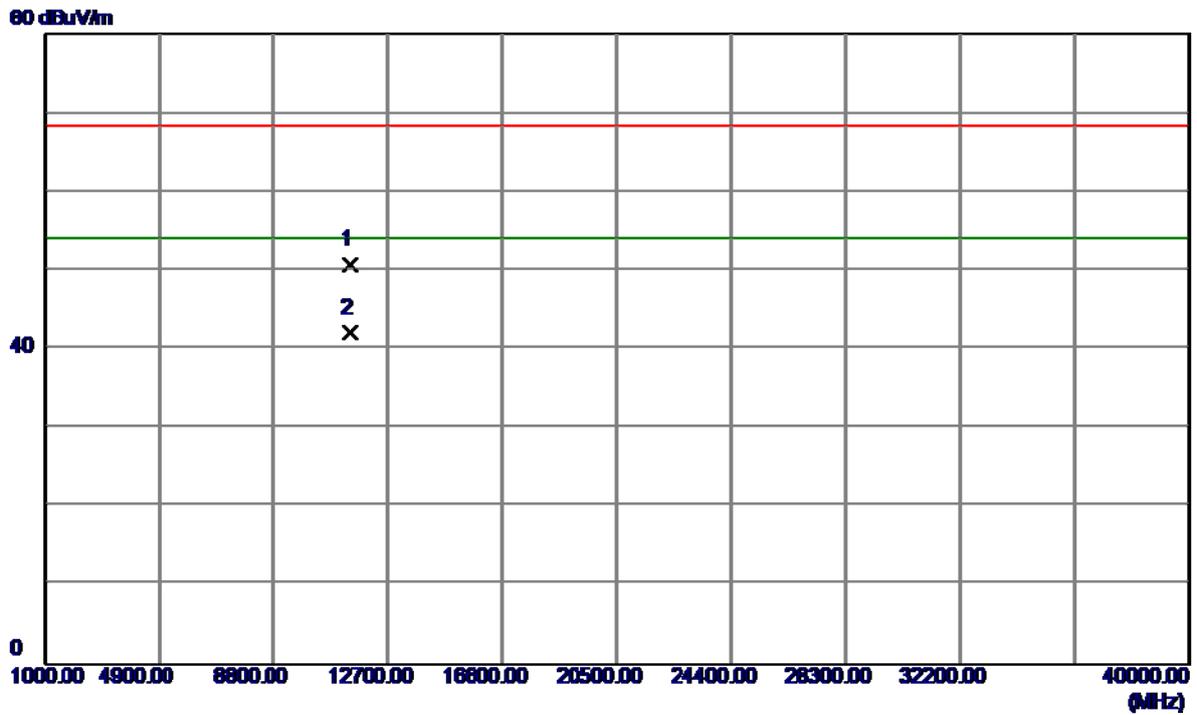

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.1800	33.96	16.70	50.66	68.30	-17.64	Peak	
2	11400.1800	25.33	16.70	42.03	54.00	-11.97	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

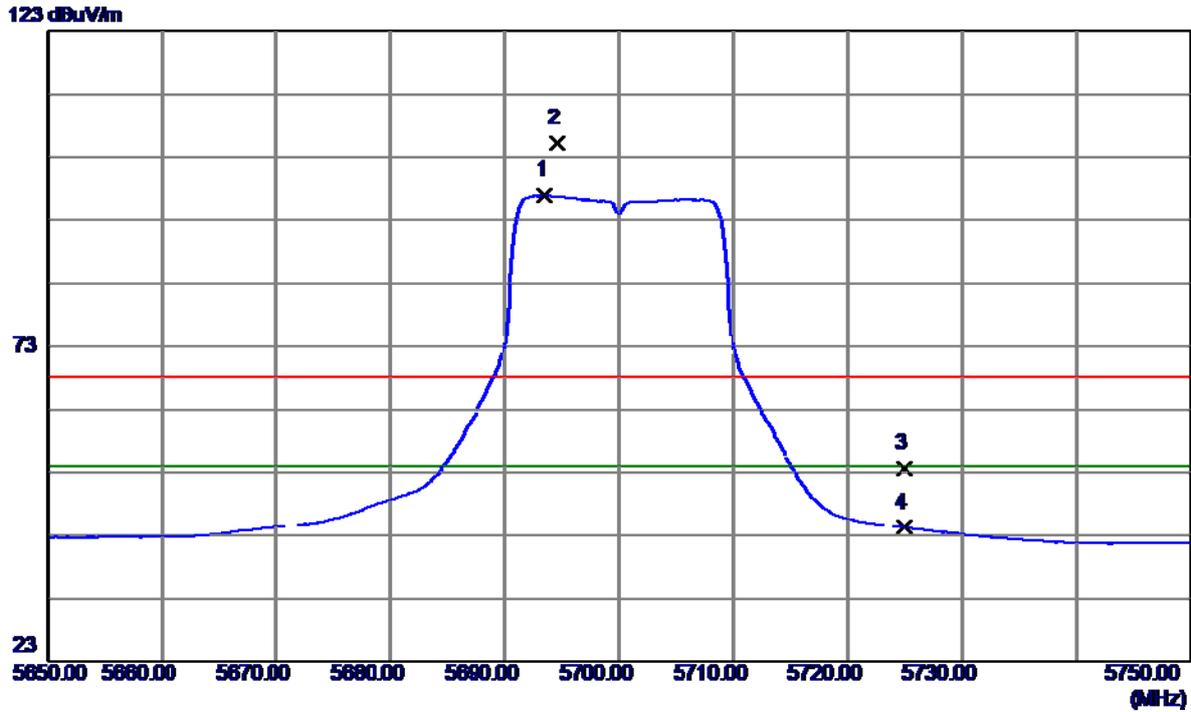

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5693.5000	55.71	41.22	96.93	54.00	42.93	AVG	no limit
2	5694.6000	63.93	41.22	105.15	68.30	36.85	Peak	no limit
3	5725.0000	12.24	41.27	53.51	68.30	-14.79	Peak	
4	5725.0000	3.03	41.27	44.30	54.00	-9.70	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

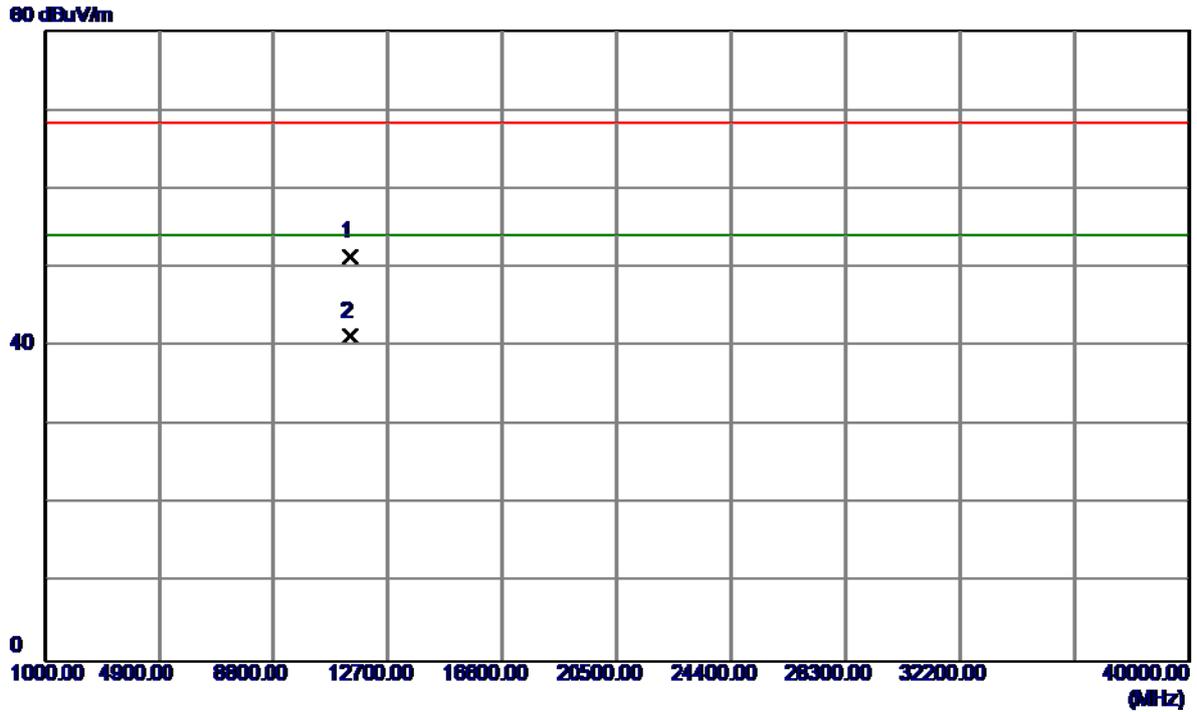

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.8099	34.67	16.70	51.37	68.30	-16.93	Peak	
2	11400.8099	24.63	16.70	41.33	54.00	-12.67	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Vertical

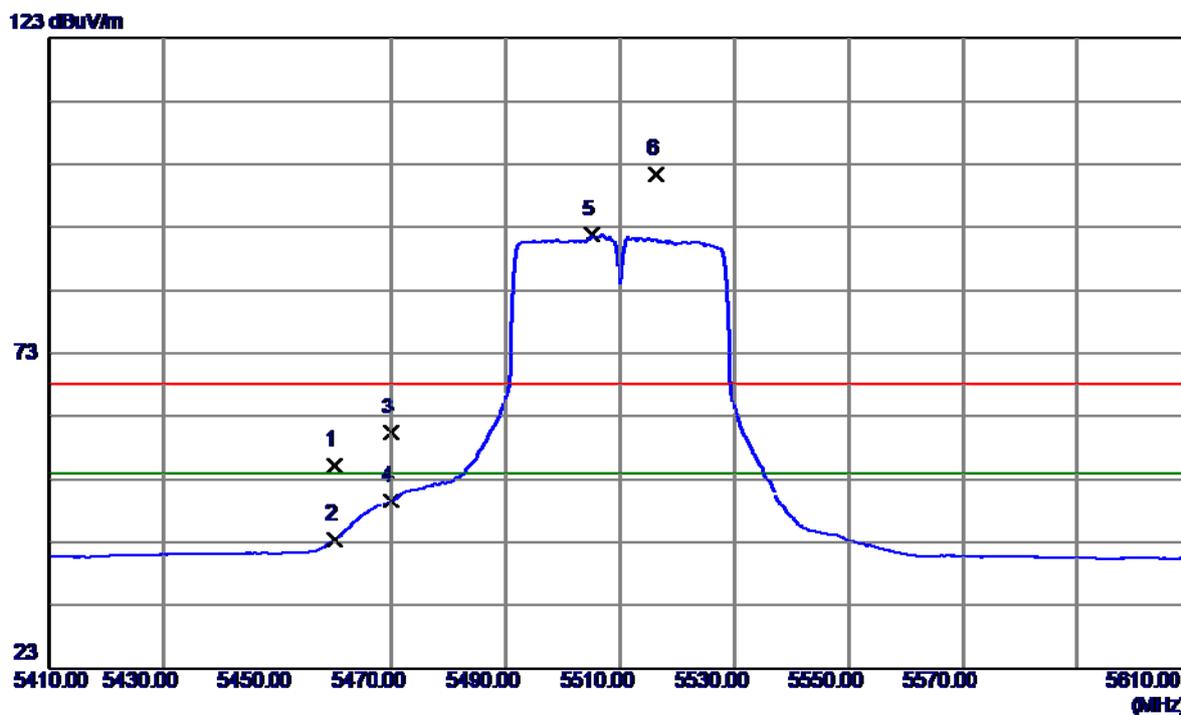

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	14.36	40.88	55.24	68.30	-13.06	Peak	
2	5460.0000	2.59	40.88	43.47	54.00	-10.53	AVG	
3	5470.0000	19.45	40.90	60.35	68.30	-7.95	Peak	
4	5470.0000	8.72	40.90	49.62	54.00	-4.38	AVG	
5	5505.2000	50.90	40.97	91.87	54.00	37.87	AVG	no limit
6	5516.2000	60.37	40.98	101.35	68.30	33.05	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Vertical

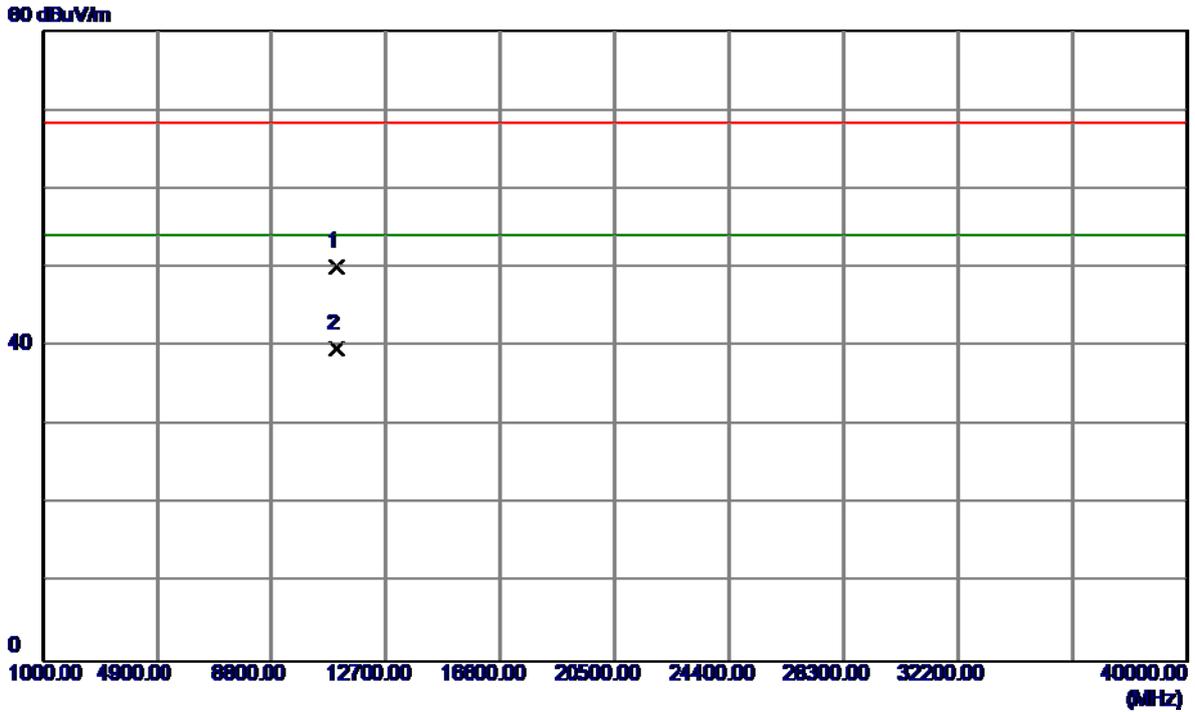

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11021.3400	34.23	15.80	50.03	68.30	-18.27	Peak	
2	11021.3400	23.88	15.80	39.68	54.00	-14.32	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Horizontal

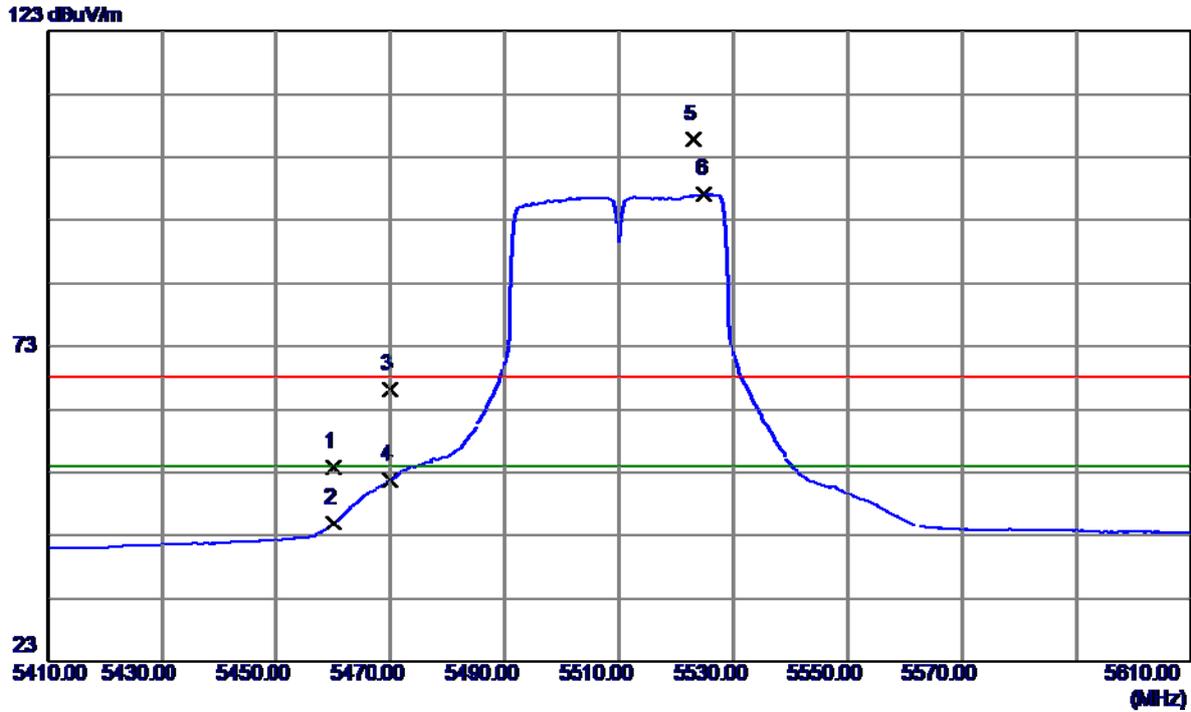

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	12.96	40.88	53.84	68.30	-14.46	Peak	
2	5460.0000	4.11	40.88	44.99	54.00	-9.01	AVG	
3	5470.0000	25.22	40.90	66.12	68.30	-2.18	Peak	
4	5470.0000	10.84	40.90	51.74	54.00	-2.26	AVG	
5	5523.2000	64.84	40.99	105.83	68.30	37.53	Peak	no limit
6	5525.0000	56.19	40.99	97.18	54.00	43.18	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz


Horizontal

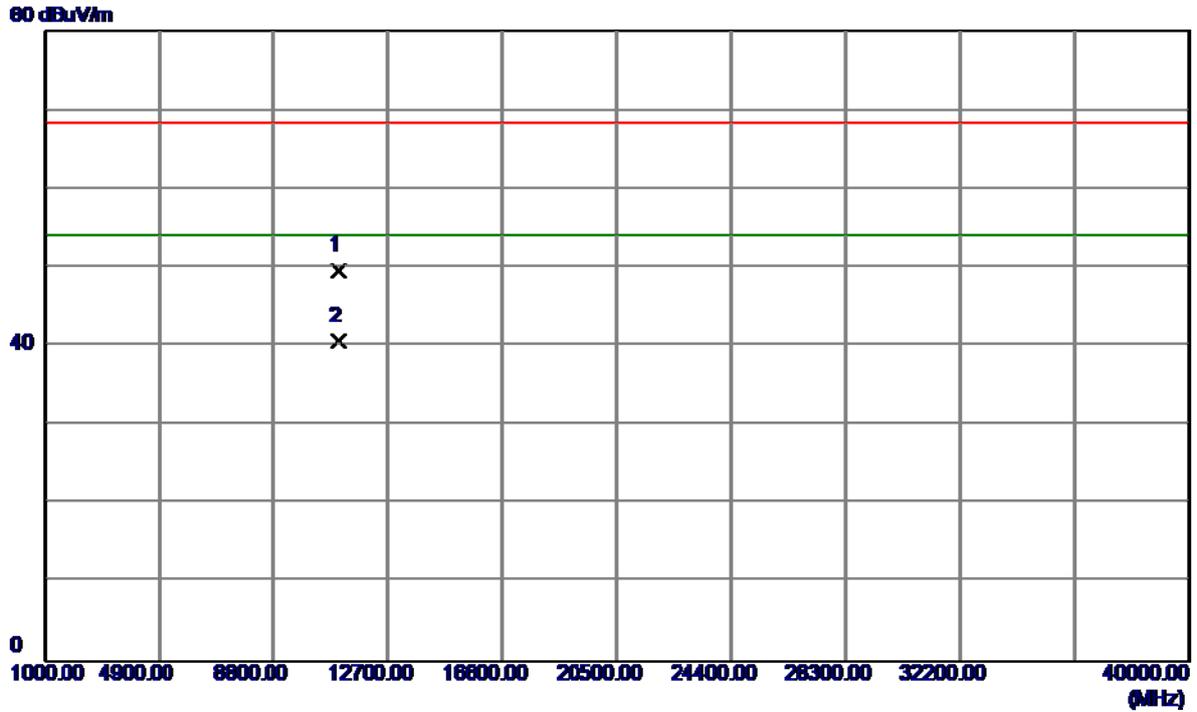

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11021.3400	33.81	15.80	49.61	68.30	-18.69	Peak	
2	11021.3400	24.88	15.80	40.68	54.00	-13.32	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz


Vertical

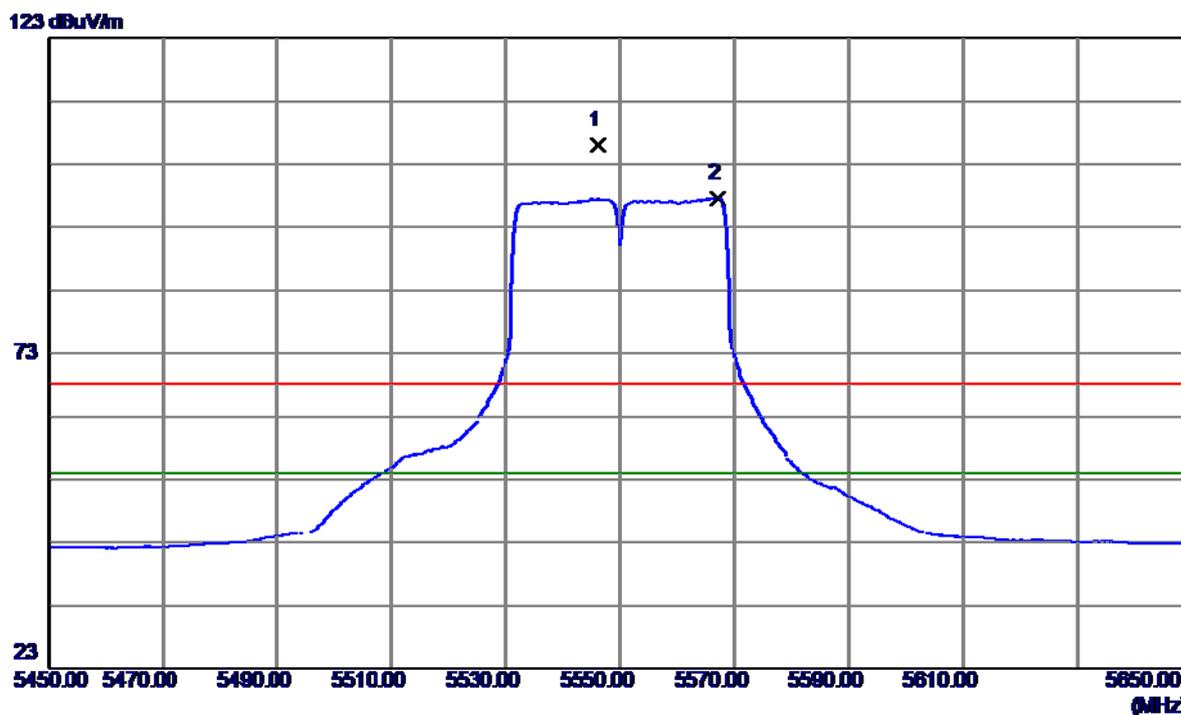

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5546.2000	64.92	41.02	105.94	68.30	37.64	Peak	no limit
2	5567.2000	56.59	41.05	97.64	54.00	43.64	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz


Vertical

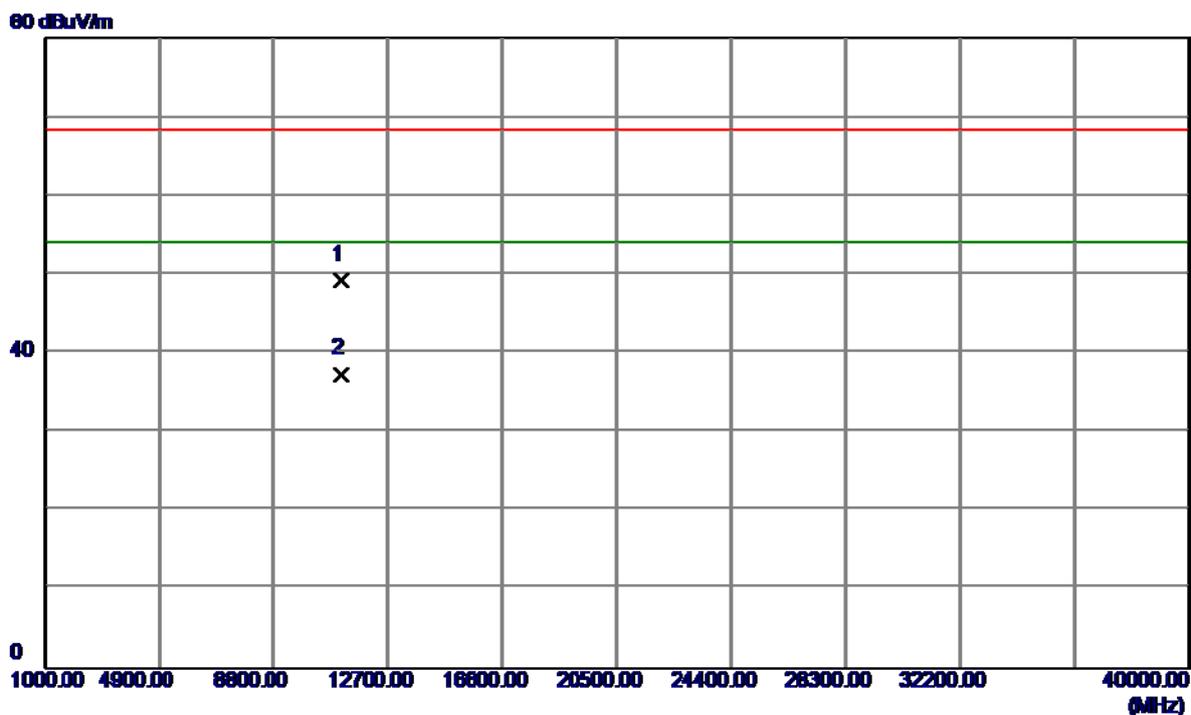

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11100.3800	33.36	15.99	49.35	68.30	-18.95	Peak	
2	11100.3800	21.37	15.99	37.36	54.00	-16.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz


Horizontal

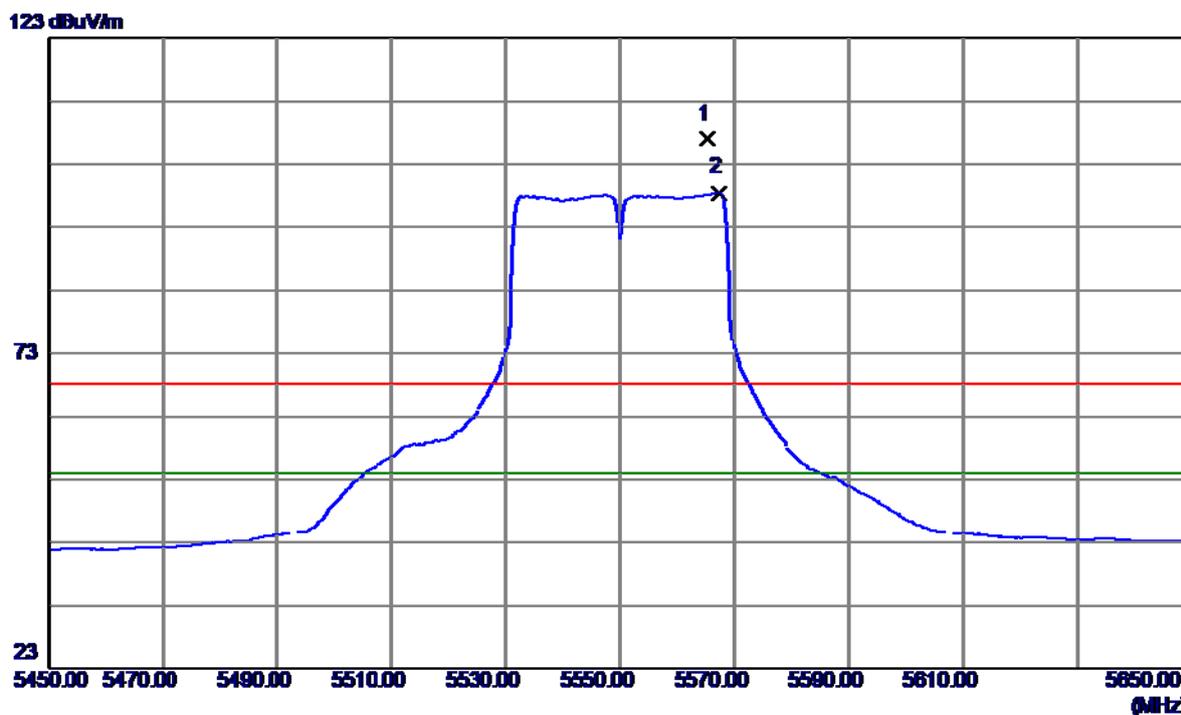

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5565.4000	65.99	41.05	107.04	68.30	38.74	Peak	no limit
2	5567.4000	57.45	41.05	98.50	54.00	44.50	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5550MHz


Horizontal

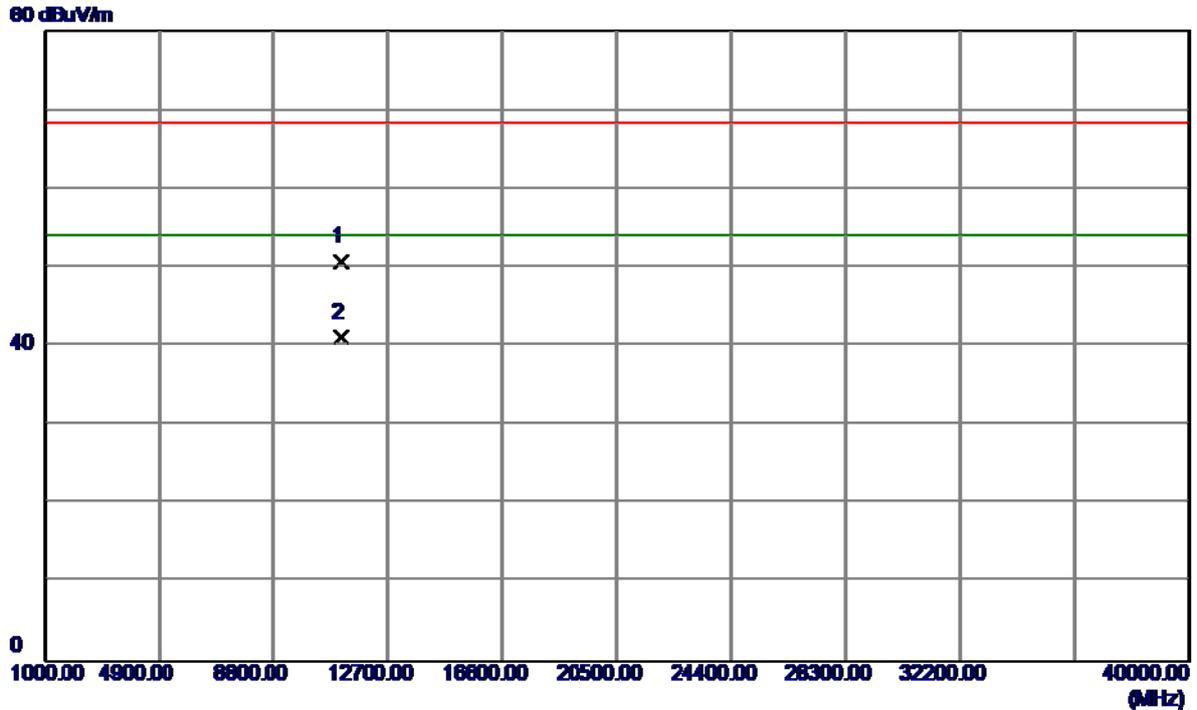

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11101.3600	34.76	15.99	50.75	68.30	-17.55	Peak	
2	11101.3600	25.06	15.99	41.05	54.00	-12.95	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Vertical

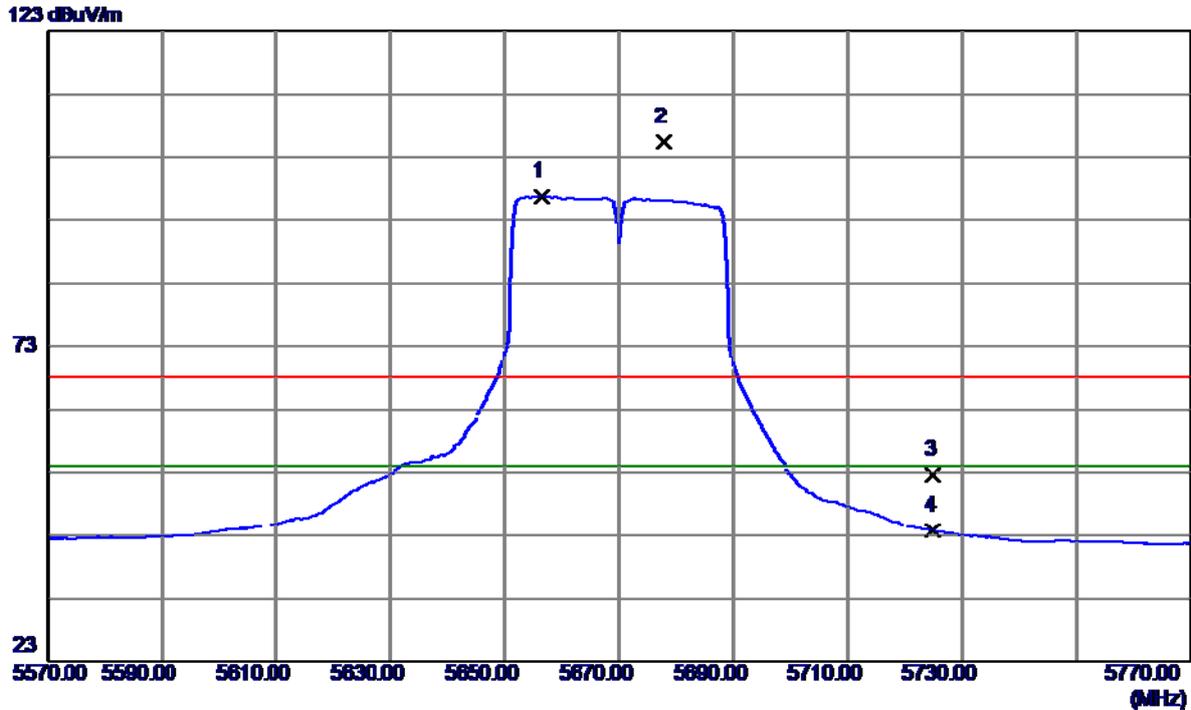

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5656.4000	55.72	41.17	96.89	54.00	42.89	AVG	no limit
2	5677.8000	64.19	41.20	105.39	68.30	37.09	Peak	no limit
3	5725.0000	11.41	41.27	52.68	68.30	-15.62	Peak	
4	5725.0000	2.55	41.27	43.82	54.00	-10.18	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Vertical

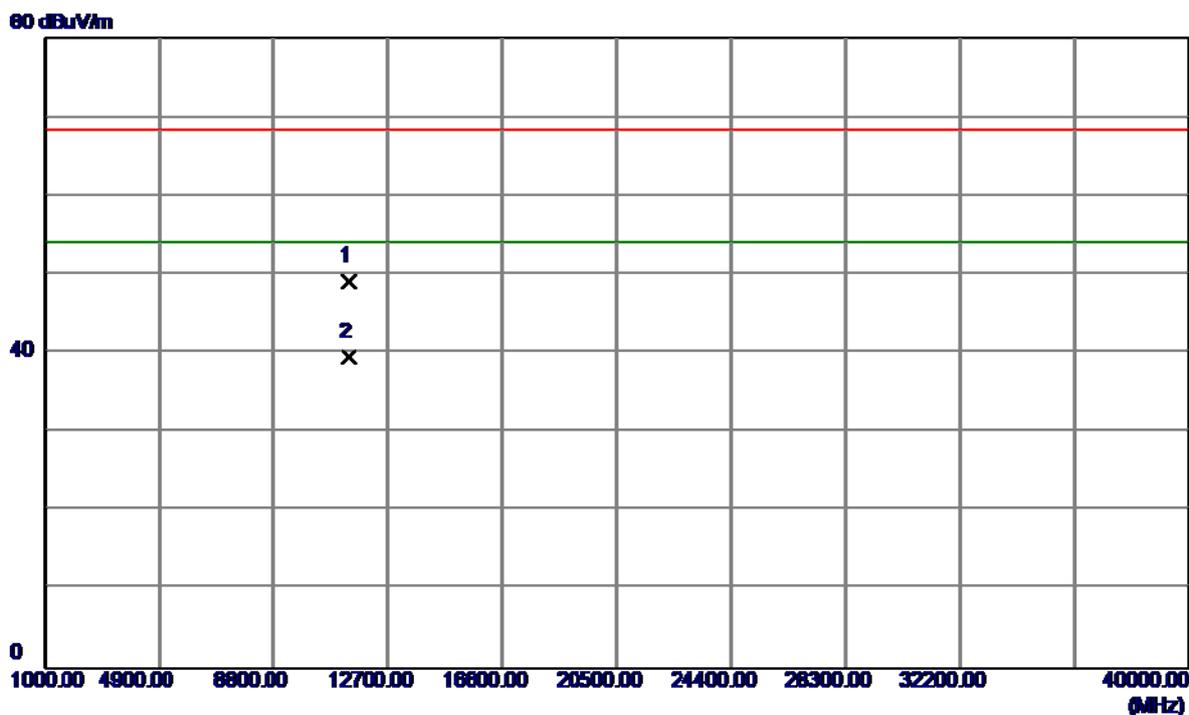

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11341.3600	32.56	16.56	49.12	68.30	-19.18	Peak	
2	11341.3600	22.97	16.56	39.53	54.00	-14.47	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Horizontal

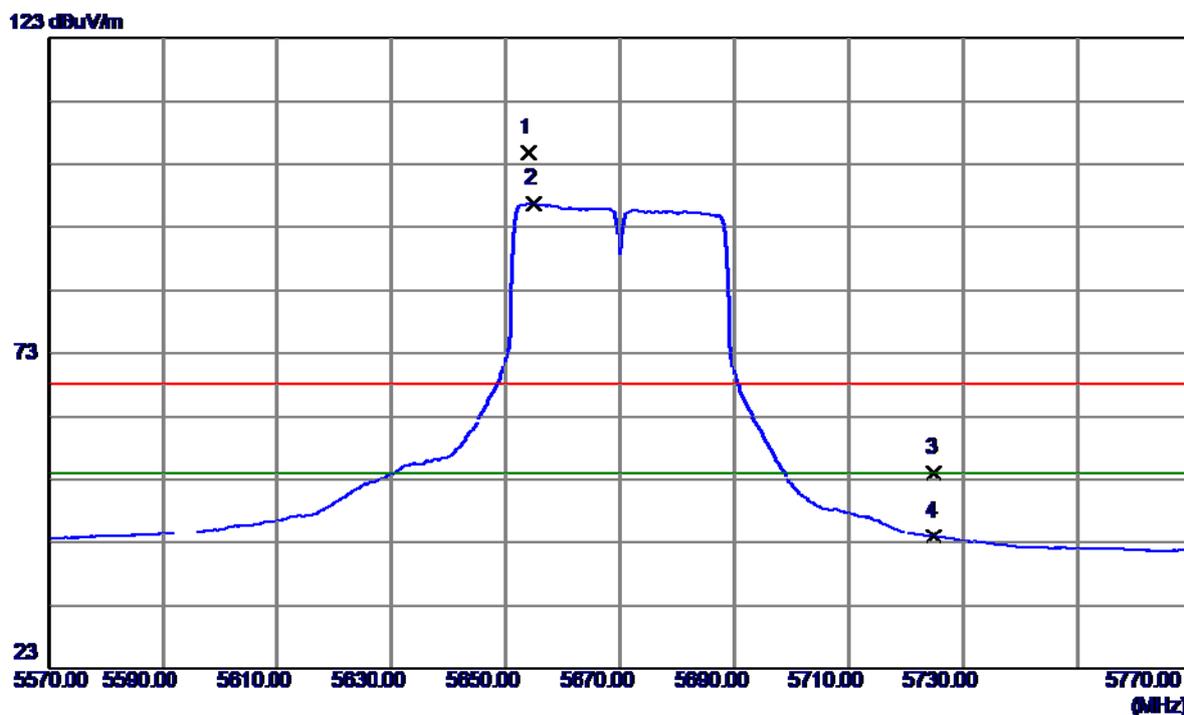

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5654.0000	63.54	41.17	104.71	68.30	36.41	Peak	no limit
2	5654.8000	55.58	41.17	96.75	54.00	42.75	AVG	no limit
3	5725.0000	12.69	41.27	53.96	68.30	-14.34	Peak	
4	5725.0000	2.67	41.27	43.94	54.00	-10.06	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

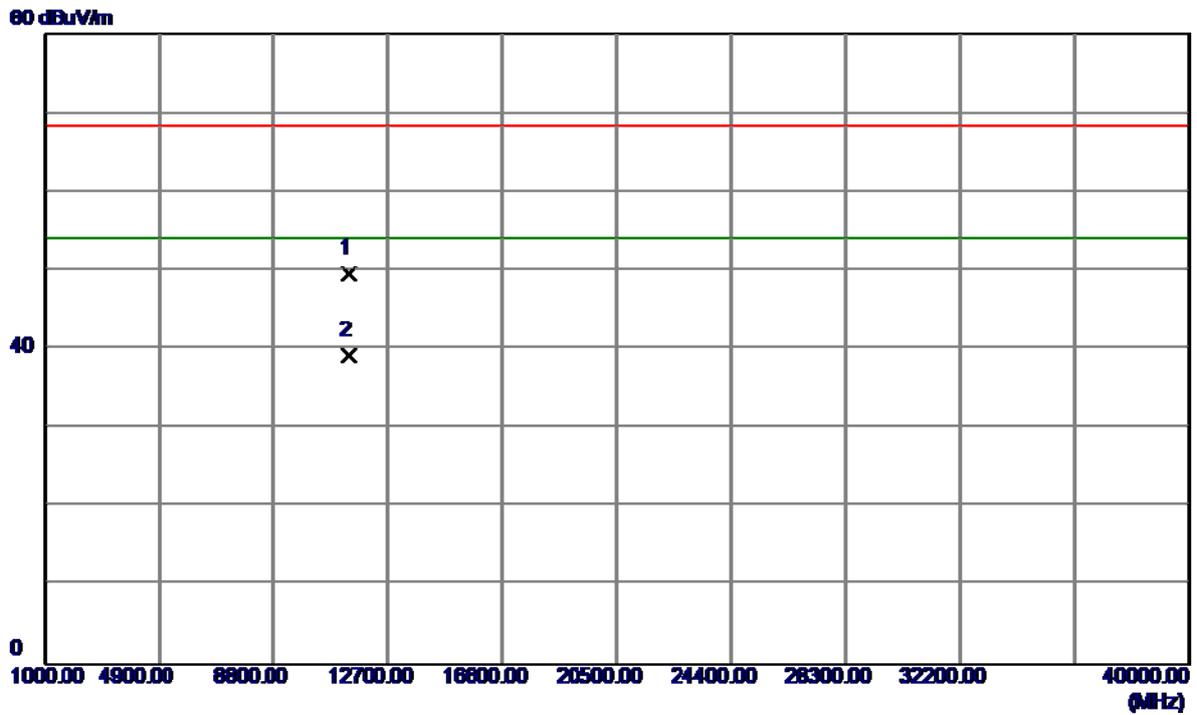


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11340.5199	33.11	16.56	49.67	68.30	-18.63	Peak	
2	11340.5199	22.69	16.56	39.25	54.00	-14.75	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical


128 dBuV/m

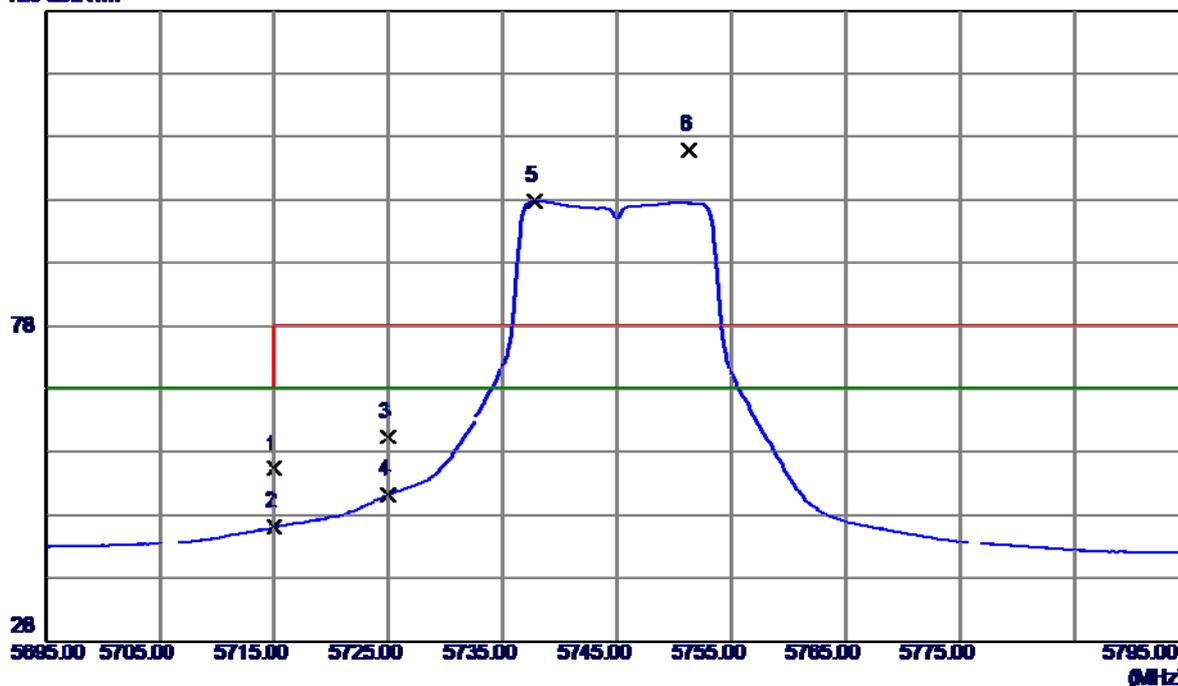

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	14.05	41.25	55.30	68.30	-13.00	Peak	
2	5715.0000	4.88	41.25	46.13	68.30	-22.17	AVG	
3	5725.0000	19.08	41.27	60.35	78.30	-17.95	Peak	
4	5725.0000	9.96	41.27	51.23	68.30	-17.07	AVG	
5	5737.8000	56.58	41.28	97.86	68.30	29.56	AVG	no limit
6	5751.3000	64.60	41.30	105.90	78.30	27.60	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

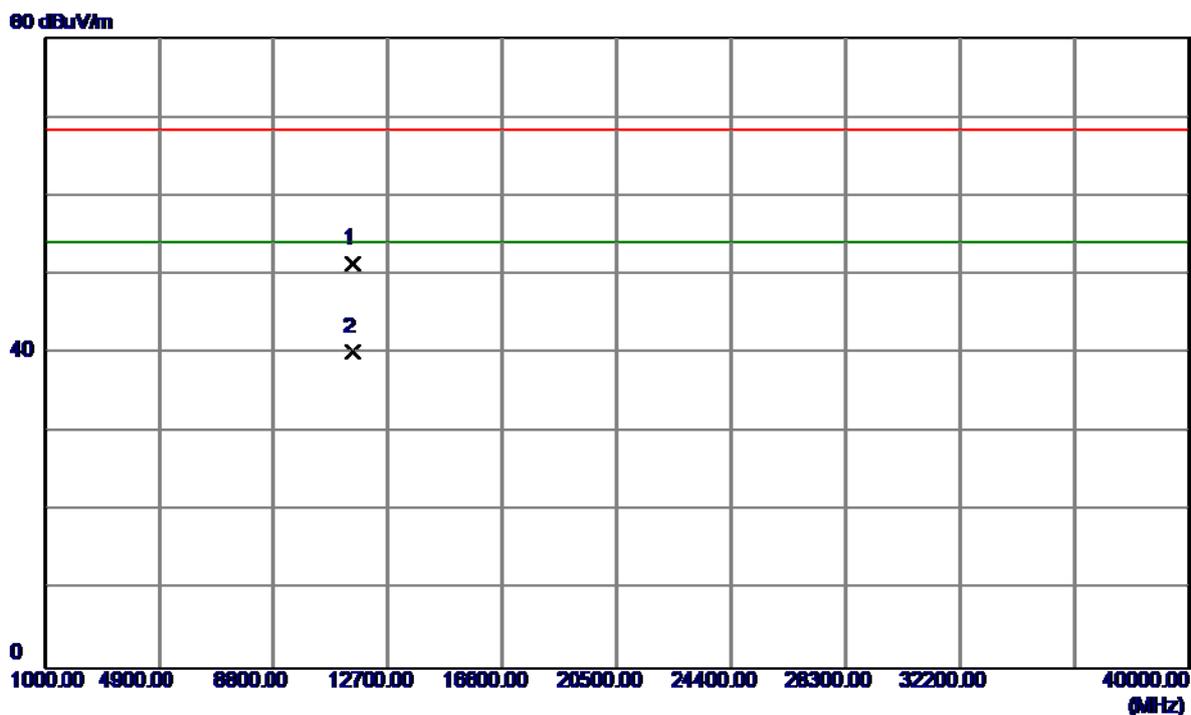


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.0500	34.40	16.91	51.31	68.30	-16.99	Peak	
2	11490.0500	23.18	16.91	40.09	54.00	-13.91	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal


127 dBuV/m

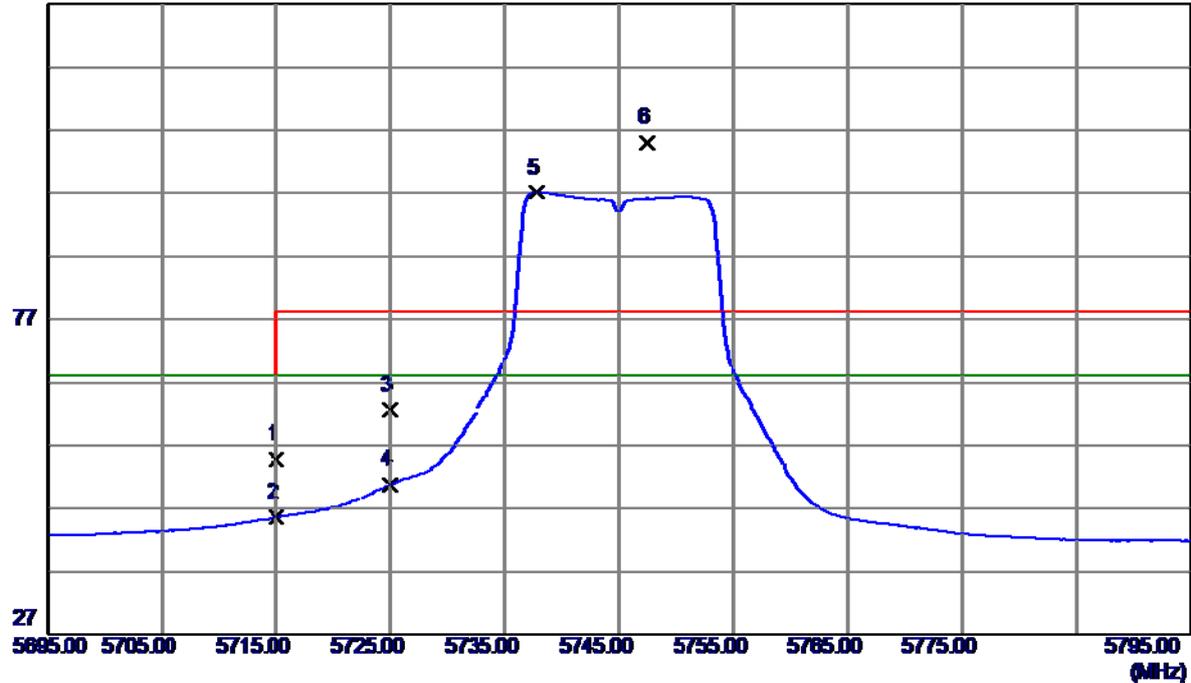

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	13.47	41.25	54.72	68.30	-13.58	Peak	
2	5715.0000	4.34	41.25	45.59	68.30	-22.71	AVG	
3	5725.0000	21.42	41.27	62.69	78.30	-15.61	Peak	
4	5725.0000	9.53	41.27	50.80	68.30	-17.50	AVG	
5	5737.8000	55.82	41.28	97.10	68.30	28.80	AVG	no limit
6	5747.4000	63.73	41.30	105.03	78.30	26.73	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal

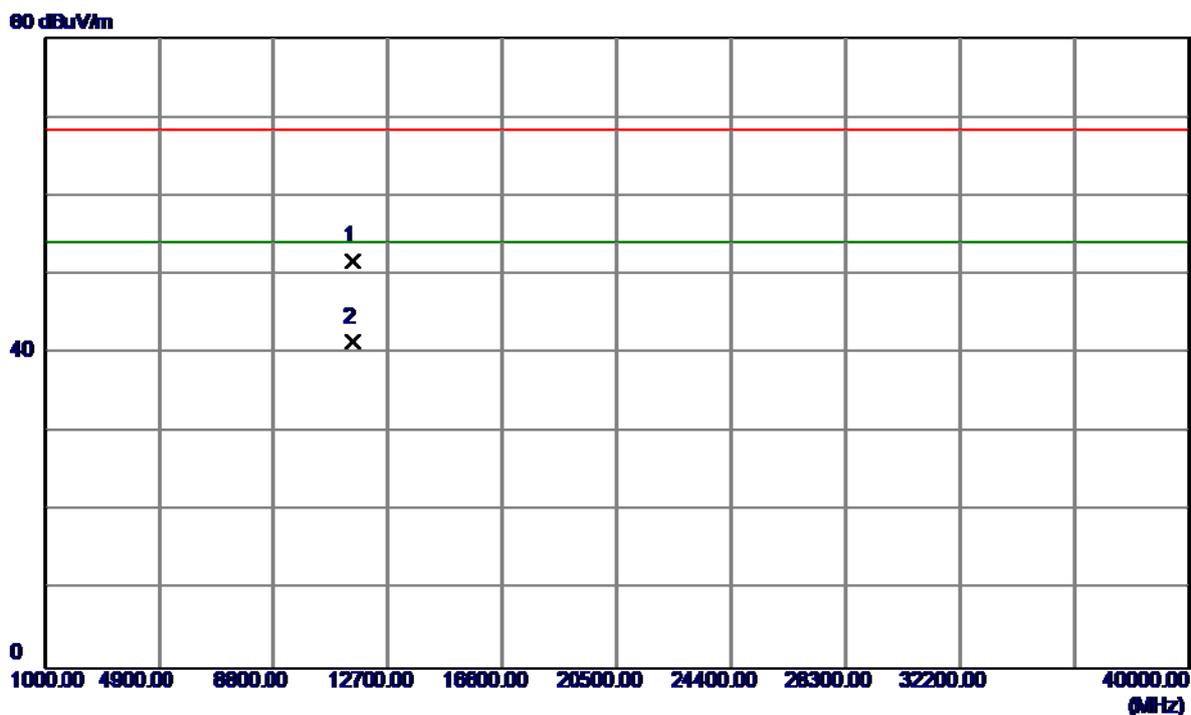


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.3400	34.85	16.91	51.76	68.30	-16.54	Peak	
2	11490.3400	24.48	16.91	41.39	54.00	-12.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Vertical


128 dBuV/m

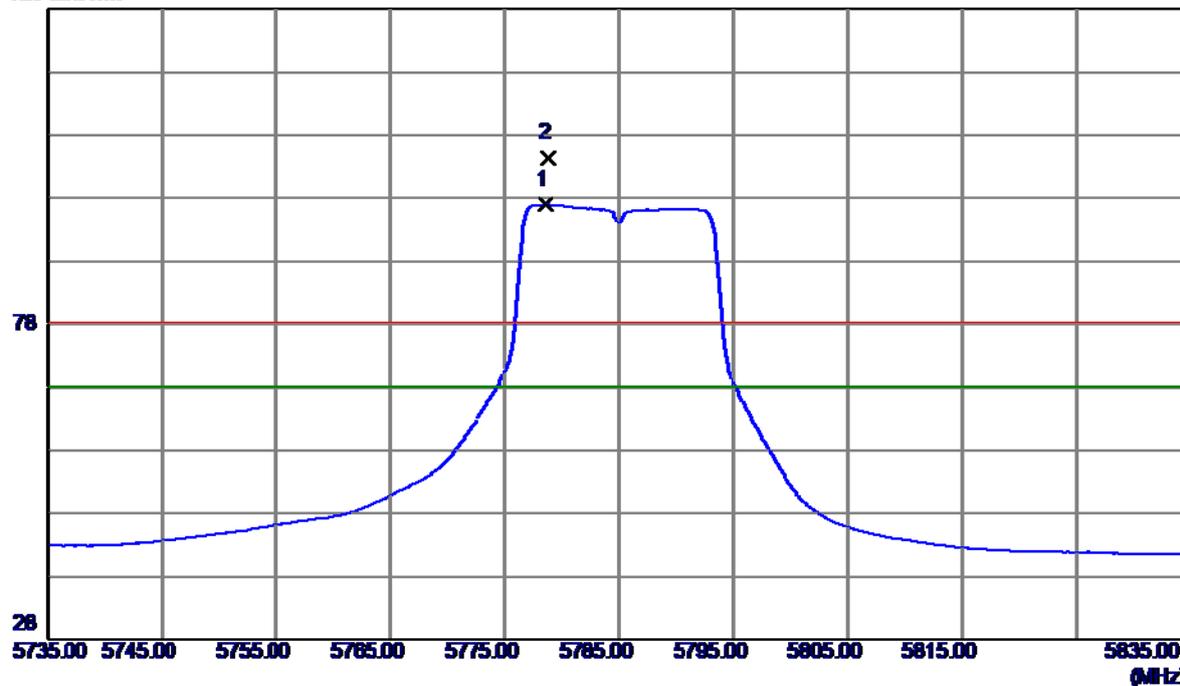

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5778.6000	55.57	41.34	96.91	68.30	28.61	AVG	no limit
2	5778.8000	62.98	41.34	104.32	78.30	26.02	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Vertical

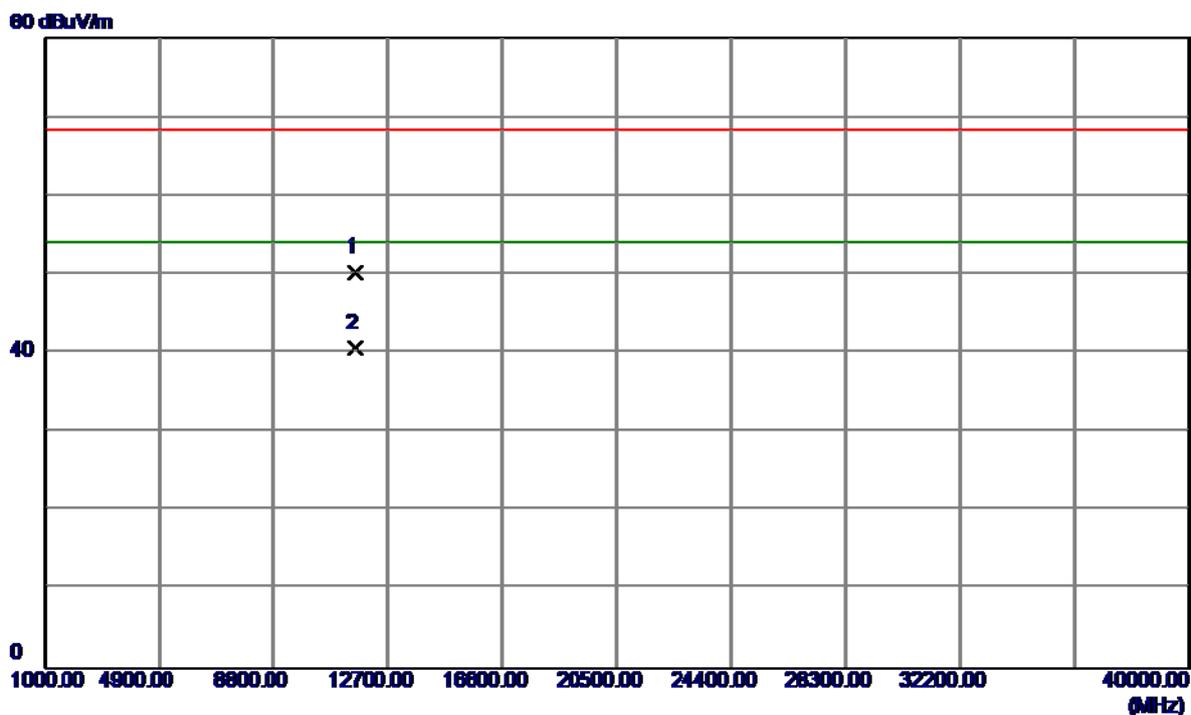


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.6800	33.26	17.05	50.31	68.30	-17.99	Peak	
2	11570.6800	23.53	17.05	40.58	54.00	-13.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz

Horizontal


128 dBuV/m

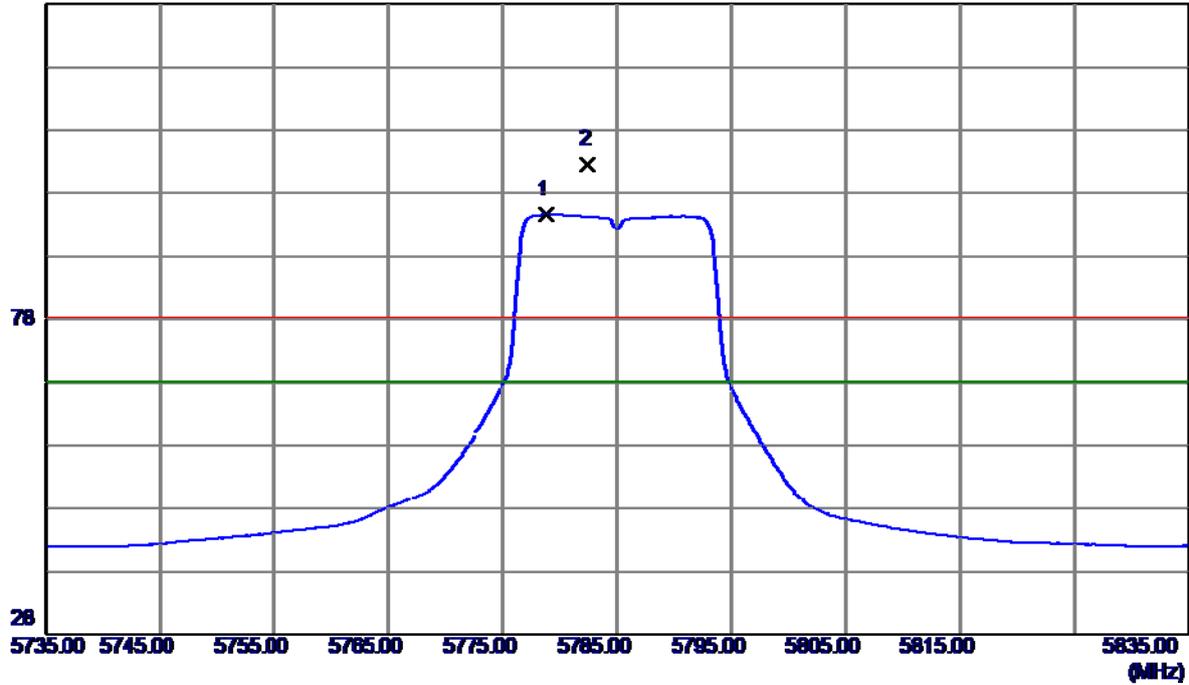

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5778.8000	53.26	41.34	94.60	68.30	26.30	AVG	no limit
2	5782.5000	61.17	41.34	102.51	78.30	24.21	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5785MHz


Horizontal

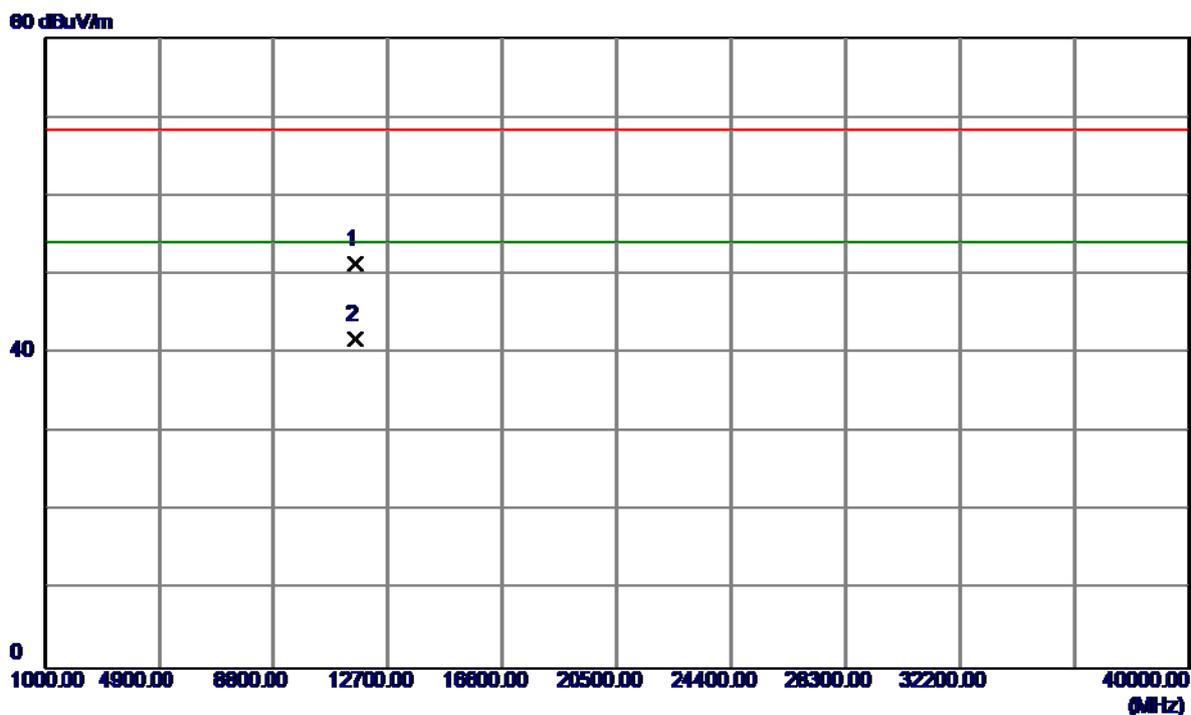

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.3600	34.23	17.05	51.28	68.30	-17.02	Peak	
2	11570.3600	24.64	17.05	41.69	54.00	-12.31	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

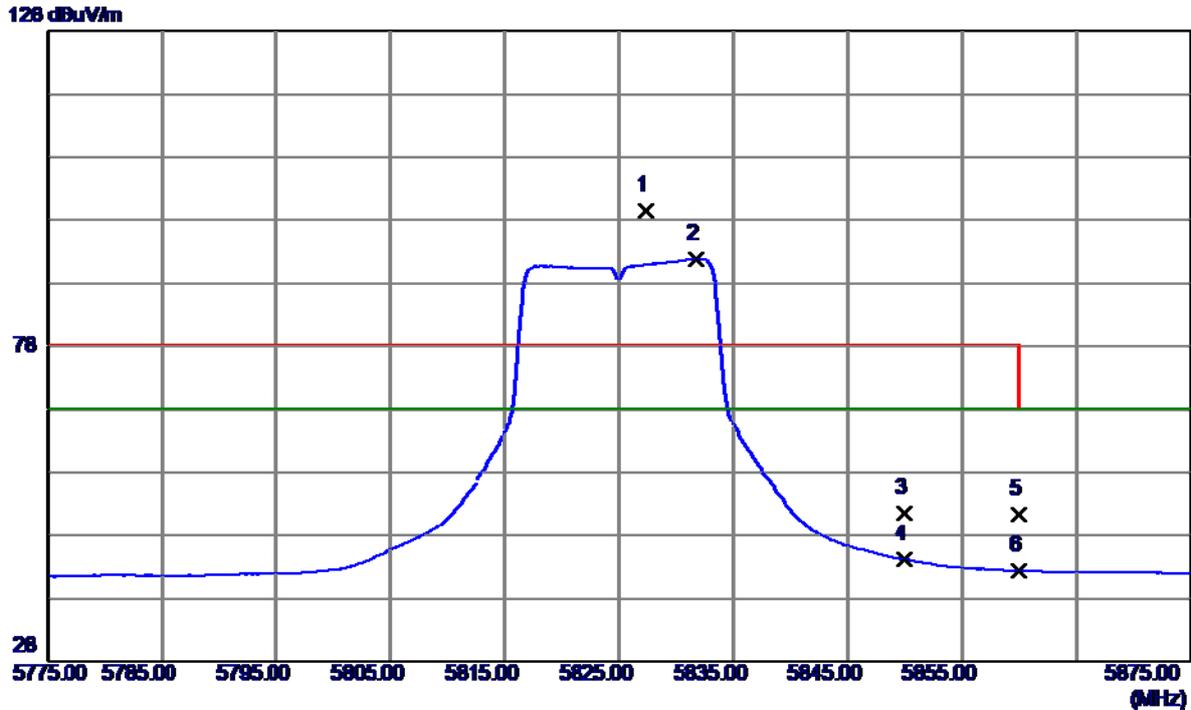

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5827.3000	58.27	41.41	99.68	78.30	21.38	Peak	no limit
2	5831.8000	50.40	41.41	91.81	68.30	23.51	AVG	no limit
3	5850.0000	10.10	41.44	51.54	78.30	-26.76	Peak	
4	5850.0000	2.74	41.44	44.18	68.30	-24.12	AVG	
5	5860.0000	9.91	41.45	51.36	78.30	-26.94	Peak	
6	5860.0000	0.96	41.45	42.41	68.30	-25.89	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical

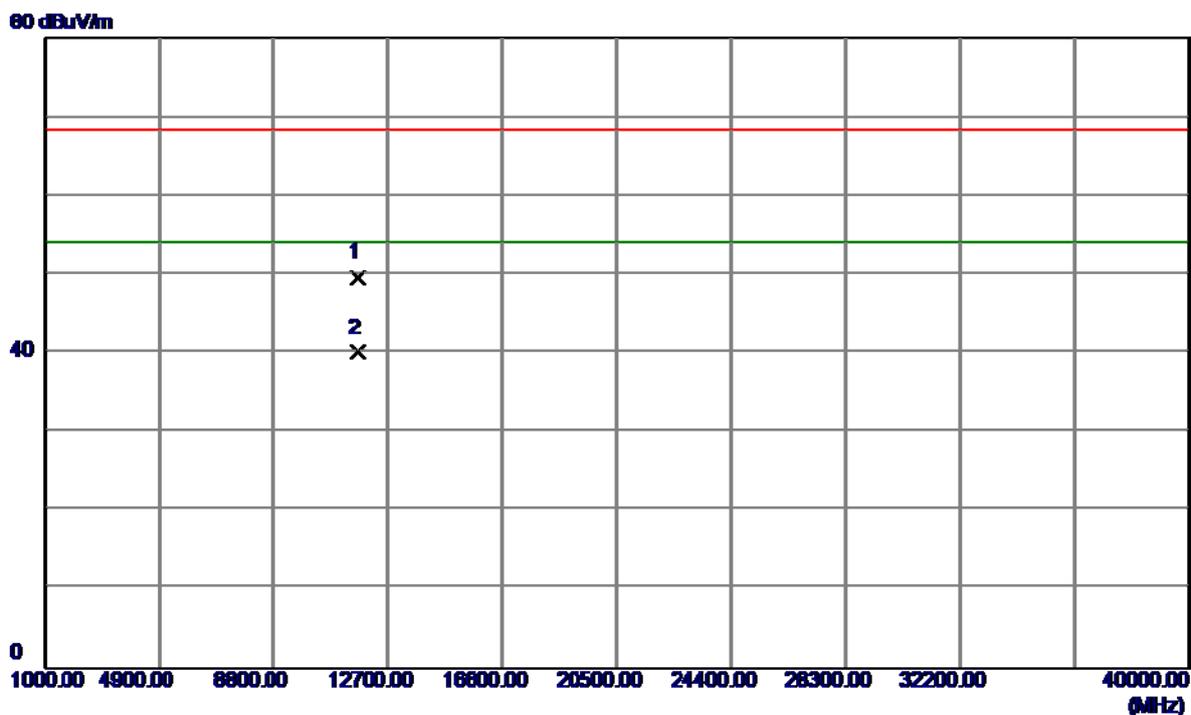


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.6400	32.36	17.17	49.53	68.30	-18.77	Peak	
2	11650.6400	22.91	17.17	40.08	54.00	-13.92	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal


128 dBuV/m

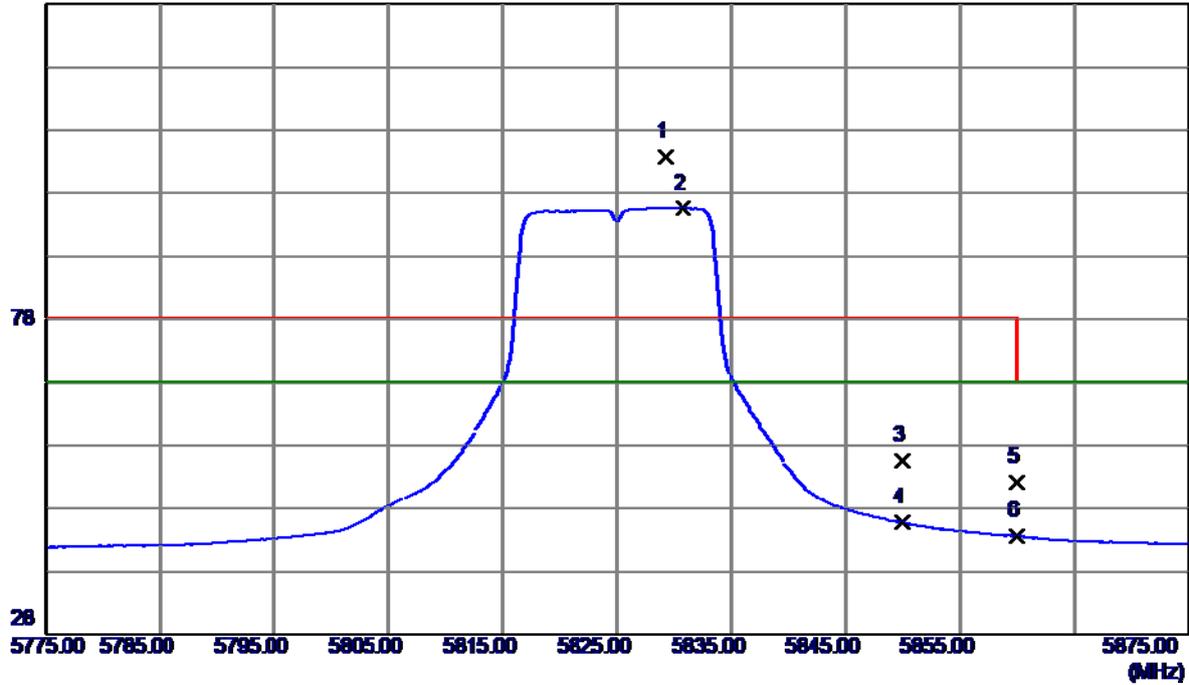

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5829.2000	62.31	41.41	103.72	78.30	25.42	Peak	no limit
2	5830.8000	54.24	41.41	95.65	68.30	27.35	AVG	no limit
3	5850.0000	14.09	41.44	55.53	78.30	-22.77	Peak	
4	5850.0000	4.32	41.44	45.76	68.30	-22.54	AVG	
5	5860.0000	10.67	41.45	52.12	78.30	-26.18	Peak	
6	5860.0000	2.13	41.45	43.58	68.30	-24.72	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

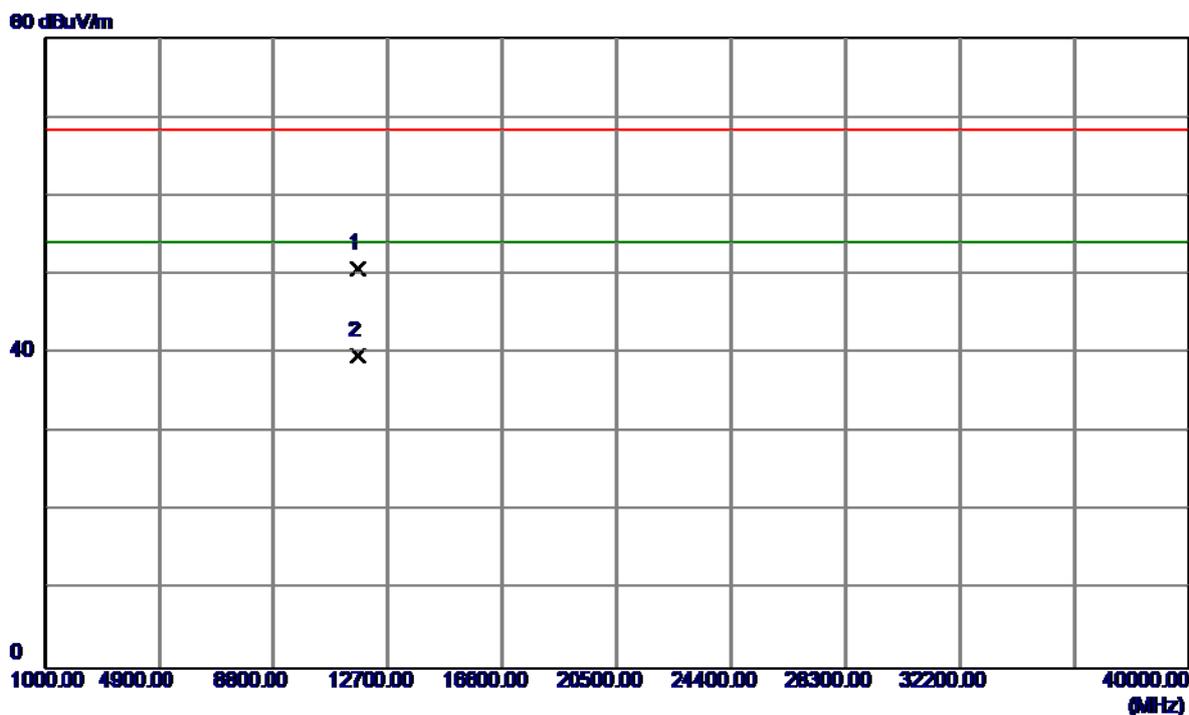


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11651.2800	33.53	17.18	50.71	68.30	-17.59	Peak	
2	11651.2800	22.48	17.18	39.66	54.00	-14.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical


128 dBuV/m

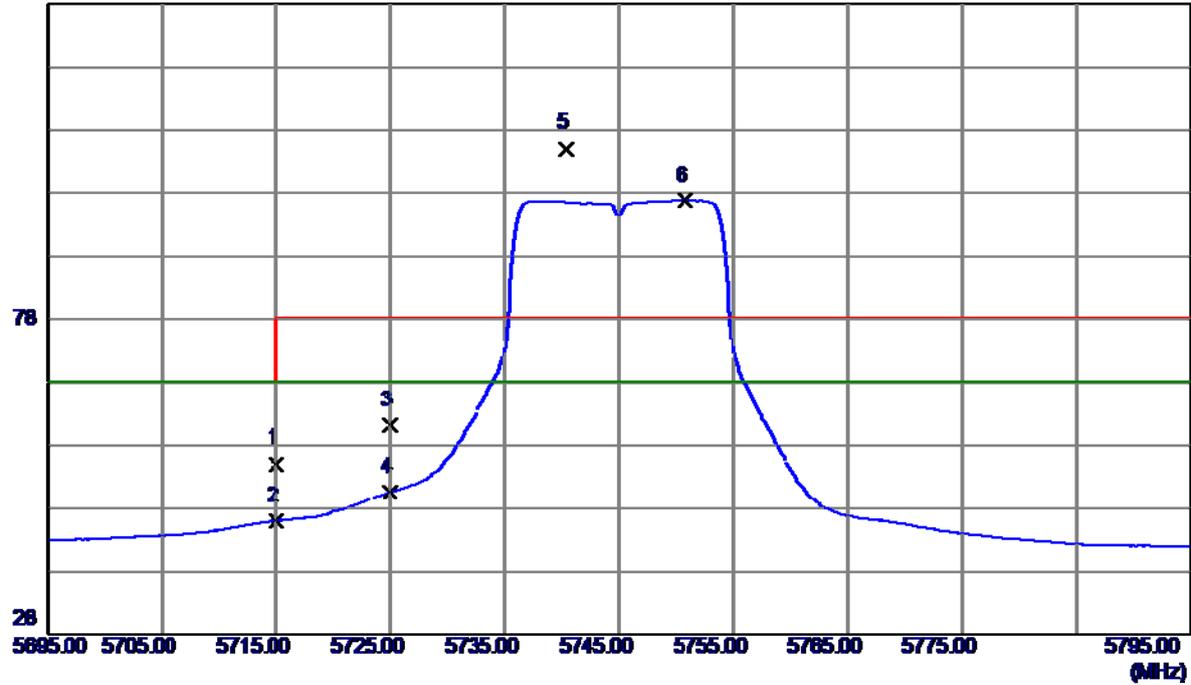

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	13.85	41.25	55.10	68.30	-13.20	Peak	
2	5715.0000	4.78	41.25	46.03	68.30	-22.27	AVG	
3	5725.0000	19.99	41.27	61.26	78.30	-17.04	Peak	
4	5725.0000	9.36	41.27	50.63	68.30	-17.67	AVG	
5	5740.3000	63.81	41.29	105.10	78.30	26.80	Peak	no limit
6	5750.8000	55.51	41.30	96.81	68.30	28.51	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

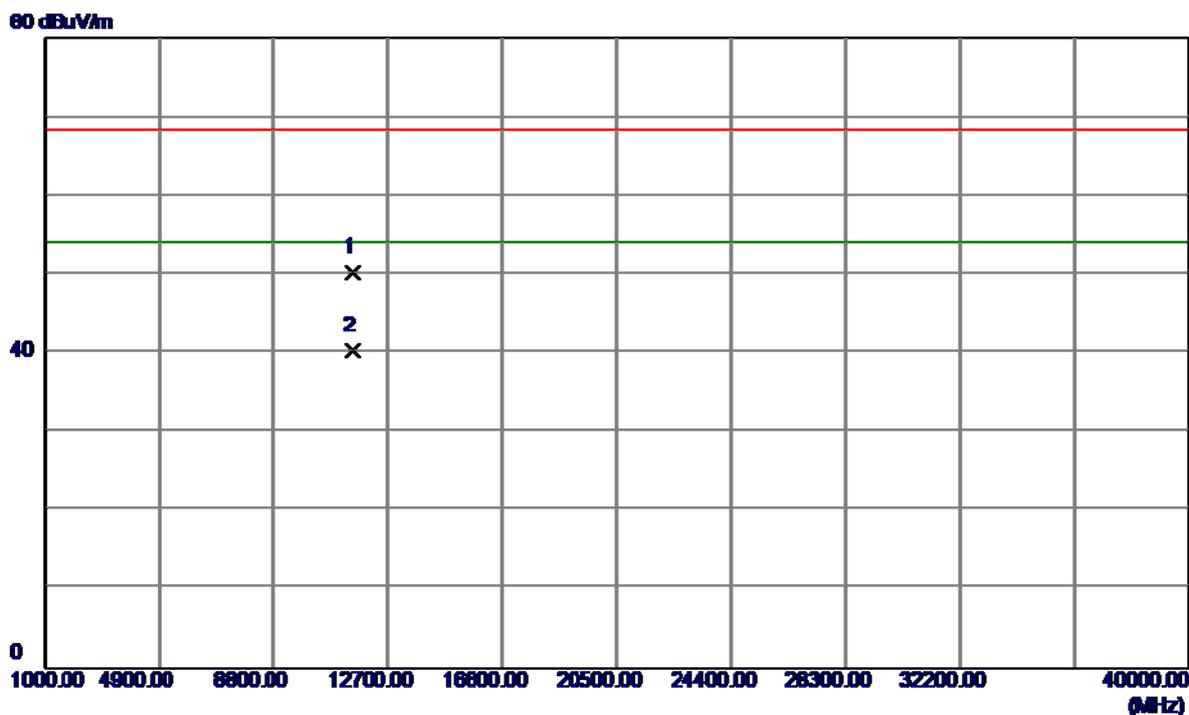


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.3400	33.27	16.91	50.18	68.30	-18.12	Peak	
2	11490.3400	23.37	16.91	40.28	54.00	-13.72	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal


127 dBuV/m

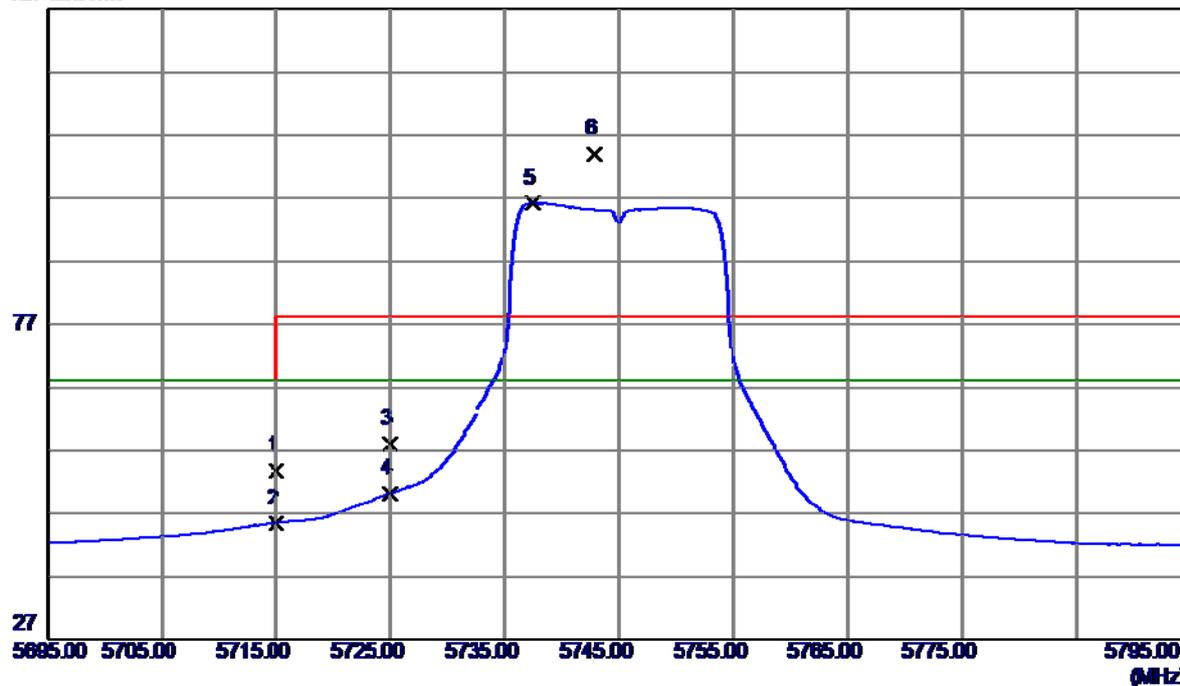

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	12.59	41.25	53.84	68.30	-14.46	Peak	
2	5715.0000	4.24	41.25	45.49	68.30	-22.81	AVG	
3	5725.0000	16.66	41.27	57.93	78.30	-20.37	Peak	
4	5725.0000	9.01	41.27	50.28	68.30	-18.02	AVG	
5	5737.4000	54.94	41.28	96.22	68.30	27.92	AVG	no limit
6	5742.9000	62.71	41.29	104.00	78.30	25.70	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

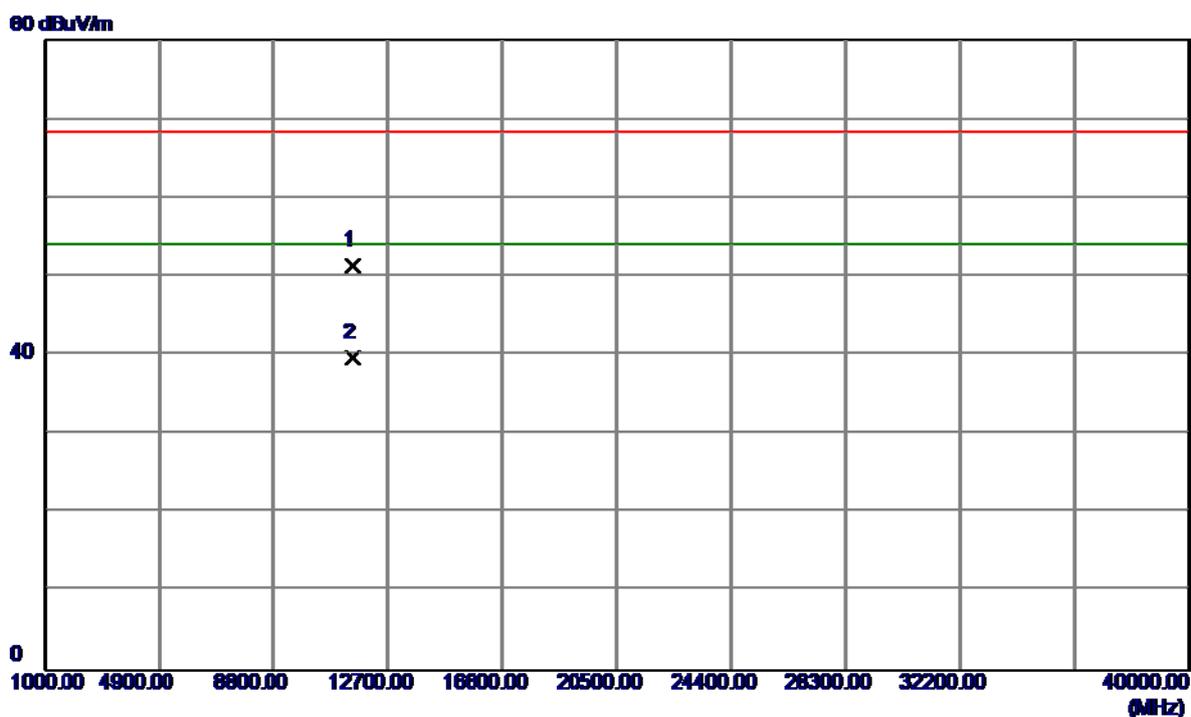

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.3500	34.46	16.91	51.37	68.30	-16.93	Peak	
2	11490.3500	22.73	16.91	39.64	54.00	-14.36	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz


Vertical

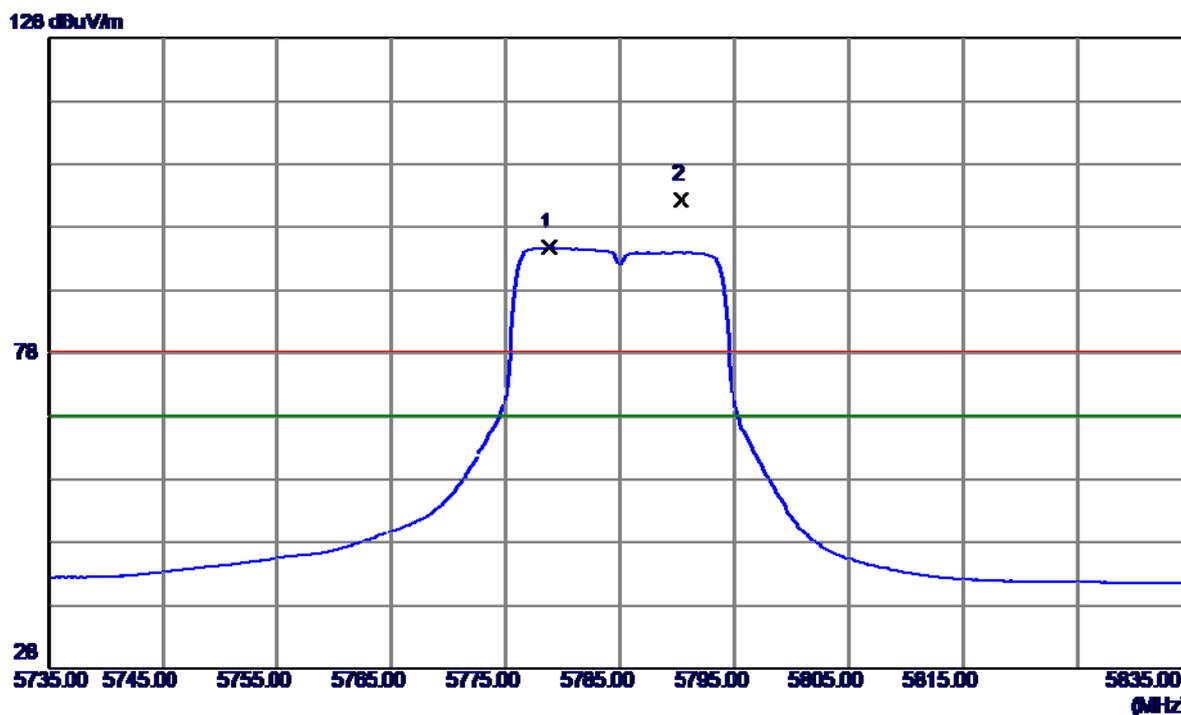

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5778.8000	53.44	41.34	94.78	68.30	26.48	AVG	no limit
2	5790.3000	61.03	41.35	102.38	78.30	24.08	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Vertical

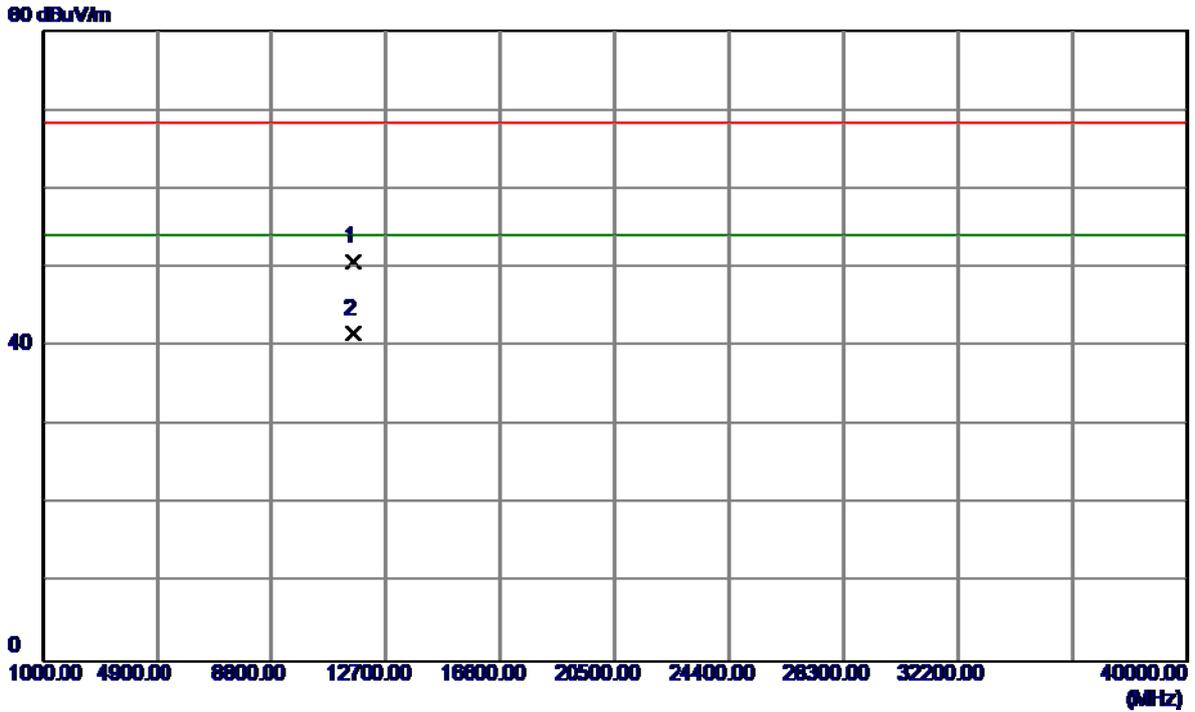


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11571.5800	33.62	17.05	50.67	68.30	-17.63	Peak	
2	11571.5800	24.50	17.05	41.55	54.00	-12.45	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Horizontal


128 dBuV/m

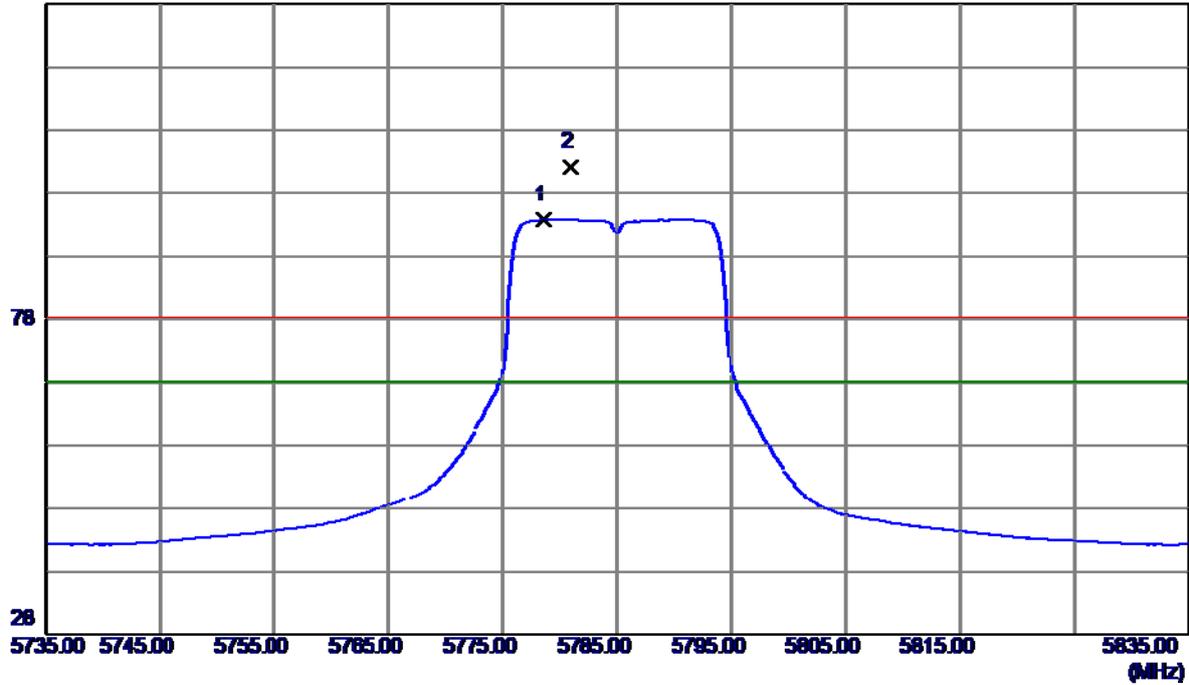

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5778.6000	52.53	41.34	93.87	68.30	25.57	AVG	no limit
2	5780.9000	60.80	41.34	102.14	78.30	23.84	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5785MHz

Horizontal

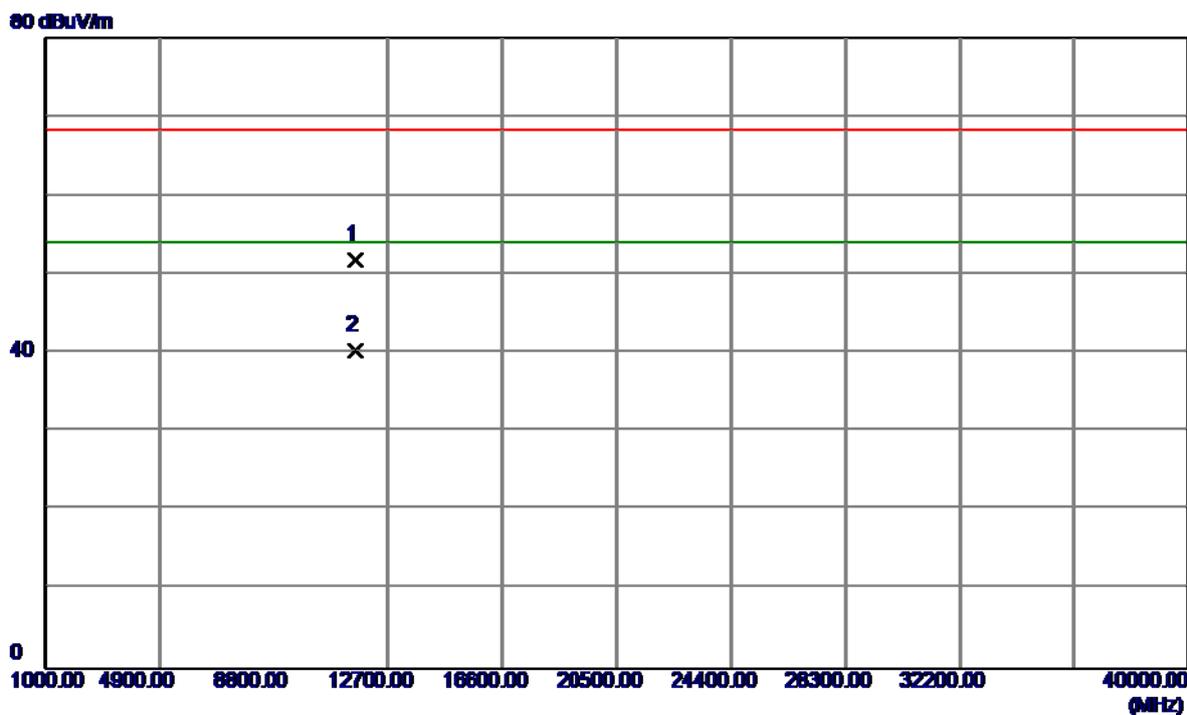


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.1600	34.82	17.05	51.87	68.30	-16.43	Peak	
2	11570.1600	23.24	17.05	40.29	54.00	-13.71	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical


128 dBuV/m

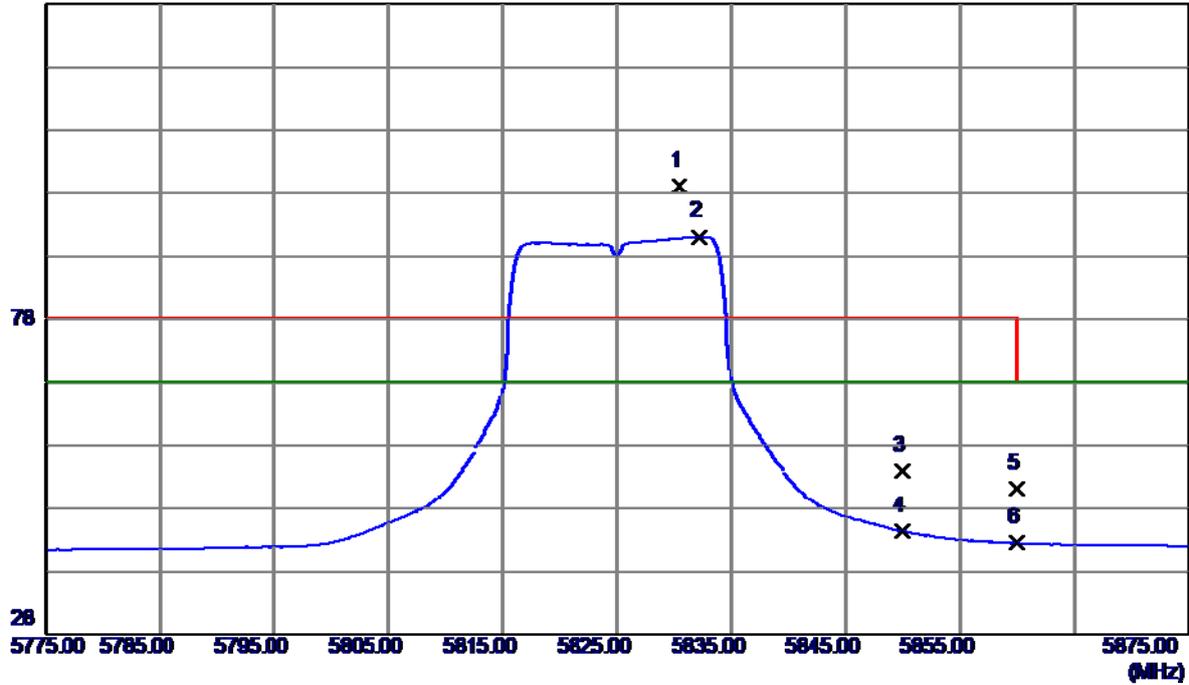

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5830.4000	57.71	41.41	99.12	78.30	20.82	Peak	no limit
2	5832.2000	49.69	41.41	91.10	68.30	22.80	AVG	no limit
3	5850.0000	12.61	41.44	54.05	78.30	-24.25	Peak	
4	5850.0000	2.91	41.44	44.35	68.30	-23.95	AVG	
5	5860.0000	9.69	41.45	51.14	78.30	-27.16	Peak	
6	5860.0000	1.06	41.45	42.51	68.30	-25.79	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical

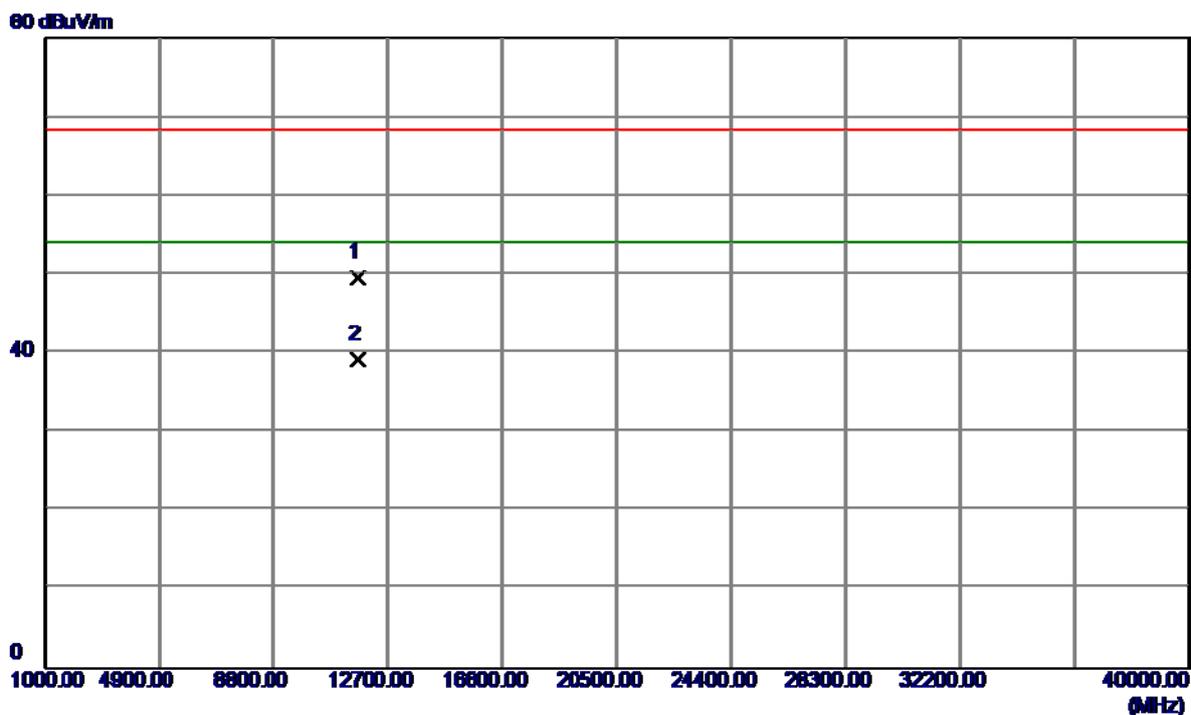


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.4700	32.36	17.17	49.53	68.30	-18.77	Peak	
2	11650.4700	22.10	17.17	39.27	54.00	-14.73	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal


128 dBuV/m

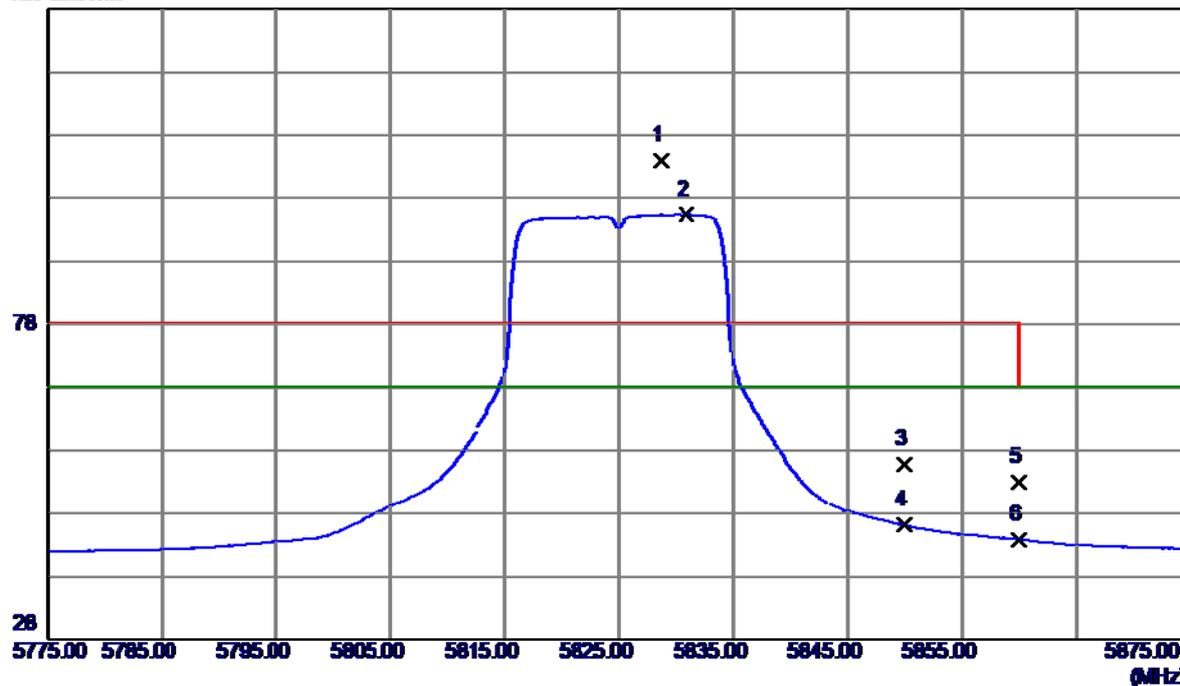

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5828.7000	62.68	41.41	104.09	78.30	25.79	Peak	no limit
2	5830.9000	53.94	41.41	95.35	68.30	27.05	AVG	no limit
3	5850.0000	14.43	41.44	55.87	78.30	-22.43	Peak	
4	5850.0000	4.67	41.44	46.11	68.30	-22.19	AVG	
5	5860.0000	11.63	41.45	53.08	78.30	-25.22	Peak	
6	5860.0000	2.43	41.45	43.88	68.30	-24.42	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal

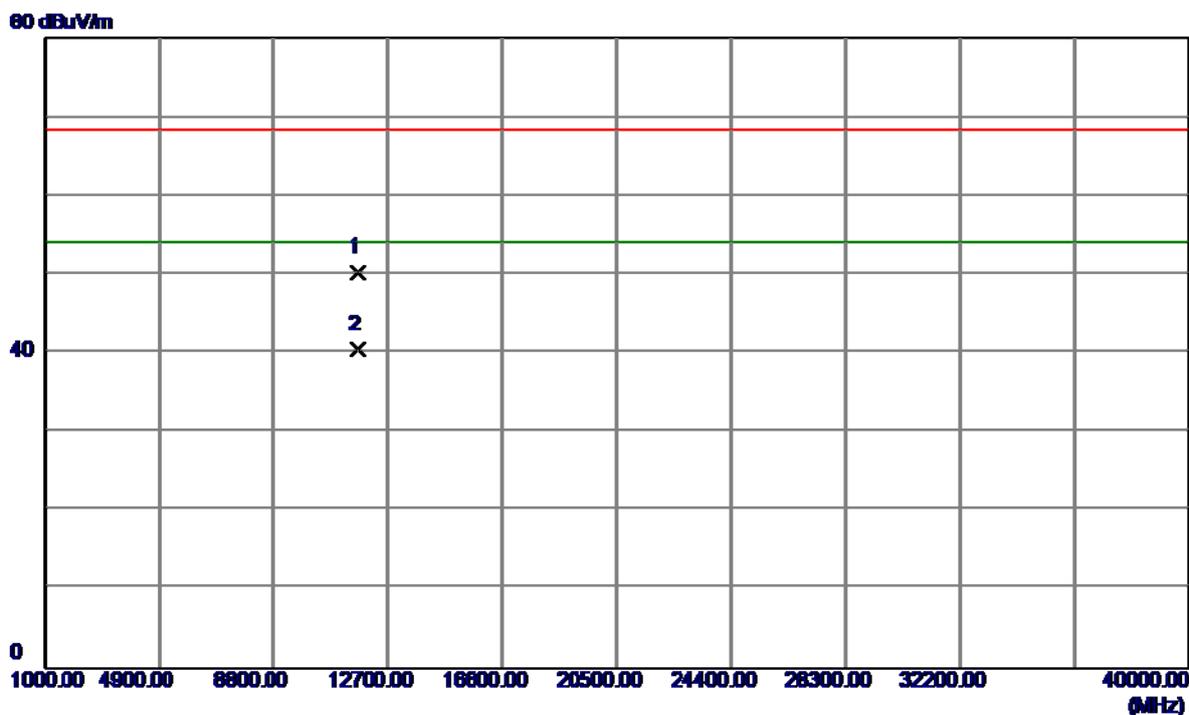


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.8700	33.06	17.17	50.23	68.30	-18.07	Peak	
2	11650.8700	23.29	17.17	40.46	54.00	-13.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical


128 dBuV/m

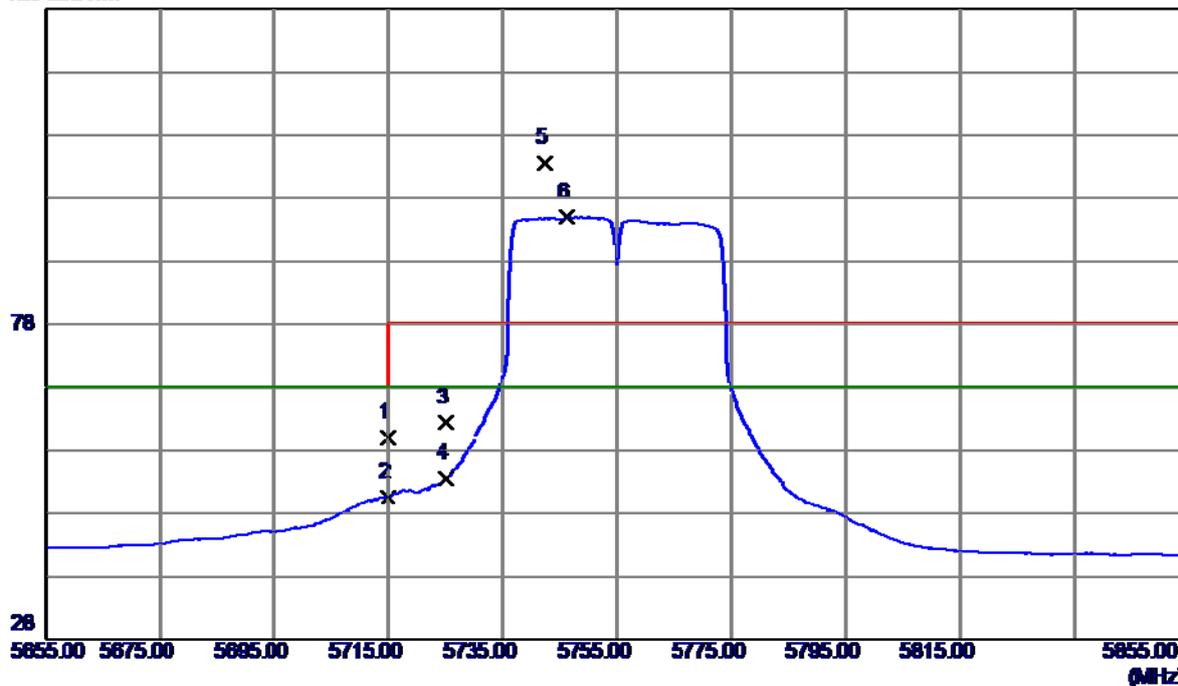

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	18.66	41.25	59.91	68.30	-8.39	Peak	
2	5715.0000	9.44	41.25	50.69	68.30	-17.61	AVG	
3	5725.0000	21.08	41.27	62.35	78.30	-15.95	Peak	
4	5725.0000	12.32	41.27	53.59	68.30	-14.71	AVG	
5	5742.4000	62.35	41.29	103.64	78.30	25.34	Peak	no limit
6	5746.2000	53.66	41.29	94.95	68.30	26.65	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical

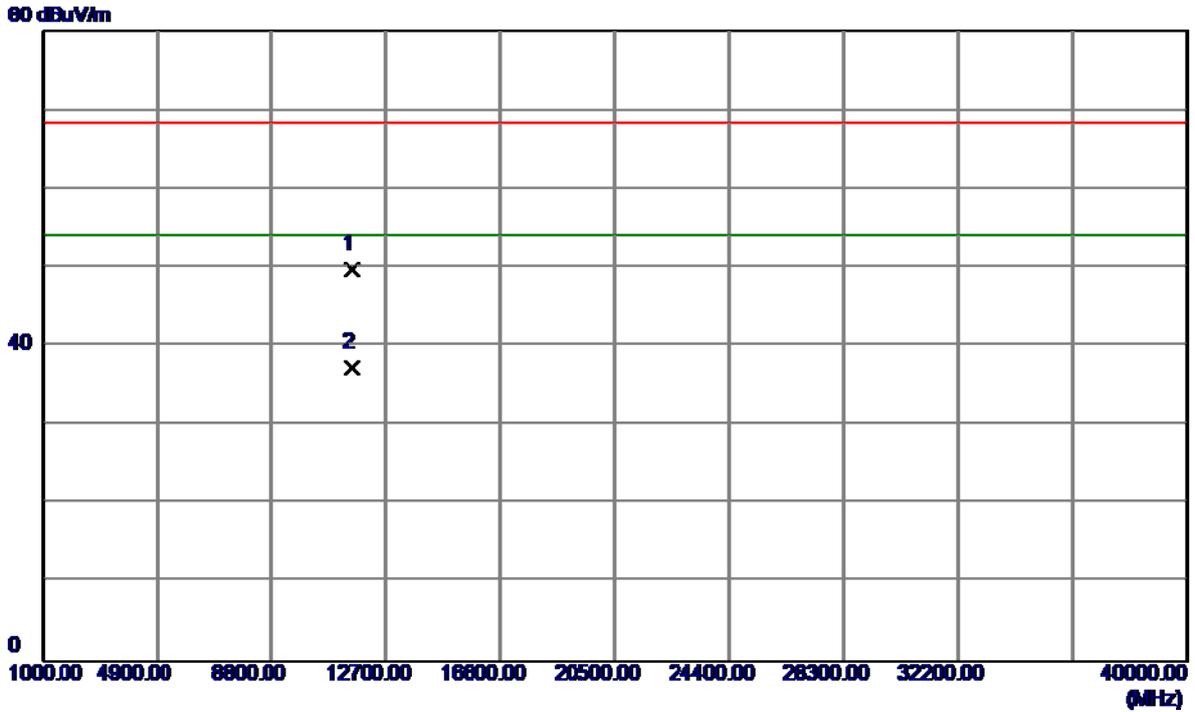


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.3700	32.81	16.95	49.76	68.30	-18.54	Peak	
2	11510.3700	20.31	16.95	37.26	54.00	-16.74	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal


128 dBuV/m

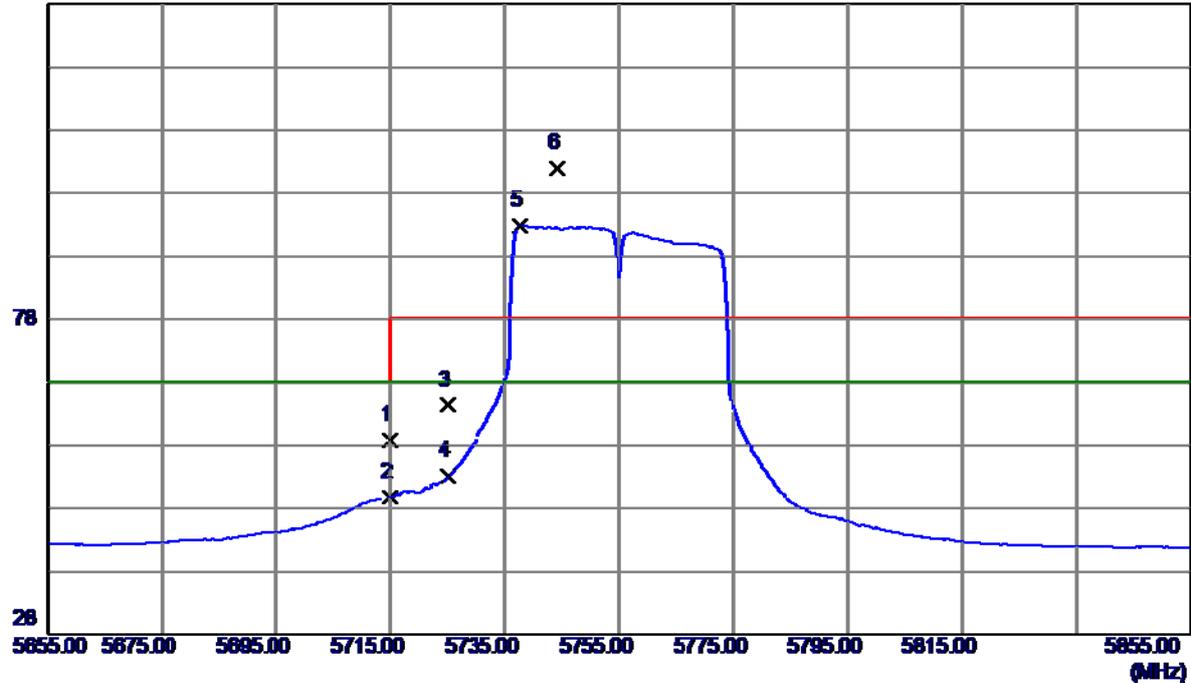

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	17.46	41.25	58.71	68.30	-9.59	Peak	
2	5715.0000	8.52	41.25	49.77	68.30	-18.53	AVG	
3	5725.0000	23.07	41.27	64.34	78.30	-13.96	Peak	
4	5725.0000	11.85	41.27	53.12	68.30	-15.18	AVG	
5	5737.6000	51.52	41.28	92.80	68.30	24.50	AVG	no limit
6	5744.2000	60.71	41.29	102.00	78.30	23.70	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal

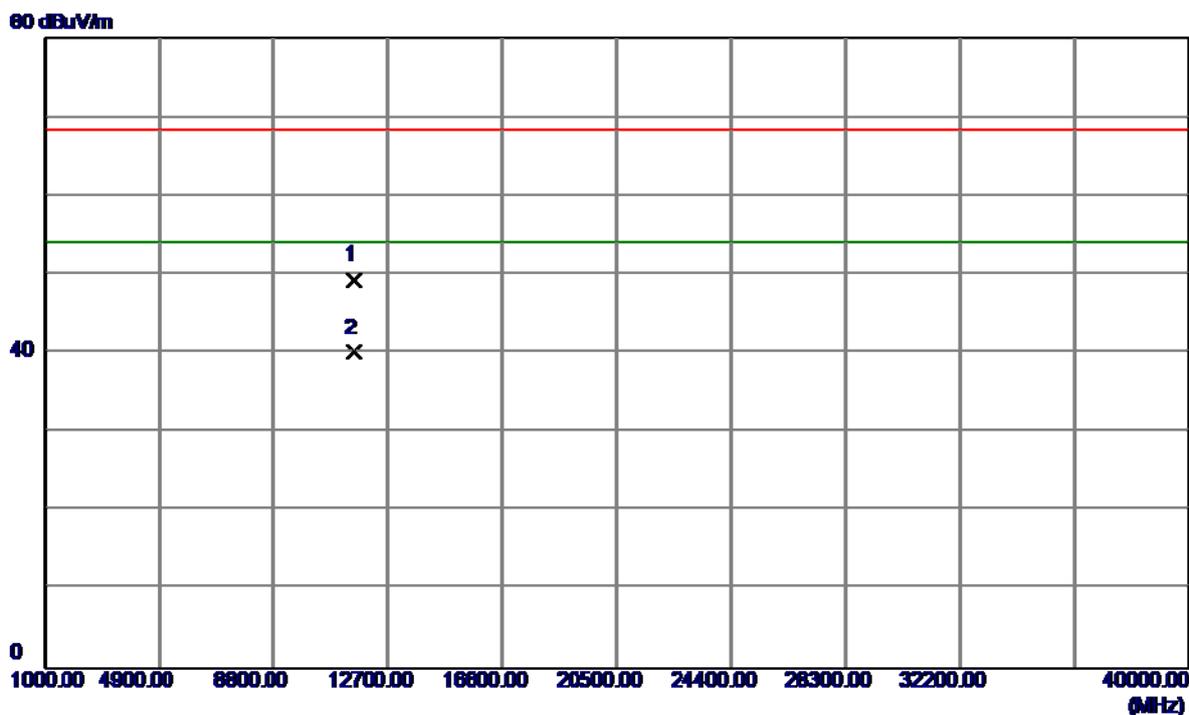


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.2800	32.36	16.95	49.31	68.30	-18.99	Peak	
2	11510.2800	23.13	16.95	40.08	54.00	-13.92	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Vertical


128 dBuV/m

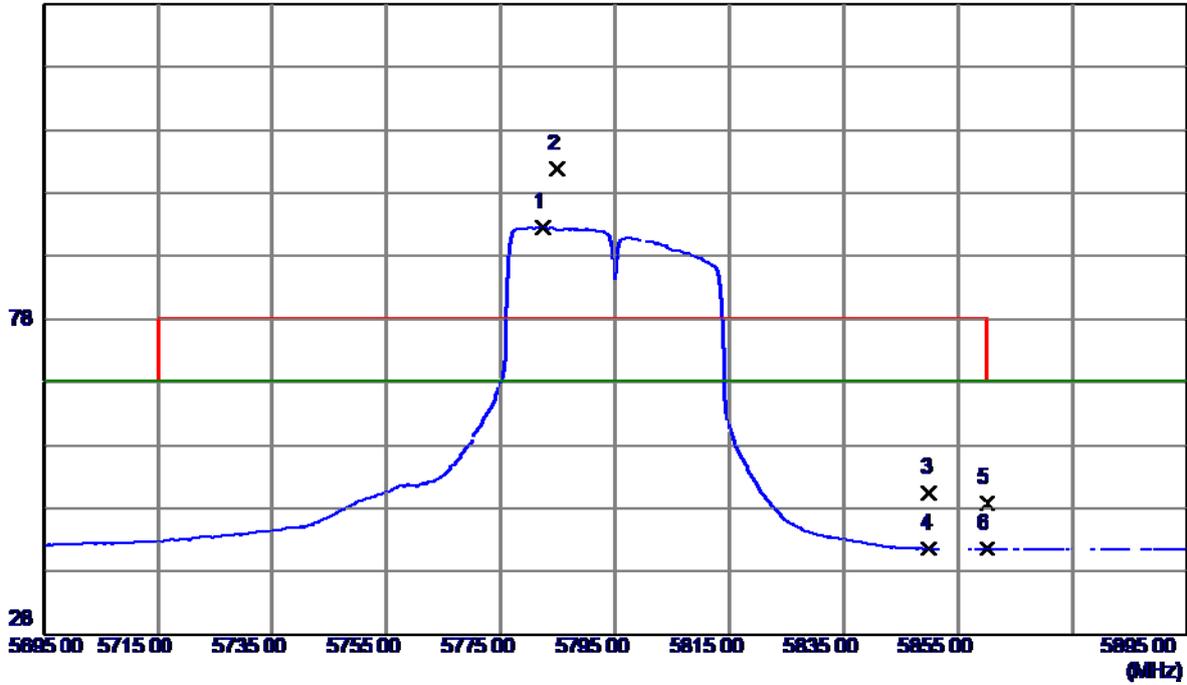

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5782.4000	51.28	41.34	92.62	68.30	24.32	AVG	no limit
2	5784.8000	60.40	41.35	101.75	78.30	23.45	Peak	no limit
3	5850.0000	9.05	41.44	50.49	78.30	-27.81	Peak	
4	5850.0000	0.19	41.44	41.63	68.30	-26.67	AVG	
5	5860.0000	7.38	41.45	48.83	78.30	-29.47	Peak	
6	5860.0000	0.12	41.45	41.57	68.30	-26.73	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

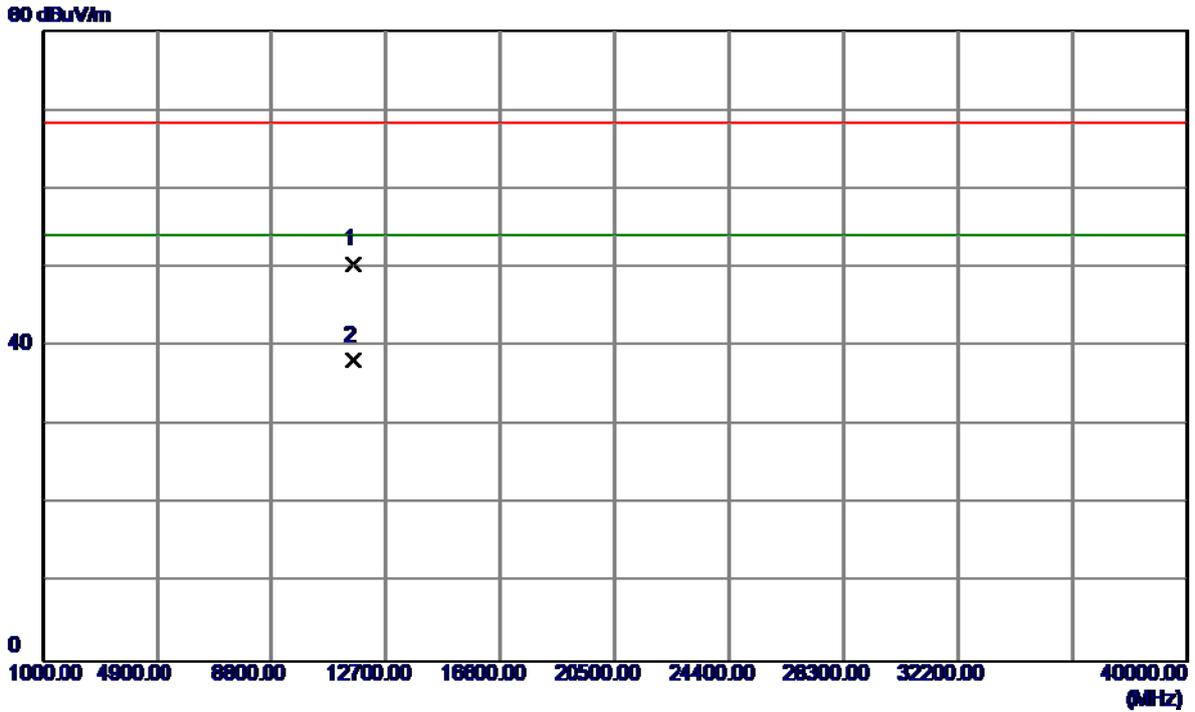

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11592.8099	33.26	17.08	50.34	68.30	-17.96	Peak	
2	11592.8099	21.08	17.08	38.16	54.00	-15.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

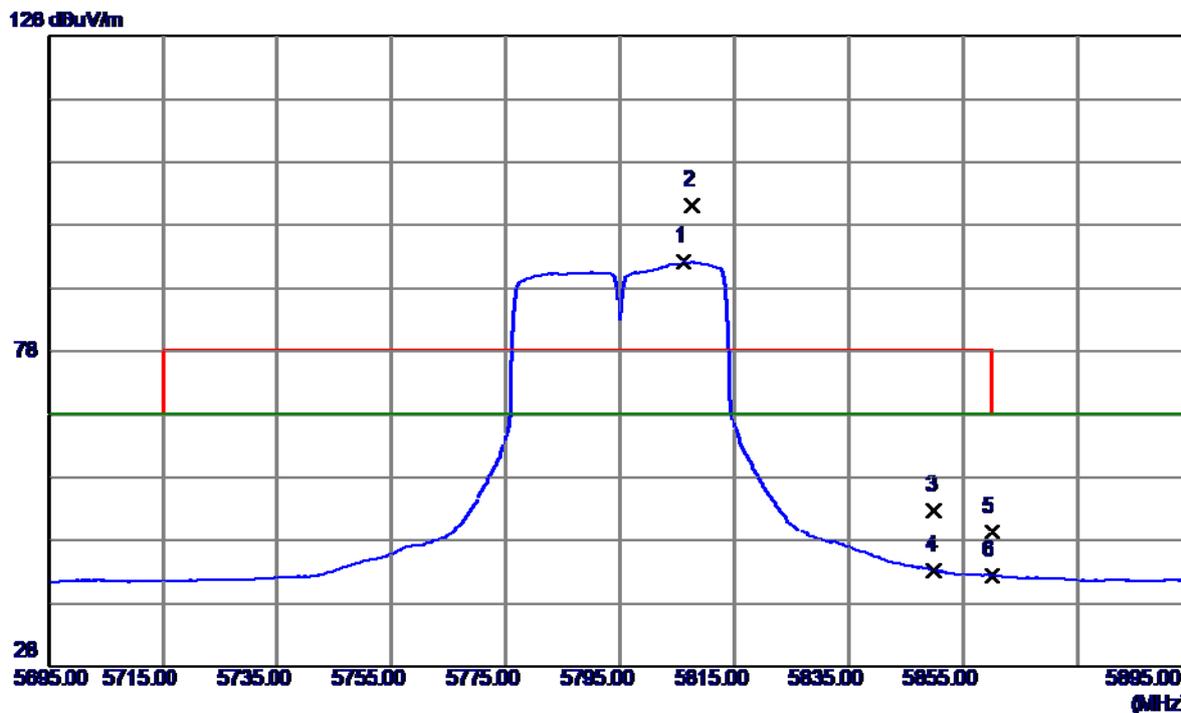

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5806.2000	50.77	41.38	92.15	68.30	23.85	AVG	no limit
2	5807.6000	59.74	41.38	101.12	78.30	22.82	Peak	no limit
3	5850.0000	11.38	41.44	52.82	78.30	-25.48	Peak	
4	5850.0000	1.77	41.44	43.21	68.30	-25.09	AVG	
5	5860.0000	7.96	41.45	49.41	78.30	-28.89	Peak	
6	5860.0000	0.99	41.45	42.44	68.30	-25.86	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Horizontal

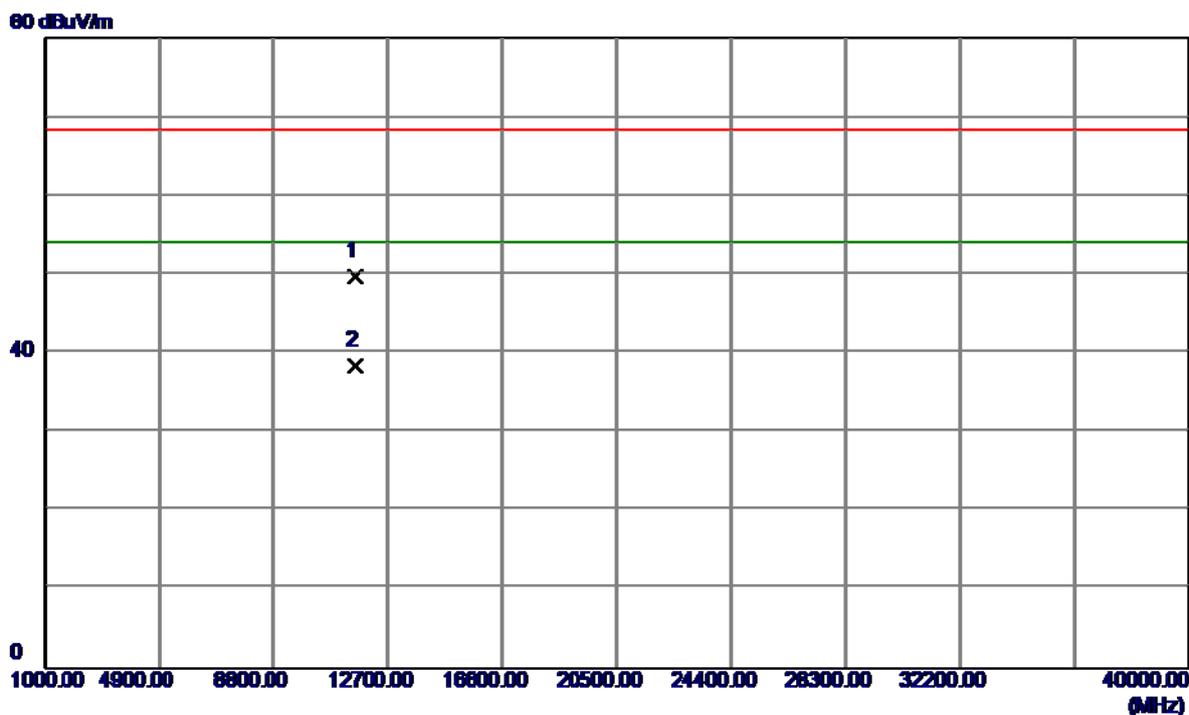

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11591.2800	32.63	17.08	49.71	68.30	-18.59	Peak	
2	11591.3600	21.27	17.08	38.35	54.00	-15.65	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

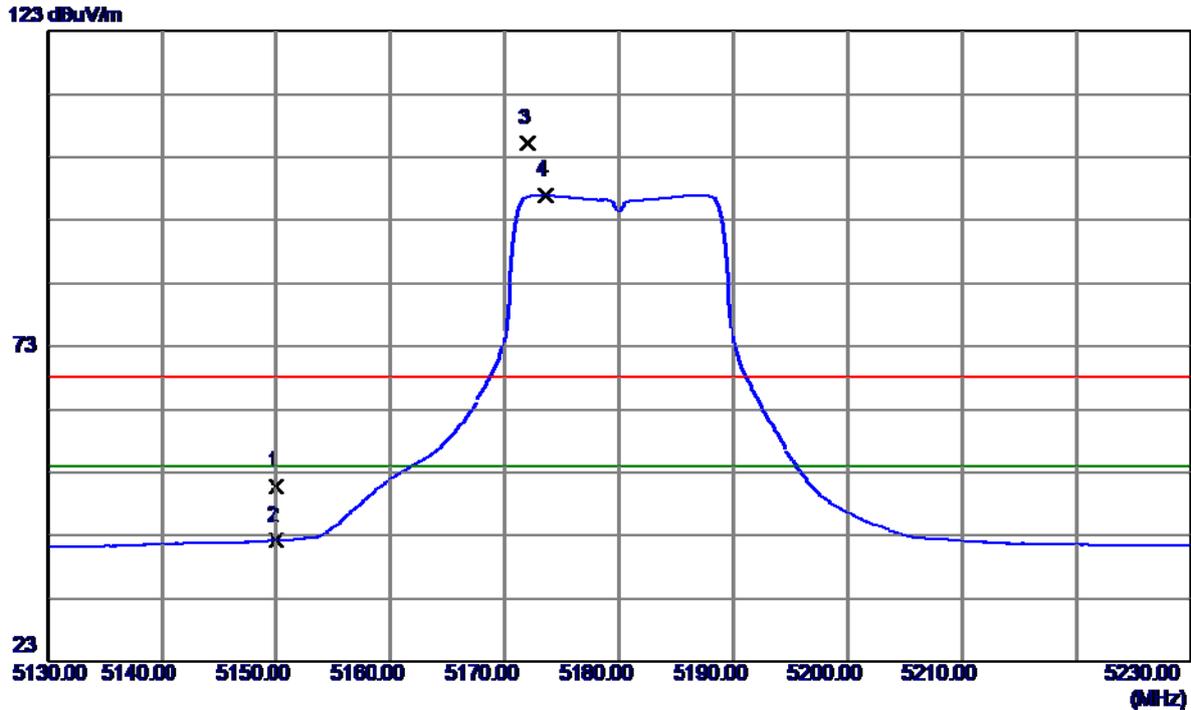

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	10.58	40.22	50.80	68.30	-17.50	Peak	
2	5150.0000	1.98	40.22	42.20	54.00	-11.80	AVG	
3	5172.0000	64.87	40.26	105.13	68.30	36.83	Peak	no limit
4	5173.6000	56.74	40.27	97.01	54.00	43.01	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Vertical

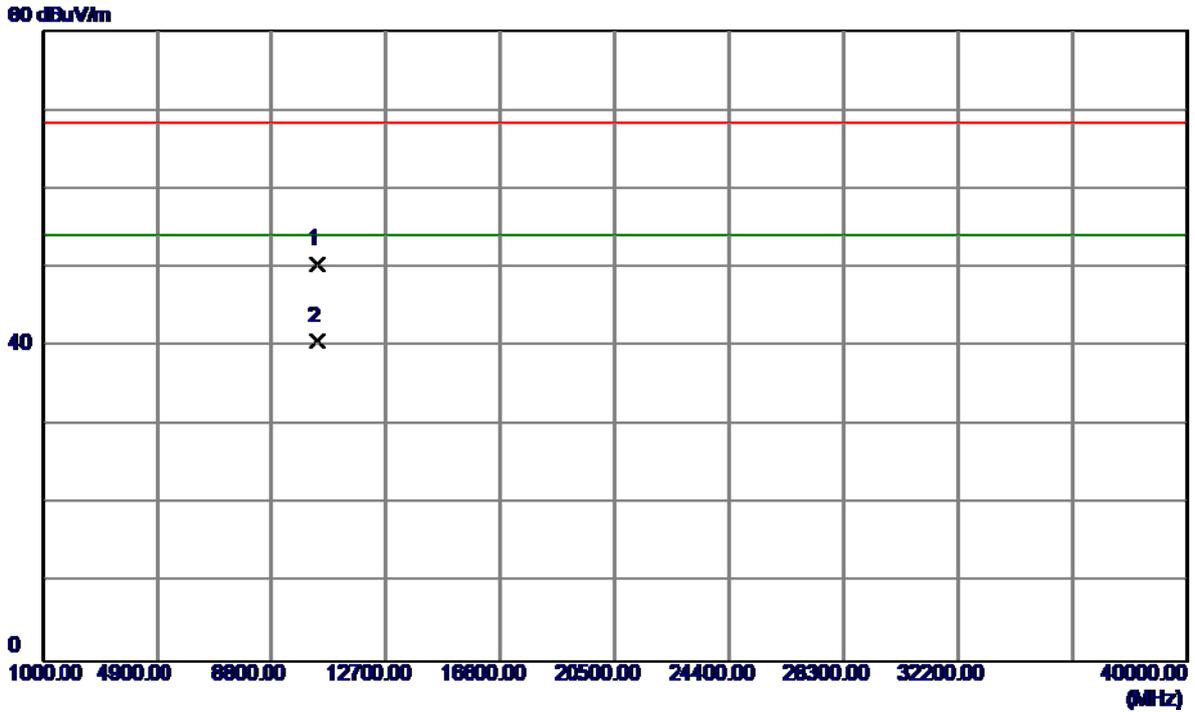

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.2800	36.52	13.86	50.38	68.30	-17.92	Peak	
2	10360.2800	26.80	13.86	40.66	54.00	-13.34	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

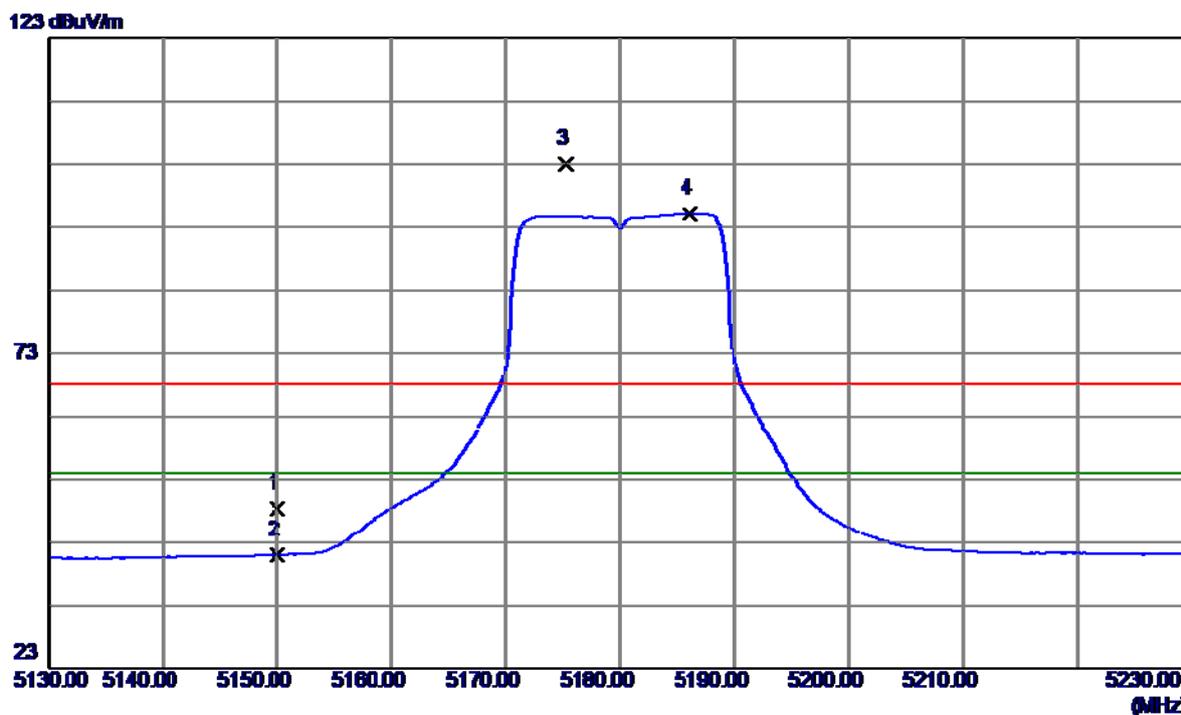

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	8.10	40.22	48.32	68.30	-19.98	Peak	
2	5150.0000	0.82	40.22	41.04	54.00	-12.96	AVG	
3	5175.2000	62.75	40.27	103.02	68.30	34.72	Peak	no limit
4	5186.1000	54.98	40.29	95.27	54.00	41.27	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5180MHz


Horizontal

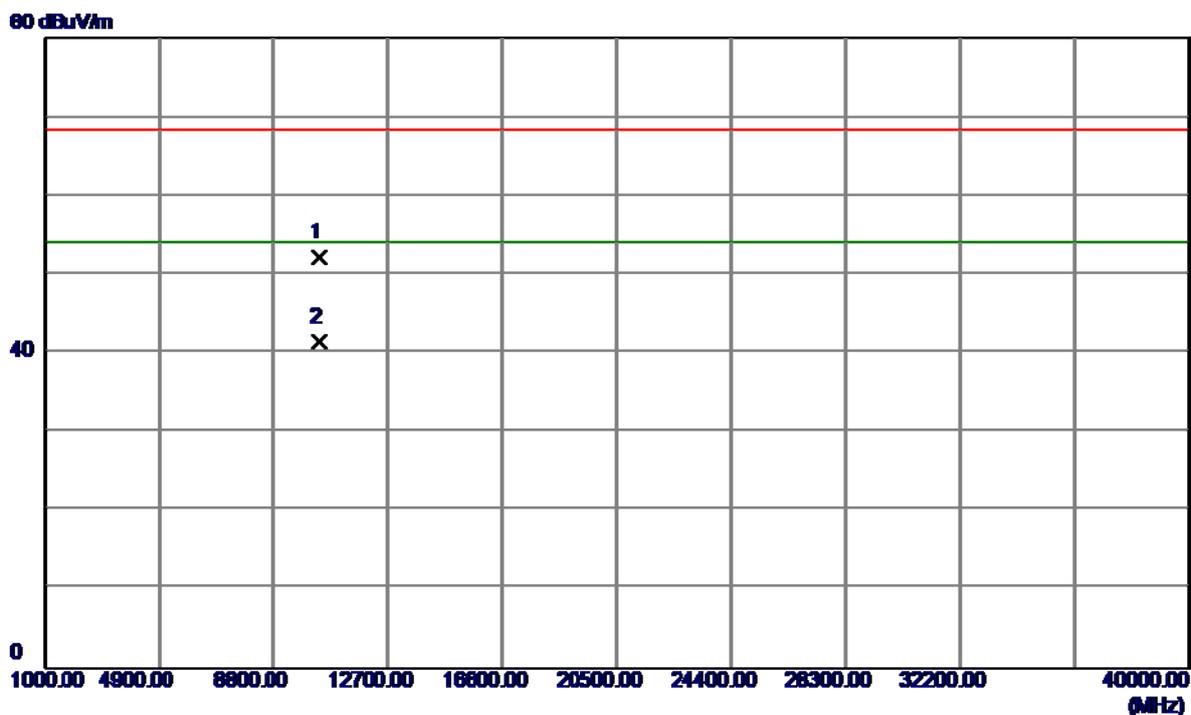

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10360.2800	38.30	13.86	52.16	68.30	-16.14	Peak	
2	10360.2800	27.52	13.86	41.38	54.00	-12.62	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

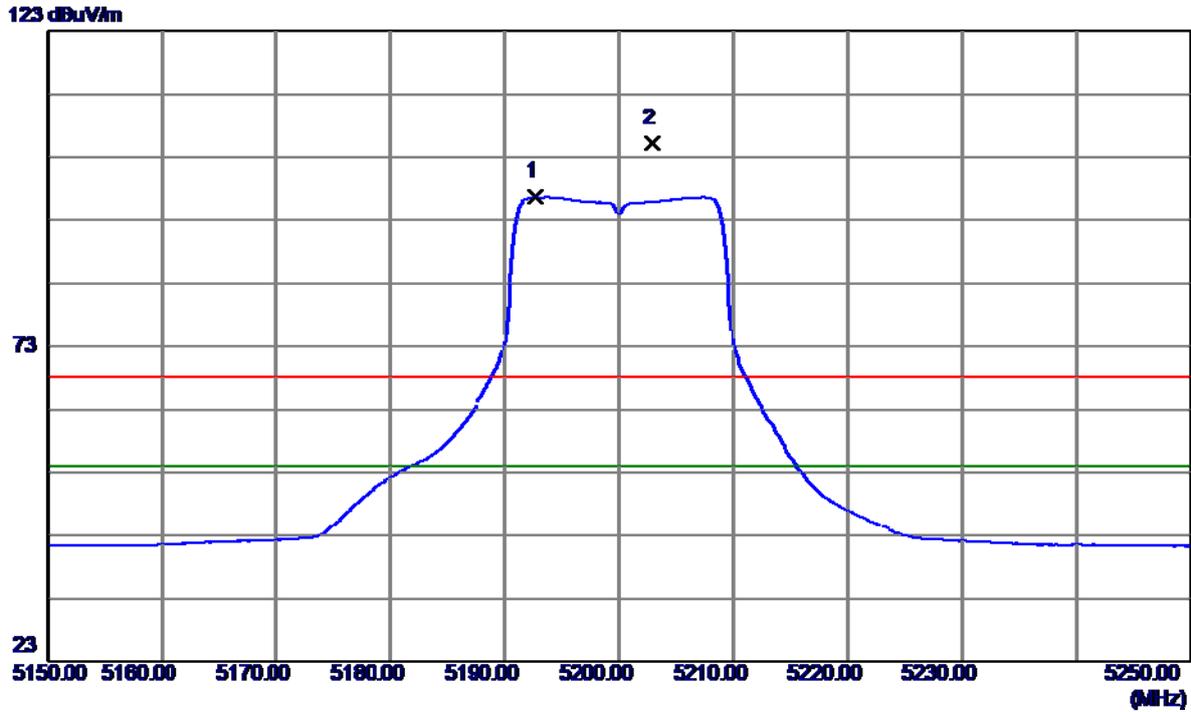

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5192.7000	56.42	40.31	96.73	54.00	42.73	AVG	no limit
2	5202.9000	64.93	40.33	105.26	68.30	36.96	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Vertical

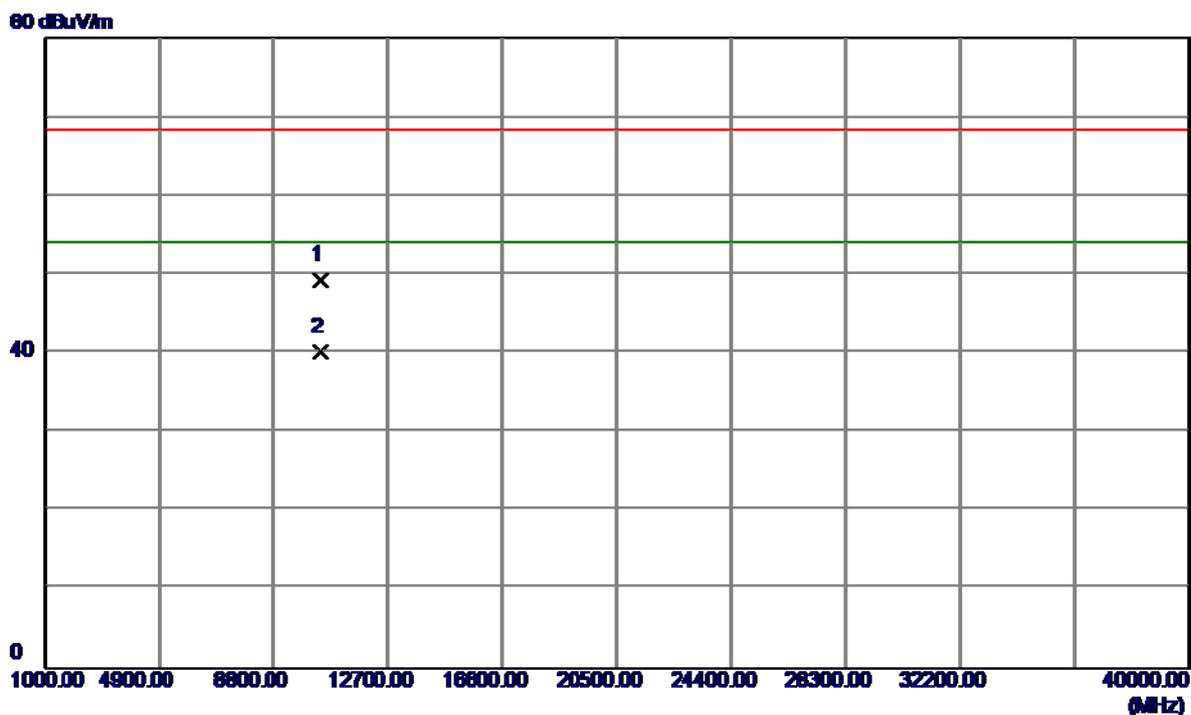

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.1800	35.48	13.80	49.28	68.30	-19.02	Peak	
2	10400.1800	26.36	13.80	40.16	54.00	-13.84	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz


Horizontal

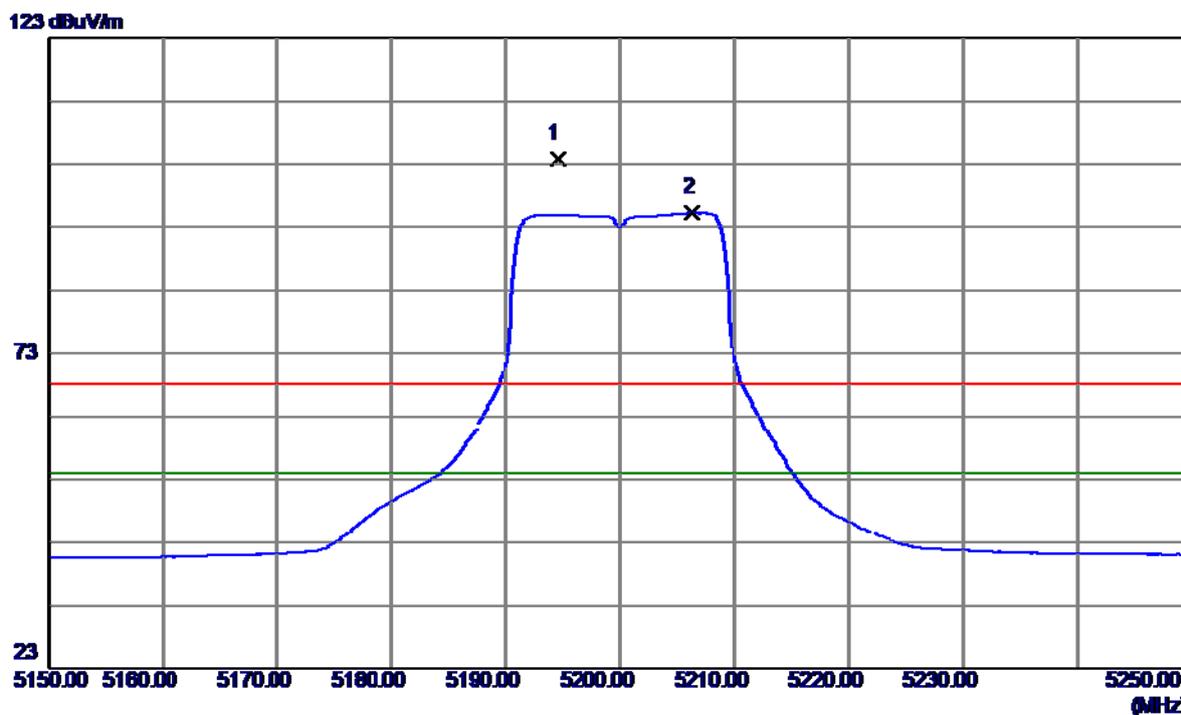

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5194.5000	63.48	40.31	103.79	68.30	35.49	Peak	no limit
2	5206.3000	55.03	40.34	95.37	54.00	41.37	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5200MHz

Horizontal

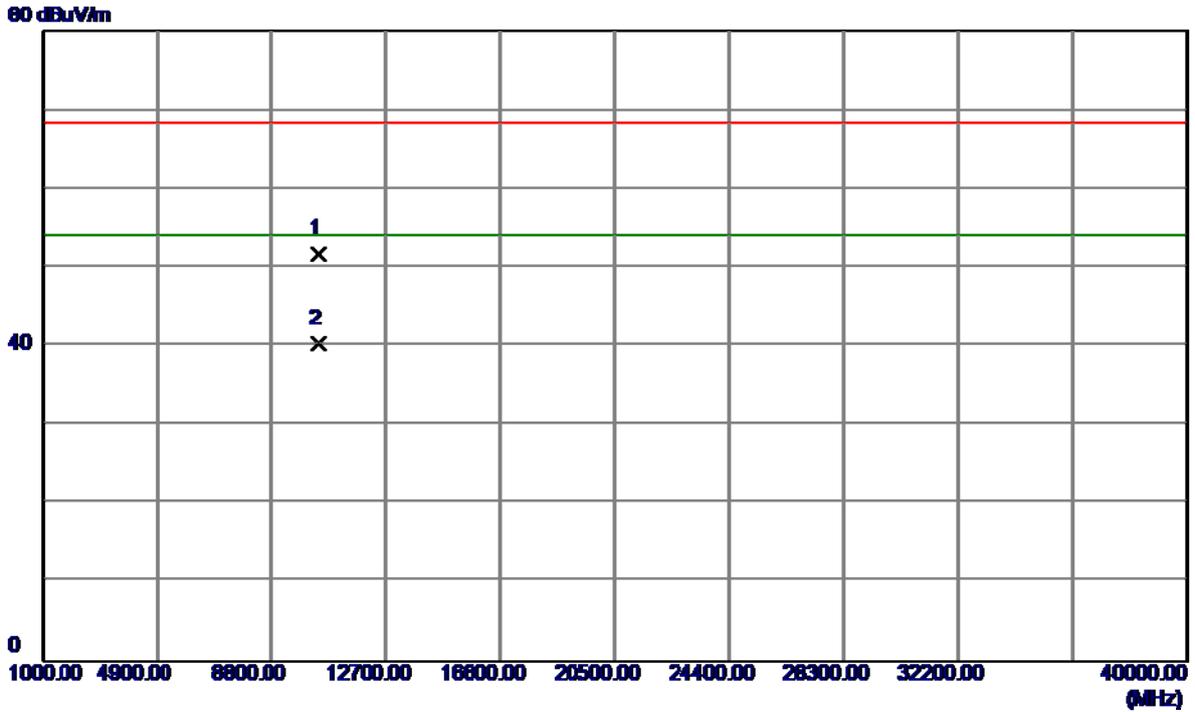


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10400.2699	37.87	13.80	51.67	68.30	-16.63	Peak	
2	10400.2699	26.51	13.80	40.31	54.00	-13.69	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Vertical


123 dBuV/m

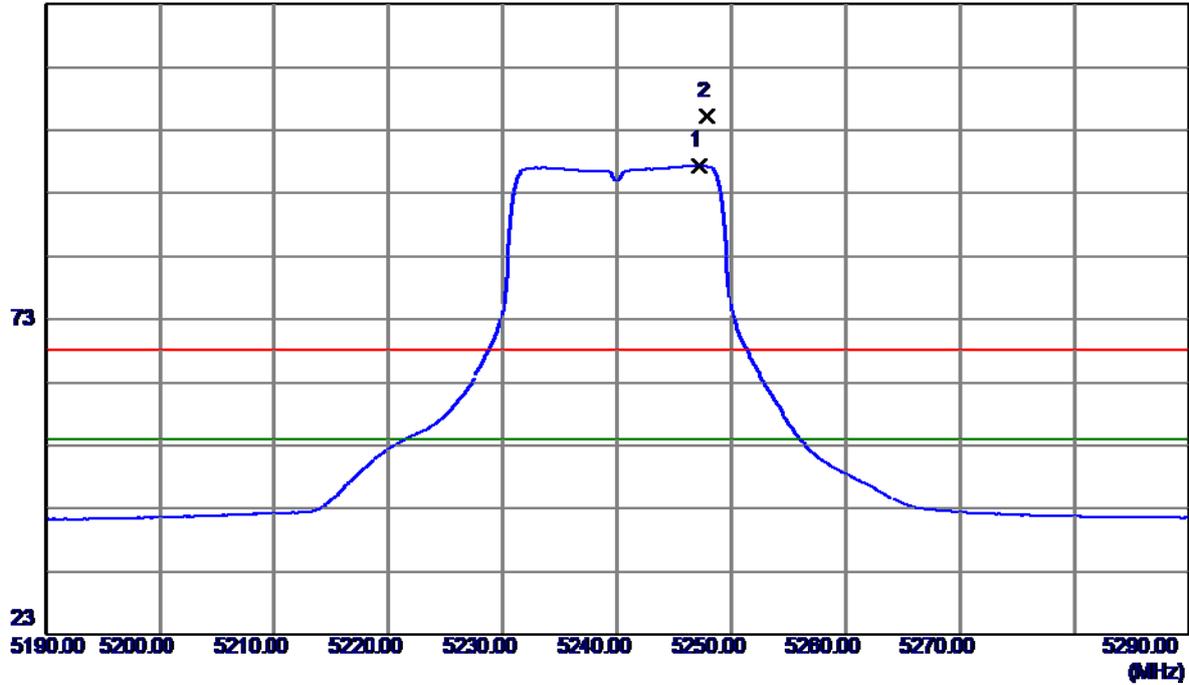

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5247.2000	56.98	40.42	97.40	54.00	43.40	AVG	no limit
2	5247.9000	64.77	40.43	105.20	68.30	36.90	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Vertical

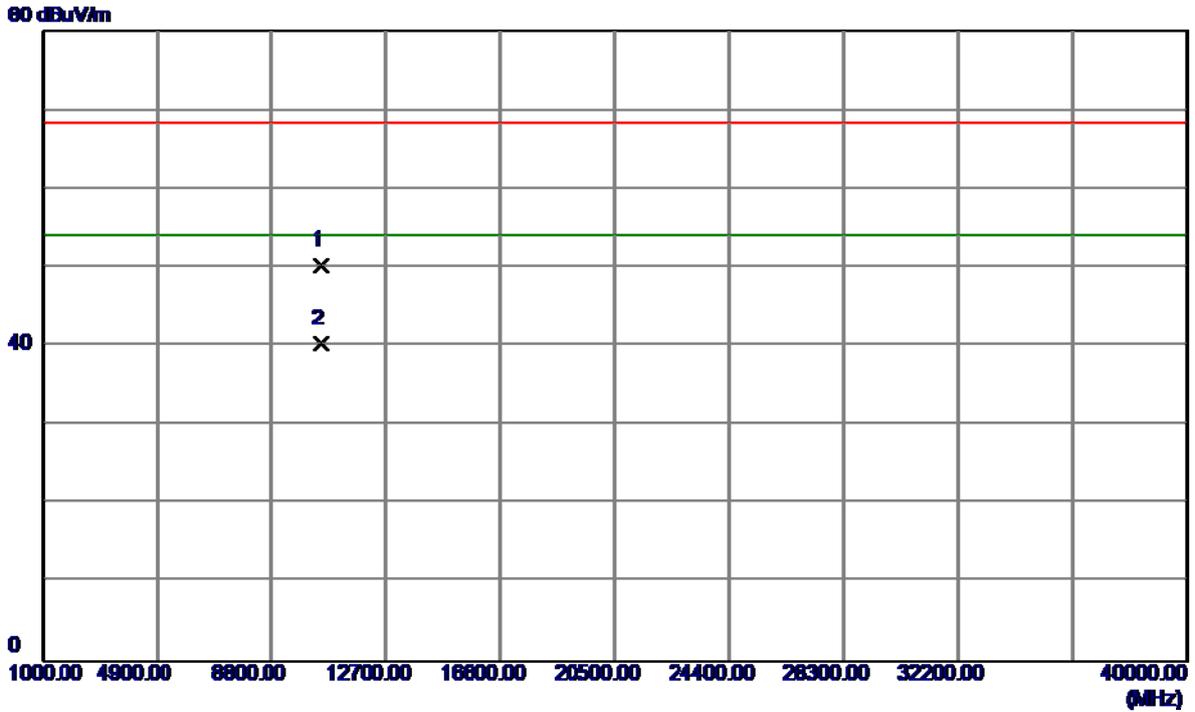

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.3400	36.53	13.69	50.22	68.30	-18.08	Peak	
2	10480.3400	26.70	13.69	40.39	54.00	-13.61	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz


Horizontal

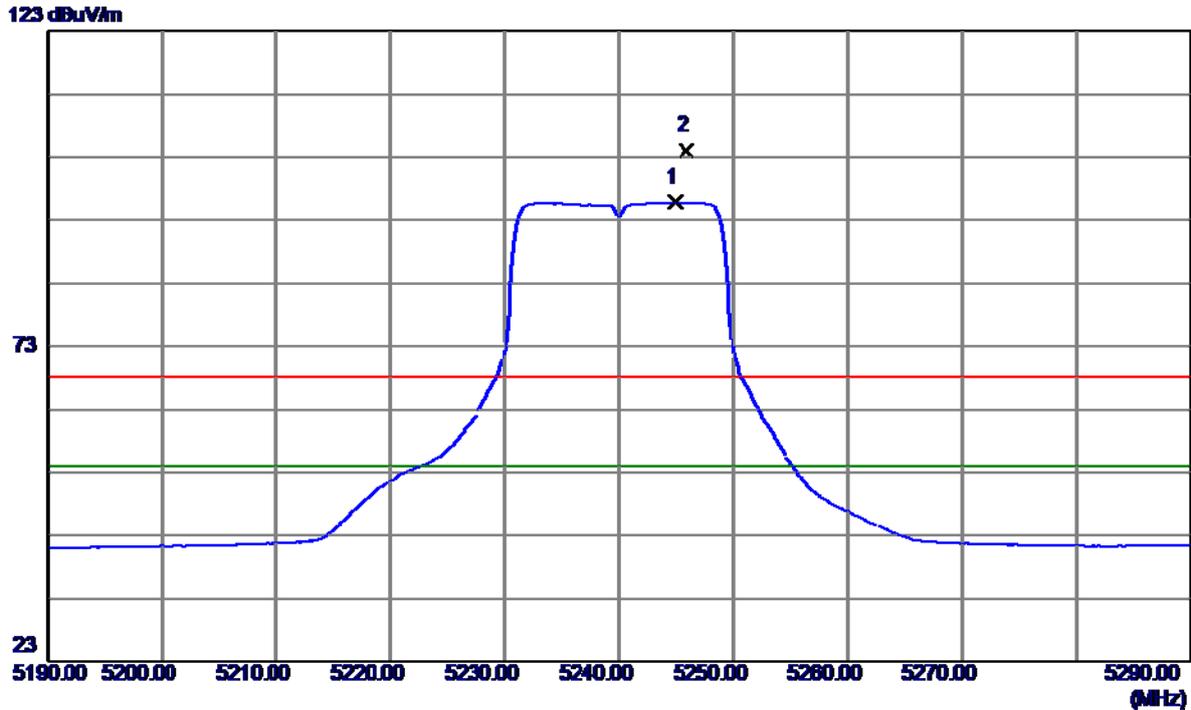

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5244.9000	55.48	40.42	95.90	54.00	41.90	AVG	no limit
2	5245.9000	63.61	40.42	104.03	68.30	35.73	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC20 Mode 5240MHz

Horizontal

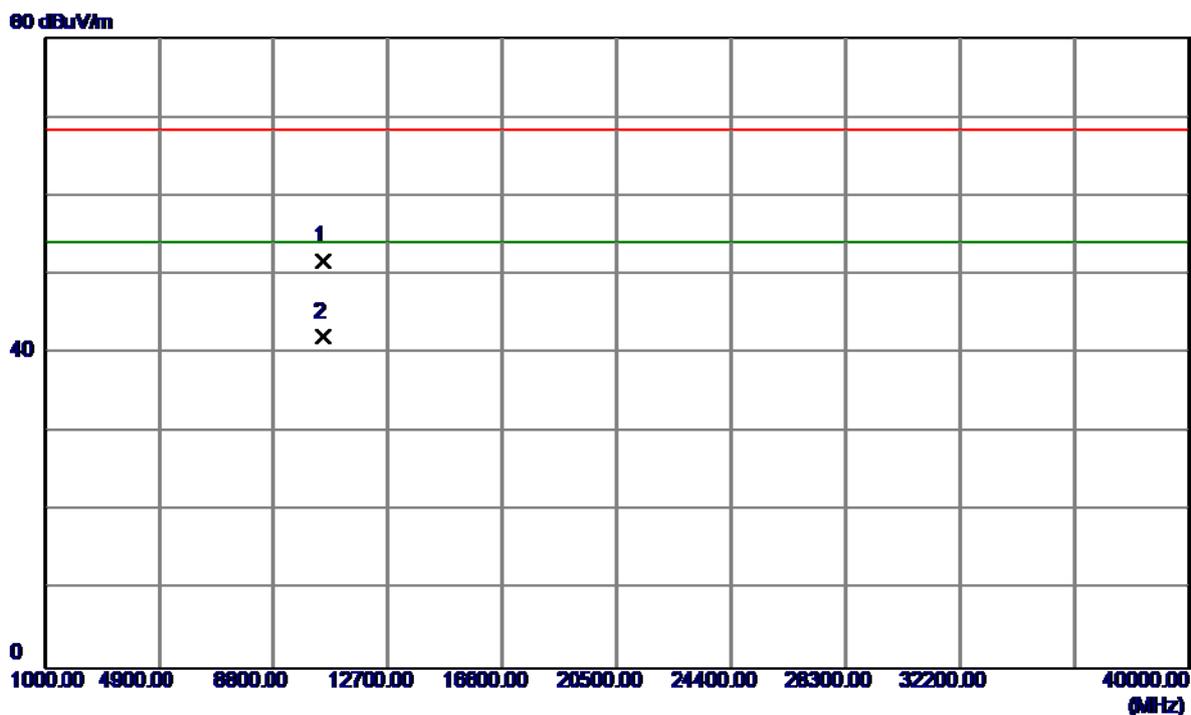


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10480.7699	37.98	13.69	51.67	68.30	-16.63	Peak	
2	10480.7699	28.34	13.69	42.03	54.00	-11.97	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz

Vertical


123 dBuV/m

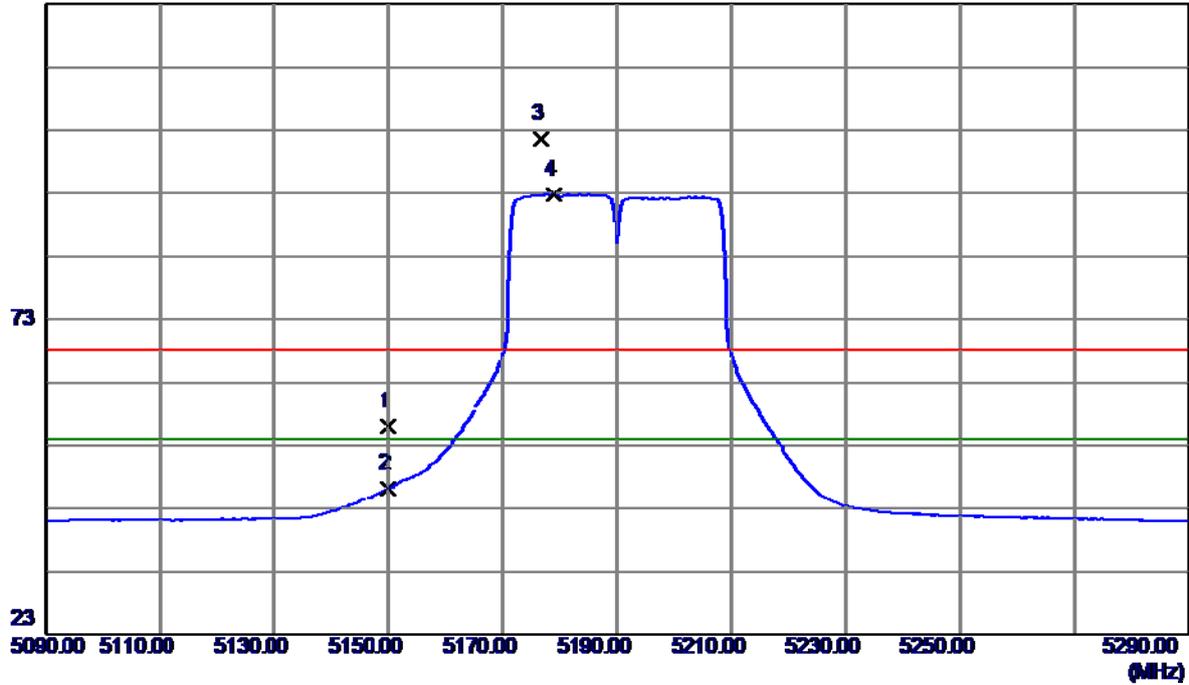

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	15.87	40.22	56.09	68.30	-12.21	Peak	
2	5150.0000	5.97	40.22	46.19	54.00	-7.81	AVG	
3	5176.6000	61.28	40.27	101.55	68.30	33.25	Peak	no limit
4	5178.8000	52.51	40.28	92.79	54.00	38.79	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Vertical

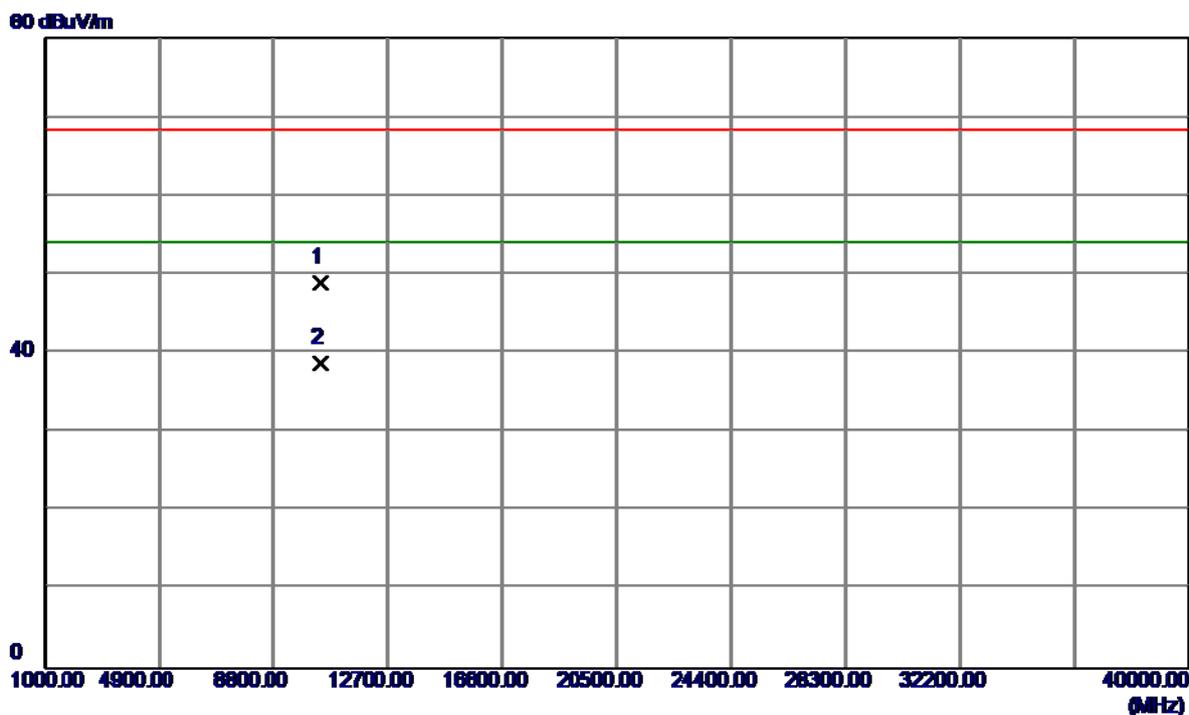

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10381.6700	35.20	13.83	49.03	68.30	-19.27	Peak	
2	10381.6700	24.84	13.83	38.67	54.00	-15.33	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

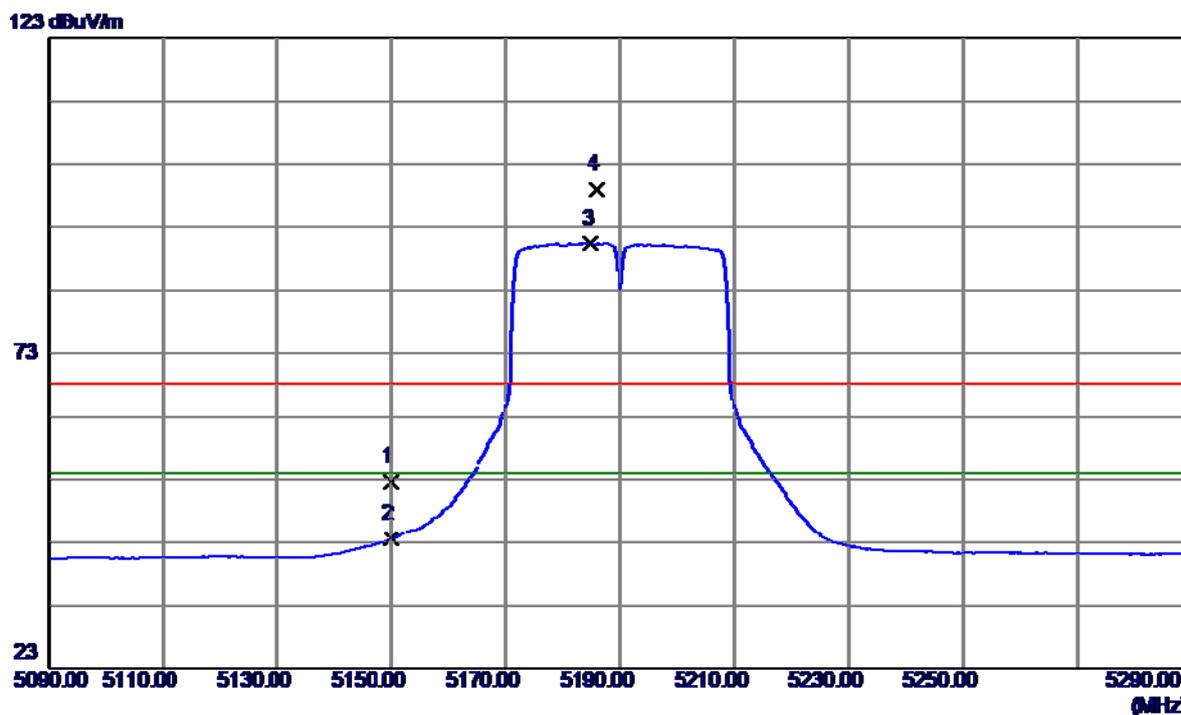

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	12.44	40.22	52.66	68.30	-15.64	Peak	
2	5150.0000	3.36	40.22	43.58	54.00	-10.42	AVG	
3	5185.0000	50.13	40.29	90.42	54.00	36.42	AVG	no limit
4	5186.0000	58.65	40.29	98.94	68.30	30.64	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5190MHz


Horizontal

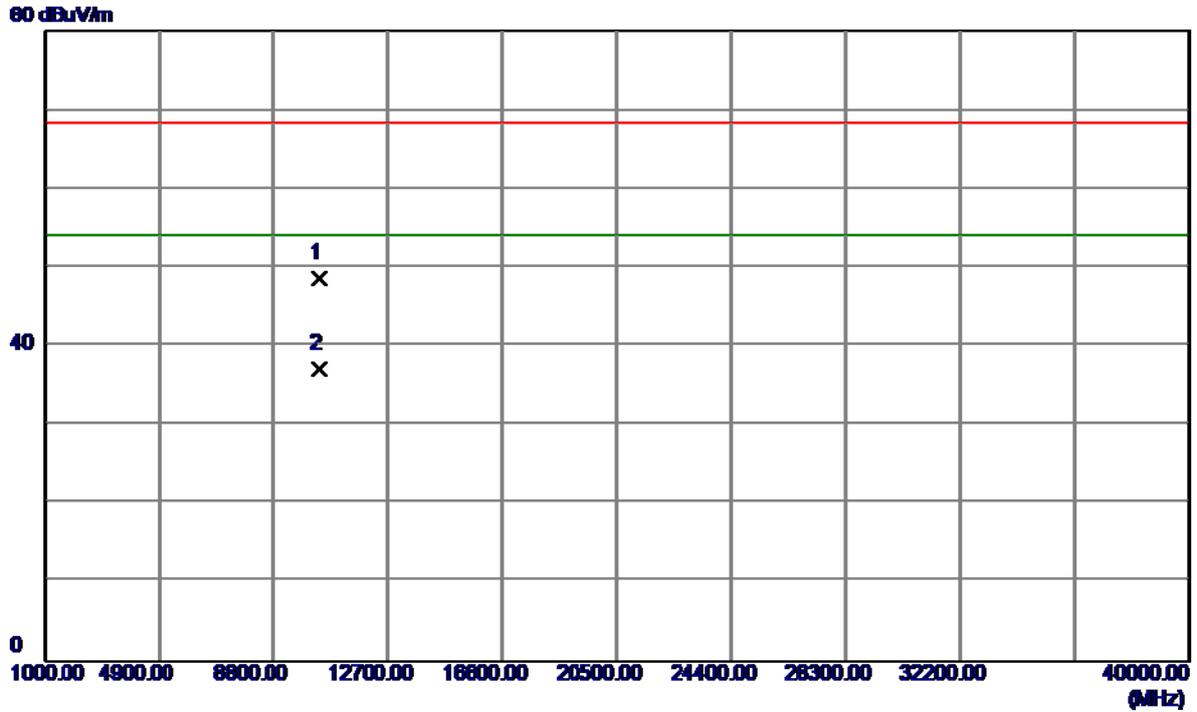

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10381.5199	34.86	13.83	48.69	68.30	-19.61	Peak	
2	10381.5199	23.32	13.83	37.15	54.00	-16.85	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

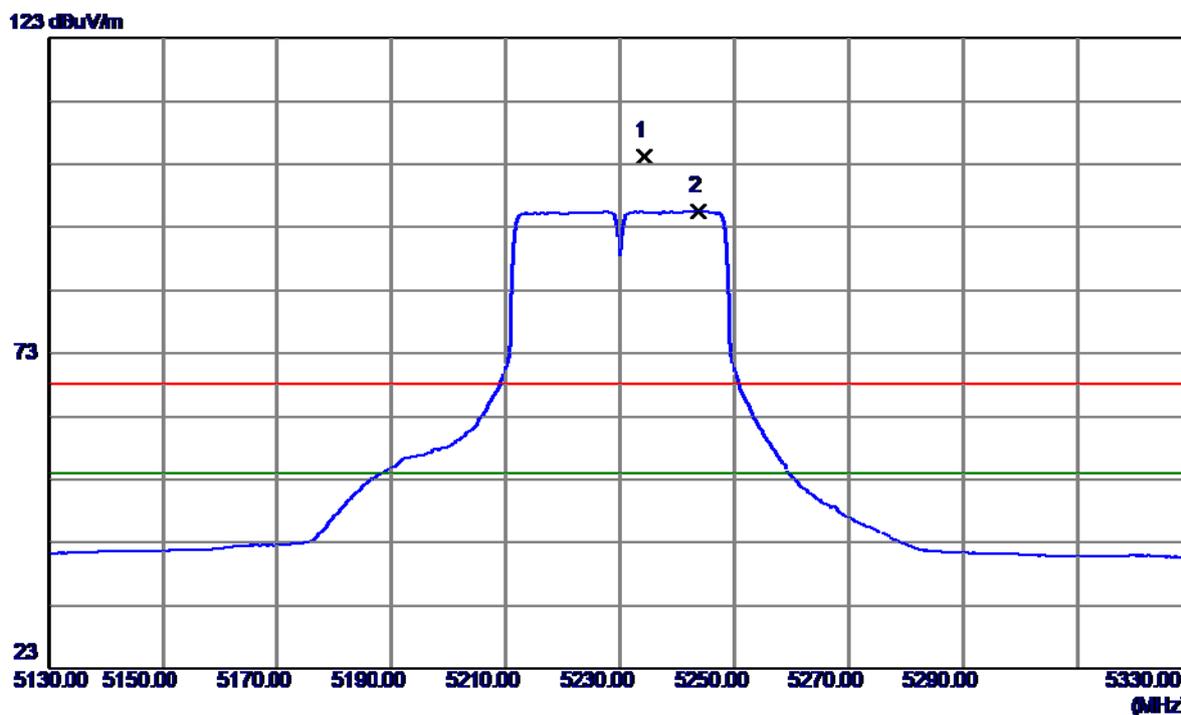

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5234.2000	63.71	40.40	104.11	68.30	35.81	Peak	no limit
2	5243.8000	55.23	40.42	95.65	54.00	41.65	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Vertical

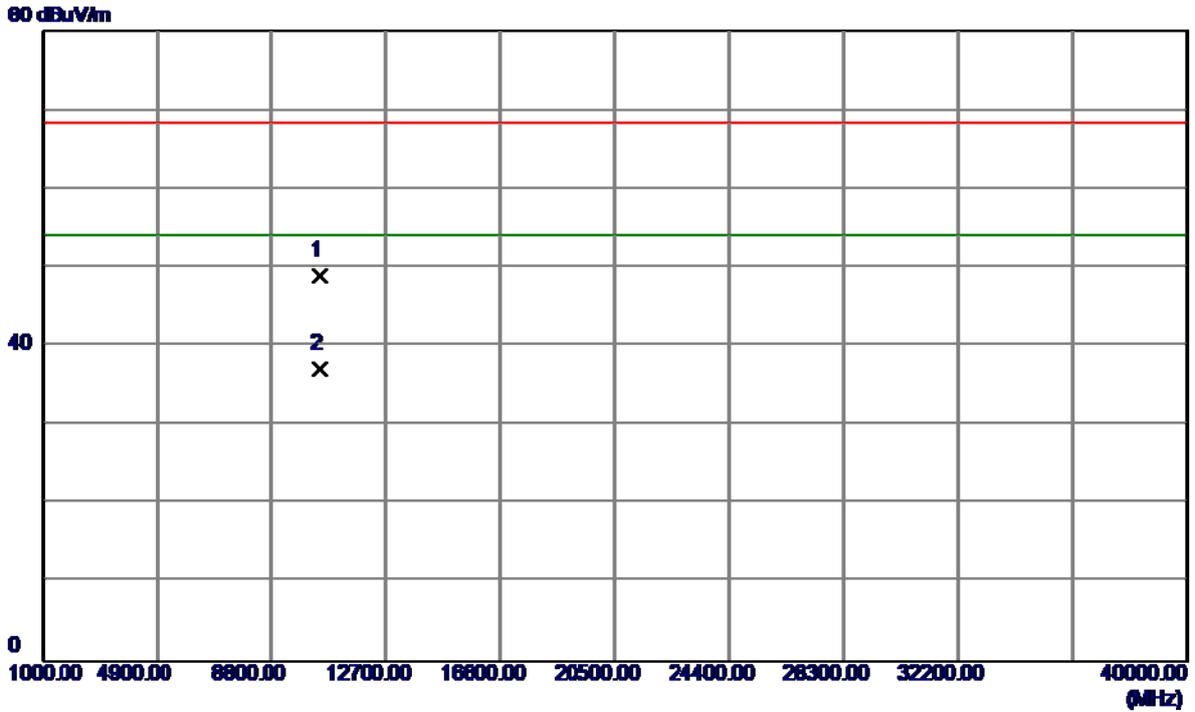

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10463.6400	35.26	13.71	48.97	68.30	-19.33	Peak	
2	10463.6400	23.35	13.71	37.06	54.00	-16.94	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

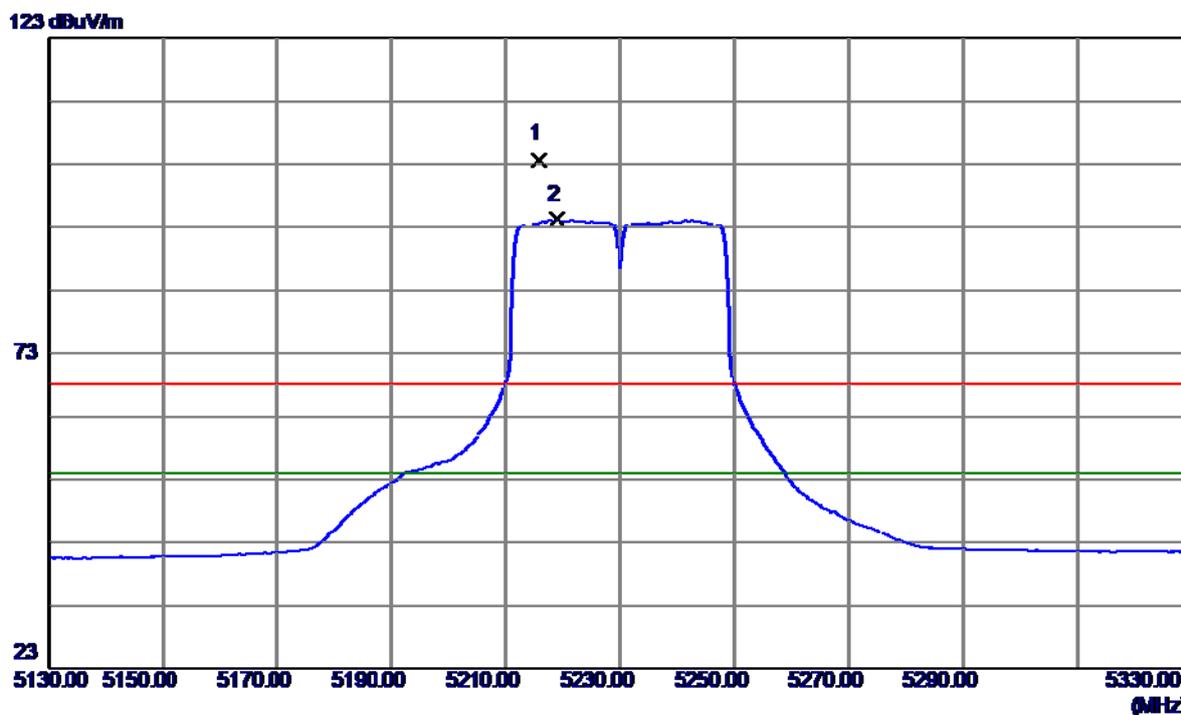

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5215.8000	63.34	40.36	103.70	68.30	35.40	Peak	no limit
2	5218.8000	53.94	40.36	94.30	54.00	40.30	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC40 Mode 5230MHz


Horizontal

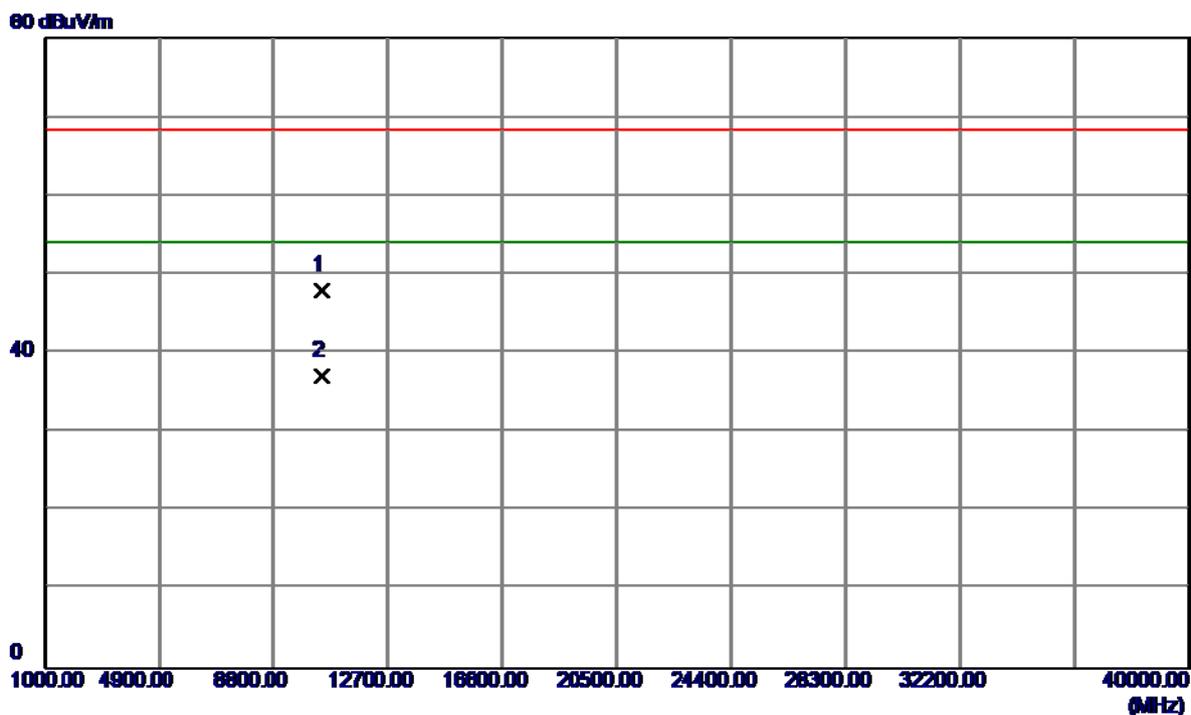

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10460.7200	34.31	13.72	48.03	68.30	-20.27	Peak	
2	10460.7200	23.43	13.72	37.15	54.00	-16.85	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Vertical

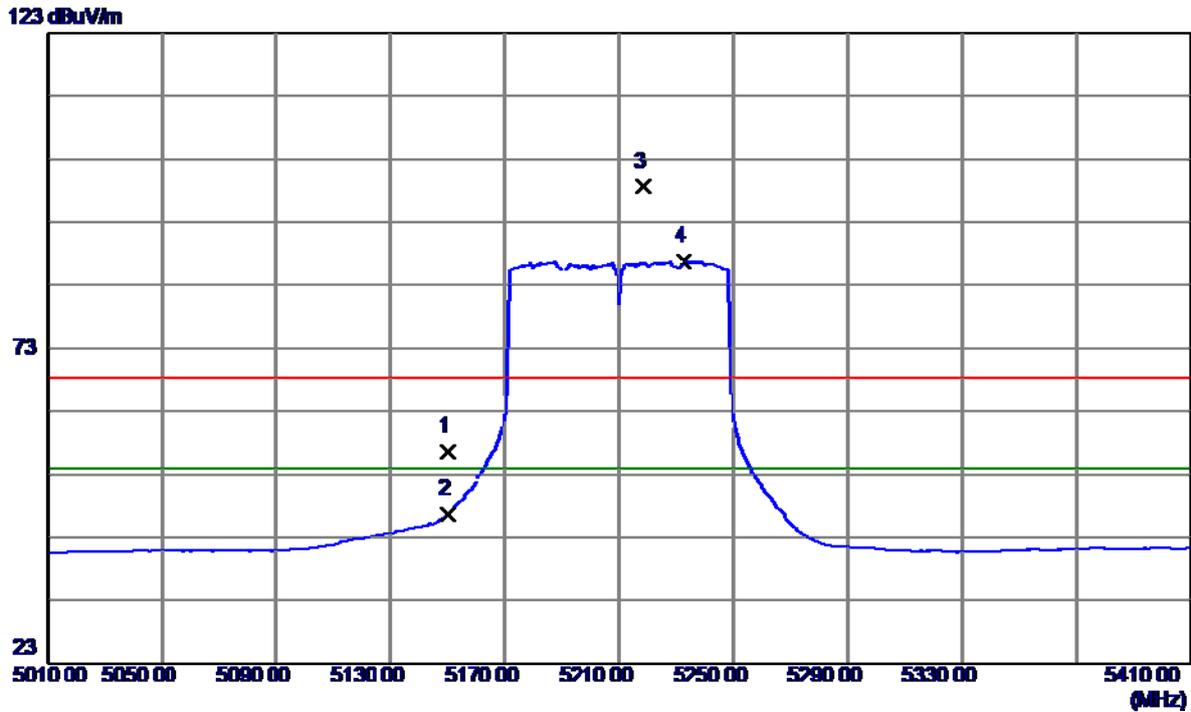

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	16.32	40.22	56.54	68.30	-11.76	Peak	
2	5150.0000	6.44	40.22	46.66	54.00	-7.34	AVG	
3	5218.4000	58.32	40.36	98.68	68.30	30.38	Peak	no limit
4	5232.8000	46.49	40.39	86.88	54.00	32.88	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Vertical

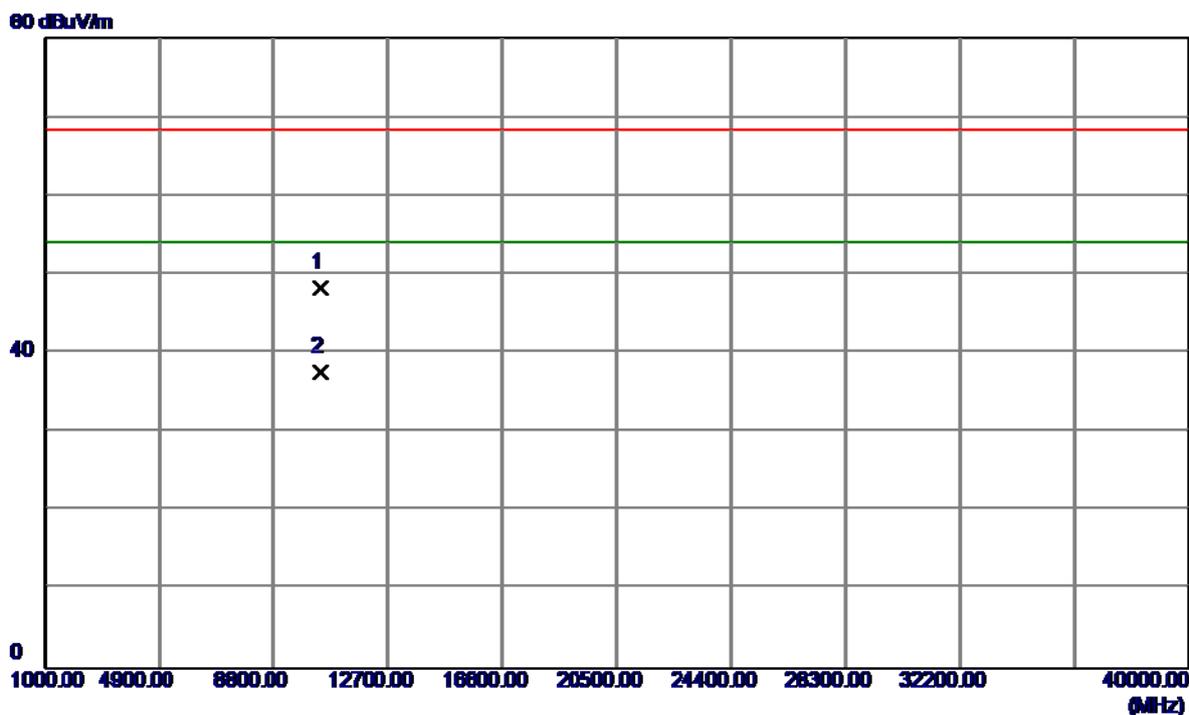


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10422.9300	34.57	13.77	48.34	68.30	-19.96	Peak	
2	10422.9300	23.84	13.77	37.61	54.00	-16.39	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz

Horizontal


123 dBuV/m

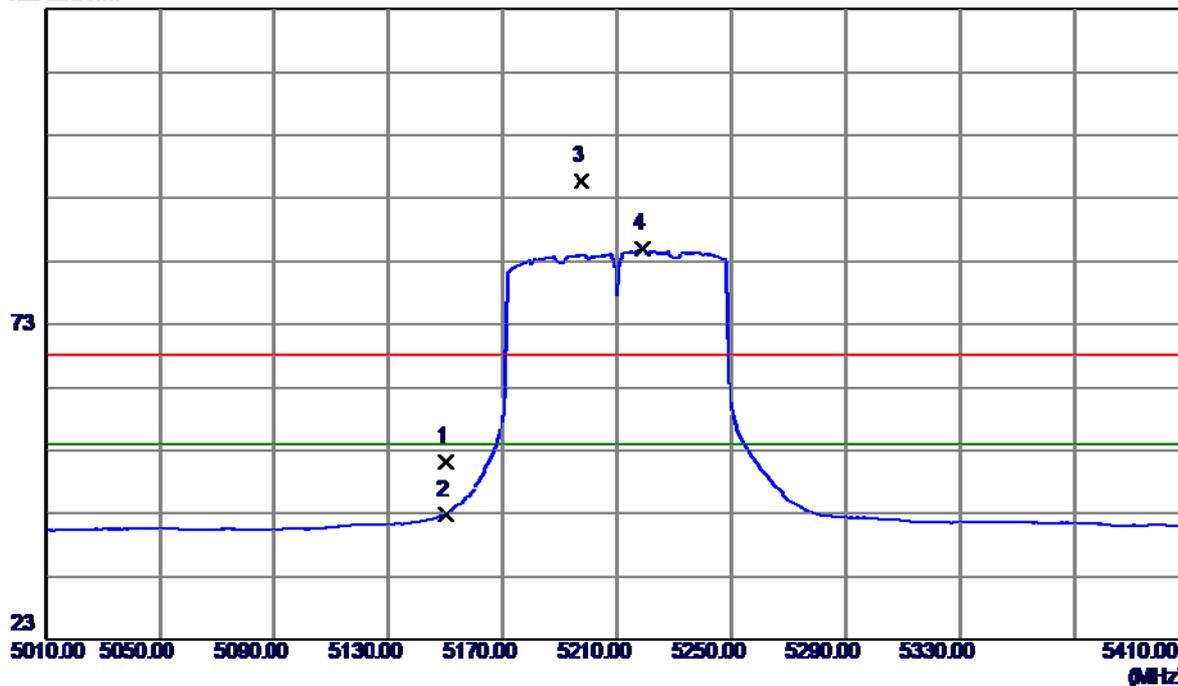

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5150.0000	11.00	40.22	51.22	68.30	-17.08	Peak	
2	5150.0000	2.65	40.22	42.87	54.00	-11.13	AVG	
3	5197.6000	55.44	40.32	95.76	68.30	27.46	Peak	no limit
4	5218.8000	44.56	40.36	84.92	54.00	30.92	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX AC80 Mode 5210MHz


Horizontal

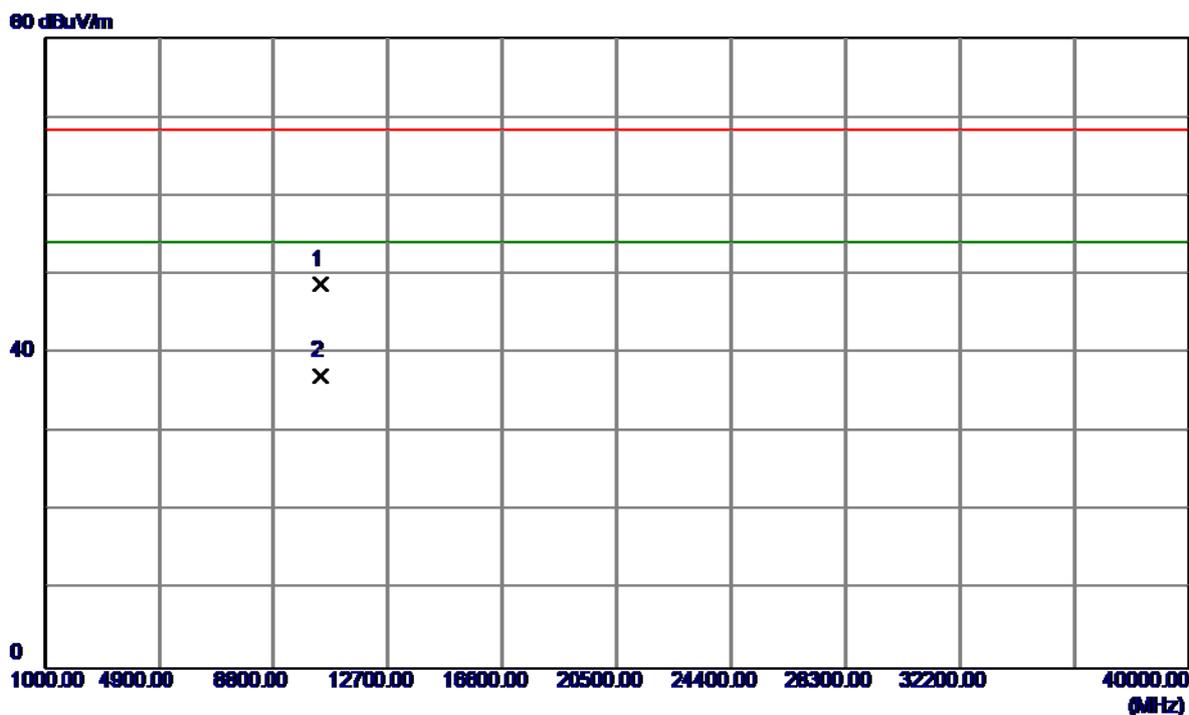

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10421.8700	34.95	13.77	48.72	68.30	-19.58	Peak	
2	10421.8700	23.29	13.77	37.06	54.00	-16.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

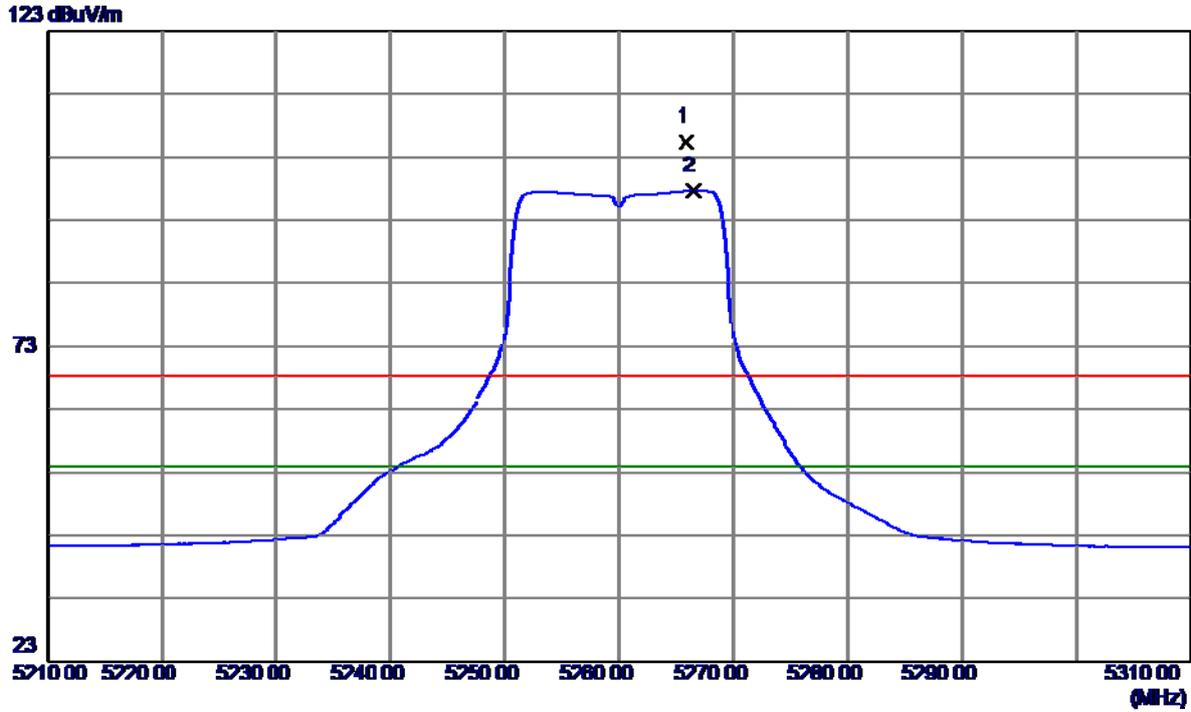

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5265.9000	64.99	40.46	105.45	68.30	37.15	Peak	no limit
2	5266.5000	57.16	40.46	97.62	54.00	43.62	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Vertical

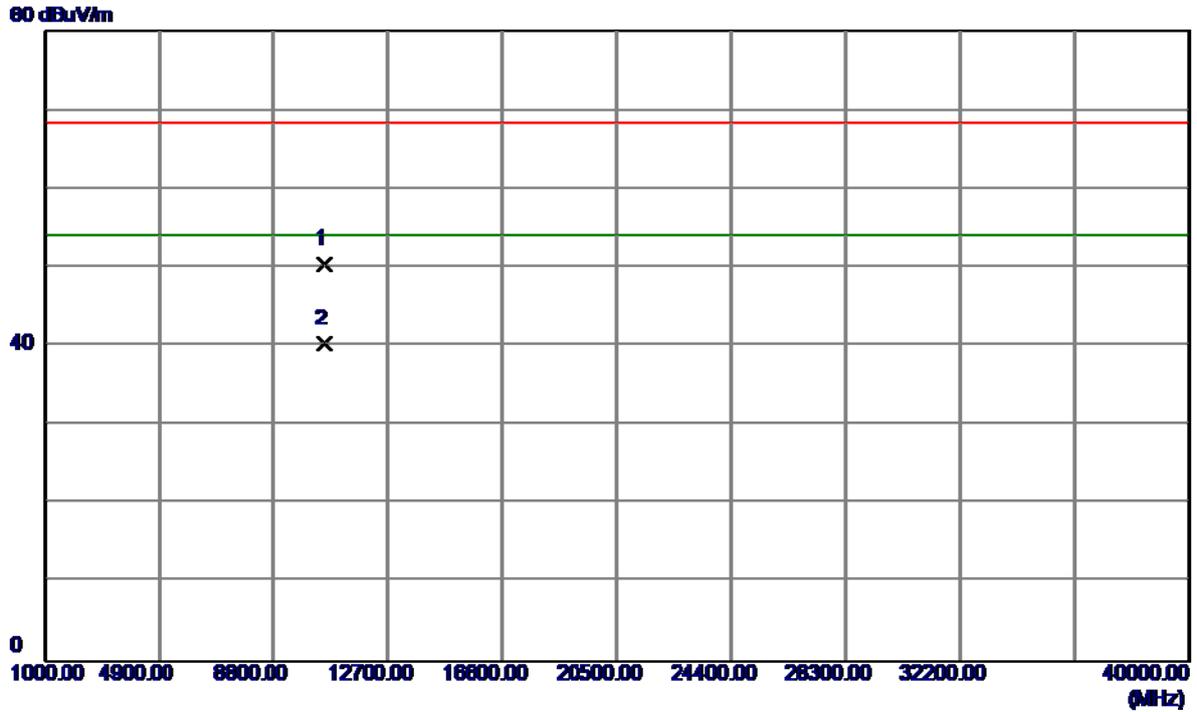

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10520.4500	36.58	13.75	50.33	68.30	-17.97	Peak	
2	10520.4500	26.53	13.75	40.28	54.00	-13.72	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

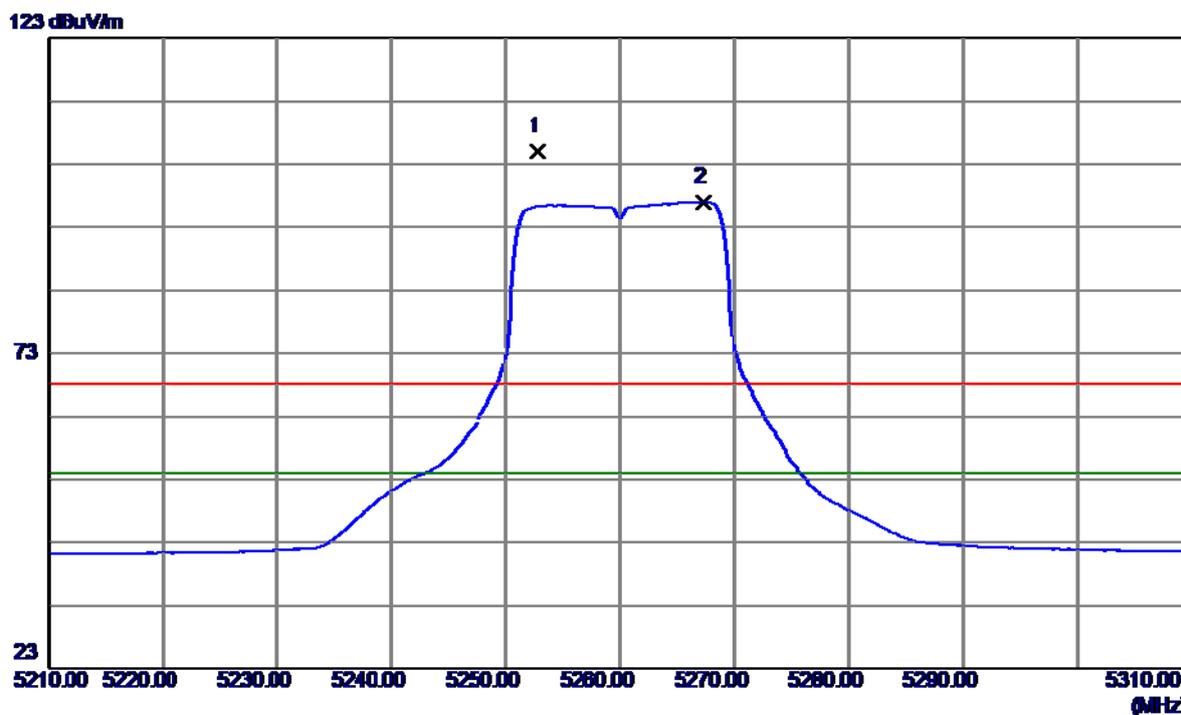

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5252.8000	64.59	40.44	105.03	68.30	36.73	Peak	no limit
2	5267.3000	56.58	40.47	97.05	54.00	43.05	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

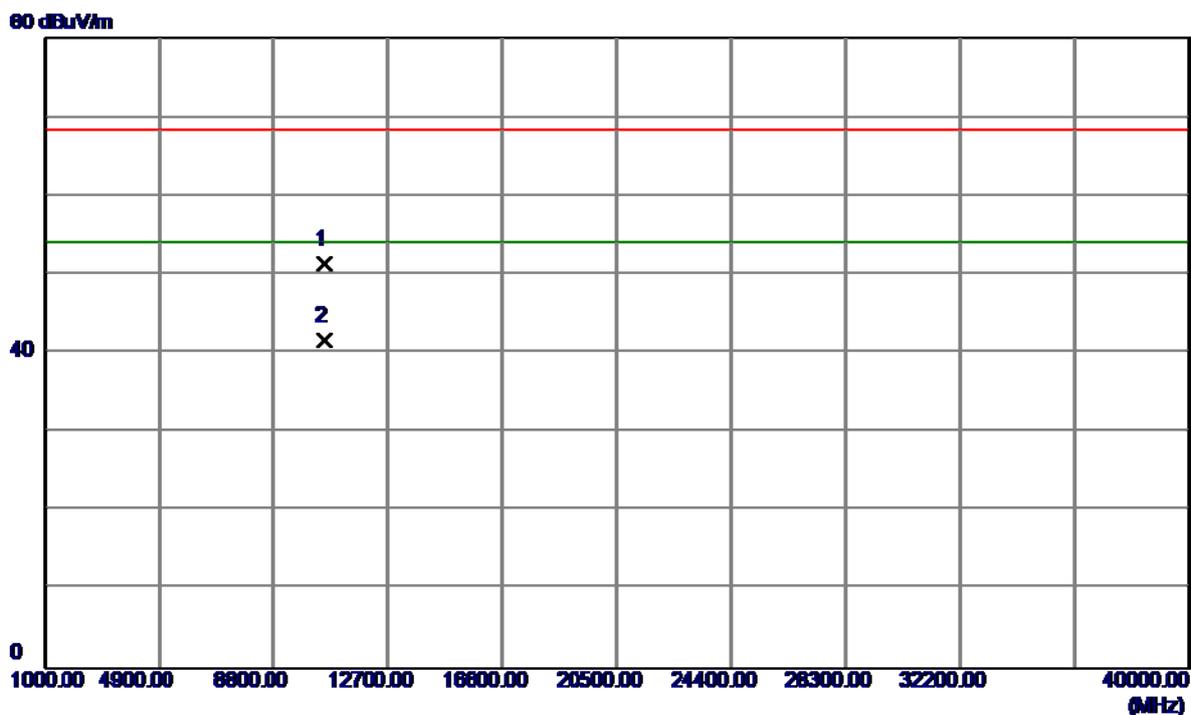

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10522.3400	37.52	13.76	51.28	68.30	-17.02	Peak	
2	10522.3400	27.91	13.76	41.67	54.00	-12.33	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Vertical

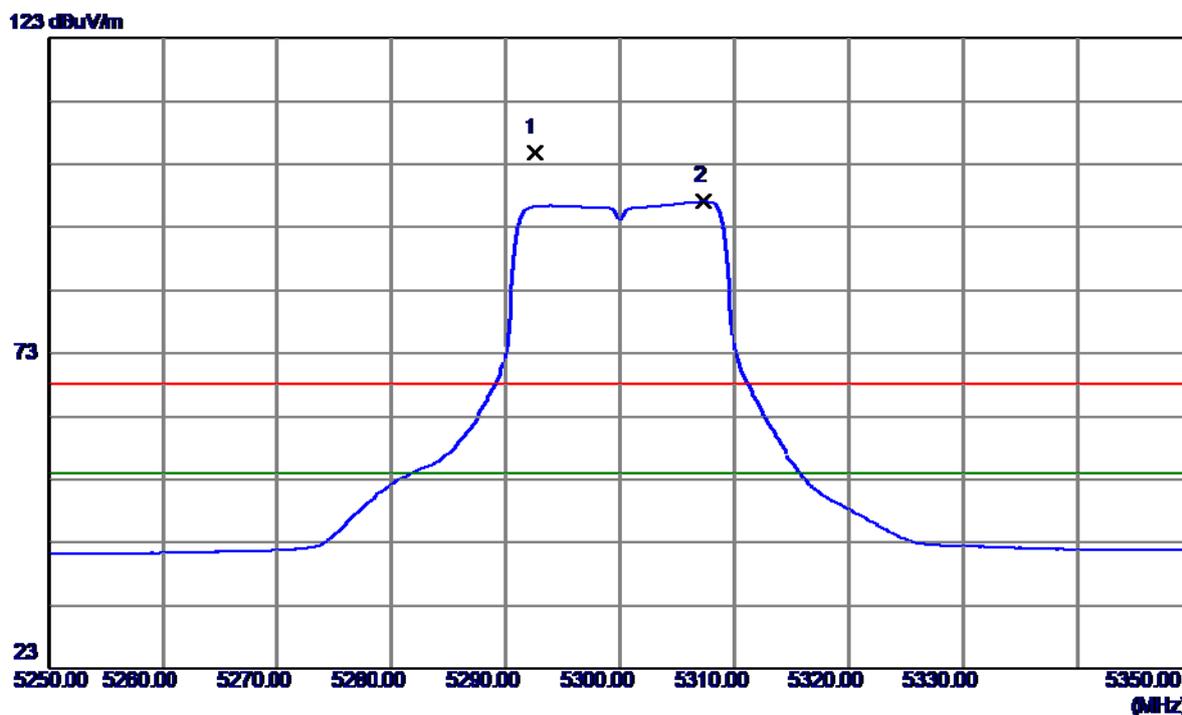

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5292.5000	64.34	40.52	104.86	68.30	36.56	Peak	no limit
2	5307.3000	56.61	40.55	97.16	54.00	43.16	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Vertical

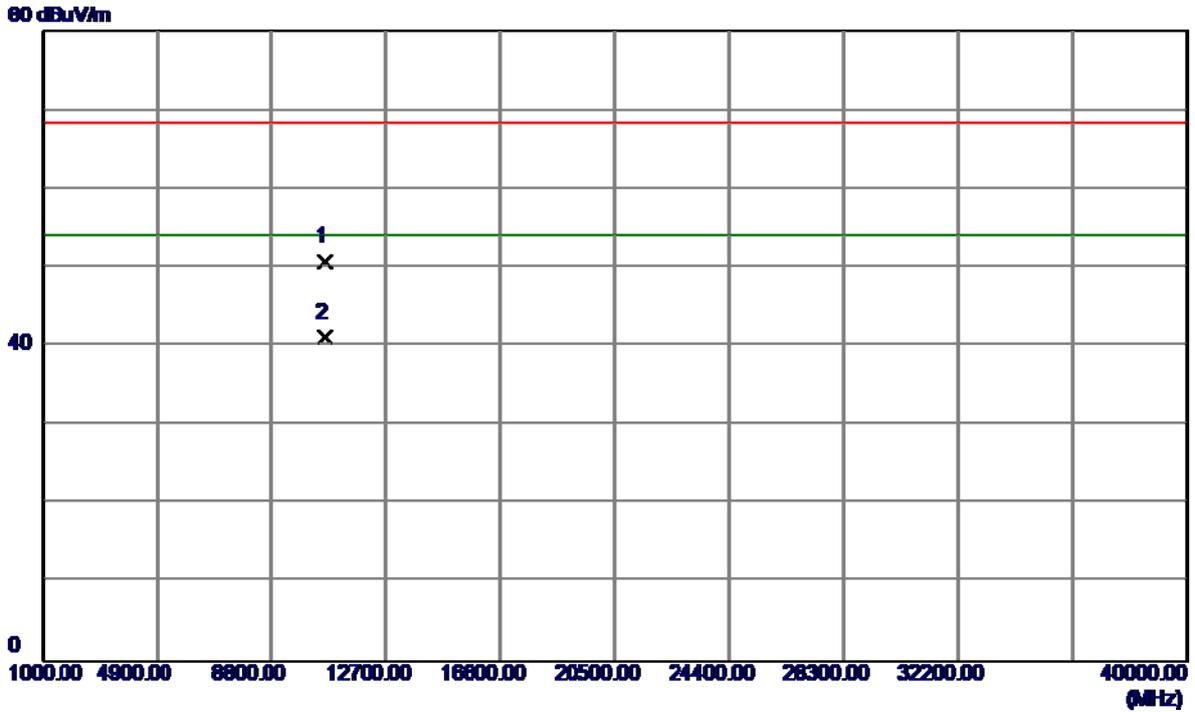

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10600.1700	36.71	14.08	50.79	68.30	-17.51	Peak	
2	10600.1700	26.98	14.08	41.06	54.00	-12.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Horizontal

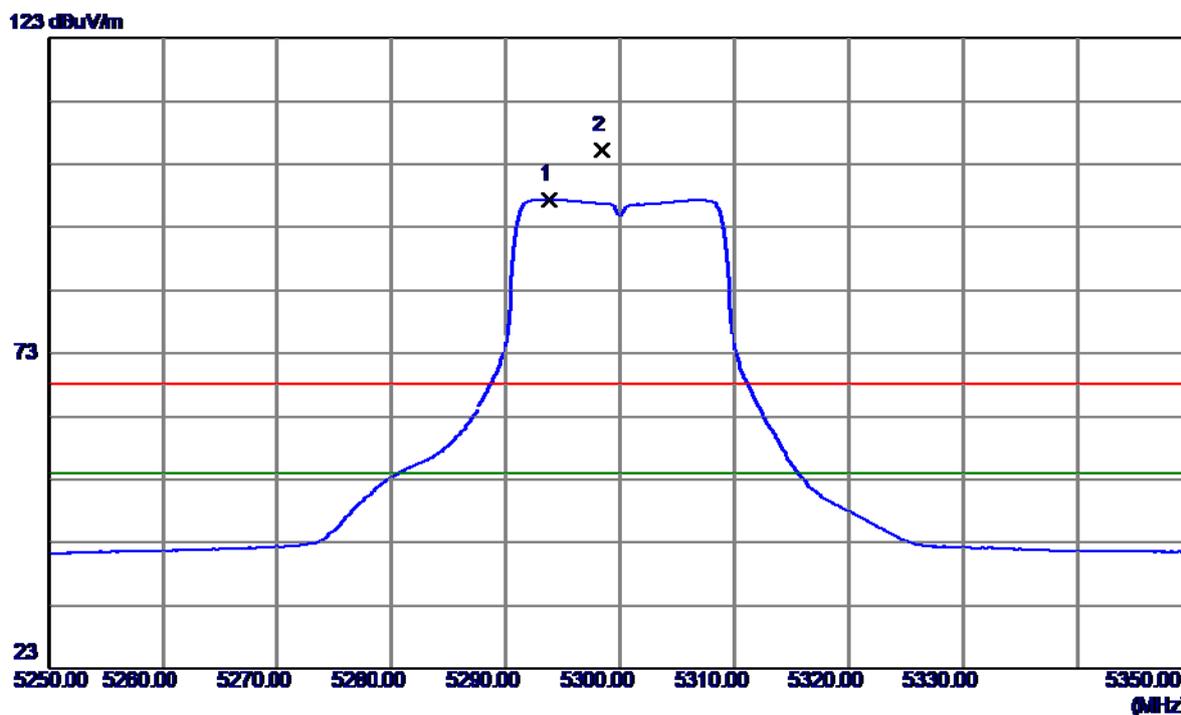

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5293.8000	56.96	40.52	97.48	54.00	43.48	AVG	no limit
2	5298.4000	64.75	40.53	105.28	68.30	36.98	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5300MHz


Horizontal

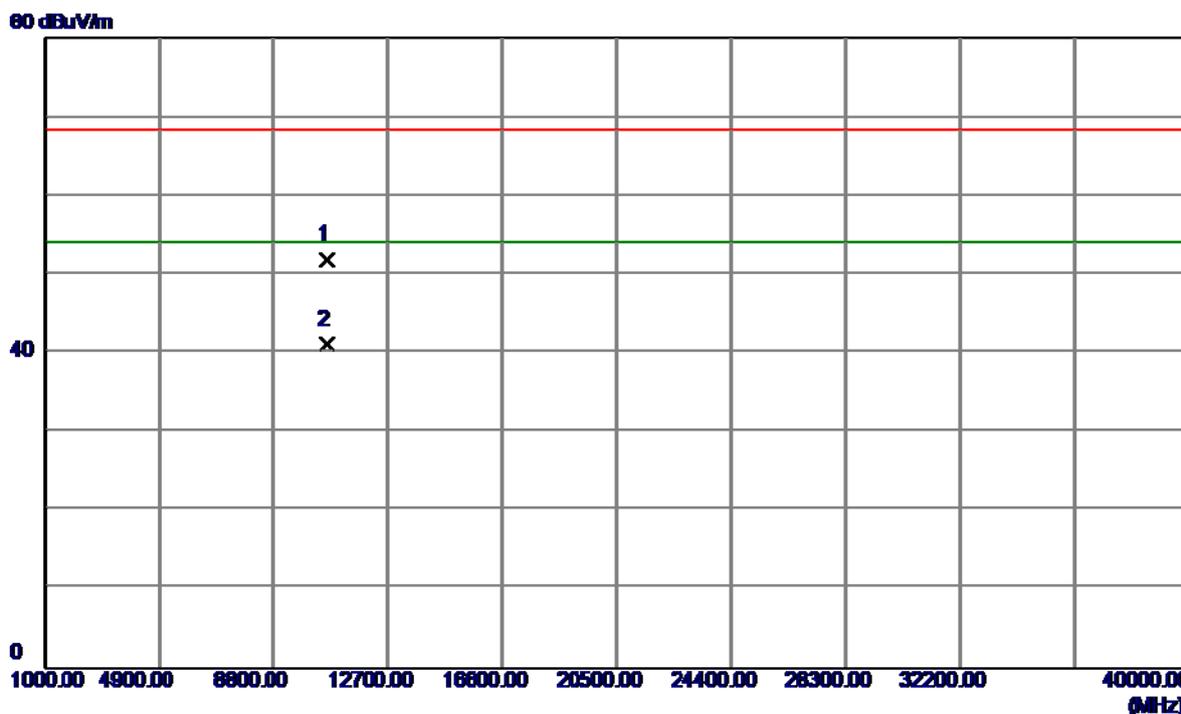

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10602.3400	37.76	14.09	51.85	68.30	-16.45	Peak	
2	10602.3400	27.06	14.09	41.15	54.00	-12.85	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

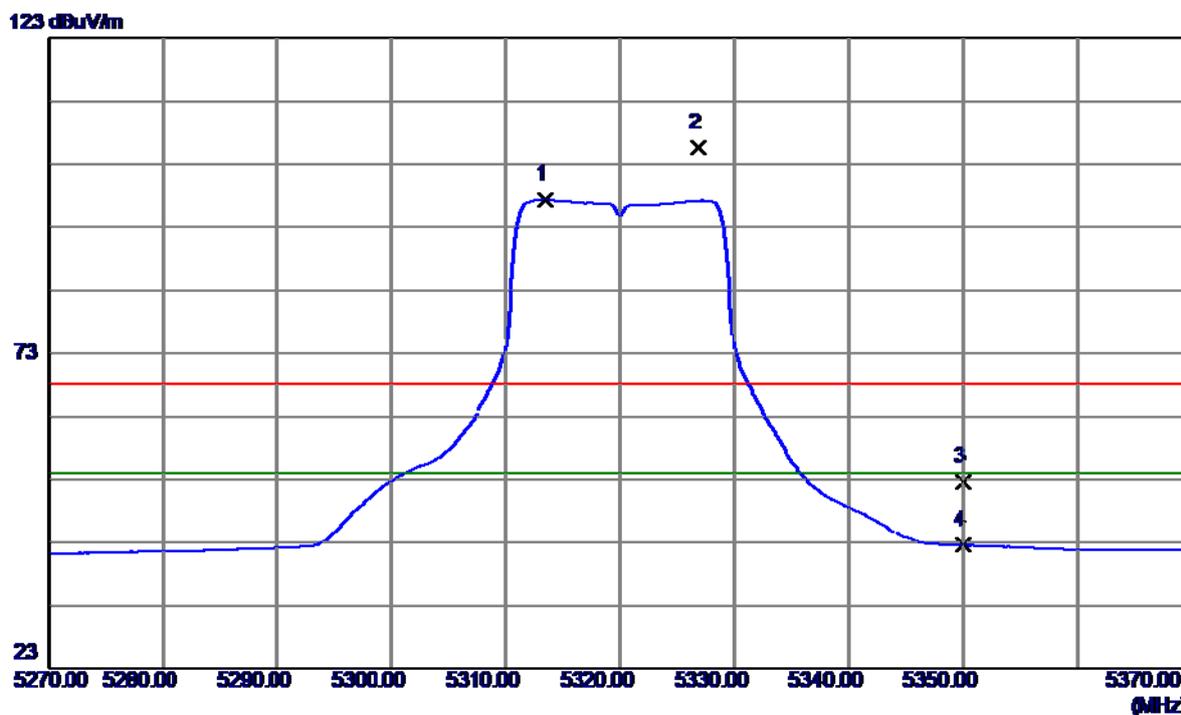

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5313.4000	56.82	40.56	97.38	54.00	43.38	AVG	no limit
2	5326.9000	64.97	40.59	105.56	68.30	37.26	Peak	no limit
3	5350.0000	12.00	40.64	52.64	68.30	-15.66	Peak	
4	5350.0000	1.92	40.64	42.56	54.00	-11.44	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

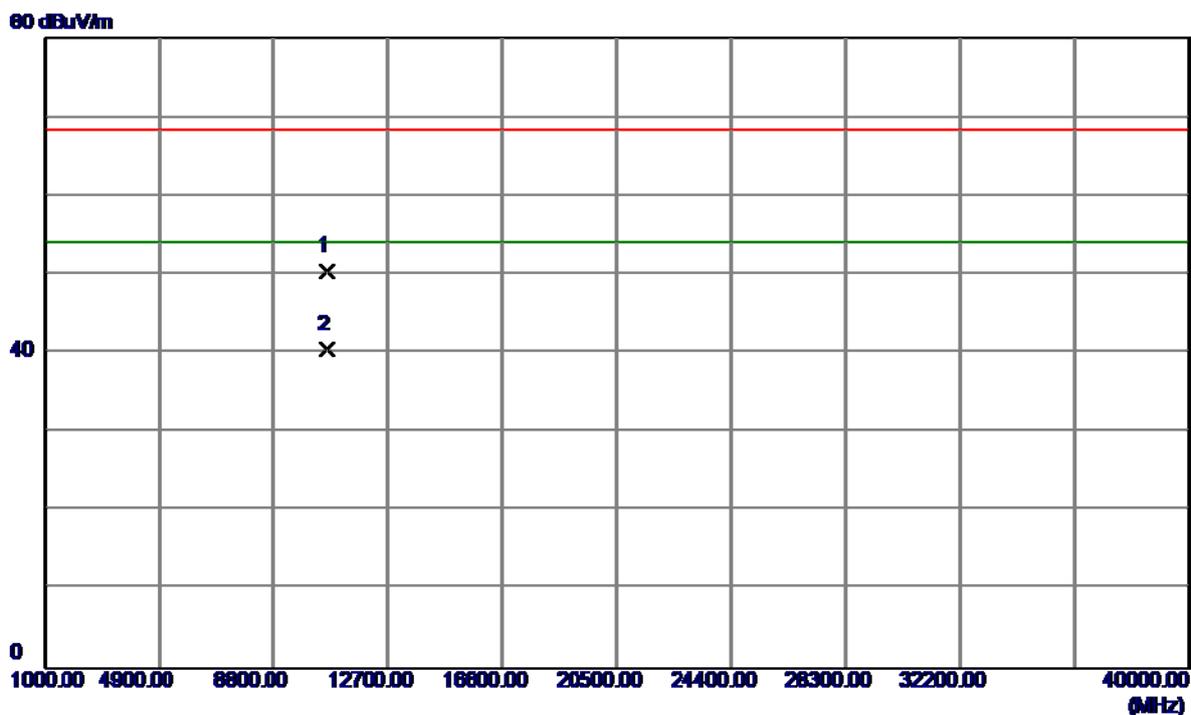

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10640.2200	36.14	14.25	50.39	68.30	-17.91	Peak	
2	10640.2200	26.26	14.25	40.51	54.00	-13.49	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

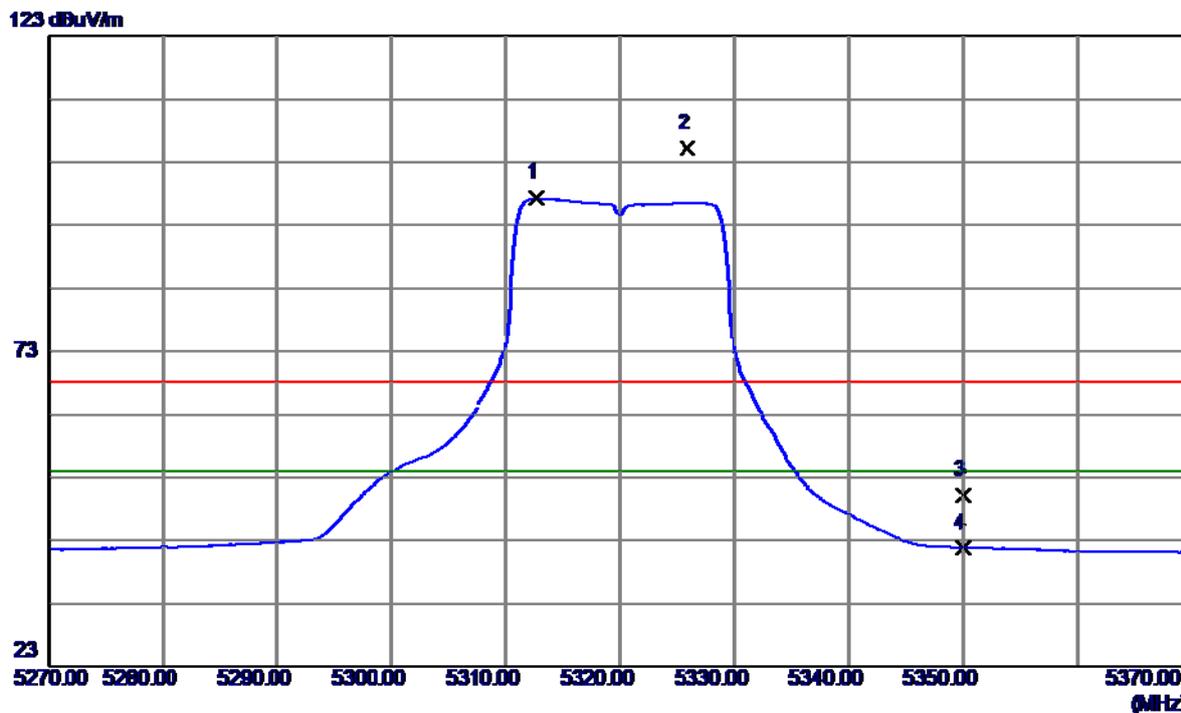

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5312.7000	56.75	40.56	97.31	54.00	43.31	AVG	no limit
2	5325.9000	64.65	40.59	105.24	68.30	36.94	Peak	no limit
3	5350.0000	9.50	40.64	50.14	68.30	-18.16	Peak	
4	5350.0000	1.20	40.64	41.84	54.00	-12.16	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

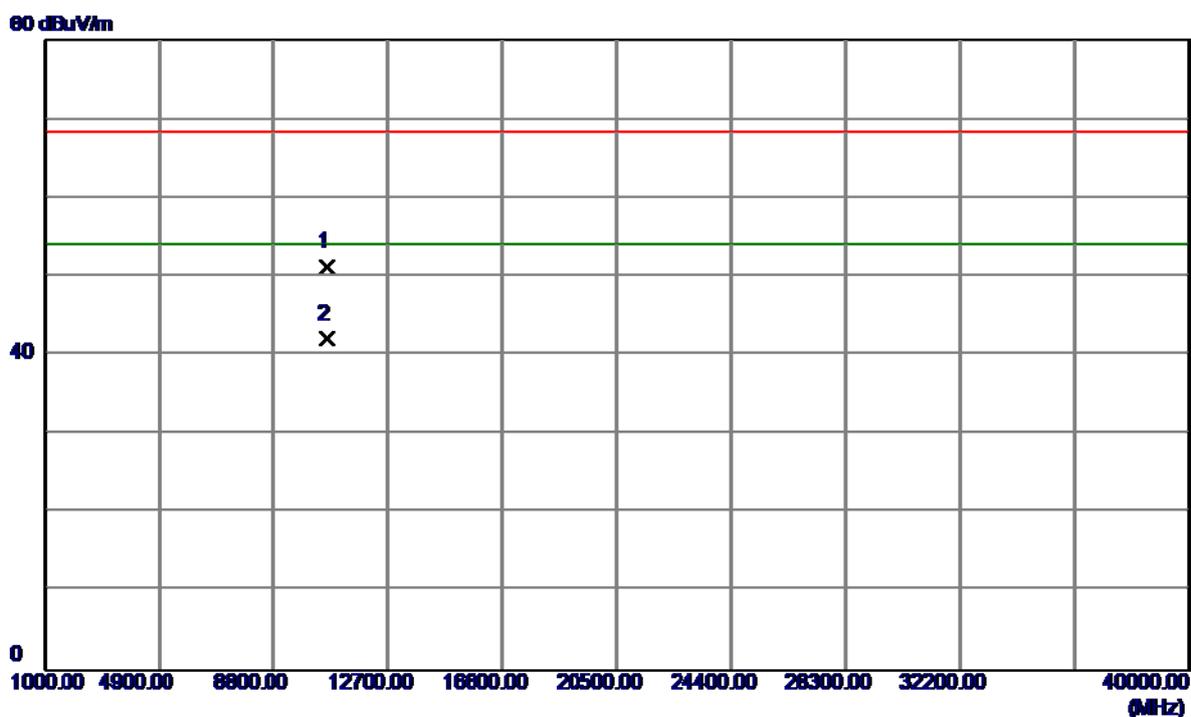

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10640.8200	37.02	14.25	51.27	68.30	-17.03	Peak	
2	10640.8200	27.79	14.25	42.04	54.00	-11.96	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

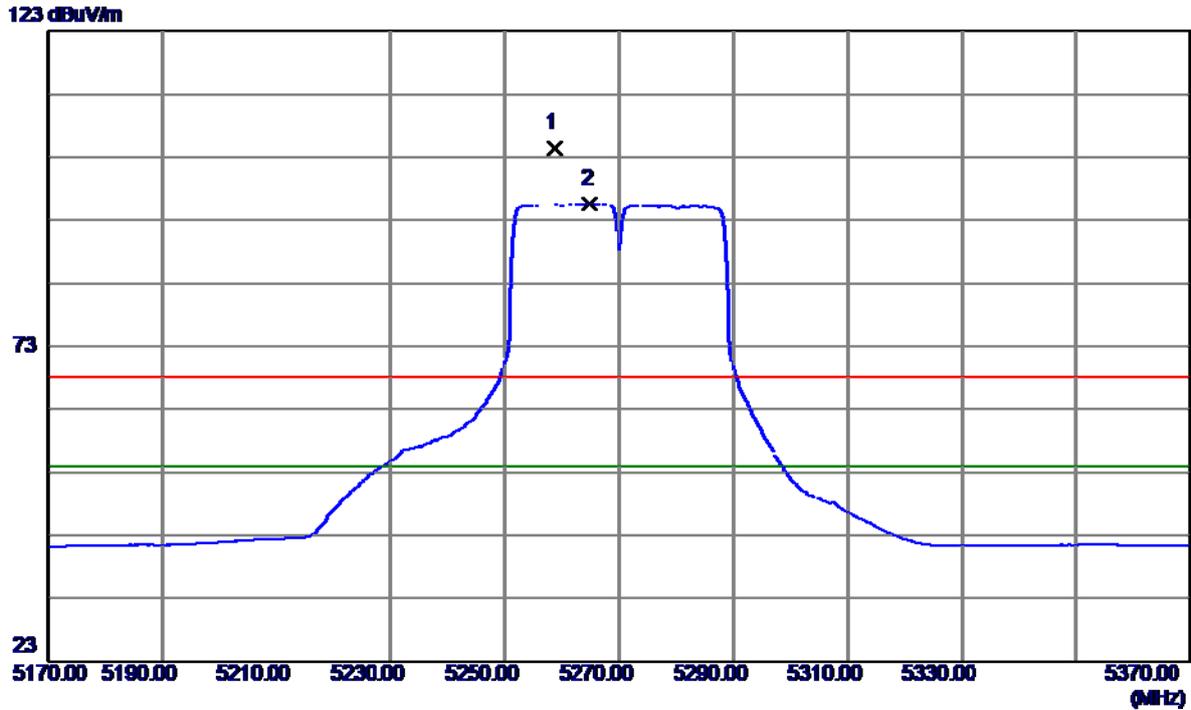

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5258.6000	63.88	40.45	104.33	68.30	36.03	Peak	no limit
2	5265.0000	55.20	40.46	95.66	54.00	41.66	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Vertical

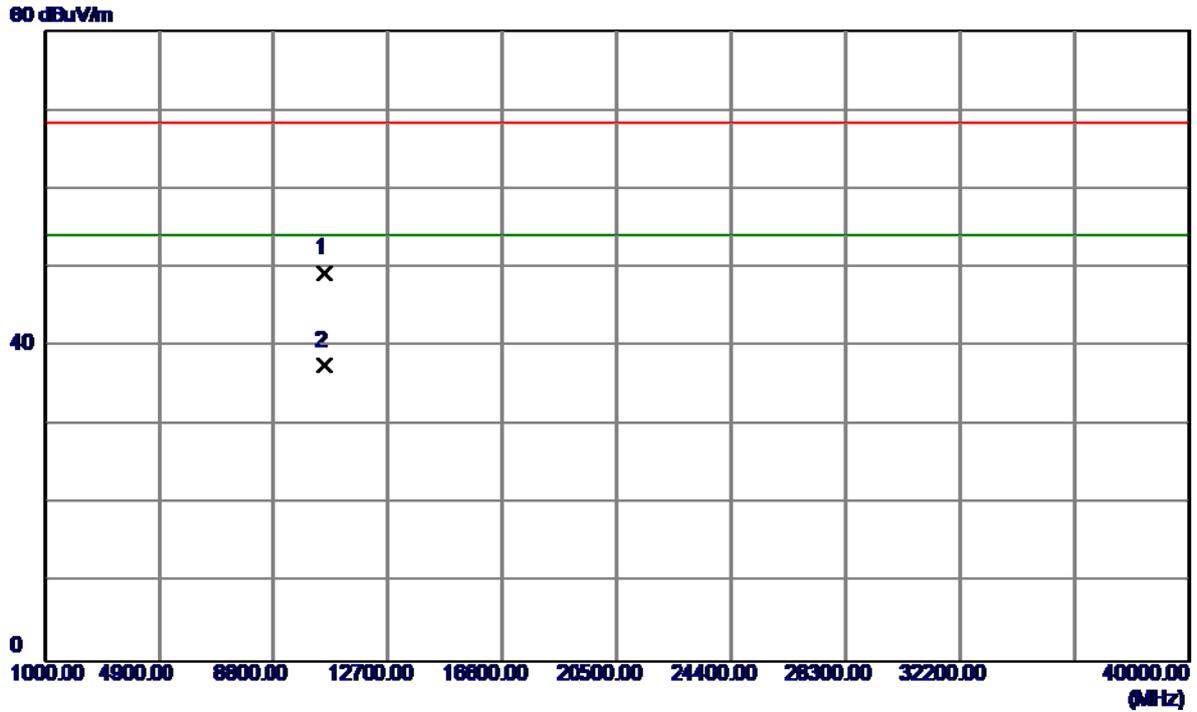

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10541.8099	35.39	13.84	49.23	68.30	-19.07	Peak	
2	10541.8099	23.68	13.84	37.52	54.00	-16.48	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Horizontal

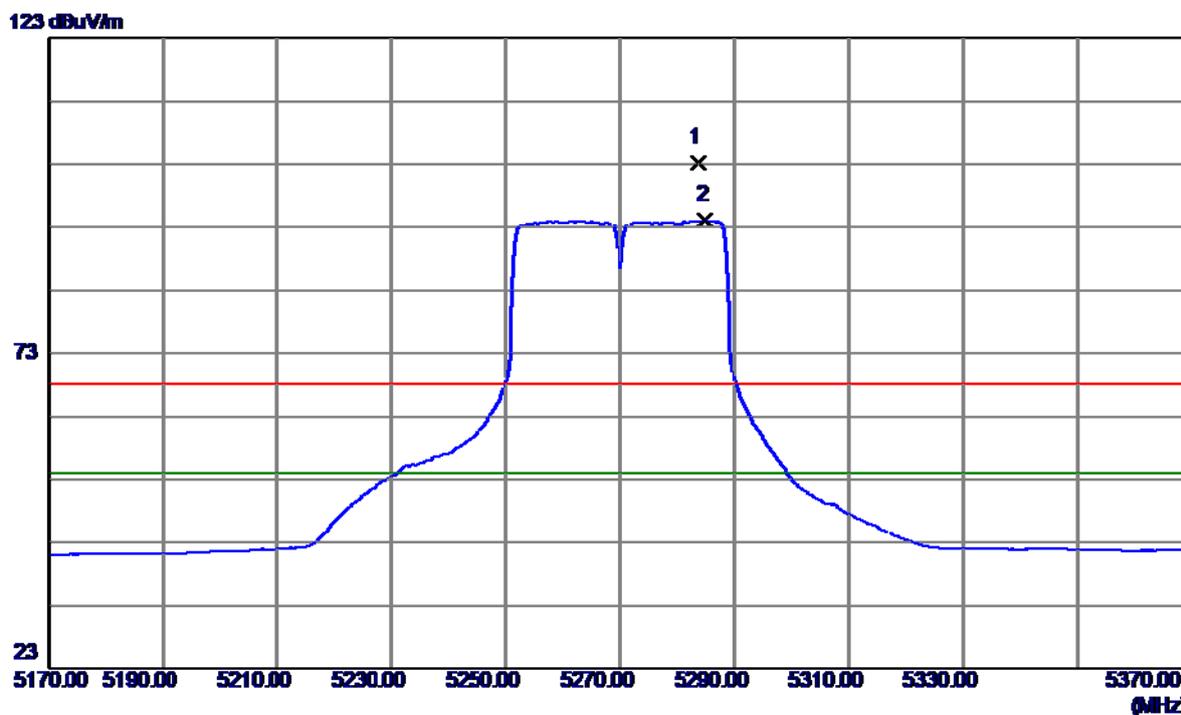

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5283.8000	62.65	40.50	103.15	68.30	34.85	Peak	no limit
2	5285.0000	53.67	40.50	94.17	54.00	40.17	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz


Horizontal

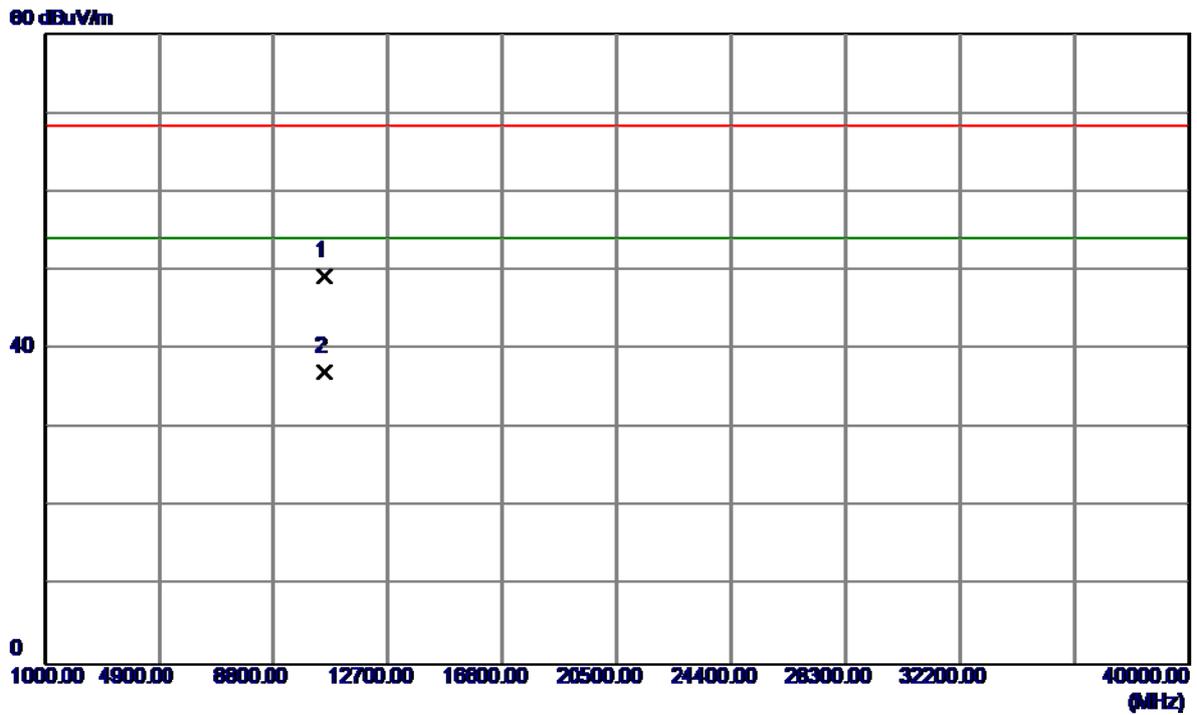

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10540.3700	35.45	13.83	49.28	68.30	-19.02	Peak	
2	10540.3700	23.31	13.83	37.14	54.00	-16.86	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Vertical

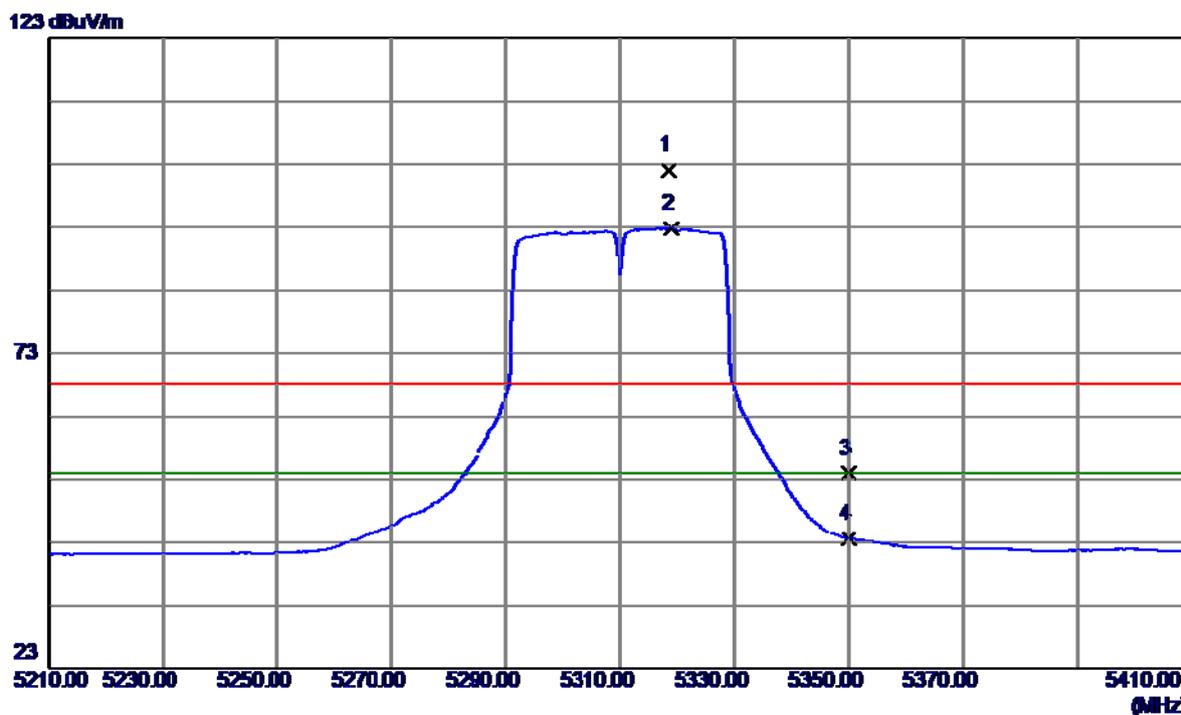

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5318.4000	61.41	40.57	101.98	68.30	33.68	Peak	no limit
2	5318.8000	52.25	40.58	92.83	54.00	38.83	AVG	no limit
3	5350.0000	13.26	40.64	53.90	68.30	-14.40	Peak	
4	5350.0000	2.96	40.64	43.60	54.00	-10.40	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

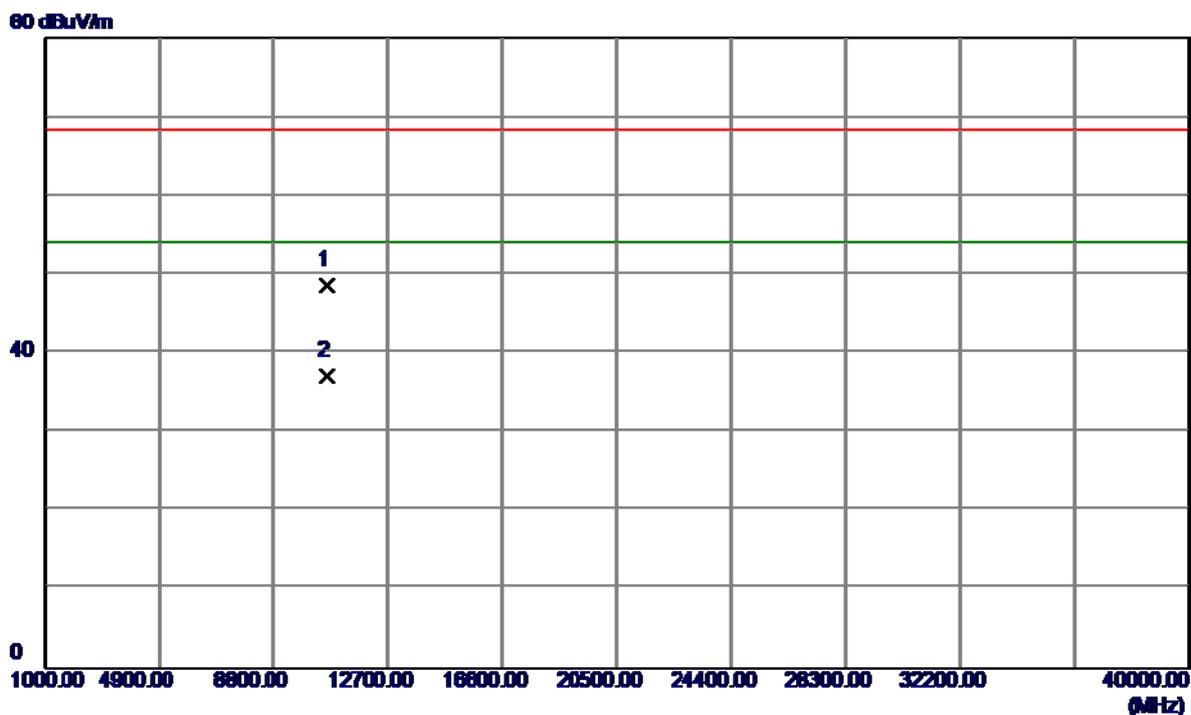


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10620.6500	34.52	14.17	48.69	68.30	-19.61	Peak	
2	10620.6500	22.94	14.17	37.11	54.00	-16.89	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal


123 dBuV/m

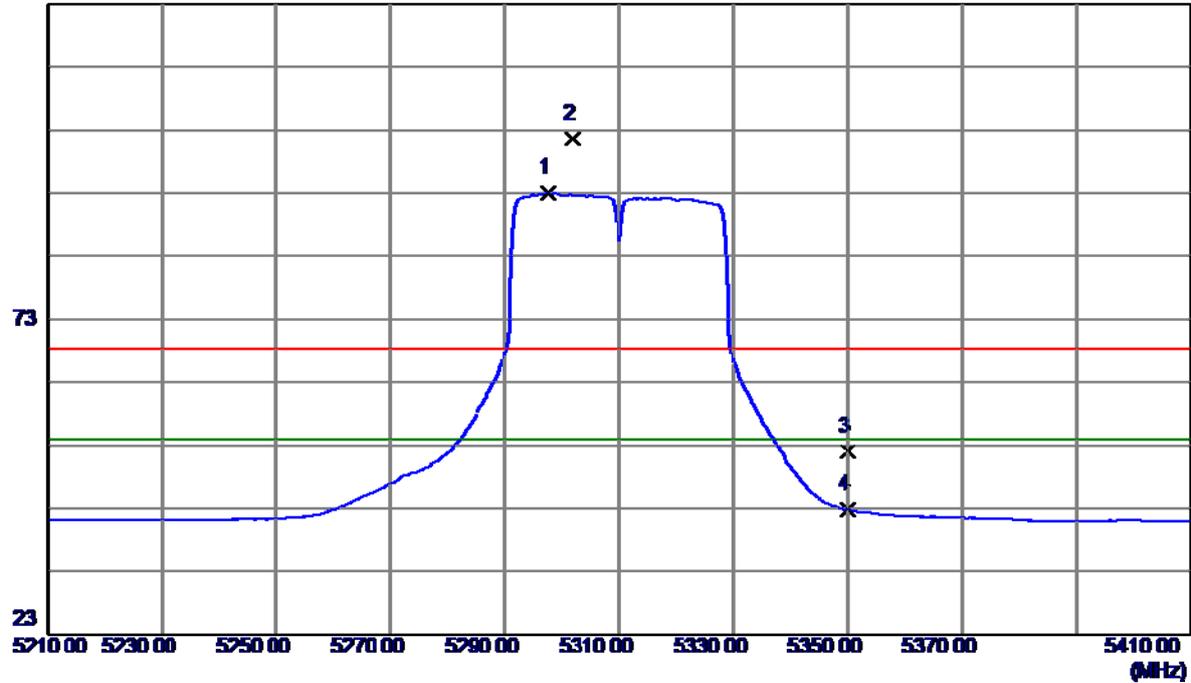

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5297.6000	52.48	40.53	93.01	54.00	39.01	AVG	no limit
2	5301.8000	61.13	40.54	101.67	68.30	33.37	Peak	no limit
3	5350.0000	11.34	40.64	51.98	68.30	-16.32	Peak	
4	5350.0000	2.07	40.64	42.71	54.00	-11.29	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

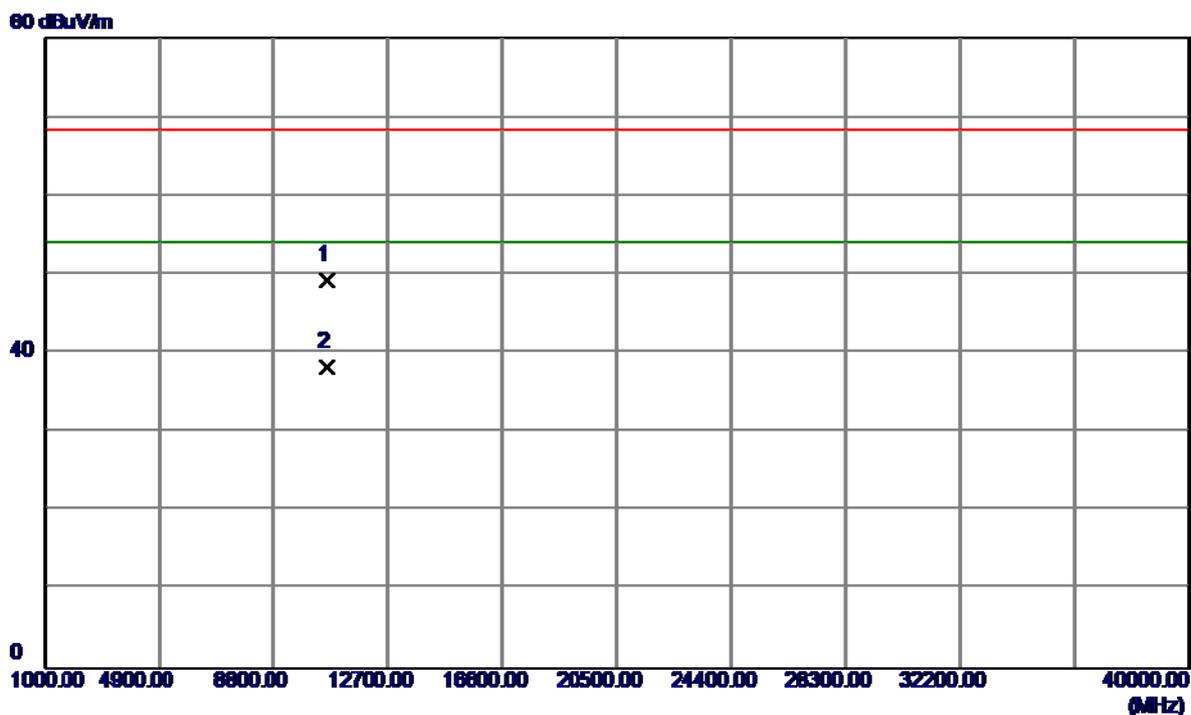


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10620.7500	35.16	14.17	49.33	68.30	-18.97	Peak	
2	10620.7500	24.14	14.17	38.31	54.00	-15.69	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical


123 dBuV/m

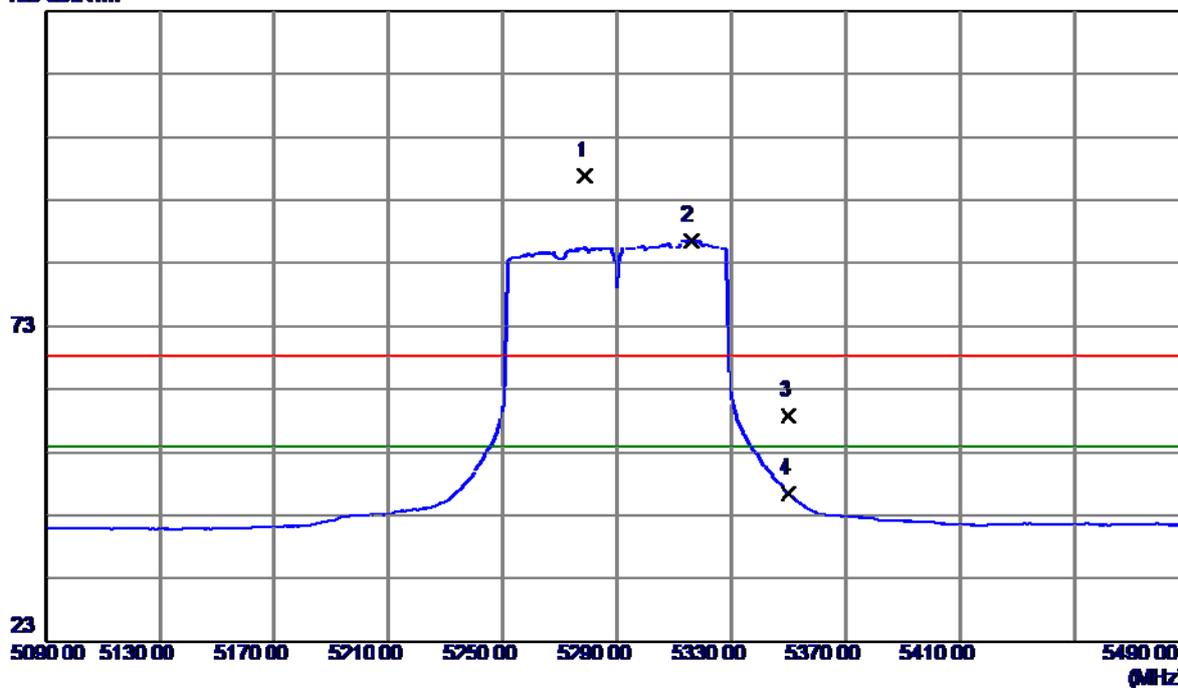

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5278.8000	56.32	40.49	96.81	68.30	28.51	Peak	no limit
2	5316.0000	46.10	40.57	86.67	54.00	32.67	AVG	no limit
3	5350.0000	18.20	40.64	58.84	68.30	-9.46	Peak	
4	5350.0000	5.70	40.64	46.34	54.00	-7.66	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

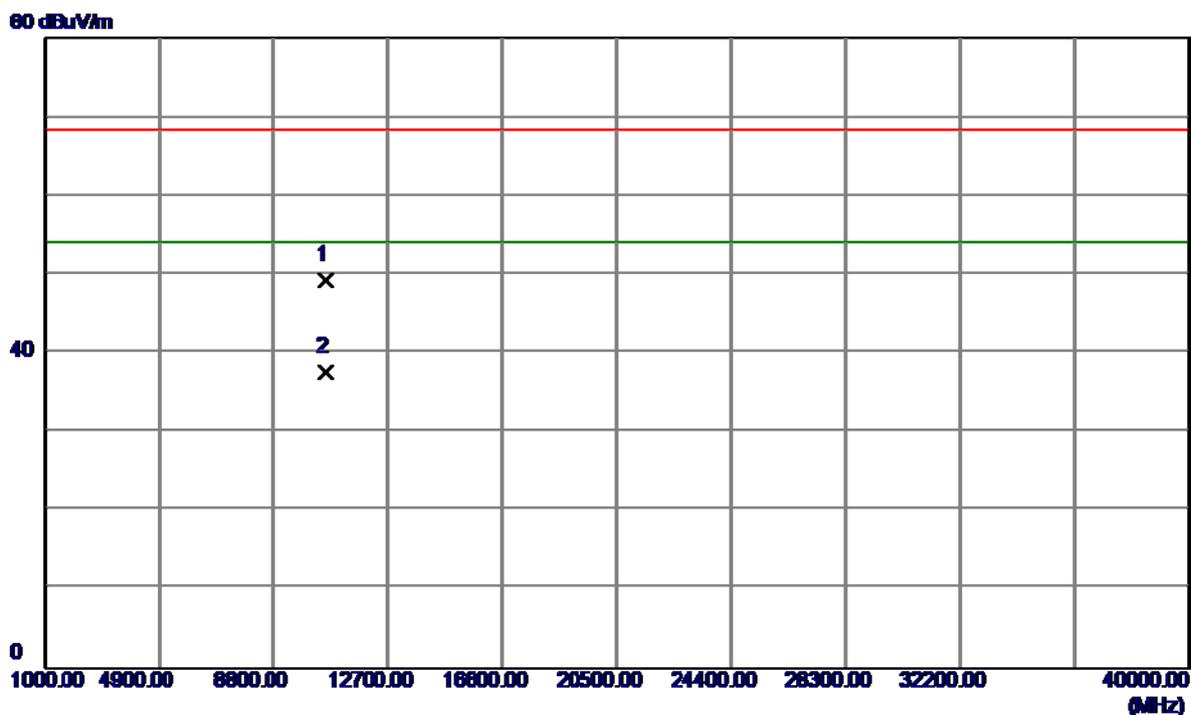


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10581.7400	35.30	14.01	49.31	68.30	-18.99	Peak	
2	10581.7400	23.61	14.01	37.62	54.00	-16.38	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal


123 dBuV/m

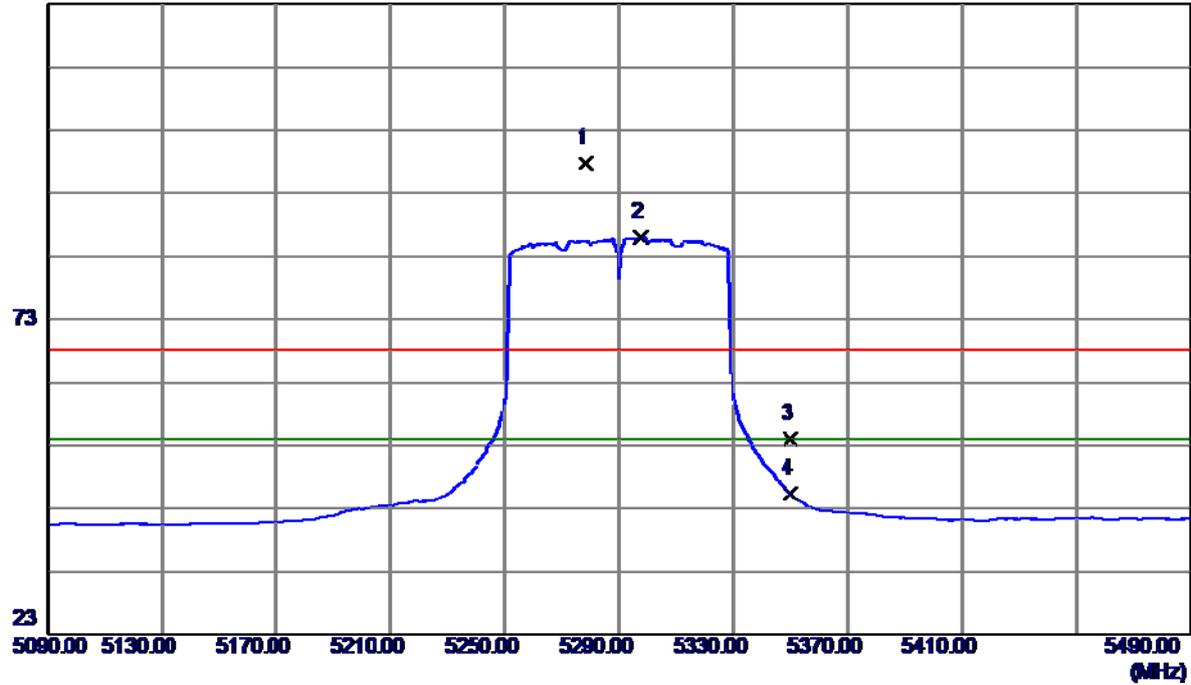

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5278.4000	57.25	40.49	97.74	68.30	29.44	Peak	no limit
2	5297.6000	45.44	40.53	85.97	54.00	31.97	AVG	no limit
3	5350.0000	13.33	40.64	53.97	68.30	-14.33	Peak	
4	5350.0000	4.68	40.64	45.32	54.00	-8.68	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

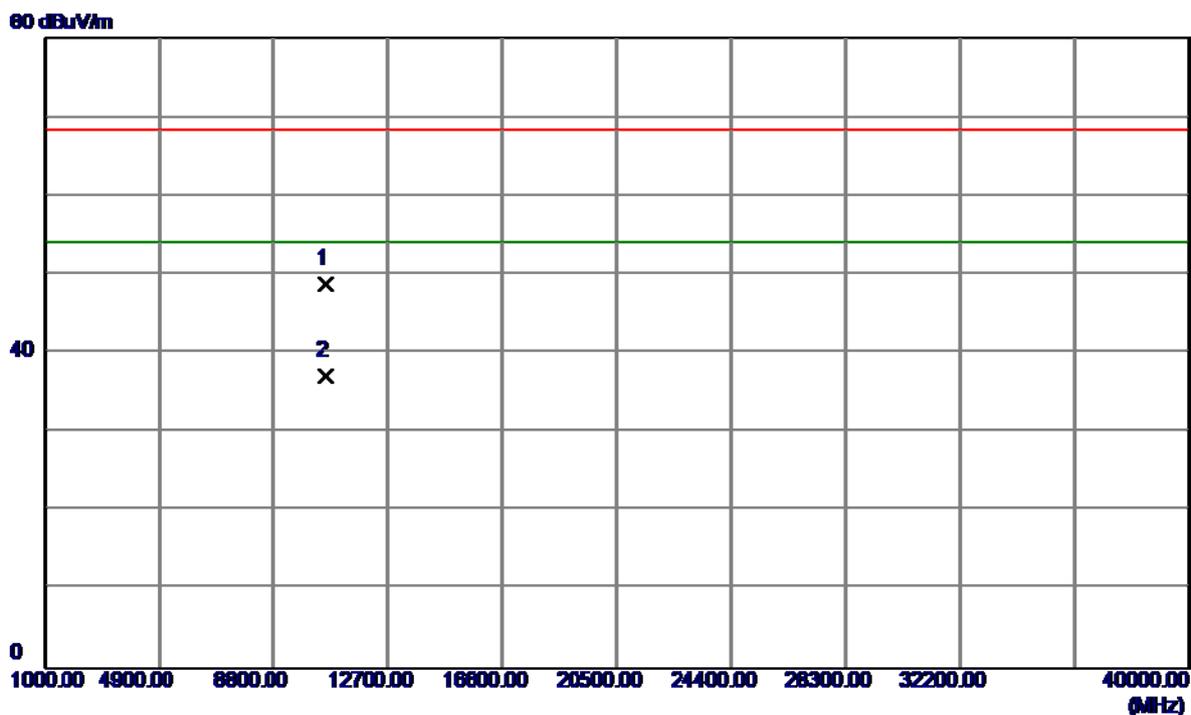


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	10581.6600	34.72	14.01	48.73	68.30	-19.57	Peak	
2	10581.6600	23.14	14.01	37.15	54.00	-16.85	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical


123 dBuV/m

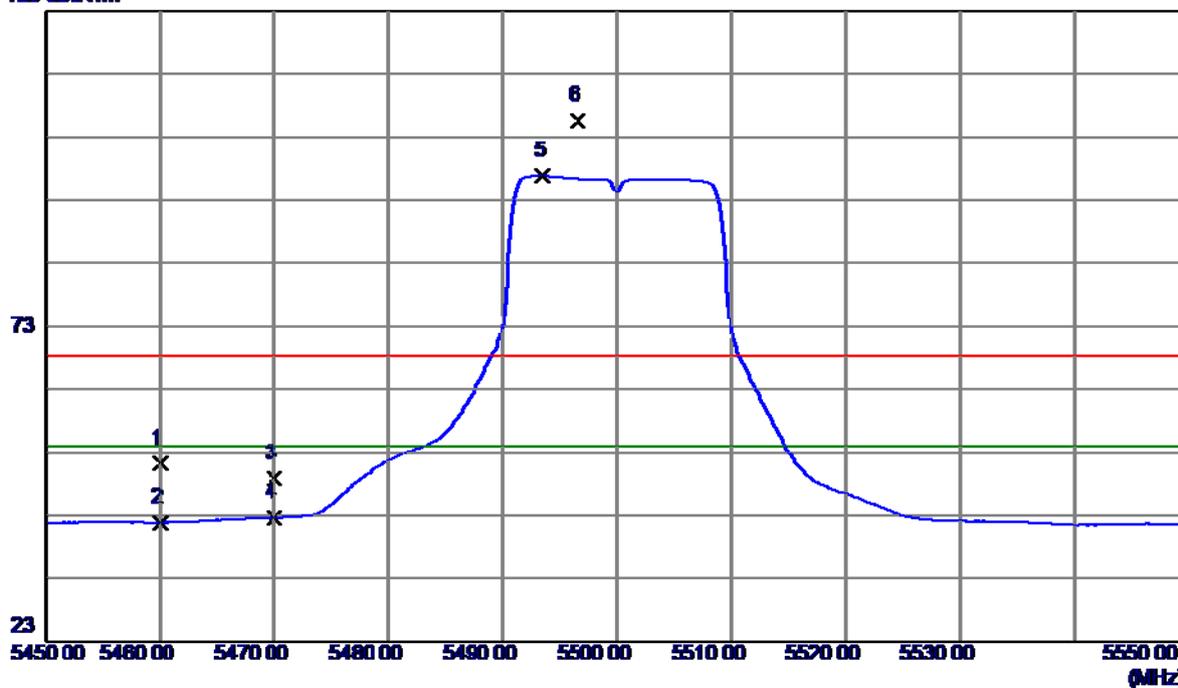

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	10.31	40.88	51.19	68.30	-17.11	Peak	
2	5460.0000	0.99	40.88	41.87	54.00	-12.13	AVG	
3	5470.0000	7.83	40.90	48.73	68.30	-19.57	Peak	
4	5470.0000	1.75	40.90	42.65	54.00	-11.35	AVG	
5	5493.5000	55.82	40.95	96.77	54.00	42.77	AVG	no limit
6	5496.6000	64.69	40.95	105.64	68.30	37.34	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Vertical

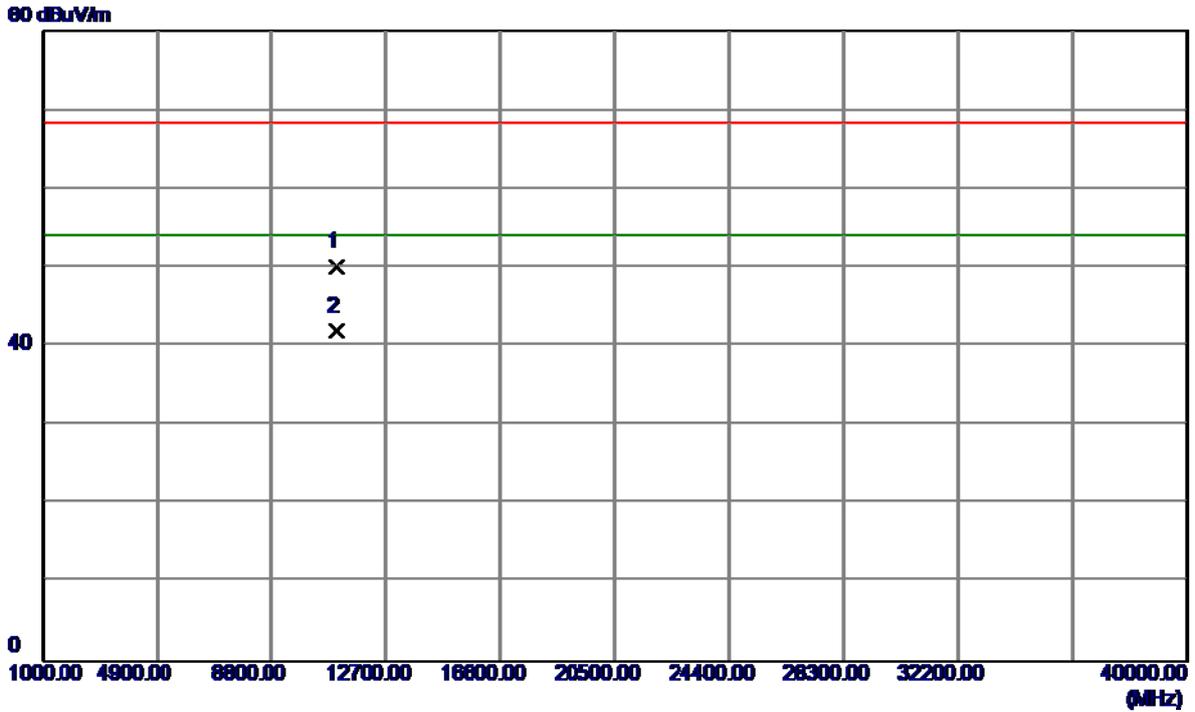

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11000.1200	34.26	15.75	50.01	68.30	-18.29	Peak	
2	11000.1200	26.22	15.75	41.97	54.00	-12.03	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Horizontal

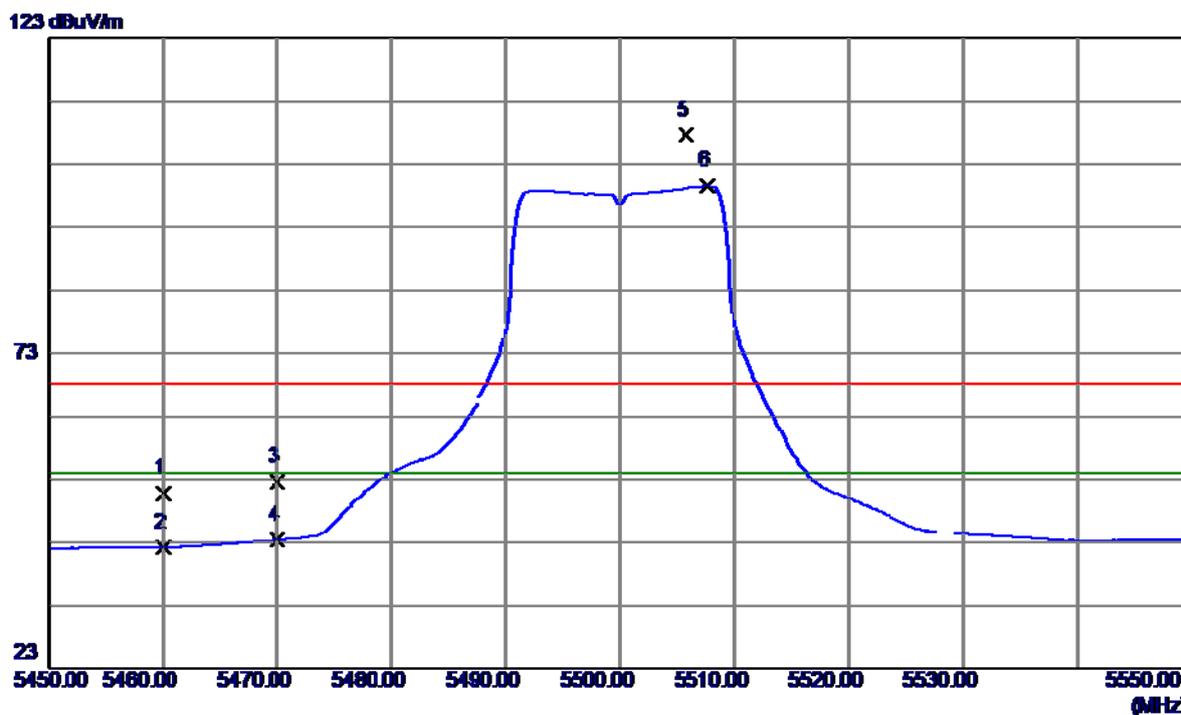

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	9.92	40.88	50.80	68.30	-17.50	Peak	
2	5460.0000	1.31	40.88	42.19	54.00	-11.81	AVG	
3	5470.0000	11.74	40.90	52.64	68.30	-15.66	Peak	
4	5470.0000	2.49	40.90	43.39	54.00	-10.61	AVG	
5	5505.8000	66.69	40.97	107.66	68.30	39.36	Peak	no limit
6	5507.7000	58.57	40.97	99.54	54.00	45.54	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz


Horizontal

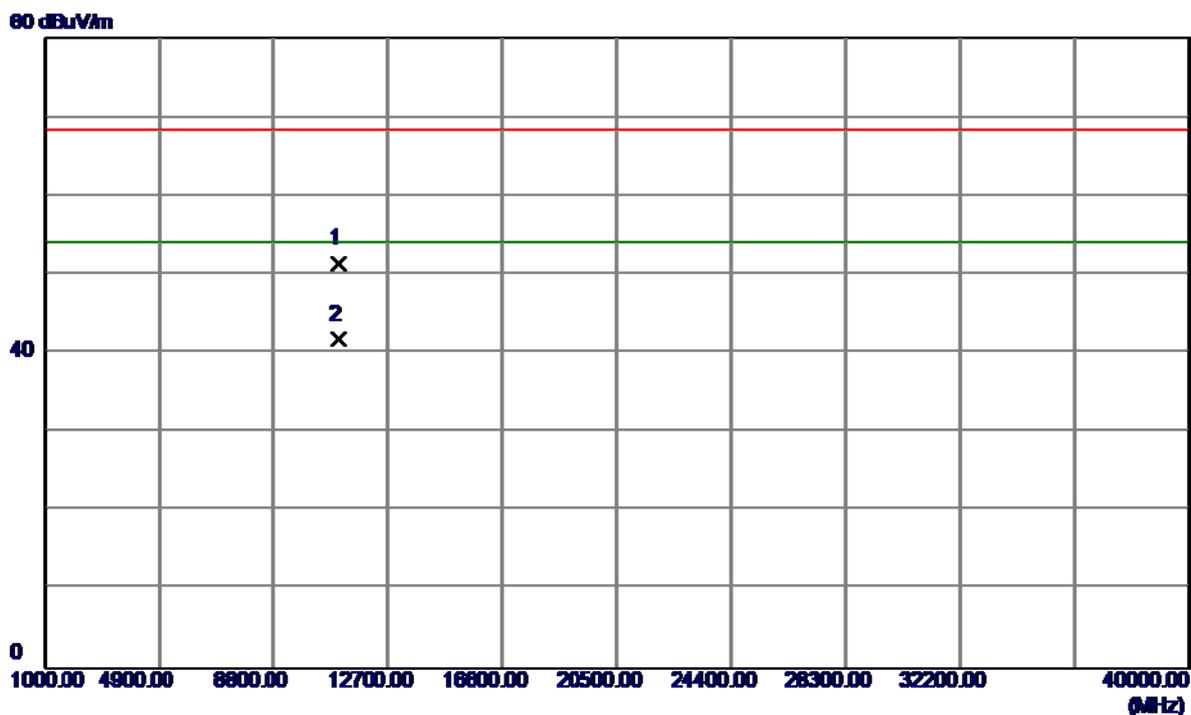

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11000.5800	35.59	15.75	51.34	68.30	-16.96	Peak	
2	11000.5800	25.96	15.75	41.71	54.00	-12.29	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Vertical

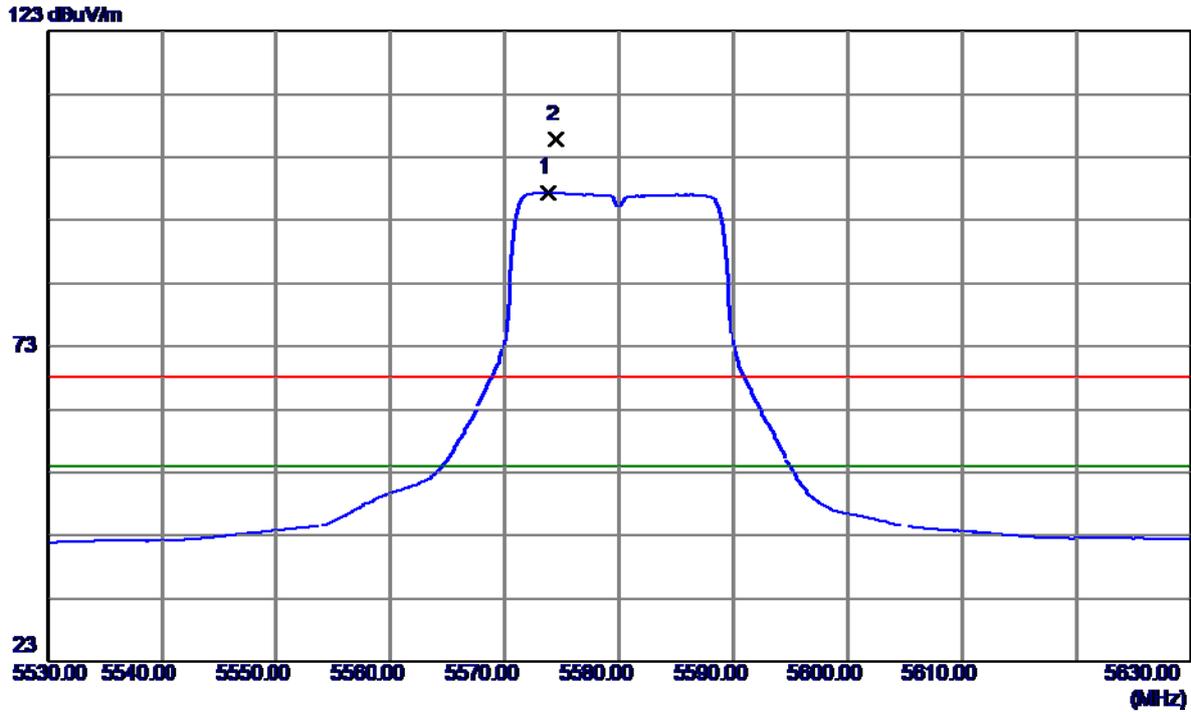

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5573.8000	56.37	41.06	97.43	54.00	43.43	AVG	no limit
2	5574.4000	64.69	41.06	105.75	68.30	37.45	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Vertical

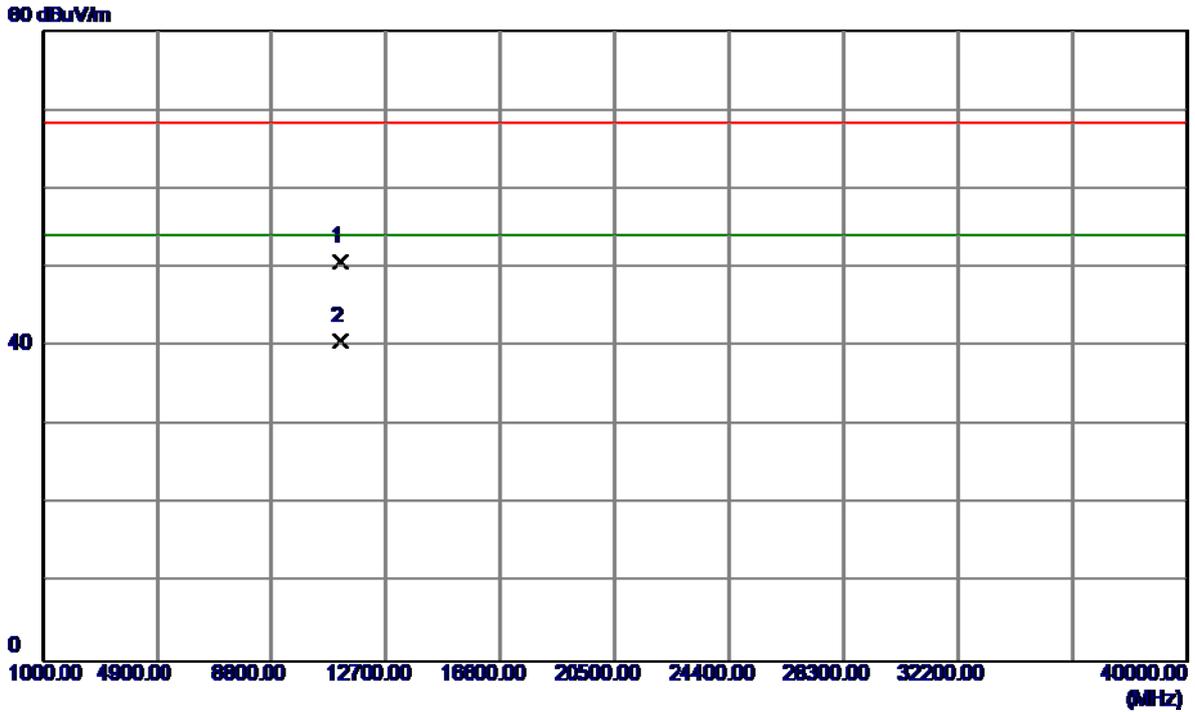

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11160.9800	34.54	16.13	50.67	68.30	-17.63	Peak	
2	11160.9800	24.53	16.13	40.66	54.00	-13.34	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz


Horizontal

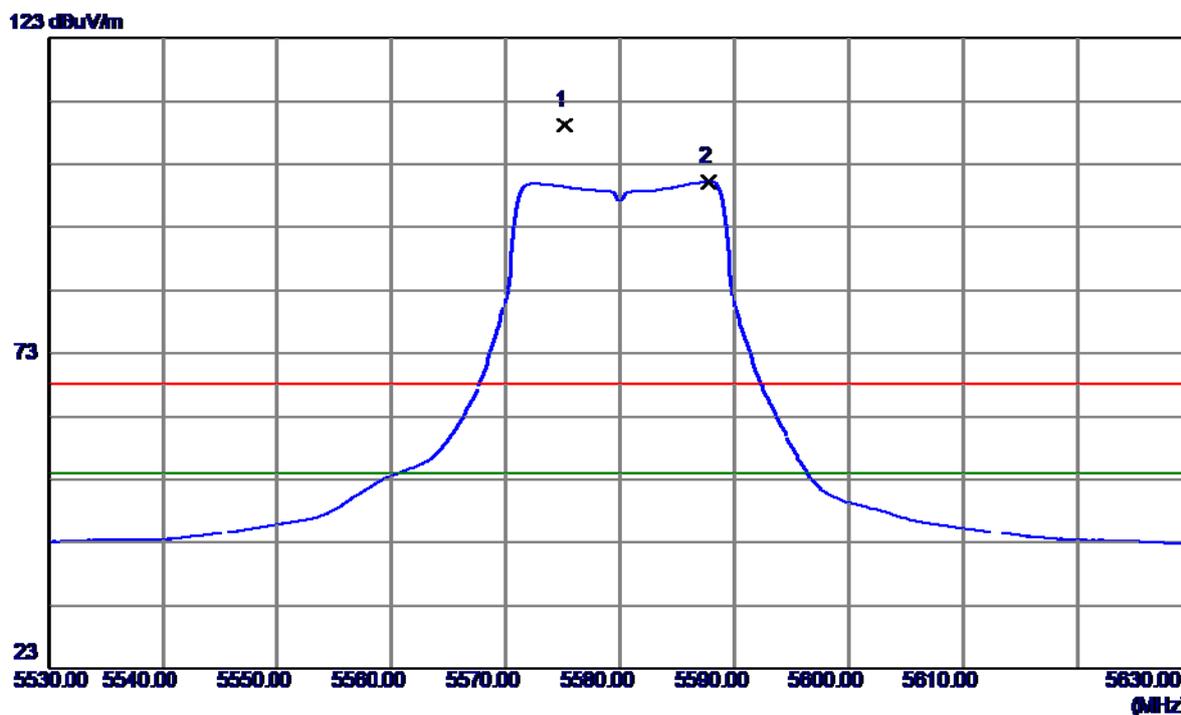

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5575.1000	68.11	41.06	109.17	68.30	40.87	Peak	no limit
2	5587.8000	59.19	41.08	100.27	54.00	46.27	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5580MHz

Horizontal

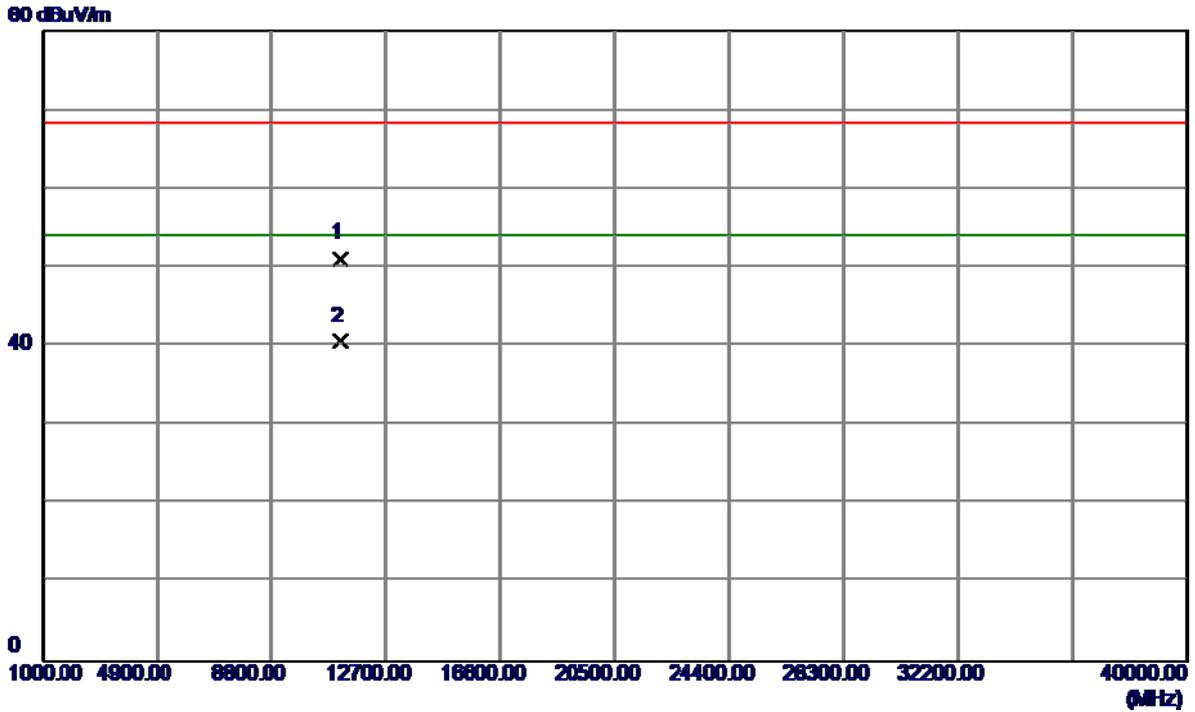


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11160.0800	34.99	16.13	51.12	68.30	-17.18	Peak	
2	11160.0800	24.53	16.13	40.66	54.00	-13.34	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical


123 dBuV/m

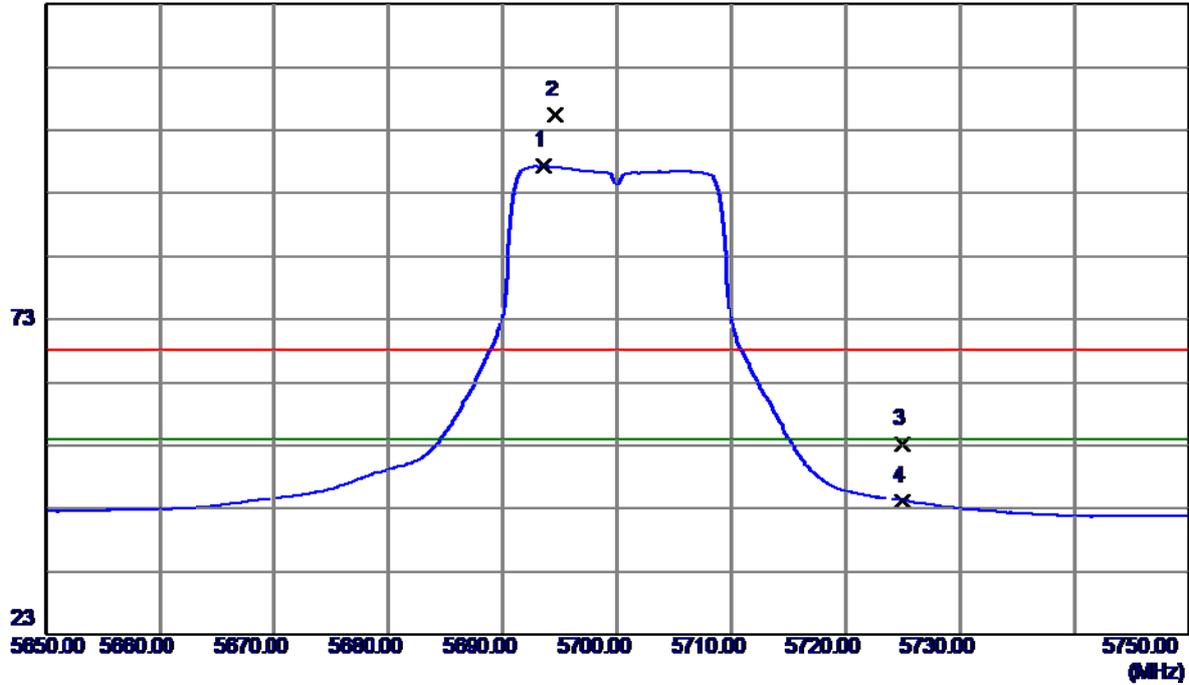

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5693.6000	56.16	41.22	97.38	54.00	43.38	AVG	no limit
2	5694.6000	64.25	41.22	105.47	68.30	37.17	Peak	no limit
3	5725.0000	11.96	41.27	53.23	68.30	-15.07	Peak	
4	5725.0000	2.96	41.27	44.23	54.00	-9.77	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Vertical

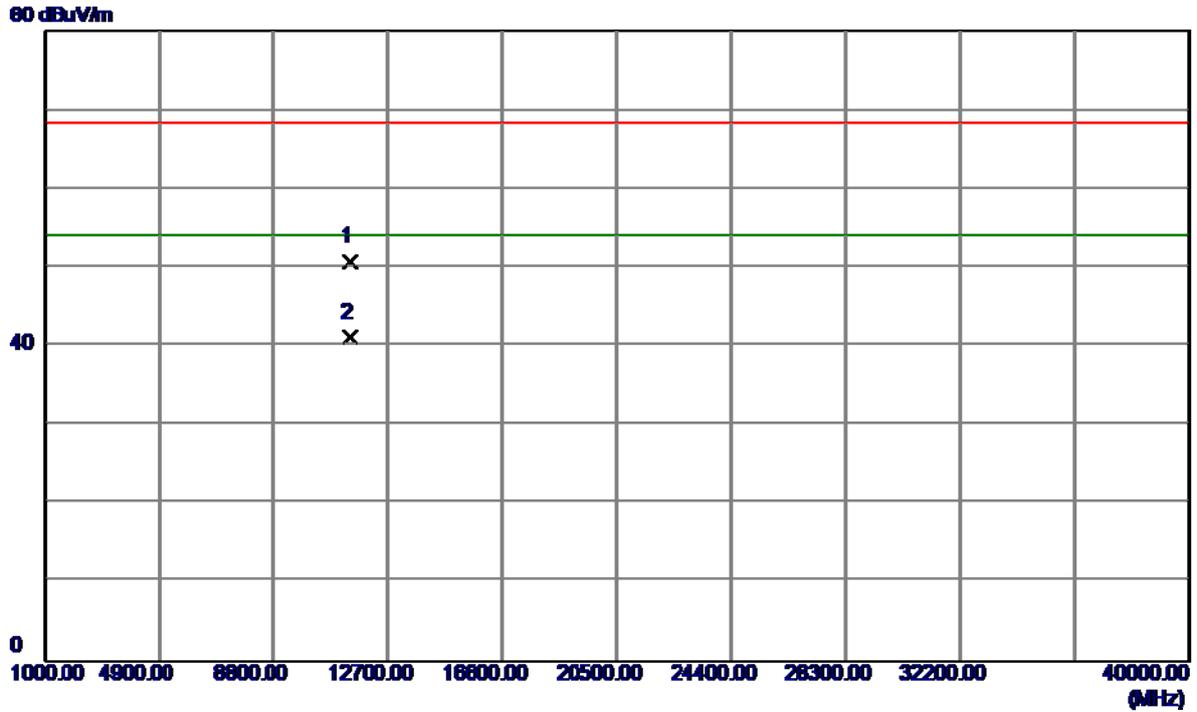

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.2900	34.09	16.70	50.79	68.30	-17.51	Peak	
2	11400.2900	24.36	16.70	41.06	54.00	-12.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Horizontal

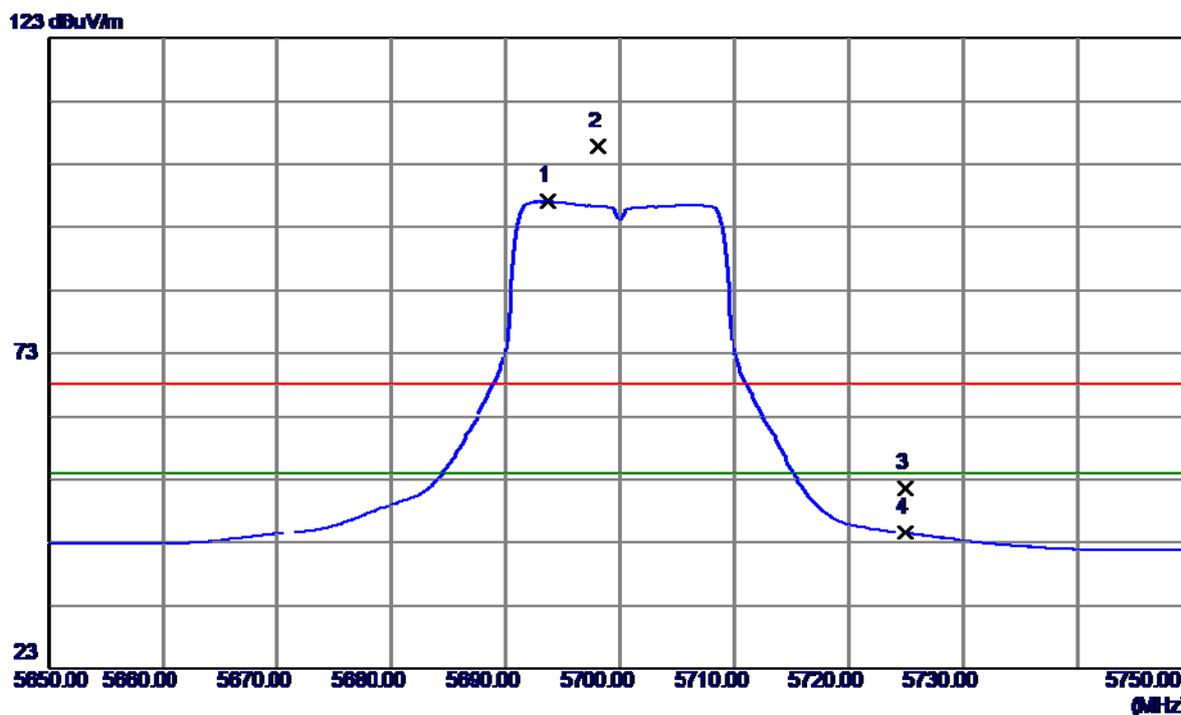

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5693.7000	55.98	41.22	97.20	54.00	43.20	AVG	no limit
2	5698.1000	64.65	41.23	105.88	68.30	37.58	Peak	no limit
3	5725.0000	10.41	41.27	51.68	68.30	-16.62	Peak	
4	5725.0000	3.29	41.27	44.56	54.00	-9.44	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Horizontal

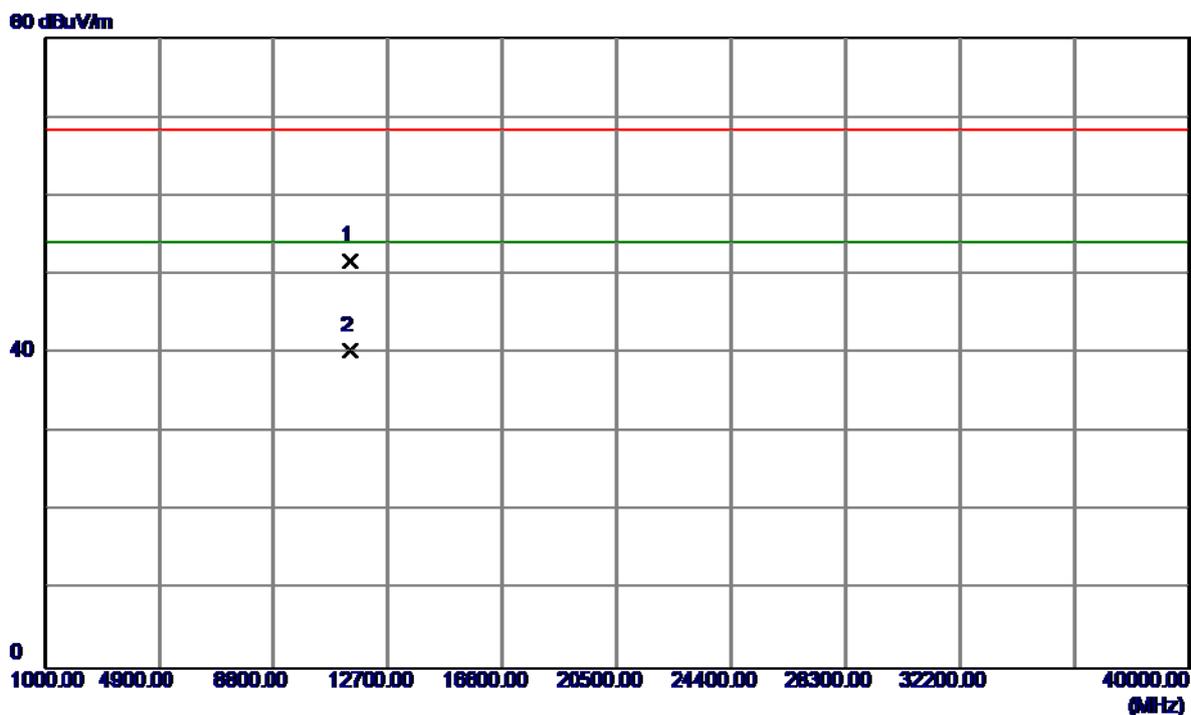

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11400.4800	34.99	16.70	51.69	68.30	-16.61	Peak	
2	11400.4800	23.67	16.70	40.37	54.00	-13.63	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Vertical

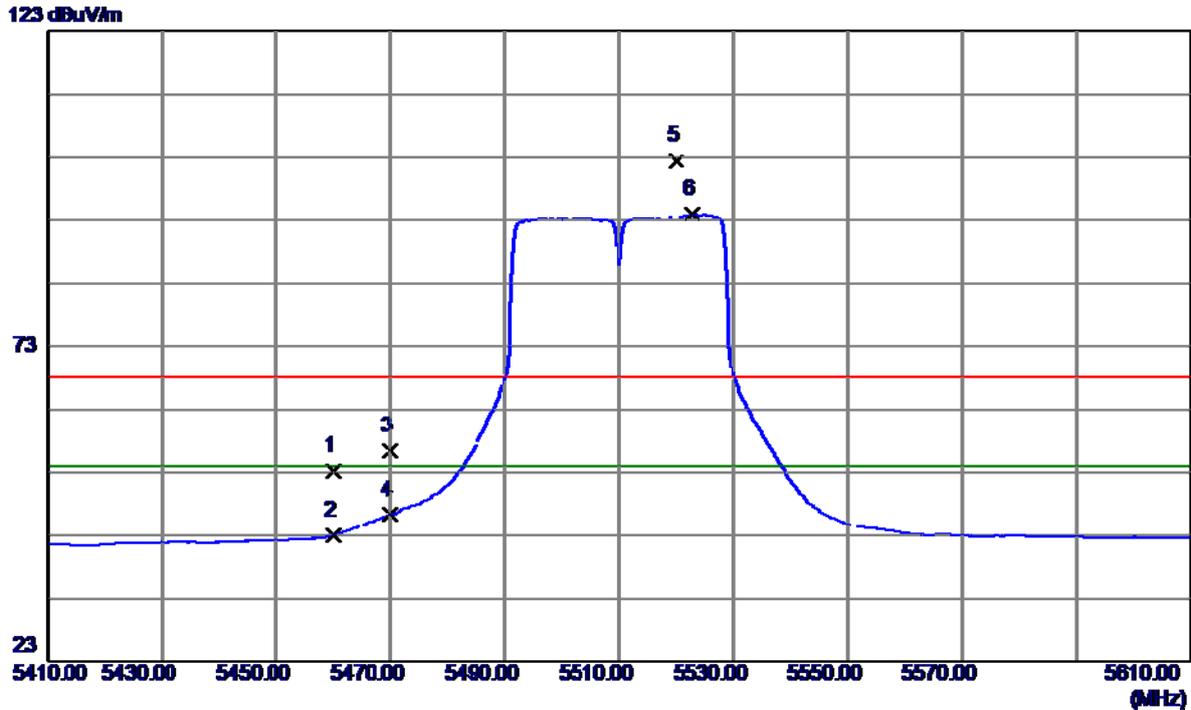

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	12.29	40.88	53.17	68.30	-15.13	Peak	
2	5460.0000	2.12	40.88	43.00	54.00	-11.00	AVG	
3	5470.0000	15.55	40.90	56.45	68.30	-11.85	Peak	
4	5470.0000	5.40	40.90	46.30	54.00	-7.70	AVG	
5	5520.0000	61.40	40.99	102.39	68.30	34.09	Peak	no limit
6	5522.8000	52.94	40.99	93.93	54.00	39.93	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Vertical

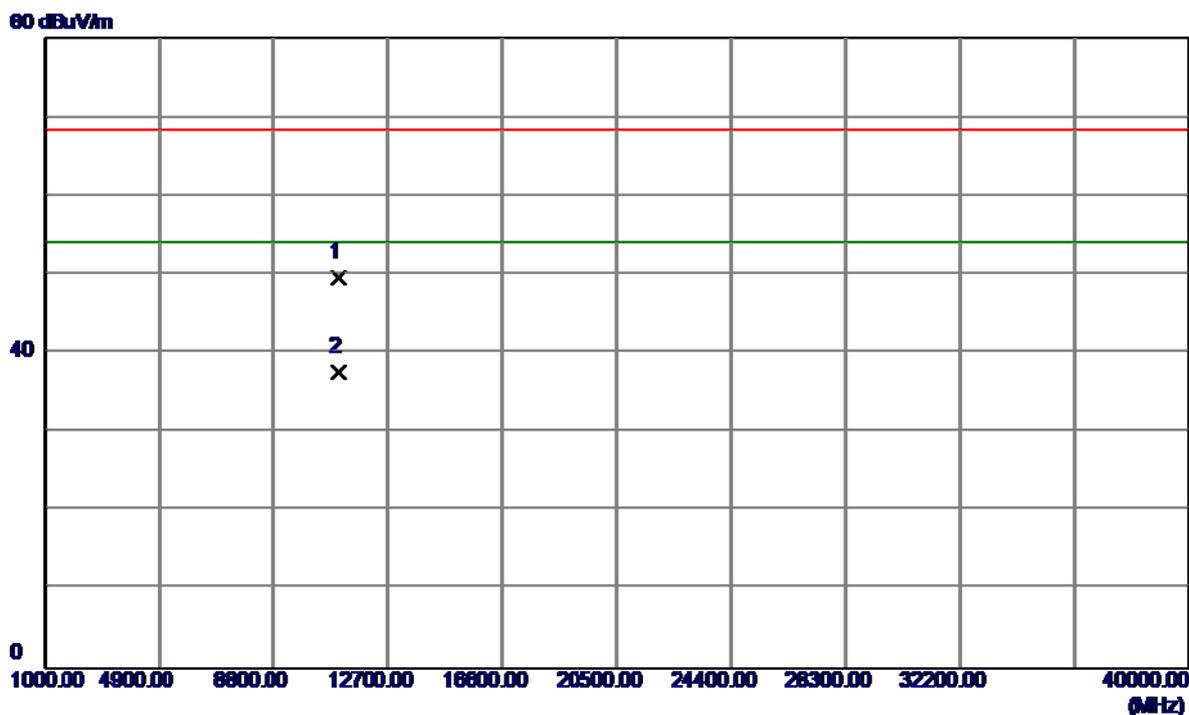

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11020.3700	33.81	15.80	49.61	68.30	-18.69	Peak	
2	11020.3700	21.84	15.80	37.64	54.00	-16.36	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz


Horizontal

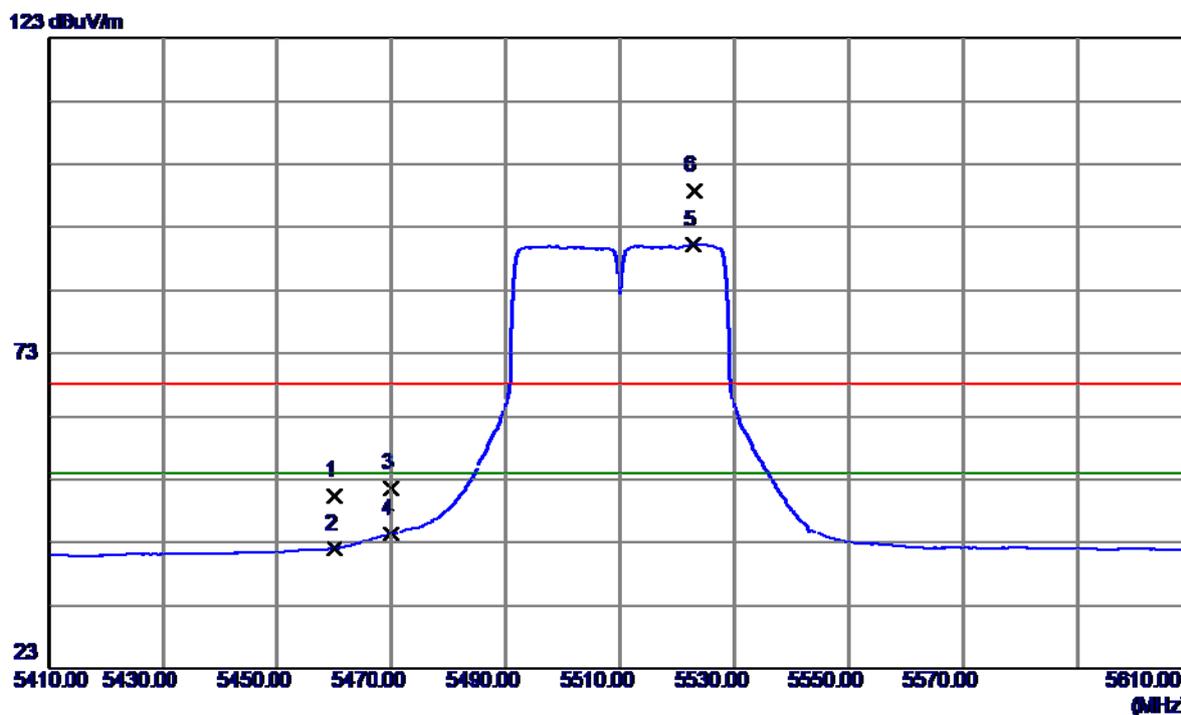

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	9.56	40.88	50.44	68.30	-17.86	Peak	
2	5460.0000	1.13	40.88	42.01	54.00	-11.99	AVG	
3	5470.0000	10.66	40.90	51.56	68.30	-16.74	Peak	
4	5470.0000	3.42	40.90	44.32	54.00	-9.68	AVG	
5	5522.8000	49.23	40.99	90.22	54.00	36.22	AVG	no limit
6	5523.0000	57.86	40.99	98.85	68.30	30.55	Peak	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

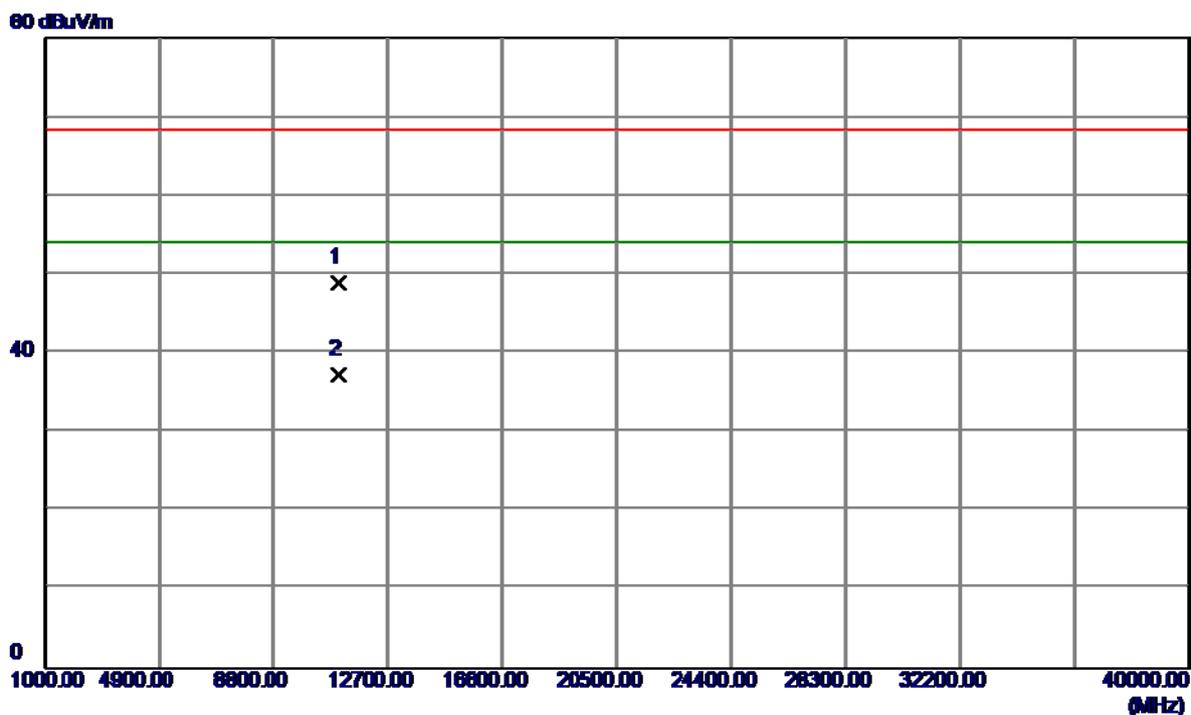


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11021.8700	33.16	15.80	48.96	68.30	-19.34	Peak	
2	11021.8700	21.44	15.80	37.24	54.00	-16.76	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz

Vertical


123 dBuV/m

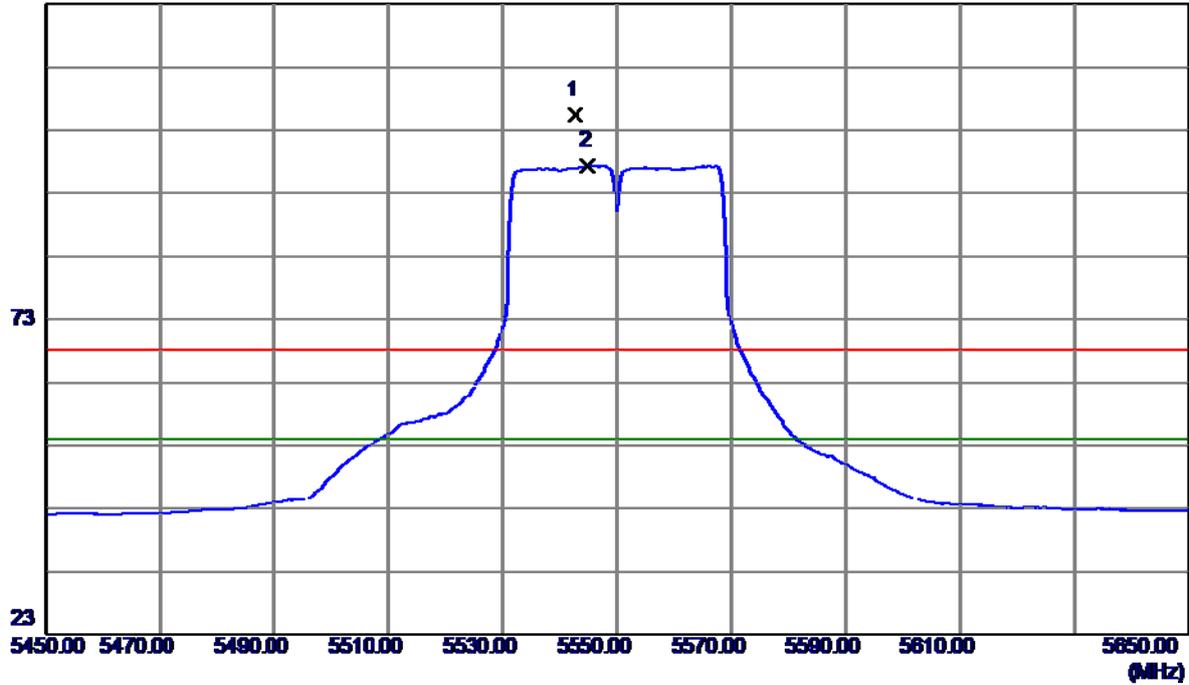

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5542.6000	64.39	41.02	105.41	68.30	37.11	Peak	no limit
2	5545.0000	56.39	41.02	97.41	54.00	43.41	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Vertical

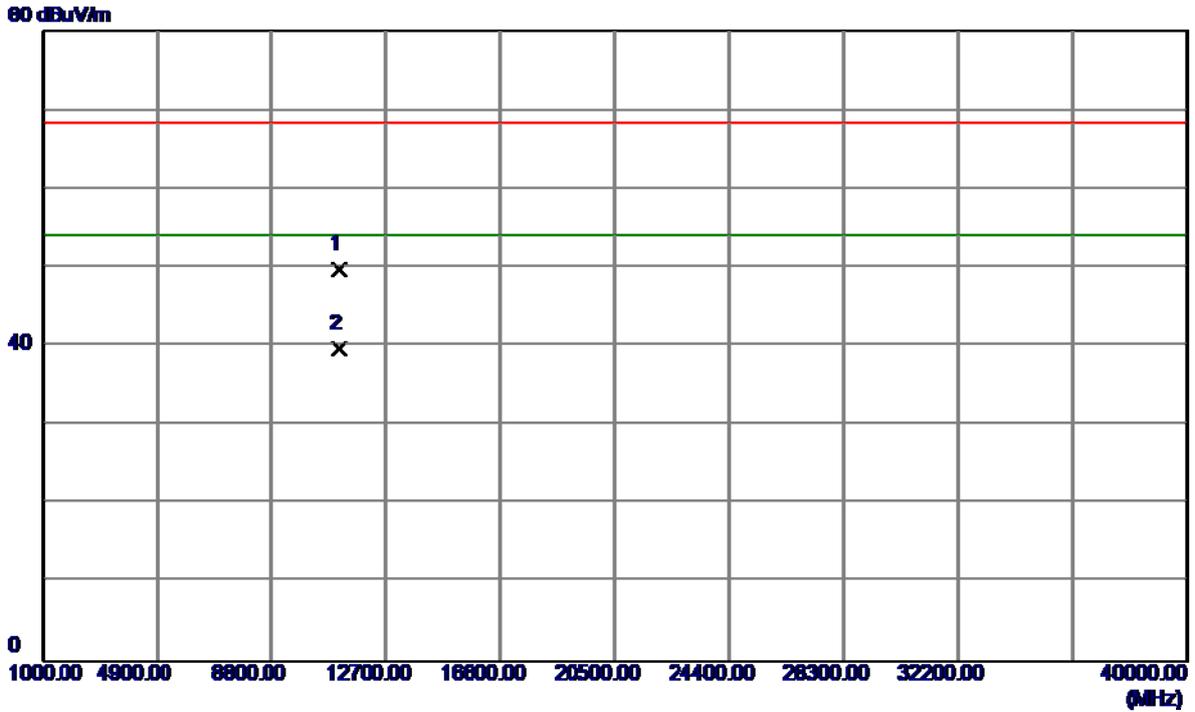

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11103.5800	33.83	16.00	49.83	68.30	-18.47	Peak	
2	11103.5800	23.67	16.00	39.67	54.00	-14.33	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

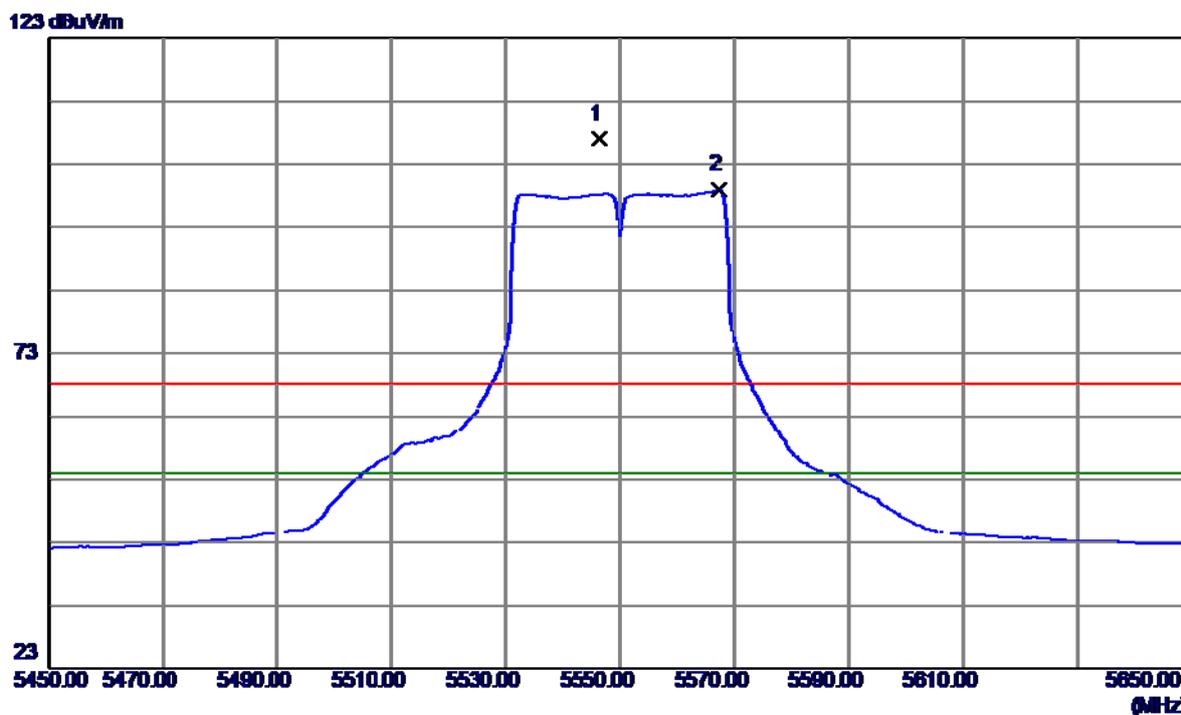

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5546.4000	65.89	41.02	106.91	68.30	38.61	Peak	no limit
2	5567.4000	57.95	41.05	99.00	54.00	45.00	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5550MHz


Horizontal

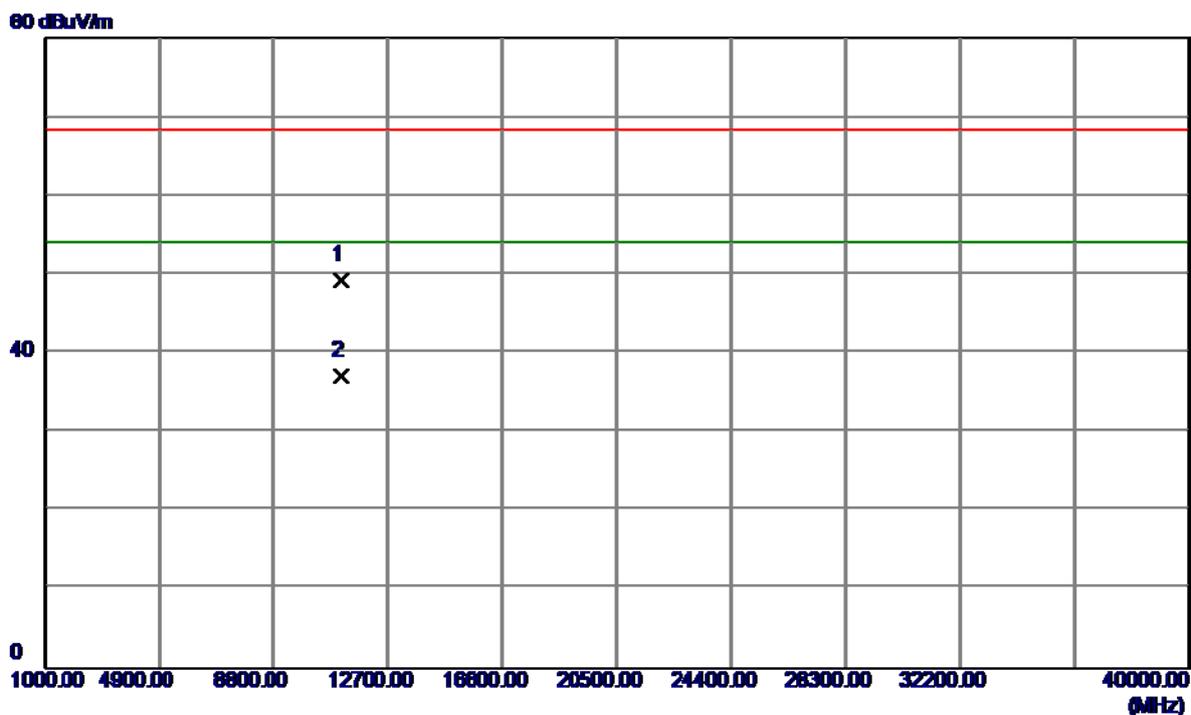

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11102.0500	33.29	15.99	49.28	68.30	-19.02	Peak	
2	11102.0500	21.17	15.99	37.16	54.00	-16.84	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical

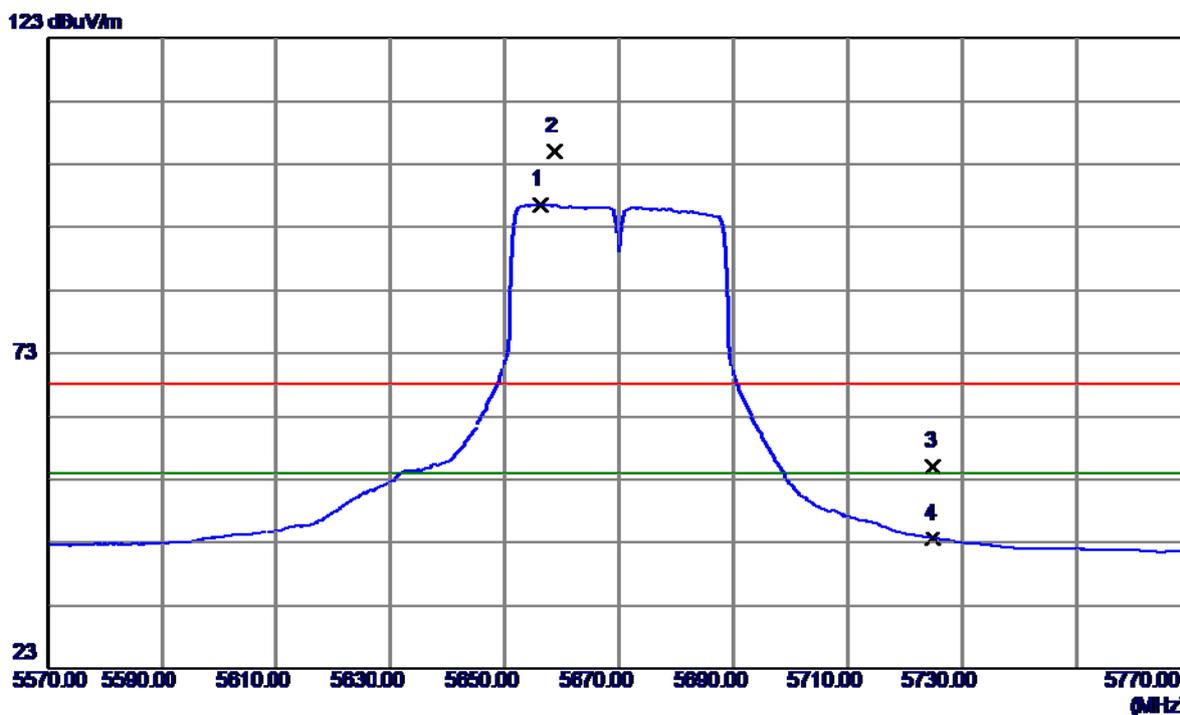

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5656.2000	55.49	41.17	96.66	54.00	42.66	AVG	no limit
2	5658.6000	63.86	41.18	105.04	68.30	36.74	Peak	no limit
3	5725.0000	13.73	41.27	55.00	68.30	-13.30	Peak	
4	5725.0000	2.36	41.27	43.63	54.00	-10.37	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical

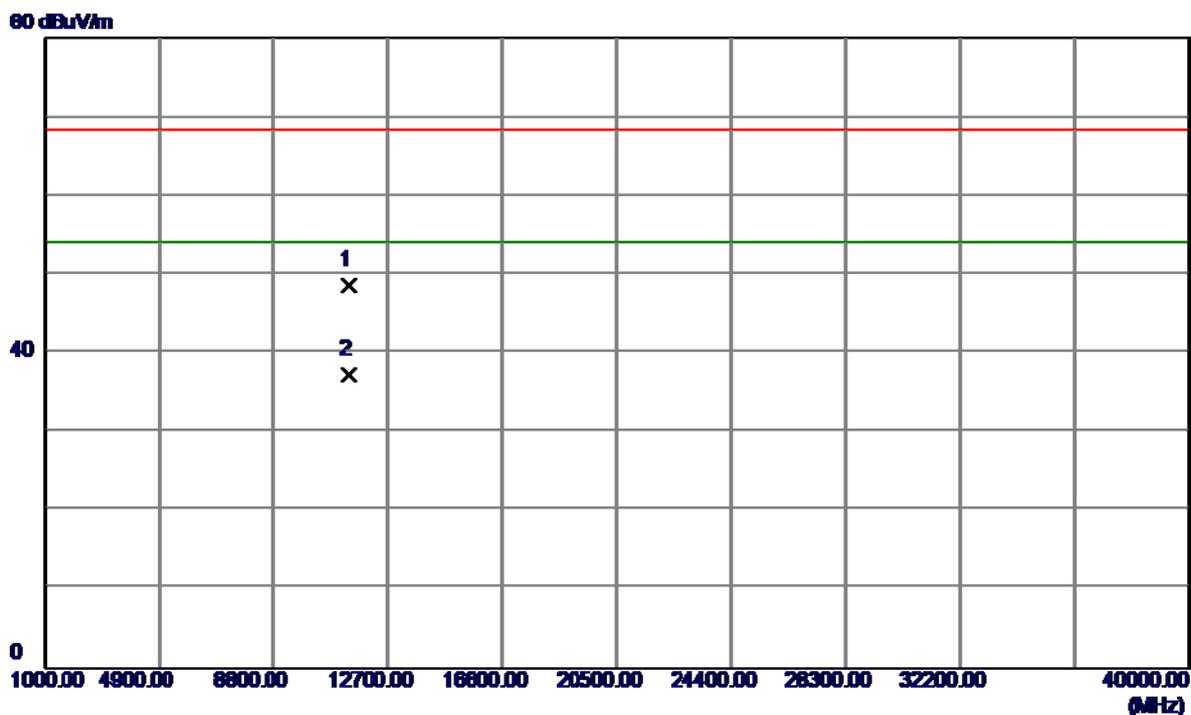

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11342.7600	32.11	16.56	48.67	68.30	-19.63	Peak	
2	11342.7600	20.70	16.56	37.26	54.00	-16.74	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

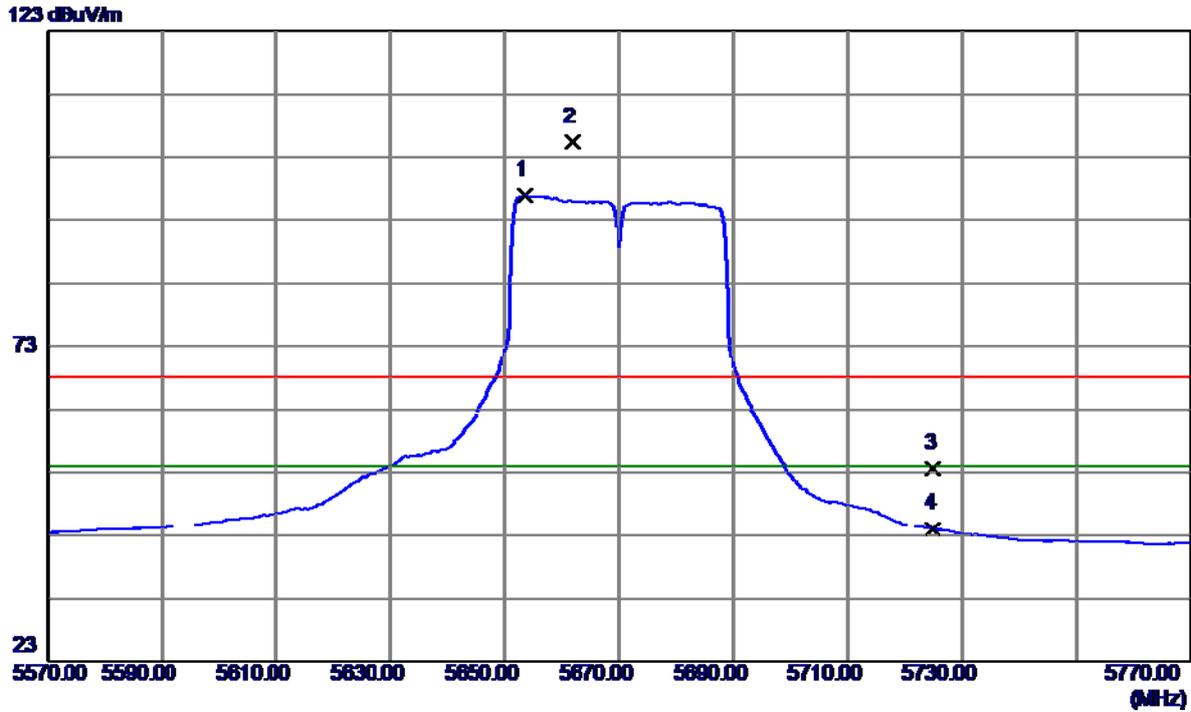

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5653.6000	55.75	41.17	96.92	54.00	42.92	AVG	no limit
2	5661.8000	64.23	41.18	105.41	68.30	37.11	Peak	no limit
3	5725.0000	12.32	41.27	53.59	68.30	-14.71	Peak	
4	5725.0000	2.83	41.27	44.10	54.00	-9.90	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Horizontal

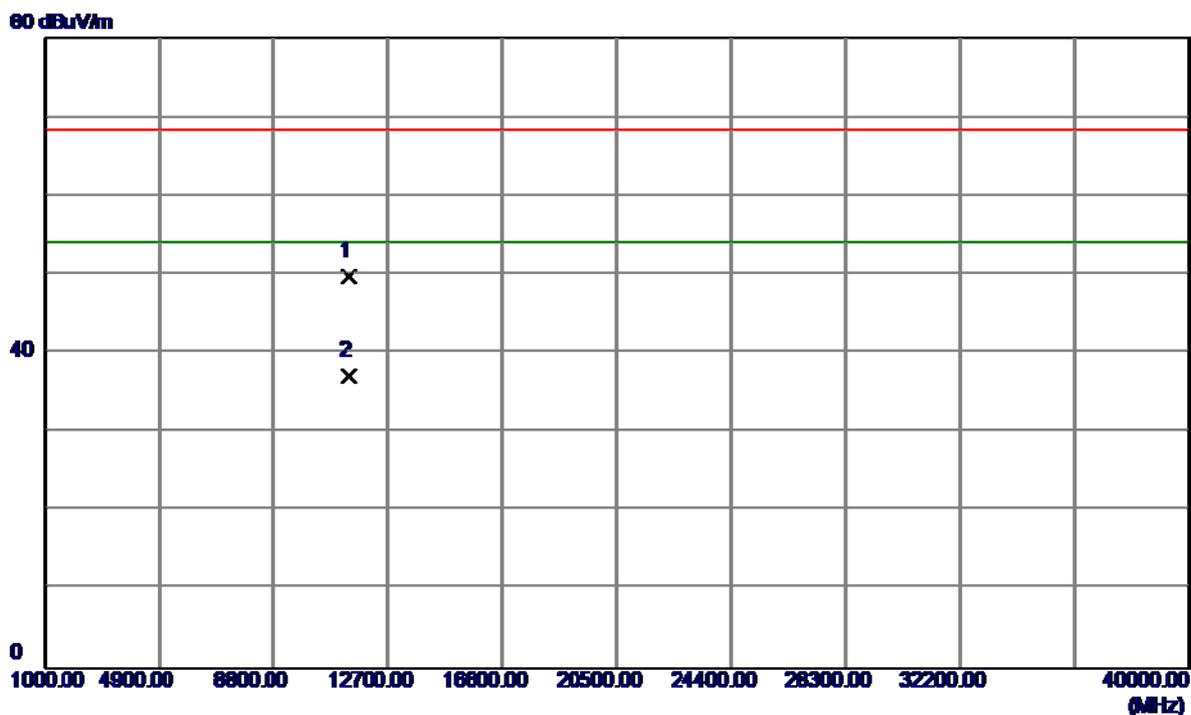

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11340.5800	33.25	16.56	49.81	68.30	-18.49	Peak	
2	11340.5800	20.50	16.56	37.06	54.00	-16.94	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Vertical

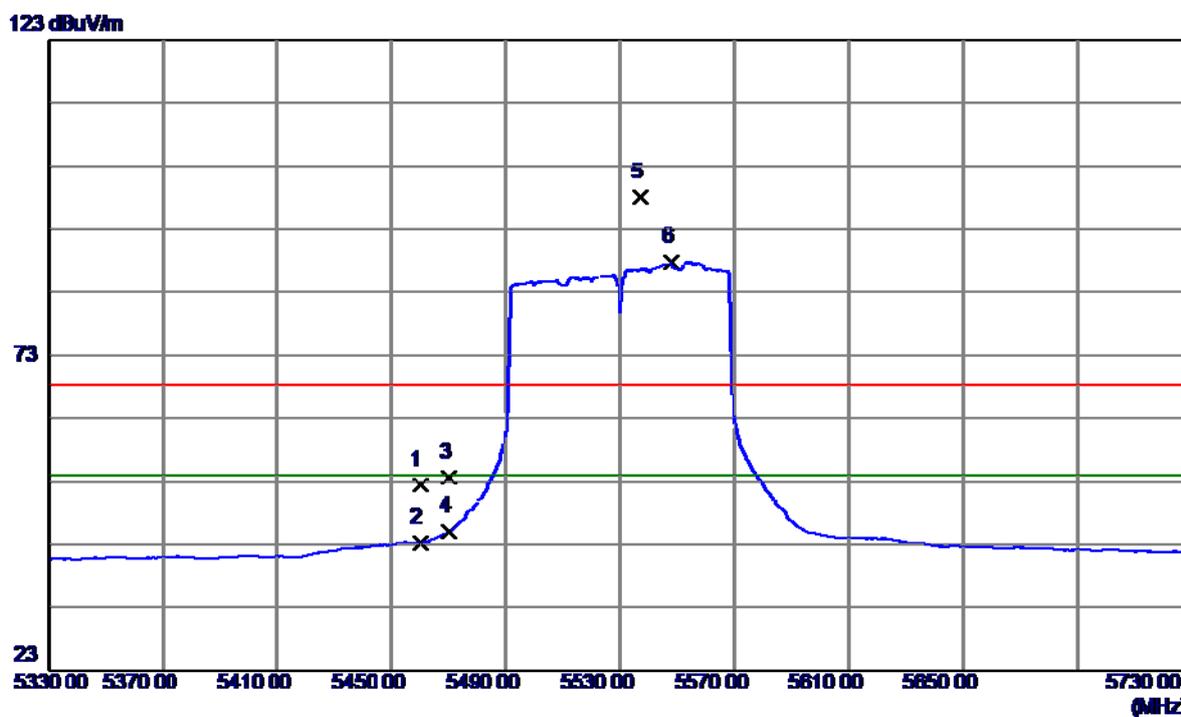

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	11.46	40.88	52.34	68.30	-15.96	Peak	
2	5460.0000	2.25	40.88	43.13	54.00	-10.87	AVG	
3	5470.0000	12.77	40.90	53.67	68.30	-14.63	Peak	
4	5470.0000	4.14	40.90	45.04	54.00	-8.96	AVG	
5	5537.2000	56.96	41.01	97.97	68.30	29.67	Peak	no limit
6	5547.6000	46.75	41.02	87.77	54.00	33.77	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

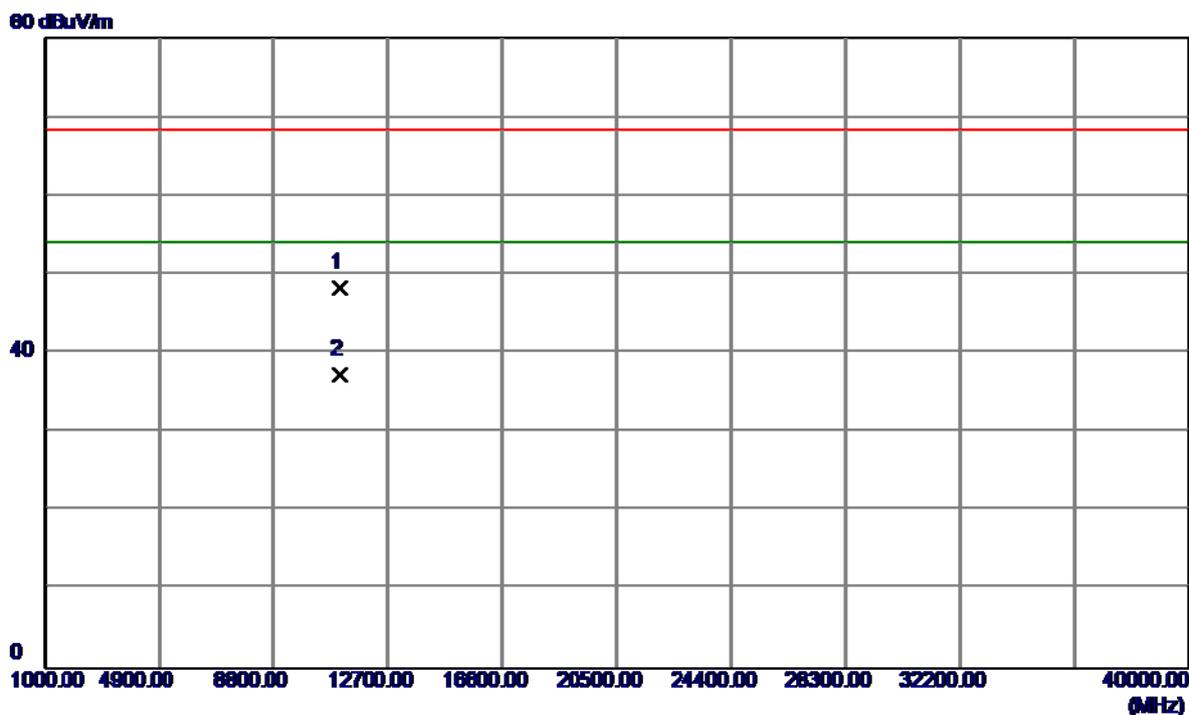


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11062.8500	32.45	15.90	48.35	68.30	-19.95	Peak	
2	11062.8500	21.31	15.90	37.21	54.00	-16.79	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal


123 dBuV/m

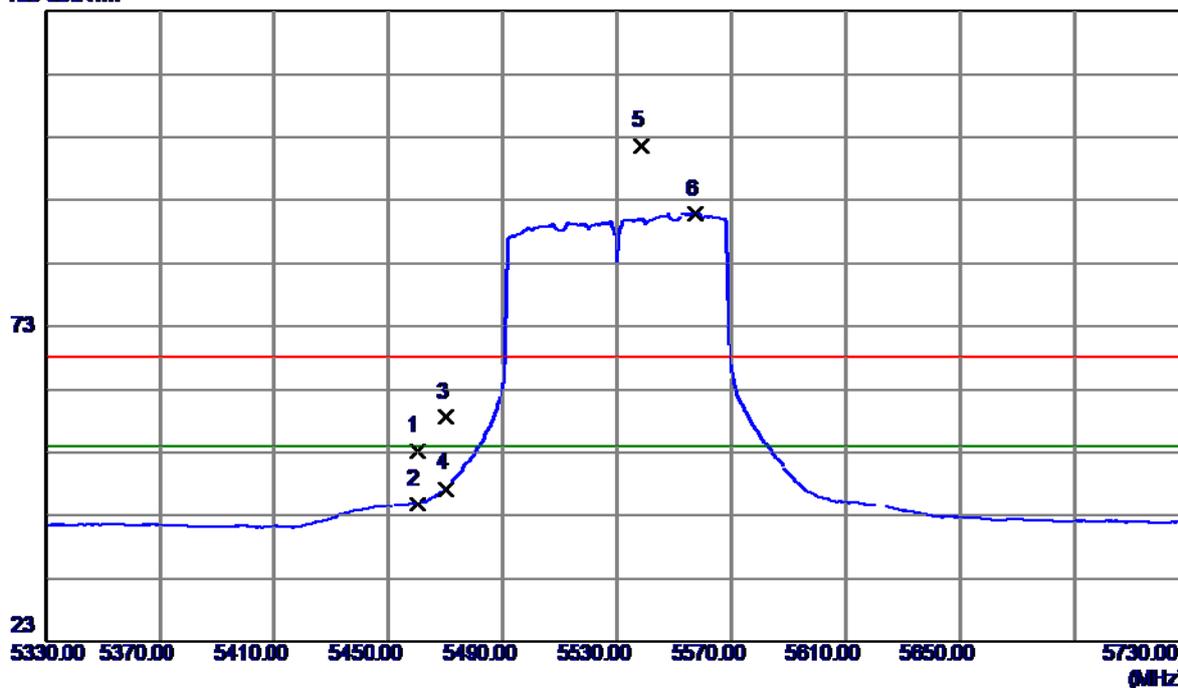

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5460.0000	12.37	40.88	53.25	68.30	-15.05	Peak	
2	5460.0000	3.90	40.88	44.78	54.00	-9.22	AVG	
3	5470.0000	17.76	40.90	58.66	68.30	-9.64	Peak	
4	5470.0000	6.40	40.90	47.30	54.00	-6.70	AVG	
5	5538.4000	60.59	41.01	101.60	68.30	33.30	Peak	no limit
6	5557.6000	49.83	41.04	90.87	54.00	36.87	AVG	no limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz


Horizontal

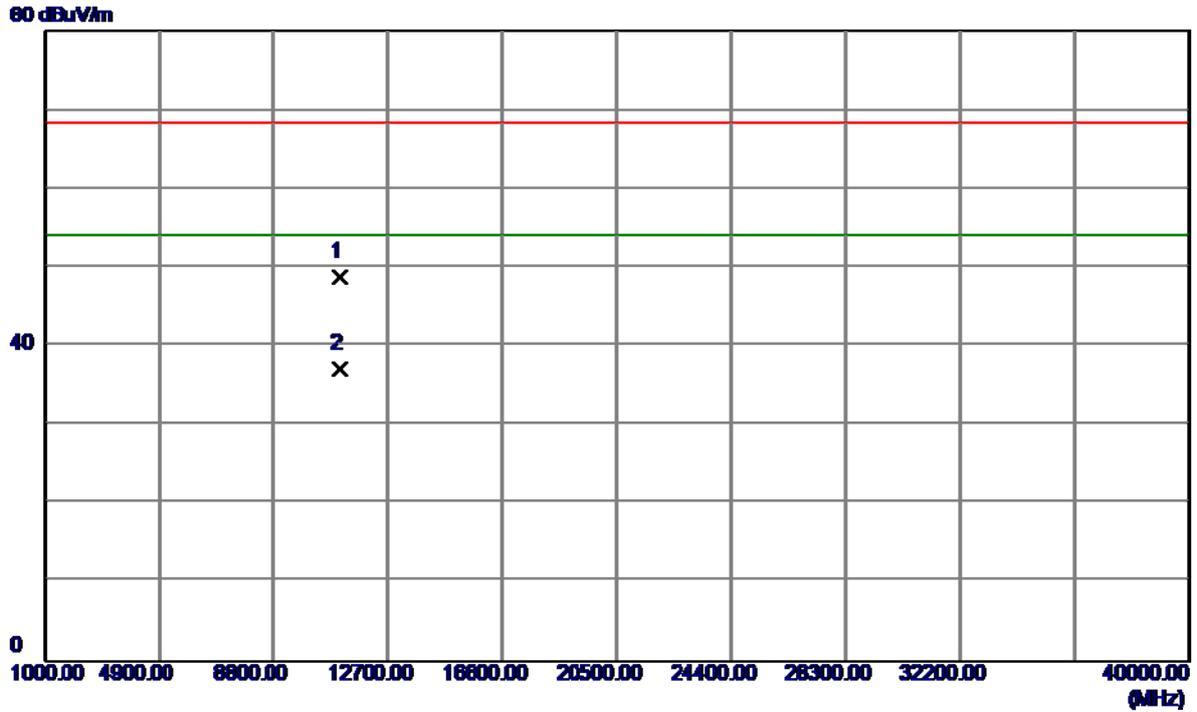

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11059.6400	32.86	15.89	48.75	68.30	-19.55	Peak	
2	11059.6400	21.24	15.89	37.13	54.00	-16.87	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz


Vertical

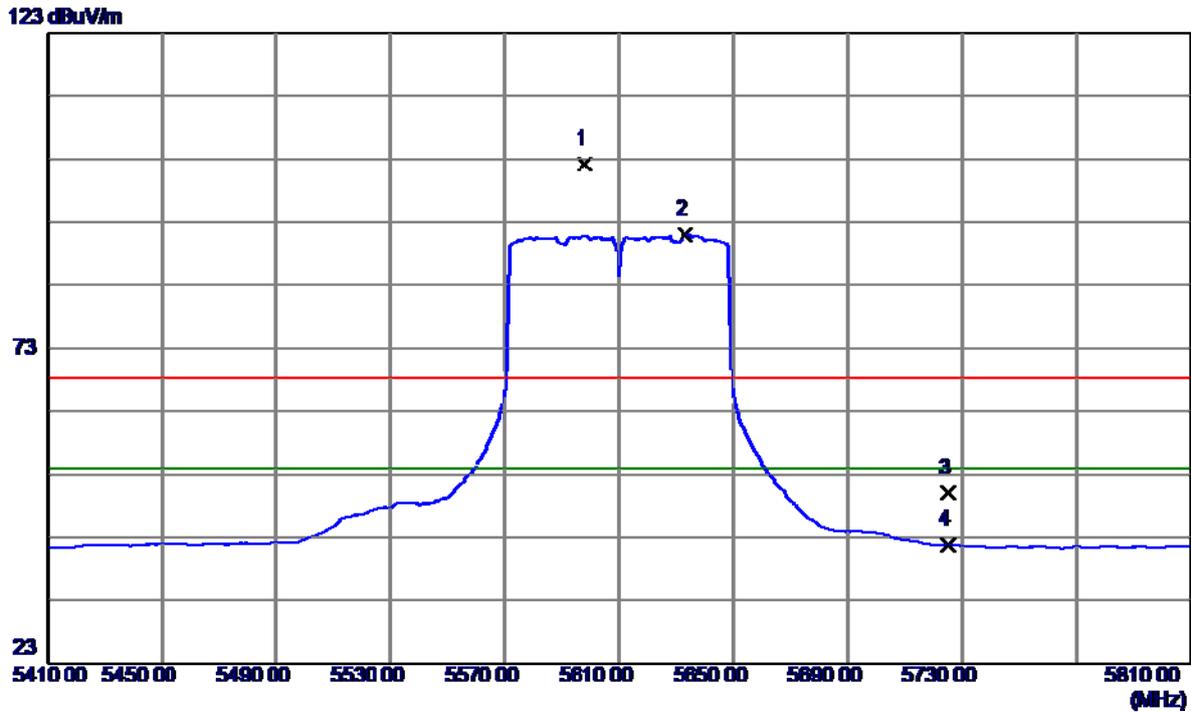

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5598.0000	61.11	41.09	102.20	68.30	33.90	Peak	no limit
2	5633.2000	49.81	41.14	90.95	54.00	36.95	AVG	no limit
3	5725.0000	8.76	41.27	50.03	68.30	-18.27	Peak	
4	5725.0000	0.56	41.27	41.83	54.00	-12.17	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

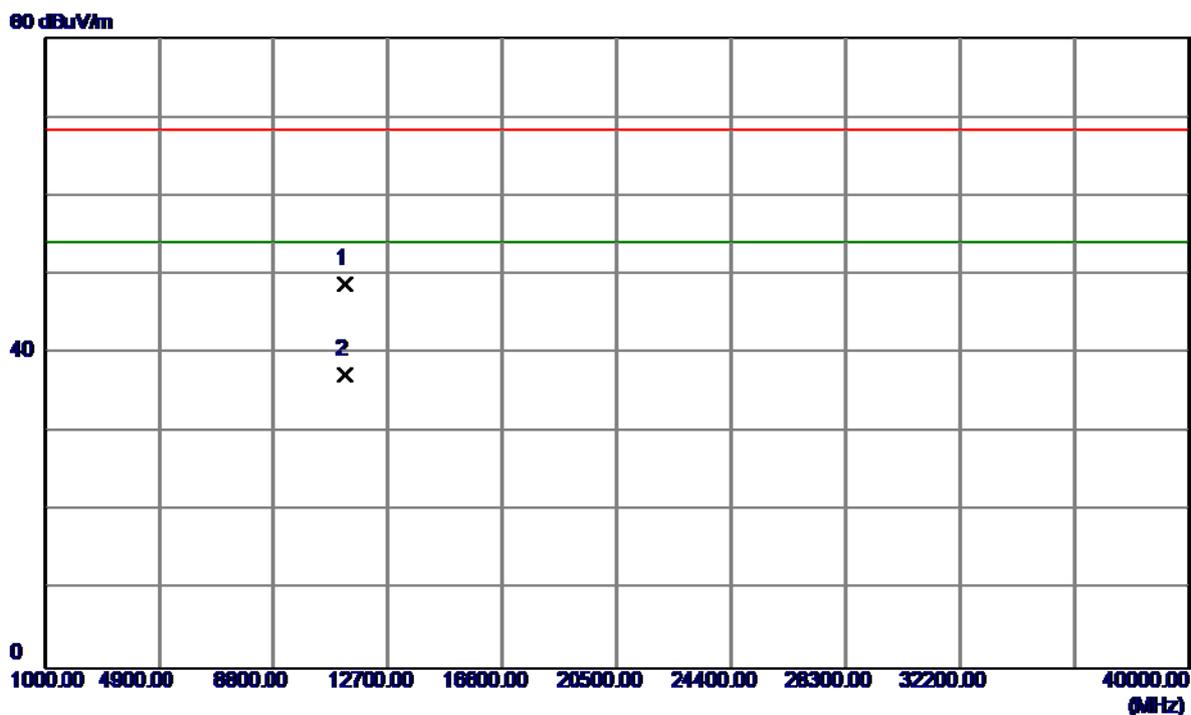


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11220.2800	32.49	16.27	48.76	68.30	-19.54	Peak	
2	11220.2800	20.97	16.27	37.24	54.00	-16.76	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal


123 dBuV/m

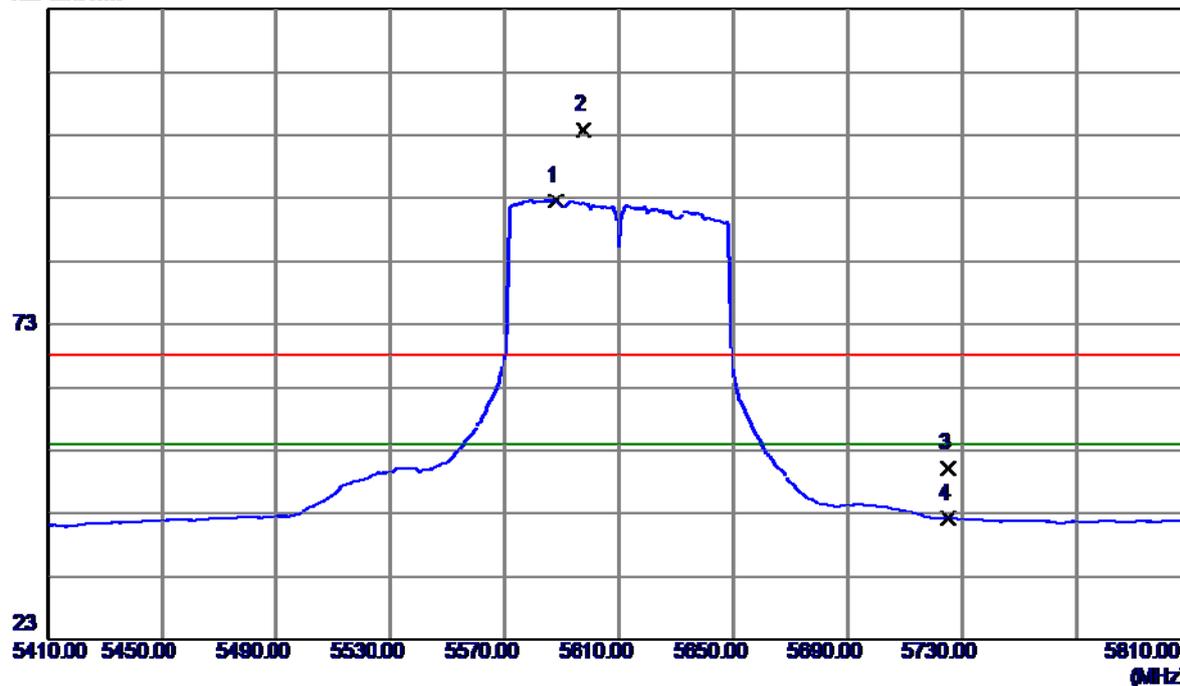

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5587.6000	51.61	41.08	92.69	54.00	38.69	AVG	no limit
2	5597.6000	62.79	41.09	103.88	68.30	35.58	Peak	no limit
3	5725.0000	8.87	41.27	50.14	68.30	-18.16	Peak	
4	5725.0000	0.88	41.27	42.15	54.00	-11.85	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

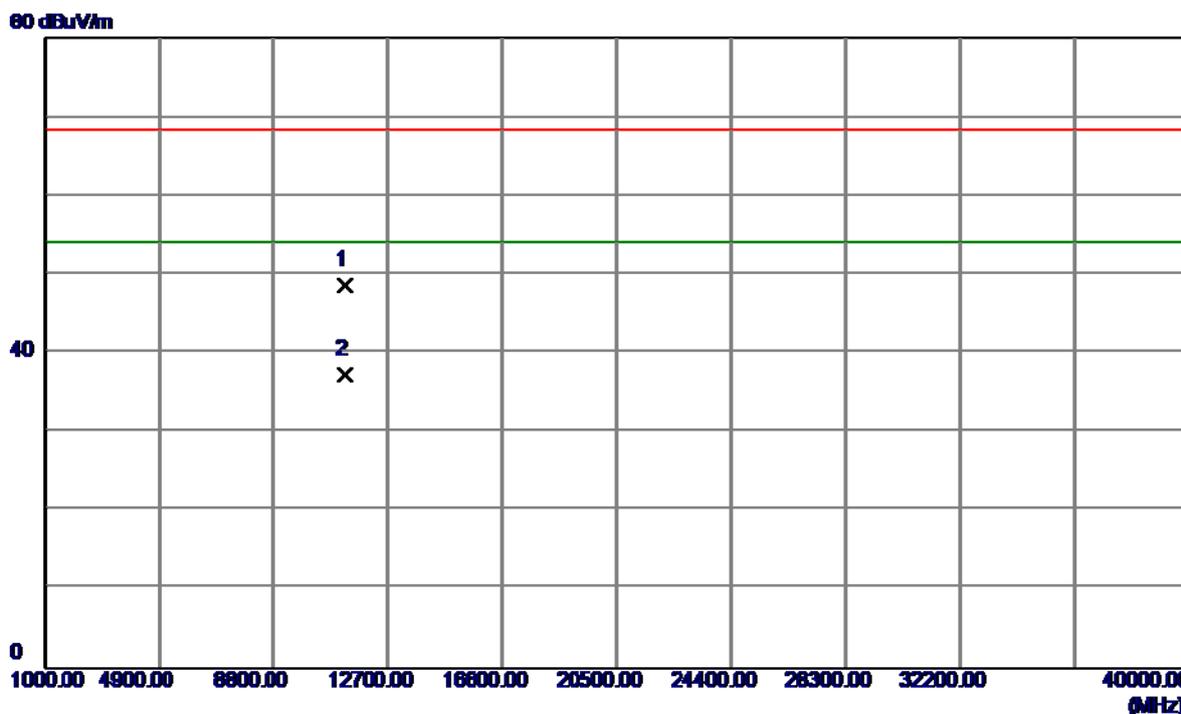


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11221.0599	32.40	16.27	48.67	68.30	-19.63	Peak	
2	11221.0599	20.97	16.27	37.24	54.00	-16.76	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical


128 dBuV/m

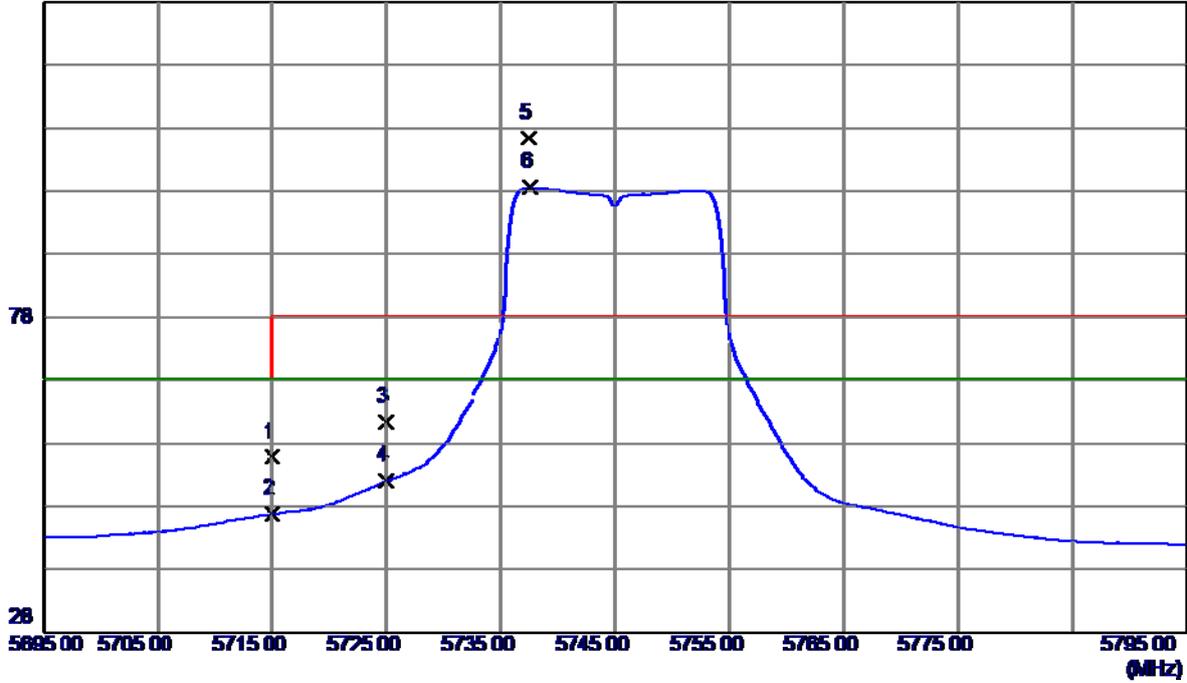

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	14.59	41.25	55.84	68.30	-12.46	Peak	
2	5715.0000	5.53	41.25	46.78	68.30	-21.52	AVG	
3	5725.0000	20.21	41.27	61.48	78.30	-16.82	Peak	
4	5725.0000	10.70	41.27	51.97	68.30	-16.33	AVG	
5	5737.4000	65.15	41.28	106.43	78.30	28.13	Peak	no limit
6	5737.6000	57.23	41.28	98.51	68.30	30.21	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Vertical

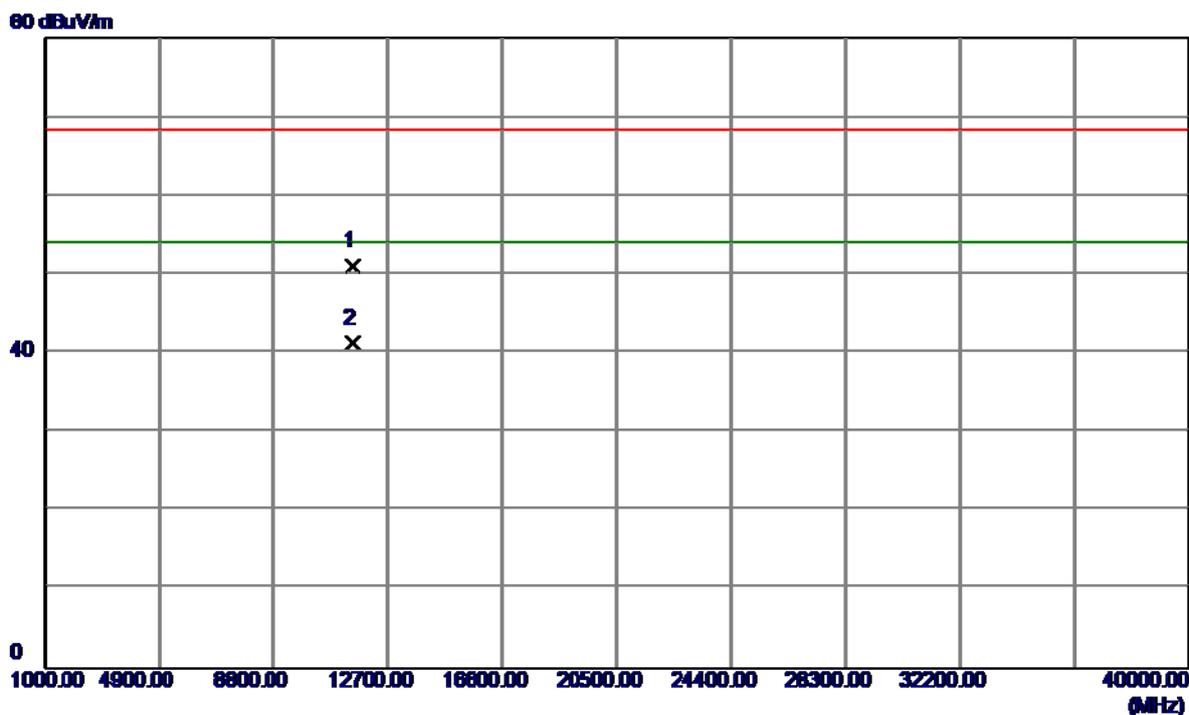

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.3700	34.06	16.91	50.97	68.30	-17.33	Peak	
2	11490.3700	24.36	16.91	41.27	54.00	-12.73	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz


Horizontal

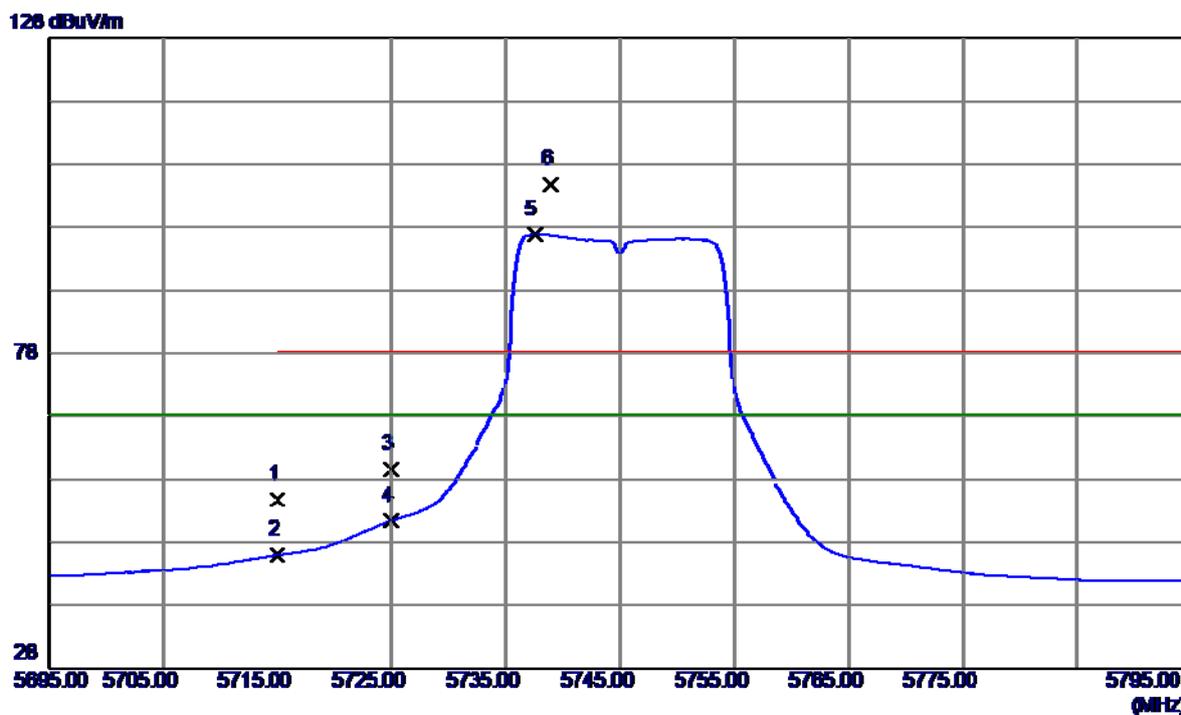

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	13.53	41.25	54.78	68.30	-13.52	Peak	
2	5715.0000	4.70	41.25	45.95	68.30	-22.35	AVG	
3	5725.0000	18.32	41.27	59.59	78.30	-18.71	Peak	
4	5725.0000	10.07	41.27	51.34	68.30	-16.96	AVG	
5	5737.5000	55.58	41.28	96.86	68.30	28.56	AVG	no limit
6	5738.9000	63.54	41.28	104.82	78.30	26.52	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal

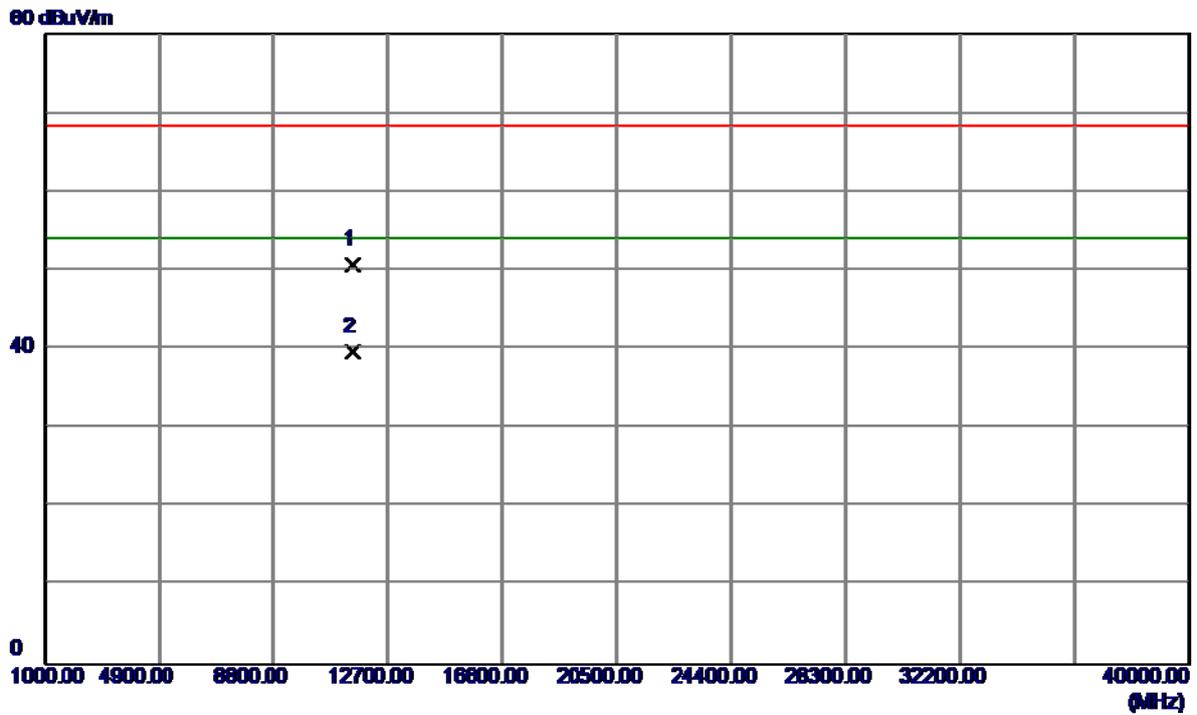


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11490.7600	33.76	16.91	50.67	68.30	-17.63	Peak	
2	11490.7600	22.78	16.91	39.69	54.00	-14.31	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical


128 dBuV/m

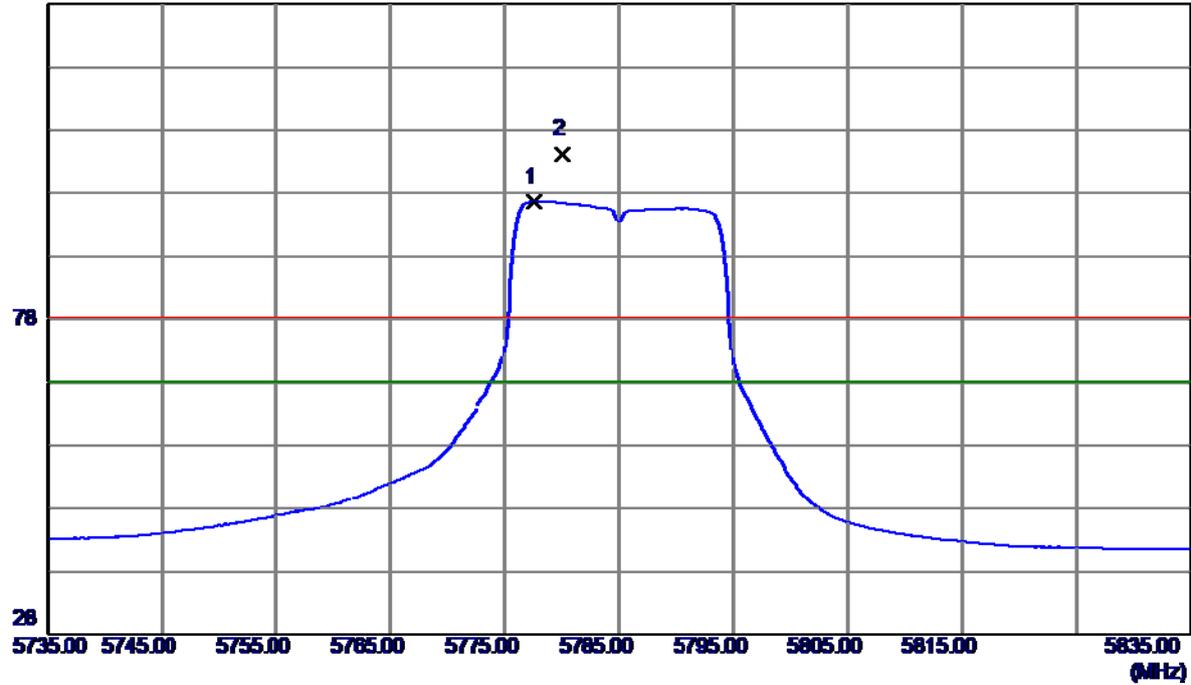

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5777.6000	55.27	41.34	96.61	68.30	28.31	AVG	no limit
2	5780.0000	62.91	41.34	104.25	78.30	25.95	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Vertical

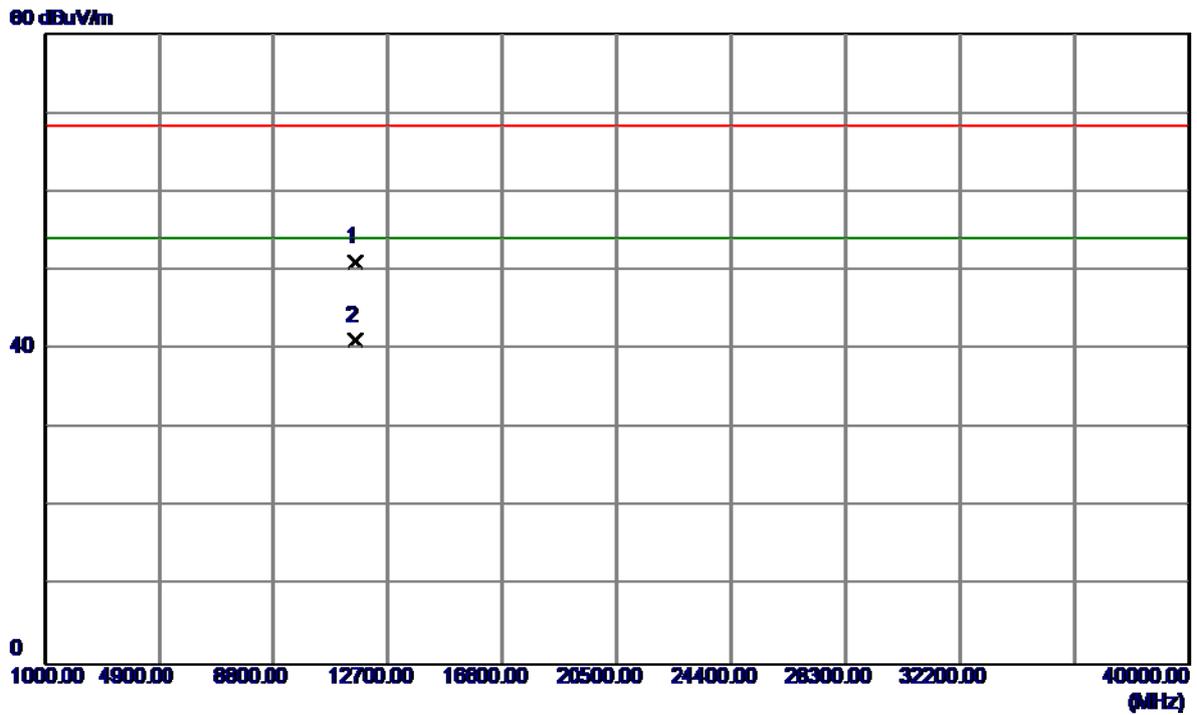


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.6700	33.93	17.05	50.98	68.30	-17.32	Peak	
2	11570.6700	24.00	17.05	41.05	54.00	-12.95	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal


128 dBuV/m

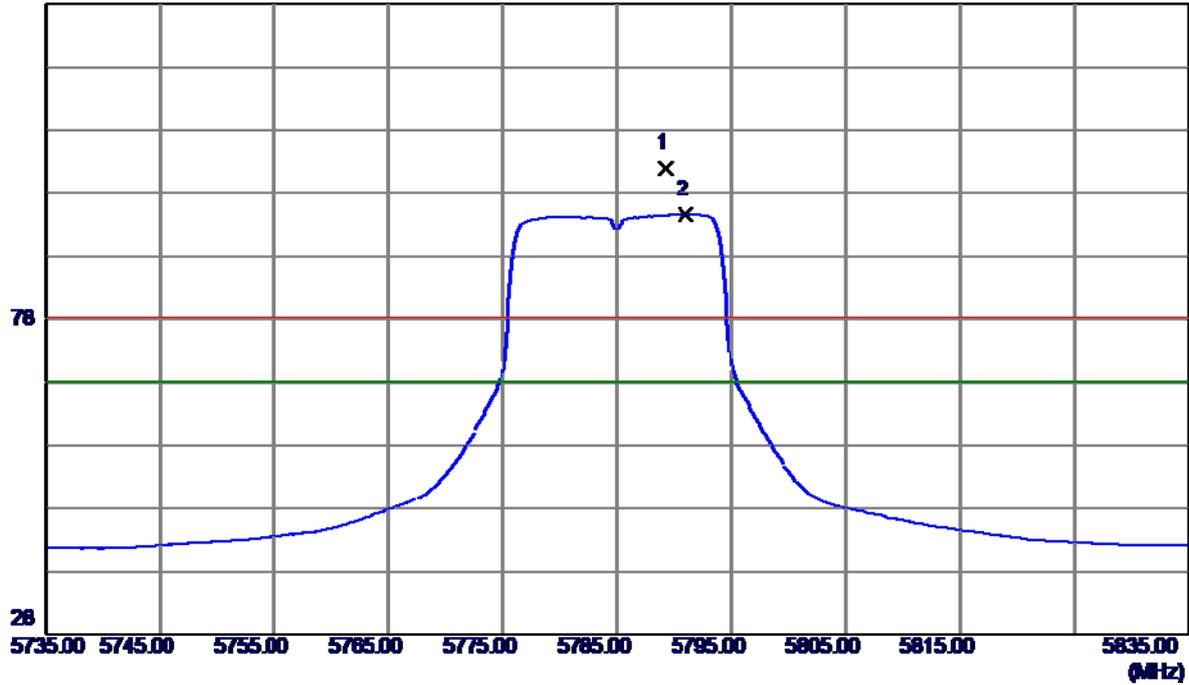

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5789.2000	60.58	41.35	101.93	78.30	23.63	Peak	no limit
2	5791.0000	53.28	41.36	94.64	68.30	26.34	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5785MHz

Horizontal

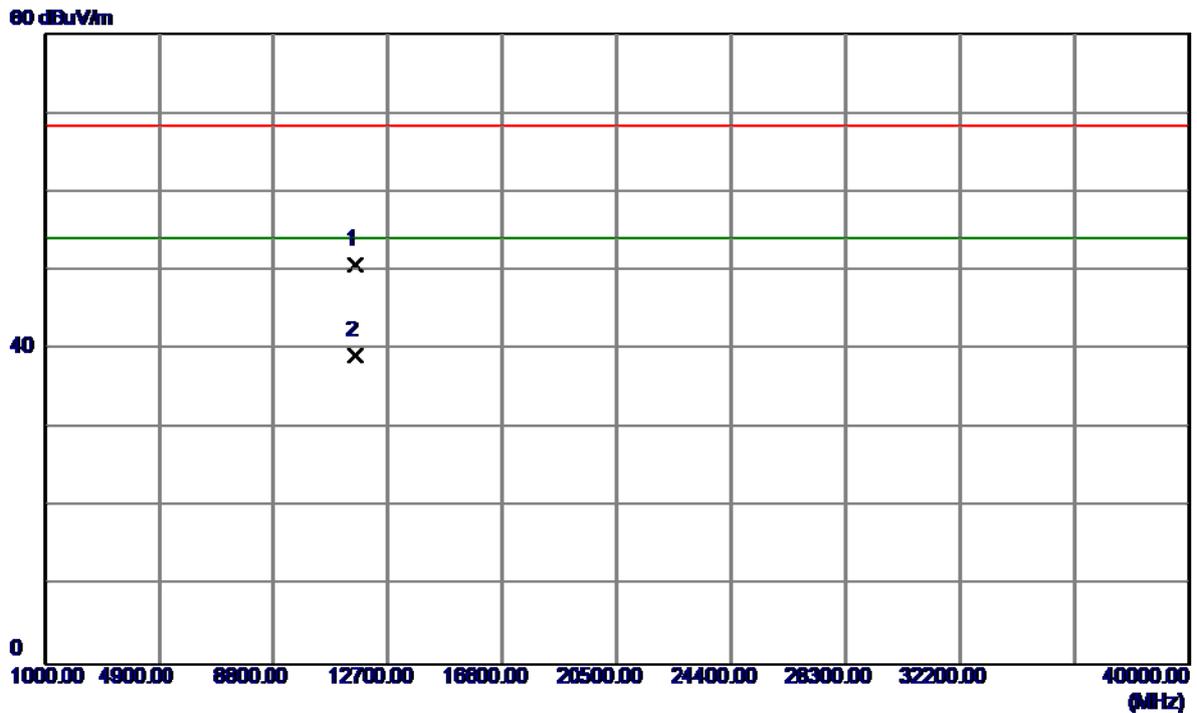


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11570.7500	33.61	17.05	50.66	68.30	-17.64	Peak	
2	11570.7500	22.10	17.05	39.15	54.00	-14.85	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical


128 dBuV/m

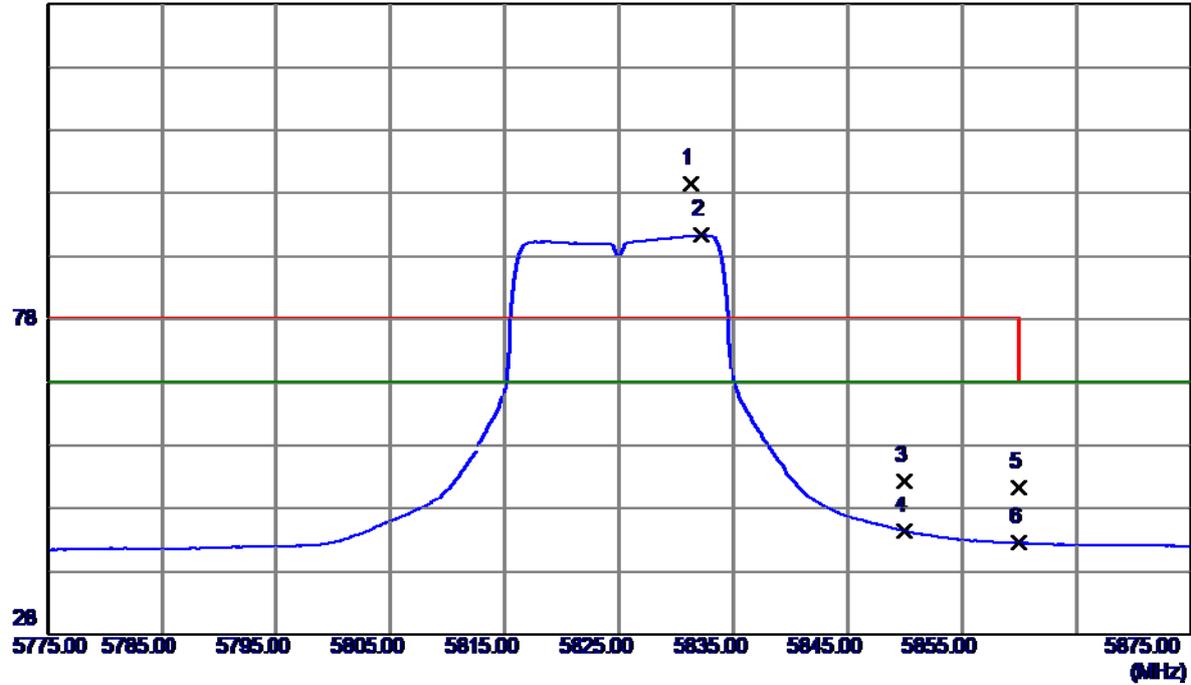

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5831.3000	58.22	41.41	99.63	78.30	21.33	Peak	no limit
2	5832.2000	49.92	41.41	91.33	68.30	23.03	AVG	no limit
3	5850.0000	10.89	41.44	52.33	78.30	-25.97	Peak	
4	5850.0000	2.98	41.44	44.42	68.30	-23.88	AVG	
5	5860.0000	9.96	41.45	51.41	78.30	-26.89	Peak	
6	5860.0000	1.13	41.45	42.58	68.30	-25.72	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical

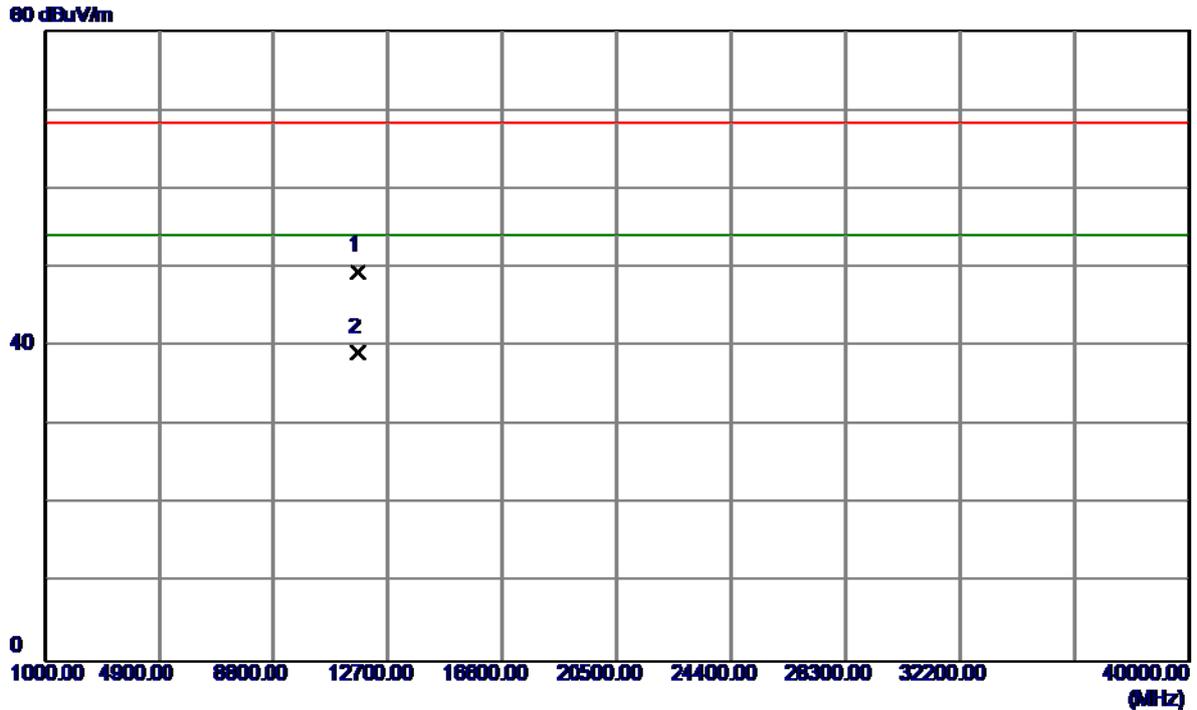


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.7600	32.35	17.17	49.52	68.30	-18.78	Peak	
2	11650.7600	22.00	17.17	39.17	54.00	-14.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal


128 dBuV/m

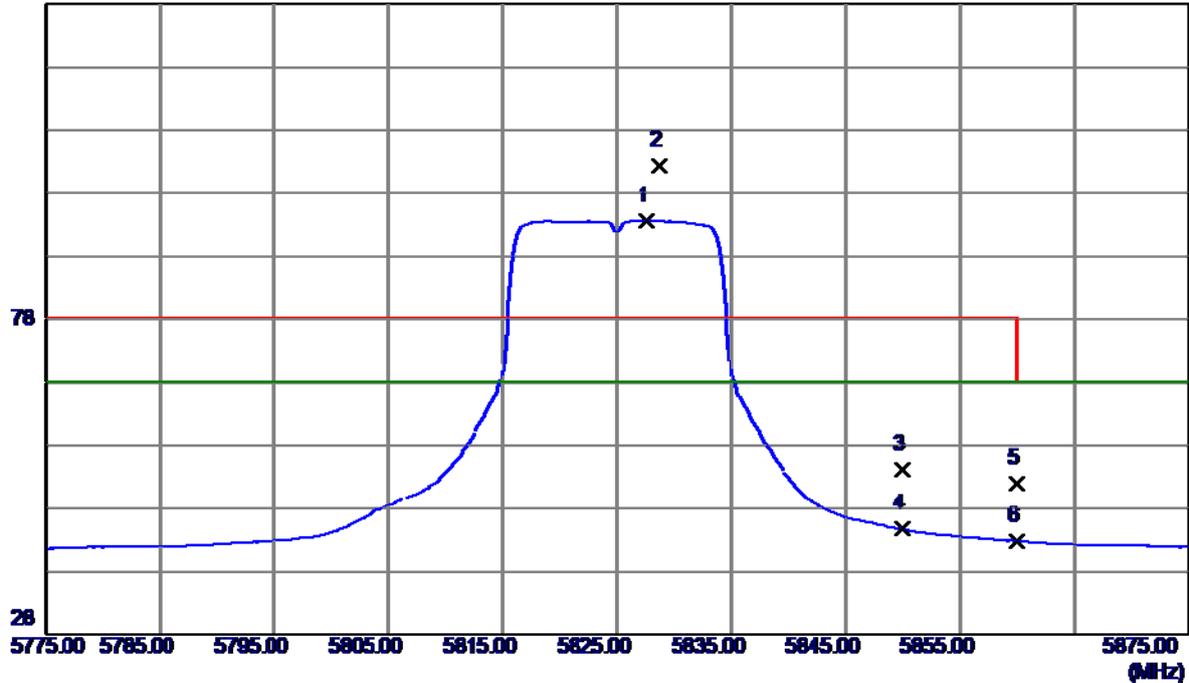

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5827.6000	52.21	41.41	93.62	68.30	25.32	AVG	no limit
2	5828.7000	60.97	41.41	102.38	78.30	24.08	Peak	no limit
3	5850.0000	12.68	41.44	54.12	78.30	-24.18	Peak	
4	5850.0000	3.28	41.44	44.72	68.30	-23.58	AVG	
5	5860.0000	10.48	41.45	51.93	78.30	-26.37	Peak	
6	5860.0000	1.38	41.45	42.83	68.30	-25.47	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Horizontal

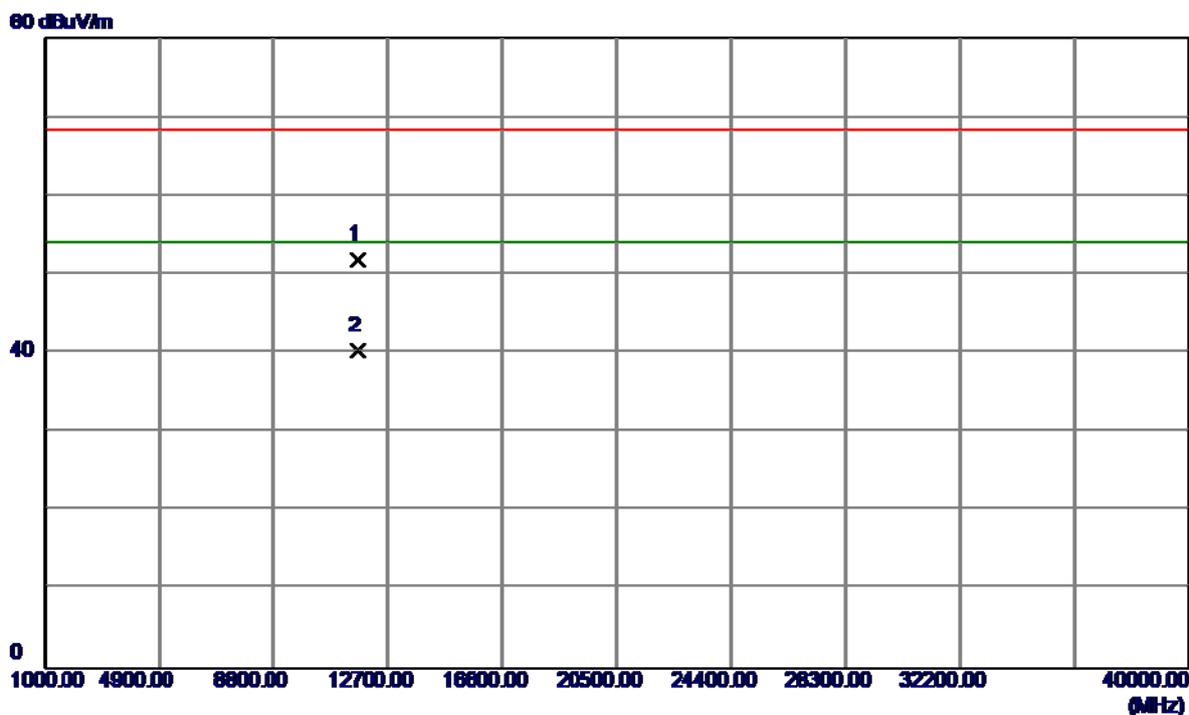

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11650.7500	34.65	17.17	51.82	68.30	-16.48	Peak	
2	11650.7500	23.20	17.17	40.37	54.00	-13.63	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

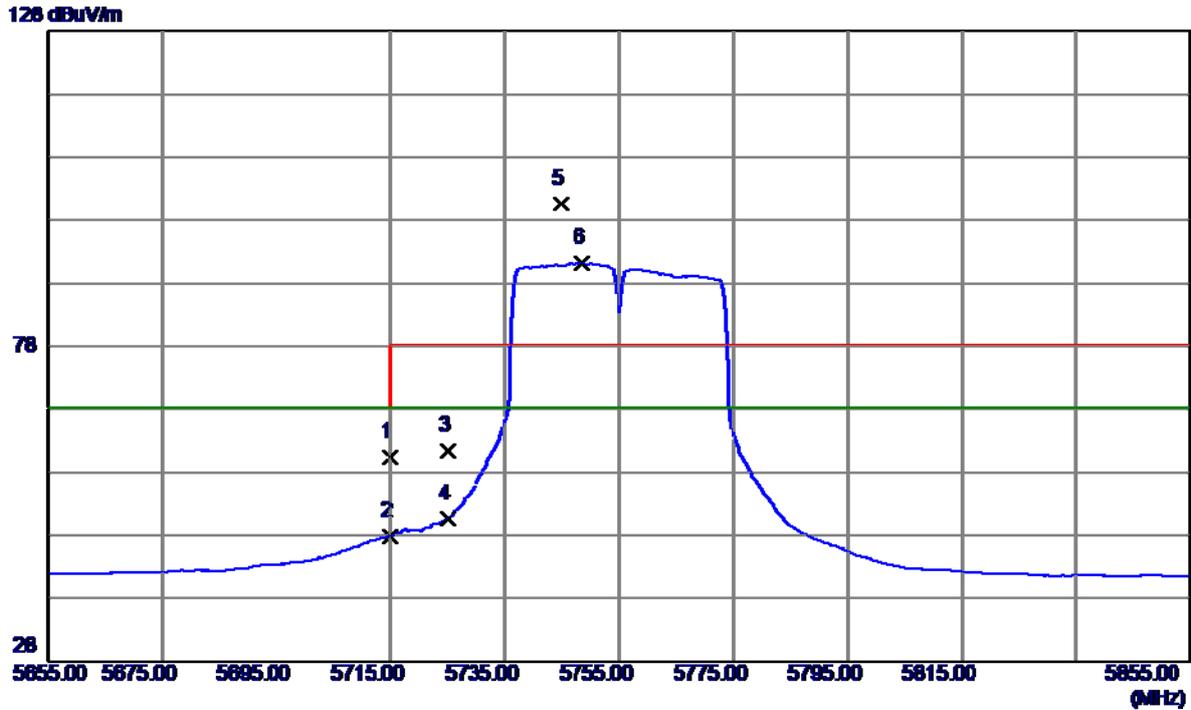

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	19.23	41.25	60.48	68.30	-7.82	Peak	
2	5715.0000	6.59	41.25	47.84	68.30	-20.46	AVG	
3	5725.0000	20.18	41.27	61.45	78.30	-16.85	Peak	
4	5725.0000	9.35	41.27	50.62	68.30	-17.68	AVG	
5	5744.8000	59.23	41.29	100.52	78.30	22.22	Peak	no limit
6	5748.6000	49.86	41.30	91.16	68.30	22.86	AVG	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

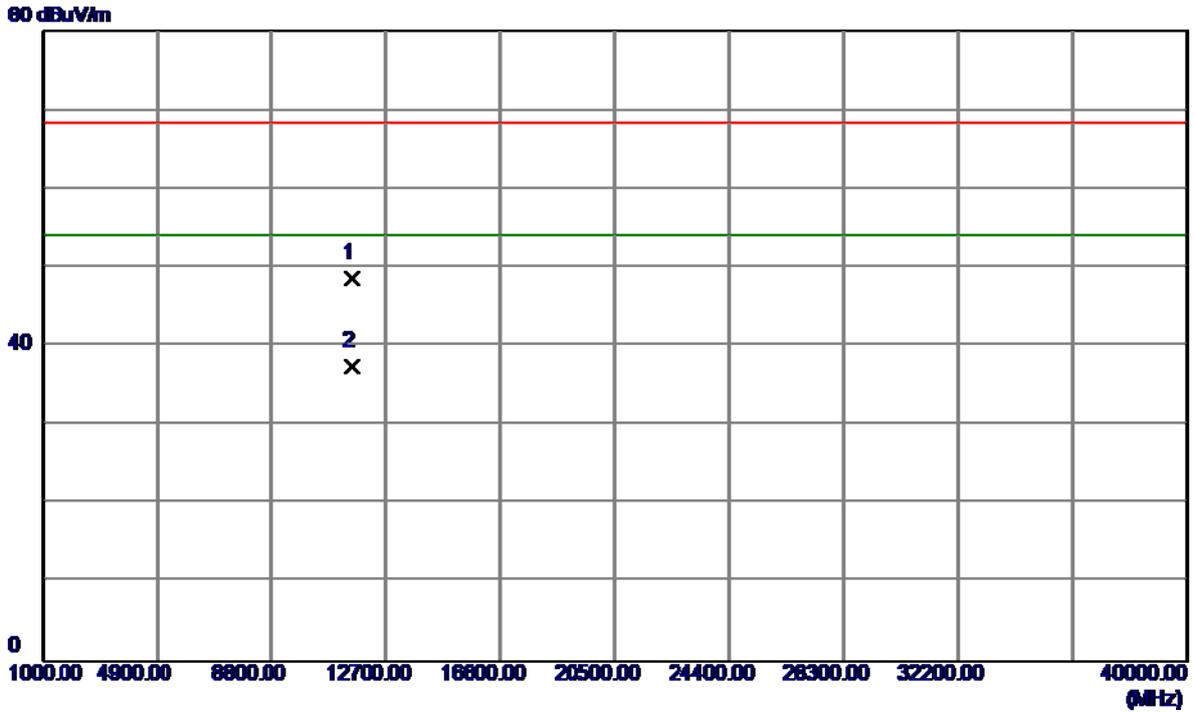


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11511.7900	31.74	16.95	48.69	68.30	-19.61	Peak	
2	11511.7900	20.51	16.95	37.46	54.00	-16.54	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal


128 dBuV/m

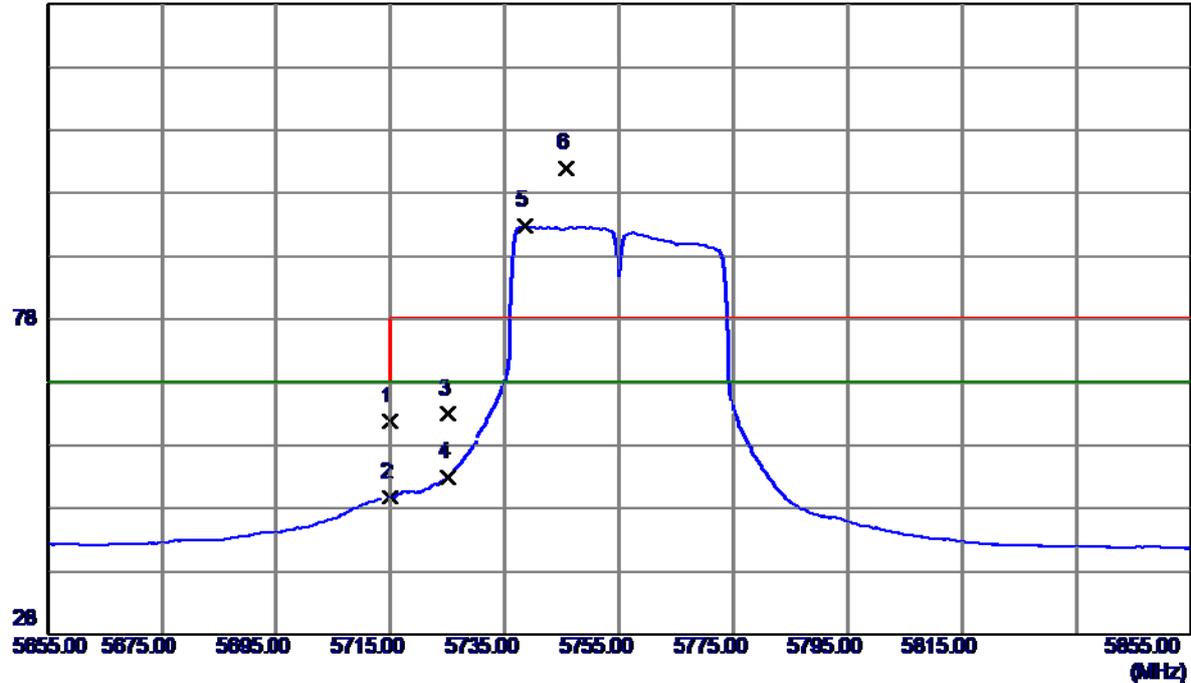

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	20.58	41.25	61.83	68.30	-6.47	Peak	
2	5715.0000	8.55	41.25	49.80	68.30	-18.50	AVG	
3	5725.0000	21.72	41.27	62.99	78.30	-15.31	Peak	
4	5725.0000	11.76	41.27	53.03	68.30	-15.27	AVG	
5	5738.6000	51.43	41.28	92.71	68.30	24.41	AVG	no limit
6	5745.6000	60.64	41.29	101.93	78.30	23.63	Peak	no limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

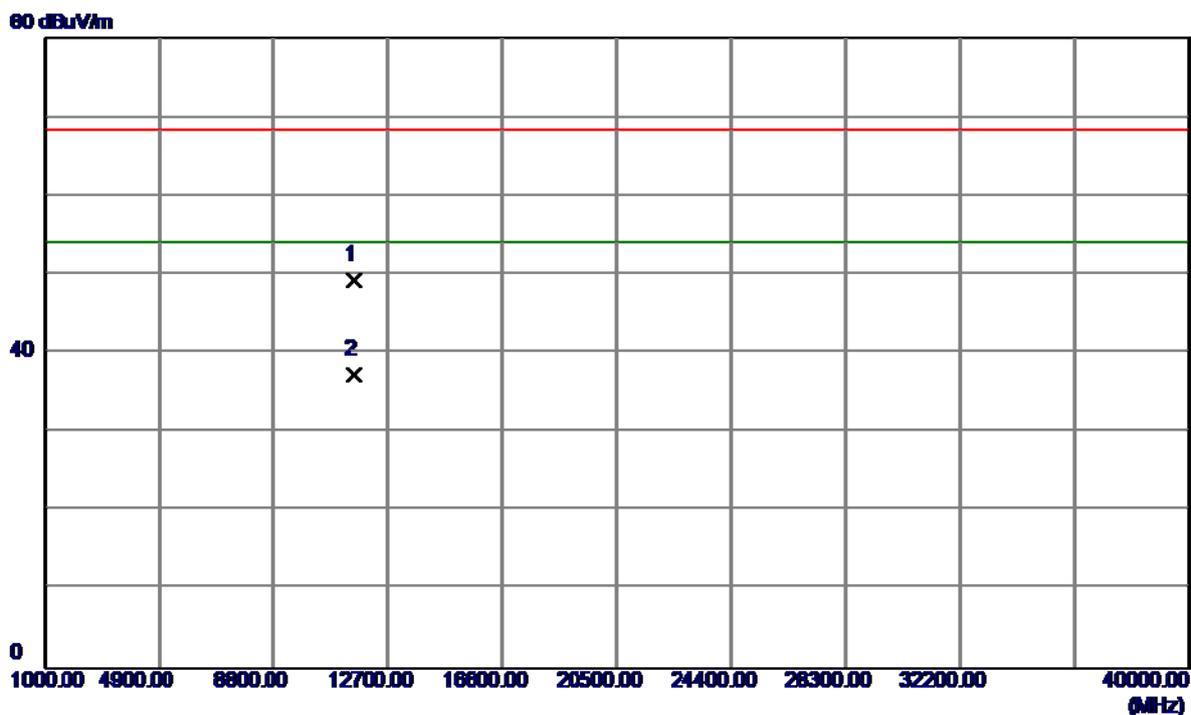

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11510.3400	32.33	16.95	49.28	68.30	-19.02	Peak	
2	11510.3400	20.39	16.95	37.34	54.00	-16.66	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

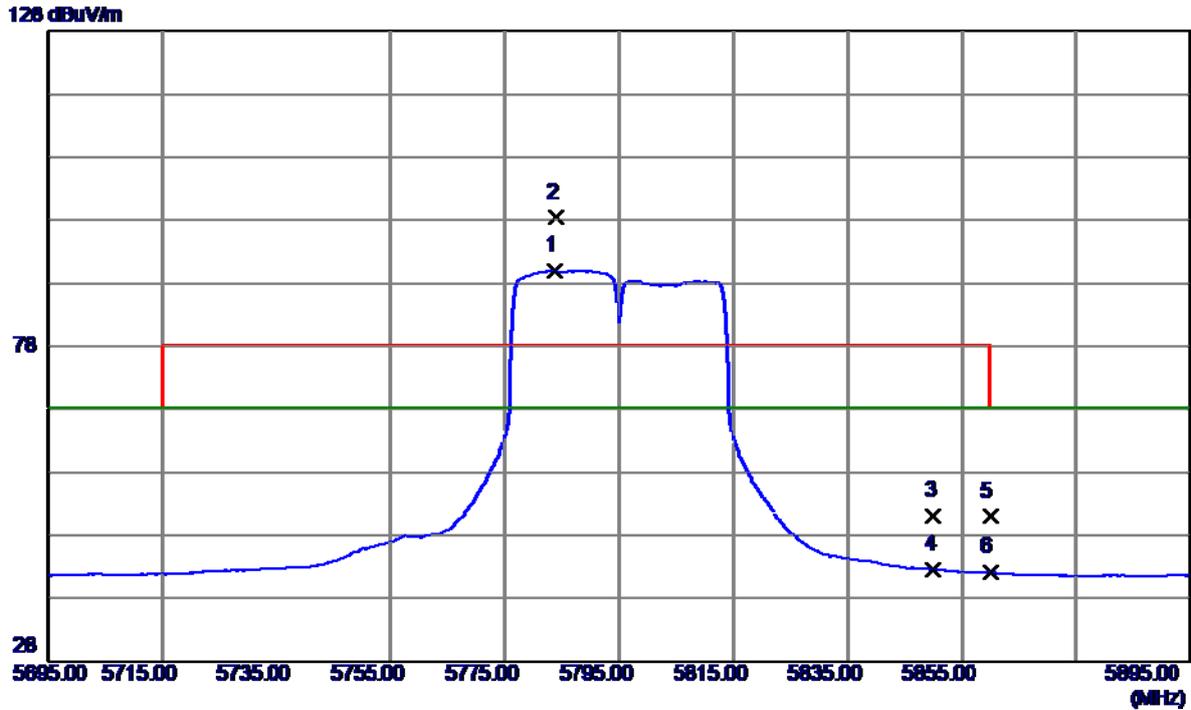

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5783.6000	48.72	41.35	90.07	68.30	21.77	AVG	no limit
2	5783.8000	57.02	41.35	98.37	78.30	20.07	Peak	no limit
3	5850.0000	9.66	41.44	51.10	78.30	-27.20	Peak	
4	5850.0000	1.22	41.44	42.66	68.30	-25.64	AVG	
5	5860.0000	9.62	41.45	51.07	78.30	-27.23	Peak	
6	5860.0000	0.68	41.45	42.13	68.30	-26.17	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical

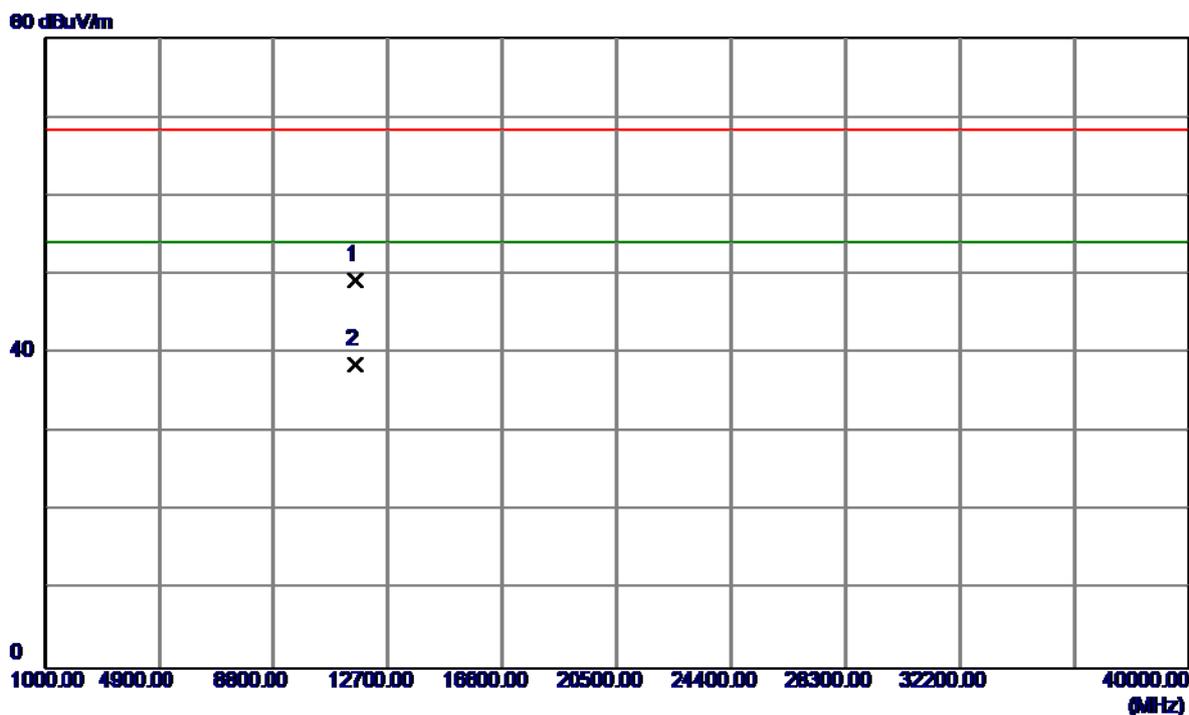


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11589.6700	32.19	17.08	49.27	68.30	-19.03	Peak	
2	11589.6700	21.43	17.08	38.51	54.00	-15.49	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal


128 dBuV/m

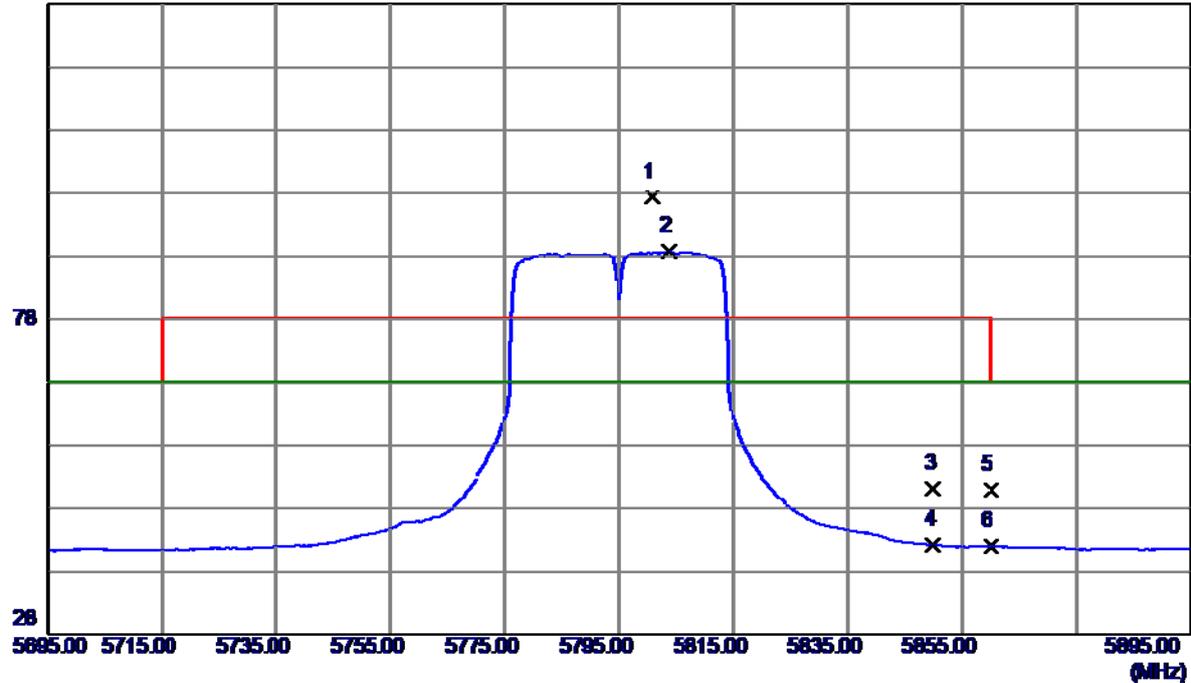

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5800.8000	55.98	41.37	97.35	78.30	19.05	Peak	no limit
2	5803.6000	47.37	41.37	88.74	68.30	20.44	AVG	no limit
3	5850.0000	9.79	41.44	51.23	78.30	-27.07	Peak	
4	5850.0000	0.78	41.44	42.22	68.30	-26.08	AVG	
5	5860.0000	9.52	41.45	50.97	78.30	-27.33	Peak	
6	5860.0000	0.47	41.45	41.92	68.30	-26.38	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

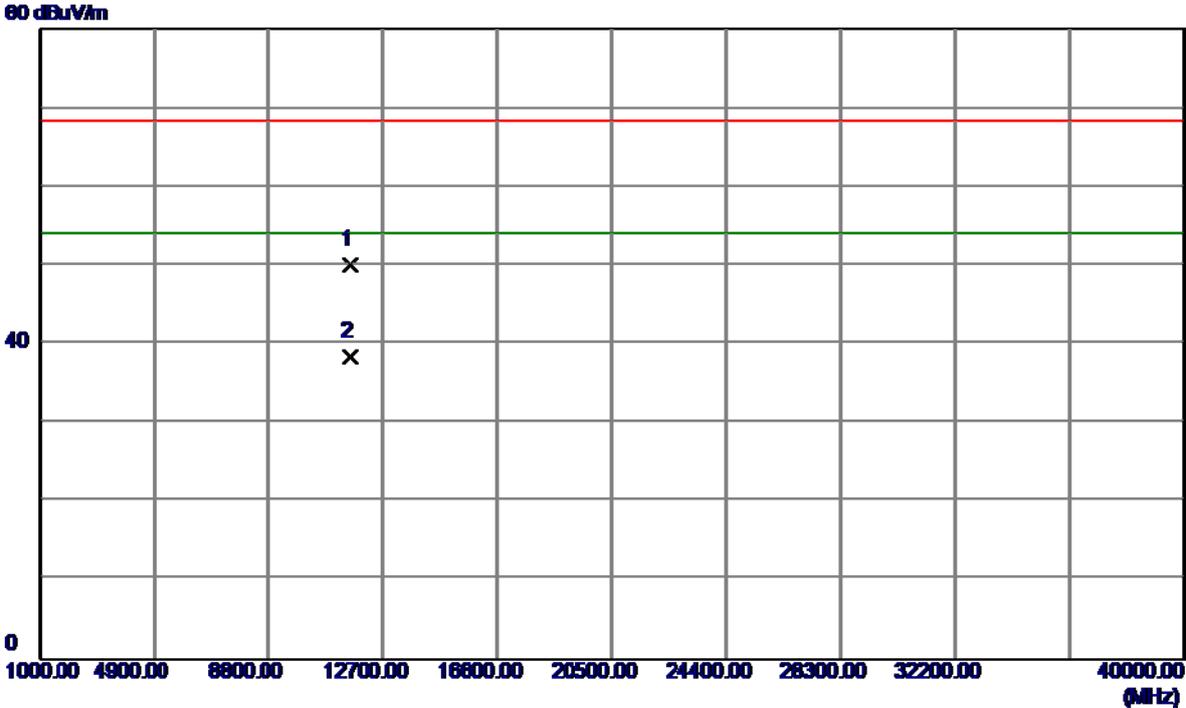


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11592.2500	32.95	17.08	50.03	68.30	-18.27	Peak	
2	11592.2500	21.29	17.08	38.37	54.00	-15.63	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical


128 dBuV/m

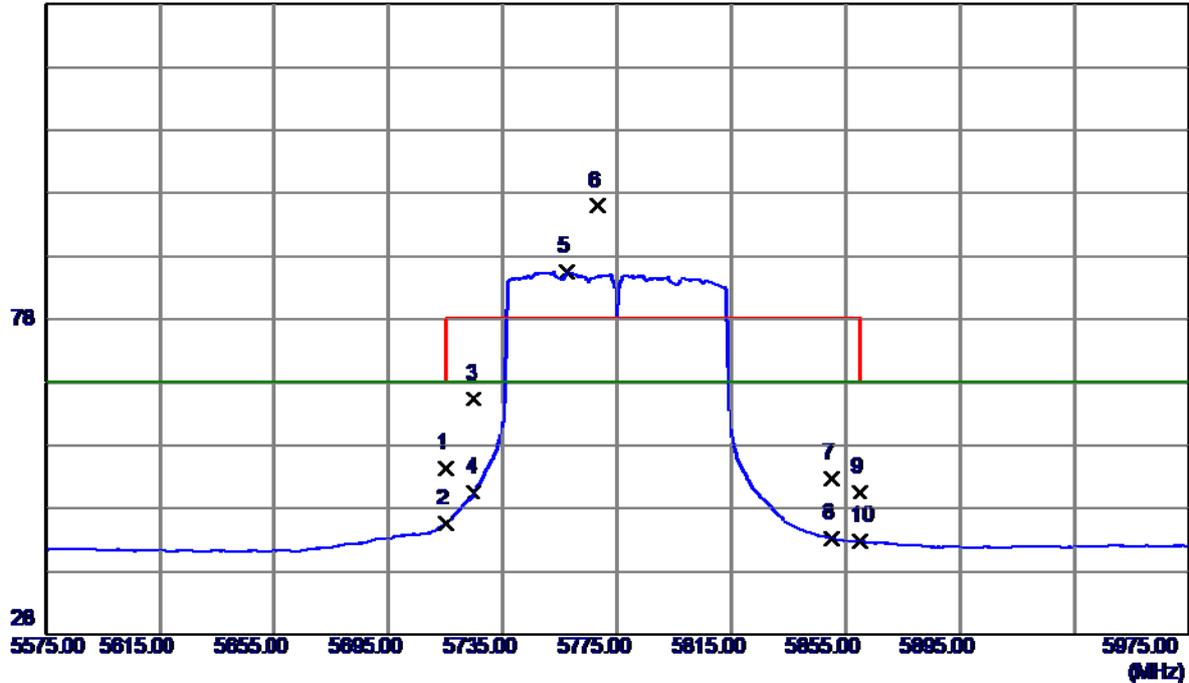

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	13.12	41.25	54.37	68.30	-13.93	Peak	
2	5715.0000	4.38	41.25	45.63	68.30	-22.67	AVG	
3	5725.0000	24.08	41.27	65.35	78.30	-12.95	Peak	
4	5725.0000	9.31	41.27	50.58	68.30	-17.72	AVG	
5	5757.4000	44.24	41.31	85.55	68.30	17.25	AVG	no limit
6	5768.2000	54.70	41.32	96.02	78.30	17.72	Peak	no limit
7	5850.0000	11.36	41.44	52.80	78.30	-25.50	Peak	
8	5850.0000	1.79	41.44	43.23	68.30	-25.07	AVG	
9	5860.0000	9.18	41.45	50.63	78.30	-27.67	Peak	
10	5860.0000	1.35	41.45	42.80	68.30	-25.50	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

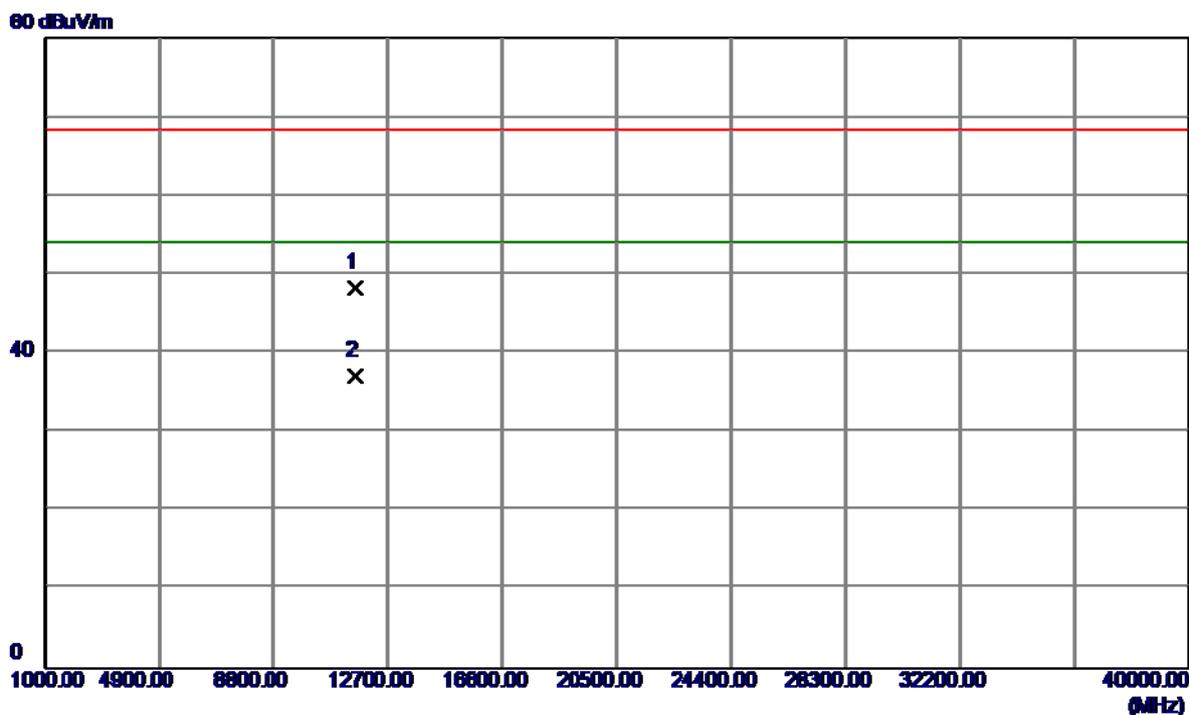


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11552.9700	31.34	17.02	48.36	68.30	-19.94	Peak	
2	11552.9700	20.15	17.02	37.17	54.00	-16.83	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal


128 dBuV/m

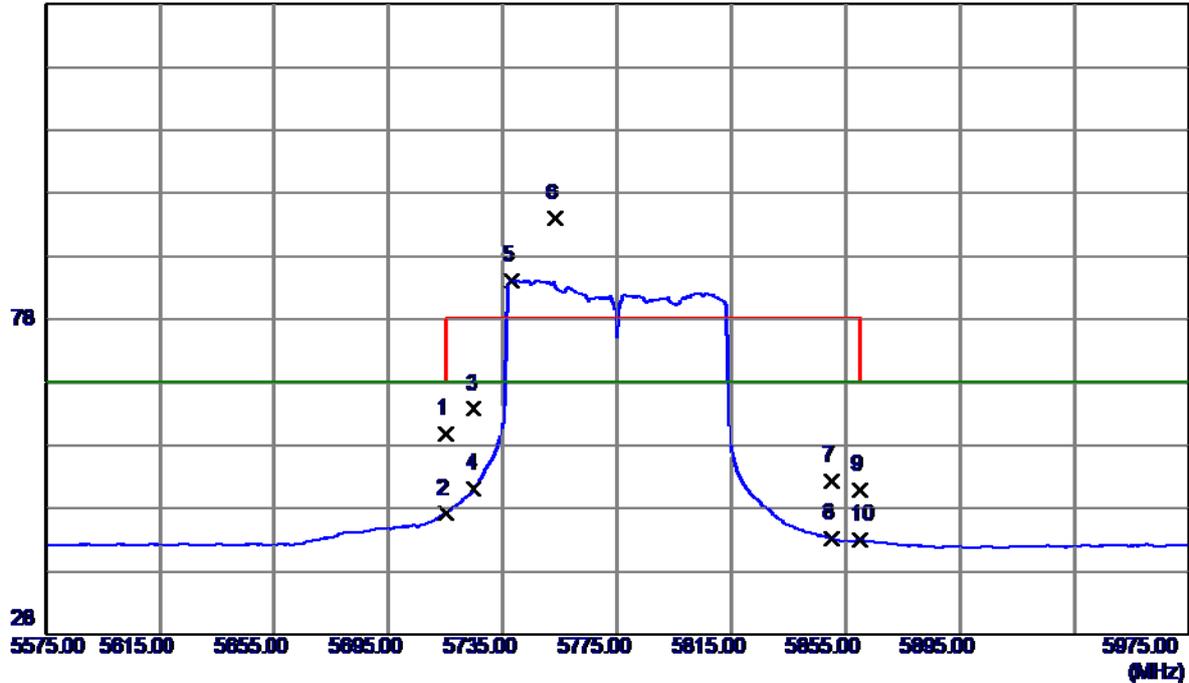

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	5715.0000	18.49	41.25	59.74	68.30	-8.56	Peak	
2	5715.0000	5.94	41.25	47.19	68.30	-21.11	AVG	
3	5725.0000	22.46	41.27	63.73	78.30	-14.57	Peak	
4	5725.0000	10.02	41.27	51.29	68.30	-17.01	AVG	
5	5738.2000	42.95	41.28	84.23	68.30	15.93	AVG	no limit
6	5753.4000	52.69	41.30	93.99	78.30	15.69	Peak	no limit
7	5850.0000	11.00	41.44	52.44	78.30	-25.86	Peak	
8	5850.0000	1.73	41.44	43.17	68.30	-25.13	AVG	
9	5860.0000	9.50	41.45	50.95	78.30	-27.35	Peak	
10	5860.0000	1.50	41.45	42.95	68.30	-25.35	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

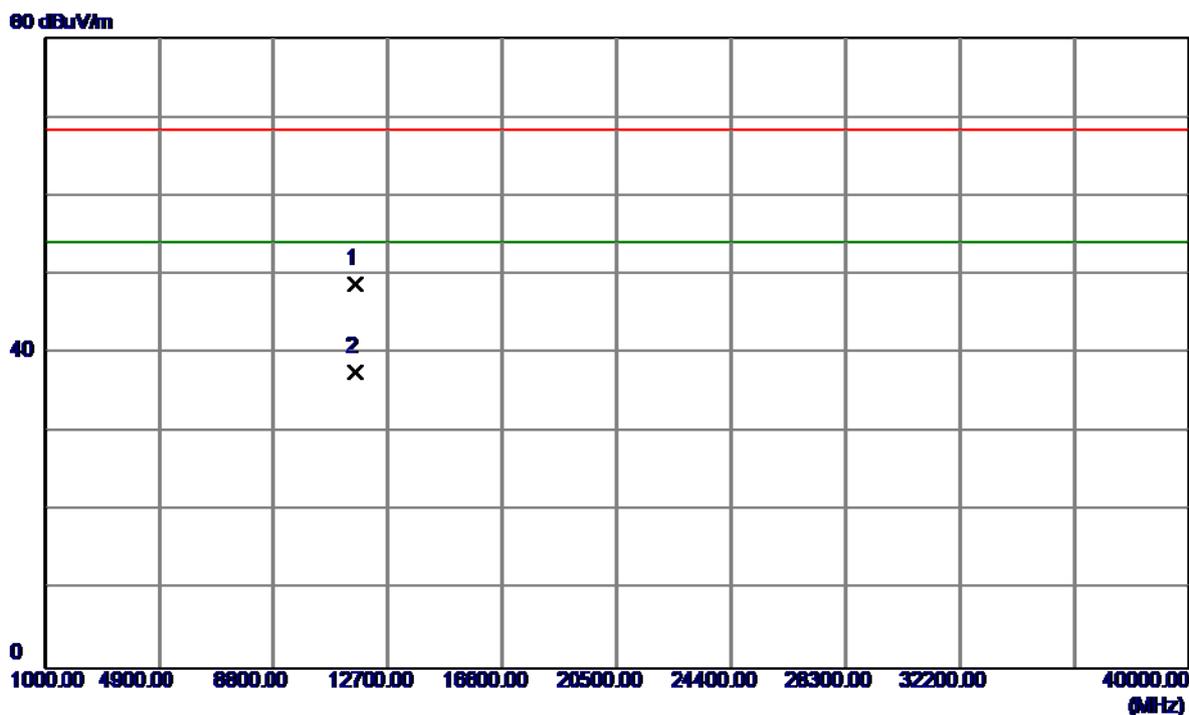

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	11551.6700	31.71	17.02	48.73	68.30	-19.57	Peak	
2	11551.6700	20.64	17.02	37.66	54.00	-16.34	AVG	

TX A Mode_DUTY CYCLE

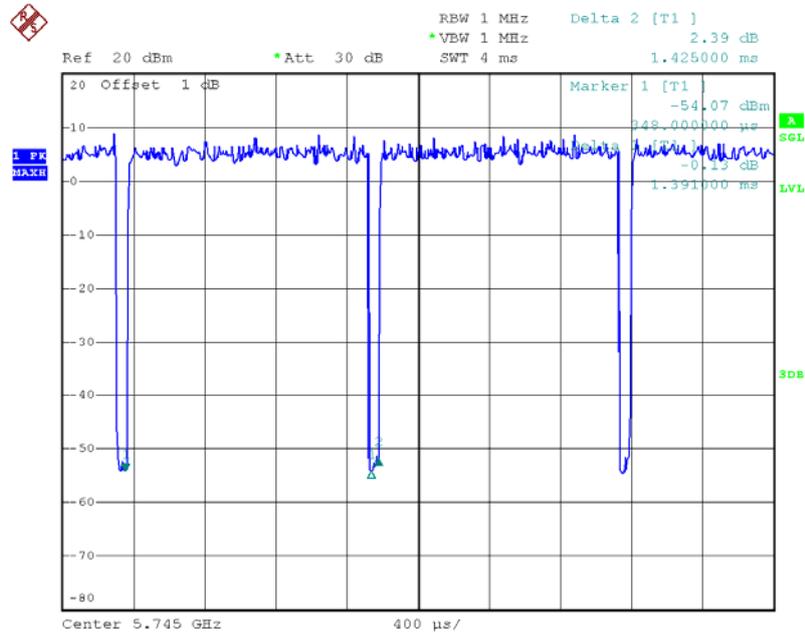

Date: 3.APR.2015 15:44:41

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :1.39msec

T_{Total} :1.42msec


Duty cycle: 97.89%

Duty Factor= 10 log(1/Duty cycle)

Duty Factor =0.09

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N20 Mode_DUTY CYCLE

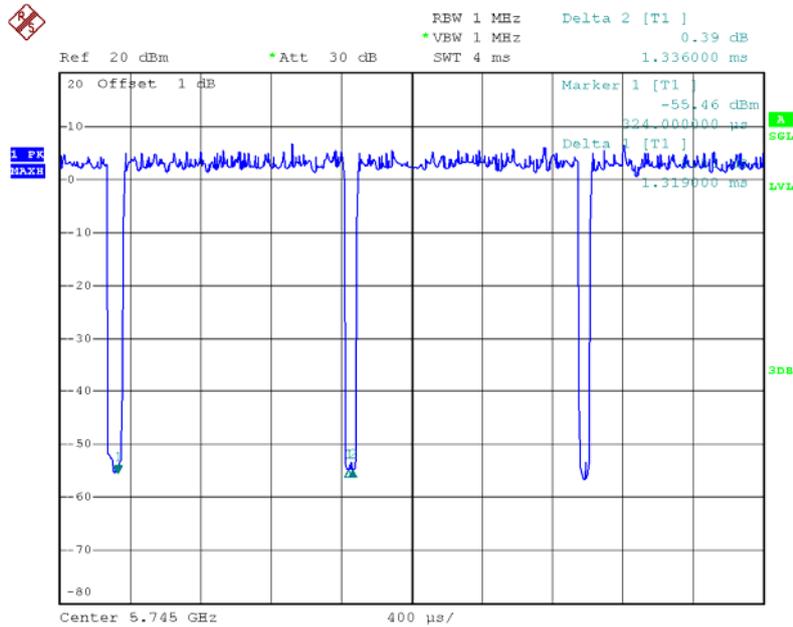

Date: 3.APR.2015 15:55:22

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :1.32msec

T_{Total} :1.34msec


Duty cycle: 98.51%

Duty Factor= $10 \log(1/\text{Duty cycle})$

Duty Factor =0.07

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 asOutput Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX N40 Mode_DUTY CYCLE

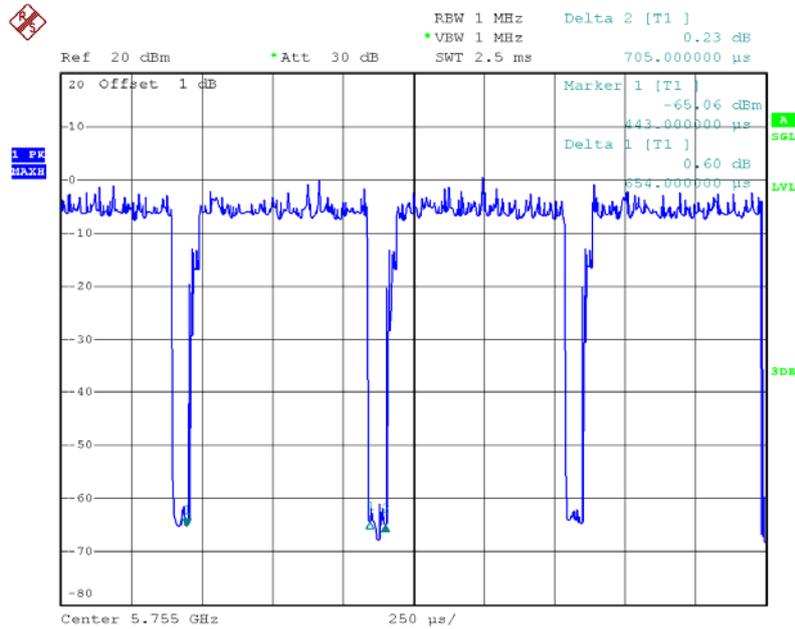

Date: 3.APR.2015 16:25:51

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :0.65msec

T_{Total} :0.70msec


Duty cycle: 92.86%

Duty Factor= $10 \log(1/\text{Duty cycle})$

Duty Factor =0.32

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC20 Mode_DUTY CYCLE

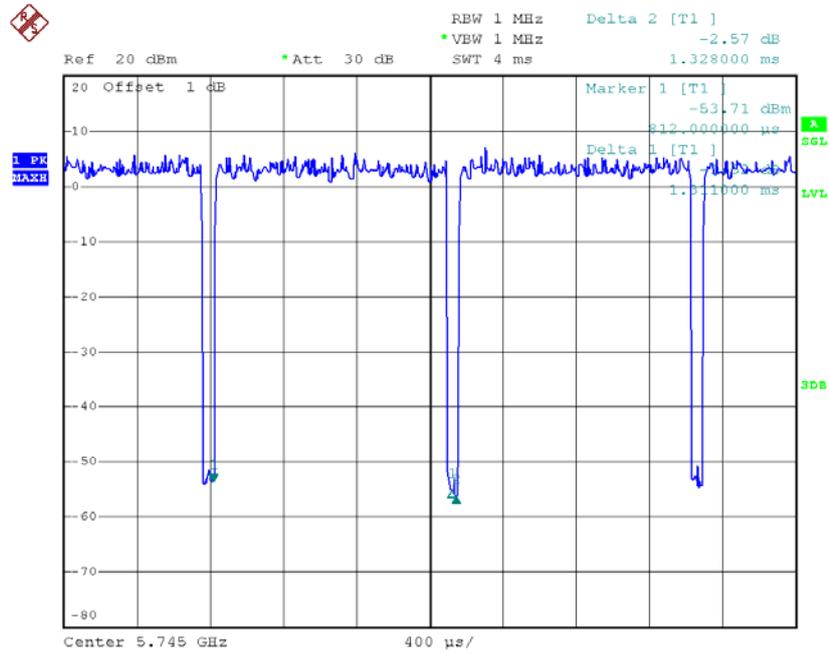

Date: 3.APR.2015 16:04:17

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :1.31msec

T_{Total} :1.33msec

Duty cycle: 98.50%

Duty Factor= $10 \log(1/\text{Duty cycle})$


Duty Factor =0.07

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated

asOutput Power = Measured power + Ducus factor

Power Spectral Density = Measured density + Duty factor

TX AC40 Mode_DUTY CYCLE

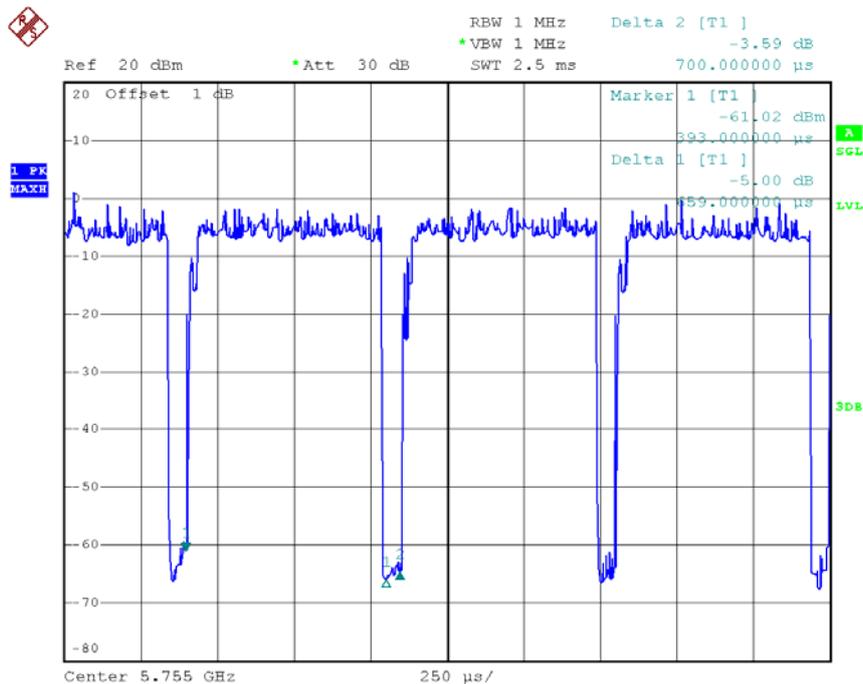

Date: 3.APR.2015 16:33:04

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :0.66msec

T_{Total} :0.70msec


Duty cycle: 94.29%

Duty Factor= 10 log(1/Duty cycle)

Duty Factor =0.26

Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

TX AC80 Mode_DUTY CYCLE

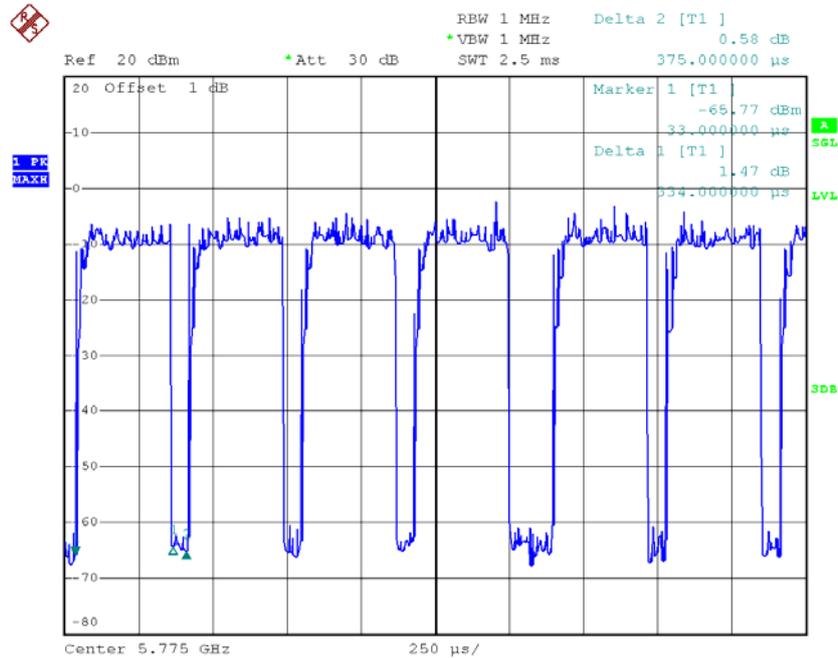

Date: 3.APR.2015 16:44:33

Duty cycle: TX DUTYMHZ

$$\text{Duty cycle} = T_{\text{ON}} / T_{\text{Total}}$$

T_{ON} :0.33msec

T_{Total} :0.38msec

Duty cycle: 86.84%

Duty Factor= 10 log(1/Duty cycle)

Duty Factor =0.61


Note: The EUT was programmed to be in countinously transmitting mode and the transmit duty cycle is not less than 98 %, so, the output power and power density should be cacluated as
 Output Power = Measured power + Ducus factor
 Power Spectral Density = Measured density + Duty factor

ATTACHMENTE -BANDWIDTH

Test Mode: UNII-1/TX A Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.40	17.00
CH40	5200	22.25	17.00
CH48	5240	22.25	17.00

TX CH36

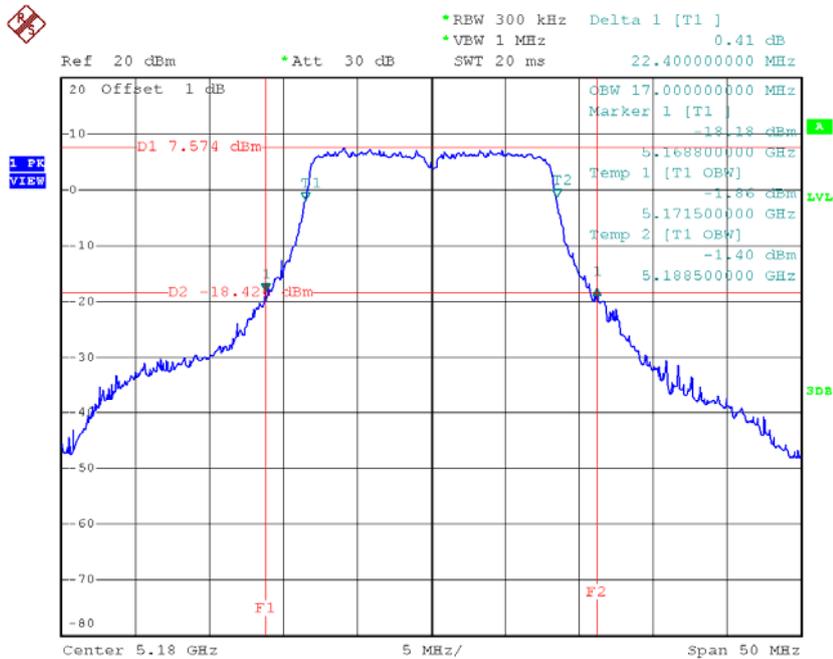


Date: 3.APR.2015 15:33:16

TX CH40

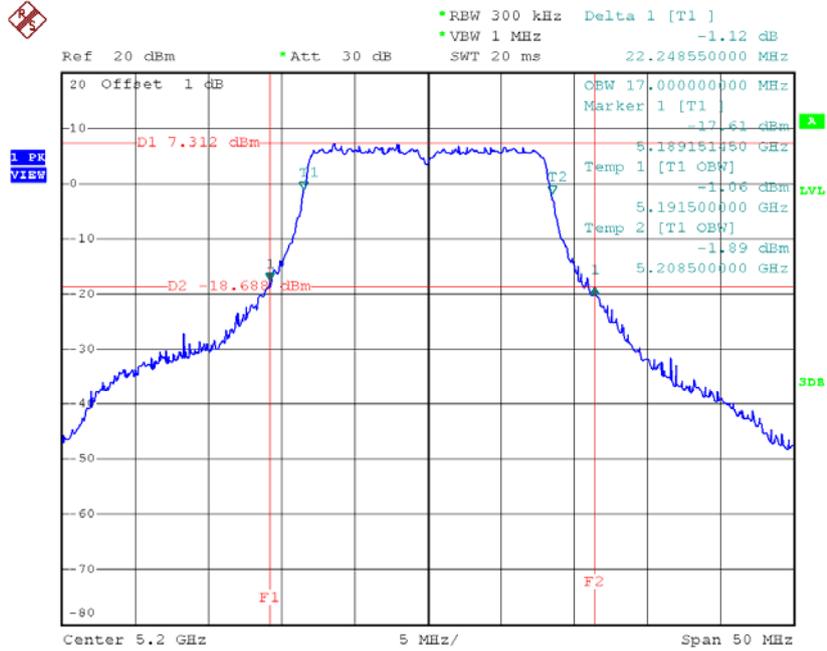

Date: 3.APR.2015 15:35:35

TX CH48

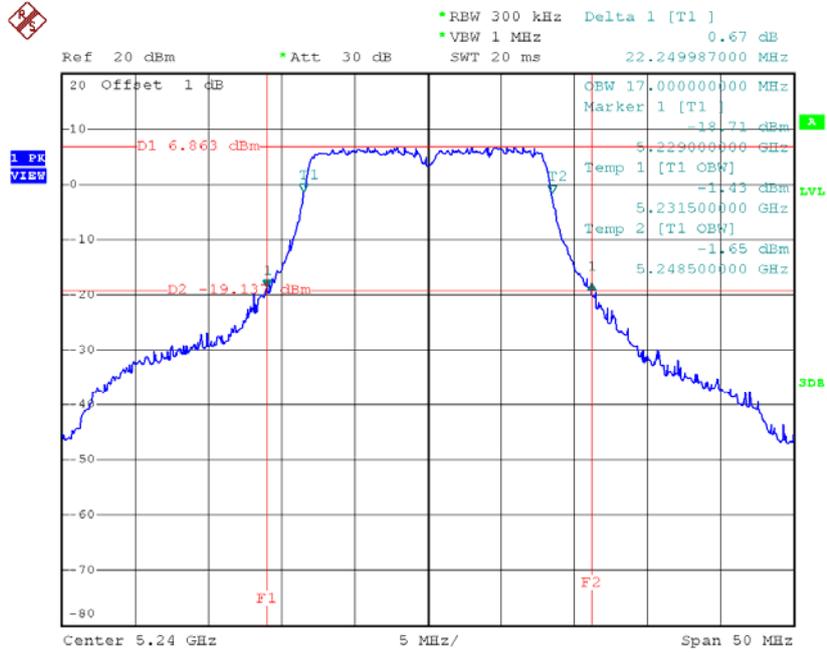


Date: 3.APR.2015 15:36:26

Test Mode: UNII-1/TXN20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.95	18.00
CH40	5200	23.00	18.00
CH48	5240	23.15	18.00

TX CH36

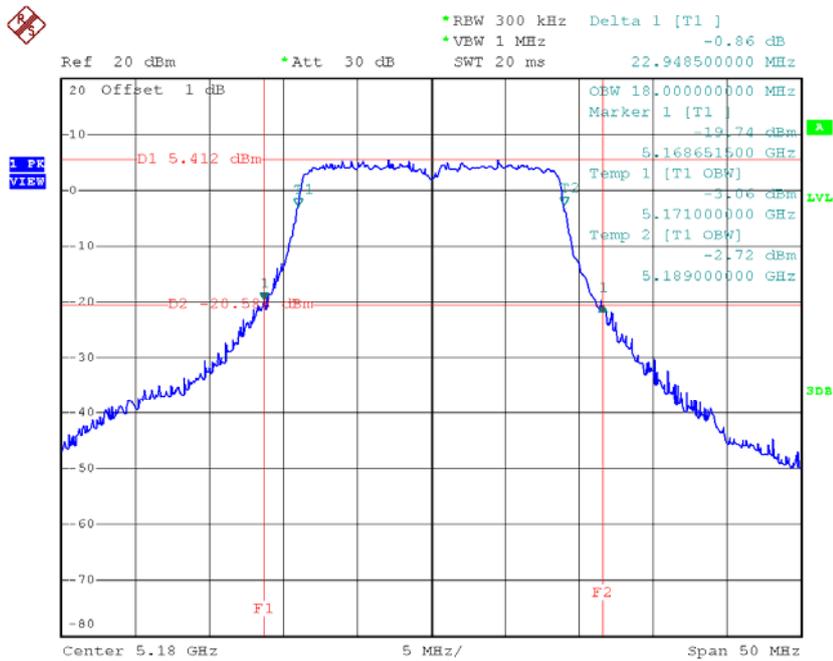


Date: 3.APR.2015 15:47:45

TX CH40

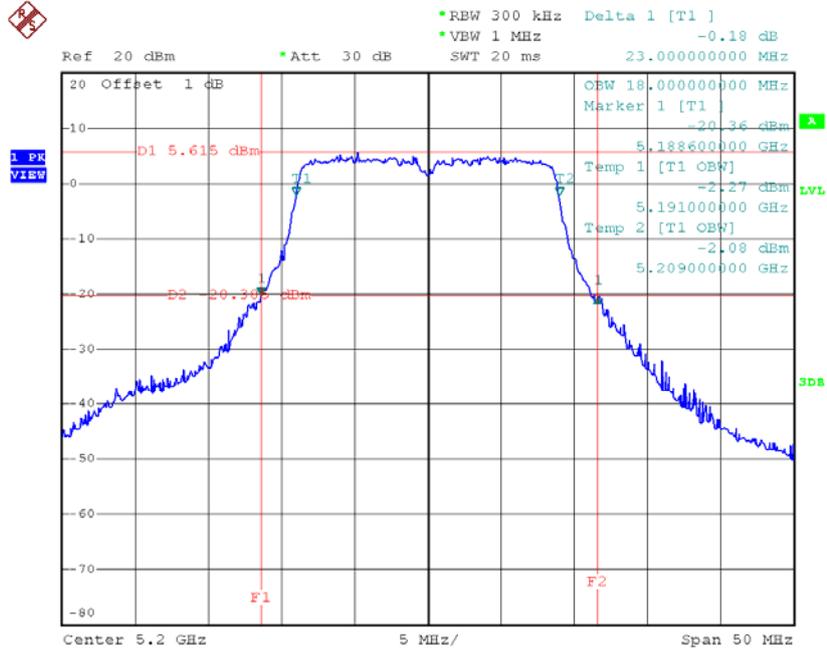

Date: 3.APR.2015 15:48:56

TX CH48

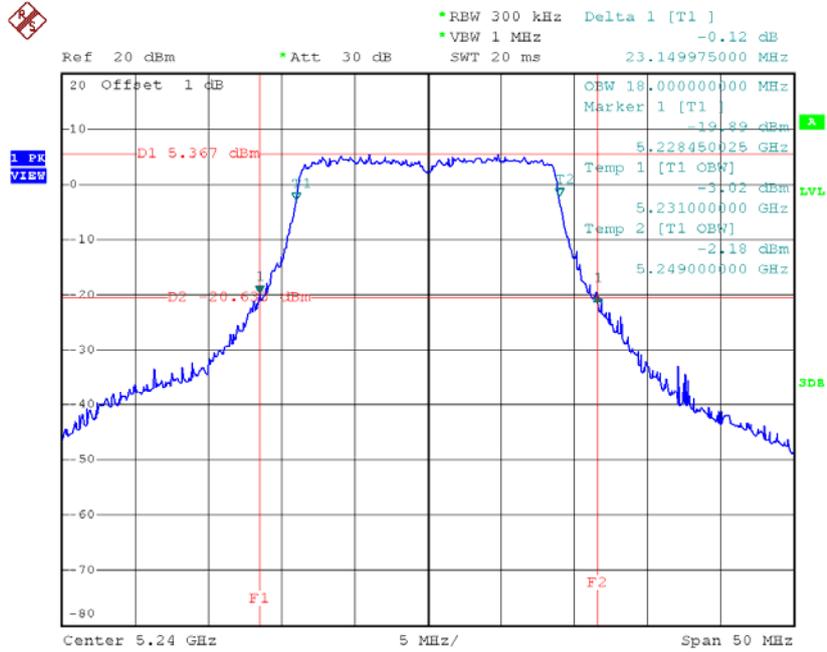


Date: 3.APR.2015 15:49:40

Test Mode: UNII-1/TX N40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	43.70	36.40
CH46	5230	43.80	36.40

TX CH38

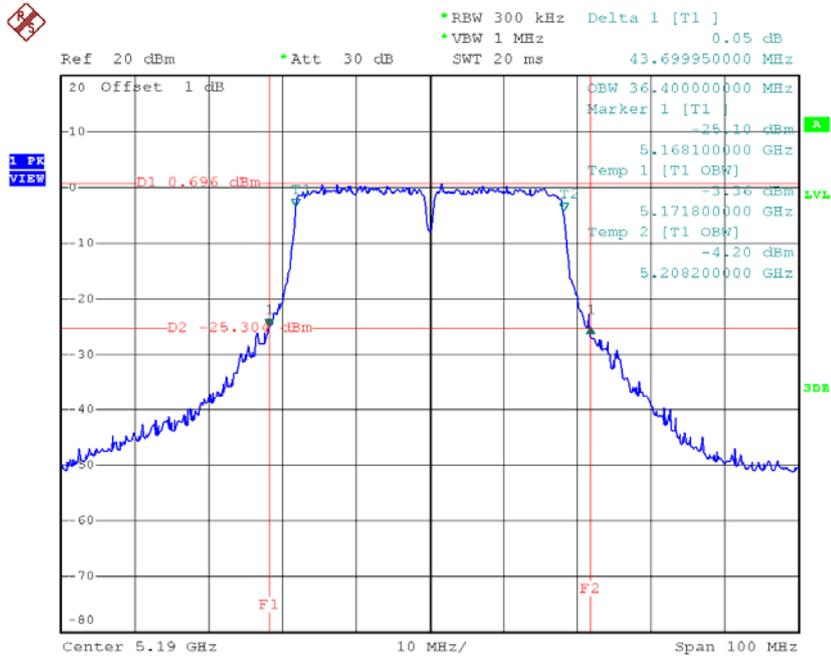

Date: 3.APR.2015 16:06:10

TX CH46

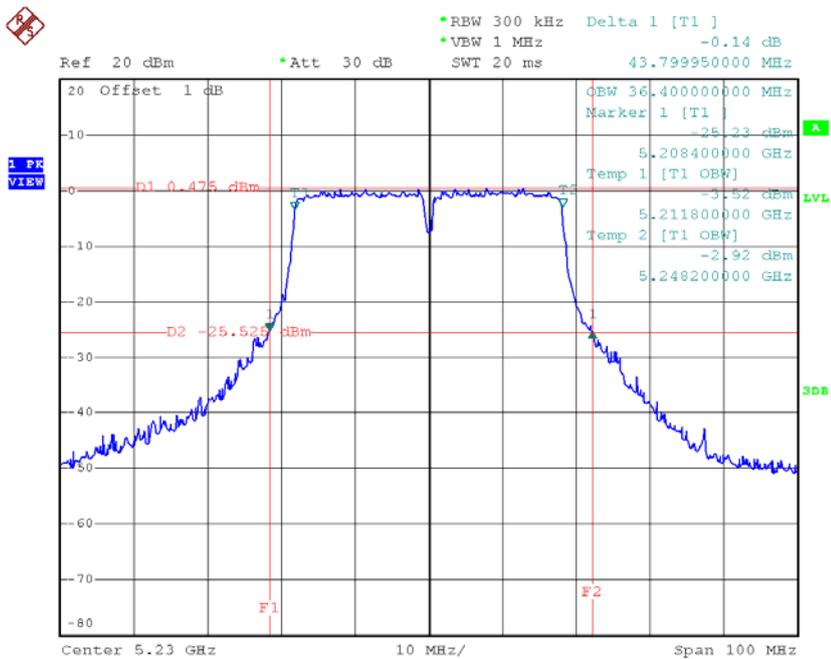


Date: 3.APR.2015 16:07:14

Test Mode: UNII-2A/TX A Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	22.50	16.90
CH60	5300	22.75	17.00
CH64	5320	21.99	17.00

TX CH52

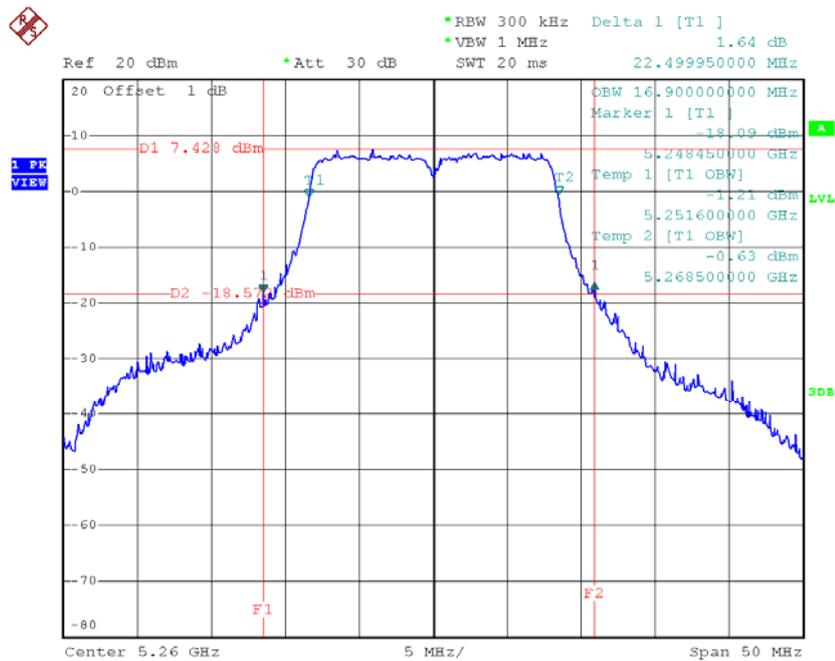


Date: 3.APR.2015 15:37:26

TX CH60

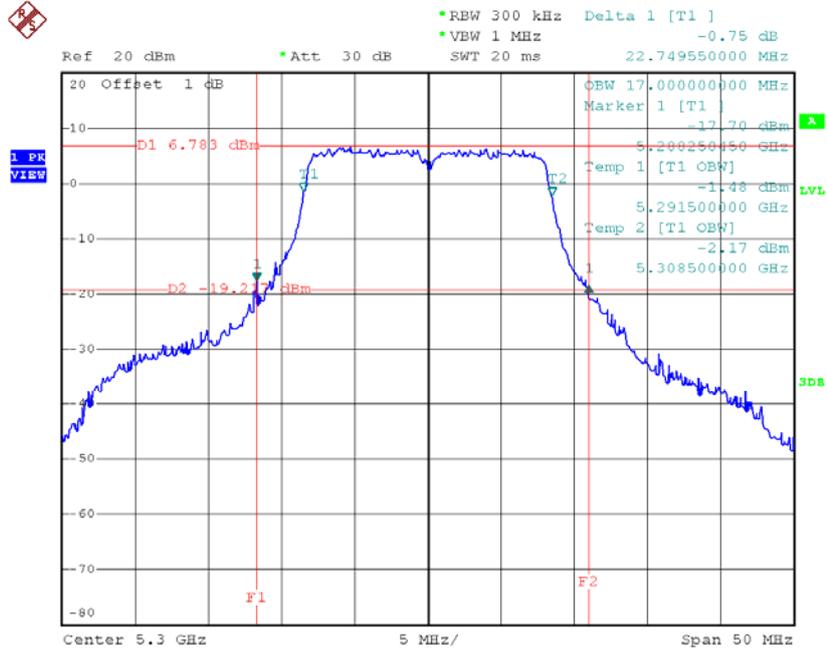

Date: 3.APR.2015 15:39:03

TX CH64

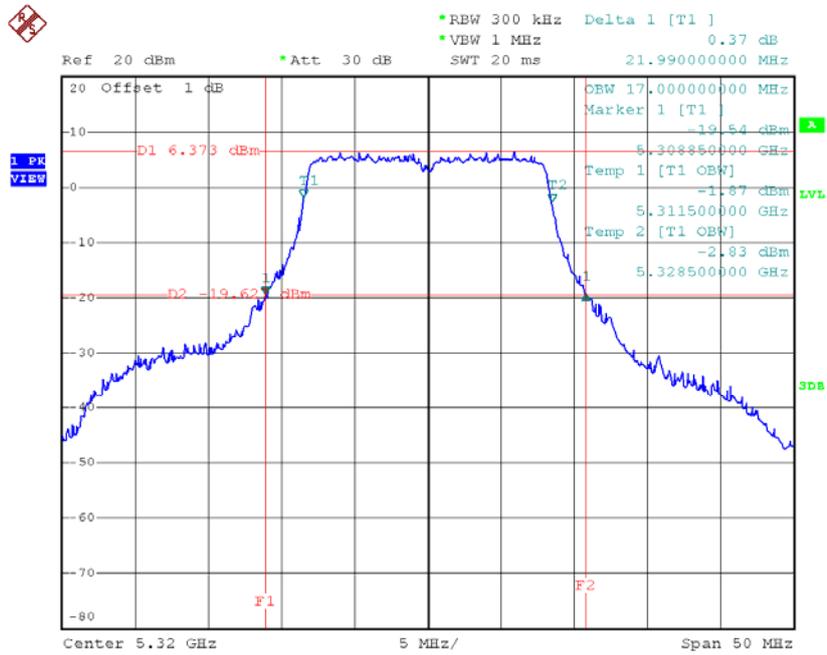


Date: 3.APR.2015 15:39:56

Test Mode: UNII-2A/TX N20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	23.10	18.00
CH60	5300	23.00	18.00
CH64	5320	23.45	18.00

TX CH52

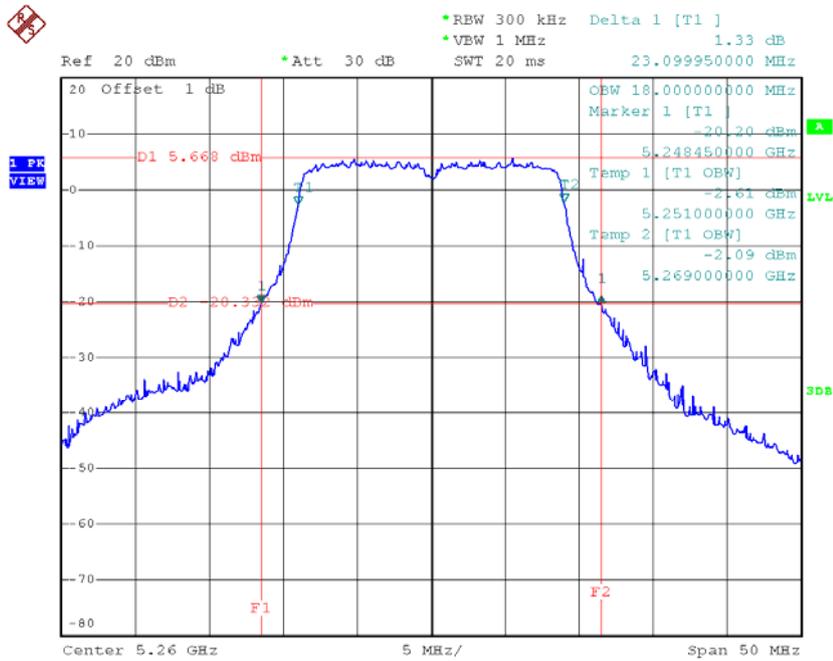


Date: 3.APR.2015 15:50:34

TX CH60

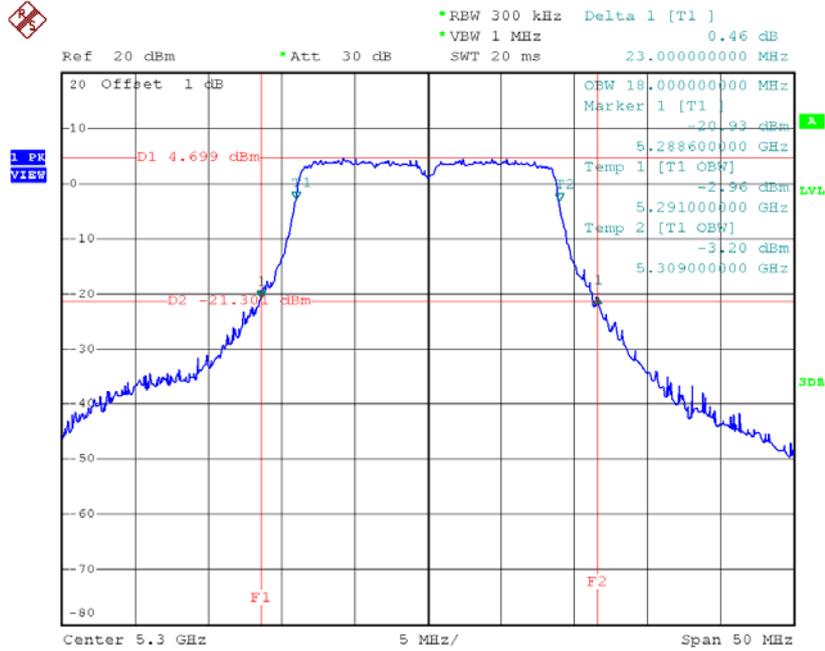

Date: 3.APR.2015 15:51:29

TX CH64

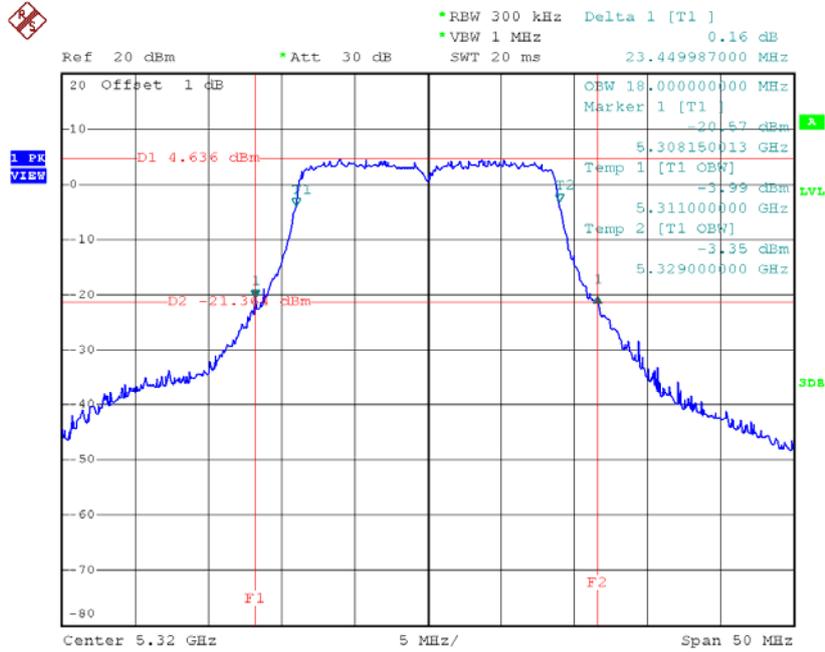


Date: 3.APR.2015 15:52:00

Test Mode: UNII-2A/TX N40 Mode_CH54/CH62


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	44.20	36.40
CH62	5310	43.79	36.40

TX CH54

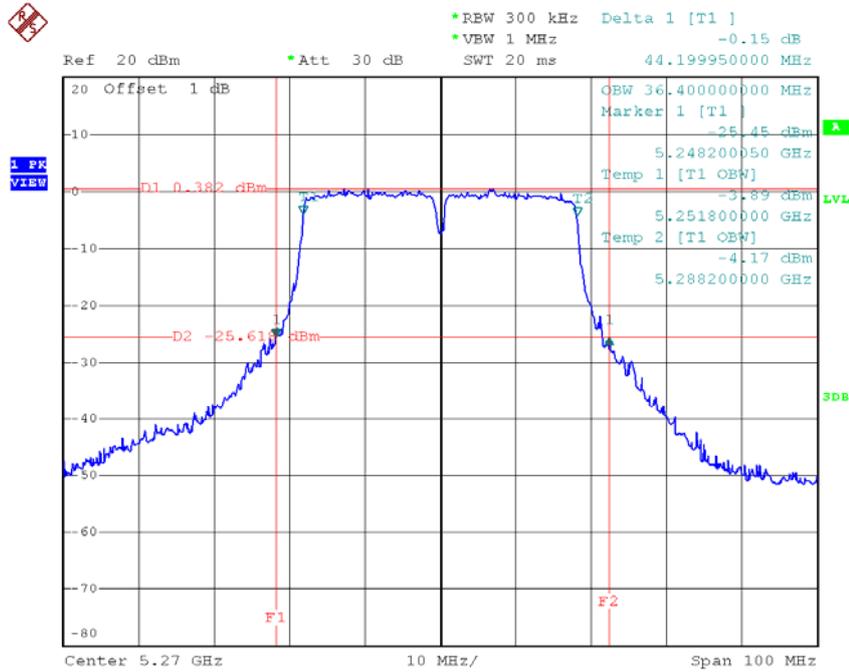

Date: 3.APR.2015 16:07:54

TX CH62

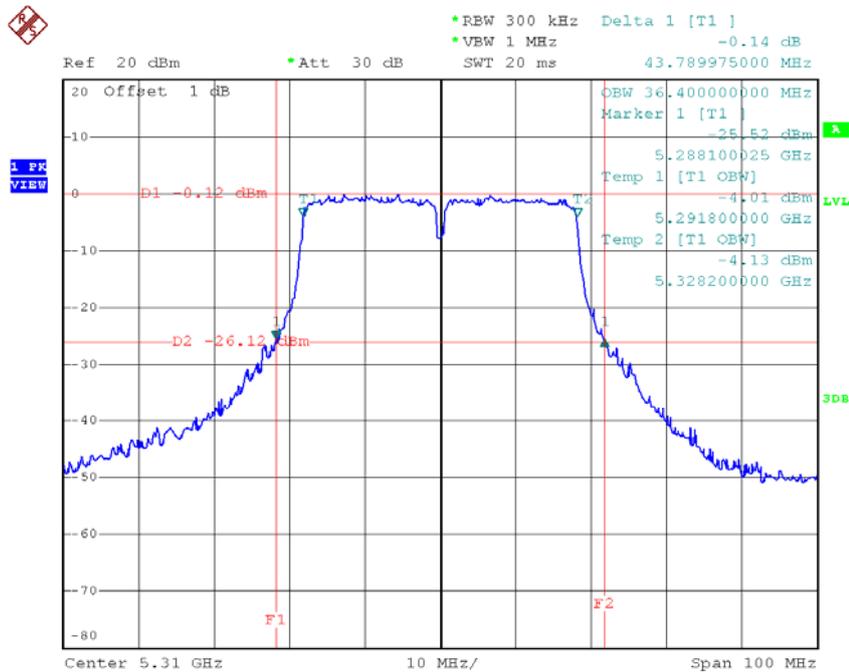


Date: 3.APR.2015 16:08:59

Test Mode: UNII-2C/TX A Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	22.45	16.80
CH116	5580	22.20	17.00
CH140	5700	22.20	16.90

TX CH100

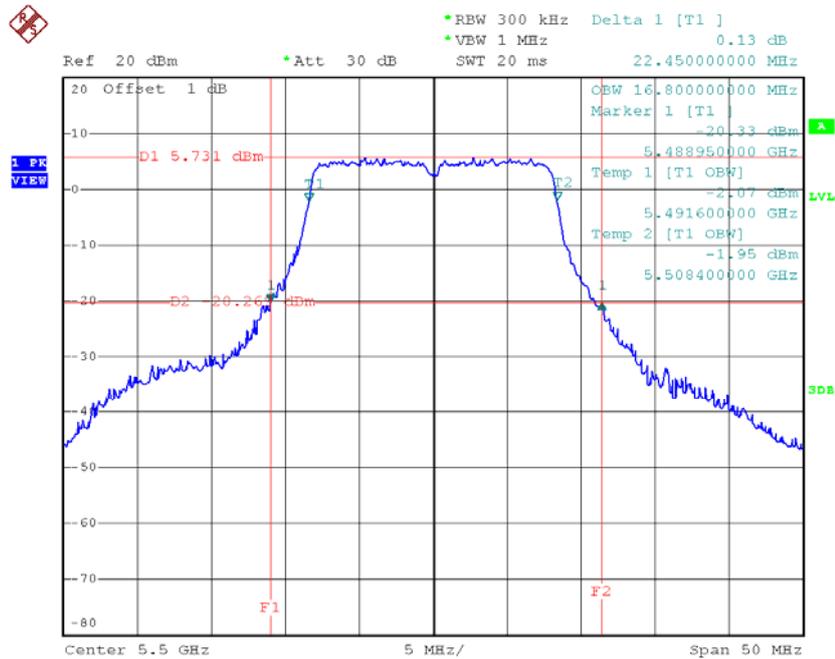


Date: 3.APR.2015 15:40:53

TX CH116

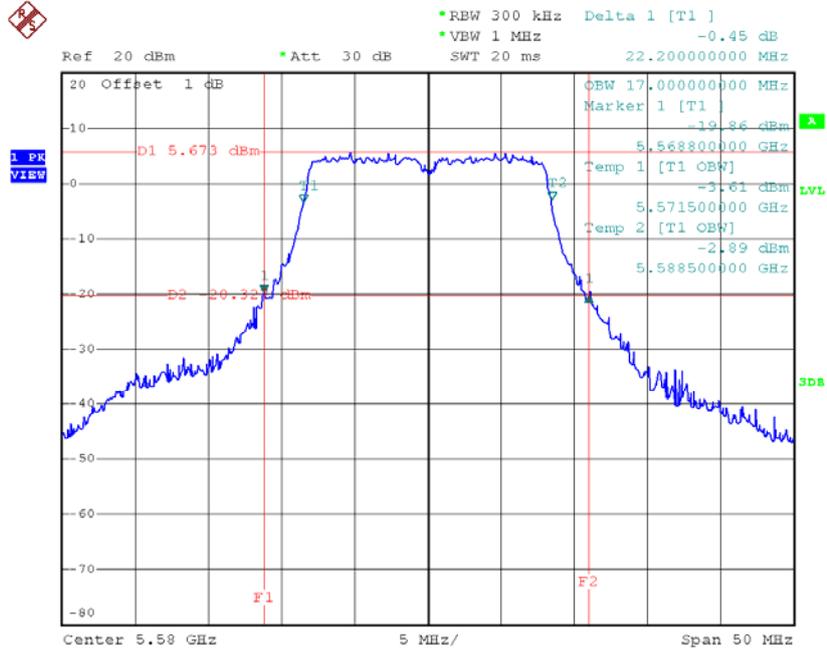


Date: 3.APR.2015 15:42:16

TX CH140

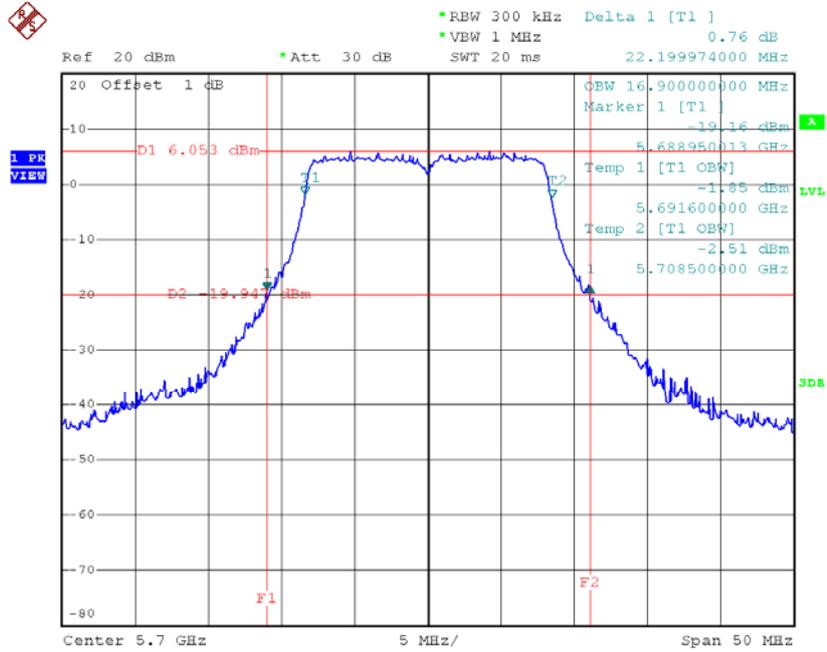


Date: 3.APR.2015 15:43:08

TX CH116

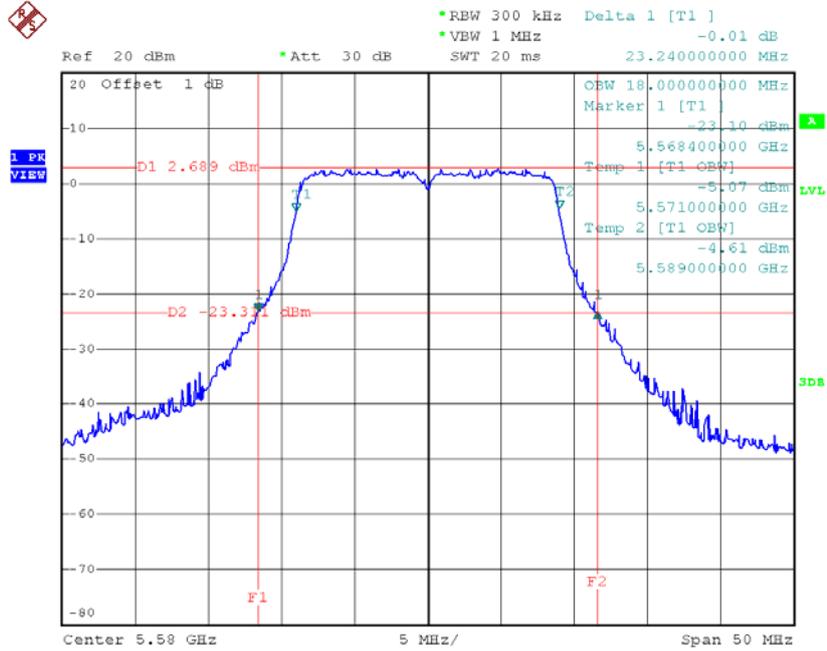

Date: 3.APR.2015 15:53:37

TX CH140

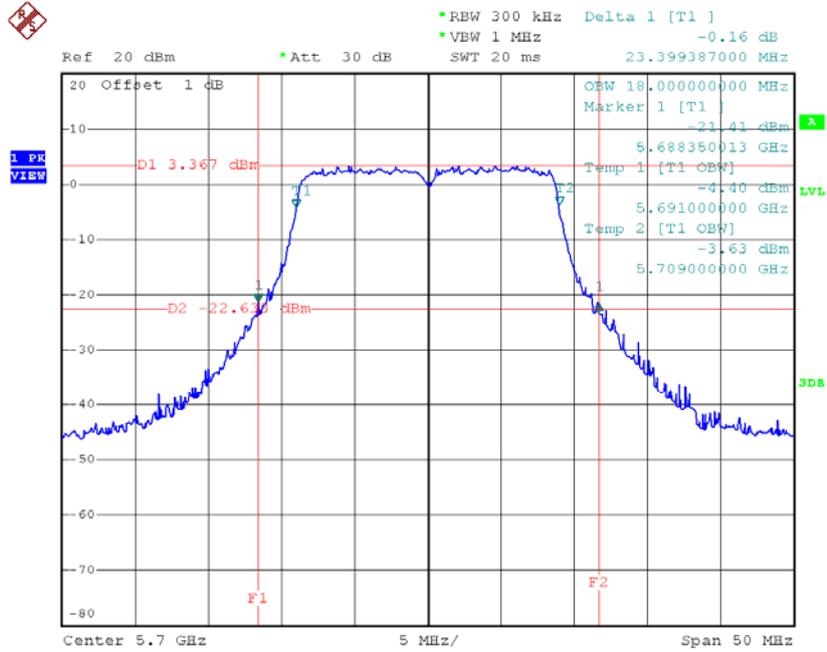


Date: 3.APR.2015 15:54:09

Test Mode: UNII-2C/TX N40 Mode_CH102/CH110/CH134

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	43.39	36.40
CH110	5550	43.60	36.40
CH134	5670	44.10	36.40

TX CH102

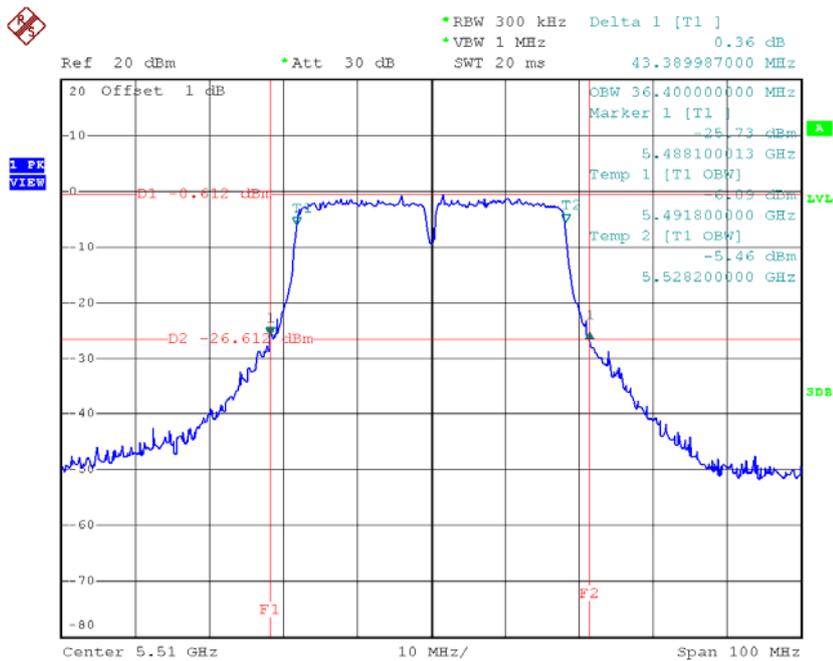


Date: 3.APR.2015 16:09:38

Test Mode: UNII-3/ TX A Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	16.65	17.00	>=500
CH157	5785	16.45	16.90	>=500
CH165	5825	16.60	16.90	>=500

TX CH 149

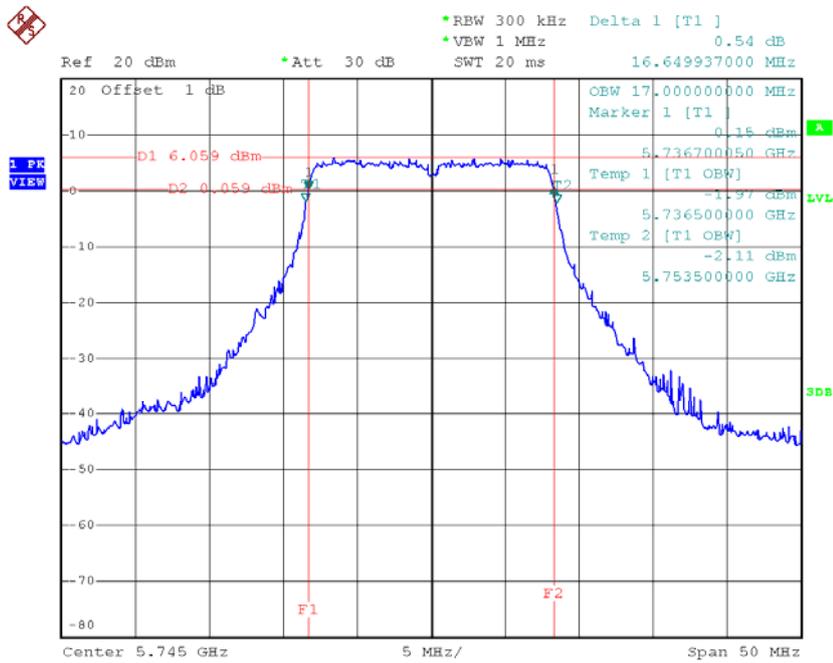


Date: 3.APR.2015 15:44:07

TX CH 157

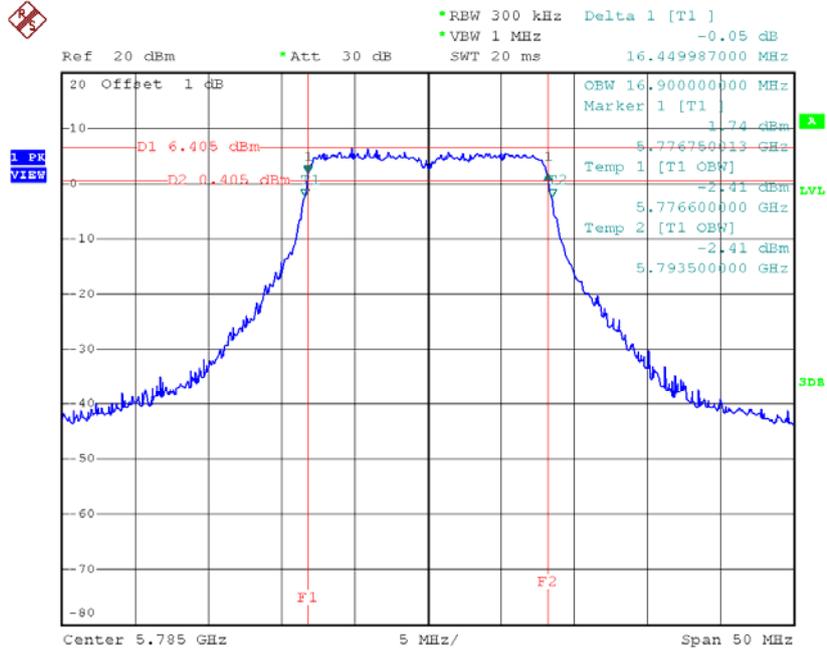

Date: 3.APR.2015 15:45:27

TX CH 165

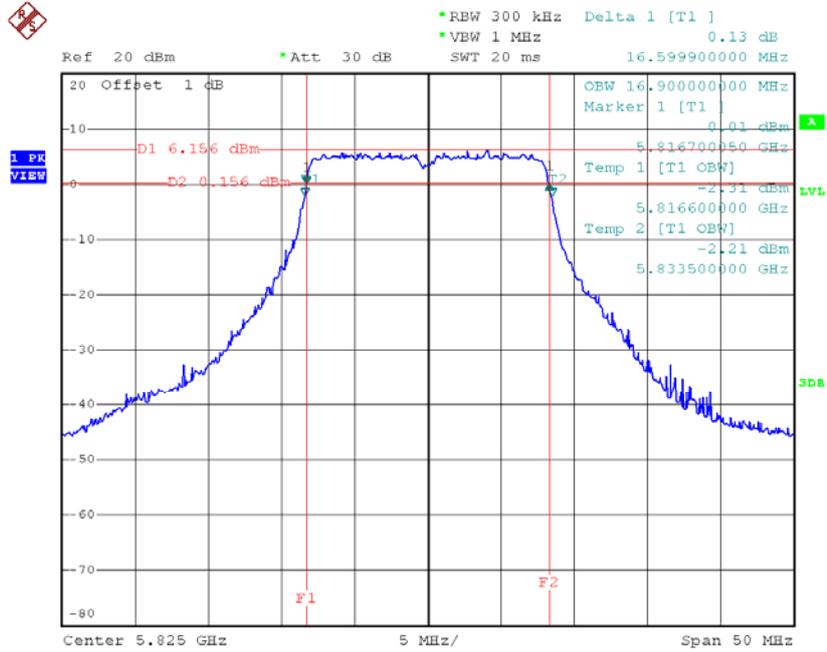


Date: 3.APR.2015 15:46:30

Test Mode: UNII-3/ TX N20 Mode_CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.65	18.00	>=500
CH157	5785	17.80	18.00	>=500
CH165	5825	17.80	18.00	>=500

TX CH 149

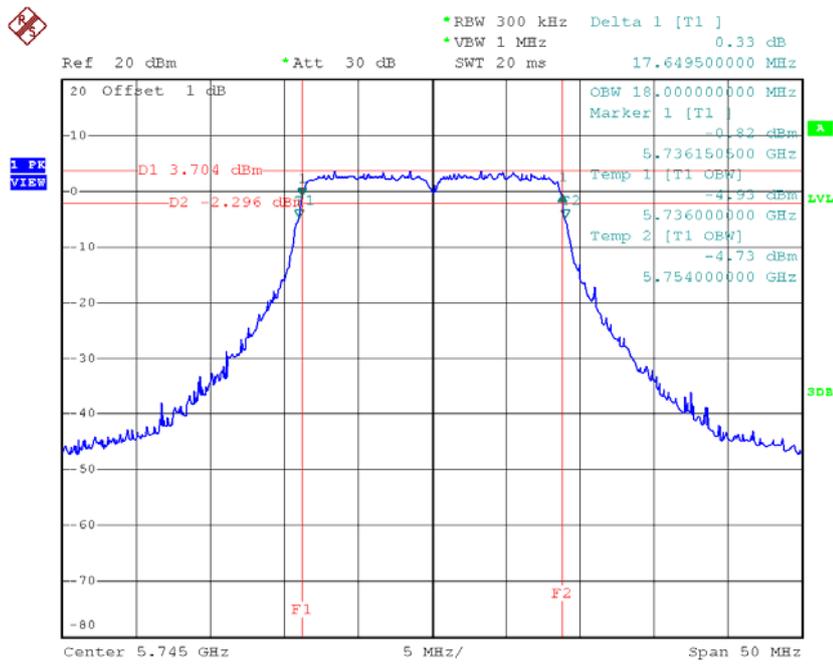


Date: 3.APR.2015 15:54:48

TX CH 157

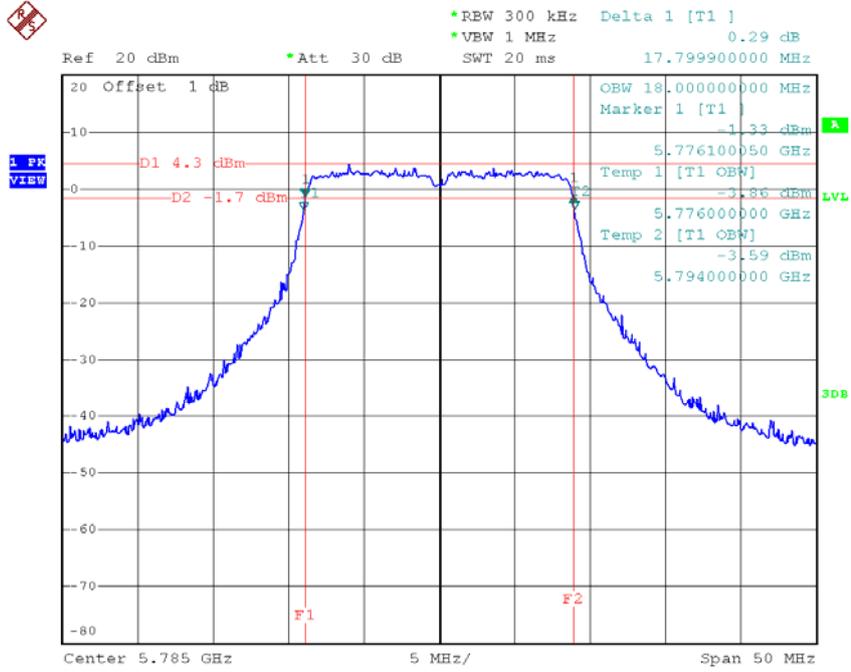

Date: 3.APR.2015 15:55:48

TX CH 165

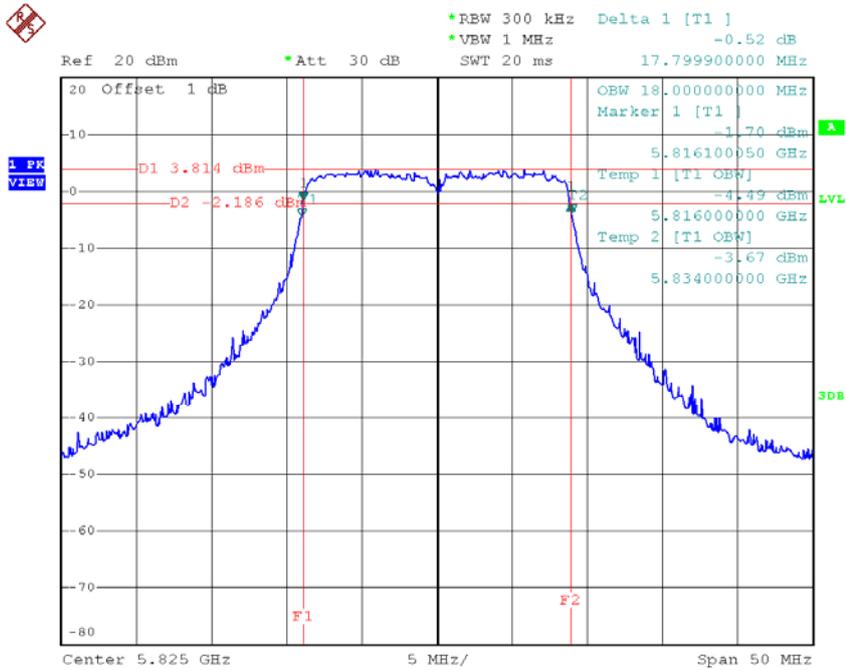


Date: 3.APR.2015 15:56:21

Test Mode: UNII-3/ TX N40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.59	36.40	>=500
CH159	5795	36.60	36.40	>=500

TX CH 151

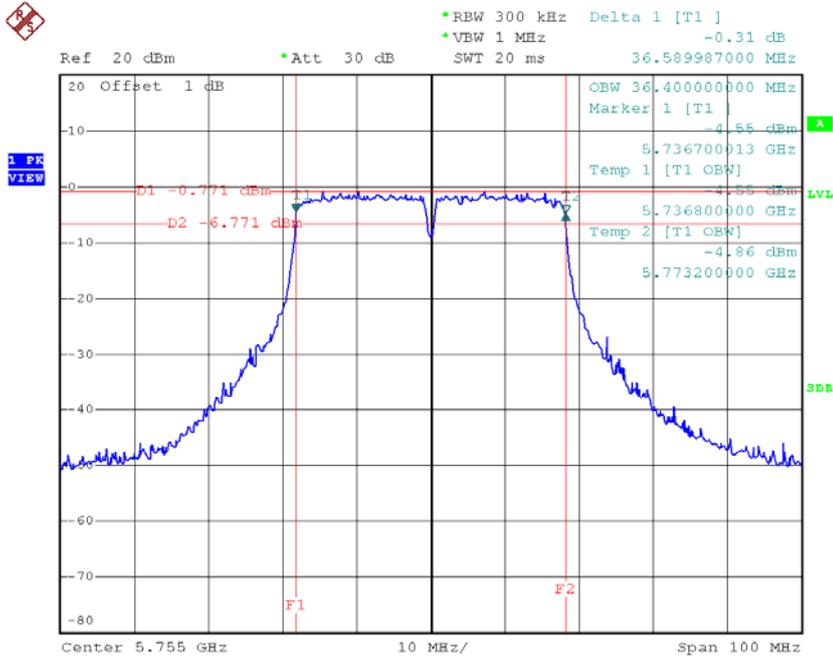

Date: 3.APR.2015 16:25:25

TX CH 159

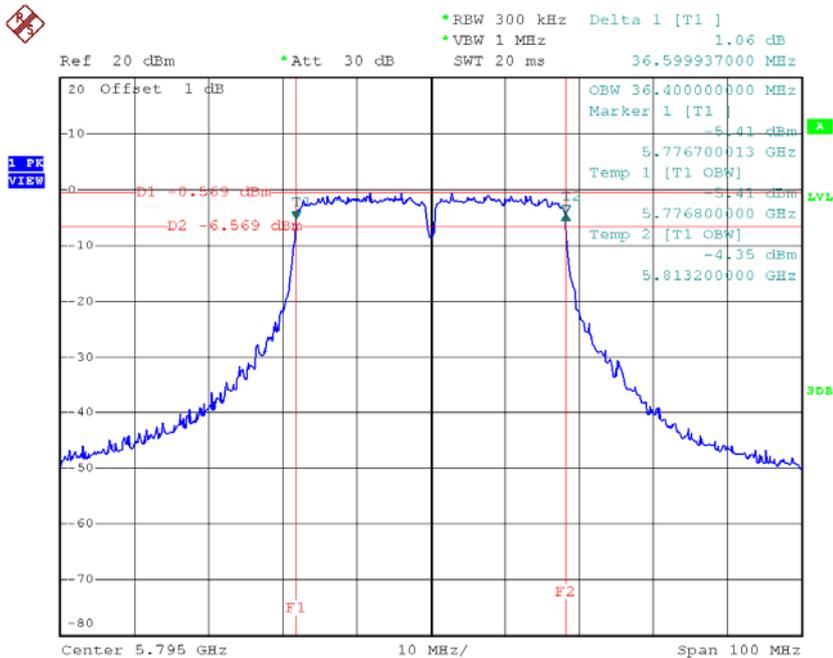


Date: 3.APR.2015 16:26:16

Test Mode: UNII-1/TX AC20 Mode_CH36/CH40/CH48


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	22.84	18.00
CH40	5200	23.10	18.00
CH48	5240	23.15	18.00

TX CH36

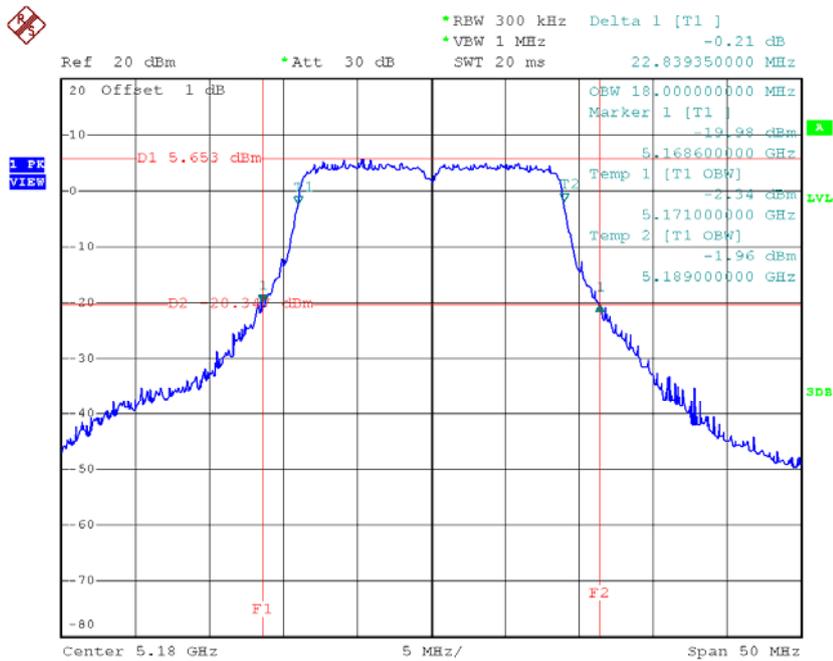


Date: 3.APR.2015 15:57:20

TX CH40

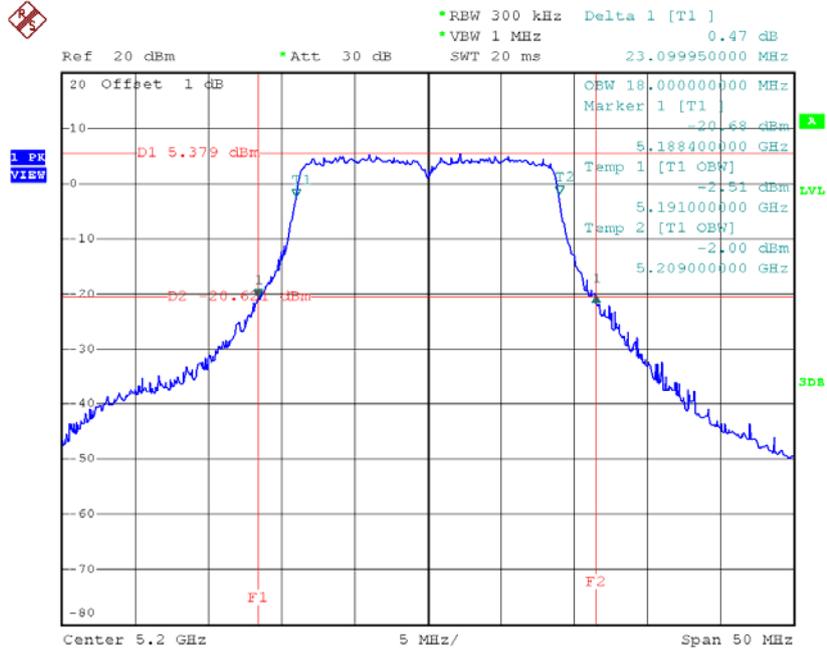

Date: 3.APR.2015 15:58:25

TX CH48

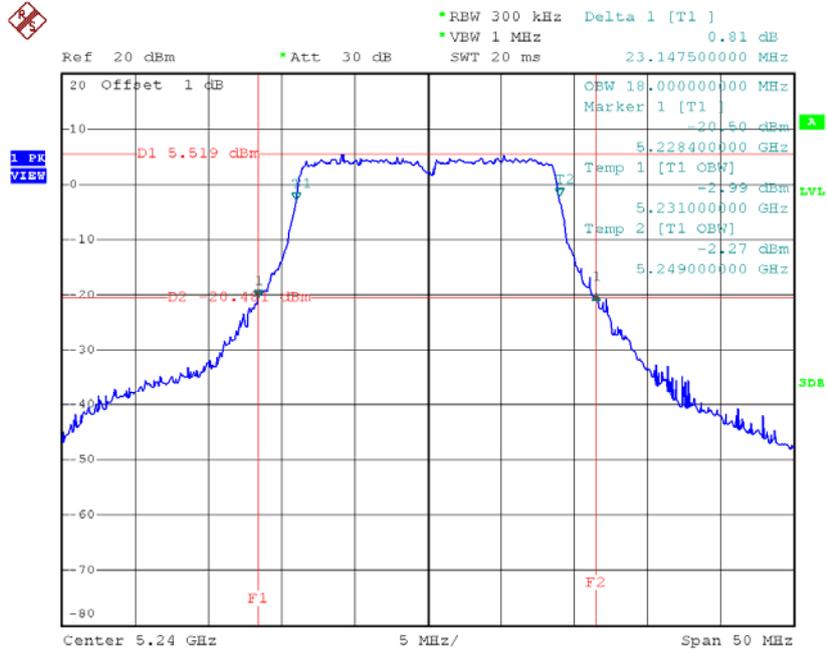


Date: 3.APR.2015 15:58:59

Test Mode: UNII-1/TX AC40 Mode_CH38/CH46


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	43.59	36.40
CH46	5230	43.62	36.40

TX CH38

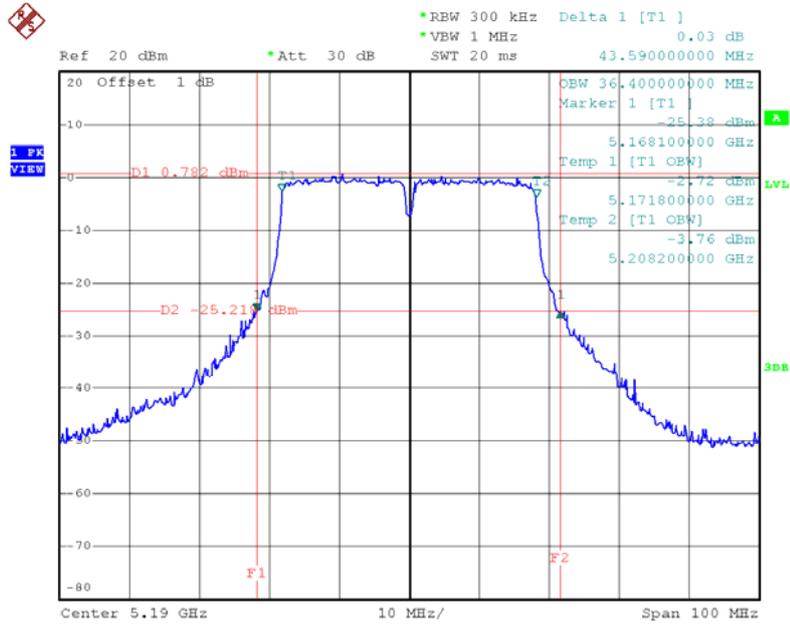

Date: 3.APR.2015 16:27:36

TX CH46

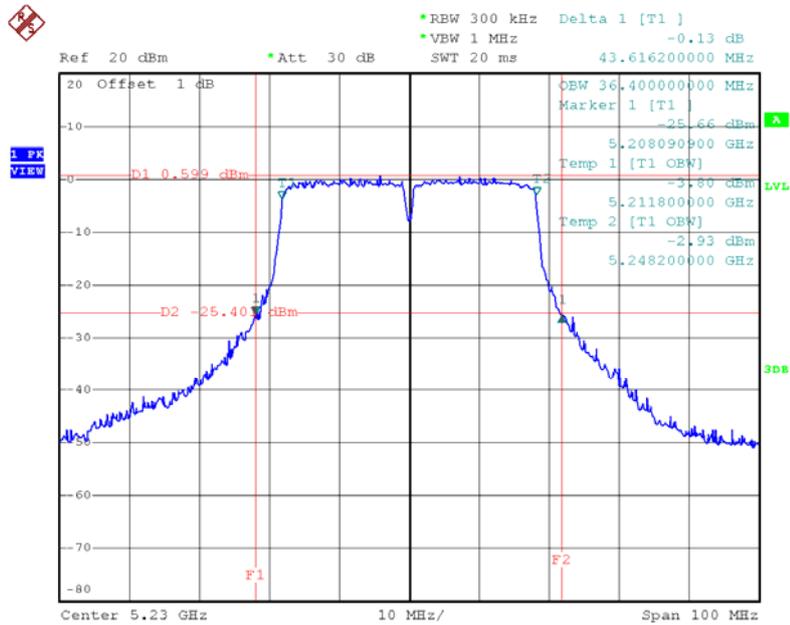


Date: 3.APR.2015 16:28:30

Test Mode: UNII-1/TX AC80 Mode_CH42

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH42	5210	85.00	76.00

TX CH42

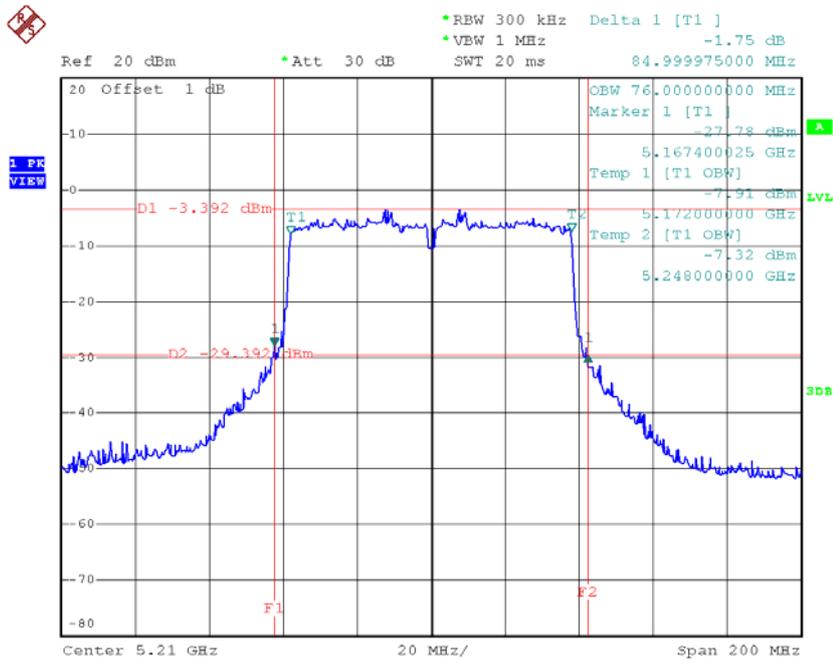


Date: 3.APR.2015 16:34:45

Test Mode: UNII-2A/TX AC20 Mode_CH52/CH60/CH64


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	23.15	18.00
CH60	5300	23.15	18.10
CH64	5320	22.99	18.00

TX CH52

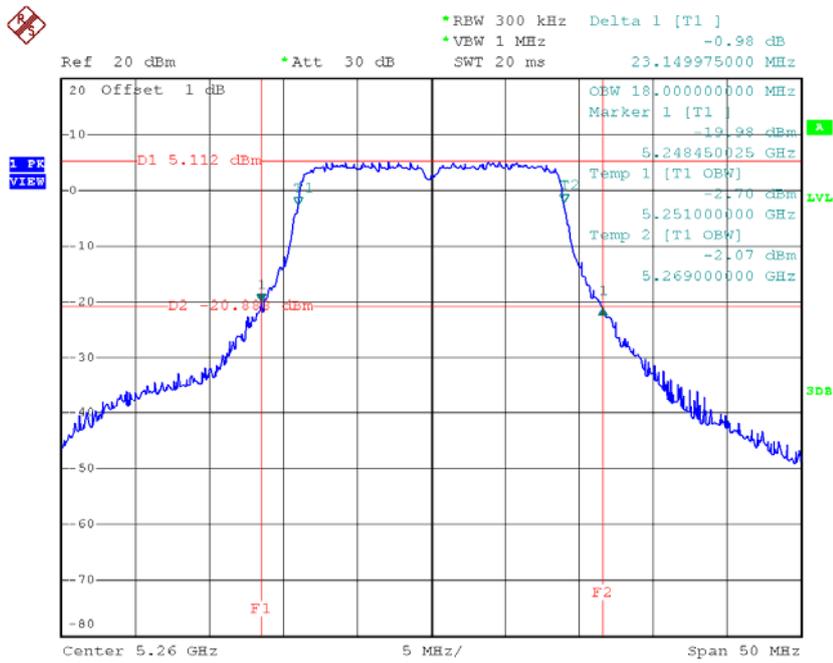


Date: 3.APR.2015 15:59:37

TX CH60

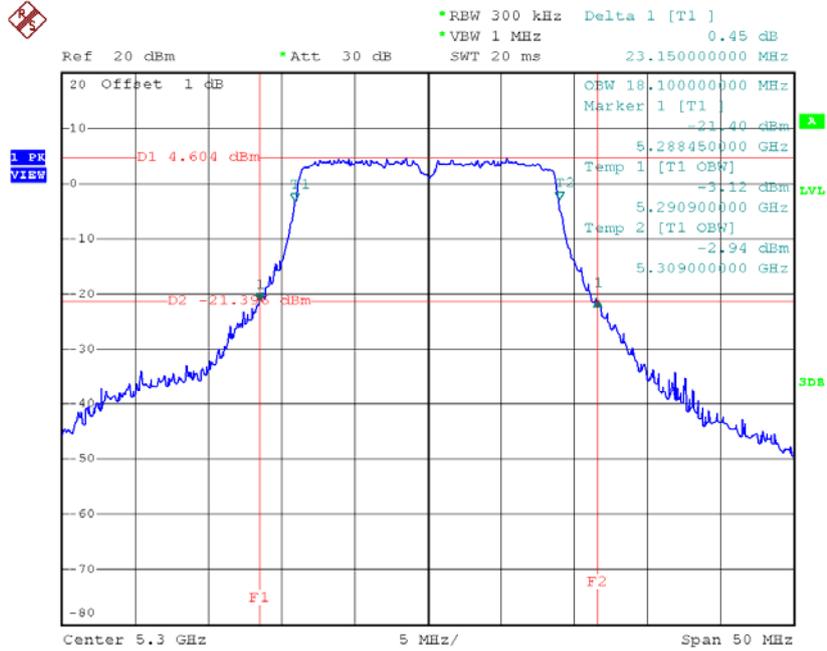

Date: 3.APR.2015 16:00:31

TX CH64

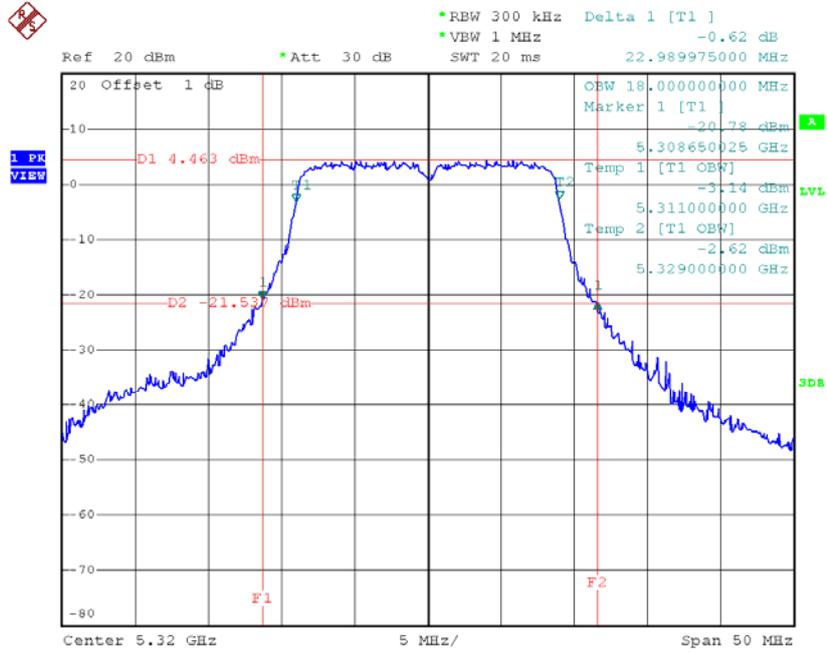

Date: 3.APR.2015 16:01:03


Test Mode: UNII-2A/TX AC40 Mode_CH54/CH62

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	43.49	36.40
CH62	5310	43.60	36.40

Test Mode: UNII-2A/TX AC80 Mode_CH58

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH58	5290	84.20	76.00

TX CH58

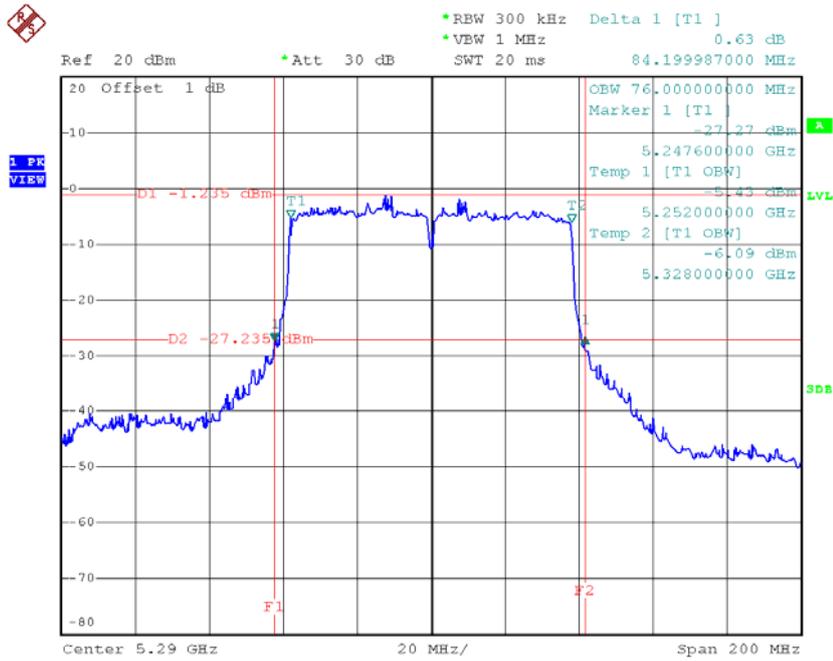


Date: 3.APR.2015 16:35:55

Test Mode: UNII-2C/TX AC20 Mode_CH100/CH116/CH140


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	23.05	18.00
CH116	5580	23.18	18.00
CH140	5700	22.54	18.00

TX CH100

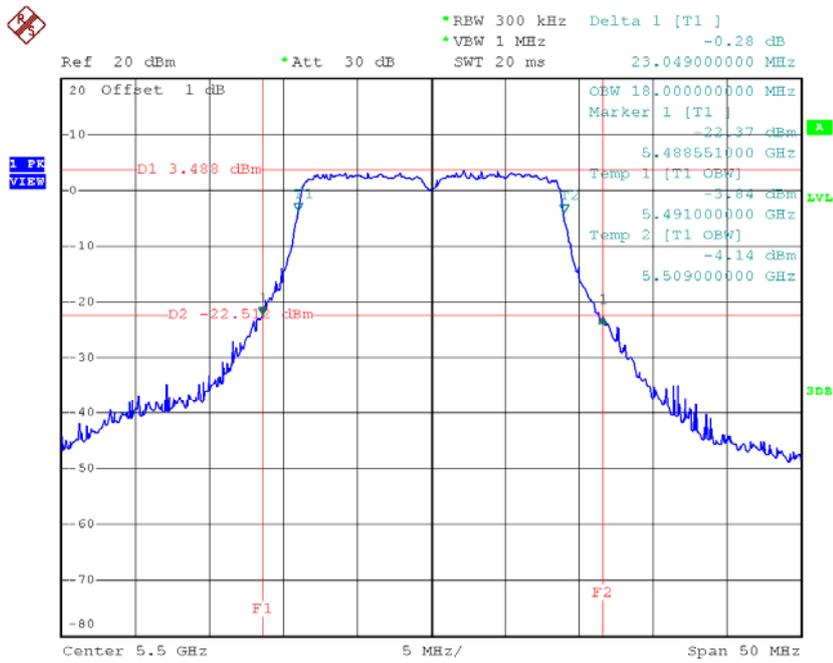


Date: 3.APR.2015 16:01:40

TX CH116

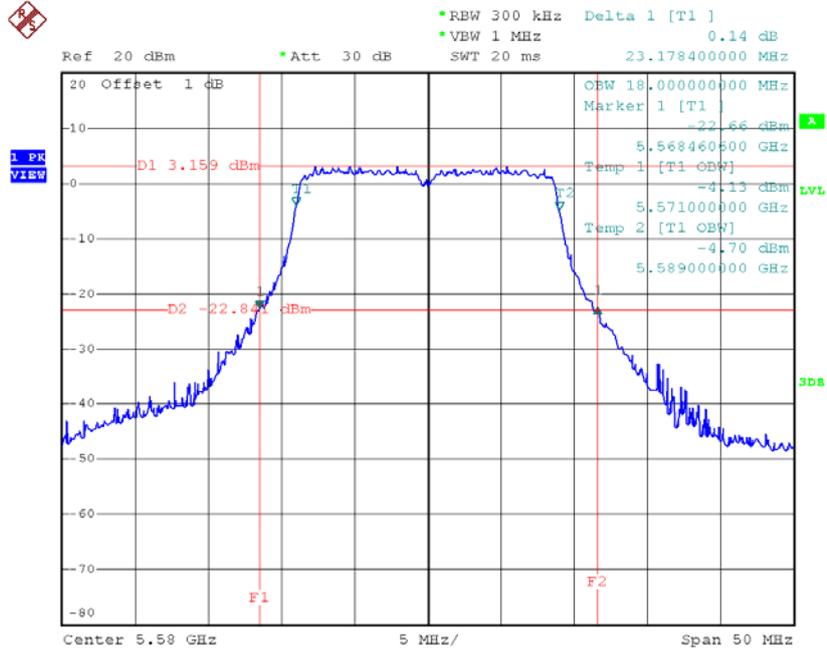

Date: 3.APR.2015 16:02:38

TX CH140

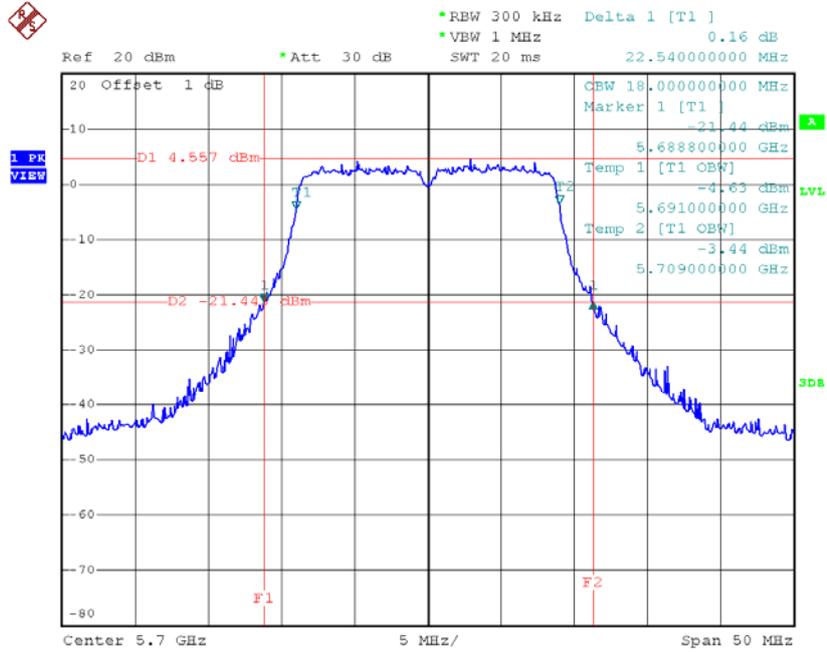


Date: 3.APR.2015 16:03:12

Test Mode: UNII-2C/TX AC80 Mode_CH106/CH122


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH106	5530	84.20	76.00
CH122	5610	83.20	76.00

TX CH106

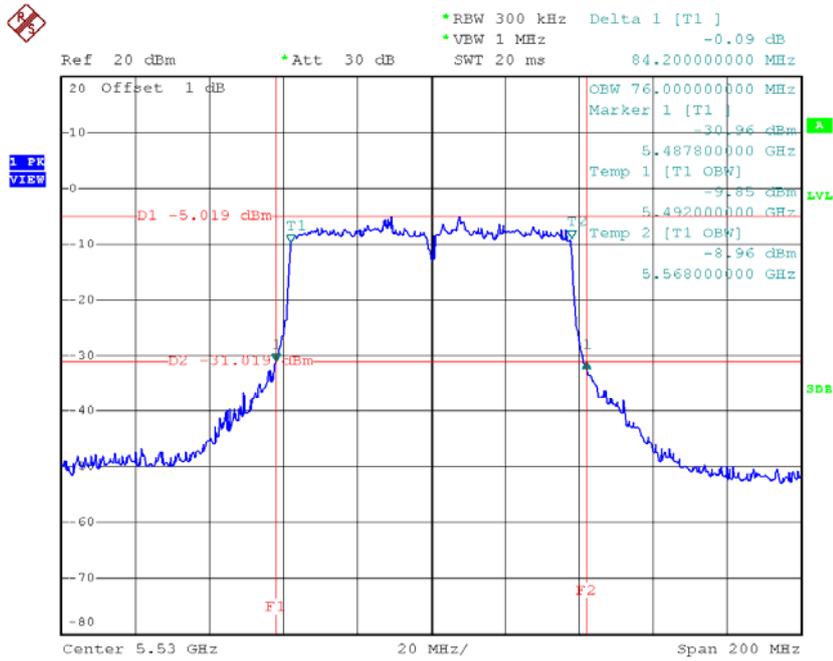

Date: 3.APR.2015 16:42:01

TX CH122

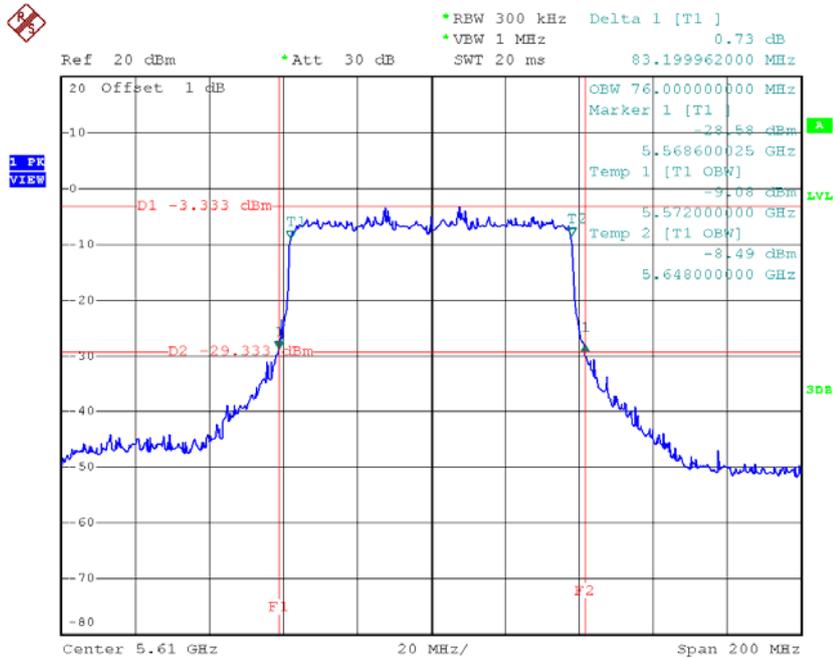


Date: 3.APR.2015 16:43:00

Test Mode: UNII-3/ TX AC20 Mode_ CH149/CH157/CH165


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH149	5745	17.80	18.00	>=500
CH157	5785	17.85	18.00	>=500
CH165	5825	17.79	18.00	>=500

TX CH 149

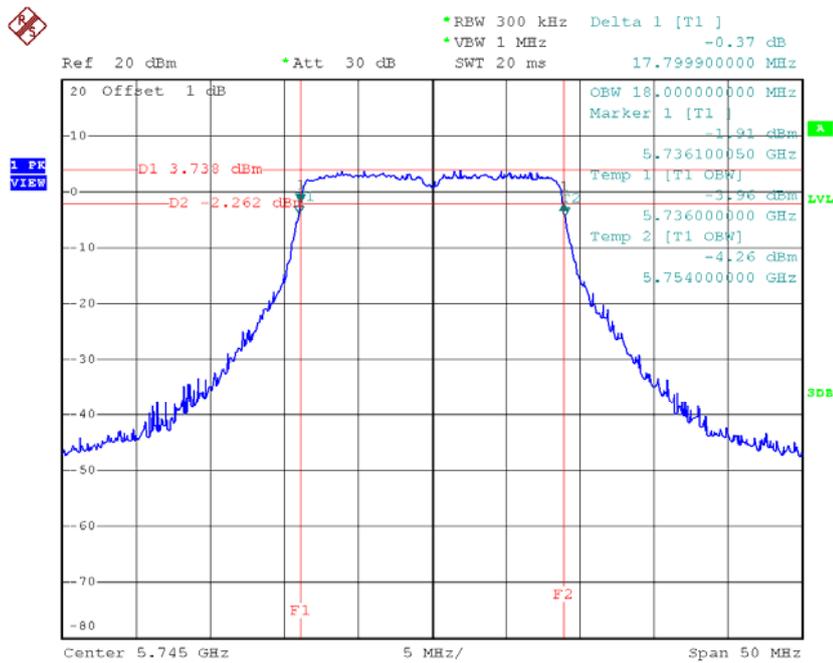


Date: 3.APR.2015 16:03:51

TX CH 157

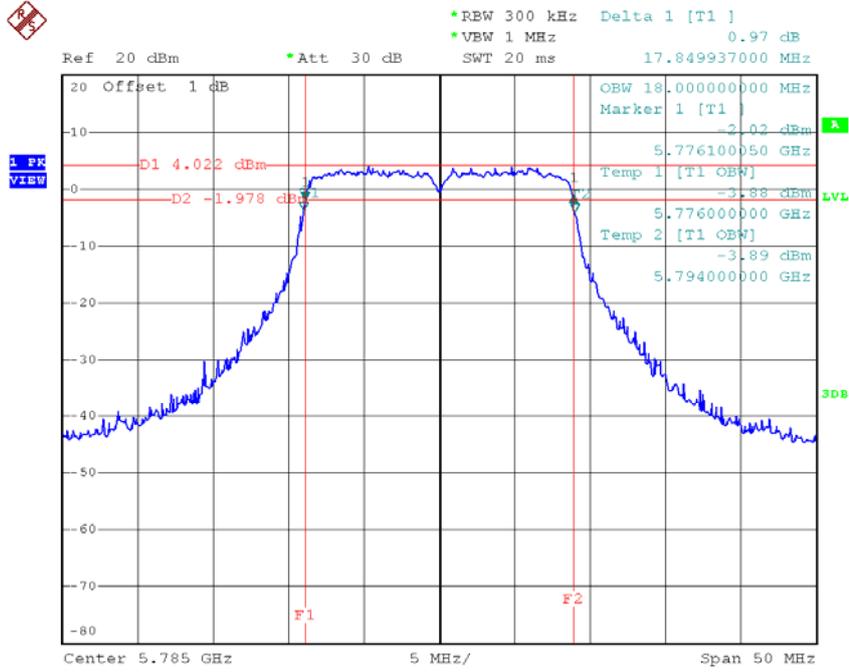

Date: 3.APR.2015 16:04:49

TX CH 165

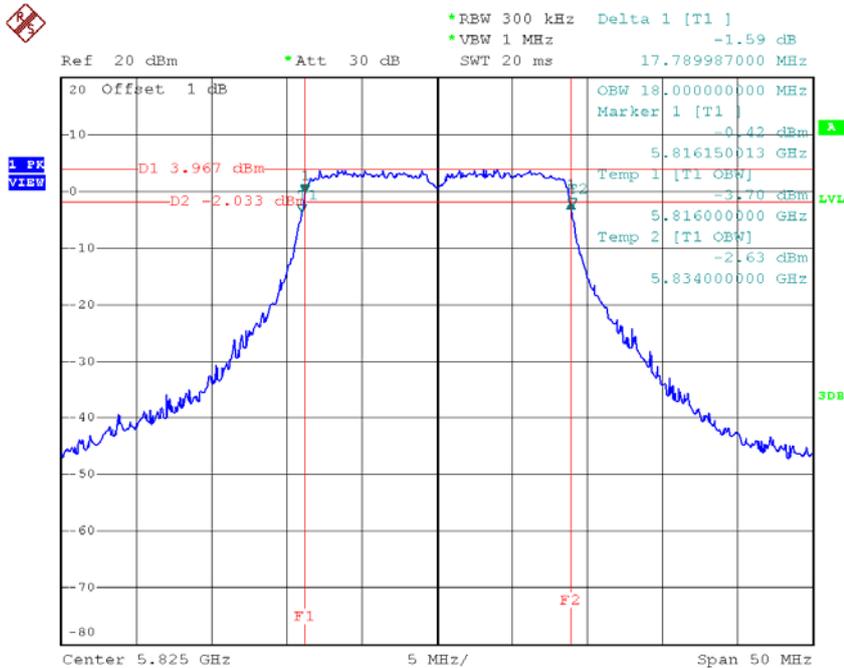


Date: 3.APR.2015 16:05:20

Test Mode: UNII-3/ TX AC40 Mode_CH151/CH159


Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH151	5755	36.50	36.40	>=500
CH159	5795	36.50	36.40	>=500

TX CH 151

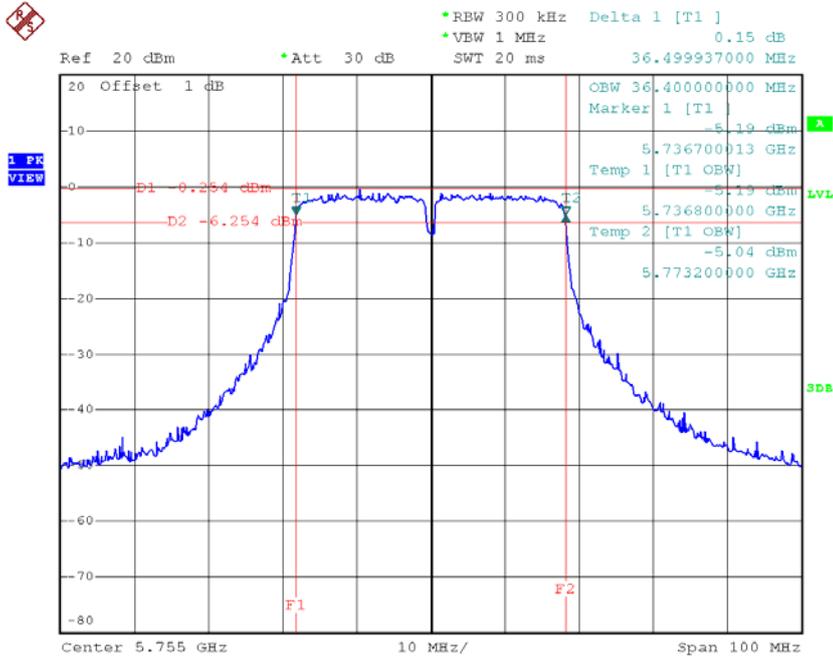

Date: 3.APR.2015 16:32:45


TX CH 159

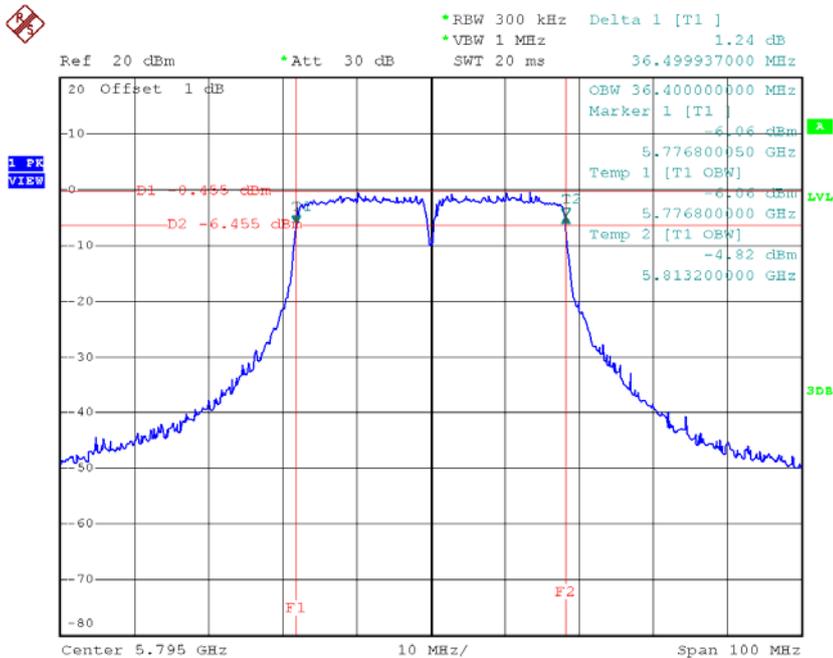

Date: 3.APR.2015 16:33:37

Test Mode: UNII-3/ TX AC80 Mode_CH155

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (kHz)
CH155	5775	76.60	76.00	>=500

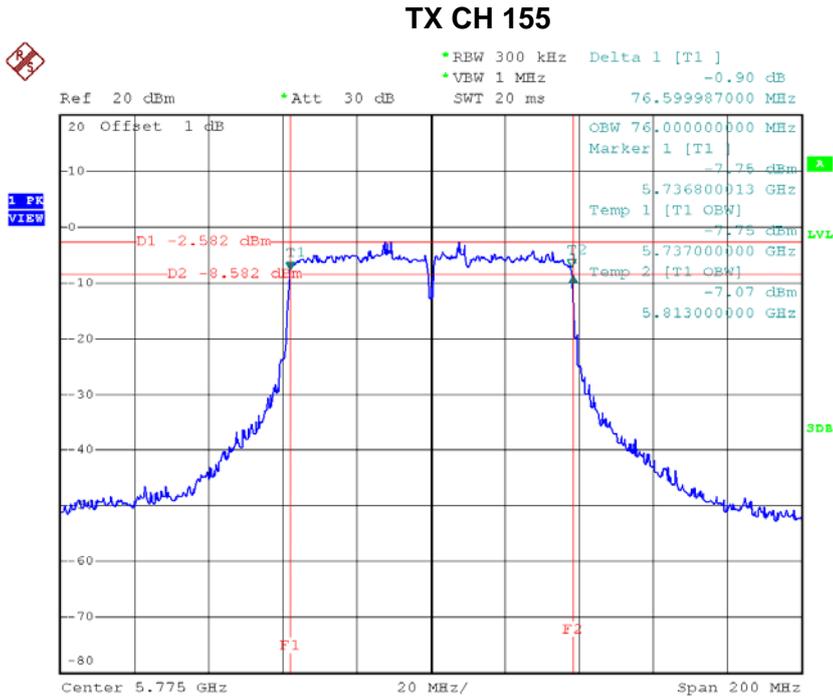

Date: 3.APR.2015 16:43:59

ATTACHMENTF - MAXIMUM OUTPUT POWER

For 1TX

Test Mode: UNII-1/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.31	0.09	19.40	28.00	0.63
CH40	5200	19.26	0.09	19.35	28.00	0.63
CH48	5240	19.51	0.09	19.60	28.00	0.63

Test Mode: UNII-1/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.55	0.07	15.62	28.00	0.63
CH40	5200	15.62	0.07	15.69	28.00	0.63
CH48	5240	15.61	0.07	15.68	28.00	0.63

Test Mode: UNII-1/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.21	0.32	13.53	28.00	0.63
CH46	5230	15.26	0.32	15.58	28.00	0.63

Test Mode: UNII-2A/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.45	0.09	19.54	22.00	0.16
CH60	5300	19.32	0.09	19.41	22.00	0.16
CH64	5320	19.46	0.09	19.55	22.00	0.16

Test Mode: UNII-2A/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.52	0.07	15.59	22.00	0.16
CH60	5300	15.60	0.07	15.67	22.00	0.16
CH64	5320	15.66	0.07	15.73	22.00	0.16

Test Mode: UNII-2A/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.14	0.32	15.46	22.00	0.16
CH62	5310	13.31	0.32	13.63	22.00	0.16

Test Mode: UNII-2C/TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.50	0.09	19.59	22.00	0.16
CH116	5580	19.22	0.09	19.31	22.00	0.16
CH140	5700	19.29	0.09	19.38	22.00	0.16

Test Mode: UNII-2C/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.75	0.07	15.82	22.00	0.16
CH116	5580	15.59	0.07	15.66	22.00	0.16
CH140	5700	15.51	0.07	15.58	22.00	0.16

Test Mode: UNII-2C/TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.36	0.32	15.68	22.00	0.16
CH110	5550	15.32	0.32	15.64	22.00	0.16
CH134	5670	15.41	0.32	15.73	22.00	0.16

Test Mode: UNII-3/ TX A Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.21	0.09	19.30	28.00	0.63
CH157	5785	19.33	0.09	19.42	28.00	0.63
CH165	5825	19.52	0.09	19.61	28.00	0.63

Test Mode: UNII-3/TX N20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.63	0.07	15.70	28.00	0.63
CH157	5785	15.66	0.07	15.73	28.00	0.63
CH165	5825	15.51	0.07	15.58	28.00	0.63

Test Mode: UNII-3/ TX N40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.33	0.32	15.65	28.00	0.63
CH159	5795	15.39	0.32	15.71	28.00	0.63

Test Mode: UNII-1/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.62	0.07	15.69	28.00	0.63
CH40	5200	15.55	0.07	15.62	28.00	0.63
CH48	5240	15.66	0.07	15.73	28.00	0.63

Test Mode: UNII-1/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.15	0.26	13.41	28.00	0.63
CH46	5230	15.21	0.26	15.47	28.00	0.63

Test Mode: UNII-1/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.10	0.61	9.71	28.00	0.63

Test Mode: UNII-2A/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.59	0.07	15.66	22.00	0.16
CH60	5300	15.64	0.07	15.71	22.00	0.16
CH64	5320	15.52	0.07	15.59	22.00	0.16

Test Mode: UNII-2A/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.10	0.26	15.36	22.00	0.16
CH62	5310	13.28	0.26	13.54	22.00	0.16

Test Mode: UNII-2A/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.12	0.61	9.73	22.00	0.16

Test Mode: UNII-2C/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.63	0.07	15.70	22.00	0.16
CH116	5580	15.66	0.07	15.73	22.00	0.16
CH140	5700	15.67	0.07	15.74	22.00	0.16

Test Mode: UNII-2C/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.28	0.26	15.54	22.00	0.16
CH110	5550	15.12	0.26	15.38	22.00	0.16
CH134	5670	15.33	0.26	15.59	22.00	0.16

Test Mode: UNII-2C/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.02	0.61	9.63	22.00	0.16
CH122	5610	16.14	0.61	16.75	22.00	0.16

Test Mode: UNII-3/TX AC20 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.71	0.07	15.78	28.00	0.63
CH157	5785	15.60	0.07	15.67	28.00	0.63
CH165	5825	15.66	0.07	15.73	28.00	0.63

Test Mode: UNII-3/TX AC40 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.26	0.26	15.52	28.00	0.63
CH159	5795	16.12	0.26	16.38	28.00	0.63

Test Mode: UNII-3/TX AC80 Mode

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.12	0.61	11.73	28.00	0.63

For 2TX

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.31	0.09	19.40	28.00	0.63
CH40	5200	19.26	0.09	19.35	28.00	0.63
CH48	5240	19.51	0.09	19.60	28.00	0.63

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.43	0.09	15.52	28.00	0.63
CH40	5200	15.42	0.09	15.51	28.00	0.63
CH48	5240	15.46	0.09	15.55	28.00	0.63

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.80	0.09	20.89	28.00	0.63
CH40	5200	20.76	0.09	20.85	28.00	0.63
CH48	5240	20.95	0.09	21.04	28.00	0.63

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.55	0.07	15.62	28.00	0.63
CH40	5200	15.62	0.07	15.69	28.00	0.63
CH48	5240	15.61	0.07	15.68	28.00	0.63

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.66	0.07	15.73	28.00	0.63
CH40	5200	15.43	0.07	15.50	28.00	0.63
CH48	5240	15.46	0.07	15.53	28.00	0.63

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.62	0.07	18.69	28.00	0.63
CH40	5200	18.54	0.07	18.61	28.00	0.63
CH48	5240	18.55	0.07	18.62	28.00	0.63

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.21	0.32	13.53	28.00	0.63
CH46	5230	15.26	0.32	15.58	28.00	0.63

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.11	0.32	15.43	28.00	0.63
CH46	5230	15.21	0.32	15.53	28.00	0.63

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	17.27	0.32	17.59	28.00	0.63
CH46	5230	18.25	0.32	18.57	28.00	0.63

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.45	0.09	19.54	22.00	0.16
CH60	5300	19.32	0.09	19.41	22.00	0.16
CH64	5320	19.46	0.09	19.55	22.00	0.16

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.43	0.09	15.52	22.00	0.16
CH60	5300	15.56	0.09	15.65	22.00	0.16
CH64	5320	15.44	0.09	15.53	22.00	0.16

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	20.90	0.09	20.99	22.00	0.16
CH60	5300	20.85	0.09	20.94	22.00	0.16
CH64	5320	20.91	0.09	21.00	22.00	0.16

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.52	0.07	15.59	22.00	0.16
CH60	5300	15.60	0.07	15.67	22.00	0.16
CH64	5320	15.66	0.07	15.73	22.00	0.16

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.68	0.07	15.75	22.00	0.16
CH60	5300	15.46	0.07	15.53	22.00	0.16
CH64	5320	15.65	0.07	15.72	22.00	0.16

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.61	0.07	18.68	22.00	0.16
CH60	5300	18.54	0.07	18.61	22.00	0.16
CH64	5320	18.67	0.07	18.74	22.00	0.16

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.14	0.32	15.46	22.00	0.16
CH62	5310	13.31	0.32	13.63	22.00	0.16

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.22	0.32	15.54	22.00	0.16
CH62	5310	13.23	0.32	13.55	22.00	0.16

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	18.19	0.32	18.51	22.00	0.16
CH62	5310	16.28	0.32	16.60	22.00	0.16

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.50	0.09	19.59	22.00	0.16
CH116	5580	19.22	0.09	19.31	22.00	0.16
CH140	5700	19.29	0.09	19.38	22.00	0.16

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.51	0.09	15.60	22.00	0.16
CH116	5580	15.53	0.09	15.62	22.00	0.16
CH140	5700	15.42	0.09	15.51	22.00	0.16

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	20.96	0.09	21.05	22.00	0.16
CH116	5580	20.77	0.09	20.86	22.00	0.16
CH140	5700	20.78	0.09	20.87	22.00	0.16

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.75	0.07	15.82	22.00	0.16
CH116	5580	15.59	0.07	15.66	22.00	0.16
CH140	5700	15.51	0.07	15.58	22.00	0.16

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.50	0.07	15.57	22.00	0.16
CH116	5580	15.67	0.07	15.74	22.00	0.16
CH140	5700	15.50	0.07	15.57	22.00	0.16

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.64	0.07	18.71	22.00	0.16
CH116	5580	18.64	0.07	18.71	22.00	0.16
CH140	5700	18.52	0.07	18.59	22.00	0.16

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.36	0.32	15.68	22.00	0.16
CH110	5550	15.32	0.32	15.64	22.00	0.16
CH134	5670	15.41	0.32	15.73	22.00	0.16

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.28	0.32	15.60	22.00	0.16
CH110	5550	15.30	0.32	15.62	22.00	0.16
CH134	5670	15.36	0.32	15.68	22.00	0.16

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	18.33	0.32	18.65	22.00	0.16
CH110	5550	18.32	0.32	18.64	22.00	0.16
CH134	5670	18.40	0.32	18.72	22.00	0.16

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.21	0.09	19.30	28.00	0.63
CH157	5785	19.33	0.09	19.42	28.00	0.63
CH165	5825	19.52	0.09	19.61	28.00	0.63

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.53	0.09	15.62	28.00	0.63
CH157	5785	15.41	0.09	15.50	28.00	0.63
CH165	5825	15.67	0.09	15.76	28.00	0.63

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.76	0.09	20.85	28.00	0.63
CH157	5785	20.81	0.09	20.90	28.00	0.63
CH165	5825	21.02	0.09	21.11	28.00	0.63

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.63	0.07	15.70	28.00	0.63
CH157	5785	15.66	0.07	15.73	28.00	0.63
CH165	5825	15.51	0.07	15.58	28.00	0.63

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.62	0.07	15.69	28.00	0.63
CH157	5785	15.31	0.07	15.38	28.00	0.63
CH165	5825	15.71	0.07	15.78	28.00	0.63

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.64	0.07	18.71	28.00	0.63
CH157	5785	18.50	0.07	18.57	28.00	0.63
CH165	5825	18.62	0.07	18.69	28.00	0.63

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.33	0.32	15.65	28.00	0.63
CH159	5795	15.39	0.32	15.71	28.00	0.63

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.24	0.32	15.56	28.00	0.63
CH159	5795	15.12	0.32	15.44	28.00	0.63

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	18.30	0.32	18.62	28.00	0.63
CH159	5795	18.27	0.32	18.59	28.00	0.63

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.62	0.07	15.69	28.00	0.63
CH40	5200	15.55	0.07	15.62	28.00	0.63
CH48	5240	15.66	0.07	15.73	28.00	0.63

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.63	0.07	15.70	28.00	0.63
CH40	5200	15.72	0.07	15.79	28.00	0.63
CH48	5240	15.73	0.07	15.80	28.00	0.63

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	18.64	0.07	18.71	28.00	0.63
CH40	5200	18.65	0.07	18.72	28.00	0.63
CH48	5240	18.71	0.07	18.78	28.00	0.63

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.15	0.26	13.41	28.00	0.63
CH46	5230	15.21	0.26	15.47	28.00	0.63

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.32	0.26	13.58	28.00	0.63
CH46	5230	15.35	0.26	15.61	28.00	0.63

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	16.25	0.26	16.51	28.00	0.63
CH46	5230	18.29	0.26	18.55	28.00	0.63

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.10	0.61	9.71	28.00	0.63

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.28	0.61	9.89	28.00	0.63

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	12.20	0.61	12.81	28.00	0.63

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.59	0.07	15.66	22.00	0.16
CH60	5300	15.64	0.07	15.71	22.00	0.16
CH64	5320	15.52	0.07	15.59	22.00	0.16

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.69	0.07	15.76	22.00	0.16
CH60	5300	15.43	0.07	15.50	22.00	0.16
CH64	5320	15.71	0.07	15.78	22.00	0.16

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	18.65	0.07	18.72	22.00	0.16
CH60	5300	18.55	0.07	18.62	22.00	0.16
CH64	5320	18.63	0.07	18.70	22.00	0.16

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.10	0.26	15.36	22.00	0.16
CH62	5310	13.28	0.26	13.54	22.00	0.16

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.41	0.26	14.67	22.00	0.16
CH62	5310	11.56	0.26	11.82	22.00	0.16

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	17.78	0.26	18.04	22.00	0.16
CH62	5310	15.51	0.26	15.77	22.00	0.16

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.12	0.61	9.73	22.00	0.16

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.06	0.61	9.67	22.00	0.16

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	12.10	0.61	12.71	22.00	0.16

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.63	0.07	15.70	22.00	0.16
CH116	5580	15.66	0.07	15.73	22.00	0.16
CH140	5700	15.67	0.07	15.74	22.00	0.16

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.66	0.07	15.73	22.00	0.16
CH116	5580	15.52	0.07	15.59	22.00	0.16
CH140	5700	15.67	0.07	15.74	22.00	0.16

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	18.66	0.07	18.73	22.00	0.16
CH116	5580	18.60	0.07	18.67	22.00	0.16
CH140	5700	18.68	0.07	18.75	22.00	0.16

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.28	0.26	15.54	22.00	0.16
CH110	5550	15.12	0.26	15.38	22.00	0.16
CH134	5670	15.33	0.26	15.59	22.00	0.16

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.71	0.26	14.97	22.00	0.16
CH110	5550	14.39	0.26	14.65	22.00	0.16
CH134	5670	14.52	0.26	14.78	22.00	0.16

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	18.01	0.26	18.27	22.00	0.16
CH110	5550	17.78	0.26	18.04	22.00	0.16
CH134	5670	17.75	0.26	18.21	22.00	0.16

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.02	0.61	9.63	22.00	0.16
CH122	5610	16.14	0.61	16.75	22.00	0.16

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.11	0.61	9.72	22.00	0.16
CH122	5610	16.06	0.61	16.67	22.00	0.16

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	12.08	0.61	12.69	22.00	0.16
CH122	5610	19.11	0.61	19.72	22.00	0.16

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.71	0.07	15.78	28.00	0.63
CH157	5785	15.60	0.07	15.67	28.00	0.63
CH165	5825	15.66	0.07	15.73	28.00	0.63

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.68	0.07	15.75	28.00	0.63
CH157	5785	15.81	0.07	15.88	28.00	0.63
CH165	5825	15.63	0.07	15.70	28.00	0.63

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	18.71	0.07	18.78	28.00	0.63
CH157	5785	18.72	0.07	18.79	28.00	0.63
CH165	5825	18.66	0.07	18.73	28.00	0.63

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.26	0.26	15.52	28.00	0.63
CH159	5795	16.12	0.26	16.38	28.00	0.63

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.38	0.26	14.64	28.00	0.63
CH159	5795	14.46	0.26	14.72	28.00	0.63

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	17.85	0.26	18.11	28.00	0.63
CH159	5795	18.38	0.26	18.64	28.00	0.63

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.12	0.61	11.73	28.00	0.63

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.12	0.61	11.73	28.00	0.63

Test Mode: UNII-3/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	14.13	0.61	14.74	28.00	0.63

For 3TX

Test Mode: UNII-1/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	19.31	0.09	19.40	28.00	0.63
CH40	5200	19.26	0.09	19.35	28.00	0.63
CH48	5240	19.51	0.09	19.60	28.00	0.63

Test Mode: UNII-1/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.43	0.09	15.52	28.00	0.63
CH40	5200	15.42	0.09	15.51	28.00	0.63
CH48	5240	15.46	0.09	15.55	28.00	0.63

Test Mode: UNII-1/TX A Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.76	0.09	14.85	28.00	0.63
CH40	5200	14.71	0.09	14.80	28.00	0.63
CH48	5240	14.83	0.09	14.92	28.00	0.63

Test Mode: UNII-1/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	21.77	0.09	21.86	28.00	0.63
CH40	5200	21.72	0.09	21.81	28.00	0.63
CH48	5240	21.90	0.09	21.99	28.00	0.63

Test Mode: UNII-1/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.55	0.07	15.62	28.00	0.63
CH40	5200	15.62	0.07	15.69	28.00	0.63
CH48	5240	15.61	0.07	15.68	28.00	0.63

Test Mode: UNII-1/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.66	0.07	15.73	28.00	0.63
CH40	5200	15.43	0.07	15.50	28.00	0.63
CH48	5240	15.46	0.07	15.53	28.00	0.63

Test Mode: UNII-1/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.87	0.07	14.94	28.00	0.63
CH40	5200	14.70	0.07	14.77	28.00	0.63
CH48	5240	14.89	0.07	14.96	28.00	0.63

Test Mode: UNII-1/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.15	0.07	20.22	28.00	0.63
CH40	5200	20.04	0.07	20.11	28.00	0.63
CH48	5240	20.10	0.07	20.17	28.00	0.63

Test Mode: UNII-1/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.21	0.32	13.53	28.00	0.63
CH46	5230	15.26	0.32	15.58	28.00	0.63

Test Mode: UNII-1/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	15.11	0.32	15.43	28.00	0.63
CH46	5230	15.21	0.32	15.53	28.00	0.63

Test Mode: UNII-1/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	11.33	0.32	11.65	28.00	0.63
CH46	5230	14.31	0.32	14.63	28.00	0.63

Test Mode: UNII-1/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.26	0.32	18.58	28.00	0.63
CH46	5230	19.72	0.32	20.04	28.00	0.63

Test Mode: UNII-2A/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	19.45	0.09	19.54	22.00	0.16
CH60	5300	19.32	0.09	19.41	22.00	0.16
CH64	5320	19.46	0.09	19.55	22.00	0.16

Test Mode: UNII-2A/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.43	0.09	15.52	22.00	0.16
CH60	5300	15.56	0.09	15.65	22.00	0.16
CH64	5320	15.44	0.09	15.53	22.00	0.16

Test Mode: UNII-2A/TX A Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.73	0.09	14.82	22.00	0.16
CH60	5300	14.81	0.09	14.90	22.00	0.16
CH64	5320	14.72	0.09	14.81	22.00	0.16

Test Mode: UNII-2A/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	21.84	0.09	21.93	22.00	0.16
CH60	5300	21.81	0.09	21.90	22.00	0.16
CH64	5320	21.85	0.09	21.94	22.00	0.16

Test Mode: UNII-2A/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.52	0.07	15.59	22.00	0.16
CH60	5300	15.60	0.07	15.67	22.00	0.16
CH64	5320	15.66	0.07	15.73	22.00	0.16

Test Mode: UNII-2A/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.68	0.07	15.75	22.00	0.16
CH60	5300	15.46	0.07	15.53	22.00	0.16
CH64	5320	15.65	0.07	15.72	22.00	0.16

Test Mode: UNII-2A/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.72	0.07	14.79	22.00	0.16
CH60	5300	14.75	0.07	14.82	22.00	0.16
CH64	5320	14.76	0.07	14.83	22.00	0.16

Test Mode: UNII-2A/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	20.10	0.07	20.17	22.00	0.16
CH60	5300	20.06	0.07	20.13	22.00	0.16
CH64	5320	20.15	0.07	20.22	22.00	0.16

Test Mode: UNII-2A/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.14	0.32	15.46	22.00	0.16
CH62	5310	13.31	0.32	13.63	22.00	0.16

Test Mode: UNII-2A/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.22	0.32	15.54	22.00	0.16
CH62	5310	13.23	0.32	13.55	22.00	0.16

Test Mode: UNII-2A/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.52	0.32	14.84	22.00	0.16
CH62	5310	11.32	0.32	11.64	22.00	0.16

Test Mode: UNII-2A/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	19.74	0.32	20.06	22.00	0.16
CH62	5310	17.48	0.32	17.80	22.00	0.16

Test Mode: UNII-2C/TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	19.50	0.09	19.59	22.00	0.16
CH116	5580	19.22	0.09	19.31	22.00	0.16
CH140	5700	19.29	0.09	19.38	22.00	0.16

Test Mode: UNII-2C/TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.51	0.09	15.60	22.00	0.16
CH116	5580	15.53	0.09	15.62	22.00	0.16
CH140	5700	15.42	0.09	15.51	22.00	0.16

Test Mode: UNII-2C/TX A Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.86	0.09	14.95	22.00	0.16
CH116	5580	14.73	0.09	14.82	22.00	0.16
CH140	5700	14.74	0.09	14.83	22.00	0.16

Test Mode: UNII-2C/TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	21.91	0.09	22.00	22.00	0.16
CH116	5580	21.73	0.09	21.82	22.00	0.16
CH140	5700	21.75	0.09	21.84	22.00	0.16

Test Mode: UNII-2C/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.75	0.07	15.82	22.00	0.16
CH116	5580	15.59	0.07	15.66	22.00	0.16
CH140	5700	15.51	0.07	15.58	22.00	0.16

Test Mode: UNII-2C/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.50	0.07	15.57	22.00	0.16
CH116	5580	15.67	0.07	15.74	22.00	0.16
CH140	5700	15.50	0.07	15.57	22.00	0.16

Test Mode: UNII-2C/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.82	0.07	14.89	22.00	0.16
CH116	5580	14.75	0.07	14.82	22.00	0.16
CH140	5700	14.90	0.07	14.97	22.00	0.16

Test Mode: UNII-2C/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	20.15	0.07	20.22	22.00	0.16
CH116	5580	20.13	0.07	20.20	22.00	0.16
CH140	5700	20.08	0.07	20.15	22.00	0.16

Test Mode: UNII-2C/TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.36	0.32	15.68	22.00	0.16
CH110	5550	15.32	0.32	15.64	22.00	0.16
CH134	5670	15.41	0.32	15.73	22.00	0.16

Test Mode: UNII-2C/TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.28	0.32	15.60	22.00	0.16
CH110	5550	15.30	0.32	15.62	22.00	0.16
CH134	5670	15.36	0.32	15.68	22.00	0.16

Test Mode: UNII-2C/TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.50	0.32	14.82	22.00	0.16
CH110	5550	14.28	0.32	14.60	22.00	0.16
CH134	5670	14.39	0.32	14.71	22.00	0.16

Test Mode: UNII-2C/TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	19.83	0.32	20.15	22.00	0.16
CH110	5550	19.76	0.32	20.08	22.00	0.16
CH134	5670	19.85	0.32	20.17	22.00	0.16

Test Mode: UNII-3/ TX A Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.21	0.09	19.30	28.00	0.63
CH157	5785	19.33	0.09	19.42	28.00	0.63
CH165	5825	19.52	0.09	19.61	28.00	0.63

Test Mode: UNII-3/ TX A Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.53	0.09	15.62	28.00	0.63
CH157	5785	15.41	0.09	15.50	28.00	0.63
CH165	5825	15.67	0.09	15.76	28.00	0.63

Test Mode: UNII-3/ TX A Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.80	0.09	14.89	28.00	0.63
CH157	5785	14.82	0.09	14.91	28.00	0.63
CH165	5825	14.77	0.09	14.86	28.00	0.63

Test Mode: UNII-3/ TX A Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	21.74	0.09	21.83	28.00	0.63
CH157	5785	21.78	0.09	21.87	28.00	0.63
CH165	5825	21.94	0.09	22.03	28.00	0.63

Test Mode: UNII-3/TX N20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.63	0.07	15.70	28.00	0.63
CH157	5785	15.66	0.07	15.73	28.00	0.63
CH165	5825	15.51	0.07	15.58	28.00	0.63

Test Mode: UNII-3/TX N20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.62	0.07	15.69	28.00	0.63
CH157	5785	15.31	0.07	15.38	28.00	0.63
CH165	5825	15.71	0.07	15.78	28.00	0.63

Test Mode: UNII-3/TX N20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.88	0.07	14.95	28.00	0.63
CH157	5785	14.83	0.07	14.90	28.00	0.63
CH165	5825	14.75	0.07	14.82	28.00	0.63

Test Mode: UNII-3/TX N20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.16	0.07	20.23	28.00	0.63
CH157	5785	20.05	0.07	20.12	28.00	0.63
CH165	5825	20.11	0.07	20.18	28.00	0.63

Test Mode: UNII-3/ TX N40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.33	0.32	15.65	28.00	0.63
CH159	5795	15.39	0.32	15.71	28.00	0.63

Test Mode: UNII-3/ TX N40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.24	0.32	15.56	28.00	0.63
CH159	5795	15.12	0.32	15.44	28.00	0.63

Test Mode: UNII-3/ TX N40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.43	0.32	14.75	28.00	0.63
CH159	5795	14.34	0.32	14.66	28.00	0.63

Test Mode: UNII-3/ TX N40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	19.79	0.32	20.11	28.00	0.63
CH159	5795	19.74	0.32	20.06	28.00	0.63

Test Mode: UNII-1/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.62	0.07	15.69	28.00	0.63
CH40	5200	15.55	0.07	15.62	28.00	0.63
CH48	5240	15.66	0.07	15.73	28.00	0.63

Test Mode: UNII-1/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	15.63	0.07	15.70	28.00	0.63
CH40	5200	15.72	0.07	15.79	28.00	0.63
CH48	5240	15.73	0.07	15.80	28.00	0.63

Test Mode: UNII-1/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	14.86	0.07	14.93	28.00	0.63
CH40	5200	14.67	0.07	14.74	28.00	0.63
CH48	5240	14.73	0.07	14.80	28.00	0.63

Test Mode: UNII-1/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH36	5180	20.16	0.07	20.23	28.00	0.63
CH40	5200	20.11	0.07	20.18	28.00	0.63
CH48	5240	20.14	0.07	20.24	28.00	0.63

Test Mode: UNII-1/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.15	0.26	13.41	28.00	0.63
CH46	5230	15.21	0.26	15.47	28.00	0.63

Test Mode: UNII-1/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	13.32	0.26	13.58	28.00	0.63
CH46	5230	15.35	0.26	15.61	28.00	0.63

Test Mode: UNII-1/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	14.39	0.26	14.65	28.00	0.63
CH46	5230	14.31	0.26	14.57	28.00	0.63

Test Mode: UNII-1/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH38	5190	18.43	0.26	18.69	28.00	0.63
CH46	5230	19.75	0.26	20.01	28.00	0.63

Test Mode: UNII-1/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.10	0.61	9.71	28.00	0.63

Test Mode: UNII-1/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.28	0.61	9.89	28.00	0.63

Test Mode: UNII-1/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	9.15	0.61	9.76	28.00	0.63

Test Mode: UNII-1/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH42	5210	13.95	0.61	14.56	28.00	0.63

Test Mode: UNII-2A/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.59	0.07	15.66	22.00	0.16
CH60	5300	15.64	0.07	15.71	22.00	0.16
CH64	5320	15.52	0.07	15.59	22.00	0.16

Test Mode: UNII-2A/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	15.69	0.07	15.76	22.00	0.16
CH60	5300	15.43	0.07	15.50	22.00	0.16
CH64	5320	15.71	0.07	15.78	22.00	0.16

Test Mode: UNII-2A/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	14.85	0.07	14.92	22.00	0.16
CH60	5300	14.81	0.07	14.88	22.00	0.16
CH64	5320	14.83	0.07	14.90	22.00	0.16

Test Mode: UNII-2A/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH52	5260	20.16	0.07	20.23	22.00	0.16
CH60	5300	20.08	0.07	20.15	22.00	0.16
CH64	5320	20.14	0.07	20.21	22.00	0.16

Test Mode: UNII-2A/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	15.10	0.26	15.36	22.00	0.16
CH62	5310	13.28	0.26	13.54	22.00	0.16

Test Mode: UNII-2A/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.41	0.26	14.67	22.00	0.16
CH62	5310	11.56	0.26	11.82	22.00	0.16

Test Mode: UNII-2A/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	14.29	0.26	14.55	22.00	0.16
CH62	5310	14.22	0.26	14.48	22.00	0.16

Test Mode: UNII-2A/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH54	5270	19.39	0.26	19.65	22.00	0.16
CH62	5310	17.93	0.26	18.19	22.00	0.16

Test Mode: UNII-2A/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.12	0.61	9.73	22.00	0.16

Test Mode: UNII-2A/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.06	0.61	9.67	22.00	0.16

Test Mode: UNII-2A/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	9.01	0.61	9.62	22.00	0.16

Test Mode: UNII-2A/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH58	5290	13.83	0.61	14.44	22.00	0.16

Test Mode: UNII-2C/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.63	0.07	15.70	22.00	0.16
CH116	5580	15.66	0.07	15.73	22.00	0.16
CH140	5700	15.67	0.07	15.74	22.00	0.16

Test Mode: UNII-2C/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	15.66	0.07	15.73	22.00	0.16
CH116	5580	15.52	0.07	15.59	22.00	0.16
CH140	5700	15.67	0.07	15.74	22.00	0.16

Test Mode: UNII-2C/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	14.75	0.07	14.82	22.00	0.16
CH116	5580	14.75	0.07	14.82	22.00	0.16
CH140	5700	14.85	0.07	14.92	22.00	0.16

Test Mode: UNII-2C/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH100	5500	20.14	0.07	20.21	22.00	0.16
CH116	5580	20.10	0.07	20.17	22.00	0.16
CH140	5700	20.18	0.07	20.25	22.00	0.16

Test Mode: UNII-2C/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	15.28	0.26	15.54	22.00	0.16
CH110	5550	15.12	0.26	15.38	22.00	0.16
CH134	5670	15.33	0.26	15.59	22.00	0.16

Test Mode: UNII-2C/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.71	0.26	14.97	22.00	0.16
CH110	5550	14.39	0.26	14.65	22.00	0.16
CH134	5670	14.52	0.26	14.78	22.00	0.16

Test Mode: UNII-2C/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	14.35	0.26	14.61	22.00	0.16
CH110	5550	14.38	0.26	14.64	22.00	0.16
CH134	5670	14.46	0.26	14.72	22.00	0.16

Test Mode: UNII-2C/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH102	5510	19.83	0.26	19.83	22.00	0.16
CH110	5550	19.68	0.26	19.68	22.00	0.16
CH134	5670	19.82	0.26	19.82	22.00	0.16

Test Mode: UNII-2C/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.02	0.61	9.63	22.00	0.16
CH122	5610	16.14	0.61	16.75	22.00	0.16

Test Mode: UNII-2C/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.11	0.61	9.72	22.00	0.16
CH122	5610	16.06	0.61	16.67	22.00	0.16

Test Mode: UNII-2C/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	9.26	0.61	9.87	22.00	0.16
CH122	5610	16.23	0.61	16.84	22.00	0.16

Test Mode: UNII-2C/TX AC80 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH106	5530	13.90	0.61	14.51	22.00	0.16
CH122	5610	20.92	0.61	21.53	22.00	0.16

Test Mode: UNII-3/TX AC20 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.71	0.07	15.78	28.00	0.63
CH157	5785	15.60	0.07	15.67	28.00	0.63
CH165	5825	15.66	0.07	15.73	28.00	0.63

Test Mode: UNII-3/TX AC20 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	15.68	0.07	15.75	28.00	0.63
CH157	5785	15.81	0.07	15.88	28.00	0.63
CH165	5825	15.63	0.07	15.70	28.00	0.63

Test Mode: UNII-3/TX AC20 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	14.81	0.07	14.88	28.00	0.63
CH157	5785	14.82	0.07	14.89	28.00	0.63
CH165	5825	14.71	0.07	14.78	28.00	0.63

Test Mode: UNII-3/TX AC20 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.19	0.07	20.26	28.00	0.63
CH157	5785	20.20	0.07	20.27	28.00	0.63
CH165	5825	20.13	0.07	20.20	28.00	0.63

Test Mode: UNII-3/TX AC40 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	15.26	0.26	15.52	28.00	0.63
CH159	5795	16.12	0.26	16.38	28.00	0.63

Test Mode: UNII-3/TX AC40 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.38	0.26	14.64	28.00	0.63
CH159	5795	14.46	0.26	14.72	28.00	0.63

Test Mode: UNII-3/TX AC40 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	14.42	0.26	14.68	28.00	0.63
CH159	5795	14.39	0.26	14.65	28.00	0.63

Test Mode: UNII-3/TX AC40 Mode_Total

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	19.48	0.26	19.74	28.00	0.63
CH159	5795	19.84	0.26	20.10	28.00	0.63

Test Mode: UNII-3/TX AC80 Mode_ANT 1

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.12	0.61	11.73	28.00	0.63

Test Mode: UNII-3/TX AC80 Mode_ANT 2

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.12	0.61	11.73	28.00	0.63

Test Mode: UNII-3/TX AC80 Mode_ANT 3

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	11.28	0.61	11.89	28.00	0.63

Test Mode: UNII-3/TX AC80 Mode_Total


Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor (dBm)	Output Power+Duty Factor (dBm)	Limit (dBm)	Limit (Watt)
CH155	5775	15.35	0.61	16.56	28.00	0.63

**ATTACHMENTG - ANTENNA CONDUCTED SPURIOUS
EMISSION**

For 1TX


Test Mode: UNII-1/TX A Mode

TX mode CH36

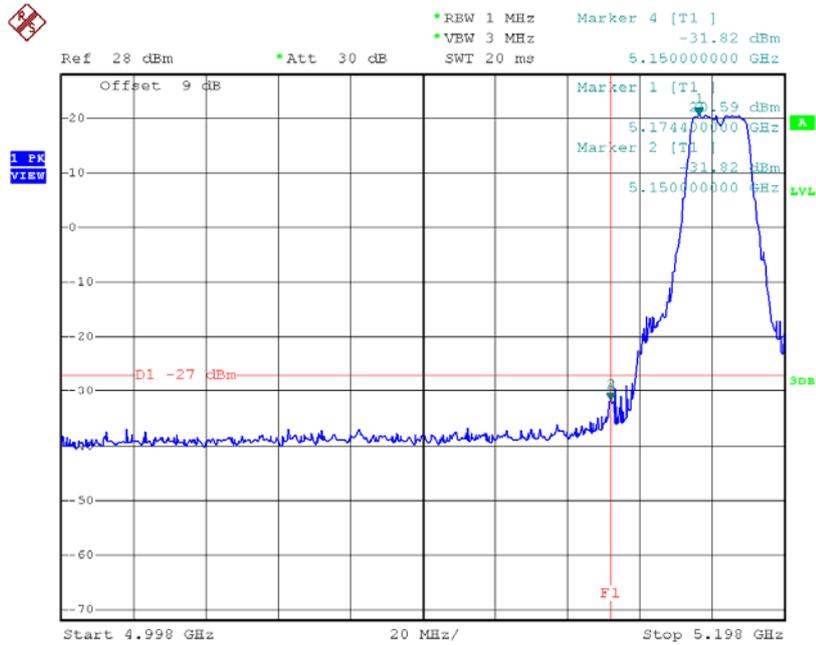

Date: 3.APR.2015 15:33:33


TX mode CH48

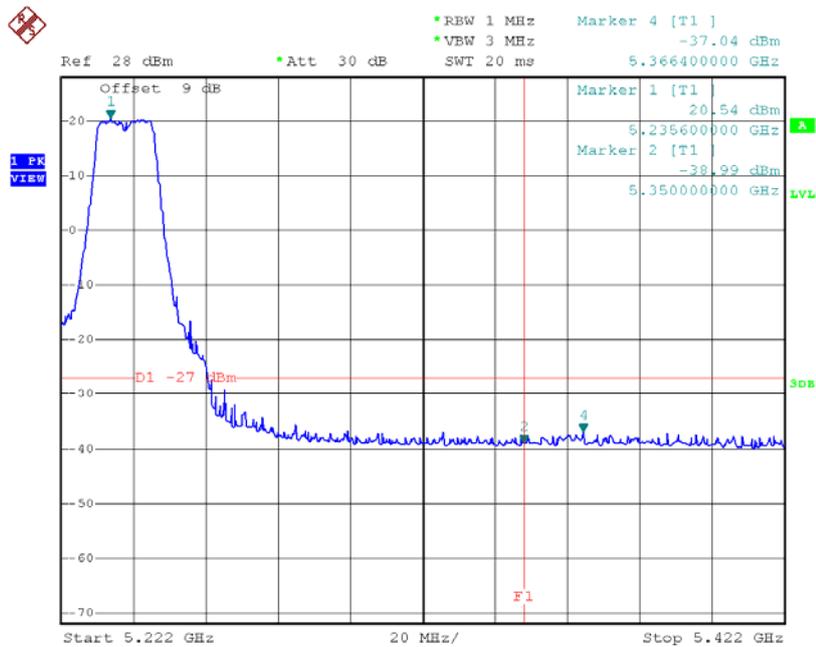

Date: 3.APR.2015 15:36:42


Test Mode: UNII-1/TX N20 Mode

TX mode CH36

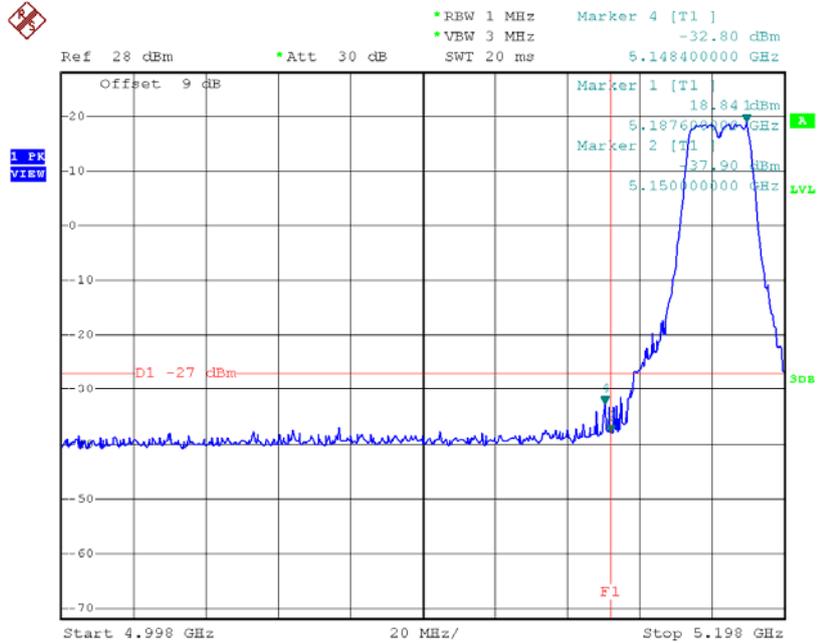

Date: 3.APR.2015 15:48:02


TX mode CH48

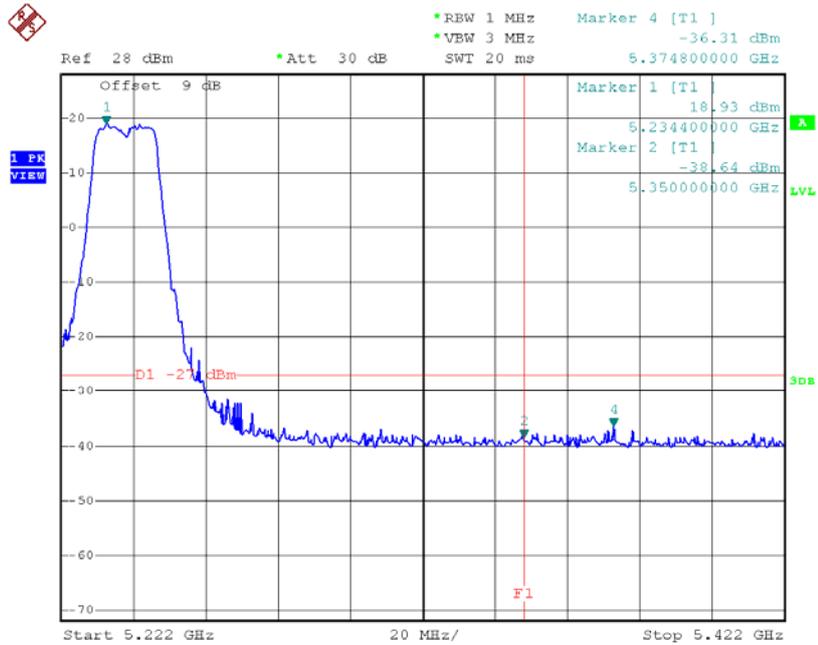

Date: 3.APR.2015 15:49:57


Test Mode: UNII-1/TX N40 Mode

TX mode CH38

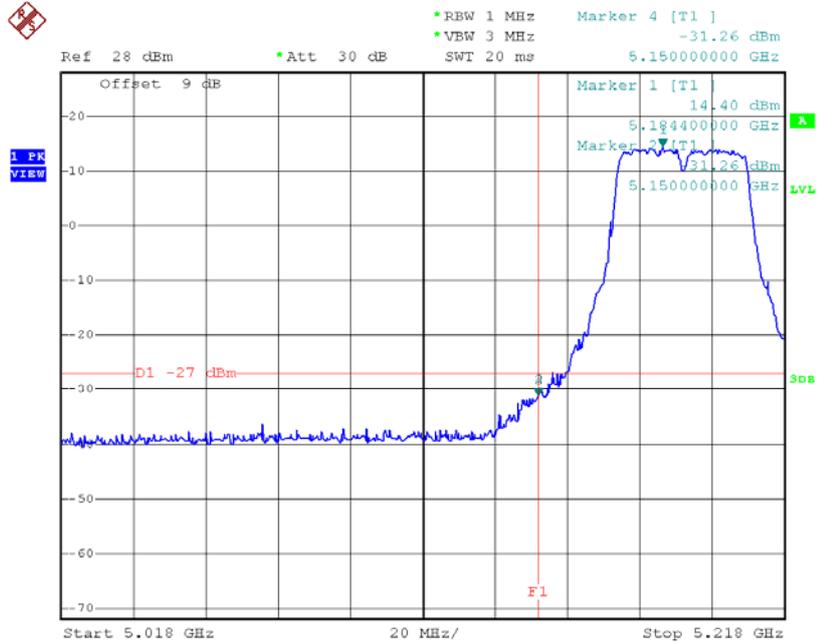

Date: 3.APR.2015 16:06:26


TX mode CH46

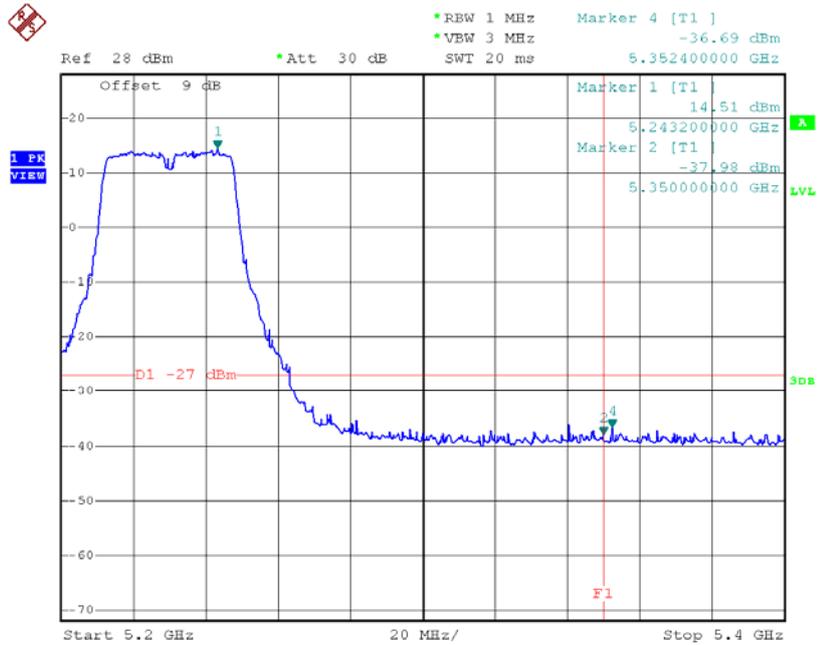

Date: 3.APR.2015 16:07:31


Test Mode: UNII-2A/TX A Mode

TX mode CH52

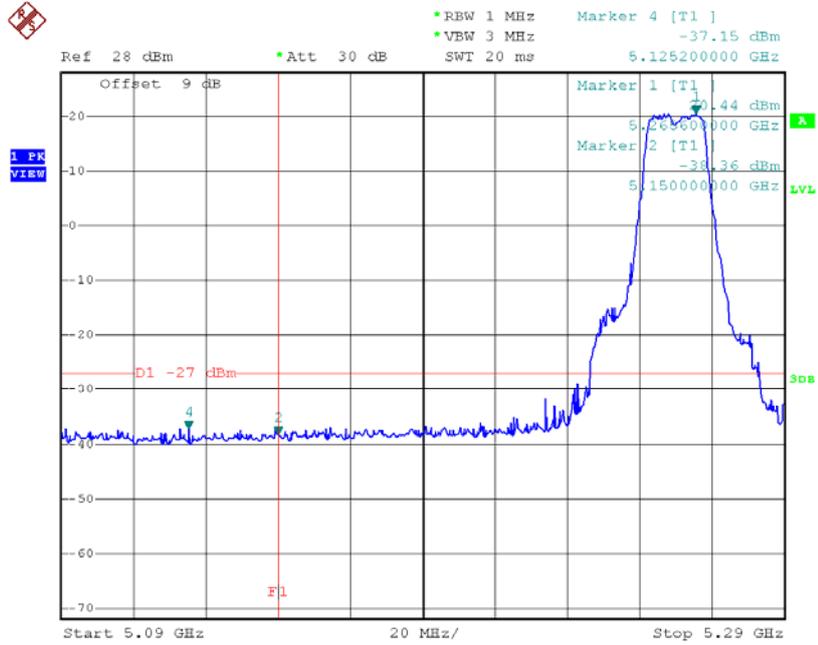

Date: 3.APR.2015 15:37:42


TX mode CH64

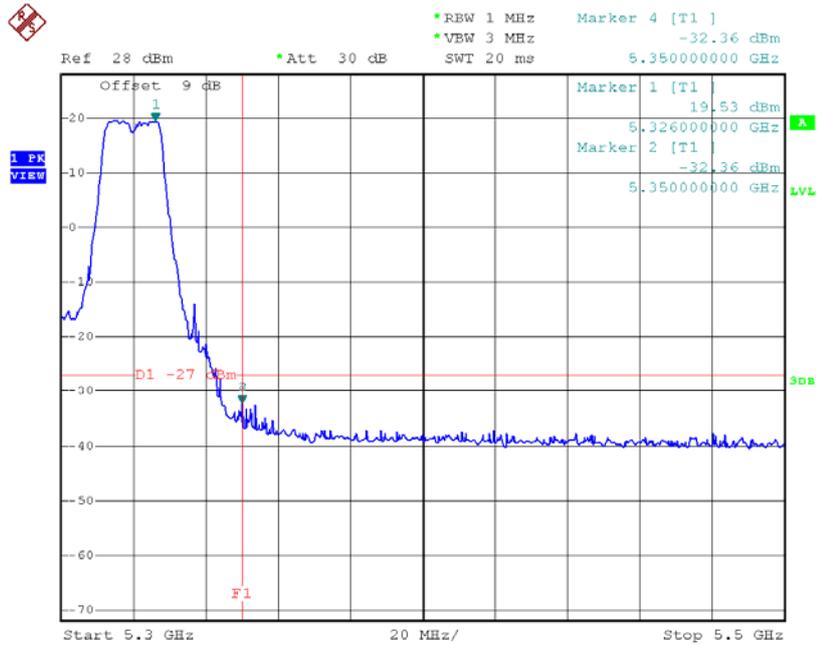

Date: 3.APR.2015 15:40:12


Test Mode: UNII-2A/TX N20 Mode

TX mode CH52

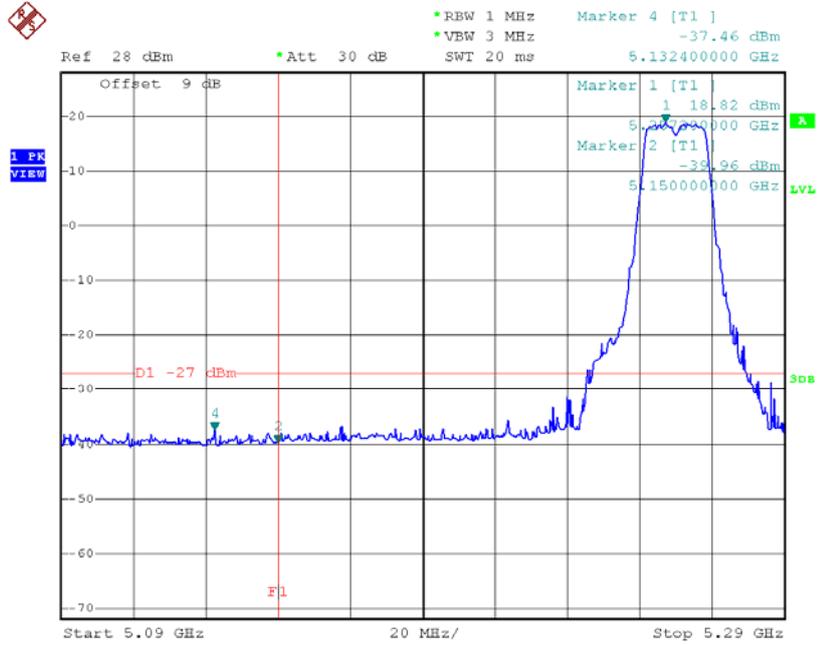

Date: 3.APR.2015 15:51:08


TX mode CH64

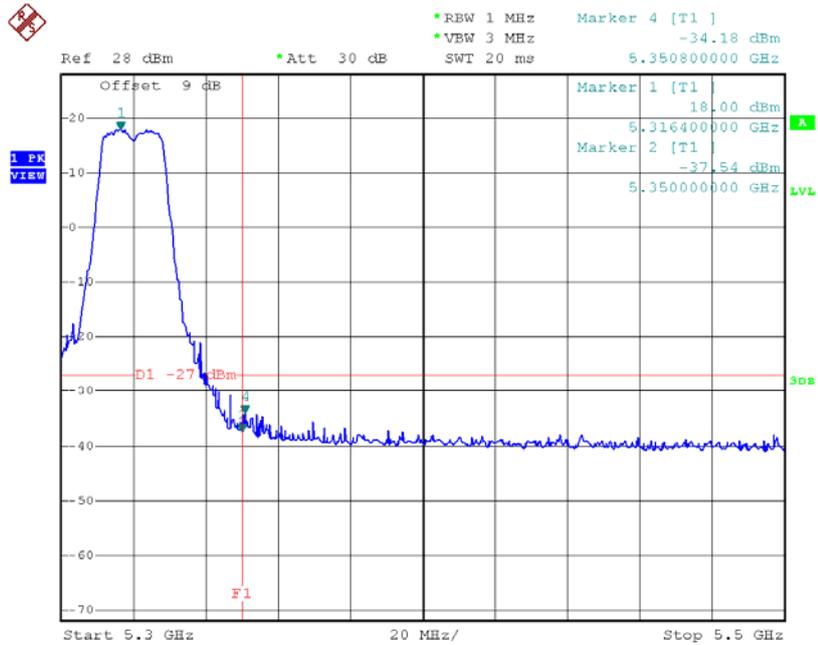

Date: 3.APR.2015 15:52:17


Test Mode: UNII-2A/TX N40 Mode

TX mode CH54

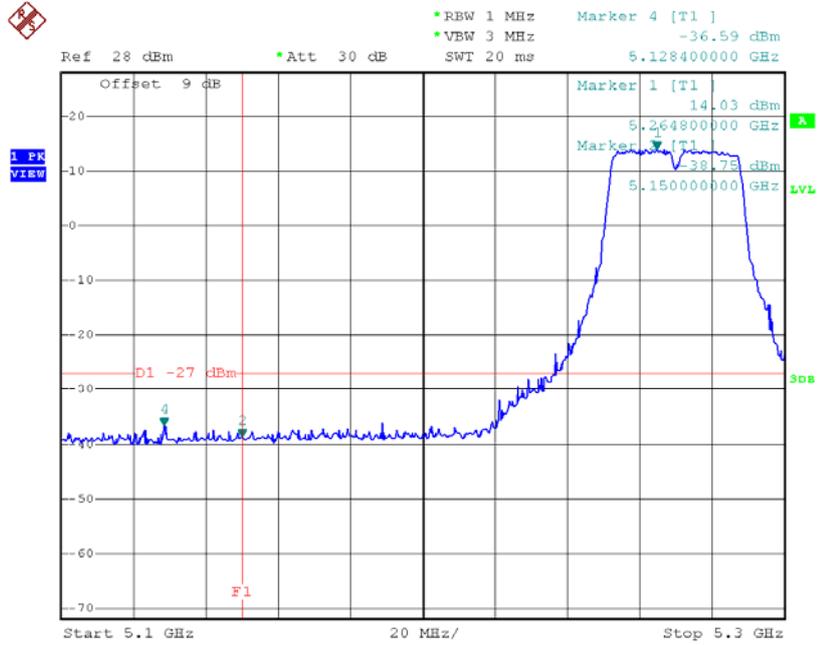

Date: 3.APR.2015 16:08:10


TX mode CH62

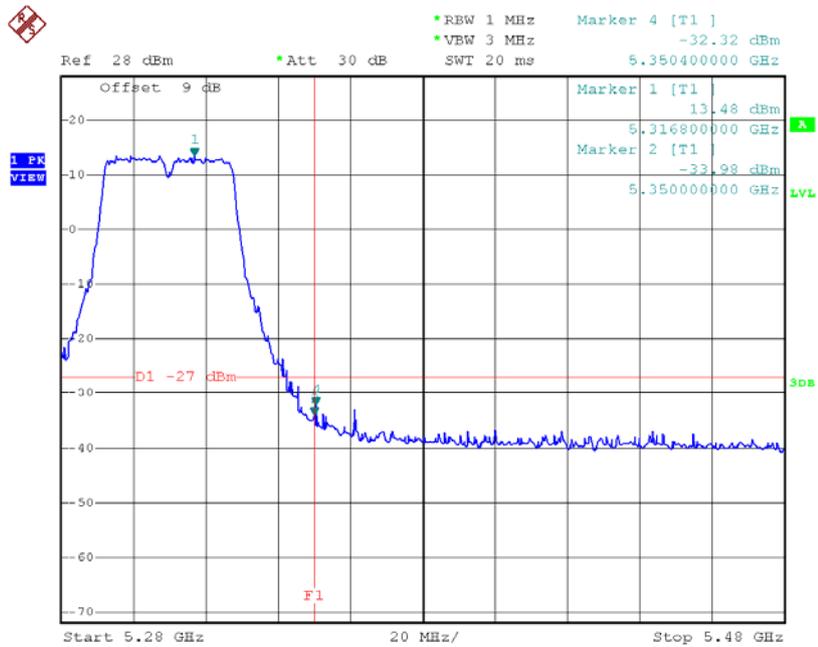

Date: 3.APR.2015 16:09:16


Test Mode: UNII-2C/TX A Mode

TX mode CH100

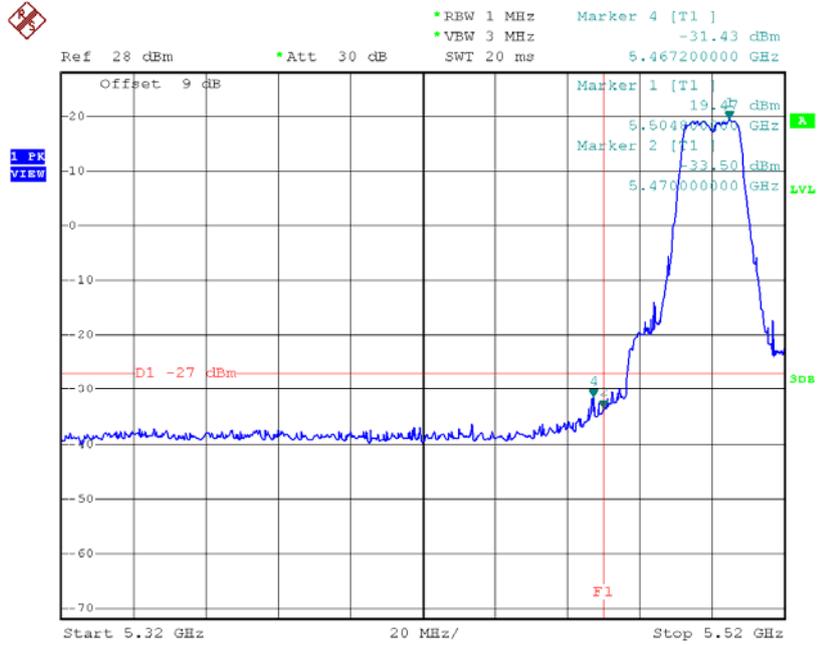

Date: 3.APR.2015 15:41:09


TX mode CH140

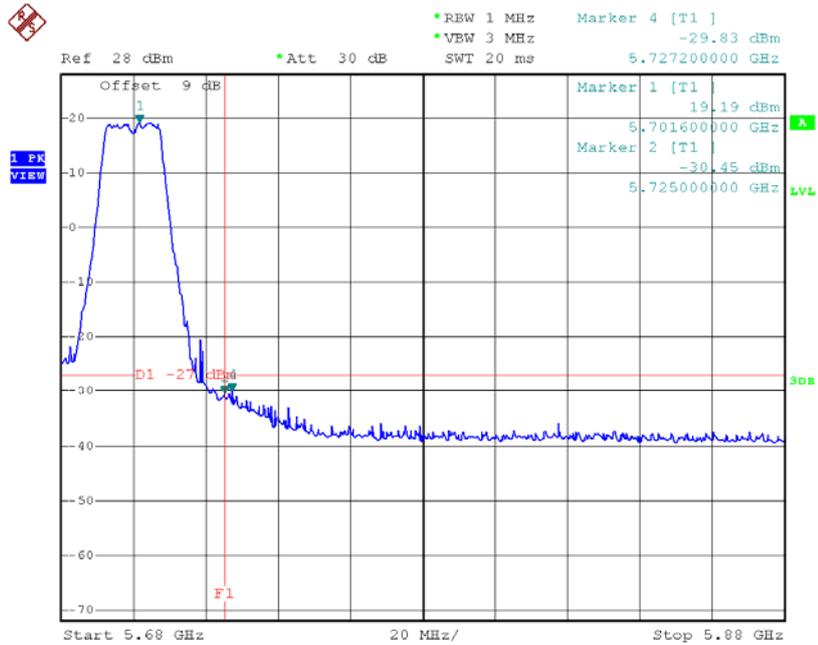

Date: 3.APR.2015 15:43:25


Test Mode: UNII-2C/TX N20 Mode

TX mode CH100

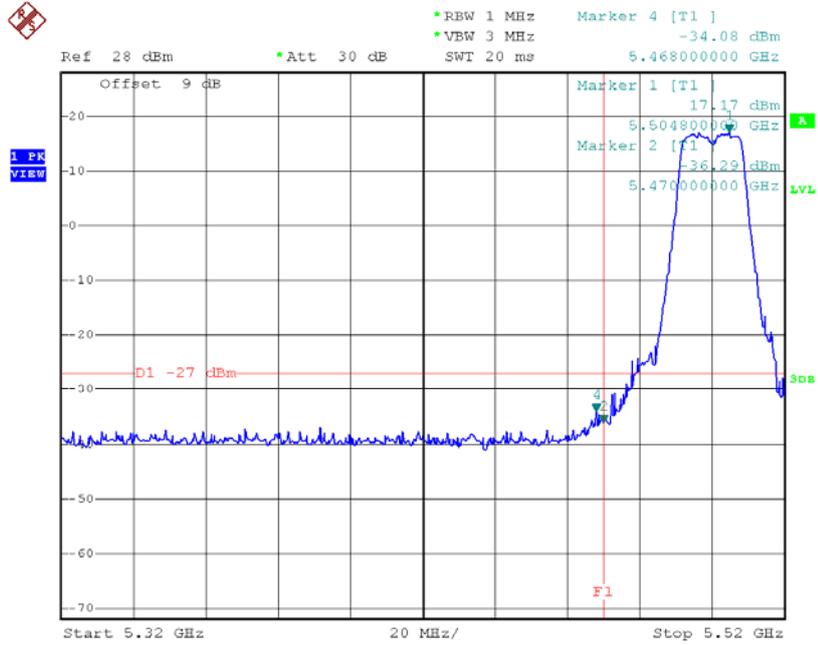

Date: 3.APR.2015 15:53:16


TX mode CH140

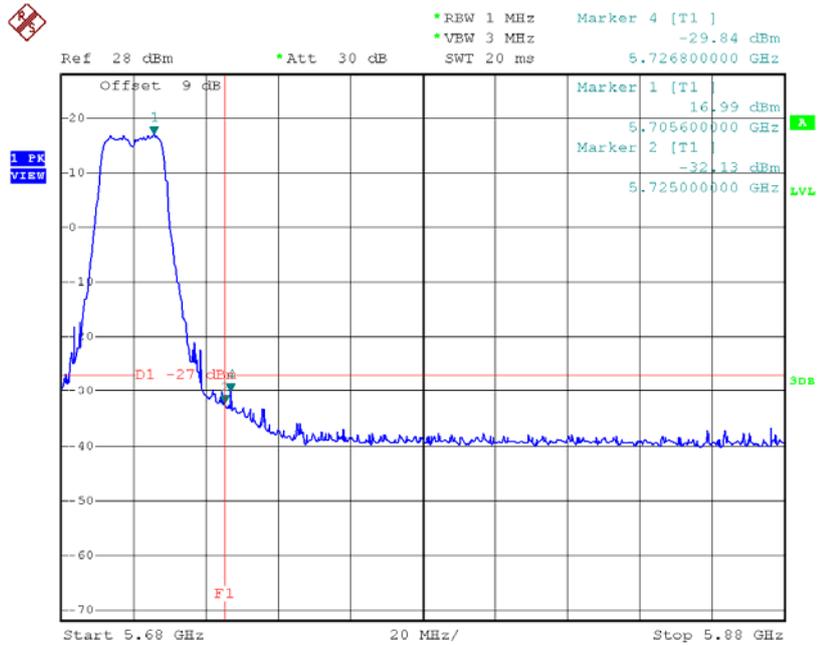

Date: 3.APR.2015 15:54:25


Test Mode: UNII-2C/TX N40 Mode

TX mode CH102

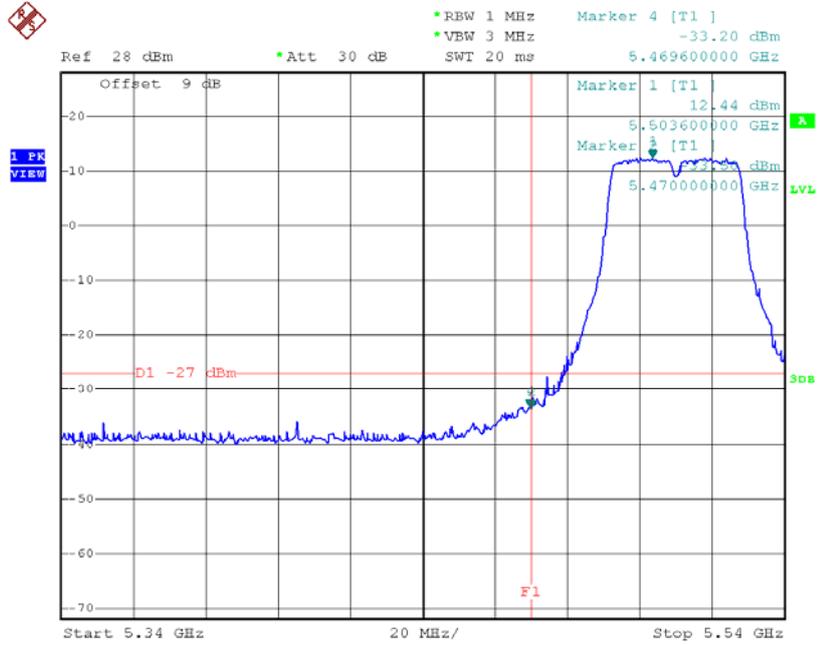

Date: 3.APR.2015 16:10:05


TX mode CH134

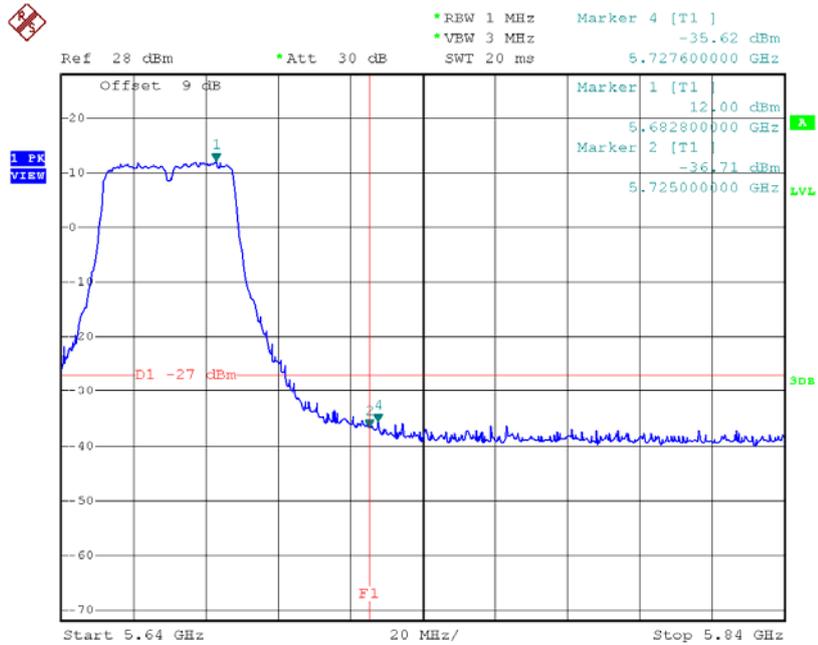

Date: 3.APR.2015 16:25:00


Test Mode: UNII-3/TX A Mode

TX A Mode CH149

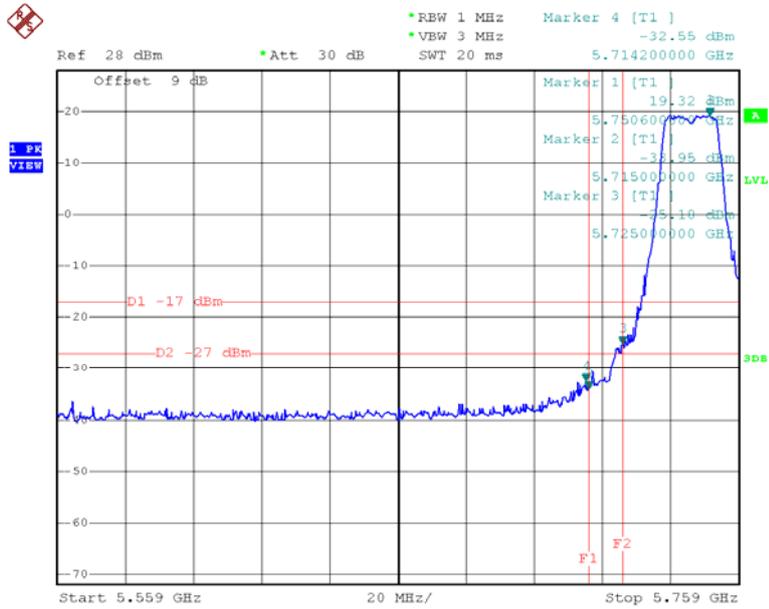

Date: 3.APR.2015 15:44:24


TX A Mode CH165

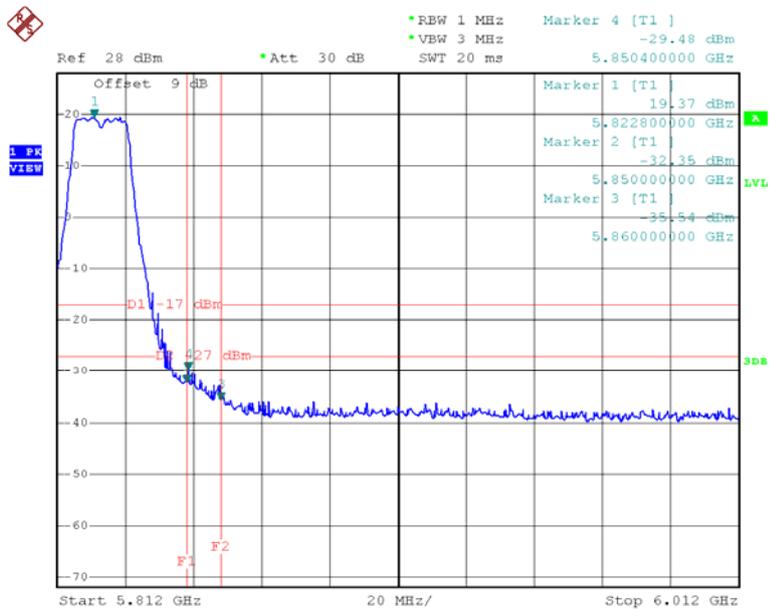

Date: 3.APR.2015 15:46:46


Test Mode: UNII-3/TX N40 Mode

UNII-3/TX HT40 mode CH151

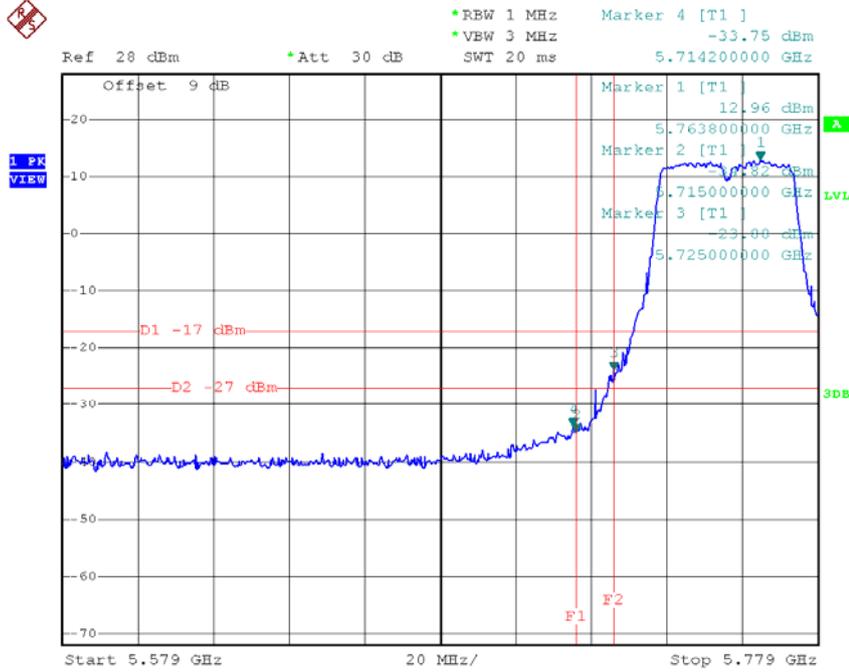

Date: 3.APR.2015 16:25:41

UNII-3/TX HT40 mode CH159

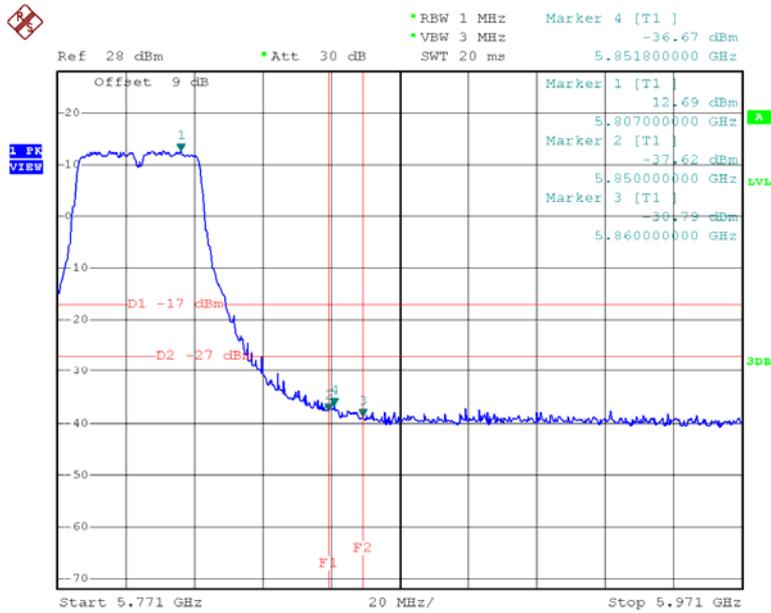

Date: 3.APR.2015 16:26:33