


FCC Test Report


FCC ID: QISATH-UL06

Project No. : 1507C127
Equipment : Smart Phone
Model Name : HUAWEI ATH-UL06, ATH-UL06
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Jul. 10, 2015
Date of Test : Jul. 10, 2015 ~ Jul. 31, 2015
Issued Date : Aug. 03, 2015
Tested by : BTL Inc.

Testing Engineer : 
(Pike Lee)

Technical Manager : 
(Jeff Yang)

Authorized Signatory : 
(Andy Chiu)

B T L I N C .

B1, No. 37, Lane 365, Yang-Guang St.,
Nei-Hu District, Taipei City 114, Taiwan.
TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30 TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
5 . MEASUREMENT INSTRUMENTS LIST	18
6 . EUT TEST PHOTO	19
ATTACHMENT A - CONDUCTED EMISSION	25
ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)	48
ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)	71

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1507C127	Original Issue.	Aug. 03, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : HUAWEI
Model Name : HUAWEI ATH-UL06, ATH-UL06
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Date of Test : Jul. 10, 2015 ~ Jul. 31, 2015
Standard(s) : FCC Part 15, Subpart B:2014
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1507C127) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B:2014 ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) " N/A" denotes test is not applicable in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of B1, No. 37, Lane 365, Yang-Guang St., Nei-Hu District, Taipei City 114, Taiwan.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. Conducted Measurement :

Test Site	Measurement Frequency Range	U , (dB)	NOTE
C02	150 kHz ~ 30 MHz	2.59	

B. Radiated Measurement :

Test Site	Item	Measurement Frequency Range	Uncertainty	NOTE	
CB08 966	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB	
			200 - 1000MHz	3.11 dB	
			1 - 18GHz	3.97 dB	
			18 - 40GHz	4.01 dB	
		Vertical Polarization	30 - 200MHz	3.22 dB	
			200 - 1000MHz	3.24 dB	
			1 - 18GHz	4.05 dB	
			18 - 40GHz	4.04 dB	

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	HUAWEI
Model Name	HUAWEI ATH-UL06, ATH-UL06
Model Difference	Only differ in model name.
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) Shenzhen Huntkey Power Technology Co.,Ltd. (2) Huizhou BYD Electronic Co., Ltd. (3) Dongguan Phltek Electronics Co., Ltd Model: HW-050200U01 (US) Model: HW-050200E01 (EU) Model: HW-050200B01 (UK) Model: HW-050200A01 (AU) #2 Supplied from battery. Manufacturer: Huawei Technologies Co., Ltd. Battery Model: HB4242B4EBW
Power Rating	#1 I/P: ~100-240V 50/60Hz ,0.5A O/P: 5V == 2A #2 DC 3.8V 3000mAh
S/N	CED0115525000317
HW Version	HL1ATHUL06M
SW Version	ATH-UL06C00B030

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The maximum operating frequency is 4GHz
3. Product Function and Intended Use

Mode		Work Frequency	
		Transmitt Frequency (MHz)	Receive Frequency (MHz)
GSM	GSM 850	824 - 849	869 - 894
	PCS1900	1850-1910	1930-1990
WCDMA850		824 - 849	869 - 894
WCDMA1700		1710-1755	2110-2155
WCDMA1900		1850-1910	1930-1990
LTE B2		1850-1910	1930-1990
LTE B4		1710-1755	2110-2170
LTE B5		824 - 849	869 - 894
LTE B7		2500 -2570	2620 -2690
Bluetooth		2402-2480	
Wi-Fi		2412-2462	
GPS		1575.42	

4. Data cable:

- #1 Manufacturer: Shen Zhen Pang Ngai Industrial Co.,Ltd. / Model: H09-000577
- #2 Manufacturer: Unirise Communication Technology Co., Ltd. / Model: LSA00732
- #3 Manufacturer: Connrex(Shen Zhen) Industrial ,Ltd. / Model: CD-U0405-1143

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	USB Copy(EUT with PC) +Earphone+idle

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	USB Copy(EUT with PC) +Earphone+idle

For Radiated Test	
Final Test Mode	Description
Mode 1	Adapter+camera on+idle+wifi+bt+gps+Earphone
Mode 2	Adapter+Playing+idle+speaker
Mode 3	Adapter+ Traffic (GSM)+ Earphone
Mode 4	Adapter+ Traffic (WCDMA)
Mode 5	Adapter+ Traffic (LTE)
Mode 6	USB Copy(EUT with PC) +Earphone+idle

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

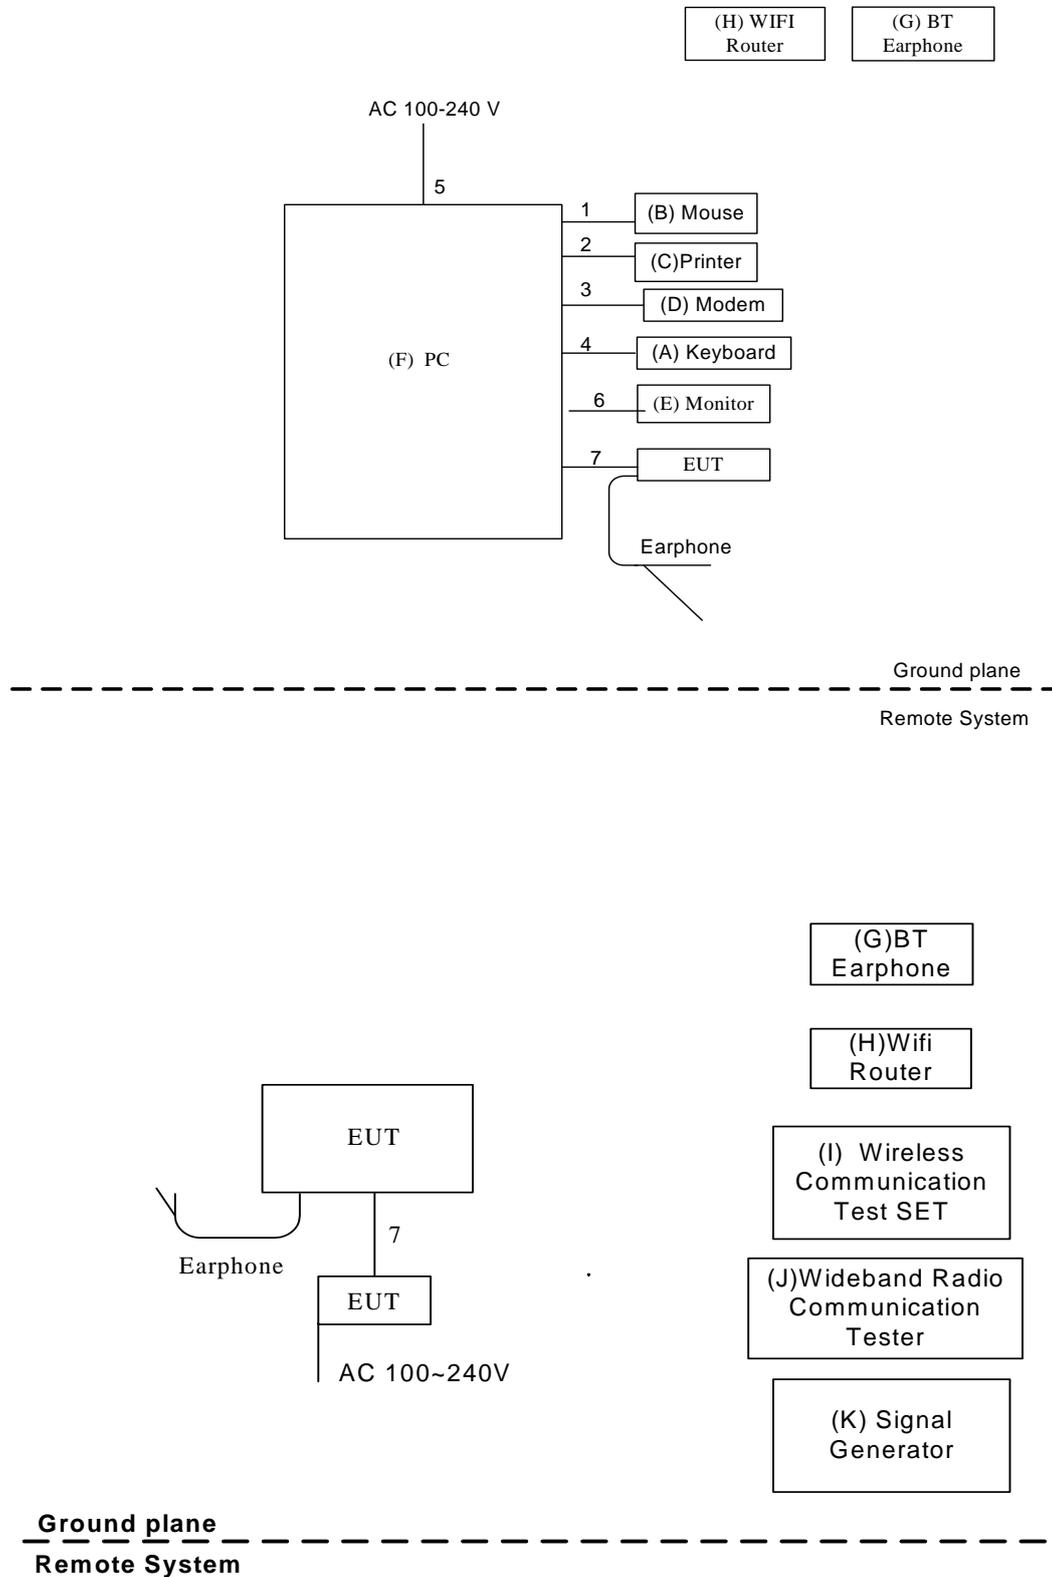

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
A	USB keyboard	hp	SK-2885	DOC	N/A	
B	USB Mouse	hp	SM-2020	DOC	N/A	
C	Printer	SII	DPU-414	DOC	3018507 B	
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131	
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-6418 0-6AG-1WNS	
F	PC	Dell	DCSM	DOC	G7K832X	
G	Router	TP-LINK	TL-WR1041N	N/A	N/A	
H	BT Earphone	N/A	N/A	N/A	N/A	
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183	
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125	
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316	

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1.0m	USB Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.0	66 - 56	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

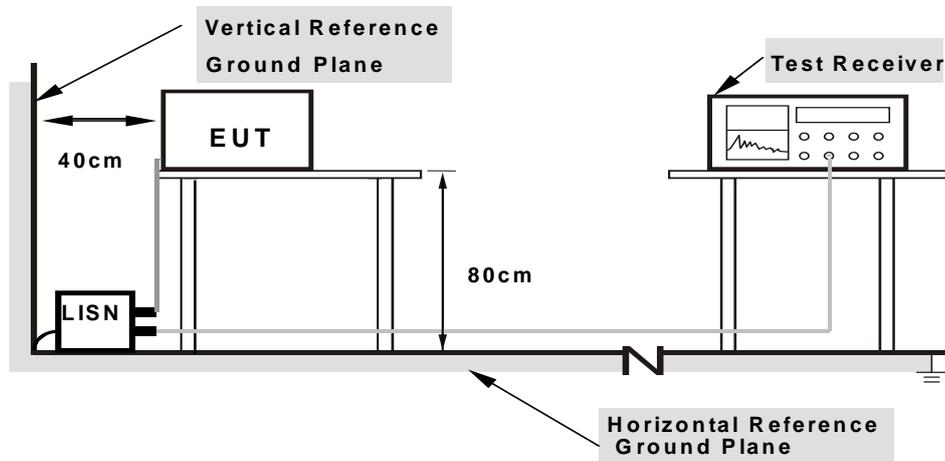

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25° C Relative Humidity: 51%

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following: FCC Part 15, Subpart B: 2014;.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of at 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting conducted emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

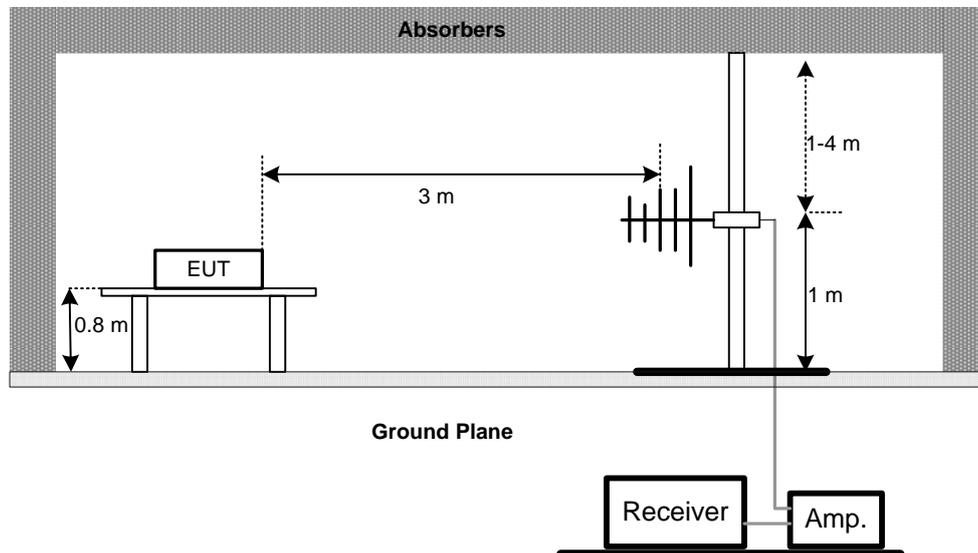

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

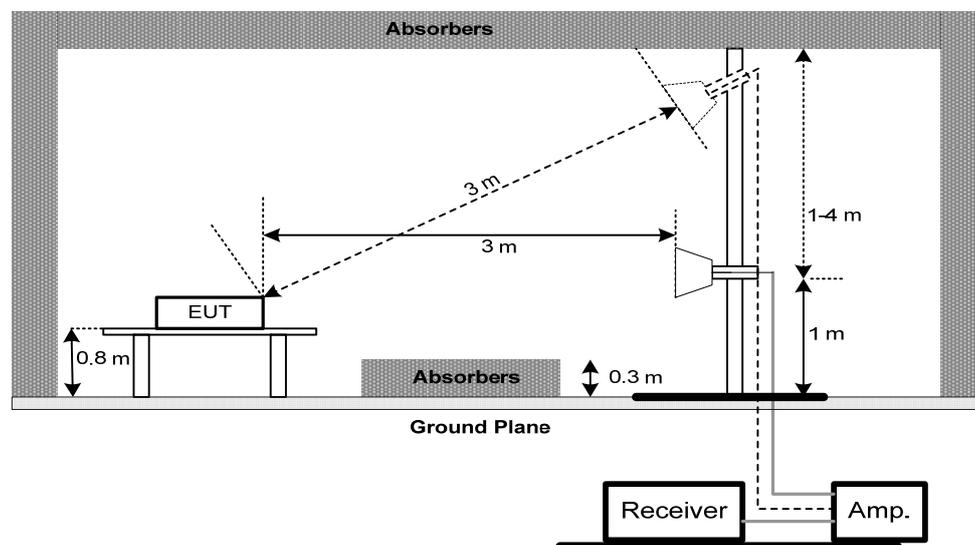

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS (30 TO 1000 MHZ)

Please refer to the Attachment B.

Temperature: 25°C Relative Humidity: 60%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

4.2.7 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment C

Temperature: 25°C Relative Humidity: 60%

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 22, 2015
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ_EMCC (Version NB-03A)	N/A	N/A


Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 13, 2015
12	Measurement Software	EZ	EZ_EMCC (Version NB-03A)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of Equipment List is One Year.

ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Line

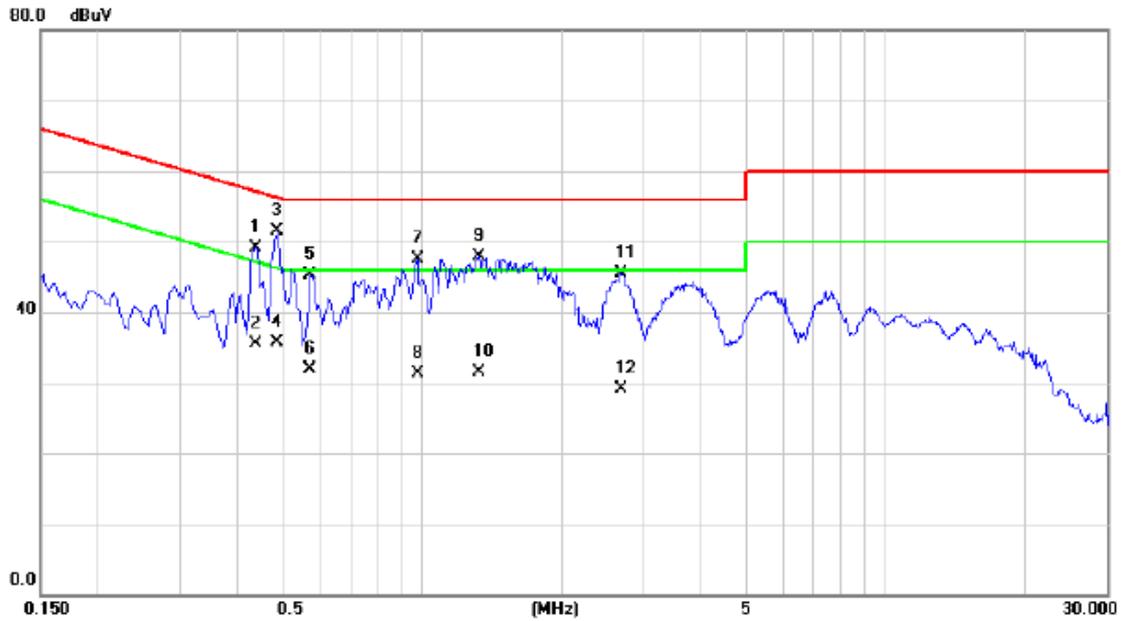

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4380	39.39	9.81	49.20	57.10	-7.90	QP	
2		0.4380	25.60	9.81	35.41	47.10	-11.69	AVG	
3	*	0.4874	41.73	9.82	51.55	56.21	-4.66	QP	
4		0.4874	25.90	9.82	35.72	46.21	-10.49	AVG	
5		0.5730	35.46	9.84	45.30	56.00	-10.70	QP	
6		0.5730	22.10	9.84	31.94	46.00	-14.06	AVG	
7		0.9757	37.44	9.98	47.42	56.00	-8.58	QP	
8		0.9757	21.40	9.98	31.38	46.00	-14.62	AVG	
9		1.3223	37.84	9.99	47.83	56.00	-8.17	QP	
10		1.3223	21.60	9.99	31.59	46.00	-14.41	AVG	
11		2.6835	35.63	9.90	45.53	56.00	-10.47	QP	
12		2.6835	19.30	9.90	29.20	46.00	-16.80	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Neutral

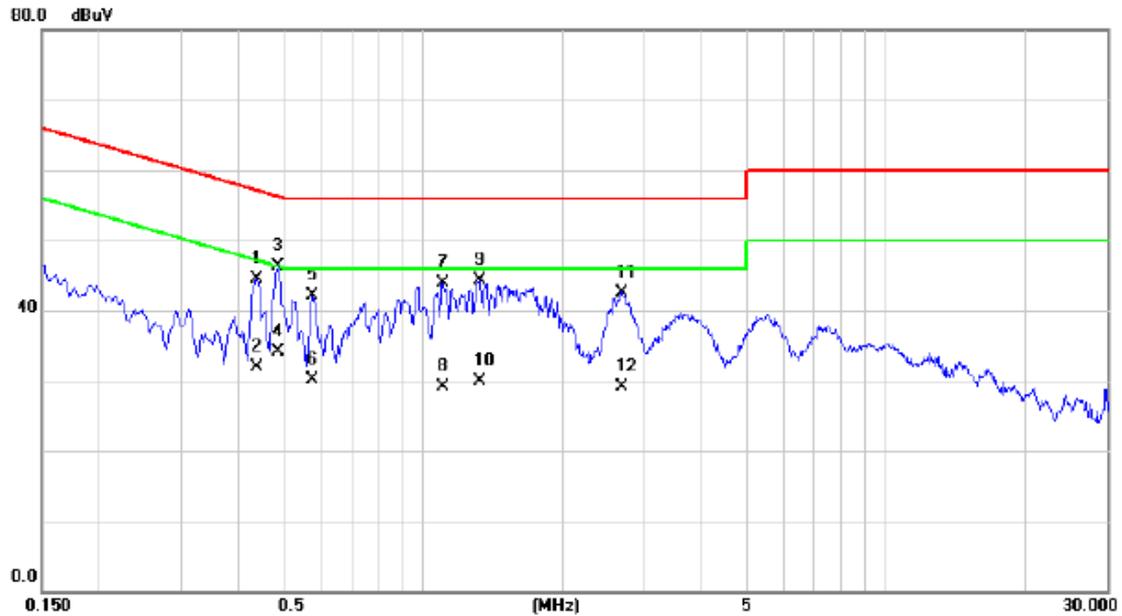

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4380	34.81	9.64	44.45	57.10	-12.65	QP	
2		0.4380	22.30	9.64	31.94	47.10	-15.16	AVG	
3	*	0.4875	36.69	9.65	46.34	56.21	-9.87	QP	
4		0.4875	24.50	9.65	34.15	46.21	-12.06	AVG	
5		0.5775	32.34	9.67	42.01	56.00	-13.99	QP	
6		0.5775	20.40	9.67	30.07	46.00	-15.93	AVG	
7		1.1017	34.18	9.80	43.98	56.00	-12.02	QP	
8		1.1017	19.30	9.80	29.10	46.00	-16.90	AVG	
9		1.3223	34.53	9.81	44.34	56.00	-11.66	QP	
10		1.3223	20.10	9.81	29.91	46.00	-16.09	AVG	
11		2.6835	32.76	9.84	42.60	56.00	-13.40	QP	
12		2.6835	19.20	9.84	29.04	46.00	-16.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Line

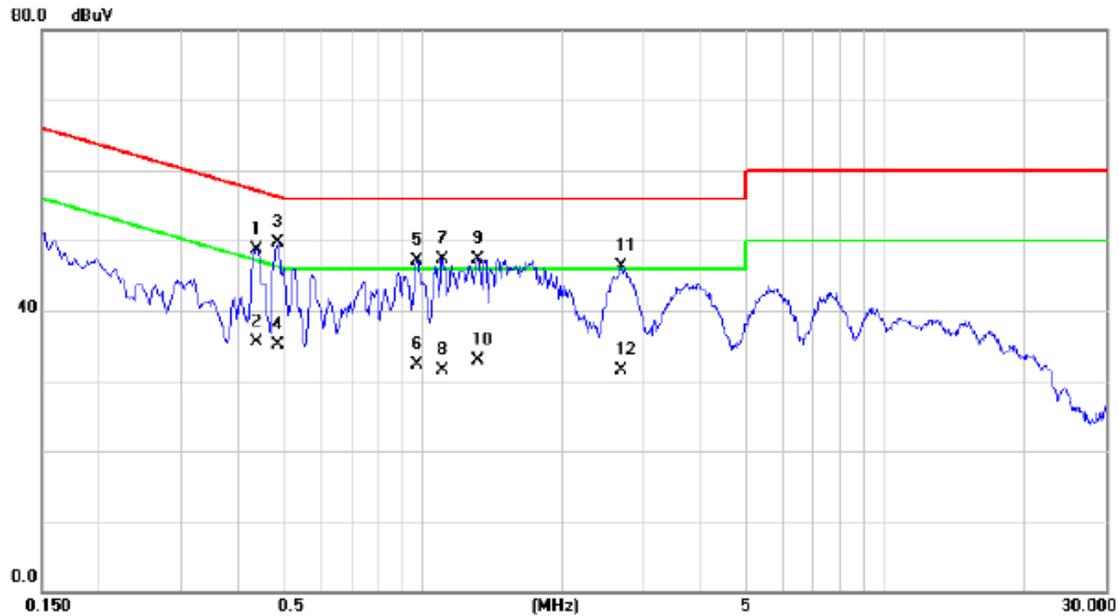

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4380	38.98	9.81	48.79	57.10	-8.31	QP	
2		0.4380	25.70	9.81	35.51	47.10	-11.59	AVG	
3	*	0.4874	39.98	9.82	49.80	56.21	-6.41	QP	
4		0.4874	25.30	9.82	35.12	46.21	-11.09	AVG	
5		0.9712	37.11	9.97	47.08	56.00	-8.92	QP	
6		0.9712	22.40	9.97	32.37	46.00	-13.63	AVG	
7		1.1040	37.29	10.00	47.29	56.00	-8.71	QP	
8		1.1040	21.60	10.00	31.60	46.00	-14.40	AVG	
9		1.3177	37.24	9.99	47.23	56.00	-8.77	QP	
10		1.3177	22.90	9.99	32.89	46.00	-13.11	AVG	
11		2.6857	36.40	9.90	46.30	56.00	-9.70	QP	
12		2.6857	21.60	9.90	31.50	46.00	-14.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Neutral

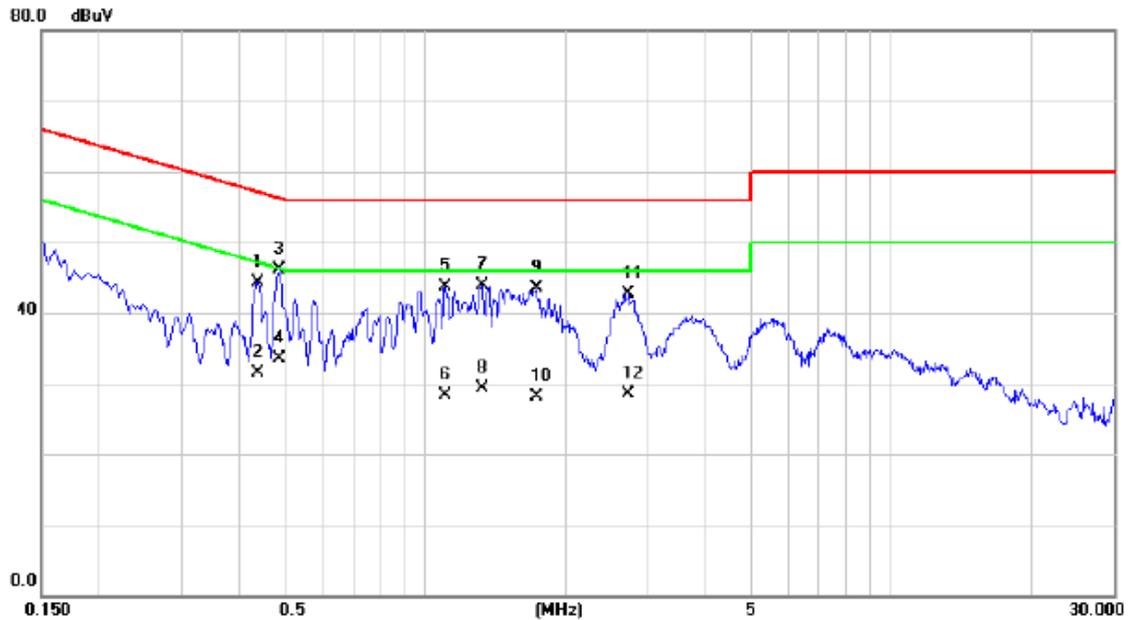

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4380	34.65	9.64	44.29	57.10	-12.81	QP	
2		0.4380	21.90	9.64	31.54	47.10	-15.56	AVG	
3	*	0.4874	36.44	9.65	46.09	56.21	-10.12	QP	
4		0.4874	23.80	9.65	33.45	46.21	-12.76	AVG	
5		1.1017	33.87	9.80	43.67	56.00	-12.33	QP	
6		1.1017	18.60	9.80	28.40	46.00	-17.60	AVG	
7		1.3222	34.12	9.81	43.93	56.00	-12.07	QP	
8		1.3222	19.40	9.81	29.21	46.00	-16.79	AVG	
9		1.7340	33.61	9.87	43.48	56.00	-12.52	QP	
10		1.7340	18.30	9.87	28.17	46.00	-17.83	AVG	
11		2.7217	32.87	9.84	42.71	56.00	-13.29	QP	
12		2.7217	18.70	9.84	28.54	46.00	-17.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Line

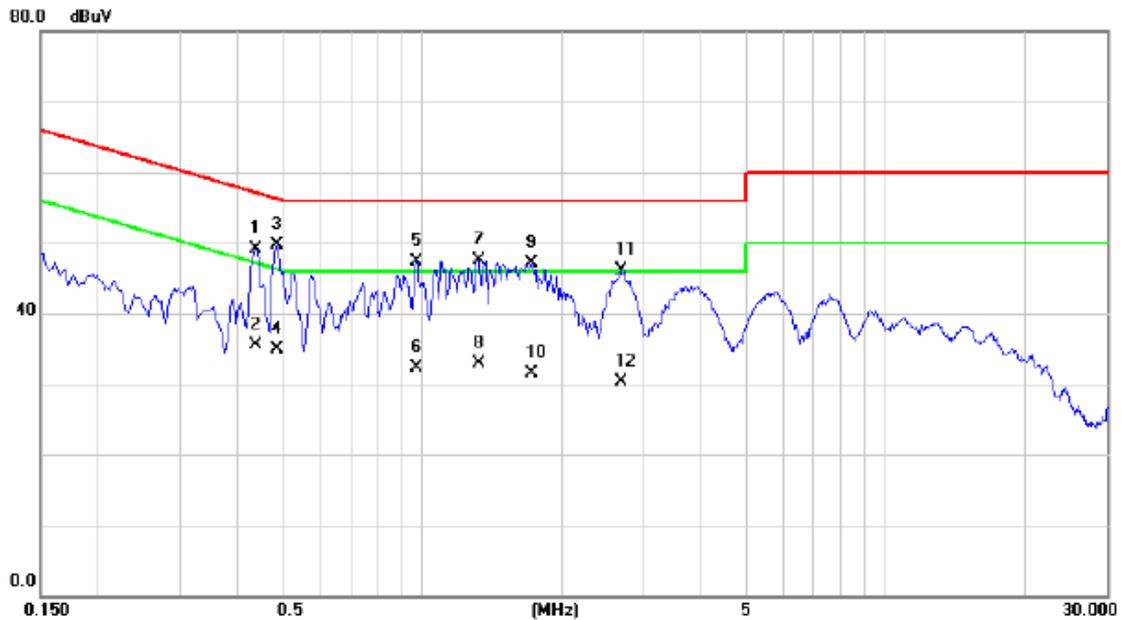

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4380	39.25	9.81	49.06	57.10	-8.04	QP	
2	0.4380	25.70	9.81	35.51	47.10	-11.59	AVG	
3 *	0.4874	39.97	9.82	49.79	56.21	-6.42	QP	
4	0.4874	25.10	9.82	34.92	46.21	-11.29	AVG	
5	0.9734	37.26	9.97	47.23	56.00	-8.77	QP	
6	0.9734	22.30	9.97	32.27	46.00	-13.73	AVG	
7	1.3222	37.51	9.99	47.50	56.00	-8.50	QP	
8	1.3222	22.90	9.99	32.89	46.00	-13.11	AVG	
9	1.7250	37.26	9.89	47.15	56.00	-8.85	QP	
10	1.7250	21.60	9.89	31.49	46.00	-14.51	AVG	
11	2.6835	36.22	9.90	46.12	56.00	-9.88	QP	
12	2.6835	20.40	9.90	30.30	46.00	-15.70	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Neutral

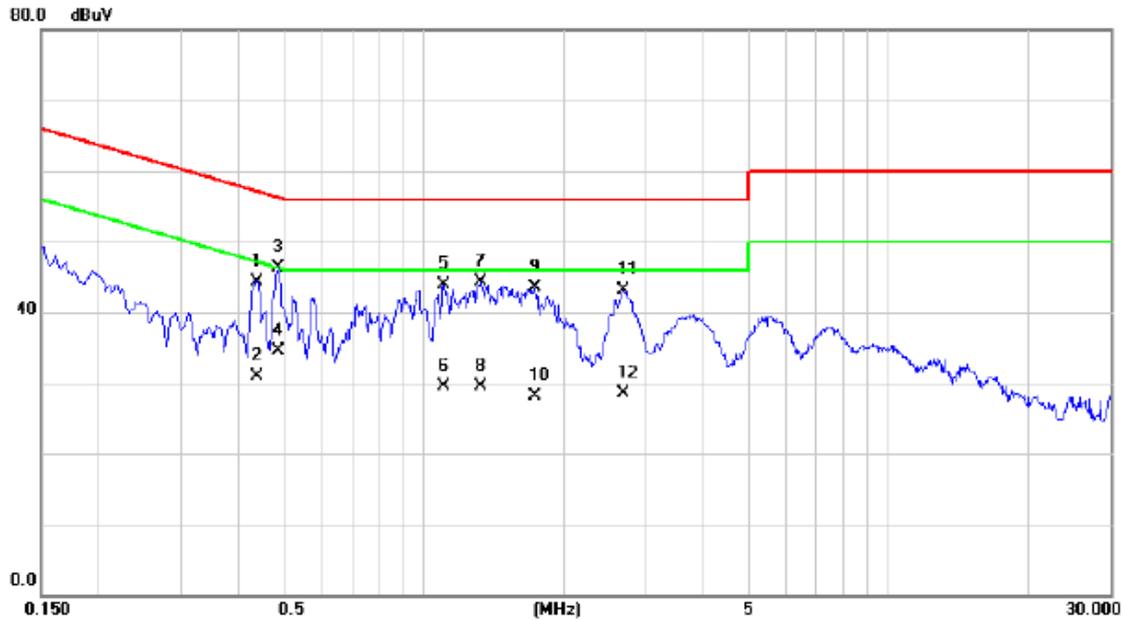

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.4380	34.76	9.64	44.40	57.10	-12.70	QP	
2	0.4380	21.30	9.64	30.94	47.10	-16.16	AVG	
3 *	0.4874	36.58	9.65	46.23	56.21	-9.98	QP	
4	0.4874	24.80	9.65	34.45	46.21	-11.76	AVG	
5	1.1062	34.03	9.80	43.83	56.00	-12.17	QP	
6	1.1062	19.70	9.80	29.50	46.00	-16.50	AVG	
7	1.3266	34.45	9.81	44.26	56.00	-11.74	QP	
8	1.3266	19.60	9.81	29.41	46.00	-16.59	AVG	
9	1.7340	33.73	9.87	43.60	56.00	-12.40	QP	
10	1.7340	18.20	9.87	28.07	46.00	-17.93	AVG	
11	2.6902	33.22	9.84	43.06	56.00	-12.94	QP	
12	2.6902	18.70	9.84	28.54	46.00	-17.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Line

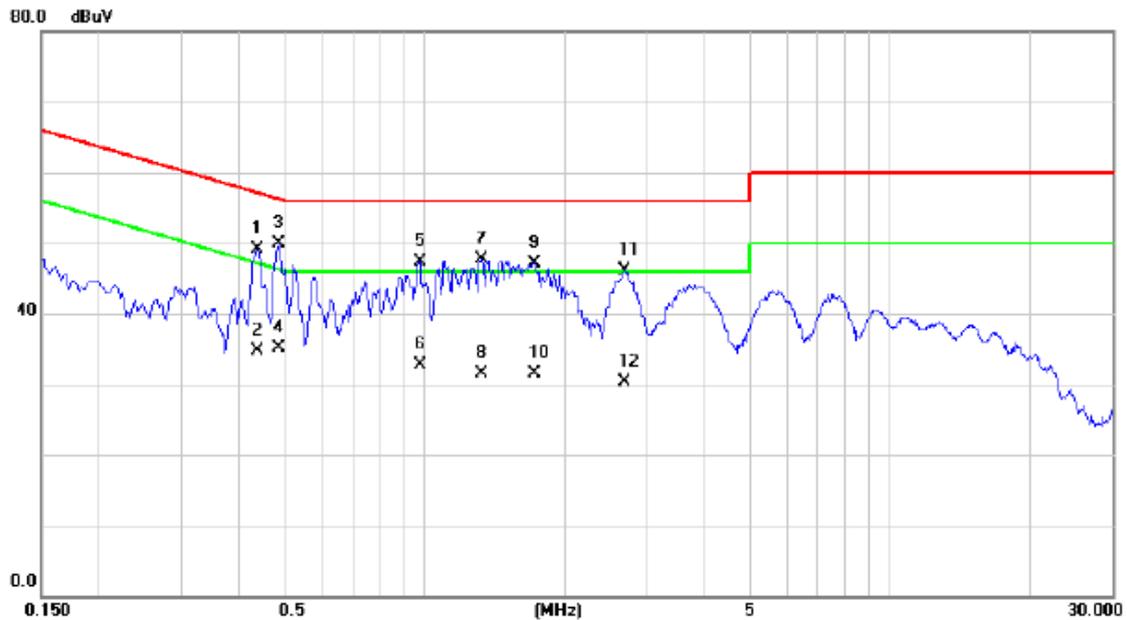

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4380	39.21	9.81	49.02	57.10	-8.08	QP	
2		0.4380	24.90	9.81	34.71	47.10	-12.39	AVG	
3	*	0.4874	40.11	9.82	49.93	56.21	-6.28	QP	
4		0.4874	25.30	9.82	35.12	46.21	-11.09	AVG	
5		0.9757	37.41	9.98	47.39	56.00	-8.61	QP	
6		0.9757	22.80	9.98	32.78	46.00	-13.22	AVG	
7		1.3222	37.68	9.99	47.67	56.00	-8.33	QP	
8		1.3222	21.60	9.99	31.59	46.00	-14.41	AVG	
9		1.7272	37.30	9.89	47.19	56.00	-8.81	QP	
10		1.7272	21.70	9.89	31.59	46.00	-14.41	AVG	
11		2.6902	36.19	9.90	46.09	56.00	-9.91	QP	
12		2.6902	20.50	9.90	30.40	46.00	-15.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Neutral

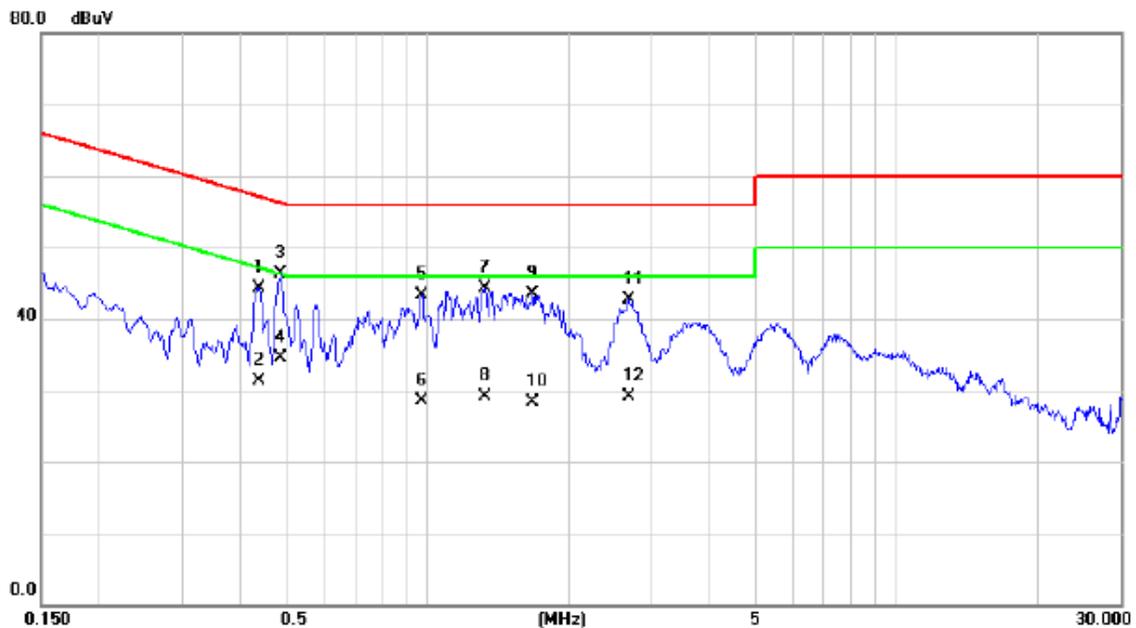

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4380	34.75	9.64	44.39	57.10	-12.71	QP	
2		0.4380	21.60	9.64	31.24	47.10	-15.86	AVG	
3	*	0.4874	36.64	9.65	46.29	56.21	-9.92	QP	
4		0.4874	24.80	9.65	34.45	46.21	-11.76	AVG	
5		0.9734	33.51	9.77	43.28	56.00	-12.72	QP	
6		0.9734	18.70	9.77	28.47	46.00	-17.53	AVG	
7		1.3245	34.45	9.81	44.26	56.00	-11.74	QP	
8		1.3245	19.30	9.81	29.11	46.00	-16.89	AVG	
9		1.6755	33.56	9.86	43.42	56.00	-12.58	QP	
10		1.6755	18.50	9.86	28.36	46.00	-17.64	AVG	
11		2.6880	32.80	9.84	42.64	56.00	-13.36	QP	
12		2.6880	19.30	9.84	29.14	46.00	-16.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Line

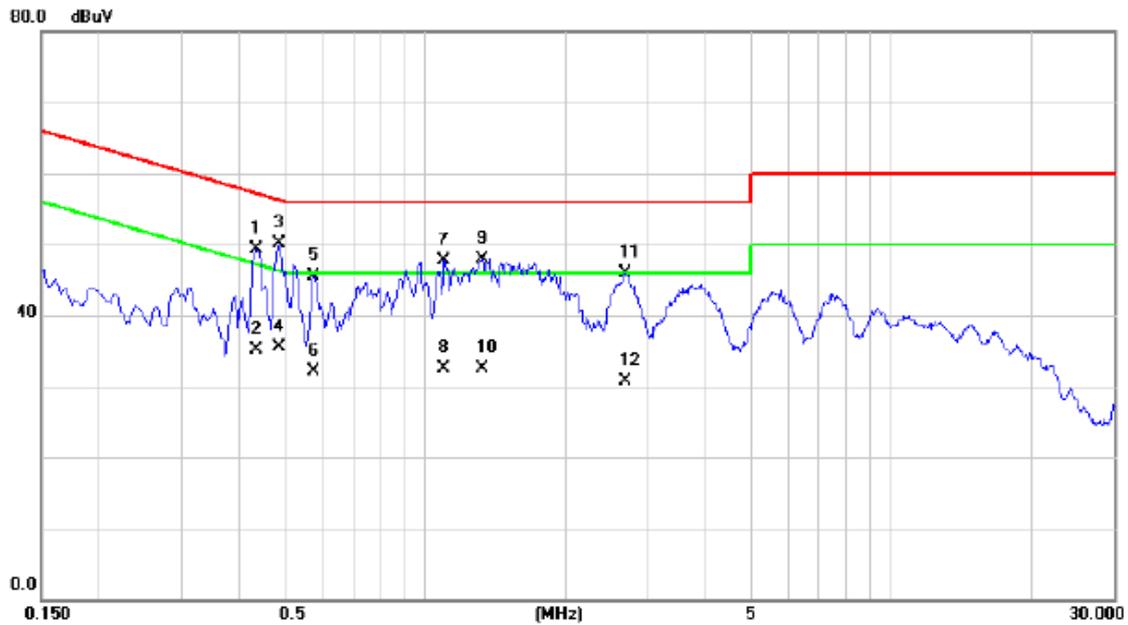

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4357	39.47	9.81	49.28	57.14	-7.86	QP	
2		0.4357	25.20	9.81	35.01	47.14	-12.13	AVG	
3	*	0.4875	40.32	9.82	50.14	56.21	-6.07	QP	
4		0.4875	25.70	9.82	35.52	46.21	-10.69	AVG	
5		0.5775	35.57	9.85	45.42	56.00	-10.58	QP	
6		0.5775	22.30	9.85	32.15	46.00	-13.85	AVG	
7		1.0995	37.71	10.00	47.71	56.00	-8.29	QP	
8		1.0995	22.50	10.00	32.50	46.00	-13.50	AVG	
9		1.3223	38.00	9.99	47.99	56.00	-8.01	QP	
10		1.3223	22.60	9.99	32.59	46.00	-13.41	AVG	
11		2.6813	36.07	9.90	45.97	56.00	-10.03	QP	
12		2.6813	20.80	9.90	30.70	46.00	-15.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Neutral

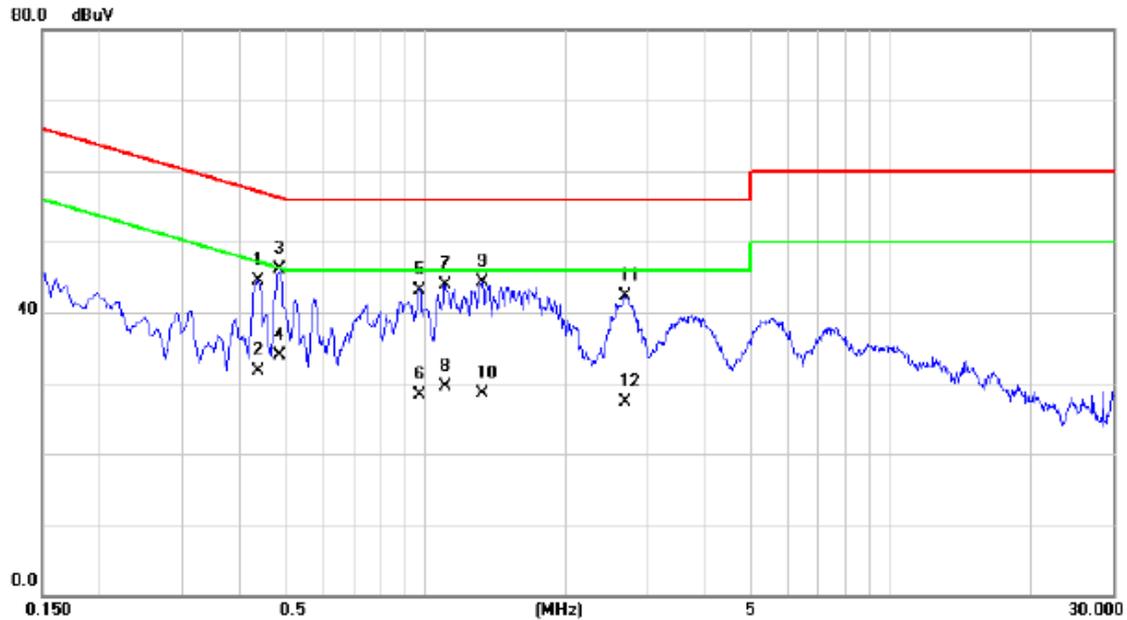

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.4380	34.86	9.64	44.50	57.10	-12.60	QP	
2	0.4380	22.10	9.64	31.74	47.10	-15.36	AVG	
3 *	0.4874	36.54	9.65	46.19	56.21	-10.02	QP	
4	0.4874	24.30	9.65	33.95	46.21	-12.26	AVG	
5	0.9712	33.43	9.77	43.20	56.00	-12.80	QP	
6	0.9712	18.60	9.77	28.37	46.00	-17.63	AVG	
7	1.1017	34.11	9.80	43.91	56.00	-12.09	QP	
8	1.1017	19.70	9.80	29.50	46.00	-16.50	AVG	
9	1.3245	34.56	9.81	44.37	56.00	-11.63	QP	
10	1.3245	18.60	9.81	28.41	46.00	-17.59	AVG	
11	2.6902	32.54	9.84	42.38	56.00	-13.62	QP	
12	2.6902	17.40	9.84	27.24	46.00	-18.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK / Pengyi USB cable / xingwangda Lithium Battery


Line

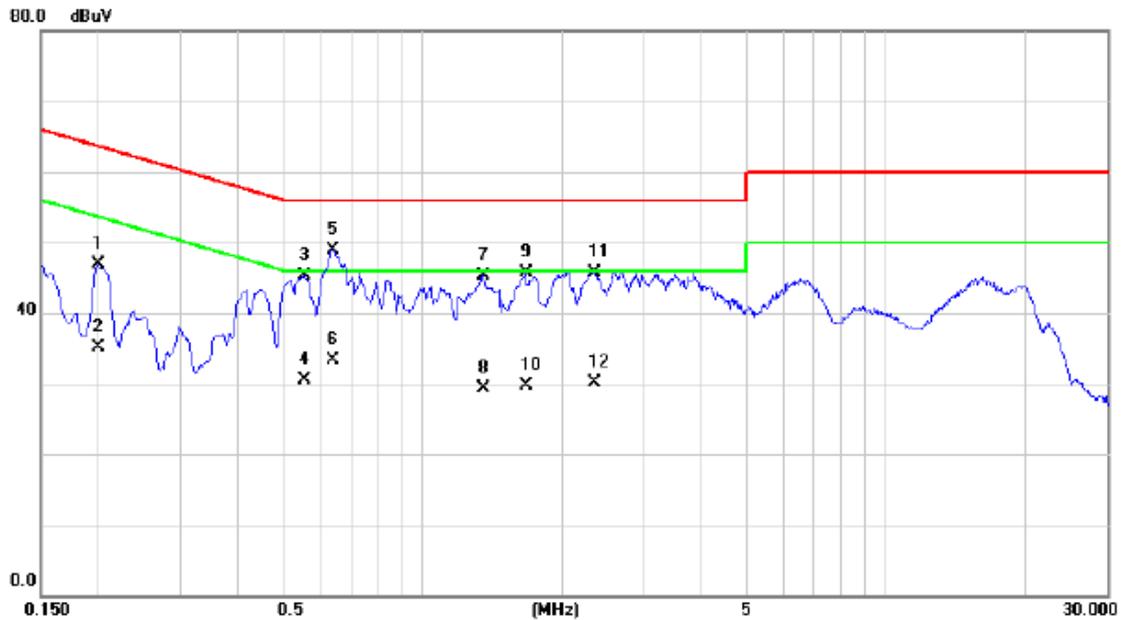

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.1995	37.18	9.71	46.89	63.63	-16.74	QP	
2	0.1995	25.40	9.71	35.11	53.63	-18.52	AVG	
3	0.5550	35.52	9.84	45.36	56.00	-10.64	QP	
4	0.5550	20.60	9.84	30.44	46.00	-15.56	AVG	
5 *	0.6405	39.10	9.87	48.97	56.00	-7.03	QP	
6	0.6405	23.50	9.87	33.37	46.00	-12.63	AVG	
7	1.3560	35.33	9.97	45.30	56.00	-10.70	QP	
8	1.3560	19.30	9.97	29.27	46.00	-16.73	AVG	
9	1.6688	35.75	9.90	45.65	56.00	-10.35	QP	
10	1.6688	19.80	9.90	29.70	46.00	-16.30	AVG	
11	2.3528	35.73	9.92	45.65	56.00	-10.35	QP	
12	2.3528	20.10	9.92	30.02	46.00	-15.98	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK / Pengyi USB cable / xingwangda Lithium Battery


Neutral

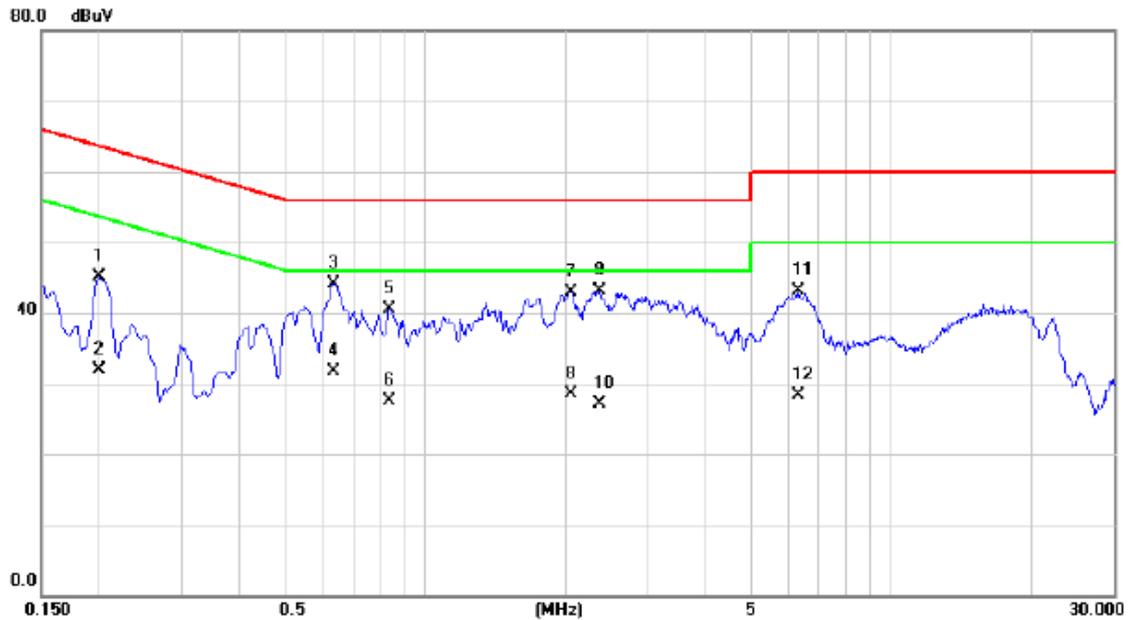

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1995	35.41	9.61	45.02	63.63	-18.61	QP	
2		0.1995	22.30	9.61	31.91	53.63	-21.72	AVG	
3	*	0.6382	34.50	9.68	44.18	56.00	-11.82	QP	
4		0.6382	22.10	9.68	31.78	46.00	-14.22	AVG	
5		0.8385	30.75	9.74	40.49	56.00	-15.51	QP	
6		0.8385	17.70	9.74	27.44	46.00	-18.56	AVG	
7		2.0535	33.02	9.92	42.94	56.00	-13.06	QP	
8		2.0535	18.50	9.92	28.42	46.00	-17.58	AVG	
9		2.3640	33.14	9.88	43.02	56.00	-12.98	QP	
10		2.3640	17.30	9.88	27.18	46.00	-18.82	AVG	
11		6.3308	32.89	10.13	43.02	60.00	-16.98	QP	
12		6.3308	18.20	10.13	28.33	50.00	-21.67	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Line

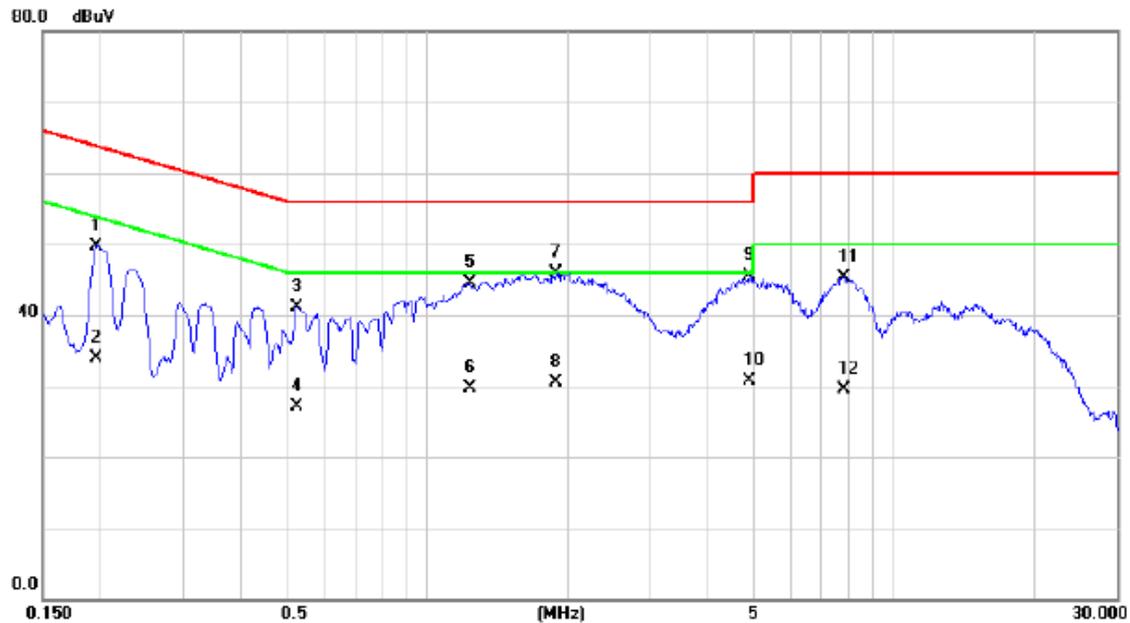

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1950	40.03	9.71	49.74	63.82	-14.08	QP	
2	0.1950	24.20	9.71	33.91	53.82	-19.91	AVG	
3	0.5257	31.30	9.83	41.13	56.00	-14.87	QP	
4	0.5257	17.30	9.83	27.13	46.00	-18.87	AVG	
5	1.2368	34.47	10.01	44.48	56.00	-11.52	QP	
6	1.2368	19.70	10.01	29.71	46.00	-16.29	AVG	
7 *	1.8938	36.09	9.87	45.96	56.00	-10.04	QP	
8	1.8938	20.60	9.87	30.47	46.00	-15.53	AVG	
9	4.9088	36.51	9.01	45.52	56.00	-10.48	QP	
10	4.9088	21.70	9.01	30.71	46.00	-15.29	AVG	
11	7.8180	35.28	10.00	45.28	60.00	-14.72	QP	
12	7.8180	19.50	10.00	29.50	50.00	-20.50	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Neutral

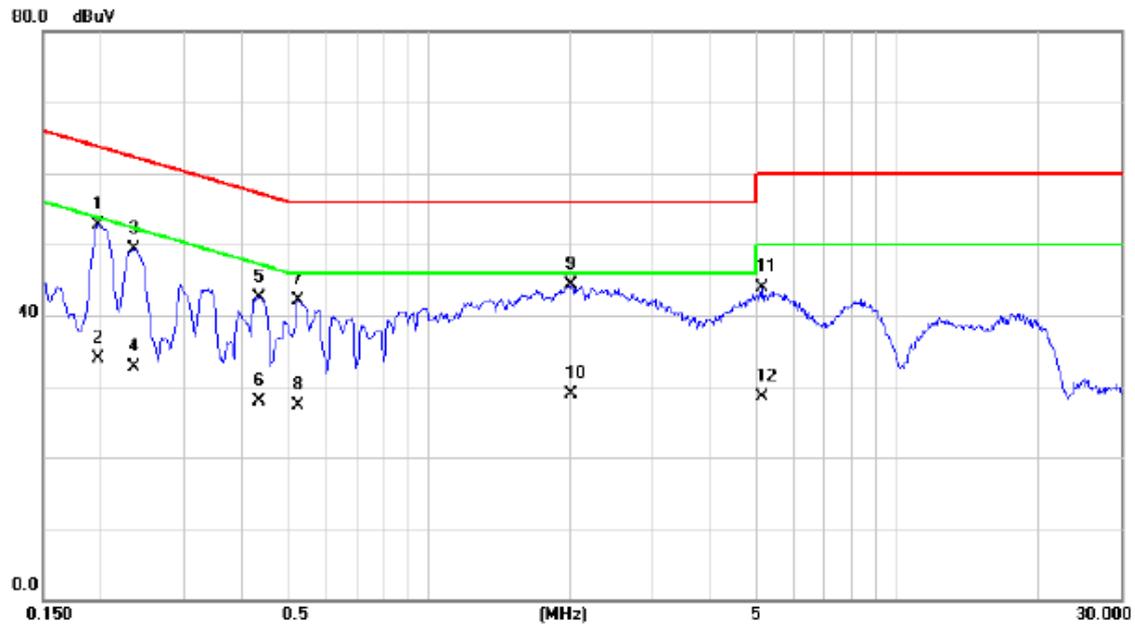

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1973	43.19	9.61	52.80	63.72	-10.92	QP	
2		0.1973	24.30	9.61	33.91	53.72	-19.81	AVG	
3		0.2355	39.75	9.62	49.37	62.25	-12.88	QP	
4		0.2355	23.10	9.62	32.72	52.25	-19.53	AVG	
5		0.4335	32.87	9.64	42.51	57.19	-14.68	QP	
6		0.4335	18.30	9.64	27.94	47.19	-19.25	AVG	
7		0.5257	32.49	9.65	42.14	56.00	-13.86	QP	
8		0.5257	17.60	9.65	27.25	46.00	-18.75	AVG	
9		2.0175	34.37	9.93	44.30	56.00	-11.70	QP	
10		2.0175	18.90	9.93	28.83	46.00	-17.17	AVG	
11		5.1338	33.75	10.10	43.85	60.00	-16.15	QP	
12		5.1338	18.50	10.10	28.60	50.00	-21.40	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug) / Liansheng USB cable / Feimaotui Lithium Battery


Line

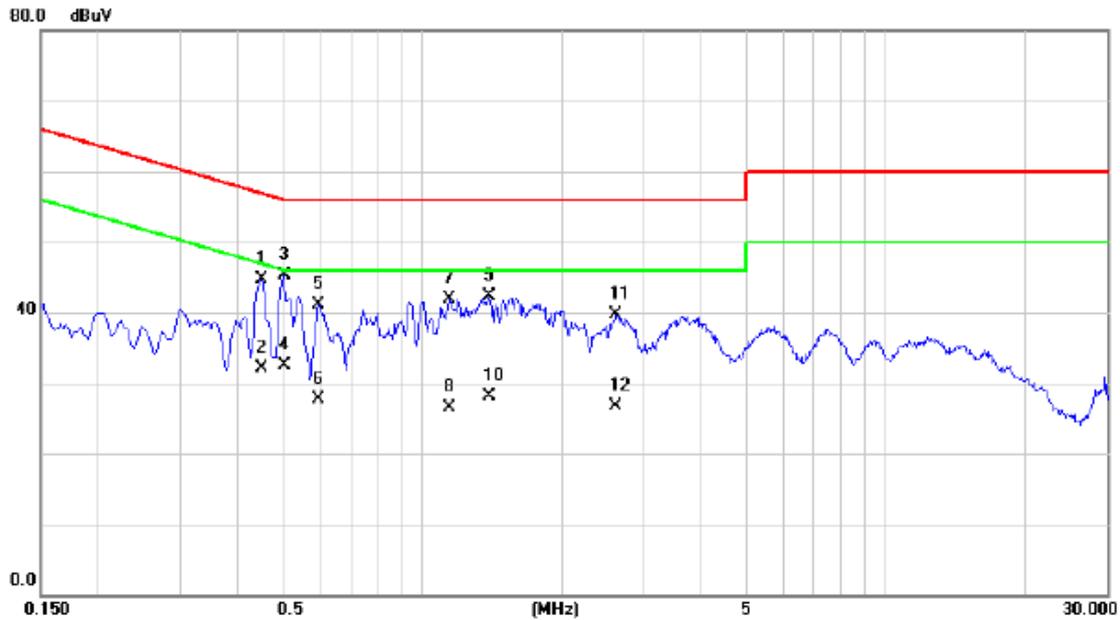

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4492	34.99	9.81	44.80	56.89	-12.09	QP	
2		0.4492	22.30	9.81	32.11	46.89	-14.78	AVG	
3	*	0.5032	35.58	9.82	45.40	56.00	-10.60	QP	
4		0.5032	22.70	9.82	32.52	46.00	-13.48	AVG	
5		0.5977	31.34	9.86	41.20	56.00	-14.80	QP	
6		0.5977	17.80	9.86	27.66	46.00	-18.34	AVG	
7		1.1422	31.81	10.01	41.82	56.00	-14.18	QP	
8		1.1422	16.40	10.01	26.41	46.00	-19.59	AVG	
9		1.3920	32.30	9.96	42.26	56.00	-13.74	QP	
10		1.3920	18.10	9.96	28.06	46.00	-17.94	AVG	
11		2.6115	29.86	9.91	39.77	56.00	-16.23	QP	
12		2.6115	16.70	9.91	26.61	46.00	-19.39	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug) / Liansheng USB cable / Feimaotui Lithium Battery


Neutral

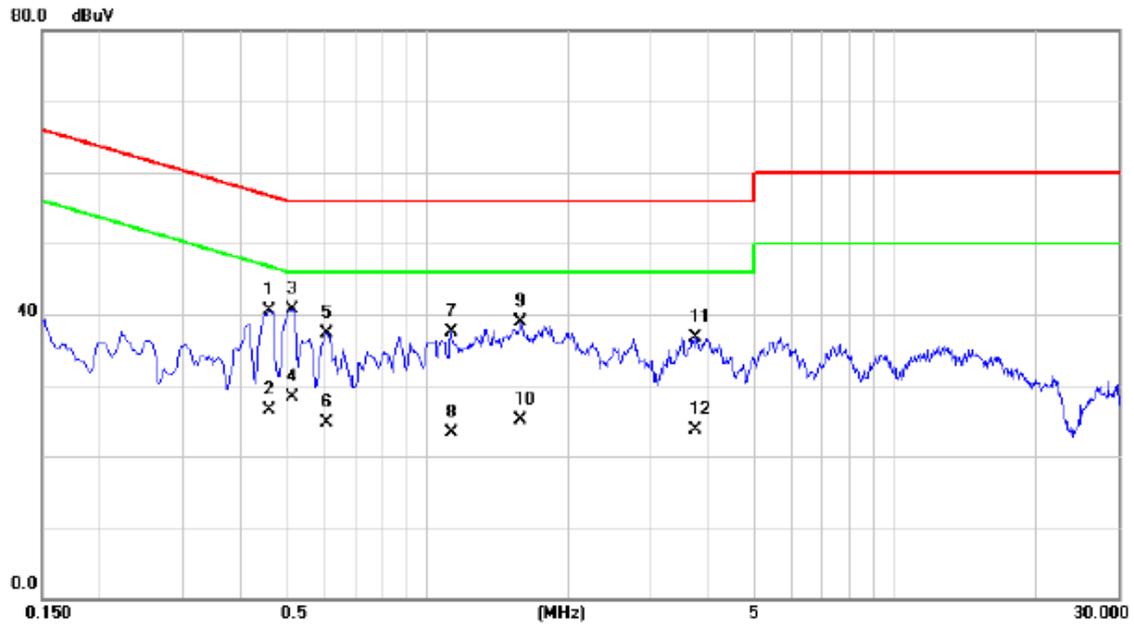

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4582	30.81	9.64	40.45	56.73	-16.28	QP	
2		0.4582	16.80	9.64	26.44	46.73	-20.29	AVG	
3	*	0.5144	30.97	9.65	40.62	56.00	-15.38	QP	
4		0.5144	18.60	9.65	28.25	46.00	-17.75	AVG	
5		0.6090	27.54	9.68	37.22	56.00	-18.78	QP	
6		0.6090	15.10	9.68	24.78	46.00	-21.22	AVG	
7		1.1242	27.62	9.80	37.42	56.00	-18.58	QP	
8		1.1242	13.60	9.80	23.40	46.00	-22.60	AVG	
9		1.5855	28.97	9.84	38.81	56.00	-17.19	QP	
10		1.5855	15.20	9.84	25.04	46.00	-20.96	AVG	
11		3.7410	26.87	9.93	36.80	56.00	-19.20	QP	
12		3.7410	13.70	9.93	23.63	46.00	-22.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug) / Pengyi USB cable / Feimaotui Lithium Battery


Line

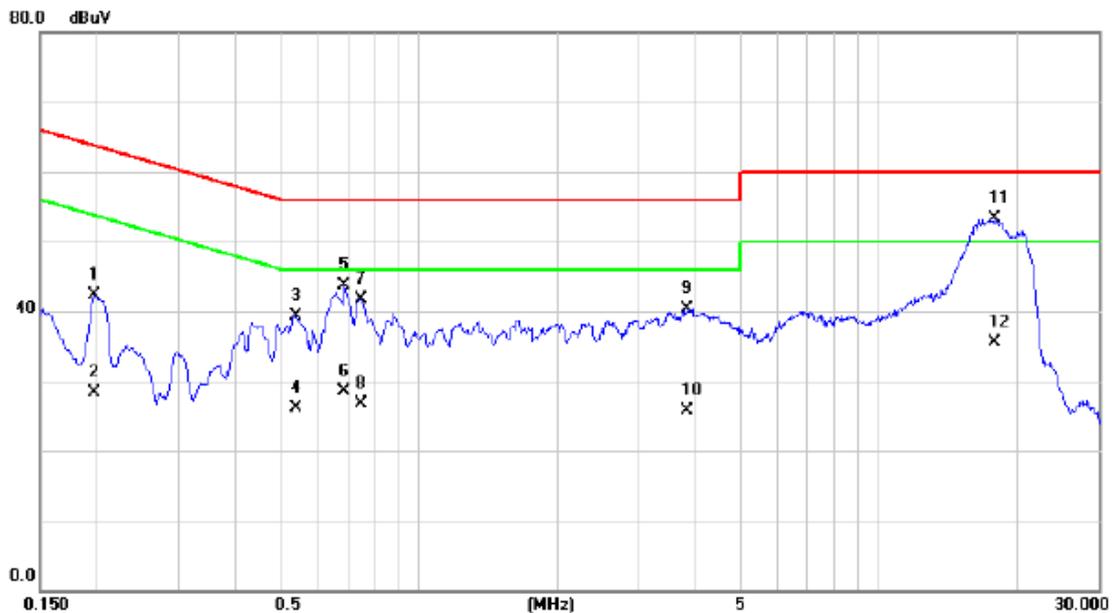

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1973	32.63	9.71	42.34	63.72	-21.38	QP	
2		0.1973	18.50	9.71	28.21	53.72	-25.51	AVG	
3		0.5392	29.41	9.84	39.25	56.00	-16.75	QP	
4		0.5392	16.30	9.84	26.14	46.00	-19.86	AVG	
5		0.6877	33.82	9.90	43.72	56.00	-12.28	QP	
6		0.6877	18.70	9.90	28.60	46.00	-17.40	AVG	
7		0.7485	31.81	9.91	41.72	56.00	-14.28	QP	
8		0.7485	16.70	9.91	26.61	46.00	-19.39	AVG	
9		3.8265	30.40	9.86	40.26	56.00	-15.74	QP	
10		3.8265	15.80	9.86	25.66	46.00	-20.34	AVG	
11	*	17.8237	42.92	10.33	53.25	60.00	-6.75	QP	
12		17.8237	25.20	10.33	35.53	50.00	-14.47	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug) / Pengyi USB cable / Feimaotui Lithium Battery


Neutral

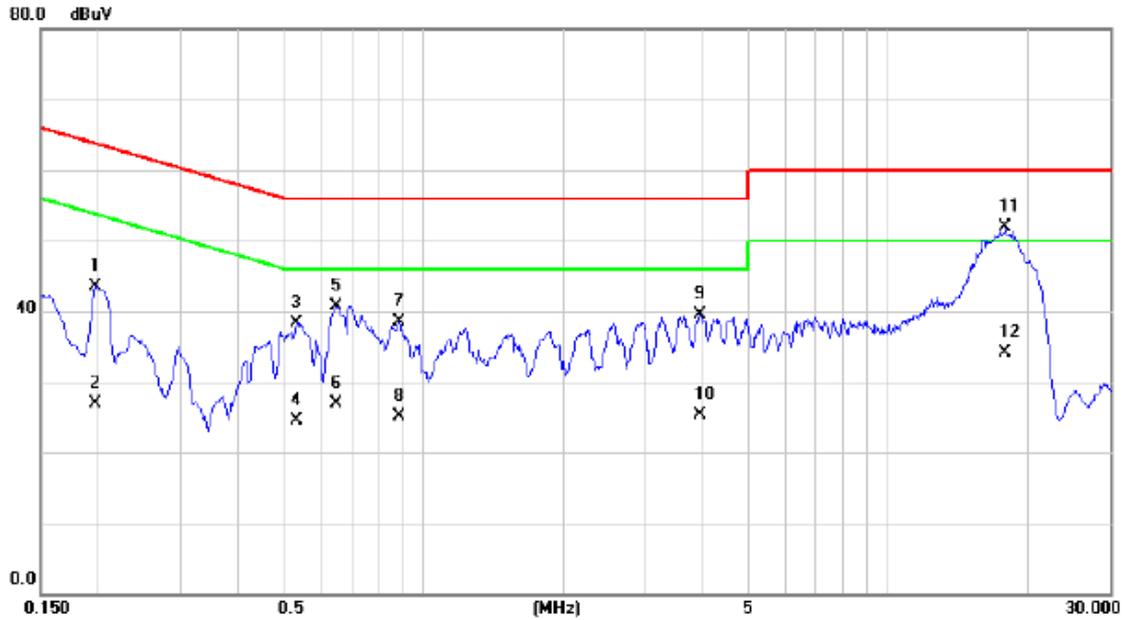

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1973	33.98	9.61	43.59	63.72	-20.13	QP	
2		0.1973	17.30	9.61	26.91	53.72	-26.81	AVG	
3		0.5347	28.67	9.66	38.33	56.00	-17.67	QP	
4		0.5347	14.80	9.66	24.46	46.00	-21.54	AVG	
5		0.6517	31.07	9.69	40.76	56.00	-15.24	QP	
6		0.6517	17.30	9.69	26.99	46.00	-19.01	AVG	
7		0.8857	28.74	9.75	38.49	56.00	-17.51	QP	
8		0.8857	15.30	9.75	25.05	46.00	-20.95	AVG	
9		3.9300	29.62	9.96	39.58	56.00	-16.42	QP	
10		3.9300	15.40	9.96	25.36	46.00	-20.64	AVG	
11	*	17.8688	41.68	10.27	51.95	60.00	-8.05	QP	
12		17.8688	23.80	10.27	34.07	50.00	-15.93	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek(EU Plug) / kangrui USB cable / Feimaotui Lithium Battery


Line

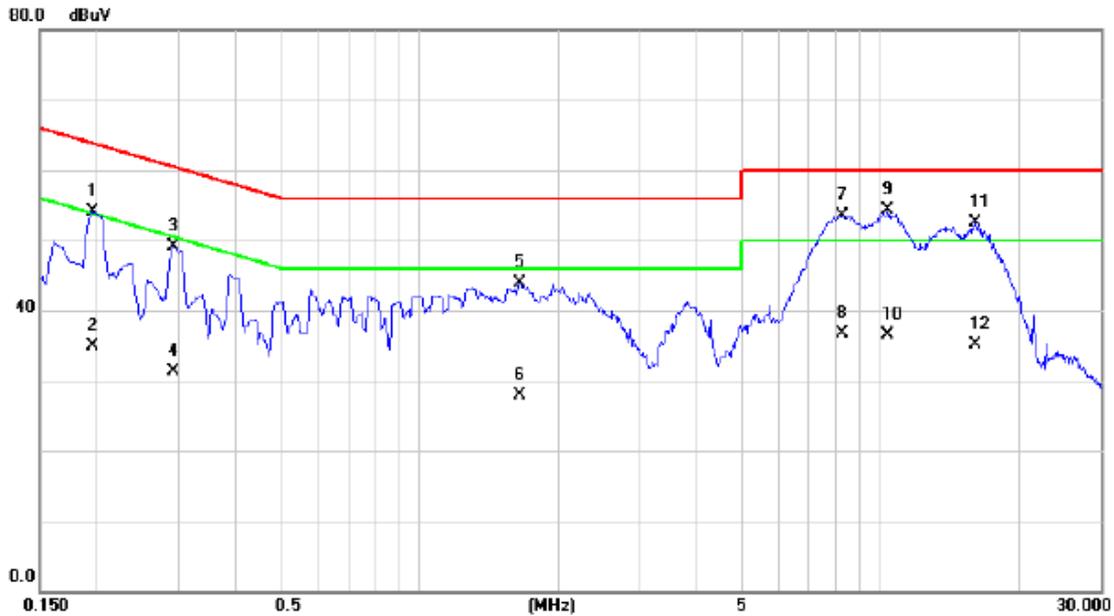

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1950	44.30	9.71	54.01	63.82	-9.81	QP	
2	0.1950	25.10	9.71	34.81	53.82	-19.01	AVG	
3	0.2917	39.26	9.76	49.02	60.48	-11.46	QP	
4	0.2917	21.60	9.76	31.36	50.48	-19.12	AVG	
5	1.6485	34.03	9.90	43.93	56.00	-12.07	QP	
6	1.6485	18.10	9.90	28.00	46.00	-18.00	AVG	
7	8.2883	43.58	10.01	53.59	60.00	-6.41	QP	
8	8.2883	26.70	10.01	36.71	50.00	-13.29	AVG	
9 *	10.3628	44.19	10.07	54.26	60.00	-5.74	QP	
10	10.3628	26.50	10.07	36.57	50.00	-13.43	AVG	
11	16.1025	42.17	10.30	52.47	60.00	-7.53	QP	
12	16.1025	24.80	10.30	35.10	50.00	-14.90	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek(EU Plug) / kangrui USB cable / Feimaotui Lithium Battery


Neutral

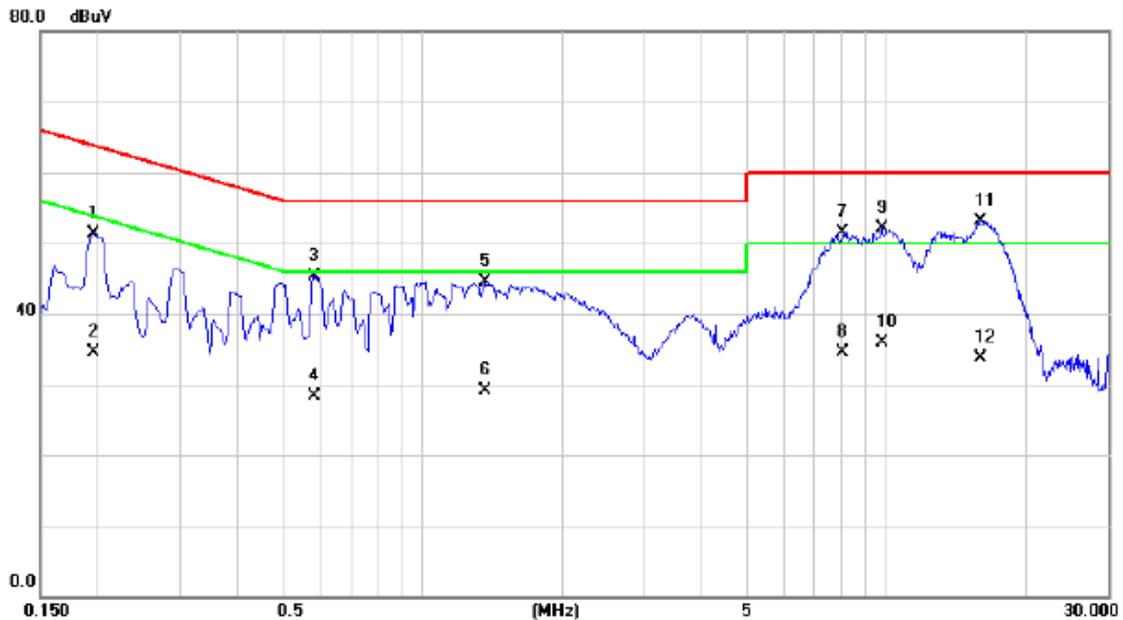

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1950	41.67	9.61	51.28	63.82	-12.54	QP	
2	0.1950	24.90	9.61	34.51	53.82	-19.31	AVG	
3	0.5842	35.69	9.67	45.36	56.00	-10.64	QP	
4	0.5842	18.60	9.67	28.27	46.00	-17.73	AVG	
5	1.3628	34.72	9.82	44.54	56.00	-11.46	QP	
6	1.3628	19.30	9.82	29.12	46.00	-16.88	AVG	
7	8.0205	41.49	10.11	51.60	60.00	-8.40	QP	
8	8.0205	24.40	10.11	34.51	50.00	-15.49	AVG	
9	9.7643	42.16	10.04	52.20	60.00	-7.80	QP	
10	9.7643	25.80	10.04	35.84	50.00	-14.16	AVG	
11 *	15.9428	42.81	10.27	53.08	60.00	-6.92	QP	
12	15.9428	23.50	10.27	33.77	50.00	-16.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle / Liansheng USB cable / xinwangda Lithium Battery


Line

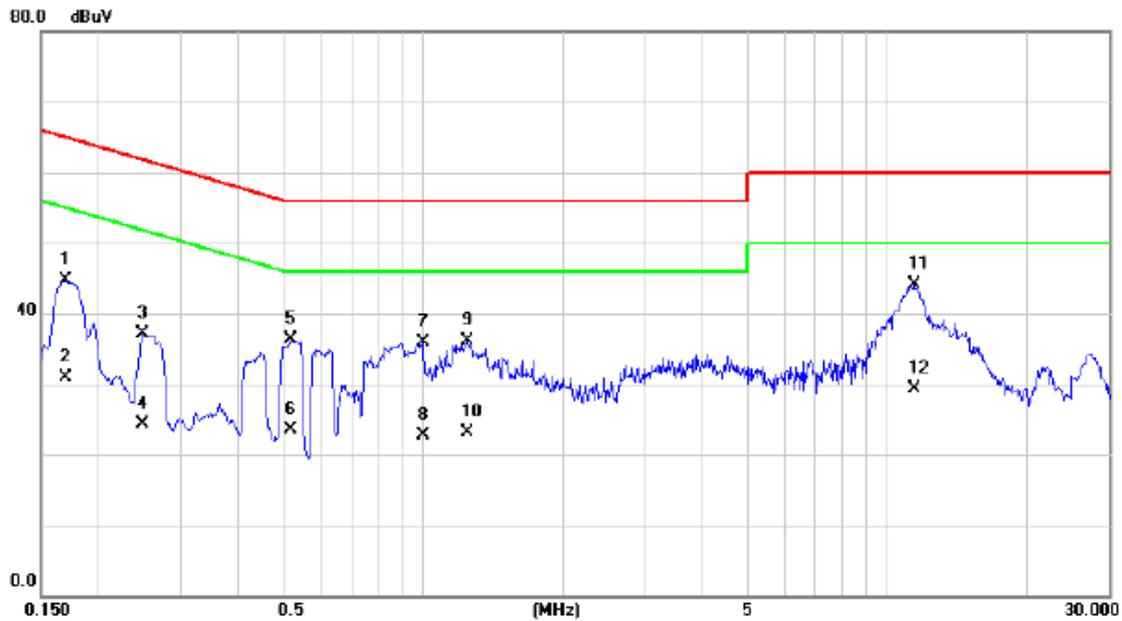

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1701	35.07	9.69	44.76	64.96	-20.20	QP	
2		0.1701	21.30	9.69	30.99	54.96	-23.97	AVG	
3		0.2490	27.46	9.73	37.19	61.79	-24.60	QP	
4		0.2490	14.50	9.73	24.23	51.79	-27.56	AVG	
5		0.5167	26.45	9.82	36.27	56.00	-19.73	QP	
6		0.5167	13.60	9.82	23.42	46.00	-22.58	AVG	
7		0.9981	25.88	9.98	35.86	56.00	-20.14	QP	
8		0.9981	12.80	9.98	22.78	46.00	-23.22	AVG	
9		1.2412	26.04	10.00	36.04	56.00	-19.96	QP	
10		1.2412	13.20	10.00	23.20	46.00	-22.80	AVG	
11	*	11.4045	34.04	10.12	44.16	60.00	-15.84	QP	
12		11.4045	19.20	10.12	29.32	50.00	-20.68	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle / Liansheng USB cable / xinwangda Lithium Battery

Neutral

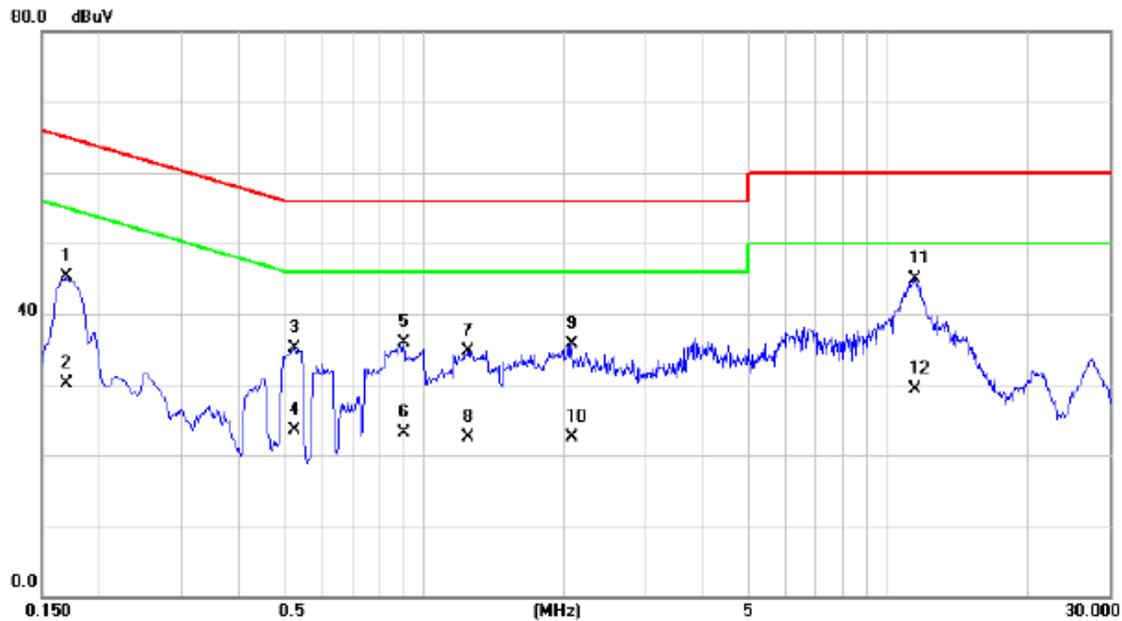


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1701	35.79	9.60	45.39	64.96	-19.57	QP	
2		0.1701	20.60	9.60	30.20	54.96	-24.76	AVG	
3		0.5256	25.38	9.65	35.03	56.00	-20.97	QP	
4		0.5256	13.90	9.65	23.55	46.00	-22.45	AVG	
5		0.9082	26.12	9.75	35.87	56.00	-20.13	QP	
6		0.9082	13.40	9.75	23.15	46.00	-22.85	AVG	
7		1.2412	24.89	9.80	34.69	56.00	-21.31	QP	
8		1.2412	12.80	9.80	22.60	46.00	-23.40	AVG	
9		2.0872	25.73	9.91	35.64	56.00	-20.36	QP	
10		2.0872	12.60	9.91	22.51	46.00	-23.49	AVG	
11	*	11.4696	34.77	10.11	44.88	60.00	-15.12	QP	
12		11.4696	19.10	10.11	29.21	50.00	-20.79	AVG	

ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Vertical

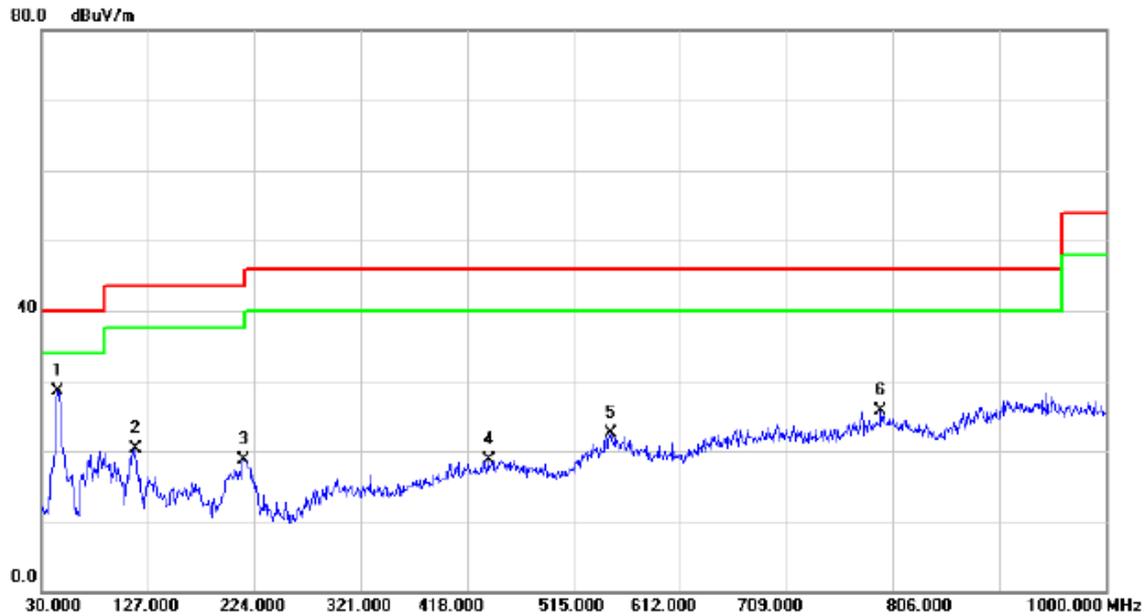

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	44.5500	42.15	-13.73	28.42	40.00	-11.58	QP	
2		116.3300	36.93	-16.63	20.30	43.50	-23.20	QP	
3		214.3000	35.28	-16.56	18.72	43.50	-24.78	QP	
4		437.4000	28.69	-10.02	18.67	46.00	-27.33	QP	
5		548.9500	30.50	-8.01	22.49	46.00	-23.51	QP	
6		795.3300	30.50	-4.77	25.73	46.00	-20.27	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Horizontal

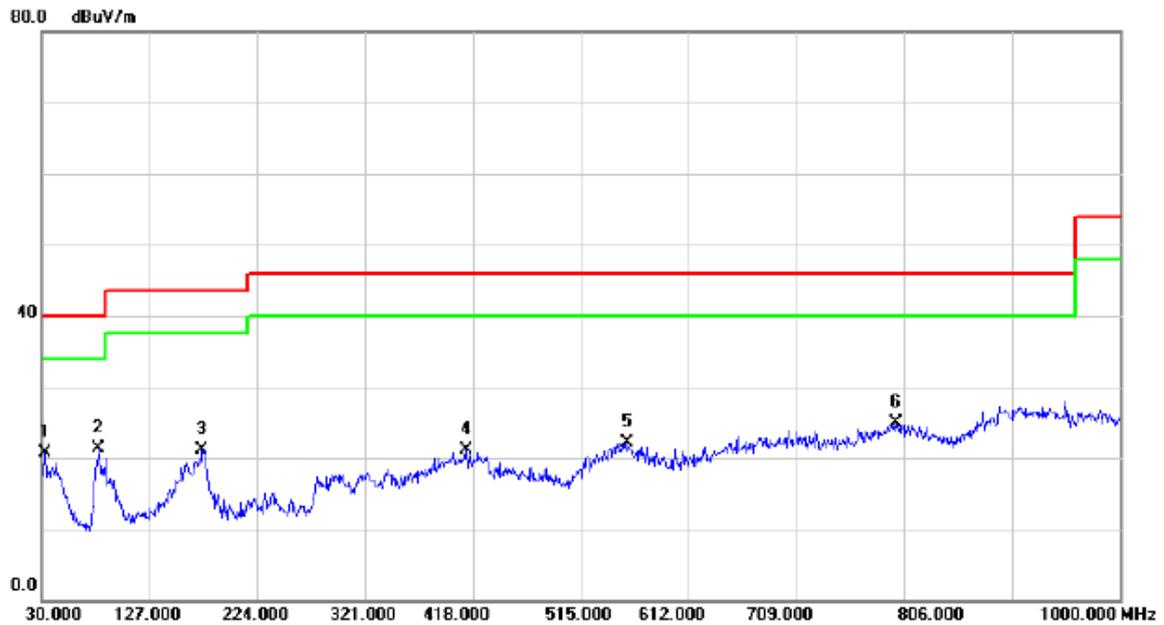

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		32.9100	35.75	-15.12	20.63	40.00	-19.37	QP	
2	*	81.4100	39.81	-18.42	21.39	40.00	-18.61	QP	
3		174.5300	36.03	-14.87	21.16	43.50	-22.34	QP	
4		412.1800	31.76	-10.74	21.02	46.00	-24.98	QP	
5		557.6800	30.04	-7.90	22.14	46.00	-23.86	QP	
6		798.2400	29.68	-4.76	24.92	46.00	-21.08	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK / Pengyi USB cable / xingwangda Lithium Battery


Vertical

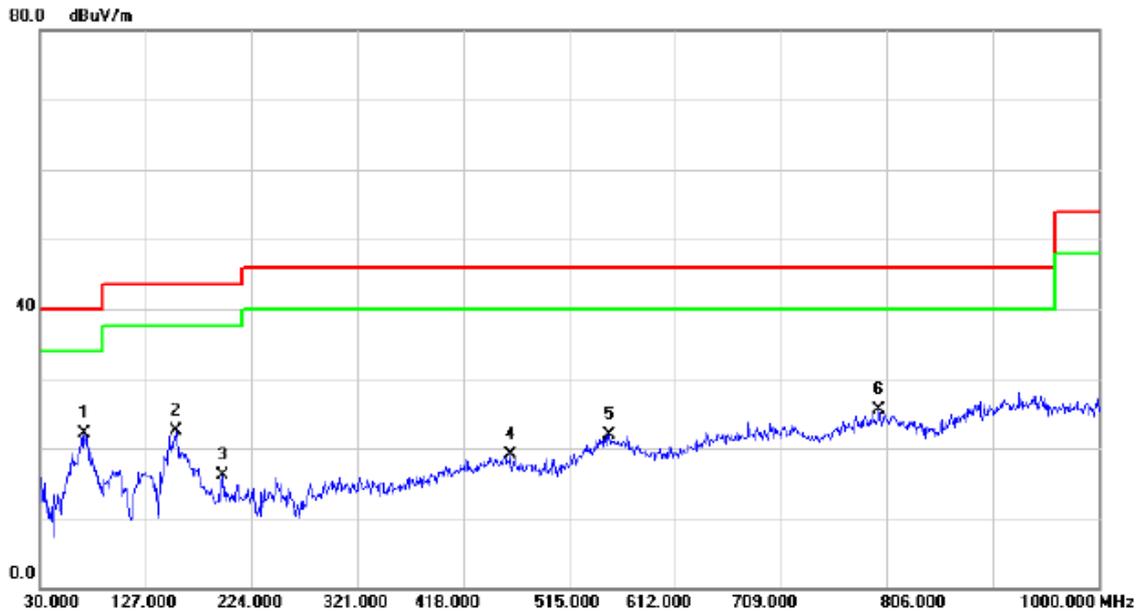

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	70.7400	38.46	-16.39	22.07	40.00	-17.93	QP	
2		155.1300	36.45	-13.99	22.46	43.50	-21.04	QP	
3		197.8100	32.85	-16.71	16.14	43.50	-27.36	QP	
4		460.6800	28.76	-9.59	19.17	46.00	-26.83	QP	
5		551.8600	29.88	-7.96	21.92	46.00	-24.08	QP	
6		799.2100	30.24	-4.74	25.50	46.00	-20.50	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK / Pengyi USB cable / xingwangda Lithium Battery


Horizontal

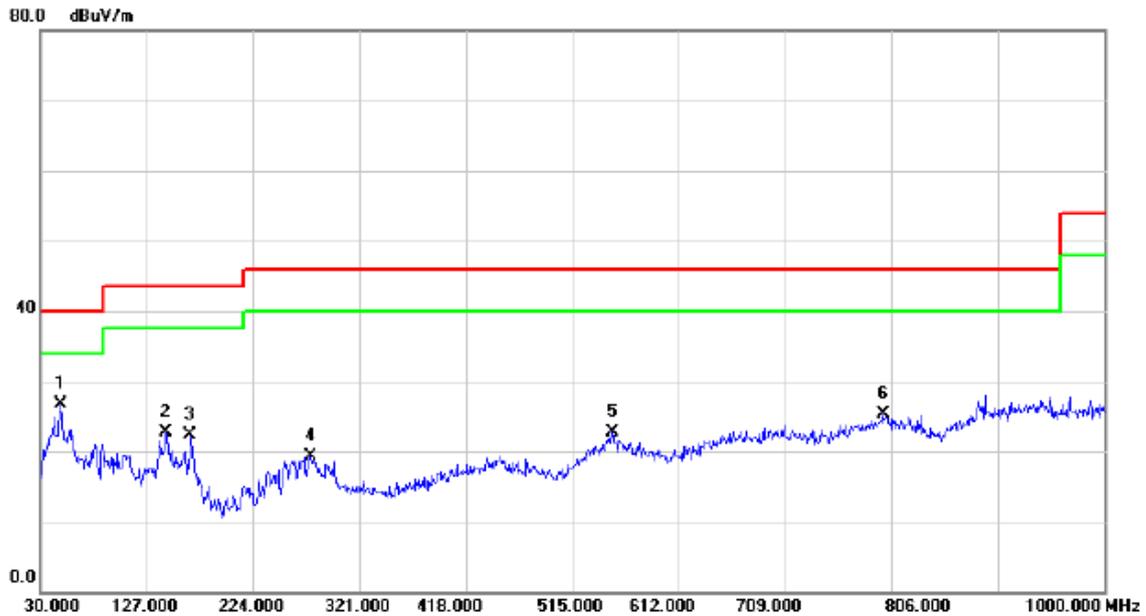

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	48.4300	40.33	-13.69	26.64	40.00	-13.36	QP	
2		144.4600	36.88	-14.27	22.61	43.50	-20.89	QP	
3		166.7700	36.61	-14.26	22.35	43.50	-21.15	QP	
4		276.3800	33.28	-14.04	19.24	46.00	-26.76	QP	
5		551.8600	30.69	-7.96	22.73	46.00	-23.27	QP	
6		798.2400	30.04	-4.76	25.28	46.00	-20.72	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery

Vertical

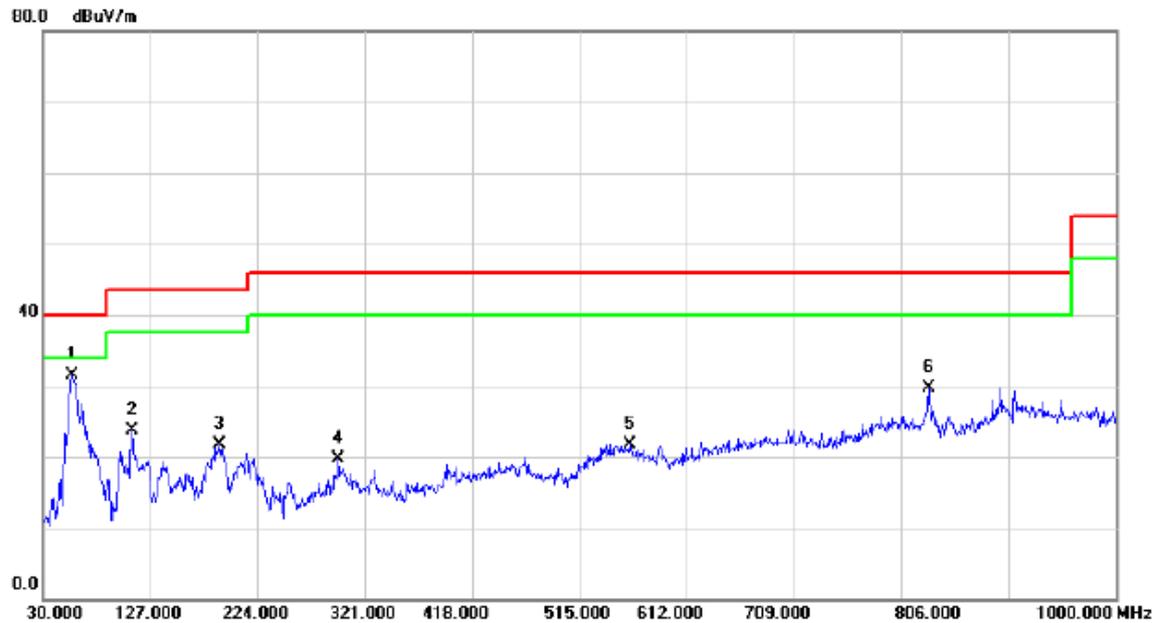

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.1900	45.78	-14.34	31.44	40.00	-8.56	QP	
2		110.5100	40.90	-17.26	23.64	43.50	-19.86	QP	
3		190.0500	38.40	-16.68	21.72	43.50	-21.78	QP	
4		296.7500	33.35	-13.57	19.78	46.00	-26.22	QP	
5		560.5900	29.62	-7.87	21.75	46.00	-24.25	QP	
6		831.2200	33.92	-4.18	29.74	46.00	-16.26	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.1900	40.23	-14.34	25.89	40.00	-14.11	QP	
2		110.5100	41.27	-17.26	24.01	43.50	-19.49	QP	
3		292.8700	30.52	-13.64	16.88	46.00	-29.12	QP	
4		436.4300	29.41	-10.05	19.36	46.00	-26.64	QP	
5		559.6200	30.24	-7.88	22.36	46.00	-23.64	QP	
6		797.2700	29.79	-4.75	25.04	46.00	-20.96	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery

Vertical

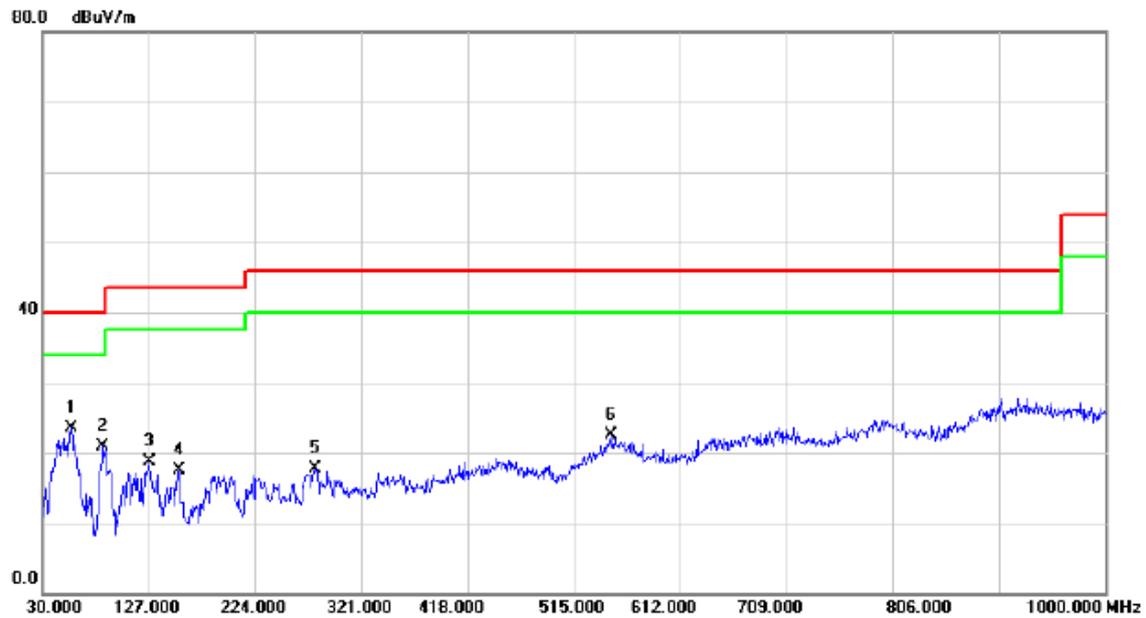

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	56.1900	37.90	-14.34	23.56	40.00	-16.44	QP	
2		85.2900	40.15	-19.27	20.88	40.00	-19.12	QP	
3		127.0000	34.26	-15.58	18.68	43.50	-24.82	QP	
4		154.1600	31.48	-14.00	17.48	43.50	-26.02	QP	
5		279.2900	31.64	-13.98	17.66	46.00	-28.34	QP	
6		548.9500	30.50	-8.01	22.49	46.00	-23.51	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		32.9100	34.15	-15.12	19.03	40.00	-20.97	QP	
2	*	87.2300	45.38	-19.70	25.68	40.00	-14.32	QP	
3		175.5000	33.68	-14.97	18.71	43.50	-24.79	QP	
4		293.8400	31.27	-13.61	17.66	46.00	-28.34	QP	
5		452.9200	28.88	-9.64	19.24	46.00	-26.76	QP	
6		643.0400	30.01	-6.99	23.02	46.00	-22.98	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

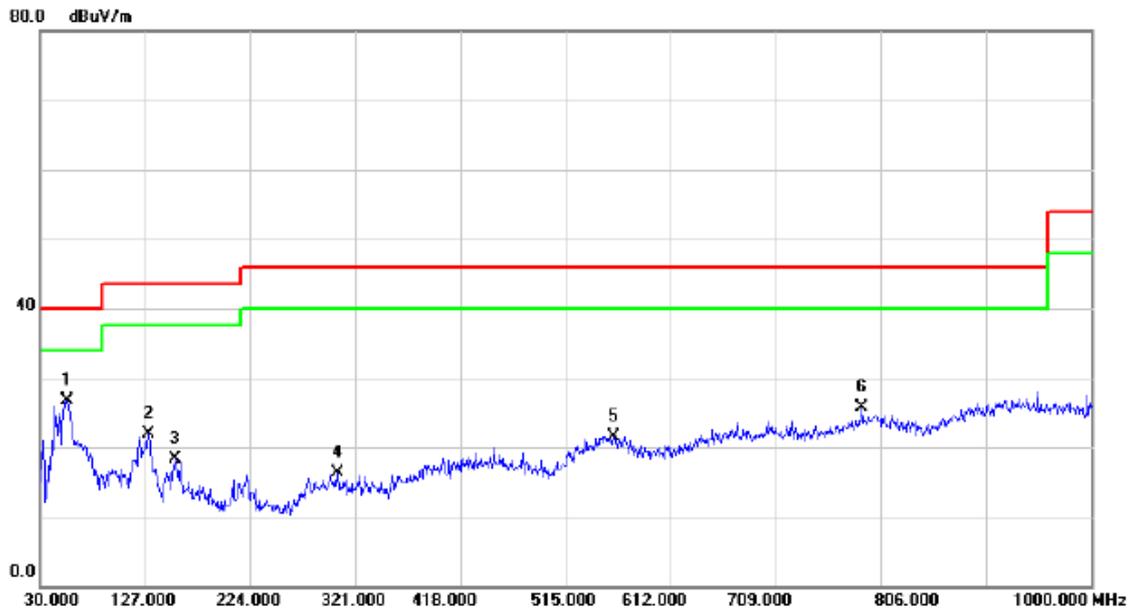

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	55.2200	41.02	-14.24	26.78	40.00	-13.22	QP	
2		129.9100	37.17	-15.31	21.86	43.50	-21.64	QP	
3		154.1600	32.31	-14.00	18.31	43.50	-25.19	QP	
4		304.5100	29.72	-13.37	16.35	46.00	-29.65	QP	
5		559.6200	29.41	-7.88	21.53	46.00	-24.47	QP	
6		788.5400	30.45	-4.80	25.65	46.00	-20.35	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery

Horizontal

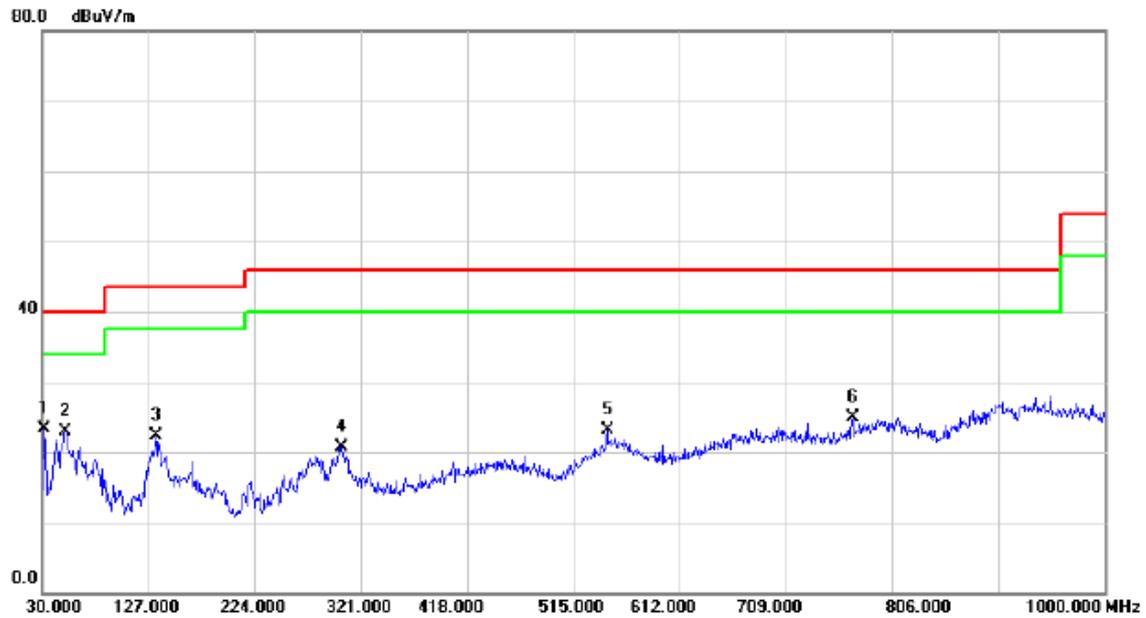

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	31.9400	38.50	-15.10	23.40	40.00	-16.60	QP	
2		51.3400	36.76	-13.83	22.93	40.00	-17.07	QP	
3		133.7900	37.19	-14.97	22.22	43.50	-21.28	QP	
4		303.5400	34.17	-13.39	20.78	46.00	-25.22	QP	
5		546.0400	31.25	-8.08	23.17	46.00	-22.83	QP	
6		770.1100	29.88	-4.90	24.98	46.00	-21.02	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	43.5800	40.28	-13.82	26.46	40.00	-13.54	QP	
2		128.9400	41.05	-15.40	25.65	43.50	-17.85	QP	
3		155.1300	35.57	-13.99	21.58	43.50	-21.92	QP	
4		297.7200	30.19	-13.54	16.65	46.00	-29.35	QP	
5		553.8000	31.83	-7.94	23.89	46.00	-22.11	QP	
6		830.2500	31.15	-4.20	26.95	46.00	-19.05	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		42.6100	32.58	-13.92	18.66	40.00	-21.34	QP	
2		161.9200	29.43	-14.02	15.41	43.50	-28.09	QP	
3		298.6900	36.06	-13.52	22.54	46.00	-23.46	QP	
4		459.7100	28.94	-9.59	19.35	46.00	-26.65	QP	
5		548.9500	31.79	-8.01	23.78	46.00	-22.22	QP	
6	*	793.3900	30.22	-4.78	25.44	46.00	-20.56	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

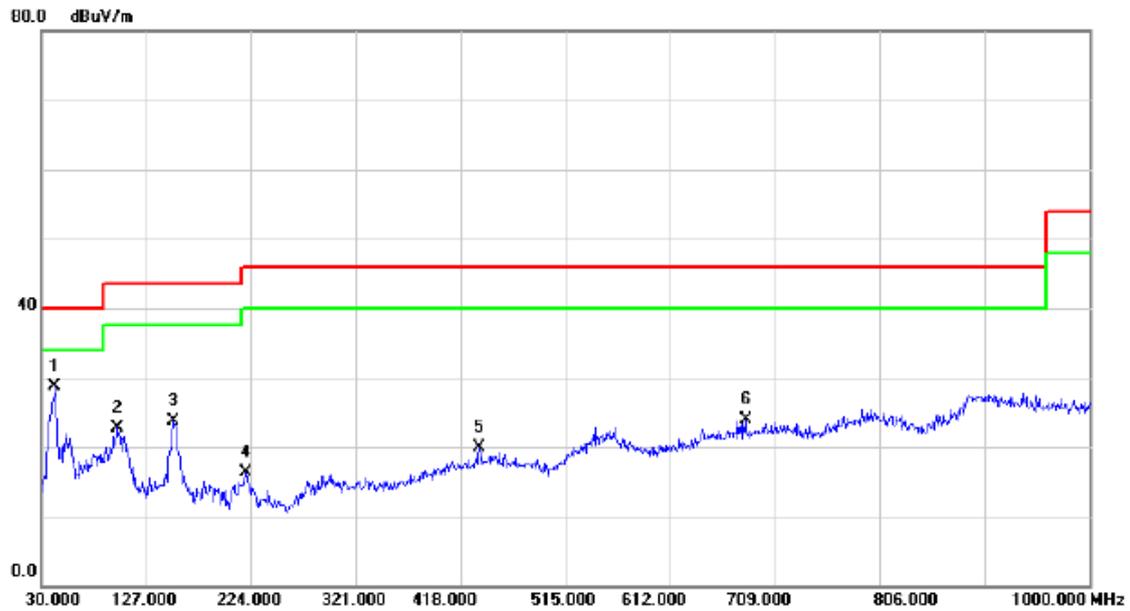

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	42.69	-13.92	28.77	40.00	-11.23	QP	
2		100.8100	41.32	-18.70	22.62	43.50	-20.88	QP	
3		152.2200	37.72	-14.03	23.69	43.50	-19.81	QP	
4		219.1500	32.81	-16.58	16.23	46.00	-29.77	QP	
5		435.4600	30.00	-10.08	19.92	46.00	-26.08	QP	
6		681.8400	29.86	-5.96	23.90	46.00	-22.10	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal

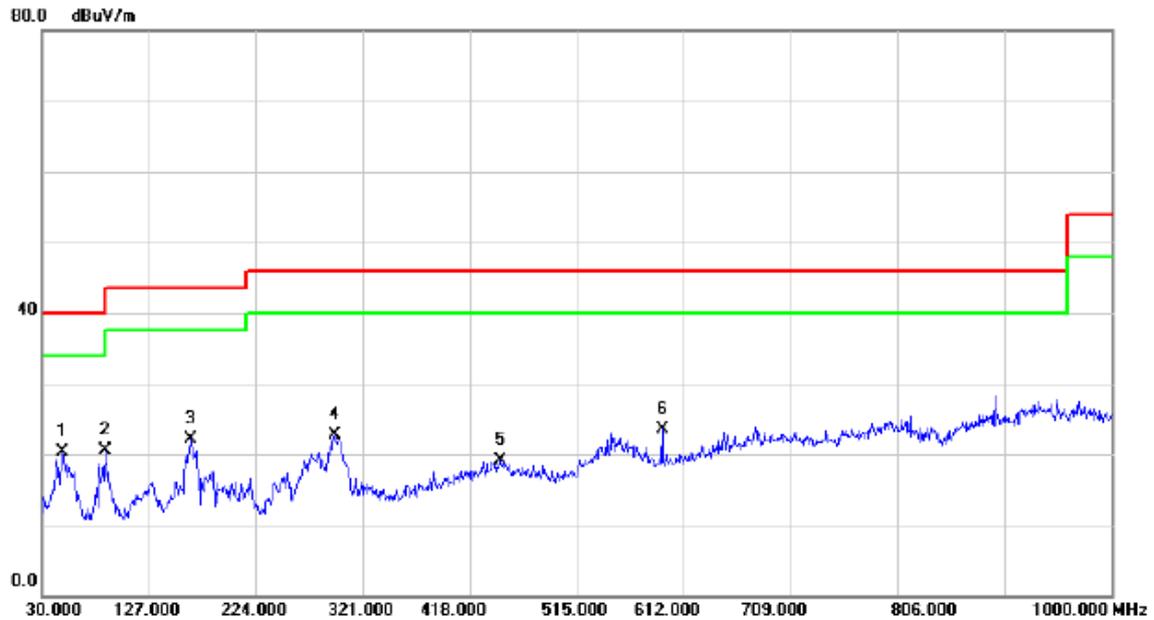

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.4300	33.96	-13.69	20.27	40.00	-19.73	QP	
2	*	87.2300	40.24	-19.70	20.54	40.00	-19.46	QP	
3		164.8300	36.19	-14.16	22.03	43.50	-21.47	QP	
4		295.7800	36.34	-13.57	22.77	46.00	-23.23	QP	
5		445.1600	28.95	-9.81	19.14	46.00	-26.86	QP	
6		592.6000	31.10	-7.54	23.56	46.00	-22.44	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug) / Liansheng USB cable / Feimaotui Lithium Battery


Vertical

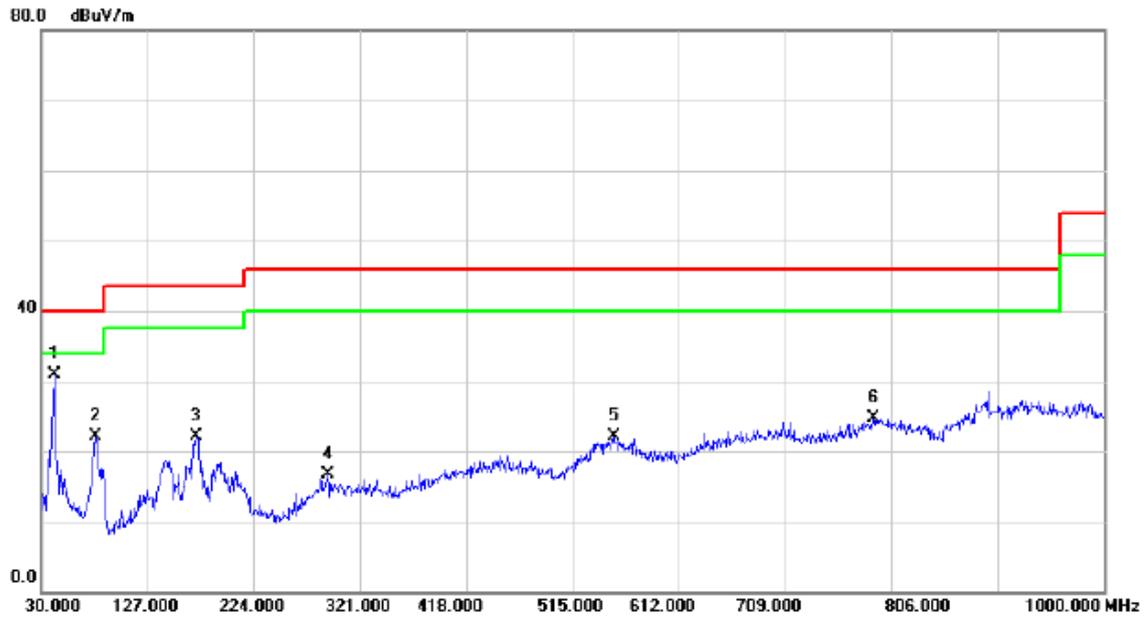

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	41.6400	44.86	-14.03	30.83	40.00	-9.17	QP	
2		79.4700	40.07	-18.01	22.06	40.00	-17.94	QP	
3		171.6200	36.60	-14.57	22.03	43.50	-21.47	QP	
4		291.9000	30.31	-13.65	16.66	46.00	-29.34	QP	
5		552.8300	29.96	-7.95	22.01	46.00	-23.99	QP	
6		789.5100	29.50	-4.79	24.71	46.00	-21.29	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug) / Liansheng USB cable / Feimaotui Lithium Battery


Horizontal

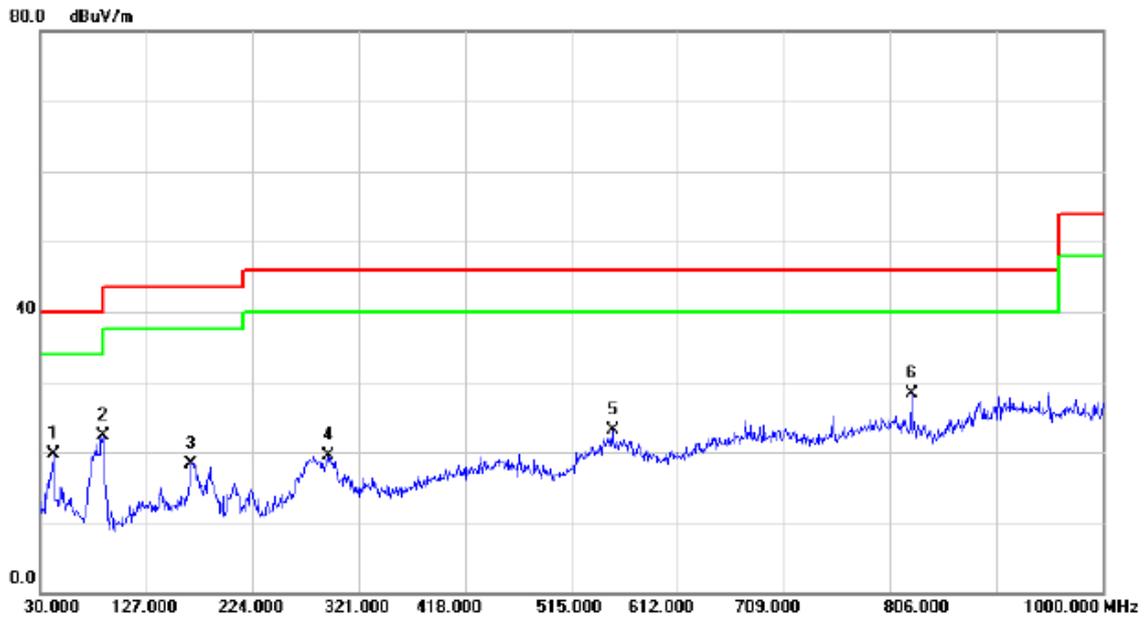

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		41.6400	33.76	-14.03	19.73	40.00	-20.27	QP	
2	*	87.2300	42.03	-19.70	22.33	40.00	-17.67	QP	
3		167.7400	32.57	-14.31	18.26	43.50	-25.24	QP	
4		293.8400	33.13	-13.61	19.52	46.00	-26.48	QP	
5		552.8300	31.04	-7.95	23.09	46.00	-22.91	QP	
6		826.3700	32.49	-4.27	28.22	46.00	-17.78	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug) / Pengyi USB cable / Feimaotui Lithium Battery


Vertical

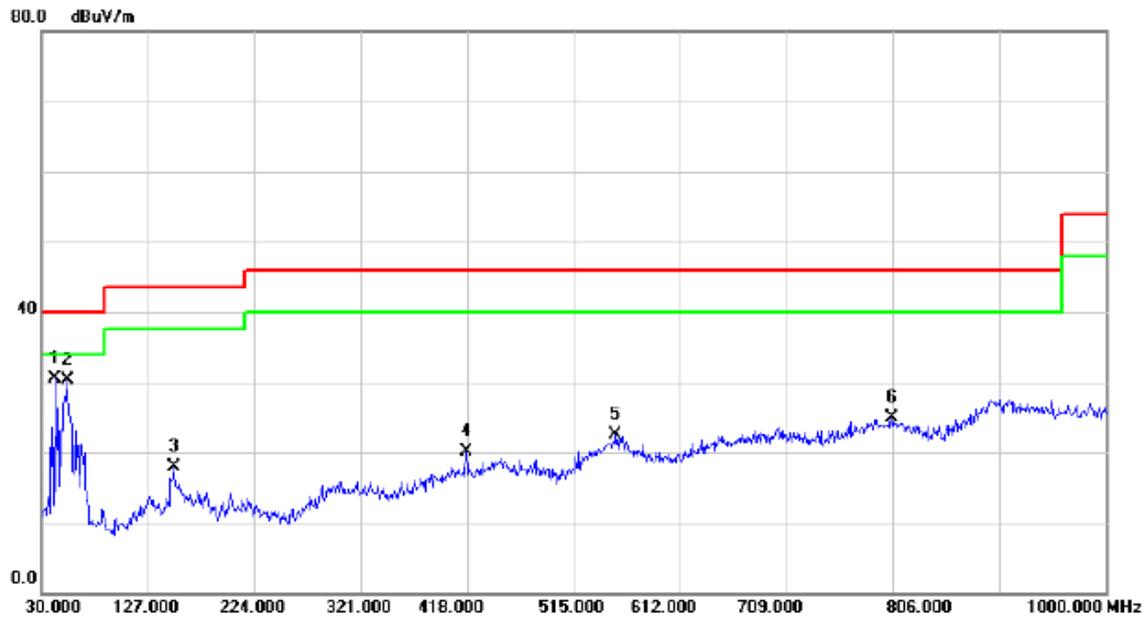

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	44.48	-13.92	30.56	40.00	-9.44	QP	
2		53.2800	44.27	-14.03	30.24	40.00	-9.76	QP	
3		150.2800	31.90	-14.04	17.86	43.50	-25.64	QP	
4		417.0300	30.76	-10.61	20.15	46.00	-25.85	QP	
5		553.8000	30.46	-7.94	22.52	46.00	-23.48	QP	
6		805.0300	29.59	-4.65	24.94	46.00	-21.06	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug) / Pengyi USB cable / Feimaotui Lithium Battery


Horizontal

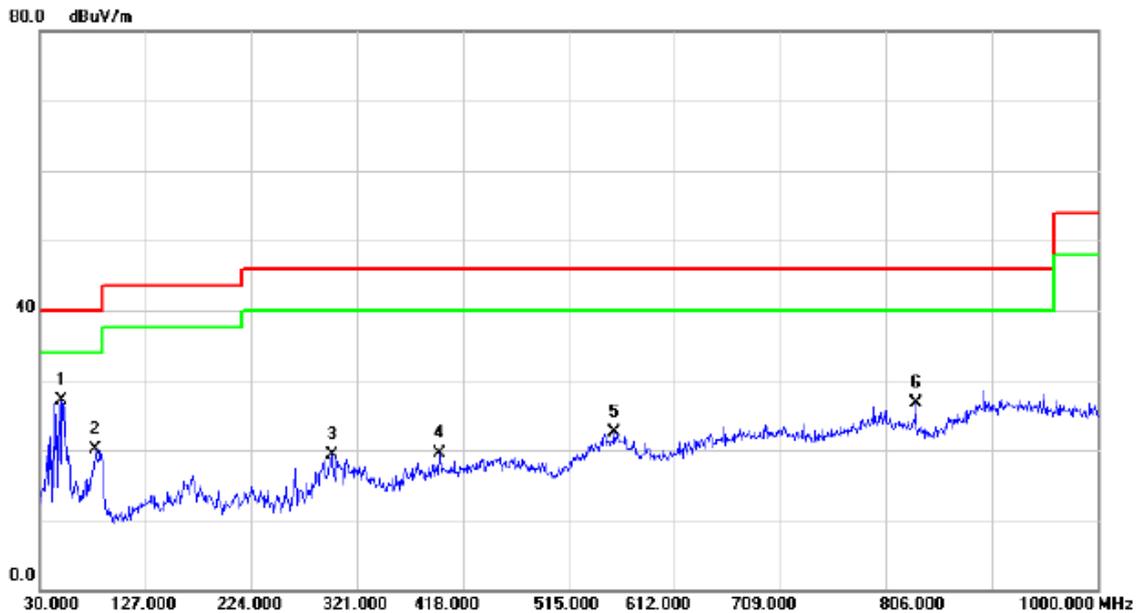

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	50.3700	40.80	-13.73	27.07	40.00	-12.93	QP	
2		81.4100	38.60	-18.42	20.18	40.00	-19.82	QP	
3		297.7200	32.87	-13.54	19.33	46.00	-26.67	QP	
4		396.6600	30.72	-11.17	19.55	46.00	-26.45	QP	
5		556.7100	30.48	-7.91	22.57	46.00	-23.43	QP	
6		833.1600	30.75	-4.14	26.61	46.00	-19.39	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek(EU Plug) / kangrui USB cable / Feimaotui Lithium Battery


Vertical

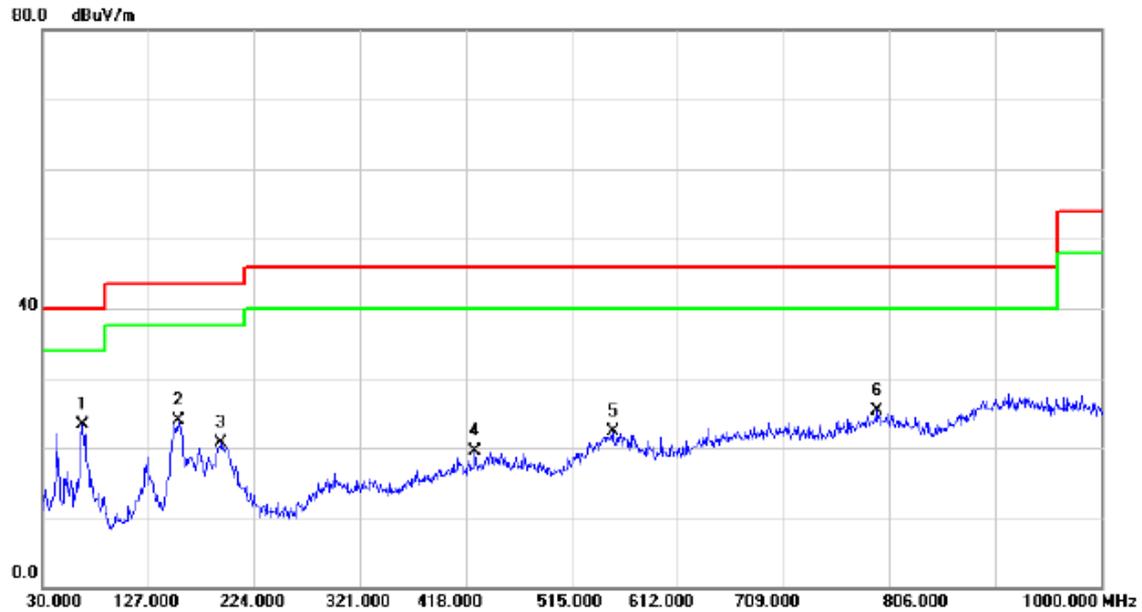

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	66.8600	39.06	-15.78	23.28	40.00	-16.72	QP	
2		154.1600	37.84	-14.00	23.84	43.50	-19.66	QP	
3		192.9600	37.41	-16.70	20.71	43.50	-22.79	QP	
4		426.7300	29.74	-10.32	19.42	46.00	-26.58	QP	
5		552.8300	30.34	-7.95	22.39	46.00	-23.61	QP	
6		795.3300	30.06	-4.77	25.29	46.00	-20.71	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek(EU Plug) / kangrui USB cable / Feimaotui Lithium Battery


Horizontal

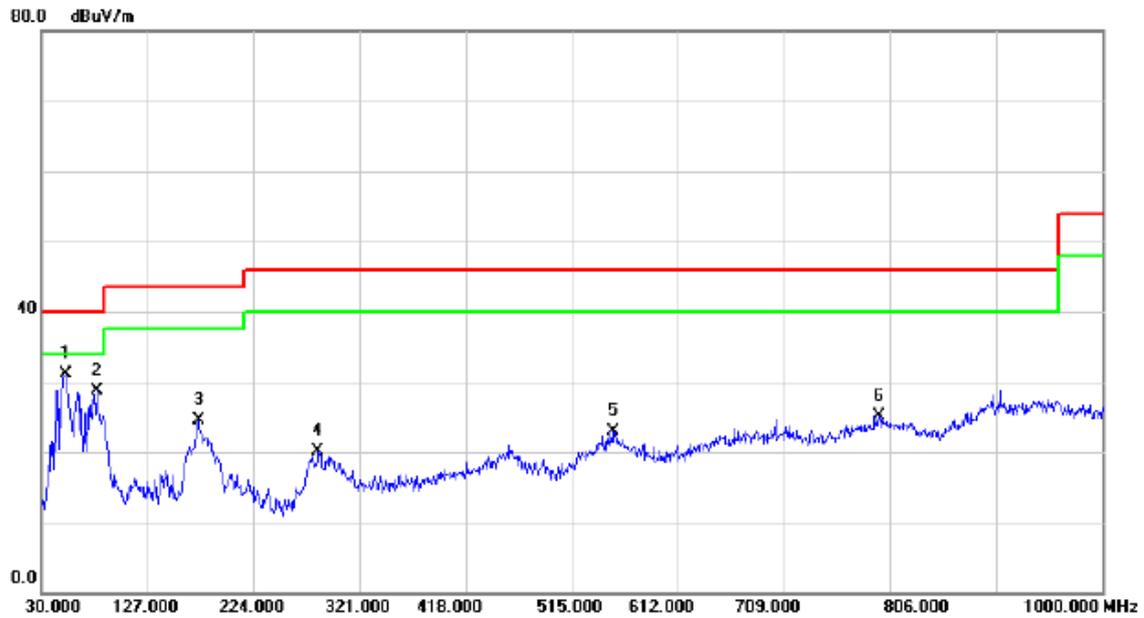

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	52.3100	44.98	-13.93	31.05	40.00	-8.95	QP	
2		80.4400	46.84	-18.21	28.63	40.00	-11.37	QP	
3		173.5600	39.33	-14.78	24.55	43.50	-18.95	QP	
4		283.1700	33.99	-13.88	20.11	46.00	-25.89	QP	
5		552.8300	30.84	-7.95	22.89	46.00	-23.11	QP	
6		796.3000	29.89	-4.75	25.14	46.00	-20.86	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle / Liansheng USB cable / xinwangda Lithium Battery


Vertical

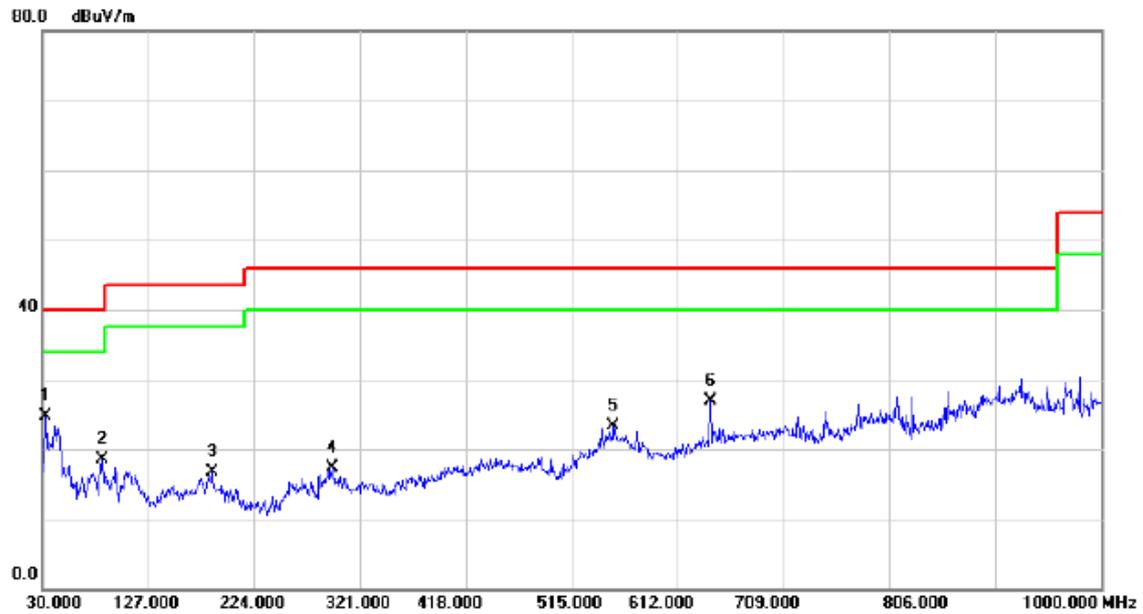

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	32.9100	39.76	-15.12	24.64	40.00	-15.36	QP	
2		85.2900	37.83	-19.27	18.56	40.00	-21.44	QP	
3		185.2000	32.78	-16.07	16.71	43.50	-26.79	QP	
4		295.7800	30.83	-13.57	17.26	46.00	-28.74	QP	
5		553.8000	31.18	-7.94	23.24	46.00	-22.76	QP	
6		642.0700	33.91	-7.00	26.91	46.00	-19.09	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle / Liansheng USB cable / xinwangda Lithium Battery

Horizontal

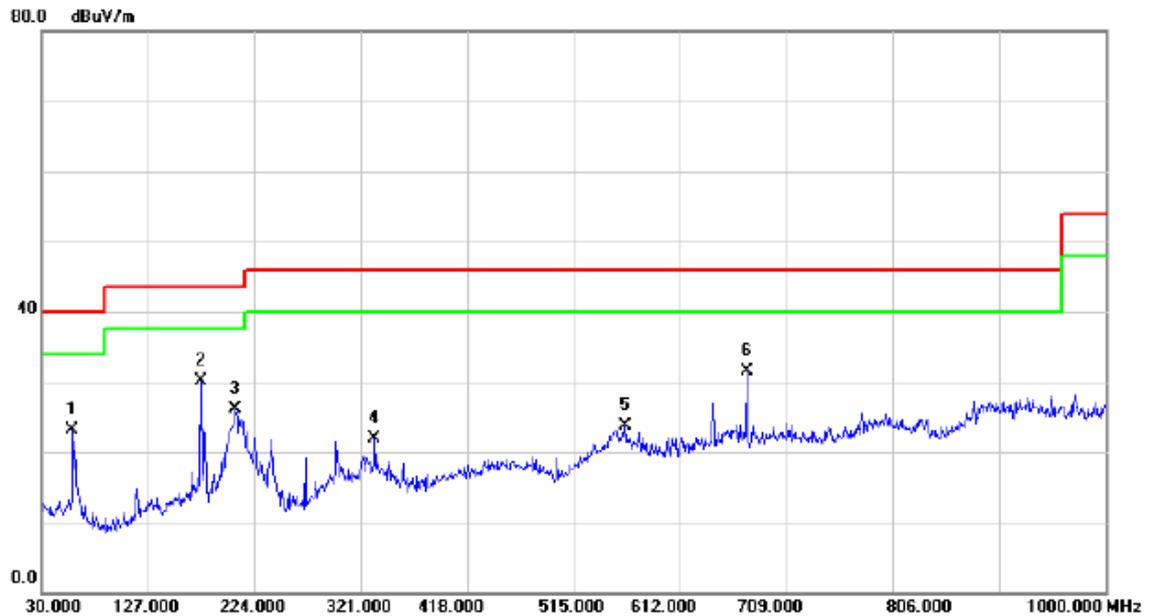


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		58.1300	37.70	-14.55	23.15	40.00	-16.85	QP	
2	*	175.5000	45.03	-14.97	30.06	43.50	-13.44	QP	
3		206.5400	42.81	-16.62	26.19	43.50	-17.31	QP	
4		333.6100	34.56	-12.62	21.94	46.00	-24.06	QP	
5		562.5300	31.49	-7.85	23.64	46.00	-22.36	QP	
6		673.1100	37.80	-6.22	31.58	46.00	-14.42	QP	

ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Vertical

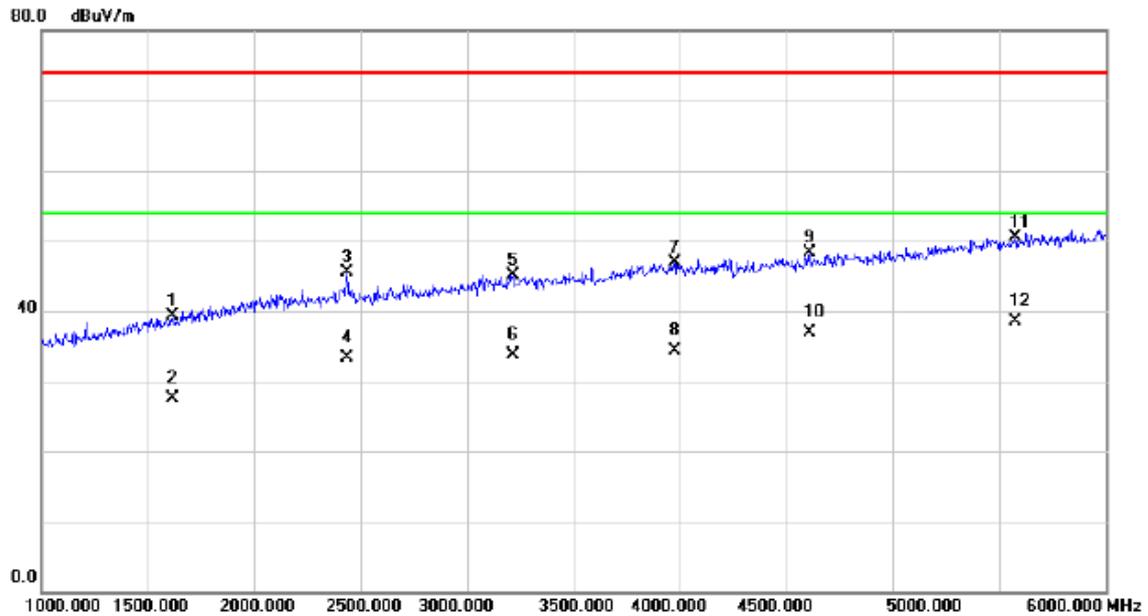

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		1615.000	42.90	-3.56	39.34	74.00	-34.66	peak	
2		1615.000	31.00	-3.56	27.44	54.00	-26.56	AVG	
3		2435.000	45.65	-0.17	45.48	74.00	-28.52	peak	
4		2435.000	33.45	-0.17	33.28	54.00	-20.72	AVG	
5		3215.000	42.79	2.34	45.13	74.00	-28.87	peak	
6		3215.000	31.40	2.34	33.74	54.00	-20.26	AVG	
7		3975.000	40.40	6.44	46.84	74.00	-27.16	peak	
8		3975.000	27.91	6.44	34.35	54.00	-19.65	AVG	
9		4610.000	41.25	7.09	48.34	74.00	-25.66	peak	
10		4610.000	29.72	7.09	36.81	54.00	-17.19	AVG	
11		5575.000	41.23	9.24	50.47	74.00	-23.53	peak	
12	*	5575.000	29.33	9.24	38.57	54.00	-15.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD / Liansheng USB cable / xinwangda Lithium Battery


Horizontal

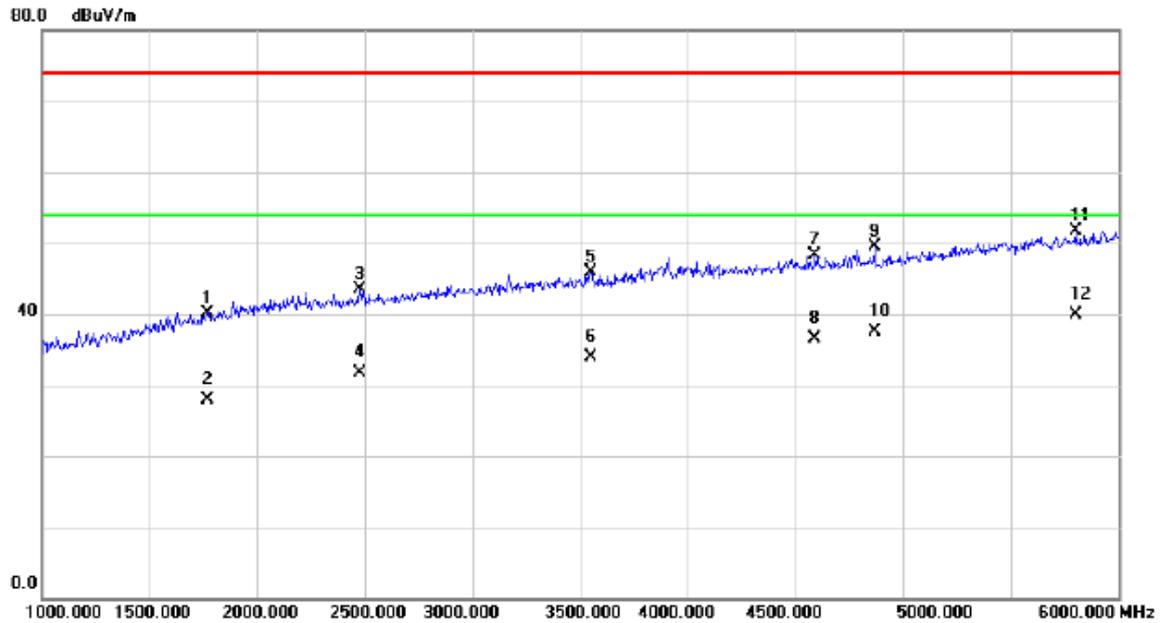

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1770.000	43.01	-2.88	40.13	74.00	-33.87	peak	
2		1770.000	30.77	-2.88	27.89	54.00	-26.11	AVG	
3		2475.000	43.49	-0.02	43.47	74.00	-30.53	peak	
4		2475.000	31.73	-0.02	31.71	54.00	-22.29	AVG	
5		3550.000	42.59	3.36	45.95	74.00	-28.05	peak	
6		3550.000	30.62	3.36	33.98	54.00	-20.02	AVG	
7		4590.000	41.27	7.05	48.32	74.00	-25.68	peak	
8		4590.000	29.46	7.05	36.51	54.00	-17.49	AVG	
9		4870.000	42.06	7.46	49.52	74.00	-24.48	peak	
10		4870.000	30.11	7.46	37.57	54.00	-16.43	AVG	
11		5800.000	42.14	9.50	51.64	74.00	-22.36	peak	
12	*	5800.000	30.35	9.50	39.85	54.00	-14.15	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK / Pengyi USB cable / xingwangda Lithium Battery


Vertical

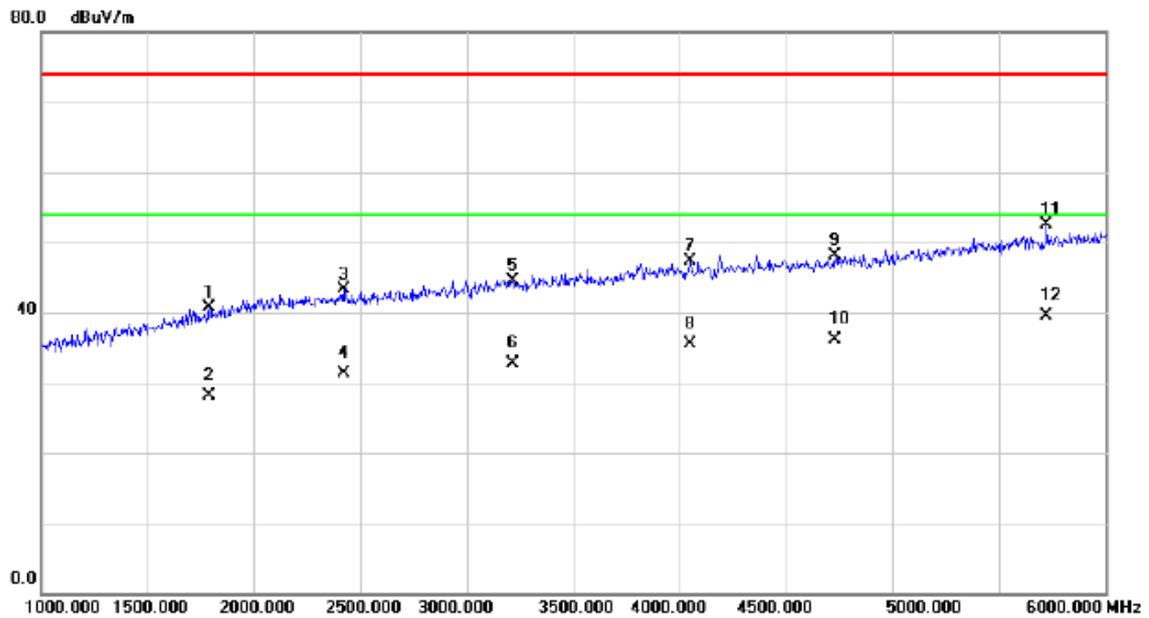

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1790.000	43.49	-2.79	40.70	74.00	-33.30	peak	
2	1790.000	30.84	-2.79	28.05	54.00	-25.95	AVG	
3	2420.000	43.46	-0.23	43.23	74.00	-30.77	peak	
4	2420.000	31.59	-0.23	31.36	54.00	-22.64	AVG	
5	3215.000	42.24	2.34	44.58	74.00	-29.42	peak	
6	3215.000	30.40	2.34	32.74	54.00	-21.26	AVG	
7	4050.000	40.72	6.65	47.37	74.00	-26.63	peak	
8	4050.000	28.88	6.65	35.53	54.00	-18.47	AVG	
9	4730.000	40.83	7.25	48.08	74.00	-25.92	peak	
10	4730.000	28.90	7.25	36.15	54.00	-17.85	AVG	
11	5725.000	43.05	9.41	52.46	74.00	-21.54	peak	
12 *	5725.000	30.14	9.41	39.55	54.00	-14.45	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK / Pengyi USB cable / xingwangda Lithium Battery


Horizontal

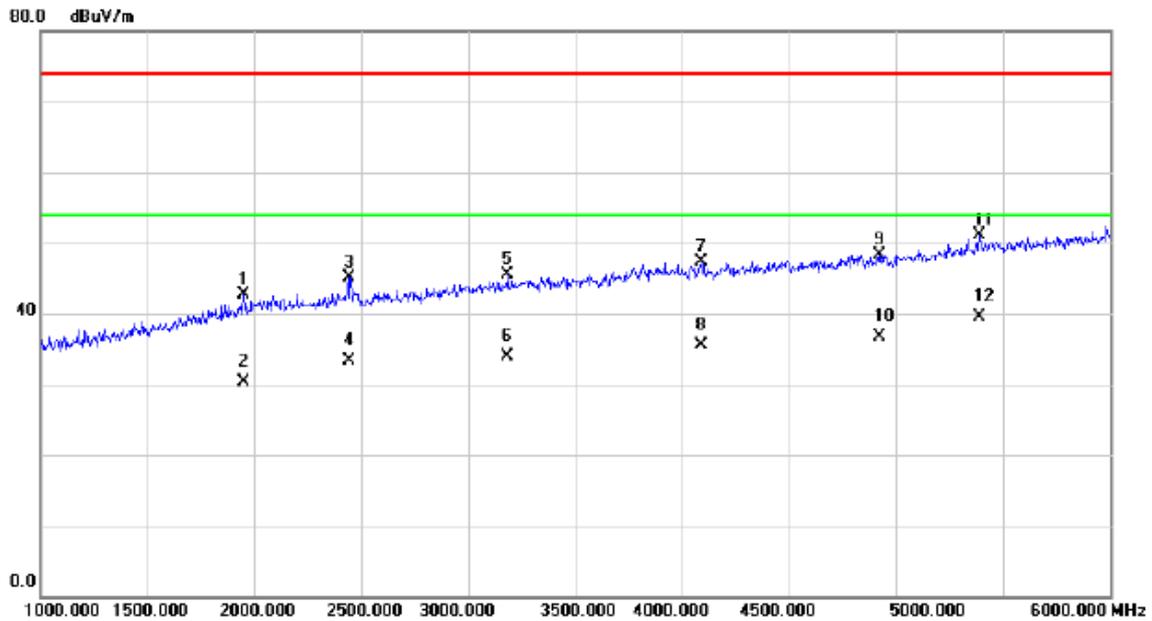

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		1950.000	44.72	-2.10	42.62	74.00	-31.38	peak	
2		1950.000	32.39	-2.10	30.29	54.00	-23.71	AVG	
3		2440.000	45.35	-0.16	45.19	74.00	-28.81	peak	
4		2440.000	33.46	-0.16	33.30	54.00	-20.70	AVG	
5		3185.000	43.23	2.27	45.50	74.00	-28.50	peak	
6		3185.000	31.59	2.27	33.86	54.00	-20.14	AVG	
7		4090.000	40.58	6.68	47.26	74.00	-26.74	peak	
8		4090.000	28.90	6.68	35.58	54.00	-18.42	AVG	
9		4920.000	40.87	7.52	48.39	74.00	-25.61	peak	
10		4920.000	29.27	7.52	36.79	54.00	-17.21	AVG	
11		5390.000	42.27	8.81	51.08	74.00	-22.92	peak	
12	*	5390.000	30.65	8.81	39.46	54.00	-14.54	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

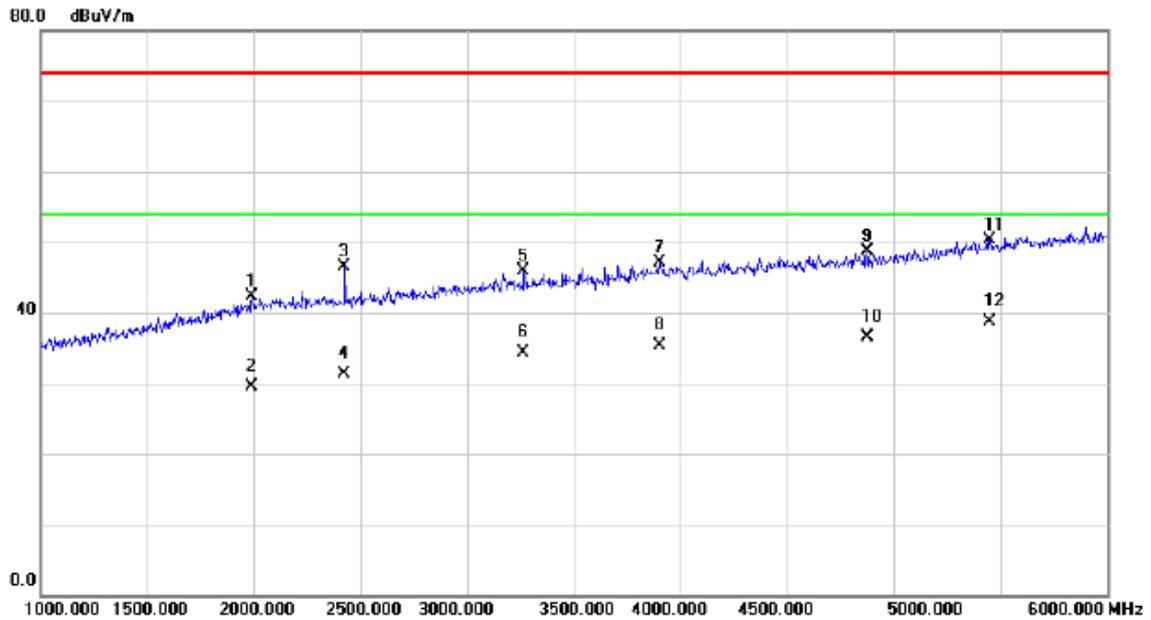

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1990.000	44.16	-1.92	42.24	74.00	-31.76	peak	
2	1990.000	31.49	-1.92	29.57	54.00	-24.43	AVG	
3	2425.000	46.75	-0.21	46.54	74.00	-27.46	peak	
4	2425.000	31.49	-0.21	31.28	54.00	-22.72	AVG	
5	3265.000	43.35	2.46	45.81	74.00	-28.19	peak	
6	3265.000	31.76	2.46	34.22	54.00	-19.78	AVG	
7	3900.000	41.27	5.89	47.16	74.00	-26.84	peak	
8	3900.000	29.42	5.89	35.31	54.00	-18.69	AVG	
9	4875.000	41.30	7.46	48.76	74.00	-25.24	peak	
10	4875.000	28.99	7.46	36.45	54.00	-17.55	AVG	
11	5450.000	41.38	8.99	50.37	74.00	-23.63	peak	
12 *	5450.000	29.70	8.99	38.69	54.00	-15.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal

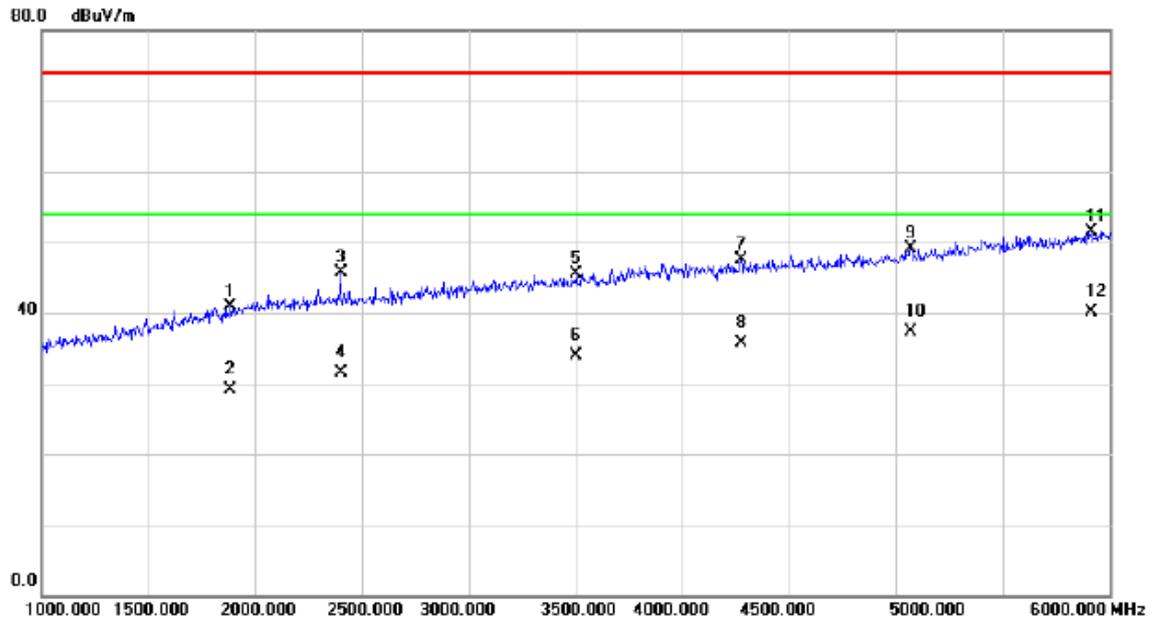

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1885.000	43.31	-2.38	40.93	74.00	-33.07	peak	
2		1885.000	31.47	-2.38	29.09	54.00	-24.91	AVG	
3		2400.000	46.03	-0.31	45.72	74.00	-28.28	peak	
4		2400.000	31.87	-0.31	31.56	54.00	-22.44	AVG	
5		3505.000	42.50	3.03	45.53	74.00	-28.47	peak	
6		3505.000	30.79	3.03	33.82	54.00	-20.18	AVG	
7		4275.000	40.78	6.78	47.56	74.00	-26.44	peak	
8		4275.000	28.95	6.78	35.73	54.00	-18.27	AVG	
9		5070.000	41.29	7.84	49.13	74.00	-24.87	peak	
10		5070.000	29.41	7.84	37.25	54.00	-16.75	AVG	
11		5915.000	41.76	9.65	51.41	74.00	-22.59	peak	
12	*	5915.000	30.39	9.65	40.04	54.00	-13.96	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

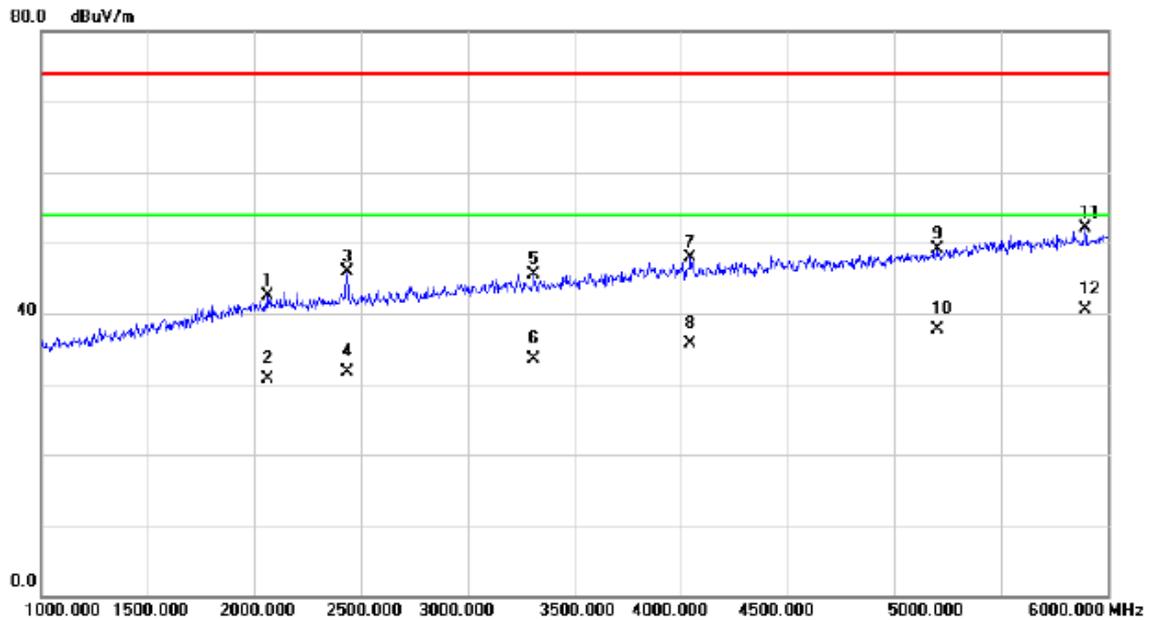

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2060.000	44.15	-1.64	42.51	74.00	-31.49	peak	
2		2060.000	32.41	-1.64	30.77	54.00	-23.23	AVG	
3		2435.000	46.02	-0.17	45.85	74.00	-28.15	peak	
4		2435.000	31.90	-0.17	31.73	54.00	-22.27	AVG	
5		3310.000	42.97	2.56	45.53	74.00	-28.47	peak	
6		3310.000	30.86	2.56	33.42	54.00	-20.58	AVG	
7		4045.000	41.34	6.65	47.99	74.00	-26.01	peak	
8		4045.000	29.08	6.65	35.73	54.00	-18.27	AVG	
9		5205.000	40.93	8.26	49.19	74.00	-24.81	peak	
10		5205.000	29.51	8.26	37.77	54.00	-16.23	AVG	
11		5895.000	42.44	9.62	52.06	74.00	-21.94	peak	
12	*	5895.000	30.98	9.62	40.60	54.00	-13.40	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+Playing+idle+speaker
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal

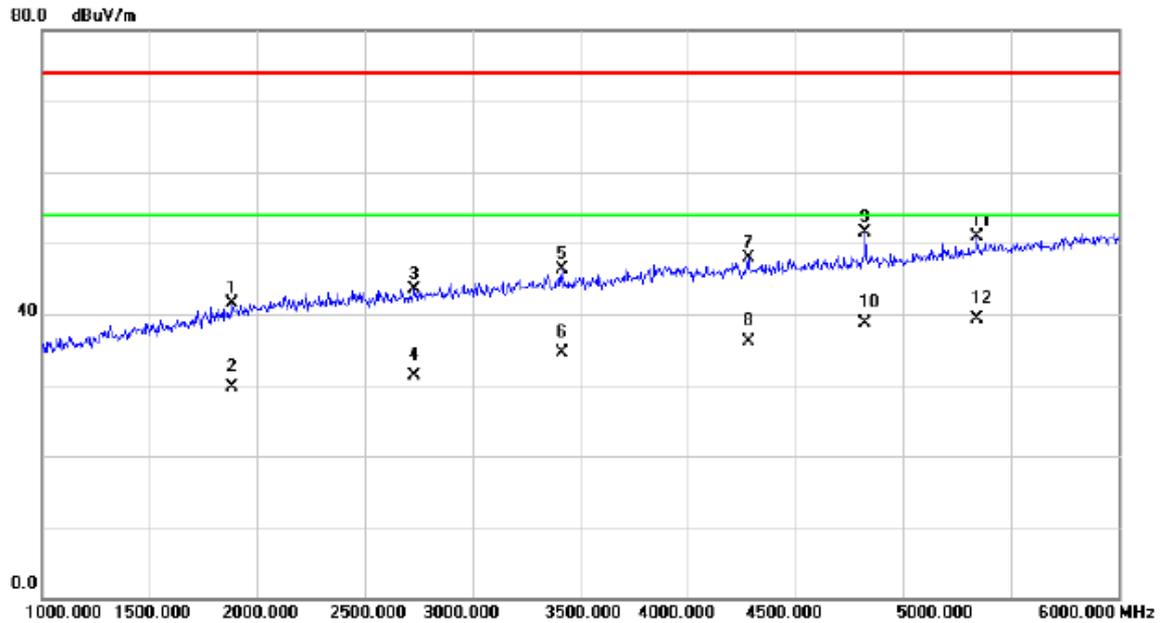

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1885.000	43.95	-2.38	41.57	74.00	-32.43	peak	
2		1885.000	32.18	-2.38	29.80	54.00	-24.20	AVG	
3		2730.000	42.67	0.90	43.57	74.00	-30.43	peak	
4		2730.000	30.48	0.90	31.38	54.00	-22.62	AVG	
5		3415.000	43.48	2.80	46.28	74.00	-27.72	peak	
6		3415.000	31.70	2.80	34.50	54.00	-19.50	AVG	
7		4280.000	41.11	6.79	47.90	74.00	-26.10	peak	
8		4280.000	29.32	6.79	36.11	54.00	-17.89	AVG	
9		4825.000	44.02	7.39	51.41	74.00	-22.59	peak	
10		4825.000	31.35	7.39	38.74	54.00	-15.26	AVG	
11		5340.000	42.28	8.66	50.94	74.00	-23.06	peak	
12	*	5340.000	30.61	8.66	39.27	54.00	-14.73	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

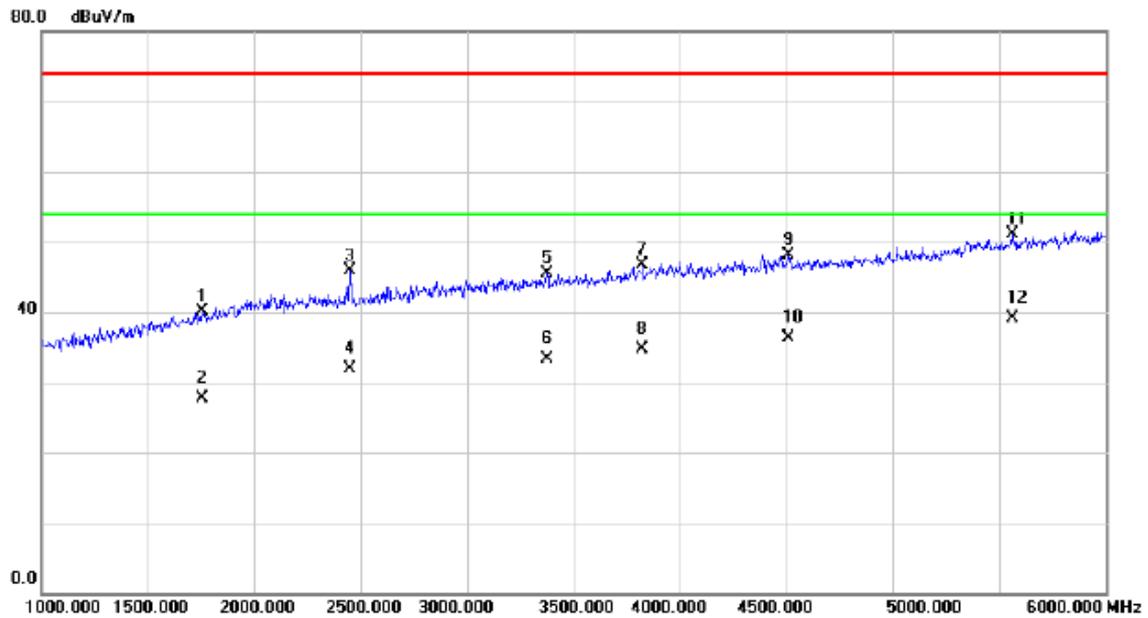

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1755.000	43.10	-2.96	40.14	74.00	-33.86	peak	
2		1755.000	30.73	-2.96	27.77	54.00	-26.23	AVG	
3		2450.000	45.95	-0.11	45.84	74.00	-28.16	peak	
4		2450.000	32.01	-0.11	31.90	54.00	-22.10	AVG	
5		3375.000	42.84	2.71	45.55	74.00	-28.45	peak	
6		3375.000	30.51	2.71	33.22	54.00	-20.78	AVG	
7		3825.000	41.32	5.35	46.67	74.00	-27.33	peak	
8		3825.000	29.41	5.35	34.76	54.00	-19.24	AVG	
9		4510.000	41.25	6.94	48.19	74.00	-25.81	peak	
10		4510.000	29.36	6.94	36.30	54.00	-17.70	AVG	
11		5560.000	41.89	9.22	51.11	74.00	-22.89	peak	
12	*	5560.000	29.94	9.22	39.16	54.00	-14.84	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (GSM)+ Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal

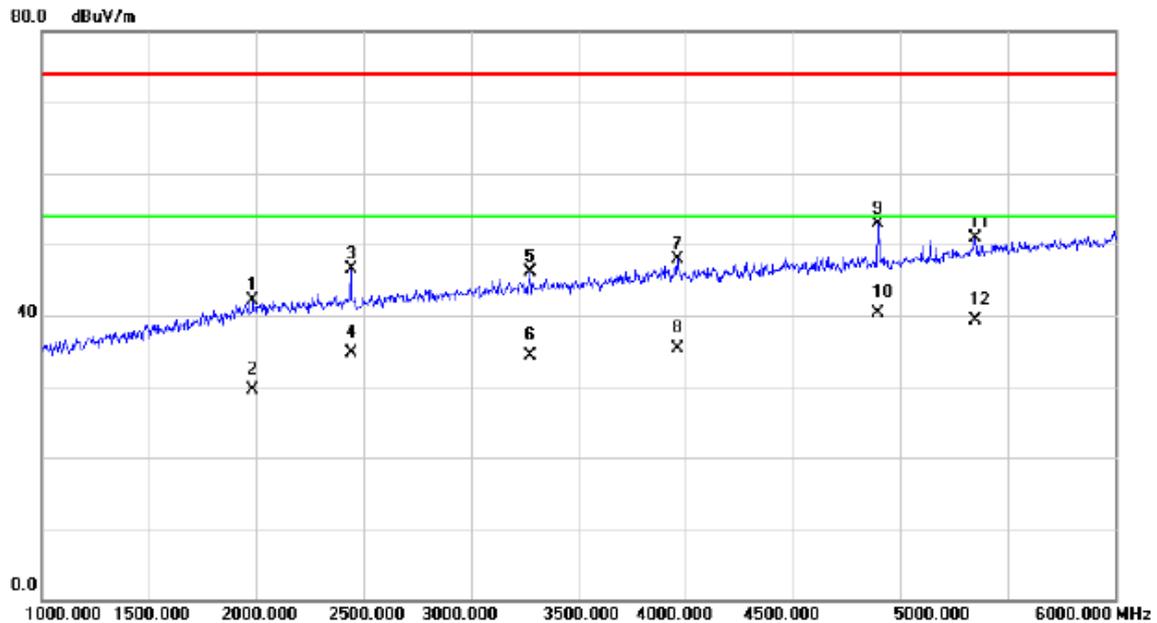

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1985.000	44.02	-1.95	42.07	74.00	-31.93	peak	
2		1985.000	31.51	-1.95	29.56	54.00	-24.44	AVG	
3		2440.000	46.71	-0.16	46.55	74.00	-27.45	peak	
4		2440.000	34.82	-0.16	34.66	54.00	-19.34	AVG	
5		3275.000	43.59	2.48	46.07	74.00	-27.93	peak	
6		3275.000	31.76	2.48	34.24	54.00	-19.76	AVG	
7		3960.000	41.55	6.33	47.88	74.00	-26.12	peak	
8		3960.000	29.06	6.33	35.39	54.00	-18.61	AVG	
9		4895.000	45.37	7.48	52.85	74.00	-21.15	peak	
10	*	4895.000	32.83	7.48	40.31	54.00	-13.69	AVG	
11		5350.000	42.17	8.69	50.86	74.00	-23.14	peak	
12		5350.000	30.69	8.69	39.38	54.00	-14.62	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

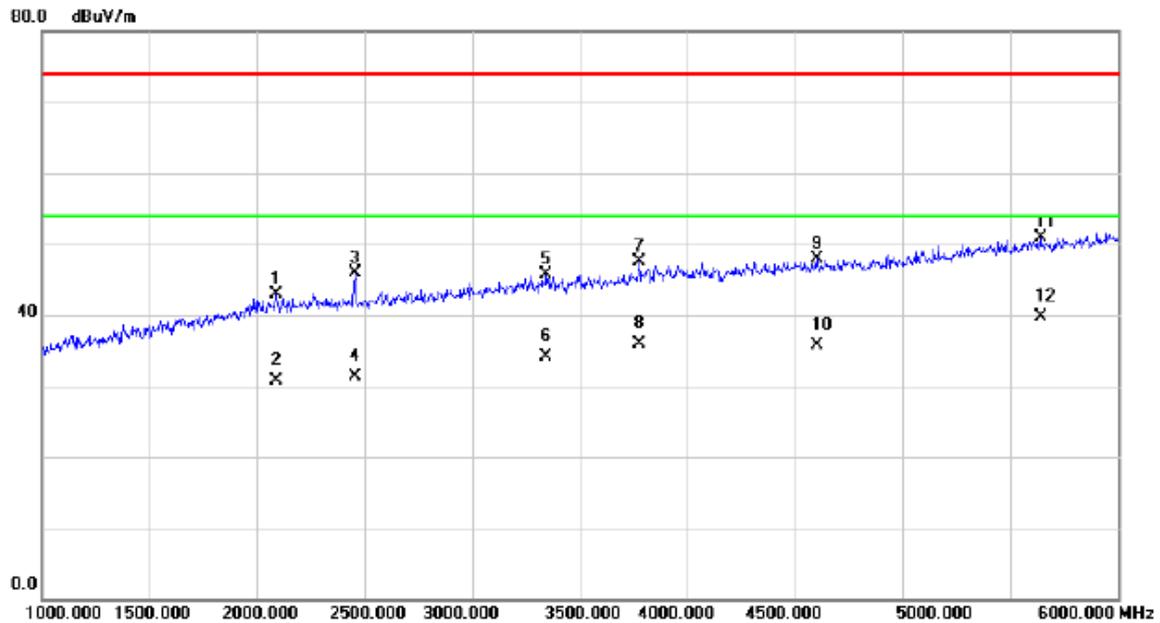

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2090.000	44.34	-1.52	42.82	74.00	-31.18	peak	
2		2090.000	32.29	-1.52	30.77	54.00	-23.23	AVG	
3		2455.000	45.92	-0.09	45.83	74.00	-28.17	peak	
4		2455.000	31.44	-0.09	31.35	54.00	-22.65	AVG	
5		3345.000	43.00	2.64	45.64	74.00	-28.36	peak	
6		3345.000	31.43	2.64	34.07	54.00	-19.93	AVG	
7		3775.000	42.50	4.99	47.49	74.00	-26.51	peak	
8		3775.000	31.01	4.99	36.00	54.00	-18.00	AVG	
9		4600.000	40.79	7.07	47.86	74.00	-26.14	peak	
10		4600.000	28.71	7.07	35.78	54.00	-18.22	AVG	
11		5640.000	41.56	9.31	50.87	74.00	-23.13	peak	
12	*	5640.000	30.33	9.31	39.64	54.00	-14.36	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (WCDMA)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal

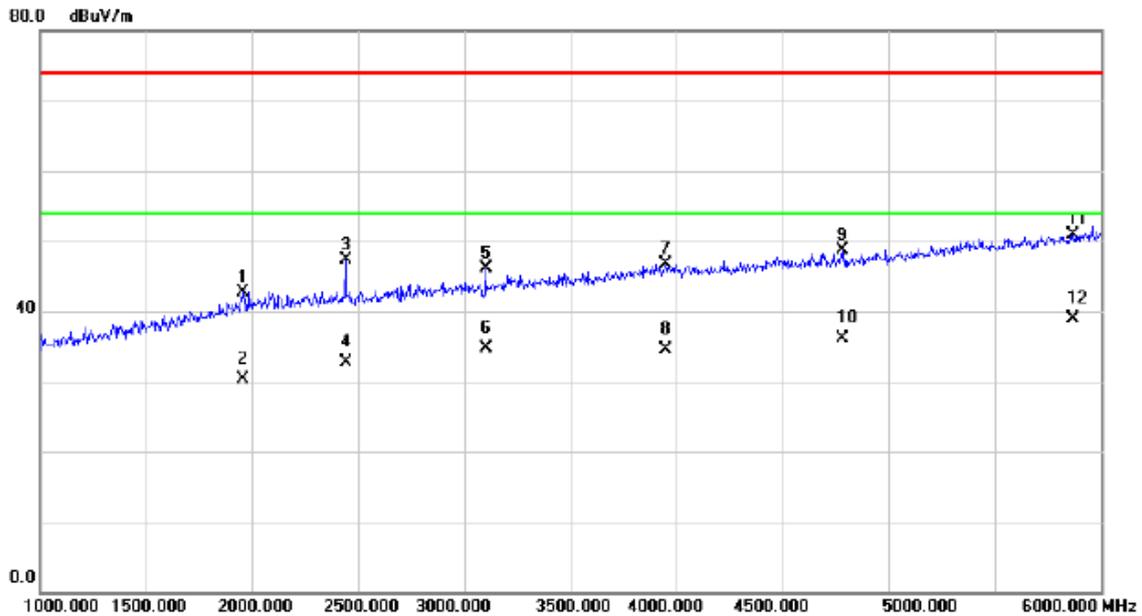

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1955.000	44.70	-2.08	42.62	74.00	-31.38	peak	
2		1955.000	32.38	-2.08	30.30	54.00	-23.70	AVG	
3		2440.000	47.55	-0.16	47.39	74.00	-26.61	peak	
4		2440.000	32.78	-0.16	32.62	54.00	-21.38	AVG	
5		3100.000	44.06	2.07	46.13	74.00	-27.87	peak	
6		3100.000	32.63	2.07	34.70	54.00	-19.30	AVG	
7		3950.000	40.54	6.26	46.80	74.00	-27.20	peak	
8		3950.000	28.21	6.26	34.47	54.00	-19.53	AVG	
9		4785.000	41.33	7.34	48.67	74.00	-25.33	peak	
10		4785.000	28.74	7.34	36.08	54.00	-17.92	AVG	
11		5870.000	41.34	9.59	50.93	74.00	-23.07	peak	
12	*	5870.000	29.35	9.59	38.94	54.00	-15.06	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

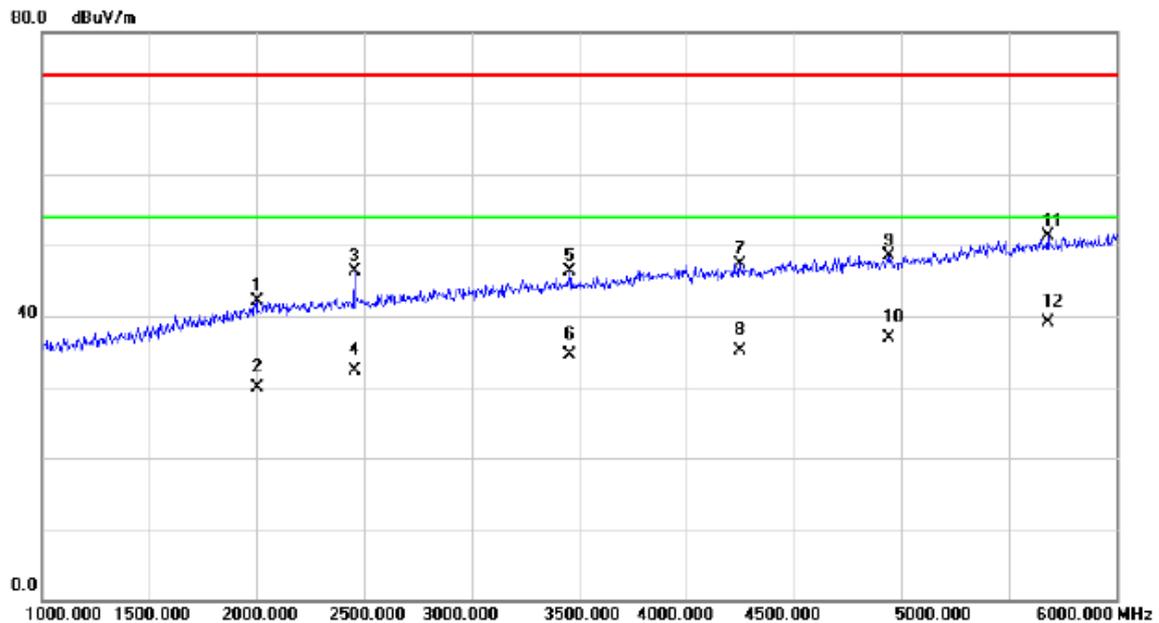

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2000.000	44.03	-1.88	42.15	74.00	-31.85	peak	
2		2000.000	31.88	-1.88	30.00	54.00	-24.00	AVG	
3		2455.000	46.32	-0.09	46.23	74.00	-27.77	peak	
4		2455.000	32.44	-0.09	32.35	54.00	-21.65	AVG	
5		3455.000	43.48	2.89	46.37	74.00	-27.63	peak	
6		3455.000	31.70	2.89	34.59	54.00	-19.41	AVG	
7		4250.000	40.55	6.77	47.32	74.00	-26.68	peak	
8		4250.000	28.36	6.77	35.13	54.00	-18.87	AVG	
9		4945.000	41.03	7.56	48.59	74.00	-25.41	peak	
10		4945.000	29.26	7.56	36.82	54.00	-17.18	AVG	
11		5680.000	41.89	9.36	51.25	74.00	-22.75	peak	
12	*	5680.000	29.72	9.36	39.08	54.00	-14.92	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal

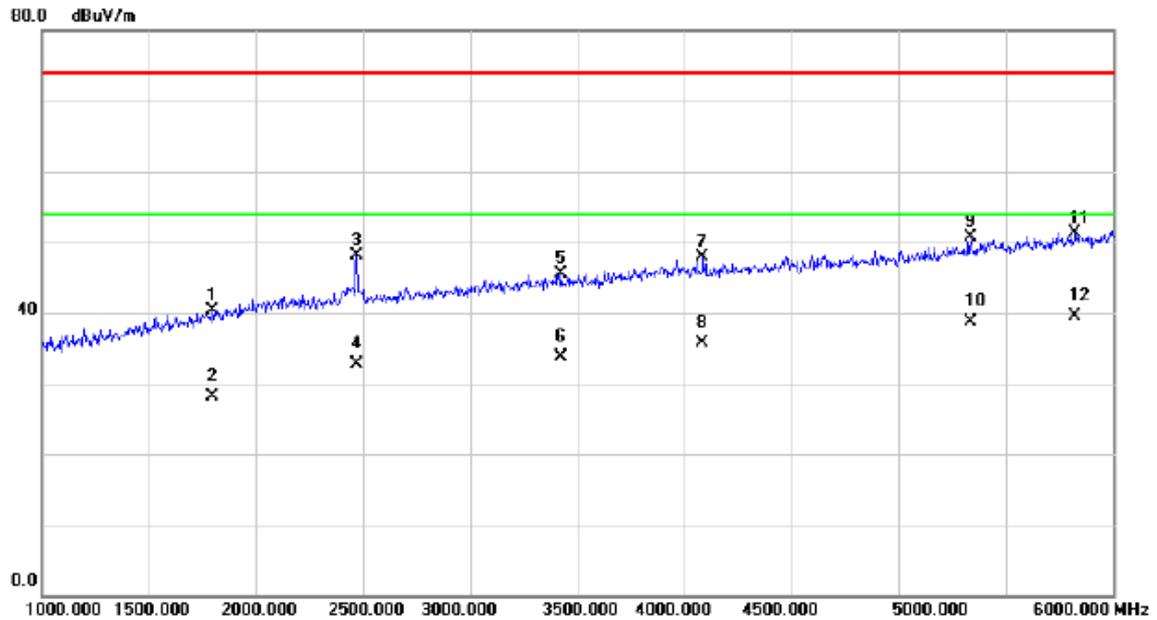

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1795.000	43.15	-2.77	40.38	74.00	-33.62	peak	
2		1795.000	30.88	-2.77	28.11	54.00	-25.89	AVG	
3		2470.000	48.11	-0.03	48.08	74.00	-25.92	peak	
4		2470.000	32.76	-0.03	32.73	54.00	-21.27	AVG	
5		3425.000	42.65	2.83	45.48	74.00	-28.52	peak	
6		3425.000	30.84	2.83	33.67	54.00	-20.33	AVG	
7		4085.000	41.22	6.68	47.90	74.00	-26.10	peak	
8		4085.000	28.94	6.68	35.62	54.00	-18.38	AVG	
9		5335.000	41.98	8.64	50.62	74.00	-23.38	peak	
10		5335.000	30.03	8.64	38.67	54.00	-15.33	AVG	
11		5825.000	41.82	9.54	51.36	74.00	-22.64	peak	
12	*	5825.000	30.03	9.54	39.57	54.00	-14.43	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug) / Liansheng USB cable / Feimaotui Lithium Battery


Vertical

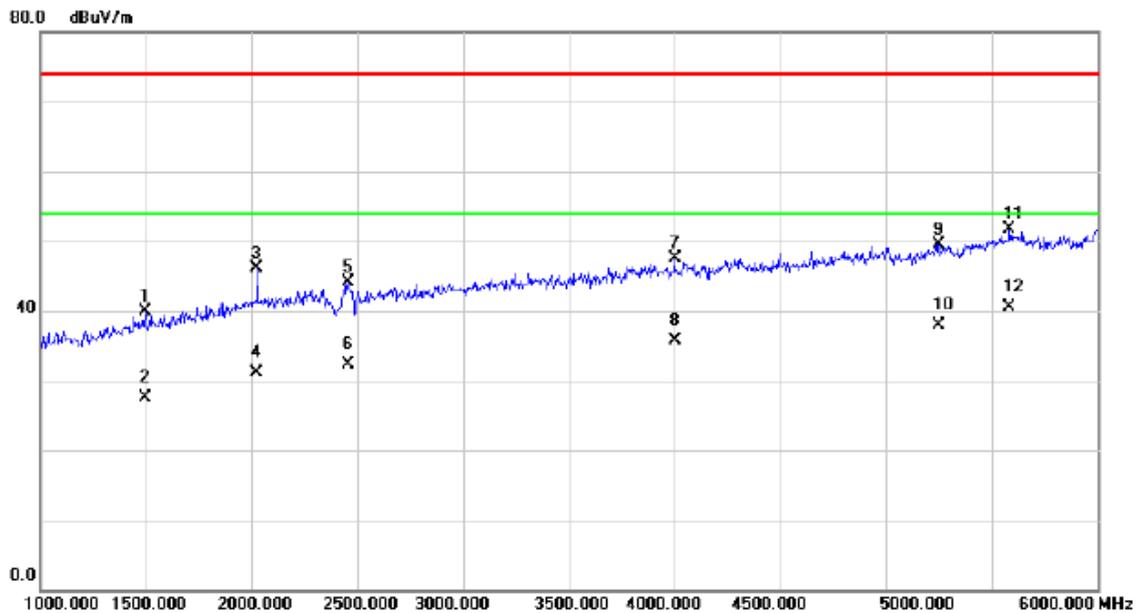

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	44.04	-4.08	39.96	74.00	-34.04	peak	
2		1495.000	31.61	-4.08	27.53	54.00	-26.47	AVG	
3		2025.000	47.96	-1.78	46.18	74.00	-27.82	peak	
4		2025.000	32.87	-1.78	31.09	54.00	-22.91	AVG	
5		2455.000	44.20	-0.09	44.11	74.00	-29.89	peak	
6		2455.000	32.34	-0.09	32.25	54.00	-21.75	AVG	
7		4000.000	40.79	6.62	47.41	74.00	-26.59	peak	
8		4000.000	29.08	6.62	35.70	54.00	-18.30	AVG	
9		5250.000	41.12	8.39	49.51	74.00	-24.49	peak	
10		5250.000	29.55	8.39	37.94	54.00	-16.06	AVG	
11		5585.000	42.49	9.24	51.73	74.00	-22.27	peak	
12	*	5585.000	31.17	9.24	40.41	54.00	-13.59	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: BYD(EU Plug) / Liansheng USB cable / Feimaotui Lithium Battery


Horizontal

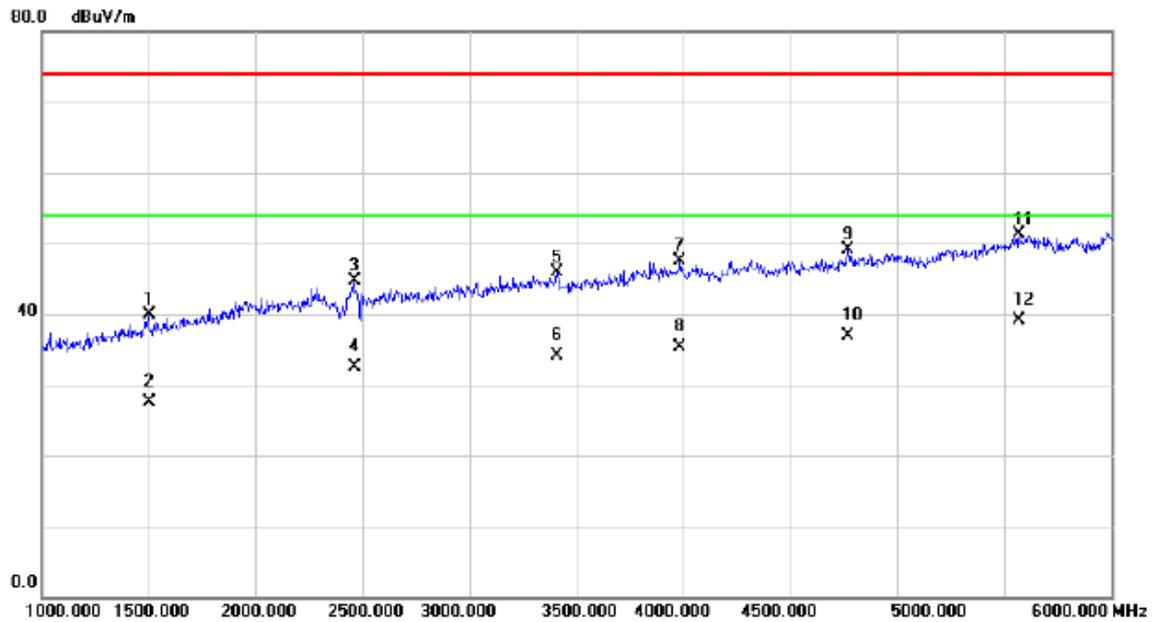

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1500.000	44.06	-4.06	40.00	74.00	-34.00	peak	
2		1500.000	31.65	-4.06	27.59	54.00	-26.41	AVG	
3		2460.000	44.78	-0.08	44.70	74.00	-29.30	peak	
4		2460.000	32.54	-0.08	32.46	54.00	-21.54	AVG	
5		3410.000	43.15	2.79	45.94	74.00	-28.06	peak	
6		3410.000	31.38	2.79	34.17	54.00	-19.83	AVG	
7		3985.000	41.04	6.51	47.55	74.00	-26.45	peak	
8		3985.000	28.89	6.51	35.40	54.00	-18.60	AVG	
9		4770.000	41.89	7.31	49.20	74.00	-24.80	peak	
10		4770.000	29.63	7.31	36.94	54.00	-17.06	AVG	
11		5570.000	42.10	9.23	51.33	74.00	-22.67	peak	
12	*	5570.000	29.89	9.23	39.12	54.00	-14.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug) / Pengyi USB cable / Feimaotui Lithium Battery


Vertical

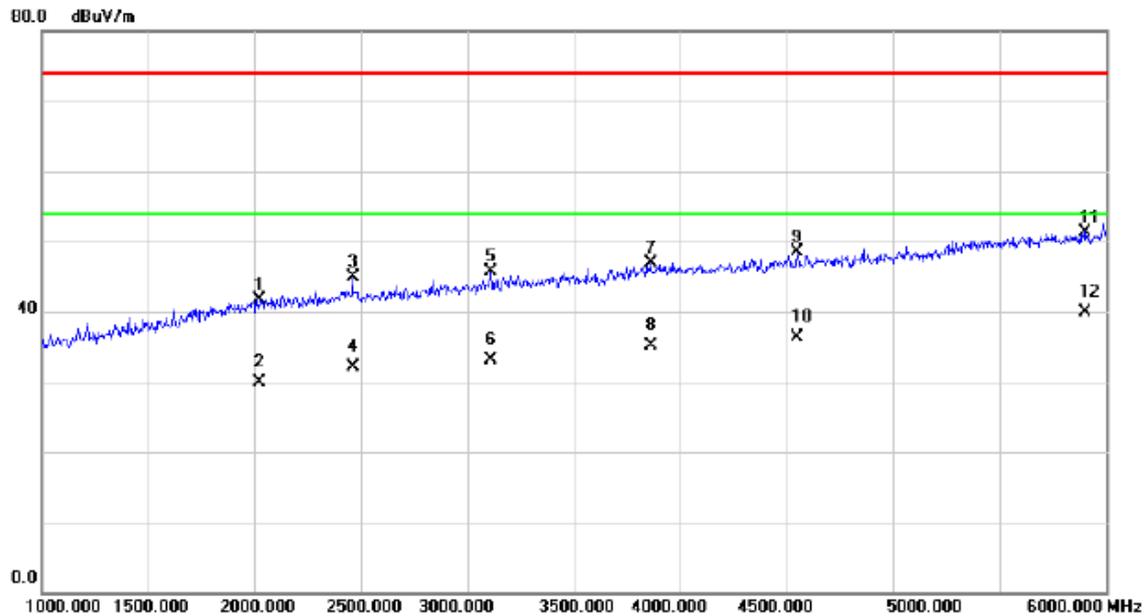

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2025.000	43.54	-1.78	41.76	74.00	-32.24	peak	
2		2025.000	31.71	-1.78	29.93	54.00	-24.07	AVG	
3		2460.000	45.03	-0.08	44.95	74.00	-29.05	peak	
4		2460.000	32.20	-0.08	32.12	54.00	-21.88	AVG	
5		3110.000	43.52	2.10	45.62	74.00	-28.38	peak	
6		3110.000	31.01	2.10	33.11	54.00	-20.89	AVG	
7		3860.000	41.39	5.61	47.00	74.00	-27.00	peak	
8		3860.000	29.54	5.61	35.15	54.00	-18.85	AVG	
9		4550.000	41.47	6.99	48.46	74.00	-25.54	peak	
10		4550.000	29.24	6.99	36.23	54.00	-17.77	AVG	
11		5900.000	41.77	9.63	51.40	74.00	-22.60	peak	
12	*	5900.000	30.35	9.63	39.98	54.00	-14.02	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: HK(EU Plug) / Pengyi USB cable / Feimaotui Lithium Battery


Horizontal

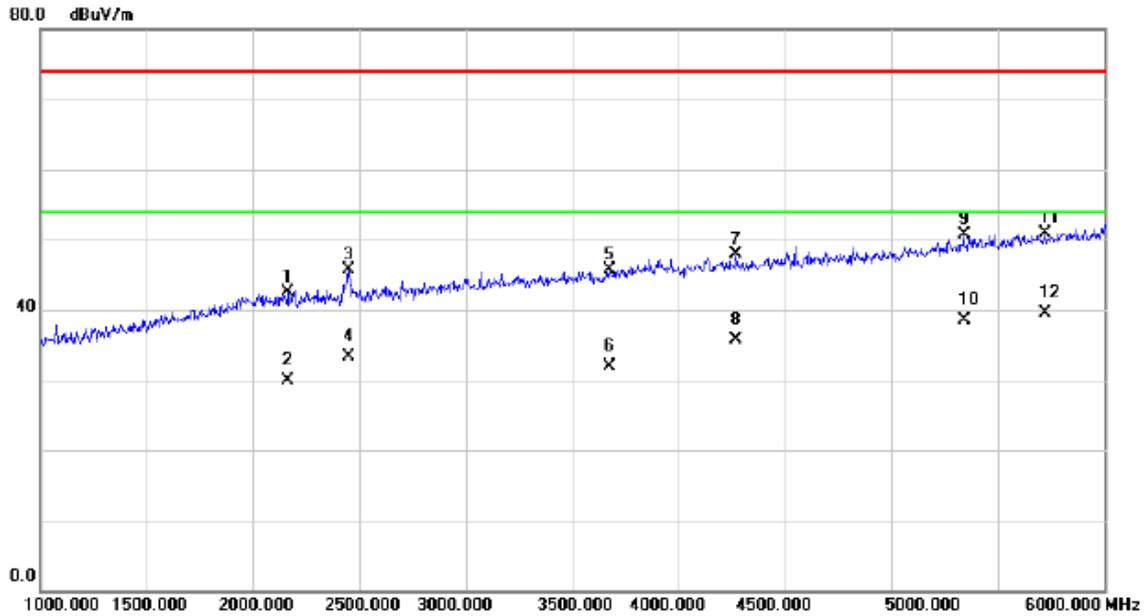

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2165.000	43.69	-1.24	42.45	74.00	-31.55	peak	
2	2165.000	31.15	-1.24	29.91	54.00	-24.09	AVG	
3	2450.000	45.77	-0.11	45.66	74.00	-28.34	peak	
4	2450.000	33.33	-0.11	33.22	54.00	-20.78	AVG	
5	3675.000	41.35	4.27	45.62	74.00	-28.38	peak	
6	3675.000	27.68	4.27	31.95	54.00	-22.05	AVG	
7	4270.000	41.03	6.78	47.81	74.00	-26.19	peak	
8	4270.000	28.94	6.78	35.72	54.00	-18.28	AVG	
9	5340.000	42.09	8.66	50.75	74.00	-23.25	peak	
10	5340.000	29.81	8.66	38.47	54.00	-15.53	AVG	
11	5720.000	41.46	9.41	50.87	74.00	-23.13	peak	
12 *	5720.000	30.10	9.41	39.51	54.00	-14.49	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek(EU Plug) / kangrui USB cable / Feimaotui Lithium Battery


Vertical

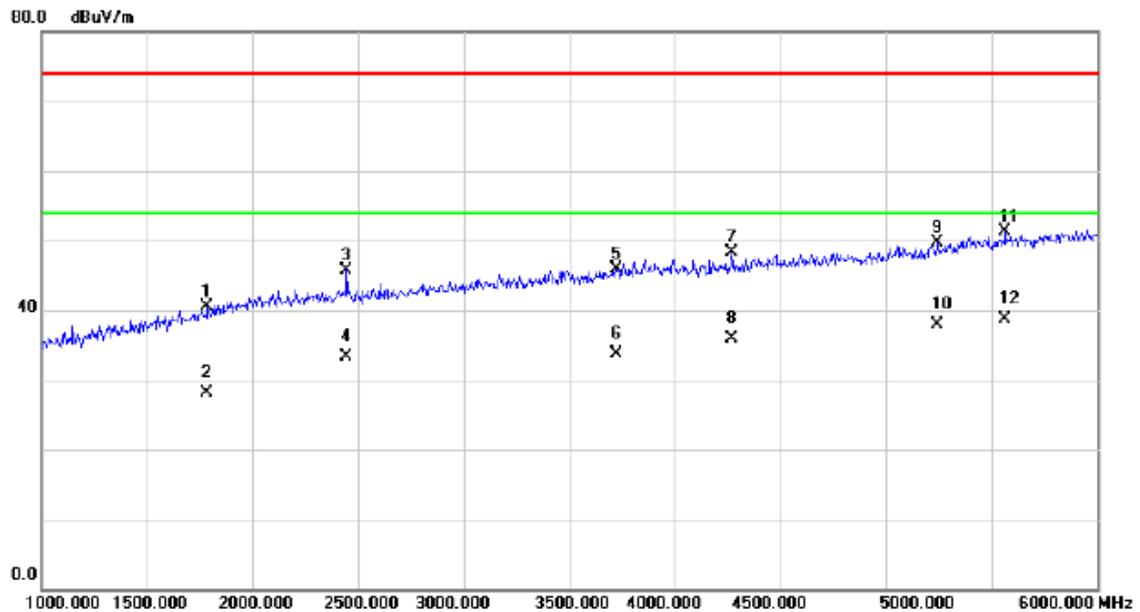

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1785.000	43.33	-2.82	40.51	74.00	-33.49	peak	
2	1785.000	30.84	-2.82	28.02	54.00	-25.98	AVG	
3	2445.000	45.94	-0.14	45.80	74.00	-28.20	peak	
4	2445.000	33.37	-0.14	33.23	54.00	-20.77	AVG	
5	3720.000	41.33	4.60	45.93	74.00	-28.07	peak	
6	3720.000	29.01	4.60	33.61	54.00	-20.39	AVG	
7	4270.000	41.59	6.78	48.37	74.00	-25.63	peak	
8	4270.000	29.08	6.78	35.86	54.00	-18.14	AVG	
9	5245.000	41.25	8.37	49.62	74.00	-24.38	peak	
10	5245.000	29.59	8.37	37.96	54.00	-16.04	AVG	
11	5565.000	42.14	9.22	51.36	74.00	-22.64	peak	
12 *	5565.000	29.56	9.22	38.78	54.00	-15.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek(EU Plug) / kangrui USB cable / Feimaotui Lithium Battery


Horizontal

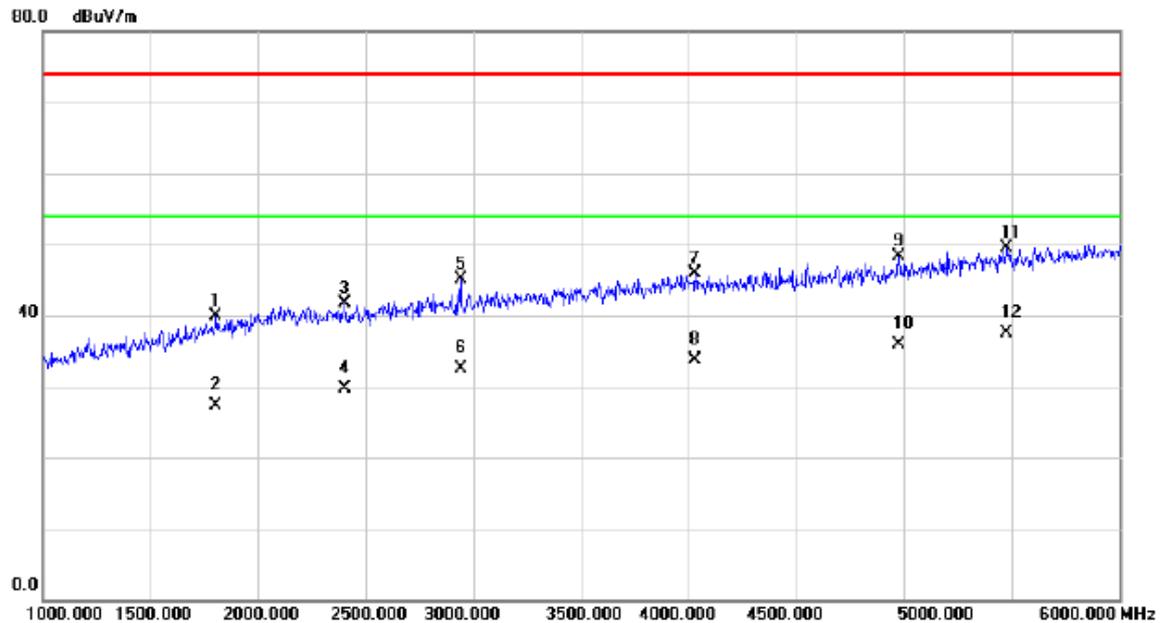

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	1805.000	42.64	-2.74	39.90	74.00	-34.10	peak	
2	1805.000	29.97	-2.74	27.23	54.00	-26.77	AVG	
3	2405.000	41.96	-0.28	41.68	74.00	-32.32	peak	
4	2405.000	29.91	-0.28	29.63	54.00	-24.37	AVG	
5	2940.000	43.45	1.63	45.08	74.00	-28.92	peak	
6	2940.000	30.97	1.63	32.60	54.00	-21.40	AVG	
7	4030.000	39.36	6.64	46.00	74.00	-28.00	peak	
8	4030.000	27.08	6.64	33.72	54.00	-20.28	AVG	
9	4975.000	40.65	7.60	48.25	74.00	-25.75	peak	
10	4975.000	28.31	7.60	35.91	54.00	-18.09	AVG	
11	5475.000	40.41	9.07	49.48	74.00	-24.52	peak	
12 *	5475.000	28.44	9.07	37.51	54.00	-16.49	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle / Liansheng USB cable / xinwangda Lithium Battery


Vertical

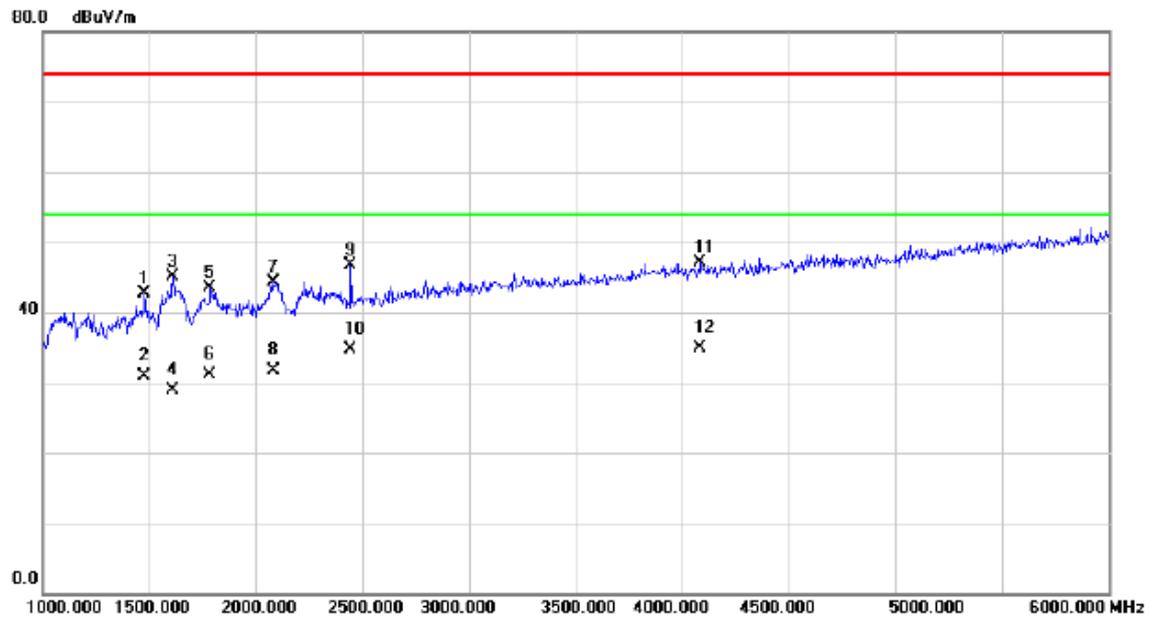

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1475.000	46.82	-4.14	42.68	74.00	-31.32	peak	
2		1475.000	35.13	-4.14	30.99	54.00	-23.01	AVG	
3		1610.000	48.64	-3.58	45.06	74.00	-28.94	peak	
4		1610.000	32.52	-3.58	28.94	54.00	-25.06	AVG	
5		1785.000	46.38	-2.82	43.56	74.00	-30.44	peak	
6		1785.000	33.85	-2.82	31.03	54.00	-22.97	AVG	
7		2080.000	45.92	-1.57	44.35	74.00	-29.65	peak	
8		2080.000	33.27	-1.57	31.70	54.00	-22.30	AVG	
9		2445.000	46.92	-0.14	46.78	74.00	-27.22	peak	
10		2445.000	34.81	-0.14	34.67	54.00	-19.33	AVG	
11		4085.000	40.45	6.68	47.13	74.00	-26.87	peak	
12	*	4085.000	28.13	6.68	34.81	54.00	-19.19	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB Copy(EUT with PC) +Earphone+idle / Liansheng USB cable / xinwangda Lithium Battery


Horizontal

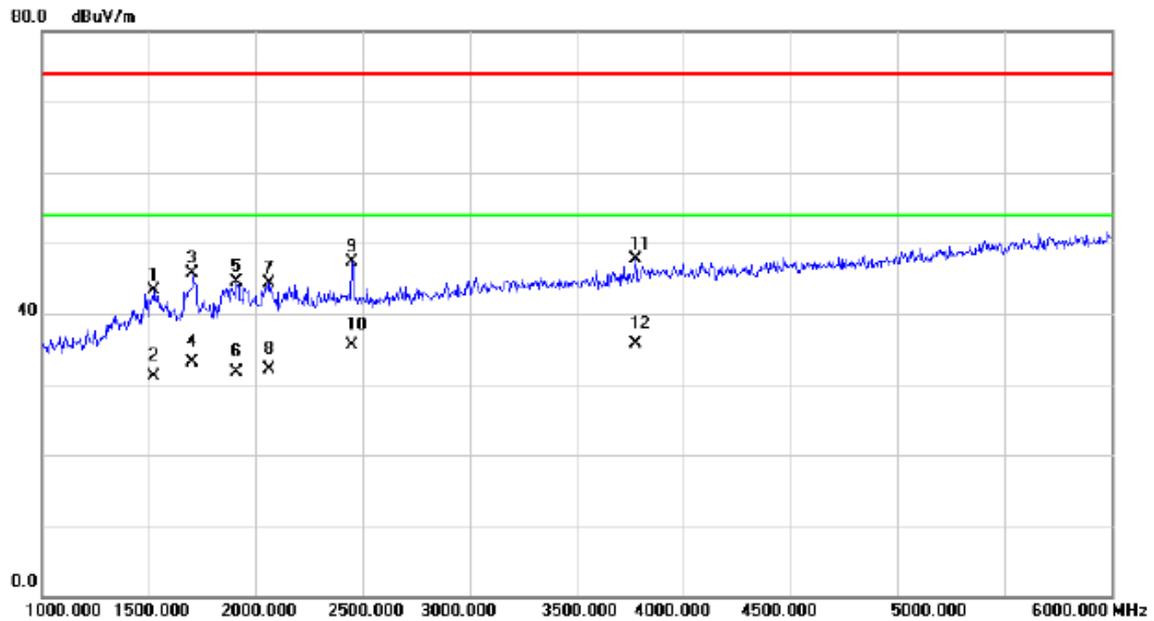

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1525.000	47.33	-3.96	43.37	74.00	-30.63	peak	
2		1525.000	35.05	-3.96	31.09	54.00	-22.91	AVG	
3		1705.000	48.79	-3.17	45.62	74.00	-28.38	peak	
4		1705.000	36.20	-3.17	33.03	54.00	-20.97	AVG	
5		1910.000	46.87	-2.27	44.60	74.00	-29.40	peak	
6		1910.000	34.02	-2.27	31.75	54.00	-22.25	AVG	
7		2065.000	45.92	-1.63	44.29	74.00	-29.71	peak	
8		2065.000	33.73	-1.63	32.10	54.00	-21.90	AVG	
9		2450.000	47.45	-0.11	47.34	74.00	-26.66	peak	
10		2450.000	35.56	-0.11	35.45	54.00	-18.55	AVG	
11		3775.000	42.81	4.99	47.80	74.00	-26.20	peak	
12	*	3775.000	30.68	4.99	35.67	54.00	-18.33	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

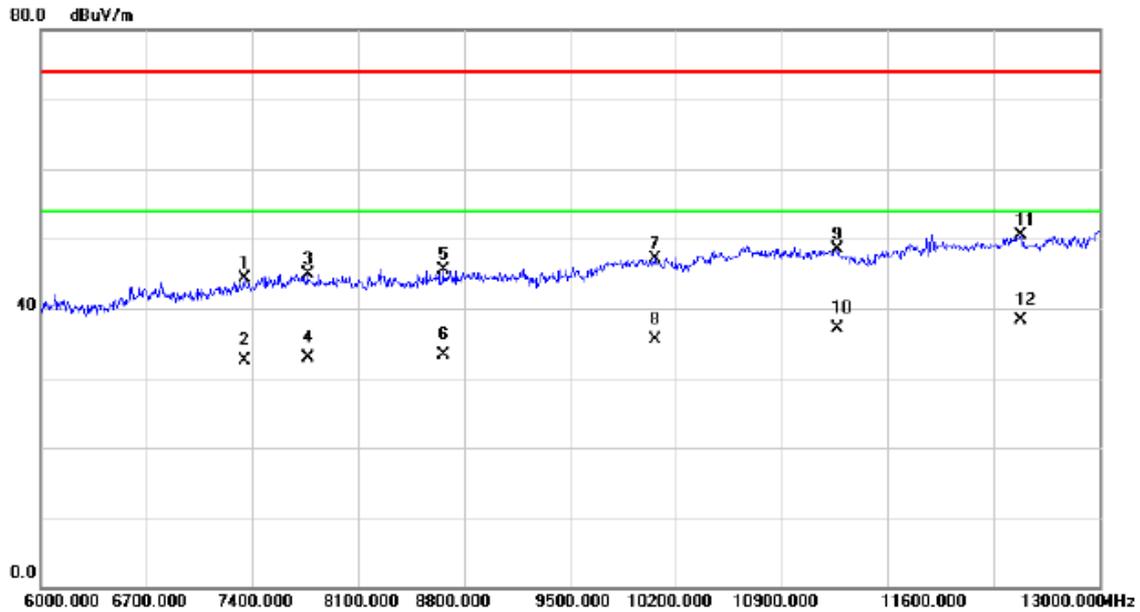

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7344.000	29.02	15.33	44.35	74.00	-29.65	peak	
2		7344.000	17.26	15.33	32.59	54.00	-21.41	AVG	
3		7764.000	28.94	16.03	44.97	74.00	-29.03	peak	
4		7764.000	16.81	16.03	32.84	54.00	-21.16	AVG	
5		8660.000	29.82	15.64	45.46	74.00	-28.54	peak	
6		8660.000	17.63	15.64	33.27	54.00	-20.73	AVG	
7		10060.00	31.31	15.81	47.12	74.00	-26.88	peak	
8		10060.00	19.62	15.81	35.43	54.00	-18.57	AVG	
9		11271.00	28.22	20.25	48.47	74.00	-25.53	peak	
10		11271.00	16.84	20.25	37.09	54.00	-16.91	AVG	
11		12482.00	32.66	17.88	50.54	74.00	-23.46	peak	
12	*	12482.00	20.38	17.88	38.26	54.00	-15.74	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+camera on+idle+wifi+bt+gps+Earphone
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Horizontal

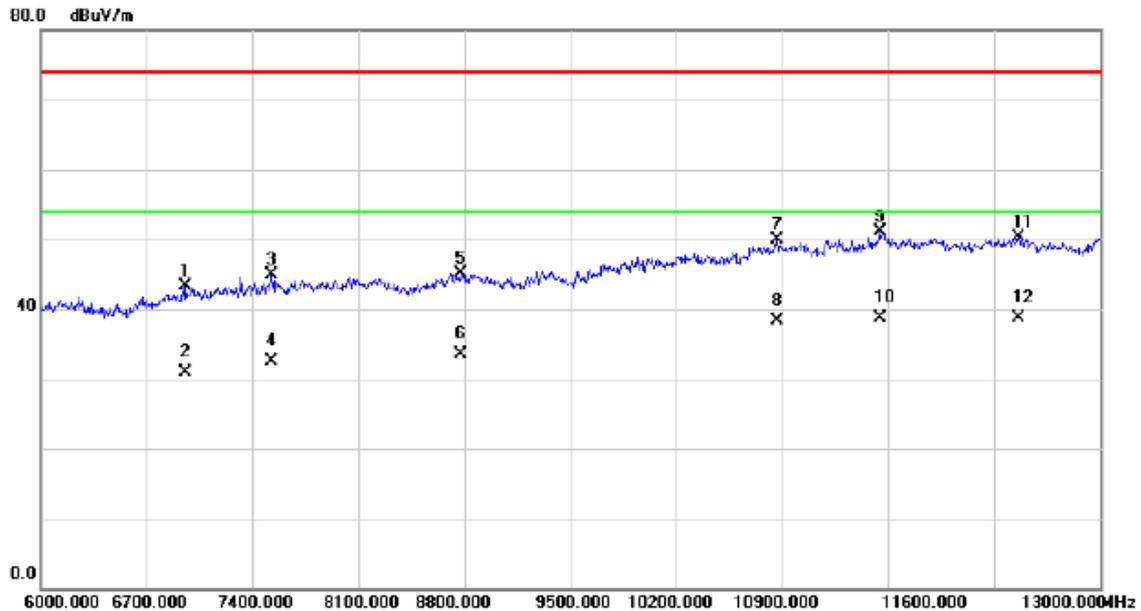

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6959.000	29.61	13.71	43.32	74.00	-30.68	peak	
2		6959.000	17.26	13.71	30.97	54.00	-23.03	AVG	
3		7526.000	28.93	15.99	44.92	74.00	-29.08	peak	
4		7526.000	16.54	15.99	32.53	54.00	-21.47	AVG	
5		8772.000	29.28	15.81	45.09	74.00	-28.91	peak	
6		8772.000	17.69	15.81	33.50	54.00	-20.50	AVG	
7		10865.00	31.34	18.65	49.99	74.00	-24.01	peak	
8		10865.00	19.62	18.65	38.27	54.00	-15.73	AVG	
9		11544.00	30.62	20.42	51.04	74.00	-22.96	peak	
10		11544.00	18.26	20.42	38.68	54.00	-15.32	AVG	
11		12461.00	32.20	18.12	50.32	74.00	-23.68	peak	
12	*	12461.00	20.68	18.12	38.80	54.00	-15.20	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery


Vertical

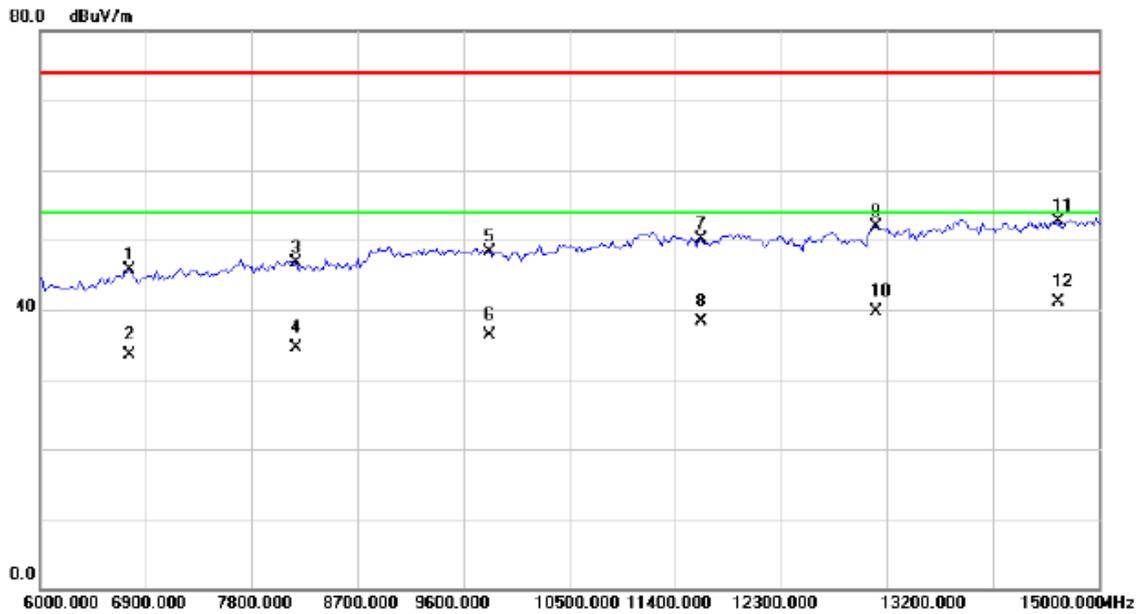

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6765.000	32.72	12.94	45.66	74.00	-28.34	peak	
2		6765.000	20.58	12.94	33.52	54.00	-20.48	AVG	
3		8182.500	30.79	15.84	46.63	74.00	-27.37	peak	
4		8182.500	18.69	15.84	34.53	54.00	-19.47	AVG	
5		9825.000	32.56	15.75	48.31	74.00	-25.69	peak	
6		9825.000	20.63	15.75	36.38	54.00	-17.62	AVG	
7		11625.000	29.10	20.93	50.03	74.00	-23.97	peak	
8		11625.000	17.42	20.93	38.35	54.00	-15.65	AVG	
9		13110.000	29.86	22.06	51.92	74.00	-22.08	peak	
10		13110.000	17.68	22.06	39.74	54.00	-14.26	AVG	
11		14662.500	27.07	25.70	52.77	74.00	-21.23	peak	
12	*	14662.500	15.44	25.70	41.14	54.00	-12.86	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+ Traffic (LTE)
Note:	Adapter: Phitek / kangrui USB cable / xingwangda Lithium Battery

Horizontal

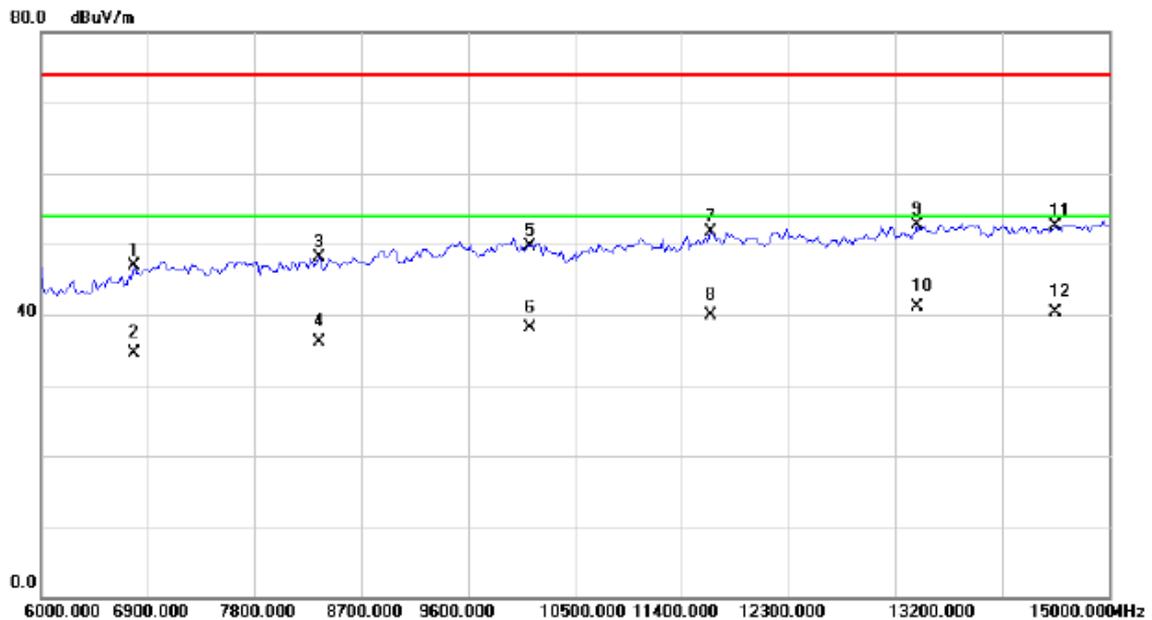

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		6787.500	33.89	13.04	46.93	74.00	-27.07	peak	
2		6787.500	21.51	13.04	34.55	54.00	-19.45	AVG	
3		8340.000	32.48	15.61	48.09	74.00	-25.91	peak	
4		8340.000	20.58	15.61	36.19	54.00	-17.81	AVG	
5		10117.500	34.14	15.57	49.71	74.00	-24.29	peak	
6		10117.500	22.54	15.57	38.11	54.00	-15.89	AVG	
7		11647.500	30.68	21.07	51.75	74.00	-22.25	peak	
8		11647.500	18.92	21.07	39.99	54.00	-14.01	AVG	
9		13380.000	30.23	22.47	52.70	74.00	-21.30	peak	
10	*	13380.000	18.64	22.47	41.11	54.00	-12.89	AVG	
11		14550.000	26.49	25.93	52.42	74.00	-21.58	peak	
12		14550.000	14.37	25.93	40.30	54.00	-13.70	AVG	