

Prüfbericht-Nr.: <i>Test Report No.:</i>	17046566 001	Auftrags-Nr.: <i>Order No.:</i>	164028994	Seite 1 von 29 <i>Page 1 of 29</i>	
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	08.01.2015		
Auftraggeber: <i>Client:</i>	Huawei Technologies Co., Ltd, Administration Building, Headquarters of huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen 518129, P.R. China				
Prüfgegenstand: <i>Test item:</i>	TalkBand				
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	B2				
Auftrags-Inhalt: <i>Order content:</i>	FCC Certification and Verification				
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 15: Subpart C Section 15.107 CFR47 FCC Part 15: Subpart C Section 15.109 RSS-210 Issue 8 December 2010 RSS-Gen Issue 3 December 2010 RSS-102 Issue 4 March 2010				
Wareneingangsdatum: <i>Date of receipt:</i>	22.01.2015				
Prüfmuster-Nr.: <i>Test sample No.:</i>	A000157643-001 to 003				
Prüfzeitraum: <i>Testing period:</i>	27.01.2015 - 02.02.2015				
Ort der Prüfung: <i>Place of testing:</i>	Shenzhen Accurate Technology Co., Ltd.				
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.				
Prüfergebnis*: <i>Test result*:</i>	Bitte wählen / Please select...				
geprüft von / tested by:	<i>Owen Tian</i>	kontrolliert von / reviewed by:	<i>Winnie Hou</i>		
12.01.2015	Owen Tian / Senior Project Manager	25.02.2015	Winnie Hou / Technical Certifier		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>
Sonstiges / Other:					
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
<p>* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet</p> <p>Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested</p>					
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>					

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT*RESULT: Passed***5.1.2 PEAK OUTPUT POWER***RESULT: Passed***5.1.3 20dB BANDWIDTH***RESULT: Passed***5.1.4 99% BANDWIDTH***RESULT: Passed***5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100KHZ BANDWIDTH***RESULT: Passed***5.1.6 SPURIOUS EMISSION***RESULT: Passed***5.1.7 FREQUENCY SEPARATION***RESULT: Passed***5.1.8 NUMBER OF HOPPING FREQUENCY***RESULT: Passed***5.1.9 TIME OF OCCUPANCY***RESULT: Passed***5.1.10 CONDUCTED EMISSIONS***RESULT: Passed***5.1.11 RADIATED EMISSION***RESULT: Passed*

Contents

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3.	GENERAL PRODUCT INFORMATION	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS	7
3.3	INDEPENDENT OPERATION MODES	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
3.5	SUBMITTED DOCUMENTS	9
4.	TEST SET-UP AND OPERATION MODES	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	11
4.5	TEST SETUP DIAGRAM.....	11
5.	TEST RESULTS	13
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	13
5.1.1	<i>Antenna Requirement</i>	<i>13</i>
5.1.2	<i>Peak Output Power.....</i>	<i>14</i>
5.1.3	<i>20dB Bandwidth</i>	<i>15</i>
5.1.4	<i>99% Bandwidth</i>	<i>16</i>
5.1.5	<i>Conducted spurious emissions measured in 100kHz Bandwidth</i>	<i>17</i>
5.1.6	<i>Spurious Emission</i>	<i>18</i>
5.1.7	<i>Frequency Separation.....</i>	<i>19</i>
5.1.8	<i>Number of hopping frequency.....</i>	<i>20</i>
5.1.9	<i>Time of Occupancy</i>	<i>21</i>
5.1.10	<i>Conducted emissions</i>	<i>23</i>
5.1.11	<i>Radiated Emission.....</i>	<i>24</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	25
7.	LIST OF TABLES	29
8.	LIST OF PHOTOGRAPHS	29

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test Result

2. Test Sites

2.1 Test Facilities

Shenzhen Accurate Technology Co., Ltd.

F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China

FCC Registration No.: 752051

The tests at the test site have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
Spurious emission and Radiated emission				
Spectrum Analyzer	Rohde&Schwarz	FSV40	101495	2016-01-09
Test Receiver	Rohde&Schwarz	ESCS30	100307	2016-01-09
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2016-01-09
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2016-01-09
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2016-01-09
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	2016-01-09
RF Switching Unit+PreAMP	Compliance Direction	RSU-M2	38322	2016-01-09
Pre-Amplifier	Rohde&Schwarz	CBLU11835 40-01	3791	2016-01-09
Radio Test Suite				
Spectrum Analyzer	Rohde & Schwarz	FSV40	101495	2016-01-09
Conducted Emission				
Test Receiver	Rohde & Schwarz	ESCS30	100307	2016-01-09
L.I.S.N.	Schwarzbeck	NLSK8126	8126431	2016-01-09
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	2016-01-09
50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	2016-01-09

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are $\pm 3\text{dB}$.

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The Shenzhen Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a TalkBand with Bluetooth wireless technology.
For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Rating of EUT

Kind of Equipment:	TalkBand
Type Designation:	B2
FCC ID	QISB2
IC	6369A-B2

Table 3: Technical Specification of EUT

Technical Specification	Value
Operating Frequency band	2402 – 2480 MHz
Channel separation	1MHz
Extreme Temperature Range	0°C to +35°C
Operation Voltage	DC3.7V via lithium Battery
Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth core version	3.0
Antenna Gain	1.4dBi

Table 4: Frequency hopping information

Technical Specification	Description
Hopping Range	Hereby we declare that the maximum frequency of this device is: 2402-2480MHz. This is according the Bluetooth Core Specification V2.1+EDR for devices which will be operated in the USA. This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E).
Hopping Sequence	Example of a 79 hopping sequence in data mode: 33,04,21,44,23,42,53,46,55,48,40,59,72,29,76,31,08,73,07,75,09,45,60,39,58,13,47,11,77,52,35,50,65,54,67,56,69,62,71,64, 7,25,27,66,57,70,74,61,78,63,10,41,05,43,15,44,64,68,02,70,06,01,51,03,55,05,03,66,53,49,36,47,
Receiver input bandwidth	<p>The input bandwidth of the receiver is 1MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.</p> <p>Additionally the type of connection is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.</p> <p>Repeating of a packer has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case.</p> <p>That means a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.</p>

3.3 Independent Operation Modes

The basic operation modes are:

- A. Bluetooth Transmitting
 - 1. Lowest channel
 - 2. Middle channel
 - 3. Highest channel
- B. Bluetooth Receiving
- C. Charging
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Technical Description
- Circuit Diagram
- Instruction Manual
- Rating Label

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2003.

Due to models' description indicated in clause 3.1, full test was applied on models NS-SPBT02-Y and NS-SPBT02-BL only.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested with following accessories

Description	Manufacturer	Type	S/N
Mobile phone	SAMSUNG	GT-I9300	N/A
Notebook	Lenovo	4290-RT8	R9-FW93G
Printer	HP	HP laserjet 1015	CNFG030424

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

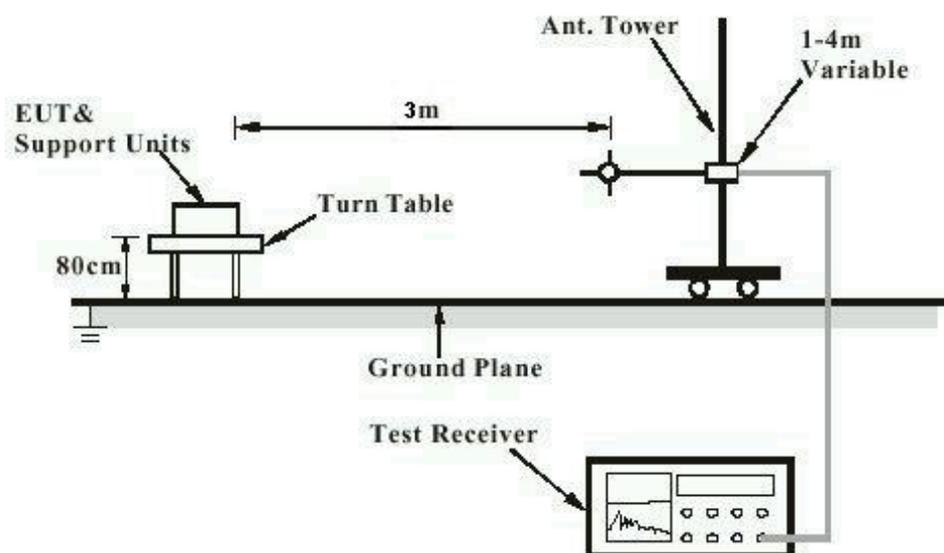


Diagram of Measurement Equipment Configuration for Mains Conduction Measurement


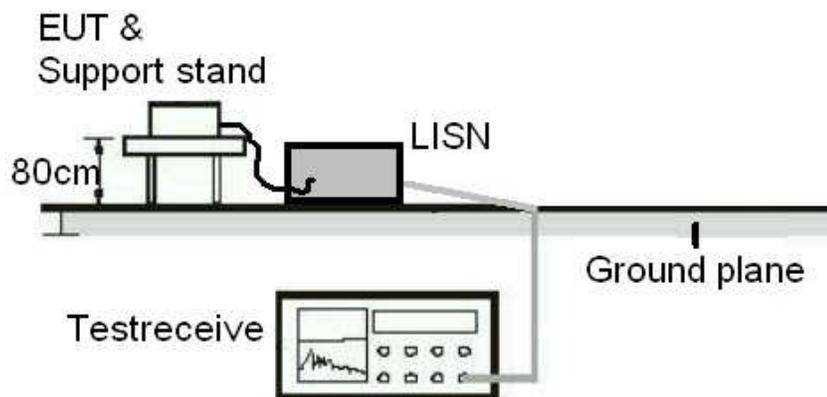


Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement

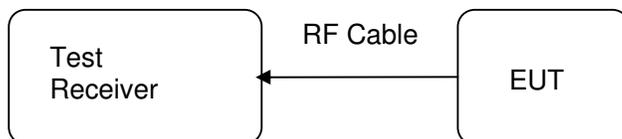

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Passed**

Test date	:	2015-02-02
Test standard	:	FCC Part 15.247(b)(4) and Part 15.203 RSS-Gen 7.1.4
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 1.4dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT photo for details.

5.1.4 99% Bandwidth

RESULT:
Passed

Date of testing : 2015-02-02
 Test standard : RSS-Gen clause 4.6.1
 Basic standard : ANSI C63.4: 2003
 Kind of test site : Shielded room

Test setup

Test Channel : Low/ Middle/ High
 Operation Mode : A
 Ambient temperature : 25°C
 Relative humidity : 55%
 Atmospheric pressure : 101 kPa

Table 9: Test result of 99% Bandwidth, GFSK modulation

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	946	/	Pass
Mid Channel	2441	951	/	Pass
High Channel	2480	942	/	Pass

Table 10: Test result of 99% Bandwidth, 8DPSK modulation

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)	Limit (MHz)	Result
Low Channel	2402	1194	/	Pass
Mid Channel	2441	1194	/	Pass
High Channel	2480	1194	/	Pass

5.1.5 Conducted spurious emissions measured in 100kHz Bandwidth

RESULT:**Passed**

Date of testing	:	2015-02-02
Test standard	:	FCC part 15.247(d) RSS-210 A8.5
Basic standard	:	ANSI C63.4: 2003
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	:	Shield room

Test setup

Test Channel	:	Low/ High
Operation mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

Remark: all emissions are more than 20dB below fundamental.

For details refer to Appendix 1.

5.1.6 Spurious Emission

RESULT:**Passed**

Date of testing : 2013-01-23 to 2015-02-02
Test standard : FCC part 15.247(d)
FCC Part 15.205
RSS-210 Clause 2.2
Basic standard : ANSI C63.4: 2003
Limits : Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Test Channel : Low/ Middle/ High
Operation mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Remark:

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test setup photos.

Testing was carried out within frequency range 9kHz to the tenth harmonics.

For details refer to Appendix 1.

5.1.8 Number of hopping frequency

RESULT:**Passed**

Date of testing : 2015-02-02
Test standard : FCC part 15.247(a)(1)(iii)
RSS-210 A8.1 (d)
Basic standard : ANSI C63.4: 2003
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shield room

Test setup

Test Channel : Low/ Middle/ High
Operation Mode : A
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

Table 12: Test result of Number of hopping frequency

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
<u>2400</u> to <u>2483.5</u> MHz	79	≥ 15	Pass

Table 14: Test result of Time of Occupancy, 8DPSK modulation

Channel	Data Mode	Pulse width (ms)	Measured Dwell time (s)	Limit (s)	Result
Low Channel	DH1	0.43	0.138	0.4	Pass
	DH3	1.71	0.274	0.4	Pass
	DH5	2.96	0.316	0.4	Pass
Mid Channel	DH1	0.44	0.141	0.4	Pass
	DH3	1.70	0.272	0.4	Pass
	DH5	2.98	0.318	0.4	Pass
High Channel	DH1	0.44	0.141	0.4	Pass
	DH3	1.70	0.272	0.4	Pass
	DH5	3.0	0.320	0.4	Pass

Note:

Dwell time = Pulse width x (Hopping rate / Number of channels) x Period

Period = 0.4 (seconds/ channel) x 79 (channel) = 31.6 seconds

5.1.10 Conducted emissions

RESULT:**Passed**

Date of testing : 2015-02-04
Test standard : FCC Part 15.207(a)
Basic standard : ANSI C63.4: 2003
Frequency range : 0.15 – 30MHz
Limits : FCC Part 15.207(a)
Kind of test site : Shield room

Test setup

Input Voltage : AC 120V, 60Hz via AC input of Notebook
Operation Mode : C
Earthing : Not connected
Ambient temperature : 25°C
Relative humidity : 55%
Atmospheric pressure : 101 kPa

For details refer to Appendix 1.

5.1.11 Radiated Emission

RESULT:**Passed**

Date of testing : 2015-01-27
Test standard : FCC Part 15 Per Section 15.209(a)
Clause 5.5 of ICES-003
RSS-Gen 7.1.4
Frequency range : 30 - 6000MHz
Classification : Class B
Test procedure : ANSI C63.4: 2003
CAN/CSA-CEI/IEC CISPR 22-02
RSS-Gen Table 5
Kind of test site : 3m Semi-Anechoic Chamber

Test setup

Input Voltage : AC 120V, 60Hz via AC input of Notebook
Operation mode : C
Earthing : Not connected
Ambient temperature : Refer to Appendix 1
Relative humidity : Refer to Appendix 1
Atmospheric pressure : Refer to Appendix 1


Test data refer to Appendix 1.

6. Photographs of the Test Set-Up


Photograph 1: Set-up for Spurious Emissions (9kHz-30MHz)




Photograph 2: Set-up for Spurious Emissions (30MHz-1GHz)

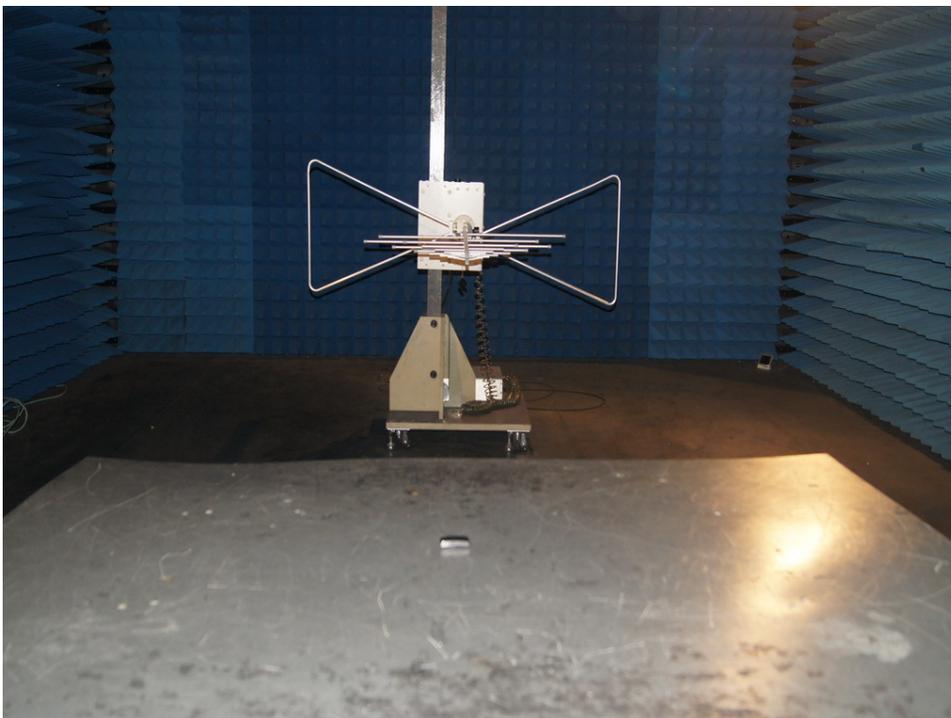

Photograph 3: Set-up for Spurious Emissions (1GHz-18GHz)

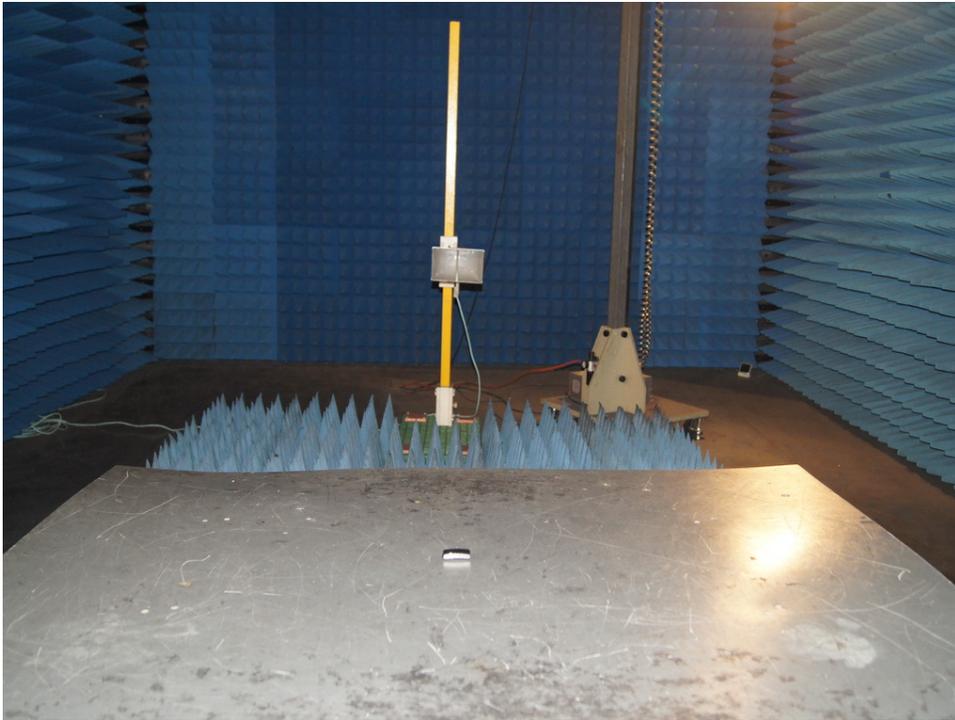


Photograph 4: Set-up for Spurious Emissions (18GHz-26GHz)

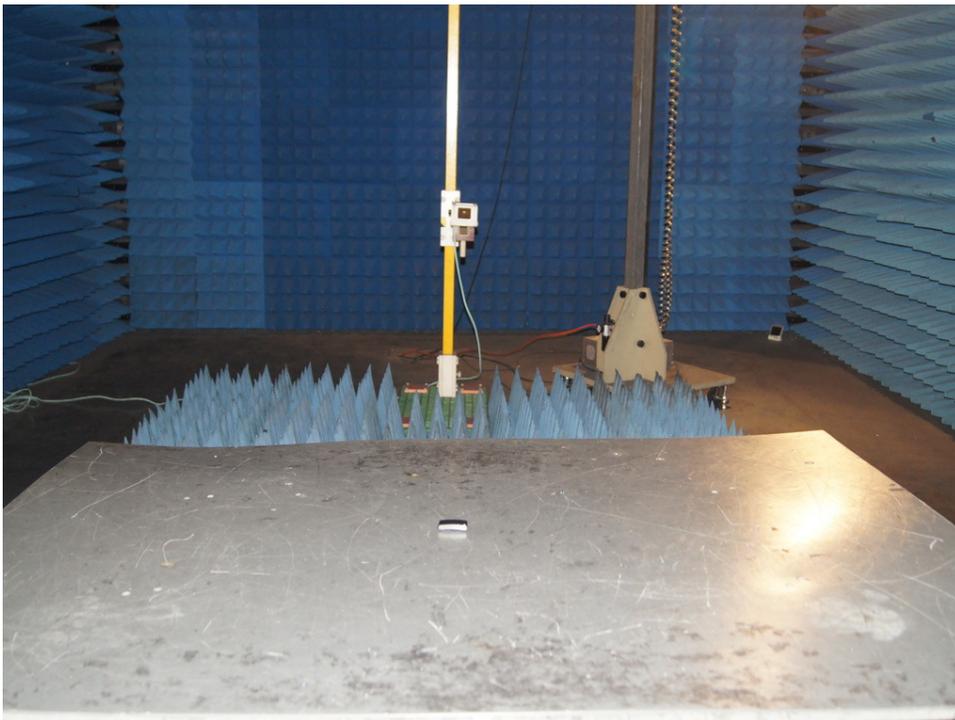


Photograph 5: Set-up for Conducted Emissions



Photograph 6: Set-up for Radiated Emissions, below 1GHz

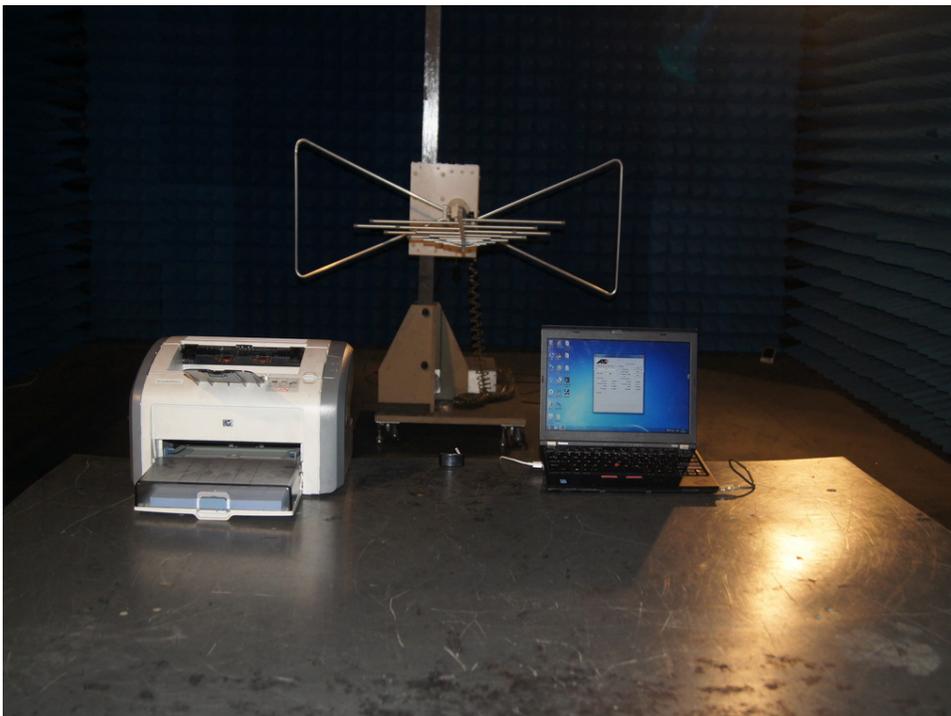

Photograph 7: Set-up for Radiated Emissions, above 1GHz

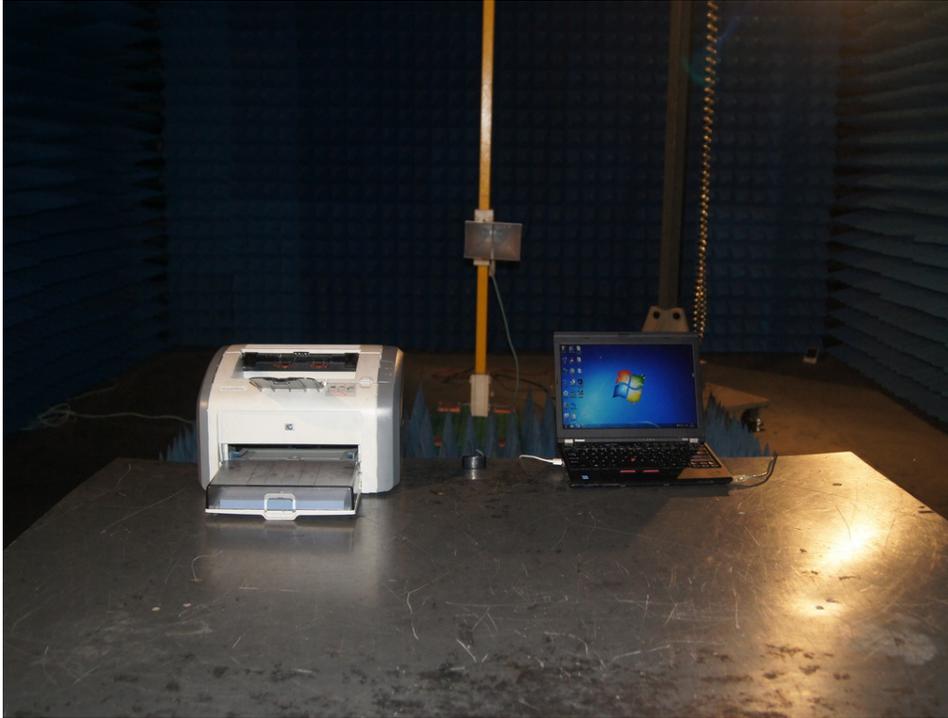

7. List of Tables

Table 1: List of Test and Measurement Equipment	5
Table 2: Rating of EUT	7
Table 3: Technical Specification of EUT	7
Table 4: Frequency hopping information	8
Table 5: Test result of Peak Output Power, GFSK modulation	14
Table 6: Test result of Peak Output Power, 8DPSK modulation	14
Table 7: Test result of 20dB Bandwidth, GFSK modulation	15
Table 8: Test result of 20dB Bandwidth, 8DPSK modulation	15
Table 9: Test result of 99% Bandwidth, GFSK modulation	16
Table 10: Test result of 99% Bandwidth, 8DPSK modulation	16
Table 11: Test result of Frequency Separation	19
Table 12: Test result of Number of hopping frequency	20
Table 13: Test result of Time of Occupancy, GFSK modulation	21
Table 14: Test result of Time of Occupancy, 8DPSK modulation	22

8. List of Photographs

Photograph 1: Set-up for Spurious Emissions (9kHz-30MHz)	25
Photograph 2: Set-up for Spurious Emissions (30MHz-1GHz)	25
Photograph 3: Set-up for Spurious Emissions (1GHz-18GHz)	26
Photograph 4: Set-up for Spurious Emissions (18GHz-26GHz)	26
Photograph 5: Set-up for Conducted Emissions	27
Photograph 6: Set-up for Radiated Emissions, below 1GHz	27
Photograph 7: Set-up for Radiated Emissions, above 1GHz	28

List of Figures

Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz)	2
Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz)	3
Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)	4
Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)	5
Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz – 18GHz)	6
Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)	7
Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz – 25GHz)	8
Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)	9
Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)	10
Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity (9kHz – 30MHz)	11
Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)	12
Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)	13
Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)	14
Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)	15
Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)	16
Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)	17
Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)	18
Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity (9kHz – 30MHz)	19
Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)	20
Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)	21
Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz – 18GHz)	22
Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)	23
Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz – 25GHz)	24
Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)	25
Figure 65: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal	26
Figure 66: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical	27
Figure 67: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal	28
Figure 68: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical	29
Figure 73: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.1, GFSK Modulation	30
Figure 73: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.2, GFSK Modulation	31
Figure 73: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.3, GFSK Modulation	32
Figure 73: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.1, 8DPSK Modulation	33
Figure 73: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.2, 8DPSK Modulation	34
Figure 73: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.3, 8DPSK Modulation	35
Figure 73: Test figure of Conducted emissions, Mode C, line live	36
Figure 74: Test figure of Conducted emissions, Mode C, line neutral	37
Figure 75: Test figure of Radiated emissions, Mode C, Below 1GHz, Horizontal	38
Figure 76: Test figure of Radiated emissions, Mode C, Below 1GHz, Vertical	39
Figure 77: Test figure of Radiated emissions, Mode C, Above 1GHz, Horizontal	40
Figure 78: Test figure of Radiated emissions, Mode C, Above 1GHz, Vertical	41

Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: TalkBand M/N:B2
Manufacturer: GoerTek Inc.
Operating Condition: TX 2402MHz
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: DC 3.7V
Comment: X
Start of Test: 2015-02-02 /

SCAN TABLE: "LFRE Fin"

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

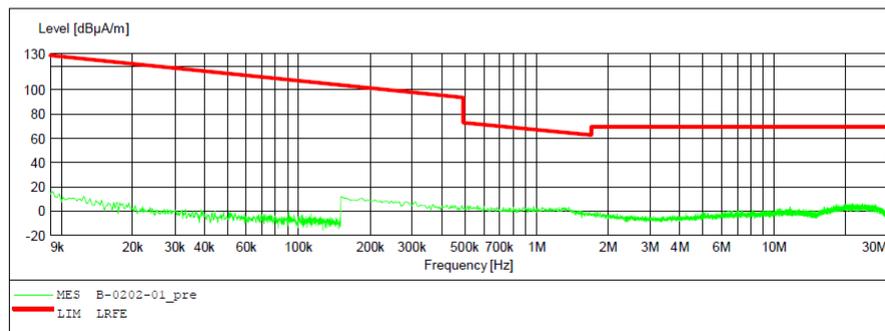


Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: TalkBand M/N:B2
Manufacturer: GoerTek Inc.
Operating Condition: TX 2402MHz
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: DC 3.7V
Comment: Y
Start of Test: 2015-02-02 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

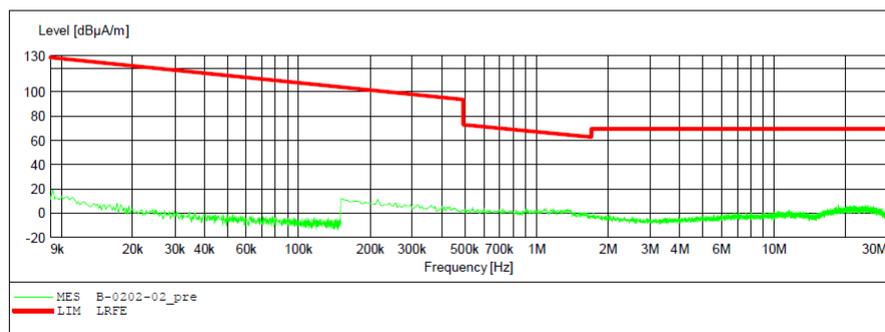


Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: LAN2015-2 #138	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2015/01/31
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

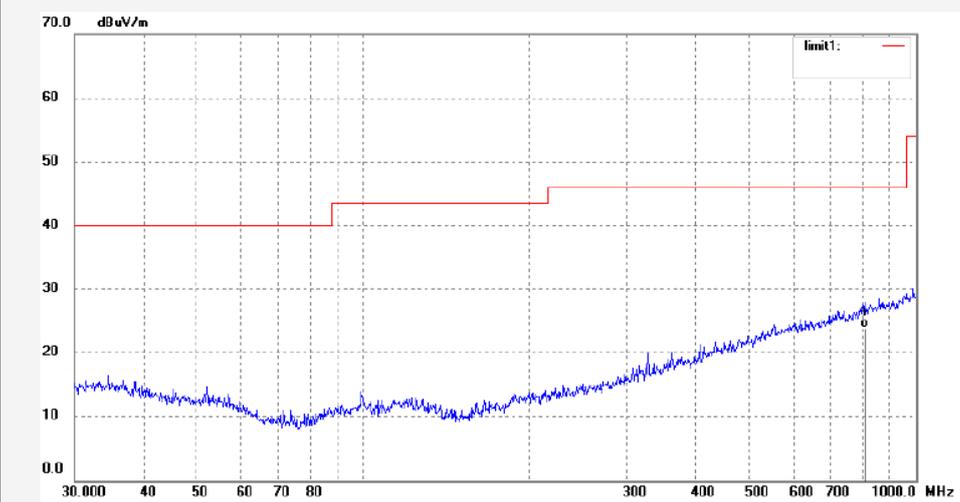

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	807.4290	23.71	0.15	23.86	46.00	-22.14	QP			

Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2015-2 #137	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2015/01/31
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

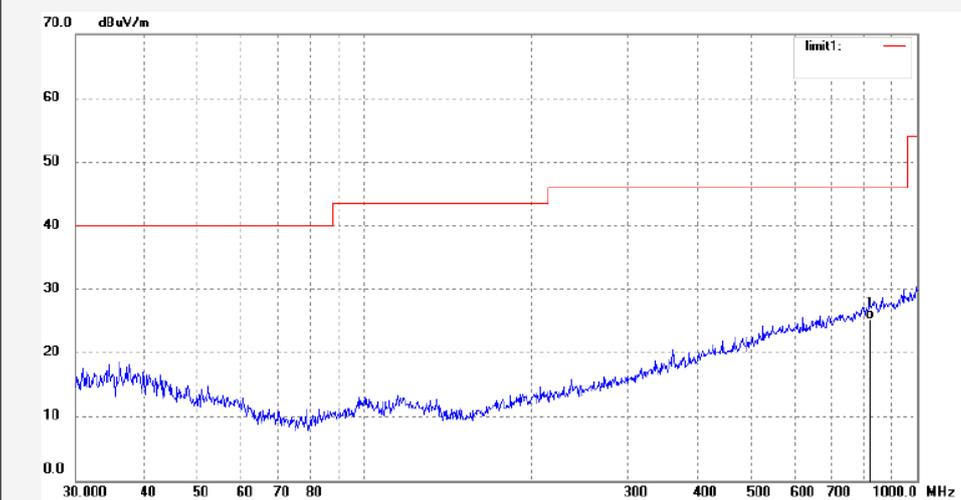

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	821.7103	24.93	0.36	25.29	46.00	-20.71	QP			

Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz –18GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015-2 #113	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

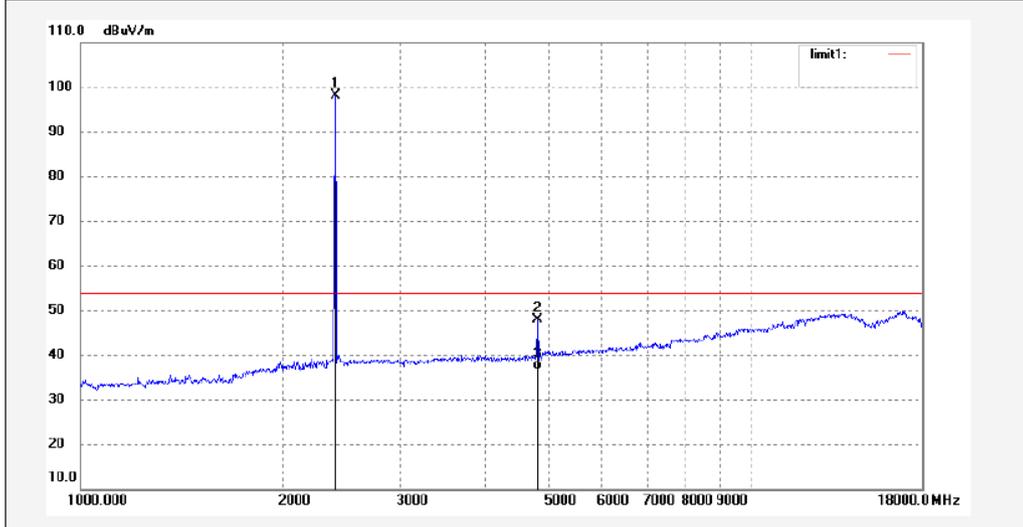

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.70	-7.45	98.25	/	/	peak			
2	4804.023	48.28	-0.30	47.98	74.00	-26.02	peak			
3	4804.023	37.04	-0.30	36.74	54.00	-17.26	AVG			

Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ian2015-2 #112	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

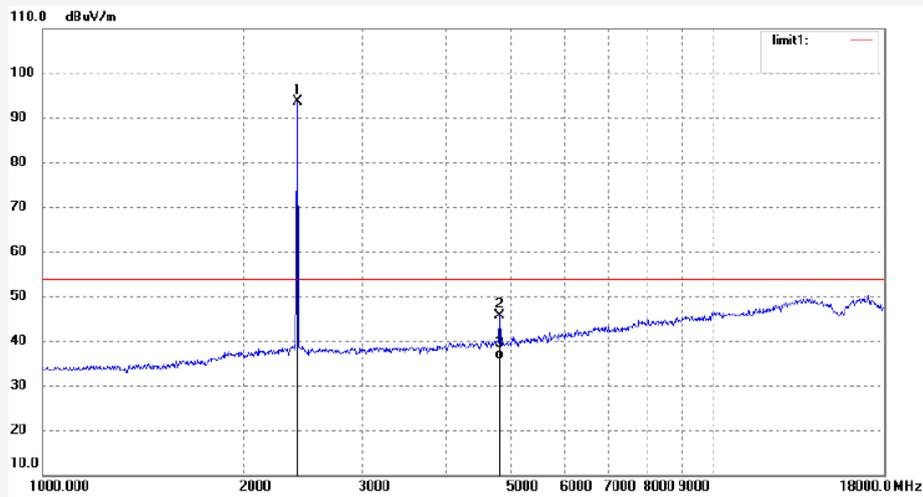

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	101.14	-7.45	93.69	/	/	peak			
2	4804.010	45.89	-0.30	45.59	74.00	-28.41	peak			
3	4804.010	36.21	-0.30	35.91	54.00	-18.09	AVG			

Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz –25GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015 #154	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/23/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

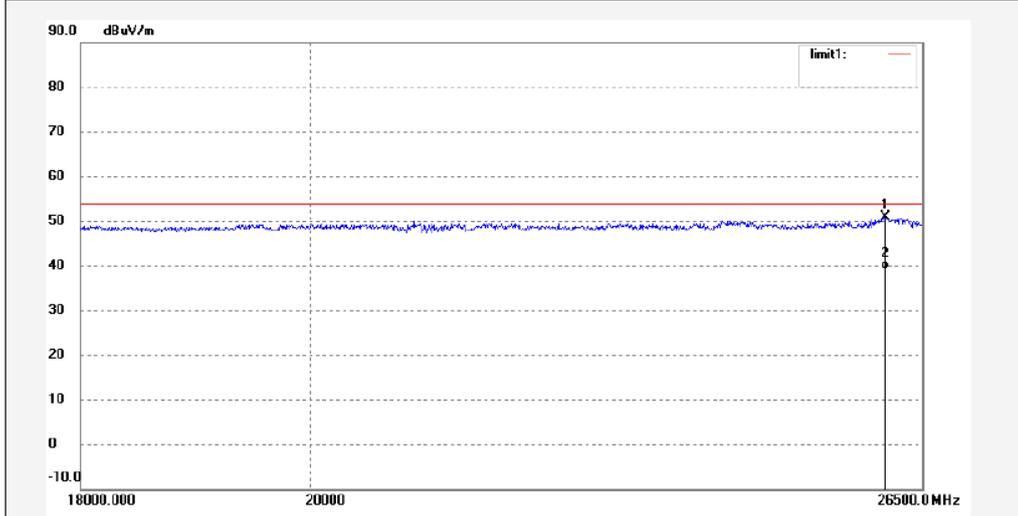

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26062.917	34.49	16.50	50.99	74.00	-23.01	peak			
2	26062.917	22.75	16.50	39.25	54.00	-14.75	AVG			

Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015 #155	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/23/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

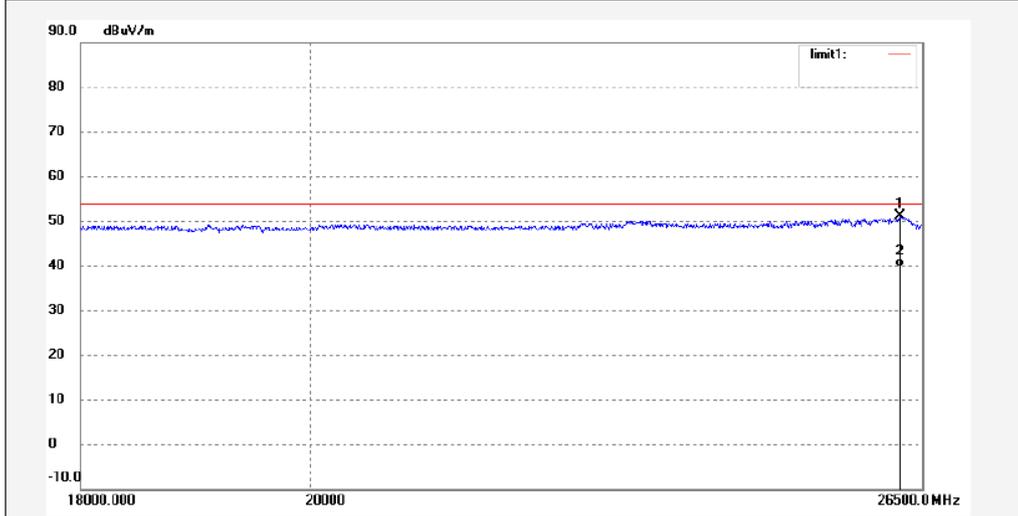

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26235.349	34.59	16.50	51.09	74.00	-22.91	peak			
2	26235.349	23.04	16.50	39.54	54.00	-14.46	AVG			

Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: TalkBand M/N:B2
Manufacturer: GoerTek Inc.
Operating Condition: TX 2441MHz
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: DC 3.7V
Comment: X
Start of Test: 2015-02-02 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

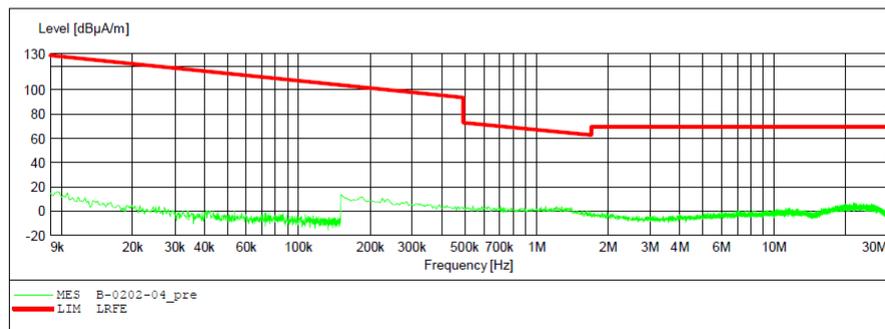


Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: TalkBand M/N:B2
Manufacturer: GoerTek Inc.
Operating Condition: TX 2441MHz
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: DC 3.7V
Comment: Y
Start of Test: 2015-02-02 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

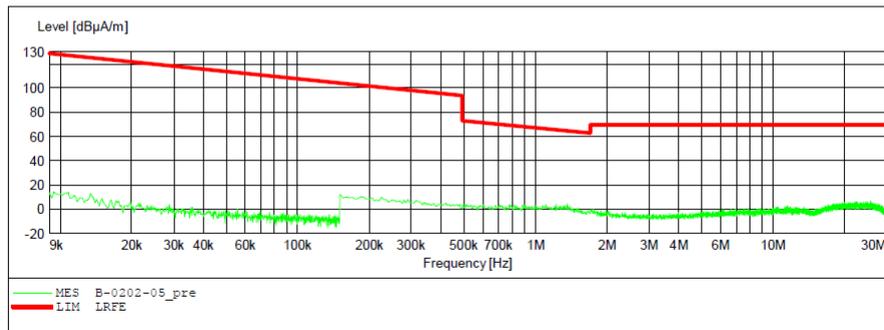


Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2015-2 #139	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2015/01/31
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

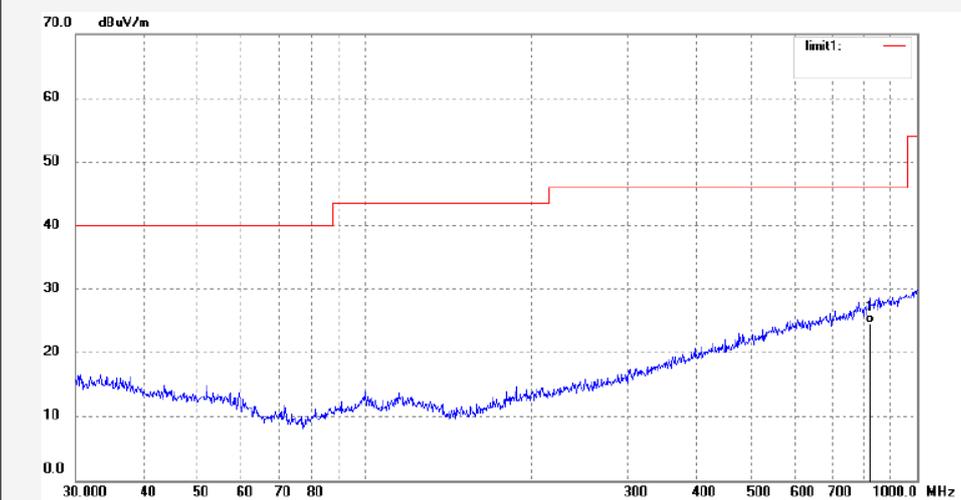

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	821.7103	24.24	0.36	24.60	46.00	-21.40	QP			

Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2015-2 #140	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2015/01/31
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

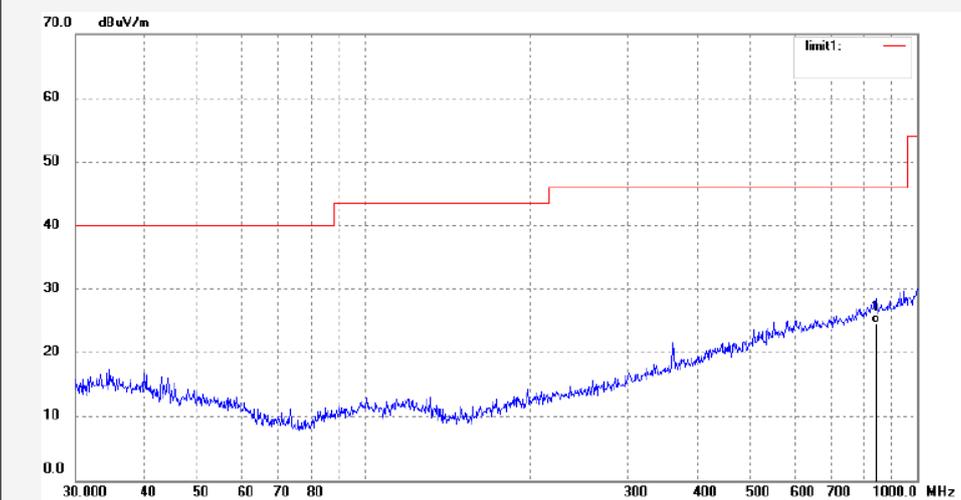

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	842.1295	23.85	0.66	24.51	46.00	-21.49	QP			

Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ian2015-2 #117	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

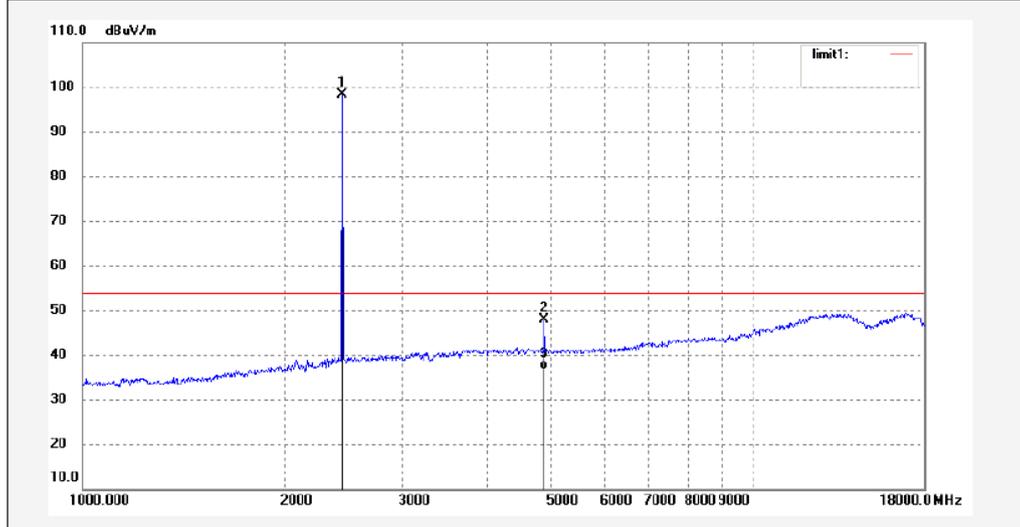

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	105.69	-7.35	98.34	/	/	peak			
2	4882.030	47.67	0.14	47.81	74.00	-26.19	peak			
3	4882.030	36.59	0.14	36.73	54.00	-17.27	AVG			

Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015-2 #116	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

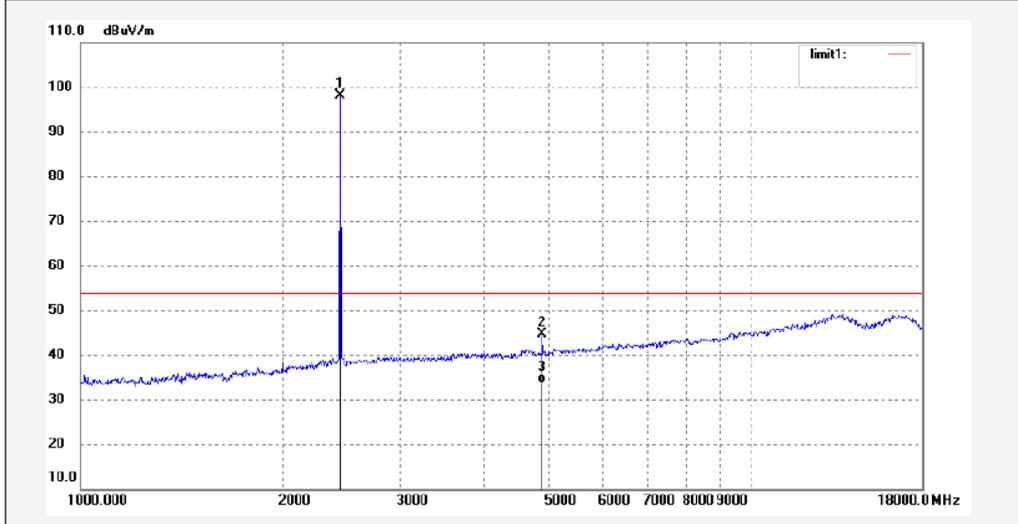

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	105.45	-7.35	98.10	/	/	peak			
2	4882.035	44.41	0.14	44.55	74.00	-29.45	peak			
3	4882.035	33.52	0.14	33.66	54.00	-20.34	AVG			

Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015 #157	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/23/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

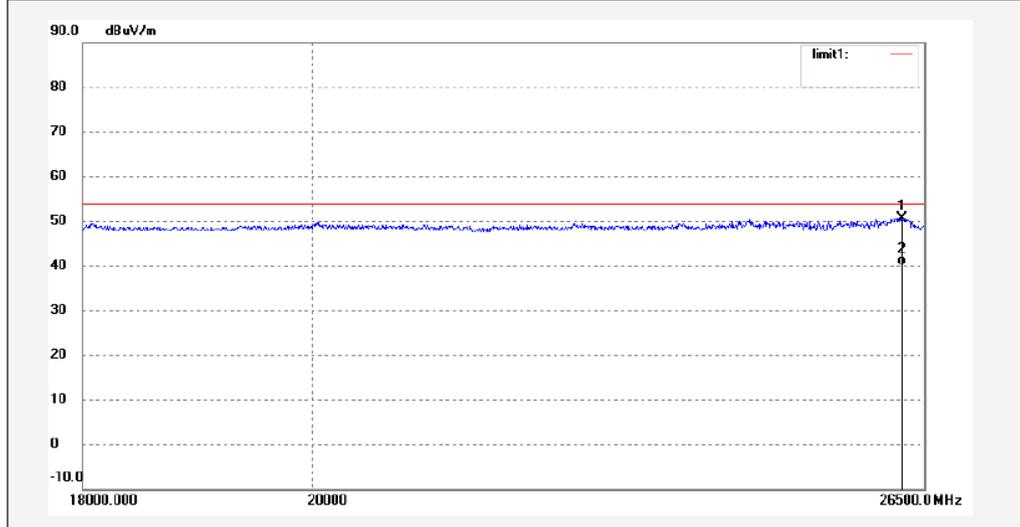

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26234.889	34.22	16.50	50.72	74.00	-23.28	peak			
2	26234.889	23.51	16.50	40.01	54.00	-13.99	AVG			

Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015 #156	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/23/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

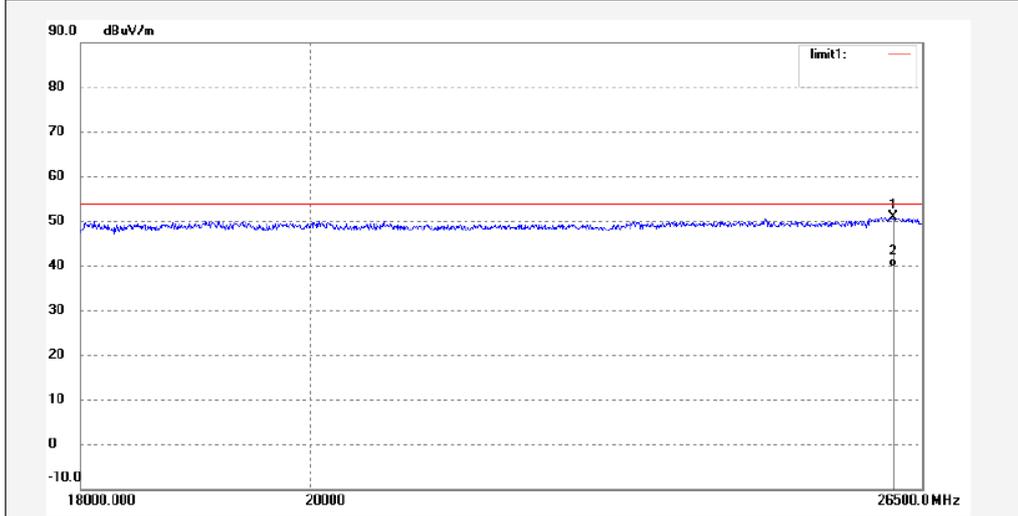

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26153.799	34.34	16.50	50.84	74.00	-23.16	peak			
2	26153.799	23.11	16.50	39.61	54.00	-14.39	AVG			

Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: TalkBand M/N:B2
Manufacturer: GoerTek Inc.
Operating Condition: TX 2480MHz
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: DC 3.7V
Comment: X
Start of Test: 2015-02-02 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

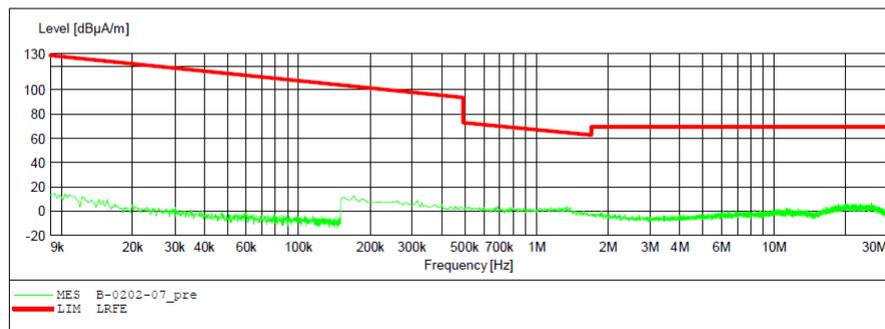


Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity (9kHz – 30MHz)

ACCURATE TECHNOLOGY CO.,LTD

FCC Class B 3M Radiated

EUT: TalkBand M/N:B2
Manufacturer: GoerTek Inc.
Operating Condition: TX 2480MHz
Test Site: 1#Shielding Room
Operator: LAN
Test Specification: DC 3.7V
Comment: Y
Start of Test: 2015-02-02 /

SCAN TABLE: "LFRE Fin"

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

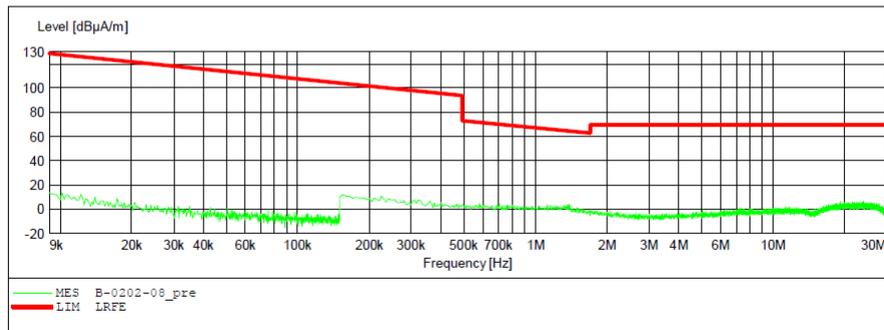


Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2015-2 #142	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2015/01/31
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

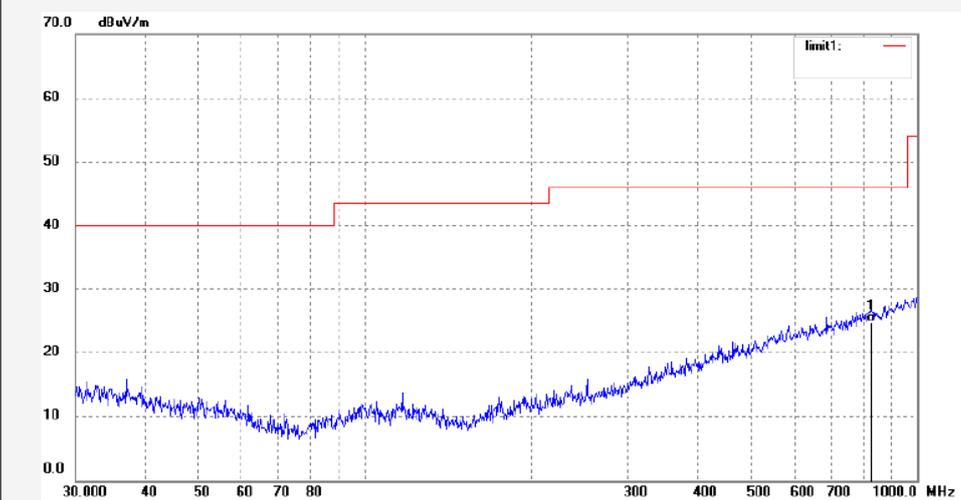

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	827.4933	24.22	0.48	24.70	46.00	-21.30	QP			

Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: LAN2015-2 #141	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 2015/01/31
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

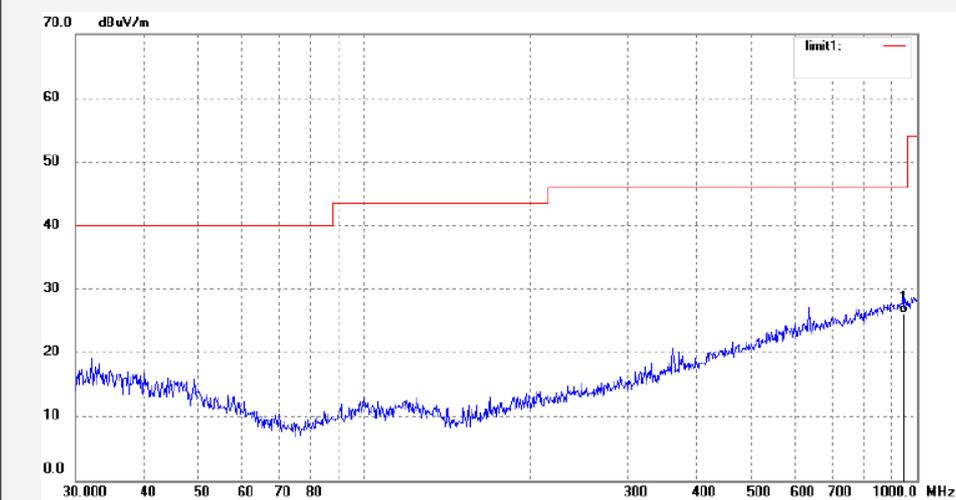

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	945.4397	24.11	2.09	26.20	46.00	-19.80	QP			

Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz –18GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015-2 #118	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

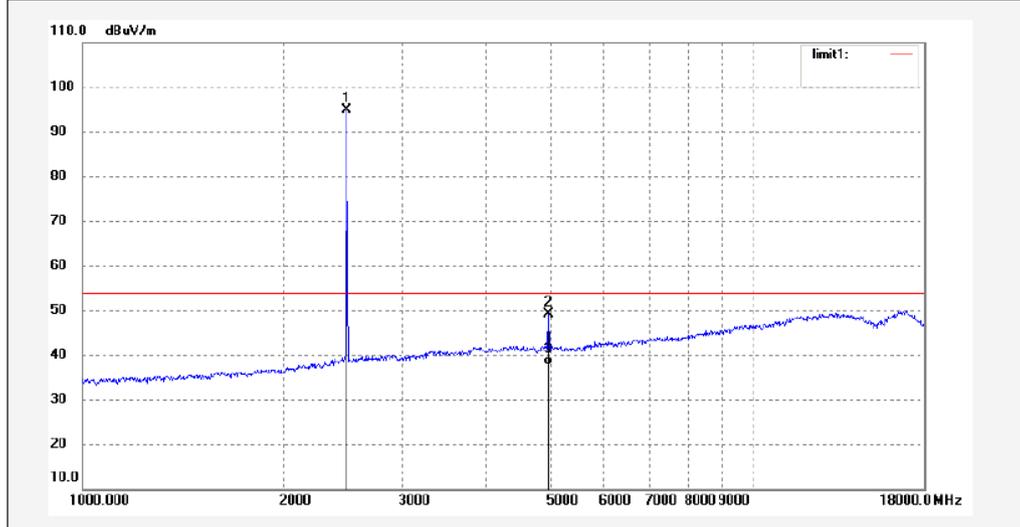

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	102.27	-7.37	94.90	/	/	peak			
2	4960.017	48.50	0.52	49.02	74.00	-24.98	peak			
3	4960.017	37.08	0.52	37.60	54.00	-16.40	AVG			

Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015-2 #119	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

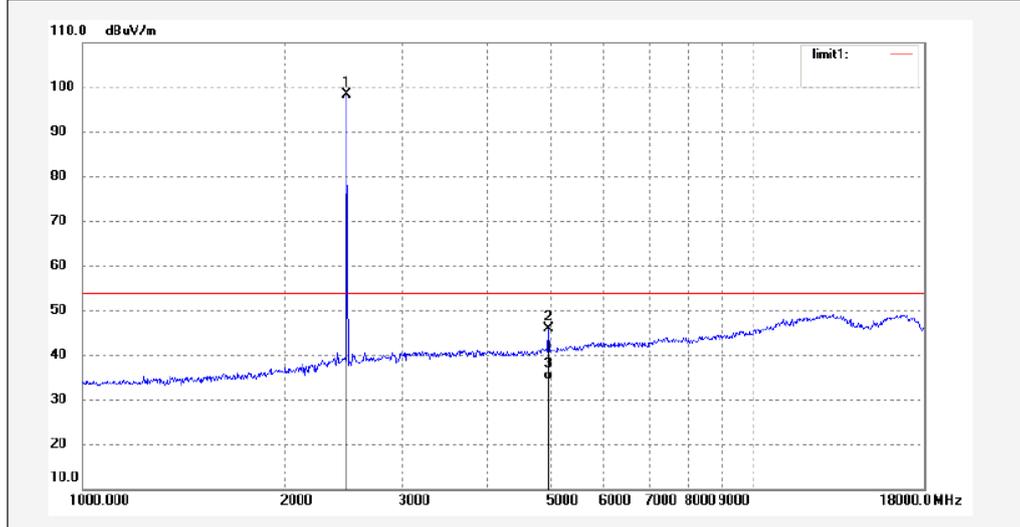

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.75	-7.37	98.38	/	/	peak			
2	4960.024	45.46	0.52	45.98	74.00	-28.02	peak			
3	4960.024	33.95	0.52	34.47	54.00	-19.53	AVG			

Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz –25GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015 #158	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/23/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

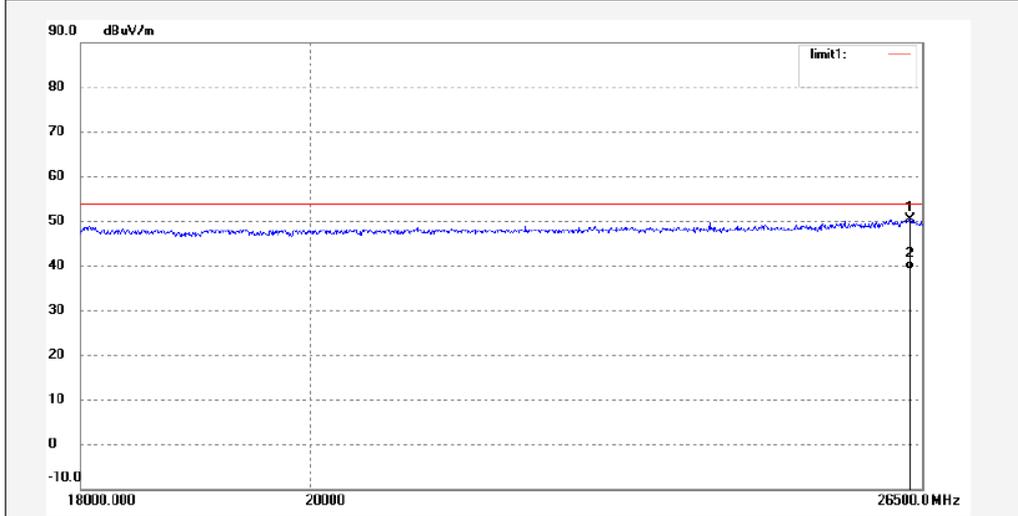

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26356.971	33.94	16.50	50.44	74.00	-23.56	peak			
2	26356.971	22.70	16.50	39.20	54.00	-14.80	AVG			

Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015 #159	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/23/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

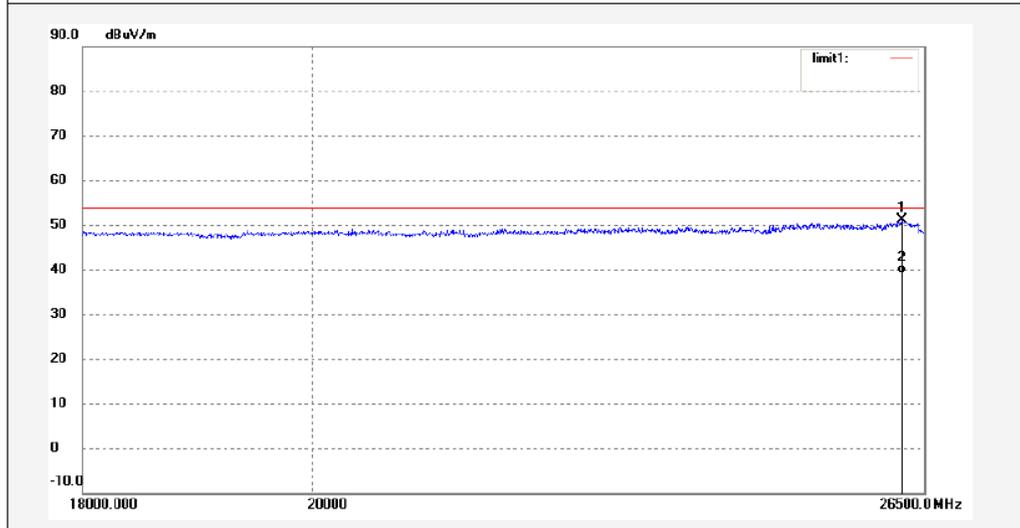

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26234.650	34.52	16.50	51.02	74.00	-22.98	peak			
2	26234.650	22.64	16.50	39.14	54.00	-14.86	AVG			

Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ian2015-2 #114	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

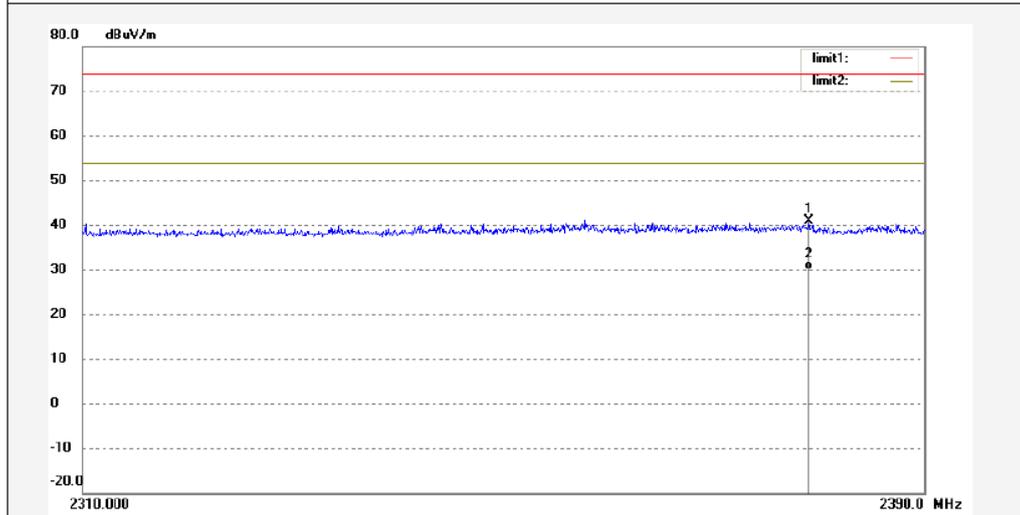

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2378.880	48.40	-7.59	40.81	74.00	-33.19	peak			
2	2378.880	37.52	-7.59	29.93	54.00	-24.07	AVG			

Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015-2 #115	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

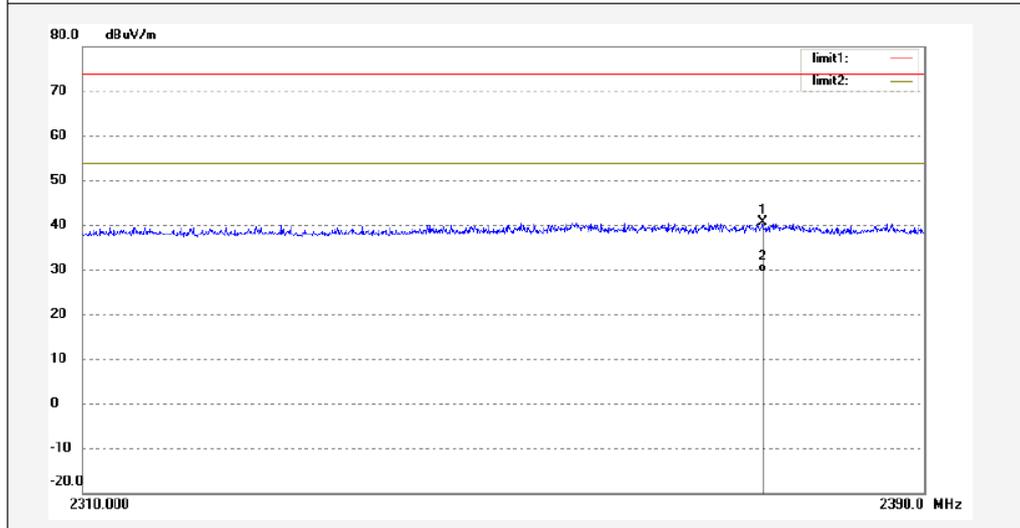

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2374.480	48.33	-7.63	40.70	74.00	-33.30	peak			
2	2374.480	36.95	-7.63	29.32	54.00	-24.68	AVG			

Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ian2015-2 #122	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

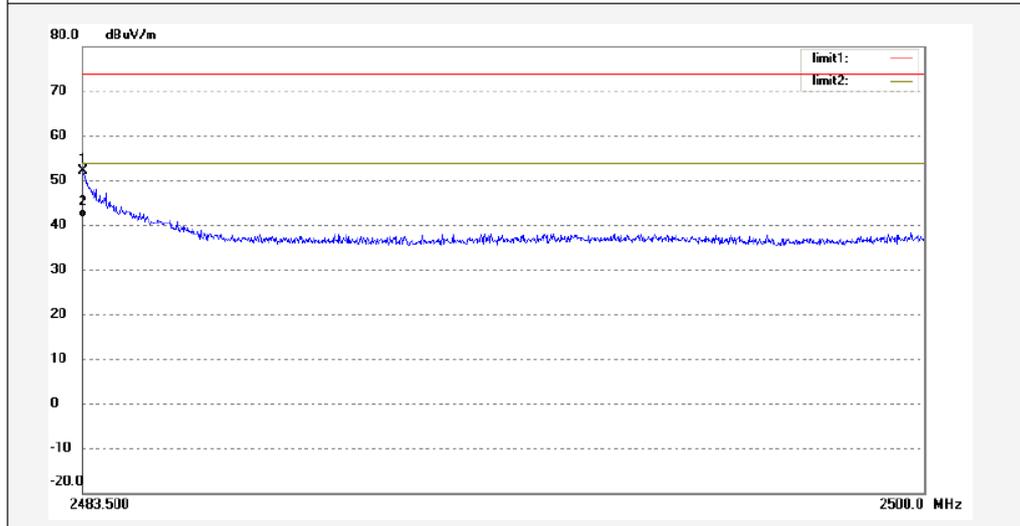

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	59.56	-7.37	52.19	74.00	-21.81	peak			
2	2483.500	48.91	-7.37	41.54	54.00	-12.46	AVG			

Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396


Job No.: Ian2015-2 #121	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: DC 3.7V
Test item: Radiation Test	Date: 15/01/31/
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

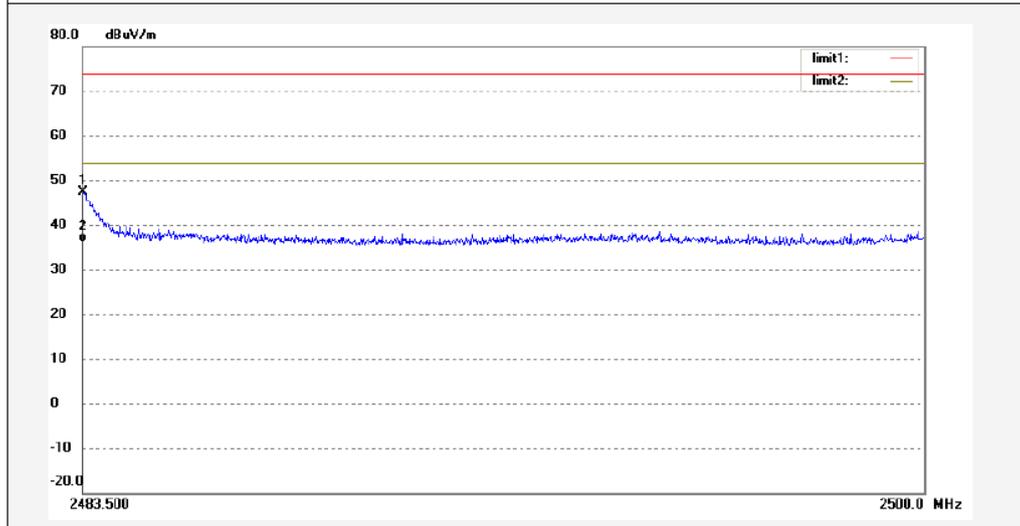


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	54.85	-7.37	47.48	74.00	-26.52	peak			
2	2483.500	43.52	-7.37	36.15	54.00	-17.85	AVG			

Figure 29: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.1, GFSK Modulation

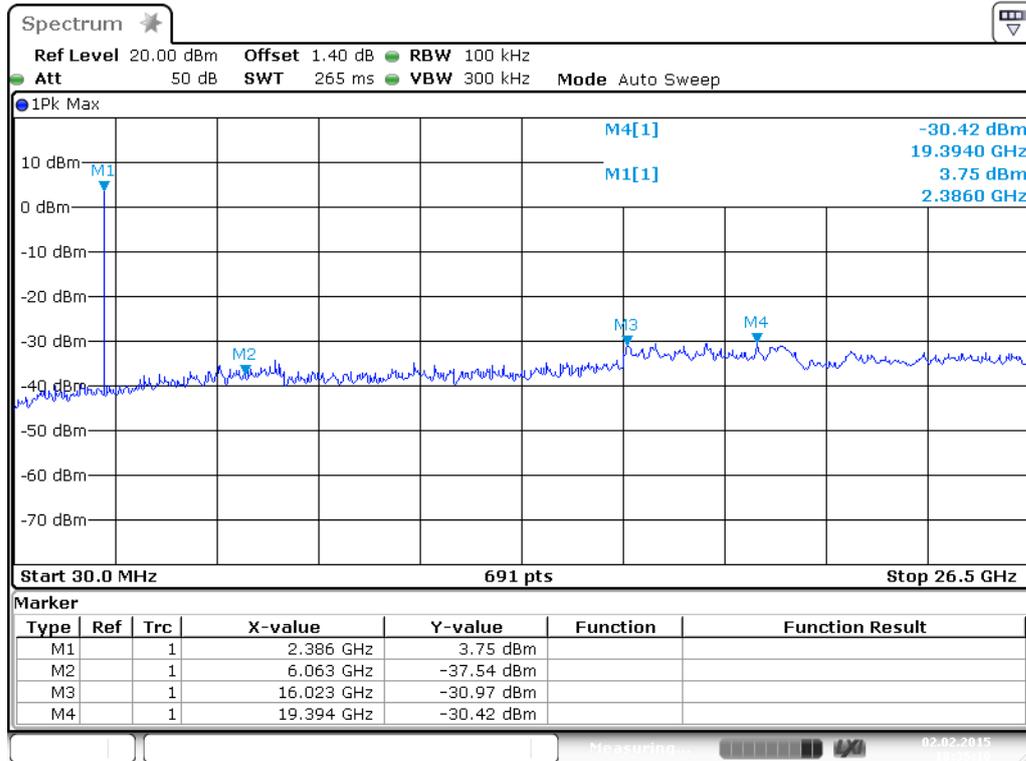


Date: 2.FEB.2015 18:35:10

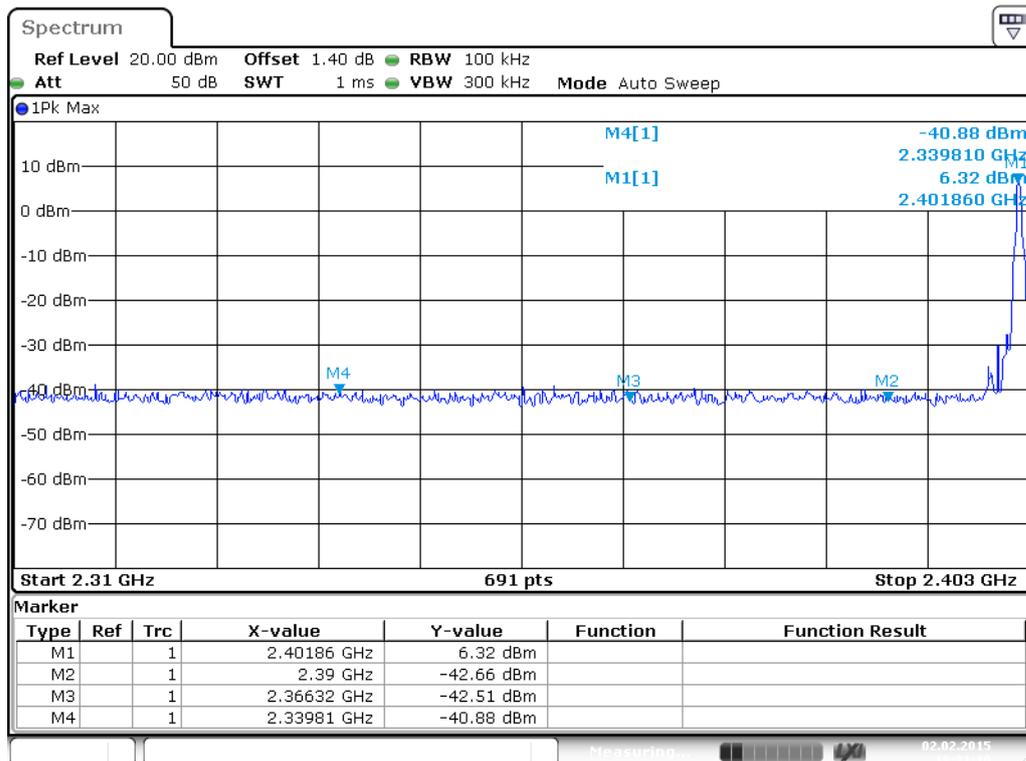


Date: 2.FEB.2015 18:31:10

Figure 30: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.2, GFSK Modulation

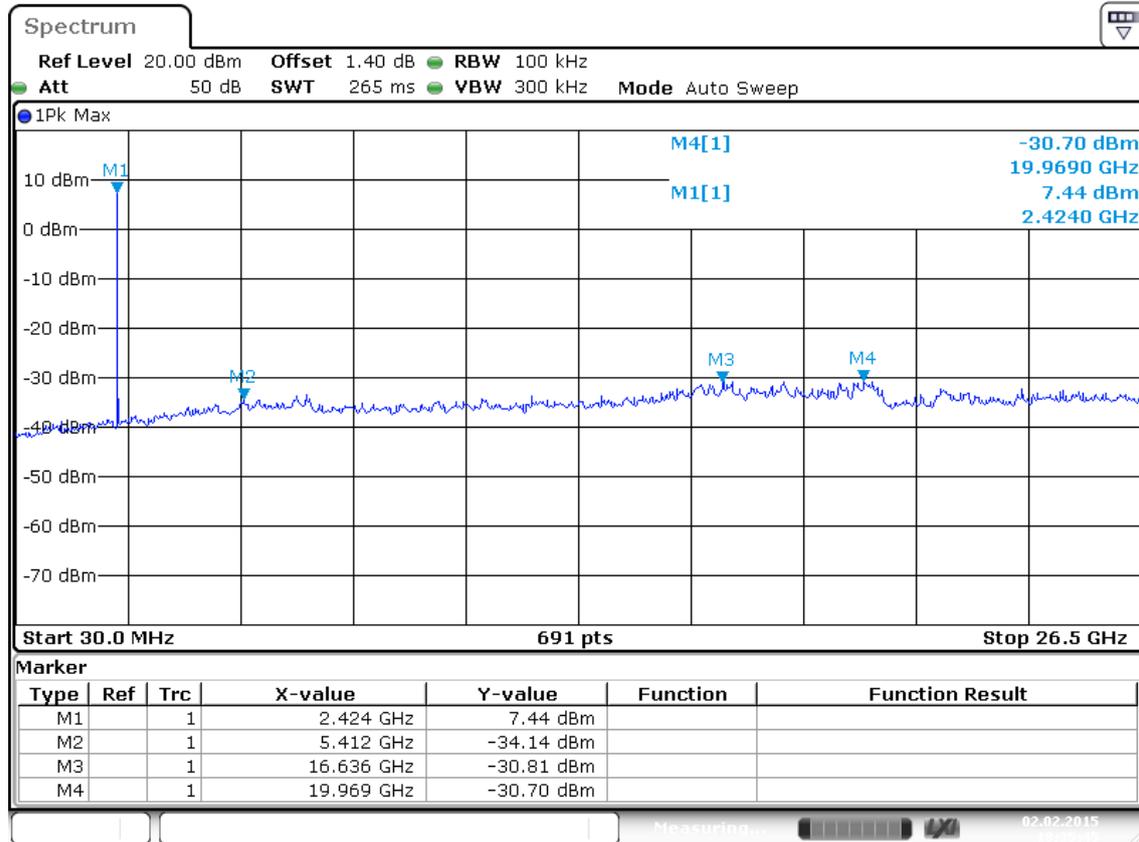


Date: 2.FEB.2015 18:35:45

Figure 31: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.3, GFSK Modulation

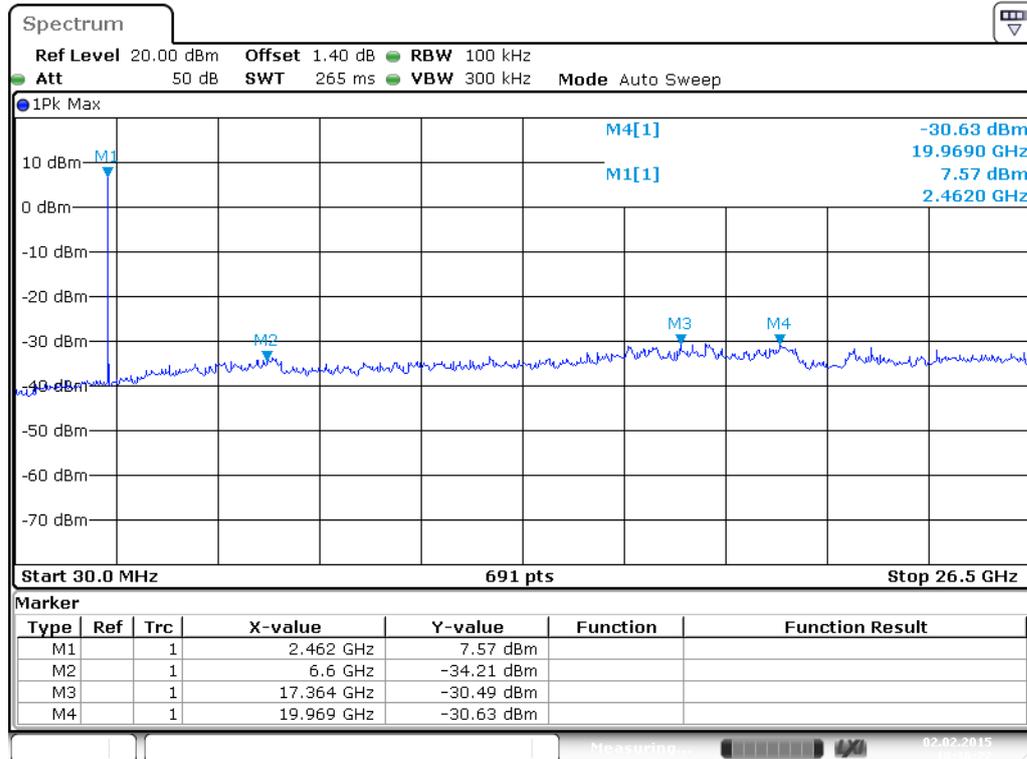


Date: 2.FEB.2015 18:36:22

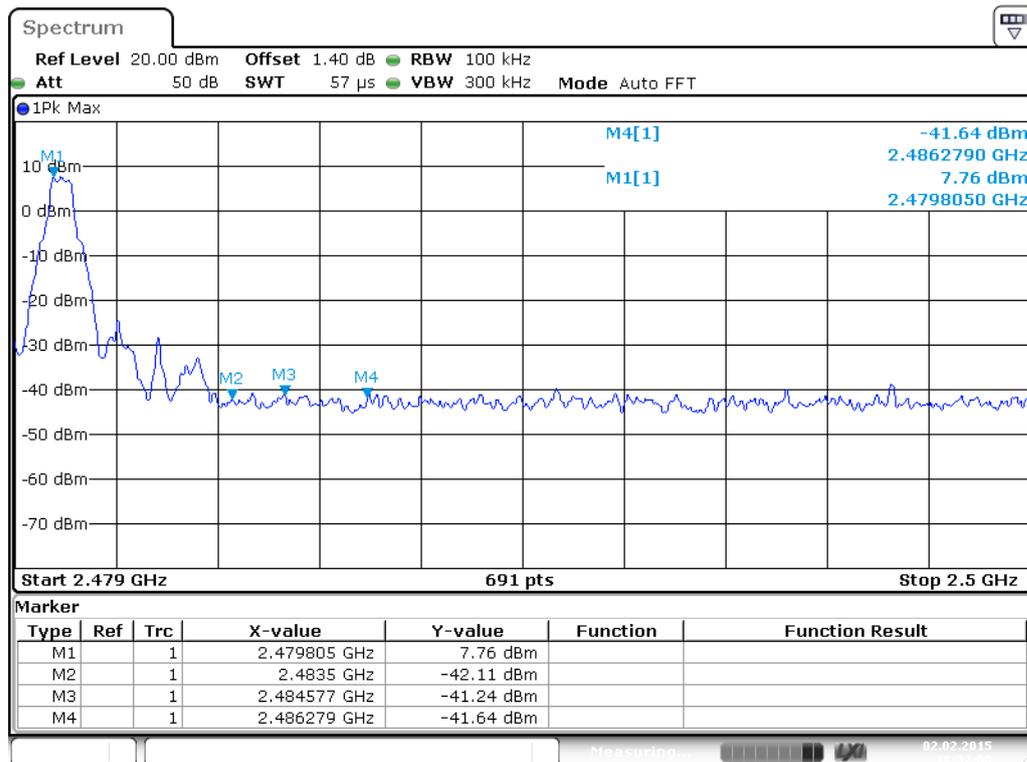


Date: 2.FEB.2015 18:32:08

Figure 32: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.1, 8DPSK Modulation

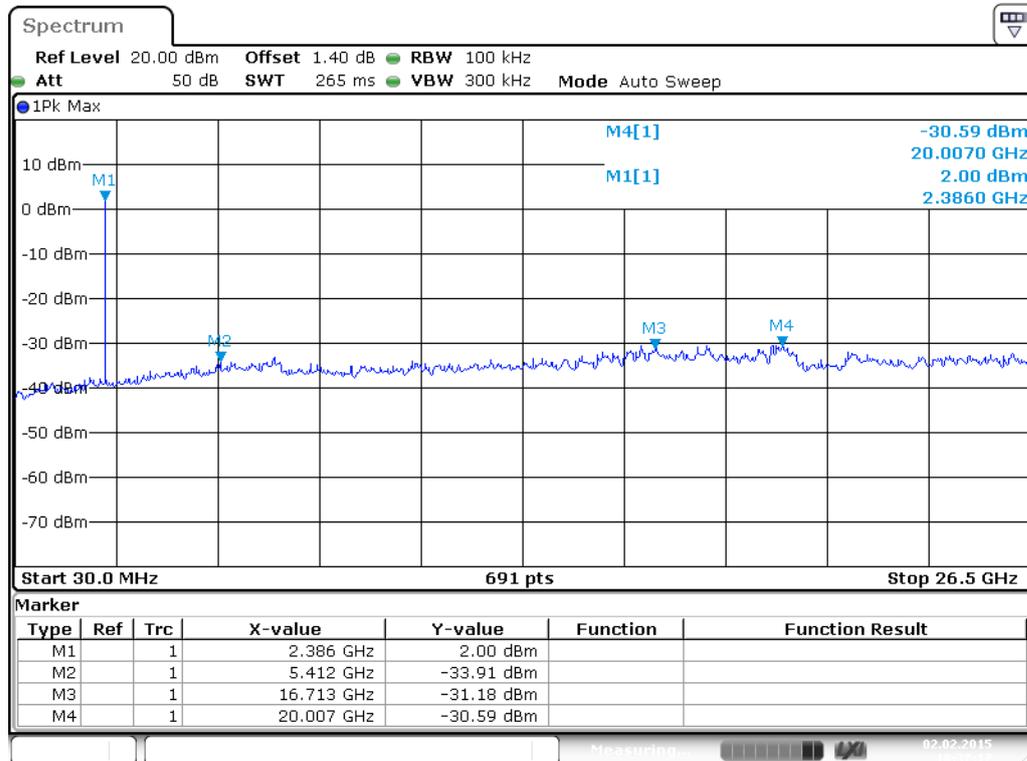


Date: 2.FEB.2015 18:37:17

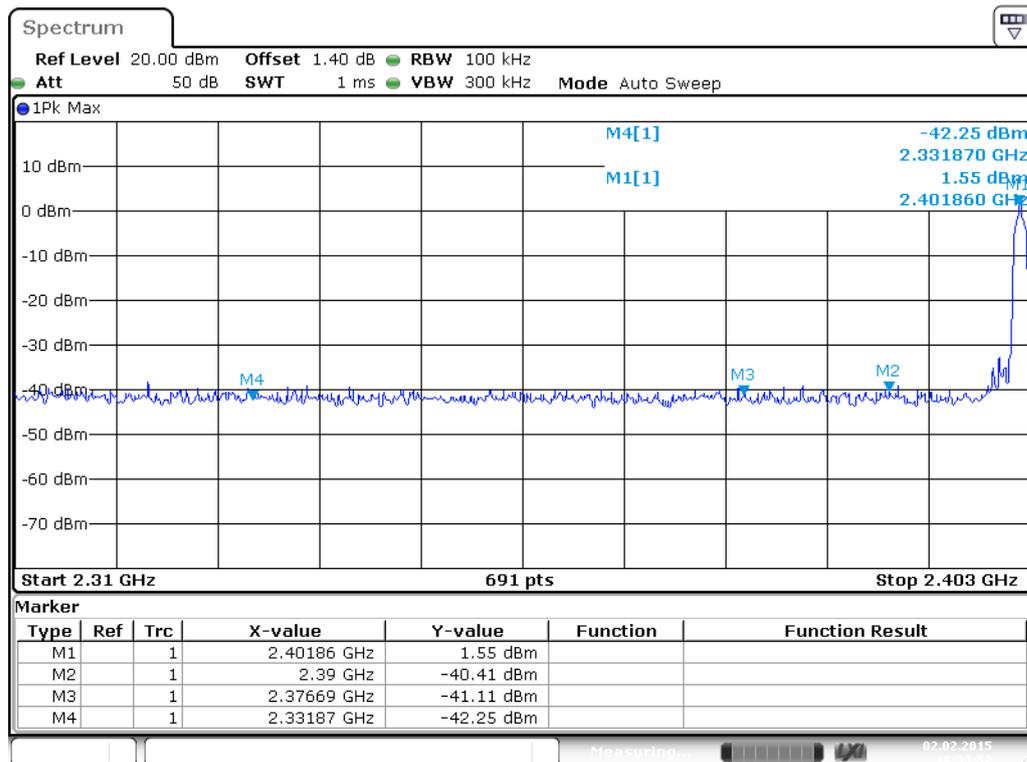


Date: 2.FEB.2015 18:33:52

Figure 33: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.2, 8DPSK Modulation

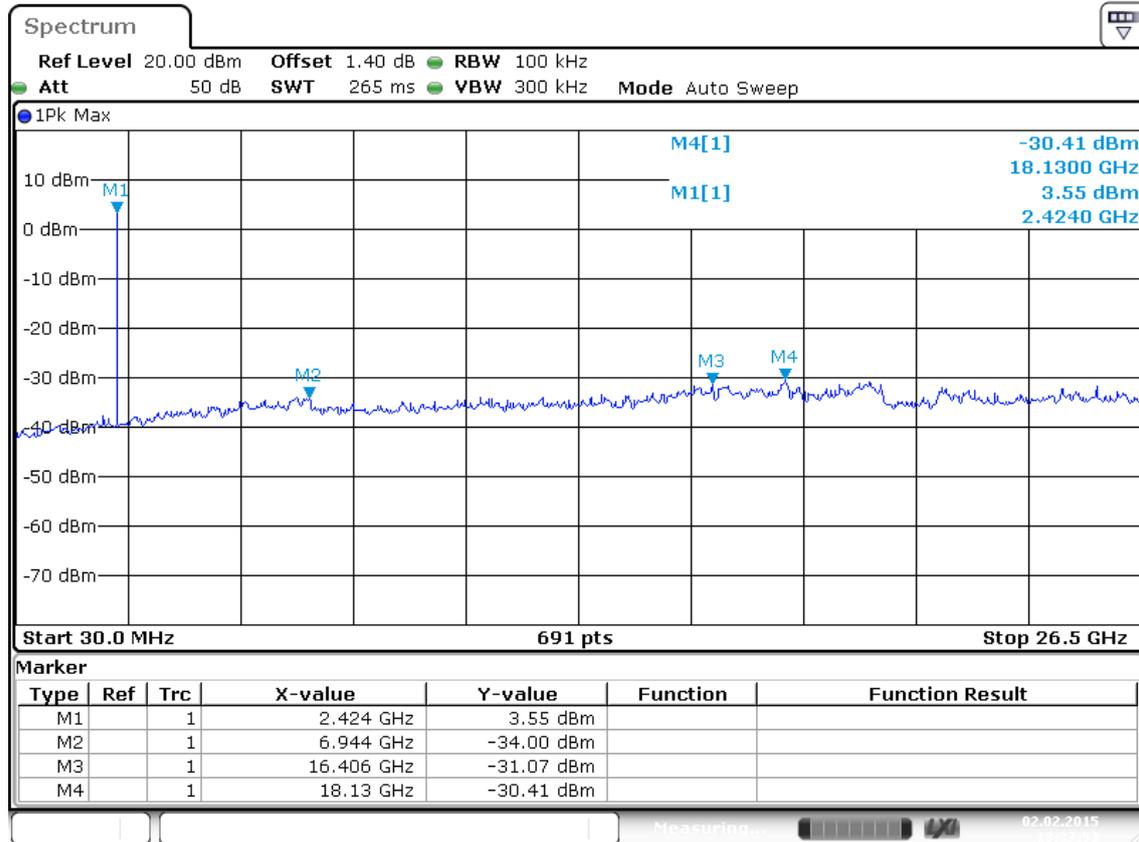


Date: 2.FEB.2015 18:37:53

Figure 34: Test figure of conducted spurious emissions measured in 100kHz Bandwidth, Mode A.3, 8DPSK Modulation

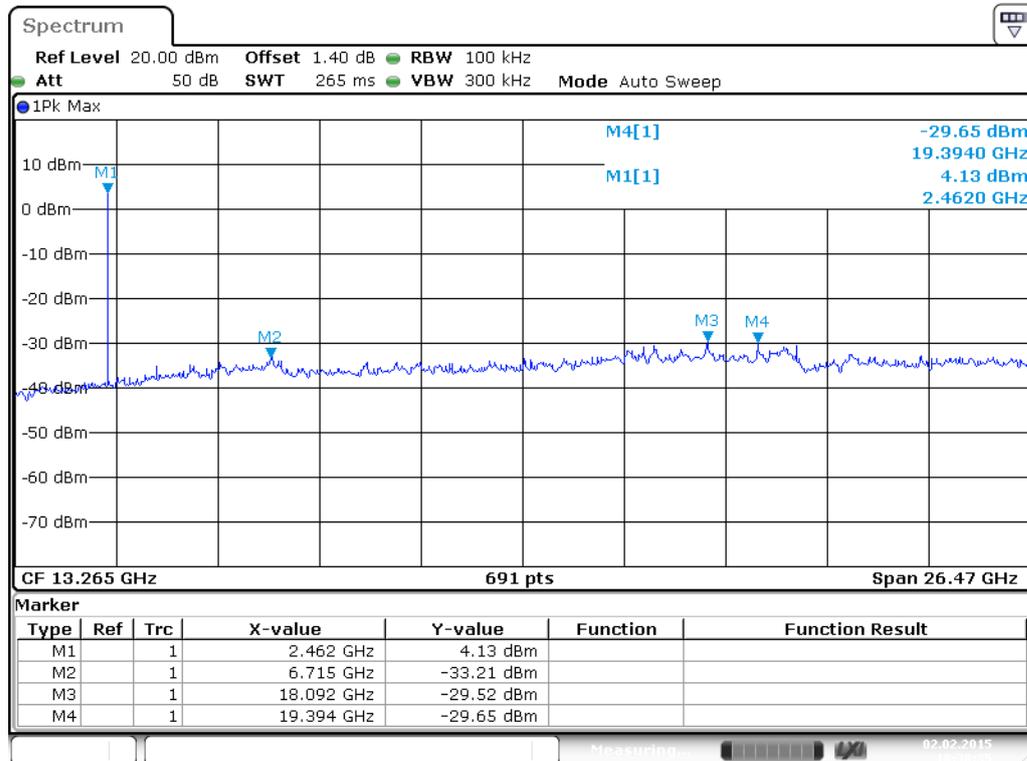

Date: 2.FEB.2015 18:38:35

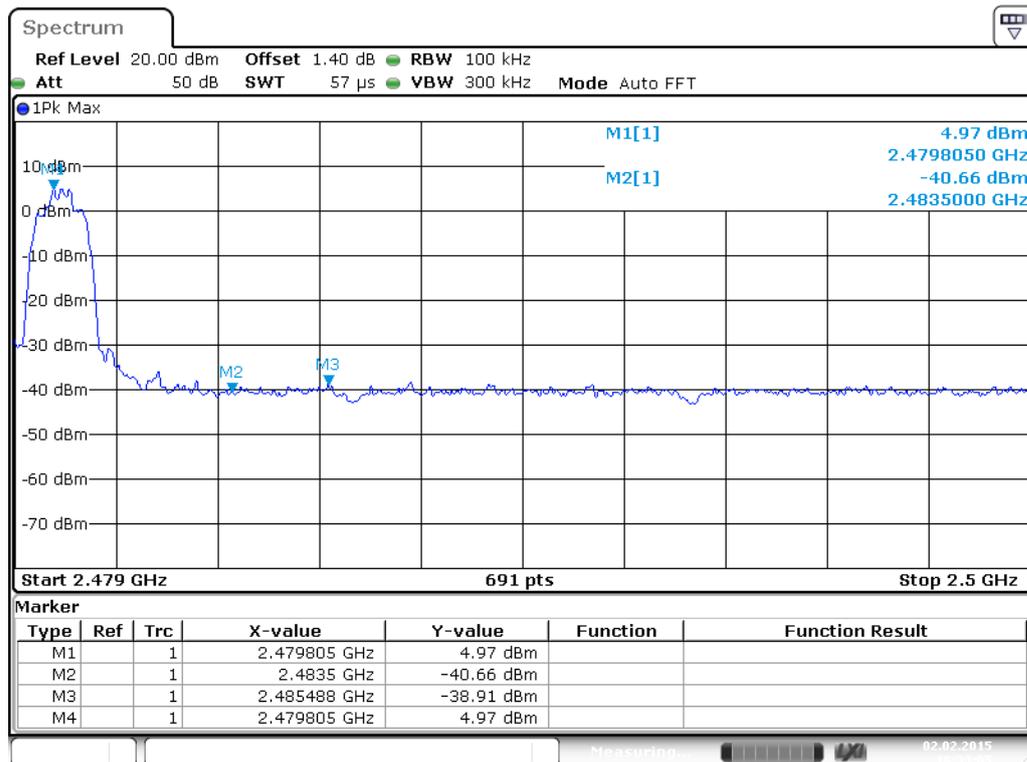

Date: 2.FEB.2015 18:33:05

Figure 35: Test figure of Conducted emissions, Mode C, line live

ACCURATE TECHNOLOGY CO.,LTD


CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: TalkBand M/N:B2
 Manufacturer: GoerTek Inc.
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: L 120V/60Hz
 Comment: Mains Port
 Start of Test: 2/4/2015 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70

Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008
Average						

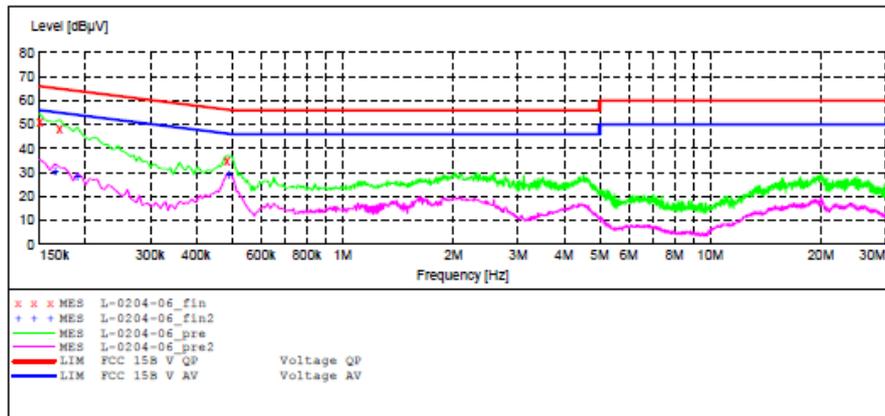

MEASUREMENT RESULT: "L-0204-06_fin"

2/4/2015

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	51.30	10.5	66	14.7	QP	L1	GND
0.170000	48.10	10.5	65	16.9	QP	L1	GND
0.485000	34.60	10.7	56	21.7	QP	L1	GND

MEASUREMENT RESULT: "L-0204-06_fin2"

2/4/2015

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.165000	30.80	10.5	55	24.4	AV	L1	GND
0.190000	28.50	10.5	54	25.5	AV	L1	GND
0.490000	29.40	10.7	46	16.8	AV	L1	GND

Figure 36: Test figure of Conducted emissions, Mode C, line neutral


ACCURATE TECHNOLOGY CO.,LTD

CONDUCTED EMISSION STANDARD FCC PART 15 B

EUT: TalkBand M/N:B2
 Manufacturer: GoerTek Inc.
 Operating Condition: Charging
 Test Site: 1#Shielding Room
 Operator: LAN
 Test Specification: N 120V/60Hz
 Comment: Mains Port
 Start of Test: 2/4/2015 /

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008
 Average

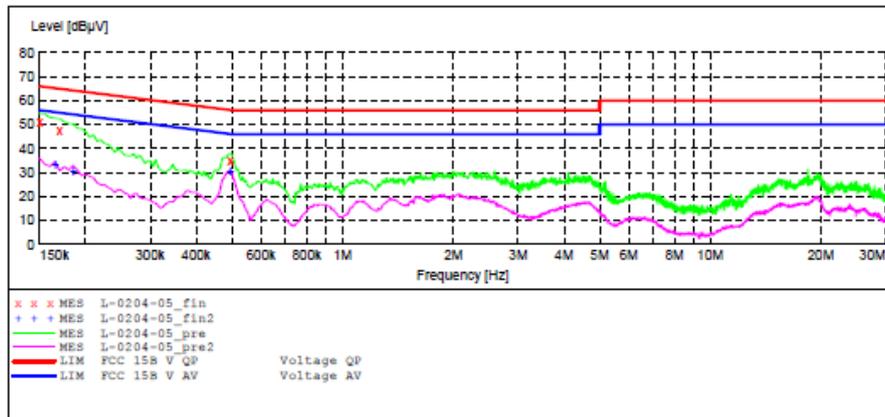

MEASUREMENT RESULT: "L-0204-05_fin"

2/4/2015

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	51.30	10.5	66	14.7	QP	N	GND
0.170000	47.60	10.5	65	17.4	QP	N	GND
0.495000	34.60	10.7	56	21.5	QP	N	GND

MEASUREMENT RESULT: "L-0204-05_fin2"

2/4/2015

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.165000	33.20	10.5	55	22.0	AV	N	GND
0.185000	30.50	10.5	54	23.8	AV	N	GND
0.495000	30.70	10.7	46	15.4	AV	N	GND

Figure 37: Test figure of Radiated emissions, Mode C, Below 1GHz, Horizontal




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ian2015-2 #42	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2015/01/27
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: Charging	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

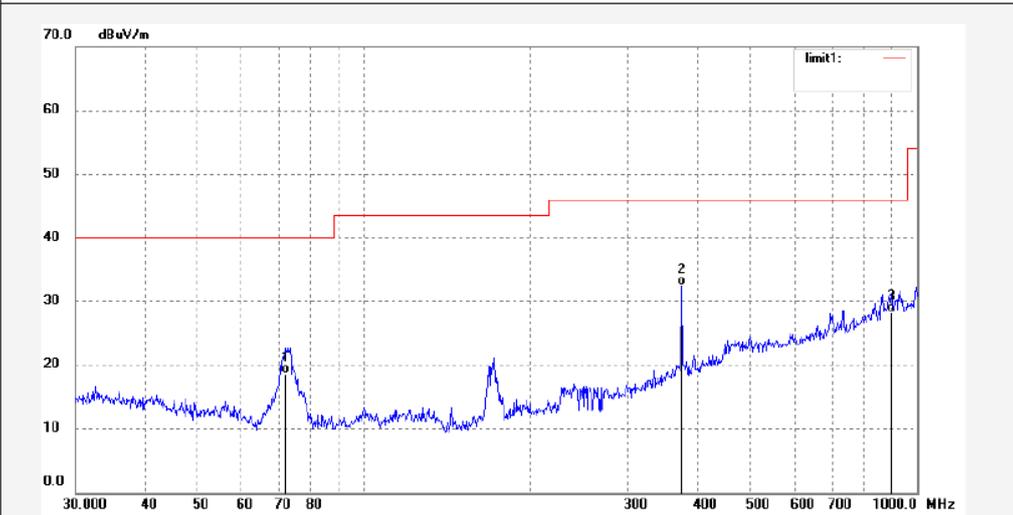

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	72.0841	35.02	-16.38	18.64	40.00	-21.36	QP			
2	375.9384	39.89	-7.42	32.47	46.00	-13.53	QP			
3	900.1471	27.04	1.28	28.32	46.00	-17.68	QP			

Figure 38: Test figure of Radiated emissions, Mode C, Below 1GHz, Vertical




ACCURATE TECHNOLOGY CO., LTD.
F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Ian2015-2 #41	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2015/01/27
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: Charging	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

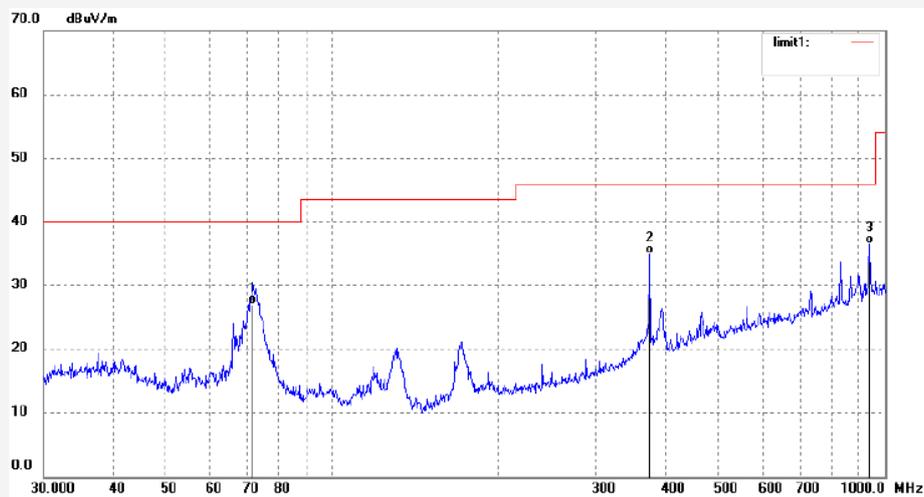

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	71.4339	43.41	-16.29	27.12	40.00	-12.88	QP			
2	375.8567	42.38	-7.42	34.96	46.00	-11.04	QP			
3	938.7545	34.61	1.89	36.50	46.00	-9.50	QP			

Figure 39: Test figure of Radiated emissions, Mode C, Above 1GHz, Horizontal




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015-2 #123	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2015/01/27
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: Charging	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

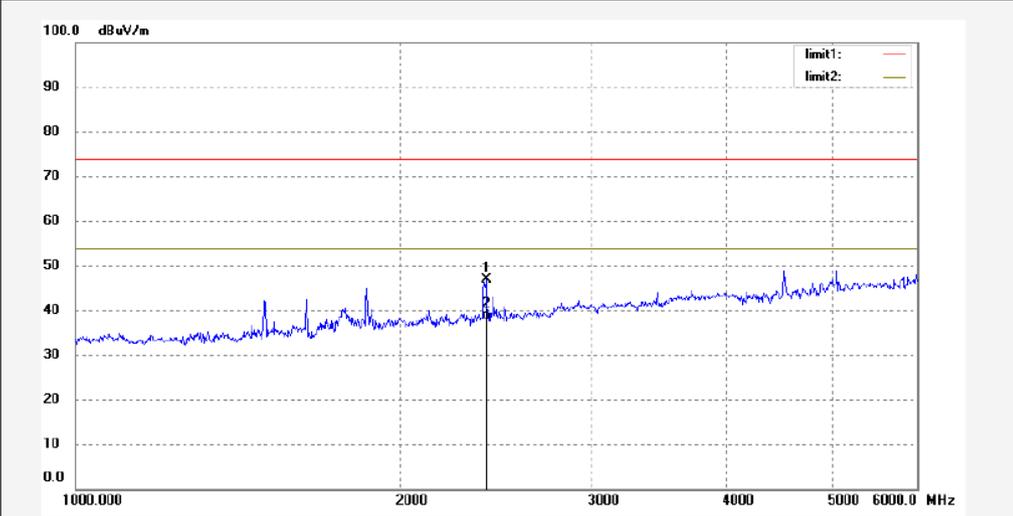

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2397.385	54.27	-7.48	46.79	74.00	-27.21	peak			
2	2397.385	45.25	-7.48	37.77	54.00	-16.23	AVG			

Figure 40: Test figure of Radiated emissions, Mode C, Above 1GHz, Vertical




ACCURATE TECHNOLOGY CO., LTD.
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
 Tel:+86-0755-26503290
 Fax:+86-0755-26503396

Job No.: Ian2015-2 #124	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 5V
Test item: Radiation Test	Date: 2015/01/27
Temp.(C)/Hum.(%) 23 C / 48 %	Time:
EUT: TalkBand	Engineer Signature:
Mode: Charging	Distance: 3m
Model: B2	
Manufacturer: GoerTek Inc.	

Note:

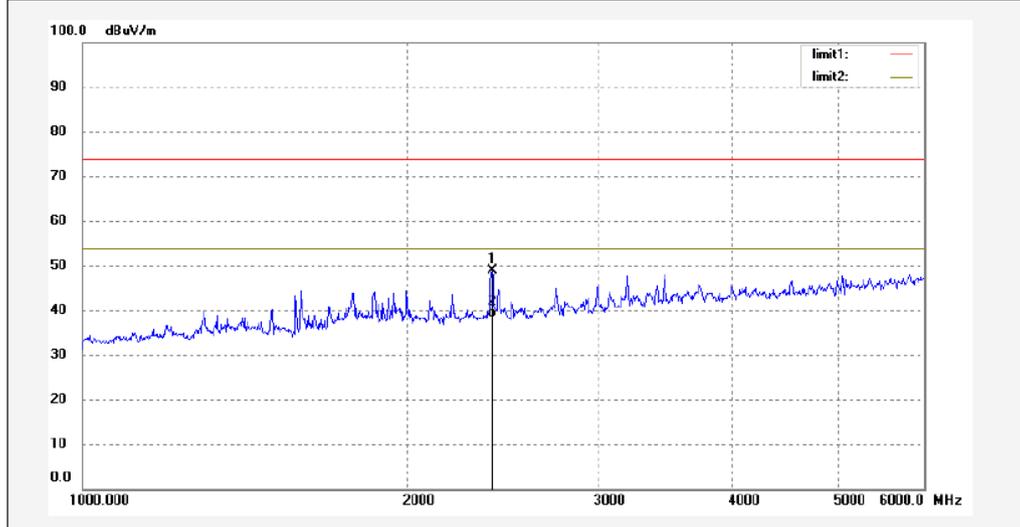

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2393.093	56.31	-7.51	48.80	74.00	-25.20	peak			
2	2393.093	45.89	-7.51	38.38	54.00	-15.62	AVG			