



# FCC RF Test Report

**Product Name: LTE CPE**

**Model Number: B593u-12**

**Report No: SYBH(Z-RF)004052012-2001**

**FCC ID:QISB593U-12**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518



## Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Huawei Base, Bantian, Longgang District, Shenzhen  
 518129, P.R. China  
**Date of Receipt Test Item:** Apr.26, 2012  
**Start Date of Test:** Apr.27, 2012  
**End Date of Test:** May.05, 2012

**Test Result:** Pass

Approved By Senior Engineer May.07, 2012 Dai Linjun *Dailinjun*  
 Date Name Signature

Reviewed By May.07, 2012 Cousy Xu *Cousy XU*  
 Date Name Signature

Operator May.07, 2012 Huang Qiuliang *Huang Qiuliang*  
 Date Name Signature



## Contents

<b>1</b>	<b><u>General Information</u></b> .....	<b>5</b>
1.1	APPLIED STANDARD.....	5
1.2	TEST LOCATION.....	5
1.3	TEST ENVIRONMENT CONDITION .....	5
<b>2</b>	<b><u>Summary</u></b> .....	<b>6</b>
<b>3</b>	<b><u>Product Description</u></b> .....	<b>7</b>
3.1	PRODUCT INFORMATION .....	7
<b>4</b>	<b><u>Test Description</u></b> .....	<b>8</b>
4.1	SUPPORTED FREQUENCY RANGE .....	8
4.2	TRANSMITTER / RECEIVER CHARACTERISTICS.....	8
4.3	ANTENNA GAIN.....	8
4.4	POWER SUPPLY .....	8
<b>5</b>	<b><u>General Test Conditions / Configurations</u></b> .....	<b>9</b>
5.1	RF CHANNELS UNDER TEST.....	9
5.2	TEST MODES.....	9
5.3	TEST ENVIRONMENTS .....	9
5.4	TEST SETUPS.....	10
5.5	TEST CONDITIONS .....	12
<b>6</b>	<b><u>Main Test Instruments</u></b> .....	<b>14</b>
<b>7</b>	<b><u>Test Results</u></b> .....	<b>15</b>
<b>8</b>	<b><u>Measurement Uncertainty</u></b> .....	<b>15</b>

# 1 General Information

<b>1.1 Applied Standard</b>	
Applied Rules:	47 CFR FCC Part 2:2010, Subpart J 47 CFR FCC Part 22:2010, Subpart H ANSI/TIA 603C:2004
<b>1.2 Test Location</b>	
Test Location 1:	Reliability Laboratory of Huawei Technologies Co., Ltd.
Address:	Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China
<b>1.3 Test Environment Condition</b>	
Ambient Temperature:	20 – 25 °C
Ambient Relative Humidity:	45 – 55 %
Atmospheric Pressure:	101 kPa



## 2 Summary

### Summary of results

Test Case	FCC Part No.	Requirements	Result
Cellular Band			
Transmitter Output Power	2.1046 & 22.913	ERP not exceed 7 W Peak-to-average ratio not exceed 13 dB	Pass
Modulation Characteristics	2.1047	Digital modulation	Pass
Occupied Bandwidth	2.1049	(Not specified)	Pass
Band Edges Compliance	2.1051 & 917	Below -13 dBm/1%*EBW, in 1 MHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 2.917	Below -13 dBm/1 kHz, 9 kHz to 150 kHz Below -13 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 <sup>th</sup> harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 22.917	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 22.355	Maintained within the tolerances of $\pm 2.5$ ppm	Pass

### 3 Product Description

#### 3.1 Product Information

##### 3.1.1 General Description

B593u-12 LTE/WCDMA/GSM three mode 11 bands CPE is subscriber equipment in the LTE/UMTS/GSM system. B593u-12 implement such functions as RF signal receiving/transmitting, LTE/WCDMA/GSM protocol processing, data service etc. WIFI including 11b/g/n provides an wireless access. Externally it provides USB interface (to connect to the printer etc.), USIM card interface , RJ45 Ethernet interface and RJ11 telephone interface. B593u-12 has two internal antenna and two External Antenna, can automatic switch.

##### 3.1.2 Board Information

Board Information

LTE CPE		
B593u-12		
Board and Module		
Router Board	Software Version	Modem Board
B593RW2A	V100R001	MD1EM92012UM

##### 3.1.3 Adapter Technical Data

AC/DCAdapter Model	HW-120200U1W
Manufacturer	FUHUA
Input Voltage	90Vac~270Vac 50/60Hz 0.8A
Output Voltage	+12V 2.0A
Rated Power	24W(max)

AC/DCAdapter Model	HW-120200U1W
Manufacturer	HuntKey
Input Voltage	90Vac~270Vac 50/60Hz 0.8A
Output Voltage	+12V 2.0A
Rated Power	24W(max)

## 4 Test Description

### 4.1 Supported Frequency Range

Characteristics	Description
Downlink	869 to 894 MHz;
Uplink	824 to 849 MHz

### 4.2 Transmitter / Receiver Characteristics

Characteristics	Description
System Type	GSM
TX Output Power (per Antenna Port)	GSM system: 33dBm;
Channel Spacing(s) / Bandwidth(s)	GSM system: 200 kHz
Designation of Emissions	GSM system: 246KGXW (GMSK modulation), 242KG7W (8PSK modulation)

### 4.3 Antenna Gain

Antenna Gain(dBi)	1
Antenna Gain(dBd)	-1.15

### 4.4 Power Supply

Specification	Description
Power Supply Type	Directly Connected to DC /AC Power Supply
Input to EUT (DC power)	DC Voltage Nominal: $\equiv$ 12 V
Input to EUT (AC power)	AC Voltage Nominal: ~ 220 V (50/60 Hz) AC Voltage Range: ~90-270V

## 5 General Test Conditions / Configurations

### 5.1 RF Channels under Test

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
TM1/TM2	TX	Channel 128	Channel 192	Channel 251
		824.2MHz	837.0MHz	848.8MHz
	RX	Channel 128	Channel 192	Channel 251
		869.2MHz	882.0MHz	893.8MHz

### 5.2 Test Modes

Test Mode	Test Modes Description
TM1	GSM/GPRS, GMSK modulation
TM2	EDGE, 8PSK modulation

### 5.3 Test Environments

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	9.6V
	VN	12V
	VH	14.4V


NOTE: VL= lower extreme test voltages  
VN= nominal voltage  
VH= upper extreme test voltage  
TN= normal temperature

## 5.4 Test Setups


### 5.4.1 General Test Setup Configurations

Configuration	Description
Test Antenna Ports	Until otherwise declared, all TX tests are ONLY performed at the main Transmitter antenna port (e.g. TRXA, TXA and so on) of the EUT, and all RX tests are ONLY performed at the main Receiver antenna port (e.g. TRXA, RXA and so on) of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

### 5.4.2 Test Setup 1

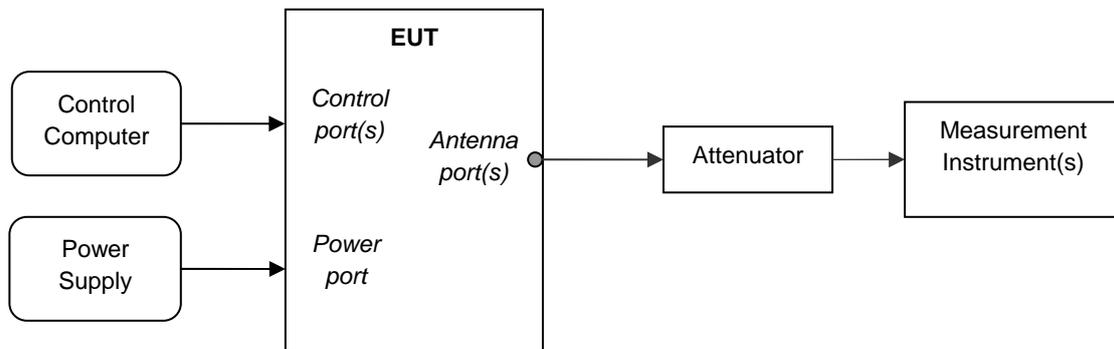


### 5.4.3 Test Setup 2

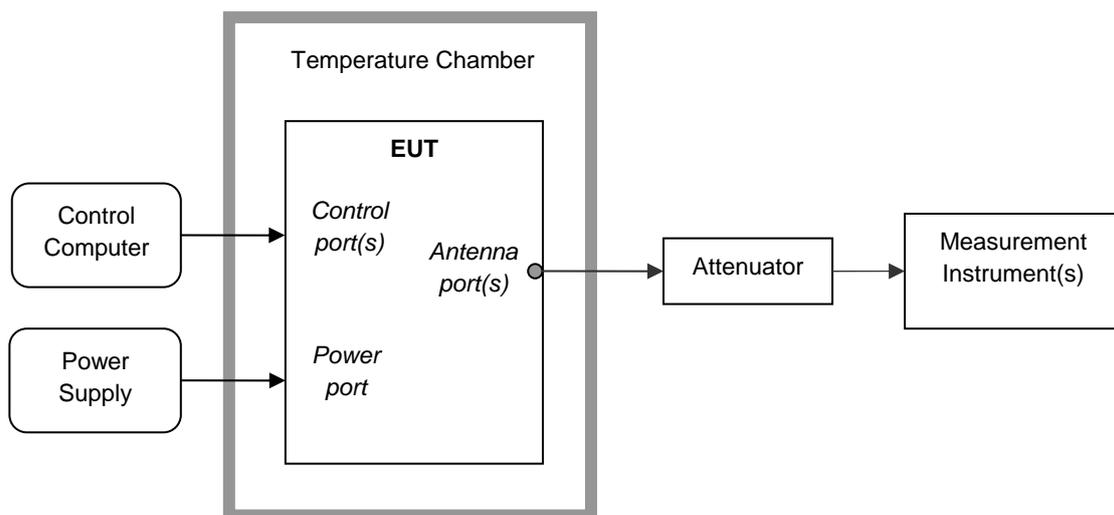


### 5.4.4 Test Setup 3

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

#### Step 1: Pre-test

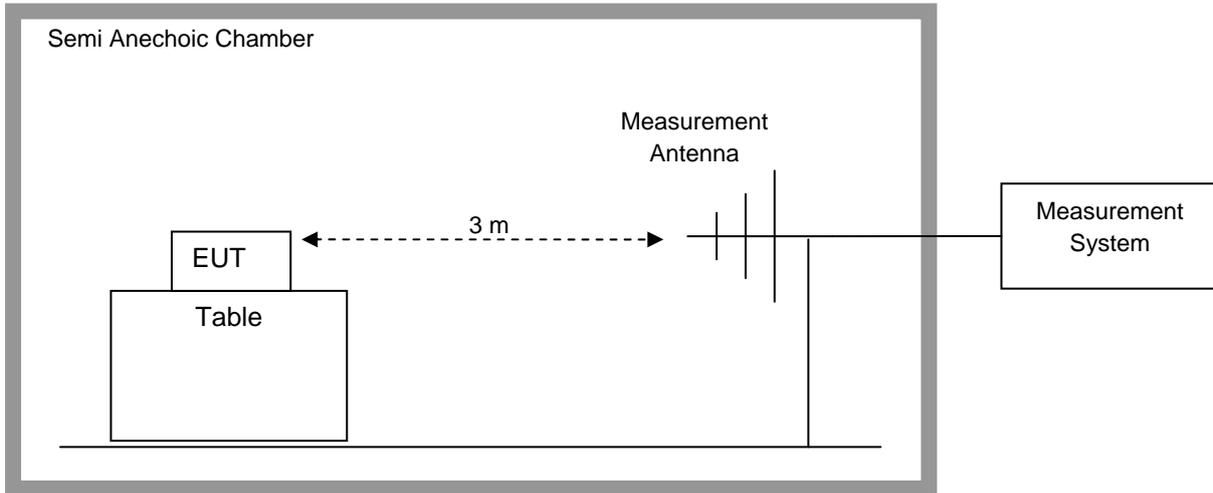

#### Step 2: Substitution method to verify the maximum ERP

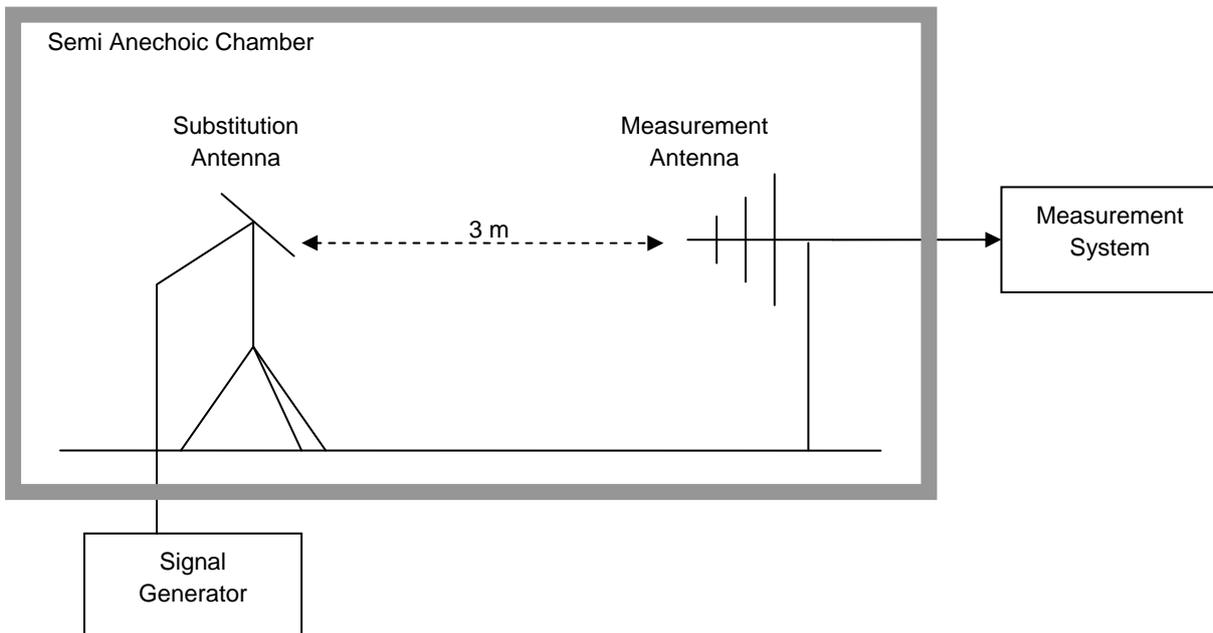

## 5.5 Test Conditions

Test Case	Test Conditions	
Transmitter Output Power	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1 & Test Setup 3
	Detector	RMS
	RBW	RBW > emission bandwidth
	VBW	VBW > 3 x RBW
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Modulation Characteristics	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Occupied Bandwidth	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Band Edges Compliance	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	RMS
	RF Channels (TX)	B, T
	Test Mode	TM1/TM2
Spurious Emission at Antenna Terminals	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 1
	Detector	PK
	RF Channels (TX)	B, M, T
	Test Mode	TM1/TM2
Field Strength of Spurious Radiation	Test Configuration	Ambient Temperature & Rated Voltage
	Test Setup	Test Setup 3
	Detector	PK
	RF Channels (TX)	M
	Test Mode	TM1/TM2
Frequency Stability	Test Configuration	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) 85%, 100% and 115% of Rated Voltage at Ambient



Test Case	Test Conditions	
		Temperature.
	Test Setup	Test Setup 2
	RF Channels (TX)	M
	Test Mode	TM1/TM2

## 6 Main Test Instruments

Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Power supply	KEITHLEY	2303	1288003	Sep.27,2012
Universal Radio Communication Tester	R&S	CMU200	117341	Jan.12.2013
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.31,2012
Spectrum Analyzer	Agilent	E4440A	MY48250119	Jul.17,2012
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2012
Temperature Chamber	WEISS	WKL64	24600294	Feb.13,2013
Signal generator	Agilent	E8257D	MY49281095	Jul.09.2012
Test receiver	R&S	ESU26	100150	May.29.2012
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Jan.29.2013
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Jan.29.2013
Horn Antenna	R & S	HF906	100683	May.15, 2012
Horn Antenna	R & S	HF906	100684	Jul.01, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-357	May.15, 2012
Broadband Antenna	Schwarzbeck	VULB 9163	9163-356	May.15, 2012

Note: All the equipments are calibrated once a year. When it's almost due, we will arrange calibration again before the calibration deadline.

## 7 Test Results

No.	Test Item	Test Result
1	Transmitter Output Power	Appendix A
2	Modulation Characteristics	Appendix B
3	Occupied Bandwidth	Appendix C
4	Band Edges Compliance	Appendix D
5	Spurious Emission at Antenna Terminals	Appendix E
6	Field Strength of Spurious Radiation	Appendix F
7	Frequency Stability	Appendix G
8	Photos of Field Strength of Spurious Radiation	Appendix H

NOTE: The Appendix H only photos of Field Strength of Spurious Radiation, no test data.

## 8 Measurement Uncertainty

For a 95% confidence level ( $k=2$ ), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmitter Output Power	Power (dBm)	U =0.39 dB
Occupied Bandwidth	Magnitude (%)	U=0.2%
Band Edge Compliance	Disturbance Power (dBm)	U=2.0 dB
Conducted Spurious Emissions	Disturbance Power (dBm)	U=2.0 dB
Field Strength of Spurious Radiation	ERP (dBm)	U=4.6 dB (30 MHz – 1GHz) U=3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy (ppm)	U=0.21 ppm

-----The END-----