



FCC RF Test Report

Product Name: Wireless Gateway

Model Number: B660

**Report No: SYBH(Z-RF)009052011-2001
FCC ID: QISB660-54A**

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
3. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-2.
4. The test report is invalid if not marked with "exclusive stamp for the test report".
5. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
8. Normally, the test report is only responsible for the samples that have undergone the test.
9. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Notice 2

Modification Information:

Modification Information

Modification Information	1	
	2	
	3	<i>Not Applicable!</i>
	4	
	5	
	6	
	7	



REGULATION	FCC CFR47 Part 2: Subpart J;
	FCC CFR47 Part 22 : Subpart H;
START OF TEST	Apr.23, 2011
END OF TEST	Apr.25, 2011
Final Judgement:	Pass

Approved By May.03, 2011 Chen xiaohong Chen Xiaohong
Date Name Signature

Reviewed By May.03, 2011 Xu guangyi Xuguangyi
Date Name Signature

Operator By May.03, 2011 Lu Xiaoguang Lu Xiaoguang
Date Name Signature



Contents

1	<u>Summary</u>	6
2	<u>Product Description</u>	7
2.1	PRODUCTION INFORMATION	7
2.2	MODIFICATION INFORMATION	7
3	<u>Test Site Description</u>	9
3.1	TESTING PERIOD.....	9
3.2	GENERAL SET UP DESCRIPTION.....	9
4	<u>Product Description</u>	10
4.1	TECHNICAL CHARACTERISTICS.....	10
4.2	EUT IDENTIFICATION LIST.....	12
5	<u>Main Test Instruments</u>	13
6	<u>Transmitter Measurements</u>	14
6.1	EFFECTIVE RADIATED POWER OF TRANSMITTER (ERP).....	14
6.2	CONDUCTED POWER OF TRANSMITTER	19
6.3	MODULATION CHARACTERISTICS.....	22
6.4	OCCUPIED BANDWIDTH.....	24
6.5	BAND EDGES COMPLIANCE	27
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL.....	30
6.7	RADIATED SPURIOUS EMISSIONS	33
6.8	FREQUENCY STABILITY	36
7	<u>System Measurement Uncertainty</u>	41
8	<u>Appendices</u>	42

1 Summary

The table below summarizes the measurements and results for the EUT. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	22.913	Effective Radiated Power of Transmitter	PASS
2.1046	22.913	Conducted Power of Transmitter	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	22.917	Band Edges compliance	PASS
2.1051	22.917	Spurious Emission at Antenna Terminal	PASS
2.1053	22.917	Radiated Spurious Emissions	PASS
2.1055	22.355	Frequency Stability	PASS

2 Product Description

2.1 Production Information

2.1.1 General Description

HUAWEI B660 Wireless Gateway is subscriber equipment in the UMTS/GSM system, also supports wireless Internet accessing function, routing function, and network address translation (NAT) function. The WCDMA frequency is Band II and Band V. The GSM/GPRS/EDGE frequency band includes GSM850,GSM 1900 the WLAN frequency is 2.4G.

GSM850 transmitt frequenvy is 824-849MHZ .and Receive Frequency is 869-894 MHZ ;GSM1900 transmitt frequenvy is 1850-1910MHZ .and Receive Frequency is1930-1990 MHZ; WCDMA 850 transmitt frequenvy is 824-849MHZ .and Receive Frequency is 869-894MHZ. WCDMA1900 transmitt frequenvy is 1850-1910MHZ .and Receive Frequency is1930-1990 MHZ. The WLAN frequenvy range is 2400-2483.5MHZ

B660 implements such functions as RF signal receiving/transmitting, HSPA/ WCDMA and EDGE/GPRS/GSM protocol processing, data service, etc. USIM card interface, RJ11 interface (to connect to fixed telephone), RJ45 interface (to connect to pc) and external antenna interface. It has four internal antennas as default.

Product Technical Data

Note: F201 can be powered by DC Power supply in this report.

2.1.2 Support function and Service

The EUT support the function and service as follows:

Table 2 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: GMSK	TM1	GPRS/GSM
Data	Modulation: 8PSK	TM2	EDGE
Data	Modulation: QPSK	TM3	WCDMA
Data	Modulation: QPSK	TM4	HSDPA
Data	Modulation: 16QAM	TM5	HSUPA

Note: * The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V5.4.0 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V5.4.0.The WCDMA test condition & settings are defined in 3GPP TS 34.121 V8.7.0:2009.

2.2 Modification Information

For original equipment, following table is not application.

Table 3 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				





3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

Apr.23, 2011 –Apr.25, 2011

3.2 General Set up Description

TM1: GSM/GPRS Mode with GMSK Modulation

TM2: EDGE Mode with 8PSK Modulation

TM3: WCDMA Mode with QPSK Modulation

TM4: HSDPA Mode with QPSK Modulation

TM5: HSUPA Mode with 16QAM Modulation

4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Table 4 Frequency Range

Uplink band:	824 to 849 MHz
Downlink band:	869 to 894 MHz

4.1.2 Channel Spacing / Separation

Table 5 Channel Spacing / Separation

	EDGE/GPRS/GSM	UMTS/HSPA
Channel Raster	200kHz	200kHz
Channel Spacing:	200kHz	5MHz

4.1.3 Type of Emission

Table 6 Type of Emission

	GPRS/GSM	EDGE	UMTS/HSPA
Emission Designation:	300KGXW	300KG7W	5M00F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Table 7 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Table 8 Power Source

AC voltage nominal:	~ 120 V
AC voltage range	~ 100 V to ~ 240 V
AC current maximal:	1A

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 9 Applied RF module DC Voltages and Currents

Voltage:	≡ +5.0 V
Current:	2 A According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)

4.2 EUT Identification List

4.2.1 Board Information

Table 10 Board Information

Wireless Gateway		
B660		
Main board of Wireless Gateway		
Hardware Version	Serial Number	
WL1B683I001	020SJG10A4800045	

4.2.2 Adapter Technical Data

Name	Manufacture	Serials number	Description
Adapter	Huawei Technologies CO.,LTD	UEFAC0100982	Adapter Model: HW-050200U2W voltage nominal: ~230V Input Voltage : 100-240V ~50/60Hz, 0.2A Output Voltage: == 5.0V 2A Rated Power: 10W

4.2.3 FCC Identification

Grantee Code: QIS
Product Code: B660-54A
FCC Identification: QISB660-54A

5 Main Test Instruments

Table 1 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Universal Radio Communication Tester	R&S	CMW 500	103216	Nov.26,2011
Power supply	KEITHLEY	2303	1288003	Sep.27,2011
Universal Radio Communication Tester	R&S	CMU200	105822	Oct.24,2011
Wireless Communication Test set	Agilent	N4010A	MY49081592	Dec.14,2011
Universal Radio Communication Tester	Agilent	E5515C	MY50260239	Aug.04,2011
Signal Analyzer	R&S	FSQ31	200021	Sep.27,2011
Temperature Chamber	WEISS	WKL64	24600294	Jan.25,2012
Signal generator	Agilent	E8257D	MY49281095	Jul.09.2011
Vector Signal Generator	R&S	SMU200A	104162	Sep.07,2011
Test receiver	R&S	ESU26	36090302083	Jun.24.2011
EMI Test receiver	R&S	FSQ43	100048	Jun.23,2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	919/1009	Dec.13,2011
Tunable Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	Dec.13,2011
Horn Antenna	R & S	HF906	359287/005	May.07, 2012
Horn Antenna	R & S	HF906	359287/006	Apr.27, 2012
Horn Antenna	R & S	HF906	100684	Jun.28,2011
Broadband Antenna	SCHAFFNER	CBL 6112B	2536	Sep.21, 2011
Broadband Antenna	SCHAFFNER	CBL 6112B	2941	Jun.21, 2011
Broadband Antenna	SCHAFFNER	VULB 9163	9163-357	Sep.28,2011
Horn Antenna	ETS-LINDGREN	3160	60008	Sep.20,2011
Horn Antenna	ETS-LINDGREN	3160	91989	Sep.28,2011

6 Transmitter Measurements

6.1 Effective Radiated Power of Transmitter (ERP)

6.1.1 Test Conditions

Table 2 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at Channel Bottom, Middle, Top

6.1.2 Test Specifications and Limits

6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 22 subpart H

6.1.2.2 Supporting Standards

Table 3 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.2.3 Limits

Compliance with part 22.913, mobile/portable stations are limited to 7 watts ERP peak power.
 $W \text{ (dBm)} = 10 * \log (W_{\text{in mW}})$.

Table 4 Limits

Maximum Output Power (Watts)	< 7 Watts
Maximum Output Power (dBm)	< 38.5 dBm


6.1.3 Test Method and Setup

- For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the air interface. The band is set as 850M.
- Test the Radiated maximum output power by the CMU200 received from test antenna.

- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.
- (d) RMS detector was used for this test.

Test setup

Step 1: Pre-test

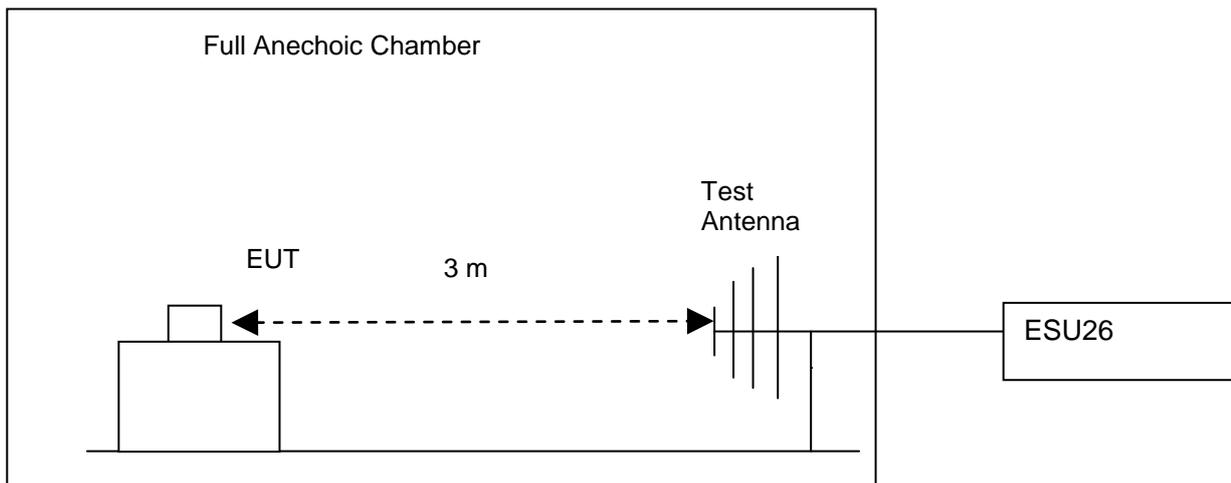

Step 2: Substitution method to verify the maximum ERP

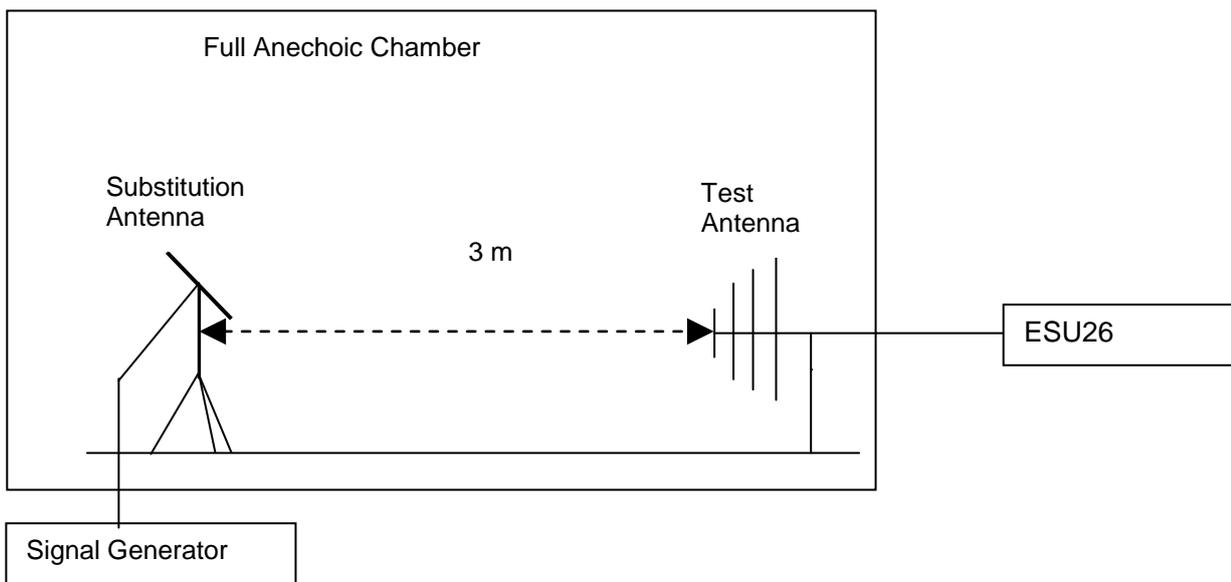


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

ERP was measured using 1 host.

6.1.4 Measurement Results

For HSDPA test mode, there are 4 sub-test for different configuration. For the sub-test 1, The channel is Middle range.

HSDPA conducted max power pre-scan

Sub-test	βc	βd	βd (SF)	$\beta c/\beta d$	HS	CM (dB)	MPR (dB)	Test result
1	2/15	15/15	64	2/15	4/15	0	0	22.32
2	12/15	15/15	64	12/15	24/15	1	0	22.15
3	15/15	8/15	64	15/8	30/15	1.5	0.5	21.53
4	15/15	4/15	64	15/4	30/15	1.5	0.5	21.45

For HSUPA test mode, there are 5 sub-tests for different configuration. For the sub-test 1-5, The channel is Middle range.

HSUPA conducted max power pre-scan

Sub-test	$\beta c/\beta d$	βHS	βec	βed	βed (SF)	βed (Codes)	CM (dB)	MPR (dB)	Test result
1	11/15	16/15	16/15	448/75	4	1	1.0	0.0	21.93
2	6/15	12/15	12/15	94/75	4	1	3.0	2.0	21.23
3	15/9	30/15	30/15	$\beta ed1$: 47/15	4	2	2.0	1.0	21.10
4	2/15	2/15	2/15	56/75	4	1	3.0	2.0	20.99
5	15/15	24/15	24/15	224/25	4	1	1.0	0.0	21.70

6.1.4.1 Pre-test Results

TEST CONDITIONS	RF Output Power (ERP)					
	Channel 128(B)		Channel 192(M)		Channel 251(T)	
	824.2MHz		837.0MHz		848.8MHz	
	dBm		dBm		dBm	
T_{nom} (25 °C)/ V_{nom} (5.0V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	31.60	38.5	31.54	38.5	31.56	38.5
TM2	25.30	38.5	25.42	38.5	25.31	38.5
TEST CONDITIONS	Channel 4132(B)		Channel 4182(M)		Channel 4233(T)	

	826.4MHz		836.4MHz		846.6MHz	
	dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (5.0V)	Measured	Limit	Measured	Limit	Measured	Limit
TM3	21.42	38.5	21.34	38.5	21.38	38.5
TM4	21.32	38.5	21.17	38.5	21.30	38.5
TM5	20.49	38.5	20.78	38.5	20.70	38.5

6.1.4.2 Substitution Results

Table 5 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP)	FCC limit [dBm]	Result
				[dBm]			[dBm]		
TM1	824.2	31.60	Dipole Ant.	34.96	-2.75	0.6	31.61	38.5	Pass
TM1	837.0	31.54	Dipole Ant.	34.96	-2.87	0.6	31.49	38.5	Pass
TM1	848.8	31.56	Dipole Ant.	35.03	-2.85	0.6	31.58	38.5	Pass
TM2	824.2	25.30	Dipole Ant.	28.59	-2.75	0.6	25.24	38.5	Pass
TM2	837.0	25.42	Dipole Ant.	28.82	-2.87	0.6	25.35	38.5	Pass
TM2	848.8	25.31	Dipole Ant.	28.73	-2.85	0.6	25.28	38.5	Pass
TM3	826.4	21.42	Dipole Ant.	24.72	-2.75	0.6	21.37	38.5	Pass
TM3	836.4	21.34	Dipole Ant.	24.75	-2.87	0.6	21.28	38.5	Pass
TM3	846.6	21.38	Dipole Ant.	24.74	-2.85	0.6	21.29	38.5	Pass
TM4	826.4	21.32	Dipole Ant.	24.58	-2.75	0.6	21.23	38.5	Pass
TM4	836.4	21.17	Dipole Ant.	24.58	-2.87	0.6	21.11	38.5	Pass
TM4	846.6	21.30	Dipole Ant.	24.68	-2.85	0.6	21.23	38.5	Pass
TM5	826.4	20.49	Dipole Ant.	23.79	-2.75	0.6	20.44	38.5	Pass
TM5	836.4	20.78	Dipole Ant.	24.18	-2.85	0.6	20.73	38.5	Pass
TM5	846.6	20.70	Dipole Ant.	24.22	-2.87	0.6	20.75	38.5	Pass

Note: a, For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level



b, RBW=10kHz, VBW=300kHz,

6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.



6.2 Conducted Power of Transmitter

6.2.1 Test Conditions

Table 6 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at Channel Bottom, Middle, Top

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

6.2.2.2 Supporting Standards

Table 7 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.2.3 Limits

Compliance with part 22.913, in no any case may the peak power of a mobile station transmitter exceed 7 W. The calculated longitude ERP by following formula:

$$ERP(\text{dBm}) = 10 \cdot \log(ERP_{\text{in watts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{\text{cod}}(\text{dBm}) = ERP(\text{dBm}) - \text{Gain}(\text{dBd}).$$

and $\text{Gain}(\text{dBd}) = \text{Gain}(\text{dBi}) - 2.15\text{dB}$

Table 8 Limits

Maximum Output Power (Watts)	< 7 Watts(38.5dBm)
Antenna Gain(dBi):	1.0

Antenna Gain(dBd):	-1.15
Maximum Conducted Output Power (dBm)	< 39.65

6.2.3 Test Method and Setup

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the wireless communication tester CMU200 via the antenna connector. The band class is set as US Cellular.
- (b) Test the Conducted maximum output power by the CMU200.
- (c) RMS detector was used for this test.

Test setup

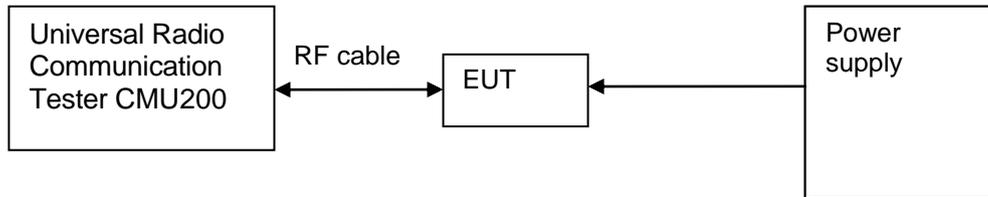


Figure 2. Test Set-up

6.2.4 Measurement Results

Table 9 Measurement Results

TEST CONDITIONS	RF Output Power (Conducted)					
	Channel 128(B) 824.2MHz		Channel 192(M) 837.0MHz		Channel 251(T) 848.8MHz	
	dBm		dBm		dBm	
T _{nom} (25 °C)/ V _{nom} (5.0V)	Measured	Limit	Measured	Limit	Measured	Limit
TM1	32.75	39.65	32.69	39.65	32.71	39.65
TM2	26.54	39.65	26.57	39.65	26.46	39.65
TEST CONDITIONS	Channel 4132(B) 826.4MHz		Channel 4182(M) 836.4MHz		Channel 4233(T) 846.6MHz	



	dBm		dBm		dBm	
	Measured	Limit	Measured	Limit	Measured	Limit
T_{nom} (25 °C)/ V_{nom} (5.0V)						
TM3	22.57	39.65	22.49	39.65	22.53	39.65
TM4	22.47	39.65	22.32	39.65	22.45	39.65
TM5	21.64	39.65	21.93	39.65	21.85	39.65

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.3 Modulation Characteristics

6.3.1 Test Conditions

Table 10 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3 at frequency Middle

6.3.2 Test Specifications and Limits

6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

6.3.2.2 Supporting Standards

Table 11 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 22 subpart H.

Table 12 Limits

Limits	Not applicable
--------	----------------

6.3.3 Test Method and Setup

Connect the EUT to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as 850M; the EUT's output is matched with 50 Ω load, test method was according to 3GPP TS 51.010 and 3GPP TS 34.121. The waveform quality and constellation of the EUT was tested.

Test setup

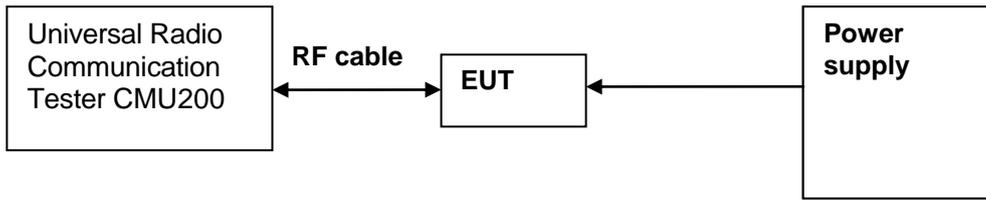


Figure 3. Test Set-up

6.3.4 Measurement Results

Table 13 Measurement Results

TEST CONDITIONS		Modulation Characteristic	
		Channel 192(M) 837MHz	
		Measured	
		TM1	TM2
T _{nom} (25 °C)	V _{nom} (5.0V)	Refer to Appendix A	Refer to Appendix A
TEST CONDITIONS		Modulation Characteristic	
		Channel 4182(M) 836.4MHz	
		Measured	
		TM3	
T _{nom} (25 °C)	V _{nom} (5.0V)	Refer to Appendix A	

6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A.

6.4 Occupied Bandwidth

6.4.1 Test Conditions

Table 14 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3/TM5 at frequency Bottom, Middle, Top

6.4.2 Test Specifications and Limits

6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 22 subpart H.

6.4.2.2 Supporting Standards

Table 15 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.4.2.3 Limits

No specific occupied bandwidth requirement in part 22 subpart H, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 16 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.4.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector. The band class is set as 850M; the EUT was controlled to transmit maximum power. Measure and record the occupied bandwidth of the EUT by the R&S FSQ31.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The

level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3/TM5 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

Test Set-up

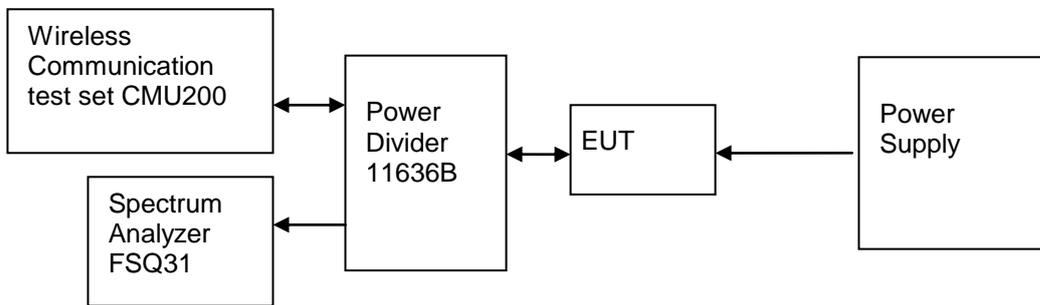


Figure 4. Test Set-up

6.4.4 Measurement Results

Table 17 Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
Center Frequency		Channel128(B) 824.2MHz		Channel192(M) 837.0MHz		Channel251(T) 848.8MHz	
		Measured (kHz)		Measured (kHz)		Measured (kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
T _{nom} (25 °C)/ V _{nom} (5.0V)	99%	243.59	250.00	246.79	241.99	243.59	246.79
Center Frequency		Channel4132(B) 826.4MHz		Channel192(M) 836.4MHz		Channel4233(T) 846.6MHz	
		Measured (MHz)		Measured (MHz)		Measured (MHz)	



		TM3	TM3	TM3
T_{nom} (25 °C)/ V_{nom} (5.0V)	99%	4.17	4.20	4.18
		TM5	TM5	TM5
T_{nom} (25 °C)/ V_{nom} (5.0V)	99%	4.18	4.18	4.18

6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix B.

All relevant operation modes have been tested, and the worst case data is included in this report.

6.5 Band Edges Compliance

6.5.1 Test Conditions

Table 18 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3/TM5 at frequency Bottom, Top

6.5.2 Test Specifications and Limits

6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part22 Subpart H

6.5.2.2 Supporting Standards

Table 19 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.5.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P (W)$. (Where as P is the rated power of the EUT).

Table 20 Limits

	TM1	TM2	TM3/TM5
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log (2) = 46$, 33 dBm - 46 dB	$43 + 10 \log (0.5) = 40$, 27 dBm - 40 dB	$43 + 10 \log (0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.5.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the band class is set as 850M. The EUT was controlled to transmit maximum power. Measure and record

band edges compliance of the EUT by the R&S FSQ31.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3/TM5 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 200 kHz

Test Set-up

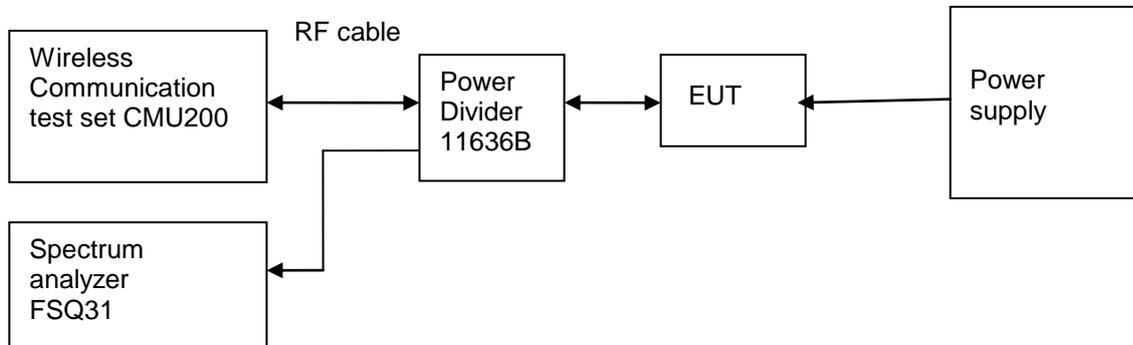


Figure 5. Test Set-up

6.5.4 Measurement Results

Table 21 Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
$T_{nom} (25\text{ }^{\circ}\text{C}), V_{nom} (5.0\text{V})$						
Cellular	824.2	128	TM1	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM1	<-13(See appendix C)	- 13 dBm	Pass
	824.2	128	TM2	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM2	<-13(See appendix C)	- 13 dBm	Pass
	826.4	4132	TM3	<-13(See appendix C)	- 13 dBm	Pass
	846.6	4233	TM3	<-13(See appendix C)	- 13 dBm	Pass
	826.4	4132	TM5	<-13(See appendix C)	- 13 dBm	Pass
	846.6	4233	TM5	<-13(See appendix C)	- 13 dBm	Pass



6.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix C.

All relevant operation modes have been tested, and the worst case data is included in this report.

6.6 Spurious Emission at Antenna Terminal

6.6.1 Test Conditions

Table 22 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	50 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom, Middle, Top

6.6.2 Test Specifications and Limits

6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and Part22 Subpart H

6.6.2.2 Supporting Standards

Table 23 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.6.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 24 Limits

	TM1	TM2	TM3
Rated Power:	33dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$, 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$, 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSQ31 via the one RF connector, the

band class is set as 850M. The EUT was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the EUT by the R&S FSQ31.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

- Measurement bandwidth (RBW) for 9 kHz up to 150 KHz: 1 kHz;
- Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
- Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 100 kHz;
- Measurement bandwidth (RBW) for 1 GHz up to 12.75 GHz: 1 MHz;

Test Set-up

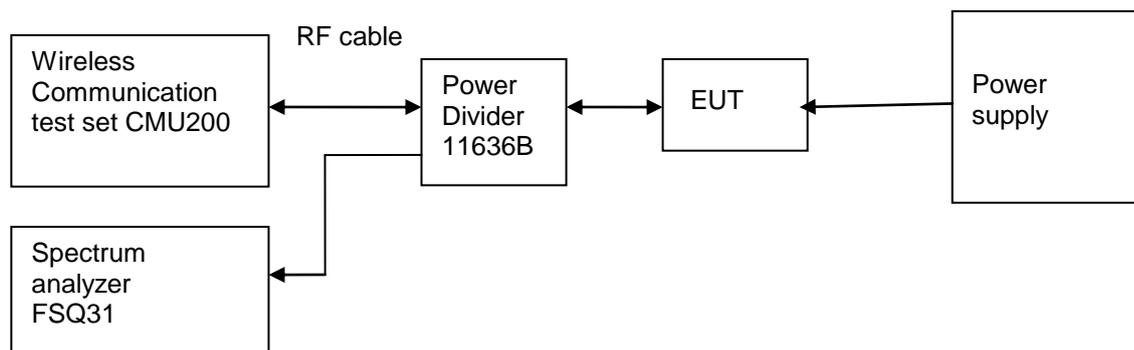


Figure 6. Test Set-up

6.6.4 Measurement Results

Table 25 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 128(B)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4132(B)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 192(M)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4182(M)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

Channel 251(T)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4233(T)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

6.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D.

All relevant operation modes have been tested, and the worst case data is included in this report.

6.7 Radiated Spurious Emissions

6.7.1 Test Conditions

Table 26 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at frequency Middle

6.7.2 Test Specifications and Limits

6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 22.917

6.7.2.2 Supporting Standards

Table 27 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.7.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 28 Limits

Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log(0.25) = 37$, 24 dBm – 37 dB
Absolute level	- 13 dBm

6.7.3 Test Method and Setup

A test site fulfilling the requirements of ITU-R Recommendation SM329-11 was used. The EUT was placed on a non-conducting support in the anechoic chamber and was operated from a power source via an RF filter to avoid radiation from the power leads.

PK detector was used for this test.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.


Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
 Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
 Measurement bandwidth (RBW) for 30MHz up to 1GHz: 100k Hz;
 Measurement bandwidth (RBW) for 1GHz up to 18GHz: 1MHz;

Test Set-up

Step 1:


For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the EUT to the BTS simulator via the air interface.

Test the Radiated maximum output power by the Test Receiver from test antenna.

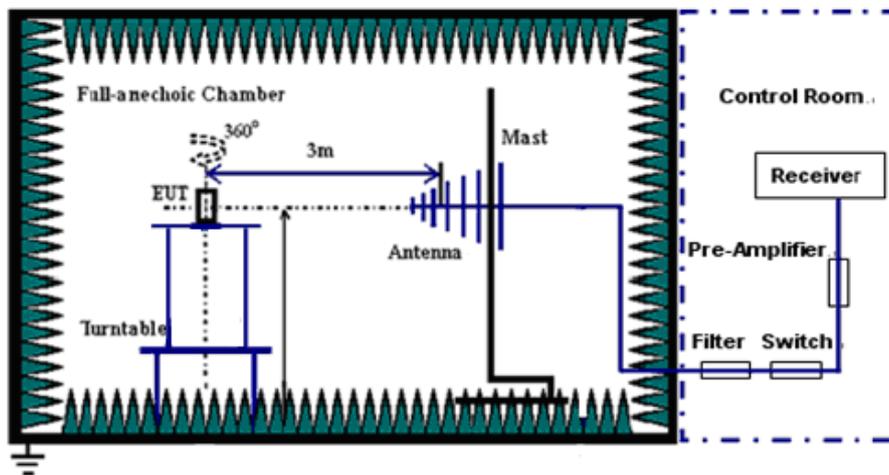

Step 2:

Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step1 on Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

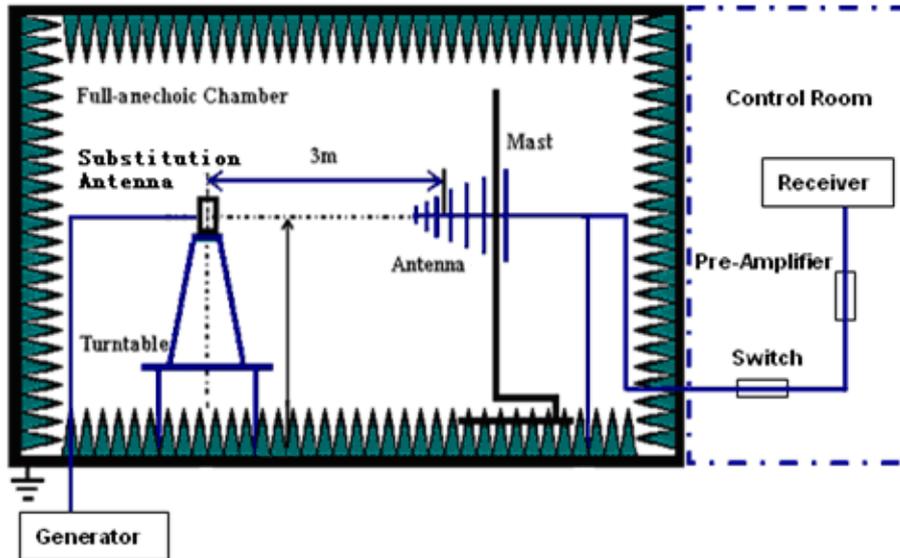

Test should be performed in normal voltage condition.

No peak found in pre- test. All frequency points' margin is bigger than 20dB, so the substitution method isn't used.

Calculation Sample:

Table 29 Substitution Results

Freq. [MHz]	Measurement Value [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$E.R.P. [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$

NOTE: SGP- Signal Generator Level

6.7.4 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix_E

All relevant operation modes have been tested, and the worst case data is included in this report.

6.8 Frequency Stability

6.8.1 Test Conditions

Table 30 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3/TM5 at frequency Middle

6.8.2 Test Specifications and Limits

6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and Part22 Subpart H

6.8.2.2 Supporting Standards

Table 31 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V8.7.0:2009	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.8.2.3 Limits

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

Test Set up

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

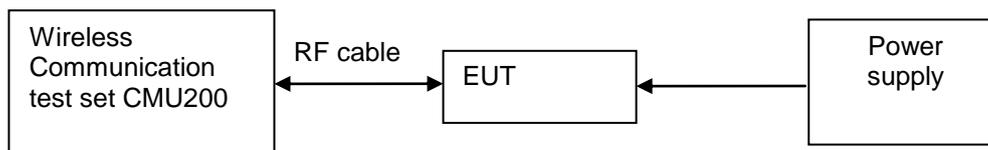


Figure 7. Test Set up

6.8.4 Measurement Results

6.8.4.1 Measurement Results vs. Variation of Temperature

- **TM1, 5.0V DC Channel No.192(837.0MHz)**

Table 32 Measurement Results vs. Variation of Temperature – TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	837.0	-15	Pass
-20 °C	837.0	-12	Pass
-10 °C	837.0	-10	Pass
0 °C	837.0	9	Pass
+10 °C	837.0	16	Pass
+20 °C	837.0	-11	Pass
+30 °C	837.0	5	Pass
+40 °C	837.0	19	Pass
+50 °C	837.0	-11	Pass

● **TM2, 5.0V DC Channel No.192(837.0MHz)**

Table 33 Measurement Results vs. Variation of Temperature – TM2

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	837.0	-13	Pass
-20 °C	837.0	16	Pass
-10 °C	837.0	-14	Pass
0 °C	837.0	11	Pass
+10 °C	837.0	6	Pass
+20 °C	837.0	17	Pass
+30 °C	837.0	-14	Pass
+40 °C	837.0	-8	Pass
+50 °C	837.0	17	Pass

● **TM3, 5.0V DC Channel No.4182(836.4MHz)**

Table 34 Measurement Results vs. Variation of Temperature – TM3

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	836.4	16	Pass
-20 °C	836.4	-17	Pass
-10 °C	836.4	-11	Pass
0 °C	836.4	3	Pass
+10 °C	836.4	-6	Pass
+20 °C	836.4	-11	Pass
+30 °C	836.4	-7	Pass
+40 °C	836.4	15	Pass
+50 °C	836.4	-12	Pass

● **TM5, 5.0V DC Channel No.4182(836.4MHz)**

Table 35 Measurement Results vs. Variation of Temperature – TM3

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	836.4	13	Pass
-20 °C	836.4	11	Pass
-10 °C	836.4	-9	Pass
0 °C	836.4	5	Pass
+10 °C	836.4	-11	Pass
+20 °C	836.4	-9	Pass
+30 °C	836.4	-6	Pass
+40 °C	836.4	7	Pass
+50 °C	836.4	-15	Pass

6.8.4.2 Measurement Results vs. Variation of Voltage

● **TM1, 25 °C ,Channel No. 192(837.0MHz)**

Table 36 Measurement Results vs. Variation of Voltage – TM1

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
4.25 V	837.0	-4	Pass
5.0V	837.0	19	Pass
5.75V	837.0	-8	Pass

● **TM2, 25 °C ,Channel No. 192(837.0MHz)**

Table 37 Measurement Results vs. Variation of Voltage – TM2

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
4.25 V	837.0	-15	Pass
5.0V	837.0	17	Pass
5.75V	837.0	-14	Pass

- **TM3, 25 °C ,Channel No. 4182(836.4MHz)**

Table 38 Measurement Results vs. Variation of Voltage – TM3

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
4.25 V	836.4	-6	Pass
5.0V	836.4	-17	Pass
5.75V	836.4	16	Pass

- **TM5, 25 °C ,Channel No. 4182(836.4MHz)**

Table 39 Measurement Results vs. Variation of Voltage – TM3

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
4.25 V	836.4	7	Pass
5.0V	836.4	4	Pass
5.75V	836.4	-9	Pass

6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 40 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	ERP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2



8 Appendices

Appendix A	Measurement Results Modulation Characteristics	4 pages
Appendix B	Measurement Results Occupied Bandwidth	10 Pages
Appendix C	Measurement Results Band Edges	7 Pages
Appendix D	Measurement Results Spurious Emission at Antenna Terminal	37 Pages
Appendix E	Measurement Results Radiated Spurious Emissions	19 Pages
Appendix F	Photos of Radiated Spurious Emissions	4 Pages

(END OF REPORT)