



# FCC

# RF Test Report

**Product Name: LTE Wireless Gateway**

**Model Number: B882-66**

**Report No: SYBH(Z-RF)018032014-2001**

**FCC ID: QISB882-66**

**IC: 6369A-B88266**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



## Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-2.
5. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
6. The test report is invalid if there is any evidence of erasure and/or falsification.
7. The test report is only valid for the test samples.
8. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
 Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt Sample:** 2014-03-27  
**Start Date of Test:** 2014-03-27  
**End Date of Test:** 2014-03-31

**Test Result:** Pass

<b>Approved by Senior Engineer:</b>	2014-04-02	Liu Chunlin	
	Date	Name	Signature

<b>Prepared by:</b>	2014-04-02	Feng Nianwei	
	Date	Name	Signature



**Modification Record**

No.	Last Report No.	Modification Description
1		First report.



## CONTENT

1	General Information.....	6
1.1	Applied Standard.....	6
1.2	Test Location .....	6
1.3	Test Environment Condition.....	6
2	Test Summary .....	7
2.1	Cellular Band (824-849 MHz paired with 869-894 MHz) .....	7
2.2	PCS Band (1850-1915 MHz paired with 1930-1995 MHz).....	8
2.3	AWS Band (1710-1755 MHz paired with 2110-2155 MHz).....	9
2.4	BRS&EBS Band (2496-2690 MHz).....	10
2.5	Band (699-716MHz paired with 727-746 MHz) .....	11
2.6	Band (777-787MHz paired with 746-756 MHz) .....	12
2.7	Band (704-716MHz paired with 734-746 MHz) .....	13
3	Description of the Equipment under Test (EUT).....	14
3.1	General Description .....	14
The following table shows the 2 Models. ....		14
3.2	EUT Identity .....	16
3.3	Technical Specification .....	17
4	General Test Conditions / Configurations.....	20
4.1	Test Modes .....	20
4.2	Test Environment.....	20
4.3	Test Frequency .....	21
4.4	DESCRIPTION OF TESTS .....	29
4.5	Test Setups.....	32
4.6	Test Conditions .....	34
5	Main Test Instruments .....	36
6	Measurement Uncertainty.....	37





## 2 Test Summary

### 2.1 Cellular Band (824-849 MHz paired with 869-894 MHz)

Test Item	FCC Rule No.	IC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §22.913	RSS-Gen, §4.8; RSS-132, §5.4	FCC: ERP ≤ 7 W. IC: EIRP ≤ 11.5 W.	Pass
Modulation Characteristics	§2.1047	RSS-132, §5.2	Digital modulation	Pass
Bandwidth	§2.1049	RSS-Gen, §4.6	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §22.917	RSS-Gen, §4.9; RSS-132, §5.5	≤ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §22.917	RSS-Gen, §4.9; RSS-132, §5.5	FCC: ≤ -13 dBm/100 kHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges. IC: ≤ -13 dBm/100 kHz (for EBW ≤ 4 MHz) or ≤ -13 dBm/1 MHz (for EBW > 4 MHz), from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §22.917	RSS-Gen, §4.9; RSS-132, §5.5	FCC: ≤ -13 dBm/100 kHz. IC: ≤ -13 dBm/100 kHz (for EBW ≤ 4 MHz) or ≤ -13 dBm/1 MHz (for EBW > 4 MHz).	Pass
Frequency Stability	§2.1055, §22.355	RSS-Gen, §4.7; RSS-132, §5.3	≤ ±2.5ppm.	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

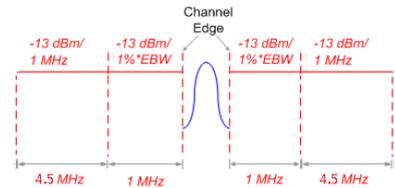
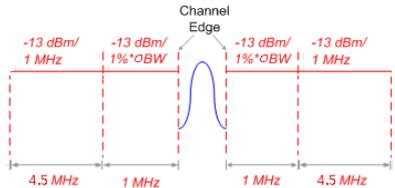
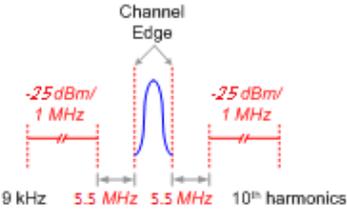
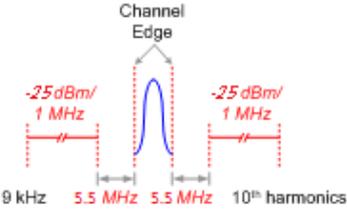
**2.2 PCS Band (1850-1915 MHz paired with 1930-1995 MHz)**

Test Item	FCC Rule No.	IC Rule No.	Requirements	Verdict (NOTE 1)
Effective (Isotropic) Radiated Power Output Data	§2.1046, §24.232	RSS-Gen, §4.8; RSS-133, §6.4	EIRP $\leq$ 2 W	Pass
Modulation Characteristics	§2.1047	RSS-133, §6.2	Digital modulation	Pass
Bandwidth	§2.1049	RSS-Gen, §4.6	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §24.238	RSS-Gen, §4.9; RSS-133, §6.5	$\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §24.238	RSS-Gen, §4.9; RSS-133, §6.5	$\leq$ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §24.238	RSS-Gen, §4.9; RSS-133, §6.5	$\leq$ -13 dBm/1 MHz.	Pass
Frequency Stability	§2.1055, §24.235	RSS-Gen, §4.7; RSS-133, §6.3	FCC: within authorized frequency block. IC: $\leq$ $\pm$ 2.5 ppm.	Pass
NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

### 2.3 AWS Band (1710-1755 MHz paired with 2110-2155 MHz)

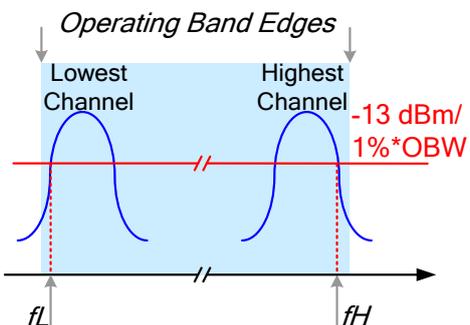
Test Item	FCC Rule No.	IC Rule No.	Requirements	Verdict (NOTE 1)
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(d)	RSS-Gen, §4.8; RSS-139, §6.4	EIRP $\leq$ 1 W	Pass
Modulation Characteristics	§2.1047	RSS-139, §6.2	Digital modulation	Pass
Bandwidth	§2.1049	RSS-Gen, §4.6	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §27.53(h)	RSS-Gen, §4.9; RSS-139, §6.5	$\leq$ -13 dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	RSS-Gen, §4.9; RSS-139, §6.5	$\leq$ -13 dBm/1 MHz, from 9 kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(h)	RSS-Gen, §4.9; RSS-139, §6.5	$\leq$ -13 dBm/1 MHz.	Pass
Frequency Stability	§2.1055, §27.54	RSS-Gen, §4.7; RSS-139, §6.3	Within authorized bands of operation/frequency block.	Pass
NOTE1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".				

## 2.4 BRS&EBS Band (2496-2690 MHz)

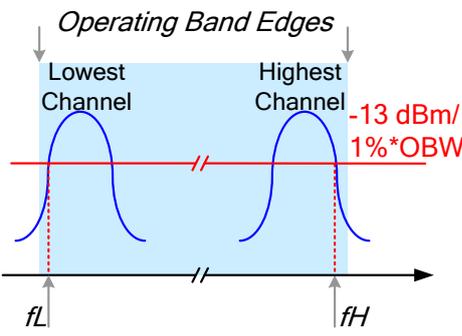
Test Item	FCC Rule No.	IC Rule No.	Requirements	Verdict (NOTE 1)
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)	RSS-Gen, §4.8; RSS-199, §4.4	EIRP ≤ 2W	Pass
Modulation Characteristics	§2.1047	RSS-199, §4.1	Digital modulation	Pass
Bandwidth	§2.1049	RSS-Gen, §4.2	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §27.53(m)	RSS-Gen, §4.9; RSS-199, §4.5; RSS-199, §4.2	FCC:  IC: 	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	RSS-Gen, §4.9; RSS-199, §4.5; RSS-199, §4.2		Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	RSS-Gen, §4.9; RSS-199, §4.5		Pass
Frequency Stability	§2.1055, §27.54	RSS-Gen, §4.7; RSS-199, §4.3	Within authorized bands of operation/frequency block.	Pass

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" denotes "not tested".

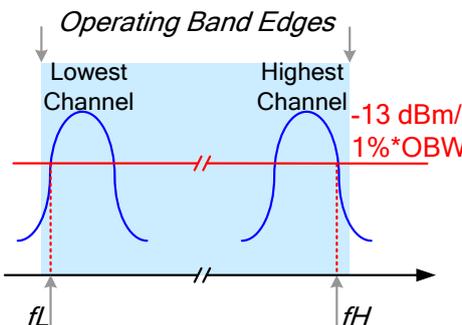
**2.5 Band (699-716MHz paired with 727-746 MHz)**

Test Case	FCC Part No.	IC Part No.	Requirements	Result
<b>699 – 716MHz Band (LTE Band 12)</b>				
Transmitter Output Power	2.1046 & 27.50(c)	RSS-Gen,§4.8; RSS-130,§4.4	FCC: Avg ERP not exceed 3 W IC: Avg ERP not exceed 5 W PARP ≤ 13 dB	Pass
Modulation Characteristics	2.1047	RSS-130,§4.1	Digital modulation	Pass
Occupied Bandwidth	2.1049	RSS-Gen,§4.6	(Not specified)	Pass
Band Edges Compliance	2.1051 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -13 dBm/30 kHz, in 100 kHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 <sup>th</sup> harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 27.54	RSS-Gen,§4.7; RSS-130,§4.3	<p>FCC: Within authorized bands of operation/frequency block.</p> <p>IC: f(offset): no limit. fL –  f(offset)  &gt; Operating Band Left Edge, fH +  f(offset)  &lt; Operating Band Right Edge.</p> 	Pass

**2.6 Band (777-787MHz paired with 746-756 MHz)**

Test Case	FCC Part No.	IC Part No.	Requirements	Result
<b>775-793MHz Band (LTE Band 13)</b>				
Transmitter Output Power	2.1046 & 27.50(b)(10)	RSS-Gen,§4.8; RSS-130,§4.4	FCC: Avg ERP not exceed 3 W IC: Avg ERP not exceed 5 W Peak-to-average ratio not exceed 13 dB	Pass
Modulation Characteristics	2.1047	RSS-130,§4.1	Digital modulation	Pass
Occupied Bandwidth	2.1049	RSS-Gen,§4.6	(Not specified)	Pass
Band Edges Compliance	2.1051 & 27.53(c)(2) & 27.53(c)(5)	RSS-Gen,§4.9; RSS-130,§4.6	Below -13 dBm/30 kHz, in 100 kHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 27.53(c)(2) & 27.53(c)(5)	RSS-Gen,§4.9; RSS-130,§4.6	Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 <sup>th</sup> harmonics	Pass
Field Strength of Spurious Radiation	2.1051 & 27.53(c)(2) & 27.53(c)(5)	RSS-Gen,§4.9; RSS-130,§4.6	Below -13 dBm/100kHz	Pass
Frequency Stability	2.1055 & 27.54	RSS-Gen,§4.7; RSS-130,§4.3	FCC: Within authorized bands of operation/frequency block. IC: f(offset): no limit. fL –  f(offset)  > Operating Band Left Edge, fH +  f(offset)  < Operating Band Right Edge. 	Pass

**2.7 Band (704-716MHz paired with 734-746 MHz)**

Test Case	FCC Part No.	IC Part No.	Requirements	Result
<b>704-716MHz Band (LTE Band 17)</b>				
Transmitter Output Power	2.1046 & 27.50(c)	RSS-Gen,§4.8; RSS-130,§4.4	FCC: Avg ERP not exceed 3 W IC: Avg ERP not exceed 5 W PARP ≤ 13 dB	Pass
Modulation Characteristics	2.1047	RSS-130,§4.1	Digital modulation	Pass
Occupied Bandwidth	2.1049	RSS-Gen,§4.6	(Not specified)	Pass
Band Edges Compliance	2.1051 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -13 dBm/30 kHz, in 100 kHz range	Pass
Spurious Emission at Antenna Terminals	2.1051 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -33 dBm/1 kHz, 9 kHz to 150 kHz Below -23 dBm/10 kHz, 150 kHz to 30 MHz Below -13 dBm/100 kHz, 30 MHz to 10 <sup>th</sup> harmonics	Pass
Field Strength of Spurious Radiation	2.1053 & 27.53(g)	RSS-Gen,§4.9; RSS-130,§4.6	Below -13 dBm/100 kHz	Pass
Frequency Stability	2.1055 & 27.54	RSS-Gen,§4.7; RSS-130,§4.3	<p>FCC: Within authorized bands of operation/frequency block.</p> <p>IC: f(offset): no limit. fL –  f(offset)  &gt; Operating Band Left Edge, fH +  f(offset)  &lt; Operating Band Right Edge.</p> 	Pass



### 3 Description of the Equipment under Test (EUT)

#### 3.1 General Description

HUAWEI LTE Wireless Gateway–B882-66 is subscriber equipment in the WCDMA/LTE system, also supports wireless Internet accessing function, routing function, network address translation (NAT) function. The HSPA+/WCDMA frequency band is Band 2/4/5. The LTE frequency band includes Band 2/4/5/7/12/13/17. And the TX/RX band is 2400MHz~2483MHz for WLAN. B882-66 implements such functions as RF signal receiving/sending, WCDMA and LTE protocol processing, voice and data service etc. Externally it provides one USIM card interface, one phone interface, one power interface and four auto-sensing Ethernet interfaces.

NOTE: B890-66 and B882-66 have the same PCB and same internal antenna, the difference is B882-66 delete external antenna ports, delete USB port interface by hardware, and they have the different appearance.

The following table shows the 2 Models.

	B890-66	B882-66
HSPA/WCDMA 1900M/AWS/850M	support	support
LTE Band 2/4/5/7/12/13/17	support	support
WCDMA and LTE internal antenna	The same	The same
WCDMA and LTE external antenna ports	Support	No support, <b>delete by hardware</b>
WiFi 2.4G 11(b+g+n) ,2*2	Support	Support
WiFi antenna	The same	The same
PCB layout	The same	The same
USB port interface	Support	No support, <b>delete by hardware</b>
Four RJ45 ports	Support	Support
RJ11 port	Support	Support
Adatpter	HW-120200U6W	HW-120200U6W
Enclosure and appearance	Not the same	Not the same
Other Accessory	No	No

NOTE1: So the WCDMA B2 and LTE B2 test Transmitter Output Power and Field Strength of Spurious Radiation, other refer to **SYBH(Z-RF)004092012-2001** of B890-66.

So the WCDMA B4 and LTE B4 test Transmitter Output Power and Field Strength of Spurious Radiation, other refer to **SYBH(Z-RF)004092012-2002** of B890-66.

So the WCDMA B5 and LTE B5 test Transmitter Output Power and Field Strength of Spurious Radiation, other refer to **SYBH(Z-RF)004092012-2003** of B890-66.

So the LTE B7 test Transmitter Output Power and Field Strength of Spurious Radiation, other refer to **SYBH(Z-RF)004092012-2004** of B890-66.

So the LTE B12 test Transmitter Output Power and Field Strength of Spurious Radiation, other refer to **SYBH(Z-RF)004092012-2005** of B890-66.



So the LTE B13 test Transmitter Output Power and Field Strength of Spurious Radiation, other refer to **SYBH(Z-RF)004092012-2006** of B890-66.

So the LTE B17 test Transmitter Output Power and Field Strength of Spurious Radiation, other refer to **SYBH(Z-RF)004092012-2007** of B890-66.

The 2.4G wifi test case refer to **SYBH(Z-RF)004092012-2008** of B890-66.

NOTE2: All the Transmitter Output Power and Field Strength of Spurious Radiation test data see the appendix.



### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

#### 3.2.1 Board

Board		
Serial Number	Hardware Version	Description
N5M01A9412200123	HW-120200U6W	Main Board

#### 3.2.2 Adapter

Name	Manufacture	Description
Adapter	HUAWEI Technologies Co.LTD.	Adapter Model: HW-120100U6W voltage nominal: ~120V Input Voltage : 100-240V ~50/60Hz, Output Voltage: == 12V 1A Rated Power: 12W



### 3.3 Technical Specification

Characteristics	Description	
Radio System Type	<input checked="" type="checkbox"/> UMTS <input checked="" type="checkbox"/> LTE	
Supported Frequency Range	GSM850/ WCDMA850	Transmission (TX): 824 to 849 MHz
		Receiving (RX): 869 to 894 MHz
	GSM1900/ WCDMA1900	Transmission (TX): 1850 to 1910 MHz
		Receiving (RX): 1930 to 1990 MHz
	WCDMA1700	Transmission (TX): 1710 to 1755 MHz
		Receiving (RX): 2110 to 2155 MHz
	LTE BAND2	Transmission (TX): 1850 to 1910 MHz
		Receiving (RX): 1930 to 1990 MHz
	LTE BAND4	Transmission (TX): 1710 to 1755 MHz
		Receiving (RX): 2110 to 2155 MHz
	LTE BAND5	Transmission (TX): 824 to 849 MHz
		Receiving (RX): 869 to 894 MHz
	LTE BAND7	Transmission (TX): 2500 to 2570 MHz
		Receiving (RX): 2620 to 2690 MHz
LTE BAND13	Transmission (TX): 777 to 787 MHz	
	Receiving (RX): 746 to 756 MHz	
LTE BAND17	Transmission (TX): 704 to 716 MHz	
	Receiving (RX): 734 to 746 MHz	
TX and RX Antenna Ports	TX & RX port:	1
	TX-only port:	0
	RX-only port:	1
Target TX Output Power	UMTS850 24dBm UMTS1900: 24dBm UMTS1700 24dBm LTE system: 23dBm	
Supported Channel Bandwidth	UMTS system:	<input checked="" type="checkbox"/> 5 MHz
	LTE band2	<input checked="" type="checkbox"/> 1.4 MHz, <input checked="" type="checkbox"/> 3 MHz, <input checked="" type="checkbox"/> 5 MHz, <input checked="" type="checkbox"/> 10 MHz, <input checked="" type="checkbox"/> 15 MHz, <input checked="" type="checkbox"/> 20 MHz
	LTE band4	<input checked="" type="checkbox"/> 1.4 MHz, <input checked="" type="checkbox"/> 3 MHz, <input checked="" type="checkbox"/> 5 MHz, <input checked="" type="checkbox"/> 10 MHz, <input checked="" type="checkbox"/> 15 MHz, <input checked="" type="checkbox"/> 20 MHz
	LTE band5	<input checked="" type="checkbox"/> 1.4 MHz, <input checked="" type="checkbox"/> 3 MHz, <input checked="" type="checkbox"/> 5 MHz, <input checked="" type="checkbox"/> 10 MHz,
	LTE band 7	<input checked="" type="checkbox"/> 5 MHz, <input checked="" type="checkbox"/> 10 MHz, <input checked="" type="checkbox"/> 15 MHz, <input checked="" type="checkbox"/> 20 MHz



Characteristics	Description	
	LTE band12	<input checked="" type="checkbox"/> 1.4 MHz, <input checked="" type="checkbox"/> 3 MHz, <input checked="" type="checkbox"/> 5 MHz, <input checked="" type="checkbox"/> 10 MHz,
	LTE band13	<input checked="" type="checkbox"/> 5 MHz, <input checked="" type="checkbox"/> 10 MHz,
	LTE band17	<input checked="" type="checkbox"/> 5 MHz, <input checked="" type="checkbox"/> 10 MHz,
Designation of Emissions (Note: the necessary bandwidth of which is the worst value from the measured occupied bandwidths for each type of channel bandwidth configuration.)	UMTS850:	4M17F9W
	UMTS1900:	4M19F9W
	UMTS1700:	4M17F9W
	LTE BAND 2:	1M09G7D (1.4MHz ,QPSK modulation), 1M09W7D (1.4 MHz ,16QAM modulation), 2M69G7D (3MHz ,QPSK modulation), 2M68W7D (3 MHz ,16QAM modulation), 4M47G7D (5MHz ,QPSK modulation), 4M48W7D (5 MHz ,16QAM modulation), 8M97G7D (10 MHz QPSK modulation), 8M95W7D (10 MHz 16QAM modulation), 13M4G7D (15 MHz QPSK modulation), 13M4W7D (15 MHz 16QAM modulation), 17M9G7D (20 MHz QPSK modulation), 17M9W7D (20 MHz 16QAM modulation),
	LTE BAND 4:	1M09G7D (1.4MHz ,QPSK modulation), 1M08W7D (1.4 MHz ,16QAM odulation), 2M69G7D (3MHz ,QPSK modulation), 2M68W7D (3 MHz ,16QAM modulation), 4M48G7D (5MHz ,QPSK modulation), 4M48W7D (5 MHz ,16QAM modulation), 8M95G7D (10 MHz QPSK modulation), 8M94W7D (10 MHz 16QA Mmodulation), 13M5G7D (15 MHz QPSK modulation), 13M5W7D (15 MHz 16QAM modulation), 17M9G7D (20 MHz QPSK modulation), 17M9W7D (20 MHz 16QAM modulation),
LTE BAND 5:	1M09G7D (1.4MHz ,QPSK modulation), 1M08W7D (1.4 MHz ,16QAM modulation), 2M69G7D (3MHz ,QPSK modulation), 2M69W7D (3 MHz ,16QAM modulation), 4M48G7D (5MHz ,QPSK modulation), 4M48W7D (5 MHz ,16QAM modulation), 8M96G7D (10 MHz QPSK modulation), 8M94W7D (10 MHz 16QAM modulation),	
LTE BAND 7:	4M48G7D (5 MHz ,QPSK modulation),	

Characteristics	Description	
		4M48W7D (5 MHz ,16QAM modulation), 8M96G7D (10 MHz QPSK modulation), 8M95W7D (10 MHz 16QAM modulation), 13M44G7D (15MHz QPSK modulation), 13M43W7D (15MHz 16QAM modulation), 17M88G7D (20 MHz QPSK modulation), 17M89W7D (20 MHz 16QAM modulation)
	LTE BAND 12:	1M09G7D (1.4 MHz ,QPSK modulation), 1M09W7D (1.4 MHz ,16QAM modulation), 2M69G7D (3 MHz QPSK modulation), 2M68W7D (3 MHz 16QAM modulation), 4M48G7D (5MHz QPSK modulation), 4M48W7D (5MHz 16QAM modulation), 8M95G7D (10 MHz QPSK modulation), 8M96W7D (10 MHz 16QAM modulation),
	LTE BAND 13:	4M48G7D (5 MHz ,QPSK modulation), 4M48W7D (5 MHz ,16QAM modulation), 8M95G7D (10 MHz QPSK modulation), 8M94W7D (10 MHz 16QAM modulation),
	LTE BAND 17:	4M47G7D (5 MHz ,QPSK modulation), 4M49W7D (5 MHz ,16QAM modulation), 8M96G7D (10 MHz QPSK modulation), 8M96W7D (10 MHz 16QAM modulation),



## 4 General Test Conditions / Configurations

### 4.1 Test Modes

NOTE: The test mode(s) are selected according to relevant radio technology specifications.

Test Mode	Test Modes Description
UMTS/TM1	WCDMA system, QPSK modulation
UMTS/TM2	HSDPA system, QPSK modulation
UMTS/TM3	HSUPA system, QPSK modulation
LTE/TM1	LTE system, QPSK modulation
LTE/TM2	LTE system, 16QAM modulation

NOTE: HSPA+ implementation of this device, 16QAM is not used for uplink. The uplink Category and release number is same as HSUPA, RF test is not required.

### 4.2 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	10.8V
	VN	12V
	VH	13.2V

NOTE: VL= lower extreme test voltage  
VN= nominal voltage  
VH= upper extreme test voltage  
TN= normal temperature

### 4.3 Test Frequency

Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
WCDMA1900	TX	Channel 9262	Channel9400	Channel9538
		1852.4MHz	1880.0MHz	1907.6MHz
	RX	Channel 9662	Channel 9800	Channel 9938
		1932.4 MHz	1960.0 MHz	1987.6 MHz
LTE BAND 2	TX(1.4M)	Channel 18607	Channel 18900	Channel 19193
		1850.7MHz	1880 MHz	1909.3 MHz
	RX(1.4M)	Channel 607	Channel 900	Channel 1193
		1930.7 MHz	1960 MHz	1989.3 MHz
	TX(3M)	Channel 18615	Channel 18900	Channel 19185
		1851.5MHz	1880 MHz	1908.5 MHz
	RX(3M)	Channel 615	Channel 900	Channel1185
		1931.5 MHz	1960 MHz	1988.5 MHz
	TX(5M)	Channel 18625	Channel 18900	Channel 19175
		1852.5 MHz	1880 MHz	1907.5 MHz
	RX(5M)	Channel 625	Channel 900	Channel 1175
		1932.5 MHz	1960 MHz	1987.5 MHz
	TX(10M)	Channel 18650	Channel 18900	Channel 19150
		1855 MHz	1880 MHz	1905 MHz
	RX(10M)	Channel 650	Channel 900	Channel 1150
		1935 MHz	1960 MHz	1985 MHz
	TX(15M)	Channel 18675	Channel 18900	Channel 19125
		1857.5 MHz	1880 MHz	1902.5 MHz



Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
	RX(15M)	Channel 675	Channel 900	Channel 1125
		1937.5 MHz	1960 MHz	1982.5 MHz
	TX(20M)	Channel 18700	Channel 18900	Channel 19100
		1860 MHz	1880 MHz	1900 MHz
	RX(20M)	Channel 700	Channel 900	Channel 1100
		1940 MHz	1960 MHz	1980 MHz



Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
WCDMA1700	TX	Channel1312(B)	Channel1412(M)	Channel1513(T)
		1712.4MHz	1732.4MHz	1752.6MHz
	RX	Channel 1537	Channel 1637	Channel 1738
		2112.4 MHz	2132.4 MHz	2152.6 MHz
LTE BAND 4	TX(1.4M)	Channel 19957	Channel 20175	Channel 20393
		1710.7MHz	1732.5 MHz	1754.3 MHz
	RX(1.4M)	Channel 1957	Channel 2175	Channel 2393
		2110.7 MHz	2132.5MHz	2154.3 MHz
	TX(3M)	Channel 19965	Channel 20175	Channel 20385
		1711.5 MHz	1732.5 MHz	1753.5 MHz
	RX(3M)	Channel 1965	Channel 2175	Channel 2385
		2111.5 MHz	2132.5MHz	2153.5 MHz
	TX(5M)	Channel 19975	Channel 20175	Channel 20375
		1712.5 MHz	1732.5 MHz	1752.5 MHz
	RX(5M)	Channel 1975	Channel 2175	Channel 2375
		2112.5 MHz	2132.5MHz	2152.5 MHz
	TX(10M)	Channel 20000	Channel 20175	Channel 20350
		1715 MHz	1732.5 MHz	1750 MHz
	RX(10M)	Channel 2000	Channel 2175	Channel 2350
		2115 MHz	2132.5MHz	2150 MHz
	TX(15M)	Channel 20025	Channel 20175	Channel 20325
		1717.5 MHz	1732.5 MHz	1747.5 MHz
	RX(15M)	Channel 2025	Channel 2175	Channel 2325



Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
		2117.5 MHz	2132.5MHz	2147.5 MHz
	TX(20M)	Channel 20050	Channel 20175	Channel 20300
		1720 MHz	1732.5 MHz	1745 MHz
	RX(20M)	Channel 2050	Channel 2175	Channel 2300
		2120 MHz	2132.5MHz	2145 MHz



Test Mode	TX / RX	RF Channel		
		Bottom (B)	Middle (M)	Top (T)
WCDMA850	TX	Channel 4132	Channel 4182	Channel 4233
		826.4 MHz	836.4 MHz	846.6 MHz
	RX	Channel 4357	Channel 4407	Channel 4458
		871.4 MHz	881.4 MHz	891.6 MHz
LTE BAND 5	TX(1.4M)	Channel 20407	Channel 20525	Channel 20643
		824.7 MHz	836.5 MHz	848.3 MHz
	RX(1.4M)	Channel 2407	Channel 2525	Channel 2643
		869.7 MHz	881.5 MHz	893.3 MHz
	TX(3M)	Channel 20415	Channel 20525	Channel 20635
		825.5 MHz	836.5 MHz	847.5 MHz
	RX(3M)	Channel 2415	Channel 2525	Channel 2635
		870.5 MHz	881.5 MHz	892.5 MHz
	TX(5M)	Channel 20425	Channel 20525	Channel 20625
		826.5 MHz	836.5 MHz	846.5 MHz
	RX(5M)	Channel 2425	Channel 2525	Channel 2625
		871.5 MHz	881.5 MHz	891.5 MHz
	TX(10M)	Channel 20450	Channel 20525	Channel 20600
		829 MHz	836.5 MHz	844 MHz
	RX(10M)	Channel 2450	Channel 2525	Channel 2600
		874 MHz	881.5 MHz	889 MHz

Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 7	TX (5M)	Channel 20775	Channel 21100	Channel 21425
		2502.5 MHz	2535 MHz	2567.5 MHz
	TX (10M)	Channel 20800	Channel 21100	Channel 21400
		2505 MHz	2535 MHz	2565 MHz
	TX (15M)	Channel 20825	Channel 21100	Channel 21375
		2507.5 MHz	2535 MHz	2562.5 MHz
	TX (20M)	Channel 20850	Channel 21100	Channel 21350
		2510 MHz	2535 MHz	2560 MHz
	RX (5M)	Channel 2775	Channel 3100	Channel 3425
		2622.5 MHz	2655 MHz	2687.5 MHz
	RX (10M)	Channel 2800	Channel 3100	Channel 3400
		2625 MHz	2655 MHz	2685 MHz
	RX (15M)	Channel 2825	Channel 3100	Channel 3375
		2627.5 MHz	2655 MHz	2682.5 MHz
	RX (20M)	Channel 2850	Channel 3100	Channel 3350
		2630 MHz	2655 MHz	2680 MHz



Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 12	TX (1.4M)	Channel 23017	Channel 23095	Channel 23173
		699.7 MHz	707.5 MHz	715.3 MHz
	RX (1.4M)	Channel 5017	Channel 5095	Channel 5173
		729.7 MHz	737.5 MHz	745.3 MHz
	TX (3M)	Channel 23025	Channel 23095	Channel 23165
		700.5 MHz	707.5 MHz	714.5 MHz
	RX (3M)	Channel 5025	Channel 5095	Channel 5165
		730.5 MHz	737.5 MHz	744.5 MHz
	TX (5M)	Channel 23035	Channel 23095	Channel 23155
		701.5 MHz	707.5 MHz	713.5 MHz
	RX (5M)	Channel 5035	Channel 5095	Channel 5155
		731.5 MHz	737.5 MHz	743.5 MHz
	TX (10M)	Channel 23060	Channel 23095	Channel 23130
		704 MHz	707.5 MHz	711 MHz
	RX (10M)	Channel 5060	Channel 5095	Channel 5130
		734 MHz	737.5 MHz	741 MHz



Test Mode	TX / RX	RF Channel		
		Low (B)	Middle (M)	High (T)
LTE Band 13	TX (5M)	Channel 23205	Channel 23230	Channel 23255
		779.5 MHz	782 MHz	784.5 MHz
	RX (5M)	Channel 5205	Channel 5230	Channel 5255
		748.5 MHz	751 MHz	753.5 MHz
	TX (10M)	Channel 23230	Channel 23230	Channel 23230
		782 MHz	782 MHz	782 MHz
	RX (10M)	Channel 5230	Channel 5230	Channel 5230
		751 MHz	751 MHz	751 MHz

Test Mode	TX / RX	RF Channel		
		Low (L)	Middle (M)	High (H)
LTE Band 17	TX (5M)	Channel 23755	Channel 23790	Channel 23780
		706.5 MHz	710 MHz	709 MHz
	RX (5M)	Channel 5755	Channel 5790	Channel 5780
		736.5 MHz	740 MHz	739 MHz
	TX (10M)	Channel 23825	Channel 23790	Channel 23800
		713.5 MHz	710 MHz	711 MHz
	RX (10M)	Channel 5825	Channel 5790	Channel 5800
		743.5 MHz	740 MHz	741 MHz

## 4.4 DESCRIPTION OF TESTS

### 4.4.1 Radiated Power and Radiated Spurious Emissions

Radiated spurious emissions are investigated indoors in a semi-anechoic chamber to determine the frequencies producing the worst case emissions. Final measurements for radiated power and radiated spurious emissions are performed on the 3 meter OATS per the guidelines of ANSI/TIA-603-C-2004. The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Emissions are also investigated with the receive antenna horizontally and vertically polarized.

A portable or small unlicensed wireless device shall be placed on a non-metallic test fixture or other non-metallic support during testing. The supporting fixture shall permit orientation of the EUT in each of three orthogonal (x, y, z) axis positions such that emissions from the EUT are maximized. Measure the EUT maximum RF power and record the result.

A half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where,  $P_d$  is the dipole equivalent power,  $P_g$  is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to  $P_g \text{ [dBm]} - \text{cable loss [dB]}$ .

The calculated  $P_d$  levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power [Watts]})$ .

Note: Reference test setup 3

#### 4.4.2 Occupied Bandwidth

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

Note: Reference test setup 1.

#### 4.4.3 Spurious and Harmonic Emissions at Antenna Terminal

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Note: Reference test setup 1.

#### 4.4.4 Peak-Average Ratio

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

Note: Reference test setup 1.

#### 4.4.5 Frequency Stability / Temperature Variation

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

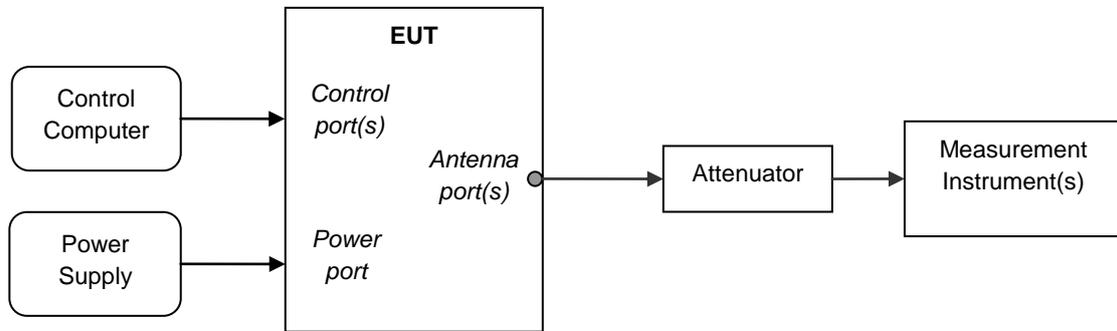
**Time Period and Procedure:**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

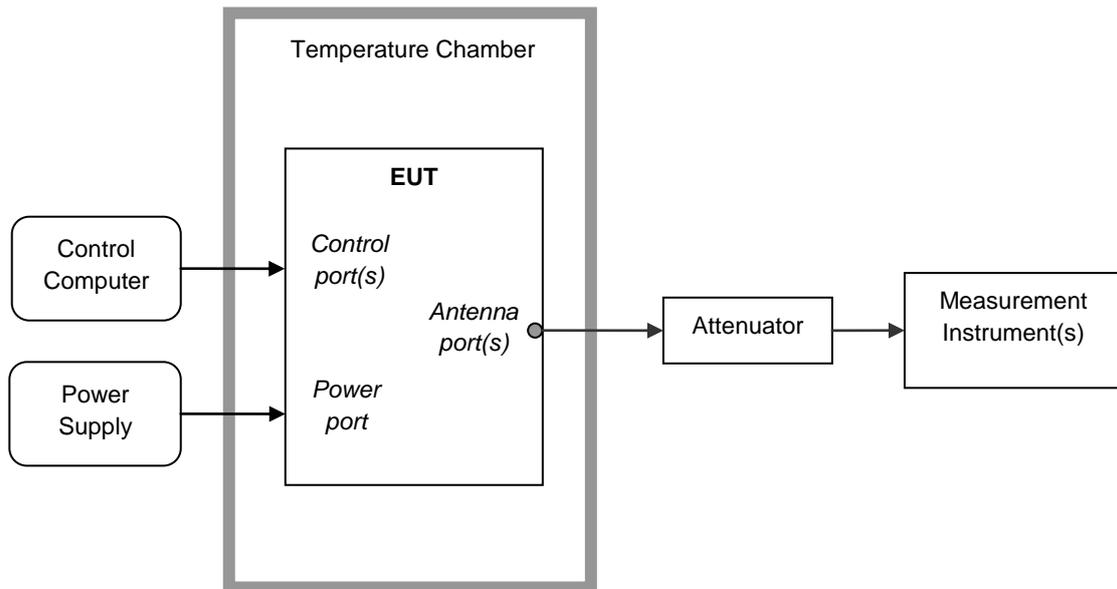
Note: Reference test setup 2.

## 4.5 Test Setups

### 4.5.1 Test Setup 1



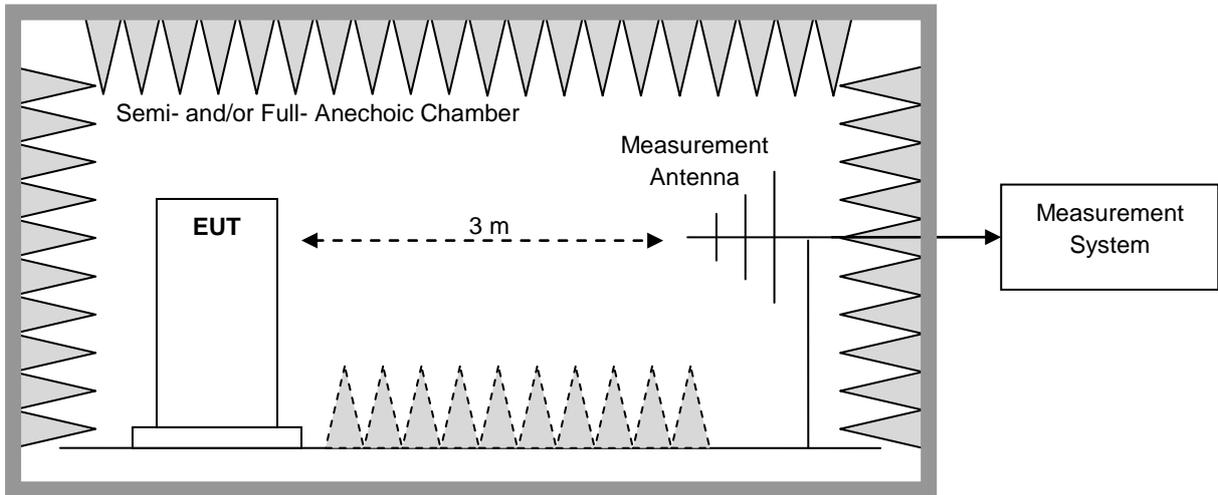
### 4.5.2 Test Setup 2



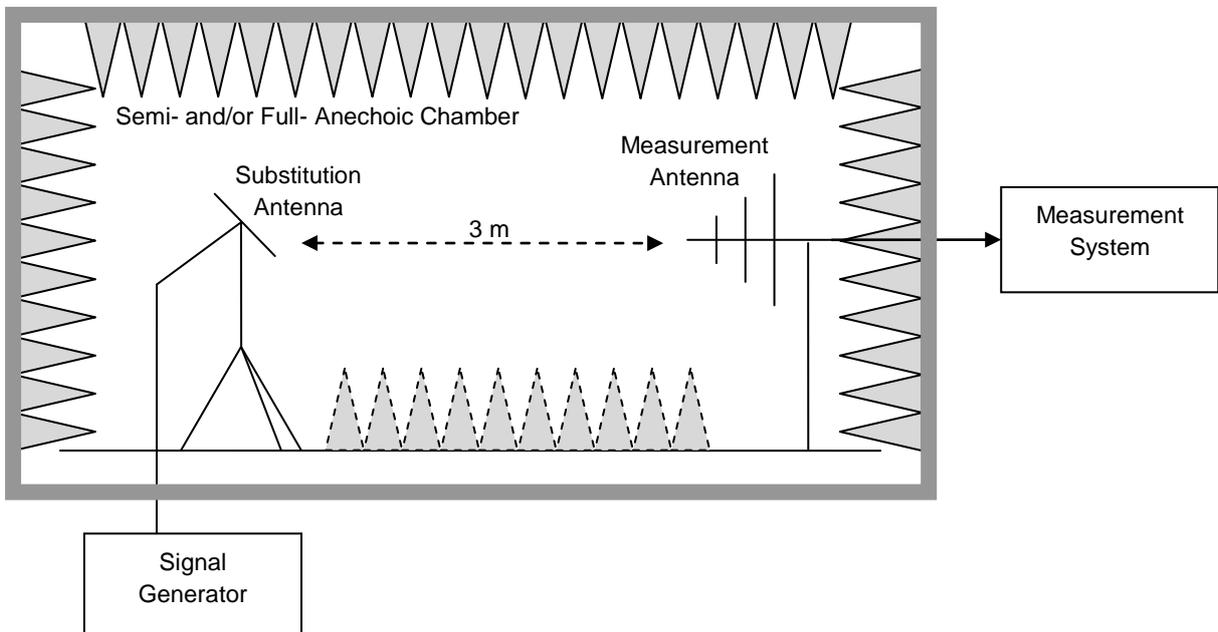
### 4.5.3 Test Setup 3

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

#### 4.5.3.1 Step 1: Pre-test



#### 4.5.3.2 Step 2: Substitution method to verify the maximum ERP



### 4.6 Test Conditions

Test Case		Test Conditions	
Transmit Output Power Data	Average Power, Total	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
		Test Mode	UMTS/TM1,LTE/TM1,LTE/TM2
	Average Power, Spectral Density (if required)	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
		Test Mode	UMTS/TM1,LTE/TM1,LTE/TM2
Peak-to-Average Ratio (if required)		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
		Test Mode	UMTS/TM1,LTE/TM1,LTE/TM2
Modulation Characteristics		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	M (L= low channel, M= middle channel, H= high channel )
		Test Mode	UMTS/TM1,LTE/TM1,LTE/TM2
Bandwidth	Occupied Bandwidth	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
		Test Mode	UMTS/TM1,LTE/TM1,LTE/TM2
	Emission Bandwidth (if required)	Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
		Test Mode	UMTS/TM1,LTE/TM1,LTE/TM2
Band Edges Compliance		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, H (L= low channel, M= middle channel, H= high channel )
		Test Mode	UMTS/TM1,LTE/TM1,LTE/TM2
Spurious Emission at Antenna Terminals		Test Env.	Ambient Climate & Rated Voltage
		Test Setup	Test Seup 1
		RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )



Test Case	Test Conditions	
	Test Mode	GSM/TM1,GSM/TM2,UMTS/TM1,LTE/TM1,LTE/TM2
Field Strength of Spurious Radiation	Test Env.	Ambient Climate & Rated Voltage
	Test Setup	Test Seup 3
	Test Mode	UMTS/TM1/TM2/TM3,LTE/TM1,LTE/TM2 NOTE: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected.
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
Frequency Stability	Test Env.	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage; (2) VL, VN and VH of Rated Voltage at Ambient Climate.
	Test Setup	Test Seup 2
	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )
	Test Mode	UMTS/TM1,LTE/TM1,LTE/TM2

**5 Main Test Instruments**

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	1288003	2012-11-19	2014-11-18
Wireless Communication Test set	Agilent	N4010A	MY49081592	2013-10-29	2014-10-28
Universal Radio Communication Tester	R&S	CMU200	113164	2013-07-18	2014-07-17
Universal Radio Communication Tester	R & S	CMW500	126855	2013-08-08	2015-08-09
Spectrum Analyzer	Agilent	E4440A	MY48250119	2013-08-09	2014-08-08
Signal Analyzer	R&S	FSQ31	200021	2013-10-29	2014-10-28
Spectrum Analyzer	Agilent	N9030A	MY49431698	2013-10-29	2014-10-28
Temperature Chamber	WEISS	WKL64	56246002940010	2014-02-25	2015-02-24
Temperature Chamber	ESPEC	MW3030	06114003	2013-05-14	2014-05-13
Signal generator	Agilent	E8257D	MY51500314	2013-04-15	2014-04-14
Vector Signal Generator	R&S	SMU200A	104162	2013-10-29	2014-10-28
Test receiver	R&S	ESU26	100150	2013-05-15	2014-05-14
Spectrum analyzer	R&S	FSU3	200474	2013-12-24	2014-12-23
Spectrum analyzer	R&S	FSU43	100144	2013-12-24	2014-12-23
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2013-02-02	2015-02-01
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-490	2013-02-02	2015-02-01
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2013-03-23	2015-03-22
Pyramidal Horn Antenna(18GHz-26-5GHz)	ETS-LINDGREN	3160-09	5140299	2013-03-05	2015-03-04
Artificial Mains Network	R&S	ENV4200	100134	2013-12-24	2014-12-23
Artificial Mains Network	R&S	ENV216	100382	2013-12-24	2014-12-23



## 6 Measurement Uncertainty

For a 95% confidence level ( $k = 2$ ), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Test Item		Extended Uncertainty
Transmit Output Power Data	Power [dBm]	U = 0.39 dB
Bandwidth	Magnitude [%]	U = 0.2%
Band Edge Compliance	Disturbance Power [dBm]	U = 2.0 dB
Spurious Emissions, Conducted	Disturbance Power [dBm]	U = 2.0 dB
Field Strength of Spurious Radiation	ERP [dBm]	For 3 m Chamber: U = 4.6 dB (30 MHz to 1GHz) U = 3.0 dB (above 1 GHz) For 10 m Chamber: U = 4.6 dB (30 MHz to 1GHz) U = 3.0 dB (above 1 GHz)
Frequency Stability	Frequency Accuracy [ppm]	U = 0.21 ppm

END