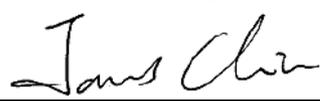
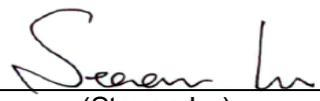


FCC Test Report

FCC ID: QISBGO-L03

Project No. : 1608C212
Equipment : HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)
Model Name : BGO-L03
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt : Aug. 26, 2016
Date of Test : Aug. 26, 2016 ~ Sep. 05, 2016
Issued Date : Sep. 06, 2016
Tested by : BTL Inc.

Testing Engineer : 
(Bill Zhang)
Technical Manager : 
(James Chiu)
Authorized Signatory : 
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 MEASUREMENT INSTRUMENTS LIST	12
4.1.3 TEST PROCEDURE	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	13
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	41
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	41
4.2.2 MEASUREMENT INSTRUMENTS LIST	42
4.2.3 TEST PROCEDURE	43
4.2.4 DEVIATION FROM TEST STANDARD	43
4.2.5 TEST SETUP	44
4.2.6 EUT OPERATING CONDITIONS	44
4.2.7 TEST RESULTS-BELOW 1GHZ	45
4.2.8 TEST RESULTS-ABOVE 1GHZ	72

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1608C212	Original Issue.	Sep. 06, 2016

1. CERIFICATION

Equipment : HUawei MediaPad T2 7.0 (MediaPad T2 7.0 for short)
Brand Name : HUawei
Model Name : BGO-L03
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Date of Test : Aug. 26, 2016 ~ Sep. 05, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1608C212) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is below 108 MHz, so the test will not be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)
Brand Name	HUAWEI
Test Model Name	BGO-L03
Model Difference	N/A
Frequency	GSM 850/1900 WCDMA B2/4/5 LTE B2/4/5/7/17 BT 4.0 Wi-Fi: 802.11b/g/n
Power Source	#1 DC voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) Dongguan Phitek Electronics Co., Ltd Model: HW-050100U01 (US), HW-050100A01 (AU) HW-050100E01 (EU), HW-050100B01 (UK) #2 Supplied from battery.
Power Rating	#1 I/P: 100-240V~50/60Hz, 0.2A #2 DC 3.7V 4000mAh
HW Version	SH1BAGO721LM
SW Version	BGO-L03C331B002

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- | Item | Mfr/Brand | Model. |
|-----------|--|---------------------|
| Battery | Harbin Coslight Power Co., Ltd. | HB3G1 |
| | Sunwoda Electronic Co., LTD | |
| USB Cable | HONGLIN TECHNOLOGY CO., LTD | 130-26988 |
| | FOXCONN INTERCONNECT CO., LTD | CUBB01M-HC304-DH |
| | Shenzhen Luxshare Precision Industry Co., Ltd | L99U2017-CS-H |
| Earphone | GoerTek Inc | HA1-3, HG-04A |
| | Jiangxi Lianchuang Hongsheng Electronic Co., LTD | MEMD1632B580C00 |
| | BOLUO COUNTY QUANCHENG ELECTRONIC | 1311-3291-3.5mm-229 |

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	USB copy(EUT with PC)+idle
Mode 2	Adapter+WIFI+BT+GPS+Camera On
Mode 3	Adapter+playing+speaker
Mode 4	Adapter+playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)

For Conducted Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+idle
Mode 2	Adapter+WIFI+BT+GPS+Camera On
Mode 3	Adapter+playing+speaker
Mode 4	Adapter+playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+idle
Mode 2	Adapter+WIFI+BT+GPS+Camera On
Mode 3	Adapter+playing+speaker
Mode 4	Adapter+playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Mode 1

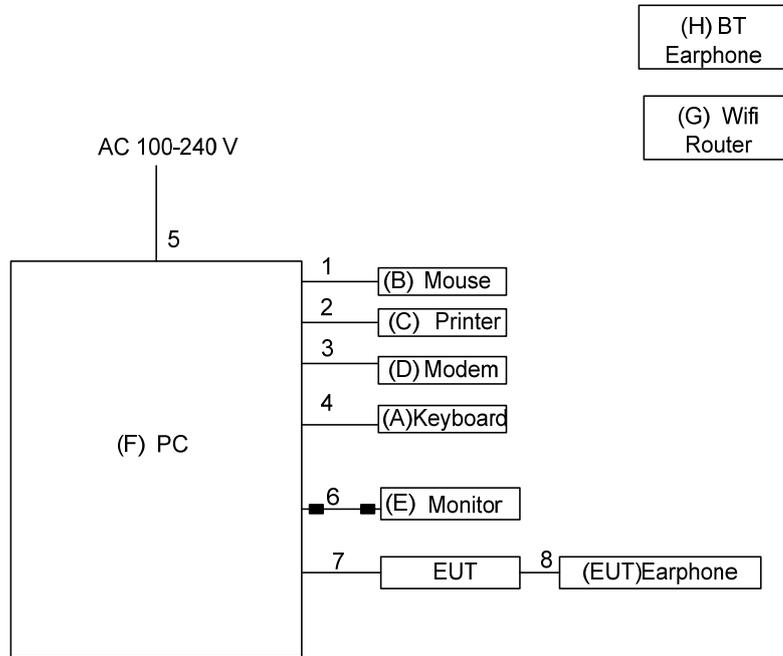

■ Ferrite core

Ground plane
Remote System

Mode 2~7

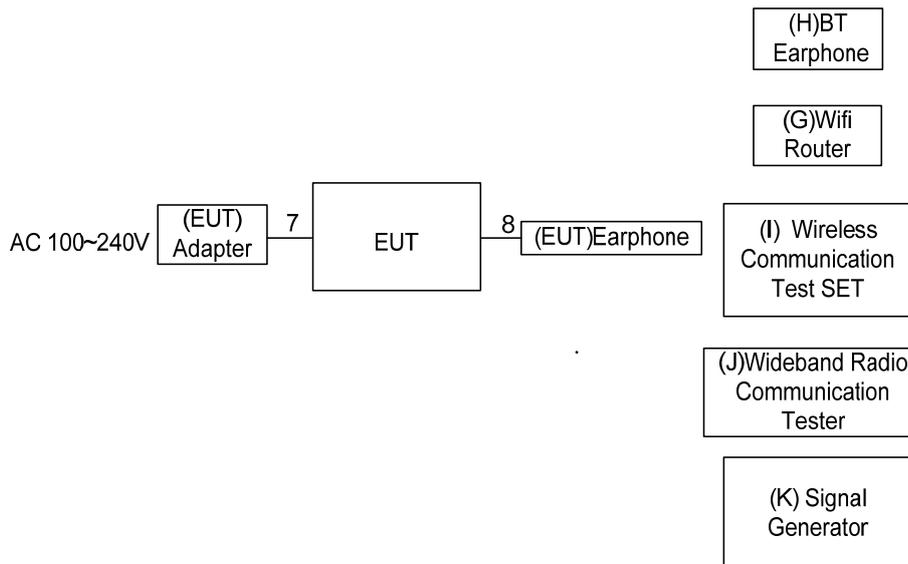

Ground plane
Remote System

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T0 8NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG -1WNS
F	PC	Dell	745	DOC	G7K832X
G	wireless router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
H	BT earphone	N/A	N/A	N/A	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	MY48364183
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125
K	Signal Generator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Audio Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

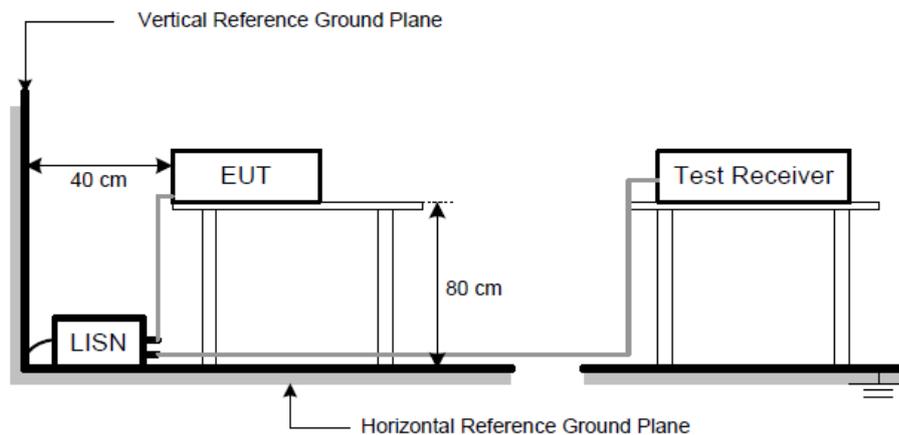

4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.7 TEST RESULTS

Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz, SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform.In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+idle		
Note	USB cable:FOXCONN		
Test Engineer	Lucky Mao		

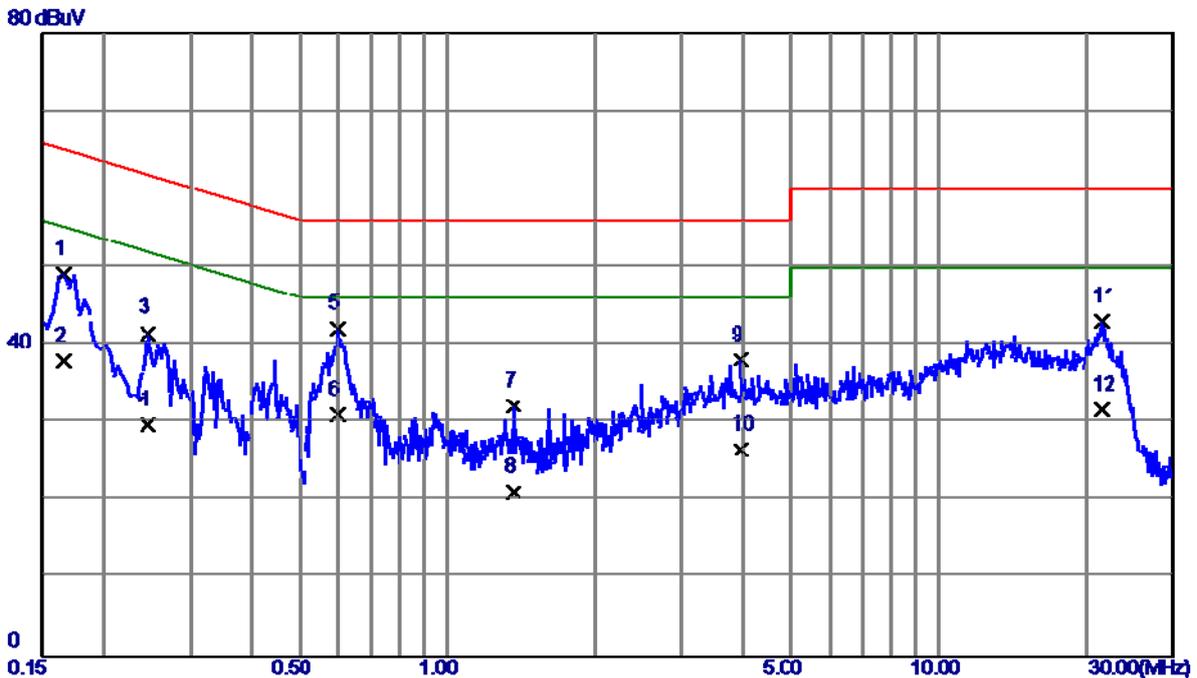


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	39.65	9.52	49.17	65.16	-15.99	QP
2	0.1660	28.34	9.52	37.86	55.16	-17.30	AVG
3	0.2460	31.99	9.53	41.52	61.89	-20.37	QP
4	0.2460	20.25	9.53	29.78	51.89	-22.11	AVG
5 *	0.5980	32.38	9.64	42.02	56.00	-13.98	QP
6	0.5980	21.34	9.64	30.98	46.00	-15.02	AVG
7	1.3660	22.29	9.83	32.12	56.00	-23.88	QP
8	1.3660	11.28	9.83	21.11	46.00	-24.89	AVG
9	3.9700	27.96	10.19	38.15	56.00	-17.85	QP
10	3.9700	16.34	10.19	26.53	46.00	-19.47	AVG
11	21.3980	32.71	10.40	43.11	60.00	-16.89	QP
12	21.3980	21.25	10.40	31.65	50.00	-18.35	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+idle		
Note	USB cable:FOXCONN		
Test Engineer	Lucky Mao		

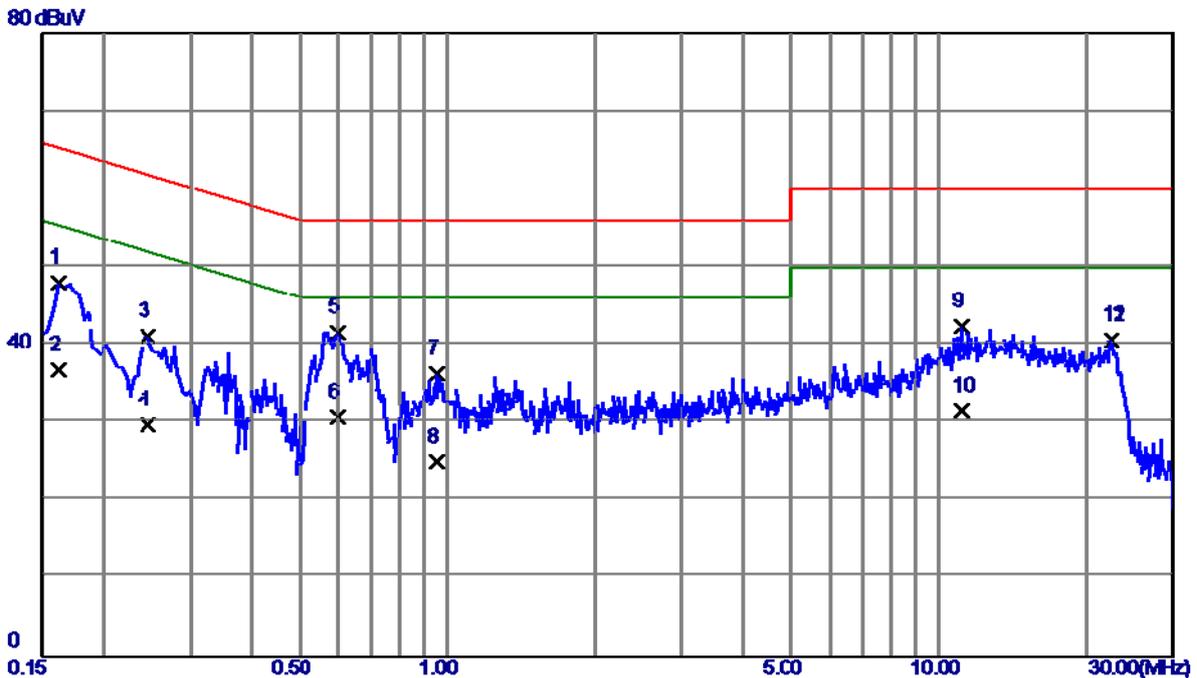


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	38.54	9.46	48.00	65.36	-17.36	QP
2	0.1620	27.34	9.46	36.80	55.36	-18.56	AVG
3	0.2460	31.58	9.53	41.11	61.89	-20.78	QP
4	0.2460	20.25	9.53	29.78	51.89	-22.11	AVG
5	0.5980	32.22	9.44	41.66	56.00	-14.34	QP
6	0.5980	21.34	9.44	30.78	46.00	-15.22	AVG
7	0.9540	26.59	9.66	36.25	56.00	-19.75	QP
8	0.9540	15.25	9.66	24.91	46.00	-21.09	AVG
9	11.1780	32.03	10.32	42.35	60.00	-17.65	QP
10	11.1780	21.25	10.32	31.57	50.00	-18.43	AVG
11	22.5380	30.15	10.52	40.67	60.00	-19.33	QP
12 *	22.5380	30.15	10.52	40.67	50.00	-9.33	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+idle		
Note	USB cable:HONGLIN		
Test Engineer	Lucky Mao		

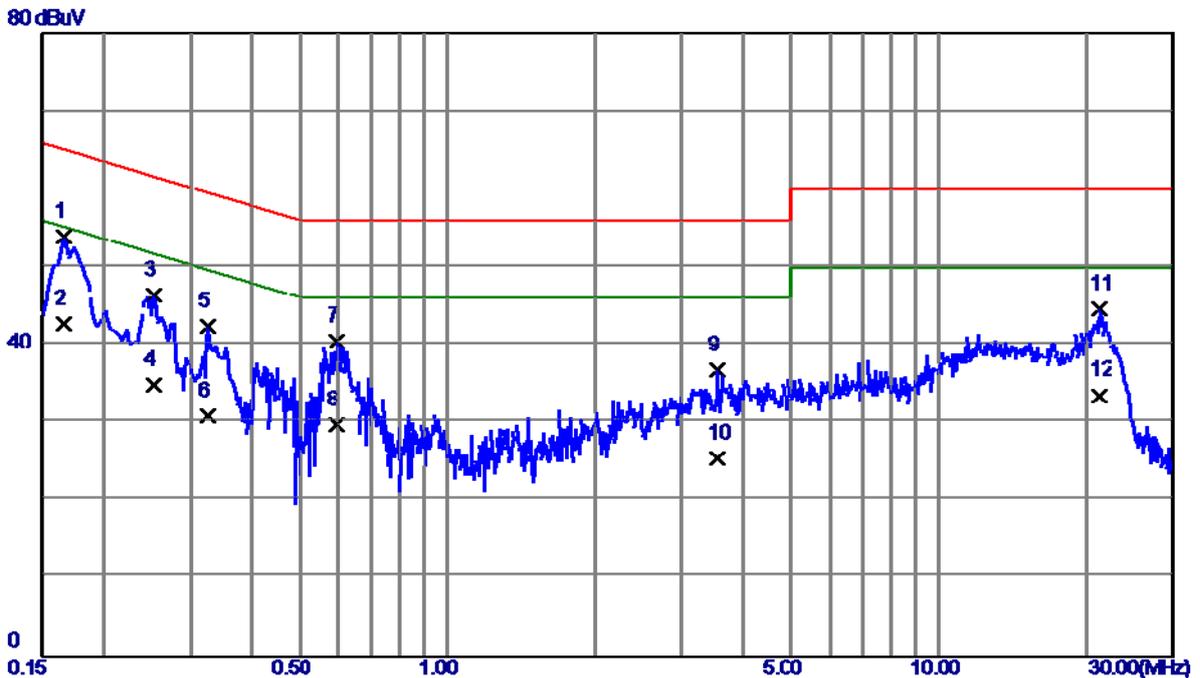


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1660	44.43	9.52	53.95	65.16	-11.21	QP
2	0.1660	33.25	9.52	42.77	55.16	-12.39	AVG
3	0.2540	36.93	9.53	46.46	61.63	-15.17	QP
4	0.2540	25.34	9.53	34.87	51.63	-16.76	AVG
5	0.3260	32.91	9.53	42.44	59.55	-17.11	QP
6	0.3260	21.34	9.53	30.87	49.55	-18.68	AVG
7	0.5940	30.81	9.64	40.45	56.00	-15.55	QP
8	0.5940	20.15	9.64	29.79	46.00	-16.21	AVG
9	3.5420	26.72	10.14	36.86	56.00	-19.14	QP
10	3.5420	15.36	10.14	25.50	46.00	-20.50	AVG
11	21.2540	34.31	10.40	44.71	60.00	-15.29	QP
12	21.2540	23.12	10.40	33.52	50.00	-16.48	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+idle		
Note	USB cable:HONGLIN		
Test Engineer	Lucky Mao		

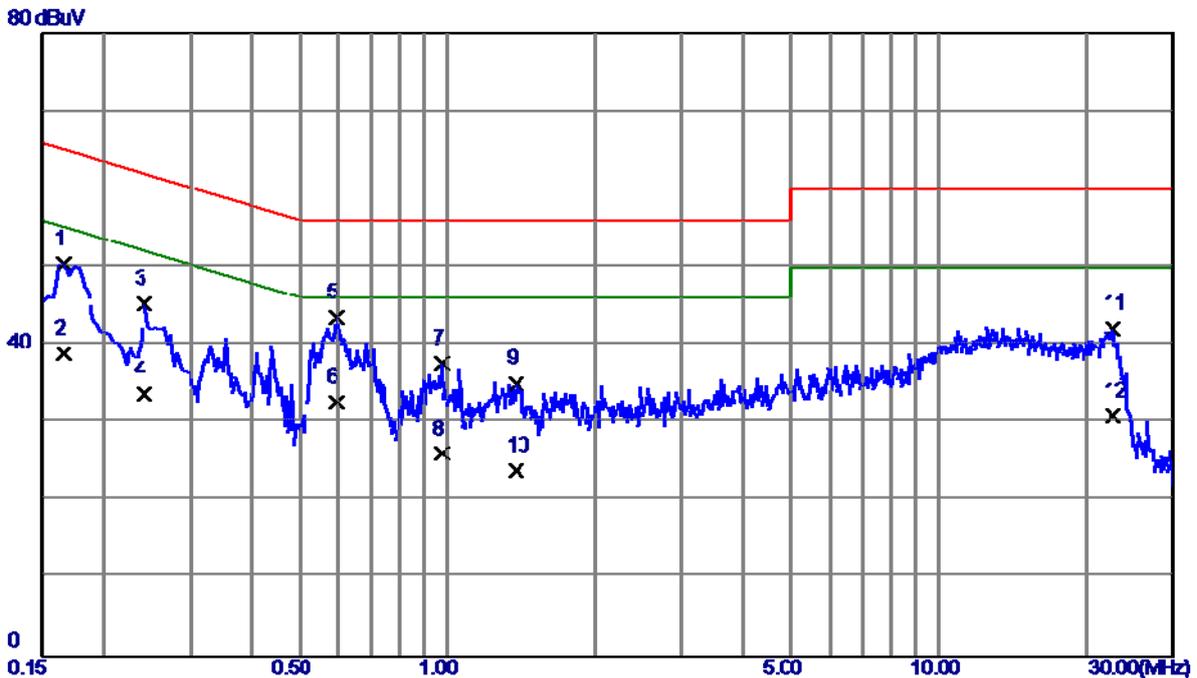


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	40.97	9.44	50.41	65.16	-14.75	QP
2	0.1660	29.38	9.44	38.82	55.16	-16.34	AVG
3	0.2420	35.75	9.53	45.28	62.03	-16.75	QP
4	0.2420	24.15	9.53	33.68	52.03	-18.35	AVG
5 *	0.5940	34.04	9.44	43.48	56.00	-12.52	QP
6	0.5940	23.25	9.44	32.69	46.00	-13.31	AVG
7	0.9780	27.93	9.66	37.59	56.00	-18.41	QP
8	0.9780	16.34	9.66	26.00	46.00	-20.00	AVG
9	1.3779	25.42	9.67	35.09	56.00	-20.91	QP
10	1.3779	14.12	9.67	23.79	46.00	-22.21	AVG
11	22.6500	31.56	10.52	42.08	60.00	-17.92	QP
12	22.6500	20.34	10.52	30.86	50.00	-19.14	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+idle		
Note	USB cable:Luxshare		
Test Engineer	Lucky Mao		

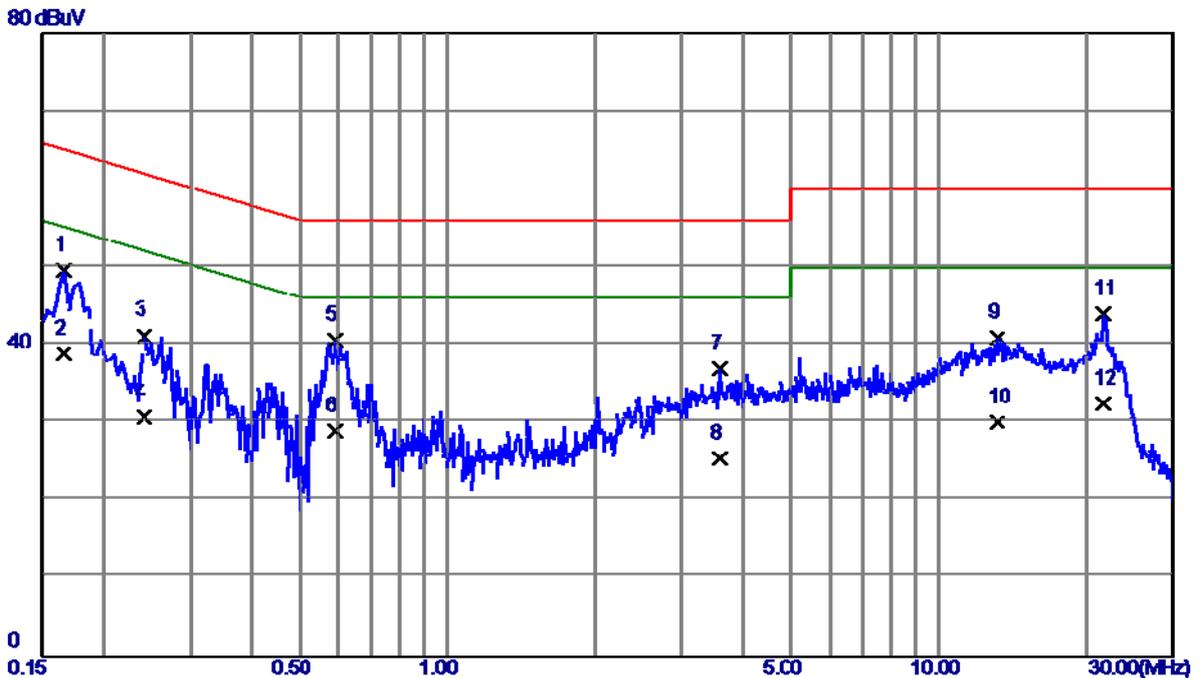


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	40.08	9.52	49.60	65.16	-15.56	QP
2	0.1660	29.38	9.52	38.90	55.16	-16.26	AVG
3	0.2420	31.67	9.53	41.20	62.03	-20.83	QP
4	0.2420	21.25	9.53	30.78	52.03	-21.25	AVG
5 *	0.5899	30.99	9.64	40.63	56.00	-15.37	QP
6	0.5899	19.38	9.64	29.02	46.00	-16.98	AVG
7	3.5780	26.87	10.15	37.02	56.00	-18.98	QP
8	3.5780	15.25	10.15	25.40	46.00	-20.60	AVG
9	13.1220	30.68	10.30	40.98	60.00	-19.02	QP
10	13.1220	19.80	10.30	30.10	50.00	-19.90	AVG
11	21.6340	33.67	10.40	44.07	60.00	-15.93	QP
12	21.6340	22.13	10.40	32.53	50.00	-17.47	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+idle		
Note	USB cable:Luxshare		
Test Engineer	Lucky Mao		

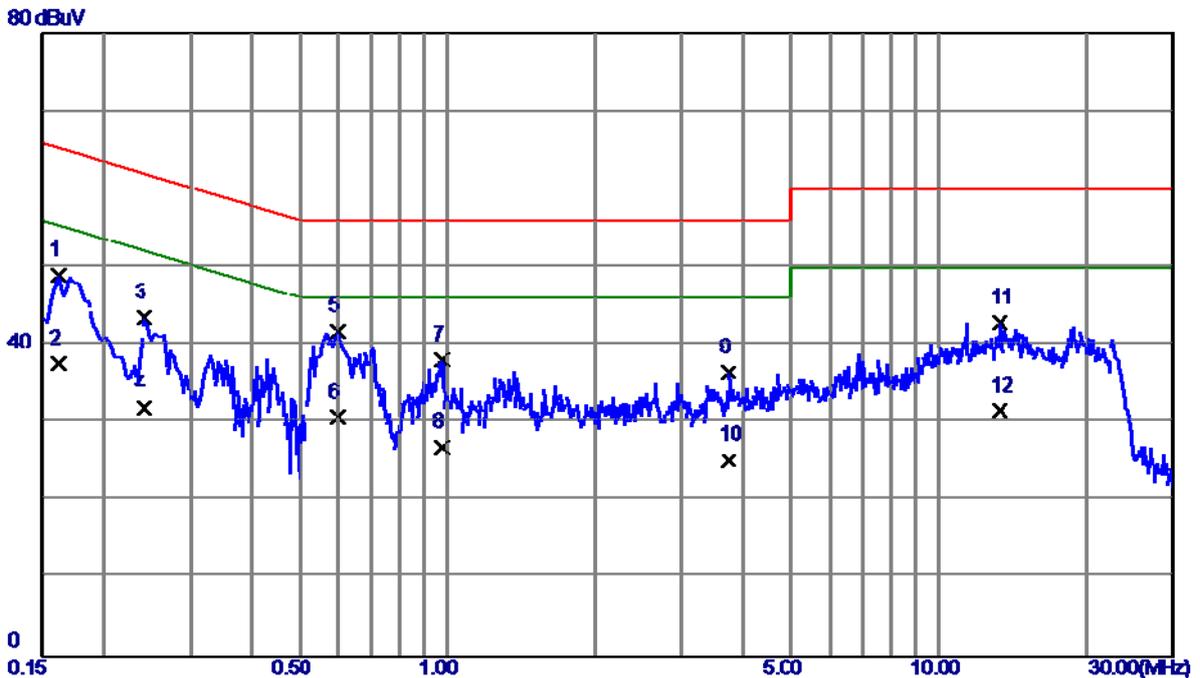


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1620	39.57	9.46	49.03	65.36	-16.33	QP
2	0.1620	28.14	9.46	37.60	55.36	-17.76	AVG
3	0.2420	33.93	9.53	43.46	62.03	-18.57	QP
4	0.2420	22.34	9.53	31.87	52.03	-20.16	AVG
5 *	0.5980	32.28	9.44	41.72	56.00	-14.28	QP
6	0.5980	21.25	9.44	30.69	46.00	-15.31	AVG
7	0.9780	28.49	9.66	38.15	56.00	-17.85	QP
8	0.9780	17.23	9.66	26.89	46.00	-19.11	AVG
9	3.7300	26.59	9.86	36.45	56.00	-19.55	QP
10	3.7300	15.34	9.86	25.20	46.00	-20.80	AVG
11	13.2860	32.47	10.34	42.81	60.00	-17.19	QP
12	13.2860	21.25	10.34	31.59	50.00	-18.41	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:BYD+USB cable:Luxshare		
Test Engineer	Lucky Mao		

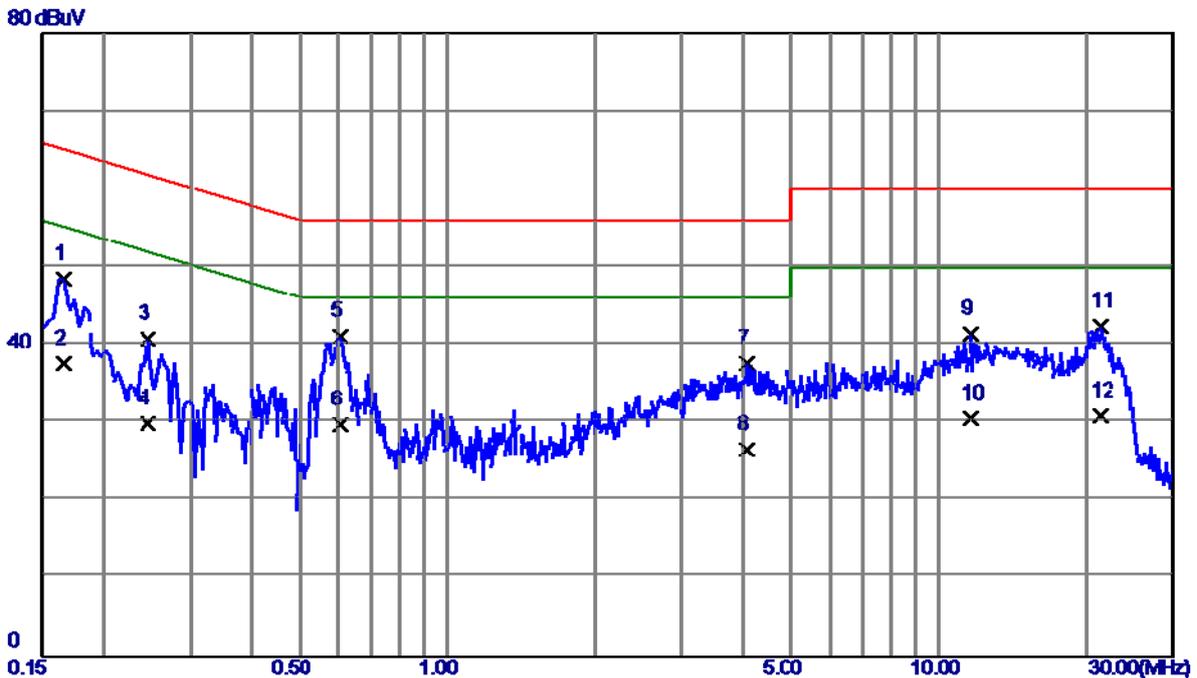


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1660	39.00	9.52	48.52	65.16	-16.64	QP
2	0.1660	28.14	9.52	37.66	55.16	-17.50	AVG
3	0.2460	31.34	9.53	40.87	61.89	-21.02	QP
4	0.2460	20.34	9.53	29.87	51.89	-22.02	AVG
5 *	0.6060	31.48	9.64	41.12	56.00	-14.88	QP
6	0.6060	20.14	9.64	29.78	46.00	-16.22	AVG
7	4.0660	27.41	10.18	37.59	56.00	-18.41	QP
8	4.0660	16.34	10.18	26.52	46.00	-19.48	AVG
9	11.6300	31.20	10.26	41.46	60.00	-18.54	QP
10	11.6300	20.30	10.26	30.56	50.00	-19.44	AVG
11	21.2900	31.95	10.40	42.35	60.00	-17.65	QP
12	21.2900	20.50	10.40	30.90	50.00	-19.10	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:BYD+USB cable:Luxshare		
Test Engineer	Lucky Mao		

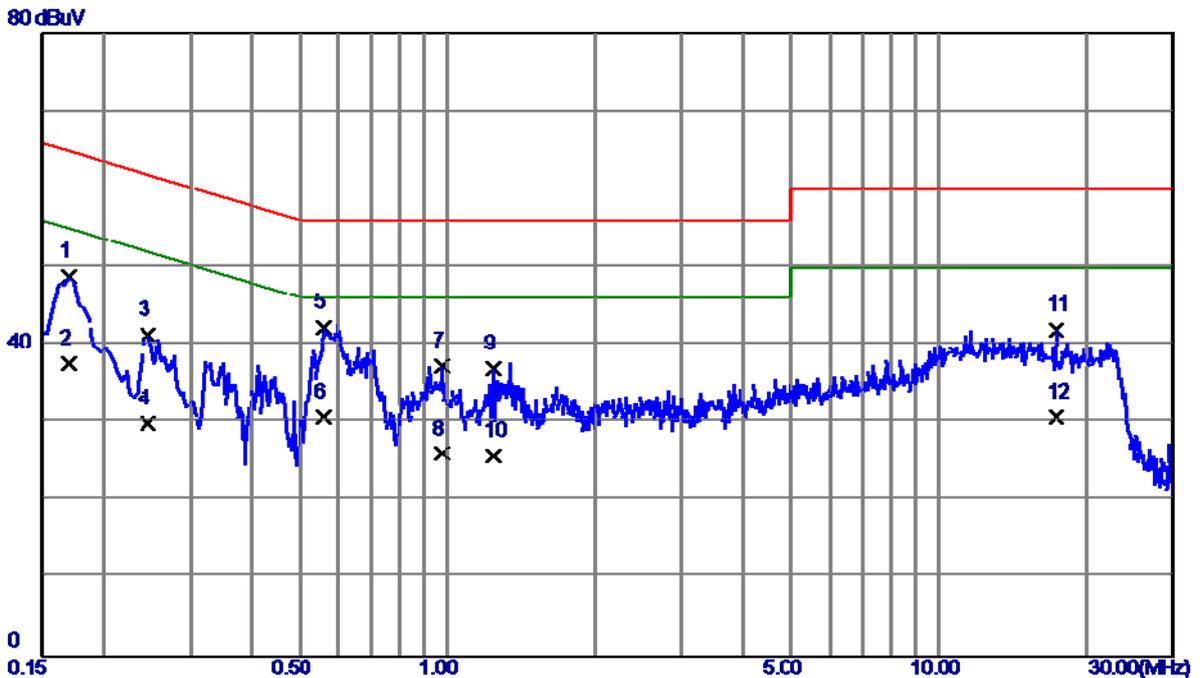


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1700	39.31	9.42	48.73	64.96	-16.23	QP
2	0.1700	28.14	9.42	37.56	54.96	-17.40	AVG
3	0.2460	31.75	9.53	41.28	61.89	-20.61	QP
4	0.2460	20.34	9.53	29.87	51.89	-22.02	AVG
5 *	0.5620	32.75	9.44	42.19	56.00	-13.81	QP
6	0.5620	21.25	9.44	30.69	46.00	-15.31	AVG
7	0.9780	27.58	9.66	37.24	56.00	-18.76	QP
8	0.9780	16.34	9.66	26.00	46.00	-20.00	AVG
9	1.2420	27.26	9.67	36.93	56.00	-19.07	QP
10	1.2420	16.14	9.67	25.81	46.00	-20.19	AVG
11	17.3340	31.42	10.43	41.85	60.00	-18.15	QP
12	17.3340	20.25	10.43	30.68	50.00	-19.32	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

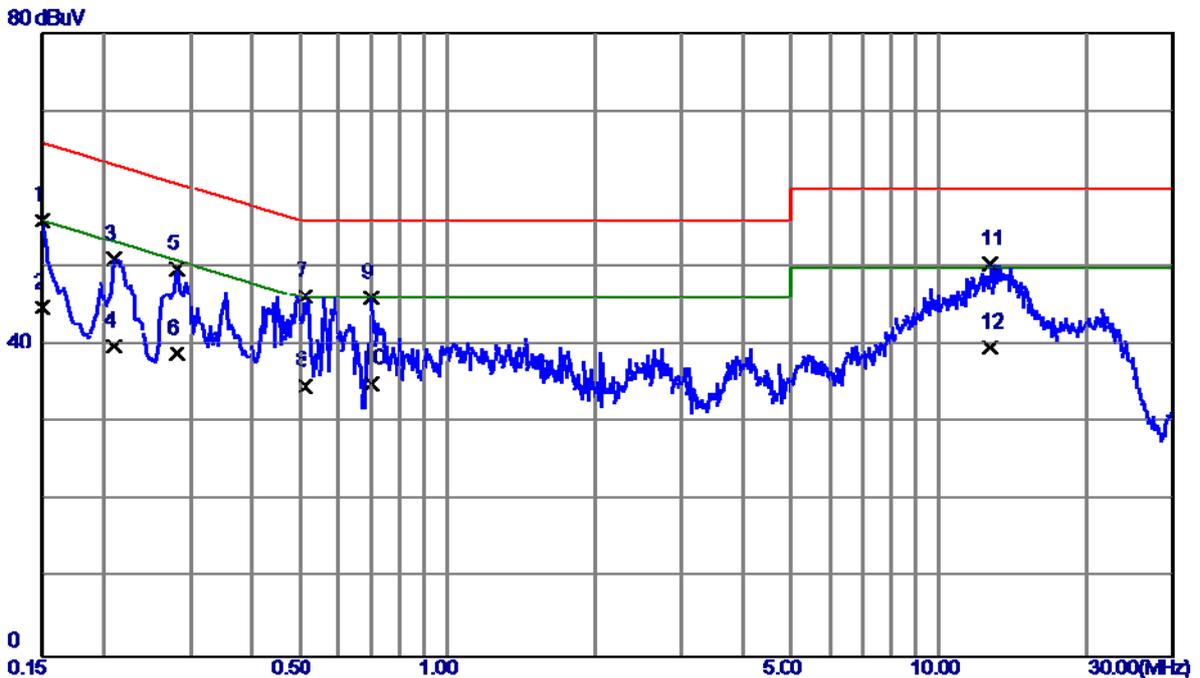


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	46.48	9.52	56.00	66.00	-10.00	QP
2	0.1500	35.25	9.52	44.77	56.00	-11.23	AVG
3	0.2100	41.56	9.53	51.09	63.21	-12.12	QP
4	0.2100	30.24	9.53	39.77	53.21	-13.44	AVG
5	0.2819	40.17	9.53	49.70	60.76	-11.06	QP
6	0.2819	29.36	9.53	38.89	50.76	-11.87	AVG
7	0.5140	36.60	9.64	46.24	56.00	-9.76	QP
8	0.5140	25.14	9.64	34.78	46.00	-11.22	AVG
9	0.7019	36.45	9.65	46.10	56.00	-9.90	QP
10	0.7019	25.32	9.65	34.97	46.00	-11.03	AVG
11 *	12.6820	40.06	10.29	50.35	60.00	-9.65	QP
12	12.6820	29.38	10.29	39.67	50.00	-10.33	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

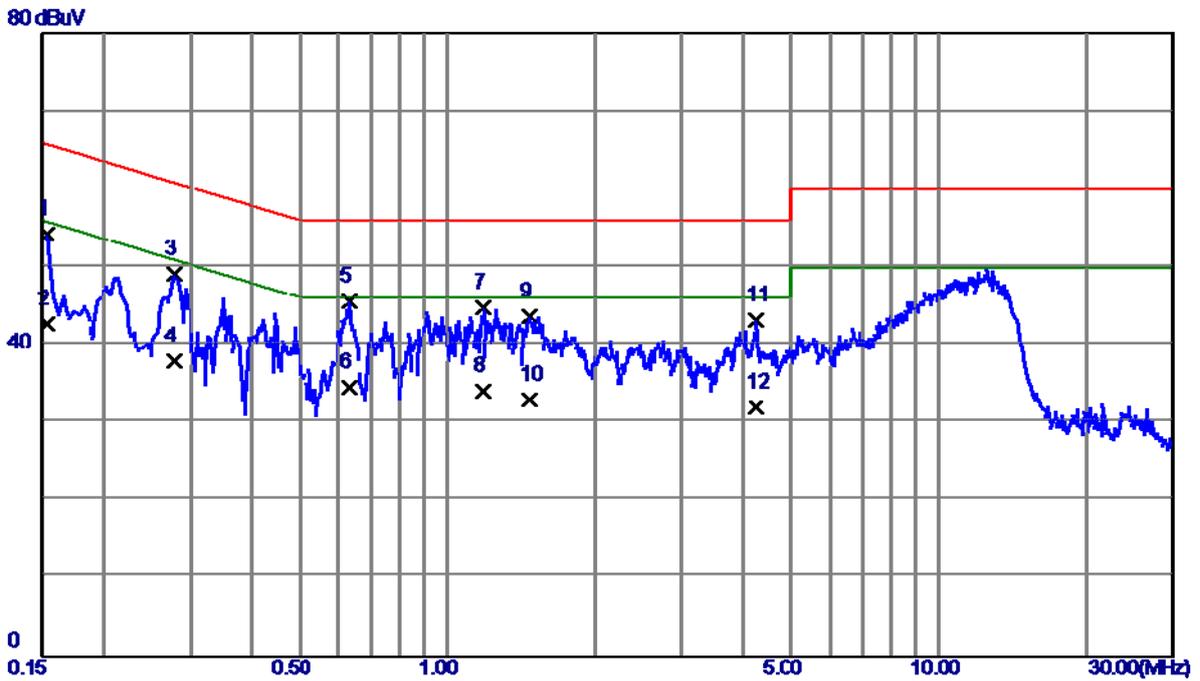


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1539	44.68	9.50	54.18	65.79	-11.61	QP
2	0.1539	33.25	9.50	42.75	55.79	-13.04	AVG
3	0.2779	39.61	9.53	49.14	60.88	-11.74	QP
4	0.2779	28.34	9.53	37.87	50.88	-13.01	AVG
5 *	0.6300	36.23	9.44	45.67	56.00	-10.33	QP
6	0.6300	25.14	9.44	34.58	46.00	-11.42	AVG
7	1.1820	35.14	9.67	44.81	56.00	-11.19	QP
8	1.1820	24.34	9.67	34.01	46.00	-11.99	AVG
9	1.4700	34.02	9.67	43.69	56.00	-12.31	QP
10	1.4700	23.25	9.67	32.92	46.00	-13.08	AVG
11	4.2500	33.36	9.91	43.27	56.00	-12.73	QP
12	4.2500	22.15	9.91	32.06	46.00	-13.94	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Phitek+USB cable:Luxshare		
Test Engineer	Lucky Mao		

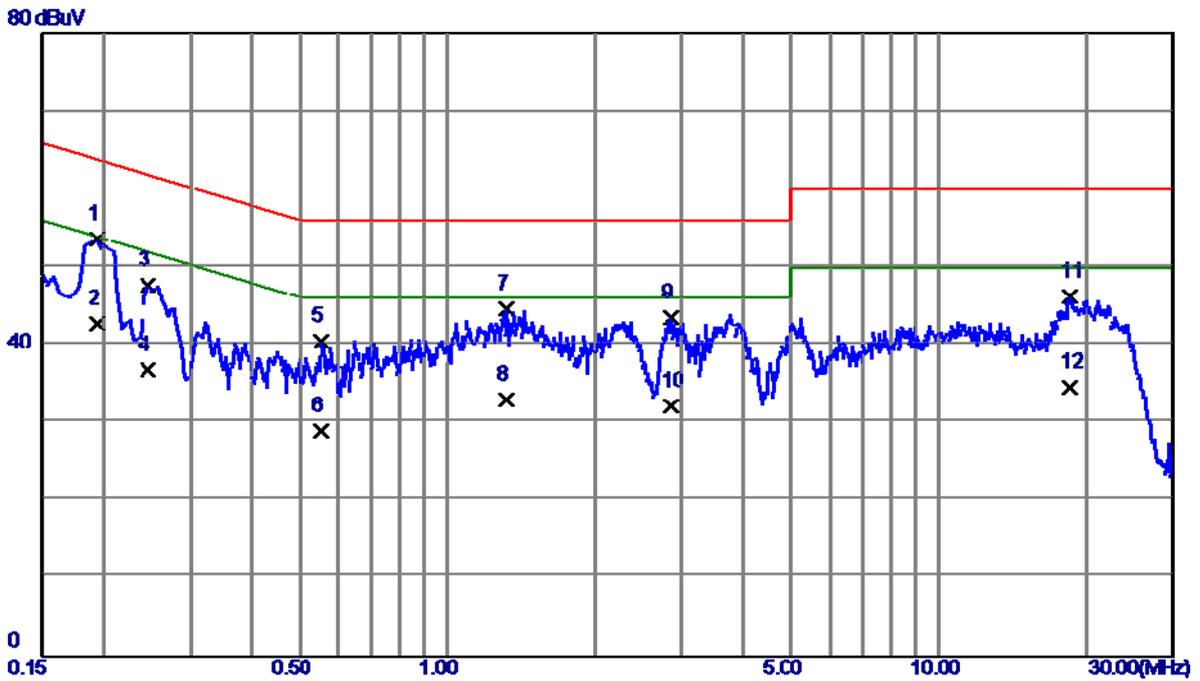


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1940	44.03	9.53	53.56	63.86	-10.30	QP
2	0.1940	33.25	9.53	42.78	53.86	-11.08	AVG
3	0.2460	38.20	9.53	47.73	61.89	-14.16	QP
4	0.2460	27.34	9.53	36.87	51.89	-15.02	AVG
5	0.5540	30.79	9.64	40.43	56.00	-15.57	QP
6	0.5540	19.25	9.64	28.89	46.00	-17.11	AVG
7	1.3180	34.90	9.81	44.71	56.00	-11.29	QP
8	1.3180	23.14	9.81	32.95	46.00	-13.05	AVG
9	2.8540	33.44	10.09	43.53	56.00	-12.47	QP
10	2.8540	22.14	10.09	32.23	46.00	-13.77	AVG
11	18.5500	35.82	10.39	46.21	60.00	-13.79	QP
12	18.5500	24.12	10.39	34.51	50.00	-15.49	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	Adapter:Phitek+USB cable:Luxshare		
Test Engineer	Lucky Mao		

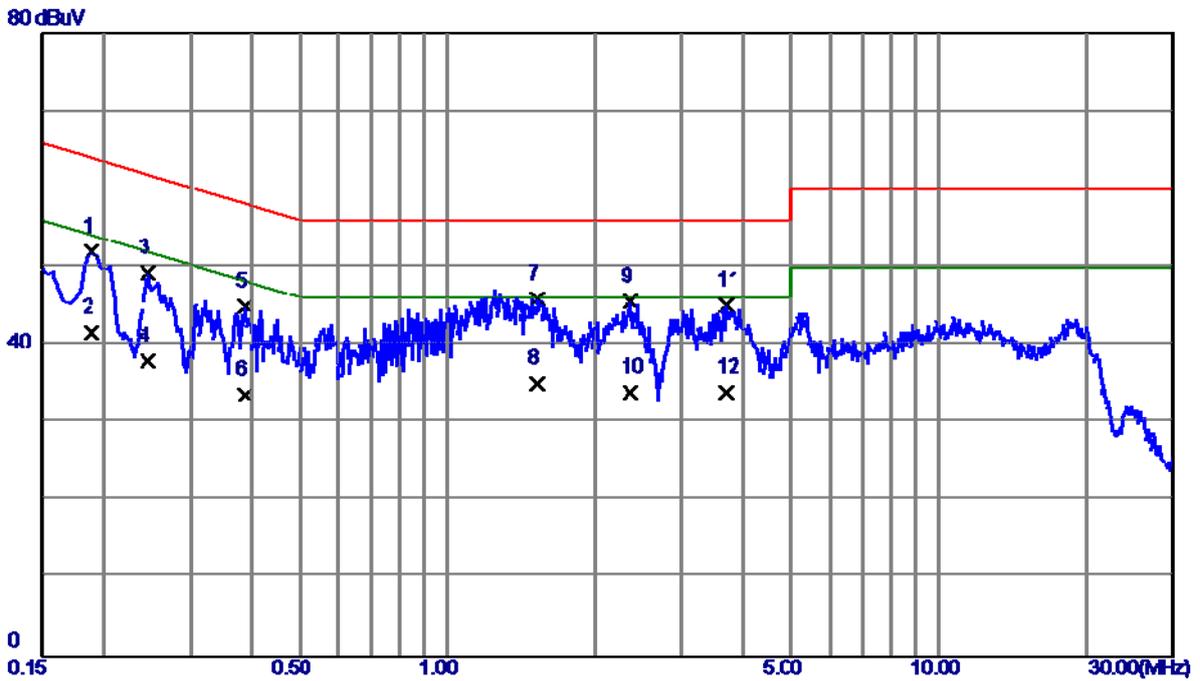


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1884	42.46	9.49	51.95	64.11	-12.16	QP
2	0.1884	32.14	9.49	41.63	54.11	-12.48	AVG
3	0.2460	39.69	9.53	49.22	61.89	-12.67	QP
4	0.2460	28.34	9.53	37.87	51.89	-14.02	AVG
5	0.3860	35.43	9.46	44.89	58.15	-13.26	QP
6	0.3860	24.16	9.46	33.62	48.15	-14.53	AVG
7 *	1.5300	36.28	9.68	45.96	56.00	-10.04	QP
8	1.5300	25.34	9.68	35.02	46.00	-10.98	AVG
9	2.3620	35.81	9.76	45.57	56.00	-10.43	QP
10	2.3620	24.23	9.76	33.99	46.00	-12.01	AVG
11	3.6900	35.24	9.86	45.10	56.00	-10.90	QP
12	3.6900	24.12	9.86	33.98	46.00	-12.02	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+playing+speaker		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

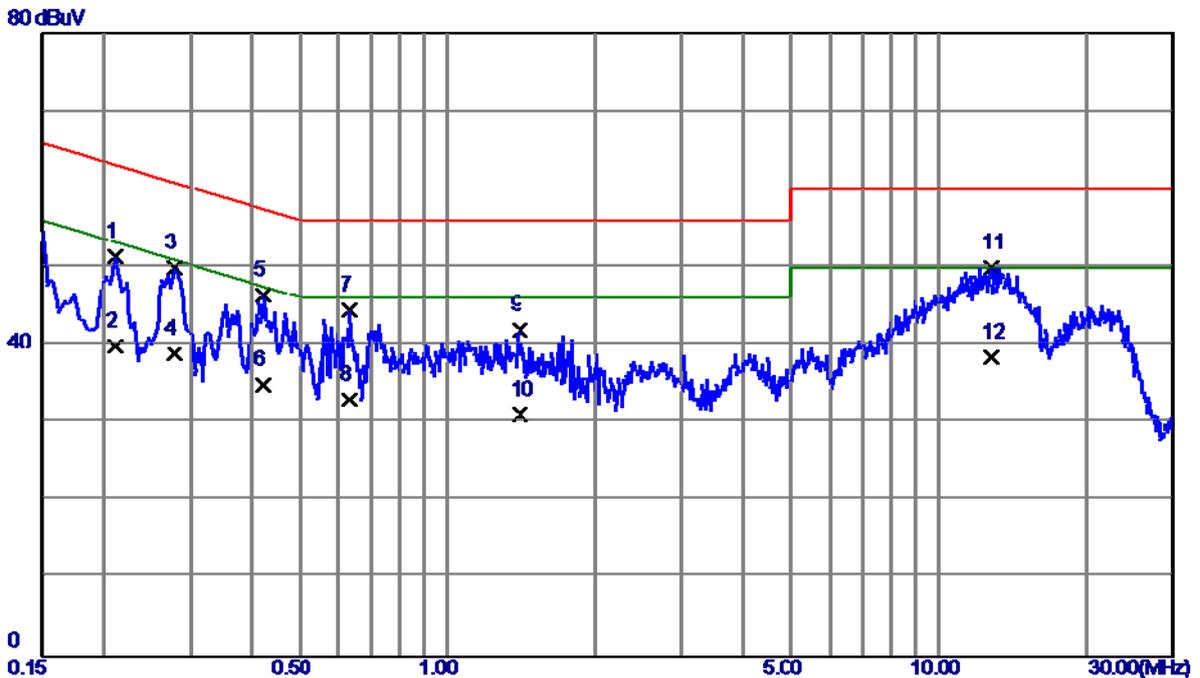


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2116	41.86	9.53	51.39	63.14	-11.75	QP
2	0.2116	30.25	9.53	39.78	53.14	-13.36	AVG
3	0.2787	40.36	9.53	49.89	60.85	-10.96	QP
4	0.2787	29.34	9.53	38.87	50.85	-11.98	AVG
5	0.4220	36.88	9.56	46.44	57.41	-10.97	QP
6	0.4220	25.34	9.56	34.90	47.41	-12.51	AVG
7	0.6300	34.84	9.64	44.48	56.00	-11.52	QP
8	0.6300	23.25	9.64	32.89	46.00	-13.11	AVG
9	1.4020	32.06	9.84	41.90	56.00	-14.10	QP
10	1.4020	21.25	9.84	31.09	46.00	-14.91	AVG
11 *	12.7580	39.61	10.29	49.90	60.00	-10.10	QP
12	12.7580	28.15	10.29	38.44	50.00	-11.56	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+playing+speaker		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

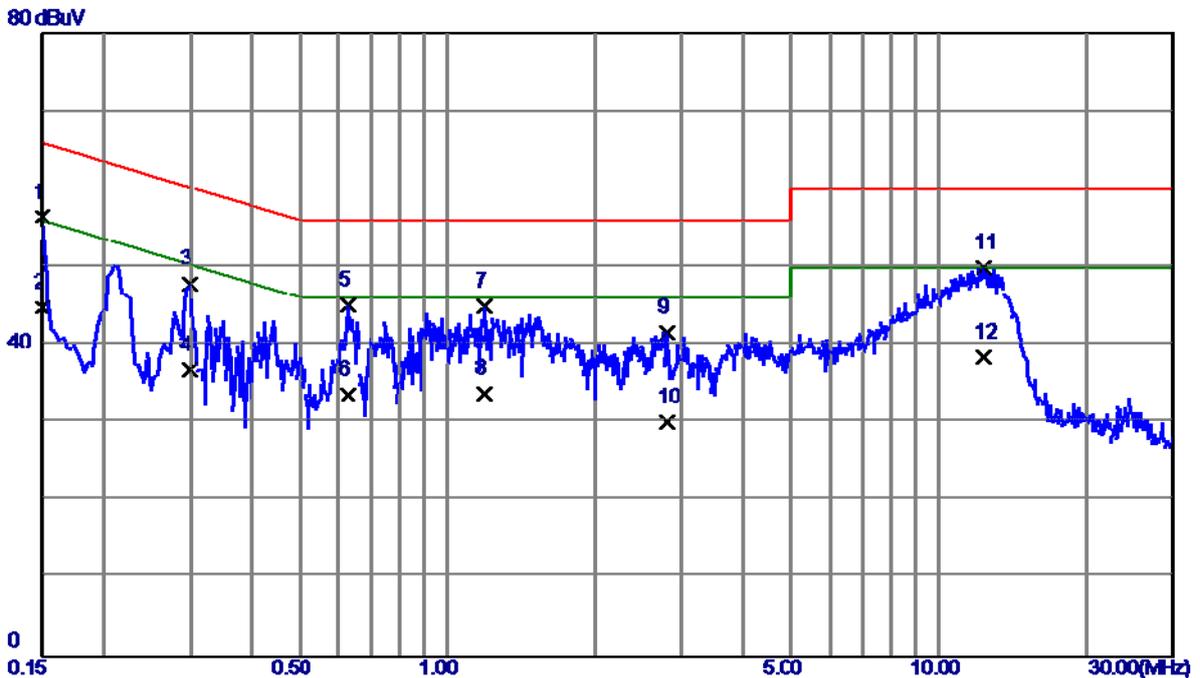


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1500	46.88	9.52	56.40	66.00	-9.60	QP
2	0.1500	35.25	9.52	44.77	56.00	-11.23	AVG
3	0.2980	38.35	9.53	47.88	60.30	-12.42	QP
4	0.2980	27.34	9.53	36.87	50.30	-13.43	AVG
5	0.6260	35.73	9.44	45.17	56.00	-10.83	QP
6	0.6260	24.14	9.44	33.58	46.00	-12.42	AVG
7	1.1900	35.29	9.67	44.96	56.00	-11.04	QP
8	1.1900	24.15	9.67	33.82	46.00	-12.18	AVG
9	2.7900	31.86	9.79	41.65	56.00	-14.35	QP
10	2.7900	20.34	9.79	30.13	46.00	-15.87	AVG
11	12.3380	39.66	10.33	49.99	60.00	-10.01	QP
12	12.3380	28.12	10.33	38.45	50.00	-11.55	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+playing+Earphone		
Note	Adapter:Huntkey+USB cable:Luxshare+Earphone:GoerTek		
Test Engineer	Lucky Mao		

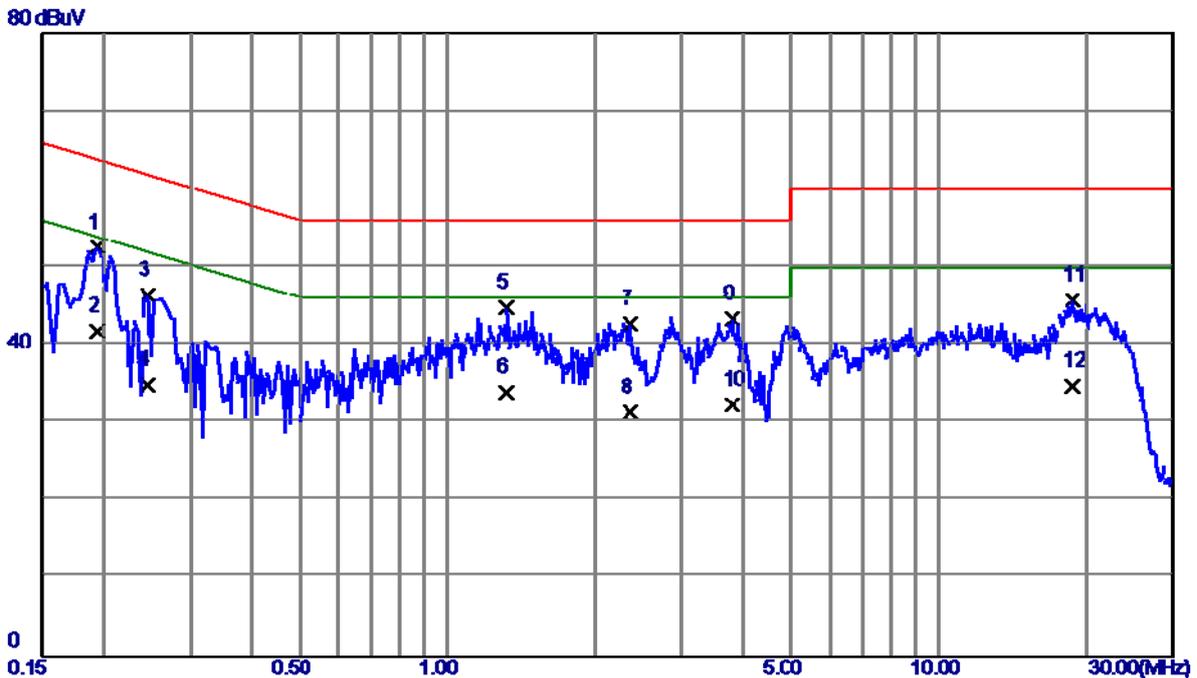


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	43.03	9.53	52.56	63.86	-11.30	QP
2	0.1940	32.25	9.53	41.78	53.86	-12.08	AVG
3	0.2460	36.87	9.53	46.40	61.89	-15.49	QP
4	0.2460	25.34	9.53	34.87	51.89	-17.02	AVG
5 *	1.3180	35.00	9.81	44.81	56.00	-11.19	QP
6	1.3180	24.12	9.81	33.93	46.00	-12.07	AVG
7	2.3580	32.73	10.03	42.76	56.00	-13.24	QP
8	2.3580	21.34	10.03	31.37	46.00	-14.63	AVG
9	3.7940	33.16	10.17	43.33	56.00	-12.67	QP
10	3.7940	22.15	10.17	32.32	46.00	-13.68	AVG
11	18.7220	35.35	10.39	45.74	60.00	-14.26	QP
12	18.7220	24.34	10.39	34.73	50.00	-15.27	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+playing+Earphone		
Note	Adapter:Huntkey+USB cable:Luxshare+Earphone:GoerTek		
Test Engineer	Lucky Mao		

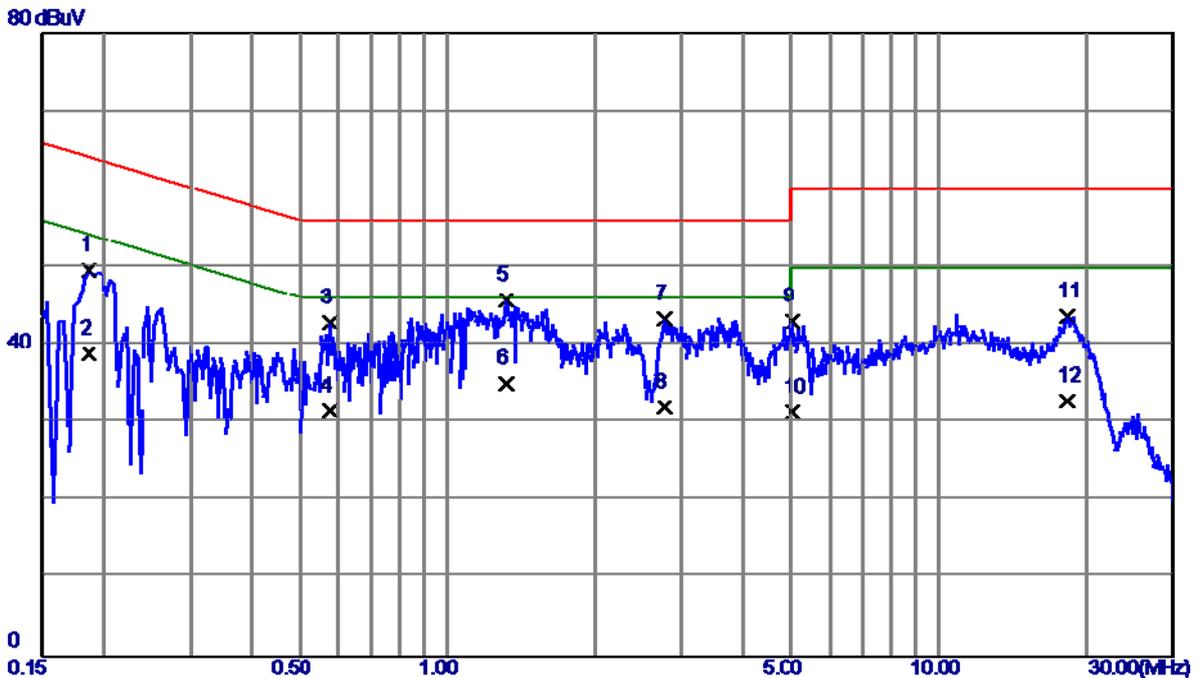


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1860	40.17	9.48	49.65	64.21	-14.56	QP
2	0.1860	29.34	9.48	38.82	54.21	-15.39	AVG
3	0.5780	33.45	9.44	42.89	56.00	-13.11	QP
4	0.5780	22.14	9.44	31.58	46.00	-14.42	AVG
5 *	1.3180	36.12	9.67	45.79	56.00	-10.21	QP
6	1.3180	25.34	9.67	35.01	46.00	-10.99	AVG
7	2.7659	33.58	9.79	43.37	56.00	-12.63	QP
8	2.7659	22.15	9.79	31.94	46.00	-14.06	AVG
9	5.0420	32.99	9.99	42.98	60.00	-17.02	QP
10	5.0420	21.38	9.99	31.37	50.00	-18.63	AVG
11	18.2740	33.26	10.45	43.71	60.00	-16.29	QP
12	18.2740	22.39	10.45	32.84	50.00	-17.16	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+playing+Earphone		
Note	Adapter:Huntkey+USB cable:Luxshare+Earphone:Lianchuang		
Test Engineer	Lucky Mao		

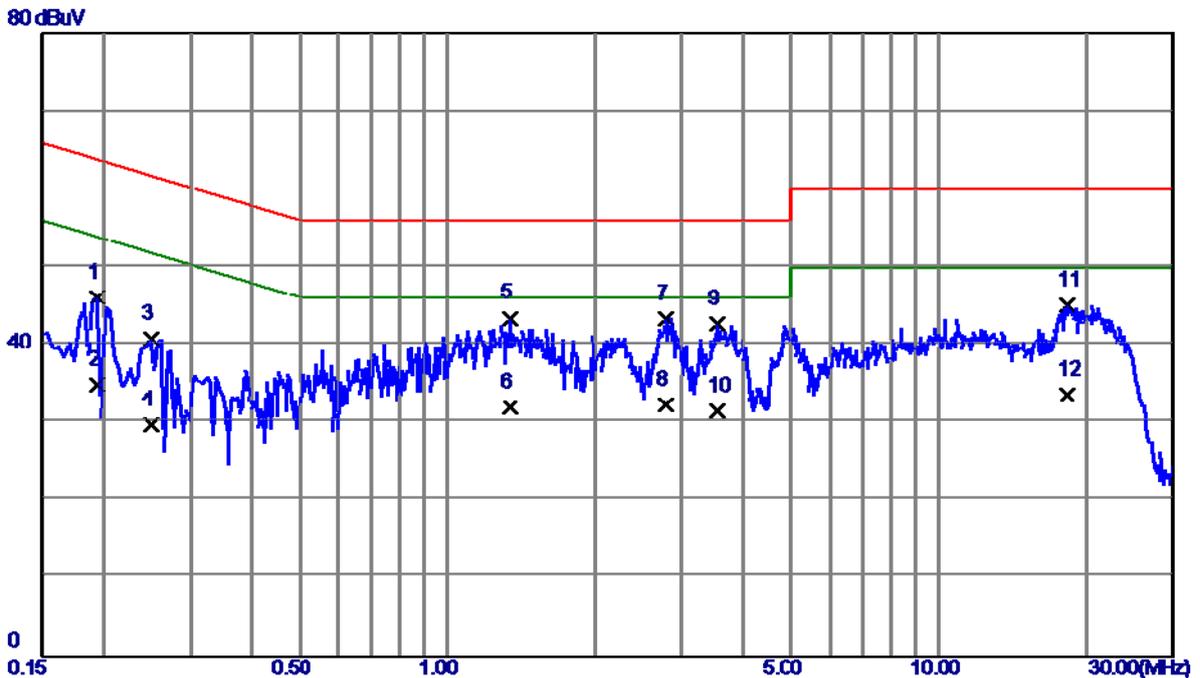


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	36.53	9.53	46.06	63.86	-17.80	QP
2	0.1940	25.34	9.53	34.87	53.86	-18.99	AVG
3	0.2500	31.26	9.53	40.79	61.76	-20.97	QP
4	0.2500	20.25	9.53	29.78	51.76	-21.98	AVG
5 *	1.3380	33.62	9.82	43.44	56.00	-12.56	QP
6	1.3380	22.14	9.82	31.96	46.00	-14.04	AVG
7	2.7740	33.31	10.09	43.40	56.00	-12.60	QP
8	2.7740	22.25	10.09	32.34	46.00	-13.66	AVG
9	3.5300	32.57	10.14	42.71	56.00	-13.29	QP
10	3.5300	21.38	10.14	31.52	46.00	-14.48	AVG
11	18.3340	34.70	10.39	45.09	60.00	-14.91	QP
12	18.3340	23.23	10.39	33.62	50.00	-16.38	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+playing+Earphone		
Note	Adapter:Huntkey+USB cable:Luxshare+Earphone:Lianchuang		
Test Engineer	Lucky Mao		

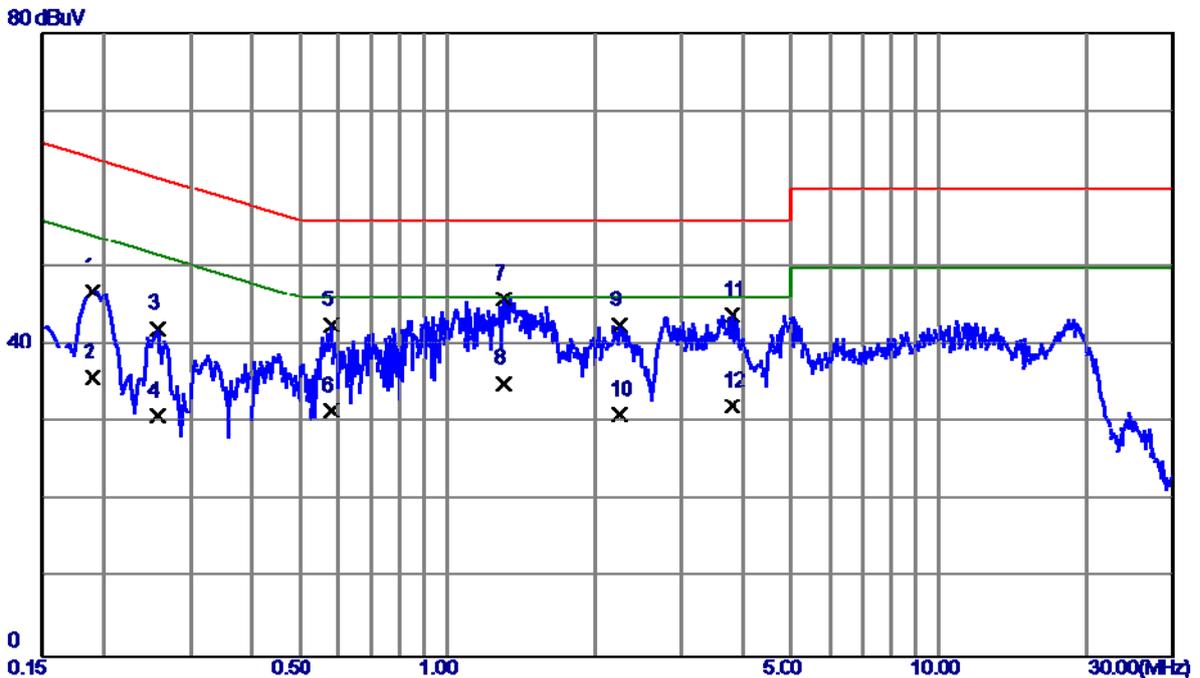


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1900	37.42	9.49	46.91	64.04	-17.13	QP
2	0.1900	26.33	9.49	35.82	54.04	-18.22	AVG
3	0.2580	32.57	9.53	42.10	61.50	-19.40	QP
4	0.2580	21.34	9.53	30.87	51.50	-20.63	AVG
5	0.5820	33.16	9.44	42.60	56.00	-13.40	QP
6	0.5820	22.15	9.44	31.59	46.00	-14.41	AVG
7 *	1.3020	36.31	9.67	45.98	56.00	-10.02	QP
8	1.3020	25.34	9.67	35.01	46.00	-10.99	AVG
9	2.2340	32.78	9.74	42.52	56.00	-13.48	QP
10	2.2340	21.25	9.74	30.99	46.00	-15.01	AVG
11	3.8100	33.98	9.87	43.85	56.00	-12.15	QP
12	3.8100	22.34	9.87	32.21	46.00	-13.79	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+playing+Earphone		
Note	Adapter:Huntkey+USB cable:Luxshare+Earphone:QUANCHENG		
Test Engineer	Lucky Mao		

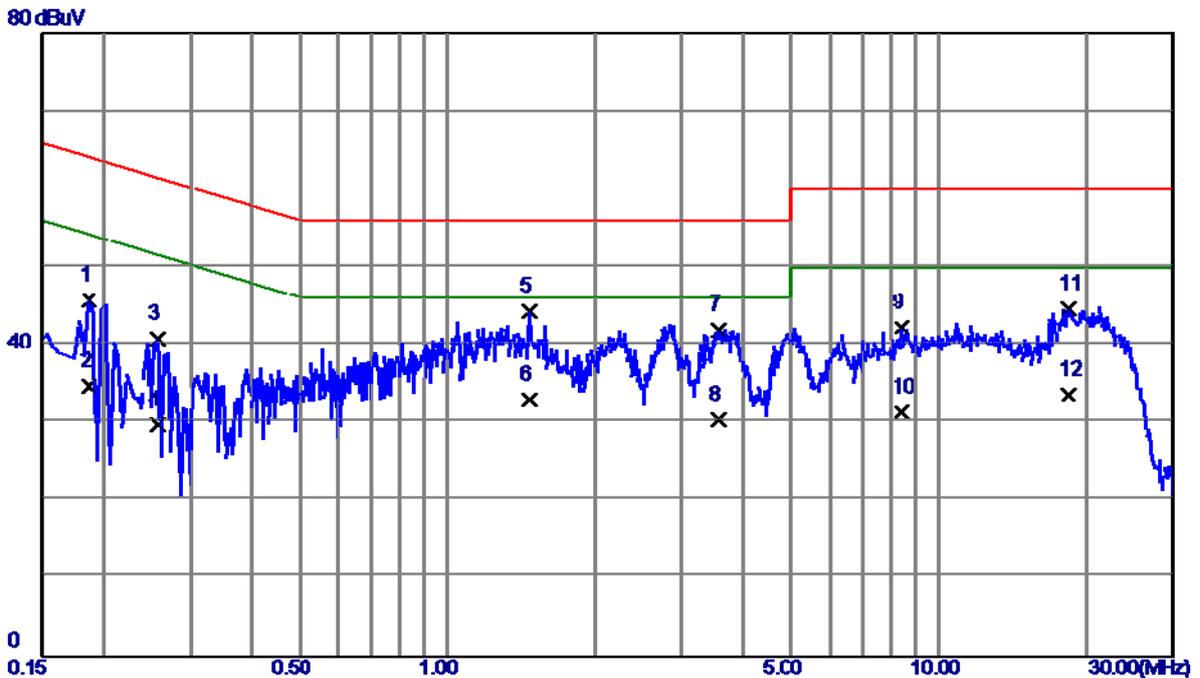


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1860	36.18	9.53	45.71	64.21	-18.50	QP
2	0.1860	25.14	9.53	34.67	54.21	-19.54	AVG
3	0.2580	31.32	9.53	40.85	61.50	-20.65	QP
4	0.2580	20.23	9.53	29.76	51.50	-21.74	AVG
5 *	1.4740	34.39	9.87	44.26	56.00	-11.74	QP
6	1.4740	23.13	9.87	33.00	46.00	-13.00	AVG
7	3.5660	31.84	10.15	41.99	56.00	-14.01	QP
8	3.5660	20.25	10.15	30.40	46.00	-15.60	AVG
9	8.4060	32.04	10.19	42.23	60.00	-17.77	QP
10	8.4060	21.23	10.19	31.42	50.00	-18.58	AVG
11	18.4380	34.18	10.39	44.57	60.00	-15.43	QP
12	18.4380	23.23	10.39	33.62	50.00	-16.38	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+playing+Earphone		
Note	Adapter:Huntkey+USB cable:Luxshare+Earphone:QUANCHENG		
Test Engineer	Lucky Mao		

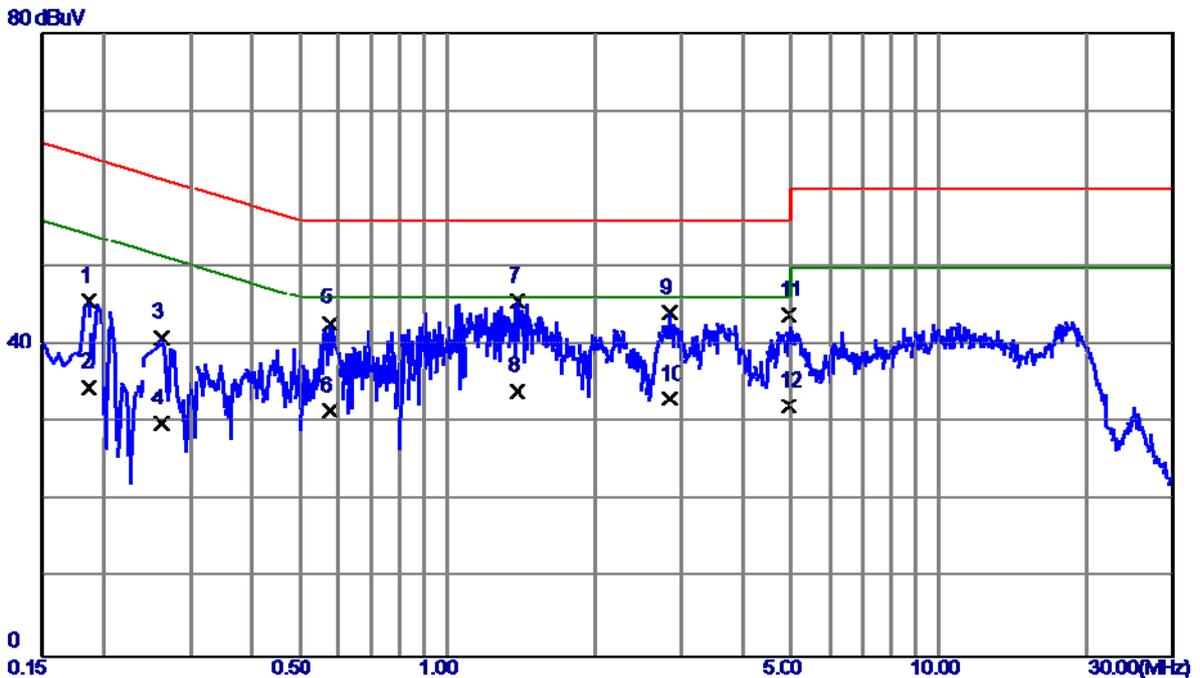


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1860	36.10	9.48	45.58	64.21	-18.63	QP
2	0.1860	25.14	9.48	34.62	54.21	-19.59	AVG
3	0.2620	31.46	9.53	40.99	61.37	-20.38	QP
4	0.2620	20.34	9.53	29.87	51.37	-21.50	AVG
5	0.5780	33.36	9.44	42.80	56.00	-13.20	QP
6	0.5780	22.14	9.44	31.58	46.00	-14.42	AVG
7 *	1.3860	35.99	9.67	45.66	56.00	-10.34	QP
8	1.3860	24.35	9.67	34.02	46.00	-11.98	AVG
9	2.8300	34.32	9.79	44.11	56.00	-11.89	QP
10	2.8300	23.25	9.79	33.04	46.00	-12.96	AVG
11	4.9500	33.90	9.98	43.88	56.00	-12.12	QP
12	4.9500	22.14	9.98	32.12	46.00	-13.88	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

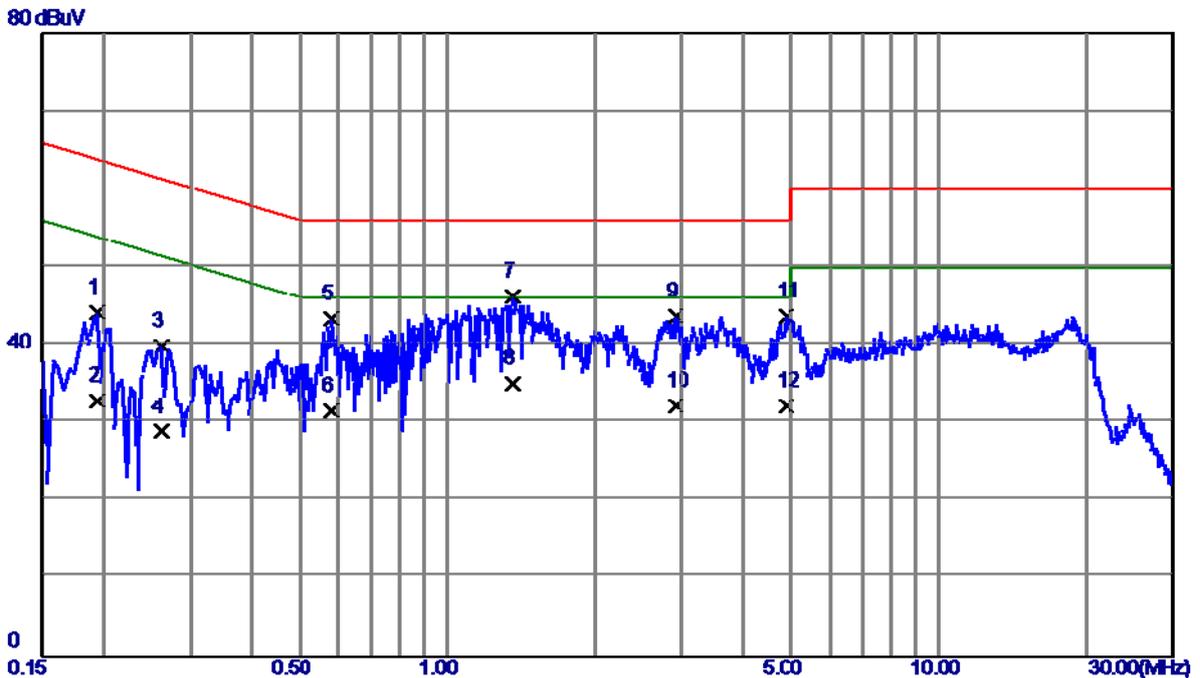


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	34.58	9.51	44.09	63.86	-19.77	QP
2	0.1940	23.25	9.51	32.76	53.86	-21.10	AVG
3	0.2620	30.26	9.53	39.79	61.37	-21.58	QP
4	0.2620	19.35	9.53	28.88	51.37	-22.49	AVG
5	0.5820	33.85	9.44	43.29	56.00	-12.71	QP
6	0.5820	22.14	9.44	31.58	46.00	-14.42	AVG
7 *	1.3580	36.53	9.67	46.20	56.00	-9.80	QP
8	1.3580	25.34	9.67	35.01	46.00	-10.99	AVG
9	2.9219	33.86	9.79	43.65	56.00	-12.35	QP
10	2.9219	22.34	9.79	32.13	46.00	-13.87	AVG
11	4.8820	33.68	9.98	43.66	56.00	-12.34	QP
12	4.8820	22.12	9.98	32.10	46.00	-13.90	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

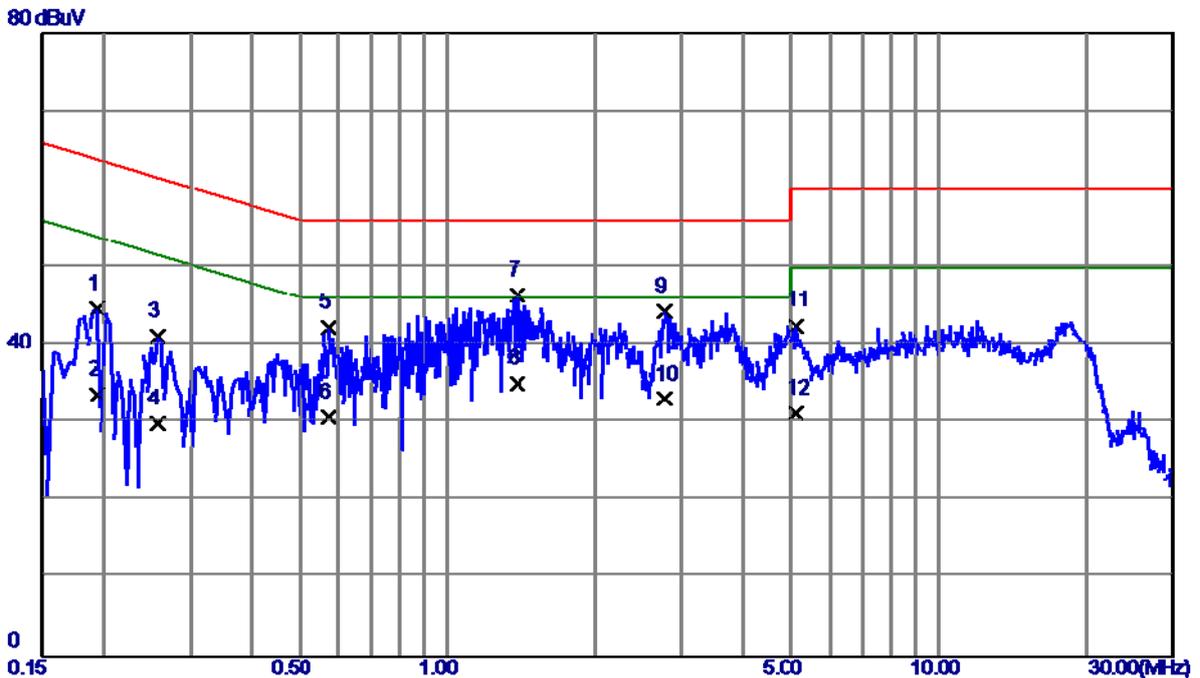


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	35.17	9.51	44.68	63.86	-19.18	QP
2	0.1940	24.15	9.51	33.66	53.86	-20.20	AVG
3	0.2580	31.62	9.53	41.15	61.50	-20.35	QP
4	0.2580	20.34	9.53	29.87	51.50	-21.63	AVG
5	0.5740	32.86	9.44	42.30	56.00	-13.70	QP
6	0.5740	21.25	9.44	30.69	46.00	-15.31	AVG
7 *	1.3860	36.70	9.67	46.37	56.00	-9.63	QP
8	1.3860	25.34	9.67	35.01	46.00	-10.99	AVG
9	2.7659	34.54	9.79	44.33	56.00	-11.67	QP
10	2.7659	23.25	9.79	33.04	46.00	-12.96	AVG
11	5.1380	32.49	9.99	42.48	60.00	-17.52	QP
12	5.1380	21.22	9.99	31.21	50.00	-18.79	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

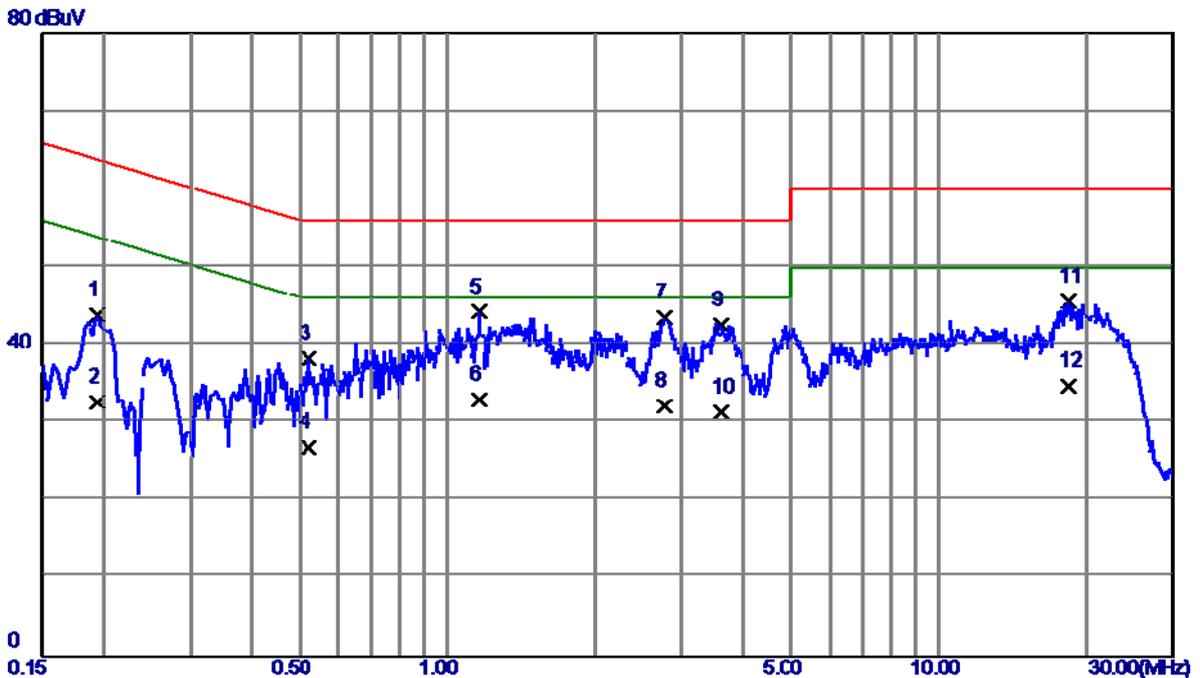


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	34.38	9.53	43.91	63.86	-19.95	QP
2	0.1940	23.14	9.53	32.67	53.86	-21.19	AVG
3	0.5220	28.64	9.64	38.28	56.00	-17.72	QP
4	0.5220	17.25	9.64	26.89	46.00	-19.11	AVG
5 *	1.1620	34.48	9.76	44.24	56.00	-11.76	QP
6	1.1620	23.25	9.76	33.01	46.00	-12.99	AVG
7	2.7659	33.38	10.09	43.47	56.00	-12.53	QP
8	2.7659	22.14	10.09	32.23	46.00	-13.77	AVG
9	3.6060	32.37	10.15	42.52	56.00	-13.48	QP
10	3.6060	21.23	10.15	31.38	46.00	-14.62	AVG
11	18.4180	35.22	10.39	45.61	60.00	-14.39	QP
12	18.4180	24.34	10.39	34.73	50.00	-15.27	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

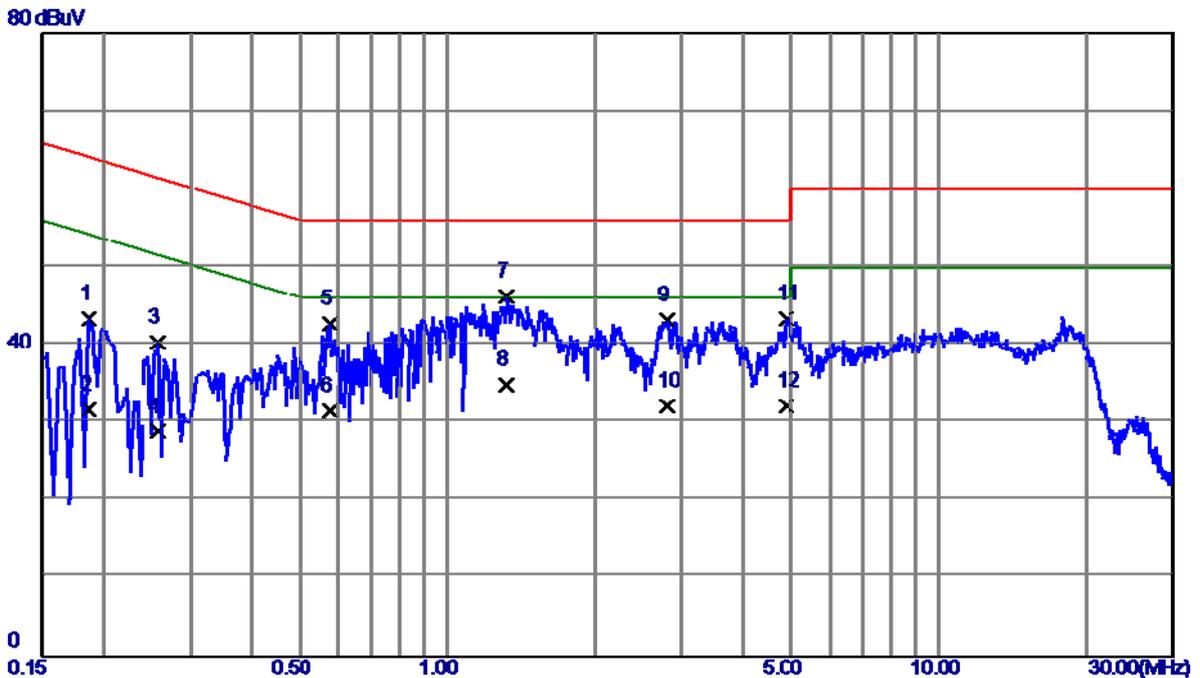


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1860	33.89	9.48	43.37	64.21	-20.84	QP
2	0.1860	22.14	9.48	31.62	54.21	-22.59	AVG
3	0.2580	30.73	9.53	40.26	61.50	-21.24	QP
4	0.2580	19.35	9.53	28.88	51.50	-22.62	AVG
5	0.5780	33.21	9.44	42.65	56.00	-13.35	QP
6	0.5780	22.14	9.44	31.58	46.00	-14.42	AVG
7 *	1.3180	36.57	9.67	46.24	56.00	-9.76	QP
8	1.3180	25.23	9.67	34.90	46.00	-11.10	AVG
9	2.7940	33.47	9.79	43.26	56.00	-12.74	QP
10	2.7940	22.34	9.79	32.13	46.00	-13.87	AVG
11	4.8820	33.40	9.98	43.38	56.00	-12.62	QP
12	4.8820	22.23	9.98	32.21	46.00	-13.79	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

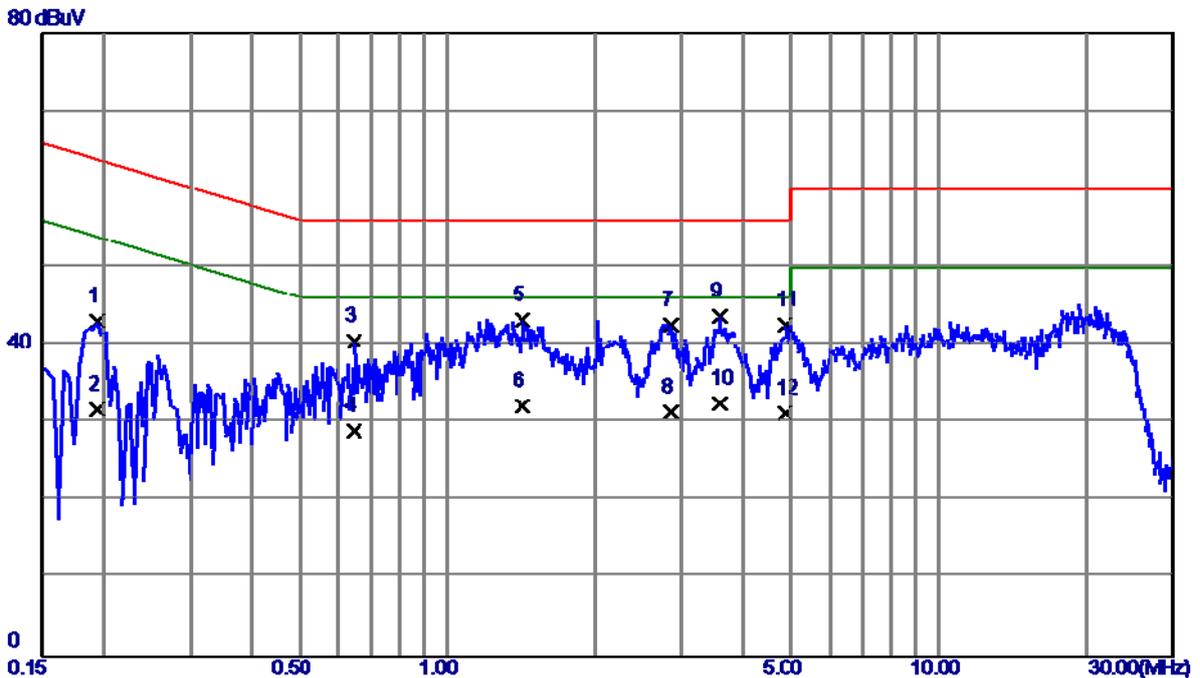

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	33.44	9.53	42.97	63.86	-20.89	QP
2	0.1940	22.14	9.53	31.67	53.86	-22.19	AVG
3	0.6460	30.90	9.64	40.54	56.00	-15.46	QP
4	0.6460	19.25	9.64	28.89	46.00	-17.11	AVG
5	1.4220	33.34	9.85	43.19	56.00	-12.81	QP
6	1.4220	22.33	9.85	32.18	46.00	-13.82	AVG
7	2.8460	32.51	10.09	42.60	56.00	-13.40	QP
8	2.8460	21.25	10.09	31.34	46.00	-14.66	AVG
9 *	3.5780	33.49	10.15	43.64	56.00	-12.36	QP
10	3.5780	22.34	10.15	32.49	46.00	-13.51	AVG
11	4.8740	32.52	10.02	42.54	56.00	-13.46	QP
12	4.8740	21.23	10.02	31.25	46.00	-14.75	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey+USB cable:Luxshare		
Test Engineer	Lucky Mao		

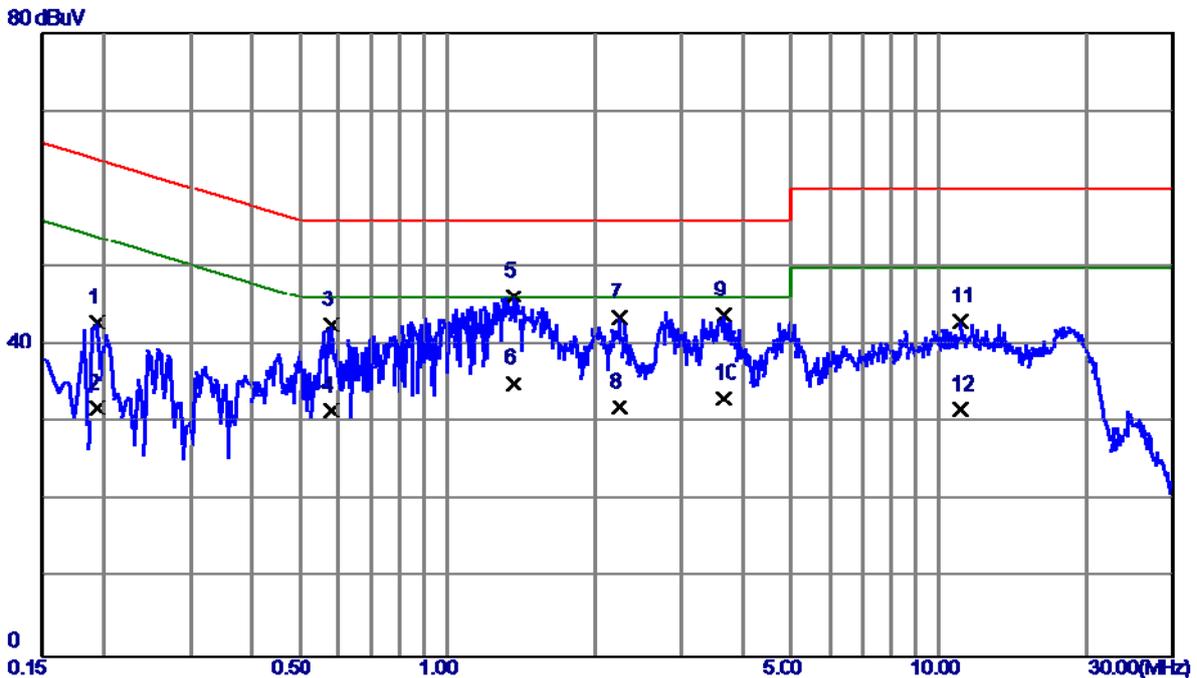

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.1940	33.31	9.51	42.82	63.86	-21.04	QP
2	0.1940	22.32	9.51	31.83	53.86	-22.03	AVG
3	0.5820	33.15	9.44	42.59	56.00	-13.41	QP
4	0.5820	22.14	9.44	31.58	46.00	-14.42	AVG
5 *	1.3619	36.54	9.67	46.21	56.00	-9.79	QP
6	1.3619	25.34	9.67	35.01	46.00	-10.99	AVG
7	2.2340	33.78	9.74	43.52	56.00	-12.48	QP
8	2.2340	22.25	9.74	31.99	46.00	-14.01	AVG
9	3.6460	34.06	9.85	43.91	56.00	-12.09	QP
10	3.6460	23.28	9.85	33.13	46.00	-12.87	AVG
11	11.0860	32.67	10.32	42.99	60.00	-17.01	QP
12	11.0860	21.34	10.32	31.66	50.00	-18.34	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 27, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-SM-10000(1GHz – 26.5GHz)	C-68	Jun. 27, 2017
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

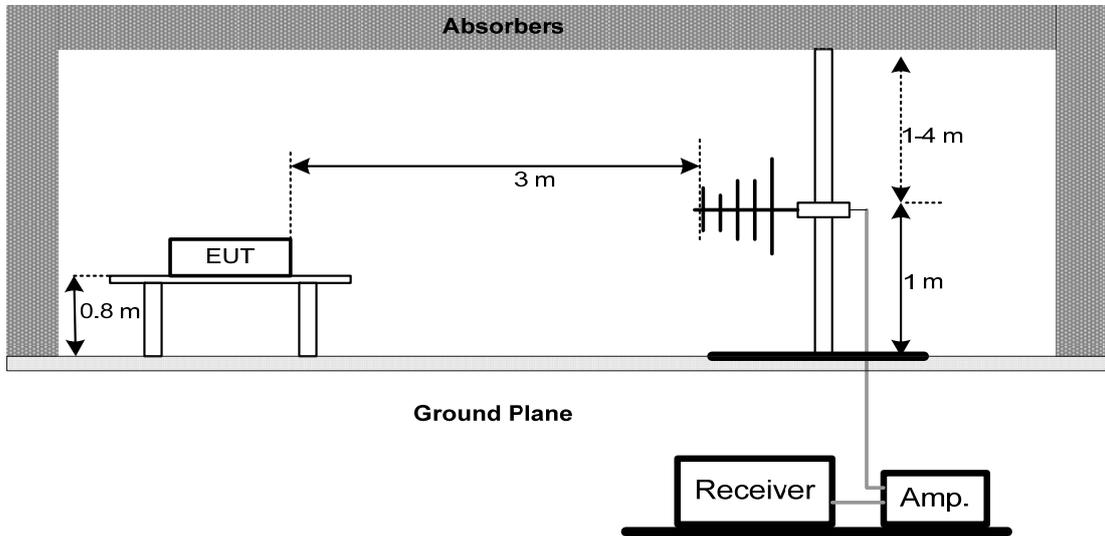

(B) Radiated Emission Test Set-Up Frequency 1 GHz

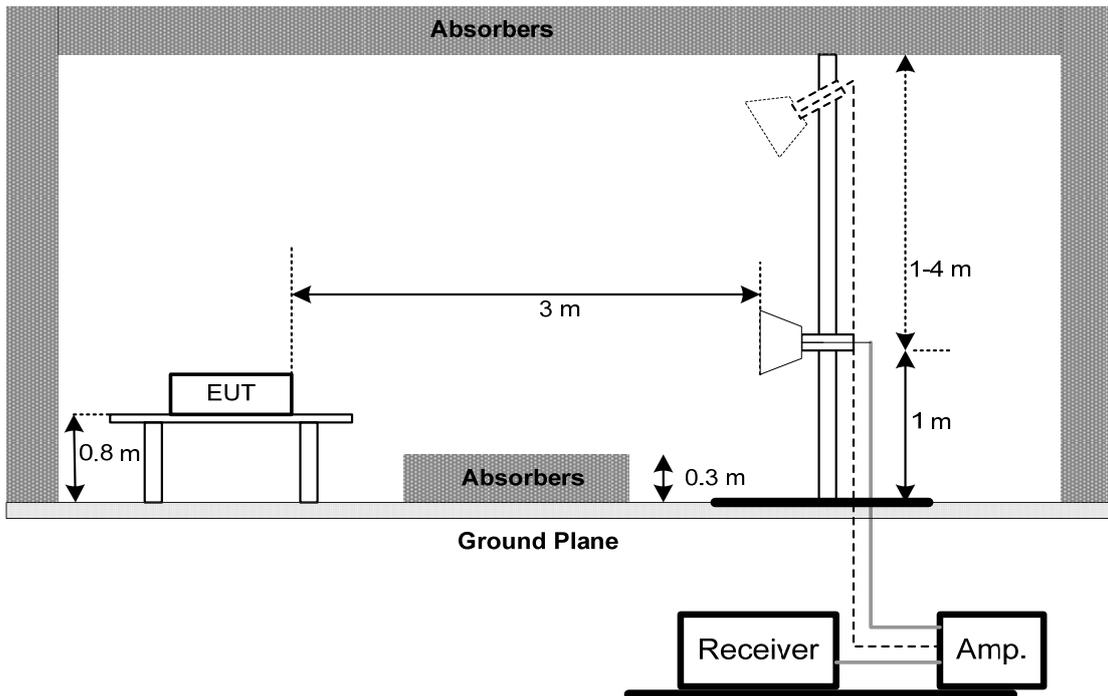

4.2.6 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.7 TEST RESULTS-BELOW 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz.
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		

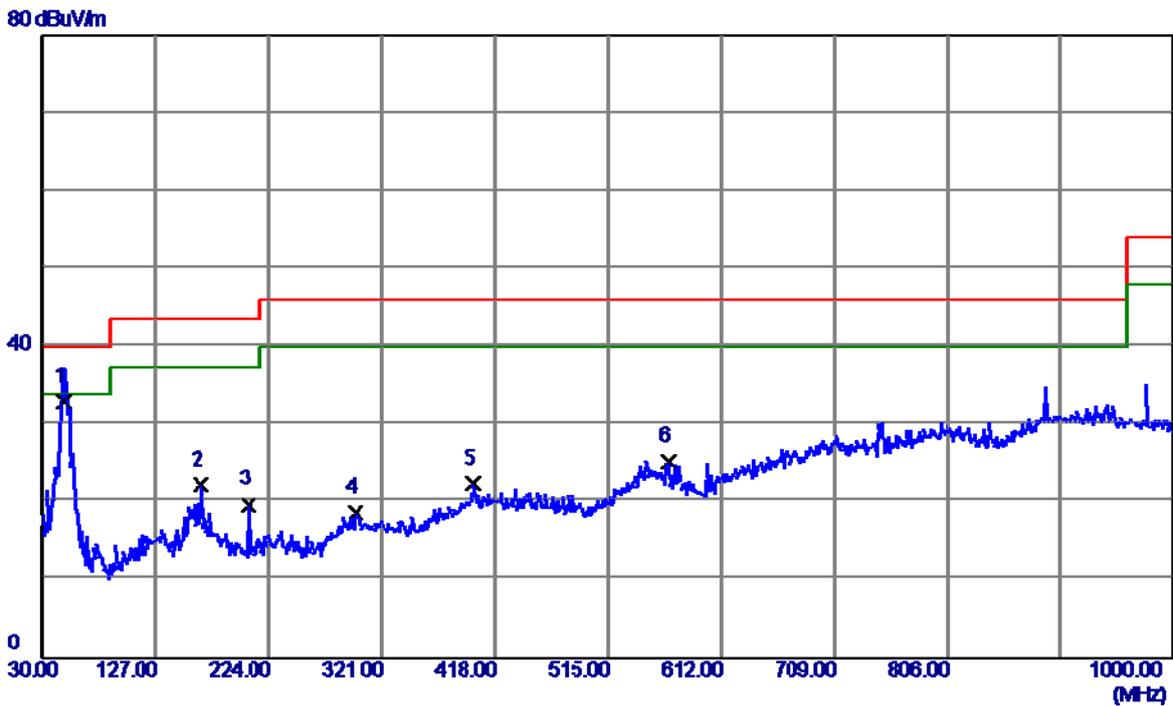


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	48.4300	46.01	-13.11	32.90	40.00	-7.10	QP
2	165.8000	34.42	-12.20	22.22	43.50	-21.28	QP
3	206.5399	34.33	-14.57	19.76	43.50	-23.74	QP
4	298.6900	28.97	-10.30	18.67	46.00	-27.33	QP
5	399.5700	30.26	-7.81	22.45	46.00	-23.55	QP
6	566.4099	30.71	-5.37	25.34	46.00	-20.66	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		

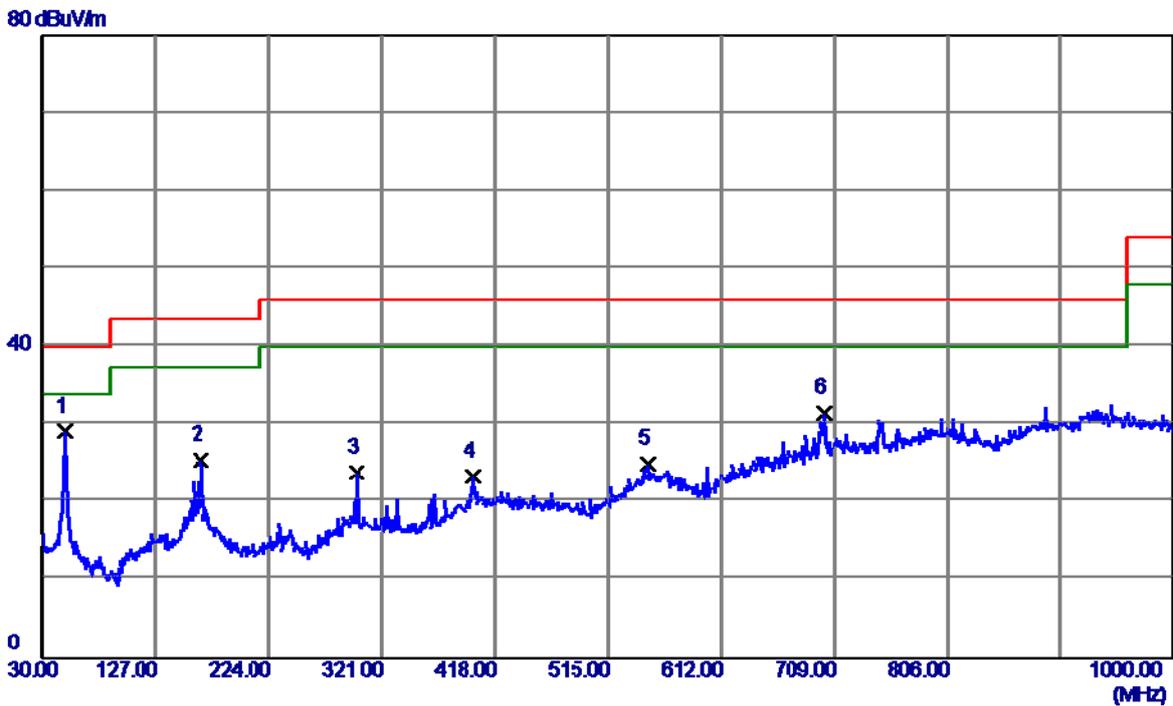


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	49.4000	42.41	-13.30	29.11	40.00	-10.89	QP
2	165.8000	37.66	-12.20	25.46	43.50	-18.04	QP
3	299.6600	34.06	-10.20	23.86	46.00	-22.14	QP
4	399.5700	31.20	-7.81	23.39	46.00	-22.61	QP
5	549.9200	29.46	-4.55	24.91	46.00	-21.09	QP
6	700.2700	33.63	-2.10	31.53	46.00	-14.47	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:HONGLIN		
Test Engineer	Lucky Mao		

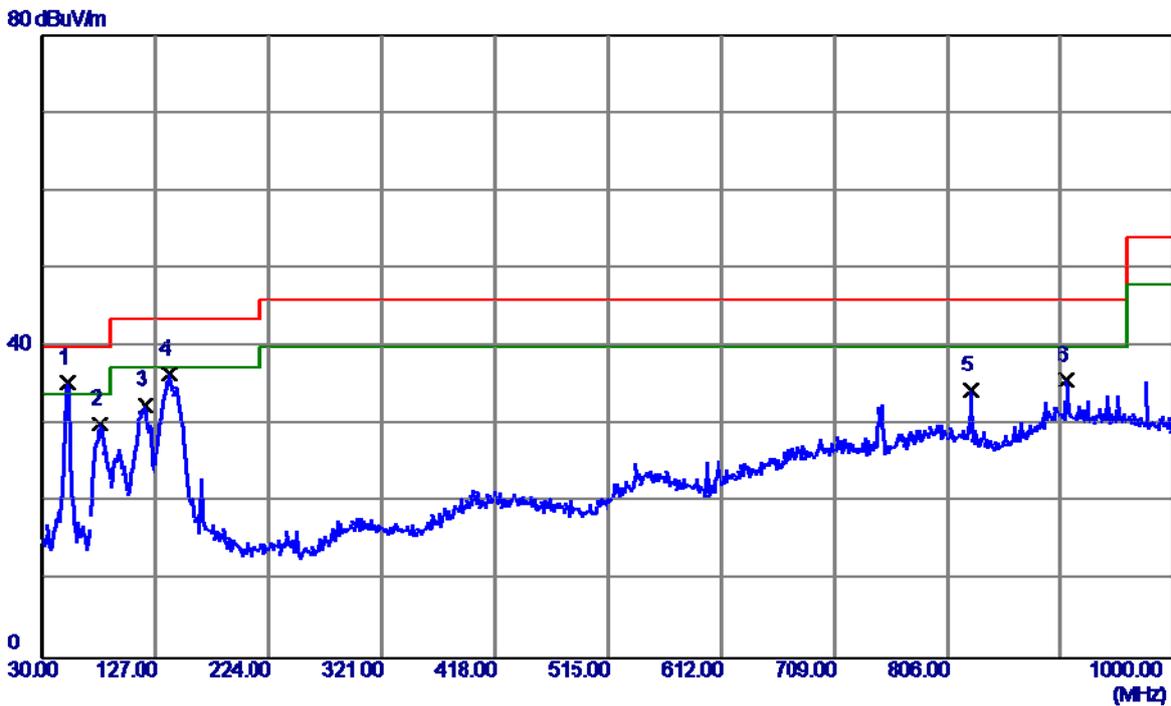


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	51.3400	49.13	-13.73	35.40	40.00	-4.60	QP
2	79.4700	46.22	-16.10	30.12	40.00	-9.88	QP
3	118.2700	46.21	-13.66	32.55	43.50	-10.95	QP
4	138.6400	50.06	-13.56	36.50	43.50	-7.00	QP
5	826.3700	34.98	-0.54	34.44	46.00	-11.56	QP
6	908.8200	33.13	2.60	35.73	46.00	-10.27	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:HONGLIN		
Test Engineer	Lucky Mao		

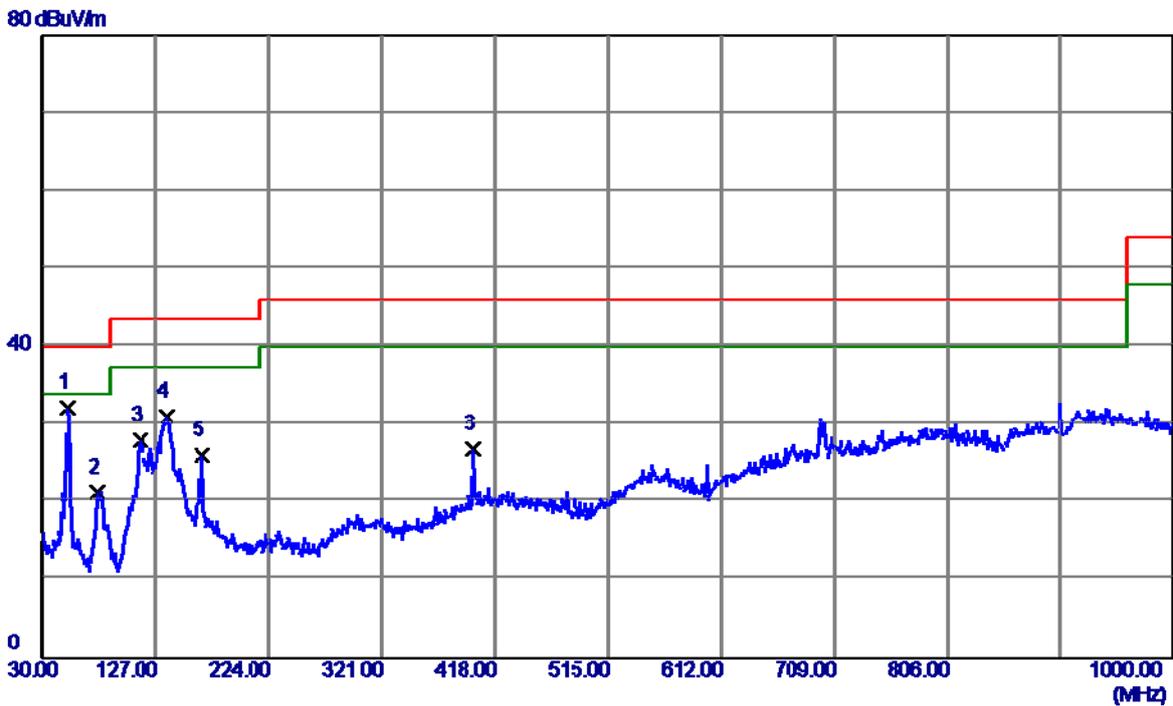


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	51.3400	45.82	-13.73	32.09	40.00	-7.91	QP
2	77.5300	37.66	-16.31	21.35	40.00	-18.65	QP
3	114.3900	42.18	-14.13	28.05	43.50	-15.45	QP
4	136.7000	44.37	-13.29	31.08	43.50	-12.42	QP
5	166.7700	38.30	-12.21	26.09	43.50	-17.41	QP
6	399.5700	34.65	-7.81	26.84	46.00	-19.16	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		

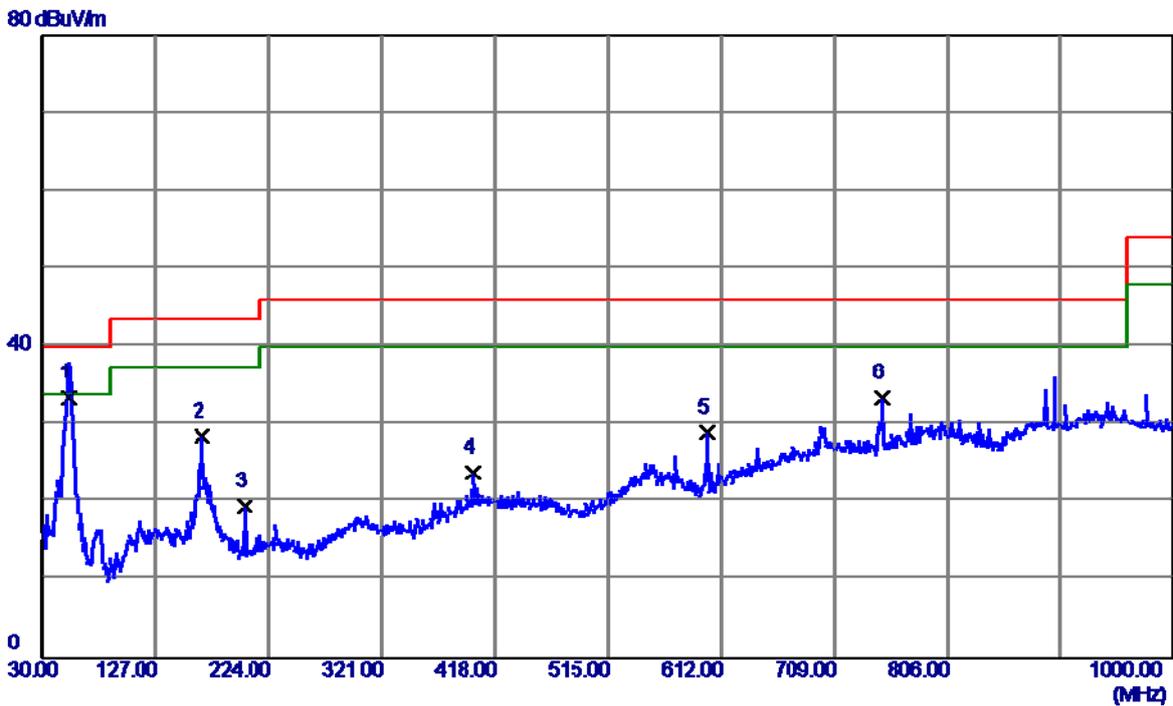


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	52.3100	47.30	-13.84	33.46	40.00	-6.54	QP
2	166.7700	40.69	-12.21	28.48	43.50	-15.02	QP
3	203.6300	34.00	-14.51	19.49	43.50	-24.01	QP
4	399.5700	31.64	-7.81	23.83	46.00	-22.17	QP
5	600.3600	35.93	-7.04	28.89	46.00	-17.11	QP
6	749.7400	35.34	-1.97	33.37	46.00	-12.63	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		

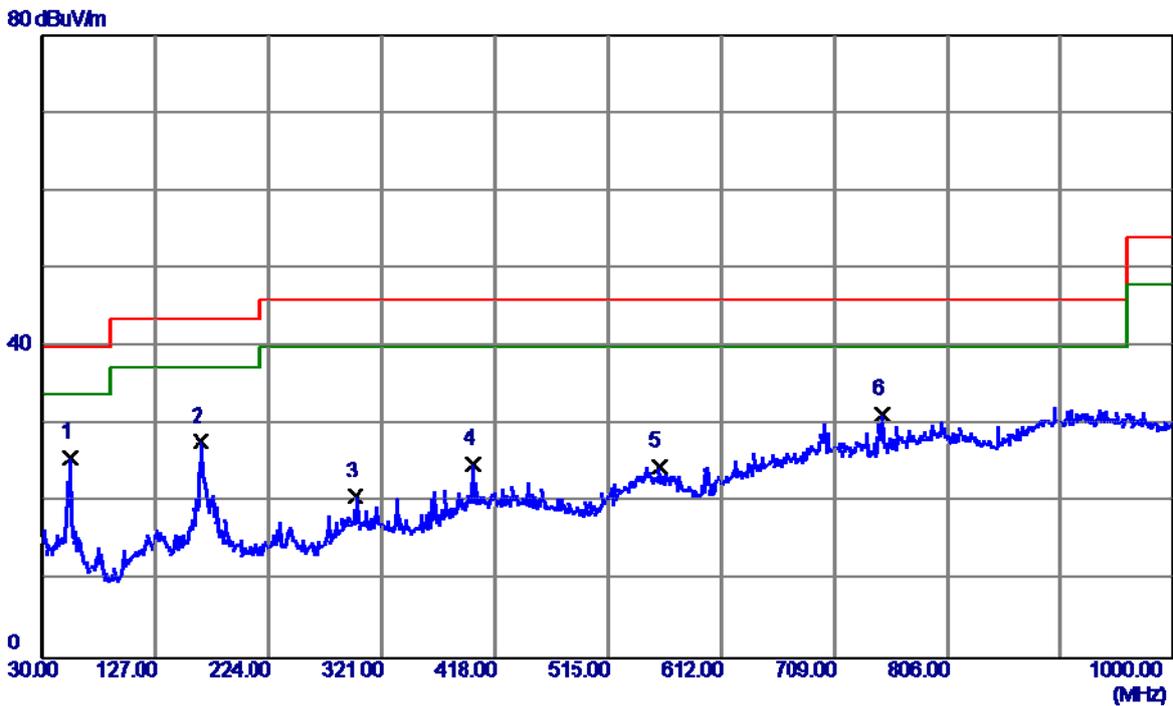


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	53.2800	39.40	-13.69	25.71	40.00	-14.29	QP
2	165.8000	40.04	-12.20	27.84	43.50	-15.66	QP
3	298.6900	31.08	-10.30	20.78	46.00	-25.22	QP
4	399.5700	32.72	-7.81	24.91	46.00	-21.09	QP
5	558.6500	29.56	-4.98	24.58	46.00	-21.42	QP
6	749.7400	33.29	-1.97	31.32	46.00	-14.68	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

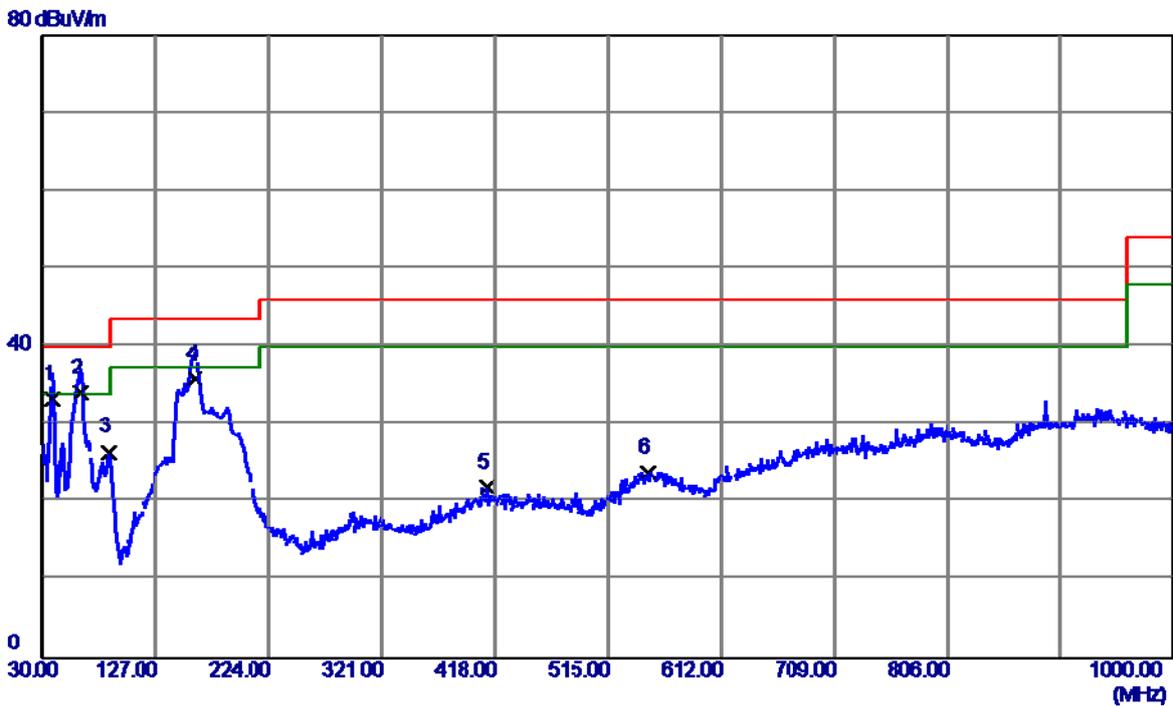


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	47.28	-14.06	33.22	40.00	-6.78	QP
2 *	62.0100	48.32	-14.30	34.02	40.00	-5.98	QP
3	87.2300	43.90	-17.42	26.48	40.00	-13.52	QP
4	160.9500	47.99	-12.16	35.83	43.50	-7.67	QP
5	411.2100	29.69	-7.83	21.86	46.00	-24.14	QP
6	549.9200	28.46	-4.55	23.91	46.00	-22.09	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

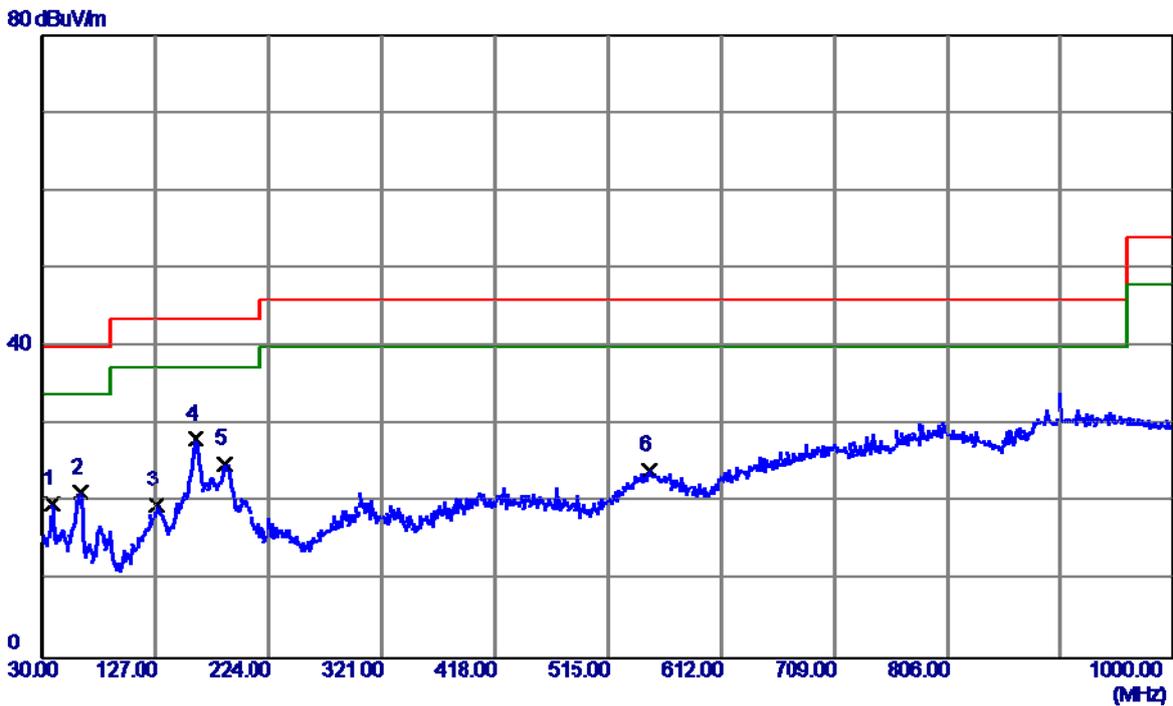


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	33.92	-14.06	19.86	40.00	-20.14	QP
2	62.0100	35.60	-14.30	21.30	40.00	-18.70	QP
3	127.9700	32.25	-12.58	19.67	43.50	-23.83	QP
4 *	161.9200	40.34	-12.16	28.18	43.50	-15.32	QP
5	186.1700	38.40	-13.51	24.89	43.50	-18.61	QP
6	550.8900	28.81	-4.58	24.23	46.00	-21.77	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

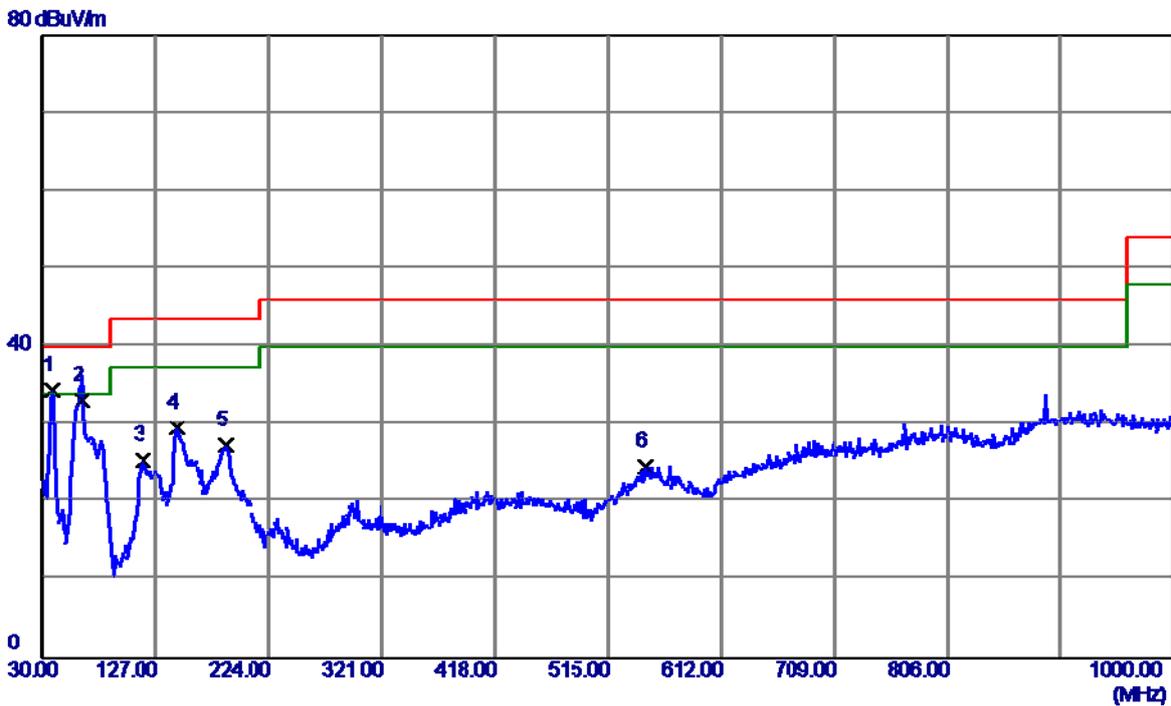


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	38.7300	48.49	-14.06	34.43	40.00	-5.57	QP
2	62.9800	47.70	-14.58	33.12	40.00	-6.88	QP
3	116.3300	39.40	-13.90	25.50	43.50	-18.00	QP
4	145.4299	42.98	-13.32	29.66	43.50	-13.84	QP
5	187.1400	40.93	-13.62	27.31	43.50	-16.19	QP
6	547.0100	29.54	-4.85	24.69	46.00	-21.31	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

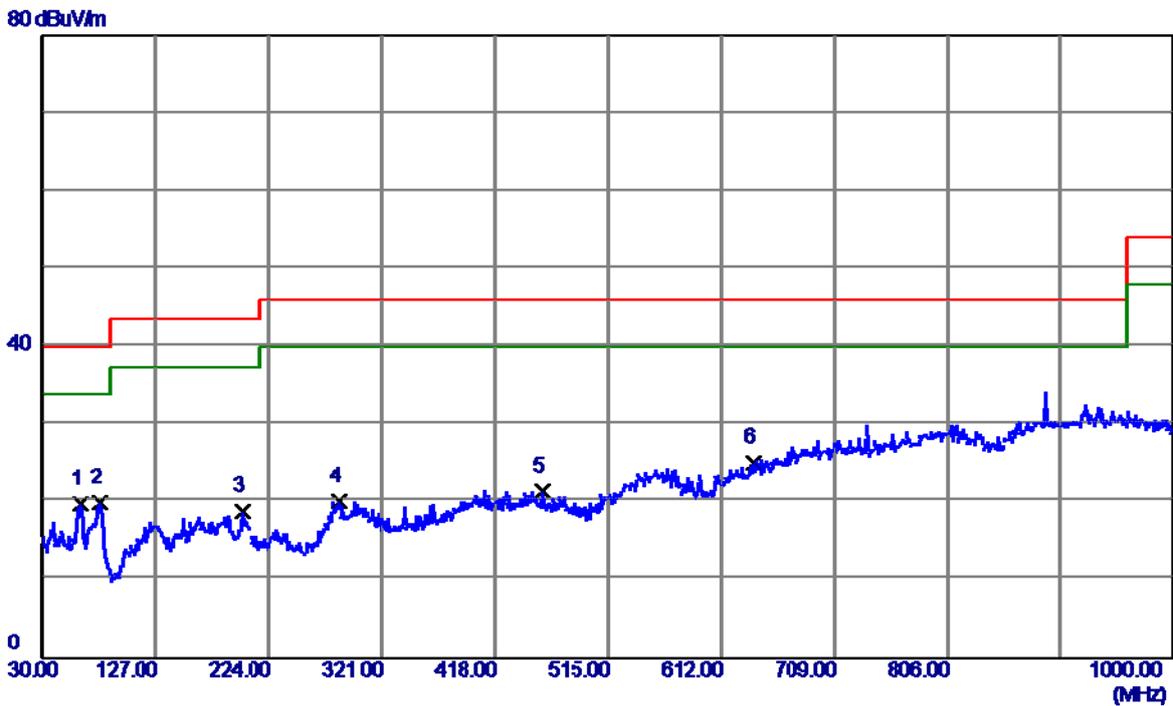


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	62.0100	34.16	-14.30	19.86	40.00	-20.14	QP
2 *	79.4700	36.17	-16.10	20.07	40.00	-19.93	QP
3	201.6900	33.32	-14.47	18.85	43.50	-24.65	QP
4	284.1400	31.90	-11.71	20.19	46.00	-25.81	QP
5	458.7400	29.72	-8.30	21.42	46.00	-24.58	QP
6	640.1300	29.88	-4.75	25.13	46.00	-20.87	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Phitek		
Test Engineer	Lucky Mao		

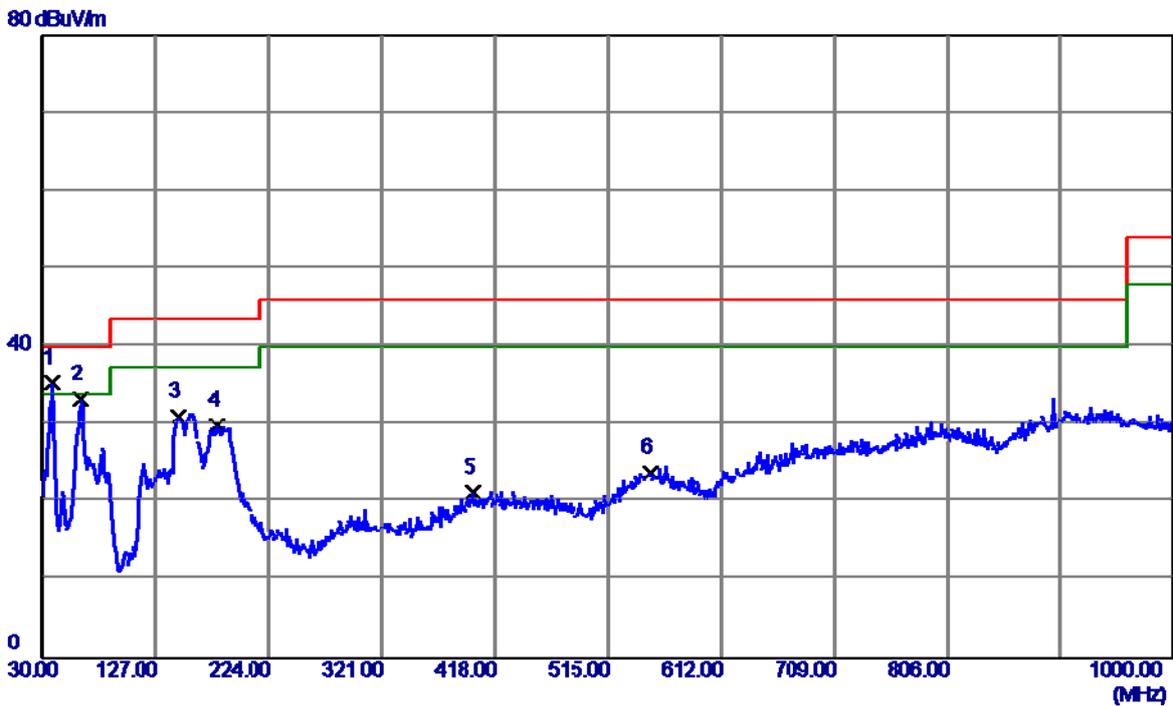


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	38.7300	49.36	-14.06	35.30	40.00	-4.70	QP
2	62.0100	47.62	-14.30	33.32	40.00	-6.68	QP
3	146.4000	44.24	-13.24	31.00	43.50	-12.50	QP
4	180.3500	42.78	-12.88	29.90	43.50	-13.60	QP
5	399.5700	29.05	-7.81	21.24	46.00	-24.76	QP
6	551.8600	28.52	-4.63	23.89	46.00	-22.11	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Phitek		
Test Engineer	Lucky Mao		

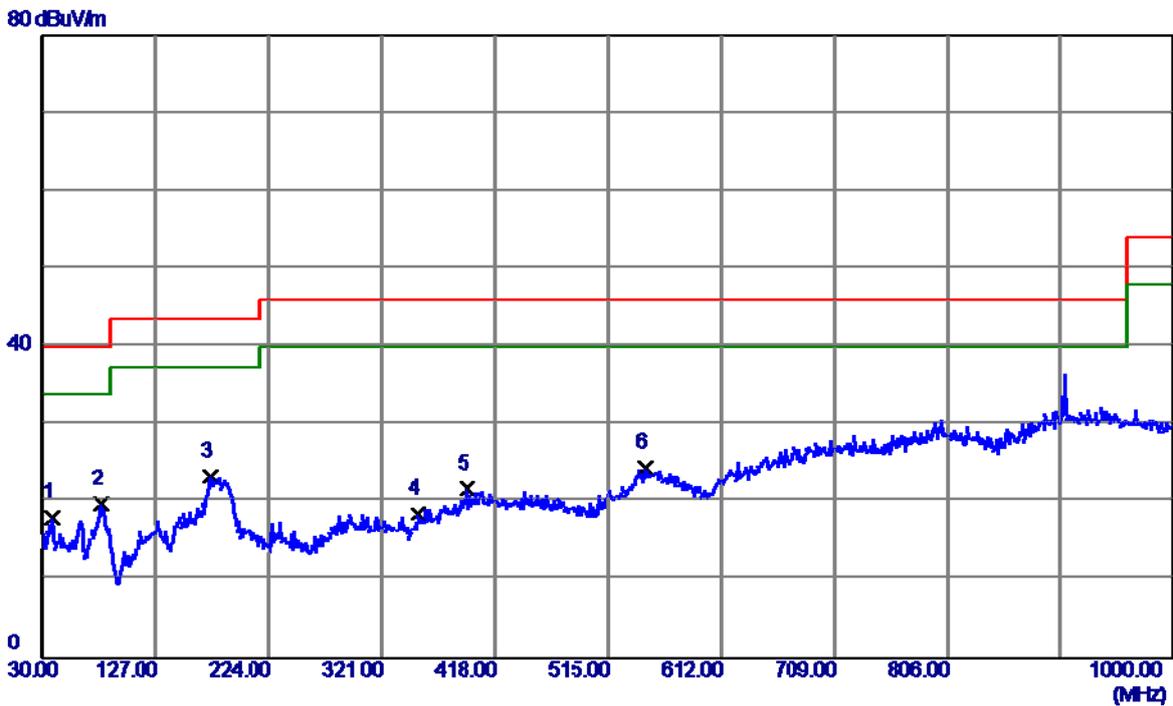


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	32.16	-14.06	18.10	40.00	-21.90	QP
2 *	80.4400	35.96	-16.16	19.80	40.00	-20.20	QP
3	174.5300	35.81	-12.51	23.30	43.50	-20.20	QP
4	352.0400	29.65	-11.08	18.57	46.00	-27.43	QP
5	394.7200	29.85	-8.14	21.71	46.00	-24.29	QP
6	547.0100	29.38	-4.85	24.53	46.00	-21.47	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+playing+speaker		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

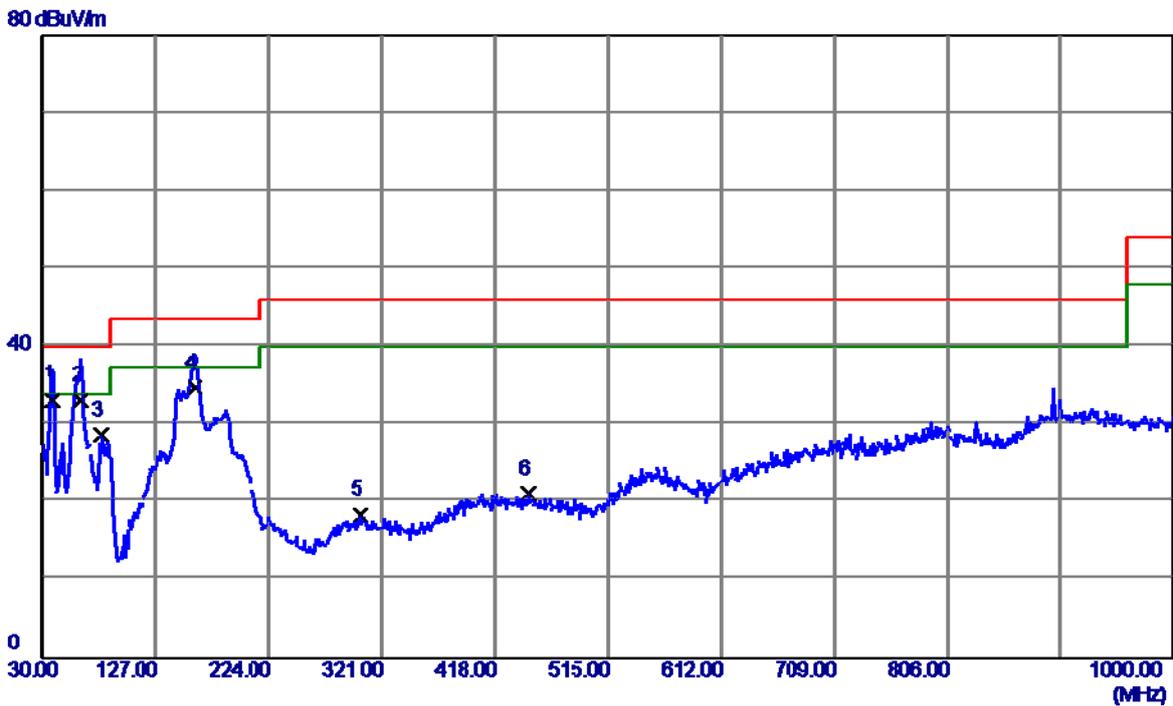


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	38.7300	47.26	-14.06	33.20	40.00	-6.80	QP
2	62.0100	47.40	-14.30	33.10	40.00	-6.90	QP
3	80.4400	44.86	-16.16	28.70	40.00	-11.30	QP
4	159.9800	46.85	-12.15	34.70	43.50	-8.80	QP
5	302.5700	28.57	-10.21	18.36	46.00	-27.64	QP
6	447.1000	29.12	-7.99	21.13	46.00	-24.87	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+playing+speaker		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

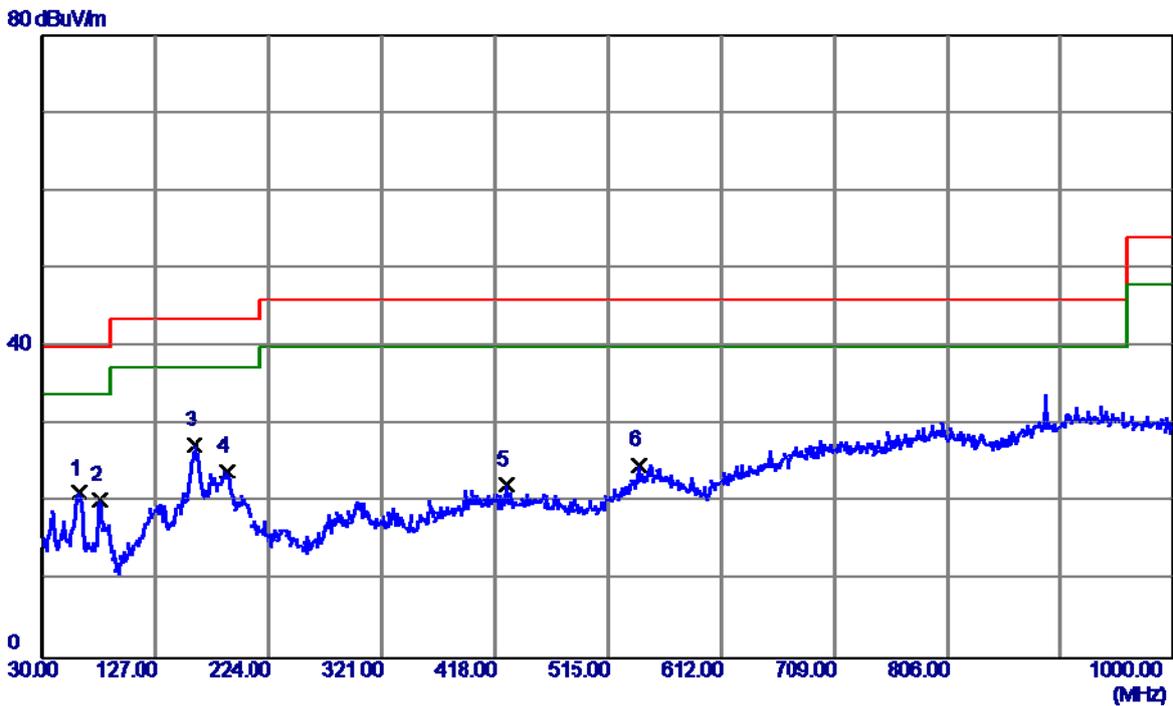


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	61.0400	35.22	-14.02	21.20	40.00	-18.80	QP
2	79.4700	36.45	-16.10	20.35	40.00	-19.65	QP
3 *	159.9800	39.44	-12.15	27.29	43.50	-16.21	QP
4	188.1100	37.77	-13.73	24.04	43.50	-19.46	QP
5	427.7000	30.09	-7.90	22.19	46.00	-23.81	QP
6	542.1599	30.15	-5.35	24.80	46.00	-21.20	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:BYD+Earphone:GoerTek		
Test Engineer	Lucky Mao		

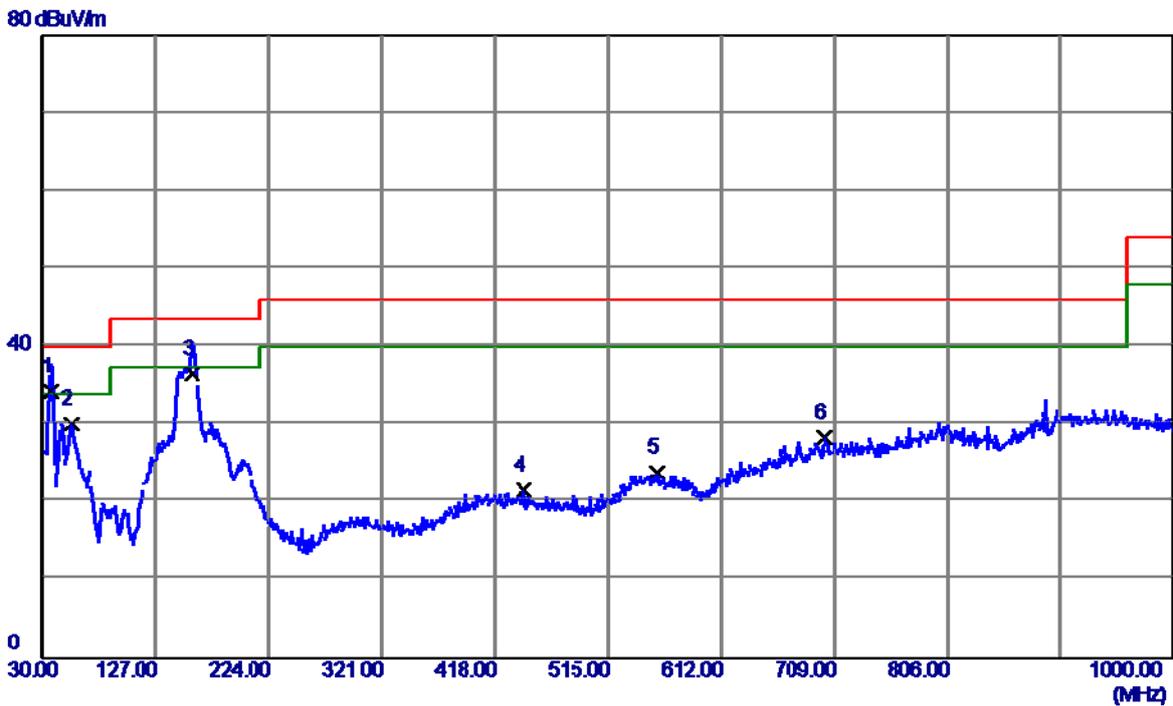


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	48.29	-14.09	34.20	40.00	-5.80	QP
2	54.2500	43.66	-13.53	30.13	40.00	-9.87	QP
3	158.0399	48.74	-12.30	36.44	43.50	-7.06	QP
4	443.2200	29.58	-7.97	21.61	46.00	-24.39	QP
5	556.7100	28.74	-4.88	23.86	46.00	-22.14	QP
6	700.2700	30.49	-2.10	28.39	46.00	-17.61	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:BYD+Earphone:GoerTek		
Test Engineer	Lucky Mao		

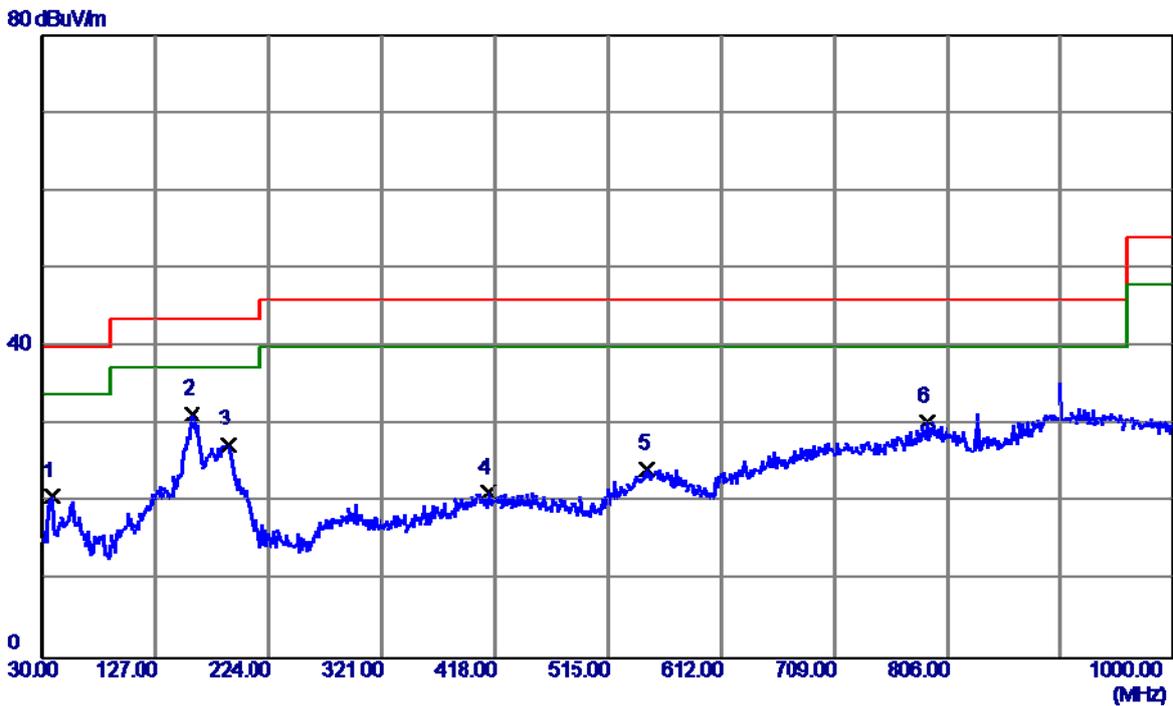


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	34.79	-14.06	20.73	40.00	-19.27	QP
2 *	158.0399	43.72	-12.30	31.42	43.50	-12.08	QP
3	189.0800	41.27	-13.83	27.44	43.50	-16.06	QP
4	412.1800	29.17	-7.83	21.34	46.00	-24.66	QP
5	548.9500	28.91	-4.65	24.26	46.00	-21.74	QP
6	788.5400	30.68	-0.25	30.43	46.00	-15.57	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:BYD+Earphone:Lianchuang		
Test Engineer	Lucky Mao		

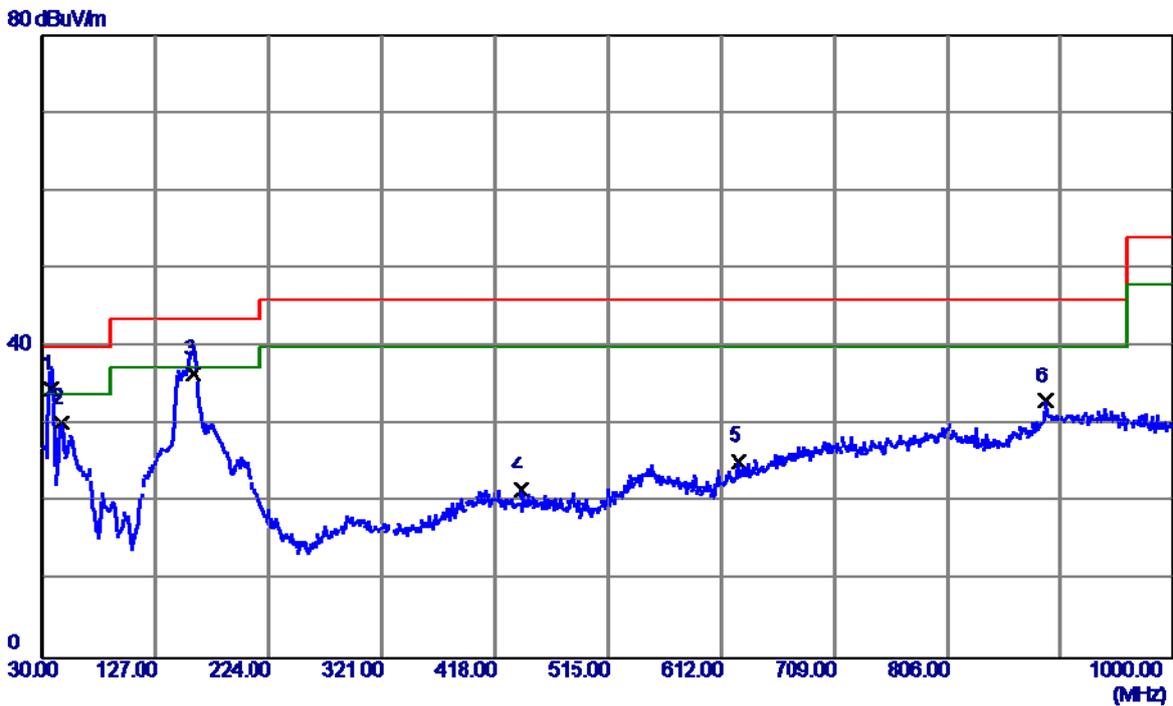


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	37.7599	48.60	-14.09	34.51	40.00	-5.49	QP
2	46.4900	42.77	-12.59	30.18	40.00	-9.82	QP
3	159.0100	48.70	-12.23	36.47	43.50	-7.03	QP
4	440.3100	29.49	-7.96	21.53	46.00	-24.47	QP
5	627.5200	30.71	-5.47	25.24	46.00	-20.76	QP
6	890.3900	31.15	1.89	33.04	46.00	-12.96	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:BYD+Earphone:Lianchuang		
Test Engineer	Lucky Mao		

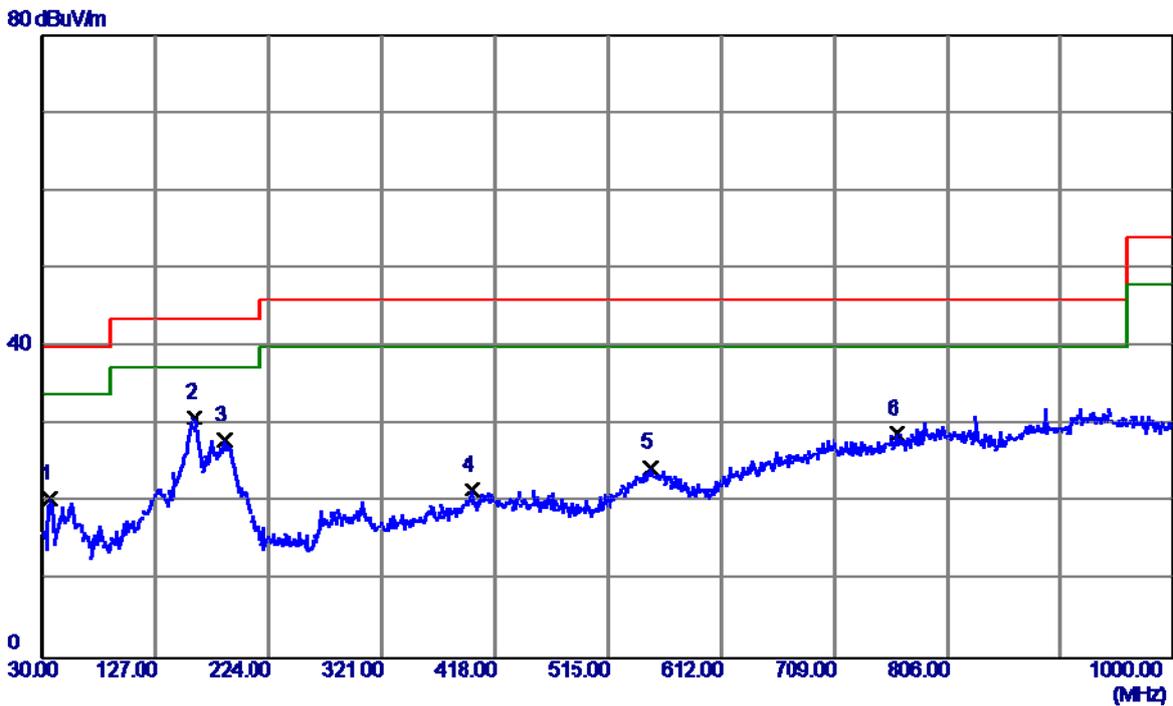


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	36.7900	34.37	-13.91	20.46	40.00	-19.54	QP
2 *	159.9800	43.08	-12.15	30.93	43.50	-12.57	QP
3	186.1700	41.45	-13.51	27.94	43.50	-15.56	QP
4	398.6000	29.54	-7.88	21.66	46.00	-24.34	QP
5	551.8600	29.05	-4.63	24.42	46.00	-21.58	QP
6	763.3200	30.25	-1.38	28.87	46.00	-17.13	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:BYD+Earphone:QUANCHENG		
Test Engineer	Lucky Mao		

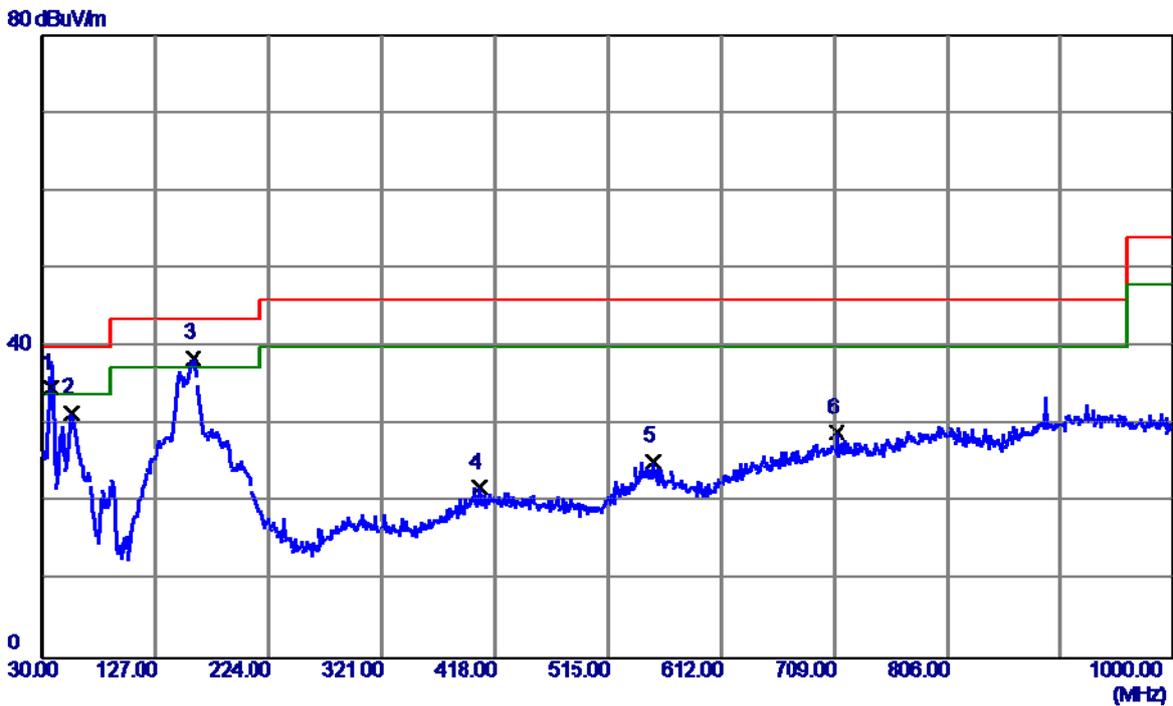


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	37.7599	48.74	-14.09	34.65	40.00	-5.35	QP
2	55.2200	44.97	-13.38	31.59	40.00	-8.41	QP
3 *	159.0100	50.85	-12.23	38.62	43.50	-4.88	QP
4	405.3900	29.78	-7.80	21.98	46.00	-24.02	QP
5	553.8000	30.04	-4.73	25.31	46.00	-20.69	QP
6	710.9400	30.96	-2.07	28.89	46.00	-17.11	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:BYD+Earphone:QUANCHENG		
Test Engineer	Lucky Mao		

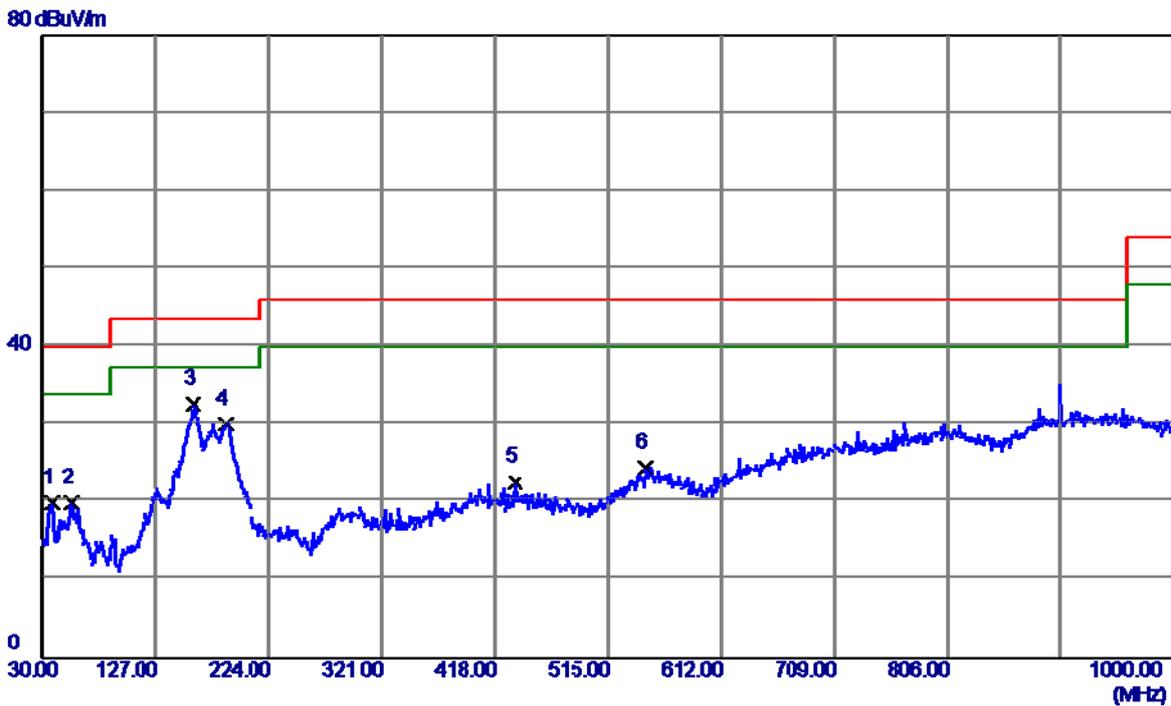


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	34.09	-14.06	20.03	40.00	-19.97	QP
2	55.2200	33.36	-13.38	19.98	40.00	-20.02	QP
3 *	159.0100	44.81	-12.23	32.58	43.50	-10.92	QP
4	187.1400	43.69	-13.62	30.07	43.50	-13.43	QP
5	435.4600	30.58	-7.94	22.64	46.00	-23.36	QP
6	547.0100	29.27	-4.85	24.42	46.00	-21.58	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

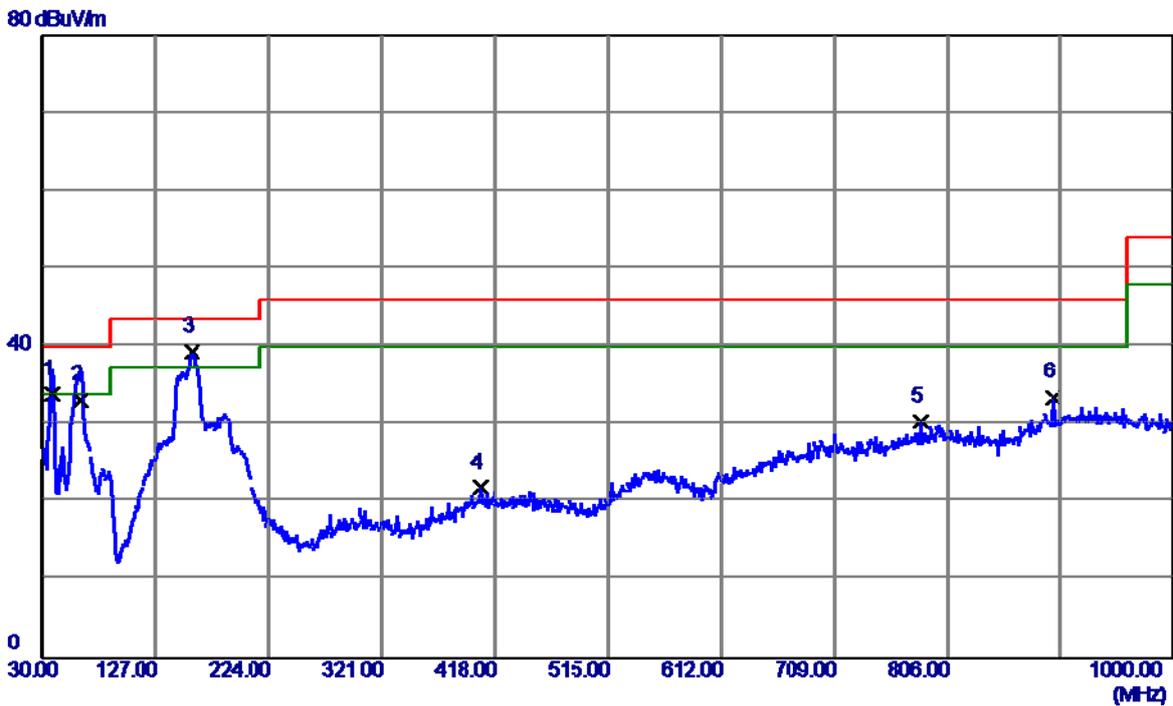


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	47.96	-14.06	33.90	40.00	-6.10	QP
2	62.0100	47.50	-14.30	33.20	40.00	-6.80	QP
3 *	158.0399	51.73	-12.30	39.43	43.50	-4.07	QP
4	406.3599	29.66	-7.81	21.85	46.00	-24.15	QP
5	783.6900	30.94	-0.47	30.47	46.00	-15.53	QP
6	896.2100	31.17	2.35	33.52	46.00	-12.48	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

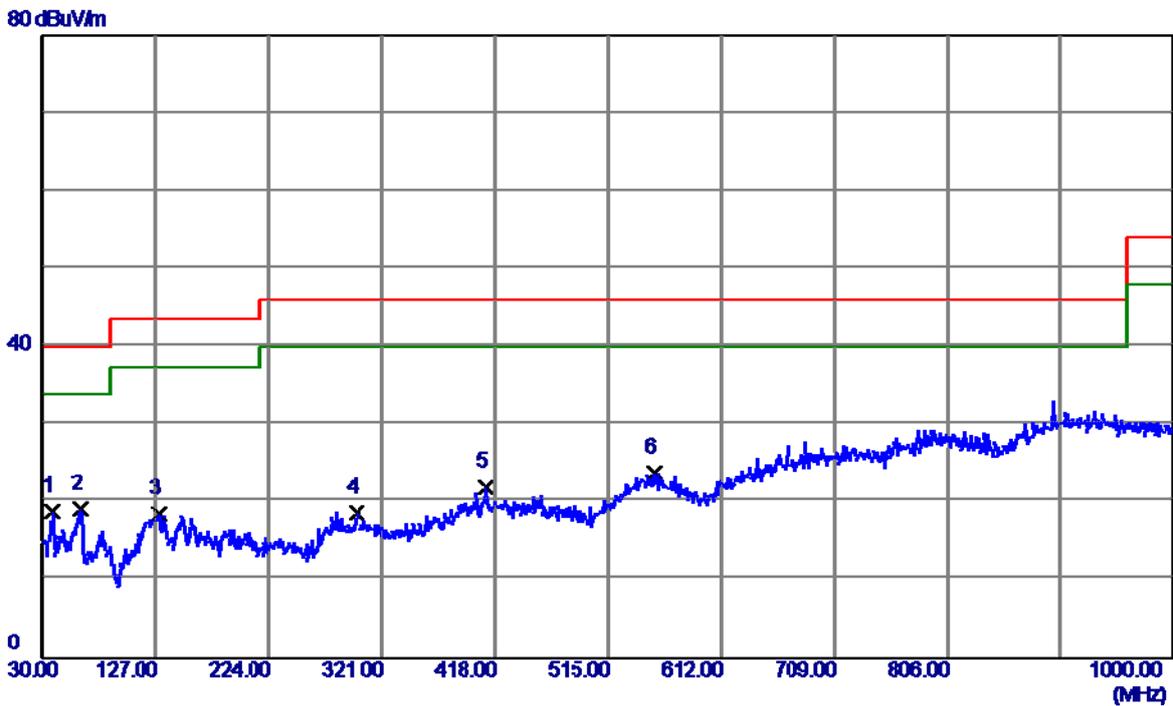


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	32.98	-14.06	18.92	40.00	-21.08	QP
2 *	62.0100	33.48	-14.30	19.18	40.00	-20.82	QP
3	129.9100	30.92	-12.36	18.56	43.50	-24.94	QP
4	299.6600	28.90	-10.20	18.70	46.00	-27.30	QP
5	410.2400	29.83	-7.83	22.00	46.00	-24.00	QP
6	554.7700	28.55	-4.78	23.77	46.00	-22.23	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

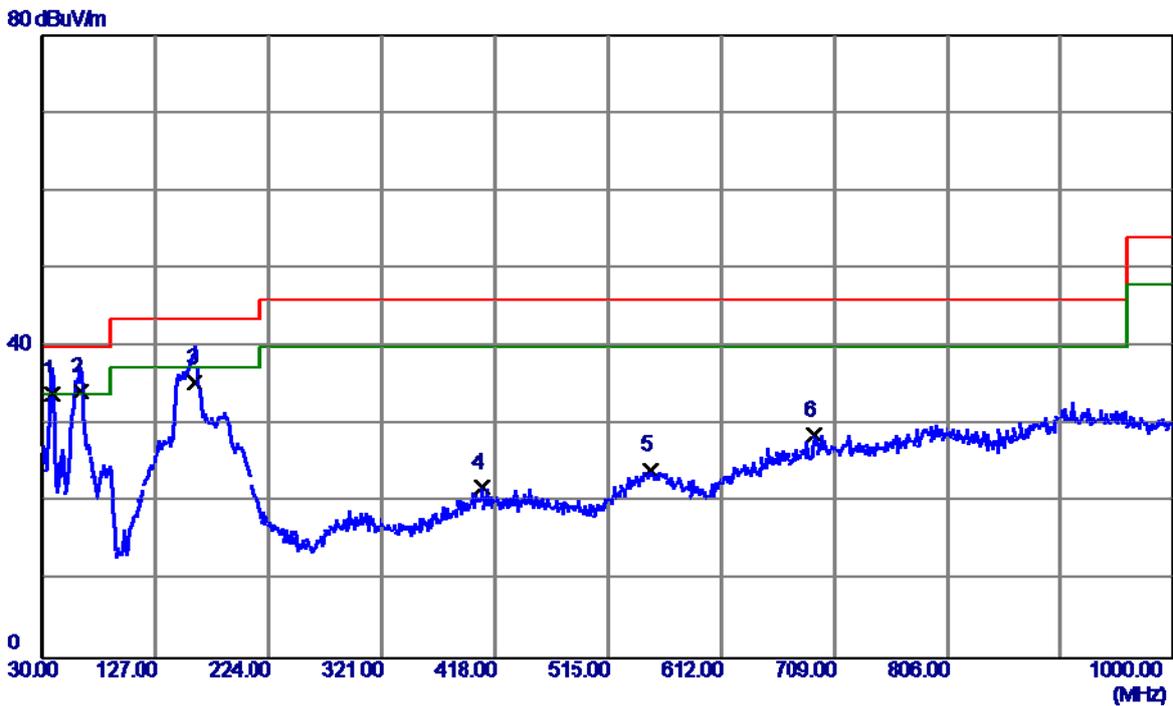


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	47.96	-14.06	33.90	40.00	-6.10	QP
2 *	62.0100	48.50	-14.30	34.20	40.00	-5.80	QP
3	160.9500	47.57	-12.16	35.41	43.50	-8.09	QP
4	407.3299	29.80	-7.81	21.99	46.00	-24.01	QP
5	551.8600	28.77	-4.63	24.14	46.00	-21.86	QP
6	691.5400	31.09	-2.45	28.64	46.00	-17.36	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

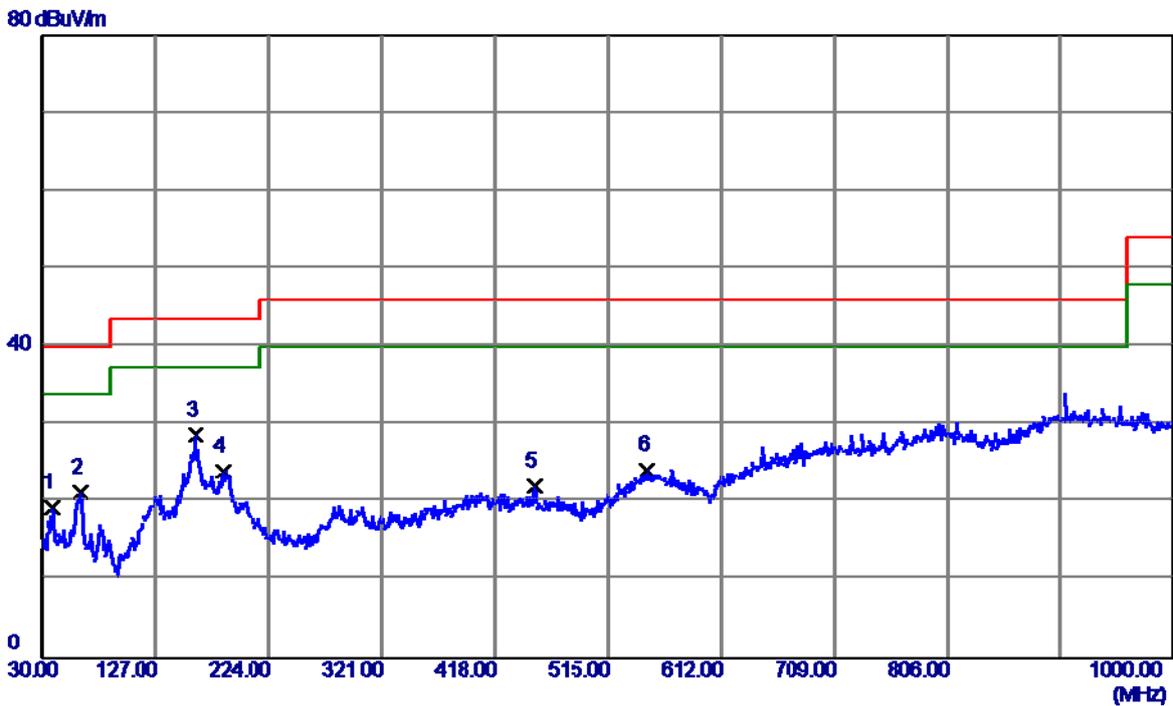


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	33.47	-14.06	19.41	40.00	-20.59	QP
2	62.0100	35.54	-14.30	21.24	40.00	-18.76	QP
3 *	161.9200	40.84	-12.16	28.68	43.50	-14.82	QP
4	185.2000	37.36	-13.41	23.95	43.50	-19.55	QP
5	452.9200	30.14	-8.10	22.04	46.00	-23.96	QP
6	548.9500	28.78	-4.65	24.13	46.00	-21.87	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

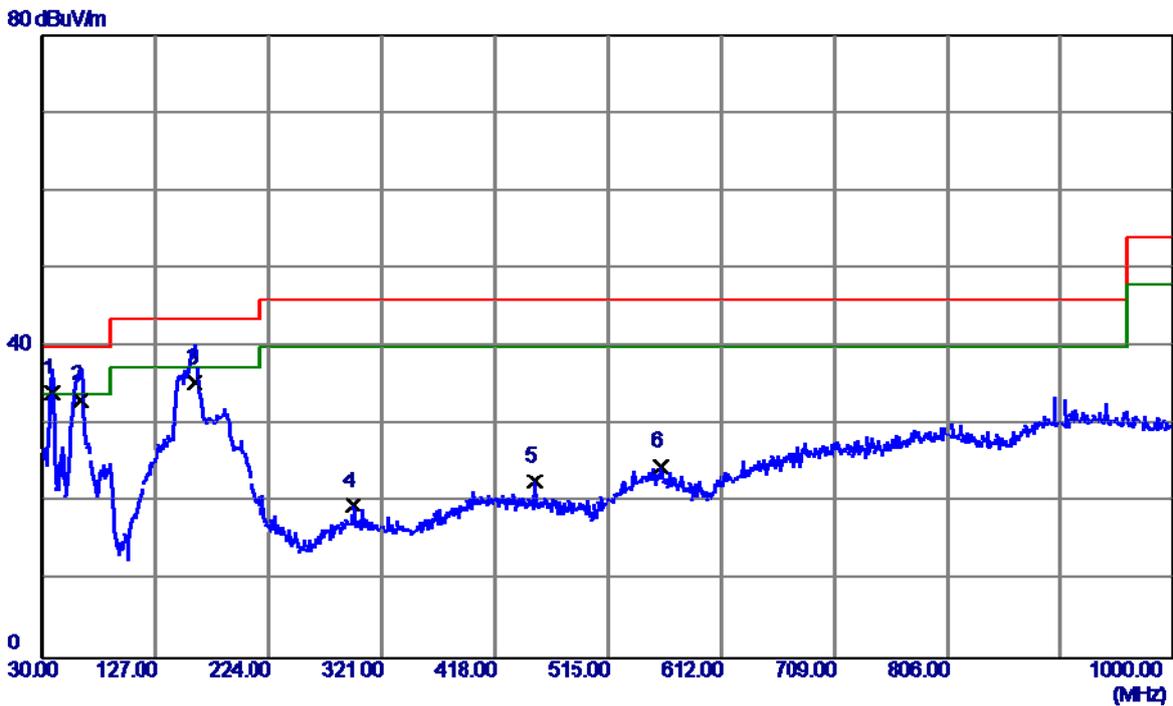

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	38.7300	48.16	-14.06	34.10	40.00	-5.90	QP
2	62.0100	47.50	-14.30	33.20	40.00	-6.80	QP
3	160.9500	47.56	-12.16	35.40	43.50	-8.10	QP
4	295.7800	30.22	-10.62	19.60	46.00	-26.40	QP
5	452.9200	30.84	-8.10	22.74	46.00	-23.26	QP
6	560.5900	29.75	-5.07	24.68	46.00	-21.32	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

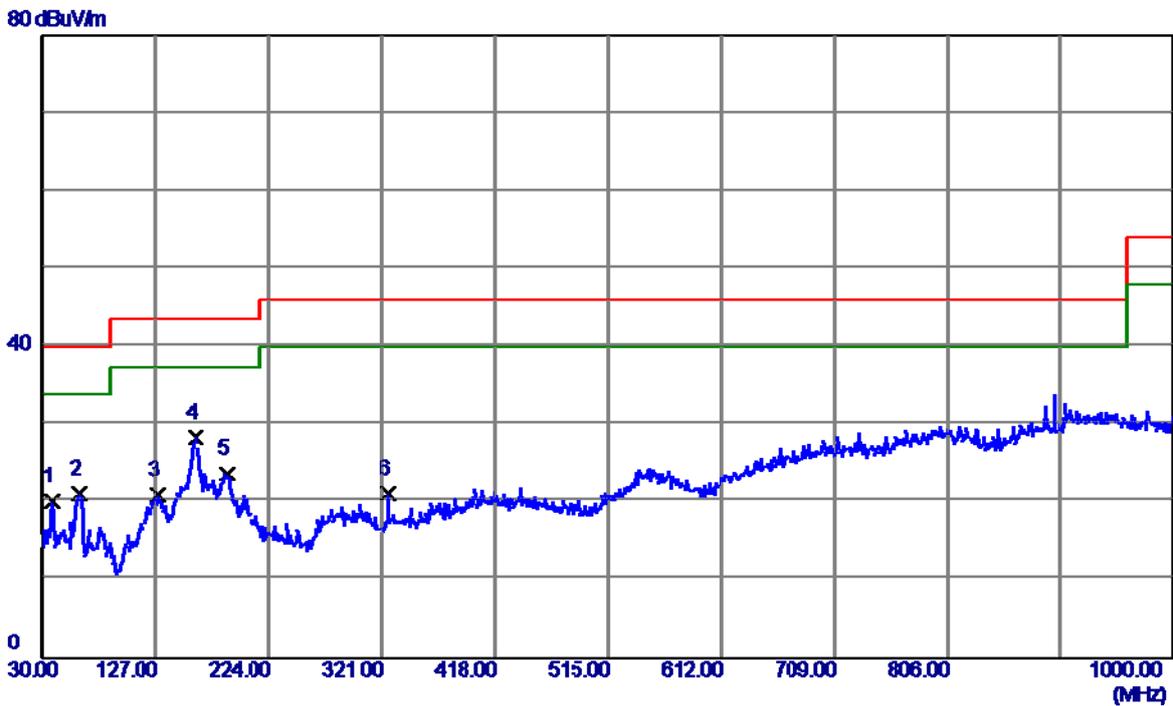


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	38.7300	34.20	-14.06	20.14	40.00	-19.86	QP
2	61.0400	35.07	-14.02	21.05	40.00	-18.95	QP
3	128.9400	33.44	-12.47	20.97	43.50	-22.53	QP
4 *	161.9200	40.45	-12.16	28.29	43.50	-15.21	QP
5	188.1100	37.45	-13.73	23.72	43.50	-19.78	QP
6	325.8500	31.82	-10.71	21.11	46.00	-24.89	QP

4.2.8 TEST RESULTS-ABOVE 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『 Note 』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		

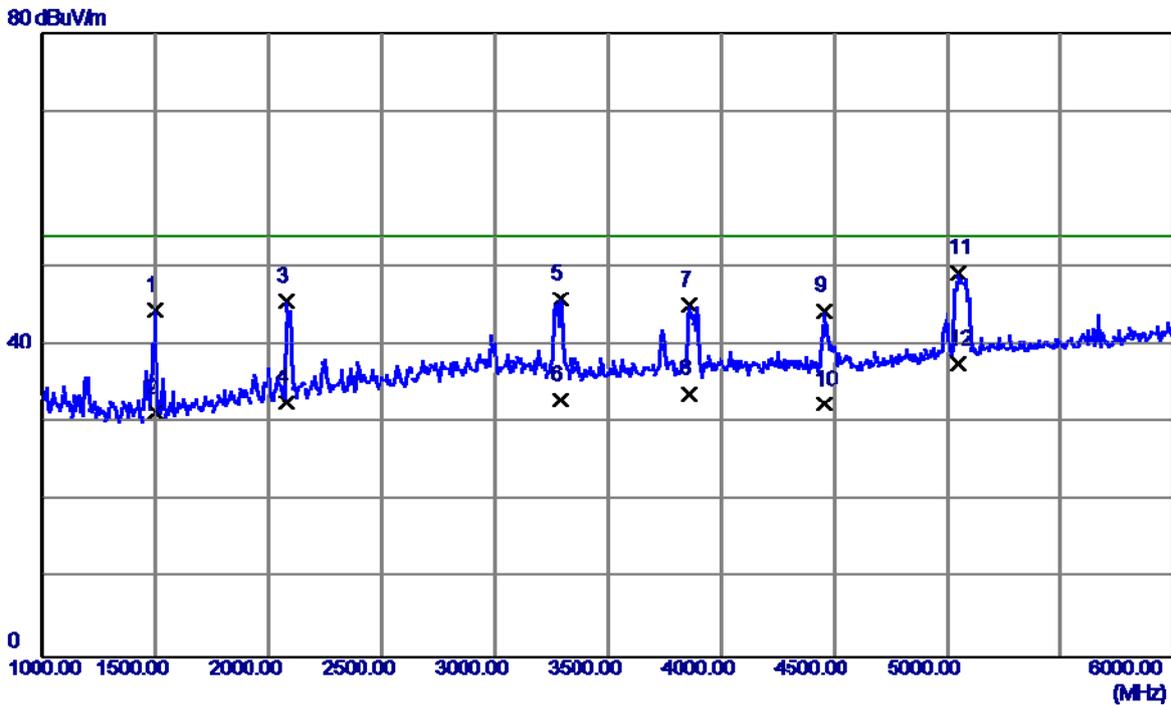


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	51.19	-6.65	44.54	74.00	-29.46	Peak
2	1500.0000	38.05	-6.65	31.40	54.00	-22.60	AVG
3	2080.0000	48.12	-2.52	45.60	74.00	-28.40	Peak
4	2080.0000	35.22	-2.52	32.70	54.00	-21.30	AVG
5	3290.0000	44.50	1.41	45.91	74.00	-28.09	Peak
6	3290.0000	31.49	1.41	32.90	54.00	-21.10	AVG
7	3860.0000	42.70	2.49	45.19	74.00	-28.81	Peak
8	3860.0000	31.31	2.49	33.80	54.00	-20.20	AVG
9	4455.0000	40.97	3.43	44.40	74.00	-29.60	Peak
10	4455.0000	28.97	3.43	32.40	54.00	-21.60	AVG
11	5050.0000	43.48	5.76	49.24	74.00	-24.76	Peak
12 *	5050.0000	31.84	5.76	37.60	54.00	-16.40	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		

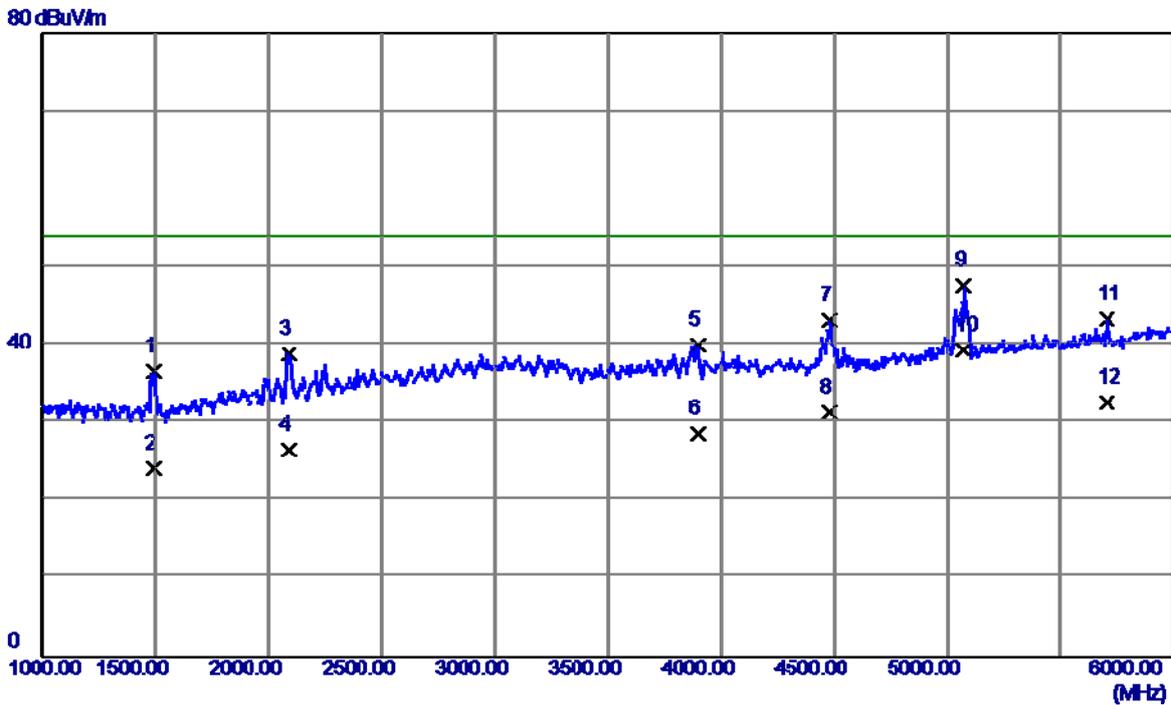


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	43.27	-6.66	36.61	74.00	-37.39	Peak
2	1495.0000	30.76	-6.66	24.10	54.00	-29.90	AVG
3	2090.0000	41.44	-2.49	38.95	74.00	-35.05	Peak
4	2090.0000	28.99	-2.49	26.50	54.00	-27.50	AVG
5	3900.0000	37.43	2.62	40.05	74.00	-33.95	Peak
6	3900.0000	26.08	2.62	28.70	54.00	-25.30	AVG
7	4480.0000	39.68	3.46	43.14	74.00	-30.86	Peak
8	4480.0000	27.94	3.46	31.40	54.00	-22.60	AVG
9	5075.0000	41.91	5.84	47.75	74.00	-26.25	Peak
10 *	5075.0000	33.46	5.84	39.30	54.00	-14.70	AVG
11	5705.0000	35.39	7.95	43.34	74.00	-30.66	Peak
12	5705.0000	24.65	7.95	32.60	54.00	-21.40	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:HONGLIN		
Test Engineer	Lucky Mao		

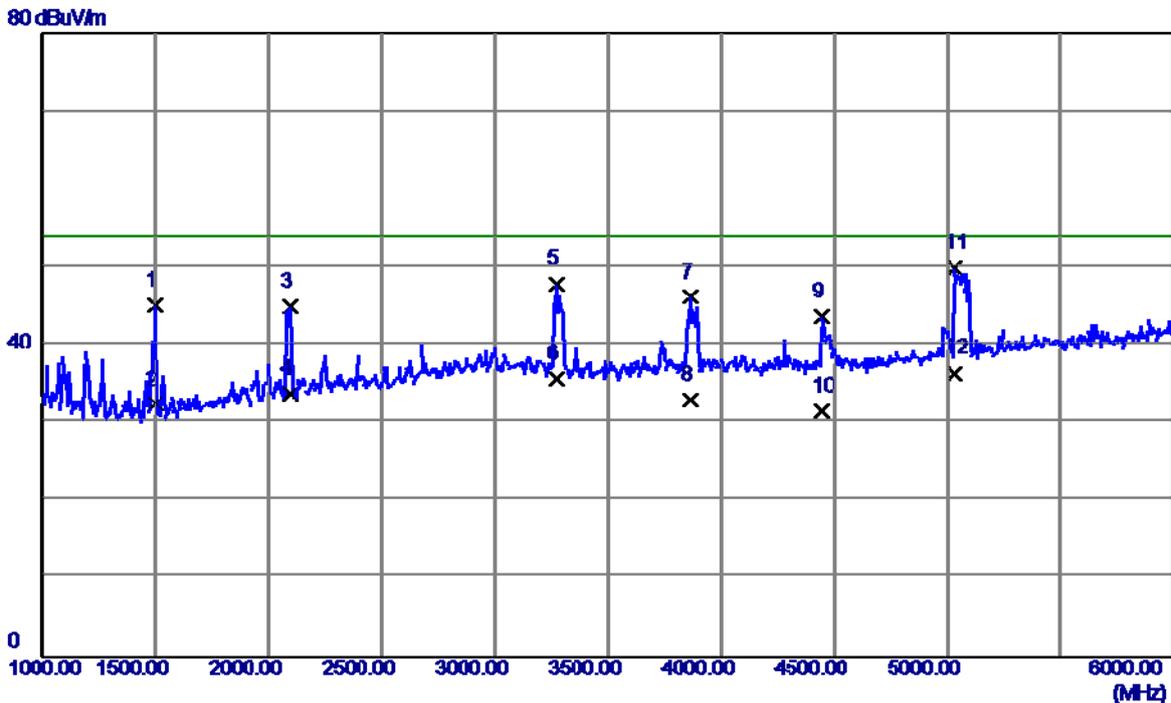


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	51.83	-6.65	45.18	74.00	-28.82	Peak
2	1500.0000	39.05	-6.65	32.40	54.00	-21.60	AVG
3	2095.0000	47.38	-2.47	44.91	74.00	-29.09	Peak
4	2095.0000	36.27	-2.47	33.80	54.00	-20.20	AVG
5	3270.0000	46.47	1.41	47.88	74.00	-26.12	Peak
6	3270.0000	34.29	1.41	35.70	54.00	-18.30	AVG
7	3865.0000	43.65	2.51	46.16	74.00	-27.84	Peak
8	3865.0000	30.39	2.51	32.90	54.00	-21.10	AVG
9	4445.0000	40.32	3.42	43.74	74.00	-30.26	Peak
10	4445.0000	28.08	3.42	31.50	54.00	-22.50	AVG
11	5035.0000	44.13	5.71	49.84	74.00	-24.16	Peak
12 *	5035.0000	30.69	5.71	36.40	54.00	-17.60	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:HONGLIN		
Test Engineer	Lucky Mao		

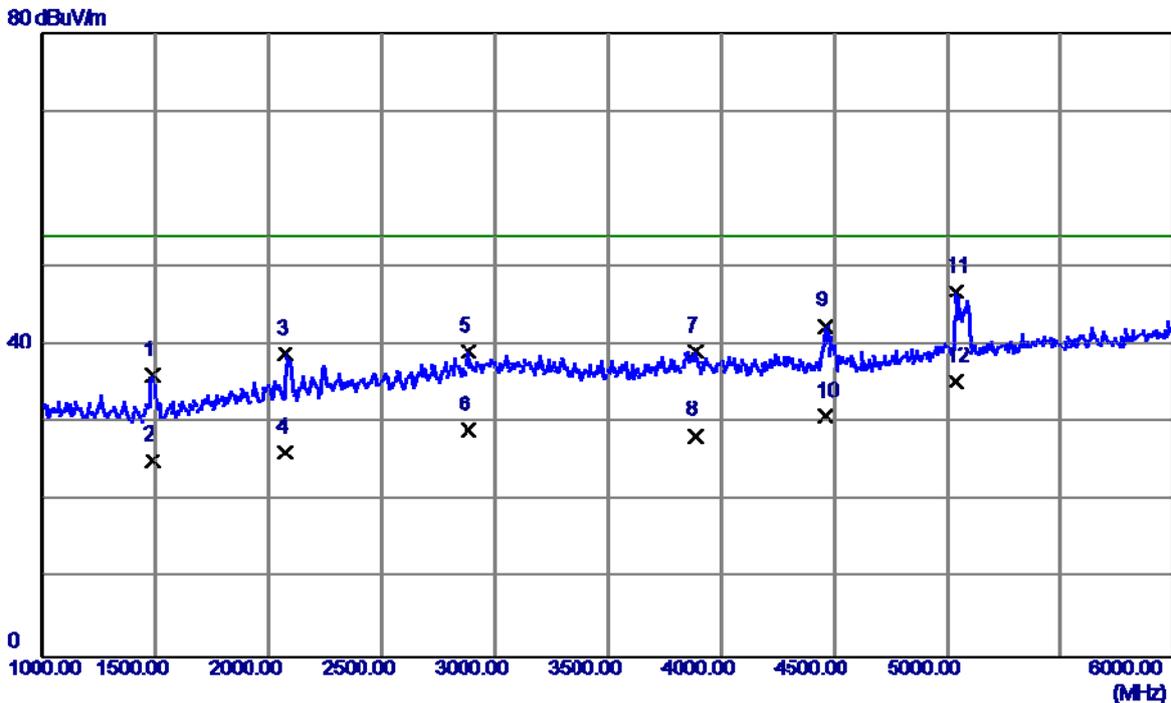


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1490.0000	42.82	-6.68	36.14	74.00	-37.86	Peak
2	1490.0000	31.88	-6.68	25.20	54.00	-28.80	AVG
3	2075.0000	41.48	-2.54	38.94	74.00	-35.06	Peak
4	2075.0000	28.84	-2.54	26.30	54.00	-27.70	AVG
5	2885.0000	38.22	0.95	39.17	74.00	-34.83	Peak
6	2885.0000	28.15	0.95	29.10	54.00	-24.90	AVG
7	3890.0000	36.62	2.59	39.21	74.00	-34.79	Peak
8	3890.0000	25.81	2.59	28.40	54.00	-25.60	AVG
9	4460.0000	39.04	3.44	42.48	74.00	-31.52	Peak
10	4460.0000	27.46	3.44	30.90	54.00	-23.10	AVG
11	5040.0000	41.11	5.73	46.84	74.00	-27.16	Peak
12 *	5040.0000	29.67	5.73	35.40	54.00	-18.60	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		

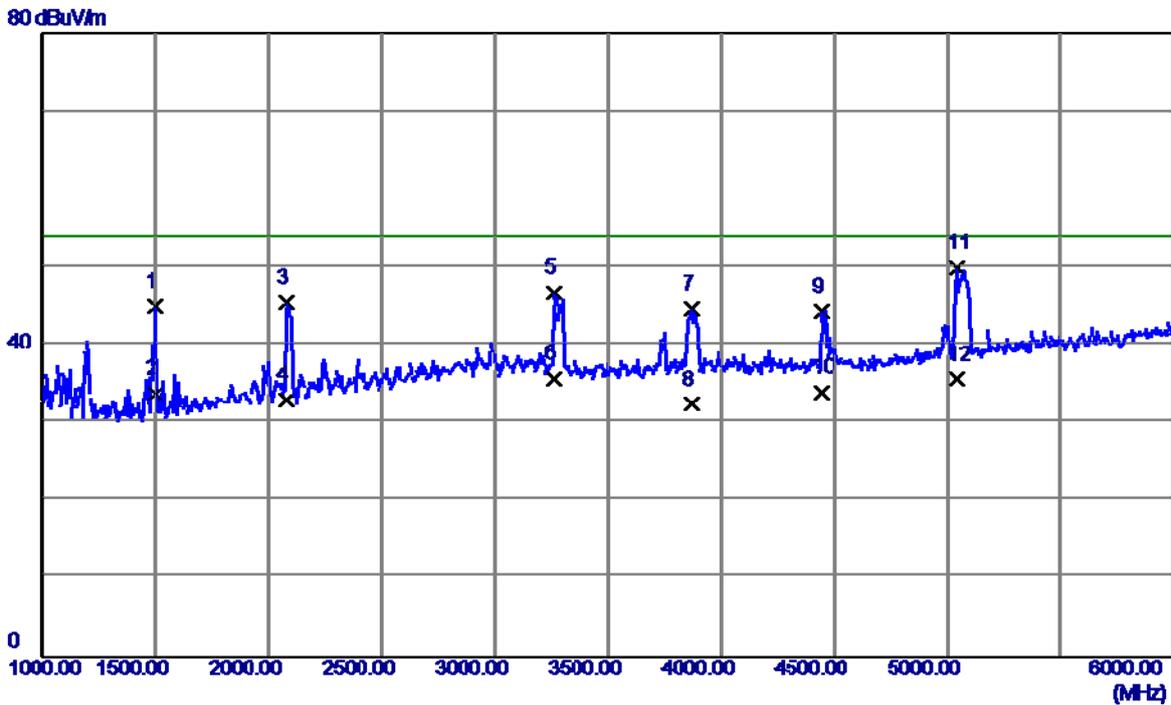


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	51.62	-6.65	44.97	74.00	-29.03	Peak
2	1500.0000	40.45	-6.65	33.80	54.00	-20.20	AVG
3	2080.0000	47.91	-2.52	45.39	74.00	-28.61	Peak
4	2080.0000	35.42	-2.52	32.90	54.00	-21.10	AVG
5	3260.0000	45.33	1.42	46.75	74.00	-27.25	Peak
6 *	3260.0000	34.28	1.42	35.70	54.00	-18.30	AVG
7	3870.0000	42.16	2.52	44.68	74.00	-29.32	Peak
8	3870.0000	29.88	2.52	32.40	54.00	-21.60	AVG
9	4445.0000	40.84	3.42	44.26	74.00	-29.74	Peak
10	4445.0000	30.48	3.42	33.90	54.00	-20.10	AVG
11	5045.0000	44.18	5.75	49.93	74.00	-24.07	Peak
12	5045.0000	29.85	5.75	35.60	54.00	-18.40	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		

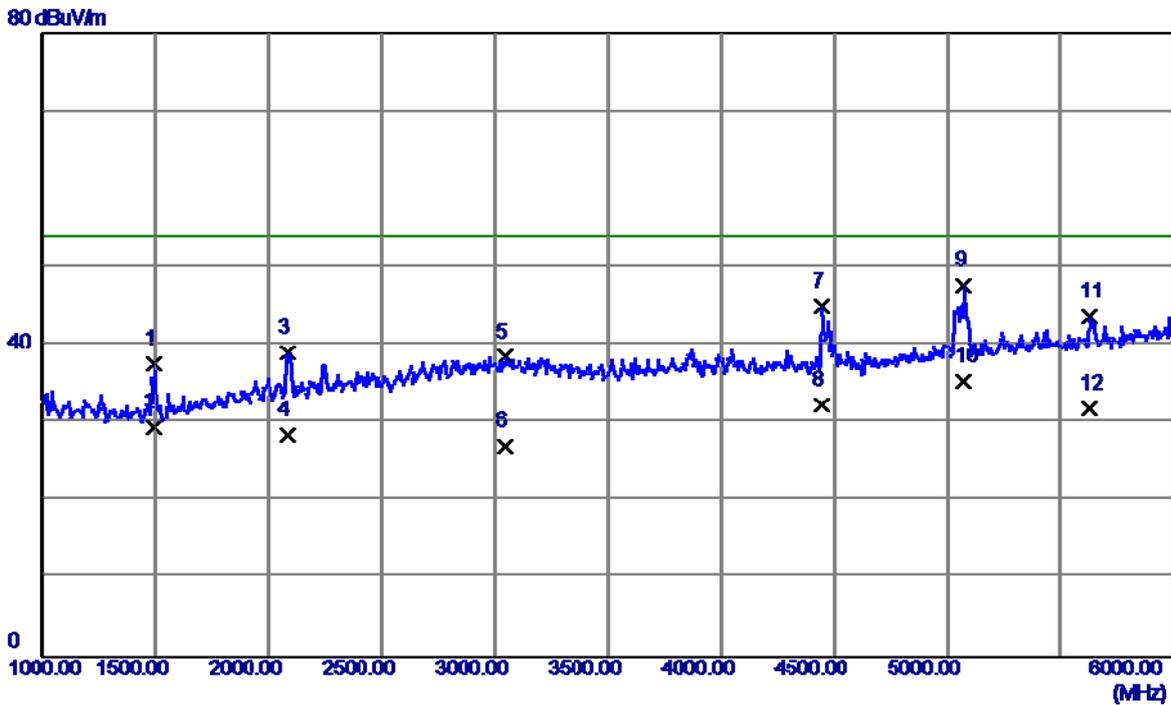


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	44.22	-6.66	37.56	74.00	-36.44	Peak
2	1495.0000	36.06	-6.66	29.40	54.00	-24.60	AVG
3	2085.0000	41.57	-2.51	39.06	74.00	-34.94	Peak
4	2085.0000	31.01	-2.51	28.50	54.00	-25.50	AVG
5	3045.0000	36.97	1.51	38.48	74.00	-35.52	Peak
6	3045.0000	25.59	1.51	27.10	54.00	-26.90	AVG
7	4445.0000	41.52	3.42	44.94	74.00	-29.06	Peak
8	4445.0000	28.88	3.42	32.30	54.00	-21.70	AVG
9	5075.0000	41.83	5.84	47.67	74.00	-26.33	Peak
10 *	5075.0000	29.56	5.84	35.40	54.00	-18.60	AVG
11	5630.0000	36.03	7.69	43.72	74.00	-30.28	Peak
12	5630.0000	24.21	7.69	31.90	54.00	-22.10	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

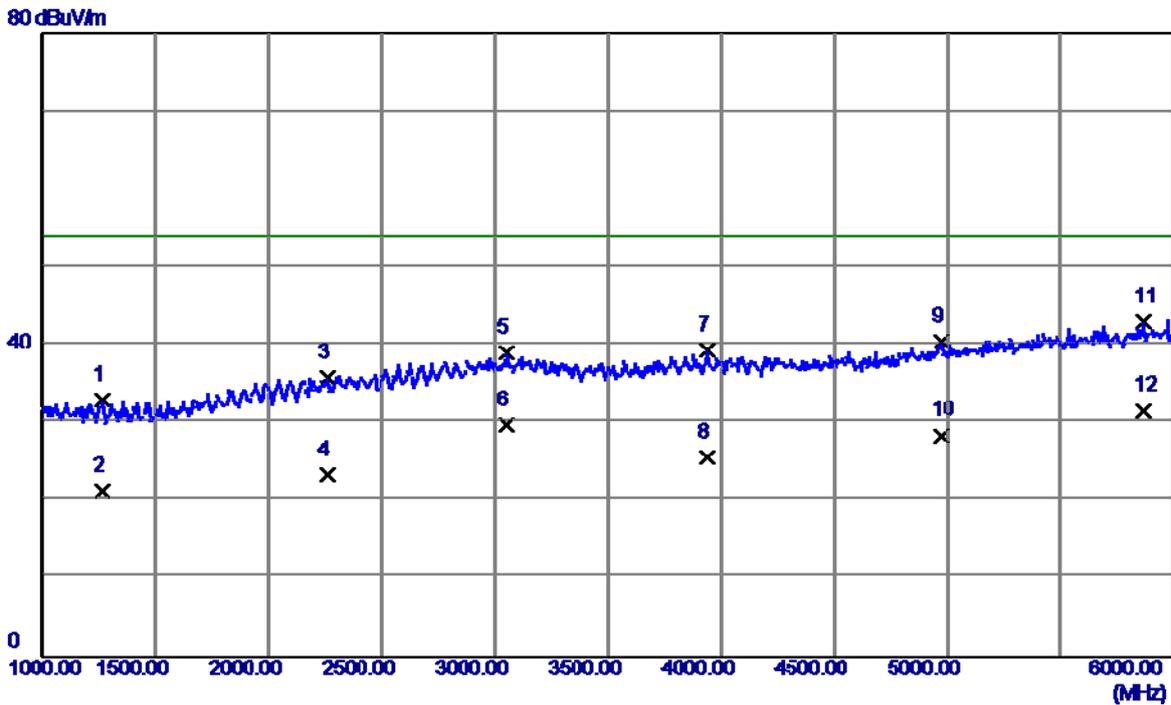


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1265.0000	40.27	-7.25	33.02	74.00	-40.98	Peak
2	1265.0000	28.55	-7.25	21.30	54.00	-32.70	AVG
3	2260.0000	37.69	-1.86	35.83	74.00	-38.17	Peak
4	2260.0000	25.26	-1.86	23.40	54.00	-30.60	AVG
5	3050.0000	37.57	1.51	39.08	74.00	-34.92	Peak
6	3050.0000	28.29	1.51	29.80	54.00	-24.20	AVG
7	3940.0000	36.55	2.75	39.30	74.00	-34.70	Peak
8	3940.0000	22.85	2.75	25.60	54.00	-28.40	AVG
9	4970.0000	35.03	5.47	40.50	74.00	-33.50	Peak
10	4970.0000	22.93	5.47	28.40	54.00	-25.60	AVG
11	5865.0000	34.60	8.51	43.11	74.00	-30.89	Peak
12 *	5865.0000	23.09	8.51	31.60	54.00	-22.40	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:BYD		
Test Engineer	Lucky Mao		

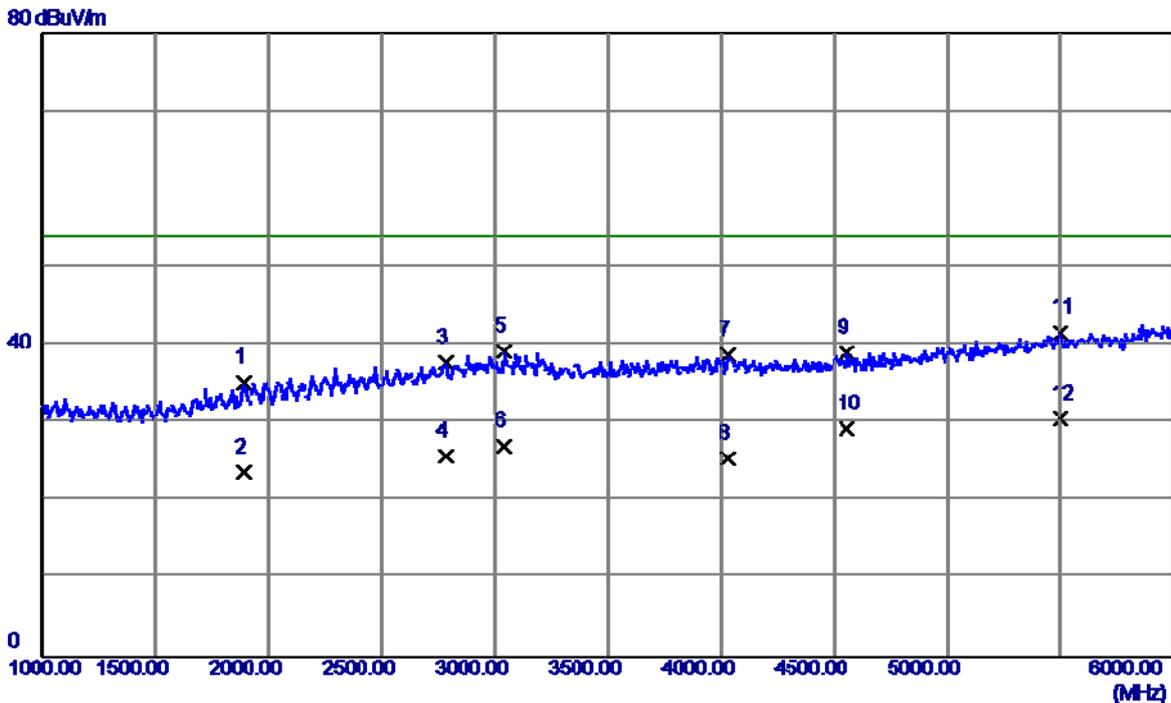


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1890.0000	38.83	-3.66	35.17	74.00	-38.83	Peak
2	1890.0000	27.36	-3.66	23.70	54.00	-30.30	AVG
3	2785.0000	37.26	0.45	37.71	74.00	-36.29	Peak
4	2785.0000	25.35	0.45	25.80	54.00	-28.20	AVG
5	3040.0000	37.75	1.51	39.26	74.00	-34.74	Peak
6	3040.0000	25.59	1.51	27.10	54.00	-26.90	AVG
7	4030.0000	35.73	2.98	38.71	74.00	-35.29	Peak
8	4030.0000	22.42	2.98	25.40	54.00	-28.60	AVG
9	4555.0000	35.36	3.71	39.07	74.00	-34.93	Peak
10	4555.0000	25.59	3.71	29.30	54.00	-24.70	AVG
11	5500.0000	34.34	7.23	41.57	74.00	-32.43	Peak
12 *	5500.0000	23.37	7.23	30.60	54.00	-23.40	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

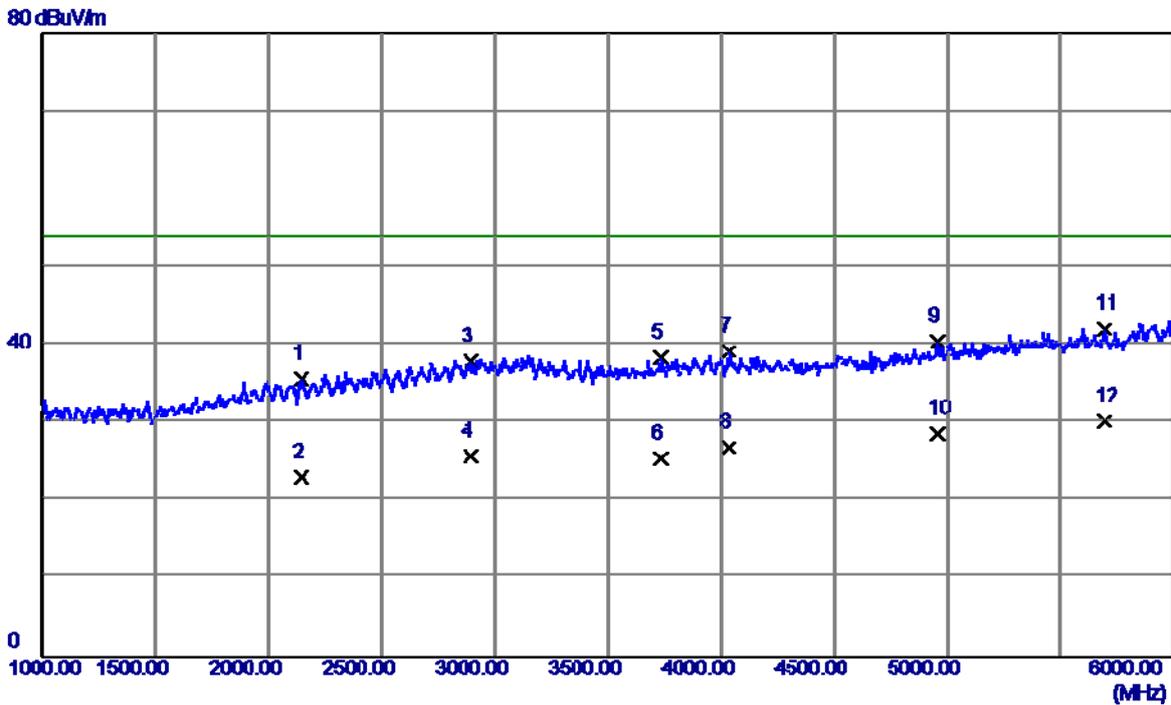


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2145.0000	38.01	-2.28	35.73	74.00	-38.27	Peak
2	2145.0000	25.38	-2.28	23.10	54.00	-30.90	AVG
3	2895.0000	36.94	1.00	37.94	74.00	-36.06	Peak
4	2895.0000	24.80	1.00	25.80	54.00	-28.20	AVG
5	3735.0000	36.34	2.08	38.42	74.00	-35.58	Peak
6	3735.0000	23.32	2.08	25.40	54.00	-28.60	AVG
7	4035.0000	36.19	2.99	39.18	74.00	-34.82	Peak
8	4035.0000	23.91	2.99	26.90	54.00	-27.10	AVG
9	4955.0000	35.02	5.41	40.43	74.00	-33.57	Peak
10	4955.0000	23.29	5.41	28.70	54.00	-25.30	AVG
11	5695.0000	34.14	7.92	42.06	74.00	-31.94	Peak
12 *	5695.0000	22.28	7.92	30.20	54.00	-23.80	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

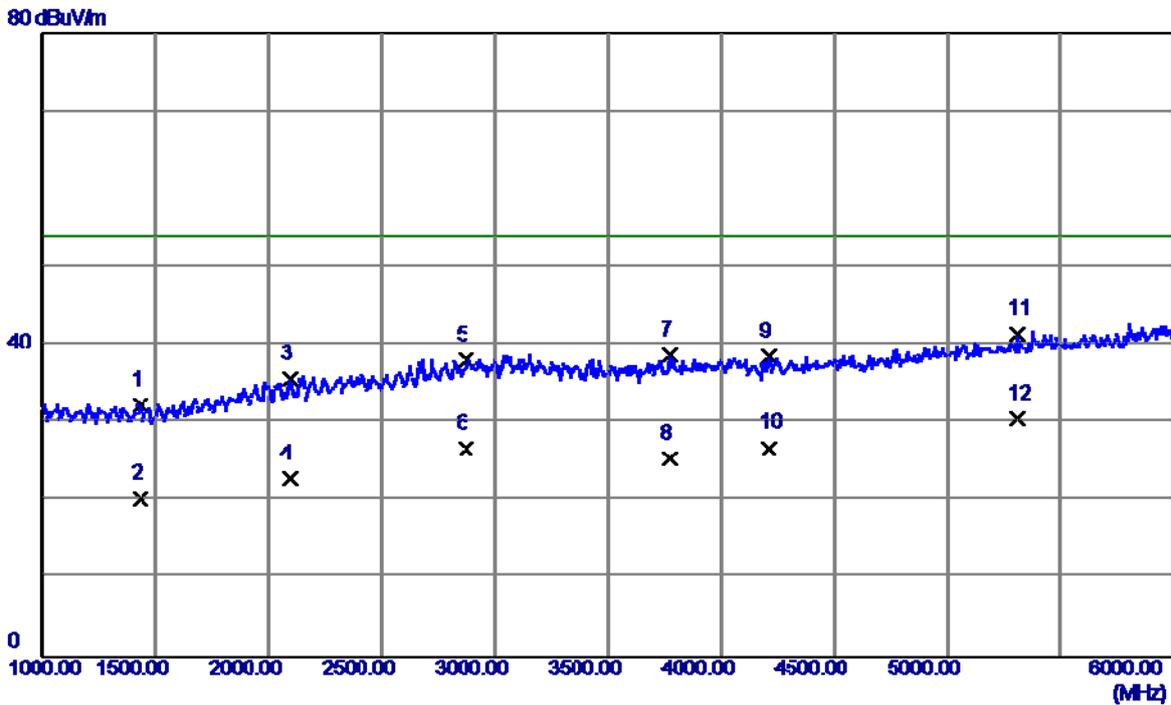


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1435.0000	39.19	-6.82	32.37	74.00	-41.63	Peak
2	1435.0000	27.12	-6.82	20.30	54.00	-33.70	AVG
3	2095.0000	38.13	-2.47	35.66	74.00	-38.34	Peak
4	2095.0000	25.37	-2.47	22.90	54.00	-31.10	AVG
5	2870.0000	37.18	0.88	38.06	74.00	-35.94	Peak
6	2870.0000	25.82	0.88	26.70	54.00	-27.30	AVG
7	3770.0000	36.58	2.20	38.78	74.00	-35.22	Peak
8	3770.0000	23.20	2.20	25.40	54.00	-28.60	AVG
9	4210.0000	35.39	3.17	38.56	74.00	-35.44	Peak
10	4210.0000	23.63	3.17	26.80	54.00	-27.20	AVG
11	5310.0000	34.90	6.61	41.51	74.00	-32.49	Peak
12 *	5310.0000	23.89	6.61	30.50	54.00	-23.50	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Phitek		
Test Engineer	Lucky Mao		

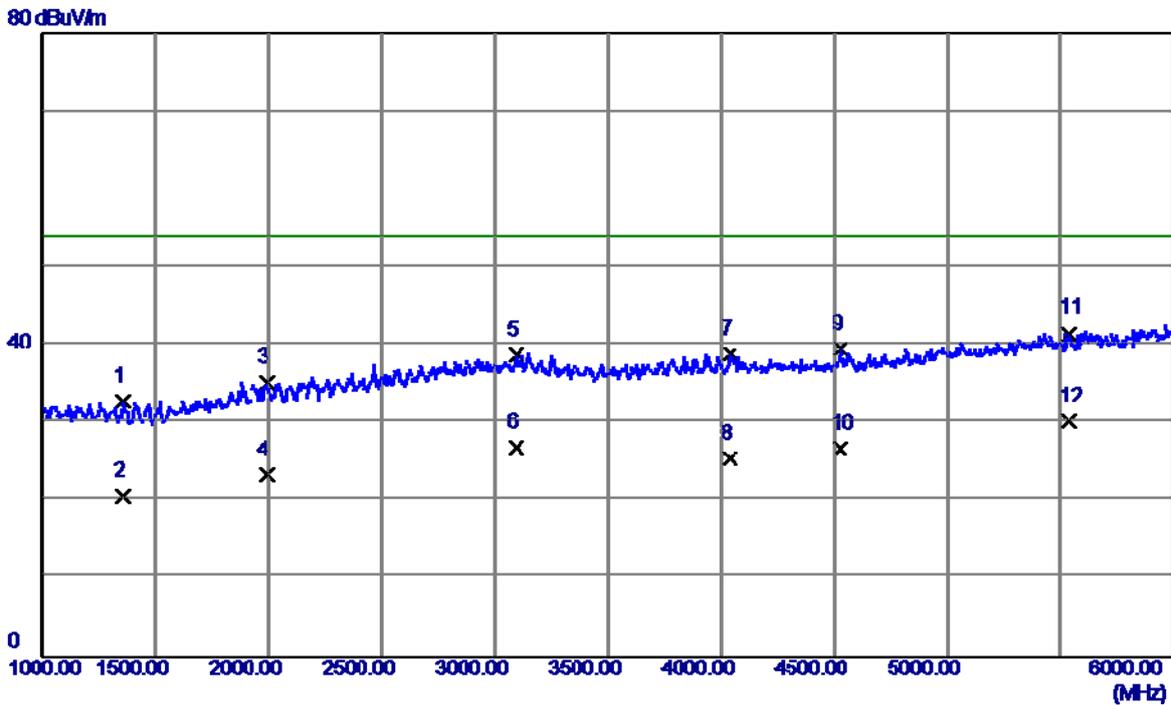


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1355.0000	39.85	-7.02	32.83	74.00	-41.17	Peak
2	1355.0000	27.72	-7.02	20.70	54.00	-33.30	AVG
3	1995.0000	38.00	-2.86	35.14	74.00	-38.86	Peak
4	1995.0000	26.16	-2.86	23.30	54.00	-30.70	AVG
5	3095.0000	37.27	1.49	38.76	74.00	-35.24	Peak
6	3095.0000	25.41	1.49	26.90	54.00	-27.10	AVG
7	4040.0000	35.87	2.99	38.86	74.00	-35.14	Peak
8	4040.0000	22.41	2.99	25.40	54.00	-28.60	AVG
9	4530.0000	35.92	3.61	39.53	74.00	-34.47	Peak
10	4530.0000	23.09	3.61	26.70	54.00	-27.30	AVG
11	5540.0000	34.15	7.37	41.52	74.00	-32.48	Peak
12 *	5540.0000	22.83	7.37	30.20	54.00	-23.80	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Phitek		
Test Engineer	Lucky Mao		

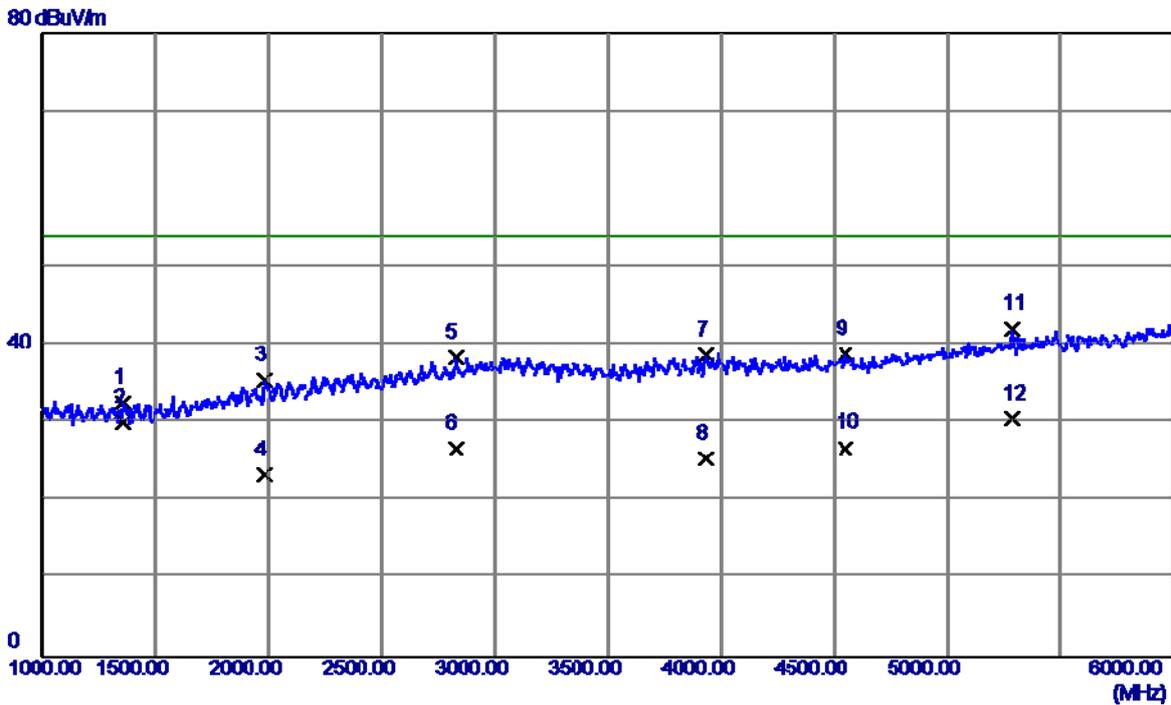


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1355.0000	39.71	-7.02	32.69	74.00	-41.31	Peak
2	1355.0000	37.12	-7.02	30.10	54.00	-23.90	AVG
3	1985.0000	38.51	-2.93	35.58	74.00	-38.42	Peak
4	1985.0000	26.23	-2.93	23.30	54.00	-30.70	AVG
5	2825.0000	37.70	0.65	38.35	74.00	-35.65	Peak
6	2825.0000	26.05	0.65	26.70	54.00	-27.30	AVG
7	3935.0000	35.96	2.74	38.70	74.00	-35.30	Peak
8	3935.0000	22.66	2.74	25.40	54.00	-28.60	AVG
9	4550.0000	35.19	3.69	38.88	74.00	-35.12	Peak
10	4550.0000	23.11	3.69	26.80	54.00	-27.20	AVG
11	5290.0000	35.50	6.55	42.05	74.00	-31.95	Peak
12 *	5290.0000	24.05	6.55	30.60	54.00	-23.40	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

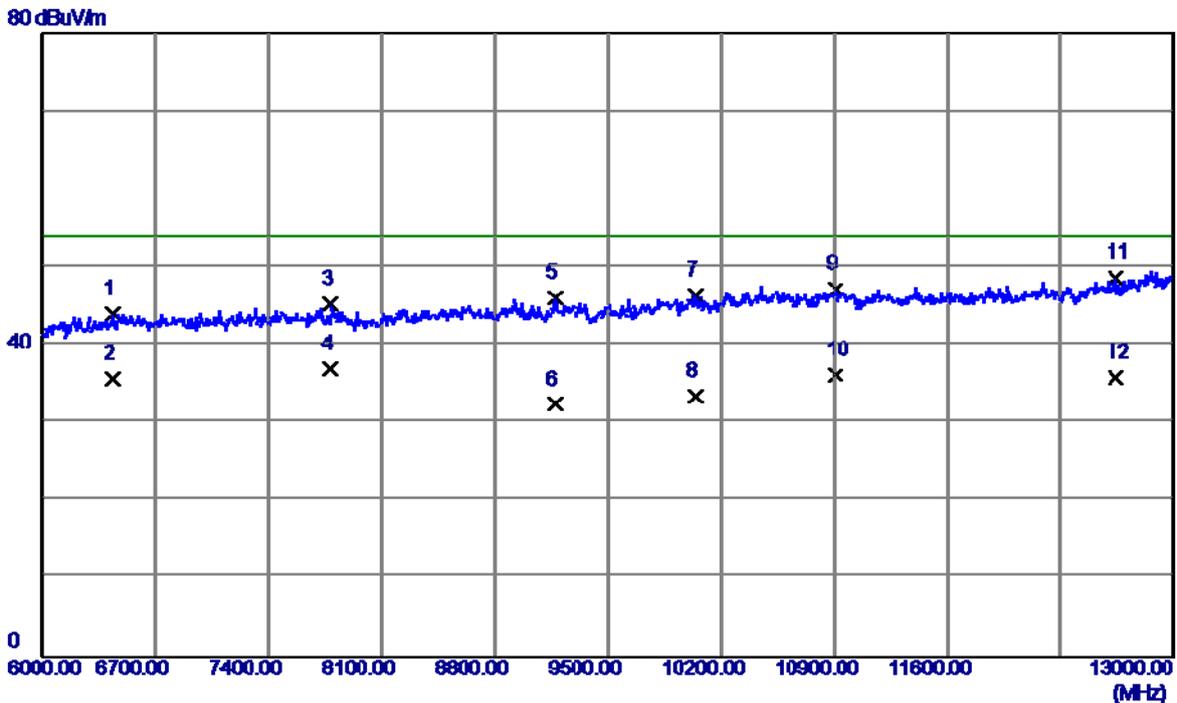


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6434.0000	33.35	10.65	44.00	74.00	-30.00	Peak
2	6434.0000	25.05	10.65	35.70	54.00	-18.30	AVG
3	7785.0000	33.50	11.73	45.23	74.00	-28.77	Peak
4 *	7785.0000	25.17	11.73	36.90	54.00	-17.10	AVG
5	9171.0000	32.73	13.32	46.05	74.00	-27.95	Peak
6	9171.0000	19.08	13.32	32.40	54.00	-21.60	AVG
7	10046.0000	32.17	14.23	46.40	74.00	-27.60	Peak
8	10046.0000	19.17	14.23	33.40	54.00	-20.60	AVG
9	10907.0000	31.34	15.81	47.15	74.00	-26.85	Peak
10	10907.0000	20.39	15.81	36.20	54.00	-17.80	AVG
11	12643.0000	31.73	16.95	48.68	74.00	-25.32	Peak
12	12643.0000	18.85	16.95	35.80	54.00	-18.20	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+WIFI+BT+GPS+Camera On		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

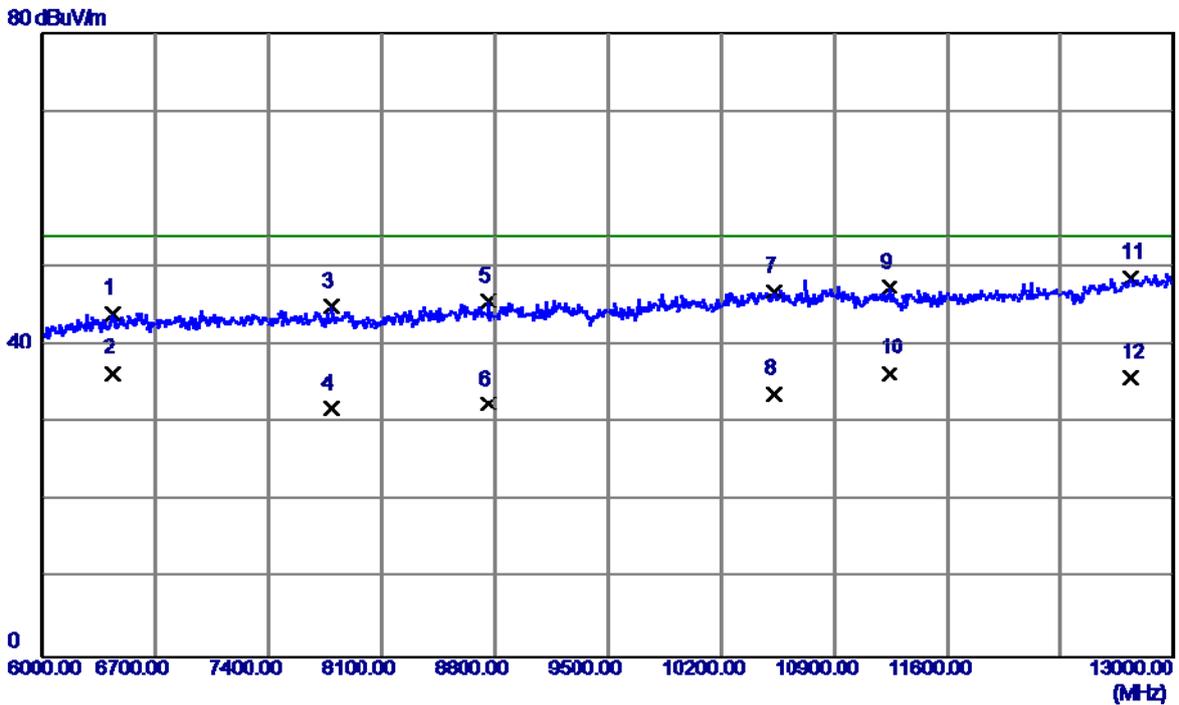


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6434.0000	33.43	10.65	44.08	74.00	-29.92	Peak
2 *	6434.0000	25.75	10.65	36.40	54.00	-17.60	AVG
3	7792.0000	33.20	11.73	44.93	74.00	-29.07	Peak
4	7792.0000	20.17	11.73	31.90	54.00	-22.10	AVG
5	8758.0000	32.41	13.20	45.61	74.00	-28.39	Peak
6	8758.0000	19.20	13.20	32.40	54.00	-21.60	AVG
7	10529.0000	31.56	15.33	46.89	74.00	-27.11	Peak
8	10529.0000	18.47	15.33	33.80	54.00	-20.20	AVG
9	11243.0000	31.73	15.71	47.44	74.00	-26.56	Peak
10	11243.0000	20.69	15.71	36.40	54.00	-17.60	AVG
11	12734.0000	31.39	17.25	48.64	74.00	-25.36	Peak
12	12734.0000	18.55	17.25	35.80	54.00	-18.20	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+playing+speaker		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

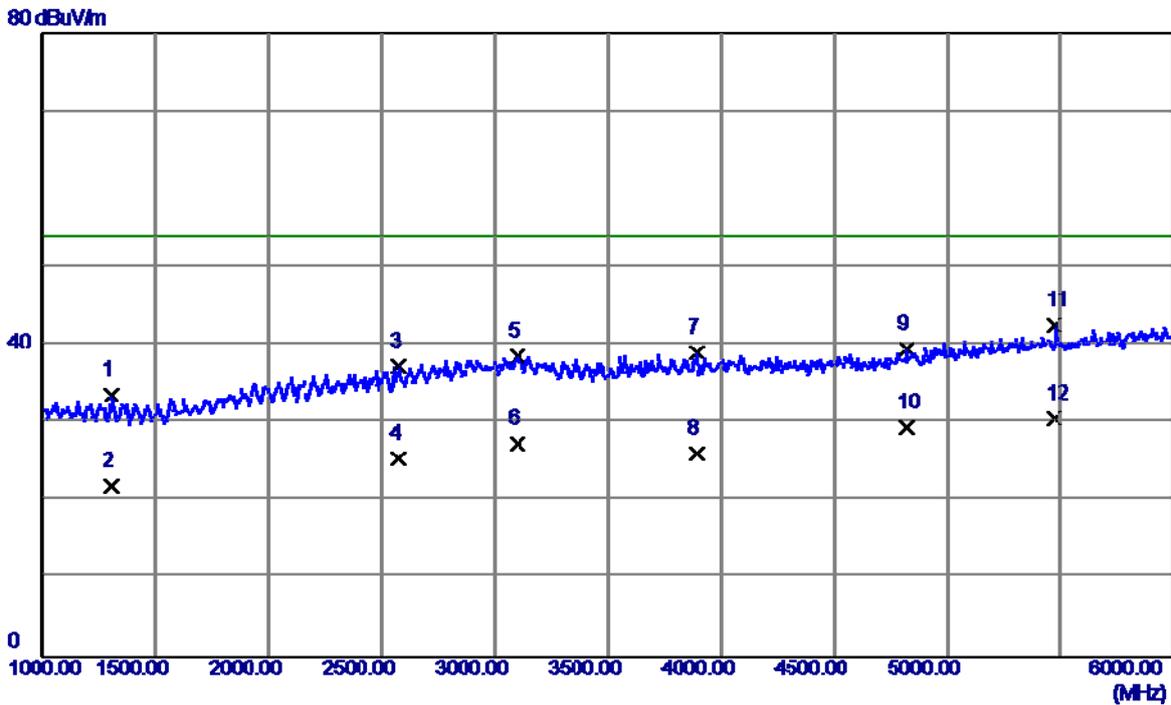


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1305.0000	40.71	-7.15	33.56	74.00	-40.44	Peak
2	1305.0000	29.05	-7.15	21.90	54.00	-32.10	AVG
3	2575.0000	37.86	-0.59	37.27	74.00	-36.73	Peak
4	2575.0000	25.99	-0.59	25.40	54.00	-28.60	AVG
5	3100.0000	37.03	1.49	38.52	74.00	-35.48	Peak
6	3100.0000	25.81	1.49	27.30	54.00	-26.70	AVG
7	3895.0000	36.38	2.61	38.99	74.00	-35.01	Peak
8	3895.0000	23.49	2.61	26.10	54.00	-27.90	AVG
9	4820.0000	34.70	4.84	39.54	74.00	-34.46	Peak
10	4820.0000	24.66	4.84	29.50	54.00	-24.50	AVG
11	5475.0000	35.34	7.15	42.49	74.00	-31.51	Peak
12 *	5475.0000	23.35	7.15	30.50	54.00	-23.50	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+playing+speaker		
Note	USB Cable:LuxshareAdapter:Huntkey		
Test Engineer	Lucky Mao		

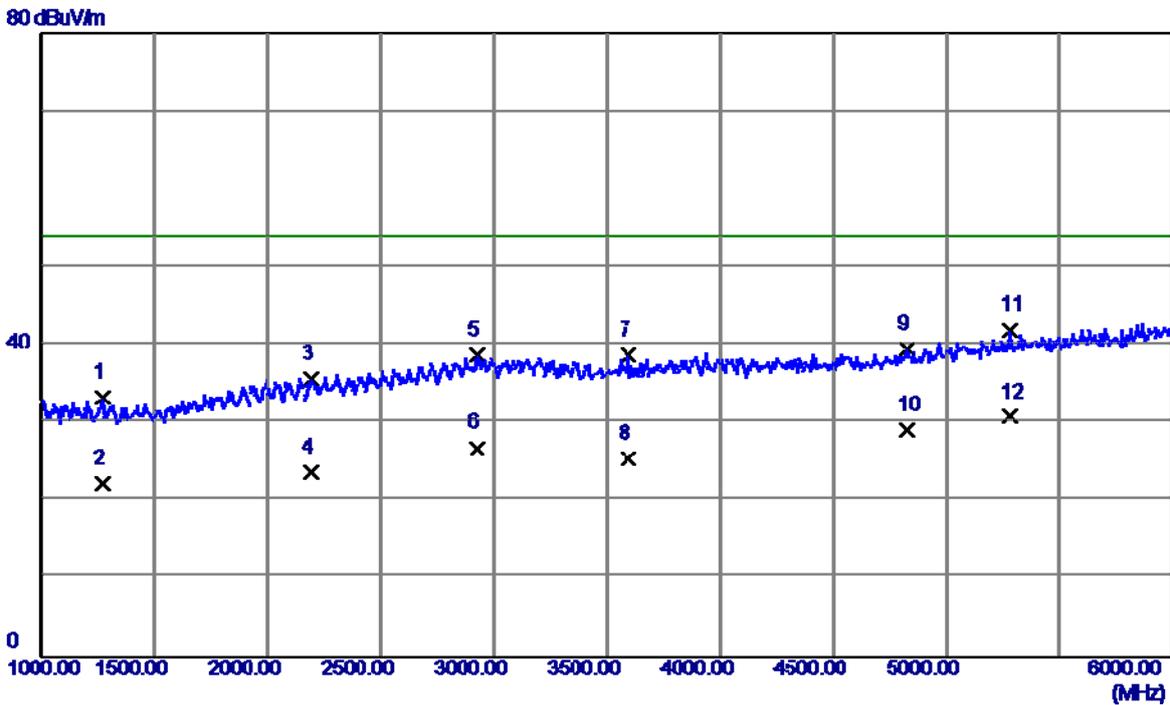


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1270.0000	40.47	-7.24	33.23	74.00	-40.77	Peak
2	1270.0000	29.44	-7.24	22.20	54.00	-31.80	AVG
3	2195.0000	37.78	-2.10	35.68	74.00	-38.32	Peak
4	2195.0000	25.80	-2.10	23.70	54.00	-30.30	AVG
5	2930.0000	37.55	1.18	38.73	74.00	-35.27	Peak
6	2930.0000	25.62	1.18	26.80	54.00	-27.20	AVG
7	3595.0000	37.03	1.63	38.66	74.00	-35.34	Peak
8	3595.0000	23.77	1.63	25.40	54.00	-28.60	AVG
9	4830.0000	34.71	4.88	39.59	74.00	-34.41	Peak
10	4830.0000	24.22	4.88	29.10	54.00	-24.90	AVG
11	5285.0000	35.44	6.53	41.97	74.00	-32.03	Peak
12 *	5285.0000	24.27	6.53	30.80	54.00	-23.20	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:Huntkey+Earphone:GoerTek		
Test Engineer	Lucky Mao		

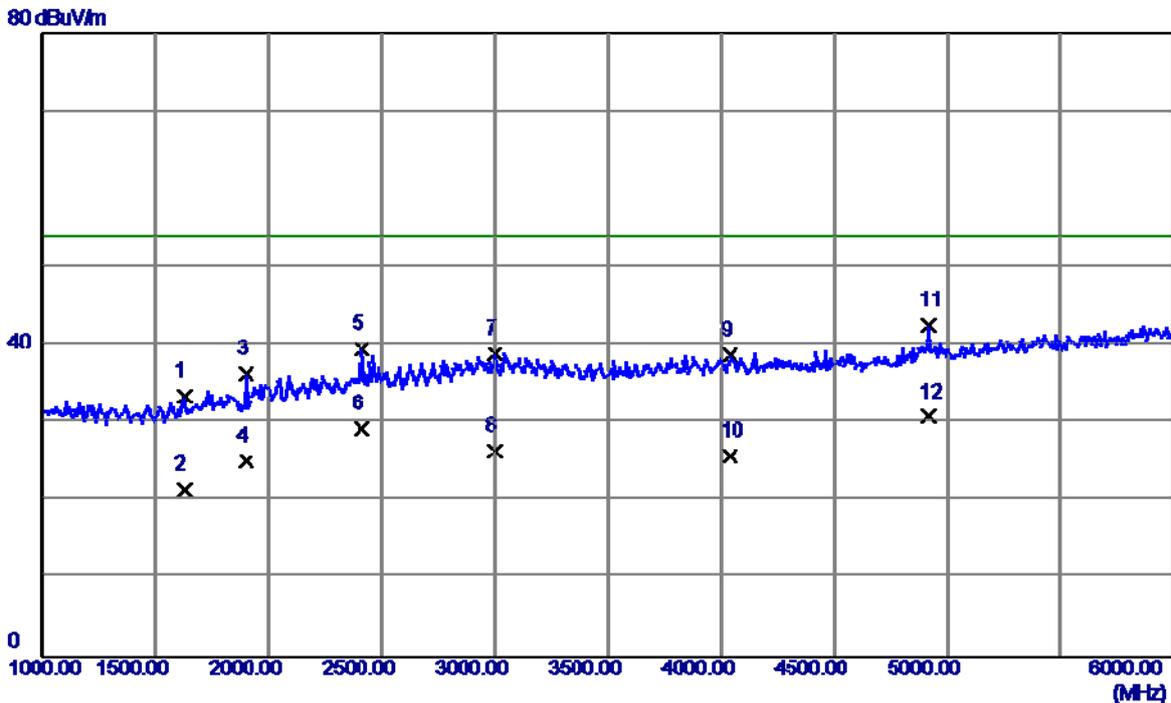


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1625.0000	39.06	-5.69	33.37	74.00	-40.63	Peak
2	1625.0000	27.09	-5.69	21.40	54.00	-32.60	AVG
3	1900.0000	39.94	-3.59	36.35	74.00	-37.65	Peak
4	1900.0000	28.69	-3.59	25.10	54.00	-28.90	AVG
5	2410.0000	40.84	-1.30	39.54	74.00	-34.46	Peak
6	2410.0000	30.60	-1.30	29.30	54.00	-24.70	AVG
7	3000.0000	37.41	1.53	38.94	74.00	-35.06	Peak
8	3000.0000	24.87	1.53	26.40	54.00	-27.60	AVG
9	4040.0000	35.68	2.99	38.67	74.00	-35.33	Peak
10	4040.0000	22.71	2.99	25.70	54.00	-28.30	AVG
11	4915.0000	37.25	5.24	42.49	74.00	-31.51	Peak
12 *	4915.0000	25.56	5.24	30.80	54.00	-23.20	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:Huntkey+Earphone:GoerTek		
Test Engineer	Lucky Mao		

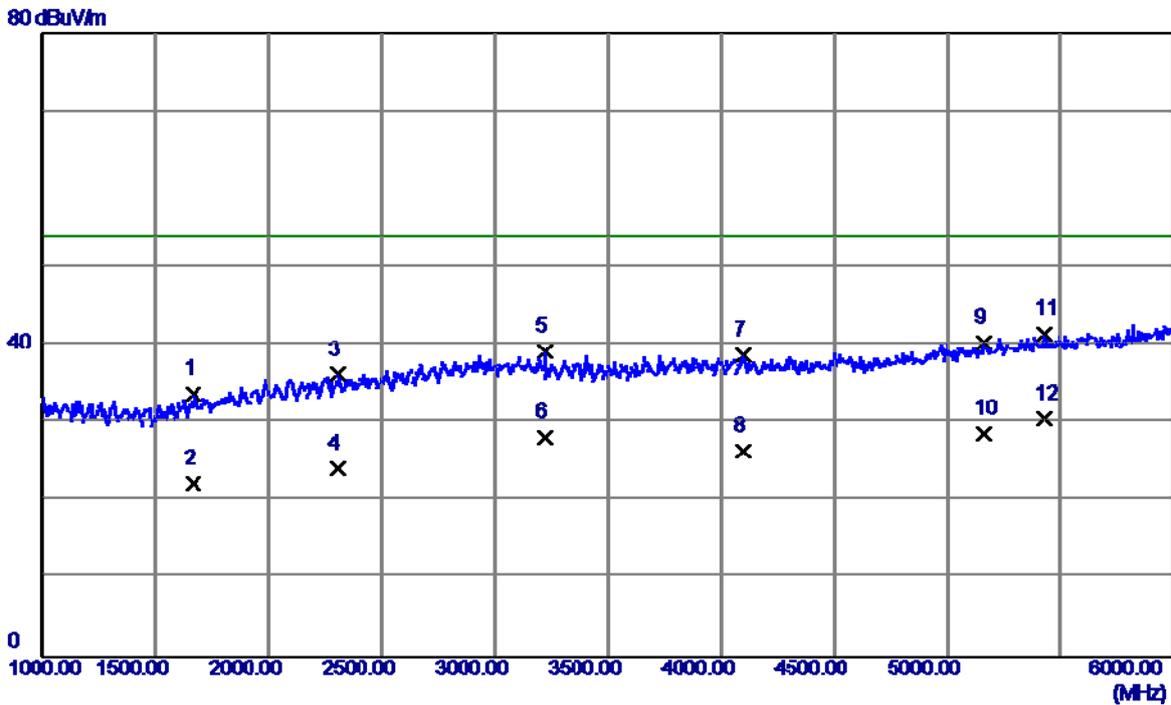


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1665.0000	39.16	-5.39	33.77	74.00	-40.23	Peak
2	1665.0000	27.69	-5.39	22.30	54.00	-31.70	AVG
3	2305.0000	37.93	-1.69	36.24	74.00	-37.76	Peak
4	2305.0000	25.79	-1.69	24.10	54.00	-29.90	AVG
5	3220.0000	37.73	1.44	39.17	74.00	-34.83	Peak
6	3220.0000	26.76	1.44	28.20	54.00	-25.80	AVG
7	4100.0000	35.61	3.06	38.67	74.00	-35.33	Peak
8	4100.0000	23.34	3.06	26.40	54.00	-27.60	AVG
9	5160.0000	34.17	6.12	40.29	74.00	-33.71	Peak
10	5160.0000	22.58	6.12	28.70	54.00	-25.30	AVG
11	5430.0000	34.50	7.00	41.50	74.00	-32.50	Peak
12 *	5430.0000	23.50	7.00	30.50	54.00	-23.50	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:Huntkey+Earphone:Lianchuang		
Test Engineer	Lucky Mao		

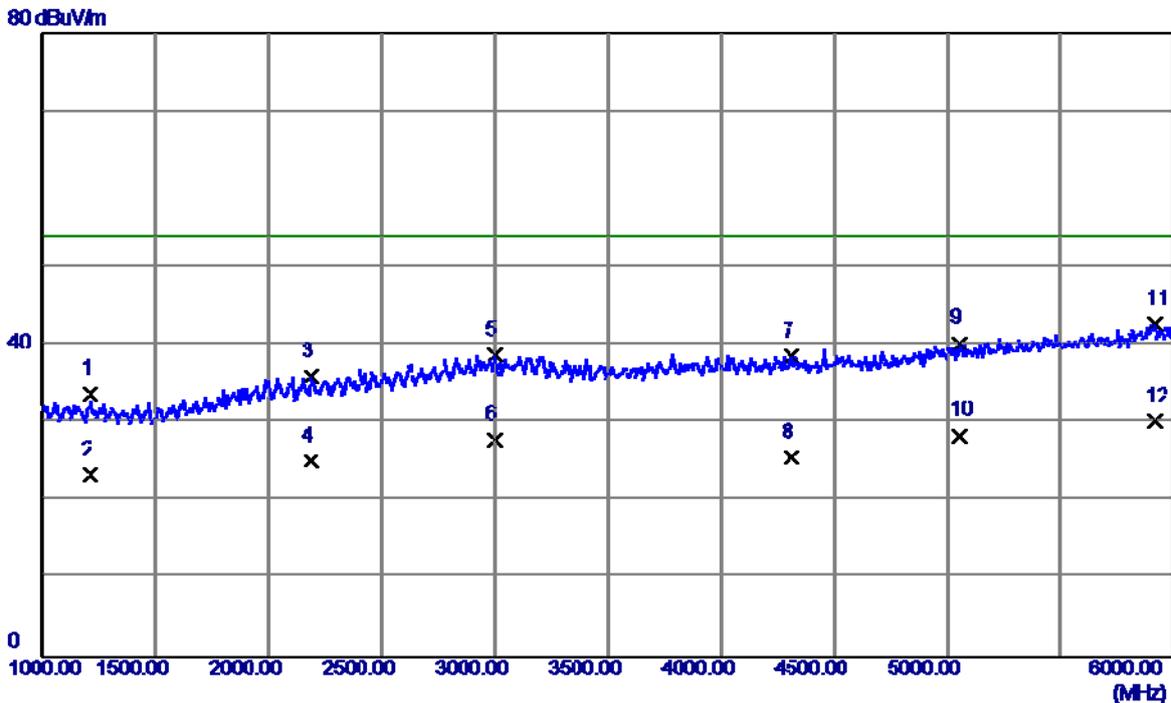


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1210.0000	41.10	-7.39	33.71	74.00	-40.29	Peak
2	1210.0000	30.69	-7.39	23.30	54.00	-30.70	AVG
3	2190.0000	38.15	-2.12	36.03	74.00	-37.97	Peak
4	2190.0000	27.22	-2.12	25.10	54.00	-28.90	AVG
5	3000.0000	37.17	1.53	38.70	74.00	-35.30	Peak
6	3000.0000	26.37	1.53	27.90	54.00	-26.10	AVG
7	4310.0000	35.35	3.28	38.63	74.00	-35.37	Peak
8	4310.0000	22.32	3.28	25.60	54.00	-28.40	AVG
9	5055.0000	34.46	5.78	40.24	74.00	-33.76	Peak
10	5055.0000	22.62	5.78	28.40	54.00	-25.60	AVG
11	5915.0000	34.05	8.69	42.74	74.00	-31.26	Peak
12 *	5915.0000	21.51	8.69	30.20	54.00	-23.80	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:Huntkey+Earphone:Lianchuang		
Test Engineer	Lucky Mao		

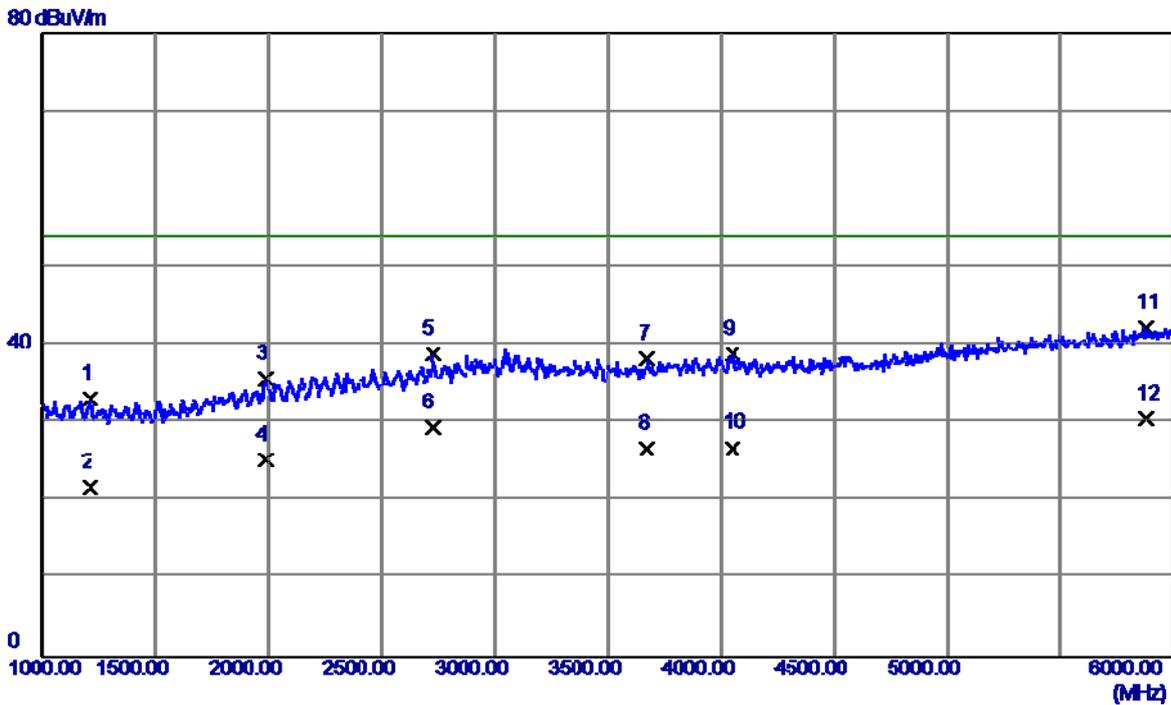


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1210.0000	40.49	-7.39	33.10	74.00	-40.90	Peak
2	1210.0000	29.19	-7.39	21.80	54.00	-32.20	AVG
3	1990.0000	38.65	-2.90	35.75	74.00	-38.25	Peak
4	1990.0000	28.20	-2.90	25.30	54.00	-28.70	AVG
5	2725.0000	38.71	0.15	38.86	74.00	-35.14	Peak
6	2725.0000	29.25	0.15	29.40	54.00	-24.60	AVG
7	3675.0000	36.29	1.89	38.18	74.00	-35.82	Peak
8	3675.0000	24.81	1.89	26.70	54.00	-27.30	AVG
9	4050.0000	35.84	3.00	38.84	74.00	-35.16	Peak
10	4050.0000	23.80	3.00	26.80	54.00	-27.20	AVG
11	5880.0000	33.65	8.57	42.22	74.00	-31.78	Peak
12 *	5880.0000	22.03	8.57	30.60	54.00	-23.40	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:Huntkey+Earphone:QUANCHENG		
Test Engineer	Lucky Mao		

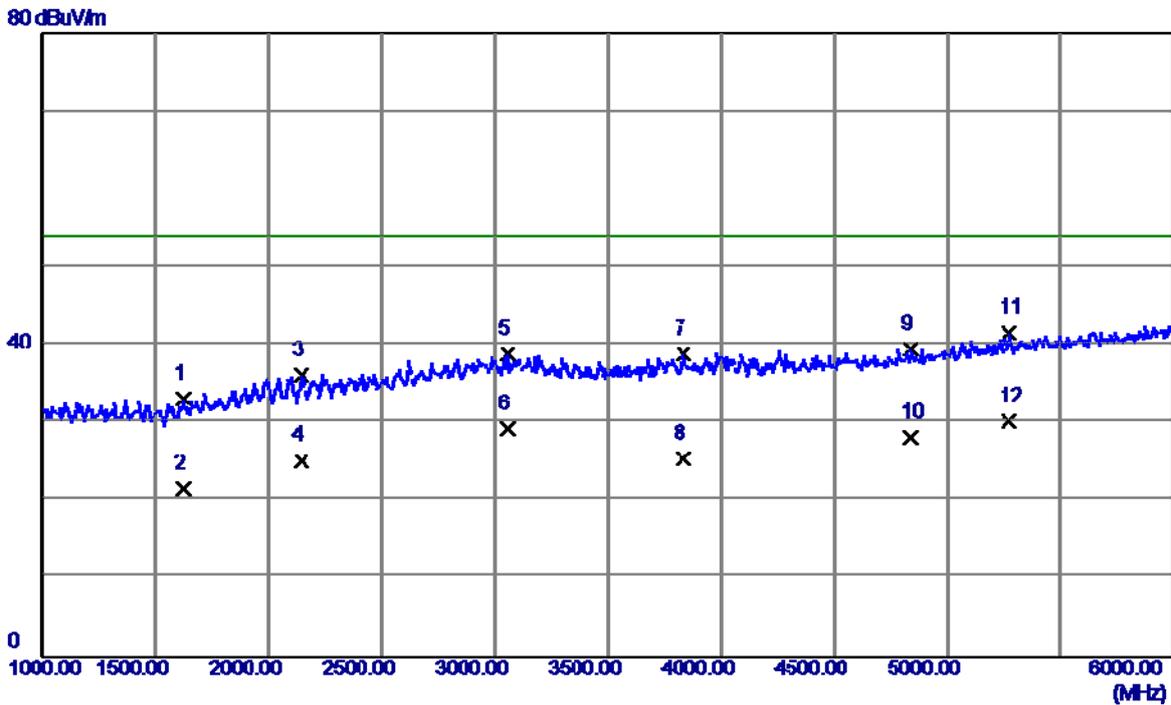


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1620.0000	38.91	-5.73	33.18	74.00	-40.82	Peak
2	1620.0000	27.33	-5.73	21.60	54.00	-32.40	AVG
3	2145.0000	38.42	-2.28	36.14	74.00	-37.86	Peak
4	2145.0000	27.48	-2.28	25.20	54.00	-28.80	AVG
5	3055.0000	37.42	1.51	38.93	74.00	-35.07	Peak
6	3055.0000	27.79	1.51	29.30	54.00	-24.70	AVG
7	3835.0000	36.51	2.41	38.92	74.00	-35.08	Peak
8	3835.0000	22.99	2.41	25.40	54.00	-28.60	AVG
9	4840.0000	34.62	4.92	39.54	74.00	-34.46	Peak
10	4840.0000	23.18	4.92	28.10	54.00	-25.90	AVG
11	5270.0000	35.13	6.48	41.61	74.00	-32.39	Peak
12 *	5270.0000	23.82	6.48	30.30	54.00	-23.70	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+playing+Earphone		
Note	USB Cable:Luxshare+Adapter:Huntkey+Earphone:QUANCHENG		
Test Engineer	Lucky Mao		

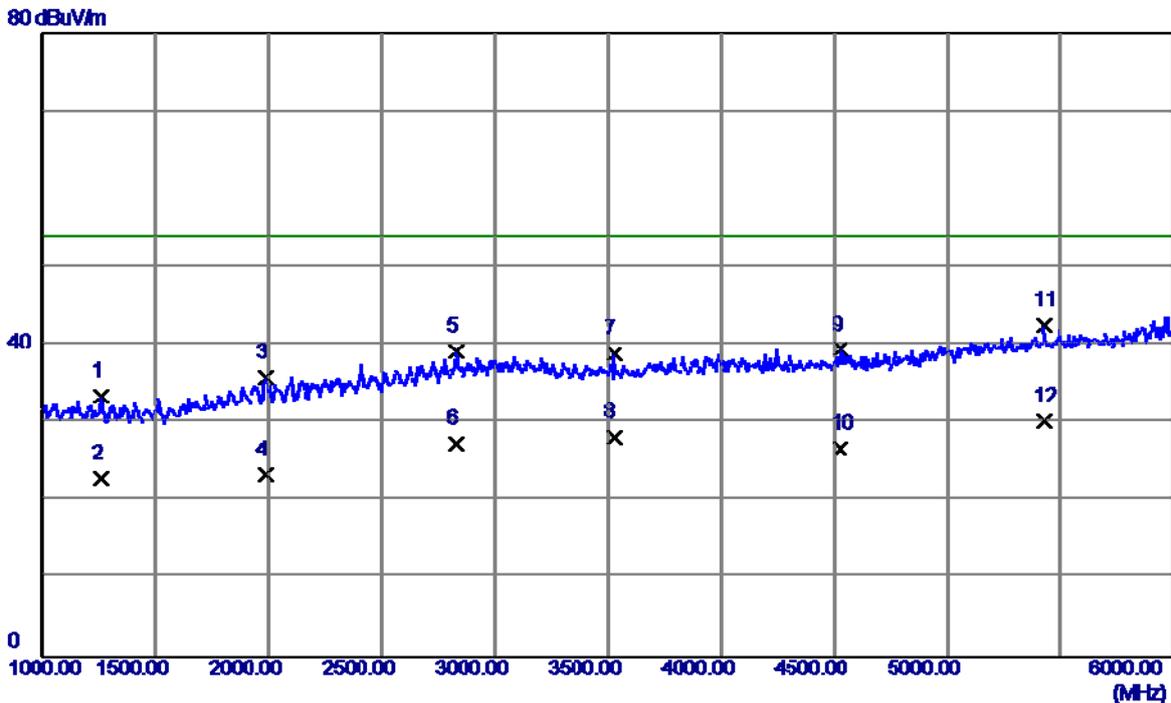


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1260.0000	40.69	-7.26	33.43	74.00	-40.57	Peak
2	1260.0000	30.16	-7.26	22.90	54.00	-31.10	AVG
3	1990.0000	38.71	-2.90	35.81	74.00	-38.19	Peak
4	1990.0000	26.30	-2.90	23.40	54.00	-30.60	AVG
5	2830.0000	38.45	0.68	39.13	74.00	-34.87	Peak
6	2830.0000	26.62	0.68	27.30	54.00	-26.70	AVG
7	3525.0000	37.54	1.40	38.94	74.00	-35.06	Peak
8	3525.0000	26.70	1.40	28.10	54.00	-25.90	AVG
9	4530.0000	35.83	3.61	39.44	74.00	-34.56	Peak
10	4530.0000	23.09	3.61	26.70	54.00	-27.30	AVG
11	5425.0000	35.63	6.99	42.62	74.00	-31.38	Peak
12 *	5425.0000	23.21	6.99	30.20	54.00	-23.80	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

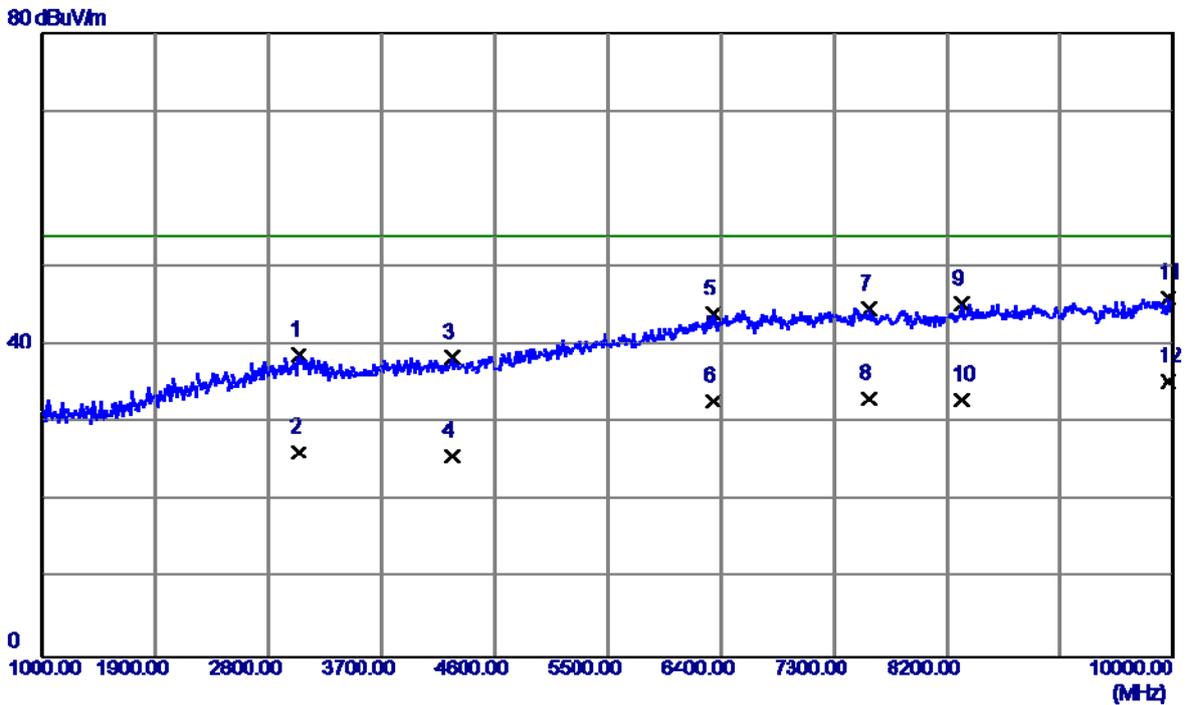


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3043.0000	37.14	1.51	38.65	74.00	-35.35	Peak
2	3043.0000	24.79	1.51	26.30	54.00	-27.70	AVG
3	4258.0000	35.14	3.22	38.36	74.00	-35.64	Peak
4	4258.0000	22.48	3.22	25.70	54.00	-28.30	AVG
5	6337.0000	33.66	10.28	43.94	74.00	-30.06	Peak
6	6337.0000	22.52	10.28	32.80	54.00	-21.20	AVG
7	7579.0000	32.94	11.75	44.69	74.00	-29.31	Peak
8	7579.0000	21.35	11.75	33.10	54.00	-20.90	AVG
9	8317.0000	32.77	12.53	45.30	74.00	-28.70	Peak
10	8317.0000	20.37	12.53	32.90	54.00	-21.10	AVG
11	9964.0000	32.10	14.05	46.15	74.00	-27.85	Peak
12 *	9964.0000	21.35	14.05	35.40	54.00	-18.60	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

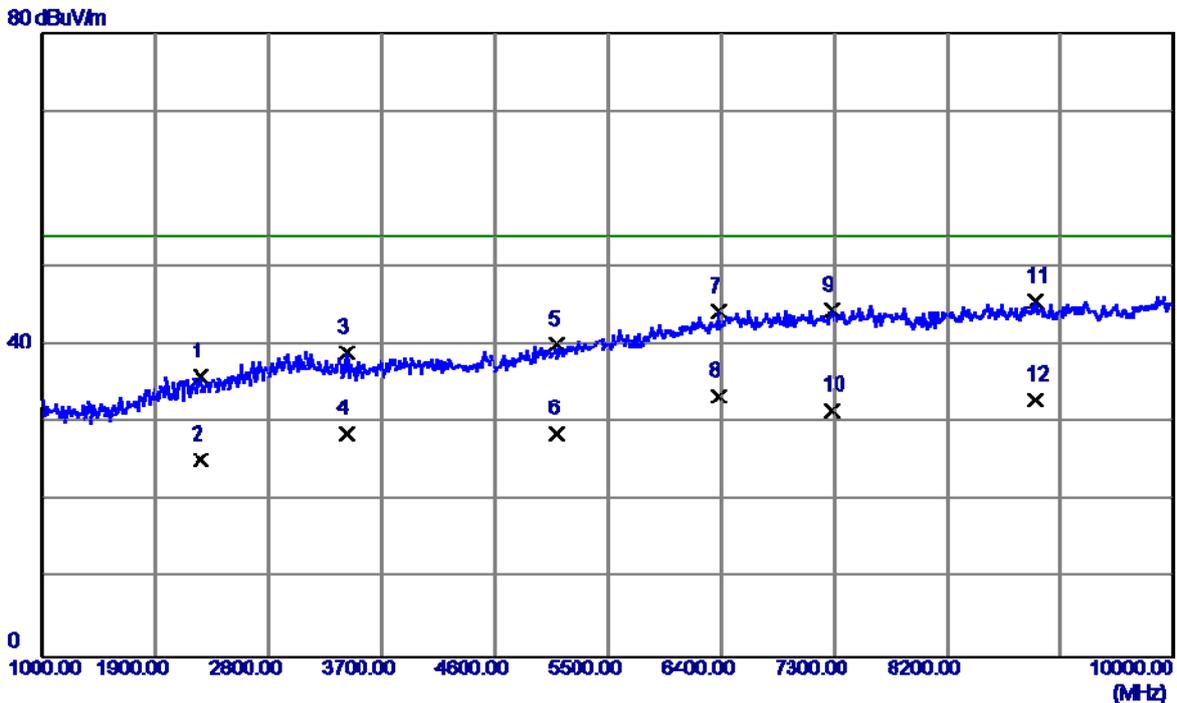


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2260.0000	37.81	-1.86	35.95	74.00	-38.05	Peak
2	2260.0000	27.16	-1.86	25.30	54.00	-28.70	AVG
3	3421.0000	37.74	1.35	39.09	74.00	-34.91	Peak
4	3421.0000	27.25	1.35	28.60	54.00	-25.40	AVG
5	5095.0000	34.17	5.91	40.08	74.00	-33.92	Peak
6	5095.0000	22.79	5.91	28.70	54.00	-25.30	AVG
7	6382.0000	33.80	10.45	44.25	74.00	-29.75	Peak
8 *	6382.0000	23.05	10.45	33.50	54.00	-20.50	AVG
9	7282.0000	33.11	11.31	44.42	74.00	-29.58	Peak
10	7282.0000	20.29	11.31	31.60	54.00	-22.40	AVG
11	8902.0000	32.27	13.31	45.58	74.00	-28.42	Peak
12	8902.0000	19.59	13.31	32.90	54.00	-21.10	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

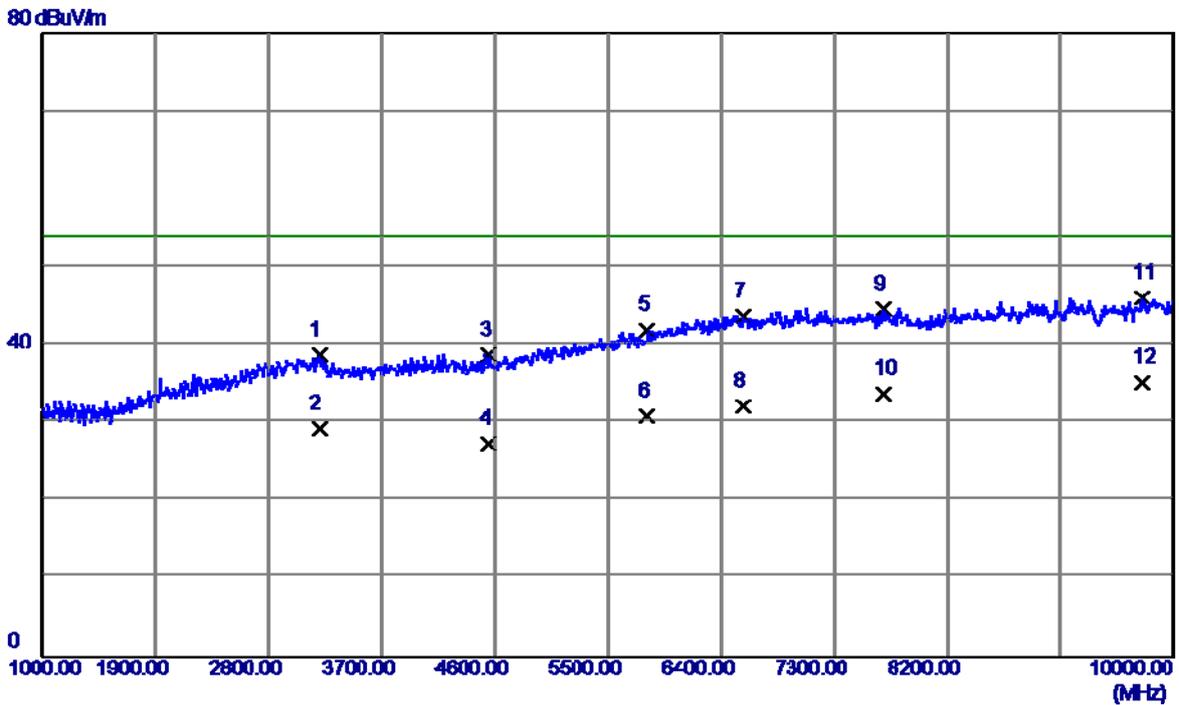


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3205.0000	37.23	1.44	38.67	74.00	-35.33	Peak
2	3205.0000	27.86	1.44	29.30	54.00	-24.70	AVG
3	4555.0000	34.99	3.71	38.70	74.00	-35.30	Peak
4	4555.0000	23.59	3.71	27.30	54.00	-26.70	AVG
5	5815.0000	33.54	8.34	41.88	74.00	-32.12	Peak
6	5815.0000	22.56	8.34	30.90	54.00	-23.10	AVG
7	6580.0000	32.85	10.88	43.73	74.00	-30.27	Peak
8	6580.0000	21.22	10.88	32.10	54.00	-21.90	AVG
9	7687.0000	32.88	11.74	44.62	74.00	-29.38	Peak
10	7687.0000	21.96	11.74	33.70	54.00	-20.30	AVG
11	9748.0000	32.39	13.66	46.05	74.00	-27.95	Peak
12 *	9748.0000	21.54	13.66	35.20	54.00	-18.80	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

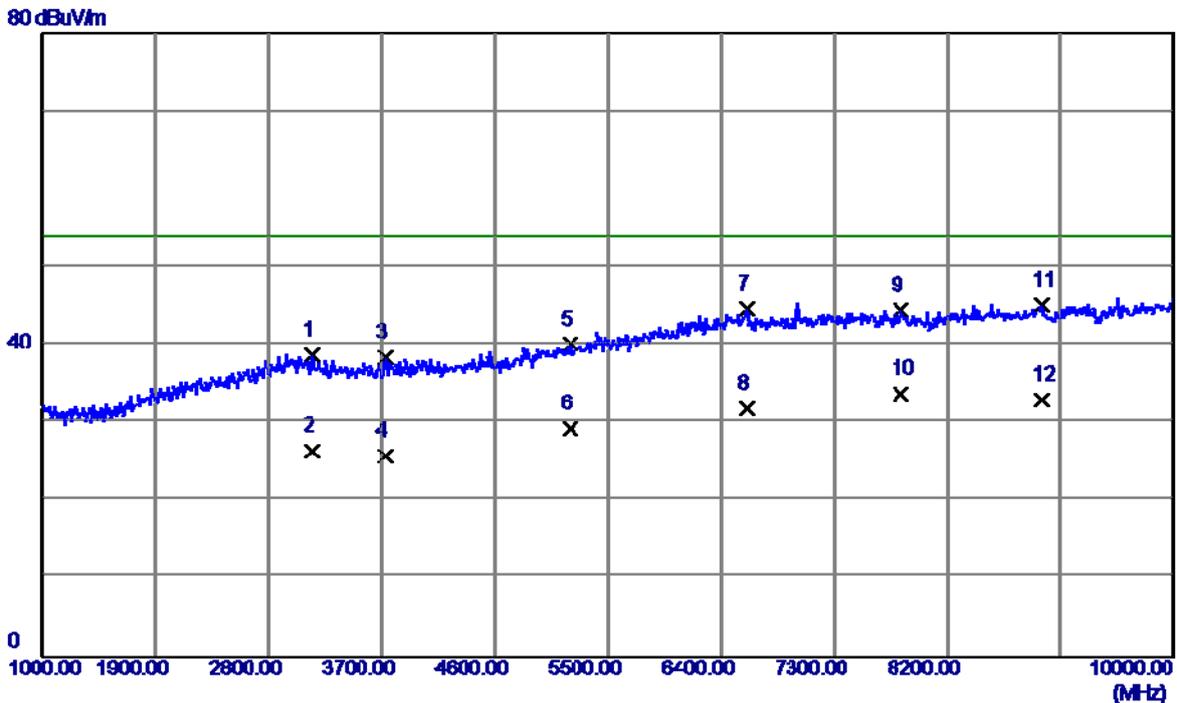


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3151.0000	37.29	1.47	38.76	74.00	-35.24	Peak
2	3151.0000	24.93	1.47	26.40	54.00	-27.60	AVG
3	3727.0000	36.38	2.06	38.44	74.00	-35.56	Peak
4	3727.0000	23.64	2.06	25.70	54.00	-28.30	AVG
5	5203.0000	33.82	6.26	40.08	74.00	-33.92	Peak
6	5203.0000	23.04	6.26	29.30	54.00	-24.70	AVG
7	6607.0000	33.75	10.87	44.62	74.00	-29.38	Peak
8	6607.0000	20.93	10.87	31.80	54.00	-22.20	AVG
9	7831.0000	32.82	11.73	44.55	74.00	-29.45	Peak
10 *	7831.0000	21.97	11.73	33.70	54.00	-20.30	AVG
11	8947.0000	31.81	13.34	45.15	74.00	-28.85	Peak
12	8947.0000	19.56	13.34	32.90	54.00	-21.10	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

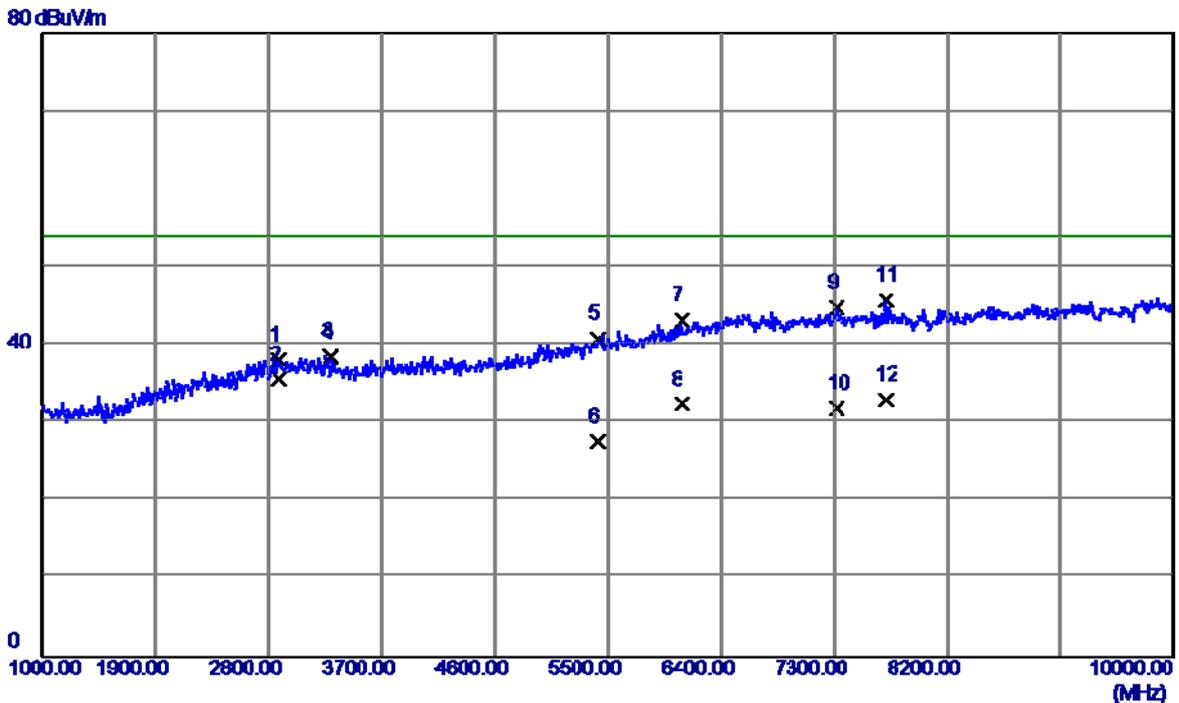


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2881.0000	37.17	0.93	38.10	74.00	-35.90	Peak
2	2881.0000	34.67	0.93	35.60	54.00	-18.40	AVG
3	3295.0000	37.19	1.40	38.59	74.00	-35.41	Peak
4 *	3295.0000	37.00	1.40	38.40	54.00	-15.60	AVG
5	5419.0000	33.83	6.97	40.80	74.00	-33.20	Peak
6	5419.0000	20.63	6.97	27.60	54.00	-26.40	AVG
7	6085.0000	33.81	9.32	43.13	74.00	-30.87	Peak
8	6085.0000	23.08	9.32	32.40	54.00	-21.60	AVG
9	7318.0000	33.48	11.39	44.87	74.00	-29.13	Peak
10	7318.0000	20.41	11.39	31.80	54.00	-22.20	AVG
11	7705.0000	33.95	11.74	45.69	74.00	-28.31	Peak
12	7705.0000	21.16	11.74	32.90	54.00	-21.10	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

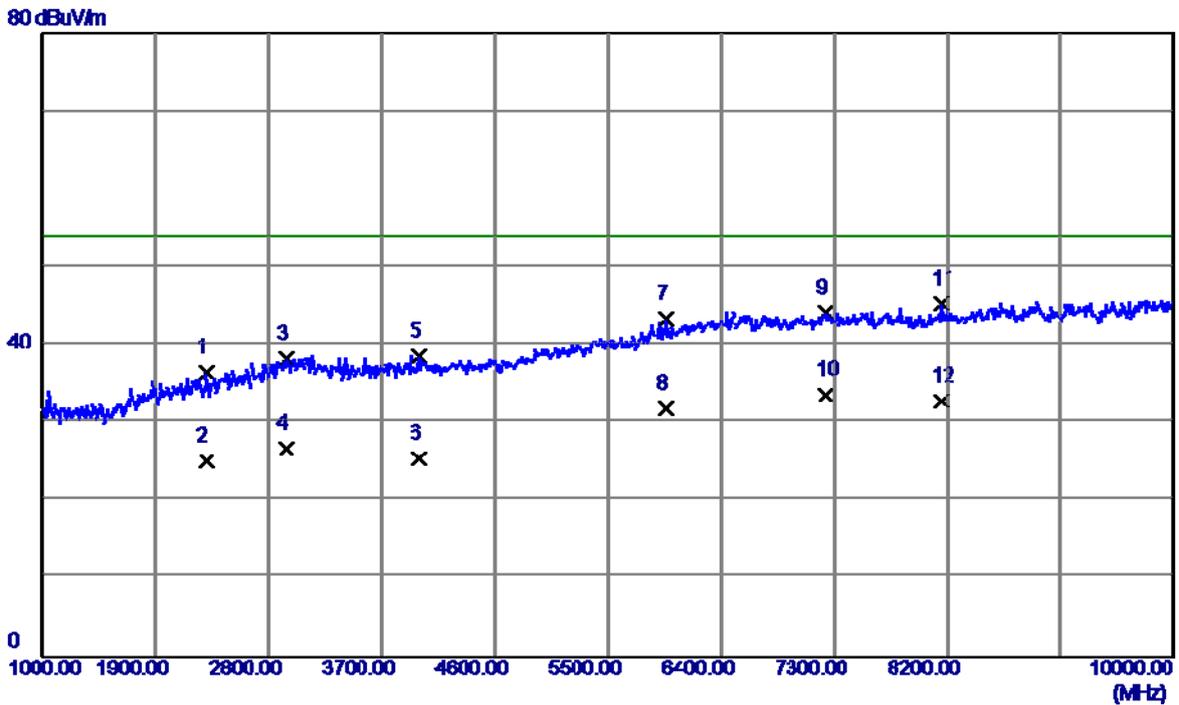


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2305.0000	38.13	-1.69	36.44	74.00	-37.56	Peak
2	2305.0000	26.79	-1.69	25.10	54.00	-28.90	AVG
3	2944.0000	36.93	1.25	38.18	74.00	-35.82	Peak
4	2944.0000	25.45	1.25	26.70	54.00	-27.30	AVG
5	3997.0000	35.69	2.94	38.63	74.00	-35.37	Peak
6	3997.0000	22.46	2.94	25.40	54.00	-28.60	AVG
7	5959.0000	34.49	8.85	43.34	74.00	-30.66	Peak
8	5959.0000	23.05	8.85	31.90	54.00	-22.10	AVG
9	7228.0000	32.95	11.21	44.16	74.00	-29.84	Peak
10 *	7228.0000	22.39	11.21	33.60	54.00	-20.40	AVG
11	8146.0000	33.15	12.09	45.24	74.00	-28.76	Peak
12	8146.0000	20.71	12.09	32.80	54.00	-21.20	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

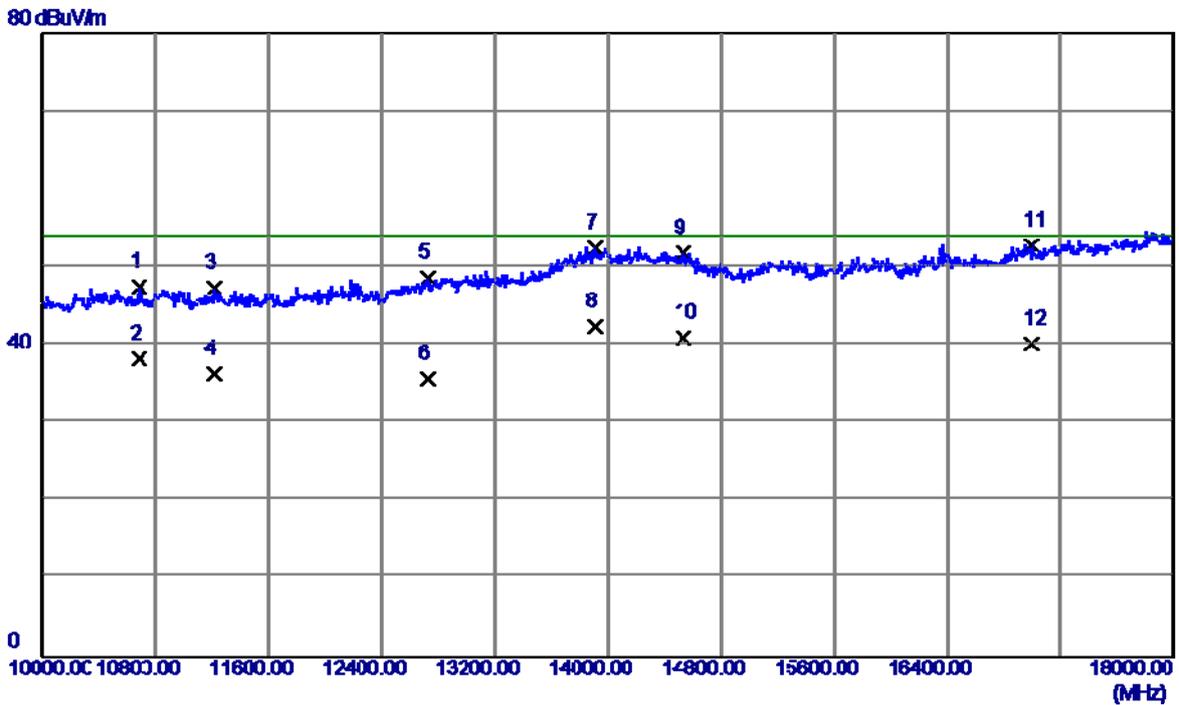

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	10688.0000	31.98	15.53	47.51	74.00	-26.49	Peak
2	10688.0000	22.67	15.53	38.20	54.00	-15.80	AVG
3	11216.0000	31.63	15.74	47.37	74.00	-26.63	Peak
4	11216.0000	20.56	15.74	36.30	54.00	-17.70	AVG
5	12728.0000	31.39	17.23	48.62	74.00	-25.38	Peak
6	12728.0000	18.47	17.23	35.70	54.00	-18.30	AVG
7	13912.0000	31.11	21.42	52.53	74.00	-21.47	Peak
8 *	13912.0000	20.98	21.42	42.40	54.00	-11.60	AVG
9	14536.0000	31.60	20.29	51.89	74.00	-22.11	Peak
10	14536.0000	20.61	20.29	40.90	54.00	-13.10	AVG
11	17000.0000	32.59	20.28	52.87	74.00	-21.13	Peak
12	17000.0000	19.92	20.28	40.20	54.00	-13.80	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	USB Cable:Luxshare+Adapter:Huntkey		
Test Engineer	Lucky Mao		

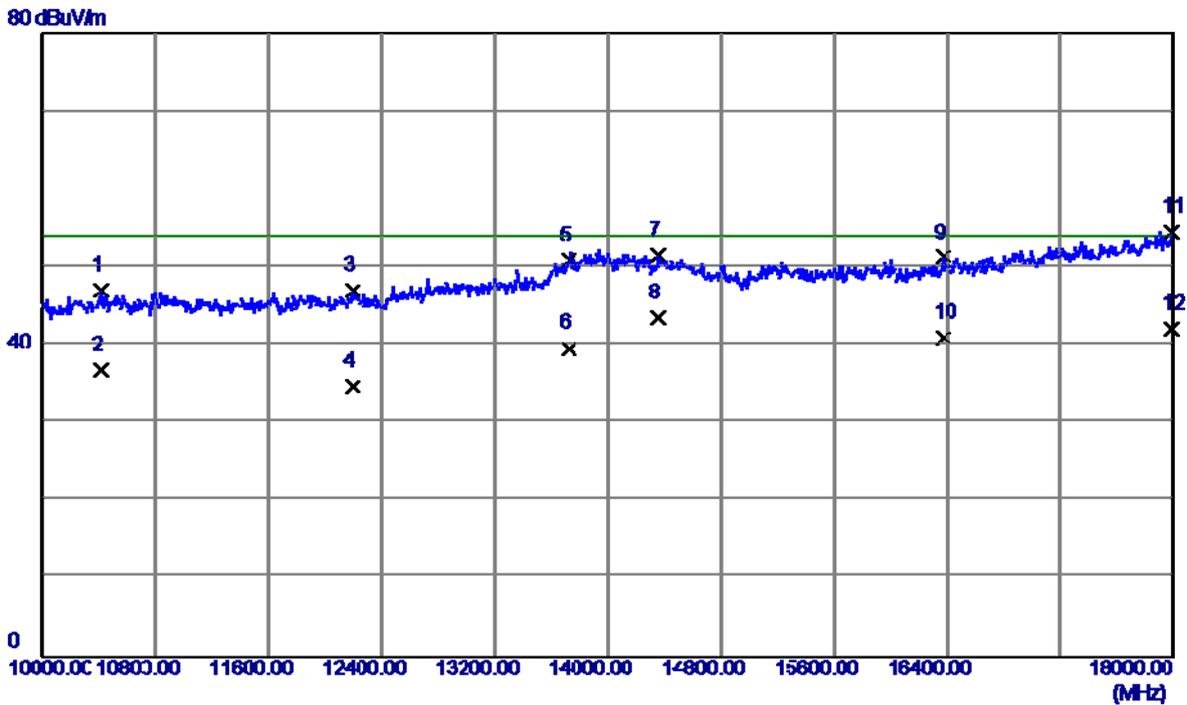

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	10416.0000	32.02	15.09	47.11	74.00	-26.89	Peak
2	10416.0000	21.71	15.09	36.80	54.00	-17.20	AVG
3	12192.0000	31.19	15.86	47.05	74.00	-26.95	Peak
4	12192.0000	18.84	15.86	34.70	54.00	-19.30	AVG
5	13728.0000	30.30	20.55	50.85	74.00	-23.15	Peak
6	13728.0000	19.05	20.55	39.60	54.00	-14.40	AVG
7	14352.0000	30.60	20.87	51.47	74.00	-22.53	Peak
8 *	14352.0000	22.63	20.87	43.50	54.00	-10.50	AVG
9	16376.0000	33.36	17.92	51.28	74.00	-22.72	Peak
10	16376.0000	22.98	17.92	40.90	54.00	-13.10	AVG
11	17992.0000	31.92	22.69	54.61	74.00	-19.39	Peak
12	17992.0000	19.41	22.69	42.10	54.00	-11.90	AVG