

FCCEMC Test Report

FCC ID: QISBGO-L03

Project No. : 1608C212B
Equipment : HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)
Test Model : BGO-L03
Series Model : N/A
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian,
Longgang District ,Shenzhen 518129, P.R.China

Date of Receipt : Sep. 28, 2017
Date of Test : Sep. 28, 2017 ~ Oct. 13, 2017
Issued Date : Oct. 16, 2017
Tested by : BTL Inc.

Testing Engineer :

Sam Wang
(Sam Wang)

Technical Manager :

Bill Zhang
(Bill Zhang)

Authorized Signatory :

Tony Li
(Tony Li)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

NVLAP
Lab Code: 200788-01

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 EUT OPERATING CONDITIONS	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.5 DESCRIPTION OF SUPPORT UNITS	12
4 . EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	41
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	41
4.2.2 MEASUREMENT INSTRUMENTS LIST	42
4.2.3 TEST PROCEDURE	43
4.2.4 DEVIATION FROM TEST STANDARD	43
4.2.5 TEST SETUP	44
4.2.6 TEST RESULTS-BELOW 1GHZ	44
4.2.7 TEST RESULTS-ABOVE 1GHZ	71

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1608C212	Original Issue.	Sep. 06, 2016
BTL-FCCE-1-1608C212B	<p>Compared with the previous report (BTL-FCCE-1-1608C212),</p> <ol style="list-style-type: none"> 1. Coslight battery changed from Breaker to PTC. 2. Added a battery manufacturers (SCUD), so all the test items have been re-evaluated and recorded in the test report. <p>In this test report only records the test results of the new battery, the original test results please refer to original report.</p> <p>This test report only in valid when be combined with previous test report(s).</p>	Oct. 16, 2017

1.CERIFICATION

Equipment : HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)
Brand Name : HUAWEI
Test Model : BGO-L03
Series Model : N/A
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,Shenzhen
518129, P.R.China
Date of Test : Sep. 28, 2017 ~ Oct. 13, 2017
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1608C212B) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE(2) NOTE(3)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is below 108 MHz, so the test will not be performed.
- (3) The requirement followed by the client's specification.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town,Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

Designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz~30MHz	2.32

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	30MHz~200MHz	V	3.82
		30MHz~200MHz	H	3.78
		200MHz~ 1,000MHz	V	4.10
		200MHz~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~ 40GHz	V	4.15
		18GHz~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)
Brand Name	HUAWEI
Test Model	BGO-L03
Series Model	N/A
Model Difference	N/A
Frequency	GSM850/1900 WCDMA B2/4/5 LTE B2/4/5/7/17 BT 4.0 Wi-Fi: 802.11b/g/n
Power Source	#1 DC voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) Dongguan Phitek Electronics Co., Ltd Model: HW-050100U01 (US), HW-050100A01 (AU) HW-050100E01 (EU), HW-050100B01 (UK) #2 Supplied from battery.
Power Rating	#1 I/P: 100-240V~50/60Hz, 0.2A #2 DC 3.7V 4000mAh
HW Version	Baggio-L03A
SW Version	BGO-L03C331B010

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

- | Item | Mfr/Brand | Model. |
|-----------|---|---------------------|
| Battery | Harbin Coslight Power Co.,Ltd. | HB3G1 |
| | Sunwoda Electronic Co., LTD | |
| | SCUD | |
| USB Cable | HONGLIN TECHNOLOGY CO., LTD | 130-26988 |
| | FOXCONN INTERCONNECT CO., LTD | CUBB01M-HC304-DH |
| | Shenzhen Luxshare Precision Industry Co., Ltd | L99U2017-CS-H |
| Earphone | GoerTek Inc | HA1-3, HG-04A |
| | Jiangxi Lianchuang Hongsheng Electronic Co.,LTD | MEMD1632B580C00 |
| | BOLUO COUNTY QUANCHENG ELECTRONIC | 1311-3291-3.5mm-229 |
| Adapter | HUIZHOU BYD ELECTRONIC CO., LTD. | HW-050100U01 (US) |
| | Shenzhen Huntkey Electric Co., Ltd. | HW-050100A01 (AU) |
| | Dongguan Phitek Electronics Co., Ltd | HW-050100E01 (EU) |
| | | HW-050100B01 (UK) |

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	USB copy(EUT with PC)+idle
Mode 2	Adapter +WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)


For Conducted Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+idle
Mode 2	Adapter +WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB copy(EUT with PC)+idle
Mode 2	Adapter +WIFI+BT+GPS+Camera on
Mode 3	Adapter+Playing+Speaker
Mode 4	Adapter+Playing+Earphone
Mode 5	Adapter+Traffic(GSM)
Mode 6	Adapter+Traffic(WCDMA)
Mode 7	Adapter+Traffic(LTE)


3.3 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

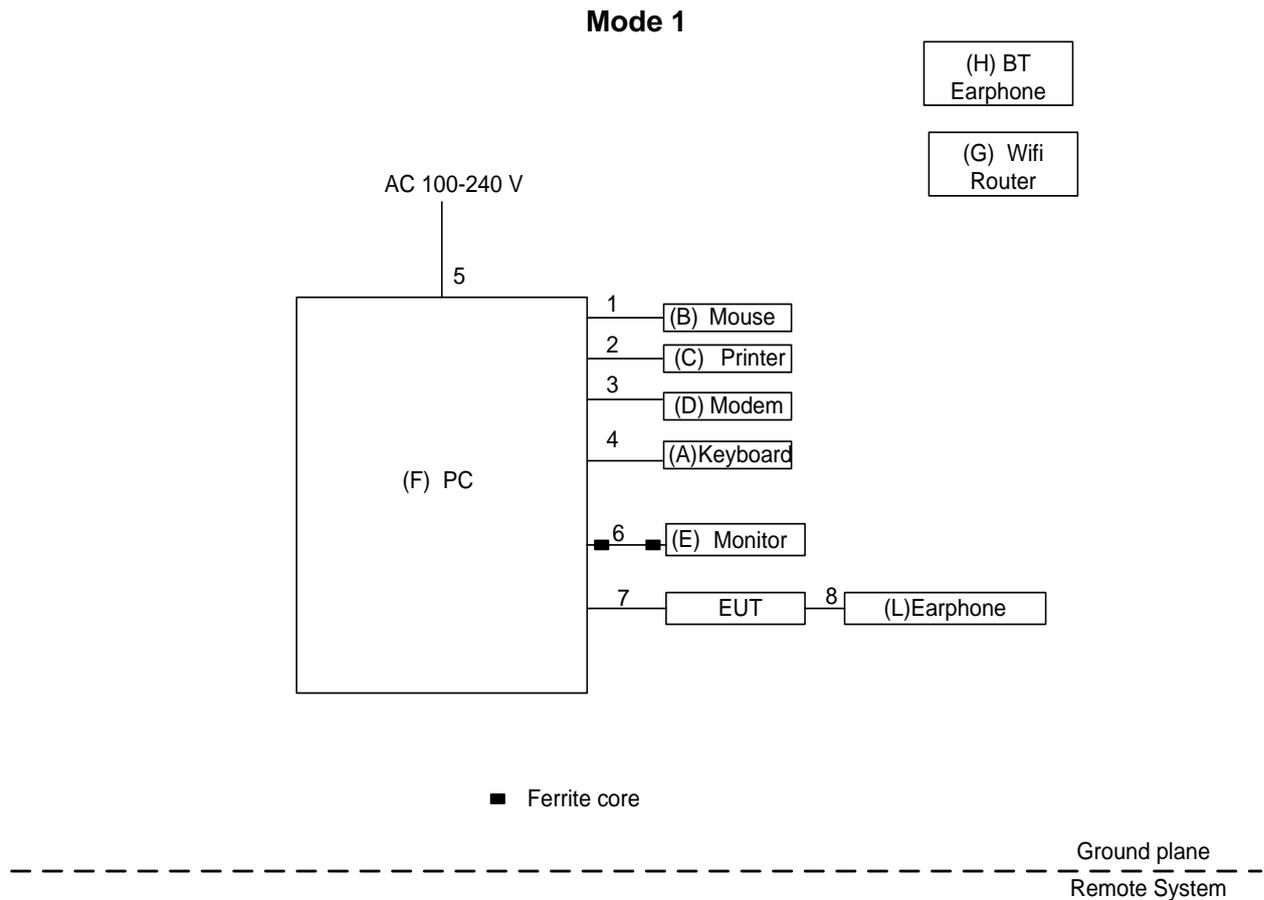

Mode 2~7

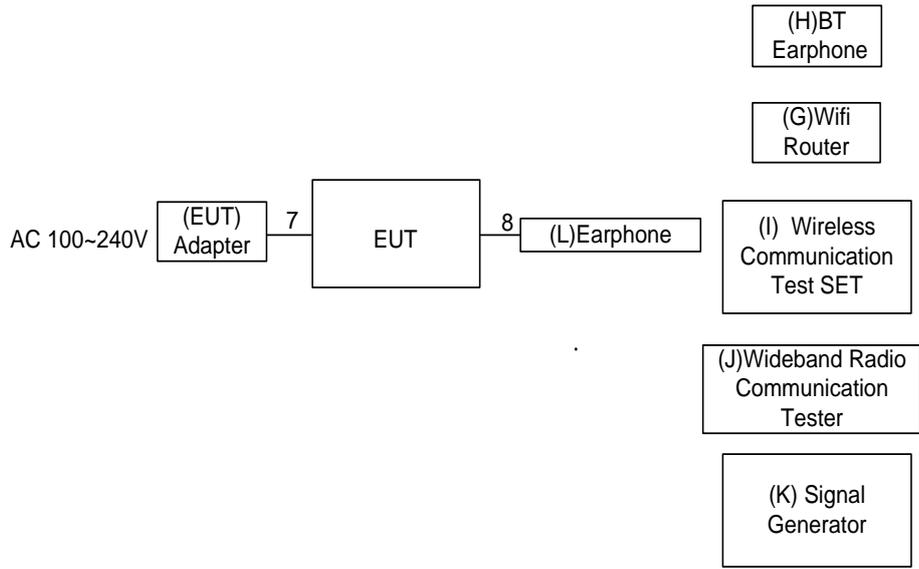

----- Ground plane -----
----- Remote System -----

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-1WNS
F	PC	Dell	DCSM	DOC	G7K832X
G	wireless router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
H	BT earphone	N/A	N/A	N/A	N/A
I	Wireless Communication Test SET	Agilent	(8960 Series) E5515C	N/A	N/A
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125
K	SignalGenerator	Agilent	E4438C	N/A	MY49071316
L	Earphone	Apple	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	PARALLEL Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Audio Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Measurement Software	Farad	EZ-EMC Ver.NB-03A 1-01	N/A	N/A
2	Cable		RG223	12m	Oct. 20, 2017
3	LISN	EMCO	3816/2	00052765	Mar. 26, 2018
4	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 26, 2018
5	TWO-LINE V-NETWORK	R&S	ENV216	101447	Mar. 26, 2018
6	EMI Test Receiver	R&S	ESCI	100382	Mar. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

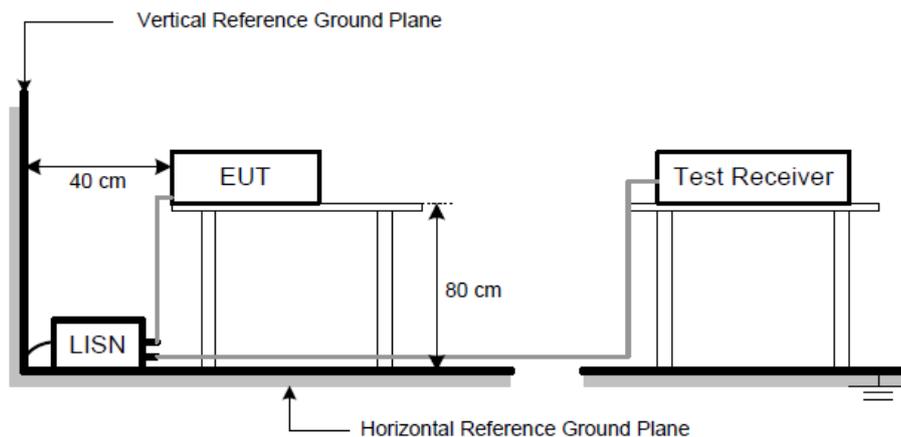


4.1.6 TEST RESULTS

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz, VBW =10KHz, Swp. Time = 0.3 sec./MHz. Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz, VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:Coslight		
Test Engineer	Sam Wang		

80 dBuV

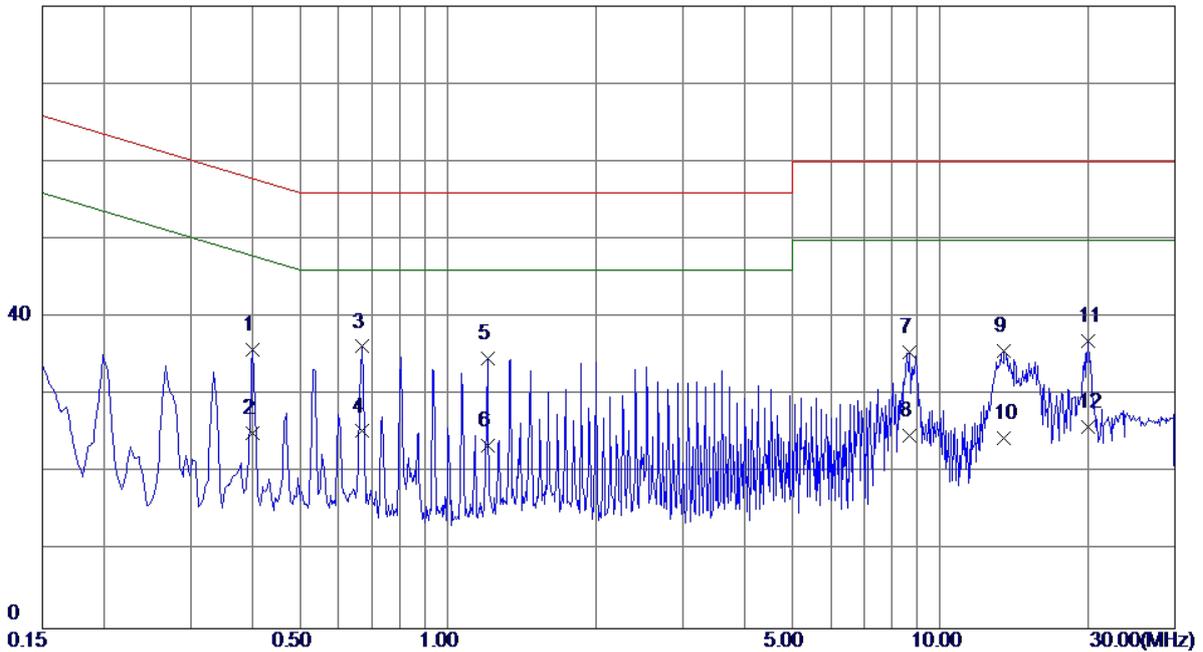


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.4020	26.09	9.75	35.84	57.81	-21.97	QP
2	0.4020	15.30	9.75	25.05	47.81	-22.76	AVG
3 *	0.6675	26.48	9.76	36.24	56.00	-19.76	QP
4	0.6675	15.60	9.76	25.36	46.00	-20.64	AVG
5	1.2030	24.96	9.80	34.76	56.00	-21.24	QP
6	1.2030	13.70	9.80	23.50	46.00	-22.50	AVG
7	8.6775	25.46	10.04	35.50	60.00	-24.50	QP
8	8.6775	14.80	10.04	24.84	50.00	-25.16	AVG
9	13.4835	25.38	10.24	35.62	60.00	-24.38	QP
10	13.4835	14.20	10.24	24.44	50.00	-25.56	AVG
11	20.0264	26.67	10.31	36.98	60.00	-23.02	QP
12	20.0264	15.60	10.31	25.91	50.00	-24.09	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:Coslight		
Test Engineer	Sam Wang		

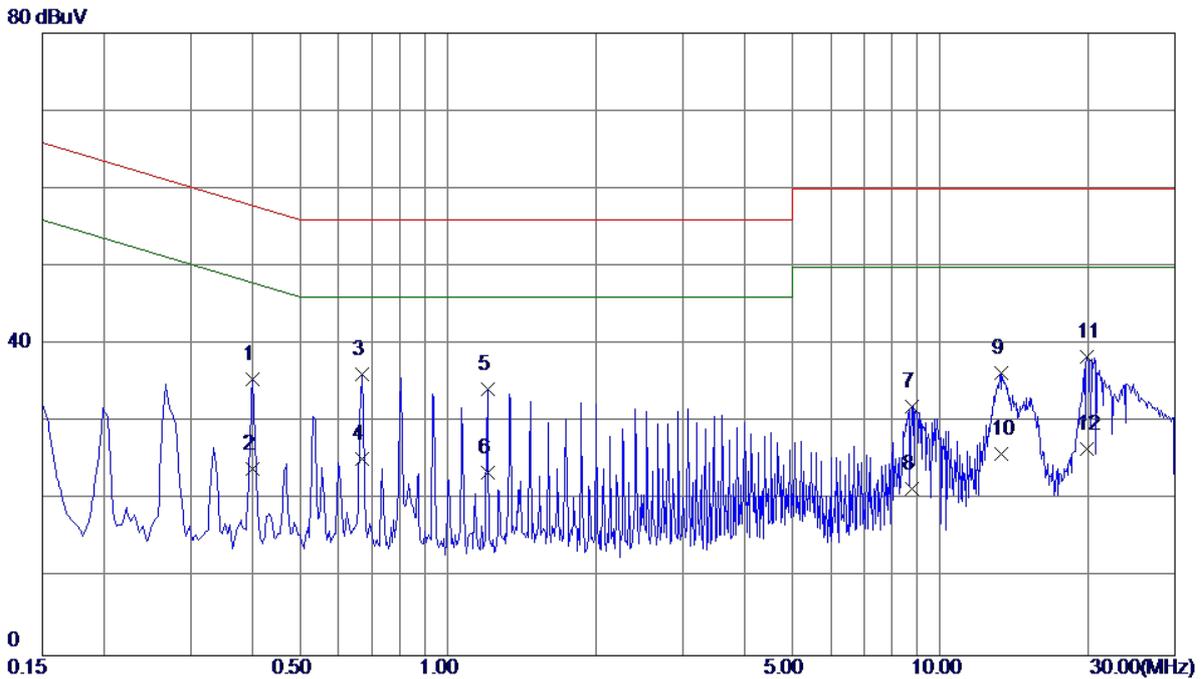


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.4020	25.85	9.64	35.49	57.81	-22.32	QP
2	0.4020	14.30	9.64	23.94	47.81	-23.87	AVG
3 *	0.6675	26.47	9.66	36.13	56.00	-19.87	QP
4	0.6675	15.60	9.66	25.26	46.00	-20.74	AVG
5	1.2030	24.59	9.68	34.27	56.00	-21.73	QP
6	1.2030	13.80	9.68	23.48	46.00	-22.52	AVG
7	8.7450	22.04	9.98	32.02	60.00	-27.98	QP
8	8.7450	11.40	9.98	21.38	50.00	-28.62	AVG
9	13.3485	26.05	10.24	36.29	60.00	-23.71	QP
10	13.3485	15.70	10.24	25.94	50.00	-24.06	AVG
11	19.8915	27.96	10.41	38.37	60.00	-21.63	QP
12	19.8915	16.20	10.41	26.61	50.00	-23.39	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:SCUD		
Test Engineer	Sam Wang		

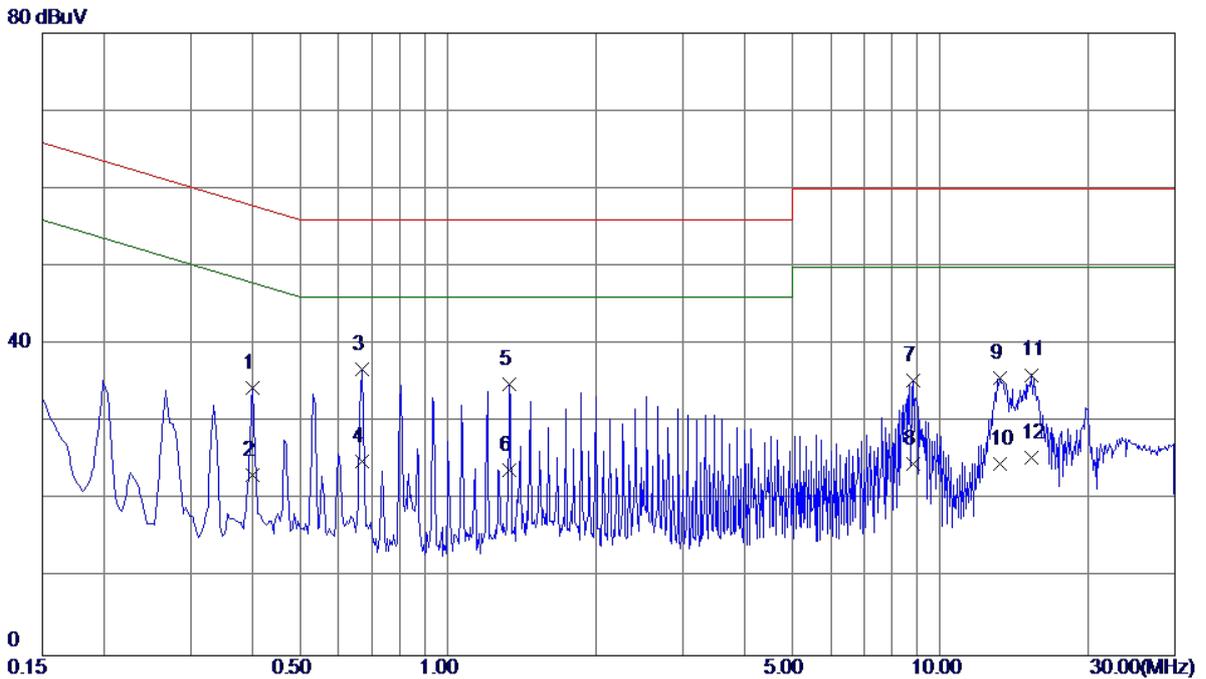


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.4020	24.62	9.75	34.37	57.81	-23.44	QP
2	0.4020	13.50	9.75	23.25	47.81	-24.56	AVG
3 *	0.6675	26.97	9.76	36.73	56.00	-19.27	QP
4	0.6675	15.20	9.76	24.96	46.00	-21.04	AVG
5	1.3335	25.07	9.80	34.87	56.00	-21.13	QP
6	1.3335	14.10	9.80	23.90	46.00	-22.10	AVG
7	8.8080	25.39	10.04	35.43	60.00	-24.57	QP
8	8.8080	14.60	10.04	24.64	50.00	-25.36	AVG
9	13.2090	25.38	10.23	35.61	60.00	-24.39	QP
10	13.2090	14.40	10.23	24.63	50.00	-25.37	AVG
11	15.3465	25.77	10.31	36.08	60.00	-23.92	QP
12	15.3465	15.20	10.31	25.51	50.00	-24.49	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:SCUD		
Test Engineer	Sam Wang		

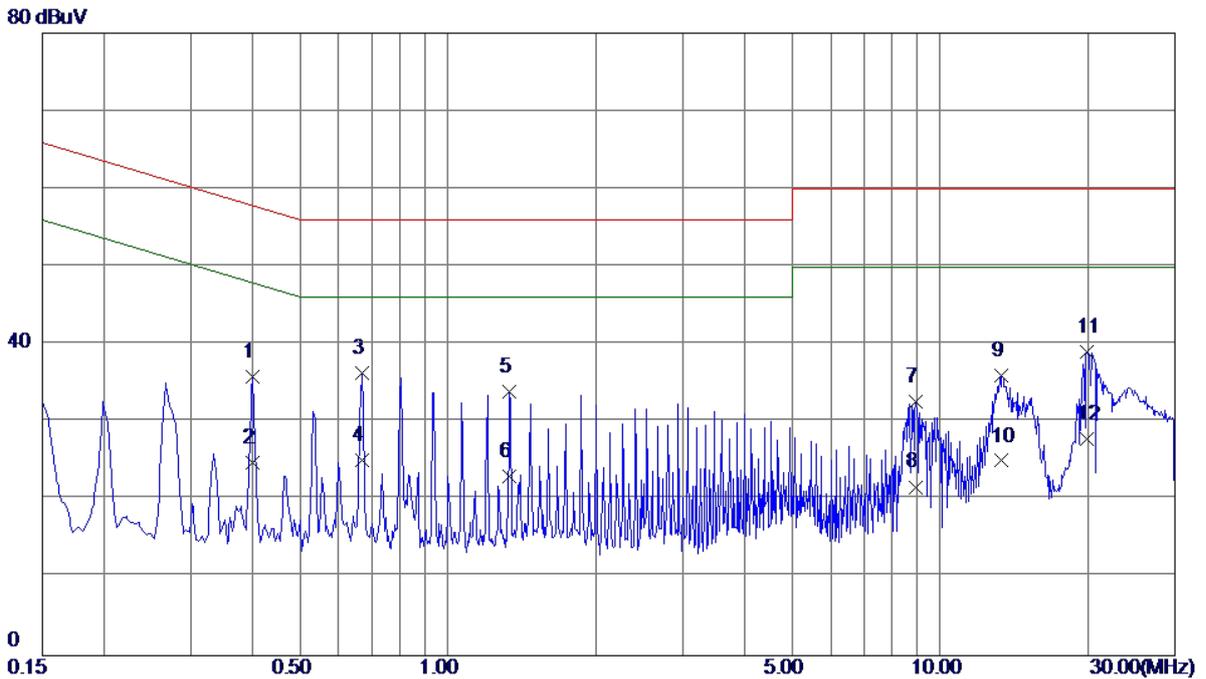


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.4020	26.16	9.64	35.80	57.81	-22.01	QP
2	0.4020	15.20	9.64	24.84	47.81	-22.97	AVG
3 *	0.6675	26.69	9.66	36.35	56.00	-19.65	QP
4	0.6675	15.50	9.66	25.16	46.00	-20.84	AVG
5	1.3335	24.24	9.68	33.92	56.00	-22.08	QP
6	1.3335	13.30	9.68	22.98	46.00	-23.02	AVG
7	8.9430	22.68	9.98	32.66	60.00	-27.34	QP
8	8.9430	11.70	9.98	21.68	50.00	-28.32	AVG
9	13.3440	25.75	10.24	35.99	60.00	-24.01	QP
10	13.3440	14.80	10.24	25.04	50.00	-24.96	AVG
11	19.8870	28.64	10.41	39.05	60.00	-20.95	QP
12	19.8870	17.50	10.41	27.91	50.00	-22.09	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

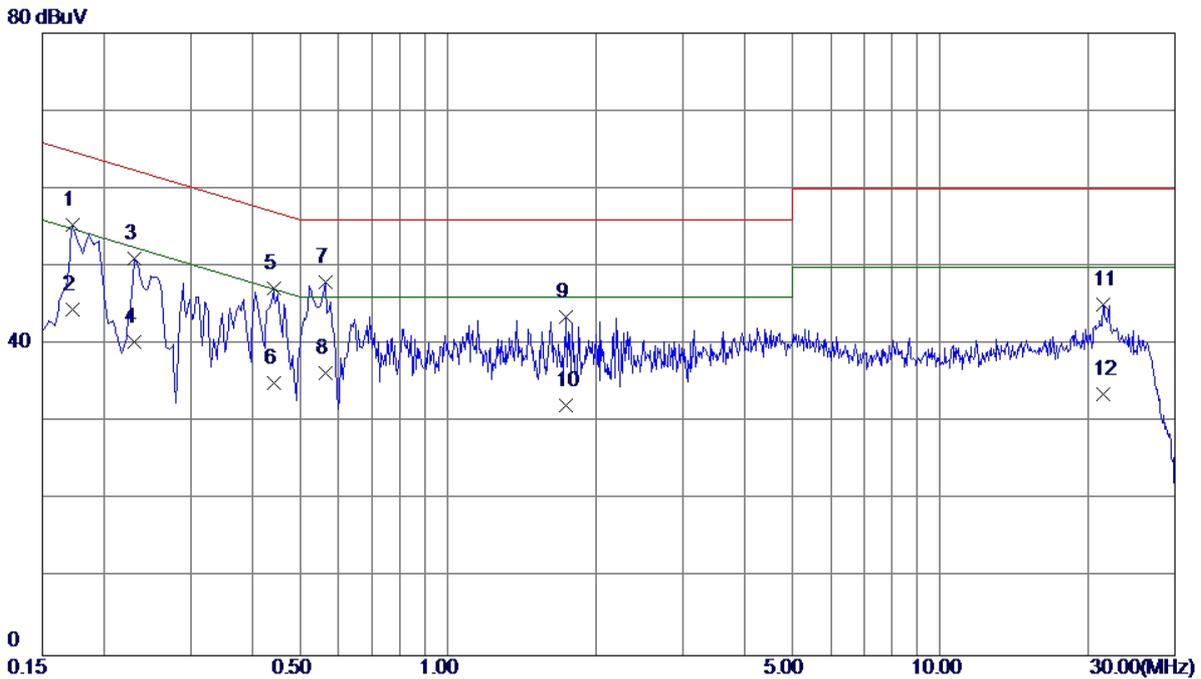


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1725	45.64	9.74	55.38	64.84	-9.46	QP
2	0.1725	34.80	9.74	44.54	54.84	-10.30	AVG
3	0.2310	41.32	9.72	51.04	62.41	-11.37	QP
4	0.2310	30.60	9.72	40.32	52.41	-12.09	AVG
5	0.4425	37.38	9.75	47.13	57.01	-9.88	QP
6	0.4425	25.30	9.75	35.05	47.01	-11.96	AVG
7 *	0.5639	38.22	9.76	47.98	56.00	-8.02	QP
8	0.5639	26.50	9.76	36.26	46.00	-9.74	AVG
9	1.7385	33.72	9.81	43.53	56.00	-12.47	QP
10	1.7385	22.40	9.81	32.21	46.00	-13.79	AVG
11	21.4575	34.71	10.34	45.05	60.00	-14.95	QP
12	21.4575	23.20	10.34	33.54	50.00	-16.46	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

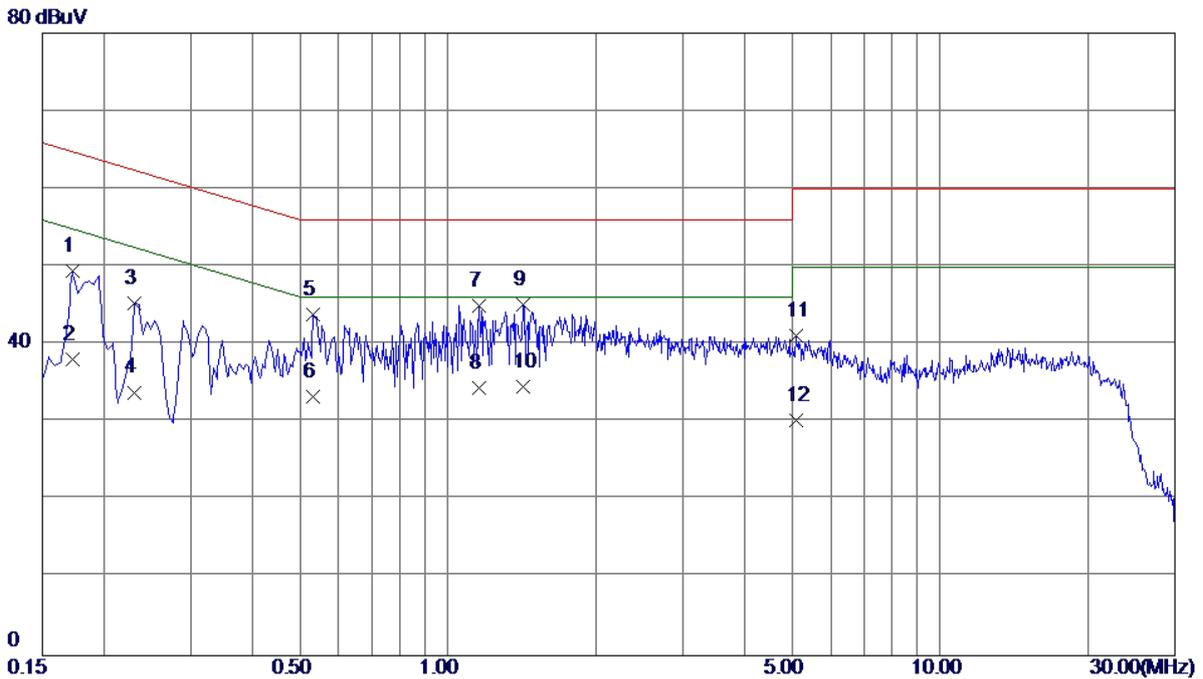


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1725	39.81	9.64	49.45	64.84	-15.39	QP
2	0.1725	28.40	9.64	38.04	54.84	-16.80	AVG
3	0.2310	35.58	9.64	45.22	62.41	-17.19	QP
4	0.2310	24.20	9.64	33.84	52.41	-18.57	AVG
5	0.5325	34.20	9.66	43.86	56.00	-12.14	QP
6	0.5325	23.60	9.66	33.26	46.00	-12.74	AVG
7	1.1580	35.28	9.68	44.96	56.00	-11.04	QP
8	1.1580	24.69	9.68	34.37	46.00	-11.63	AVG
9 *	1.4190	35.39	9.69	45.08	56.00	-10.92	QP
10	1.4190	24.80	9.69	34.49	46.00	-11.51	AVG
11	5.0910	31.23	9.84	41.07	60.00	-18.93	QP
12	5.0910	20.40	9.84	30.24	50.00	-19.76	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

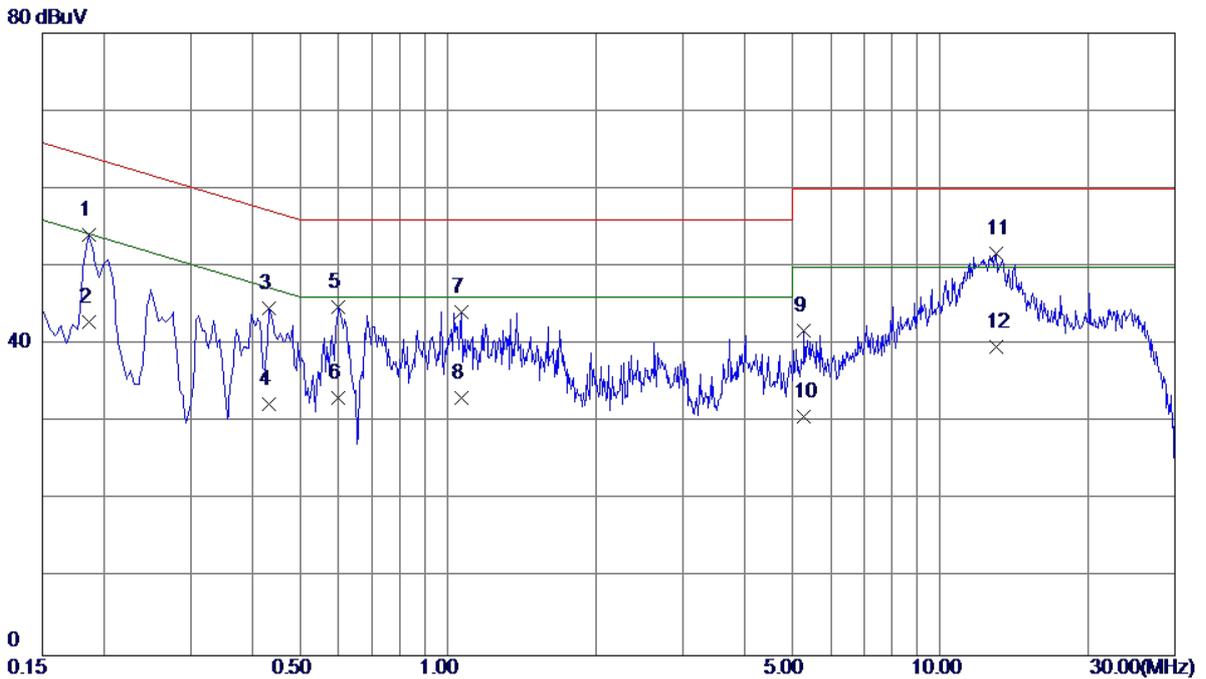


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1860	44.38	9.73	54.11	64.21	-10.10	QP
2	0.1860	33.10	9.73	42.83	54.21	-11.38	AVG
3	0.4335	34.95	9.75	44.70	57.19	-12.49	QP
4	0.4335	22.60	9.75	32.35	47.19	-14.84	AVG
5	0.6000	34.97	9.76	44.73	56.00	-11.27	QP
6	0.6000	23.30	9.76	33.06	46.00	-12.94	AVG
7	1.0635	34.45	9.78	44.23	56.00	-11.77	QP
8	1.0635	23.40	9.78	33.18	46.00	-12.82	AVG
9	5.2845	31.91	9.92	41.83	60.00	-18.17	QP
10	5.2845	20.80	9.92	30.72	50.00	-19.28	AVG
11 *	12.9705	41.50	10.22	51.72	60.00	-8.28	QP
12	12.9705	29.40	10.22	39.62	50.00	-10.38	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

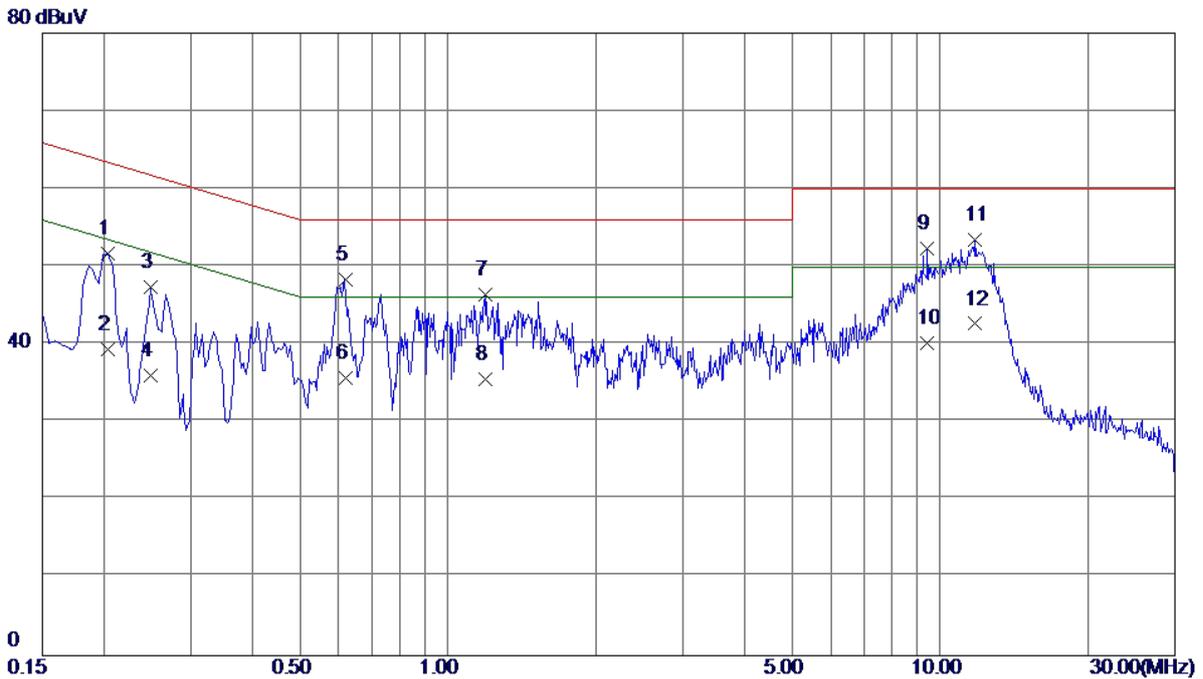


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2040	41.98	9.65	51.63	63.45	-11.82	QP
2	0.2040	29.70	9.65	39.35	53.45	-14.10	AVG
3	0.2490	37.72	9.63	47.35	61.79	-14.44	QP
4	0.2490	26.30	9.63	35.93	51.79	-15.86	AVG
5	0.6180	38.72	9.66	48.38	56.00	-7.62	QP
6	0.6180	26.10	9.66	35.76	46.00	-10.24	AVG
7	1.1895	36.71	9.68	46.39	56.00	-9.61	QP
8	1.1895	25.90	9.68	35.58	46.00	-10.42	AVG
9	9.4200	42.38	10.01	52.39	60.00	-7.61	QP
10	9.4200	30.19	10.01	40.20	50.00	-9.80	AVG
11 *	11.7690	43.24	10.14	53.38	60.00	-6.62	QP
12	11.7690	32.50	10.14	42.64	50.00	-7.36	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

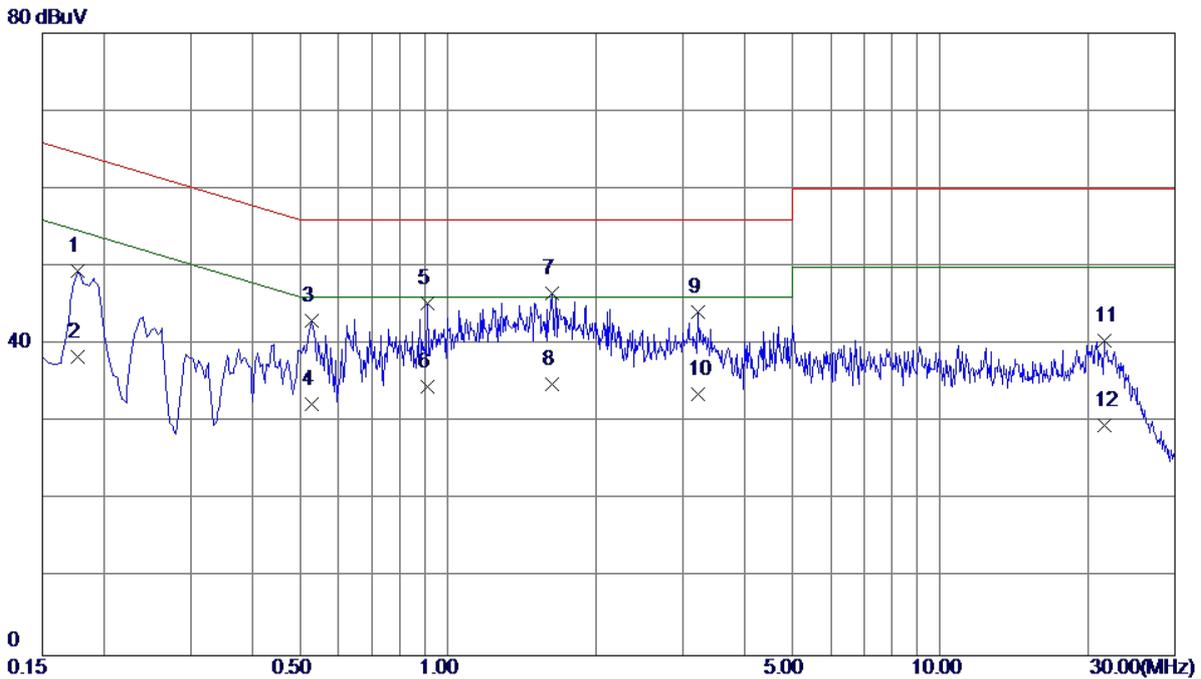


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1770	39.76	9.74	49.50	64.63	-15.13	QP
2	0.1770	28.60	9.74	38.34	54.63	-16.29	AVG
3	0.5280	33.34	9.76	43.10	56.00	-12.90	QP
4	0.5280	22.50	9.76	32.26	46.00	-13.74	AVG
5	0.9105	35.56	9.78	45.34	56.00	-10.66	QP
6	0.9105	24.81	9.78	34.59	46.00	-11.41	AVG
7 *	1.6260	36.74	9.81	46.55	56.00	-9.45	QP
8	1.6260	25.10	9.81	34.91	46.00	-11.09	AVG
9	3.2145	34.25	9.87	44.12	56.00	-11.88	QP
10	3.2145	23.70	9.87	33.57	46.00	-12.43	AVG
11	21.5970	30.12	10.34	40.46	60.00	-19.54	QP
12	21.5970	19.30	10.34	29.64	50.00	-20.36	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

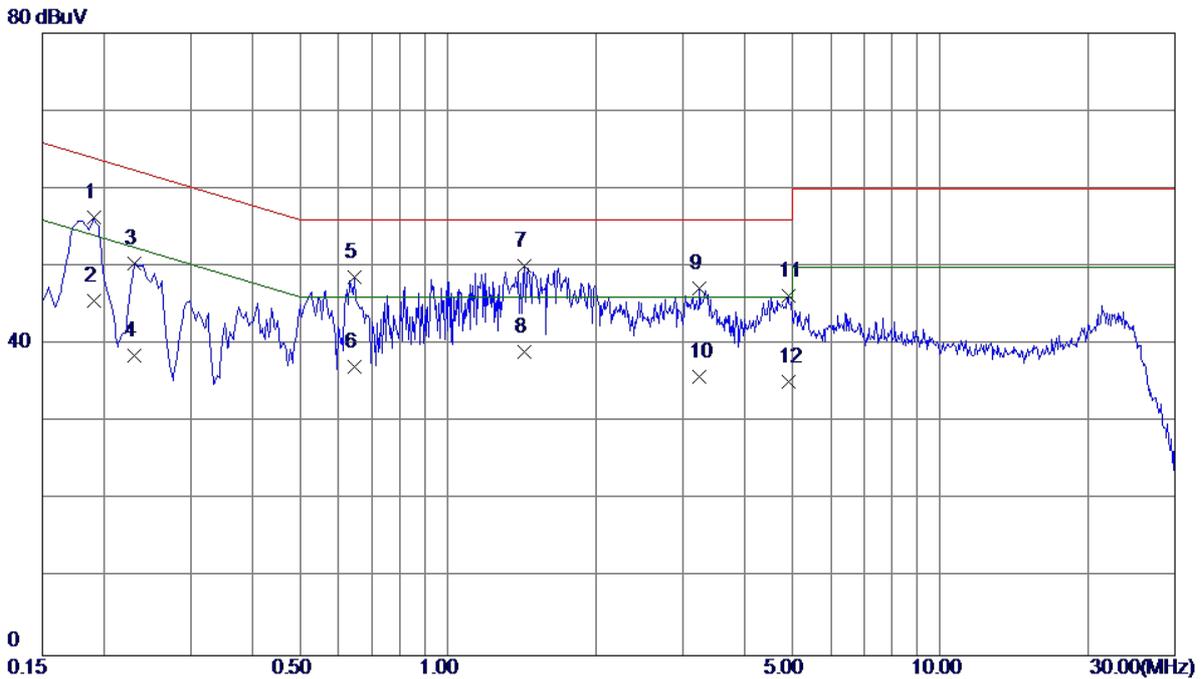


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1905	46.62	9.65	56.27	64.01	-7.74	QP
2	0.1905	35.90	9.65	45.55	54.01	-8.46	AVG
3	0.2310	40.79	9.64	50.43	62.41	-11.98	QP
4	0.2310	28.90	9.64	38.54	52.41	-13.87	AVG
5	0.6450	38.99	9.66	48.65	56.00	-7.35	QP
6	0.6450	27.40	9.66	37.06	46.00	-8.94	AVG
7 *	1.4280	40.40	9.69	50.09	56.00	-5.91	QP
8	1.4280	29.40	9.69	39.09	46.00	-6.91	AVG
9	3.2505	37.35	9.78	47.13	56.00	-8.87	QP
10	3.2505	26.11	9.78	35.89	46.00	-10.11	AVG
11	4.9110	36.35	9.84	46.19	56.00	-9.81	QP
12	4.9110	25.30	9.84	35.14	46.00	-10.86	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

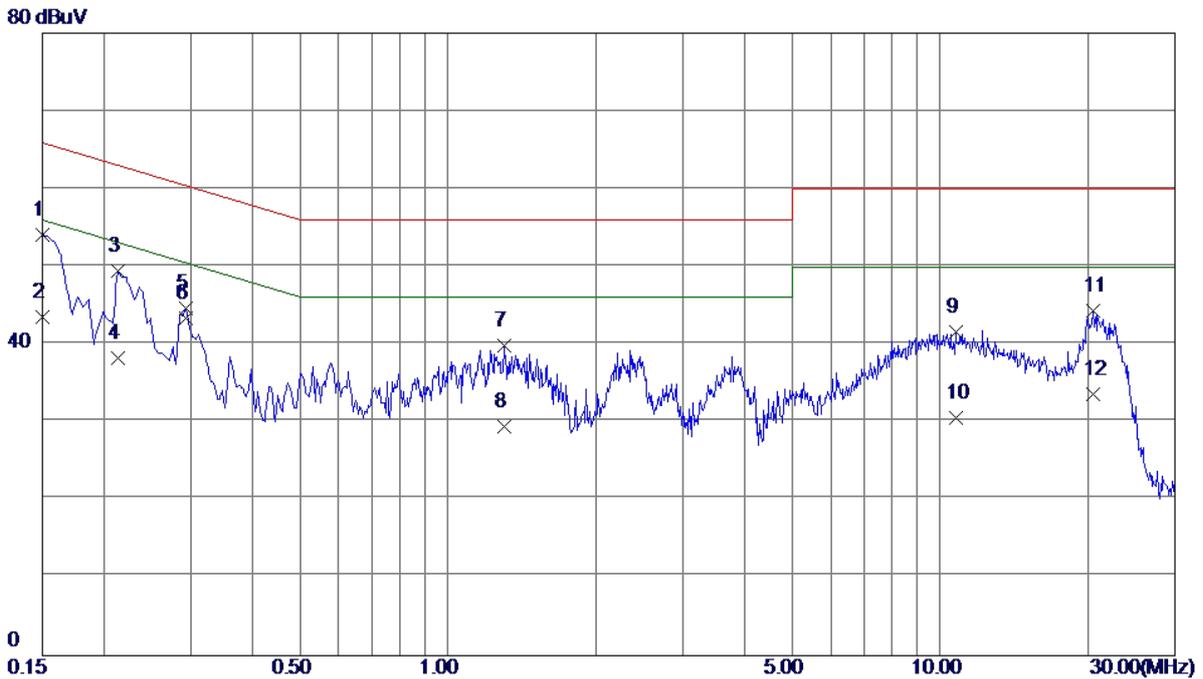


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	44.29	9.75	54.04	66.00	-11.96	QP
2	0.1500	33.80	9.75	43.55	56.00	-12.45	AVG
3	0.2130	39.72	9.72	49.44	63.09	-13.65	QP
4	0.2130	28.50	9.72	38.22	53.09	-14.87	AVG
5	0.2940	34.99	9.72	44.71	60.41	-15.70	QP
6 *	0.2940	33.60	9.72	43.32	50.41	-7.09	AVG
7	1.3020	30.03	9.80	39.83	56.00	-16.17	QP
8	1.3020	19.70	9.80	29.50	46.00	-16.50	AVG
9	10.7520	31.55	10.11	41.66	60.00	-18.34	QP
10	10.7520	20.41	10.11	30.52	50.00	-19.48	AVG
11	20.4225	34.00	10.32	44.32	60.00	-15.68	QP
12	20.4225	23.29	10.32	33.61	50.00	-16.39	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

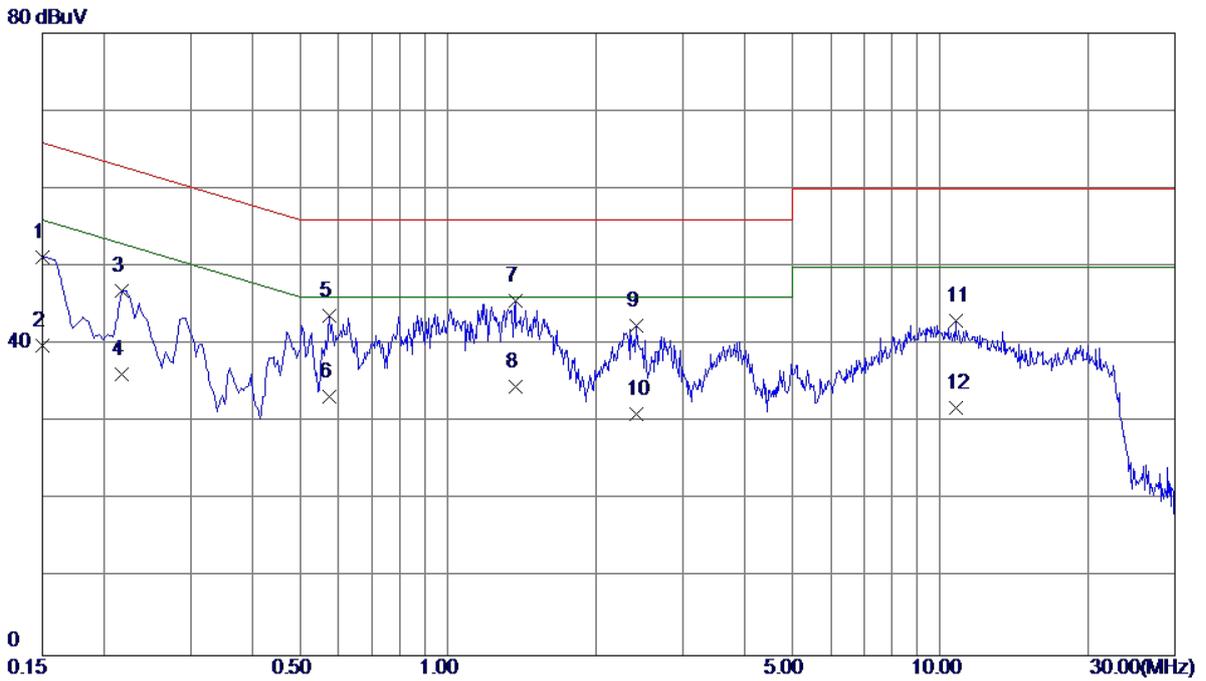


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	41.60	9.64	51.24	66.00	-14.76	QP
2	0.1500	30.20	9.64	39.84	56.00	-16.16	AVG
3	0.2175	37.30	9.65	46.95	62.91	-15.96	QP
4	0.2175	26.49	9.65	36.14	52.91	-16.77	AVG
5	0.5730	34.06	9.66	43.72	56.00	-12.28	QP
6	0.5730	23.60	9.66	33.26	46.00	-12.74	AVG
7 *	1.3695	35.88	9.69	45.57	56.00	-10.43	QP
8	1.3695	24.80	9.69	34.49	46.00	-11.51	AVG
9	2.4090	32.72	9.74	42.46	56.00	-13.54	QP
10	2.4090	21.30	9.74	31.04	46.00	-14.96	AVG
11	10.7790	32.90	10.08	42.98	60.00	-17.02	QP
12	10.7790	21.70	10.08	31.78	50.00	-18.22	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

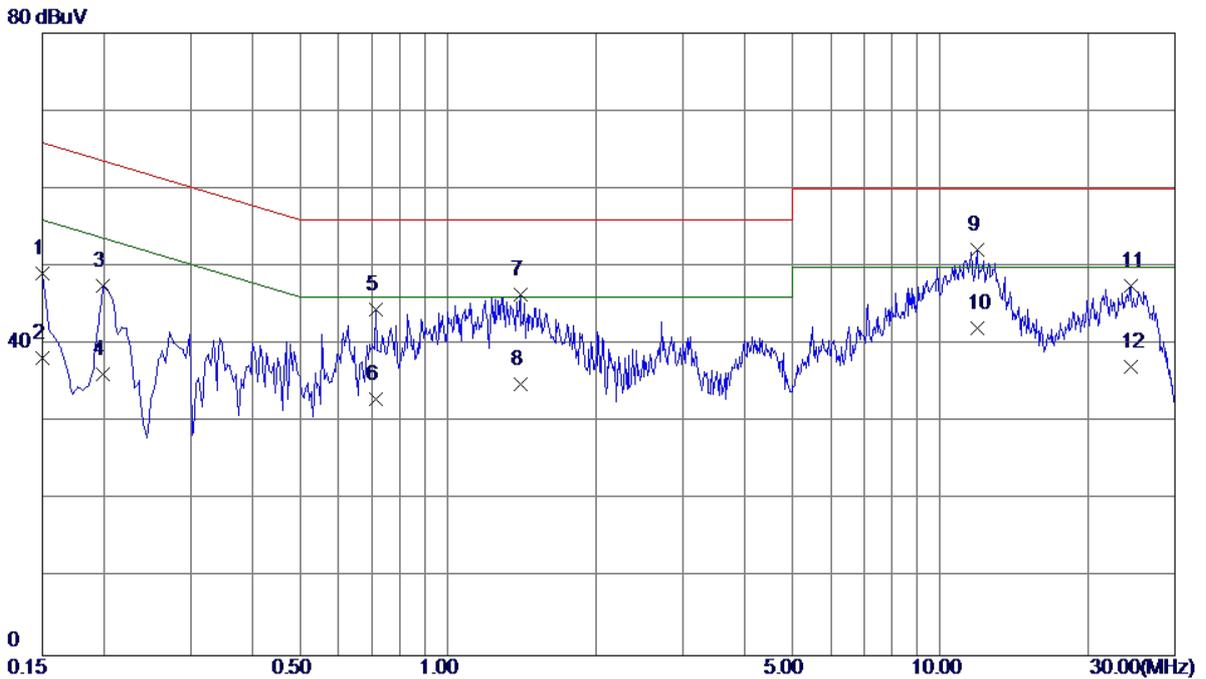

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	39.37	9.75	49.12	66.00	-16.88	QP
2	0.1500	28.50	9.75	38.25	56.00	-17.75	AVG
3	0.1995	37.80	9.72	47.52	63.63	-16.11	QP
4	0.1995	26.40	9.72	36.12	53.63	-17.51	AVG
5	0.7125	34.72	9.77	44.49	56.00	-11.51	QP
6	0.7125	23.20	9.77	32.97	46.00	-13.03	AVG
7	1.4010	36.64	9.81	46.45	56.00	-9.55	QP
8	1.4010	25.10	9.81	34.91	46.00	-11.09	AVG
9 *	11.9130	42.01	10.17	52.18	60.00	-7.82	QP
10	11.9130	31.90	10.17	42.07	50.00	-7.93	AVG
11	24.3690	37.17	10.39	47.56	60.00	-12.44	QP
12	24.3690	26.80	10.39	37.19	50.00	-12.81	AVG


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

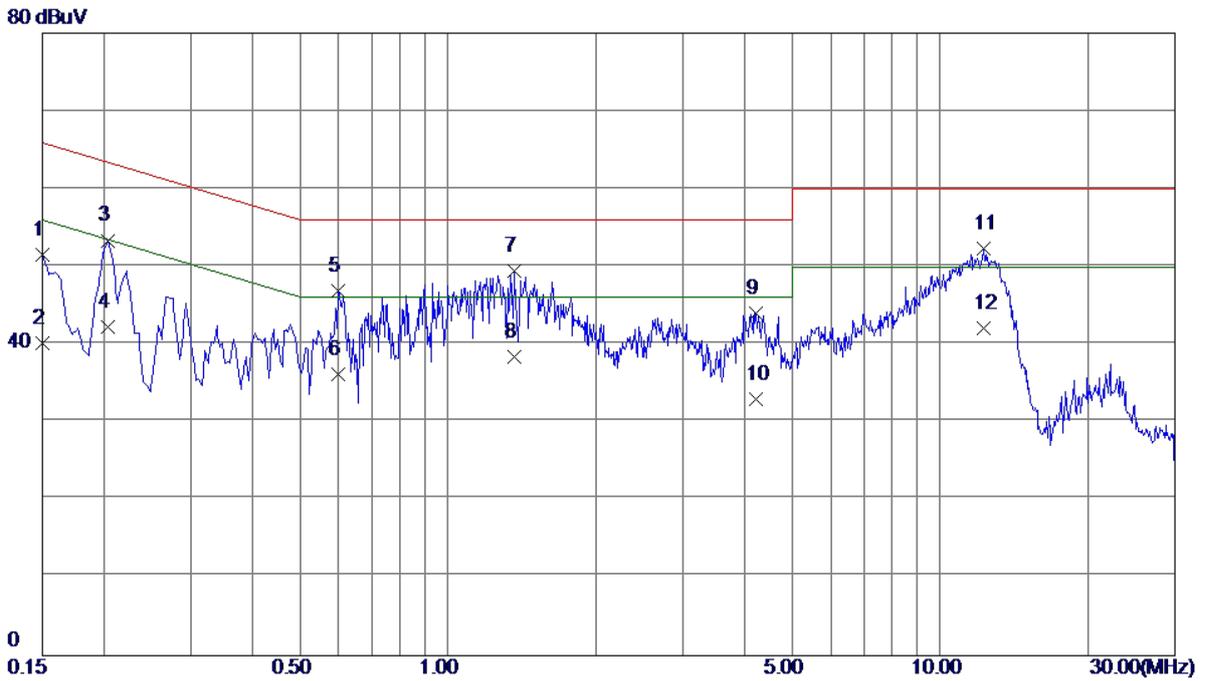

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1500	41.85	9.64	51.49	66.00	-14.51	QP
2	0.1500	30.50	9.64	40.14	56.00	-15.86	AVG
3	0.2040	43.71	9.65	53.36	63.45	-10.09	QP
4	0.2040	32.60	9.65	42.25	53.45	-11.20	AVG
5	0.6000	37.15	9.66	46.81	56.00	-9.19	QP
6	0.6000	26.50	9.66	36.16	46.00	-9.84	AVG
7 *	1.3650	39.80	9.69	49.49	56.00	-6.51	QP
8	1.3650	28.70	9.69	38.39	46.00	-7.61	AVG
9	4.2315	34.25	9.82	44.07	56.00	-11.93	QP
10	4.2315	23.09	9.82	32.91	46.00	-13.09	AVG
11	12.2325	42.22	10.17	52.39	60.00	-7.61	QP
12	12.2325	31.90	10.17	42.07	50.00	-7.93	AVG


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

80 dBuV

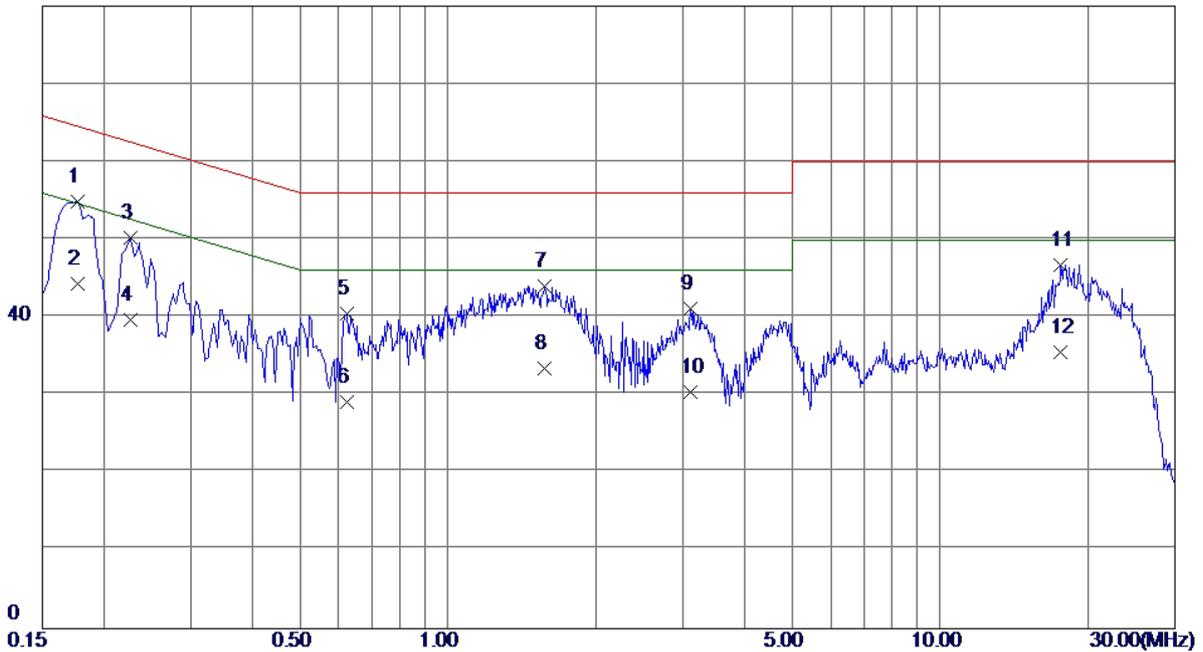


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1770	45.16	9.74	54.90	64.63	-9.73	QP
2	0.1770	34.60	9.74	44.34	54.63	-10.29	AVG
3	0.2265	40.49	9.72	50.21	62.58	-12.37	QP
4	0.2265	29.90	9.72	39.62	52.58	-12.96	AVG
5	0.6224	30.71	9.76	40.47	56.00	-15.53	QP
6	0.6224	19.30	9.76	29.06	46.00	-16.94	AVG
7	1.5720	34.25	9.81	44.06	56.00	-11.94	QP
8	1.5720	23.61	9.81	33.42	46.00	-12.58	AVG
9	3.1155	31.29	9.87	41.16	56.00	-14.84	QP
10	3.1155	20.50	9.87	30.37	46.00	-15.63	AVG
11	17.5920	36.46	10.31	46.77	60.00	-13.23	QP
12	17.5920	25.20	10.31	35.51	50.00	-14.49	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

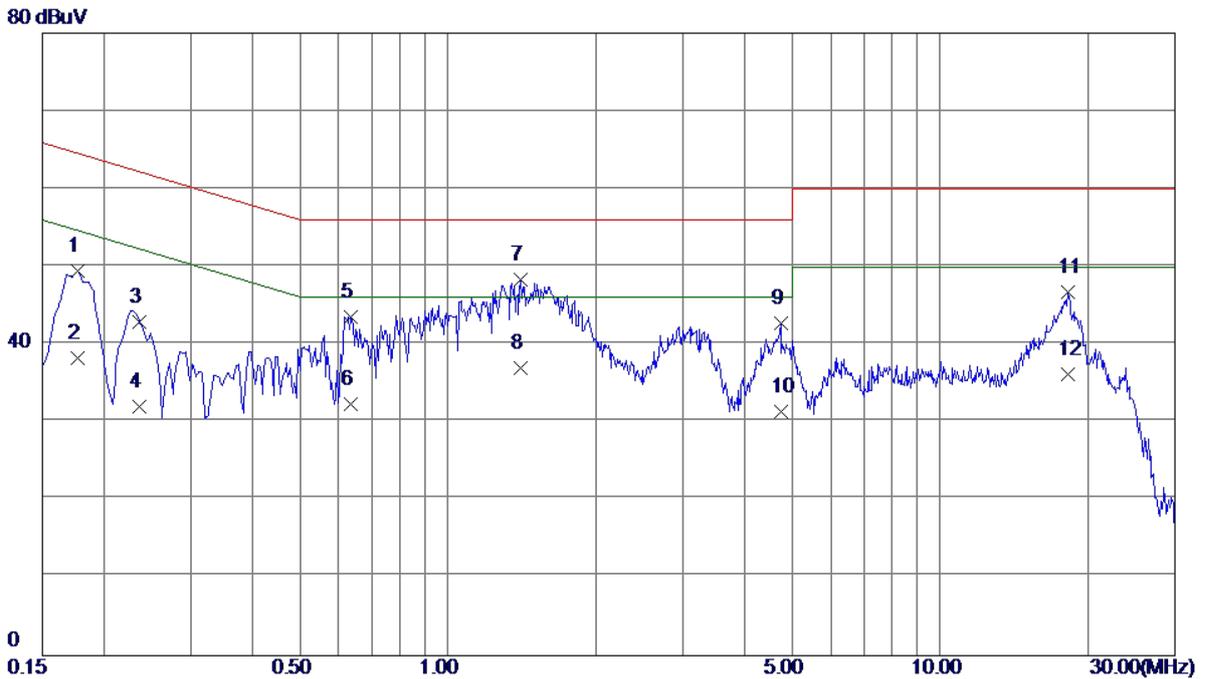


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1770	39.80	9.64	49.44	64.63	-15.19	QP
2	0.1770	28.60	9.64	38.24	54.63	-16.39	AVG
3	0.2366	33.26	9.64	42.90	62.21	-19.31	QP
4	0.2366	22.40	9.64	32.04	52.21	-20.17	AVG
5	0.6360	33.84	9.66	43.50	56.00	-12.50	QP
6	0.6360	22.60	9.66	32.26	46.00	-13.74	AVG
7 *	1.4055	38.61	9.69	48.30	56.00	-7.70	QP
8	1.4055	27.20	9.69	36.89	46.00	-9.11	AVG
9	4.7399	32.91	9.83	42.74	56.00	-13.26	QP
10	4.7399	21.50	9.83	31.33	46.00	-14.67	AVG
11	18.2040	36.40	10.38	46.78	60.00	-13.22	QP
12	18.2040	25.80	10.38	36.18	50.00	-13.82	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

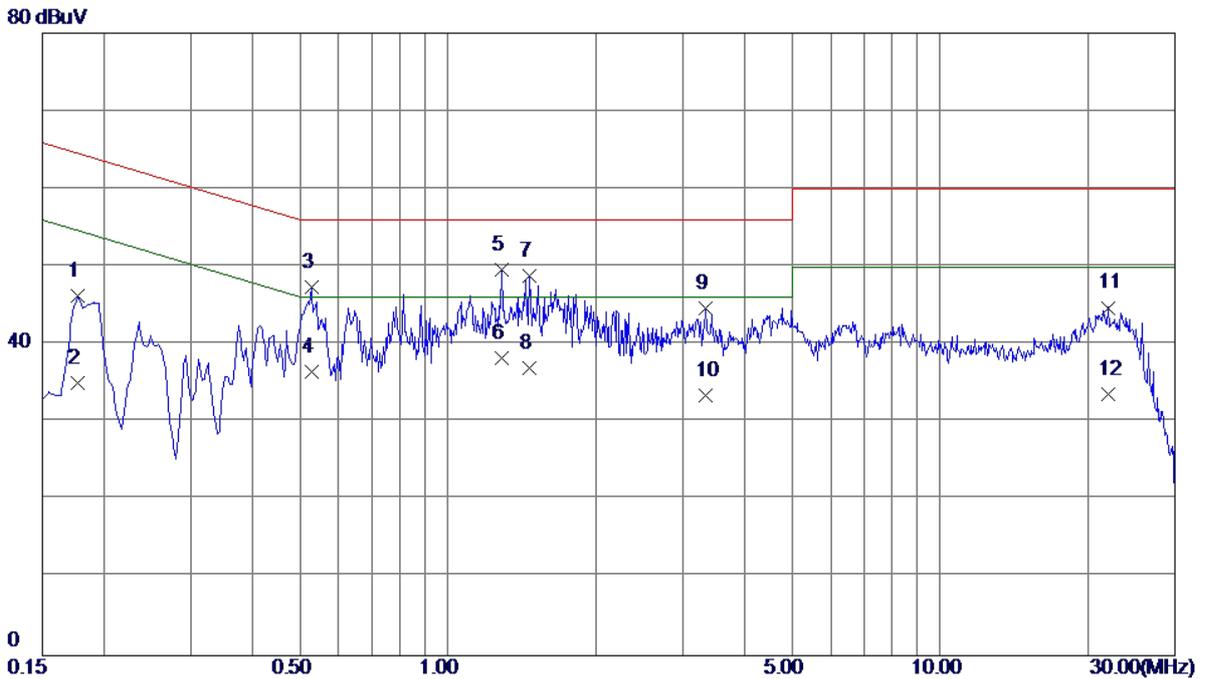


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1770	36.50	9.74	46.24	64.63	-18.39	QP
2	0.1770	25.30	9.74	35.04	54.63	-19.59	AVG
3	0.5280	37.54	9.76	47.30	56.00	-8.70	QP
4	0.5280	26.70	9.76	36.46	46.00	-9.54	AVG
5 *	1.2885	39.79	9.80	49.59	56.00	-6.41	QP
6	1.2885	28.50	9.80	38.30	46.00	-7.70	AVG
7	1.4640	38.93	9.81	48.74	56.00	-7.26	QP
8	1.4640	27.10	9.81	36.91	46.00	-9.09	AVG
9	3.3360	34.83	9.87	44.70	56.00	-11.30	QP
10	3.3360	23.61	9.87	33.48	46.00	-12.52	AVG
11	22.0155	34.37	10.35	44.72	60.00	-15.28	QP
12	22.0155	23.20	10.35	33.55	50.00	-16.45	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

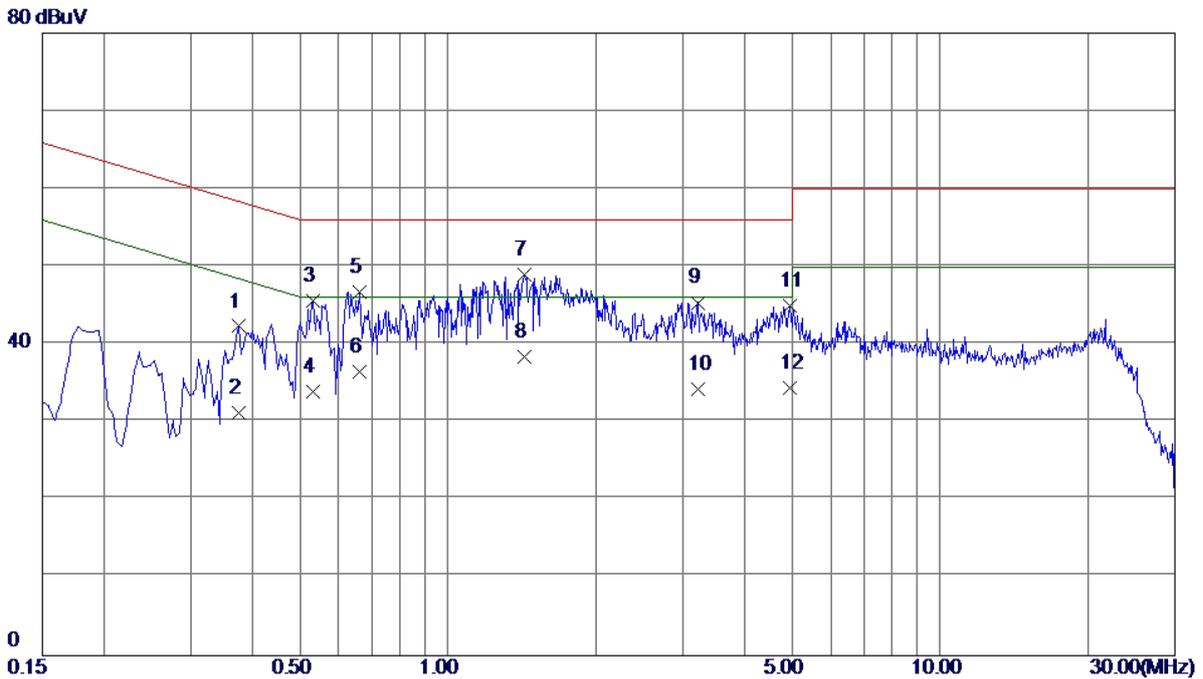


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.3750	32.67	9.65	42.32	58.39	-16.07	QP
2	0.3750	21.50	9.65	31.15	48.39	-17.24	AVG
3	0.5324	35.87	9.66	45.53	56.00	-10.47	QP
4	0.5324	24.20	9.66	33.86	46.00	-12.14	AVG
5	0.6630	37.13	9.66	46.79	56.00	-9.21	QP
6	0.6630	26.80	9.66	36.46	46.00	-9.54	AVG
7 *	1.4280	39.33	9.69	49.02	56.00	-6.98	QP
8	1.4280	28.70	9.69	38.39	46.00	-7.61	AVG
9	3.2190	35.58	9.78	45.36	56.00	-10.64	QP
10	3.2190	24.49	9.78	34.27	46.00	-11.73	AVG
11	4.9425	35.16	9.84	45.00	56.00	-11.00	QP
12	4.9425	24.60	9.84	34.44	46.00	-11.56	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

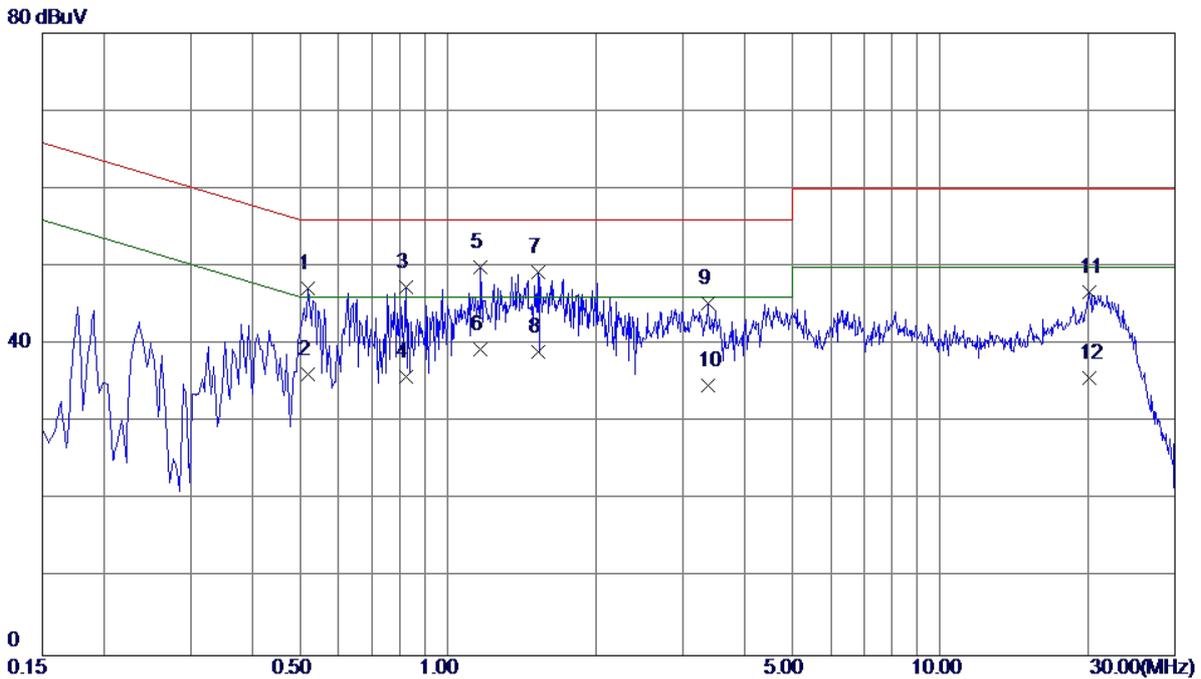


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5190	37.38	9.76	47.14	56.00	-8.86	QP
2	0.5190	26.40	9.76	36.16	46.00	-9.84	AVG
3	0.8205	37.65	9.77	47.42	56.00	-8.58	QP
4	0.8205	26.09	9.77	35.86	46.00	-10.14	AVG
5 *	1.1670	40.17	9.79	49.96	56.00	-6.04	QP
6	1.1670	29.61	9.79	39.40	46.00	-6.60	AVG
7	1.5224	39.40	9.81	49.21	56.00	-6.79	QP
8	1.5224	29.21	9.81	39.02	46.00	-6.98	AVG
9	3.3675	35.46	9.87	45.33	56.00	-10.67	QP
10	3.3675	24.91	9.87	34.78	46.00	-11.22	AVG
11	20.0760	36.46	10.31	46.77	60.00	-13.23	QP
12	20.0760	25.30	10.31	35.61	50.00	-14.39	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

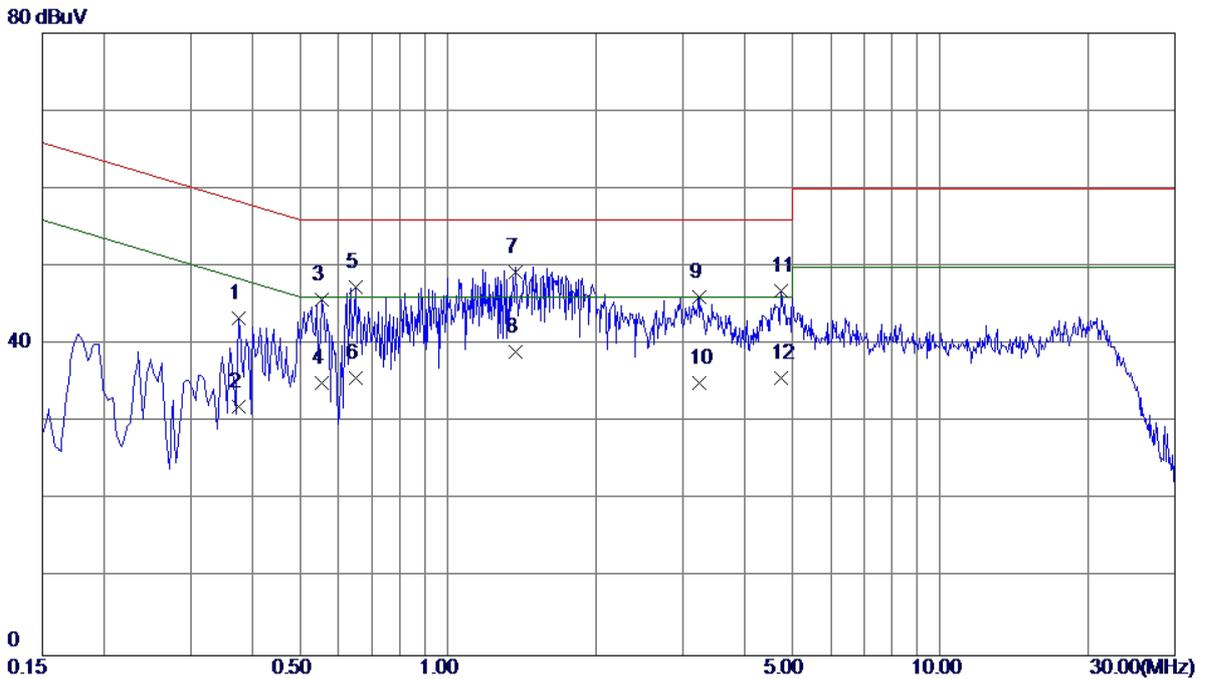


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.3750	33.77	9.65	43.42	58.39	-14.97	QP
2	0.3750	22.30	9.65	31.95	48.39	-16.44	AVG
3	0.5550	36.15	9.66	45.81	56.00	-10.19	QP
4	0.5550	25.40	9.66	35.06	46.00	-10.94	AVG
5	0.6493	37.63	9.66	47.29	56.00	-8.71	QP
6	0.6493	26.10	9.66	35.76	46.00	-10.24	AVG
7 *	1.3692	39.63	9.69	49.32	56.00	-6.68	QP
8	1.3692	29.40	9.69	39.09	46.00	-6.91	AVG
9	3.2370	36.23	9.78	46.01	56.00	-9.99	QP
10	3.2370	25.19	9.78	34.97	46.00	-11.03	AVG
11	4.7625	37.00	9.83	46.83	56.00	-9.17	QP
12	4.7625	25.81	9.83	35.64	46.00	-10.36	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

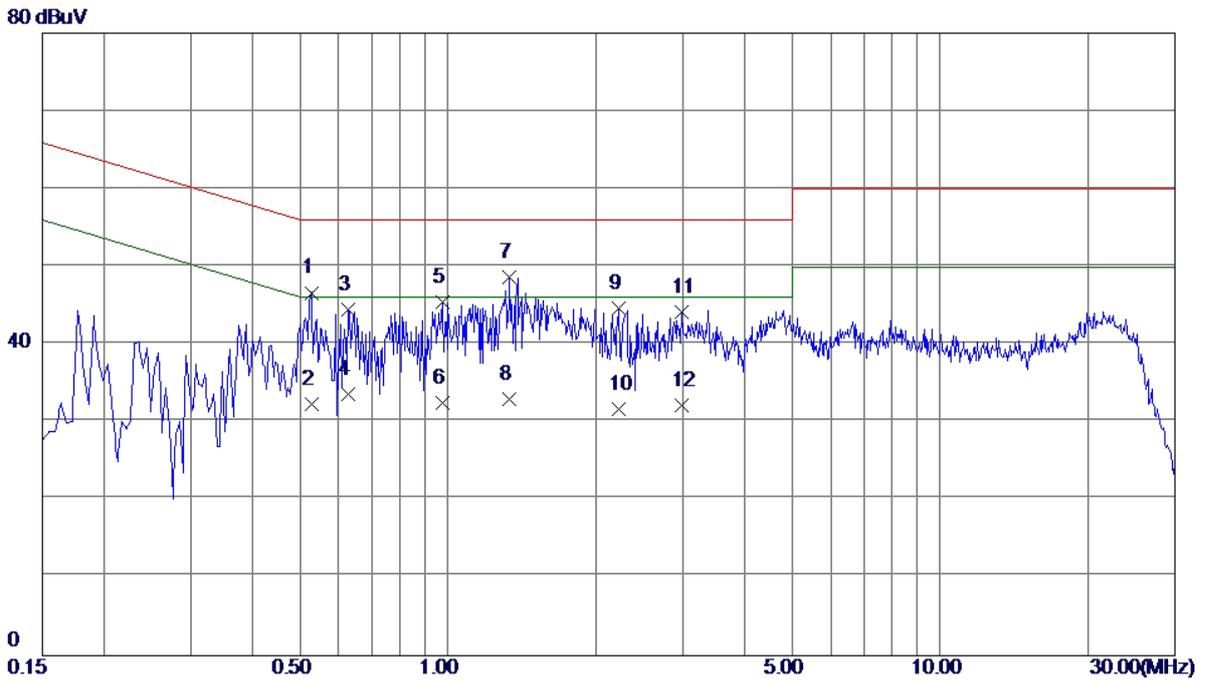


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5280	36.88	9.76	46.64	56.00	-9.36	QP
2	0.5280	22.50	9.76	32.26	46.00	-13.74	AVG
3	0.6270	34.65	9.76	44.41	56.00	-11.59	QP
4	0.6270	23.80	9.76	33.56	46.00	-12.44	AVG
5	0.9735	35.61	9.77	45.38	56.00	-10.62	QP
6	0.9735	22.71	9.77	32.48	46.00	-13.52	AVG
7 *	1.3335	38.79	9.80	48.59	56.00	-7.41	QP
8	1.3335	23.10	9.80	32.90	46.00	-13.10	AVG
9	2.2290	34.87	9.83	44.70	56.00	-11.30	QP
10	2.2290	21.90	9.83	31.73	46.00	-14.27	AVG
11	2.9805	34.35	9.87	44.22	56.00	-11.78	QP
12	2.9805	22.30	9.87	32.17	46.00	-13.83	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

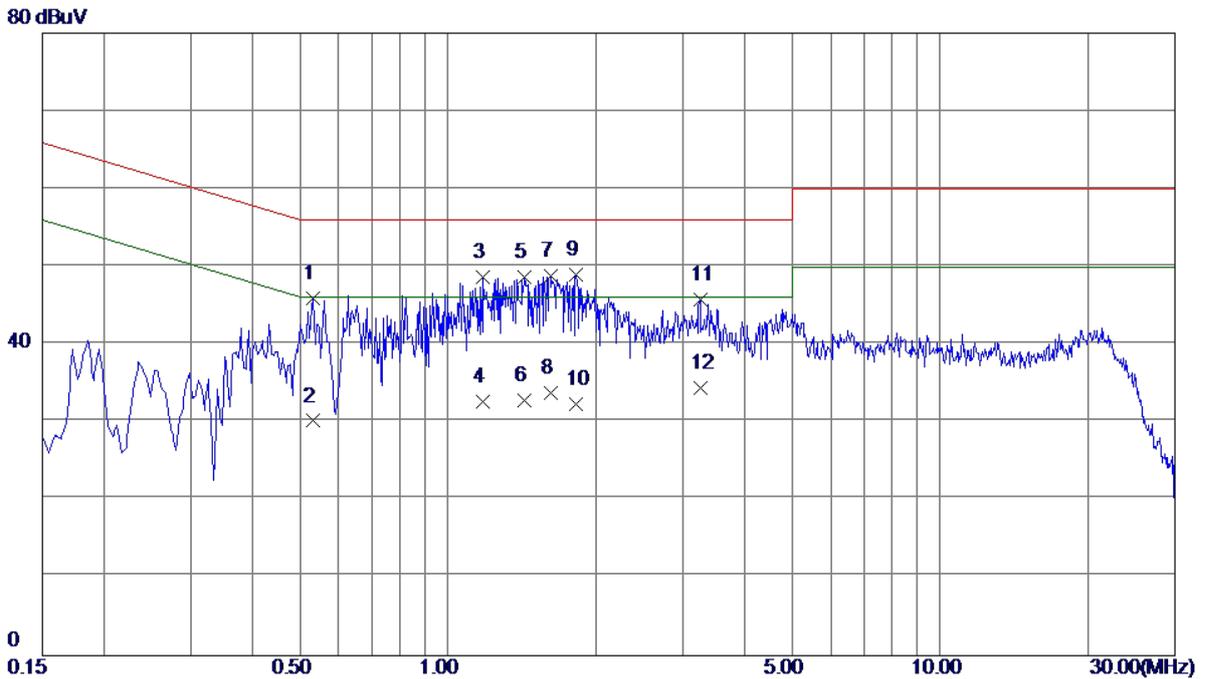


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector
1	0.5325	36.22	9.66	45.88	56.00	-10.12	QP
2	0.5325	20.50	9.66	30.16	46.00	-15.84	AVG
3	1.1805	38.91	9.68	48.59	56.00	-7.41	QP
4	1.1805	22.90	9.68	32.58	46.00	-13.42	AVG
5	1.4280	38.92	9.69	48.61	56.00	-7.39	QP
6	1.4280	23.10	9.69	32.79	46.00	-13.21	AVG
7	1.6170	39.16	9.71	48.87	56.00	-7.13	QP
8	1.6170	24.00	9.71	33.71	46.00	-12.29	AVG
9 *	1.8240	39.29	9.72	49.01	56.00	-6.99	QP
10	1.8240	22.60	9.72	32.32	46.00	-13.68	AVG
11	3.2550	35.95	9.78	45.73	56.00	-10.27	QP
12	3.2550	24.61	9.78	34.39	46.00	-11.61	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

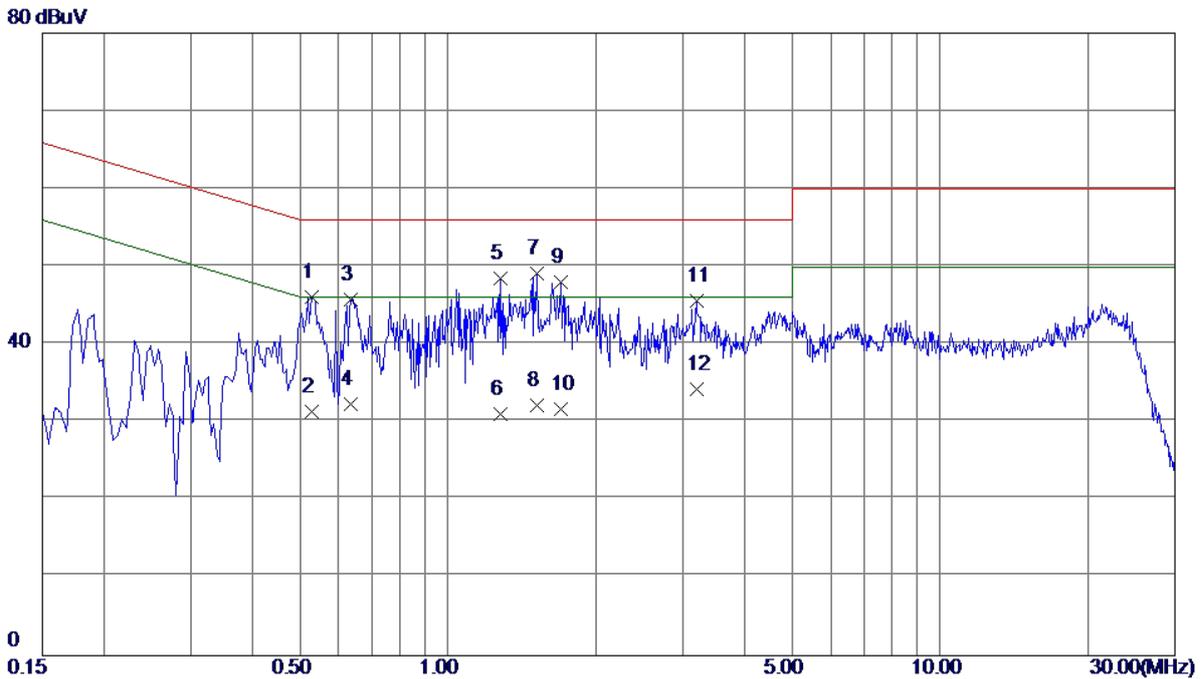


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5280	36.34	9.76	46.10	56.00	-9.90	QP
2	0.5280	21.60	9.76	31.36	46.00	-14.64	AVG
3	0.6360	36.00	9.76	45.76	56.00	-10.24	QP
4	0.6360	22.50	9.76	32.26	46.00	-13.74	AVG
5	1.2750	38.71	9.80	48.51	56.00	-7.49	QP
6	1.2750	21.30	9.80	31.10	46.00	-14.90	AVG
7 *	1.5180	39.29	9.81	49.10	56.00	-6.90	QP
8	1.5180	22.41	9.81	32.22	46.00	-13.78	AVG
9	1.6980	38.26	9.81	48.07	56.00	-7.93	QP
10	1.6980	21.80	9.81	31.61	46.00	-14.39	AVG
11	3.2055	35.65	9.87	45.52	56.00	-10.48	QP
12	3.2055	24.30	9.87	34.17	46.00	-11.83	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

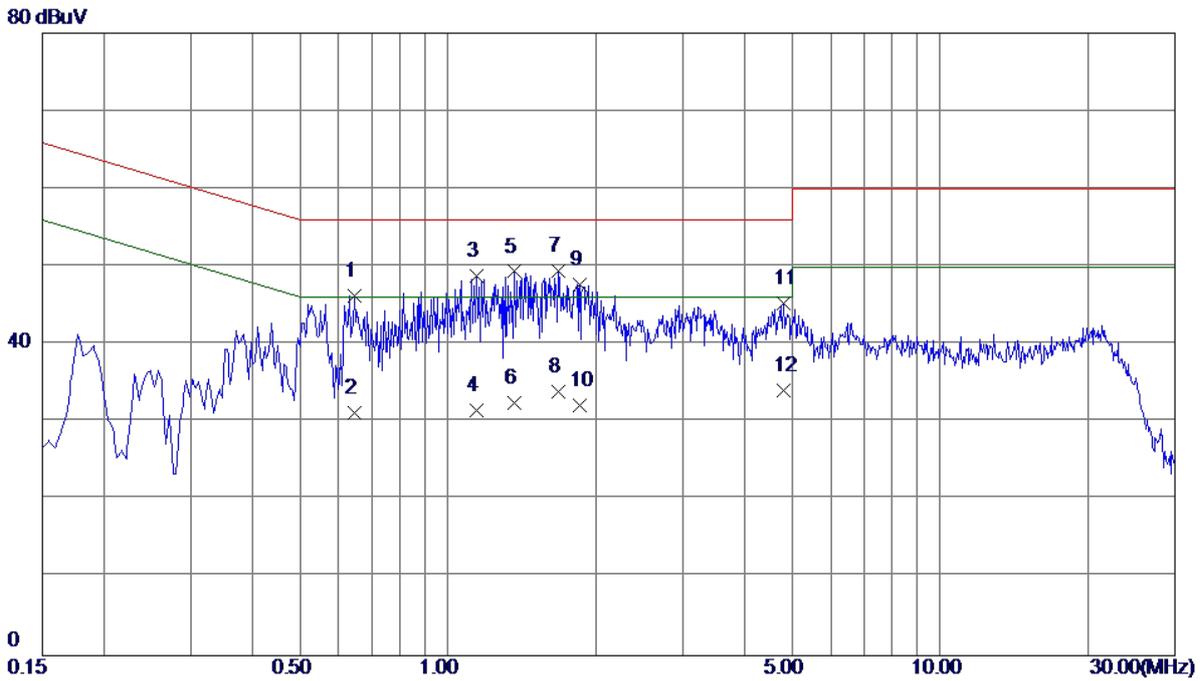

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.6450	36.53	9.66	46.19	56.00	-9.81	QP
2	0.6450	21.60	9.66	31.26	46.00	-14.74	AVG
3	1.1445	39.15	9.68	48.83	56.00	-7.17	QP
4	1.1445	21.89	9.68	31.57	46.00	-14.43	AVG
5	1.3650	39.67	9.69	49.36	56.00	-6.64	QP
6	1.3650	22.80	9.69	32.49	46.00	-13.51	AVG
7 *	1.6755	39.75	9.71	49.46	56.00	-6.54	QP
8	1.6755	24.20	9.71	33.91	46.00	-12.09	AVG
9	1.8555	37.92	9.73	47.65	56.00	-8.35	QP
10	1.8555	22.50	9.73	32.23	46.00	-13.77	AVG
11	4.8075	35.52	9.83	45.35	56.00	-10.65	QP
12	4.8075	24.31	9.83	34.14	46.00	-11.86	AVG


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

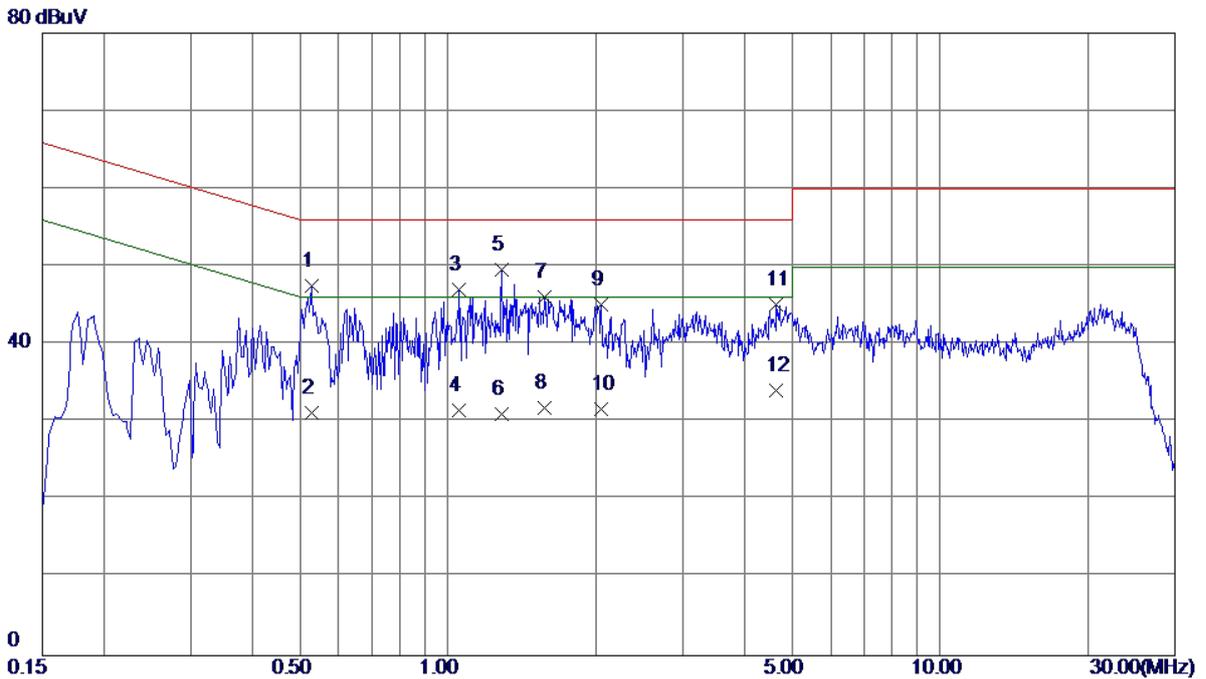

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5280	37.82	9.76	47.58	56.00	-8.42	QP
2	0.5280	21.50	9.76	31.26	46.00	-14.74	AVG
3	1.0545	37.24	9.78	47.02	56.00	-8.98	QP
4	1.0545	21.80	9.78	31.58	46.00	-14.42	AVG
5 *	1.2885	39.72	9.80	49.52	56.00	-6.48	QP
6	1.2885	21.30	9.80	31.10	46.00	-14.90	AVG
7	1.5720	36.26	9.81	46.07	56.00	-9.93	QP
8	1.5720	22.01	9.81	31.82	46.00	-14.18	AVG
9	2.0445	35.34	9.81	45.15	56.00	-10.85	QP
10	2.0445	21.90	9.81	31.71	46.00	-14.29	AVG
11	4.6500	35.29	9.90	45.19	56.00	-10.81	QP
12	4.6500	24.20	9.90	34.10	46.00	-11.90	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

80 dBuV

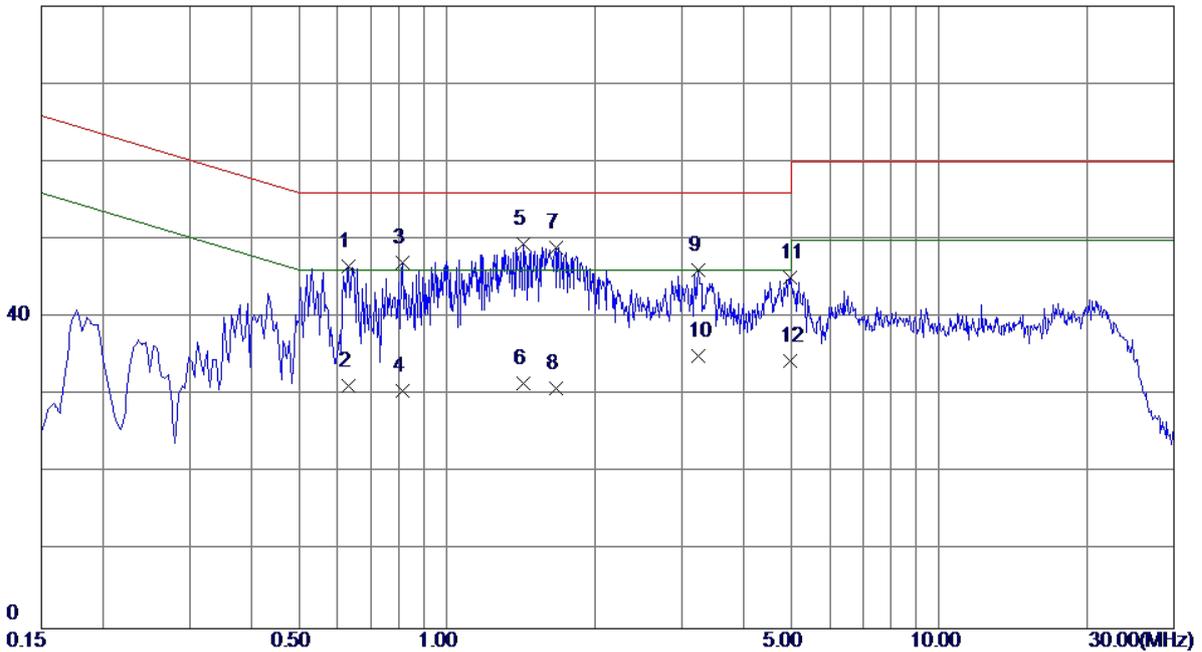

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.6315	36.88	9.66	46.54	56.00	-9.46	QP
2	0.6315	21.50	9.66	31.16	46.00	-14.84	AVG
3	0.8115	37.37	9.66	47.03	56.00	-8.97	QP
4	0.8115	20.90	9.66	30.56	46.00	-15.44	AVG
5 *	1.4280	39.77	9.69	49.46	56.00	-6.54	QP
6	1.4280	21.80	9.69	31.49	46.00	-14.51	AVG
7	1.6620	39.27	9.71	48.98	56.00	-7.02	QP
8	1.6620	21.20	9.71	30.91	46.00	-15.09	AVG
9	3.2415	36.25	9.78	46.03	56.00	-9.97	QP
10	3.2415	25.29	9.78	35.07	46.00	-10.93	AVG
11	4.9740	35.26	9.84	45.10	56.00	-10.90	QP
12	4.9740	24.50	9.84	34.34	46.00	-11.66	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B; ICES-003 Issue 6: 2016.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 26, 2018
2	Amplifier	HP	8447D	2944A09673	Oct. 20, 2017
3	Receiver	Agilent	N9038A	MY52130039	Aug. 20, 2018
4	Cable	emci	LMR-400(30 MHz-1GHz)(8 m+5m)	N/A	Jun. 26, 2018
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	Amplifier	Agilent	8449B	3008A02274	May. 16, 2018
9	Antenna	EM	EM-6876-1	230	Mar. 06, 2018
10	Cable	emci	EMC104-SM-SM-12000(12 m)	N/A	Jun. 26, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

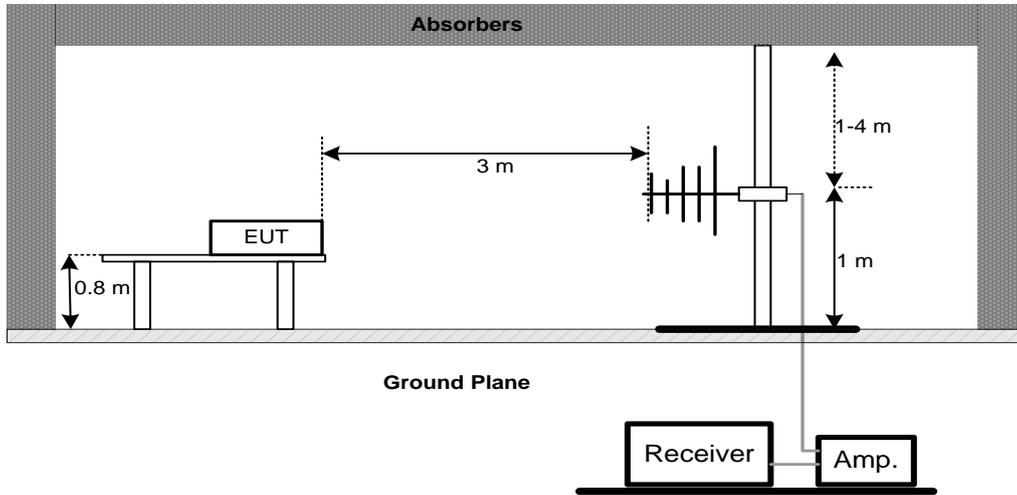

(B) Radiated Emission Test Set-Up Frequency 1 GHz

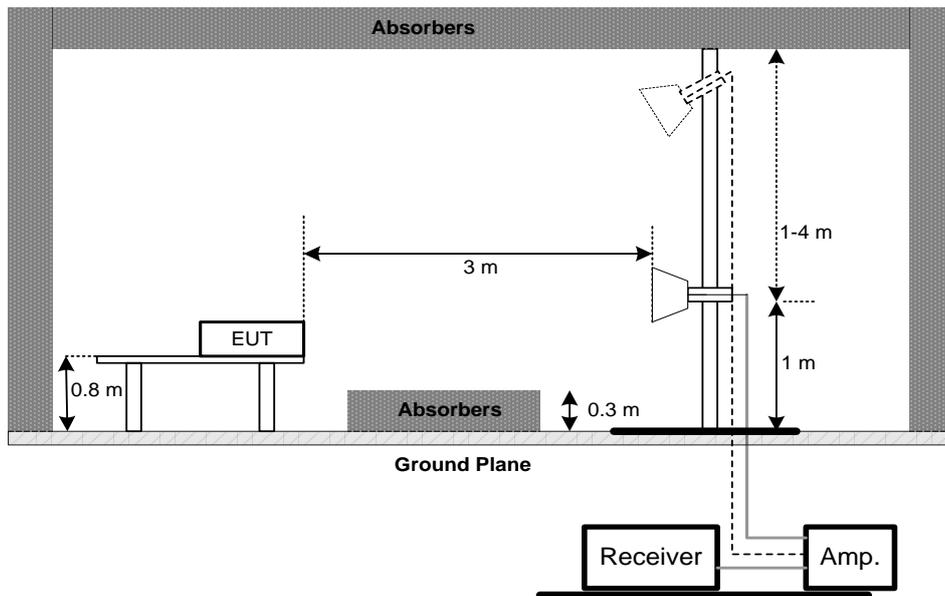


4.2.6 TEST RESULTS-BELOW 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:Coslight		
Test Engineer	Sam Wang		

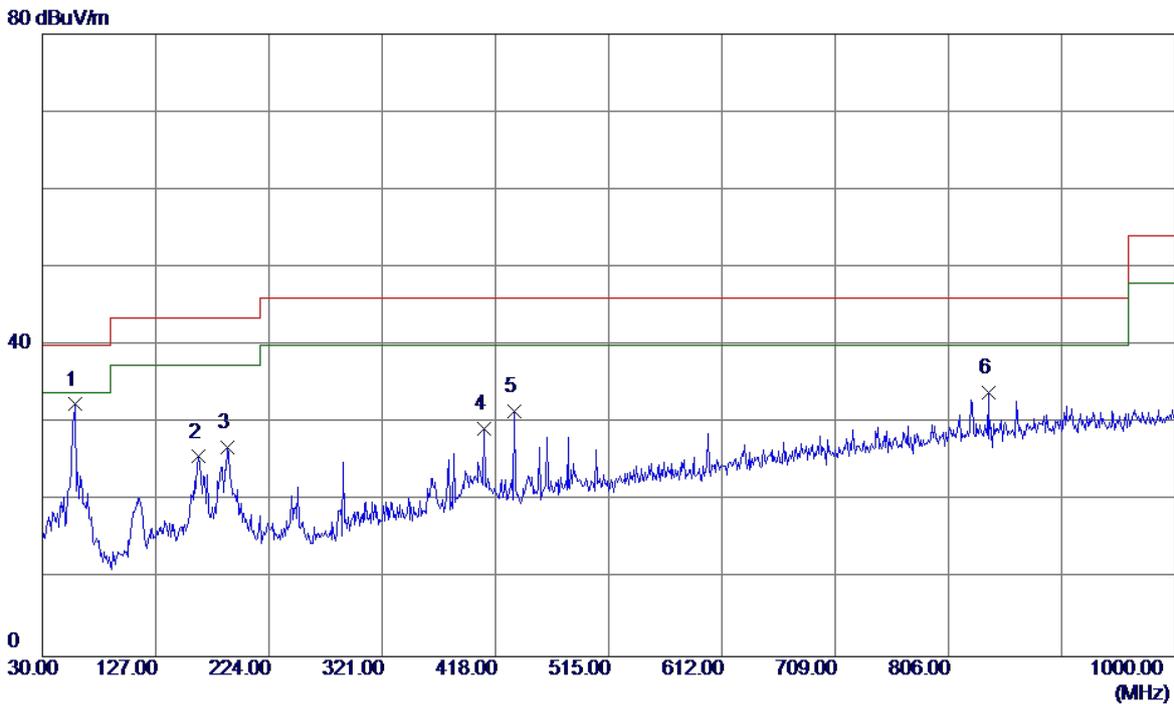


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	58.1300	45.21	-12.81	32.40	40.00	-7.60	QP
2	163.8600	37.06	-11.38	25.68	43.50	-17.82	QP
3	188.1100	38.38	-11.47	26.91	43.50	-16.59	QP
4	408.3000	37.12	-7.91	29.21	46.00	-16.79	QP
5	434.4900	38.78	-7.26	31.52	46.00	-14.48	QP
6	839.9500	32.22	1.73	33.95	46.00	-12.05	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:Coslight		
Test Engineer	Sam Wang		

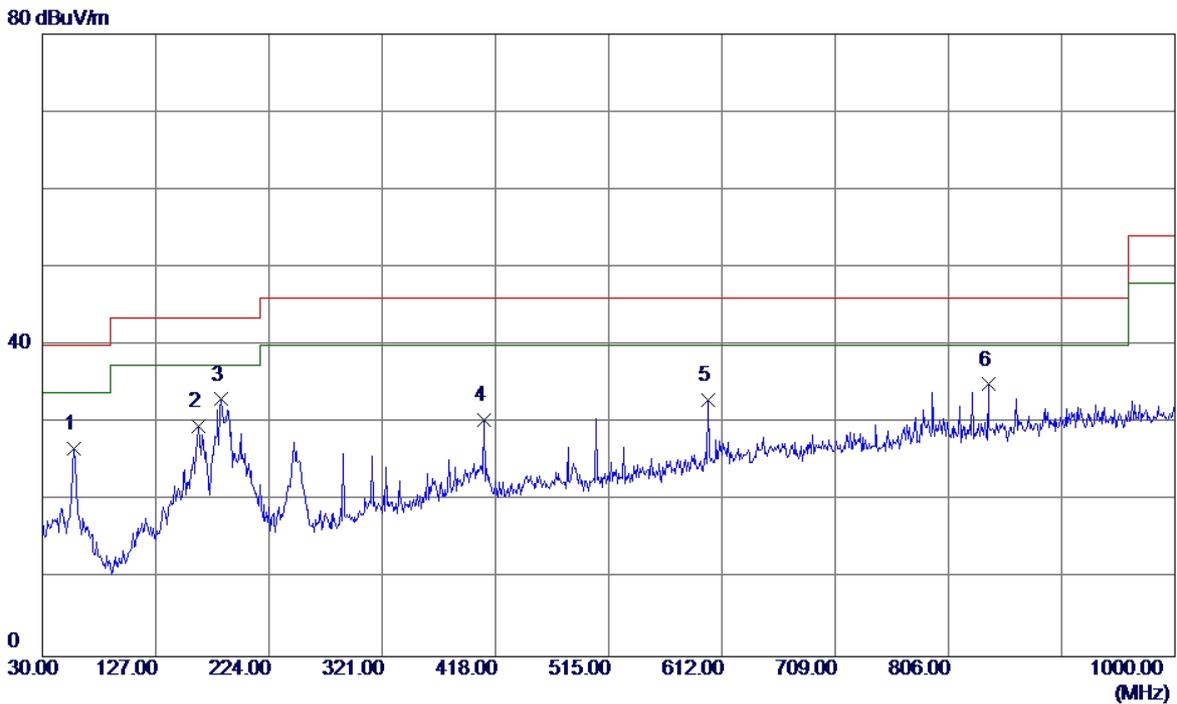


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	57.1600	39.24	-12.54	26.70	40.00	-13.30	QP
2	163.8600	40.97	-11.38	29.59	43.50	-13.91	QP
3 *	183.2600	44.49	-11.45	33.04	43.50	-10.46	QP
4	408.3000	38.25	-7.91	30.34	46.00	-15.66	QP
5	600.3600	36.56	-3.62	32.94	46.00	-13.06	QP
6	839.9500	33.23	1.73	34.96	46.00	-11.04	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:SCUD		
Test Engineer	Sam Wang		

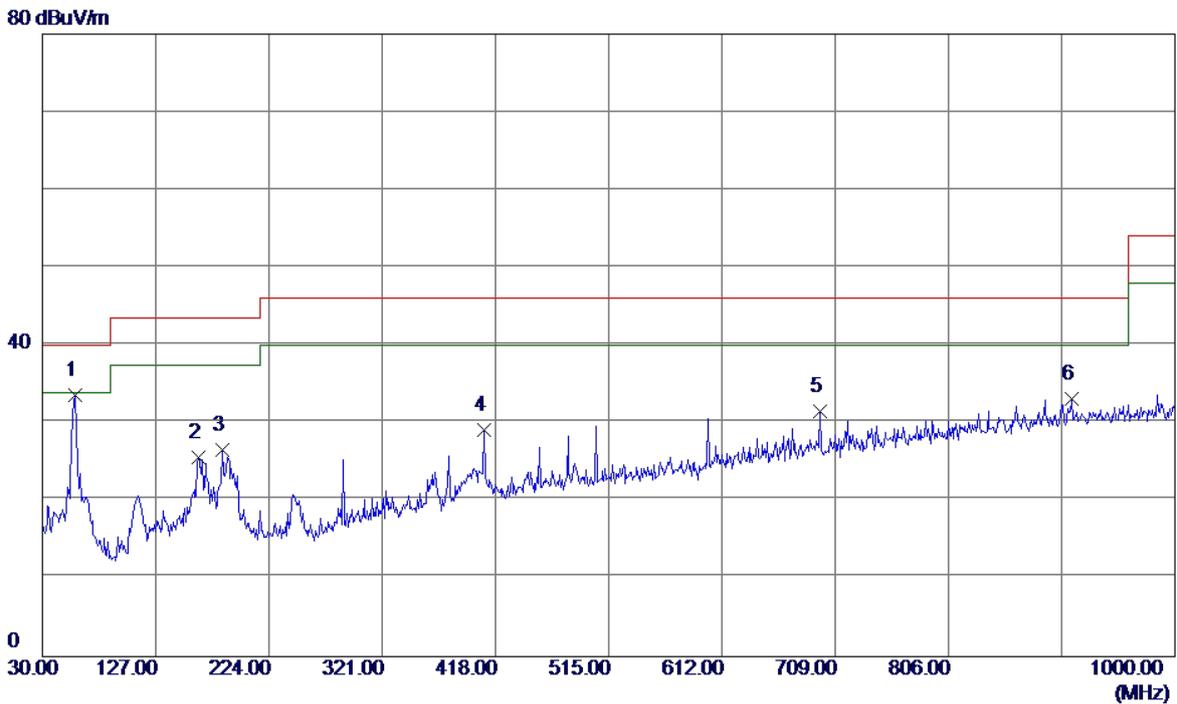


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	58.1300	46.37	-12.81	33.56	40.00	-6.44	QP
2	163.8600	36.92	-11.38	25.54	43.50	-17.96	QP
3	184.2300	37.99	-11.45	26.54	43.50	-16.96	QP
4	408.3000	37.02	-7.91	29.11	46.00	-16.89	QP
5	696.3900	32.47	-1.02	31.45	46.00	-14.55	QP
6	911.7300	30.05	3.05	33.10	46.00	-12.90	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:SCUD		
Test Engineer	Sam Wang		

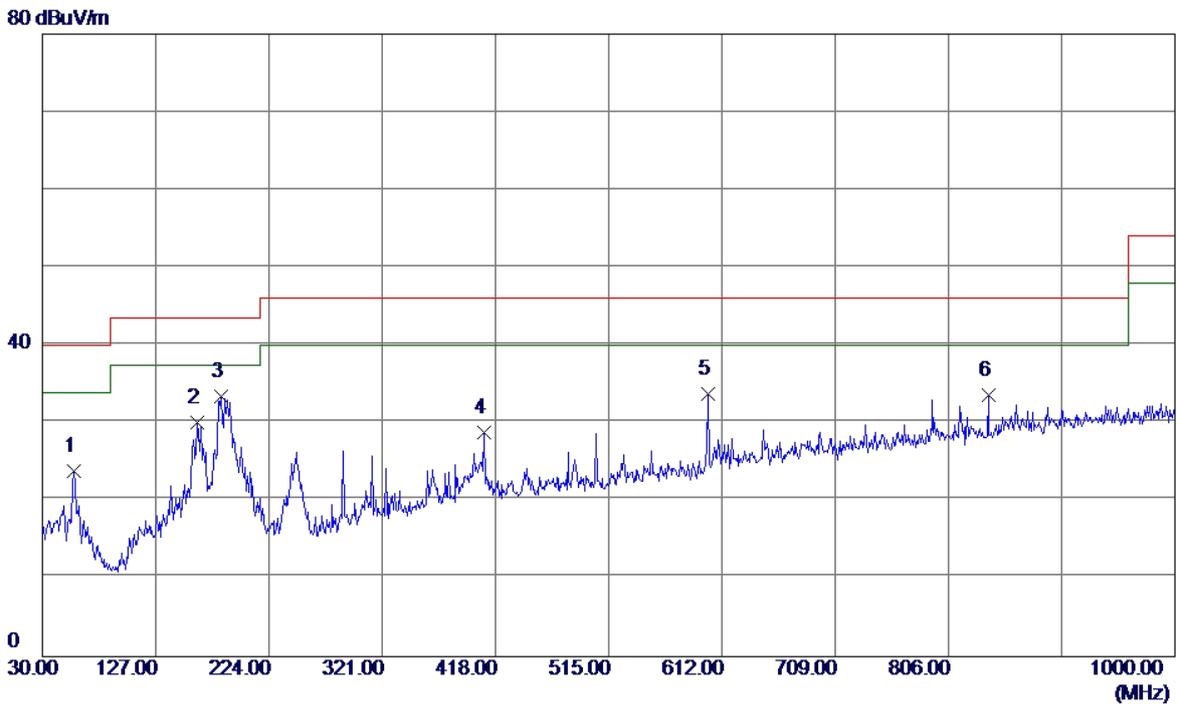


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	57.1600	36.33	-12.54	23.79	40.00	-16.21	QP
2	162.8900	41.47	-11.42	30.05	43.50	-13.45	QP
3 *	183.2600	44.93	-11.45	33.48	43.50	-10.02	QP
4	408.3000	36.74	-7.91	28.83	46.00	-17.17	QP
5	600.3600	37.35	-3.62	33.73	46.00	-12.27	QP
6	839.9500	31.80	1.73	33.53	46.00	-12.47	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

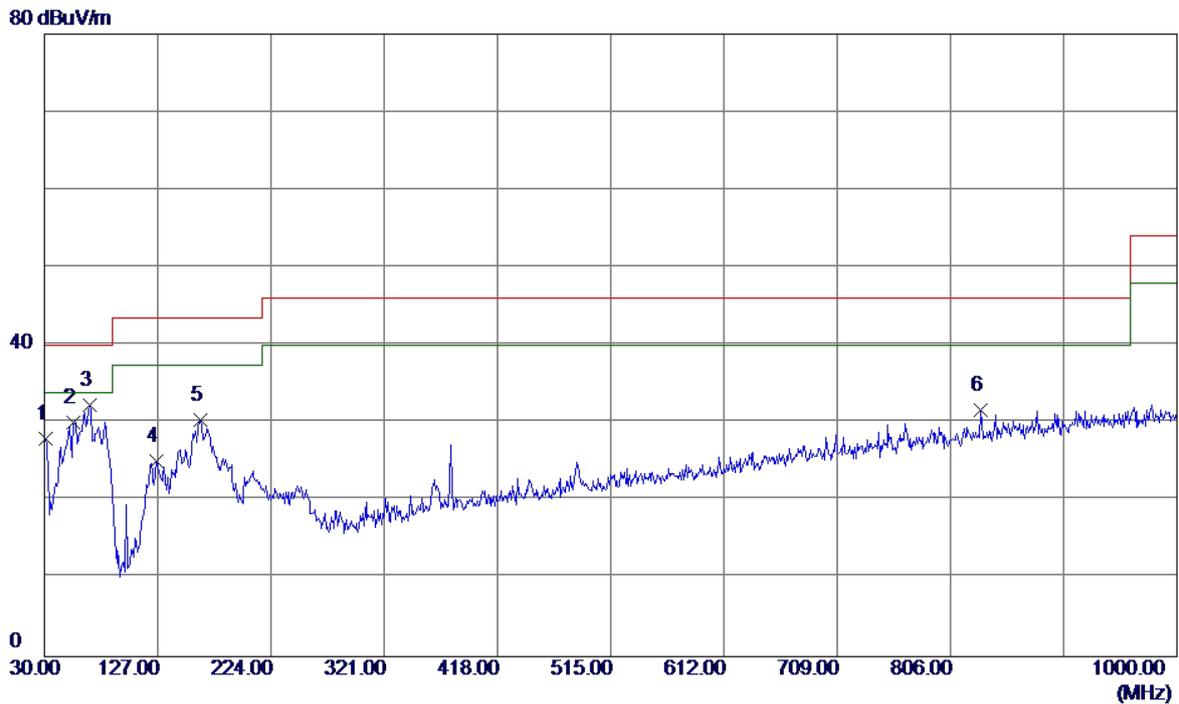


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	41.91	-13.88	28.03	40.00	-11.97	QP
2	55.2200	42.21	-12.13	30.08	40.00	-9.92	QP
3 *	68.8000	46.99	-14.65	32.34	40.00	-7.66	QP
4	126.0300	38.42	-13.28	25.14	43.50	-18.36	QP
5	163.8600	41.81	-11.38	30.43	43.50	-13.07	QP
6	832.1900	30.10	1.57	31.67	46.00	-14.33	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

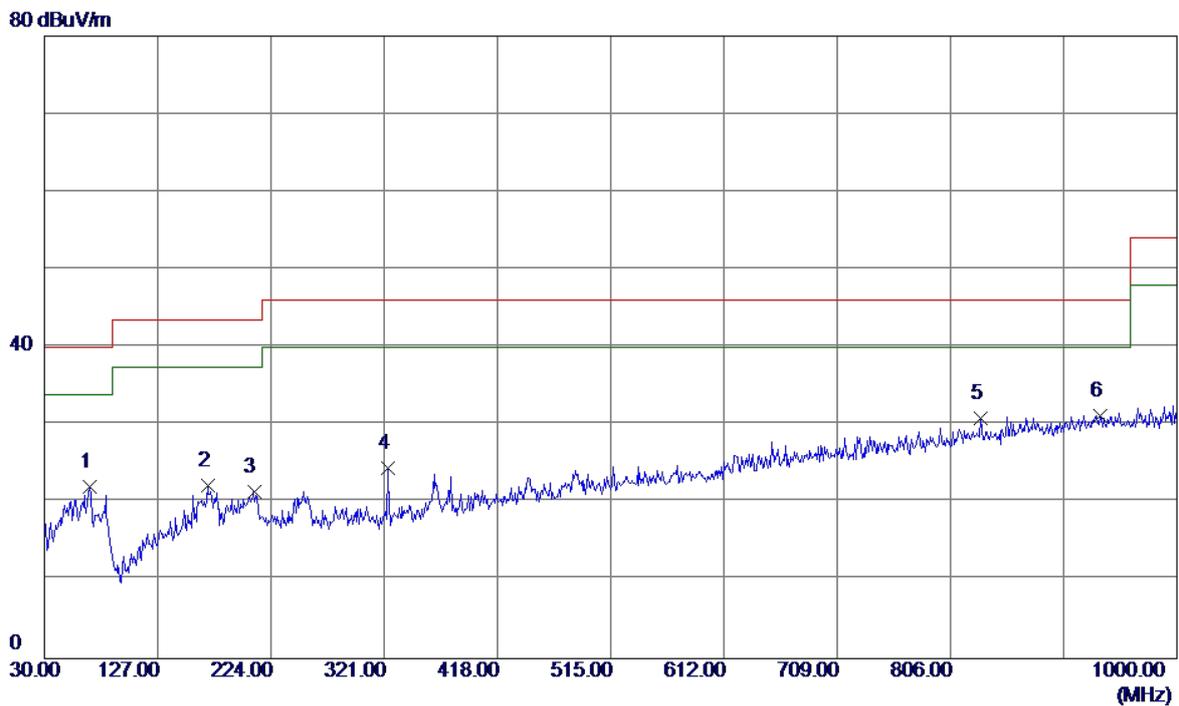


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	68.8000	36.69	-14.65	22.04	40.00	-17.96	QP
2	169.6799	33.34	-11.11	22.23	43.50	-21.27	QP
3	209.4500	34.50	-13.03	21.47	43.50	-22.03	QP
4	323.9100	34.51	-10.04	24.47	46.00	-21.53	QP
5	832.1900	29.30	1.57	30.87	46.00	-15.13	QP
6 *	934.0400	27.90	3.32	31.22	46.00	-14.78	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

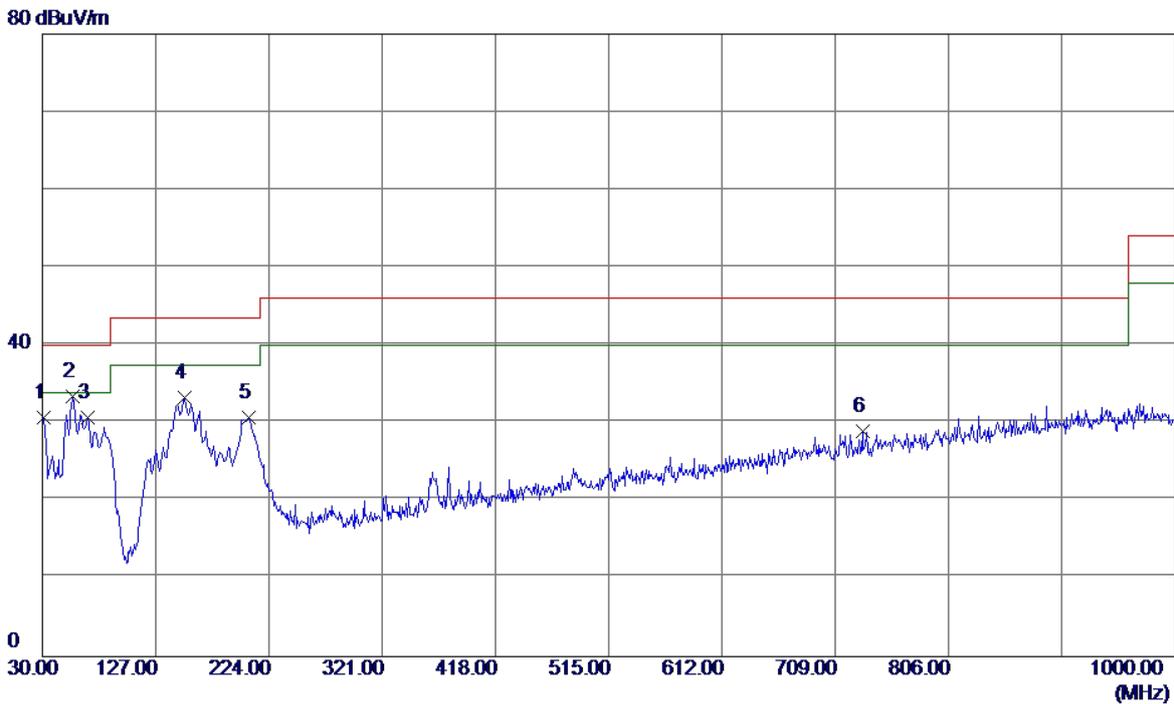


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	44.57	-13.88	30.69	40.00	-9.31	QP
2 *	56.1900	45.75	-12.26	33.49	40.00	-6.51	QP
3	68.8000	45.39	-14.65	30.74	40.00	-9.26	QP
4	152.2200	45.17	-11.91	33.26	43.50	-10.24	QP
5	206.5399	43.40	-12.75	30.65	43.50	-12.85	QP
6	732.2800	29.40	-0.37	29.03	46.00	-16.97	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

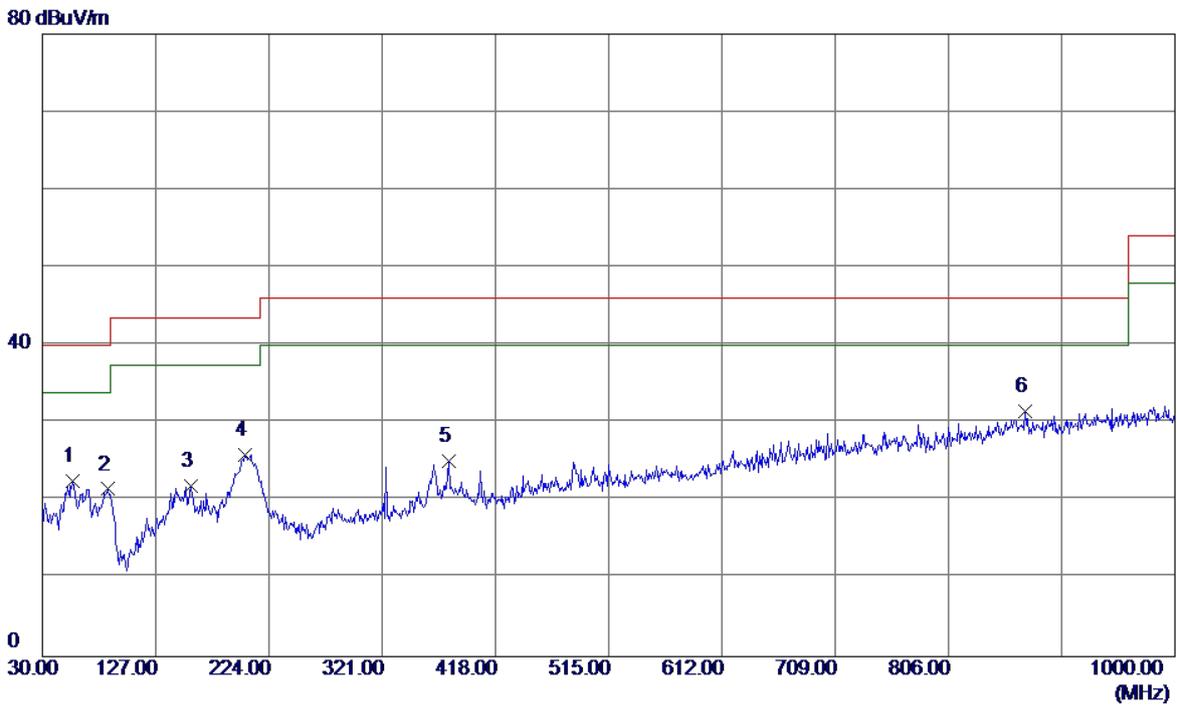


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.1900	34.85	-12.26	22.59	40.00	-17.41	QP
2	86.2600	38.58	-17.06	21.52	40.00	-18.48	QP
3	157.0700	33.57	-11.69	21.88	43.50	-21.62	QP
4	203.6300	38.38	-12.47	25.91	43.50	-17.59	QP
5	378.2300	33.84	-8.68	25.16	46.00	-20.84	QP
6 *	871.9600	29.15	2.37	31.52	46.00	-14.48	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

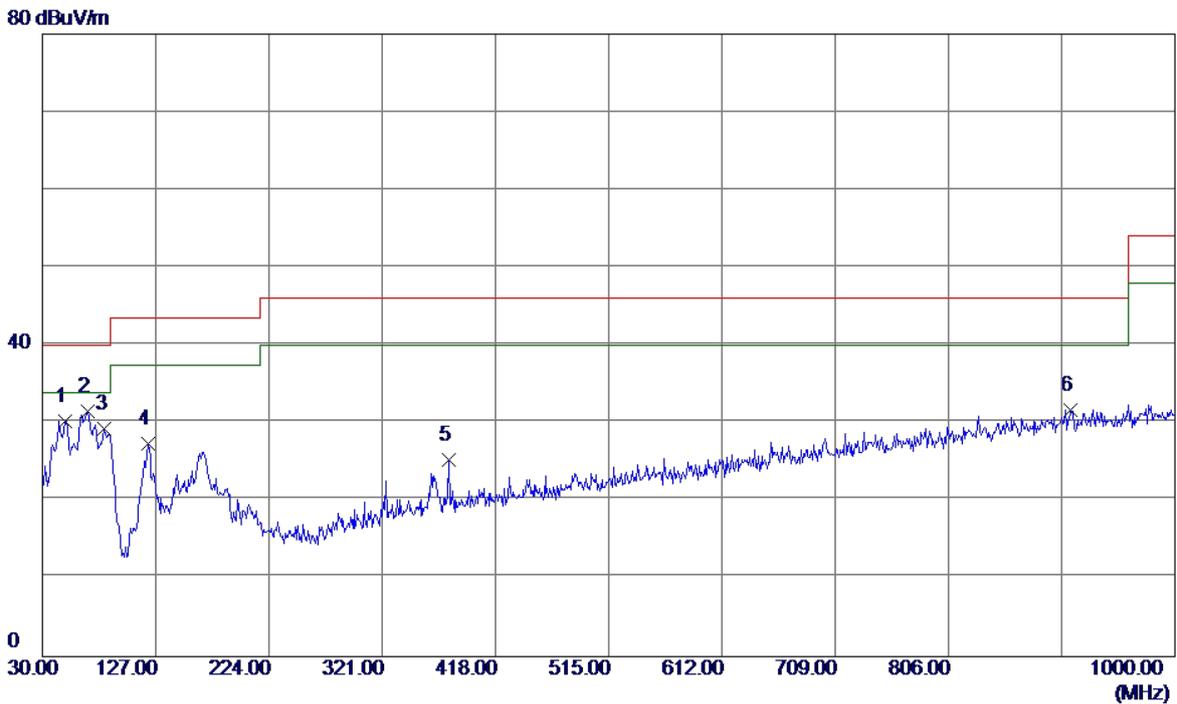


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	49.4000	42.23	-11.93	30.30	40.00	-9.70	QP
2 *	68.8000	46.12	-14.65	31.47	40.00	-8.53	QP
3	83.3500	46.26	-16.91	29.35	40.00	-10.65	QP
4	120.2100	41.00	-13.66	27.34	43.50	-16.16	QP
5	378.2300	33.98	-8.68	25.30	46.00	-20.70	QP
6	910.7600	28.69	3.03	31.72	46.00	-14.28	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

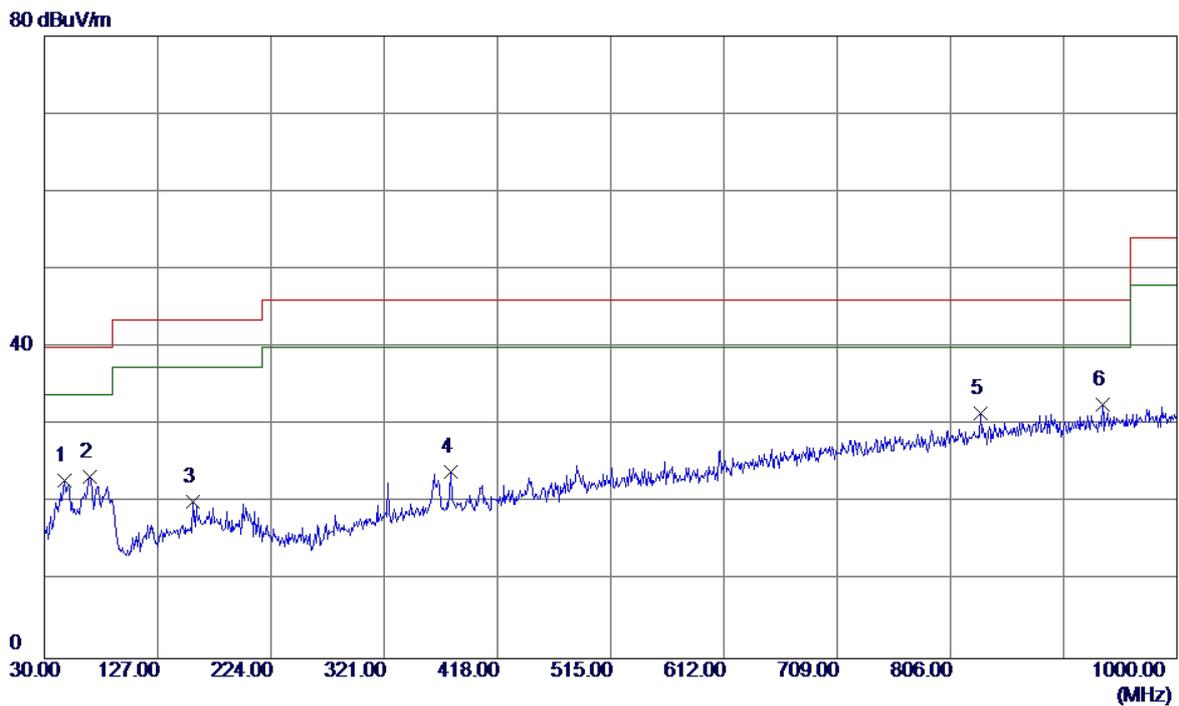


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	47.4600	34.78	-11.85	22.93	40.00	-17.07	QP
2	68.8000	38.06	-14.65	23.41	40.00	-16.59	QP
3	157.0700	31.86	-11.69	20.17	43.50	-23.33	QP
4	378.2300	32.66	-8.68	23.98	46.00	-22.02	QP
5	832.1900	29.95	1.57	31.52	46.00	-14.48	QP
6 *	935.9800	29.31	3.35	32.66	46.00	-13.34	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

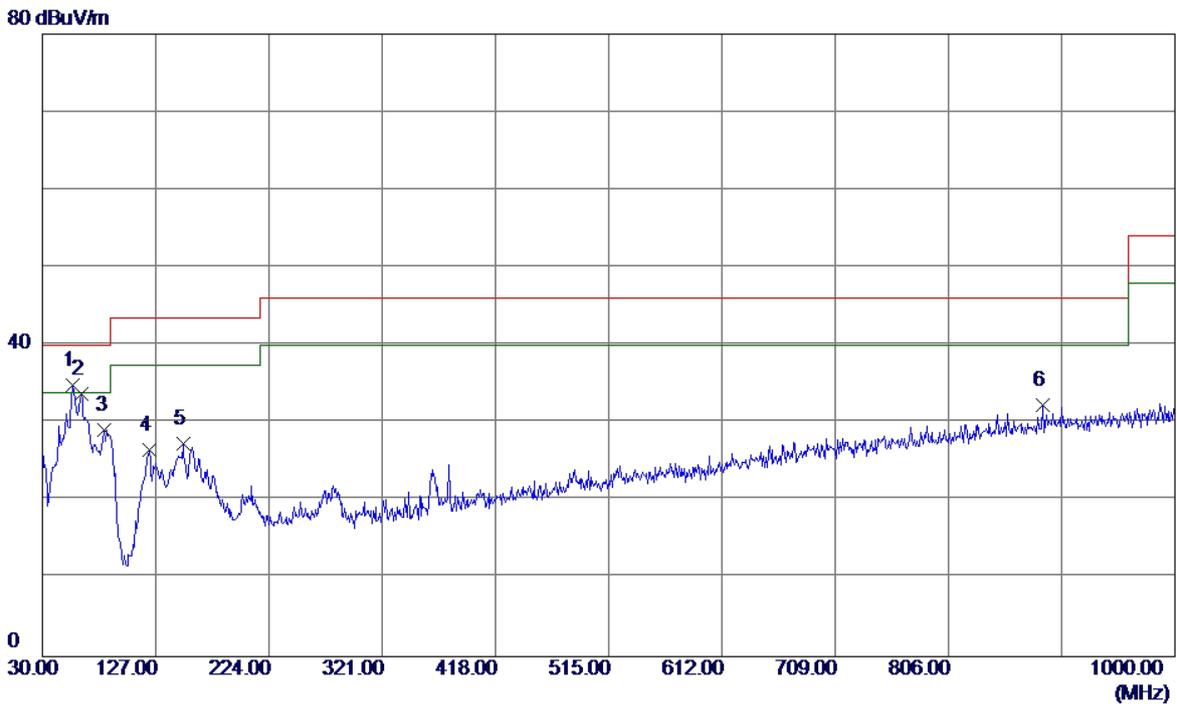


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	56.1900	47.09	-12.26	34.83	40.00	-5.17	QP
2	62.9800	47.31	-13.56	33.75	40.00	-6.25	QP
3	83.3500	46.05	-16.91	29.14	40.00	-10.86	QP
4	121.1800	40.19	-13.60	26.59	43.50	-16.91	QP
5	150.2800	39.32	-12.00	27.32	43.50	-16.18	QP
6	886.5100	29.75	2.64	32.39	46.00	-13.61	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

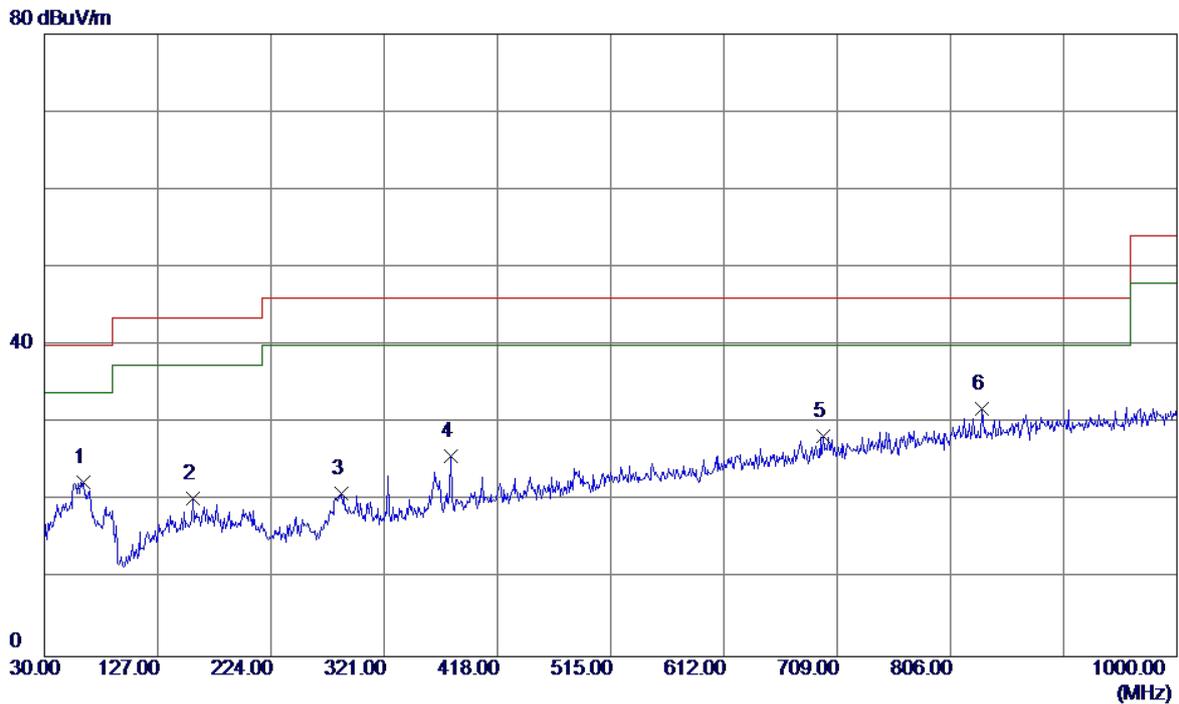

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	62.9800	36.01	-13.56	22.45	40.00	-17.55	QP
2	157.0700	31.97	-11.69	20.28	43.50	-23.22	QP
3	284.1400	32.88	-11.97	20.91	46.00	-25.09	QP
4	378.2300	34.47	-8.68	25.79	46.00	-20.21	QP
5	697.3600	29.38	-1.00	28.38	46.00	-17.62	QP
6 *	833.1599	30.28	1.59	31.87	46.00	-14.13	QP


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

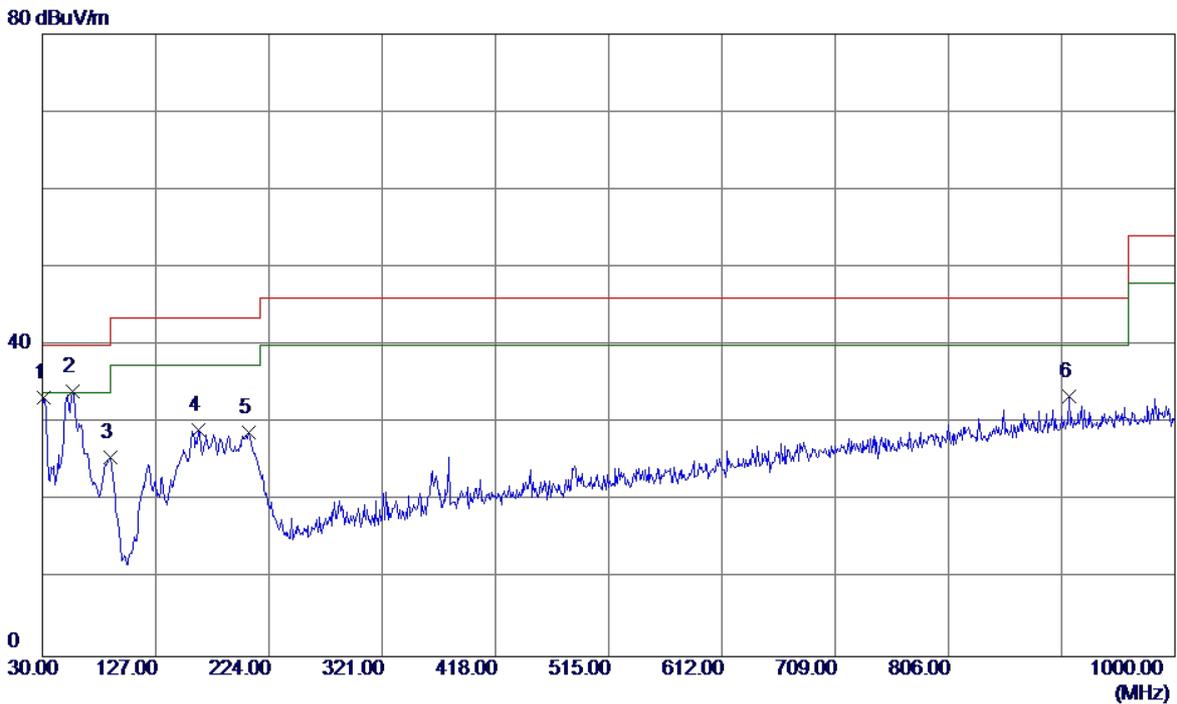

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	47.16	-13.88	33.28	40.00	-6.72	QP
2 *	56.1900	46.37	-12.26	34.11	40.00	-5.89	QP
3	88.2000	42.79	-17.17	25.62	43.50	-17.88	QP
4	163.8600	40.45	-11.38	29.07	43.50	-14.43	QP
5	206.5399	41.59	-12.75	28.84	43.50	-14.66	QP
6	909.7900	30.47	3.02	33.49	46.00	-12.51	QP


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

80 dBuV/m

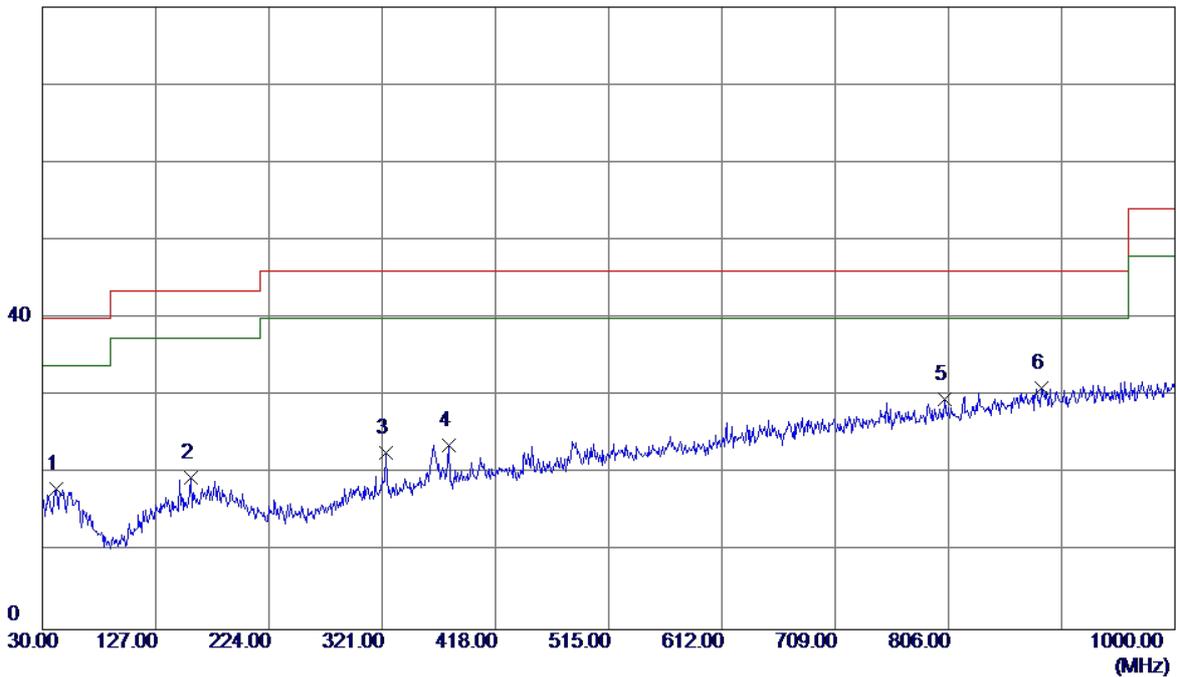


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	41.6400	30.59	-12.57	18.02	40.00	-21.98	QP
2	157.0700	31.17	-11.69	19.48	43.50	-24.02	QP
3	323.9100	32.73	-10.04	22.69	46.00	-23.31	QP
4	378.2300	32.43	-8.68	23.75	46.00	-22.25	QP
5	803.0900	28.60	0.94	29.54	46.00	-16.46	QP
6 *	885.5400	28.41	2.63	31.04	46.00	-14.96	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

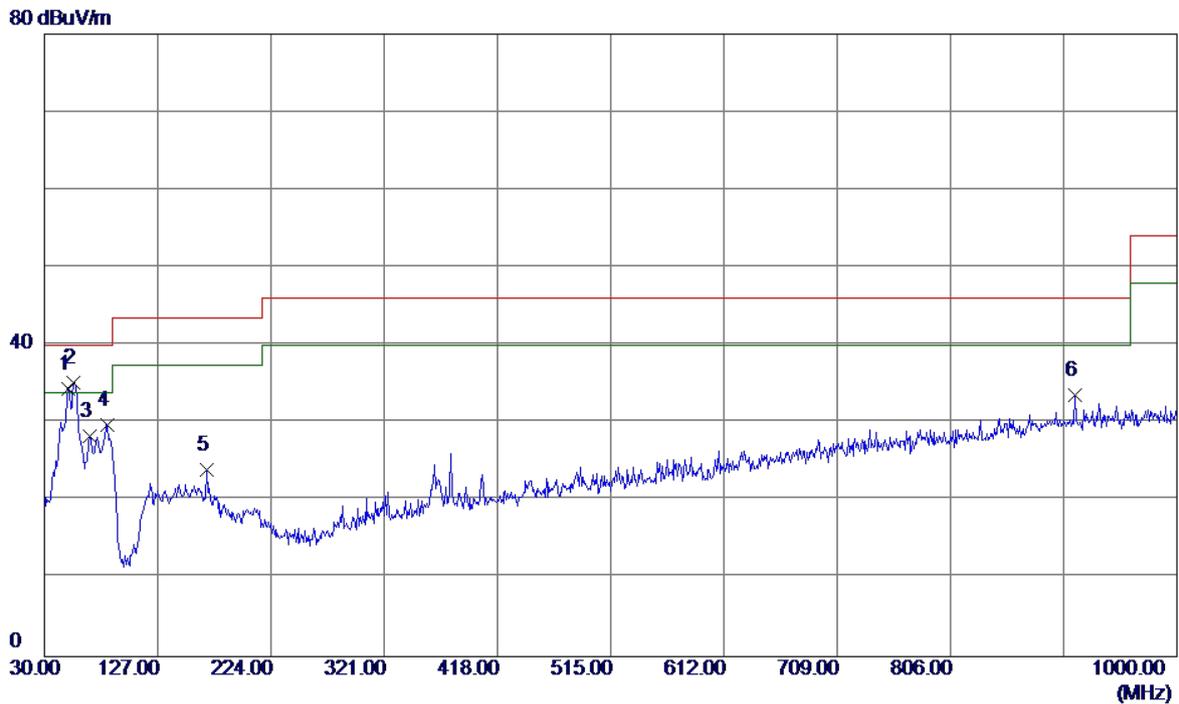


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.3700	46.36	-11.89	34.47	40.00	-5.53	QP
2 *	55.2200	47.33	-12.13	35.20	40.00	-4.80	QP
3	68.8000	42.90	-14.65	28.25	40.00	-11.75	QP
4	84.3200	46.71	-16.96	29.75	40.00	-10.25	QP
5	168.7100	35.20	-11.15	24.05	43.50	-19.45	QP
6	912.7000	30.47	3.06	33.53	46.00	-12.47	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

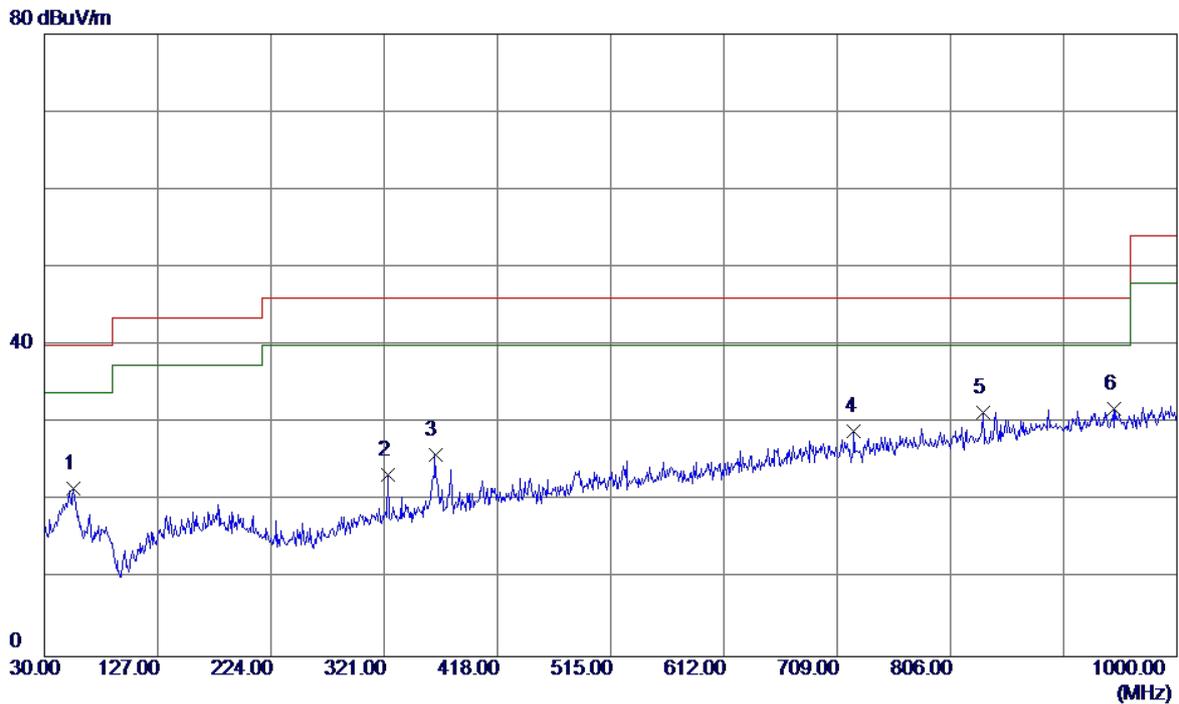


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	55.2200	33.73	-12.13	21.60	40.00	-18.40	QP
2	323.9100	33.34	-10.04	23.30	46.00	-22.70	QP
3	364.6500	34.97	-9.04	25.93	46.00	-20.07	QP
4	723.5500	29.45	-0.52	28.93	46.00	-17.07	QP
5	834.1300	29.75	1.61	31.36	46.00	-14.64	QP
6 *	945.6800	28.40	3.47	31.87	46.00	-14.13	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

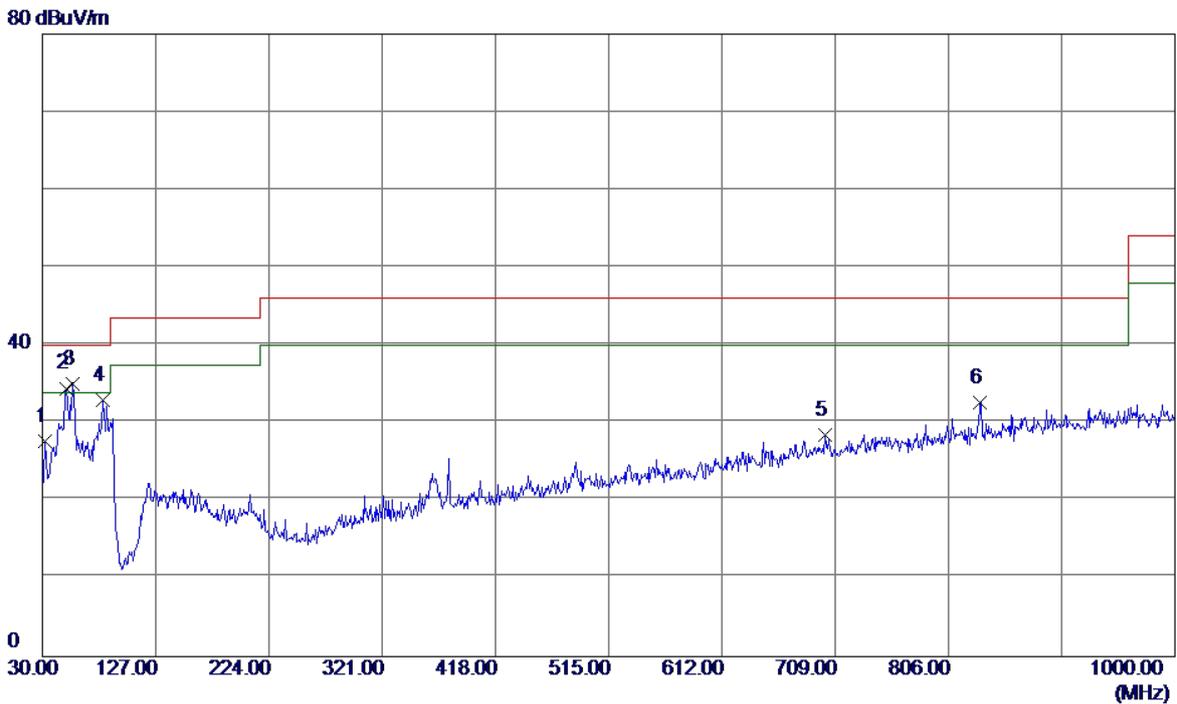


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	31.9400	41.37	-13.72	27.65	40.00	-12.35	QP
2	50.3700	46.37	-11.89	34.48	40.00	-5.52	QP
3 *	56.1900	47.24	-12.26	34.98	40.00	-5.02	QP
4	81.4100	49.73	-16.80	32.93	40.00	-7.07	QP
5	700.2700	29.35	-0.93	28.42	46.00	-17.58	QP
6	833.1599	31.10	1.59	32.69	46.00	-13.31	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

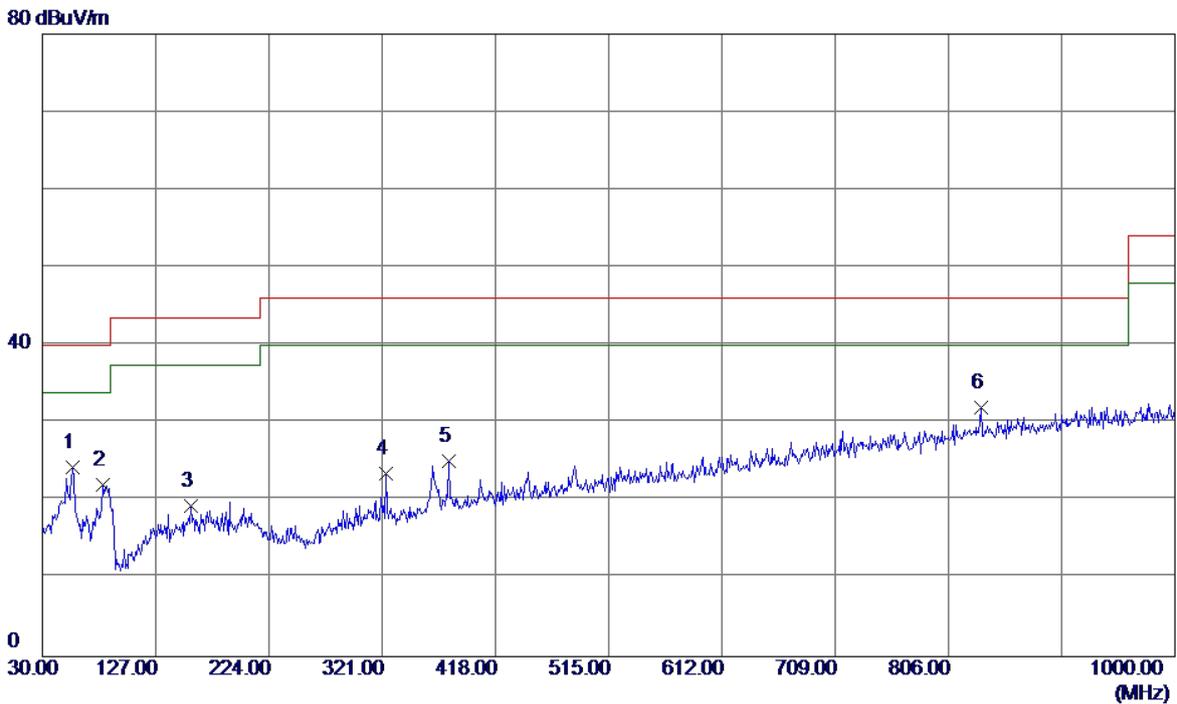


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.1900	36.64	-12.26	24.38	40.00	-15.62	QP
2	81.4100	38.91	-16.80	22.11	40.00	-17.89	QP
3	157.0700	31.07	-11.69	19.38	43.50	-24.12	QP
4	323.9100	33.49	-10.04	23.45	46.00	-22.55	QP
5	378.2300	33.73	-8.68	25.05	46.00	-20.95	QP
6 *	834.1300	30.44	1.61	32.05	46.00	-13.95	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

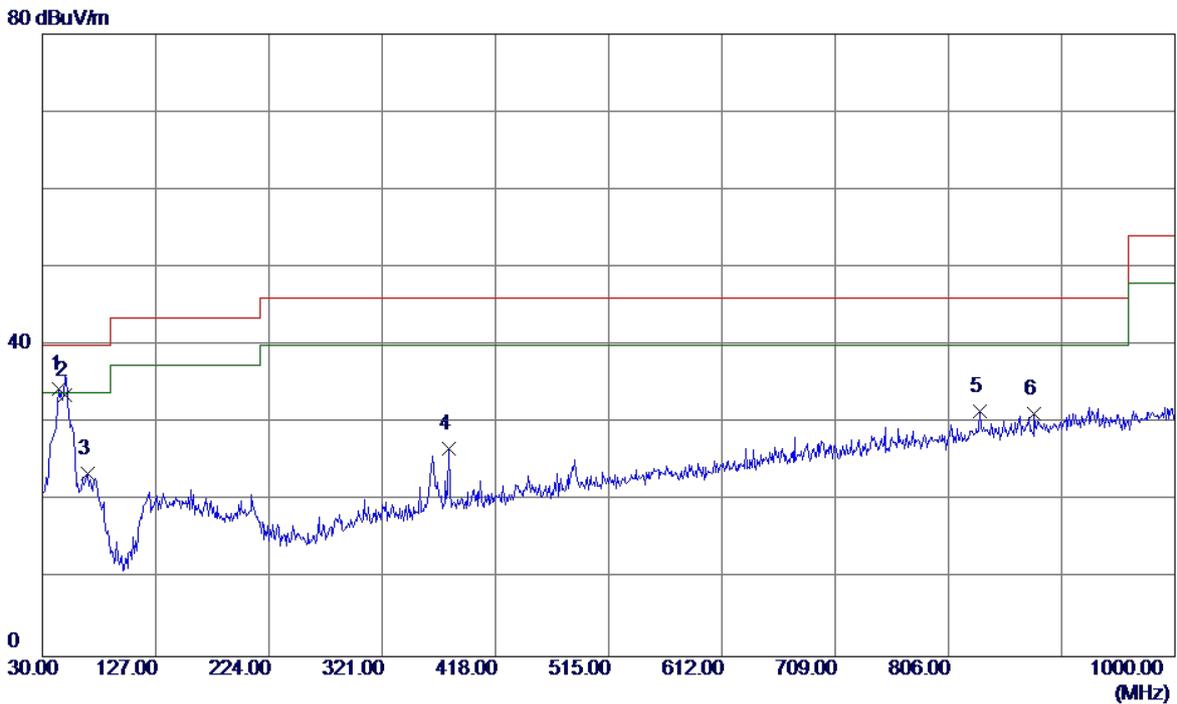


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	44.5500	46.31	-11.95	34.36	40.00	-5.64	QP
2	49.4000	45.50	-11.93	33.57	40.00	-6.43	QP
3	68.8000	38.19	-14.65	23.54	40.00	-16.46	QP
4	378.2300	35.35	-8.68	26.67	46.00	-19.33	QP
5	833.1599	29.93	1.59	31.52	46.00	-14.48	QP
6	879.7200	28.63	2.51	31.14	46.00	-14.86	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

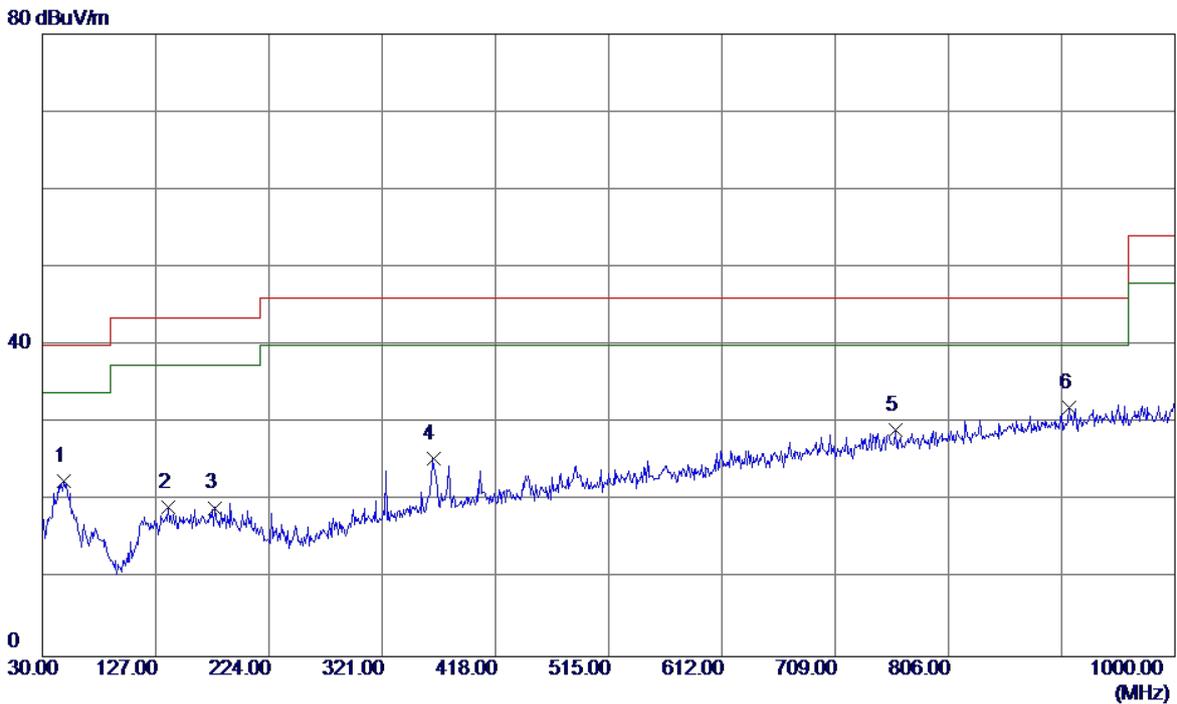

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	48.4300	34.49	-11.89	22.60	40.00	-17.40	QP
2	137.6700	31.84	-12.60	19.24	43.50	-24.26	QP
3	177.4400	30.47	-11.35	19.12	43.50	-24.38	QP
4	364.6500	34.49	-9.04	25.45	46.00	-20.55	QP
5	760.4099	29.00	0.13	29.13	46.00	-16.87	QP
6 *	909.7900	28.97	3.02	31.99	46.00	-14.01	QP


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

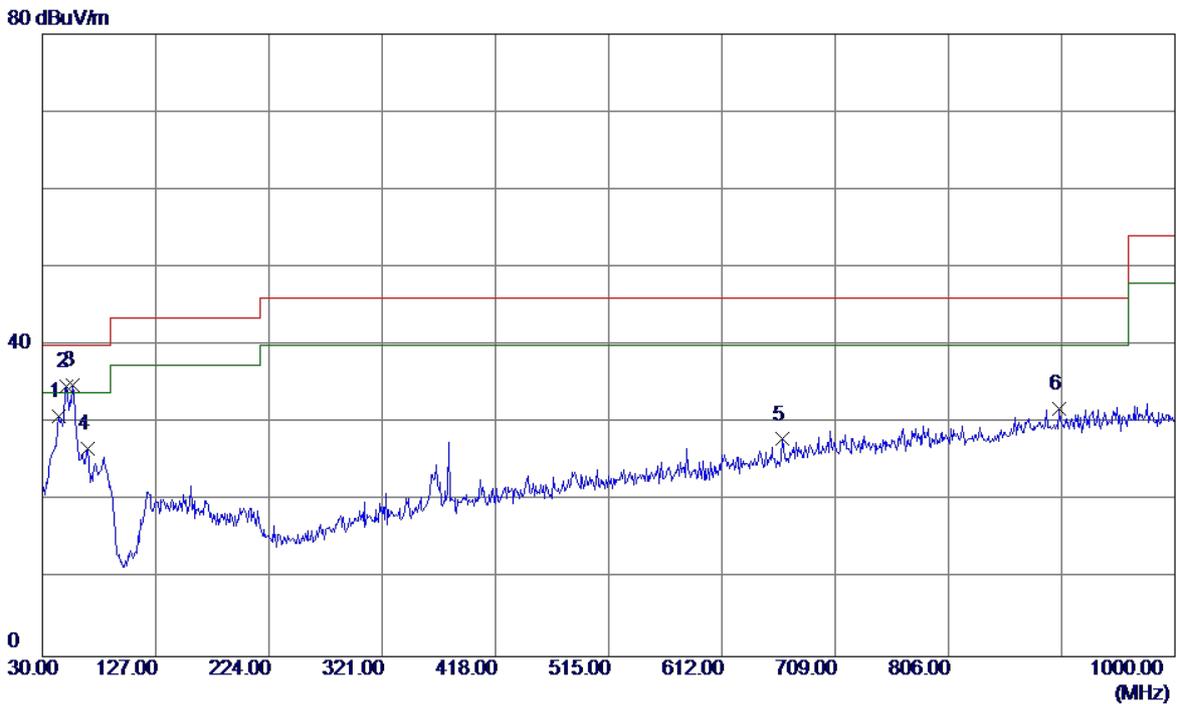

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	43.5800	43.04	-12.12	30.92	40.00	-9.08	QP
2	50.3700	46.63	-11.89	34.74	40.00	-5.26	QP
3 *	56.1900	47.10	-12.26	34.84	40.00	-5.16	QP
4	68.8000	41.31	-14.65	26.66	40.00	-13.34	QP
5	663.4099	29.78	-1.86	27.92	46.00	-18.08	QP
6	901.0600	28.96	2.91	31.87	46.00	-14.13	QP


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

80 dBuV/m

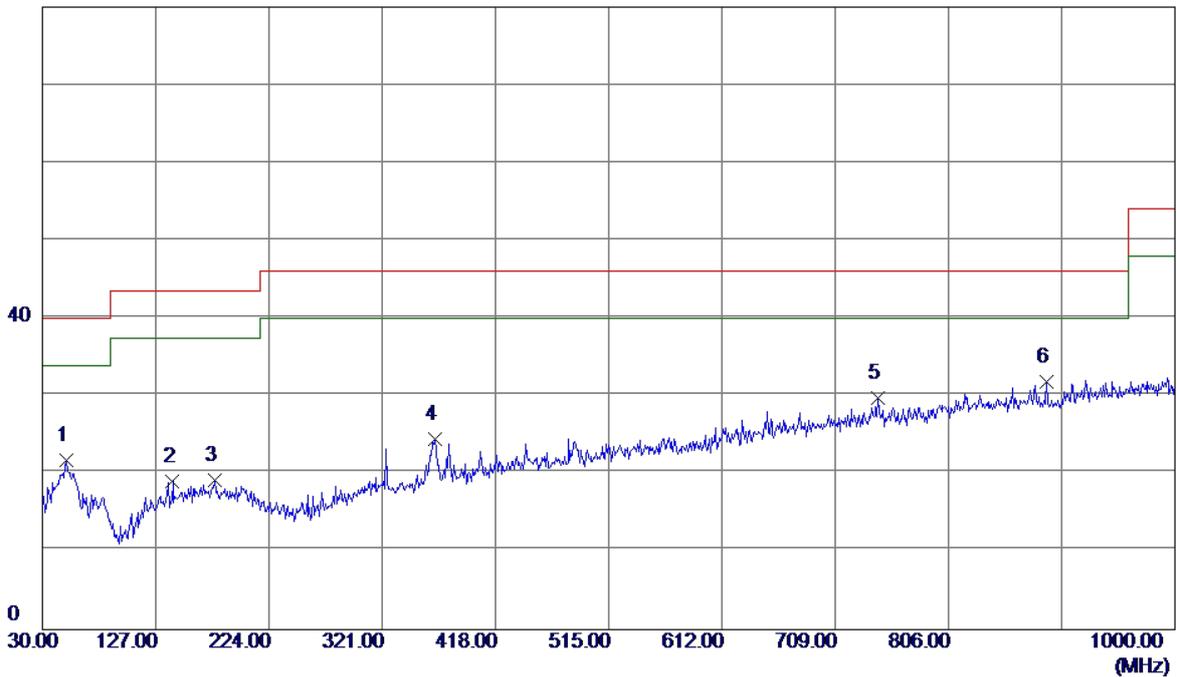


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.3700	33.59	-11.89	21.70	40.00	-18.30	QP
2	141.5500	31.40	-12.40	19.00	43.50	-24.50	QP
3	177.4400	30.59	-11.35	19.24	43.50	-24.26	QP
4	366.5900	33.42	-8.99	24.43	46.00	-21.57	QP
5	745.8600	29.89	-0.14	29.75	46.00	-16.25	QP
6 *	890.3900	29.05	2.72	31.77	46.00	-14.23	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

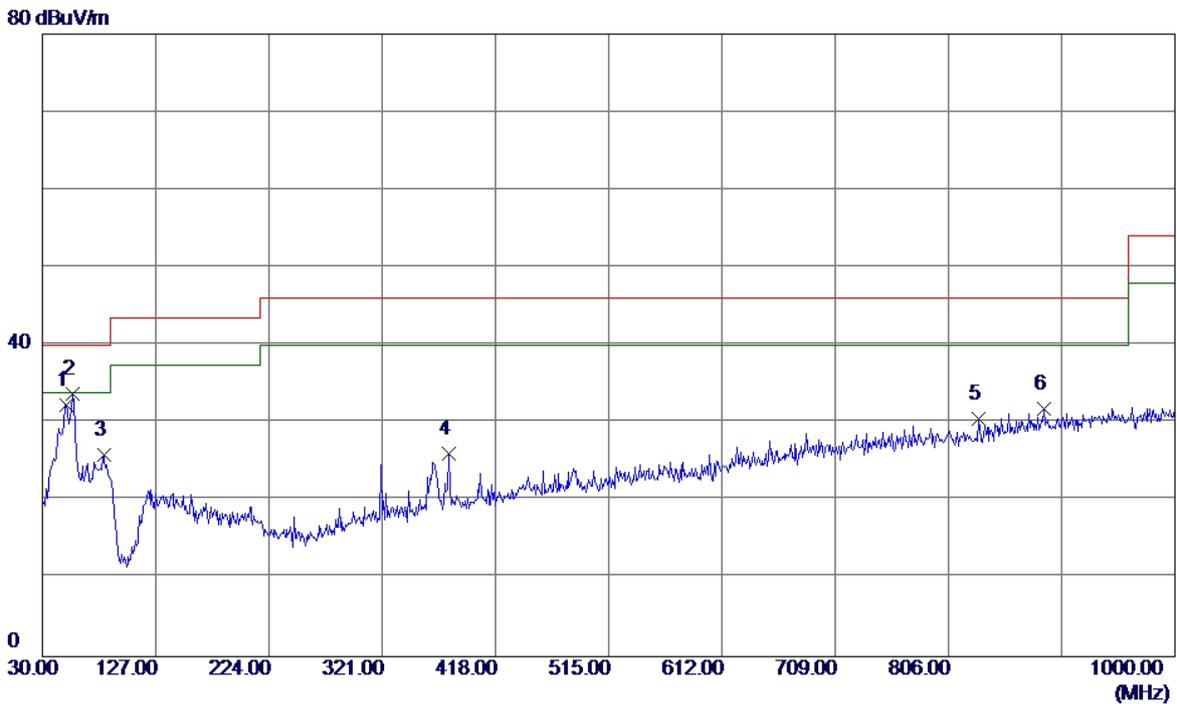


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	50.3700	44.24	-11.89	32.35	40.00	-7.65	QP
2 *	56.1900	46.06	-12.26	33.80	40.00	-6.20	QP
3	82.3800	42.78	-16.86	25.92	40.00	-14.08	QP
4	378.2300	34.77	-8.68	26.09	46.00	-19.91	QP
5	832.1900	29.01	1.57	30.58	46.00	-15.42	QP
6	887.4800	29.14	2.66	31.80	46.00	-14.20	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

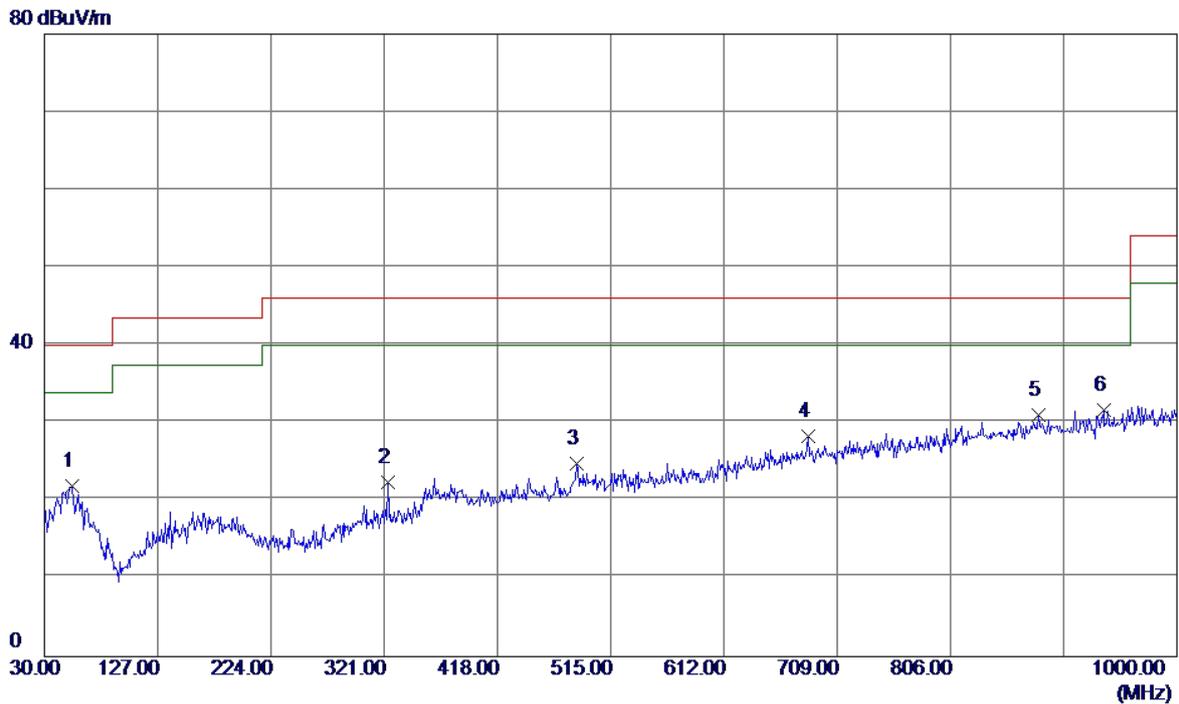

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	53.2800	33.73	-11.88	21.85	40.00	-18.15	QP
2	323.9100	32.44	-10.04	22.40	46.00	-23.60	QP
3	485.9000	30.89	-6.06	24.83	46.00	-21.17	QP
4	683.7800	29.60	-1.34	28.26	46.00	-17.74	QP
5	881.6600	28.54	2.55	31.09	46.00	-14.91	QP
6 *	936.9500	28.33	3.36	31.69	46.00	-14.31	QP


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

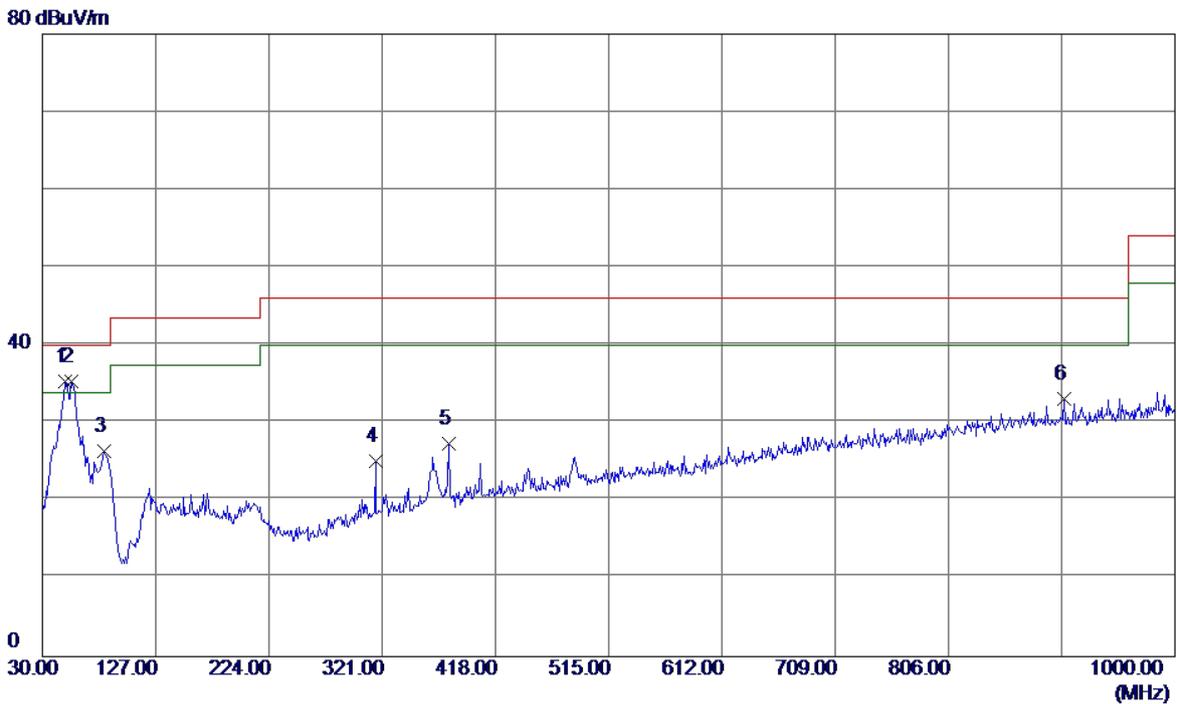

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	49.4000	47.24	-11.93	35.31	40.00	-4.69	QP
2 *	55.2200	47.50	-12.13	35.37	40.00	-4.63	QP
3	82.3800	43.32	-16.86	26.46	40.00	-13.54	QP
4	315.1800	35.41	-10.25	25.16	46.00	-20.84	QP
5	378.2300	36.08	-8.68	27.40	46.00	-18.60	QP
6	904.9400	30.10	2.96	33.06	46.00	-12.94	QP

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

80 dBuV/m

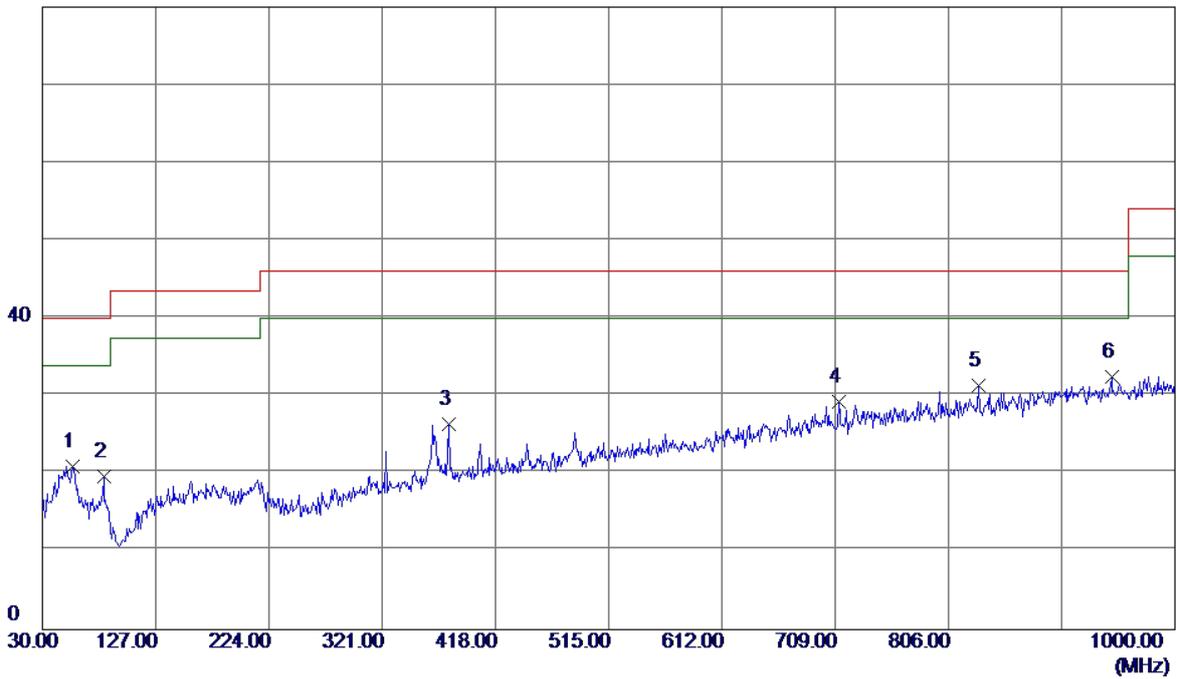


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	56.1900	33.27	-12.26	21.01	40.00	-18.99	QP
2	82.3800	36.57	-16.86	19.71	40.00	-20.29	QP
3	378.2300	35.05	-8.68	26.37	46.00	-19.63	QP
4	711.9099	29.98	-0.73	29.25	46.00	-16.75	QP
5	832.1900	29.79	1.57	31.36	46.00	-14.64	QP
6 *	945.6800	28.94	3.47	32.41	46.00	-13.59	QP

4.2.7 TEST RESULTS-ABOVE 1GHZ

Remark :


- (1) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:Coslight		
Test Engineer	Sam Wang		

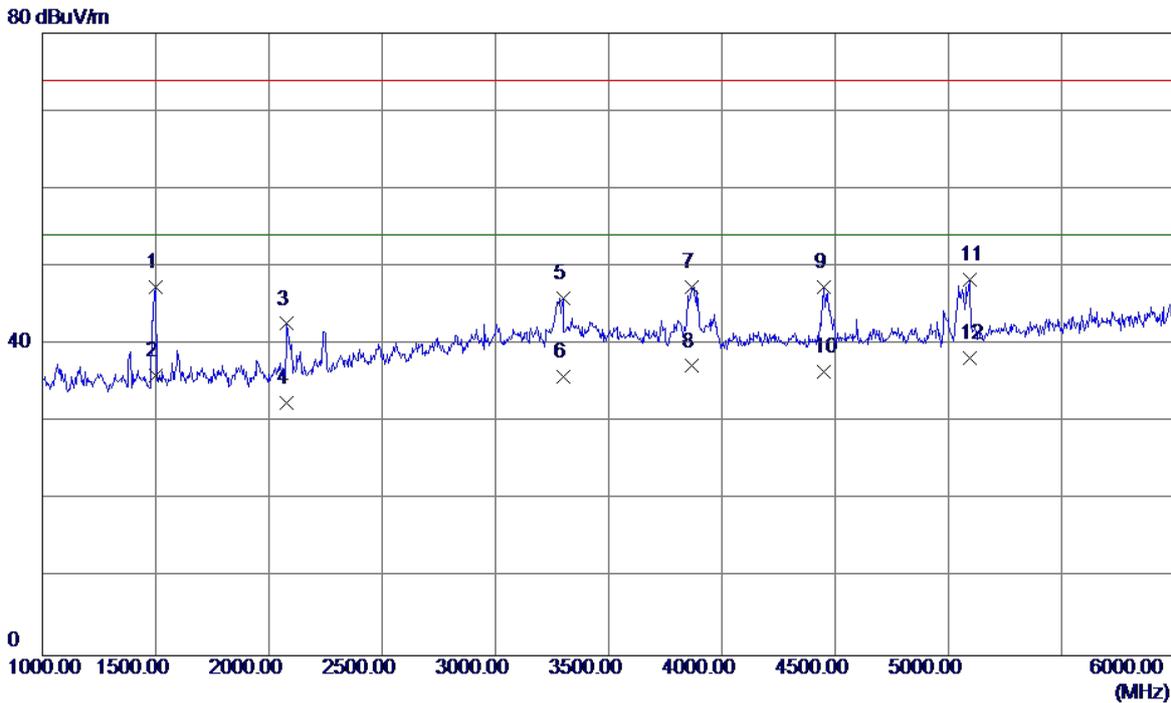


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1500.0000	50.71	-3.40	47.31	74.00	-26.69	Peak
2	1500.0000	39.42	-3.40	36.02	54.00	-17.98	AVG
3	2080.0000	43.73	-1.09	42.64	74.00	-31.36	Peak
4	2080.0000	33.52	-1.09	32.43	54.00	-21.57	AVG
5	3297.5000	41.07	4.91	45.98	74.00	-28.02	Peak
6	3297.5000	30.86	4.91	35.77	54.00	-18.23	AVG
7	3865.0000	41.79	5.56	47.35	74.00	-26.65	Peak
8	3865.0000	31.64	5.56	37.20	54.00	-16.80	AVG
9	4447.5000	40.93	6.39	47.32	74.00	-26.68	Peak
10	4447.5000	30.15	6.39	36.54	54.00	-17.46	AVG
11	5092.5000	40.63	7.72	48.35	74.00	-25.65	Peak
12 *	5092.5000	30.54	7.72	38.26	54.00	-15.74	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:Coslight		
Test Engineer	Sam Wang		

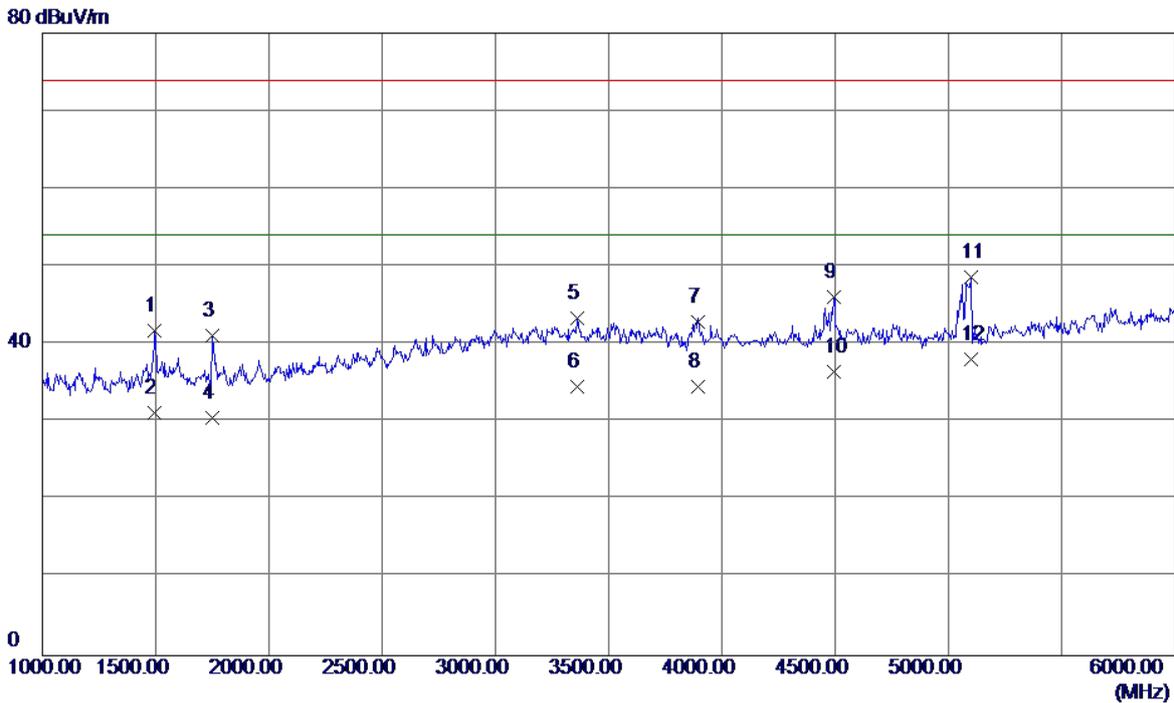


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	45.16	-3.42	41.74	74.00	-32.26	Peak
2	1495.0000	34.62	-3.42	31.20	54.00	-22.80	AVG
3	1747.5000	43.57	-2.47	41.10	74.00	-32.90	Peak
4	1747.5000	32.99	-2.47	30.52	54.00	-23.48	AVG
5	3362.5000	38.22	5.08	43.30	74.00	-30.70	Peak
6	3362.5000	29.41	5.08	34.49	54.00	-19.51	AVG
7	3895.0000	37.31	5.57	42.88	74.00	-31.12	Peak
8	3895.0000	29.01	5.57	34.58	54.00	-19.42	AVG
9	4492.5000	39.63	6.47	46.10	74.00	-27.90	Peak
10	4492.5000	30.05	6.47	36.52	54.00	-17.48	AVG
11	5100.0000	40.92	7.75	48.67	74.00	-25.33	Peak
12 *	5100.0000	30.27	7.75	38.02	54.00	-15.98	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:SCUD		
Test Engineer	Sam Wang		

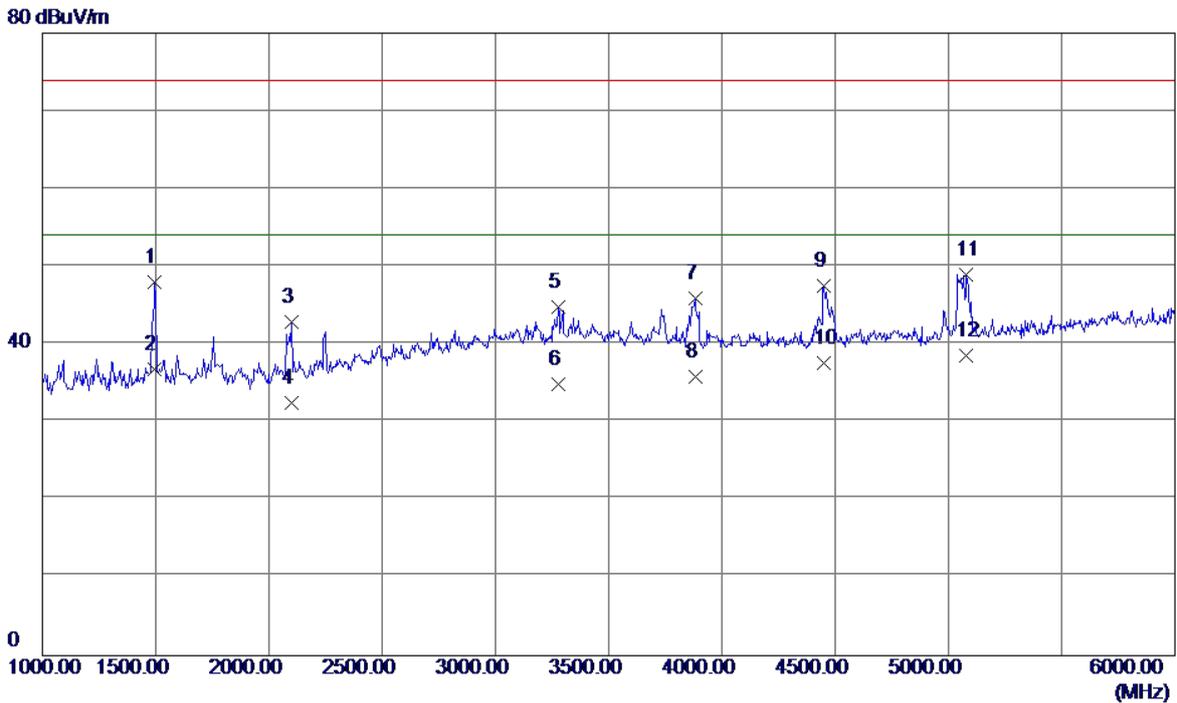


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	51.37	-3.42	47.95	74.00	-26.05	Peak
2	1495.0000	40.29	-3.42	36.87	54.00	-17.13	AVG
3	2100.0000	43.82	-0.98	42.84	74.00	-31.16	Peak
4	2100.0000	33.51	-0.98	32.53	54.00	-21.47	AVG
5	3277.5000	39.87	4.86	44.73	74.00	-29.27	Peak
6	3277.5000	30.05	4.86	34.91	54.00	-19.09	AVG
7	3882.5000	40.42	5.57	45.99	74.00	-28.01	Peak
8	3882.5000	30.22	5.57	35.79	54.00	-18.21	AVG
9	4450.0000	41.16	6.40	47.56	74.00	-26.44	Peak
10	4450.0000	31.23	6.40	37.63	54.00	-16.37	AVG
11	5080.0000	41.33	7.68	49.01	74.00	-24.99	Peak
12 *	5080.0000	30.87	7.68	38.55	54.00	-15.45	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB copy(EUT with PC)+idle		
Note	Battery:SCUD		
Test Engineer	Sam Wang		

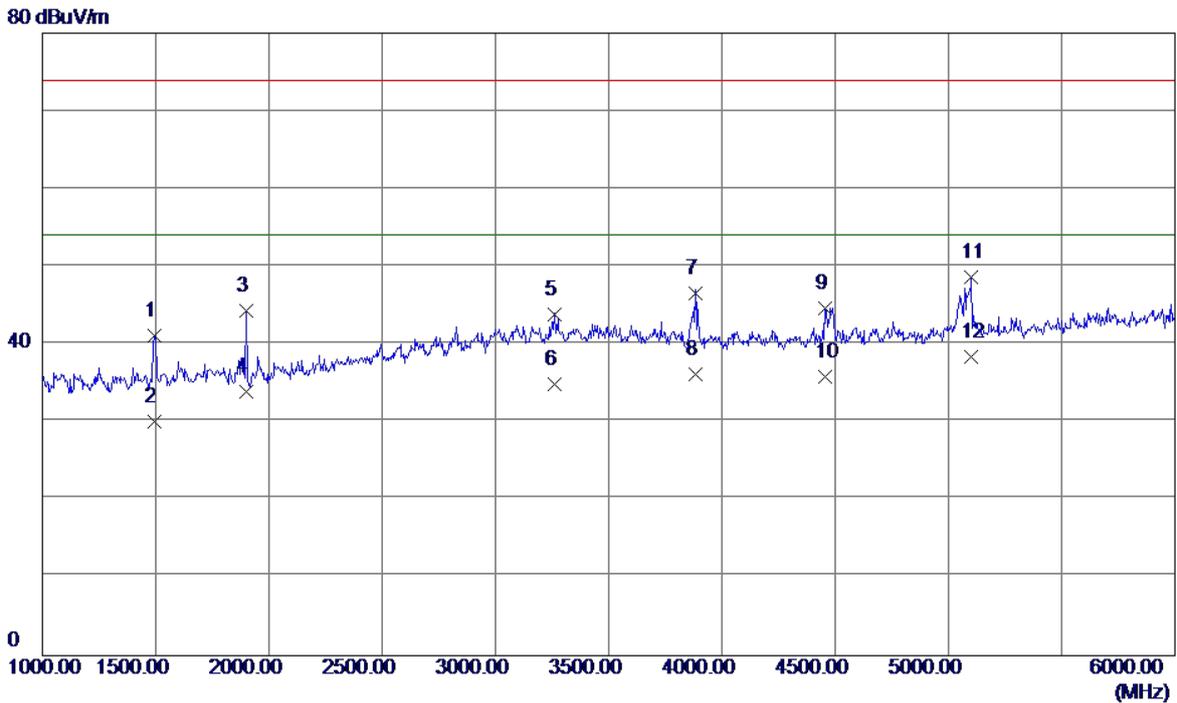


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	44.61	-3.42	41.19	74.00	-32.81	Peak
2	1495.0000	33.57	-3.42	30.15	54.00	-23.85	AVG
3	1900.0000	46.22	-1.90	44.32	74.00	-29.68	Peak
4	1900.0000	35.87	-1.90	33.97	54.00	-20.03	AVG
5	3262.5000	39.10	4.82	43.92	74.00	-30.08	Peak
6	3262.5000	30.04	4.82	34.86	54.00	-19.14	AVG
7	3882.5000	40.99	5.57	46.56	74.00	-27.44	Peak
8	3882.5000	30.57	5.57	36.14	54.00	-17.86	AVG
9	4457.5000	38.18	6.41	44.59	74.00	-29.41	Peak
10	4457.5000	29.46	6.41	35.87	54.00	-18.13	AVG
11	5100.0000	40.96	7.75	48.71	74.00	-25.29	Peak
12 *	5100.0000	30.61	7.75	38.36	54.00	-15.64	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

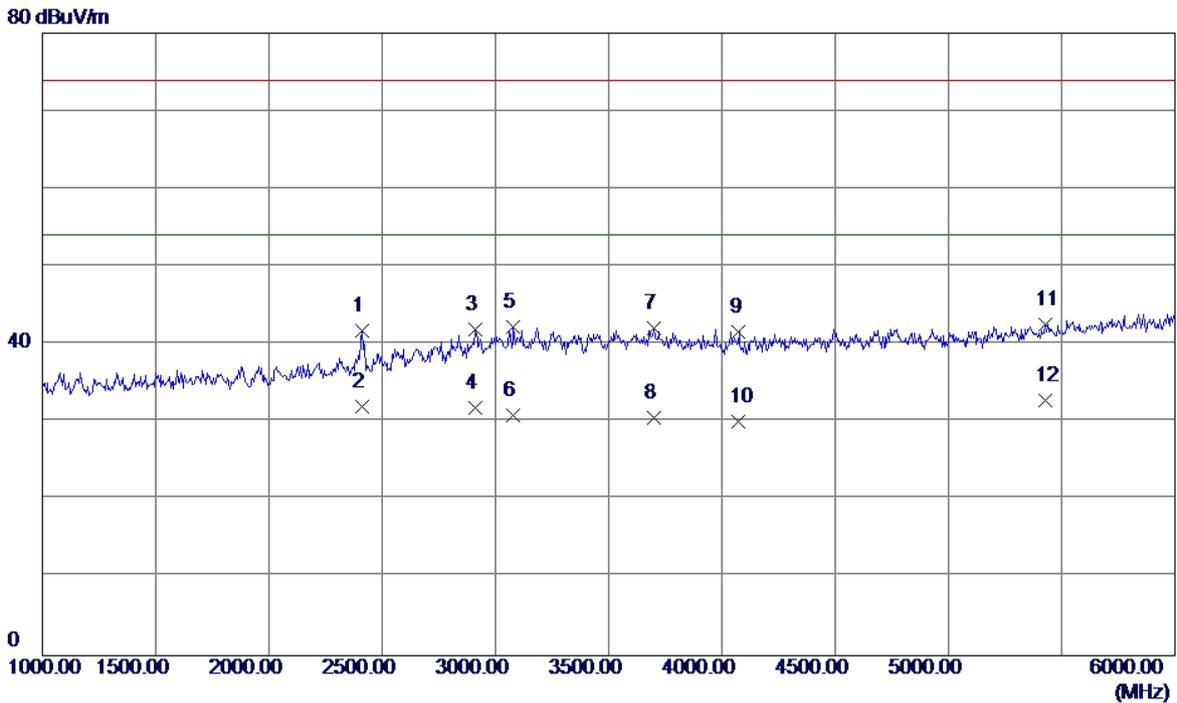


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2410.0000	41.02	0.67	41.69	74.00	-32.31	Peak
2	2410.0000	31.31	0.67	31.98	54.00	-22.02	AVG
3	2910.0000	38.35	3.60	41.95	74.00	-32.05	Peak
4	2910.0000	28.30	3.60	31.90	54.00	-22.10	AVG
5	3080.0000	37.94	4.35	42.29	74.00	-31.71	Peak
6	3080.0000	26.50	4.35	30.85	54.00	-23.15	AVG
7	3700.0000	36.57	5.51	42.08	74.00	-31.92	Peak
8	3700.0000	25.09	5.51	30.60	54.00	-23.40	AVG
9	4075.0000	35.93	5.74	41.67	74.00	-32.33	Peak
10	4075.0000	24.29	5.74	30.03	54.00	-23.97	AVG
11	5430.0000	33.59	8.94	42.53	74.00	-31.47	Peak
12 *	5430.0000	23.88	8.94	32.82	54.00	-21.18	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

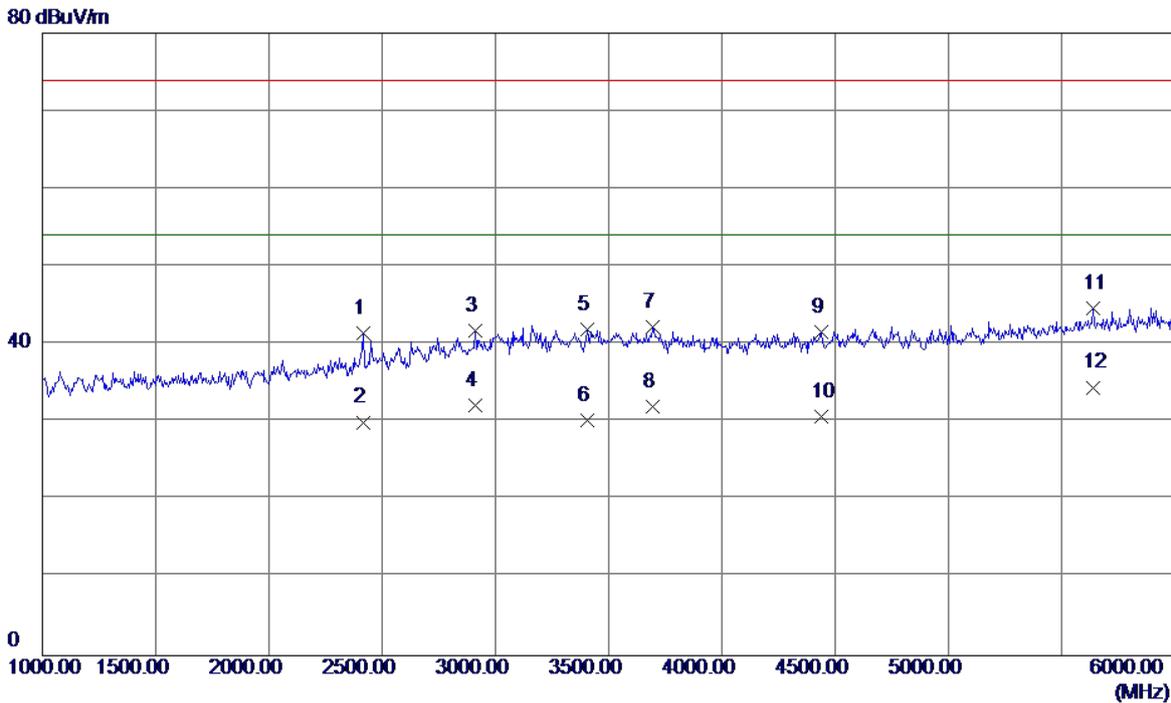


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2415.0000	40.71	0.70	41.41	74.00	-32.59	Peak
2	2415.0000	29.30	0.70	30.00	54.00	-24.00	AVG
3	2910.0000	38.13	3.60	41.73	74.00	-32.27	Peak
4	2910.0000	28.50	3.60	32.10	54.00	-21.90	AVG
5	3405.0000	36.72	5.19	41.91	74.00	-32.09	Peak
6	3405.0000	25.10	5.19	30.29	54.00	-23.71	AVG
7	3695.0000	36.81	5.50	42.31	74.00	-31.69	Peak
8	3695.0000	26.50	5.50	32.00	54.00	-22.00	AVG
9	4440.0000	35.20	6.38	41.58	74.00	-32.42	Peak
10	4440.0000	24.30	6.38	30.68	54.00	-23.32	AVG
11	5640.0000	34.96	9.73	44.69	74.00	-29.31	Peak
12 *	5640.0000	24.75	9.73	34.48	54.00	-19.52	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

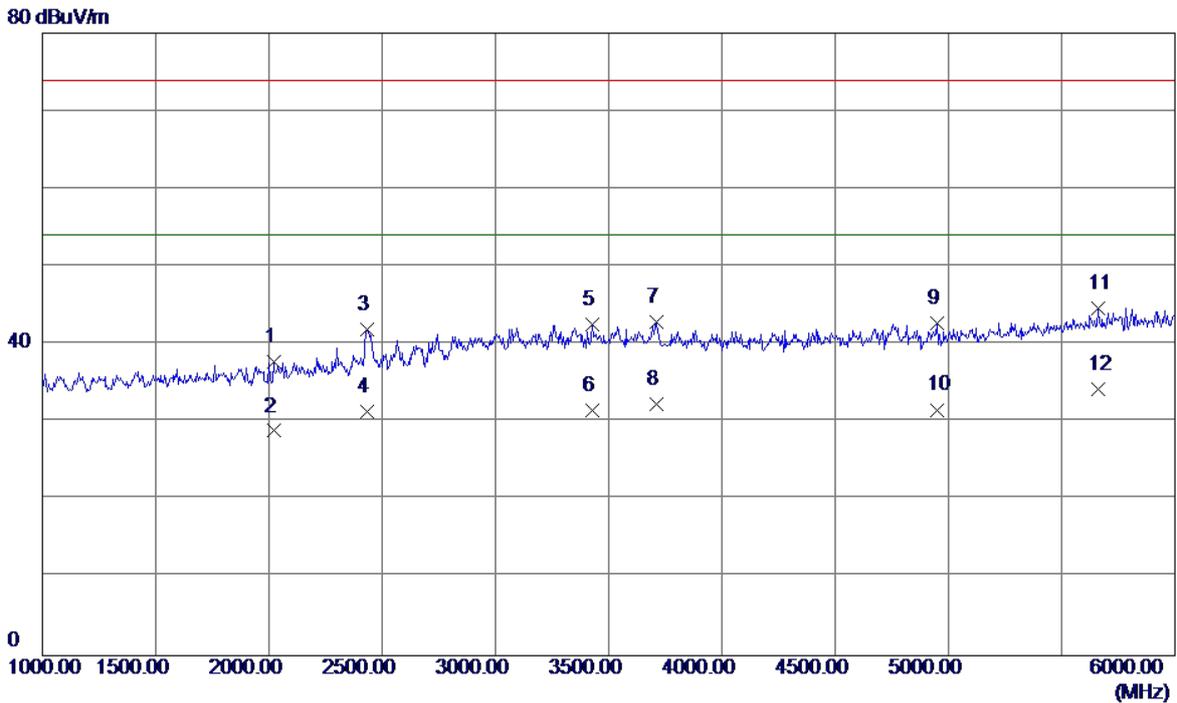


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2020.0000	39.15	-1.41	37.74	74.00	-36.26	Peak
2	2020.0000	30.29	-1.41	28.88	54.00	-25.12	AVG
3	2435.0000	41.07	0.81	41.88	74.00	-32.12	Peak
4	2435.0000	30.50	0.81	31.31	54.00	-22.69	AVG
5	3430.0000	37.31	5.25	42.56	74.00	-31.44	Peak
6	3430.0000	26.31	5.25	31.56	54.00	-22.44	AVG
7	3710.0000	37.43	5.51	42.94	74.00	-31.06	Peak
8	3710.0000	26.80	5.51	32.31	54.00	-21.69	AVG
9	4950.0000	35.47	7.30	42.77	74.00	-31.23	Peak
10	4950.0000	24.30	7.30	31.60	54.00	-22.40	AVG
11	5660.0000	34.90	9.80	44.70	74.00	-29.30	Peak
12 *	5660.0000	24.37	9.80	34.17	54.00	-19.83	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

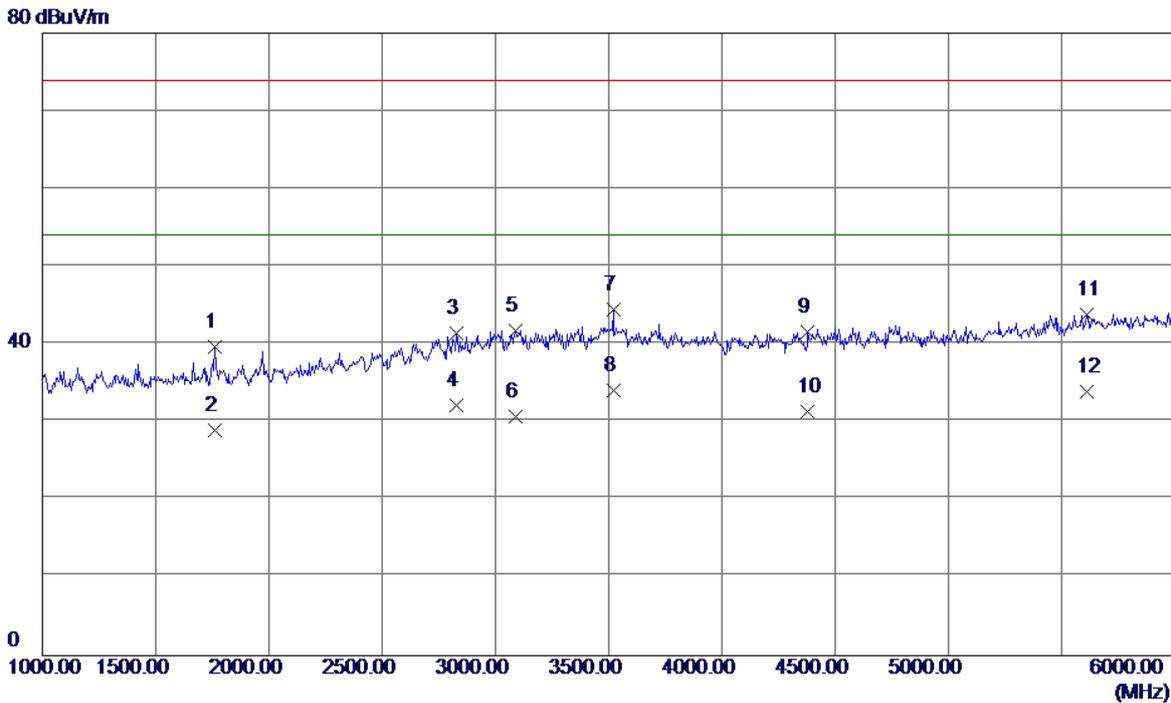


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1760.0000	42.12	-2.42	39.70	74.00	-34.30	Peak
2	1760.0000	31.31	-2.42	28.89	54.00	-25.11	AVG
3	2830.0000	38.35	3.13	41.48	74.00	-32.52	Peak
4	2830.0000	29.01	3.13	32.14	54.00	-21.86	AVG
5	3090.0000	37.45	4.37	41.82	74.00	-32.18	Peak
6	3090.0000	26.31	4.37	30.68	54.00	-23.32	AVG
7	3520.0000	39.03	5.44	44.47	74.00	-29.53	Peak
8 *	3520.0000	28.62	5.44	34.06	54.00	-19.94	AVG
9	4380.0000	35.31	6.27	41.58	74.00	-32.42	Peak
10	4380.0000	25.11	6.27	31.38	54.00	-22.62	AVG
11	5610.0000	34.24	9.61	43.85	74.00	-30.15	Peak
12	5610.0000	24.31	9.61	33.92	54.00	-20.08	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

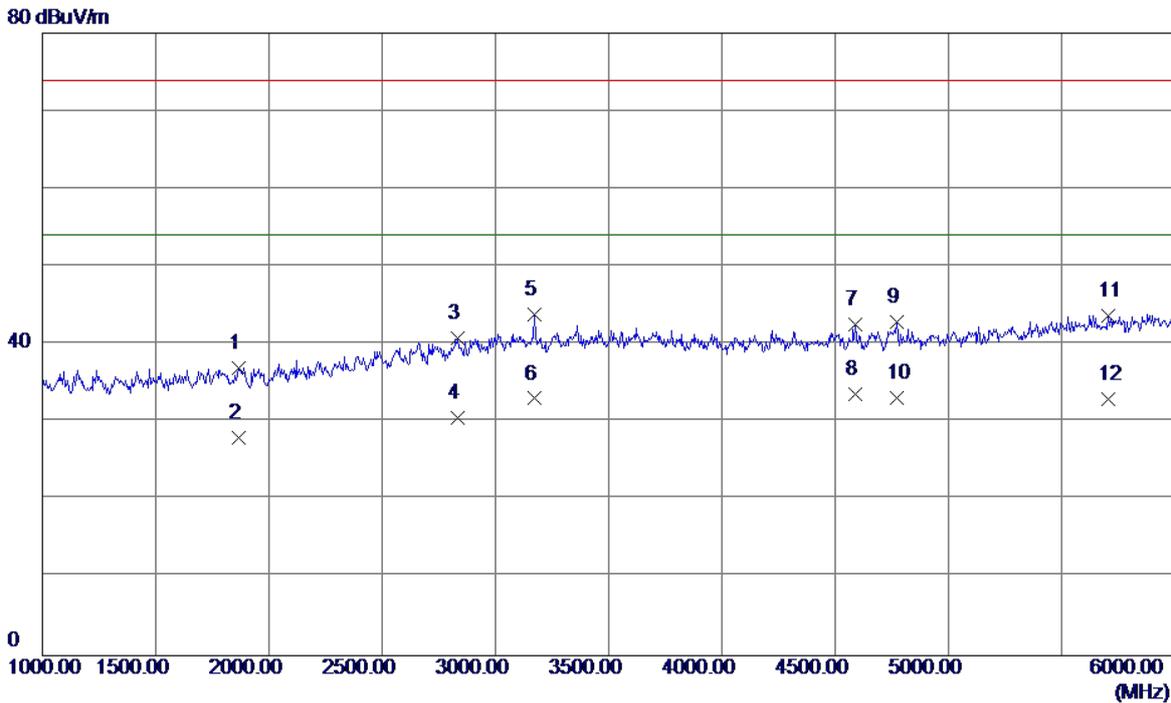


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1865.0000	39.01	-2.03	36.98	74.00	-37.02	Peak
2	1865.0000	30.10	-2.03	28.07	54.00	-25.93	AVG
3	2835.0000	37.63	3.15	40.78	74.00	-33.22	Peak
4	2835.0000	27.37	3.15	30.52	54.00	-23.48	AVG
5	3170.0000	39.19	4.58	43.77	74.00	-30.23	Peak
6	3170.0000	28.46	4.58	33.04	54.00	-20.96	AVG
7	4590.0000	35.84	6.65	42.49	74.00	-31.51	Peak
8 *	4590.0000	26.89	6.65	33.54	54.00	-20.46	AVG
9	4770.0000	35.91	6.97	42.88	74.00	-31.12	Peak
10	4770.0000	26.18	6.97	33.15	54.00	-20.85	AVG
11	5705.0000	33.78	9.97	43.75	74.00	-30.25	Peak
12	5705.0000	23.02	9.97	32.99	54.00	-21.01	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100U01 (US)+Battery:SCUD		
Test Engineer	Sam Wang		

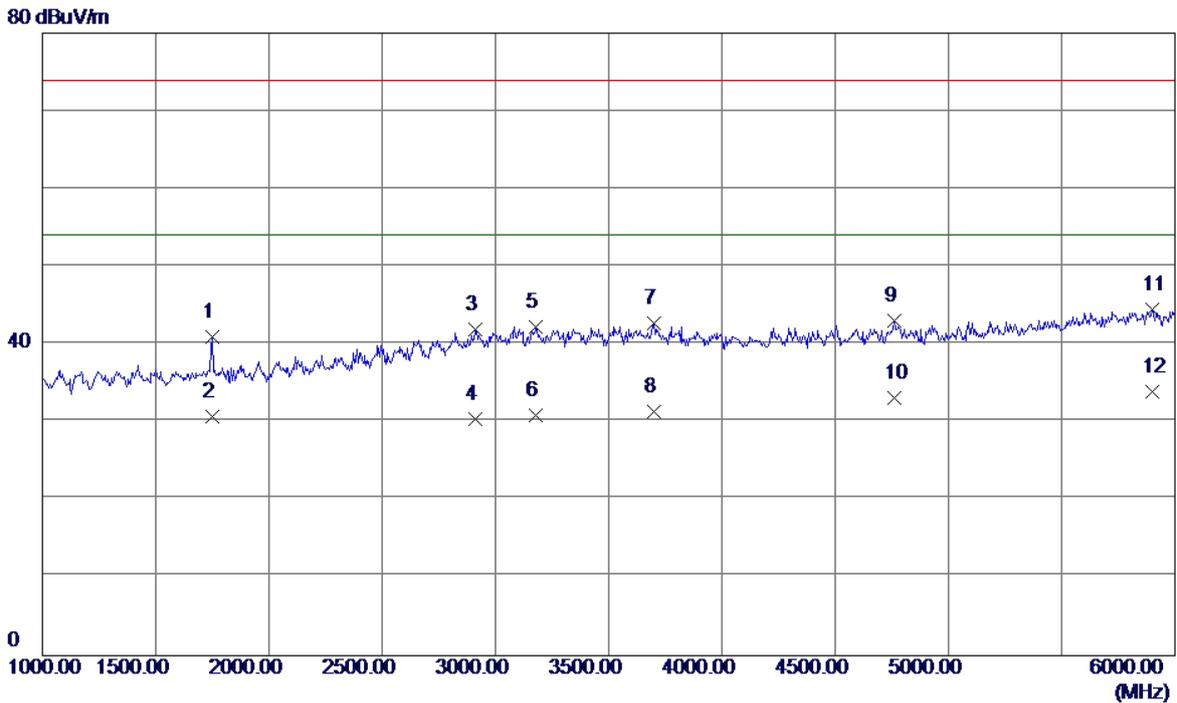


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1750.0000	43.46	-2.46	41.00	74.00	-33.00	Peak
2	1750.0000	33.12	-2.46	30.66	54.00	-23.34	AVG
3	2910.0000	38.33	3.60	41.93	74.00	-32.07	Peak
4	2910.0000	26.80	3.60	30.40	54.00	-23.60	AVG
5	3180.0000	37.60	4.61	42.21	74.00	-31.79	Peak
6	3180.0000	26.30	4.61	30.91	54.00	-23.09	AVG
7	3700.0000	37.16	5.51	42.67	74.00	-31.33	Peak
8	3700.0000	25.79	5.51	31.30	54.00	-22.70	AVG
9	4760.0000	36.02	6.96	42.98	74.00	-31.02	Peak
10	4760.0000	26.10	6.96	33.06	54.00	-20.94	AVG
11	5900.0000	33.78	10.71	44.49	74.00	-29.51	Peak
12 *	5900.0000	23.15	10.71	33.86	54.00	-20.14	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

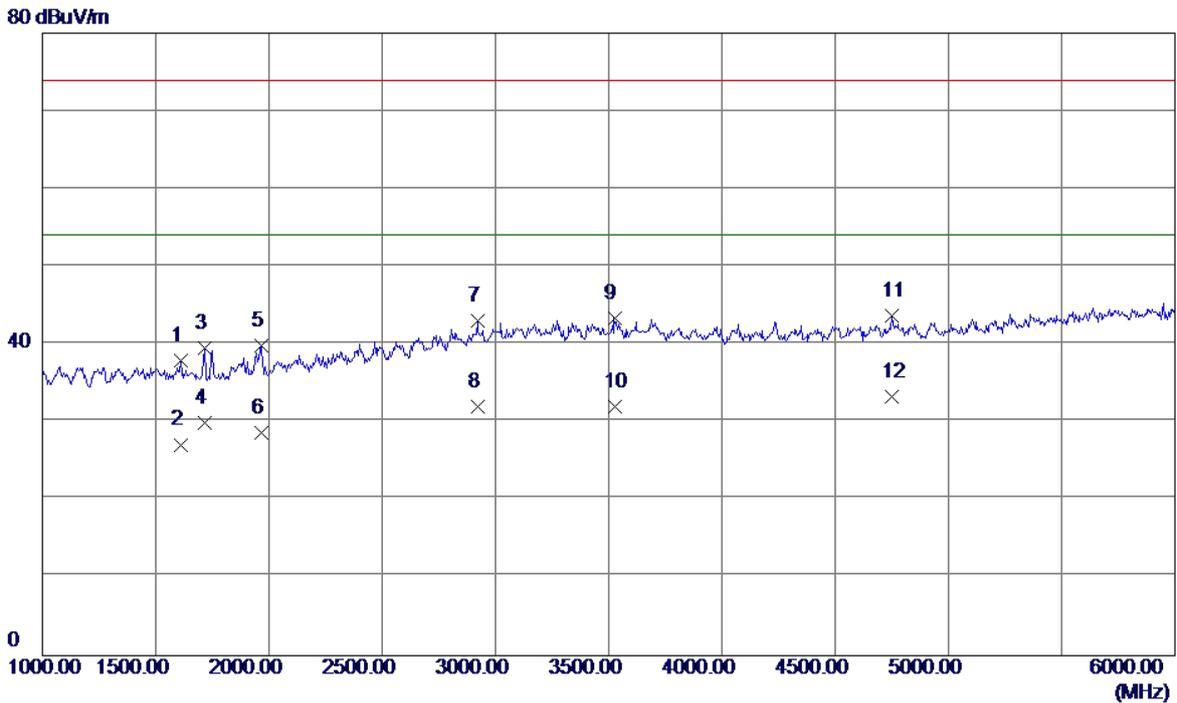


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1610.0000	40.83	-2.98	37.85	74.00	-36.15	Peak
2	1610.0000	30.10	-2.98	27.12	54.00	-26.88	AVG
3	1715.0000	42.17	-2.59	39.58	74.00	-34.42	Peak
4	1715.0000	32.50	-2.59	29.91	54.00	-24.09	AVG
5	1965.0000	41.54	-1.65	39.89	74.00	-34.11	Peak
6	1965.0000	30.29	-1.65	28.64	54.00	-25.36	AVG
7	2920.0000	39.39	3.66	43.05	74.00	-30.95	Peak
8	2920.0000	28.31	3.66	31.97	54.00	-22.03	AVG
9	3525.0000	37.86	5.44	43.30	74.00	-30.70	Peak
10	3525.0000	26.50	5.44	31.94	54.00	-22.06	AVG
11	4750.0000	36.78	6.94	43.72	74.00	-30.28	Peak
12 *	4750.0000	26.35	6.94	33.29	54.00	-20.71	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:BYD/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

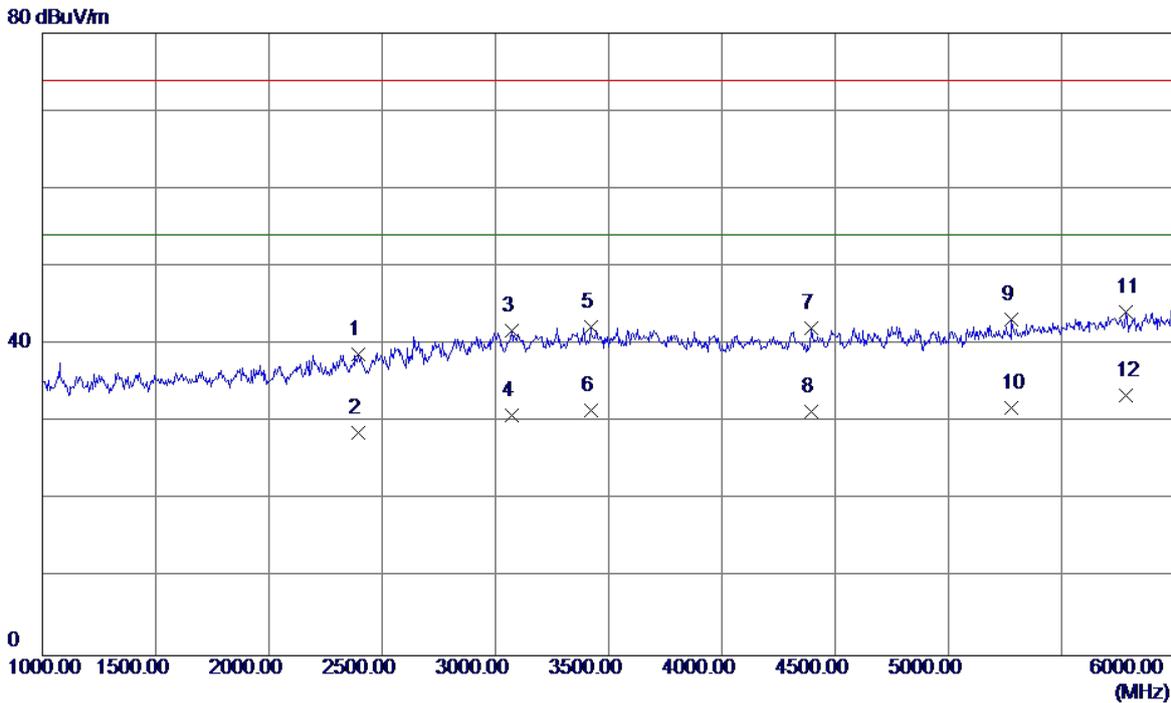


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2395.0000	38.10	0.59	38.69	74.00	-35.31	Peak
2	2395.0000	28.10	0.59	28.69	54.00	-25.31	AVG
3	3070.0000	37.37	4.32	41.69	74.00	-32.31	Peak
4	3070.0000	26.49	4.32	30.81	54.00	-23.19	AVG
5	3420.0000	37.08	5.23	42.31	74.00	-31.69	Peak
6	3420.0000	26.29	5.23	31.52	54.00	-22.48	AVG
7	4395.0000	35.76	6.30	42.06	74.00	-31.94	Peak
8	4395.0000	25.10	6.30	31.40	54.00	-22.60	AVG
9	5280.0000	34.84	8.40	43.24	74.00	-30.76	Peak
10	5280.0000	23.50	8.40	31.90	54.00	-22.10	AVG
11	5785.0000	33.89	10.28	44.17	74.00	-29.83	Peak
12 *	5785.0000	23.13	10.28	33.41	54.00	-20.59	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

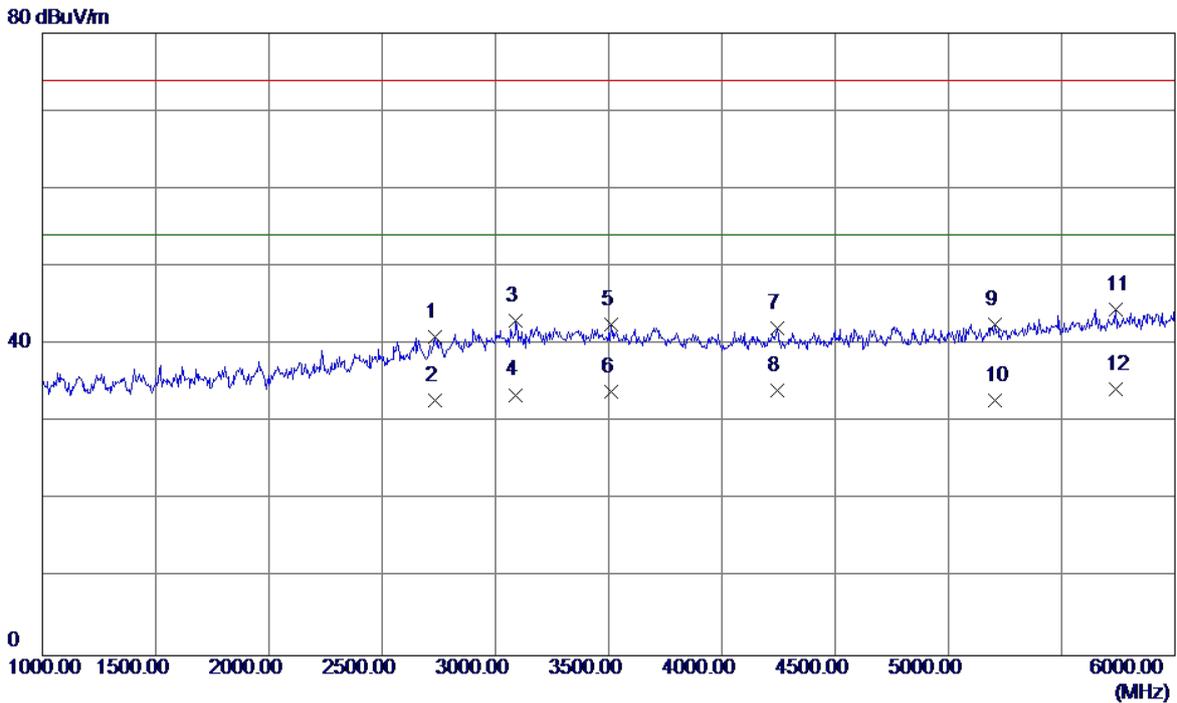


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2732.5000	38.37	2.54	40.91	74.00	-33.09	Peak
2	2732.5000	30.27	2.54	32.81	54.00	-21.19	AVG
3	3090.0000	38.60	4.37	42.97	74.00	-31.03	Peak
4	3090.0000	29.15	4.37	33.52	54.00	-20.48	AVG
5	3510.0000	37.06	5.44	42.50	74.00	-31.50	Peak
6	3510.0000	28.46	5.44	33.90	54.00	-20.10	AVG
7	4242.5000	35.99	6.03	42.02	74.00	-31.98	Peak
8	4242.5000	28.02	6.03	34.05	54.00	-19.95	AVG
9	5205.0000	34.48	8.13	42.61	74.00	-31.39	Peak
10	5205.0000	24.65	8.13	32.78	54.00	-21.22	AVG
11	5740.0000	34.45	10.10	44.55	74.00	-29.45	Peak
12 *	5740.0000	24.12	10.10	34.22	54.00	-19.78	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

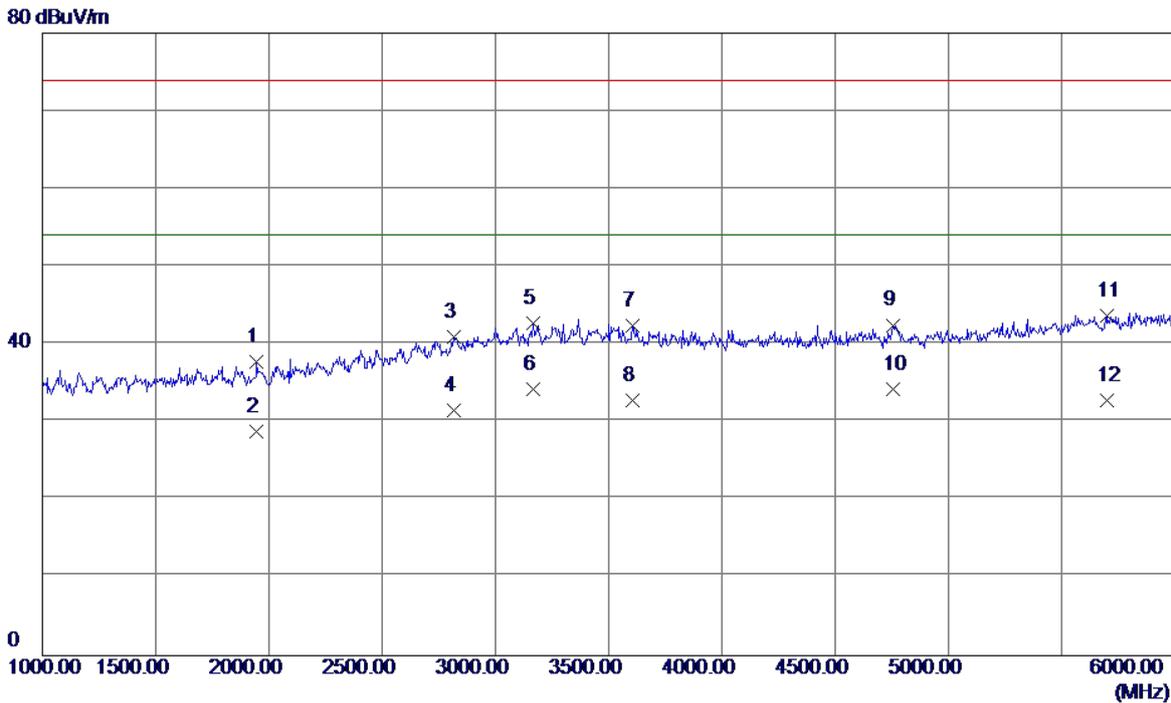


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1945.0000	39.50	-1.73	37.77	74.00	-36.23	Peak
2	1945.0000	30.57	-1.73	28.84	54.00	-25.16	AVG
3	2817.5000	37.86	3.05	40.91	74.00	-33.09	Peak
4	2817.5000	28.45	3.05	31.50	54.00	-22.50	AVG
5	3167.5000	38.11	4.57	42.68	74.00	-31.32	Peak
6	3167.5000	29.65	4.57	34.22	54.00	-19.78	AVG
7	3607.5000	36.98	5.47	42.45	74.00	-31.55	Peak
8	3607.5000	27.35	5.47	32.82	54.00	-21.18	AVG
9	4755.0000	35.53	6.95	42.48	74.00	-31.52	Peak
10 *	4755.0000	27.35	6.95	34.30	54.00	-19.70	AVG
11	5697.5000	33.79	9.94	43.73	74.00	-30.27	Peak
12	5697.5000	22.89	9.94	32.83	54.00	-21.17	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

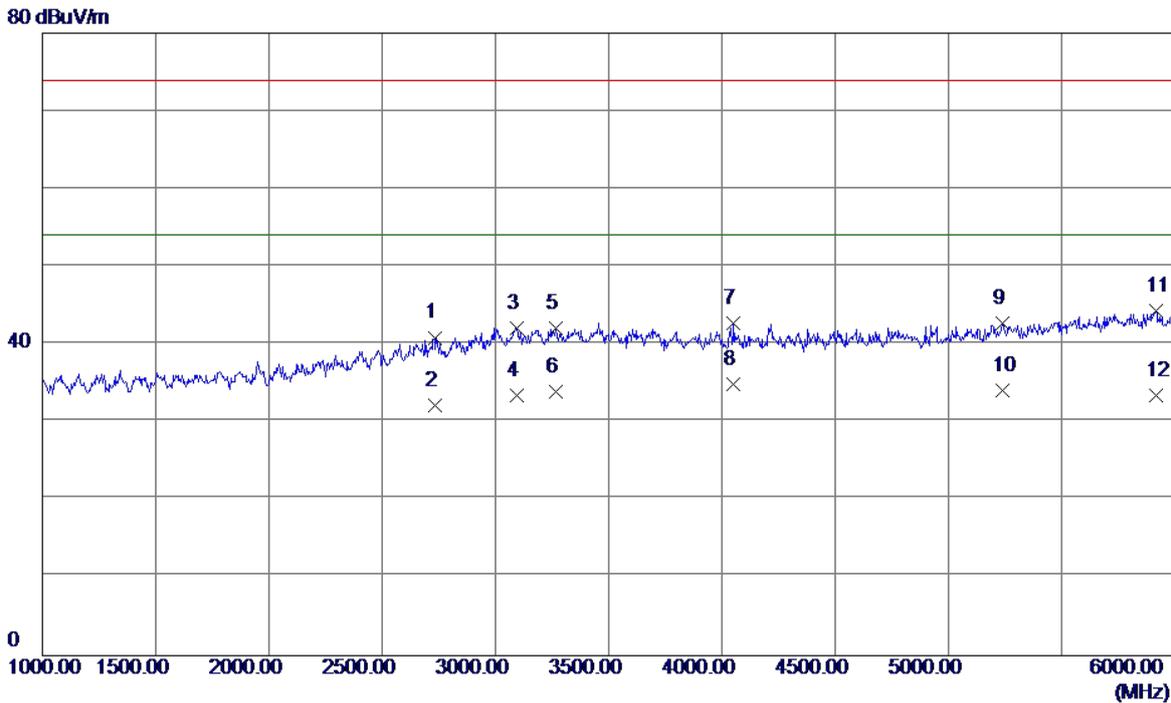


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2732.5000	38.34	2.54	40.88	74.00	-33.12	Peak
2	2732.5000	29.66	2.54	32.20	54.00	-21.80	AVG
3	3092.5000	37.69	4.38	42.07	74.00	-31.93	Peak
4	3092.5000	29.12	4.38	33.50	54.00	-20.50	AVG
5	3267.5000	37.25	4.83	42.08	74.00	-31.92	Peak
6	3267.5000	29.06	4.83	33.89	54.00	-20.11	AVG
7	4052.5000	37.00	5.70	42.70	74.00	-31.30	Peak
8 *	4052.5000	29.14	5.70	34.84	54.00	-19.16	AVG
9	5240.0000	34.51	8.26	42.77	74.00	-31.23	Peak
10	5240.0000	25.78	8.26	34.04	54.00	-19.96	AVG
11	5915.0000	33.59	10.77	44.36	74.00	-29.64	Peak
12	5915.0000	22.67	10.77	33.44	54.00	-20.56	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

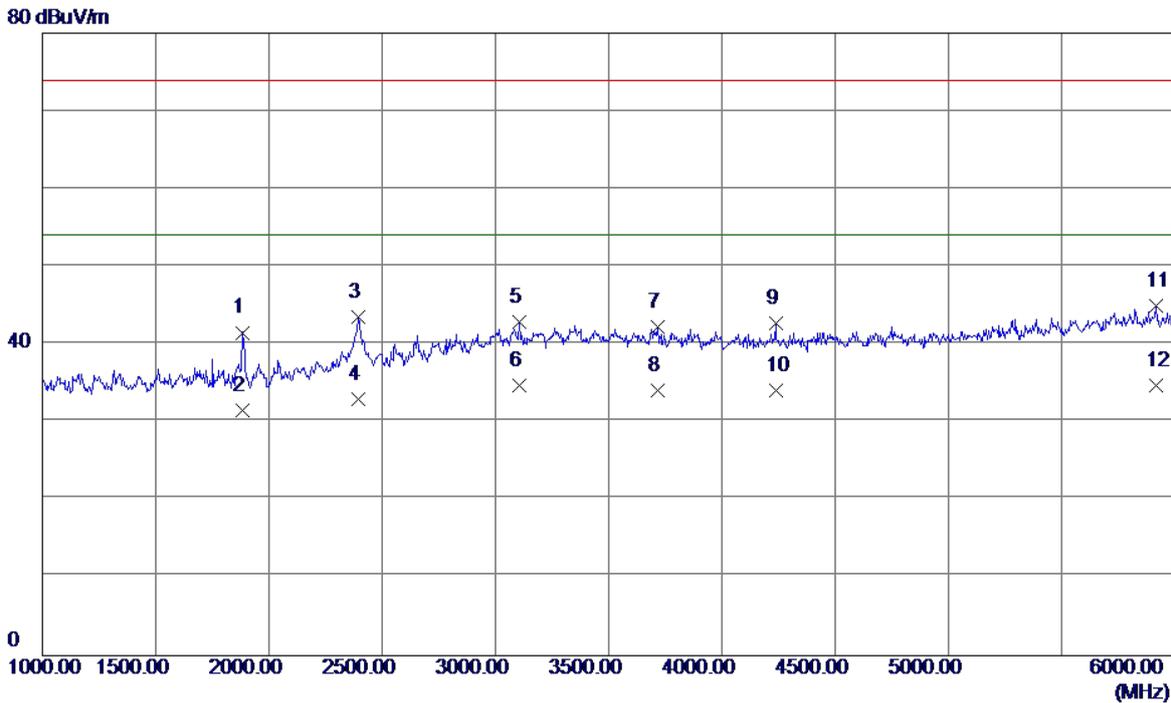


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1885.0000	43.47	-1.95	41.52	74.00	-32.48	Peak
2	1885.0000	33.43	-1.95	31.48	54.00	-22.52	AVG
3	2392.5000	42.89	0.58	43.47	74.00	-30.53	Peak
4	2392.5000	32.45	0.58	33.03	54.00	-20.97	AVG
5	3105.0000	38.42	4.41	42.83	74.00	-31.17	Peak
6	3105.0000	30.24	4.41	34.65	54.00	-19.35	AVG
7	3715.0000	36.80	5.51	42.31	74.00	-31.69	Peak
8	3715.0000	28.53	5.51	34.04	54.00	-19.96	AVG
9	4237.5000	36.62	6.03	42.65	74.00	-31.35	Peak
10	4237.5000	28.04	6.03	34.07	54.00	-19.93	AVG
11	5917.5000	34.13	10.78	44.91	74.00	-29.09	Peak
12 *	5917.5000	23.89	10.78	34.67	54.00	-19.33	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

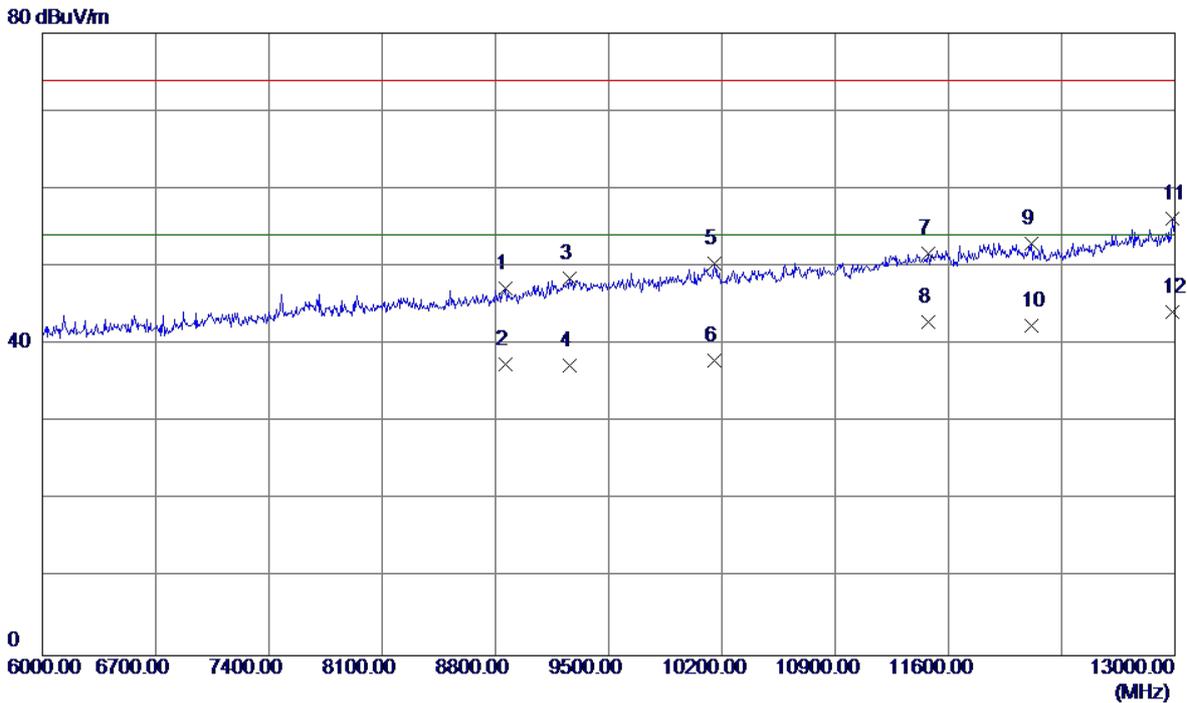


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	8863.0000	32.21	14.96	47.17	74.00	-26.83	Peak
2	8863.0000	22.50	14.96	37.46	54.00	-16.54	AVG
3	9262.0000	32.84	15.67	48.51	74.00	-25.49	Peak
4	9262.0000	21.60	15.67	37.27	54.00	-16.73	AVG
5	10151.0000	32.99	17.44	50.43	74.00	-23.57	Peak
6	10151.0000	20.41	17.44	37.85	54.00	-16.15	AVG
7	11474.0000	30.81	20.95	51.76	74.00	-22.24	Peak
8	11474.0000	21.90	20.95	42.85	54.00	-11.15	AVG
9	12111.0000	31.56	21.41	52.97	74.00	-21.03	Peak
10	12111.0000	21.05	21.41	42.46	54.00	-11.54	AVG
11	12986.0000	32.29	23.83	56.12	74.00	-17.88	Peak
12 *	12986.0000	20.31	23.83	44.14	54.00	-9.86	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter +WIFI+BT+GPS+Camera on		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

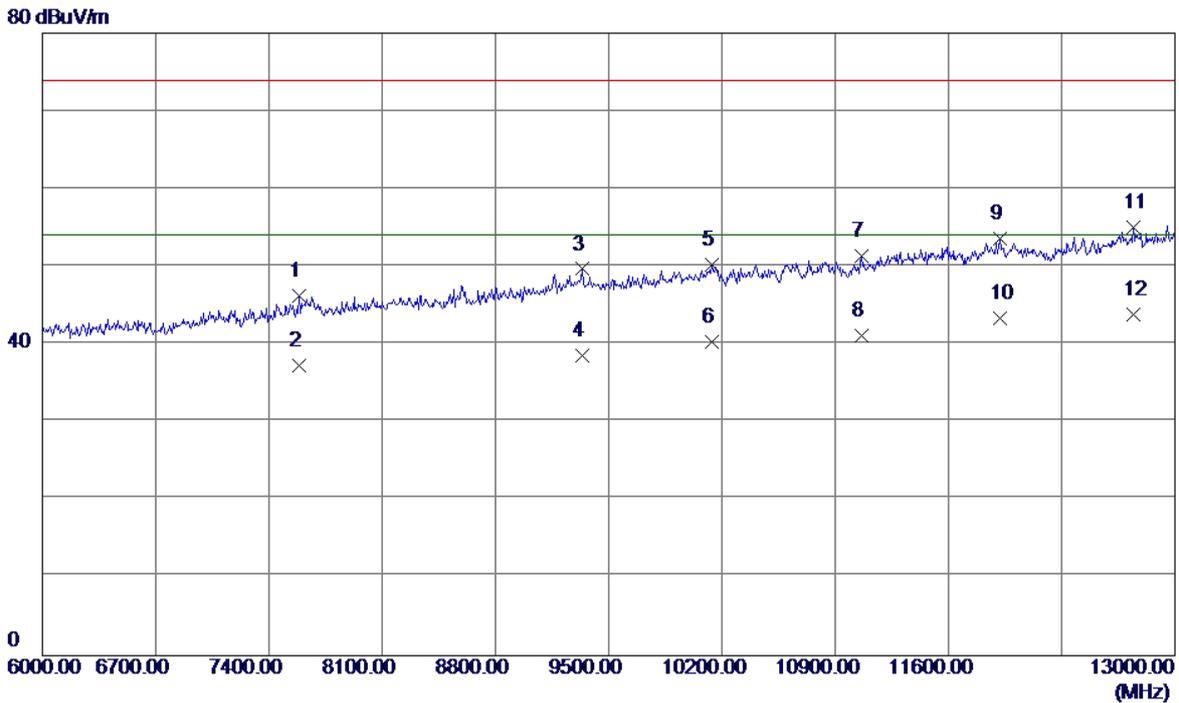


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7589.0000	33.41	12.85	46.26	74.00	-27.74	Peak
2	7589.0000	24.49	12.85	37.34	54.00	-16.66	AVG
3	9339.0000	33.92	15.76	49.68	74.00	-24.32	Peak
4	9339.0000	22.80	15.76	38.56	54.00	-15.44	AVG
5	10137.0000	32.87	17.41	50.28	74.00	-23.72	Peak
6	10137.0000	22.90	17.41	40.31	54.00	-13.69	AVG
7	11061.0000	31.81	19.49	51.30	74.00	-22.70	Peak
8	11061.0000	21.60	19.49	41.09	54.00	-12.91	AVG
9	11922.0000	32.25	21.32	53.57	74.00	-20.43	Peak
10	11922.0000	21.99	21.32	43.31	54.00	-10.69	AVG
11	12741.0000	32.36	22.67	55.03	74.00	-18.97	Peak
12 *	12741.0000	21.17	22.67	43.84	54.00	-10.16	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

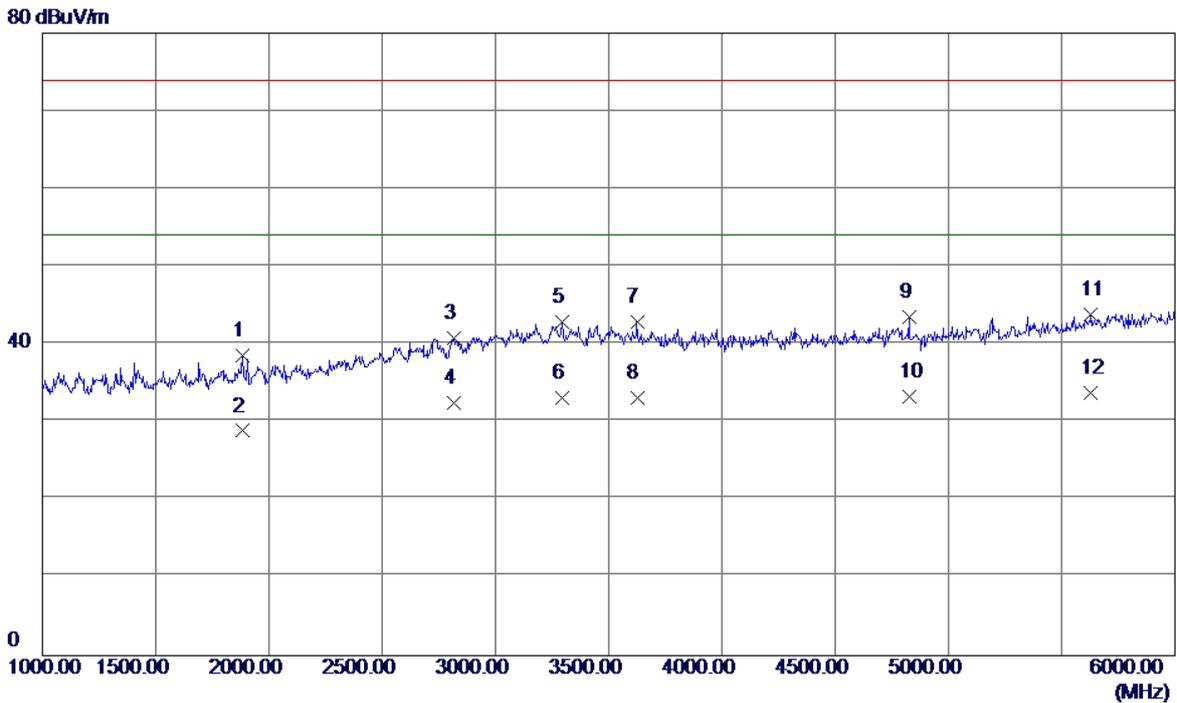


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1885.0000	40.52	-1.95	38.57	74.00	-35.43	Peak
2	1885.0000	30.83	-1.95	28.88	54.00	-25.12	AVG
3	2815.0000	37.71	3.04	40.75	74.00	-33.25	Peak
4	2815.0000	29.44	3.04	32.48	54.00	-21.52	AVG
5	3295.0000	37.91	4.90	42.81	74.00	-31.19	Peak
6	3295.0000	28.16	4.90	33.06	54.00	-20.94	AVG
7	3625.0000	37.45	5.48	42.93	74.00	-31.07	Peak
8	3625.0000	27.68	5.48	33.16	54.00	-20.84	AVG
9	4827.5000	36.46	7.08	43.54	74.00	-30.46	Peak
10	4827.5000	26.13	7.08	33.21	54.00	-20.79	AVG
11	5630.0000	34.19	9.69	43.88	74.00	-30.12	Peak
12 *	5630.0000	24.05	9.69	33.74	54.00	-20.26	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

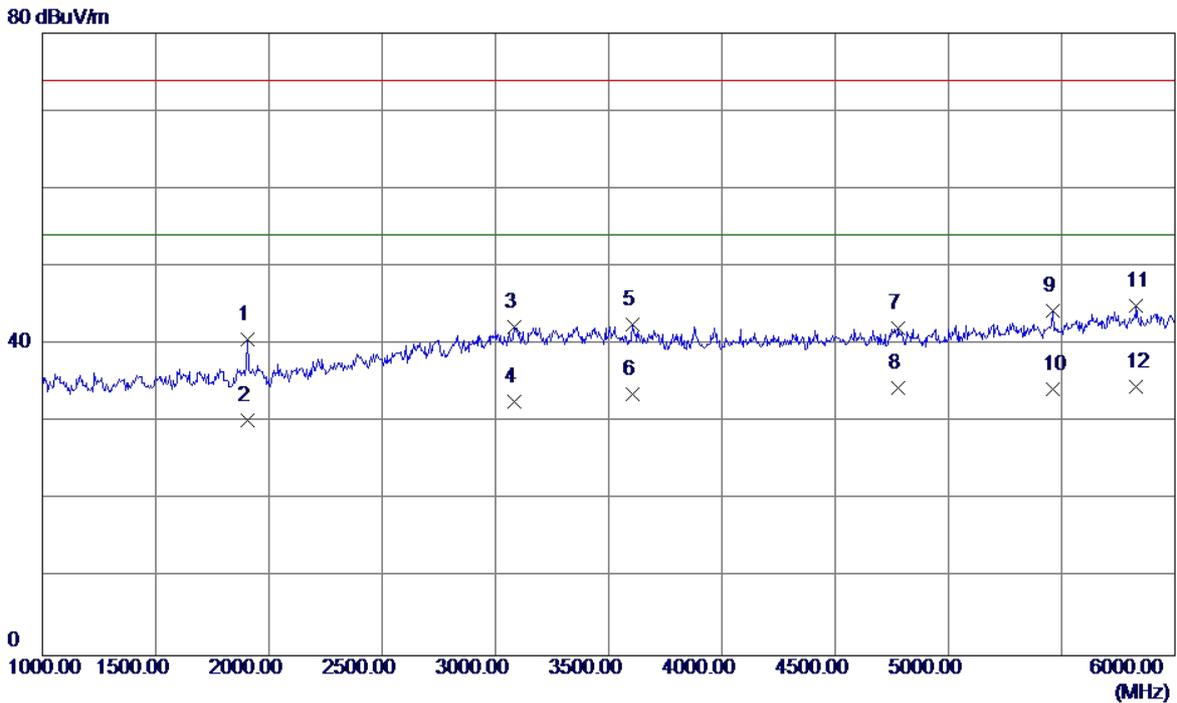


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1905.0000	42.56	-1.88	40.68	74.00	-33.32	Peak
2	1905.0000	32.11	-1.88	30.23	54.00	-23.77	AVG
3	3082.5000	37.95	4.35	42.30	74.00	-31.70	Peak
4	3082.5000	28.36	4.35	32.71	54.00	-21.29	AVG
5	3607.5000	37.04	5.47	42.51	74.00	-31.49	Peak
6	3607.5000	28.12	5.47	33.59	54.00	-20.41	AVG
7	4780.0000	35.04	6.99	42.03	74.00	-31.97	Peak
8	4780.0000	27.45	6.99	34.44	54.00	-19.56	AVG
9	5462.5000	35.30	9.06	44.36	74.00	-29.64	Peak
10	5462.5000	25.17	9.06	34.23	54.00	-19.77	AVG
11	5830.0000	34.53	10.45	44.98	74.00	-29.02	Peak
12 *	5830.0000	24.12	10.45	34.57	54.00	-19.43	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

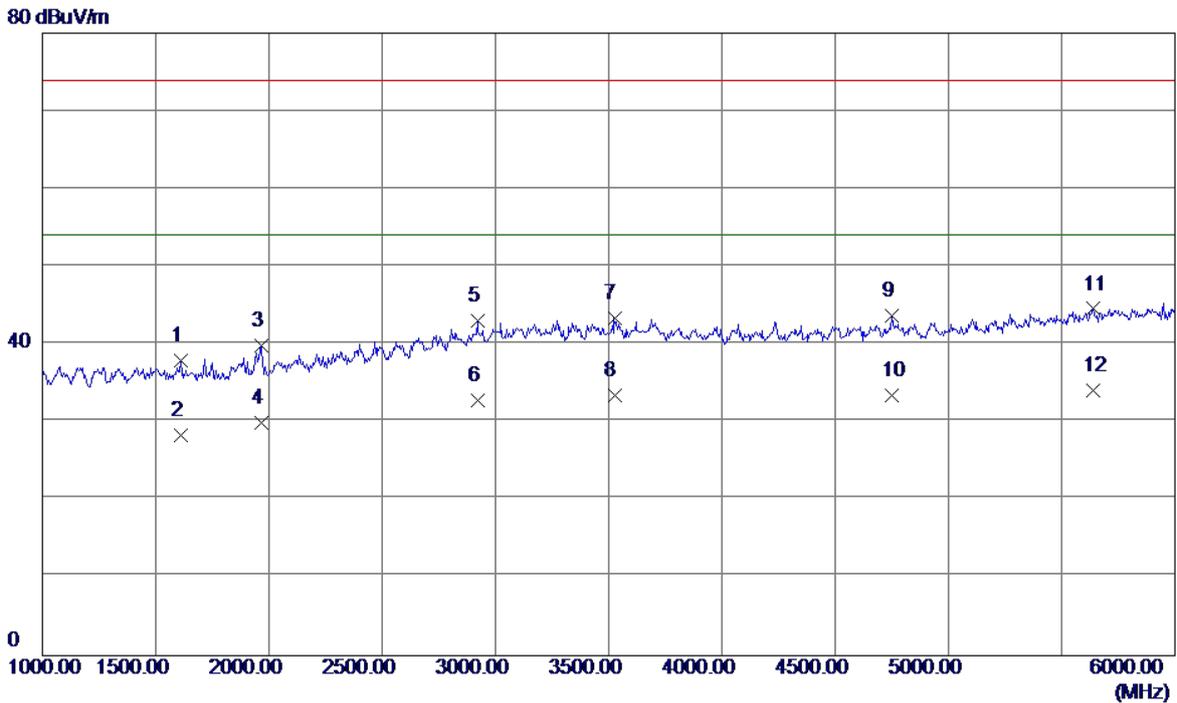


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1610.0000	40.83	-2.98	37.85	74.00	-36.15	Peak
2	1610.0000	31.26	-2.98	28.28	54.00	-25.72	AVG
3	1965.0000	41.54	-1.65	39.89	74.00	-34.11	Peak
4	1965.0000	31.61	-1.65	29.96	54.00	-24.04	AVG
5	2920.0000	39.39	3.66	43.05	74.00	-30.95	Peak
6	2920.0000	29.15	3.66	32.81	54.00	-21.19	AVG
7	3525.0000	37.86	5.44	43.30	74.00	-30.70	Peak
8	3525.0000	28.01	5.44	33.45	54.00	-20.55	AVG
9	4750.0000	36.78	6.94	43.72	74.00	-30.28	Peak
10	4750.0000	26.53	6.94	33.47	54.00	-20.53	AVG
11	5640.0000	34.83	9.73	44.56	74.00	-29.44	Peak
12 *	5640.0000	24.39	9.73	34.12	54.00	-19.88	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earphone		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

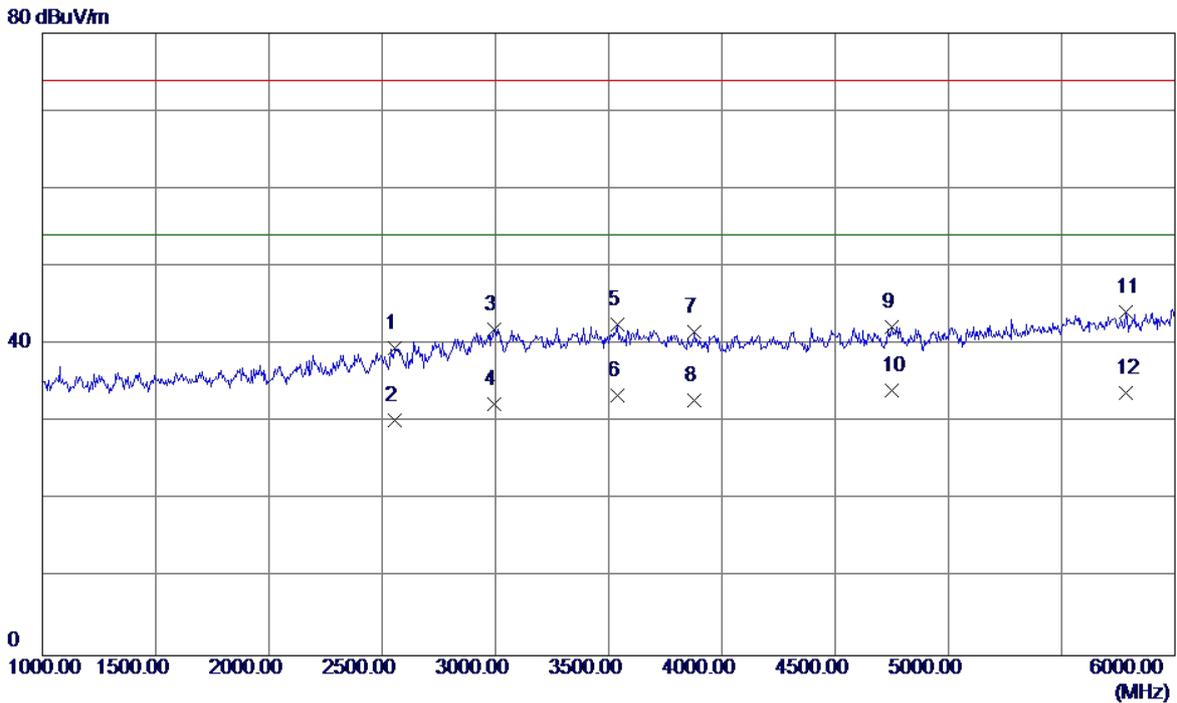

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2555.0000	38.03	1.48	39.51	74.00	-34.49	Peak
2	2555.0000	28.69	1.48	30.17	54.00	-23.83	AVG
3	2995.0000	37.85	4.11	41.96	74.00	-32.04	Peak
4	2995.0000	28.24	4.11	32.35	54.00	-21.65	AVG
5	3540.0000	37.18	5.45	42.63	74.00	-31.37	Peak
6	3540.0000	28.01	5.45	33.46	54.00	-20.54	AVG
7	3880.0000	36.08	5.57	41.65	74.00	-32.35	Peak
8	3880.0000	27.26	5.57	32.83	54.00	-21.17	AVG
9	4750.0000	35.29	6.94	42.23	74.00	-31.77	Peak
10 *	4750.0000	27.21	6.94	34.15	54.00	-19.85	AVG
11	5785.0000	33.88	10.28	44.16	74.00	-29.84	Peak
12	5785.0000	23.53	10.28	33.81	54.00	-20.19	AVG


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

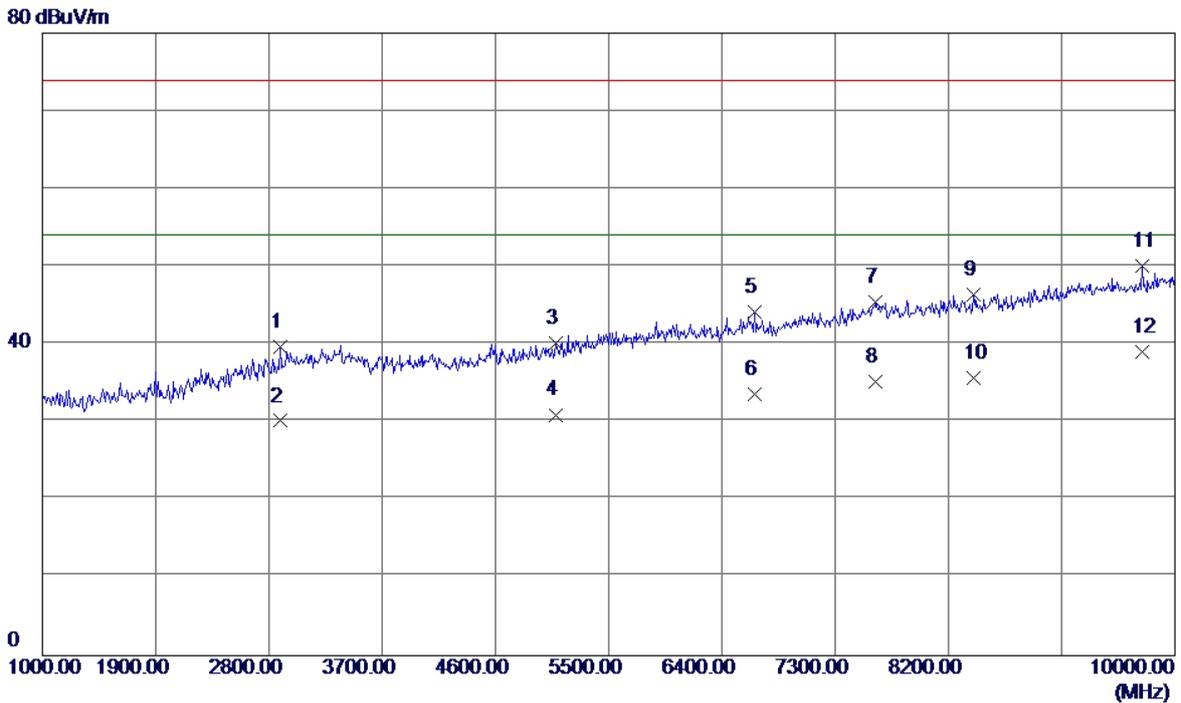

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	2890.0000	37.26	2.36	39.62	74.00	-34.38	Peak
2	2890.0000	27.80	2.36	30.16	54.00	-23.84	AVG
3	5077.0000	33.41	6.76	40.17	74.00	-33.83	Peak
4	5077.0000	24.20	6.76	30.96	54.00	-23.04	AVG
5	6661.0000	33.55	10.54	44.09	74.00	-29.91	Peak
6	6661.0000	23.09	10.54	33.63	54.00	-20.37	AVG
7	7624.0000	32.59	12.89	45.48	74.00	-28.52	Peak
8	7624.0000	22.34	12.89	35.23	54.00	-18.77	AVG
9	8398.0000	32.53	13.85	46.38	74.00	-27.62	Peak
10	8398.0000	21.90	13.85	35.75	54.00	-18.25	AVG
11	9739.0000	33.67	16.48	50.15	74.00	-23.85	Peak
12 *	9739.0000	22.50	16.48	38.98	54.00	-15.02	AVG


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

80 dBuV/m

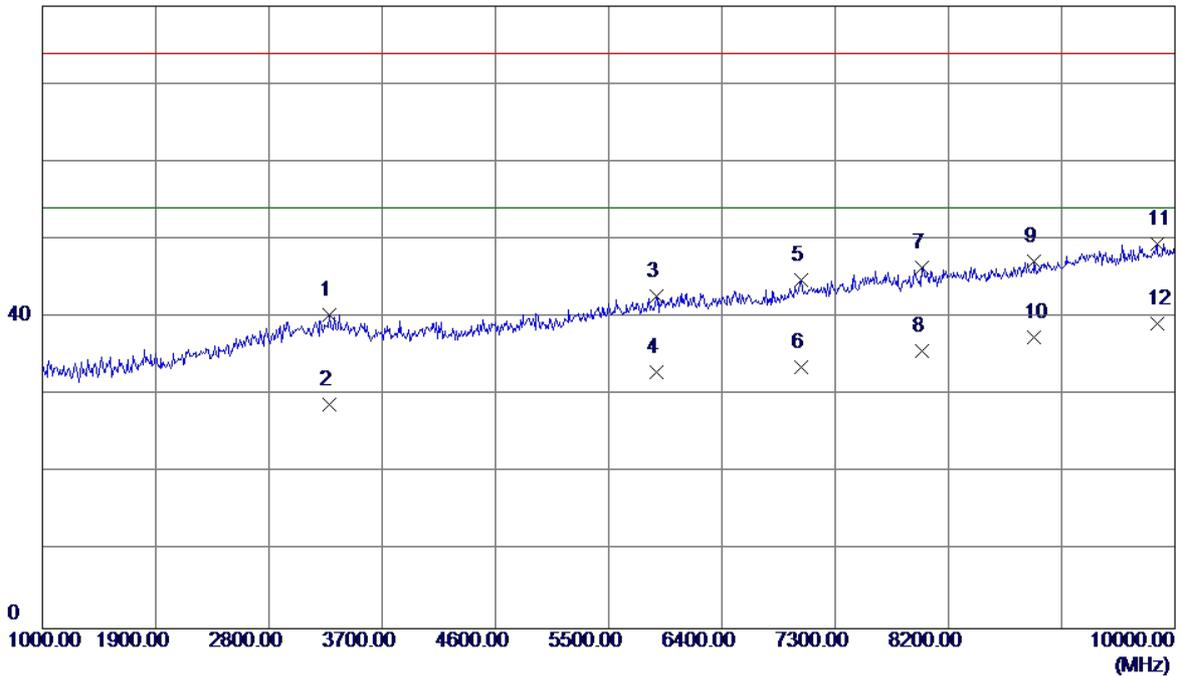


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3277.0000	36.71	3.59	40.30	74.00	-33.70	Peak
2	3277.0000	25.20	3.59	28.79	54.00	-25.21	AVG
3	5878.0000	33.27	9.47	42.74	74.00	-31.26	Peak
4	5878.0000	23.44	9.47	32.91	54.00	-21.09	AVG
5	7030.0000	33.53	11.27	44.80	74.00	-29.20	Peak
6	7030.0000	22.30	11.27	33.57	54.00	-20.43	AVG
7	7993.0000	33.12	13.32	46.44	74.00	-27.56	Peak
8	7993.0000	22.40	13.32	35.72	54.00	-18.28	AVG
9	8884.0000	32.18	15.02	47.20	74.00	-26.80	Peak
10	8884.0000	22.35	15.02	37.37	54.00	-16.63	AVG
11	9856.0000	32.77	16.73	49.50	74.00	-24.50	Peak
12 *	9856.0000	22.52	16.73	39.25	54.00	-14.75	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

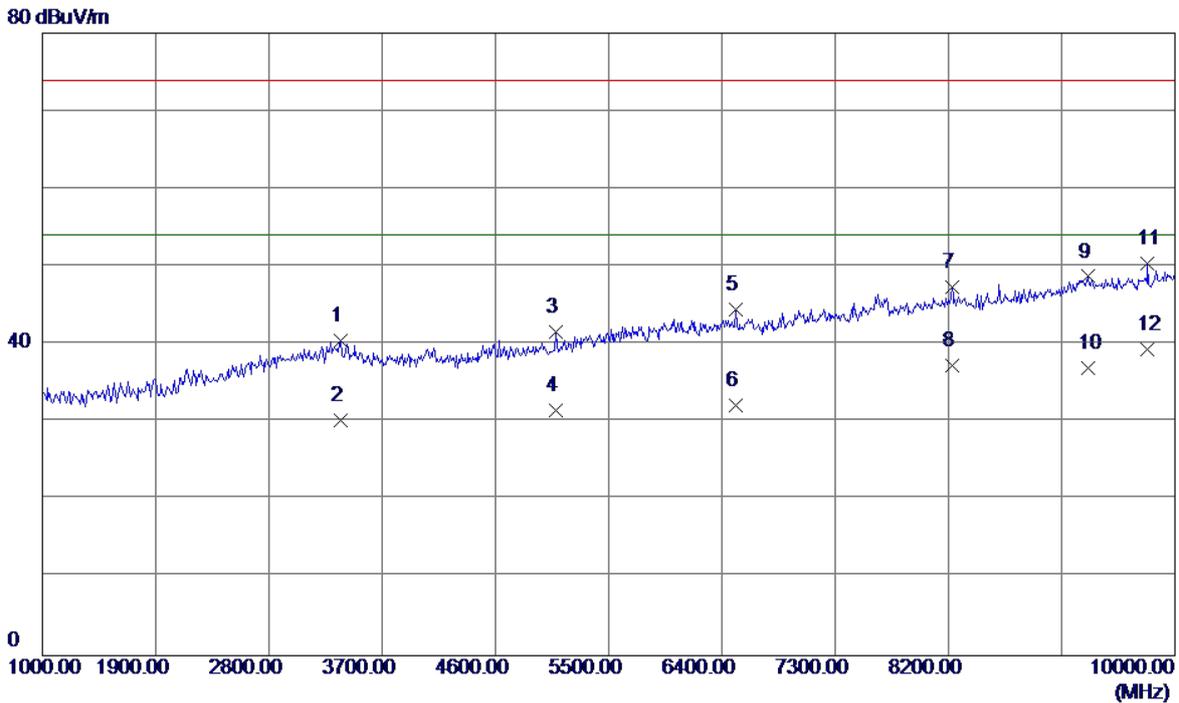

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3367.0000	36.72	3.79	40.51	74.00	-33.49	Peak
2	3367.0000	26.50	3.79	30.29	54.00	-23.71	AVG
3	5077.0000	34.89	6.76	41.65	74.00	-32.35	Peak
4	5077.0000	24.80	6.76	31.56	54.00	-22.44	AVG
5	6508.0000	34.23	10.25	44.48	74.00	-29.52	Peak
6	6508.0000	21.90	10.25	32.15	54.00	-21.85	AVG
7	8227.0000	33.80	13.63	47.43	74.00	-26.57	Peak
8	8227.0000	23.70	13.63	37.33	54.00	-16.67	AVG
9	9307.0000	33.00	15.72	48.72	74.00	-25.28	Peak
10	9307.0000	21.20	15.72	36.92	54.00	-17.08	AVG
11	9784.0000	33.87	16.58	50.45	74.00	-23.55	Peak
12 *	9784.0000	22.79	16.58	39.37	54.00	-14.63	AVG


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

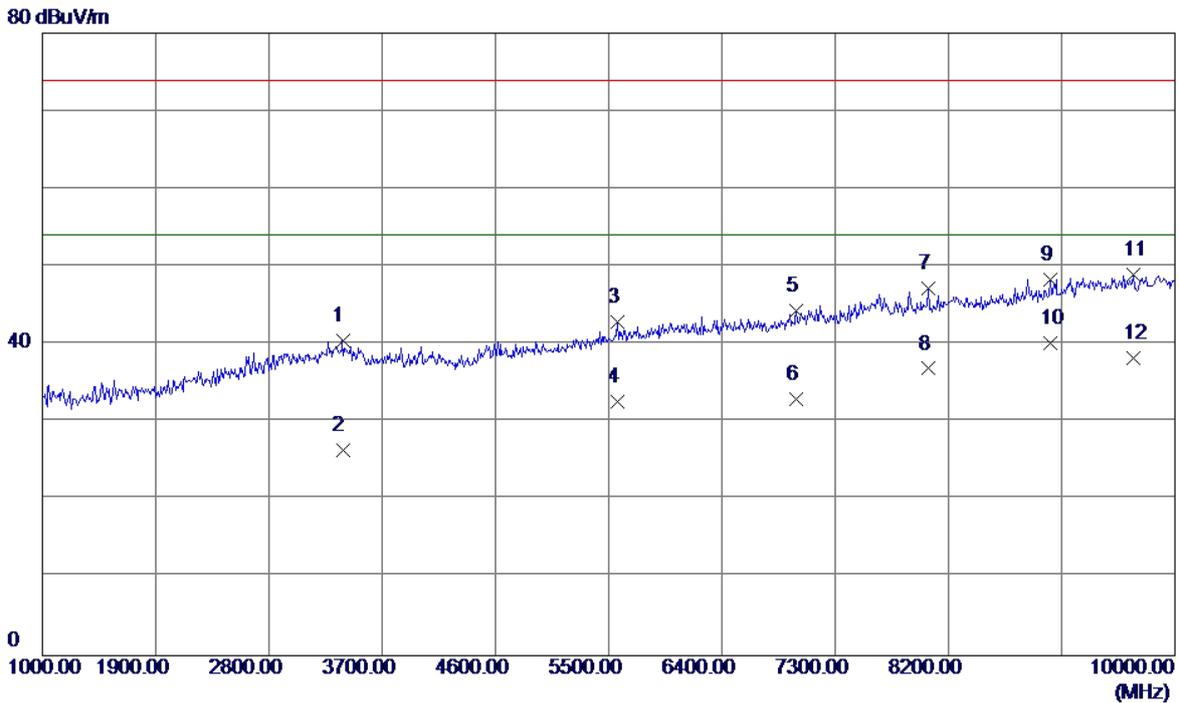

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3385.0000	36.65	3.83	40.48	74.00	-33.52	Peak
2	3385.0000	22.51	3.83	26.34	54.00	-27.66	AVG
3	5572.0000	34.53	8.40	42.93	74.00	-31.07	Peak
4	5572.0000	24.31	8.40	32.71	54.00	-21.29	AVG
5	6994.0000	33.11	11.17	44.28	74.00	-29.72	Peak
6	6994.0000	21.80	11.17	32.97	54.00	-21.03	AVG
7	8038.0000	33.85	13.38	47.23	74.00	-26.77	Peak
8	8038.0000	23.50	13.38	36.88	54.00	-17.12	AVG
9	9010.0000	33.05	15.34	48.39	74.00	-25.61	Peak
10 *	9010.0000	24.81	15.34	40.15	54.00	-13.85	AVG
11	9667.0000	32.68	16.33	49.01	74.00	-24.99	Peak
12	9667.0000	21.90	16.33	38.23	54.00	-15.77	AVG


EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

80 dBuV/m

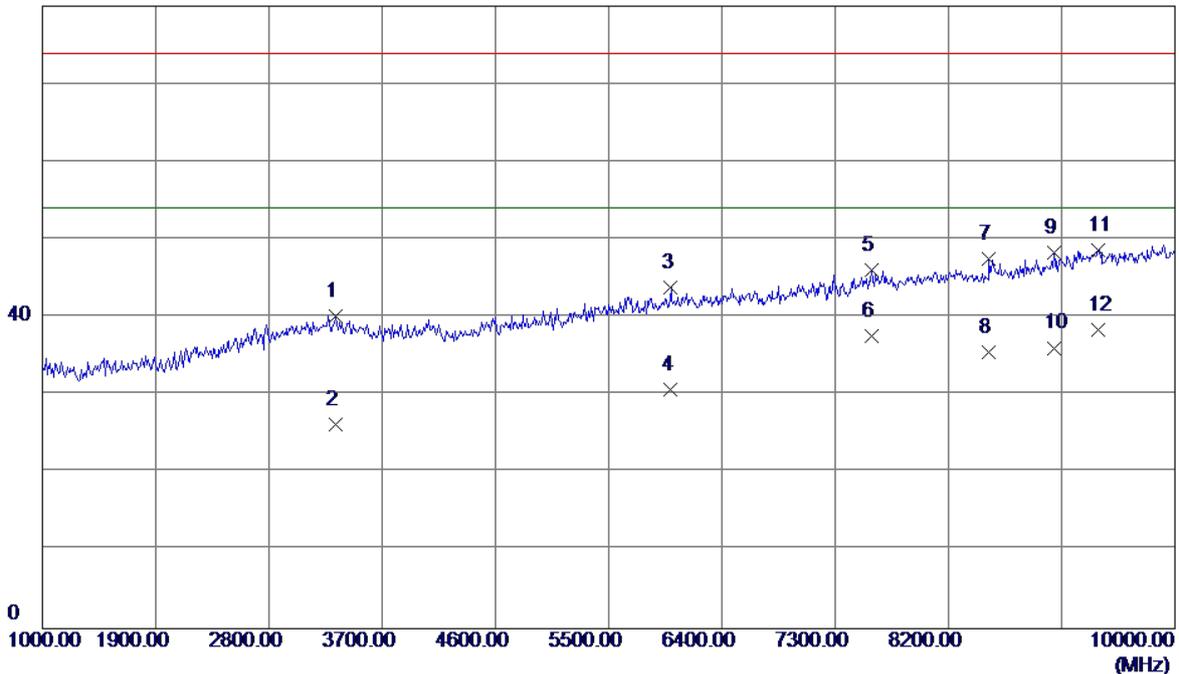


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3331.0000	36.48	3.71	40.19	74.00	-33.81	Peak
2	3331.0000	22.60	3.71	26.31	54.00	-27.69	AVG
3	5995.0000	33.95	9.87	43.82	74.00	-30.18	Peak
4	5995.0000	20.80	9.87	30.67	54.00	-23.33	AVG
5	7588.0000	33.20	12.85	46.05	74.00	-27.95	Peak
6	7588.0000	24.69	12.85	37.54	54.00	-16.46	AVG
7	8524.0000	33.41	14.04	47.45	74.00	-26.55	Peak
8	8524.0000	21.50	14.04	35.54	54.00	-18.46	AVG
9	9037.0000	32.95	15.38	48.33	74.00	-25.67	Peak
10	9037.0000	20.70	15.38	36.08	54.00	-17.92	AVG
11	9388.0000	32.87	15.83	48.70	74.00	-25.30	Peak
12 *	9388.0000	22.59	15.83	38.42	54.00	-15.58	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

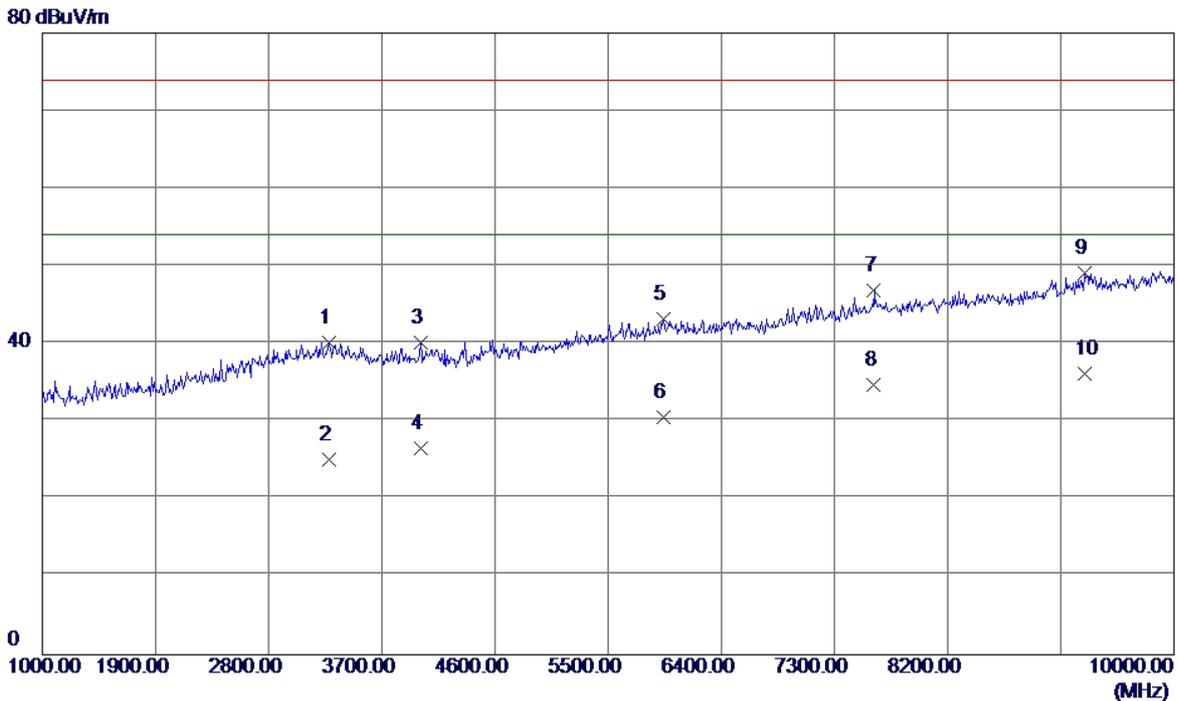


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	3277.0000	36.61	3.59	40.20	74.00	-33.80	Peak
2	3277.0000	21.60	3.59	25.19	54.00	-28.81	AVG
3	4006.0000	36.09	4.11	40.20	74.00	-33.80	Peak
4	4006.0000	22.50	4.11	26.61	54.00	-27.39	AVG
5	5941.0000	33.54	9.69	43.23	74.00	-30.77	Peak
6	5941.0000	20.80	9.69	30.49	54.00	-23.51	AVG
7	7615.0000	34.00	12.88	46.88	74.00	-27.12	Peak
8	7615.0000	21.90	12.88	34.78	54.00	-19.22	AVG
9	9289.0000	33.43	15.70	49.13	74.00	-24.87	Peak
10 *	9289.0000	20.40	15.70	36.10	54.00	-17.90	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

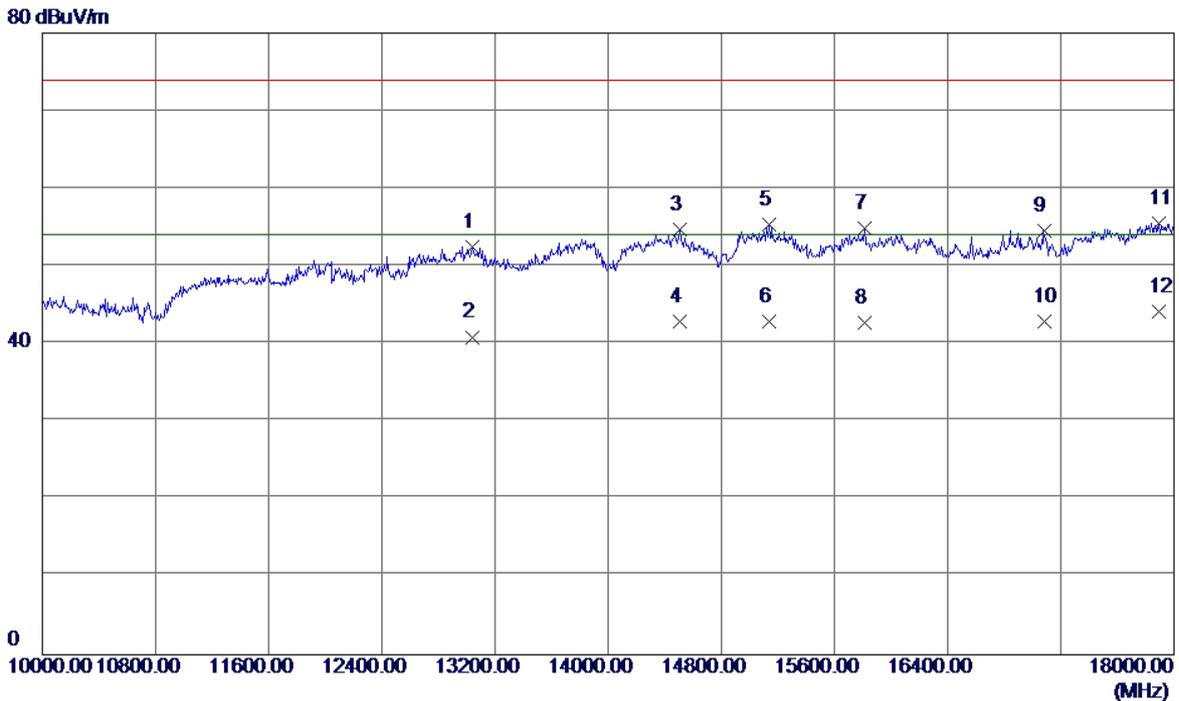

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	13040.0000	28.65	23.87	52.52	74.00	-21.48	Peak
2	13040.0000	17.01	23.87	40.88	54.00	-13.12	AVG
3	14504.0000	28.66	26.00	54.66	74.00	-19.34	Peak
4	14504.0000	16.88	26.00	42.88	54.00	-11.12	AVG
5	15136.0000	30.84	24.47	55.31	74.00	-18.69	Peak
6	15136.0000	18.35	24.47	42.82	54.00	-11.18	AVG
7	15816.0000	32.53	22.41	54.94	74.00	-19.06	Peak
8	15816.0000	20.33	22.41	42.74	54.00	-11.26	AVG
9	17080.0000	30.01	24.60	54.61	74.00	-19.39	Peak
10	17080.0000	18.26	24.60	42.86	54.00	-11.14	AVG
11	17896.0000	28.53	27.04	55.57	74.00	-18.43	Peak
12 *	17896.0000	17.15	27.04	44.19	54.00	-9.81	AVG

EUT	HUAWEI MediaPad T2 7.0 (MediaPad T2 7.0 for short)	Model Name	BGO-L03
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Huntkey/HW-050100E01 (EU)+Battery:SCUD		
Test Engineer	Sam Wang		

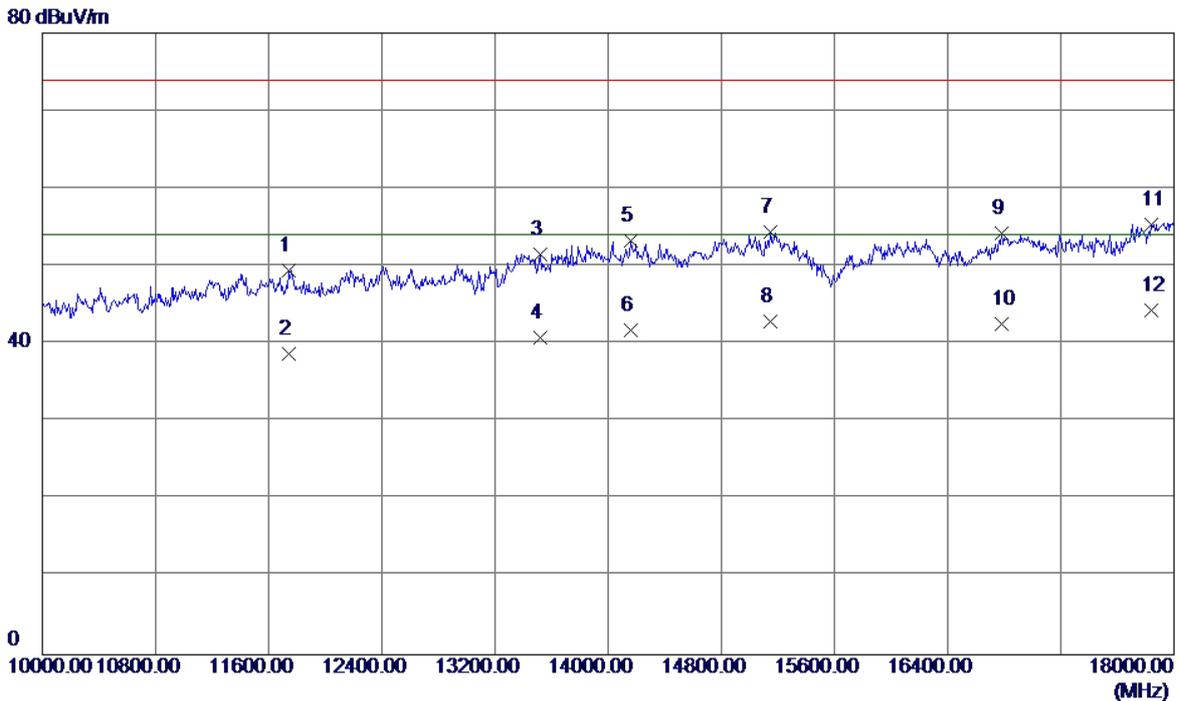

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	11744.0000	28.31	21.20	49.51	74.00	-24.49	Peak
2	11744.0000	17.54	21.20	38.74	54.00	-15.26	AVG
3	13520.0000	27.96	23.55	51.51	74.00	-22.49	Peak
4	13520.0000	17.26	23.55	40.81	54.00	-13.19	AVG
5	14160.0000	27.64	25.70	53.34	74.00	-20.66	Peak
6	14160.0000	16.05	25.70	41.75	54.00	-12.25	AVG
7	15144.0000	30.01	24.44	54.45	74.00	-19.55	Peak
8	15144.0000	18.41	24.44	42.85	54.00	-11.15	AVG
9	16784.0000	30.33	23.88	54.21	74.00	-19.79	Peak
10	16784.0000	18.62	23.88	42.50	54.00	-11.50	AVG
11	17840.0000	28.59	26.82	55.41	74.00	-18.59	Peak
12 *	17840.0000	17.53	26.82	44.35	54.00	-9.65	AVG