


Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter: HUNTKEY)

Horizontal

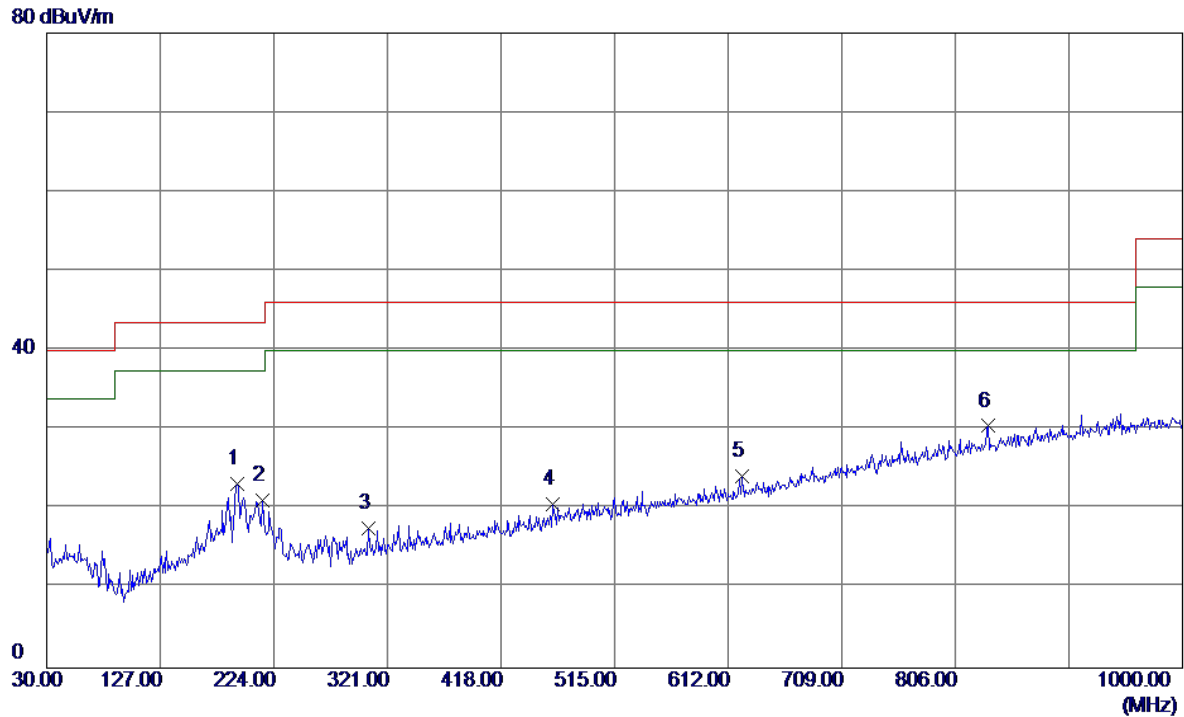


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	192.9600	36.25	-13.11	23.14	43.50	-20.36	Peak	
2	214.3000	35.04	-13.95	21.09	43.50	-22.41	Peak	
3	304.5100	30.39	-12.75	17.64	46.00	-28.36	Peak	
4	462.6200	30.21	-9.63	20.58	46.00	-25.42	Peak	
5	623.6400	30.18	-5.97	24.21	46.00	-21.79	Peak	
6 *	834.1300	30.91	-0.43	30.48	46.00	-15.52	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: HUNTKEY)

Vertical

80 dBuV/m

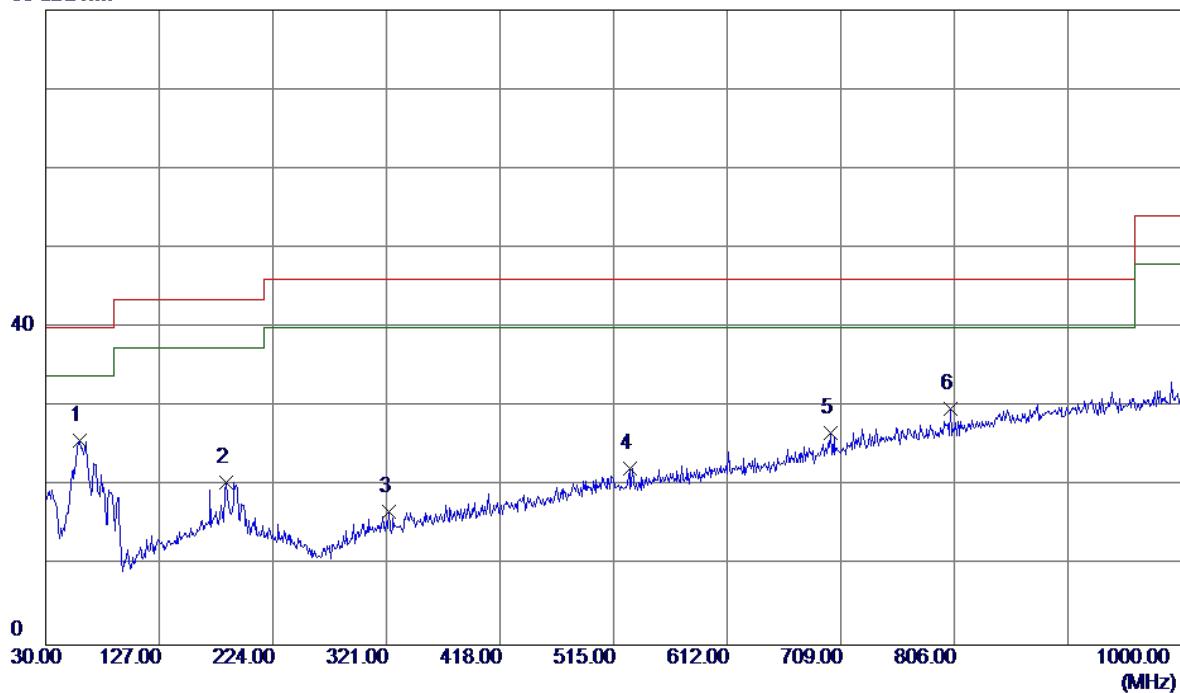


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	39.92	-14.22	25.70	40.00	-14.30	Peak	
2	184.2300	32.83	-12.38	20.45	43.50	-23.05	Peak	
3	322.9400	29.24	-12.43	16.81	46.00	-29.19	Peak	
4	528.5800	30.41	-8.15	22.26	46.00	-23.74	Peak	
5	700.2700	30.64	-3.93	26.71	46.00	-19.29	Peak	
6	803.0900	30.99	-1.28	29.71	46.00	-16.29	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter: HUNTKEY)

Horizontal


80 dBuV/m

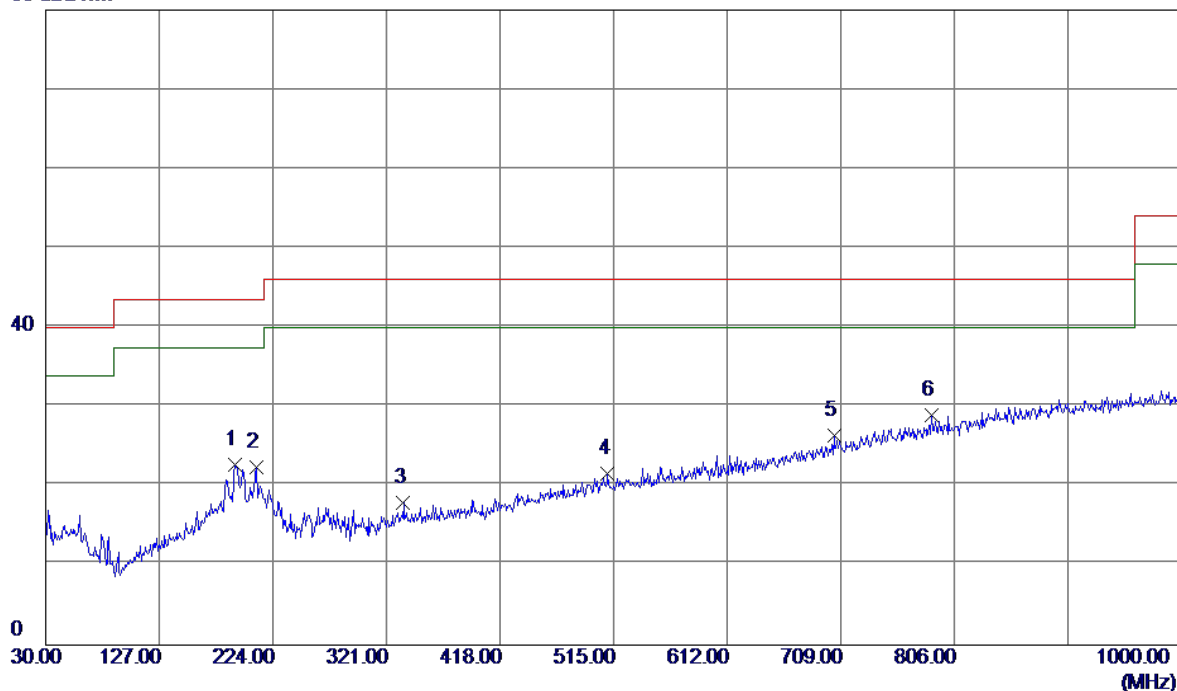

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	191.9900	35.73	-13.03	22.70	43.50	-20.80	Peak	
2	210.4200	36.35	-13.97	22.38	43.50	-21.12	Peak	
3	335.5500	30.13	-12.21	17.92	46.00	-28.08	Peak	
4	510.1500	30.19	-8.52	21.67	46.00	-24.33	Peak	
5	703.1800	30.21	-3.85	26.36	46.00	-19.64	Peak	
6 *	786.6000	30.68	-1.65	29.03	46.00	-16.97	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: HUNTKEY)


Vertical

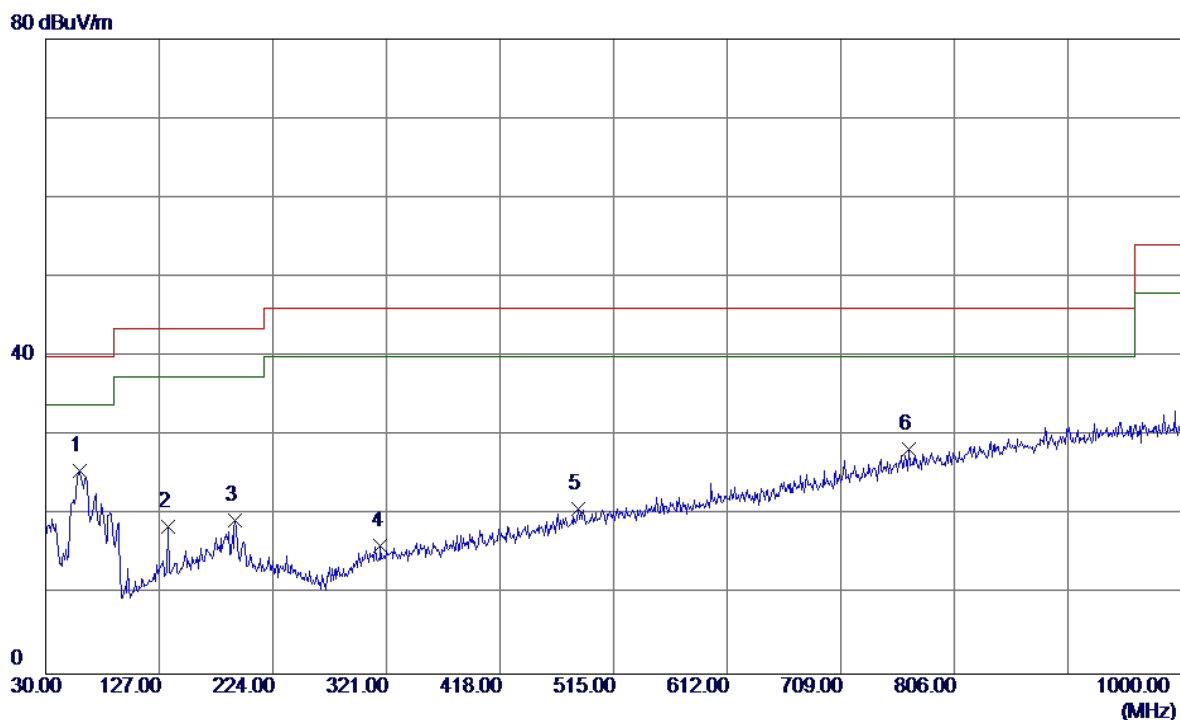

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	39.76	-14.22	25.54	40.00	-14.46	Peak	
2	134.7600	32.96	-14.47	18.49	43.50	-25.01	Peak	
3	191.9900	32.35	-13.03	19.32	43.50	-24.18	Peak	
4	316.1500	28.75	-12.55	16.20	46.00	-29.80	Peak	
5	484.9300	29.97	-9.09	20.88	46.00	-25.12	Peak	
6	767.2000	30.44	-2.07	28.37	46.00	-17.63	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: HUNTKEY)


Horizontal

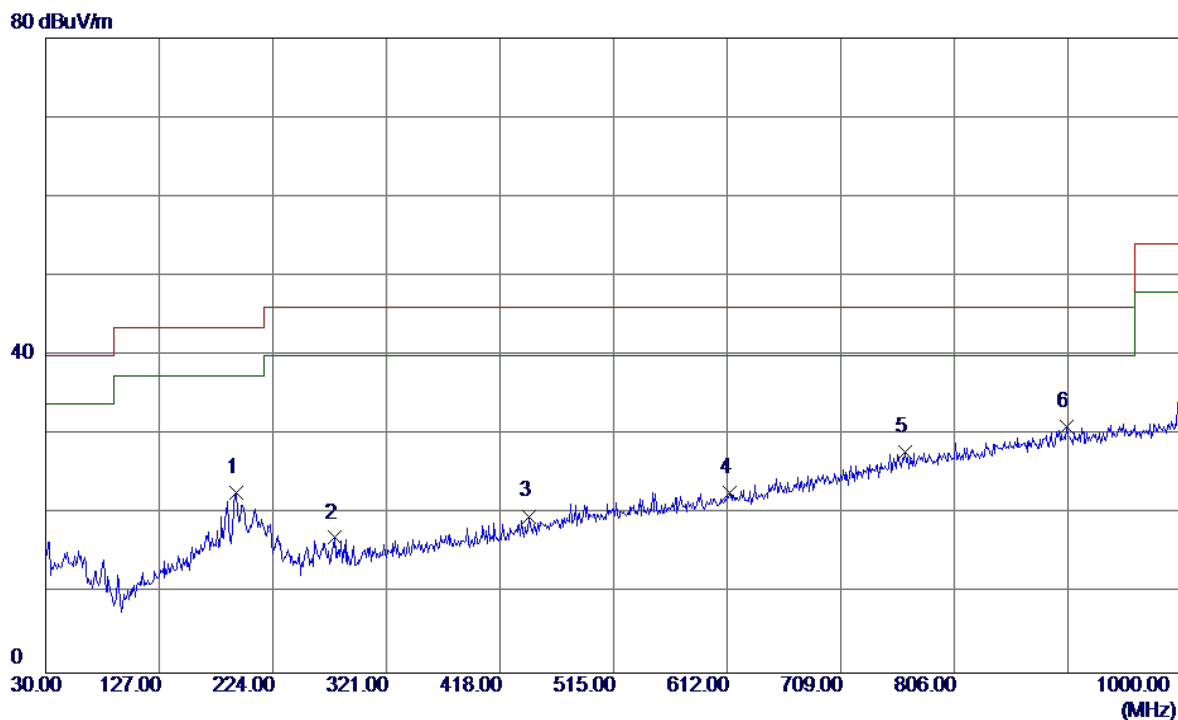

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	192.9600	35.90	-13.11	22.79	43.50	-20.71	Peak	
2	276.3800	32.20	-15.16	17.04	46.00	-28.96	Peak	
3	443.2200	29.89	-10.13	19.76	46.00	-26.24	Peak	
4	613.9400	28.84	-6.16	22.68	46.00	-23.32	Peak	
5	764.2900	29.95	-2.13	27.82	46.00	-18.18	Peak	
6 *	902.0300	30.02	1.07	31.09	46.00	-14.91	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz(Adapter: HUNTKEY)


Vertical

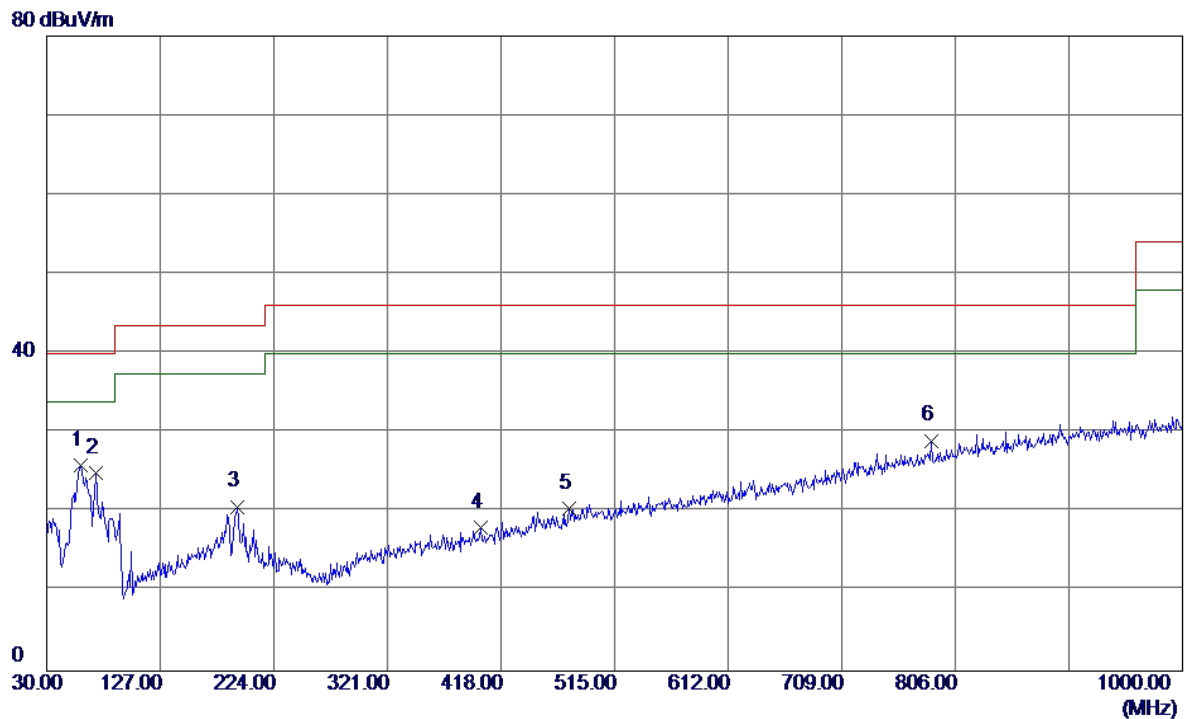

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	59.1000	40.09	-14.22	25.87	40.00	-14.13	Peak	
2	71.7100	41.60	-16.71	24.89	40.00	-15.11	Peak	
3	192.9600	33.83	-13.11	20.72	43.50	-22.78	Peak	
4	400.5400	29.47	-11.34	18.13	46.00	-27.87	Peak	
5	476.2000	29.72	-9.30	20.42	46.00	-25.58	Peak	
6	785.6300	30.71	-1.67	29.04	46.00	-16.96	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: HUNTKEY)


Horizontal

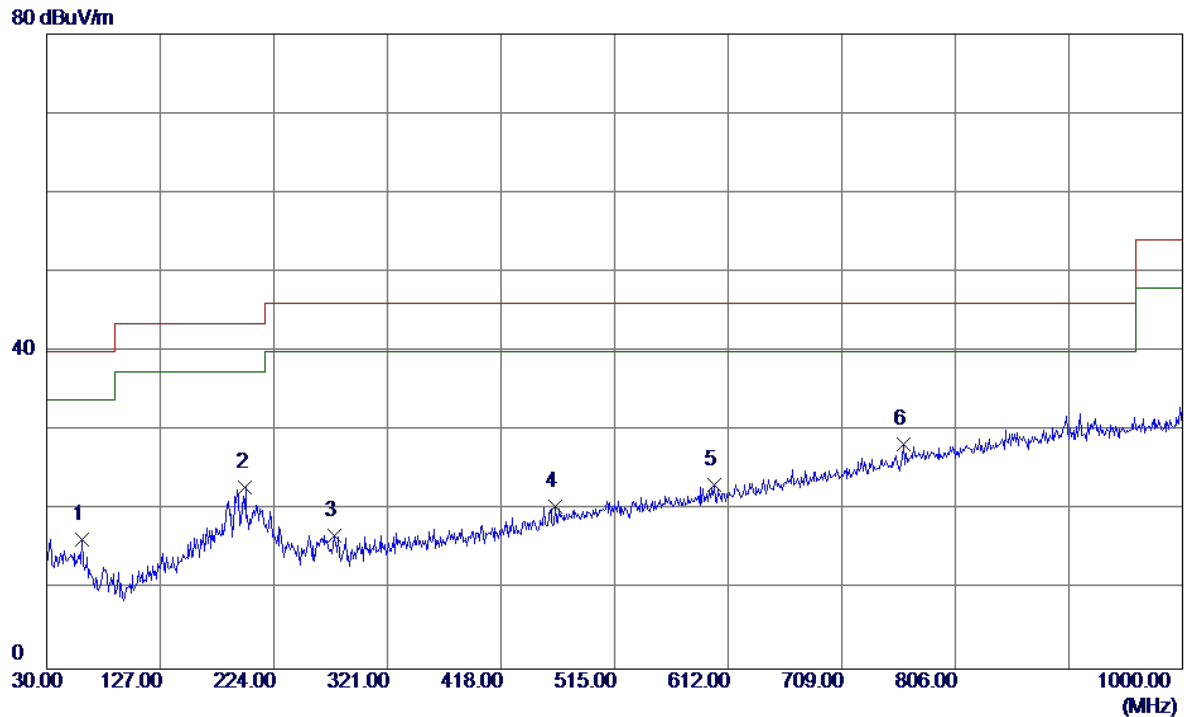

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	60.0700	30.65	-14.32	16.33	40.00	-23.67	Peak	
2	199.7500	36.62	-13.73	22.89	43.50	-20.61	Peak	
3	275.4100	32.11	-15.26	16.85	46.00	-29.15	Peak	
4	464.5600	30.11	-9.58	20.53	46.00	-25.47	Peak	
5	600.3600	29.56	-6.41	23.15	46.00	-22.85	Peak	
6 *	761.3800	30.50	-2.20	28.30	46.00	-17.70	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz(Adapter: Salcomp)


Vertical

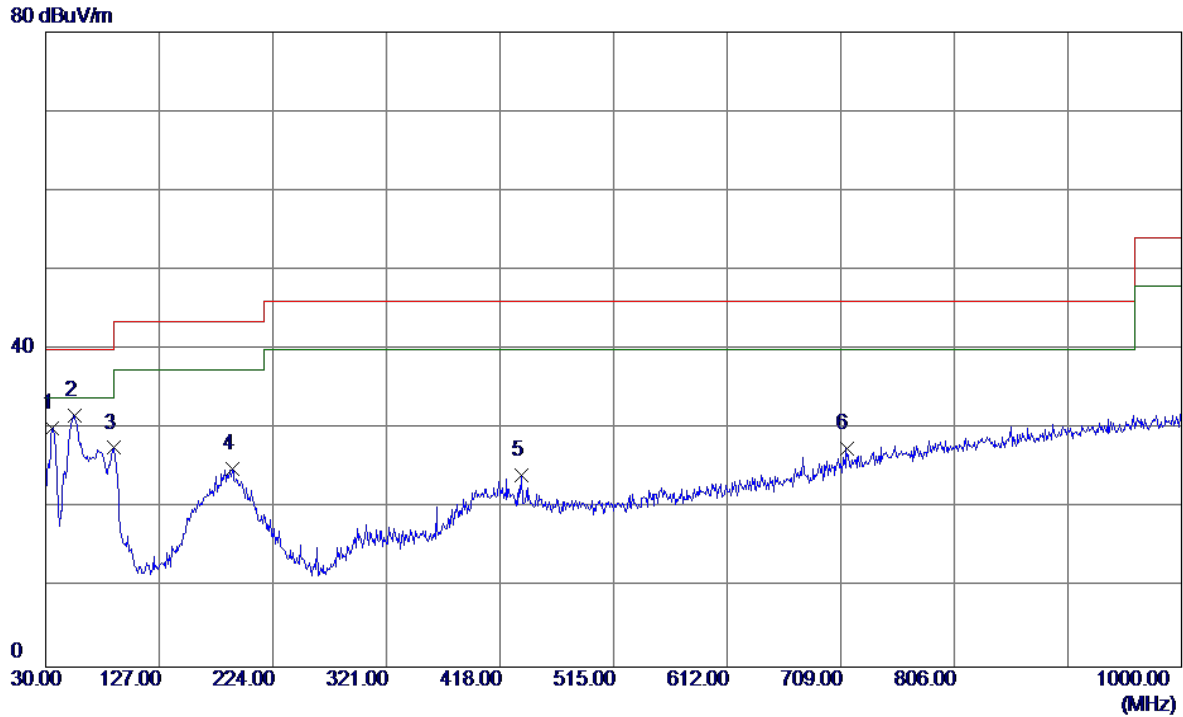

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	44.58	-14.51	30.07	40.00	-9.93	Peak	
2 *	55.2200	45.62	-13.94	31.68	40.00	-8.32	Peak	
3	88.2000	46.16	-18.56	27.60	43.50	-15.90	Peak	
4	189.0800	37.72	-12.77	24.95	43.50	-18.55	Peak	
5	436.4300	34.43	-10.33	24.10	46.00	-21.90	Peak	
6	713.8500	31.10	-3.53	27.57	46.00	-18.43	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: Salcomp)


Horizontal

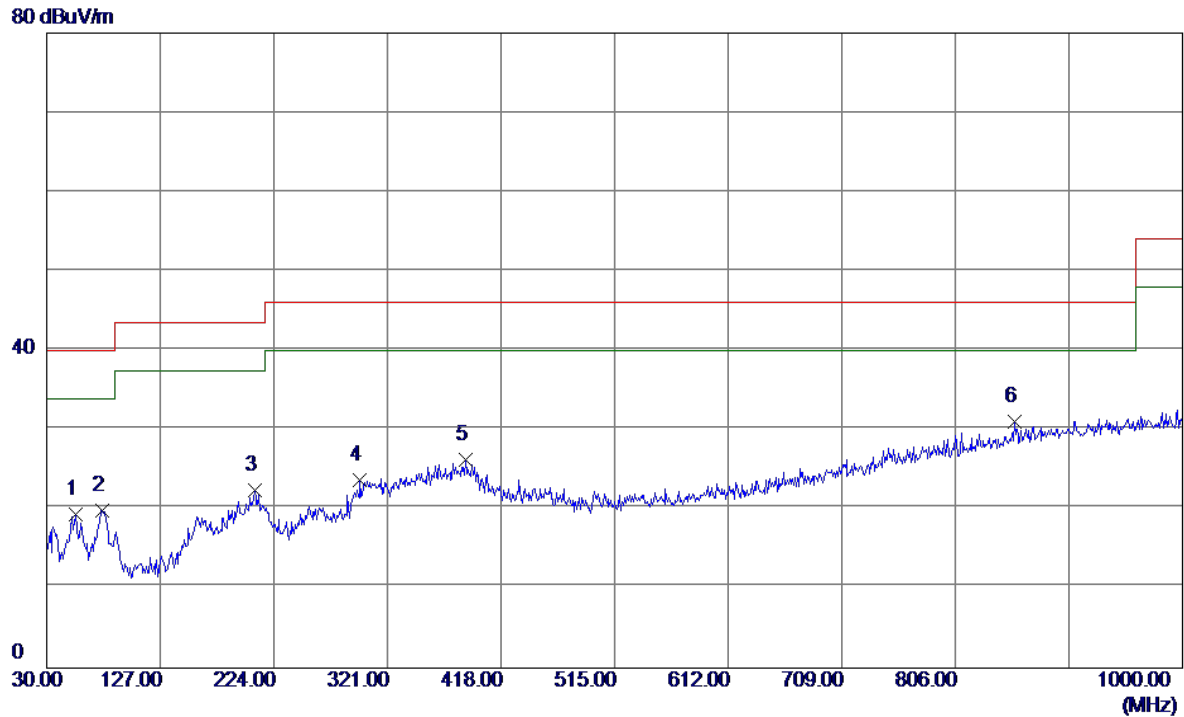

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	55.2200	33.28	-13.94	19.34	40.00	-20.66	Peak	
2	77.5300	37.58	-17.67	19.91	40.00	-20.09	Peak	
3	207.5100	36.31	-13.92	22.39	43.50	-21.11	Peak	
4	297.7200	36.75	-13.14	23.61	46.00	-22.39	Peak	
5	387.9300	37.68	-11.50	26.18	46.00	-19.82	Peak	
6 *	856.4400	30.85	0.13	30.98	46.00	-15.02	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: Salcomp)


Vertical

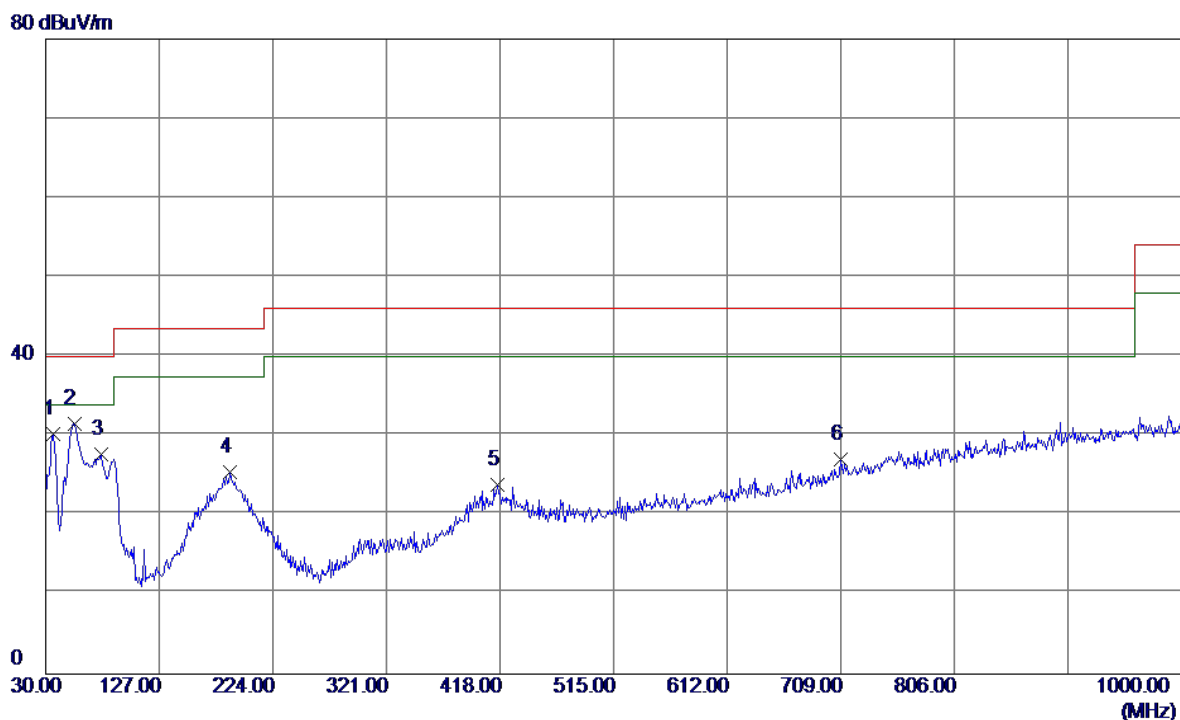

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	36.7900	44.59	-14.41	30.18	40.00	-9.82	Peak	
2 *	54.2500	45.47	-13.95	31.52	40.00	-8.48	Peak	
3	77.5300	45.41	-17.67	27.74	40.00	-12.26	Peak	
4	187.1400	38.08	-12.61	25.47	43.50	-18.03	Peak	
5	416.0600	34.72	-10.90	23.82	46.00	-22.18	Peak	
6	709.0000	30.77	-3.67	27.10	46.00	-18.90	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz(Adapter: Salcomp)


Horizontal

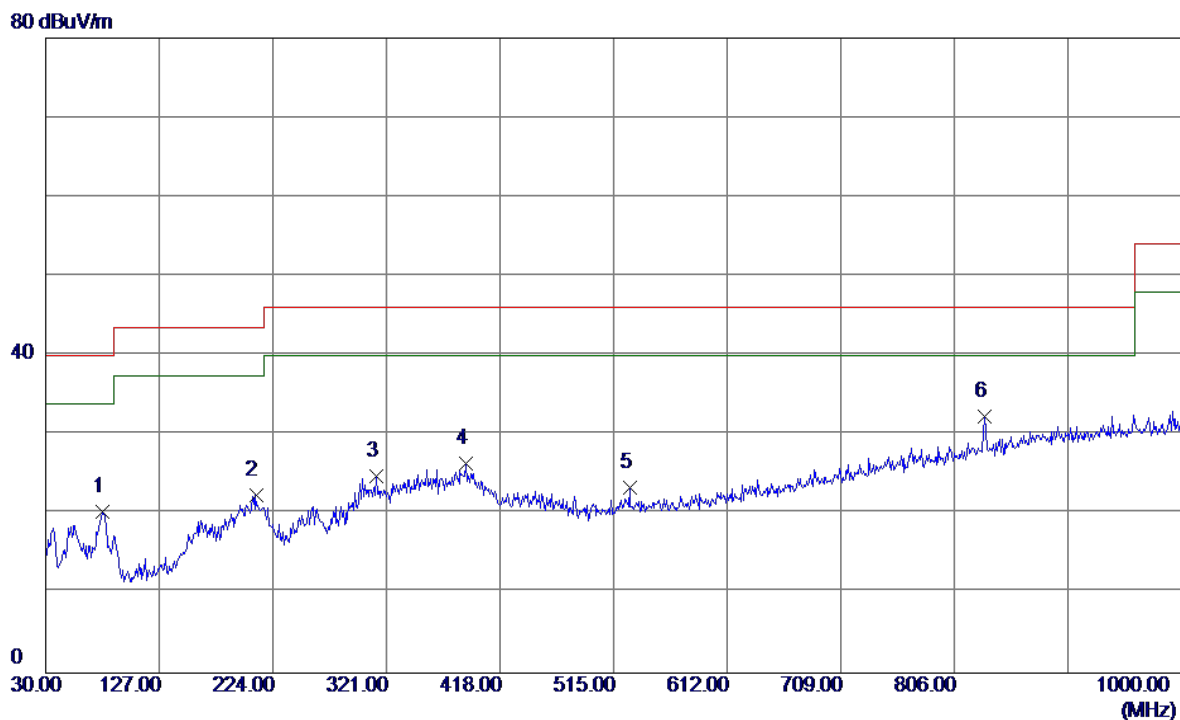

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	78.5000	38.22	-17.89	20.33	40.00	-19.67	Peak	
2	209.4500	36.31	-13.96	22.35	43.50	-21.15	Peak	
3	312.2700	37.46	-12.62	24.84	46.00	-21.16	Peak	
4	388.9000	37.93	-11.49	26.44	46.00	-19.56	Peak	
5	528.5800	31.44	-8.15	23.29	46.00	-22.71	Peak	
6 *	832.1900	32.81	-0.48	32.33	46.00	-13.67	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: Salcomp)


Vertical

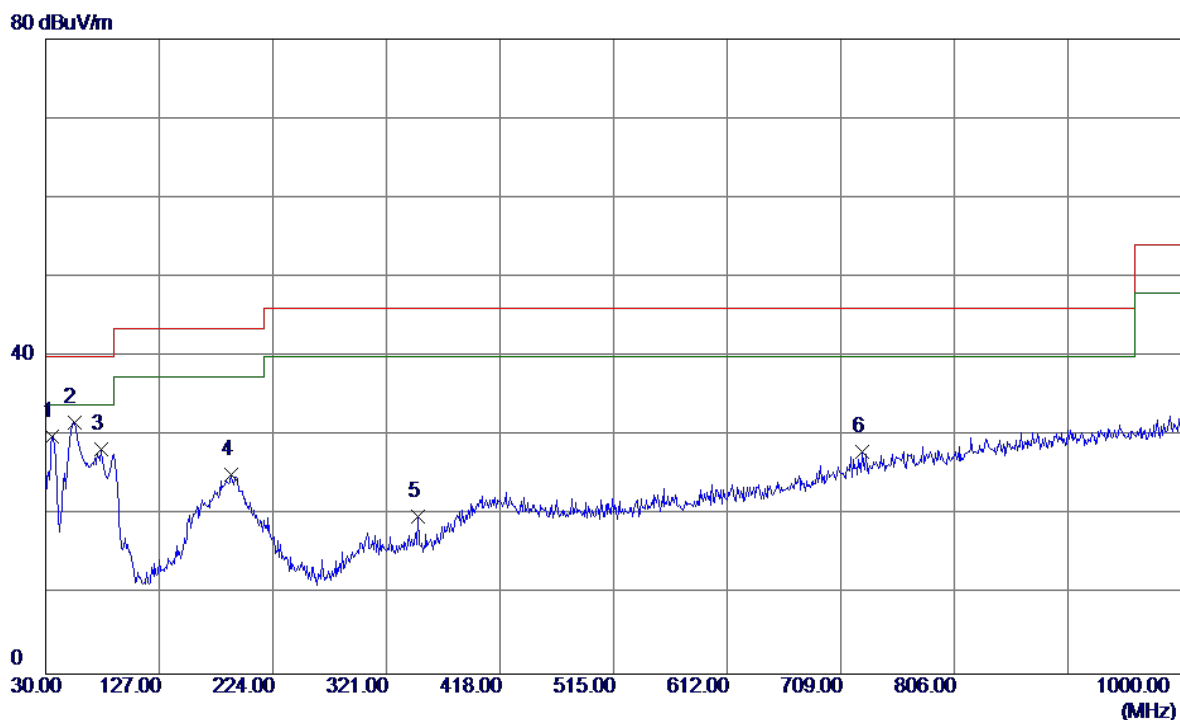

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	44.50	-14.51	29.99	40.00	-10.01	Peak	
2 *	54.2500	45.58	-13.95	31.63	40.00	-8.37	Peak	
3	77.5300	46.00	-17.67	28.33	40.00	-11.67	Peak	
4	188.1100	37.84	-12.69	25.15	43.50	-18.35	Peak	
5	348.1600	31.90	-11.99	19.91	46.00	-26.09	Peak	
6	727.4300	31.17	-3.12	28.05	46.00	-17.95	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz(Adapter: Salcomp)


Horizontal

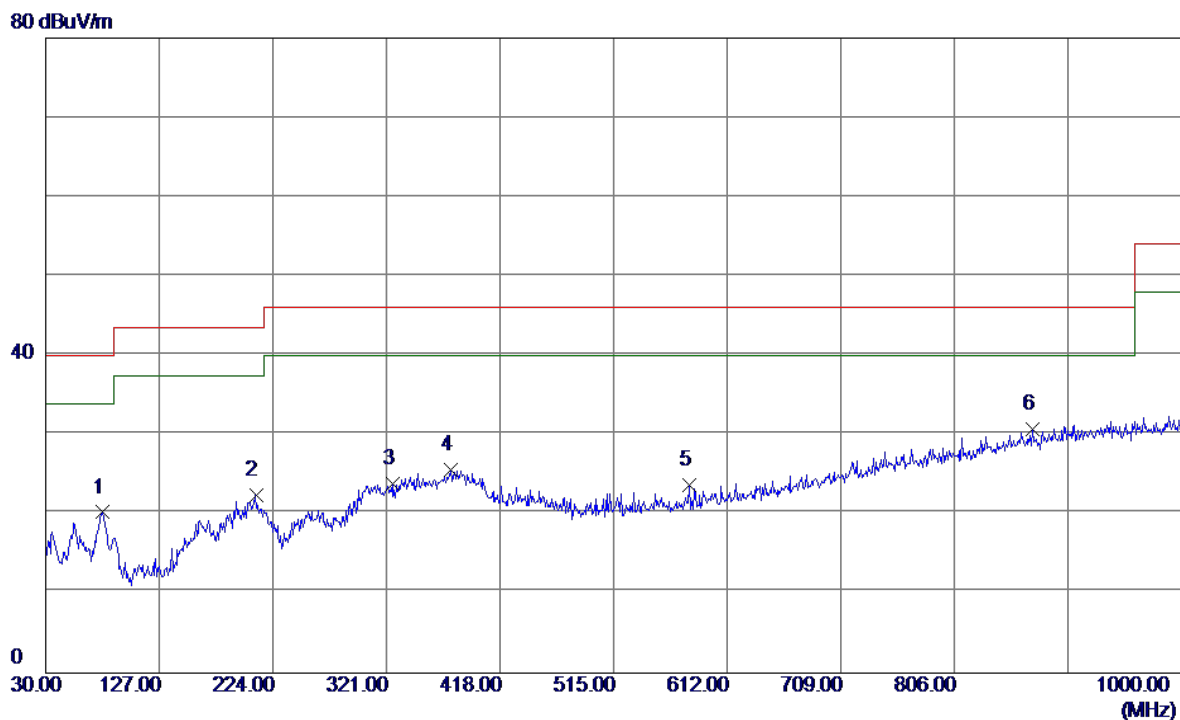

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	78.5000	38.13	-17.89	20.24	40.00	-19.76	Peak	
2	209.4500	36.37	-13.96	22.41	43.50	-21.09	Peak	
3	326.8200	36.18	-12.36	23.82	46.00	-22.18	Peak	
4	376.2900	37.24	-11.64	25.60	46.00	-20.40	Peak	
5	579.9900	30.66	-6.94	23.72	46.00	-22.28	Peak	
6 *	872.9300	30.19	0.47	30.66	46.00	-15.34	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter: Salcomp)


Vertical

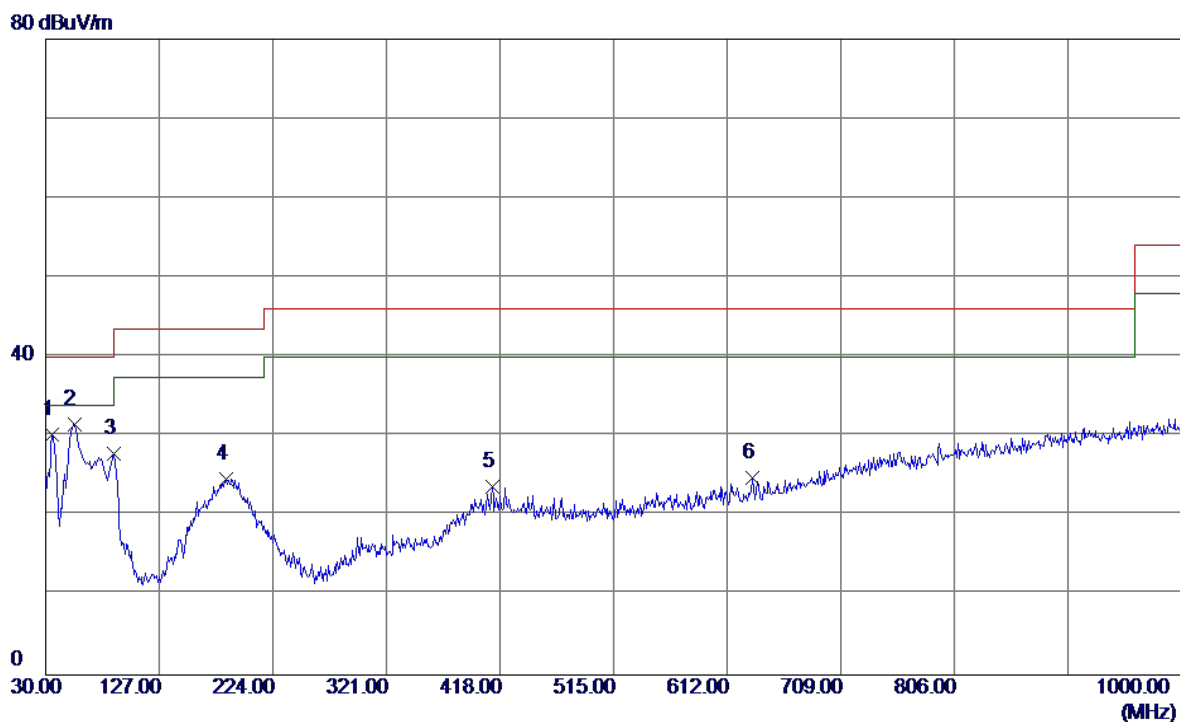

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	44.79	-14.51	30.28	40.00	-9.72	Peak	
2 *	54.2500	45.45	-13.95	31.50	40.00	-8.50	Peak	
3	88.2000	46.42	-18.56	27.86	43.50	-15.64	Peak	
4	184.2300	37.04	-12.38	24.66	43.50	-18.84	Peak	
5	411.2100	34.67	-11.04	23.63	46.00	-22.37	Peak	
6	633.3400	30.60	-5.79	24.81	46.00	-21.19	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz(Adapter: Salcomp)


Horizontal

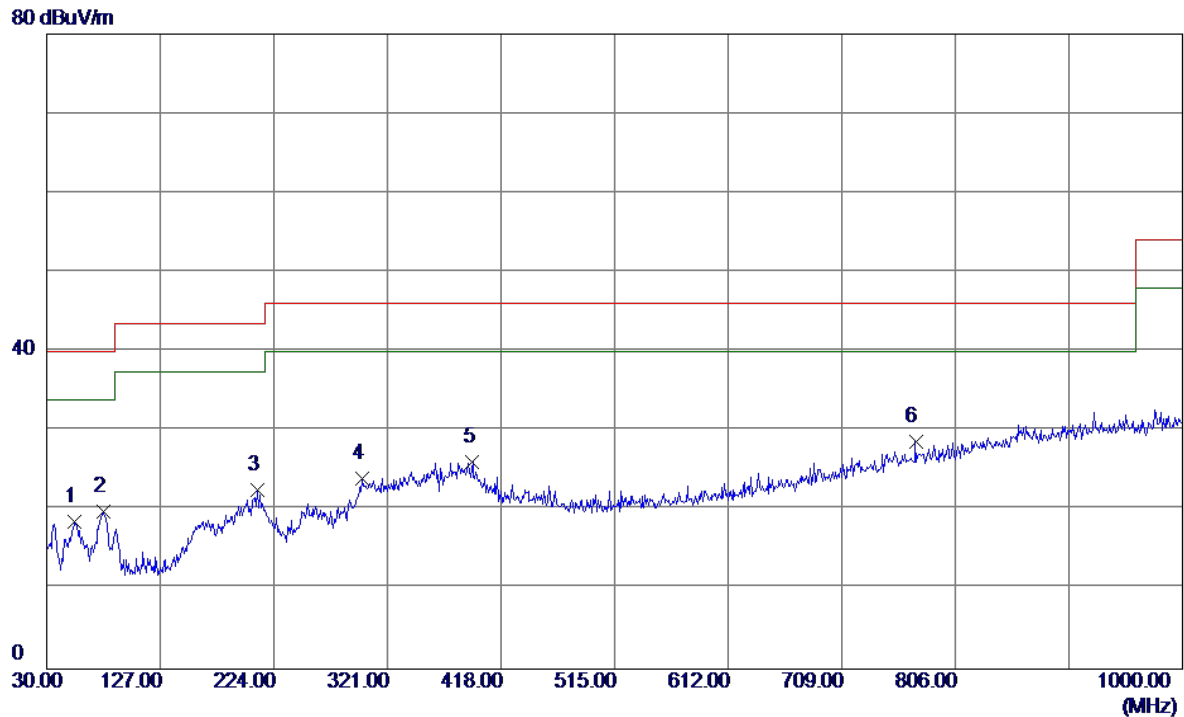

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	53.2800	32.47	-13.88	18.59	40.00	-21.41	Peak	
2	78.5000	37.67	-17.89	19.78	40.00	-20.22	Peak	
3	210.4200	36.48	-13.97	22.51	43.50	-20.99	Peak	
4	299.6600	36.81	-12.88	23.93	46.00	-22.07	Peak	
5	393.7500	37.52	-11.43	26.09	46.00	-19.91	Peak	
6 *	772.0500	30.57	-1.97	28.60	46.00	-17.40	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: Salcomp)


Vertical

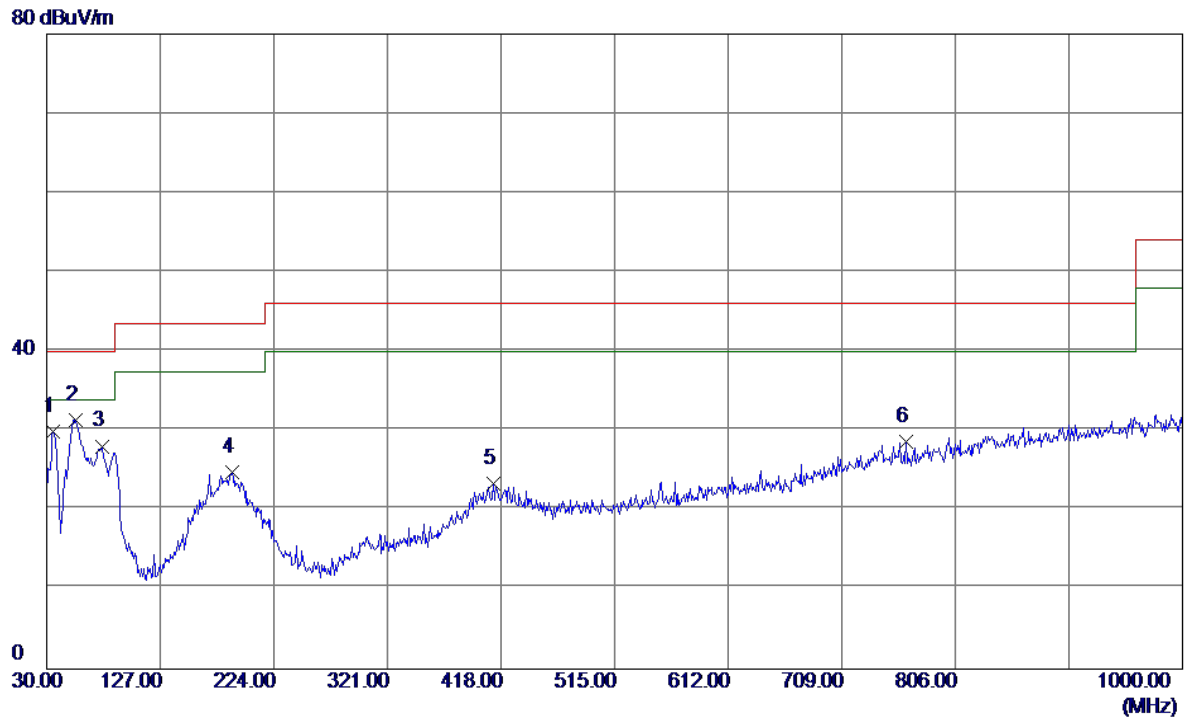

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	44.47	-14.51	29.96	40.00	-10.04	Peak	
2 *	55.2200	45.37	-13.94	31.43	40.00	-8.57	Peak	
3	77.5300	45.75	-17.67	28.08	40.00	-11.92	Peak	
4	188.1100	37.43	-12.69	24.74	43.50	-18.76	Peak	
5	411.2100	34.38	-11.04	23.34	46.00	-22.66	Peak	
6	764.2900	30.77	-2.13	28.64	46.00	-17.36	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz(Adapter: Salcomp)


Horizontal

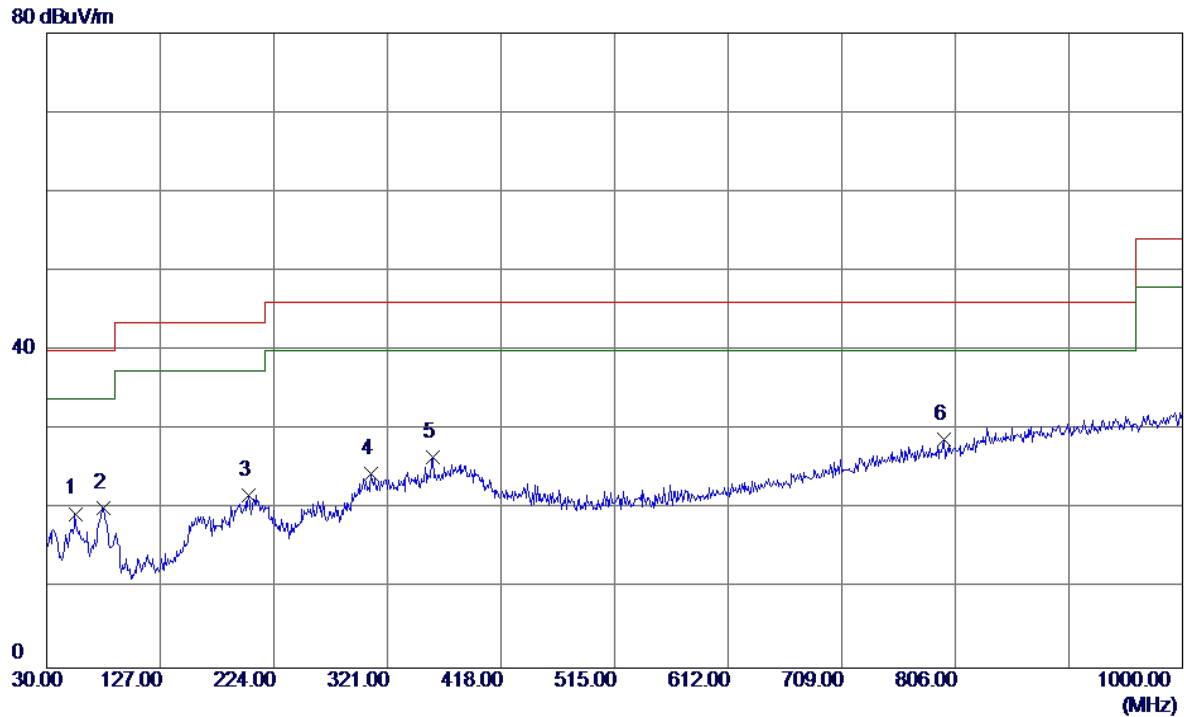

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	54.2500	33.39	-13.95	19.44	40.00	-20.56	Peak	
2	78.5000	38.09	-17.89	20.20	40.00	-19.80	Peak	
3	202.6600	35.59	-13.81	21.78	43.50	-21.72	Peak	
4	307.4200	37.25	-12.70	24.55	46.00	-21.45	Peak	
5	359.8000	38.37	-11.84	26.53	46.00	-19.47	Peak	
6 *	796.3000	30.31	-1.44	28.87	46.00	-17.13	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz(Adapter: Salcomp)


Vertical

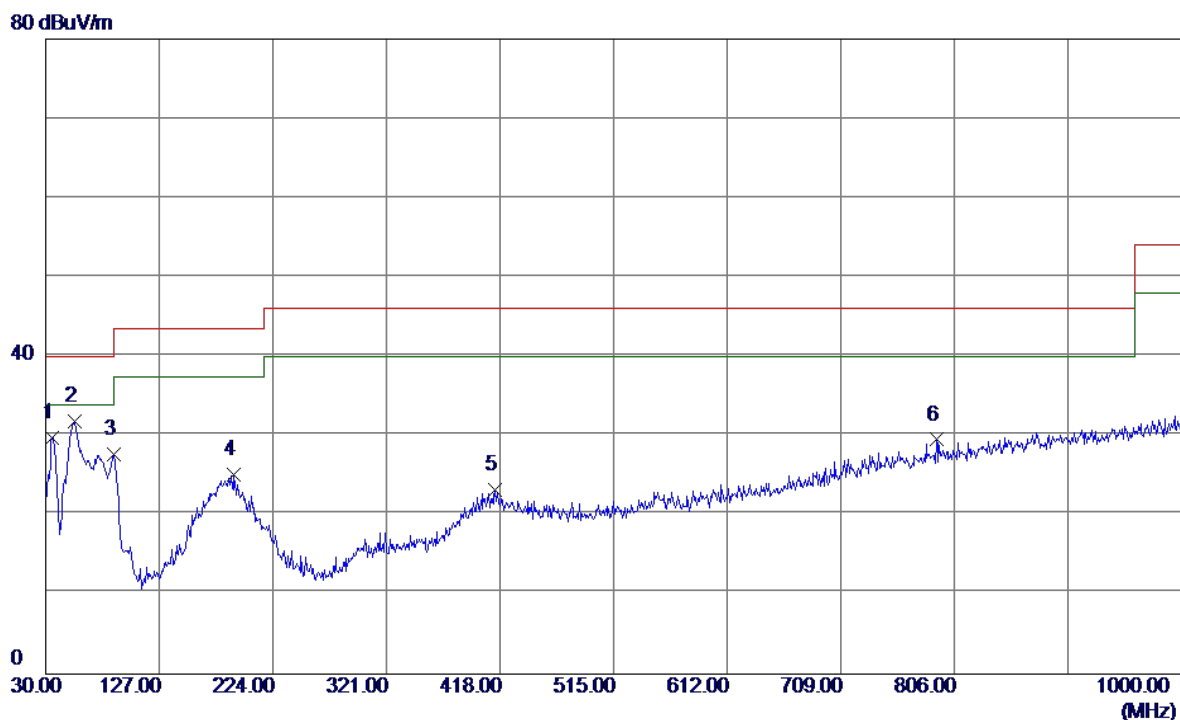

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	44.34	-14.51	29.83	40.00	-10.17	Peak	
2 *	55.2200	45.76	-13.94	31.82	40.00	-8.18	Peak	
3	88.2000	46.25	-18.56	27.69	43.50	-15.81	Peak	
4	190.0500	37.97	-12.85	25.12	43.50	-18.38	Peak	
5	414.1200	34.15	-10.96	23.19	46.00	-22.81	Peak	
6	790.4800	31.09	-1.57	29.52	46.00	-16.48	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter: Salcomp)


Horizontal

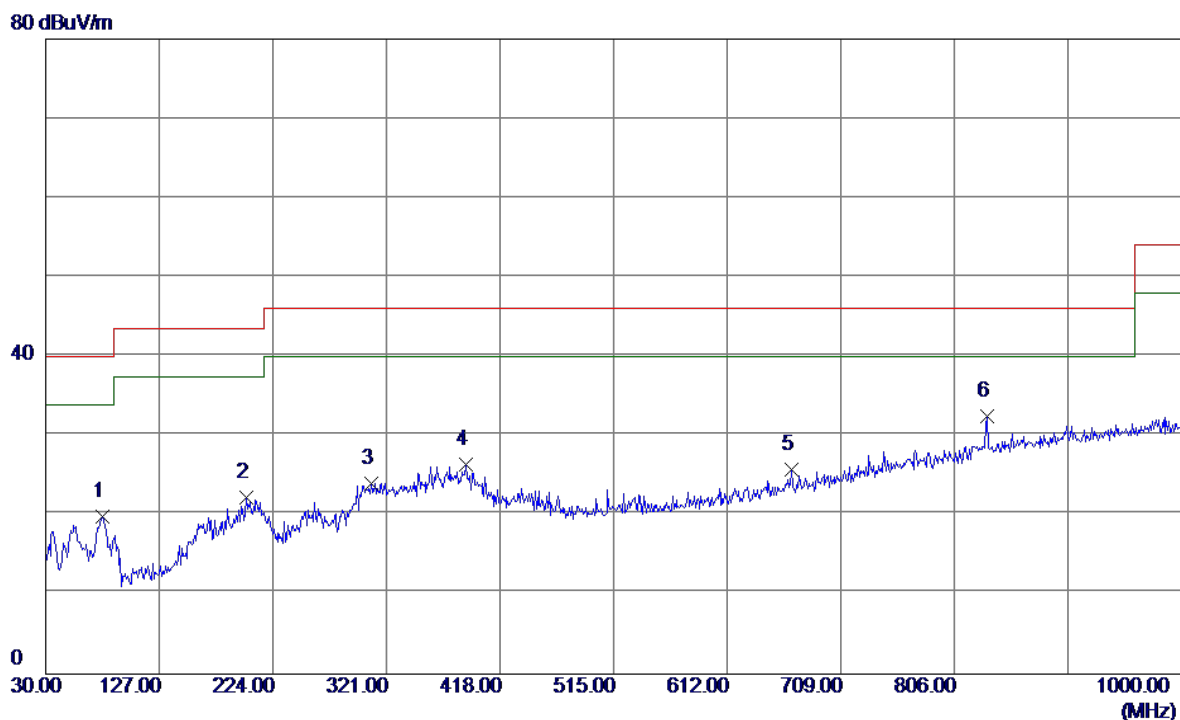

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	78.5000	37.77	-17.89	19.88	40.00	-20.12	Peak	
2	201.6900	36.07	-13.79	22.28	43.50	-21.22	Peak	
3	308.3900	36.70	-12.68	24.02	46.00	-21.98	Peak	
4	388.9000	37.94	-11.49	26.45	46.00	-19.55	Peak	
5	667.2900	30.77	-4.94	25.83	46.00	-20.17	Peak	
6 *	834.1300	32.84	-0.43	32.41	46.00	-13.59	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: Salcomp)


Vertical

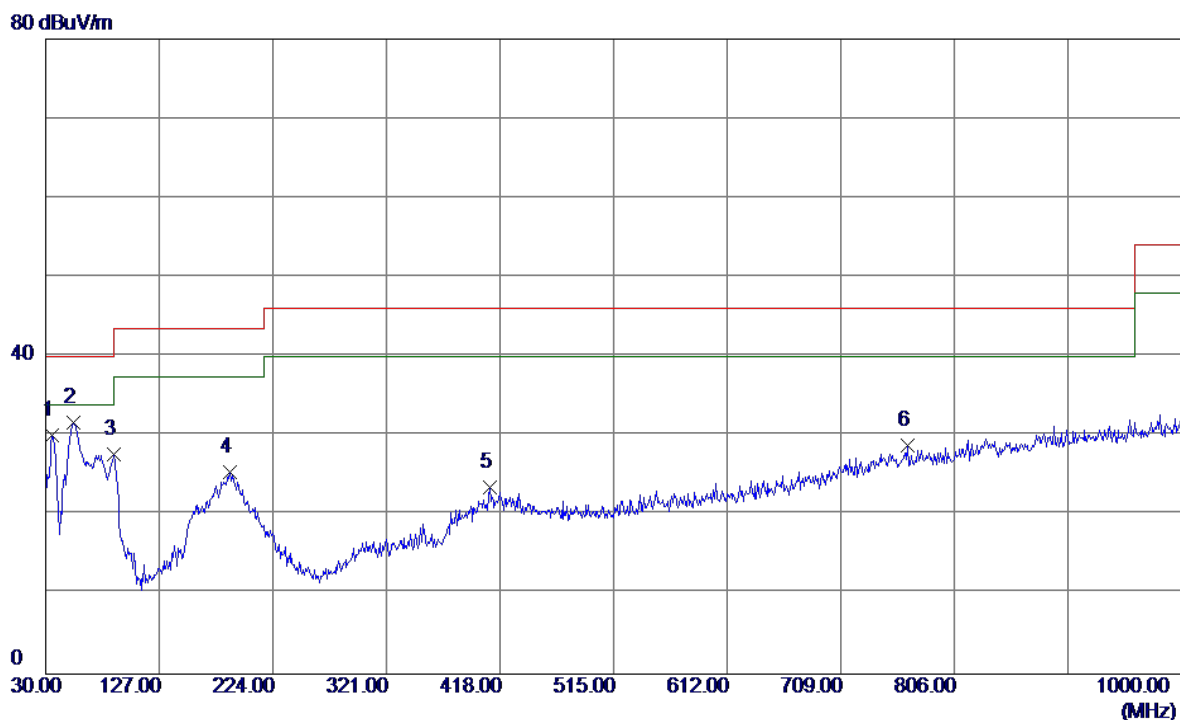

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	44.55	-14.51	30.04	40.00	-9.96	Peak	
2 *	53.2800	45.57	-13.88	31.69	40.00	-8.31	Peak	
3	88.2000	46.19	-18.56	27.63	43.50	-15.87	Peak	
4	187.1400	38.04	-12.61	25.43	43.50	-18.07	Peak	
5	409.2700	34.59	-11.10	23.49	46.00	-22.51	Peak	
6	766.2300	30.88	-2.09	28.79	46.00	-17.21	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz(Adapter: Salcomp)


Horizontal

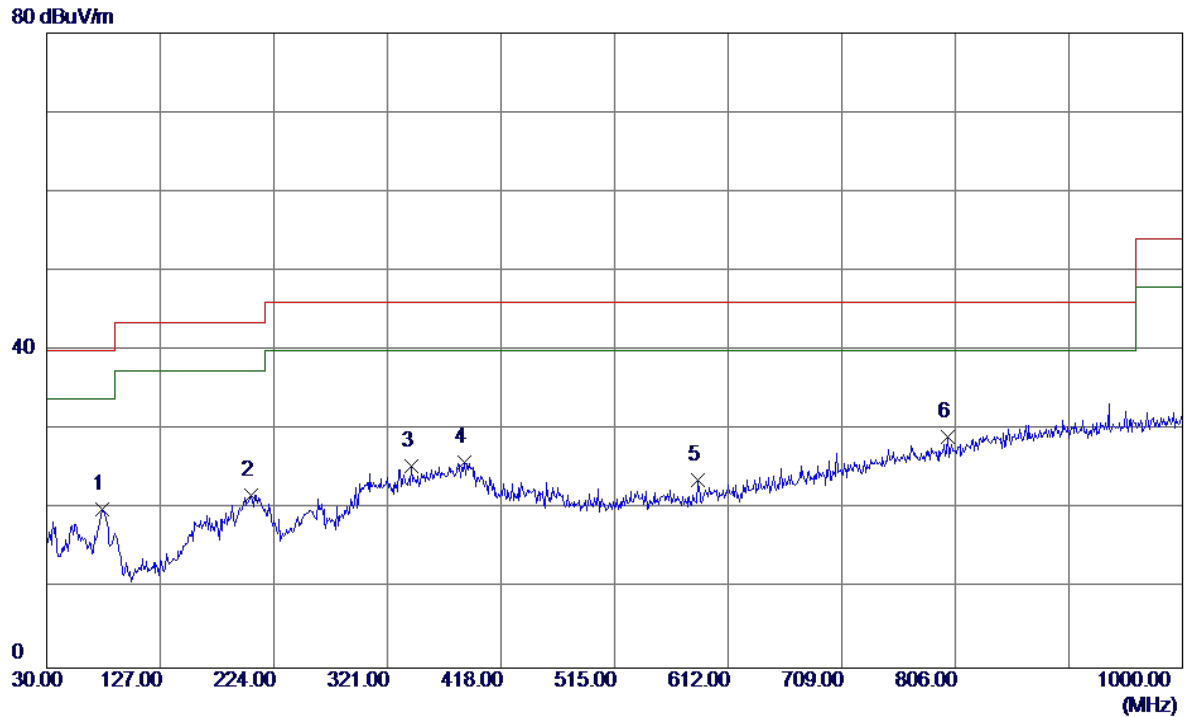

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	77.5300	37.61	-17.67	19.94	40.00	-20.06	Peak	
2	204.6000	35.59	-13.85	21.74	43.50	-21.76	Peak	
3	341.3700	37.56	-12.11	25.45	46.00	-20.55	Peak	
4	386.9600	37.37	-11.52	25.85	46.00	-20.15	Peak	
5	585.8100	30.52	-6.79	23.73	46.00	-22.27	Peak	
6 *	799.2100	30.55	-1.38	29.17	46.00	-16.83	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: Salcomp)


Vertical

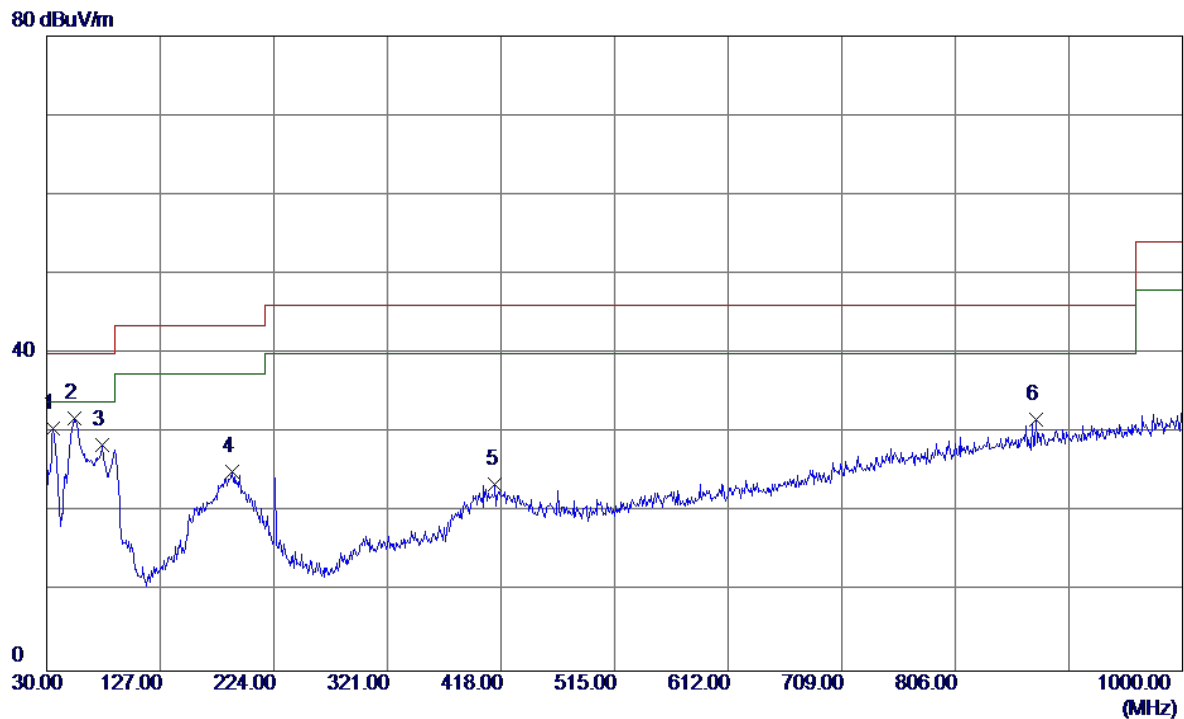

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	35.8200	45.02	-14.51	30.51	40.00	-9.49	Peak	
2 *	53.2800	45.71	-13.88	31.83	40.00	-8.17	Peak	
3	77.5300	46.22	-17.67	28.55	40.00	-11.45	Peak	
4	188.1100	37.78	-12.69	25.09	43.50	-18.41	Peak	
5	413.1500	34.44	-10.99	23.45	46.00	-22.55	Peak	
6	874.8700	31.14	0.51	31.65	46.00	-14.35	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: Salcomp)


Horizontal

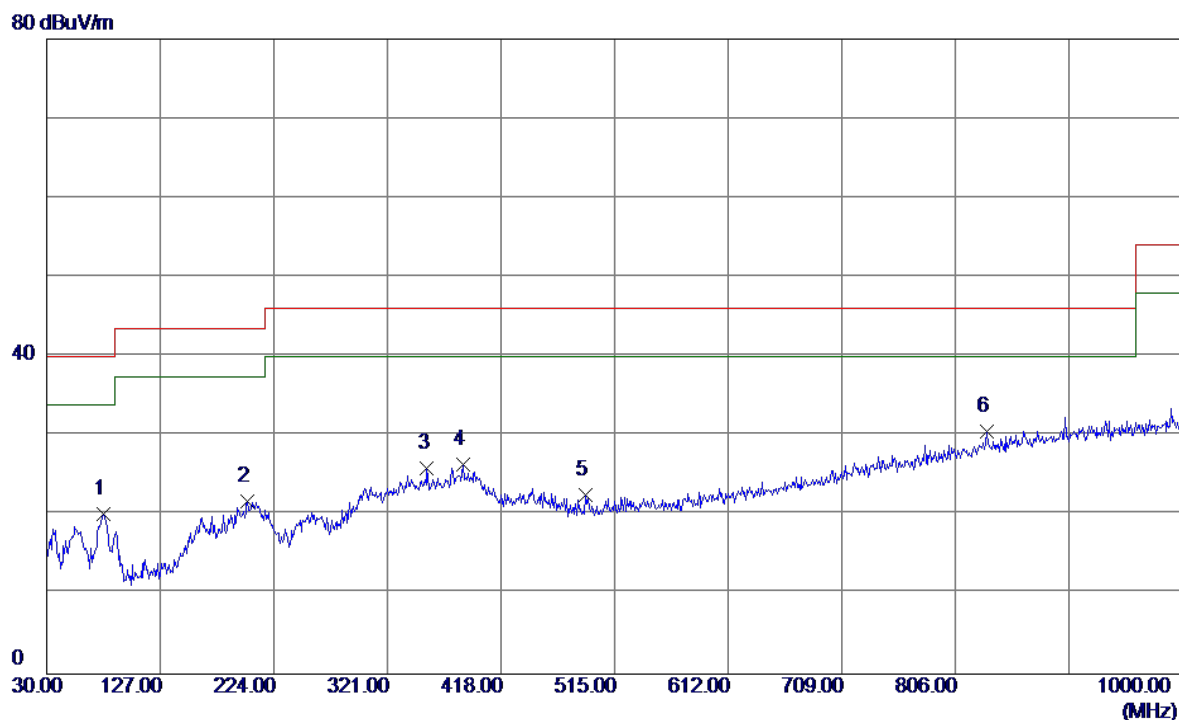

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	78.5000	37.99	-17.89	20.10	40.00	-19.90	Peak	
2	201.6900	35.53	-13.79	21.74	43.50	-21.76	Peak	
3	354.9500	37.78	-11.90	25.88	46.00	-20.12	Peak	
4	385.9900	37.94	-11.53	26.41	46.00	-19.59	Peak	
5	489.7800	31.58	-8.97	22.61	46.00	-23.39	Peak	
6 *	833.1599	31.07	-0.46	30.61	46.00	-15.39	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: PHITEK)


Vertical

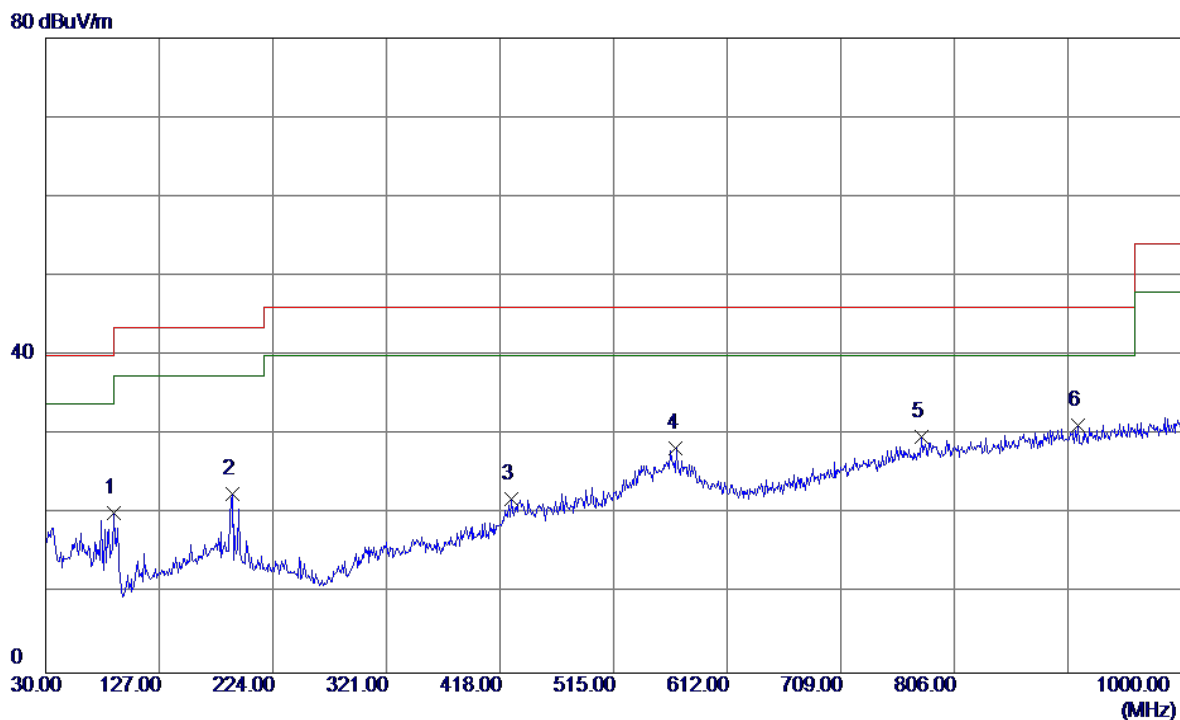

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	88.2000	38.74	-18.56	20.18	43.50	-23.32	Peak	
2	189.0800	35.26	-12.77	22.49	43.50	-21.01	Peak	
3	427.7000	32.53	-10.57	21.96	46.00	-24.04	Peak	
4	568.3500	35.52	-7.24	28.28	46.00	-17.72	Peak	
5	777.8700	31.56	-1.84	29.72	46.00	-16.28	Peak	
6 *	911.7300	29.97	1.26	31.23	46.00	-14.77	Peak	

Test Mode: UNII-1/TX A Mode 5180MHz (Adapter: PHITEK)


Horizontal

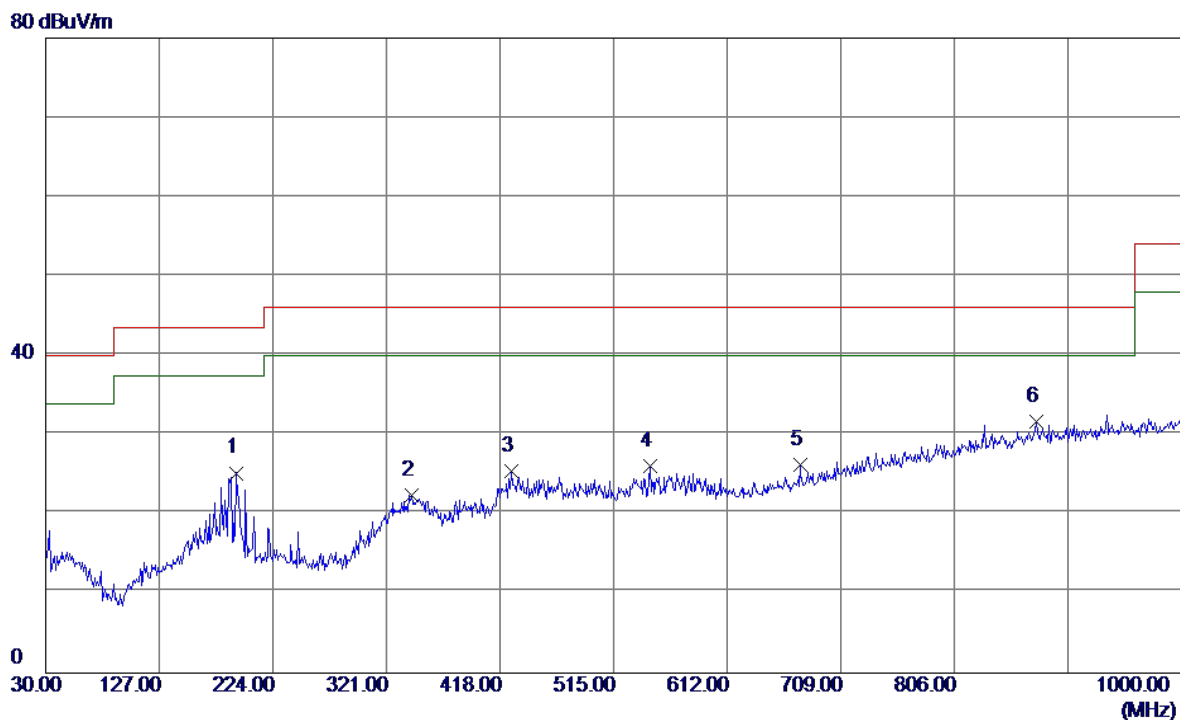

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	192.9600	38.31	-13.11	25.20	43.50	-18.30	Peak	
2	342.3400	34.56	-12.09	22.47	46.00	-23.53	Peak	
3	427.7000	36.04	-10.57	25.47	46.00	-20.53	Peak	
4	546.0400	33.93	-7.79	26.14	46.00	-19.86	Peak	
5	674.0800	31.05	-4.74	26.31	46.00	-19.69	Peak	
6 *	875.8400	31.17	0.53	31.70	46.00	-14.30	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter: PHITEK)


Vertical

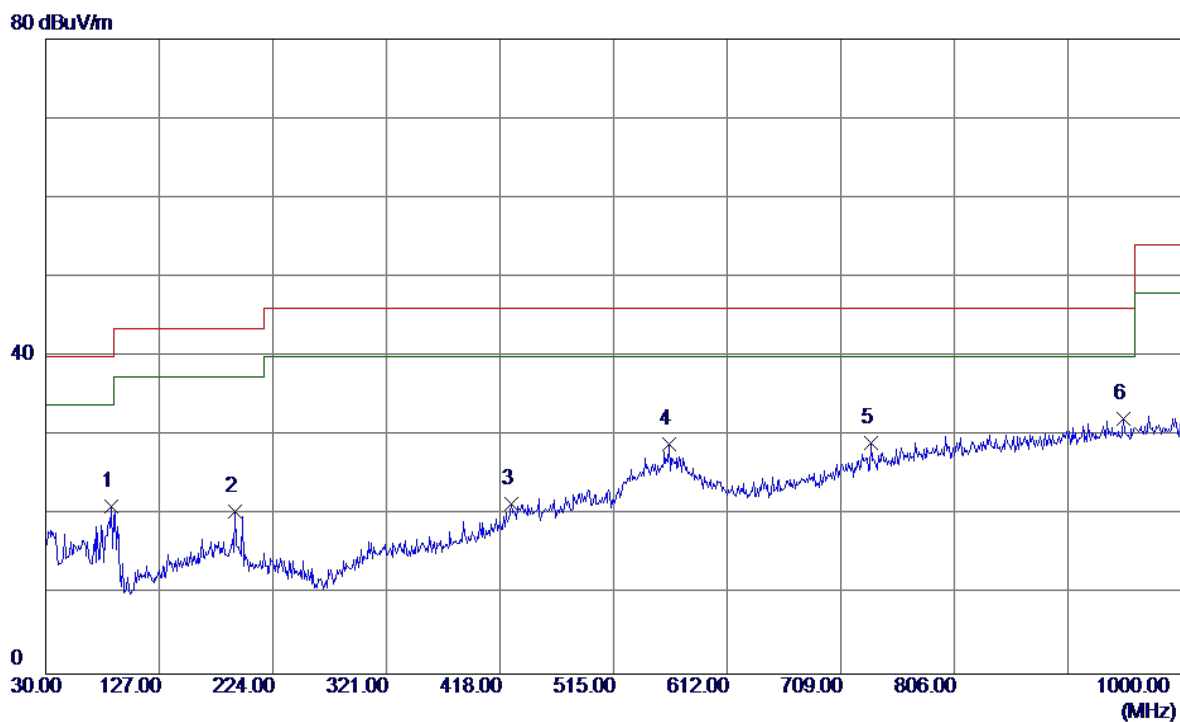

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	86.2600	39.51	-18.46	21.05	40.00	-18.95	Peak	
2	191.9900	33.53	-13.03	20.50	43.50	-23.00	Peak	
3	427.7000	31.99	-10.57	21.42	46.00	-24.58	Peak	
4	562.5300	36.39	-7.39	29.00	46.00	-17.00	Peak	
5	735.1900	32.01	-2.89	29.12	46.00	-16.88	Peak	
6 *	950.5300	30.10	2.01	32.11	46.00	-13.89	Peak	

Test Mode: UNII-1/TX A Mode 5240MHz (Adapter: PHITEK)


Horizontal

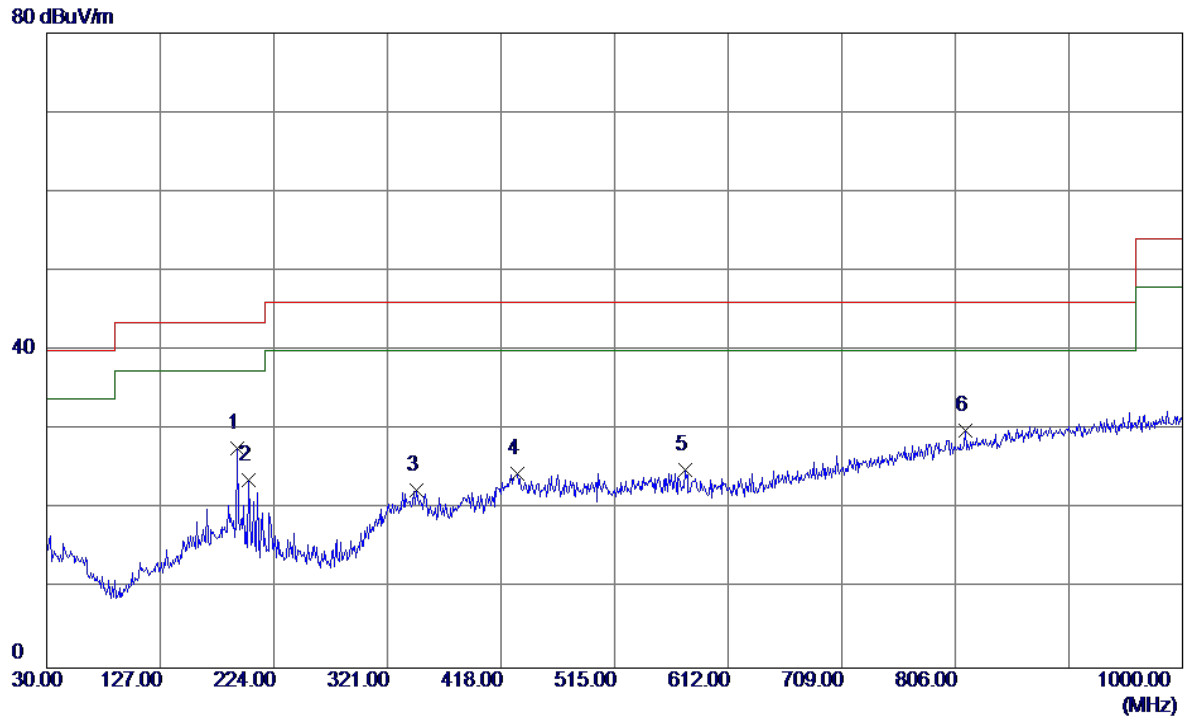

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	192.9600	40.76	-13.11	27.65	43.50	-15.85	Peak	
2	202.6600	37.44	-13.81	23.63	43.50	-19.87	Peak	
3	346.2200	34.47	-12.02	22.45	46.00	-23.55	Peak	
4	431.5800	34.91	-10.46	24.45	46.00	-21.55	Peak	
5	575.1400	31.99	-7.06	24.93	46.00	-21.07	Peak	
6	814.7300	30.93	-0.96	29.97	46.00	-16.03	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter: PHITEK)


Vertical

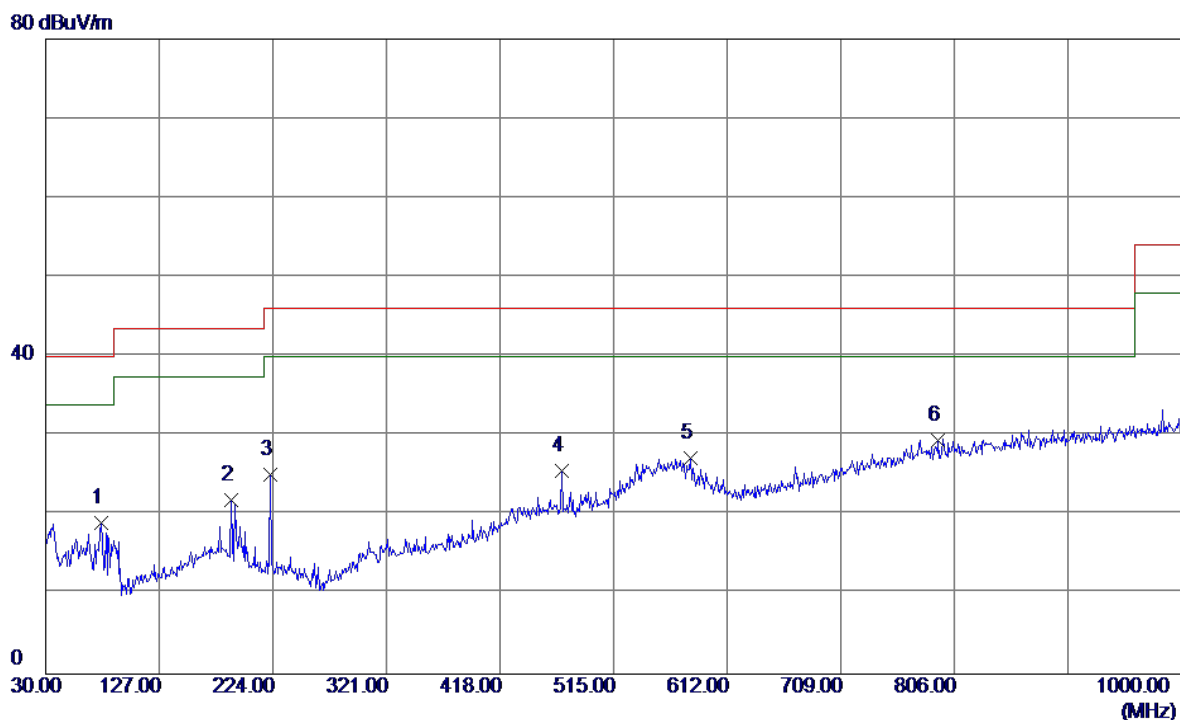

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	77.5300	36.69	-17.67	19.02	40.00	-20.98	Peak	
2	188.1100	34.61	-12.69	21.92	43.50	-21.58	Peak	
3	222.0600	39.13	-13.95	25.18	46.00	-20.82	Peak	
4	470.3800	35.04	-9.44	25.60	46.00	-20.40	Peak	
5	580.9600	34.04	-6.91	27.13	46.00	-18.87	Peak	
6 *	792.4200	30.96	-1.52	29.44	46.00	-16.56	Peak	

Test Mode: UNII-2A/TX A Mode 5260MHz (Adapter: PHITEK)


Horizontal

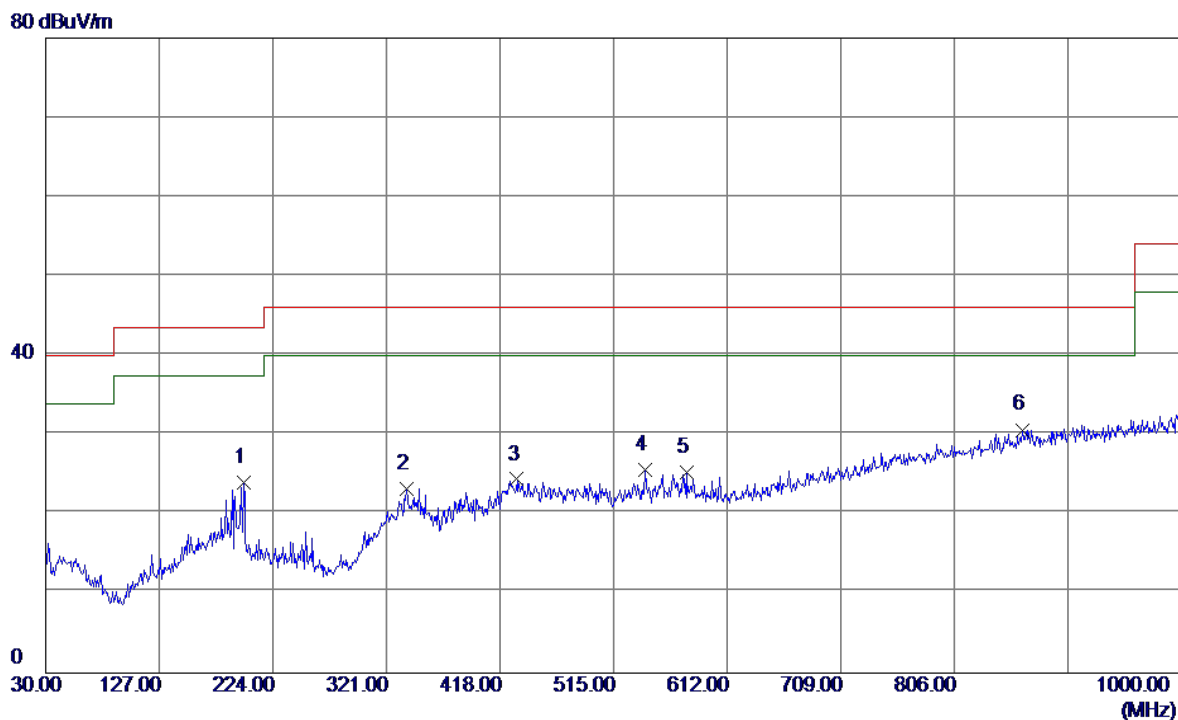

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	198.7800	37.65	-13.64	24.01	43.50	-19.49	Peak	
2	338.4600	35.30	-12.16	23.14	46.00	-22.86	Peak	
3	432.5500	34.84	-10.44	24.40	46.00	-21.60	Peak	
4	542.1599	33.50	-7.87	25.63	46.00	-20.37	Peak	
5	577.0800	32.22	-7.01	25.21	46.00	-20.79	Peak	
6 *	864.2000	30.35	0.29	30.64	46.00	-15.36	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter: PHITEK)

Vertical

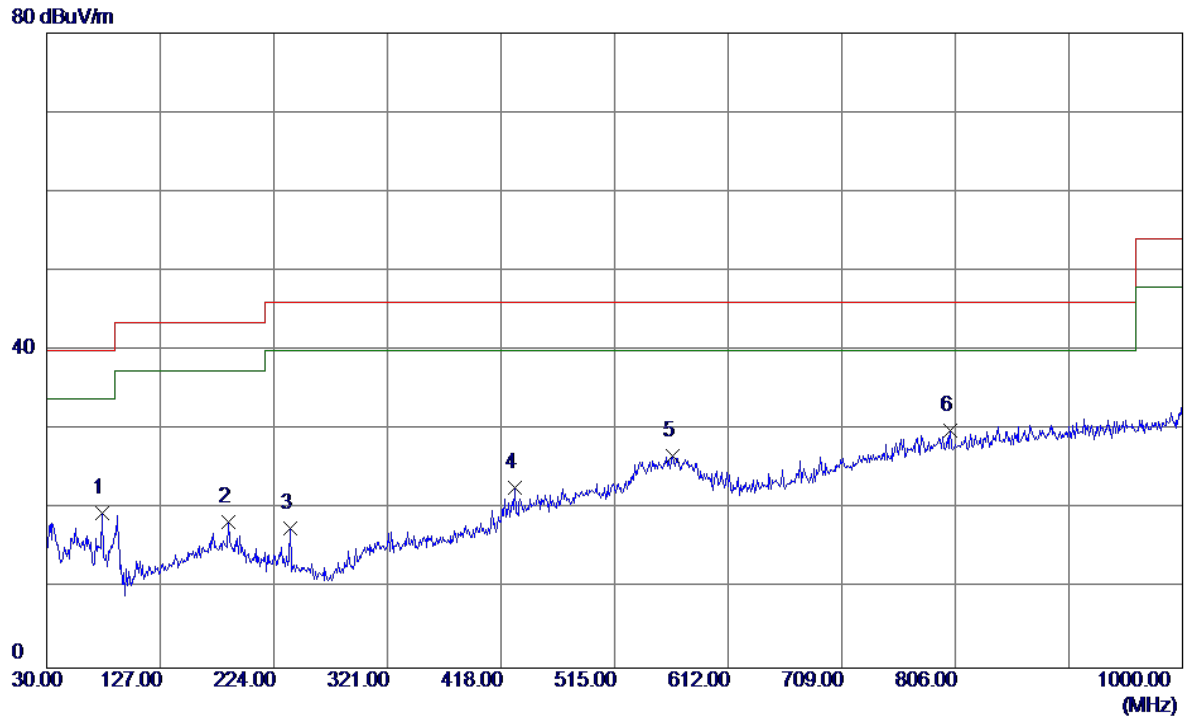


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	77.5300	37.22	-17.67	19.55	40.00	-20.45	Peak	
2	185.2000	30.91	-12.46	18.45	43.50	-25.05	Peak	
3	237.5800	31.92	-14.30	17.62	46.00	-28.38	Peak	
4	429.6400	33.17	-10.52	22.65	46.00	-23.35	Peak	
5	564.4699	34.01	-7.34	26.67	46.00	-19.33	Peak	
6 *	802.1200	31.25	-1.30	29.95	46.00	-16.05	Peak	

Test Mode: UNII-2A/TX A Mode 5320MHz (Adapter: PHITEK)

Horizontal


80 dBuV/m

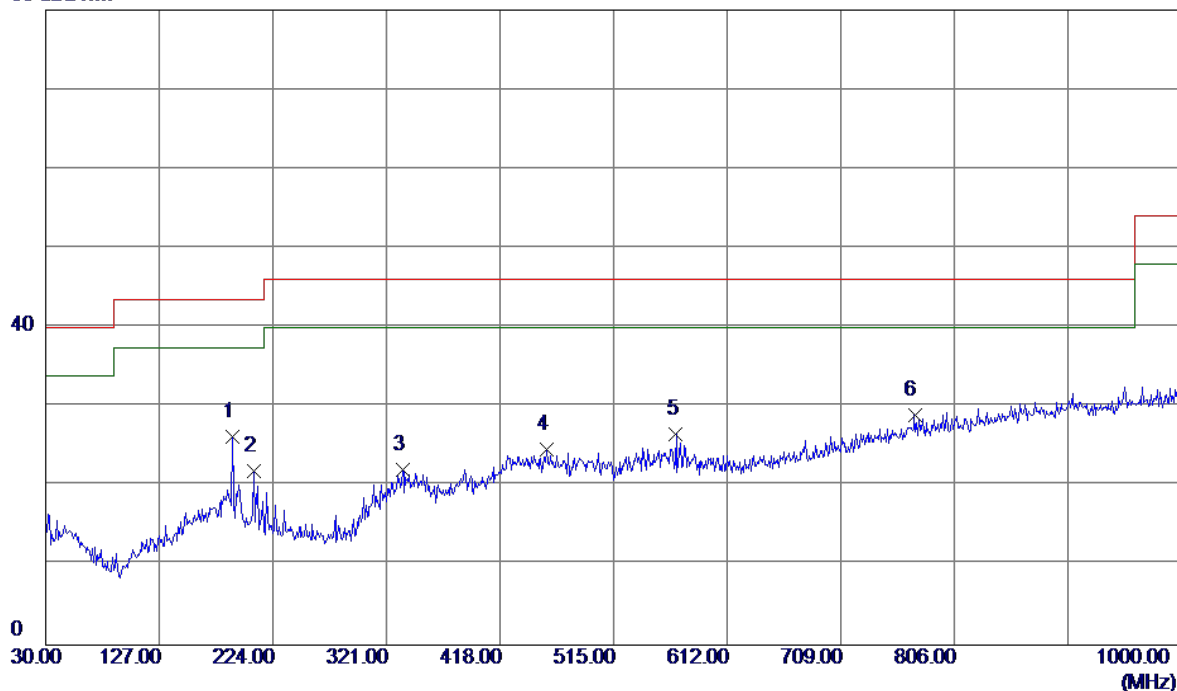

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	189.0800	38.99	-12.77	26.22	43.50	-17.28	Peak	
2	207.5100	35.84	-13.92	21.92	43.50	-21.58	Peak	
3	334.5799	34.29	-12.22	22.07	46.00	-23.93	Peak	
4	457.7700	34.32	-9.75	24.57	46.00	-21.43	Peak	
5	568.3500	33.81	-7.24	26.57	46.00	-19.43	Peak	
6 *	772.0500	30.88	-1.97	28.91	46.00	-17.09	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter: PHITEK)


Vertical

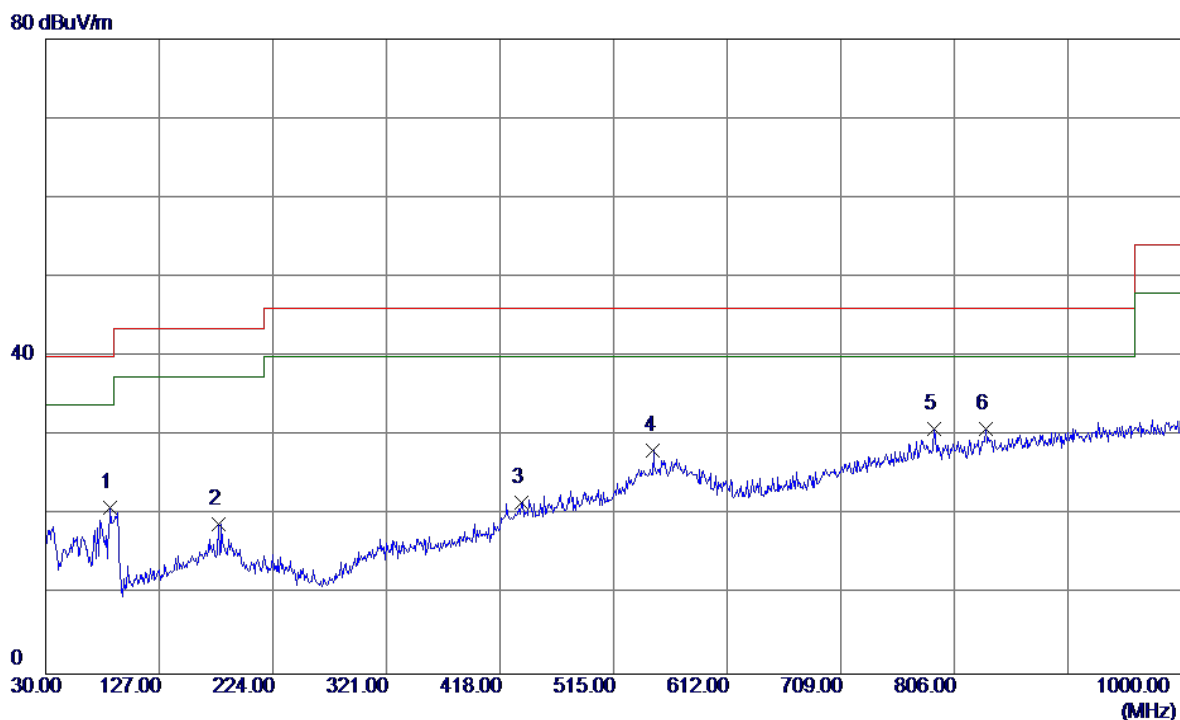

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	85.2900	39.42	-18.41	21.01	40.00	-18.99	Peak	
2	177.4400	31.05	-12.12	18.93	43.50	-24.57	Peak	
3	436.4300	32.00	-10.33	21.67	46.00	-24.33	Peak	
4	548.9500	35.95	-7.74	28.21	46.00	-17.79	Peak	
5	788.5400	32.47	-1.61	30.86	46.00	-15.14	Peak	
6 *	833.1599	31.33	-0.46	30.87	46.00	-15.13	Peak	

Test Mode: UNII-2C/TX A Mode 5500MHz (Adapter: PHITEK)


Horizontal

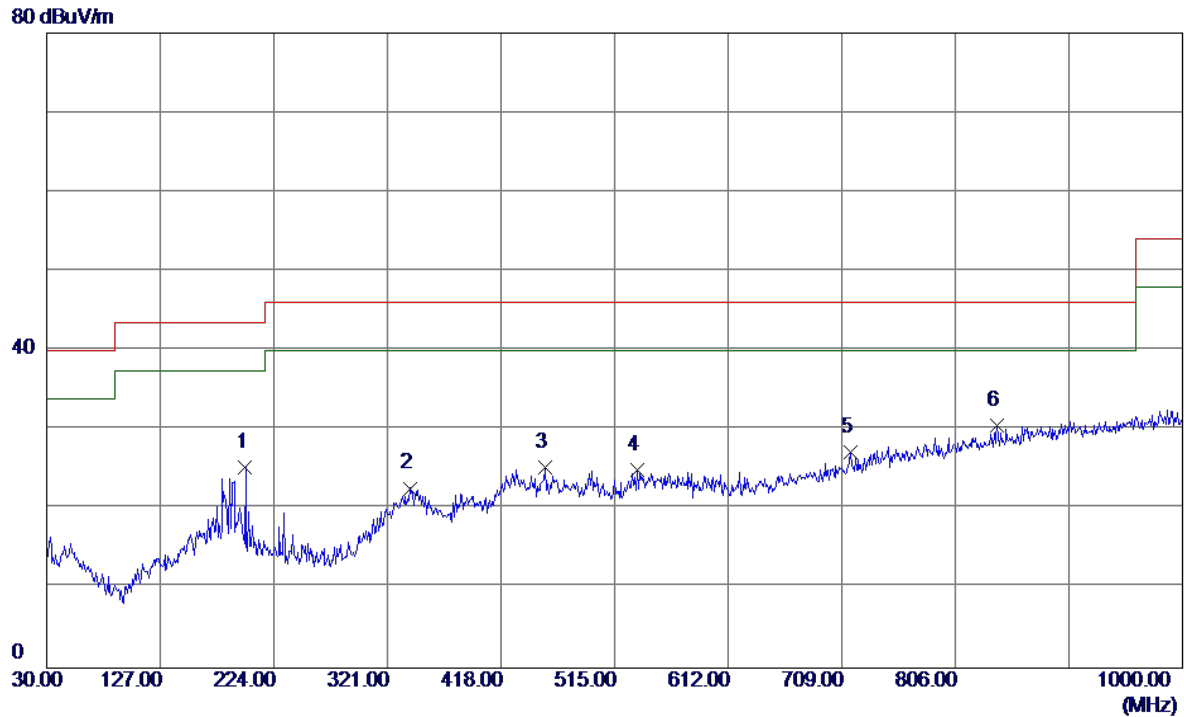

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	199.7500	38.99	-13.73	25.26	43.50	-18.24	Peak	
2	340.4000	34.76	-12.12	22.64	46.00	-23.36	Peak	
3	455.8300	35.09	-9.80	25.29	46.00	-20.71	Peak	
4	534.4000	32.97	-8.03	24.94	46.00	-21.06	Peak	
5	716.7600	30.70	-3.44	27.26	46.00	-18.74	Peak	
6 *	841.8900	30.79	-0.22	30.57	46.00	-15.43	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter: PHITEK)

Vertical

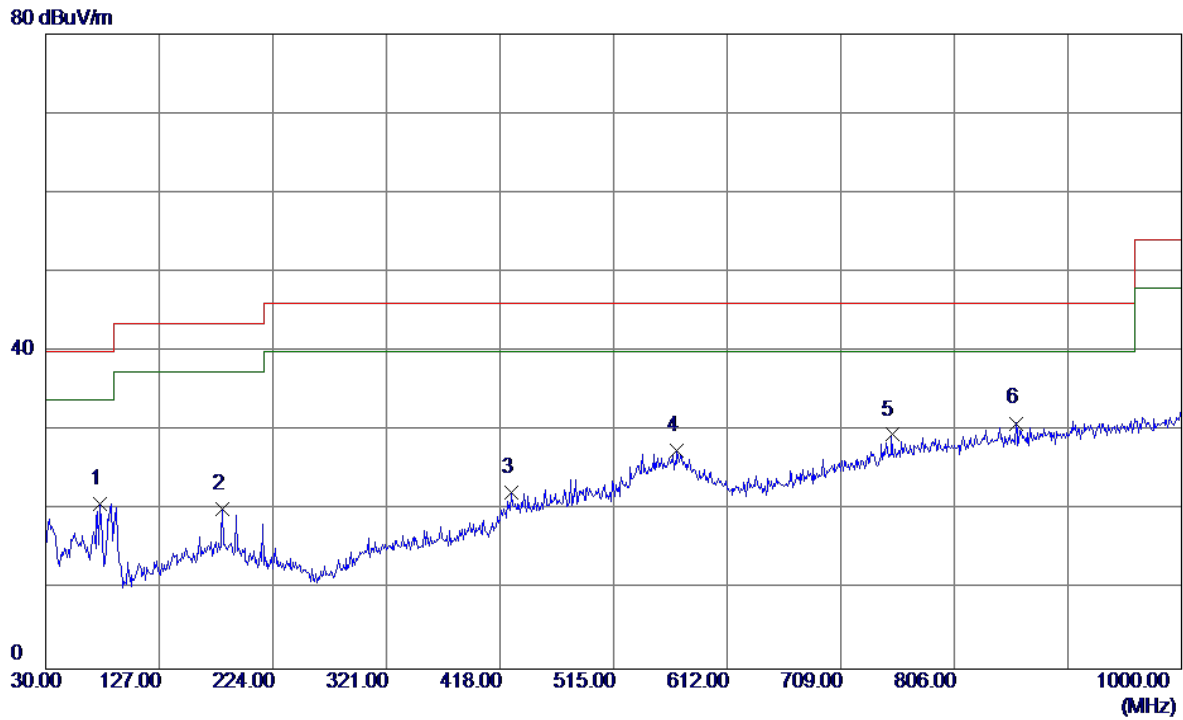


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	76.5600	38.26	-17.44	20.82	40.00	-19.18	Peak	
2	181.3200	32.36	-12.15	20.21	43.50	-23.29	Peak	
3	427.7000	32.86	-10.57	22.29	46.00	-23.71	Peak	
4	569.3200	34.76	-7.21	27.55	46.00	-18.45	Peak	
5	752.6500	31.91	-2.39	29.52	46.00	-16.48	Peak	
6 *	858.3800	30.79	0.17	30.96	46.00	-15.04	Peak	

Test Mode: UNII-2C/TX A Mode 5700MHz (Adapter: PHITEK)

Horizontal


80 dBuV/m

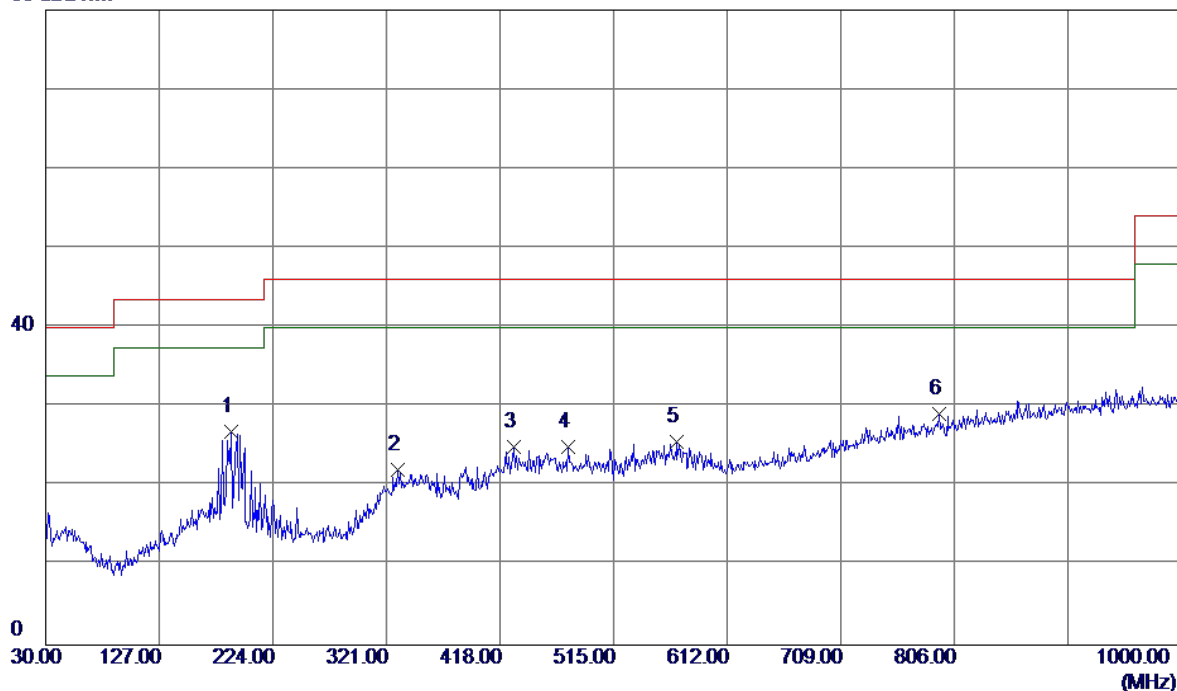

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	188.1100	39.61	-12.69	26.92	43.50	-16.58	Peak	
2	330.7000	34.32	-12.29	22.03	46.00	-23.97	Peak	
3	429.6400	35.47	-10.52	24.95	46.00	-21.05	Peak	
4	476.2000	34.27	-9.30	24.97	46.00	-21.03	Peak	
5	569.3200	32.87	-7.21	25.66	46.00	-20.34	Peak	
6	793.3900	30.69	-1.50	29.19	46.00	-16.81	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter: PHITEK)


Vertical

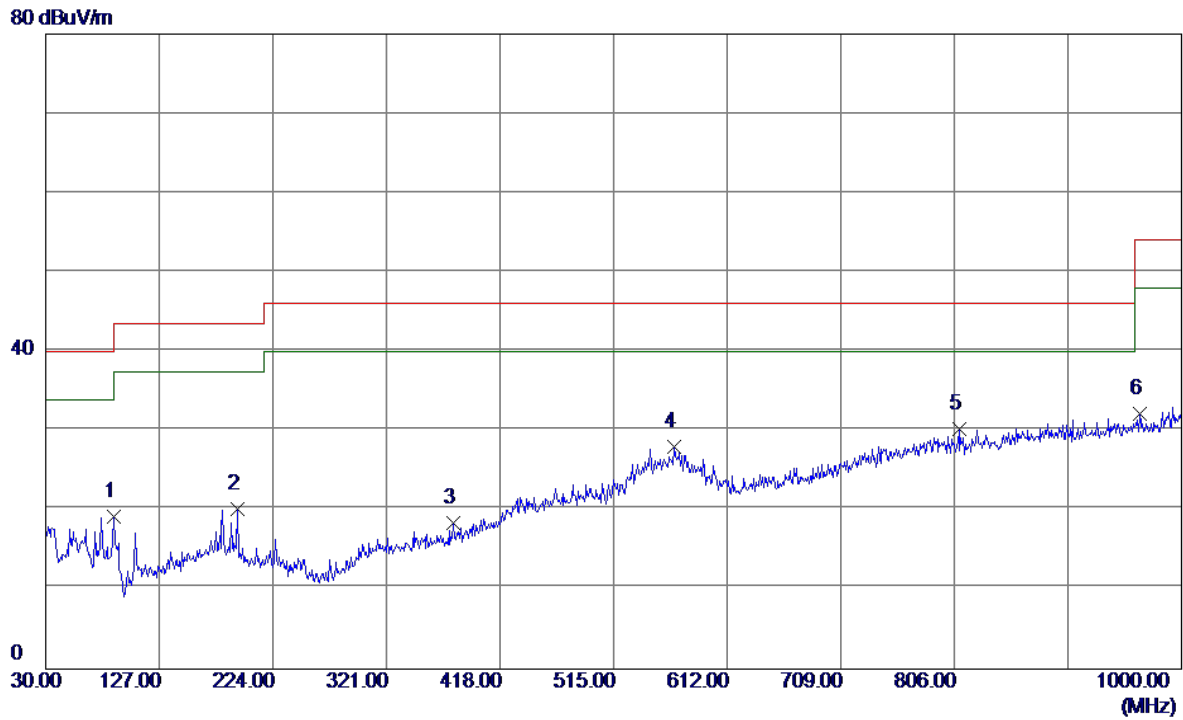

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	88.2000	37.76	-18.56	19.20	43.50	-24.30	Peak	
2	193.9299	33.29	-13.20	20.09	43.50	-23.41	Peak	
3	378.2300	30.06	-11.62	18.44	46.00	-27.56	Peak	
4	566.4099	35.23	-7.29	27.94	46.00	-18.06	Peak	
5 *	809.8800	31.29	-1.09	30.20	46.00	-15.80	Peak	
6	964.1100	29.87	2.27	32.14	54.00	-21.86	Peak	

Test Mode: UNII-3/TX A Mode 5745MHz (Adapter: PHITEK)


Horizontal

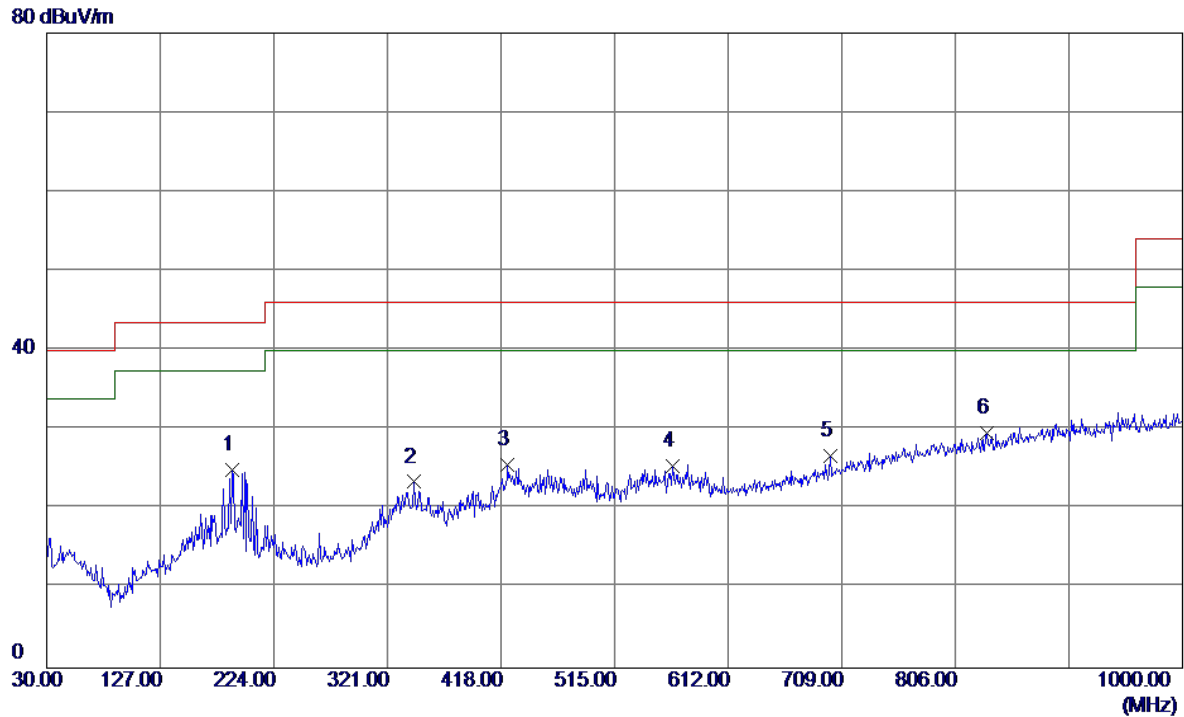

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	188.1100	37.64	-12.69	24.95	43.50	-18.55	Peak	
2	343.3100	35.51	-12.07	23.44	46.00	-22.56	Peak	
3	423.8200	36.26	-10.68	25.58	46.00	-20.42	Peak	
4	564.4699	32.77	-7.34	25.43	46.00	-20.57	Peak	
5	699.3000	30.70	-3.96	26.74	46.00	-19.26	Peak	
6 *	833.1599	30.10	-0.46	29.64	46.00	-16.36	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: PHITEK)


Vertical

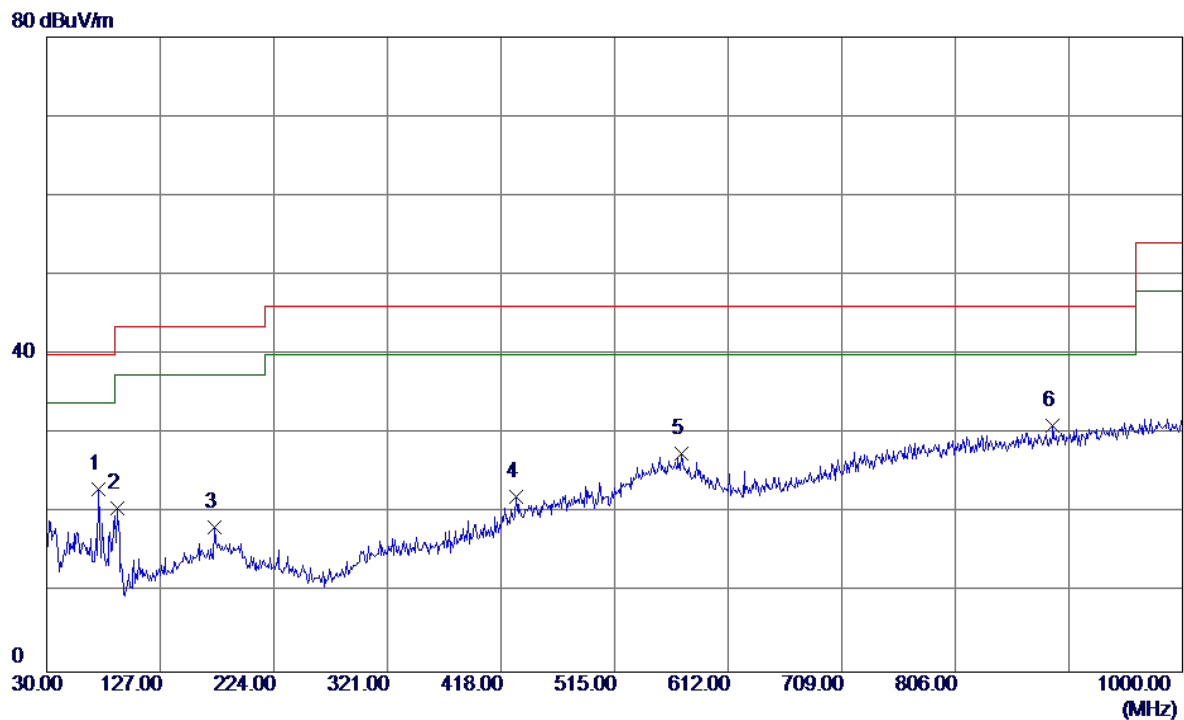

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	74.6200	40.03	-17.04	22.99	40.00	-17.01	Peak	
2	90.1400	39.31	-18.66	20.65	43.50	-22.85	Peak	
3	173.5600	30.50	-12.23	18.27	43.50	-25.23	Peak	
4	430.6100	32.54	-10.49	22.05	46.00	-23.95	Peak	
5	572.2300	34.71	-7.14	27.57	46.00	-18.43	Peak	
6 *	889.4200	30.25	0.81	31.06	46.00	-14.94	Peak	

Test Mode: UNII-3/TX A Mode 5825MHz (Adapter: PHITEK)

Horizontal

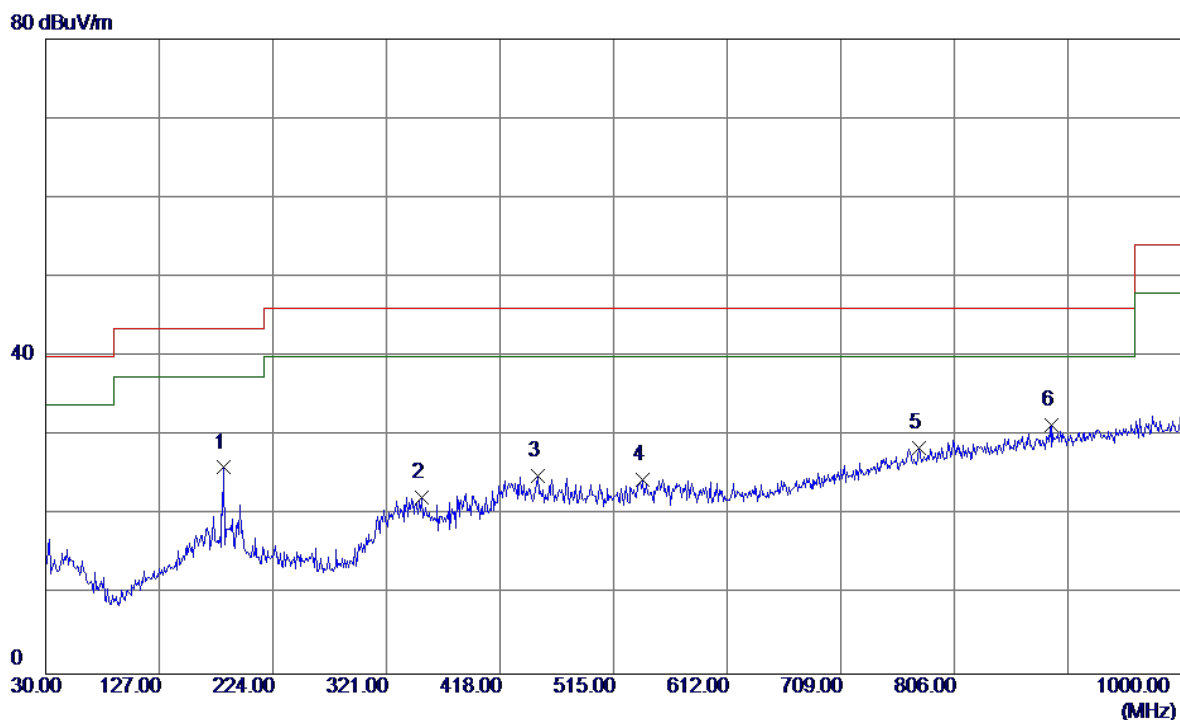

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	182.2899	38.22	-12.22	26.00	43.50	-17.50	Peak	
2	351.0700	34.23	-11.94	22.29	46.00	-23.71	Peak	
3	450.0100	34.96	-9.94	25.02	46.00	-20.98	Peak	
4	540.2199	32.36	-7.91	24.45	46.00	-21.55	Peak	
5	775.9300	30.37	-1.88	28.49	46.00	-17.51	Peak	
6 *	889.4200	30.52	0.81	31.33	46.00	-14.67	Peak	


APPENDIX D - RADIATED EMISSION (ABOVE 1000MHZ)

ANT 1

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

120 dBuV/m

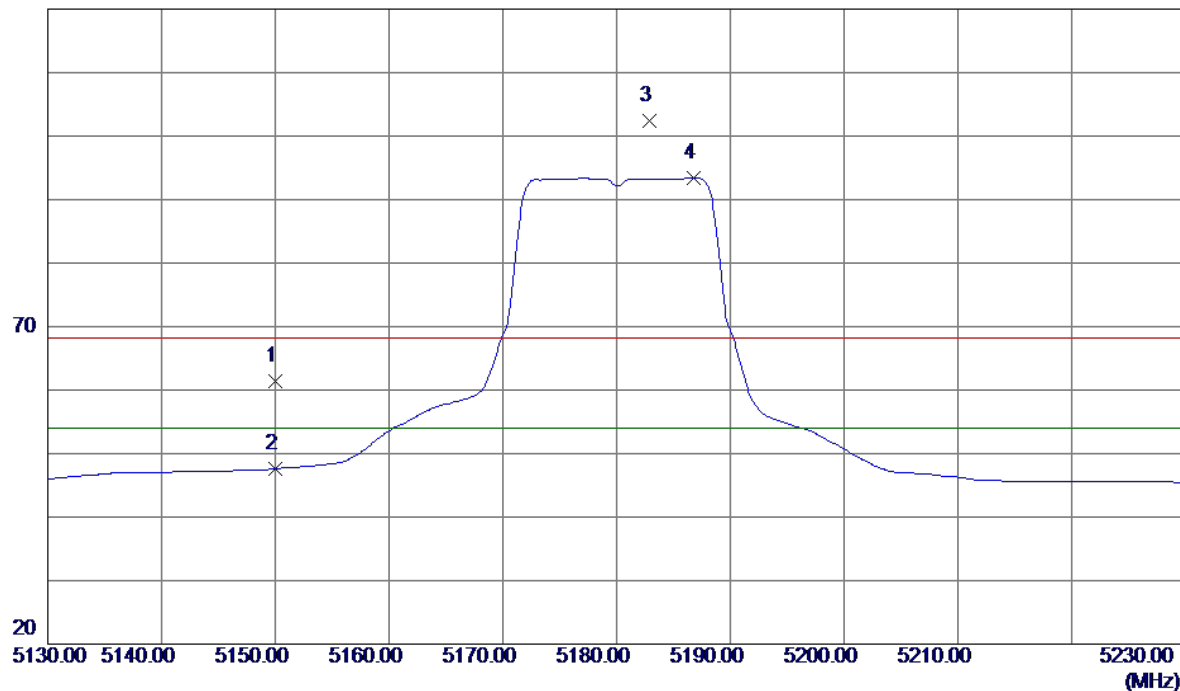


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	20.22	41.10	61.32	68.30	-6.98	Peak	
2	5150.0000	6.50	41.10	47.60	54.00	-6.40	AVG	
3	5182.9000	61.15	41.27	102.42	68.30	34.12	Peak	No Limit
4 *	5186.8000	52.10	41.29	93.39	54.00	39.39	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Vertical

115 dBuV/m

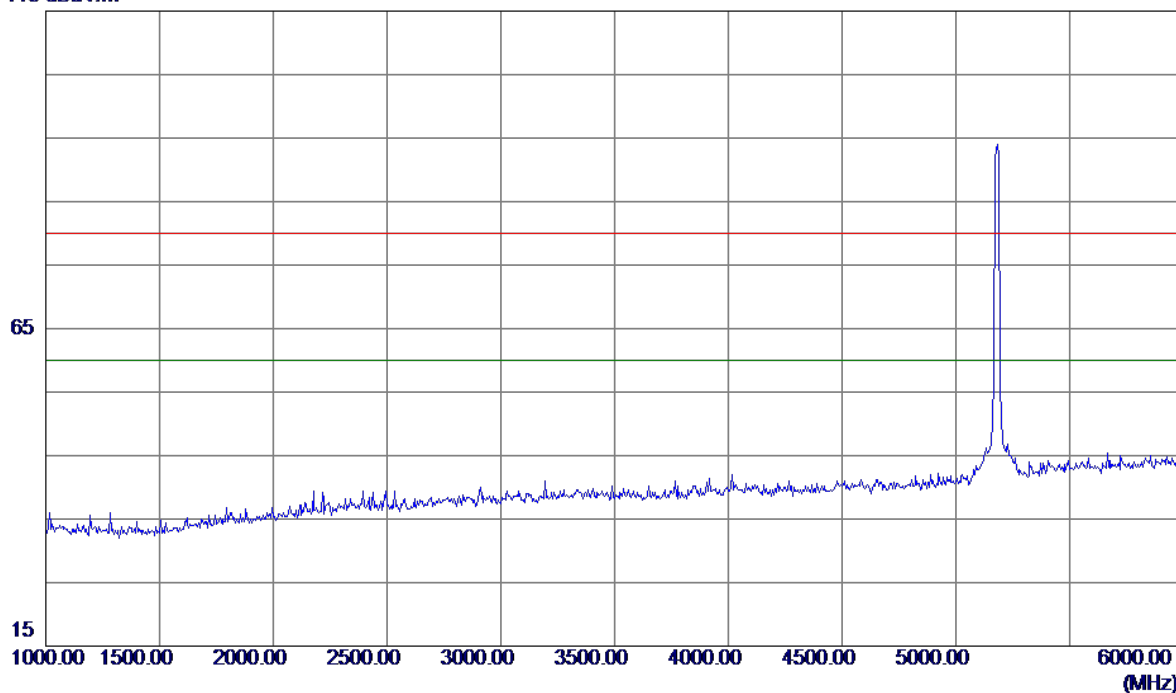


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Vertical

110 dBuV/m

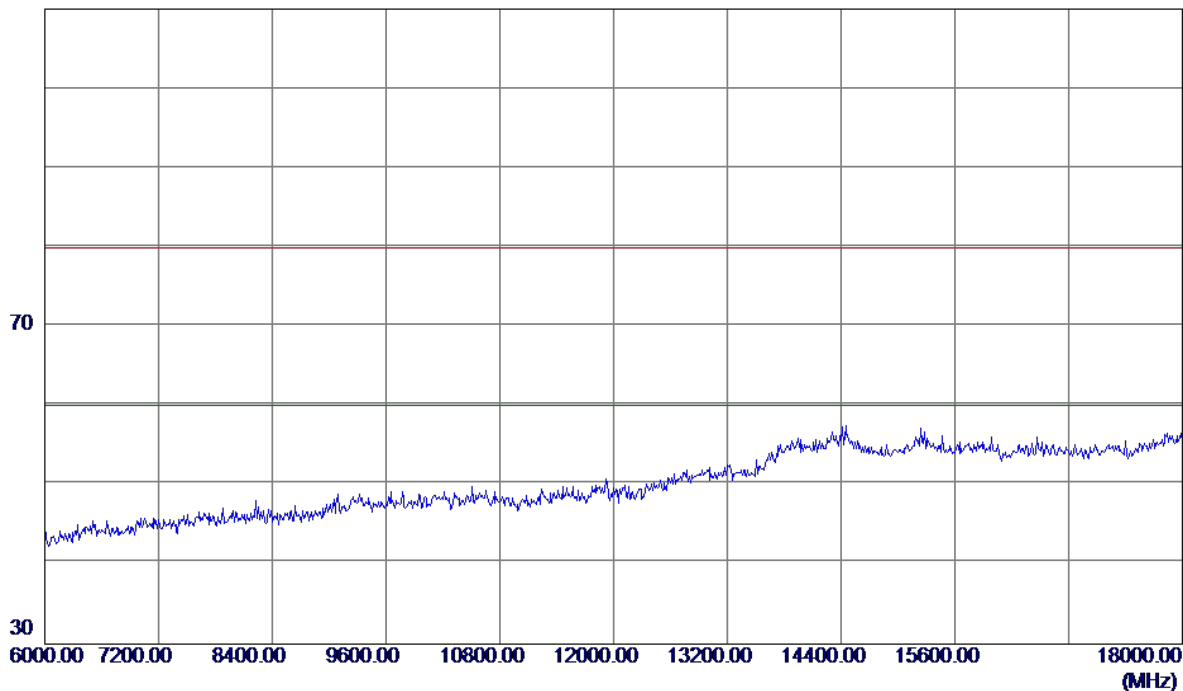


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Vertical

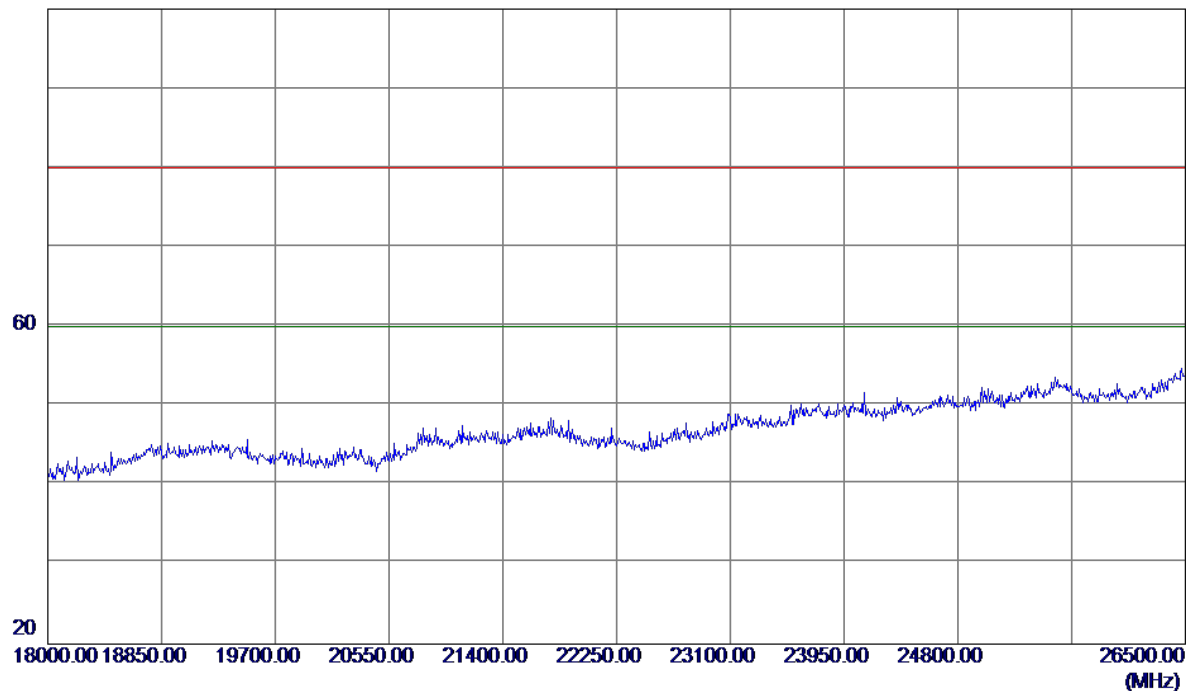

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment


Vertical

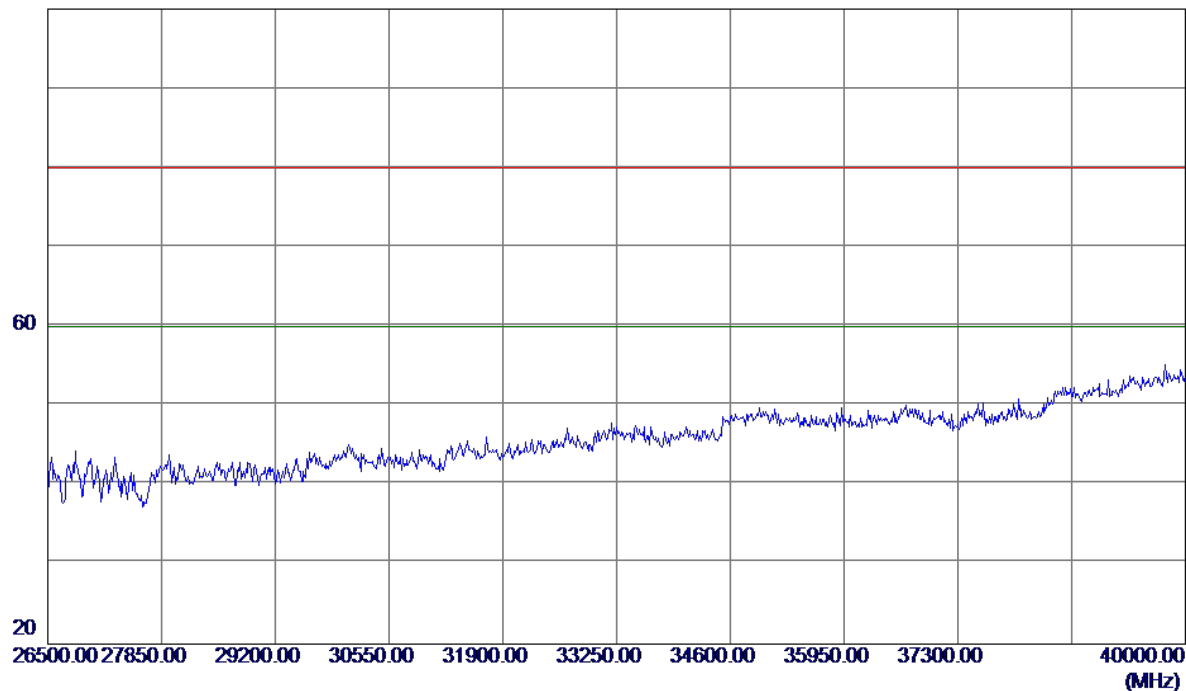

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

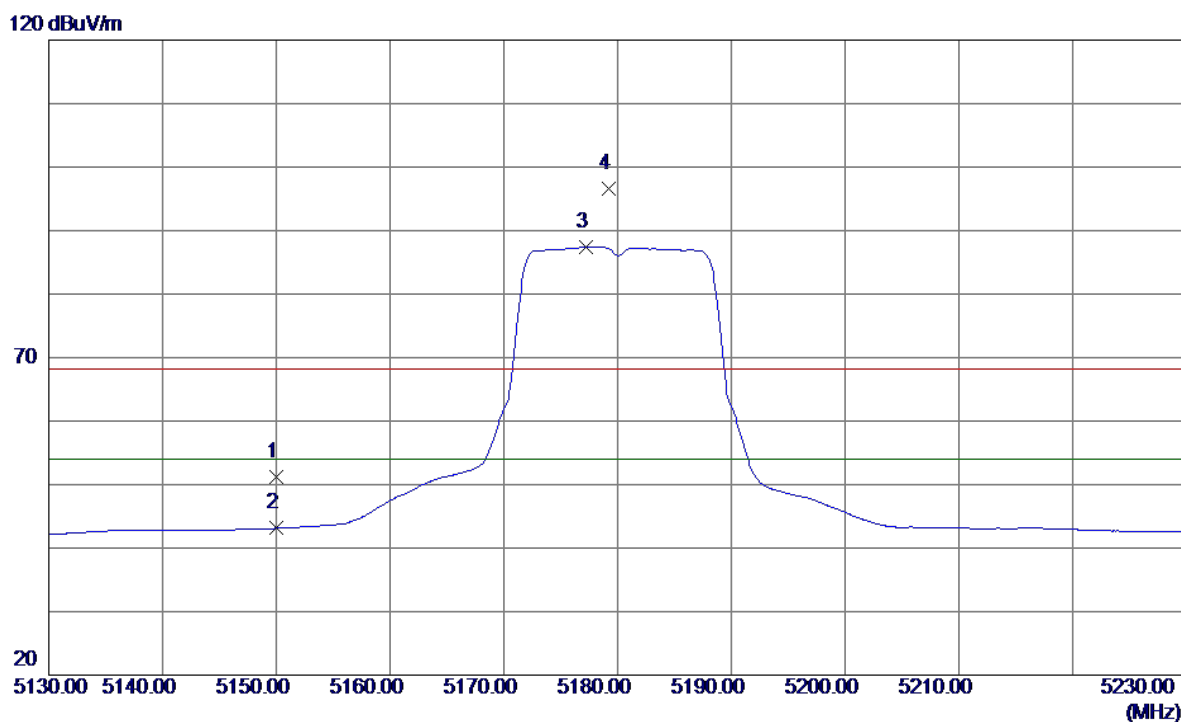


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	10.12	41.10	51.22	68.30	-17.08	Peak	
2	5150.0000	2.02	41.10	43.12	54.00	-10.88	AVG	
3 *	5177.2000	46.11	41.24	87.35	54.00	33.35	AVG	No Limit
4	5179.2000	55.37	41.25	96.62	68.30	28.32	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz

Horizontal

115 dBuV/m

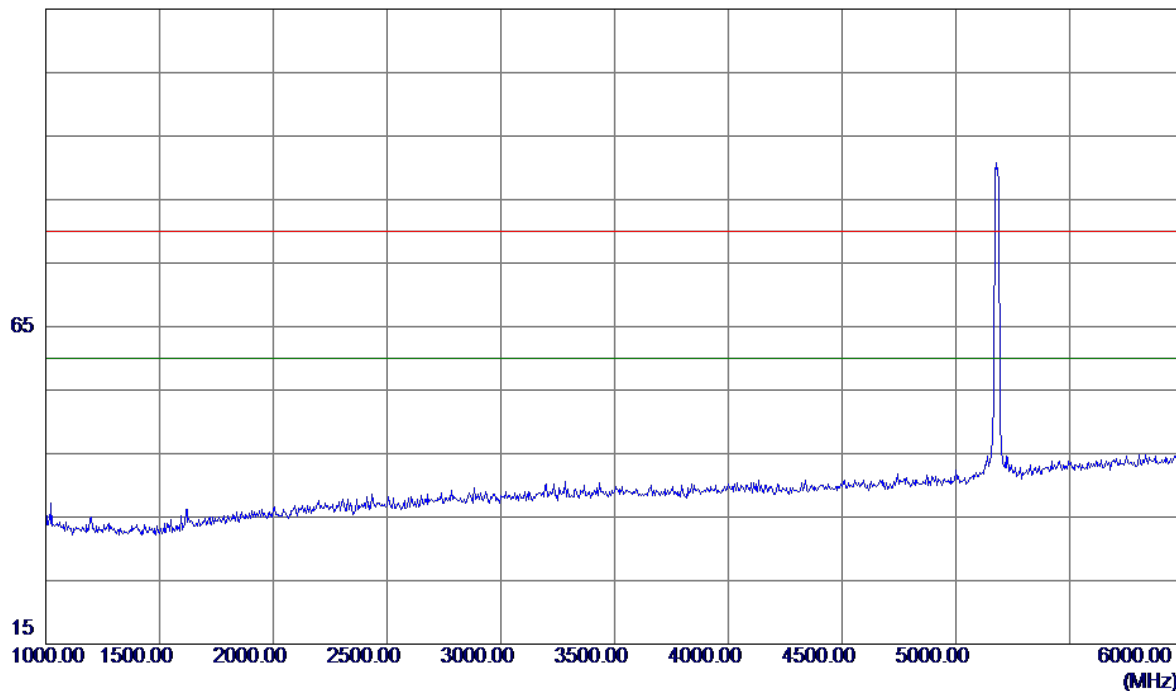


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5180MHz


Horizontal

110 dBuV/m

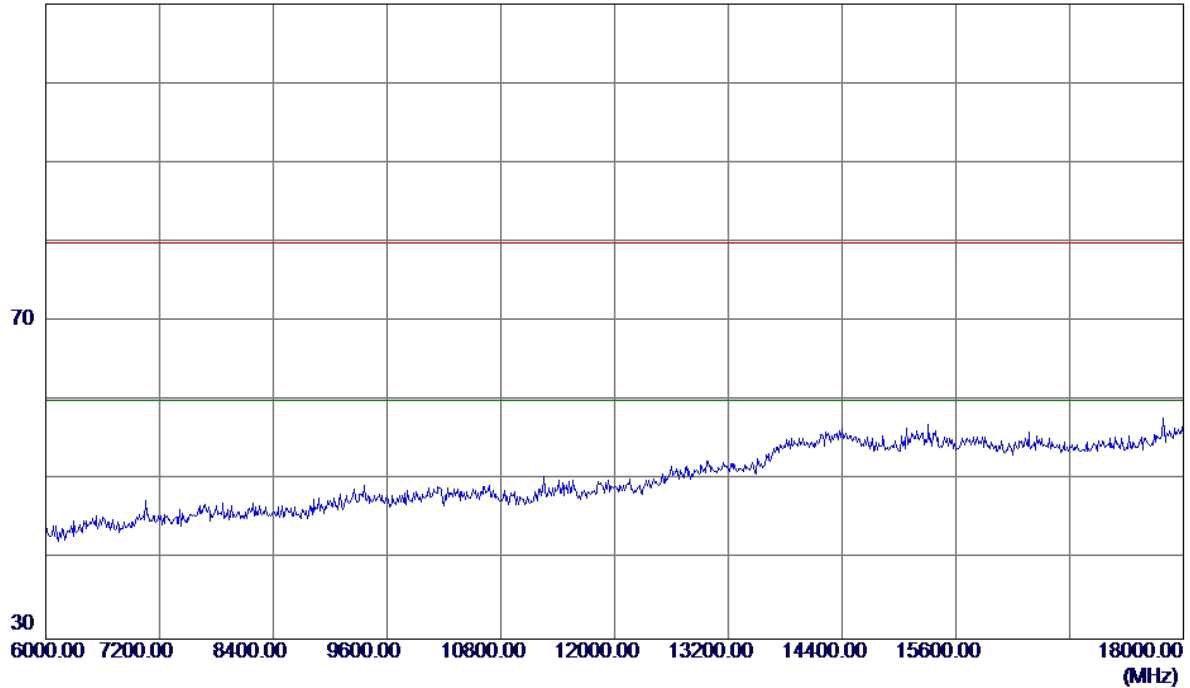


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

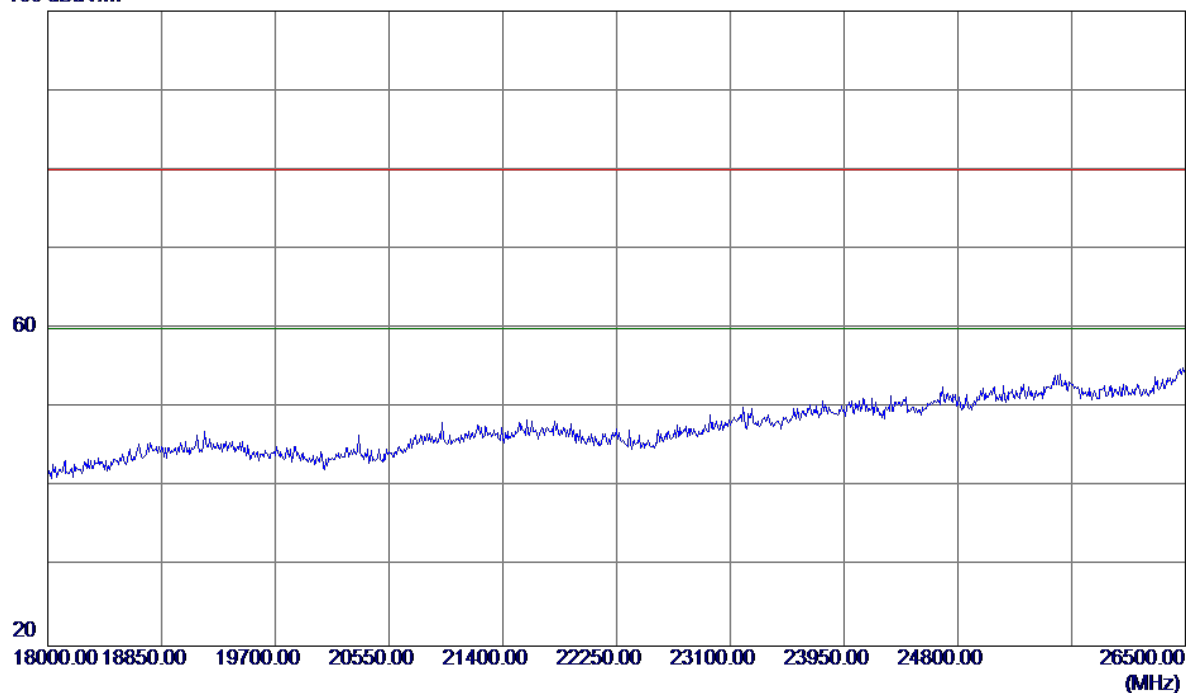

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment


Horizontal



Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

120 dBuV/m

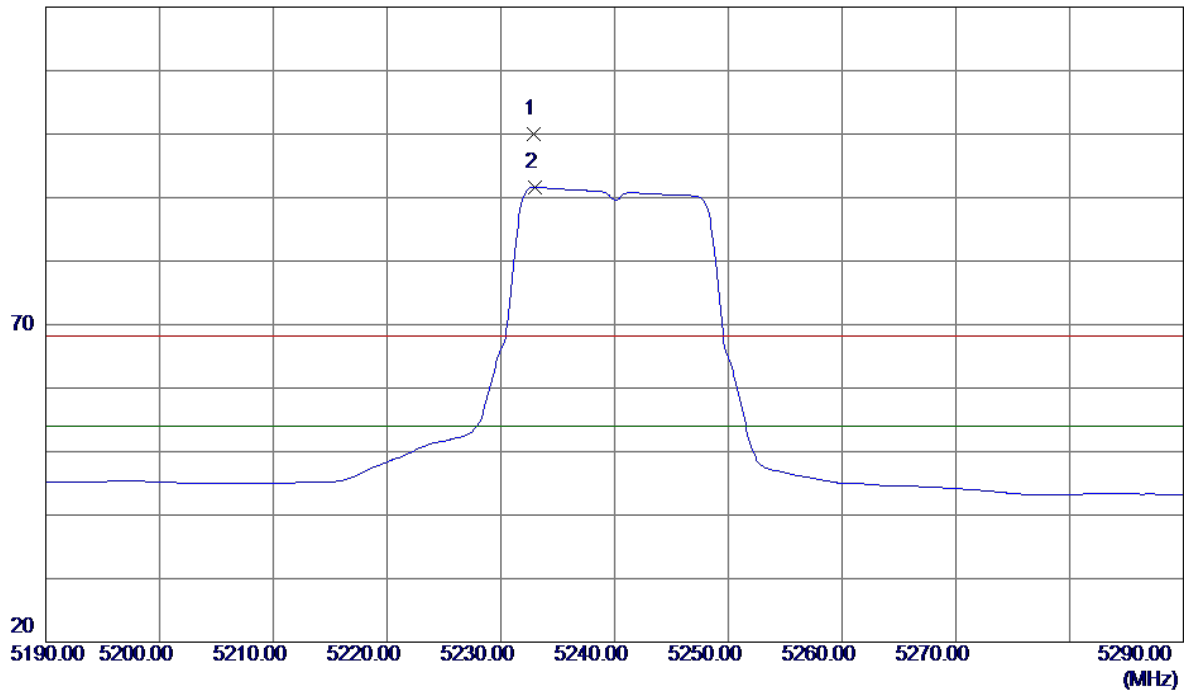


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5232.9000	58.48	41.52	100.00	68.30	31.70	Peak	No Limit
2 *	5233.0000	50.07	41.52	91.59	54.00	37.59	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

115 dBuV/m

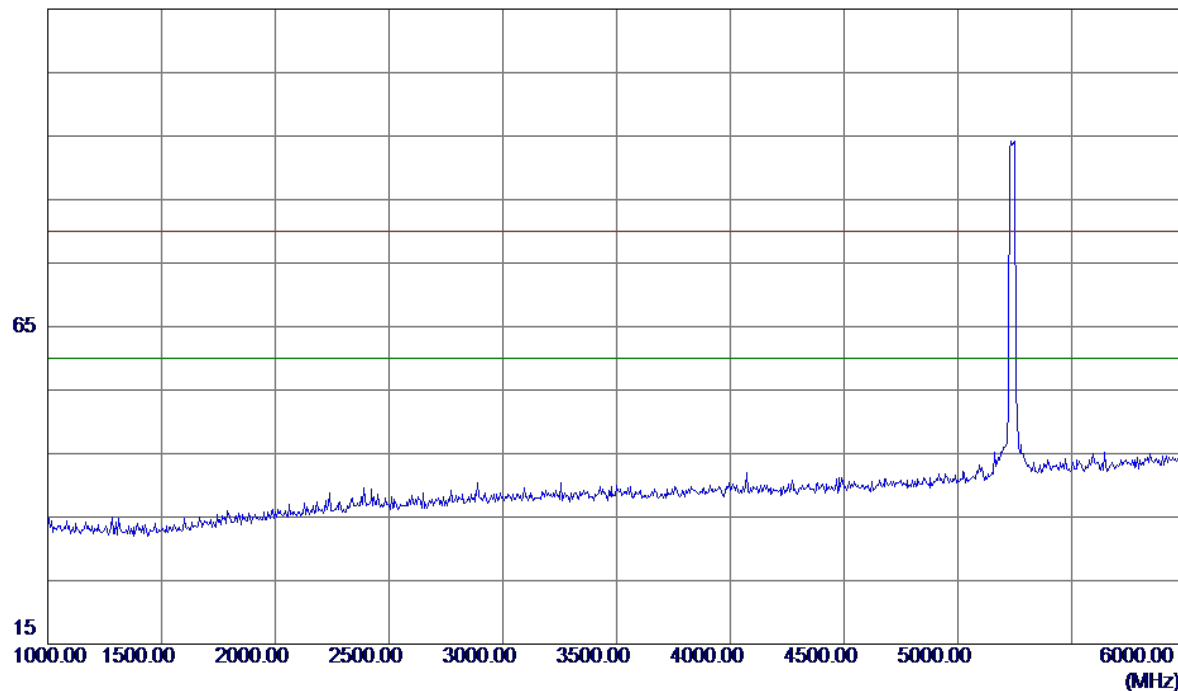


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Vertical

110 dBuV/m

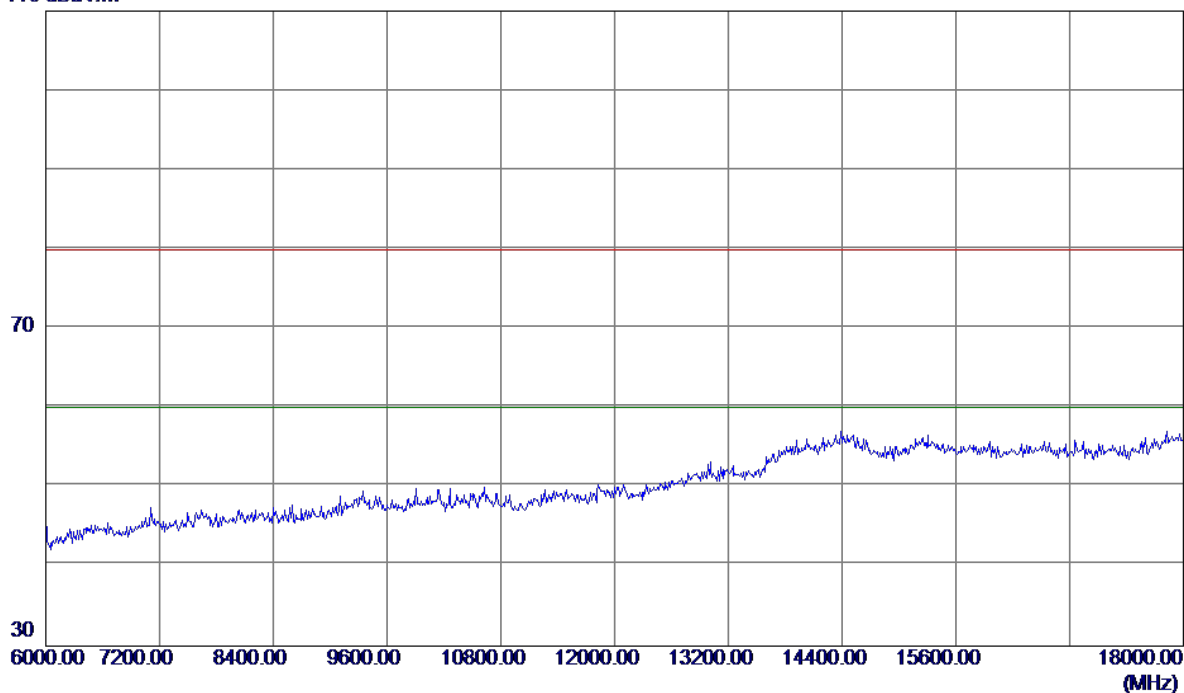


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Vertical

100 dBuV/m

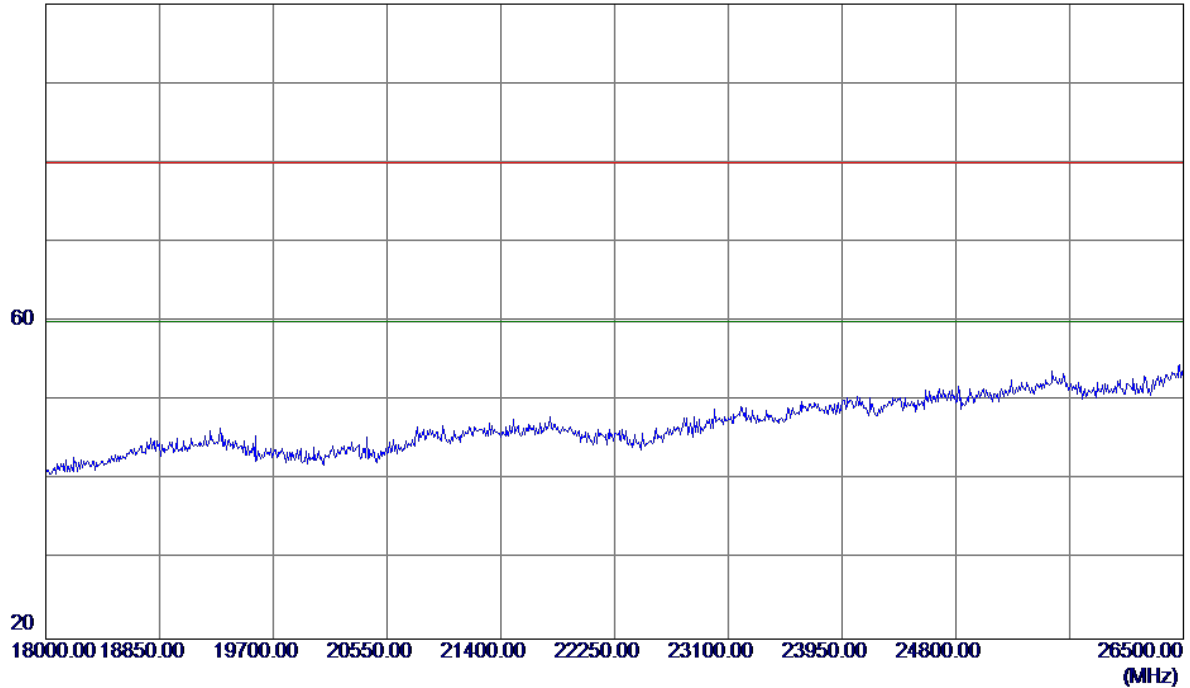

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Vertical

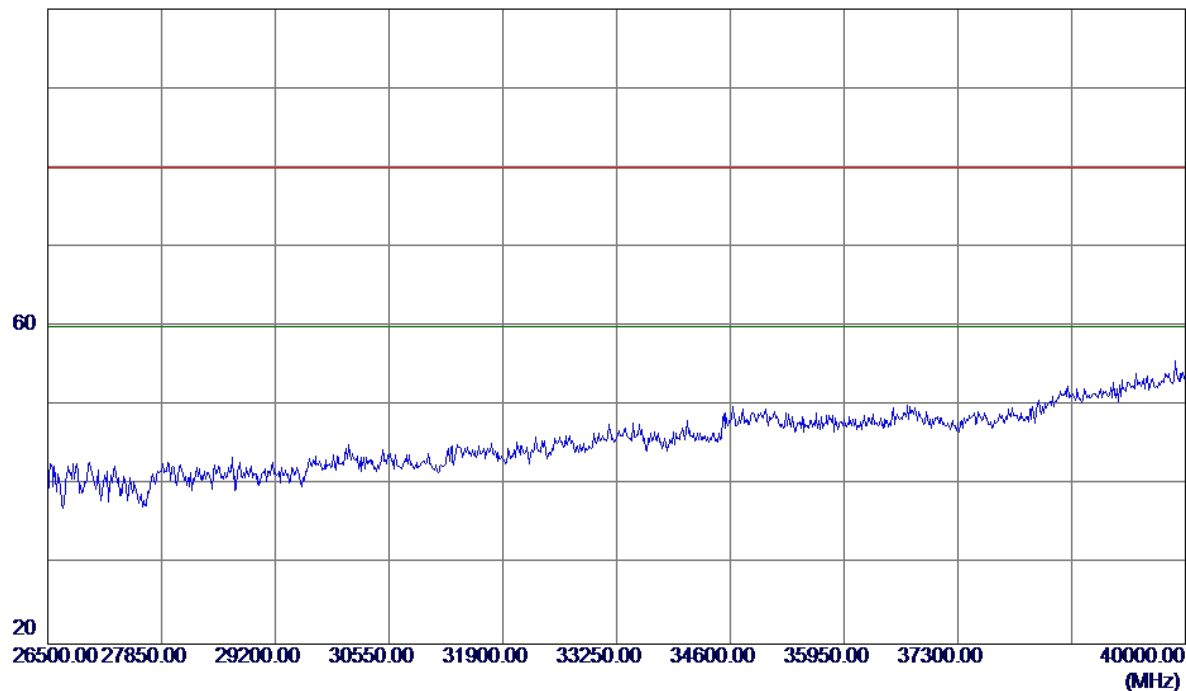


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz


Horizontal

125 dBuV/m

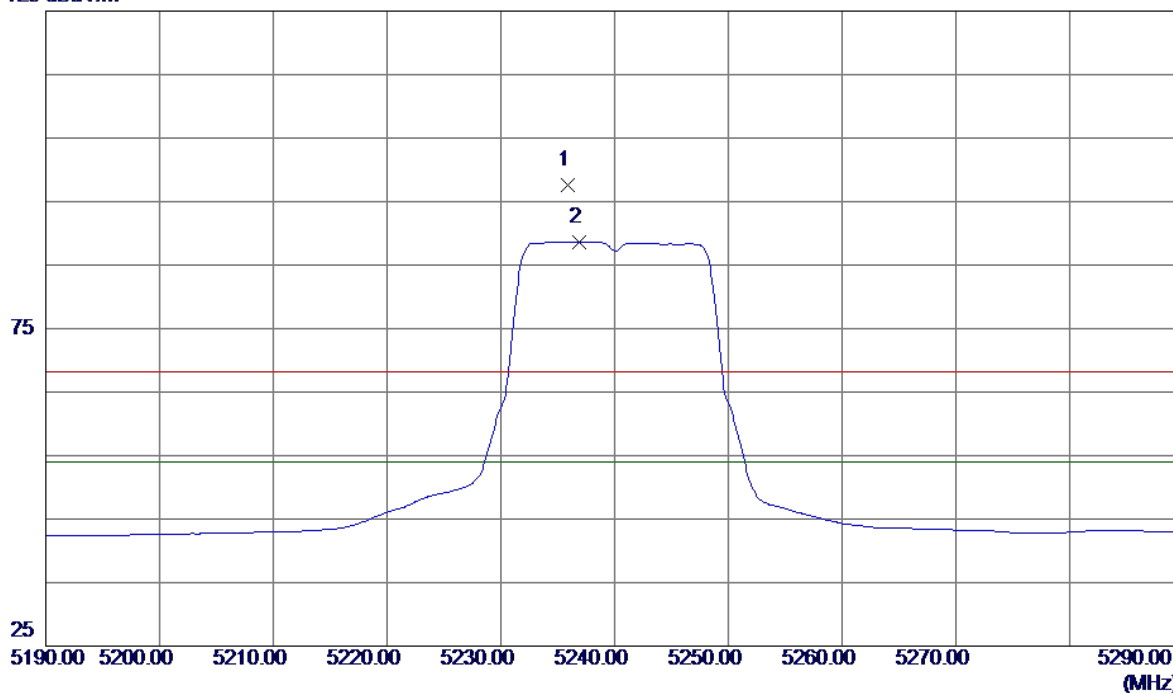

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5235.9000	56.03	41.54	97.57	68.30	29.27	Peak	No Limit
2 *	5236.9000	47.14	41.54	88.68	54.00	34.68	AVG	No Limit


Horizontal

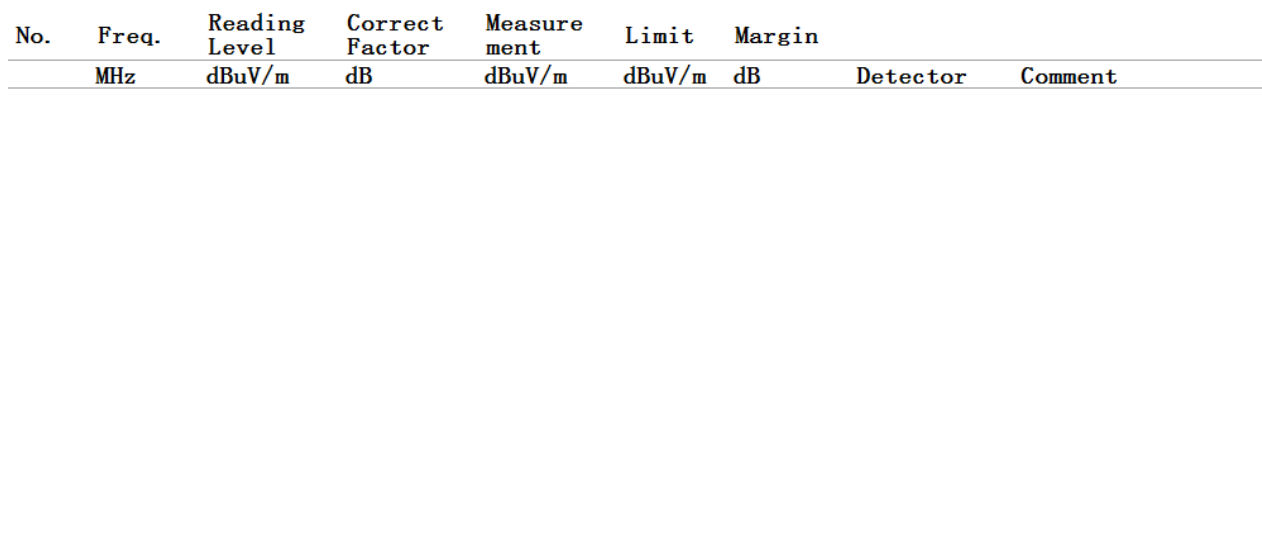

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

110 dBuV/m

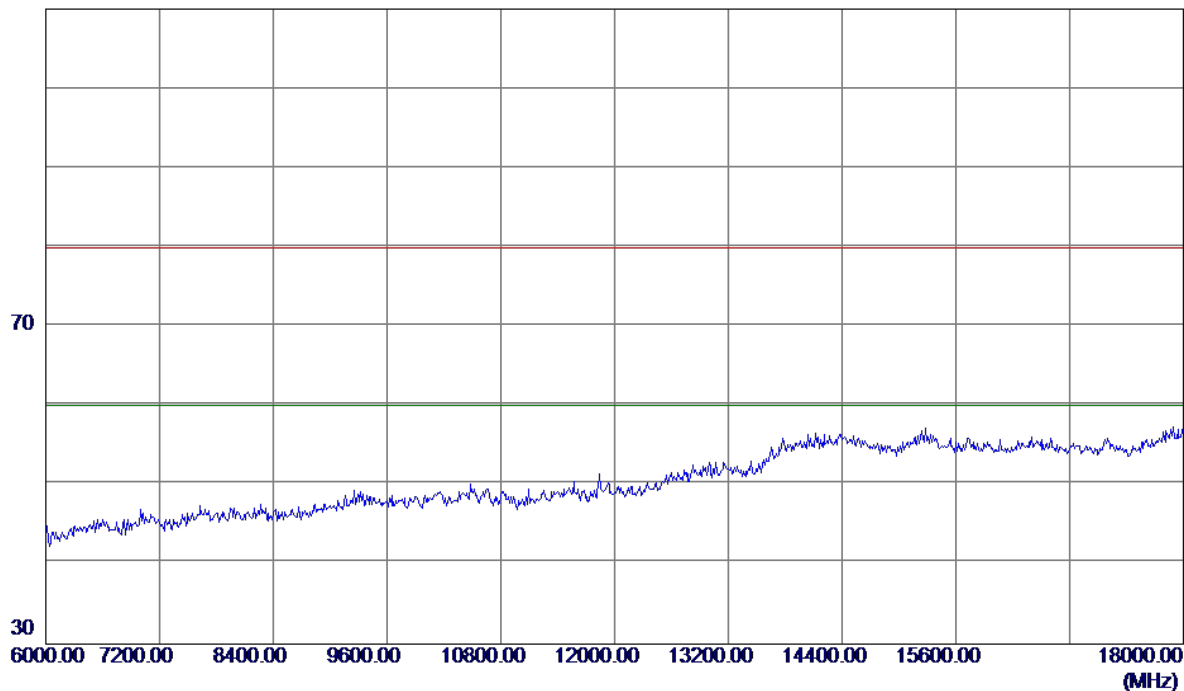


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

100 dBuV/m

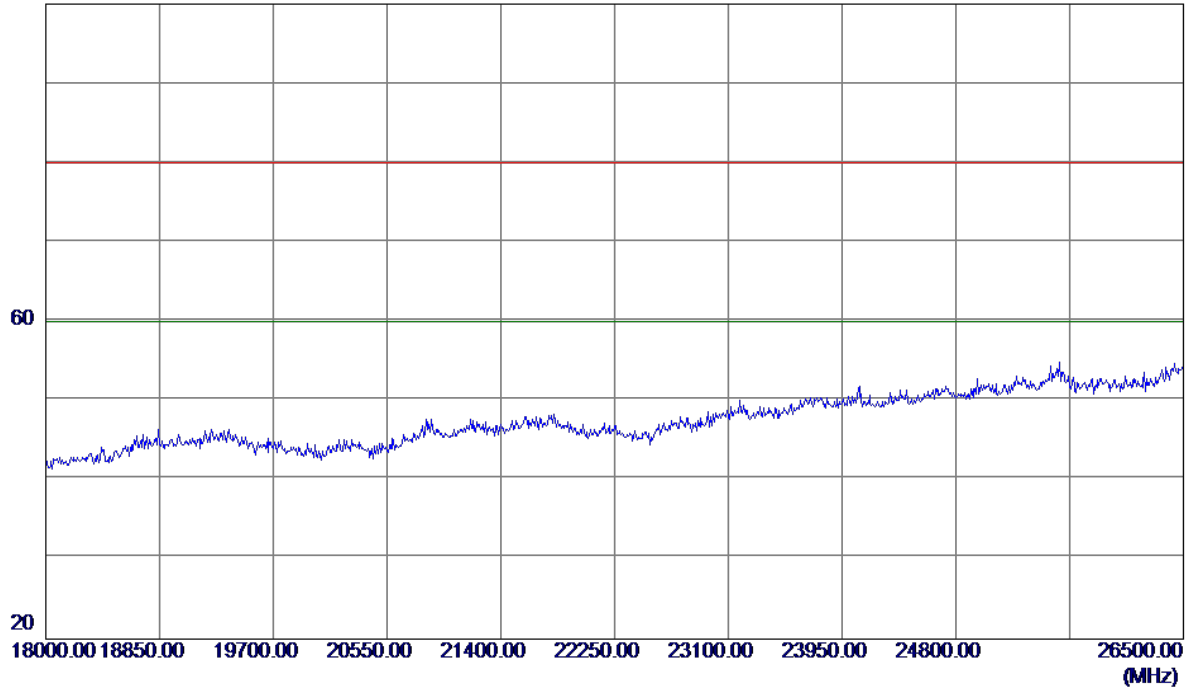


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX A Mode 5240MHz

Horizontal

100 dBuV/m

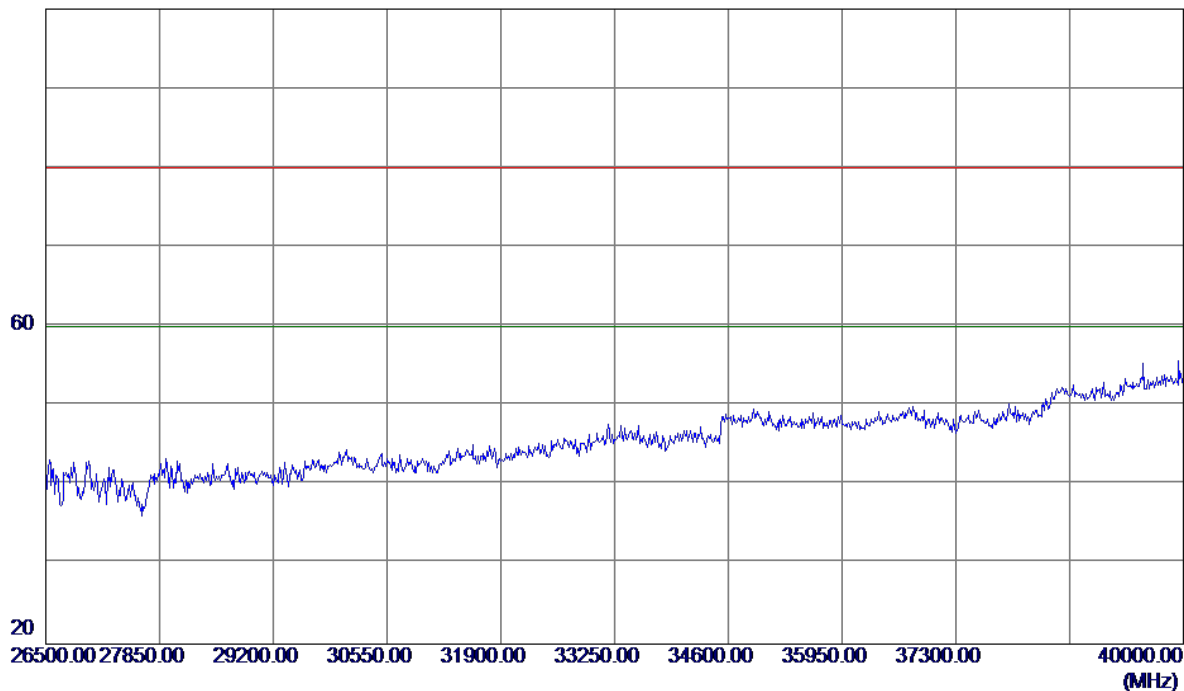


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

125 dBuV/m

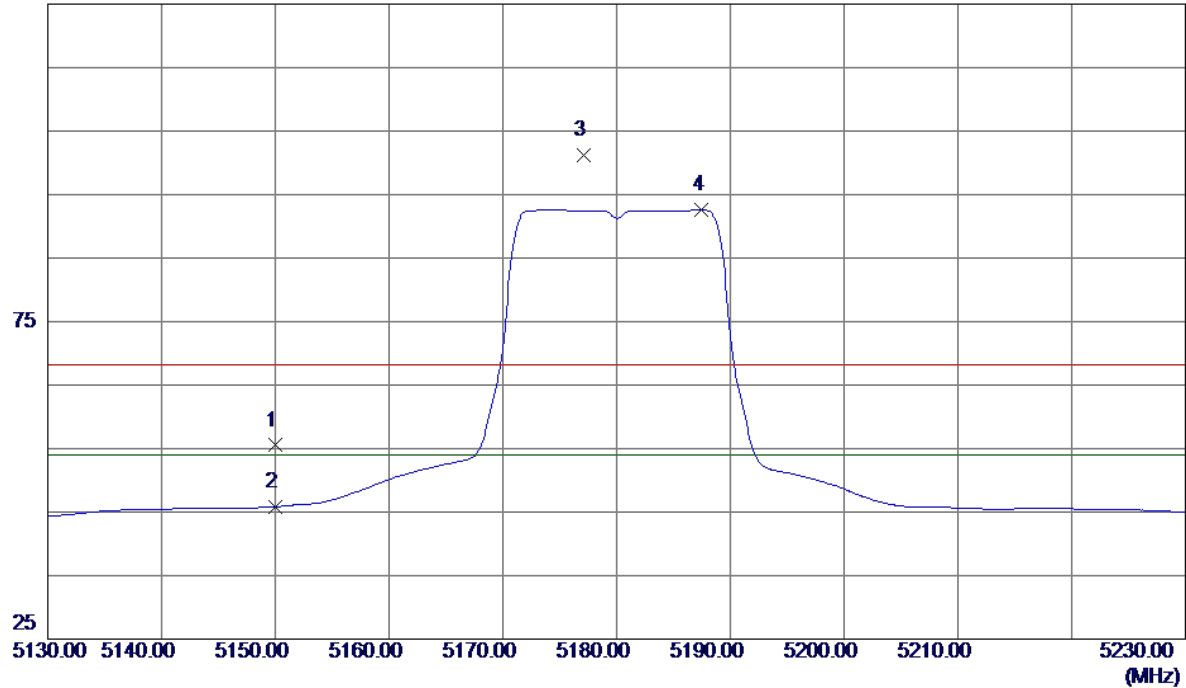


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	14.40	41.10	55.50	68.30	-12.80	Peak	
2	5150.0000	4.74	41.10	45.84	54.00	-8.16	AVG	
3	5177.1000	59.92	41.24	101.16	68.30	32.86	Peak	No Limit
4 *	5187.5000	51.27	41.29	92.56	54.00	38.56	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

115 dBuV/m

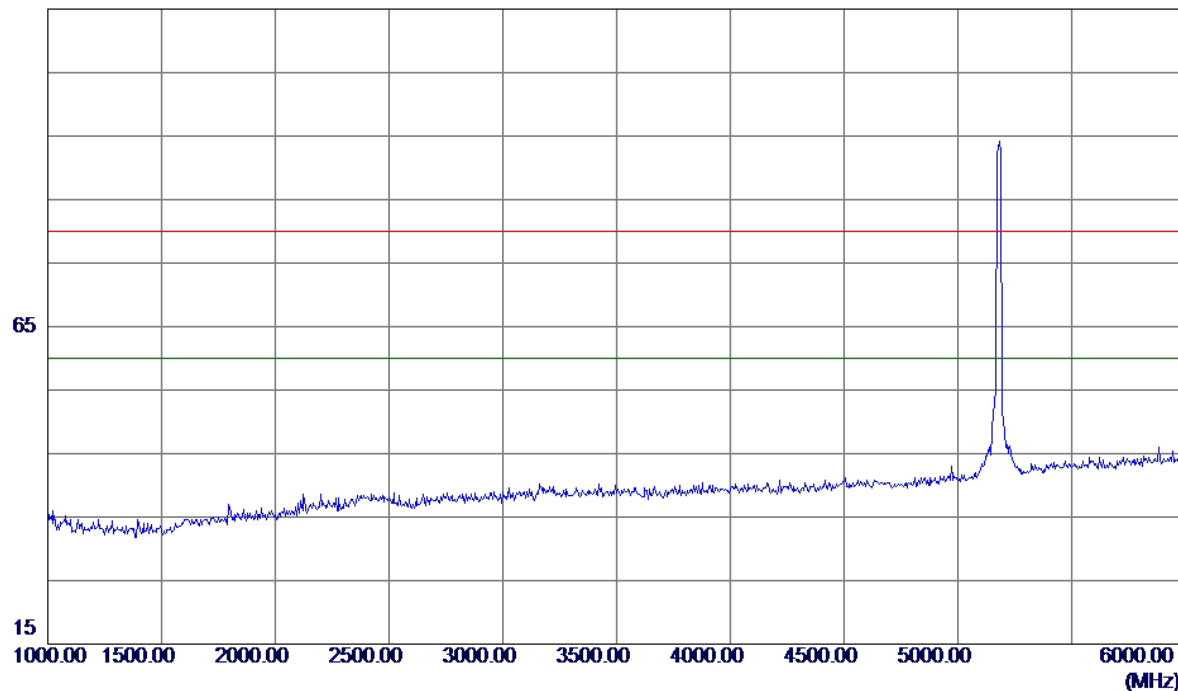


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Vertical

110 dBuV/m

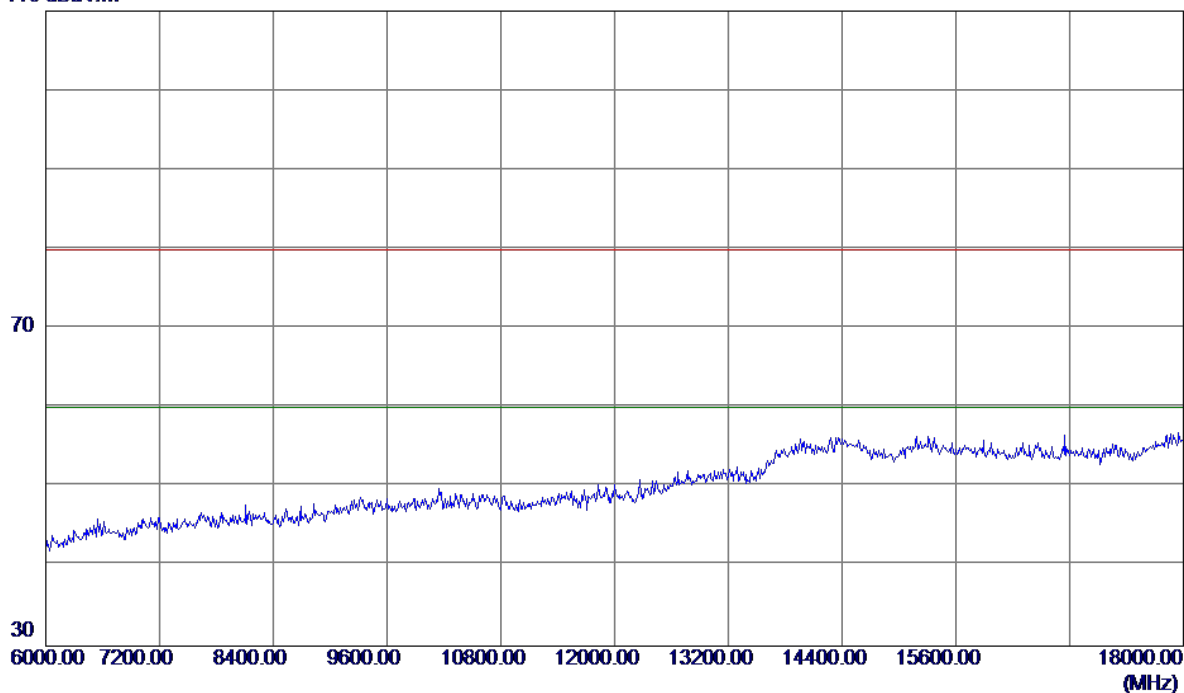

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------


Vertical

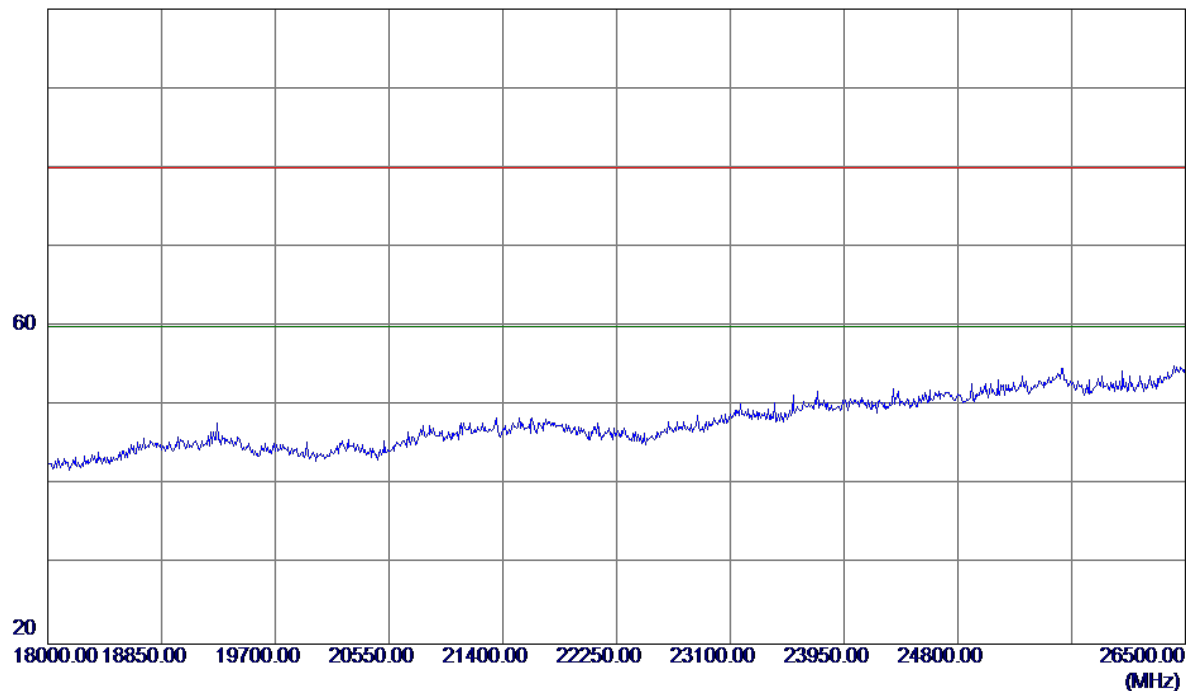Page 264 of 1590

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Vertical

100 dBuV/m

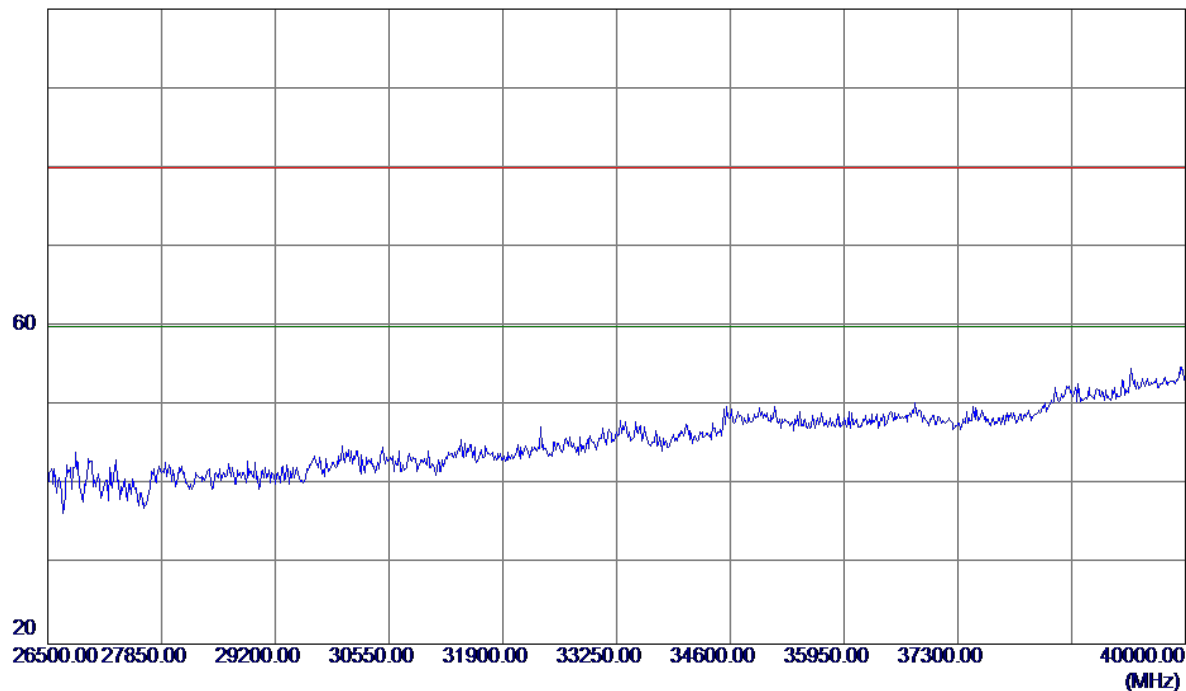


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

125 dBuV/m

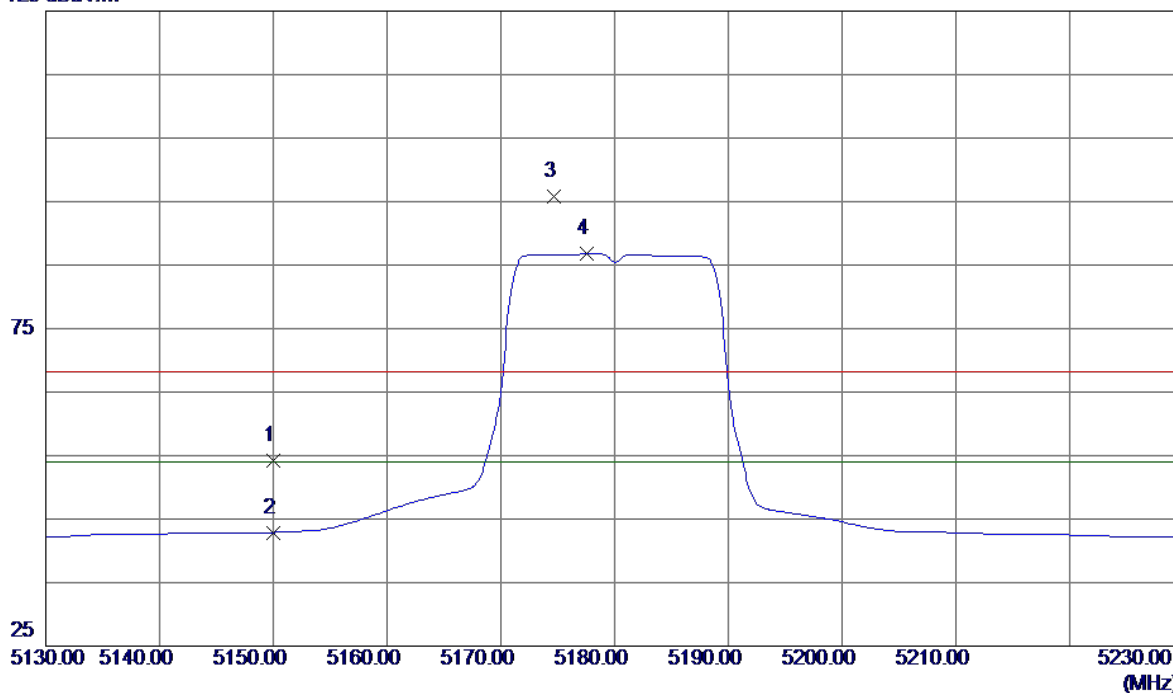


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	13.13	41.10	54.23	68.30	-14.07	Peak	
2	5150.0000	1.78	41.10	42.88	54.00	-11.12	AVG	
3	5174.7000	54.52	41.23	95.75	68.30	27.45	Peak	No Limit
4 *	5177.6000	45.49	41.24	86.73	54.00	32.73	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz

Horizontal

115 dBuV/m

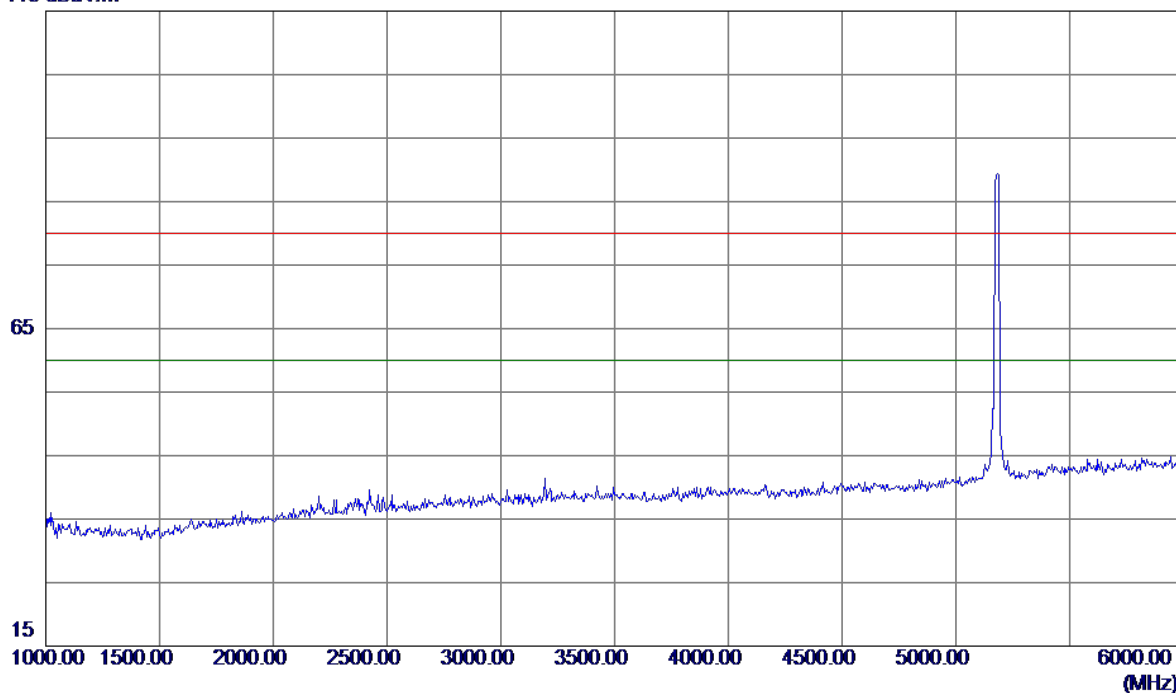


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5180MHz


Horizontal

110 dBuV/m

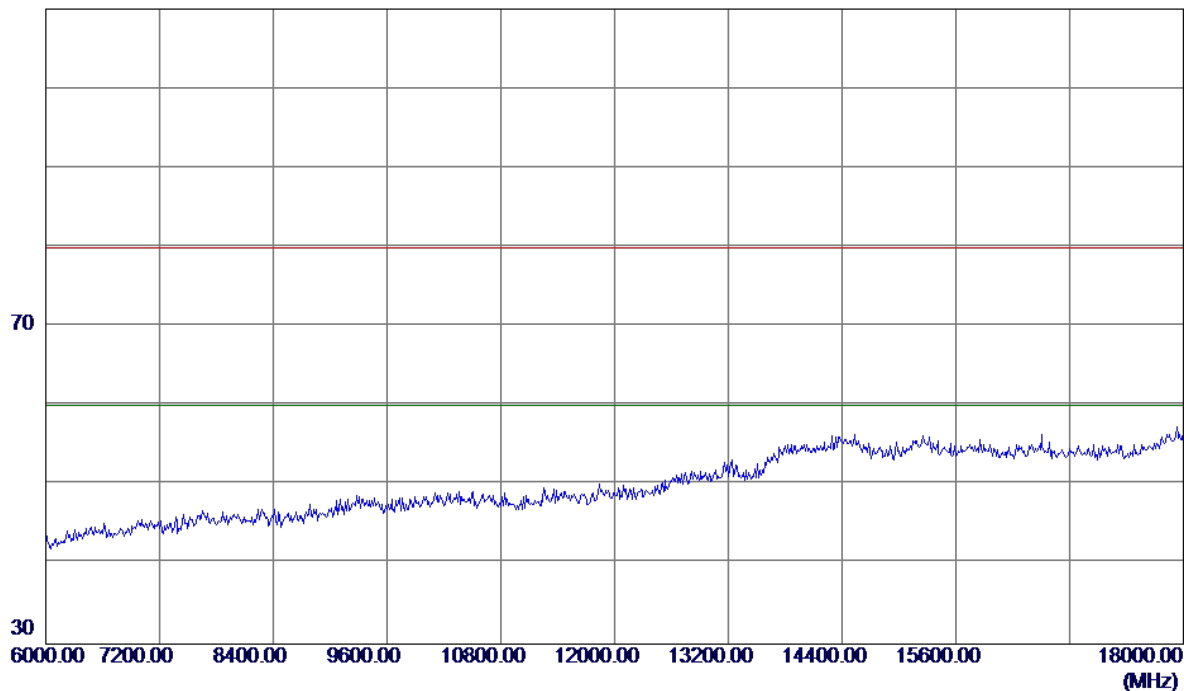


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

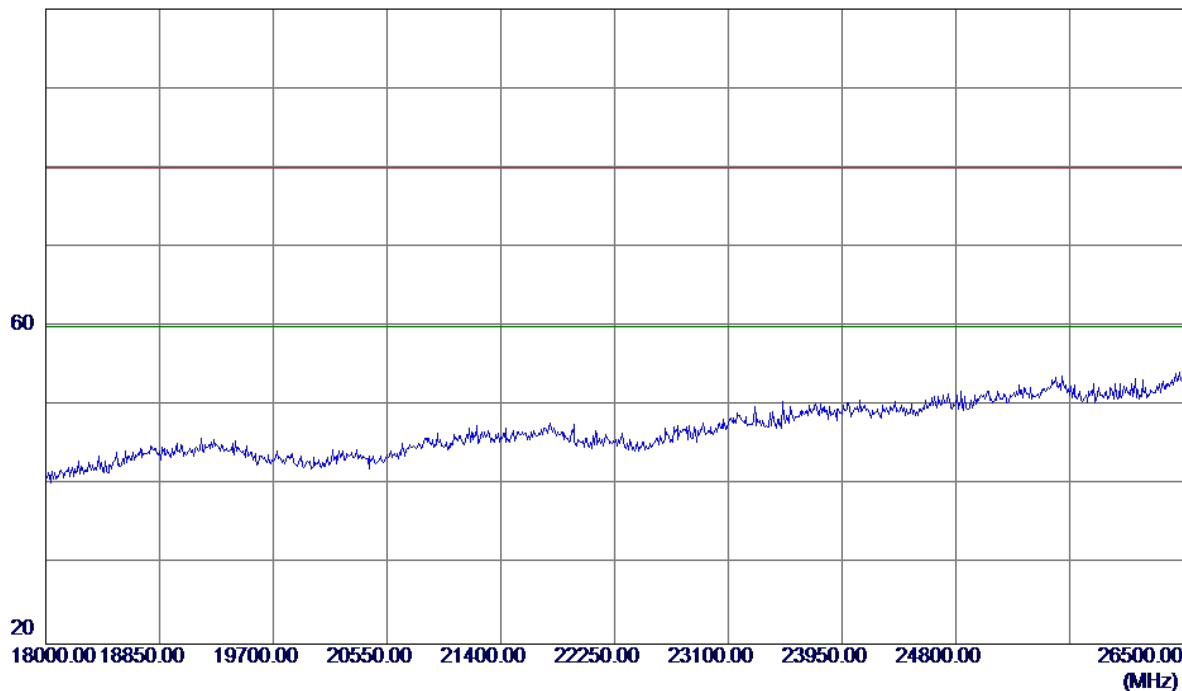

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

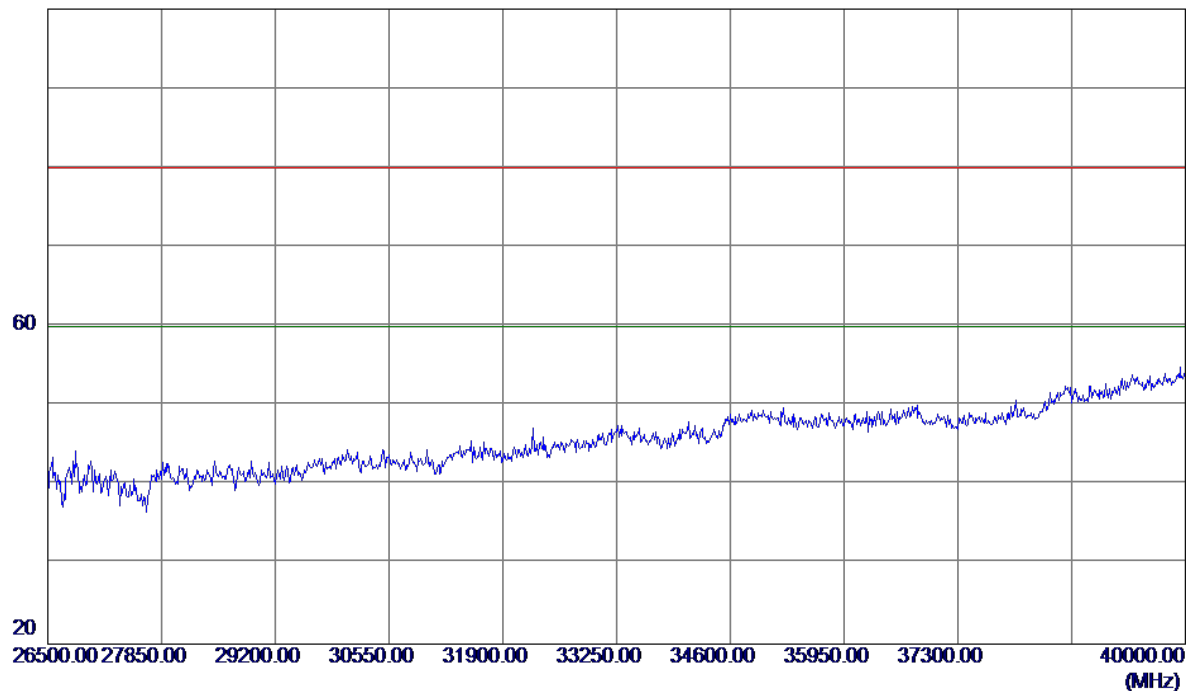


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

125 dBuV/m

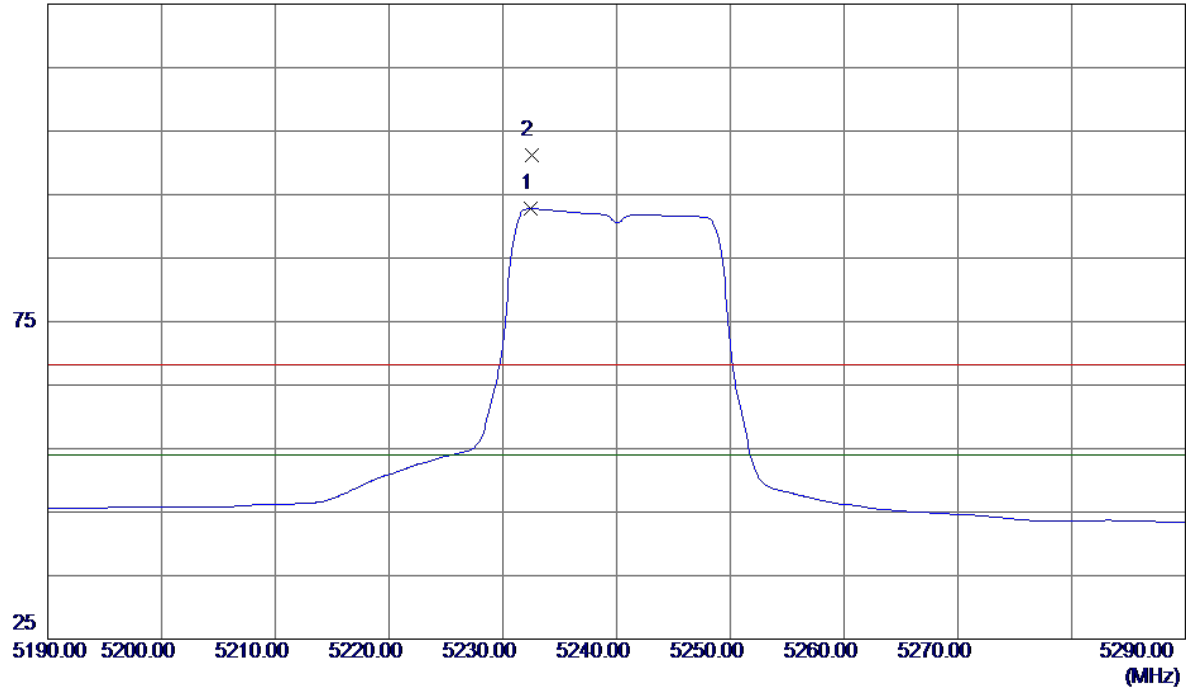


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5232.4000	51.24	41.52	92.76	54.00	38.76	AVG	No Limit
2	5232.5000	59.62	41.52	101.14	68.30	32.84	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Vertical

115 dBuV/m

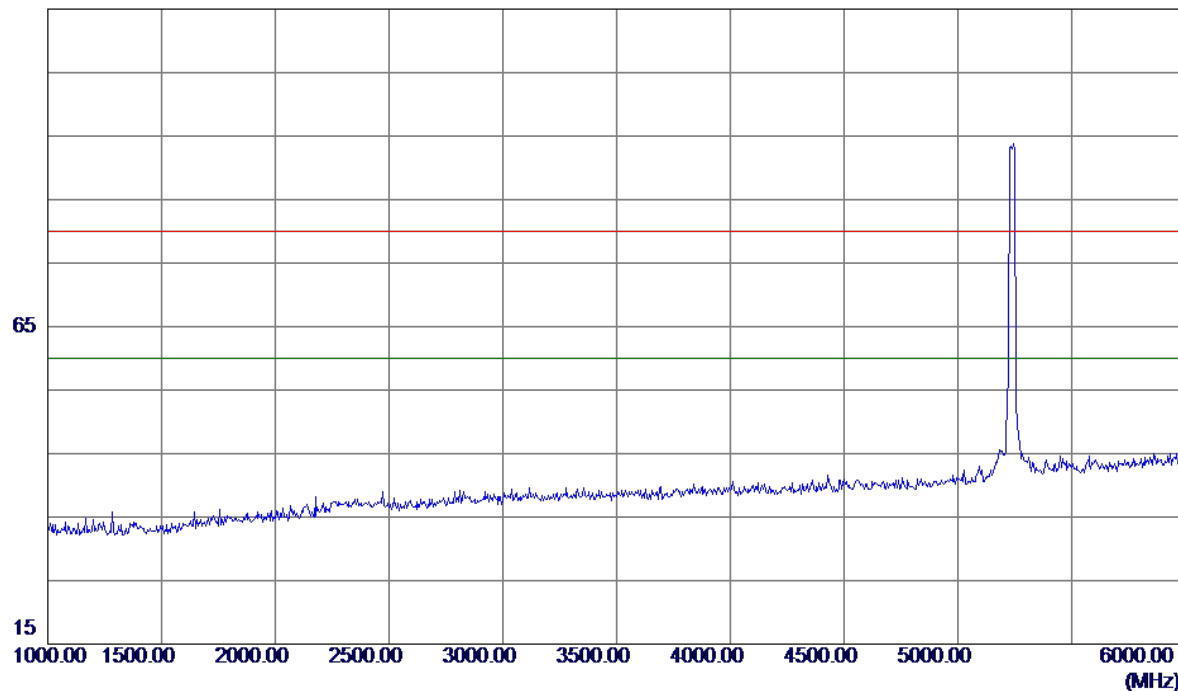


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Vertical

110 dBuV/m

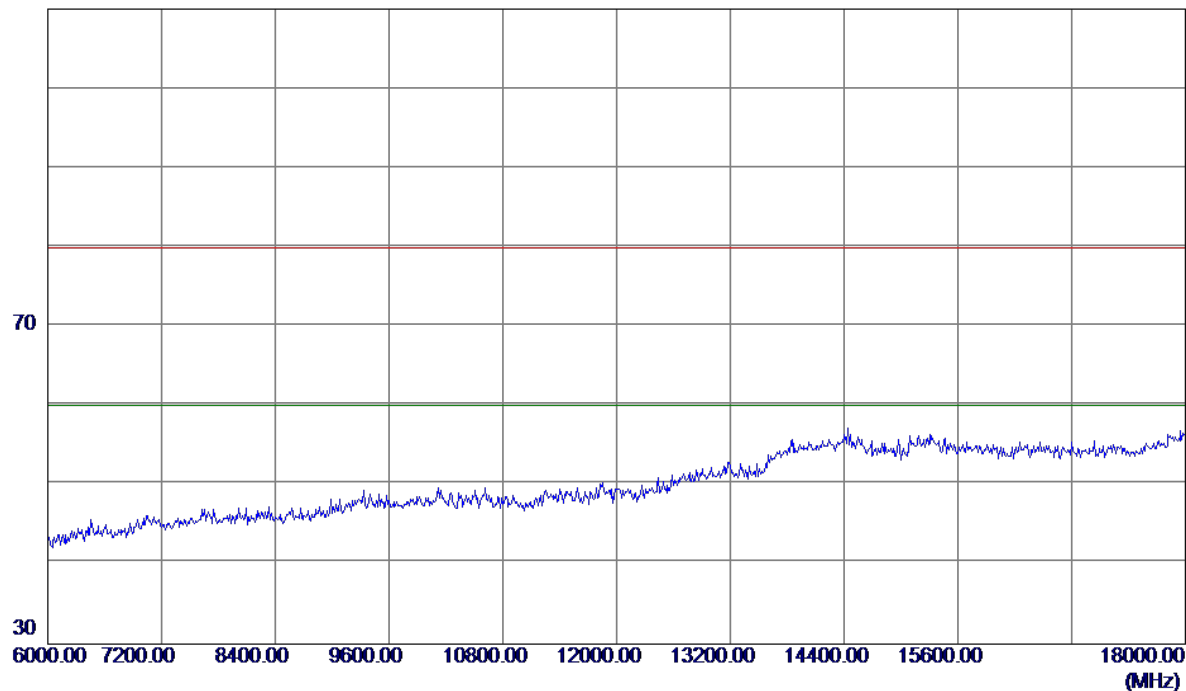


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Vertical

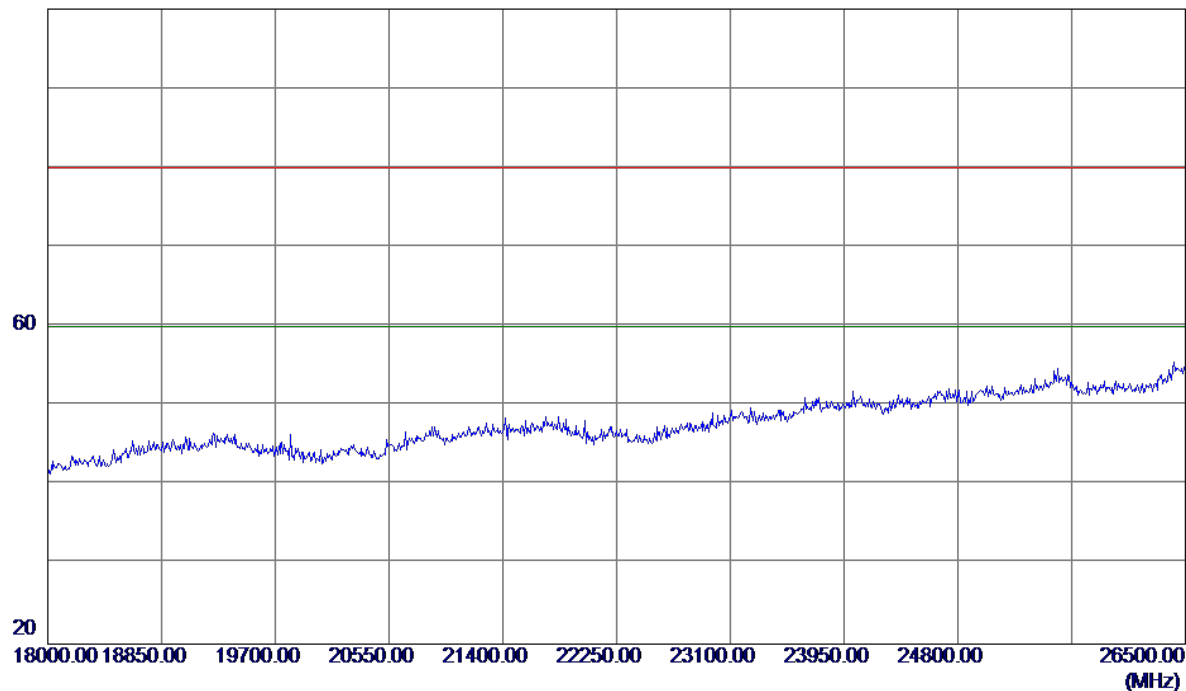

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Vertical

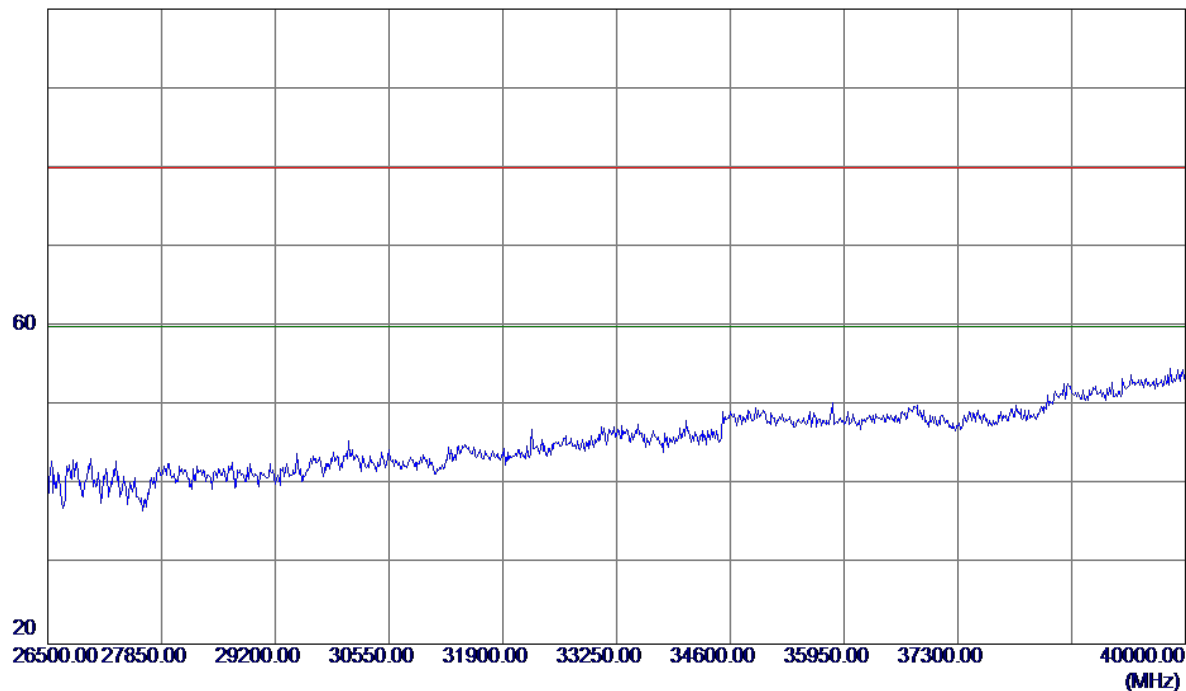


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz


Horizontal

125 dBuV/m

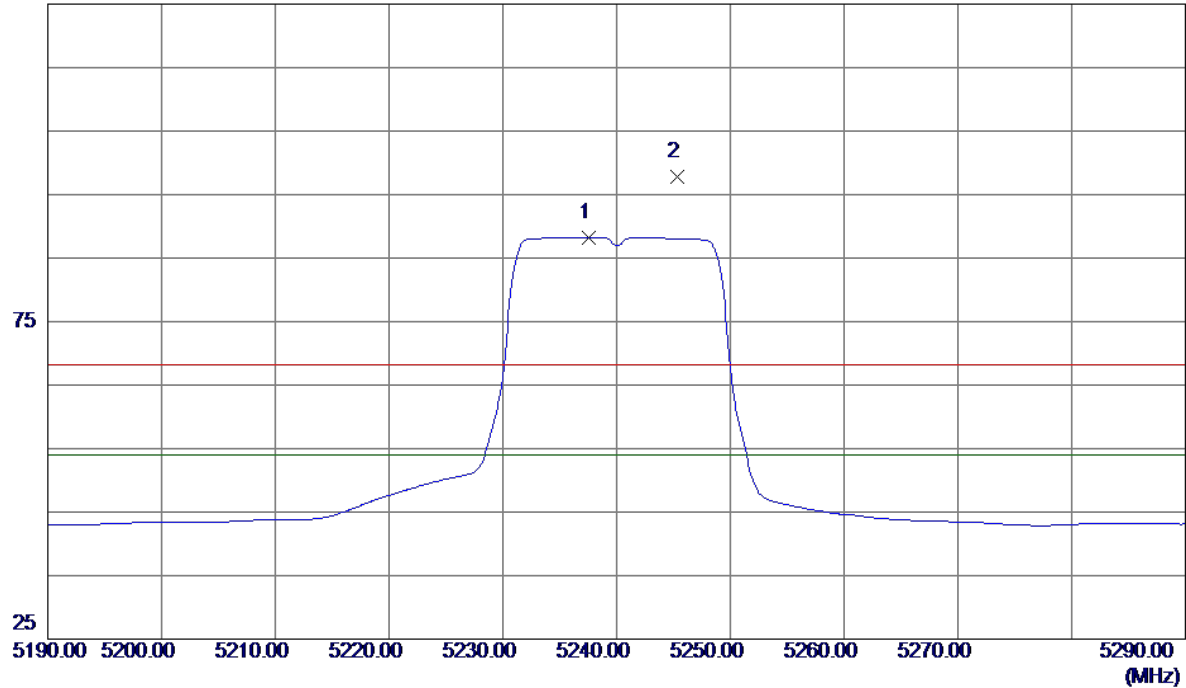

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5237.6000	46.72	41.55	88.27	54.00	34.27	AVG	No Limit
2	5245.3000	56.14	41.59	97.73	68.30	29.43	Peak	No Limit


Horizontal

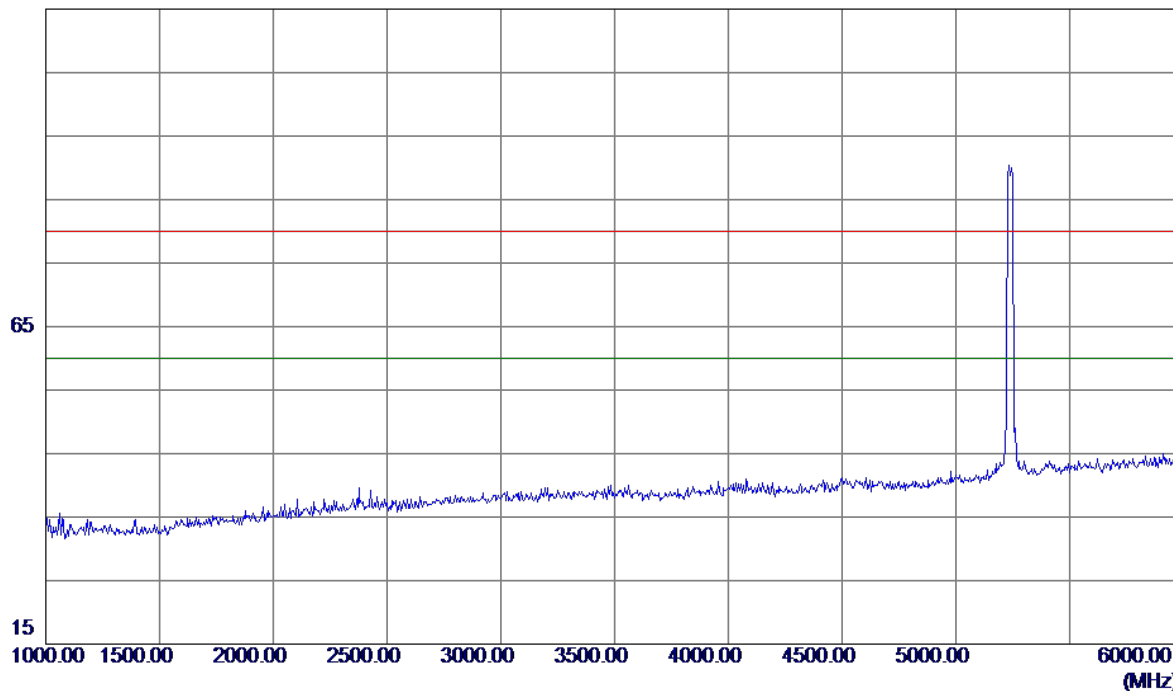

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

110 dBuV/m

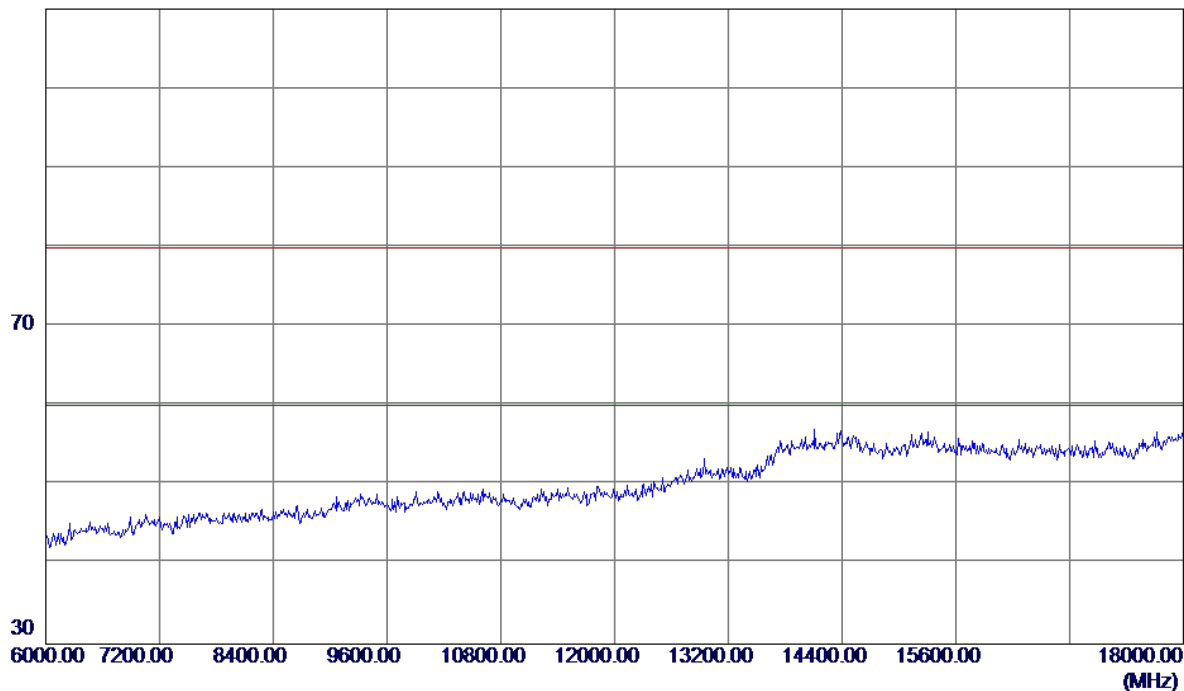


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N20 Mode 5240MHz

Horizontal

100 dBuV/m

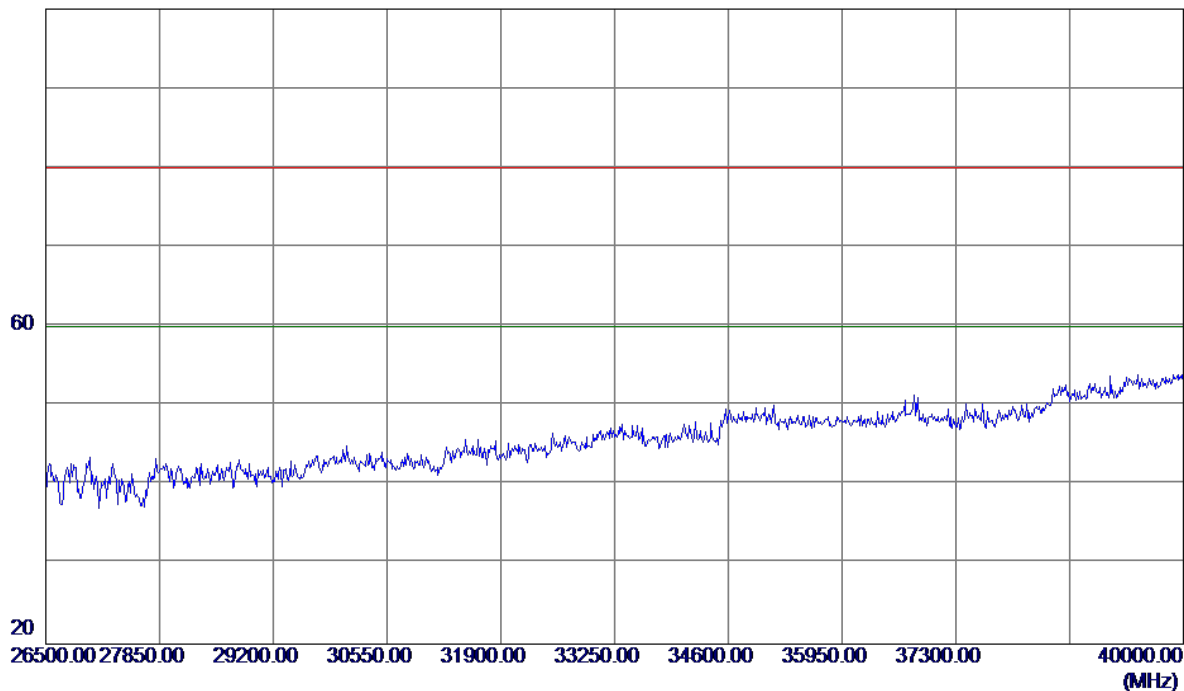


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

125 dBuV/m

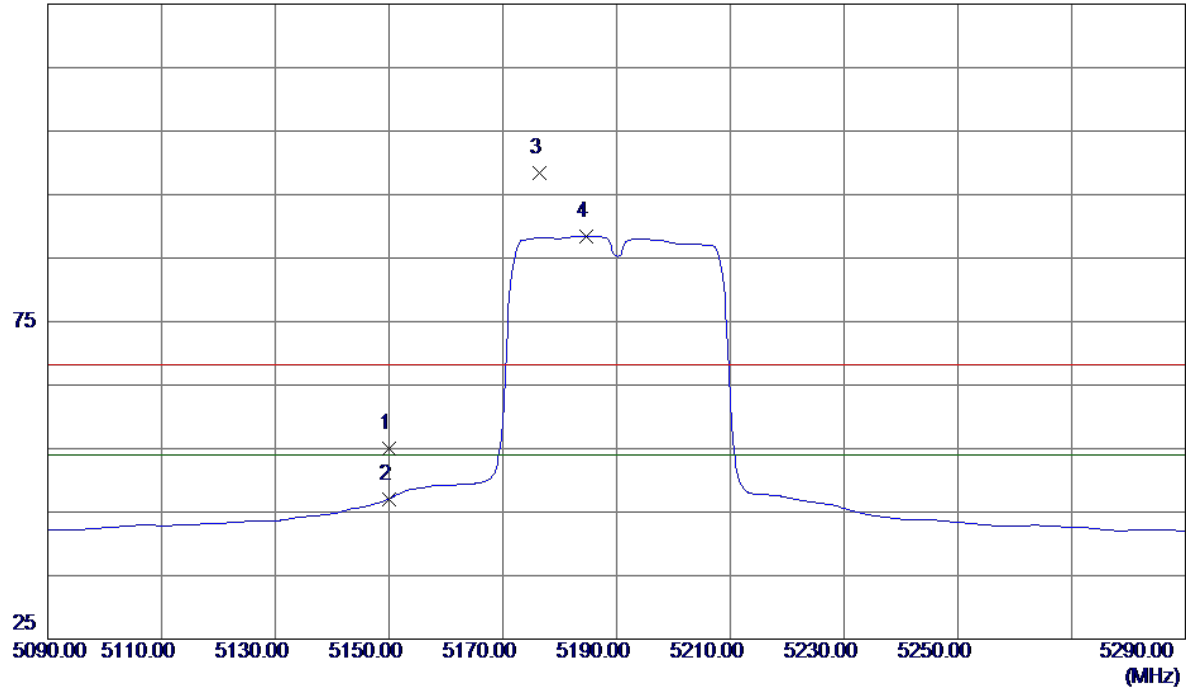


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	13.90	41.10	55.00	68.30	-13.30	Peak	
2	5150.0000	5.99	41.10	47.09	54.00	-6.91	AVG	
3	5176.4000	57.20	41.24	98.44	68.30	30.14	Peak	No Limit
4 *	5184.6000	47.13	41.28	88.41	54.00	34.41	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

115 dBuV/m

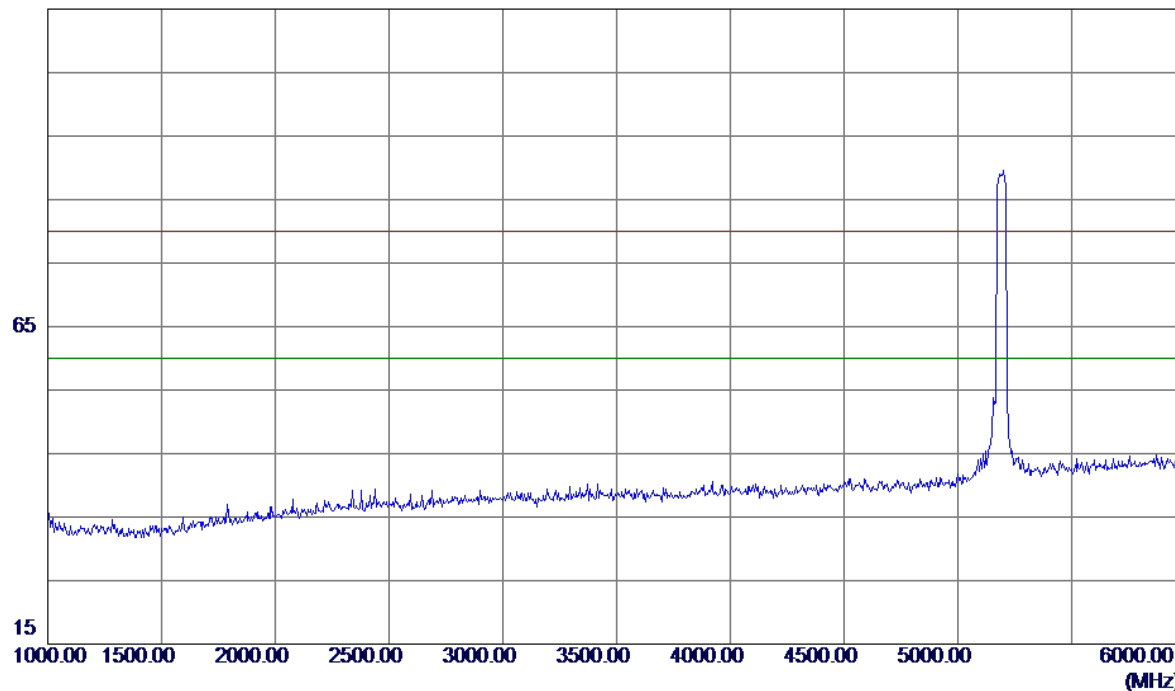


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Vertical

110 dBuV/m

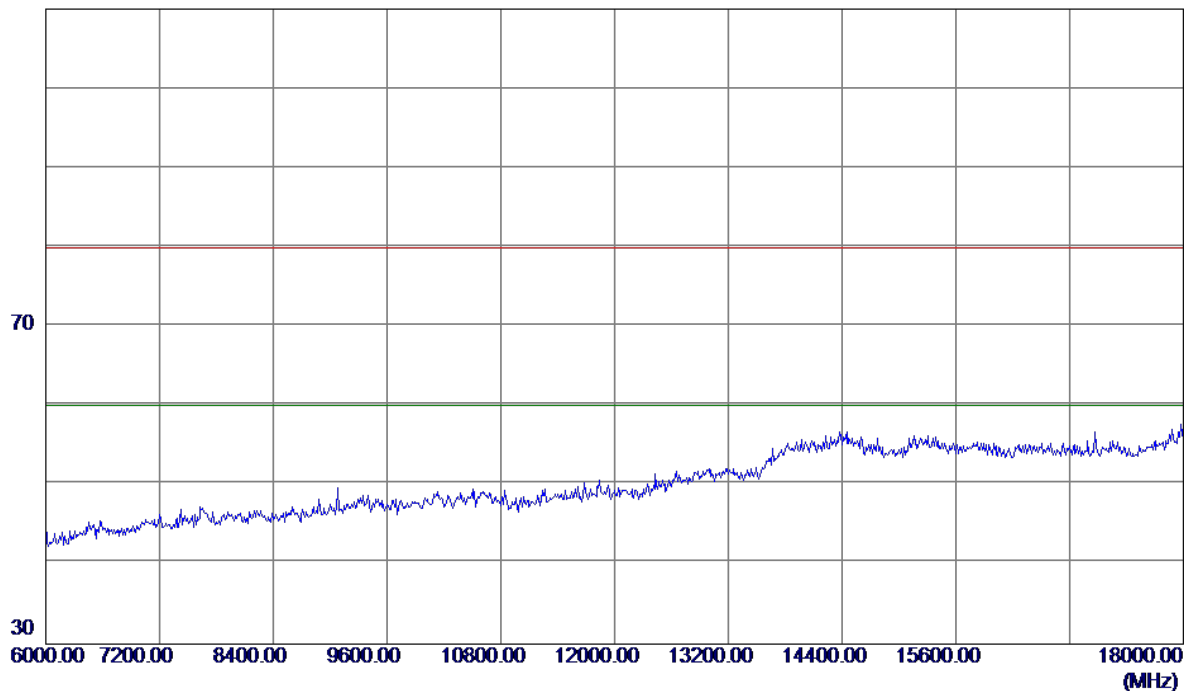

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		


Vertical

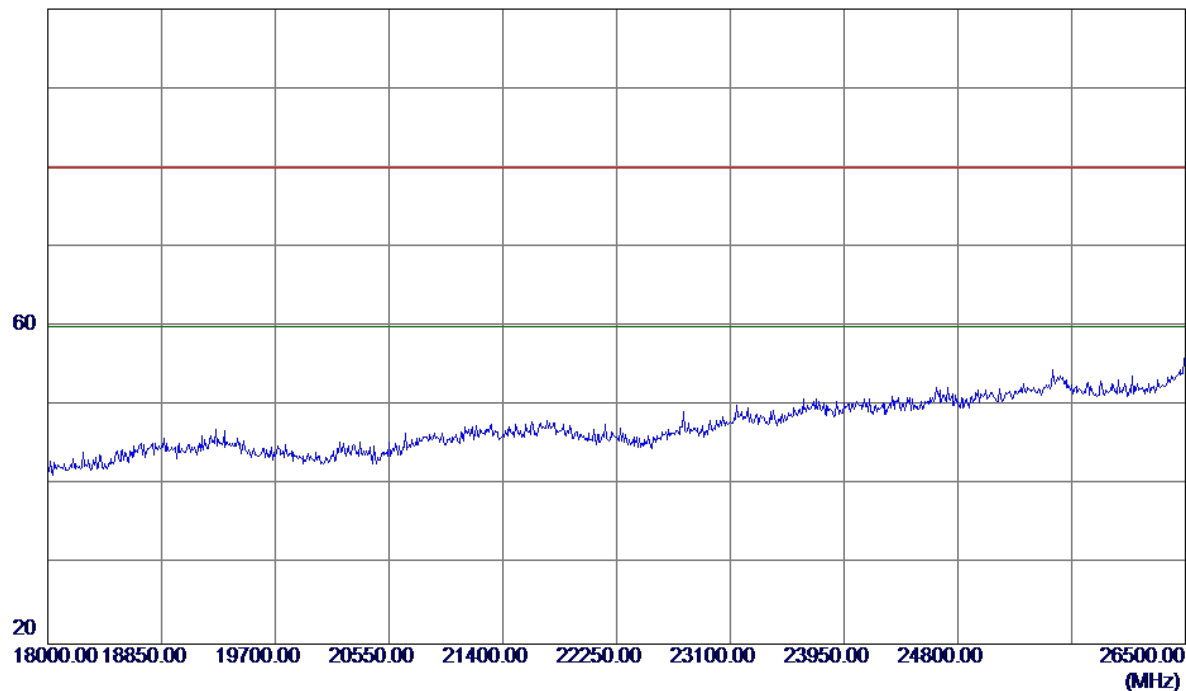Page 284 of 1590

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz

Vertical

100 dBuV/m

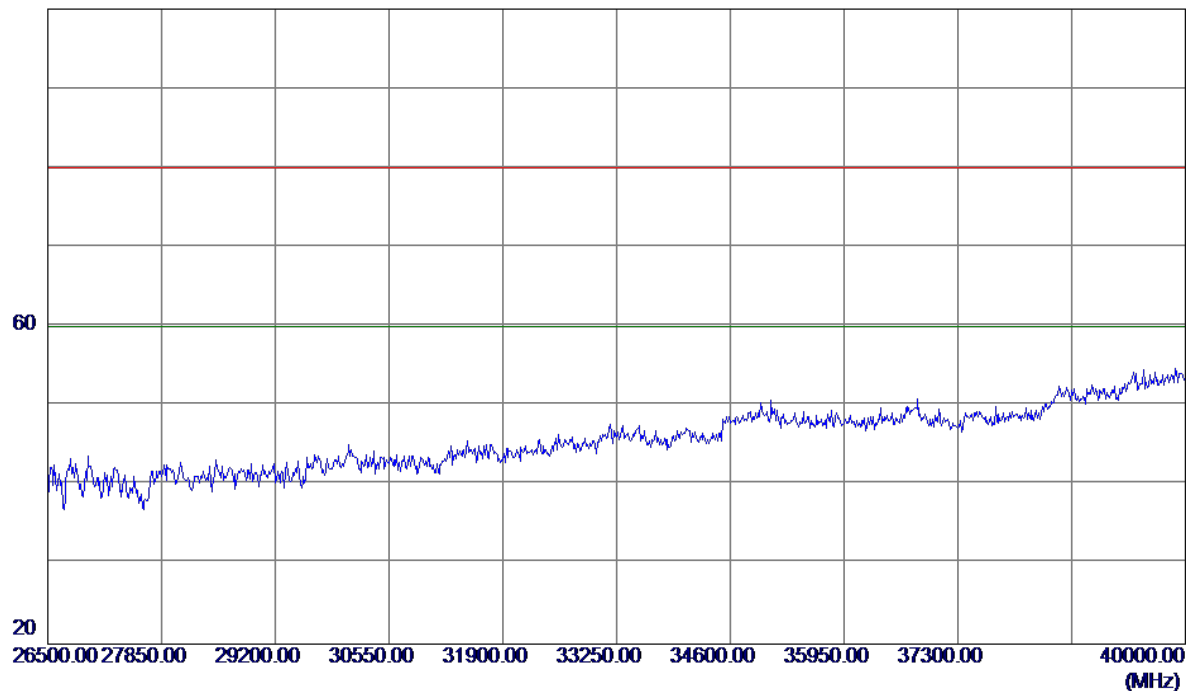


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

125 dBuV/m

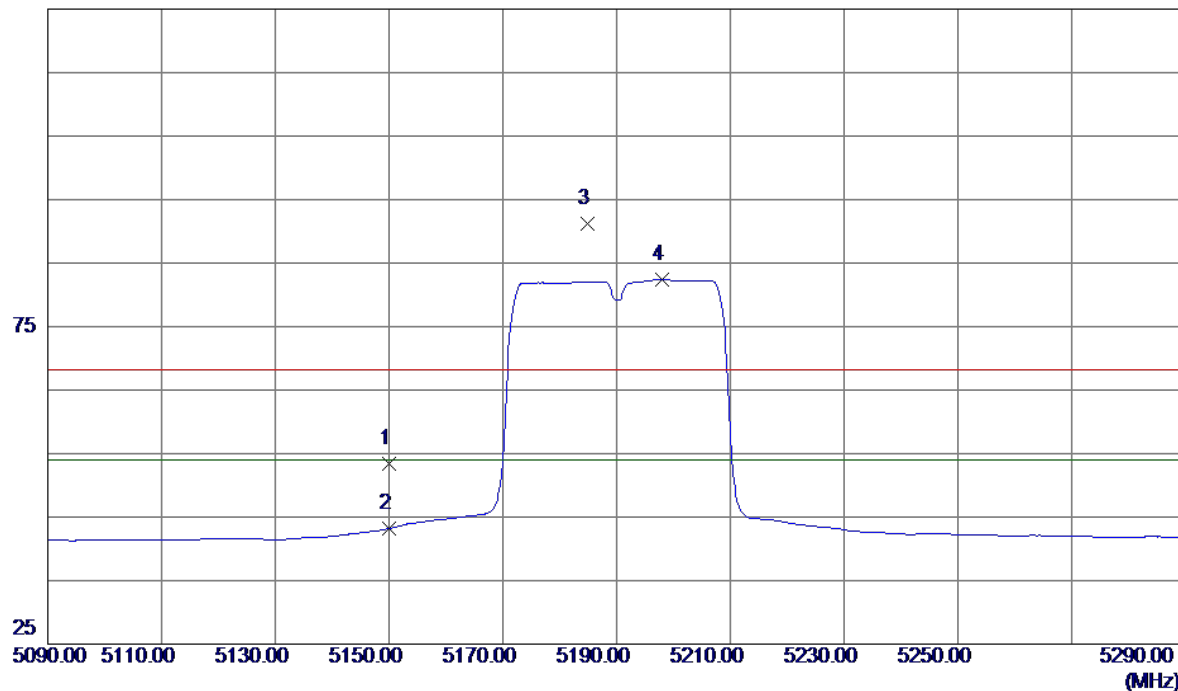

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	12.27	41.10	53.37	68.30	-14.93	Peak	
2	5150.0000	2.10	41.10	43.20	54.00	-10.80	AVG	
3	5184.8000	49.86	41.28	91.14	68.30	22.84	Peak	No Limit
4 *	5198.0000	41.05	41.35	82.40	54.00	28.40	AVG	No Limit


Horizontal

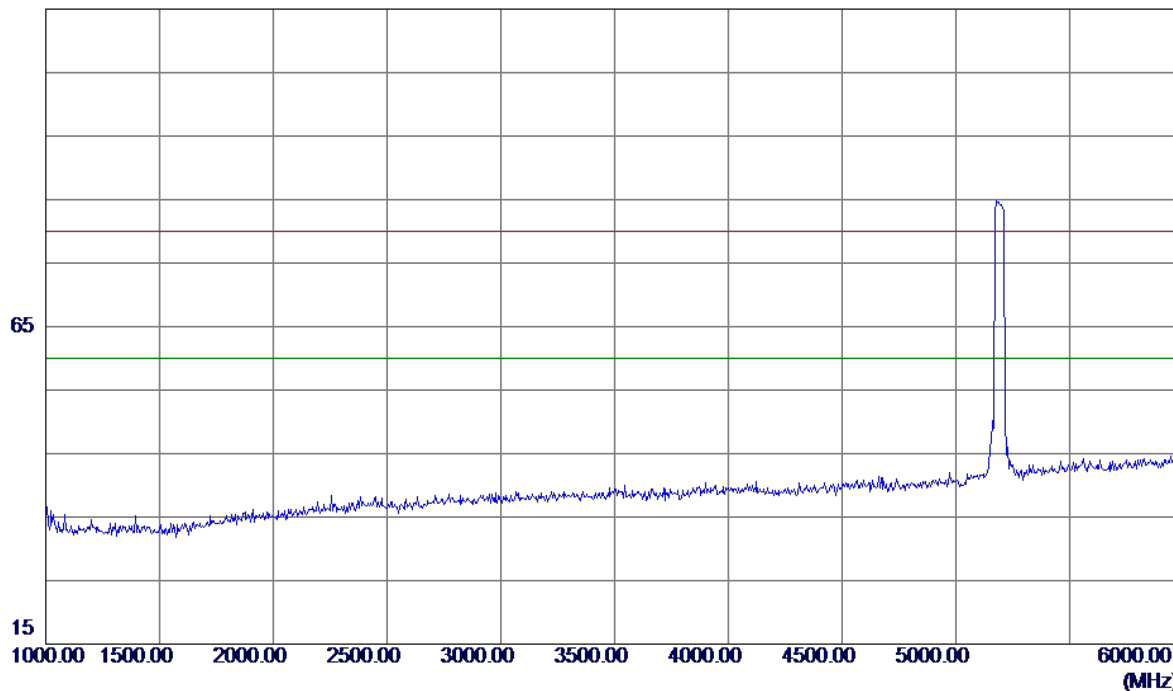

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5190MHz


Horizontal

110 dBuV/m

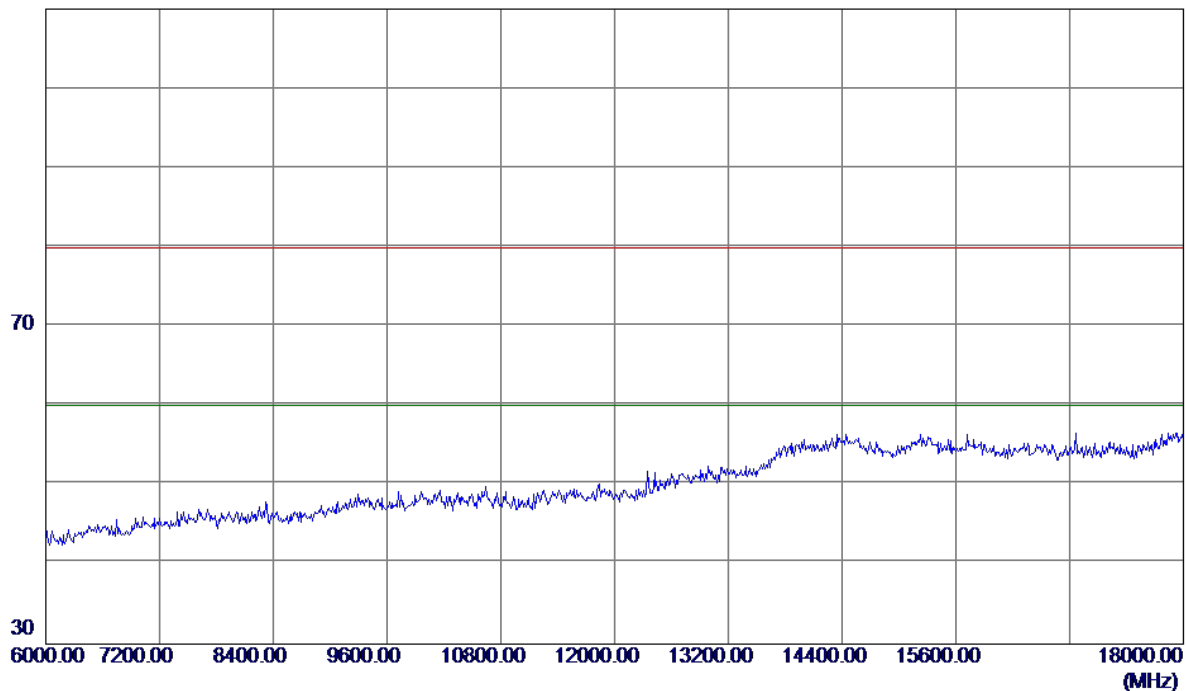


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

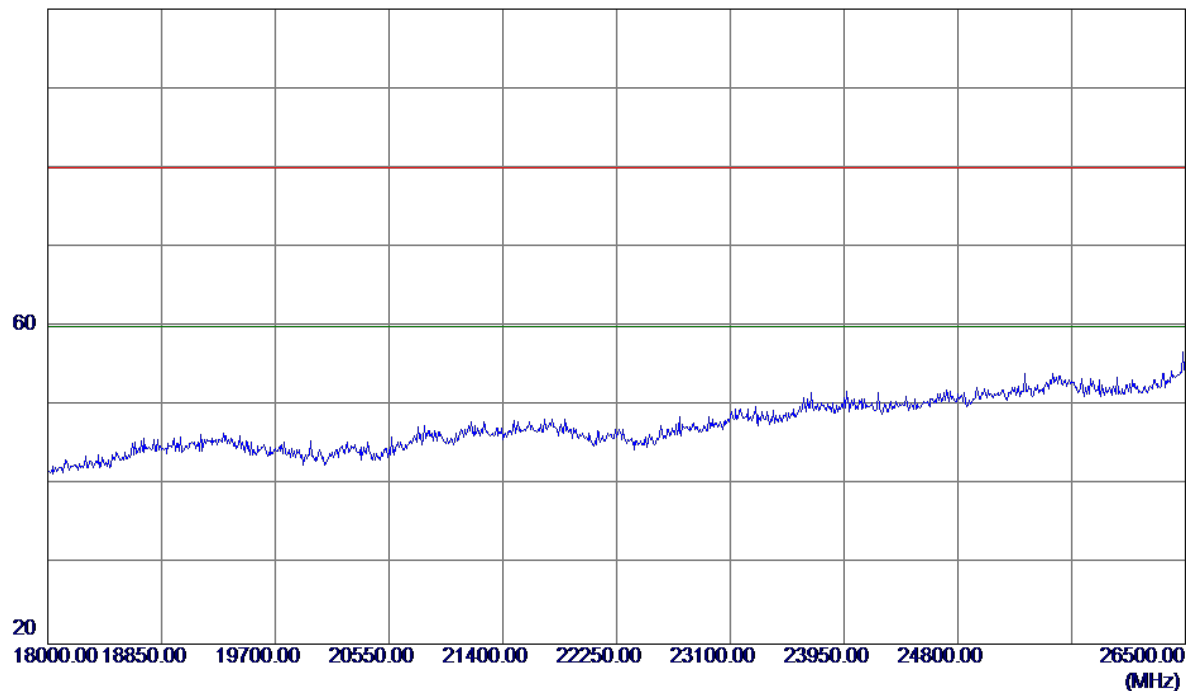Page 289 of 1590


Horizontal

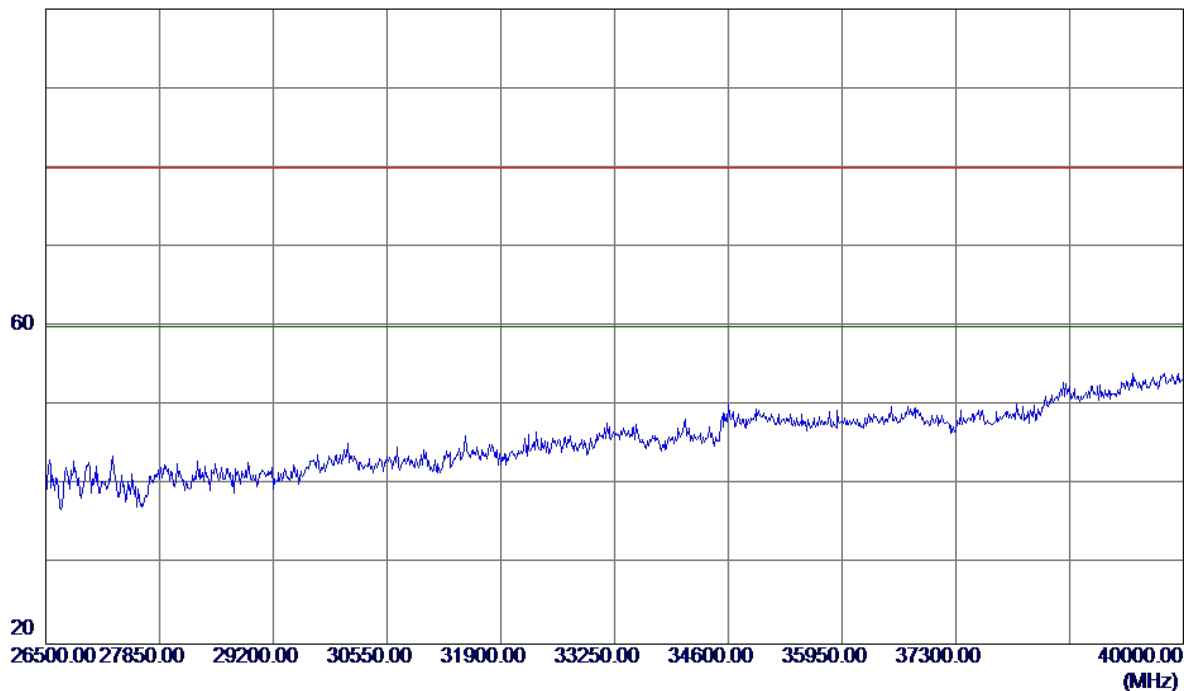

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

125 dBuV/m

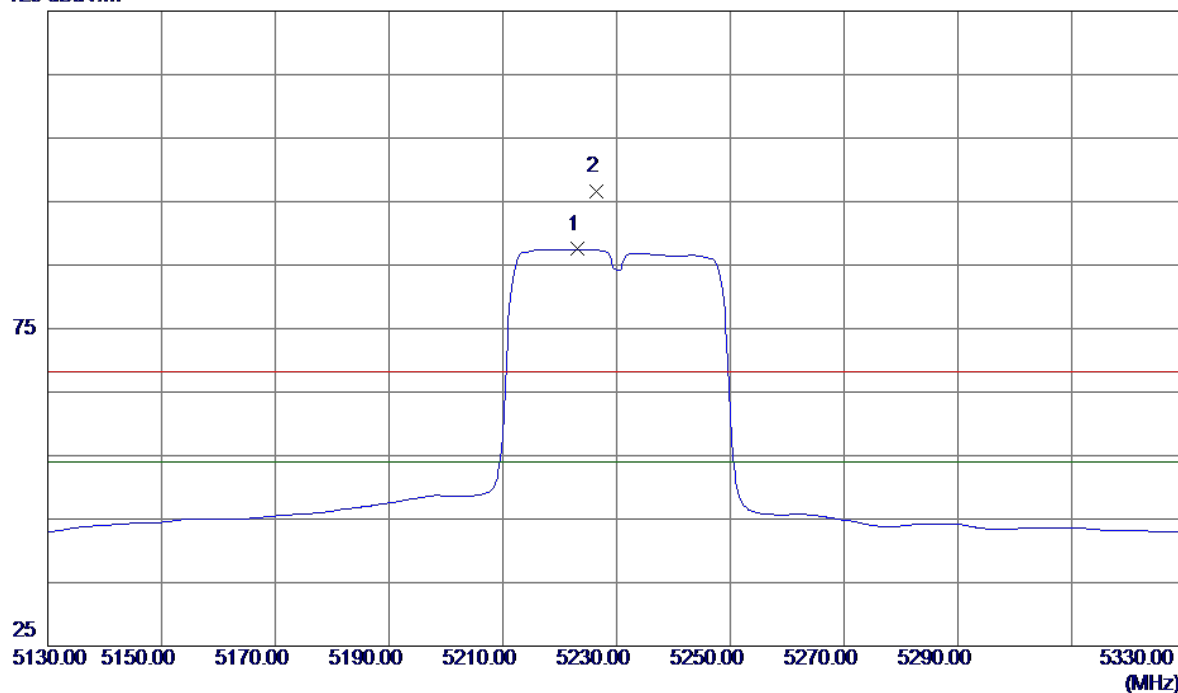


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5223.2000	46.03	41.47	87.50	54.00	33.50	AVG	No Limit
2	5226.4000	55.06	41.49	96.55	68.30	28.25	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Vertical

115 dBuV/m

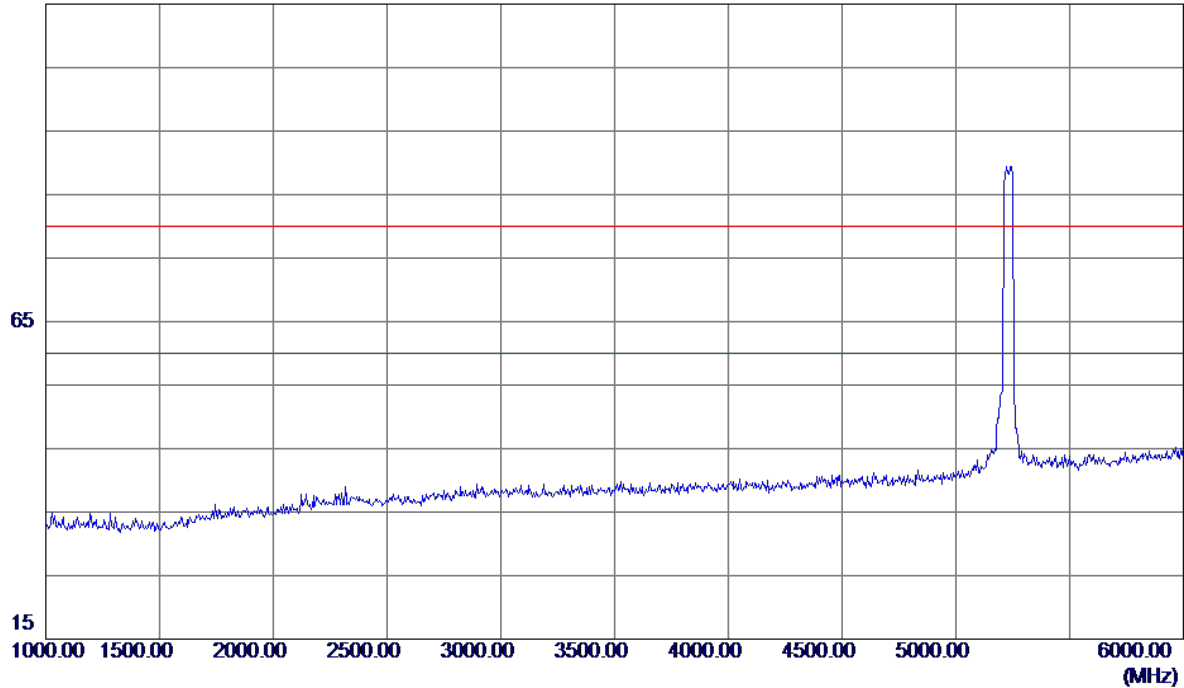


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz


Vertical

110 dBuV/m

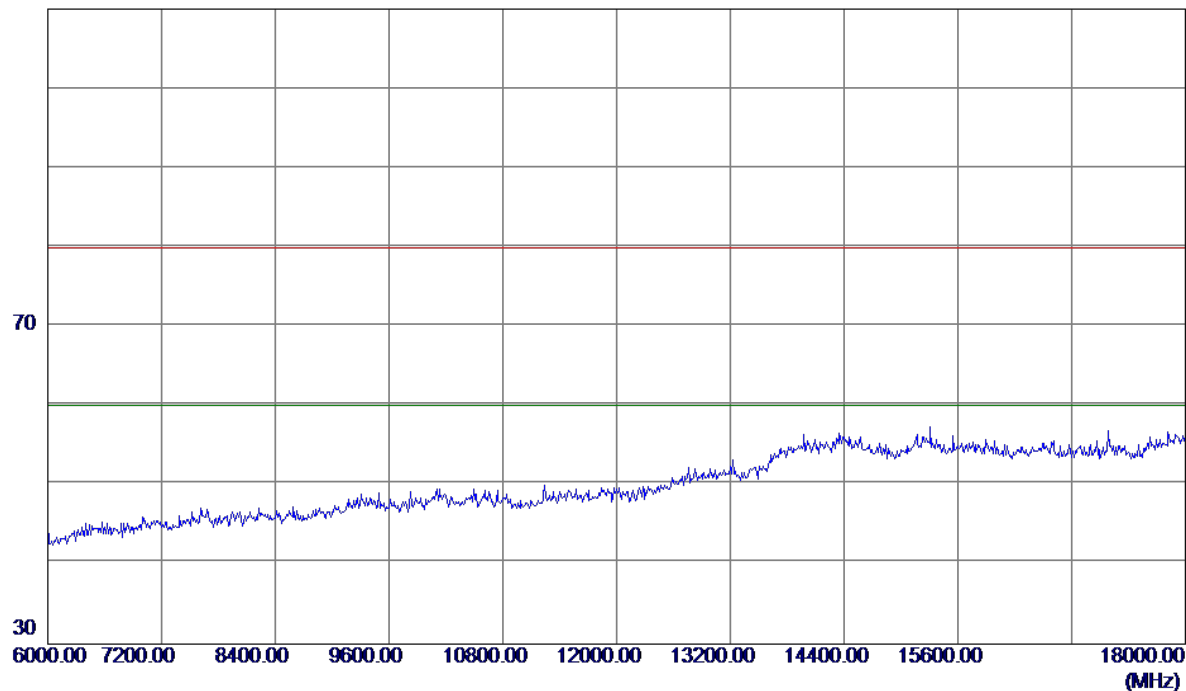


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Vertical

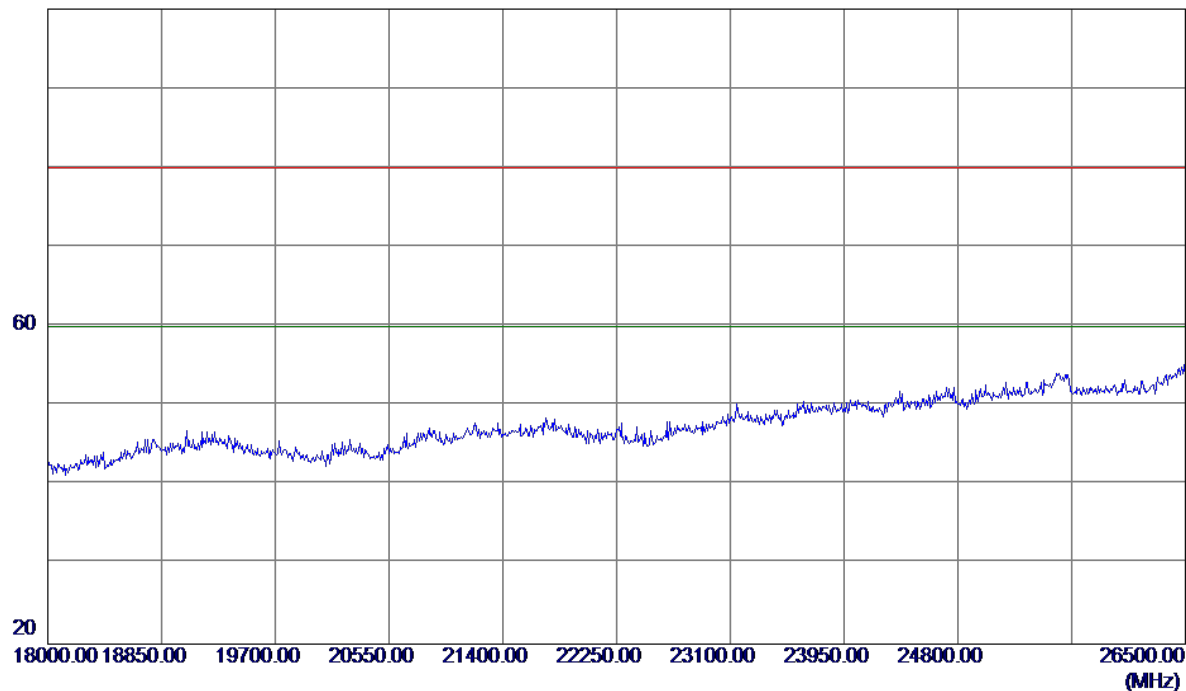

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Vertical

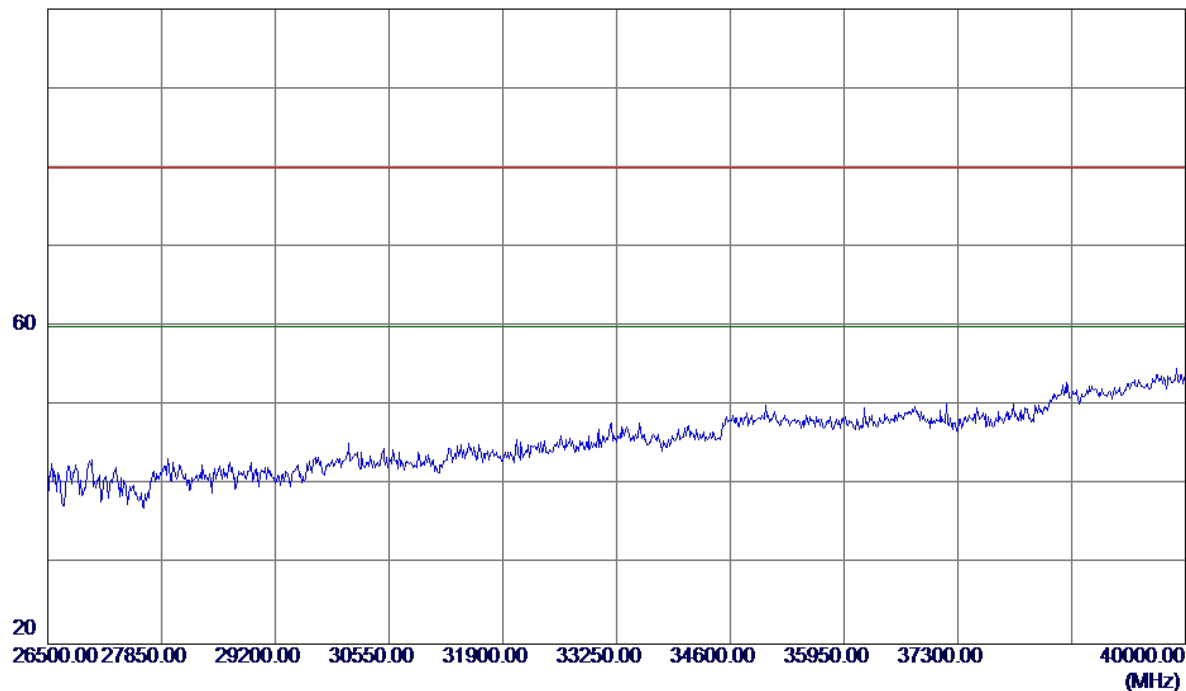


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

125 dBuV/m

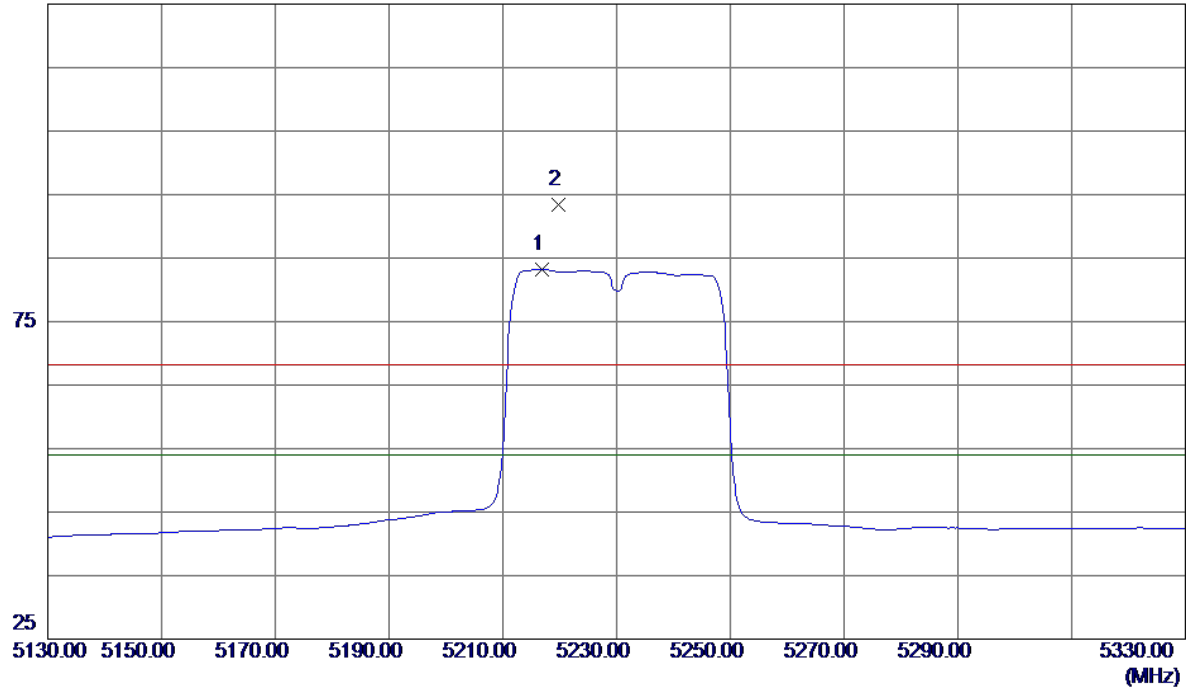


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5216.8000	41.75	41.44	83.19	54.00	29.19	AVG	No Limit
2	5219.8000	52.00	41.46	93.46	68.30	25.16	Peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

115 dBuV/m

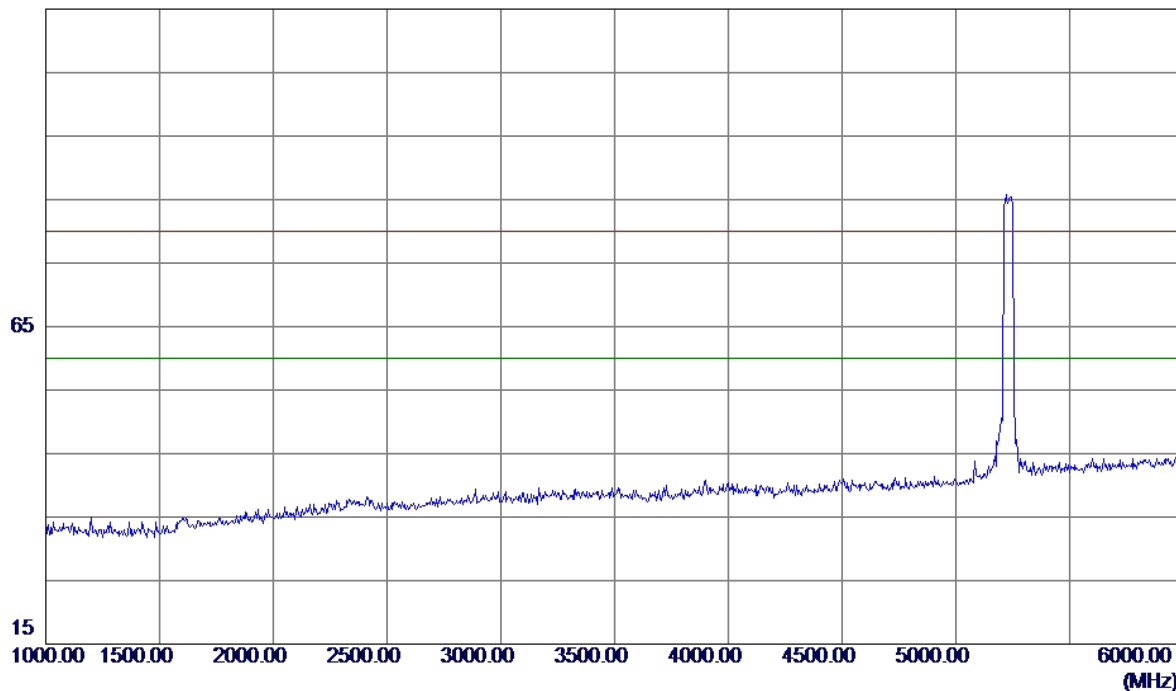


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal

110 dBuV/m

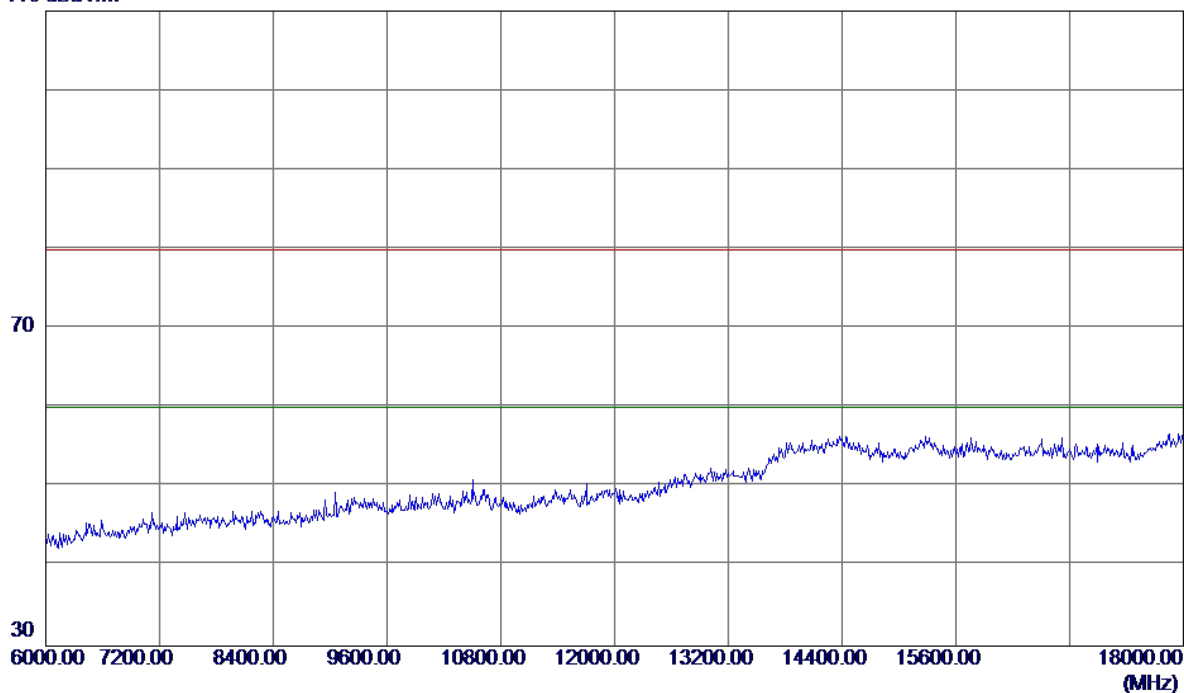


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis:	X
Test Mode:	UNII-1/ TX N40 Mode 5230MHz

Horizontal


100 dBuV/m

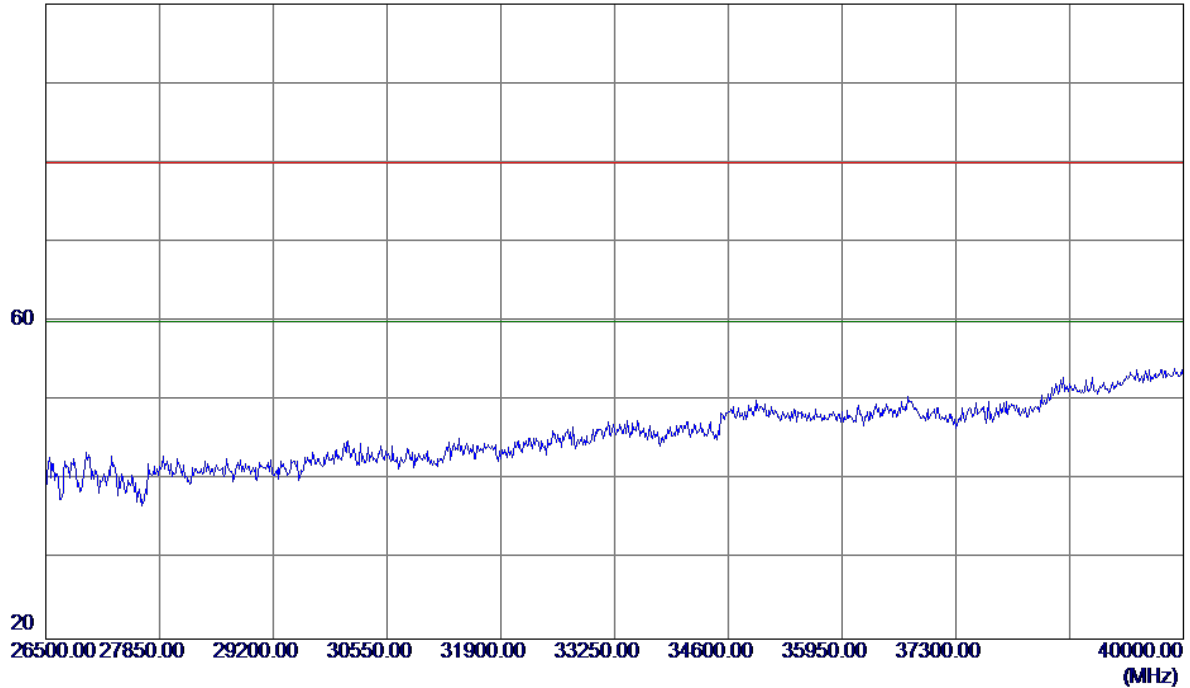

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

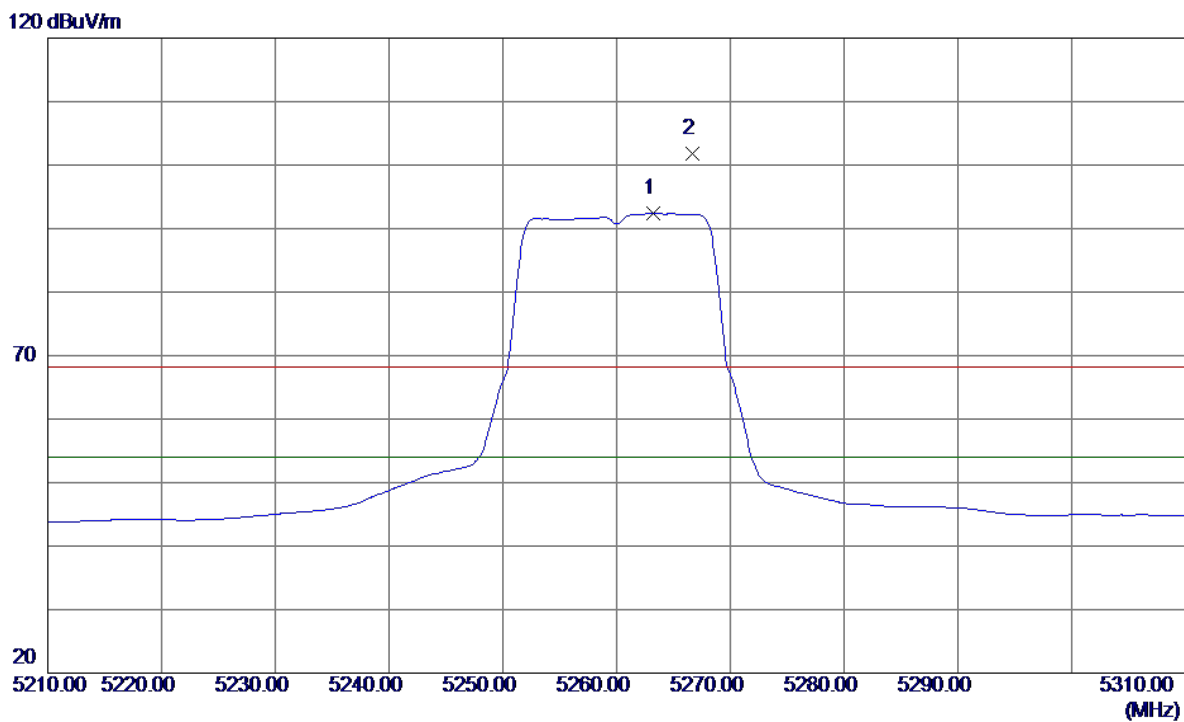


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5263.2000	50.67	41.68	92.35	54.00	38.35	AVG	No Limit
2	5266.7000	60.10	41.69	101.79	68.30	33.49	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz

Vertical

115 dBuV/m

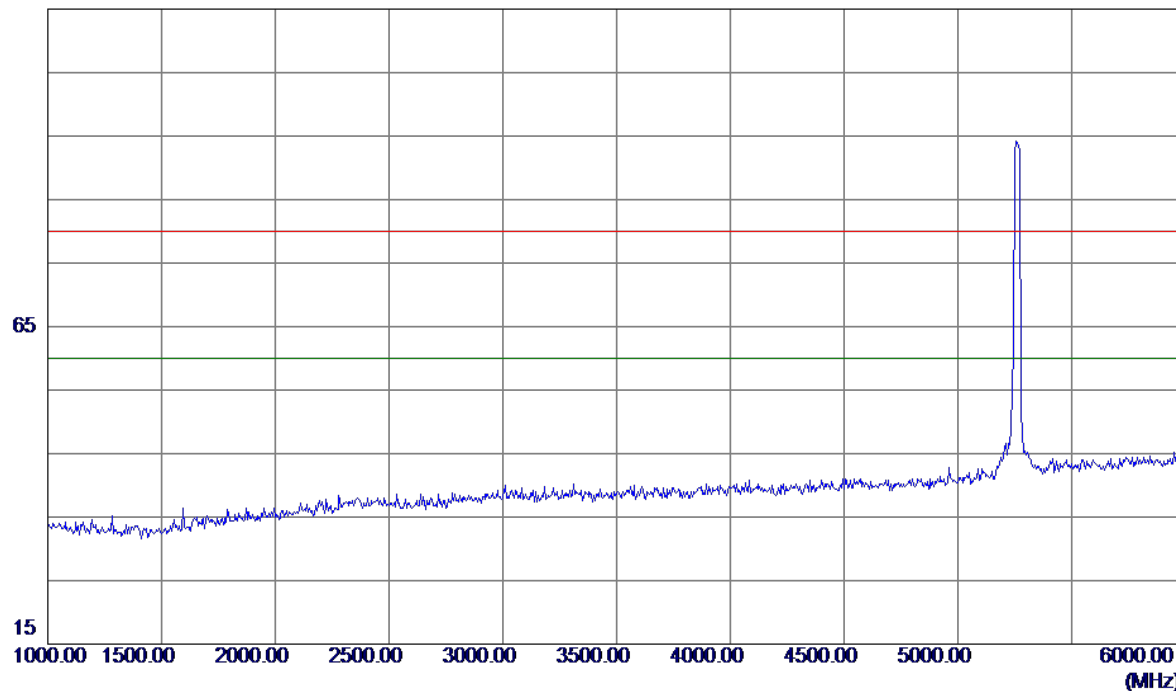


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Vertical

110 dBuV/m

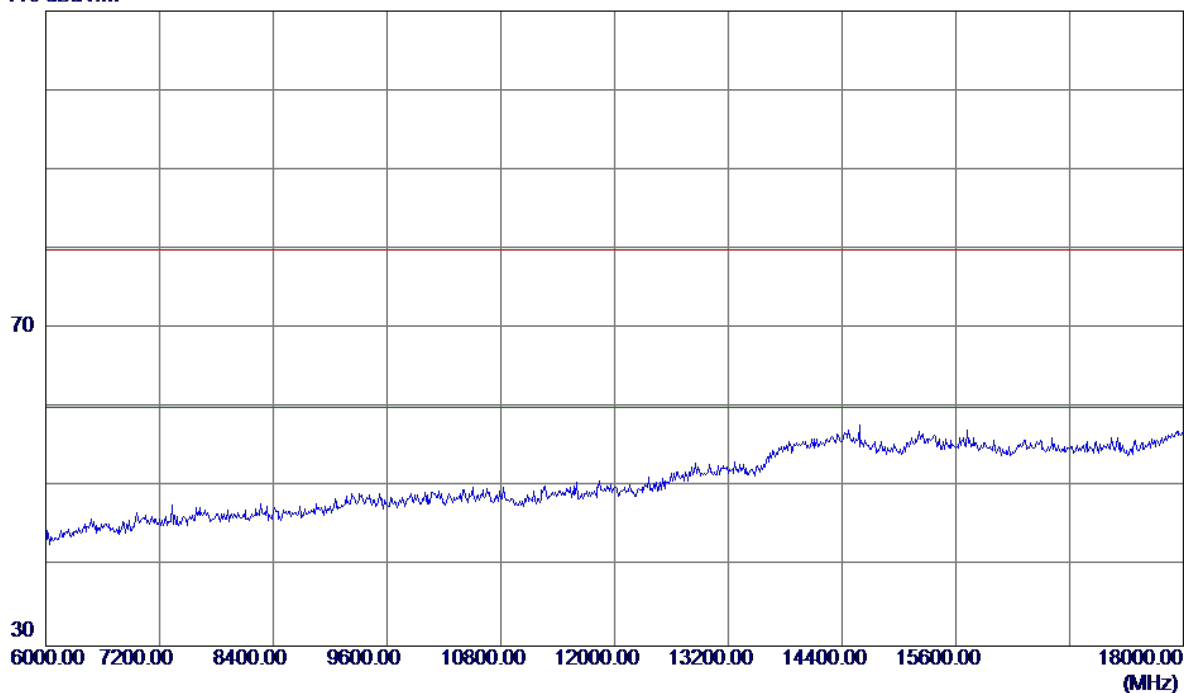


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Vertical

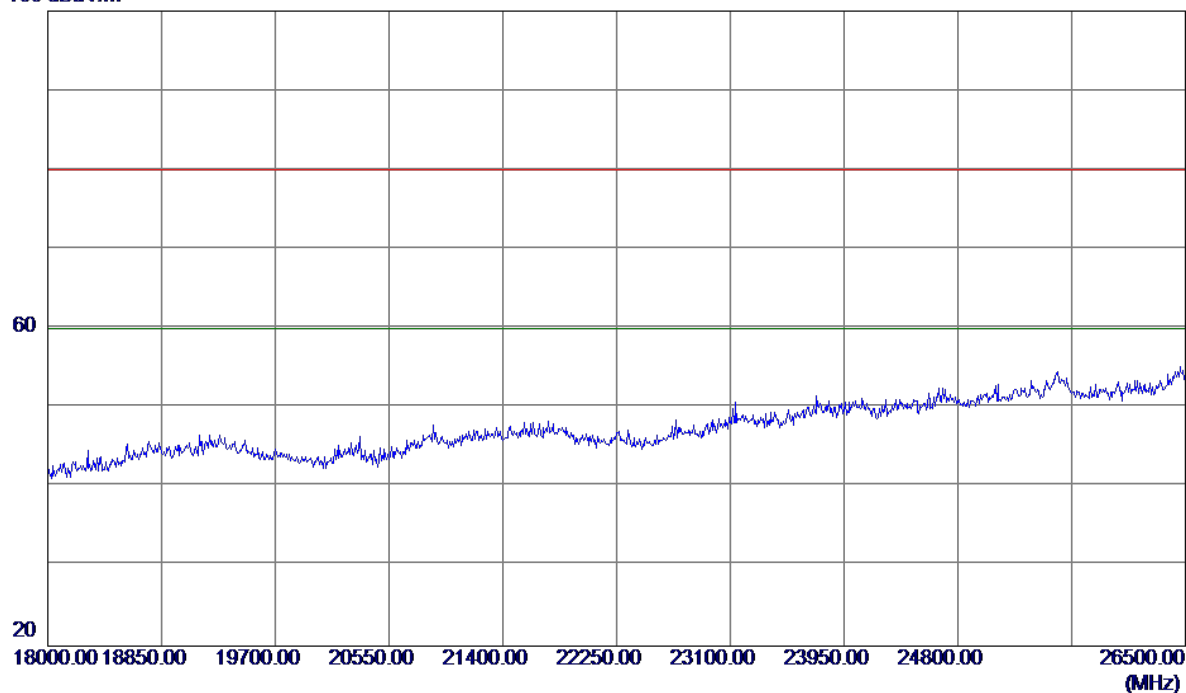

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Vertical

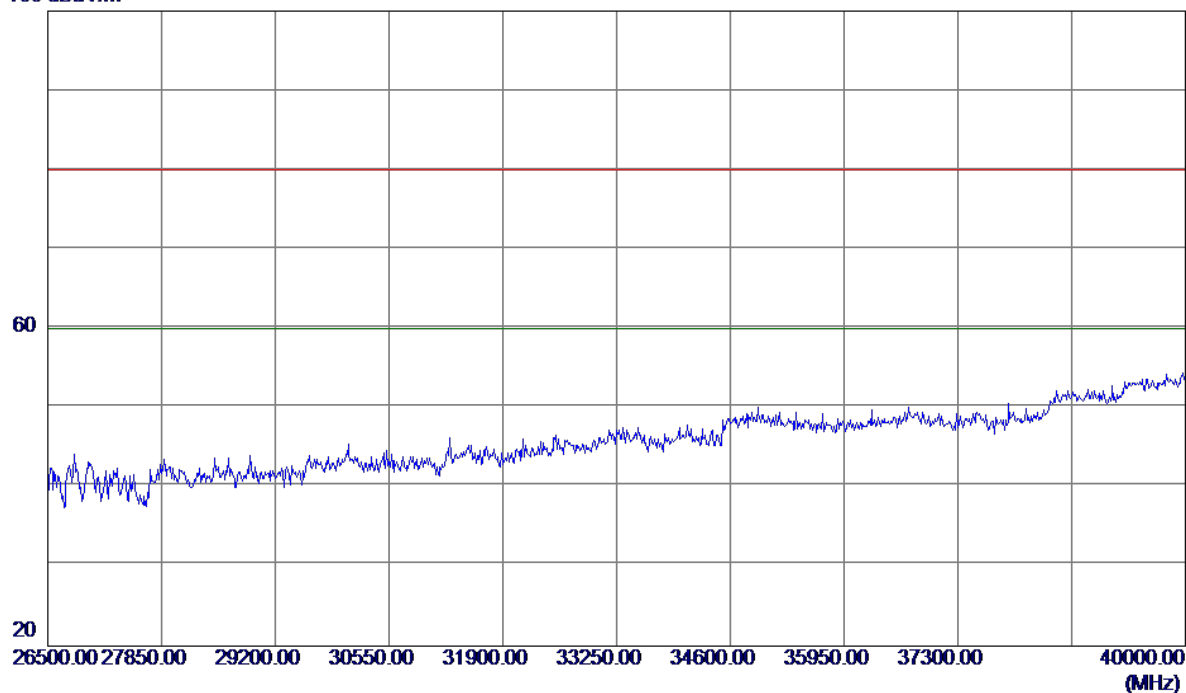


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5260MHz


Horizontal

125 dBuV/m

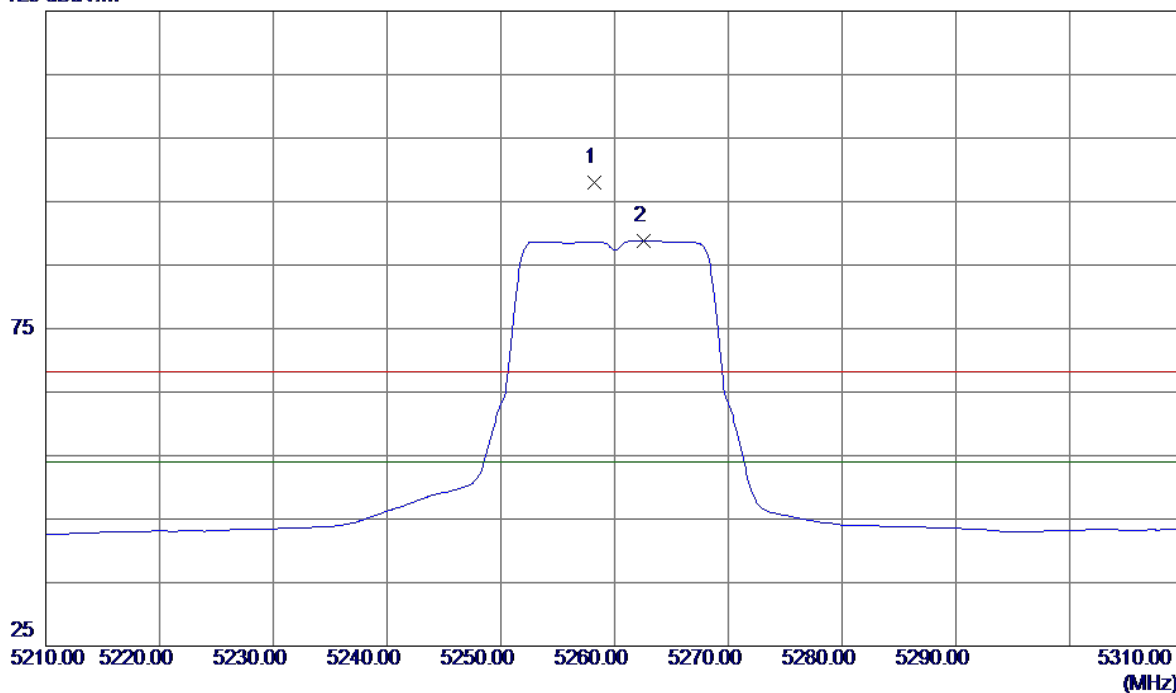


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5258.2000	56.44	41.65	98.09	68.30	29.79	Peak	No Limit
2 *	5262.6000	47.13	41.67	88.80	54.00	34.80	AVG	No Limit


Horizontal

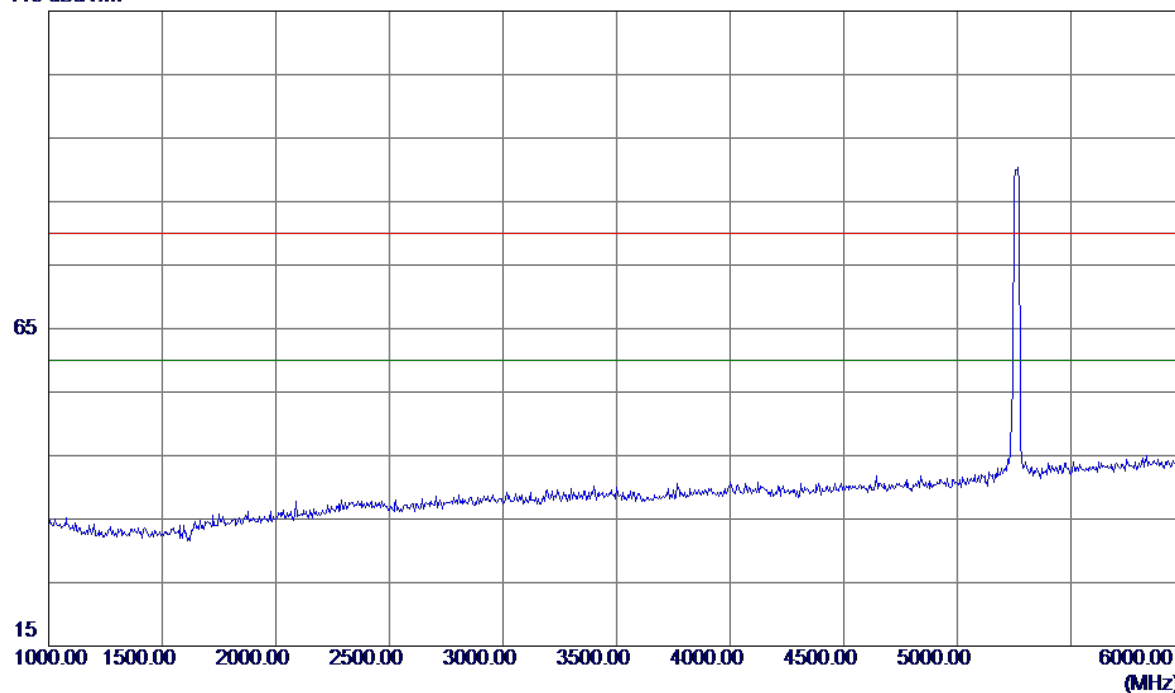Page 307 of 1590


Horizontal

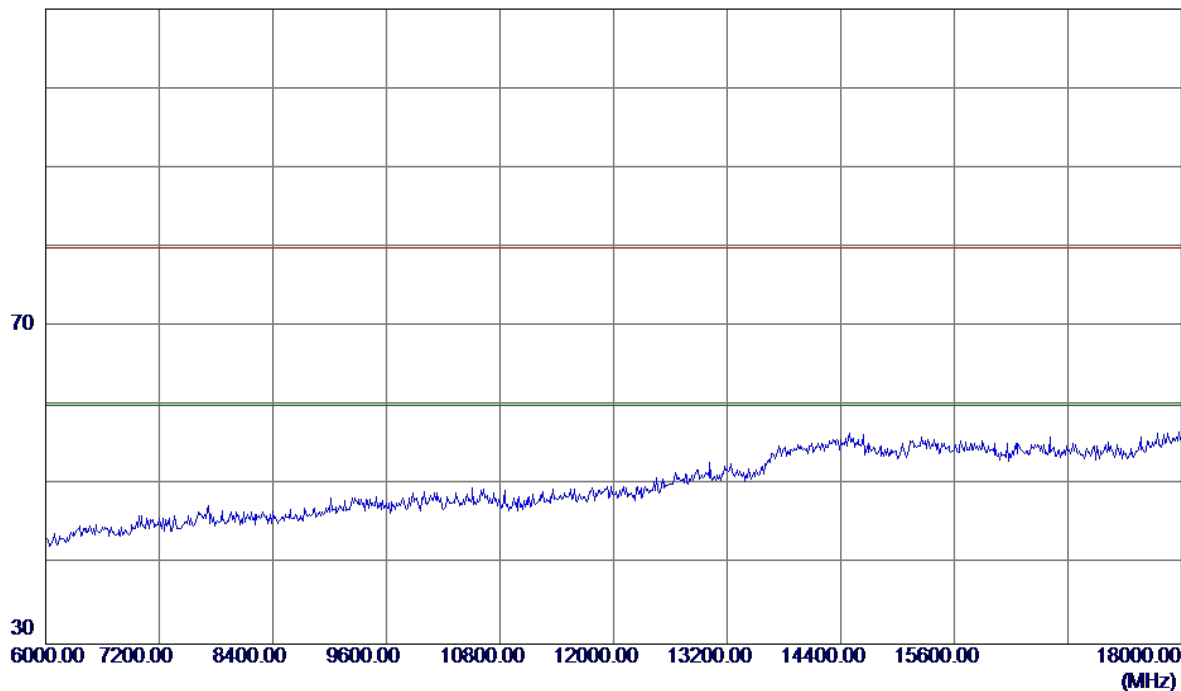Page 308 of 1590

Horizontal

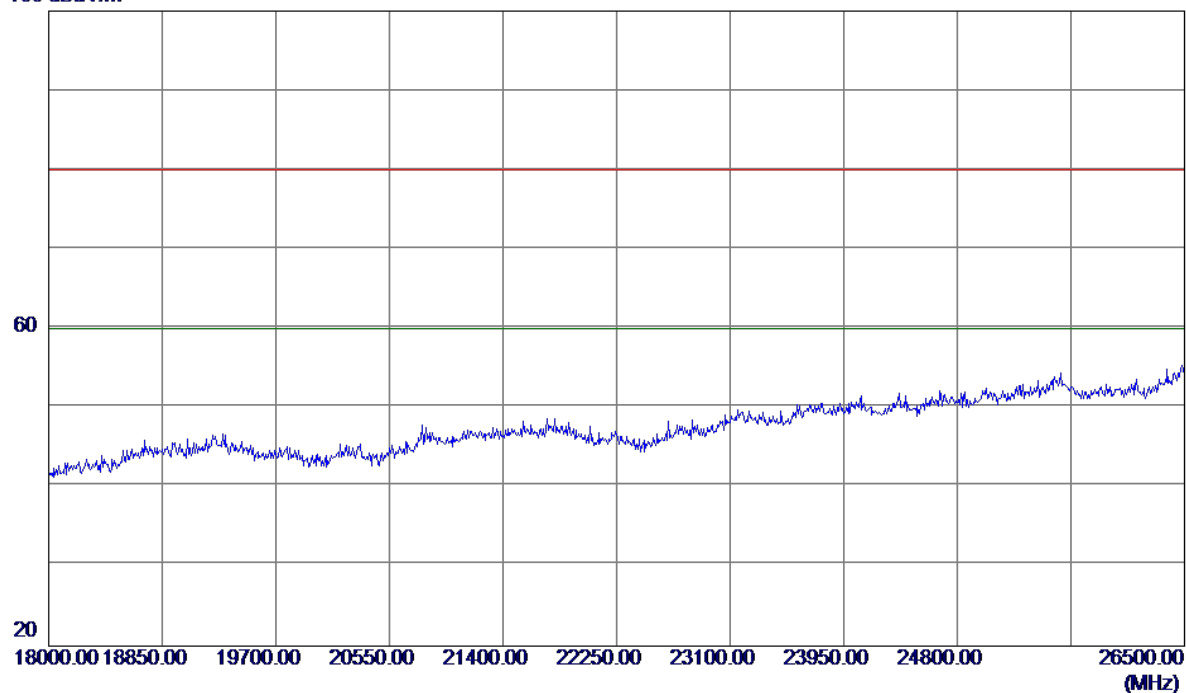Page 309 of 1590

Horizontal

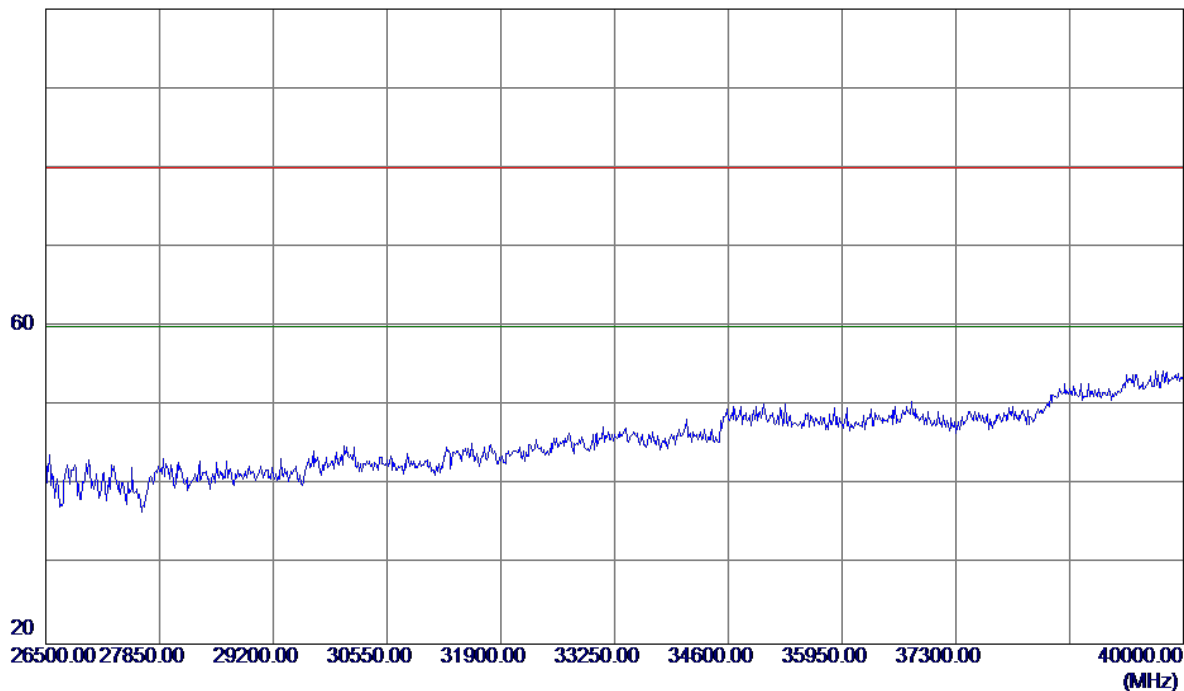


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

120 dBuV/m

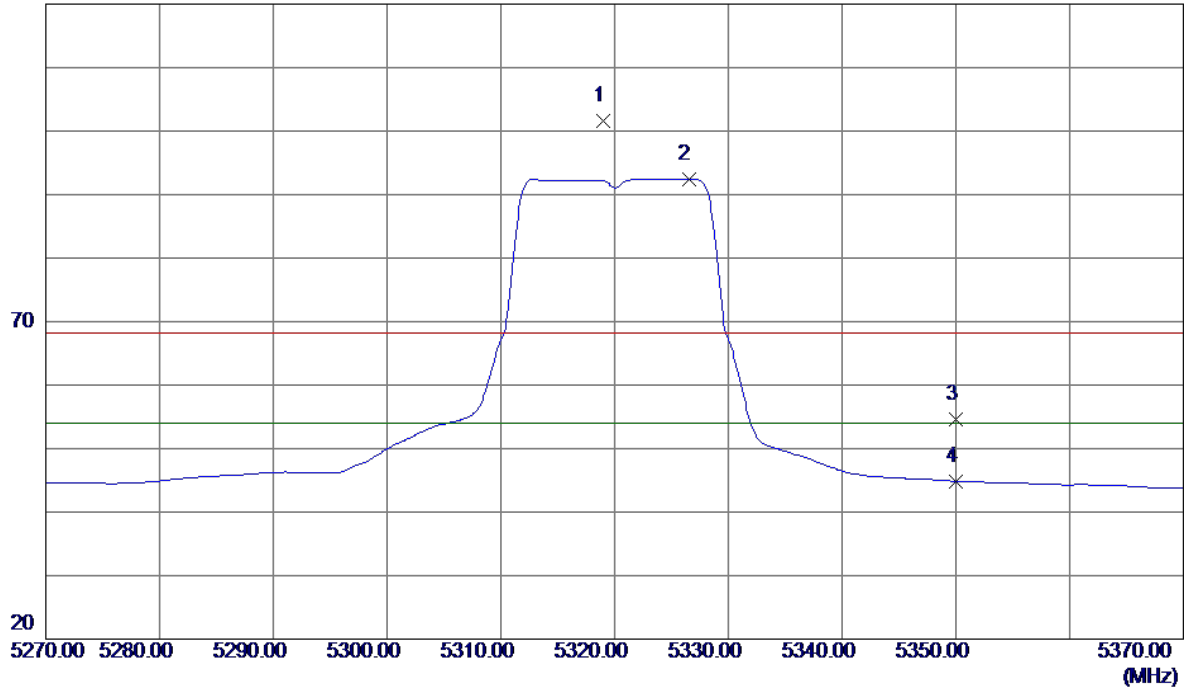


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5319.0000	59.62	41.96	101.58	68.30	33.28	Peak	No Limit
2 *	5326.5000	50.47	42.00	92.47	54.00	38.47	AVG	No Limit
3	5350.0000	12.57	42.12	54.69	68.30	-13.61	Peak	
4	5350.0000	2.71	42.12	44.83	54.00	-9.17	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

115 dBuV/m

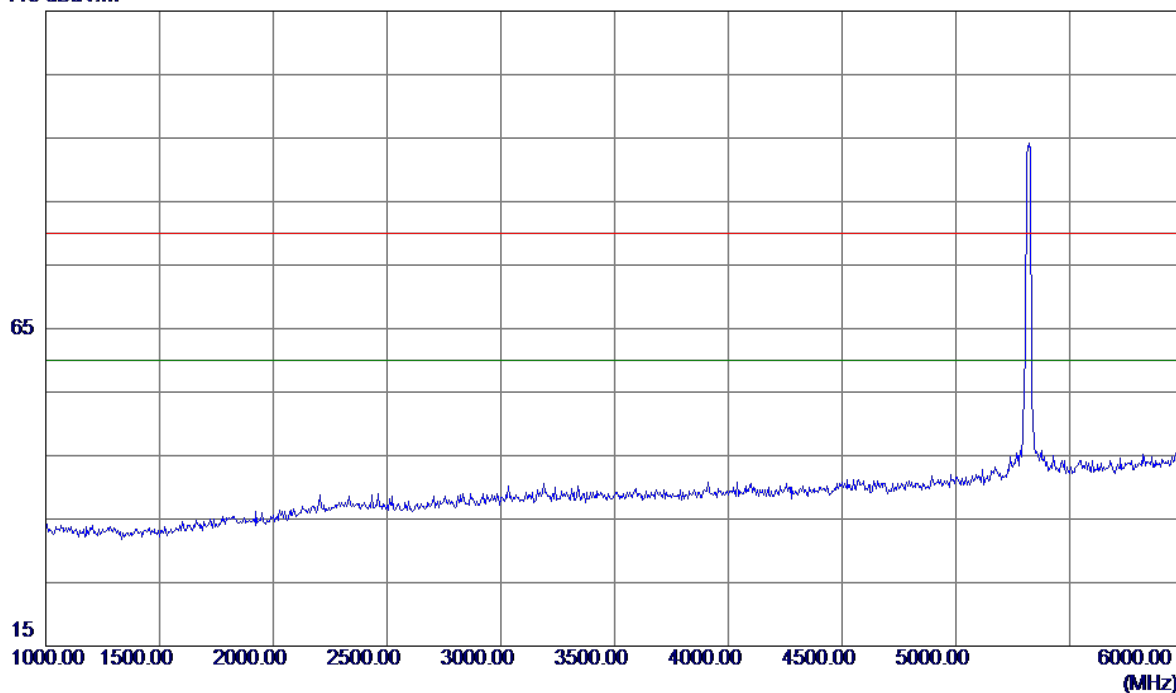


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Vertical

110 dBuV/m

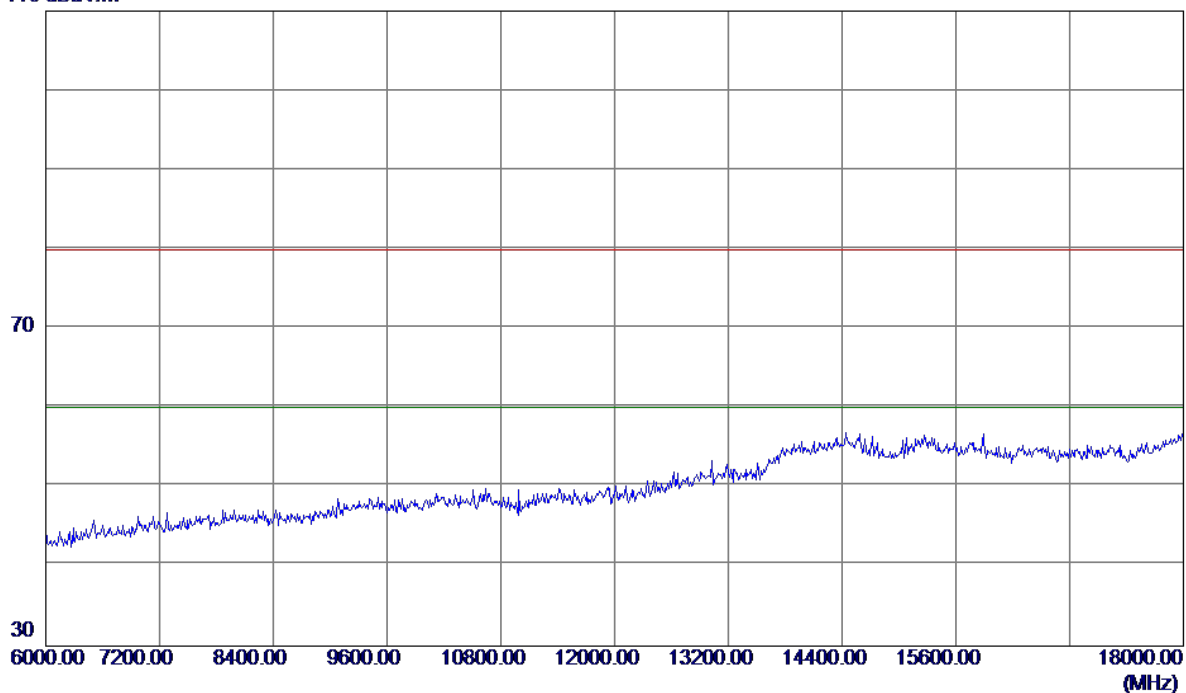

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		


Vertical

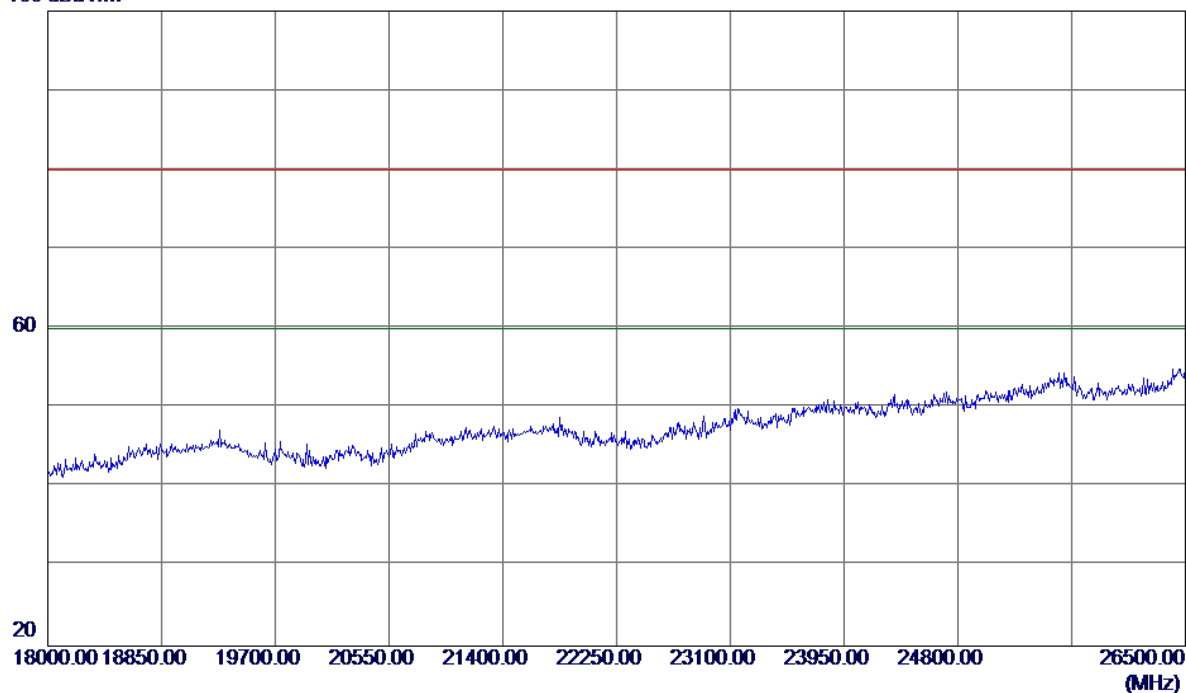Page 314 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz

Vertical

100 dBuV/m

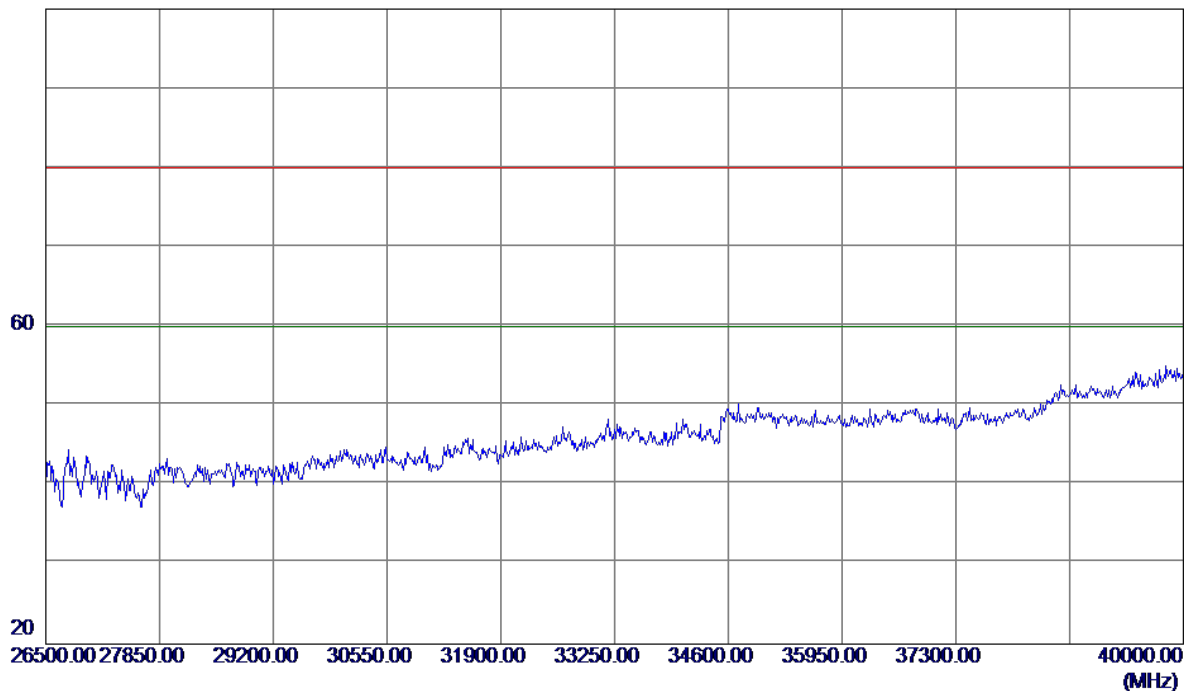


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX A Mode 5320MHz


Horizontal

125 dBuV/m

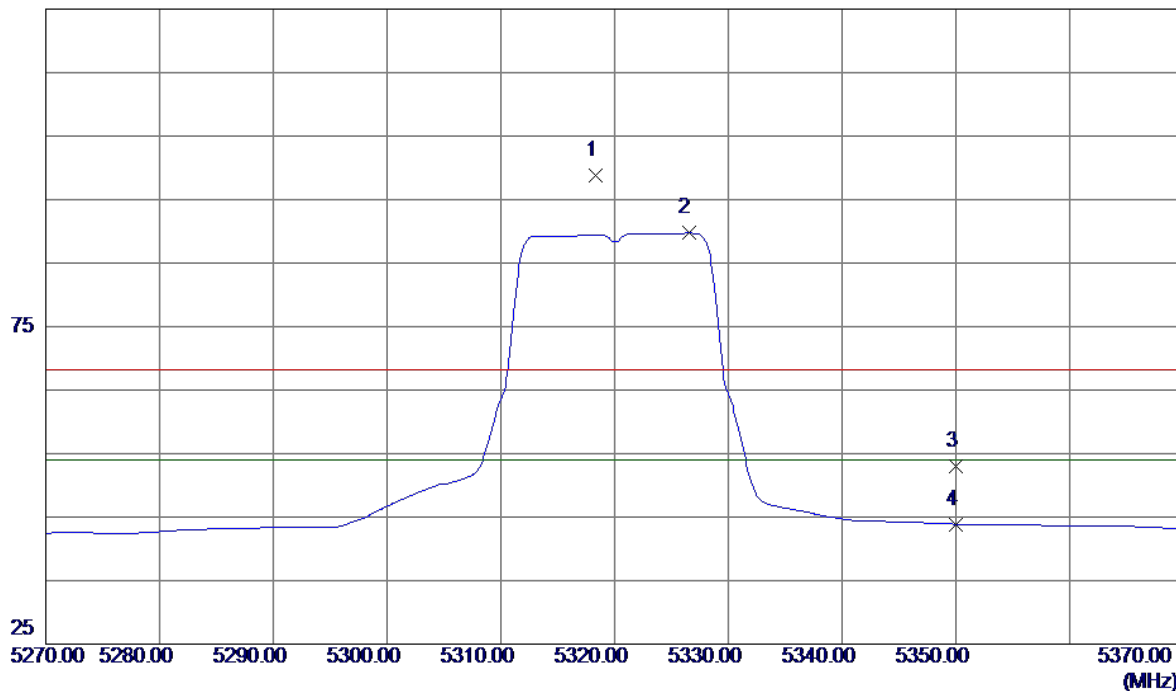


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5318.3000	56.89	41.96	98.85	68.30	30.55	Peak	No Limit
2 *	5326.5000	47.71	42.00	89.71	54.00	35.71	AVG	No Limit
3	5350.0000	10.82	42.12	52.94	68.30	-15.36	Peak	
4	5350.0000	1.75	42.12	43.87	54.00	-10.13	AVG	

Horizontal

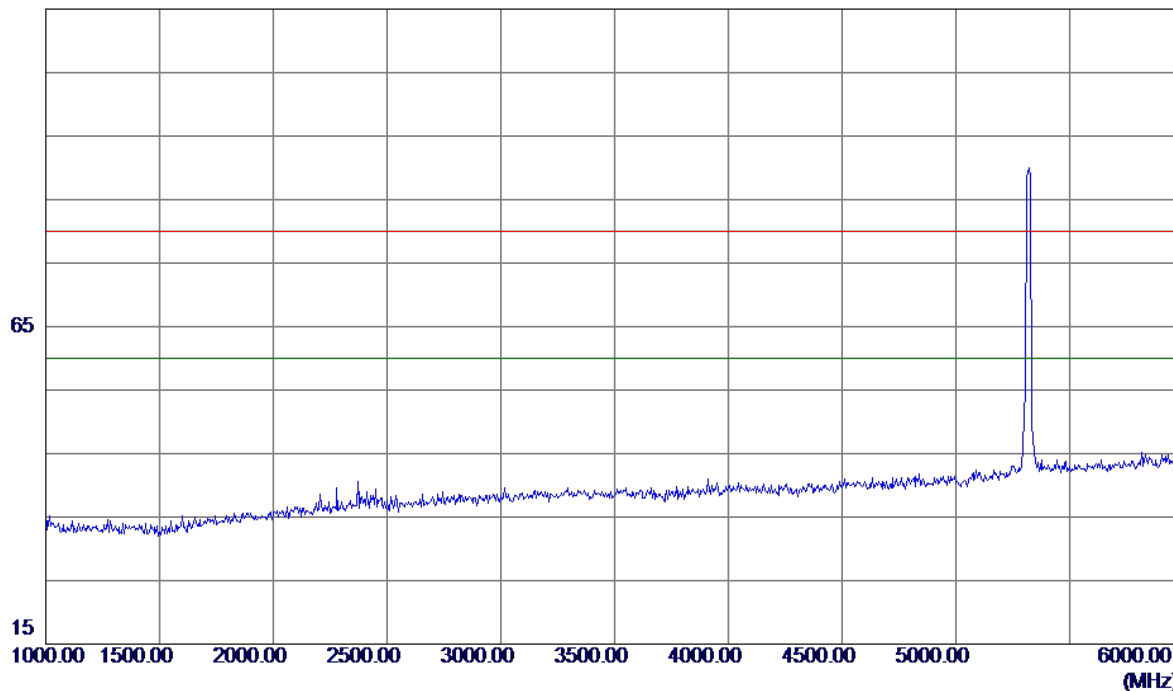


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

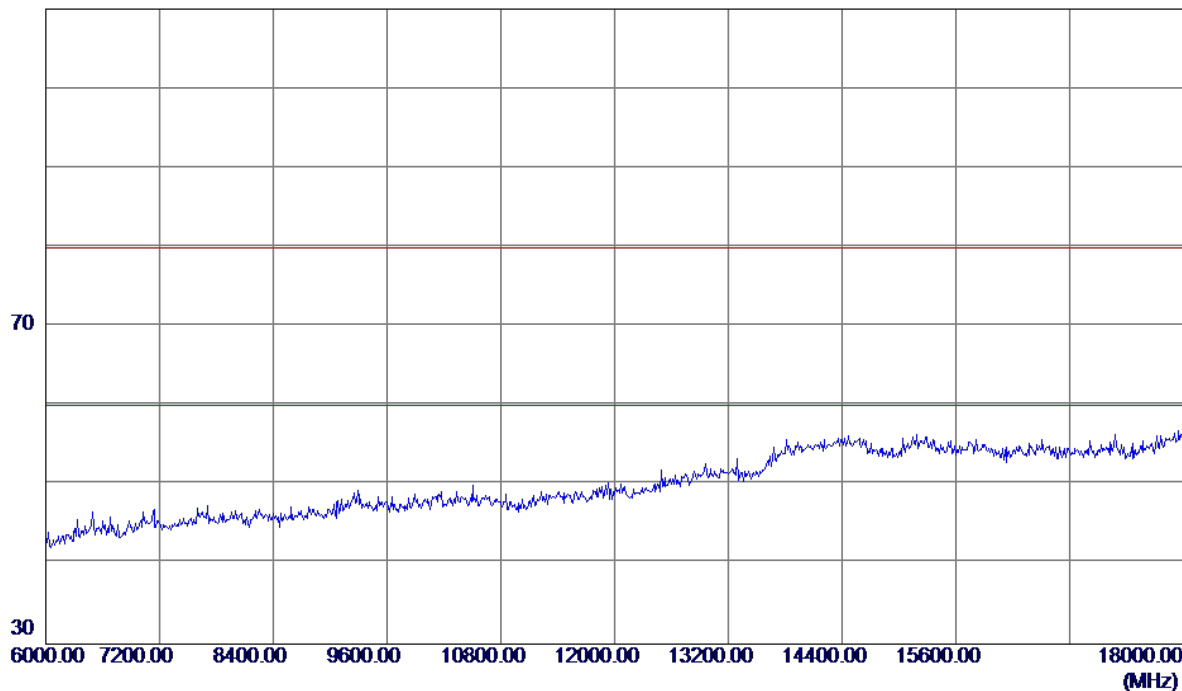


Horizontal

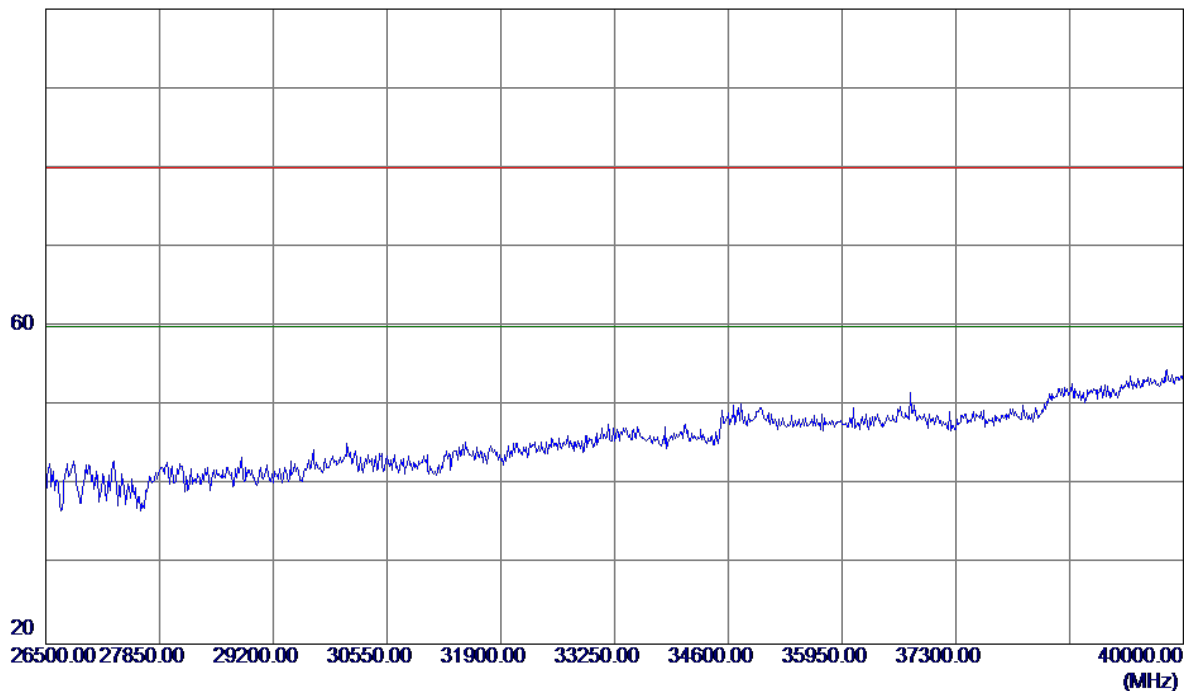

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

125 dBuV/m

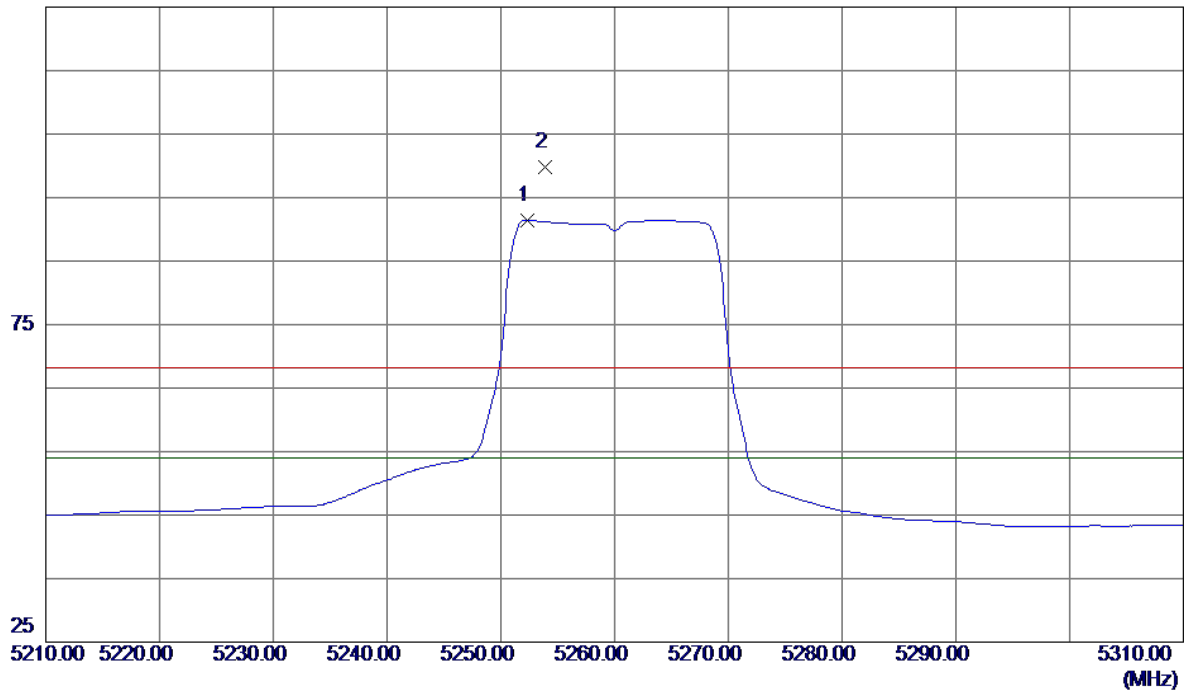


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5252.3000	49.81	41.62	91.43	54.00	37.43	AVG	No Limit
2	5253.9000	58.21	41.63	99.84	68.30	31.54	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Vertical

115 dBuV/m

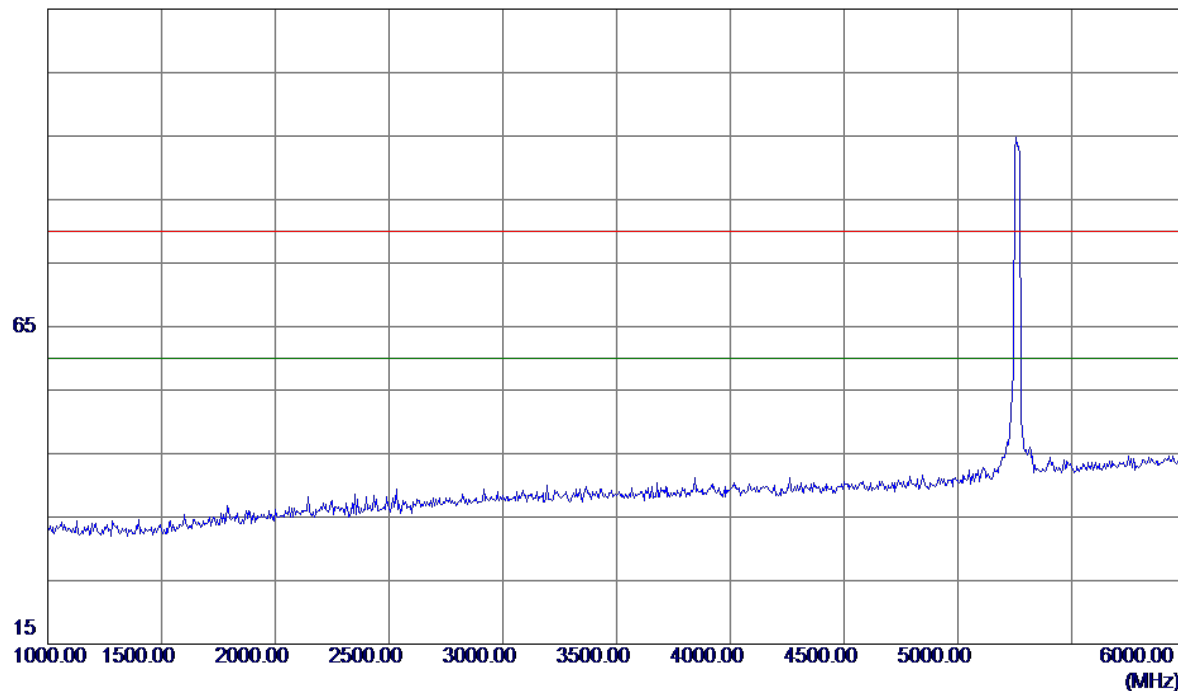


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz


Vertical

110 dBuV/m

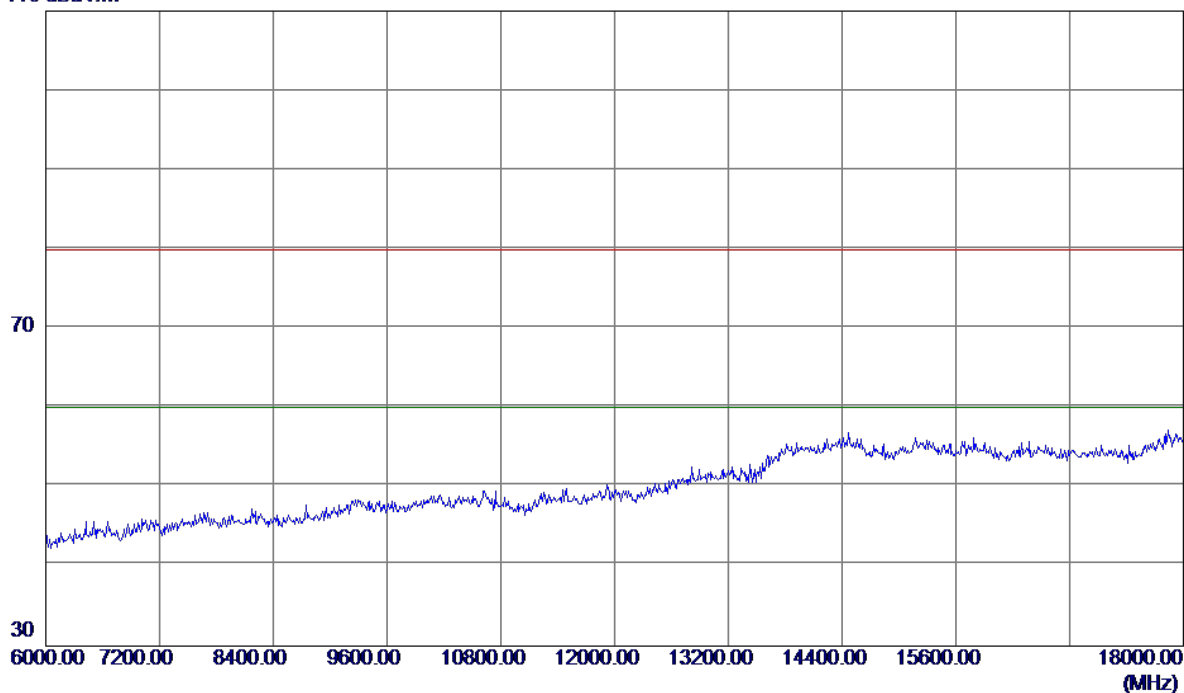


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Vertical

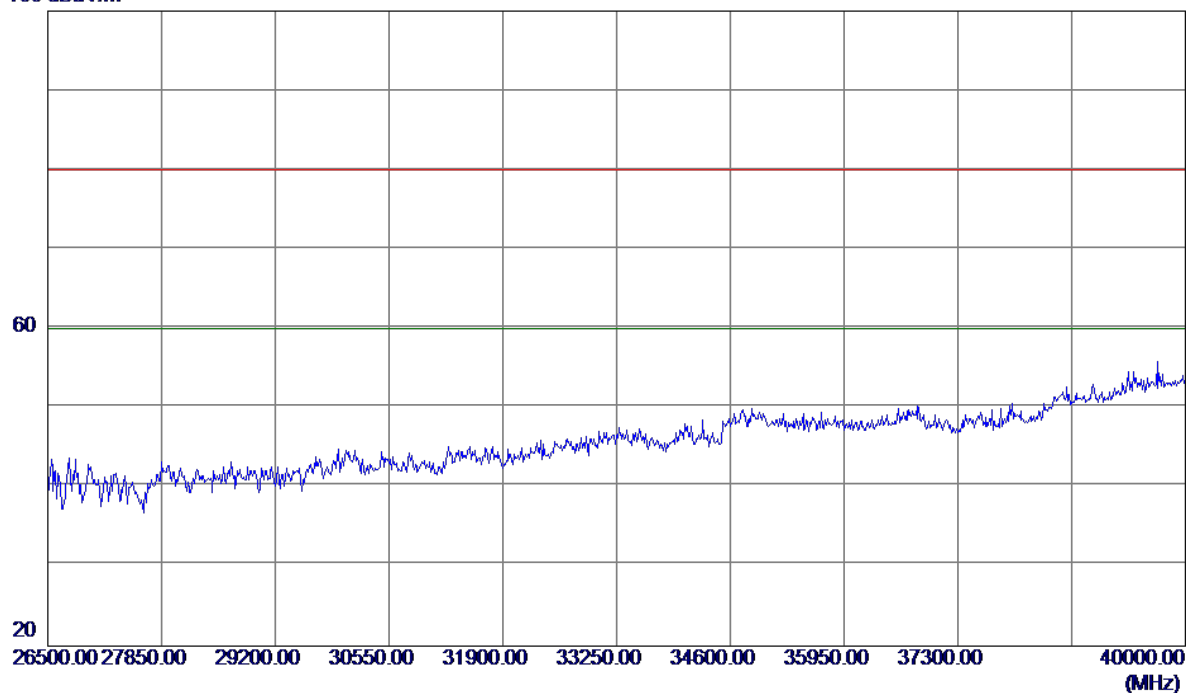Page 325 of 1590


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

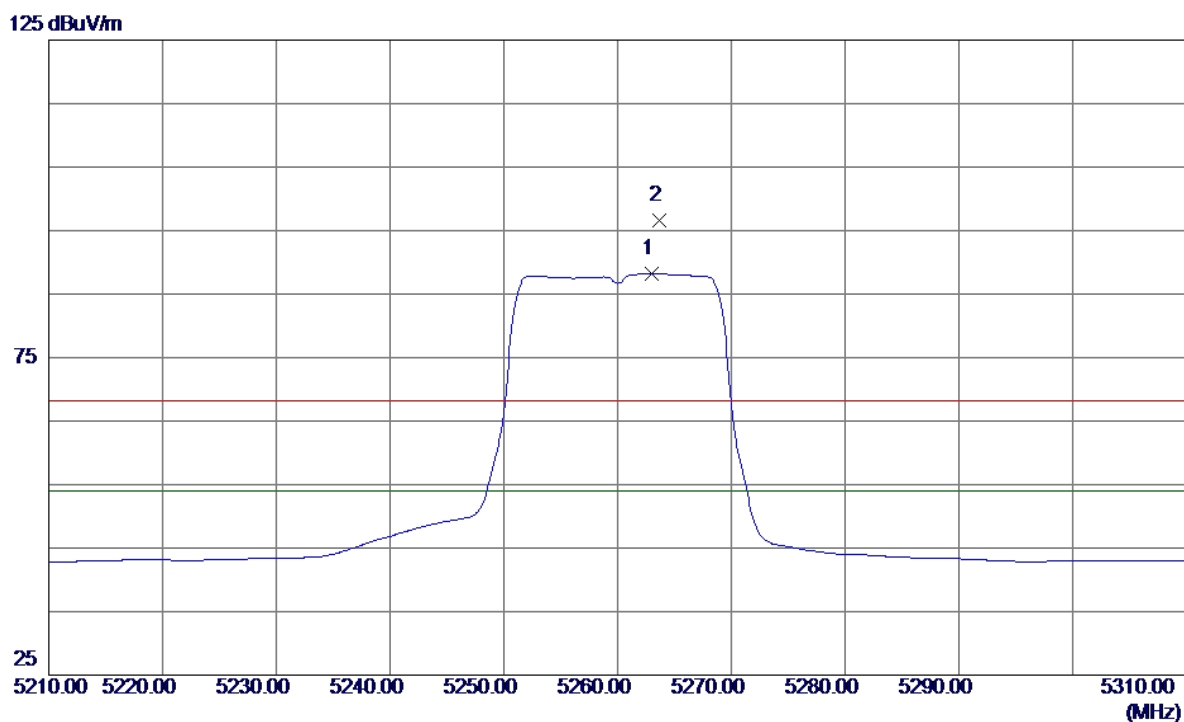


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5263.0000	46.48	41.68	88.16	54.00	34.16	AVG	No Limit
2	5263.7000	55.01	41.68	96.69	68.30	28.39	Peak	No Limit

Horizontal

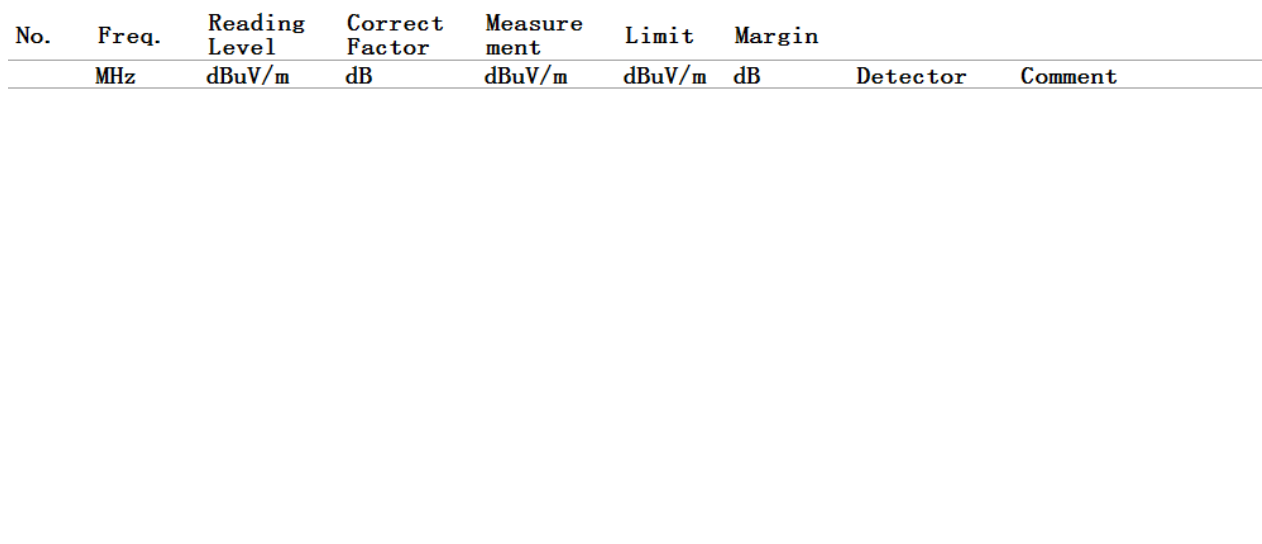

Horizontal

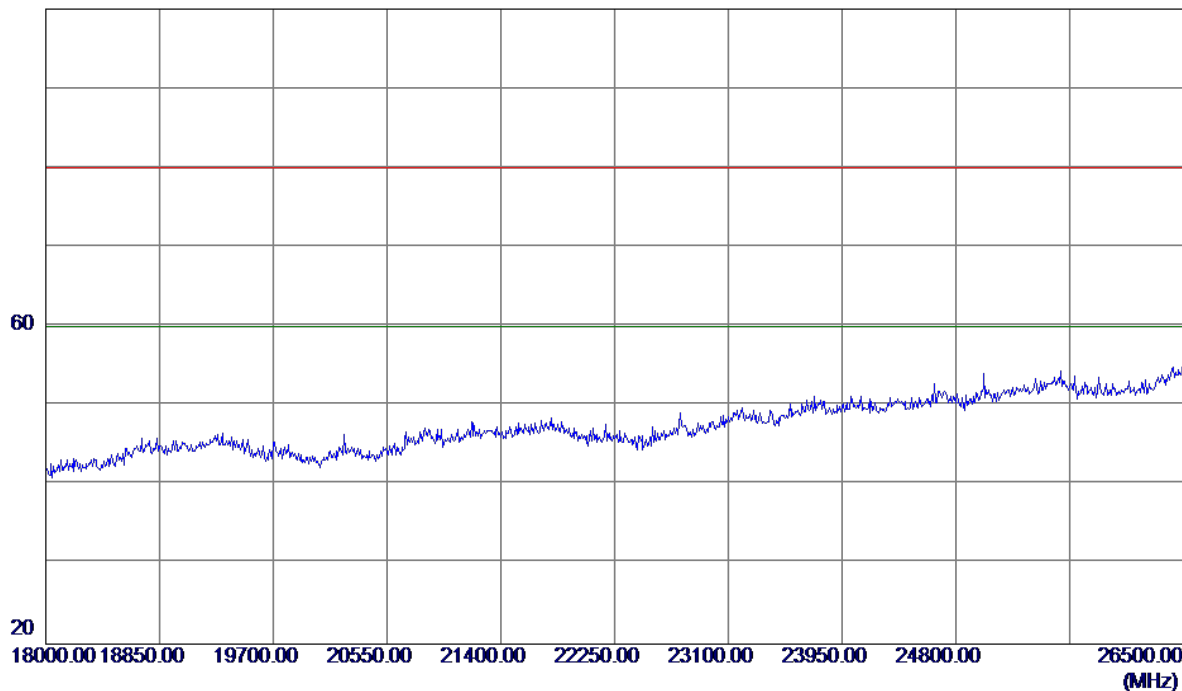


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5260MHz

Horizontal

100 dBuV/m

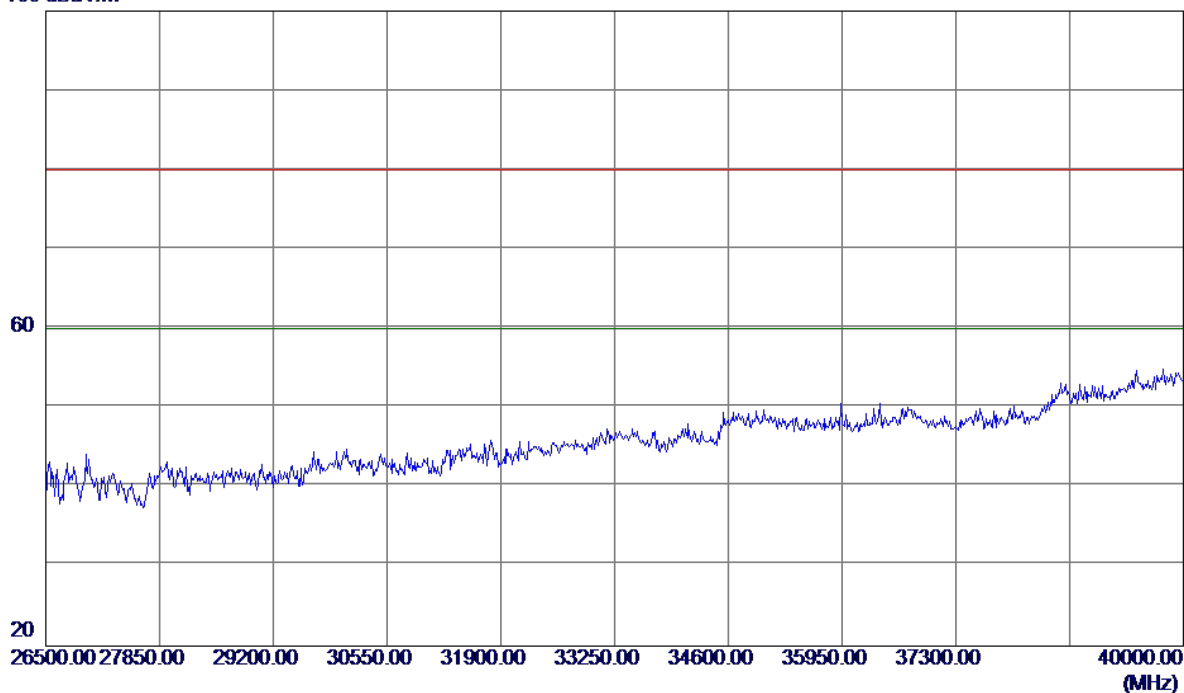


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

125 dBuV/m

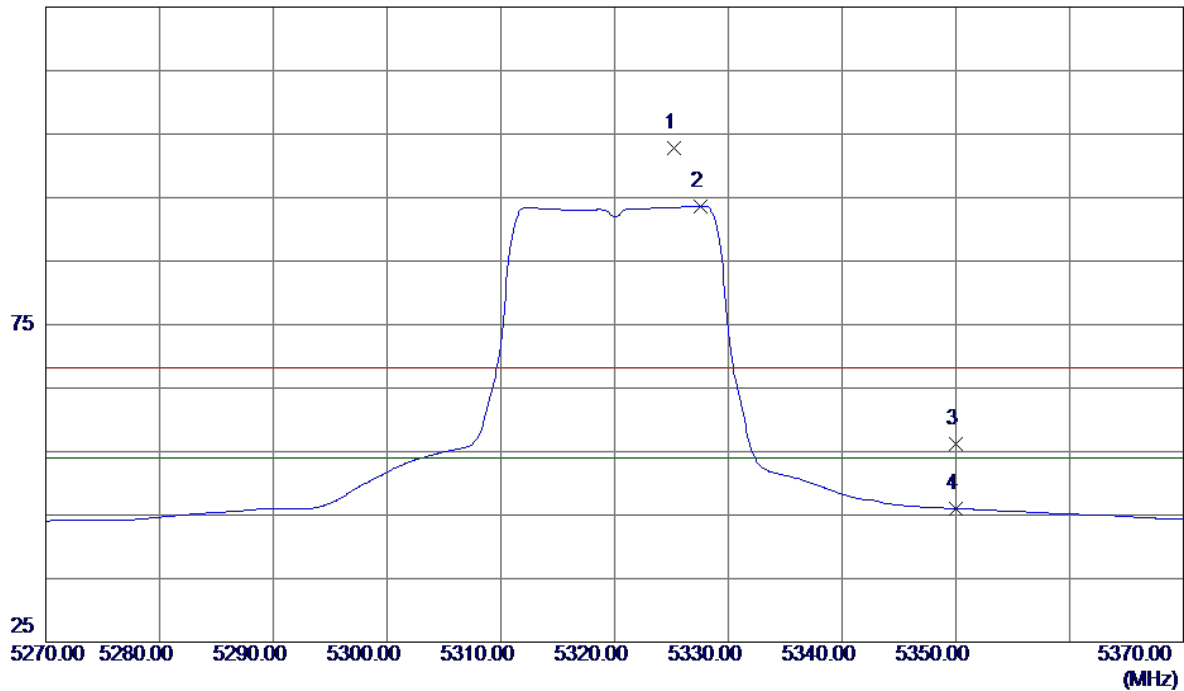


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5325.2000	60.73	41.99	102.72	68.30	34.42	Peak	No Limit
2 *	5327.6000	51.69	42.00	93.69	54.00	39.69	AVG	No Limit
3	5350.0000	14.11	42.12	56.23	68.30	-12.07	Peak	
4	5350.0000	3.88	42.12	46.00	54.00	-8.00	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

115 dBuV/m

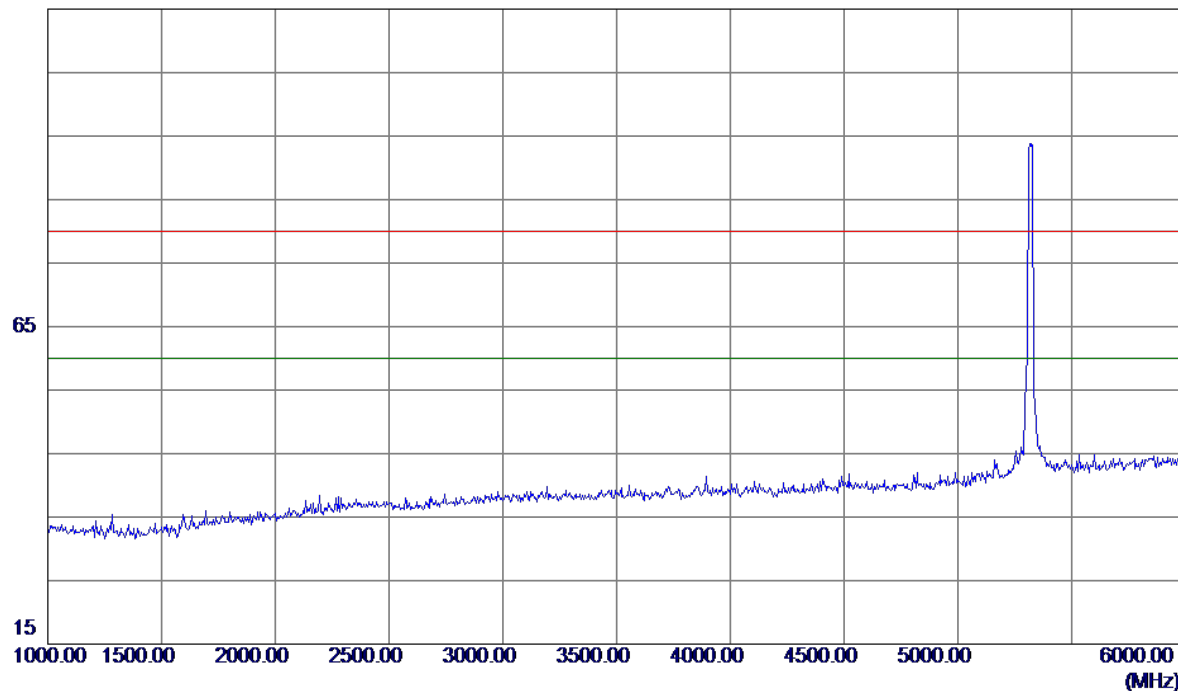


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Vertical

110 dBuV/m

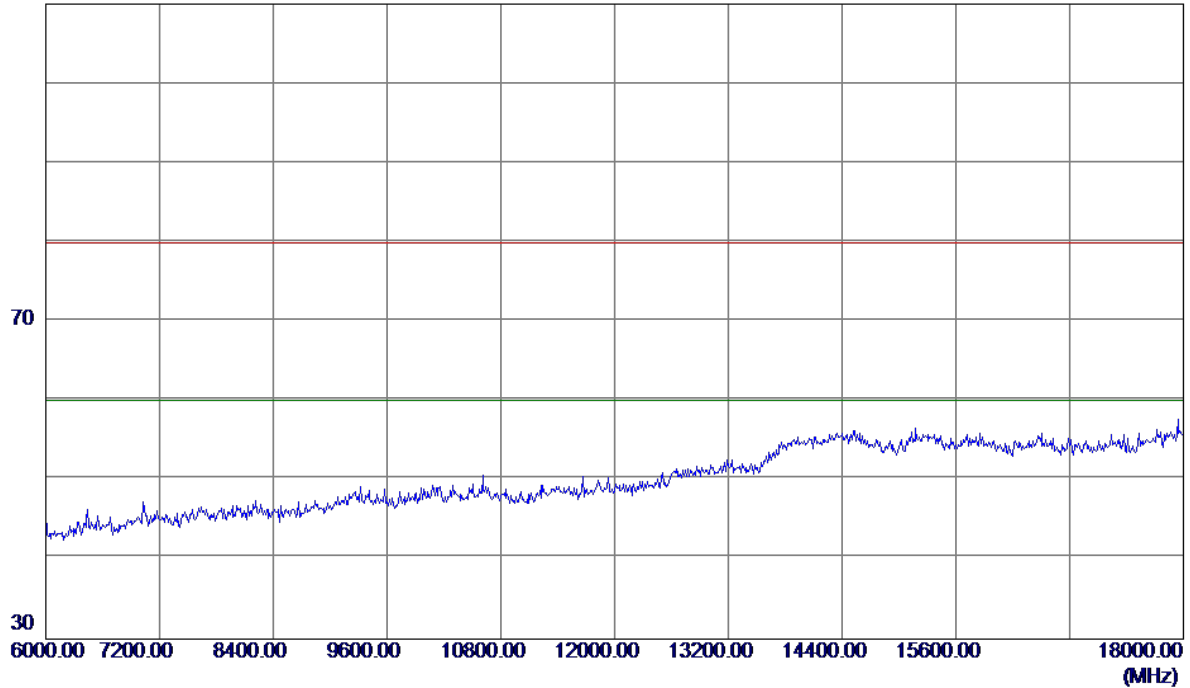


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Vertical

100 dBuV/m

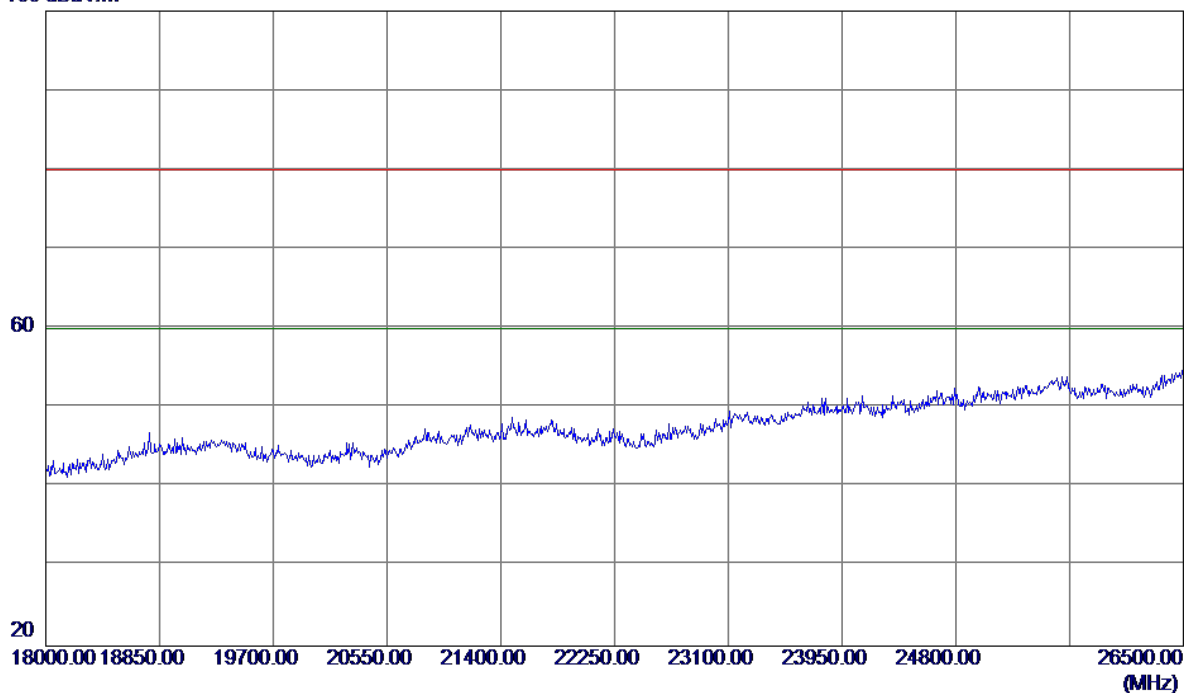

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Vertical

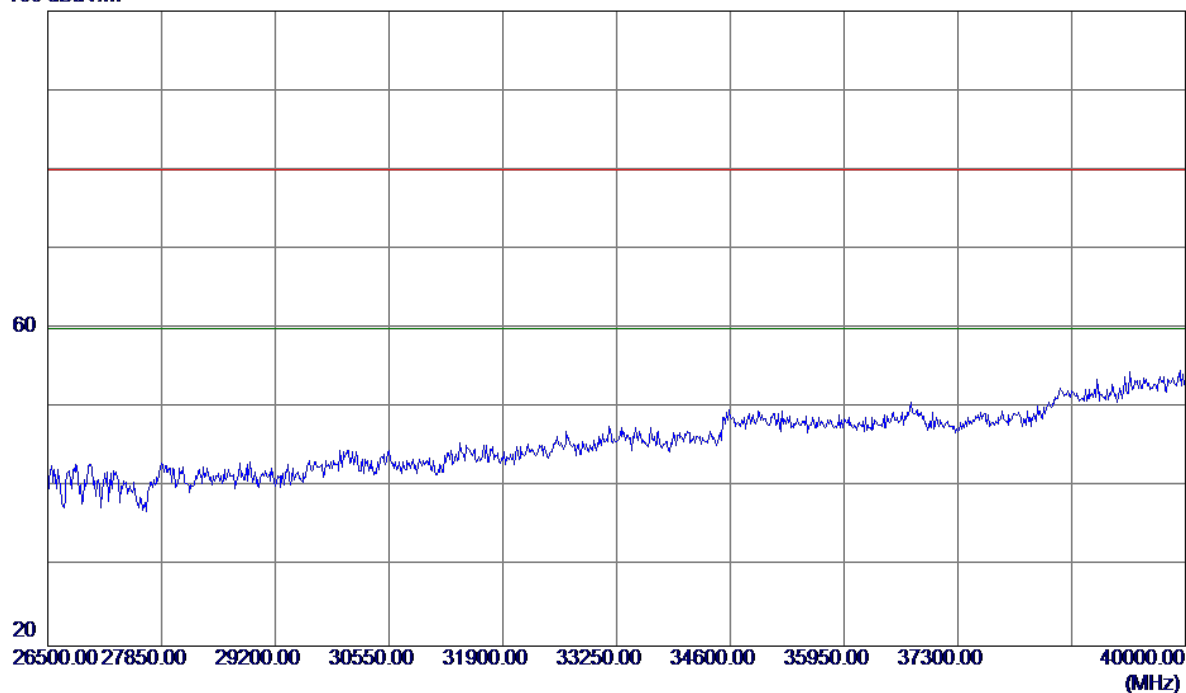


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz

Horizontal

125 dBuV/m

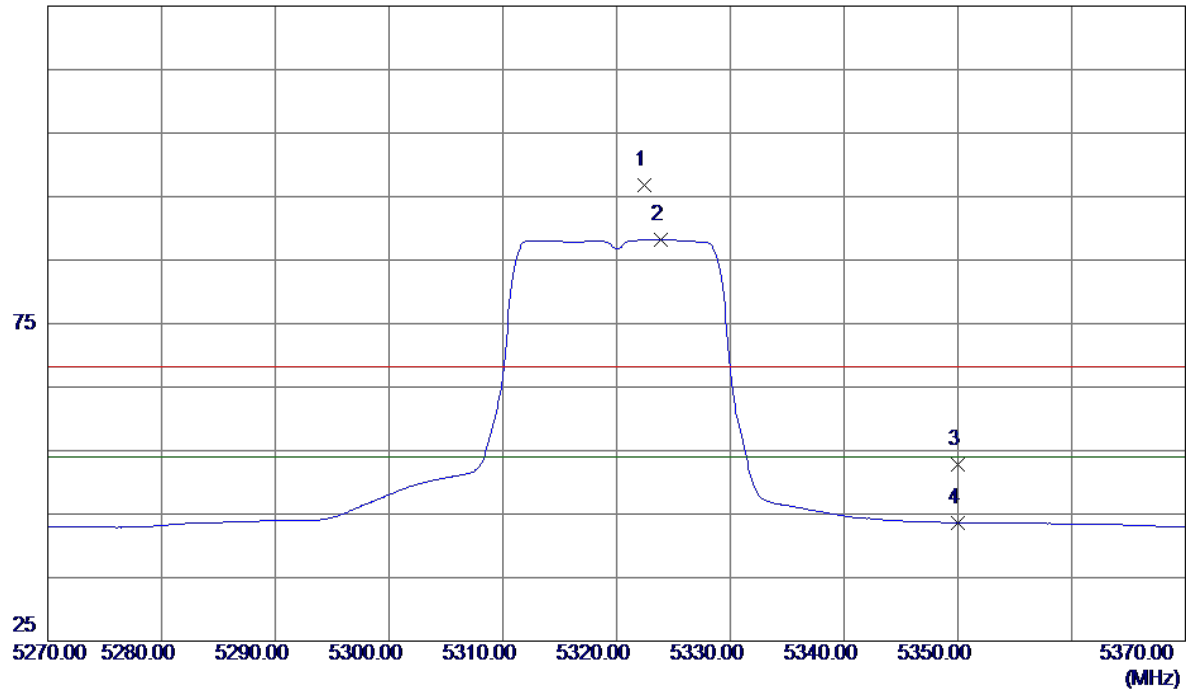


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5322.4000	54.77	41.98	96.75	68.30	28.45	Peak	No Limit
2 *	5323.9000	46.18	41.99	88.17	54.00	34.17	AVG	No Limit
3	5350.0000	10.59	42.12	52.71	68.30	-15.59	Peak	
4	5350.0000	1.53	42.12	43.65	54.00	-10.35	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N20 Mode 5320MHz


Horizontal

115 dBuV/m

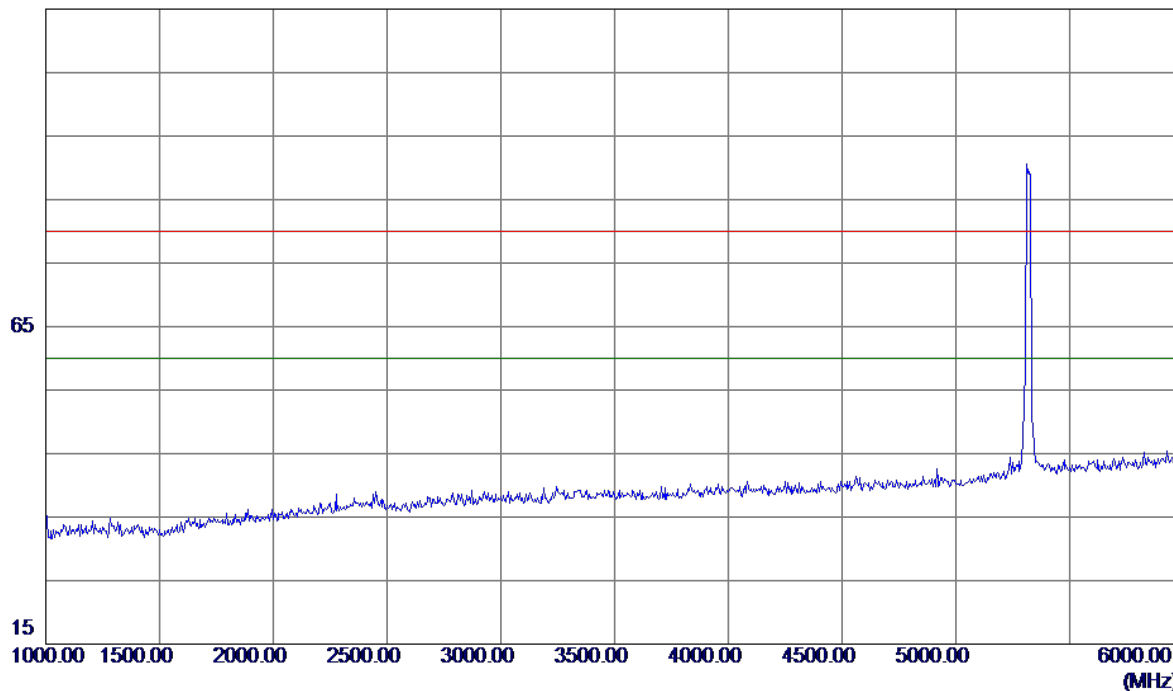


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Horizontal

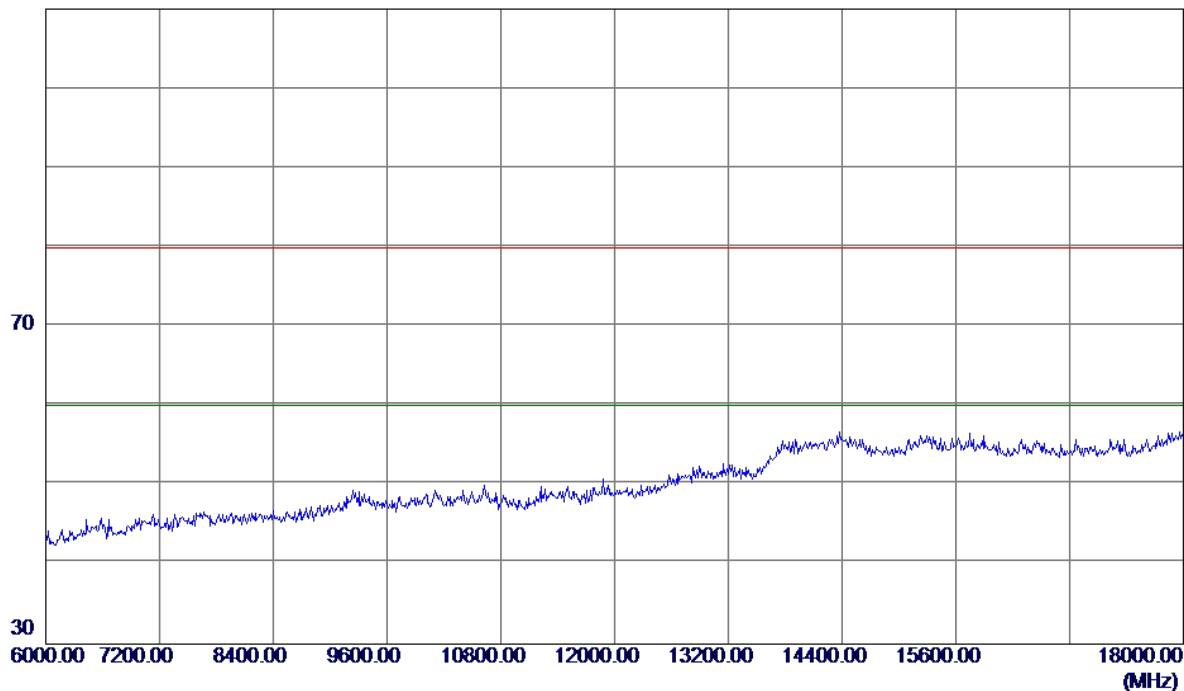
Page 338 of 1590

Horizontal

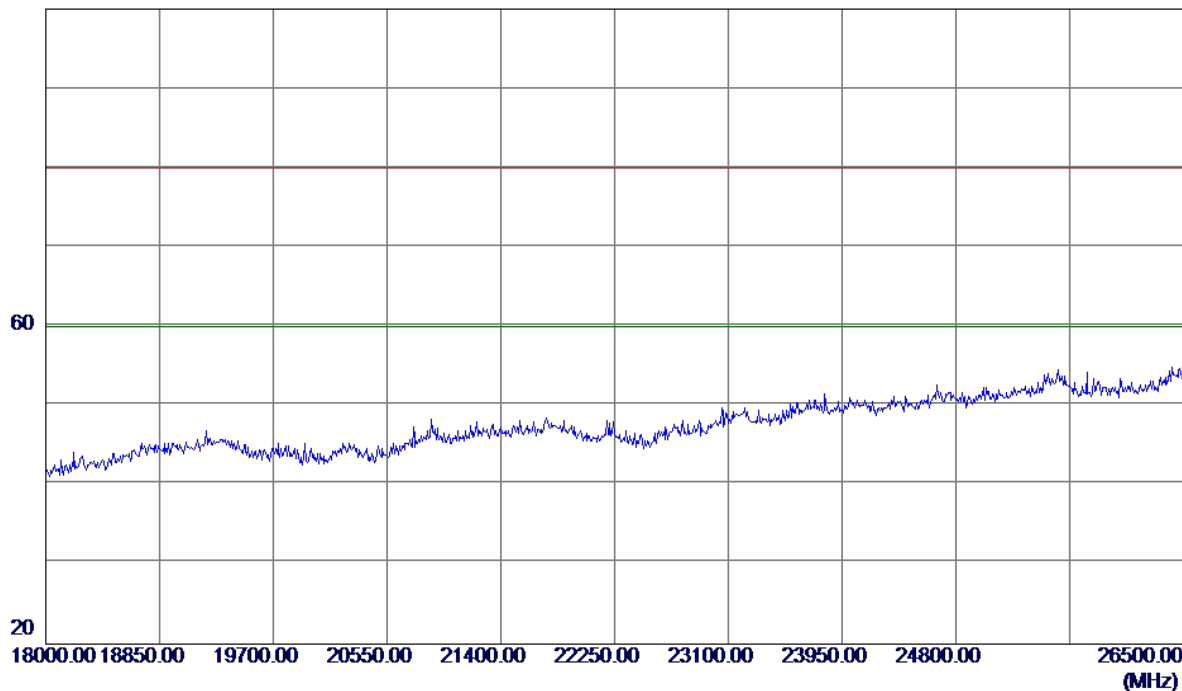

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

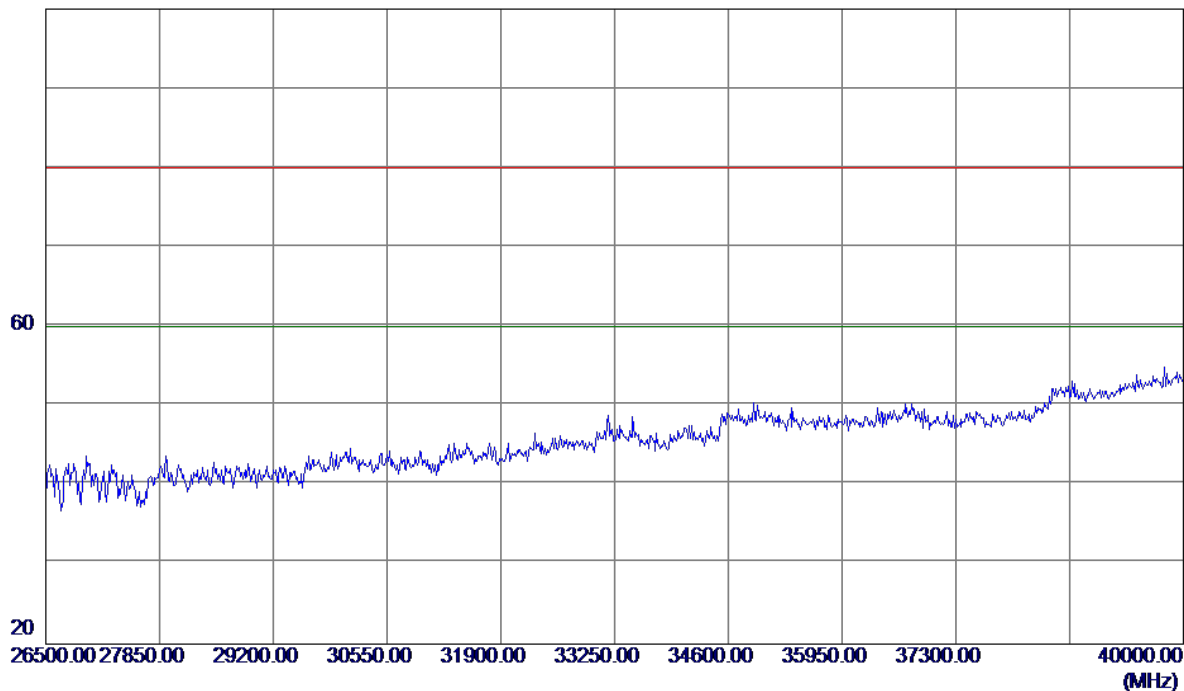


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Vertical

125 dBuV/m

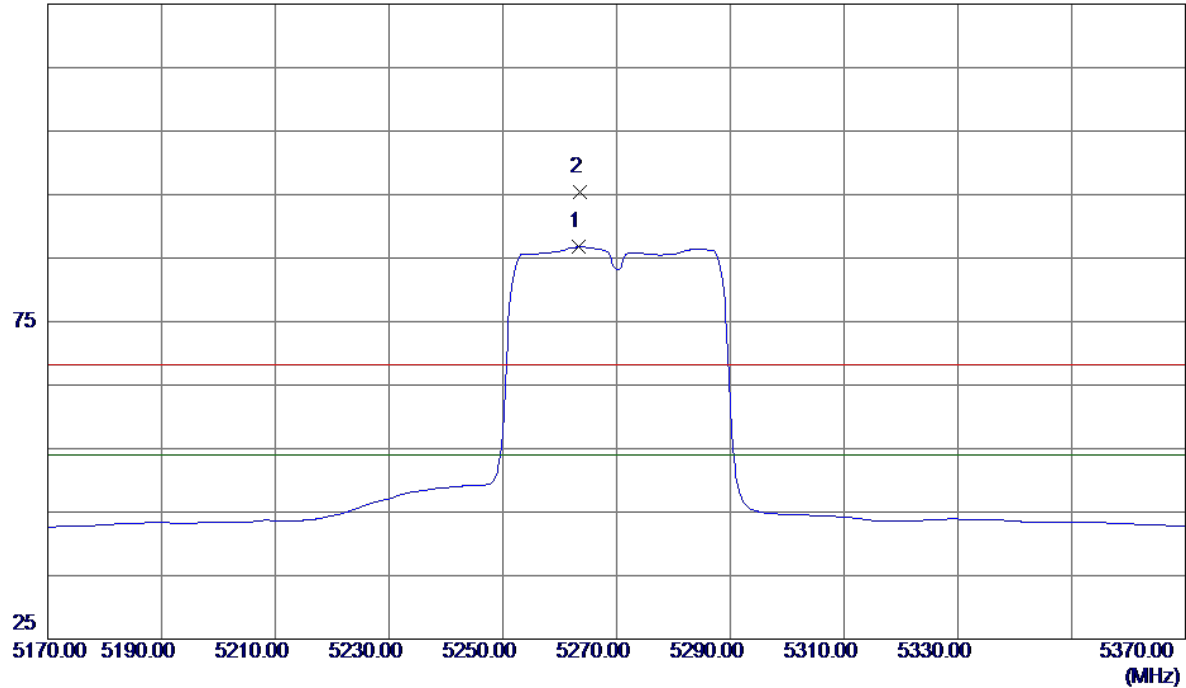


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5263.4000	45.05	41.68	86.73	54.00	32.73	AVG	No Limit
2	5263.6000	53.76	41.68	95.44	68.30	27.14	Peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Vertical

115 dBuV/m

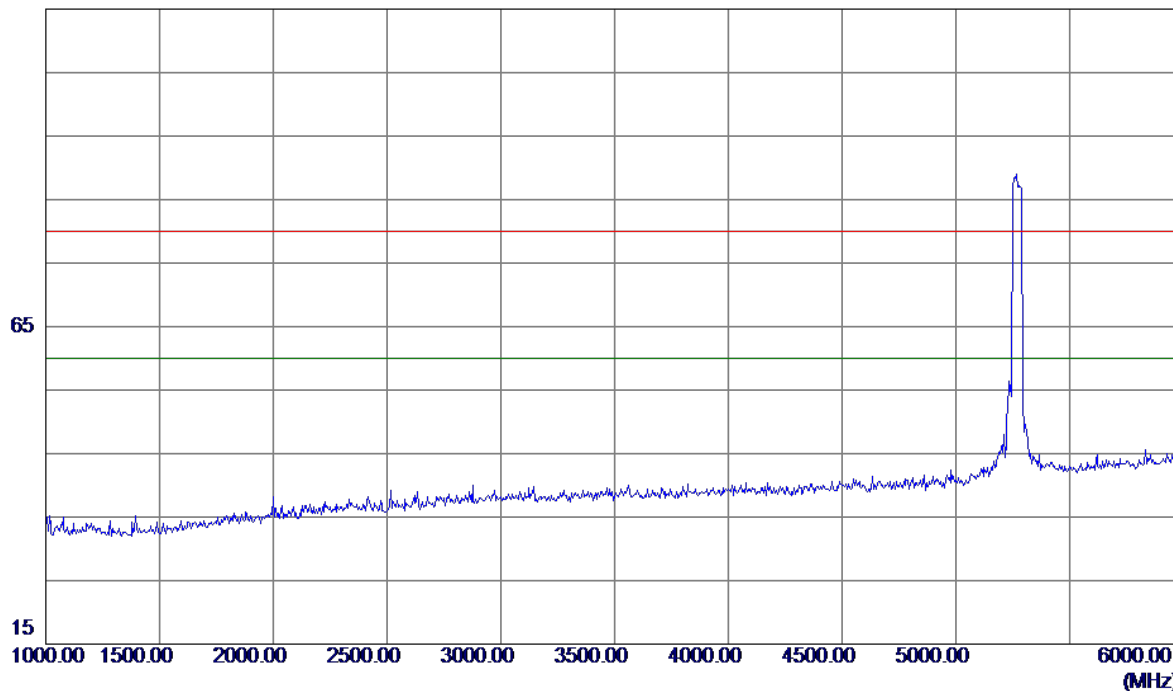

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Vertical

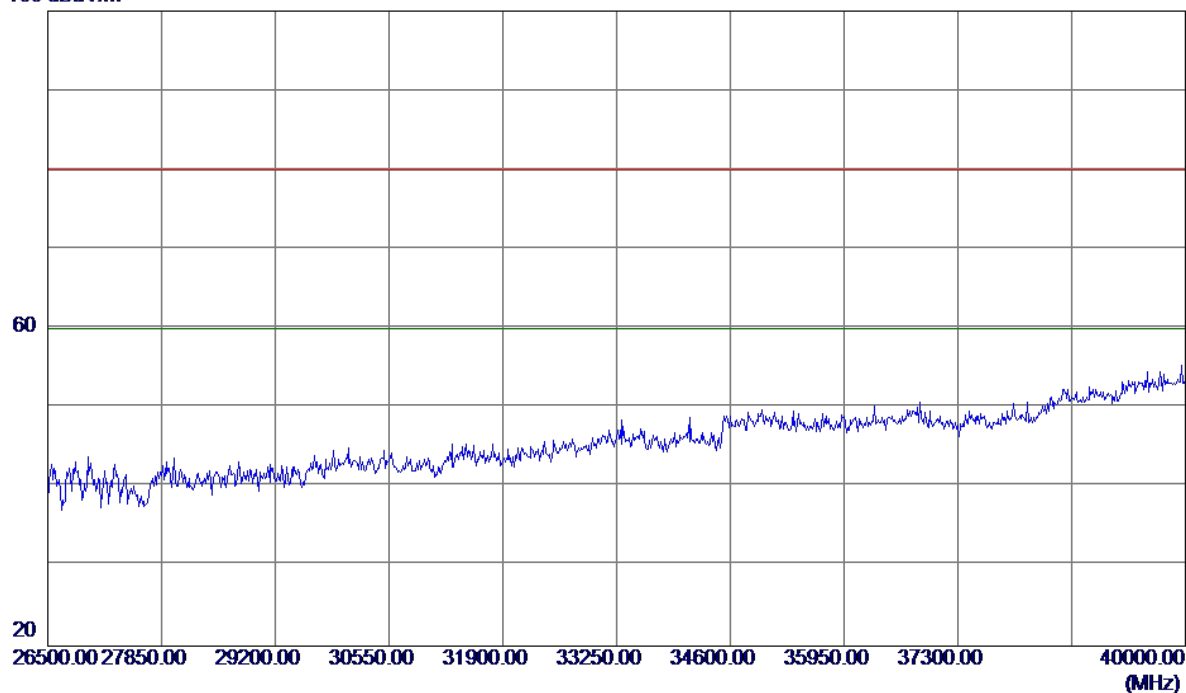


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz


Horizontal

125 dBuV/m

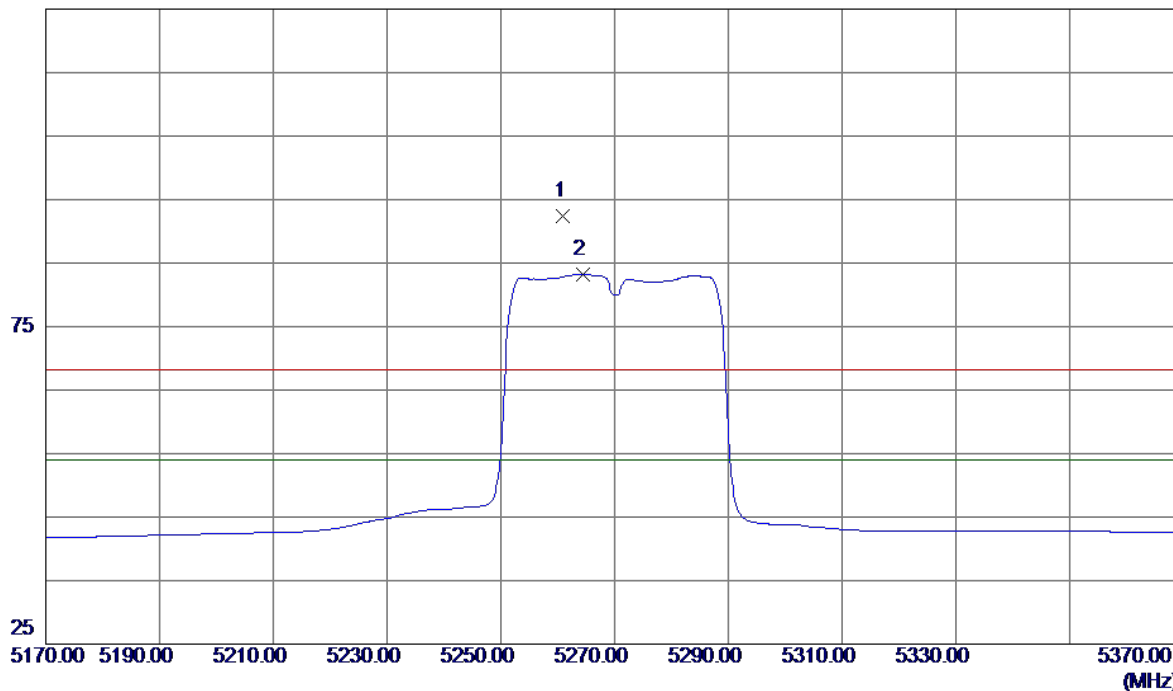

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5261.0000	50.73	41.67	92.40	68.30	24.10	Peak	No Limit
2 *	5264.4000	41.52	41.68	83.20	54.00	29.20	AVG	No Limit

Horizontal

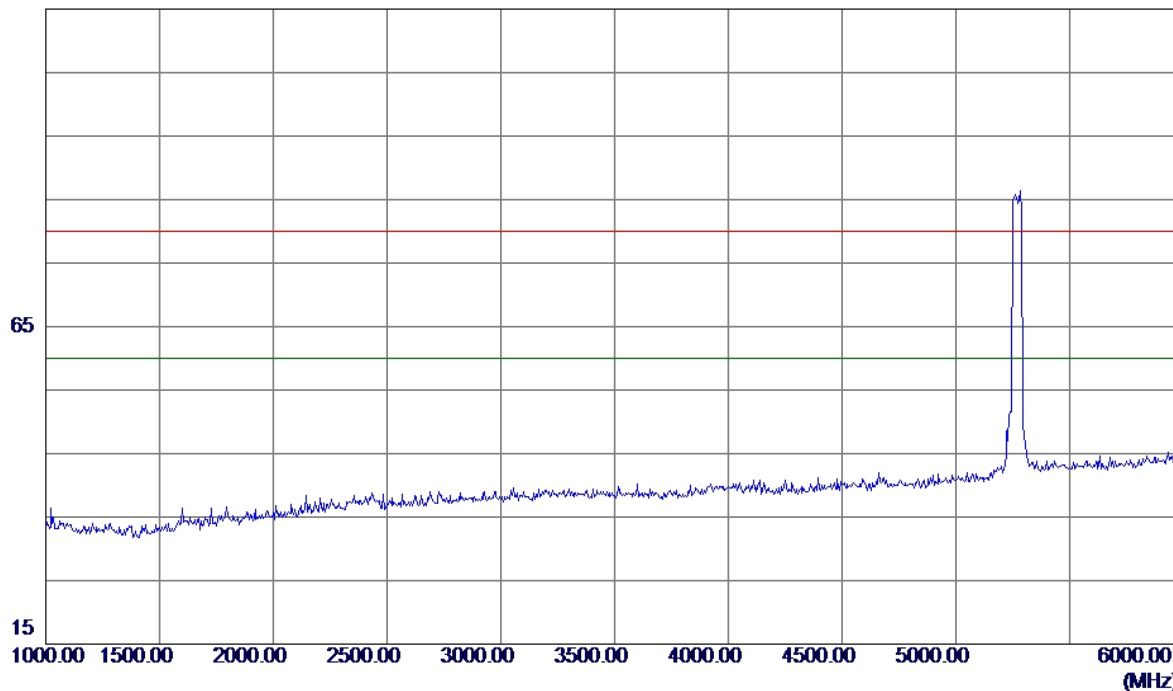


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

110 dBuV/m

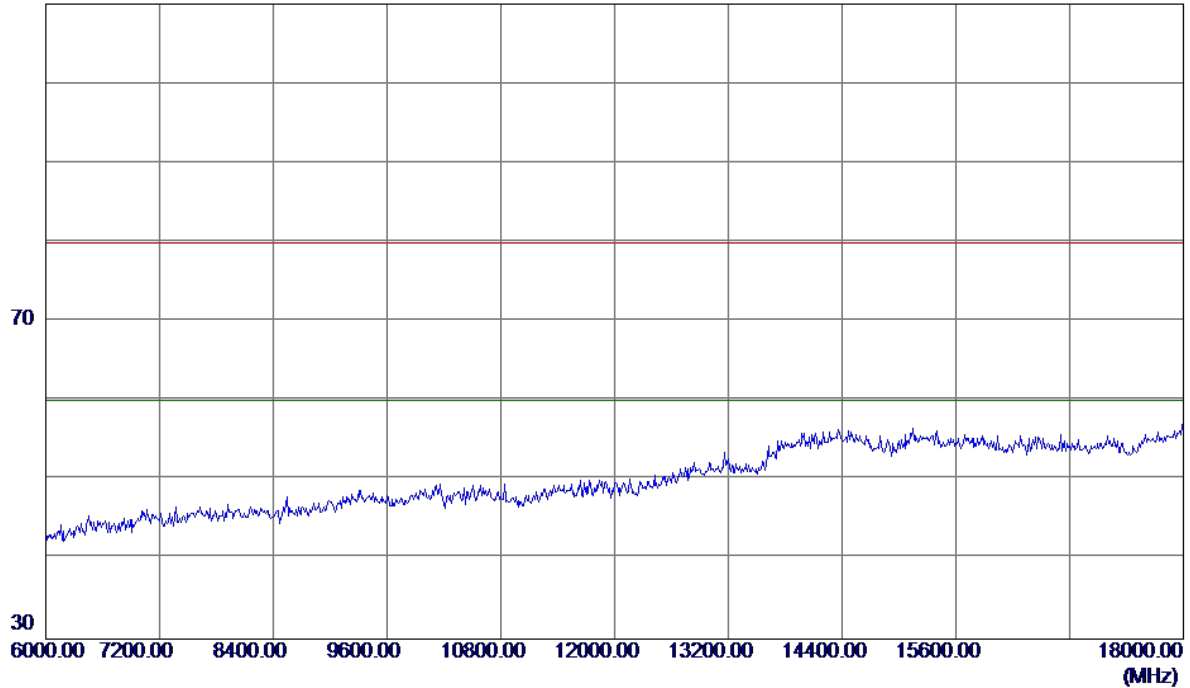


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	--------------	----------------------------	-------------------------	---------------------------	-----------------	--------------	----------	---------

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

100 dBuV/m

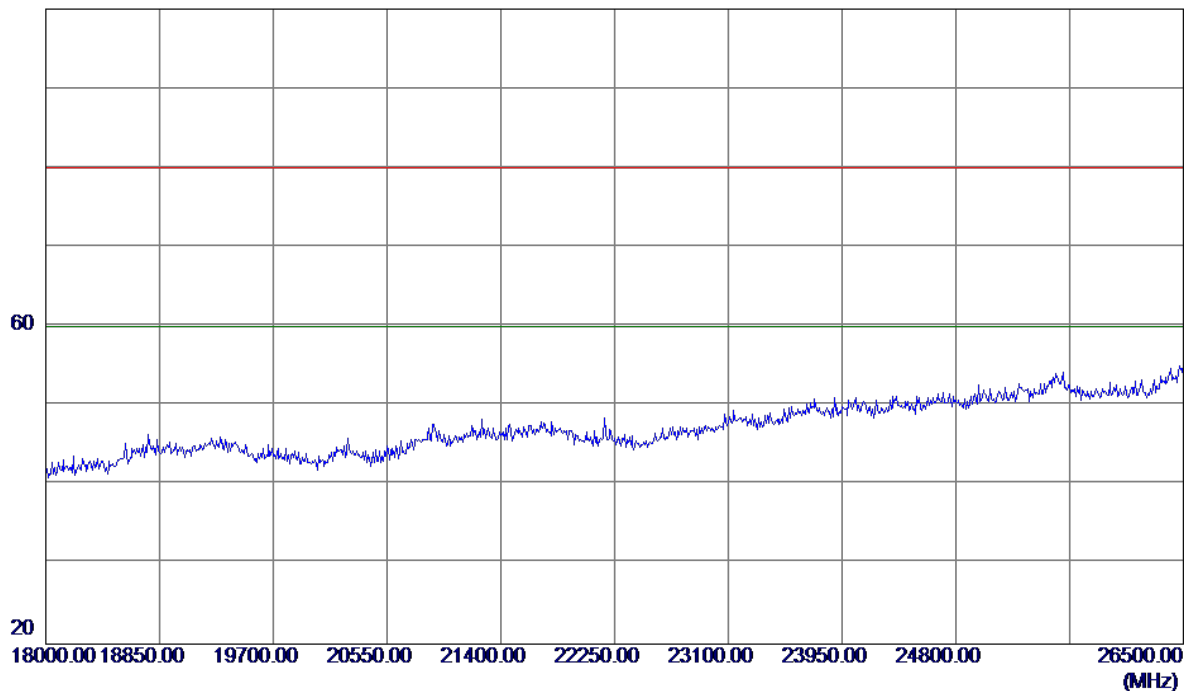


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5270MHz

Horizontal

100 dBuV/m

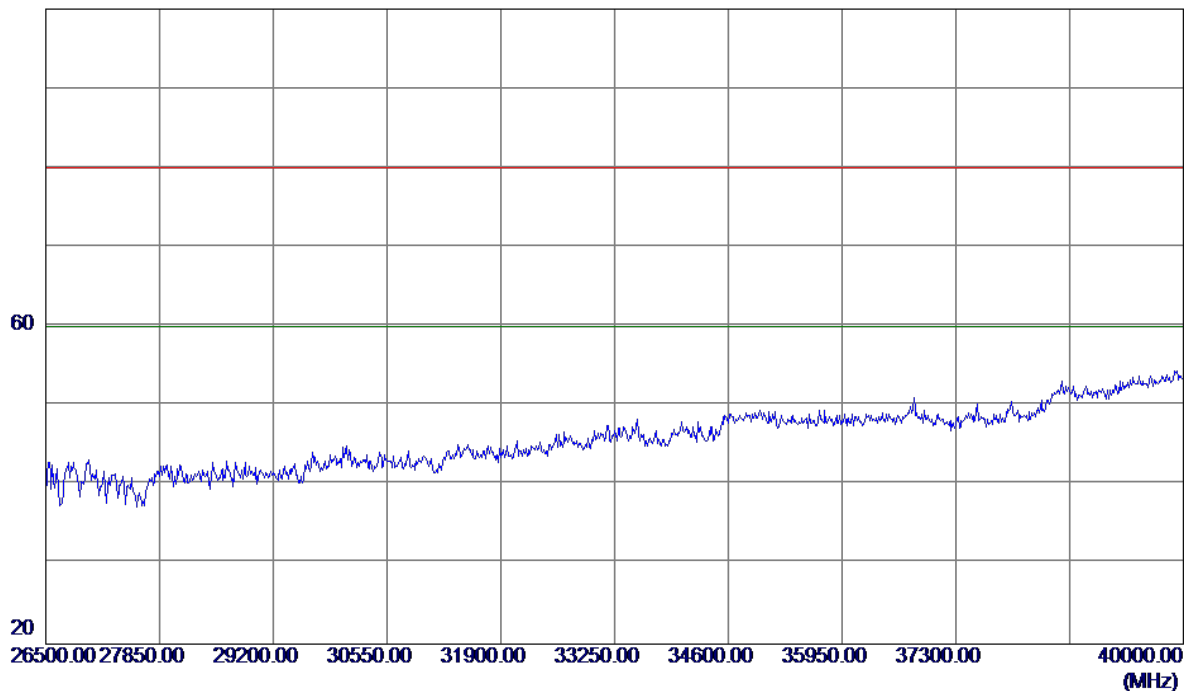


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz

Vertical

125 dBuV/m

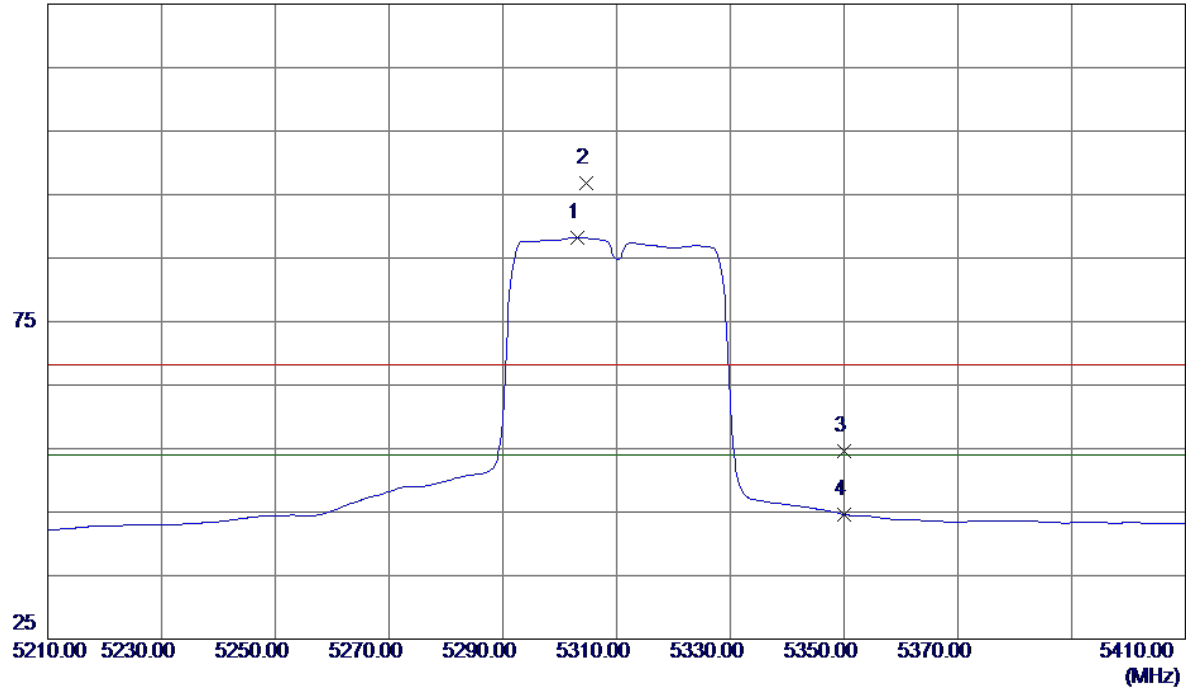


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5303.2000	46.32	41.88	88.20	54.00	34.20	AVG	No Limit
2	5304.6000	54.89	41.89	96.78	68.30	28.48	Peak	No Limit
3	5350.0000	12.40	42.12	54.52	68.30	-13.78	Peak	
4	5350.0000	2.50	42.12	44.62	54.00	-9.38	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Vertical

115 dBuV/m

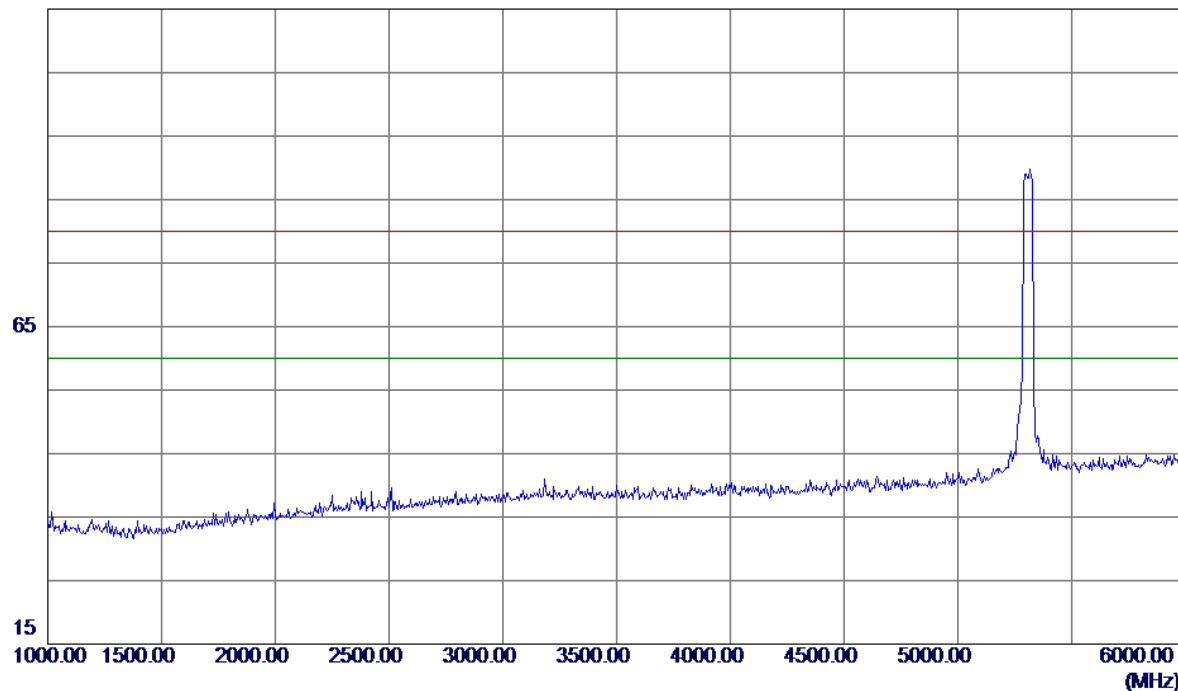

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
	MHz	Level	Factor	ment				
		dBuV/m	dB	dBuV/m	dBuV/m	dB		


Vertical

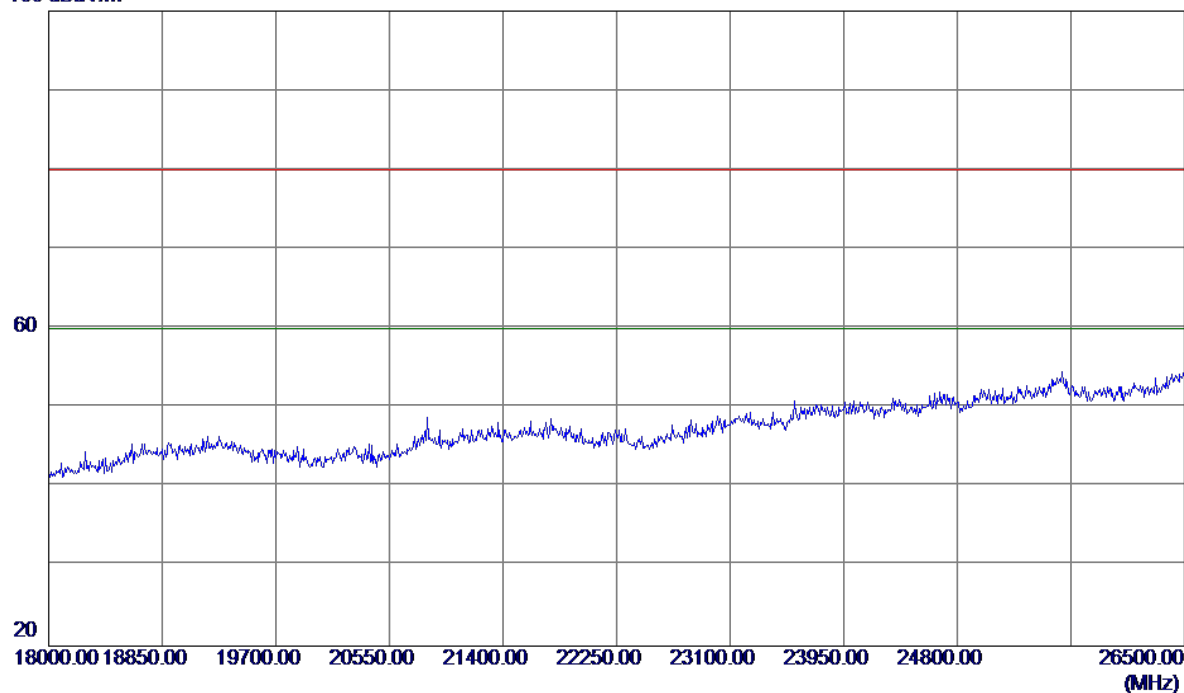Page 354 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX N40 Mode 5310MHz


Horizontal

125 dBuV/m

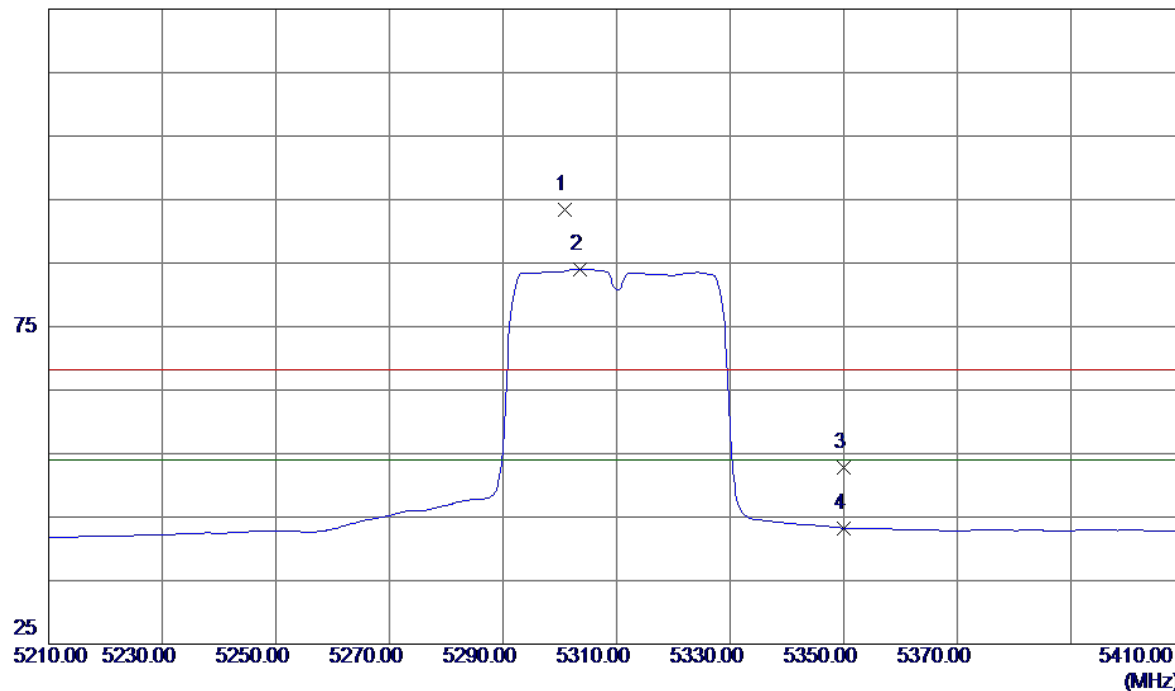


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5300.8000	51.48	41.87	93.35	68.30	25.05	Peak	No Limit
2 *	5303.6000	42.12	41.88	84.00	54.00	30.00	AVG	No Limit
3	5350.0000	10.63	42.12	52.75	68.30	-15.55	Peak	
4	5350.0000	1.14	42.12	43.26	54.00	-10.74	AVG	

Horizontal

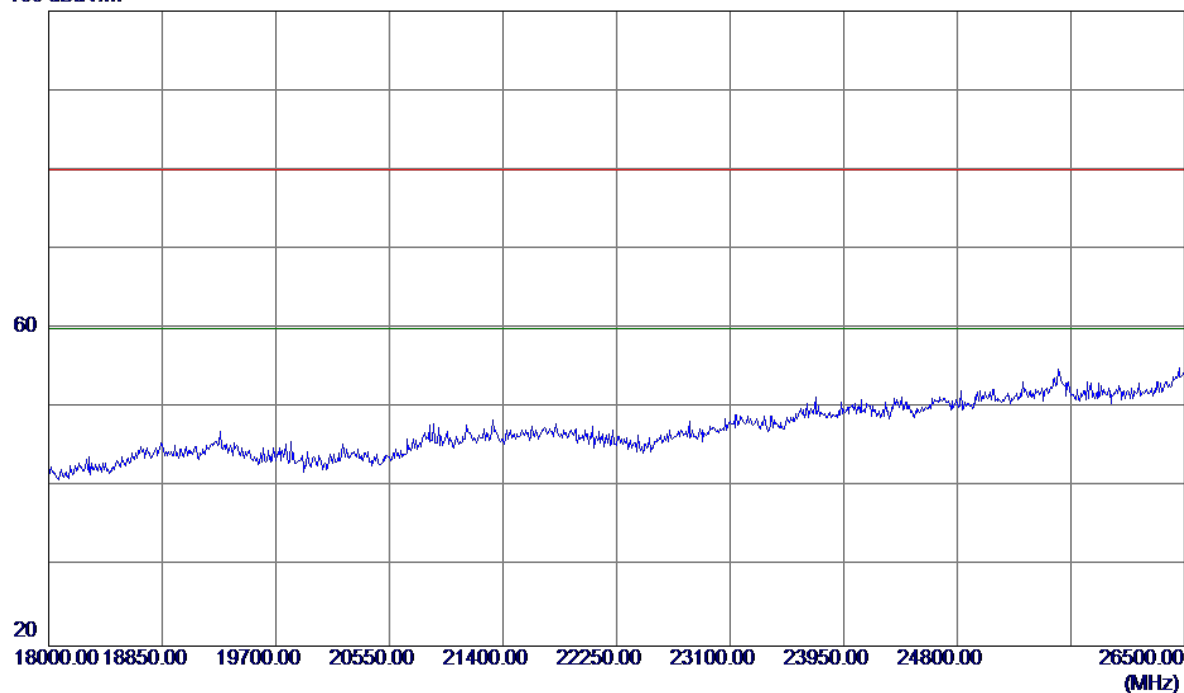Page 359 of 1590


Horizontal

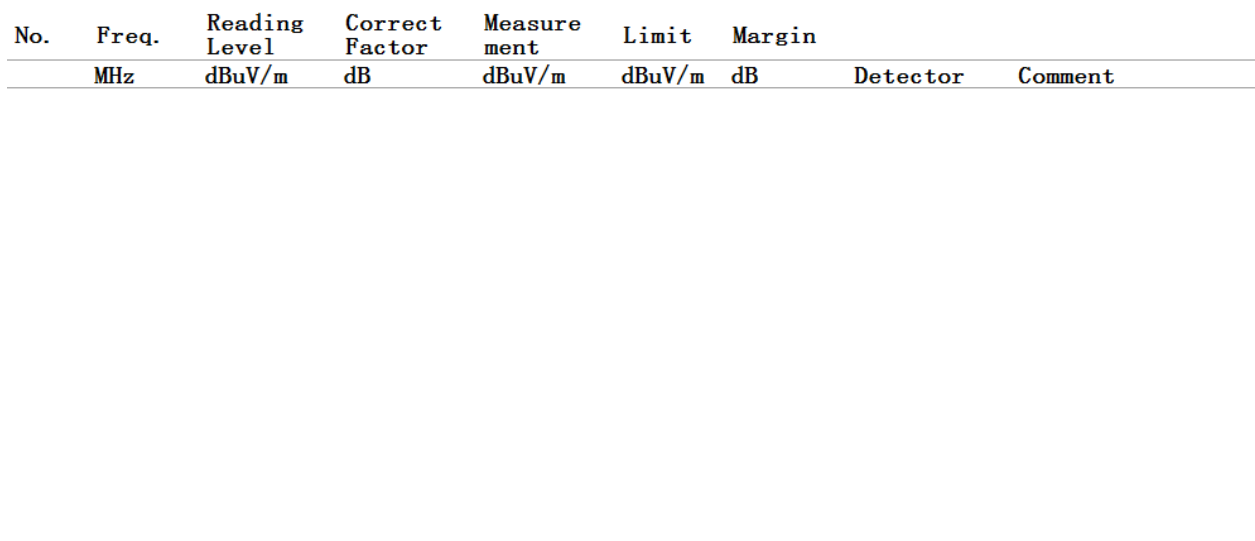

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Vertical

120 dBuV/m

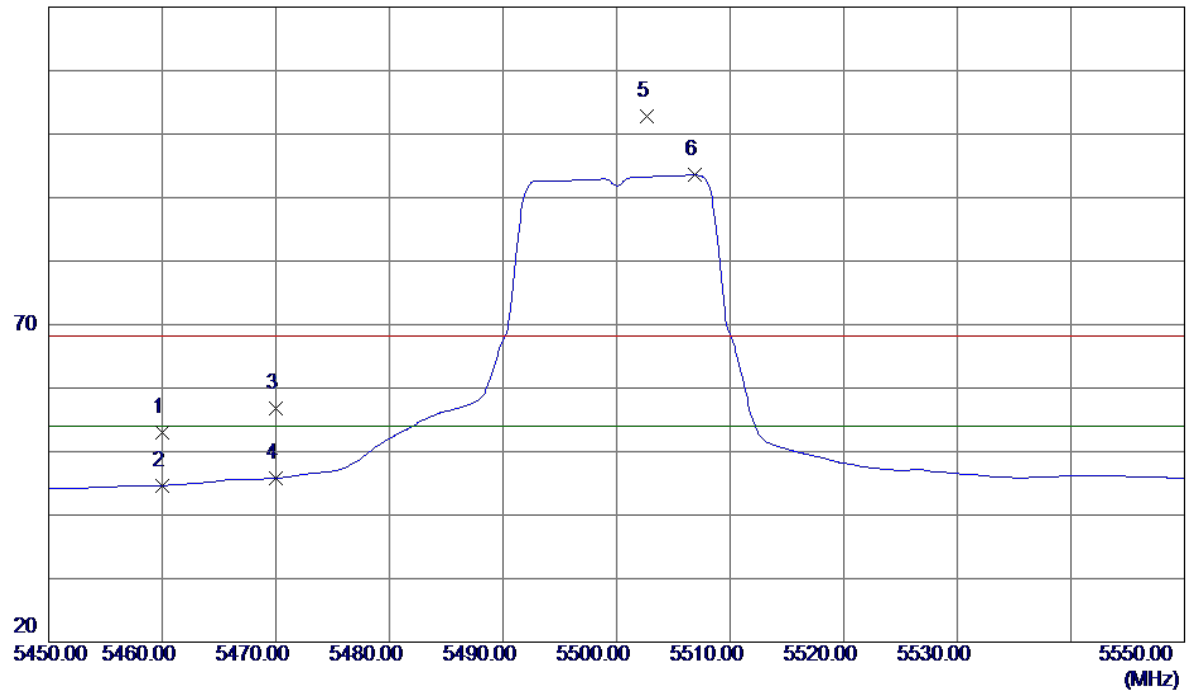


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.36	42.68	53.04	68.30	-15.26	Peak	
2	5460.0000	1.95	42.68	44.63	54.00	-9.37	AVG	
3	5470.0000	13.98	42.73	56.71	68.30	-11.59	Peak	
4	5470.0000	3.16	42.73	45.89	54.00	-8.11	AVG	
5	5502.7000	59.89	42.89	102.78	68.30	34.48	Peak	No Limit
6 *	5506.9000	50.66	42.90	93.56	54.00	39.56	AVG	No Limit

Vertical

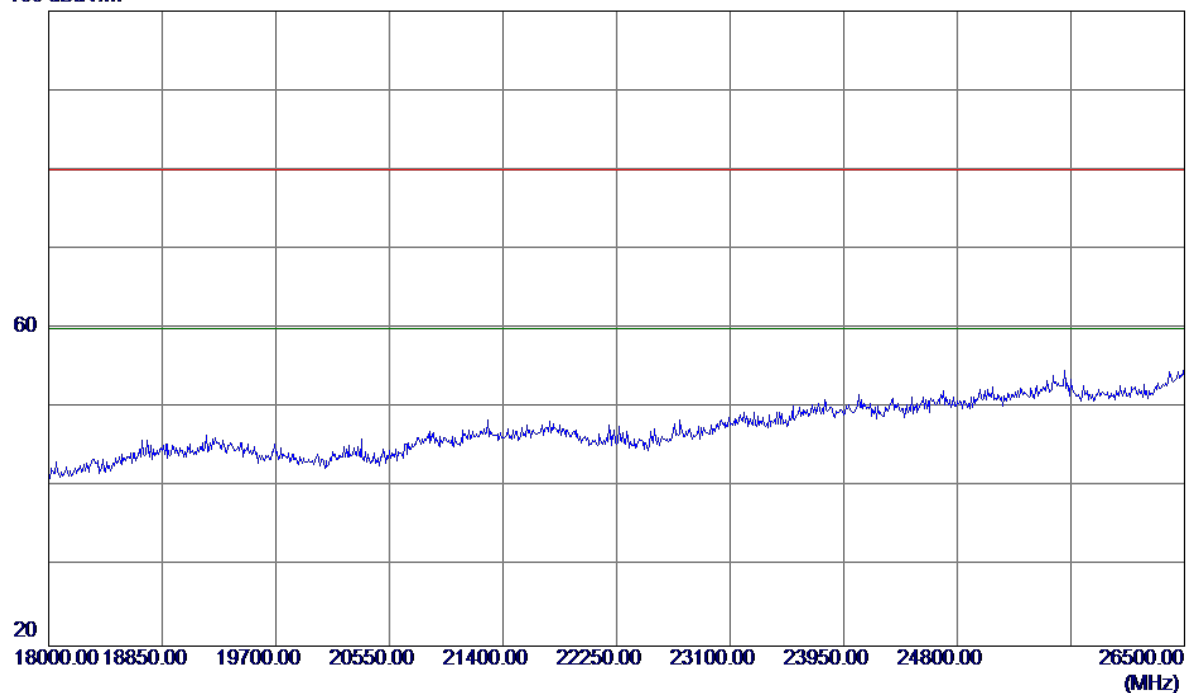Page 364 of 1590


Vertical

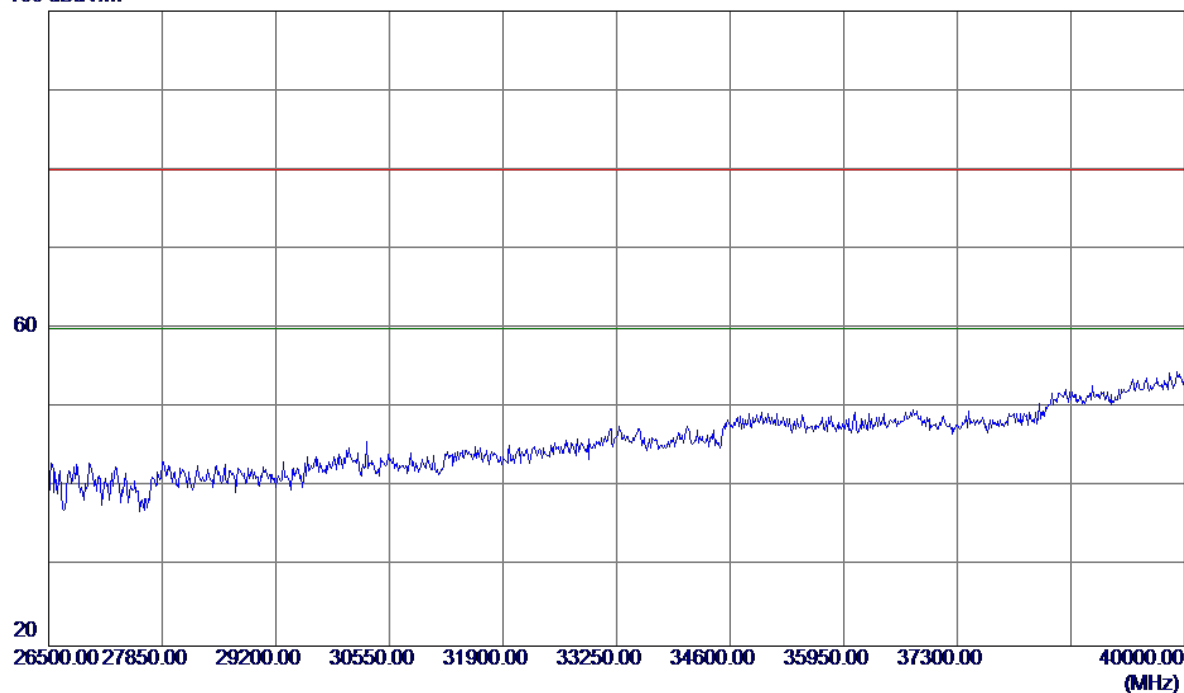Page 365 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz


Horizontal

125 dBuV/m

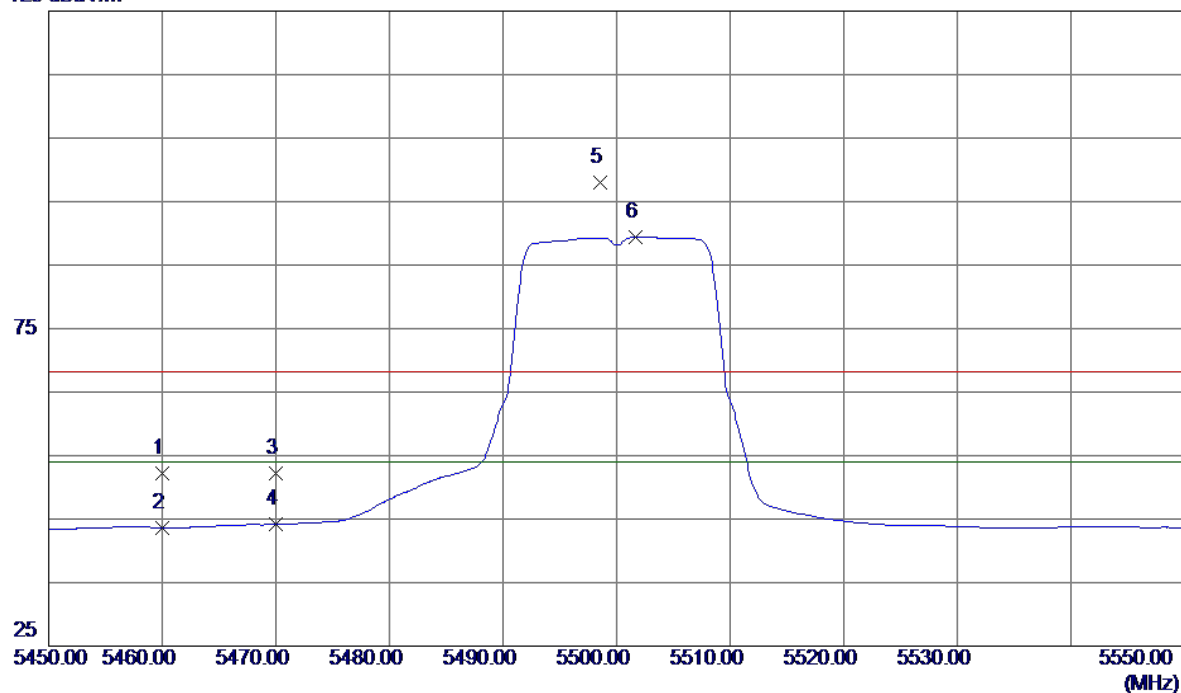


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	9.55	42.68	52.23	68.30	-16.07	Peak	
2	5460.0000	0.97	42.68	43.65	54.00	-10.35	AVG	
3	5470.0000	9.43	42.73	52.16	68.30	-16.14	Peak	
4	5470.0000	1.40	42.73	44.13	54.00	-9.87	AVG	
5	5498.6000	55.18	42.87	98.05	68.30	29.75	Peak	No Limit
6 *	5501.7000	46.47	42.89	89.36	54.00	35.36	AVG	No Limit

Horizontal

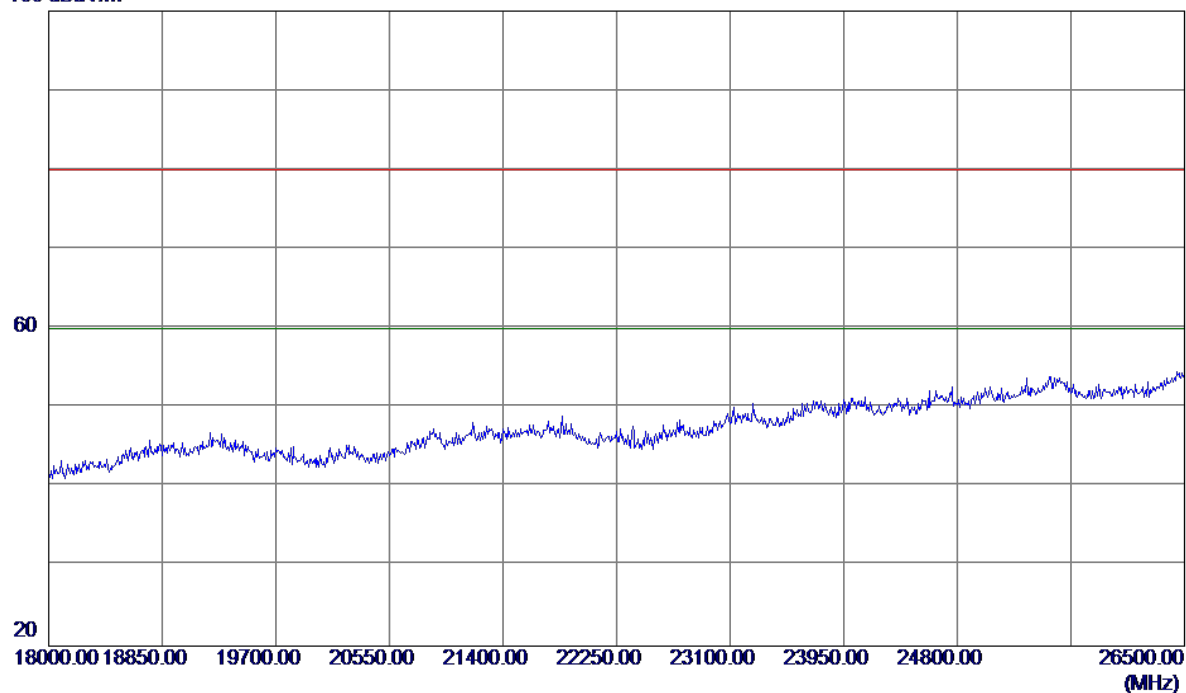Page 369 of 1590


Horizontal

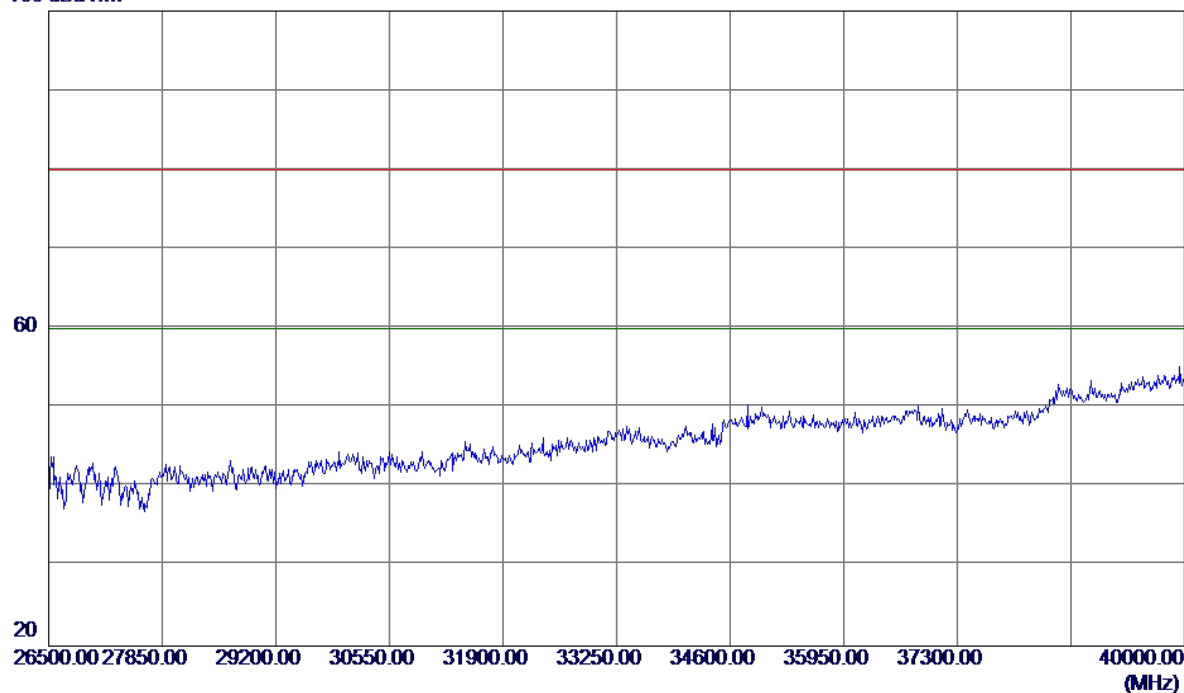Page 370 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

120 dBuV/m

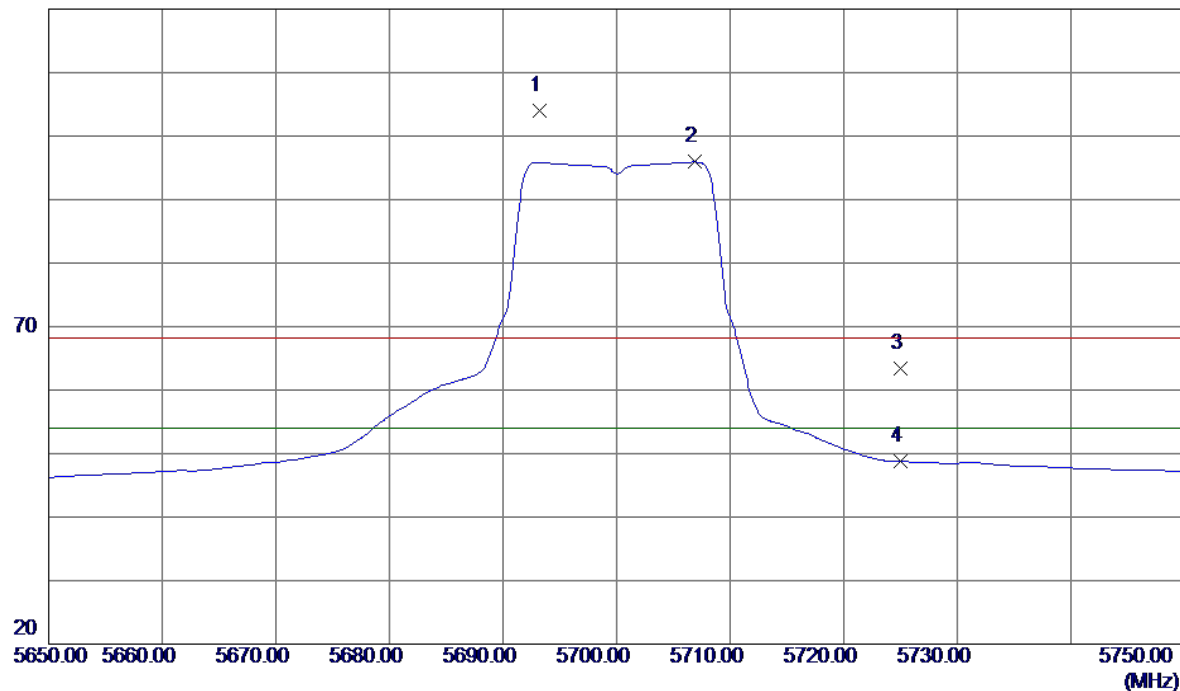


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5693.2000	60.56	43.46	104.02	68.30	35.72	Peak	No Limit
2 *	5706.9000	52.41	43.50	95.91	54.00	41.91	AVG	No Limit
3	5725.0000	19.77	43.56	63.33	68.30	-4.97	Peak	
4	5725.0000	5.19	43.56	48.75	54.00	-5.25	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

115 dBuV/m

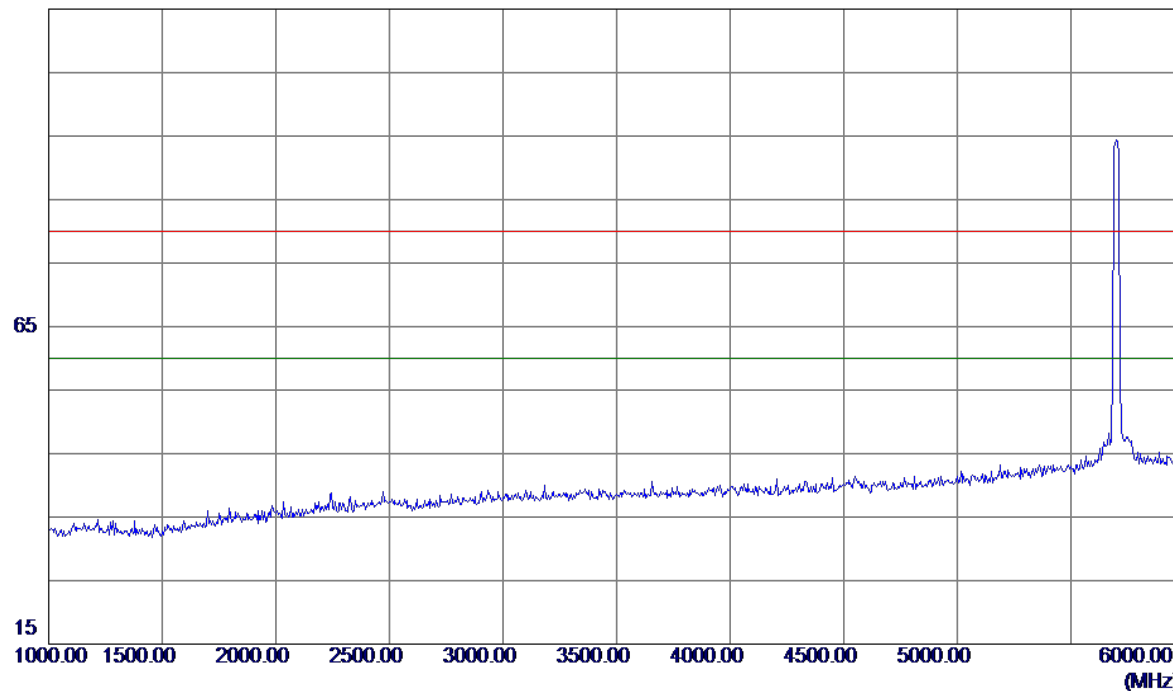


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Vertical

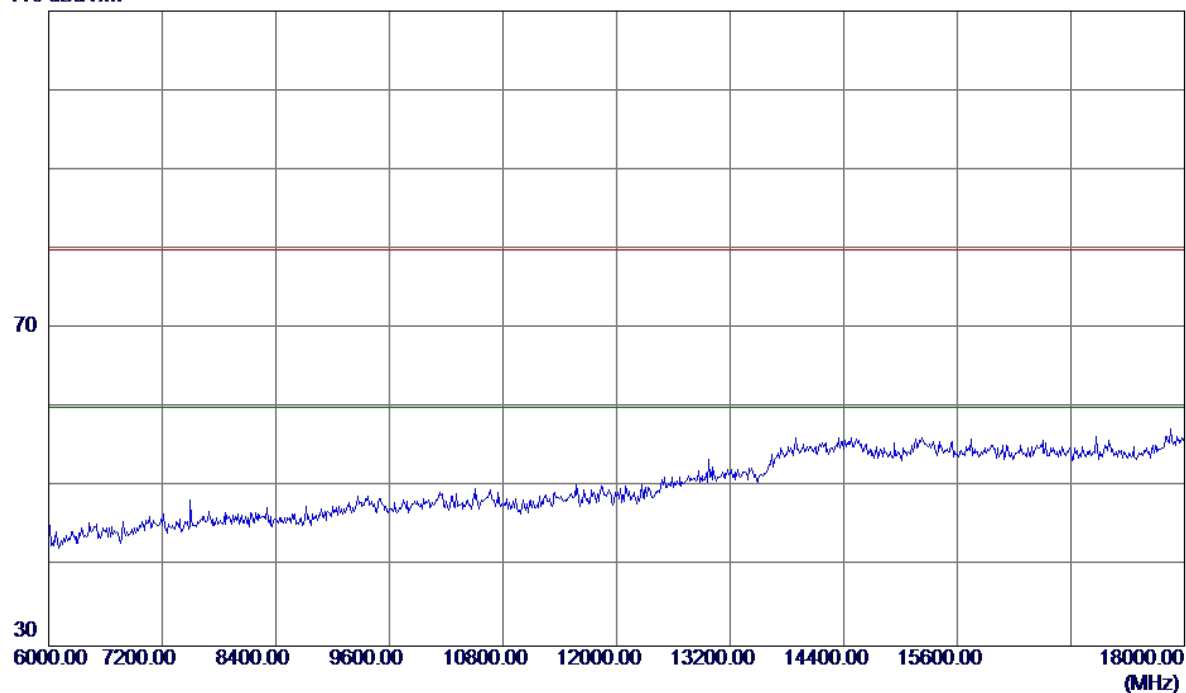
Page 373 of 1590

Vertical

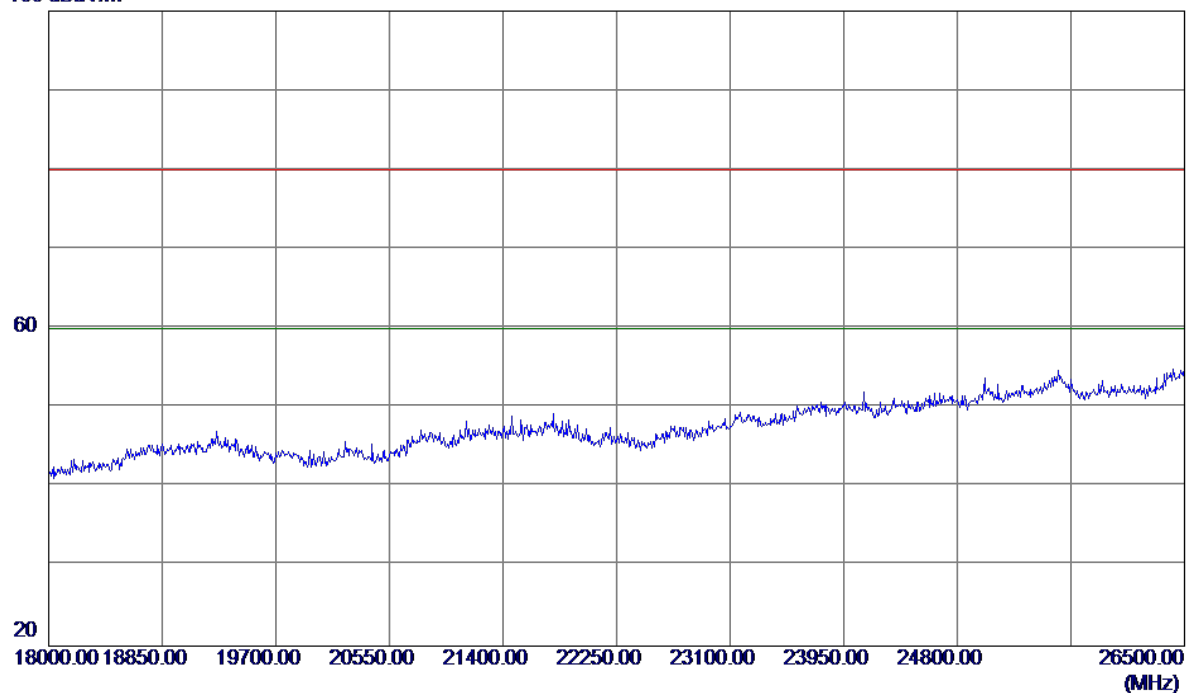

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Vertical

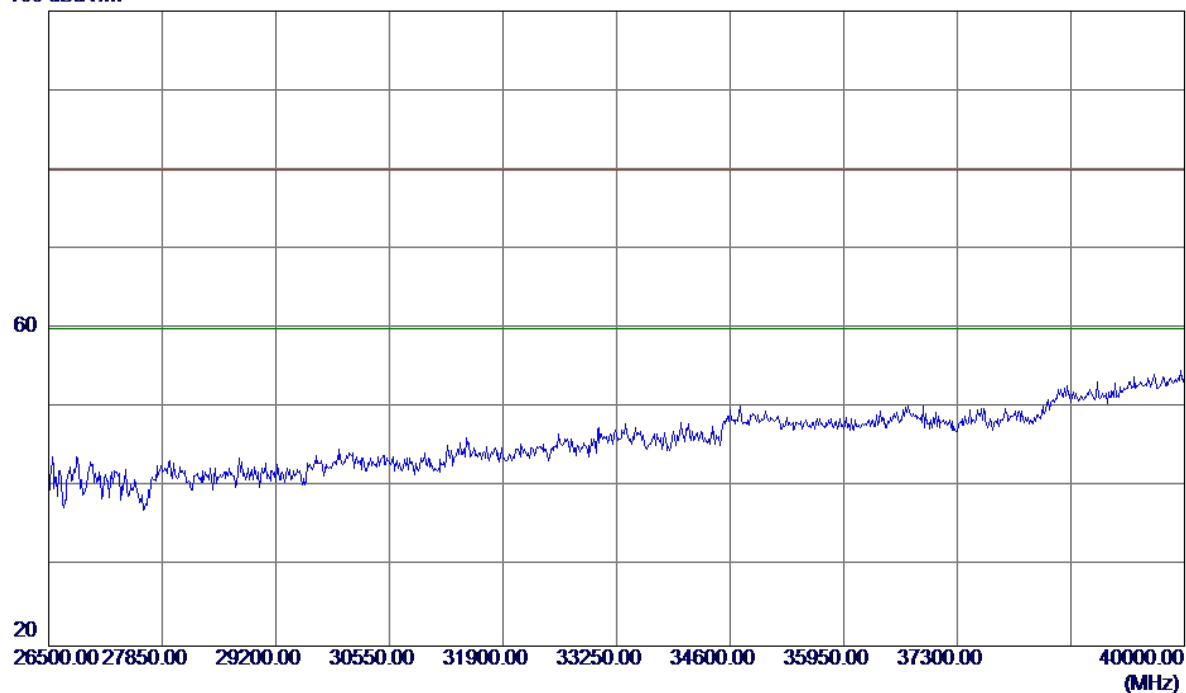


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Horizontal

125 dBuV/m

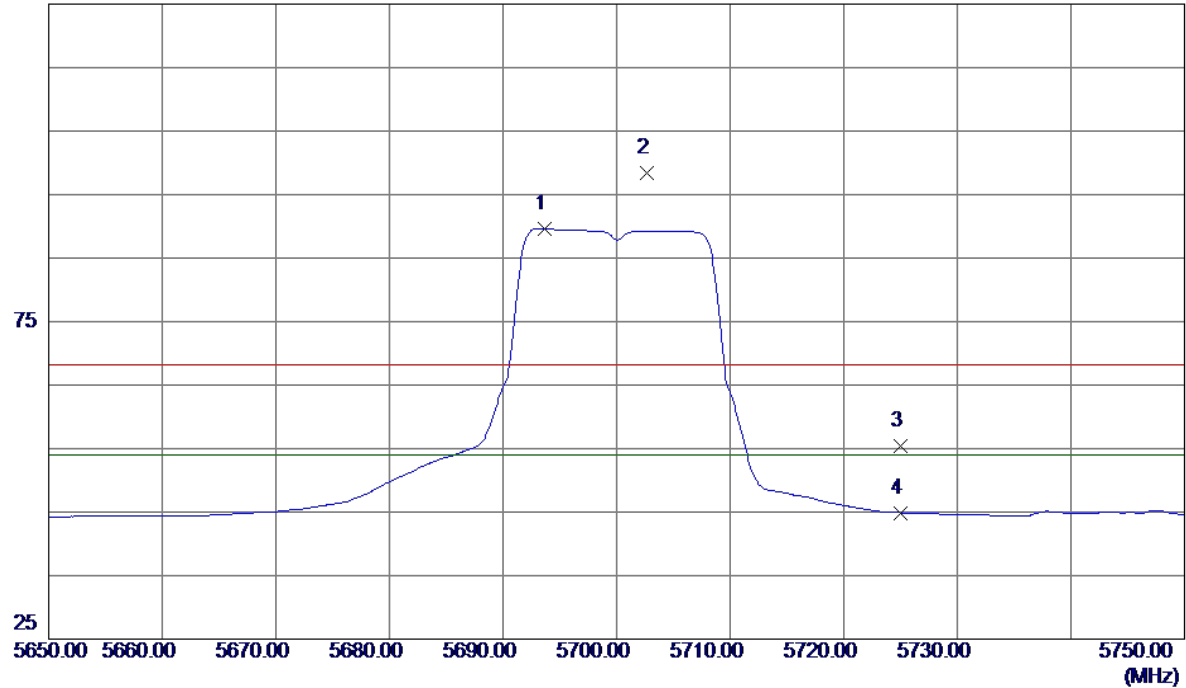


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5693.7000	46.09	43.46	89.55	54.00	35.55	AVG	No Limit
2	5702.7000	54.98	43.49	98.47	68.30	30.17	Peak	No Limit
3	5725.0000	11.87	43.56	55.43	68.30	-12.87	Peak	
4	5725.0000	1.33	43.56	44.89	54.00	-9.11	AVG	


Horizontal

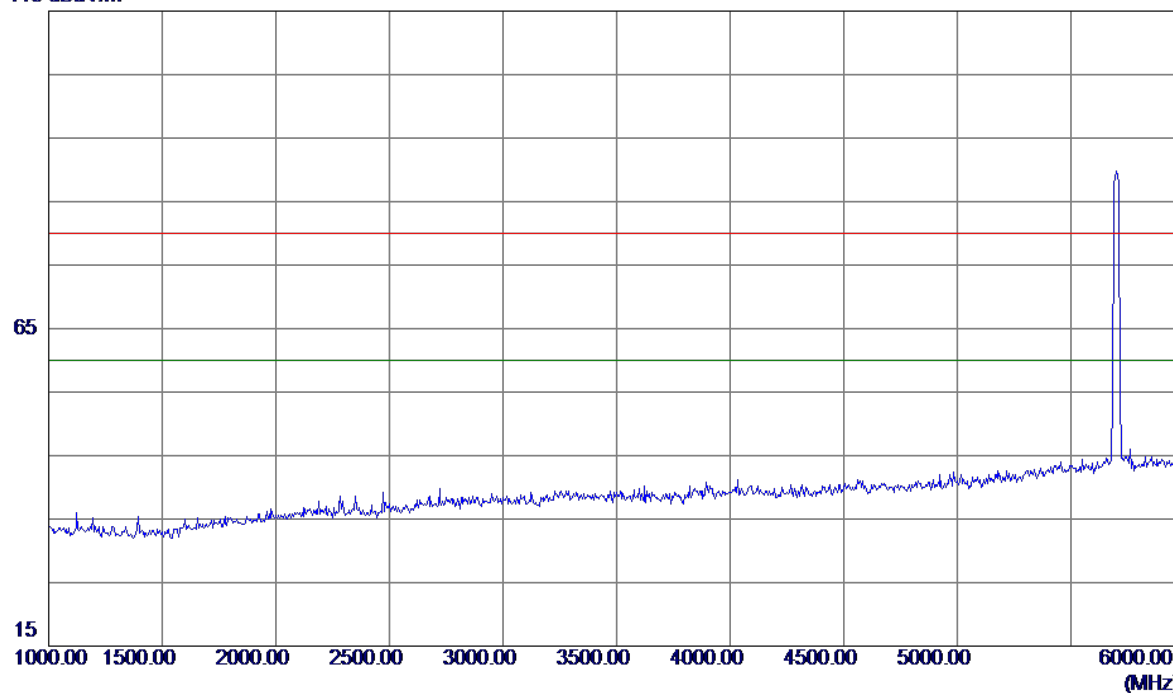Page 377 of 1590


Horizontal

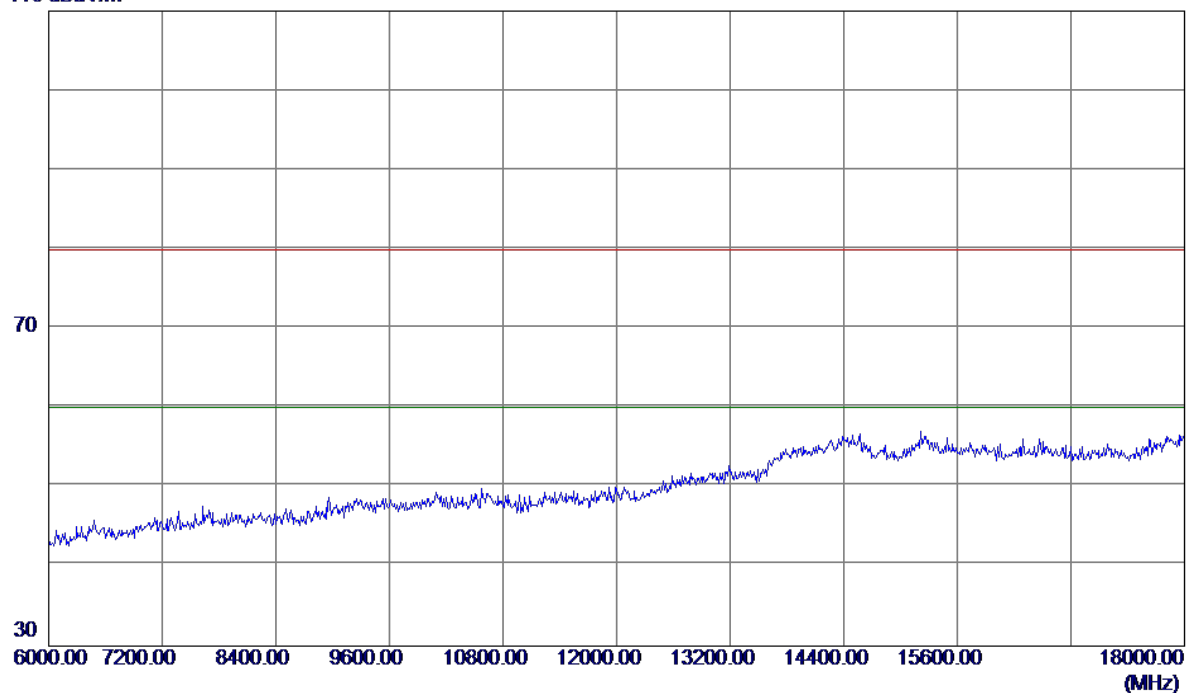Page 378 of 1590

Horizontal

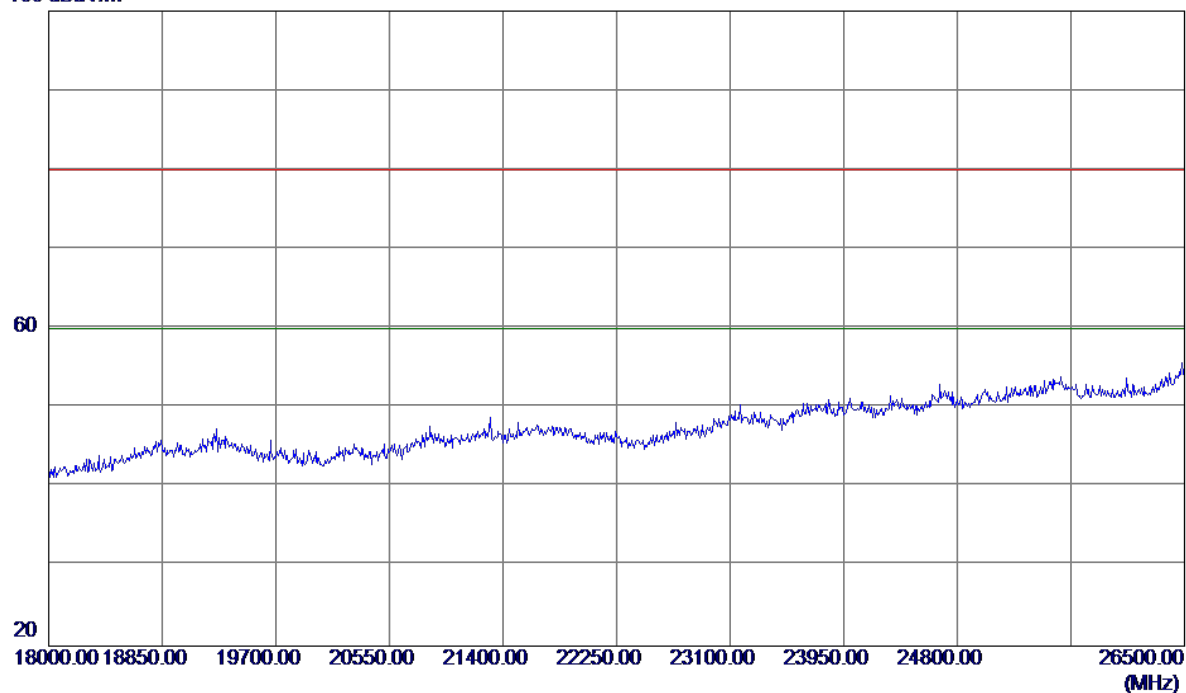Page 379 of 1590


Horizontal

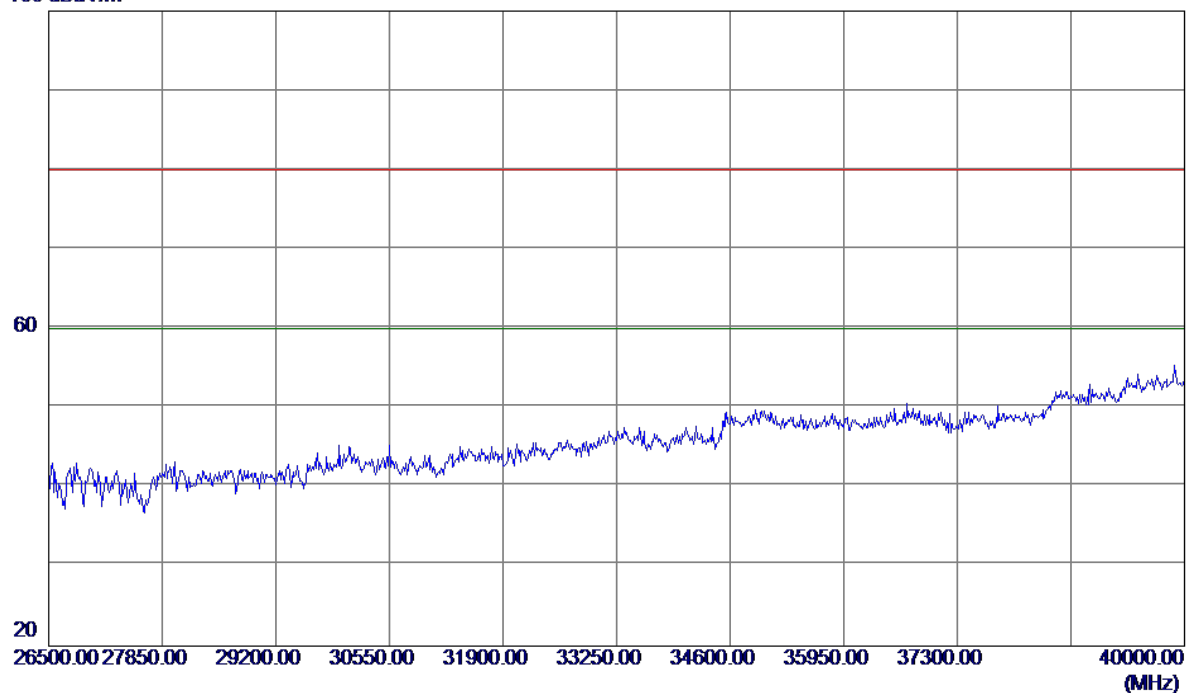Page 380 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

125 dBuV/m

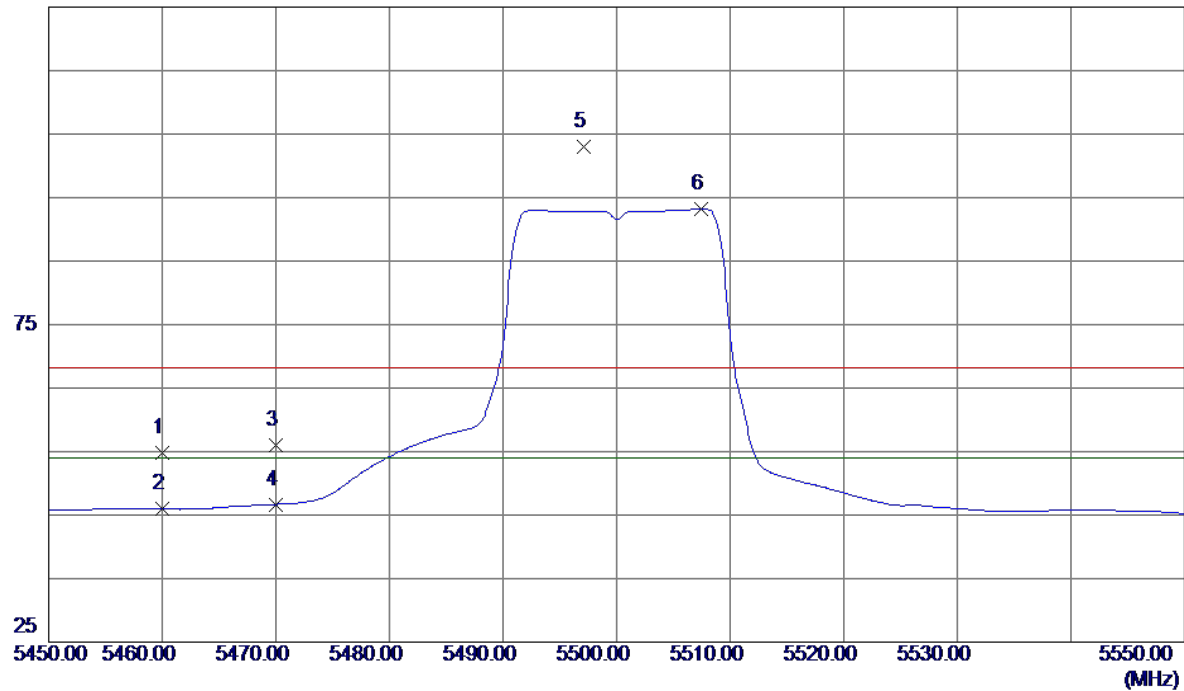

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	12.18	42.68	54.86	68.30	-13.44	Peak	
2	5460.0000	3.23	42.68	45.91	54.00	-8.09	AVG	
3	5470.0000	13.19	42.73	55.92	68.30	-12.38	Peak	
4	5470.0000	3.95	42.73	46.68	54.00	-7.32	AVG	
5	5497.1000	60.07	42.87	102.94	68.30	34.64	Peak	No Limit
6 *	5507.4000	50.29	42.90	93.19	54.00	39.19	AVG	No Limit


Vertical

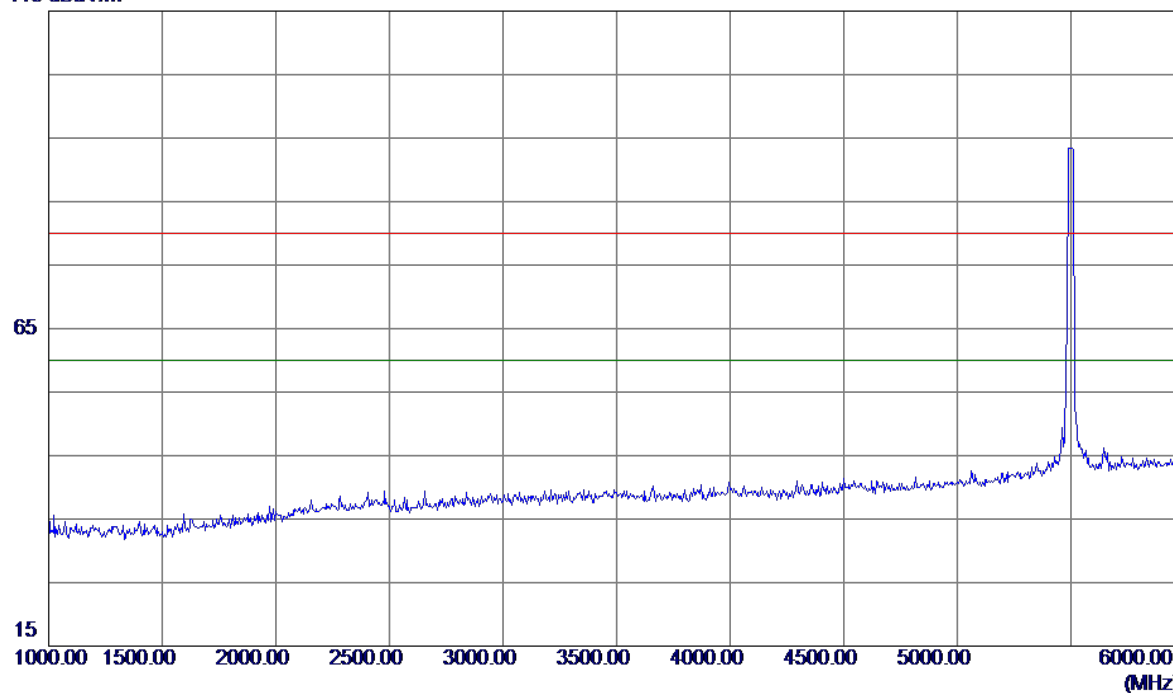Page 382 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

110 dBuV/m

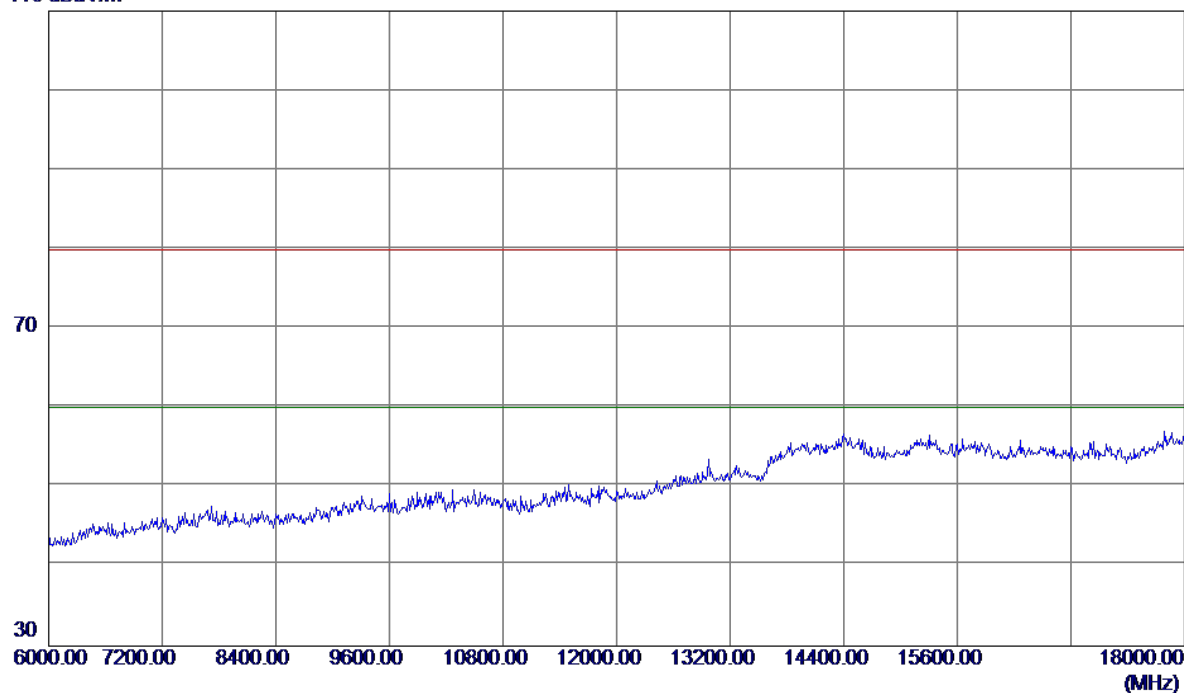


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Vertical

100 dBuV/m

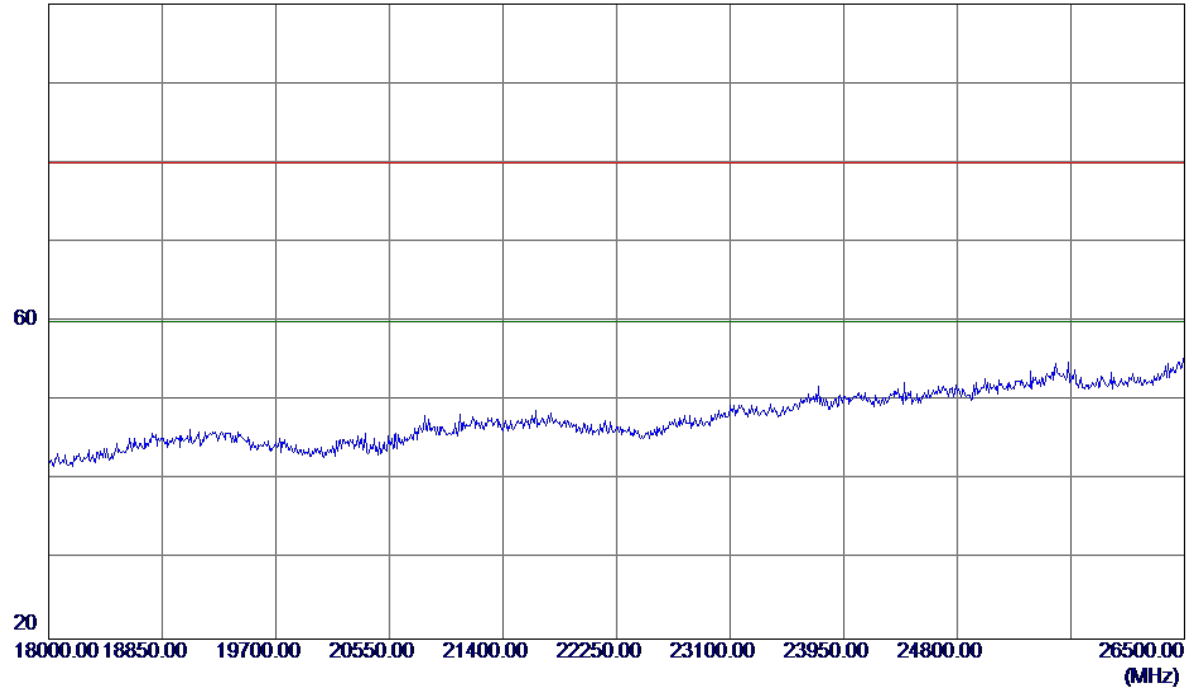

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
				</				


Vertical

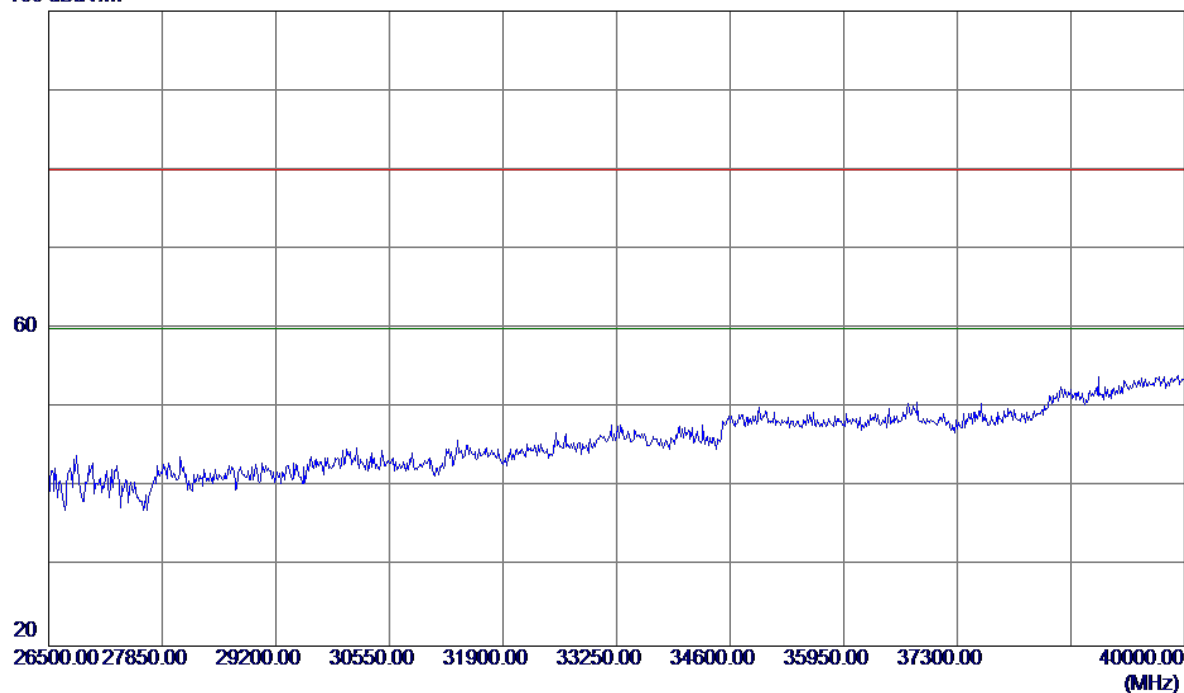Page 385 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

125 dBuV/m

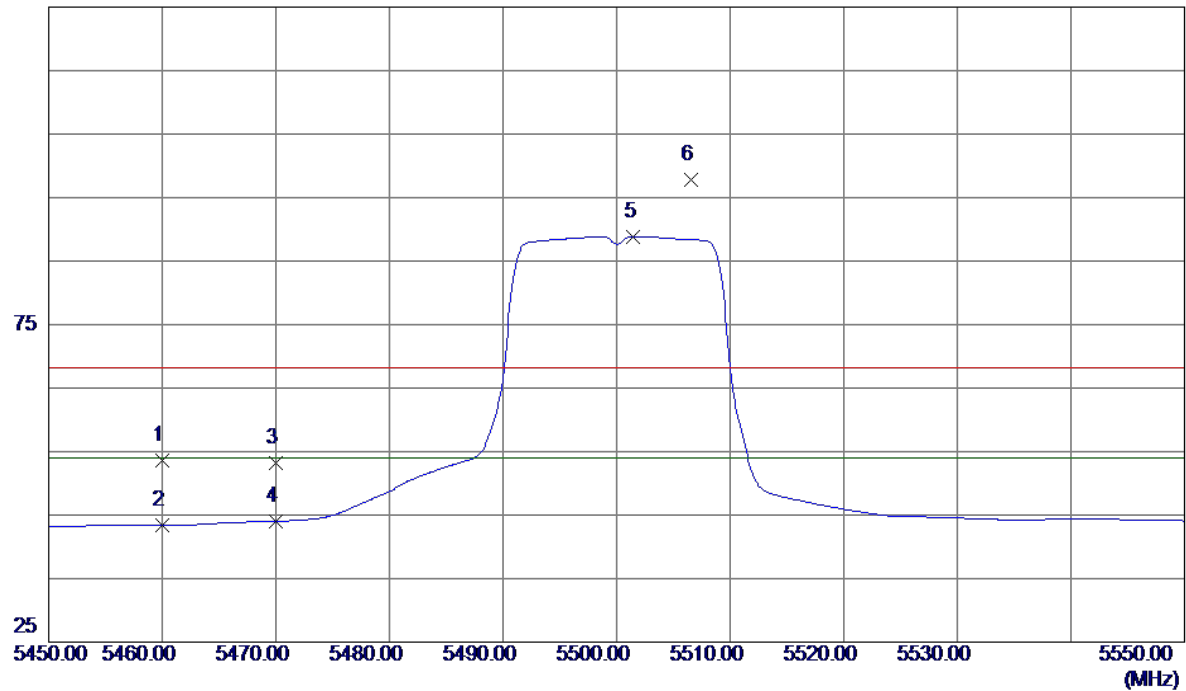

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	10.87	42.68	53.55	68.30	-14.75	Peak	
2	5460.0000	0.69	42.68	43.37	54.00	-10.63	AVG	
3	5470.0000	10.49	42.73	53.22	68.30	-15.08	Peak	
4	5470.0000	1.29	42.73	44.02	54.00	-9.98	AVG	
5 *	5501.5000	45.96	42.88	88.84	54.00	34.84	AVG	No Limit
6	5506.6000	54.85	42.90	97.75	68.30	29.45	Peak	No Limit

Horizontal

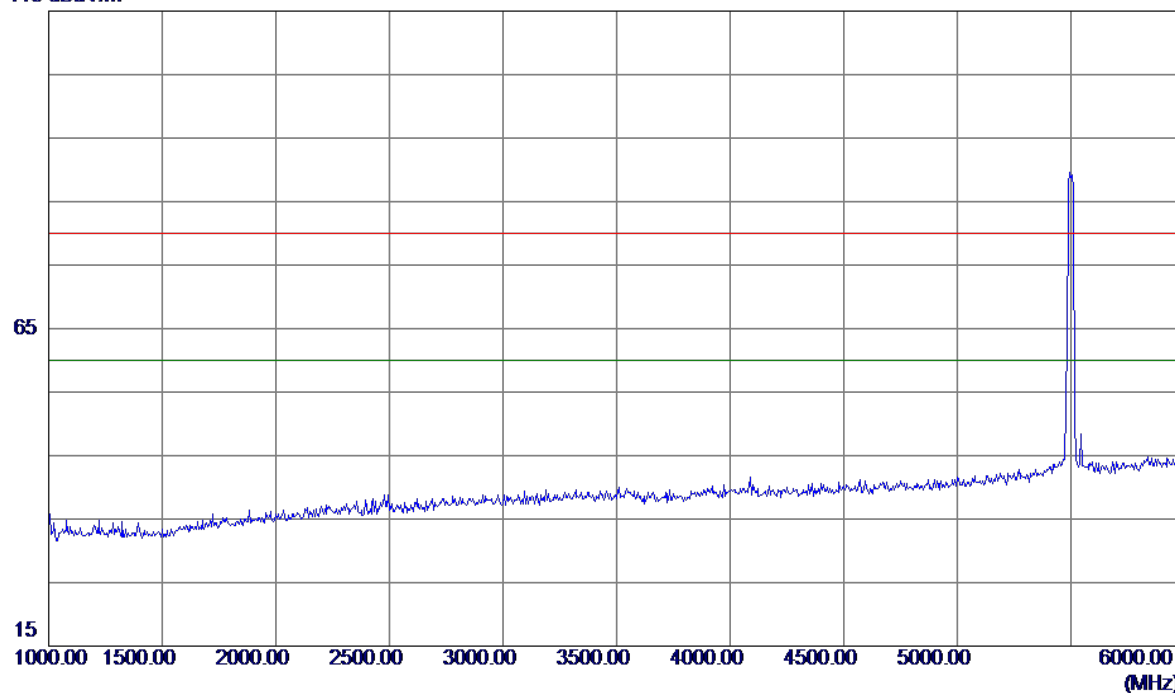


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz


Horizontal

110 dBuV/m

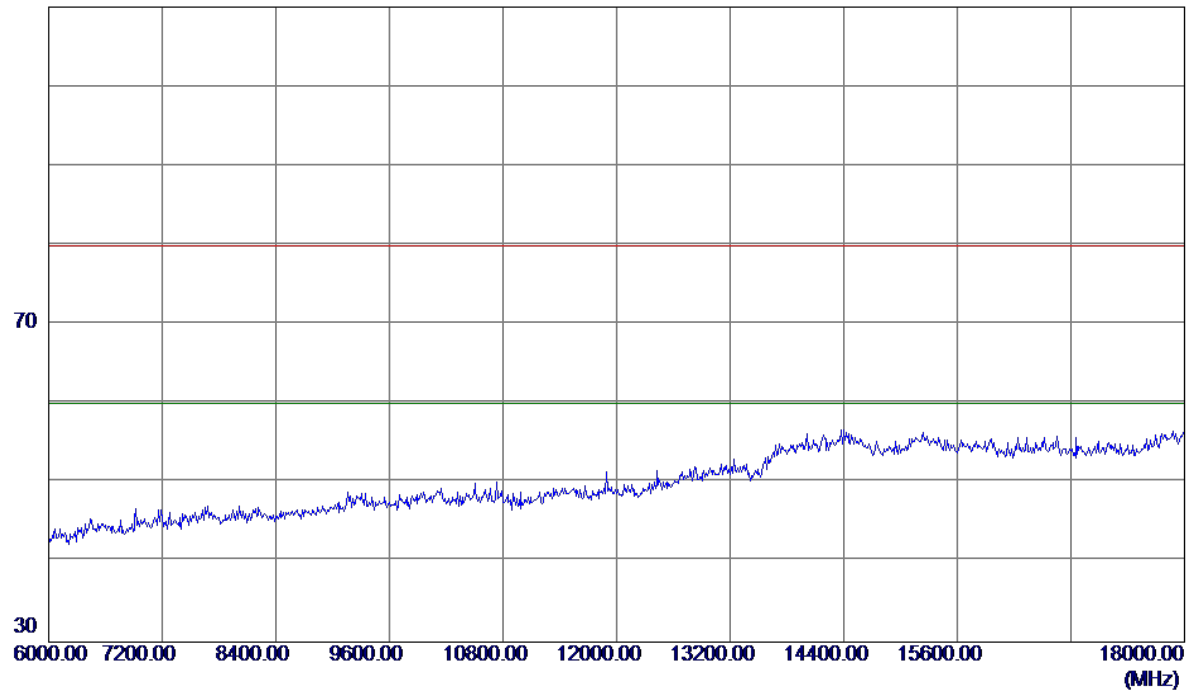


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

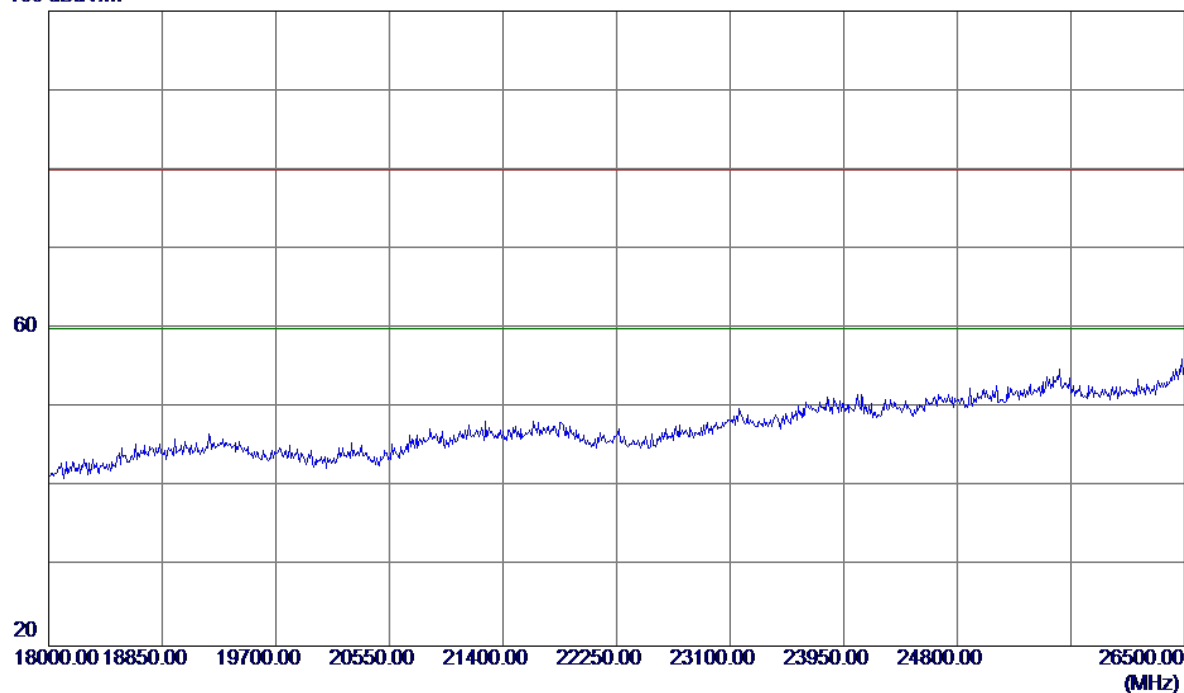Page 389 of 1590


Horizontal

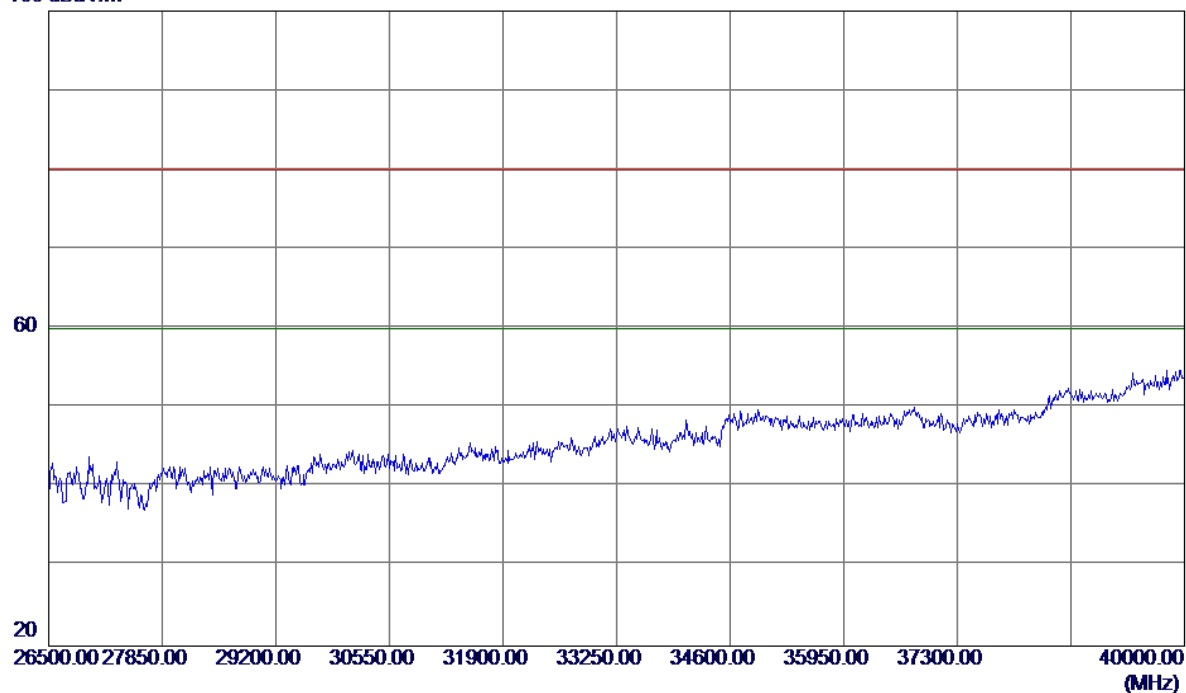Page 390 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Vertical

125 dBuV/m

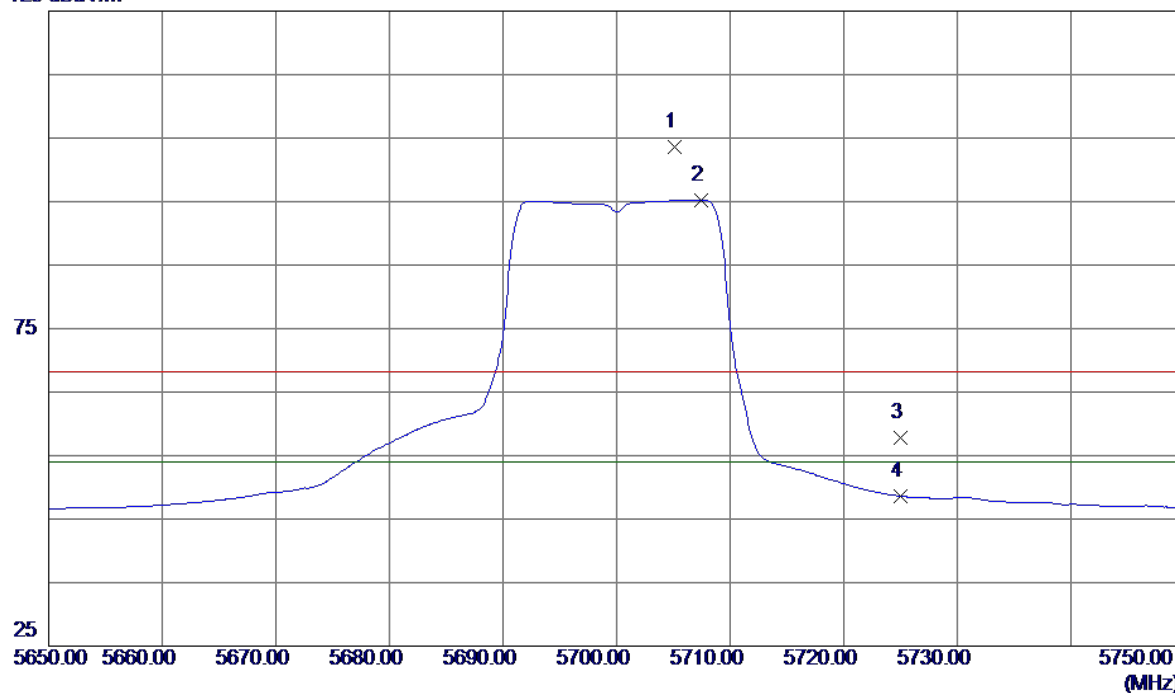


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5705.1000	60.19	43.50	103.69	68.30	35.39	Peak	No Limit
2 *	5707.4000	51.68	43.51	95.19	54.00	41.19	AVG	No Limit
3	5725.0000	14.32	43.56	57.88	68.30	-10.42	Peak	
4	5725.0000	5.05	43.56	48.61	54.00	-5.39	AVG	

Vertical

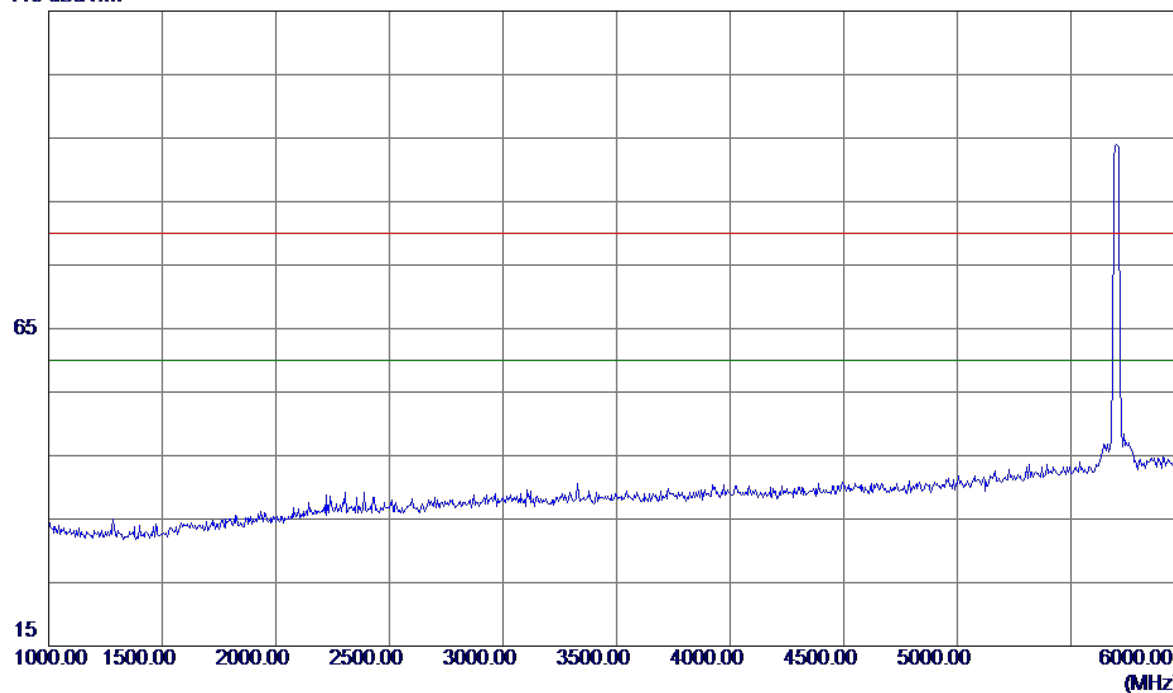
Page 392 of 1590

Vertical

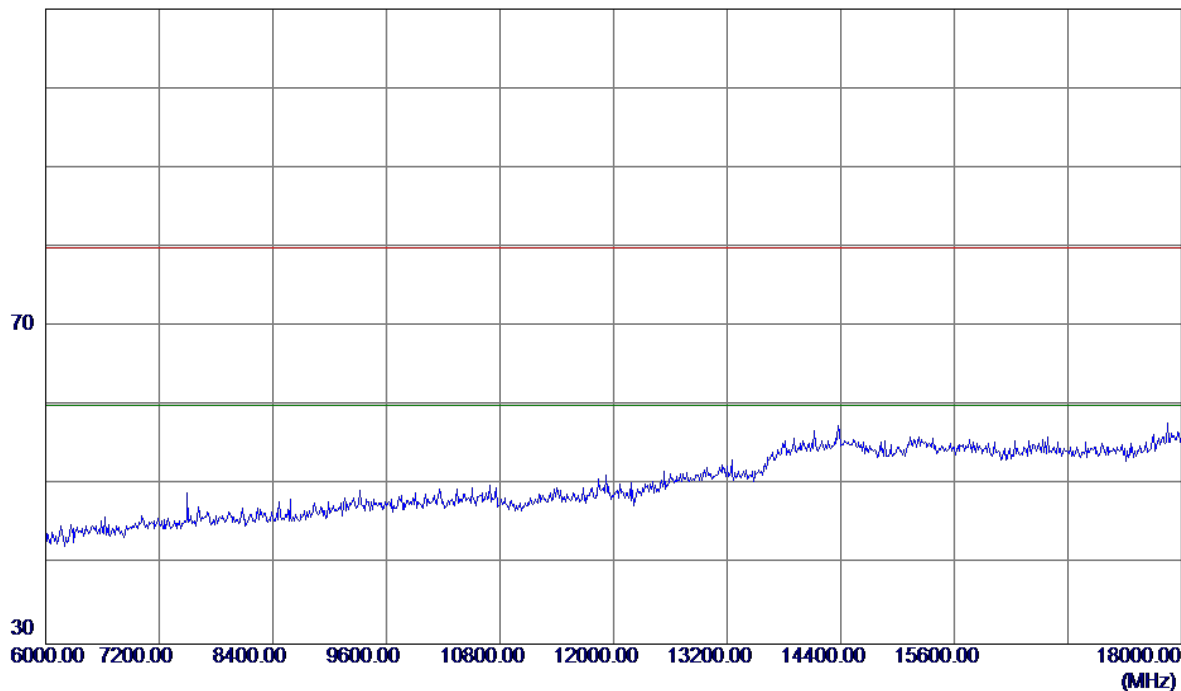


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Vertical

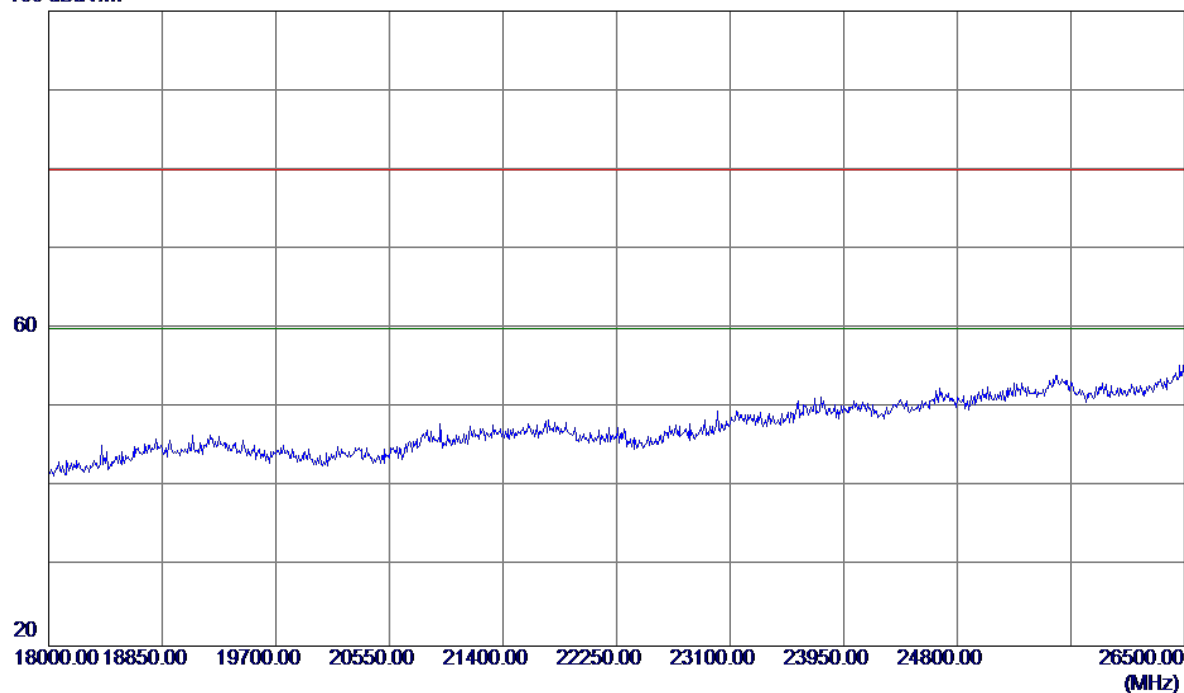Page 394 of 1590


Vertical

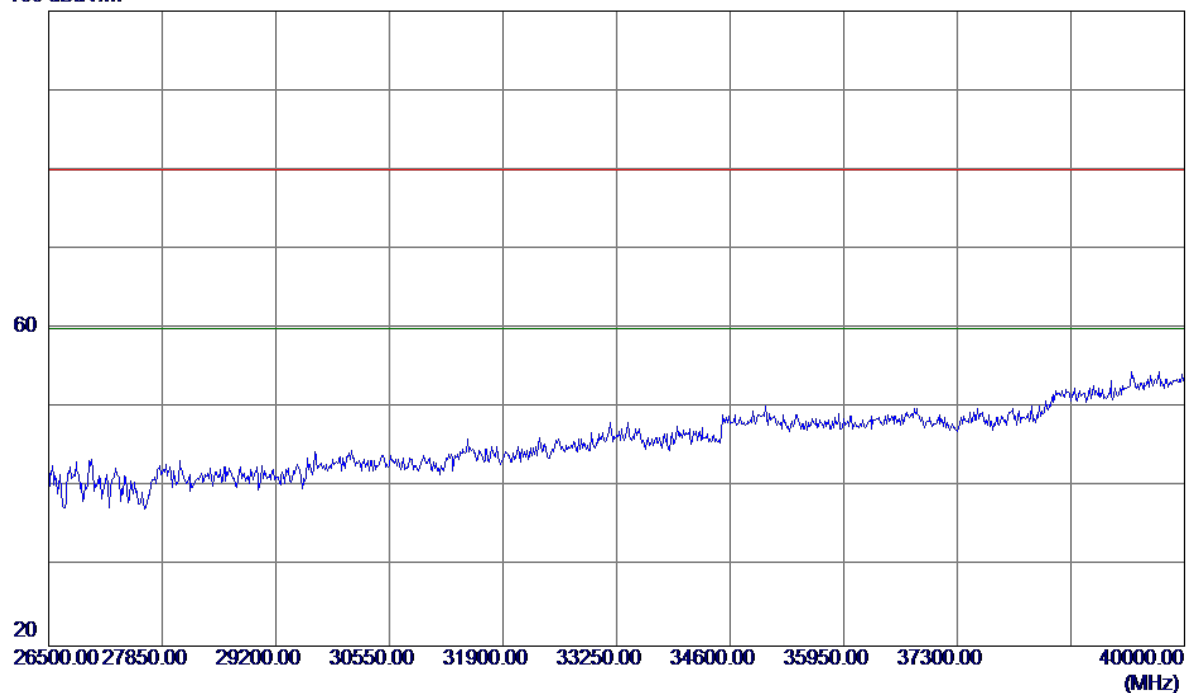Page 395 of 1590

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

125 dBuV/m

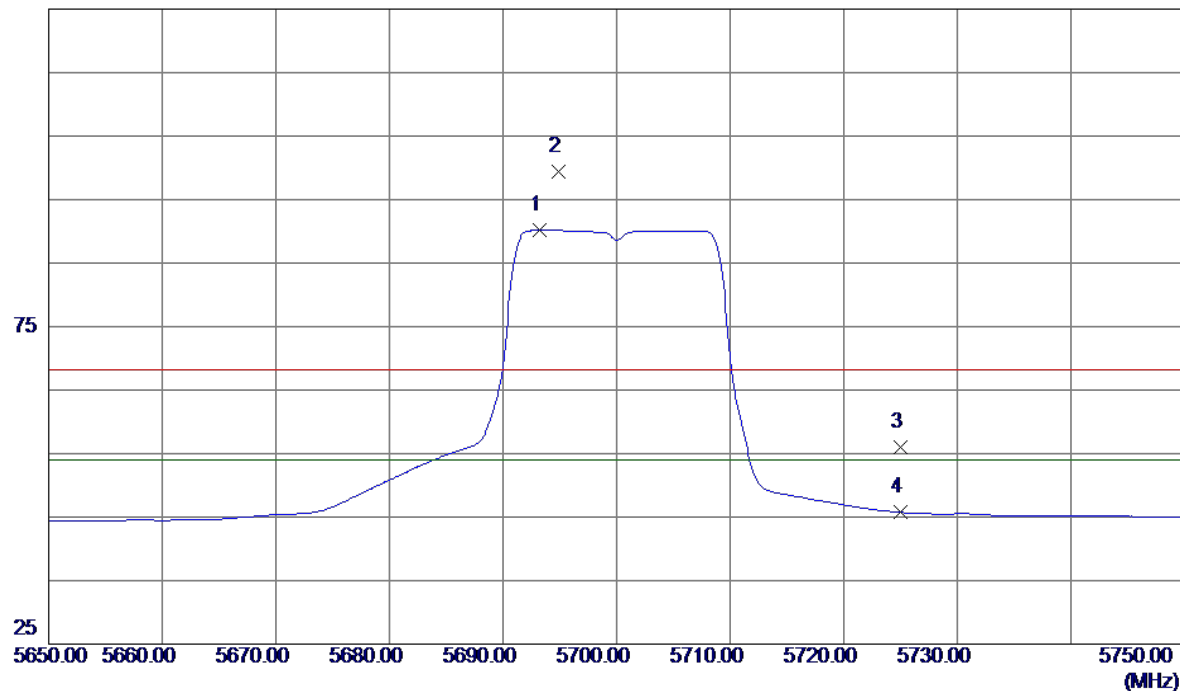


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5693.2000	46.71	43.46	90.17	54.00	36.17	AVG	No Limit
2	5694.9000	55.84	43.47	99.31	68.30	31.01	Peak	No Limit
3	5725.0000	12.50	43.56	56.06	68.30	-12.24	Peak	
4	5725.0000	2.16	43.56	45.72	54.00	-8.28	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz


Horizontal

115 dBuV/m

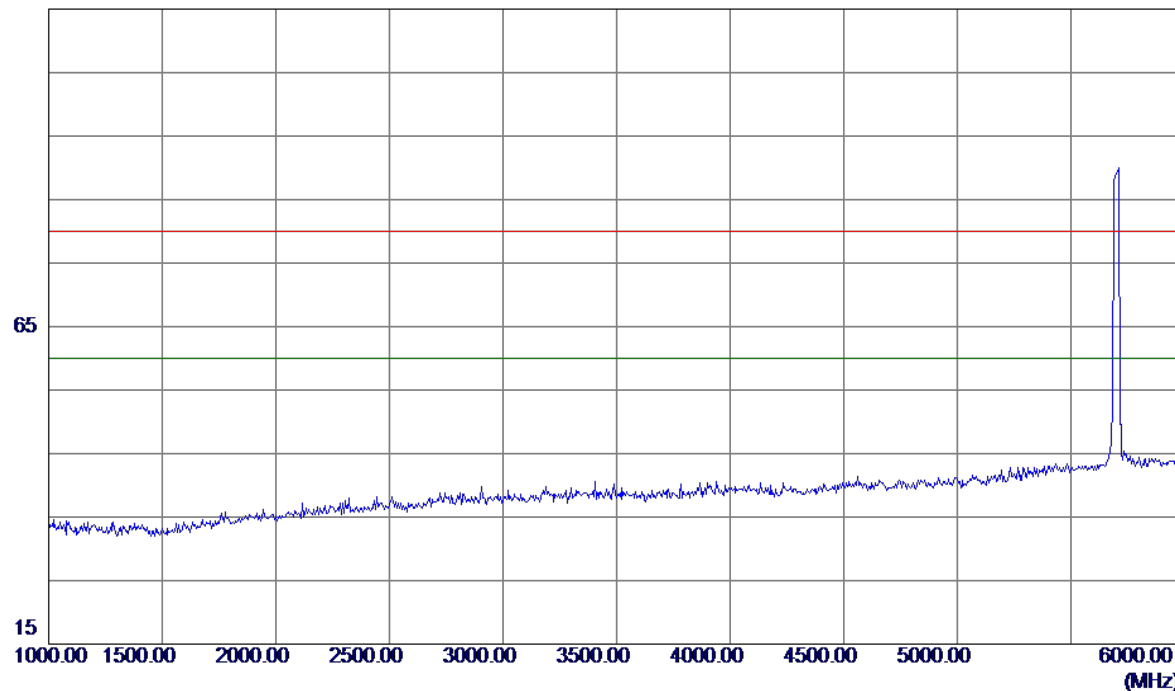


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		

Horizontal

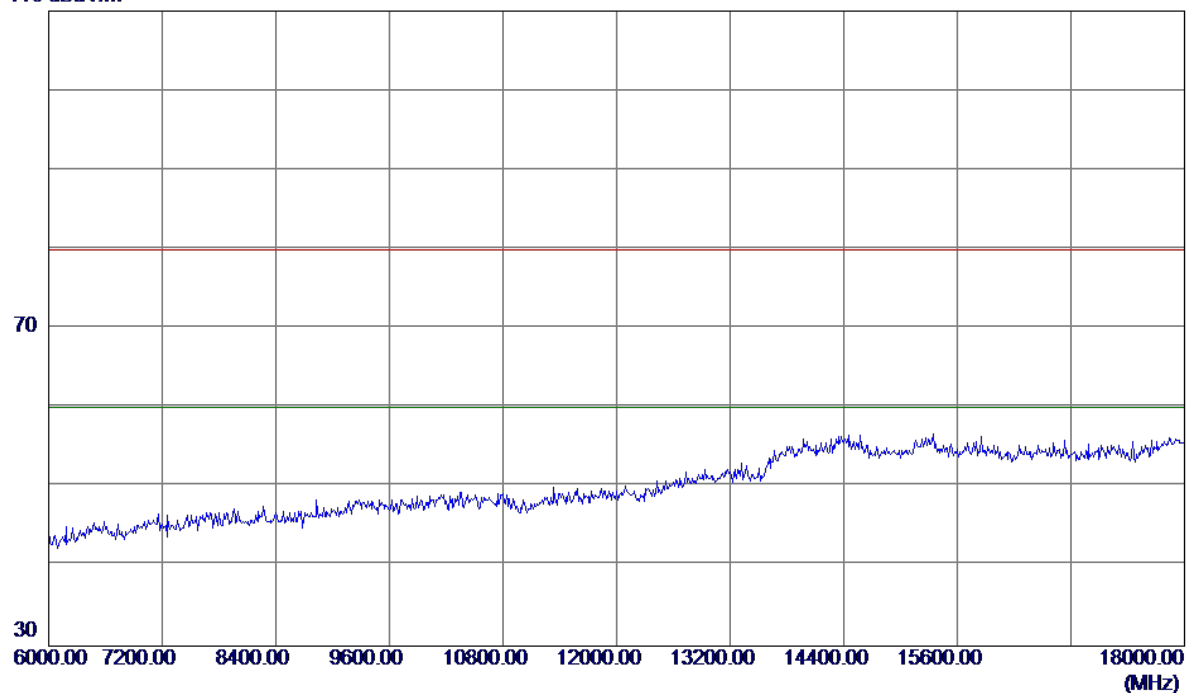


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

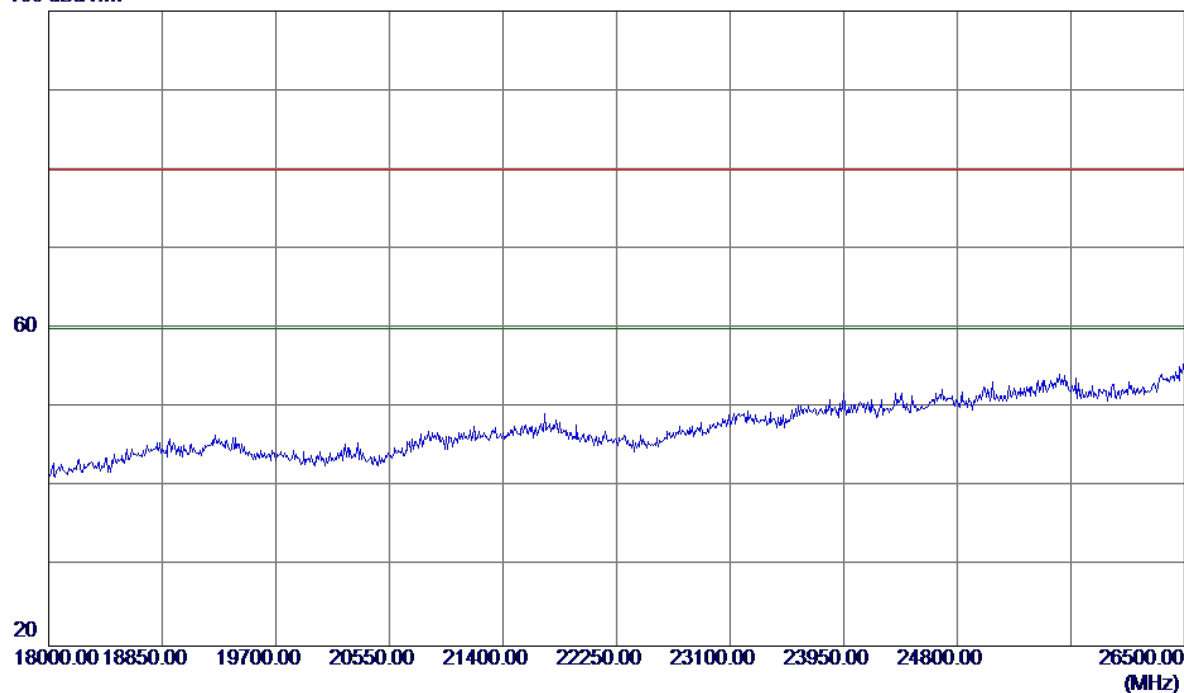

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment

Horizontal

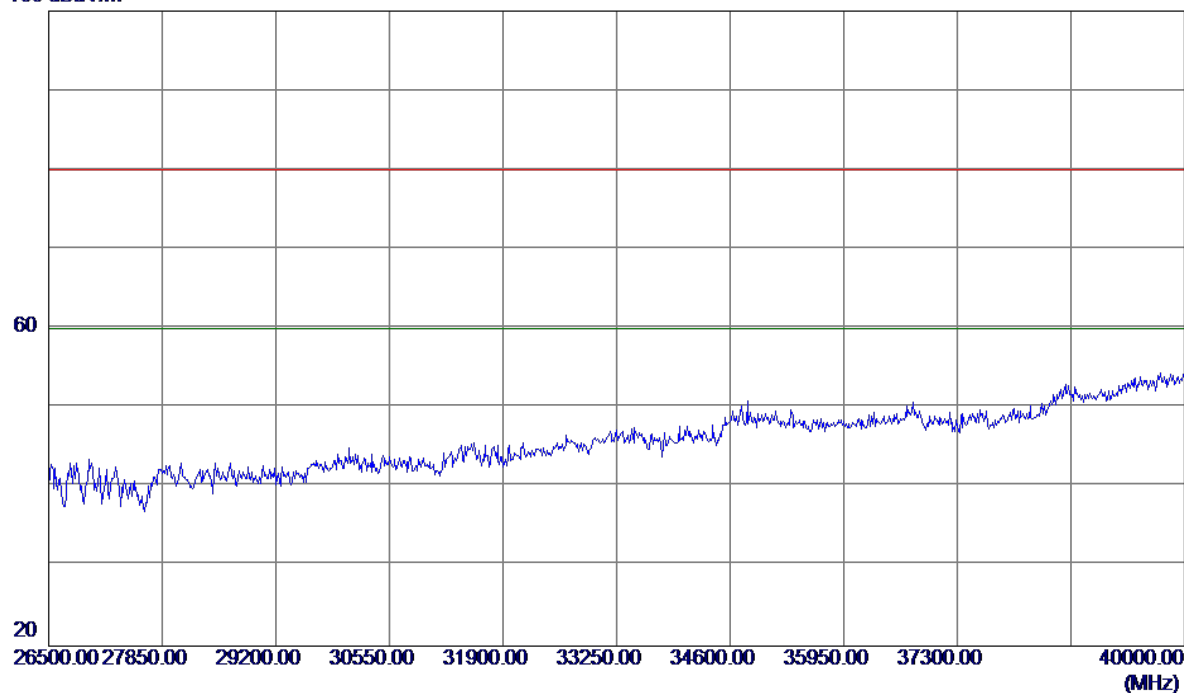

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment