



中国认可  
国际互认  
检测  
TESTING  
CNAS L0310



# FCC

# RF Test Report

**Product Name: HUAWEI MediaPad M3**

**Model Number: BTV-DL09**

**Report No: SYBH(Z-RF)023072016-2003**

**FCC ID: QISBTV-DL09**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**(Global Compliance and Testing Center of Huawei Technologies Co., Ltd)**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,  
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518



## Notice

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01 & 2174.02 & 2174.03.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1.
5. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named "Global Compliance and Testing Center of Huawei Technologies Co., Ltd", the both names have coexisted since 2009.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. The test report is only valid for the test samples.
9. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



**Applicant:** Huawei Technologies Co., Ltd.  
**Address:** Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District, Shenzhen, 518129, P.R.C

**Date of Receipt Sample:** 2016-07-22  
**Start Date of Test:** 2016-07-23  
**End Date of Test:** 2016-08-22

**Test Result:** Pass

<b>Approved by Senior Engineer:</b>	2016-08-22	Roger Zhang	<i>Roger Zhang</i>
	Date	Name	Signature

<b>Prepared by:</b>	2016-08-22	Hexiaolin	<i>Hexiaolin</i>
	Date	Name	Signature



## CONTENT

1	General Information.....	5
1.1	Applied Standard.....	5
1.2	Test Location .....	5
1.3	Test Environment Condition.....	5
2	Test Summary .....	6
2.1	Measurement Technical Requirements.....	6
3	Description of the Equipment under Test (EUT) .....	10
3.1	General Description .....	10
3.2	EUT Identity .....	10
3.3	Technical Description.....	11
4	General Test Conditions / Configurations.....	12
4.1	Test Modes .....	12
4.2	EUT Configurations.....	12
4.3	Test Environments .....	13
4.4	Test Setups.....	14
4.5	Test Conditions .....	17
5	Main Test Instruments .....	19
6	Appendixes.....	20



## 1 General Information

### 1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J 2014  
47 CFR FCC Part 15, Subpart C 2014  
47 CFR FCC Part 15, Subpart E 2014

Test Method: KDB 789033 D02 General UNII Test Procedures New Rules v01r03  
FCC KDB 558074 D01 DTS Meas Guidance v03r04  
ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices

### 1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.  
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.3 Test Environment Condition

Temperature: 15 to 30 °C (Ambient)  
Relative Humidity: 20 to 85 % (Ambient)  
Atmospheric Pressure: Not applicable

## 2 Test Summary

### 2.1 Measurement Technical Requirements

#### 2.1.1 U-NII (5150-5250, 5250-5350, 5470-5725 MHz, 5725-5850)

Test Item	Band	FCC Rule	Requirements	Test Result	Verdict
Emission Bandwidth	5150-5250	15.403(i) 15.407(a)(1)	No limit.	Appendix A	Pass
	5250-5350	15.403(i) 15.407(a)(2)			
	5470-5725	15.403(i) 15.407(a)(2)			
	5725-5850	15.403(i) 15.407(e)	≥ 500 kHz.		
Occupied Bandwidth	5150-5250	KDB 789033 § D	No limit.	Appendix B	Pass
	5250-5350				
	5470-5725				
	5725-5850				
Duty Cycle	5150-5850	--	No limit.	Appendix C	
Maximum Conducted Output Power	5150-5250	15.407(a)(1) 15.407(a)(4)	< 250mW (avg during transmission)	Appendix D	Pass
	5250-5350	15.407(a)(2) 15.407(a)(4)	<MIN{250mW, 11dB m+10*Ig(EBW)} (avg during transmission)		
	5470-5725	15.407(a)(2) 15.407(a)(4)	<MIN{250mW, 11dB m+10*Ig(EBW)} (avg during transmission)		
	5725-5850	15.407(a)(3)	< 1W (avg during transmission)		
Peak Power Spectral Density	5150-5250	15.407(a)(1) 15.407(a)(4)	<11dBm/MHz (avg during	Appendix E	

Test Item	Band	FCC Rule	Requirements	Test Result	Verdict
			transmission)		
	5250-5350	15.407(a)(2) 15.407(a)(4)	<11dBm/MHz (avg during transmission)		
	5470-5725	15.407(a)(2) 15.407(a)(4)	<11dBm/MHz (avg during transmission)		
	5725-5850	15.407(a)(3) 15.407(a)(4)	<30dBm/500KHz (avg during transmission)		
Unwanted Emissions	5150-5250	15.407(b)(1) 15.407(b)(6) 15.407(b)(7) 15.209	<ul style="list-style-type: none"> <li>● F&lt;1GHz: §15.209/§7.2.5 limit (QP).</li> <li>● F≥1GHz &amp; out-restricted: &lt;-27dBm/MHz PK e.i.r.p. (exl. 5.15-5.35 GHz).</li> <li>● F≥1GHz &amp; in-restricted: §15.209/§7.2.5 limit (AV&amp;PK).</li> </ul>	Appendix F	Pass
	5250-5350	15.407(b)(2) 15.407(b)(6) 15.407(b)(7) 15.209	<ul style="list-style-type: none"> <li>● F&lt;1GHz: §15.209/§7.2.5 limit (QP).</li> <li>● F≥1GHz &amp; out-restricted: &lt;-27dBm/MHz PK e.i.r.p. (exl. 5.25-5.35 GHz).</li> <li>● F≥1GHz &amp; in-restricted: §15.209/§7.2.5 limit (AV&amp;PK).</li> </ul>		

Test Item	Band	FCC Rule	Requirements	Test Result	Verdict
	5470-5750	15.407(b)(3) 15.407(b)(6) 15.407(b)(7) 15.209	<ul style="list-style-type: none"> <li>● F&lt;1GHz: §15.209/§7.2.5 limit (QP).</li> <li>● F≥1GHz &amp; out-restricted: &lt;-27dBm/MHz PK e.i.r.p. (exl. 5.47-5.725 GHz).</li> <li>● F≥1GHz &amp; in-restricted: §15.209/§7.2.5 limit (AV&amp;PK).</li> </ul>		
	5725-5850	15.407(b)(4) 15.407(b)(6) 15.407(b)(7) 15.209	<ul style="list-style-type: none"> <li>● F&lt;1GHz: §15.209/§7.2.5 limit (QP)</li> <li>● F≥1GHz &amp; out-restricted: &lt;-17dBm/MHz PK e.i.r.p.(from the edge to 10 MHz above or below the band edge); &lt;-27dBm/MHz PK e.i.r.p( for frequencies 10 MHz or greater above or below the band edge) (exl. 5725-5850 GHz).</li> <li>● F≥1GHz &amp; in-restricted: §15.209/§7.2.5 limit (AV&amp;PK).</li> </ul>		
Frequency Stability	5150-5250 5250-5350 5470-5725 5725-5850	15.407(g)	FCC Part 15.407(g)	Appendix G	Pass



---

---

Test Item	Band	FCC Rule	Requirements	Test Result	Verdict
AC Power Line Conducted Emissions	5150-5250 5250-5350 5470-5725 5725-5850	15.207	FCC Part 15.207 conducted limit;	Appendix H	Pass



### 3 Description of the Equipment under Test (EUT)

#### 3.1 General Description

The HUAWEI MediaPad M3 is a 8.4-inch tablet that boasts a proprietary HiSilicon octa-core processor and high-speed LTE, 3G, 2G and Wi-Fi network connectivity. The HUAWEI MediaPad M3 features a 2560 x 1600 pixel IPS display; 8 MP rear camera and HD video; 8 MP front camera; high-speed Internet connectivity; high definition voice calling; 1080p video hardware decoding; office productivity suite; and GPS.

.NOTE: Only 5G WIFI test data included in this report.

#### 3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

##### 3.2.1 Board

Board		
Description	Hardware Version	Software Version
Main Board	SH1BTVDL09M	BTV-DL09C001B102

##### 3.2.2 Sub-Assembly

Sub-Assembly			
Sub-Assembly Name	Model	Manufacturer	Description
Adapter	050200U01	Huawei Technologies Co., Ltd.	Input voltage: 100V~240V AC and 50/60 Hz,0.5A Output voltage: +5V $\overline{\text{---}}$ 2A
Battery	HB2899C0ECW	Huawei Technologies Co., Ltd.	Rated capacity: 4980 mAh Nominal Voltage: $\overline{\text{---}}$ +3.82V Charging Voltage: $\overline{\text{---}}$ +4.4V

### 3.3 Technical Description

Characteristics	Description	
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11n (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11n (40 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11ac (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11ac (40 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11ac (80 MHz channel bandwidth),	
TX/RX Operating Range	All	$f_c = 5000 \text{ MHz} + N * 5 \text{ MHz}$ , where: - $f_c$ = "Operating Frequency" in MHz, - $N$ = "Channel Number".
	5150-5250 MHz (U-NII)	$N = 36$ to $48$ with step of $4$ for the $20 \text{ MHz}$ channel bandwidth. $N = 38$ to $46$ with step of $4$ for the $40 \text{ MHz}$ channel bandwidth. $N = 42$ for the $80 \text{ MHz}$ channel bandwidth.
	5250-5350 MHz (U-NII)	$N = 52$ to $64$ with step of $4$ for the $20 \text{ MHz}$ channel bandwidth. $N = 54$ to $62$ with step of $4$ for the $40 \text{ MHz}$ channel bandwidth. $N = 58$ for the $80 \text{ MHz}$ channel bandwidth.
	5470-5600 MHz (U-NII)	$N = 100$ to $116$ with step of $4$ for the $20 \text{ MHz}$ channel bandwidth. $N = 102$ to $110$ with step of $4$ for the $40 \text{ MHz}$ channel bandwidth. $N = 106$ for the $80 \text{ MHz}$ channel bandwidth.
	5650-5725 MHz (U-NII)	$N = 132$ to $140$ with step of $4$ for the $20 \text{ MHz}$ channel bandwidth. $N = 134$ for the $40 \text{ MHz}$ channel bandwidth.
	5725-5850 MHz (U-NII)	$N = 145$ to $170$ with step of $4$ for the $20 \text{ MHz}$ channel bandwidth $N = 153$ to $162$ for the $40 \text{ MHz}$ channel bandwidth. $N = 155$ for the $80 \text{ MHz}$ channel bandwidth
Modulation Type	BPSK/QPSK/16QAM/64QAM (OFDM).	
Emission Designator	U-NII(5150-5250, 5250-5350, 5470-5725)	20M0G7D (for 802.11a mod), 20M6G7D (for 802.11n 20 MHz mode), 39M9G7D (for 802.11n 40 MHz mode), 20 M6G7D (for 802.11n20 MHz mode) 39 M7G7D (for 802.11AC40 MHz mode) 81M2G7D (for 802.11AC80 MHz mode)
	U-NII(5725-5850)	17M6G7D (for 802.11a mod), 17M6G7D (for 802.11n 20 MHz mode), 35M7G7D (for 802.11n 40 MHz mode) 17M6 G7D (for 802.11n20 MHz mode) 35M7G7D (for 802.11AC40 MHz mode) 75M3 G7D (for 802.11AC80 MHz mode)
TPC	<input checked="" type="checkbox"/> Supported, <input type="checkbox"/> Not Supported	
Antenna	Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated
	Ports	<input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3, <input type="checkbox"/> Ant 4
	Smart System	<input checked="" type="checkbox"/> SISO (for 802.11a/n/ac), <input type="checkbox"/> MIMO (for 802.11n/ac), <input type="checkbox"/> Diversity (for 802.11a) : Tx & Rx



Characteristics	Description			
	Gain	0.2 dBi (per antenna port, max.)		
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.		
Power Supply	Type	<input checked="" type="checkbox"/> AC/DC Adapter	<input type="checkbox"/> PoE:	<input type="checkbox"/> Other:

## 4 General Test Conditions / Configurations

### 4.1 Test Modes

NOTE: Worst cases for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11A	IEEE 802.11a with data rate of 6 Mbps using SISO mode.
11N20	IEEE 802.11n with data rate of MCS0 and bandwidth of 20 MHz using SISO mode.
11N40	IEEE 802.11n with data rate of MCS0 and bandwidth of 40 MHz using SISO mode.
11AC20	IEEE 802.11n with data rate of MCSAC0 and bandwidth of 20 MHz using SISO mode.
11AC40	IEEE 802.11n with data rate of MCSAC0 and bandwidth of 40 MHz using SISO mode.
11AC80	IEEE 802.11n with data rate of MCSAC0 and bandwidth of 80 MHz using SISO mode.

### 4.2 EUT Configurations

#### 4.2.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, <ul style="list-style-type: none"><li>● All TX tests are performed at all TX antenna ports of the EUT, and</li><li>● All RX tests are performed at all RX antenna ports of the EUT.</li></ul>
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.



## 4.2.2 Customized Configurations

### 4.2.2.1 U-NII

Test Mode	Antenna Port	Power Conf.,	Duty cycle [%]
11A	Ant 1	6	97.97
11N20	Ant 1	6	97.96
11N40	Ant 1	6	95.33
11AC20	Ant 1	6	97.62
11AC40	Ant 1	6	95.81
11AC80	Ant 1	6	96.62

## 4.3 Test Environments


Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VN	3.82V

NOTE: VN= nominal voltage

## 4.4 Test Setups

### 4.4.1 Test Setup 1


The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

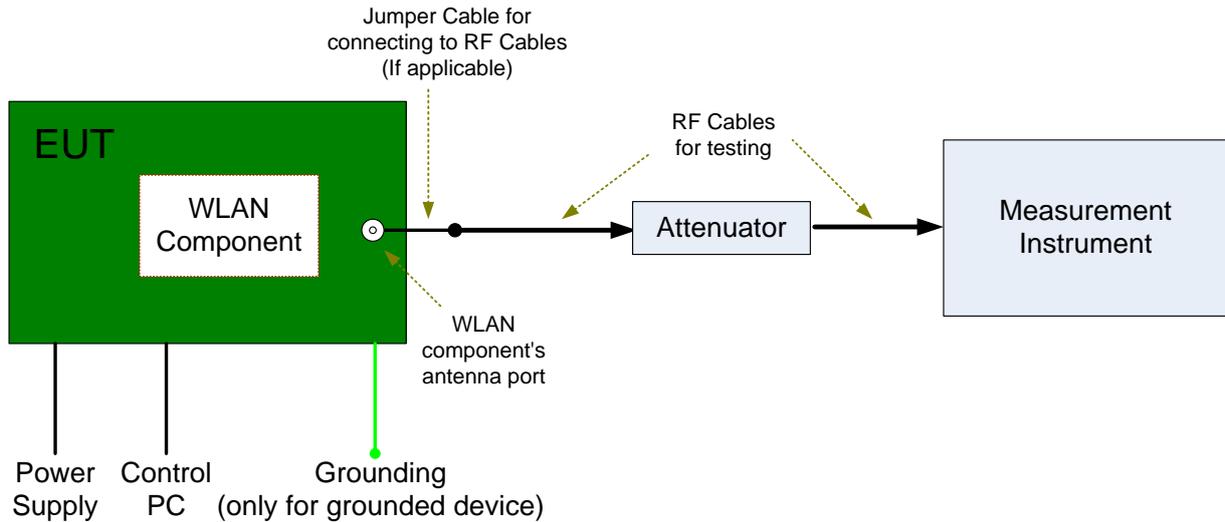


### 4.4.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3 m (for 30 MHz to 26.5 GHz) or 1 m (for 26.5 GHz to 40 GHz). The setup is according to ANSI C63.10, ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

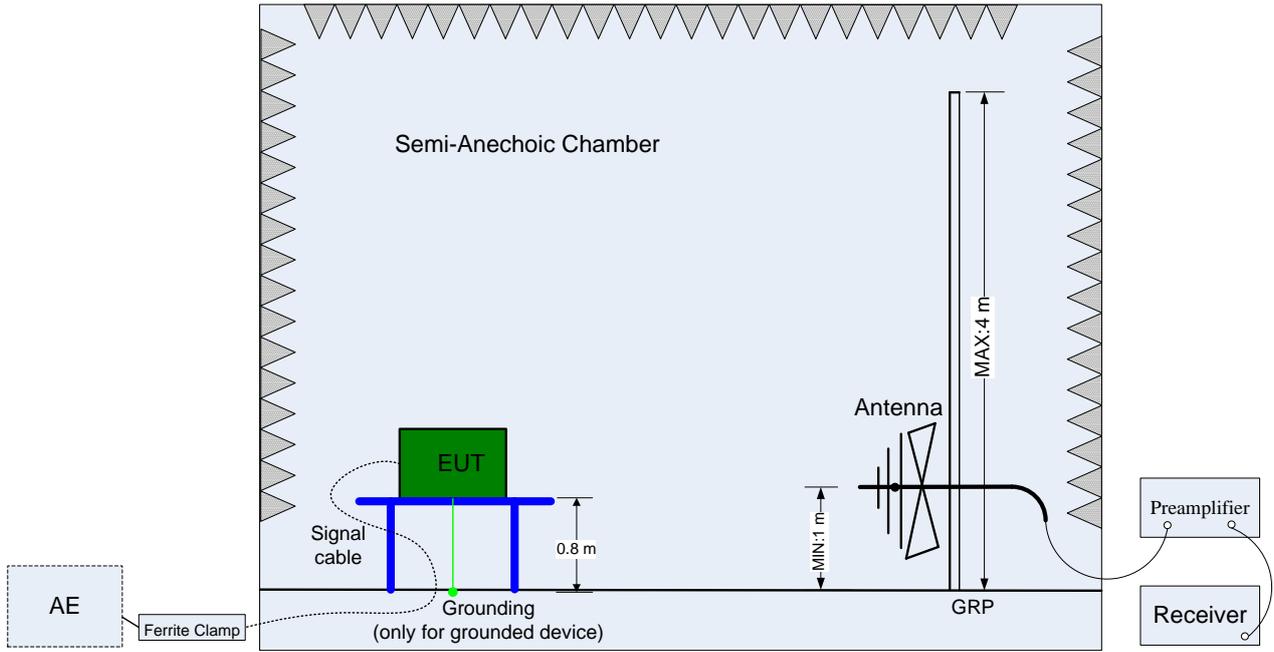

(Below 1 GHz)

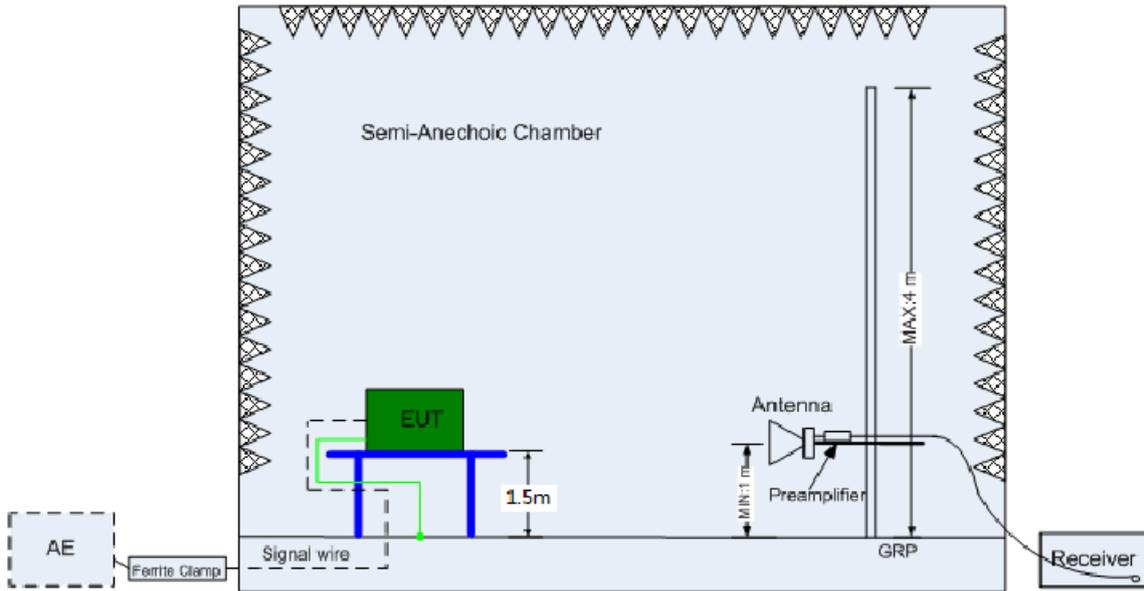


(Above 1 GHz)

### 4.4.3 Test Setup 3

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

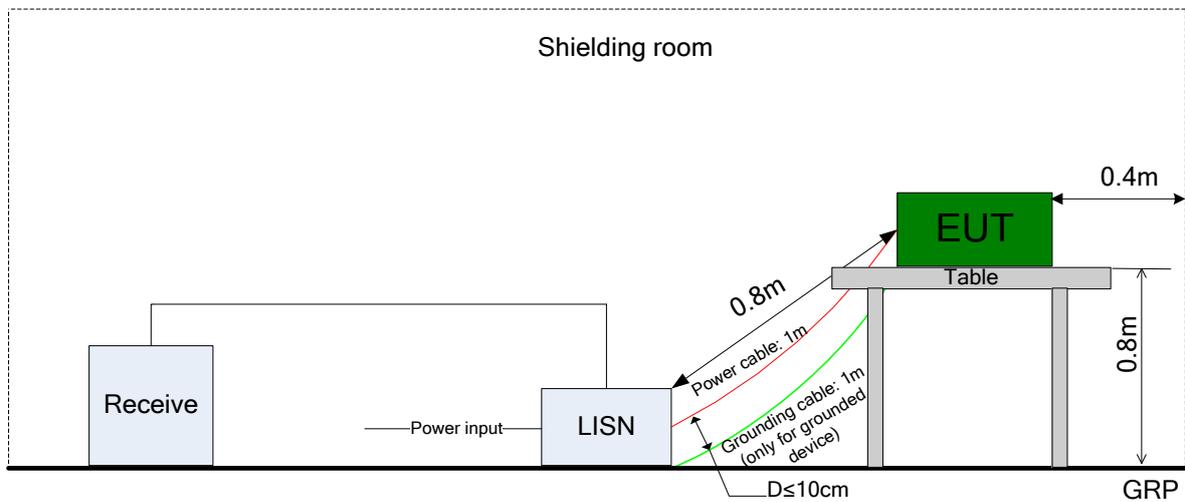



## 4.5 Test Conditions

### 4.5.1 U-NII

Test Case	Test Conditions		
	Configuration	Description	
Emission Bandwidth (EBW)	Meas. Method	FCC KDB 789033 §C).	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	All EUT conf. with Tx modes.	
Maximum Conducted Output Power	Meas. Method	FCC KDB 789033 §E)d)	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	All EUT conf. with Tx modes.	
Peak Power Spectral Density	Meas. Method	FCC KDB 789033 §F).	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	All EUT conf. with Tx modes.	
Unwanted Emissions (Cond.)	Meas. Method	FCC KDB 789033 §G), Conducted (antenna-port). NOTE: Antenna-port conducted measurements (Cond.) are acceptable as an alternative to radiated measurements (Rad.) for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test (Radt-a) for cabinet/case emissions will also be required.	
	Test Env.	NTNV	
	Test Setup	Test Setup 1	
	EUT Conf.	5150-5250	All EUT Test Mode 20 MHz bandwidth: Ch.36, Ch.48 40 MHz bandwidth: Ch.38, Ch.46 80 MHz bandwidth: Ch.42
		5250-5350	All EUT Test Mode 20 MHz bandwidth: Ch.52, Ch.64 40 MHz bandwidth: Ch.54, Ch.62 80 MHz bandwidth: Ch.54
		5470-5725	All EUT Test Mode 20 MHz bandwidth: Ch.100, Ch.140 40 MHz bandwidth: Ch.102, Ch.134 80 MHz bandwidth: Ch.106,
		5725-5850	All EUT Test Mode 20 MHz bandwidth: Ch.149, Ch.165 40 MHz bandwidth: Ch.151, Ch.159



Test Case	Test Conditions	
	Configuration	Description
		80 MHz bandwidth: Ch.155
Frequency Stability	Meas. Method	15.407(g) Frequency Stability
	Test Env.	(1)VL, VN and VH of Rated Voltage at Ambient Climate. (2) -5 °C,5°C,15°C,-25°C,35°C,45°C,50°C
	Test Setup	Test Setup 1
	EUT Conf.	Ch.36,Ch.165
AC Power Line Conducted Emissions	Meas. Method	AC mains conducted. Pre: RBW = 10 kHz; Det. = Peak. Final: RBW = 9 kHz; Det. = CISPR Quasi-Peak & Average.
	Test Env.	NTNV
	Test Setup	Test Setup 3
	EUT Conf.	(Worst Conf.)



## 5 Main Test Instruments

NOTE: Unless otherwise specified, the calibration intervals for test instruments were Annual (per year). The other intervals, if applicable, are marked with (##y), which denotes ## years calibration interval.

Main Test Equipments					
Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal- Due
Power supply	KEITHLEY	2303	1342889	2015/9/16	2017/9/15
Wireless Communication Test set	Agilent	N4010A	MY49081592	2016/8/5	2017/8/5
Universal Radio Communication Tester	R&S	CMU200	123299	2015/10/30	2016/10/29
Spectrum Analyzer	Agilent	N9020A	MY52090652	2016/6/29	2017/6/29
Universal Radio Communication Tester	R & S	CMW500	126854	2016/1/8	2017/1/7
Signal Analyzer	R&S	FSQ31	200021	2016/8/5	2017/8/5
Spectrum Analyzer	Agilent	N9030A	MY49431698	2016/8/5	2017/8/5
Temperature Chamber	WEISS	WKL64	5.6246E+13	2016/1/21	2017/1/20
Signal generator	Agilent	E8257D	MY49281095	2016/8/5	2017/8/5
Vector Signal Generator	R&S	SMU200A	104162	2016/8/5	2017/8/5
Test receiver	R&S	ESU26	100387	2016/6/21	2017/6/21
Test receiver	R&S	ESCI	101163	2015/11/11	2016/11/10
Spectrum analyzer	R&S	FSU3	200474	2016/5/24	2017/5/24
Spectrum analyzer	R&S	FSU43	100144	2016/6/2	2017/6/2
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100262	2015/4/30	2017/4/29
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100263	2015/4/30	2017/4/29
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-490	2015/4/30	2017/4/29
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-520	2015/4/30	2017/4/29
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2015/4/30	2017/4/29
double ridged horn antenna (0.8G-18GHz)	R&S	HF907	100305	2015/4/30	2017/4/29
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	Sep-60	5140299	2015/7/15	2017/7/14
Artificial Main Network	R&S	ENV4200	100134	2016/6/2	2017/6/2
Line Impedance	R&S	ENV216	100382	2016/6/2	2017/6/2



Stabilization Network					
Signal Generator	Agilent	E4438C	MY49071538	2016/3/1	2017/3/1
Power Detecting & Sampling Unit	R&S	OSP-B157	100914	2016/8/5	2017/8/5
Software Information					
Test Item	Software Name		Manufacturer	Version	
RE	EMC32		R&S	V9.25.0	
CE	EMC32		R&S	V9.25.0	

## 6 Appendixes

Appendix No.	Description
SYBH(Z-RF)023072016-2003-A	Appendix for 5G

END