


FCC Test Report


FCC ID: QISBTV-DL09

Project No. : 1607C225
Equipment : HUAWEI MediaPad M3
Model Name : BTV-DL09
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Jul. 21, 2016
Date of Test : Jul. 21, 2016 ~ Aug. 01, 2016
Issued Date : Aug. 03, 2016
Tested by : BTL Inc.

Testing Engineer : 
(Bill Zhang)

Technical Manager : 
(James Chiu)

Authorized Signatory : 
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	4
1 . CERIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 MEASUREMENT INSTRUMENTS LIST	12
4.1.3 TEST PROCEDURE	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	13
4.1.6 EUT OPERATING CONDITIONS	13
4.1.7 TEST RESULTS	14
4.2 RADIATED EMISSION MEASUREMENT	39
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	39
4.2.2 MEASUREMENT INSTRUMENTS LIST	40
4.2.3 TEST PROCEDURE	41
4.2.4 DEVIATION FROM TEST STANDARD	41
4.2.5 TEST SETUP	42
4.2.6 EUT OPERATING CONDITIONS	43
4.2.7 TEST RESULTS-BELOW 1GHZ	43
4.2.8 TEST RESULTS-ABOVE 1GHZ	68

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1607C225	Original Issue.	Aug. 03, 2016

1. CERIFICATION

Equipment : HUAWEI MediaPad M3
Brand Name : HUAWEI
Model Name : BTV-DL09
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District Shenzhen China
Date of Test : Jul. 21, 2016 ~ Aug. 01, 2016
Test Sample : Engineering Sample
Standard(s) : FCC Part 15, Subpart B
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1607C225) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	NOTE (2)

NOTE:

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency exceeds 108 MHz, so the test will be performed.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95%**.

A. A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad M3
Brand Name	HUAWEI
Model Name	BTV-DL09
Model Difference	NA
Frequency	GSM 850/1900 WCDMA B2/5 LTE B5/7/38/41 BT 4.1 Wi-Fi: 802.11a/b/g/n/ac
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) DONGGUAN PHITEK ELECTRONICS CO.,LTD Model: HW-050200U01 #2 Supplied from battery.
Power Rating	#1 I/P: ~100-240V 50/60Hz 0.5A O/P: 5V \equiv 2A 10W #2 DC 3.82V
HW Version	SH1BTVDL09M
SW Version	BTV-DL09C001B102

Note:

- For a more detailed features description, please refer to the manufacturer’s specifications or the user's manual.
-

Item	Mfr/Brand	Model.
Battery	Sunwoda Electronic Co., LTD	HB2899C0ECW
	SCUD (FUJIAN) Electronics Co., Ltd	
	Harbin Coslight Power Co., Ltd.	
USB Cable	Luxshare Precision Industry Co., Ltd	L99U2018-CS-H
	SHEN ZHEN PANG NGAI INDUSTRIAL	H09-000543
	FOXCONN INTERCONNECT	CUBB01M-HC306-DH
Earphone	Harman Embedded Audio, LLC	E050-0021-001

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	USB COPY(EUT with PC)+IDLE
Mode 2	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on
Mode 3	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on
Mode 4	Adapter+Playing+Speaker
Mode 5	Adapter+Playing+Earphone
Mode 6	Adapter+Traffic(GSM)
Mode 7	Adapter+Traffic(WCDMA)
Mode 8	Adapter+Traffic(LTE)

For Conducted Test	
Final Test Mode	Description
Mode 1	USB COPY(EUT with PC)+IDLE
Mode 2	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on
Mode 3	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on
Mode 4	Adapter+Playing+Speaker
Mode 5	Adapter+Playing+Earphone
Mode 6	Adapter+Traffic(GSM)
Mode 7	Adapter+Traffic(WCDMA)
Mode 8	Adapter+Traffic(LTE)

For Radiated Test	
Final Test Mode	Description
Mode 1	USB COPY(EUT with PC)+IDLE
Mode 2	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on
Mode 3	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on
Mode 4	Adapter+Playing+Speaker
Mode 5	Adapter+Playing+Earphone
Mode 6	Adapter+Traffic(GSM)
Mode 7	Adapter+Traffic(WCDMA)
Mode 8	Adapter+Traffic(LTE)

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Mode 1

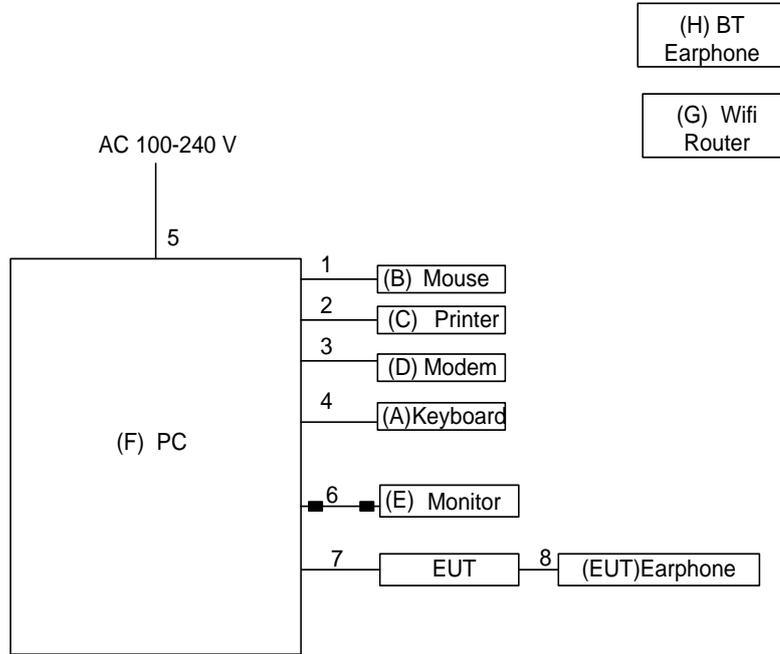

■ Ferrite core

Ground plane
 Remote System

Mode 2~8

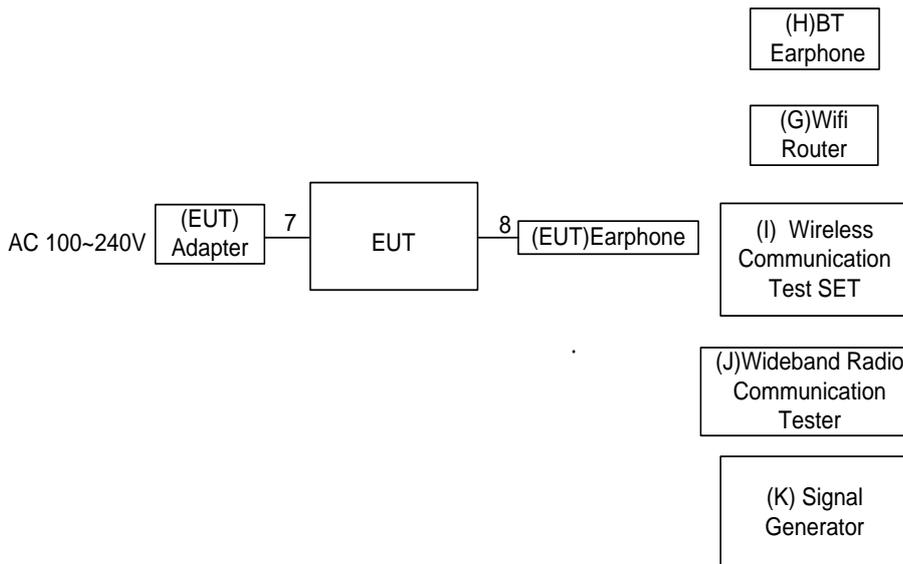

Ground plane
 Remote System

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071T08
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6AG-
F	PC	Dell	745	DOC	G7K832X
G	wireless router	ASUS	RT-AC66U	MSQ-RTAC66U	E8ICGG000138
H	BT earphone	N/A	N/A	N/A	N/A
I	Wireless Communication Test SET	Agilent	8960 Series	N/A	N/A
J	Wideband Radio Communication Tester	RS	CMW500	N/A	122125
K	Signal Generator	Agilent	E4438C	N/A	MY49071316

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Audio Cable

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	0052765	Mar. 27, 2017
2	LISN	R&S	ENV216	101447	Mar. 27, 2017
3	Test Cable	emci	RG223(9KHz-30MHz)	C_17	Mar. 10, 2017
4	EMI Test Receiver	R&S	ESCI	100382	Mar. 27, 2017
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 27, 2017
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.


4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- f. First the whole spectrum of emission caused by equipment under test(EUT) is recorded with Detector set to peak. Peak value recorded in table if the margin from QP Limit is larger than 2dB, otherwise, QP value is recorded, Measuring frequency range from 150KHz to 30MHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

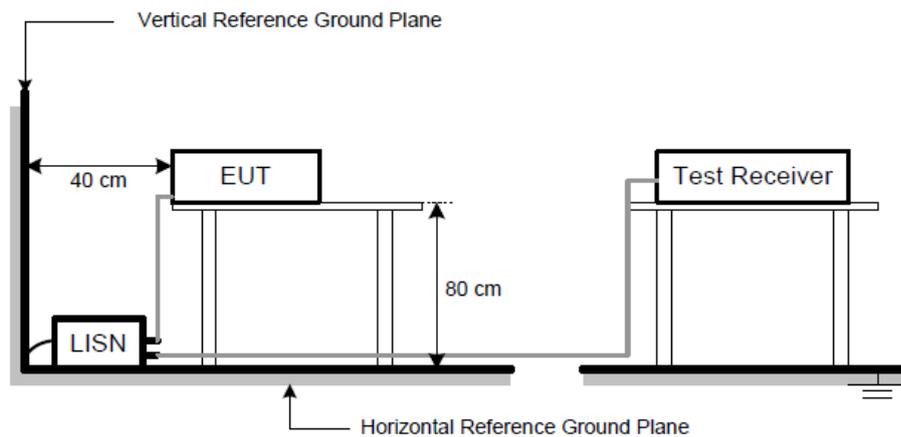

4.1.6 EUT OPERATING CONDITIONS


The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

4.1.7 TEST RESULTS

Remark


- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.3 sec./MHz.
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.3 sec./MHz.
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ * ” marked in AVG Mode column of Interference Voltage Measured.

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

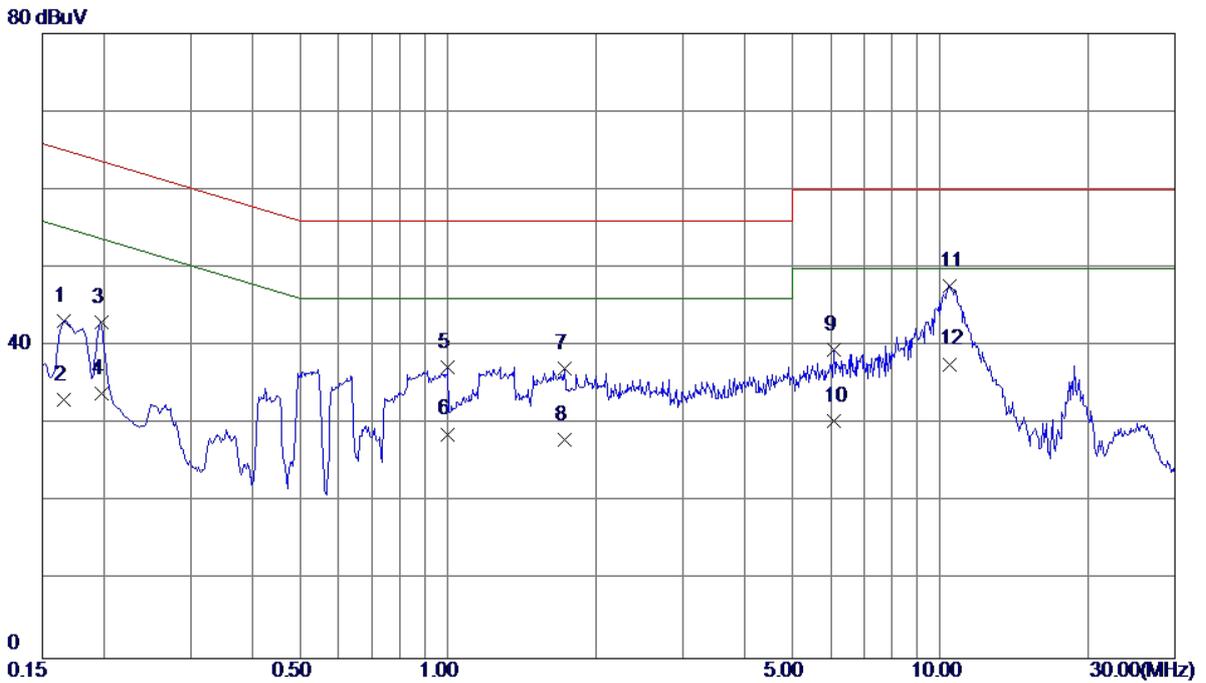


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1658	33.60	9.65	43.25	65.17	-21.92	QP
2	0.1658	23.50	9.65	33.15	55.17	-22.02	AVG
3	0.1973	33.36	9.67	43.03	63.72	-20.69	QP
4	0.1973	24.30	9.67	33.97	53.72	-19.75	AVG
5	1.0005	27.16	10.12	37.28	56.00	-18.72	QP
6	1.0005	18.60	10.12	28.72	46.00	-17.28	AVG
7	1.7295	27.07	10.11	37.18	56.00	-18.82	QP
8	1.7295	17.90	10.11	28.01	46.00	-17.99	AVG
9	6.0968	29.39	10.15	39.54	60.00	-20.46	QP
10	6.0968	20.30	10.15	30.45	50.00	-19.55	AVG
11 *	10.4888	37.26	10.48	47.74	60.00	-12.26	QP
12	10.4888	27.20	10.48	37.68	50.00	-12.32	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

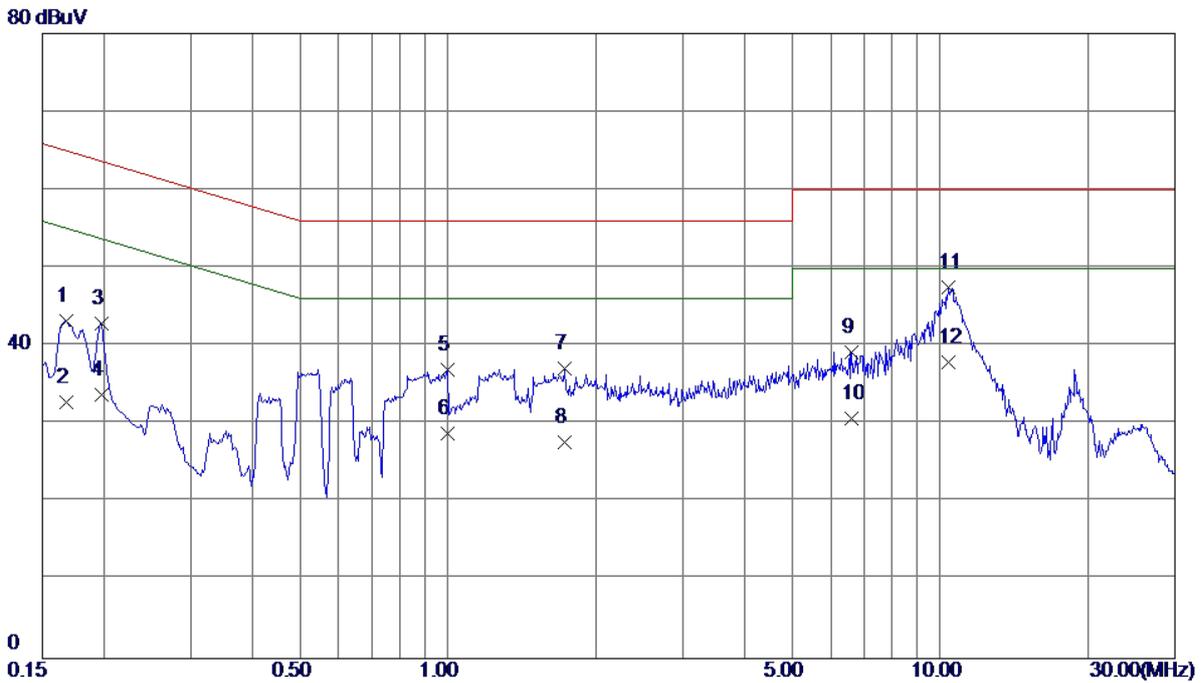


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1680	33.59	9.55	43.14	65.06	-21.92	QP
2	0.1680	23.30	9.55	32.85	55.06	-22.21	AVG
3	0.1973	33.21	9.66	42.87	63.72	-20.85	QP
4	0.1973	24.10	9.66	33.76	53.72	-19.96	AVG
5	1.0005	27.10	9.92	37.02	56.00	-18.98	QP
6	1.0005	18.90	9.92	28.82	46.00	-17.18	AVG
7	1.7295	27.10	10.06	37.16	56.00	-18.84	QP
8	1.7295	17.60	10.06	27.66	46.00	-18.34	AVG
9	6.6188	28.98	10.29	39.27	60.00	-20.73	QP
10	6.6188	20.40	10.29	30.69	50.00	-19.31	AVG
11	10.4235	37.26	10.29	47.55	60.00	-12.45	QP
12 *	10.4235	27.70	10.29	37.99	50.00	-12.01	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

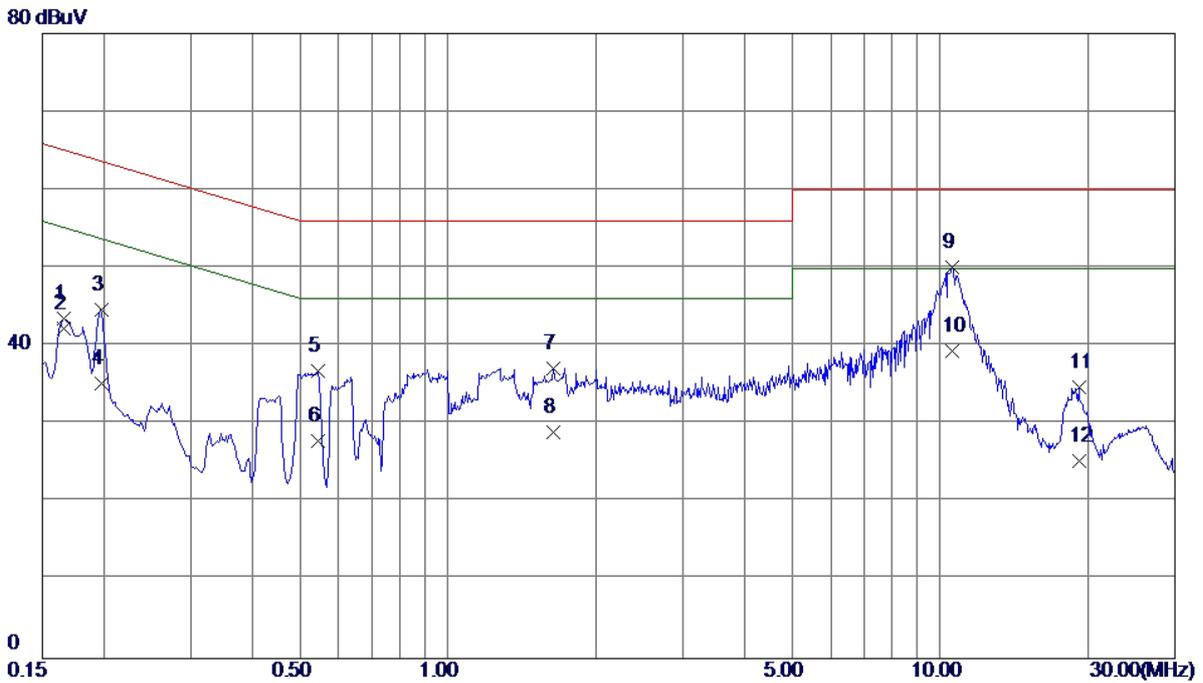


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1658	33.85	9.65	43.50	65.17	-21.67	QP
2	0.1658	32.60	9.65	42.25	55.17	-12.92	AVG
3	0.1973	34.90	9.67	44.57	63.72	-19.15	QP
4	0.1973	25.60	9.67	35.27	53.72	-18.45	AVG
5	0.5460	26.79	9.97	36.76	56.00	-19.24	QP
6	0.5460	17.90	9.97	27.87	46.00	-18.13	AVG
7	1.6372	26.98	10.12	37.10	56.00	-18.90	QP
8	1.6372	18.90	10.12	29.02	46.00	-16.98	AVG
9 *	10.6080	39.59	10.49	50.08	60.00	-9.92	QP
10	10.6080	28.89	10.49	39.38	50.00	-10.62	AVG
11	19.2030	23.98	10.68	34.66	60.00	-25.34	QP
12	19.2030	14.60	10.68	25.28	50.00	-24.72	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

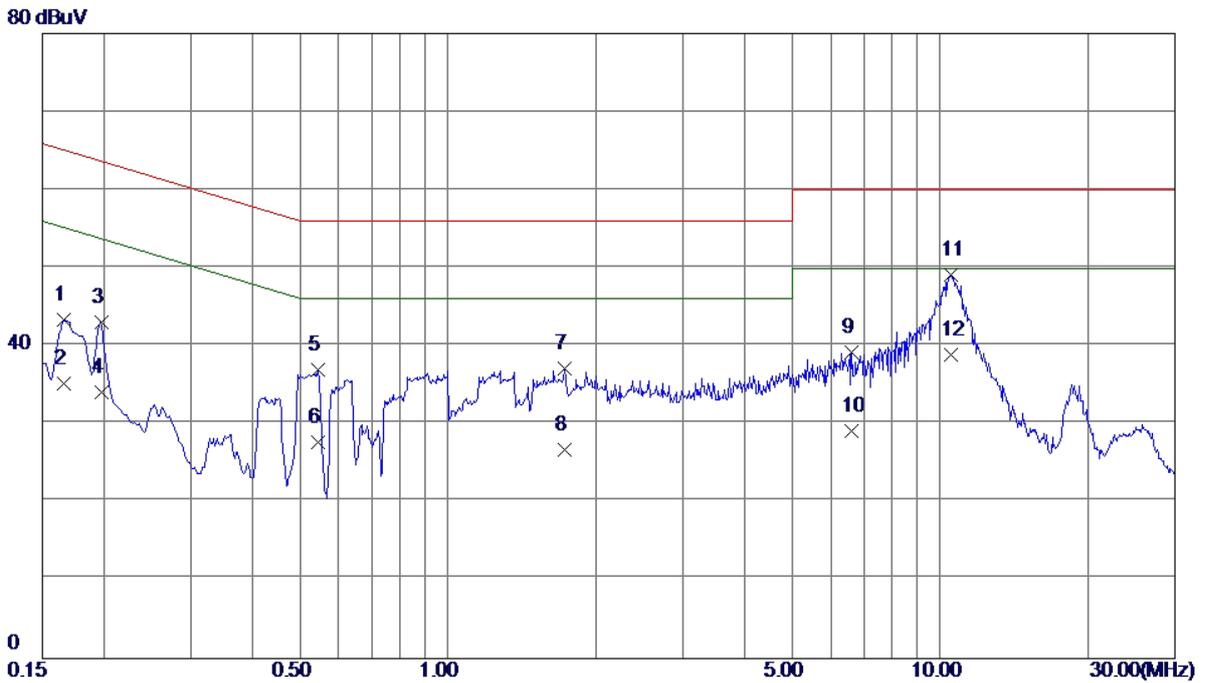


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1658	33.80	9.55	43.35	65.17	-21.82	QP
2	0.1658	25.60	9.55	35.15	55.17	-20.02	AVG
3	0.1973	33.40	9.66	43.06	63.72	-20.66	QP
4	0.1973	24.40	9.66	34.06	53.72	-19.66	AVG
5	0.5460	27.11	9.82	36.93	56.00	-19.07	QP
6	0.5460	17.80	9.82	27.62	46.00	-18.38	AVG
7	1.7295	27.00	10.06	37.06	56.00	-18.94	QP
8	1.7295	16.60	10.06	26.66	46.00	-19.34	AVG
9	6.6165	28.94	10.29	39.23	60.00	-20.77	QP
10	6.6165	18.90	10.29	29.19	50.00	-20.81	AVG
11 *	10.5428	38.82	10.29	49.11	60.00	-10.89	QP
12	10.5428	28.60	10.29	38.89	50.00	-11.11	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

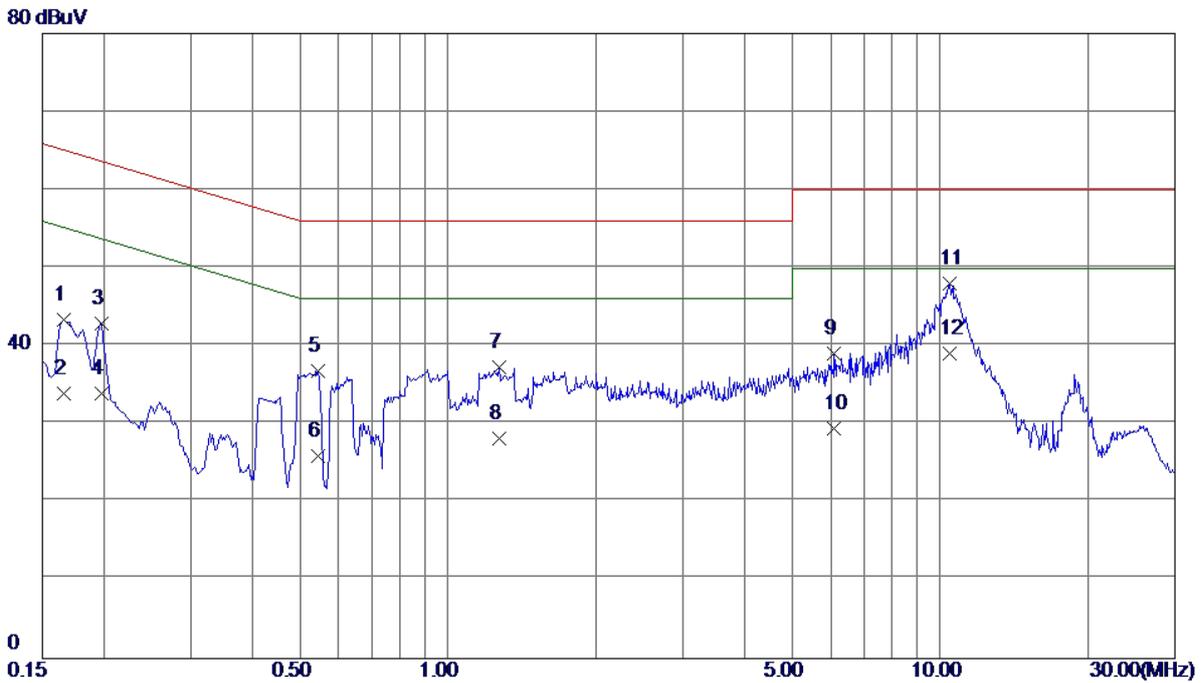


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1658	33.71	9.65	43.36	65.17	-21.81	QP
2	0.1658	24.20	9.65	33.85	55.17	-21.32	AVG
3	0.1973	33.22	9.67	42.89	63.72	-20.83	QP
4	0.1973	24.30	9.67	33.97	53.72	-19.75	AVG
5	0.5460	26.82	9.97	36.79	56.00	-19.21	QP
6	0.5460	15.90	9.97	25.87	46.00	-20.13	AVG
7	1.2727	27.10	10.21	37.31	56.00	-18.69	QP
8	1.2727	17.90	10.21	28.11	46.00	-17.89	AVG
9	6.0968	28.89	10.15	39.04	60.00	-20.96	QP
10	6.0968	19.30	10.15	29.45	50.00	-20.55	AVG
11	10.4819	37.50	10.48	47.98	60.00	-12.02	QP
12 *	10.4819	28.60	10.48	39.08	50.00	-10.92	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

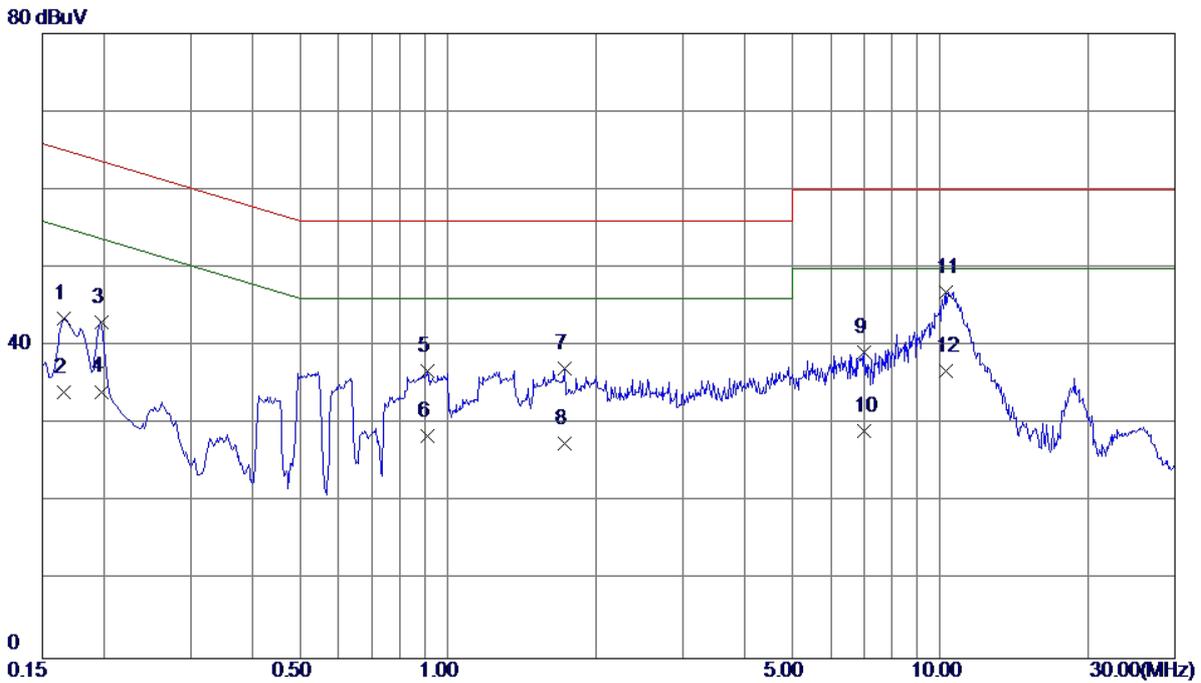


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1658	34.02	9.55	43.57	65.17	-21.60	QP
2	0.1658	24.60	9.55	34.15	55.17	-21.02	AVG
3	0.1973	33.37	9.66	43.03	63.72	-20.69	QP
4	0.1973	24.50	9.66	34.16	53.72	-19.56	AVG
5	0.9105	26.94	9.90	36.84	56.00	-19.16	QP
6	0.9105	18.60	9.90	28.50	46.00	-17.50	AVG
7	1.7295	27.05	10.06	37.11	56.00	-18.89	QP
8	1.7295	17.50	10.06	27.56	46.00	-18.44	AVG
9	7.0080	28.85	10.28	39.13	60.00	-20.87	QP
10	7.0080	18.90	10.28	29.18	50.00	-20.82	AVG
11 *	10.2840	36.64	10.28	46.92	60.00	-13.08	QP
12	10.2840	26.50	10.28	36.78	50.00	-13.22	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:Luxshare +Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

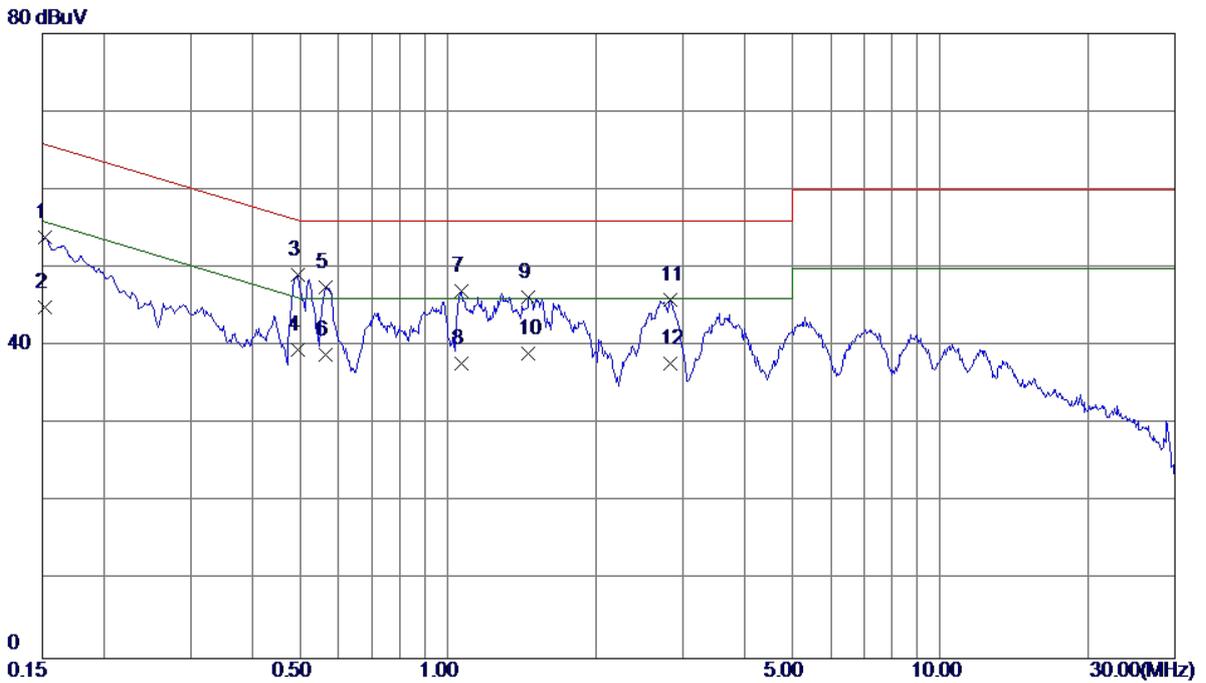


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1522	44.21	9.64	53.85	65.88	-12.03	QP
2	0.1522	35.30	9.64	44.94	55.88	-10.94	AVG
3	0.4965	39.16	9.91	49.07	56.06	-6.99	QP
4 *	0.4965	29.60	9.91	39.51	46.06	-6.55	AVG
5	0.5639	37.58	9.99	47.57	56.00	-8.43	QP
6	0.5639	28.89	9.99	38.88	46.00	-7.12	AVG
7	1.0635	36.87	10.15	47.02	56.00	-8.98	QP
8	1.0635	27.60	10.15	37.75	46.00	-8.25	AVG
9	1.4595	36.14	10.16	46.30	56.00	-9.70	QP
10	1.4595	28.89	10.16	39.05	46.00	-6.95	AVG
11	2.8343	35.90	10.04	45.94	56.00	-10.06	QP
12	2.8343	27.70	10.04	37.74	46.00	-8.26	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:Luxshare +Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

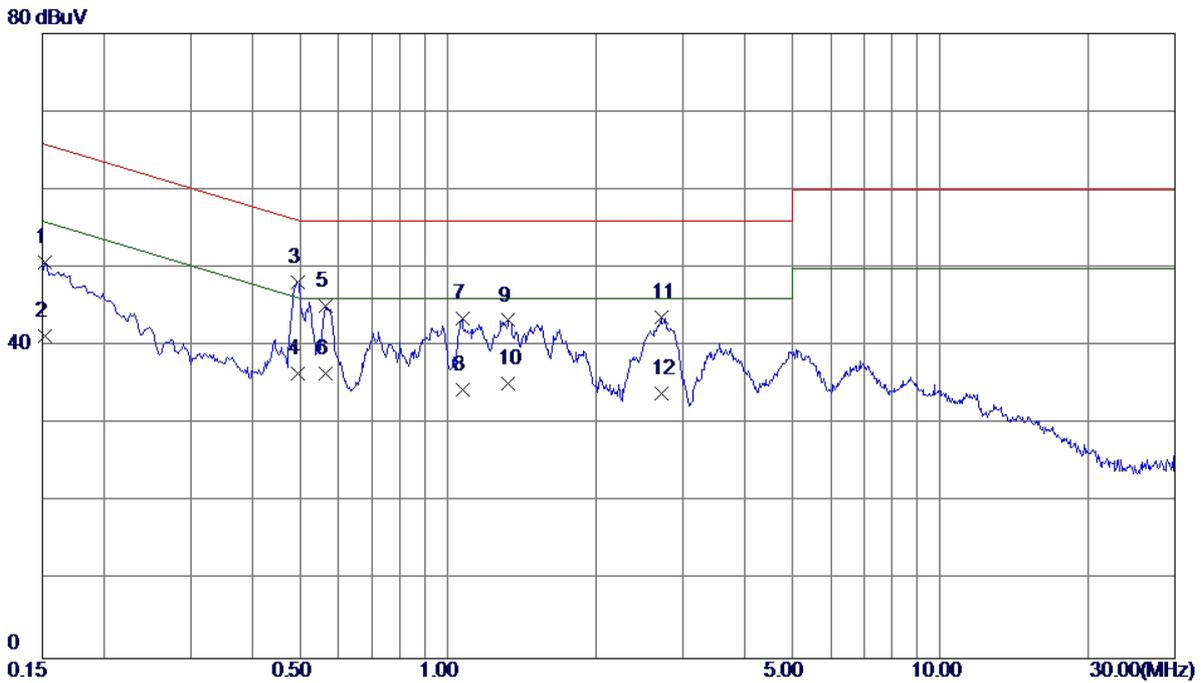


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1522	41.19	9.54	50.73	65.88	-15.15	QP
2	0.1522	31.80	9.54	41.34	55.88	-14.54	AVG
3 *	0.4942	38.42	9.81	48.23	56.10	-7.87	QP
4	0.4942	26.60	9.81	36.41	46.10	-9.69	AVG
5	0.5639	35.32	9.82	45.14	56.00	-10.86	QP
6	0.5639	26.60	9.82	36.42	46.00	-9.58	AVG
7	1.0702	33.59	9.92	43.51	56.00	-12.49	QP
8	1.0702	24.50	9.92	34.42	46.00	-11.58	AVG
9	1.3268	33.30	9.98	43.28	56.00	-12.72	QP
10	1.3268	25.20	9.98	35.18	46.00	-10.82	AVG
11	2.7105	33.58	10.06	43.64	56.00	-12.36	QP
12	2.7105	23.90	10.06	33.96	46.00	-12.04	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:Luxshare+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

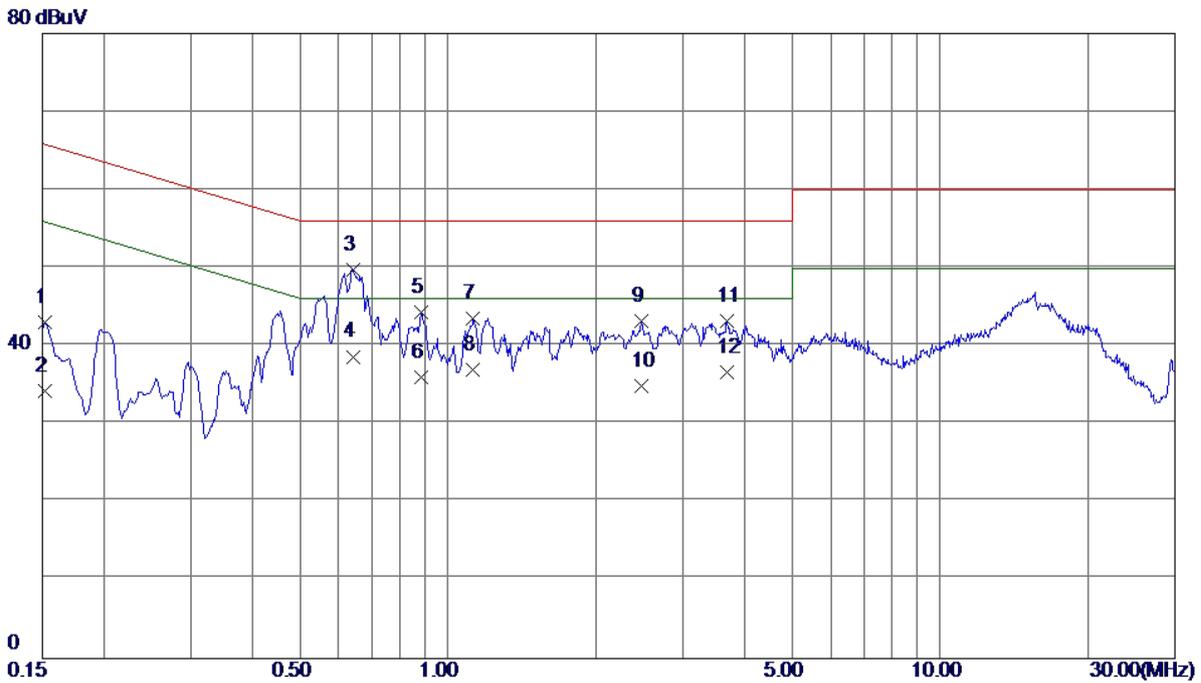


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1522	33.33	9.64	42.97	65.88	-22.91	QP
2	0.1522	24.60	9.64	34.24	55.88	-21.64	AVG
3 *	0.6405	39.65	10.04	49.69	56.00	-6.31	QP
4	0.6405	28.60	10.04	38.64	46.00	-7.36	AVG
5	0.8835	34.28	10.10	44.38	56.00	-11.62	QP
6	0.8835	25.90	10.10	36.00	46.00	-10.00	AVG
7	1.1265	33.40	10.19	43.59	56.00	-12.41	QP
8	1.1265	26.80	10.19	36.99	46.00	-9.01	AVG
9	2.4787	33.05	10.09	43.14	56.00	-12.86	QP
10	2.4787	24.80	10.09	34.89	46.00	-11.11	AVG
11	3.6870	33.10	10.05	43.15	56.00	-12.85	QP
12	3.6870	26.60	10.05	36.65	46.00	-9.35	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:Luxshare+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

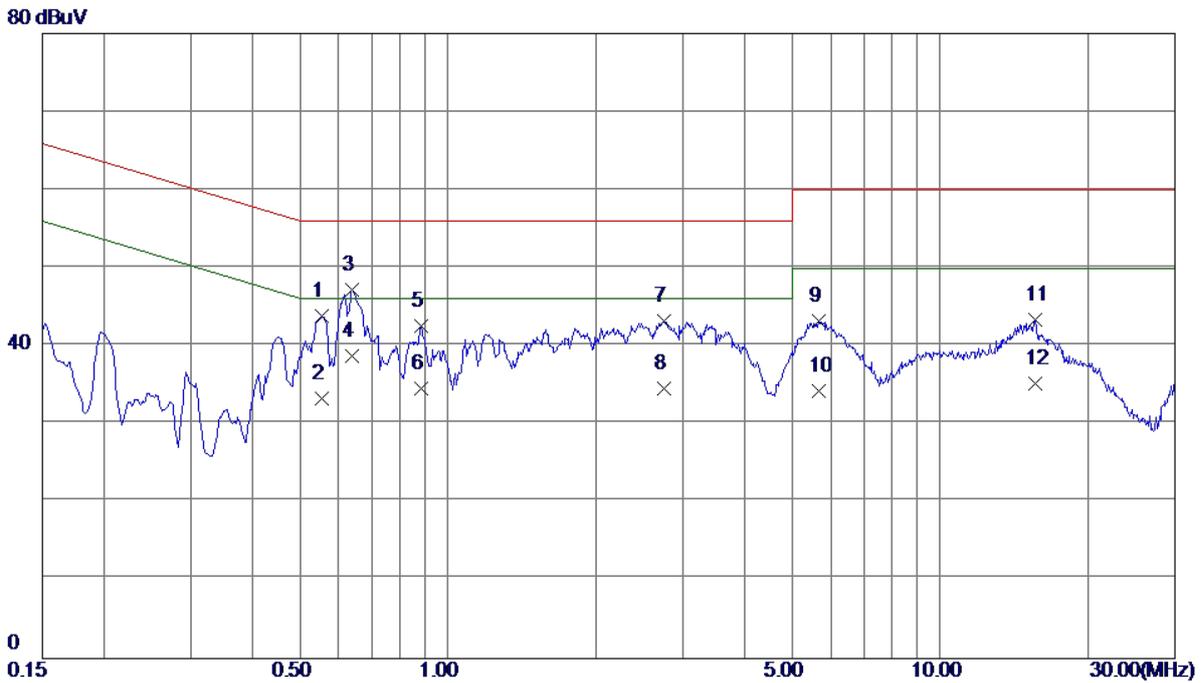


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5550	34.01	9.82	43.83	56.00	-12.17	QP
2	0.5550	23.50	9.82	33.32	46.00	-12.68	AVG
3	0.6382	37.33	9.84	47.17	56.00	-8.83	QP
4 *	0.6382	28.90	9.84	38.74	46.00	-7.26	AVG
5	0.8812	32.64	9.90	42.54	56.00	-13.46	QP
6	0.8812	24.60	9.90	34.50	46.00	-11.50	AVG
7	2.7488	33.20	10.06	43.26	56.00	-12.74	QP
8	2.7488	24.49	10.06	34.55	46.00	-11.45	AVG
9	5.6760	32.84	10.30	43.14	60.00	-16.86	QP
10	5.6760	23.90	10.30	34.20	50.00	-15.80	AVG
11	15.6368	32.72	10.59	43.31	60.00	-16.69	QP
12	15.6368	24.60	10.59	35.19	50.00	-14.81	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

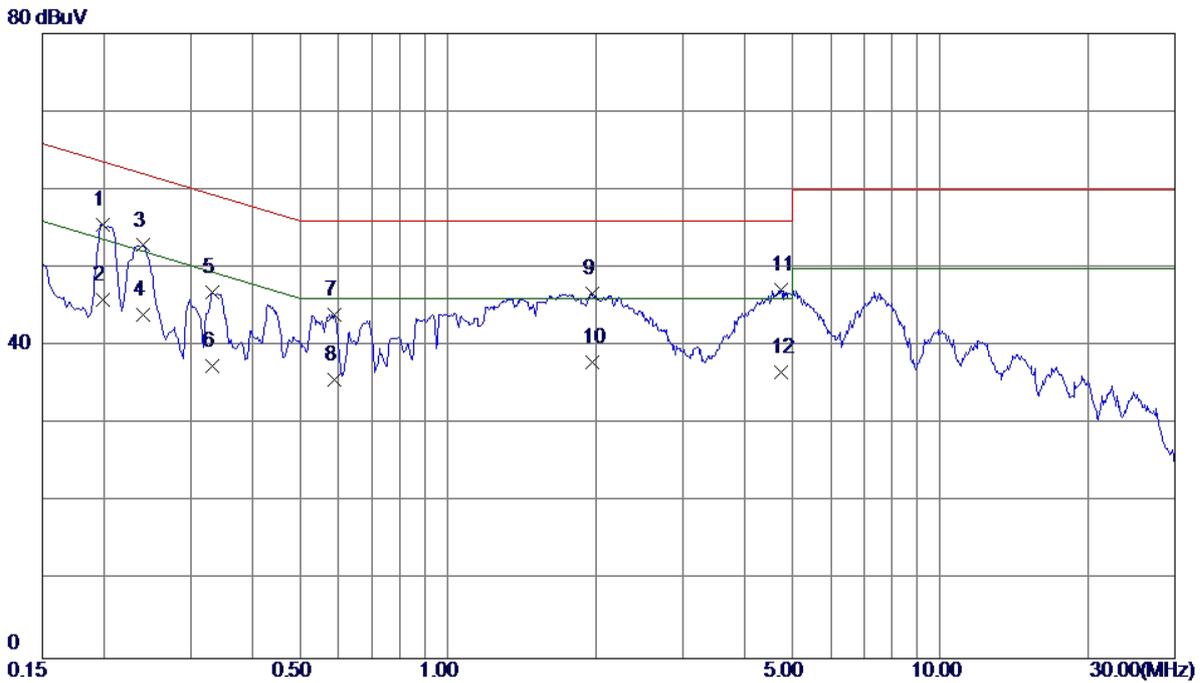


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1995	45.87	9.67	55.54	63.63	-8.09	QP
2 *	0.1995	36.20	9.67	45.87	53.63	-7.76	AVG
3	0.2400	43.11	9.77	52.88	62.10	-9.22	QP
4	0.2400	34.20	9.77	43.97	52.10	-8.13	AVG
5	0.3322	36.91	9.90	46.81	59.40	-12.59	QP
6	0.3322	27.59	9.90	37.49	49.40	-11.91	AVG
7	0.5887	34.04	10.02	44.06	56.00	-11.94	QP
8	0.5887	25.60	10.02	35.62	46.00	-10.38	AVG
9	1.9680	36.68	10.07	46.75	56.00	-9.25	QP
10	1.9680	27.91	10.07	37.98	46.00	-8.02	AVG
11	4.7647	37.05	10.10	47.15	56.00	-8.85	QP
12	4.7647	26.50	10.10	36.60	46.00	-9.40	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

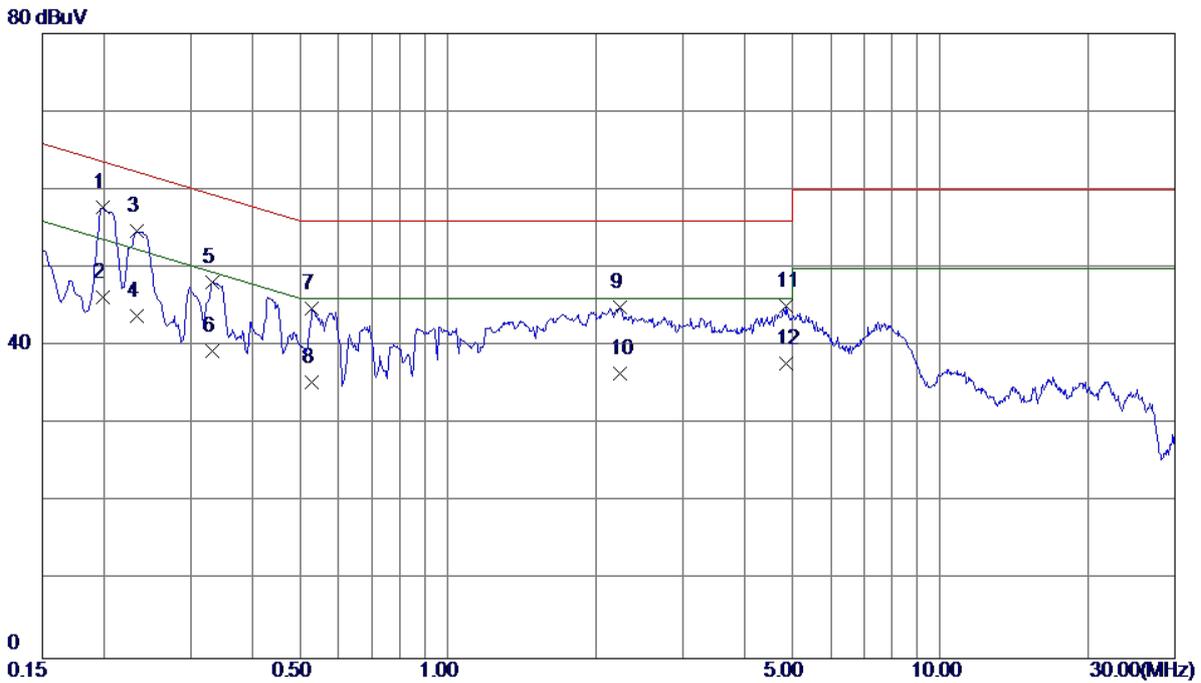


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1 *	0.1995	48.03	9.67	57.70	63.63	-5.93	QP
2	0.1995	36.60	9.67	46.27	53.63	-7.36	AVG
3	0.2333	45.01	9.69	54.70	62.33	-7.63	QP
4	0.2333	34.20	9.69	43.89	52.33	-8.44	AVG
5	0.3322	38.49	9.73	48.22	59.40	-11.18	QP
6	0.3322	29.60	9.73	39.33	49.40	-10.07	AVG
7	0.5302	34.92	9.82	44.74	56.00	-11.26	QP
8	0.5302	25.60	9.82	35.42	46.00	-10.58	AVG
9	2.2335	34.91	10.08	44.99	56.00	-11.01	QP
10	2.2335	26.40	10.08	36.48	46.00	-9.52	AVG
11	4.8750	34.85	10.29	45.14	56.00	-10.86	QP
12	4.8750	27.40	10.29	37.69	46.00	-8.31	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:Luxshare+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

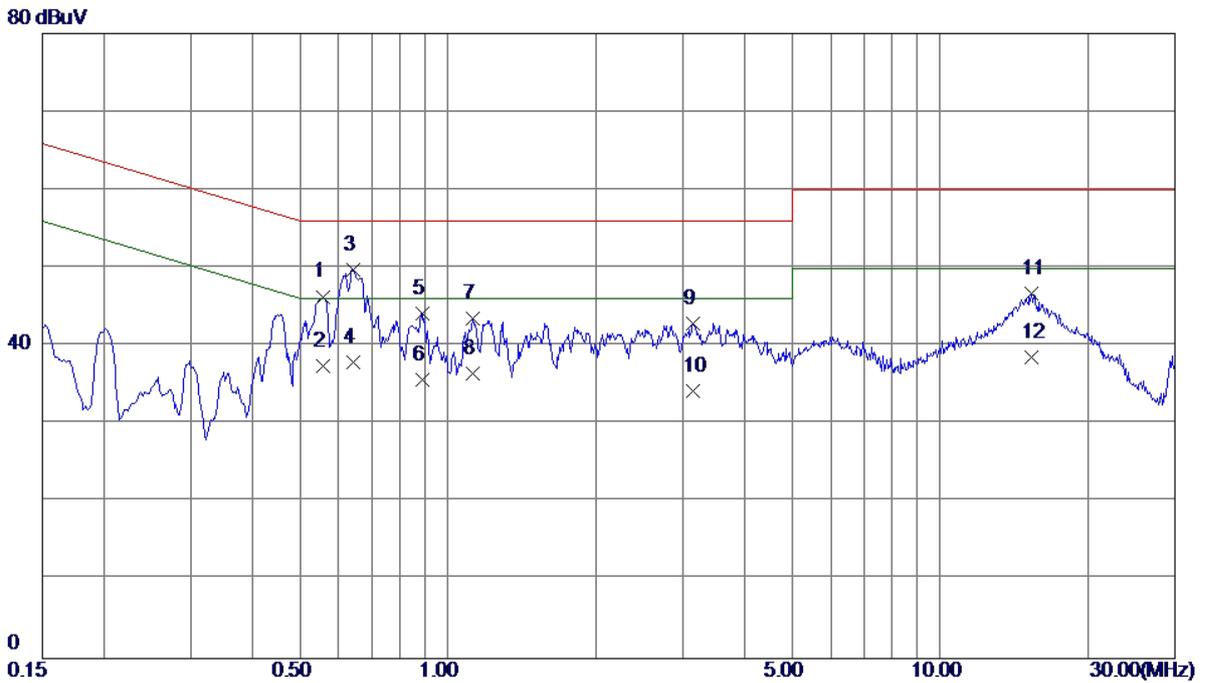


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5571	36.34	9.98	46.32	56.00	-9.68	QP
2	0.5571	27.50	9.98	37.48	46.00	-8.52	AVG
3 *	0.6405	39.65	10.04	49.69	56.00	-6.31	QP
4	0.6405	27.90	10.04	37.94	46.00	-8.06	AVG
5	0.8902	34.10	10.10	44.20	56.00	-11.80	QP
6	0.8902	25.60	10.10	35.70	46.00	-10.30	AVG
7	1.1265	33.28	10.19	43.47	56.00	-12.53	QP
8	1.1265	26.30	10.19	36.49	46.00	-9.51	AVG
9	3.1560	32.87	10.02	42.89	56.00	-13.11	QP
10	3.1560	24.20	10.02	34.22	46.00	-11.78	AVG
11	15.3420	36.09	10.68	46.77	60.00	-13.23	QP
12	15.3420	27.90	10.68	38.58	50.00	-11.42	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:Luxshare+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

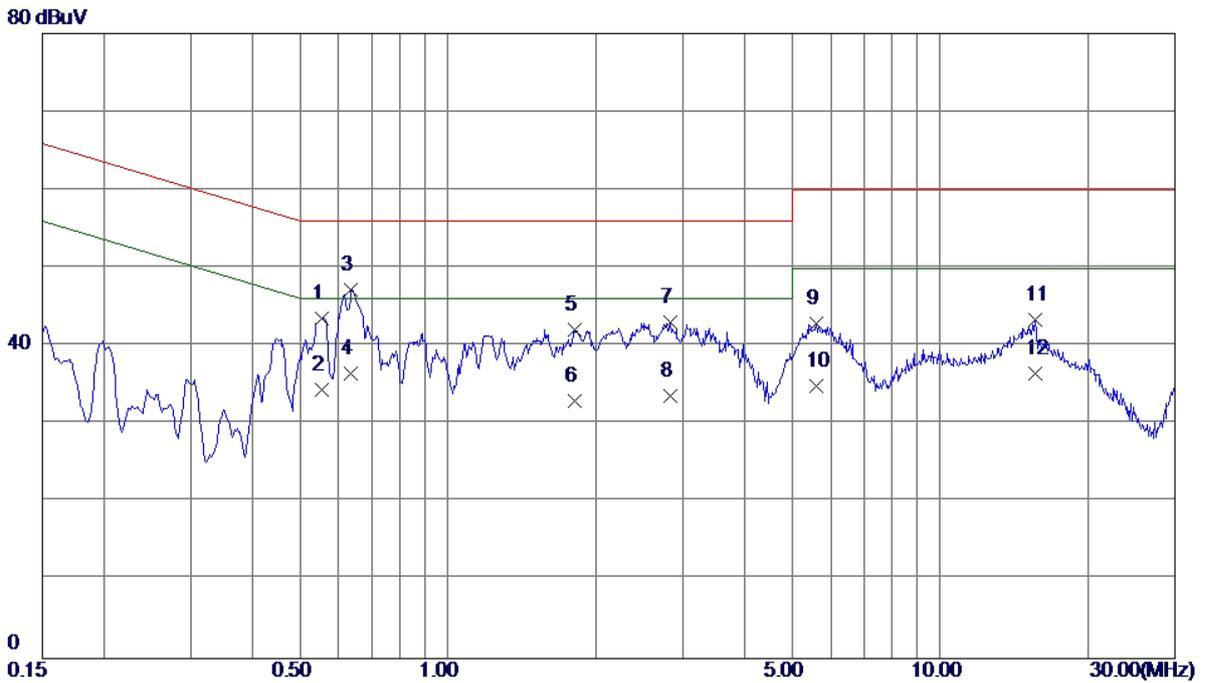


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.5550	33.76	9.82	43.58	56.00	-12.42	QP
2	0.5550	24.60	9.82	34.42	46.00	-11.58	AVG
3 *	0.6360	37.39	9.84	47.23	56.00	-8.77	QP
4	0.6360	26.60	9.84	36.44	46.00	-9.56	AVG
5	1.8060	31.98	10.06	42.04	56.00	-13.96	QP
6	1.8060	22.90	10.06	32.96	46.00	-13.04	AVG
7	2.8343	32.98	10.04	43.02	56.00	-12.98	QP
8	2.8343	23.50	10.04	33.54	46.00	-12.46	AVG
9	5.6063	32.65	10.30	42.95	60.00	-17.05	QP
10	5.6063	24.60	10.30	34.90	50.00	-15.10	AVG
11	15.6188	32.84	10.59	43.43	60.00	-16.57	QP
12	15.6188	25.90	10.59	36.49	50.00	-13.51	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

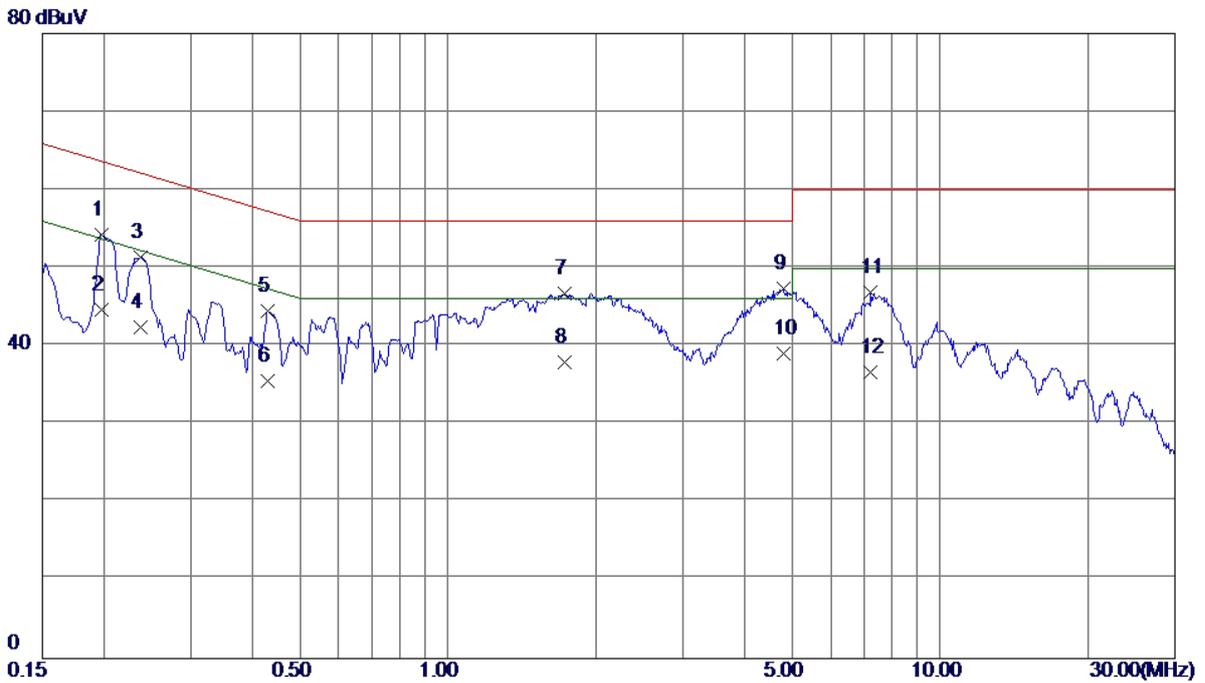


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1973	44.50	9.67	54.17	63.72	-9.55	QP
2	0.1973	34.90	9.67	44.57	53.72	-9.15	AVG
3	0.2378	41.61	9.76	51.37	62.17	-10.80	QP
4	0.2378	32.61	9.76	42.37	52.17	-9.80	AVG
5	0.4312	34.56	9.88	44.44	57.23	-12.79	QP
6	0.4312	25.60	9.88	35.48	47.23	-11.75	AVG
7	1.7295	36.64	10.11	46.75	56.00	-9.25	QP
8	1.7295	27.80	10.11	37.91	46.00	-8.09	AVG
9	4.7963	37.23	10.10	47.33	56.00	-8.67	QP
10 *	4.7963	28.90	10.10	39.00	46.00	-7.00	AVG
11	7.2173	36.66	10.21	46.87	60.00	-13.13	QP
12	7.2173	26.39	10.21	36.60	50.00	-13.40	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

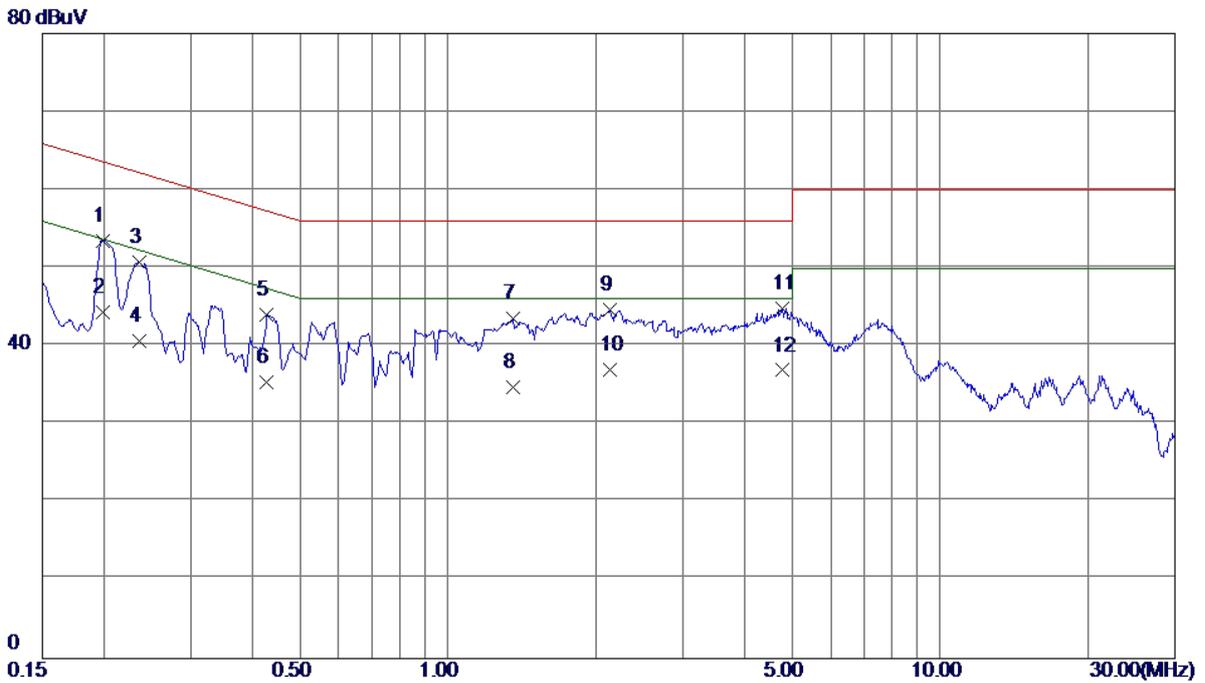


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1995	43.75	9.67	53.42	63.63	-10.21	QP
2	0.1995	34.60	9.67	44.27	53.63	-9.36	AVG
3	0.2355	40.97	9.69	50.66	62.25	-11.59	QP
4	0.2355	30.90	9.69	40.59	52.25	-11.66	AVG
5	0.4290	34.20	9.78	43.98	57.27	-13.29	QP
6	0.4290	25.60	9.78	35.38	47.27	-11.89	AVG
7	1.3538	33.46	9.99	43.45	56.00	-12.55	QP
8	1.3538	24.70	9.99	34.69	46.00	-11.31	AVG
9	2.1390	34.60	10.08	44.68	56.00	-11.32	QP
10 *	2.1390	26.90	10.08	36.98	46.00	-9.02	AVG
11	4.7918	34.46	10.28	44.74	56.00	-11.26	QP
12	4.7918	26.60	10.28	36.88	46.00	-9.12	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

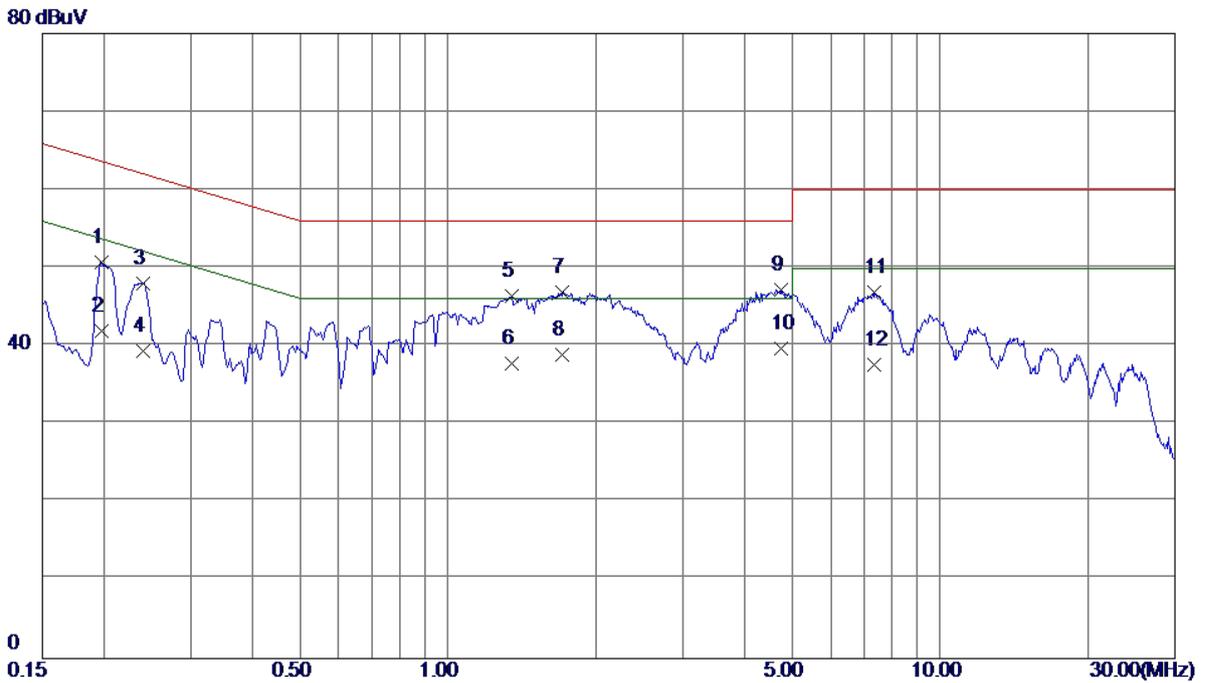


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1973	41.07	9.67	50.74	63.72	-12.98	QP
2	0.1973	32.20	9.67	41.87	53.72	-11.85	AVG
3	0.2400	38.20	9.77	47.97	62.10	-14.13	QP
4	0.2400	29.60	9.77	39.37	52.10	-12.73	AVG
5	1.3493	36.22	10.19	46.41	56.00	-9.59	QP
6	1.3493	27.60	10.19	37.79	46.00	-8.21	AVG
7	1.7070	36.79	10.11	46.90	56.00	-9.10	QP
8	1.7070	28.81	10.11	38.92	46.00	-7.08	AVG
9	4.7445	37.11	10.10	47.21	56.00	-8.79	QP
10 *	4.7445	29.60	10.10	39.70	46.00	-6.30	AVG
11	7.3275	36.61	10.22	46.83	60.00	-13.17	QP
12	7.3275	27.40	10.22	37.62	50.00	-12.38	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

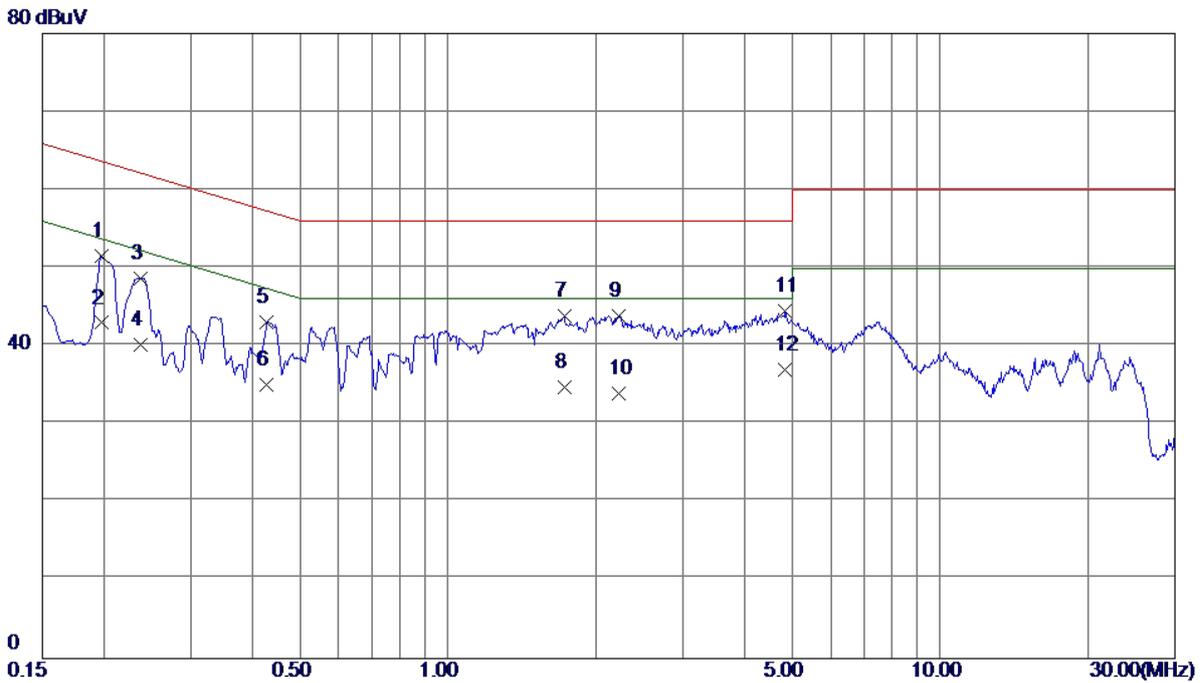


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1973	41.85	9.66	51.51	63.72	-12.21	QP
2	0.1973	33.30	9.66	42.96	53.72	-10.76	AVG
3	0.2378	39.01	9.69	48.70	62.17	-13.47	QP
4	0.2378	30.40	9.69	40.09	52.17	-12.08	AVG
5	0.4290	33.31	9.78	43.09	57.27	-14.18	QP
6	0.4290	25.30	9.78	35.08	47.27	-12.19	AVG
7	1.7228	33.75	10.06	43.81	56.00	-12.19	QP
8	1.7228	24.60	10.06	34.66	46.00	-11.34	AVG
9	2.2200	33.84	10.08	43.92	56.00	-12.08	QP
10	2.2200	23.90	10.08	33.98	46.00	-12.02	AVG
11	4.8503	34.14	10.29	44.43	56.00	-11.57	QP
12 *	4.8503	26.70	10.29	36.99	46.00	-9.01	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

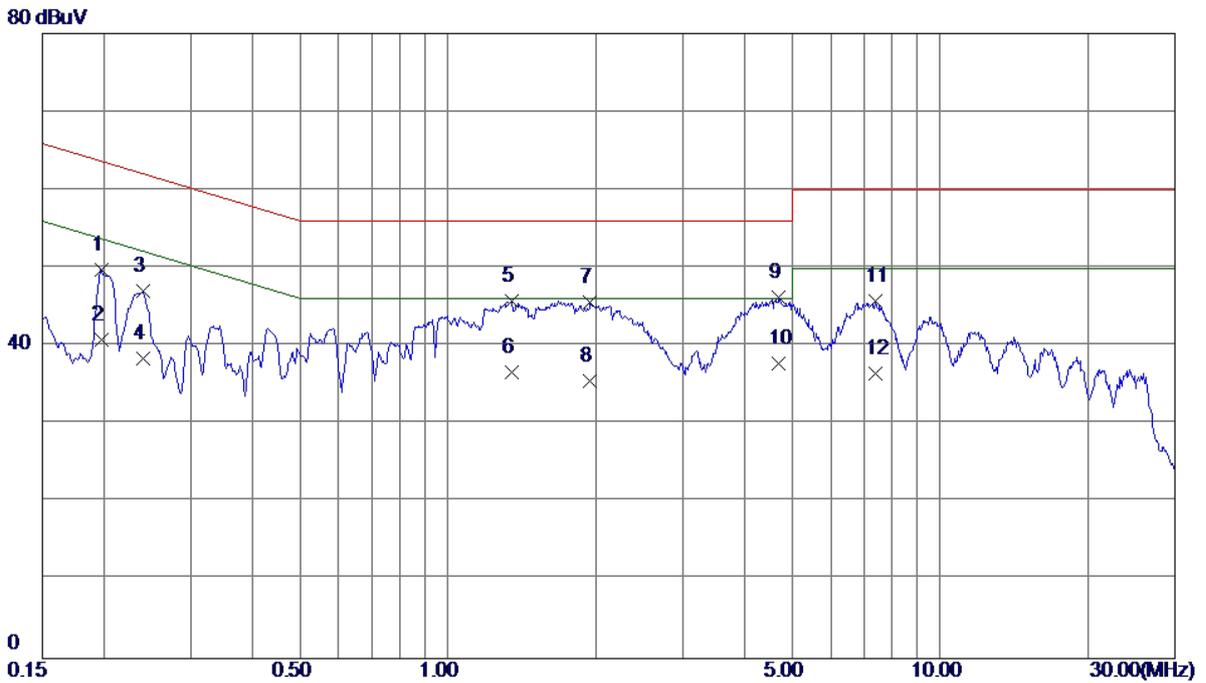


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1973	40.07	9.67	49.74	63.72	-13.98	QP
2	0.1973	31.20	9.67	40.87	53.72	-12.85	AVG
3	0.2400	37.24	9.77	47.01	62.10	-15.09	QP
4	0.2400	28.60	9.77	38.37	52.10	-13.73	AVG
5	1.3493	35.64	10.19	45.83	56.00	-10.17	QP
6	1.3493	26.40	10.19	36.59	46.00	-9.41	AVG
7	1.9433	35.45	10.08	45.53	56.00	-10.47	QP
8	1.9433	25.40	10.08	35.48	46.00	-10.52	AVG
9	4.7040	36.10	10.10	46.20	56.00	-9.80	QP
10 *	4.7040	27.70	10.10	37.80	46.00	-8.20	AVG
11	7.3703	35.47	10.22	45.69	60.00	-14.31	QP
12	7.3703	26.30	10.22	36.52	50.00	-13.48	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

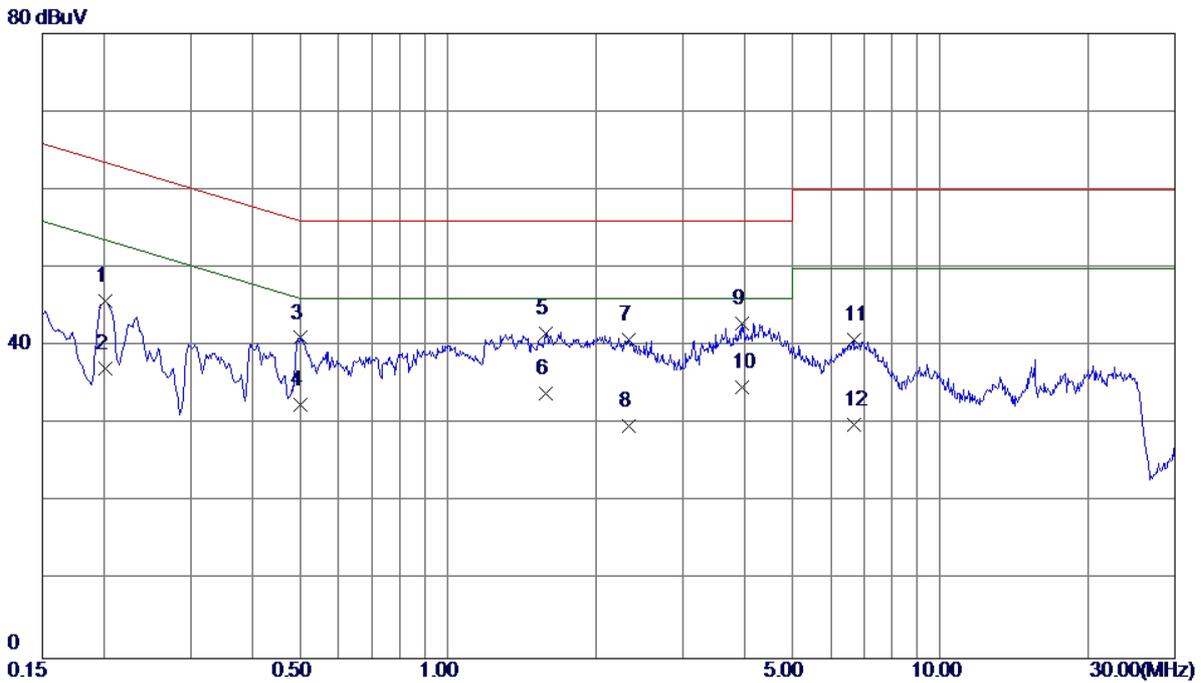


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2017	36.15	9.67	45.82	63.54	-17.72	QP
2	0.2017	27.40	9.67	37.07	53.54	-16.47	AVG
3	0.5010	31.23	9.81	41.04	56.00	-14.96	QP
4	0.5010	22.60	9.81	32.41	46.00	-13.59	AVG
5	1.5765	31.58	10.05	41.63	56.00	-14.37	QP
6	1.5765	23.90	10.05	33.95	46.00	-12.05	AVG
7	2.3280	30.67	10.09	40.76	56.00	-15.24	QP
8	2.3280	19.60	10.09	29.69	46.00	-16.31	AVG
9	3.9705	32.77	10.16	42.93	56.00	-13.07	QP
10 *	3.9705	24.50	10.16	34.66	46.00	-11.34	AVG
11	6.6795	30.50	10.29	40.79	60.00	-19.21	QP
12	6.6795	19.60	10.29	29.89	50.00	-20.11	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

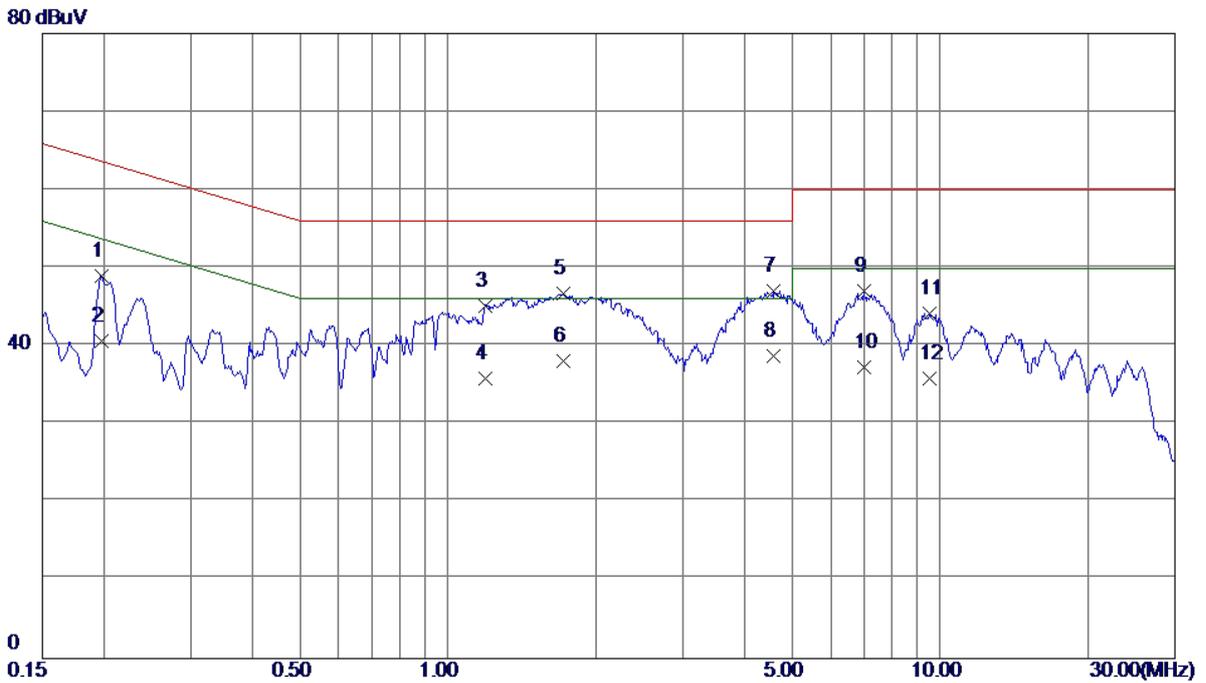


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1973	39.36	9.67	49.03	63.72	-14.69	QP
2	0.1973	31.00	9.67	40.67	53.72	-13.05	AVG
3	1.1895	34.84	10.22	45.06	56.00	-10.94	QP
4	1.1895	25.60	10.22	35.82	46.00	-10.18	AVG
5	1.7160	36.56	10.11	46.67	56.00	-9.33	QP
6	1.7160	27.91	10.11	38.02	46.00	-7.98	AVG
7	4.6005	37.00	10.09	47.09	56.00	-8.91	QP
8 *	4.6005	28.60	10.09	38.69	46.00	-7.31	AVG
9	6.9990	36.89	10.18	47.07	60.00	-12.93	QP
10	6.9990	27.10	10.18	37.28	50.00	-12.72	AVG
11	9.5077	33.77	10.42	44.19	60.00	-15.81	QP
12	9.5077	25.40	10.42	35.82	50.00	-14.18	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

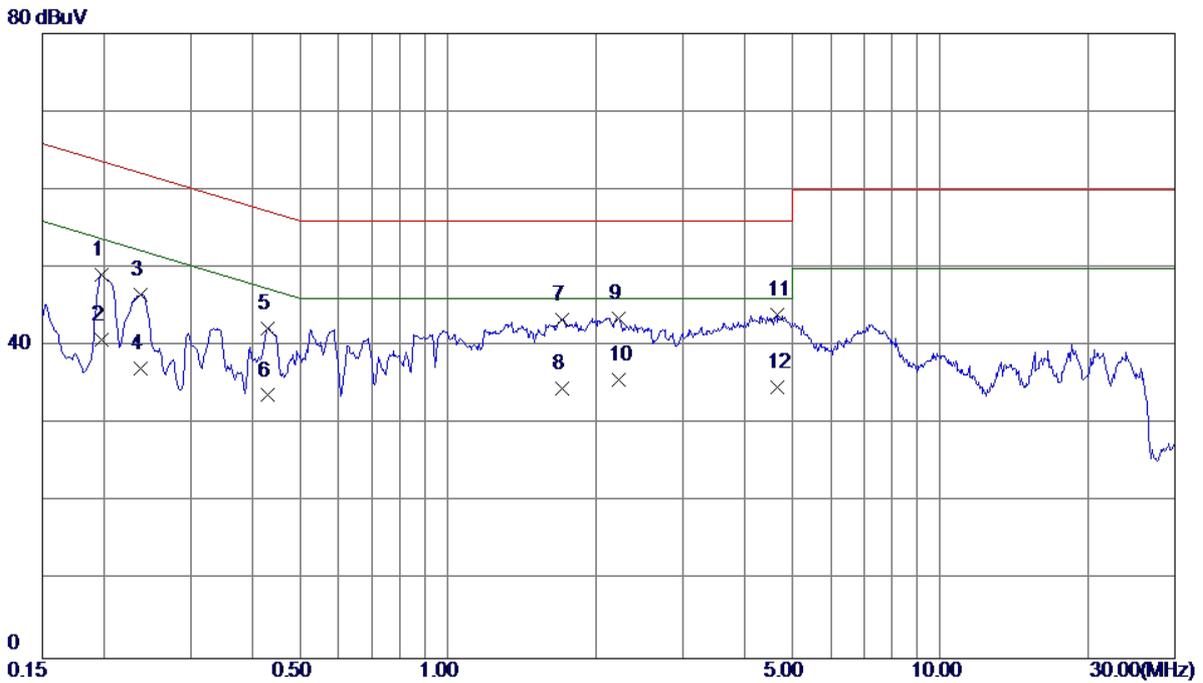


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1973	39.51	9.66	49.17	63.72	-14.55	QP
2	0.1973	31.20	9.66	40.86	53.72	-12.86	AVG
3	0.2378	36.89	9.69	46.58	62.17	-15.59	QP
4	0.2378	27.40	9.69	37.09	52.17	-15.08	AVG
5	0.4312	32.51	9.78	42.29	57.23	-14.94	QP
6	0.4312	23.90	9.78	33.68	47.23	-13.55	AVG
7	1.7048	33.30	10.06	43.36	56.00	-12.64	QP
8	1.7048	24.50	10.06	34.56	46.00	-11.44	AVG
9	2.2177	33.51	10.08	43.59	56.00	-12.41	QP
10 *	2.2177	25.60	10.08	35.68	46.00	-10.32	AVG
11	4.6680	33.72	10.26	43.98	56.00	-12.02	QP
12	4.6680	24.40	10.26	34.66	46.00	-11.34	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Line
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

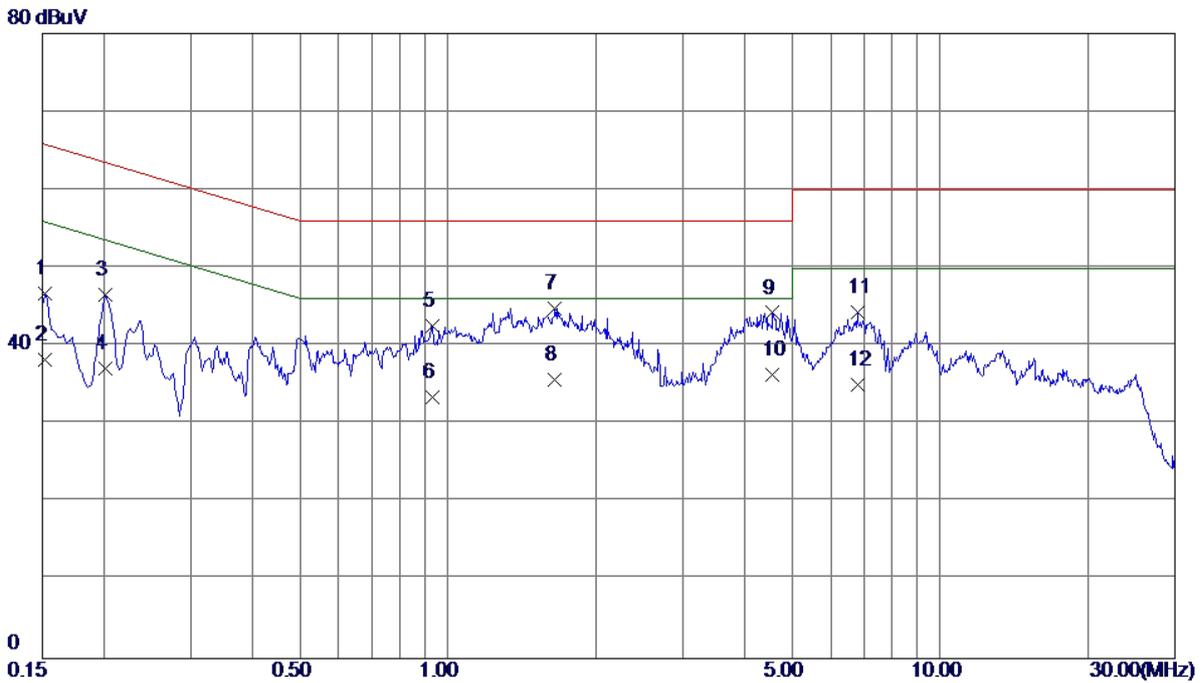

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.1522	37.09	9.64	46.73	65.88	-19.15	QP
2	0.1522	28.60	9.64	38.24	55.88	-17.64	AVG
3	0.2017	36.87	9.67	46.54	63.54	-17.00	QP
4	0.2017	27.40	9.67	37.07	53.54	-16.47	AVG
5	0.9285	32.50	10.11	42.61	56.00	-13.39	QP
6	0.9285	23.30	10.11	33.41	46.00	-12.59	AVG
7	1.6463	34.71	10.12	44.83	56.00	-11.17	QP
8	1.6463	25.60	10.12	35.72	46.00	-10.28	AVG
9	4.5555	34.15	10.09	44.24	56.00	-11.76	QP
10 *	4.5555	26.30	10.09	36.39	46.00	-9.61	AVG
11	6.8010	34.16	10.18	44.34	60.00	-15.66	QP
12	6.8010	24.90	10.18	35.08	50.00	-14.92	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	53%
Test Voltage	AC 120V/60Hz	Phase	Neutral
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:Phitek+USB Cable:Luxshare +Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 26, 2016		

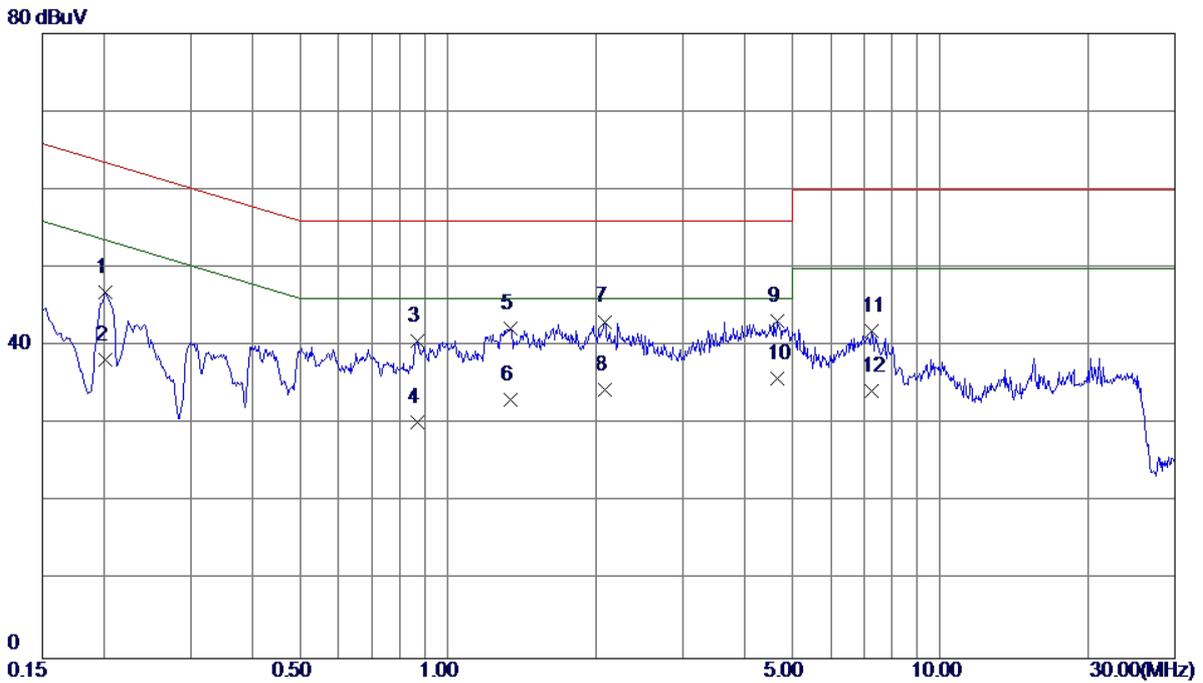

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector
1	0.2017	37.14	9.67	46.81	63.54	-16.73	QP
2	0.2017	28.60	9.67	38.27	53.54	-15.27	AVG
3	0.8655	30.73	9.89	40.62	56.00	-15.38	QP
4	0.8655	20.30	9.89	30.19	46.00	-15.81	AVG
5	1.3380	32.32	9.98	42.30	56.00	-13.70	QP
6	1.3380	23.11	9.98	33.09	46.00	-12.91	AVG
7	2.0827	33.05	10.07	43.12	56.00	-12.88	QP
8	2.0827	24.40	10.07	34.47	46.00	-11.53	AVG
9	4.6703	32.94	10.26	43.20	56.00	-12.80	QP
10 *	4.6703	25.60	10.26	35.86	46.00	-10.14	AVG
11	7.2555	31.62	10.28	41.90	60.00	-18.10	QP
12	7.2555	24.00	10.28	34.28	50.00	-15.72	AVG

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Below 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

Above 1 GHz

Measurement Method and Applied Limits:

ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

NOTE:

- (1) The limit for radiated test was performed according to as following:
FCC Part 15, Subpart B
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:
Measurement Value = Reading Level + Correct Factor
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
Margin Level = Measurement Value - Limit Value

4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 27, 2017
2	Amplifier	HP	8447D	2944A09673	Nov. 09, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz-1GHz)	C-01	Jun. 27, 2017
5	Control	CT	SC100	N/A	N/A
6	Position Control	MF	MF-7802	MF780208416	N/A
7	Antenna	ETS	3115	00075789	Mar. 27, 2017
8	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
9	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
10	Test Cable	emci	EMC104-SM-SM-10000(1GHz – 26.5GHz)	C-68	Jun. 27, 2017
11	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

4.2.3 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

Note:

For measurement of frequency 1GHz -40GHz, the EUT was set 3 meters away from the receiver antenna.

Emission level (dBuV/m)=20log Emission level (uV/m).

The limits above 18GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1m

Distance extrapolation factor = 20 log (3m/1m) dB ;


Limit line = specific limits (dBuV) + 9.5 dB.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

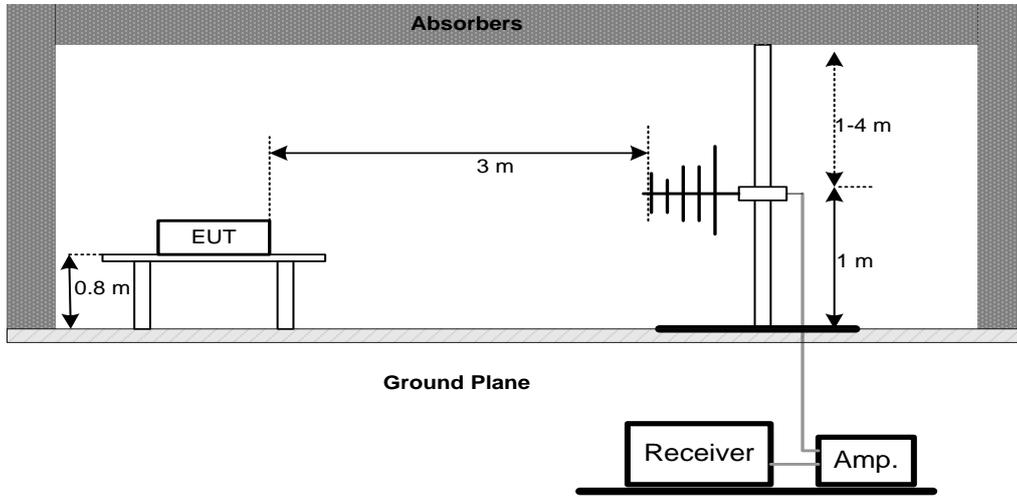

(B) Radiated Emission Test Set-Up Frequency 1 GHz-18GHz

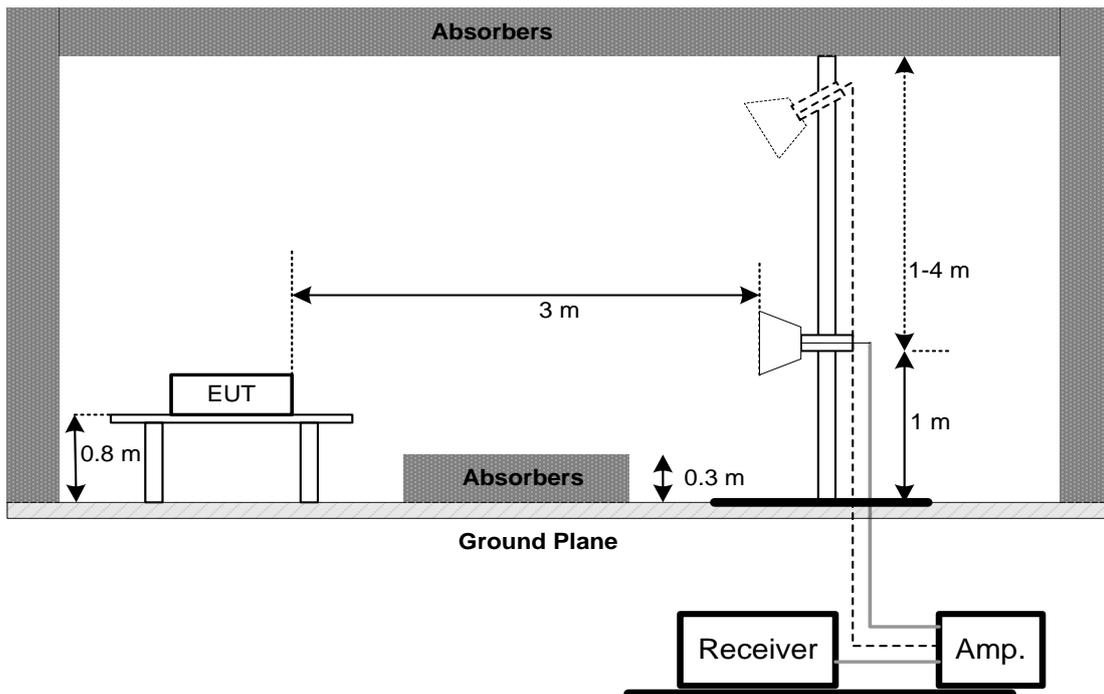

(C) Radiated Emission Test Set-Up Frequency 18 GHz-40GHz

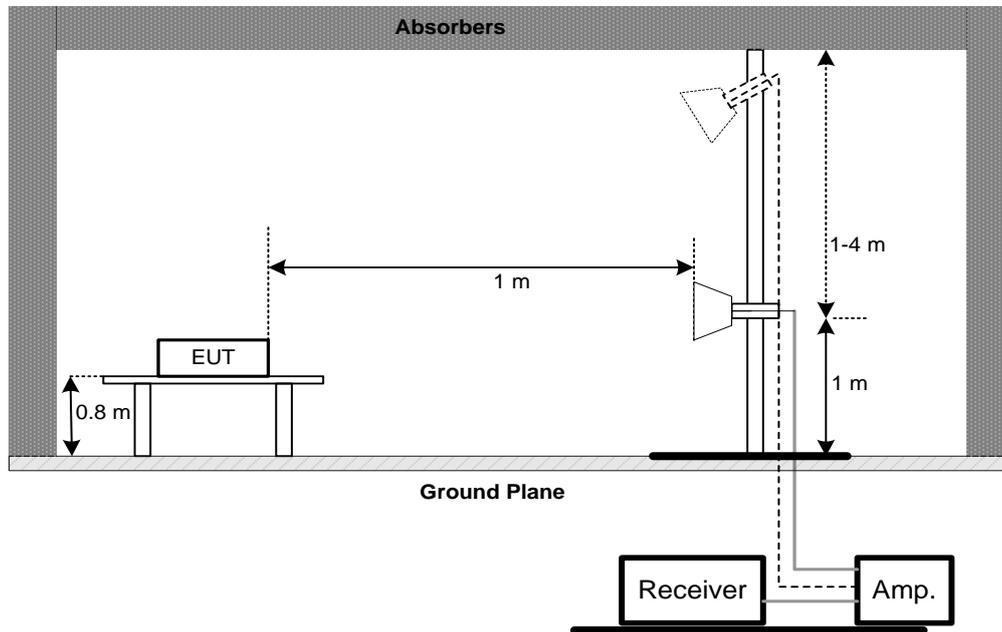

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 unless otherwise a special operating condition is specified in the follows during the testing.


4.2.7 TEST RESULTS-BELOW 1GHZ

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (2) Measuring frequency range from 30MHz to 1000MHz ◦
- (3) If the peak scan value lower limit more than 20dB, then this signal data does not show in table ◦


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

80 dBuV/m

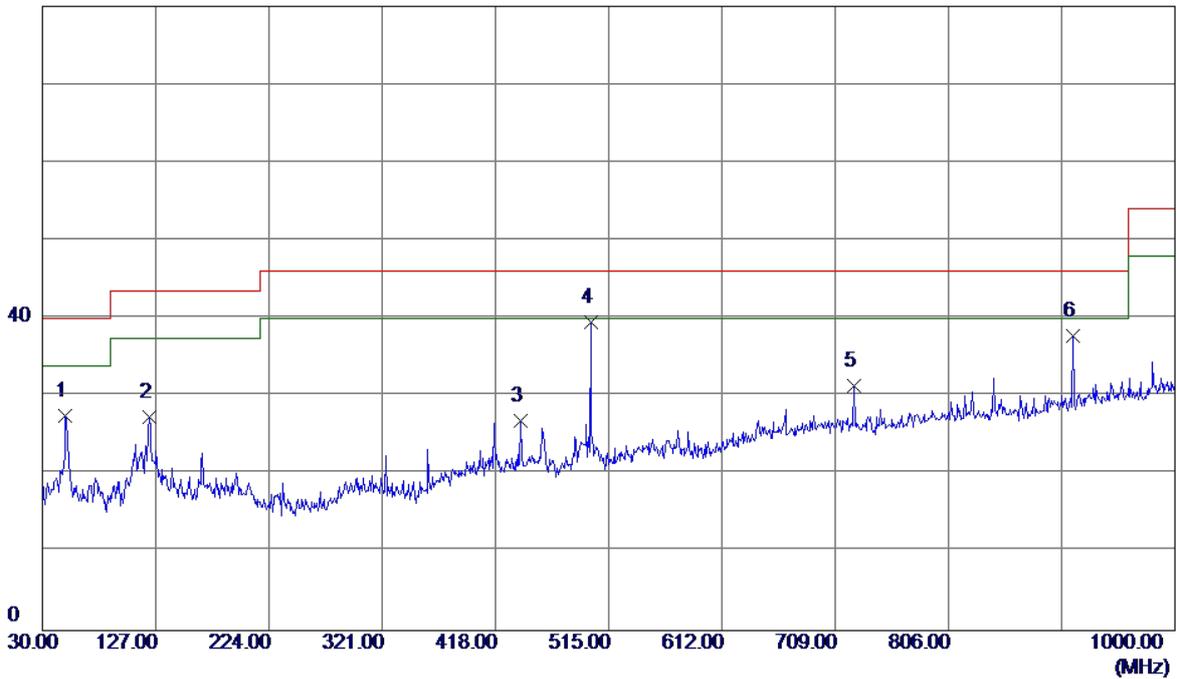

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	49.8849	39.60	-12.05	27.55	40.00	-12.45	QP
2	121.6650	39.66	-12.36	27.30	43.50	-16.20	QP
3	439.8250	34.01	-7.10	26.91	46.00	-19.09	QP
4 *	499.9650	47.17	-7.65	39.52	46.00	-6.48	QP
5	725.0050	32.16	-0.76	31.40	46.00	-14.60	QP
6	912.7000	35.75	2.07	37.82	46.00	-8.18	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

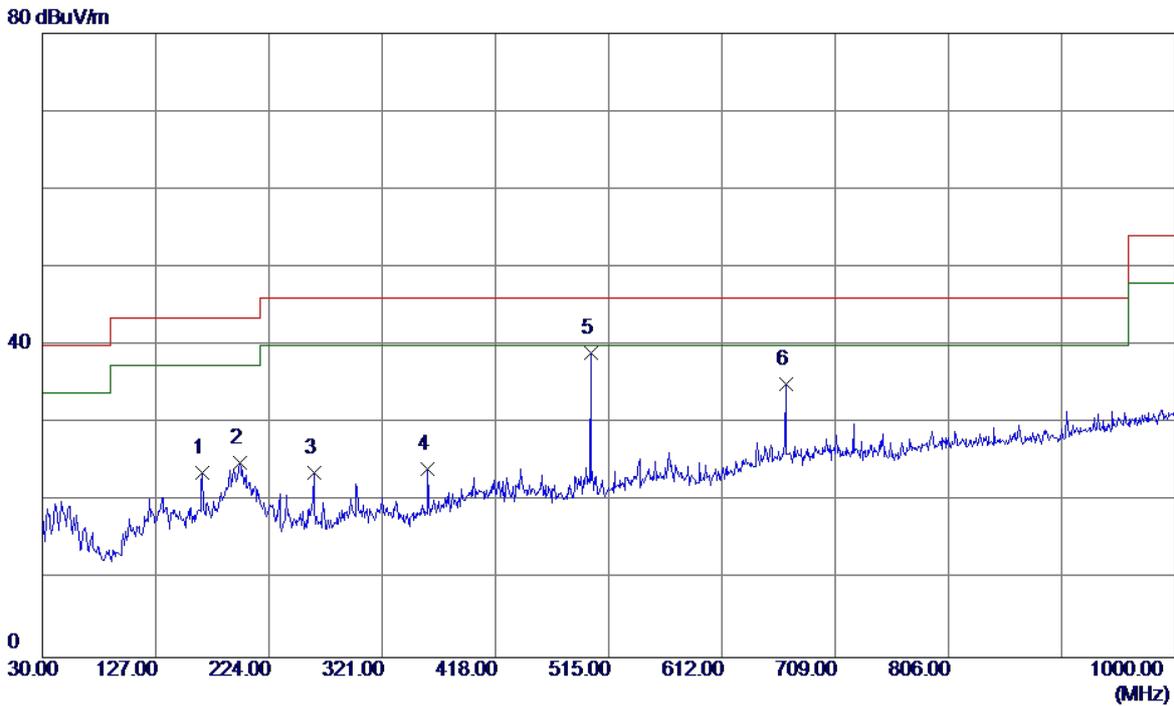

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	166.7700	34.97	-11.30	23.67	43.50	-19.83	QP
2	199.2650	38.56	-13.61	24.95	43.50	-18.55	QP
3	262.3150	36.45	-12.71	23.74	46.00	-22.26	QP
4	359.8000	34.17	-10.07	24.10	46.00	-21.90	QP
5 *	499.9650	46.62	-7.65	38.97	46.00	-7.03	QP
6	666.8050	36.44	-1.34	35.10	46.00	-10.90	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		


80 dBuV/m

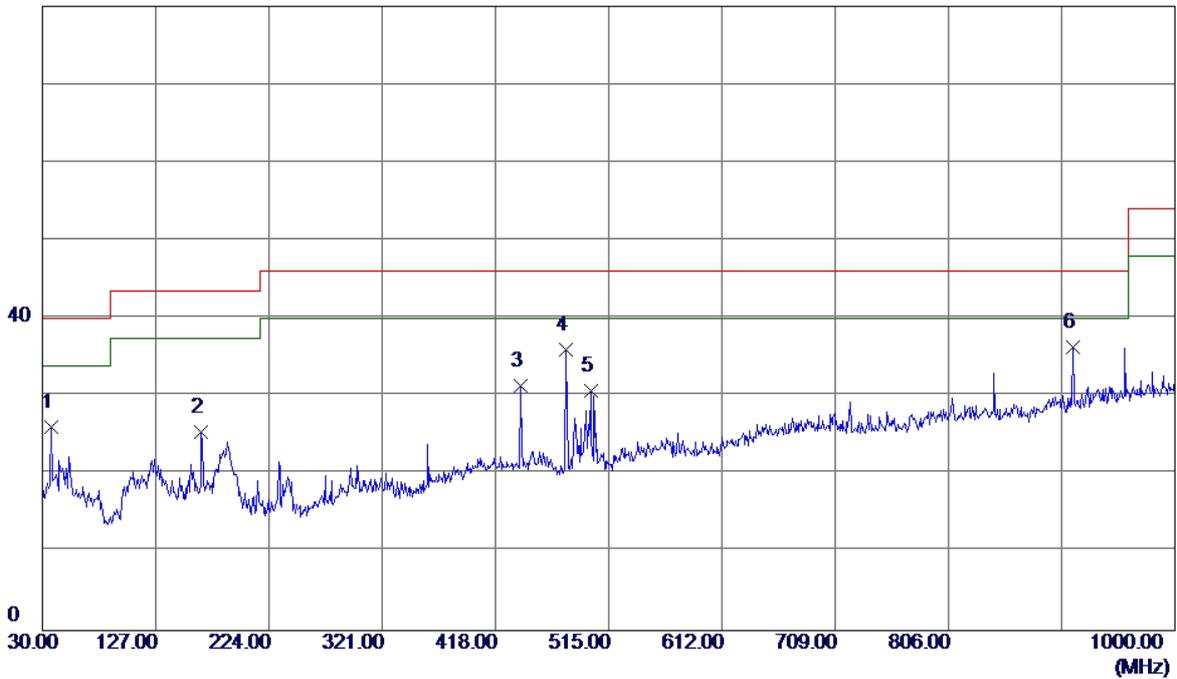

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	37.7599	38.90	-12.88	26.02	40.00	-13.98	QP
2	165.8000	36.85	-11.48	25.37	43.50	-18.13	QP
3	439.3400	38.42	-7.10	31.32	46.00	-14.68	QP
4	478.6250	43.40	-7.40	36.00	46.00	-10.00	QP
5	499.9650	38.38	-7.65	30.73	46.00	-15.27	QP
6 *	912.7000	34.25	2.07	36.32	46.00	-9.68	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		


80 dBuV/m

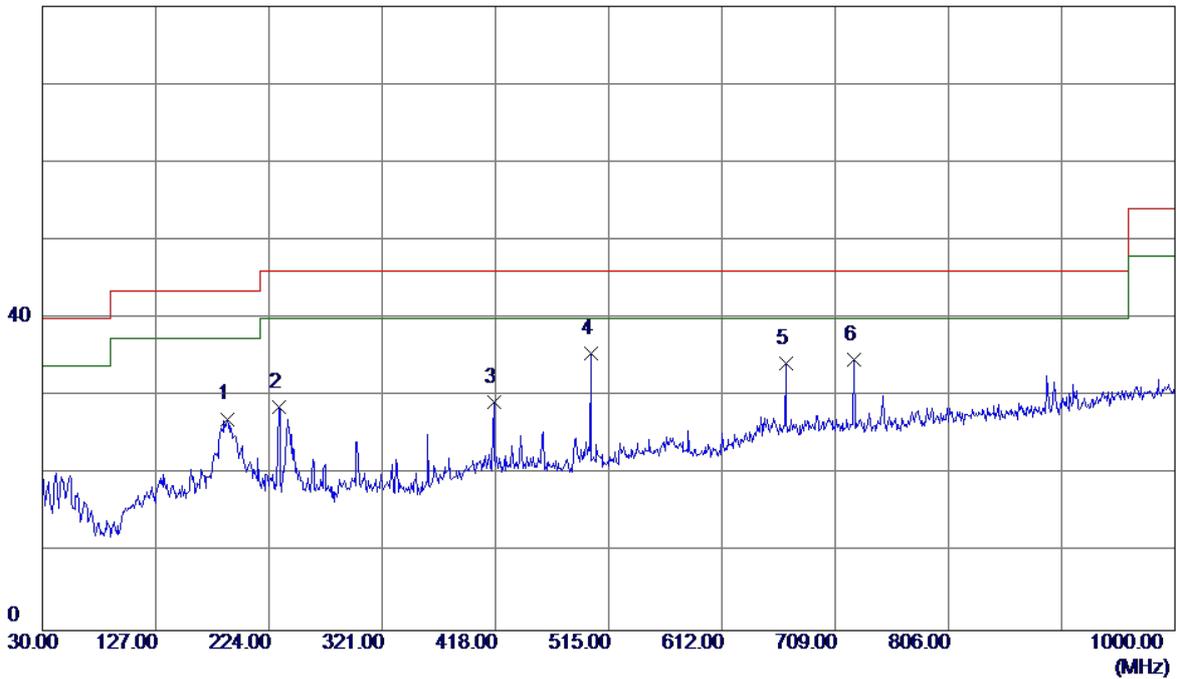

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	188.5950	40.17	-13.05	27.12	43.50	-16.38	QP
2	232.2450	41.61	-13.02	28.59	46.00	-17.41	QP
3	416.5450	36.40	-7.16	29.24	46.00	-16.76	QP
4 *	499.9650	43.13	-7.65	35.48	46.00	-10.52	QP
5	666.8050	35.57	-1.34	34.23	46.00	-11.77	QP
6	725.0050	35.51	-0.76	34.75	46.00	-11.25	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		


80 dBuV/m

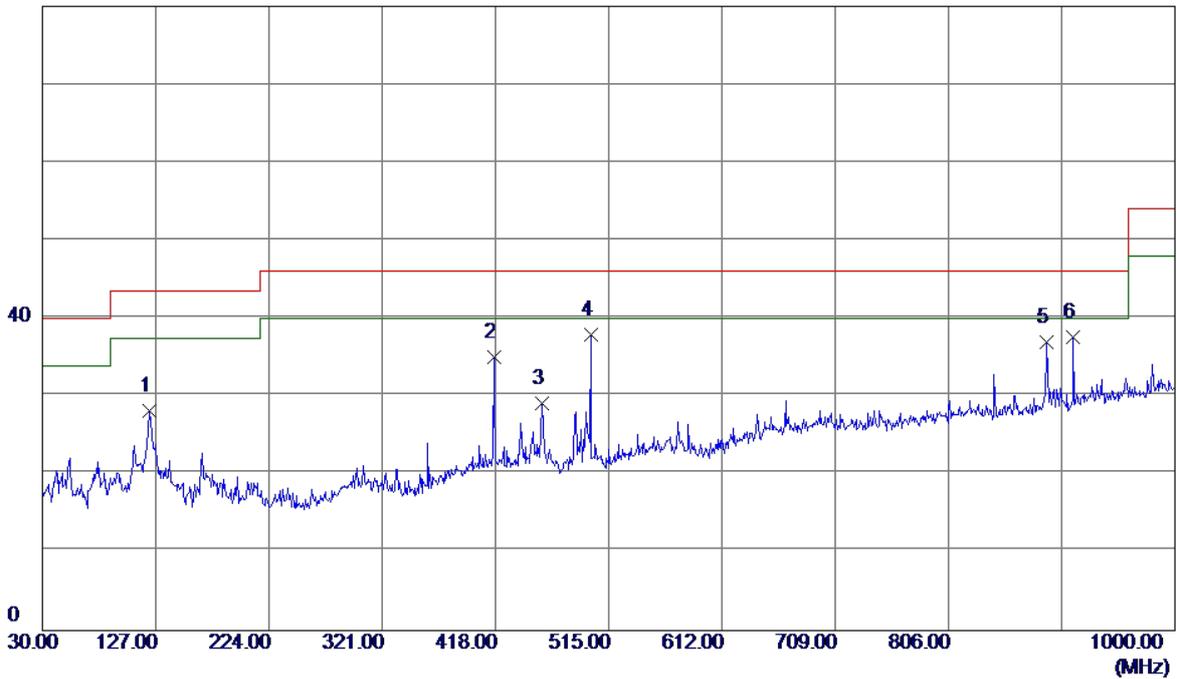

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	121.6650	40.45	-12.36	28.09	43.50	-15.41	QP
2	416.5450	42.17	-7.16	35.01	46.00	-10.99	QP
3	458.2550	36.22	-7.17	29.05	46.00	-16.95	QP
4 *	499.9650	45.61	-7.65	37.96	46.00	-8.04	QP
5	890.3900	35.55	1.47	37.02	46.00	-8.98	QP
6	912.7000	35.51	2.07	37.58	46.00	-8.42	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

80 dBuV/m

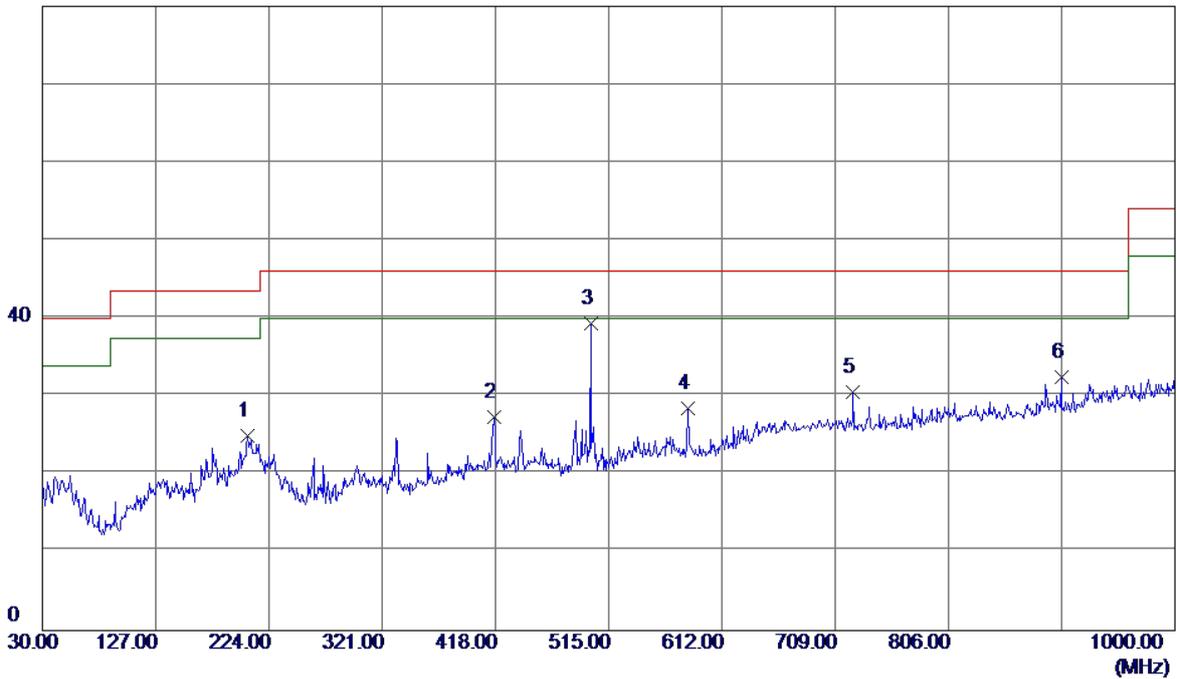

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	206.0549	38.93	-13.92	25.01	43.50	-18.49	QP
2	416.5450	34.58	-7.16	27.42	46.00	-18.58	QP
3 *	499.9650	47.00	-7.65	39.35	46.00	-6.65	QP
4	583.3850	33.11	-4.70	28.41	46.00	-17.59	QP
5	724.5200	31.29	-0.76	30.53	46.00	-15.47	QP
6	902.5150	30.72	1.76	32.48	46.00	-13.52	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FOXCONN+Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

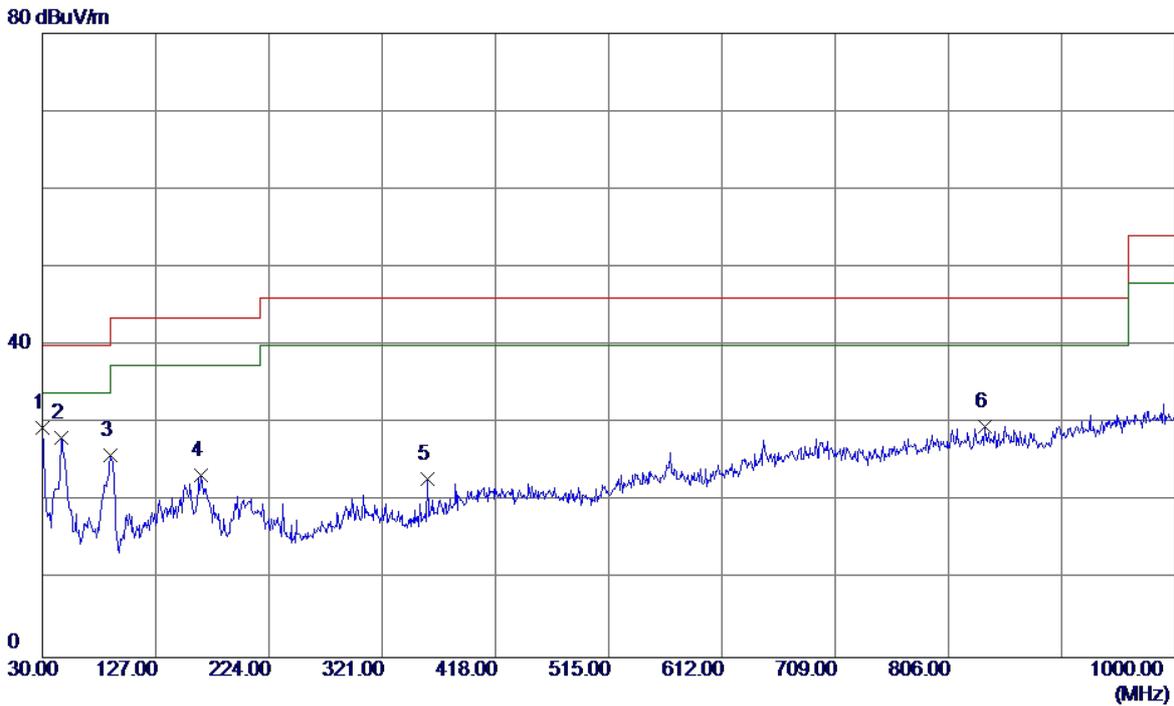

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	42.21	-12.80	29.41	40.00	-10.59	QP
2	46.0050	40.19	-12.07	28.12	40.00	-11.88	QP
3	88.6850	42.21	-16.36	25.85	43.50	-17.65	QP
4	166.2850	34.75	-11.39	23.36	43.50	-20.14	QP
5	359.8000	32.89	-10.07	22.82	46.00	-23.18	QP
6	837.0400	29.02	0.60	29.62	46.00	-16.38	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FOXCONN+Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

80 dBuV/m

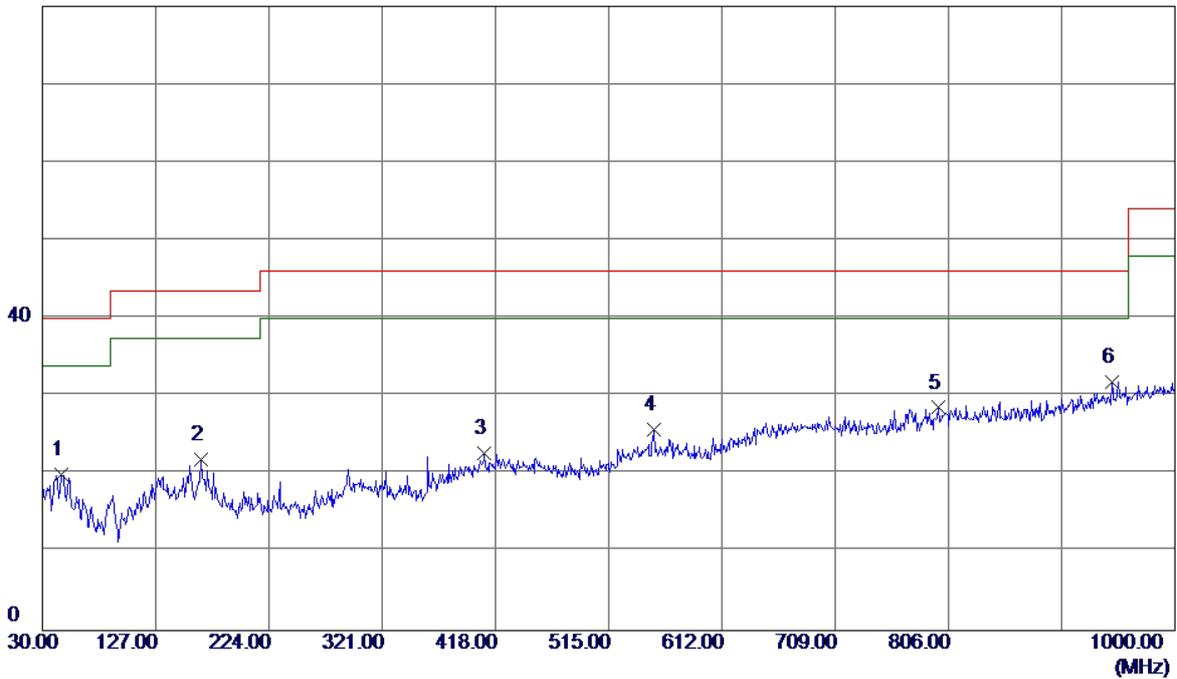

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	46.0050	32.02	-12.07	19.95	40.00	-20.05	QP
2	165.8000	33.44	-11.48	21.96	43.50	-21.54	QP
3	408.3000	29.87	-7.18	22.69	46.00	-23.31	QP
4	554.2849	30.21	-4.47	25.74	46.00	-20.26	QP
5	797.7550	28.02	0.54	28.56	46.00	-17.44	QP
6 *	946.1650	28.71	3.09	31.80	46.00	-14.20	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

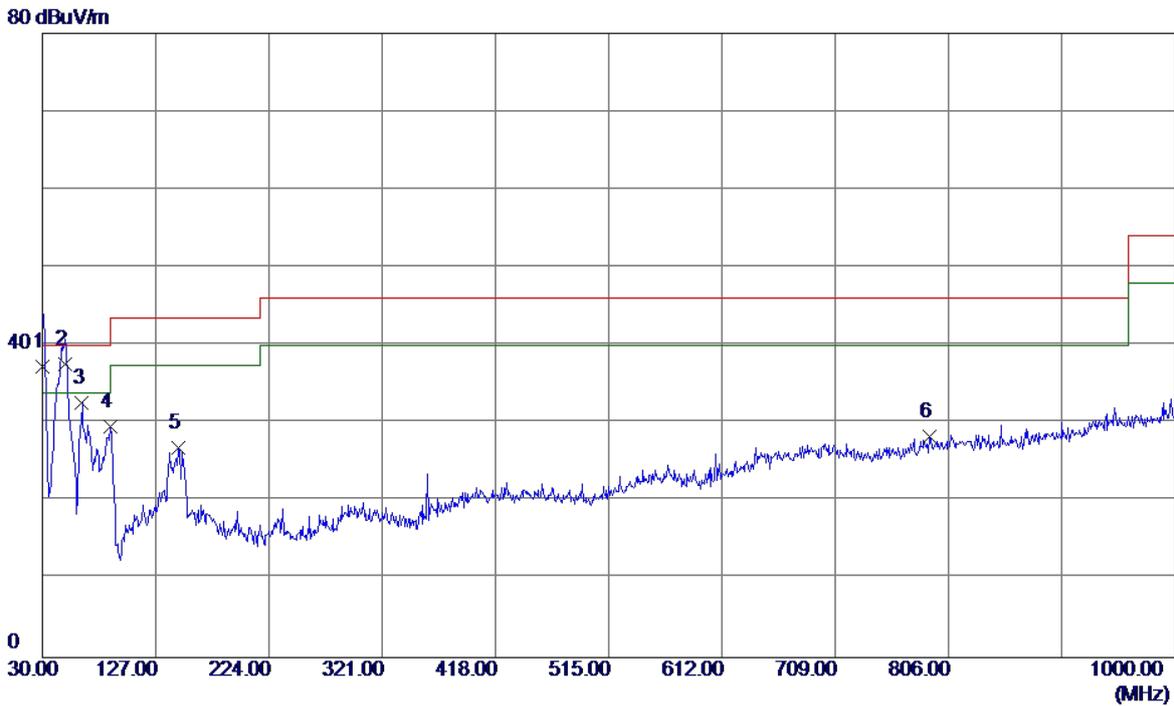

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	50.06	-12.80	37.26	40.00	-2.74	QP
2 *	49.8600	49.59	-12.06	37.53	40.00	-2.47	QP
3	63.9500	46.44	-13.85	32.59	40.00	-7.41	QP
4	88.2000	45.92	-16.34	29.58	43.50	-13.92	QP
5	145.9149	38.76	-11.90	26.86	43.50	-16.64	QP
6	789.5100	27.97	0.30	28.27	46.00	-17.73	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		


80 dBuV/m

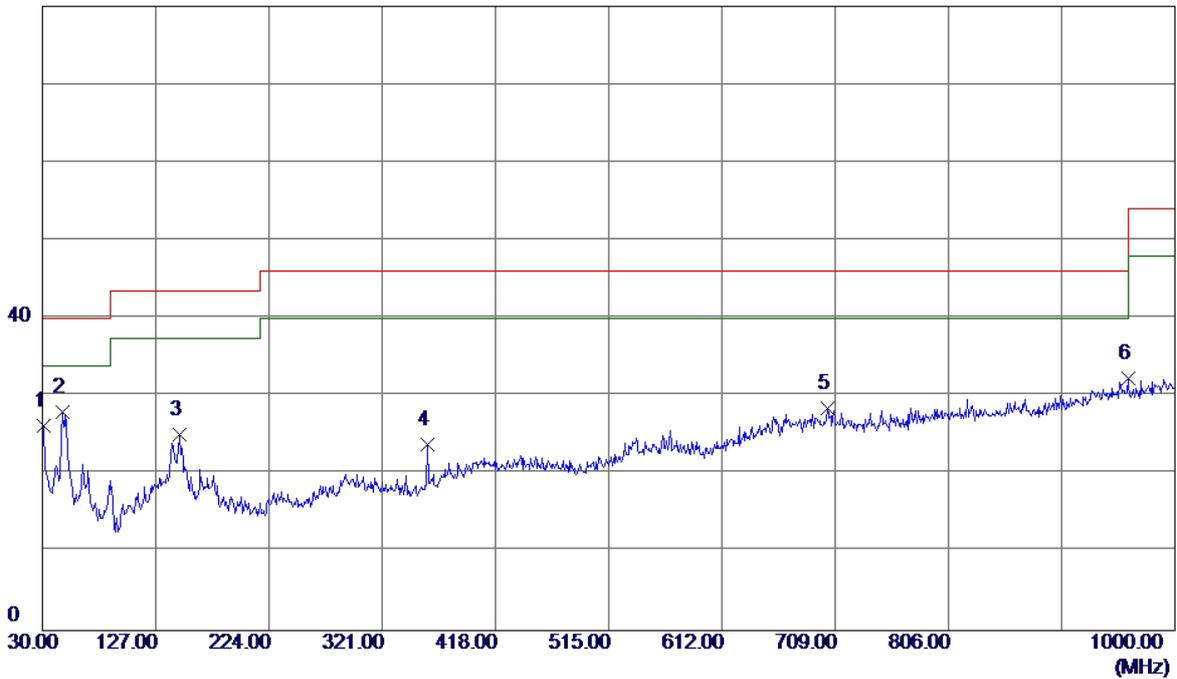

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.9700	39.19	-12.99	26.20	40.00	-13.80	QP
2 *	46.9750	40.27	-12.25	28.02	40.00	-11.98	QP
3	147.8550	37.00	-11.91	25.09	43.50	-18.41	QP
4	359.8000	33.88	-10.07	23.81	46.00	-22.19	QP
5	702.2100	29.09	-0.66	28.43	46.00	-17.57	QP
6	959.7450	29.03	3.35	32.38	46.00	-13.62	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

80 dBuV/m

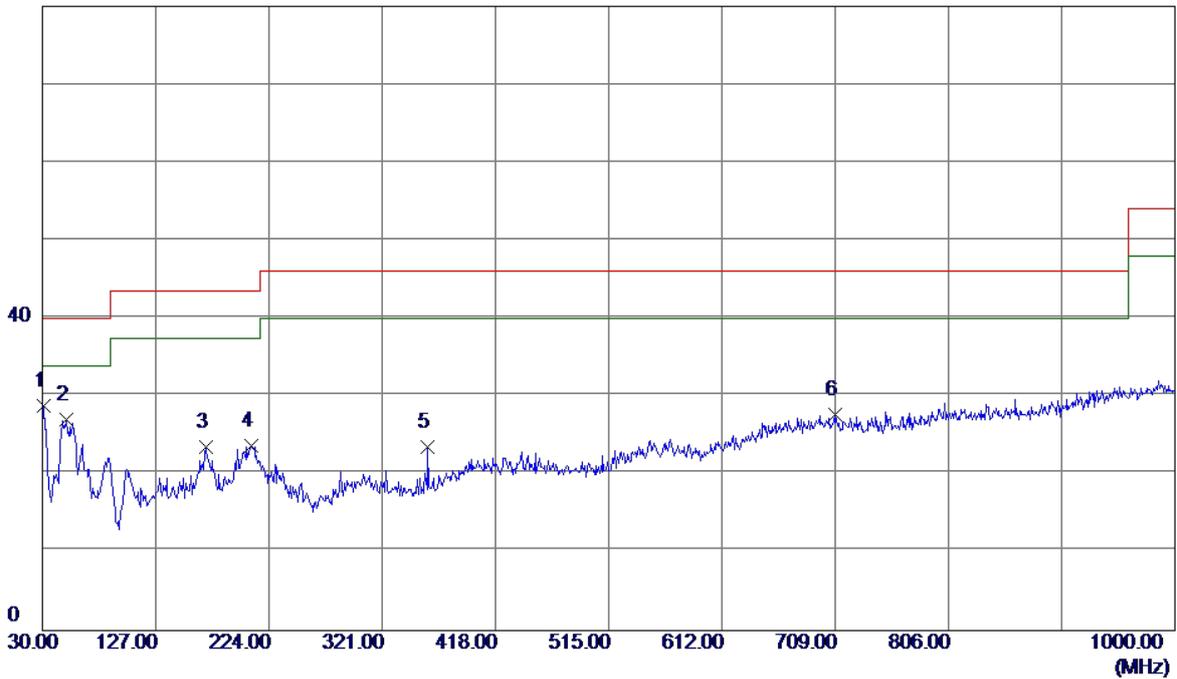


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	31.4550	41.82	-13.08	28.74	40.00	-11.26	QP
2	50.3700	39.21	-12.12	27.09	40.00	-12.91	QP
3	169.6799	34.26	-10.76	23.50	43.50	-20.00	QP
4	208.9650	37.71	-14.05	23.66	43.50	-19.84	QP
5	359.8000	33.60	-10.07	23.53	46.00	-22.47	QP
6	708.5150	28.30	-0.69	27.61	46.00	-18.39	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

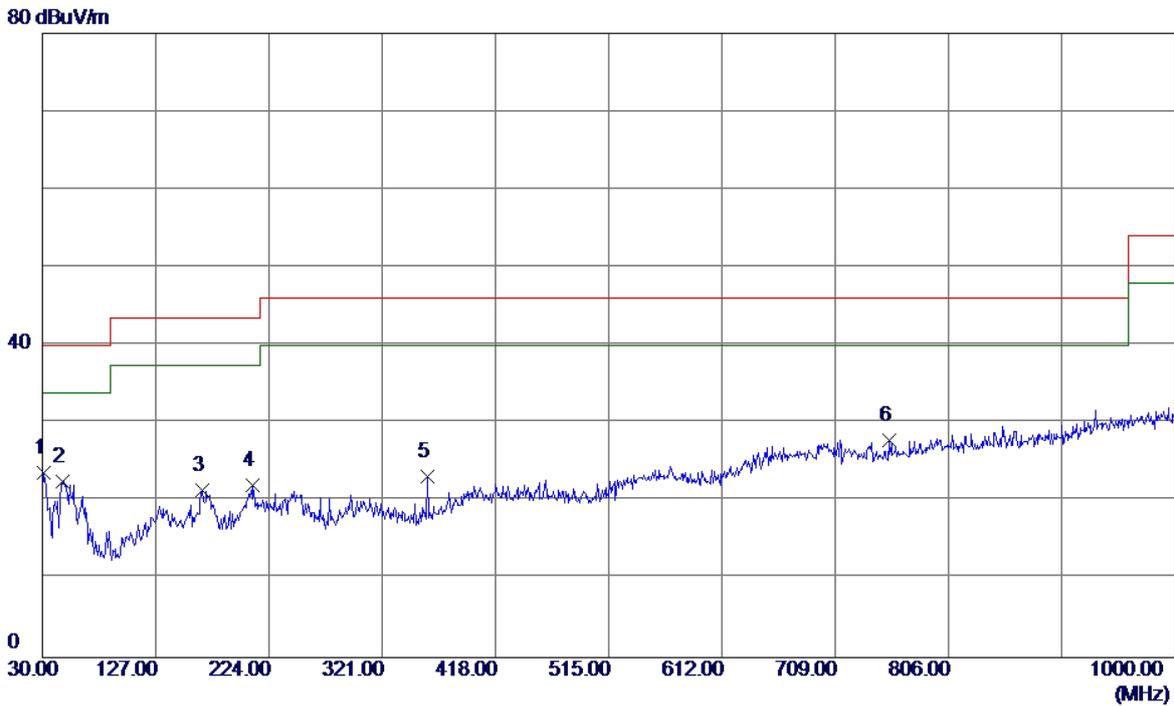


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9700	36.65	-12.99	23.66	40.00	-16.34	QP
2	46.9750	34.80	-12.25	22.55	40.00	-17.45	QP
3	167.2550	32.66	-11.21	21.45	43.50	-22.05	QP
4	210.4200	36.10	-14.09	22.01	43.50	-21.49	QP
5	359.8000	33.34	-10.07	23.27	46.00	-22.73	QP
6	755.0750	28.54	-0.72	27.82	46.00	-18.18	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

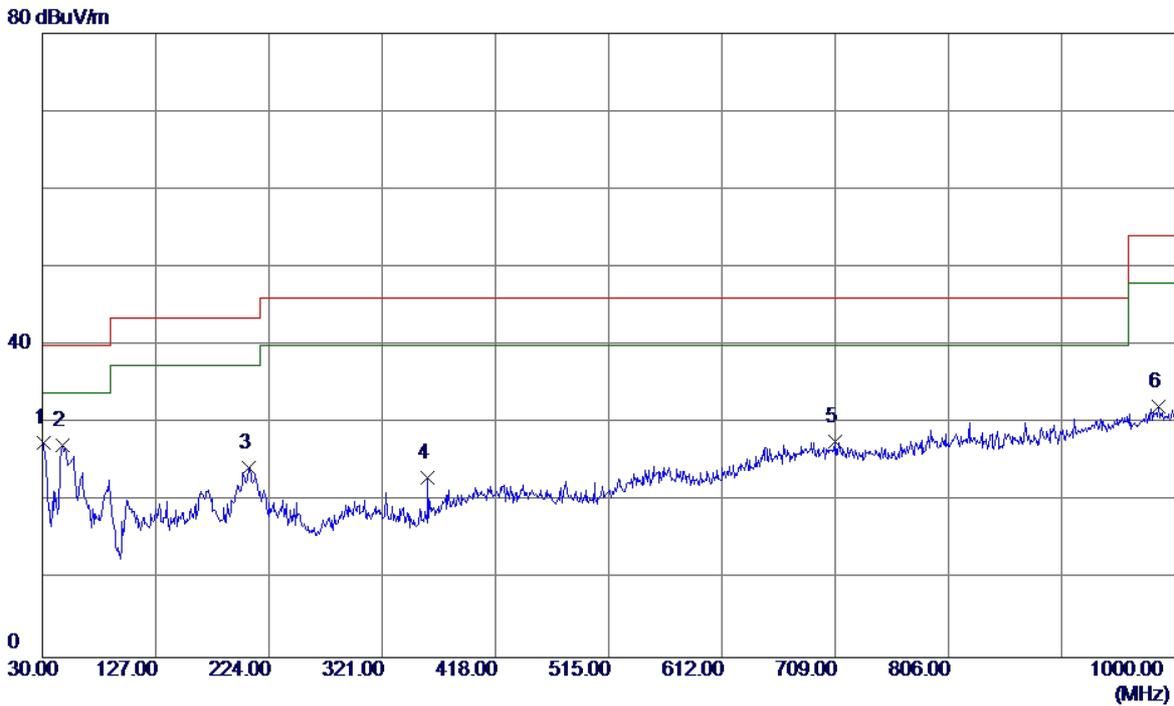


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9700	40.50	-12.99	27.51	40.00	-12.49	QP
2	46.9750	39.51	-12.25	27.26	40.00	-12.74	QP
3	206.5399	38.20	-13.94	24.26	43.50	-19.24	QP
4	359.8000	33.12	-10.07	23.05	46.00	-22.95	QP
5	709.4850	28.37	-0.69	27.68	46.00	-18.32	QP
6	985.9350	28.41	3.73	32.14	54.00	-21.86	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

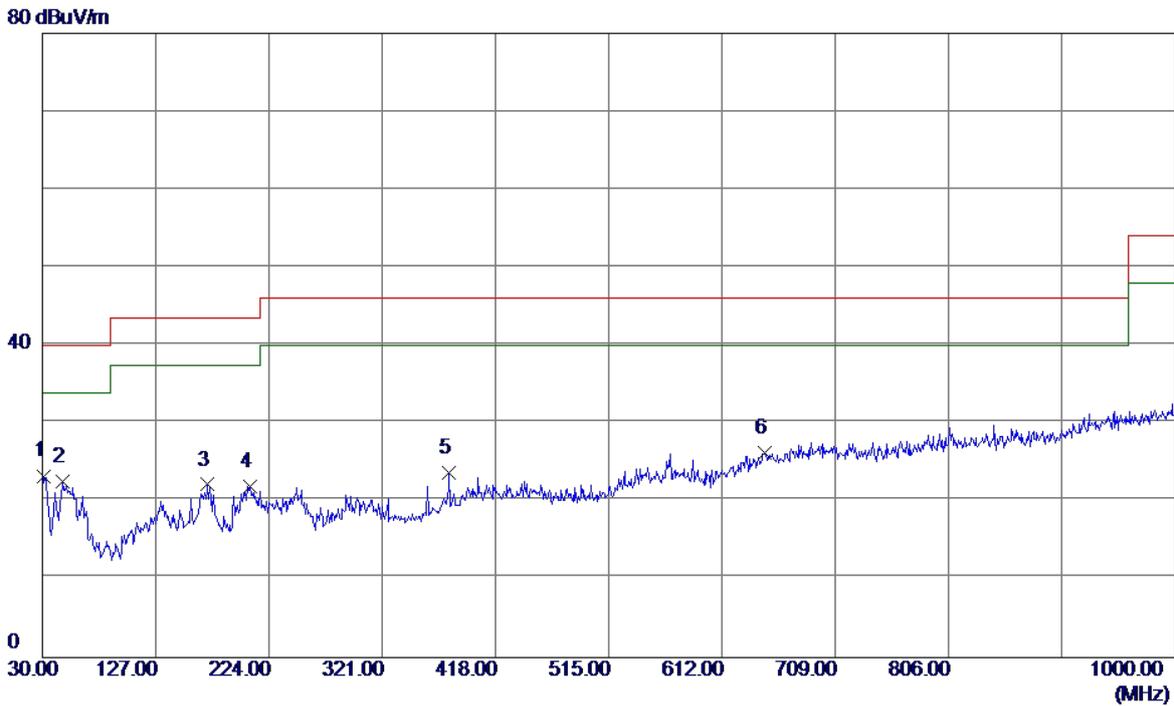

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9700	36.27	-12.99	23.28	40.00	-16.72	QP
2	47.4600	34.85	-12.35	22.50	40.00	-17.50	QP
3	171.6200	33.10	-10.94	22.16	43.50	-21.34	QP
4	207.9950	35.92	-14.01	21.91	43.50	-21.59	QP
5	378.2300	32.39	-8.75	23.64	46.00	-22.36	QP
6	648.3750	28.07	-1.79	26.28	46.00	-19.72	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

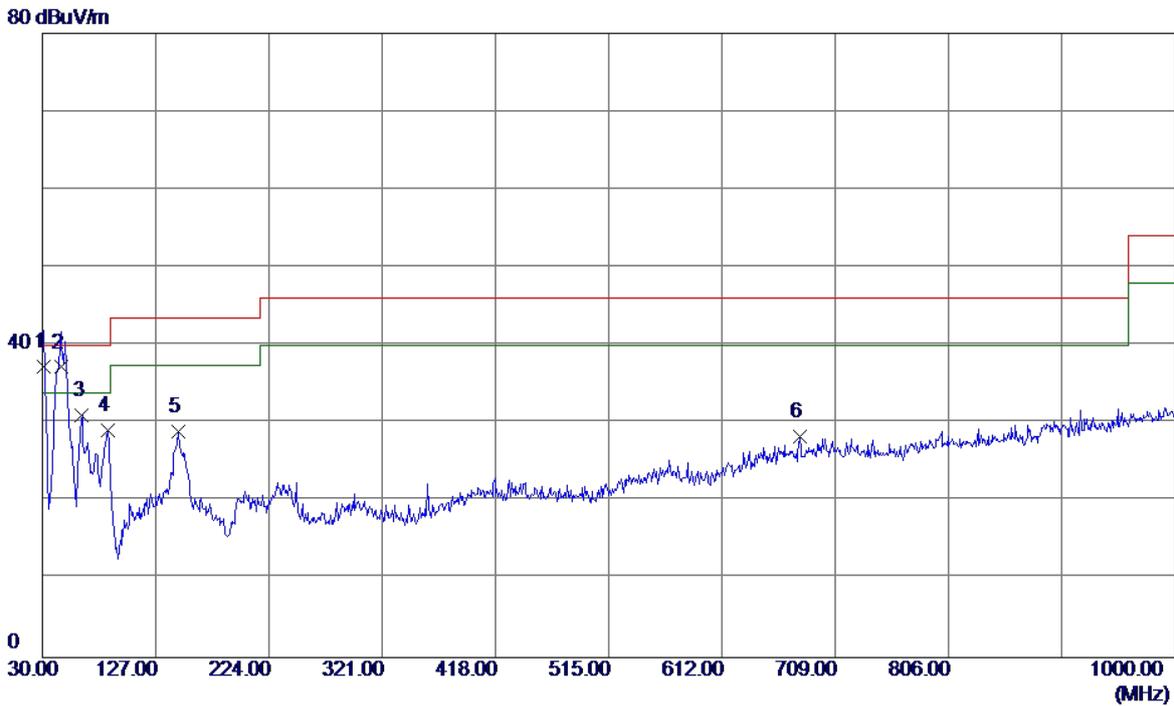

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9700	50.24	-12.99	37.25	40.00	-2.75	QP
2	46.0825	49.28	-12.08	37.20	40.00	-2.80	QP
3	63.9500	44.93	-13.85	31.08	40.00	-8.92	QP
4	85.7750	45.33	-16.26	29.07	40.00	-10.93	QP
5	145.9149	40.93	-11.90	29.03	43.50	-14.47	QP
6	678.4450	29.44	-1.10	28.34	46.00	-17.66	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		


80 dBuV/m

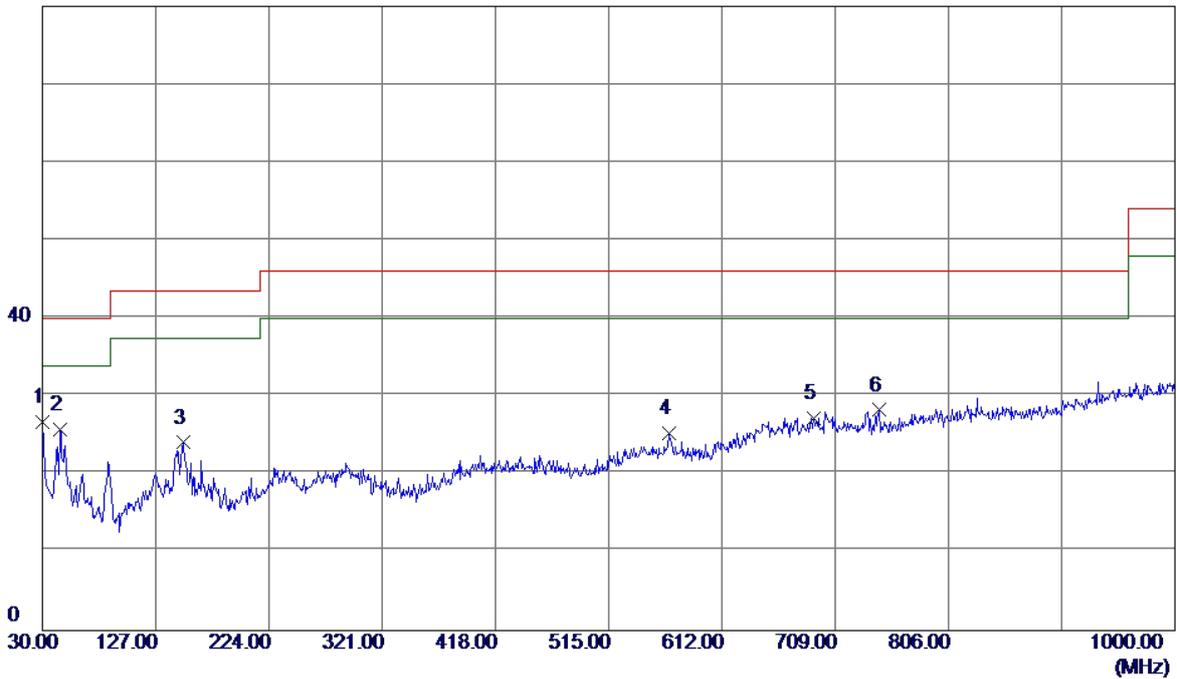

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	39.50	-12.80	26.70	40.00	-13.30	QP
2	45.0350	37.67	-11.88	25.79	40.00	-14.21	QP
3	150.2800	36.01	-11.93	24.08	43.50	-19.42	QP
4	566.8950	29.85	-4.57	25.28	46.00	-20.72	QP
5	691.0550	28.06	-0.84	27.22	46.00	-18.78	QP
6	746.3449	29.09	-0.85	28.24	46.00	-17.76	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		


80 dBuV/m

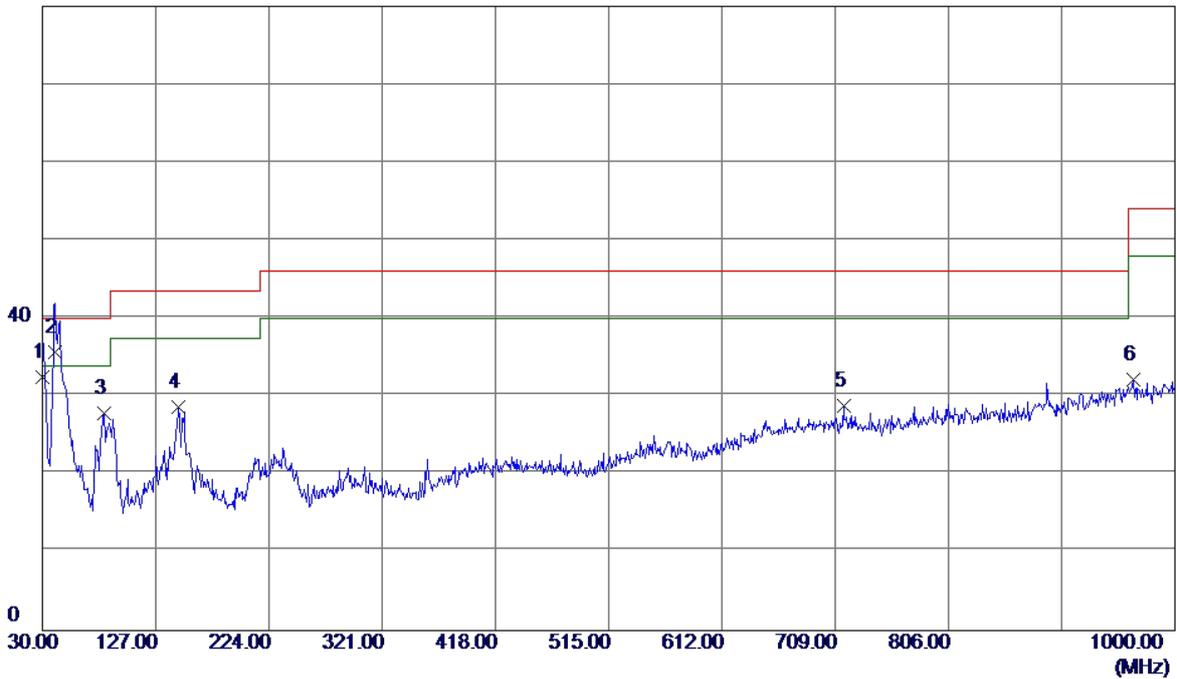

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	45.30	-12.80	32.50	40.00	-7.50	QP
2 *	40.7250	48.02	-12.36	35.66	40.00	-4.34	QP
3	82.3800	44.39	-16.51	27.88	40.00	-12.12	QP
4	146.8850	40.53	-11.90	28.63	43.50	-14.87	QP
5	716.2750	29.49	-0.72	28.77	46.00	-17.23	QP
6	964.5950	28.67	3.42	32.09	54.00	-21.91	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

80 dBuV/m

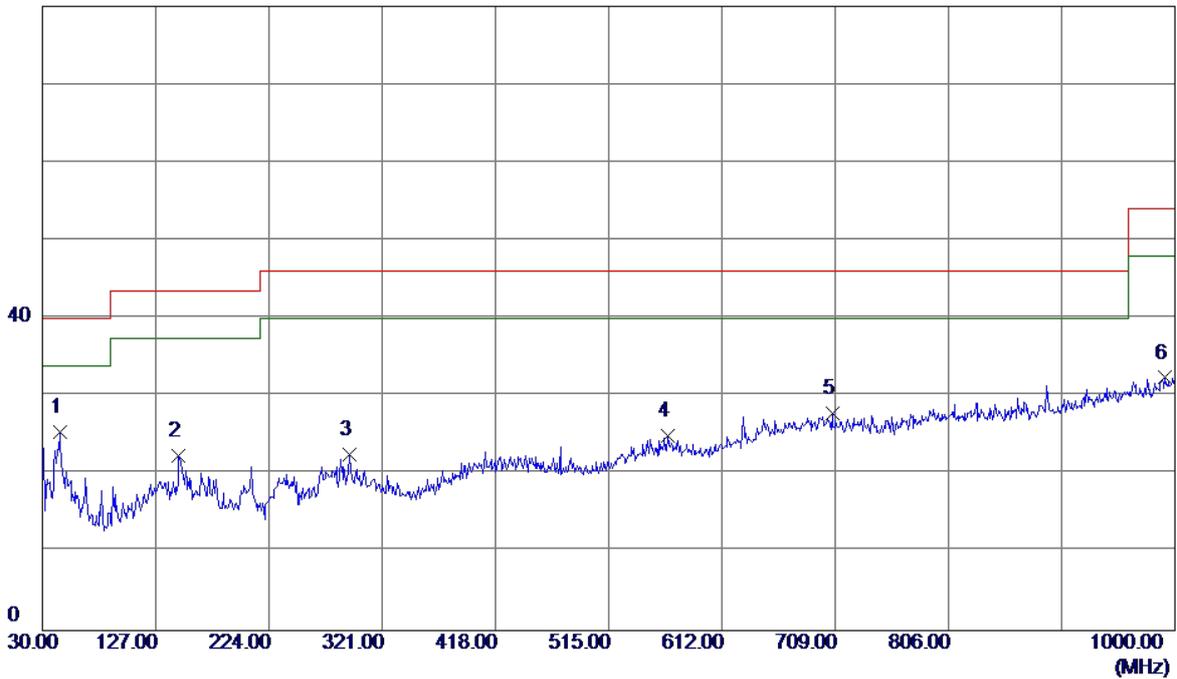


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	45.0350	37.33	-11.88	25.45	40.00	-14.55	QP
2	146.8850	34.35	-11.90	22.45	43.50	-21.05	QP
3	292.8700	32.49	-9.97	22.52	46.00	-23.48	QP
4	565.9250	29.46	-4.56	24.90	46.00	-21.10	QP
5	706.5750	28.48	-0.68	27.80	46.00	-18.20	QP
6	991.2700	28.60	3.80	32.40	54.00	-21.60	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

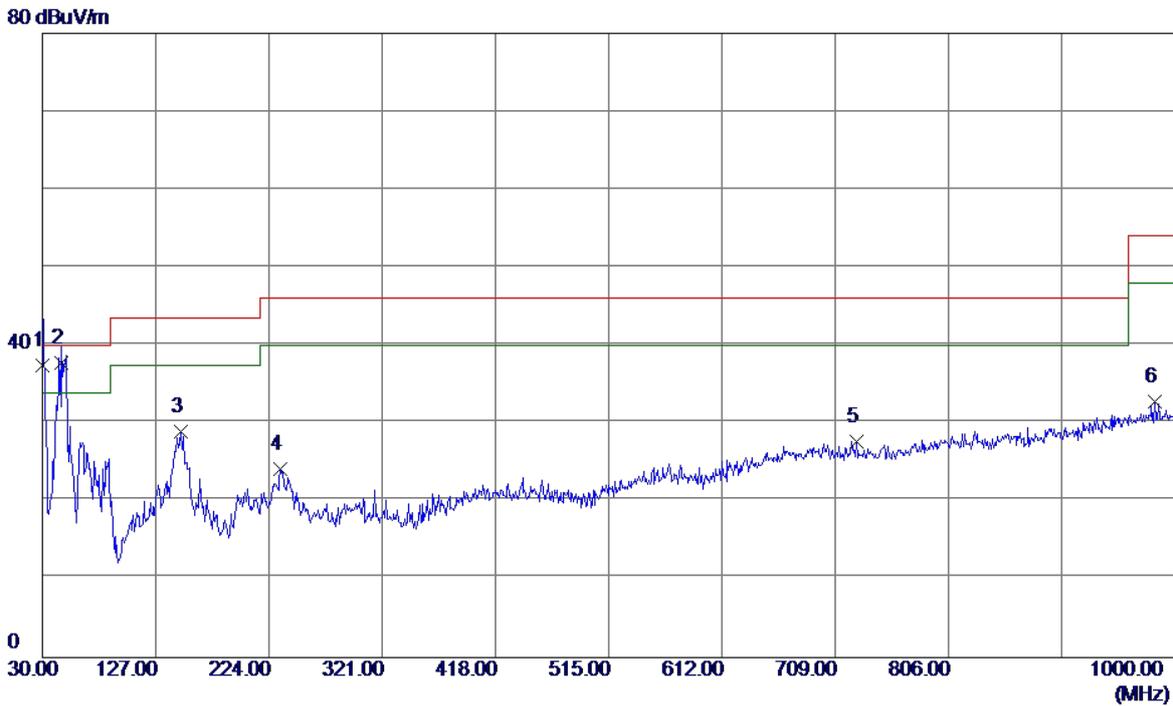


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	30.0000	50.20	-12.80	37.40	40.00	-2.60	QP
2 *	46.4900	49.99	-12.16	37.83	40.00	-2.17	QP
3	148.8250	40.88	-11.91	28.97	43.50	-14.53	QP
4	234.1850	37.33	-13.11	24.22	46.00	-21.78	QP
5	726.9450	28.52	-0.77	27.75	46.00	-18.25	QP
6	982.5400	29.19	3.68	32.87	54.00	-21.13	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

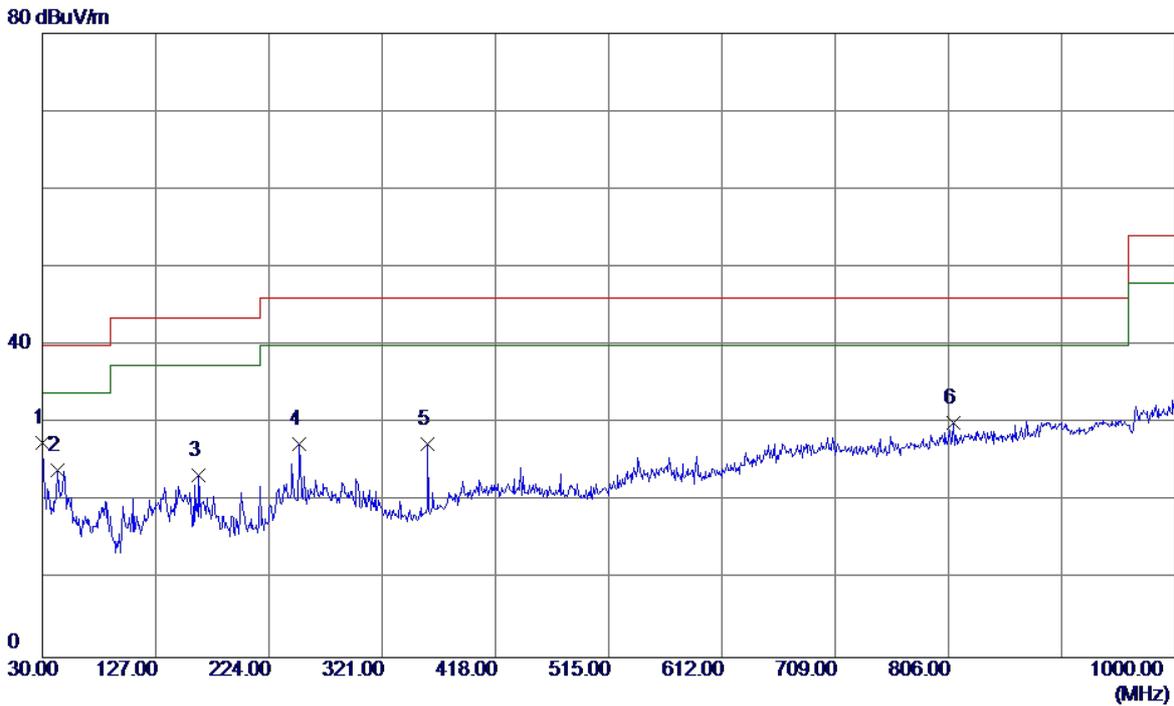


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	40.26	-12.80	27.46	40.00	-12.54	QP
2	43.0950	35.90	-11.87	24.03	40.00	-15.97	QP
3	163.8600	35.14	-11.84	23.30	43.50	-20.20	QP
4	250.1900	40.75	-13.33	27.42	46.00	-18.58	QP
5	359.8000	37.50	-10.07	27.43	46.00	-18.57	QP
6	810.3650	29.54	0.61	30.15	46.00	-15.85	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

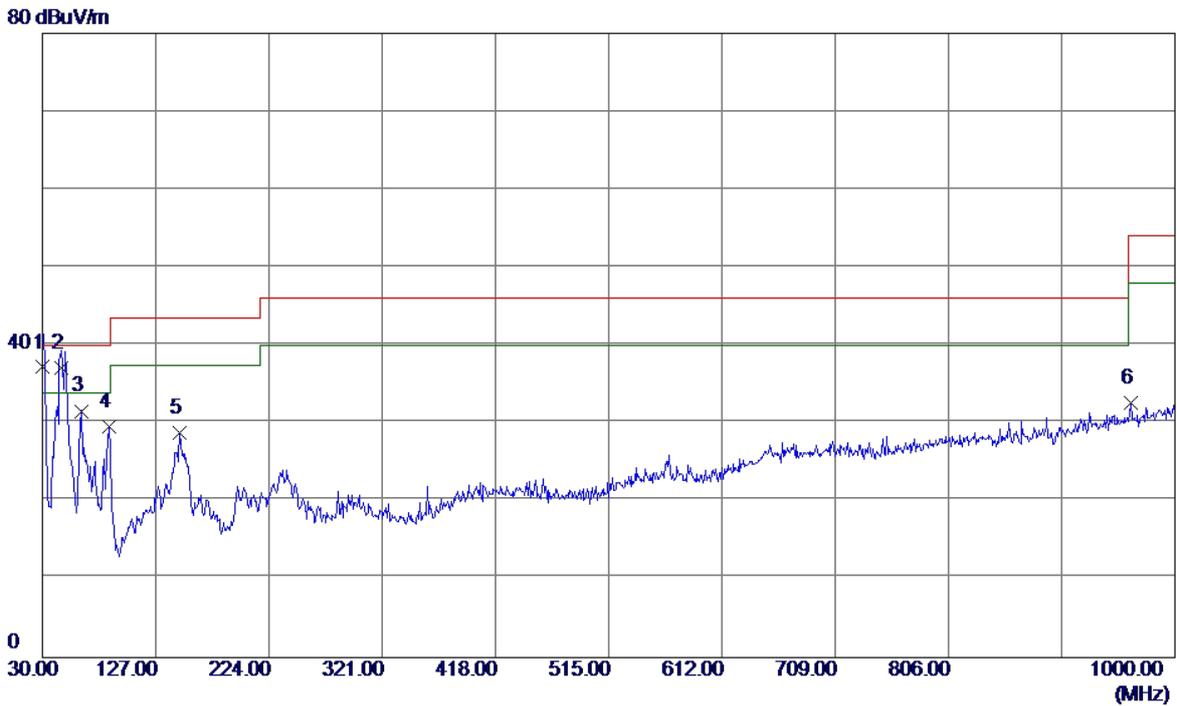


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	50.00	-12.80	37.20	40.00	-2.80	QP
2	46.0050	49.20	-12.07	37.13	40.00	-2.87	QP
3	62.9800	45.55	-13.95	31.60	40.00	-8.40	QP
4	87.2300	45.97	-16.31	29.66	40.00	-10.34	QP
5	147.3700	40.68	-11.91	28.77	43.50	-14.73	QP
6	962.6550	29.21	3.39	32.60	54.00	-21.40	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

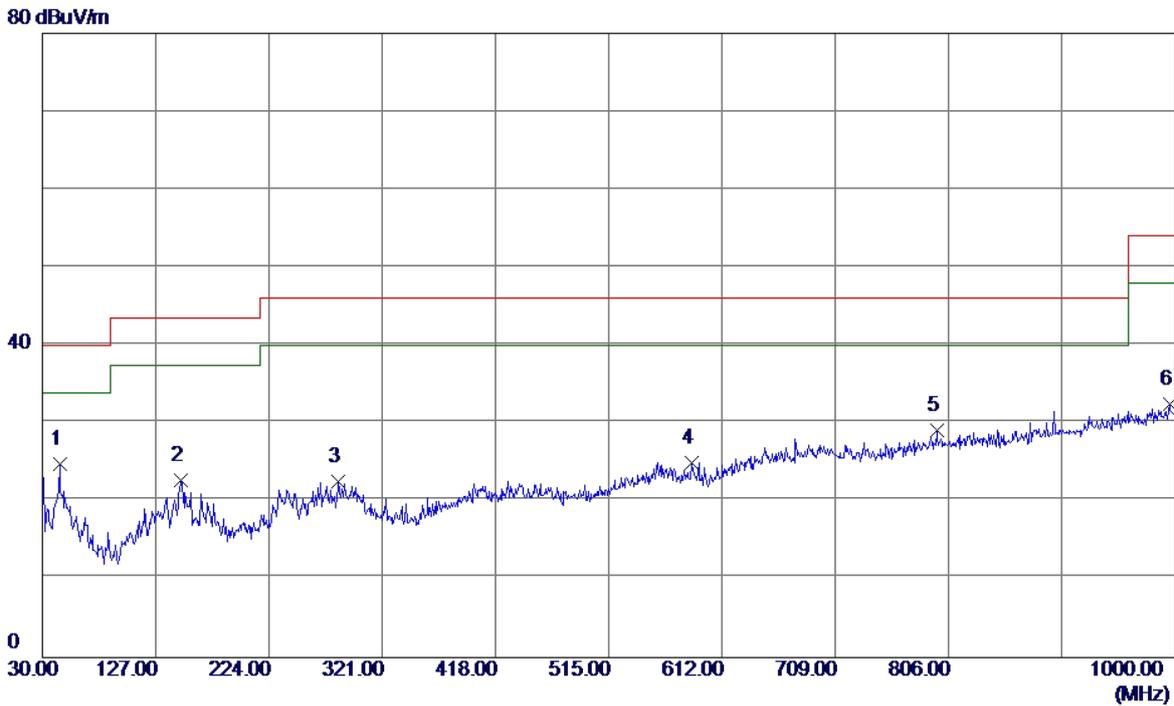

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	45.0350	36.75	-11.88	24.87	40.00	-15.13	QP
2	148.8250	34.64	-11.91	22.73	43.50	-20.77	QP
3	283.6550	33.65	-11.08	22.57	46.00	-23.43	QP
4	585.8100	29.72	-4.72	25.00	46.00	-21.00	QP
5	795.8150	28.64	0.49	29.13	46.00	-16.87	QP
6	995.6350	28.68	3.87	32.55	54.00	-21.45	QP


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

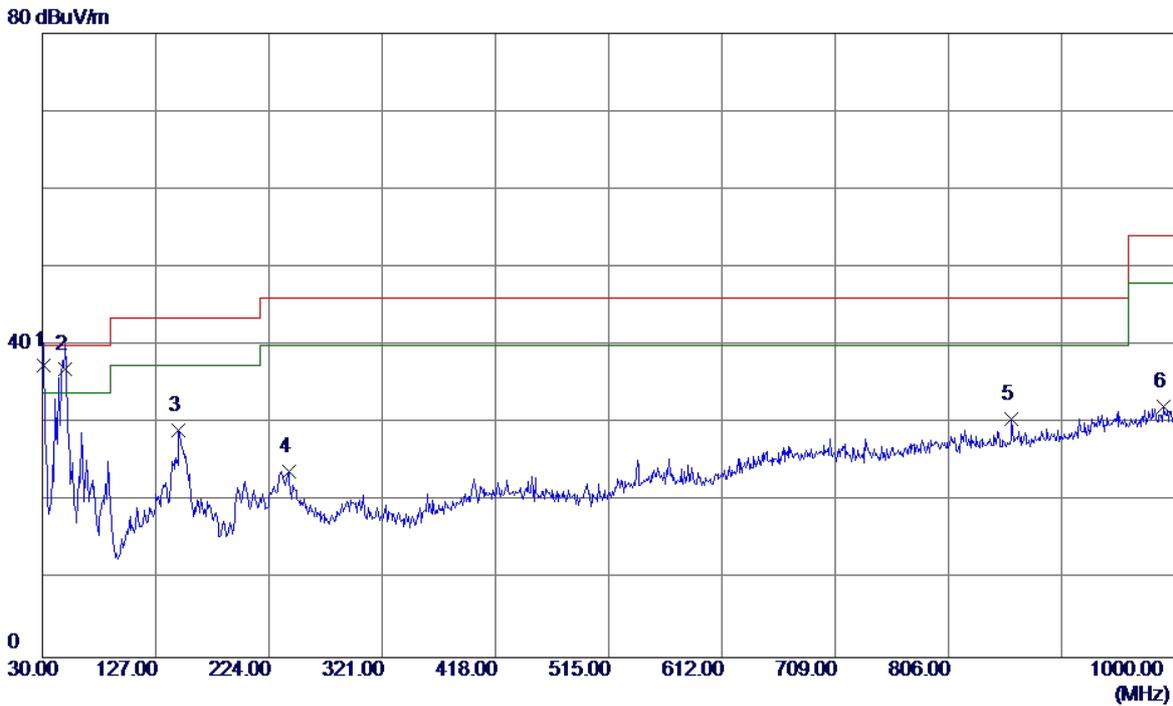

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.9700	50.41	-12.99	37.42	40.00	-2.58	QP
2	49.8849	49.00	-12.05	36.95	40.00	-3.05	QP
3	146.8850	41.00	-11.90	29.10	43.50	-14.40	QP
4	240.9750	37.28	-13.38	23.90	46.00	-22.10	QP
5	860.3200	29.80	0.82	30.62	46.00	-15.38	QP
6	989.8150	28.31	3.78	32.09	54.00	-21.91	QP

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 27, 2016		

80 dBuV/m

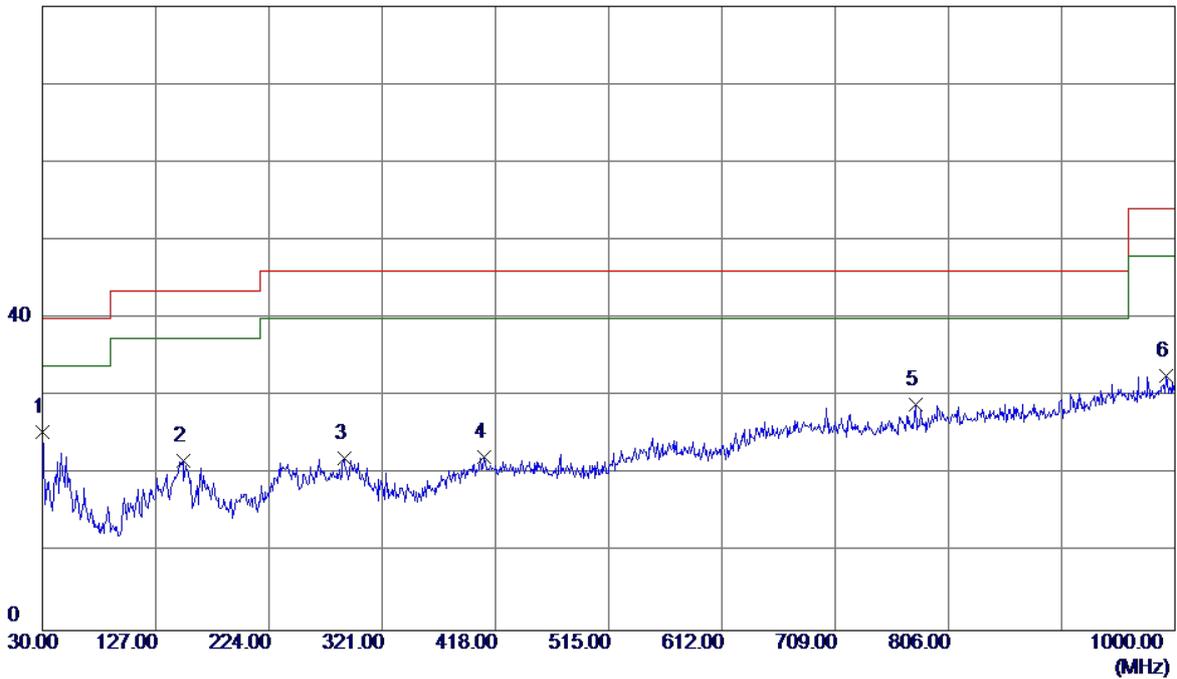


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1 *	30.0000	38.27	-12.80	25.47	40.00	-14.53	QP
2	150.2800	33.62	-11.93	21.69	43.50	-21.81	QP
3	288.5050	32.37	-10.24	22.13	46.00	-23.87	QP
4	408.3000	29.37	-7.18	22.19	46.00	-23.81	QP
5	777.8700	28.93	-0.04	28.89	46.00	-17.11	QP
6	992.7250	28.75	3.82	32.57	54.00	-21.43	QP

4.2.8 TEST RESULTS-ABOVE 1GHZ

Remark:


- (1) All readings are Peak unless otherwise stated QP in column of 『Note 』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (3) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

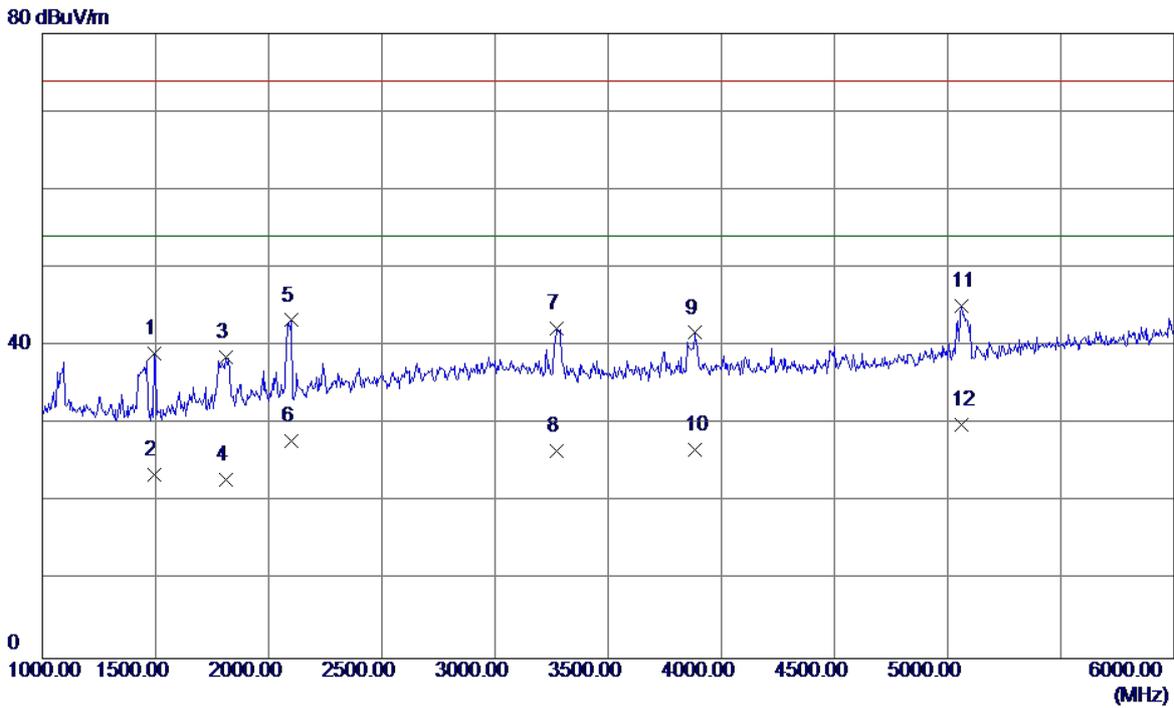


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	45.64	-6.66	38.98	74.00	-35.02	Peak
2	1495.0000	30.19	-6.66	23.53	54.00	-30.47	AVG
3	1810.0000	42.85	-4.28	38.57	74.00	-35.43	Peak
4	1810.0000	27.15	-4.28	22.87	54.00	-31.13	AVG
5	2100.0000	45.73	-2.45	43.28	74.00	-30.72	Peak
6	2100.0000	30.32	-2.45	27.87	54.00	-26.13	AVG
7	3270.0000	40.89	1.41	42.30	74.00	-31.70	Peak
8	3270.0000	25.20	1.41	26.61	54.00	-27.39	AVG
9	3885.0000	39.11	2.57	41.68	74.00	-32.32	Peak
10	3885.0000	24.10	2.57	26.67	54.00	-27.33	AVG
11	5060.0000	39.38	5.80	45.18	74.00	-28.82	Peak
12 *	5060.0000	24.09	5.80	29.89	54.00	-24.11	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:FOXCONN		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

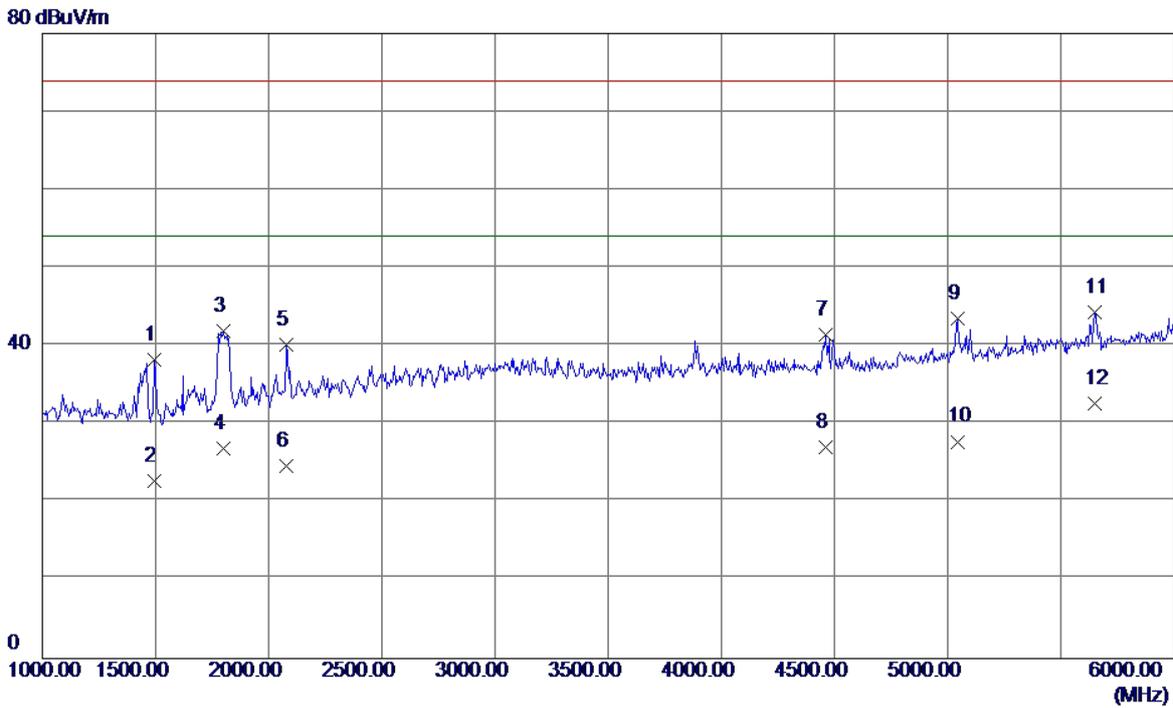


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	44.90	-6.66	38.24	74.00	-35.76	Peak
2	1495.0000	29.35	-6.66	22.69	54.00	-31.31	AVG
3	1800.0000	46.28	-4.35	41.93	74.00	-32.07	Peak
4	1800.0000	31.20	-4.35	26.85	54.00	-27.15	AVG
5	2080.0000	42.63	-2.52	40.11	74.00	-33.89	Peak
6	2080.0000	27.20	-2.52	24.68	54.00	-29.32	AVG
7	4460.0000	38.05	3.44	41.49	74.00	-32.51	Peak
8	4460.0000	23.63	3.44	27.07	54.00	-26.93	AVG
9	5045.0000	37.71	5.75	43.46	74.00	-30.54	Peak
10	5045.0000	22.01	5.75	27.76	54.00	-26.24	AVG
11	5650.0000	36.62	7.76	44.38	74.00	-29.62	Peak
12 *	5650.0000	24.81	7.76	32.57	54.00	-21.43	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

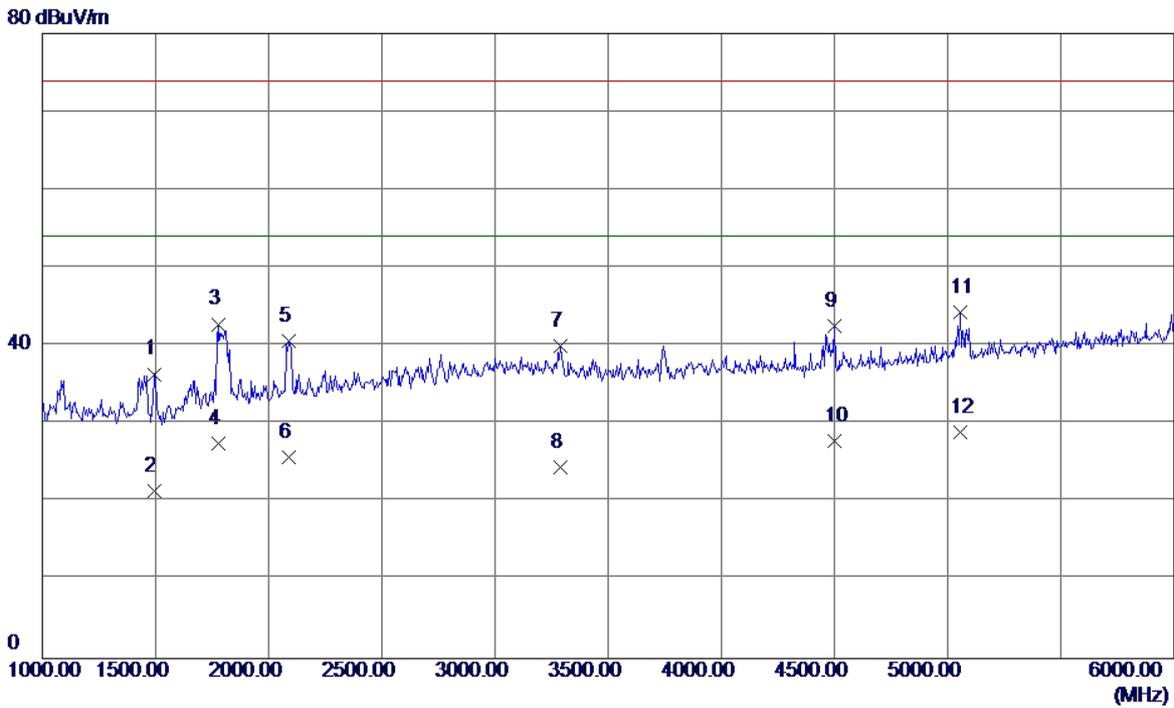


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	43.06	-6.66	36.40	74.00	-37.60	Peak
2	1495.0000	28.09	-6.66	21.43	54.00	-32.57	AVG
3	1780.0000	47.31	-4.51	42.80	74.00	-31.20	Peak
4	1780.0000	32.02	-4.51	27.51	54.00	-26.49	AVG
5	2090.0000	43.18	-2.49	40.69	74.00	-33.31	Peak
6	2090.0000	28.31	-2.49	25.82	54.00	-28.18	AVG
7	3290.0000	38.64	1.41	40.05	74.00	-33.95	Peak
8	3290.0000	23.10	1.41	24.51	54.00	-29.49	AVG
9	4500.0000	39.04	3.48	42.52	74.00	-31.48	Peak
10	4500.0000	24.30	3.48	27.78	54.00	-26.22	AVG
11	5055.0000	38.57	5.78	44.35	74.00	-29.65	Peak
12 *	5055.0000	23.16	5.78	28.94	54.00	-25.06	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:Luxshare		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

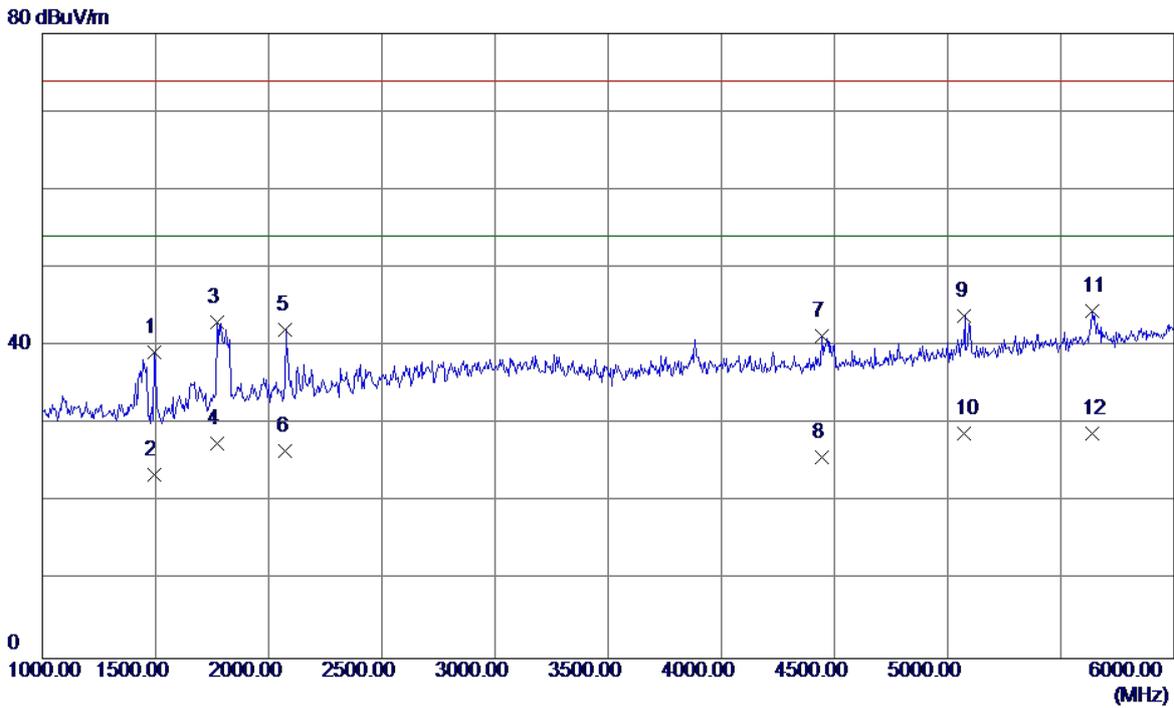


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	45.79	-6.66	39.13	74.00	-34.87	Peak
2	1495.0000	30.25	-6.66	23.59	54.00	-30.41	AVG
3	1770.0000	47.57	-4.58	42.99	74.00	-31.01	Peak
4	1770.0000	32.10	-4.58	27.52	54.00	-26.48	AVG
5	2075.0000	44.69	-2.54	42.15	74.00	-31.85	Peak
6	2075.0000	29.09	-2.54	26.55	54.00	-27.45	AVG
7	4445.0000	37.86	3.42	41.28	74.00	-32.72	Peak
8	4445.0000	22.36	3.42	25.78	54.00	-28.22	AVG
9	5075.0000	38.06	5.84	43.90	74.00	-30.10	Peak
10 *	5075.0000	23.02	5.84	28.86	54.00	-25.14	AVG
11	5640.0000	36.77	7.72	44.49	74.00	-29.51	Peak
12	5640.0000	21.10	7.72	28.82	54.00	-25.18	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

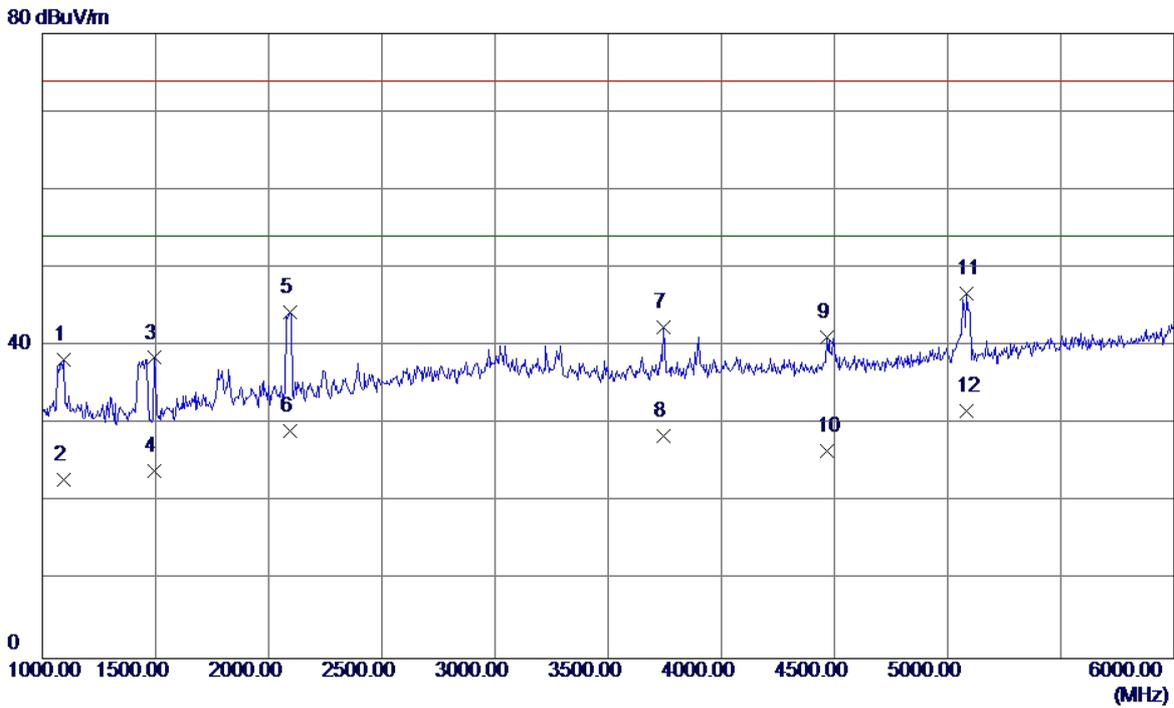


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1095.0000	45.96	-7.69	38.27	74.00	-35.73	Peak
2	1095.0000	30.58	-7.69	22.89	54.00	-31.11	AVG
3	1495.0000	45.14	-6.66	38.48	74.00	-35.52	Peak
4	1495.0000	30.73	-6.66	24.07	54.00	-29.93	AVG
5	2095.0000	46.72	-2.47	44.25	74.00	-29.75	Peak
6	2095.0000	31.55	-2.47	29.08	54.00	-24.92	AVG
7	3745.0000	40.25	2.12	42.37	74.00	-31.63	Peak
8	3745.0000	26.42	2.12	28.54	54.00	-25.46	AVG
9	4465.0000	37.66	3.44	41.10	74.00	-32.90	Peak
10	4465.0000	23.12	3.44	26.56	54.00	-27.44	AVG
11	5085.0000	40.91	5.88	46.79	74.00	-27.21	Peak
12 *	5085.0000	25.84	5.88	31.72	54.00	-22.28	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	USB COPY(EUT with PC)+IDLE		
Note	USB Cable:PANG NGAI		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

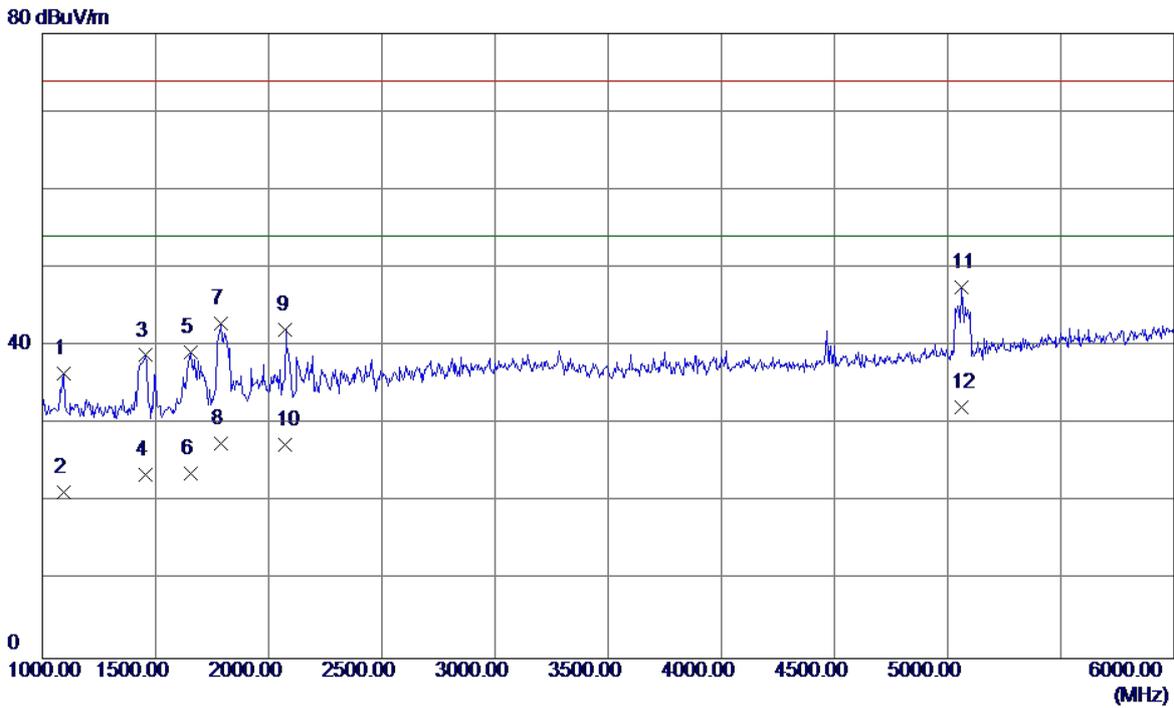


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1095.0000	44.17	-7.69	36.48	74.00	-37.52	Peak
2	1095.0000	29.02	-7.69	21.33	54.00	-32.67	AVG
3	1455.0000	45.57	-6.77	38.80	74.00	-35.20	Peak
4	1455.0000	30.36	-6.77	23.59	54.00	-30.41	AVG
5	1655.0000	44.59	-5.46	39.13	74.00	-34.87	Peak
6	1655.0000	29.15	-5.46	23.69	54.00	-30.31	AVG
7	1790.0000	47.29	-4.43	42.86	74.00	-31.14	Peak
8	1790.0000	32.02	-4.43	27.59	54.00	-26.41	AVG
9	2075.0000	44.58	-2.54	42.04	74.00	-31.96	Peak
10	2075.0000	29.86	-2.54	27.32	54.00	-26.68	AVG
11	5060.0000	41.78	5.80	47.58	74.00	-26.42	Peak
12 *	5060.0000	26.31	5.80	32.11	54.00	-21.89	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FOXCONN+Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

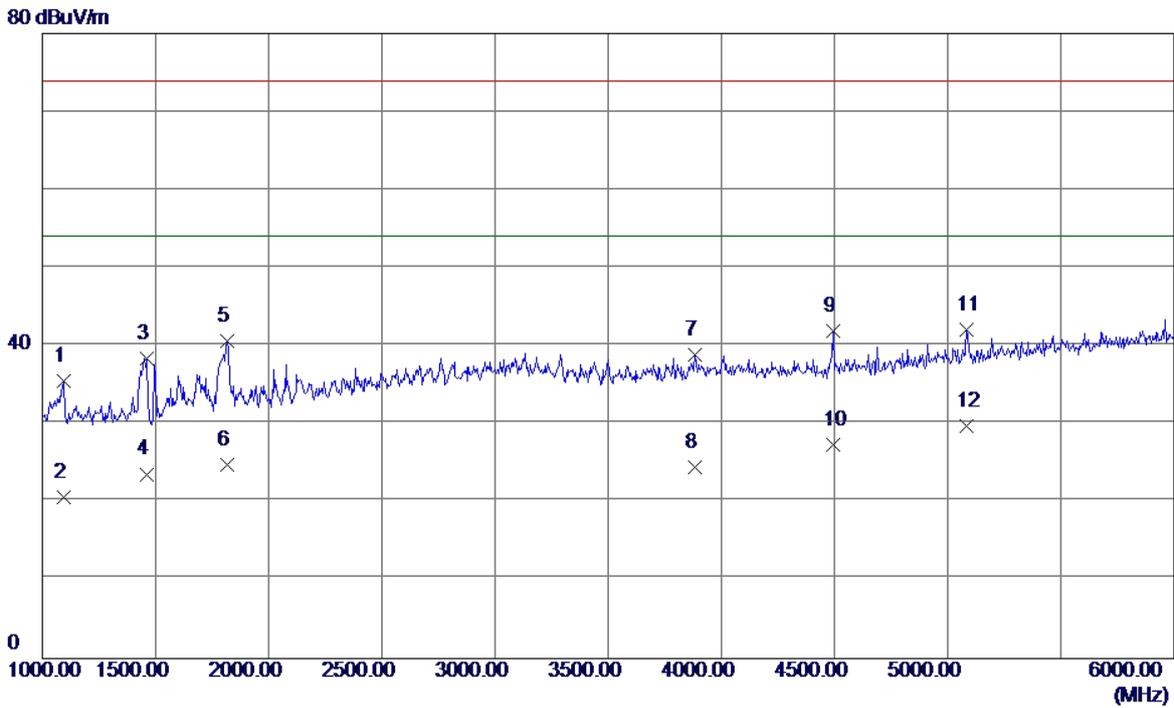


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1095.0000	43.21	-7.69	35.52	74.00	-38.48	Peak
2	1095.0000	28.33	-7.69	20.64	54.00	-33.36	AVG
3	1460.0000	45.15	-6.75	38.40	74.00	-35.60	Peak
4	1460.0000	30.35	-6.75	23.60	54.00	-30.40	AVG
5	1815.0000	44.93	-4.24	40.69	74.00	-33.31	Peak
6	1815.0000	29.10	-4.24	24.86	54.00	-29.14	AVG
7	3885.0000	36.28	2.57	38.85	74.00	-35.15	Peak
8	3885.0000	21.90	2.57	24.47	54.00	-29.53	AVG
9	4495.0000	38.43	3.47	41.90	74.00	-32.10	Peak
10	4495.0000	23.96	3.47	27.43	54.00	-26.57	AVG
11	5085.0000	36.23	5.88	42.11	74.00	-31.89	Peak
12 *	5085.0000	23.91	5.88	29.79	54.00	-24.21	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:BYD+USB Cable:FOXCONN+Battery:SCUD		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

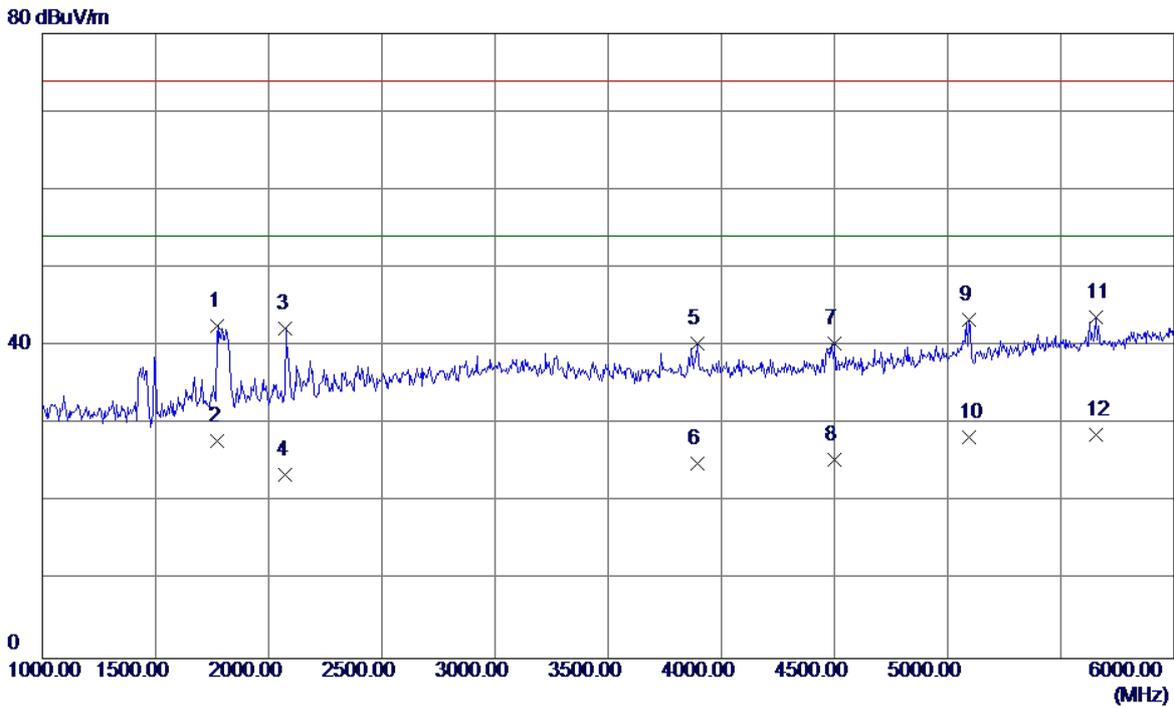


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1775.0000	47.04	-4.54	42.50	74.00	-31.50	Peak
2	1775.0000	32.36	-4.54	27.82	54.00	-26.18	AVG
3	2075.0000	44.71	-2.54	42.17	74.00	-31.83	Peak
4	2075.0000	26.09	-2.54	23.55	54.00	-30.45	AVG
5	3895.0000	37.64	2.61	40.25	74.00	-33.75	Peak
6	3895.0000	22.39	2.61	25.00	54.00	-29.00	AVG
7	4500.0000	36.87	3.48	40.35	74.00	-33.65	Peak
8	4500.0000	21.98	3.48	25.46	54.00	-28.54	AVG
9	5095.0000	37.40	5.91	43.31	74.00	-30.69	Peak
10	5095.0000	22.46	5.91	28.37	54.00	-25.63	AVG
11	5655.0000	35.88	7.78	43.66	74.00	-30.34	Peak
12 *	5655.0000	20.89	7.78	28.67	54.00	-25.33	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

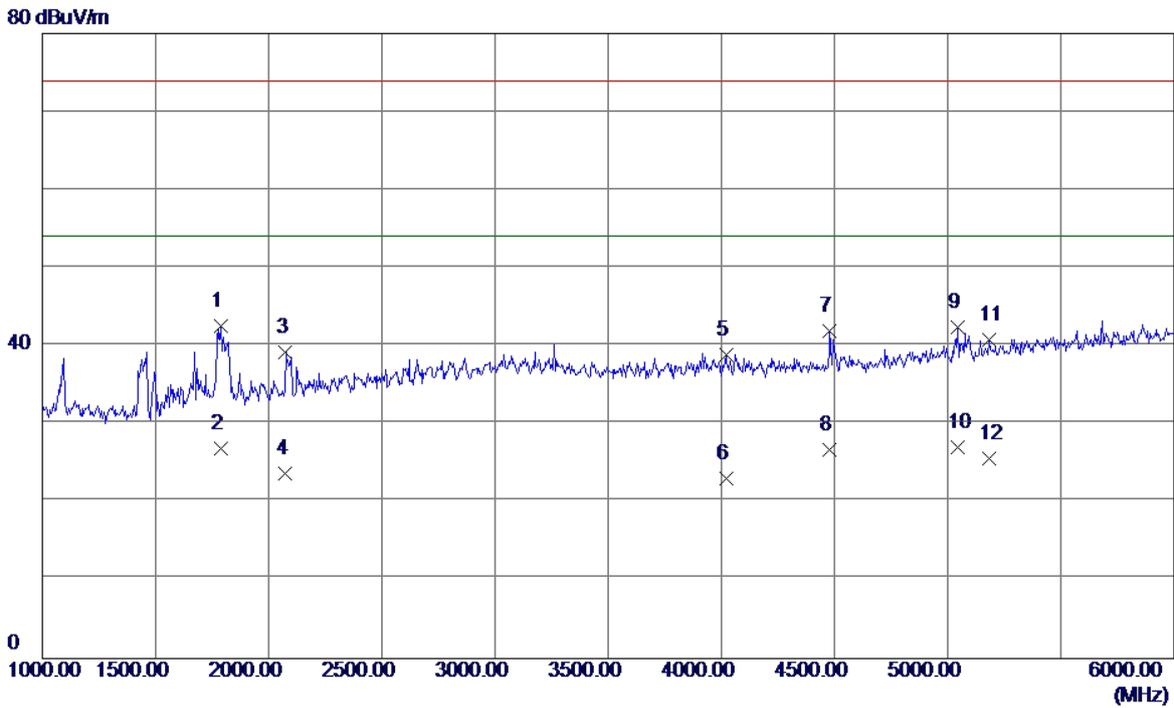


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1790.0000	46.92	-4.43	42.49	74.00	-31.51	Peak
2	1790.0000	31.27	-4.43	26.84	54.00	-27.16	AVG
3	2075.0000	41.76	-2.54	39.22	74.00	-34.78	Peak
4	2075.0000	26.29	-2.54	23.75	54.00	-30.25	AVG
5	4020.0000	35.94	2.97	38.91	74.00	-35.09	Peak
6	4020.0000	20.13	2.97	23.10	54.00	-30.90	AVG
7	4480.0000	38.40	3.46	41.86	74.00	-32.14	Peak
8	4480.0000	23.32	3.46	26.78	54.00	-27.22	AVG
9	5045.0000	36.72	5.75	42.47	74.00	-31.53	Peak
10 *	5045.0000	21.30	5.75	27.05	54.00	-26.95	AVG
11	5185.0000	34.65	6.20	40.85	74.00	-33.15	Peak
12	5185.0000	19.36	6.20	25.56	54.00	-28.44	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

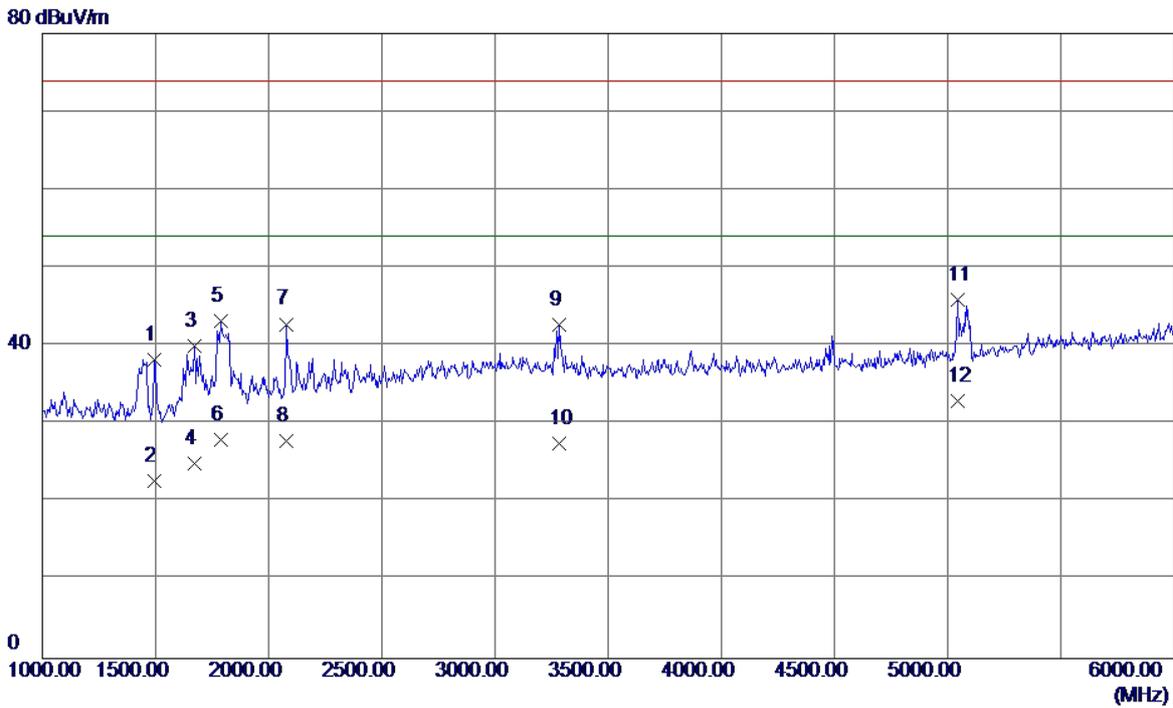


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	44.93	-6.66	38.27	74.00	-35.73	Peak
2	1495.0000	29.35	-6.66	22.69	54.00	-31.31	AVG
3	1670.0000	45.33	-5.35	39.98	74.00	-34.02	Peak
4	1670.0000	30.33	-5.35	24.98	54.00	-29.02	AVG
5	1790.0000	47.65	-4.43	43.22	74.00	-30.78	Peak
6	1790.0000	32.37	-4.43	27.94	54.00	-26.06	AVG
7	2080.0000	45.32	-2.52	42.80	74.00	-31.20	Peak
8	2080.0000	30.32	-2.52	27.80	54.00	-26.20	AVG
9	3285.0000	41.38	1.41	42.79	74.00	-31.21	Peak
10	3285.0000	26.09	1.41	27.50	54.00	-26.50	AVG
11	5045.0000	40.19	5.75	45.94	74.00	-28.06	Peak
12 *	5045.0000	27.18	5.75	32.93	54.00	-21.07	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

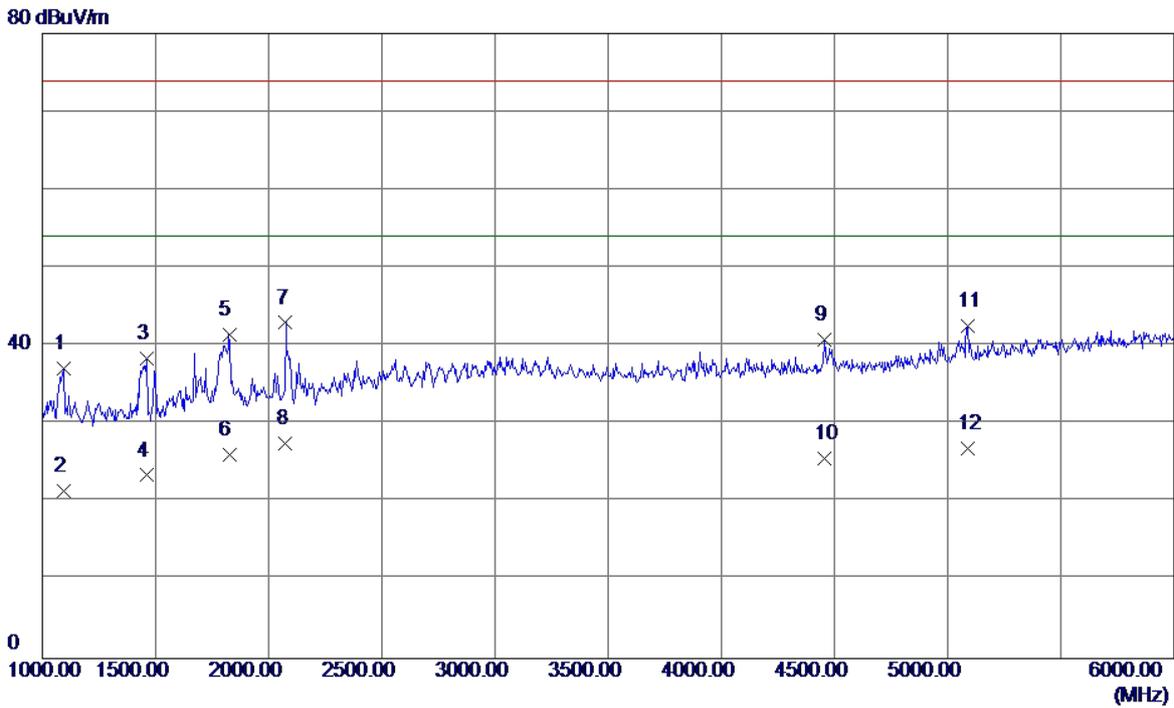

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1095.0000	44.81	-7.69	37.12	74.00	-36.88	Peak
2	1095.0000	29.11	-7.69	21.42	54.00	-32.58	AVG
3	1460.0000	45.19	-6.75	38.44	74.00	-35.56	Peak
4	1460.0000	30.19	-6.75	23.44	54.00	-30.56	AVG
5	1825.0000	45.56	-4.16	41.40	74.00	-32.60	Peak
6	1825.0000	30.31	-4.16	26.15	54.00	-27.85	AVG
7	2075.0000	45.50	-2.54	42.96	74.00	-31.04	Peak
8 *	2075.0000	30.09	-2.54	27.55	54.00	-26.45	AVG
9	4455.0000	37.37	3.43	40.80	74.00	-33.20	Peak
10	4455.0000	22.10	3.43	25.53	54.00	-28.47	AVG
11	5090.0000	36.68	5.89	42.57	74.00	-31.43	Peak
12	5090.0000	21.02	5.89	26.91	54.00	-27.09	AVG


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

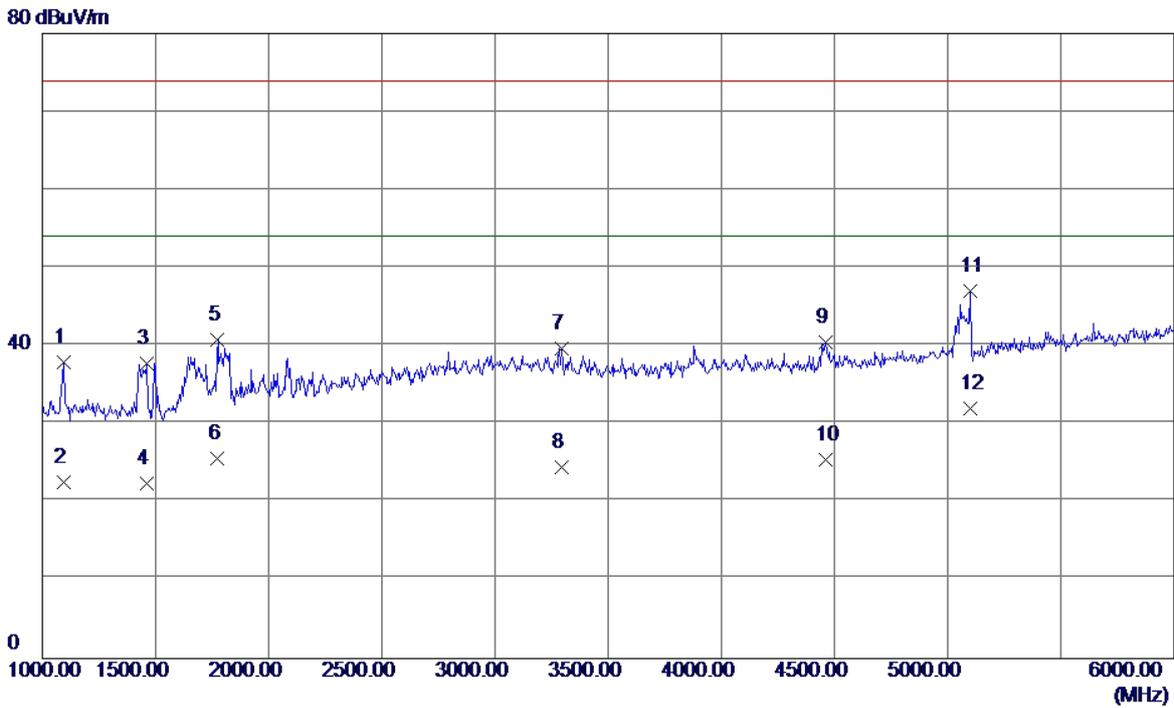

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1095.0000	45.65	-7.69	37.96	74.00	-36.04	Peak
2	1095.0000	30.27	-7.69	22.58	54.00	-31.42	AVG
3	1460.0000	44.50	-6.75	37.75	74.00	-36.25	Peak
4	1460.0000	29.09	-6.75	22.34	54.00	-31.66	AVG
5	1775.0000	45.27	-4.54	40.73	74.00	-33.27	Peak
6	1775.0000	30.20	-4.54	25.66	54.00	-28.34	AVG
7	3295.0000	38.35	1.40	39.75	74.00	-34.25	Peak
8	3295.0000	23.11	1.40	24.51	54.00	-29.49	AVG
9	4460.0000	37.04	3.44	40.48	74.00	-33.52	Peak
10	4460.0000	22.01	3.44	25.45	54.00	-28.55	AVG
11	5100.0000	41.06	5.93	46.99	74.00	-27.01	Peak
12 *	5100.0000	26.10	5.93	32.03	54.00	-21.97	AVG


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

80 dBuV/m

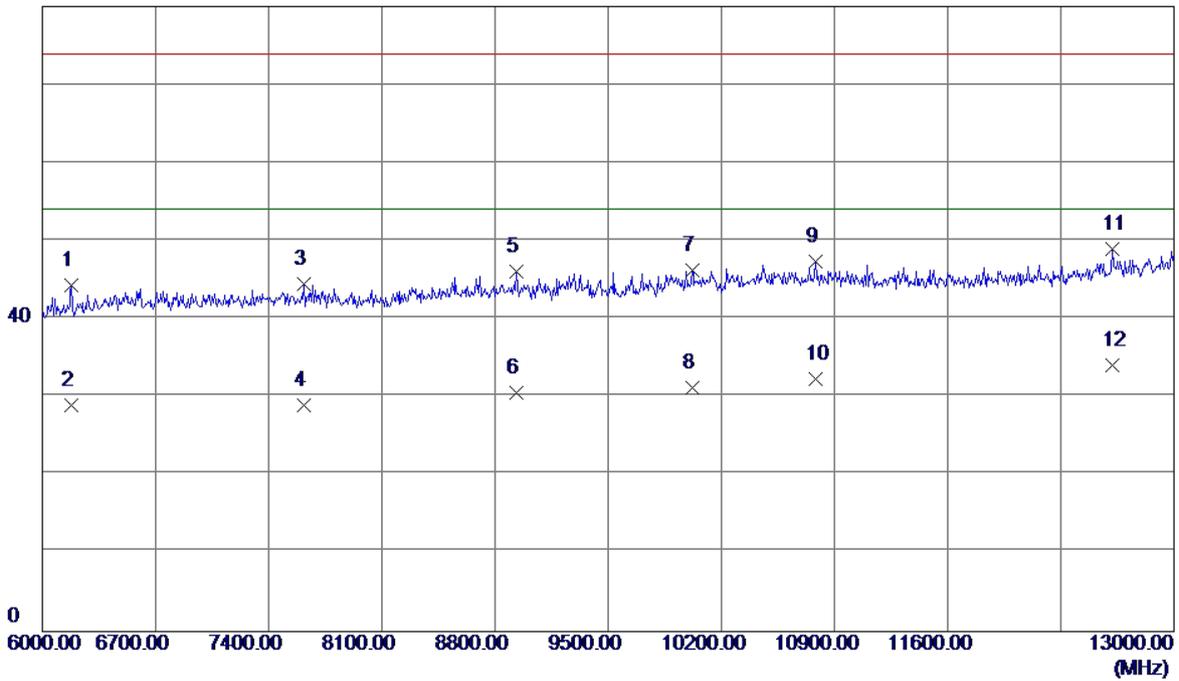


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6182.0000	34.70	9.69	44.39	74.00	-29.61	Peak
2	6182.0000	19.33	9.69	29.02	54.00	-24.98	AVG
3	7617.0000	32.74	11.74	44.48	74.00	-29.52	Peak
4	7617.0000	17.21	11.74	28.95	54.00	-25.05	AVG
5	8933.0000	32.82	13.33	46.15	74.00	-27.85	Peak
6	8933.0000	17.21	13.33	30.54	54.00	-23.46	AVG
7	10018.0000	32.09	14.16	46.25	74.00	-27.75	Peak
8	10018.0000	17.01	14.16	31.17	54.00	-22.83	AVG
9	10781.0000	31.66	15.65	47.31	74.00	-26.69	Peak
10	10781.0000	16.65	15.65	32.30	54.00	-21.70	AVG
11	12622.0000	32.10	16.88	48.98	74.00	-25.02	Peak
12 *	12622.0000	17.20	16.88	34.08	54.00	-19.92	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+2.4GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

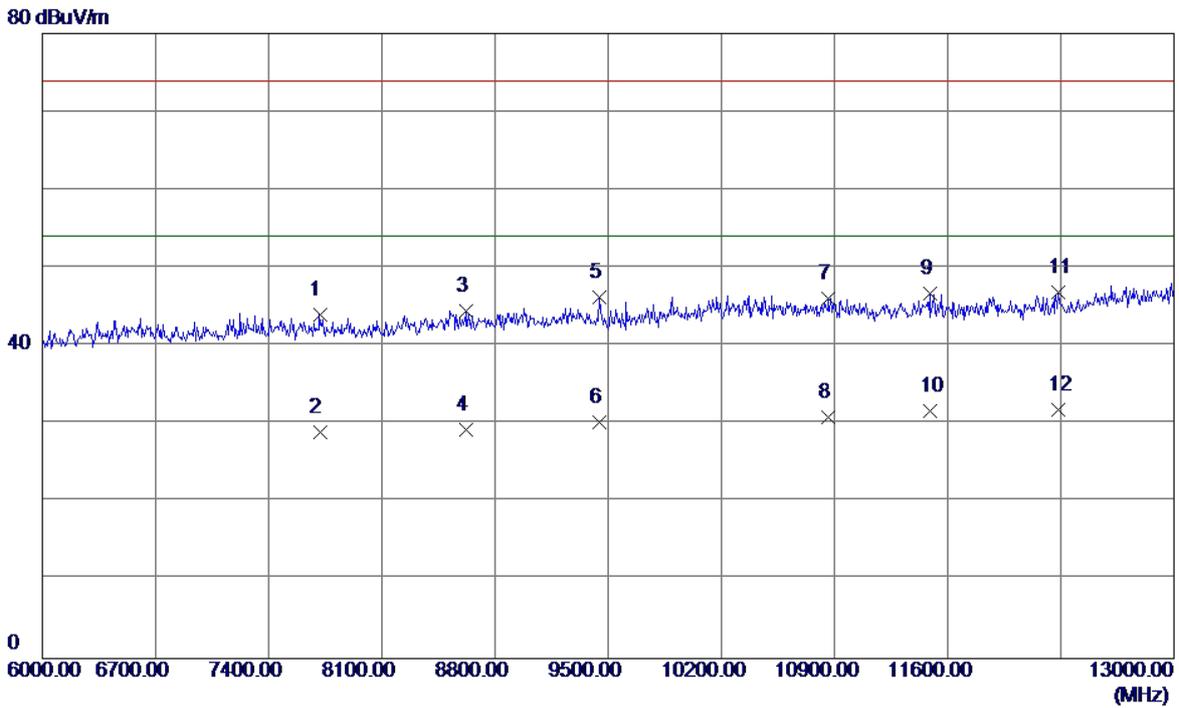


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7715.0000	32.22	11.74	43.96	74.00	-30.04	Peak
2	7715.0000	17.22	11.74	28.96	54.00	-25.04	AVG
3	8625.0000	31.39	13.09	44.48	74.00	-29.52	Peak
4	8625.0000	16.13	13.09	29.22	54.00	-24.78	AVG
5	9444.0000	33.00	13.22	46.22	74.00	-27.78	Peak
6	9444.0000	17.02	13.22	30.24	54.00	-23.76	AVG
7	10865.0000	30.30	15.76	46.06	74.00	-27.94	Peak
8	10865.0000	15.19	15.76	30.95	54.00	-23.05	AVG
9	11488.0000	31.20	15.49	46.69	74.00	-27.31	Peak
10	11488.0000	16.20	15.49	31.69	54.00	-22.31	AVG
11	12286.0000	30.83	16.05	46.88	74.00	-27.12	Peak
12 *	12286.0000	15.80	16.05	31.85	54.00	-22.15	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

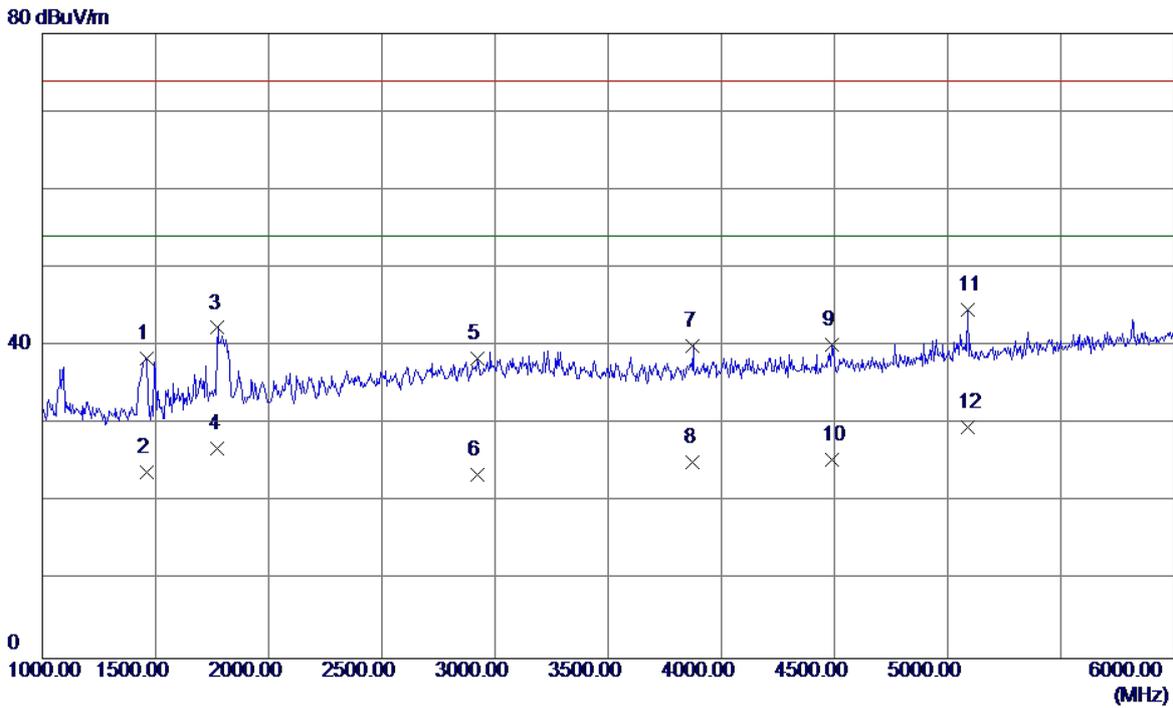


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	45.17	-6.75	38.42	74.00	-35.58	Peak
2	1460.0000	30.62	-6.75	23.87	54.00	-30.13	AVG
3	1775.0000	46.86	-4.54	42.32	74.00	-31.68	Peak
4	1775.0000	31.42	-4.54	26.88	54.00	-27.12	AVG
5	2920.0000	37.30	1.13	38.43	74.00	-35.57	Peak
6	2920.0000	22.36	1.13	23.49	54.00	-30.51	AVG
7	3875.0000	37.44	2.54	39.98	74.00	-34.02	Peak
8	3875.0000	22.54	2.54	25.08	54.00	-28.92	AVG
9	4490.0000	36.63	3.47	40.10	74.00	-33.90	Peak
10	4490.0000	21.96	3.47	25.43	54.00	-28.57	AVG
11	5090.0000	38.72	5.89	44.61	74.00	-29.39	Peak
12 *	5090.0000	23.70	5.89	29.59	54.00	-24.41	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

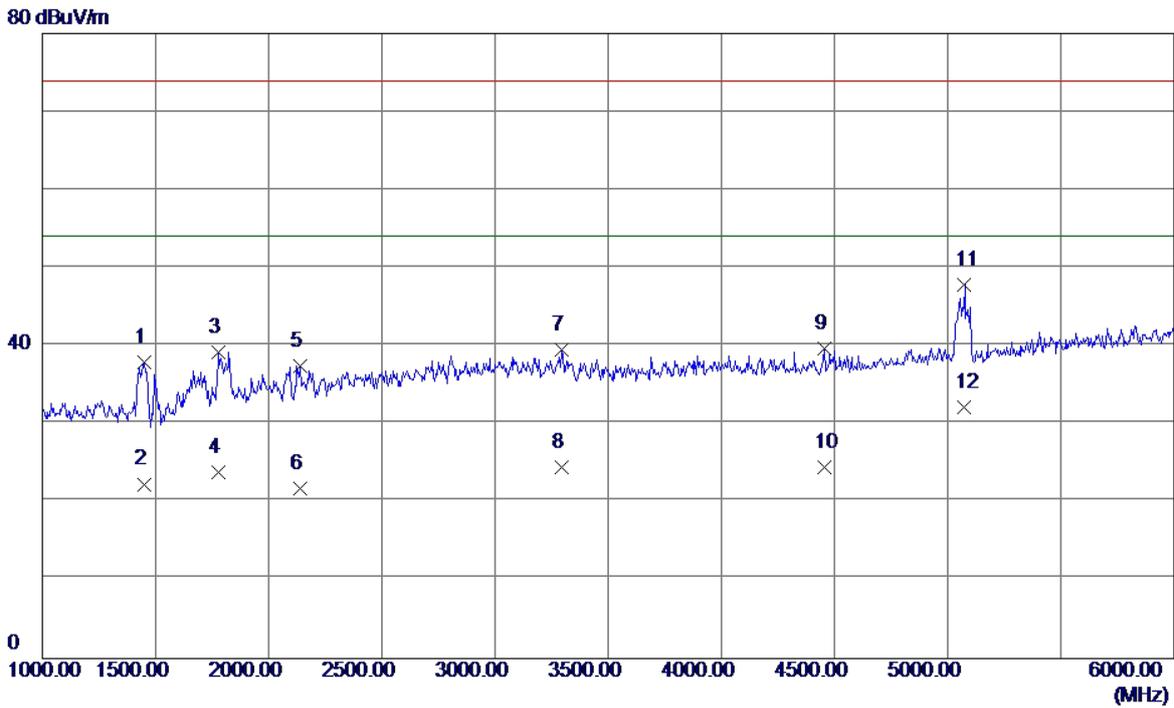


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1450.0000	44.73	-6.78	37.95	74.00	-36.05	Peak
2	1450.0000	29.10	-6.78	22.32	54.00	-31.68	AVG
3	1780.0000	43.76	-4.51	39.25	74.00	-34.75	Peak
4	1780.0000	28.42	-4.51	23.91	54.00	-30.09	AVG
5	2140.0000	39.75	-2.30	37.45	74.00	-36.55	Peak
6	2140.0000	24.10	-2.30	21.80	54.00	-32.20	AVG
7	3295.0000	38.09	1.40	39.49	74.00	-34.51	Peak
8	3295.0000	23.11	1.40	24.51	54.00	-29.49	AVG
9	4455.0000	36.31	3.43	39.74	74.00	-34.26	Peak
10	4455.0000	21.10	3.43	24.53	54.00	-29.47	AVG
11	5075.0000	42.00	5.84	47.84	74.00	-26.16	Peak
12 *	5075.0000	26.33	5.84	32.17	54.00	-21.83	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

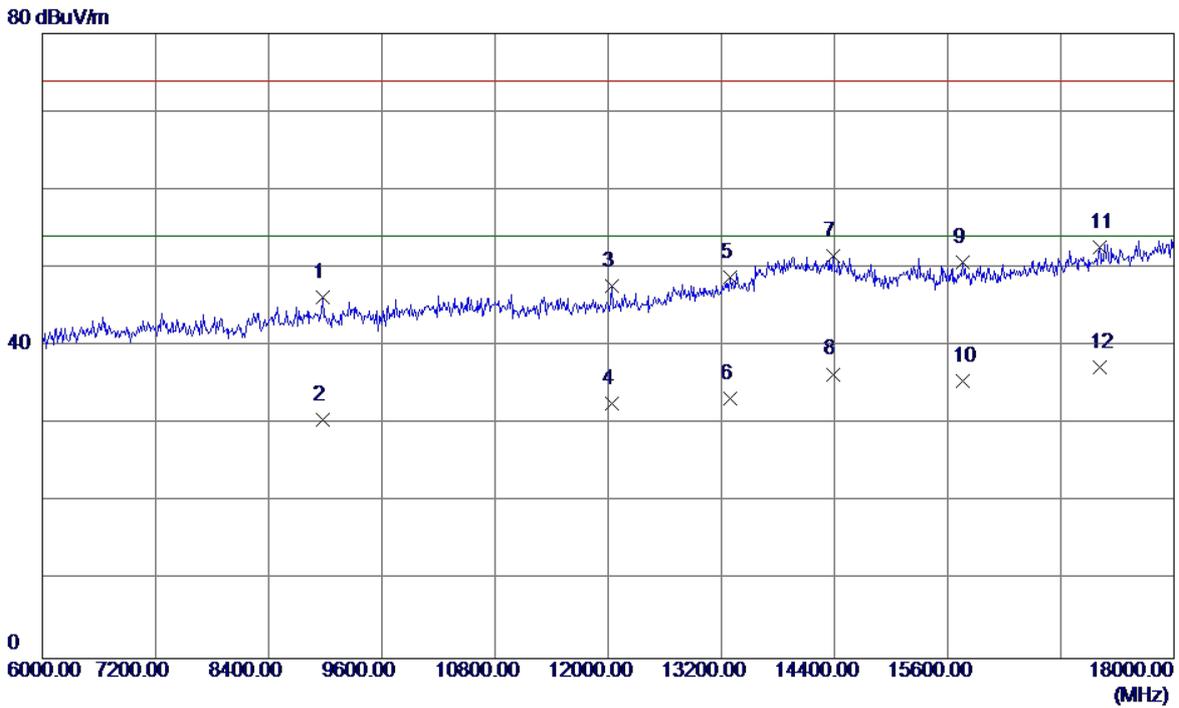

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	8976.0000	32.94	13.36	46.30	74.00	-27.70	Peak
2	8976.0000	17.20	13.36	30.56	54.00	-23.44	AVG
3	12036.0000	32.11	15.55	47.66	74.00	-26.34	Peak
4	12036.0000	17.11	15.55	32.66	54.00	-21.34	AVG
5	13296.0000	29.86	18.93	48.79	74.00	-25.21	Peak
6	13296.0000	14.29	18.93	33.22	54.00	-20.78	AVG
7	14388.0000	30.81	20.77	51.58	74.00	-22.42	Peak
8	14388.0000	15.63	20.77	36.40	54.00	-17.60	AVG
9	15756.0000	32.80	17.86	50.66	74.00	-23.34	Peak
10	15756.0000	17.63	17.86	35.49	54.00	-18.51	AVG
11	17208.0000	31.65	21.01	52.66	74.00	-21.34	Peak
12 *	17208.0000	16.32	21.01	37.33	54.00	-16.67	AVG


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

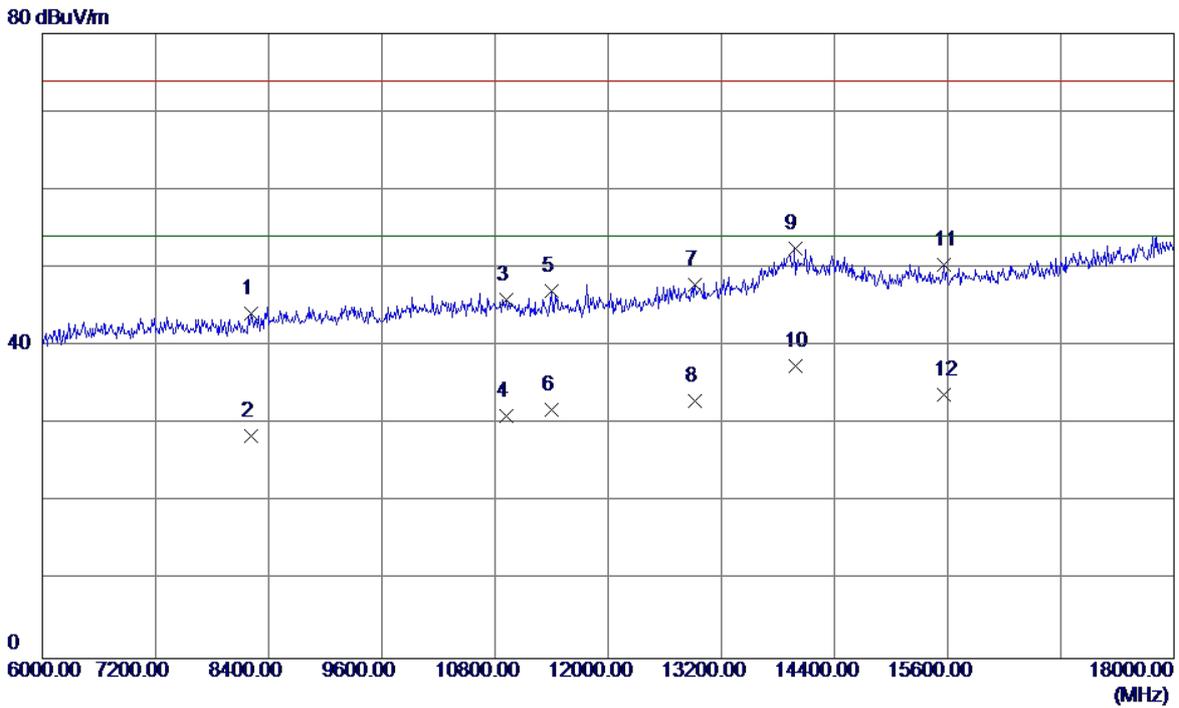

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	8208.0000	31.98	12.25	44.23	74.00	-29.77	Peak
2	8208.0000	16.30	12.25	28.55	54.00	-25.45	AVG
3	10920.0000	30.15	15.83	45.98	74.00	-28.02	Peak
4	10920.0000	15.15	15.83	30.98	54.00	-23.02	AVG
5	11400.0000	31.44	15.57	47.01	74.00	-26.99	Peak
6	11400.0000	16.30	15.57	31.87	54.00	-22.13	AVG
7	12924.0000	30.01	17.89	47.90	74.00	-26.10	Peak
8	12924.0000	15.01	17.89	32.90	54.00	-21.10	AVG
9	13980.0000	30.67	21.74	52.41	74.00	-21.59	Peak
10 *	13980.0000	15.63	21.74	37.37	54.00	-16.63	AVG
11	15564.0000	32.61	17.86	50.47	74.00	-23.53	Peak
12	15564.0000	15.96	17.86	33.82	54.00	-20.18	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		


101 dBuV/m

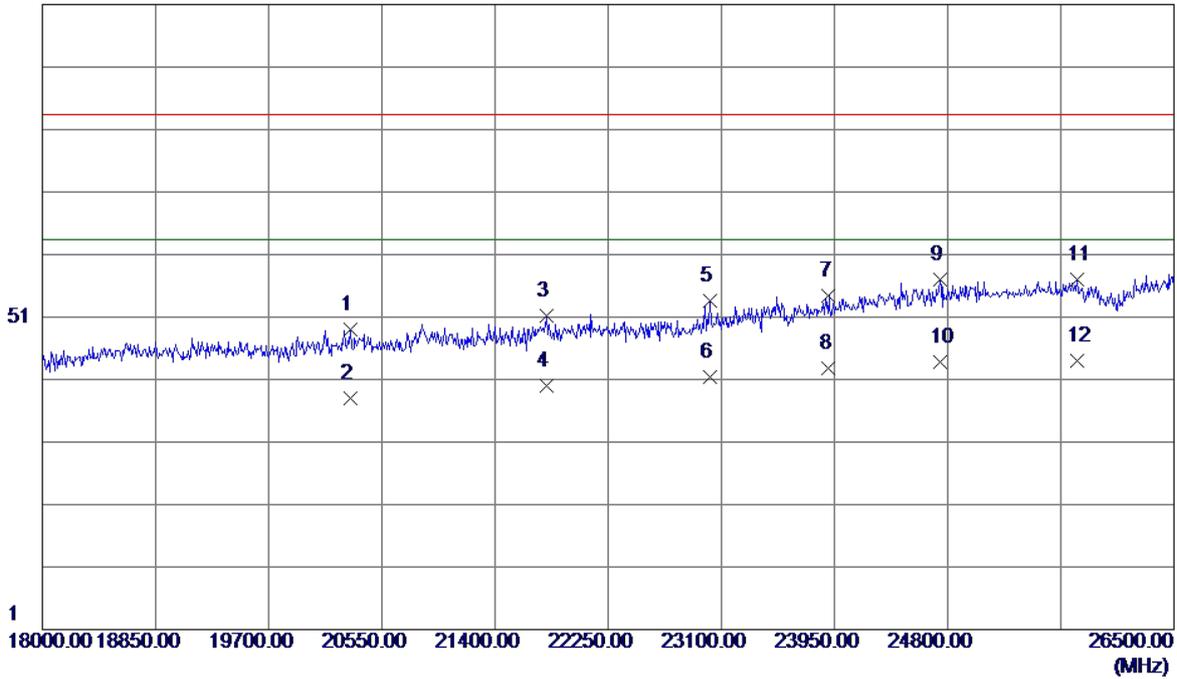

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	20312.0000	29.46	19.48	48.94	83.50	-34.56	Peak
2	20312.0000	18.59	19.48	38.07	63.50	-25.43	AVG
3	21791.0000	30.05	21.22	51.27	83.50	-32.23	Peak
4	21791.0000	18.85	21.22	40.07	63.50	-23.43	AVG
5	23015.0000	29.91	23.65	53.56	83.50	-29.94	Peak
6	23015.0000	17.67	23.65	41.32	63.50	-22.18	AVG
7	23907.5000	29.65	24.77	54.42	83.50	-29.08	Peak
8	23907.5000	18.06	24.77	42.83	63.50	-20.67	AVG
9	24740.5000	31.14	25.92	57.06	83.50	-26.44	Peak
10	24740.5000	17.79	25.92	43.71	63.50	-19.79	AVG
11	25769.0000	30.01	26.97	56.98	83.50	-26.52	Peak
12 *	25769.0000	17.10	26.97	44.07	63.50	-19.43	AVG


EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

101 dBuV/m

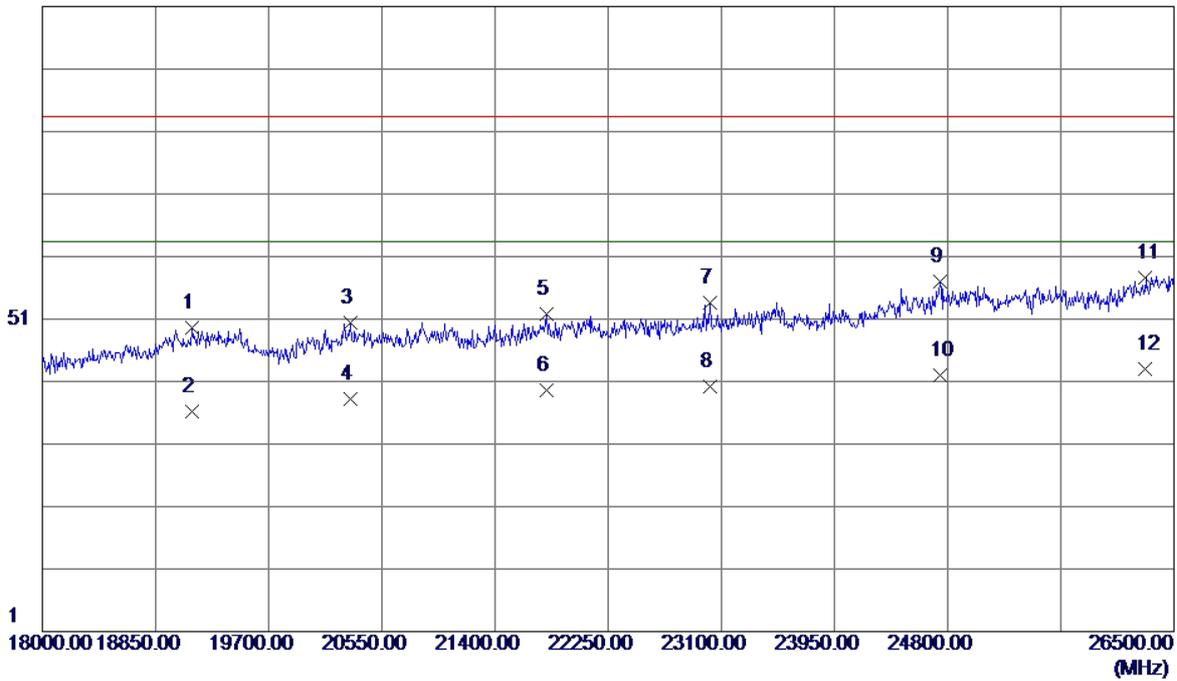


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	19122.0000	29.60	20.06	49.66	83.50	-33.84	Peak
2	19122.0000	16.21	20.06	36.27	63.50	-27.23	AVG
3	20312.0000	30.96	19.48	50.44	83.50	-33.06	Peak
4	20312.0000	18.79	19.48	38.27	63.50	-25.23	AVG
5	21791.0000	30.55	21.22	51.77	83.50	-31.73	Peak
6	21791.0000	18.40	21.22	39.62	63.50	-23.88	AVG
7	23015.0000	29.91	23.65	53.56	83.50	-29.94	Peak
8	23015.0000	16.59	23.65	40.24	63.50	-23.26	AVG
9	24740.5000	31.14	25.92	57.06	83.50	-26.44	Peak
10	24740.5000	16.04	25.92	41.96	63.50	-21.54	AVG
11	26287.5000	30.26	27.42	57.68	83.50	-25.82	Peak
12 *	26287.5000	15.65	27.42	43.07	63.50	-20.43	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

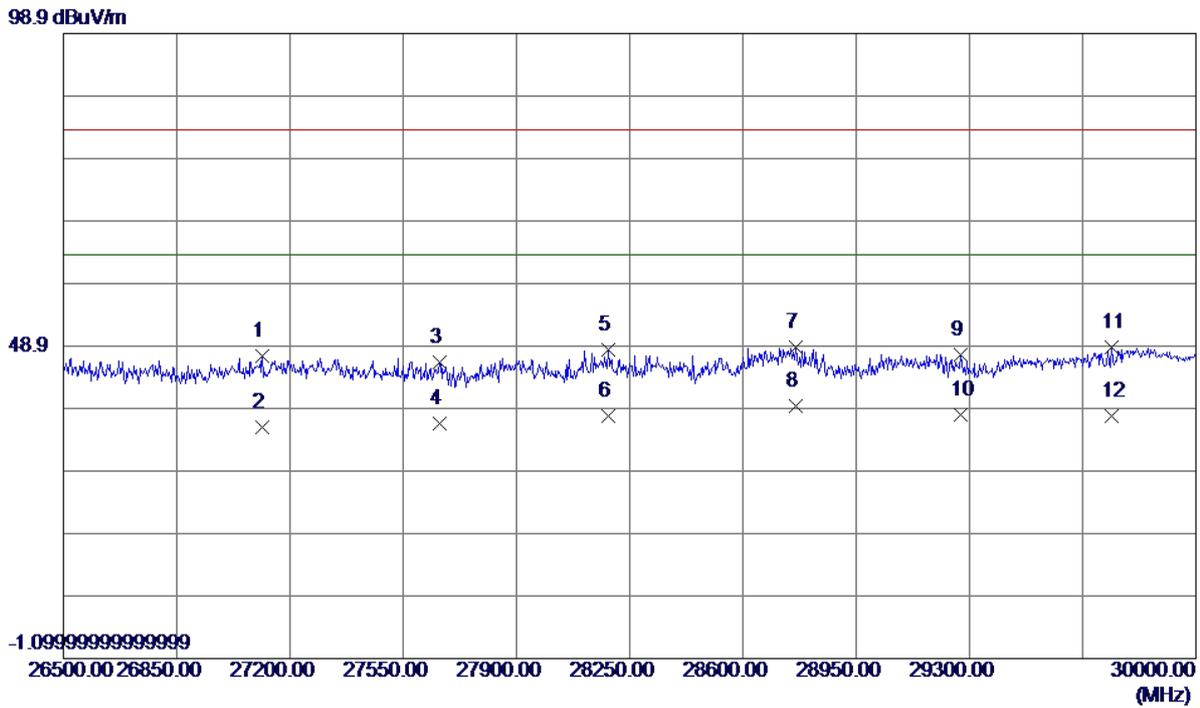


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	27116.0000	43.55	3.74	47.29	83.50	-36.21	Peak
2	27116.0000	32.07	3.74	35.81	63.50	-27.69	AVG
3	27662.0000	42.70	3.69	46.39	83.50	-37.11	Peak
4	27662.0000	32.90	3.69	36.59	63.50	-26.91	AVG
5	28183.5000	43.76	4.46	48.22	83.50	-35.28	Peak
6	28183.5000	33.24	4.46	37.70	63.50	-25.80	AVG
7	28764.5000	43.15	5.47	48.62	83.50	-34.88	Peak
8 *	28764.5000	33.76	5.47	39.23	63.50	-24.27	AVG
9	29272.0000	41.22	6.37	47.59	83.50	-35.91	Peak
10	29272.0000	31.56	6.37	37.93	63.50	-25.57	AVG
11	29741.0000	41.47	7.22	48.69	83.50	-34.81	Peak
12	29741.0000	30.48	7.22	37.70	63.50	-25.80	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Idle+5GHz WIFI+BT+GPS+Camera on		
Note	Adapter:Phitek+USB Cable:FOXCONN+Battery:Sunwoda		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

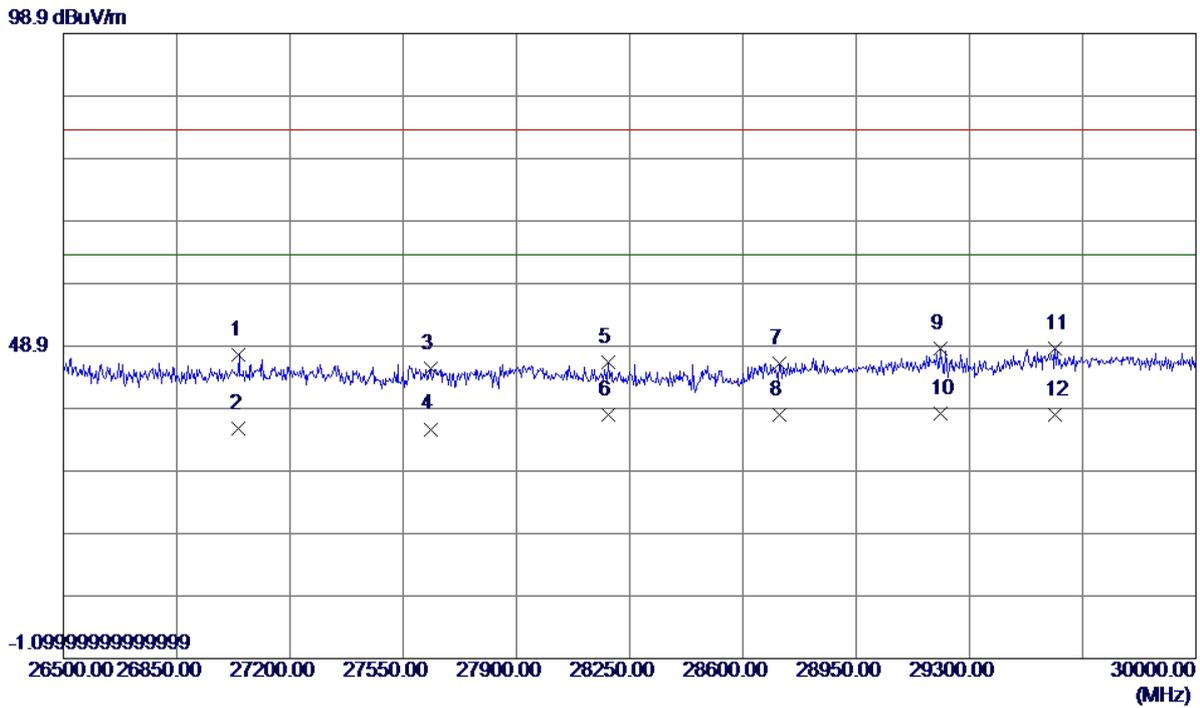


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	27042.5000	43.71	3.79	47.50	83.50	-36.00	Peak
2	27042.5000	31.99	3.79	35.78	63.50	-27.72	AVG
3	27634.0000	41.70	3.65	45.35	83.50	-38.15	Peak
4	27634.0000	31.95	3.65	35.60	63.50	-27.90	AVG
5	28183.5000	41.76	4.46	46.22	83.50	-37.28	Peak
6	28183.5000	33.37	4.46	37.83	63.50	-25.67	AVG
7	28712.0000	40.71	5.37	46.08	83.50	-37.42	Peak
8	28712.0000	32.55	5.37	37.92	63.50	-25.58	AVG
9	29209.0000	42.25	6.27	48.52	83.50	-34.98	Peak
10 *	29209.0000	31.87	6.27	38.14	63.50	-25.36	AVG
11	29566.0000	41.71	6.86	48.57	83.50	-34.93	Peak
12	29566.0000	31.06	6.86	37.92	63.50	-25.58	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

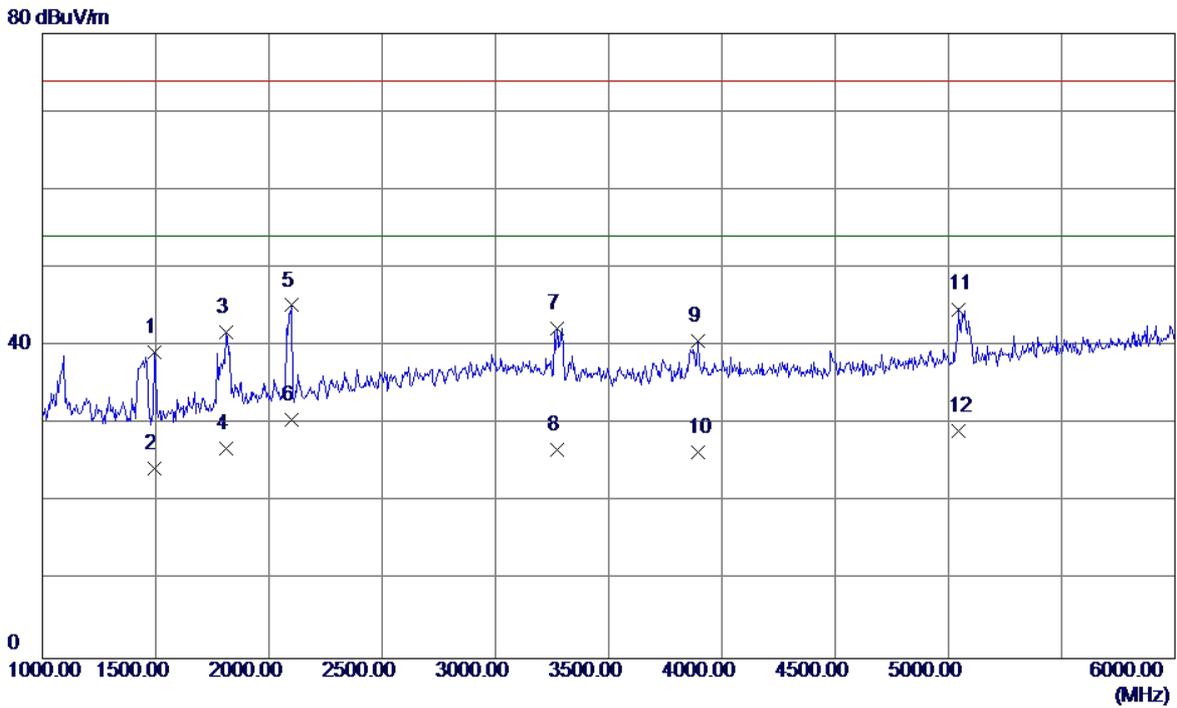


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	45.92	-6.66	39.26	74.00	-34.74	Peak
2	1495.0000	30.92	-6.66	24.26	54.00	-29.74	AVG
3	1810.0000	46.07	-4.28	41.79	74.00	-32.21	Peak
4	1810.0000	31.21	-4.28	26.93	54.00	-27.07	AVG
5	2100.0000	47.65	-2.45	45.20	74.00	-28.80	Peak
6 *	2100.0000	32.96	-2.45	30.51	54.00	-23.49	AVG
7	3270.0000	40.84	1.41	42.25	74.00	-31.75	Peak
8	3270.0000	25.36	1.41	26.77	54.00	-27.23	AVG
9	3895.0000	38.03	2.61	40.64	74.00	-33.36	Peak
10	3895.0000	23.74	2.61	26.35	54.00	-27.65	AVG
11	5045.0000	38.97	5.75	44.72	74.00	-29.28	Peak
12	5045.0000	23.37	5.75	29.12	54.00	-24.88	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Speaker		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

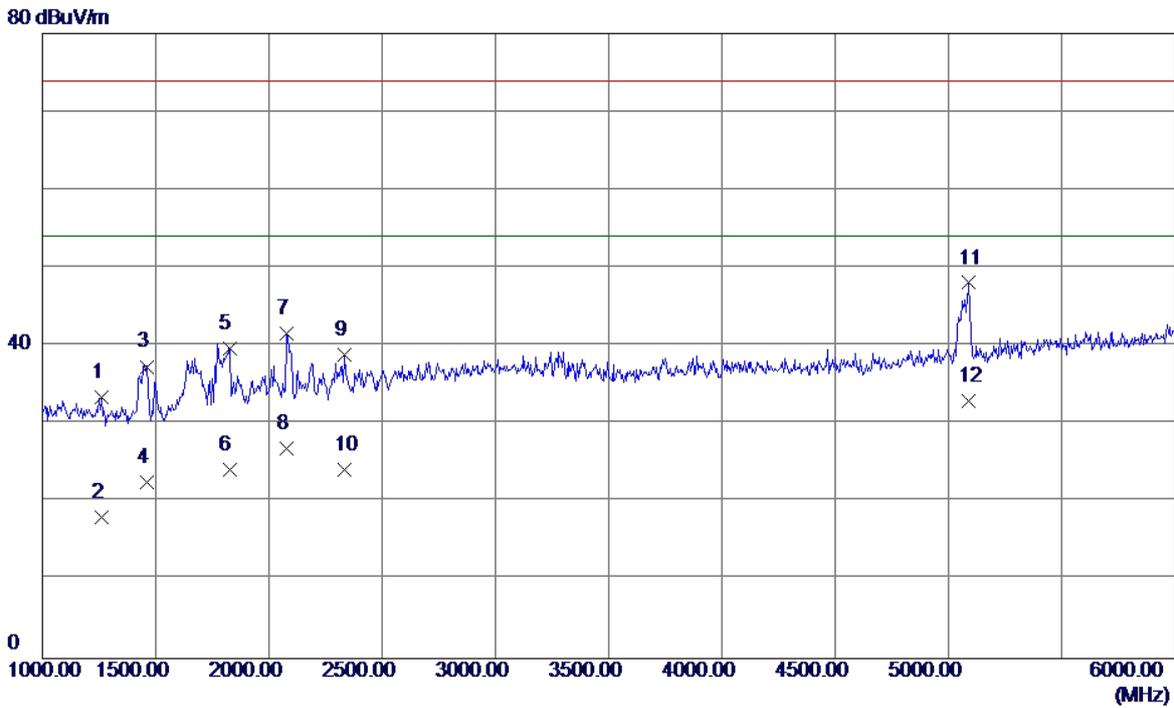


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1260.0000	40.67	-7.26	33.41	74.00	-40.59	Peak
2	1260.0000	25.36	-7.26	18.10	54.00	-35.90	AVG
3	1460.0000	44.11	-6.75	37.36	74.00	-36.64	Peak
4	1460.0000	29.35	-6.75	22.60	54.00	-31.40	AVG
5	1825.0000	43.89	-4.16	39.73	74.00	-34.27	Peak
6	1825.0000	28.35	-4.16	24.19	54.00	-29.81	AVG
7	2080.0000	44.15	-2.52	41.63	74.00	-32.37	Peak
8	2080.0000	29.36	-2.52	26.84	54.00	-27.16	AVG
9	2335.0000	40.42	-1.58	38.84	74.00	-35.16	Peak
10	2335.0000	25.74	-1.58	24.16	54.00	-29.84	AVG
11	5090.0000	42.19	5.89	48.08	74.00	-25.92	Peak
12 *	5090.0000	27.11	5.89	33.00	54.00	-21.00	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

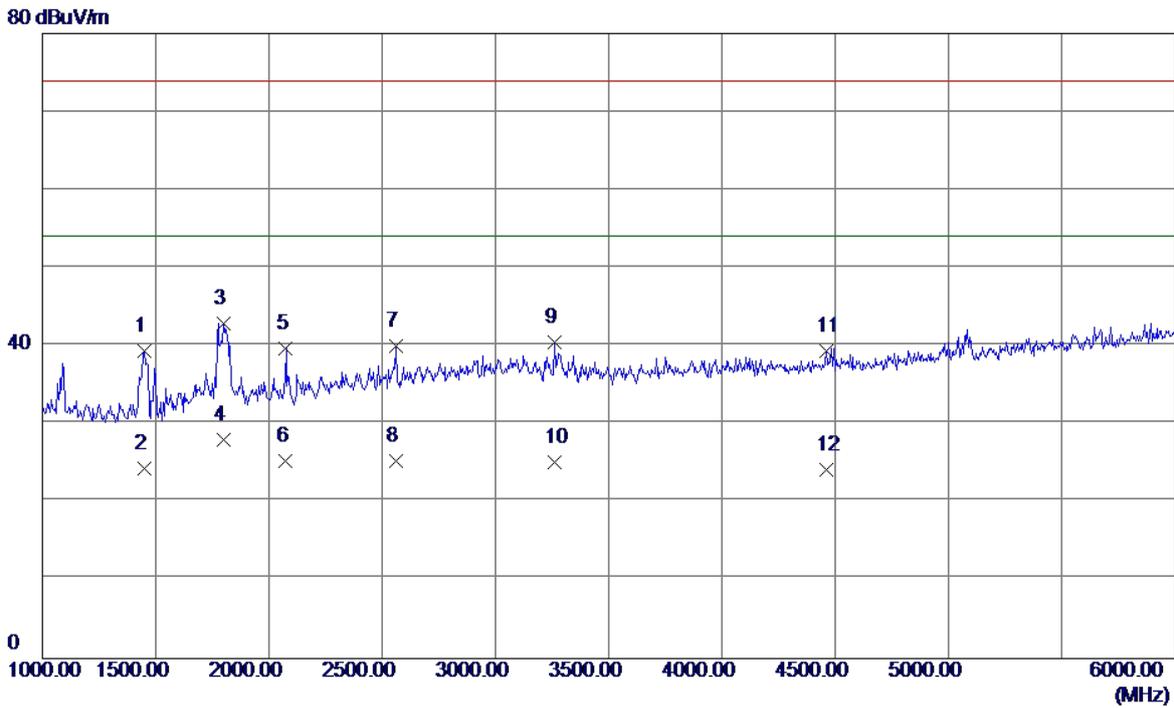


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1450.0000	46.14	-6.78	39.36	74.00	-34.64	Peak
2	1450.0000	31.10	-6.78	24.32	54.00	-29.68	AVG
3	1800.0000	47.19	-4.35	42.84	74.00	-31.16	Peak
4 *	1800.0000	32.41	-4.35	28.06	54.00	-25.94	AVG
5	2075.0000	42.22	-2.54	39.68	74.00	-34.32	Peak
6	2075.0000	27.84	-2.54	25.30	54.00	-28.70	AVG
7	2560.0000	40.69	-0.67	40.02	74.00	-33.98	Peak
8	2560.0000	25.91	-0.67	25.24	54.00	-28.76	AVG
9	3260.0000	39.00	1.42	40.42	74.00	-33.58	Peak
10	3260.0000	23.70	1.42	25.12	54.00	-28.88	AVG
11	4460.0000	35.98	3.44	39.42	74.00	-34.58	Peak
12	4460.0000	20.79	3.44	24.23	54.00	-29.77	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Playing+Earpone		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

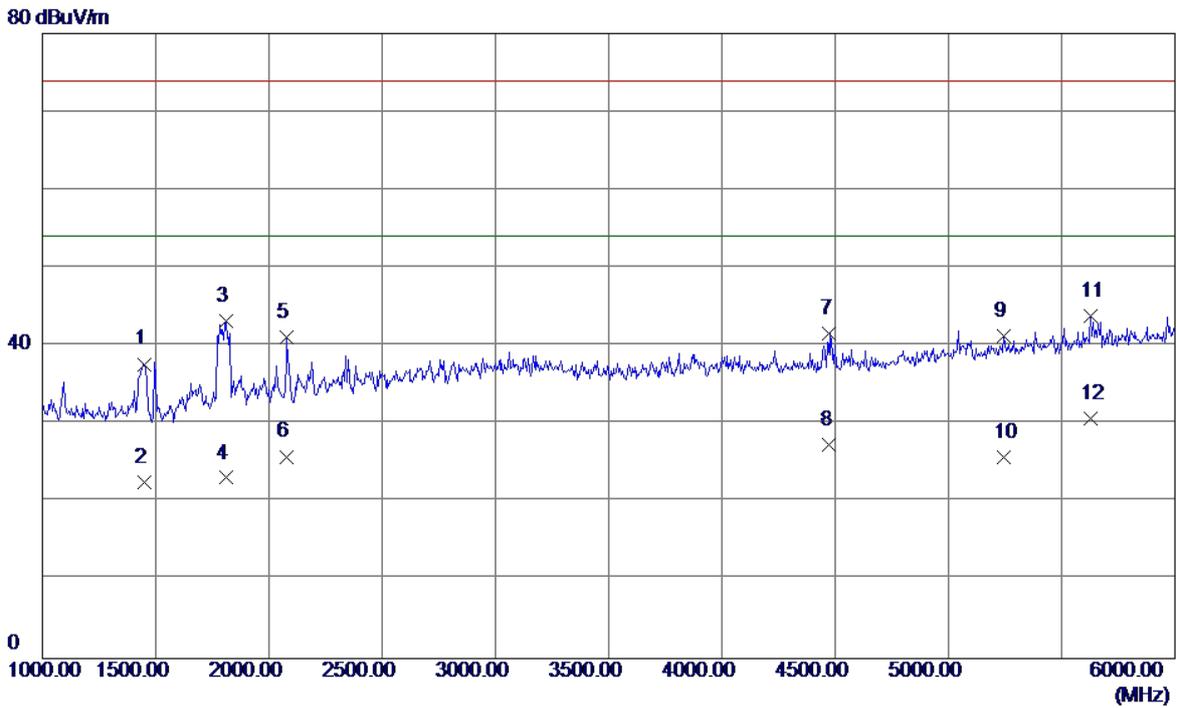


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1450.0000	44.46	-6.78	37.68	74.00	-36.32	Peak
2	1450.0000	29.36	-6.78	22.58	54.00	-31.42	AVG
3	1810.0000	47.42	-4.28	43.14	74.00	-30.86	Peak
4	1810.0000	27.40	-4.28	23.12	54.00	-30.88	AVG
5	2080.0000	43.58	-2.52	41.06	74.00	-32.94	Peak
6	2080.0000	28.36	-2.52	25.84	54.00	-28.16	AVG
7	4475.0000	38.13	3.45	41.58	74.00	-32.42	Peak
8	4475.0000	23.96	3.45	27.41	54.00	-26.59	AVG
9	5245.0000	34.83	6.40	41.23	74.00	-32.77	Peak
10	5245.0000	19.38	6.40	25.78	54.00	-28.22	AVG
11	5630.0000	36.09	7.69	43.78	74.00	-30.22	Peak
12 *	5630.0000	23.09	7.69	30.78	54.00	-23.22	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

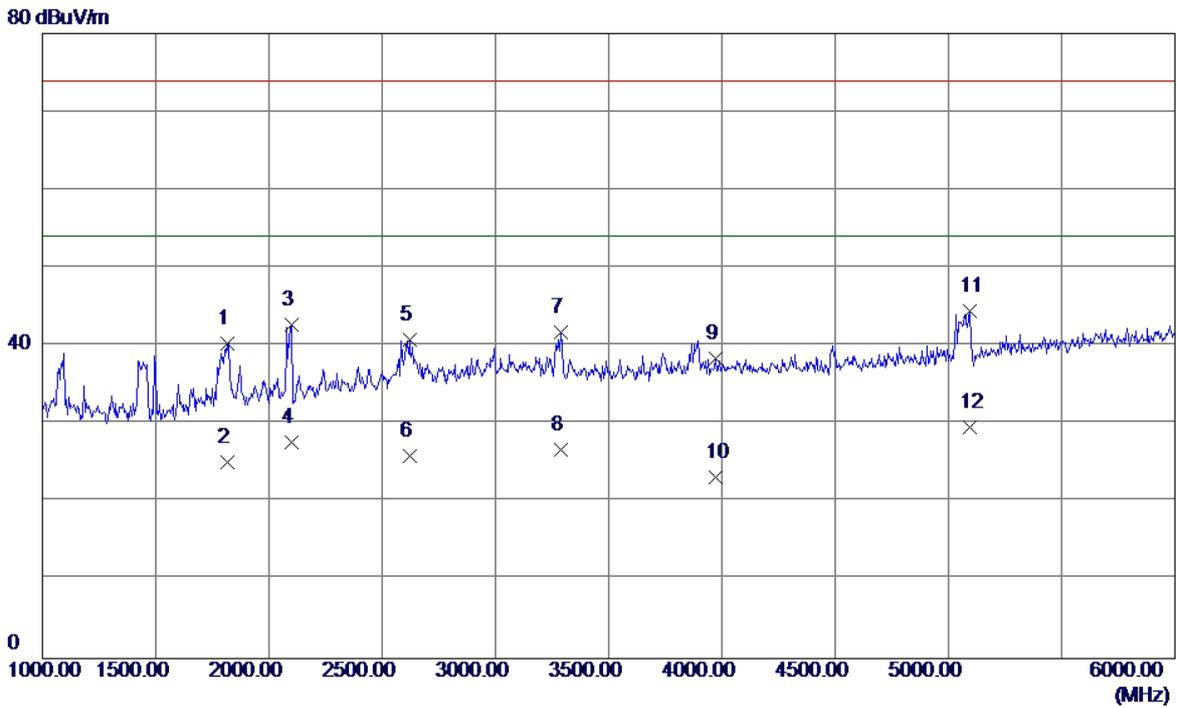


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1815.0000	44.51	-4.24	40.27	74.00	-33.73	Peak
2	1815.0000	29.36	-4.24	25.12	54.00	-28.88	AVG
3	2100.0000	45.14	-2.45	42.69	74.00	-31.31	Peak
4	2100.0000	30.14	-2.45	27.69	54.00	-26.31	AVG
5	2620.0000	41.14	-0.37	40.77	74.00	-33.23	Peak
6	2620.0000	26.35	-0.37	25.98	54.00	-28.02	AVG
7	3290.0000	40.30	1.41	41.71	74.00	-32.29	Peak
8	3290.0000	25.36	1.41	26.77	54.00	-27.23	AVG
9	3970.0000	35.48	2.85	38.33	74.00	-35.67	Peak
10	3970.0000	20.36	2.85	23.21	54.00	-30.79	AVG
11	5095.0000	38.50	5.91	44.41	74.00	-29.59	Peak
12 *	5095.0000	23.70	5.91	29.61	54.00	-24.39	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

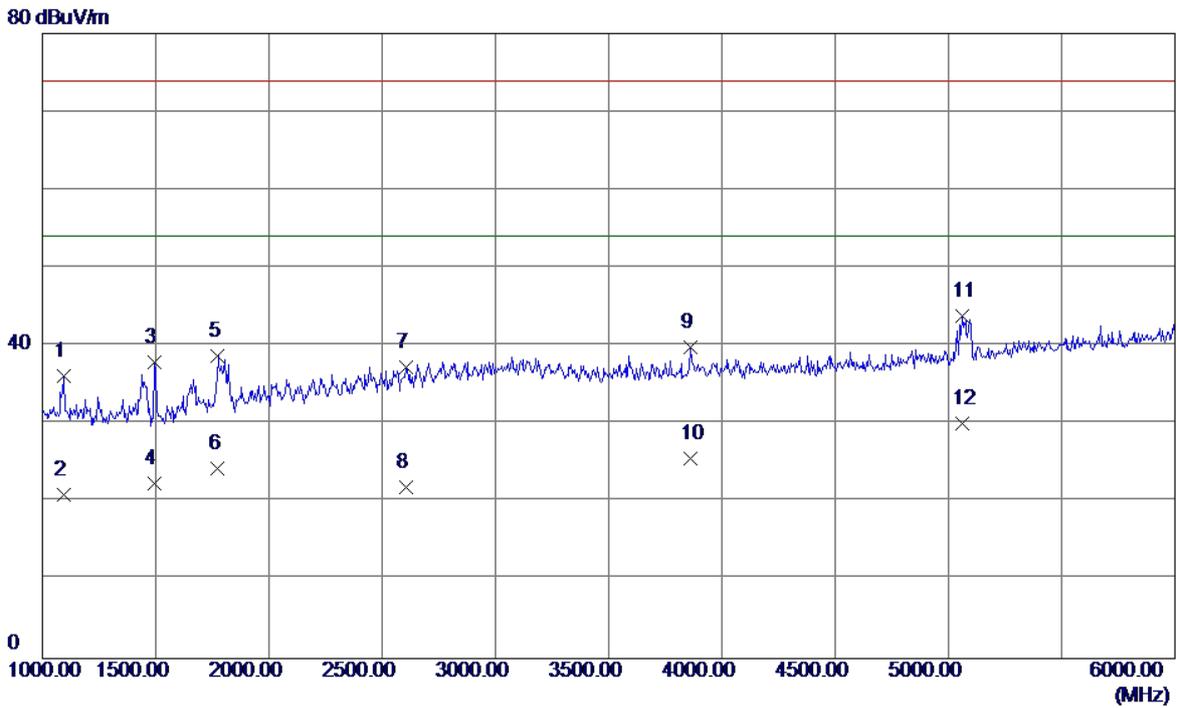


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1095.0000	43.82	-7.69	36.13	74.00	-37.87	Peak
2	1095.0000	28.70	-7.69	21.01	54.00	-32.99	AVG
3	1495.0000	44.63	-6.66	37.97	74.00	-36.03	Peak
4	1495.0000	29.13	-6.66	22.47	54.00	-31.53	AVG
5	1775.0000	43.32	-4.54	38.78	74.00	-35.22	Peak
6	1775.0000	28.91	-4.54	24.37	54.00	-29.63	AVG
7	2605.0000	37.74	-0.44	37.30	74.00	-36.70	Peak
8	2605.0000	22.35	-0.44	21.91	54.00	-32.09	AVG
9	3860.0000	37.31	2.49	39.80	74.00	-34.20	Peak
10	3860.0000	23.14	2.49	25.63	54.00	-28.37	AVG
11	5060.0000	38.03	5.80	43.83	74.00	-30.17	Peak
12 *	5060.0000	24.35	5.80	30.15	54.00	-23.85	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

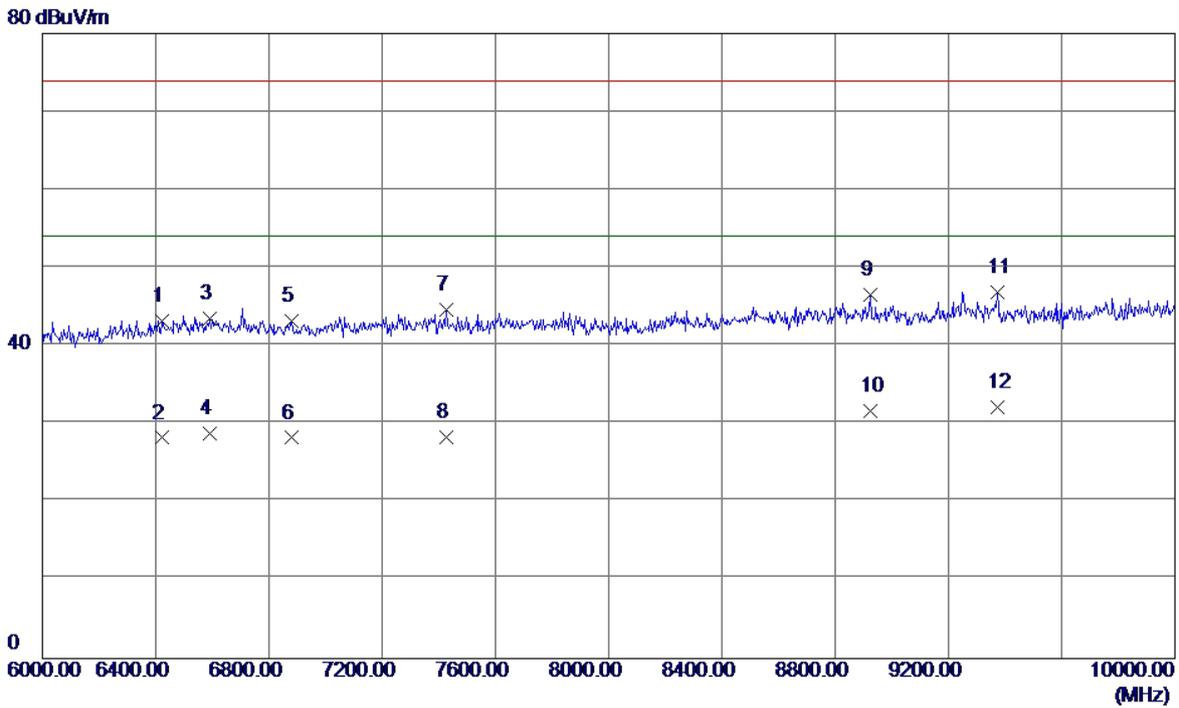


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6424.0000	32.65	10.61	43.26	74.00	-30.74	Peak
2	6424.0000	17.63	10.61	28.24	54.00	-25.76	AVG
3	6592.0000	32.57	10.88	43.45	74.00	-30.55	Peak
4	6592.0000	17.98	10.88	28.86	54.00	-25.14	AVG
5	6880.0000	32.45	10.79	43.24	74.00	-30.76	Peak
6	6880.0000	17.45	10.79	28.24	54.00	-25.76	AVG
7	7428.0000	33.10	11.61	44.71	74.00	-29.29	Peak
8	7428.0000	16.65	11.61	28.26	54.00	-25.74	AVG
9	8924.0000	33.24	13.32	46.56	74.00	-27.44	Peak
10	8924.0000	18.36	13.32	31.68	54.00	-22.32	AVG
11	9372.0000	33.65	13.25	46.90	74.00	-27.10	Peak
12 *	9372.0000	18.91	13.25	32.16	54.00	-21.84	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(GSM)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

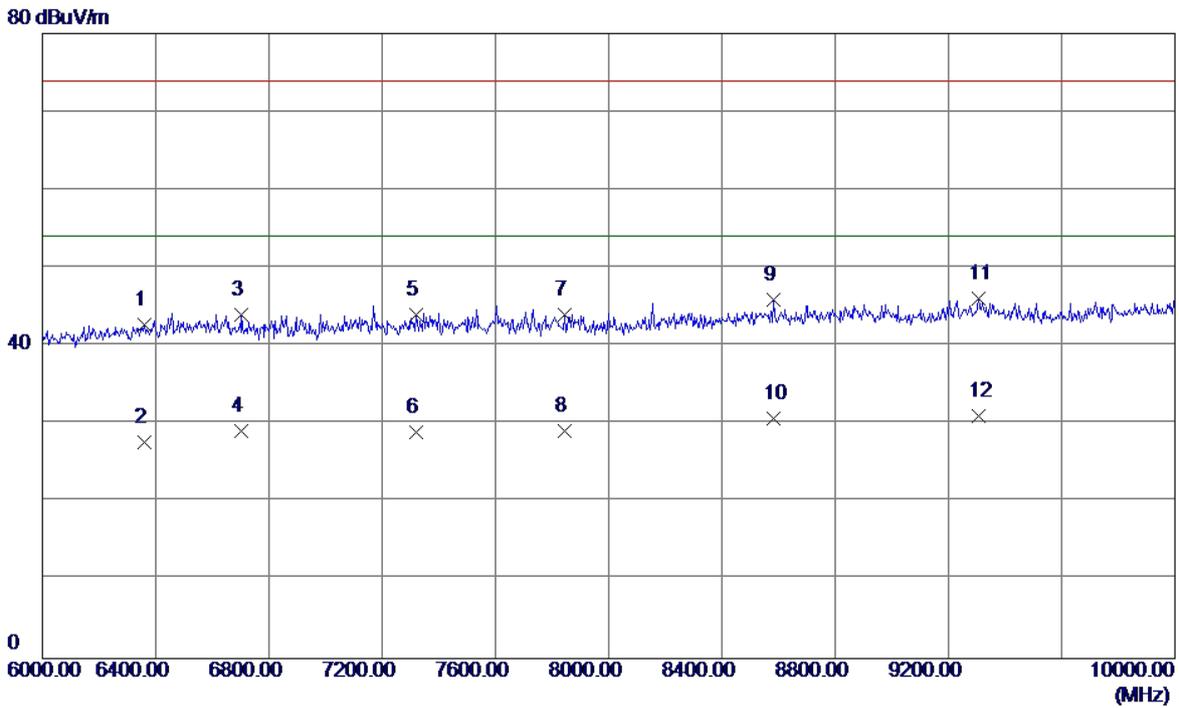


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6360.0000	32.32	10.37	42.69	74.00	-31.31	Peak
2	6360.0000	17.36	10.37	27.73	54.00	-26.27	AVG
3	6704.0000	33.14	10.84	43.98	74.00	-30.02	Peak
4	6704.0000	18.24	10.84	29.08	54.00	-24.92	AVG
5	7320.0000	32.55	11.39	43.94	74.00	-30.06	Peak
6	7320.0000	17.63	11.39	29.02	54.00	-24.98	AVG
7	7844.0000	32.34	11.73	44.07	74.00	-29.93	Peak
8	7844.0000	17.35	11.73	29.08	54.00	-24.92	AVG
9	8584.0000	32.82	13.06	45.88	74.00	-28.12	Peak
10	8584.0000	17.67	13.06	30.73	54.00	-23.27	AVG
11	9308.0000	32.80	13.27	46.07	74.00	-27.93	Peak
12 *	9308.0000	17.70	13.27	30.97	54.00	-23.03	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

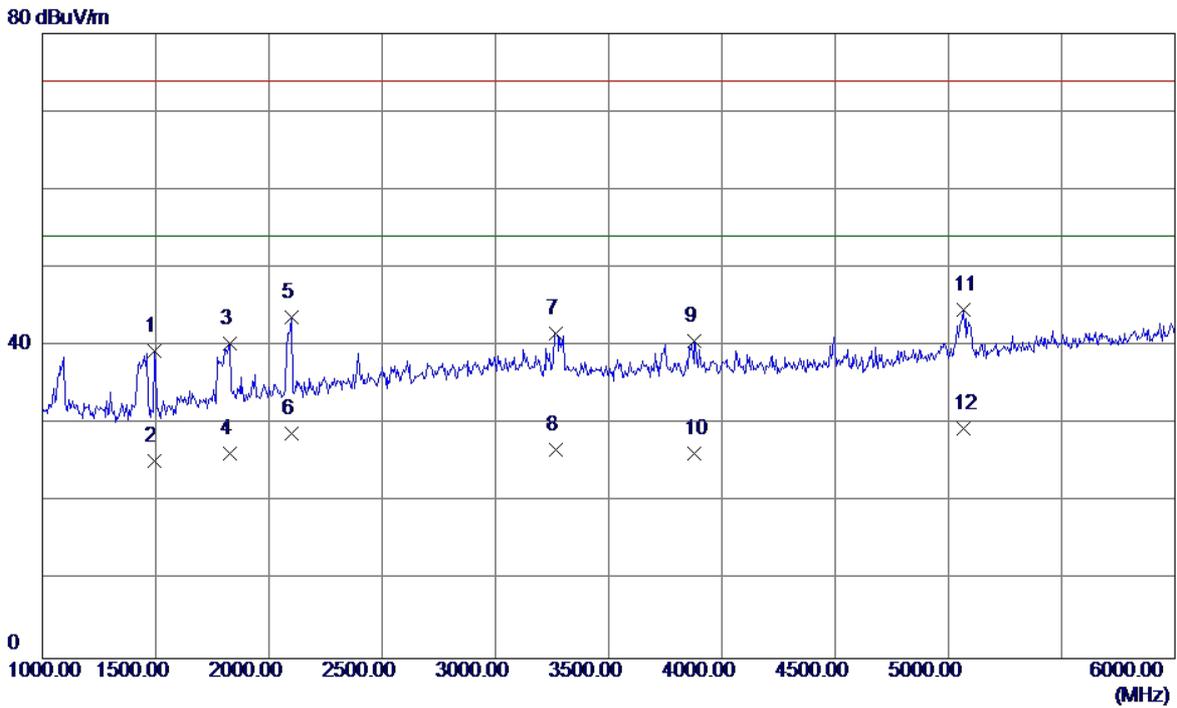


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1495.0000	46.08	-6.66	39.42	74.00	-34.58	Peak
2	1495.0000	32.00	-6.66	25.34	54.00	-28.66	AVG
3	1830.0000	44.37	-4.12	40.25	74.00	-33.75	Peak
4	1830.0000	30.39	-4.12	26.27	54.00	-27.73	AVG
5	2100.0000	46.20	-2.45	43.75	74.00	-30.25	Peak
6	2100.0000	31.25	-2.45	28.80	54.00	-25.20	AVG
7	3265.0000	40.25	1.42	41.67	74.00	-32.33	Peak
8	3265.0000	25.25	1.42	26.67	54.00	-27.33	AVG
9	3880.0000	38.13	2.56	40.69	74.00	-33.31	Peak
10	3880.0000	23.69	2.56	26.25	54.00	-27.75	AVG
11	5065.0000	38.87	5.81	44.68	74.00	-29.32	Peak
12 *	5065.0000	23.70	5.81	29.51	54.00	-24.49	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

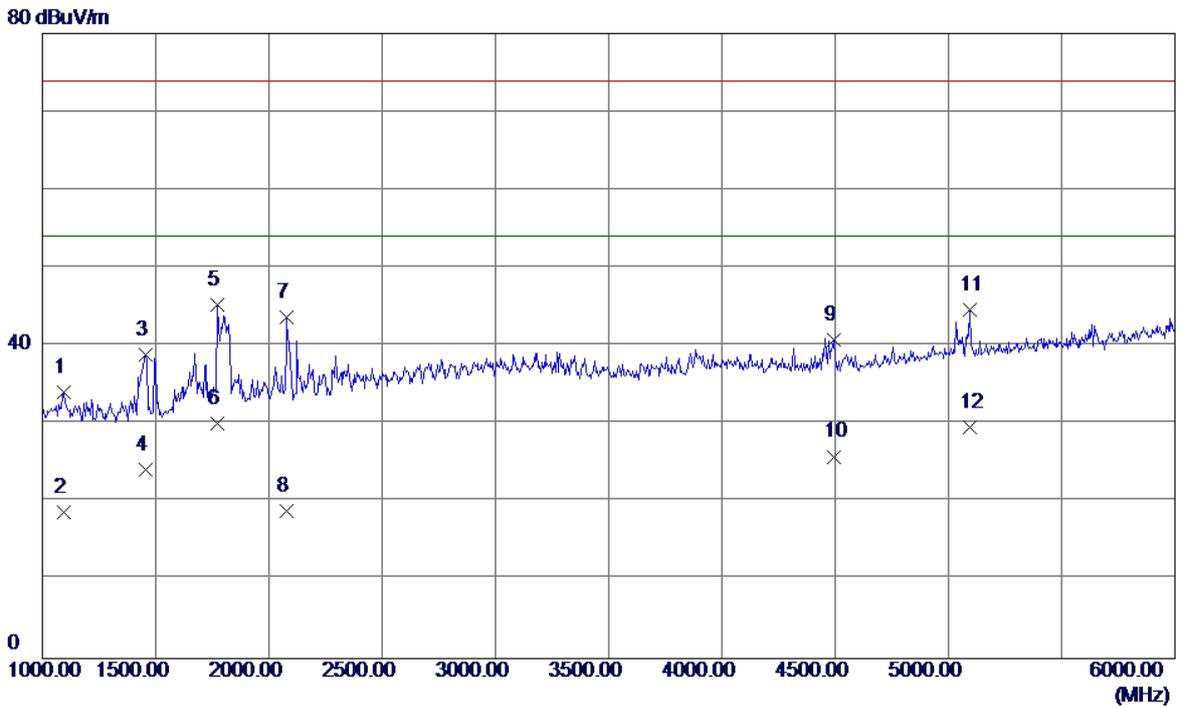


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1095.0000	41.82	-7.69	34.13	74.00	-39.87	Peak
2	1095.0000	26.37	-7.69	18.68	54.00	-35.32	AVG
3	1455.0000	45.70	-6.77	38.93	74.00	-35.07	Peak
4	1455.0000	30.97	-6.77	24.20	54.00	-29.80	AVG
5	1770.0000	49.90	-4.58	45.32	74.00	-28.68	Peak
6 *	1770.0000	34.62	-4.58	30.04	54.00	-23.96	AVG
7	2080.0000	46.13	-2.52	43.61	74.00	-30.39	Peak
8	2080.0000	21.36	-2.52	18.84	54.00	-35.16	AVG
9	4495.0000	37.38	3.47	40.85	74.00	-33.15	Peak
10	4495.0000	22.37	3.47	25.84	54.00	-28.16	AVG
11	5095.0000	38.77	5.91	44.68	74.00	-29.32	Peak
12	5095.0000	23.70	5.91	29.61	54.00	-24.39	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

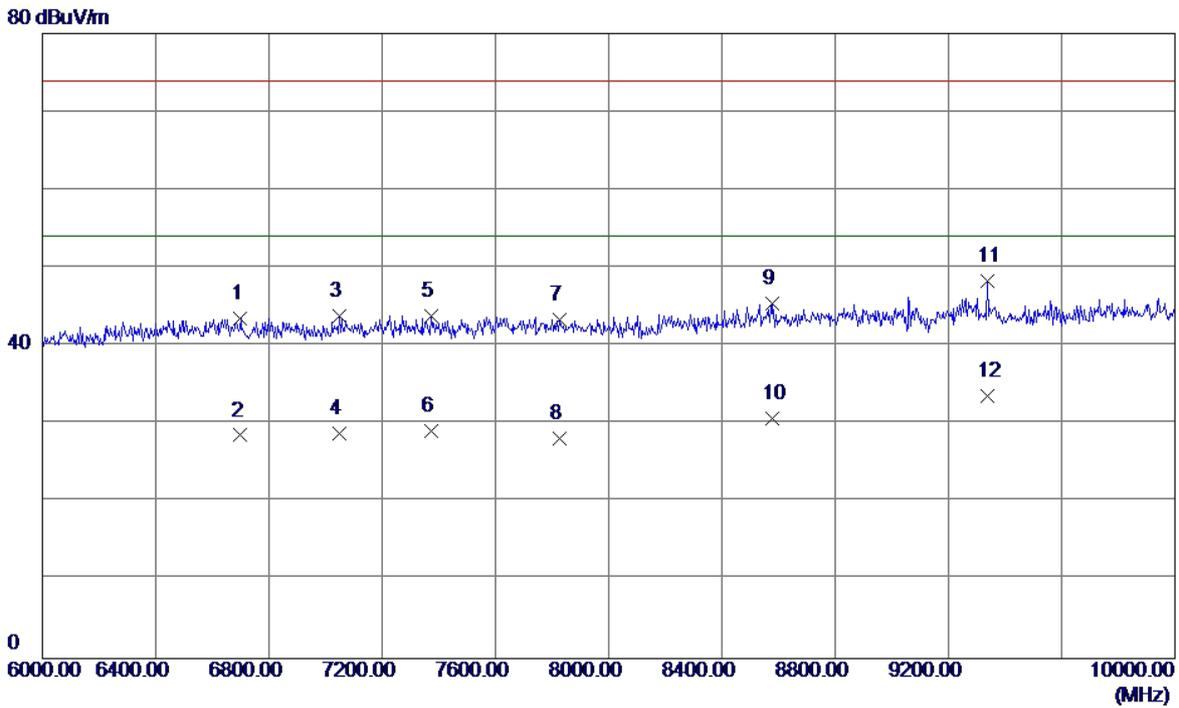


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6700.0000	32.72	10.84	43.56	74.00	-30.44	Peak
2	6700.0000	17.72	10.84	28.56	54.00	-25.44	AVG
3	7048.0000	33.01	10.85	43.86	74.00	-30.14	Peak
4	7048.0000	18.01	10.85	28.86	54.00	-25.14	AVG
5	7372.0000	32.42	11.49	43.91	74.00	-30.09	Peak
6	7372.0000	17.63	11.49	29.12	54.00	-24.88	AVG
7	7828.0000	31.69	11.73	43.42	74.00	-30.58	Peak
8	7828.0000	16.36	11.73	28.09	54.00	-25.91	AVG
9	8576.0000	32.32	13.06	45.38	74.00	-28.62	Peak
10	8576.0000	17.67	13.06	30.73	54.00	-23.27	AVG
11	9336.0000	35.08	13.26	48.34	74.00	-25.66	Peak
12 *	9336.0000	20.36	13.26	33.62	54.00	-20.38	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(WCDMA)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

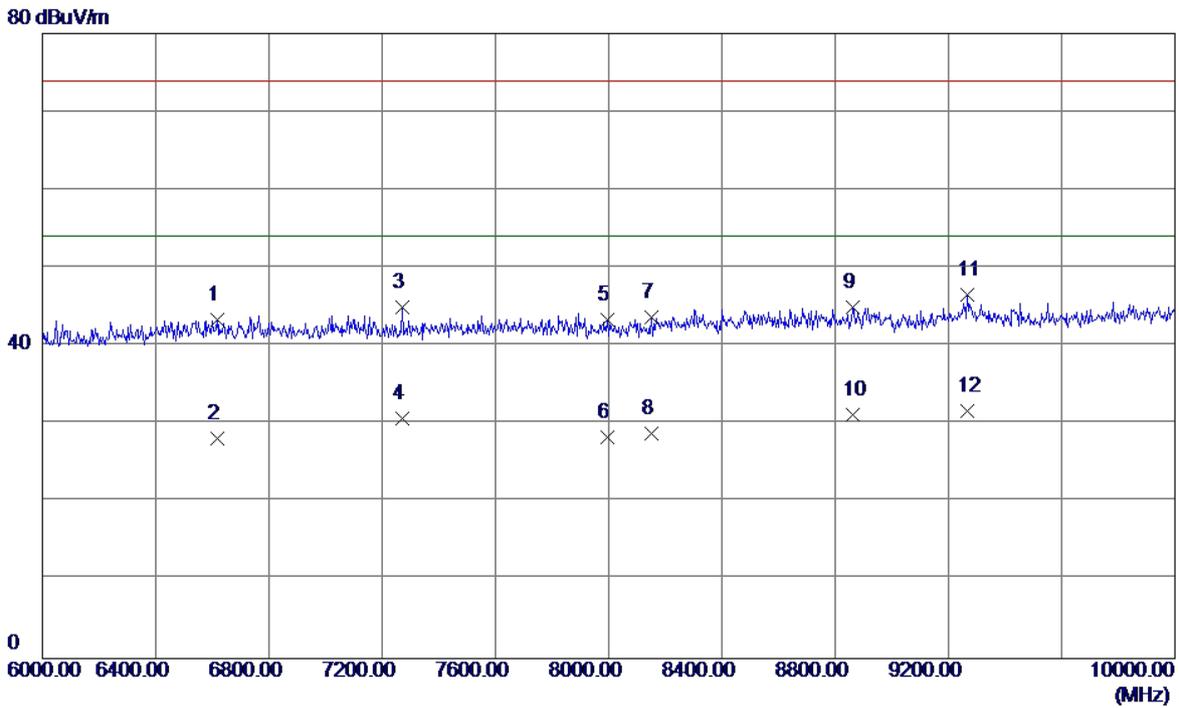


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	6616.0000	32.42	10.87	43.29	74.00	-30.71	Peak
2	6616.0000	17.36	10.87	28.23	54.00	-25.77	AVG
3	7272.0000	33.64	11.29	44.93	74.00	-29.07	Peak
4	7272.0000	19.36	11.29	30.65	54.00	-23.35	AVG
5	7996.0000	31.62	11.72	43.34	74.00	-30.66	Peak
6	7996.0000	16.63	11.72	28.35	54.00	-25.65	AVG
7	8152.0000	31.63	12.11	43.74	74.00	-30.26	Peak
8	8152.0000	16.66	12.11	28.77	54.00	-25.23	AVG
9	8864.0000	31.66	13.28	44.94	74.00	-29.06	Peak
10	8864.0000	17.98	13.28	31.26	54.00	-22.74	AVG
11	9268.0000	33.34	13.29	46.63	74.00	-27.37	Peak
12 *	9268.0000	18.36	13.29	31.65	54.00	-22.35	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

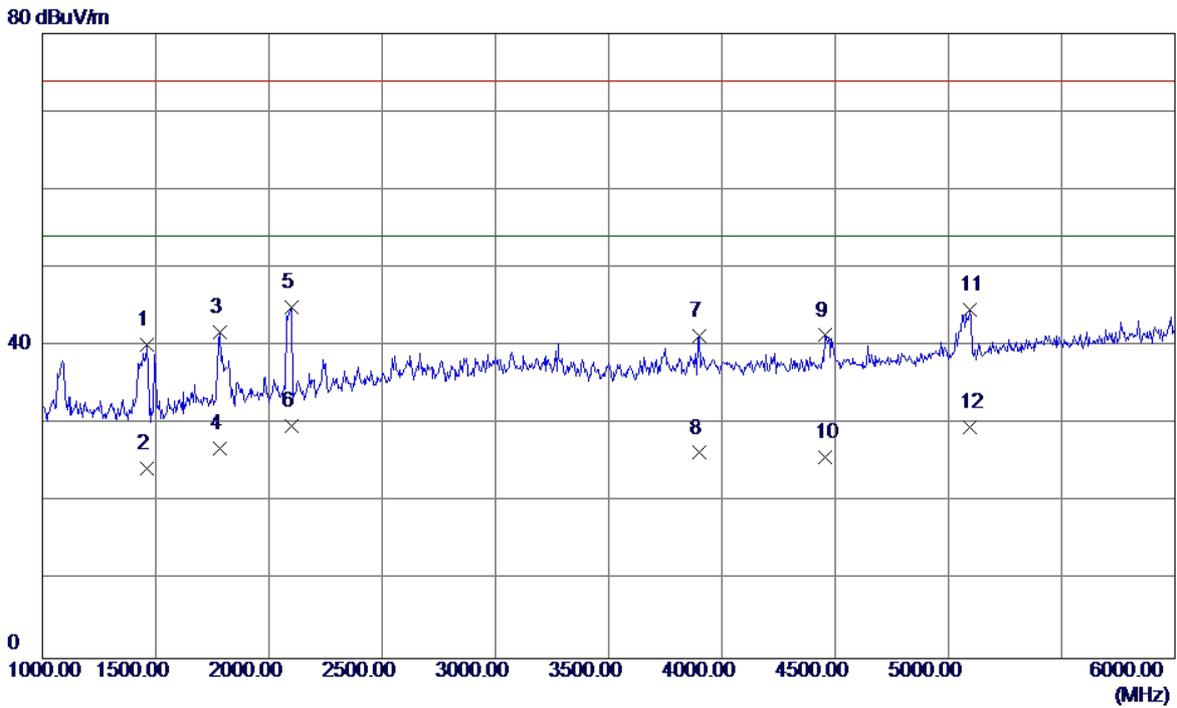


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1460.0000	46.96	-6.75	40.21	74.00	-33.79	Peak
2	1460.0000	31.14	-6.75	24.39	54.00	-29.61	AVG
3	1785.0000	46.29	-4.47	41.82	74.00	-32.18	Peak
4	1785.0000	31.29	-4.47	26.82	54.00	-27.18	AVG
5	2100.0000	47.41	-2.45	44.96	74.00	-29.04	Peak
6 *	2100.0000	32.14	-2.45	29.69	54.00	-24.31	AVG
7	3900.0000	38.65	2.62	41.27	74.00	-32.73	Peak
8	3900.0000	23.70	2.62	26.32	54.00	-27.68	AVG
9	4455.0000	37.93	3.43	41.36	74.00	-32.64	Peak
10	4455.0000	22.36	3.43	25.79	54.00	-28.21	AVG
11	5095.0000	38.78	5.91	44.69	74.00	-29.31	Peak
12	5095.0000	23.70	5.91	29.61	54.00	-24.39	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

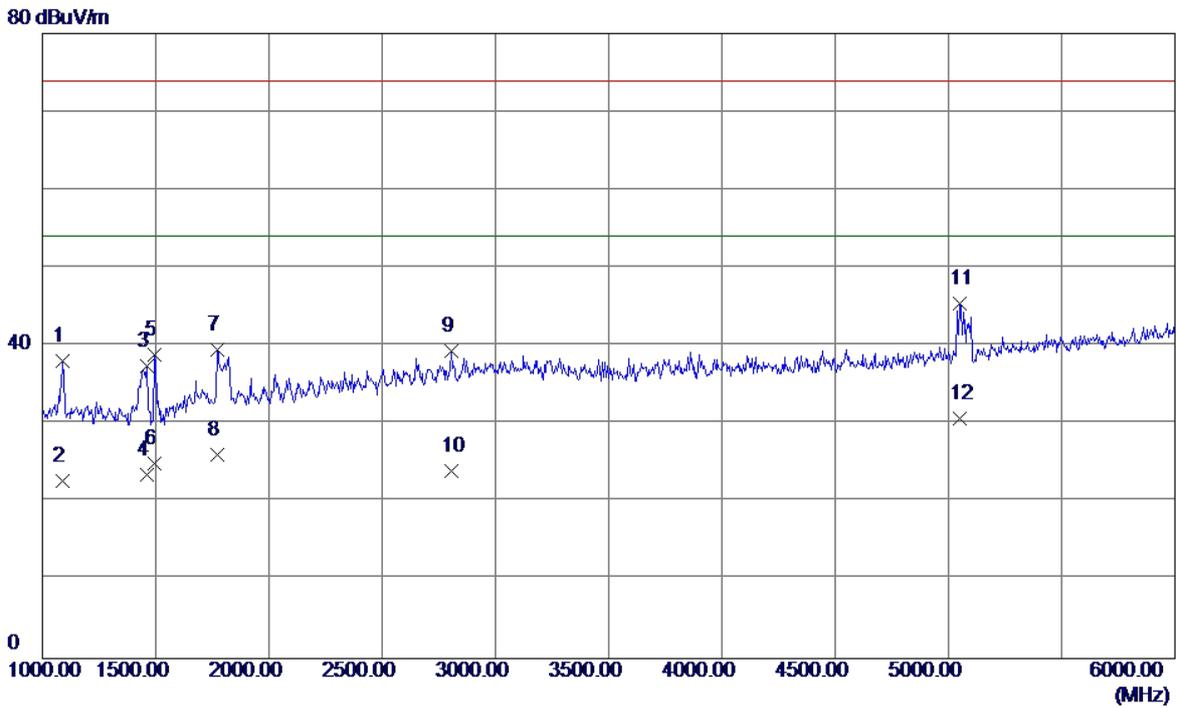


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	1090.0000	45.73	-7.70	38.03	74.00	-35.97	Peak
2	1090.0000	30.36	-7.70	22.66	54.00	-31.34	AVG
3	1460.0000	44.18	-6.75	37.43	74.00	-36.57	Peak
4	1460.0000	30.23	-6.75	23.48	54.00	-30.52	AVG
5	1495.0000	45.48	-6.66	38.82	74.00	-35.18	Peak
6	1495.0000	31.59	-6.66	24.93	54.00	-29.07	AVG
7	1770.0000	44.04	-4.58	39.46	74.00	-34.54	Peak
8	1770.0000	30.69	-4.58	26.11	54.00	-27.89	AVG
9	2805.0000	38.82	0.55	39.37	74.00	-34.63	Peak
10	2805.0000	23.39	0.55	23.94	54.00	-30.06	AVG
11	5050.0000	39.66	5.76	45.42	74.00	-28.58	Peak
12 *	5050.0000	24.99	5.76	30.75	54.00	-23.25	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Vertical
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

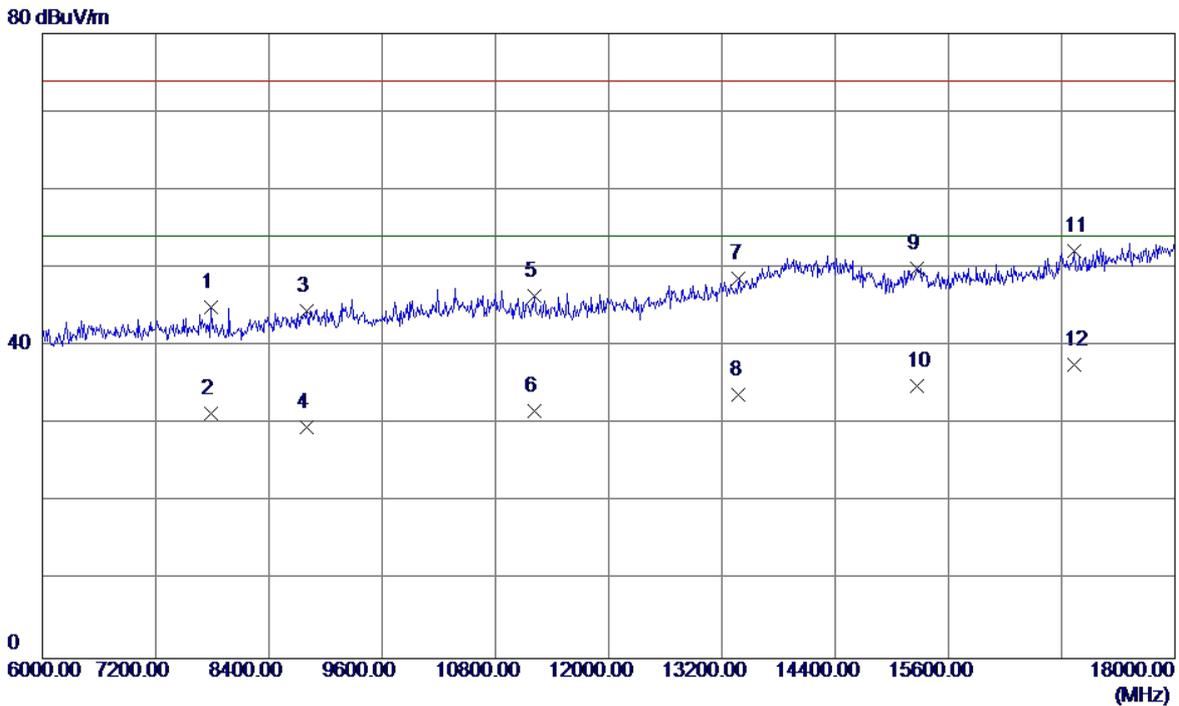

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	7788.0000	33.20	11.73	44.93	74.00	-29.07	Peak
2	7788.0000	19.70	11.73	31.43	54.00	-22.57	AVG
3	8796.0000	31.24	13.22	44.46	74.00	-29.54	Peak
4	8796.0000	16.37	13.22	29.59	54.00	-24.41	AVG
5	11208.0000	30.70	15.74	46.44	74.00	-27.56	Peak
6	11208.0000	15.98	15.74	31.72	54.00	-22.28	AVG
7	13380.0000	29.53	19.15	48.68	74.00	-25.32	Peak
8	13380.0000	14.63	19.15	33.78	54.00	-20.22	AVG
9	15264.0000	31.95	17.93	49.88	74.00	-24.12	Peak
10	15264.0000	16.97	17.93	34.90	54.00	-19.10	AVG
11	16932.0000	32.13	19.96	52.09	74.00	-21.91	Peak
12 *	16932.0000	17.64	19.96	37.60	54.00	-16.40	AVG

EUT	HUAWEI MediaPad M3	Model Name	BTV-DL09
Temperature	25°C	Relative Humidity	60%
Test Voltage	AC 120V/60Hz	Polarization	Horizontal
Test Mode	Adapter+Traffic(LTE)		
Note	Adapter:HK+USB Cable:FOXCONN+Battery:Harbin Coslight		
Test Engineer	Lucky Mao		
Test Date	Jul. 28, 2016		

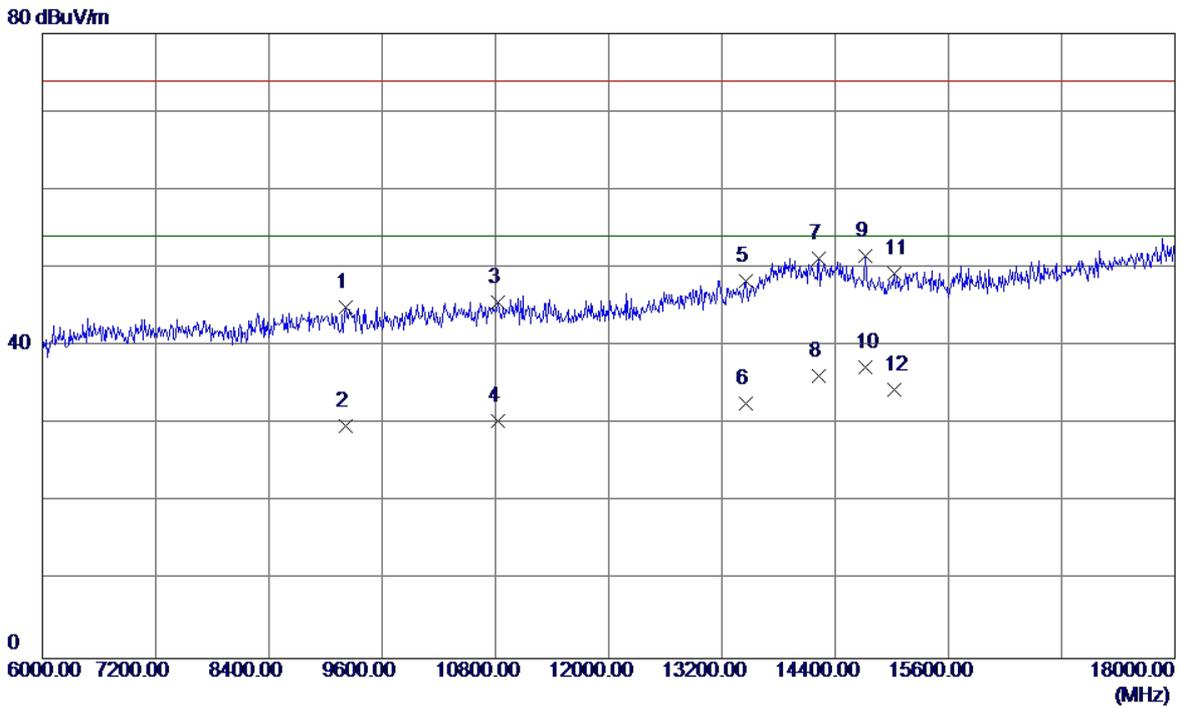

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector
1	9216.0000	31.64	13.30	44.94	74.00	-29.06	Peak
2	9216.0000	16.39	13.30	29.69	54.00	-24.31	AVG
3	10824.0000	29.97	15.70	45.67	74.00	-28.33	Peak
4	10824.0000	14.70	15.70	30.40	54.00	-23.60	AVG
5	13452.0000	28.96	19.35	48.31	74.00	-25.69	Peak
6	13452.0000	13.24	19.35	32.59	54.00	-21.41	AVG
7	14232.0000	30.03	21.20	51.23	74.00	-22.77	Peak
8	14232.0000	15.03	21.20	36.23	54.00	-17.77	AVG
9	14724.0000	32.21	19.37	51.58	74.00	-22.42	Peak
10 *	14724.0000	17.96	19.37	37.33	54.00	-16.67	AVG
11	15024.0000	31.26	18.00	49.26	74.00	-24.74	Peak
12	15024.0000	16.36	18.00	34.36	54.00	-19.64	AVG