


Appendix G

Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109


ADAPTER TPCA-053065E

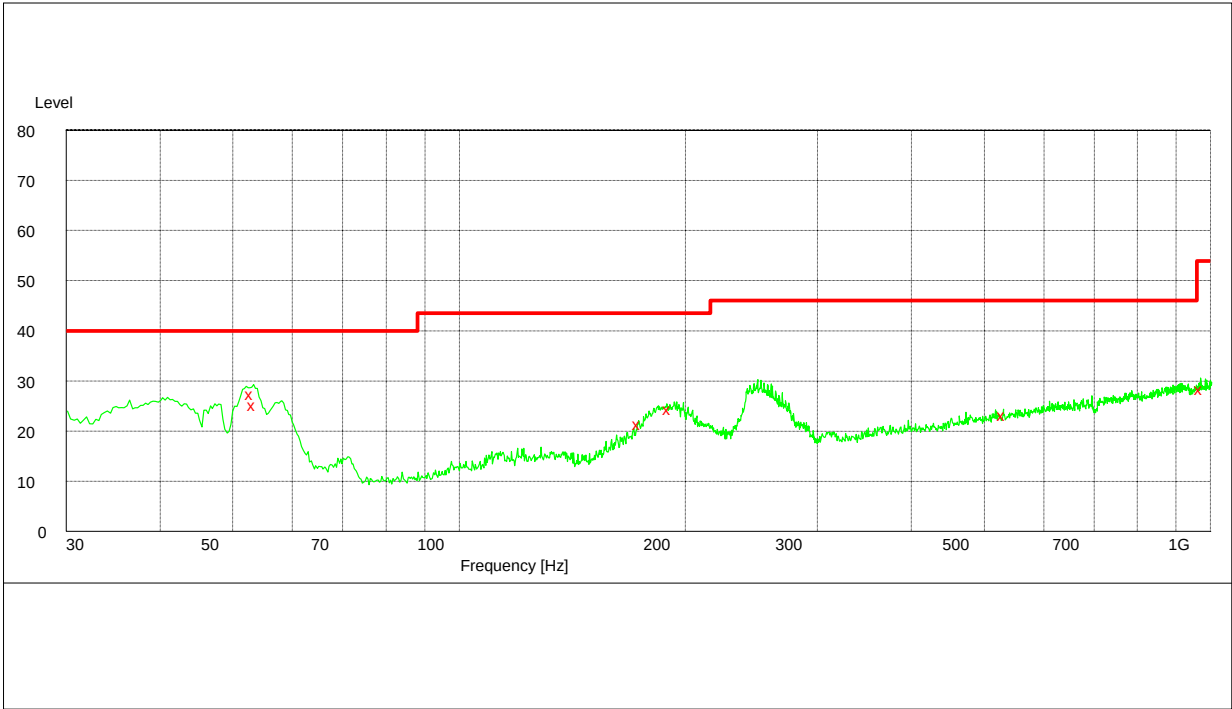

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
53.100000	27.40	-16.9	40.0	12.6	112.0	58.00	VERTICAL
53.460000	25.20	-17.0	40.0	14.8	128.0	67.00	VERTICAL
174.060000	21.50	-14.1	43.5	22.0	147.0	329.00	HORIZONTAL
192.420000	24.60	-14.2	43.5	18.9	156.0	340.00	HORIZONTAL
529.200000	23.10	-5.0	46.0	22.9	312.0	23.00	HORIZONTAL
973.680000	28.40	1.7	54.0	25.6	220.0	227.00	VERTICAL

ADAPTER XQLCHW03

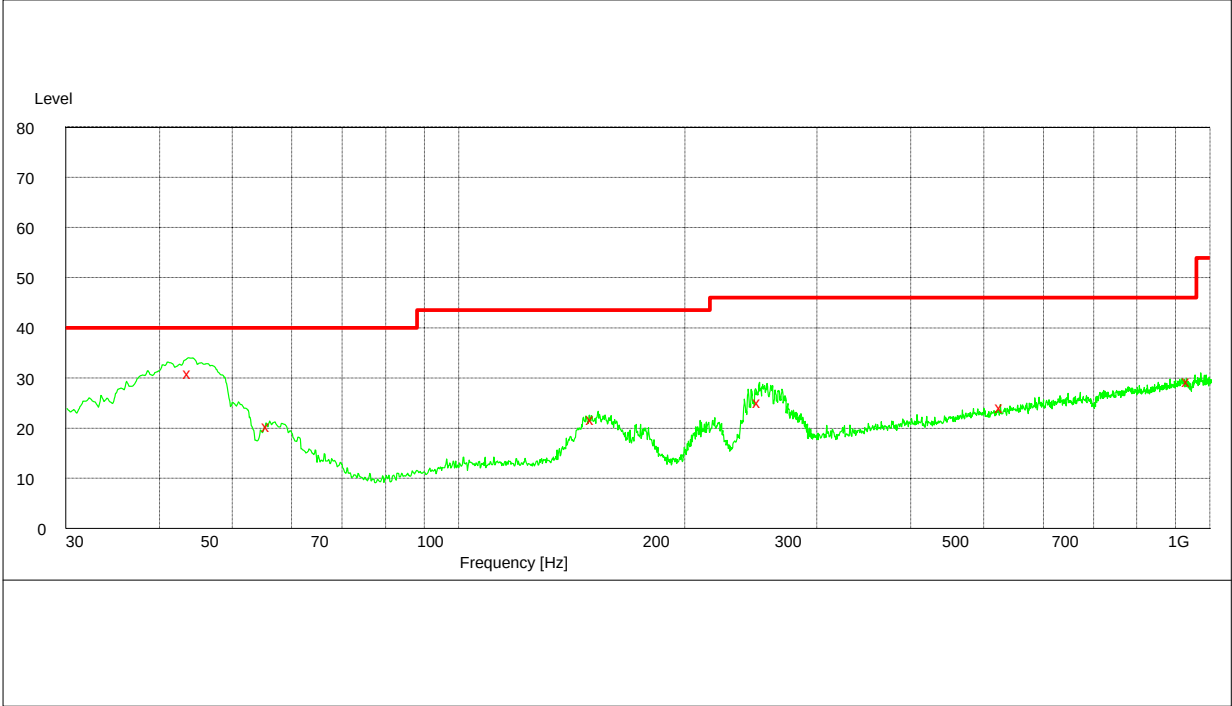

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
43.980000	31.00	-13.5	40.0	9.0	108.0	360.00	VERTICAL
55.680000	20.90	-17.6	40.0	19.1	190.0	32.00	VERTICAL
153.420000	21.10	-14.5	43.5	32.4	162.0	15.00	HORIZONTAL
252.180000	25.20	-10.8	46.0	10.8	100.0	360.00	HORIZONTAL
528.600000	23.00	-5.0	46.0	23.0	273.0	82.00	VERTICAL
959.400000	29.60	1.6	46.0	16.4	155.0	84.00	HORIZONTAL