


Appendix G

Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109


TPCA-053065E

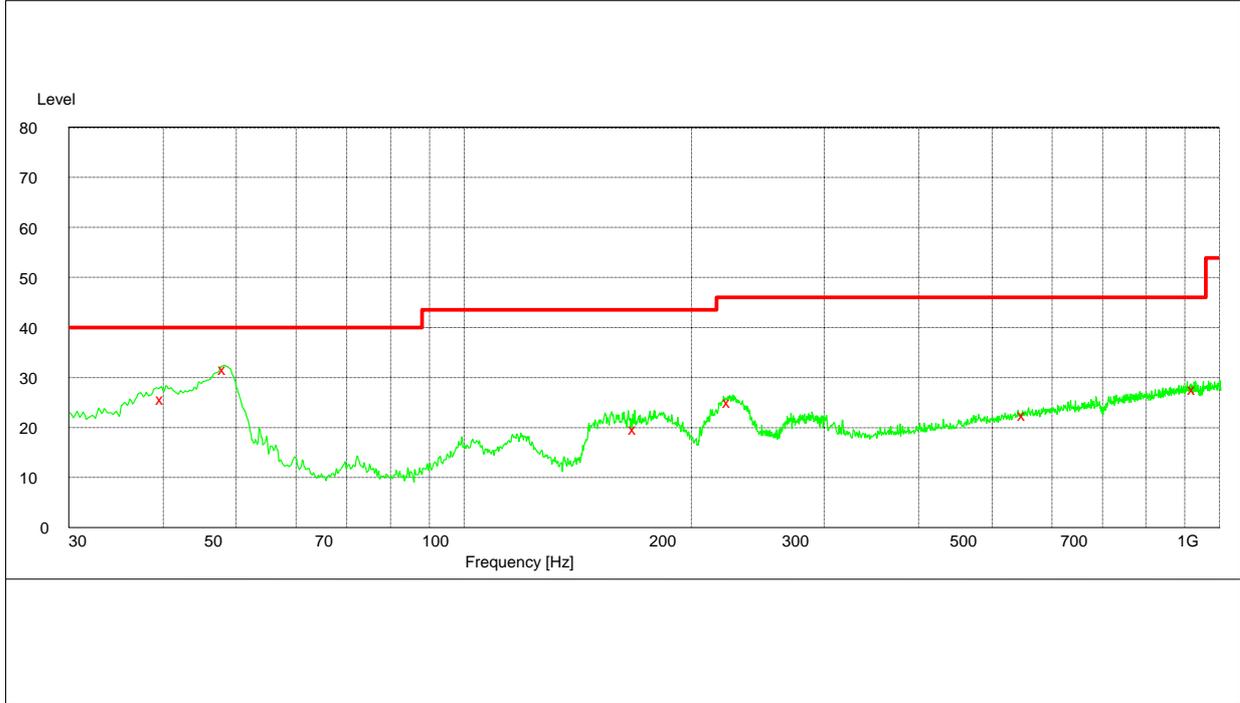

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBµV/m)	Transd (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
40.020000	25.90	-11.2	40.0	14.1	108.0	353.00	VERTICAL
48.420000	31.70	-15.4	40.0	8.3	108.0	360.00	VERTICAL
168.900000	19.90	-14.4	43.5	23.6	192.0	24.00	HORIZONTAL
225.240000	25.30	-12.5	46.0	20.7	144.0	260.00	HORIZONTAL
556.500000	22.20	-4.5	46.0	23.8	192.0	334.00	HORIZONTAL
918.780000	28.70	1.1	46.0	17.3	100.0	118.00	HORIZONTAL

XQLCHW03

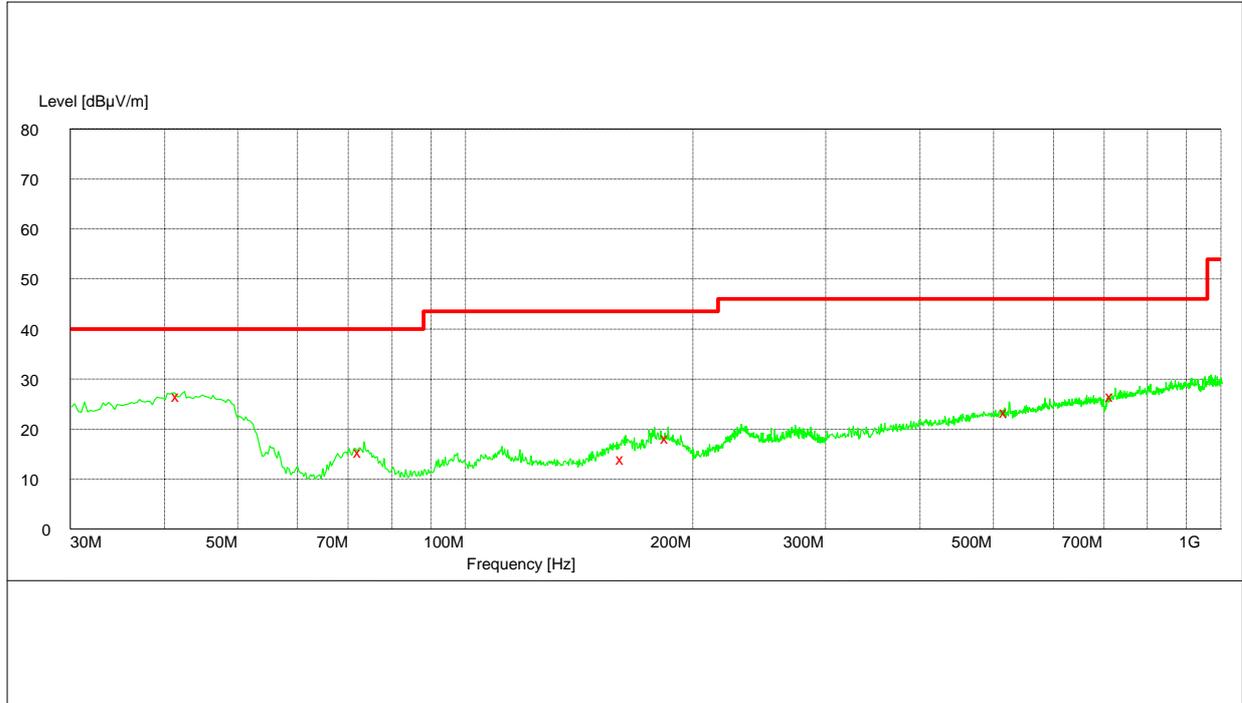

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBµV/m)	Transd (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
41.820000	27.80	-12.5	40.0	12.2	117.0	331.00	VERTICAL
72.780000	15.60	-18.5	40.0	24.4	274.0	311.00	HORIZONTAL
161.940000	14.10	-14.5	43.5	29.4	206.0	24.00	HORIZONTAL
185.520000	18.40	-14.1	43.5	25.1	153.0	337.00	HORIZONTAL
523.920000	23.50	-5.0	46.0	22.5	101.0	15.00	VERTICAL
729.180000	26.70	-1.8	46.0	19.3	127.0	49.00	VERTICAL