


Appendix G

Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109


ADAPTER TPCA-053065E

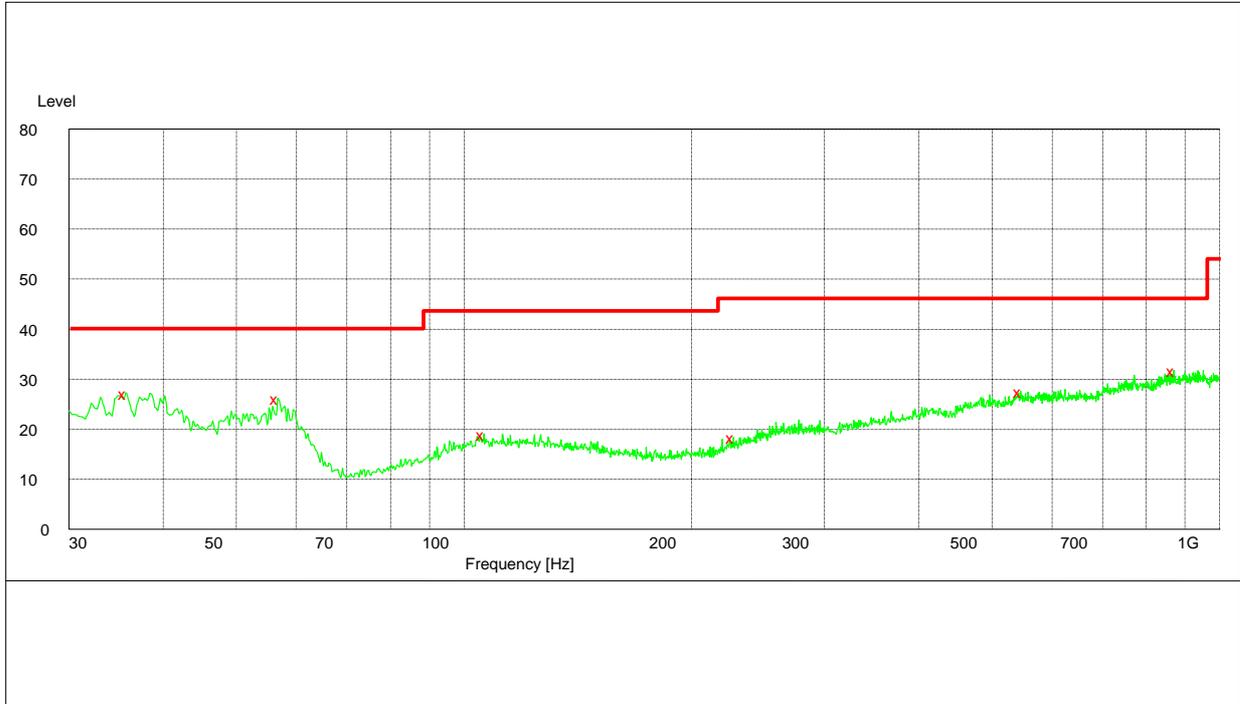

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
35.700000	27.20	-7.3	40.0	12.8	100.0	0.00	VERTICAL
56.700000	26.10	-15.8	40.0	13.9	100.0	270.00	VERTICAL
106.200000	19.00	-10.1	43.5	24.5	200.0	270.00	VERTICAL
227.400000	18.40	-10.5	46.0	27.6	200.0	180.00	HORIZONTAL
545.777778	27.60	-1.8	46.0	18.4	100.0	0.00	HORIZONTAL
870.111111	31.80	1.0	46.0	14.2	100.0	180.00	VERTICAL

ADAPTER XQLCHW03

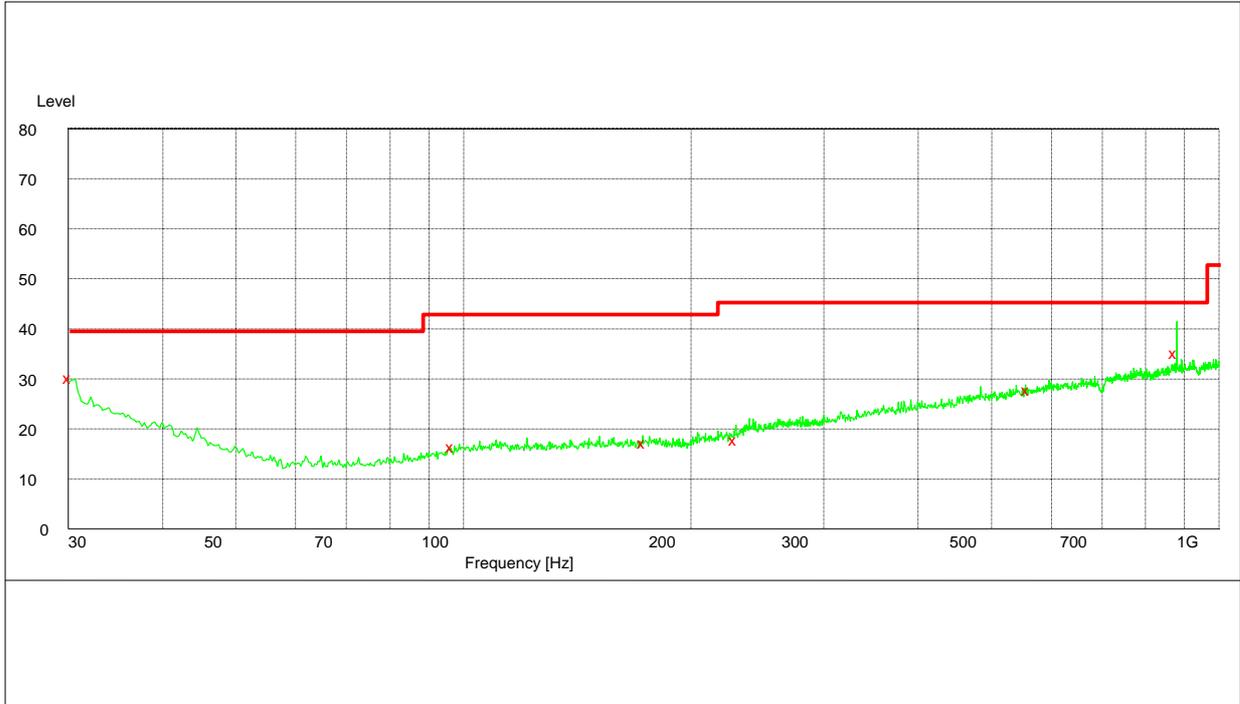

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
30.180000	30.30	-3.5	40.0	9.7	300.0	236.00	VERTICAL
96.840000	16.40	-13.9	43.5	27.1	107.0	92.00	HORIZONTAL
173.580000	17.40	-12.3	43.5	26.1	217.0	127.00	VERTICAL
229.440000	18.00	-10.5	46.0	28.0	282.0	110.00	HORIZONTAL
559.680000	27.80	-3.1	46.0	18.2	172.0	273.00	HORIZONTAL
878.160000	35.30	1.5	46.0	10.7	100.0	175.00	VERTICAL