



Appendix F. FCC CDMA2000 SAR Measurement Procedures


Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the 3.1.2.3.4.

A detailed analysis of the output power verification is provided as the table below:

Function Type	Reverse Traffic Channel	Test Mode	Radio Configuration		Service Option	Data Rates (kbps)	Power Control	Low Ch	Mid. Ch	High Ch
			Forward Traffic Channel (Fwd)	Reverse Traffic Channel (Rvs)				1013	384	777
BC0	FCH	1	1	1	55	Full	All Up	24.03	24.20	24.47
		3	3	3	55	Full	All Up	24.06	24.21	24.58

CDMA2000 Setup Configuration:

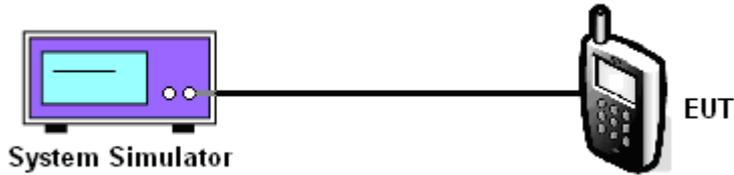

Setup Configuration

1. The EUT was connected to System Simulator, Agilent 8960. Refer to the drawing of Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and System Simulator with following setting:
 - a. For 1xRTT, set the Radio Configuration and the Service Option
 - b. For 1xEV-DO, set the Protocol Release and Data Rate
 - c. Set the Power Control to All Up Bits
4. The transmitted maximum output power was recorded.

Call Setup Screen			
Call Control	Active Cell Operating Mode		Call Parm
Close Menu	Mobile Station Information		Cell Power
	ESN (Hex):		-86.00
	ESN (Dec):		dBm/1.23 MHz
	NCC:		Cell Band
	MNC:		US PCS
	MSIN:		Channel
	Slot Class:		1175
	Slot Cycle Index: ----		Protocol Rev
	Protocol Revision:		6 (IS-2000-0)
	FCH Service Option Setup		Value
Service Option f	Service Option	S055 (Loopback)	(Fud1, Rvs1)
Service Option f	S01 (Voice)	S09 (Loopback)	S055 (Loopback)
Service Option f	S02 (Loopback)	S055 (Loopback)	FCH Service Option Setup
Service Option f	S03 (Voice)	S055 (Loopback)	
Service Option f	S06 (SIS)	S055 (Loopback)	
	S055 (Loopback)		
	S068 (Voice)		
	Active Cell	Sys Type: IS-2000	
	Idle		
	IntRef	Offset	1 of 4

1xRTT setting for Radio Configuration 1 with Service Option 55



Call Setup Screen						
Call Control	Active Cell Operating Mode				Call Parm	
Close Menu	Mobile Station Information				Cell Power	
	ESN (Hex):				-86.00	
	ESN (Dec):				dBm/1.23 MHz	
	NCC:				Cell Band	
	NMC:				US PCS	
	NSIN:				Channel	
	Slot Class:				1175	
	Slot Cycle Index: ----				Protocol Rev	
	Protocol Revision:				6 (IS-2000-0)	
	FCH Service Option Setup			Value		Radio Config
Service Option f			S055 (Loopback)		(Fud3, Rvs3)	
Service Option f			S09 (Loopback)		S055 (Loopback)	
Service Option f			S01 (Voice)		S055 (Loopback)	
Service Option f			S02 (Loopback)		S055 (Loopback)	
Service Option f			S03 (Voice)		S055 (Loopback)	
Service Option f			S06 (SIS)		S055 (Loopback)	
Service Option f			S055 (Loopback)		FCH Service Option Setup	
Service Option f			S032 (+ F-SCH)		v	
Active Cell			Sys Type: IS-2000			
Idle						
IntRef			Offset		1 of 4	

1xRTT setting for Radio Configuration 3 with Service Option 55

Reference:

- [1] SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA, June 2006 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2] 3.1.2.3.4 Maximum RF Output Power 3GPP2 C.S0033-0 Version 2.0, Date: 12 December 2003 Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access Terminal