

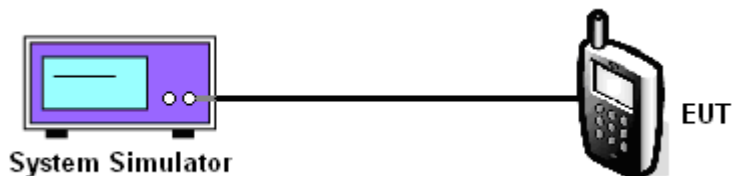
Appendix F. FCC CDMA2000 SAR Measurement Procedures

Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the 3.1.2.3.4.

A detailed analysis of the output power verification is provided as the table below:

Function Type	Reverse Traffic Channel	Test Mode	Radio Configuration		Service Option	Data Rates (kbps)	Power Control	Low Ch	Mid. Ch	High Ch
			Forward Traffic Channel (Fwd)	Reverse Traffic Channel (Rvs)				1013	384	777
CDMA2000 Cellular	FCH	1	1	1	55	Full	All Up	24.02	23.96	24.06
		3	3	3	55	Full	All Up	24.12	24.01	24.15

CDMA2000 Setup Configuration:

Setup Configuration

1. The EUT was connected to System Simulator, Agilent 8960. Refer to the drawing of Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and System Simulator with following setting:
 - a. For 1xRTT, set the Radio Configuration and the Service Option
 - b. Set the Power Control to All Up Bits
4. The transmitted maximum output power was recorded.

Call Setup Screen			
Call Control	Active Cell Operating Mode		Call Params
Close Menu	Mobile Station Information ESN (Hex): ESN (Dec): MCC: MNC: MSIN: Slot Class: Slot Cycle Index: ---- Protocol Revision:		Cell Power -86.00 dBm/1.23 MHz Cell Band US PCS Channel 1175
	FCH Service Option Setup		Value
	Service Option for Fud1, Rvs1	Service Option	S055 (Loopback)
	Service Option for Fud1, Rvs1	S01 (Voice)	S09 (Loopback)
	Service Option for Fud1, Rvs1	S02 (Loopback)	S055 (Loopback)
	Service Option for Fud1, Rvs1	S03 (Voice)	S055 (Loopback)
	Service Option for Fud1, Rvs1	S06 (SMS)	S055 (Loopback)
	Service Option for Fud1, Rvs1	S055 (Loopback)	
	Service Option for Fud1, Rvs1	S068 (Voice)	
			Radio Config (Fud1, Rvs1) S055 (Loopback)
			FCH Service Option Setup
	Active Cell	Sys Type: IS-2000	
	Idle		
	IntRef	Offset	1 of 4

1xRTT setting for Radio Configuration 1 with Service Option 55



Call Setup Screen									
Call Control		Active Cell Operating Mode						Call Params	
		Mobile Station Information						Cell Power	
		ESN (Hex):						-86.00	
		ESN (Dec):						dBm/1.23 MHz	
		NCC:						Cell Band	
		NMC:						US PCS	
		NSIN:						Channel	
		Slot Class:						1175	
		Slot Cycle Index: ----						Protocol Rev	
		Protocol Revision:						6 (IS-2000-0)	
		Close Menu		FCH Service Option Setup				Value	
		Service Option for Fud3, Rvs3				S055 (Loopback)		S055 (Loopback)	
		Service Option for S01 (Voice)				S09 (Loopback)		S055 (Loopback)	
		Service Option for S02 (Loopback)				S055 (Loopback)		S055 (Loopback)	
		Service Option for S03 (Voice)				S055 (Loopback)		S055 (Loopback)	
		Service Option for S06 (SIS)				S055 (Loopback)		S055 (Loopback)	
		S055 (Loopback)						FCH Service Option Setup	
		S032 (+ F-SCH)							
		Active Cell				Sys Type: IS-2000			
		Idle							
		IntRef Offset						1 of 4	

1xRTT setting for Radio Configuration 3 with Service Option 55



Reference:

- [1] SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA, June 2006
Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2] 3.1.2.3.4 Maximum RF Output Power 3GPP2 C.S0033-0 Version 2.0, Date: 12 December 2003
Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access
Terminal