


FCC Test Report

APPLICANT : HUAWEI TECHNOLOGIES CO., LTD.
EQUIPMENT : CDMA 1X Digital Mobile Phone
BRAND NAME : HUAWEI
MODEL NAME : HUAWEI C6005
FCC ID : QISC6005
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Mar. 28, 2011 and completely tested on Apr. 13, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

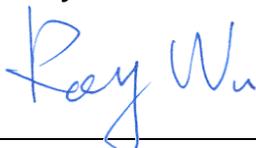

Roy Wu / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : QISC6005

Page Number : 1 of 21

Report Issued Date : May 13, 2011

Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant 5

 1.2. Manufacturer 5

 1.3. Feature of Equipment Under Test 5

 1.4. Test Site 6

 1.5. Applied Standards 6

 1.6. Ancillary Equipment List 6

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 7

 2.1. Test Mode 7

 2.2. Connection Diagram of Test System 9

 2.3. Test Software 10

3. TEST RESULT 11

 3.1. Test of AC Conducted Emission Measurement 11

 3.2. Test of Radiated Emission Measurement 15

4. LIST OF MEASURING EQUIPMENT 19

5. UNCERTAINTY OF EVALUATION 20

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FD132822	Rev. 01	Initial issue of report	May 13, 2011



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	7.2.2	AC Conducted Emission	< 15.107 limits < RSS-Gen table 2 limits	PASS	Under limit 12.3 dB at 0.53 MHz
3.2	15.109	7.2.3.2	Radiated Emission	< 15.109 limits or < RSS-Gen table 1 limits (Section 6)	PASS	Under limit 3.06 dB at 33.24 MHz



1. General Description

1.1. Applicant

HUAWEI TECHNOLOGIES CO., LTD.

Huawei Industrial Base, Bantian, Longgang, Shenzhen, P.R China

1.2. Manufacturer

HUAWEI TECHNOLOGIES CO., LTD.

Huawei Industrial Base, Bantian, Longgang, Shenzhen, P.R China

1.3. Feature of Equipment Under Test

Product Feature & Specification	
Equipment	CDMA 1X Digital Mobile Phone
Brand Name	HUAWEI
Model Name	HUAWEI C6005
FCC ID	QISC6005
Tx Frequency Range	824 MHz ~ 849 MHz
Rx Frequency Range	869 MHz ~ 894 MHz
Antenna Type	Fixed Internal Antenna
HW Version	Ver.A
SW Version	C6005C49B301
Type of Modulation	QPSK
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4. Test Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	CO05-HY	03CH05-HY	722060/4086B-1

1.5. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003
- IC RSS-Gen Issue 3

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.6. Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	PC	DELL	MT320	FCC DoC	N/A	Unshielded, 1.8 m
3.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	(USB)Mouse	DELL	MO56UC	FCC DoC	Shielded, 1.8 m	N/A
5.	(USB)Keyboard	DELL	L100	FCC DoC	Shielded, 1.8 m with core	N/A
6.	Monitor	DELL	E1910Hc	FCC DoC	Shielded, 1.2 m	Unshielded, 1.8 m
7.	Printer	HP	Laser Jet 1018	FCC DoC	Shielded, 1.8 m	Unshielded, 1.8 m
8.	LCD Monitor	Lenovo	6135-AB1	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
9.	iPod	Apple	A1199	FCC DoC	Unshielded, 1.2 m	N/A
10.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0 m	N/A

2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	☒	☒	Note 1
2.	Charging Mode (EUT with PC)	☒	Note 1	Note 1
3.	Charging Mode (EUT with notebook)	Note 1	☒	☒

Abbreviations:


- EMI AC: AC conducted emissions
- EMI RE ≥ 1G: EUT radiated emissions ≥ 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

Note 1: Testing for this mode is not required or not the worst case.


Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	Mode 1 : CDMA2000 BC0 Idle + Adapter 1 + Earphone + FM Rx Mode 2 : CDMA2000 BC0 Idle + Adapter 1 + Earphone + MP3 Mode 3 : CDMA2000 BC0 Idle + Adapter 2 + Earphone + FM Rx Mode 4 : CDMA2000 BC0 Idle + Earphone + USB Cable (Link with PC)
Radiated Emissions < 1GHz	1/3	Mode 1 : CDMA2000 BC0 Idle + Adapter 1 + Earphone + FM Rx Mode 2 : CDMA2000 BC0 Idle + Adapter 1 + Earphone + MP3 Mode 3 : CDMA2000 BC0 Idle + Adapter 2 + Earphone + FM Rx Mode 4 : CDMA2000 BC0 Idle + Earphone + USB Cable (Link with Notebook)
Radiated Emissions ≥ 1GHz	3	Mode 1 : CDMA2000 BC0 Idle + Earphone + USB Cable (Link with Notebook)
<p>Remark:</p> <ol style="list-style-type: none"> 1. The worst case of AC is mode 3; only the test data of this mode was reported. 2. The worst case of RE < 1G is mode 4; only the test data of this mode was reported. 		

2.2. Connection Diagram of Test System


<EUT with Adapter Mode>

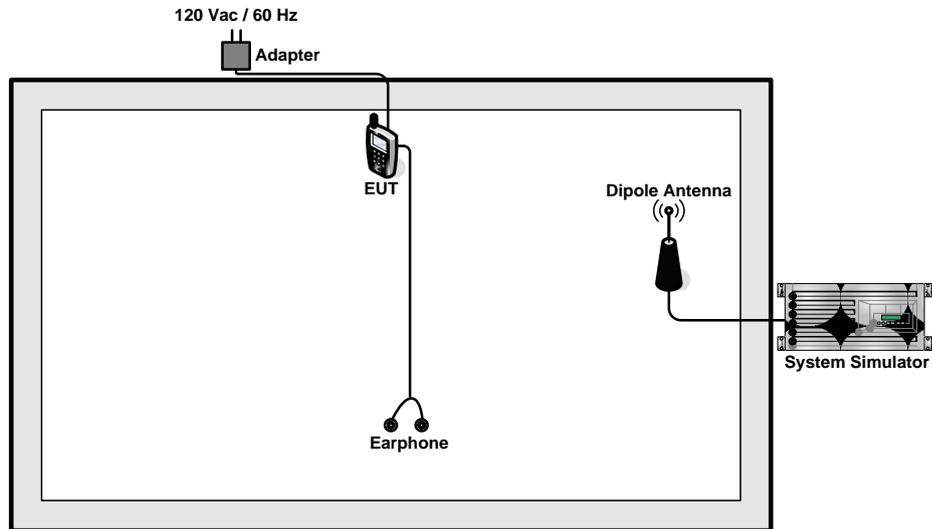

<EUT with USB Cable (Link with PC) Mode>

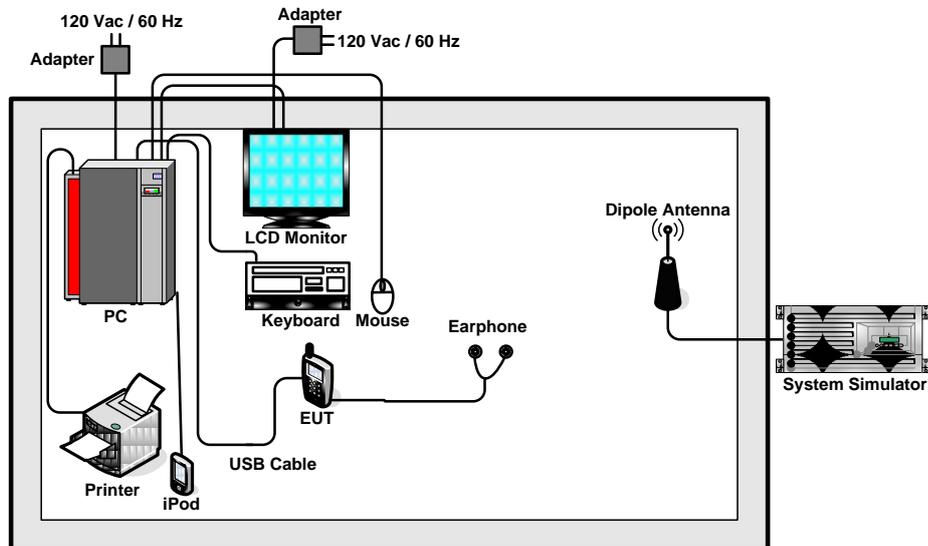

<EUT with USB Cable (Link with Notebook) Mode>

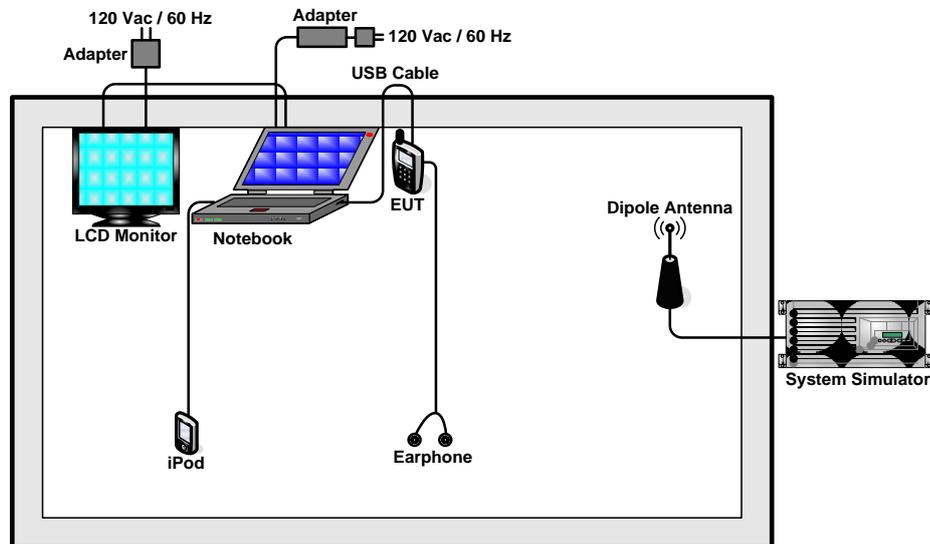

2.3. Test Software

The EUT was in CDMA2000 idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the following programs installed in the EUT were programmed during the test.

1. Execute the program, "Winthrax", installed in notebook or PC for active sync files transfer with EUT via USB cable.
2. Execute "Music Player" to play MP3 file.

3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.1.4 Test Setup

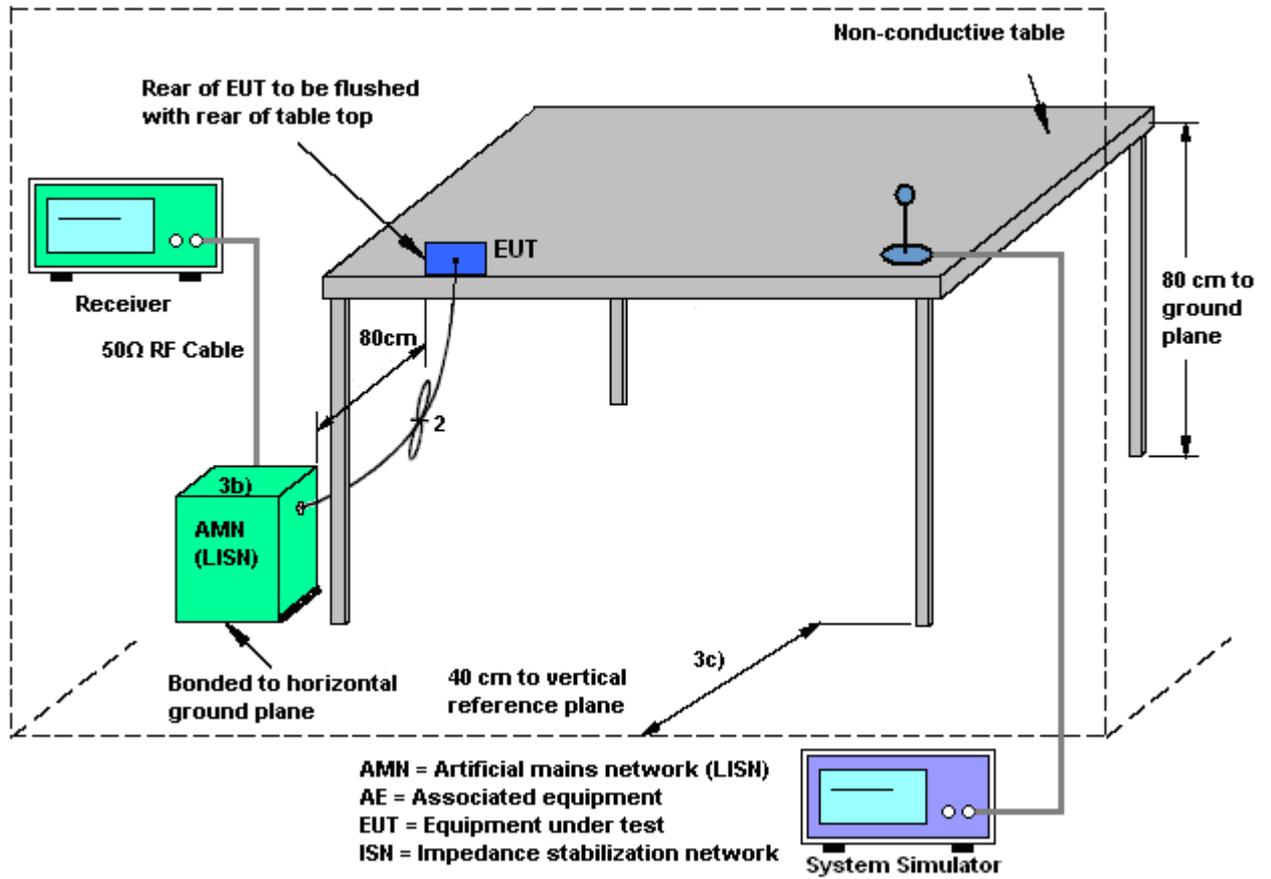

3.1.5 Test Result of AC Conducted Emission

Test Mode :	Mode 3	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	CDMA2000 BC0 Idle + Adapter 2 + Earphone + FM Rx		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

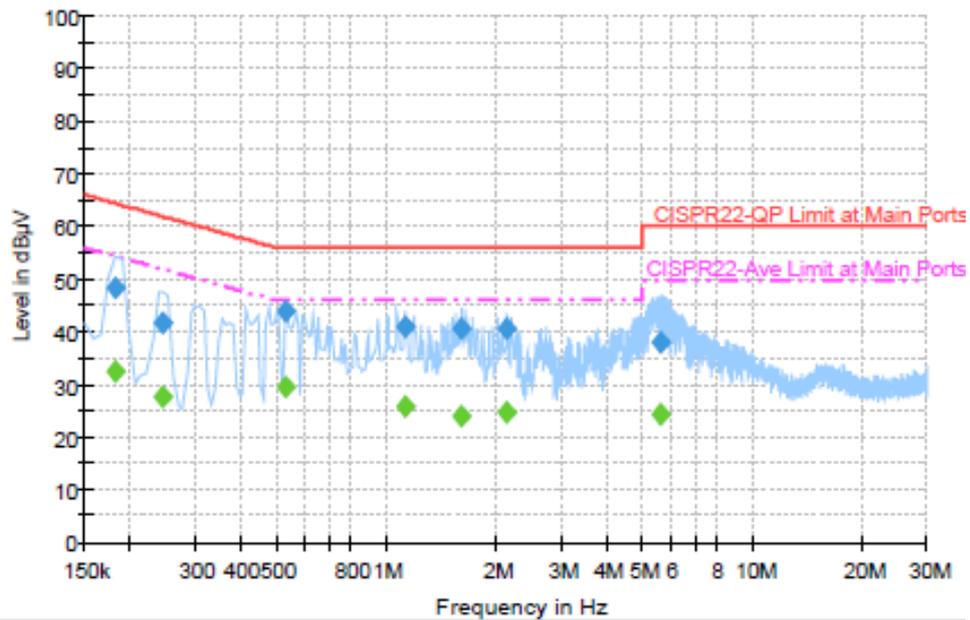


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	48.5	Off	L1	19.4	15.9	64.4
0.246000	41.5	Off	L1	19.4	20.4	61.9
0.534000	43.7	Off	L1	19.4	12.3	56.0
1.126000	41.0	Off	L1	19.4	15.0	56.0
1.606000	40.4	Off	L1	19.4	15.6	56.0
2.134000	40.6	Off	L1	19.4	15.4	56.0
5.598000	38.2	Off	L1	19.5	21.8	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.182000	32.3	Off	L1	19.4	22.1	54.4
0.246000	27.9	Off	L1	19.4	24.0	51.9
0.534000	29.6	Off	L1	19.4	16.4	46.0
1.126000	25.9	Off	L1	19.4	20.1	46.0
1.606000	24.0	Off	L1	19.4	22.0	46.0
2.134000	24.8	Off	L1	19.4	21.2	46.0
5.598000	24.4	Off	L1	19.5	25.6	50.0

Test Mode :	Mode 3	Temperature :	20~22°C
Test Engineer :	Novic Chiang	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	CDMA2000 BC0 Idle + Adapter 2 + Earphone + FM Rx		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

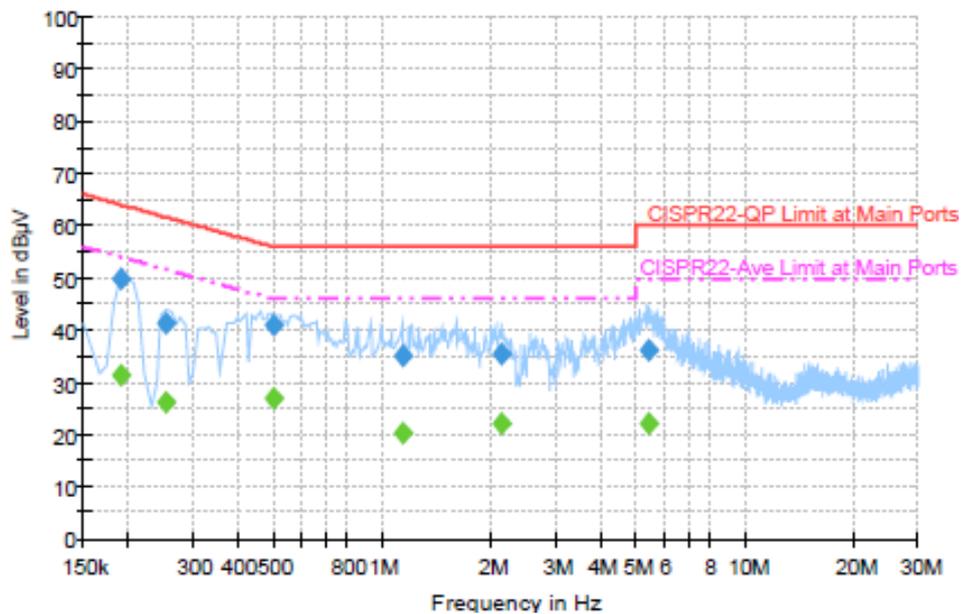

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	50.0	Off	N	19.4	14.0	64.0
0.254000	41.5	Off	N	19.4	20.1	61.6
0.502000	40.8	Off	N	19.4	15.2	56.0
1.134000	34.9	Off	N	19.5	21.1	56.0
2.134000	35.4	Off	N	19.5	20.6	56.0
5.406000	36.1	Off	N	19.5	23.9	60.0

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.190000	31.5	Off	N	19.4	22.5	54.0
0.254000	26.3	Off	N	19.4	25.3	51.6
0.502000	27.1	Off	N	19.4	18.9	46.0
1.134000	20.3	Off	N	19.5	25.7	46.0
2.134000	22.3	Off	N	19.5	23.7	46.0
5.406000	22.1	Off	N	19.5	27.9	50.0



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3


3.2.2. Measuring Instruments

See list of measuring instruments of this test report.

3.2.3. Test Procedures

1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the quasi-peak method and reported
8. Emission level (dBuV/m) = 20 log Emission level (uV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


3.2.4. Test Setup of Radiated Emission

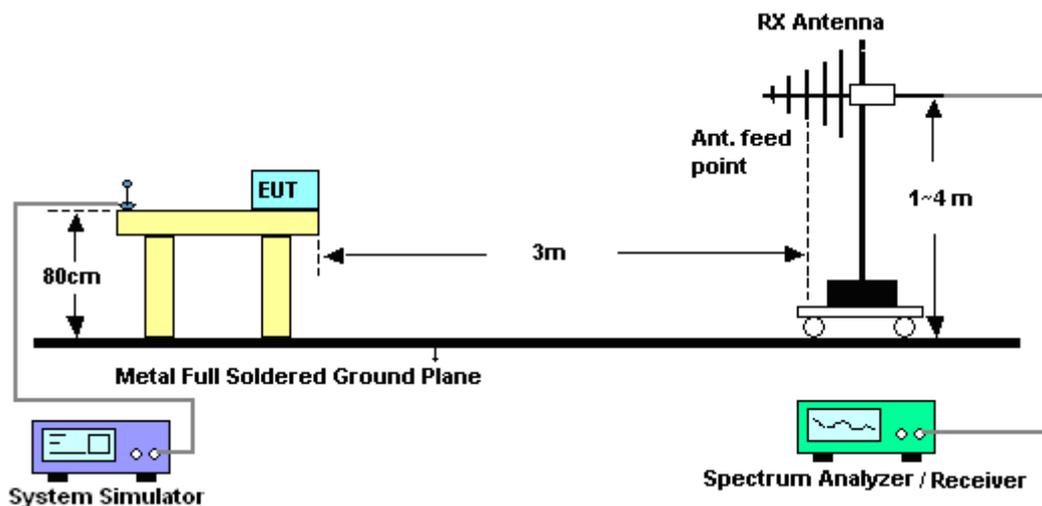



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 4	Temperature :	22~23°C
Test Engineer :	David Yang	Relative Humidity :	47~50%
Test Distance :	3m	Polarization :	Horizontal
Function Type :	CDMA2000 BC0 Idle + Earphone + USB Cable (Link with Notebook)		
Remark :	#7 is System Simulator Signal which can be ignored.		

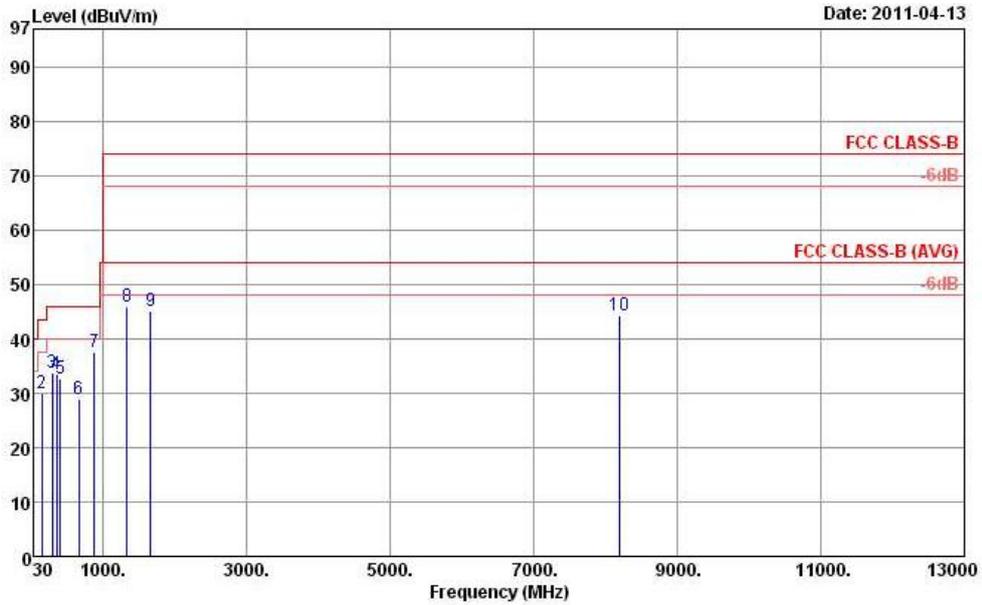


Site : 03CH05-HY
 Condition : FCC CLASS-B HF_ANT_100824 HORIZONTAL
 Project : FD 132822
 Power : From System
 Mode : Mode 4

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB	cm	deg
1	33.24	36.94	-3.06	40.00	51.27	16.63	0.58	31.54	156	317 Peak
2	144.21	30.02	-13.48	43.50	49.89	10.50	1.14	31.51	---	---
3	294.06	33.90	-12.10	46.00	51.55	12.10	1.55	31.30	---	---
4	349.70	33.59	-12.41	46.00	49.72	13.47	1.71	31.31	---	---
5	401.50	32.71	-13.29	46.00	47.27	14.80	1.82	31.18	---	---
6	664.00	29.02	-16.98	46.00	38.49	18.99	2.30	30.76	---	---
7	881.70	37.61			43.78	21.64	2.68	30.49	---	---
8	1332.00	46.00	-28.00	74.00	72.78	27.94	3.63	58.35	100	0 Peak
9	1666.00	45.22	-28.78	74.00	70.43	29.10	3.72	58.03	100	0 Peak
10	8204.00	44.39	-29.61	74.00	57.46	35.26	8.90	57.23	123	174 Peak



Test Mode :	Mode 4	Temperature :	22~23°C
Test Engineer :	David Yang	Relative Humidity :	47~50%
Test Distance :	3m	Polarization :	Vertical
Function Type :	CDMA2000 BC0 Idle + Earphone + USB Cable (Link with Notebook)		
Remark :	#7 is System Simulator Signal which can be ignored.		

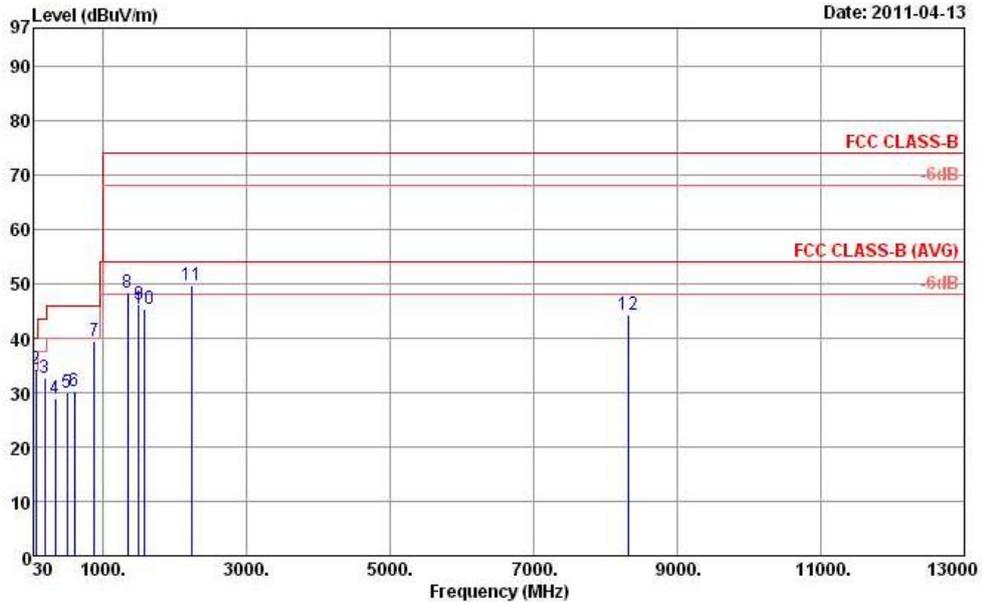

Site : 03CH05-HY
 Condition : FCC CLASS-B HF_ANT_100824 VERTICAL
 Project : FD 132822
 Power : From System
 Mode : Mode 4

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	cm	deg
1	32.97	36.85	-3.15	40.00	51.18	16.63	0.58	31.54	100	309 Peak
2	66.45	34.27	-5.73	40.00	59.40	5.65	0.73	31.51	---	---
3	190.92	32.77	-10.73	43.50	54.69	8.33	1.23	31.48	---	---
4	331.50	28.90	-17.10	46.00	45.58	12.99	1.63	31.30	---	---
5	498.10	29.99	-16.01	46.00	41.99	17.04	2.04	31.08	---	---
6	597.50	30.30	-15.70	46.00	40.30	18.67	2.20	30.87	---	---
7	881.70	39.56			45.73	21.64	2.68	30.49	---	---
8	1348.00	48.49	-25.51	74.00	75.28	27.94	3.62	58.35	100	0 Peak
9	1496.00	46.17	-27.83	74.00	72.81	28.00	3.55	58.19	100	0 Peak
10	1572.00	45.29	-28.71	74.00	71.23	28.55	3.62	58.11	100	0 Peak
11	2246.00	49.81	-24.19	74.00	71.68	31.54	4.32	57.73	100	0 Peak
12	8318.00	44.28	-29.72	74.00	57.06	35.24	9.06	57.08	100	93 Peak

4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
EMI Test Receive	R&S	ESCS 30	100356	9KHz – 2.75GHz	Aug. 16, 2010	Aug. 15, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9KHz – 30MHz	Dec. 03, 2010	Dec. 02, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9KHz – 30MHz	Dec. 01, 2010	Nov. 30, 2011	Conduction (CO05-HY)
AC Power Source	APC	APC-1000W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
Spectrum Analyzer	R&S	FSP30	101352	9KHz-40GHz	Nov. 03, 2010	Nov. 02, 2011	Radiation (03CH05-HY)
Amplifier	COM-POWER	PA-103	161075	1KHz - 1GHz	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30MHz ~ 1GHz	Nov. 06, 2010	Nov. 05, 2011	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 18, 2010	Oct. 17, 2011	Radiation (03CH05-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz- 26.5GHz	Apr. 15, 2010	Apr. 14, 2011	Radiation (03CH05-HY)
Turn Table	HD	Deis HD 2000	420/611	0 - 360 degree	N/A	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	MA 240	240/666	1 m - 4 m	N/A	N/A	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	00066584	1GHz ~ 18GHz	Aug. 05, 2010	Aug. 04, 2011	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH05-HY)
System Simulator	R&S	CMU200	117591	N/A	Oct. 18, 2010	Oct. 17, 2011	-

5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
Combined Standard Uncertainty $Uc(y)$	1.13		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26		

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $Uc(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.54		



Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				