




Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

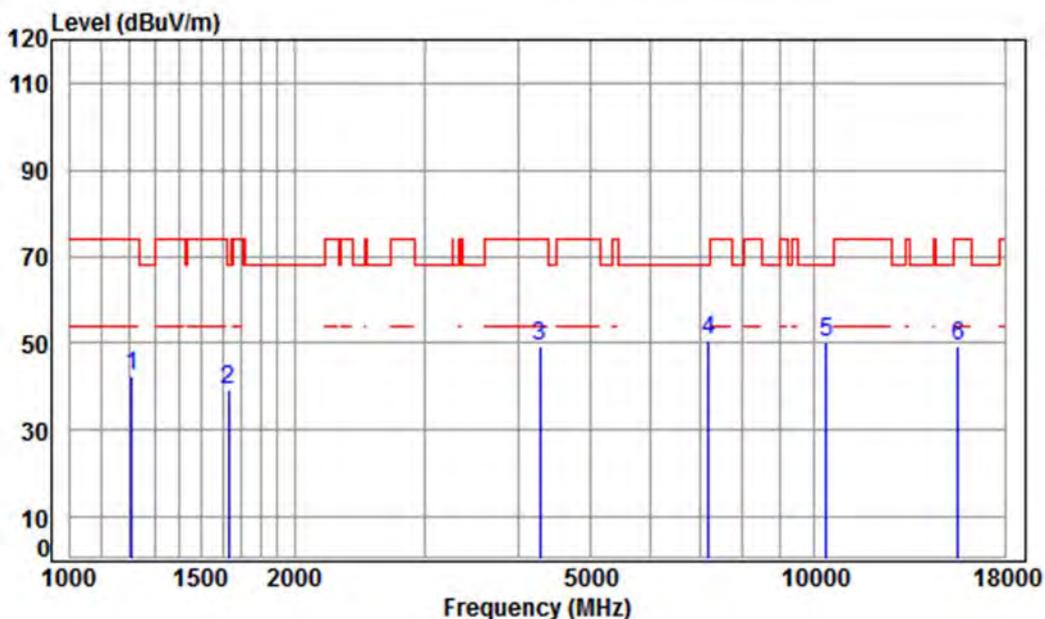

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 TX RSE

: Ant 2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	52.03	42.32	74.00	-31.68	peak
2	1629.825	5.31	26.38	38.70	46.28	39.27	68.20	-28.93	peak
3	4279.589	7.31	33.60	38.13	46.37	49.15	74.00	-24.85	peak
4 pp	7200.309	10.08	36.42	38.22	42.14	50.42	68.20	-17.78	peak
5	10380.000	11.21	37.22	36.34	37.92	50.01	68.20	-18.19	peak
6	15570.000	14.35	41.37	38.10	31.62	49.24	74.00	-24.76	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 95 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

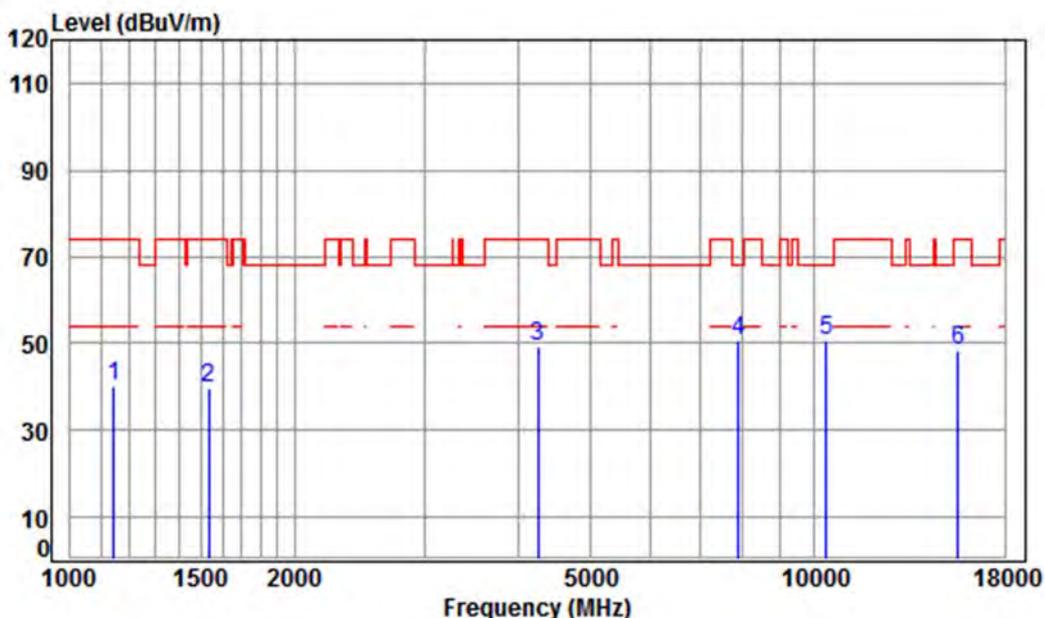

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5190 TX RSE

: Ant 2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	50.59	40.29	74.00	-33.71 peak
2	1533.841	5.44	25.96	38.70	47.20	39.90	74.00	-34.10 peak
3	4254.921	7.28	33.60	38.13	46.62	49.37	74.00	-24.63 peak
4	7898.049	9.96	36.54	38.29	42.37	50.58	68.20	-17.62 peak
5	pp10380.000	11.21	37.22	36.34	38.69	50.78	68.20	-17.42 peak
6	15570.000	14.35	41.37	38.10	30.74	48.36	74.00	-25.64 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

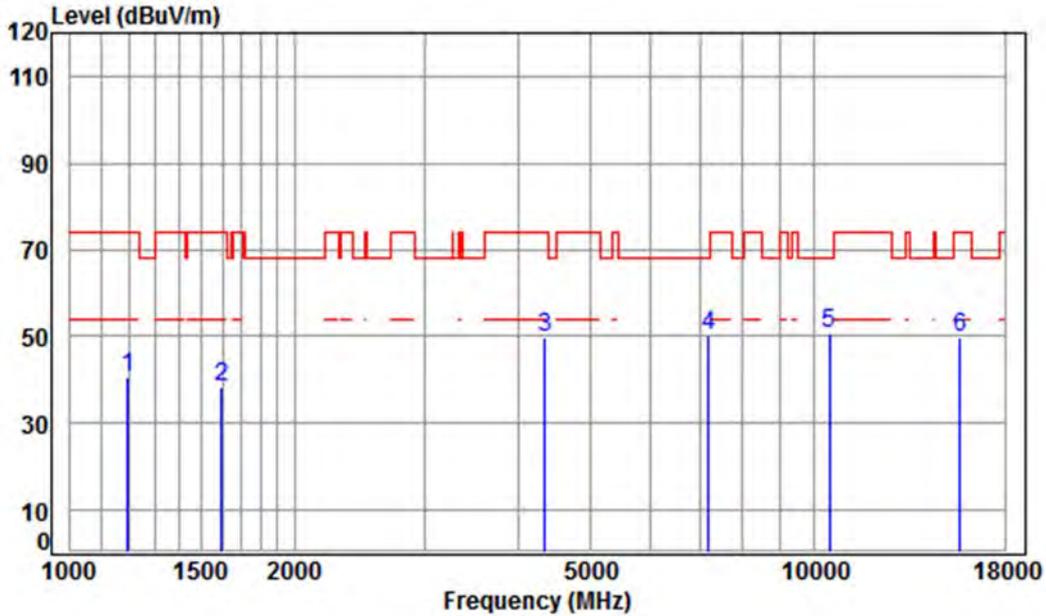

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5230 TX RSE

: Ant 2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	50.67	40.83	74.00	-33.17	peak
2	1597.181	5.35	26.24	38.70	45.64	38.53	74.00	-35.47	peak
3	4341.886	7.38	33.60	38.14	46.80	49.64	74.00	-24.36	peak
4	7200.309	10.08	36.42	38.22	42.03	50.31	68.20	-17.89	peak
5	pp10460.000	11.26	37.14	36.35	38.39	50.44	68.20	-17.76	peak
6	15690.000	14.53	41.32	38.01	32.09	49.93	74.00	-24.07	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

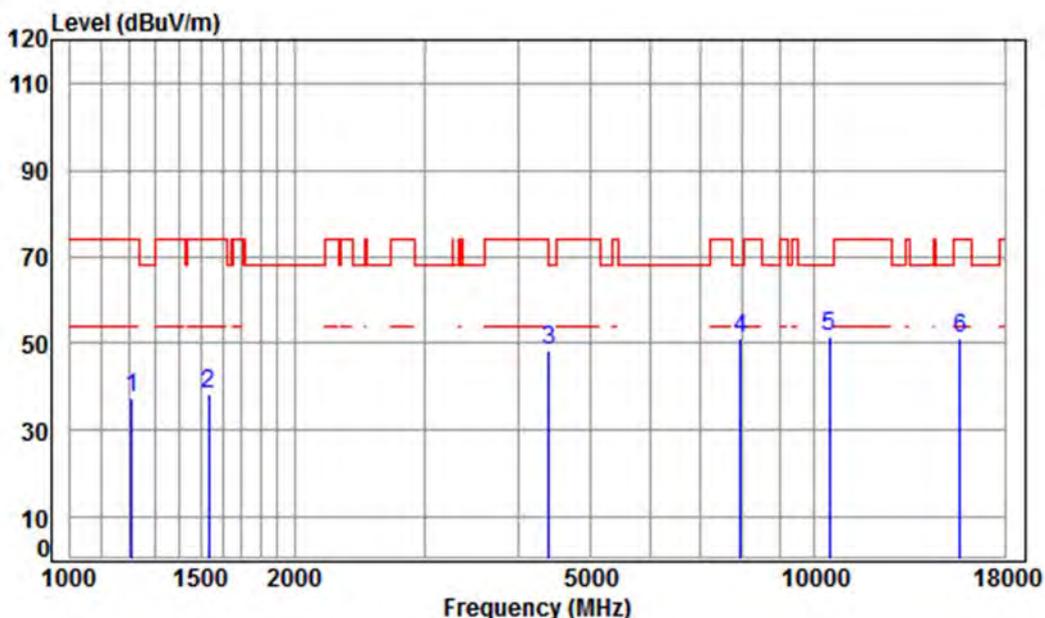

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5230 TX RSE

: Ant 2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	46.96	37.25	74.00	-36.75	peak
2	1533.841	5.44	25.96	38.70	45.48	38.18	74.00	-35.82	peak
3	4392.376	7.44	33.60	38.14	45.43	48.33	74.00	-25.67	peak
4	7943.838	9.96	36.57	38.29	42.86	51.10	68.20	-17.10	peak
5	pp10460.000	11.26	37.14	36.35	39.39	51.44	68.20	-16.76	peak
6	15690.000	14.53	41.32	38.01	33.07	50.91	74.00	-23.09	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

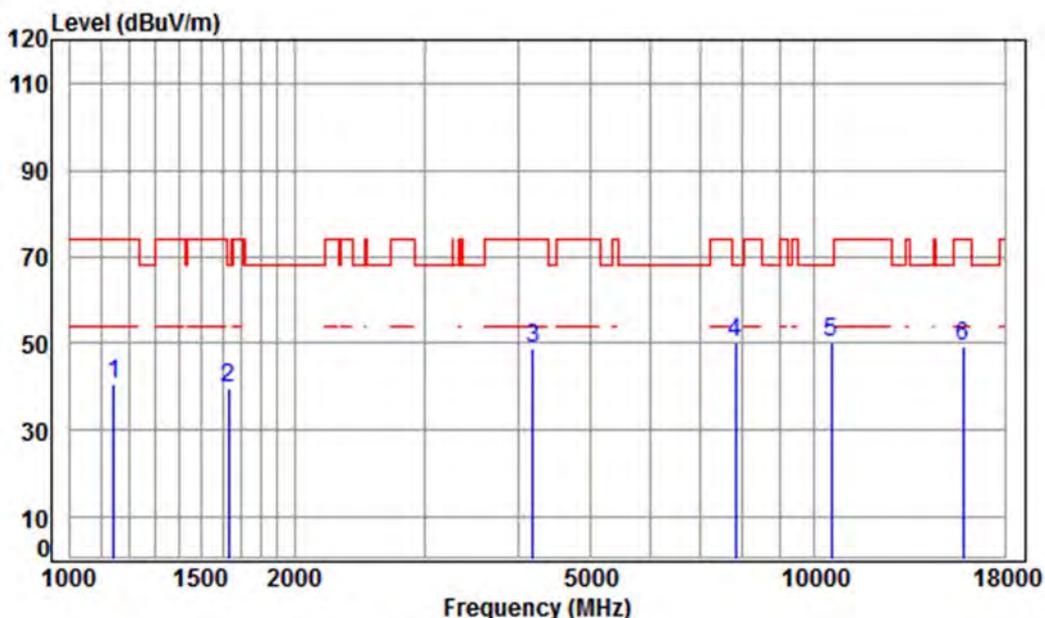

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5270 TX RSE

: Ant 2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.89	40.59	74.00	-33.41 peak
2	1629.825	5.31	26.38	38.70	46.69	39.68	68.20	-28.52 peak
3	4181.768	7.20	33.60	38.12	46.07	48.75	74.00	-25.25 peak
4 pp	7829.860	9.97	36.50	38.28	42.21	50.40	68.20	-17.80 peak
5	10540.000	11.32	37.15	36.36	38.19	50.30	68.20	-17.90 peak
6	15810.000	14.71	41.28	37.93	31.20	49.26	74.00	-24.74 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

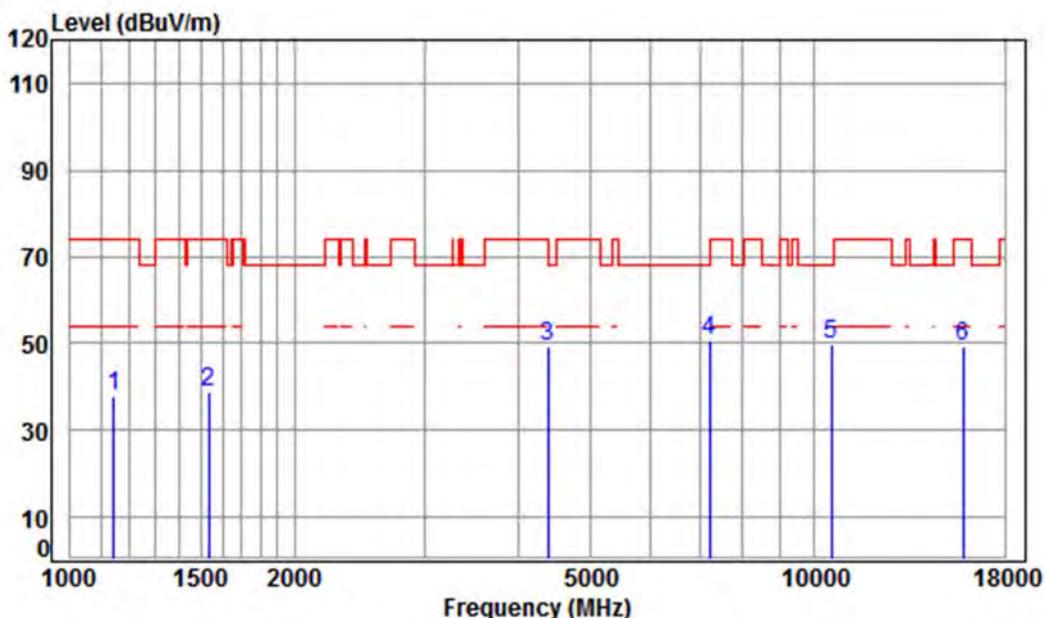

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5270 TX RSE

: Ant 2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.28	37.98	74.00	-36.02	peak
2	1533.841	5.44	25.96	38.70	46.01	38.71	74.00	-35.29	peak
3	4379.699	7.43	33.60	38.14	46.61	49.50	74.00	-24.50	peak
4 pp	7221.150	10.07	36.41	38.22	42.33	50.59	68.20	-17.61	peak
5	10540.000	11.32	37.15	36.36	37.63	49.74	68.20	-18.46	peak
6	15810.000	14.71	41.28	37.93	31.01	49.07	74.00	-24.93	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

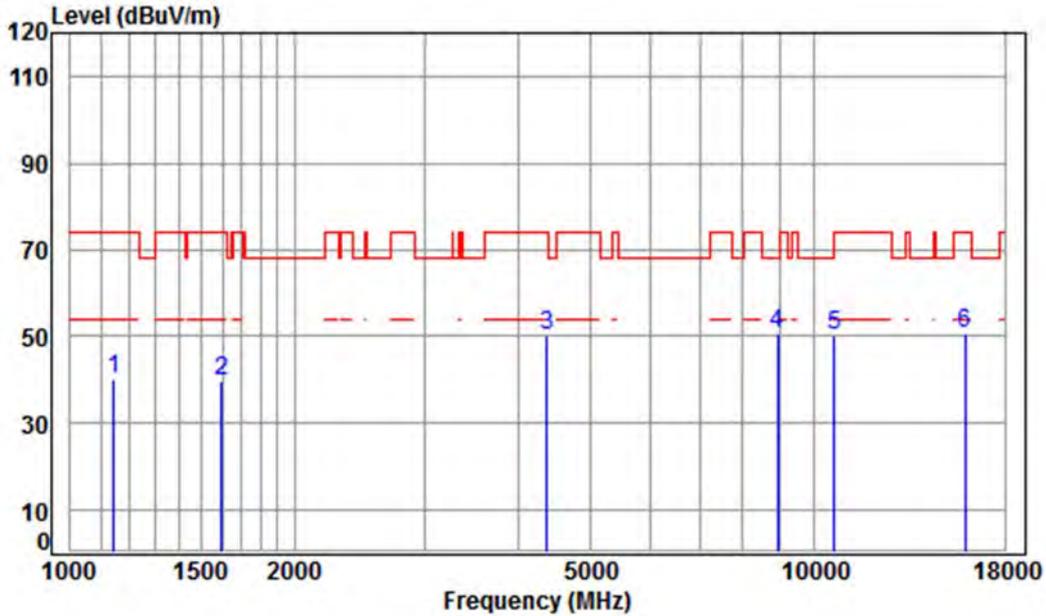

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5310 TX RSE

: Ant 2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	50.59	40.29	74.00	-33.71 peak
2	1597.181	5.35	26.24	38.70	46.62	39.51	74.00	-34.49 peak
3	4367.058	7.41	33.60	38.14	47.41	50.28	74.00	-23.72 peak
4 pp	8917.462	10.38	36.50	38.21	41.78	50.45	68.20	-17.75 peak
5	10620.000	11.37	37.25	36.36	38.09	50.35	74.00	-23.65 peak
6	15930.000	14.89	41.23	37.85	32.26	50.53	74.00	-23.47 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

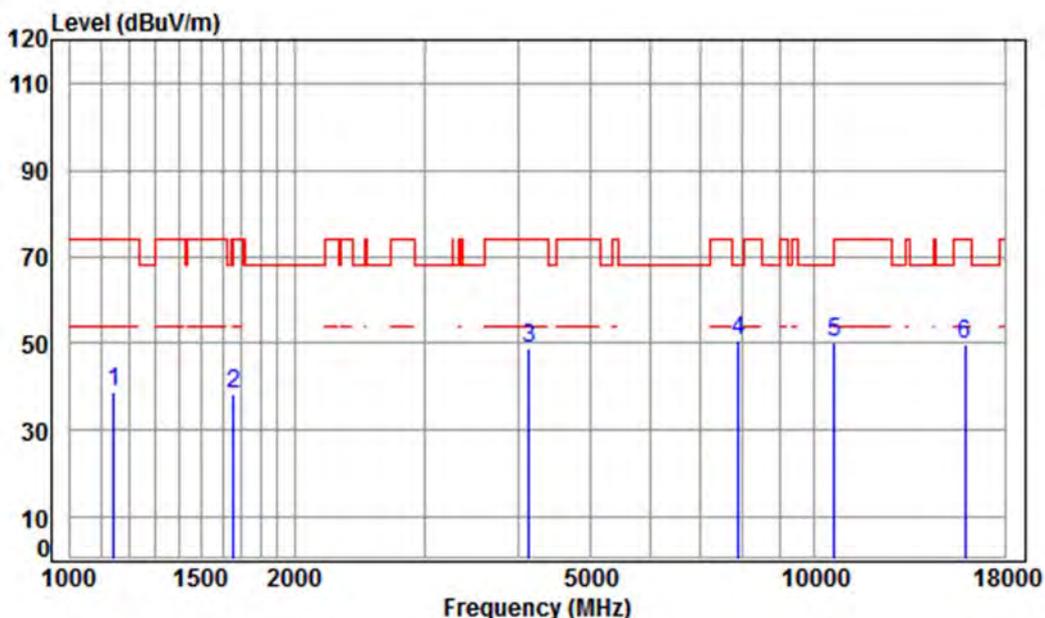

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5310 TX RSE

: Ant 2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.15	38.85	74.00	-35.15	peak
2	1658.337	5.28	26.50	38.70	45.22	38.30	68.20	-29.90	peak
3	4133.699	7.14	33.60	38.11	46.42	49.05	74.00	-24.95	peak
4 pp	7898.049	9.96	36.54	38.29	42.26	50.47	68.20	-17.73	peak
5	10620.000	11.37	37.25	36.36	37.83	50.09	74.00	-23.91	peak
6	15930.000	14.89	41.23	37.85	31.54	49.81	74.00	-24.19	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

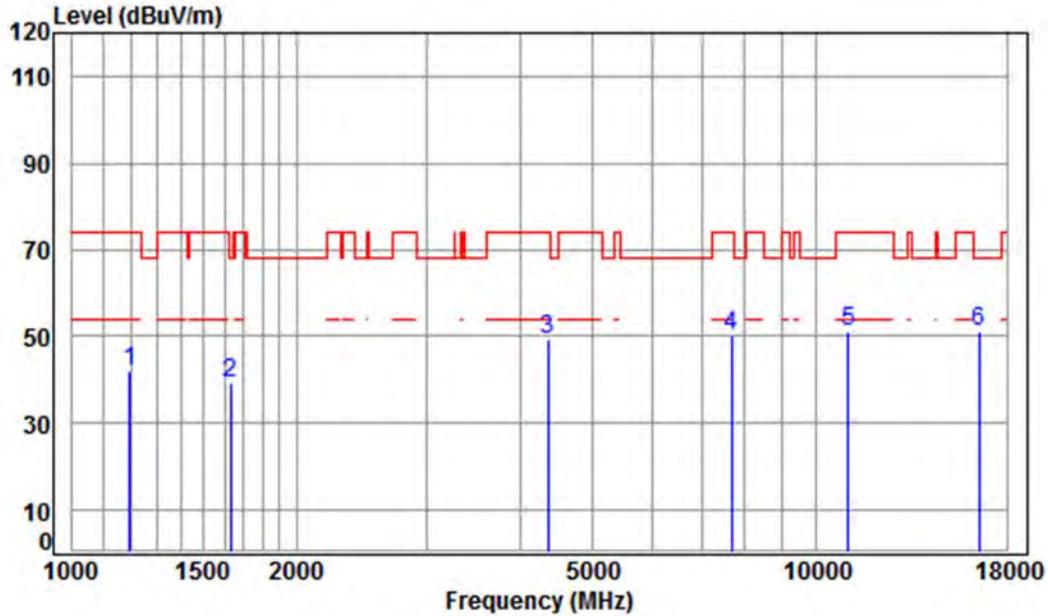

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 TX RSE

: Ant 2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	51.82	41.98	74.00	-32.02 peak
2	1634.543	5.31	26.40	38.70	46.37	39.38	68.20	-28.82 peak
3	4354.454	7.40	33.60	38.14	46.56	49.42	74.00	-24.58 peak
4	7695.244	9.98	36.42	38.27	42.23	50.36	74.00	-23.64 peak
5	11020.000	11.65	37.72	36.41	38.14	51.10	74.00	-22.90 peak
6	pp16530.000	14.63	42.71	38.02	31.62	50.94	68.20	-17.26 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 103 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

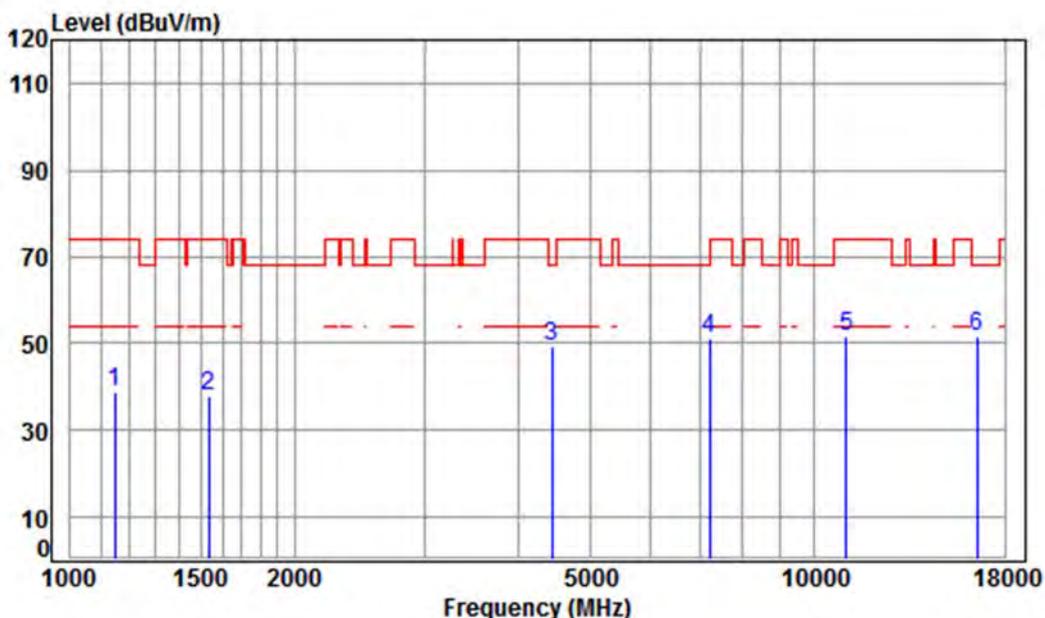

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5510 TX RSE

: Ant 2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1148.823	4.21	24.22	38.70	49.23	38.96	74.00	-35.04	peak
2	1533.841	5.44	25.96	38.70	45.28	37.98	74.00	-36.02	peak
3	4430.628	7.48	33.60	38.15	46.16	49.09	68.20	-19.11	peak
4	7221.150	10.07	36.41	38.22	43.02	51.28	68.20	-16.92	peak
5	11020.000	11.65	37.72	36.41	38.54	51.50	74.00	-22.50	peak
6	pp16530.000	14.63	42.71	38.02	32.01	51.33	68.20	-16.87	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Vertical
------------	---------------	-----------------	------	------	----------

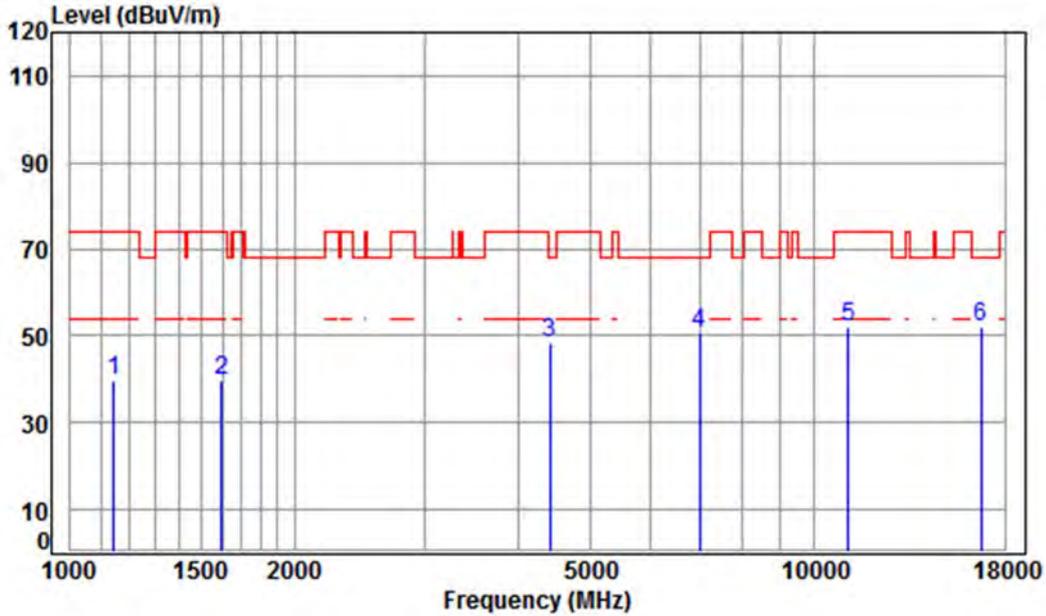

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5550 TX RSE

: Ant 2 5G WIFI 11N(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.84	39.54	74.00	-34.46	peak
2	1597.181	5.35	26.24	38.70	46.69	39.58	74.00	-34.42	peak
3	4405.090	7.46	33.60	38.14	45.66	48.58	68.20	-19.62	peak
4	7015.420	10.13	36.49	38.20	42.41	50.83	68.20	-17.37	peak
5	11100.000	11.73	37.78	36.43	38.77	51.85	74.00	-22.15	peak
6	pp16740.000	15.57	42.75	38.10	31.62	51.84	68.20	-16.36	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

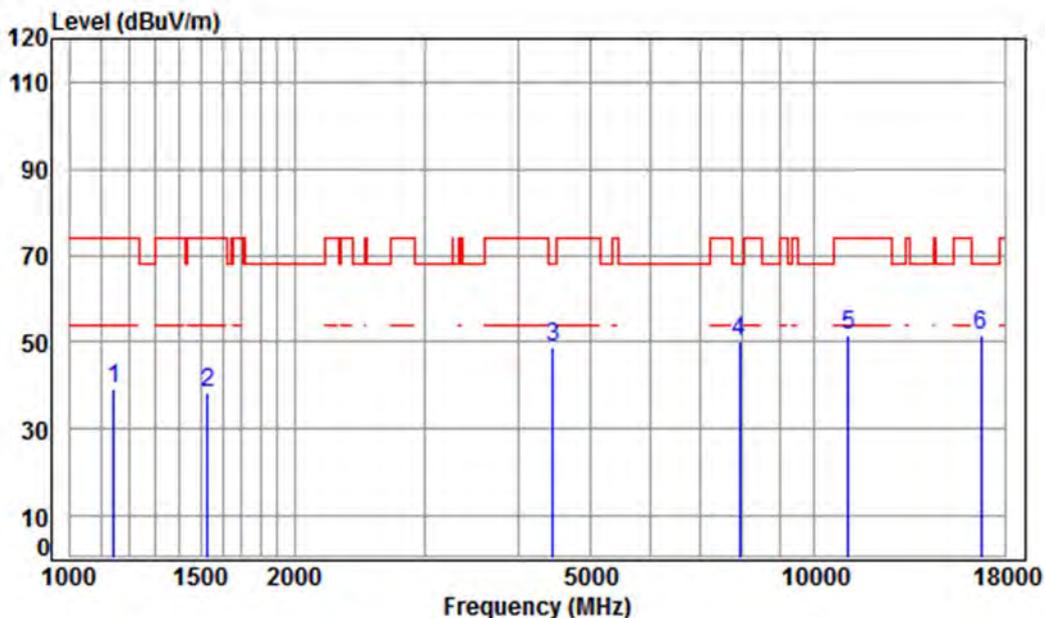

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5550 TX RSE

: Ant 2 5G WIFI 11N(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.58	39.28	74.00	-34.72	peak
2	1529.414	5.44	25.94	38.70	45.65	38.33	74.00	-35.67	peak
3	4456.315	7.51	33.60	38.15	45.92	48.88	68.20	-19.32	peak
4	7920.911	9.96	36.55	38.29	42.11	50.33	68.20	-17.87	peak
5	11100.000	11.73	37.78	36.43	38.53	51.61	74.00	-22.39	peak
6	pp16740.000	15.57	42.75	38.10	31.49	51.71	68.20	-16.49	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

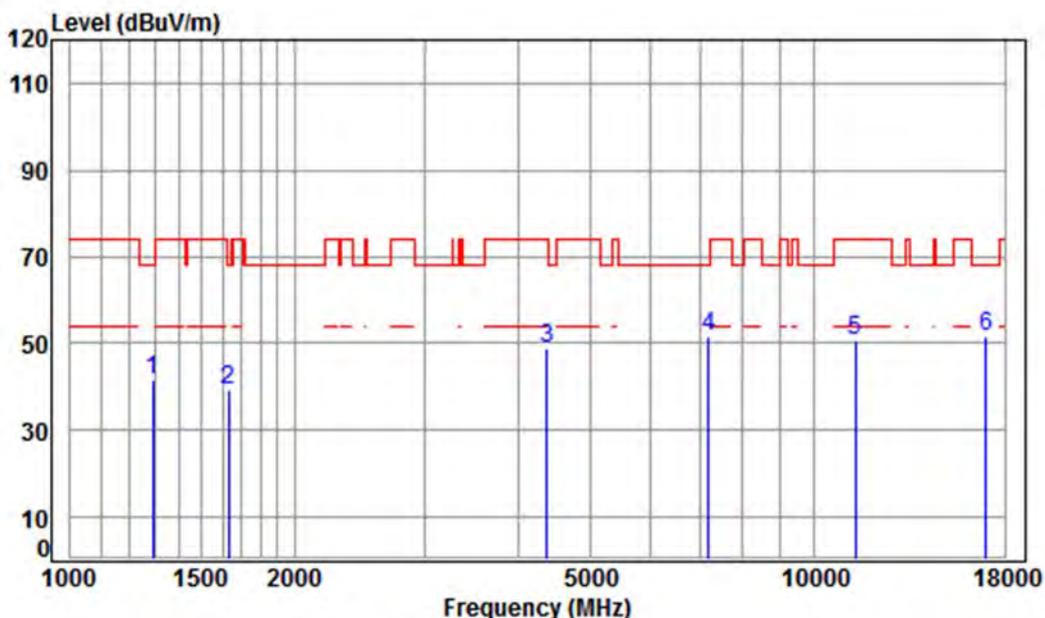

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5670 TX RSE

: Ant 2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1289.627	4.76	24.91	38.70	50.40	41.37	68.20	-26.83 peak
2	1634.543	5.31	26.40	38.70	46.19	39.20	68.20	-29.00 peak
3	4367.058	7.41	33.60	38.14	45.87	48.74	74.00	-25.26 peak
4	7200.309	10.08	36.42	38.22	43.07	51.35	68.20	-16.85 peak
5	11340.000	11.98	37.97	36.50	37.33	50.78	74.00	-23.22 peak
6	pp17010.000	16.69	42.81	38.20	30.32	51.62	68.20	-16.58 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

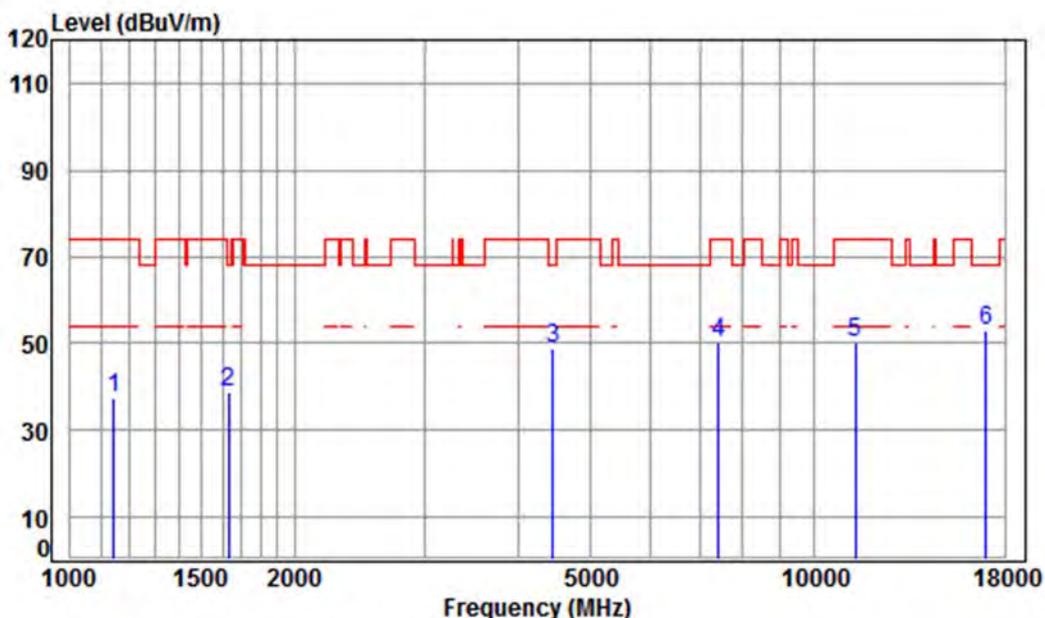

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5670 TX RSE

: Ant 2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	47.91	37.61	74.00	-36.39 peak
2	1634.543	5.31	26.40	38.70	45.59	38.60	68.20	-29.60 peak
3	4456.315	7.51	33.60	38.15	45.77	48.73	68.20	-19.47 peak
4	7432.914	10.02	36.33	38.24	42.16	50.27	74.00	-23.73 peak
5	11340.000	11.98	37.97	36.50	36.89	50.34	74.00	-23.66 peak
6	pp17010.000	16.69	42.81	38.20	31.52	52.82	68.20	-15.38 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

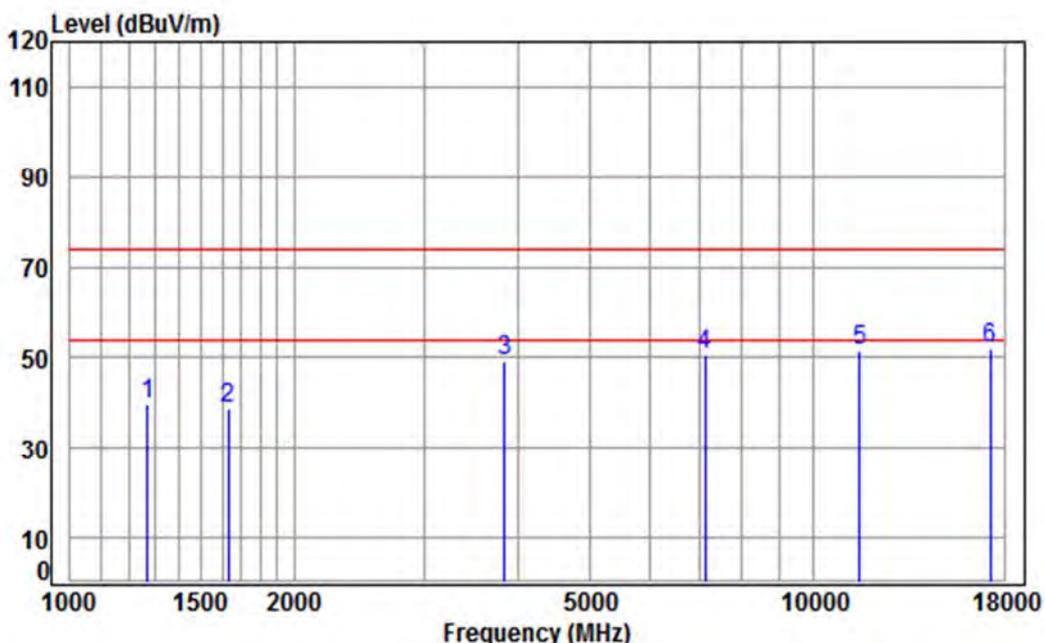

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5755 TX RSE

: Ant 1 5G WIFI 11N(40) CH151

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	4.69	24.82	38.70	49.08	39.89	74.00	-34.11	peak
2	5.31	26.40	38.70	45.94	38.95	74.00	-35.05	peak
3	6.82	33.16	38.06	47.38	49.30	74.00	-24.70	peak
4	10.09	36.44	38.21	42.15	50.47	74.00	-23.53	peak
5	12.14	38.11	36.56	37.86	51.55	74.00	-22.45	peak
6	16.12	43.12	38.12	30.89	52.01	74.00	-21.99	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

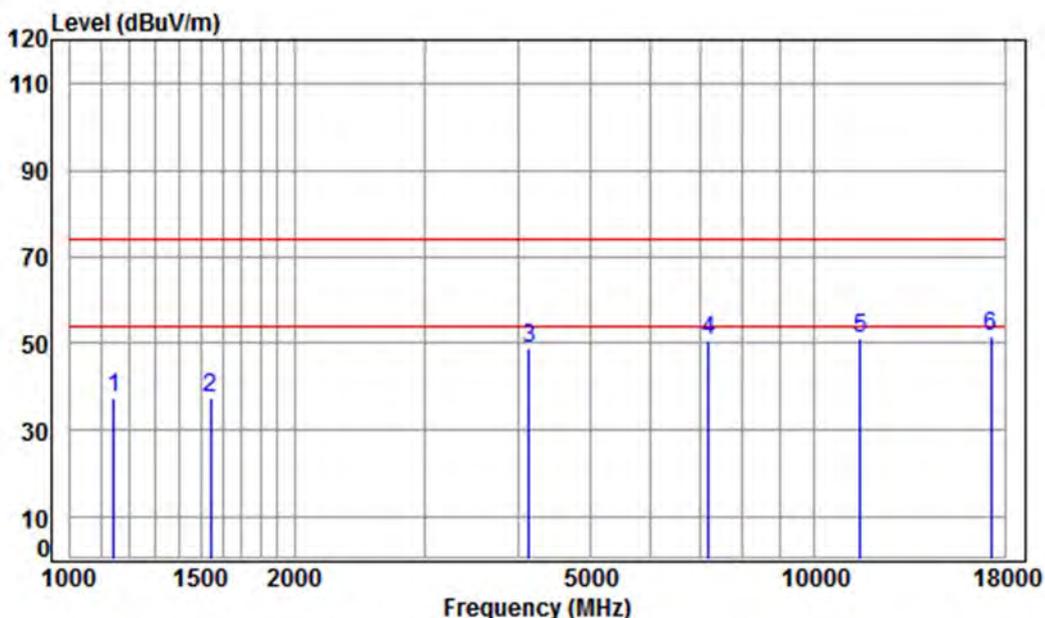

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5755 TX RSE

: Ant 1 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.81	37.51	74.00	-36.49	peak
2	1542.733	5.42	26.00	38.70	44.81	37.53	74.00	-36.47	peak
3	4133.699	7.14	33.60	38.11	46.08	48.71	74.00	-25.29	peak
4	7200.309	10.08	36.42	38.22	42.51	50.79	74.00	-23.21	peak
5	11510.000	12.14	38.11	36.56	37.58	51.27	74.00	-22.73	peak
6	pp17265.000	16.12	43.12	38.12	30.22	51.34	74.00	-22.66	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

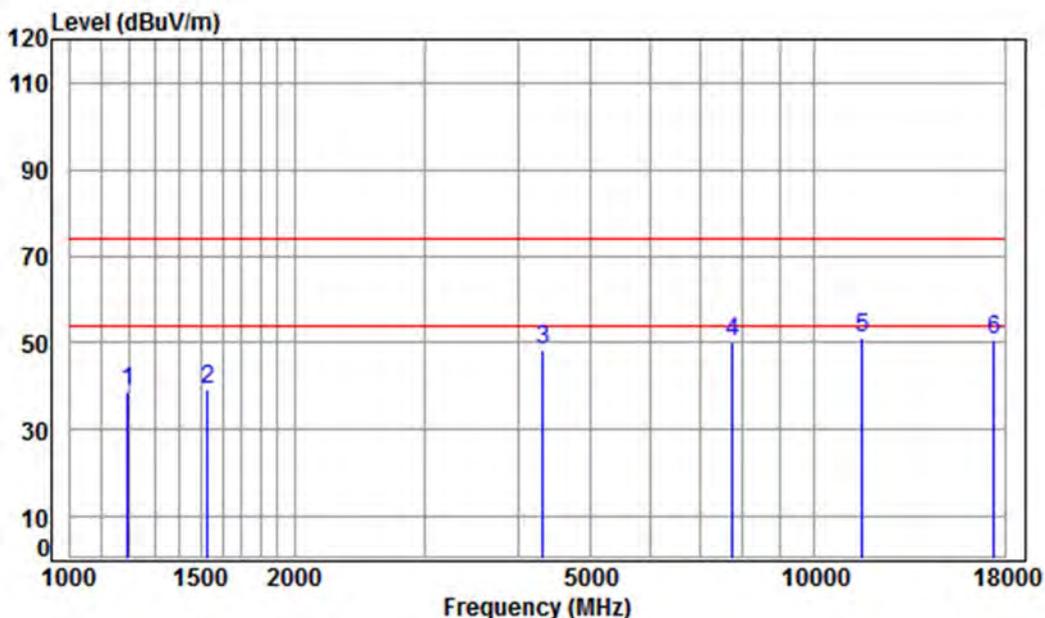

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5795 TX RSE

: Ant 1 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	48.48	38.64	74.00	-35.36	peak
2	1529.414	5.44	25.94	38.70	46.76	39.44	74.00	-34.56	peak
3	4316.859	7.36	33.60	38.13	45.73	48.56	74.00	-25.44	peak
4	7762.260	9.97	36.46	38.28	42.18	50.33	74.00	-23.67	peak
5	pp11590.000	12.17	38.19	36.58	37.29	51.07	74.00	-22.93	peak
6	17385.000	15.85	43.26	38.08	29.75	50.78	74.00	-23.22	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

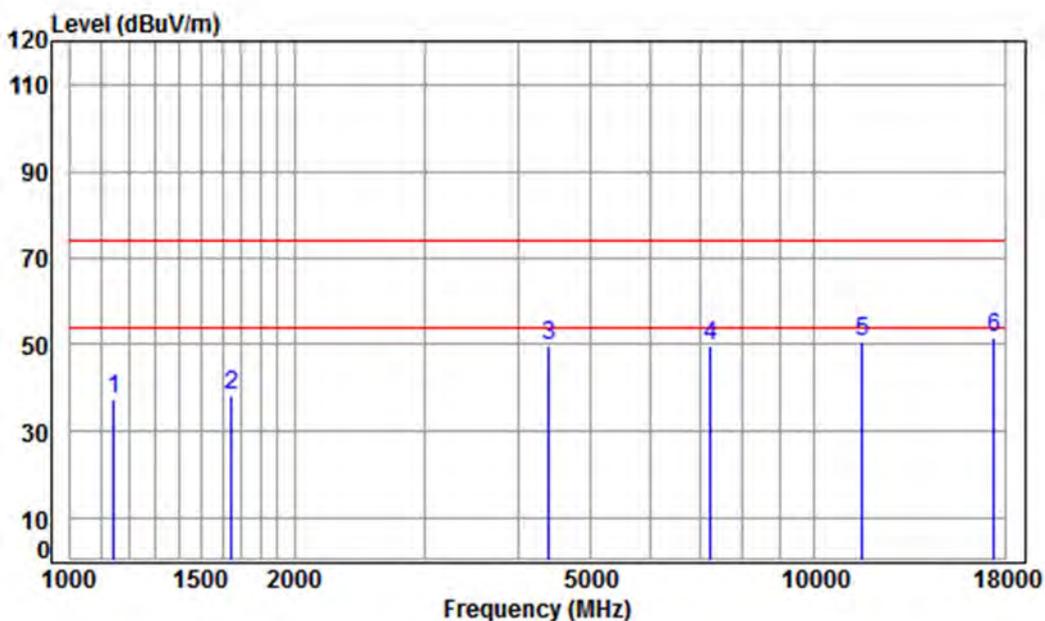

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5795 TX RSE

: Ant 1 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.78	37.48	74.00	-36.52	peak
2	1648.778	5.29	26.46	38.70	45.10	38.15	74.00	-35.85	peak
3	4392.376	7.44	33.60	38.14	46.77	49.67	74.00	-24.33	peak
4	7242.052	10.07	36.40	38.23	41.37	49.61	74.00	-24.39	peak
5	11590.000	12.17	38.19	36.58	36.99	50.77	74.00	-23.23	peak
6	pp17385.000	15.85	43.26	38.08	30.42	51.45	74.00	-22.55	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

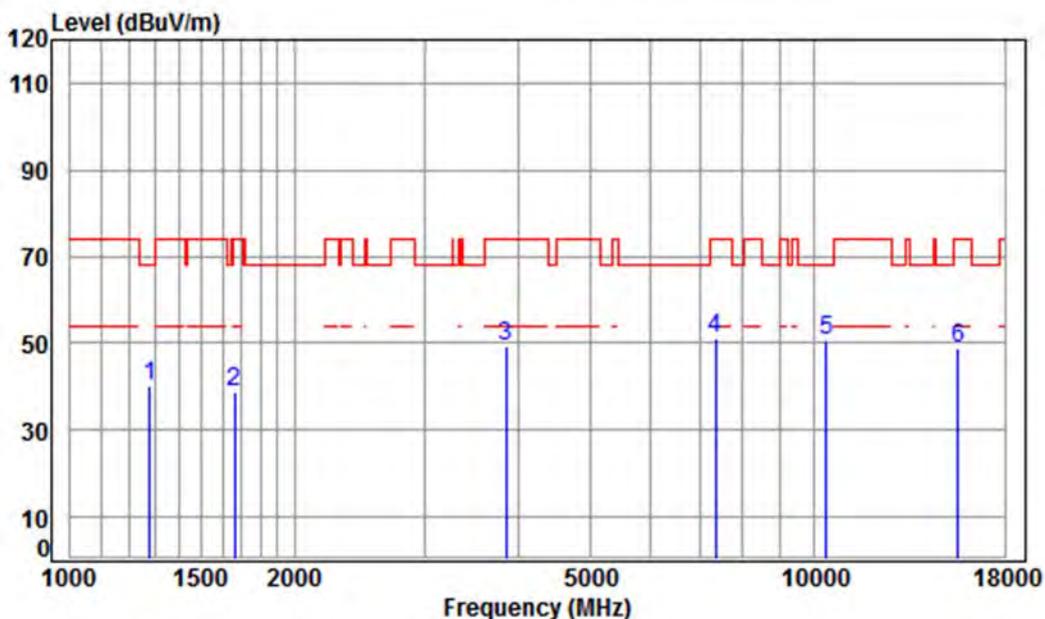

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5190 TX RSE

: Ant 1 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	4.72	24.85	38.70	49.34	40.21	68.20	-27.99	peak
2	1663.137	5.27	26.52	38.70	45.53	38.62	74.00	-35.38	peak
3	3845.537	6.83	33.19	38.06	47.49	49.45	74.00	-24.55	peak
4	7368.741	10.03	36.35	38.24	42.77	50.91	74.00	-23.09	peak
5	pp10380.000	11.21	37.22	36.34	38.43	50.52	68.20	-17.68	peak
6	15570.000	14.35	41.37	38.10	31.32	48.94	74.00	-25.06	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

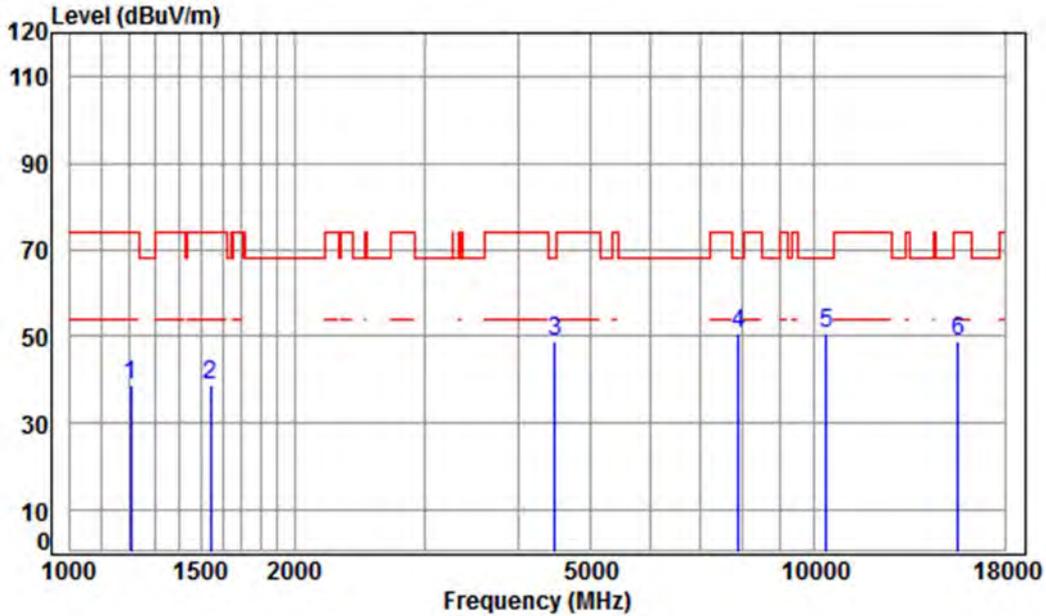

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5190 TX RSE

: Ant 1 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	38.70	48.63	38.88	74.00	-35.12	peak
2	1542.733	5.42	26.00	38.70	45.86	38.58	74.00	-35.42	peak
3	4482.150	7.54	33.60	38.15	45.95	48.94	68.20	-19.26	peak
4	7898.049	9.96	36.54	38.29	42.43	50.64	68.20	-17.56	peak
5	pp10380.000	11.21	37.22	36.34	38.68	50.77	68.20	-17.43	peak
6	15570.000	14.35	41.37	38.10	31.10	48.72	74.00	-25.28	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

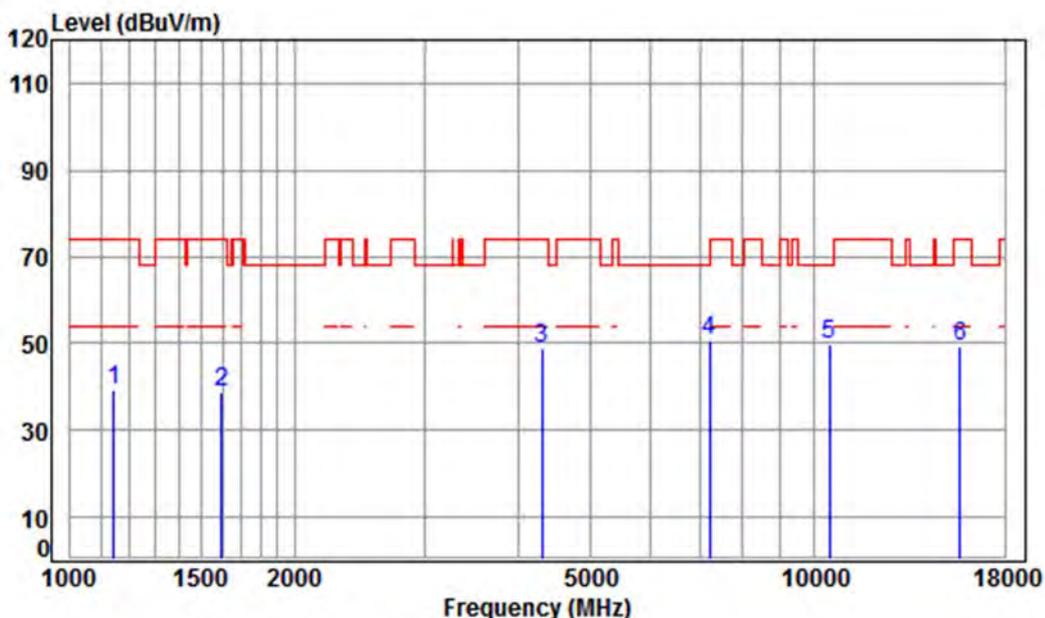

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5230 TX RSE

: Ant 1 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.73	39.43	74.00	-34.57 peak
2	1597.181	5.35	26.24	38.70	45.75	38.64	74.00	-35.36 peak
3	4304.400	7.34	33.60	38.13	46.20	49.01	74.00	-24.99 peak
4 pp	7221.150	10.07	36.41	38.22	42.26	50.52	68.20	-17.68 peak
5	10460.000	11.26	37.14	36.35	37.84	49.89	68.20	-18.31 peak
6	15690.000	14.53	41.32	38.01	31.57	49.41	74.00	-24.59 peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

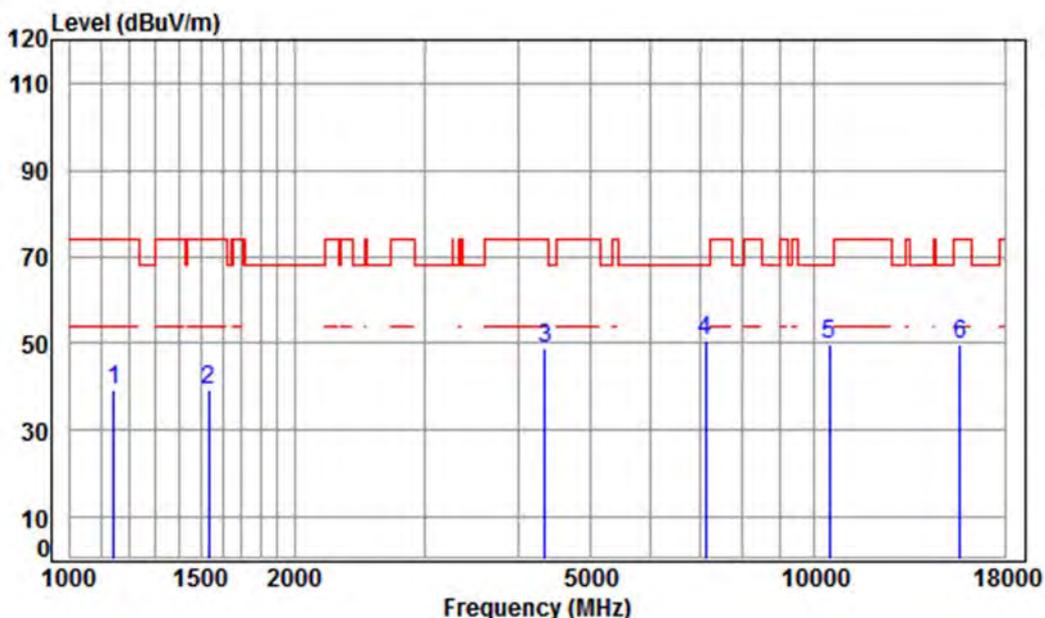

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5230 TX RSE

: Ant 1 5G WIFI 11AC(40) CH46


	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.38	39.08	74.00	-34.92	peak
2	1533.841	5.44	25.96	38.70	46.54	39.24	74.00	-34.76	peak
3	4341.886	7.38	33.60	38.14	46.15	48.99	74.00	-25.01	peak
4 pp	7138.144	10.09	36.44	38.21	42.53	50.85	68.20	-17.35	peak
5	10460.000	11.26	37.14	36.35	37.88	49.93	68.20	-18.27	peak
6	15690.000	14.53	41.32	38.01	31.78	49.62	74.00	-24.38	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180100021702
 Page: 116 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

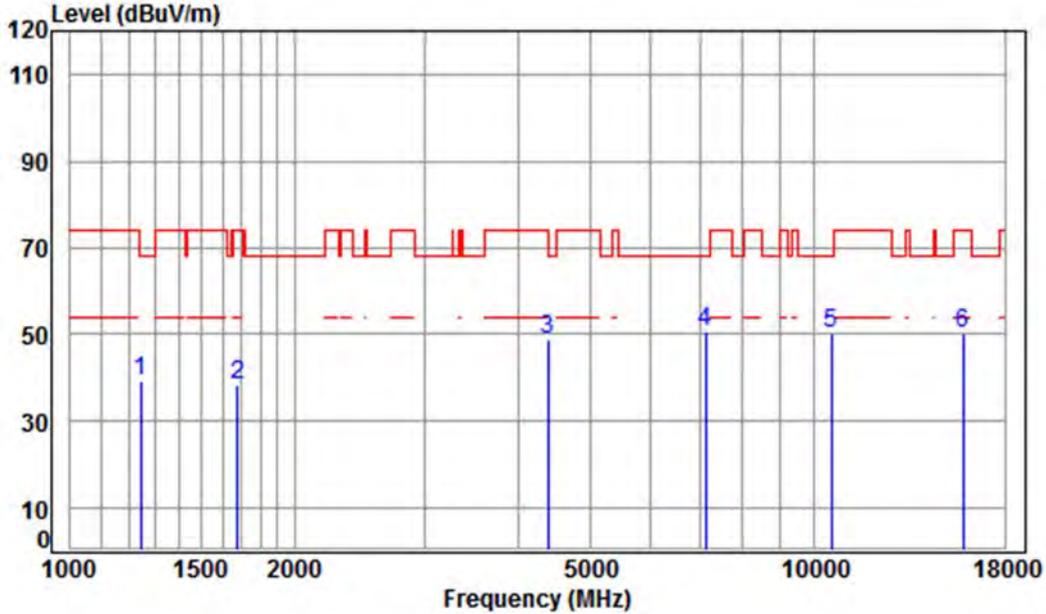

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5270 TX RSE

: Ant 1 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	4.60	24.70	38.70	48.60	39.20	68.20	-29.00	peak
2	1677.621	5.25	26.58	38.70	45.33	38.46	74.00	-35.54	peak
3	4379.699	7.43	33.60	38.14	46.00	48.89	74.00	-25.11	peak
4 pp	7138.144	10.09	36.44	38.21	42.26	50.58	68.20	-17.62	peak
5	10540.000	11.32	37.15	36.36	38.29	50.40	68.20	-17.80	peak
6	15810.000	14.71	41.28	37.93	32.03	50.09	74.00	-23.91	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

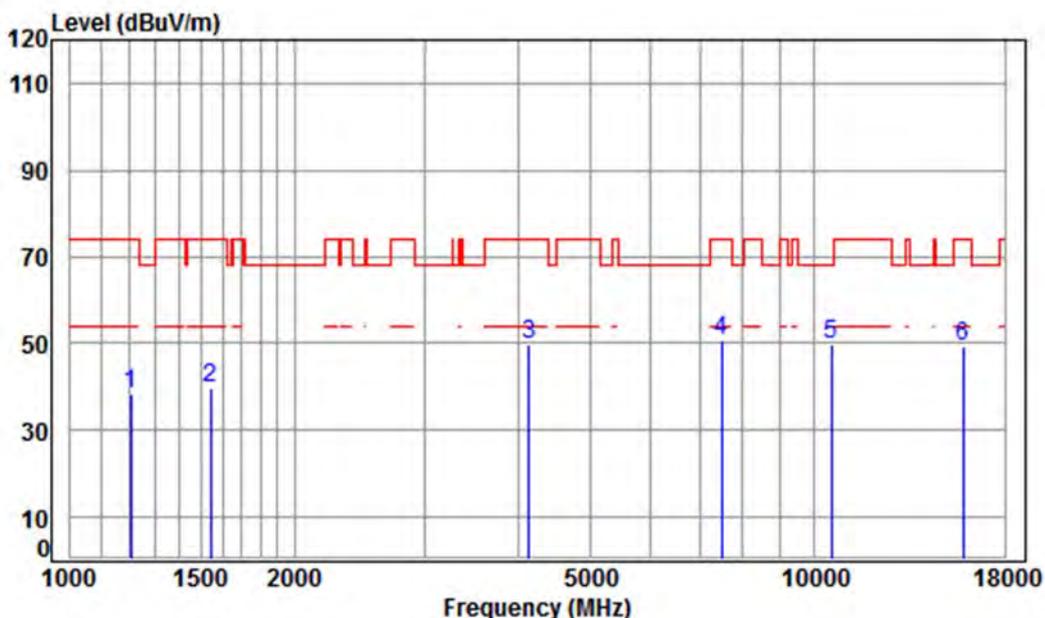

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5270 TX RSE

: Ant 1 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	38.70	48.19	38.44	74.00	-35.56	peak
2	1542.733	5.42	26.00	38.70	47.02	39.74	74.00	-34.26	peak
3	4133.699	7.14	33.60	38.11	46.88	49.51	74.00	-24.49	peak
4	7497.646	10.00	36.30	38.25	42.55	50.60	74.00	-23.40	peak
5	pp10540.000	11.32	37.15	36.36	37.55	49.66	68.20	-18.54	peak
6	15810.000	14.71	41.28	37.93	31.16	49.22	74.00	-24.78	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

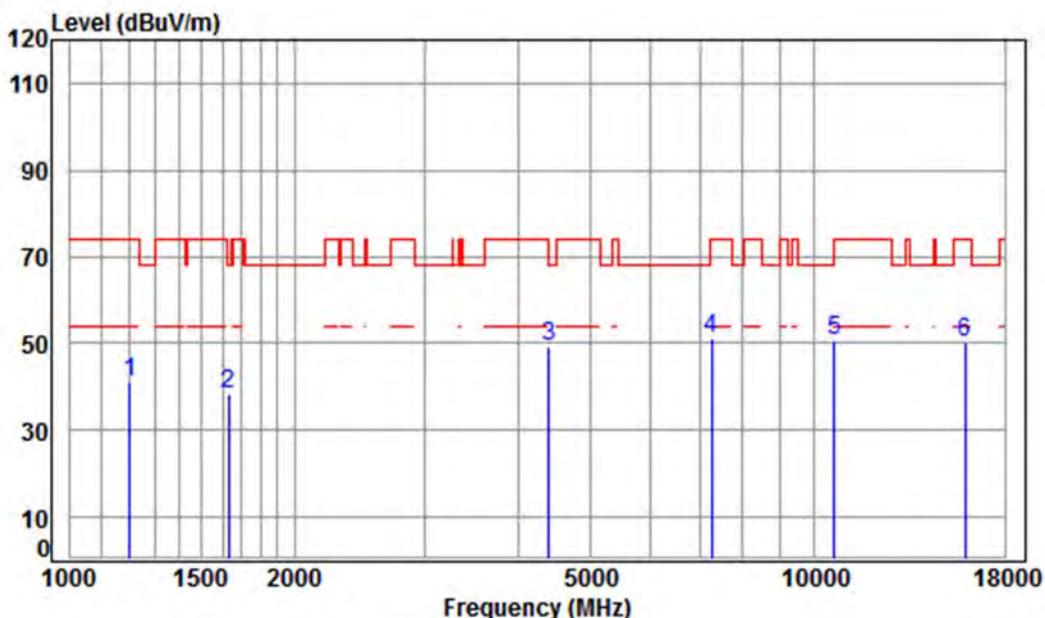

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5310 TX RSE

: Ant 1 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	50.88	41.10	74.00	-32.90	peak
2	1634.543	5.31	26.40	38.70	45.36	38.37	68.20	-29.83	peak
3	4392.376	7.44	33.60	38.14	46.33	49.23	74.00	-24.77	peak
4	7263.015	10.06	36.39	38.23	42.88	51.10	74.00	-22.90	peak
5	10620.000	11.37	37.25	36.36	38.18	50.44	74.00	-23.56	peak
6	15930.000	14.89	41.23	37.85	31.77	50.04	74.00	-23.96	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180100021702

Page: 119 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

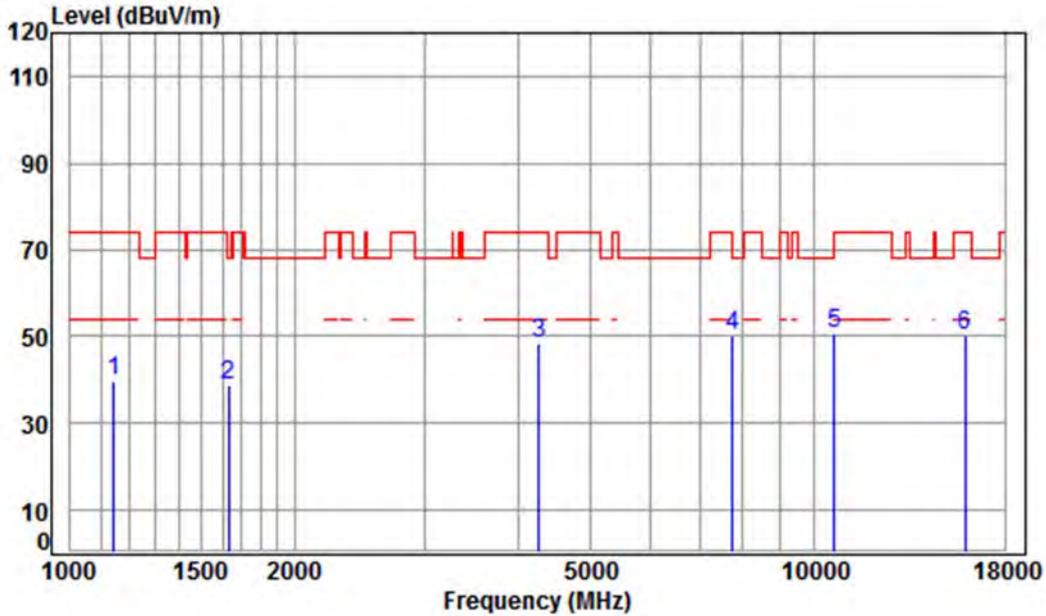

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5310 TX RSE

: Ant 1 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.84	39.54	74.00	-34.46 peak
2	1629.825	5.31	26.38	38.70	45.68	38.67	68.20	-29.53 peak
3	4267.237	7.30	33.60	38.13	45.39	48.16	74.00	-25.84 peak
4 pp	7762.260	9.97	36.46	38.28	42.08	50.23	68.20	-17.97 peak
5	10620.000	11.37	37.25	36.36	38.36	50.62	74.00	-23.38 peak
6	15930.000	14.89	41.23	37.85	31.70	49.97	74.00	-24.03 peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

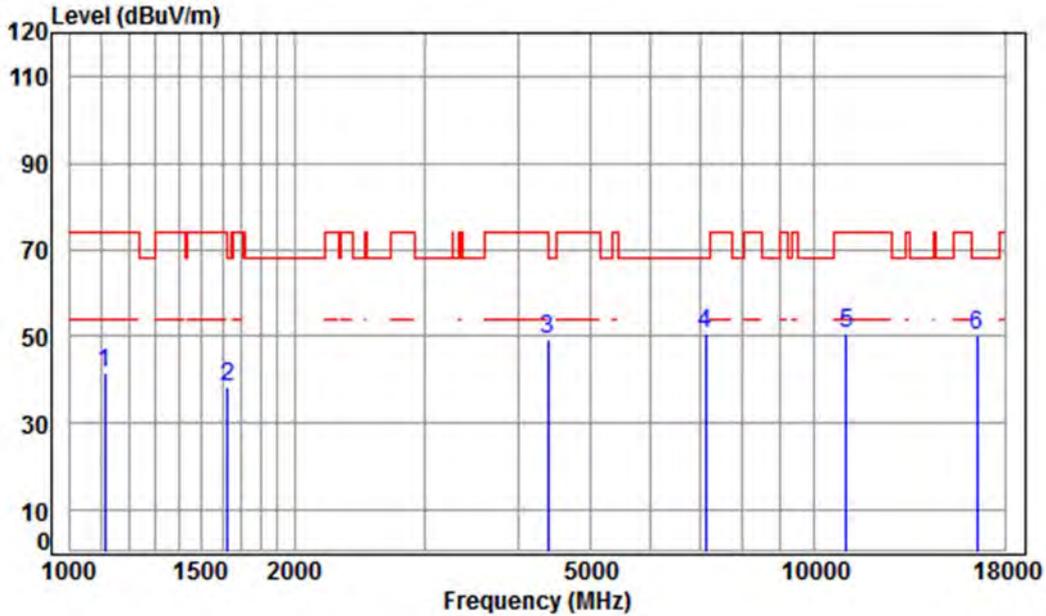

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 TX RSE

: Ant 1 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1112.872	4.06	24.03	38.70	52.20	41.59	74.00	-32.41	peak
2	1625.121	5.32	26.36	38.70	45.26	38.24	74.00	-35.76	peak
3	4379.699	7.43	33.60	38.14	46.59	49.48	74.00	-24.52	peak
4	7138.144	10.09	36.44	38.21	42.15	50.47	68.20	-17.73	peak
5	11020.000	11.65	37.72	36.41	37.57	50.53	74.00	-23.47	peak
6	16530.000	14.63	42.71	38.02	31.04	50.36	68.20	-17.84	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 121 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

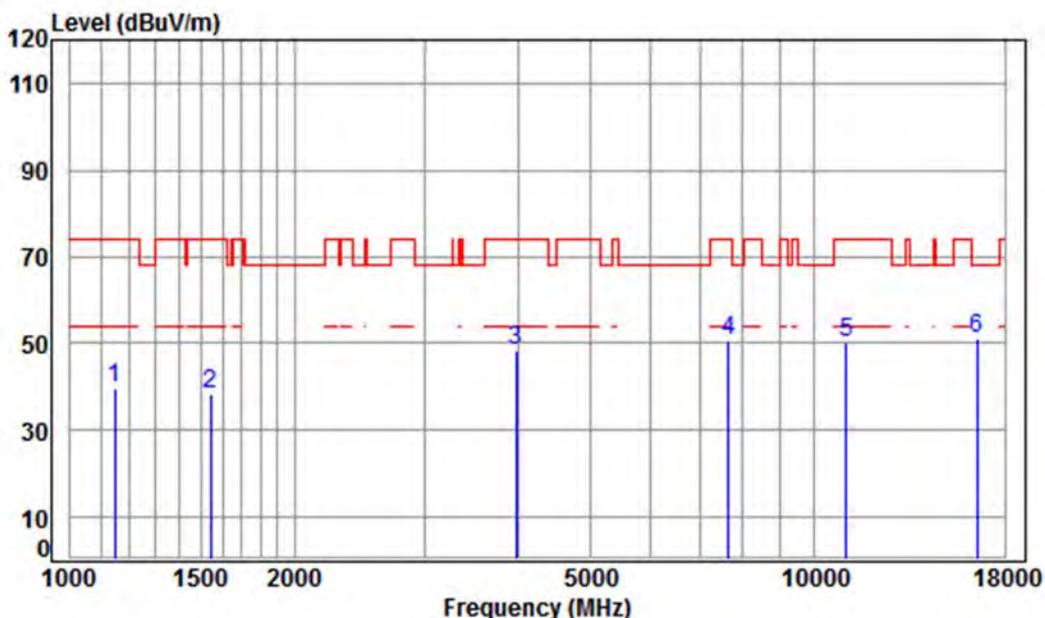

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5510 TX RSE

: Ant 1 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1148.823	4.21	24.22	38.70	49.82	39.55	74.00	-34.45	peak
2	1542.733	5.42	26.00	38.70	45.59	38.31	74.00	-35.69	peak
3	3969.767	6.95	33.52	38.09	46.11	48.49	74.00	-25.51	peak
4	7673.034	9.98	36.41	38.27	42.54	50.66	74.00	-23.34	peak
5	11020.000	11.65	37.72	36.41	37.45	50.41	74.00	-23.59	peak
6	pp16530.000	14.63	42.71	38.02	31.71	51.03	68.20	-17.17	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5550	Peak	Vertical
------------	----------------	-----------------	------	------	----------

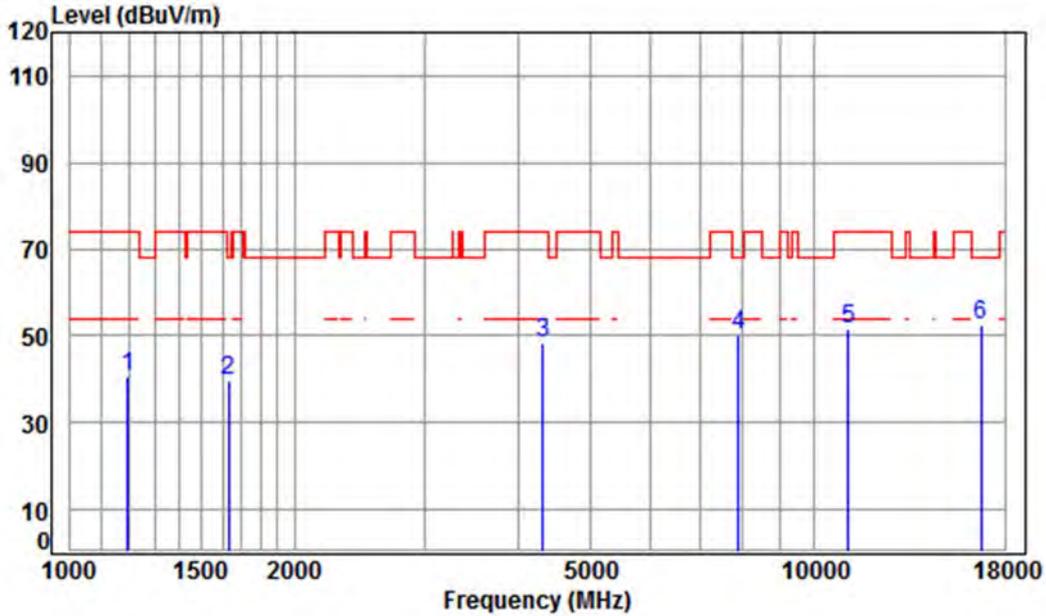

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5550 TX RSE

: Ant 1 5G WIFI 11AC(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	50.51	40.67	74.00	-33.33	peak
2	1634.543	5.31	26.40	38.70	46.57	39.58	68.20	-28.62	peak
3	4316.859	7.36	33.60	38.13	45.75	48.58	74.00	-25.42	peak
4	7898.049	9.96	36.54	38.29	42.04	50.25	68.20	-17.95	peak
5	11100.000	11.73	37.78	36.43	38.35	51.43	74.00	-22.57	peak
6	pp16740.000	15.57	42.75	38.10	32.26	52.48	68.20	-15.72	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5550	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

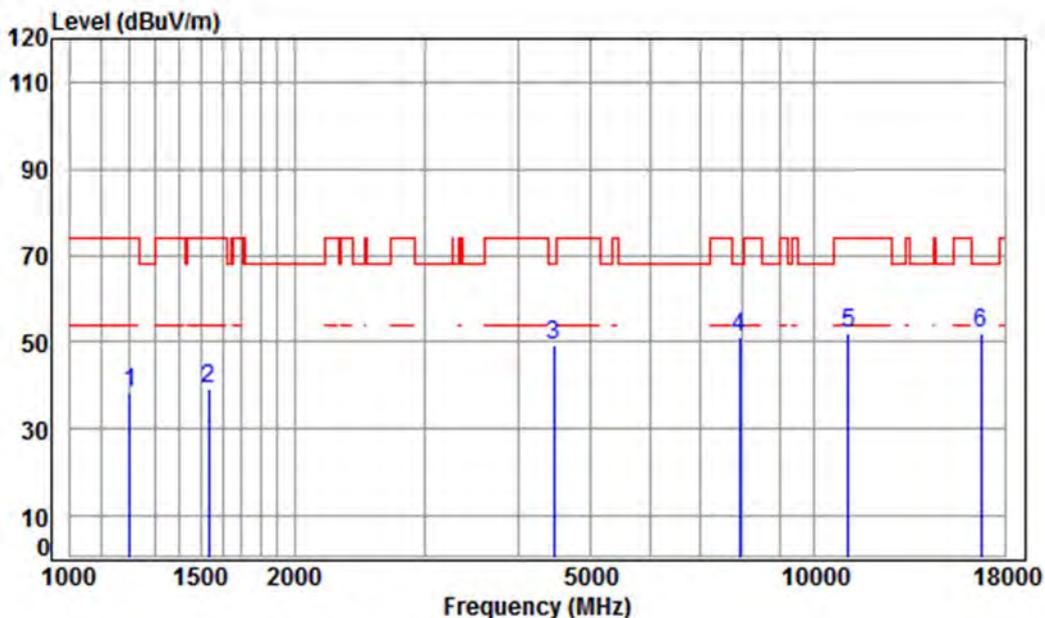

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5550 TX RSE

: Ant 1 5G WIFI 11AC(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	48.14	38.36	74.00	-35.64	peak
2	1533.841	5.44	25.96	38.70	46.53	39.23	74.00	-34.77	peak
3	4469.214	7.53	33.60	38.15	46.15	49.13	68.20	-19.07	peak
4	7920.911	9.96	36.55	38.29	42.73	50.95	68.20	-17.25	peak
5	11100.000	11.73	37.78	36.43	38.76	51.84	74.00	-22.16	peak
6	pp16740.000	15.57	42.75	38.10	31.66	51.88	68.20	-16.32	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 124 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	----------------	-----------------	------	------	----------

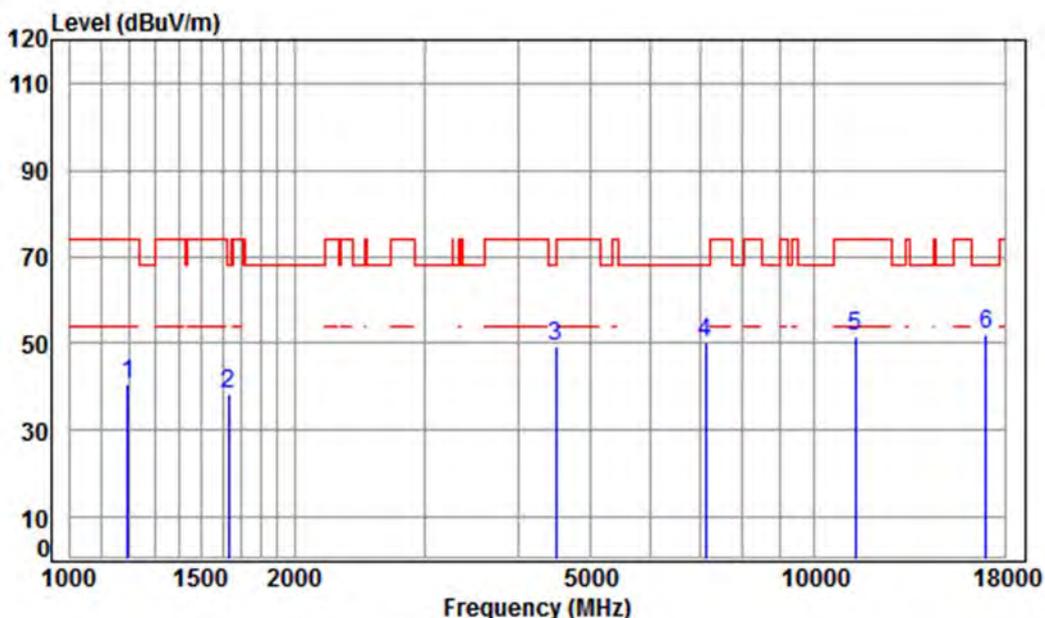

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5670 TX RSE

: Ant 1 5G WIFI 11AC(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	50.51	40.67	74.00	-33.33	peak
2	1629.825	5.31	26.38	38.70	45.16	38.15	68.20	-30.05	peak
3	4495.125	7.55	33.60	38.15	46.31	49.31	68.20	-18.89	peak
4	7138.144	10.09	36.44	38.21	42.04	50.36	68.20	-17.84	peak
5	11340.000	11.98	37.97	36.50	37.96	51.41	74.00	-22.59	peak
6	pp17010.000	16.69	42.81	38.20	30.81	52.11	68.20	-16.09	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 125 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

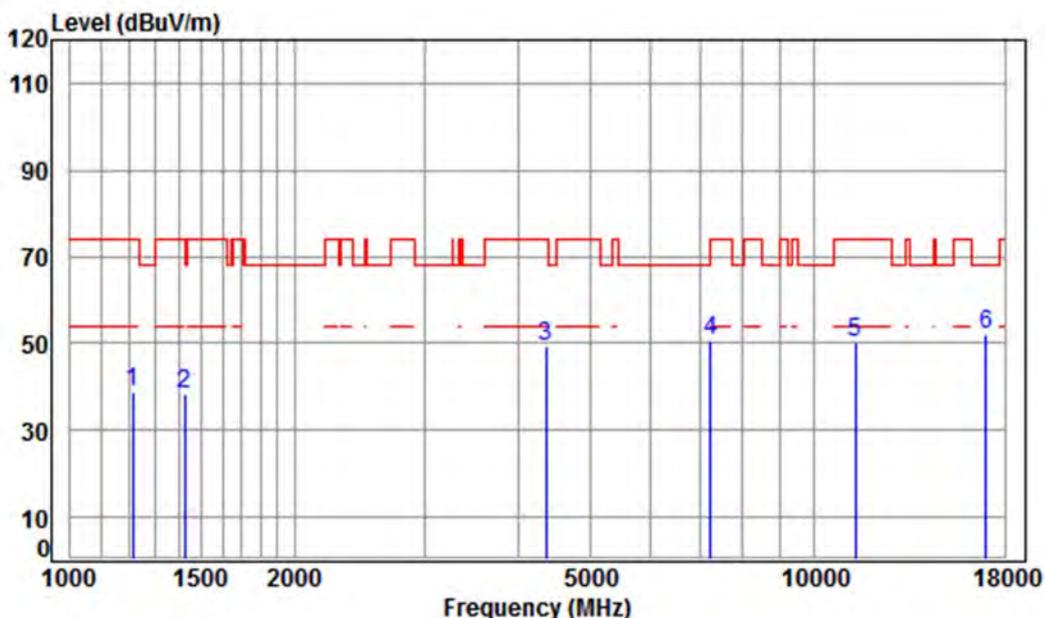

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5670 TX RSE

: Ant 1 5G WIFI 11AC(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1213.677	4.47	24.55	38.70	48.27	38.59	74.00	-35.41	peak
2	1426.916	5.24	25.50	38.70	46.40	38.44	74.00	-35.56	peak
3	4354.454	7.40	33.60	38.14	46.40	49.26	74.00	-24.74	peak
4	7242.052	10.07	36.40	38.23	42.38	50.62	68.20	-17.58	peak
5	11340.000	11.98	37.97	36.50	36.77	50.22	74.00	-23.78	peak
6	pp17010.000	16.69	42.81	38.20	30.83	52.13	68.20	-16.07	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	----------------	-----------------	------	------	----------

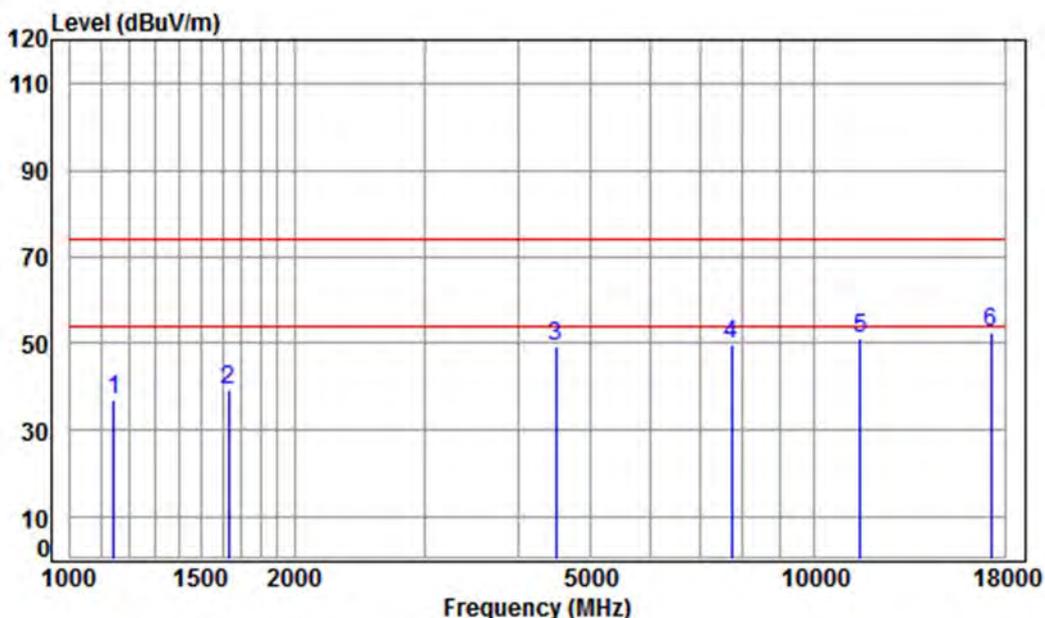

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5755 TX RSE

: Ant 1 5G WIFI 11AC(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	47.20	36.90	74.00	-37.10 peak
2	1634.543	5.31	26.40	38.70	46.29	39.30	74.00	-34.70 peak
3	4495.125	7.55	33.60	38.15	46.28	49.28	74.00	-24.72 peak
4	7739.857	9.98	36.45	38.28	41.79	49.94	74.00	-24.06 peak
5	11510.000	12.14	38.11	36.56	37.19	50.88	74.00	-23.12 peak
6	pp17265.000	16.12	43.12	38.12	31.12	52.24	74.00	-21.76 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 127 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

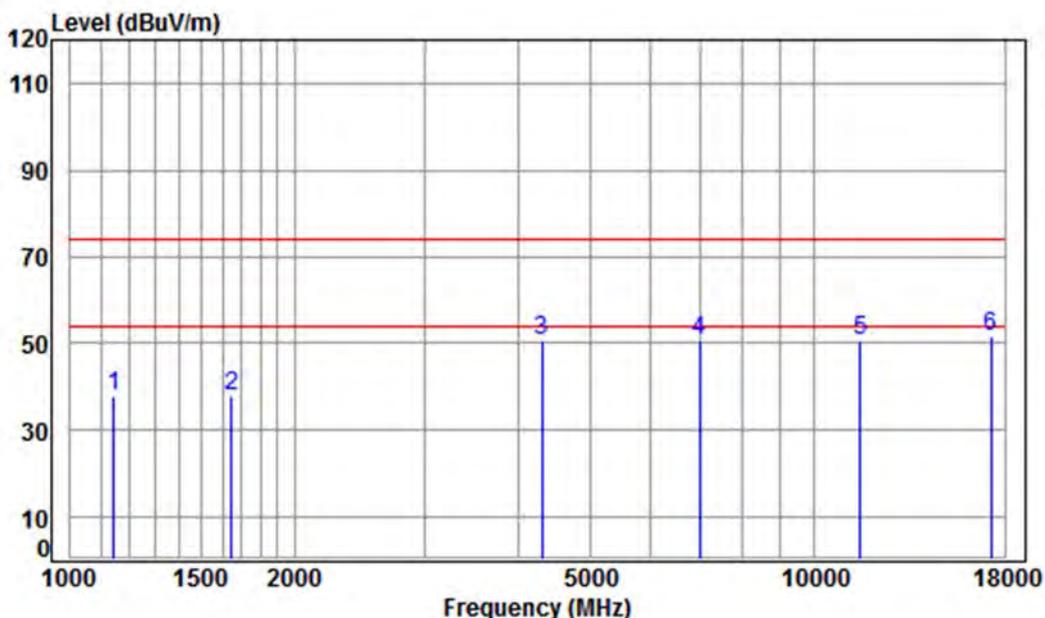

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5755 TX RSE

: Ant 1 5G WIFI 11AC(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.22	37.92	74.00	-36.08	peak
2	1648.778	5.29	26.46	38.70	44.92	37.97	74.00	-36.03	peak
3	4304.400	7.34	33.60	38.13	47.70	50.51	74.00	-23.49	peak
4	7015.420	10.13	36.49	38.20	42.23	50.65	74.00	-23.35	peak
5	11510.000	12.14	38.11	36.56	37.17	50.86	74.00	-23.14	peak
6	pp17265.000	16.12	43.12	38.12	30.41	51.53	74.00	-22.47	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	----------------	-----------------	------	------	----------

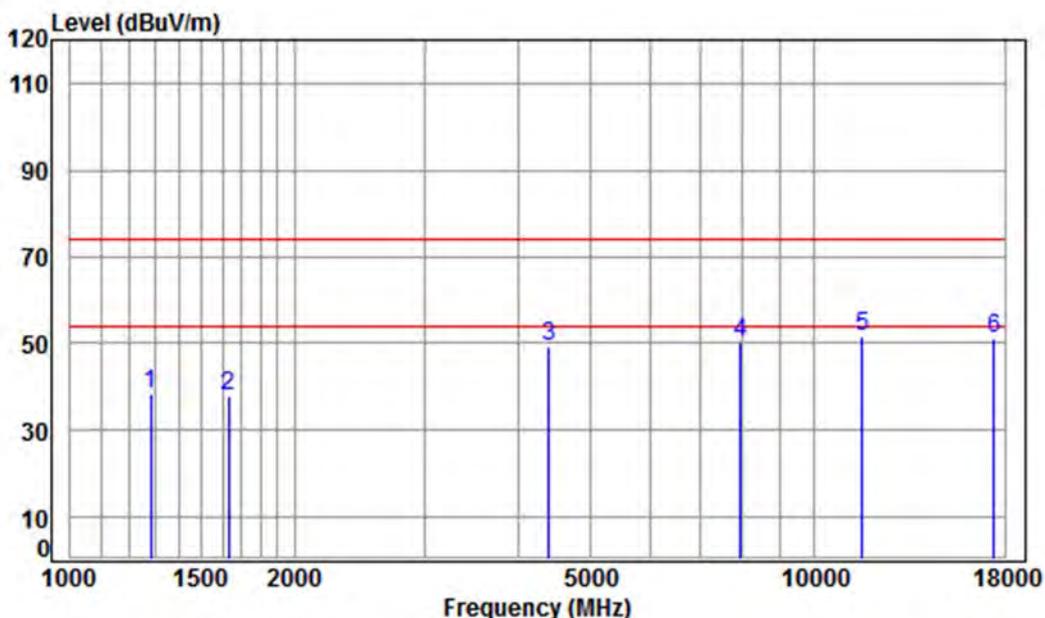

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5795 TX RSE

: Ant 1 5G WIFI 11AC(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1282.193	4.73	24.87	38.70	47.37	38.27	74.00	-35.73 peak
2	1629.825	5.31	26.38	38.70	44.79	37.78	74.00	-36.22 peak
3	4392.376	7.44	33.60	38.14	46.17	49.07	74.00	-24.93 peak
4	7943.838	9.96	36.57	38.29	42.02	50.26	74.00	-23.74 peak
5	pp11590.000	12.17	38.19	36.58	37.65	51.43	74.00	-22.57 peak
6	17385.000	15.85	43.26	38.08	30.25	51.28	74.00	-22.72 peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

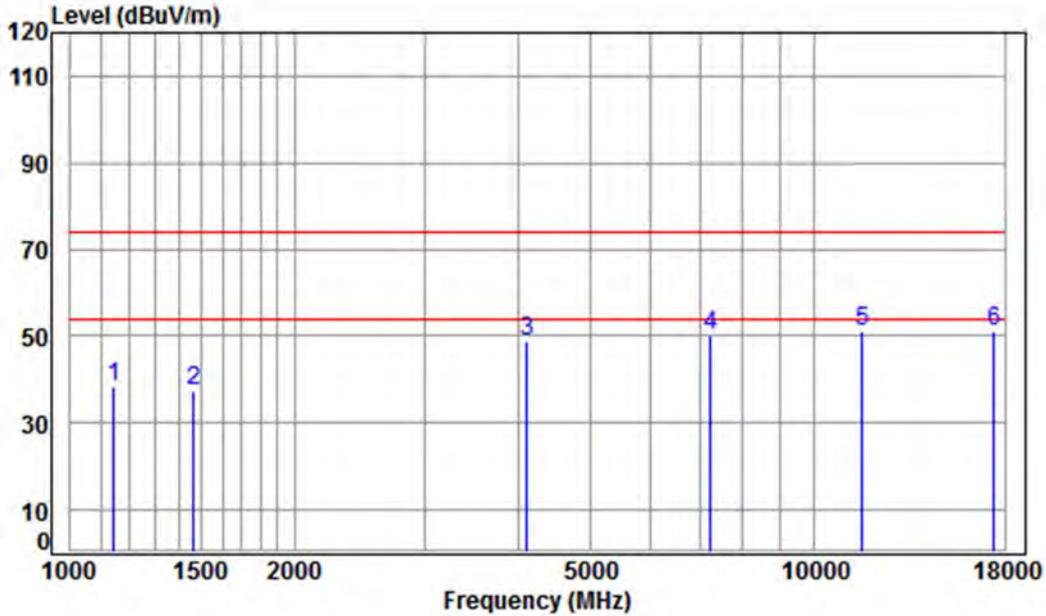

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5795 TX RSE

: Ant 1 5G WIFI 11AC(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.42	38.12	74.00	-35.88	peak
2	1464.522	5.37	25.66	38.70	45.07	37.40	74.00	-36.60	peak
3	4109.872	7.11	33.60	38.11	46.12	48.72	74.00	-25.28	peak
4	7242.052	10.07	36.40	38.23	41.77	50.01	74.00	-23.99	peak
5	11590.000	12.17	38.19	36.58	37.25	51.03	74.00	-22.97	peak
6	pp17385.000	15.85	43.26	38.08	30.09	51.12	74.00	-22.88	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Vertical
------------	----------------	-----------------	------	------	----------

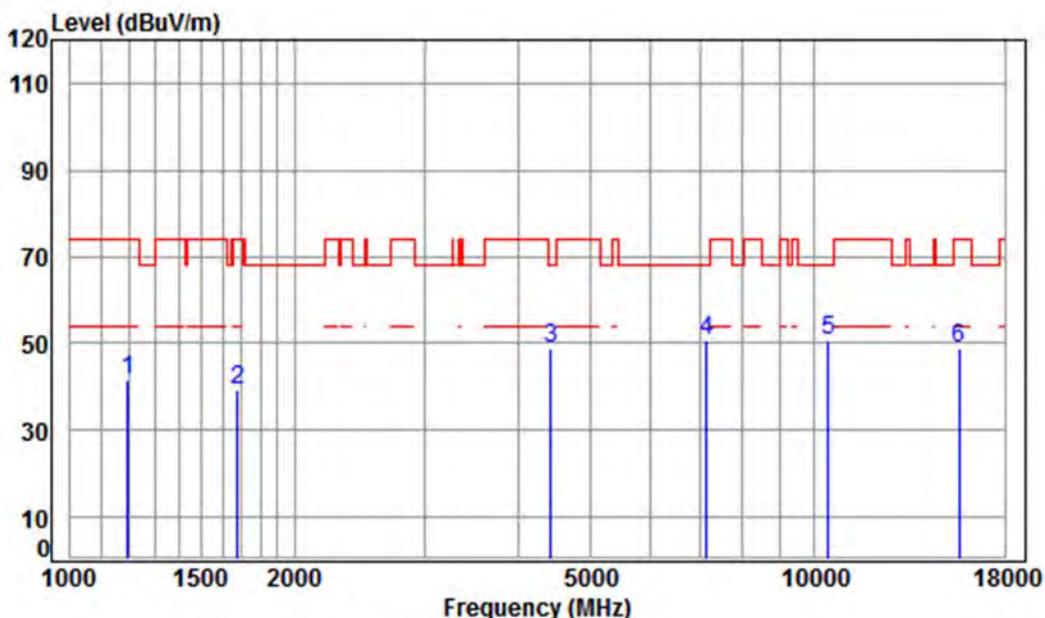

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5210 TX RSE

: Ant 1 5G WIFI 11AC(80) CH42

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	51.31	41.47	74.00	-32.53	peak
2	1677.621	5.25	26.58	38.70	45.93	39.06	74.00	-34.94	peak
3	4417.841	7.47	33.60	38.14	45.74	48.67	68.20	-19.53	peak
4	7158.806	10.09	36.43	38.22	42.23	50.53	68.20	-17.67	peak
5	pp10420.000	11.24	37.18	36.34	38.58	50.66	68.20	-17.54	peak
6	15630.000	14.44	41.35	38.05	30.86	48.60	74.00	-25.40	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

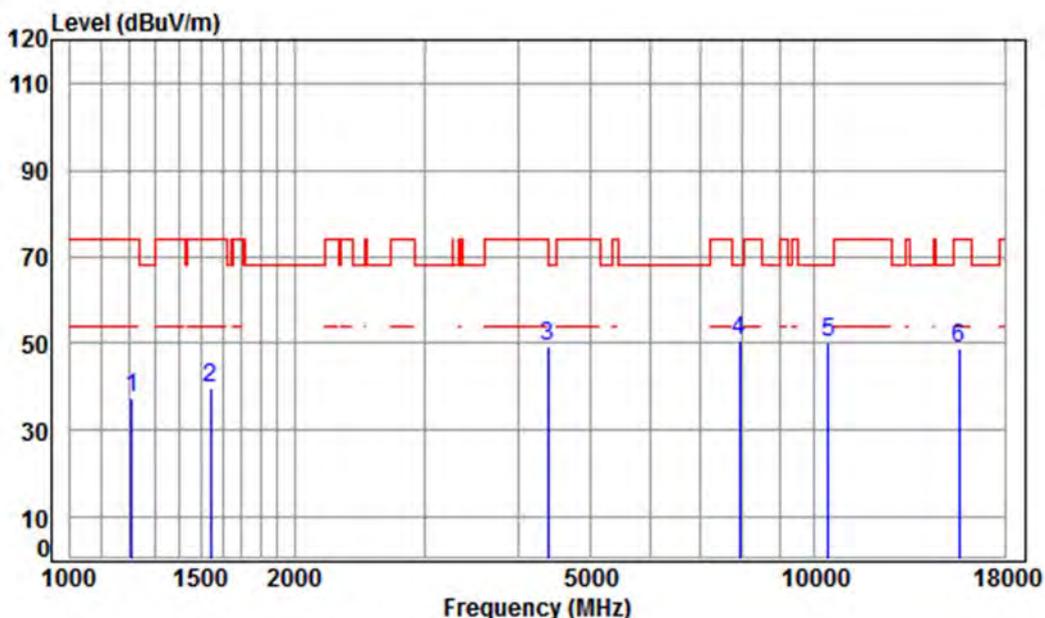

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5210 TX RSE

: Ant 1 5G WIFI 11AC(80) CH42

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	47.22	37.51	74.00	-36.49	peak
2	1542.733	5.42	26.00	38.70	46.94	39.66	74.00	-34.34	peak
3	4379.699	7.43	33.60	38.14	46.21	49.10	74.00	-24.90	peak
4	7920.911	9.96	36.55	38.29	42.27	50.49	68.20	-17.71	peak
5	10420.000	11.24	37.18	36.34	38.19	50.27	68.20	-17.93	peak
6	15630.000	14.44	41.35	38.05	31.10	48.84	74.00	-25.16	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Vertical
------------	----------------	-----------------	------	------	----------

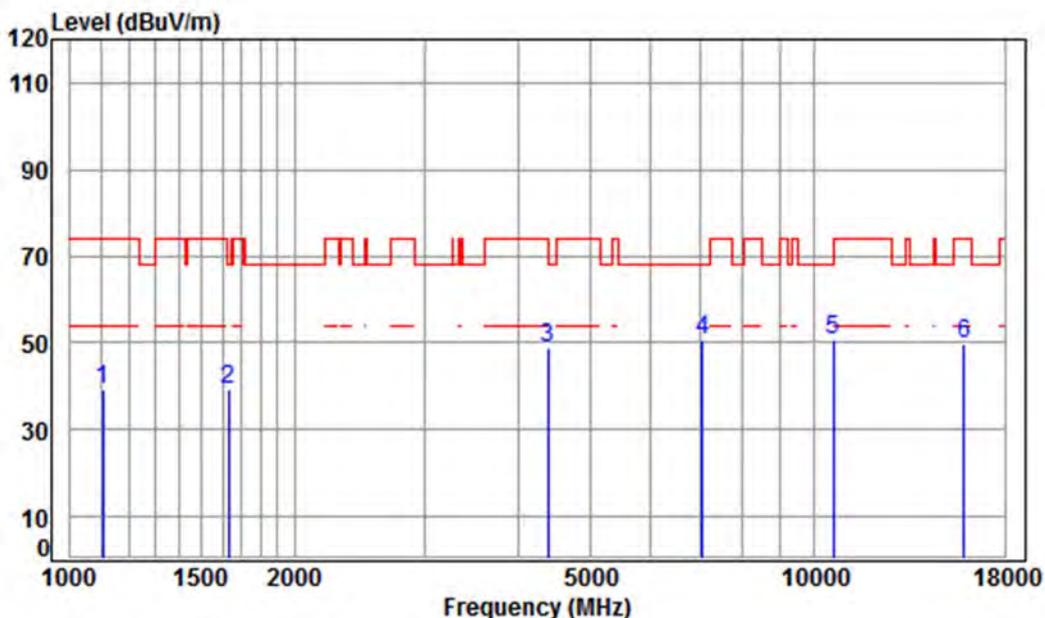

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5290 TX RSE

: Ant 1 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1106.457	4.03	24.00	38.70	49.87	39.20	74.00	-34.80	peak
2	1634.543	5.31	26.40	38.70	46.22	39.23	68.20	-28.97	peak
3	4379.699	7.43	33.60	38.14	45.91	48.80	74.00	-25.20	peak
4 pp	7076.516	10.11	36.47	38.21	42.39	50.76	68.20	-17.44	peak
5	10580.000	11.35	37.20	36.36	38.30	50.49	68.20	-17.71	peak
6	15870.000	14.80	41.25	37.89	31.71	49.87	74.00	-24.13	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

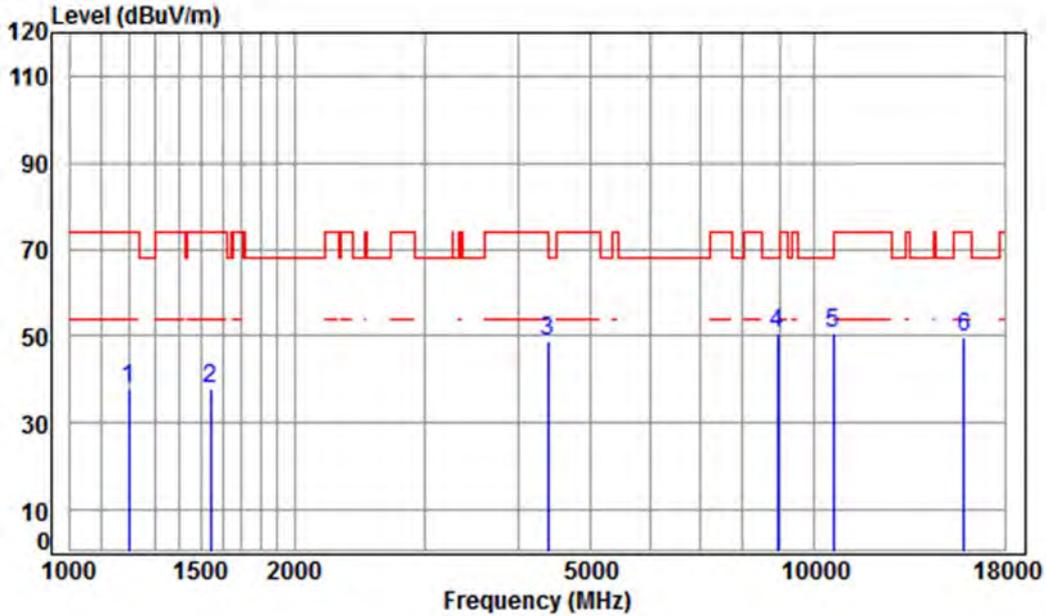

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5290 TX RSE

: Ant 1 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	38.70	47.63	37.83	74.00	-36.17	peak
2	1542.733	5.42	26.00	38.70	45.28	38.00	74.00	-36.00	peak
3	4379.699	7.43	33.60	38.14	46.08	48.97	74.00	-25.03	peak
4 pp	8917.462	10.38	36.50	38.21	41.99	50.66	68.20	-17.54	peak
5	10580.000	11.35	37.20	36.36	38.32	50.51	68.20	-17.69	peak
6	15870.000	14.80	41.25	37.89	31.67	49.83	74.00	-24.17	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Vertical
------------	----------------	-----------------	------	------	----------

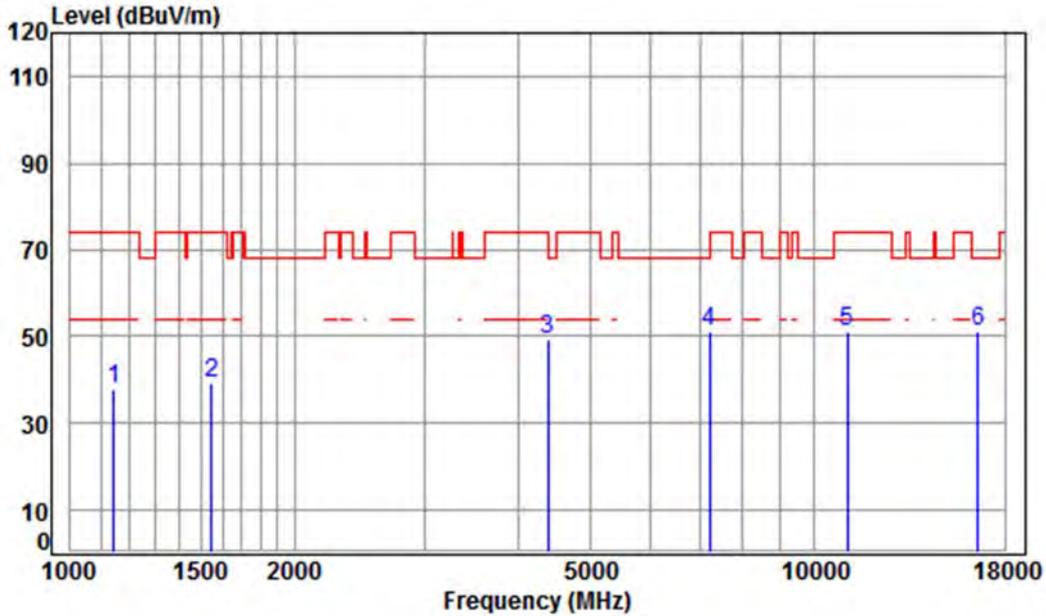

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5530 TX RSE

: Ant 1 5G WIFI 11AC(80) CH106

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.36	38.06	74.00	-35.94	peak
2	1547.199	5.42	26.02	38.70	46.67	39.41	74.00	-34.59	peak
3	4379.699	7.43	33.60	38.14	46.39	49.28	74.00	-24.72	peak
4	7221.150	10.07	36.41	38.22	42.72	50.98	68.20	-17.22	peak
5	11060.000	11.69	37.75	36.42	38.07	51.09	74.00	-22.91	peak
6	pp16590.000	14.90	42.72	38.04	31.69	51.27	68.20	-16.93	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

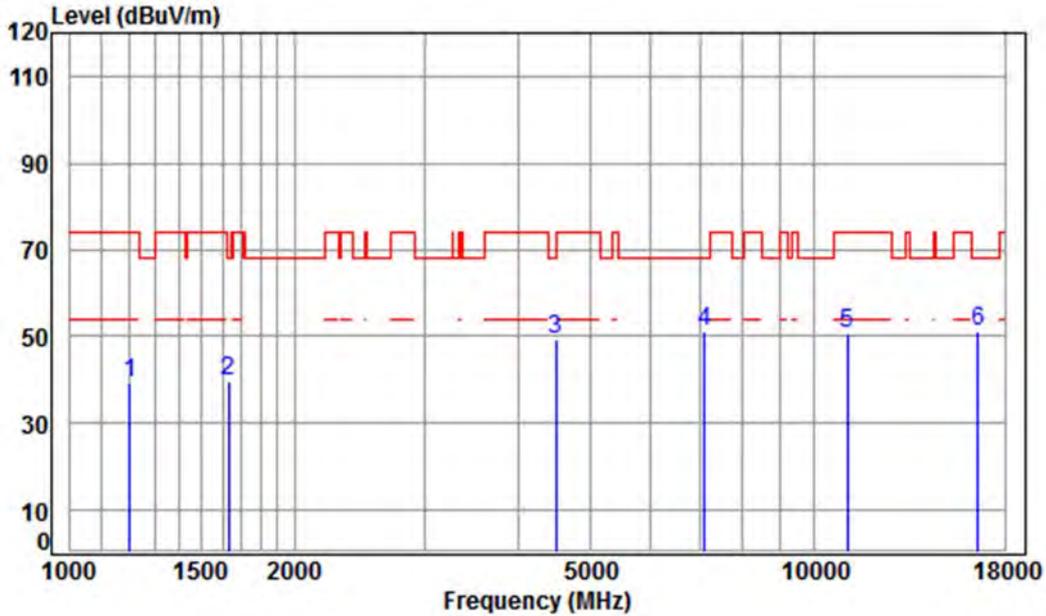

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5530 TX RSE

: Ant 1 5G WIFI 11AC(80) CH106

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	49.07	39.29	74.00	-34.71	peak
2	1634.543	5.31	26.40	38.70	46.51	39.52	68.20	-28.68	peak
3	4495.125	7.55	33.60	38.15	46.45	49.45	68.20	-18.75	peak
4	7117.542	10.10	36.45	38.21	42.70	51.04	68.20	-17.16	peak
5	11060.000	11.69	37.75	36.42	37.60	50.62	74.00	-23.38	peak
6	pp16590.000	14.90	42.72	38.04	31.74	51.32	68.20	-16.88	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 136 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Vertical
------------	----------------	-----------------	------	------	----------

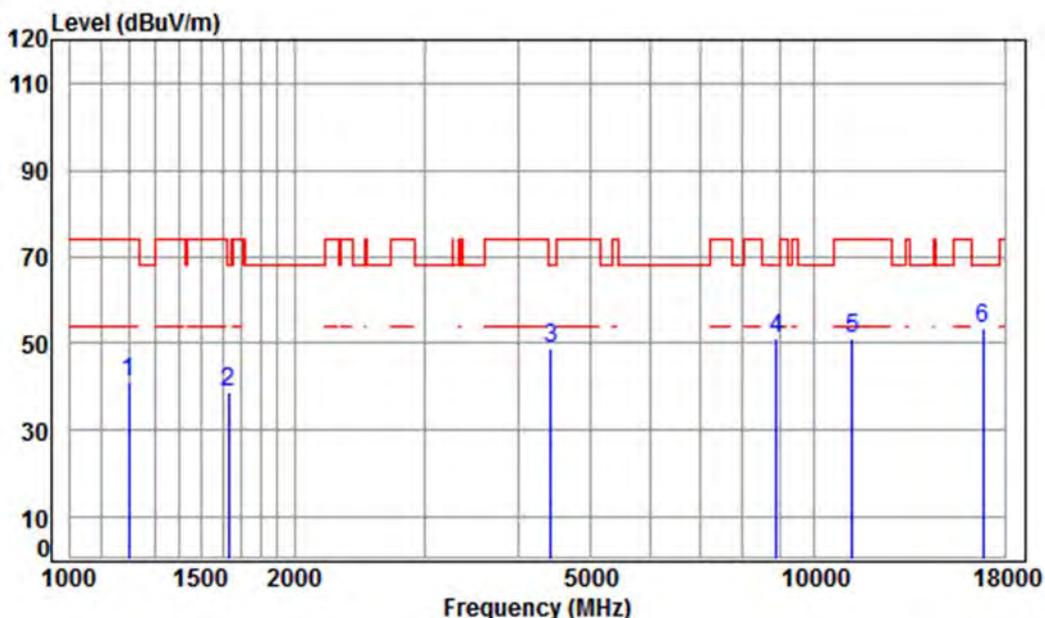

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5610 TX RSE

: Ant 1 5G WIFI 11AC(80) CH122

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	38.70	50.68	40.88	74.00	-33.12	peak
2	1634.543	5.31	26.40	38.70	45.58	38.59	68.20	-29.61	peak
3	4417.841	7.47	33.60	38.14	45.90	48.83	68.20	-19.37	peak
4	8891.725	10.37	36.47	38.21	42.43	51.06	68.20	-17.14	peak
5	11220.000	11.86	37.88	36.47	37.93	51.20	74.00	-22.80	peak
6	pp16830.000	15.97	42.77	38.13	32.73	53.34	68.20	-14.86	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5610	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

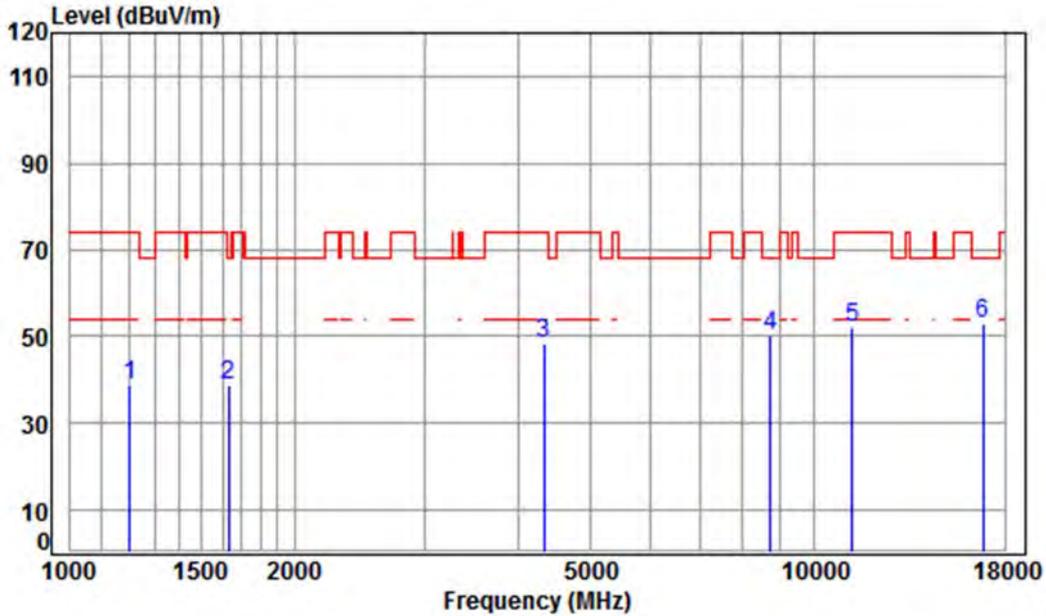

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5610 TX RSE

: Ant 1 5G WIFI 11AC(80) CH122

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	48.56	38.78	74.00	-35.22	peak
2	1629.825	5.31	26.38	38.70	45.76	38.75	68.20	-29.45	peak
3	4329.354	7.37	33.60	38.14	45.67	48.50	74.00	-25.50	peak
4	8713.630	10.33	36.26	38.23	41.83	50.19	68.20	-18.01	peak
5	11220.000	11.86	37.88	36.47	38.73	52.00	74.00	-22.00	peak
6	pp16830.000	15.97	42.77	38.13	32.10	52.71	68.20	-15.49	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Vertical
------------	----------------	-----------------	------	------	----------

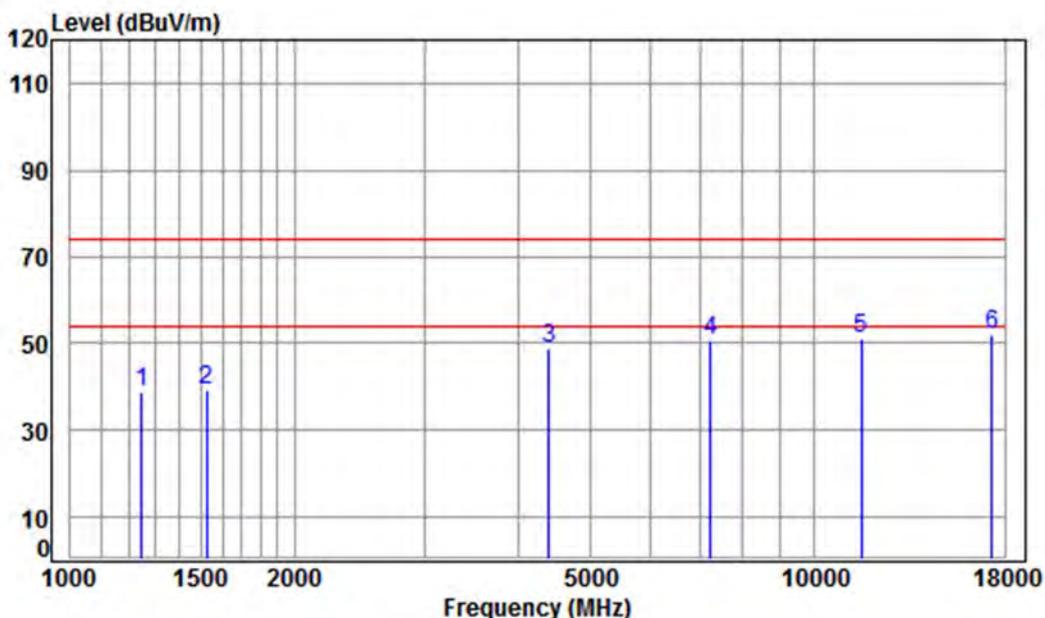

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5775 TX RSE

: Ant 1 5G WIFI 11AC(80) CH155

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.72	38.70	48.00	38.63	74.00	-35.37	peak
2	1525.000	5.45	25.91	38.70	46.54	39.20	74.00	-34.80	peak
3	4392.376	7.44	33.60	38.14	45.79	48.69	74.00	-25.31	peak
4	7242.052	10.07	36.40	38.23	42.20	50.44	74.00	-23.56	peak
5	11550.000	12.16	38.15	36.57	37.57	51.31	74.00	-22.69	peak
6	pp17325.000	15.98	43.19	38.10	30.91	51.98	74.00	-22.02	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5775	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

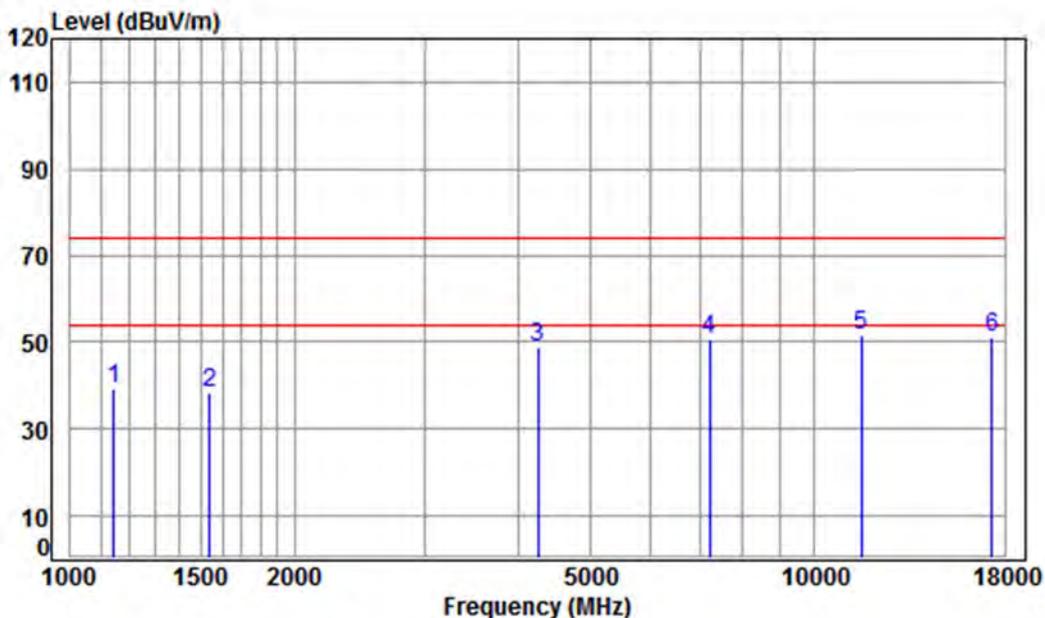

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5775 TX RSE

: Ant 1 5G WIFI 11AC(80) CH155


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.58	39.28	74.00	-34.72	peak
2	1538.281	5.43	25.98	38.70	45.68	38.39	74.00	-35.61	peak
3	4254.921	7.28	33.60	38.13	45.99	48.74	74.00	-25.26	peak
4	7221.150	10.07	36.41	38.22	42.47	50.73	74.00	-23.27	peak
5	pp11550.000	12.16	38.15	36.57	37.97	51.71	74.00	-22.29	peak
6	17325.000	15.98	43.19	38.10	30.05	51.12	74.00	-22.88	peak



ANT2

Test plot as follows:

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Vertical
------------	---------	-----------------	------	------	----------

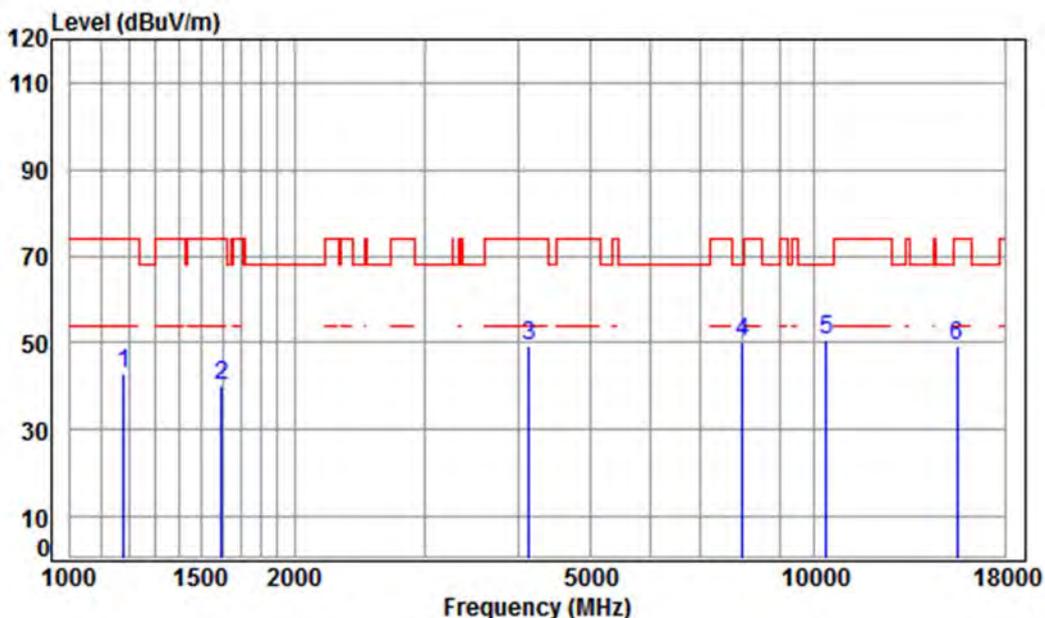

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5180 TX RSE

: Ant 2 5G WIFI 11A CH36

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1179.100	4.33	24.38	38.70	52.90	42.91	74.00	-31.09 peak
2	1597.181	5.35	26.24	38.70	47.17	40.06	74.00	-33.94 peak
3	4133.699	7.14	33.60	38.11	46.52	49.15	74.00	-24.85 peak
4	7989.893	9.95	36.59	38.30	42.11	50.35	68.20	-17.85 peak
5	pp10360.000	11.19	37.24	36.34	38.71	50.80	68.20	-17.40 peak
6	15540.000	14.30	41.38	38.12	31.69	49.25	74.00	-24.75 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180100021702

Page: 141 of 817

Test mode:	802.11a	Frequency(MHz):	5180	Peak	Horizontal
------------	---------	-----------------	------	------	------------

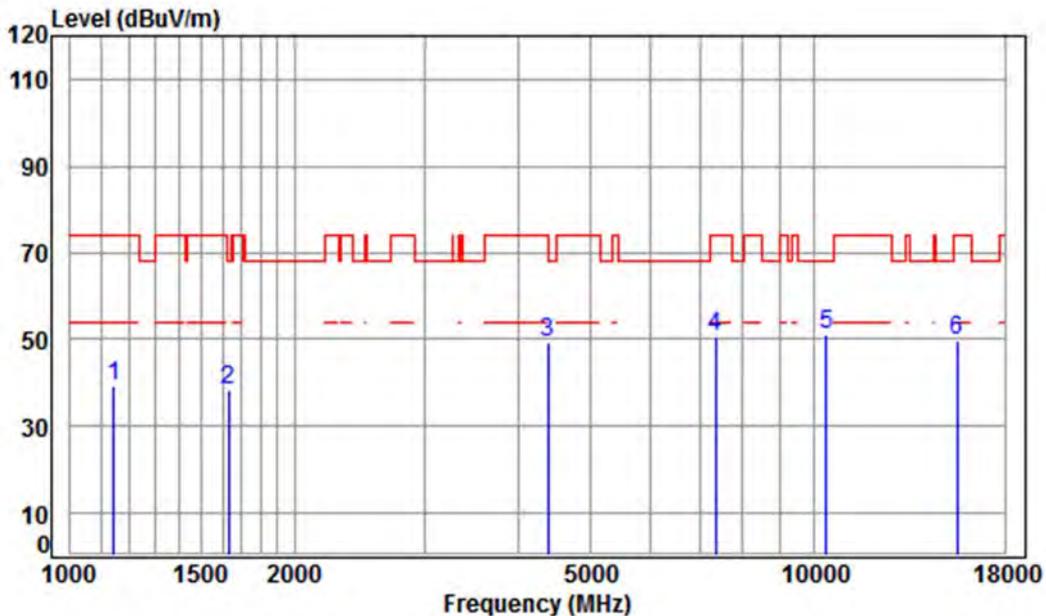


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5180 TX RSE
 : Ant 2 5G WIFI 11A CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.36	39.06	74.00	-34.94	peak
2	1629.825	5.31	26.38	38.70	45.31	38.30	68.20	-29.90	peak
3	4379.699	7.43	33.60	38.14	46.27	49.16	74.00	-24.84	peak
4	7368.741	10.03	36.35	38.24	42.63	50.77	74.00	-23.23	peak
5	pp10360.000	11.19	37.24	36.34	38.88	50.97	68.20	-17.23	peak
6	15540.000	14.30	41.38	38.12	32.14	49.70	74.00	-24.30	peak



Test mode:	802.11a	Frequency(MHz):	5220	Peak	Vertical
------------	---------	-----------------	------	------	----------

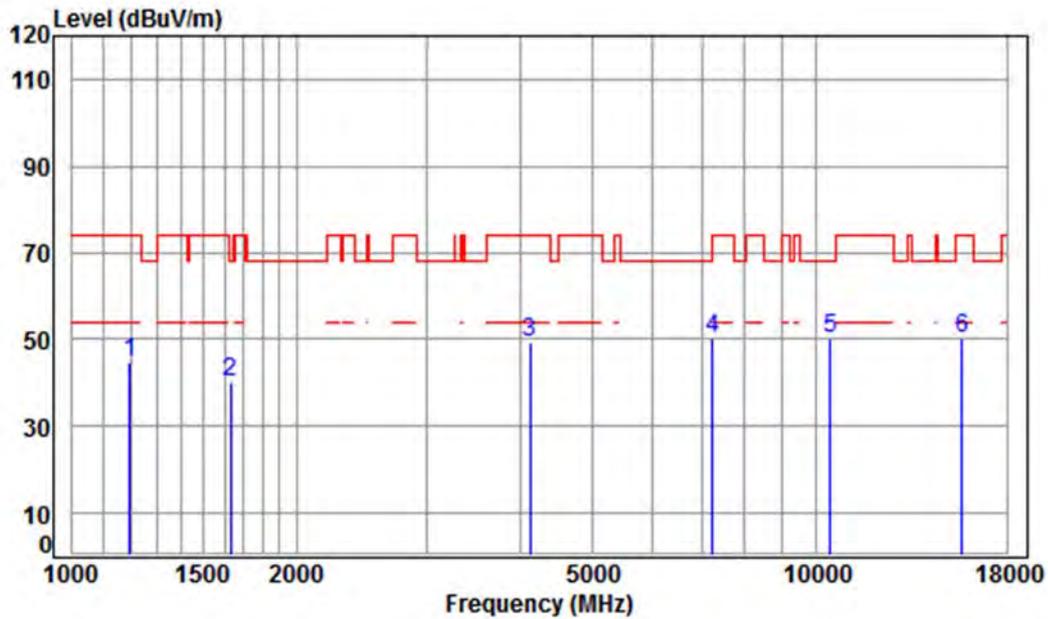


Condition: 3m VERTICAL
Job No : 0217RG
Mode : 5220 TX RSE
: Ant 2 5G WIFI 11A CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	38.70	54.39	44.55	74.00	-29.45 peak
2	1629.825	5.31	26.38	38.70	47.26	40.25	68.20	-27.95 peak
3	4121.768	7.13	33.60	38.11	46.49	49.11	74.00	-24.89 peak
4 pp	7242.052	10.07	36.40	38.23	42.07	50.31	68.20	-17.89 peak
5	10440.000	11.25	37.16	36.35	37.92	49.98	68.20	-18.22 peak
6	15660.000	14.48	41.34	38.03	32.55	50.34	74.00	-23.66 peak



Test mode:	802.11a	Frequency(MHz):	5220	Peak	Horizontal
------------	---------	-----------------	------	------	------------

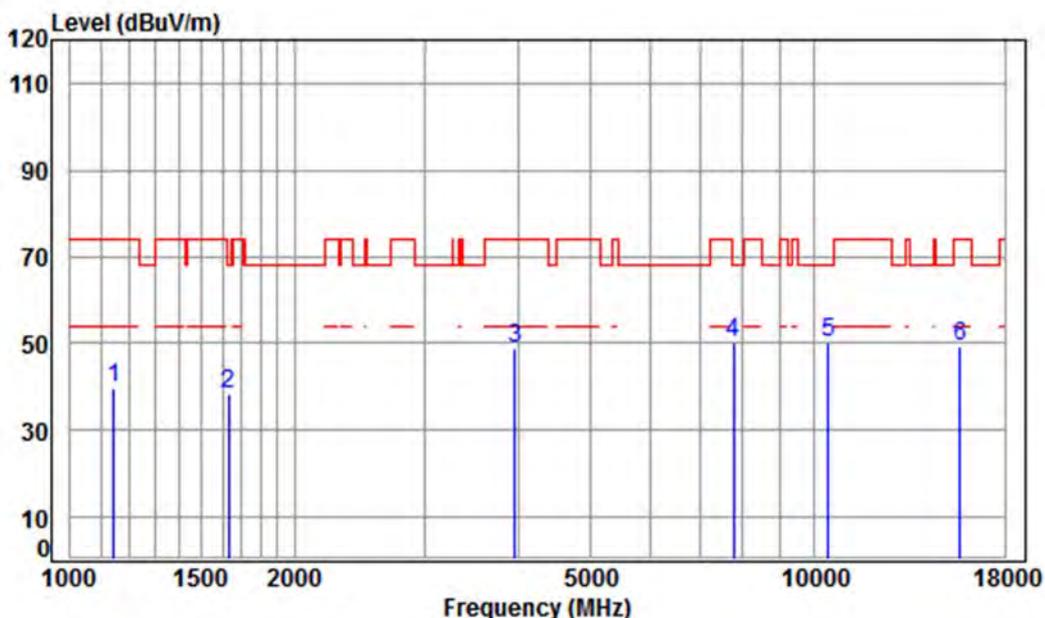


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5220 TX RSE
 : Ant 2 5G WIFI 11A CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	50.03	39.73	74.00	-34.27 peak
2	1634.543	5.31	26.40	38.70	45.49	38.50	68.20	-29.70 peak
3	3958.309	6.94	33.49	38.09	46.53	48.87	74.00	-25.13 peak
4 pp	7784.729	9.97	36.47	38.28	42.19	50.35	68.20	-17.85 peak
5	10440.000	11.25	37.16	36.35	38.08	50.14	68.20	-18.06 peak
6	15660.000	14.48	41.34	38.03	31.51	49.30	74.00	-24.70 peak



Test mode:	802.11a	Frequency(MHz):	5240	Peak	Vertical
------------	---------	-----------------	------	------	----------

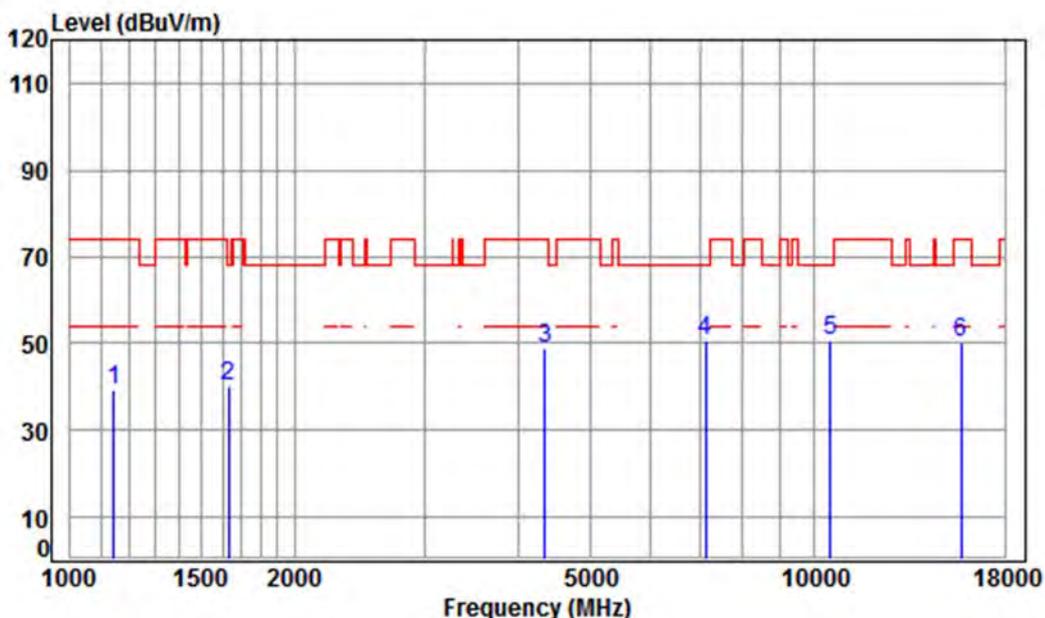

Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5240 TX RSE
 : Ant 2 5G WIFI 11A CH48

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.35	39.05	74.00	-34.95	peak
2	1629.825	5.31	26.38	38.70	47.13	40.12	68.20	-28.08	peak
3	4341.886	7.38	33.60	38.14	45.82	48.66	74.00	-25.34	peak
4	pp 7138.144	10.09	36.44	38.21	42.32	50.64	68.20	-17.56	peak
5	10480.000	11.28	37.12	36.35	38.53	50.58	68.20	-17.62	peak
6	15720.000	14.57	41.31	37.99	32.27	50.16	74.00	-23.84	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 145 of 817

Test mode:	802.11a	Frequency(MHz):	5240	Peak	Horizontal
------------	---------	-----------------	------	------	------------

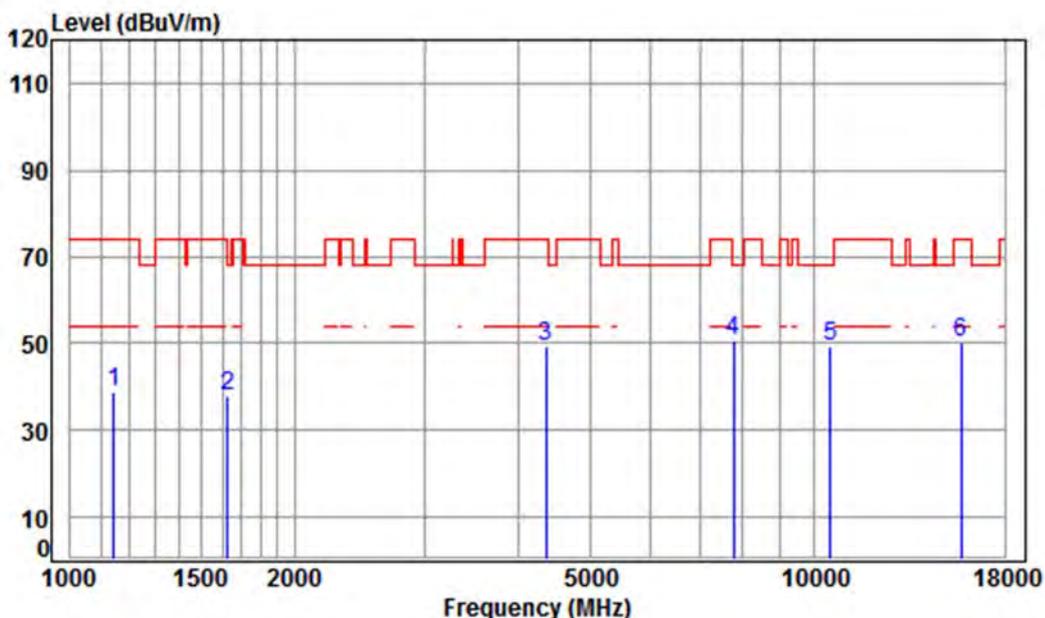


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5240 TX RSE
 : Ant 2 5G WIFI 11A CH48

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.16	38.86	74.00	-35.14	peak
2	1625.121	5.32	26.36	38.70	45.03	38.01	74.00	-35.99	peak
3	4354.454	7.40	33.60	38.14	46.40	49.26	74.00	-24.74	peak
4 pp	7784.729	9.97	36.47	38.28	42.34	50.50	68.20	-17.70	peak
5	10480.000	11.28	37.12	36.35	37.31	49.36	68.20	-18.84	peak
6	15720.000	14.57	41.31	37.99	32.35	50.24	74.00	-23.76	peak

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Test mode:	802.11a	Frequency(MHz):	5260	Peak	Vertical
------------	---------	-----------------	------	------	----------

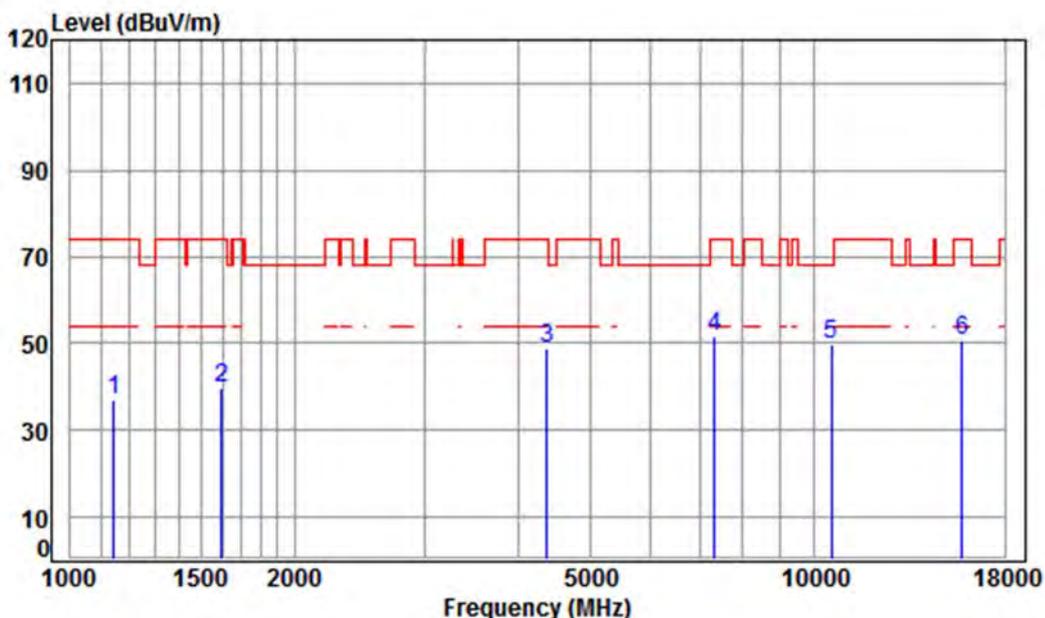


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5260 TX RSE
 : Ant 2 5G WIFI 11A CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.43	37.13	74.00	-36.87	peak
2	1597.181	5.35	26.24	38.70	46.92	39.81	74.00	-34.19	peak
3	4367.058	7.41	33.60	38.14	46.02	48.89	74.00	-25.11	peak
4	7347.474	10.04	36.36	38.24	43.19	51.35	74.00	-22.65	peak
5	pp10520.000	11.30	37.12	36.35	37.89	49.96	68.20	-18.24	peak
6	15780.000	14.66	41.29	37.95	32.45	50.45	74.00	-23.55	peak



Test mode:	802.11a	Frequency(MHz):	5260	Peak	Horizontal
------------	---------	-----------------	------	------	------------

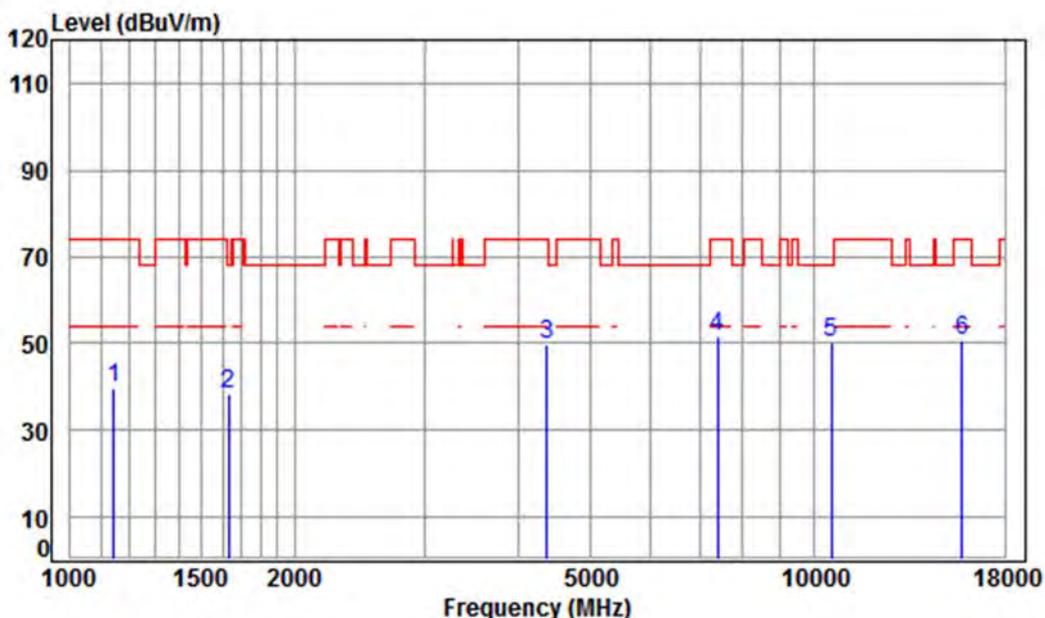

Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5260 TX RSE
 : Ant 2 5G WIFI 11A CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.86	39.56	74.00	-34.44	peak
2	1629.825	5.31	26.38	38.70	45.25	38.24	68.20	-29.96	peak
3	4367.058	7.41	33.60	38.14	46.65	49.52	74.00	-24.48	peak
4	7411.461	10.02	36.33	38.24	43.34	51.45	74.00	-22.55	peak
5	pp10520.000	11.30	37.12	36.35	38.33	50.40	68.20	-17.80	peak
6	15780.000	14.66	41.29	37.95	32.66	50.66	74.00	-23.34	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 148 of 817

Test mode:	802.11a	Frequency(MHz):	5300	Peak	Vertical
------------	---------	-----------------	------	------	----------

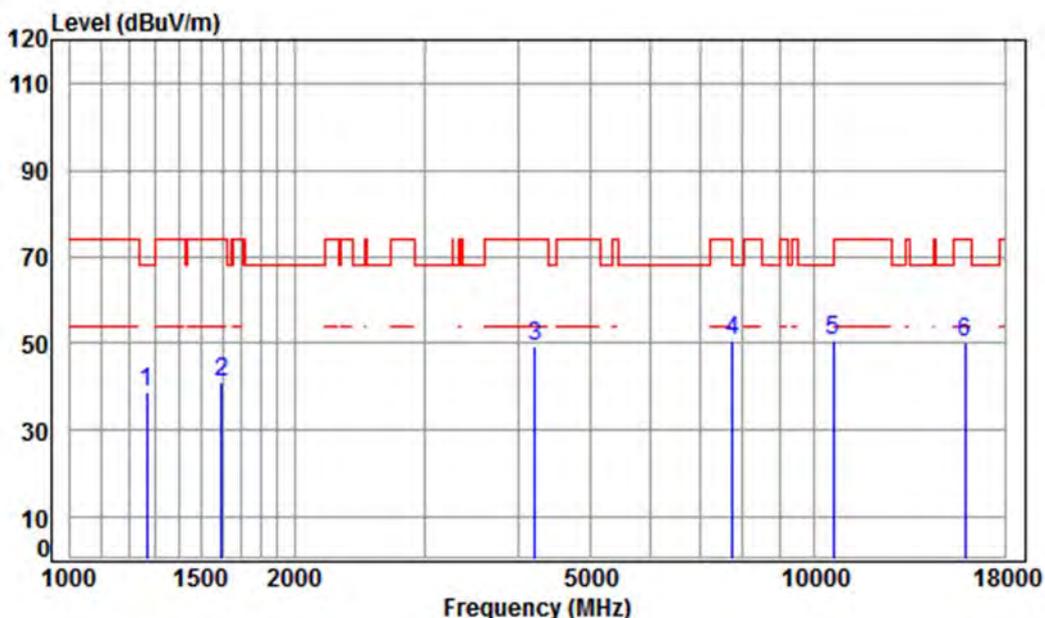


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5300 TX RSE
 : Ant 2 5G WIFI 11A CH60

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1267.454	4.68	24.80	38.70	48.02	38.80	68.20	-29.40	peak
2	1597.181	5.35	26.24	38.70	48.37	41.26	74.00	-32.74	peak
3	4206.011	7.23	33.60	38.12	46.56	49.27	74.00	-24.73	peak
4	7762.260	9.97	36.46	38.28	42.32	50.47	68.20	-17.73	peak
5	pp10600.000	11.36	37.22	36.36	38.26	50.48	68.20	-17.72	peak
6	15900.000	14.84	41.24	37.87	31.84	50.05	74.00	-23.95	peak



Test mode:	802.11a	Frequency(MHz):	5300	Peak	Horizontal
------------	---------	-----------------	------	------	------------

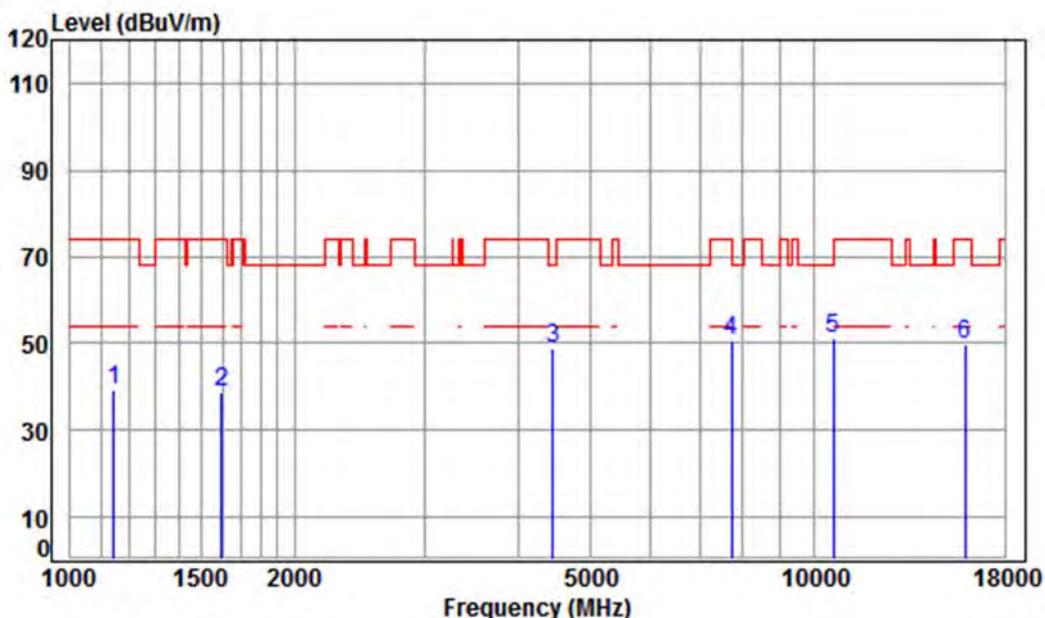


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5300 TX RSE
 : Ant 2 5G WIFI 11A CH60

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.67	39.37	74.00	-34.63	peak
2	1597.181	5.35	26.24	38.70	45.82	38.71	74.00	-35.29	peak
3	4456.315	7.51	33.60	38.15	45.76	48.72	68.20	-19.48	peak
4	7739.857	9.98	36.45	38.28	42.48	50.63	74.00	-23.37	peak
5	pp10600.000	11.36	37.22	36.36	38.82	51.04	68.20	-17.16	peak
6	15900.000	14.84	41.24	37.87	31.71	49.92	74.00	-24.08	peak



Test mode:	802.11a	Frequency(MHz):	5320	Peak	Vertical
------------	---------	-----------------	------	------	----------

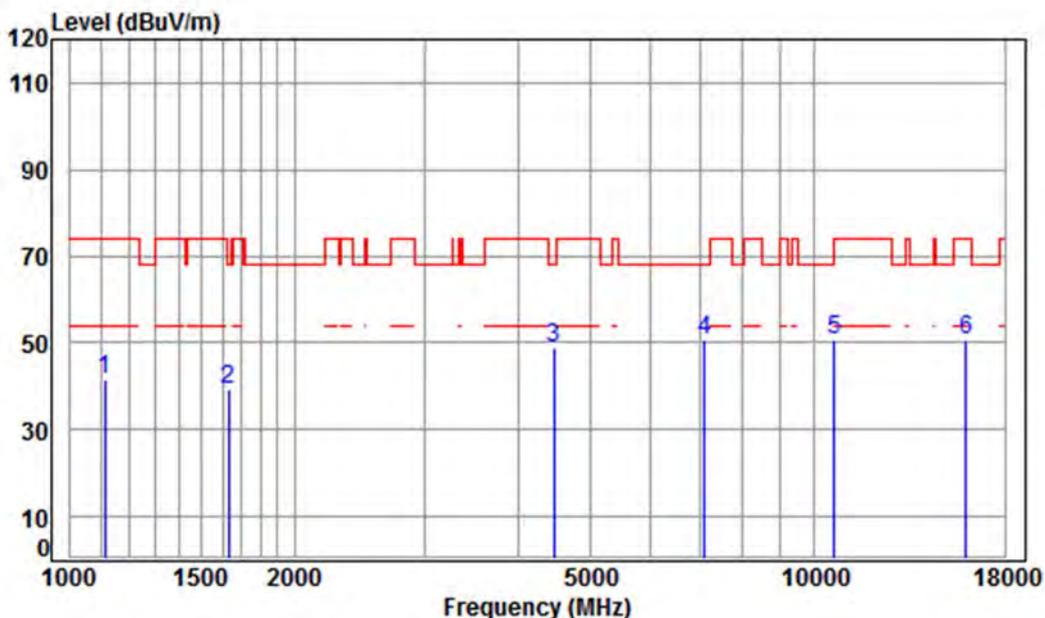

Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5320 TX RSE
 : Ant 2 5G WIFI 11A CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1112.872	4.06	24.03	38.70	52.03	41.42	74.00	-32.58 peak
2	1629.825	5.31	26.38	38.70	46.14	39.13	68.20	-29.07 peak
3	4469.214	7.53	33.60	38.15	45.86	48.84	68.20	-19.36 peak
4 pp	7117.542	10.10	36.45	38.21	42.23	50.57	68.20	-17.63 peak
5	10640.000	11.39	37.27	36.37	38.42	50.71	74.00	-23.29 peak
6	15960.000	14.93	41.22	37.83	32.37	50.69	74.00	-23.31 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180100021702

Page: 151 of 817

Test mode:	802.11a	Frequency(MHz):	5320	Peak	Horizontal
------------	---------	-----------------	------	------	------------

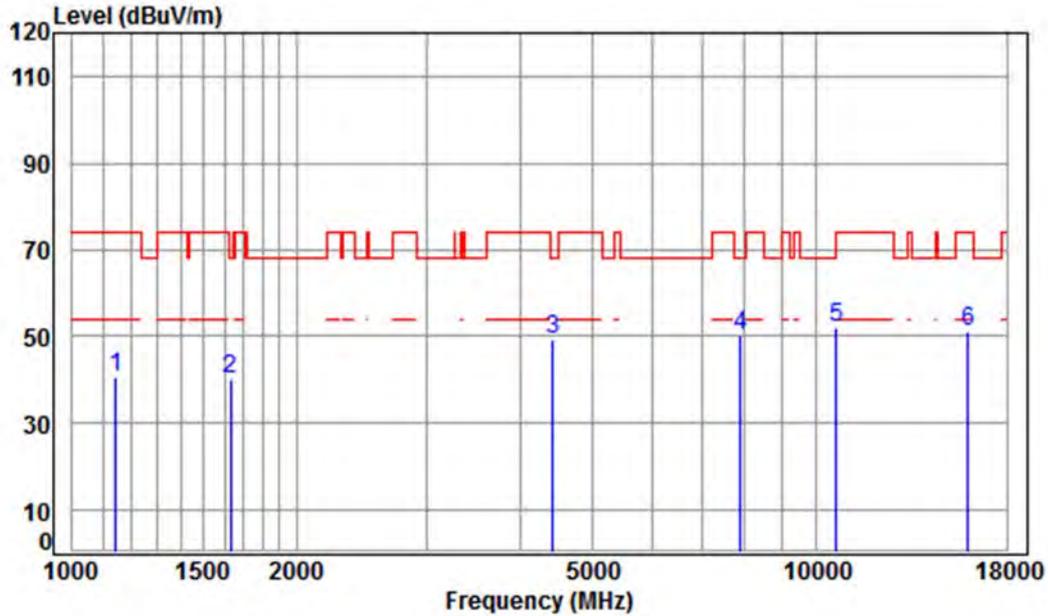


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5320 TX RSE
 : Ant 2 5G WIFI 11A CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.73	40.43	74.00	-33.57	peak
2	1634.543	5.31	26.40	38.70	46.96	39.97	68.20	-28.23	peak
3	4417.841	7.47	33.60	38.14	46.38	49.31	68.20	-18.89	peak
4 pp	7898.049	9.96	36.54	38.29	41.96	50.17	68.20	-18.03	peak
5	10640.000	11.39	37.27	36.37	39.70	51.99	74.00	-22.01	peak
6	15960.000	14.93	41.22	37.83	32.84	51.16	74.00	-22.84	peak



Test mode:	802.11a	Frequency(MHz):	5500	Peak	Vertical
------------	---------	-----------------	------	------	----------

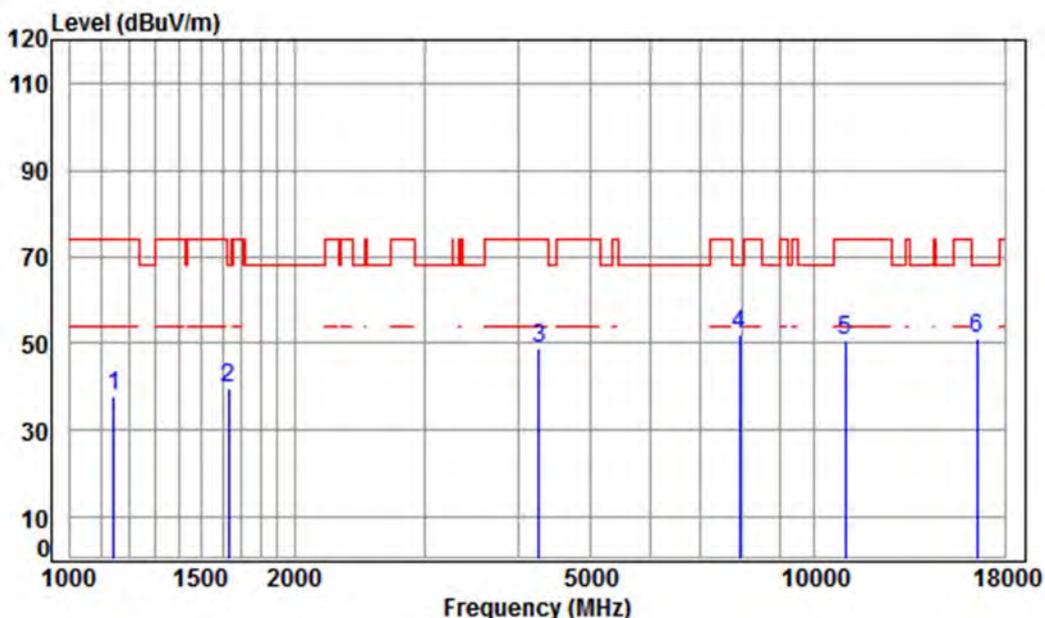


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5500 TX RSE
 : Ant 2 5G WIFI 11A CH100

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	48.02	37.72	74.00	-36.28 peak
2	1634.543	5.31	26.40	38.70	46.79	39.80	68.20	-28.40 peak
3	4267.237	7.30	33.60	38.13	45.83	48.60	74.00	-25.40 peak
4	pp 7920.911	9.96	36.55	38.29	43.80	52.02	68.20	-16.18 peak
5	11000.000	11.63	37.70	36.40	37.70	50.63	74.00	-23.37 peak
6	16500.000	14.50	42.70	38.00	31.95	51.15	68.20	-17.05 peak



Test mode:	802.11a	Frequency(MHz):	5500	Peak	Horizontal
------------	---------	-----------------	------	------	------------

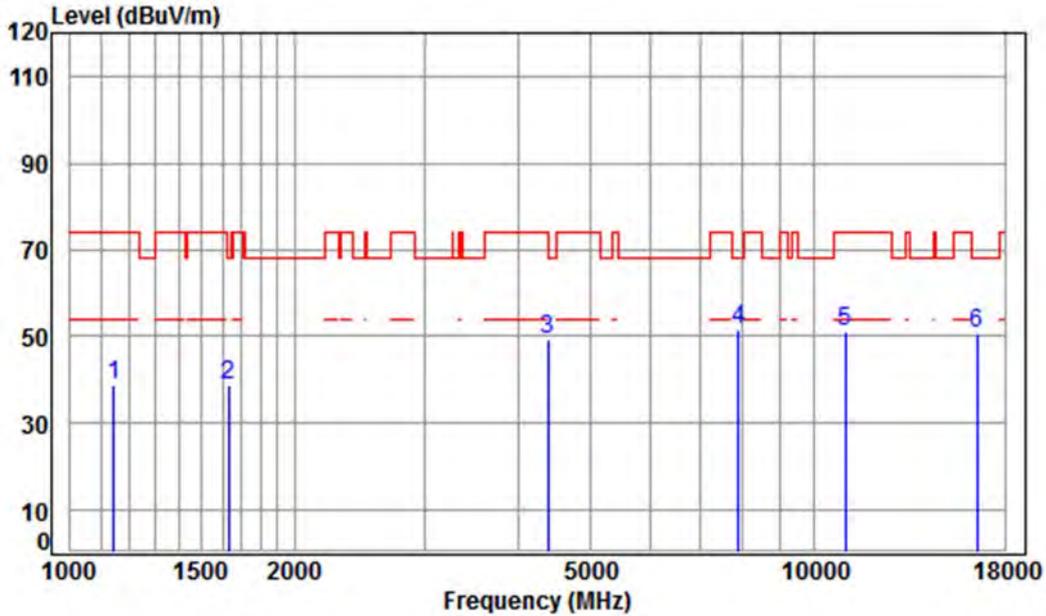


Condition: 3m HORIZONTAL
Job No : 0217RG
Mode : 5500 TX RSE
: Ant 2 5G WIFI 11A CH100

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.25	38.95	74.00	-35.05 peak
2	1634.543	5.31	26.40	38.70	45.57	38.58	68.20	-29.62 peak
3	4379.699	7.43	33.60	38.14	46.27	49.16	74.00	-24.84 peak
4 pp	7898.049	9.96	36.54	38.29	43.13	51.34	68.20	-16.86 peak
5	11000.000	11.63	37.70	36.40	38.06	50.99	74.00	-23.01 peak
6	16500.000	14.50	42.70	38.00	31.64	50.84	68.20	-17.36 peak



Test mode:	802.11a	Frequency(MHz):	5580	Peak	Vertical
------------	---------	-----------------	------	------	----------

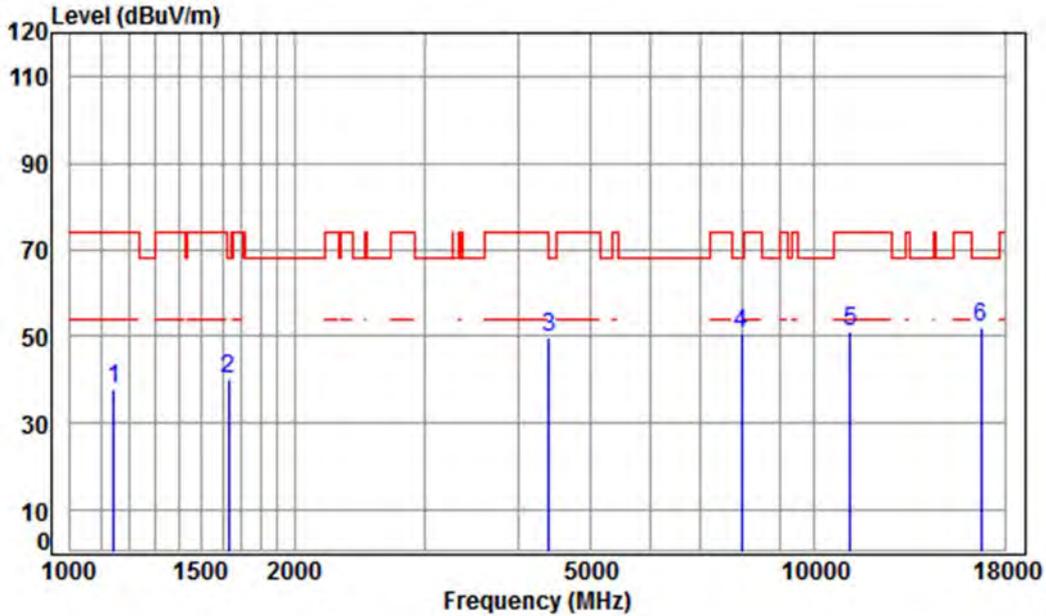


Condition: 3m VERTICAL
Job No : 0217RG
Mode : 5580 TX RSE
: Ant 2 5G WIFI 11A CH116

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	48.29	37.99	74.00	-36.01 peak
2	1634.543	5.31	26.40	38.70	47.13	40.14	68.20	-28.06 peak
3	4392.376	7.44	33.60	38.14	46.75	49.65	74.00	-24.35 peak
4	7966.832	9.95	36.58	38.30	42.50	50.73	68.20	-17.47 peak
5	11160.000	11.80	37.83	36.45	37.74	50.92	74.00	-23.08 peak
6	pp16740.000	15.57	42.75	38.10	31.77	51.99	68.20	-16.21 peak



Test mode:	802.11a	Frequency(MHz):	5580	Peak	Horizontal
------------	---------	-----------------	------	------	------------

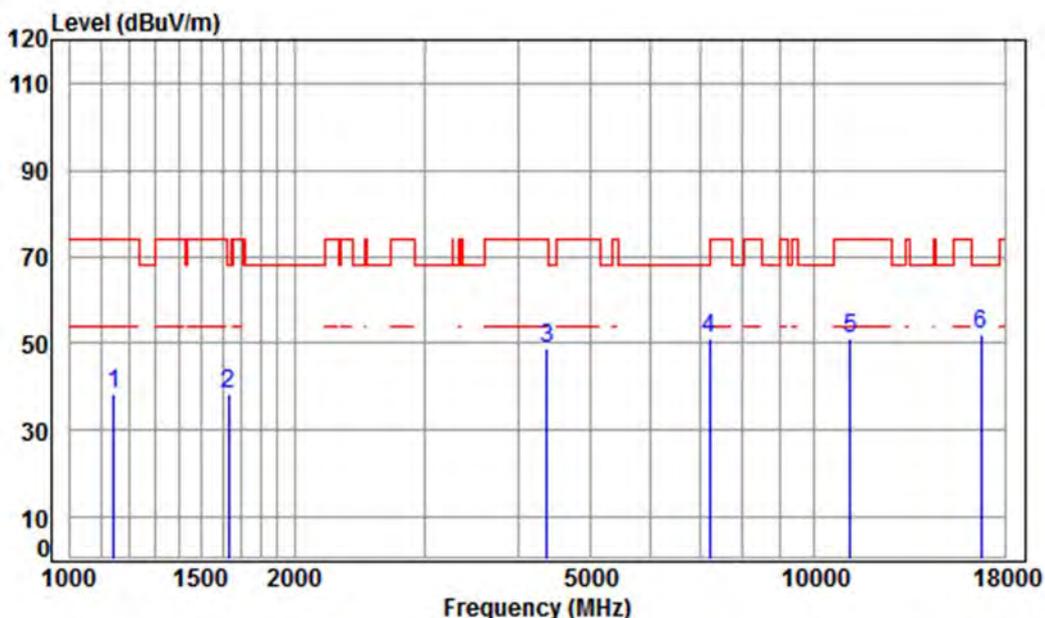


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5580 TX RSE
 : Ant 2 5G WIFI 11A CH116

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.66	38.36	74.00	-35.64	peak
2	1629.825	5.31	26.38	38.70	45.13	38.12	68.20	-30.08	peak
3	4367.058	7.41	33.60	38.14	46.03	48.90	74.00	-25.10	peak
4	7221.150	10.07	36.41	38.22	42.97	51.23	68.20	-16.97	peak
5	11160.000	11.80	37.83	36.45	37.85	51.03	74.00	-22.97	peak
6	pp16740.000	15.57	42.75	38.10	31.74	51.96	68.20	-16.24	peak



Test mode:	802.11a	Frequency(MHz):	5700	Peak	Vertical
------------	---------	-----------------	------	------	----------

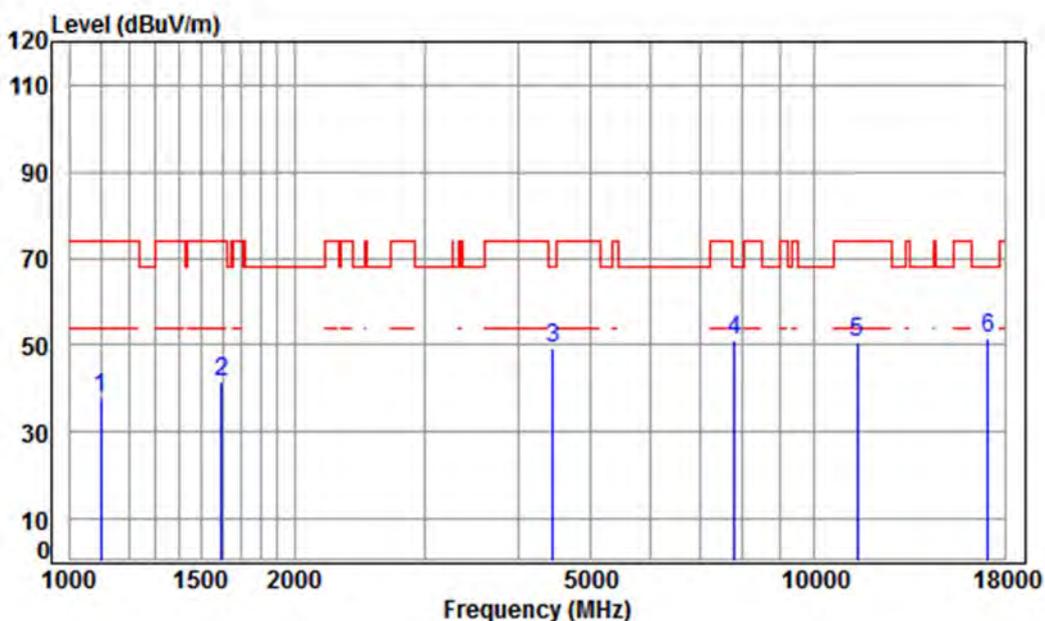

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5700 TX RSE

: Ant 2 5G WIFI 11A CH140

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1100.079	4.00	23.96	38.70	48.48	37.74	74.00	-36.26 peak
2	1597.181	5.35	26.24	38.70	48.40	41.29	74.00	-32.71 peak
3	4456.315	7.51	33.60	38.15	46.48	49.44	68.20	-18.76 peak
4	7807.262	9.97	36.49	38.28	42.89	51.07	68.20	-17.13 peak
5	11400.000	12.04	38.02	36.52	37.08	50.62	74.00	-23.38 peak
6	pp17100.000	16.49	42.92	38.17	30.44	51.68	68.20	-16.52 peak



Test mode:	802.11a	Frequency(MHz):	5700	Peak	Horizontal
------------	---------	-----------------	------	------	------------

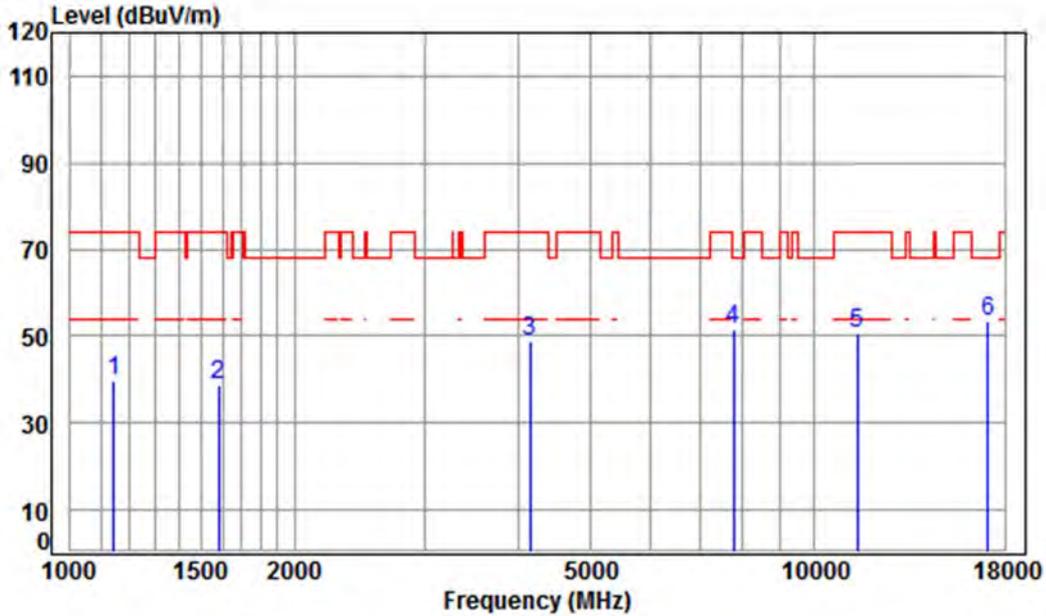


Condition: 3m HORIZONTAL
Job No : 0217RG
Mode : 5700 TX RSE
: Ant 2 5G WIFI 11A CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.04	39.74	74.00	-34.26	peak
2	1583.392	5.37	26.18	38.70	46.00	38.85	74.00	-35.15	peak
3	4145.664	7.16	33.60	38.12	46.14	48.78	74.00	-25.22	peak
4	7784.729	9.97	36.47	38.28	43.27	51.43	68.20	-16.77	peak
5	11400.000	12.04	38.02	36.52	36.93	50.47	74.00	-23.53	peak
6	pp17100.000	16.49	42.92	38.17	32.28	53.52	68.20	-14.68	peak



Test mode:	802.11a	Frequency(MHz):	5745	Peak	Vertical
------------	---------	-----------------	------	------	----------

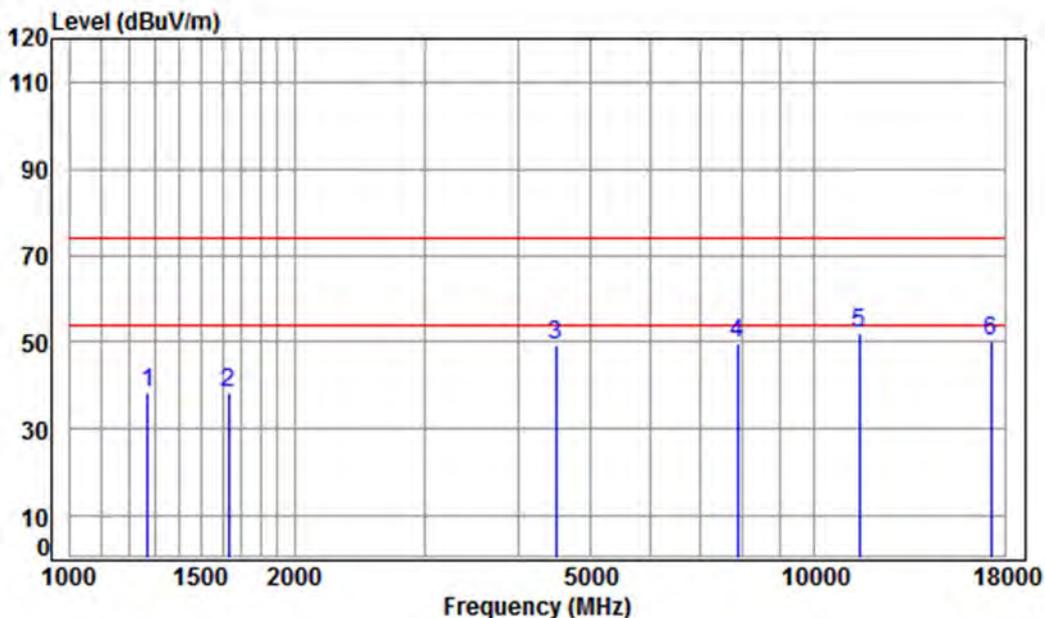

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5745 TX RSE

: Ant 2 5G WIFI 11A CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1271.123	4.69	24.82	38.70	47.55	38.36	74.00	-35.64	peak
2	1634.543	5.31	26.40	38.70	45.12	38.13	74.00	-35.87	peak
3	4495.125	7.55	33.60	38.15	46.14	49.14	74.00	-24.86	peak
4	7875.254	9.96	36.53	38.29	41.68	49.88	74.00	-24.12	peak
5	pp11490.000	12.13	38.09	36.55	38.28	51.95	74.00	-22.05	peak
6	17235.000	16.18	43.08	38.13	29.03	50.16	74.00	-23.84	peak



Test mode:	802.11a	Frequency(MHz):	5745	Peak	Horizontal
------------	---------	-----------------	------	------	------------

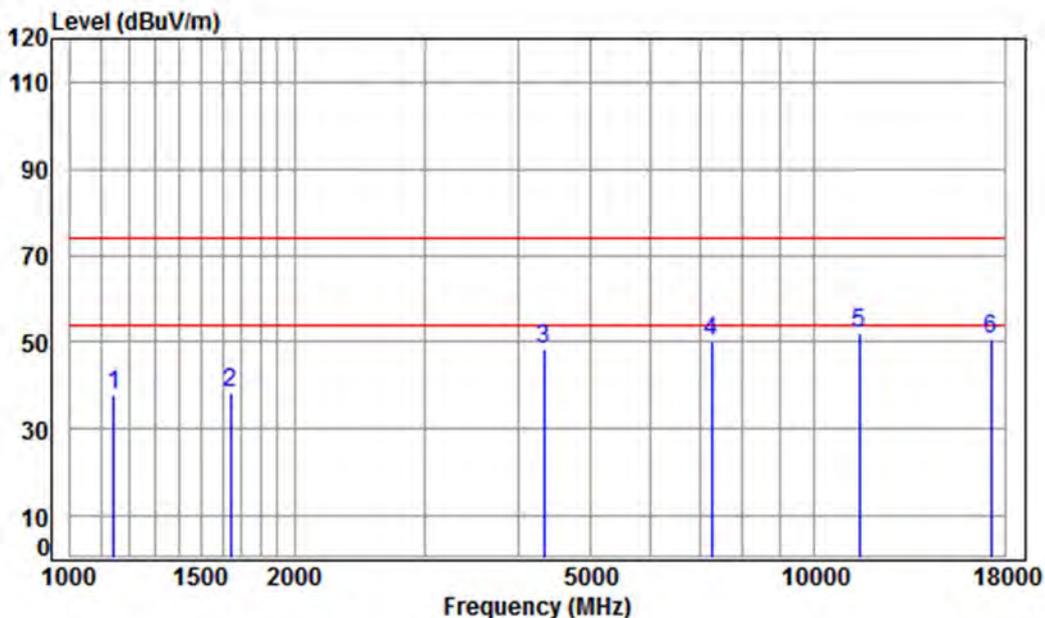

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5745 TX RSE

: Ant 2 5G WIFI 11A CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.97	37.67	74.00	-36.33	peak
2	1644.019	5.30	26.44	38.70	45.14	38.18	74.00	-35.82	peak
3	4329.354	7.37	33.60	38.14	45.52	48.35	74.00	-25.65	peak
4	7263.015	10.06	36.39	38.23	41.91	50.13	74.00	-23.87	peak
5	pp11490.000	12.13	38.09	36.55	38.23	51.90	74.00	-22.10	peak
6	17235.000	16.18	43.08	38.13	29.63	50.76	74.00	-23.24	peak



Test mode:	802.11a	Frequency(MHz):	5785	Peak	Vertical
------------	---------	-----------------	------	------	----------

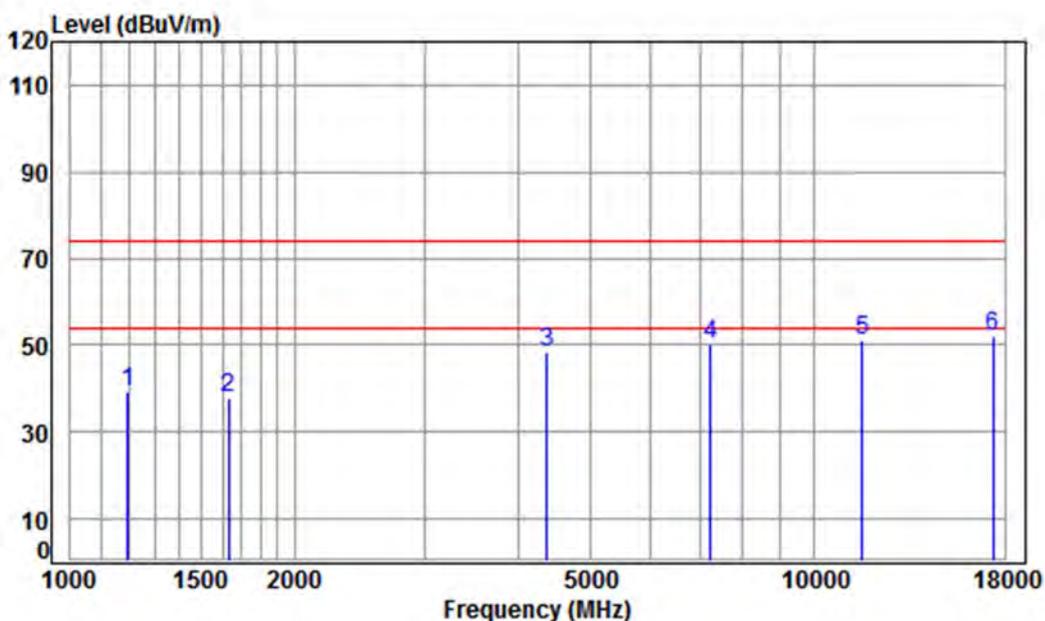

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5785 TX RSE

: Ant 2 5G WIFI 11A CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	49.06	39.22	74.00	-34.78	peak
2	1629.825	5.31	26.38	38.70	44.92	37.91	74.00	-36.09	peak
3	4367.058	7.41	33.60	38.14	45.64	48.51	74.00	-25.49	peak
4	7242.052	10.07	36.40	38.23	41.77	50.01	74.00	-23.99	peak
5	11570.000	12.17	38.17	36.57	37.15	50.92	74.00	-23.08	peak
6	pp17355.000	15.92	43.23	38.09	31.12	52.18	74.00	-21.82	peak



Test mode:	802.11a	Frequency(MHz):	5785	Peak	Horizontal
------------	---------	-----------------	------	------	------------

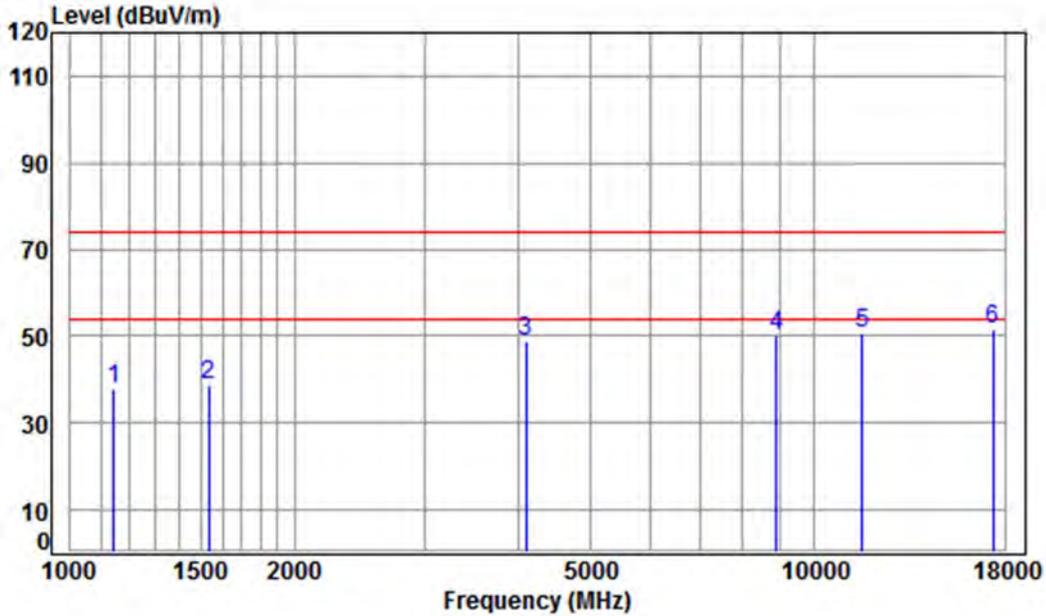

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5785 TX RSE

: Ant 2 5G WIFI 11A CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.33	38.03	74.00	-35.97	peak
2	1533.841	5.44	25.96	38.70	46.17	38.87	74.00	-35.13	peak
3	4098.010	7.10	33.60	38.11	46.10	48.69	74.00	-25.31	peak
4	8891.725	10.37	36.47	38.21	41.52	50.15	74.00	-23.85	peak
5	11570.000	12.17	38.17	36.57	36.90	50.67	74.00	-23.33	peak
6	pp17355.000	15.92	43.23	38.09	30.47	51.53	74.00	-22.47	peak



Test mode:	802.11a	Frequency(MHz):	5825	Peak	Vertical
------------	---------	-----------------	------	------	----------

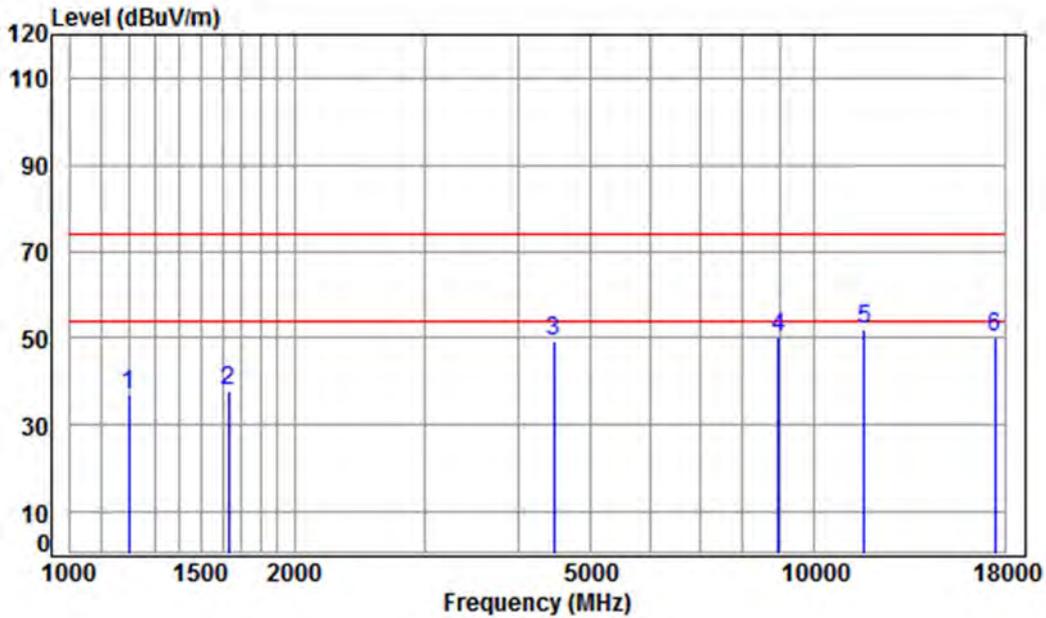

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5825 TX RSE

: Ant 2 5G WIFI 11A CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	38.70	46.91	37.11	74.00	-36.89	peak
2	1629.825	5.31	26.38	38.70	44.98	37.97	74.00	-36.03	peak
3	4469.214	7.53	33.60	38.15	46.11	49.09	74.00	-24.91	peak
4	8943.274	10.39	36.53	38.21	41.48	50.19	74.00	-23.81	peak
5	pp11650.000	12.20	38.25	36.60	37.95	51.80	74.00	-22.20	peak
6	17475.000	15.65	43.37	38.06	29.33	50.29	74.00	-23.71	peak



Test mode:	802.11a	Frequency(MHz):	5825	Peak	Horizontal
------------	---------	-----------------	------	------	------------

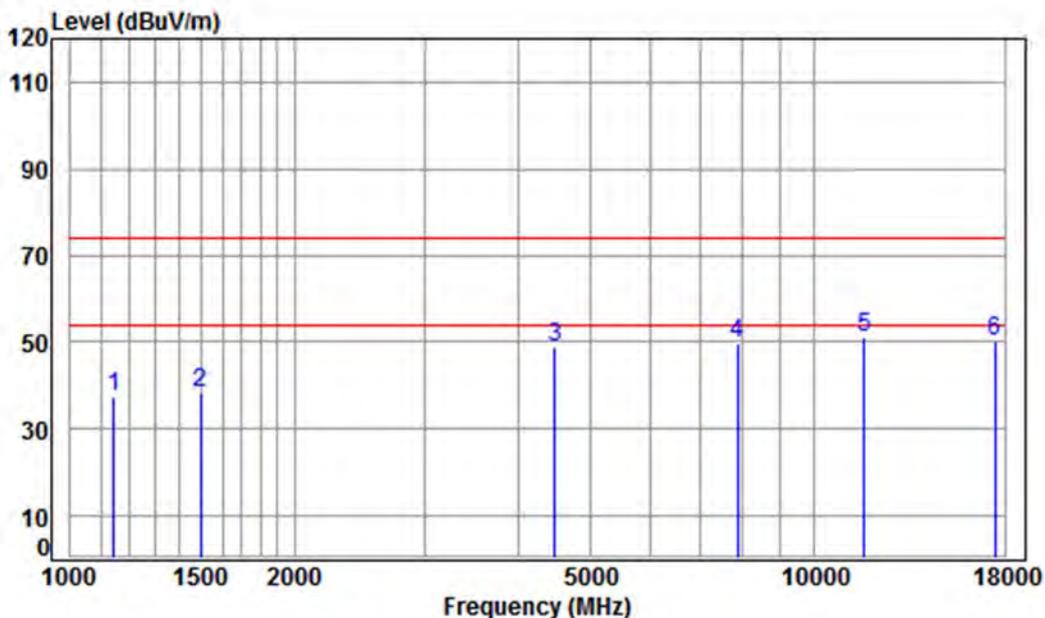

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5825 TX RSE

: Ant 2 5G WIFI 11A CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.79	37.49	74.00	-36.51	peak
2	1498.781	5.48	25.80	38.70	45.55	38.13	74.00	-35.87	peak
3	4482.150	7.54	33.60	38.15	45.63	48.62	74.00	-25.38	peak
4	7875.254	9.96	36.53	38.29	41.65	49.85	74.00	-24.15	peak
5	pp11650.000	12.20	38.25	36.60	37.44	51.29	74.00	-22.71	peak
6	17475.000	15.65	43.37	38.06	29.42	50.38	74.00	-23.62	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	---------------	-----------------	------	------	----------

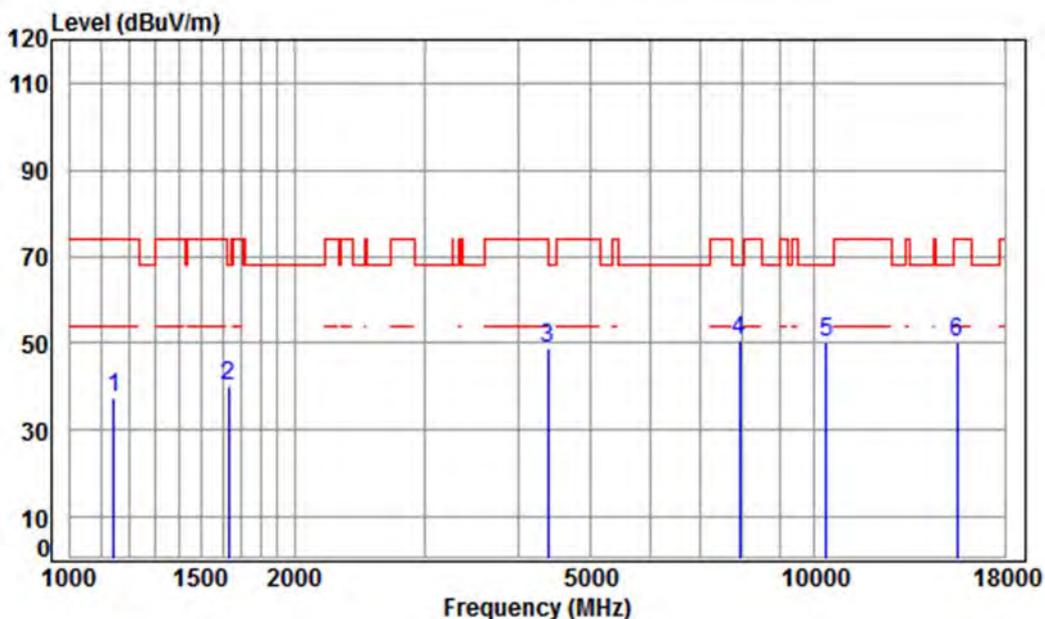


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5180 TX RSE
 : Ant 2 5G WIFI 11N CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.82	37.52	74.00	-36.48	peak
2	1634.543	5.31	26.40	38.70	47.20	40.21	68.20	-27.99	peak
3	4379.699	7.43	33.60	38.14	45.96	48.85	74.00	-25.15	peak
4 pp	7920.911	9.96	36.55	38.29	42.45	50.67	68.20	-17.53	peak
5	10360.000	11.19	37.24	36.34	38.03	50.12	68.20	-18.08	peak
6	15540.000	14.30	41.38	38.12	32.61	50.17	74.00	-23.83	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

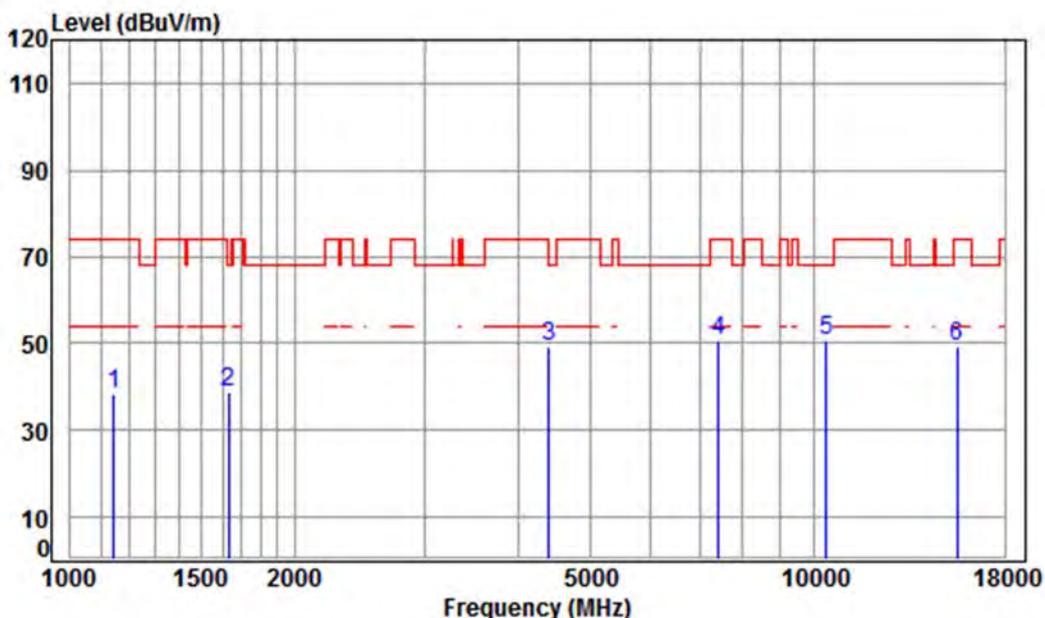


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5180 TX RSE
 : Ant 2 5G WIFI 11N CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	48.76	38.46	74.00	-35.54 peak
2	1634.543	5.31	26.40	38.70	45.94	38.95	68.20	-29.25 peak
3	4392.376	7.44	33.60	38.14	46.24	49.14	74.00	-24.86 peak
4	7432.914	10.02	36.33	38.24	42.48	50.59	74.00	-23.41 peak
5	pp10360.000	11.19	37.24	36.34	38.71	50.80	68.20	-17.40 peak
6	15540.000	14.30	41.38	38.12	31.79	49.35	74.00	-24.65 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5220	Peak	Vertical
------------	---------------	-----------------	------	------	----------

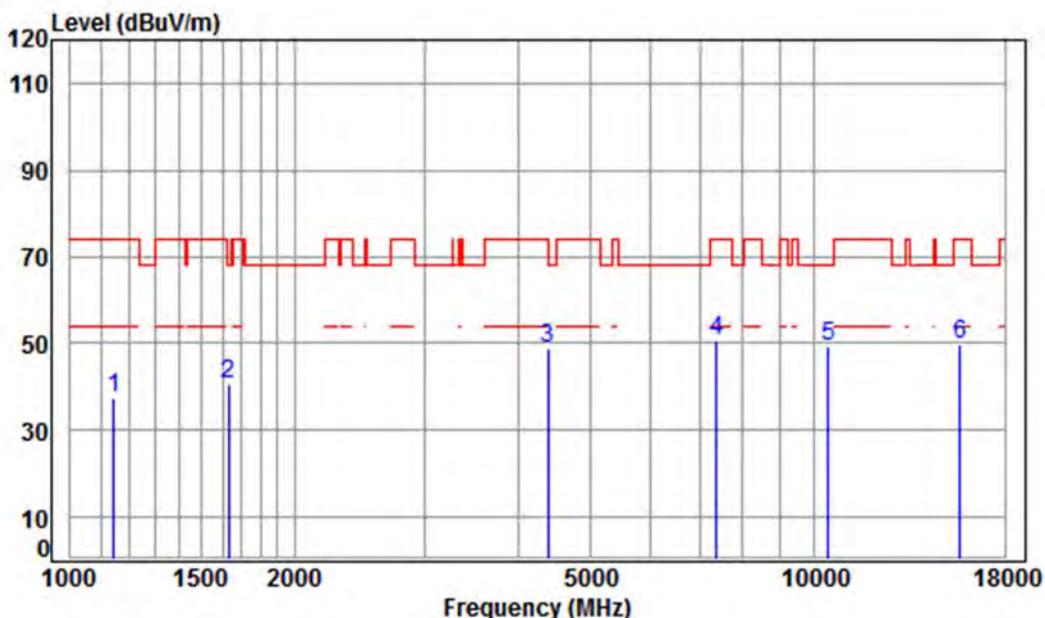


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5220 TX RSE
 : Ant 2 5G WIFI 11N CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.70	37.40	74.00	-36.60 peak
2	1629.825	5.31	26.38	38.70	47.39	40.38	68.20	-27.82 peak
3	4379.699	7.43	33.60	38.14	46.12	49.01	74.00	-24.99 peak
4	7390.070	10.03	36.34	38.24	42.53	50.66	74.00	-23.34 peak
5	pp10440.000	11.25	37.16	36.35	37.39	49.45	68.20	-18.75 peak
6	15660.000	14.48	41.34	38.03	31.80	49.59	74.00	-24.41 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5220	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

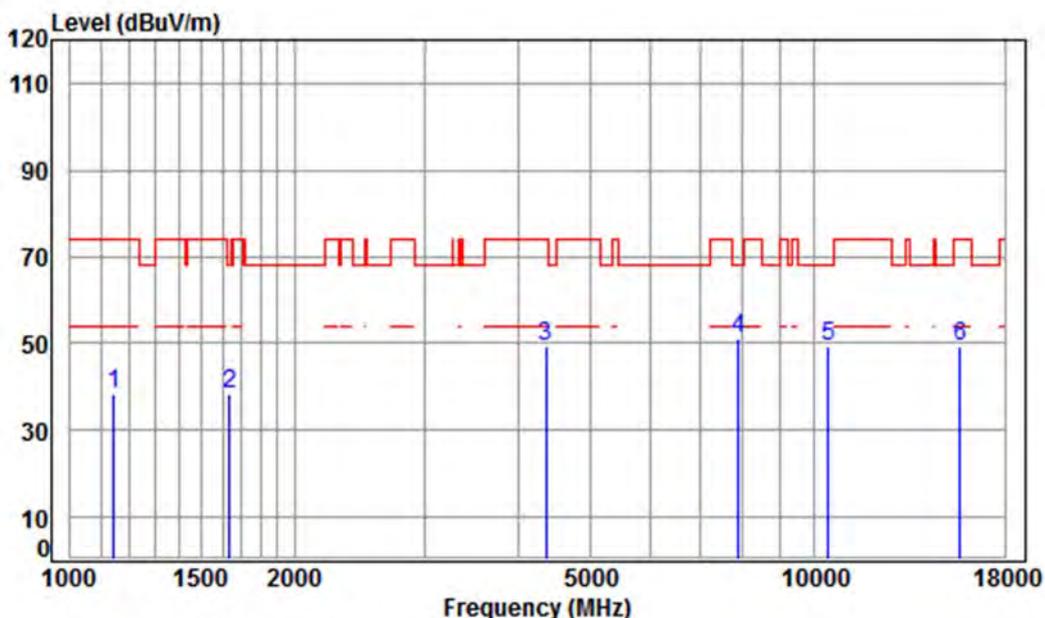


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5220 TX RSE
 : Ant 2 5G WIFI 11N CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	48.65	38.35	74.00	-35.65 peak
2	1639.274	5.30	26.42	38.70	45.46	38.48	68.20	-29.72 peak
3	4354.454	7.40	33.60	38.14	46.64	49.50	74.00	-24.50 peak
4 pp	7898.049	9.96	36.54	38.29	42.86	51.07	68.20	-17.13 peak
5	10440.000	11.25	37.16	36.35	37.43	49.49	68.20	-18.71 peak
6	15660.000	14.48	41.34	38.03	31.61	49.40	74.00	-24.60 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	---------------	-----------------	------	------	----------

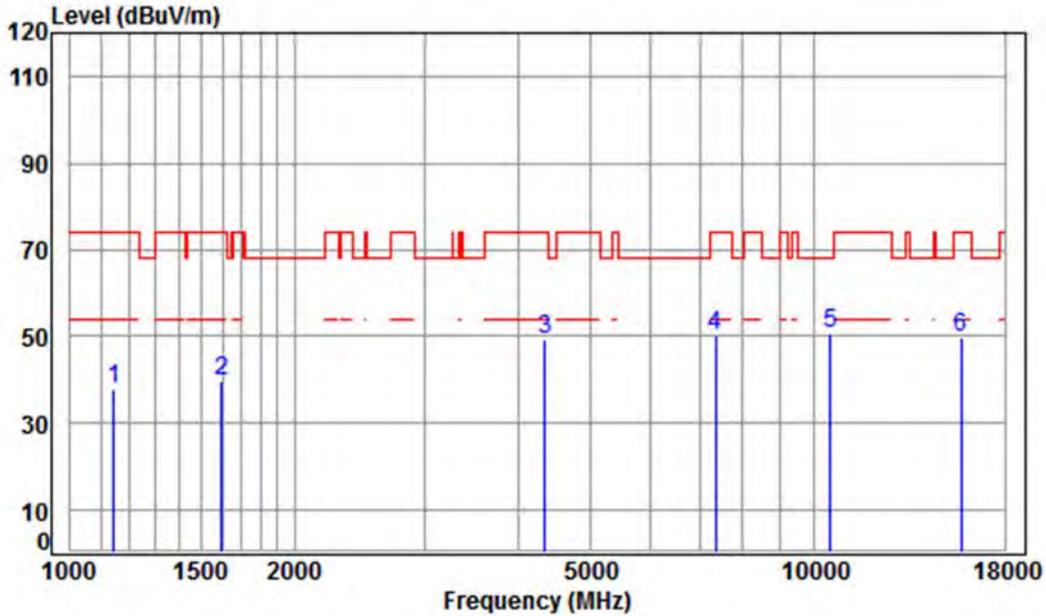

Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5240 TX RSE
 : Ant 2 5G WIFI 11N CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	48.38	38.08	74.00	-35.92 peak
2	1597.181	5.35	26.24	38.70	46.84	39.73	74.00	-34.27 peak
3	4341.886	7.38	33.60	38.14	46.38	49.22	74.00	-24.78 peak
4	7368.741	10.03	36.35	38.24	41.92	50.06	74.00	-23.94 peak
5	pp10480.000	11.28	37.12	36.35	38.81	50.86	68.20	-17.34 peak
6	15720.000	14.57	41.31	37.99	31.71	49.60	74.00	-24.40 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 169 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

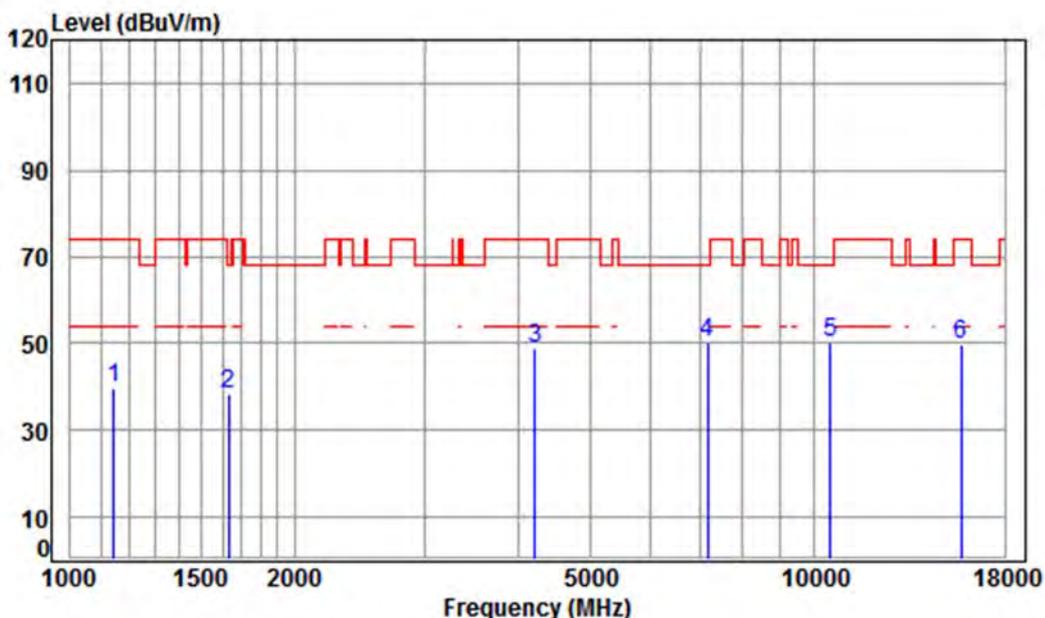


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5240 TX RSE
 : Ant 2 5G WIFI 11N CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.11	39.81	74.00	-34.19 peak
2	1629.825	5.31	26.38	38.70	45.43	38.42	68.20	-29.78 peak
3	4206.011	7.23	33.60	38.12	45.96	48.67	74.00	-25.33 peak
4	7179.527	10.08	36.43	38.22	41.88	50.17	68.20	-18.03 peak
5	pp10480.000	11.28	37.12	36.35	38.30	50.35	68.20	-17.85 peak
6	15720.000	14.57	41.31	37.99	31.96	49.85	74.00	-24.15 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	---------------	-----------------	------	------	----------

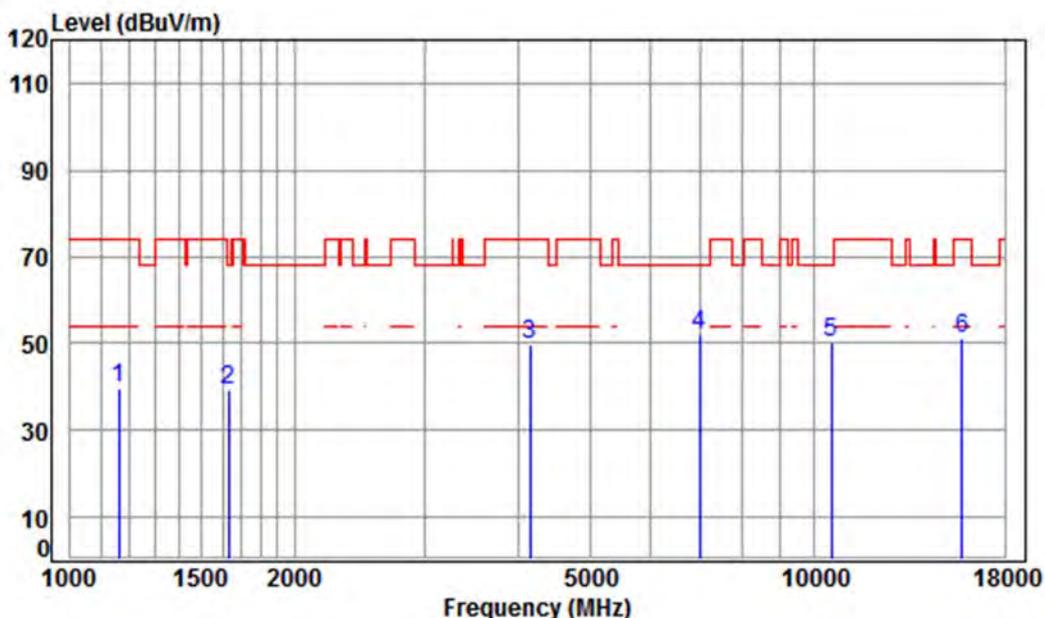

Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5260 TX RSE
 : Ant 2 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1162.182	4.27	24.29	38.70	49.73	39.59	74.00	-34.41	peak
2	1634.543	5.31	26.40	38.70	46.43	39.44	68.20	-28.76	peak
3	4145.664	7.16	33.60	38.12	46.93	49.57	74.00	-24.43	peak
4	7015.420	10.13	36.49	38.20	43.58	52.00	68.20	-16.20	peak
5	10520.000	11.30	37.12	36.35	38.29	50.36	68.20	-17.84	peak
6	15780.000	14.66	41.29	37.95	33.06	51.06	74.00	-22.94	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180100021702

Page: 171 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

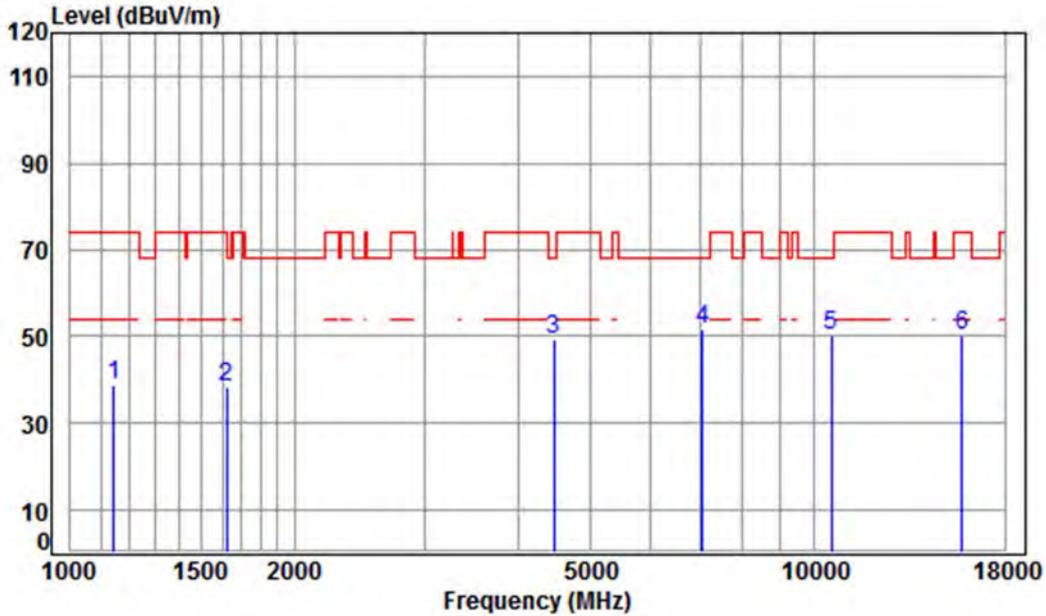


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5260 TX RSE
 : Ant 2 5G WIFI 11N CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.07	38.77	74.00	-35.23 peak
2	1620.431	5.32	26.34	38.70	45.53	38.49	74.00	-35.51 peak
3	4469.214	7.53	33.60	38.15	46.48	49.46	68.20	-18.74 peak
4 pp	7076.516	10.11	36.47	38.21	43.17	51.54	68.20	-16.66 peak
5	10520.000	11.30	37.12	36.35	38.17	50.24	68.20	-17.96 peak
6	15780.000	14.66	41.29	37.95	32.34	50.34	74.00	-23.66 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5300	Peak	Vertical
------------	---------------	-----------------	------	------	----------

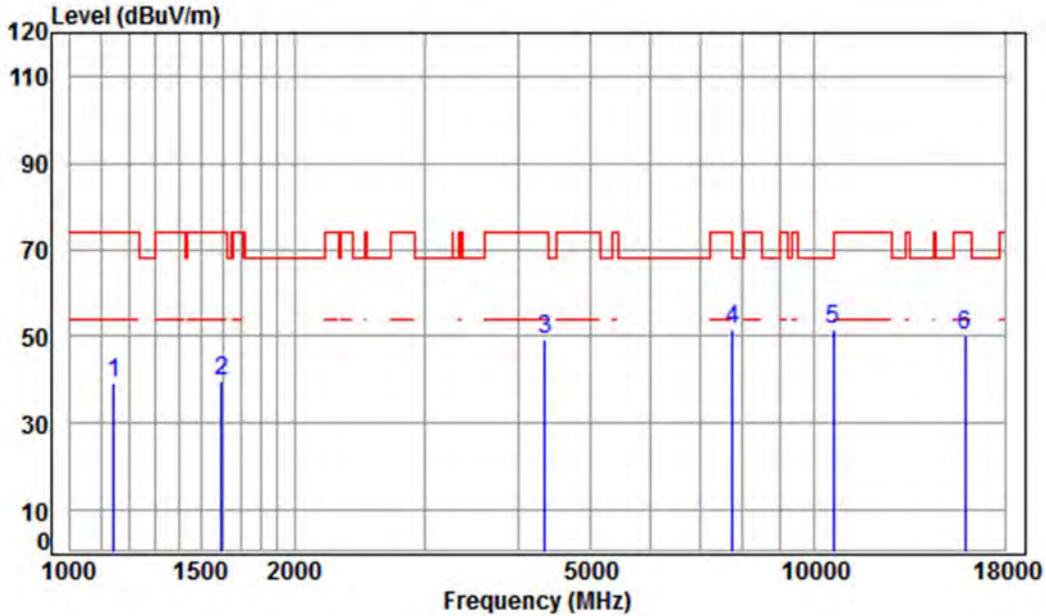


Condition: 3m VERTICAL
Job No : 0217RG
Mode : 5300 TX RSE
: Ant 2 5G WIFI 11N CH60

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.68	39.38	74.00	-34.62 peak
2	1597.181	5.35	26.24	38.70	46.88	39.77	74.00	-34.23 peak
3	4341.886	7.38	33.60	38.14	46.61	49.45	74.00	-24.55 peak
4	7762.260	9.97	36.46	38.28	43.33	51.48	68.20	-16.72 peak
5	pp10600.000	11.36	37.22	36.36	39.47	51.69	68.20	-16.51 peak
6	15900.000	14.84	41.24	37.87	31.80	50.01	74.00	-23.99 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5300	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

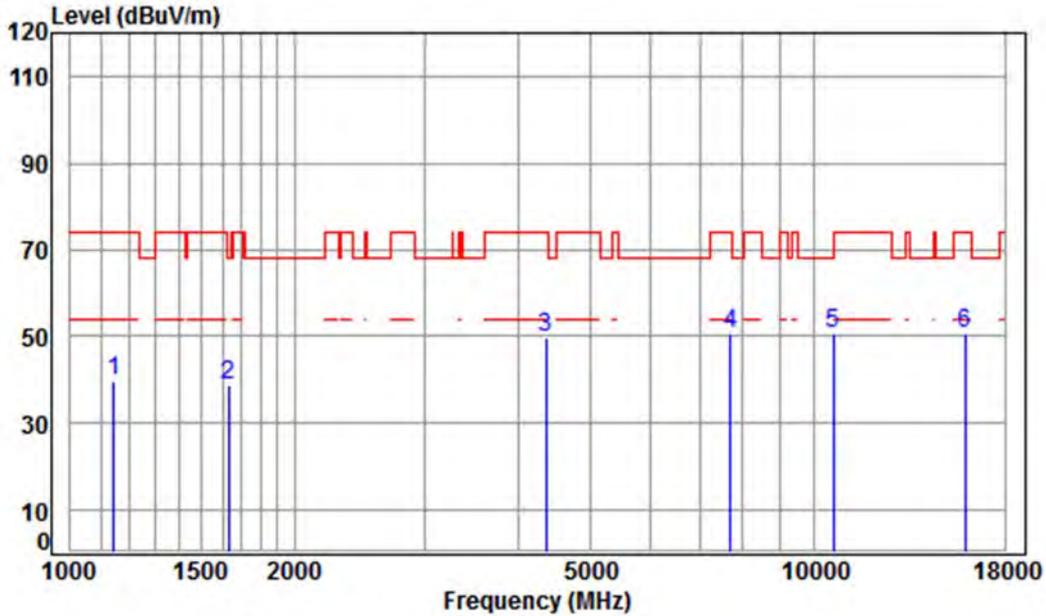

Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5300 TX RSE
 : Ant 2 5G WIFI 11N CH60

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	50.03	39.73	74.00	-34.27 peak
2	1634.543	5.31	26.40	38.70	45.61	38.62	68.20	-29.58 peak
3	4354.454	7.40	33.60	38.14	46.74	49.60	74.00	-24.40 peak
4	7717.518	9.98	36.43	38.27	42.48	50.62	74.00	-23.38 peak
5	pp10600.000	11.36	37.22	36.36	38.57	50.79	68.20	-17.41 peak
6	15900.000	14.84	41.24	37.87	32.25	50.46	74.00	-23.54 peak