




Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	---------------	-----------------	------	------	----------

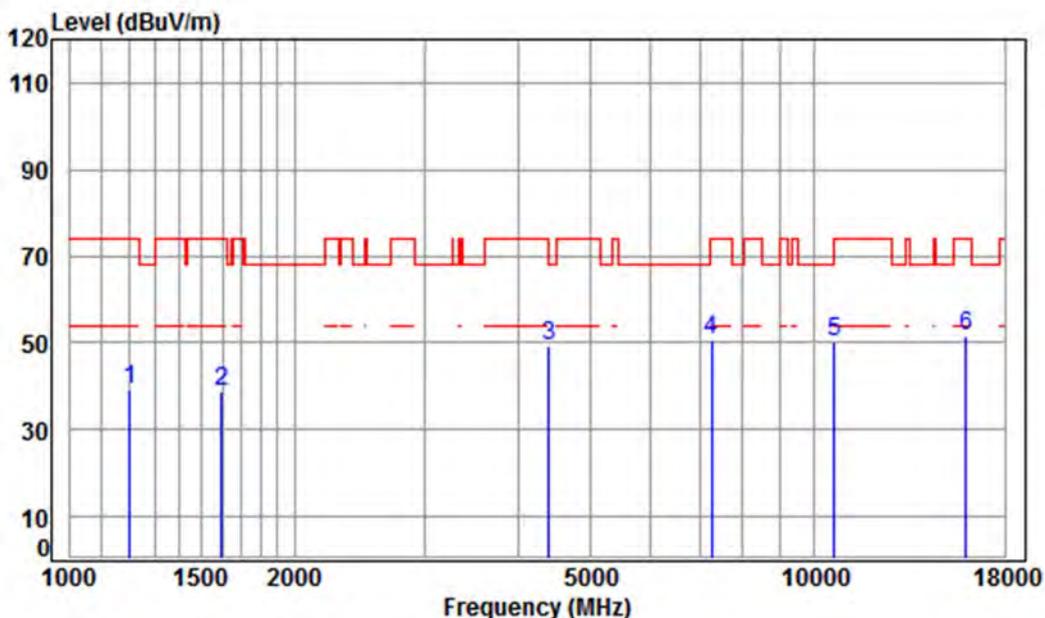


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5320 TX RSE
 : Ant 2 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	49.03	39.25	74.00	-34.75	peak
2	1597.181	5.35	26.24	38.70	46.01	38.90	74.00	-35.10	peak
3	4392.376	7.44	33.60	38.14	46.26	49.16	74.00	-24.84	peak
4	7263.015	10.06	36.39	38.23	42.21	50.43	74.00	-23.57	peak
5	10640.000	11.39	37.27	36.37	37.77	50.06	74.00	-23.94	peak
6	pp15960.000	14.93	41.22	37.83	33.08	51.40	74.00	-22.60	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

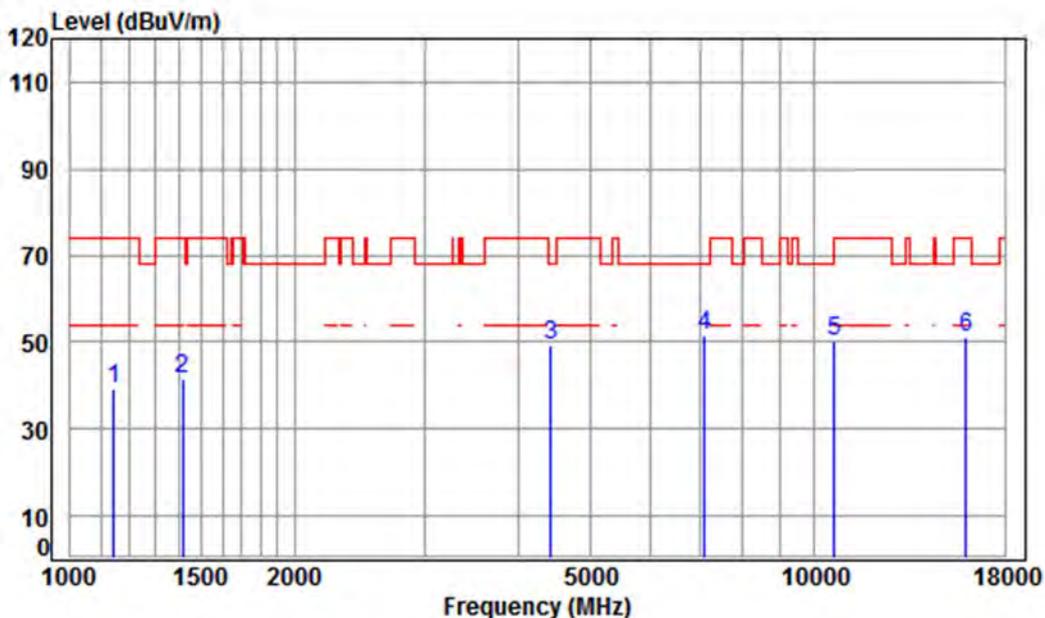


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5320 TX RSE
 : Ant 2 5G WIFI 11N CH64

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.37	39.07	74.00	-34.93	peak
2	1414.597	5.20	25.45	38.70	49.50	41.45	74.00	-32.55	peak
3	4417.841	7.47	33.60	38.14	46.22	49.15	68.20	-19.05	peak
4 pp	7117.542	10.10	36.45	38.21	43.05	51.39	68.20	-16.81	peak
5	10640.000	11.39	37.27	36.37	37.89	50.18	74.00	-23.82	peak
6	15960.000	14.93	41.22	37.83	32.95	51.27	74.00	-22.73	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	---------------	-----------------	------	------	----------

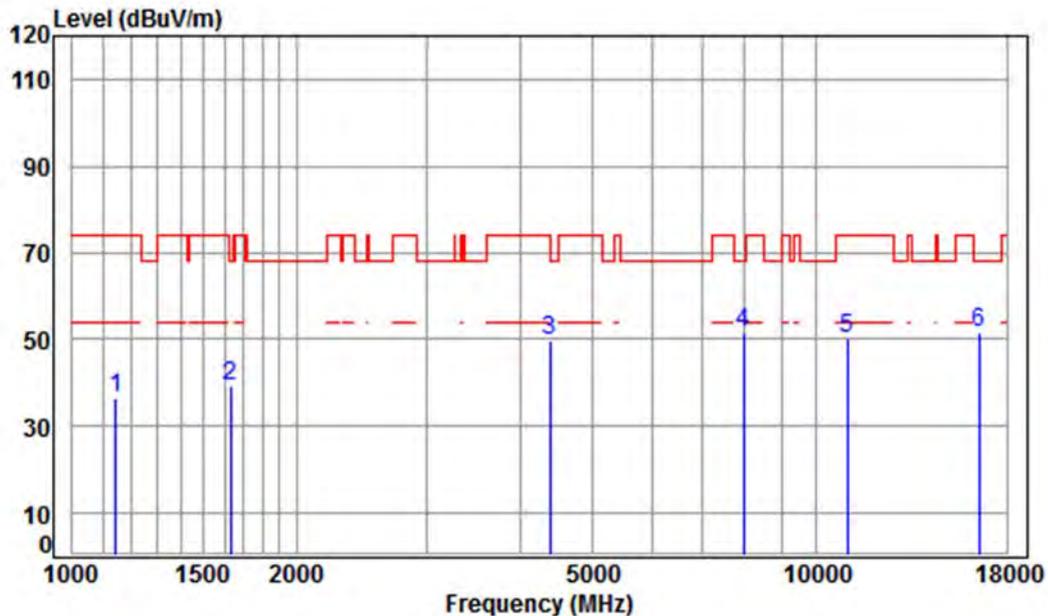


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5500 TX RSE
 : Ant 2 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	46.86	36.56	74.00	-37.44	peak
2	1629.825	5.31	26.38	38.70	46.32	39.31	68.20	-28.89	peak
3	4379.699	7.43	33.60	38.14	46.93	49.82	74.00	-24.18	peak
4	7966.832	9.95	36.58	38.30	43.25	51.48	68.20	-16.72	peak
5	11000.000	11.63	37.70	36.40	37.35	50.28	74.00	-23.72	peak
6	pp16500.000	14.50	42.70	38.00	32.29	51.49	68.20	-16.71	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

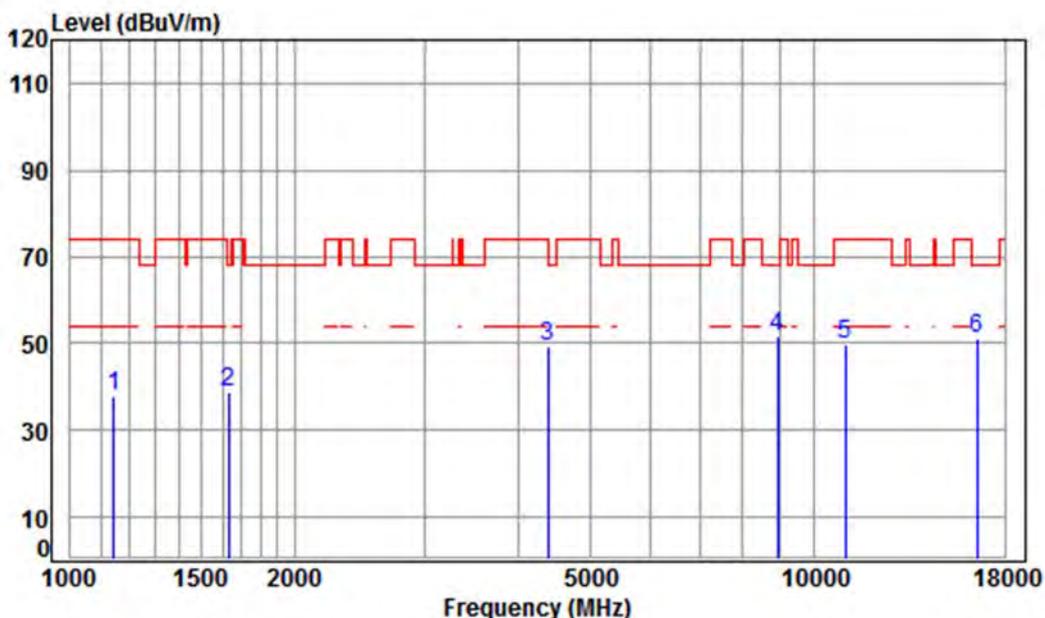

Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5500 TX RSE
 : Ant 2 5G WIFI 11N CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.28	37.98	74.00	-36.02	peak
2	1634.543	5.31	26.40	38.70	45.65	38.66	68.20	-29.54	peak
3	4379.699	7.43	33.60	38.14	46.19	49.08	74.00	-24.92	peak
4	pp 8917.462	10.38	36.50	38.21	42.90	51.57	68.20	-16.63	peak
5	11000.000	11.63	37.70	36.40	36.87	49.80	74.00	-24.20	peak
6	16500.000	14.50	42.70	38.00	31.99	51.19	68.20	-17.01	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 178 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5580	Peak	Vertical
------------	---------------	-----------------	------	------	----------

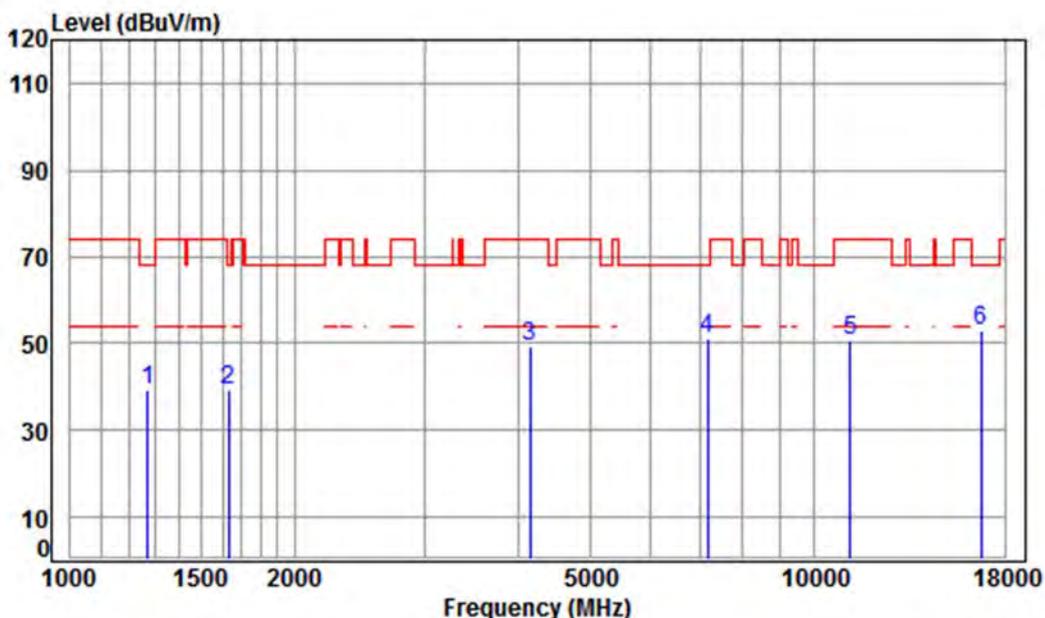

Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5580 TX RSE
 : Ant 2 5G WIFI 11N CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1271.123	4.69	24.82	38.70	48.30	39.11	68.20	-29.09 peak
2	1634.543	5.31	26.40	38.70	46.02	39.03	68.20	-29.17 peak
3	4145.664	7.16	33.60	38.12	46.49	49.13	74.00	-24.87 peak
4	7179.527	10.08	36.43	38.22	42.61	50.90	68.20	-17.30 peak
5	11160.000	11.80	37.83	36.45	37.64	50.82	74.00	-23.18 peak
6	pp16740.000	15.57	42.75	38.10	32.74	52.96	68.20	-15.24 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 179 of 817

Test mode:	802.11n(HT20)	Frequency(MHz):	5580	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

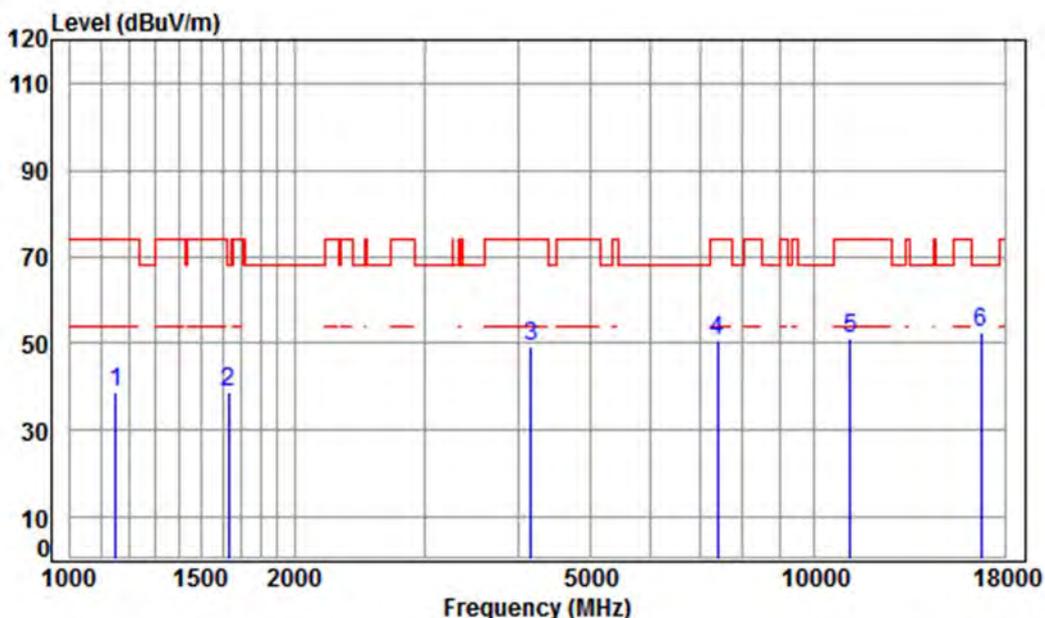


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5580 TX RSE
 : Ant 2 5G WIFI 11N CH116

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1152.148	4.22	24.24	38.70	49.02	38.78	74.00	-35.22 peak
2	1629.825	5.31	26.38	38.70	45.84	38.83	68.20	-29.37 peak
3	4157.664	7.17	33.60	38.12	46.64	49.29	74.00	-24.71 peak
4	7411.461	10.02	36.33	38.24	42.73	50.84	74.00	-23.16 peak
5	11160.000	11.80	37.83	36.45	37.75	50.93	74.00	-23.07 peak
6	pp16740.000	15.57	42.75	38.10	32.27	52.49	68.20	-15.71 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	---------------	-----------------	------	------	----------

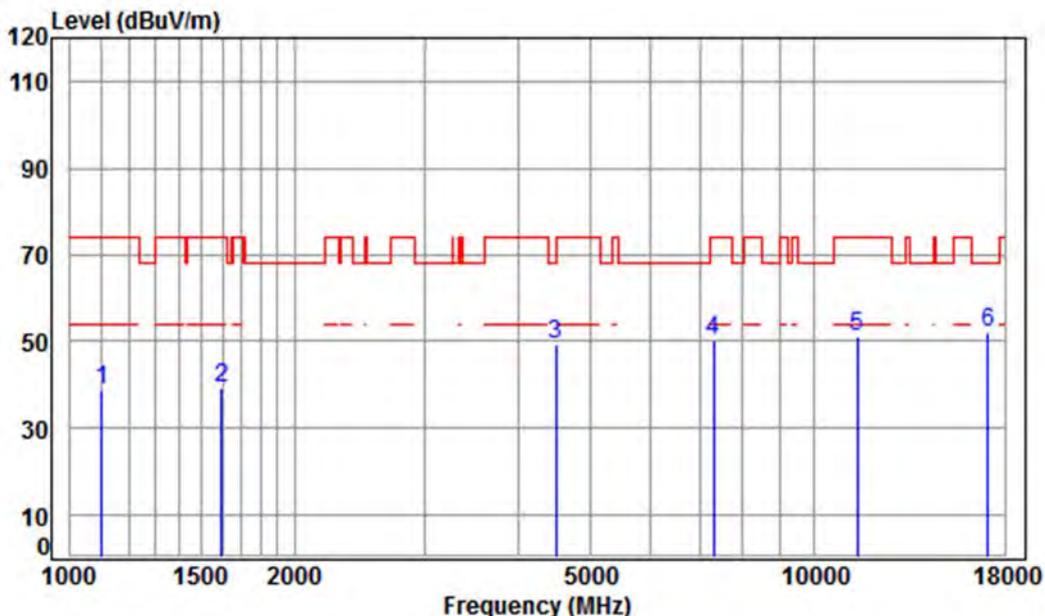


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5700 TX RSE
 : Ant 2 5G WIFI 11N CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1103.264	4.02	23.98	38.70	49.67	38.97	74.00	-35.03 peak
2	1597.181	5.35	26.24	38.70	46.52	39.41	74.00	-34.59 peak
3	4495.125	7.55	33.60	38.15	46.06	49.06	68.20	-19.14 peak
4	7305.122	10.05	36.38	38.23	42.11	50.31	74.00	-23.69 peak
5	11400.000	12.04	38.02	36.52	37.45	50.99	74.00	-23.01 peak
6	pp17100.000	16.49	42.92	38.17	30.71	51.95	68.20	-16.25 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

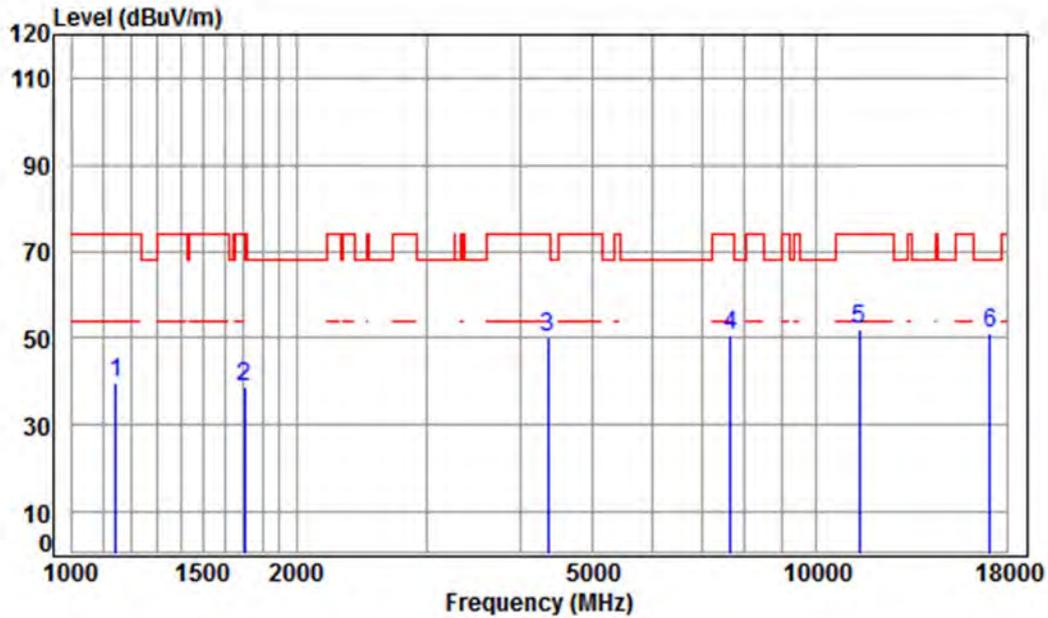


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5700 TX RSE
 : Ant 2 5G WIFI 11N CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.02	39.72	74.00	-34.28	peak
2	1702.042	5.23	26.68	38.70	45.49	38.70	74.00	-35.30	peak
3	4354.454	7.40	33.60	38.14	47.26	50.12	74.00	-23.88	peak
4	7650.888	9.98	36.39	38.27	42.62	50.72	74.00	-23.28	peak
5	11400.000	12.04	38.02	36.52	38.57	52.11	74.00	-21.89	peak
6	pp17100.000	16.49	42.92	38.17	29.95	51.19	68.20	-17.01	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	---------------	-----------------	------	------	----------

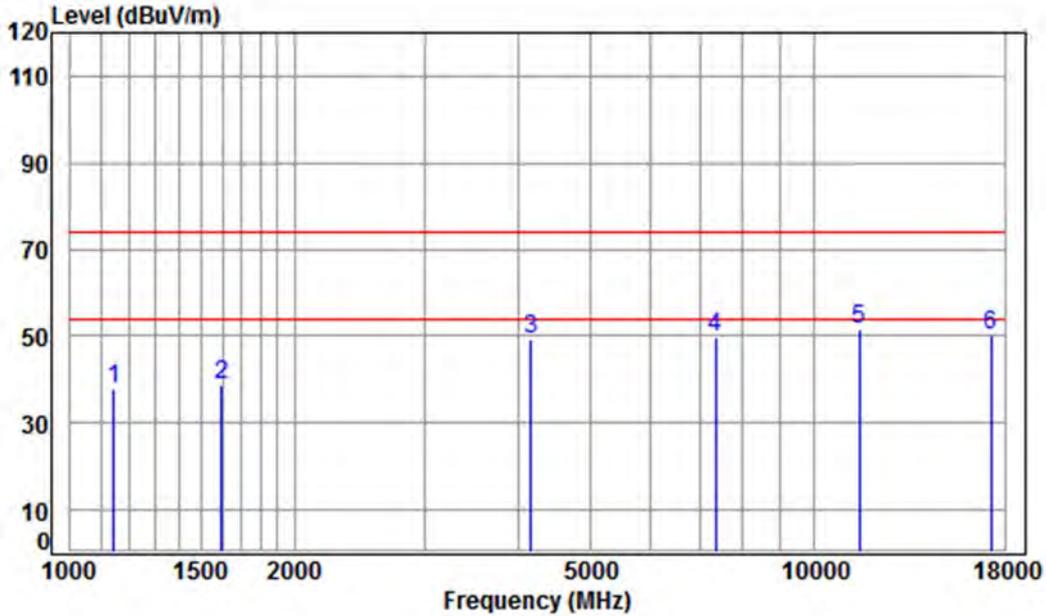

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5745 TX RSE

: Ant 2 5G WIFI 11N CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.01	37.71	74.00	-36.29	peak
2	1597.181	5.35	26.24	38.70	45.97	38.86	74.00	-35.14	peak
3	4157.664	7.17	33.60	38.12	46.74	49.39	74.00	-24.61	peak
4	7368.741	10.03	36.35	38.24	41.68	49.82	74.00	-24.18	peak
5	pp11490.000	12.13	38.09	36.55	37.69	51.36	74.00	-22.64	peak
6	17235.000	16.18	43.08	38.13	28.85	49.98	74.00	-24.02	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

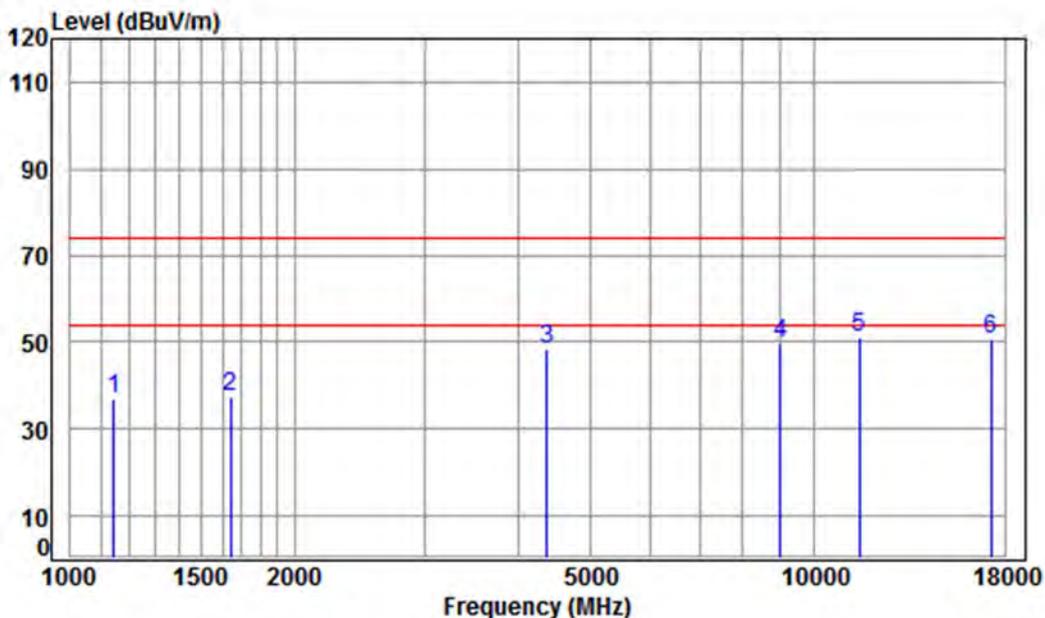

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5745 TX RSE

: Ant 2 5G WIFI 11N CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	47.36	37.06	74.00	-36.94 peak
2	1644.019	5.30	26.44	38.70	44.28	37.32	74.00	-36.68 peak
3	4367.058	7.41	33.60	38.14	45.58	48.45	74.00	-25.55 peak
4	8995.123	10.40	36.59	38.20	41.13	49.92	74.00	-24.08 peak
5	pp11490.000	12.13	38.09	36.55	37.42	51.09	74.00	-22.91 peak
6	17235.000	16.18	43.08	38.13	29.45	50.58	74.00	-23.42 peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5785	Peak	Vertical
------------	---------------	-----------------	------	------	----------

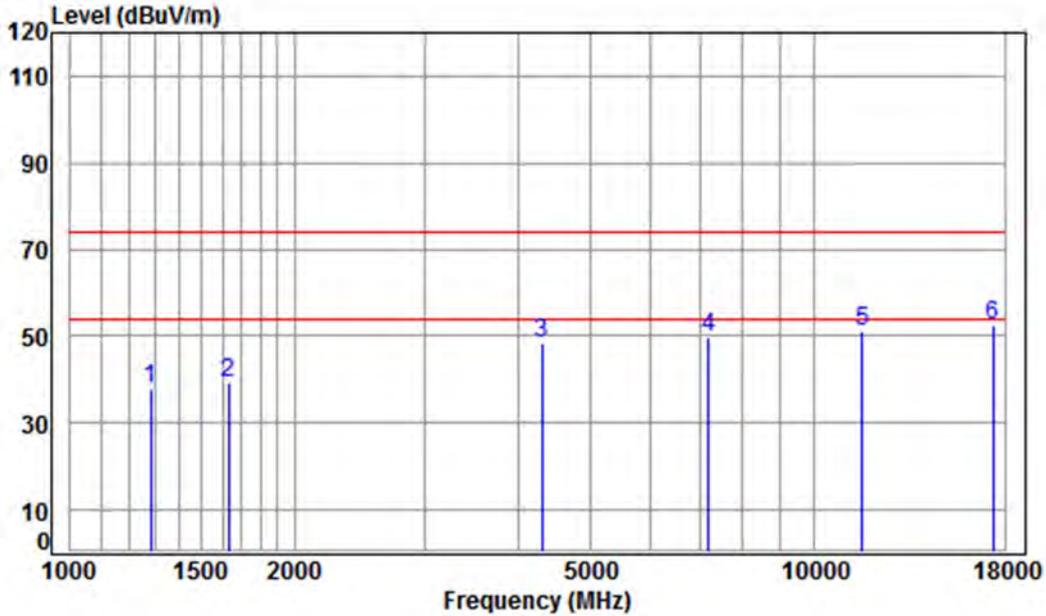

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5785 TX RSE

: Ant 2 5G WIFI 11N CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1282.193	4.73	24.87	38.70	46.90	37.80	74.00	-36.20	peak
2	1634.543	5.31	26.40	38.70	46.06	39.07	74.00	-34.93	peak
3	4304.400	7.34	33.60	38.13	45.39	48.20	74.00	-25.80	peak
4	7200.309	10.08	36.42	38.22	41.67	49.95	74.00	-24.05	peak
5	11570.000	12.17	38.17	36.57	37.51	51.28	74.00	-22.72	peak
6	pp17355.000	15.92	43.23	38.09	31.33	52.39	74.00	-21.61	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

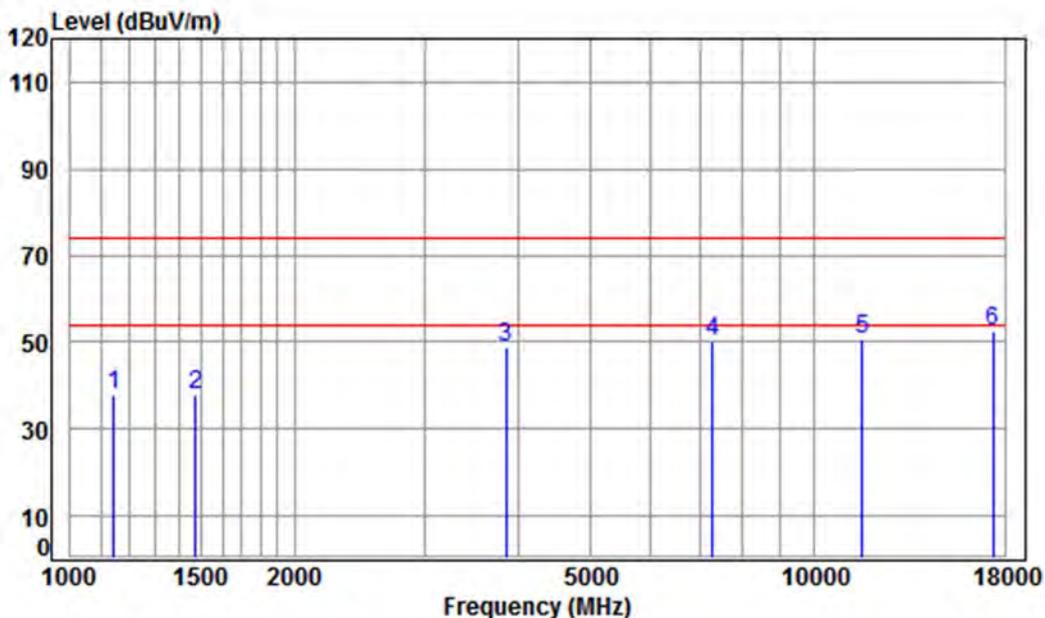

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5785 TX RSE

: Ant 2 5G WIFI 11N CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.35	38.05	74.00	-35.95	peak
2	1473.013	5.39	25.69	38.70	45.46	37.84	74.00	-36.16	peak
3	3845.537	6.83	33.19	38.06	46.89	48.85	74.00	-25.15	peak
4	7284.038	10.06	36.38	38.23	41.90	50.11	74.00	-23.89	peak
5	11570.000	12.17	38.17	36.57	36.79	50.56	74.00	-23.44	peak
6	pp17355.000	15.92	43.23	38.09	31.33	52.39	74.00	-21.61	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	---------------	-----------------	------	------	----------

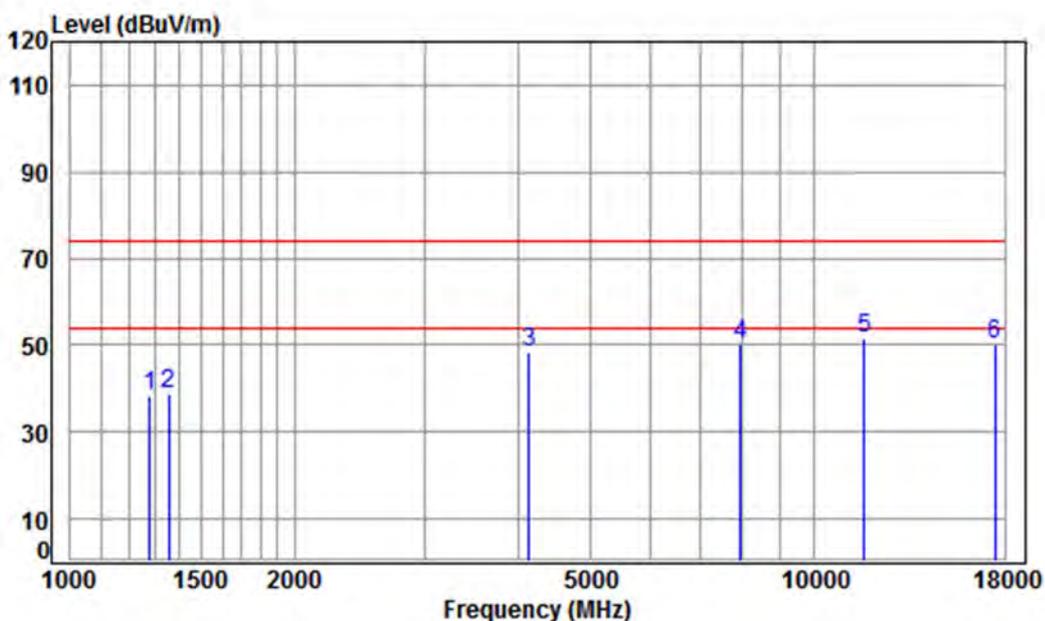

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5825 TX RSE

: Ant 2 5G WIFI 11N CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1278.492	4.72	24.85	38.70	47.67	38.54	74.00	-35.46	peak
2	1354.577	4.99	25.20	38.70	47.30	38.79	74.00	-35.21	peak
3	4133.699	7.14	33.60	38.11	45.81	48.44	74.00	-25.56	peak
4	7943.838	9.96	36.57	38.29	42.12	50.36	74.00	-23.64	peak
5	pp11650.000	12.20	38.25	36.60	37.67	51.52	74.00	-22.48	peak
6	17475.000	15.65	43.37	38.06	29.32	50.28	74.00	-23.72	peak



Test mode:	802.11n(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

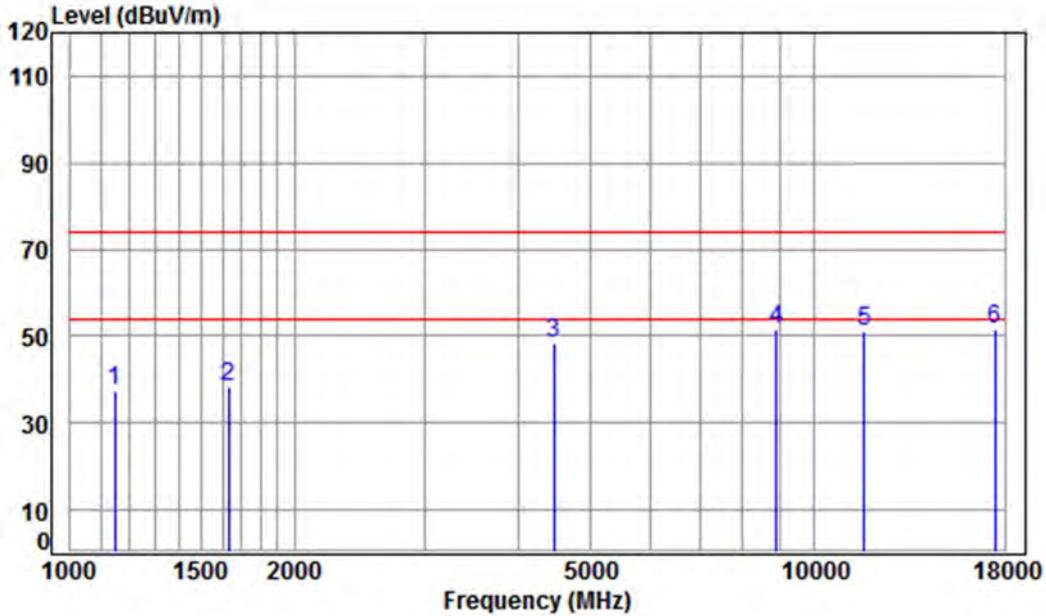

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5825 TX RSE

: Ant 2 5G WIFI 11N CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1148.823	4.21	24.22	38.70	47.74	37.47	74.00	-36.53	peak
2	1634.543	5.31	26.40	38.70	45.18	38.19	74.00	-35.81	peak
3	4469.214	7.53	33.60	38.15	45.38	48.36	74.00	-25.64	peak
4	8891.725	10.37	36.47	38.21	42.73	51.36	74.00	-22.64	peak
5	11650.000	12.20	38.25	36.60	37.30	51.15	74.00	-22.85	peak
6	pp17475.000	15.65	43.37	38.06	30.65	51.61	74.00	-22.39	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Vertical
------------	----------------	-----------------	------	------	----------

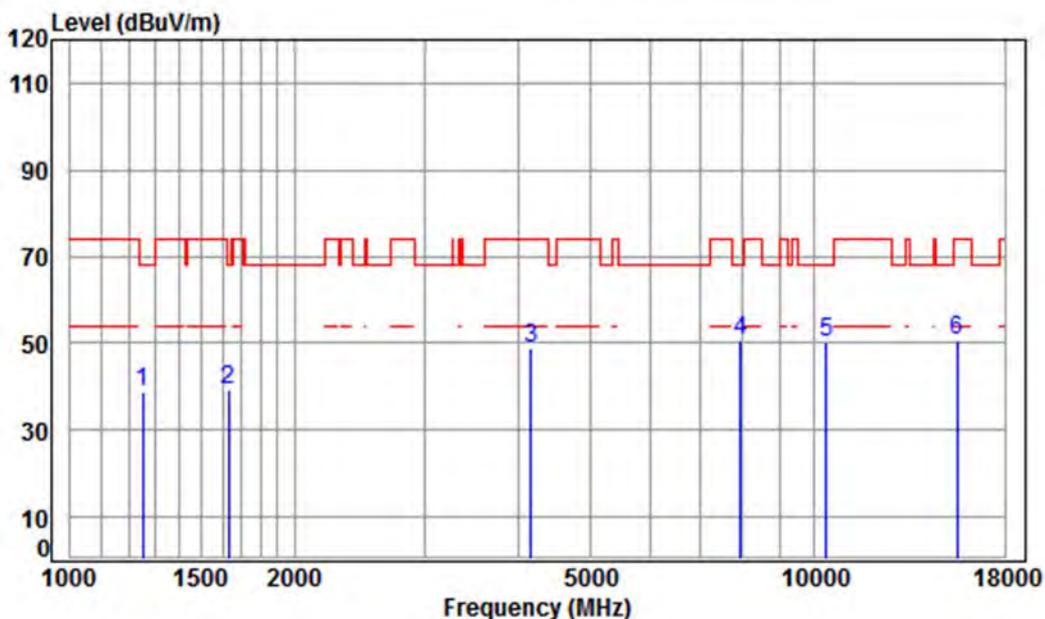

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5180 TX RSE

: Ant 2 5G WIFI 11AC CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1252.885	4.62	24.73	38.70	48.14	38.79	68.20	-29.41	peak
2	1629.825	5.31	26.38	38.70	46.28	39.27	68.20	-28.93	peak
3	4157.664	7.17	33.60	38.12	46.33	48.98	74.00	-25.02	peak
4 pp	7943.838	9.96	36.57	38.29	42.54	50.78	68.20	-17.42	peak
5	10360.000	11.19	37.24	36.34	38.30	50.39	68.20	-17.81	peak
6	15540.000	14.30	41.38	38.12	32.98	50.54	74.00	-23.46	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5180	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

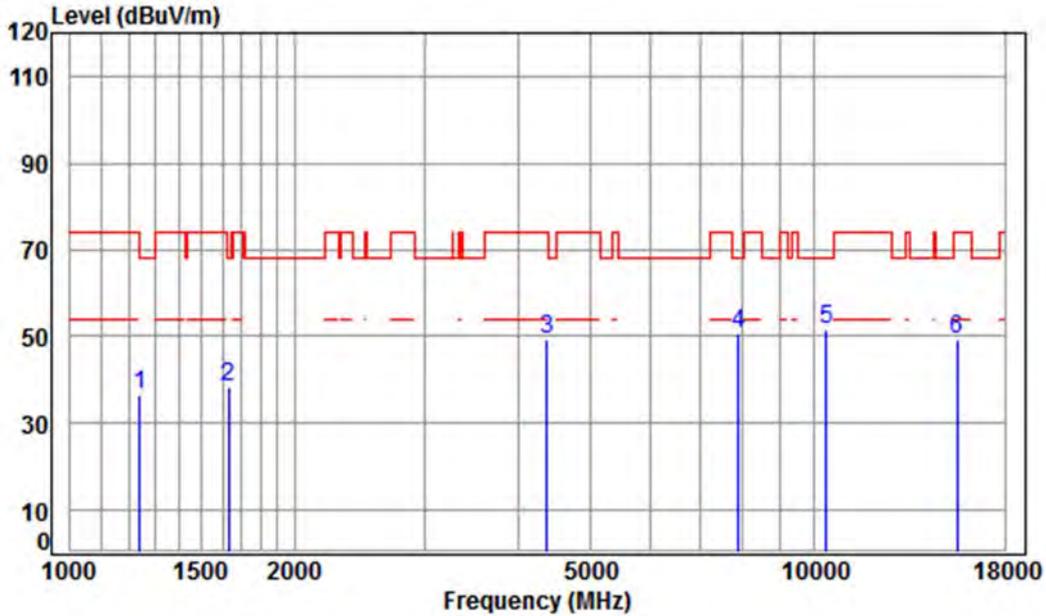


Condition: 3m HORIZONTAL
Job No : 0217RG
Mode : 5180 TX RSE
: Ant 2 5G WIFI 11AC CH36

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1238.483	4.57	24.67	38.70	46.06	36.60	74.00	-37.40 peak
2	1629.825	5.31	26.38	38.70	45.39	38.38	68.20	-29.82 peak
3	4367.058	7.41	33.60	38.14	46.24	49.11	74.00	-24.89 peak
4	7898.049	9.96	36.54	38.29	42.23	50.44	68.20	-17.76 peak
5	pp10360.000	11.19	37.24	36.34	39.47	51.56	68.20	-16.64 peak
6	15540.000	14.30	41.38	38.12	31.65	49.21	74.00	-24.79 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5220	Peak	Vertical
------------	----------------	-----------------	------	------	----------

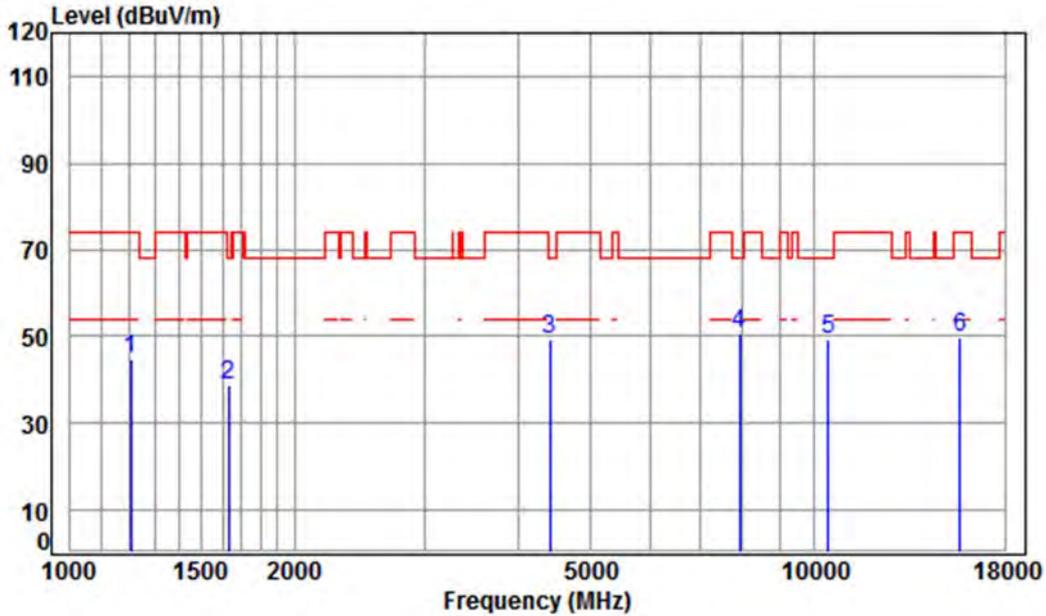


Condition: 3m VERTICAL
Job No : 0217RG
Mode : 5220 TX RSE
: Ant 2 5G WIFI 11AC CH44

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	38.70	54.44	44.69	74.00	-29.31	peak
2	1629.825	5.31	26.38	38.70	45.70	38.69	68.20	-29.51	peak
3	4405.090	7.46	33.60	38.14	46.55	49.47	68.20	-18.73	peak
4	7920.911	9.96	36.55	38.29	42.28	50.50	68.20	-17.70	peak
5	10440.000	11.25	37.16	36.35	37.17	49.23	68.20	-18.97	peak
6	15660.000	14.48	41.34	38.03	31.84	49.63	74.00	-24.37	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5220	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

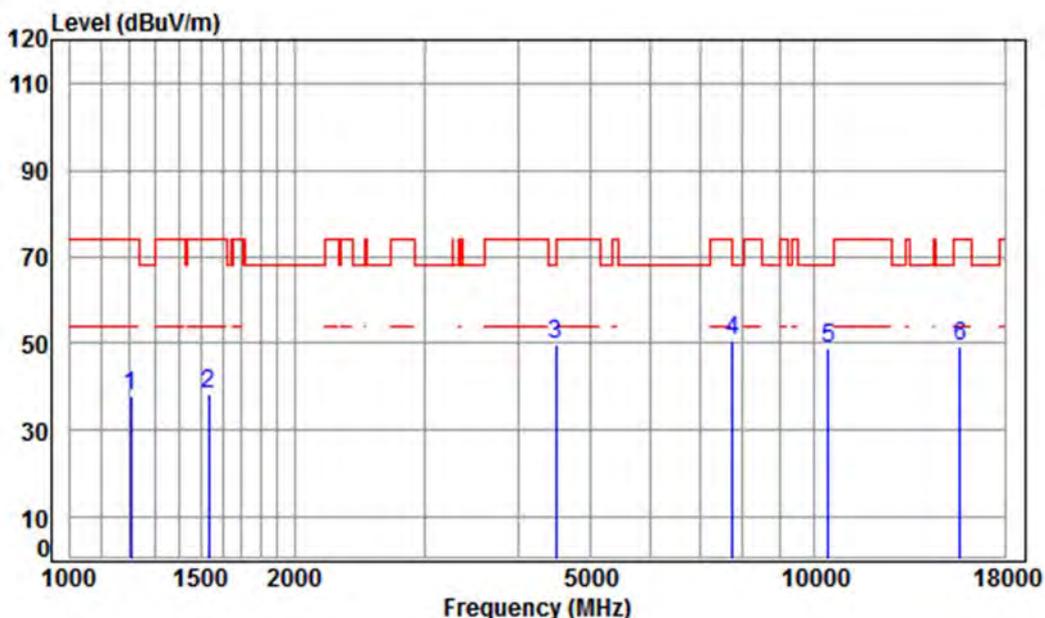


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5220 TX RSE
 : Ant 2 5G WIFI 11AC CH44

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	38.70	47.75	38.00	74.00	-36.00	peak
2	1533.841	5.44	25.96	38.70	45.54	38.24	74.00	-35.76	peak
3	4495.125	7.55	33.60	38.15	46.62	49.62	68.20	-18.58	peak
4	pp 7762.260	9.97	36.46	38.28	42.30	50.45	68.20	-17.75	peak
5	10440.000	11.25	37.16	36.35	36.95	49.01	68.20	-19.19	peak
6	15660.000	14.48	41.34	38.03	31.47	49.26	74.00	-24.74	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Vertical
------------	----------------	-----------------	------	------	----------

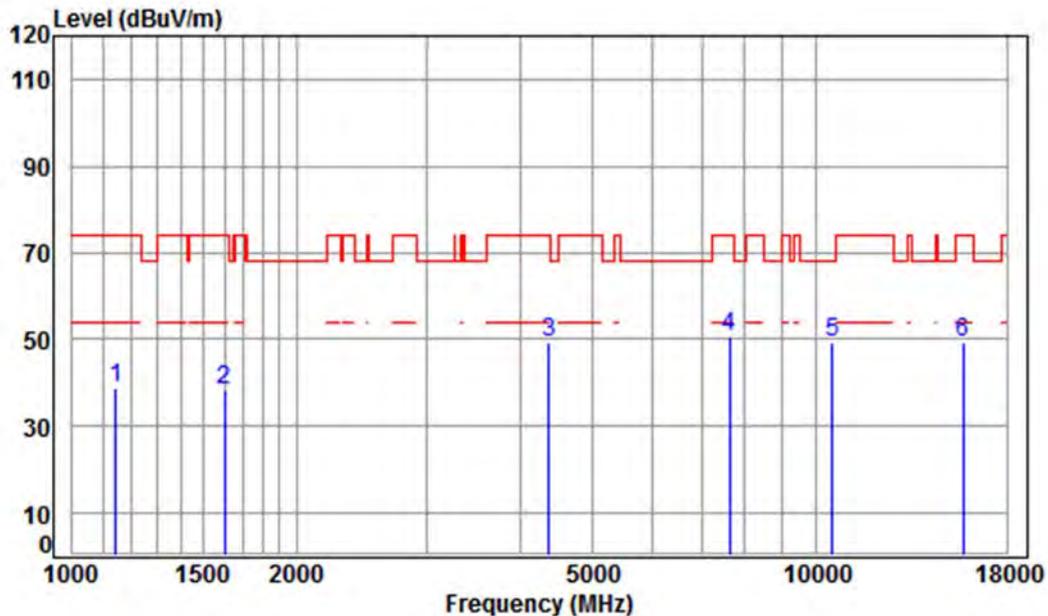


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5240 TX RSE
 : Ant 2 5G WIFI 11AC CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.05	38.75	74.00	-35.25 peak
2	1601.804	5.35	26.26	38.70	45.64	38.55	74.00	-35.45 peak
3	4367.058	7.41	33.60	38.14	46.38	49.25	74.00	-24.75 peak
4	7628.806	9.99	36.38	38.26	42.31	50.42	74.00	-23.58 peak
5	pp10480.000	11.28	37.12	36.35	37.24	49.29	68.20	-18.91 peak
6	15720.000	14.57	41.31	37.99	31.52	49.41	74.00	-24.59 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5240	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

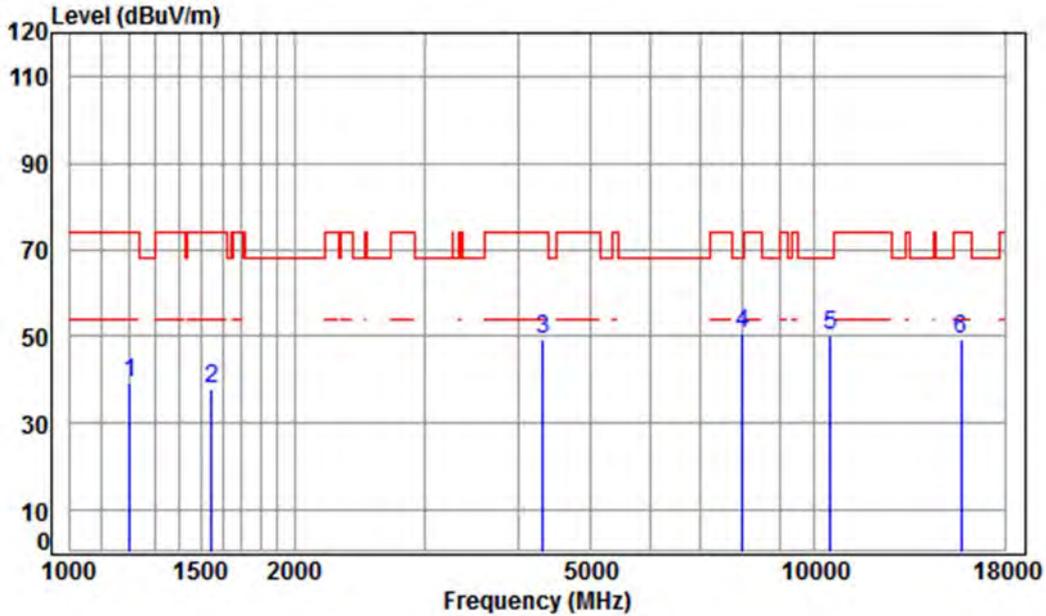


Condition: 3m HORIZONTAL
Job No : 0217RG
Mode : 5240 TX RSE
: Ant 2 5G WIFI 11AC CH48

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	48.98	39.20	74.00	-34.80	peak
2	1547.199	5.42	26.02	38.70	45.24	37.98	74.00	-36.02	peak
3	4316.859	7.36	33.60	38.13	46.40	49.23	74.00	-24.77	peak
4	pp 7989.893	9.95	36.59	38.30	42.62	50.86	68.20	-17.34	peak
5	10480.000	11.28	37.12	36.35	37.97	50.02	68.20	-18.18	peak
6	15720.000	14.57	41.31	37.99	31.37	49.26	74.00	-24.74	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Vertical
------------	----------------	-----------------	------	------	----------

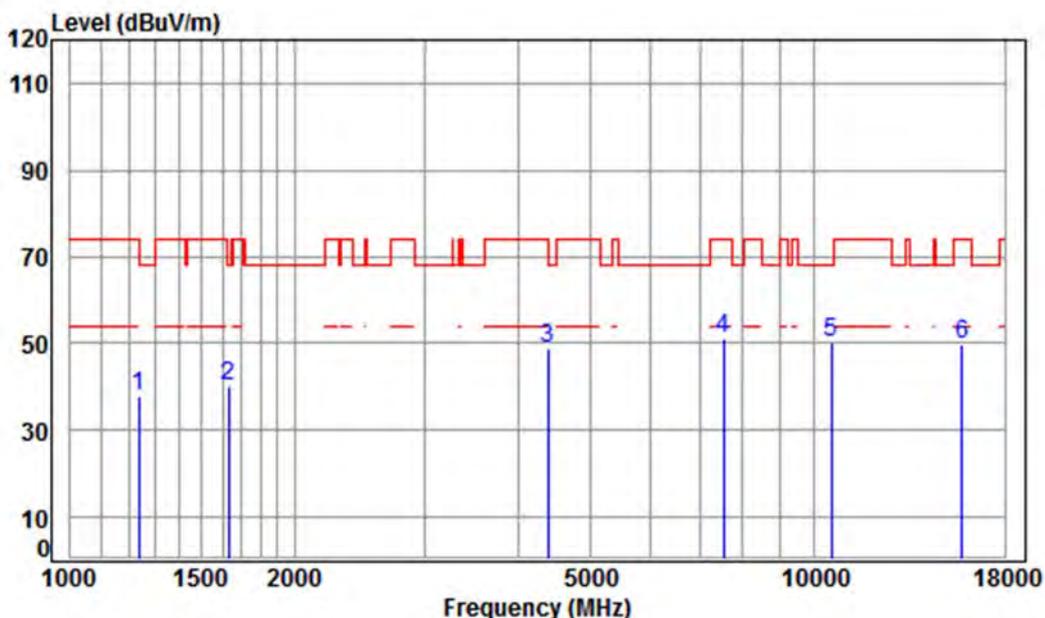


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5260 TX RSE
 : Ant 2 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1234.909	4.55	24.65	38.70	47.31	37.81	74.00	-36.19	peak
2	1629.825	5.31	26.38	38.70	46.98	39.97	68.20	-28.23	peak
3	4379.699	7.43	33.60	38.14	46.07	48.96	74.00	-25.04	peak
4	7541.114	10.00	36.33	38.26	43.13	51.20	74.00	-22.80	peak
5	pp10520.000	11.30	37.12	36.35	38.23	50.30	68.20	-17.90	peak
6	15780.000	14.66	41.29	37.95	31.88	49.88	74.00	-24.12	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5260	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

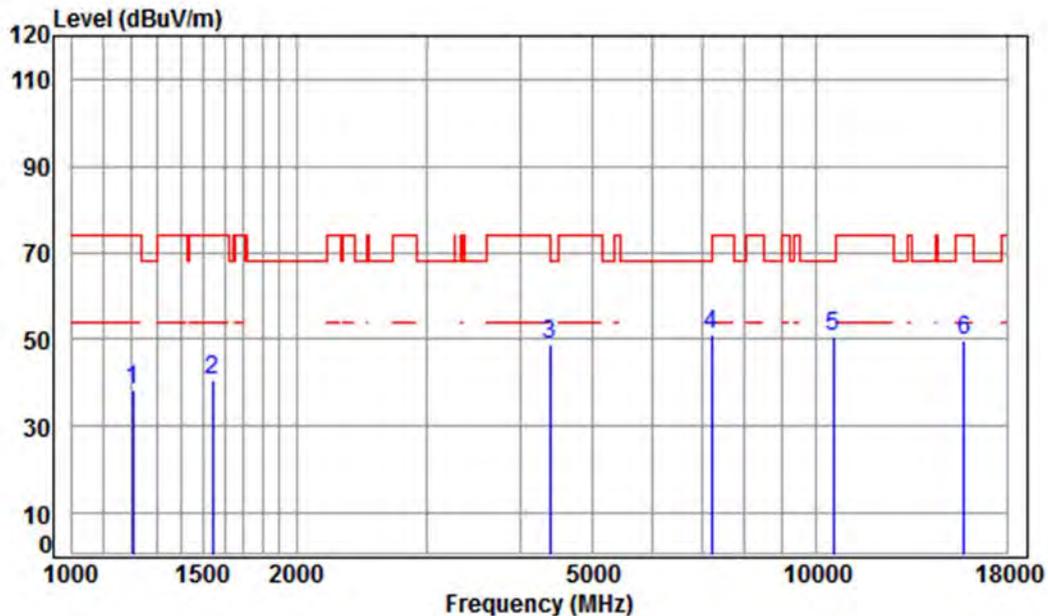

Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5260 TX RSE
 : Ant 2 5G WIFI 11AC CH52

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1206.682	4.44	24.51	38.70	48.11	38.36	74.00	-35.64 peak
2	1542.733	5.42	26.00	38.70	47.77	40.49	74.00	-33.51 peak
3	4379.699	7.43	33.60	38.14	45.89	48.78	74.00	-25.22 peak
4 pp	7221.150	10.07	36.41	38.22	42.88	51.14	68.20	-17.06 peak
5	10520.000	11.30	37.12	36.35	38.36	50.43	68.20	-17.77 peak
6	15780.000	14.66	41.29	37.95	31.89	49.89	74.00	-24.11 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 196 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5300	Peak	Vertical
------------	----------------	-----------------	------	------	----------

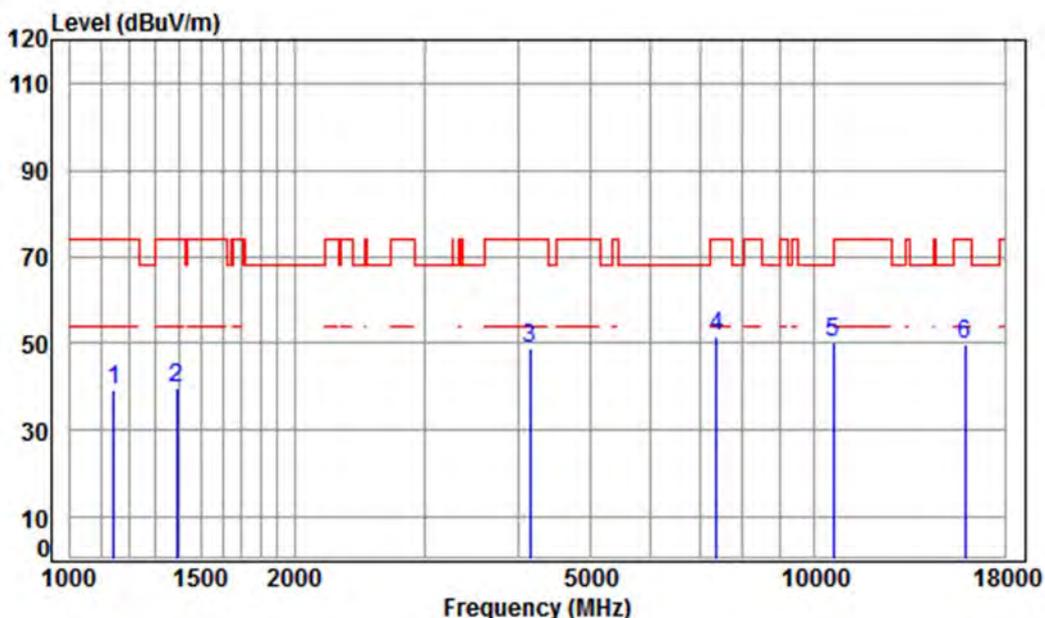

Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5300 TX RSE
 : Ant 2 5G WIFI 11AC CH60

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.72	39.42	74.00	-34.58	peak
2	1390.276	5.12	25.35	38.70	48.07	39.84	74.00	-34.16	peak
3	4145.664	7.16	33.60	38.12	46.18	48.82	74.00	-25.18	peak
4	7390.070	10.03	36.34	38.24	43.22	51.35	74.00	-22.65	peak
5	pp10600.000	11.36	37.22	36.36	38.17	50.39	68.20	-17.81	peak
6	15900.000	14.84	41.24	37.87	31.65	49.86	74.00	-24.14	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180100021702

Page: 197 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5300	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

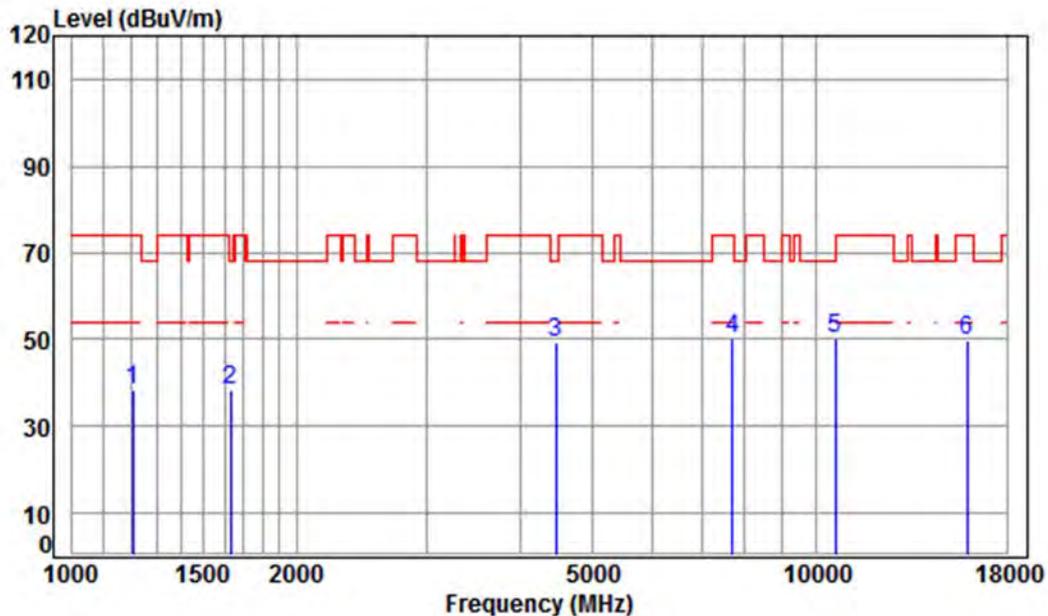


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5300 TX RSE
 : Ant 2 5G WIFI 11AC CH60

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	38.70	48.12	38.37	74.00	-35.63	peak
2	1629.825	5.31	26.38	38.70	45.42	38.41	68.20	-29.79	peak
3	4469.214	7.53	33.60	38.15	46.41	49.39	68.20	-18.81	peak
4	7717.518	9.98	36.43	38.27	41.91	50.05	74.00	-23.95	peak
5	pp10600.000	11.36	37.22	36.36	38.18	50.40	68.20	-17.80	peak
6	15900.000	14.84	41.24	37.87	31.32	49.53	74.00	-24.47	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Vertical
------------	----------------	-----------------	------	------	----------

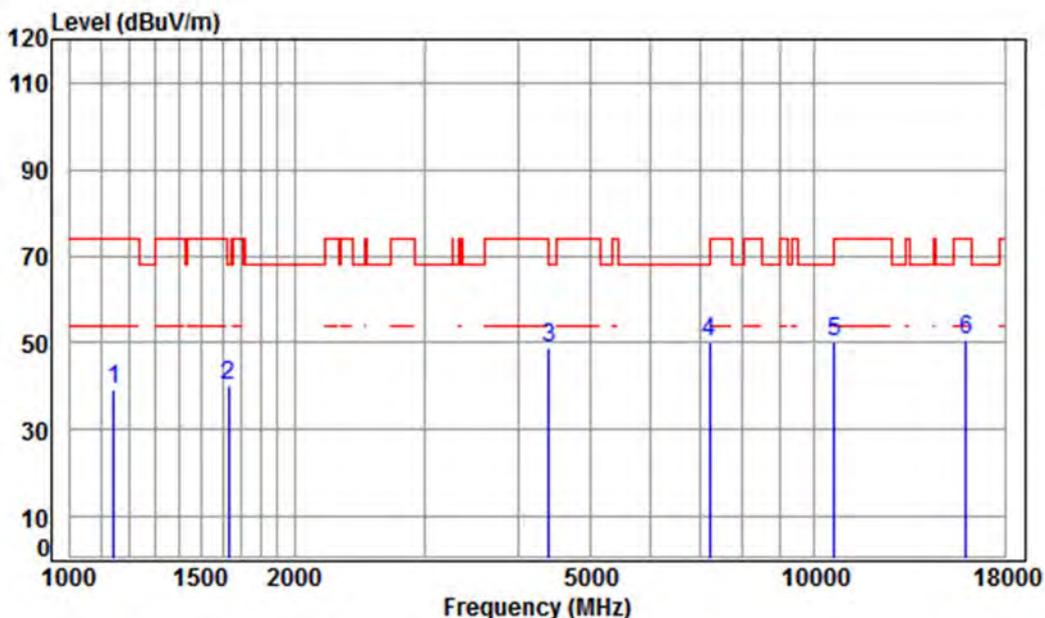


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5320 TX RSE
 : Ant 2 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	49.32	39.02	74.00	-34.98 peak
2	1629.825	5.31	26.38	38.70	47.13	40.12	68.20	-28.08 peak
3	4392.376	7.44	33.60	38.14	45.91	48.81	74.00	-25.19 peak
4 pp	7221.150	10.07	36.41	38.22	42.04	50.30	68.20	-17.90 peak
5	10640.000	11.39	37.27	36.37	37.95	50.24	74.00	-23.76 peak
6	15960.000	14.93	41.22	37.83	32.40	50.72	74.00	-23.28 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5320	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

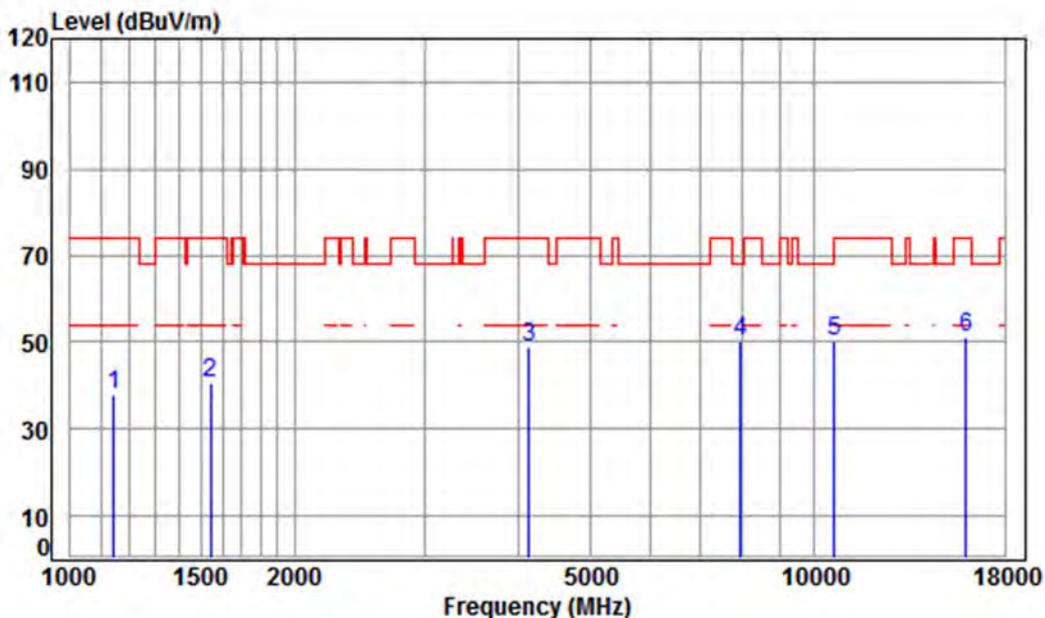

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5320 TX RSE

: Ant 2 5G WIFI 11AC CH64

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.17	37.87	74.00	-36.13	peak
2	1542.733	5.42	26.00	38.70	48.12	40.84	74.00	-33.16	peak
3	4133.699	7.14	33.60	38.11	46.03	48.66	74.00	-25.34	peak
4 pp	7943.838	9.96	36.57	38.29	42.01	50.25	68.20	-17.95	peak
5	10640.000	11.39	37.27	36.37	37.99	50.28	74.00	-23.72	peak
6	15960.000	14.93	41.22	37.83	32.94	51.26	74.00	-22.74	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 200 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Vertical
------------	----------------	-----------------	------	------	----------

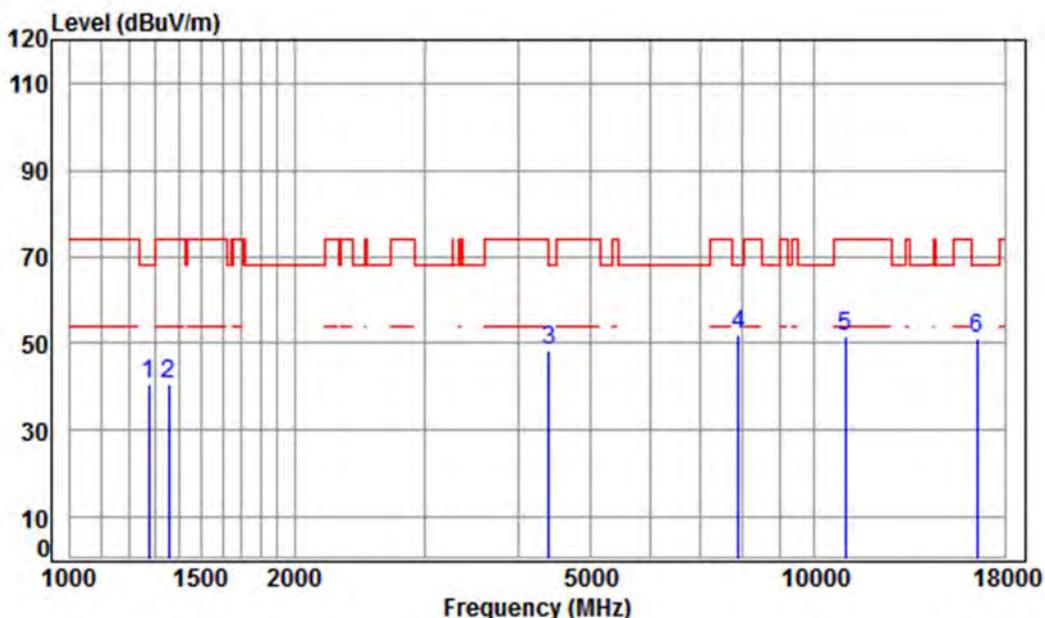

Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5500 TX RSE
 : Ant 2 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	4.71	24.84	38.70	49.91	40.76	68.20	-27.44	peak
2	1354.577	4.99	25.20	38.70	49.29	40.78	74.00	-33.22	peak
3	4392.376	7.44	33.60	38.14	45.65	48.55	74.00	-25.45	peak
4	pp 7898.049	9.96	36.54	38.29	43.59	51.80	68.20	-16.40	peak
5	11000.000	11.63	37.70	36.40	38.72	51.65	74.00	-22.35	peak
6	16500.000	14.50	42.70	38.00	32.02	51.22	68.20	-16.98	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 201 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5500	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

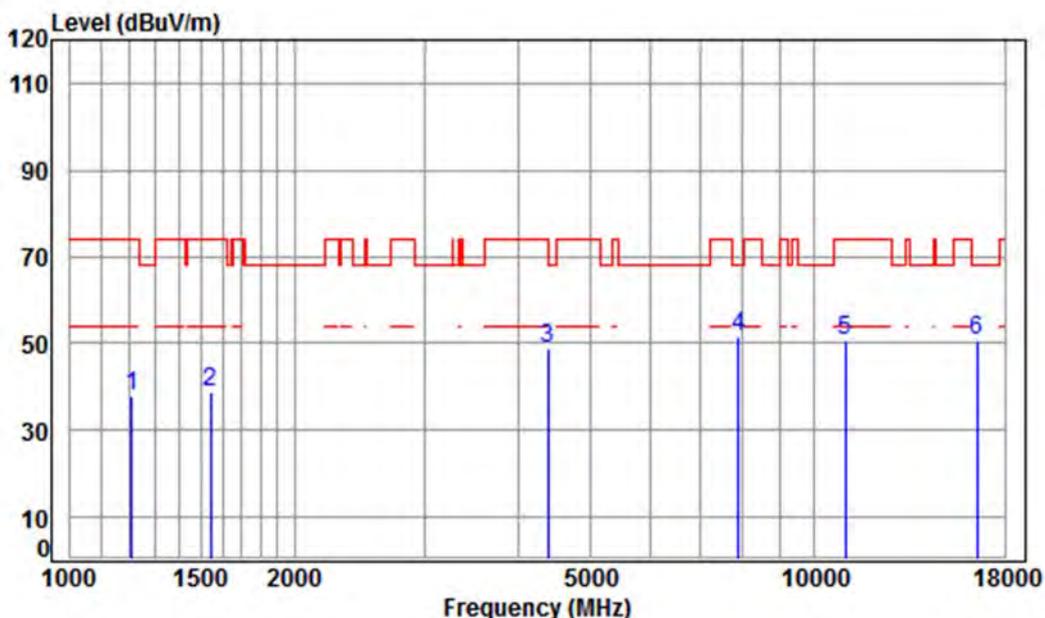


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5500 TX RSE
 : Ant 2 5G WIFI 11AC CH100

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1210.174	4.46	24.53	38.70	47.71	38.00	74.00	-36.00 peak
2	1542.733	5.42	26.00	38.70	46.22	38.94	74.00	-35.06 peak
3	4379.699	7.43	33.60	38.14	45.93	48.82	74.00	-25.18 peak
4 pp	7898.049	9.96	36.54	38.29	43.18	51.39	68.20	-16.81 peak
5	11000.000	11.63	37.70	36.40	37.67	50.60	74.00	-23.40 peak
6	16500.000	14.50	42.70	38.00	31.28	50.48	68.20	-17.72 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5580	Peak	Vertical
------------	----------------	-----------------	------	------	----------

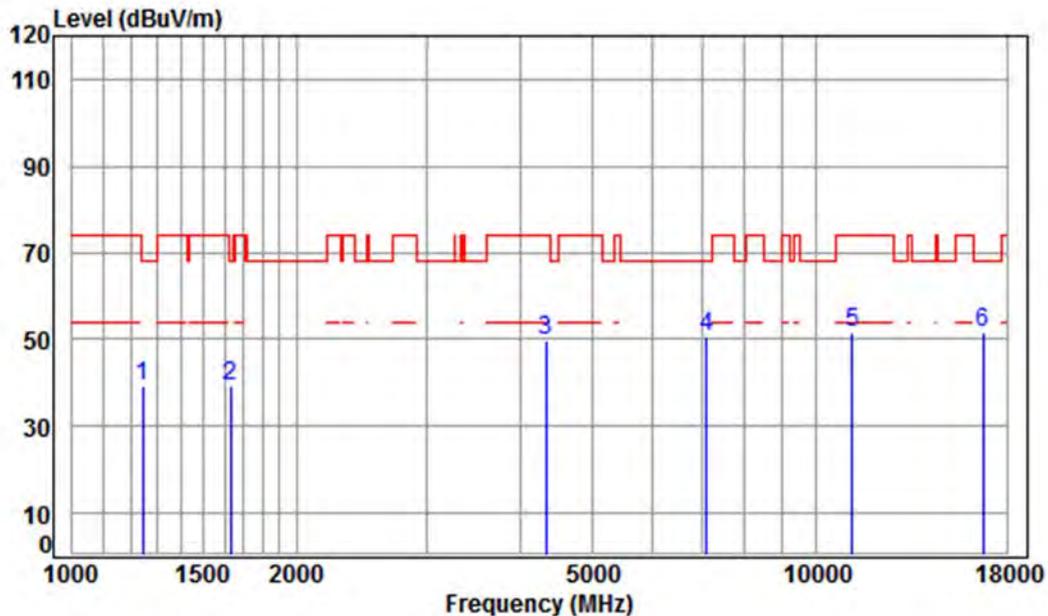

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5580 TX RSE

: Ant 2 5G WIFI 11AC CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	4.60	24.70	38.70	48.42	39.02	68.20	-29.18	peak
2	1634.543	5.31	26.40	38.70	46.10	39.11	68.20	-29.09	peak
3	4329.354	7.37	33.60	38.14	46.74	49.57	74.00	-24.43	peak
4	7117.542	10.10	36.45	38.21	42.39	50.73	68.20	-17.47	peak
5	11160.000	11.80	37.83	36.45	38.34	51.52	74.00	-22.48	peak
6	pp16740.000	15.57	42.75	38.10	31.37	51.59	68.20	-16.61	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 203 of 817

Test mode:	802.11ac(HT20)	Frequency(MHz):	5580	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

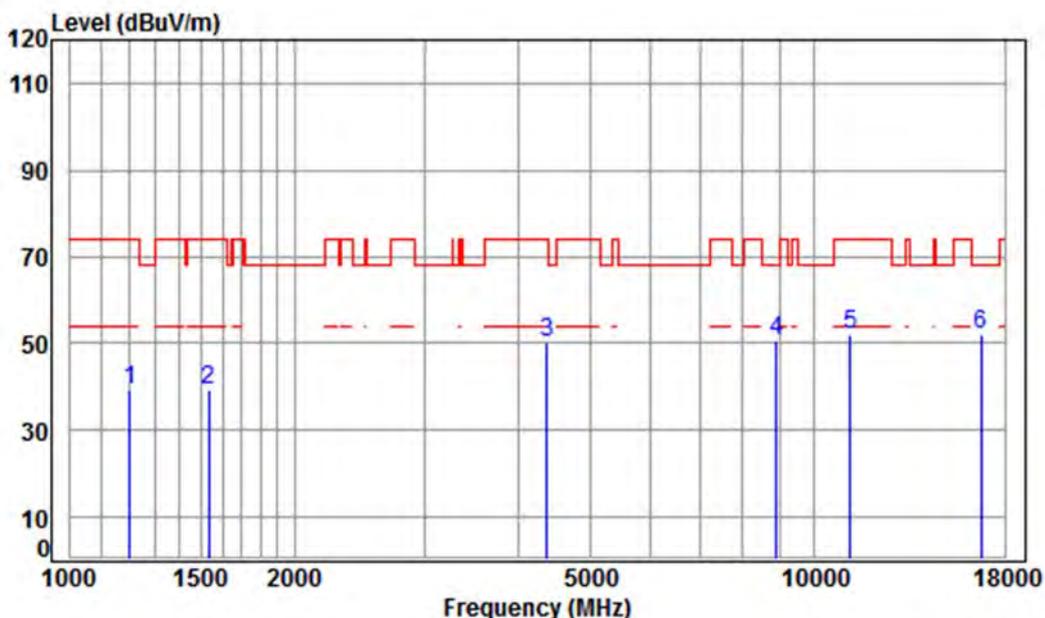


Condition: 3m HORIZONTAL
 Job No : 0217RG
 Mode : 5580 TX RSE
 : Ant 2 5G WIFI 11AC CH116

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	49.25	39.47	74.00	-34.53	peak
2	1533.841	5.44	25.96	38.70	46.32	39.02	74.00	-34.98	peak
3	4367.058	7.41	33.60	38.14	47.17	50.04	74.00	-23.96	peak
4	8891.725	10.37	36.47	38.21	41.98	50.61	68.20	-17.59	peak
5	11160.000	11.80	37.83	36.45	38.85	52.03	74.00	-21.97	peak
6	pp16740.000	15.57	42.75	38.10	31.60	51.82	68.20	-16.38	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Vertical
------------	----------------	-----------------	------	------	----------

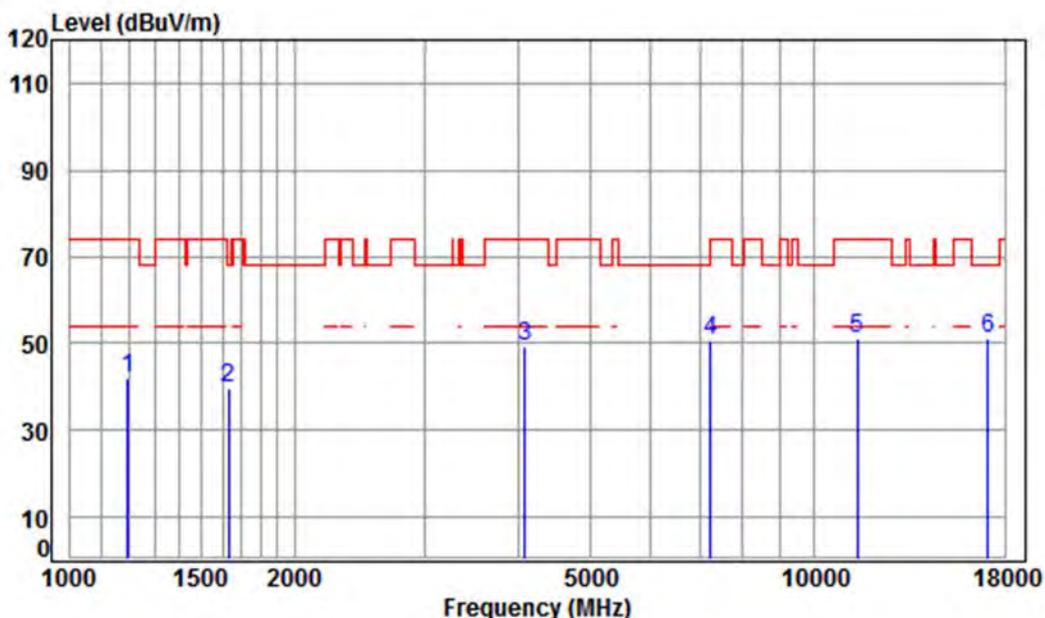


Condition: 3m VERTICAL
 Job No : 0217RG
 Mode : 5700 TX RSE
 : Ant 2 5G WIFI 11AC CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1196.264	4.40	24.46	38.70	51.62	41.78	74.00	-32.22 peak
2	1629.825	5.31	26.38	38.70	46.85	39.84	68.20	-28.36 peak
3	4086.182	7.08	33.60	38.11	46.73	49.30	74.00	-24.70 peak
4	7242.052	10.07	36.40	38.23	42.39	50.63	68.20	-17.57 peak
5	11400.000	12.04	38.02	36.52	37.50	51.04	74.00	-22.96 peak
6	pp17100.000	16.49	42.92	38.17	29.71	50.95	68.20	-17.25 peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5700	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

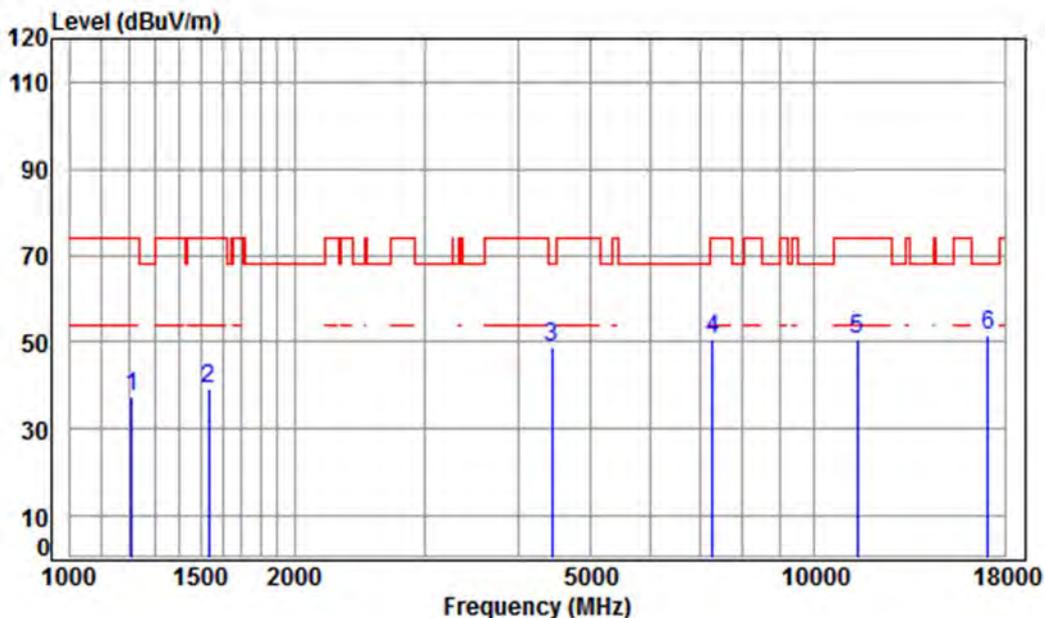

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5700 TX RSE

: Ant 2 5G WIFI 11AC CH140

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	47.31	37.60	74.00	-36.40	peak
2	1533.841	5.44	25.96	38.70	46.34	39.04	74.00	-34.96	peak
3	4443.453	7.50	33.60	38.15	45.66	48.61	68.20	-19.59	peak
4	7284.038	10.06	36.38	38.23	42.54	50.75	74.00	-23.25	peak
5	11400.000	12.04	38.02	36.52	37.04	50.58	74.00	-23.42	peak
6	pp17100.000	16.49	42.92	38.17	30.09	51.33	68.20	-16.87	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Vertical
------------	----------------	-----------------	------	------	----------

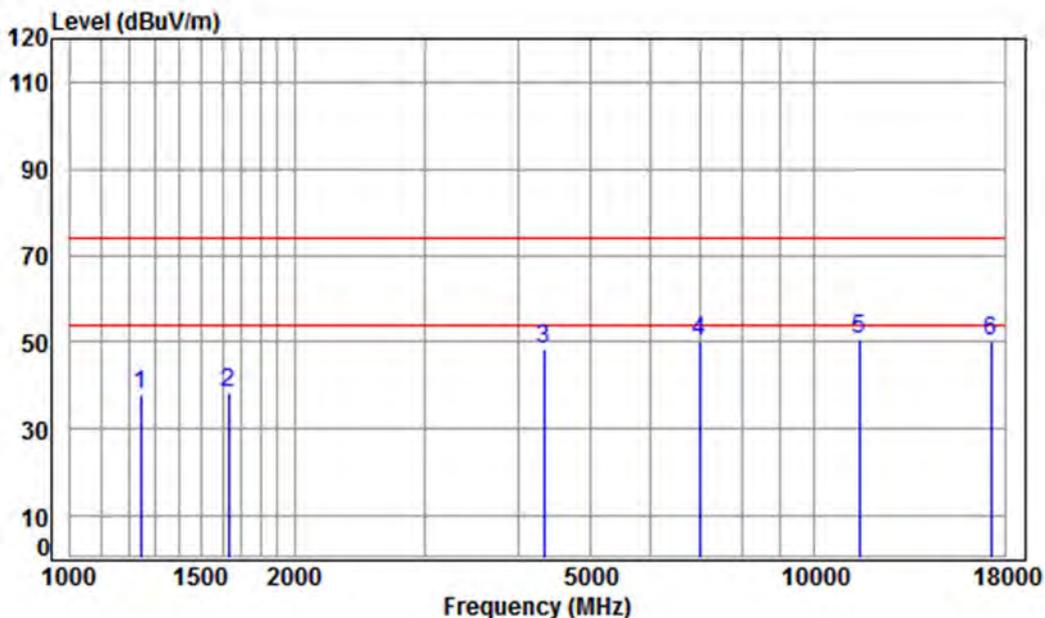

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5745 TX RSE

: Ant 2 5G WIFI 11AC CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1245.663	4.60	24.70	38.70	47.43	38.03	74.00	-35.97	peak
2	1629.825	5.31	26.38	38.70	45.26	38.25	74.00	-35.75	peak
3	4329.354	7.37	33.60	38.14	45.36	48.19	74.00	-25.81	peak
4	7015.420	10.13	36.49	38.20	41.77	50.19	74.00	-23.81	peak
5	pp11490.000	12.13	38.09	36.55	37.19	50.86	74.00	-23.14	peak
6	17235.000	16.18	43.08	38.13	29.24	50.37	74.00	-23.63	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5745	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

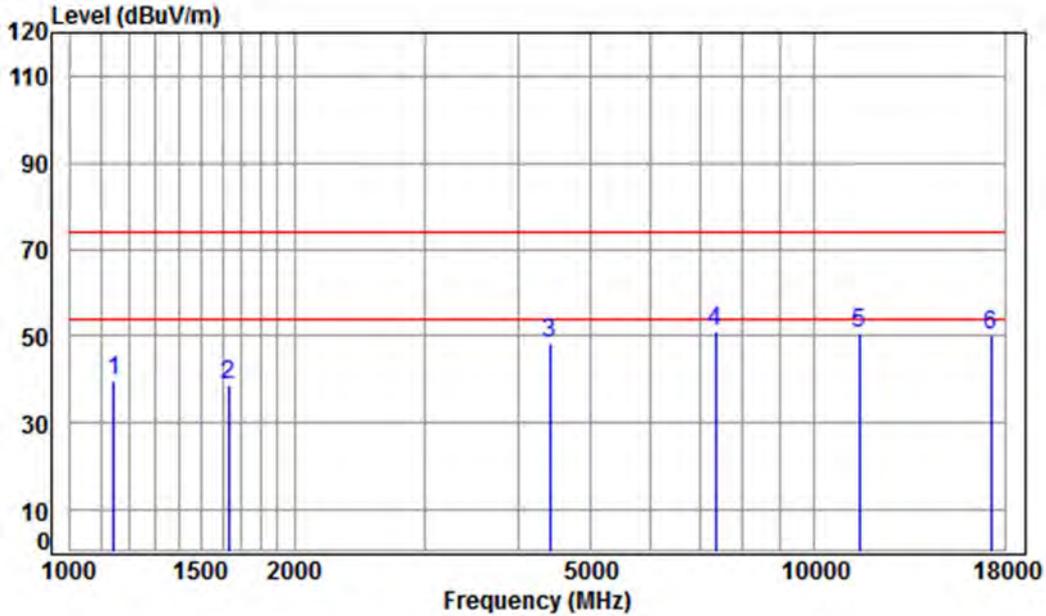

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5745 TX RSE

: Ant 2 5G WIFI 11AC CH149

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.01	39.71	74.00	-34.29	peak
2	1629.825	5.31	26.38	38.70	45.81	38.80	74.00	-35.20	peak
3	4405.090	7.46	33.60	38.14	45.31	48.23	74.00	-25.77	peak
4 pp	7368.741	10.03	36.35	38.24	42.88	51.02	74.00	-22.98	peak
5	11490.000	12.13	38.09	36.55	37.15	50.82	74.00	-23.18	peak
6	17235.000	16.18	43.08	38.13	28.93	50.06	74.00	-23.94	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Vertical
------------	----------------	-----------------	------	------	----------

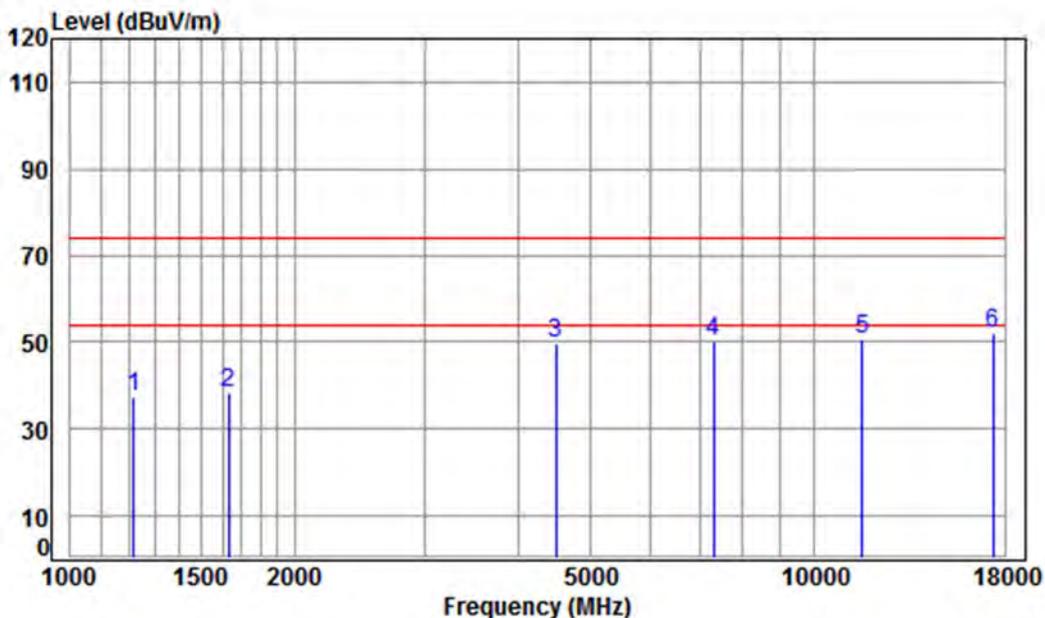

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5785 TX RSE

: Ant 2 5G WIFI 11AC CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1217.190	4.49	24.56	38.70	47.04	37.39	74.00	-36.61	peak
2	1634.543	5.31	26.40	38.70	45.33	38.34	74.00	-35.66	peak
3	4495.125	7.55	33.60	38.15	46.54	49.54	74.00	-24.46	peak
4	7305.122	10.05	36.38	38.23	41.99	50.19	74.00	-23.81	peak
5	11570.000	12.17	38.17	36.57	36.95	50.72	74.00	-23.28	peak
6	pp17355.000	15.92	43.23	38.09	30.76	51.82	74.00	-22.18	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5785	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

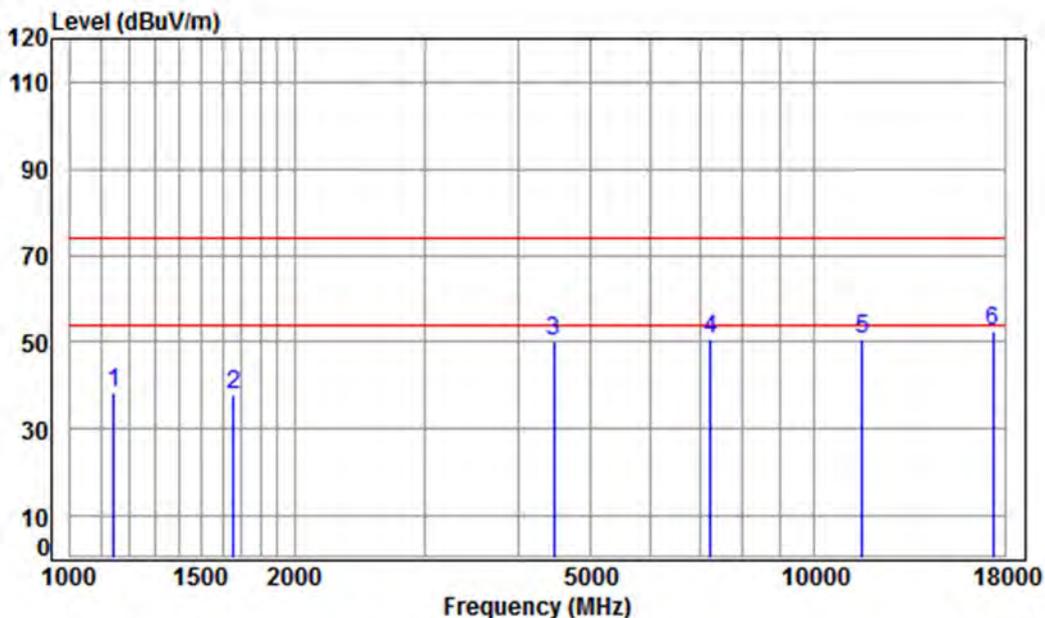

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5785 TX RSE

: Ant 2 5G WIFI 11AC CH157

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.46	38.16	74.00	-35.84	peak
2	1658.337	5.28	26.50	38.70	44.81	37.89	74.00	-36.11	peak
3	4469.214	7.53	33.60	38.15	47.17	50.15	74.00	-23.85	peak
4	7242.052	10.07	36.40	38.23	42.20	50.44	74.00	-23.56	peak
5	11570.000	12.17	38.17	36.57	36.95	50.72	74.00	-23.28	peak
6	pp17355.000	15.92	43.23	38.09	31.36	52.42	74.00	-21.58	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Vertical
------------	----------------	-----------------	------	------	----------

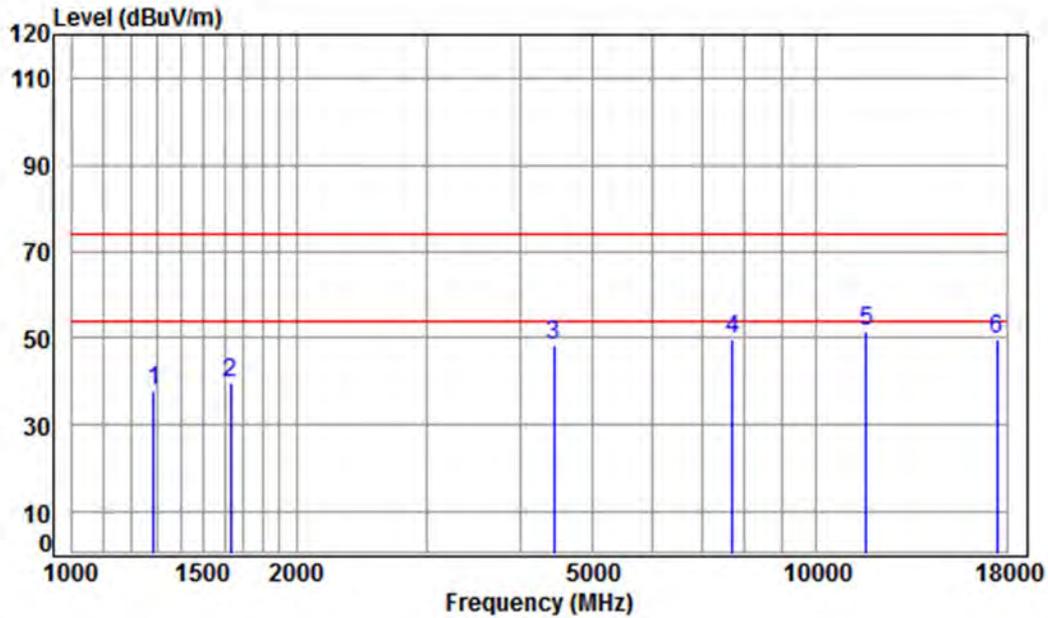

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5825 TX RSE

: Ant 2 5G WIFI 11AC CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1285.904	4.75	24.89	38.70	46.89	37.83	74.00	-36.17	peak
2	1629.825	5.31	26.38	38.70	46.62	39.61	74.00	-34.39	peak
3	4430.628	7.48	33.60	38.15	45.60	48.53	74.00	-25.47	peak
4	7717.518	9.98	36.43	38.27	41.61	49.75	74.00	-24.25	peak
5	pp11650.000	12.20	38.25	36.60	37.63	51.48	74.00	-22.52	peak
6	17475.000	15.65	43.37	38.06	28.75	49.71	74.00	-24.29	peak



Test mode:	802.11ac(HT20)	Frequency(MHz):	5825	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

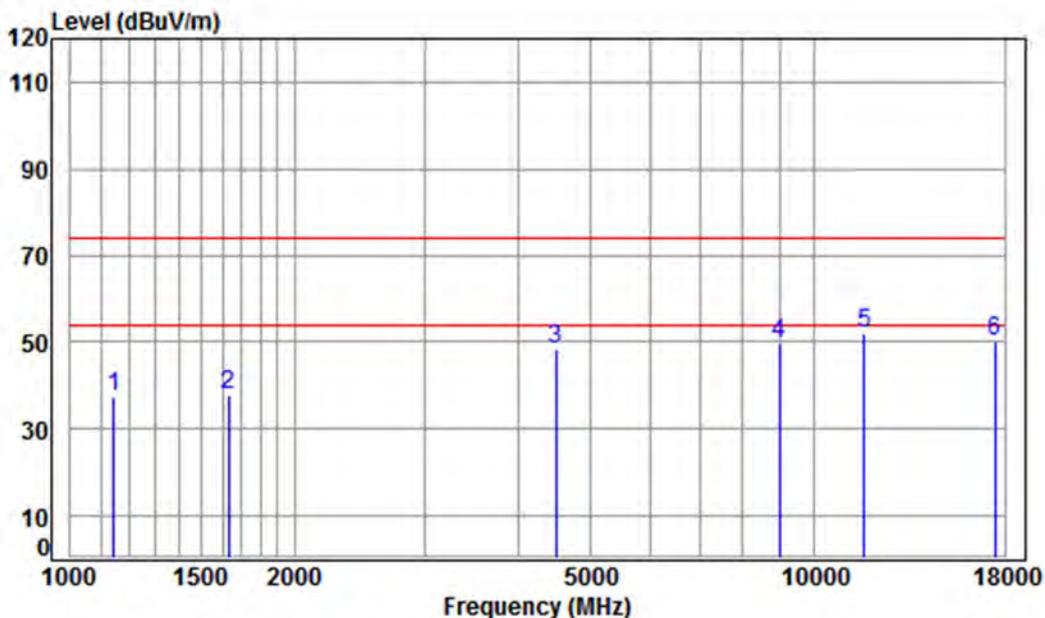

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5825 TX RSE

: Ant 2 5G WIFI 11AC CH165

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	47.63	37.33	74.00	-36.67 peak
2	1629.825	5.31	26.38	38.70	44.91	37.90	74.00	-36.10 peak
3	4495.125	7.55	33.60	38.15	45.44	48.44	74.00	-25.56 peak
4	8969.161	10.39	36.56	38.20	40.98	49.73	74.00	-24.27 peak
5	pp11650.000	12.20	38.25	36.60	38.22	52.07	74.00	-21.93 peak
6	17475.000	15.65	43.37	38.06	29.20	50.16	74.00	-23.84 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	---------------	-----------------	------	------	----------

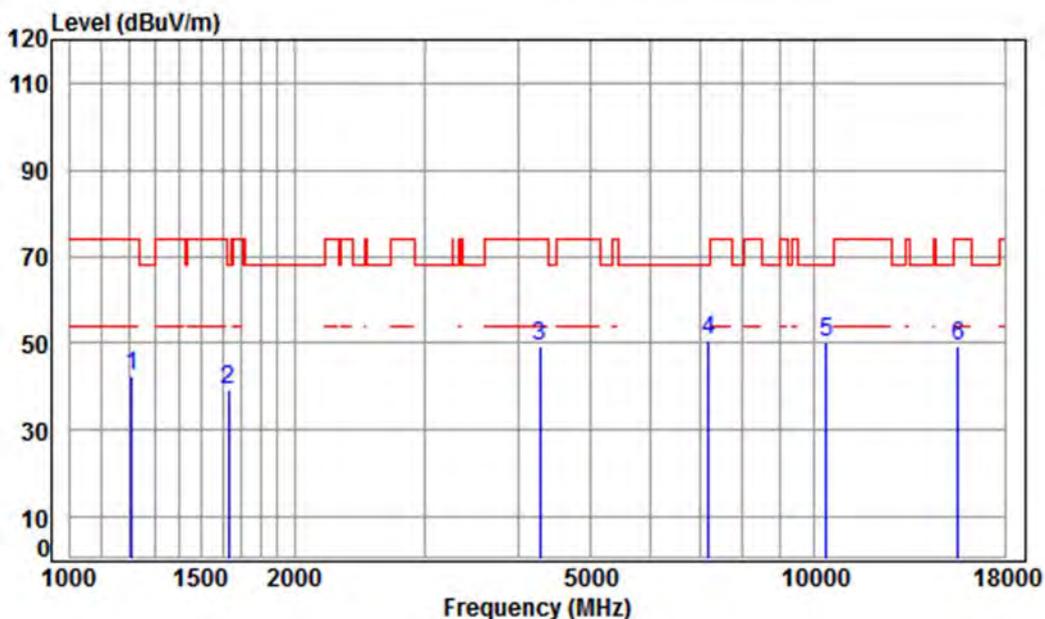

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 TX RSE

: Ant 2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	52.03	42.32	74.00	-31.68	peak
2	1629.825	5.31	26.38	38.70	46.28	39.27	68.20	-28.93	peak
3	4279.589	7.31	33.60	38.13	46.37	49.15	74.00	-24.85	peak
4 pp	7200.309	10.08	36.42	38.22	42.14	50.42	68.20	-17.78	peak
5	10380.000	11.21	37.22	36.34	37.92	50.01	68.20	-18.19	peak
6	15570.000	14.35	41.37	38.10	31.62	49.24	74.00	-24.76	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 213 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

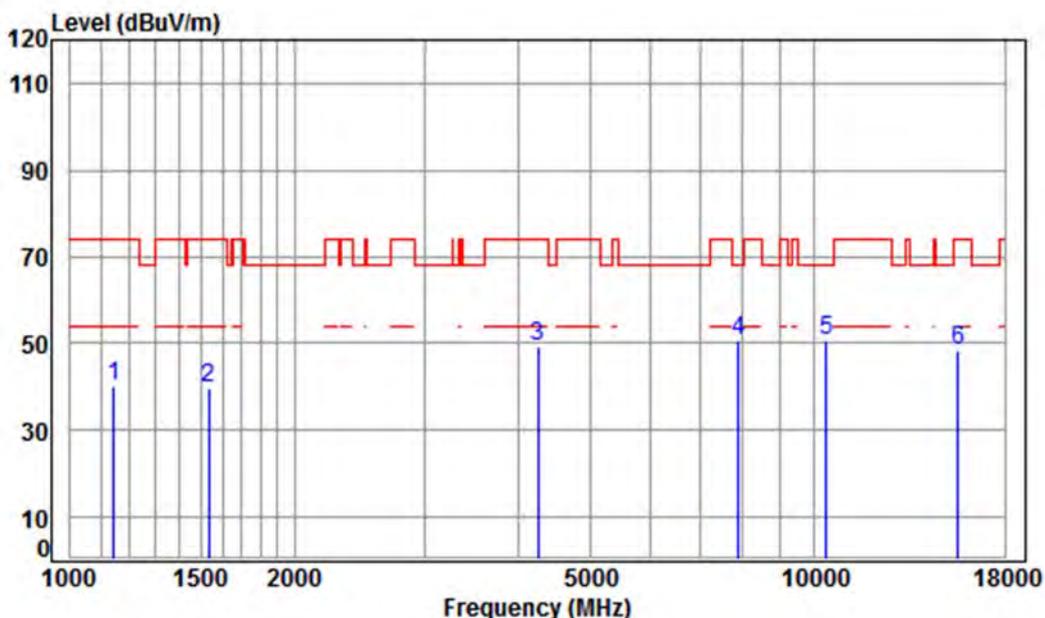

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5190 TX RSE

: Ant 2 5G WIFI 11N(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.59	40.29	74.00	-33.71	peak
2	1533.841	5.44	25.96	38.70	47.20	39.90	74.00	-34.10	peak
3	4254.921	7.28	33.60	38.13	46.62	49.37	74.00	-24.63	peak
4	7898.049	9.96	36.54	38.29	42.37	50.58	68.20	-17.62	peak
5	pp10380.000	11.21	37.22	36.34	38.69	50.78	68.20	-17.42	peak
6	15570.000	14.35	41.37	38.10	30.74	48.36	74.00	-25.64	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	---------------	-----------------	------	------	----------

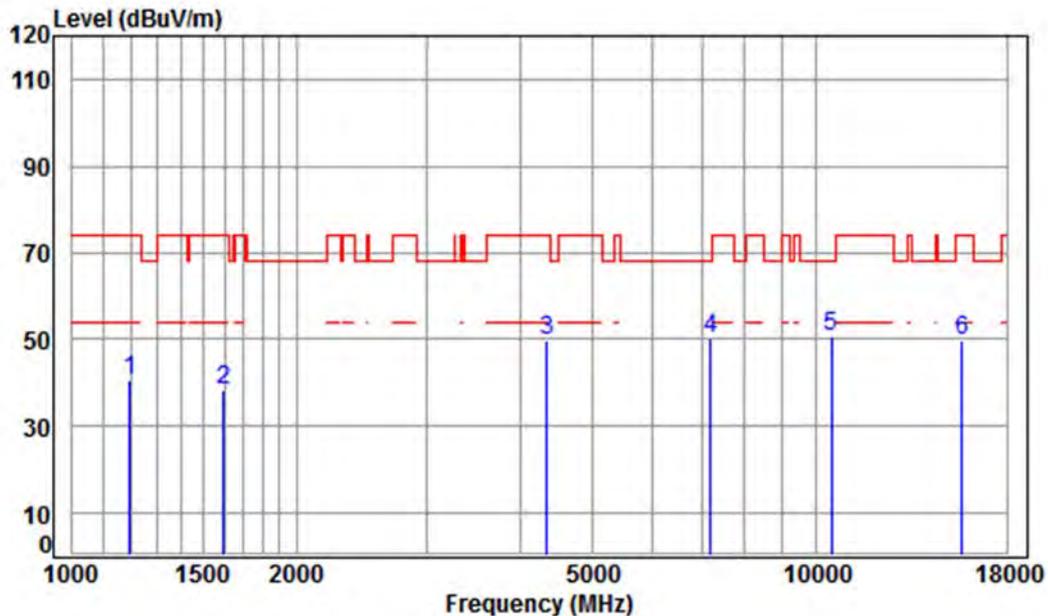

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5230 TX RSE

: Ant 2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	50.67	40.83	74.00	-33.17 peak
2	1597.181	5.35	26.24	38.70	45.64	38.53	74.00	-35.47 peak
3	4341.886	7.38	33.60	38.14	46.80	49.64	74.00	-24.36 peak
4	7200.309	10.08	36.42	38.22	42.03	50.31	68.20	-17.89 peak
5	pp10460.000	11.26	37.14	36.35	38.39	50.44	68.20	-17.76 peak
6	15690.000	14.53	41.32	38.01	32.09	49.93	74.00	-24.07 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

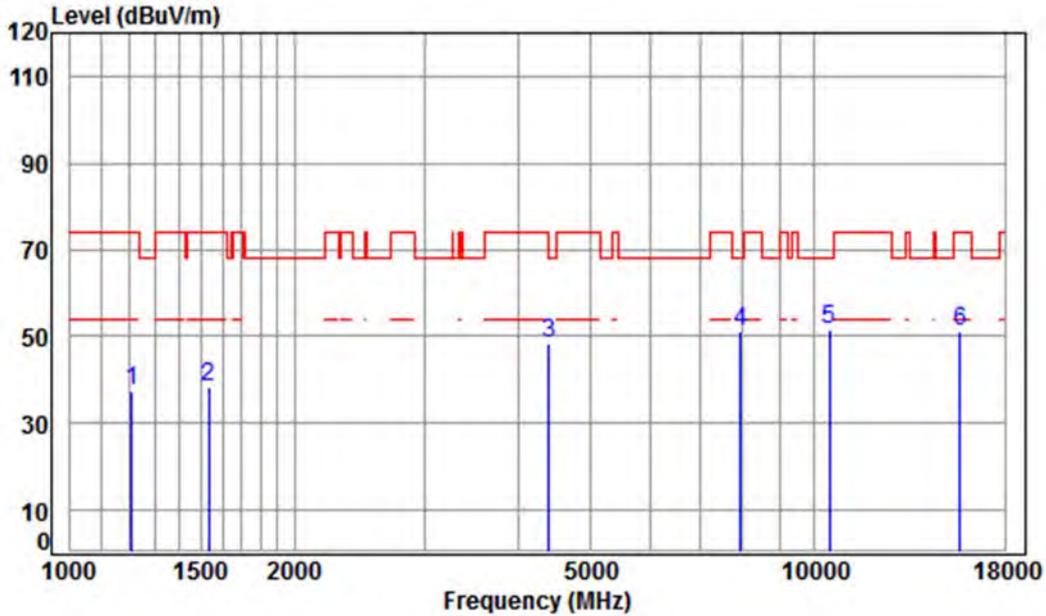

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5230 TX RSE

: Ant 2 5G WIFI 11N(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1210.174	4.46	24.53	38.70	46.96	37.25	74.00	-36.75 peak
2	1533.841	5.44	25.96	38.70	45.48	38.18	74.00	-35.82 peak
3	4392.376	7.44	33.60	38.14	45.43	48.33	74.00	-25.67 peak
4	7943.838	9.96	36.57	38.29	42.86	51.10	68.20	-17.10 peak
5	pp10460.000	11.26	37.14	36.35	39.39	51.44	68.20	-16.76 peak
6	15690.000	14.53	41.32	38.01	33.07	50.91	74.00	-23.09 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	---------------	-----------------	------	------	----------

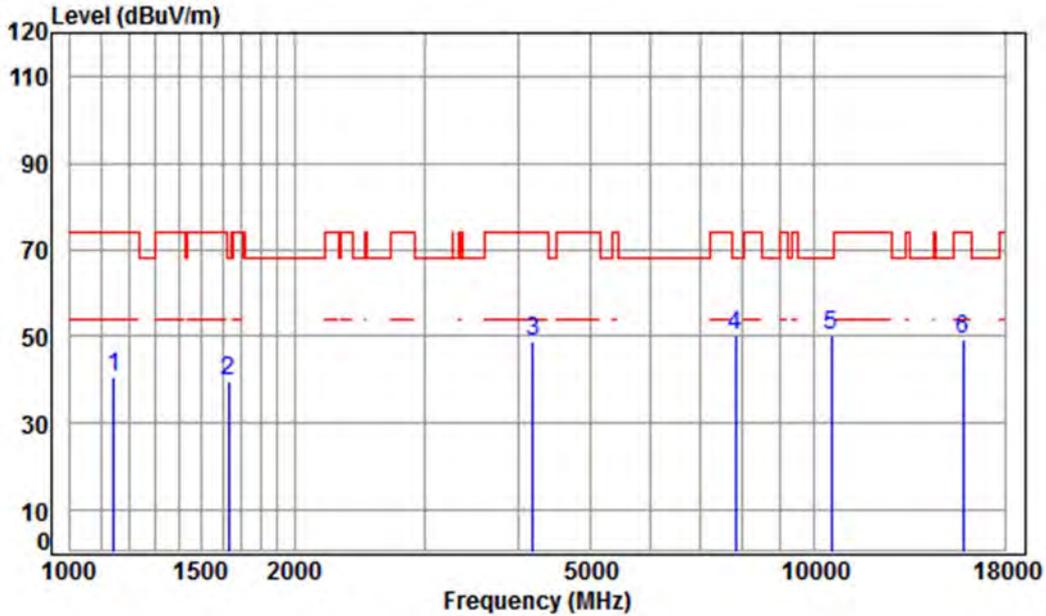

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5270 TX RSE

: Ant 2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.89	40.59	74.00	-33.41	peak
2	1629.825	5.31	26.38	38.70	46.69	39.68	68.20	-28.52	peak
3	4181.768	7.20	33.60	38.12	46.07	48.75	74.00	-25.25	peak
4 pp	7829.860	9.97	36.50	38.28	42.21	50.40	68.20	-17.80	peak
5	10540.000	11.32	37.15	36.36	38.19	50.30	68.20	-17.90	peak
6	15810.000	14.71	41.28	37.93	31.20	49.26	74.00	-24.74	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

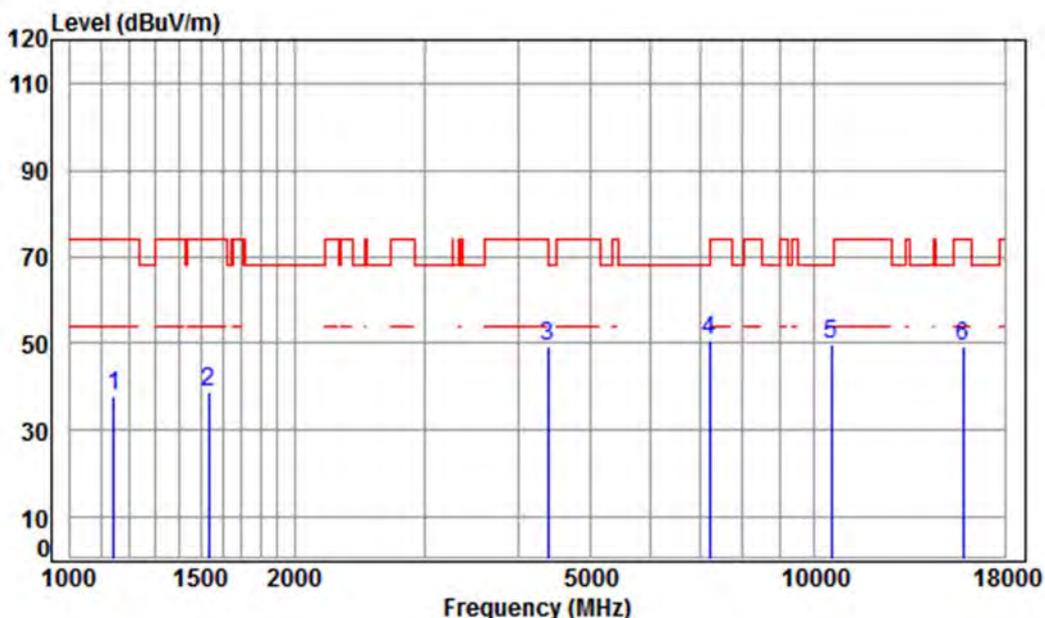

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5270 TX RSE

: Ant 2 5G WIFI 11N(40) CH54

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	48.28	37.98	74.00	-36.02 peak
2	1533.841	5.44	25.96	38.70	46.01	38.71	74.00	-35.29 peak
3	4379.699	7.43	33.60	38.14	46.61	49.50	74.00	-24.50 peak
4 pp	7221.150	10.07	36.41	38.22	42.33	50.59	68.20	-17.61 peak
5	10540.000	11.32	37.15	36.36	37.63	49.74	68.20	-18.46 peak
6	15810.000	14.71	41.28	37.93	31.01	49.07	74.00	-24.93 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	---------------	-----------------	------	------	----------

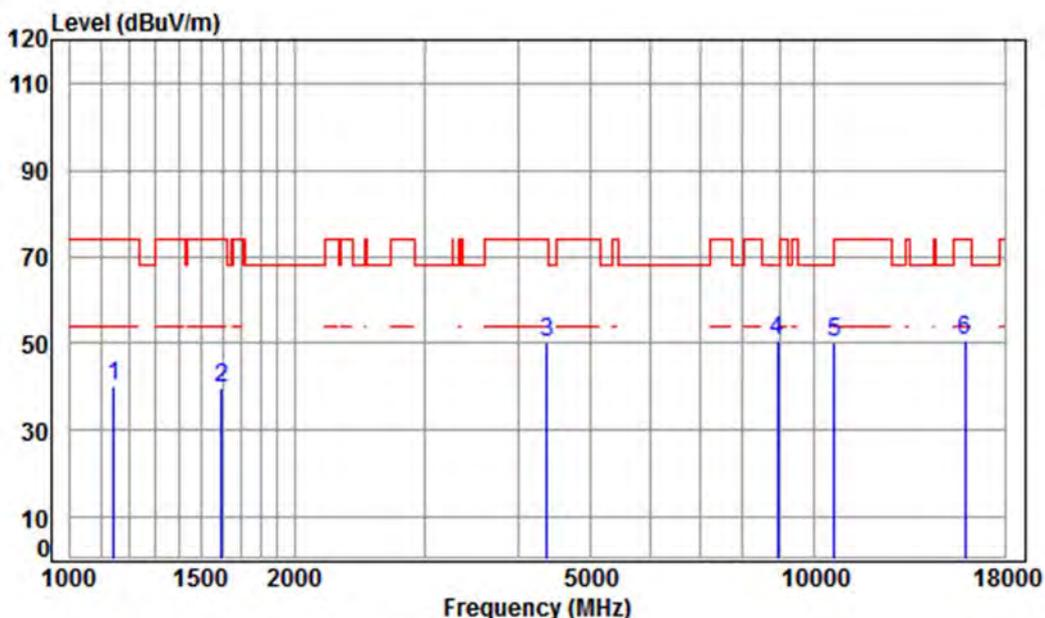

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5310 TX RSE

: Ant 2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	50.59	40.29	74.00	-33.71	peak
2	1597.181	5.35	26.24	38.70	46.62	39.51	74.00	-34.49	peak
3	4367.058	7.41	33.60	38.14	47.41	50.28	74.00	-23.72	peak
4 pp	8917.462	10.38	36.50	38.21	41.78	50.45	68.20	-17.75	peak
5	10620.000	11.37	37.25	36.36	38.09	50.35	74.00	-23.65	peak
6	15930.000	14.89	41.23	37.85	32.26	50.53	74.00	-23.47	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

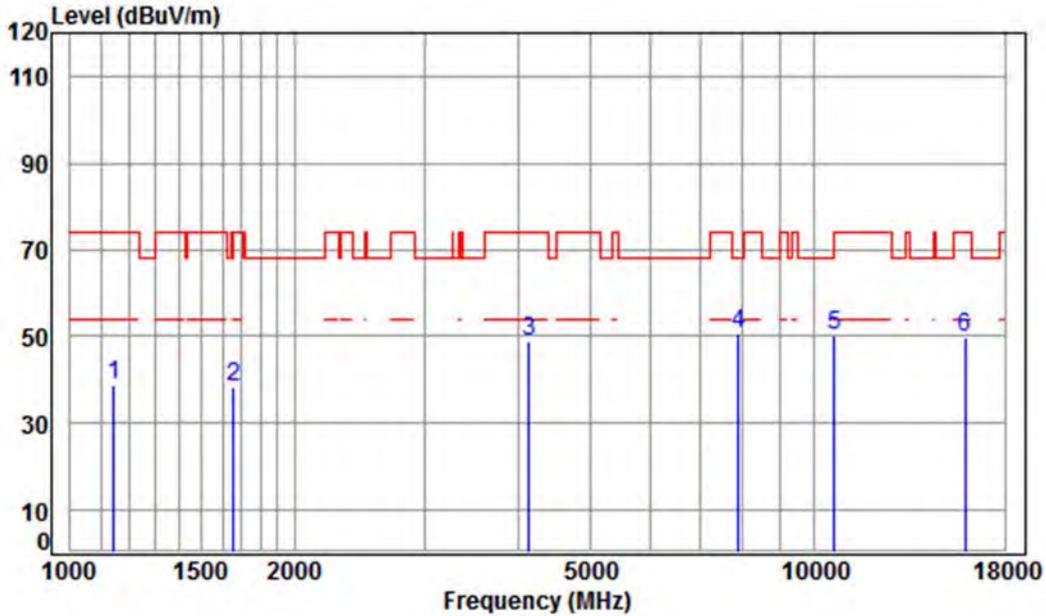

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5310 TX RSE

: Ant 2 5G WIFI 11N(40) CH62

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.15	38.85	74.00	-35.15	peak
2	1658.337	5.28	26.50	38.70	45.22	38.30	68.20	-29.90	peak
3	4133.699	7.14	33.60	38.11	46.42	49.05	74.00	-24.95	peak
4 pp	7898.049	9.96	36.54	38.29	42.26	50.47	68.20	-17.73	peak
5	10620.000	11.37	37.25	36.36	37.83	50.09	74.00	-23.91	peak
6	15930.000	14.89	41.23	37.85	31.54	49.81	74.00	-24.19	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	---------------	-----------------	------	------	----------

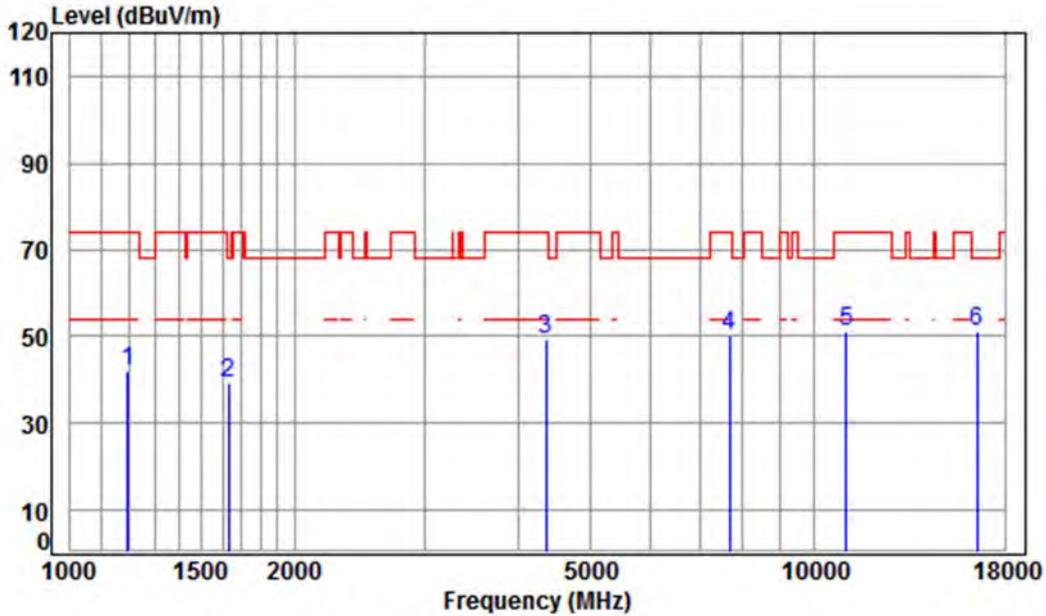

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 TX RSE

: Ant 2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	51.82	41.98	74.00	-32.02	peak
2	1634.543	5.31	26.40	38.70	46.37	39.38	68.20	-28.82	peak
3	4354.454	7.40	33.60	38.14	46.56	49.42	74.00	-24.58	peak
4	7695.244	9.98	36.42	38.27	42.23	50.36	74.00	-23.64	peak
5	11020.000	11.65	37.72	36.41	38.14	51.10	74.00	-22.90	peak
6	pp16530.000	14.63	42.71	38.02	31.62	50.94	68.20	-17.26	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 221 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

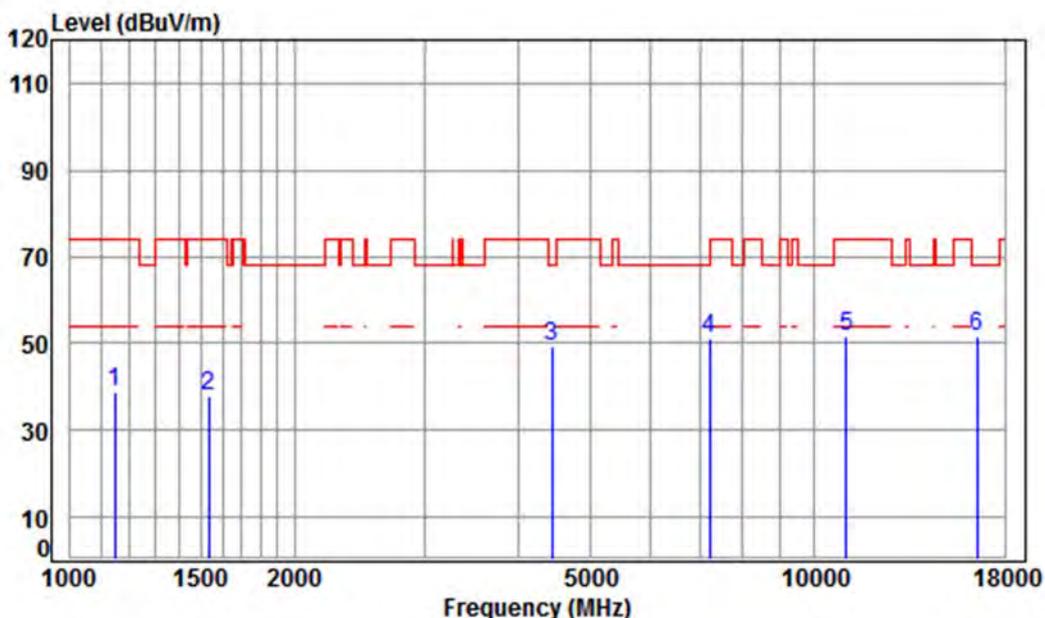

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5510 TX RSE

: Ant 2 5G WIFI 11N(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1148.823	4.21	24.22	38.70	49.23	38.96	74.00	-35.04	peak
2	1533.841	5.44	25.96	38.70	45.28	37.98	74.00	-36.02	peak
3	4430.628	7.48	33.60	38.15	46.16	49.09	68.20	-19.11	peak
4	7221.150	10.07	36.41	38.22	43.02	51.28	68.20	-16.92	peak
5	11020.000	11.65	37.72	36.41	38.54	51.50	74.00	-22.50	peak
6	pp16530.000	14.63	42.71	38.02	32.01	51.33	68.20	-16.87	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Vertical
------------	---------------	-----------------	------	------	----------

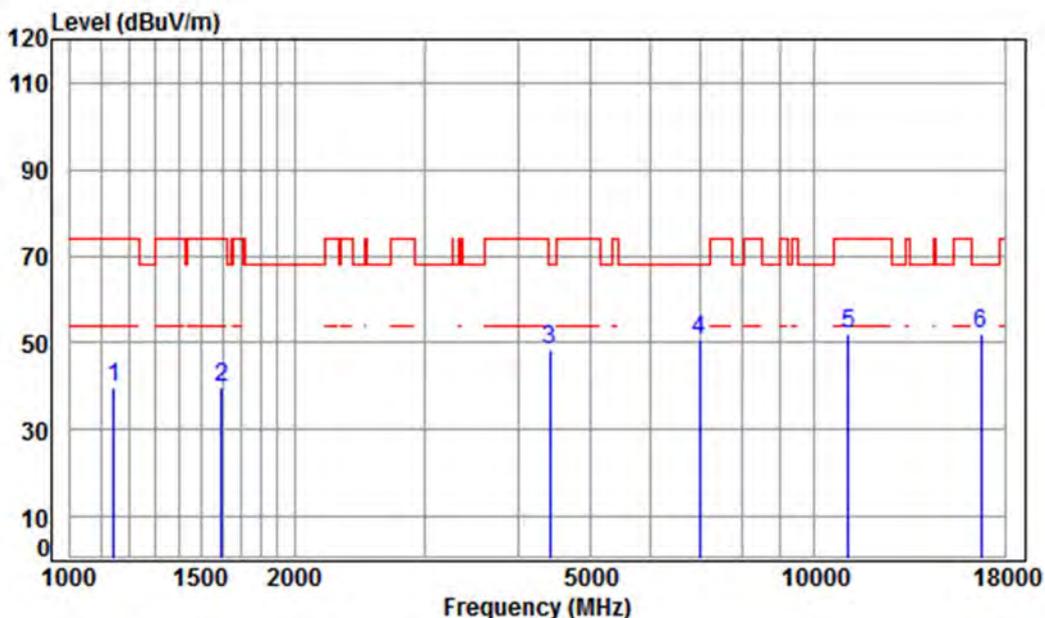

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5550 TX RSE

: Ant 2 5G WIFI 11N(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.84	39.54	74.00	-34.46	peak
2	1597.181	5.35	26.24	38.70	46.69	39.58	74.00	-34.42	peak
3	4405.090	7.46	33.60	38.14	45.66	48.58	68.20	-19.62	peak
4	7015.420	10.13	36.49	38.20	42.41	50.83	68.20	-17.37	peak
5	11100.000	11.73	37.78	36.43	38.77	51.85	74.00	-22.15	peak
6	pp16740.000	15.57	42.75	38.10	31.62	51.84	68.20	-16.36	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5550	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

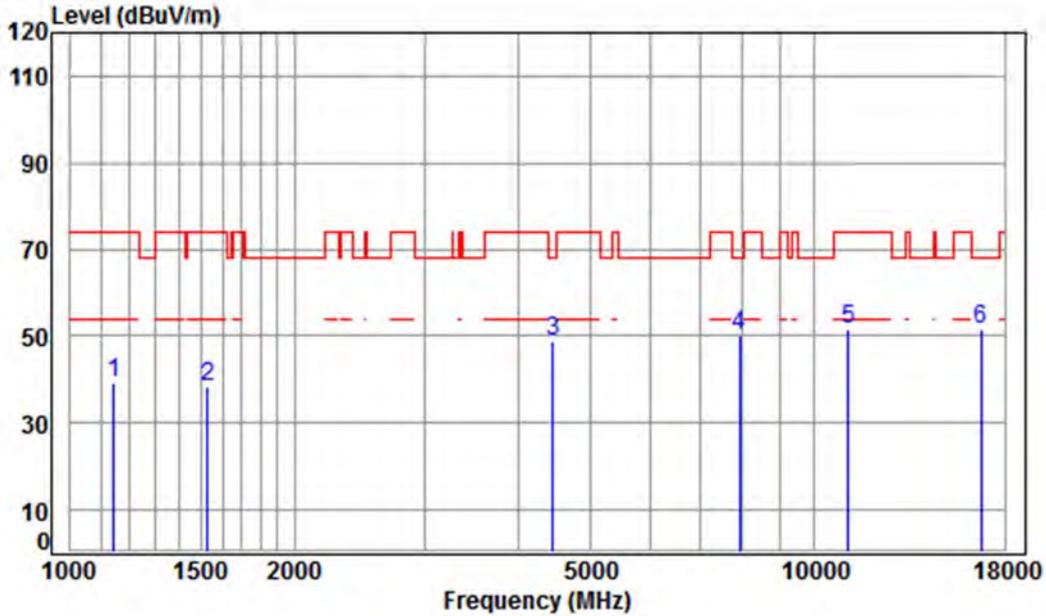

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5550 TX RSE

: Ant 2 5G WIFI 11N(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.58	39.28	74.00	-34.72	peak
2	1529.414	5.44	25.94	38.70	45.65	38.33	74.00	-35.67	peak
3	4456.315	7.51	33.60	38.15	45.92	48.88	68.20	-19.32	peak
4	7920.911	9.96	36.55	38.29	42.11	50.33	68.20	-17.87	peak
5	11100.000	11.73	37.78	36.43	38.53	51.61	74.00	-22.39	peak
6	pp16740.000	15.57	42.75	38.10	31.49	51.71	68.20	-16.49	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	---------------	-----------------	------	------	----------

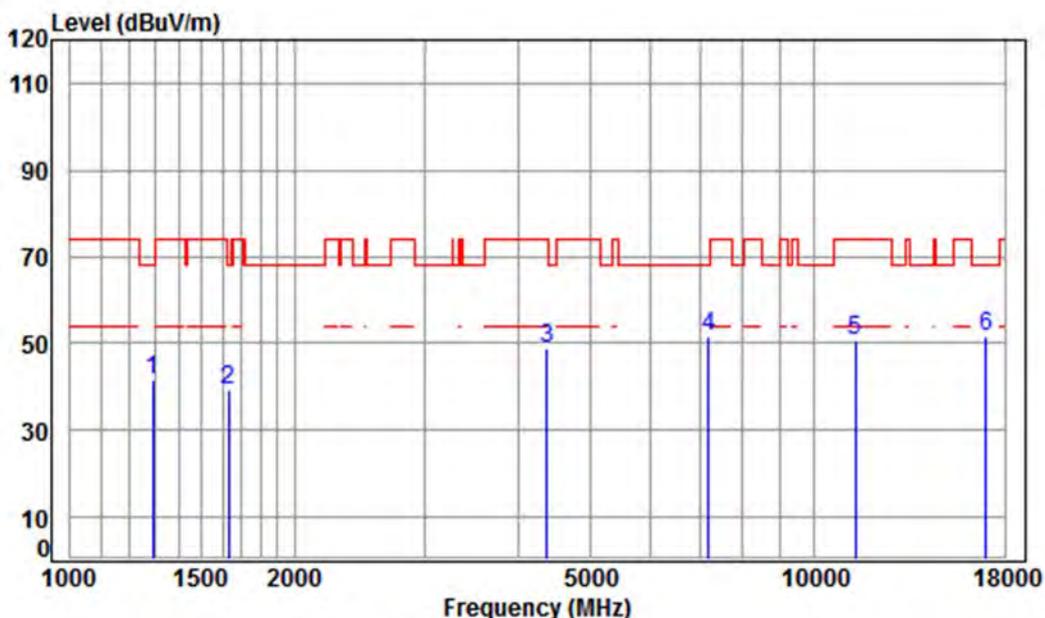

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5670 TX RSE

: Ant 2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1289.627	4.76	24.91	38.70	50.40	41.37	68.20	-26.83 peak
2	1634.543	5.31	26.40	38.70	46.19	39.20	68.20	-29.00 peak
3	4367.058	7.41	33.60	38.14	45.87	48.74	74.00	-25.26 peak
4	7200.309	10.08	36.42	38.22	43.07	51.35	68.20	-16.85 peak
5	11340.000	11.98	37.97	36.50	37.33	50.78	74.00	-23.22 peak
6	pp17010.000	16.69	42.81	38.20	30.32	51.62	68.20	-16.58 peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

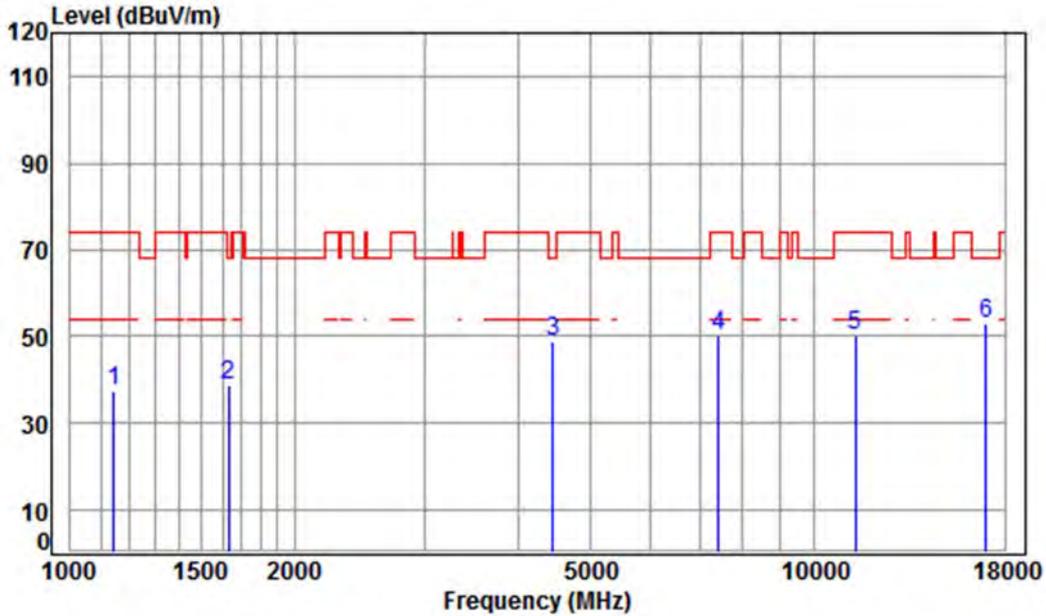

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5670 TX RSE

: Ant 2 5G WIFI 11N(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.91	37.61	74.00	-36.39	peak
2	1634.543	5.31	26.40	38.70	45.59	38.60	68.20	-29.60	peak
3	4456.315	7.51	33.60	38.15	45.77	48.73	68.20	-19.47	peak
4	7432.914	10.02	36.33	38.24	42.16	50.27	74.00	-23.73	peak
5	11340.000	11.98	37.97	36.50	36.89	50.34	74.00	-23.66	peak
6	pp17010.000	16.69	42.81	38.20	31.52	52.82	68.20	-15.38	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 226 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	---------------	-----------------	------	------	----------

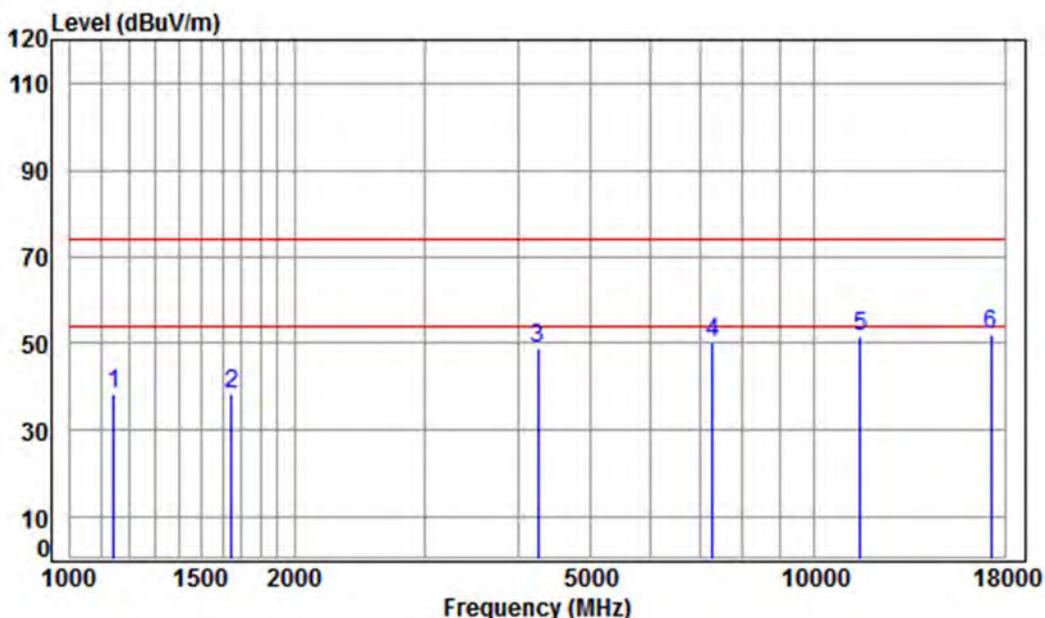

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5755 TX RSE

: Ant 2 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.74	38.44	74.00	-35.56	peak
2	1648.778	5.29	26.46	38.70	45.49	38.54	74.00	-35.46	peak
3	4242.641	7.27	33.60	38.13	45.89	48.63	74.00	-25.37	peak
4	7284.038	10.06	36.38	38.23	41.77	49.98	74.00	-24.02	peak
5	11510.000	12.14	38.11	36.56	37.66	51.35	74.00	-22.65	peak
6	pp17265.000	16.12	43.12	38.12	30.95	52.07	74.00	-21.93	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

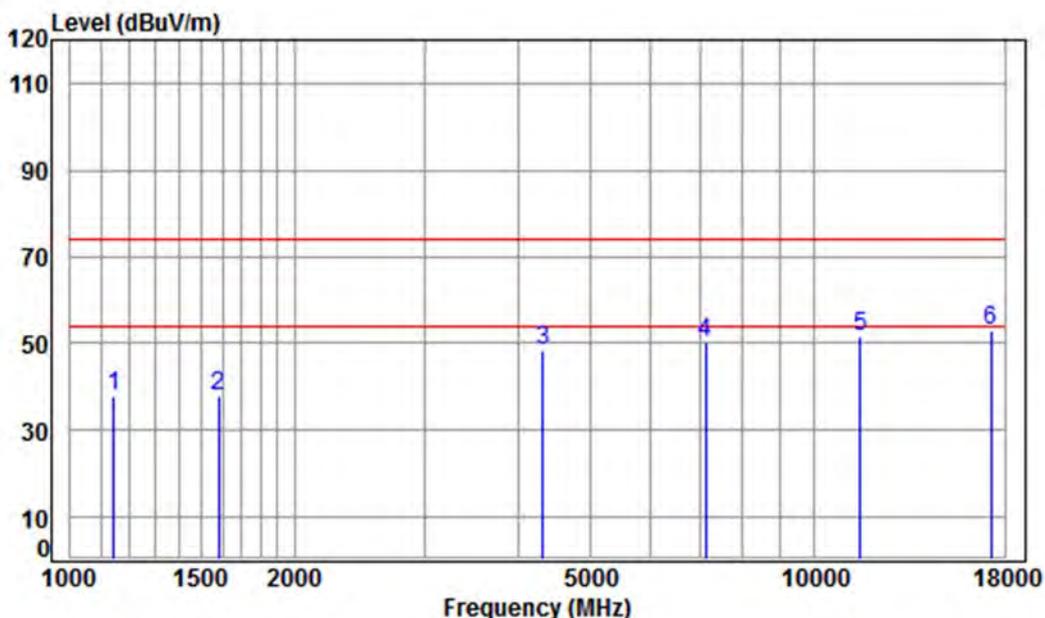

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5755 TX RSE

: Ant 2 5G WIFI 11N(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.05	37.75	74.00	-36.25	peak
2	1583.392	5.37	26.18	38.70	45.13	37.98	74.00	-36.02	peak
3	4316.859	7.36	33.60	38.13	45.55	48.38	74.00	-25.62	peak
4	7138.144	10.09	36.44	38.21	41.69	50.01	74.00	-23.99	peak
5	11510.000	12.14	38.11	36.56	37.90	51.59	74.00	-22.41	peak
6	pp17265.000	16.12	43.12	38.12	31.94	53.06	74.00	-20.94	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 228 of 817

Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	---------------	-----------------	------	------	----------

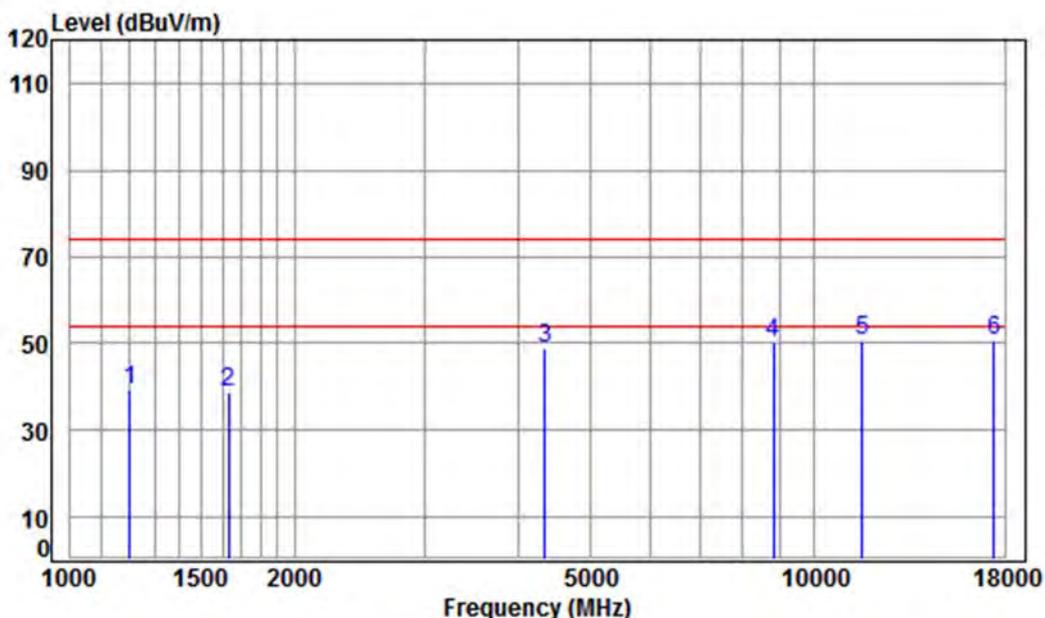

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5795 TX RSE

: Ant 2 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	48.88	39.10	74.00	-34.90	peak
2	1634.543	5.31	26.40	38.70	45.66	38.67	74.00	-35.33	peak
3	4341.886	7.38	33.60	38.14	45.91	48.75	74.00	-25.25	peak
4	8814.957	10.35	36.38	38.22	41.89	50.40	74.00	-23.60	peak
5	11590.000	12.17	38.19	36.58	36.79	50.57	74.00	-23.43	peak
6	pp17385.000	15.85	43.26	38.08	29.55	50.58	74.00	-23.42	peak



Test mode:	802.11n(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	---------------	-----------------	------	------	------------

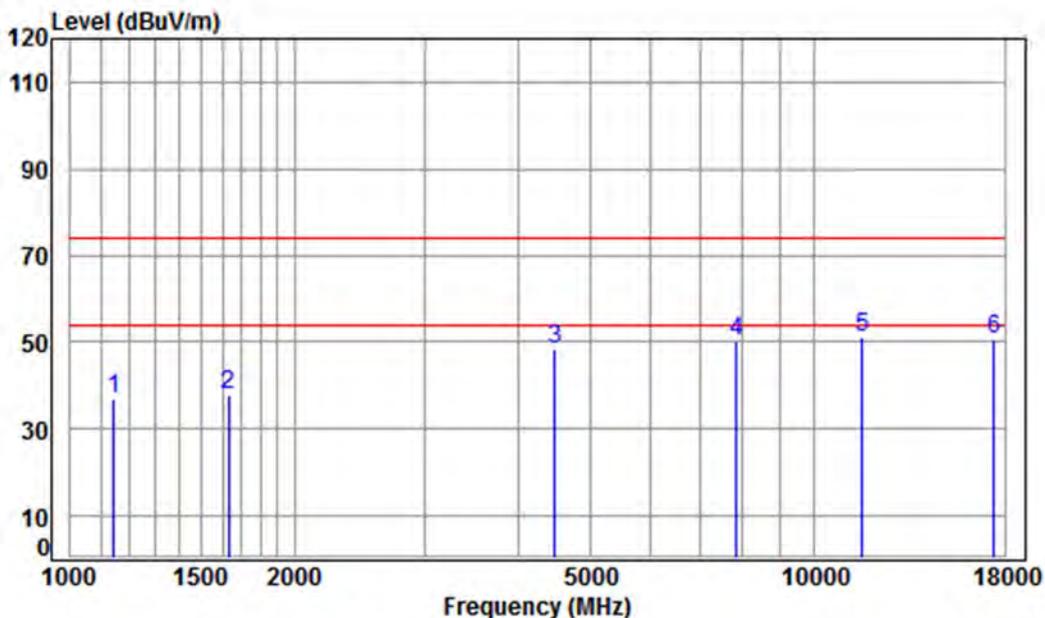

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5795 TX RSE

: Ant 2 5G WIFI 11N(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.45	37.15	74.00	-36.85	peak
2	1629.825	5.31	26.38	38.70	45.11	38.10	74.00	-35.90	peak
3	4482.150	7.54	33.60	38.15	45.60	48.59	74.00	-25.41	peak
4	7852.524	9.96	36.51	38.29	42.15	50.33	74.00	-23.67	peak
5	pp11590.000	12.17	38.19	36.58	37.17	50.95	74.00	-23.05	peak
6	17385.000	15.85	43.26	38.08	29.65	50.68	74.00	-23.32	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Vertical
------------	----------------	-----------------	------	------	----------

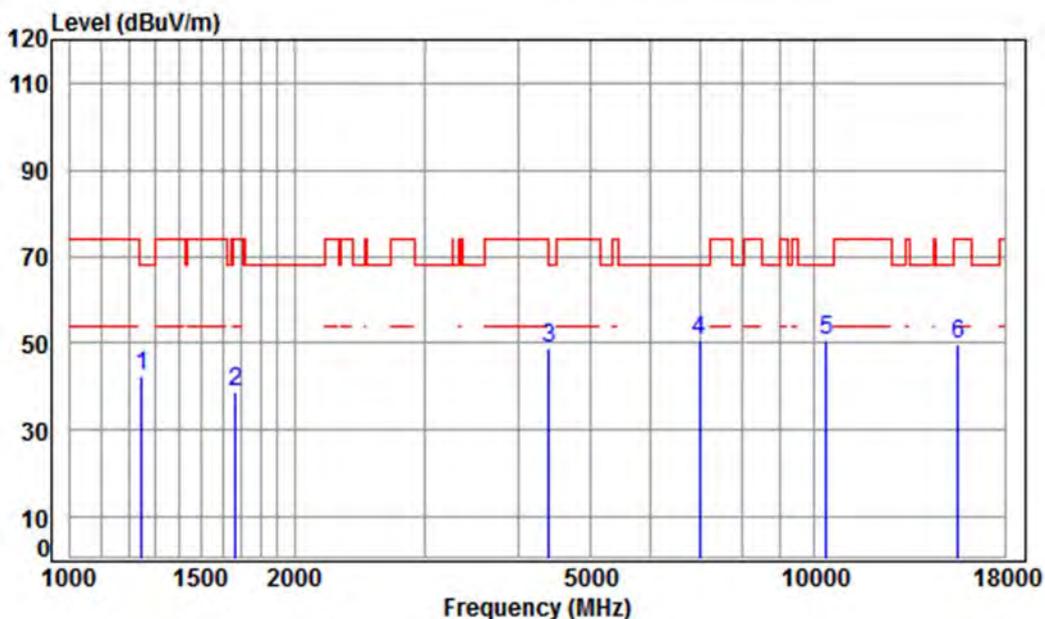

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5190 TX RSE

: Ant 2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1249.269	4.61	24.72	38.70	51.90	42.53	68.20	-25.67	peak
2	1667.951	5.27	26.54	38.70	45.84	38.95	74.00	-35.05	peak
3	4392.376	7.44	33.60	38.14	45.74	48.64	74.00	-25.36	peak
4 pp	7015.420	10.13	36.49	38.20	42.07	50.49	68.20	-17.71	peak
5	10380.000	11.21	37.22	36.34	38.35	50.44	68.20	-17.76	peak
6	15570.000	14.35	41.37	38.10	32.05	49.67	74.00	-24.33	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 231 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5190	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

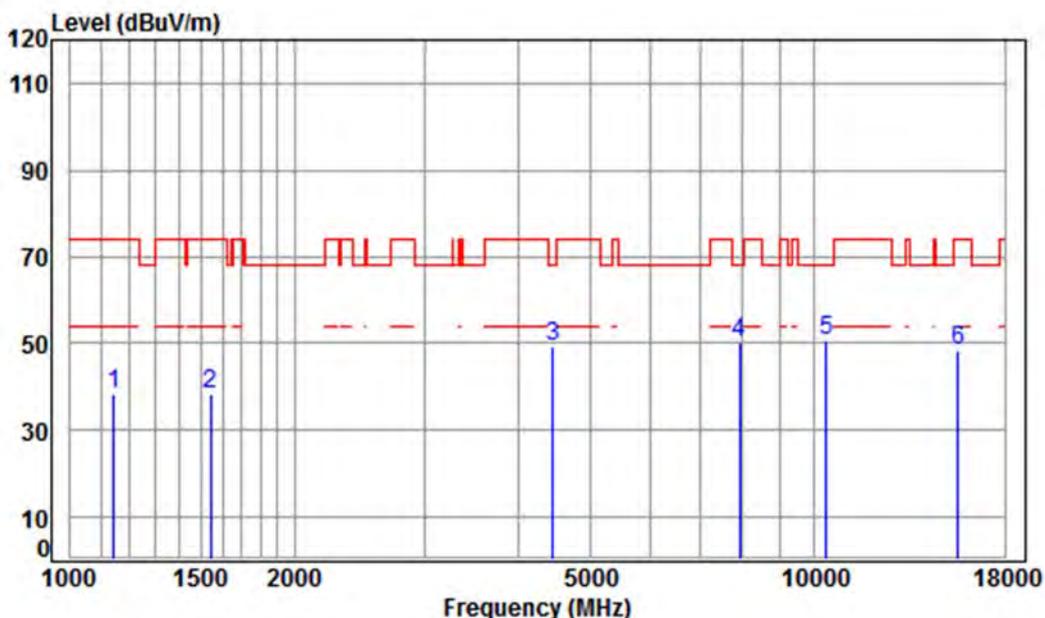

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5190 TX RSE

: Ant 2 5G WIFI 11AC(40) CH38

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.81	38.51	74.00	-35.49 peak
2	1542.733	5.42	26.00	38.70	45.48	38.20	74.00	-35.80 peak
3	4456.315	7.51	33.60	38.15	46.45	49.41	68.20	-18.79 peak
4	7920.911	9.96	36.55	38.29	42.11	50.33	68.20	-17.87 peak
5	pp10380.000	11.21	37.22	36.34	38.78	50.87	68.20	-17.33 peak
6	15570.000	14.35	41.37	38.10	30.95	48.57	74.00	-25.43 peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Vertical
------------	----------------	-----------------	------	------	----------

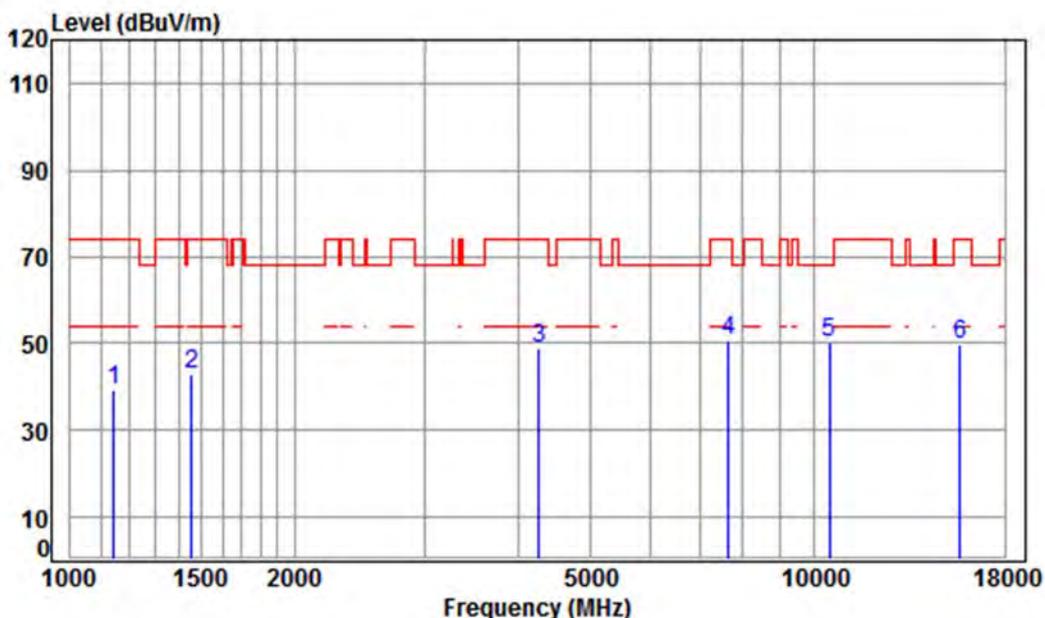

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5230 TX RSE

: Ant 2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.44	39.14	74.00	-34.86	peak
2	1456.081	5.34	25.62	38.70	50.82	43.08	74.00	-30.92	peak
3	4267.237	7.30	33.60	38.13	45.93	48.70	74.00	-25.30	peak
4	7650.888	9.98	36.39	38.27	42.43	50.53	74.00	-23.47	peak
5	pp10460.000	11.26	37.14	36.35	38.29	50.34	68.20	-17.86	peak
6	15690.000	14.53	41.32	38.01	31.81	49.65	74.00	-24.35	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5230	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

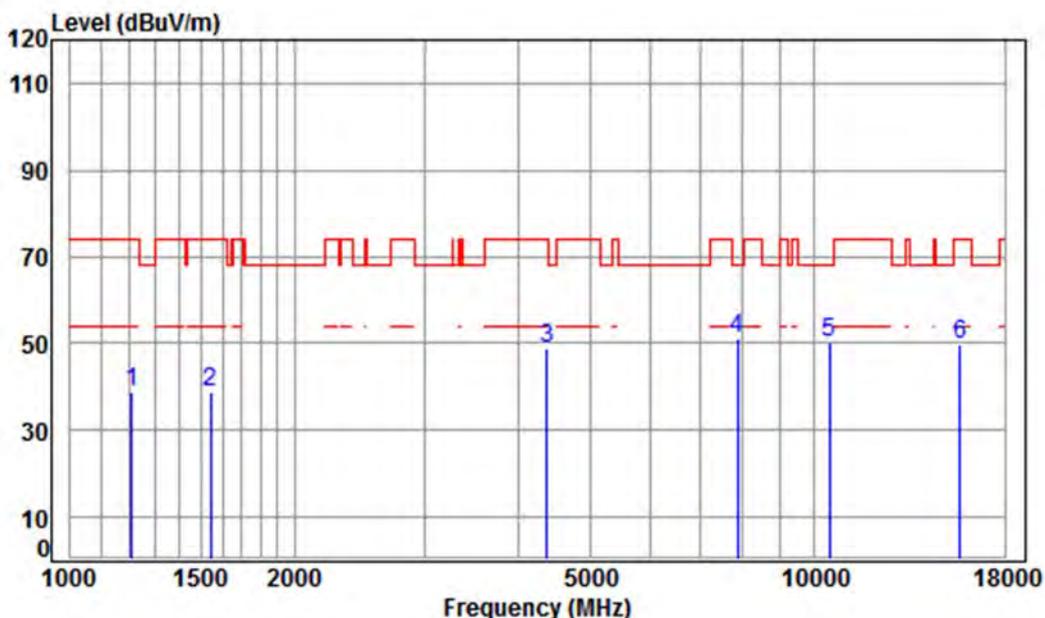

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5230 TX RSE

: Ant 2 5G WIFI 11AC(40) CH46

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	48.35	38.64	74.00	-35.36	peak
2	1542.733	5.42	26.00	38.70	46.22	38.94	74.00	-35.06	peak
3	4367.058	7.41	33.60	38.14	46.13	49.00	74.00	-25.00	peak
4 pp	7875.254	9.96	36.53	38.29	42.79	50.99	68.20	-17.21	peak
5	10460.000	11.26	37.14	36.35	38.10	50.15	68.20	-18.05	peak
6	15690.000	14.53	41.32	38.01	31.70	49.54	74.00	-24.46	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Vertical
------------	----------------	-----------------	------	------	----------

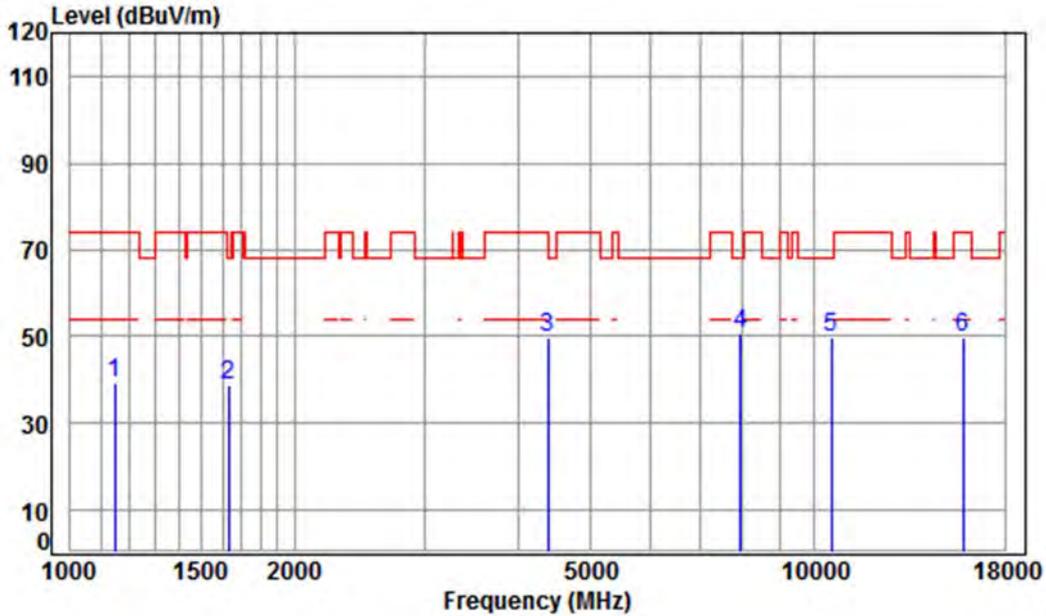

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5270 TX RSE

: Ant 2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1148.823	4.21	24.22	38.70	49.34	39.07	74.00	-34.93	peak
2	1634.543	5.31	26.40	38.70	45.55	38.56	68.20	-29.64	peak
3	4379.699	7.43	33.60	38.14	47.00	49.89	74.00	-24.11	peak
4	7943.838	9.96	36.57	38.29	42.20	50.44	68.20	-17.76	peak
5	10540.000	11.32	37.15	36.36	37.85	49.96	68.20	-18.24	peak
6	15810.000	14.71	41.28	37.93	31.69	49.75	74.00	-24.25	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5270	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

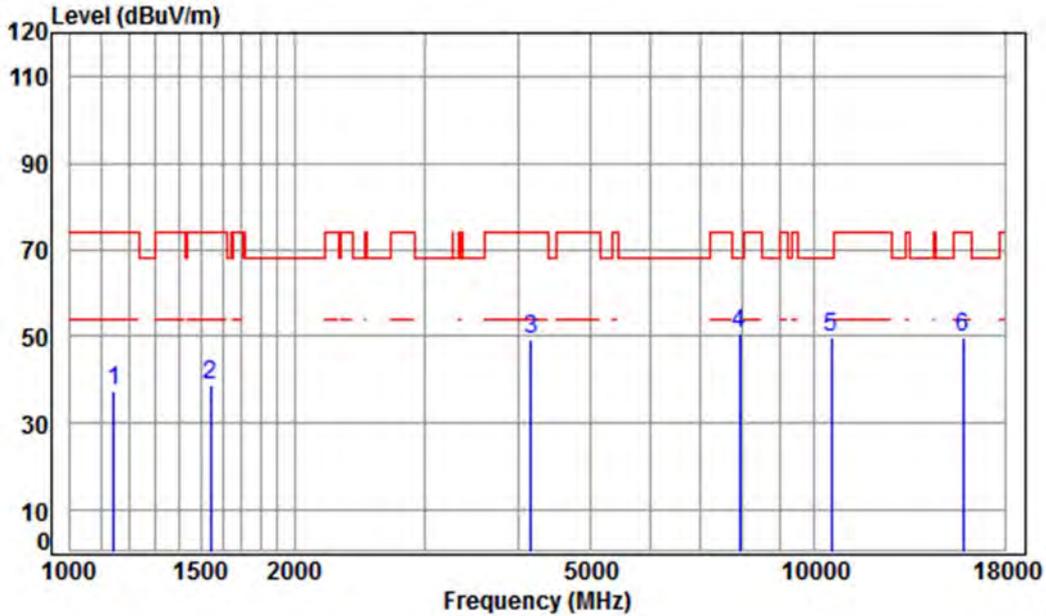

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5270 TX RSE

: Ant 2 5G WIFI 11AC(40) CH54

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	47.79	37.49	74.00	-36.51	peak
2	1542.733	5.42	26.00	38.70	45.94	38.66	74.00	-35.34	peak
3	4157.664	7.17	33.60	38.12	46.67	49.32	74.00	-24.68	peak
4 pp	7920.911	9.96	36.55	38.29	42.51	50.73	68.20	-17.47	peak
5	10540.000	11.32	37.15	36.36	37.81	49.92	68.20	-18.28	peak
6	15810.000	14.71	41.28	37.93	31.49	49.55	74.00	-24.45	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Vertical
------------	----------------	-----------------	------	------	----------

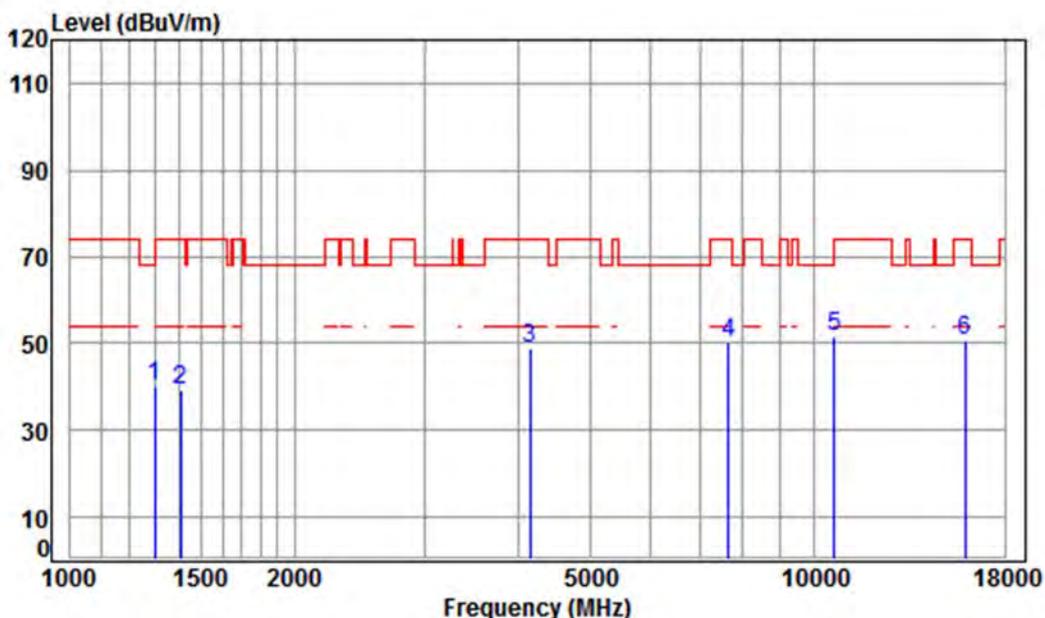

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5310 TX RSE

: Ant 2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1297.103	4.79	24.94	38.70	49.01	40.04	68.20	-28.16	peak
2	1406.443	5.17	25.42	38.70	47.36	39.25	74.00	-34.75	peak
3	4145.664	7.16	33.60	38.12	46.34	48.98	74.00	-25.02	peak
4	7650.888	9.98	36.39	38.27	42.04	50.14	74.00	-23.86	peak
5	pp10620.000	11.37	37.25	36.36	39.15	51.41	74.00	-22.59	peak
6	15930.000	14.89	41.23	37.85	32.23	50.50	74.00	-23.50	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5310	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

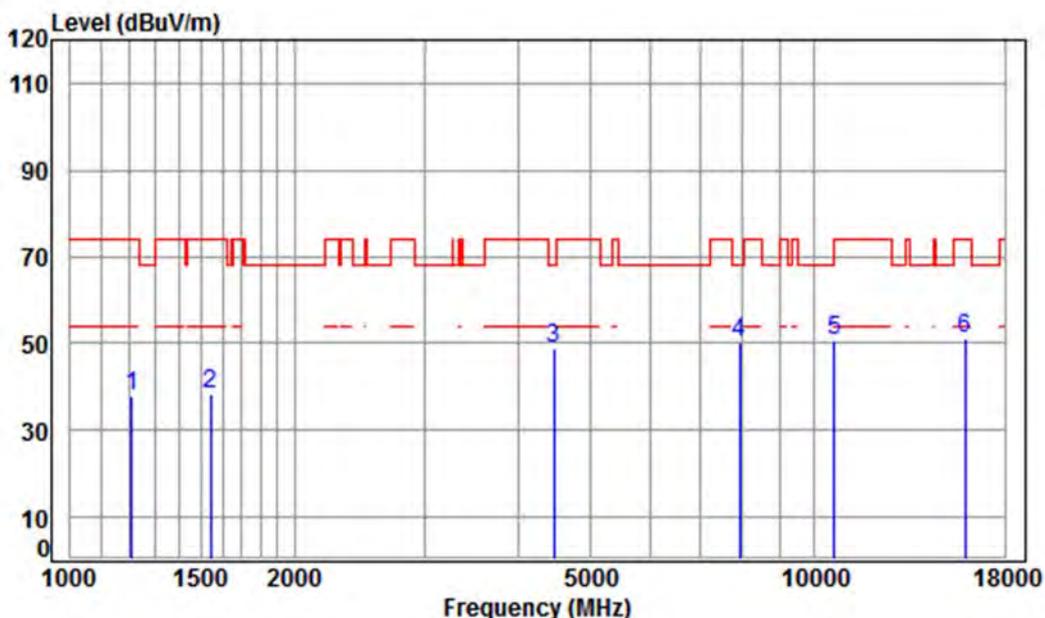

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5310 TX RSE

: Ant 2 5G WIFI 11AC(40) CH62

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	47.71	38.00	-36.00	peak
2	1542.733	5.42	26.00	38.70	45.60	38.32	-35.68	peak
3	4469.214	7.53	33.60	38.15	46.00	48.98	-19.22	peak
4	pp 7920.911	9.96	36.55	38.29	41.94	50.16	-18.04	peak
5	10620.000	11.37	37.25	36.36	38.61	50.87	-23.13	peak
6	15930.000	14.89	41.23	37.85	32.65	50.92	-23.08	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Vertical
------------	----------------	-----------------	------	------	----------

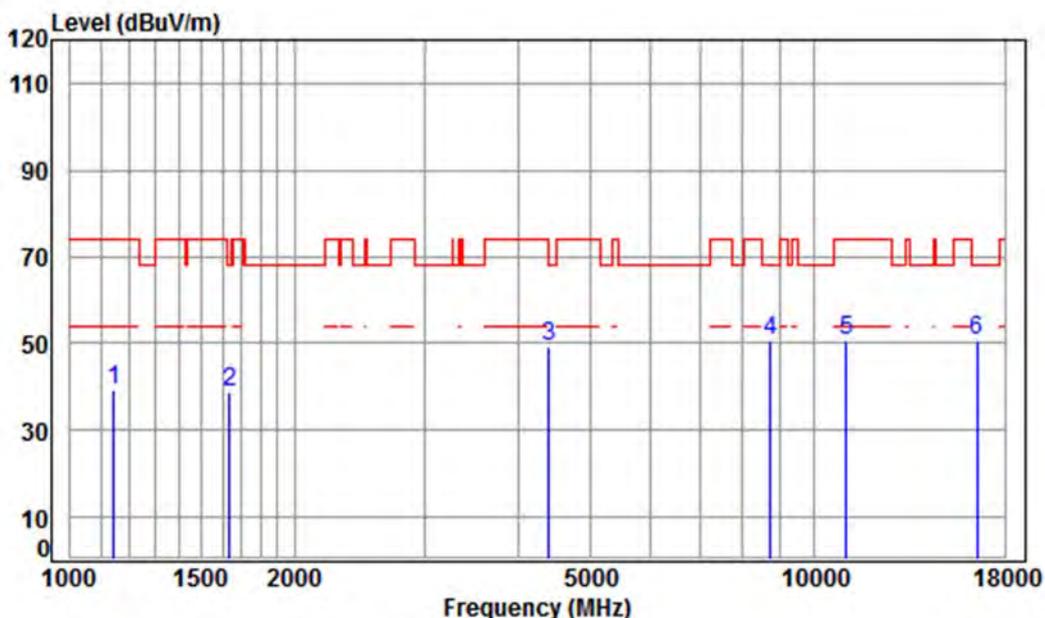

Condition: 3m VERTICAL

Job No : 0217RG

Mode : 5510 TX RSE

: Ant 2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.32	39.02	74.00	-34.98	peak
2	1639.274	5.30	26.42	38.70	45.77	38.79	68.20	-29.41	peak
3	4392.376	7.44	33.60	38.14	46.17	49.07	74.00	-24.93	peak
4	8713.630	10.33	36.26	38.23	42.10	50.46	68.20	-17.74	peak
5	11020.000	11.65	37.72	36.41	37.59	50.55	74.00	-23.45	peak
6	pp16530.000	14.63	42.71	38.02	31.20	50.52	68.20	-17.68	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 239 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5510	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

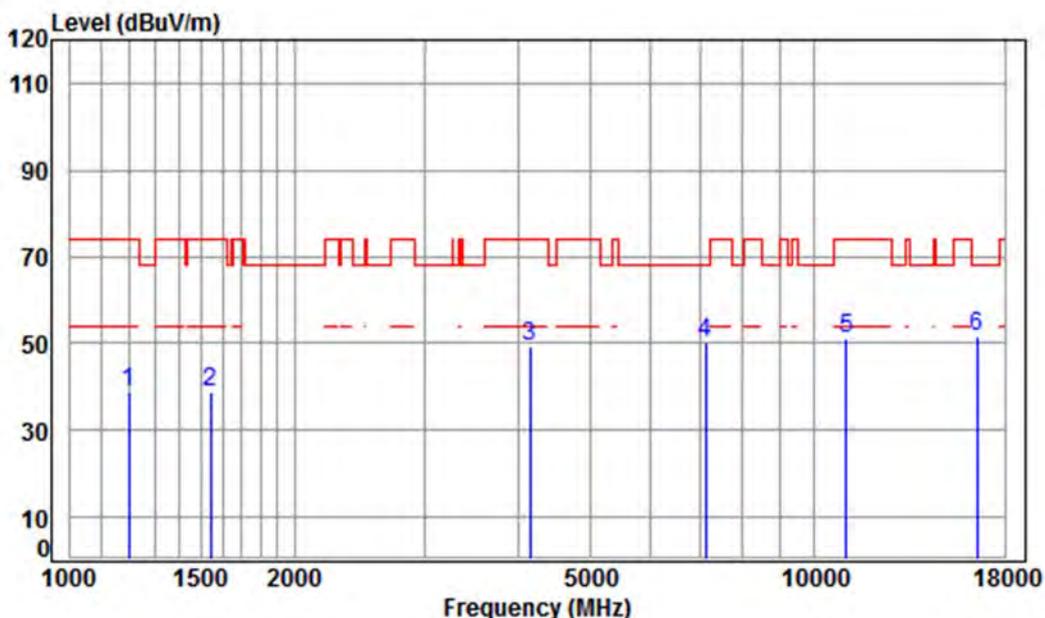

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5510 TX RSE

: Ant 2 5G WIFI 11AC(40) CH102

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	38.70	48.58	38.78	74.00	-35.22	peak
2	1542.733	5.42	26.00	38.70	46.15	38.87	74.00	-35.13	peak
3	4145.664	7.16	33.60	38.12	46.49	49.13	74.00	-24.87	peak
4	7138.144	10.09	36.44	38.21	41.96	50.28	68.20	-17.92	peak
5	11020.000	11.65	37.72	36.41	38.01	50.97	74.00	-23.03	peak
6	pp16530.000	14.63	42.71	38.02	32.45	51.77	68.20	-16.43	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5550	Peak	Vertical
------------	----------------	-----------------	------	------	----------

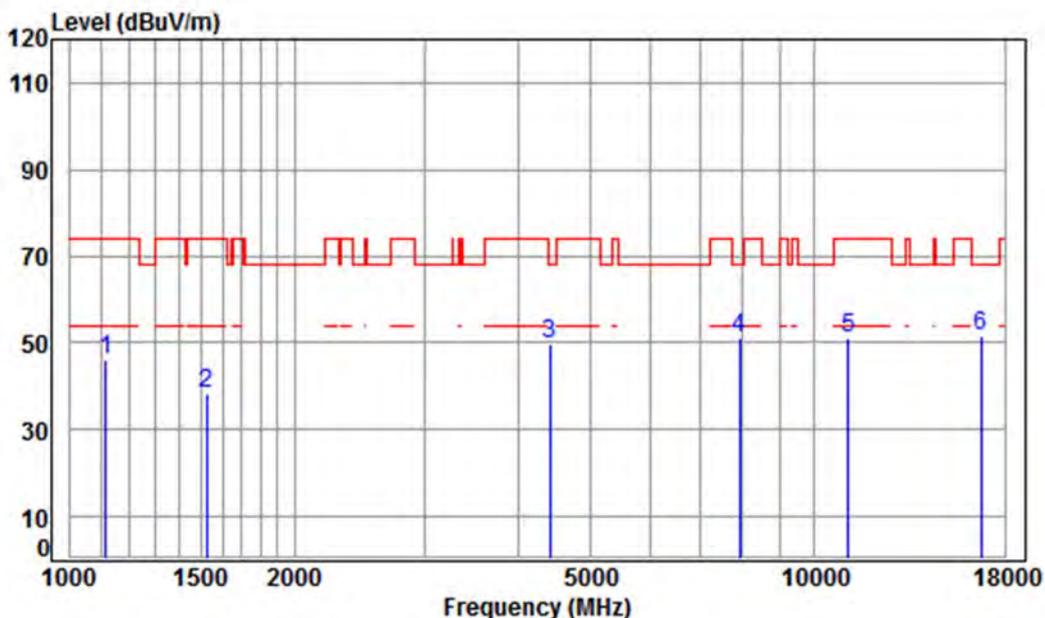

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5550 TX RSE

: Ant 2 5G WIFI 11AC(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1116.093	4.07	24.05	38.70	56.62	46.04	74.00	-27.96	peak
2	1525.000	5.45	25.91	38.70	45.51	38.17	74.00	-35.83	peak
3	4405.090	7.46	33.60	38.14	46.74	49.66	68.20	-18.54	peak
4	7920.911	9.96	36.55	38.29	43.02	51.24	68.20	-16.96	peak
5	11100.000	11.73	37.78	36.43	37.98	51.06	74.00	-22.94	peak
6	pp16740.000	15.57	42.75	38.10	31.36	51.58	68.20	-16.62	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5550	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

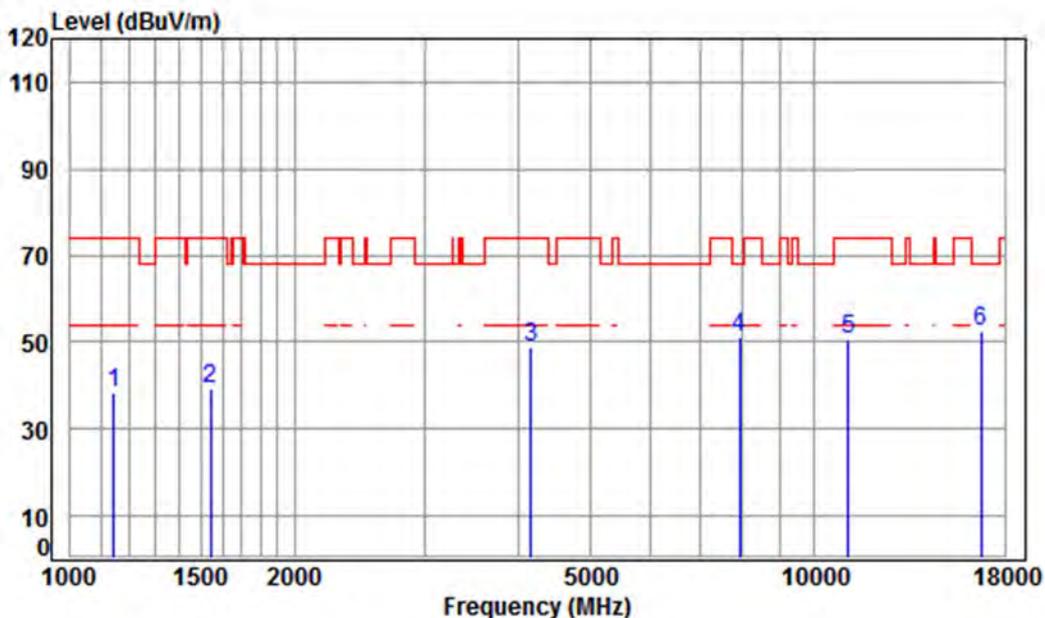

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5550 TX RSE

: Ant 2 5G WIFI 11AC(40) CH110

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1145.507	4.20	24.20	38.70	48.48	38.18	74.00	-35.82 peak
2	1542.733	5.42	26.00	38.70	46.69	39.41	74.00	-34.59 peak
3	4157.664	7.17	33.60	38.12	46.09	48.74	74.00	-25.26 peak
4	7920.911	9.96	36.55	38.29	42.72	50.94	68.20	-17.26 peak
5	11100.000	11.73	37.78	36.43	37.70	50.78	74.00	-23.22 peak
6	pp16740.000	15.57	42.75	38.10	32.28	52.50	68.20	-15.70 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 242 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Vertical
------------	----------------	-----------------	------	------	----------

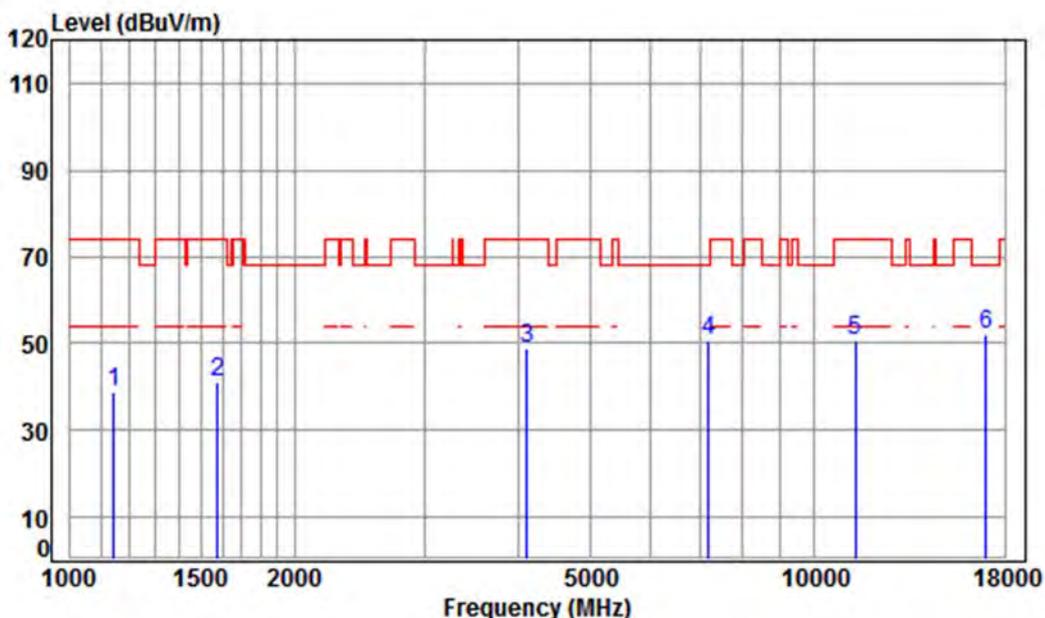

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5670 TX RSE

: Ant 2 5G WIFI 11AC(40) CH134

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	49.27	38.97	74.00	-35.03 peak
2	1578.822	5.38	26.16	38.70	48.33	41.17	74.00	-32.83 peak
3	4109.872	7.11	33.60	38.11	46.03	48.63	74.00	-25.37 peak
4	7200.309	10.08	36.42	38.22	42.43	50.71	68.20	-17.49 peak
5	11340.000	11.98	37.97	36.50	37.06	50.51	74.00	-23.49 peak
6	pp17010.000	16.69	42.81	38.20	30.90	52.20	68.20	-16.00 peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5670	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

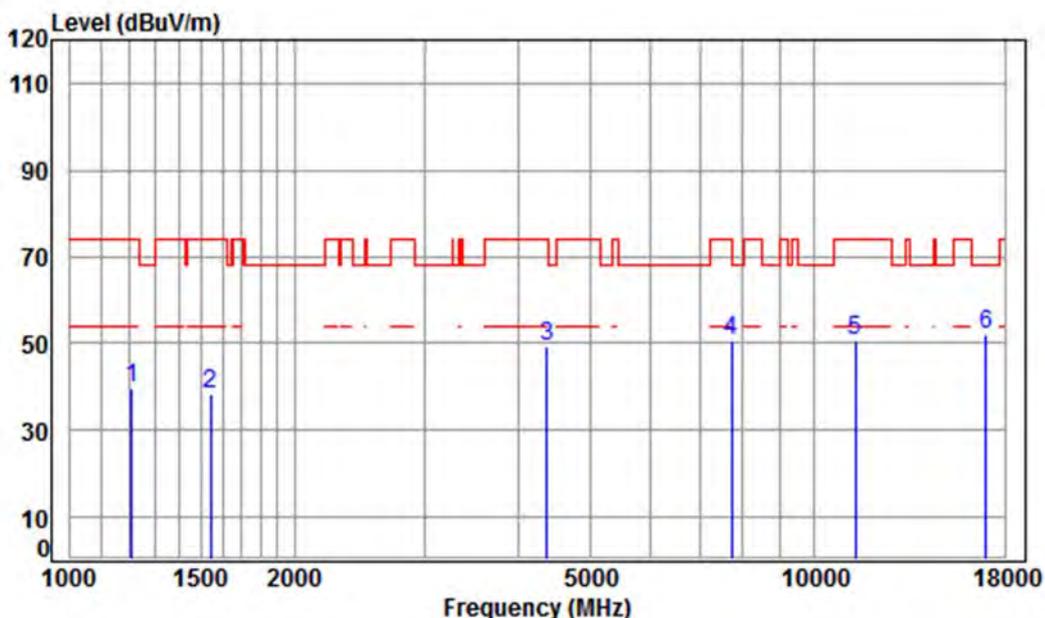

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5670 TX RSE

: Ant 2 5G WIFI 11AC(40) CH134

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	49.28	39.57	74.00	-34.43	peak
2	1542.733	5.42	26.00	38.70	45.61	38.33	74.00	-35.67	peak
3	4367.058	7.41	33.60	38.14	46.52	49.39	74.00	-24.61	peak
4	7739.857	9.98	36.45	38.28	42.59	50.74	74.00	-23.26	peak
5	11340.000	11.98	37.97	36.50	37.30	50.75	74.00	-23.25	peak
6	pp17010.000	16.69	42.81	38.20	30.81	52.11	68.20	-16.09	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 244 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Vertical
------------	----------------	-----------------	------	------	----------

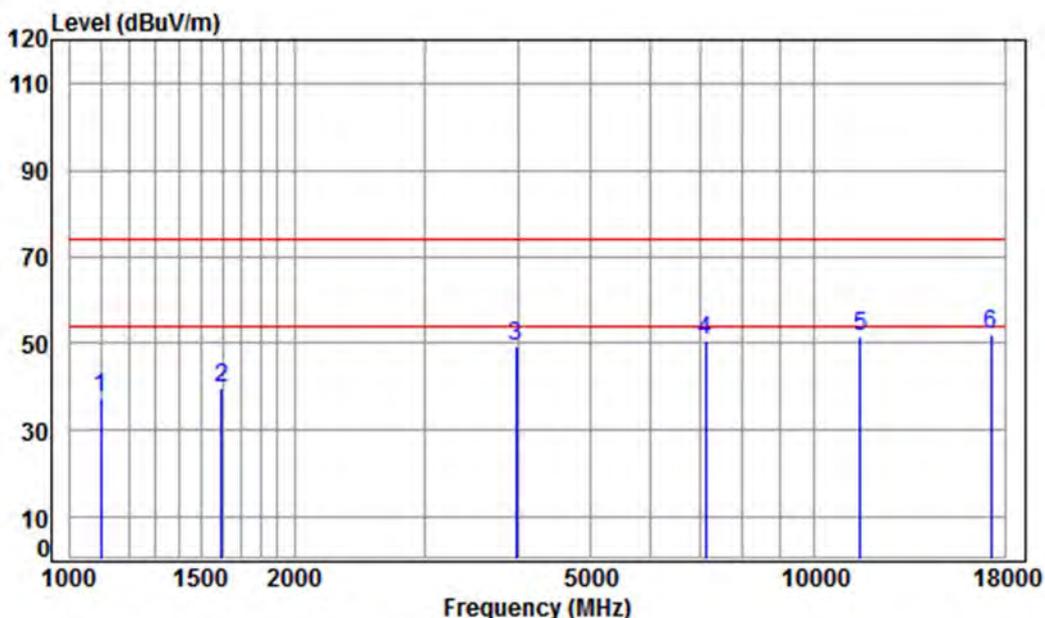

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5755 TX RSE

: Ant 2 5G WIFI 11AC(40) CH151

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1100.079	4.00	23.96	38.70	48.18	74.00	-25.82	peak
2	1597.181	5.35	26.24	38.70	46.95	74.00	-27.05	peak
3	3969.767	6.95	33.52	38.09	46.80	74.00	-27.20	peak
4	7138.144	10.09	36.44	38.21	42.33	74.00	-31.67	peak
5	11510.000	12.14	38.11	36.56	37.88	74.00	-36.12	peak
6	pp17265.000	16.12	43.12	38.12	30.98	74.00	-43.02	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5755	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

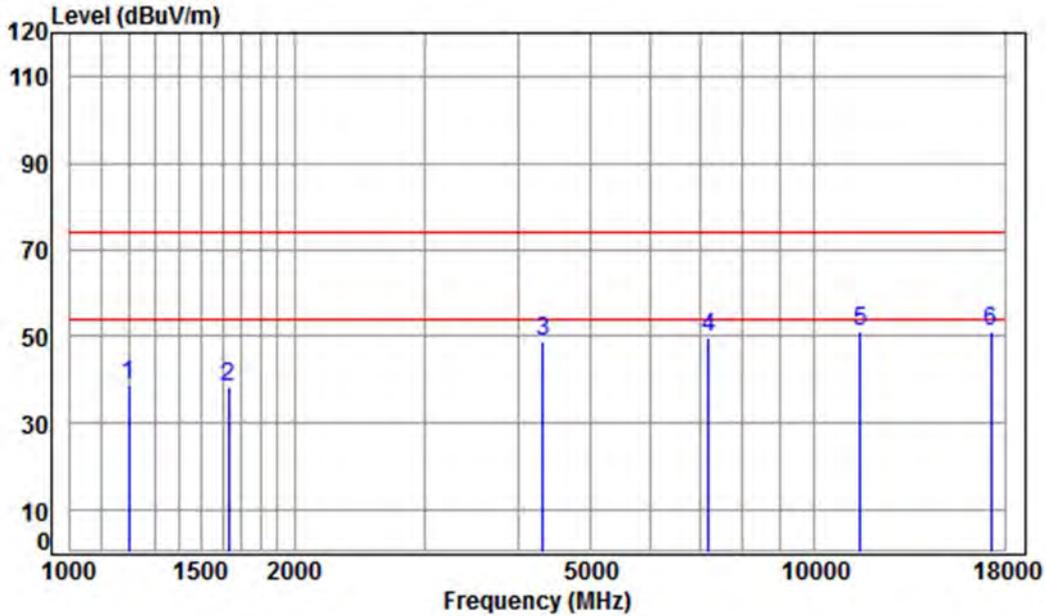

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5755 TX RSE

: Ant 2 5G WIFI 11AC(40) CH151

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1199.726	4.42	24.48	38.70	48.70	38.90	74.00	-35.10	peak
2	1629.825	5.31	26.38	38.70	45.22	38.21	74.00	-35.79	peak
3	4316.859	7.36	33.60	38.13	46.13	48.96	74.00	-25.04	peak
4	7200.309	10.08	36.42	38.22	41.61	49.89	74.00	-24.11	peak
5	pp11510.000	12.14	38.11	36.56	37.52	51.21	74.00	-22.79	peak
6	17265.000	16.12	43.12	38.12	30.08	51.20	74.00	-22.80	peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM180100021702

Page: 246 of 817

Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Vertical
------------	----------------	-----------------	------	------	----------

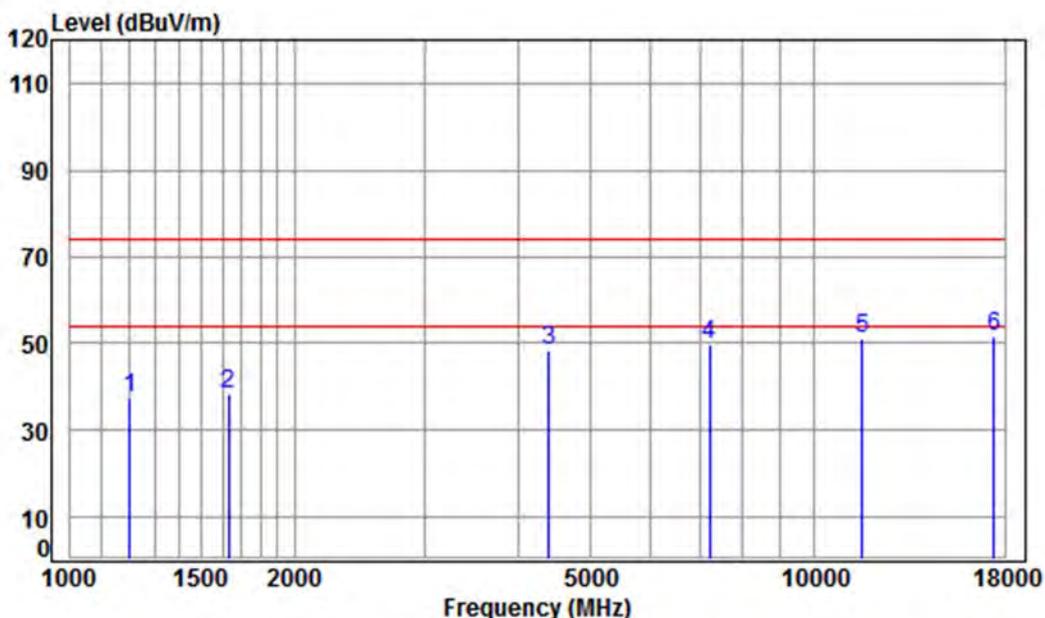

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5795 TX RSE

: Ant 2 5G WIFI 11AC(40) CH159

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB	
1	1203.199	4.43	24.49	38.70	47.42	74.00	-36.36	peak
2	1629.825	5.31	26.38	38.70	45.19	74.00	-35.82	peak
3	4392.376	7.44	33.60	38.14	45.44	74.00	-25.66	peak
4	7221.150	10.07	36.41	38.22	41.54	74.00	-24.20	peak
5	11590.000	12.17	38.19	36.58	37.52	74.00	-22.70	peak
6	pp17385.000	15.85	43.26	38.08	30.45	74.00	-22.52	peak



Test mode:	802.11ac(HT40)	Frequency(MHz):	5795	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

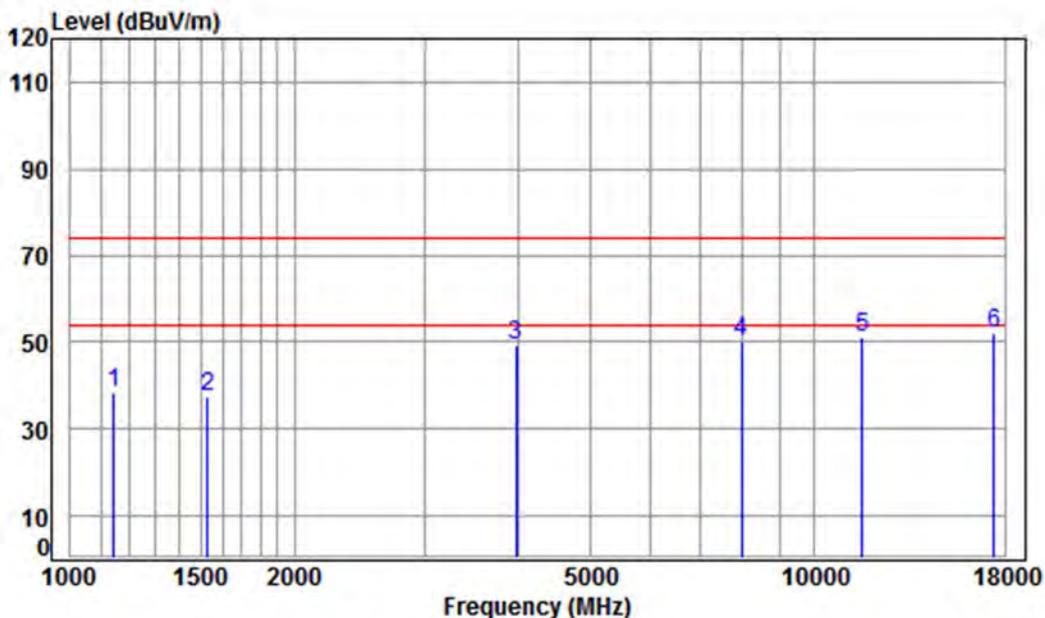

Condition: 3m HORIZONTAL

Job No : 0217RG

Mode : 5795 TX RSE

: Ant 2 5G WIFI 11AC(40) CH159


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1145.507	4.20	24.20	38.70	48.81	38.51	74.00	-35.49	peak
2	1529.414	5.44	25.94	38.70	44.82	37.50	74.00	-36.50	peak
3	3969.767	6.95	33.52	38.09	47.01	49.39	74.00	-24.61	peak
4	7966.832	9.95	36.58	38.30	42.05	50.28	74.00	-23.72	peak
5	11590.000	12.17	38.19	36.58	37.31	51.09	74.00	-22.91	peak
6	pp17385.000	15.85	43.26	38.08	30.88	51.91	74.00	-22.09	peak



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM180100021702
 Page: 248 of 817

Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Vertical
------------	----------------	-----------------	------	------	----------

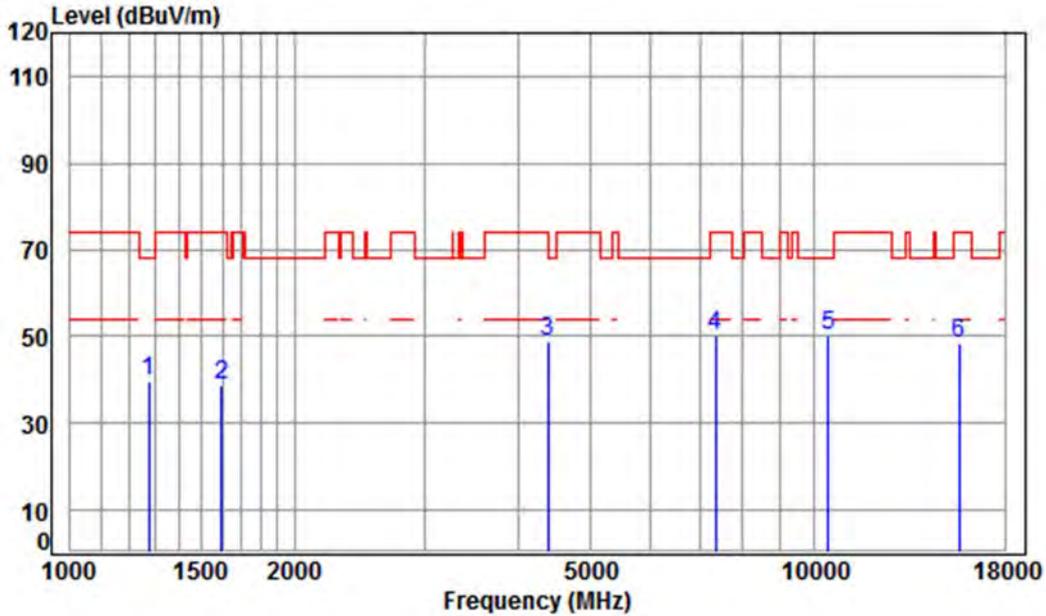

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5210 TX RSE

: Ant 2 5G WIFI 11AC(80) CH42

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1274.802	4.71	24.84	38.70	48.64	39.49	68.20	-28.71	peak
2	1597.181	5.35	26.24	38.70	45.90	38.79	74.00	-35.21	peak
3	4379.699	7.43	33.60	38.14	45.98	48.87	74.00	-25.13	peak
4	7368.741	10.03	36.35	38.24	42.24	50.38	74.00	-23.62	peak
5	pp10420.000	11.24	37.18	36.34	38.30	50.38	68.20	-17.82	peak
6	15630.000	14.44	41.35	38.05	30.71	48.45	74.00	-25.55	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5210	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

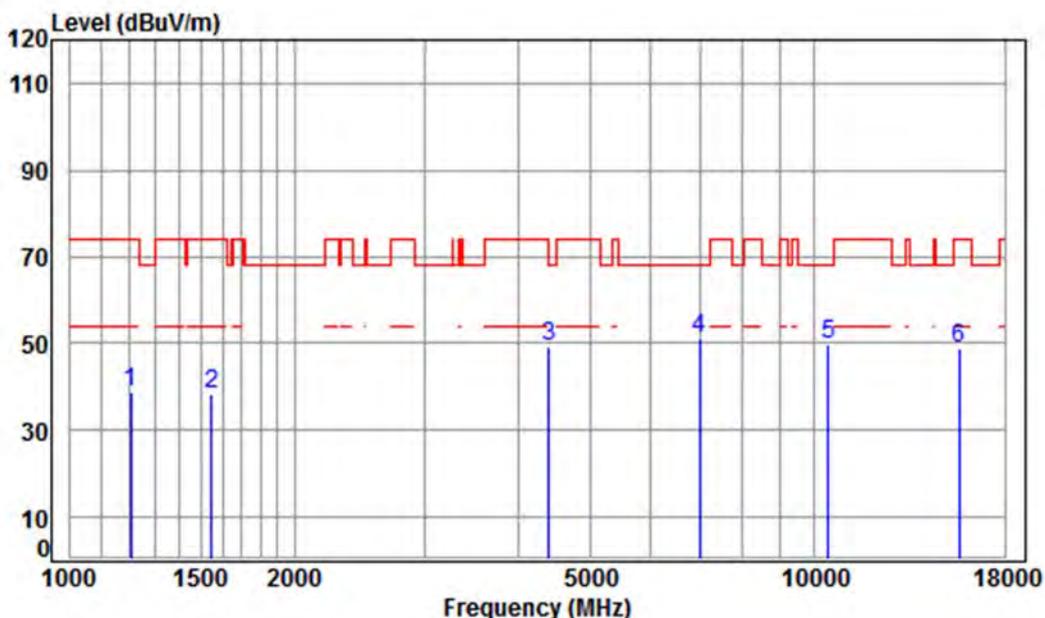

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5210 TX RSE

: Ant 2 5G WIFI 11AC(80) CH42

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Line	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1206.682	4.44	24.51	38.70	48.68	38.93	74.00	-35.07 peak
2	1547.199	5.42	26.02	38.70	45.68	38.42	74.00	-35.58 peak
3	4392.376	7.44	33.60	38.14	46.32	49.22	74.00	-24.78 peak
4 pp	7015.420	10.13	36.49	38.20	42.52	50.94	68.20	-17.26 peak
5	10420.000	11.24	37.18	36.34	37.48	49.56	68.20	-18.64 peak
6	15630.000	14.44	41.35	38.05	30.95	48.69	74.00	-25.31 peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Vertical
------------	----------------	-----------------	------	------	----------

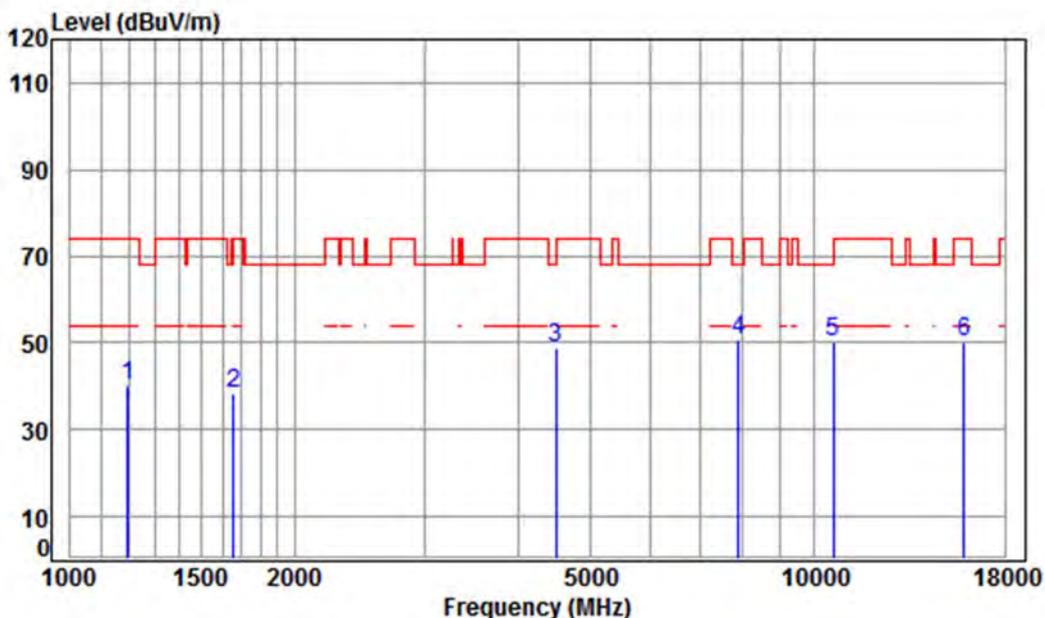

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5290 TX RSE

: Ant 2 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1196.264	4.40	24.46	38.70	49.87	40.03	74.00	-33.97	peak
2	1658.337	5.28	26.50	38.70	45.26	38.34	68.20	-29.86	peak
3	4495.125	7.55	33.60	38.15	45.81	48.81	68.20	-19.39	peak
4 pp	7898.049	9.96	36.54	38.29	42.23	50.44	68.20	-17.76	peak
5	10580.000	11.35	37.20	36.36	38.18	50.37	68.20	-17.83	peak
6	15870.000	14.80	41.25	37.89	32.08	50.24	74.00	-23.76	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5290	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

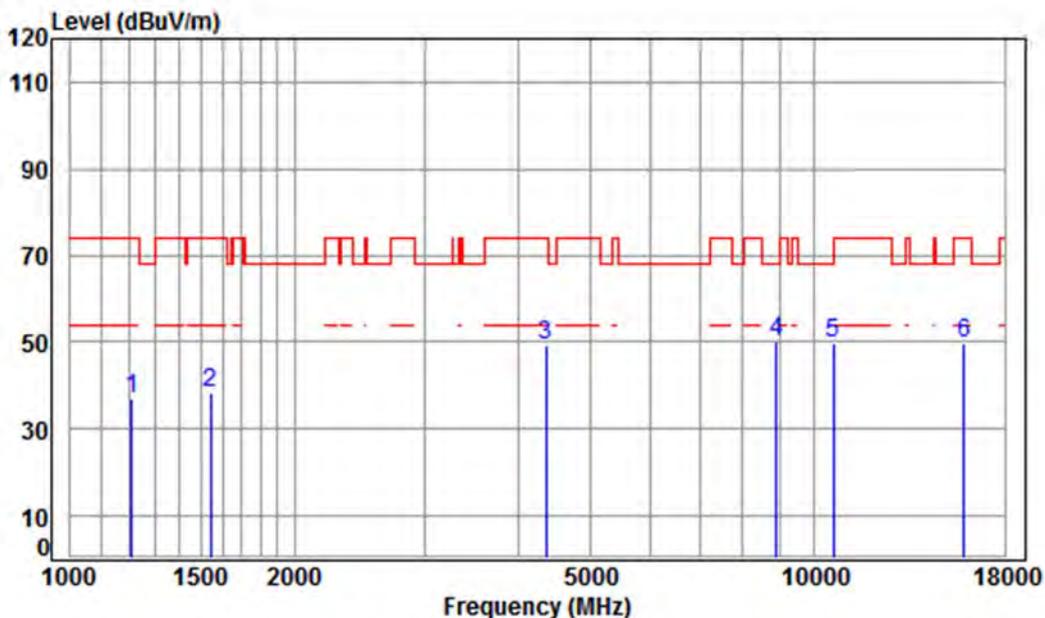

Condition: 3m HORIZONTAL

Job No : 0217RG


Mode : 5290 TX RSE

: Ant 2 5G WIFI 11AC(80) CH58

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1210.174	4.46	24.53	38.70	46.86	37.15	74.00	-36.85	peak
2	1542.733	5.42	26.00	38.70	45.74	38.46	74.00	-35.54	peak
3	4354.454	7.40	33.60	38.14	46.23	49.09	74.00	-24.91	peak
4 pp	8891.725	10.37	36.47	38.21	41.52	50.15	68.20	-18.05	peak
5	10580.000	11.35	37.20	36.36	37.70	49.89	68.20	-18.31	peak
6	15870.000	14.80	41.25	37.89	31.78	49.94	74.00	-24.06	peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Vertical
------------	----------------	-----------------	------	------	----------

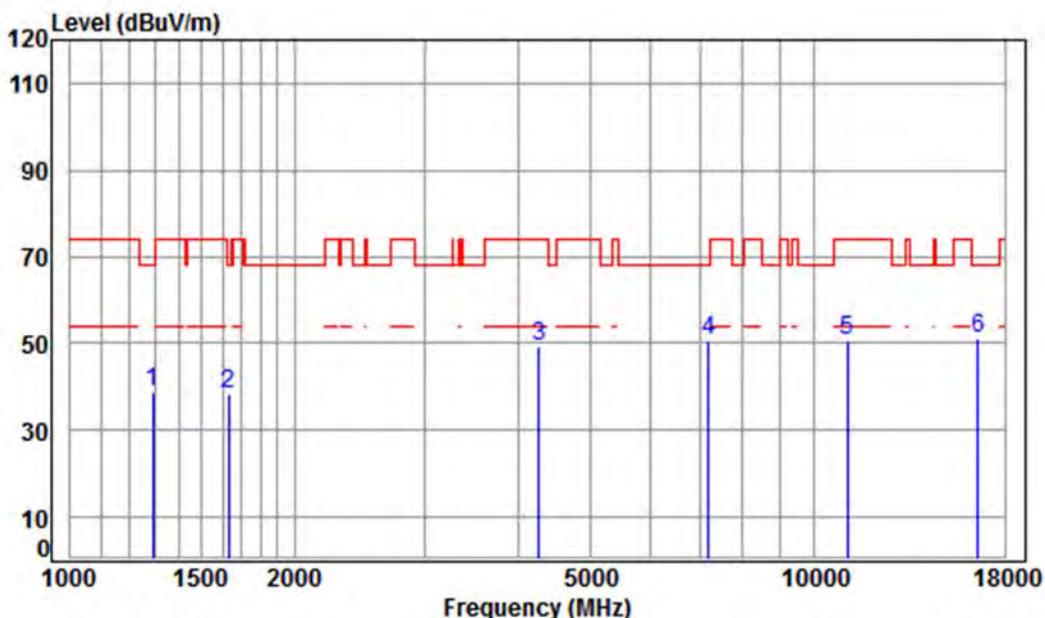

Condition: 3m VERTICAL

Job No : 0217RG


Mode : 5530 TX RSE

: Ant 2 5G WIFI 11AC(80) CH106

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	1289.627	4.76	24.91	38.70	47.95	38.92	68.20	-29.28 peak
2	1629.825	5.31	26.38	38.70	45.19	38.18	68.20	-30.02 peak
3	4267.237	7.30	33.60	38.13	46.30	49.07	74.00	-24.93 peak
4	7200.309	10.08	36.42	38.22	42.45	50.73	68.20	-17.47 peak
5	11060.000	11.69	37.75	36.42	37.71	50.73	74.00	-23.27 peak
6	pp16590.000	14.90	42.72	38.04	31.47	51.05	68.20	-17.15 peak



Test mode:	802.11ac(HT80)	Frequency(MHz):	5530	Peak	Horizontal
------------	----------------	-----------------	------	------	------------

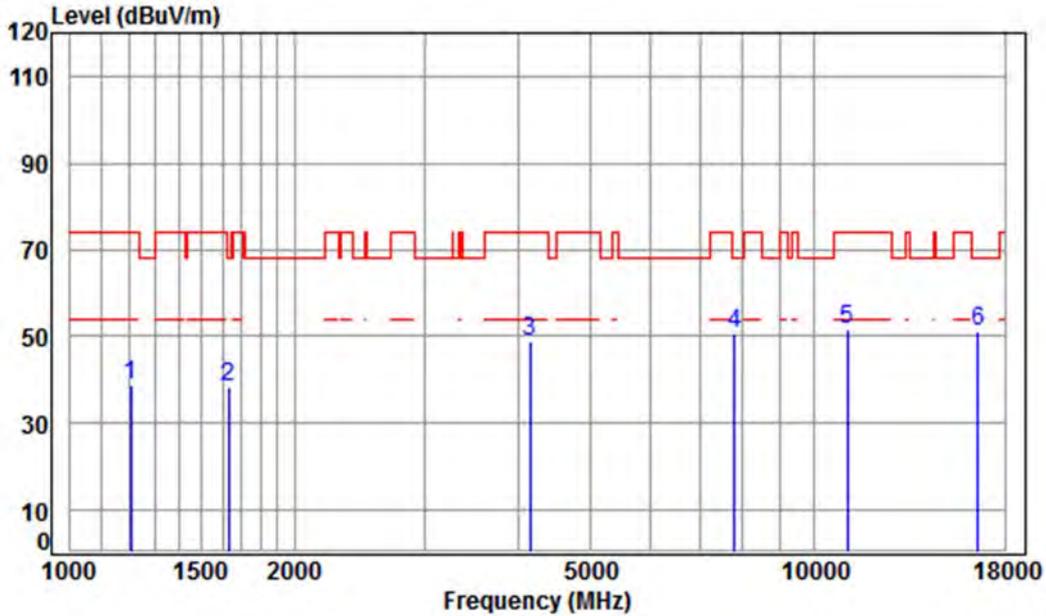

Condition: 3m HORIZONTAL
Job No : 0217RG
Mode : 5530 TX RSE
: Ant 2 5G WIFI 11AC(80) CH106

	Freq	Cable Loss	Ant Factor	Preamplifier	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	1206.682	4.44	24.51	38.70	48.44	38.69	74.00	-35.31	peak
2	1629.825	5.31	26.38	38.70	45.25	38.24	68.20	-29.96	peak
3	4145.664	7.16	33.60	38.12	46.39	49.03	74.00	-24.97	peak
4	7807.262	9.97	36.49	38.28	42.37	50.55	68.20	-17.65	peak
5	11060.000	11.69	37.75	36.42	38.44	51.46	74.00	-22.54	peak
6	pp16590.000	14.90	42.72	38.04	31.31	50.89	68.20	-17.31	peak