



FCC SAR TEST REPORT

Report No: E5/2018/20038
Applicant: Huawei Technologies Co., Ltd.
Manufacturer: Huawei Technologies Co., Ltd.
Factory: Huawei Technologies Co., Ltd.
Product Name: Smart Phone
Model No.(EUT): CLT-L29
Trade Mark: HUAWEI
FCC ID: QISCLT-L29
Standards: FCC 47CFR §2.1093
Date of Receipt: 2018-02-20
Date of Test: 2018-02-22 to 2018-02-26
Date of Issue: 2018-02-28
Test conclusion: **PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan Electronic & Communication Laboratory or testing done by SGS Taiwan Electronic & Communication Laboratory in connection with distribution or use of the product described in this report must be approved by SGS Taiwan Electronic & Communication Laboratory in writing.

Signed on behalf of SGS

Sr. Engineer

Asst. Manager

Matt Kuo

John Yeh

Date: Feb.28 , 2018

Date: Feb.28 , 2018

REVISION HISTORY

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2018-02-28		Original

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)			
	Head	Body-worn	Hotspot	Limbs
GSM850	0.79	0.61	0.91	NA
GSM1900	0.60	0.40	0.84	3.17
WCDMA Band II	0.95	0.51	0.71	3.47
WCDMA Band IV	0.78	0.50	0.60	2.68
WCDMA Band V	0.57	0.50	0.73	NA
LTE Band 2	0.65	0.48	0.64	2.96
LTE Band 4	0.69	0.60	0.55	2.82
LTE Band 5	0.80	0.45	0.63	NA
LTE Band 7	0.53	0.43	0.72	1.90
LTE Band 12	1.03	0.31	0.43	NA
LTE Band 17	0.99	0.29	0.43	NA
LTE Band 26	0.66	0.45	0.66	NA
LTE Band 38	0.54	0.26	0.81	NA
LTE Band 41	0.85	0.29	0.45	NA
WI-FI (2.4GHz)	0.80	0.18	0.64	NA
WI-FI (5GHz)	0.56	0.21	0.71	1.43
Bluetooth	0.08	0.01	0.04	NA
SAR Limited(W/kg)	1.6			4
Maximum Simultaneous Transmission SAR (W/kg)				
Scenario	Head	Body-worn	Hotspot	Limbs
Sum SAR	1.58	0.93	1.42	3.47
SPLSR	NA	NA	NA	NA
SPLSR Limited	0.04			0.1

CONTENTS

1	GENERAL INFORMATION	7
1.1	DETAILS OF CLIENT	7
1.2	TEST LOCATION	7
1.3	GENERAL DESCRIPTION OF EUT.....	8
1.3.1	<i>DUT Antenna Locations.....</i>	12
1.3.2	<i>Dynamic antenna switching specification.....</i>	14
1.3.3	<i>Power reduction specification.....</i>	15
1.3.4	<i>Downlink LTE CA additional specification.....</i>	17
1.4	TEST SPECIFICATION	26
1.5	RF EXPOSURE LIMITS.....	27
2	LABORATORY ENVIRONMENT	28
3	SAR MEASUREMENTS SYSTEM CONFIGURATION.....	29
3.1	THE SAR MEASUREMENT SYSTEM	29
3.2	ISOTROPIC E-FIELD PROBE EX3DV4	30
3.3	DATA ACQUISITION ELECTRONICS (DAE)	31
3.4	SAM TWIN PHANTOM	31
3.5	ELI PHANTOM	32
3.6	DEVICE HOLDER FOR TRANSMITTERS	33
3.7	MEASUREMENT PROCEDURE	34
3.7.1	<i>Scanning procedure.....</i>	34
3.7.2	<i>Data Storage.....</i>	36
3.7.3	<i>Data Evaluation by SEMCAD.....</i>	36
4	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	38
4.1	SAR MEASUREMENT VARIABILITY	38
4.2	SAR MEASUREMENT UNCERTAINTY	39
5	DESCRIPTION OF TEST POSITION	40
5.1	HEAD EXPOSURE CONDITION	40
5.1.1	<i>SAM Phantom Shape.....</i>	40
5.1.2	<i>EUT constructions.....</i>	41

5.1.3	Definition of the "cheek" position.....	42
5.1.4	Definition of the "tilted" position.....	43
5.2	BODY EXPOSURE CONDITION	44
5.2.1	Body-worn accessory exposure conditions.....	44
5.2.2	Wireless Router exposure conditions.....	45
5.3	EXTREMITY EXPOSURE CONDITIONS	45
5.4	PROXIMITY SENSOR TRIGGERING TEST	46
5.4.1	Main antenna Proximity Sensor.....	46
6	SAR SYSTEM VERIFICATION PROCEDURE	55
6.1	TISSUE SIMULATE LIQUID	55
6.1.1	Recipes for Tissue Simulate Liquid.....	55
6.1.2	Measurement for Tissue Simulate Liquid.....	56
6.2	SAR SYSTEM CHECK	57
6.2.1	Justification for Extended SAR Dipole Calibrations.....	58
6.2.2	Summary System Check Result(s).....	59
6.2.3	Detailed System Check Results.....	59
7	TEST CONFIGURATION	60
7.1	3G SAR TEST REDUCTION PROCEDURE	60
7.2	OPERATION CONFIGURATIONS	60
7.2.1	GSM Test Configuration.....	60
7.2.2	WCDMA Test Configuration.....	61
7.2.3	WiFi Test Configuration.....	67
7.2.4	LTE Test Configuration.....	78
8	TEST RESULT	81
8.1	MEASUREMENT OF RF CONDUCTED POWER	81
8.1.1	Conducted Power of Main Antenna.....	81
8.1.2	Conducted Power of Second Antenna.....	143
8.1.3	Conducted Power of Downlink LTE CA.....	274
8.1.4	Conducted Power of WIFI and BT.....	297
8.2	STAND-ALONE SAR TEST EVALUATION	318
8.3	MEASUREMENT OF SAR DATA	319
8.3.1	SAR Result Of GSM850.....	319

8.3.2	SAR Result Of GSM1900	322
8.3.3	SAR Result Of WCDMA Band V.....	327
8.3.4	SAR Result Of WCDMA Band IV.....	330
8.3.5	SAR Result Of WCDMA Band II.....	334
8.3.6	SAR Result Of LTE Band 2	338
8.3.7	SAR Result Of LTE Band 4.....	341
8.3.8	SAR Result Of LTE Band 5.....	344
8.3.9	SAR Result Of LTE Band 7.....	348
8.3.10	SAR Result Of LTE Band 12.....	351
8.3.11	SAR Result Of LTE Band 17.....	355
8.3.12	SAR Result Of LTE Band 26.....	359
8.3.13	SAR Result Of LTE Band 38.....	363
8.3.14	SAR Result Of LTE Band 41.....	367
8.3.15	SAR Result Of 2.4GHz WIFI.....	371
8.3.16	SAR Result Of 5GHz WIFI.....	374
8.3.17	SAR Result Of Bluetooth.....	379
8.4	MULTIPLE TRANSMITTER EVALUATION	381
8.4.1	Simultaneous SAR SAR test evaluation.....	381
9	EQUIPMENT LIST.....	423
10	CALIBRATION CERTIFICATE.....	424
11	PHOTOGRAPHS.....	424
	APPENDIX A: DETAILED SYSTEM VALIDATION RESULTS.....	425
	APPENDIX B: DETAILED TEST RESULTS	425
	APPENDIX C: CALIBRATION CERTIFICATE.....	425
	APPENDIX D: PHOTOGRAPHS.....	425

1 General Information

1.1 Details of Client

Applicant:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Manufacturer:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Factory:	Huawei Technologies Co., Ltd.
Address:	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.2 Test Location

Applicant:	SGS Taiwan Ltd. Electronics & Communication Laboratory
Address:	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan
Tel	+886-2-2299-3279
Fax	+886-2-2298-0488
Internet	http://www.tw.sgs.com/

1.3 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	Smart Phone		
Model No.(EUT):	CLT-L29		
FCC ID:	QISCLT-L29		
Trade Mark:	HUAWEI		
Product Phase:	Variant unit		
SN:	WCR0117C22000125 / WCR0117C22000038 / WCR0117C22000013 / WCR0117C22000024		
Hardware Version:	HL1CLTM		
Software Version:	CLT-L29 8.1.0.72(SP9C900)		
Antenna Type:	Inner Antenna		
Device Operating Configurations :			
Modulation Mode:	GSM:GMSK, 8PSK;WCDMA: QPSK;LTE:QPSK,16QAM,64QAM WIFI: DSSS,OFDM;BT: GFSK, $\pi/4$ DQPSK,8DPSK		
Device Class:	B		
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12
HSDPA UE Category:	14	HSUPA UE Category	6
DC-HSDPA UE Category:	24		
LTE Release	13		
Power Class	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band II/IV/V)		
	3, tested with power control Max Power(LTE Band 2/4/5/7/12/17/26/38/41)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 - 849	869 - 894
	GSM1900	1850-1910	1930-1990
	WCDMA Band V	824 - 849	869 - 894
	WCDMA Band IV	1710-1755	2110-2155
	WCDMA Band II	1850-1910	1930-1990
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824 - 849	869 - 894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 12	699-716	729-746
	LTE Band 17	704-716	734-746
	LTE Band 26	814-849	859-894
	LTE Band 38	2570-2620	2570-2620
	LTE Band 41	2545-2655	2545-2655
	Bluetooth	2400-2483.5	2400-2483.5
	Wi-Fi 2.4G	2412-2462	2412-2462
	Wi-Fi 5G	5150-5350	5150-5350
5470-5850		5470-5850	
NFC	13.56	13.56	


Battery Information1#:	Model: HB436486ECW
	Rated capacity: 3900mAh
	Battery Type: Rechargeable Li-ion Battery
	Manufacturer: Sunwoda Electronic Co., LTD
Battery Information2#:	Model: HB436486ECW
	Rated capacity: 3900mAh
	Battery Type: Rechargeable Li-ion Battery
	Manufacturer: SCUD (FUJIAN) Electronics Co., Ltd
Battery Information3#:	Model: HB436486ECW
	Rated capacity: 3900mAh
	Battery Type: Rechargeable Li-ion Battery
	Manufacturer: Desay Battery Co., Ltd.
Headset Information1#:	Model: MEND1632B729000
	Manufacturer: JIANGXI LIANCHUANG HONGSHENG ELECTRONIC CO., LTD
Headset Information2#:	Model: 1331-3301-6001-TC-296
	Manufacturer: BOLUO COUNTY QUANCHENG ELECTRONIC CO., LTD
Headset Information3#:	Model: WINDY-C
	Manufacturer: Goer Tek Inc
Headset Information4#:	Model: L99EP003-CS-H
	Manufacturer: MERRY ELECTRONICS (SHENZHEN) CO., LTD.

The difference between model **CLT-L04** and model **CLT -L29** is show in the below table:

	Model	CLT-L04	CLT-L29
Licensed Frequency	LTE BAND	FCC Band: B2/B4/ B5/B7/B12/B17/B26/B38/ B41 MIMO B4/B7	FCC Band: B2/B4/ B5/B7/B12/B17/B26/B38/ B41 MIMO B3/B7
	UMTS BAND	Band II/IV/V	Band II/IV/V
	GSM	GSM 850/1900	GSM 850/1900
	IC	the same	the same
	Antenna	the same	the same
	NFC	the same	the same
Unlicensed Frequency	Bluetooth	the same	the same
	2.4G Wi-Fi	the same	the same
	IC	the same	the same
	Antenna	4*4 MIMO B4/B7 support RX and TX	4*4MIMO B3/B7 support RX and TX
Hardware	Ram / Rom	the same	the same
	Camera	the same	the same
	PCB	the same	the same
	USB Port	the same	the same
	SIM	Single	Dual
	Hardware version	the same	the same
RF	RF circuit	The PCB is same , only some capacitors, inductors are disabled and not affect FCC Band B5/ B12/B17/B26/B38/ B41, UMTS Band II/IV/V, GSM 850/1900 The capacitors, inductors is matching the difference specifications for LTE B2/4/7(include CA band)	The PCB is same , only some capacitors, inductors are disabled and not affect FCC Band B5/ B12/B17/B26/B38/ B41, UMTS Band II/IV/V, GSM 850/1900 The capacitors, inductors is matching the difference specifications for LTE B2/4/7(include CA band)

		The hardware channel of LTE B2/4/7(include CA band) is different and not affect other band	The hardware channel of LTE B2/4/7(include CA band) is different and not affect other band
Appearance	Dimension	the same	the same
	Color	different	different
Accessory	Battery	the same	the same
	External Charger	the same	the same
	USB label	the same	the same
	Earphone	the same	the same

1.3.1 DUT Antenna Locations

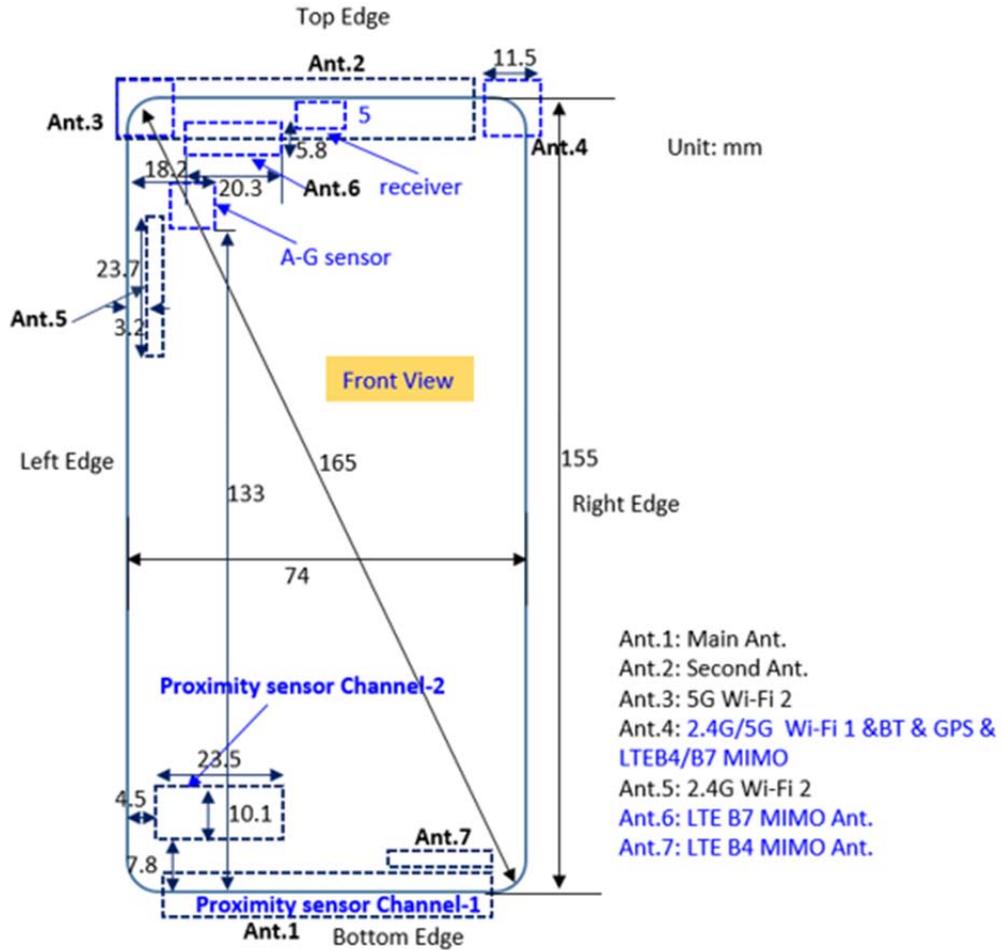

The test device is a mobile phone. The display diagonal dimension is 154mm and the overall diagonal dimension of this device is 165mm.

According to the distance between LTE/WCDMA/GSM&WIFI antennas and the sides of the EUT we can draw the conclusion that:

EUT Sides for SAR Testing						
Mode	Front	Back	Left	Right	Top	Bottom
Ant.1(Main Ant.)	Yes	Yes	Yes	Yes	No	Yes
Ant.2(Second Ant.)	Yes	Yes	Yes	Yes	Yes	No
Ant.3(5G WIFI2 Ant.)	Yes	Yes	Yes	No	Yes	No
Ant.4(2.4G WIFI1,BT&5G WIFI1 Ant.)	Yes	Yes	No	Yes	Yes	No
Ant.4(LTEB4/7 MIMO Ant.)	NA	NA	NA	NA	NA	NA
Ant.5(2.4G WIFI2 Ant.)	Yes	Yes	Yes	No	Yes	No
Ant.6(LTE B7 MIMO Ant.)	NA	NA	NA	NA	NA	NA
Ant.7(LTE B4MIMO Ant.)	NA	NA	NA	NA	NA	NA

Table 1: EUT Sides for SAR Testing

Note:

- 1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

1.3.2 Dynamic antenna switching specification

The device has two 2G/3G/4G Tx antennas (Main Antenna and Second Antenna). It can transmit from either Main Antenna or Second Antenna, but they cannot transmit simultaneously.

SAR test procedure for dynamic antenna switching is as below:

The Main Antenna and Second Antenna are set to the MAX transmit power level respectively and test the SAR respectively in all applicable RF exposure conditions. Some commands or test scripts are supplied to fix the operation state and choose the antenna so that only one TX antenna is chosen and tested at a time. All independent antennas will be completely covered by the appropriate SAR measurements and all simultaneous transmission possibilities will be fully considered to ensure SAR compliance.

1.3.3 Power reduction specification

1) This device uses the Accelerometer & Gyroscope sensor & audio receiver to indicate whether the user is making a call at Left/Right head scenario or not. The selection between Left/Right head and body power levels is based on the A-G sensor & an audio receiver detection mechanism. The audio receiver is used to determine head or body scenario. The A-G sensor is used just to determine proximity to Left or Right head scenario. The relevant power levels is set for 2G&3G&4G and Wi-Fi antennas accordingly.

Table: Summary of A-G sensor & an audio receiver detection mechanism

Receiver on (Left head scenario)	Receiver on (Right head scenario)	Receiver on (Unknown Left or right head scenario)	Receiver off (Body/other scenario)
Power Level A	Power Level B	Power Level Min(A:B)	Power Level C

Note: The power level A and B and C can be set to the same or different according to different bands.

2) This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation:

- a) A fixed level power reduction is applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
- b) A fixed level power reduction is applied for some frequency bands when simultaneously transmitting with the other antennas in certain simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction.
- c) A fixed level power reduction is applied for some frequency bands when capacitive proximity sensor mode becomes active to ensure body SAR compliance.

The following tables summarize the key power reduction information. The detailed full power which is the Max. power the state can use and reduced tune-up specifications and conducted power measurement results are provided in Section 8 of this report.

Second antenna														
Power Reduction Scenario	GSM 850	GSM1 900	UMT S B2	UMT S B4	UMT S B5	LTE B2	LTE B4	LTE B5	LTE B7	LTE B12	LTE B17	LTE B26	LTE B38	LTE B41
Receiver on (left head)	3	3	4	2.5	4	3.5	2.5	2	4	1.6	1.7	2.5	2	1.5
Receiver on (right head)	3	4	5.5	4	4	5	4.5	2.5	7.5	2	2.5	2.5	6	5.5
Receiver on(unknown)	3	4	5.5	4	4	5	4.5	2.5	7.5	2	2.5	2.5	6	5.5
Receiver off(body)	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Receiver on(left head)+WiFi on	6	6	7.5	5.5	7	6.5	5.5	5	5.5	4.6	4.7	5.5	5	4.5
Receiver on (right head)+WiFi on	6	7	9	7	7	8	7.5	5.5	9	5	5.5	5.5	9	8.5
Receiver on(unknown)+WiFi on	6	7	9	7	7	8	7.5	5.5	9	5	5.5	5.5	9	8.5
Receiver off(body)+WiFi on	3	3	3.5	3	3	3	3	3	1.5	3	3	3	3	3

Main antenna														
Power Reduction Scenario	GS M850	GSM 1900	UMTS B2	UMTS B4	UMTS B5	LTE B2	LTE B4	LTE B5	LTE B7	LTE B12	LTE B17	LTE B26	LTE B38	LTE B41
Receiver on(head)+SAR sensor off	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Receiver off+SAR Sensor on Level D5+wifi hotspot off	0	0	0.5	2	0	1.5	2	0	3	0	0	0	0.5	0
Receiver off+SAR Sensor on Level D1&D4+wifi hotspot off	0	0	0.5	2	0	1.5	2	0	1	0	0	0	0	0
Receiver off+SAR Sensor off+wifi hotspot on	0	1	5	5	0	5	5.5	0	4	0	0	0	1	2.5
Receiver off+SAR Sensor on Level D5+wifi hotspot on	0	1	5.5	7	0	6.5	7.5	0	7	0	0	0	1.5	2.5

WiFi antenna					
Power Reduction Scenario	WiFi 2.4G		WiFi 5G		
	2.4G Wifi2	2.4G Wifi1	CH	5G Wifi2	5G Wifi1
Receiver off(Body Scene)	0.0	0.0	36-165	0.0	0.0
Receiver on(Left or Right Head or Unknown L/R)	0.0	3.0	36-64	3.0	6.0
			100-165	3.0	8.0

1.3.4 Downlink LTE CA additional specification

The device supports Release 13 downlink LTE Carrier Aggregation (CA) only. All uplink communications are identical to the Release 8 Specifications.

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V13.5.0 (2016-09). The conducted power measurement results of downlink LTE CA are provided in Section 7 of this report per 3GPP TS 36.521-1 V13.3.0 (2016-09). According to KDB 941225 D05A, the downlink LTE CA SAR test is not required and PAG requirements can be excluded.

LTE CA+DL 4*4 MIMO

Model Name	CLT-L04C (FCC)
LTE Band support DL 4*4MIMO	B4/B7
Intra-band contiguous CA With DL 4*4MIMO	4*4MIMO Band
CA_7C	B7
Inter-band CA (two bands) With DL 4*4MIMO	4*4MIMO Band
CA_2A-4A	B4
CA_2A-7A	B7
CA_4A-5A	B4
CA_4A-7A	B4/B7
CA_4A-7C	B4/B7
CA_4A-12A	B4(PCC ONLY)
CA_4A-12B	B4(PCC ONLY)
CA_5A-7A	B7
CA_7A-12A	B7
Inter-band CA (Three bands) With DL 4*4MIMO	4*4MIMO Band
CA_2A-4A-5A	B4
CA_2A-4A-7A	B4/B7
CA_2A-4A-12A	B4(B2/B4 PCC ONLY)
CA_4A-7A-12A	B4/B7(B4/B7 PCC ONLY)
CA_4A-12A-12A	B4(B4 PCC ONLY)
Inter-band CA (Four bands) With DL 4*4MIMO	4*4MIMO Band
CA_2A-4A-7C	B4 or B7
CA_2A-4A-7A-12A	B4(2/4/7PCC)

Intra-band contiguous CA operating bands

E-UTRA CA Band	E-UTRA Band	Uplink (UL) operating band			Downlink (DL) operating band			Duplex Mode
		BS receive / UE transmit			BS transmit / UE receive			
		$F_{UL_low} - F_{UL_high}$			$F_{DL_low} - F_{DL_high}$			
CA_7	7	2500 MHz	-	2570 MHz	2620 MHz	-	2690 MHz	FDD

Range	CC-Combo / NRB_agg [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
		75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999
	100+100	100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9	
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680	

Note 1: Carriers in increasing frequency order.

non-contiguous intra-band CA

E-UTRA CA Band	E-UTRA Band	Uplink (UL) operating band			Downlink (DL) operating band			Duplex Mode
		BS receive / UE transmit			BS transmit / UE receive			
		$F_{UL_low} - F_{UL_high}$			$F_{DL_low} - F_{DL_high}$			
CA_4-4	4	1710 MHz	–	1785 MHz	2110 MHz	–	2155 MHz	FDD
CA_7-7	7	2500 MHz	–	2570 MHz	2620 MHz	–	2690 MHz	FDD
CA_12-12	12	699 MHz	–	716 MHz	729 MHz	–	746 MHz	FDD

E-UTRA CA configuration / Bandwidth combination set						
E-UTRACA configuration	Component carriers in order of increasing carrier frequency				Maximum aggregated bandwidth [MHz]	Bandwidth combination set
	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_4A-4A	5, 10, 15, 20	5, 10, 15, 20			40	0
	5, 10	5, 10			20	1
CA_7A-7A	5	15			40	0
	10	10, 15				
	15	15, 20				
	20	20			40	1
	5, 10, 15, 20	5, 10, 15, 20				
	5, 10, 15, 20	5, 10				
	10, 15, 20	10, 15, 20			40	3
CA_12A-12A	5	5			10	0

Test frequencies for CA_4A-4A

Test Frequency ID	CC-Combo / N _{RB_agg} [RB]	CC1 Note1					Wgap [MHz]	CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low WGap	25+25	25	20125	1727.5	2125	2127.5	5	25	20225	1737.5	2225	2137.5
	50+50	50	20100	1725	2100	2125	5	50	20250	1740	2250	2140
	50+100	50	20095	1724.5	2095	2124.5	5	100	20255	1740.5	2255	2140.5
	100+100	100	20050	1720	2050	2120	5	100	20300	1745	2300	2145
Max WGap	25+25	25	19975	1712.5	1975	2112.5	35	25	20375	1752.5	2375	2152.5
	25+50	25	19975	1712.5	1975	2112.5	30	50	20350	1750	2350	2150
		50	20000	1715	2000	2115	30	25	20375	1752.5	2375	2152.5
	25+75	25	19975	1712.5	1975	2112.5	25	75	20325	1747.5	2325	2147.5
		75	20025	1717.5	2025	2117.5	25	25	20375	1752.5	2375	2152.5
	50+50	50	20000	1715	2000	2115	25	50	20350	1750	2350	2150
	25+100	25	19975	1712.5	1975	2112.5	20	100	20300	1745	2300	2145
		100	20050	1720	2050	2120	20	25	20375	1752.5	2375	2152.5
	50+75	50	20000	1715	2000	2115	20	75	20325	1747.5	2325	2147.5
		75	20025	1717.5	2025	2117.5	20	50	20350	1750	2350	2150
	50+100	50	20000	1715	2000	2115	15	100	20300	1745	2300	2145
		100	20050	1720	2050	2120	15	50	20350	1750	2350	2150
	75+75	75	20025	1717.5	2025	2117.5	15	75	20325	1747.5	2325	2147.5
	75+100	75	20025	1717.5	2025	2117.5	10	100	20300	1745	2300	2145
		100	20050	1720	2050	2120	10	75	20325	1747.5	2325	2147.5
	100+100	100	20050	1720	2050	2120	5	100	20300	1745	2300	2145

Note 1: Carriers in increasing frequency order.

Test frequencies for CA_7A-7A

Test Frequency ID	CC-Combo / NRB_agg [RB]	CC1 Note1					Wgap [MHz]	CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Max WGap	25+25	25	20775	2502.5	2775	2622.5	60	25	21425	2567.5	3425	2687.5
	25+50	25	20775	2502.5	2775	2622.5	55	50	21400	2565	3400	2685
		50	20800	2505	2800	2625	55	25	21425	2567.5	3425	2687.5
	25+75	25	20775	2502.5	2775	2622.5	50	75	21375	2562.5	3375	2682.5
		75	20825	2507.5	2825	2627.5	50	25	21425	2567.5	3425	2687.5
	50+50	50	20800	2505	2800	2625	50	50	21400	2565	3400	2685
	25+100	25	20775	2502.5	2775	2622.5	45	100	21350	2560	3350	2680
		100	20850	2510	2850	2630	45	25	21425	2567.5	3425	2687.5
	50+75	50	20800	2505	2800	2625	45	75	21375	2562.5	3375	2682.5
		75	20825	2507.5	2825	2627.5	45	50	21400	2565	3400	2685
	50+100	50	20800	2505	2800	2625	40	100	21350	2560	3350	2680
		100	20850	2510	2850	2630	40	50	21400	2565	3400	2685
	75+75	75	20825	2507.5	2825	2627.5	40	75	21375	2562.5	3375	2682.5
	75+100	75	20825	2507.5	2825	2627.5	35	100	21350	2560	3350	2680
100		20850	2510	2850	2630	35	75	21375	2562.5	3375	2682.5	
100+100	100	20850	2510	2850	2630	30	100	21350	2560	3350	2680	
Refsens ²	75+100	75	21025	2527.5	3025	2647.5	15	100	21350	2560	3350	2680
	100+100	100	21000	2525	3000	2645	15	100	21350	2560	3350	2680
	25+100	25	20975	2522.5	2975	2642.5	25	100	21350	2560	3350	2680
	50+100	50	21000	2525	3000	2645	20	100	21350	2560	3350	2680

Note 1: Carriers in increasing frequency order.
 Note 2: Test point derived with regard to REFSENS requirements.

Test frequencies for CA_12A-12A

Test Frequency ID	CC-Combo / NRB_agg [RB]	CC1 Note 1					Wgap [MHz]	CC2 Note 1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Max WGap	25+25	25	23035	701.5	5035	731.5	7	25	23155	713.5	5155	743.5

Note 1: Carriers in increasing frequency order.

Inter-band Downlink CA (two bands)

E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-4A	2	Yes	Yes	Yes	Yes	Yes	Yes	40	0
	4			Yes	Yes	Yes	Yes		
	2			Yes	Yes			20	1
	4			Yes	Yes				
	2			Yes	Yes	Yes	Yes	40	2
4			Yes	Yes	Yes	Yes			
CA_2A-4A-4A	2			Yes	Yes	Yes	Yes	60	0
	4	See CA_4A-4A Bandwidth Combination Set 0 in Table 5.4.2A.1-3							
CA_2A-5A	2			Yes	Yes	Yes	Yes	30	0
	5			Yes	Yes				
	2			Yes	Yes			20	1
	5			Yes	Yes				
CA_2A-7A	2			Yes	Yes	Yes	Yes	40	0
	7			Yes	Yes	Yes	Yes		
CA_2A-12A	2			Yes	Yes	Yes	Yes	30	0
	12			Yes	Yes				
	2			Yes	Yes	Yes	Yes	30	1
	12		Yes	Yes	Yes				
	2			Yes	Yes			20	2
12			Yes	Yes					
CA_2A-12B	2			Yes	Yes	Yes	Yes	35	0
	12	See CA_12B Bandwidth Combination Set 0 in Table 5.4.2A.1-1							
CA_2A-28A	2			Yes	Yes	Yes	Yes	40	0
	28			Yes	Yes	Yes	Yes		
CA_4A-5A	4			Yes	Yes			20	0
	5			Yes	Yes				
	4			Yes	Yes	Yes	Yes	30	1
	5			Yes	Yes				
CA_4A-7A	4			Yes	Yes			30	0
	7			Yes	Yes	Yes	Yes		
	4			Yes	Yes	Yes	Yes	40	1
	7			Yes	Yes	Yes	Yes		
CA_4A-7A-7A	4			Yes	Yes	Yes	Yes	60	0
	7	See the CA_7A-7A Bandwidth combination set 1 in Table 5.4.2A.1-3							
CA_4A-12A	4	Yes	Yes	Yes	Yes			20	0
	12			Yes	Yes				
	4	Yes	Yes	Yes	Yes	Yes	Yes	30	1
	12			Yes	Yes				
	4			Yes	Yes	Yes	Yes	30	2
	12		Yes	Yes	Yes				
	4			Yes	Yes			20	3
	12			Yes	Yes				
	4			Yes	Yes	Yes	Yes	30	4
	12			Yes	Yes				
4			Yes	Yes	Yes		20	5	
12			Yes						

CA_4A-12B	4			Yes	Yes	Yes	Yes	35	0
	12	See CA_12B Bandwidth Combination Set 0 in Table 5.4.2A.1-1							
CA_4A-28A	4			Yes	Yes	Yes	Yes	40	0
	28			Yes	Yes	Yes	Yes		
CA_5A-7A	5	Yes	Yes	Yes	Yes			30	0
	7				Yes	Yes	Yes		
	5			Yes	Yes				
CA_7A-12A	7				Yes	Yes		30	0
	12			Yes	Yes				
	7				Yes	Yes	Yes		
CA_7A-28A	7			Yes	Yes	Yes	Yes	35	0
	28			Yes	Yes	Yes			
	7			Yes	Yes	Yes	Yes		
CA_7C-28A	7	See CA_7C bandwidth combination set 2 in table 5.4.2A.1-1						60	0
	28			Yes	Yes	Yes	Yes		

Note:

- 1) For the inter-band CA combinations, Except CA_2A-12B, CA_4A-12A, CA_4A-12B, CA_4A-28A, B12/B28 cannot be PCC, other the listed bands above can be used as PCC or SCC.
- 2) The channel spacing and aggregated channel bandwidth for CA are identical to the associated specification in 3GPP TS 36.101 V13.5.0 (2016-09).
- 3) The reference test frequencies for CA refers to 3GPP TS 36.508 V13.1.0

Inter-band Downlink CA (Three bands)

E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-4A-5A	2			Yes	Yes	Yes	Yes	50	0
	4			Yes	Yes	Yes	Yes		
	5			Yes	Yes				
CA_2A-4A-7A	2			Yes	Yes	Yes	Yes	60	0
	4			Yes	Yes	Yes	Yes		
	7			Yes	Yes	Yes	Yes		
CA_2A-4A-12A	2			Yes	Yes	Yes	Yes	50	0
	4			Yes	Yes	Yes	Yes		
	12			Yes	Yes				
CA_2A-7A-12A	2			Yes	Yes	Yes	Yes	50	0
	7			Yes	Yes	Yes	Yes		
	12			Yes	Yes				
CA_4A-7A-12A	4			Yes	Yes			40	0
	7			Yes	Yes	Yes	Yes		
	12			Yes	Yes				
	4			Yes	Yes	Yes	Yes	50	1
	7			Yes	Yes	Yes	Yes		
12			Yes	Yes					

NOTE: All the listed bands above can be used as PCC or SCC except for CA_2A-4A-12A , CA_4A_7A_12A, CA_4A_12A_12A, B12 cannot be PCC.

Inter-band CA operating bands (four bands)

E-UTRA CA Band	E-UTRA Band	Uplink (UL) operating band			Downlink (DL) operating band			Duplex Mode
		BS receive / UE transmit			BS transmit / UE receive			
		F _{UL_low} – F _{UL_high}			F _{DL_low} – F _{DL_high}			
2-4-7	2	1850 MHz	–	1910 MHz	1930 MHz	–	1990 MHz	FDD
	4	1710 MHz	–	1785 MHz	2110 MHz	–	2155 MHz	
	7	2500 MHz	–	2570 MHz	2620 MHz	–	2690 MHz	
2-4-7-12	2	1850 MHz	–	1910 MHz	1930 MHz	–	1990 MHz	FDD
	4	1710 MHz	–	1785 MHz	2110 MHz	–	2155 MHz	
	7	2500 MHz	–	2570 MHz	2620 MHz	–	2690 MHz	
	12	699 MHz	–	716 MHz	729 MHz	–	746 MHz	

E-UTRA CA Configuration	E-UTRA Bands	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
CA_2A-4A-7C	2			Yes	Yes	Yes	Yes	80	0
	4			Yes	Yes	Yes	Yes		
	7	See the CA_7A-7A Bandwidth combination set 1 in Table 5.4.2A.1-3							
CA_2A-4A-7A-12A	2			Yes	Yes	Yes	Yes	70	0
	4			Yes	Yes	Yes	Yes		
	7			Yes	Yes	Yes	Yes		
	12			Yes	Yes				

1.4 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE Std C95.1 – 1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 941225 D01 3G SAR Procedures v03r01	3G SAR Measurement Procedures
KDB 941225 D05 SAR for LTE Devices v02r05	SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES
KDB 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02	Rel. 10 LTE SAR Test Guidance and KDB Inquiries
KDB 248227 D01 802.11 Wi-Fi SAR v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 941225 D06 Hotspot Mode SAR v02r01	SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities
KDB 648474 D04 Handset SAR v01r03	SAR Evaluation Considerations for Wireless Handsets
KDB447498 D01 General RF Exposure Guidance v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB447498 D03 Supplement C Cross-Reference v01	OET Bulletin 65, Supplement C Cross-Reference
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting v01r02	RF Exposure Compliance Reporting and Documentation Considerations

1.5 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 2 : The Ambient Conditions

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|)^2 / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

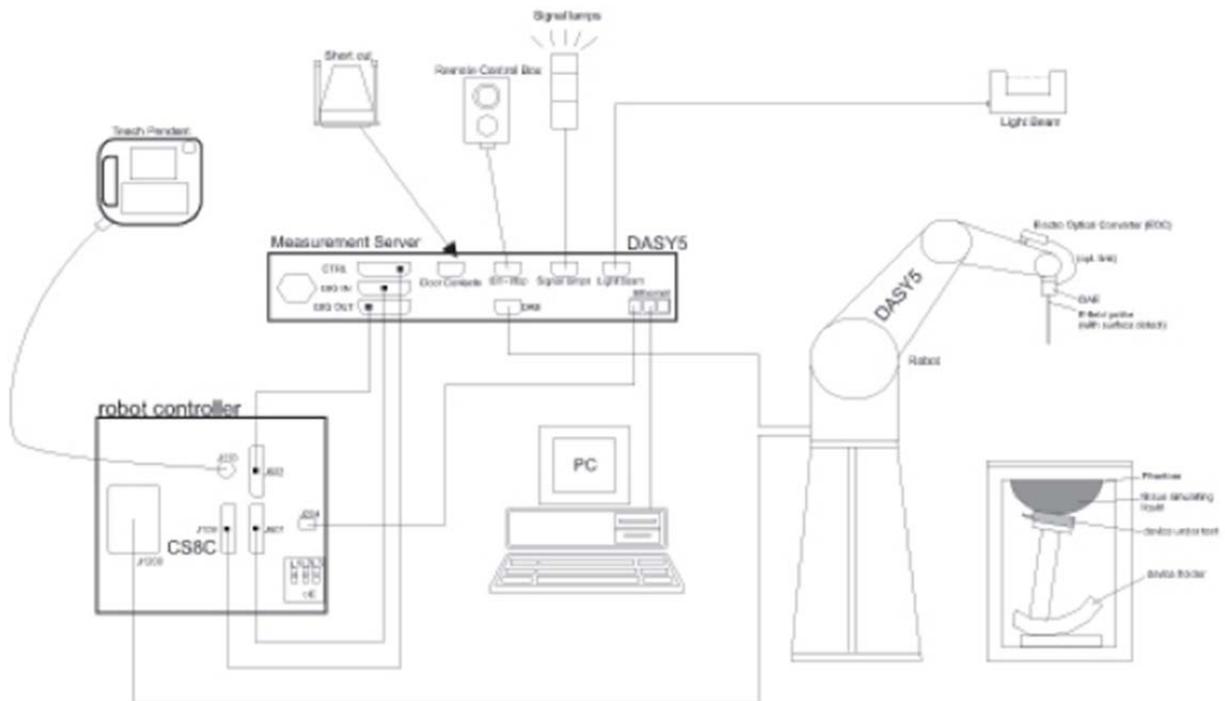


F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.


3.2 Isotropic E-field Probe EX3DV4

	<p>Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p>
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

3.3 Data Acquisition Electronics (DAE)

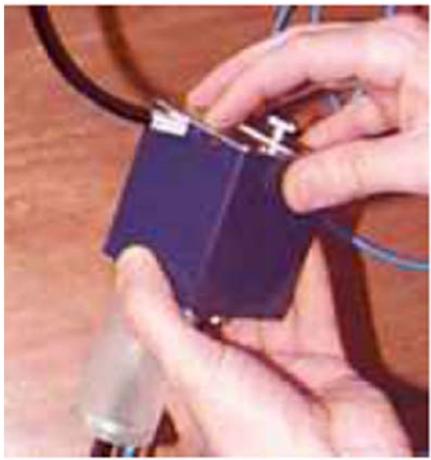Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

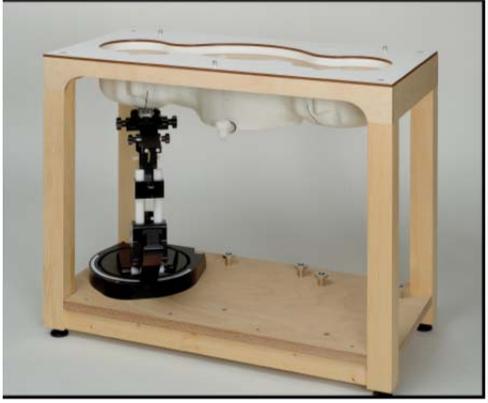Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 \pm 0.2 mm (6 \pm 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid	Compatible with all SPEAG tissue	
Compatibility	simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcpi$$

With V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcpi = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.


4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

5 Description of Test Position


5.1 Head Exposure Condition

5.1.1 SAM Phantom Shape

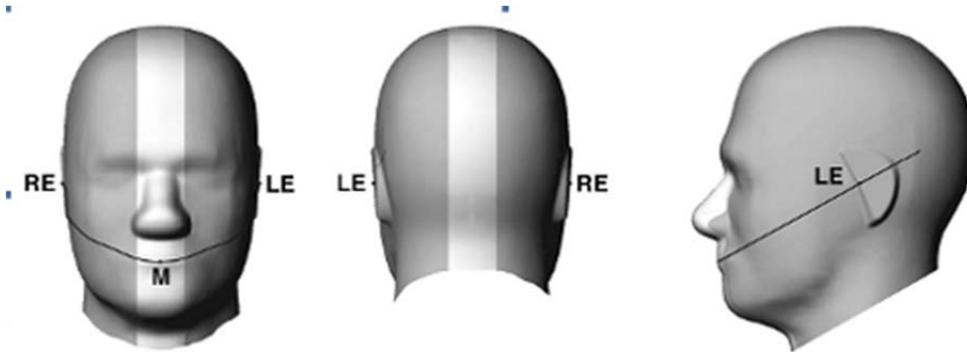


F-3. Front, back, and side views of SAM (model for the phantom shell). Full-head model is for illustration purposes only-procedures in this recommended practice are intended primarily for the phantom setup.


Note: The centre strip including the nose region has a different thickness tolerance.

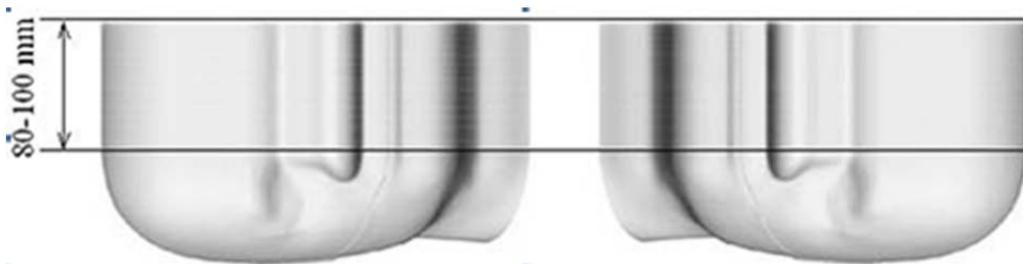

F-4. Sagittally bisected phantom with extended perimeter (shown placed on its side as used for SAR measurements)

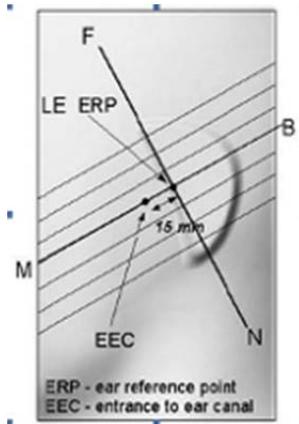


F-5. Close-up side view of phantom, showing the ear region, N-F and B-M lines, and seven cross-sectional plane locations

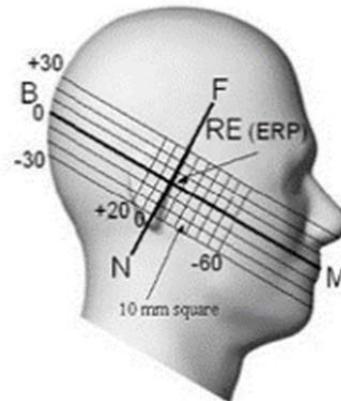


F-6. Side view of the phantom showing relevant markings and seven cross-sectional plane locations

5.1.2 EUT constructions

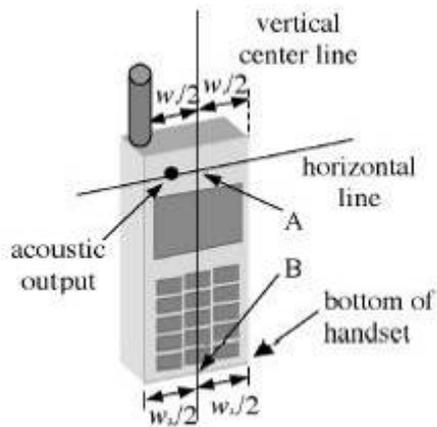

F-7. Handset vertical and horizontal reference lines—"fixed case"

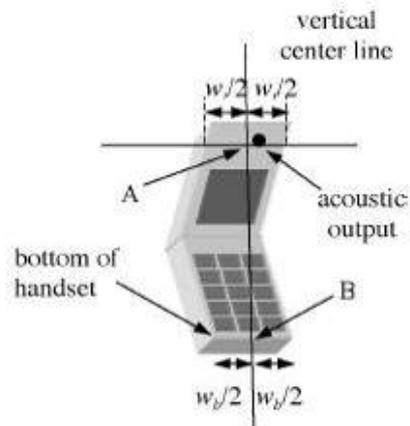

F-8. Handset vertical and horizontal reference lines—"clam-shell case"


5.1.3 Definition of the “cheek” position

a) Position the device with the vertical centre line of the body of the device and the horizontal line crossing the centre of the ear piece in a plane parallel to the sagittal plane of the phantom ("initial position"). While maintaining the device in this plane, align the vertical centre line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the centre of the ear piece with the line RE-LE.


b) Translate the mobile phone box towards the phantom with the ear piece aligned with the line LE-RE until telephone touches the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

5.1.4 Definition of the “tilted” position

- a) Position the device in the “cheek” position described above;
- b) While maintaining the device in the reference plane described above and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

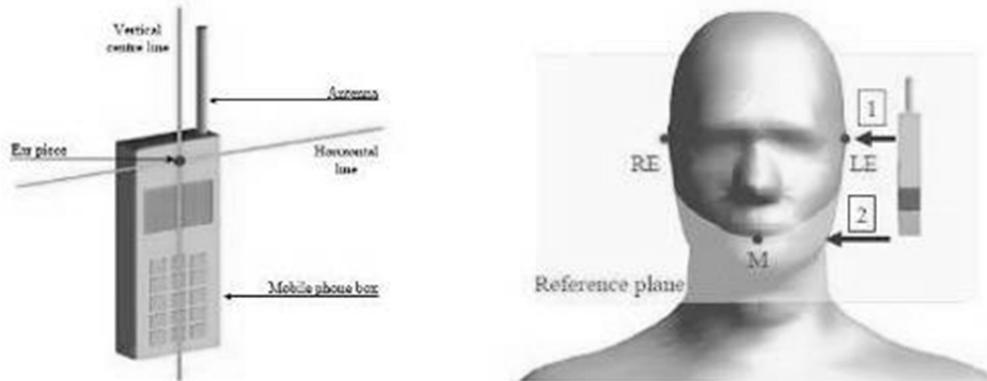

F-9. Definition of the reference lines and points, on the phone and on the phantom and initial position

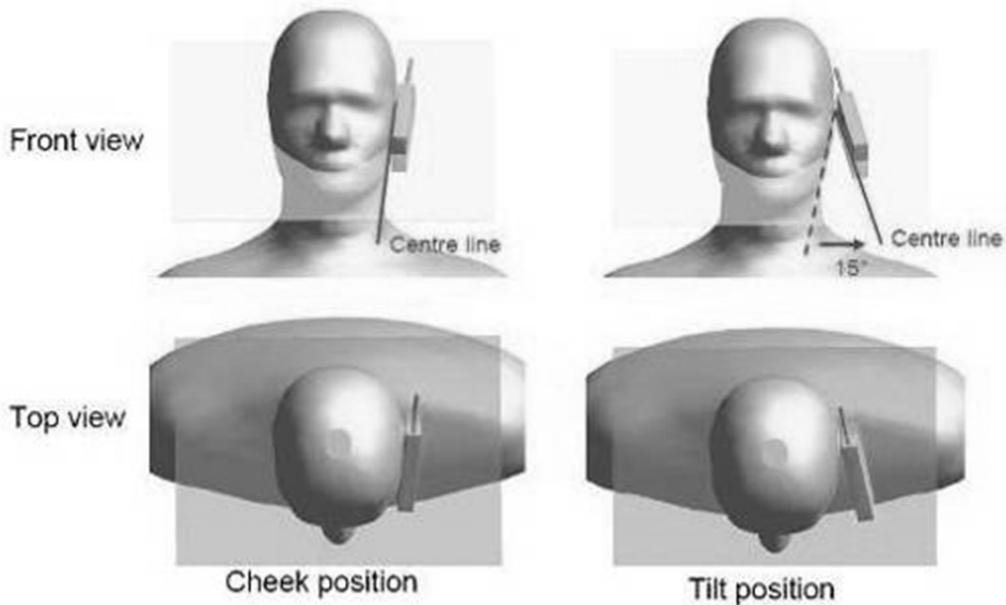

F-10. “Cheek” and “tilt” positions of the mobile phone on the left side

5.2 Body Exposure Condition


5.2.1 Body-worn accessory exposure conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations.

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration. Per FCC KDB Publication 648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

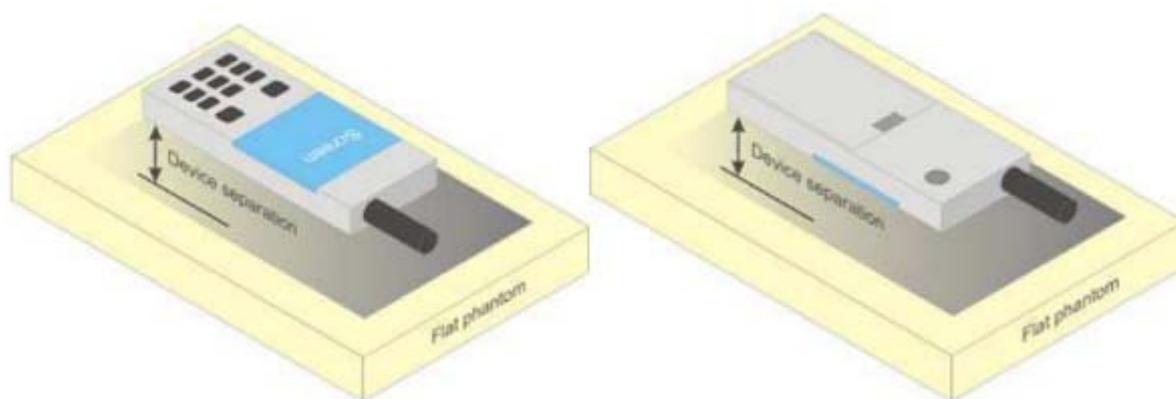

F-11. Test positions for body-worn devices

5.2.2 Wireless Router exposure conditions

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. For devices with form factors smaller than $9 \text{ cm} \times 5 \text{ cm}$, a test separation distance of 5 mm is required.

5.3 Extremity exposure conditions

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension $> 15.0 \text{ cm}$ or an overall diagonal dimension $> 16.0 \text{ cm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR $> 1.2 \text{ W/kg}$; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Due to the SAR result, only the following frequency bands need to test with 0mm for the Product Specific 10-g SAR, the others are not required.


Main Antenna Test data											
Band	Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scale factor	Scaled SAR(W/kg)	Limbs SAR Required
Product extremity condition											
GSM 1900	Bottom side	GPRS 2TS	810/1909.8	1:4.15	0.954	0.08	26.51	28	1.409	1.344	Yes
WCDMA B2	Bottom side	RMC	9538/1907.6	1:1	0.586	0.13	18.65	24.5	3.846	2.254	Yes
WCDMA B4	Bottom side	RMC	1412/1732.4	1:1	0.496	0.08	18.18	24	3.819	1.894	Yes
LTE B2	Back side	QPSK	18700/1860	1:1	0.535	0.1	18.62	24	3.451	1.847	Yes
LTE B4	Bottom side	QPSK	20175/1732.5	1:1	0.465	0.03	17.69	24	4.276	1.988	Yes
LTE B7	Bottom side	QPSK	21350/2560	1:1	0.6	0.1	18.83	23.6	2.999	1.799	Yes

5.4 Proximity Sensor Triggering Test

5.4.1 Main antenna Proximity Sensor

1) Proximity sensor triggering distances

The Proximity sensor triggering was applied to WCDMA Band 2, 4; LTE Band 2, 4,7,38 Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.

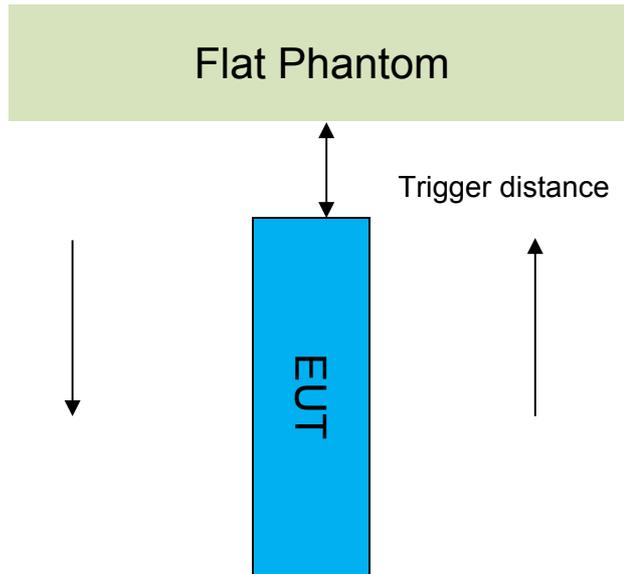

Proximity Sensor Triggering Distance(mm)			
Position	Front	Back	Bottom
Minimum	10(WCDMA B2/4, LTE B2/4/7)	10 (WCDMA B2/4, LTE B2/4/7)	10(WCDMA B2/4, LTE B2/4/7)
	4(LTE B7/38)	4(LTE B7/38)	4(LTE B7/38)
Required SAR Test	9(WCDMA B2/4, LTE B2/4/7)	9(WCDMA B2/4, LTE B2/4/7)	9(WCDMA B2/4, LTE B2/4/7)
	3(LTE B7/38)	3(LTE B7/38)	3(LTE B7/38)


Main antenna					
Band	Test position	Sensor Trigger Distance range(DUT to Phantom)	Power reduction amount(dB)	Max Power level (dBm)	Note(Also see Fig.4 flow chart above)
WCDMA B2	Bottom side	0≤distance≤10mm	0.5	23	level D1
		10<distance≤16mm	0	23.5	level D2
		16<distance	0	23.5	level D3
	Back side	0≤distance≤4mm	0.5	23	level D5
		4<distance≤10mm	0.5	23	level D4
		>10mm	0	23.5	level D3
	Front side	0≤distance≤10mm	0.5	23	level D1
		10<distance≤16mm	0	23.5	level D2
		16<distance	0	23.5	level D3
	Left side	ALL	0	23.5	level D3
	Right side	ALL	0	23.5	level D3
	Top side	ALL	0	23.5	level D3
WCDMA B4	Bottom side	0≤distance≤10mm	1	22	level D1
		10<distance≤16mm	0	23	level D2
		16<distance	0	23	level D3
	Back side	0≤distance≤4mm	1	22	level D5
		4<distance≤10mm	1	22	level D4
		>10mm	0	23	level D3
	Front side	0≤distance≤10mm	1	22	level D1
		10<distance≤16mm	0	23	level D2
		16<distance	0	23	level D3
	Left side	ALL	0	23	level D3
	Right side	ALL	0	23	level D3
	Top side	ALL	0	23	level D3
LTE B2	Bottom side	0≤distance≤10mm	0.5	22.5	level D1
		10<distance≤16mm	0	23	level D2
		16<distance	0	23	level D3
	Back side	0≤distance≤4mm	0.5	22.5	level D5
		4<distance≤10mm	0.5	22.5	level D4
		>10mm	0	23	level D3
	Front side	0≤distance≤10mm	0.5	22.5	level D1
		10<distance≤16mm	0	23	level D2
		16<distance	0	23	level D3
	Left side	ALL	0	23	level D3
	Right side	ALL	0	23	level D3
	Top side	ALL	0	23	level D3
LTE B4	Bottom side	0≤distance≤10mm	1	21.5	level D1
		10<distance≤16mm	0	22.5	level D2
		16<distance	0	22.5	level D3
	Back side	0≤distance≤4mm	1	21.5	level D5
		4<distance≤10mm	1	21.5	level D4
		>10mm	0	22.5	level D3
	Front side	0≤distance≤10mm	1	21.5	level D1
		10<distance≤16mm	0	22.5	level D2
		16<distance	0	22.5	level D3
	Left side	ALL	0	22.5	level D3
	Right side	ALL	0	22.5	level D3



	Top side	ALL	0	22.5	level D3
LTE B7	Bottom side	0≤distance≤4mm	3	19.6	level D5
		4<distance≤10mm	1	21.6	level D1
		10<distance	0	22.6	level D3
	Back side	0≤distance≤4mm	3	19.6	level D5
		4<distance≤10mm	1	21.6	level D4
		10<distance	0	22.6	level D3
	Front side	0≤distance≤4mm	3	19.6	level D5
		4<distance≤10mm	1	21.6	level D1
		10<distance	0	22.6	level D3
	Left side	ALL	0	22.6	level D3
Right side	ALL	0	22.6	level D3	
Top side	ALL	0	22.6	level D3	
LTE B38	Bottom side	0≤distance≤4mm	0.5	22.5	level D5
		4<distance≤10mm	0	23	level D1
		10<distance	0	23	level D3
	Back side	0≤distance≤4mm	0.5	22.5	level D5
		4<distance≤10mm	0	23	level D4
		10<distance	0	23	level D3
	Front side	0≤distance≤4mm	0.5	22.5	level D5
		4<distance≤10mm	0	23	level D1
		10<distance	0	23	level D3
	Left side	ALL	0	23	level D3
Right side	ALL	0	23	level D3	
Top side	ALL	0	23	level D3	

Note: SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.


Band	Ch	Measured Power(dBm)		
		Max. Power	Power back-off (0<distance≤4mm)	Power back-off (4mm<distance≤10mm)
WCDMA Band II	9400	23.74	23.24	23.24
WCDMA Band IV	1412	23.31	21.17	21.17
LTE Band 2	18900	22.99	21.79	21.79
LTE Band 4	20175	23.06	20.82	20.82
LTE Band 7	21100	22.63	22.03	19.70
LTE Band 38	38000	23.33	22.65	22.65



● DUT Moving Toward (Trigger) the Phantom

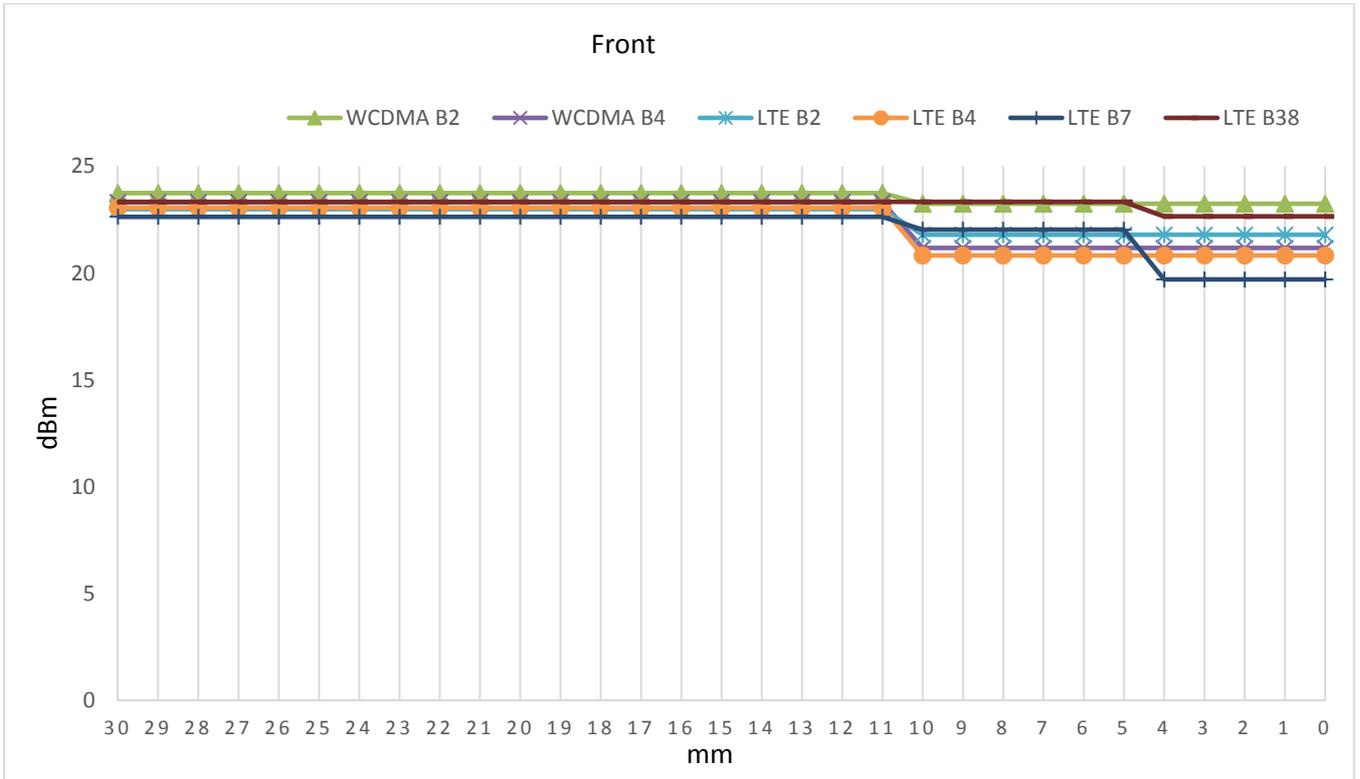

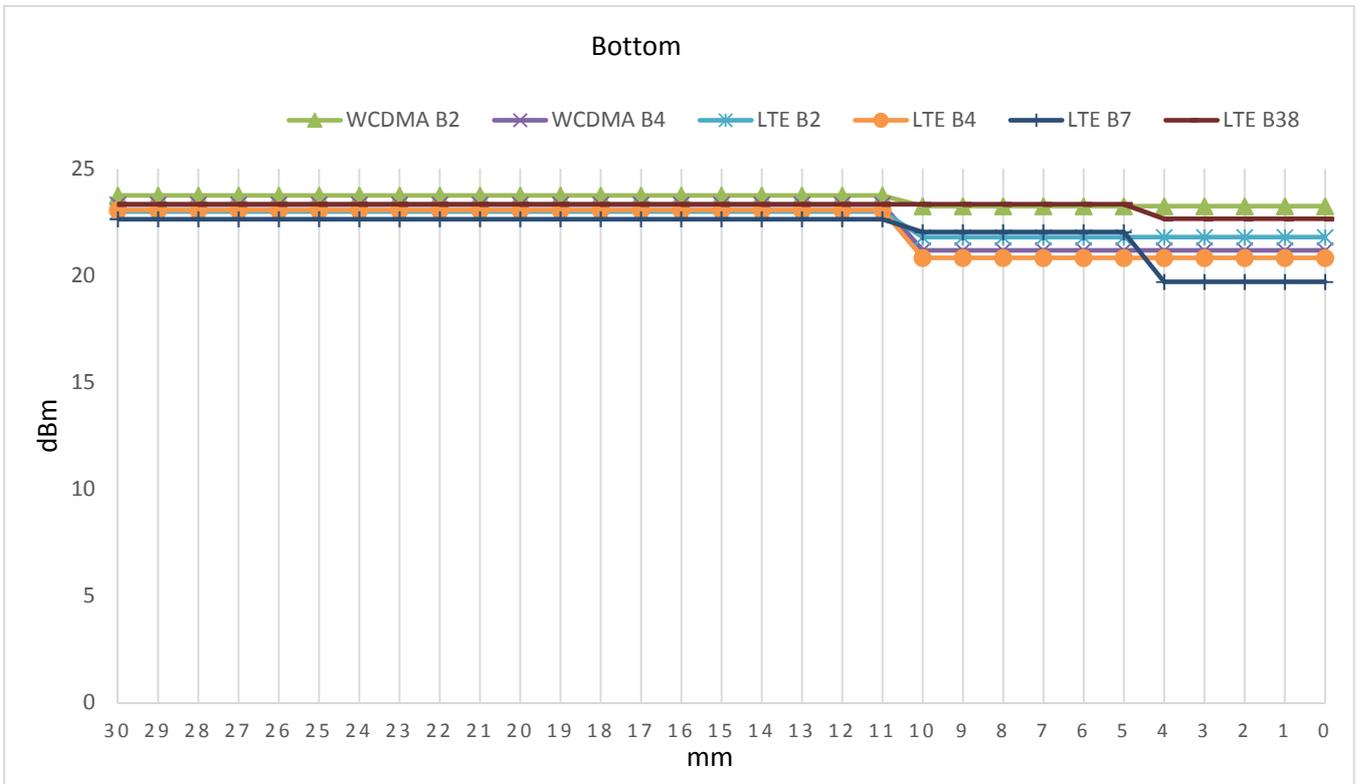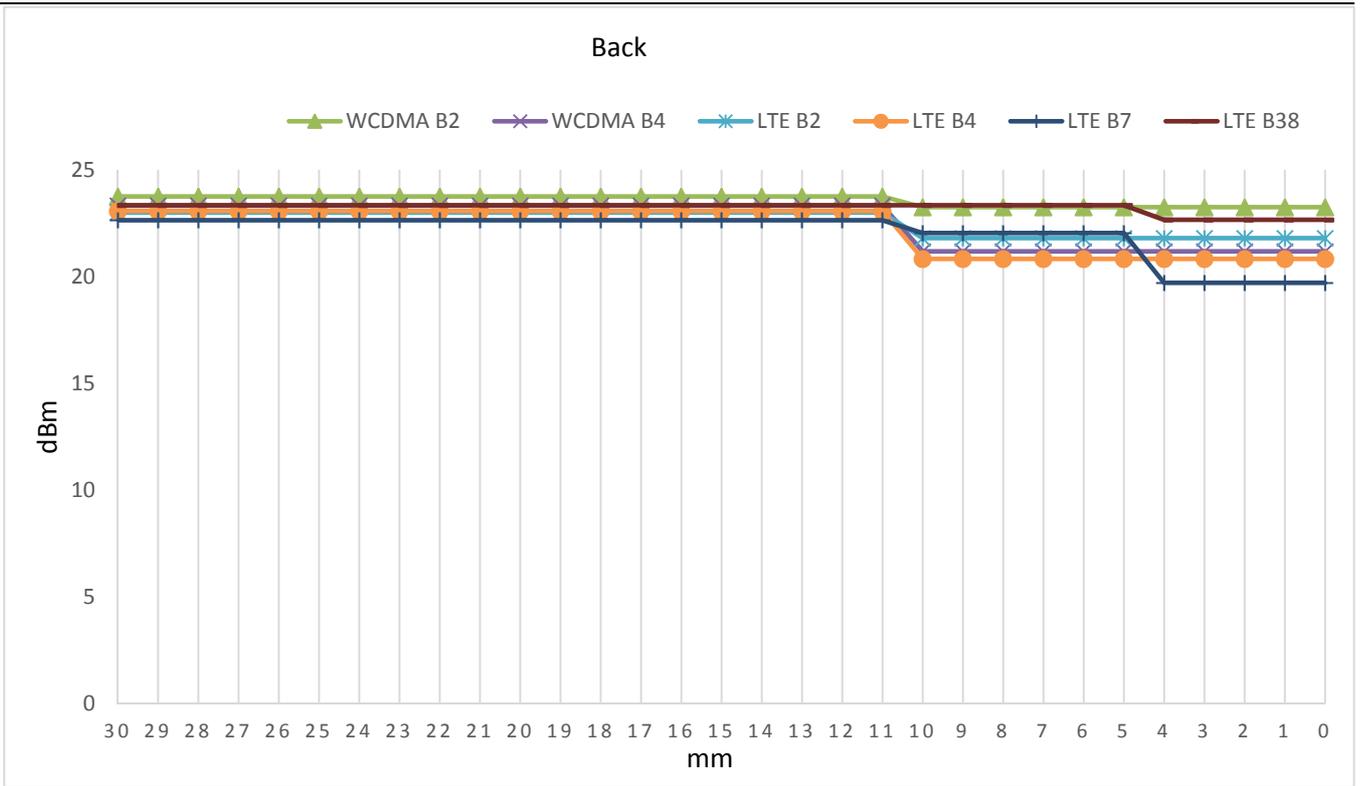

● DUT Moving Away (Release) from the Phantom

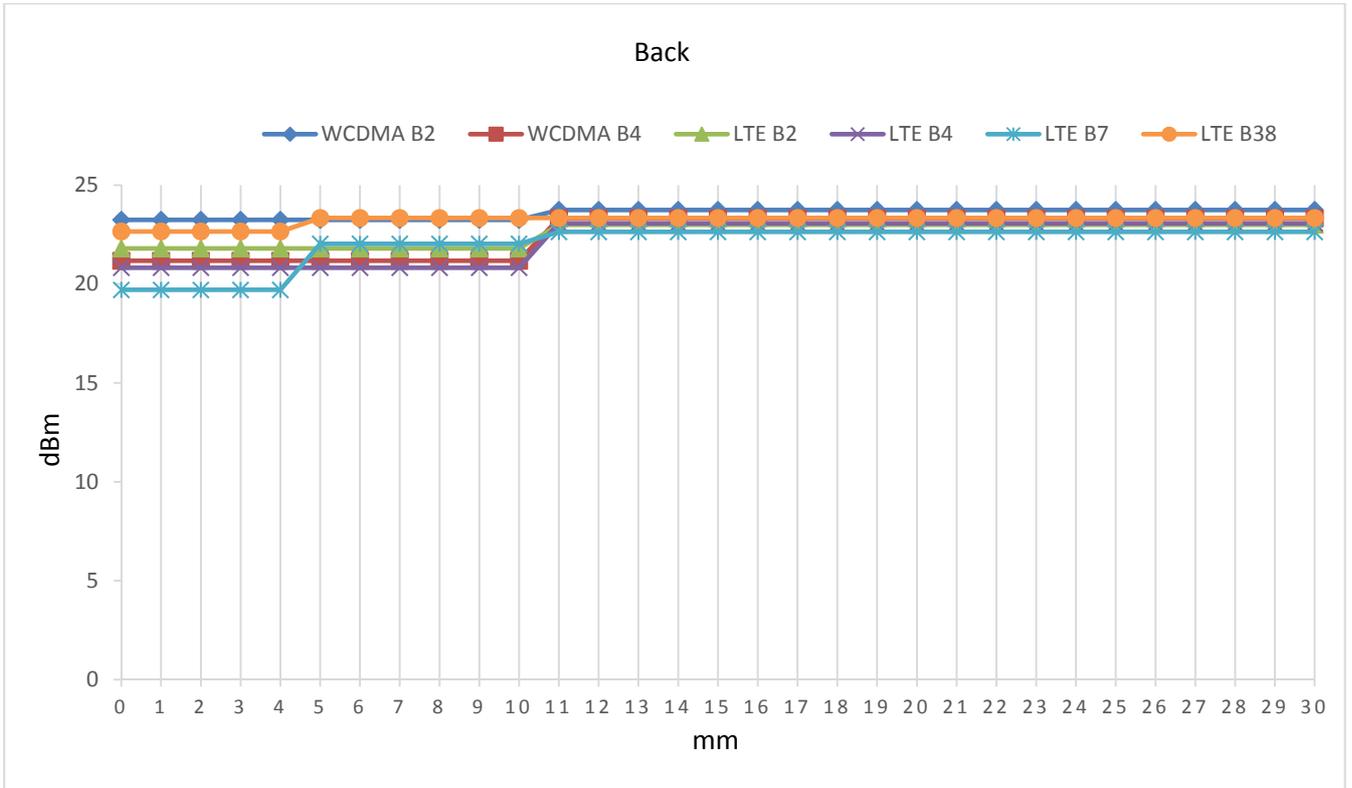

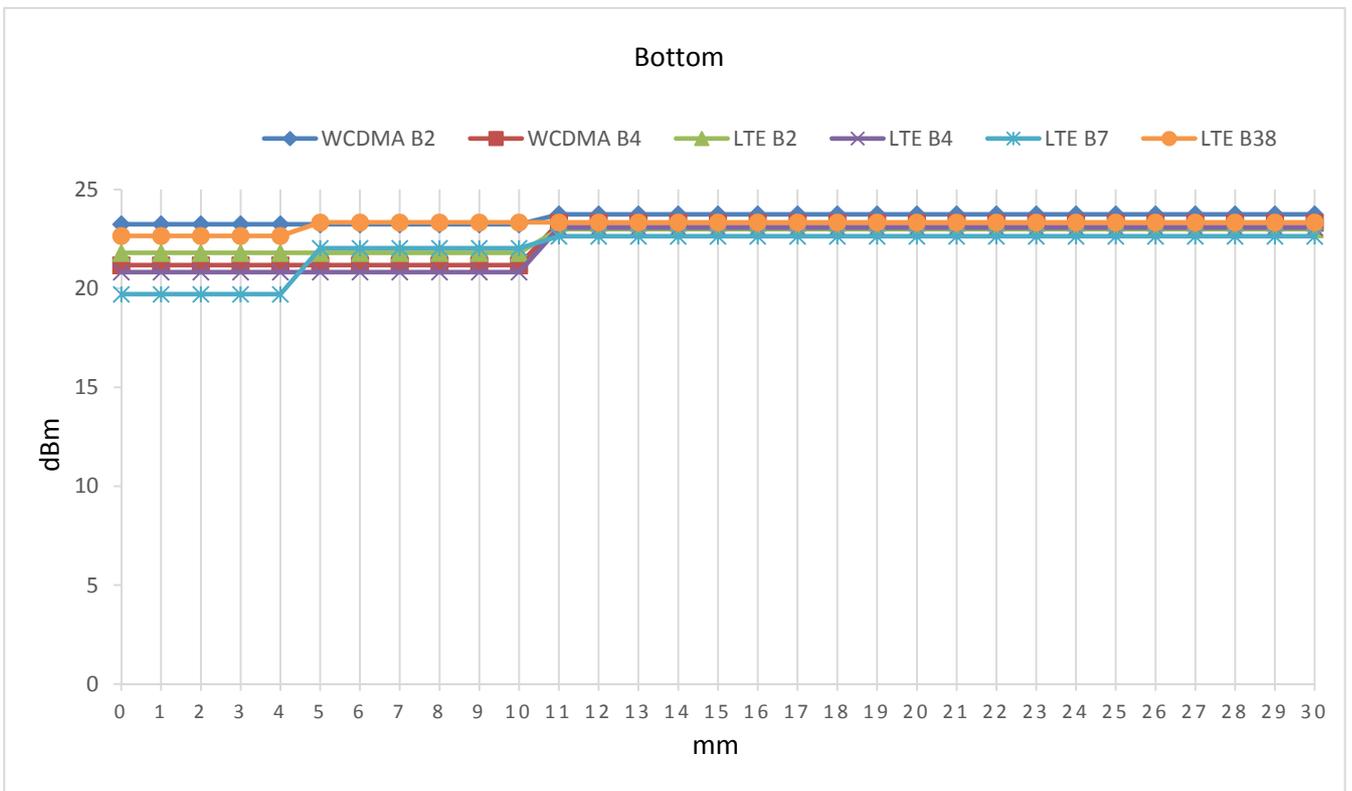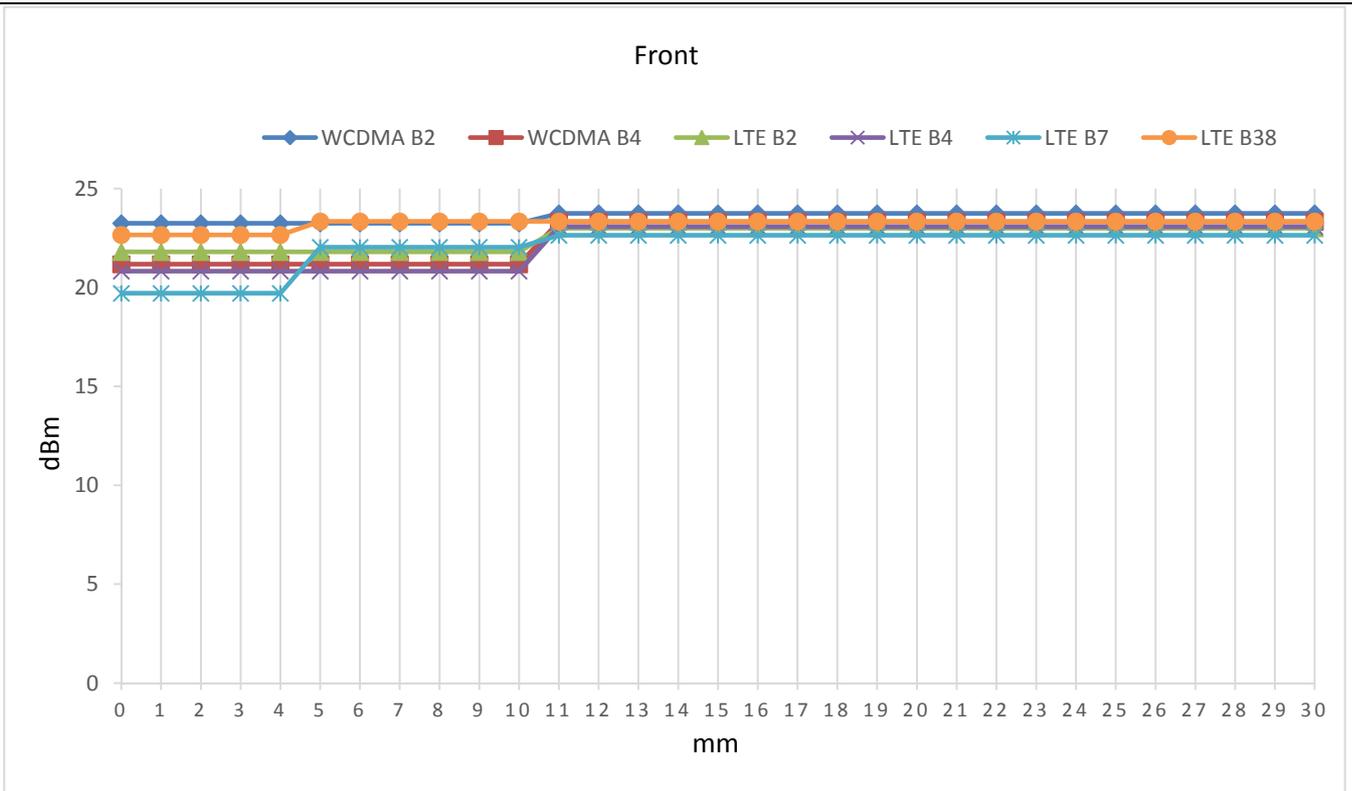

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)							
	450		700-950		1700-2000		2300-2700	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	40.30	50.75	55.24	70.17	55.00	68.53
Salt (NaCl)	3.95	1.49	1.38	0.94	0.31	0.39	0.2	0.1
Sucrose	56.32	46.78	57.90	48.21	0	0	0	0
HEC	0.98	0.52	0.24	0	0	0	0	0
Bactericide	0.19	0.05	0.18	0.10	0	0	0	0
Tween	0	0	0	0	44.45	29.44	44.80	31.37
Salt: 99+% Pure Sodium Chloride				Sucrose: 98+% Pure Sucrose				
Water: De-ionized, 16 MΩ ⁺ resistivity				HEC: Hydroxyethyl Cellulose				
Tween: Polyoxyethylene (20) sorbitan monolaurate								
HSL5GHz is composed of the following ingredients:								
Water: 50-65%								
Mineral oil: 10-30%								
Emulsifiers: 8-25%								
Sodium salt: 0-1.5%								
MSL5GHz is composed of the following ingredients:								
Water: 64-78%								
Mineral oil: 11-18%								
Emulsifiers: 9-15%								
Sodium salt: 2-3%								

Table 3 : Recipe of Tissue Simulate Liquid

6.1.2 Measurement for Tissue Simulate Liquid


The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^\circ\text{C}$.

Tissue Type	Measured Frequency (MHz)	Target Tissue ($\pm 5\%$)		Measured Tissue		Liquid Temp. ($^\circ\text{C}$)	Measured Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
750 Head	750	41.9 (39.81~44)	0.89 (0.85~0.94)	43.068	0.873	22.1	2018/2/23
750 Body	750	55.5 (52.73~58.28)	0.96 (0.91~1.00)	55.223	0.955	22.1	2018/2/25
835 Head	835	41.5 (39.43~43.58)	0.90 (0.86~0.95)	40.83	0.887	22.1	2018/2/23
835 Body	835	55.2 (52.44~57.96)	0.97 (0.92~1.02)	54.871	1.011	22.1	2018/2/24
1750 Head	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	40.441	1.317	22.2	2018/2/23
1750 Body	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	52.199	1.493	22.2	2018/2/26
1900 Head	1900	40.0 (38.00~42.00)	1.40 (1.33~1.47)	41.171	1.437	22.3	2018/2/23
1900 Body	1900	53.3 (50.64~55.97)	1.52 (1.44~1.60)	52.443	1.519	22.3	2018/2/24
1900 Body	1900	53.3 (50.64~55.97)	1.52 (1.44~1.60)	53.84	1.514	22.3	2018/2/25
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	38.488	1.878	22	2018/2/26
2450 Body	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	52.708	1.97	22	2018/2/26
2600 Head	2600	39.0 (37.05~40.95)	1.96 (1.86~2.06)	37.931	2.047	22.1	2018/2/22
2600 Body	2600	52.50 (49.88~55.13)	2.16 (2.05~2.27)	52.248	2.162	22.2	2018/2/24
5600 Head	5600	35.5 (33.73~37.28)	5.07 (4.82~5.32)	35.059	5.157	22.2	2018/2/26
5600 Body	5600	48.5 (46.08~50.93)	5.77 (5.48~6.06)	47.19	5.85	22.2	2018/2/26
5750 Body	5750	48.3 (45.89~50.72)	5.94 (5.64~6.24)	46.85	6.017	22.2	2018/2/26

Table 4 : Measurement result of Tissue electric parameters

6.2 SAR System Check

The microwave circuit arrangement for system check is sketched in bellow figure. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table. During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^\circ\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

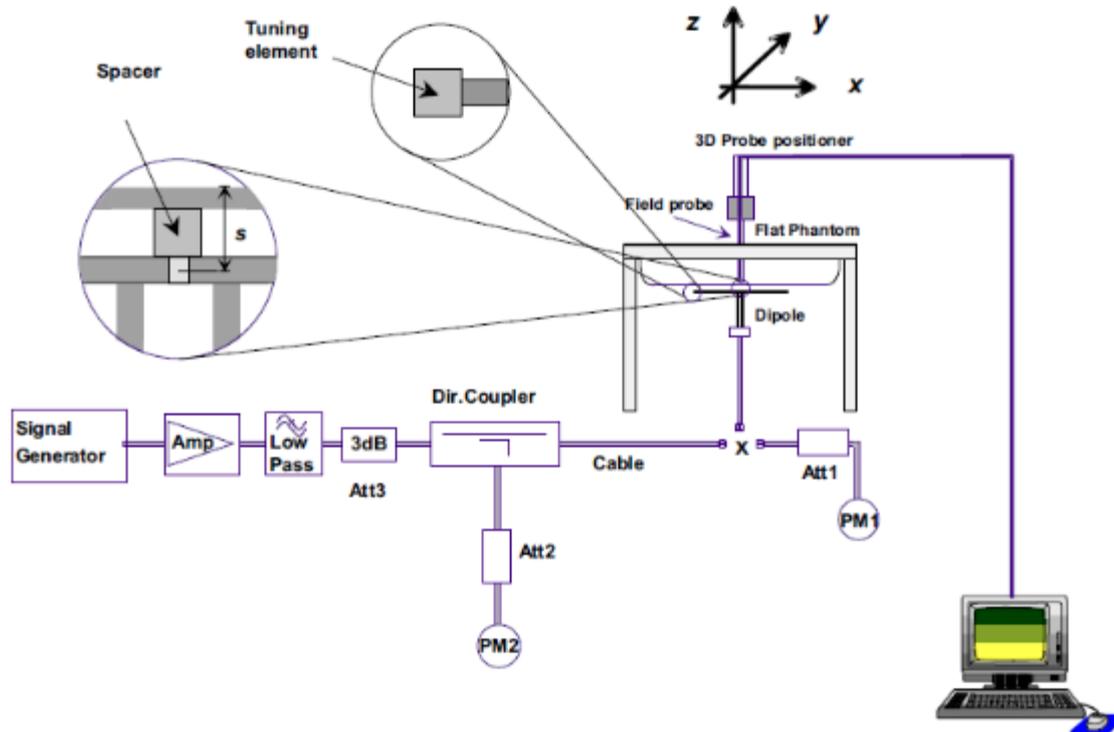

F-12. the microwave circuit arrangement used for SAR system check

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

6.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D750V2	Head	1.94	1.28	7.76	5.12	8.17 (7.35~8.99)	5.36 (4.82~5.9)	22.1	2018/2/23
	Body	2.11	1.41	8.44	5.64	8.57 (7.71~9.43)	5.66 (5.09~6.23)	22.1	2018/2/25
D835V2	Head	2.42	1.61	9.68	6.44	9.59 (8.63~10.55)	6.29 (5.66~6.92)	22.1	2018/2/23
	Body	2.34	1.58	9.36	6.32	9.65 (8.69~10.62)	6.46 (5.81~7.11)	22.1	2018/2/24
D1750V2	Head	8.73	4.69	34.92	18.76	36.7 (33.03~40.37)	19.5 (17.55~21.45)	22.2	2018/2/23
	Body	9.5	5.05	38	20.2	37 (33.30~40.70)	19.7 (17.73~21.67)	22.2	2018/2/26
D1900V2	Head	10.6	5.51	42.4	22.04	40.7 (36.63~44.77)	21.1 (18.99~23.21)	22.3	2018/2/23
	Body	10.5	5.51	42	22.04	41.6 (37.44~45.76)	21.4 (19.26~23.54)	22.3	2018/2/24
	Body	10.3	5.45	41.2	21.8	41.6 (37.44~45.76)	21.4 (19.26~23.54)	22.3	2018/2/25
D2450V2	Head	13.7	6.34	54.8	25.36	53.1 (47.79~58.41)	24.9 (22.41~27.39)	22	2018/2/26
	Body	12.7	5.94	50.8	23.76	51.0 (45.9~56.1)	23.5 (21.15~25.85)	22	2018/2/26
D2600V2	Head	14.5	6.4	58	25.6	56.6 (50.94~62.26)	25.4 (22.86~27.94)	22.1	2018/2/22
	Body	13.3	6.03	53.2	24.12	54.2 (48.78~59.62)	24.3 (21.87~26.73)	22.1	2018/2/24
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head(5.6GHz)	8.49	2.35	84.9	23.5	80.4 (72.36~88.44)	22.8 (20.52~25.08)	22.2	2018/2/26
	Body(5.6GHz)	7.74	2.18	77.4	21.8	81.1 (72.99~89.21)	22.9 (20.61~25.19)	22.2	2018/2/26
	Body(5.75GHz)	7.41	2.05	74.1	20.5	74.8 (67.32~82.28)	21 (18.9~23.1)	22.2	2018/2/26

Table 5 : SAR System Check Result

6.2.3 Detailed System Check Results

Please see the Appendix A

7 Test Configuration

7.1 3G SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

7.2 Operation Configurations

7.2.1 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to “5” and “0” in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode

7.2.2 WCDMA Test Configuration

1) . Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) . Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure

3) . Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

4) . HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	B_d	$\beta_d(\text{SF})$	β_c/β_d	β_{hs}	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: ΔACK , ΔNACK and $\Delta\text{CQI} = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, ΔACK and $\Delta\text{NACK} = 8$ ($A_{hs} = 30/15$) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta\text{CQI} = 7$ ($A_{hs} = 24/15$) with $\beta_{hs} = 24/15 * \beta_c$.
Note3: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 6 : settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	MaximumH S-DSCH Transport BlockBits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 7 : HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset“ and „Release 5 HSUPA Data Device“ sections of 3G device.

Sub-test ^c	β_c ^c	β_d ^c	β_d (SF) ^c	β_c/β_d ^c	β_{hs} ⁽¹⁾ ^c	β_{ac} ^c	β_{ed} ^c	β_c (SF) ^c	β_{ed} (code) ^c	CM ⁽²⁾ ^c (dB) ^c	MP R ^c (dB) ^c	AG ⁽⁴⁾ Inde ^x	E-TFC I ^c
1 ^c	11/15 ⁽³⁾ ^c	15/15 ⁽³⁾ ^c	64 ^c	11/15 ⁽³⁾ ^c	22/15 ^c	209/225 ^c	1039/225 ^c	4 ^c	1 ^c	1.0 ^c	0.0 ^c	20 ^c	75 ^c
2 ^c	6/15 ^c	15/15 ^c	64 ^c	6/15 ^c	12/15 ^c	12/15 ^c	94/75 ^c	4 ^c	1 ^c	3.0 ^c	2.0 ^c	12 ^c	67 ^c
3 ^c	15/15 ^c	9/15 ^c	64 ^c	15/9 ^c	30/15 ^c	30/15 ^c	$\beta_{ed1}:47/15$ ^c $\beta_{ed2}:47/15$ ^c	4 ^c	2 ^c	2.0 ^c	1.0 ^c	15 ^c	92 ^c
4 ^c	2/15 ^c	15/15 ^c	64 ^c	2/15 ^c	4/15 ^c	2/15 ^c	56/75 ^c	4 ^c	1 ^c	3.0 ^c	2.0 ^c	17 ^c	71 ^c
5 ^c	15/15 ⁽⁴⁾ ^c	15/15 ⁽⁴⁾ ^c	64 ^c	15/15 ⁽⁴⁾ ^c	30/15 ^c	24/15 ^c	134/15 ^c	4 ^c	1 ^c	1.0 ^c	0.0 ^c	21 ^c	81 ^c

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI=8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference^c
 Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ ^c
 Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ ^c
 Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g^c
 Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.^c

Table 8 : Subtests for UMTS Release 6 HSUPA

UE Category	E-DCH Codes Transmitted	Maximum E-DCH	Number of HARQ Processes	of E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	4	10	4	7110	0.7296
2	2	8	8	2	4	2798	1.4592
	2	4	4	10	4	14484	
3	2	4	4	10	4	14484	1.4592
4	2	8	8	2	2	5772	2.9185
	2	4	4	10	2	20000	2.00
5	2	4	4	10	2	20000	2.00
6 (No DPDCH)	4	8	8	10	2SF2&2SF	11484	5.76
	4	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	8	2	2SF2&2SF	22996	?
	4	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 9 : HSUPA UE category

c) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0.

A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 10 : settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

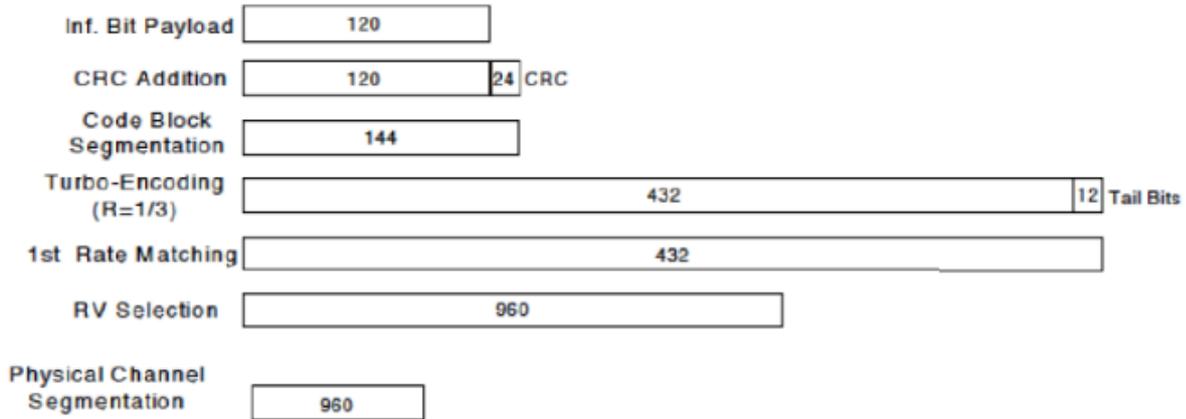


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	$\beta_d \cdot (SF)$ ^o	β_c / β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ ^o

Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.^o

Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ^o

Up commands are set continuously to set the UE to Max power.

Note:


1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.

7.2.3 WiFi Test Configuration


A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.2.3.1 Duty cycle

- 1) 2.4GHz Wi-Fi 802.11b:
WIFI1 802.11b 11M: Duty cycle=8.646/8.7255=99.09%

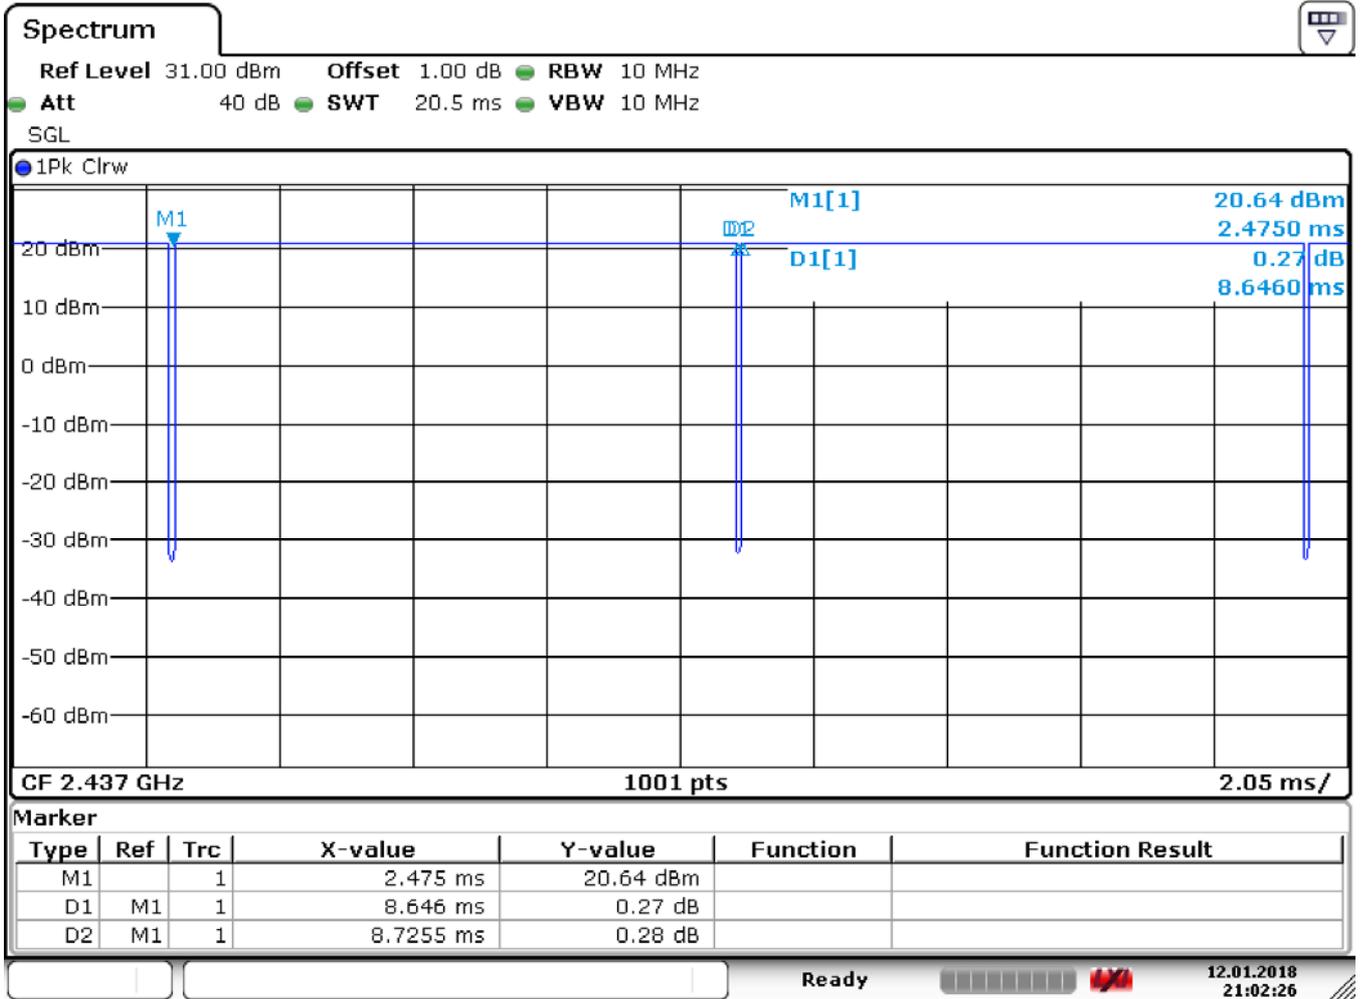


WiFi2 802.11b 11M: Duty cycle=8.628/8.728=98.85%

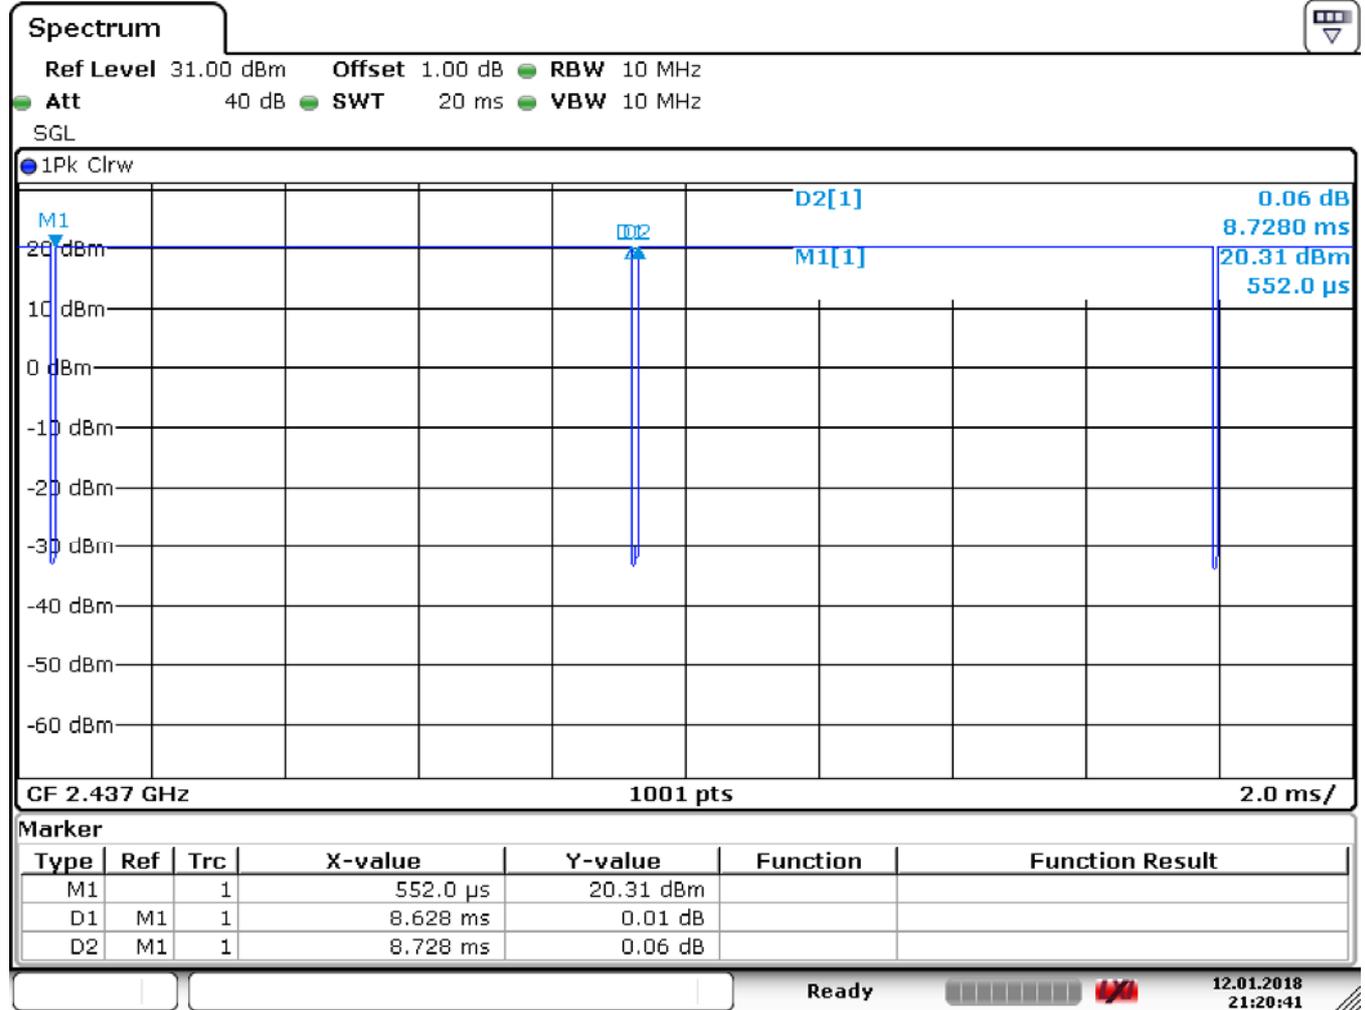


Date: 12.JAN.2018 21:20:41

2) 5GHz Wi-Fi 802.11a:
 WIFI1 802.11ac MCS0: Duty cycle=331.3/362.8=91.32%

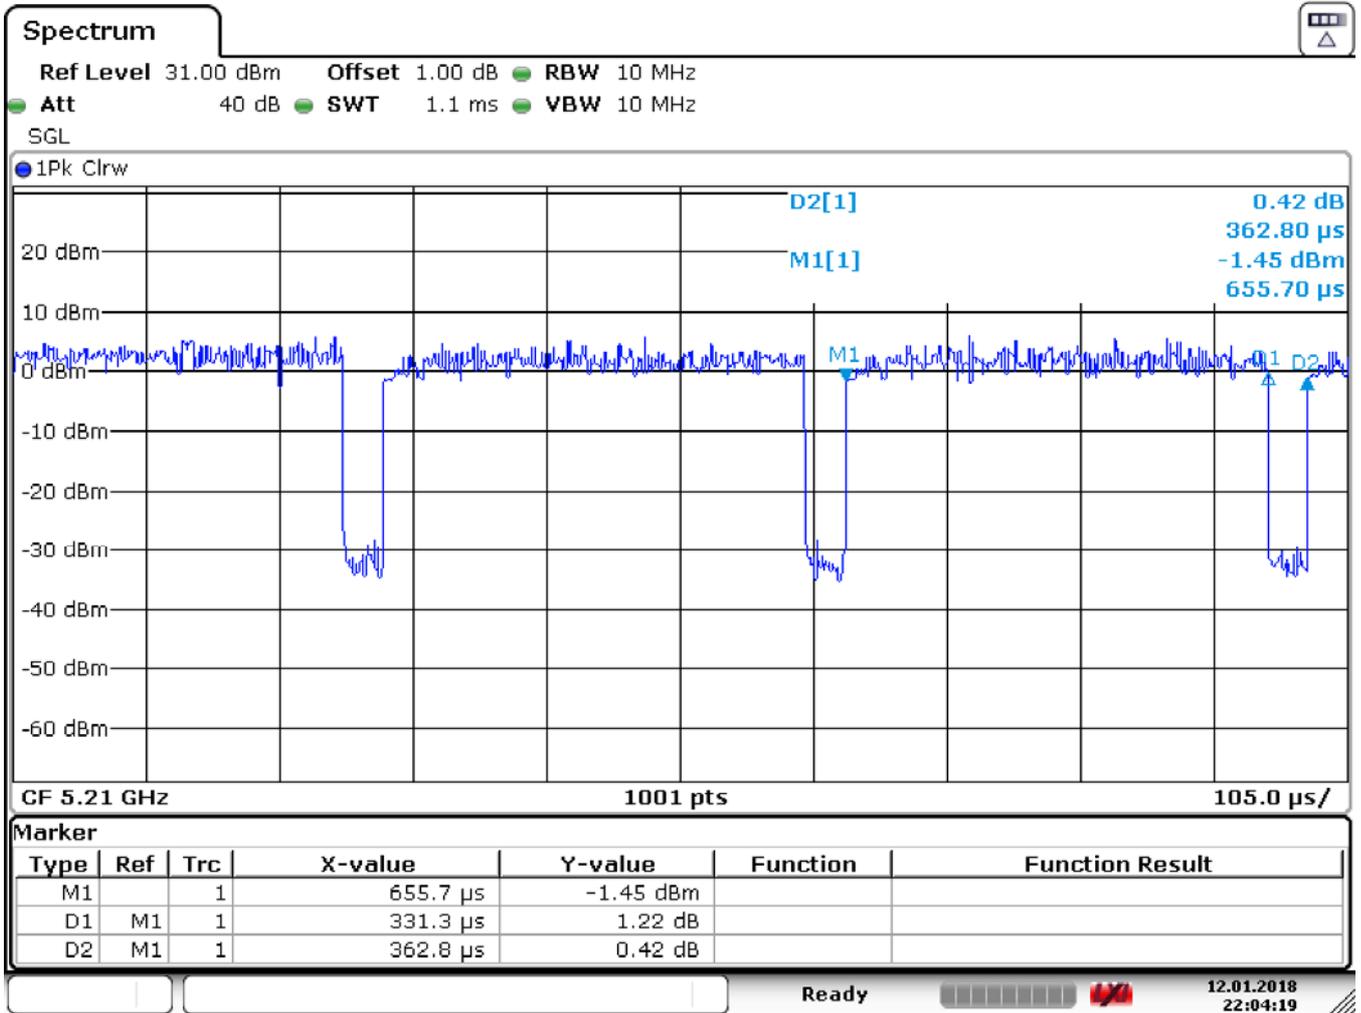


Date: 12.JAN.2018 22:04:19

WiFi1 802.11a 6M: Duty cycle=1.418/1.523=93.11%

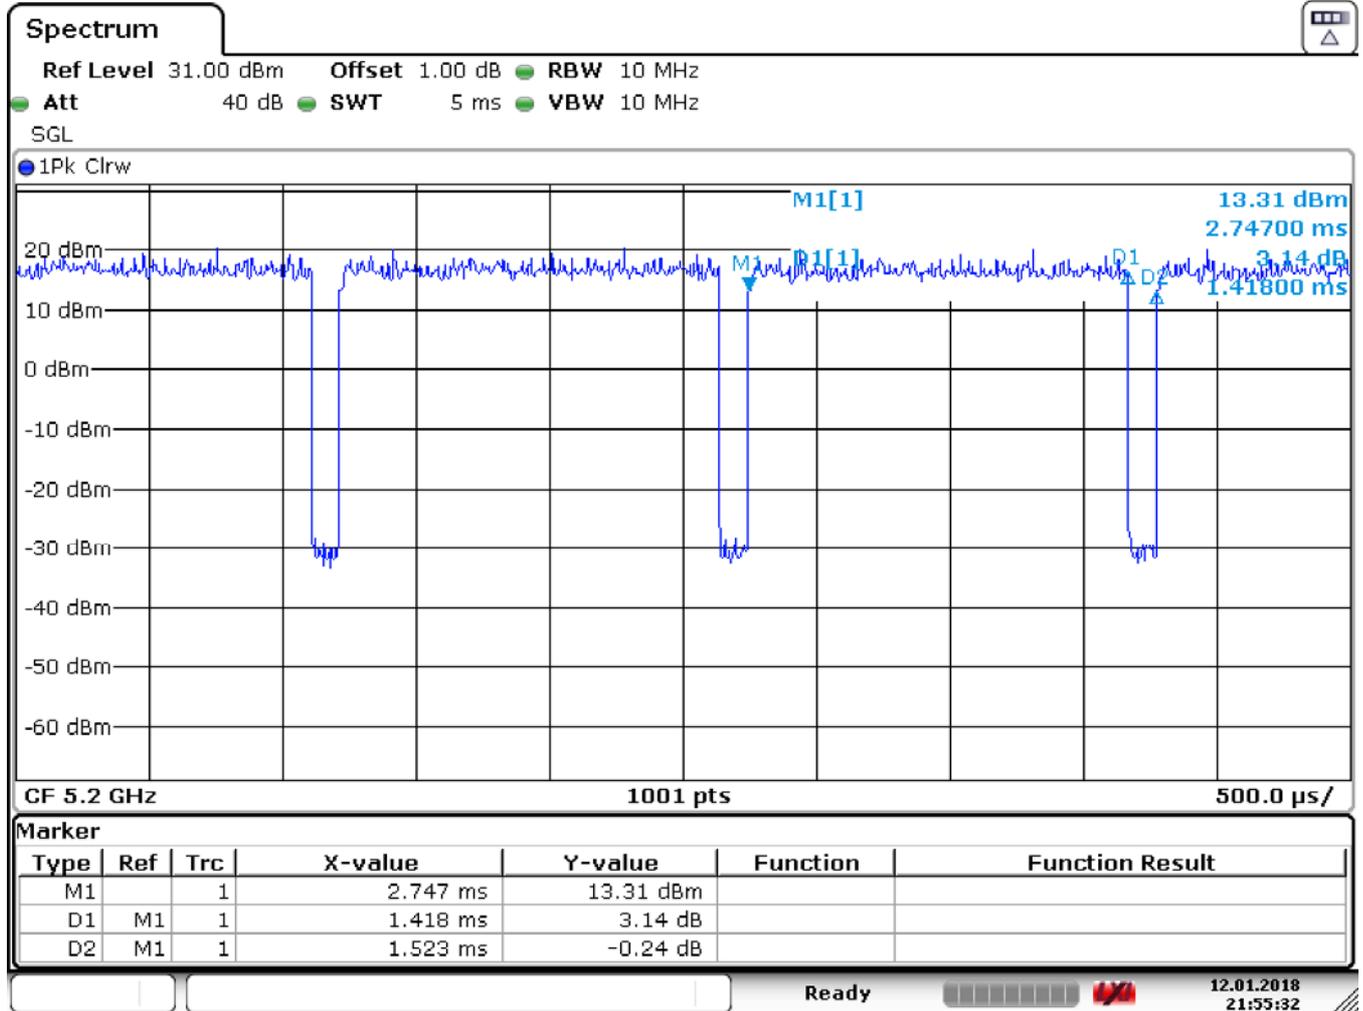

Date: 12.JAN.2018 21:55:32

WiFi2 802.11n (HT40): Duty cycle=666/726=91.74%

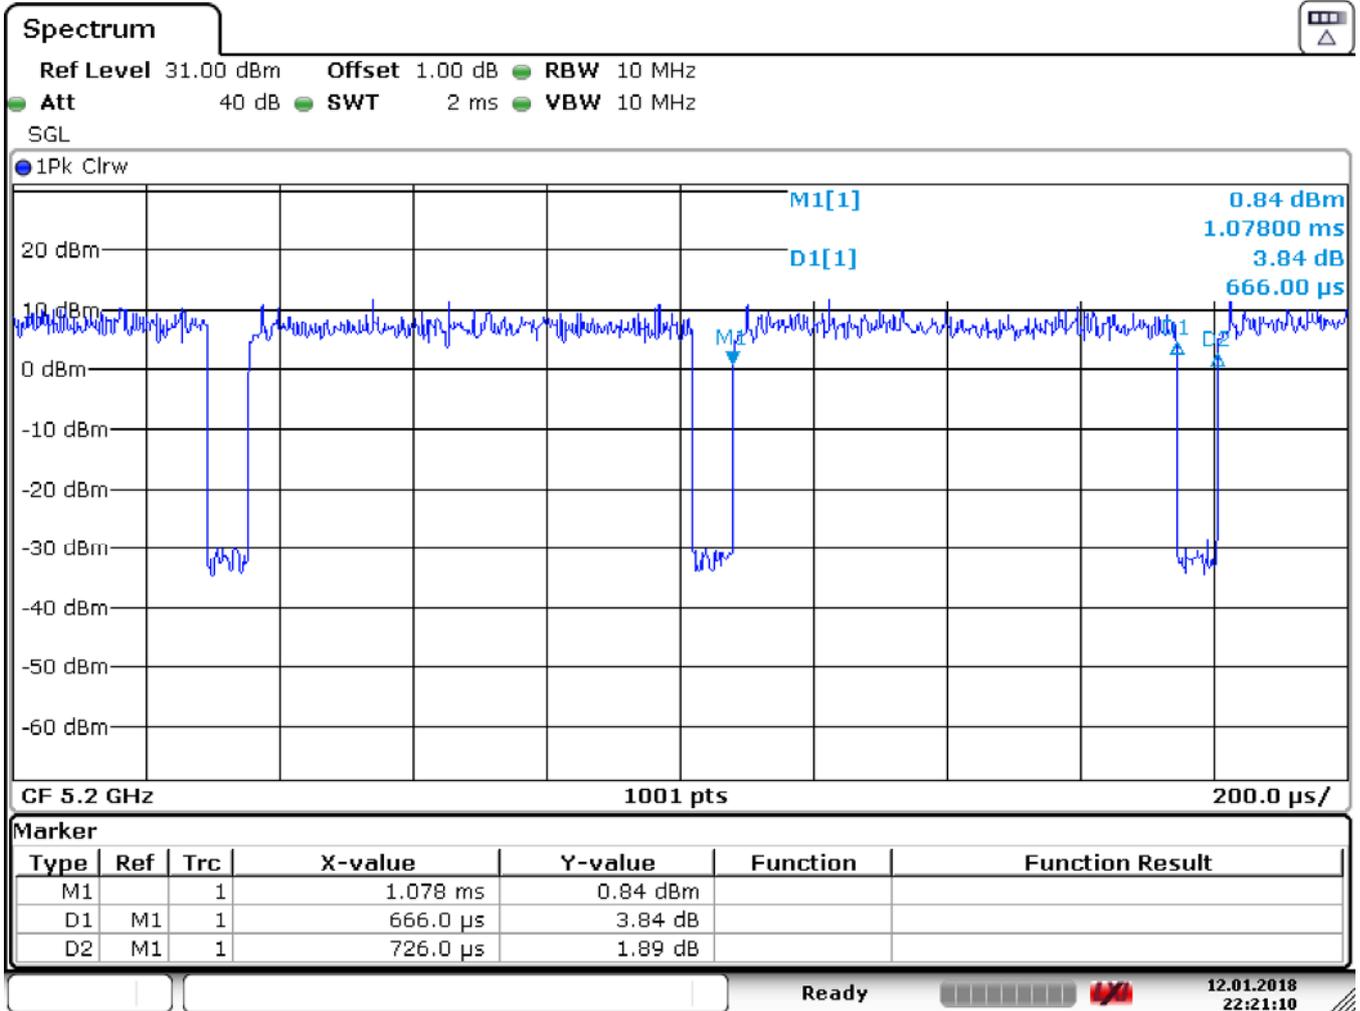

Date: 12.JAN.2018 22:21:10

7.2.3.2 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.2.3.3 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.2.3.4 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace “initial test configuration” with “all tested higher output power configurations”

7.2.3.5 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.2.3.6 5 GHz WiFi SAR Procedures

- **U-NII-1 and U-NII-2A Bands**

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

- **U-NII-2C and U-NII-3 Bands**

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

- **OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements**

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.

After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.

- a) The channel closest to mid-band frequency is selected for SAR measurement.
- b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.2.3.7 WiFi CDD/MIMO SAR Considerations

Per KDB 248227D01v02r01, simultaneous transmission provisions in KDB Publication 447498 should be used to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1-g SAR single transmission SAR measurement is <1.6W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

7.2.4 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.


TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

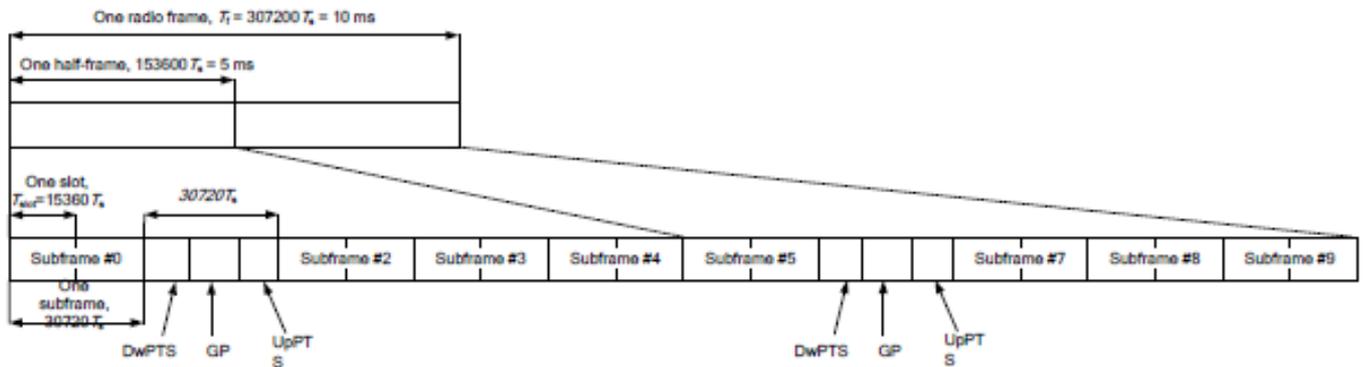

Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts			7680.Ts		
5	6592.Ts	4384.Ts	5120.Ts	20480.Ts	4384.Ts	5120.Ts
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-		
9	13168.Ts			-		

Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 V13.5.0 (2016-09) Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

8 Test Result

8.1 Measurement of RF Conducted Power

8.1.1 Conducted Power of Main Antenna

8.1.1.1 Conducted Power Of GSM

GSM 850 Full Power										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	32.59	32.75	32.81	33.6	-9.19	23.4	23.56	23.62	24.41
GPRS/EGPRS (GMSK)	1 TX Slot	32.62	32.71	32.83	33.6	-9.19	23.43	23.52	23.64	24.41
	2 TX Slots	30.42	30.59	30.57	32	-6.18	24.24	24.41	24.39	25.82
	3 TX Slots	28.13	28.21	28.24	30	-4.42	23.71	23.79	23.82	25.58
	4 TX Slots	26.12	26.16	26.19	27.6	-3.17	22.95	22.99	23.02	24.43
EGPRS(8PSK)	1 TX Slot	27.22	27.33	27.34	28	-9.19	18.03	18.14	18.15	18.81
	2 TX Slots	24.71	24.77	24.73	26	-6.18	18.53	18.59	18.55	19.82
	3 TX Slots	22.69	22.71	22.81	24	-4.42	18.27	18.29	18.39	19.58
	4 TX Slots	20.51	20.59	20.73	21.5	-3.17	17.34	17.42	17.56	18.33
GSM 1900 Full Power										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	30.24	30.25	30.33	31	-9.19	21.05	21.06	21.14	21.81
GPRS/EGPRS (GMSK)	1 TX Slot	30.29	30.21	30.35	31	-9.19	21.1	21.02	21.16	21.81
	2 TX Slots	27.81	27.83	27.79	29	-6.18	21.63	21.65	21.61	22.82
	3 TX Slots	25.65	25.54	25.49	27	-4.42	21.23	21.12	21.07	22.58
	4 TX Slots	23.55	23.41	23.48	24.5	-3.17	20.38	20.24	20.31	21.33
EGPRS(8PSK)	1 TX Slot	26.45	26.44	26.42	27	-9.19	17.26	17.25	17.23	17.81
	2 TX Slots	23.72	23.63	23.51	25	-6.18	17.54	17.45	17.33	18.82
	3 TX Slots	21.34	21.33	21.63	23	-4.42	16.92	16.91	17.21	18.58
	4 TX Slots	19.32	19.14	19.07	20.5	-3.17	16.15	15.97	15.9	17.33
GSM 1900 +Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	29.08	29.02	28.95	30	-9.19	19.89	19.83	19.76	20.81
GPRS/EGPRS (GMSK)	1 TX Slot	29.07	29.05	28.96	30	-9.19	19.88	19.86	19.77	20.81
	2 TX Slots	26.69	26.61	26.51	28	-6.18	20.51	20.43	20.33	21.82
	3 TX Slots	24.61	24.39	24.28	26	-4.42	20.19	19.97	19.86	21.58
	4 TX Slots	22.55	22.34	22.24	23.5	-3.17	19.38	19.17	19.07	20.33
EGPRS(8PSK)	1 TX Slot	25.06	24.94	24.79	26	-9.19	15.87	15.75	15.6	16.81
	2 TX Slots	22.46	22.65	22.45	24	-6.18	16.28	16.47	16.27	17.82
	3 TX Slots	20.63	20.51	20.36	22	-4.42	16.21	16.09	15.94	17.58
	4 TX Slots	18.59	18.53	18.36	19.5	-3.17	15.42	15.36	15.19	16.33

Table 11: Conducted Power Of GSM

Note:

- 1) . CMU200 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

- 2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
Frame-averaged power = $10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8$
- 3) . When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used

8.1.1.2 Conducted Power Of WCDMA

WCDMA Band II Full Power					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	23.77	23.74	23.73	24.5
	12.2kbps AMR	23.74	23.69	23.69	24.5
HSDPA	Subtest 1	23.22	23.18	23.15	24
	Subtest 2	22.69	22.66	22.63	23.5
	Subtest 3	21.68	21.62	21.58	22.5
	Subtest 4	21.67	21.63	21.63	22.5
HSUPA	Subtest 1	22.19	22.14	22.1	23
	Subtest 2	19.78	19.73	19.66	20.5
	Subtest 3	20.24	20.22	20.14	21
	Subtest 4	19.44	19.37	19.31	20
	Subtest 5	22.28	22.3	22.29	23
DC-HSDPA	Subtest 1	23.24	23.24	23.26	24
	Subtest 2	22.72	22.74	22.73	23.5
	Subtest 3	21.71	21.74	21.72	22.5
	Subtest 4	21.74	21.74	21.76	22.5
WCDMA Band II Hotspot on+sensor off					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	18.76	18.74	18.65	19.5
	12.2kbps AMR	18.7	18.69	18.59	19.5
HSDPA	Subtest 1	18.19	18.19	18.06	19
	Subtest 2	17.67	17.66	17.53	18.5
	Subtest 3	16.62	16.65	16.5	17.5
	Subtest 4	16.64	16.65	16.49	17.5
HSUPA	Subtest 1	17.16	17.17	17.01	18
	Subtest 2	14.73	14.73	14.55	15.5
	Subtest 3	15.18	15.25	15.04	16
	Subtest 4	14.31	14.44	14.2	15
	Subtest 5	17.29	17.33	17.17	18
DC-HSDPA	Subtest 1	18.22	18.19	18.1	19
	Subtest 2	17.71	17.67	17.6	18.5
	Subtest 3	16.73	16.66	16.61	17.5
	Subtest 4	16.74	16.69	16.65	17.5
WCDMA Band II Hotspot on+sensor on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	18.21	18.25	18.17	19
	12.2kbps AMR	18.16	18.2	18.14	19
HSDPA	Subtest 1	17.63	17.68	17.59	18.5
	Subtest 2	17.13	17.17	17.08	18
	Subtest 3	16.09	16.13	16.08	17
	Subtest 4	16.09	16.16	16.05	17

HSUPA	Subtest 1	16.59	16.64	16.58	17.5
	Subtest 2	14.1	14.16	14.16	15
	Subtest 3	14.64	14.73	14.63	15.5
	Subtest 4	13.81	13.87	13.78	14.5
	Subtest 5	16.72	16.81	16.75	17.5
DC-HSDPA	Subtest 1	17.67	17.71	17.64	18.5
	Subtest 2	17.18	17.2	17.12	18
	Subtest 3	16.14	16.16	16.08	17
	Subtest 4	16.2	16.24	16.12	17
WCDMA Band II Body Scene(0mm SAR sensor on Level D1&D4&D5)					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	23.18	23.24	23.09	24
	12.2kbps AMR	23.14	23.19	23.06	24
HSDPA	Subtest 1	22.64	22.65	22.51	23.5
	Subtest 2	22.12	22.13	21.96	23
	Subtest 3	21.08	21.09	20.96	22
	Subtest 4	21.12	21.11	20.93	22
HSUPA	Subtest 1	21.6	21.62	21.49	22.5
	Subtest 2	19.11	19.16	19.01	20
	Subtest 3	19.63	19.71	19.5	20.5
	Subtest 4	18.79	18.81	18.69	19.5
	Subtest 5	21.78	21.82	21.6	22.5
DC-HSDPA	Subtest 1	22.65	22.7	22.56	23.5
	Subtest 2	22.16	22.17	22.07	23
	Subtest 3	21.16	21.16	21.03	22
	Subtest 4	21.14	21.21	21.05	22

WCDMA Band IV Full Power					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	23.29	23.31	23.36	24
	12.2kbps AMR	23.24	23.28	23.32	24
HSDPA	Subtest 1	22.73	22.73	22.78	23.5
	Subtest 2	22.19	22.23	22.26	23
	Subtest 3	21.67	21.69	21.73	22.5
	Subtest 4	21.66	21.7	21.75	22.5
HSUPA	Subtest 1	21.23	21.23	21.25	22
	Subtest 2	18.77	18.81	18.76	20
	Subtest 3	19.32	19.28	19.29	20.5
	Subtest 4	18.48	18.45	18.4	19.5
	Subtest 5	21.4	21.46	21.5	22
DC-HSDPA	Subtest 1	22.76	22.77	22.82	23.5
	Subtest 2	22.27	22.28	22.35	23
	Subtest 3	21.7	21.77	21.79	22.5
	Subtest 4	21.74	21.79	21.86	22.5
WCDMA Band IV Hotspot on+sensor off					

Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	18.16	18.18	18.35	19
	12.2kbps AMR	18.14	18.14	18.3	19
HSDPA	Subtest 1	17.63	17.59	17.76	18.5
	Subtest 2	17.09	17.06	17.26	18
	Subtest 3	16.56	16.54	16.73	17.5
	Subtest 4	16.59	16.56	16.72	17.5
HSUPA	Subtest 1	16.08	16.06	16.21	17
	Subtest 2	13.64	13.64	13.78	15
	Subtest 3	14.16	14.09	14.28	15.5
	Subtest 4	13.35	13.2	13.41	14.5
	Subtest 5	16.35	16.35	16.52	17
DC-HSDPA	Subtest 1	17.62	17.66	17.85	18.5
	Subtest 2	17.08	17.12	17.33	18
	Subtest 3	16.59	16.58	16.81	17.5
	Subtest 4	16.65	16.67	16.8	17.5
WCDMA Band IV Hotspot on+sensor on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	16.28	16.27	16.14	17
	12.2kbps AMR	16.25	16.24	16.1	17
HSDPA	Subtest 1	15.74	15.73	15.56	16.5
	Subtest 2	15.23	15.2	15.03	16
	Subtest 3	14.69	14.66	14.5	15.5
	Subtest 4	14.71	14.67	14.51	15.5
HSUPA	Subtest 1	14.21	14.18	14.03	15
	Subtest 2	11.77	11.75	11.54	13
	Subtest 3	12.28	12.24	12.1	13.5
	Subtest 4	11.38	11.41	11.24	12.5
	Subtest 5	14.42	14.43	14.31	15
DC-HSDPA	Subtest 1	15.75	15.75	15.6	16.5
	Subtest 2	15.27	15.23	15.09	16
	Subtest 3	14.74	14.76	14.62	15.5
	Subtest 4	14.77	14.75	14.62	15.5
WCDMA Band IV Body Scene(0mm SAR sensor on Level D1&D4&D5)					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	21.21	21.17	21.39	22
	12.2kbps AMR	21.15	21.14	21.34	22
HSDPA	Subtest 1	20.61	20.59	20.83	21.5
	Subtest 2	20.09	20.07	20.3	21
	Subtest 3	19.57	19.56	19.78	20.5
	Subtest 4	19.56	19.54	19.79	20.5
HSUPA	Subtest 1	19.09	19.09	19.32	20
	Subtest 2	16.59	16.62	16.83	18
	Subtest 3	17.15	17.17	17.36	18.5

	Subtest 4	16.27	16.29	16.53	17.5
	Subtest 5	19.34	19.28	19.51	20
DC-HSDPA	Subtest 1	20.69	20.65	20.85	21.5
	Subtest 2	20.19	20.17	20.35	21
	Subtest 3	19.62	19.64	19.84	20.5
	Subtest 4	19.67	19.66	19.85	20.5

WCDMA Band V Full Power					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	23.61	23.66	23.72	24.5
	12.2kbps AMR	23.55	23.61	23.66	24.5
HSDPA	Subtest 1	23.48	23.6	23.63	24.5
	Subtest 2	23.08	23.19	23.21	24
	Subtest 3	22.68	22.7	22.77	23.5
	Subtest 4	22.6	22.7	22.75	23.5
HSUPA	Subtest 1	23.02	23.1	23.17	24
	Subtest 2	20.61	20.69	20.72	21.5
	Subtest 3	21.66	21.67	21.82	22.5
	Subtest 4	20.79	20.82	20.84	21.5
	Subtest 5	22.29	22.31	22.41	23
DC-HSDPA	Subtest 1	23.46	23.53	23.58	24.5
	Subtest 2	23.21	23.25	23.28	24
	Subtest 3	22.64	22.7	22.73	23.5
	Subtest 4	22.7	22.74	22.81	23.5

Table 12: Conducted Power Of WCDMA

Note:

- 1) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

8.1.1.3 Conducted Power Of LTE

LTE Band 2 Full Power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	22.99	22.99	22.91	24
		1	2	22.55	22.43	22.2	24
		1	5	23.03	23.02	23	24
		3	0	22.87	22.86	22.81	24
		3	2	22.72	22.94	22.79	24
		3	3	22.89	22.81	22.84	24
		6	0	21.96	21.87	21.79	23
	16QAM	1	0	22.23	22.24	22.14	23
		1	2	21.87	21.9	21.95	23
		1	5	22.17	22.15	22.13	23
		3	0	21.81	21.82	21.82	23
		3	2	21.84	21.83	21.94	23
		3	3	21.97	21.86	21.79	23
		6	0	20.93	20.86	21.01	22
	64QAM	1	0	21.33	21.29	21.15	22
		1	2	20.89	20.92	21.04	22
		1	5	21.22	21.16	21.13	22
		3	0	20.91	20.9	20.88	22
		3	2	20.83	20.91	21.01	22
		3	3	20.98	20.89	20.85	22
		6	0	19.99	19.84	20.07	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	23.02	22.96	22.95	24
		1	7	22.18	22.54	22.25	24
		1	14	22.96	22.92	23	24
		8	0	21.91	21.89	21.88	23
		8	4	21.96	21.96	21.9	23
		8	7	21.96	21.98	21.94	23
		15	0	21.94	21.94	21.92	23
	16QAM	1	0	22.27	22.21	22.24	23
		1	7	22.17	21.77	21.83	23
		1	14	22.17	22.24	22.29	23
		8	0	20.82	20.83	20.81	22
		8	4	20.74	20.75	20.81	22
		8	7	20.92	20.79	20.8	22
		15	0	20.9	20.97	20.93	22
	64QAM	1	0	21.28	21.2	21.3	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18625	18900	19175		
		1	7	21.17	20.75	20.84	22	
		1	14	21.22	21.25	21.37	22	
		8	0	19.85	19.84	19.87	21	
		8	4	19.82	19.77	19.85	21	
		8	7	20	19.8	19.86	21	
		15	0	19.96	19.98	20.03	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18650	18900	19150		
5MHz	QPSK	1	0	23	22.99	22.93	24	
		1	13	22.93	22.96	22.95	24	
		1	24	22.95	22.97	23	24	
		12	0	22	22.03	21.97	23	
		12	6	21.91	21.95	21.9	23	
		12	13	21.97	22.04	21.97	23	
		25	0	21.93	21.94	21.94	23	
	16QAM	1	0	22.22	22.26	22.22	23	
		1	13	22.26	22.21	22.25	23	
		1	24	22.28	22.23	22.3	23	
		12	0	20.99	20.99	20.92	22	
		12	6	20.99	20.95	20.88	22	
		12	13	20.95	20.96	20.98	22	
		25	0	20.9	20.9	20.9	22	
	64QAM	1	0	21.27	21.25	21.22	22	
		1	13	21.29	21.29	21.35	22	
		1	24	21.3	21.33	21.33	22	
		12	0	20	20.01	20.01	21	
		12	6	20.07	19.94	19.92	21	
		12	13	19.97	20.04	20.04	21	
		25	0	19.95	19.92	19.94	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18650	18900	19150	
	10MHz	QPSK	1	0	22.97	22.95	22.95	24
1			25	22.99	22.92	22.79	24	
1			49	22.92	22.93	22.95	24	
25			0	22	21.96	21.97	23	
25			13	21.98	21.95	21.92	23	
25			25	21.98	21.94	21.95	23	
50			0	21.97	21.92	21.95	23	
16QAM		1	0	22.33	22.3	22.17	23	
		1	25	22.11	22.32	22.02	23	
		1	49	22.23	22.2	22.23	23	
		25	0	20.93	20.89	20.88	22	
		25	13	20.93	20.92	20.92	22	
		25	25	20.94	20.92	20.89	22	
		50	0	20.91	20.89	20.86	22	

		1	0	21.43	21.38	21.17	22	
		1	25	21.19	21.42	21.06	22	
		1	49	21.26	21.3	21.24	22	
	64QAM	25	0	20.02	19.94	19.87	21	
		25	13	19.97	19.96	20.01	21	
		25	25	19.93	19.92	19.87	21	
		50	0	20.01	19.98	19.93	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18675	18900	19125		
15MHz	QPSK	1	0	22.97	22.94	22.91	24	
		1	38	23.04	22.93	22.96	24	
		1	74	22.93	22.89	22.92	24	
		36	0	22.02	22.02	22.02	23	
		36	18	21.99	21.98	22.01	23	
		36	39	21.97	22.01	21.96	23	
		75	0	21.99	21.94	21.98	23	
	16QAM	1	0	22.27	22.26	22.24	23	
		1	38	22.27	22.3	22.27	23	
		1	74	22.19	22.18	22.21	23	
		36	0	21.02	20.95	20.92	22	
		36	18	20.93	20.95	20.88	22	
		36	39	20.93	20.93	20.95	22	
		75	0	20.95	20.89	20.88	22	
	64QAM	1	0	21.32	21.27	21.25	22	
		1	38	21.28	21.36	21.36	22	
		1	74	21.29	21.17	21.28	22	
		36	0	20	19.96	20.01	21	
		36	18	19.92	20.02	19.96	21	
		36	39	19.92	20	19.98	21	
		75	0	19.94	19.93	19.9	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18700	18900	19100	
	20MHz	QPSK	1	0	23.12	23.05	23.04	24
1			50	22.92	22.68	22.68	24	
1			99	23.03	22.99	23.02	24	
50			0	22.01	21.98	22.01	23	
50			25	21.95	21.95	21.93	23	
50			50	22.03	21.97	21.98	23	
100			0	22.02	21.95	21.93	23	
16QAM		1	0	22.37	22.25	22.42	23	
		1	50	22.34	22.14	21.99	23	
		1	99	22.35	22.22	22.16	23	
		50	0	20.96	20.95	20.93	22	
		50	25	20.88	20.89	20.9	22	
		50	50	20.92	20.9	20.95	22	

		100	0	20.9	20.92	20.89	22
	64QAM	1	0	21.38	21.3	21.48	22
		1	50	21.4	21.21	21.06	22
		1	99	21.41	21.28	21.2	22
		50	0	19.94	20.05	20.03	21
		50	25	19.98	19.92	19.88	21
		50	50	19.95	19.91	20.03	21
		100	0	19.9	19.99	19.88	21

LTE Band 2 Hotspot on+sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	18.02	17.99	17.94	19
		1	2	17.47	17.46	17.36	19
		1	5	18	17.97	18.01	19
		3	0	17.92	17.89	17.91	19
		3	2	17.87	18.03	17.88	19
		3	3	17.83	17.84	17.87	19
		6	0	17.87	17.92	17.99	19
	16QAM	1	0	18.19	18.15	18.14	19
		1	2	17.96	18	17.94	19
		1	5	18.21	18.06	18.04	19
		3	0	17.96	17.8	17.78	19
		3	2	18.01	17.87	17.81	19
		3	3	18.03	17.99	17.97	19
		6	0	17.87	17.83	17.84	19
	64QAM	1	0	18.13	18.06	18.04	19
		1	2	17.83	17.98	17.88	19
		1	5	18.09	17.94	17.87	19
		3	0	17.9	17.63	17.67	19
		3	2	17.86	17.84	17.72	19
		3	3	17.92	17.84	17.82	19
		6	0	17.8	17.82	17.69	19
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	18.01	17.97	17.99	19
		1	7	17.57	17.64	17.42	19
		1	14	17.99	18	18	19
		8	0	17.9	17.85	17.89	19
		8	4	17.85	17.85	17.85	19
		8	7	17.92	17.87	17.81	19
		15	0	18	17.97	17.93	19
	16QAM	1	0	18.22	18.32	18.28	19
		1	7	17.81	17.76	17.63	19

		1	14	18.25	18.18	18.27	19	
		8	0	17.87	17.91	17.84	19	
		8	4	17.88	17.91	17.91	19	
		8	7	17.89	17.84	17.72	19	
		15	0	17.94	17.9	17.88	19	
	64QAM	1	0	18.12	18.24	18.13	19	
		1	7	17.74	17.72	17.51	19	
		1	14	18.1	18.04	18.16	19	
		8	0	17.8	17.87	17.73	19	
		8	4	17.71	17.75	17.82	19	
		8	7	17.82	17.76	17.7	19	
		15	0	17.85	17.8	17.8	19	
	Bandwidth	Modulation	RB size	RB offset	Channel 18625	Channel 18900	Channel 19175	Tune up
	5MHz	QPSK	1	0	18.01	18.01	18	19
1			13	17.99	18.01	17.96	19	
1			24	17.97	18	17.97	19	
12			0	17.98	18.01	18.01	19	
12			6	17.95	17.96	17.91	19	
12			13	18.01	17.98	18	19	
25			0	17.96	17.93	17.91	19	
16QAM		1	0	18.28	18.33	18.3	19	
		1	13	18.34	18.31	18.25	19	
		1	24	18.19	18.26	18.3	19	
		12	0	17.98	17.99	17.97	19	
		12	6	17.93	17.93	17.91	19	
		12	13	17.97	17.97	17.94	19	
		25	0	17.9	17.87	17.86	19	
64QAM		1	0	18.2	18.26	18.16	19	
		1	13	18.3	18.2	18.16	19	
		1	24	18.06	18.1	18.14	19	
		12	0	17.85	17.91	17.92	19	
		12	6	17.86	17.89	17.77	19	
		12	13	17.88	17.81	17.92	19	
		25	0	17.87	17.72	17.78	19	
Bandwidth	Modulation	RB size	RB offset	Channel 18650	Channel 18900	Channel 19150	Tune up	
10MHz	QPSK	1	0	18	17.96	17.95	19	
		1	25	17.89	17.73	17.8	19	
		1	49	17.92	17.92	17.96	19	
		25	0	17.99	17.96	18.01	19	
		25	13	17.95	17.94	17.93	19	
		25	25	17.99	17.92	17.94	19	
		50	0	17.97	17.94	17.93	19	
	16QAM	1	0	18.27	18.27	18.35	19	

		1	25	18.22	18.24	18.11	19	
		1	49	18.21	18.18	18.34	19	
		25	0	17.95	17.93	17.91	19	
		25	13	17.9	17.9	17.89	19	
		25	25	17.9	17.86	17.88	19	
		50	0	17.9	17.85	17.89	19	
	64QAM	1	0	18.11	18.26	18.18	19	
		1	25	18.14	18.08	17.97	19	
		1	49	18.16	18.11	18.22	19	
		25	0	17.85	17.93	17.82	19	
		25	13	17.76	17.77	17.75	19	
		25	25	17.83	17.84	17.84	19	
		50	0	17.88	17.68	17.77	19	
		50	0	17.88	17.68	17.77	19	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18675	18900	19125		
15MHz	QPSK	1	0	17.96	17.95	17.96	19	
		1	38	18.03	17.99	17.91	19	
		1	74	17.9	17.9	17.92	19	
		36	0	18.04	18.05	18	19	
		36	18	17.99	18.03	17.97	19	
		36	39	17.98	17.98	18	19	
		75	0	17.98	17.99	17.96	19	
	16QAM	1	0	18.22	18.25	18.09	19	
		1	38	18.26	18.19	18.29	19	
		1	74	18.11	18.21	18.2	19	
		36	0	17.99	17.95	17.91	19	
		36	18	17.98	17.94	17.92	19	
		36	39	17.89	17.91	17.9	19	
		75	0	17.92	17.88	17.91	19	
	64QAM	1	0	18.1	18.18	17.95	19	
		1	38	18.16	18.17	18.15	19	
		1	74	18.09	18.07	18.12	19	
		36	0	17.88	17.92	17.78	19	
		36	18	17.85	17.81	17.83	19	
		36	39	17.86	17.8	17.77	19	
		75	0	17.78	17.87	17.87	19	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18700	18900	19100	
	20MHz	QPSK	1	0	18.11	18.09	18.08	19
1			50	17.72	17.64	17.63	19	
1			99	18.09	18.01	18.02	19	
50			0	18.04	17.96	18	19	
50			25	17.97	17.94	17.95	19	
50			50	18.01	17.93	17.95	19	
100			0	18.02	17.93	17.92	19	

	16QAM	1	0	18.29	18.25	18.22	19
		1	50	17.84	17.99	18	19
		1	99	18.29	18.2	18.23	19
		50	0	17.96	17.87	17.89	19
		50	25	17.88	17.87	17.9	19
		50	50	17.93	17.95	17.94	19
		100	0	17.92	17.91	17.88	19
	64QAM	1	0	18.27	18.15	18.12	19
		1	50	17.76	17.88	17.99	19
		1	99	18.13	18.12	18.2	19
		50	0	17.85	17.7	17.74	19
		50	25	17.83	17.86	17.75	19
		50	50	17.77	17.89	17.92	19
		100	0	17.79	17.88	17.77	19

LTE Band 2 Hotspot on+sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	16.84	16.72	16.89	17.5
		1	2	17.01	17.01	15.89	17.5
		1	5	16.74	16.88	16.8	17.5
		3	0	16.59	16.6	16.7	17.5
		3	2	16.16	16.62	16.22	17.5
		3	3	16.48	16.85	16.38	17.5
		6	0	16.79	16.75	16.68	17.5
	16QAM	1	0	16.83	17.18	17.22	17.5
		1	2	16.62	16.55	16.42	17.5
		1	5	16.72	16.51	16.92	17.5
		3	0	16.86	16.72	16.46	17.5
		3	2	16.96	16.73	17.01	17.5
		3	3	16.5	16.67	17.05	17.5
		6	0	16.42	16.83	16.37	17.5
	64QAM	1	0	16.74	17.16	17.17	17.5
		1	2	16.57	16.54	16.27	17.5
		1	5	16.57	16.47	16.75	17.5
		3	0	16.69	16.57	16.35	17.5
		3	2	16.8	16.65	16.91	17.5
		3	3	16.41	16.55	16.96	17.5
		6	0	16.42	16.74	16.25	17.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK			18615	18900	19185	
		1	0	16.79	16.67	16.86	17.5
		1	7	16.46	15.79	16.7	17.5
		1	14	16.83	16.75	16.67	17.5

		8	0	16.78	16.92	16.74	17.5	
		8	4	16.74	16.73	16.8	17.5	
		8	7	16.67	16.68	16.73	17.5	
		15	0	16.95	16.69	16.66	17.5	
	16QAM	1	0	16.96	16.52	17.08	17.5	
		1	7	15.83	16.44	16.36	17.5	
		1	14	17.43	16.51	17.09	17.5	
		8	0	16.75	16.6	16.65	17.5	
		8	4	16.71	16.41	16.86	17.5	
		8	7	16.35	16.65	16.7	17.5	
	64QAM	15	0	16.73	16.7	16.71	17.5	
		1	0	16.94	16.42	17.07	17.5	
		1	7	15.76	16.38	16.29	17.5	
		1	14	17.29	16.5	16.94	17.5	
		8	0	16.64	16.51	16.49	17.5	
		8	4	16.54	16.39	16.73	17.5	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18625	18900	19175	
5MHz	QPSK	8	7	16.35	16.65	16.7	17.5	
		15	0	16.57	16.68	16.64	17.5	
		1	0	16.93	16.79	16.75	17.5	
		1	13	16.95	16.89	16.85	17.5	
		1	24	16.86	16.71	16.68	17.5	
		12	0	16.88	16.86	16.81	17.5	
		12	6	16.65	16.4	16.9	17.5	
	16QAM	12	13	16.83	16.79	16.76	17.5	
		25	0	16.87	16.85	16.7	17.5	
		1	0	17.1	17.01	17.36	17.5	
		1	13	17.09	17.16	16.99	17.5	
		1	24	17.32	17.19	17.31	17.5	
		12	0	16.74	16.72	16.76	17.5	
		12	6	16.85	16.79	16.73	17.5	
	64QAM	12	13	16.75	16.69	16.79	17.5	
		25	0	16.79	16.67	16.68	17.5	
		1	0	17.04	16.88	17.23	17.5	
		1	13	16.92	17.13	16.84	17.5	
		1	24	17.21	17.14	17.31	17.5	
		12	0	16.62	16.66	16.64	17.5	
		12	6	16.78	16.74	16.59	17.5	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18650	18900	19150	
	10MHz	QPSK	1	0	16.86	16.74	16.87	17.5
			1	25	16.62	16.16	16.81	17.5

		1	49	16.82	16.72	16.69	17.5	
		25	0	16.82	16.74	16.93	17.5	
		25	13	16.8	16.86	16.73	17.5	
		25	25	16.83	16.79	16.81	17.5	
		50	0	16.86	16.73	16.84	17.5	
	16QAM	1	0	16.97	17	17.3	17.5	
		1	25	16.41	17.23	16.94	17.5	
		1	49	17.04	17.25	17	17.5	
		25	0	16.59	16.74	16.85	17.5	
		25	13	16.7	16.75	16.51	17.5	
		25	25	16.74	16.79	16.72	17.5	
		50	0	16.76	16.74	16.76	17.5	
	64QAM	1	0	16.97	16.86	17.25	17.5	
		1	25	16.34	17.18	16.82	17.5	
		1	49	16.88	17.16	16.85	17.5	
		25	0	16.46	16.62	16.77	17.5	
		25	13	16.55	16.63	16.49	17.5	
		25	25	16.63	16.74	16.61	17.5	
		50	0	16.74	16.66	16.72	17.5	
	Bandwidth	Modulation	RB size	RB offset	Channel 18675	Channel 18900	Channel 19125	Tune up
	15MHz	QPSK	1	0	16.85	16.78	16.8	17.5
1			38	16.82	16.79	16.81	17.5	
1			74	16.76	16.72	16.75	17.5	
36			0	16.81	16.84	16.83	17.5	
36			18	16.9	16.76	16.83	17.5	
36			39	16.89	16.81	16.85	17.5	
75			0	16.75	16.79	16.86	17.5	
16QAM		1	0	17.13	16.94	17.07	17.5	
		1	38	17.4	16.39	17.4	17.5	
		1	74	16.98	17.12	17.28	17.5	
		36	0	16.87	16.76	16.74	17.5	
		36	18	16.84	16.74	16.72	17.5	
		36	39	16.83	16.64	16.77	17.5	
		75	0	16.77	16.68	16.75	17.5	
64QAM		1	0	16.96	16.93	17	17.5	
		1	38	17.23	16.25	17.39	17.5	
		1	74	16.92	17.04	17.16	17.5	
		36	0	16.83	16.65	16.59	17.5	
		36	18	16.77	16.7	16.55	17.5	
		36	39	16.75	16.56	16.69	17.5	
		75	0	16.72	16.6	16.59	17.5	
Bandwidth	Modulation	RB size	RB offset	Channel 18700	Channel 18900	Channel 19100	Tune up	
20MHz	QPSK	1	0	16.97	16.86	16.96	17.5	

		1	50	16.56	16.73	16.74	17.5
		1	99	16.79	16.93	16.87	17.5
		50	0	16.93	16.79	16.75	17.5
		50	25	16.77	16.73	16.79	17.5
		50	50	16.82	16.81	16.84	17.5
		100	0	16.8	16.78	16.84	17.5
	16QAM	1	0	17.2	16.93	17.5	17.5
		1	50	17.22	17.07	16.9	17.5
		1	99	17.12	17.35	16.93	17.5
		50	0	16.82	16.84	16.75	17.5
		50	25	16.74	16.72	16.74	17.5
		50	50	16.78	16.72	16.75	17.5
	64QAM	100	0	16.7	16.68	16.75	17.5
		1	0	17.05	16.88	17.45	17.5
		1	50	17.06	17.04	16.88	17.5
		1	99	17.09	17.19	16.77	17.5
		50	0	16.64	16.71	16.68	17.5
		50	25	16.58	16.71	16.6	17.5
		50	50	16.76	16.72	16.58	17.5
	100	0	16.61	16.63	16.62	17.5	

LTE Band 2 Body Scene(0mm SAR sensor on Level D1&D4&D5)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	21.69	21.78	21.61	22.5
		1	2	20.98	20.7	22.02	22.5
		1	5	21.73	21.66	21.6	22.5
		3	0	21.7	21.79	21.67	22.5
		3	2	21.86	21.7	21.12	22.5
		3	3	21.72	21.49	21.55	22.5
		6	0	21.65	21.87	21.67	22.5
	16QAM	1	0	21.79	21.94	21.77	22.5
		1	2	21.36	21.98	22.08	22.5
		1	5	21.91	21.46	22.16	22.5
		3	0	21.65	21.61	21.6	22.5
		3	2	21.11	21.3	21.81	22.5
		3	3	21.55	21.72	21.69	22.5
		6	0	21.18	21.16	20.53	22.5
	64QAM	1	0	21.29	21.51	21.33	22
		1	2	20.85	21.49	21.6	22
		1	5	21.48	20.97	21.65	22
		3	0	21.22	21.18	21.16	22
		3	2	20.66	20.8	21.35	22
		3	3	21.06	21.25	21.17	22

Bandwidth	Modulation	6	0	19.71	19.65	19.04	21	
		RB size	RB offset	Channel 18615	Channel 18900	Channel 19185	Tune up	
3MHz	QPSK	1	0	21.82	21.6	21.66	22.5	
		1	7	20.87	21.78	20.66	22.5	
		1	14	21.82	21.62	21.62	22.5	
		8	0	21.58	21.57	21.59	22.5	
		8	4	21.46	21.67	20.95	22.5	
		8	7	21.51	21.17	21.68	22.5	
		15	0	21.54	21.64	21.52	22.5	
	16QAM	1	0	22.06	21.92	22.04	22.5	
		1	7	22.3	22.11	22.31	22.5	
		1	14	21.83	22.05	21.83	22.5	
		8	0	21.21	20.97	21.11	22.5	
		8	4	20.98	21.22	21	22.5	
		8	7	21.14	21.11	20.98	22.5	
		15	0	21.18	21.03	21.17	22.5	
	64QAM	1	0	21.54	21.43	21.53	22	
		1	7	21.77	21.63	21.78	22	
		1	14	21.36	21.52	21.39	22	
		8	0	20.75	20.46	20.58	21	
		8	4	20.47	20.72	20.46	21	
		8	7	20.64	20.63	20.46	21	
		15	0	19.71	19.58	19.75	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18625	18900	19175	
	5MHz	QPSK	1	0	21.74	21.67	21.65	22.5
1			13	21.78	21.64	21.71	22.5	
1			24	21.82	21.76	21.64	22.5	
12			0	21.71	21.75	21.66	22.5	
12			6	21.6	21.67	21.74	22.5	
12			13	21.67	21.75	21.69	22.5	
25			0	21.66	21.66	21.7	22.5	
16QAM		1	0	21.85	21.63	21.93	22.5	
		1	13	21.95	22.08	21.98	22.5	
		1	24	21.95	21.83	21.74	22.5	
		12	0	21.19	21.09	21.22	22.5	
		12	6	20.99	21.17	21.1	22.5	
		12	13	21.13	21.17	21.08	22.5	
		25	0	21.03	21.15	21.02	22.5	
64QAM		1	0	21.32	21.19	21.39	22	
		1	13	21.41	21.55	21.49	22	
		1	24	21.42	21.4	21.23	22	
		12	0	20.69	20.63	20.75	21	
		12	6	20.5	20.7	20.64	21	

Bandwidth	Modulation	12	13	20.63	20.71	20.58	21
		25	0	19.59	19.74	19.61	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	21.67	21.5	21.66	22.5
		1	25	21.56	21.02	21.06	22.5
		1	49	21.78	21.66	21.65	22.5
		25	0	21.67	21.65	21.71	22.5
		25	13	21.73	21.68	21.76	22.5
		25	25	21.62	21.64	21.69	22.5
		50	0	21.65	21.68	21.74	22.5
	16QAM	1	0	22.21	21.86	22.1	22.5
		1	25	21.65	21.3	22.07	22.5
		1	49	21.62	22	22.14	22.5
		25	0	21.16	21.04	21.19	22.5
		25	13	21.08	21.18	21.06	22.5
		25	25	21.17	21.12	21.22	22.5
		50	0	21.13	21.07	21.22	22.5
	64QAM	1	0	21.77	21.32	21.67	22
		1	25	21.15	20.83	21.55	22
		1	49	21.2	21.52	21.65	22
		25	0	20.72	20.55	20.76	21
		25	13	20.66	20.69	20.63	21
		25	25	20.69	20.67	20.78	21
		50	0	19.62	19.66	19.79	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	1	0	21.59	21.68	21.59	22.5
		1	38	21.65	21.72	21.66	22.5
		1	74	21.7	21.74	21.66	22.5
		36	0	21.78	21.67	21.8	22.5
		36	18	21.71	21.7	21.78	22.5
		36	39	21.8	21.7	21.77	22.5
		75	0	21.76	21.68	21.79	22.5
	16QAM	1	0	21.52	22.3	21.99	22.5
		1	38	21.99	22.23	21.91	22.5
		1	74	22.11	22.09	22.1	22.5
		36	0	21.23	21.17	21.28	22.5
		36	18	21.17	21.09	21.18	22.5
		36	39	21.14	21.26	21.24	22.5
		75	0	21.13	21.1	21.14	22.5
	64QAM	1	0	21.03	21.84	21.51	22
		1	38	21.46	21.7	21.49	22
		1	74	21.64	21.61	21.57	22
		36	0	20.77	20.65	20.78	21

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
		18700	18900	19100			
20MHz	QPSK	36	18	20.74	20.65	20.72	21
		36	39	20.65	20.81	20.75	21
		75	0	19.64	19.67	19.73	21
	QPSK	1	0	21.33	21.26	21.3	22.5
		1	50	20.96	21.02	21.03	22.5
		1	99	21.27	21.24	21.32	22.5
		50	0	21.23	21.17	21.21	22.5
		50	25	21.15	21.15	21.22	22.5
		50	50	21.2	21.22	21.2	22.5
	16QAM	100	0	21.19	21.18	21.19	22.5
		1	0	21.61	21.53	21.64	22.5
		1	50	21.38	21.31	21.42	22.5
		1	99	21.46	21.54	21.52	22.5
		50	0	20.63	20.55	20.63	22.5
		50	25	20.56	20.6	20.63	22.5
	64QAM	50	50	20.68	20.66	20.68	22.5
		100	0	20.6	20.61	20.65	22.5
		1	0	21.14	21.01	21.12	22
		1	50	20.88	20.87	20.99	22
		1	99	20.93	21.02	21.09	22
		50	0	20.16	20.1	20.21	21
	64QAM	50	25	20.12	20.08	20.18	21
		50	50	20.16	20.21	20.22	21
		100	0	19.14	19.17	19.2	21

LTE Band 4 Full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	23.05	23.06	23.02	24
		1	2	22.49	22.35	22.29	24
		1	5	23.04	23.04	22.98	24
		3	0	22.83	22.91	22.94	24
		3	2	22.92	22.81	23.09	24
		3	3	22.86	22.97	22.97	24
		6	0	21.47	21.43	21.44	23
	16QAM	1	0	21.62	21.85	21.73	23
		1	2	21.44	21.65	21.62	23
		1	5	21.66	21.79	21.7	23
		3	0	21.42	21.53	21.45	23
		3	2	21.41	21.48	21.4	23
		3	3	21.48	21.51	21.44	23
		6	0	20.55	20.52	20.44	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
	64QAM	1	0	20.67	20.9	20.81	22
		1	2	20.49	20.68	20.72	22
		1	5	20.68	20.82	20.77	22
		3	0	20.48	20.54	20.47	22
		3	2	20.42	20.54	20.48	22
		3	3	20.47	20.54	20.52	22
		6	0	19.53	19.61	19.47	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	23.12	23.06	23.03	24
		1	7	22.55	22.76	22.38	24
		1	14	23	23.11	23.04	24
		8	0	21.48	21.54	21.49	23
		8	4	21.39	21.51	21.45	23
		8	7	21.57	21.54	21.46	23
		15	0	21.5	21.56	21.52	23
	16QAM	1	0	21.84	21.91	21.85	23
		1	7	21.42	21.59	21.22	23
		1	14	21.81	21.77	21.79	23
		8	0	20.46	20.47	20.39	22
		8	4	20.37	20.39	20.31	22
		8	7	20.42	20.45	20.41	22
		15	0	20.5	20.51	20.49	22
	64QAM	1	0	20.87	20.92	20.91	22
		1	7	20.52	20.6	20.27	22
		1	14	20.8	20.84	20.81	22
		8	0	19.45	19.54	19.4	21
		8	4	19.44	19.47	19.32	21
		8	7	19.45	19.49	19.5	21
		15	0	19.48	19.6	19.51	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
5MHz	QPSK	1	0	23.24	23.1	23.12	24
		1	13	23.04	23.03	23.09	24
		1	24	23.14	23.04	22.97	24
		12	0	21.63	21.61	21.58	23
		12	6	21.51	21.58	21.55	23
		12	13	21.57	21.57	21.58	23
		25	0	21.56	21.54	21.5	23
	16QAM	1	0	21.78	21.88	21.81	23
		1	13	21.94	22.03	21.85	23
		1	24	21.88	21.84	21.79	23
		12	0	20.56	20.53	20.54	22
		12	6	20.5	20.53	20.47	22
		12	13	20.54	20.53	20.51	22

		25	0	20.47	20.5	20.49	22	
	64QAM	1	0	20.76	20.9	20.87	22	
		1	13	20.97	21.04	20.87	22	
		1	24	20.86	20.83	20.83	22	
		12	0	19.56	19.54	19.56	21	
		12	6	19.49	19.62	19.51	21	
		12	13	19.57	19.52	19.51	21	
		25	0	19.53	19.58	19.5	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20000	20175	20350		
10MHz	QPSK	1	0	23.11	23.1	23.1	24	
		1	25	22.96	22.95	22.92	24	
		1	49	23.03	23.08	23.04	24	
		25	0	21.56	21.59	21.61	23	
		25	13	21.53	21.55	21.54	23	
		25	25	21.57	21.56	21.52	23	
		50	0	21.53	21.56	21.55	23	
	16QAM	1	0	21.86	21.8	21.87	23	
		1	25	21.78	21.69	21.61	23	
		1	49	21.83	21.75	21.76	23	
		25	0	20.49	20.54	20.52	22	
		25	13	20.43	20.47	20.49	22	
		25	25	20.46	20.47	20.51	22	
		50	0	20.48	20.5	20.46	22	
	64QAM	1	0	20.92	20.79	20.94	22	
		1	25	20.87	20.75	20.6	22	
		1	49	20.86	20.82	20.81	22	
		25	0	19.53	19.62	19.54	21	
		25	13	19.46	19.49	19.52	21	
		25	25	19.51	19.49	19.57	21	
		50	0	19.53	19.51	19.5	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20025	20175	20325	
	15MHz	QPSK	1	0	23.04	23.08	23.05	24
			1	38	23.02	23.1	23.06	24
			1	74	23	23	22.94	24
			36	0	21.61	21.64	21.62	23
			36	18	21.55	21.6	21.57	23
36			39	21.55	21.62	21.56	23	
75			0	21.51	21.53	21.54	23	
16QAM		1	0	21.86	21.92	21.85	23	
		1	38	21.82	21.9	21.85	23	
		1	74	21.84	21.82	21.74	23	
		36	0	20.57	20.62	20.53	22	
		36	18	20.48	20.54	20.54	22	

	64QAM	36	39	20.48	20.51	20.51	22
		75	0	20.5	20.51	20.48	22
		1	0	20.95	21	20.9	22
		1	38	20.81	20.92	20.84	22
		1	74	20.94	20.89	20.84	22
		36	0	19.61	19.61	19.6	21
		36	18	19.58	19.56	19.58	21
		36	39	19.51	19.51	19.49	21
		75	0	19.54	19.55	19.48	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20050	20175	20300	
20MHz	QPSK	1	0	23.14	23.2	23.14	24
		1	50	23.01	23.02	23.03	24
		1	99	23.07	23.02	23.04	24
		50	0	21.56	21.6	21.59	23
		50	25	21.54	21.58	21.54	23
		50	50	21.57	21.56	21.53	23
		100	0	21.59	21.57	21.58	23
	16QAM	1	0	22.1	21.99	22.05	23
		1	50	21.89	21.46	21.66	23
		1	99	21.93	21.84	21.89	23
		50	0	20.49	20.54	20.57	22
		50	25	20.49	20.5	20.51	22
		50	50	20.47	20.43	20.49	22
		100	0	20.51	20.5	20.49	22
	64QAM	1	0	21.12	21.04	21.08	22
		1	50	20.96	20.53	20.73	22
		1	99	20.91	20.85	20.91	22
		50	0	19.57	19.55	19.65	21
		50	25	19.49	19.56	19.49	21
		50	50	19.5	19.5	19.56	21
		100	0	19.5	19.48	19.51	21

LTE Band 4 Hotspot on+sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	17.57	17.57	17.53	18.5
		1	2	17.14	16.89	17.02	18.5
		1	5	17.52	17.54	17.55	18.5
		3	0	17.46	17.51	17.5	18.5
		3	2	17.48	17.52	17.56	18.5
		3	3	17.37	17.43	17.43	18.5
		6	0	17.41	17.48	17.37	18.5
	16QAM	1	0	17.67	17.78	17.8	18.5

		1	2	17.47	17.57	17.46	18.5	
		1	5	17.71	17.87	17.7	18.5	
		3	0	17.53	17.48	17.4	18.5	
		3	2	17.43	17.52	17.39	18.5	
		3	3	17.53	17.42	17.46	18.5	
		6	0	17.39	17.47	17.46	18.5	
	64QAM	1	0	17.54	17.75	17.68	18.5	
		1	2	17.32	17.49	17.44	18.5	
		1	5	17.69	17.69	17.65	18.5	
		3	0	17.51	17.4	17.29	18.5	
		3	2	17.32	17.36	17.25	18.5	
		3	3	17.38	17.33	17.34	18.5	
	6	0	17.28	17.37	17.44	18.5		
	Bandwidth	Modulation	RB size	RB offset	Channel 19965	Channel 20175	Channel 20385	Tune up
3MHz	QPSK	1	0	17.6	17.56	17.54	18.5	
		1	7	16.76	16.9	17.02	18.5	
		1	14	17.53	17.52	17.52	18.5	
		8	0	17.46	17.5	17.45	18.5	
		8	4	17.51	17.47	17.42	18.5	
		8	7	17.51	17.48	17.49	18.5	
	15	0	17.54	17.56	17.53	18.5		
	16QAM	1	0	17.89	17.98	17.82	18.5	
		1	7	17.25	17.53	17.31	18.5	
		1	14	17.88	17.94	17.87	18.5	
		8	0	17.45	17.41	17.5	18.5	
		8	4	17.44	17.48	17.51	18.5	
		8	7	17.44	17.46	17.4	18.5	
	15	0	17.55	17.52	17.49	18.5		
	64QAM	1	0	17.87	17.96	17.8	18.5	
		1	7	17.23	17.5	17.18	18.5	
		1	14	17.72	17.78	17.74	18.5	
		8	0	17.28	17.36	17.32	18.5	
		8	4	17.42	17.35	17.5	18.5	
		8	7	17.35	17.3	17.26	18.5	
	15	0	17.38	17.35	17.32	18.5		
	Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
	5MHz	QPSK	1	0	17.59	17.57	17.49	18.5
			1	13	17.57	17.54	17.57	18.5
1			24	17.56	17.55	17.55	18.5	
12			0	17.63	17.61	17.6	18.5	
12			6	17.55	17.53	17.49	18.5	
12			13	17.56	17.57	17.53	18.5	
25			0	17.54	17.55	17.52	18.5	

	16QAM	1	0	17.86	17.87	17.82	18.5
		1	13	17.87	17.88	17.92	18.5
		1	24	17.84	17.87	17.81	18.5
		12	0	17.55	17.58	17.5	18.5
		12	6	17.48	17.5	17.46	18.5
		12	13	17.51	17.54	17.49	18.5
		25	0	17.49	17.5	17.47	18.5
	64QAM	1	0	17.7	17.71	17.79	18.5
		1	13	17.83	17.84	17.77	18.5
		1	24	17.79	17.69	17.72	18.5
		12	0	17.38	17.44	17.38	18.5
		12	6	17.32	17.37	17.45	18.5
		12	13	17.4	17.44	17.4	18.5
		25	0	17.46	17.39	17.4	18.5
Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
10MHz	QPSK	1	0	17.6	17.59	17.61	18.5
		1	25	17.4	17.25	17.29	18.5
		1	49	17.53	17.56	17.5	18.5
		25	0	17.56	17.6	17.6	18.5
		25	13	17.55	17.54	17.53	18.5
		25	25	17.53	17.54	17.52	18.5
		50	0	17.52	17.57	17.53	18.5
	16QAM	1	0	17.74	17.92	17.77	18.5
		1	25	17.59	17.78	17.65	18.5
		1	49	17.82	17.86	17.81	18.5
		25	0	17.45	17.55	17.56	18.5
		25	13	17.45	17.53	17.49	18.5
		25	25	17.48	17.49	17.45	18.5
		50	0	17.47	17.51	17.46	18.5
	64QAM	1	0	17.62	17.79	17.75	18.5
		1	25	17.43	17.72	17.61	18.5
		1	49	17.7	17.85	17.75	18.5
		25	0	17.36	17.45	17.51	18.5
		25	13	17.34	17.39	17.49	18.5
		25	25	17.31	17.46	17.41	18.5
		50	0	17.35	17.46	17.32	18.5
Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up
15MHz	QPSK	1	0	17.54	17.55	17.58	18.5
		1	38	17.46	17.57	17.57	18.5
		1	74	17.5	17.44	17.47	18.5
		36	0	17.57	17.64	17.59	18.5
		36	18	17.54	17.6	17.58	18.5
		36	39	17.56	17.59	17.57	18.5

	16QAM	75	0	17.57	17.57	17.59	18.5
		1	0	17.7	17.86	17.79	18.5
		1	38	17.81	17.86	17.94	18.5
		1	74	17.79	17.81	17.82	18.5
		36	0	17.54	17.6	17.55	18.5
		36	18	17.5	17.5	17.5	18.5
		36	39	17.47	17.56	17.49	18.5
	64QAM	75	0	17.48	17.46	17.51	18.5
		1	0	17.57	17.8	17.68	18.5
		1	38	17.68	17.68	17.8	18.5
		1	74	17.78	17.68	17.8	18.5
		36	0	17.52	17.59	17.42	18.5
		36	18	17.48	17.4	17.45	18.5
		36	39	17.43	17.51	17.39	18.5
		75	0	17.47	17.3	17.38	18.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20050	20175	20300	
20MHz	QPSK	1	0	17.68	17.68	17.65	18.5
		1	50	17.23	17.32	17.56	18.5
		1	99	17.57	17.52	17.53	18.5
		50	0	17.6	17.62	17.63	18.5
		50	25	17.53	17.56	17.53	18.5
		50	50	17.59	17.55	17.55	18.5
		100	0	17.56	17.56	17.58	18.5
	16QAM	1	0	17.82	18.09	18.07	18.5
		1	50	17.65	17.99	17.7	18.5
		1	99	17.93	17.79	17.88	18.5
		50	0	17.51	17.63	17.53	18.5
		50	25	17.46	17.46	17.49	18.5
		50	50	17.45	17.44	17.46	18.5
		100	0	17.48	17.46	17.5	18.5
	64QAM	1	0	17.72	17.99	17.92	18.5
		1	50	17.51	17.91	17.57	18.5
		1	99	17.79	17.67	17.88	18.5
		50	0	17.33	17.5	17.53	18.5
		50	25	17.31	17.45	17.39	18.5
		50	50	17.31	17.43	17.38	18.5
		100	0	17.32	17.39	17.42	18.5

LTE Band 4 Hotspot on+sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	15.38	15.57	15.38	16.5
		1	2	14.77	14.82	15.41	16.5

		1	5	15.29	15.47	15.38	16.5
		3	0	15.26	15.12	15.52	16.5
		3	2	15.41	15.27	15.3	16.5
		3	3	15.09	15.48	15.18	16.5
		6	0	15.33	15.27	15.32	16.5
	16QAM	1	0	15.36	15.76	15.96	16.5
		1	2	15.88	14.26	15.47	16.5
		1	5	15.55	15.41	15.11	16.5
		3	0	15.44	15.67	15.11	16.5
		3	2	15.43	15.31	15.27	16.5
		3	3	15.07	15.52	15.14	16.5
	64QAM	6	0	15.33	15.51	15.63	16.5
		1	0	15.23	15.7	15.85	16.5
		1	2	15.84	14.18	15.42	16.5
		1	5	15.48	15.25	14.93	16.5
		3	0	15.3	15.52	15.01	16.5
		3	2	15.39	15.22	15.11	16.5
		3	3	15.05	15.44	15.09	16.5
6	0	15.23	15.35	15.45	16.5		
Bandwidth	Modulation	RB size	RB offset	Channel 19965	Channel 20175	Channel 20385	Tune up
3MHz	QPSK	1	0	15.65	15.44	15.58	16.5
		1	7	15.91	15.29	14.12	16.5
		1	14	15.4	15.36	15.25	16.5
		8	0	15.49	15.3	15.53	16.5
		8	4	15.51	15.39	15.14	16.5
		8	7	15.05	15.42	15.31	16.5
		15	0	15.55	15.33	15.5	16.5
	16QAM	1	0	16.15	15.75	15.79	16.5
		1	7	15.27	15.47	14.92	16.5
		1	14	15.1	15.91	15.6	16.5
		8	0	15.53	15.49	15.51	16.5
		8	4	15.4	15.37	15.25	16.5
		8	7	15.06	15.38	14.94	16.5
		15	0	15.35	15.39	15.45	16.5
	64QAM	1	0	16.11	15.68	15.72	16.5
		1	7	15.22	15.43	14.75	16.5
		1	14	15.02	15.73	15.44	16.5
		8	0	15.52	15.4	15.45	16.5
		8	4	15.38	15.29	15.16	16.5
		8	7	14.89	15.35	14.83	16.5
		15	0	15.29	15.24	15.28	16.5
Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
5MHz	QPSK	1	0	15.83	15.47	15.43	16.5

		1	13	15.42	15.44	15.53	16.5	
		1	24	15.35	15.47	15.39	16.5	
		12	0	15.19	15.55	15.28	16.5	
		12	6	15.35	15.41	15.29	16.5	
		12	13	15.43	15.43	15.46	16.5	
		25	0	15.43	15.52	15.35	16.5	
	16QAM	1	0	16.01	16.2	15.79	16.5	
		1	13	15.47	15.87	15.79	16.5	
		1	24	15.83	15.76	15.67	16.5	
		12	0	15.22	15.54	15.36	16.5	
		12	6	15.26	15.33	15.33	16.5	
		12	13	15.28	15.5	15.18	16.5	
	64QAM	25	0	15.32	15.42	15.16	16.5	
		1	0	15.94	16.18	15.7	16.5	
		1	13	15.43	15.83	15.69	16.5	
		1	24	15.71	15.65	15.64	16.5	
		12	0	15.15	15.48	15.24	16.5	
		12	6	15.13	15.19	15.22	16.5	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20000	20175	20350	
	10MHz	QPSK	1	0	15.74	15.3	15.59	16.5
1			25	14.55	15.06	15.2	16.5	
1			49	15.44	15.23	15.48	16.5	
25			0	15.45	15.51	15.42	16.5	
25			13	15.28	15.48	15.37	16.5	
25			25	15.5	15.38	15.33	16.5	
50			0	15.36	15.39	15.37	16.5	
16QAM		1	0	14.88	15.52	14.99	16.5	
		1	25	16.48	15.54	15.37	16.5	
		1	49	15.84	15.62	15.76	16.5	
		25	0	15.34	15.41	15.23	16.5	
		25	13	15.35	15.37	15.27	16.5	
		25	25	15.39	15.33	15.34	16.5	
		50	0	15.37	15.43	15.24	16.5	
64QAM		1	0	14.71	15.35	14.86	16.5	
		1	25	16.36	15.45	15.3	16.5	
		1	49	15.84	15.51	15.65	16.5	
		25	0	15.23	15.39	15.19	16.5	
		25	13	15.26	15.37	15.15	16.5	
		25	25	15.24	15.28	15.22	16.5	
		50	0	15.27	15.28	15.23	16.5	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20025	20175	20325		

15MHz	QPSK	1	0	15.28	15.2	15.51	16.5
		1	38	15.44	15.49	15.48	16.5
		1	74	15.61	15.44	15.37	16.5
		36	0	15.52	15.45	15.41	16.5
		36	18	15.36	15.41	15.43	16.5
		36	39	15.28	15.42	15.3	16.5
		75	0	15.47	15.44	15.43	16.5
	16QAM	1	0	15.71	15.61	15.69	16.5
		1	38	15.95	16.07	15.73	16.5
		1	74	15.61	15.99	15.68	16.5
		36	0	15.4	15.42	15.37	16.5
		36	18	15.4	15.42	15.36	16.5
		36	39	15.39	15.28	15.24	16.5
		75	0	15.43	15.36	15.18	16.5
	64QAM	1	0	15.61	15.49	15.61	16.5
		1	38	15.95	16.05	15.64	16.5
		1	74	15.5	15.9	15.56	16.5
		36	0	15.24	15.29	15.34	16.5
		36	18	15.4	15.38	15.26	16.5
		36	39	15.33	15.18	15.21	16.5
		75	0	15.36	15.31	15.05	16.5
Bandwidth	Modulation	RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
20MHz	QPSK	1	0	15.19	15.73	15.53	16.5
		1	50	14.85	14.58	15.37	16.5
		1	99	15.45	15.45	15.37	16.5
		50	0	15.64	15.45	15.41	16.5
		50	25	15.44	15.38	15.36	16.5
		50	50	15.46	15.35	15.28	16.5
		100	0	15.44	15.37	15.32	16.5
	16QAM	1	0	15.53	16.06	15.6	16.5
		1	50	15.17	15.2	15.02	16.5
		1	99	15.71	15.03	15.54	16.5
		50	0	15.29	15.52	15.3	16.5
		50	25	15.23	15.34	15.29	16.5
		50	50	15.28	15.33	15.29	16.5
		100	0	15.39	15.34	15.33	16.5
	64QAM	1	0	15.48	15.98	15.59	16.5
		1	50	15.08	15.18	14.98	16.5
		1	99	15.67	14.89	15.53	16.5
		50	0	15.21	15.42	15.23	16.5
		50	25	15.06	15.29	15.2	16.5
		50	50	15.13	15.27	15.28	16.5
		100	0	15.37	15.26	15.17	16.5

LTE Band 4 Body Scene(0mm SAR sensor on Level D1&D4&D5)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	20.79	20.82	20.84	22
		1	2	20.64	19.75	20.25	22
		1	5	20.83	20.74	20.65	22
		3	0	20.79	20.66	20.67	22
		3	2	21.09	20.46	20.62	22
		3	3	20.36	20.81	20.6	22
		6	0	20.57	20.72	20.49	22
	16QAM	1	0	21.16	21.08	20.73	22
		1	2	21.1	20.72	20.46	22
		1	5	21.39	20.94	21.33	22
		3	0	20.6	20.97	20.47	22
		3	2	20.44	20.04	20.81	22
		3	3	20.84	20.91	20.42	22
		6	0	20.35	20.2	20.14	22
	64QAM	1	0	21.15	21.05	20.7	22
		1	2	20.98	20.71	20.35	22
		1	5	21.33	20.91	21.3	22
		3	0	20.5	20.83	20.35	22
		3	2	20.4	20.02	20.76	22
		3	3	20.74	20.9	20.32	22
		6	0	19.44	19.26	19.25	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	20.7	20.89	20.78	22
		1	7	20.09	21.11	19.76	22
		1	14	20.69	20.78	20.58	22
		8	0	20.38	20.81	20.51	22
		8	4	20.78	20.89	20.49	22
		8	7	20.93	20.73	20.37	22
		15	0	20.77	20.51	20.38	22
	16QAM	1	0	20.82	21.07	21.34	22
		1	7	21.36	21.31	21.45	22
		1	14	20.9	20.77	20.91	22
		8	0	20.5	20.44	20.08	22
		8	4	20.19	20.12	20.04	22
		8	7	20.15	20.37	20.11	22
		15	0	20.34	20.21	20.23	22
	64QAM	1	0	20.77	21.02	21.3	22
		1	7	21.34	21.28	21.44	22
		1	14	20.89	20.64	20.82	22
		8	0	19.56	19.41	19.13	21

Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
		8	4	19.22	19.19	19.04	
		8	7	19.13	19.42	19.17	21
		15	0	19.37	19.25	19.28	21
Bandwidth	Modulation	RB size	RB offset	Channel 19975	Channel 20175	Channel 20375	Tune up
		1	0	20.78	20.84	20.64	
5MHz	QPSK	1	13	20.81	20.89	20.76	22
		1	24	20.77	20.84	20.6	22
		12	0	20.97	20.94	20.81	22
		12	6	20.69	21.06	20.83	22
		12	13	20.83	20.86	20.8	22
		25	0	20.87	20.82	20.85	22
		25	0	20.87	21.32	21.15	22
	16QAM	1	13	21.28	21.43	21.11	22
		1	24	20.98	20.98	20.75	22
		12	0	20.31	20.31	20.21	22
		12	6	20.2	20.22	20.28	22
		12	13	20.5	20.32	20.25	22
		25	0	20.3	20.32	20.18	22
		25	0	20.3	20.32	20.18	22
	64QAM	1	0	20.81	21.23	21.14	22
		1	13	21.14	21.32	21.1	22
		1	24	20.98	20.87	20.74	22
		12	0	19.31	19.39	19.18	21
		12	6	19.23	19.3	19.29	21
		12	13	19.57	19.32	19.31	21
		25	0	19.42	19.32	19.16	21
Bandwidth	Modulation	RB size	RB offset	Channel 20000	Channel 20175	Channel 20350	Tune up
		1	0	20.86	20.86	20.83	
10MHz	QPSK	1	25	20.85	19.96	20.33	22
		1	49	20.67	20.83	20.57	22
		25	0	20.77	20.9	20.76	22
		25	13	20.82	20.73	20.69	22
		25	25	20.89	20.75	20.63	22
		50	0	20.79	20.76	20.69	22
		50	0	20.79	20.76	20.69	22
	16QAM	1	0	20.55	21.12	21.2	22
		1	25	21.21	20.36	21.01	22
		1	49	21.28	21.1	20.83	22
		25	0	20.21	20.24	20.2	22
		25	13	20.17	20.1	19.97	22
		25	25	20.27	20.18	20.15	22
		50	0	20.23	20.14	20.13	22
	64QAM	1	0	20.5	21.11	21.12	22
		1	25	21.14	20.29	21	22
		1	49	21.25	20.97	20.76	22

Bandwidth	Modulation	RB size	RB offset	Channel 20025	Channel 20175	Channel 20325	Tune up	
		25	0	19.31	19.33	19.23		21
		25	13	19.17	19.18	19.01	21	
		25	25	19.38	19.23	19.25	21	
		50	0	19.24	19.23	19.18	21	
15MHz	QPSK	1	0	20.87	20.74	20.74	22	
		1	38	20.73	20.79	20.68	22	
		1	74	20.82	20.68	20.66	22	
		36	0	20.88	20.82	20.82	22	
		36	18	20.79	20.76	20.72	22	
		36	39	20.82	20.73	20.71	22	
		75	0	20.84	20.71	20.74	22	
	16QAM	1	0	21.38	21.15	21.18	22	
		1	38	21.04	21.25	21.16	22	
		1	74	21.24	21.16	21.06	22	
		36	0	20.25	20.23	20.29	22	
		36	18	20.28	20.22	20.2	22	
		36	39	20.19	20.21	20.07	22	
		75	0	20.23	20.23	20.11	22	
	64QAM	1	0	21.24	21.11	21.1	22	
		1	38	20.97	21.24	21.04	22	
		1	74	21.13	21.07	20.95	22	
		36	0	19.23	19.25	19.36	21	
		36	18	19.31	19.21	19.18	21	
		36	39	19.29	19.23	19.16	21	
		75	0	19.32	19.21	19.1	21	
	Bandwidth	Modulation	RB size	RB offset	Channel 20050	Channel 20175	Channel 20300	Tune up
			20MHz					
	20MHz	QPSK	1	0	21.07	21.06	21.06	22
1			50	20.31	20.74	20.87	22	
1			99	20.89	20.89	20.83	22	
50			0	21.09	21.06	20.94	22	
50			25	20.82	20.92	20.81	22	
50			50	20.82	20.82	20.77	22	
100			0	20.97	20.92	20.87	22	
16QAM		1	0	21.37	21.3	21.27	22	
		1	50	20.78	20.81	20.67	22	
		1	99	21.41	21.02	21.01	22	
		50	0	20.48	20.4	20.25	22	
		50	25	20.19	20.32	20.15	22	
		50	50	20.19	20.34	20.24	22	
		100	0	20.32	20.22	20.2	22	
64QAM		1	0	21.36	21.28	21.21	22	
		1	50	20.66	20.72	20.58	22	

		1	99	21.37	20.92	20.98	22
		50	0	19.6	19.41	19.27	21
		50	25	19.28	19.38	19.2	21
		50	50	19.19	19.37	19.29	21
		100	0	19.31	19.34	19.31	21

LTE Band 5 Full power				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20407	20525	20643		
1.4MHz	QPSK	1	0	23.21	23.19	23.19	24	
		1	2	23.01	22.78	22.81	24	
		1	5	23.19	23.19	23.16	24	
		3	0	22.95	23.07	23	24	
		3	2	22.97	22.77	22.94	24	
		3	3	23.09	23.12	23.03	24	
	16QAM	6	0	22.13	22.05	22.16	23	
		1	0	22.43	22.45	22.31	23	
		1	2	22.12	22.25	22.15	23	
		1	5	22.42	22.38	22.42	23	
		3	0	22.12	22.11	22.17	23	
		3	2	22.25	21.85	22.15	23	
	64QAM	3	3	22.07	22.13	22.11	23	
		6	0	21.09	21.08	21.19	22	
		1	0	21.29	21.28	21.22	22	
		1	2	21.04	20.86	20.83	22	
		1	5	21.22	21.25	21.16	22	
		3	0	21.05	21.09	21.03	22	
	3MHz	QPSK	3	2	20.98	20.8	21	22
			3	3	21.18	21.15	21.06	22
			6	0	20.14	20.07	20.22	21
			1	0	23.18	23.17	23.25	24
			1	7	22.84	23.09	23.17	24
			1	14	23.22	23.18	23.19	24
16QAM		8	0	22.14	22.1	22.13	23	
		8	4	22.08	22.11	22.09	23	
		8	7	22.09	22.15	22.13	23	
		15	0	22.16	22.16	22.21	23	
		1	0	22.38	22.32	22.39	23	
		1	7	22.26	22.09	22.05	23	
		1	14	22.35	22.45	22.28	23	
		8	0	20.99	21.01	20.89	22	

	64QAM	8	4	21.11	21.07	21.08	22
		8	7	21.13	21.13	21.03	22
		15	0	21.07	21.14	21.07	22
		1	0	21.18	21.21	21.33	22
		1	7	20.87	21.15	21.19	22
		1	14	21.28	21.21	21.25	22
		8	0	20.14	20.18	20.2	21
		8	4	20.17	20.14	20.09	21
		8	7	20.11	20.23	20.17	21
		15	0	20.21	20.22	20.29	21
Bandwidth	Modulation	RB size	RB offset	Channel 20425	Channel 20525	Channel 20625	Tune up
5MHz	QPSK	1	0	23.18	23.21	23.29	24
		1	13	23.23	23.23	23.25	24
		1	24	23.19	23.16	23.19	24
		12	0	22.24	22.2	22.25	23
		12	6	22.12	22.09	22.16	23
		12	13	22.22	22.24	22.23	23
		25	0	22.18	22.19	22.14	23
	16QAM	1	0	22.44	22.37	22.35	23
		1	13	22.42	22.41	22.33	23
		1	24	22.36	22.33	22.38	23
		12	0	21.15	21.11	21.17	22
		12	6	21.06	21.09	21.14	22
		12	13	21.13	21.14	21.15	22
		25	0	21.08	21.11	21.12	22
	64QAM	1	0	21.28	21.29	21.35	22
		1	13	21.29	21.24	21.26	22
		1	24	21.21	21.22	21.26	22
		12	0	20.31	20.27	20.33	21
12		6	20.18	20.12	20.22	21	
12		13	20.25	20.33	20.28	21	
25		0	20.22	20.23	20.22	21	
Bandwidth	Modulation	RB size	RB offset	Channel 20450	Channel 20525	Channel 20600	Tune up
10MHz	QPSK	1	0	23.31	23.29	23.25	24
		1	25	23.09	22.92	23	24
		1	49	23.3	23.24	23.21	24
		25	0	22.25	22.24	22.23	23
		25	13	22.15	22.22	22.2	23
		25	25	22.22	22.15	22.18	23
		50	0	22.21	22.19	22.19	23
	16QAM	1	0	22.47	22.46	22.43	23
		1	25	22.31	22.31	22.27	23
1		49	22.42	22.45	22.36	23	

		25	0	21.17	21.17	21.13	22
		25	13	21.16	21.14	21.1	22
		25	25	21.13	21.17	21.14	22
		50	0	21.12	21.12	21.14	22
	64QAM	1	0	21.31	21.38	21.29	22
		1	25	21.15	20.97	21.03	22
		1	49	21.34	21.27	21.25	22
		25	0	20.25	20.25	20.28	21
		25	13	20.19	20.3	20.22	21
		25	25	20.27	20.18	20.27	21
		50	0	20.24	20.28	20.22	21

LTE Band 7 Full power				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20775	21100	21425		
5MHz	QPSK	1	0	22.19	22.63	22.84	23.6	
		1	13	22.29	22.65	22.79	23.6	
		1	24	22.27	22.68	22.83	23.6	
		12	0	20.72	21.15	21.26	22.6	
		12	6	20.66	21.09	21.24	22.6	
		12	13	20.77	21.19	21.32	22.6	
	16QAM	25	0	20.67	21.09	21.23	22.6	
		1	0	21.6	21.93	22.02	22.6	
		1	13	21.56	21.96	21.99	22.6	
		1	24	21.64	21.97	22.03	22.6	
		12	0	20.22	20.58	20.69	21.6	
		12	6	20.12	20.55	20.66	21.6	
	64QAM	12	13	20.19	20.58	20.7	21.6	
		25	0	20.15	20.56	20.67	21.6	
		1	0	20.66	20.94	21.04	21.6	
		1	13	20.58	20.99	20.98	21.6	
		1	24	20.72	20.97	21.11	21.6	
		12	0	19.2	19.65	19.71	20.6	
		12	6	19.2	19.54	19.74	20.6	
		12	13	19.23	19.6	19.71	20.6	
		25	0	19.17	19.56	19.68	20.6	
Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz		QPSK			20800	21100	21400	
			1	0	22.24	22.54	22.79	23.6
	1		25	22.12	22.65	22.78	23.6	
	1		49	22.37	22.62	22.73	23.6	
	25		0	20.71	21.1	21.23	22.6	
	25		13	20.71	21.1	21.19	22.6	
		25	25	20.84	21.16	21.29	22.6	

	16QAM	50	0	20.7	21.13	21.23	22.6
		1	0	21.39	21.88	22.22	22.6
		1	25	21.32	21.6	21.89	22.6
		1	49	21.65	21.97	22.11	22.6
		25	0	20.14	20.53	20.63	21.6
		25	13	20.18	20.54	20.7	21.6
		25	25	20.23	20.61	20.72	21.6
	64QAM	50	0	20.17	20.52	20.68	21.6
		1	0	20.44	20.94	21.29	21.6
		1	25	20.31	20.6	20.92	21.6
		1	49	20.69	21.04	21.19	21.6
		25	0	19.12	19.57	19.65	20.6
		25	13	19.17	19.52	19.75	20.6
		25	25	19.32	19.67	19.72	20.6
50	0	19.24	19.57	19.75	20.6		
Bandwidth	Modulation	RB size	RB offset	Channel 20825	Channel 21100	Channel 21375	Tune up
15MHz	QPSK	1	0	22.12	22.43	22.67	23.6
		1	38	22.34	22.63	22.77	23.6
		1	74	22.43	22.72	22.74	23.6
		36	0	20.78	21.11	21.32	22.6
		36	18	20.85	21.12	21.3	22.6
		36	39	20.99	21.21	21.35	22.6
		75	0	20.82	21.11	21.26	22.6
	16QAM	1	0	21.5	21.83	21.88	22.6
		1	38	21.61	21.94	21.95	22.6
		1	74	21.69	22.02	22.1	22.6
		36	0	20.22	20.57	20.77	21.6
		36	18	20.29	20.59	20.74	21.6
		36	39	20.37	20.64	20.76	21.6
		75	0	20.28	20.57	20.67	21.6
	64QAM	1	0	20.49	20.9	20.88	21.6
		1	38	20.61	20.93	20.98	21.6
		1	74	20.69	21.04	21.19	21.6
		36	0	19.3	19.61	19.82	20.6
		36	18	19.28	19.64	19.8	20.6
		36	39	19.42	19.68	19.74	20.6
		75	0	19.28	19.65	19.7	20.6
Bandwidth	Modulation	RB size	RB offset	Channel 20850	Channel 21100	Channel 21350	Tune up
20MHz	QPSK	1	0	22.01	22.34	22.54	23.6
		1	50	22.42	22.31	22.48	23.6
		1	99	22.63	22.87	22.94	23.6
		50	0	20.77	21.04	21.28	22.6
		50	25	20.84	21.1	21.28	22.6

		50	50	20.99	21.26	21.29	22.6
		100	0	20.87	21.12	21.29	22.6
	16QAM	1	0	21.33	21.49	21.71	22.6
		1	50	21.62	21.49	21.78	22.6
		1	99	21.99	22.04	22.08	22.6
		50	0	20.25	20.49	20.68	21.6
		50	25	20.32	20.49	20.67	21.6
		50	50	20.46	20.64	20.74	21.6
		100	0	20.29	20.52	20.67	21.6
		64QAM	1	0	20.38	20.49	20.69
	1		50	20.62	20.58	20.87	21.6
	1		99	21.03	21.05	21.18	21.6
	50		0	19.29	19.52	19.74	20.6
	50		25	19.3	19.58	19.7	20.6
	50		50	19.48	19.66	19.78	20.6
	100		0	19.37	19.55	19.72	20.6

LTE Band 7 Hotspot on+sensor off				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20775	21100	21425		
5MHz	QPSK	1	0	18.14	18.52	18.7	19.6	
		1	13	18.15	18.61	18.73	19.6	
		1	24	18.22	18.56	18.71	19.6	
		12	0	18.21	18.63	18.71	19.6	
		12	6	18.16	18.58	18.69	19.6	
		12	13	18.2	18.65	18.79	19.6	
		25	0	18.18	18.58	18.7	19.6	
	16QAM	1	0	18.54	18.86	19.08	19.6	
		1	13	18.6	18.96	19.08	19.6	
		1	24	18.66	18.93	19.07	19.6	
		12	0	18.17	18.56	18.67	19.6	
		12	6	18.16	18.51	18.71	19.6	
		12	13	18.19	18.61	18.72	19.6	
		25	0	18.11	18.51	18.7	19.6	
	64QAM	1	0	18.45	18.75	19.05	19.6	
		1	13	18.45	18.82	18.94	19.6	
		1	24	18.63	18.86	18.99	19.6	
		12	0	18.07	18.4	18.55	19.6	
		12	6	18.07	18.37	18.55	19.6	
		12	13	18.18	18.52	18.54	19.6	
		25	0	18.02	18.45	18.58	19.6	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	10MHz	QPSK	1	0	20800	21100	21400	19.6

		1	25	17.97	18.28	18.6	19.6		
		1	49	18.35	18.68	18.74	19.6		
		25	0	18.2	18.58	18.73	19.6		
		25	13	18.2	18.58	18.74	19.6		
		25	25	18.27	18.66	18.74	19.6		
		50	0	18.21	18.61	18.75	19.6		
	16QAM	1	0	18.54	18.89	19.05	19.6		
		1	25	18.28	18.67	19.03	19.6		
		1	49	18.69	18.96	19.14	19.6		
		25	0	18.14	18.53	18.68	19.6		
		25	13	18.18	18.52	18.68	19.6		
		25	25	18.24	18.61	18.69	19.6		
	64QAM	50	0	18.17	18.53	18.71	19.6		
		1	0	18.53	18.76	18.96	19.6		
		1	25	18.24	18.55	18.99	19.6		
		1	49	18.54	18.84	19.13	19.6		
		25	0	18.1	18.42	18.55	19.6		
		25	13	18.06	18.44	18.54	19.6		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
					20825	21100	21375		
15MHz			QPSK	1	0	18.17	18.46	18.65	19.6
				1	38	18.32	18.59	18.72	19.6
				1	74	18.42	18.69	18.68	19.6
	36	0		18.29	18.59	18.76	19.6		
	36	18		18.36	18.65	18.78	19.6		
	36	39		18.45	18.71	18.76	19.6		
	16QAM	75	0	18.34	18.62	18.76	19.6		
		1	0	18.42	18.76	19.01	19.6		
		1	38	18.71	18.99	19.03	19.6		
		1	74	18.72	19.01	19.09	19.6		
		36	0	18.18	18.52	18.7	19.6		
		36	18	18.3	18.59	18.72	19.6		
	64QAM	36	39	18.39	18.65	18.68	19.6		
		75	0	18.28	18.55	18.69	19.6		
		1	0	18.4	18.65	18.91	19.6		
		1	38	18.65	18.84	18.91	19.6		
		1	74	18.59	19.01	19.04	19.6		
		36	0	18.14	18.35	18.6	19.6		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
					20850	21100	21350		

20MHz	QPSK	1	0	18.01	18.33	18.47	19.6
		1	50	18.09	18.46	18.59	19.6
		1	99	18.63	18.78	18.9	19.6
		50	0	18.26	18.6	18.74	19.6
		50	25	18.37	18.57	18.7	19.6
		50	50	18.5	18.76	18.83	19.6
		100	0	18.35	18.63	18.74	19.6
	16QAM	1	0	18.43	18.56	18.83	19.6
		1	50	18.7	18.83	18.84	19.6
		1	99	19.01	19.16	19.21	19.6
		50	0	18.25	18.51	18.67	19.6
		50	25	18.26	18.52	18.67	19.6
		50	50	18.41	18.64	18.76	19.6
		100	0	18.28	18.56	18.68	19.6
	64QAM	1	0	18.39	18.4	18.68	19.6
		1	50	18.61	18.7	18.73	19.6
		1	99	18.95	19.16	19.13	19.6
		50	0	18.09	18.36	18.56	19.6
		50	25	18.25	18.4	18.61	19.6
		50	50	18.31	18.62	18.71	19.6
		100	0	18.24	18.39	18.55	19.6

LTE Band 7 Hotspot on+sensor on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	15.83	16.07	16.04	16.6
		1	13	15.81	16.08	15.94	16.6
		1	24	15.88	16.14	15.98	16.6
		12	0	15.74	16.03	16.06	16.6
		12	6	15.71	15.96	15.94	16.6
		12	13	15.9	16.08	16.05	16.6
		25	0	15.92	16.02	15.97	16.6
	16QAM	1	0	16.03	16.21	16.37	16.6
		1	13	16.02	16.21	16.28	16.6
		1	24	16.29	16.47	16.48	16.6
		12	0	15.75	15.95	16.07	16.6
		12	6	15.83	15.99	16.04	16.6
		12	13	15.83	15.98	16.07	16.6
		25	0	15.67	15.99	15.91	16.6
	64QAM	1	0	15.96	16.03	16.36	16.6
		1	13	15.89	16.15	16.19	16.6
		1	24	16.26	16.46	16.41	16.6
		12	0	15.61	15.95	16	16.6
		12	6	15.71	15.97	15.96	16.6

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	12	13	15.74	15.88	15.92	16.6
		25	0	15.66	15.85	15.83	16.6
		1	0	15.7	16.15	16.18	16.6
		1	25	15.96	15.8	16.28	16.6
		1	49	15.88	16.2	16.02	16.6
		25	0	15.85	15.99	16.04	16.6
		25	13	15.84	16.01	16.05	16.6
	16QAM	25	25	15.89	16.05	16.1	16.6
		50	0	15.84	15.97	16.04	16.6
		1	0	16.27	16.34	16.23	16.6
		1	25	15.14	16.43	16.56	16.6
		1	49	16.44	16.16	16.3	16.6
		25	0	15.71	15.93	15.98	16.6
		25	13	15.8	15.92	15.91	16.6
	64QAM	25	25	15.85	16.03	15.88	16.6
		50	0	15.78	15.95	15.96	16.6
		1	0	16.09	16.21	16.1	16.6
		1	25	15.02	16.37	16.54	16.6
		1	49	16.28	16.07	16.17	16.6
		25	0	15.67	15.76	15.94	16.6
		25	13	15.77	15.85	15.78	16.6
	25	25	15.69	15.92	15.87	16.6	
	50	0	15.71	15.82	15.84	16.6	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
20825					21100	21375	
15MHz	QPSK	1	0	15.73	16.03	15.9	16.6
		1	38	16.04	16.09	15.94	16.6
		1	74	15.94	15.91	16.17	16.6
		36	0	15.84	16.02	16.06	16.6
		36	18	15.97	16.01	16.06	16.6
		36	39	15.94	16.08	16.13	16.6
		75	0	15.91	16.01	16.12	16.6
	16QAM	1	0	16.04	16.25	16.4	16.6
		1	38	16.41	16.28	16.19	16.6
		1	74	16.4	16.09	16.33	16.6
		36	0	15.74	16.07	16.13	16.6
		36	18	15.83	16.03	16.14	16.6
		36	39	16.04	16.14	16.07	16.6
		75	0	15.86	15.97	16.03	16.6
	64QAM	1	0	15.96	16.25	16.28	16.6
		1	38	16.32	16.16	16.04	16.6
		1	74	16.23	15.94	16.18	16.6
		36	0	15.7	16.05	15.99	16.6

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz		36	18	15.79	15.94	15.97	16.6
		36	39	15.93	16.01	16.02	16.6
		75	0	15.69	15.83	16	16.6
	QPSK	1	0	15.71	15.87	15.75	16.6
		1	50	15.69	16.36	15.88	16.6
		1	99	16.2	16.18	16.06	16.6
		50	0	15.99	16.05	16.02	16.6
		50	25	15.91	16	16.12	16.6
		50	50	16.01	16.1	16.15	16.6
		100	0	15.99	16.13	16.02	16.6
	16QAM	1	0	16.23	16.21	16.31	16.6
		1	50	16.45	16.47	16.6	16.6
		1	99	15.99	16.48	16.53	16.6
		50	0	15.82	15.96	16.05	16.6
		50	25	15.86	15.89	16	16.6
		50	50	15.93	16.06	16.08	16.6
		100	0	15.93	15.95	15.95	16.6
	64QAM	1	0	16.07	16.11	16.2	16.6
		1	50	16.35	16.46	16.48	16.6
		1	99	15.83	16.39	16.52	16.6
		50	0	15.75	15.92	16.02	16.6
		50	25	15.81	15.85	15.96	16.6
		50	50	15.87	15.94	16	16.6
		100	0	15.87	15.85	15.91	16.6

LTE Band 7 Body Scene(0mm SAR sensor on Level D5)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	19.33	19.7	19.8	20.6
		1	13	19.55	19.88	19.78	20.6
		1	24	19.51	19.81	19.92	20.6
		12	0	19.38	19.84	19.88	20.6
		12	6	19.38	19.89	19.64	20.6
		12	13	19.49	19.9	19.88	20.6
		25	0	19.45	19.84	19.88	20.6
	16QAM	1	0	19.44	20.24	20.27	20.6
		1	13	19.84	20.01	20.24	20.6
		1	24	19.7	20.14	20	20.6
		12	0	19.38	19.86	19.97	20.6
		12	6	19.52	19.78	19.71	20.6
		12	13	19.49	19.75	19.96	20.6
		25	0	19.46	19.81	19.82	20.6

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
				20800	21100	21400			
	64QAM	1	0	19.39	20.09	20.23	20.6		
		1	13	19.76	19.85	20.07	20.6		
		1	24	19.6	20.03	19.99	20.6		
		12	0	19.36	19.81	19.91	20.6		
		12	6	19.4	19.68	19.56	20.6		
		12	13	19.49	19.61	19.8	20.6		
		25	0	19.36	19.76	19.68	20.6		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
10MHz	QPSK	1	0	19.47	19.76	19.92	20.6		
		1	25	19.42	20.17	19.09	20.6		
		1	49	19.67	19.96	19.77	20.6		
		25	0	19.48	19.79	19.85	20.6		
		25	13	19.5	19.87	19.85	20.6		
		25	25	19.54	19.91	19.98	20.6		
		50	0	19.44	19.84	19.85	20.6		
	16QAM	1	0	19.26	20.08	20.16	20.6		
		1	25	19.47	19.9	20.32	20.6		
		1	49	20.07	20.22	20.31	20.6		
		25	0	19.42	19.74	19.86	20.6		
		25	13	19.46	19.7	19.79	20.6		
		25	25	19.52	19.87	19.82	20.6		
		50	0	19.38	19.84	19.77	20.6		
	64QAM	1	0	19.1	20.04	20.13	20.6		
		1	25	19.45	19.83	20.15	20.6		
		1	49	19.98	20.21	20.29	20.6		
		25	0	19.34	19.72	19.82	20.6		
		25	13	19.39	19.68	19.72	20.6		
		25	25	19.41	19.81	19.81	20.6		
		50	0	19.2	19.81	19.68	20.6		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
	15MHz	QPSK	1	0	19.29	19.75	19.87	20.6	
			1	38	19.59	19.89	19.92	20.6	
			1	74	19.75	19.92	19.94	20.6	
			36	0	19.54	19.88	19.95	20.6	
			36	18	19.67	19.83	19.97	20.6	
			36	39	19.69	20.03	20.01	20.6	
75			0	19.56	19.81	19.87	20.6		
16QAM		1	0	19.44	20.24	20.01	20.6		
		1	38	19.82	20.28	20.51	20.6		
		1	74	19.96	19.94	20.05	20.6		
		36	0	19.44	19.79	19.91	20.6		
		36	18	19.61	19.82	19.88	20.6		
		36	39	19.65	19.77	19.82	20.6		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
		15MHz	QPSK	1	0	19.29	19.75	19.87	20.6
1	38			19.59	19.89	19.92	20.6		
1	74			19.75	19.92	19.94	20.6		
36	0			19.54	19.88	19.95	20.6		
36	18			19.67	19.83	19.97	20.6		
36	39			19.69	20.03	20.01	20.6		
75	0			19.56	19.81	19.87	20.6		
16QAM	1		0	19.44	20.24	20.01	20.6		
	1		38	19.82	20.28	20.51	20.6		
	1		74	19.96	19.94	20.05	20.6		
	36		0	19.44	19.79	19.91	20.6		
	36		18	19.61	19.82	19.88	20.6		
	36		39	19.65	19.77	19.82	20.6		

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20850	21100	21350		
20MHz	64QAM	75	0	19.53	19.91	19.82	20.6	
		1	0	19.31	20.18	19.92	20.6	
		1	38	19.66	20.13	20.35	20.6	
		1	74	19.93	19.86	20.05	20.6	
		36	0	19.4	19.74	19.81	20.6	
		36	18	19.56	19.73	19.83	20.6	
		36	39	19.53	19.59	19.82	20.6	
		75	0	19.45	19.8	19.65	20.6	
	20MHz	QPSK	1	0	19.22	19.7	19.84	20.6
			1	50	19.09	19.16	19.67	20.6
			1	99	19.79	20.17	20.23	20.6
			50	0	19.53	19.98	20.04	20.6
			50	25	19.63	19.89	19.89	20.6
			50	50	19.78	20.01	20.09	20.6
			100	0	19.55	19.93	20.01	20.6
		16QAM	1	0	19.23	19.76	20.18	20.6
			1	50	19.22	20.25	19.7	20.6
			1	99	19.81	20.21	19.87	20.6
			50	0	19.45	19.76	19.95	20.6
			50	25	19.4	19.84	19.95	20.6
			50	50	19.72	19.97	20.06	20.6
100			0	19.46	19.89	19.9	20.6	
64QAM		1	0	19.21	19.75	20.14	20.6	
		1	50	19.17	20.11	19.7	20.6	
		1	99	19.68	20.19	19.76	20.6	
		50	0	19.4	19.75	19.83	20.6	
		50	25	19.38	19.67	19.9	20.6	
		50	50	19.69	19.82	19.94	20.6	
		100	0	19.4	19.8	19.76	20.6	

LTE Band 7 Body Scene(0mm SAR sensor on Level D1&D4)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	21.42	22.03	22	22.6
		1	13	21.51	22.09	22	22.6
		1	24	21.69	22.01	22.08	22.6
		12	0	21.01	21.48	21.53	22.6
		12	6	20.85	21.55	21.47	22.6
		12	13	21.12	21.52	21.63	22.6
		25	0	21.02	21.51	21.4	22.6
	16QAM	1	0	21.2	21.84	22.51	22.6
		1	13	22.03	22.52	22.19	22.6

		1	24	21.52	21.72	21.99	22.6
		12	0	20.45	20.91	20.98	21.6
		12	6	20.42	21.1	20.99	21.6
		12	13	20.52	20.98	20.96	21.6
		25	0	20.52	20.92	21.11	21.6
	64QAM	1	0	20.21	20.87	21.52	21.6
		1	13	21.08	21.53	21.28	21.6
		1	24	20.55	20.75	21	21.6
		12	0	19.5	19.94	20.05	20.6
		12	6	19.43	20.14	20.04	20.6
		12	13	19.58	19.96	20.02	20.6
		25	0	19.57	19.92	20.21	20.6
Bandwidth	Modulation	RB size	RB offset	Channel 20800	Channel 21100	Channel 21400	Tune up
10MHz	QPSK	1	0	21.55	21.94	21.92	22.6
		1	25	21.08	21.53	21.17	22.6
		1	49	21.77	22.07	22.11	22.6
		25	0	21.06	21.41	21.53	22.6
		25	13	21.09	21.6	21.54	22.6
		25	25	21.2	21.42	21.57	22.6
		50	0	21	21.58	21.47	22.6
	16QAM	1	0	21.9	21.9	21.7	22.6
		1	25	21.71	21.55	22.5	22.6
		1	49	21.98	22.4	22.34	22.6
		25	0	20.41	20.84	20.97	21.6
		25	13	20.56	20.89	20.94	21.6
		25	25	20.58	20.96	20.87	21.6
		50	0	20.47	20.86	20.91	21.6
	64QAM	1	0	20.95	20.94	20.77	21.6
		1	25	20.8	20.63	21.53	21.6
		1	49	21.07	21.42	21.43	21.6
		25	0	19.48	19.84	20	20.6
		25	13	19.55	19.96	19.97	20.6
		25	25	19.6	20.01	19.87	20.6
		50	0	19.48	19.88	19.93	20.6
Bandwidth	Modulation	RB size	RB offset	Channel 20825	Channel 21100	Channel 21375	Tune up
15MHz	QPSK	1	0	21.58	21.93	22.15	22.6
		1	38	21.68	22.04	22	22.6
		1	74	21.89	22.02	22.17	22.6
		36	0	21.11	21.48	21.54	22.6
		36	18	21.25	21.56	21.6	22.6
		36	39	21.38	21.65	21.63	22.6
		75	0	21.12	21.4	21.62	22.6
	16QAM	1	0	21.97	22.38	22.25	22.6

		1	38	21.82	22.53	22.29	22.6
		1	74	22.16	22.17	22.51	22.6
		36	0	20.55	20.91	21.09	21.6
		36	18	20.54	20.96	20.98	21.6
		36	39	20.76	21.05	21.05	21.6
		75	0	20.68	20.92	21	21.6
	64QAM	1	0	21.01	21.45	21.25	21.6
		1	38	20.81	21.62	21.28	21.6
		1	74	21.16	21.16	21.5	21.6
		36	0	19.61	19.99	20.13	20.6
		36	18	19.64	19.99	19.96	20.6
		36	39	19.83	20.15	20.11	20.6
		75	0	19.71	19.99	19.98	20.6
Bandwidth	Modulation	RB size	RB offset	Channel 20850	Channel 21100	Channel 21350	Tune up
20MHz	QPSK	1	0	21.21	21.66	21.78	22.6
		1	50	20.85	21.64	21.95	22.6
		1	99	21.96	22.1	22.11	22.6
		50	0	20.88	21.4	21.51	22.6
		50	25	21.14	21.38	21.48	22.6
		50	50	21.3	21.51	21.52	22.6
		100	0	21.14	21.42	21.59	22.6
	16QAM	1	0	21.53	21.59	22.17	22.6
		1	50	21.36	21.88	22.09	22.6
		1	99	22.33	22.57	22.38	22.6
		50	0	20.45	20.78	20.9	21.6
		50	25	20.51	20.84	21.04	21.6
		50	50	20.7	20.91	20.95	21.6
		100	0	20.5	20.8	20.99	21.6
	64QAM	1	0	20.6	20.59	21.27	21.6
		1	50	20.37	20.91	21.17	21.6
		1	99	21.34	21.57	21.47	21.6
		50	0	19.45	19.79	19.99	20.6
		50	25	19.55	19.84	20.05	20.6
		50	50	19.76	19.97	19.99	20.6
		100	0	19.57	19.85	20	20.6

LTE Band 12 Full power				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23017	23095	23173		
1.4MHz	QPSK	1	0	23.49	23.29	23.43	24	
		1	2	23.12	23.11	23.08	24	
		1	5	23.48	23.20	23.46	24	
		3	0	23.42	23.20	23.35	24	
		3	2	23.42	23.01	23.22	24	
		3	3	23.37	23.23	23.30	24	
		6	0	22.48	22.20	22.36	23	
	16QAM	1	0	22.75	22.54	22.60	23	
		1	2	22.47	22.50	22.34	23	
		1	5	22.75	22.51	22.74	23	
		3	0	22.44	22.21	22.38	23	
		3	2	22.32	22.14	22.40	23	
		3	3	22.28	22.10	22.36	23	
		6	0	21.34	21.02	21.34	22	
	64QAM	1	0	21.5	21.38	21.49	22	
		1	2	21.2	21.19	21.09	22	
		1	5	21.57	21.24	21.51	22	
		3	0	21.49	21.29	21.35	22	
		3	2	21.47	21.02	21.26	22	
		3	3	21.42	21.23	21.31	22	
		6	0	20.53	20.24	20.38	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
3MHz	QPSK	1	0	23.59	23.39	23.47	24	
		1	7	23.13	22.72	23.12	24	
		1	14	23.58	23.35	23.49	24	
		8	0	22.31	22.21	22.29	23	
		8	4	22.33	22.07	22.30	23	
		8	7	22.38	22.19	22.29	23	
		15	0	22.48	22.21	22.34	23	
	16QAM	1	0	22.56	22.52	22.50	23	
		1	7	22.45	21.87	21.92	23	
		1	14	22.70	22.51	22.68	23	
		8	0	21.24	21.12	21.15	22	
		8	4	21.38	21.19	21.37	22	
		8	7	21.33	21.20	21.29	22	
		15	0	21.35	21.17	21.28	22	
	64QAM	1	0	21.65	21.41	21.5	22	
		1	7	21.16	20.72	21.18	22	
		1	14	21.61	21.4	21.57	22	
		8	0	20.33	20.29	20.31	21	
		8	4	20.35	20.08	20.32	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	3MHz	QPSK	1	0	23.59	23.39	23.47	24
1			7	23.13	22.72	23.12	24	
1			14	23.58	23.35	23.49	24	
8			0	22.31	22.21	22.29	23	
8			4	22.33	22.07	22.30	23	
8			7	22.38	22.19	22.29	23	
15			0	22.48	22.21	22.34	23	
16QAM		1	0	22.56	22.52	22.50	23	
		1	7	22.45	21.87	21.92	23	
		1	14	22.70	22.51	22.68	23	
		8	0	21.24	21.12	21.15	22	
		8	4	21.38	21.19	21.37	22	
		8	7	21.33	21.20	21.29	22	
		15	0	21.35	21.17	21.28	22	
64QAM		1	0	21.65	21.41	21.5	22	
		1	7	21.16	20.72	21.18	22	
		1	14	21.61	21.4	21.57	22	
		8	0	20.33	20.29	20.31	21	
		8	4	20.35	20.08	20.32	21	

Bandwidth	Modulation	8	7	20.41	20.25	20.3	21	
		15	0	20.53	20.25	20.41	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23035	23095	23155		
5MHz	QPSK	1	0	23.50	23.41	23.53	24	
		1	13	23.52	23.27	23.44	24	
		1	24	23.57	23.42	23.53	24	
		12	0	22.41	22.35	22.37	23	
		12	6	22.39	22.19	22.31	23	
		12	13	22.43	22.32	22.40	23	
		25	0	22.41	22.20	22.34	23	
	16QAM	1	0	22.62	22.60	22.67	23	
		1	13	22.62	22.44	22.63	23	
		1	24	22.60	22.66	22.70	23	
		12	0	21.41	21.31	21.34	22	
		12	6	21.36	21.10	21.24	22	
		12	13	21.40	21.30	21.41	22	
		25	0	21.36	21.11	21.31	22	
	64QAM	1	0	21.52	21.44	21.6	22	
		1	13	21.57	21.27	21.47	22	
		1	24	21.61	21.45	21.6	22	
		12	0	20.46	20.42	20.41	21	
		12	6	20.42	20.23	20.36	21	
		12	13	20.48	20.34	20.44	21	
		25	0	20.43	20.21	20.36	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					23060	23095	23130	
	10MHz	QPSK	1	0	23.61	23.59	23.44	24
1			25	23.05	22.84	23.11	24	
1			49	23.66	23.62	23.62	24	
25			0	22.51	22.44	22.46	23	
25			13	22.49	22.3	22.43	23	
25			25	22.37	22.41	22.45	23	
50			0	22.43	22.29	22.47	23	
16QAM		1	0	22.66	22.68	22.51	23	
		1	25	22.70	22.56	22.73	23	
		1	49	22.61	22.72	22.74	23	
		25	0	21.45	21.35	21.27	22	
		25	13	21.48	21.25	21.39	22	
		25	25	21.31	21.37	21.42	22	
		50	0	21.38	21.23	21.41	22	
64QAM		1	0	21.64	21.65	21.48	22	
		1	25	21.12	20.93	21.15	22	
		1	49	21.68	21.7	21.68	22	
		25	0	20.58	20.44	20.52	21	
		25	13	20.51	20.32	20.44	21	
		25	25	20.41	20.44	20.49	21	

		50	0	20.52	20.31	20.56	21
--	--	----	---	-------	-------	-------	----

LTE Band 17 Full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23755	23790	23825	
5MHz	QPSK	1	0	23.44	23.39	23.37	24
		1	13	23.40	23.49	23.37	24
		1	24	23.33	23.37	23.40	24
		12	0	22.05	22.09	22.01	23
		12	6	22.02	22.01	22.00	23
		12	13	22.02	22.05	22.05	23
		25	0	22.03	22.04	21.93	23
	16QAM	1	0	22.57	22.40	22.51	23
		1	13	22.45	22.52	22.47	23
		1	24	22.61	22.50	22.52	23
		12	0	21.27	21.22	21.15	22
		12	6	21.18	21.16	21.18	22
		12	13	21.25	21.27	21.22	22
		25	0	21.19	21.17	21.18	22
	64QAM	1	0	21.47	21.46	21.4	22
		1	13	21.49	21.55	21.39	22
		1	24	21.4	21.44	21.48	22
		12	0	20.1	20.18	20.06	21
		12	6	20.09	20.06	20.07	21
		12	13	20.08	20.09	20.06	21
		25	0	20.11	20.13	19.94	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23780	23790	23800	
10MHz	QPSK	1	0	23.66	23.54	23.56	24
		1	25	23.01	23.03	23.21	24
		1	49	23.44	23.44	23.53	24
		25	0	22.15	22.17	22.12	23
		25	13	22.12	22.12	22.12	23
		25	25	22.19	22.17	22.14	23
		50	0	22.1	22.13	22.12	23
	16QAM	1	0	22.66	22.58	22.50	23
		1	25	22.41	22.52	22.45	23
		1	49	22.62	22.62	22.71	23
		25	0	21.31	21.33	21.31	22
		25	13	21.33	21.37	21.33	22
		25	25	21.35	21.34	21.35	22
		50	0	21.31	21.30	21.32	22
	64QAM	1	0	21.71	21.59	21.6	22
		1	25	21.03	21.06	21.27	22
		1	49	21.53	21.45	21.62	22
		25	0	20.19	20.18	20.15	21

		25	13	20.15	20.19	20.14	21
		25	25	20.2	20.2	20.14	21
		50	0	20.1	20.14	20.21	21

LTE Band 26 Full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26697	26865	27033	
1.4MHz	QPSK	1	0	23.26	23.19	23.21	24
		1	2	22.83	22.95	22.96	24
		1	5	23.23	23.18	23.19	24
		3	0	23.14	23.07	23.16	24
		3	2	23.17	23.16	23.14	24
		3	3	23.15	23.10	23.11	24
		6	0	22.11	22.15	22.15	23
	16QAM	1	0	22.54	22.49	22.38	23
		1	2	22.27	22.24	22.33	23
		1	5	22.45	22.38	22.47	23
		3	0	22.05	22.02	22.04	23
		3	2	22.19	22.11	22.09	23
		3	3	22.15	22.07	22.03	23
		6	0	21.14	20.97	21.07	22
	64QAM	1	0	21.36	21.27	21.28	22
		1	2	20.84	21.02	21.03	22
		1	5	21.29	21.22	21.26	22
		3	0	21.16	21.15	21.23	22
		3	2	21.22	21.19	21.16	22
		3	3	21.24	21.16	21.11	22
		6	0	20.2	20.2	20.21	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26705	26865	27025	
3MHz	QPSK	1	0	23.27	23.23	23.24	24
		1	7	22.77	22.88	22.80	24
		1	14	23.22	23.25	23.26	24
		8	0	22.21	22.15	22.13	23
		8	4	22.12	22.18	22.14	23
		8	7	22.18	22.10	22.13	23
		15	0	22.19	22.18	22.22	23
	16QAM	1	0	22.38	22.44	22.42	23
		1	7	22.02	21.99	21.90	23
		1	14	22.44	22.41	22.40	23
		8	0	21.07	20.94	21.07	22
		8	4	21.13	21.11	21.18	22
		8	7	21.12	21.06	21.14	22
		15	0	21.18	21.08	21.15	22
	64QAM	1	0	21.29	21.26	21.28	22
		1	7	20.81	20.91	20.87	22

		1	14	21.25	21.32	21.32	22
		8	0	20.27	20.21	20.18	21
		8	4	20.21	20.25	20.23	21
		8	7	20.22	20.14	20.15	21
		15	0	20.27	20.26	20.28	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26715	26865	27015	
5MHz	QPSK	1	0	23.30	23.22	23.26	24
		1	13	23.24	23.23	23.26	24
		1	24	23.24	23.27	23.27	24
		12	0	22.27	22.21	22.20	23
		12	6	22.23	22.16	22.16	23
		12	13	22.21	22.28	22.22	23
		25	0	22.19	22.16	22.16	23
	16QAM	1	0	22.48	22.39	22.39	23
		1	13	22.41	22.35	22.39	23
		1	24	22.46	22.38	22.44	23
		12	0	21.25	21.20	21.17	22
		12	6	21.13	21.09	21.13	22
		12	13	21.11	21.21	21.18	22
		25	0	21.11	21.14	21.11	22
	64QAM	1	0	21.39	21.28	21.35	22
		1	13	21.32	21.3	21.3	22
		1	24	21.3	21.33	21.34	22
		12	0	20.28	20.23	20.25	21
		12	6	20.26	20.16	20.18	21
		12	13	20.28	20.29	20.28	21
		25	0	20.2	20.24	20.23	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26750	26865	26990	
10MHz	QPSK	1	0	23.24	23.19	23.20	24
		1	25	22.94	22.86	22.80	24
		1	49	23.20	23.19	23.22	24
		25	0	22.20	22.22	22.20	23
		25	13	22.24	22.19	22.17	23
		25	25	22.25	22.19	22.20	23
		50	0	22.22	22.24	22.22	23
	16QAM	1	0	22.46	22.44	22.40	23
		1	25	22.37	22.32	22.03	23
		1	49	22.49	22.40	22.37	23
		25	0	21.11	21.12	21.08	22
		25	13	21.17	21.11	21.11	22
		25	25	21.08	21.11	21.11	22
		50	0	21.12	21.09	21.11	22
	64QAM	1	0	21.32	21.23	21.27	22
		1	25	20.98	20.88	20.82	22
		1	49	21.2	21.23	21.24	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26775	26865	26965	
15MHz	QPSK	25	0	20.27	20.26	20.22	21
		25	13	20.34	20.21	20.2	21
		25	25	20.31	20.23	20.23	21
		50	0	20.24	20.33	20.27	21
		1	0	23.26	23.23	23.24	24
		1	38	23.35	23.29	23.27	24
		1	74	23.18	23.17	23.16	24
	16QAM	36	0	22.29	22.31	22.25	23
		36	18	22.29	22.25	22.27	23
		36	39	22.33	22.32	22.28	23
		75	0	22.29	22.24	22.22	23
		1	0	22.46	22.51	22.47	23
		1	38	22.58	22.54	22.49	23
		1	74	22.41	22.42	22.40	23
	64QAM	36	0	21.20	21.25	21.21	22
		36	18	21.24	21.22	21.19	22
		36	39	21.20	21.23	21.22	22
		75	0	21.19	21.18	21.16	22
		1	0	21.33	21.26	21.26	22
		1	38	21.4	21.36	21.32	22
		1	74	21.26	21.26	21.17	22
	64QAM	36	0	20.36	20.33	20.28	21
		36	18	20.34	20.27	20.31	21
		36	39	20.42	20.41	20.34	21
		75	0	20.35	20.32	20.32	21

LTE Band 38 Full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37775	38000	38225	
5MHz	QPSK	1	0	23.34	23.33	23.42	24
		1	13	23.26	23.27	23.22	24
		1	24	23.33	23.41	23.48	24
		12	0	22.27	22.31	22.38	23
		12	6	22.21	22.22	22.29	23
		12	13	22.31	22.35	22.37	23
		25	0	22.27	22.28	22.39	23
	16QAM	1	0	22.29	22.40	22.42	23
		1	13	21.93	22.31	22.23	23
		1	24	22.25	22.52	22.60	23
		12	0	21.19	21.22	21.26	22
		12	6	21.18	21.15	21.31	22
		12	13	21.22	21.26	21.36	22
		25	0	21.20	21.19	21.28	22
	64QAM	1	0	21.41	21.39	21.51	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37800	38000	38200	
10MHz	QPSK	1	13	21.3	21.36	21.32	22
		1	24	21.36	21.47	21.55	22
		12	0	20.34	20.37	20.39	21
		12	6	20.25	20.25	20.36	21
		12	13	20.33	20.39	20.43	21
		25	0	20.37	20.36	20.46	21
	16QAM	1	0	23.39	23.37	23.45	24
		1	25	23.30	23.31	23.27	24
		1	49	23.38	23.46	23.53	24
		25	0	22.32	22.37	22.41	23
		25	13	22.23	22.27	22.32	23
		25	25	22.34	22.38	22.40	23
	64QAM	50	0	22.30	22.30	22.41	23
		1	0	22.33	22.45	22.47	23
		1	25	21.95	22.35	22.28	23
		1	49	22.28	22.55	22.65	23
		25	0	21.24	21.28	21.30	22
		25	13	21.20	21.18	21.33	22
15MHz	QPSK	25	25	21.25	21.32	21.42	22
		50	0	21.24	21.23	21.31	22
		1	0	21.42	21.43	21.48	22
		1	25	21.37	21.36	21.35	22
		1	49	21.42	21.48	21.6	22
		25	0	20.4	20.4	20.41	21
	16QAM	25	13	20.23	20.35	20.34	21
		25	25	20.41	20.45	20.45	21
		50	0	20.3	20.31	20.48	21
		1	0	23.43	23.41	23.48	24
		1	38	23.32	23.33	23.29	24
		1	74	23.41	23.49	23.58	24
	64QAM	36	0	22.37	22.40	22.43	23
		36	18	22.28	22.32	22.36	23
		36	39	22.37	22.41	22.44	23
		75	0	22.35	22.36	22.44	23
		1	0	22.35	22.51	22.52	23
		1	38	21.99	22.40	22.30	23
16QAM	1	74	22.33	22.58	22.70	23	
	36	0	21.30	21.31	21.34	22	
	36	18	21.23	21.23	21.35	22	
	36	39	21.29	21.34	21.44	22	
	75	0	21.28	21.28	21.37	22	
	1	0	21.48	21.51	21.52	22	
64QAM	1	38	21.35	21.36	21.36	22	

		1	74	21.44	21.55	21.62	22	
		36	0	20.38	20.46	20.52	21	
		36	18	20.3	20.37	20.39	21	
		36	39	20.41	20.47	20.49	21	
		75	0	20.41	20.38	20.49	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37850	38000	38150		
20MHz	QPSK	1	0	23.45	23.43	23.51	24	
		1	50	23.36	23.37	23.33	24	
		1	99	23.46	23.54	23.63	24	
		50	0	22.41	22.42	22.46	23	
		50	25	22.32	22.34	22.41	23	
		50	50	22.42	22.45	22.47	23	
		100	0	22.37	22.38	22.46	23	
	16QAM	1	0	22.38	22.54	22.58	23	
		1	50	22.02	22.46	22.33	23	
		1	99	22.38	22.60	22.72	23	
		50	0	21.33	21.33	21.38	22	
		50	25	21.27	21.28	21.39	22	
		50	50	21.34	21.37	21.47	22	
		100	0	21.31	21.32	21.40	22	
	64QAM	1	0	21.46	21.51	21.53	22	
		1	50	21.36	21.38	21.34	22	
		1	99	21.52	21.54	21.69	22	
		50	0	20.45	20.5	20.51	21	
		50	25	20.36	20.38	20.49	21	
		50	50	20.51	20.55	20.5	21	
		100	0	20.47	20.39	20.47	21	
	LTE Band 38 Hotspot on+sensor off				Conducted Power(dBm)			
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					37775	38000	38225	
5MHz	QPSK	1	0	22.35	22.21	22.32	23	
		1	13	21.73	21.68	21.55	23	
		1	24	22.29	22.36	22.39	23	
		12	0	22.34	22.35	22.37	23	
		12	6	22.24	22.28	22.29	23	
		12	13	22.24	22.29	22.35	23	
		25	0	22.26	22.31	22.31	23	
	16QAM	1	0	22.41	22.26	22.22	23	
		1	13	21.86	21.96	22.16	23	
		1	24	22.41	22.30	22.32	23	
		12	0	21.23	21.22	21.27	22	
		12	6	21.20	21.20	21.27	22	
		12	13	21.23	21.22	21.27	22	
		25	0	21.16	21.22	21.24	22	
	64QAM	1	0	21.43	21.33	21.29	22	

		1	13	20.96	21.05	21.16	22
		1	24	21.45	21.33	21.34	22
		12	0	20.3	20.27	20.34	21
		12	6	20.27	20.26	20.35	21
		12	13	20.27	20.24	20.28	21
		25	0	20.23	20.31	20.27	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37800	38000	38200	
10MHz	QPSK	1	0	22.39	22.26	22.36	23
		1	25	21.79	21.71	21.59	23
		1	49	22.34	22.40	22.44	23
		25	0	22.40	22.38	22.40	23
		25	13	22.28	22.34	22.34	23
		25	25	22.28	22.33	22.39	23
		50	0	22.30	22.33	22.37	23
	16QAM	1	0	22.46	22.28	22.28	23
		1	25	21.91	21.99	22.19	23
		1	49	22.46	22.35	22.35	23
		25	0	21.28	21.26	21.31	22
		25	13	21.24	21.24	21.30	22
		25	25	21.27	21.24	21.31	22
		50	0	21.20	21.25	21.27	22
	64QAM	1	0	21.54	21.29	21.31	22
		1	25	21	21.07	21.27	22
		1	49	21.49	21.38	21.43	22
		25	0	20.38	20.28	20.34	21
		25	13	20.31	20.28	20.32	21
		25	25	20.37	20.25	20.38	21
		50	0	20.21	20.34	20.32	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37825	38000	38175	
15MHz	QPSK	1	0	22.41	22.30	22.38	23
		1	38	21.81	21.74	21.63	23
		1	74	22.39	22.44	22.48	23
		36	0	22.43	22.40	22.46	23
		36	18	22.30	22.38	22.38	23
		36	39	22.33	22.38	22.45	23
		75	0	22.36	22.37	22.39	23
	16QAM	1	0	22.50	22.34	22.33	23
		1	38	21.96	22.05	22.24	23
		1	74	22.51	22.37	22.37	23
		36	0	21.31	21.31	21.36	22
		36	18	21.26	21.28	21.33	22
		36	39	21.31	21.30	21.35	22
		75	0	21.22	21.29	21.31	22
	64QAM	1	0	21.56	21.4	21.33	22
		1	38	20.97	21.07	21.25	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37850	38000	38150		
		1	74	21.55	21.4	21.41	22	
		36	0	20.36	20.37	20.37	21	
		36	18	20.33	20.37	20.36	21	
		36	39	20.33	20.34	20.4	21	
		75	0	20.28	20.32	20.33	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
20MHz	QPSK	1	0	22.43	22.35	22.4	23	
		1	50	21.85	21.78	21.66	23	
		1	99	22.45	22.46	22.51	23	
		50	0	22.45	22.43	22.48	23	
		50	25	22.32	22.4	22.42	23	
		50	50	22.38	22.43	22.5	23	
		100	0	22.38	22.39	22.43	23	
	16QAM	1	0	22.56	22.38	22.37	23	
		1	50	21.99	22.09	22.27	23	
		1	99	22.54	22.43	22.40	23	
		50	0	21.35	21.34	21.38	22	
		50	25	21.28	21.31	21.35	22	
		50	50	21.33	21.33	21.38	22	
		100	0	21.28	21.32	21.36	22	
	64QAM	1	0	21.6	21.45	21.39	22	
		1	50	21.08	21.17	21.36	22	
		1	99	21.58	21.45	21.48	22	
		50	0	20.43	20.37	20.47	21	
		50	25	20.3	20.31	20.44	21	
		50	50	20.4	20.38	20.4	21	
		100	0	20.37	20.33	20.46	21	
	LTE Band 38 Hotspot on+sensor on				Conducted Power(dBm)			
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	5MHz	QPSK	1	0	21.83	21.61	21.47	22.5
1			13	21.57	21.09	21.37	22.5	
1			24	21.66	21.47	21.35	22.5	
12			0	21.66	21.45	21.33	22.5	
12			6	21.58	21.36	21.26	22.5	
12			13	21.58	21.39	21.32	22.5	
25			0	21.54	21.35	21.34	22.5	
16QAM		1	0	21.92	21.60	21.49	22.5	
		1	13	21.32	21.06	21.05	22.5	
		1	24	21.62	21.50	21.48	22.5	
		12	0	21.08	20.85	20.81	22	
		12	6	21.00	20.82	20.66	22	
		12	13	20.94	20.75	20.73	22	
		25	0	21.07	20.82	20.70	22	
64QAM		1	0	21.48	21.16	21.04	22	

		1	13	20.84	20.63	20.64	22
		1	24	21.19	21.08	21.00	22
		12	0	20.09	19.88	19.89	21
		12	6	20.07	19.86	19.69	21
		12	13	19.95	19.85	19.77	21
		25	0	20.09	19.85	19.73	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37800	38000	38200	
10MHz	QPSK	1	0	21.91	21.66	21.53	22.5
		1	25	21.62	21.15	21.43	22.5
		1	49	21.71	21.53	21.44	22.5
		25	0	21.75	21.53	21.40	22.5
		25	13	21.67	21.41	21.35	22.5
		25	25	21.66	21.45	21.37	22.5
		50	0	21.63	21.45	21.40	22.5
	16QAM	1	0	22.01	21.70	21.57	22.5
		1	25	21.42	21.15	21.14	22.5
		1	49	21.69	21.58	21.54	22.5
		25	0	21.14	20.94	20.88	22
		25	13	21.10	20.91	20.73	22
		25	25	21.00	20.85	20.81	22
		50	0	21.12	20.88	20.80	22
	64QAM	1	0	21.59	21.26	21.09	22
		1	25	20.95	20.71	20.69	22
		1	49	21.26	21.12	21.06	22
		25	0	20.23	19.99	19.92	21
		25	13	20.17	19.94	19.77	21
		25	25	20.08	19.90	19.88	21
		50	0	20.17	19.95	19.85	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37825	38000	38175	
15MHz	QPSK	1	0	22.00	21.72	21.60	22.5
		1	38	21.68	21.21	21.53	22.5
		1	74	21.77	21.62	21.54	22.5
		36	0	21.83	21.62	21.46	22.5
		36	18	21.73	21.47	21.41	22.5
		36	39	21.71	21.54	21.45	22.5
		75	0	21.72	21.55	21.45	22.5
	16QAM	1	0	22.06	21.79	21.66	22.5
		1	38	21.48	21.25	21.22	22.5
		1	74	21.77	21.67	21.63	22.5
		36	0	21.24	21.02	20.96	22
		36	18	21.16	20.99	20.83	22
		36	39	21.08	20.95	20.87	22
		75	0	21.21	20.97	20.89	22
	64QAM	1	0	21.57	21.32	21.24	22
		1	38	21.03	20.83	20.78	22

		1	74	21.31	21.22	21.19	22	
		36	0	20.30	20.03	19.96	21	
		36	18	20.17	20.00	19.89	21	
		36	39	20.11	19.96	19.94	21	
		75	0	20.26	19.99	19.97	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37850	38000	38150		
20MHz	QPSK	1	0	22.08	21.82	21.67	22.5	
		1	50	21.75	21.3	21.6	22.5	
		1	99	21.84	21.67	21.62	22.5	
		50	0	21.9	21.69	21.53	22.5	
		50	25	21.82	21.55	21.49	22.5	
		50	50	21.77	21.62	21.5	22.5	
	16QAM	1	0	22.13	21.87	21.73	22.5	
		1	50	21.54	21.33	21.31	22.5	
		1	99	21.85	21.72	21.71	22.5	
		50	0	21.32	21.09	21.02	22	
		50	25	21.21	21.07	20.92	22	
		50	50	21.18	21.01	20.96	22	
	64QAM	100	0	21.26	21.04	20.99	22	
		1	0	21.67	21.40	21.26	22	
		1	50	21.07	20.89	20.88	22	
		1	99	21.39	21.26	21.23	22	
		50	0	20.36	20.18	20.06	21	
		50	25	20.26	20.17	19.95	21	
	LTE Band 38 Body Scene(0mm SAR sensor on Level D5)				Conducted Power(dBm)			
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					37775	38000	38225	
5MHz	QPSK	1	0	22.66	22.65	22.68	23.5	
		1	13	22.66	22.69	22.66	23.5	
		1	24	22.71	22.76	22.80	23.5	
		12	0	22.15	22.23	22.19	23	
		12	6	22.10	22.11	22.23	23	
		12	13	22.11	22.20	22.23	23	
		25	0	22.13	22.15	22.26	23	
	16QAM	1	0	22.19	22.16	22.22	23	
		1	13	22.23	22.13	22.35	23	
		1	24	22.20	22.29	22.35	23	
		12	0	21.07	21.13	21.21	22	
		12	6	21.03	21.05	21.16	22	
		12	13	21.05	21.14	21.15	22	
		25	0	21.01	21.05	21.13	22	
	64QAM	1	0	21.22	21.25	21.30	22	

		1	13	21.27	21.17	21.38	22
		1	24	21.29	21.32	21.36	22
		12	0	20.13	20.15	20.23	21
		12	6	20.05	20.13	20.16	21
		12	13	20.11	20.20	20.24	21
		25	0	20.10	20.14	20.13	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37800	38000	38200	
10MHz	QPSK	1	0	22.74	22.75	22.78	23.5
		1	25	22.76	22.75	22.75	23.5
		1	49	22.77	22.83	22.87	23.5
		25	0	22.21	22.29	22.27	23
		25	13	22.16	22.21	22.29	23
		25	25	22.21	22.25	22.32	23
		50	0	22.22	22.21	22.32	23
	16QAM	1	0	22.26	22.26	22.28	23
		1	25	22.30	22.18	22.43	23
		1	49	22.28	22.37	22.41	23
		25	0	21.14	21.18	21.26	22
		25	13	21.10	21.12	21.21	22
		25	25	21.13	21.23	21.22	22
		50	0	21.10	21.15	21.19	22
	64QAM	1	0	21.36	21.32	21.29	22
		1	25	21.38	21.22	21.47	22
		1	49	21.29	21.38	21.46	22
		25	0	20.19	20.22	20.28	21
		25	13	20.11	20.17	20.28	21
		25	25	20.22	20.26	20.31	21
		50	0	20.11	20.24	20.26	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37825	38000	38175	
15MHz	QPSK	1	0	22.83	22.81	22.85	23.5
		1	38	22.84	22.82	22.80	23.5
		1	74	22.85	22.90	22.92	23.5
		36	0	22.28	22.34	22.33	23
		36	18	22.26	22.30	22.36	23
		36	39	22.28	22.31	22.41	23
		75	0	22.28	22.29	22.38	23
	16QAM	1	0	22.36	22.31	22.35	23
		1	38	22.38	22.25	22.49	23
		1	74	22.36	22.42	22.48	23
		36	0	21.22	21.26	21.34	22
		36	18	21.19	21.19	21.30	22
		36	39	21.21	21.29	21.31	22
		75	0	21.17	21.24	21.28	22
	64QAM	1	0	21.40	21.36	21.38	22
		1	38	21.43	21.34	21.58	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37850	38000	38150	
20MHz	QPSK	1	74	21.43	21.49	21.57	22
		36	0	20.30	20.30	20.40	21
		36	18	20.27	20.25	20.35	21
		36	39	20.25	20.34	20.33	21
		75	0	20.19	20.31	20.34	21
	16QAM	1	0	22.90	22.90	22.92	23.5
		1	50	22.93	22.92	22.89	23.5
		1	99	22.90	22.96	23.01	23.5
		50	0	22.37	22.42	22.39	23
		50	25	22.31	22.36	22.46	23
		50	50	22.37	22.38	22.48	23
		100	0	22.36	22.38	22.45	23
	64QAM	1	0	22.46	22.38	22.43	23
		1	50	22.45	22.35	22.57	23
		1	99	22.42	22.48	22.56	23
		50	0	21.27	21.36	21.41	22
		50	25	21.26	21.26	21.35	22
		50	50	21.28	21.34	21.40	22
		100	0	21.26	21.32	21.35	22
	64QAM	1	0	21.52	21.44	21.43	22
		1	50	21.54	21.36	21.66	22
		1	99	21.43	21.54	21.61	22
		50	0	20.33	20.37	20.46	21
		50	25	20.28	20.27	20.40	21
		50	50	20.34	20.36	20.48	21
100		0	20.34	20.35	20.38	21	

LTE Band 41 Full power				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40165	40690	41215	
5MHz	QPSK	1	0	23.01	22.98	23.05	24
		1	13	22.06	22.14	22.30	24
		1	24	23.00	23.12	23.07	24
		12	0	21.87	21.94	21.95	23
		12	6	21.78	21.73	21.81	23
		12	13	21.85	21.88	21.89	23
		25	0	21.84	21.89	21.91	23
	16QAM	1	0	22.05	22.04	22.17	23
		1	13	21.45	21.53	21.69	23
		1	24	22.00	22.20	22.10	23
		12	0	20.75	20.80	20.86	22
		12	6	20.70	20.73	20.73	22
		12	13	20.72	20.85	20.77	22
		25	0	20.80	20.71	20.80	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40190	40690	41190	
10MHz	64QAM	1	0	21.07	20.98	21.06	22
		1	13	20.07	20.2	20.35	22
		1	24	21.04	21.18	21.11	22
		12	0	19.92	19.99	19.99	21
		12	6	19.8	19.77	19.81	21
		12	13	19.94	19.96	19.9	21
		25	0	19.86	19.94	19.94	21
10MHz	QPSK	1	0	23.05	23.04	23.10	24
		1	25	22.12	22.17	22.34	24
		1	49	23.04	23.17	23.10	24
		25	0	21.90	21.97	21.99	23
		25	13	21.80	21.78	21.87	23
		25	25	21.88	21.93	21.92	23
		50	0	21.87	21.92	21.95	23
	16QAM	1	0	22.11	22.09	22.20	23
		1	25	21.48	21.56	21.73	23
		1	49	22.03	22.22	22.14	23
		25	0	20.81	20.86	20.91	22
		25	13	20.73	20.76	20.77	22
		25	25	20.76	20.90	20.81	22
		50	0	20.83	20.76	20.85	22
	64QAM	1	0	21.08	21.12	21.11	22
		1	25	20.17	20.2	20.39	22
		1	49	21.13	21.19	21.12	22
		25	0	19.97	20.05	20.08	21
		25	13	19.83	19.85	19.87	21
		25	25	19.9	20.02	19.93	21
		50	0	19.88	19.97	20.01	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40215	40690	41165	
15MHz	QPSK	1	0	23.09	23.08	23.12	24
		1	38	22.18	22.22	22.37	24
		1	74	23.07	23.19	23.15	24
		36	0	21.92	22.02	22.04	23
		36	18	21.82	21.84	21.91	23
		36	39	21.94	21.98	21.94	23
		75	0	21.93	21.97	22.01	23
	16QAM	1	0	22.15	22.15	22.24	23
		1	38	21.53	21.60	21.79	23
		1	74	22.07	22.25	22.18	23
		36	0	20.85	20.89	20.95	22
		36	18	20.77	20.79	20.79	22
		36	39	20.80	20.94	20.84	22
		75	0	20.88	20.81	20.91	22
	64QAM	1	0	21.12	21.13	21.14	22

		1	38	20.26	20.27	20.41	22
		1	74	21.14	21.2	21.18	22
		36	0	19.93	20.03	20.12	21
		36	18	19.9	19.88	20.01	21
		36	39	20.01	20.05	20.01	21
		75	0	19.98	20	20.03	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40240	40690	41140	
20MHz	QPSK	1	0	23.14	23.1	23.17	24
		1	50	22.22	22.26	22.42	24
		1	99	23.11	23.23	23.18	24
		50	0	21.98	22.05	22.07	23
		50	25	21.88	21.88	21.95	23
		50	50	21.97	22.04	22	23
		100	0	21.99	22.01	22.04	23
	16QAM	1	0	22.20	22.19	22.29	23
		1	50	21.59	21.65	21.83	23
		1	99	22.11	22.29	22.23	23
		50	0	20.89	20.92	20.99	22
		50	25	20.79	20.82	20.82	22
		50	50	20.85	20.97	20.89	22
		100	0	20.90	20.85	20.93	22
	64QAM	1	0	21.22	21.19	21.24	22
		1	50	20.29	20.28	20.44	22
		1	99	21.15	21.27	21.19	22
		50	0	20.01	20.06	20.11	21
		50	25	19.98	19.97	19.98	21
		50	50	20.06	20.06	20.05	21
		100	0	20.08	20.01	20.05	21
LTE Band 41 Hotspot on+sensor off				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40165	40690	41215	
5MHz	QPSK	1	0	20.57	20.50	20.52	21.5
		1	13	19.54	19.55	19.73	21.5
		1	24	20.44	20.51	20.43	21.5
		12	0	20.36	20.42	20.46	21.5
		12	6	20.22	20.31	20.23	21.5
		12	13	20.34	20.40	20.34	21.5
		25	0	20.30	20.39	20.43	21.5
	16QAM	1	0	20.52	20.47	20.73	21.5
		1	13	20.07	20.10	20.16	21.5
		1	24	20.55	20.60	20.61	21.5
		12	0	20.22	20.29	20.38	21.5
		12	6	20.17	20.23	20.23	21.5
		12	13	20.23	20.33	20.27	21.5
		25	0	20.26	20.32	20.28	21.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				40190	40690	41190		
	64QAM	1	0	20.42	20.31	20.42	21.5	
		1	13	19.44	19.45	19.6	21.5	
		1	24	20.31	20.37	20.24	21.5	
		12	0	20.21	20.32	20.28	21.5	
		12	6	20.12	20.14	20.04	21.5	
		12	13	20.18	20.29	20.21	21.5	
		25	0	20.11	20.27	20.24	21.5	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				40215	40690	41165		
10MHz	QPSK	1	0	20.59	20.55	20.56	21.5	
		1	25	19.58	19.59	19.76	21.5	
		1	49	20.49	20.54	20.49	21.5	
		25	0	20.41	20.45	20.49	21.5	
		25	13	20.26	20.36	20.28	21.5	
		25	25	20.36	20.42	20.37	21.5	
		50	0	20.36	20.41	20.45	21.5	
	16QAM	1	0	20.55	20.50	20.79	21.5	
		1	25	20.12	20.15	20.20	21.5	
		1	49	20.57	20.64	20.65	21.5	
		25	0	20.24	20.35	20.42	21.5	
		25	13	20.22	20.28	20.25	21.5	
		25	25	20.29	20.37	20.32	21.5	
		50	0	20.30	20.37	20.34	21.5	
	64QAM	1	0	20.4	20.35	20.43	21.5	
		1	25	19.41	19.45	19.63	21.5	
		1	49	20.37	20.42	20.35	21.5	
		25	0	20.3	20.27	20.33	21.5	
		25	13	20.09	20.24	20.13	21.5	
		25	25	20.2	20.31	20.18	21.5	
		50	0	20.19	20.28	20.28	21.5	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					40215	40690	41165	
	15MHz	QPSK	1	0	20.61	20.60	20.61	21.5
			1	38	19.61	19.63	19.81	21.5
			1	74	20.52	20.59	20.52	21.5
			36	0	20.43	20.50	20.54	21.5
			36	18	20.31	20.40	20.34	21.5
36			39	20.41	20.46	20.43	21.5	
75			0	20.41	20.47	20.47	21.5	
16QAM		1	0	20.59	20.54	20.81	21.5	
		1	38	20.18	20.18	20.24	21.5	
		1	74	20.60	20.66	20.71	21.5	
		36	0	20.30	20.41	20.46	21.5	
		36	18	20.26	20.31	20.29	21.5	
		36	39	20.33	20.40	20.34	21.5	
		75	0	20.33	20.41	20.36	21.5	
64QAM		1	0	20.51	20.4	20.47	21.5	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				40240	40690	41140		
20MHz	QPSK	1	38	19.48	19.45	19.62	21.5	
		1	74	20.39	20.43	20.35	21.5	
		36	0	20.25	20.3	20.38	21.5	
		36	18	20.19	20.28	20.2	21.5	
		36	39	20.28	20.27	20.28	21.5	
		75	0	20.28	20.29	20.34	21.5	
	16QAM	16QAM	1	0	20.66	20.63	20.63	21.5
			1	50	19.65	19.66	19.85	21.5
			1	99	20.56	20.61	20.55	21.5
			50	0	20.48	20.53	20.57	21.5
			50	25	20.36	20.45	20.39	21.5
			50	50	20.46	20.51	20.46	21.5
	64QAM	64QAM	100	0	20.43	20.5	20.52	21.5
			1	0	20.65	20.59	20.84	21.5
			1	50	20.20	20.24	20.26	21.5
			1	99	20.63	20.68	20.75	21.5
			50	0	20.36	20.46	20.49	21.5
			50	25	20.30	20.34	20.35	21.5
	64QAM	64QAM	50	50	20.38	20.43	20.39	21.5
			100	0	20.37	20.44	20.40	21.5
			1	0	20.48	20.46	20.53	21.5
1			50	19.49	19.46	19.71	21.5	
1			99	20.43	20.48	20.38	21.5	
50			0	20.31	20.39	20.45	21.5	
64QAM	64QAM	50	25	20.2	20.28	20.24	21.5	
		50	50	20.33	20.36	20.3	21.5	
		100	0	20.26	20.33	20.34	21.5	

Table 13: Conducted Power Of LTE

8.1.2 Conducted Power of Second Antenna

8.1.2.1 Conducted Power Of GSM

GSM 850 Receiver on(Left head)										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	29.49	29.62	29.61	30.6	-9.19	20.3	20.43	20.42	21.41
GPRS/EGPRS (GMSK)	1 TX Slot	29.51	29.6	29.63	30.6	-9.19	20.32	20.41	20.44	21.41
	2 TX Slots	27.5	27.54	27.52	29	-6.18	21.32	21.36	21.34	22.82
	3 TX Slots	25.33	25.36	25.34	27	-4.42	20.91	20.94	20.92	22.58
	4 TX Slots	23.35	23.36	23.43	24.6	-3.17	20.18	20.19	20.26	21.43
EGPRS(8PSK)	1 TX Slot	23.94	24.05	24.16	25	-9.19	14.75	14.86	14.97	15.81
	2 TX Slots	21.88	22.02	22.05	23	-6.18	15.7	15.84	15.87	16.82
	3 TX Slots	19.74	19.78	19.89	21	-4.42	15.32	15.36	15.47	16.58
	4 TX Slots	17.54	17.66	17.77	18.5	-3.17	14.37	14.49	14.6	15.33
GSM 850 Receiver on(Right head)										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	29.54	29.59	29.66	30.6	-9.19	20.35	20.4	20.47	21.41
GPRS/EGPRS (GMSK)	1 TX Slot	29.58	29.64	29.69	30.6	-9.19	20.39	20.45	20.5	21.41
	2 TX Slots	27.44	27.53	27.51	29	-6.18	21.26	21.35	21.33	22.82
	3 TX Slots	25.28	25.43	25.41	27	-4.42	20.86	21.01	20.99	22.58
	4 TX Slots	23.38	23.51	23.37	24.6	-3.17	20.21	20.34	20.2	21.43
EGPRS(8PSK)	1 TX Slot	23.94	24.1	24.13	25	-9.19	14.75	14.91	14.94	15.81
	2 TX Slots	21.84	21.94	22.02	23	-6.18	15.66	15.76	15.84	16.82
	3 TX Slots	19.73	19.84	19.97	21	-4.42	15.31	15.42	15.55	16.58
	4 TX Slots	17.51	17.72	17.81	18.5	-3.17	14.34	14.55	14.64	15.33
GSM 850 Receiver off(Body Scene)										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	32.92	33.05	33.19	33.6	-9.19	23.73	23.86	24	24.41
GPRS/EGPRS (GMSK)	1 TX Slot	33.94	33.06	33.21	33.6	-9.19	24.75	23.87	24.02	24.41
	2 TX Slots	31.01	31.13	31.22	32	-6.18	24.83	24.95	25.04	25.82
	3 TX Slots	28.69	28.62	28.64	30	-4.42	24.27	24.2	24.22	25.58
	4 TX Slots	26.21	26.25	26.28	27.6	-3.17	23.04	23.08	23.11	24.43
EGPRS(8PSK)	1 TX Slot	27.18	27.24	27.35	28	-9.19	17.99	18.05	18.16	18.81
	2 TX Slots	24.59	24.66	24.72	26	-6.18	18.41	18.48	18.54	19.82
	3 TX Slots	22.51	22.61	22.66	24	-4.42	18.09	18.19	18.24	19.58
	4 TX Slots	19.85	19.98	20.03	21.5	-3.17	16.68	16.81	16.86	18.33
GSM 850 Receiver on(Left head) + WiFi on/Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	26.71	26.77	26.78	27.6	-9.19	17.52	17.58	17.59	18.41
GPRS/EGPRS (GMSK)	1 TX Slot	26.71	26.75	26.79	27.6	-9.19	17.52	17.56	17.6	18.41
	2 TX Slots	24.98	24.89	24.86	26	-6.18	18.8	18.71	18.68	19.82
	3 TX Slots	22.85	22.81	22.82	24	-4.42	18.43	18.39	18.4	19.58
	4 TX Slots	19.99	20.17	20.21	21.6	-3.17	16.82	17	17.04	18.43

EGPRS(8PSK)	1 TX Slot	21.08	21.24	21.33	22	-9.19	11.89	12.05	12.14	12.81
	2 TX Slots	18.98	19.03	19.08	20	-6.18	12.8	12.85	12.9	13.82
	3 TX Slots	16.86	16.96	17.13	18	-4.42	12.44	12.54	12.71	13.58
	4 TX Slots	14.42	14.52	14.96	15.5	-3.17	11.25	11.35	11.79	12.33
GSM 850 Receiver on(Right head) + WiFi on/Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	26.69	26.75	26.77	27.6	-9.19	17.5	17.56	17.58	18.41
GPRS/EGPRS (GMSK)	1 TX Slot	26.7	26.76	26.81	27.6	-9.19	17.51	17.57	17.62	18.41
	2 TX Slots	24.91	24.97	24.95	26	-6.18	18.73	18.79	18.77	19.82
	3 TX Slots	22.97	22.88	22.84	24	-4.42	18.55	18.46	18.42	19.58
	4 TX Slots	19.91	20.07	20.13	21.6	-3.17	16.74	16.9	16.96	18.43
EGPRS(8PSK)	1 TX Slot	21.17	21.25	21.34	22	-9.19	11.98	12.06	12.15	12.81
	2 TX Slots	18.92	29.05	19.19	20	-6.18	12.74	22.87	13.01	13.82
	3 TX Slots	16.8	16.95	17.04	18	-4.42	12.38	12.53	12.62	13.58
	4 TX Slots	14.31	14.42	14.55	15.5	-3.17	11.14	11.25	11.38	12.33
GSM 850 Receiver off + WiFi on/Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		128	190	251			128	190	251	
GSM(GMSK)	GSM	29.73	29.77	29.78	30.6	-9.19	20.54	20.58	20.59	21.41
GPRS/EGPRS (GMSK)	1 TX Slot	29.78	29.82	29.85	30.6	-9.19	20.59	20.63	20.66	21.41
	2 TX Slots	27.88	27.94	27.92	29	-6.18	21.7	21.76	21.74	22.82
	3 TX Slots	25.87	25.79	25.79	27	-4.42	21.45	21.37	21.37	22.58
	4 TX Slots	23.33	23.32	23.34	24.6	-3.17	20.16	20.15	20.17	21.43
EGPRS(8PSK)	1 TX Slot	23.88	23.99	24.04	25	-9.19	14.69	14.8	14.85	15.81
	2 TX Slots	21.79	21.88	22.01	23	-6.18	15.61	15.7	15.83	16.82
	3 TX Slots	19.67	19.79	19.85	21	-4.42	15.25	15.37	15.43	16.58
	4 TX Slots	17.21	17.22	17.27	18.5	-3.17	14.04	14.05	14.1	15.33

GSM 1900 Receiver on(Left head)										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	27.92	27.96	27.95	28.5	-9.19	18.73	18.77	18.76	19.31
GPRS/EGPRS (GMSK)	1 TX Slot	27.88	27.93	27.92	28.5	-9.19	18.69	18.74	18.73	19.31
	2 TX Slots	25.76	25.78	25.79	26.5	-6.18	19.58	19.6	19.61	20.32
	3 TX Slots	23.6	23.65	23.56	24.5	-4.42	19.18	19.23	19.14	20.08
	4 TX Slots	21.43	21.47	21.45	22.5	-3.17	18.26	18.3	18.28	19.33
EGPRS(8PSK)	1 TX Slot	23.89	23.91	23.96	24.5	-9.19	14.7	14.72	14.77	15.31
	2 TX Slots	21.58	21.65	21.64	22.5	-6.18	15.4	15.47	15.46	16.32
	3 TX Slots	19.42	19.53	19.6	20.5	-4.42	15	15.11	15.18	16.08
	4 TX Slots	16.6	16.66	16.75	18	-3.17	13.43	13.49	13.58	14.83
GSM 1900 Receiver on(Right head)										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	26.94	26.98	26.95	27.5	-9.19	17.75	17.79	17.76	18.31
GPRS/EGPRS (GMSK)	1 TX Slot	26.89	26.96	26.92	27.5	-9.19	17.7	17.77	17.73	18.31
	2 TX Slots	24.69	24.77	24.79	25.5	-6.18	18.51	18.59	18.61	19.32
	3 TX Slots	22.61	22.64	22.59	23.5	-4.42	18.19	18.22	18.17	19.08
	4 TX Slots	20.46	20.47	20.41	21.5	-3.17	17.29	17.3	17.24	18.33
EGPRS(8PSK)	1 TX Slot	22.76	22.78	22.87	23.5	-9.19	13.57	13.59	13.68	14.31
	2 TX Slots	20.67	20.81	20.89	21.5	-6.18	14.49	14.63	14.71	15.32
	3 TX Slots	18.49	18.5	18.66	19.5	-4.42	14.07	14.08	14.24	15.08
	4 TX Slots	15.72	15.78	15.88	17	-3.17	12.55	12.61	12.71	13.83
GSM 1900 Receiver off(Body Scene)										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	30.92	30.91	30.95	31.5	-9.19	21.73	21.72	21.76	22.31
GPRS/EGPRS (GMSK)	1 TX Slot	30.93	30.94	30.96	31.5	-9.19	21.74	21.75	21.77	22.31
	2 TX Slots	28.84	28.85	28.87	29.5	-6.18	22.66	22.67	22.69	23.32
	3 TX Slots	26.58	26.63	26.58	27.5	-4.42	22.16	22.21	22.16	23.08
	4 TX Slots	23.97	24.04	24.03	25.5	-3.17	20.8	20.87	20.86	22.33
EGPRS(8PSK)	1 TX Slot	27.24	27.32	27.39	27.5	-9.19	18.05	18.13	18.2	18.31
	2 TX Slots	24.51	24.66	24.69	25.5	-6.18	18.33	18.48	18.51	19.32
	3 TX Slots	22.14	22.26	22.54	23.5	-4.42	17.72	17.84	18.12	19.08
	4 TX Slots	19.55	19.52	19.62	21	-3.17	16.38	16.35	16.45	17.83
GSM 1900 Receiver on(Left head) + WiFi on/Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	24.92	24.92	24.97	25.5	-9.19	15.73	15.73	15.78	16.31
GPRS/EGPRS (GMSK)	1 TX Slot	24.96	24.97	24.98	25.5	-9.19	15.77	15.78	15.79	16.31
	2 TX Slots	22.83	22.87	22.83	23.5	-6.18	16.65	16.69	16.65	17.32
	3 TX Slots	20.82	20.91	20.83	21.5	-4.42	16.4	16.49	16.41	17.08
	4 TX Slots	18.45	18.46	18.38	19.5	-3.17	15.28	15.29	15.21	16.33
EGPRS(8PSK)	1 TX Slot	20.85	20.91	20.93	21.5	-9.19	11.66	11.72	11.74	12.31

	2 TX Slots	18.42	18.55	18.65	19.5	-6.18	12.24	12.37	12.47	13.32
	3 TX Slots	16.22	16.34	16.45	17.5	-4.42	11.8	11.92	12.03	13.08
	4 TX Slots	13.48	13.63	13.62	15	-3.17	10.31	10.46	10.45	11.83
GSM 1900 Receiver on(Right head) + WiFi on/Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	23.92	23.95	23.94	24.5	-9.19	14.73	14.76	14.75	15.31
GPRS/EGPRS (GMSK)	1 TX Slot	23.95	23.96	23.96	24.5	-9.19	14.76	14.77	14.77	15.31
	2 TX Slots	21.87	21.92	21.87	22.5	-6.18	15.69	15.74	15.69	16.32
	3 TX Slots	19.95	19.92	19.98	20.5	-4.42	15.53	15.5	15.56	16.08
	4 TX Slots	17.88	18.03	18.14	18.5	-3.17	14.71	14.86	14.97	15.33
EGPRS(8PSK)	1 TX Slot	19.87	19.85	19.98	20.5	-9.19	10.68	10.66	10.79	11.31
	2 TX Slots	17.48	17.59	17.62	18.5	-6.18	11.3	11.41	11.44	12.32
	3 TX Slots	15.52	15.42	15.44	16.5	-4.42	11.1	11	11.02	12.08
	4 TX Slots	13.75	13.78	13.77	14	-3.17	10.58	10.61	10.6	10.83
GSM 1900 Receiver off + WiFi on/Hotspot on										
Burst Output Power(dBm)					Tune up	Division Factors	Frame-Average Output Power(dBm)			Tune up
Channel		512	661	810			512	661	810	
GSM(GMSK)	GSM	27.94	27.96	27.95	28.5	-9.19	18.75	18.77	18.76	19.31
GPRS/EGPRS (GMSK)	1 TX Slot	27.95	27.97	27.98	28.5	-9.19	18.76	18.78	18.79	19.31
	2 TX Slots	25.79	25.94	25.89	26.5	-6.18	19.61	19.76	19.71	20.32
	3 TX Slots	23.66	23.71	23.66	24.5	-4.42	19.24	19.29	19.24	20.08
	4 TX Slots	21.23	21.25	21.23	22.5	-3.17	18.06	18.08	18.06	19.33
EGPRS(8PSK)	1 TX Slot	23.89	23.93	23.96	24.5	-9.19	14.7	14.74	14.77	15.31
	2 TX Slots	21.68	21.64	21.69	22.5	-6.18	15.5	15.46	15.51	16.32
	3 TX Slots	19.37	19.45	19.44	20.5	-4.42	14.95	15.03	15.02	16.08
	4 TX Slots	16.55	16.71	16.75	18	-3.17	13.38	13.54	13.58	14.83

Table 14: Conducted Power Of GSM

Note:

1) . CMU200 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

$$\text{Frame-averaged power} = 10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$$

3) . When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used

8.1.2.2 Conducted Power Of WCDMA

WCDMA Band II Receiver on(Left head)					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	18.88	18.89	18.77	19.5
	12.2kbps AMR	18.82	18.81	18.69	19.5
HSDPA	Subtest 1	18.44	18.42	18.32	19
	Subtest 2	17.92	17.92	17.85	18.5
	Subtest 3	16.93	16.93	16.83	17.5
	Subtest 4	16.92	16.91	16.83	17.5
HSUPA	Subtest 1	17.47	17.43	17.35	18
	Subtest 2	14.89	14.92	14.86	15.5
	Subtest 3	15.43	15.39	15.33	16
	Subtest 4	14.39	14.39	14.29	15
	Subtest 5	17.38	17.44	17.34	18
DC-HSDPA	Subtest 1	18.42	18.44	18.33	19
	Subtest 2	17.92	17.95	17.8	18.5
	Subtest 3	16.91	16.91	16.86	17.5
	Subtest 4	16.91	16.92	16.82	17.5
WCDMA Band II Receiver on(Right head)					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	17.36	17.41	17.28	18
	12.2kbps AMR	17.29	17.33	17.22	18
HSDPA	Subtest 1	16.87	16.95	16.82	17.5
	Subtest 2	16.43	16.49	16.3	17
	Subtest 3	15.42	15.48	15.33	16
	Subtest 4	15.4	15.43	15.36	16
HSUPA	Subtest 1	15.89	15.98	15.83	16.5
	Subtest 2	13.39	13.5	13.3	14
	Subtest 3	13.92	13.98	13.83	14.5
	Subtest 4	12.92	12.99	12.78	13.5
	Subtest 5	15.92	15.99	15.79	16.5
DC-HSDPA	Subtest 1	16.88	16.92	16.78	17.5
	Subtest 2	16.45	16.42	16.31	17
	Subtest 3	15.37	15.51	15.3	16
	Subtest 4	15.39	15.43	15.34	16
WCDMA Band II Receiver off (Body Scene)					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	22.67	22.73	22.54	23.5
	12.2kbps AMR	22.58	22.68	22.47	23.5
HSDPA	Subtest 1	22.22	22.28	22.06	23
	Subtest 2	21.77	21.83	21.62	22.5
	Subtest 3	20.74	20.75	20.61	21.5
	Subtest 4	20.75	20.74	20.59	21.5

HSUPA	Subtest 1	21.23	21.24	21.13	22
	Subtest 2	18.7	18.77	18.58	19.5
	Subtest 3	19.2	19.29	19.12	20
	Subtest 4	18.21	18.27	18.08	19
	Subtest 5	21.25	21.24	21.09	22
DC-HSDPA	Subtest 1	22.26	22.27	22.1	23
	Subtest 2	21.75	21.77	21.63	22.5
	Subtest 3	20.7	20.76	20.6	21.5
	Subtest 4	20.73	20.77	20.58	21.5
WCDMA Band II Receiver on(Left head) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	15.35	15.32	15.26	16
	12.2kbps AMR	15.28	15.26	15.16	16
HSDPA	Subtest 1	14.94	14.83	14.78	15.5
	Subtest 2	14.38	14.35	14.3	15
	Subtest 3	13.44	13.32	13.31	14
	Subtest 4	13.38	13.42	13.31	14
HSUPA	Subtest 1	13.9	13.92	13.86	14.5
	Subtest 2	11.45	11.36	11.28	12
	Subtest 3	11.94	11.86	11.85	12.5
	Subtest 4	10.95	10.87	10.78	11.5
	Subtest 5	13.9	13.87	13.86	14.5
DC-HSDPA	Subtest 1	14.88	14.92	14.85	15.5
	Subtest 2	14.42	14.33	14.28	15
	Subtest 3	13.39	13.36	13.34	14
	Subtest 4	13.44	13.38	13.34	14
WCDMA Band II Receiver on(Right head) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					
Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	13.8	13.81	13.73	14.5
	12.2kbps AMR	13.71	13.73	13.64	14.5
HSDPA	Subtest 1	13.35	13.35	13.26	14
	Subtest 2	12.83	12.84	12.78	13.5
	Subtest 3	11.84	11.86	11.75	12.5
	Subtest 4	11.88	11.9	11.81	12.5
HSUPA	Subtest 1	12.33	12.38	12.33	13
	Subtest 2	9.9	9.85	9.74	10.5
	Subtest 3	10.33	10.38	10.33	11
	Subtest 4	9.4	9.37	9.3	10
	Subtest 5	12.39	12.34	12.29	13
DC-HSDPA	Subtest 1	13.34	13.32	13.28	14
	Subtest 2	12.9	12.88	12.8	13.5
	Subtest 3	11.84	11.88	11.74	12.5
	Subtest 4	11.84	11.89	11.8	12.5
WCDMA Band II Receiver off (Body Scene) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					

Channel		9262	9400	9538	Tune up
WCDMA	12.2kbps RMC	19.22	19.23	19.14	20
	12.2kbps AMR	19.13	19.14	19.04	20
HSDPA	Subtest 1	18.79	18.79	18.72	19.5
	Subtest 2	18.3	18.33	18.23	19
	Subtest 3	17.28	17.26	17.19	18
	Subtest 4	17.3	17.31	17.2	18
HSUPA	Subtest 1	17.78	17.79	17.73	18.5
	Subtest 2	15.3	15.27	15.21	16
	Subtest 3	15.74	15.79	15.72	16.5
	Subtest 4	14.77	14.81	14.69	15.5
	Subtest 5	17.74	17.78	17.7	18.5
DC-HSDPA	Subtest 1	18.76	18.83	18.69	19.5
	Subtest 2	18.32	18.32	18.2	19
	Subtest 3	17.32	17.29	17.19	18
	Subtest 4	17.22	17.31	17.21	18

WCDMA Band IV Receiver on(Left head)					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	19.98	20.02	20.01	20.5
	12.2kbps AMR	19.92	19.94	19.92	20.5
HSDPA	Subtest 1	19.52	19.52	19.56	20
	Subtest 2	19.04	19.1	19.07	19.5
	Subtest 3	18.57	18.53	18.54	19
	Subtest 4	18.52	18.56	18.53	19
HSUPA	Subtest 1	18	18.07	18.05	18.5
	Subtest 2	16.06	16.04	16.1	16.5
	Subtest 3	16.54	16.57	16.56	17
	Subtest 4	15.5	15.55	15.54	16
	Subtest 5	18.06	18.08	18.1	18.5
DC-HSDPA	Subtest 1	19.53	19.58	19.52	20
	Subtest 2	18.99	19.09	19.07	19.5
	Subtest 3	18.51	18.59	18.59	19
	Subtest 4	18.53	18.53	18.61	19
WCDMA Band IV Receiver on(Right head)					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	18.5	18.52	18.51	19
	12.2kbps AMR	18.41	18.44	18.44	19
HSDPA	Subtest 1	18.08	18.05	18.05	18.5
	Subtest 2	17.56	17.59	17.57	18
	Subtest 3	17.05	17.04	17.05	17.5
	Subtest 4	17.03	17.04	17.03	17.5
HSUPA	Subtest 1	16.52	16.59	16.58	17
	Subtest 2	14.51	14.53	14.52	15
	Subtest 3	15.06	15.06	15.06	15.5

	Subtest 4	14.04	14.04	14.04	14.5
	Subtest 5	16.56	16.55	16.56	17
DC-HSDPA	Subtest 1	18.07	18.02	18.09	18.5
	Subtest 2	17.59	17.54	17.56	18
	Subtest 3	17.07	17.1	17.04	17.5
	Subtest 4	17.02	17.03	17.02	17.5
WCDMA Band IV ReceVer off (Body Scene)					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	22.26	22.33	22.37	23
	12.2kbps AMR	22.17	22.27	22.32	23
HSDPA	Subtest 1	21.77	21.83	21.94	22.5
	Subtest 2	21.27	21.36	21.46	22
	Subtest 3	20.78	20.87	20.9	21.5
	Subtest 4	20.86	20.86	20.9	21.5
HSUPA	Subtest 1	20.3	20.38	20.47	21
	Subtest 2	18.35	18.37	18.46	19
	Subtest 3	18.79	18.92	18.9	19.5
	Subtest 4	17.84	17.85	17.94	18.5
	Subtest 5	20.34	20.38	20.39	21
DC-HSDPA	Subtest 1	21.78	21.84	21.94	22.5
	Subtest 2	21.28	21.38	21.38	22
	Subtest 3	20.79	20.85	20.9	21.5
	Subtest 4	20.78	20.93	20.91	21.5
WCDMA Band IV Receiver on(Left head) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	17.13	17.15	17.04	17.5
	12.2kbps AMR	17.07	17.09	16.98	17.5
HSDPA	Subtest 1	16.73	16.7	16.56	17
	Subtest 2	16.2	16.24	16.1	16.5
	Subtest 3	15.65	15.75	15.56	16
	Subtest 4	15.67	15.68	15.55	16
HSUPA	Subtest 1	15.16	15.17	15.07	15.5
	Subtest 2	13.14	13.2	13.12	13.5
	Subtest 3	13.7	13.68	13.58	14
	Subtest 4	12.7	12.69	12.63	13
	Subtest 5	15.22	15.23	15.08	15.5
DC-HSDPA	Subtest 1	16.68	16.73	16.63	17
	Subtest 2	16.18	16.18	16.08	16.5
	Subtest 3	15.7	15.66	15.62	16
	Subtest 4	15.67	15.67	15.58	16
WCDMA Band IV Receiver on(Right head) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	15.58	15.54	15.53	16
	12.2kbps AMR	15.51	15.47	15.48	16

HSDPA	Subtest 1	15.13	15.08	15.03	15.5
	Subtest 2	14.59	14.57	14.59	15
	Subtest 3	14.14	14.1	14.07	14.5
	Subtest 4	14.09	14.13	14.05	14.5
HSUPA	Subtest 1	13.58	13.63	13.55	14
	Subtest 2	11.64	11.63	11.54	12
	Subtest 3	12.1	12.05	12.1	12.5
	Subtest 4	11.16	11.05	11.07	11.5
	Subtest 5	13.64	13.57	13.61	14
DC-HSDPA	Subtest 1	15.16	15.13	15.12	15.5
	Subtest 2	14.68	14.58	14.55	15
	Subtest 3	14.11	14.06	14.09	14.5
	Subtest 4	14.16	14.11	14.05	14.5
WCDMA Band IV Receiver off (Body Scene) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					
Channel		1312	1412	1513	Tune up
WCDMA	12.2kbps RMC	19.26	19.41	19.38	20
	12.2kbps AMR	19.18	19.32	19.3	20
HSDPA	Subtest 1	18.83	18.97	18.93	19.5
	Subtest 2	18.33	18.43	18.45	19
	Subtest 3	17.83	17.96	17.91	18.5
	Subtest 4	17.83	17.94	17.97	18.5
HSUPA	Subtest 1	17.29	17.42	17.38	18
	Subtest 2	15.32	15.41	15.41	16
	Subtest 3	15.84	15.99	15.98	16.5
	Subtest 4	14.82	14.99	14.97	15.5
	Subtest 5	17.27	17.47	17.46	18
DC-HSDPA	Subtest 1	18.79	19	18.93	19.5
	Subtest 2	18.32	18.51	18.44	19
	Subtest 3	17.82	17.96	17.93	18.5
	Subtest 4	17.79	17.93	17.98	18.5

WCDMA Band V Receiver on(Left head)					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	19.4	19.29	19.3	20.5
	12.2kbps AMR	19.33	19.21	19.23	20.5
HSDPA	Subtest 1	19.3	19.14	19.18	20.5
	Subtest 2	18.99	18.86	18.85	20
	Subtest 3	18.46	18.36	18.34	19.5
	Subtest 4	18.49	18.38	18.36	19.5
HSUPA	Subtest 1	18.96	18.86	18.86	20
	Subtest 2	16.5	16.32	16.38	17.5
	Subtest 3	17.44	17.31	17.37	18.5
	Subtest 4	16.46	16.32	16.39	17.5
	Subtest 5	17.96	17.85	17.83	19
DC-HSDPA	Subtest 1	19.28	19.19	19.23	20.5

	Subtest 2	18.97	18.88	18.89	20
	Subtest 3	18.47	18.33	18.39	19.5
	Subtest 4	18.45	18.34	18.36	19.5
WCDMA Band V Receiver on(Right head)					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	19.4	19.29	19.3	20.5
	12.2kbps AMR	19.35	19.2	19.2	20.5
HSDPA	Subtest 1	19.3	19.15	19.18	20.5
	Subtest 2	18.99	18.79	18.81	20
	Subtest 3	18.45	18.3	18.37	19.5
	Subtest 4	18.41	18.31	18.35	19.5
HSUPA	Subtest 1	18.97	18.79	18.9	20
	Subtest 2	16.46	16.36	16.3	17.5
	Subtest 3	17.46	17.38	17.37	18.5
	Subtest 4	16.43	16.3	16.37	17.5
	Subtest 5	17.91	17.83	17.89	19
DC-HSDPA	Subtest 1	19.28	19.2	19.22	20.5
	Subtest 2	18.91	18.82	18.83	20
	Subtest 3	18.49	18.3	18.32	19.5
	Subtest 4	18.45	18.32	18.31	19.5
WCDMA Band V Receiver off (Body Scene)					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	23.35	23.28	23.32	24.5
	12.2kbps AMR	23.26	23.2	23.23	24.5
HSDPA	Subtest 1	23.27	23.17	23.17	24.5
	Subtest 2	22.94	22.83	22.91	24
	Subtest 3	22.41	22.38	22.39	23.5
	Subtest 4	22.42	22.33	22.39	23.5
HSUPA	Subtest 1	22.9	22.81	22.83	24
	Subtest 2	20.37	20.37	20.42	21.5
	Subtest 3	21.41	21.32	21.37	22.5
	Subtest 4	20.38	20.36	20.39	21.5
	Subtest 5	21.9	21.79	21.9	23
DC-HSDPA	Subtest 1	23.21	23.19	23.18	24.5
	Subtest 2	22.92	22.8	22.92	24
	Subtest 3	22.41	22.28	22.4	23.5
	Subtest 4	22.41	22.28	22.32	23.5
WCDMA Band V Receiver on(Left head) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	16.3	16.18	16.19	17.5
	12.2kbps AMR	16.23	16.09	16.12	17.5
HSDPA	Subtest 1	16.16	16.12	16.11	17.5
	Subtest 2	15.88	15.72	15.75	17
	Subtest 3	15.37	15.2	15.28	16.5

	Subtest 4	15.36	15.2	15.19	16.5
HSUPA	Subtest 1	15.86	15.75	15.69	17
	Subtest 2	13.35	13.18	13.21	14.5
	Subtest 3	14.39	14.22	14.26	15.5
	Subtest 4	13.32	13.22	13.21	14.5
	Subtest 5	14.84	14.73	14.69	16
DC-HSDPA	Subtest 1	16.21	16.1	16.11	17.5
	Subtest 2	15.85	15.71	15.76	17
	Subtest 3	15.37	15.24	15.24	16.5
	Subtest 4	15.35	15.21	15.21	16.5
WCDMA Band V Receiver on(Right head) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	16.31	16.17	16.23	17.5
	12.2kbps AMR	16.22	16.12	16.16	17.5
HSDPA	Subtest 1	16.18	16.06	16.17	17.5
	Subtest 2	15.89	15.68	15.8	17
	Subtest 3	15.33	15.22	15.27	16.5
	Subtest 4	15.34	15.17	15.33	16.5
HSUPA	Subtest 1	15.88	15.75	15.74	17
	Subtest 2	13.36	13.18	13.23	14.5
	Subtest 3	14.37	14.21	14.24	15.5
	Subtest 4	13.33	13.19	13.31	14.5
	Subtest 5	14.84	14.68	14.74	16
DC-HSDPA	Subtest 1	16.25	16.07	16.09	17.5
	Subtest 2	15.86	15.72	15.73	17
	Subtest 3	15.38	15.19	15.24	16.5
	Subtest 4	15.34	15.24	15.27	16.5
WCDMA Band V Receiver off (Body Scene) +WiFi on/Hotspot on					
Average Conducted Power(dBm)					
Channel		4132	4182	4233	Tune up
WCDMA	12.2kbps RMC	20.34	20.26	20.27	21.5
	12.2kbps AMR	20.25	20.17	20.2	21.5
HSDPA	Subtest 1	20.23	20.21	20.18	21.5
	Subtest 2	19.91	19.81	19.85	21
	Subtest 3	19.41	19.27	19.32	20.5
	Subtest 4	19.37	19.36	19.28	20.5
HSUPA	Subtest 1	19.92	19.86	19.81	21
	Subtest 2	17.37	17.33	17.35	18.5
	Subtest 3	18.41	18.27	18.3	19.5
	Subtest 4	17.39	17.35	17.34	18.5
	Subtest 5	18.91	18.84	18.85	20
DC-HSDPA	Subtest 1	20.28	20.12	20.13	21.5
	Subtest 2	19.91	19.81	19.84	21
	Subtest 3	19.37	19.29	19.35	20.5
	Subtest 4	19.43	19.33	19.34	20.5

Table 15: Conducted Power Of WCDMA

Note:

- 2) when the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

8.1.2.3 Conducted Power Of LTE

LTE Band 2 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	18.51	18.41	18.27	19.5
		1	2	17.88	17.89	17.78	19.5
		1	5	18.51	18.41	18.36	19.5
		3	0	18.4	18.36	18.26	19.5
		3	2	18.39	18.31	18.16	19.5
		3	3	18.39	18.37	18.27	19.5
		6	0	18.41	18.31	18.28	19.5
	16QAM	1	0	18.63	18.79	18.37	19.5
		1	2	18.43	18.4	18.29	19.5
		1	5	18.62	18.72	18.68	19.5
		3	0	18.38	18.33	18.16	19.5
		3	2	18.31	18.31	18.35	19.5
		3	3	18.49	18.36	18.33	19.5
		6	0	18.41	18.39	18.26	19.5
	64QAM	1	0	18.52	18.62	18.24	19.5
		1	2	18.41	18.38	18.18	19.5
		1	5	18.47	18.54	18.55	19.5
		3	0	18.28	18.24	18.01	19.5
		3	2	18.30	18.14	18.16	19.5
		3	3	18.46	18.23	18.33	19.5
		6	0	18.26	18.37	18.07	19.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	18.51	18.44	18.36	19.5
		1	7	18	17.83	18.38	19.5
		1	14	18.46	18.44	18.4	19.5
		8	0	18.39	18.27	18.24	19.5
		8	4	18.44	18.41	18.36	19.5
		8	7	18.44	18.42	18.37	19.5
		15	0	18.46	18.45	18.39	19.5
	16QAM	1	0	18.77	18.64	18.57	19.5
		1	7	18.58	18.62	18.07	19.5
		1	14	18.74	18.75	18.77	19.5
		8	0	18.38	18.33	18.38	19.5
		8	4	18.43	18.33	18.26	19.5
		8	7	18.31	18.34	18.24	19.5
		15	0	18.39	18.43	18.29	19.5
	64QAM	1	0	18.70	18.50	18.54	19.5
		1	7	18.54	18.50	17.89	19.5
		1	14	18.57	18.67	18.74	19.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18625	18900	19175		
5MHz	QPSK	8	0	18.24	18.17	18.29	19.5	
		8	4	18.28	18.22	18.14	19.5	
		8	7	18.25	18.24	18.21	19.5	
		15	0	18.34	18.41	18.13	19.5	
	16QAM	16QAM	1	0	18.45	18.43	18.36	19.5
			1	13	18.45	18.4	18.39	19.5
			1	24	18.44	18.36	18.35	19.5
			12	0	18.48	18.43	18.4	19.5
			12	6	18.49	18.43	18.36	19.5
			12	13	18.49	18.47	18.39	19.5
			25	0	18.42	18.37	18.33	19.5
	64QAM	64QAM	1	0	18.78	18.78	18.71	19.5
			1	13	18.75	18.77	18.65	19.5
			1	24	18.7	18.73	18.62	19.5
			12	0	18.5	18.46	18.36	19.5
			12	6	18.43	18.36	18.3	19.5
			12	13	18.41	18.43	18.33	19.5
			25	0	18.39	18.31	18.28	19.5
	64QAM	64QAM	1	0	18.69	18.66	18.63	19.5
			1	13	18.59	18.69	18.46	19.5
			1	24	18.56	18.57	18.48	19.5
			12	0	18.36	18.36	18.22	19.5
			12	6	18.28	18.22	18.17	19.5
			12	13	18.32	18.39	18.24	19.5
			25	0	18.26	18.27	18.12	19.5
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18650	18900	19150	
	10MHz	QPSK	1	0	18.48	18.4	18.38	19.5
1			25	18.31	18.26	18.09	19.5	
1			49	18.42	18.36	18.41	19.5	
25			0	18.48	18.43	18.43	19.5	
25			13	18.46	18.37	18.4	19.5	
25			25	18.49	18.34	18.37	19.5	
50			0	18.47	18.4	18.39	19.5	
16QAM		16QAM	1	0	18.74	18.7	18.64	19.5
			1	25	18.63	18.78	18.32	19.5
			1	49	18.66	18.7	18.66	19.5
			25	0	18.45	18.4	18.36	19.5
			25	13	18.39	18.36	18.32	19.5
			25	25	18.41	18.37	18.34	19.5
			50	0	18.38	18.32	18.3	19.5
64QAM		64QAM	1	0	18.73	18.64	18.57	19.5
			1	25	18.56	18.59	18.26	19.5
			1	49	18.48	18.63	18.60	19.5
			25	0	18.38	18.23	18.24	19.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	25	13	18.39	18.25	18.24	19.5
		25	25	18.26	18.34	18.19	19.5
		50	0	18.30	18.28	18.28	19.5
		1	0	18.43	18.34	18.33	19.5
		1	38	18.47	18.35	18.35	19.5
		1	74	18.39	18.27	18.28	19.5
		36	0	18.49	18.4	18.39	19.5
	36	18	18.45	18.41	18.38	19.5	
	36	39	18.41	18.36	18.36	19.5	
	75	0	18.43	18.36	18.42	19.5	
	16QAM	1	0	18.75	18.59	18.53	19.5
		1	38	18.63	18.58	18.62	19.5
		1	74	18.55	18.57	18.63	19.5
		36	0	18.45	18.41	18.33	19.5
		36	18	18.41	18.34	18.31	19.5
		36	39	18.4	18.34	18.34	19.5
		75	0	18.39	18.34	18.29	19.5
	64QAM	1	0	18.72	18.43	18.46	19.5
		1	38	18.60	18.56	18.56	19.5
		1	74	18.49	18.41	18.49	19.5
		36	0	18.40	18.35	18.26	19.5
		36	18	18.24	18.15	18.28	19.5
		36	39	18.36	18.31	18.25	19.5
		75	0	18.31	18.33	18.12	19.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
20MHz	QPSK	1	0	18.57	18.54	18.53	19.5
		1	50	18.29	18.29	18.23	19.5
		1	99	18.49	18.38	18.37	19.5
		50	0	18.49	18.42	18.38	19.5
		50	25	18.43	18.36	18.33	19.5
		50	50	18.48	18.38	18.36	19.5
		100	0	18.44	18.42	18.33	19.5
	16QAM	1	0	18.76	18.8	18.73	19.5
		1	50	18.45	18.3	18.17	19.5
		1	99	18.69	18.66	18.65	19.5
		50	0	18.44	18.4	18.35	19.5
		50	25	18.38	18.3	18.24	19.5
		50	50	18.4	18.29	18.29	19.5
		100	0	18.39	18.33	18.27	19.5
	64QAM	1	0	18.62	18.68	18.56	19.5
		1	50	18.42	18.28	18.04	19.5
		1	99	18.52	18.50	18.52	19.5
		50	0	18.34	18.31	18.30	19.5
		50	25	18.36	18.26	18.06	19.5

		50	50	18.40	18.12	18.25	19.5
		100	0	18.30	18.33	18.25	19.5

LTE Band 2 Receiver on(Right head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	17	16.93	16.86	18
		1	2	16.58	16.42	16.46	18
		1	5	17	16.9	16.89	18
		3	0	16.89	16.86	16.79	18
		3	2	16.95	16.79	16.66	18
		3	3	16.94	16.85	16.78	18
		6	0	16.89	16.94	16.84	18
	16QAM	1	0	17.2	17.18	17.13	18
		1	2	16.79	16.84	16.63	18
		1	5	17.21	17.08	17.12	18
		3	0	16.88	16.83	16.83	18
		3	2	16.89	16.62	16.88	18
		3	3	16.99	16.87	16.77	18
		6	0	16.95	16.74	16.86	18
	64QAM	1	0	17.11	17.00	17.01	18
		1	2	16.66	16.78	16.52	18
		1	5	17.15	16.97	16.95	18
		3	0	16.77	16.82	16.78	18
		3	2	16.72	16.57	16.84	18
		3	3	16.90	16.83	16.75	18
		6	0	16.92	16.69	16.84	18
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	16.96	16.94	16.86	18
		1	7	16.76	16.87	16.66	18
		1	14	16.96	16.91	16.91	18
		8	0	16.85	16.88	16.83	18
		8	4	16.91	16.82	16.81	18
		8	7	16.86	16.81	16.81	18
		15	0	16.9	16.87	16.83	18
	16QAM	1	0	17.21	17.2	17.11	18
		1	7	17.03	17.07	16.76	18
		1	14	17.22	17.13	17.28	18
		8	0	16.92	16.87	16.8	18
		8	4	16.85	16.81	16.8	18
		8	7	16.79	16.8	16.83	18
		15	0	16.94	16.85	16.78	18
	64QAM	1	0	17.05	17.11	17.01	18
		1	7	16.93	17.01	16.68	18
		1	14	17.13	17.10	17.15	18

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18625	18900	19175		
5MHz	QPSK	8	0	16.74	16.76	16.78	18	
		8	4	16.73	16.73	16.76	18	
		8	7	16.71	16.70	16.64	18	
		15	0	16.84	16.70	16.68	18	
		1	0	17.03	16.91	16.84	18	
		1	13	16.95	16.91	16.9	18	
		1	24	16.94	16.89	16.9	18	
	16QAM	12	0	17	16.97	16.88	18	
		12	6	16.99	16.9	16.83	18	
		12	13	16.97	16.92	16.88	18	
		25	0	17	16.93	16.86	18	
		1	0	17.32	17.17	17.12	18	
		1	13	17.16	17.24	17.11	18	
		1	24	17.16	17.14	17.18	18	
	64QAM	12	0	16.97	16.87	16.87	18	
		12	6	16.89	16.86	16.8	18	
		12	13	16.95	16.94	16.84	18	
		25	0	16.91	16.86	16.84	18	
		1	0	17.17	17.16	17.08	18	
		1	13	17.12	17.20	16.98	18	
		1	24	17.06	17.06	17.14	18	
	10MHz	QPSK	12	0	16.81	16.81	16.75	18
			12	6	16.88	16.75	16.63	18
			12	13	16.94	16.87	16.79	18
25			0	16.79	16.78	16.83	18	
1			0	16.98	16.94	16.83	18	
1			25	16.85	16.86	16.81	18	
1			49	16.89	16.86	16.87	18	
16QAM		25	0	17	16.9	16.88	18	
		25	13	16.93	16.86	16.87	18	
		25	25	16.98	16.91	16.88	18	
		50	0	16.95	16.88	16.88	18	
		1	0	17.15	17.23	17.14	18	
		1	25	17	17.2	16.96	18	
		1	49	17.16	17.1	17.19	18	
64QAM		25	0	16.91	16.88	16.89	18	
		25	13	16.88	16.83	16.85	18	
		25	25	16.91	16.84	16.81	18	
		50	0	16.88	16.87	16.79	18	
		1	0	17.00	17.18	17.06	18	
		1	25	16.97	17.14	16.88	18	
		1	49	17.08	16.94	17.07	18	
			25	0	16.84	16.88	16.83	18

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
		18675	18900	19125				
15MHz	QPSK	25	13	16.83	16.74	16.74	18	
		25	25	16.81	16.75	16.65	18	
		50	0	16.80	16.82	16.70	18	
		1	0	16.92	16.94	16.86	18	
		1	38	17.02	16.91	16.88	18	
		1	74	16.91	16.82	16.83	18	
		36	0	16.98	16.97	16.96	18	
	16QAM	36	18	16.93	16.95	16.92	18	
		36	39	16.98	16.89	16.88	18	
		75	0	17	16.9	16.88	18	
		1	0	17.37	17.16	17.1	18	
		1	38	17.25	17.21	17.22	18	
		1	74	17.26	17.1	17.1	18	
		36	0	16.95	16.9	16.84	18	
	64QAM	36	18	16.91	16.85	16.81	18	
		36	39	16.9	16.87	16.8	18	
		75	0	16.88	16.85	16.85	18	
		1	0	17.32	17.02	16.96	18	
		1	38	17.14	17.11	17.15	18	
		1	74	17.09	16.91	16.92	18	
		36	0	16.84	16.89	16.77	18	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18700	18900	19100	
	20MHz	QPSK	1	0	17.08	17.06	16.99	18
1			50	16.79	16.8	16.71	18	
1			99	17.01	16.92	16.9	18	
50			0	17.02	16.97	16.9	18	
50			25	16.93	16.9	16.87	18	
50			50	16.96	16.9	16.91	18	
100			0	16.94	16.91	16.87	18	
16QAM		1	0	17.4	17.29	17.14	18	
		1	50	17.17	17.05	17	18	
		1	99	17.2	17.2	17.21	18	
		50	0	16.93	16.89	16.79	18	
		50	25	16.83	16.87	16.77	18	
		50	50	16.88	16.84	16.82	18	
		100	0	16.88	16.86	16.8	18	
64QAM		1	0	17.27	17.25	17.09	18	
		1	50	17.14	16.87	16.82	18	
		1	99	17.16	17.10	17.17	18	
		50	0	16.80	16.84	16.69	18	
	50	25	16.64	16.86	16.59	18		

		50	50	16.69	16.79	16.75	18
		100	0	16.86	16.78	16.75	18

LTE Band 2 Receiver off (Body Scene)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	21.97	21.92	21.82	23
		1	2	21.52	21.44	21.71	23
		1	5	21.97	21.93	21.9	23
		3	0	21.8	21.84	21.76	23
		3	2	21.81	21.63	21.66	23
		3	3	21.72	21.77	21.74	23
		6	0	22.01	21.84	21.81	23
	16QAM	1	0	22.26	22.26	22.23	23
		1	2	21.93	22.01	22.01	23
		1	5	22.22	22.26	22.06	23
		3	0	21.98	21.87	21.8	23
		3	2	21.77	21.89	21.78	23
		3	3	21.95	21.87	21.78	23
		6	0	20.89	20.87	20.83	22
	64QAM	1	0	21.22	21.19	21.20	22
		1	2	20.91	20.91	21.00	22
		1	5	21.20	21.26	21.01	22
		3	0	20.93	20.89	20.81	22
		3	2	20.82	20.85	20.68	22
		3	3	20.98	20.84	20.82	22
		6	0	19.85	19.82	19.81	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	21.99	21.95	21.87	23
		1	7	21.68	21.78	21.56	23
		1	14	21.93	21.89	21.89	23
		8	0	21.95	21.89	21.84	23
		8	4	21.89	21.81	21.82	23
		8	7	21.9	21.9	21.81	23
		15	0	21.95	21.95	21.77	23
	16QAM	1	0	22.33	22.22	22.12	23
		1	7	21.4	21.61	21.56	23
		1	14	22.25	22.17	22.25	23
		8	0	20.9	20.84	20.75	22
		8	4	20.93	20.88	20.77	22
		8	7	20.94	20.91	20.8	22
		15	0	20.92	20.87	20.8	22
	64QAM	1	0	21.21	21.24	21.12	22
		1	7	20.45	20.55	20.54	22
		1	14	21.29	21.03	21.15	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18625	18900	19175		
5MHz	QPSK	8	0	19.91	19.84	19.65	21	
		8	4	19.89	19.79	19.79	21	
		8	7	19.97	19.77	19.78	21	
		15	0	19.91	19.90	19.66	21	
	16QAM	QPSK	1	0	21.97	21.91	21.87	23
			1	13	21.94	21.9	21.84	23
			1	24	21.94	21.87	21.92	23
			12	0	21.97	21.98	21.9	23
			12	6	21.92	21.86	21.87	23
			12	13	21.98	21.92	21.87	23
		16QAM	25	0	21.96	21.9	21.83	23
			1	0	22.18	22.12	22.12	23
			1	13	22.07	22.14	22.06	23
			1	24	22.15	22.09	22.09	23
			12	0	20.91	20.86	20.84	22
			12	6	20.87	20.85	20.76	22
	64QAM	12	13	20.93	20.87	20.83	22	
		25	0	20.91	20.86	20.81	22	
		1	0	21.13	21.04	21.04	22	
		1	13	20.95	21.03	21.09	22	
		1	24	21.09	20.97	20.99	22	
		12	0	19.93	19.88	19.80	21	
		12	6	19.89	19.89	19.67	21	
	10MHz	QPSK	12	13	19.85	19.75	19.81	21
			25	0	19.90	19.85	19.73	21
			1	0	21.97	21.9	21.8	23
			1	25	21.93	21.89	21.77	23
			1	49	21.9	21.83	21.91	23
25			0	21.95	21.95	21.89	23	
25			13	21.85	21.83	21.78	23	
16QAM		25	25	21.92	21.83	21.81	23	
		50	0	21.95	21.85	21.78	23	
		1	0	22.12	22.09	22.03	23	
		1	25	22.06	22.08	21.98	23	
		1	49	22.13	22	22.07	23	
		25	0	20.85	20.79	20.79	22	
		25	13	20.8	20.81	20.7	22	
64QAM		25	25	20.84	20.82	20.8	22	
		50	0	20.89	20.82	20.79	22	
		1	0	21.07	21.02	20.96	22	
		1	25	20.94	21.01	21.05	22	
		1	49	21.01	20.9	20.97	22	
		25	0	19.93	19.83	19.77	21	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18675	18900	19125		
15MHz	QPSK	25	13	19.86	19.86	19.6	21	
		25	25	19.79	19.73	19.76	21	
		50	0	19.84	19.78	19.7	21	
		1	0	21.97	21.93	21.83	23	
		1	38	21.97	21.9	21.87	23	
		1	74	21.89	21.8	21.85	23	
		36	0	22.01	21.99	21.89	23	
	16QAM	36	18	21.98	21.92	21.93	23	
		36	39	21.95	21.92	21.92	23	
		75	0	21.98	21.91	21.91	23	
		1	0	22.23	22.18	22.17	23	
		1	38	22.32	22.29	22.02	23	
		1	74	22.21	22.13	22.01	23	
		36	0	20.98	20.89	20.83	22	
	64QAM	36	18	20.92	20.87	20.82	22	
		36	39	20.9	20.84	20.84	22	
		75	0	20.88	20.83	20.84	22	
		1	0	21.11	21.16	21.08	22	
		1	38	21.31	21.21	20.90	22	
		1	74	21.24	21.14	20.88	22	
		36	0	19.95	19.94	19.86	21	
	20MHz	QPSK	36	18	19.88	19.88	19.84	21
			36	39	19.94	19.78	19.77	21
			75	0	19.84	19.71	19.77	21
1			0	22.31	22.32	22.12	23	
1			50	21.94	21.96	22.08	23	
1			99	22.23	22.31	22.17	23	
50			0	20.95	20.89	20.86	22	
16QAM		50	25	20.85	20.84	20.79	22	
		50	50	20.91	20.82	20.85	22	
		100	0	20.88	20.85	20.81	22	
		1	0	21.29	21.34	21.10	22	
		1	50	20.89	20.83	21.10	22	
		1	99	21.16	21.31	21.08	22	
		50	0	19.89	19.85	19.79	21	
64QAM		50	25	19.85	19.74	19.83	21	
		1	0	22.1	22.05	21.97	23	
		1	50	21.73	21.46	21.58	23	
20MHz		QPSK	1	99	21.99	21.95	21.91	23
			50	0	22.01	21.94	21.88	23
			50	25	21.94	21.88	21.83	23
			50	50	21.97	21.93	21.89	23
			100	0	21.96	21.88	21.88	23
			1	0	22.31	22.32	22.12	23
			1	50	21.94	21.96	22.08	23
	16QAM	1	99	22.23	22.31	22.17	23	
		50	0	20.95	20.89	20.86	22	
		50	25	20.85	20.84	20.79	22	
		50	50	20.91	20.82	20.85	22	
		100	0	20.88	20.85	20.81	22	
		1	0	21.29	21.34	21.10	22	
		1	50	20.89	20.83	21.10	22	
	64QAM	1	99	21.16	21.31	21.08	22	
		50	0	19.89	19.85	19.79	21	
		50	25	19.85	19.74	19.83	21	

		50	50	19.82	19.77	19.78	21
		100	0	19.77	19.81	19.72	21

LTE Band 2 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	15.72	15.66	15.60	16.5
		1	2	16.06	15.82	15.76	16.5
		1	5	15.75	15.63	15.57	16.5
		3	0	15.75	15.70	15.45	16.5
		3	2	15.21	15.19	15.42	16.5
		3	3	15.58	15.52	15.47	16.5
		6	0	15.72	15.65	14.96	16.5
	16QAM	1	0	16.02	15.81	15.48	16.5
		1	2	15.36	15.65	14.74	16.5
		1	5	15.68	15.77	15.47	16.5
		3	0	15.75	15.40	15.42	16.5
		3	2	15.15	15.22	15.53	16.5
		3	3	15.77	15.60	15.54	16.5
		6	0	15.52	15.53	15.68	16.5
	64QAM	1	0	15.92	15.76	15.43	16.5
		1	2	15.34	15.50	14.58	16.5
		1	5	15.49	15.66	15.31	16.5
		3	0	15.59	15.37	15.33	16.5
		3	2	15.10	15.18	15.47	16.5
		3	3	15.73	15.55	15.52	16.5
		6	0	15.35	15.46	15.63	16.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	15.66	15.70	15.65	16.5
		1	7	14.42	16.27	15.01	16.5
		1	14	15.67	15.70	15.61	16.5
		8	0	15.51	15.50	15.59	16.5
		8	4	15.60	15.46	15.36	16.5
		8	7	15.62	15.40	15.47	16.5
		15	0	15.66	15.60	15.43	16.5
	16QAM	1	0	16.21	15.81	16.02	16.5
		1	7	14.74	15.26	13.89	16.5
		1	14	16.06	16.05	16.13	16.5
		8	0	15.56	15.50	15.32	16.5
		8	4	15.55	15.64	15.01	16.5
		8	7	15.58	15.28	15.49	16.5
		15	0	15.66	15.44	15.56	16.5
	64QAM	1	0	16.06	15.63	15.90	16.5
		1	7	14.74	15.13	13.85	16.5
		1	14	15.99	15.92	15.96	16.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18625	18900	19175		
5MHz	QPSK	8	0	15.53	15.43	15.32	16.5	
		8	4	15.54	15.50	14.98	16.5	
		8	7	15.45	15.10	15.39	16.5	
		15	0	15.62	15.44	15.41	16.5	
	16QAM	QPSK	1	0	15.62	15.61	15.58	16.5
			1	13	15.6	15.59	15.58	16.5
			1	24	15.73	15.5	15.47	16.5
			12	0	15.65	15.61	15.6	16.5
			12	6	15.54	15.66	15.64	16.5
			12	13	15.62	15.64	15.53	16.5
		16QAM	25	0	15.67	15.66	15.52	16.5
			1	0	16.14	16.08	16.02	16.5
			1	13	15.98	15.74	15.25	16.5
			1	24	15.84	15.23	15.63	16.5
			12	0	15.55	15.71	15.74	16.5
			12	6	15.65	15.46	15.43	16.5
	64QAM	16QAM	12	13	15.76	15.44	15.58	16.5
			25	0	15.51	15.58	15.44	16.5
			1	0	16.09	15.98	15.86	16.5
			1	13	15.94	15.56	15.08	16.5
			1	24	15.83	15.13	15.62	16.5
			12	0	15.45	15.61	15.67	16.5
		64QAM	12	6	15.55	15.43	15.39	16.5
			12	13	15.76	15.43	15.49	16.5
	10MHz	QPSK	25	0	15.67	15.66	15.52	16.5
			25	0	15.67	15.66	15.52	16.5
			1	0	16.09	15.98	15.86	16.5
			1	13	15.94	15.56	15.08	16.5
1			24	15.83	15.13	15.62	16.5	
12			0	15.45	15.61	15.67	16.5	
12			6	15.55	15.43	15.39	16.5	
16QAM		64QAM	12	13	15.76	15.43	15.49	16.5
			25	0	15.39	15.57	15.31	16.5
			1	0	16.15	15.85	16.03	16.5
			1	25	15.53	15.96	15.98	16.5
			1	49	16.14	16.07	15.76	16.5
			25	0	15.53	15.48	15.58	16.5
			25	13	15.54	15.53	15.57	16.5
64QAM		16QAM	25	25	15.69	15.47	15.48	16.5
			50	0	15.47	15.54	15.44	16.5
			1	0	16.07	15.72	15.96	16.5
			1	25	15.50	15.91	15.95	16.5
			1	49	16.02	16.03	15.58	16.5
			25	0	15.40	15.37	15.41	16.5
			25	0	15.40	15.37	15.41	16.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18675	18900	19125	
15MHz	QPSK	25	13	15.39	15.43	15.52	16.5
		25	25	15.65	15.32	15.30	16.5
		50	0	15.44	15.54	15.43	16.5
		1	0	15.81	15.54	15.57	16.5
		1	38	15.45	15.14	15.57	16.5
		1	74	15.52	15.51	15.57	16.5
		36	0	15.70	15.48	15.51	16.5
	36	18	15.70	15.55	15.58	16.5	
	36	39	15.65	15.45	15.44	16.5	
	75	0	15.62	15.45	15.39	16.5	
	16QAM	1	0	16.08	15.82	16.02	16.5
		1	38	15.52	15.89	15.89	16.5
		1	74	16.07	16.07	15.70	16.5
		36	0	15.45	15.47	15.56	16.5
		36	18	15.54	15.51	15.57	16.5
		36	39	15.66	15.40	15.43	16.5
		75	0	15.41	15.47	15.40	16.5
	64QAM	1	0	15.97	15.63	15.91	16.5
		1	38	15.45	15.90	15.92	16.5
		1	74	15.98	15.99	15.52	16.5
		36	0	15.36	15.37	15.38	16.5
		36	18	15.37	15.41	15.48	16.5
		36	39	15.63	15.27	15.27	16.5
		75	0	15.38	15.45	15.33	16.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18700	18900	19100	
20MHz	QPSK	1	0	15.75	15.68	15.68	16.5
		1	50	15.92	15.59	15.01	16.5
		1	99	15.80	15.67	15.70	16.5
		50	0	15.68	15.62	15.66	16.5
		50	25	15.62	15.65	15.58	16.5
		50	50	15.73	15.66	15.58	16.5
		100	0	15.69	15.64	15.56	16.5
	16QAM	1	0	16.04	16.12	15.75	16.5
		1	50	15.93	16.40	15.75	16.5
		1	99	15.74	16.15	16.20	16.5
		50	0	15.59	15.53	15.59	16.5
		50	25	15.64	15.57	15.54	16.5
		50	50	15.58	15.61	15.64	16.5
		100	0	15.61	15.58	15.59	16.5
	64QAM	1	0	15.97	15.93	15.62	16.5
		1	50	15.74	16.25	15.60	16.5
		1	99	15.74	16.07	16.10	16.5
		50	0	15.49	15.42	15.43	16.5
		50	25	15.58	15.52	15.41	16.5

		50	50	15.44	15.56	15.50	16.5
		100	0	15.46	15.43	15.43	16.5

LTE Band 2 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	14.11	13.91	14.08	15
		1	2	14.33	14.04	13.33	15
		1	5	14.21	14.21	13.97	15
		3	0	14.01	14.11	14.05	15
		3	2	13.79	14.05	13.64	15
		3	3	14.17	13.98	13.82	15
		6	0	14.19	13.94	13.68	15
	16QAM	1	0	14.21	14.66	14.57	15
		1	2	14.02	14.1	14.27	15
		1	5	14.21	14.46	14.35	15
		3	0	14.13	13.74	13.69	15
		3	2	14.17	13.75	14	15
		3	3	13.56	14.2	13.88	15
		6	0	14.18	14.15	13.77	15
	64QAM	1	0	14.13	14.56	14.43	15
		1	2	13.92	14.00	14.08	15
		1	5	14.17	14.41	14.21	15
		3	0	14.09	13.60	13.68	15
		3	2	13.99	13.73	13.94	15
		3	3	13.50	14.05	13.85	15
		6	0	14.06	14.05	13.62	15
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	14.16	14	14.01	15
		1	7	13.22	13.45	12.63	15
		1	14	14.08	14.06	14.04	15
		8	0	14.05	14.03	13.7	15
		8	4	14.13	13.93	13.97	15
		8	7	14.01	14.13	13.93	15
		15	0	14.09	14.07	14.05	15
	16QAM	1	0	14.46	14.56	14.58	15
		1	7	13.04	14.1	14.23	15
		1	14	14.3	13.99	14.21	15
		8	0	14.07	14.35	13.94	15
		8	4	13.59	13.81	14.01	15
		8	7	13.98	14.08	14.15	15
		15	0	13.97	13.93	13.9	15
	64QAM	1	0	14.32	14.52	14.44	15
1		7	12.86	13.93	14.08	15	
1		14	14.16	13.82	14.12	15	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
				18625	18900	19175			
5MHz	QPSK	8	0	14.03	14.25	13.83	15		
		8	4	13.50	13.65	13.97	15		
		8	7	13.86	13.99	14.06	15		
		15	0	13.82	13.79	13.81	15		
	16QAM	QPSK	1	0	14.29	14.03	14.15	15	
			1	13	14.17	14.08	14.09	15	
			1	24	14.15	13.92	13.95	15	
			12	0	14.15	14.16	14.09	15	
			12	6	14.16	14.06	13.98	15	
			12	13	14.11	14.1	14.12	15	
		16QAM	25	0	14.04	14.1	14.02	15	
			16QAM	1	0	14.54	14.06	14.73	15
				1	13	14.55	14.77	14.16	15
				1	24	14.11	14.59	13.99	15
				12	0	14.19	14.03	14.07	15
				12	6	13.87	13.94	13.95	15
	12	13		14.15	14.2	14.06	15		
	64QAM	25	0	14.01	14.12	13.96	15		
		64QAM	1	0	14.46	13.97	14.56	15	
			1	13	14.55	14.69	14.13	15	
			1	24	14.01	14.48	13.87	15	
			12	0	14.05	13.93	13.89	15	
			12	6	13.72	13.85	13.80	15	
			12	13	14.00	14.15	13.93	15	
	25		0	13.88	13.96	13.87	15		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
					18650	18900	19150		
	10MHz	QPSK	1	0	14.25	14.33	14.17	15	
1			25	14.14	13.73	13.38	15		
1			49	14.34	14.11	13.97	15		
25			0	14.19	14.09	14.1	15		
25			13	14.11	14.08	14.01	15		
25			25	14.09	14.02	14.08	15		
50			0	14.12	14.02	14.07	15		
16QAM		16QAM	1	0	14.56	14.07	14.55	15	
			1	25	13.56	14.44	13.82	15	
			1	49	14.55	14.84	14.23	15	
			25	0	14.11	13.95	13.99	15	
			25	13	13.99	13.96	13.93	15	
			25	25	14.12	14	13.88	15	
			50	0	13.94	13.99	13.96	15	
64QAM		64QAM	1	0	14.37	13.99	14.39	15	
			1	25	13.39	14.42	13.81	15	
			1	49	14.41	14.79	14.12	15	
			25	0	14.01	13.82	13.82	15	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
		18675	18900	19125				
15MHz	QPSK	25	13	13.91	13.83	13.88	15	
		25	25	13.93	13.84	13.80	15	
		50	0	13.75	13.92	13.92	15	
		1	0	14.16	13.85	14.25	15	
		1	38	14.13	13.84	14.22	15	
		1	74	14.10	14.01	13.91	15	
		36	0	14.30	14.04	14.05	15	
	16QAM	36	18	14.09	14.09	14.19	15	
		36	39	14.09	14.13	14.11	15	
		75	0	14.13	14.05	14.11	15	
		1	0	14.74	14.38	13.78	15	
		1	38	14.48	14.62	14.26	15	
		1	74	14.25	14.28	14.00	15	
		36	0	14.25	14.03	14.08	15	
	64QAM	36	18	14.11	13.96	14.00	15	
		36	39	14.07	13.93	14.05	15	
		75	0	14.09	13.90	13.92	15	
		1	0	14.72	14.25	13.73	15	
		1	38	14.45	14.47	14.19	15	
		1	74	14.06	14.16	13.84	15	
		36	0	14.10	13.92	14.07	15	
	20MHz	QPSK	36	18	14.07	13.77	13.96	15
			36	39	13.99	13.77	13.99	15
			75	0	14.08	13.83	13.84	15
			1	0	14.34	14.19	14.18	15
			1	50	13.2	14.31	13.07	15
			1	99	14.08	14.19	14.28	15
50			0	14.2	14.14	14.06	15	
16QAM		50	25	14.16	14.06	14.02	15	
		50	50	14.15	14.08	14.1	15	
		100	0	14.1	14.14	14.16	15	
		1	0	14.39	14.86	14.75	15	
		1	50	13.8	14.07	15.16	15	
		1	99	14.13	14.83	14.81	15	
		50	0	13.98	14.01	14.01	15	
64QAM		50	25	14.07	14.04	13.99	15	
		50	50	14.13	14.04	14.06	15	
		100	0	14.12	14.13	14.17	15	
		1	0	14.37	14.75	14.70	15	
		1	50	13.66	14.02	15.09	15	
		1	99	14.09	14.71	14.76	15	
		50	0	13.88	13.93	13.91	15	
Bandwidth		Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18700	18900	19100	
20MHz		QPSK	50	25	14.07	14.04	13.99	15
			50	50	14.13	14.04	14.06	15
20MHz		16QAM	50	25	14.07	14.04	13.99	15
			50	50	14.13	14.04	14.06	15
20MHz	64QAM	50	25	14.07	13.90	13.91	15	
		50	25	14.07	13.90	13.91	15	

		50	50	14.07	13.91	13.93	15
		100	0	14.11	14.02	14.10	15

LTE Band 2 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18607	18900	19193	
1.4MHz	QPSK	1	0	19.65	19.61	19.53	20
		1	2	19.27	19.25	19.23	20
		1	5	19.68	19.6	19.56	20
		3	0	19.5	19.5	19.46	20
		3	2	19.42	19.45	19.34	20
		3	3	19.48	19.42	19.46	20
		6	0	19.65	19.64	19.56	20
	16QAM	1	0	19.93	20.02	19.88	20
		1	2	19.67	19.75	19.57	20
		1	5	19.96	19.97	19.88	20
		3	0	19.65	19.57	19.61	20
		3	2	19.47	19.51	19.36	20
		3	3	19.67	19.64	19.57	20
		6	0	19.59	19.58	19.46	20
	64QAM	1	0	19.81	19.97	19.86	20
		1	2	19.52	19.58	19.38	20
		1	5	19.88	19.95	19.73	20
		3	0	19.60	19.44	19.43	20
		3	2	19.39	19.45	19.32	20
		3	3	19.57	19.61	19.57	20
		6	0	19.58	19.48	19.30	20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18615	18900	19185	
3MHz	QPSK	1	0	19.01	18.95	18.84	20
		1	7	18.83	18.59	18.73	20
		1	14	18.9	18.88	18.9	20
		8	0	18.91	18.84	18.81	20
		8	4	18.92	18.85	18.72	20
		8	7	18.81	18.79	18.8	20
		15	0	18.98	18.9	18.84	20
	16QAM	1	0	19.26	19.22	19.21	20
		1	7	19.29	18.92	18.81	20
		1	14	19.29	19.23	19.22	20
		8	0	18.9	18.93	18.81	20
		8	4	18.9	18.86	18.79	20
		8	7	18.89	18.78	18.72	20
		15	0	18.94	18.82	18.8	20
	64QAM	1	0	19.17	19.20	19.17	20
		1	7	19.10	18.91	18.77	20
		1	14	19.22	19.20	19.07	20

		8	0	18.81	18.76	18.65	20
		8	4	18.85	18.70	18.63	20
		8	7	18.77	18.74	18.59	20
		15	0	18.90	18.76	18.66	20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18625	18900	19175	
5MHz	QPSK	1	0	18.98	18.87	18.88	20
		1	13	18.96	18.89	18.86	20
		1	24	18.98	18.87	18.89	20
		12	0	18.99	18.96	18.92	20
		12	6	18.95	18.9	18.82	20
		12	13	19.01	18.95	18.85	20
		25	0	18.94	18.91	18.86	20
	16QAM	1	0	19.28	19.19	19.17	20
		1	13	19.27	19.25	19.12	20
		1	24	19.18	19.16	19.18	20
		12	0	18.93	18.9	18.88	20
		12	6	18.89	18.82	18.76	20
		12	13	18.93	18.87	18.82	20
		25	0	18.87	18.85	18.82	20
	64QAM	1	0	19.12	19.18	19.02	20
		1	13	19.20	19.16	18.94	20
		1	24	19.04	19.14	18.99	20
		12	0	18.89	18.86	18.76	20
		12	6	18.81	18.80	18.58	20
		12	13	18.90	18.79	18.69	20
		25	0	18.76	18.72	18.63	20
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				18650	18900	19150	
10MHz	QPSK	1	0	18.97	18.89	18.81	20
		1	25	18.86	18.62	18.79	20
		1	49	18.87	18.87	18.86	20
		25	0	18.96	18.91	18.89	20
		25	13	18.95	18.92	18.85	20
		25	25	18.96	18.85	18.87	20
		50	0	18.92	18.88	18.87	20
	16QAM	1	0	19.29	19.15	19.23	20
		1	25	19.22	18.92	18.98	20
		1	49	19.2	19.22	19.09	20
		25	0	18.92	18.85	18.79	20
		25	13	18.87	18.86	18.82	20
		25	25	18.89	18.82	18.77	20
		50	0	18.87	18.85	18.78	20
	64QAM	1	0	19.20	19.01	19.10	20
		1	25	19.08	18.79	18.92	20
		1	49	19.12	19.11	19.02	20
		25	0	18.75	18.73	18.64	20

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				18675	18900	19125		
15MHz	QPSK	25	13	18.80	18.77	18.70	20	
		25	25	18.70	18.74	18.65	20	
		50	0	18.71	18.83	18.68	20	
		1	0	18.97	18.88	18.77	20	
		1	38	18.98	18.94	18.86	20	
		1	74	18.85	18.79	18.85	20	
		36	0	19.03	18.95	18.86	20	
	16QAM	36	18	18.96	18.9	18.88	20	
		36	39	18.94	18.92	18.87	20	
		75	0	18.95	18.88	18.9	20	
		1	0	19.16	19.21	19.1	20	
		1	38	19.33	19.2	19.15	20	
		1	74	19.15	18.99	19.16	20	
		36	0	18.91	18.88	18.85	20	
	64QAM	36	18	18.88	18.85	18.85	20	
		36	39	18.94	18.88	18.86	20	
		75	0	18.87	18.83	18.83	20	
		1	0	19.07	19.09	19.01	20	
		1	38	19.26	19.19	18.99	20	
		1	74	19.12	18.89	18.97	20	
		36	0	18.73	18.78	18.85	20	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					18700	18900	19100	
	20MHz	QPSK	1	0	19.06	19.04	18.94	20
1			50	18.75	18.82	18.73	20	
1			99	18.97	18.94	18.89	20	
50			0	19.03	18.9	18.84	20	
50			25	18.94	18.87	18.84	20	
50			50	18.95	18.86	18.86	20	
100			0	18.96	18.89	18.85	20	
16QAM		1	0	19.35	19.35	19.26	20	
		1	50	18.93	19.15	18.86	20	
		1	99	19.39	19.22	19.15	20	
		50	0	18.95	18.9	18.81	20	
		50	25	18.88	18.82	18.78	20	
		50	50	18.87	18.85	18.81	20	
		100	0	18.91	18.83	18.79	20	
64QAM		1	0	19.32	19.27	19.22	20	
		1	50	18.86	18.96	18.72	20	
		1	99	19.36	19.13	19.11	20	
		50	0	18.76	18.71	18.78	20	
		50	25	18.86	18.64	18.60	20	

		50	50	18.73	18.79	18.77	20
		100	0	18.85	18.73	18.73	20

LTE Band 4 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	20.16	20.14	20.07	21
		1	2	19.74	19.72	19.53	21
		1	5	20.15	20.09	20.07	21
		3	0	20.02	20.03	19.92	21
		3	2	19.93	20.06	19.95	21
		3	3	20.09	20.08	19.95	21
		6	0	20.13	20.01	19.99	21
	16QAM	1	0	20.42	20.26	20.16	21
		1	2	20.34	20.13	20.09	21
		1	5	20.48	20.45	20.38	21
		3	0	20.05	20.08	19.98	21
		3	2	19.99	19.99	20.13	21
		3	3	20.07	20.06	19.94	21
		6	0	19.96	19.96	19.97	21
	64QAM	1	0	20.31	20.23	20.14	21
		1	2	20.27	20.06	20.06	21
		1	5	20.45	20.42	20.35	21
		3	0	20.00	20.03	19.94	21
		3	2	19.97	19.87	20.11	21
		3	3	20.04	20.02	19.85	21
		6	0	19.84	19.84	19.81	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	20.21	20.15	20.06	21
		1	7	19.58	19.71	19.94	21
		1	14	20.07	20.12	20.06	21
		8	0	20.14	20.12	20.05	21
		8	4	20.02	20.1	20.07	21
		8	7	20.15	20.04	20	21
		15	0	20.14	20.12	20.06	21
	16QAM	1	0	20.42	20.34	20.3	21
		1	7	20.5	20.29	20.41	21
		1	14	20.47	20.39	20.3	21
		8	0	20.09	20.12	20.04	21
		8	4	20.09	20.08	20.08	21
		8	7	20.07	19.99	20.01	21
		15	0	20.14	20.06	19.98	21
	64QAM	1	0	20.31	20.22	20.30	21
		1	7	20.39	20.24	20.25	21
		1	14	20.30	20.31	20.27	21

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
				19975	20175	20375			
5MHz	QPSK	8	0	20.01	20.07	19.91	21		
		8	4	19.93	20.02	19.96	21		
		8	7	19.93	19.89	19.84	21		
		15	0	20.05	19.99	19.97	21		
	16QAM	QPSK	1	0	20.22	20.15	20.09	21	
			1	13	20.15	20.12	20.08	21	
			1	24	20.16	20.08	20.07	21	
			12	0	20.2	20.13	20.07	21	
			12	6	20.14	20.11	20.06	21	
			12	13	20.18	20.15	20.06	21	
		16QAM	25	0	20.16	20.11	20.08	21	
			64QAM	1	0	20.44	20.37	20.37	21
				1	13	20.55	20.44	20.52	21
				1	24	20.32	20.39	20.23	21
				12	0	20.15	20.13	20.09	21
				12	6	20.14	20.01	20.03	21
	12	13		20.1	20.1	20.03	21		
	64QAM	25	0	20.08	20.01	20	21		
		QPSK	1	0	20.37	20.36	20.31	21	
			1	13	20.49	20.31	20.36	21	
			1	24	20.16	20.27	20.04	21	
			12	0	19.99	19.98	19.94	21	
			12	6	20.10	19.89	19.99	21	
			12	13	20.08	20.00	19.94	21	
	25		0	19.95	19.92	19.90	21		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
					20000	20175	20350		
	10MHz	QPSK	1	0	20.16	20.2	20.15	21	
1			25	19.87	19.94	19.91	21		
1			49	20.09	20.09	19.99	21		
25			0	20.17	20.14	20.08	21		
25			13	20.13	20.12	20.09	21		
25			25	20.15	20.09	20.1	21		
50			0	20.16	20.13	20.07	21		
16QAM		1	0	20.43	20.42	20.36	21		
		1	25	20.2	20.27	20.27	21		
		1	49	20.42	20.41	20.29	21		
		25	0	20.1	20.08	20.03	21		
		25	13	20.1	20.06	20.04	21		
		25	25	20.05	20.07	19.99	21		
		50	0	20.03	20.04	20.01	21		
64QAM		1	0	20.39	20.40	20.35	21		
		1	25	20.10	20.26	20.17	21		
		1	49	20.27	20.37	20.16	21		
		25	0	20.01	20.02	19.88	21		

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20025	20175	20325	
15MHz	QPSK	25	13	19.96	20.02	19.96	21
		25	25	19.93	19.88	19.97	21
		50	0	19.91	19.97	19.85	21
		1	0	20.09	20.09	20.09	21
		1	38	20.03	20.12	20.07	21
		1	74	20.08	19.99	19.94	21
		36	0	20.14	20.16	20.1	21
	16QAM	36	18	20.12	20.09	20.11	21
		36	39	20.11	20.13	20.06	21
		75	0	20.14	20.1	20.04	21
		1	0	20.51	20.44	20.38	21
		1	38	20.39	20.29	20.31	21
		1	74	20.4	20.29	20.2	21
		36	0	20.07	20.11	20.07	21
	64QAM	36	18	20.08	20.02	20.08	21
		36	39	20.03	20.02	20	21
		75	0	20.06	20.04	19.99	21
		1	0	20.37	20.44	20.29	21
		1	38	20.22	20.21	20.12	21
		1	74	20.39	20.17	20.12	21
		36	0	19.88	19.99	19.93	21
20MHz	QPSK	36	18	19.97	19.84	19.93	21
		36	39	19.97	19.88	19.91	21
		75	0	19.89	19.97	19.99	21
		1	0	20.26	20.25	20.19	21
		1	50	19.99	19.81	19.95	21
		1	99	20.16	20.09	20.09	21
		50	0	20.2	20.18	20.13	21
	16QAM	50	25	20.05	20.06	20.08	21
		50	50	20.11	20.06	20.06	21
		100	0	20.15	20.11	20.09	21
		1	0	20.45	20.54	20.52	21
		1	50	20.22	20.16	20.13	21
		1	99	20.39	20.42	20.41	21
		50	0	20.1	20.12	20.03	21
	64QAM	50	25	20.04	20.02	19.99	21
		50	50	20.02	19.98	19.96	21
		100	0	20.03	20.04	20.04	21
		1	0	20.45	20.49	20.48	21
		1	50	20.12	20.15	19.95	21
		1	99	20.23	20.35	20.38	21
		50	0	19.92	20.00	20.00	21
50	25	19.93	19.98	19.90	21		

		50	50	20.00	19.86	19.91	21
		100	0	19.95	20.00	19.87	21

LTE Band 4 Receiver on(Right head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	18.18	18.14	18.07	19
		1	2	17.81	17.82	17.78	19
		1	5	18.12	18.11	18.08	19
		3	0	18.01	18.01	17.95	19
		3	2	17.92	17.86	17.91	19
		3	3	18.07	18.08	18	19
		6	0	18.1	18.04	17.95	19
	16QAM	1	0	18.46	18.46	18.36	19
		1	2	18.07	18.04	17.93	19
		1	5	18.45	18.47	18.44	19
		3	0	18.11	18.1	17.92	19
		3	2	18.06	18.07	17.82	19
		3	3	18.08	18.04	18.06	19
		6	0	18.05	18.07	17.86	19
	64QAM	1	0	18.41	18.45	18.22	19
		1	2	17.93	18.02	17.75	19
		1	5	18.41	18.30	18.28	19
		3	0	18.08	18.10	17.84	19
		3	2	18.05	18.03	17.69	19
		3	3	17.91	17.90	17.93	19
		6	0	17.98	18.04	17.80	19
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	18.16	18.15	18.12	19
		1	7	18.02	18.16	17.93	19
		1	14	18.08	18.13	18.05	19
		8	0	18.15	18.07	18.04	19
		8	4	18.07	18	18.01	19
		8	7	18.01	18.03	18	19
		15	0	18.13	18.13	18.03	19
	16QAM	1	0	18.39	18.45	18.4	19
		1	7	18.11	18.15	18.34	19
		1	14	18.49	18.36	18.24	19
		8	0	18.11	18.03	18.09	19
		8	4	18.09	18	17.99	19
		8	7	18.08	18.03	18.03	19
		15	0	18.07	18.05	18.04	19
	64QAM	1	0	18.32	18.32	18.39	19
		1	7	17.93	18.12	18.32	19
		1	14	18.40	18.22	18.17	19

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				19975	20175	20375		
5MHz	QPSK	8	0	18.08	18.01	18.02	19	
		8	4	17.97	17.89	17.85	19	
		8	7	17.94	18.03	17.89	19	
		15	0	18.01	18.02	17.94	19	
		1	0	18.16	18.11	18.09	19	
		1	13	18.09	18.08	18.11	19	
		1	24	18.14	18.08	18.07	19	
	16QAM	12	0	18.2	18.18	18.13	19	
		12	6	18.2	18.13	18.05	19	
		12	13	18.14	18.11	18.13	19	
		25	0	18.14	18.13	18.09	19	
		1	0	18.48	18.45	18.39	19	
		1	13	18.6	18.49	18.4	19	
		1	24	18.48	18.37	18.42	19	
	64QAM	12	0	18.15	18.11	18.09	19	
		12	6	18.11	18.1	18.02	19	
		12	13	18.11	18.04	18.08	19	
		25	0	18.09	18.04	18.01	19	
		1	0	18.47	18.38	18.24	19	
		1	13	18.57	18.30	18.33	19	
		1	24	18.30	18.23	18.34	19	
	10MHz	QPSK	12	0	18.14	18.09	17.92	19
			12	6	17.98	18.03	17.99	19
			12	13	17.97	17.96	18.06	19
			25	0	18.08	17.91	17.92	19
			1	0	18.17	18.19	18.11	19
			1	25	18.02	18.05	17.95	19
			1	49	18.1	18.09	18.07	19
16QAM		25	0	18.16	18.18	18.09	19	
		25	13	18.19	18.15	18.12	19	
		25	25	18.15	18.12	18.1	19	
		50	0	18.14	18.15	18.12	19	
		1	0	18.44	18.5	18.37	19	
		1	25	18.45	18.17	18.42	19	
		1	49	18.38	18.38	18.32	19	
64QAM		25	0	18.13	18.1	18.03	19	
		25	13	18.08	18.06	18.01	19	
		25	25	18.03	18	18.03	19	
		50	0	18.06	18.1	18.05	19	
		1	0	18.27	18.33	18.25	19	
		1	25	18.43	18.05	18.32	19	
		1	49	18.29	18.22	18.23	19	
			25	0	18.05	17.96	17.96	19

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
		20025	20175	20325				
15MHz	QPSK	25	13	17.94	18.05	18.00	19	
		25	25	17.94	17.86	18.03	19	
		50	0	18.04	18.03	18.04	19	
	QPSK	1	0	18.17	18.13	18.11	19	
		1	38	18.13	18.15	18.07	19	
		1	74	18.06	17.98	17.97	19	
		36	0	18.18	18.19	18.18	19	
		36	18	18.11	18.14	18.12	19	
		36	39	18.1	18.19	18.1	19	
		75	0	18.13	18.17	18.06	19	
	16QAM	1	0	18.47	18.54	18.31	19	
		1	38	18.36	18.35	18.42	19	
		1	74	18.33	18.21	18.34	19	
		36	0	18.1	18.14	18.11	19	
		36	18	18.04	18.03	18.05	19	
		36	39	18.03	18.09	18.04	19	
		75	0	18.13	18.08	18	19	
	64QAM	1	0	18.33	18.35	18.21	19	
		1	38	18.31	18.22	18.33	19	
		1	74	18.31	18.09	18.27	19	
		36	0	18.06	17.98	18.05	19	
		36	18	17.93	17.88	17.94	19	
		36	39	17.94	17.90	17.94	19	
		75	0	18.00	17.90	17.87	19	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
			20050	20175	20300			
	20MHz	QPSK	1	0	18.25	18.23	18.23	19
1			50	17.75	18	17.94	19	
1			99	18.14	18.07	18.06	19	
50			0	18.16	18.22	18.21	19	
50			25	18.08	18.12	18.09	19	
50			50	18.17	18.07	18.05	19	
100			0	18.14	18.09	18.1	19	
16QAM		1	0	18.54	18.52	18.58	19	
		1	50	18.16	18.17	18.29	19	
		1	99	18.52	18.33	18.42	19	
		50	0	18.09	18.13	18.12	19	
		50	25	18.06	18.04	18.05	19	
		50	50	18.07	18.02	18.01	19	
		100	0	18.06	17.99	18.03	19	
64QAM		1	0	18.36	18.46	18.49	19	
		1	50	18.02	18.10	18.27	19	
		1	99	18.38	18.21	18.42	19	
		50	0	18.02	18.11	18.09	19	
		50	25	17.88	17.88	17.90	19	

		50	50	17.91	17.92	17.89	19
		100	0	17.90	17.87	17.86	19

LTE Band 4 Receiver off (Body Scene)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	22.65	22.61	22.55	23.5
		1	2	22.38	22.2	22.33	23.5
		1	5	22.65	22.61	22.54	23.5
		3	0	22.55	22.53	22.5	23.5
		3	2	22.41	22.33	22.25	23.5
		3	3	22.49	22.42	22.4	23.5
		6	0	21.6	21.64	21.51	23
	16QAM	1	0	21.94	22.05	21.86	23
		1	2	21.56	21.63	21.52	23
		1	5	21.88	21.92	21.8	23
		3	0	21.64	21.51	21.5	23
		3	2	21.5	21.63	21.58	23
		3	3	21.56	21.6	21.4	23
		6	0	20.61	20.48	20.52	22
	64QAM	1	0	20.93	20.97	20.82	22
		1	2	20.49	20.59	20.46	22
		1	5	20.80	20.92	20.77	22
		3	0	20.62	20.43	20.52	22
		3	2	20.54	20.60	20.47	22
		3	3	20.58	20.65	20.27	22
		6	0	19.65	19.38	19.43	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	22.68	22.61	22.58	23.5
		1	7	22.54	22.48	22.35	23.5
		1	14	22.58	22.61	22.56	23.5
		8	0	21.67	21.61	21.53	23
		8	4	21.56	21.52	21.53	23
		8	7	21.59	21.49	21.46	23
		15	0	21.66	21.64	21.5	23
	16QAM	1	0	21.8	21.85	21.74	23
		1	7	21.66	21.68	21.47	23
		1	14	21.79	21.86	21.77	23
		8	0	20.59	20.56	20.59	22
		8	4	20.53	20.58	20.44	22
		8	7	20.54	20.5	20.45	22
		15	0	20.6	20.57	20.45	22
	64QAM	1	0	20.76	20.77	20.72	22
		1	7	20.68	20.73	20.35	22
		1	14	20.77	20.88	20.67	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
		19975	20175	20375			
5MHz	QPSK	8	0	19.48	19.53	19.51	21
		8	4	19.56	19.48	19.32	21
		8	7	19.42	19.50	19.37	21
		15	0	19.62	19.47	19.43	21
		1	0	22.58	22.61	22.6	23.5
		1	13	22.65	22.63	22.58	23.5
		1	24	22.62	22.61	22.51	23.5
	16QAM	12	0	21.67	21.65	21.58	23
		12	6	21.6	21.6	21.58	23
		12	13	21.64	21.63	21.59	23
		25	0	21.65	21.63	21.55	23
		1	0	21.87	21.84	21.77	23
		1	13	21.82	21.81	21.79	23
		1	24	21.87	21.84	21.8	23
	64QAM	12	0	20.61	20.6	20.55	22
		12	6	20.57	20.55	20.49	22
		12	13	20.59	20.59	20.49	22
		25	0	20.55	20.53	20.46	22
		1	0	20.82	20.75	20.79	22
		1	13	20.87	20.67	20.74	22
		1	24	20.81	20.82	20.84	22
10MHz	QPSK	12	0	19.54	19.54	19.47	21
		12	6	19.53	19.59	19.52	21
		12	13	19.48	19.53	19.42	21
		25	0	19.50	19.53	19.39	21
		1	0	22.68	22.61	22.59	23.5
		1	25	22.45	22.28	22.34	23.5
		1	49	22.6	22.57	22.55	23.5
	16QAM	25	0	21.66	21.62	21.57	23
		25	13	21.6	21.6	21.58	23
		25	25	21.58	21.55	21.56	23
		50	0	21.58	21.59	21.56	23
		1	0	21.88	21.83	21.98	23
		1	25	21.46	21.99	21.76	23
		1	49	21.82	21.79	21.85	23
	64QAM	25	0	20.58	20.55	20.52	22
		25	13	20.51	20.52	20.49	22
		25	25	20.55	20.52	20.51	22
		50	0	20.54	20.52	20.48	22
		1	0	20.92	20.84	20.92	22
		1	25	20.36	21.04	20.69	22
		1	49	20.70	20.79	20.78	22
25	0	19.50	19.49	19.48	21		

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
		20025	20175	20325			
15MHz	QPSK	25	13	19.54	19.51	19.50	21
		25	25	19.44	19.48	19.48	21
		50	0	19.45	19.54	19.46	21
		1	0	22.67	22.62	22.6	23.5
		1	38	22.59	22.62	22.58	23.5
		1	74	22.56	22.53	22.5	23.5
		36	0	21.64	21.67	21.65	23
	36	18	21.63	21.62	21.62	23	
	36	39	21.59	21.61	21.58	23	
	75	0	21.62	21.61	21.62	23	
	16QAM	1	0	21.84	21.91	21.86	23
		1	38	21.92	22.03	21.86	23
		1	74	21.89	21.66	21.84	23
		36	0	20.61	20.6	20.56	22
		36	18	20.58	20.57	20.59	22
		36	39	20.52	20.61	20.5	22
		75	0	20.54	20.58	20.53	22
	64QAM	1	0	20.81	20.90	20.74	22
		1	38	20.90	20.90	20.89	22
		1	74	20.87	20.67	20.72	22
		36	0	19.64	19.52	19.45	21
		36	18	19.63	19.59	19.54	21
		36	39	19.38	19.57	19.45	21
		75	0	19.42	19.45	19.46	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
20MHz	QPSK	1	0	22.77	22.75	22.71	23.5
		1	50	22.32	22.36	22.34	23.5
		1	99	22.62	22.58	22.58	23.5
		50	0	21.64	21.68	21.69	23
		50	25	21.58	21.59	21.57	23
		50	50	21.61	21.6	21.58	23
		100	0	21.63	21.64	21.6	23
	16QAM	1	0	21.88	22.06	22.04	23
		1	50	21.92	21.89	21.87	23
		1	99	21.87	21.91	21.75	23
		50	0	20.58	20.59	20.57	22
		50	25	20.53	20.55	20.52	22
		50	50	20.55	20.57	20.49	22
		100	0	20.55	20.52	20.56	22
	64QAM	1	0	20.78	21.04	21.05	22
		1	50	20.87	20.76	20.86	22
		1	99	20.82	20.90	20.62	22
		50	0	19.54	19.59	19.51	21
		50	25	19.41	19.46	19.48	21

		50	50	19.57	19.57	19.42	21
		100	0	19.56	19.41	19.44	21

LTE Band 4 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	16.86	16.76	16.78	18
		1	2	17.1	17.07	16.79	18
		1	5	16.92	16.9	16.76	18
		3	0	16.87	16.85	16.77	18
		3	2	16.48	16.79	16.7	18
		3	3	16.69	16.86	16.66	18
		6	0	16.86	16.16	16.52	18
	16QAM	1	0	17.1	17.23	16.65	18
		1	2	16.85	16.64	17	18
		1	5	16.83	17	17.11	18
		3	0	16.49	16.6	16.58	18
		3	2	16.83	16.99	16.67	18
		3	3	16.87	16.83	16.45	18
		6	0	16.7	16.92	17.06	18
	64QAM	1	0	16.95	17.12	16.46	18
		1	2	16.76	16.61	16.99	18
		1	5	16.64	16.88	17.08	18
		3	0	16.46	16.55	16.45	18
		3	2	16.70	16.80	16.66	18
		3	3	16.85	16.75	16.40	18
		6	0	16.60	16.76	17.05	18
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	17.01	16.82	16.7	18
		1	7	16.61	16.54	16.08	18
		1	14	16.82	16.74	16.75	18
		8	0	16.75	16.33	16.7	18
		8	4	16.81	16.89	16.55	18
		8	7	16.73	16.49	16.52	18
		15	0	16.74	16.84	16.6	18
	16QAM	1	0	16.95	17.19	17.07	18
		1	7	16.83	16.52	16.02	18
		1	14	16.61	16.9	16.5	18
		8	0	16.84	16.68	16.82	18
		8	4	16.73	16.49	16.55	18
		8	7	17	16.76	16.29	18
		15	0	16.52	16.82	16.67	18
	64QAM	1	0	16.91	17.19	17.04	18
		1	7	16.74	16.51	15.99	18
		1	14	16.51	16.79	16.34	18

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				19975	20175	20375		
5MHz	QPSK	8	0	16.67	16.58	16.63	18	
		8	4	16.65	16.33	16.52	18	
		8	7	16.82	16.72	16.28	18	
		15	0	16.46	16.75	16.51	18	
		1	0	16.87	17.02	16.84	18	
		1	13	16.79	16.77	16.77	18	
		1	24	16.87	16.74	16.52	18	
	16QAM	12	0	16.86	16.88	16.67	18	
		12	6	16.92	16.9	16.68	18	
		12	13	16.87	16.79	16.75	18	
		25	0	16.89	16.61	16.61	18	
		1	0	16.67	17.31	16.88	18	
		1	13	17.21	17.12	16.76	18	
		1	24	17.17	16.85	17.24	18	
	64QAM	12	0	16.81	16.81	16.68	18	
		12	6	16.78	16.63	16.76	18	
		12	13	16.83	16.79	16.62	18	
		25	0	16.6	16.9	16.7	18	
		1	0	16.56	17.27	16.69	18	
		1	13	17.16	17.10	16.63	18	
		1	24	17.15	16.72	17.17	18	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20000	20175	20350	
	10MHz	QPSK	1	0	16.98	16.94	16.81	18
			1	25	16.77	16.73	16.59	18
			1	49	16.82	16.75	16.69	18
			25	0	16.85	16.81	16.72	18
			25	13	16.77	16.81	16.55	18
25			25	16.75	16.87	16.67	18	
50			0	16.81	16.78	16.75	18	
16QAM		1	0	16.75	17.08	17.14	18	
		1	25	16.74	16.72	16.04	18	
		1	49	17.23	17.23	17.1	18	
		25	0	16.79	16.79	16.69	18	
		25	13	16.76	16.75	16.6	18	
		25	25	16.66	16.63	16.67	18	
		50	0	16.79	16.71	16.59	18	
64QAM		1	0	16.66	16.90	17.12	18	
		1	25	16.72	16.69	15.95	18	
		1	49	17.13	17.05	17.06	18	
		25	0	16.77	16.64	16.63	18	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20025	20175	20325	
15MHz	QPSK	25	13	16.72	16.68	16.58	18
		25	25	16.48	16.45	16.56	18
		50	0	16.73	16.55	16.42	18
		1	0	16.90	16.89	16.76	18
		1	38	16.69	16.67	16.50	18
		1	74	16.80	16.65	16.67	18
		36	0	16.79	16.71	16.69	18
	36	18	16.68	16.73	16.46	18	
	36	39	16.70	16.80	16.59	18	
	75	0	16.80	16.76	16.74	18	
	16QAM	1	0	16.74	17.02	17.07	18
		1	38	16.70	16.70	16.00	18
		1	74	17.17	17.15	17.06	18
		36	0	16.71	16.75	16.66	18
		36	18	16.76	16.66	16.58	18
		36	39	16.59	16.56	16.66	18
		75	0	16.72	16.68	16.50	18
	64QAM	1	0	16.62	16.82	17.11	18
		1	38	16.66	16.61	15.88	18
		1	74	17.13	16.97	17.01	18
		36	0	16.70	16.64	16.57	18
		36	18	16.66	16.64	16.52	18
		36	39	16.46	16.41	16.53	18
		75	0	16.67	16.55	16.38	18
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
20MHz	QPSK	1	0	17.2	16.94	16.92	18
		1	50	16.02	15.98	16.42	18
		1	99	16.95	16.76	16.97	18
		50	0	16.85	16.87	16.89	18
		50	25	16.8	16.83	16.79	18
		50	50	16.81	16.75	16.62	18
		100	0	16.86	16.86	16.74	18
	16QAM	1	0	16.98	17.68	17	18
		1	50	16.82	16.56	16.9	18
		1	99	17.23	17.14	17.38	18
		50	0	16.76	16.82	16.71	18
		50	25	16.75	16.67	16.64	18
		50	50	16.75	16.71	16.71	18
		100	0	16.71	16.67	16.7	18
	64QAM	1	0	16.86	17.53	16.98	18
		1	50	16.64	16.46	16.80	18
		1	99	17.20	17.07	17.33	18
		50	0	16.66	16.67	16.67	18
		50	25	16.58	16.66	16.60	18

		50	50	16.59	16.54	16.59	18
		100	0	16.53	16.48	16.61	18

LTE Band 4 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	15	14.55	14.79	16
		1	2	15.17	14.07	14.33	16
		1	5	14.72	14.98	14.69	16
		3	0	14.79	14.68	14.64	16
		3	2	14.92	14.82	14.53	16
		3	3	14.77	14.34	14.63	16
		6	0	14.85	15.02	14.61	16
	16QAM	1	0	15.14	15.27	14.73	16
		1	2	14.76	13.83	14.73	16
		1	5	15.26	15.25	14.78	16
		3	0	14.8	14.84	14.86	16
		3	2	14.82	14.66	14.48	16
		3	3	14.87	14.72	14.38	16
		6	0	14.67	14.55	14.69	16
	64QAM	1	0	15.04	15.19	14.64	16
		1	2	14.65	13.76	14.66	16
		1	5	15.19	15.11	14.65	16
		3	0	14.79	14.81	14.71	16
		3	2	14.74	14.62	14.29	16
		3	3	14.84	14.66	14.22	16
		6	0	14.65	14.40	14.58	16
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	14.9	14.91	14.7	16
		1	7	14.95	13.26	14.07	16
		1	14	14.79	14.91	14.64	16
		8	0	14.82	14.68	14.82	16
		8	4	14.67	14.81	14.6	16
		8	7	14.69	14.66	14.74	16
		15	0	14.82	14.77	14.57	16
	16QAM	1	0	15.41	14.75	14.52	16
		1	7	14.65	15.53	15.11	16
		1	14	15.08	14.92	14.64	16
		8	0	14.82	14.84	14.52	16
		8	4	14.78	14.83	14.69	16
		8	7	14.85	14.89	14.66	16
		15	0	14.9	14.51	14.77	16
	64QAM	1	0	15.28	14.70	14.49	16
		1	7	14.56	15.41	15.09	16
		1	14	14.97	14.75	14.47	16

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				19975	20175	20375		
5MHz	QPSK	8	0	14.78	14.73	14.40	16	
		8	4	14.75	14.69	14.69	16	
		8	7	14.82	14.86	14.58	16	
		15	0	14.85	14.50	14.62	16	
		1	0	14.98	14.68	14.65	16	
		1	13	14.83	14.76	14.61	16	
		1	24	14.78	14.92	14.62	16	
	16QAM	12	0	14.94	14.69	14.64	16	
		12	6	14.83	14.86	14.79	16	
		12	13	14.83	14.74	14.7	16	
		25	0	14.69	14.78	14.61	16	
		1	0	15.19	14.87	15.17	16	
		1	13	15.03	15.54	14.73	16	
		1	24	15.36	15.36	14.51	16	
	64QAM	12	0	14.79	14.72	14.61	16	
		12	6	14.68	14.67	14.73	16	
		12	13	14.75	14.72	14.63	16	
		25	0	14.75	14.63	14.67	16	
		1	0	15.01	14.84	15.09	16	
		1	13	14.91	15.53	14.59	16	
		1	24	15.26	15.30	14.38	16	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20000	20175	20350	
	10MHz	QPSK	1	0	15.04	14.94	14.72	16
			1	25	14.63	14.69	13.97	16
			1	49	14.71	14.58	14.71	16
			25	0	14.91	14.84	14.65	16
			25	13	14.85	14.78	14.61	16
25			25	14.84	14.74	14.70	16	
50			0	14.87	14.64	14.73	16	
16QAM		1	0	15.01	14.78	15.22	16	
		1	25	14.65	16.00	15.35	16	
		1	49	15.03	15.11	14.85	16	
		25	0	14.80	14.67	14.58	16	
		25	13	14.79	14.70	14.59	16	
		25	25	14.84	14.67	14.62	16	
		50	0	14.60	14.65	14.65	16	
64QAM		1	0	14.85	14.69	15.04	16	
		1	25	14.51	15.90	15.26	16	
		1	49	14.88	14.95	14.78	16	
		25	0	14.65	14.57	14.53	16	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20025	20175	20325		
15MHz	QPSK	25	13	14.62	14.69	14.49	16	
		25	25	14.82	14.59	14.53	16	
		50	0	14.53	14.52	14.62	16	
		1	0	14.86	14.78	14.53	16	
		1	38	14.80	14.79	14.71	16	
		1	74	14.82	14.51	14.61	16	
		36	0	14.86	14.75	14.76	16	
	16QAM	36	18	14.74	14.65	14.64	16	
		36	39	14.80	14.74	14.74	16	
		75	0	14.69	14.78	14.71	16	
		1	0	14.93	14.66	14.80	16	
		1	38	15.04	15.45	14.56	16	
		1	74	15.36	14.85	14.41	16	
		36	0	14.87	14.76	14.74	16	
	64QAM	36	18	14.75	14.76	14.59	16	
		36	39	14.82	14.78	14.64	16	
		75	0	14.69	14.64	14.66	16	
		1	0	14.84	14.51	14.75	16	
		1	38	14.88	15.33	14.39	16	
		1	74	15.21	14.85	14.29	16	
		36	0	14.85	14.67	14.66	16	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20050	20175	20300	
	20MHz	QPSK	1	0	15.04	14.87	14.96	16
1			50	13.94	15.51	14.36	16	
1			99	14.76	14.76	14.90	16	
50			0	14.82	14.92	14.79	16	
50			25	14.76	14.82	14.60	16	
50			50	14.74	14.77	14.79	16	
100			0	14.85	14.74	14.65	16	
16QAM		1	0	15.45	15.57	15.29	16	
		1	50	15.13	15.38	14.52	16	
		1	99	14.86	14.68	14.70	16	
		50	0	14.89	14.80	14.81	16	
		50	25	14.78	14.65	14.68	16	
		50	50	14.74	14.76	14.61	16	
		100	0	14.82	14.69	14.62	16	
64QAM		1	0	15.37	15.56	15.16	16	
		1	50	15.11	15.37	14.44	16	
		1	99	14.81	14.56	14.61	16	
		50	0	14.87	14.64	14.73	16	
		50	25	14.78	14.56	14.52	16	

		50	50	14.69	14.59	14.43	16
		100	0	14.75	14.63	14.56	16

LTE Band 4 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19957	20175	20393	
1.4MHz	QPSK	1	0	19.01	18.92	18.88	20.5
		1	2	18.63	18.38	18.35	20.5
		1	5	19.01	18.91	18.9	20.5
		3	0	18.83	18.83	18.74	20.5
		3	2	18.75	18.79	18.56	20.5
		3	3	18.89	18.85	18.77	20.5
		6	0	18.89	18.92	18.83	20.5
	16QAM	1	0	19.29	19.22	19.21	20.5
		1	2	18.96	18.73	18.95	20.5
		1	5	19.29	19.2	19.12	20.5
		3	0	18.91	18.86	18.82	20.5
		3	2	18.88	18.89	18.86	20.5
		3	3	18.91	18.89	18.87	20.5
		6	0	18.9	18.78	18.79	20.5
	64QAM	1	0	19.22	19.15	19.20	20.5
		1	2	18.89	18.58	18.92	20.5
		1	5	19.23	19.14	18.95	20.5
		3	0	18.77	18.77	18.71	20.5
		3	2	18.82	18.84	18.71	20.5
		3	3	18.81	18.75	18.79	20.5
		6	0	18.84	18.75	18.66	20.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19965	20175	20385	
3MHz	QPSK	1	0	19.68	19.61	19.58	20.5
		1	7	19.35	19.59	19.8	20.5
		1	14	19.63	19.6	19.51	20.5
		8	0	19.63	19.62	19.49	20.5
		8	4	19.59	19.62	19.44	20.5
		8	7	19.57	19.52	19.48	20.5
		15	0	19.63	19.59	19.53	20.5
	16QAM	1	0	19.88	20.02	19.9	20.5
		1	7	19.95	19.61	19.55	20.5
		1	14	20	19.92	19.85	20.5
		8	0	19.54	19.62	19.54	20.5
		8	4	19.61	19.58	19.47	20.5
		8	7	19.62	19.6	19.48	20.5
		15	0	19.55	19.55	19.52	20.5
	64QAM	1	0	19.80	20.00	19.79	20.5
		1	7	19.77	19.56	19.50	20.5
		1	14	19.85	19.88	19.69	20.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				19975	20175	20375	
5MHz	QPSK	8	0	19.40	19.56	19.44	20.5
		8	4	19.43	19.51	19.37	20.5
		8	7	19.44	19.47	19.31	20.5
		15	0	19.55	19.46	19.50	20.5
		1	0	19.65	19.61	19.56	20.5
		1	13	19.6	19.59	19.55	20.5
		1	24	19.61	19.55	19.54	20.5
	16QAM	12	0	19.69	19.68	19.59	20.5
		12	6	19.6	19.55	19.59	20.5
		12	13	19.68	19.61	19.6	20.5
		25	0	19.6	19.65	19.57	20.5
		1	0	19.84	19.9	19.83	20.5
1		13	19.87	19.82	19.85	20.5	
1		24	19.88	19.9	19.81	20.5	
64QAM	12	0	19.66	19.61	19.58	20.5	
	12	6	19.55	19.55	19.48	20.5	
	12	13	19.64	19.58	19.52	20.5	
	25	0	19.6	19.59	19.48	20.5	
	1	0	19.76	19.89	19.72	20.5	
	1	13	19.77	19.73	19.81	20.5	
	1	24	19.73	19.73	19.79	20.5	
10MHz	QPSK	12	0	19.61	19.52	19.42	20.5
		12	6	19.46	19.49	19.31	20.5
		12	13	19.61	19.43	19.45	20.5
		25	0	19.55	19.47	19.32	20.5
		1	0	19.64	19.67	19.6	20.5
		1	25	19.34	19.36	19.19	20.5
		1	49	19.57	19.58	19.49	20.5
	16QAM	25	0	19.66	19.64	19.56	20.5
		25	13	19.61	19.61	19.56	20.5
		25	25	19.61	19.61	19.53	20.5
		50	0	19.62	19.6	19.6	20.5
		1	0	19.96	19.92	20	20.5
1		25	19.64	19.93	19.67	20.5	
1		49	19.99	19.94	19.78	20.5	
64QAM	25	0	19.62	19.58	19.52	20.5	
	25	13	19.57	19.5	19.51	20.5	
	25	25	19.58	19.52	19.46	20.5	
	50	0	19.57	19.54	19.52	20.5	
	1	0	19.79	19.90	19.99	20.5	
	1	25	19.52	19.86	19.52	20.5	
	1	49	19.92	19.93	19.74	20.5	
10MHz	QPSK	25	0	19.49	19.54	19.39	20.5
		1	0	19.64	19.67	19.6	20.5
		1	25	19.34	19.36	19.19	20.5
		1	49	19.57	19.58	19.49	20.5
		25	0	19.66	19.64	19.56	20.5
		25	13	19.61	19.61	19.56	20.5
		25	25	19.61	19.61	19.53	20.5
	16QAM	50	0	19.62	19.6	19.6	20.5
		1	0	19.96	19.92	20	20.5
		1	25	19.64	19.93	19.67	20.5
		1	49	19.99	19.94	19.78	20.5
		25	0	19.62	19.58	19.52	20.5
25		13	19.57	19.5	19.51	20.5	
25		25	19.58	19.52	19.46	20.5	
64QAM	50	0	19.57	19.54	19.52	20.5	
	1	0	19.79	19.90	19.99	20.5	
	1	25	19.52	19.86	19.52	20.5	
	1	49	19.92	19.93	19.74	20.5	
	25	0	19.49	19.54	19.39	20.5	
	1	0	19.64	19.67	19.6	20.5	
	1	25	19.34	19.36	19.19	20.5	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20025	20175	20325		
15MHz	QPSK	25	13	19.53	19.48	19.34	20.5	
		25	25	19.55	19.36	19.38	20.5	
		50	0	19.48	19.47	19.50	20.5	
		1	0	19.63	19.62	19.57	20.5	
		1	38	19.58	19.57	19.59	20.5	
		1	74	19.57	19.51	19.45	20.5	
		36	0	19.71	19.69	19.68	20.5	
	16QAM	36	18	19.6	19.62	19.63	20.5	
		36	39	19.64	19.64	19.6	20.5	
		75	0	19.58	19.59	19.6	20.5	
		1	0	19.87	19.97	19.96	20.5	
		1	38	19.98	19.9	19.93	20.5	
		1	74	19.88	19.89	19.75	20.5	
		36	0	19.62	19.63	19.61	20.5	
	64QAM	36	18	19.57	19.57	19.61	20.5	
		36	39	19.6	19.58	19.51	20.5	
		75	0	19.54	19.53	19.53	20.5	
		1	0	19.82	19.78	19.89	20.5	
		1	38	19.92	19.78	19.78	20.5	
		1	74	19.72	19.80	19.61	20.5	
		36	0	19.44	19.52	19.43	20.5	
	20MHz	QPSK	36	18	19.46	19.48	19.60	20.5
			36	39	19.42	19.56	19.46	20.5
			75	0	19.54	19.37	19.47	20.5
1			0	19.74	19.79	19.73	20.5	
1			50	19.47	19.5	19.34	20.5	
1			99	19.65	19.58	19.55	20.5	
50			0	19.62	19.66	19.62	20.5	
16QAM		50	25	19.56	19.58	19.59	20.5	
		50	50	19.62	19.59	19.53	20.5	
		100	0	19.59	19.58	19.61	20.5	
		1	0	20.09	20.04	20.02	20.5	
		1	50	19.93	19.77	19.72	20.5	
		1	99	19.93	19.95	19.88	20.5	
		50	0	19.57	19.6	19.56	20.5	
64QAM		50	25	19.48	19.49	19.51	20.5	
		50	50	19.53	19.54	19.49	20.5	
		100	0	19.54	19.52	19.52	20.5	
		1	0	20.08	19.89	20.01	20.5	
		1	50	19.81	19.64	19.63	20.5	
		1	99	19.82	19.85	19.71	20.5	
		50	0	19.54	19.43	19.51	20.5	
50		25	19.44	19.39	19.41	20.5		

		50	50	19.52	19.49	19.36	20.5
		100	0	19.50	19.48	19.47	20.5

LTE Band 5 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20407	20525	20643	
1.4MHz	QPSK	1	0	21.04	20.93	20.88	22
		1	2	21.35	20.35	20.51	22
		1	5	20.93	20.88	20.81	22
		3	0	20.91	21	20.81	22
		3	2	21.36	21.22	21.09	22
		3	3	20.76	20.76	20.86	22
		6	0	21.26	20.92	20.83	22
	16QAM	1	0	21.11	21.25	21.33	22
		1	2	21.01	20.8	20.95	22
		1	5	21.26	21.11	21.15	22
		3	0	20.71	21.13	20.62	22
		3	2	20.82	20.31	21.03	22
		3	3	20.72	20.63	21	22
		6	0	21.02	20.67	20.88	22
	64QAM	1	0	21.03	21.15	21.23	22
		1	2	20.95	20.72	20.89	22
		1	5	21.18	21.06	21.08	22
		3	0	20.62	21.08	20.54	22
		3	2	20.72	20.21	20.94	22
		3	3	20.64	20.56	20.92	22
		6	0	20.96	20.58	20.80	22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	21.05	20.85	20.93	22
		1	7	20.65	20.07	20.06	22
		1	14	20.89	20.82	20.94	22
		8	0	20.95	20.82	21.08	22
		8	4	20.86	21	20.96	22
		8	7	20.91	20.69	21	22
		15	0	21.03	20.96	20.75	22
	16QAM	1	0	21.34	21.12	21.14	22
		1	7	20.38	20.98	20.96	22
		1	14	21.1	21.09	21.05	22
		8	0	20.77	20.83	21.05	22
		8	4	21.03	20.93	20.83	22
		8	7	20.8	20.72	20.9	22
		15	0	20.91	20.91	20.83	22
	64QAM	1	0	21.25	21.07	21.04	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20425	20525	20625	
5MHz	QPSK	1	7	20.29	20.92	20.89	22
		1	14	21.02	21.00	20.99	22
		8	0	20.68	20.76	20.98	22
		8	4	20.96	20.88	20.75	22
		8	7	20.72	20.65	20.83	22
		15	0	20.84	20.85	20.77	22
	16QAM	1	0	20.92	20.91	21.02	22
		1	13	21.09	20.92	21	22
		1	24	20.96	20.89	20.81	22
		12	0	20.95	20.96	20.96	22
		12	6	20.84	20.99	20.97	22
		12	13	21.06	20.97	20.89	22
	64QAM	25	0	20.99	20.92	20.85	22
		1	0	21.22	21.13	20.98	22
		1	13	21.23	21.13	21.38	22
		1	24	21.33	21.36	20.94	22
		12	0	20.94	20.9	21.02	22
		12	6	20.9	20.84	20.77	22
64QAM	12	13	21.02	20.94	20.92	22	
	25	0	20.9	20.93	20.93	22	
	1	0	21.16	21.07	20.92	22	
	1	13	21.16	21.07	21.31	22	
	1	24	21.24	21.27	20.88	22	
	12	0	20.85	20.83	20.96	22	
10MHz	QPSK	12	6	20.84	20.78	20.70	22
		12	13	20.93	20.85	20.86	22
		25	0	20.80	20.86	20.84	22
		1	0	21.08	21.04	21.02	22
		1	25	20.41	21.07	20.17	22
		1	49	20.87	20.8	21.01	22
	16QAM	25	0	21.07	21.05	21.01	22
		25	13	20.97	21	20.92	22
		25	25	20.95	20.98	20.99	22
		50	0	21.01	20.9	20.92	22
		1	0	21.49	20.85	21.6	22
		1	25	20.18	21.55	20.92	22
	64QAM	1	49	20.8	21.31	21.43	22
		25	0	20.9	20.88	20.96	22
		25	13	20.91	20.97	20.86	22
		25	25	20.95	20.76	20.8	22
		50	0	20.94	20.99	20.94	22
		1	0	21.43	20.78	21.50	22
10MHz	64QAM	1	25	20.12	21.48	20.86	22

		1	49	20.72	21.25	21.37	22
		25	0	20.84	20.80	20.87	22
		25	13	20.83	20.89	20.78	22
		25	25	20.86	20.70	20.74	22
		50	0	20.89	20.90	20.85	22
LTE Band 5 Receiver on(Right head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20407	20525	20643	
1.4MHz	QPSK	1	0	20.55	20.54	20.44	21.5
		1	2	20.89	20.06	20.75	21.5
		1	5	20.49	20.43	20.43	21.5
		3	0	20.29	20.39	20.04	21.5
		3	2	20.26	20.26	19.92	21.5
		3	3	20.32	20.25	20.35	21.5
		6	0	20.4	20.52	20.21	21.5
	16QAM	1	0	21.07	20.38	20.82	21.5
		1	2	20.9	20	20.67	21.5
		1	5	20.54	20.73	21.12	21.5
		3	0	20.31	20.19	20.6	21.5
		3	2	20.33	20.49	20.13	21.5
		3	3	20.48	20.08	20.18	21.5
		6	0	20.35	20.48	20.27	21.5
	64QAM	1	0	20.99	20.32	20.75	21.5
		1	2	20.80	19.91	20.60	21.5
		1	5	20.45	20.68	21.03	21.5
		3	0	20.22	20.11	20.52	21.5
		3	2	20.26	20.41	20.05	21.5
		3	3	20.41	20.02	20.10	21.5
		6	0	20.25	20.42	20.18	21.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20415	20525	20635	
3MHz	QPSK	1	0	20.46	20.44	20.32	21.5
		1	7	20.19	20.06	20.09	21.5
		1	14	20.41	20.32	20.29	21.5
		8	0	20.39	20.38	20.19	21.5
		8	4	20.4	20.39	20.27	21.5
		8	7	20.52	20.46	20.23	21.5
		15	0	20.5	20.34	20.41	21.5
	16QAM	1	0	20.58	20.77	20.53	21.5
		1	7	19.99	21.02	21	21.5
		1	14	21.06	20.36	20.68	21.5
		8	0	20.49	20.34	20.31	21.5
		8	4	20.39	20.71	20.29	21.5
		8	7	20.66	20.36	20.51	21.5
		15	0	20.31	20.45	20.28	21.5
	64QAM	1	0	20.52	20.69	20.46	21.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20425	20525	20625	
5MHz	QPSK	1	7	19.93	20.96	20.91	21.5
		1	14	20.98	20.27	20.61	21.5
		8	0	20.41	20.26	20.26	21.5
		8	4	20.34	20.61	20.23	21.5
		8	7	20.56	20.29	20.43	21.5
		15	0	20.23	20.37	20.20	21.5
		16QAM	1	0	20.47	20.51	20.24
	1		13	20.51	20.37	20.51	21.5
	1		24	20.47	20.32	20.4	21.5
	12		0	20.51	20.43	20.49	21.5
	12		6	20.46	20.23	20.36	21.5
	12		13	20.51	20.44	20.39	21.5
	25		0	20.56	20.53	20.36	21.5
	64QAM	1	0	20.94	20.97	20.71	21.5
		1	13	20.98	20.71	20.66	21.5
		1	24	20.54	20.43	20.67	21.5
		12	0	20.54	20.56	20.42	21.5
		12	6	20.34	20.5	20.4	21.5
		12	13	20.39	20.26	20.45	21.5
		25	0	20.55	20.31	20.47	21.5
	10MHz	QPSK	1	0	20.87	20.89	20.62
1			13	20.89	20.64	20.58	21.5
1			24	20.46	20.35	20.58	21.5
12			0	20.49	20.49	20.32	21.5
12			6	20.25	20.41	20.33	21.5
12			13	20.33	20.20	20.35	21.5
25			0	20.48	20.26	20.38	21.5
16QAM		1	0	20.59	20.68	20.39	21.5
		1	25	20.07	20.09	20.06	21.5
		1	49	20.5	20.31	20.37	21.5
		25	0	20.42	20.46	20.5	21.5
		25	13	20.53	20.5	20.49	21.5
		25	25	20.5	20.36	20.46	21.5
		50	0	20.43	20.42	20.39	21.5
64QAM		1	0	20.48	20.85	20.35	21.5
		1	25	20.68	19.85	20.22	21.5
		1	49	20.93	20.78	20.64	21.5
		25	0	20.39	20.32	20.38	21.5
		25	13	20.4	20.46	20.42	21.5
		25	25	20.4	20.34	20.37	21.5
		50	0	20.27	20.39	20.36	21.5
64QAM	1	0	20.42	20.79	20.30	21.5	
	1	25	20.61	19.78	20.15	21.5	

		1	49	20.84	20.70	20.57	21.5	
		25	0	20.32	20.26	20.28	21.5	
		25	13	20.33	20.39	20.35	21.5	
		25	25	20.34	20.24	20.29	21.5	
		50	0	20.17	20.32	20.29	21.5	
LTE Band 5 Receiver off (Body Scene)				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20407	20525	20643		
1.4MHz	QPSK	1	0	22.86	22.87	22.97	24	
		1	2	22.71	22.98	22.3	24	
		1	5	22.97	22.84	22.81	24	
		3	0	22.82	22.83	22.8	24	
		3	2	22.95	22.54	22.86	24	
		3	3	22.93	22.87	22.99	24	
	16QAM	6	0	22.05	22.12	21.59	23	
		1	0	22.38	22.4	22.38	23	
		1	2	21.88	22.14	22.18	23	
		1	5	22.4	22.28	22.23	23	
		3	0	22.04	22	21.85	23	
		3	2	22.34	21.9	21.69	23	
	64QAM	3	3	21.95	22.18	21.85	23	
		6	0	20.97	20.75	20.67	22	
		1	0	22.32	22.33	22.28	22	
		1	2	21.78	22.06	22.09	22	
		1	5	22.32	22.18	22.14	22	
		3	0	21.95	21.94	21.79	22	
	3MHz	QPSK	3	2	22.26	21.80	21.64	22
			3	3	21.88	22.10	21.76	22
			6	0	20.89	20.69	20.58	21
1			0	23.04	22.82	22.81	24	
1			7	22.74	22.98	22.57	24	
1			14	23.11	22.92	22.85	24	
8			0	22.01	21.7	21.81	23	
16QAM		8	4	22.04	21.93	21.7	23	
		8	7	21.82	22.07	21.84	23	
		15	0	21.9	21.99	21.96	23	
		1	0	22.39	22.09	22.33	23	
		1	7	21.17	21.97	21.15	23	
		1	14	21.72	22.34	22.43	23	
		8	0	20.76	20.91	20.86	22	
		8	4	20.9	20.91	20.92	22	
64QAM	8	7	20.76	20.73	20.86	22		
	15	0	20.89	20.95	20.76	22		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20415	20525	20635		
				23.04	22.82	22.81	24	
				22.74	22.98	22.57	24	
				23.11	22.92	22.85	24	
				22.01	21.7	21.81	23	
				22.04	21.93	21.7	23	
				21.82	22.07	21.84	23	
				21.9	21.99	21.96	23	
				22.39	22.09	22.33	23	
				21.17	21.97	21.15	23	
				21.72	22.34	22.43	23	
				20.76	20.91	20.86	22	
				20.9	20.91	20.92	22	
				20.76	20.73	20.86	22	
				20.89	20.95	20.76	22	
				22.32	22.04	22.24	22	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20425	20525	20625		
		1	7	21.12	21.92	21.09	22	
		1	14	21.64	22.28	22.33	22	
		8	0	20.70	20.85	20.79	21	
		8	4	20.81	20.82	20.84	21	
		8	7	20.68	20.64	20.77	21	
		15	0	20.83	20.86	20.69	21	
5MHz	QPSK	1	0	22.9	22.98	22.89	24	
		1	13	22.95	23.03	22.93	24	
		1	24	22.97	22.84	22.78	24	
		12	0	22.04	22.04	21.96	23	
		12	6	21.99	22.06	22	23	
		12	13	22	22.03	21.9	23	
		25	0	21.92	21.92	21.98	23	
	16QAM	1	0	22.24	22.07	22.11	23	
		1	13	22.47	22.17	22.28	23	
		1	24	22.25	22.26	22.34	23	
		12	0	20.94	20.96	20.84	22	
		12	6	21.15	20.94	20.85	22	
		12	13	21.15	20.84	21.13	22	
		25	0	20.93	20.92	20.89	22	
	64QAM	1	0	22.18	22.02	22.01	22	
		1	13	22.42	22.09	22.19	22	
		1	24	22.20	22.17	22.25	22	
		12	0	20.89	20.88	20.75	21	
		12	6	21.08	20.85	20.79	21	
		12	13	21.07	20.77	21.07	21	
		25	0	20.87	20.86	20.83	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20450	20525	20600	
	10MHz	QPSK	1	0	23.14	23.11	22.89	24
1			25	22.48	23.08	22.82	24	
1			49	22.97	22.72	22.85	24	
25			0	21.97	21.97	22	23	
25			13	22.11	21.91	21.91	23	
25			25	22.16	22	21.99	23	
50			0	21.9	21.93	22.02	23	
16QAM		1	0	22.17	22.14	22.15	23	
		1	25	22.18	21.14	21.02	23	
		1	49	22.35	22.17	21.96	23	
		25	0	20.89	20.76	20.88	22	
		25	13	20.79	20.96	20.93	22	
		25	25	20.84	20.84	20.88	22	
		50	0	20.85	20.84	20.8	22	
64QAM		1	0	22.07	22.05	22.07	22	
		1	25	22.13	21.07	20.96	22	

		1	49	22.28	22.07	21.89	22	
		25	0	20.84	20.66	20.79	21	
		25	13	20.73	20.90	20.84	21	
		25	25	20.79	20.76	20.82	21	
		50	0	20.78	20.78	20.71	21	
LTE Band 5 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20407	20525	20643		
1.4MHz	QPSK	1	0	17.46	17.30	17.31	19	
		1	2	17.14	17.17	16.88	19	
		1	5	17.34	17.30	17.28	19	
		3	0	17.35	17.34	17.27	19	
		3	2	17.43	17.33	17.27	19	
		3	3	17.31	17.34	17.35	19	
	16QAM	6	0	17.36	17.35	17.28	19	
		1	0	17.63	17.56	17.45	19	
		1	2	17.24	17.24	17.33	19	
		1	5	17.53	17.54	17.54	19	
		3	0	17.36	17.30	17.30	19	
		3	2	17.33	17.27	17.28	19	
	64QAM	3	3	17.27	17.24	17.25	19	
		6	0	17.28	17.29	17.24	19	
		1	0	17.53	17.49	17.40	19	
		1	2	17.17	17.14	17.25	19	
		1	5	17.43	17.45	17.48	19	
		3	0	17.29	17.25	17.22	19	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20415	20525	20635	
	3MHz	QPSK	1	0	17.51	17.39	17.40	19
1			7	17.21	17.24	16.96	19	
1			14	17.43	17.40	17.34	19	
8			0	17.45	17.42	17.35	19	
8			4	17.48	17.38	17.35	19	
8			7	17.39	17.43	17.42	19	
15			0	17.45	17.43	17.37	19	
16QAM		1	0	17.69	17.64	17.53	19	
		1	7	17.31	17.32	17.40	19	
		1	14	17.59	17.61	17.62	19	
		8	0	17.44	17.39	17.36	19	
		8	4	17.41	17.36	17.35	19	
		8	7	17.35	17.31	17.33	19	
64QAM		15	0	17.37	17.38	17.31	19	
			1	0	17.63	17.55	17.45	19

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20425	20525	20625		
		1	7	17.22	17.27	17.33	19	
		1	14	17.53	17.53	17.53	19	
		8	0	17.39	17.34	17.28	19	
		8	4	17.33	17.31	17.30	19	
		8	7	17.29	17.22	17.23	19	
		15	0	17.29	17.29	17.21	19	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20450	20525	20600		
5MHz	QPSK	1	0	17.58	17.47	17.48	19	
		1	13	17.27	17.29	17.02	19	
		1	24	17.52	17.46	17.44	19	
		12	0	17.54	17.48	17.45	19	
		12	6	17.54	17.47	17.44	19	
		12	13	17.47	17.50	17.50	19	
		25	0	17.51	17.50	17.45	19	
	16QAM	1	0	17.74	17.72	17.60	19	
		1	13	17.37	17.42	17.47	19	
		1	24	17.68	17.70	17.68	19	
		12	0	17.50	17.46	17.42	19	
		12	6	17.46	17.44	17.44	19	
		12	13	17.44	17.38	17.42	19	
		25	0	17.44	17.44	17.40	19	
	64QAM	1	0	17.68	17.66	17.53	19	
		1	13	17.31	17.32	17.38	19	
		1	24	17.63	17.63	17.60	19	
		12	0	17.42	17.38	17.32	19	
		12	6	17.38	17.34	17.35	19	
		12	13	17.35	17.33	17.34	19	
		25	0	17.34	17.37	17.33	19	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20450	20525	20600	
	10MHz	QPSK	1	0	17.63	17.55	17.54	19
1			25	17.32	17.37	17.12	19	
1			49	17.58	17.53	17.51	19	
25			0	17.64	17.58	17.52	19	
25			13	17.6	17.57	17.51	19	
25			25	17.56	17.56	17.56	19	
50			0	17.6	17.57	17.54	19	
16QAM		1	0	17.82	17.81	17.66	19	
		1	25	17.46	17.51	17.54	19	
		1	49	17.76	17.79	17.76	19	
		25	0	17.57	17.53	17.48	19	
		25	13	17.55	17.54	17.49	19	
		25	25	17.52	17.47	17.48	19	
		50	0	17.54	17.51	17.48	19	
64QAM		1	0	17.75	17.75	17.61	19	
		1	25	17.41	17.42	17.48	19	

		1	49	17.67	17.70	17.68	19	
		25	0	17.48	17.45	17.39	19	
		25	13	17.50	17.44	17.41	19	
		25	25	17.43	17.38	17.42	19	
		50	0	17.45	17.43	17.39	19	
LTE Band 5 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20407	20525	20643		
1.4MHz	QPSK	1	0	16.85	16.82	16.74	18.5	
		1	2	16.48	16.44	16.47	18.5	
		1	5	16.83	16.73	16.77	18.5	
		3	0	16.84	16.79	16.76	18.5	
		3	2	16.88	16.81	16.76	18.5	
		3	3	16.80	16.77	16.82	18.5	
	16QAM	6	0	16.83	16.82	16.73	18.5	
		1	0	17.15	17.08	17.02	18.5	
		1	2	16.90	17.11	16.85	18.5	
		1	5	17.05	17.09	17.07	18.5	
		3	0	16.91	16.74	16.73	18.5	
		3	2	16.75	16.76	16.69	18.5	
	64QAM	3	3	16.74	16.76	16.72	18.5	
		6	0	16.76	16.79	16.67	18.5	
		1	0	17.07	16.98	16.94	18.5	
		1	2	16.83	17.02	16.78	18.5	
		1	5	16.96	17.03	17.00	18.5	
		3	0	16.85	16.65	16.65	18.5	
	3MHz	QPSK	3	2	16.70	16.67	16.60	18.5
			3	3	16.68	16.70	16.66	18.5
			6	0	16.70	16.74	16.58	18.5
1			0	16.91	16.88	16.82	18.5	
1			7	16.58	16.54	16.56	18.5	
1			14	16.89	16.81	16.82	18.5	
16QAM		8	0	16.94	16.86	16.82	18.5	
		8	4	16.98	16.87	16.82	18.5	
		8	7	16.85	16.86	16.91	18.5	
		15	0	16.91	16.88	16.82	18.5	
		1	0	17.22	17.16	17.10	18.5	
		1	7	16.98	17.17	16.93	18.5	
64QAM		1	14	17.11	17.15	17.15	18.5	
		8	0	16.96	16.83	16.81	18.5	
		8	4	16.84	16.86	16.76	18.5	
		8	7	16.82	16.82	16.81	18.5	
		15	0	16.86	16.89	16.77	18.5	
		1	0	17.15	17.09	17.03	18.5	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20425	20525	20625		
		1	7	16.91	17.08	16.88	18.5	
		1	14	17.04	17.07	17.06	18.5	
		8	0	16.86	16.76	16.74	18.5	
		8	4	16.74	16.80	16.70	18.5	
		8	7	16.74	16.76	16.74	18.5	
		15	0	16.77	16.81	16.69	18.5	
5MHz	QPSK	1	0	17.01	16.95	16.91	18.5	
		1	13	16.65	16.62	16.64	18.5	
		1	24	16.94	16.88	16.90	18.5	
		12	0	17.01	16.95	16.89	18.5	
		12	6	17.06	16.96	16.89	18.5	
		12	13	16.94	16.91	16.96	18.5	
		25	0	17.00	16.96	16.89	18.5	
	16QAM	1	0	17.30	17.24	17.18	18.5	
		1	13	17.07	17.25	17.02	18.5	
		1	24	17.16	17.23	17.22	18.5	
		12	0	17.02	16.92	16.89	18.5	
		12	6	16.93	16.92	16.85	18.5	
		12	13	16.91	16.92	16.88	18.5	
		25	0	16.91	16.94	16.83	18.5	
	64QAM	1	0	17.21	17.18	17.09	18.5	
		1	13	17.00	17.19	16.95	18.5	
		1	24	17.07	17.16	17.15	18.5	
		12	0	16.96	16.87	16.81	18.5	
		12	6	16.86	16.84	16.77	18.5	
		12	13	16.86	16.86	16.81	18.5	
		25	0	16.85	16.85	16.76	18.5	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20450	20525	20600	
	10MHz	QPSK	1	0	17.08	17.05	17	18.5
1			25	16.73	16.67	16.7	18.5	
1			49	17.04	16.96	16.98	18.5	
25			0	17.1	17.04	16.98	18.5	
25			13	17.12	17.02	16.99	18.5	
25			25	17.04	16.97	17.02	18.5	
50			0	17.08	17.04	16.95	18.5	
16QAM		1	0	17.38	17.31	17.26	18.5	
		1	25	17.13	17.33	17.08	18.5	
		1	49	17.26	17.32	17.31	18.5	
		25	0	17.08	16.98	16.98	18.5	
		25	13	17	17	16.94	18.5	
		25	25	16.98	16.98	16.97	18.5	
		50	0	17.01	17.01	16.93	18.5	
64QAM		1	0	17.28	17.23	17.18	18.5	
		1	25	17.06	17.24	17.00	18.5	

		1	49	17.17	17.25	17.23	18.5	
		25	0	16.99	16.92	16.91	18.5	
		25	13	16.92	16.91	16.89	18.5	
		25	25	16.92	16.89	16.89	18.5	
		50	0	16.95	16.95	16.86	18.5	
LTE Band 5 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20407	20525	20643		
1.4MHz	QPSK	1	0	20.01	19.97	19.93	21	
		1	2	19.37	20.03	19.25	21	
		1	5	19.96	19.92	19.85	21	
		3	0	20.01	19.88	19.56	21	
		3	2	19.85	19.76	19.84	21	
		3	3	19.94	19.51	19.95	21	
	16QAM	6	0	19.23	19.94	19.83	21	
		1	0	20.12	20.34	19.88	21	
		1	2	20.26	20.26	20.33	21	
		1	5	20.1	20.06	20.02	21	
		3	0	20.12	19.81	19.82	21	
		3	2	19.32	19.73	19.69	21	
	64QAM	3	3	19.88	20.12	19.51	21	
		6	0	19.62	20.05	19.67	21	
		1	0	20.04	20.29	19.79	21	
		1	2	20.19	20.19	20.26	21	
		1	5	20.01	20.01	19.93	21	
		3	0	20.05	19.74	19.76	21	
	3MHz	QPSK	3	2	19.26	19.64	19.64	21
			3	3	19.82	20.05	19.42	21
			6	0	19.53	19.99	19.57	21
1			0	20.1	19.84	19.84	21	
1			7	20.25	19.87	18.52	21	
1			14	20	19.96	19.86	21	
8			0	20	19.82	19.79	21	
16QAM		8	4	19.99	19.92	19.84	21	
		8	7	19.57	19.99	19.87	21	
		15	0	19.88	19.76	19.99	21	
		1	0	20.27	20.49	20.2	21	
		1	7	19.04	20.22	20.2	21	
		1	14	20.09	20.17	20.09	21	
		8	0	19.83	19.86	19.83	21	
64QAM		8	4	19.9	19.76	19.49	21	
	8	7	19.97	19.9	19.56	21		
	15	0	19.95	19.84	19.82	21		
		1	0	20.18	20.40	20.12	21	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20425	20525	20625	
5MHz	QPSK	1	7	18.95	20.14	20.11	21
		1	14	20.03	20.11	20.04	21
		8	0	19.73	19.78	19.77	21
		8	4	19.83	19.67	19.41	21
		8	7	19.89	19.83	19.46	21
		15	0	19.88	19.77	19.73	21
	16QAM	1	0	19.94	19.92	19.94	21
		1	13	20.11	19.87	19.86	21
		1	24	19.88	19.77	19.75	21
		12	0	20.08	20.02	19.88	21
		12	6	19.91	19.89	19.71	21
		12	13	20.01	19.89	19.91	21
	64QAM	25	0	19.93	19.86	19.87	21
		1	0	20.38	20.38	20.22	21
		1	13	20.36	20.29	20.01	21
		1	24	20.35	20.35	19.49	21
		12	0	19.97	19.87	19.85	21
		12	6	19.81	19.86	19.96	21
10MHz	QPSK	12	13	19.9	19.95	19.84	21
		25	0	19.97	19.76	19.72	21
		1	0	20.28	20.31	20.12	21
		1	13	20.27	20.22	19.94	21
		1	24	20.26	20.27	19.41	21
		12	0	19.88	19.78	19.77	21
16QAM	12	6	19.73	19.81	19.90	21	
	12	13	19.82	19.89	19.76	21	
	25	0	19.90	19.67	19.67	21	
	1	0	20.08	19.85	19.88	21	
	1	25	20.33	19.99	20.2	21	
	1	49	19.96	19.81	19.95	21	
64QAM	25	0	20.01	19.95	19.89	21	
	25	13	19.87	19.81	19.86	21	
	25	25	19.96	19.93	19.87	21	
	50	0	19.89	19.84	19.82	21	
	1	0	20.21	20.36	20.31	21	
	1	25	19.75	20.42	19.83	21	
10MHz	16QAM	1	49	20	20.11	20.31	21
		25	0	19.81	19.89	19.85	21
		25	13	19.82	19.82	19.92	21
		25	25	19.9	19.83	19.87	21
		50	0	19.95	19.85	19.88	21
		1	0	20.13	20.31	20.22	21
10MHz	64QAM	1	25	19.69	20.33	19.77	21

		1	49	19.94	20.05	20.22	21
		25	0	19.74	19.84	19.77	21
		25	13	19.74	19.72	19.85	21
		25	25	19.82	19.74	19.77	21
		50	0	19.86	19.77	19.82	21

LTE Band 7 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	14.89	15.15	15.35	16.1
		1	13	14.88	15.2	15.36	16.1
		1	24	14.93	15.19	15.35	16.1
		12	0	14.95	15.21	15.35	16.1
		12	6	14.83	15.26	15.34	16.1
		12	13	14.96	15.22	15.41	16.1
		25	0	14.86	15.24	15.33	16.1
	16QAM	1	0	15.14	15.6	15.64	16.1
		1	13	15.2	15.51	15.6	16.1
		1	24	15.26	15.59	15.7	16.1
		12	0	14.86	15.17	15.3	16.1
		12	6	14.87	15.08	15.27	16.1
		12	13	14.83	15.17	15.32	16.1
		25	0	14.82	15.16	15.3	16.1
	64QAM	1	0	15.06	15.58	15.59	16.1
		1	13	15.06	15.37	15.43	16.1
		1	24	15.18	15.47	15.62	16.1
		12	0	14.71	15.10	15.14	16.1
		12	6	14.80	14.96	15.20	16.1
		12	13	14.69	15.03	15.17	16.1
		25	0	14.68	15.12	15.16	16.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz	QPSK	1	0	14.89	15.16	15.31	16.1
		1	25	14.71	14.85	14.99	16.1
		1	49	15.01	15.27	15.38	16.1
		25	0	14.88	15.15	15.33	16.1
		25	13	14.95	15.14	15.32	16.1
		25	25	14.98	15.2	15.38	16.1
		50	0	14.89	15.2	15.31	16.1
	16QAM	1	0	15.19	15.47	15.61	16.1
		1	25	14.87	15.41	15.44	16.1
		1	49	15.37	15.47	15.74	16.1
		25	0	14.8	15.12	15.26	16.1
		25	13	14.86	15.13	15.26	16.1
		25	25	14.94	15.14	15.3	16.1
		50	0	14.81	15.13	15.24	16.1
	64QAM	1	0	15.15	15.43	15.54	16.1
		1	25	14.80	15.25	15.26	16.1
		1	49	15.27	15.36	15.62	16.1
		25	0	14.63	14.96	15.25	16.1
		25	13	14.79	15.07	15.12	16.1

Bandwidth	Modulation	25	25	14.87	15.11	15.29	16.1
		50	0	14.80	15.07	15.18	16.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	14.82	15.06	15.26	16.1
		1	38	15.05	15.28	15.38	16.1
		1	74	15.1	15.34	15.39	16.1
		36	0	14.92	15.24	15.37	16.1
		36	18	15	15.24	15.33	16.1
		36	39	15.1	15.27	15.38	16.1
		75	0	14.97	15.23	15.39	16.1
	16QAM	1	0	15.23	15.44	15.66	16.1
		1	38	15.37	15.55	15.69	16.1
		1	74	15.41	15.57	15.64	16.1
		36	0	14.86	15.18	15.3	16.1
		36	18	14.94	15.22	15.34	16.1
		36	39	15.04	15.23	15.38	16.1
		75	0	14.89	15.19	15.34	16.1
	64QAM	1	0	15.07	15.35	15.58	16.1
		1	38	15.32	15.37	15.63	16.1
		1	74	15.35	15.54	15.59	16.1
		36	0	14.83	15.01	15.28	16.1
		36	18	14.77	15.10	15.24	16.1
		36	39	14.86	15.13	15.23	16.1
		75	0	14.78	15.14	15.15	16.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	14.64	14.85	15.08	16.1
		1	50	14.8	15.04	15.16	16.1
		1	99	15.21	15.37	15.51	16.1
		50	0	14.95	15.19	15.32	16.1
		50	25	14.98	15.18	15.32	16.1
		50	50	15.11	15.31	15.37	16.1
		100	0	15.02	15.22	15.35	16.1
	16QAM	1	0	14.9	15.33	15.5	16.1
		1	50	15.35	15.01	15.34	16.1
		1	99	15.39	15.78	15.9	16.1
		50	0	14.89	15.09	15.29	16.1
		50	25	14.91	15.11	15.25	16.1
		50	50	15.01	15.22	15.32	16.1
		100	0	14.93	15.11	15.26	16.1
	64QAM	1	0	14.83	15.32	15.45	16.1
		1	50	15.16	14.85	15.27	16.1
		1	99	15.21	15.71	15.82	16.1
		50	0	14.73	14.96	15.23	16.1
		50	25	14.73	15.04	15.24	16.1
		50	50	14.89	15.09	15.29	16.1

		100	0	14.87	15.00	15.19	16.1
LTE Band 7 Receiver on(Right head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	11.38	11.64	11.78	12.6
		1	13	11.35	11.71	11.84	12.6
		1	24	11.39	11.68	11.8	12.6
		12	0	11.39	11.68	11.84	12.6
		12	6	11.37	11.6	11.77	12.6
		12	13	11.39	11.7	11.86	12.6
		25	0	11.36	11.69	11.82	12.6
	16QAM	1	0	11.74	11.9	12.16	12.6
		1	13	11.68	11.96	12.16	12.6
		1	24	11.76	12.14	12.21	12.6
		12	0	11.34	11.65	11.72	12.6
		12	6	11.33	11.68	11.78	12.6
		12	13	11.34	11.64	11.81	12.6
		25	0	11.29	11.57	11.69	12.6
	64QAM	1	0	11.62	11.90	12.02	12.6
		1	13	11.50	11.86	12.02	12.6
		1	24	11.73	12.02	12.04	12.6
		12	0	11.16	11.51	11.53	12.6
		12	6	11.21	11.60	11.74	12.6
		12	13	11.19	11.58	11.80	12.6
		25	0	11.27	11.42	11.69	12.6
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	1	0	11.32	11.63	11.76	12.6
		1	25	11.25	11.43	11.83	12.6
		1	49	11.5	11.81	11.74	12.6
		25	0	11.34	11.66	11.79	12.6
		25	13	11.4	11.68	11.78	12.6
		25	25	11.47	11.71	11.87	12.6
		50	0	11.4	11.69	11.79	12.6
	16QAM	1	0	11.81	12.07	12.11	12.6
		1	25	11.93	12.05	12.2	12.6
		1	49	12	12.24	12.02	12.6
		25	0	11.29	11.58	11.72	12.6
		25	13	11.33	11.6	11.74	12.6
		25	25	11.37	11.64	11.8	12.6
		50	0	11.29	11.55	11.73	12.6
	64QAM	1	0	11.69	11.88	12.00	12.6
		1	25	11.90	11.86	12.10	12.6
		1	49	11.96	12.07	11.95	12.6
		25	0	11.24	11.56	11.72	12.6
		25	13	11.27	11.47	11.66	12.6

Bandwidth	Modulation	25	25	11.18	11.49	11.79	12.6
		50	0	11.23	11.41	11.62	12.6
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	11.24	11.5	11.71	12.6
		1	38	11.44	11.66	11.93	12.6
		1	74	11.55	11.71	11.87	12.6
		36	0	11.41	11.64	11.81	12.6
		36	18	11.5	11.72	11.85	12.6
		36	39	11.57	11.75	11.83	12.6
		75	0	11.46	11.67	11.81	12.6
	16QAM	1	0	11.62	11.75	12.03	12.6
		1	38	11.93	11.92	12.09	12.6
		1	74	11.9	12.07	12.14	12.6
		36	0	11.34	11.61	11.75	12.6
		36	18	11.4	11.62	11.81	12.6
		36	39	11.49	11.65	11.8	12.6
		75	0	11.37	11.64	11.75	12.6
	64QAM	1	0	11.53	11.56	11.97	12.6
		1	38	11.82	11.82	11.98	12.6
		1	74	11.89	11.89	12.12	12.6
		36	0	11.26	11.45	11.71	12.6
		36	18	11.31	11.55	11.76	12.6
		36	39	11.47	11.62	11.79	12.6
		75	0	11.19	11.63	11.66	12.6
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	11.09	11.37	11.5	12.6
		1	50	11.54	11.68	11.69	12.6
		1	99	11.68	11.85	11.97	12.6
		50	0	11.42	11.64	11.78	12.6
		50	25	11.48	11.7	11.82	12.6
		50	50	11.59	11.77	11.86	12.6
		100	0	11.53	11.65	11.8	12.6
	16QAM	1	0	11.66	11.67	11.85	12.6
		1	50	11.84	11.92	11.98	12.6
		1	99	12.12	12.45	12.39	12.6
		50	0	11.36	11.6	11.73	12.6
		50	25	11.42	11.63	11.72	12.6
		50	50	11.53	11.73	11.81	12.6
		100	0	11.41	11.59	11.73	12.6
	64QAM	1	0	11.52	11.55	11.72	12.6
		1	50	11.79	11.77	11.90	12.6
		1	99	11.99	12.29	12.22	12.6
		50	0	11.29	11.45	11.56	12.6
		50	25	11.29	11.54	11.62	12.6
		50	50	11.38	11.70	11.68	12.6

		100	0	11.26	11.44	11.65	12.6
LTE Band 7 Receiver off (Body Scene)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	18.89	19.14	19.26	20.1
		1	13	18.87	19.19	19.34	20.1
		1	24	18.91	19.24	19.35	20.1
		12	0	18.96	19.25	19.31	20.1
		12	6	18.86	19.15	19.33	20.1
		12	13	18.9	19.23	19.32	20.1
		25	0	18.89	19.16	19.33	20.1
	16QAM	1	0	19.24	19.54	19.61	20.1
		1	13	19.26	19.41	19.58	20.1
		1	24	19.2	19.59	19.57	20.1
		12	0	18.89	19.16	19.27	20.1
		12	6	18.71	19.07	19.23	20.1
		12	13	18.86	19.21	19.3	20.1
		25	0	18.82	19.14	19.3	20.1
	64QAM	1	0	19.09	19.43	19.54	20.1
		1	13	19.17	19.32	19.55	20.1
		1	24	19.05	19.56	19.52	20.1
		12	0	18.88	19.06	19.18	20.1
		12	6	18.61	19.01	19.19	20.1
		12	13	18.71	19.20	19.27	20.1
		25	0	18.74	19.13	19.16	20.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20800	21100	21400	
10MHz	QPSK	1	0	18.89	19.14	19.29	20.1
		1	25	18.66	18.96	19.09	20.1
		1	49	18.98	19.27	19.37	20.1
		25	0	18.85	19.16	19.3	20.1
		25	13	18.91	19.2	19.31	20.1
		25	25	18.98	19.23	19.33	20.1
		50	0	18.87	19.18	19.3	20.1
	16QAM	1	0	19.14	19.47	19.55	20.1
		1	25	19.21	19.46	19.21	20.1
		1	49	19.33	19.59	19.51	20.1
		25	0	18.84	19.13	19.25	20.1
		25	13	18.86	19.14	19.25	20.1
		25	25	18.96	19.18	19.29	20.1
		50	0	18.8	19.13	19.26	20.1
	64QAM	1	0	19.08	19.30	19.47	20.1
		1	25	19.19	19.35	19.06	20.1
		1	49	19.16	19.54	19.48	20.1
		25	0	18.66	18.99	19.12	20.1
		25	13	18.79	19.06	19.15	20.1

Bandwidth	Modulation	25	25	18.85	19.10	19.21	20.1
		50	0	18.62	18.99	19.15	20.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	18.85	19.04	19.21	20.1
		1	38	19	19.22	19.36	20.1
		1	74	19.05	19.24	19.37	20.1
		36	0	18.91	19.18	19.35	20.1
		36	18	18.97	19.21	19.34	20.1
		36	39	19.09	19.31	19.39	20.1
		75	0	18.98	19.24	19.31	20.1
	16QAM	1	0	19.14	19.44	19.59	20.1
		1	38	19.31	19.52	19.71	20.1
		1	74	19.39	19.57	19.53	20.1
		36	0	18.9	19.12	19.27	20.1
		36	18	18.93	19.14	19.31	20.1
		36	39	19.01	19.27	19.31	20.1
		75	0	18.96	19.15	19.27	20.1
	64QAM	1	0	19.11	19.43	19.49	20.1
		1	38	19.24	19.50	19.64	20.1
		1	74	19.22	19.50	19.50	20.1
		36	0	18.85	18.99	19.19	20.1
		36	18	18.90	19.10	19.14	20.1
		36	39	18.99	19.08	19.27	20.1
		75	0	18.80	19.10	19.24	20.1
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	18.7	18.91	19.08	20.1
		1	50	19.1	19.2	19.23	20.1
		1	99	19.26	19.42	19.5	20.1
		50	0	18.99	19.19	19.33	20.1
		50	25	18.98	19.17	19.28	20.1
		50	50	19.17	19.32	19.39	20.1
		100	0	19.07	19.23	19.34	20.1
	16QAM	1	0	18.96	19.23	19.41	20.1
		1	50	19.02	19.56	19.54	20.1
		1	99	19.57	19.72	19.79	20.1
		50	0	18.91	19.09	19.24	20.1
		50	25	18.95	19.12	19.21	20.1
		50	50	19.08	19.19	19.34	20.1
		100	0	18.97	19.16	19.28	20.1
	64QAM	1	0	18.79	19.08	19.26	20.1
		1	50	18.93	19.54	19.53	20.1
		1	99	19.48	19.68	19.68	20.1
		50	0	18.85	18.92	19.20	20.1
		50	25	18.78	19.06	19.11	20.1
		50	50	18.97	19.13	19.19	20.1

		100	0	18.88	19.11	19.14	20.1
--	--	-----	---	-------	-------	-------	------

LTE Band 7 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20775	21100	21425		
5MHz	QPSK	1	0	13.65	14.26	14.31	14.6	
		1	13	13.91	14.25	14.29	14.6	
		1	24	13.69	14.06	14.26	14.6	
		12	0	13.78	14.18	14.21	14.6	
		12	6	13.80	13.95	14.24	14.6	
		12	13	13.81	14.19	14.28	14.6	
		25	0	13.85	14.20	14.17	14.6	
	16QAM	1	0	13.59	14.02	14.56	14.6	
		1	13	14.17	14.48	14.68	14.6	
		1	24	14.18	14.48	14.59	14.6	
		12	0	13.62	13.97	14.24	14.6	
		12	6	13.79	14.16	14.18	14.6	
		12	13	13.73	14.26	14.17	14.6	
		25	0	13.71	14.04	14.00	14.6	
	64QAM	1	0	13.47	13.93	14.44	14.6	
		1	13	14.08	14.33	14.54	14.6	
		1	24	14.18	14.40	14.47	14.6	
		12	0	13.58	13.92	14.09	14.6	
		12	6	13.60	14.16	14.17	14.6	
		12	13	13.65	14.24	14.04	14.6	
		25	0	13.63	13.97	13.94	14.6	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	10MHz	QPSK			20800	21100	21400	
			1	0	13.78	14.26	14.31	14.6
1			25	13.9	14.12	13.74	14.6	
1			49	13.98	14.31	14.32	14.6	
25			0	13.94	14.17	14.14	14.6	
25			13	13.78	14.22	14.11	14.6	
25			25	13.89	14.21	14.25	14.6	
50		0	13.83	14.13	14.27	14.6		
16QAM		1	0	14.28	14.65	14.68	14.6	
		1	25	13.19	14.06	14.76	14.6	
		1	49	14.45	14.62	14.62	14.6	
		25	0	13.73	13.95	14.1	14.6	
		25	13	13.87	14.07	14.2	14.6	
		25	25	13.85	14.21	14.26	14.6	
		50	0	13.79	14.09	14.02	14.6	
64QAM		1	0	14.09	14.60	14.62	14.6	
		1	25	13.03	14.06	14.62	14.6	
		1	49	14.35	14.61	14.45	14.6	
		25	0	13.63	13.84	14.08	14.6	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	25	13	13.80	13.88	14.03	14.6
		25	25	13.76	14.14	14.26	14.6
		50	0	13.77	13.96	14.00	14.6
		1	0	13.71	14.25	14.31	14.6
		1	38	13.83	14.06	13.66	14.6
		1	74	13.94	14.30	14.29	14.6
		36	0	13.87	14.13	14.10	14.6
	16QAM	36	18	13.69	14.15	14.06	14.6
		36	39	13.82	14.19	14.22	14.6
		75	0	13.78	14.04	14.19	14.6
		1	0	14.22	14.63	14.62	14.6
		1	38	13.12	14.01	14.71	14.6
		1	74	14.41	14.62	14.52	14.6
		36	0	13.67	13.91	14.01	14.6
	64QAM	36	18	13.82	14.05	14.16	14.6
		36	39	13.79	14.18	14.24	14.6
		75	0	13.70	14.01	13.99	14.6
		1	0	14.06	14.52	14.54	14.6
		1	38	12.96	13.98	14.57	14.6
		1	74	14.31	14.55	14.41	14.6
		36	0	13.59	13.74	14.08	14.6
20MHz	QPSK	36	18	13.78	13.81	13.96	14.6
		36	39	13.70	14.06	14.22	14.6
		75	0	13.74	13.95	13.99	14.6
		1	0	13.66	14.04	14.06	14.6
		1	50	14.20	13.65	13.29	14.6
		1	99	14.23	14.41	14.49	14.6
		50	0	13.93	14.21	14.31	14.6
	16QAM	50	25	14.03	14.23	14.25	14.6
		50	50	14.19	14.34	14.31	14.6
		100	0	14.12	14.33	14.23	14.6
		1	0	14.25	14.23	14.19	14.6
		1	50	14.31	14.04	13.76	14.6
		1	99	14.61	14.56	14.68	14.6
		50	0	13.81	14.14	14.21	14.6
	64QAM	50	25	13.95	14.14	14.19	14.6
		50	50	13.98	14.22	14.10	14.6
		100	0	14.05	14.12	14.18	14.6
		1	0	14.11	14.21	14.00	14.6
		1	50	14.27	14.00	13.76	14.6
		1	99	14.42	14.53	14.67	14.6
		50	0	13.71	14.07	14.16	14.6
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	50	25	13.98	14.22	14.10	14.6
		50	50	13.78	14.11	14.15	14.6

		50	50	13.98	14.20	14.02	14.6
		100	0	14.00	14.04	14.00	14.6

LTE Band 7 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20775	21100	21425		
5MHz	QPSK	1	0	10.20	10.78	10.78	11.1	
		1	13	10.61	10.84	10.48	11.1	
		1	24	10.38	10.85	10.75	11.1	
		12	0	10.34	10.69	10.75	11.1	
		12	6	10.02	10.71	10.53	11.1	
		12	13	10.42	10.81	10.72	11.1	
		25	0	10.39	10.64	10.82	11.1	
	16QAM	1	0	10.71	10.43	10.77	11.1	
		1	13	10.45	10.44	11.17	11.1	
		1	24	10.08	11.22	11.26	11.1	
		12	0	10.13	10.61	10.72	11.1	
		12	6	10.12	10.54	10.84	11.1	
		12	13	10.29	10.70	10.84	11.1	
		25	0	10.23	10.50	10.73	11.1	
	64QAM	1	0	10.63	10.30	10.76	11.1	
		1	13	10.30	10.29	11.10	11.1	
		1	24	9.90	11.06	11.23	11.1	
		12	0	10.01	10.42	10.54	11.1	
		12	6	10.07	10.35	10.77	11.1	
		12	13	10.18	10.64	10.66	11.1	
		25	0	10.19	10.43	10.65	11.1	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20800	21100	21400	
	10MHz	QPSK	1	0	10.46	10.67	10.96	11.1
1			25	9.55	10.94	10.56	11.1	
1			49	10.35	10.71	10.34	11.1	
25			0	10.19	10.62	10.70	11.1	
25			13	10.37	10.61	10.68	11.1	
25			25	10.50	10.64	10.70	11.1	
50			0	10.29	10.65	10.72	11.1	
16QAM		1	0	10.61	10.70	10.91	11.1	
		1	25	10.38	10.67	10.84	11.1	
		1	49	10.66	11.10	10.78	11.1	
		25	0	10.20	10.47	10.54	11.1	
		25	13	10.38	10.51	10.68	11.1	
		25	25	10.36	10.62	10.61	11.1	
		50	0	10.25	10.52	10.58	11.1	
64QAM		1	0	10.47	10.59	10.87	11.1	
		1	25	10.20	10.61	10.81	11.1	
		1	49	10.64	11.05	10.70	11.1	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				20825	21100	21375		
15MHz	QPSK	25	0	10.13	10.35	10.36	11.1	
		25	13	10.29	10.43	10.57	11.1	
		25	25	10.24	10.45	10.42	11.1	
		50	0	10.20	10.41	10.50	11.1	
	QPSK	1	0	10.36	10.68	10.62	11.1	
		1	38	10.52	11.08	10.95	11.1	
		1	74	10.54	10.75	10.78	11.1	
		36	0	10.44	10.80	10.73	11.1	
		36	18	10.43	10.69	10.75	11.1	
		36	39	10.59	10.73	10.82	11.1	
		75	0	10.40	10.63	10.80	11.1	
	16QAM	1	0	10.48	10.90	11.11	11.1	
		1	38	10.33	11.75	10.90	11.1	
		1	74	10.24	11.18	11.11	11.1	
		36	0	10.32	10.68	10.71	11.1	
		36	18	10.39	10.48	10.64	11.1	
		36	39	10.46	10.77	10.66	11.1	
		75	0	10.29	10.67	10.79	11.1	
	64QAM	1	0	10.30	10.82	10.93	11.1	
		1	38	10.18	11.75	10.82	11.1	
		1	74	10.17	11.04	10.93	11.1	
		36	0	10.28	10.59	10.61	11.1	
		36	18	10.36	10.47	10.56	11.1	
		36	39	10.28	10.76	10.63	11.1	
		75	0	10.11	10.60	10.77	11.1	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					20850	21100	21350	
	20MHz	QPSK	1	0	10.26	10.35	10.39	11.1
1			50	10.24	10.38	10.79	11.1	
1			99	10.78	10.94	10.76	11.1	
50			0	10.53	10.73	10.76	11.1	
50			25	10.51	10.79	10.62	11.1	
50			50	10.71	10.76	10.95	11.1	
100			0	10.50	10.71	10.65	11.1	
16QAM		1	0	10.42	10.80	10.75	11.1	
		1	50	9.85	10.53	10.17	11.1	
		1	99	10.79	11.00	10.88	11.1	
		50	0	10.43	10.62	10.63	11.1	
		50	25	10.46	10.65	10.69	11.1	
		50	50	10.51	10.61	10.72	11.1	
		100	0	10.46	10.79	10.69	11.1	
64QAM		1	0	10.31	10.75	10.68	11.1	
		1	50	9.81	10.38	10.07	11.1	
		1	99	10.61	10.93	10.72	11.1	
		50	0	10.41	10.58	10.60	11.1	

		50	25	10.39	10.47	10.62	11.1
		50	50	10.41	10.60	10.69	11.1
		100	0	10.45	10.64	10.56	11.1

LTE Band 7 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20775	21100	21425	
5MHz	QPSK	1	0	17.34	17.66	17.77	18.6
		1	13	17.38	17.67	17.82	18.6
		1	24	17.43	17.68	17.83	18.6
		12	0	17.41	17.72	17.85	18.6
		12	6	17.34	17.67	17.79	18.6
		12	13	17.42	17.77	17.91	18.6
		25	0	17.36	17.7	17.81	18.6
	16QAM	1	0	17.61	17.94	18.15	18.6
		1	13	17.68	18	18.18	18.6
		1	24	17.68	18.08	18.21	18.6
		12	0	17.37	17.66	17.77	18.6
		12	6	17.29	17.72	17.74	18.6
		12	13	17.39	17.68	17.84	18.6
		25	0	17.28	17.61	17.81	18.6
	64QAM	1	0	17.51	17.78	18.13	18.6
		1	13	17.61	17.82	18.11	18.6
		1	24	17.57	17.90	18.07	18.6
		12	0	17.23	17.51	17.63	18.6
		12	6	17.21	17.54	17.62	18.6
		12	13	17.38	17.56	17.80	18.6
		25	0	17.17	17.52	17.70	18.6
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz	QPSK			20800	21100	21400	
		1	0	17.37	17.62	17.76	18.6
		1	25	17.07	17.41	17.51	18.6
		1	49	17.49	17.71	17.84	18.6
		25	0	17.37	17.69	17.83	18.6
		25	13	17.42	17.73	17.87	18.6
		25	25	17.46	17.71	17.87	18.6
	16QAM	50	0	17.36	17.69	17.82	18.6
		1	0	17.68	17.88	17.95	18.6
		1	25	17.75	17.61	17.96	18.6
		1	49	17.9	18.07	18.11	18.6
		25	0	17.37	17.66	17.78	18.6
		25	13	17.36	17.59	17.73	18.6
		25	25	17.44	17.64	17.79	18.6
	64QAM	50	0	17.31	17.61	17.74	18.6
		1	0	17.59	17.74	17.88	18.6
		1	25	17.69	17.50	17.96	18.6

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20825	21100	21375	
15MHz	QPSK	1	0	17.31	17.53	17.76	18.6
		1	38	17.46	17.7	17.86	18.6
		1	74	17.52	17.78	17.83	18.6
		36	0	17.4	17.69	17.85	18.6
		36	18	17.45	17.7	17.82	18.6
		36	39	17.61	17.76	17.84	18.6
		75	0	17.5	17.7	17.85	18.6
	16QAM	1	0	17.6	17.82	18.06	18.6
		1	38	17.75	18	18.09	18.6
		1	74	17.92	18.09	18.08	18.6
		36	0	17.39	17.63	17.81	18.6
		36	18	17.48	17.66	17.81	18.6
		36	39	17.54	17.72	17.79	18.6
		75	0	17.41	17.58	17.73	18.6
	64QAM	1	0	17.51	17.64	17.88	18.6
1		38	17.57	17.99	18.07	18.6	
1		74	17.90	18.00	17.94	18.6	
36		0	17.28	17.58	17.81	18.6	
36		18	17.43	17.48	17.75	18.6	
36		39	17.46	17.71	17.73	18.6	
75		0	17.27	17.54	17.65	18.6	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				20850	21100	21350	
20MHz	QPSK	1	0	17.16	17.37	17.53	18.6
		1	50	17.24	17.48	17.63	18.6
		1	99	17.68	17.86	17.99	18.6
		50	0	17.42	17.7	17.79	18.6
		50	25	17.48	17.68	17.82	18.6
		50	50	17.59	17.81	17.87	18.6
		100	0	17.54	17.68	17.85	18.6
	16QAM	1	0	17.54	17.68	17.92	18.6
		1	50	17.74	18.02	18.16	18.6
		1	99	18.09	18.23	18.26	18.6
		50	0	17.35	17.55	17.72	18.6
		50	25	17.42	17.65	17.74	18.6
		50	50	17.52	17.74	17.8	18.6
		100	0	17.4	17.65	17.78	18.6
	64QAM	1	0	17.49	17.56	17.73	18.6
		1	50	17.74	17.88	18.06	18.6
		1	99	18.04	18.11	18.16	18.6

		50	0	17.26	17.45	17.70	18.6
		50	25	17.25	17.57	17.69	18.6
		50	50	17.37	17.55	17.62	18.6
		100	0	17.26	17.61	17.72	18.6

LTE Band 12 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23017	23095	23173	
1.4MHz	QPSK	1	0	21.89	21.59	21.63	22.4
		1	2	21.84	21.29	22.1	22.4
		1	5	21.86	21.59	21.83	22.4
		3	0	21.82	21.48	21.86	22.4
		3	2	21.56	21.12	21.79	22.4
		3	3	21.8	21.44	21.72	22.4
		6	0	21.76	21.66	21.81	22.4
	16QAM	1	0	22.53	21.84	22.03	22.4
		1	2	21.36	21.3	22.07	22.4
		1	5	22.42	21.96	22.44	22.4
		3	0	21.55	21.61	21.61	22.4
		3	2	21.91	21.34	21.56	22.4
		3	3	22.2	21.55	21.35	22.4
		6	0	21.16	20.88	21.05	22
	64QAM	1	0	22.22	21.48	21.67	22
		1	2	21.06	20.96	21.68	22
		1	5	22.06	21.63	22.08	22
		3	0	21.21	21.27	21.24	22
		3	2	21.60	20.98	21.23	22
		3	3	21.88	21.18	21.01	22
		6	0	20.17	19.94	20.10	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23025	23095	23165	
3MHz	QPSK	1	0	21.8	21.73	21.7	22.4
		1	7	21.54	20.55	21.31	22.4
		1	14	21.73	21.71	21.96	22.4
		8	0	21.4	21.73	21.75	22.4
		8	4	21.89	21.7	21.81	22.4
		8	7	21.98	21.55	21.53	22.4
		15	0	21.95	21.61	21.54	22.4
	16QAM	1	0	21.87	21.72	22.08	22.4
		1	7	21.54	21.69	21.71	22.4
		1	14	22.03	21.85	22.28	22.4
		8	0	21.24	21.12	21.15	22
		8	4	21.14	21.06	20.9	22
		8	7	21.25	20.95	21.31	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23035	23095	23155		
	64QAM	15	0	21.25	21.03	21.04	22	
		1	0	20.96	20.74	21.09	22	
		1	7	20.56	20.78	20.72	22	
		1	14	21.08	20.88	21.34	22	
		8	0	20.32	20.21	20.16	21	
		8	4	20.18	20.10	19.99	21	
		8	7	20.30	19.96	20.40	21	
		15	0	20.32	20.08	20.13	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
5MHz	QPSK	1	0	21.88	21.63	21.91	22.4	
		1	13	21.89	21.68	21.74	22.4	
		1	24	21.82	21.74	21.91	22.4	
		12	0	21.9	21.7	21.82	22.4	
		12	6	21.72	21.47	21.54	22.4	
		12	13	21.92	21.68	21.74	22.4	
		25	0	21.84	21.56	21.83	22.4	
	16QAM	1	0	21.78	21.94	21.55	22.4	
		1	13	22.44	22.18	22.14	22.4	
		1	24	22.03	21.82	22.45	22.4	
		12	0	21.44	21.29	21.15	22	
		12	6	20.88	21.06	21.17	22	
		12	13	21.32	21.16	21.27	22	
		25	0	21.26	21.09	21.38	22	
	64QAM	1	0	20.83	20.94	20.62	22	
		1	13	21.44	21.19	21.18	22	
		1	24	21.05	20.88	21.49	22	
		12	0	20.48	20.34	20.21	21	
		12	6	19.93	20.07	20.20	21	
		12	13	20.34	20.16	20.35	21	
		25	0	20.31	20.15	20.46	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	10MHz	QPSK	1	0	21.71	21.69	21.57	22.4
			1	25	21.15	21.35	21.56	22.4
1			49	21.72	21.85	21.97	22.4	
25			0	21.86	21.72	21.76	22.4	
25			13	21.82	21.63	21.71	22.4	
25			25	21.74	21.61	21.72	22.4	
50			0	21.88	21.61	21.87	22.4	
16QAM		1	0	21.58	22.21	21.95	22.4	
		1	25	22.07	22	22.22	22.4	
		1	49	21.41	21.79	21.92	22.4	
		25	0	21.25	21.12	20.99	22	
		25	13	21.06	20.96	21.07	22	
		25	25	21.2	21.2	21.17	22	
		50	0	21.26	21	21.29	22	

	64QAM	1	0	20.64	21.24	21.01	22
		1	25	21.16	21.09	21.25	22
		1	49	20.44	20.82	20.99	22
		25	0	20.28	20.21	20.02	21
		25	13	20.09	20.04	20.16	21
		25	25	20.24	20.22	20.18	21
		50	0	20.36	20.06	20.30	21

LTE Band 12 Receiver on(Right head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23017	23095	23173	
1.4MHz	QPSK	1	0	21.43	21.25	21.29	22
		1	2	21.71	20.19	20.95	22
		1	5	21.3	21.13	21.36	22
		3	0	21.09	20.95	21.22	22
		3	2	21.14	21.15	21.51	22
		3	3	21.26	21.2	21.15	22
		6	0	21	21.13	21.03	22
	16QAM	1	0	21.64	21.06	21.72	22
		1	2	21.7	20.66	21.71	22
		1	5	21.7	21.71	21.76	22
		3	0	21.35	21.06	21.13	22
		3	2	21.66	21.15	20.92	22
		3	3	21.44	21.28	21.36	22
		6	0	21.4	20.88	20.93	22
	64QAM	1	0	21.57	20.93	21.61	22
		1	2	21.61	20.54	21.58	22
		1	5	21.64	21.66	21.63	22
		3	0	21.27	20.93	21.02	22
		3	2	21.61	21.03	20.82	22
		3	3	21.36	21.13	21.23	22
		6	0	20.47	19.90	20.02	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	21.36	21.14	21.24	22
		1	7	21.28	20.62	20.34	22
		1	14	21.44	21.09	21.34	22
		8	0	21.38	21	21.29	22
		8	4	21.38	21.05	21.34	22
		8	7	21.31	21.03	21.07	22
		15	0	21.36	21.05	21.27	22
	16QAM	1	0	21.52	21.43	21.3	22
		1	7	20.76	20.85	19.21	22
		1	14	21.57	21.42	21.71	22
		8	0	21.26	21.04	21.15	22
		8	4	21.28	21.16	21.19	22
		8	7	21.31	21.03	21.07	22
		15	0	21.36	21.05	21.27	22
		15	7	20.76	20.85	19.21	22

		8	7	21.4	20.94	21.23	22
		15	0	21.33	21.2	21.3	22
	64QAM	1	0	20.54	20.44	20.39	22
		1	7	19.84	19.90	18.22	22
		1	14	20.65	20.47	20.73	22
		8	0	20.31	20.11	20.23	21
		8	4	20.35	20.16	20.27	21
		8	7	20.48	19.99	20.29	21
		15	0	20.41	20.25	20.38	21
Bandwidth		Modulation	RB size	RB offset	Channel 23035	Channel 23095	Channel 23155
5MHz	QPSK	1	0	21.35	21.38	21.14	22
		1	13	21.5	21.36	21.19	22
		1	24	21.38	21.33	21.45	22
		12	0	21.33	21.22	21.22	22
		12	6	21.32	21.1	21.1	22
		12	13	21.28	21.24	21.42	22
		25	0	21.4	21.13	21.21	22
	16QAM	1	0	21.67	21.55	21.31	22
		1	13	21.62	21.47	21.45	22
		1	24	21.42	21.78	21.53	22
		12	0	21.31	21.18	21.2	22
		12	6	21.35	21	21.21	22
		12	13	21.33	21.16	21.32	22
		25	0	21.32	21.05	21.33	22
	64QAM	1	0	20.69	20.60	20.39	22
		1	13	20.70	20.50	20.46	22
		1	24	20.49	20.80	20.63	22
		12	0	20.39	20.18	20.22	21
		12	6	20.40	20.10	20.27	21
		12	13	20.41	20.23	20.34	21
		25	0	20.40	20.09	20.35	21
Bandwidth	Modulation	RB size	RB offset	Channel 23060	Channel 23095	Channel 23130	Tune up
10MHz	QPSK	1	0	21.16	21.12	21.18	22
		1	25	20.84	20.61	20.81	22
		1	49	21.17	21.31	21.4	22
		25	0	21.31	21.21	21.33	22
		25	13	21.26	21.06	21.2	22
		25	25	21.17	21.12	21.24	22
		50	0	21.27	21.07	21.4	22
	16QAM	1	0	21.69	21.35	21.56	22
		1	25	21.54	21.46	21.47	22
		1	49	21.38	21.11	21.3	22
		25	0	21.23	21.18	21.02	22
		25	13	21.24	20.94	21.19	22
		25	25	21.13	21.13	21.25	22

		50	0	21.23	21.08	21.27	22
	64QAM	1	0	20.76	20.39	20.65	22
		1	25	20.62	20.51	20.50	22
		1	49	20.38	20.20	20.34	22
		25	0	20.23	20.20	20.05	21
		25	13	20.31	19.97	20.28	21
		25	25	20.18	20.20	20.31	21
		50	0	20.30	20.17	20.36	21

LTE Band 12 Receiver off (Body Scene)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23017	23095	23173	
1.4MHz	QPSK	1	0	23.40	23.32	23.32	24
		1	2	22.81	23.03	22.67	24
		1	5	23.50	23.05	23.36	24
		3	0	23.08	22.90	23.16	24
		3	2	22.87	23.03	23.23	24
		3	3	23.35	23.20	23.29	24
		6	0	22.40	21.96	22.17	23
	16QAM	1	0	23.16	22.01	21.90	23
		1	2	22.38	22.07	22.11	23
		1	5	22.36	22.40	22.70	23
		3	0	22.46	22.02	22.35	23
		3	2	21.95	22.03	22.11	23
		3	3	22.32	22.23	22.38	23
		6	0	21.22	21.24	20.70	22
	64QAM	1	0	23.02	21.96	21.76	22
		1	2	22.25	22.01	22.05	22
		1	5	22.22	22.34	22.55	22
		3	0	22.35	21.96	22.28	22
		3	2	21.89	21.90	21.99	22
		3	3	22.20	22.14	22.26	22
		6	0	20.30	20.33	19.70	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23025	23095	23165	
3MHz	QPSK	1	0	23.56	23.17	23.32	24
		1	7	22.92	22.91	22.68	24
		1	14	23.18	23.32	23.67	24
		8	0	22.11	21.81	22.32	23
		8	4	22.40	22.14	22.13	23
		8	7	22.32	22.17	22.16	23
		15	0	22.38	22.07	22.10	23
	16QAM	1	0	22.56	22.31	22.75	23
		1	7	22.34	22.14	23.61	23
		1	14	22.86	22.18	22.75	23
		8	0	21.21	21.03	21.21	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23035	23095	23155		
5MHz	64QAM	8	4	21.35	21.16	21.16	22	
		8	7	21.25	21.05	21.33	22	
		15	0	21.25	20.95	21.32	22	
		1	0	21.63	21.32	21.76	22	
		1	7	21.43	21.23	22.71	22	
		1	14	21.92	21.25	21.79	22	
		8	0	20.25	20.10	20.27	21	
		8	4	20.43	20.16	20.20	21	
		8	7	20.34	20.14	20.36	21	
	15	0	20.29	19.97	20.40	21		
	5MHz	QPSK	1	0	23.46	23.38	23.27	24
			1	13	23.35	23.20	23.10	24
			1	24	23.47	23.27	23.53	24
			12	0	22.37	22.26	22.26	23
			12	6	22.23	22.13	22.12	23
12			13	22.34	22.14	22.38	23	
25			0	22.33	22.09	22.28	23	
16QAM		1	0	22.65	22.66	22.27	23	
		1	13	22.46	21.98	22.67	23	
		1	24	22.73	23.14	22.27	23	
		12	0	21.43	21.15	21.16	22	
		12	6	21.38	21.00	21.07	22	
		12	13	21.31	21.26	21.34	22	
		25	0	21.18	21.16	21.37	22	
64QAM		1	0	21.71	21.69	21.34	22	
		1	13	21.53	21.05	21.70	22	
		1	24	21.76	22.21	21.30	22	
		12	0	20.44	20.17	20.17	21	
		12	6	20.42	20.07	20.08	21	
		12	13	20.40	20.34	20.40	21	
		25	0	20.20	20.19	20.40	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23060	23095	23130		
10MHz	QPSK	1	0	23.02	23.32	23.34	24	
		1	25	22.9	22.91	23.11	24	
		1	49	23.29	23.12	23.05	24	
		25	0	22.26	22.14	22.32	23	
		25	13	22.21	21.97	22.15	23	
		25	25	22.11	22.17	22.23	23	
		50	0	22.24	22	22.25	23	
	16QAM	1	0	22.66	22.38	22.23	23	
		1	25	21.80	22.12	22.51	23	
		1	49	22.63	22.35	22.53	23	
		25	0	21.13	21.16	20.99	22	
		25	13	21.23	21.00	21.15	22	

		25	25	21.19	21.30	21.12	22
		50	0	21.09	20.87	21.17	22
	64QAM	1	0	21.70	21.40	21.31	22
		1	25	20.90	21.14	21.53	22
		1	49	21.71	21.39	21.57	22
		25	0	20.19	20.25	20.06	21
		25	13	20.29	20.07	20.23	21
		25	25	20.23	20.38	20.19	21
		50	0	20.12	19.90	20.26	21

LTE Band 12 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23017	23095	23173	
1.4MHz	QPSK	1	0	18.16	18.20	18.11	19.4
		1	2	17.91	17.89	18.02	19.4
		1	5	18.22	18.31	18.27	19.4
		3	0	18.19	18.21	18.20	19.4
		3	2	18.19	18.04	18.31	19.4
		3	3	18.18	18.29	18.26	19.4
		6	0	18.27	18.07	18.24	19.4
	16QAM	1	0	18.39	18.34	18.25	19.4
		1	2	18.31	17.93	18.54	19.4
		1	5	18.33	18.56	18.52	19.4
		3	0	18.12	18.12	18.12	19.4
		3	2	18.20	18.05	18.17	19.4
		3	3	18.19	18.23	18.17	19.4
		6	0	18.21	17.99	18.22	19.4
	64QAM	1	0	18.31	18.24	18.16	19.4
		1	2	18.25	17.88	18.47	19.4
		1	5	18.27	18.50	18.46	19.4
		3	0	18.04	18.05	18.03	19.4
		3	2	18.14	17.99	18.11	19.4
		3	3	18.13	18.17	18.10	19.4
		6	0	18.14	17.94	18.14	19.4
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	18.26	18.27	18.18	19.4
		1	7	18.00	17.99	18.08	19.4
		1	14	18.31	18.39	18.36	19.4
		8	0	18.26	18.27	18.26	19.4
		8	4	18.28	18.11	18.39	19.4
		8	7	18.27	18.35	18.35	19.4
		15	0	18.36	18.15	18.32	19.4
	16QAM	1	0	18.48	18.42	18.34	19.4
		1	7	18.40	17.99	18.63	19.4
		1	14	18.41	18.63	18.58	19.4

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
				23035	23095	23155			
		8	0	18.19	18.18	18.19	19.4		
		8	4	18.27	18.11	18.26	19.4		
		8	7	18.24	18.31	18.26	19.4		
		15	0	18.30	18.06	18.30	19.4		
	64QAM	1	0	18.42	18.33	18.25	19.4		
		1	7	18.30	17.93	18.54	19.4		
		1	14	18.35	18.53	18.48	19.4		
		8	0	18.10	18.13	18.11	19.4		
		8	4	18.17	18.02	18.19	19.4		
		8	7	18.19	18.24	18.16	19.4		
		15	0	18.23	17.99	18.21	19.4		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
		5MHz	QPSK	1	0	18.32	18.34	18.24	19.4
1	13			18.09	18.07	18.13	19.4		
1	24			18.40	18.48	18.45	19.4		
12	0			18.35	18.35	18.32	19.4		
12	6			18.36	18.19	18.45	19.4		
12	13			18.33	18.45	18.41	19.4		
25	0			18.42	18.24	18.37	19.4		
16QAM	1		0	18.54	18.52	18.40	19.4		
	1		13	18.49	18.05	18.71	19.4		
	1		24	18.50	18.73	18.65	19.4		
	12		0	18.28	18.27	18.25	19.4		
	12		6	18.33	18.16	18.35	19.4		
	12		13	18.31	18.38	18.34	19.4		
	25		0	18.36	18.14	18.35	19.4		
64QAM	1		0	18.48	18.44	18.31	19.4		
	1		13	18.41	17.98	18.65	19.4		
	1		24	18.42	18.64	18.56	19.4		
	12		0	18.20	18.18	18.15	19.4		
	12		6	18.27	18.09	18.28	19.4		
	12		13	18.22	18.31	18.24	19.4		
	25		0	18.29	18.05	18.27	19.4		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up		
10MHz	QPSK	1	0	18.42	18.42	18.32	19.4		
		1	25	18.16	18.12	18.2	19.4		
		1	49	18.46	18.53	18.51	19.4		
		25	0	18.43	18.44	18.41	19.4		
		25	13	18.45	18.29	18.51	19.4		
		25	25	18.42	18.51	18.51	19.4		
		50	0	18.48	18.3	18.47	19.4		
	16QAM	1	0	18.59	18.59	18.46	19.4		
		1	25	18.54	18.14	18.8	19.4		
		1	49	18.55	18.79	18.74	19.4		
		25	0	18.37	18.35	18.34	19.4		
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
						23060	23095	23130	

		25	13	18.41	18.24	18.44	19.4
		25	25	18.37	18.47	18.43	19.4
		50	0	18.42	18.23	18.43	19.4
	64QAM	1	0	18.51	18.54	18.38	19.4
		1	25	18.49	18.08	18.72	19.4
		1	49	18.46	18.74	18.68	19.4
		25	0	18.30	18.28	18.28	19.4
		25	13	18.36	18.19	18.35	19.4
		25	25	18.31	18.41	18.34	19.4
		50	0	18.36	18.17	18.36	19.4

LTE Band 12 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23017	23095	23173	
1.4MHz	QPSK	1	0	17.66	17.63	17.56	19
		1	2	17.42	17.28	17.43	19
		1	5	17.65	17.77	17.77	19
		3	0	17.67	17.69	17.63	19
		3	2	17.72	17.59	17.74	19
		3	3	17.65	17.78	17.79	19
		6	0	17.72	17.59	17.78	19
	16QAM	1	0	18.00	17.97	17.81	19
		1	2	17.52	17.44	17.77	19
		1	5	17.85	18.08	18.07	19
		3	0	17.58	17.64	17.56	19
		3	2	17.62	17.50	17.70	19
		3	3	17.66	17.65	17.71	19
		6	0	17.64	17.55	17.64	19
	64QAM	1	0	17.92	17.91	17.75	19
		1	2	17.44	17.37	17.71	19
		1	5	17.75	17.99	18.01	19
		3	0	17.53	17.57	17.50	19
		3	2	17.53	17.44	17.61	19
		3	3	17.58	17.60	17.61	19
		6	0	17.56	17.49	17.56	19
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	17.74	17.72	17.61	19
		1	7	17.52	17.34	17.51	19
		1	14	17.73	17.84	17.82	19
		8	0	17.73	17.76	17.72	19
		8	4	17.81	17.66	17.83	19
		8	7	17.71	17.84	17.84	19
		15	0	17.77	17.66	17.83	19
	16QAM	1	0	18.06	18.05	17.87	19
		1	7	17.61	17.52	17.84	19
		1	7	17.61	17.52	17.84	19

		1	14	17.92	18.15	18.14	19
		8	0	17.67	17.70	17.66	19
		8	4	17.68	17.58	17.76	19
		8	7	17.71	17.71	17.78	19
		15	0	17.71	17.62	17.70	19
	64QAM	1	0	17.97	17.98	17.82	19
		1	7	17.52	17.45	17.77	19
		1	14	17.84	18.10	18.08	19
		8	0	17.60	17.64	17.57	19
		8	4	17.62	17.49	17.70	19
		8	7	17.61	17.63	17.68	19
15	0	17.63	17.55	17.64	19		
Bandwidth	Modulation	RB size	RB offset	Channel 23035	Channel 23095	Channel 23155	Tune up
5MHz	QPSK	1	0	17.81	17.81	17.69	19
		1	13	17.60	17.39	17.59	19
		1	24	17.83	17.93	17.90	19
		12	0	17.82	17.85	17.80	19
		12	6	17.89	17.72	17.91	19
		12	13	17.76	17.91	17.91	19
		25	0	17.87	17.73	17.90	19
	16QAM	1	0	18.13	18.12	17.94	19
		1	13	17.68	17.58	17.91	19
		1	24	18.00	18.23	18.19	19
		12	0	17.75	17.78	17.75	19
		12	6	17.74	17.65	17.84	19
		12	13	17.77	17.81	17.87	19
		25	0	17.81	17.67	17.80	19
	64QAM	1	0	18.06	18.02	17.86	19
		1	13	17.59	17.48	17.84	19
		1	24	17.92	18.17	18.13	19
		12	0	17.69	17.71	17.69	19
		12	6	17.65	17.56	17.76	19
		12	13	17.71	17.72	17.80	19
		25	0	17.71	17.61	17.75	19
Bandwidth	Modulation	RB size	RB offset	Channel 23060	Channel 23095	Channel 23130	Tune up
10MHz	QPSK	1	0	17.88	17.87	17.77	19
		1	25	17.7	17.46	17.65	19
		1	49	17.89	18	17.98	19
		25	0	17.91	17.9	17.89	19
		25	13	17.95	17.8	17.97	19
		25	25	17.86	17.97	17.97	19
		50	0	17.95	17.82	17.96	19
	16QAM	1	0	18.21	18.21	18.03	19
		1	25	17.73	17.63	18.01	19
		1	49	18.07	18.31	18.24	19

		25	0	17.84	17.83	17.82	19
		25	13	17.83	17.75	17.9	19
		25	25	17.84	17.89	17.94	19
		50	0	17.87	17.75	17.86	19
	64QAM	1	0	18.14	18.13	17.95	19
		1	25	17.68	17.54	17.96	19
		1	49	17.98	18.22	18.17	19
		25	0	17.74	17.75	17.73	19
		25	13	17.77	17.67	17.84	19
		25	25	17.78	17.80	17.87	19
		50	0	17.79	17.67	17.76	19

LTE Band 12 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23017	23095	23173		
1.4MHz	QPSK	1	0	20.38	20.13	20.20	21	
		1	2	19.25	19.96	19.95	21	
		1	5	20.32	20.13	20.34	21	
		3	0	20.21	20.20	20.27	21	
		3	2	20.17	20.06	20.14	21	
		3	3	20.30	20.10	20.22	21	
		6	0	20.29	20.11	19.73	21	
	16QAM	1	0	20.51	20.18	20.44	21	
		1	2	19.73	20.58	20.67	21	
		1	5	20.95	20.41	20.52	21	
		3	0	20.16	20.10	20.31	21	
		3	2	19.74	19.35	20.32	21	
		3	3	20.40	20.04	19.88	21	
		6	0	20.27	19.86	20.15	21	
	64QAM	1	0	20.41	20.11	20.35	21	
		1	2	19.63	20.50	20.57	21	
		1	5	20.88	20.35	20.47	21	
		3	0	20.07	20.04	20.23	21	
		3	2	19.67	19.29	20.24	21	
		3	3	20.33	19.94	19.82	21	
		6	0	20.19	19.79	20.07	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	3MHz	QPSK			23025	23095	23165	
			1	0	20.23	20.29	20.26	21
1			7	19.69	20.00	19.80	21	
1			14	20.39	20.12	20.36	21	
8			0	20.15	20.10	20.23	21	
8			4	20.48	20.13	20.26	21	
8			7	20.43	20.32	20.36	21	
15			0	20.40	19.97	20.21	21	
16QAM			1	0	20.46	20.56	20.53	21

		1	7	20.41	20.05	20.64	21	
		1	14	20.46	20.39	20.66	21	
		8	0	20.32	20.12	20.27	21	
		8	4	20.47	20.06	20.44	21	
		8	7	20.37	20.15	20.25	21	
		15	0	20.20	19.94	20.17	21	
	64QAM	1	0	20.41	20.50	20.44	21	
		1	7	20.34	19.95	20.55	21	
		1	14	20.37	20.29	20.60	21	
		8	0	20.24	20.06	20.21	21	
		8	4	20.41	19.98	20.34	21	
		8	7	20.28	20.06	20.18	21	
		15	0	20.13	19.84	20.11	21	
		Bandwidth	Modulation	RB size	RB offset	Channel 23035	Channel 23095	Channel 23155
5MHz	QPSK	1	0	20.32	20.22	20.25	21	
		1	13	20.33	20.11	20.23	21	
		1	24	20.34	20.42	20.43	21	
		12	0	20.32	20.26	20.27	21	
		12	6	20.32	19.99	20.35	21	
		12	13	20.37	20.24	20.47	21	
		25	0	20.28	20.03	20.32	21	
	16QAM	1	0	20.32	20.50	20.37	21	
		1	13	20.48	20.23	20.43	21	
		1	24	20.61	20.58	20.50	21	
		12	0	20.34	20.03	20.38	21	
		12	6	20.35	20.08	20.25	21	
		12	13	20.27	20.11	20.28	21	
		25	0	20.20	20.01	20.25	21	
	64QAM	1	0	20.22	20.40	20.27	21	
		1	13	20.42	20.16	20.38	21	
		1	24	20.53	20.53	20.40	21	
		12	0	20.27	19.97	20.29	21	
		12	6	20.26	19.99	20.18	21	
		12	13	20.19	20.04	20.22	21	
		25	0	20.13	19.94	20.18	21	
	Bandwidth	Modulation	RB size	RB offset	Channel 23060	Channel 23095	Channel 23130	Tune up
	10MHz	QPSK	1	0	20.31	20.4	20.28	21
			1	25	19.73	19.68	20.23	21
1			49	20.14	20.22	20.17	21	
25			0	20.38	20.27	20.25	21	
25			13	20.34	20.05	20.2	21	
25			25	20.09	20.22	20.17	21	
50			0	20.34	20.1	20.33	21	
16QAM		1	0	20.20	20.17	20.45	21	
		1	25	20.09	19.72	20.27	21	

		1	49	20.27	20.60	20.19	21
		25	0	20.32	20.12	20.06	21
		25	13	20.25	20.02	20.16	21
		25	25	20.06	20.16	20.35	21
		50	0	20.18	20.14	20.06	21
	64QAM	1	0	20.12	20.11	20.35	21
		1	25	20.02	19.64	20.22	21
		1	49	20.21	20.52	20.09	21
		25	0	20.22	20.03	19.98	21
		25	13	20.18	19.93	20.09	21
		25	25	19.99	20.09	20.29	21
		50	0	20.10	20.06	19.98	21

LTE Band 17 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23755	23790	23825	
5MHz	QPSK	1	0	21.87	21.89	21.61	22.3
		1	13	21.73	21.77	21.76	22.3
		1	24	21.69	21.72	21.73	22.3
		12	0	21.74	21.77	21.64	22.3
		12	6	21.83	21.45	21.68	22.3
		12	13	21.68	21.7	21.72	22.3
		25	0	21.66	21.61	21.5	22.3
	16QAM	1	0	22.21	22.04	21.68	22.3
		1	13	22.14	21.69	21.92	22.3
		1	24	22.28	21.64	21.73	22.3
		12	0	21.08	21.09	21.14	22
		12	6	21.06	21.04	21.11	22
		12	13	21.21	21.14	21.11	22
		25	0	21.13	21.01	21.13	22
	64QAM	1	0	22.11	21.97	21.62	22
		1	13	22.07	21.62	21.87	22
		1	24	22.20	21.57	21.66	22
		12	0	20.61	20.67	20.72	21
		12	6	20.61	20.61	20.61	21
		12	13	20.73	20.71	20.71	21
		25	0	20.72	20.55	20.66	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz	QPSK			23780	23790	23800	
		1	0	21.68	21.61	21.48	22.3
		1	25	21.62	21.43	21.81	22.3
		1	49	21.69	21.66	21.87	22.3
		25	0	21.68	21.7	21.51	22.3
		25	13	21.69	21.76	21.66	22.3
		25	25	21.55	21.59	21.6	22.3
		50	0	21.66	21.74	21.61	22.3

	16QAM	1	0	21.71	21.57	21.92	22.3
		1	25	21.8	21.96	21.76	22.3
		1	49	21.88	21.65	22.03	22.3
		25	0	21.09	21.18	21.1	22
		25	13	21.24	20.98	21.19	22
		25	25	21.1	21.19	21.11	22
		50	0	21.1	21.14	21.02	22
	64QAM	1	0	21.62	21.51	21.84	22
		1	25	21.75	21.90	21.70	22
		1	49	21.82	21.57	21.97	22
		25	0	20.60	20.70	20.69	21
		25	13	20.79	20.57	20.70	21
		25	25	20.68	20.73	20.64	21
		50	0	20.65	20.68	20.53	21

LTE Band 17 Receiver on(Right head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23755	23790	23825	
5MHz	QPSK	1	0	20.69	20.75	20.67	21.5
		1	13	20.8	20.67	20.57	21.5
		1	24	20.75	20.73	20.8	21.5
		12	0	20.76	20.7	20.66	21.5
		12	6	20.75	20.67	20.59	21.5
		12	13	20.64	20.74	20.8	21.5
		25	0	20.65	20.82	20.65	21.5
	16QAM	1	0	20.76	20.64	20.58	21.5
		1	13	21.01	20.97	21	21.5
		1	24	20.77	20.74	20.63	21.5
		12	0	20.77	20.81	20.79	21.5
		12	6	20.57	20.71	20.44	21.5
		12	13	20.66	20.63	20.66	21.5
		25	0	20.49	20.39	20.52	21.5
	64QAM	1	0	20.67	20.57	20.53	21.5
		1	13	20.93	20.88	20.90	21.5
		1	24	20.69	20.67	20.55	21.5
		12	0	20.33	20.39	20.36	21
		12	6	20.11	20.26	19.97	21
		12	13	20.20	20.14	20.26	21
		25	0	20.00	19.95	20.07	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz	QPSK	1	0	20.71	20.62	20.63	21.5
		1	25	20.15	20.76	20.11	21.5
		1	49	20.75	20.54	20.77	21.5
		25	0	20.73	20.68	20.57	21.5
		25	13	20.7	20.63	20.54	21.5

		25	25	20.65	20.7	20.63	21.5
		50	0	20.64	20.54	20.72	21.5
	16QAM	1	0	20.55	21	20.36	21.5
		1	25	20.86	20.34	21.05	21.5
		1	49	20.93	20.84	21	21.5
		25	0	20.56	20.58	20.56	21.5
		25	13	20.62	20.48	20.66	21.5
		25	25	20.63	20.59	20.54	21.5
		50	0	20.5	20.53	20.7	21.5
	64QAM	1	0	20.50	20.91	20.30	21.5
		1	25	20.77	20.26	21.00	21.5
		1	49	20.85	20.77	20.91	21.5
		25	0	20.09	20.12	20.08	21
		25	13	20.20	20.07	20.20	21
		25	25	20.14	20.10	20.13	21
		50	0	20.02	20.09	20.29	21

LTE Band 17 Receiver off (Body Scene)				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23755	23790	23825		
5MHz	QPSK	1	0	23.48	23.38	23.28	24	
		1	13	23.27	23.05	23.22	24	
		1	24	23.09	23.18	23.33	24	
		12	0	21.93	22.00	21.92	23	
		12	6	21.94	21.82	21.77	23	
		12	13	21.91	21.93	21.83	23	
		25	0	21.88	21.83	21.98	23	
	16QAM	1	0	22.17	22.54	22.66	23	
		1	13	22.48	22.30	22.31	23	
		1	24	22.16	22.51	22.68	23	
		12	0	21.20	21.24	21.18	22	
		12	6	21.03	21.12	21.07	22	
		12	13	21.19	21.25	21.23	22	
		25	0	20.99	21.07	21.13	22	
	64QAM	1	0	21.19	21.62	21.73	22	
		1	13	21.56	21.32	21.39	22	
		1	24	21.20	21.60	21.76	22	
		12	0	20.22	20.28	20.22	21	
		12	6	20.07	20.15	20.14	21	
		12	13	20.20	20.31	20.23	21	
		25	0	20.01	20.13	20.23	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	10MHz	QPSK	1	0	23.05	23.16	23.08	24
			1	25	23.2	23.45	23.18	24
1			49	22.94	23.04	23.09	24	

		25	0	21.81	21.87	21.69	23
		25	13	21.84	21.9	21.7	23
		25	25	21.84	21.93	21.92	23
		50	0	21.79	21.88	21.76	23
	16QAM	1	0	22.22	22.20	22.12	23
		1	25	21.46	21.95	22.24	23
		1	49	22.48	22.43	22.53	23
		25	0	21.00	21.05	20.96	22
		25	13	20.90	21.05	20.91	22
		25	25	21.08	21.06	21.00	22
		50	0	21.07	20.96	21.08	22
		64QAM	1	0	21.27	21.21	21.12
	1		25	20.52	21.01	21.27	22
	1		49	21.49	21.43	21.55	22
	25		0	20.05	20.12	20.00	21
	25		13	19.92	20.11	19.91	21
	25		25	20.10	20.08	20.01	21
	50		0	20.17	19.98	20.15	21

LTE Band 17 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23755	23790	23825	
5MHz	QPSK	1	0	18.29	18.22	18.33	19.3
		1	13	18.08	18.09	17.88	19.3
		1	24	18.27	18.30	18.30	19.3
		12	0	18.30	18.31	18.30	19.3
		12	6	18.28	18.30	18.29	19.3
		12	13	18.32	18.31	18.31	19.3
		25	0	18.35	18.32	18.29	19.3
	16QAM	1	0	18.61	18.45	18.55	19.3
		1	13	18.47	18.16	18.23	19.3
		1	24	18.64	18.58	18.50	19.3
		12	0	18.17	18.24	18.23	19.3
		12	6	18.27	18.26	18.24	19.3
		12	13	18.26	18.21	18.19	19.3
		25	0	18.23	18.22	18.18	19.3
	64QAM	1	0	18.54	18.40	18.49	19.3
		1	13	18.37	18.07	18.13	19.3
		1	24	18.59	18.49	18.42	19.3
		12	0	18.11	18.18	18.15	19.3
		12	6	18.21	18.20	18.15	19.3
		12	13	18.20	18.12	18.11	19.3
		25	0	18.13	18.14	18.11	19.3
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz	QPSK	1	0	23780	23790	23800	19.3
				18.39	18.29	18.38	

		1	25	18.13	18.15	17.96	19.3	
		1	49	18.37	18.37	18.42	19.3	
		25	0	18.36	18.4	18.37	19.3	
		25	13	18.37	18.4	18.39	19.3	
		25	25	18.39	18.4	18.38	19.3	
		50	0	18.41	18.38	18.37	19.3	
	16QAM	1	0	18.68	18.54	18.63	19.3	
		1	25	18.54	18.23	18.3	19.3	
		1	49	18.71	18.63	18.58	19.3	
		25	0	18.25	18.33	18.3	19.3	
		25	13	18.33	18.32	18.34	19.3	
		25	25	18.32	18.3	18.28	19.3	
	64QAM	50	0	18.29	18.31	18.27	19.3	
		1	0	18.63	18.46	18.58	19.3	
		1	25	18.47	18.18	18.21	19.3	
		1	49	18.64	18.55	18.50	19.3	
		25	0	18.20	18.25	18.21	19.3	
		25	13	18.28	18.26	18.27	19.3	
			25	25	18.23	18.25	18.19	19.3
			50	0	18.23	18.22	18.19	19.3

LTE Band 17 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				23755	23790	23825		
5MHz	QPSK	1	0	17.33	17.22	17.27	18.5	
		1	13	17.14	16.94	17.00	18.5	
		1	24	17.31	17.34	17.35	18.5	
		12	0	17.27	17.32	17.27	18.5	
		12	6	17.35	17.28	17.25	18.5	
		12	13	17.35	17.34	17.30	18.5	
		25	0	17.35	17.31	17.26	18.5	
	16QAM	1	0	17.65	17.49	17.58	18.5	
		1	13	17.23	17.40	17.44	18.5	
		1	24	17.53	17.59	17.66	18.5	
		12	0	17.24	17.24	17.25	18.5	
		12	6	17.24	17.22	17.26	18.5	
		12	13	17.21	17.24	17.29	18.5	
		25	0	17.28	17.27	17.23	18.5	
	64QAM	1	0	17.59	17.43	17.49	18.5	
		1	13	17.15	17.34	17.36	18.5	
		1	24	17.44	17.49	17.59	18.5	
		12	0	17.16	17.19	17.19	18.5	
		12	6	17.16	17.13	17.17	18.5	
		12	13	17.13	17.16	17.22	18.5	
		25	0	17.20	17.17	17.17	18.5	
	Bandwidth	Modulation	RB size	RB	Channel	Channel	Channel	Tune up

			offset	23780	23790	23800	
10MHz	QPSK	1	0	17.42	17.32	17.35	18.5
		1	25	17.21	17	17.07	18.5
		1	49	17.37	17.4	17.44	18.5
		25	0	17.36	17.41	17.34	18.5
		25	13	17.44	17.38	17.33	18.5
		25	25	17.44	17.41	17.36	18.5
		50	0	17.4	17.4	17.36	18.5
	16QAM	1	0	17.71	17.58	17.67	18.5
		1	25	17.3	17.49	17.51	18.5
		1	49	17.63	17.68	17.72	18.5
		25	0	17.31	17.33	17.34	18.5
		25	13	17.3	17.3	17.34	18.5
		25	25	17.31	17.32	17.34	18.5
		50	0	17.35	17.33	17.28	18.5
	64QAM	1	0	17.62	17.52	17.61	18.5
		1	25	17.24	17.42	17.44	18.5
		1	49	17.57	17.62	17.63	18.5
		25	0	17.23	17.27	17.27	18.5
		25	13	17.22	17.25	17.26	18.5
		25	25	17.26	17.23	17.29	18.5
		50	0	17.28	17.26	17.23	18.5

LTE Band 17 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				23755	23790	23825	
5MHz	QPSK	1	0	20.20	20.27	20.20	21
		1	13	20.09	20.30	20.15	21
		1	24	20.24	20.24	20.31	21
		12	0	20.30	20.27	20.19	21
		12	6	19.96	20.18	20.20	21
		12	13	20.21	20.29	20.13	21
		25	0	20.21	20.21	20.11	21
	16QAM	1	0	20.74	20.27	20.19	21
		1	13	20.52	20.66	20.39	21
		1	24	20.27	20.38	20.54	21
		12	0	20.15	20.20	20.11	21
		12	6	20.12	20.20	20.10	21
		12	13	20.12	20.19	20.26	21
		25	0	20.18	20.07	20.05	21
	64QAM	1	0	20.66	20.17	20.11	21
		1	13	20.47	20.61	20.32	21
		1	24	20.18	20.29	20.48	21
		12	0	20.09	20.12	20.02	21
		12	6	20.06	20.14	20.00	21
		12	13	20.03	20.10	20.20	21

Bandwidth	Modulation	25	0	20.10	19.99	19.96	21
		RB size	RB offset	Channel 23780	Channel 23790	Channel 23800	Tune up
10MHz	QPSK	1	0	20.26	20.22	20.38	21
		1	25	20.16	19.57	20.34	21
		1	49	20.16	20.17	20.31	21
		25	0	20.16	20.15	20.24	21
		25	13	20.17	20.19	20.18	21
		25	25	20.14	20.2	20.11	21
		50	0	20.11	20.23	20.09	21
	16QAM	1	0	20.64	20.31	20.51	21
		1	25	20.33	20.34	19.61	21
		1	49	20.54	20.58	20.22	21
		25	0	20.08	20.18	20.08	21
		25	13	20.11	20.30	19.94	21
		25	25	20.17	20.12	20.17	21
		50	0	19.97	20.07	20.12	21
	64QAM	1	0	20.59	20.21	20.41	21
		1	25	20.24	20.28	19.52	21
		1	49	20.47	20.53	20.14	21
		25	0	20.00	20.11	20.00	21
		25	13	20.03	20.21	19.84	21
		25	25	20.12	20.02	20.09	21
		50	0	19.91	20.00	20.06	21

LTE Band 26 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26697	26865	27033	
1.4MHz	QPSK	1	0	20.57	20.54	20.39	21.5
		1	2	20.82	19.48	20.37	21.5
		1	5	20.61	20.5	20.42	21.5
		3	0	20.73	20.55	20.34	21.5
		3	2	20.56	20.48	20.33	21.5
		3	3	20.16	20.4	20.11	21.5
		6	0	20.47	20.18	20.27	21.5
	16QAM	1	0	20.98	20.78	20.67	21.5
		1	2	20.64	20.62	20.42	21.5
		1	5	20.99	20.5	20.14	21.5
		3	0	20.68	20.38	20.36	21.5
		3	2	20.07	20.12	20.32	21.5
		3	3	20.65	19.84	20.4	21.5
		6	0	20.54	20.16	20.18	21.5
	64QAM	1	0	20.93	20.70	20.58	21.5
		1	2	20.55	20.55	20.33	21.5
		1	5	20.91	20.40	20.07	21.5
		3	0	20.59	20.30	20.27	21.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26705	26865	27025	
3MHz	QPSK	3	2	19.99	20.03	20.24	21.5
		3	3	20.59	19.75	20.33	21.5
		6	0	20.11	19.69	19.69	21
		1	0	20.59	20.42	20.35	21.5
		1	7	19.94	19.86	20.79	21.5
		1	14	20.47	20.49	20.43	21.5
		8	0	20.32	20.4	20.29	21.5
	8	4	20.35	20.45	20.41	21.5	
	8	7	20.53	20.13	20.2	21.5	
	15	0	20.63	20.45	20.34	21.5	
	16QAM	1	0	20.84	20.92	20.96	21.5
		1	7	19.35	20.15	20.53	21.5
		1	14	20.81	20.94	20.73	21.5
		8	0	20.46	20.43	20.39	21.5
		8	4	20.63	20.35	20.43	21.5
		8	7	20.48	20.37	20.3	21.5
		15	0	20.65	20.38	20.36	21.5
	64QAM	1	0	20.75	20.82	20.86	21.5
		1	7	19.30	20.05	20.48	21.5
		1	14	20.76	20.84	20.64	21.5
		8	0	20.05	20.01	19.90	21
8		4	20.21	19.93	20.01	21	
8		7	20.06	19.88	19.82	21	
15		0	20.23	19.97	19.89	21	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26715	26865	27015	
5MHz	QPSK	1	0	20.65	20.49	20.47	21.5
		1	13	20.63	20.45	20.52	21.5
		1	24	20.42	20.47	20.43	21.5
		12	0	20.54	20.56	20.36	21.5
		12	6	20.59	20.42	20.38	21.5
		12	13	20.57	20.49	20.43	21.5
		25	0	20.62	20.5	20.37	21.5
	16QAM	1	0	20.7	20.67	20.72	21.5
		1	13	20.5	20.92	20.31	21.5
		1	24	20.96	20.68	20.76	21.5
		12	0	20.61	20.52	20.37	21.5
		12	6	20.53	20.31	20.26	21.5
		12	13	20.6	20.6	20.47	21.5
		25	0	20.45	20.43	20.26	21.5
	64QAM	1	0	20.63	20.62	20.63	21.5
		1	13	20.44	20.82	20.22	21.5
		1	24	20.88	20.61	20.70	21.5
		12	0	20.18	20.02	19.89	21
		12	6	20.08	19.84	19.76	21

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26750	26865	26990	
10MHz	QPSK	12	13	20.15	20.12	20.05	21
		25	0	20.04	19.96	19.77	21
		1	0	20.62	20.57	20.38	21.5
		1	25	20.67	19.87	20.22	21.5
		1	49	20.5	20.56	20.41	21.5
		25	0	20.47	20.53	20.43	21.5
		25	13	20.56	20.5	20.41	21.5
	16QAM	25	25	20.5	20.48	20.47	21.5
		50	0	20.62	20.55	20.47	21.5
		1	0	20.9	20.83	20.69	21.5
		1	25	19.7	20.28	20.07	21.5
		1	49	20.74	20.83	20.2	21.5
		25	0	20.39	20.5	20.38	21.5
		25	13	20.5	20.47	20.49	21.5
	64QAM	25	25	20.44	20.43	20.45	21.5
		50	0	20.44	20.48	20.47	21.5
		1	0	20.82	20.76	20.62	21.5
		1	25	19.60	20.21	19.97	21.5
		1	49	20.65	20.77	20.14	21.5
		25	0	19.98	20.07	19.89	21
		25	13	20.04	19.97	20.06	21
	25	25	20.02	19.99	20.01	21	
	50	0	19.94	20.05	20.05	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
26775					26865	26965	
15MHz	QPSK	1	0	20.48	20.48	20.54	21.5
		1	38	20.44	20.43	20.4	21.5
		1	74	20.47	20.32	20.32	21.5
		36	0	20.6	20.45	20.49	21.5
		36	18	20.63	20.49	20.54	21.5
		36	39	20.5	20.48	20.53	21.5
		75	0	20.58	20.5	20.45	21.5
	16QAM	1	0	20.79	20.69	20.8	21.5
		1	38	20.7	20.93	20.81	21.5
		1	74	20.49	20.6	20.23	21.5
		36	0	20.6	20.47	20.46	21.5
		36	18	20.4	20.54	20.39	21.5
		36	39	20.46	20.4	20.44	21.5
		75	0	20.5	20.39	20.36	21.5
	64QAM	1	0	20.72	20.62	20.73	21.5
		1	38	20.63	20.85	20.74	21.5
		1	74	20.43	20.53	20.17	21.5
		36	0	20.18	20.02	20.05	21
		36	18	19.93	20.11	19.91	21
		36	39	20.01	19.99	20.04	21

		75	0	20.08	19.99	19.95	21
--	--	----	---	-------	-------	-------	----

LTE Band 26 Receiver on(Right head)				Conducted Power(dBm)				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26697	26865	27033		
1.4MHz	QPSK	1	0	20.61	20.52	20.38	21.5	
		1	2	20	20.78	20.21	21.5	
		1	5	20.55	20.41	20.41	21.5	
		3	0	20.53	20.52	20.34	21.5	
		3	2	20.05	20.05	20.02	21.5	
		3	3	20.49	20.43	19.98	21.5	
		6	0	20.31	20.43	20.01	21.5	
	16QAM	1	0	20.92	20.5	20.52	21.5	
		1	2	20.39	20.66	20.6	21.5	
		1	5	20.77	20.24	20.68	21.5	
		3	0	20.76	20.43	20.37	21.5	
		3	2	19.96	20.54	20.36	21.5	
		3	3	20.51	20.06	20.54	21.5	
		6	0	19.7	20.58	20.3	21.5	
	64QAM	1	0	20.84	20.40	20.46	21.5	
		1	2	20.31	20.60	20.51	21.5	
		1	5	20.71	20.17	20.62	21.5	
		3	0	20.68	20.38	20.31	21.5	
		3	2	19.87	20.45	20.31	21.5	
		3	3	20.44	19.98	20.46	21.5	
		6	0	19.28	20.10	19.89	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					26705	26865	27025	
	3MHz	QPSK	1	0	20.54	20.4	20.45	21.5
1			7	20.47	19.93	21.12	21.5	
1			14	20.56	20.45	20.43	21.5	
8			0	20.53	20.48	20.48	21.5	
8			4	20.68	20.47	20.28	21.5	
8			7	20.62	20.3	20.42	21.5	
15			0	20.53	20.43	20.38	21.5	
16QAM		1	0	20.92	20.84	20.39	21.5	
		1	7	19.85	20.56	20.31	21.5	
		1	14	20.41	20.67	20.42	21.5	
		8	0	20.39	20.56	20.39	21.5	
		8	4	20.32	20.39	20.3	21.5	
		8	7	20.58	20.23	20.21	21.5	
		15	0	20.65	20.59	20.49	21.5	
64QAM		1	0	20.83	20.78	20.31	21.5	
		1	7	19.77	20.47	20.25	21.5	
		1	14	20.36	20.58	20.35	21.5	
		8	0	19.98	20.07	19.94	21	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26715	26865	27015		
5MHz	QPSK	8	4	19.91	19.99	19.90	21	
		8	7	20.17	19.82	19.73	21	
		15	0	20.19	20.15	20.05	21	
		1	0	20.51	20.47	20.35	21.5	
		1	13	20.56	20.5	20.53	21.5	
		1	24	20.51	20.48	20.48	21.5	
		12	0	20.61	20.47	20.54	21.5	
	12	6	20.55	20.51	20.31	21.5		
	12	13	20.49	20.54	20.48	21.5		
	25	0	20.58	20.54	20.31	21.5		
	1	0	20.71	21.13	20.79	21.5		
	1	13	21.2	20.92	20.99	21.5		
	1	24	20.92	20.48	20.29	21.5		
	12	0	20.46	20.48	20.32	21.5		
	12	6	20.45	20.42	20.26	21.5		
	12	13	20.65	20.4	20.38	21.5		
	25	0	20.44	20.62	20.34	21.5		
	1	0	20.64	21.07	20.69	21.5		
	1	13	21.15	20.83	20.91	21.5		
	1	24	20.82	20.41	20.20	21.5		
	12	0	20.04	20.01	19.85	21		
	12	6	20.03	19.95	19.76	21		
	12	13	20.15	19.95	19.89	21		
	25	0	20.01	20.18	19.86	21		
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					26750	26865	26990	
	10MHz	QPSK	1	0	20.62	20.57	20.38	21.5
1			25	20.67	19.87	20.22	21.5	
1			49	20.5	20.56	20.41	21.5	
25			0	20.47	20.53	20.43	21.5	
25			13	20.56	20.5	20.41	21.5	
25			25	20.5	20.48	20.47	21.5	
50			0	20.62	20.55	20.47	21.5	
1		0	20.9	20.83	20.69	21.5		
1		25	19.7	20.28	20.07	21.5		
1		49	20.74	20.83	20.2	21.5		
25		0	20.39	20.5	20.38	21.5		
25		13	20.5	20.47	20.49	21.5		
25		25	20.44	20.43	20.45	21.5		
50		0	20.44	20.48	20.47	21.5		
1		0	20.84	20.77	20.61	21.5		
1		25	19.64	20.22	19.98	21.5		
1		49	20.65	20.74	20.11	21.5		
25		0	19.93	20.03	19.92	21		
25		13	20.00	20.02	20.07	21		

Bandwidth	Modulation	25	25	19.94	19.98	19.96	21
		50	0	20.00	20.05	20.02	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26775	26865	26965	
15MHz	QPSK	1	0	20.42	20.55	20.46	21.5
		1	38	20.53	20.36	20.43	21.5
		1	74	20.34	20.35	20.31	21.5
		36	0	20.5	20.56	20.46	21.5
		36	18	20.59	20.57	20.53	21.5
		36	39	20.47	20.45	20.52	21.5
		75	0	20.56	20.48	20.42	21.5
	16QAM	1	0	20.91	20.92	20.66	21.5
		1	38	21.01	20.31	20.74	21.5
		1	74	20.91	20.64	20.67	21.5
		36	0	20.57	20.45	20.38	21.5
		36	18	20.52	20.37	20.31	21.5
		36	39	20.52	20.57	20.31	21.5
		75	0	20.33	20.4	20.35	21.5
	64QAM	1	0	20.85	20.83	20.57	21.5
		1	38	20.93	20.25	20.64	21.5
		1	74	20.85	20.55	20.58	21.5
		36	0	20.11	20.02	19.98	21
		36	18	20.10	19.87	19.88	21
		36	39	20.12	20.12	19.82	21
		75	0	19.83	19.97	19.87	21

LTE Band 26 Receiver off (Body Scene)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26697	26865	27033	
1.4MHz	QPSK	1	0	23.18	23.05	22.94	24
		1	2	22.82	22.84	21.89	24
		1	5	23.15	22.97	22.96	24
		3	0	22.98	22.79	22.62	24
		3	2	22.93	23.03	22.58	24
		3	3	22.87	23.00	22.47	24
		6	0	22.12	21.74	21.90	23
	16QAM	1	0	22.17	22.40	22.15	23
		1	2	21.90	21.63	21.89	23
		1	5	22.22	22.28	22.12	23
		3	0	22.21	21.82	21.78	23
		3	2	21.98	21.77	21.93	23
		3	3	22.20	22.12	22.18	23
		6	0	20.66	20.86	20.74	22
	64QAM	1	0	21.19	21.45	21.20	22
		1	2	20.96	20.65	20.97	22
		1	5	21.28	21.28	21.20	22

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26705	26865	27025	
3MHz	QPSK	3	0	21.24	20.84	20.82	22
		3	2	21.07	20.82	20.97	22
		3	3	21.22	21.16	21.18	22
		6	0	19.67	19.91	19.83	21
		1	0	23.10	22.97	22.93	24
		1	7	23.91	23.20	22.62	24
		1	14	22.96	22.93	22.80	24
	16QAM	8	0	22.05	21.73	21.94	23
		8	4	22.04	21.88	22.00	23
		8	7	21.92	21.95	21.64	23
		15	0	21.95	22.01	21.83	23
		1	0	22.47	22.10	21.90	23
		1	7	22.18	22.30	21.17	23
		1	14	22.52	22.21	21.93	23
	64QAM	8	0	20.98	21.02	21.05	22
		8	4	21.03	21.01	20.61	22
		8	7	21.09	20.72	20.65	22
		15	0	20.93	20.90	20.79	22
		1	0	21.54	21.16	21.00	22
		1	7	21.21	21.34	20.23	22
		1	14	21.61	21.30	20.98	22
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26715	26865	27015	
5MHz	QPSK	1	0	22.96	23.10	23.04	24
		1	13	23.19	23.03	23.04	24
		1	24	23.02	23.02	22.95	24
		12	0	22.12	22.07	21.97	23
		12	6	22.08	21.96	21.91	23
		12	13	22.03	22.01	21.98	23
		25	0	21.99	21.93	21.89	23
	16QAM	1	0	22.30	22.37	22.26	23
		1	13	22.31	21.91	21.86	23
		1	24	22.48	22.34	22.25	23
		12	0	21.08	20.89	20.94	22
		12	6	20.88	20.86	20.80	22
		12	13	21.09	21.05	20.77	22
		25	0	20.97	20.91	20.82	22
	64QAM	1	0	21.39	21.43	21.27	22
		1	13	21.35	21.01	20.95	22
		1	24	21.52	21.40	21.30	22
		12	0	20.16	19.89	19.99	21

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26750	26865	26990		
10MHz	QPSK	12	6	19.97	19.94	19.83	21	
		12	13	20.10	20.06	19.86	21	
		25	0	20.04	19.93	19.84	21	
		1	0	23.11	23.08	23.04	24	
		1	25	22.72	22.49	22.57	24	
		1	49	23.10	22.94	22.95	24	
		25	0	21.98	22.10	21.92	23	
	16QAM	25	13	22.05	21.97	21.99	23	
		25	25	22.09	21.94	21.93	23	
		50	0	22.07	21.99	22.03	23	
		1	0	22.58	22.08	22.03	23	
		1	25	21.78	21.62	21.60	23	
		1	49	22.22	22.48	22.31	23	
		25	0	21.06	20.82	20.80	22	
	64QAM	25	13	21.02	20.87	20.91	22	
		25	25	21.02	20.94	20.84	22	
		50	0	20.94	20.94	20.87	22	
		1	0	21.60	21.12	21.08	22	
		1	25	20.83	20.63	20.66	22	
		1	49	21.22	21.51	21.39	22	
		25	0	20.11	19.90	19.90	21	
	15MHz	QPSK	25	13	20.06	19.92	19.93	21
			25	25	20.03	19.96	19.89	21
			50	0	19.97	19.98	19.88	21
1			0	23.03	22.98	22.98	24	
1			38	23.06	23.17	23.07	24	
1			74	22.94	22.84	22.82	24	
36			0	22.17	22.11	22.09	23	
16QAM		36	18	22.1	21.99	21.93	23	
		36	39	22.06	22.06	22.05	23	
		75	0	22.03	22.06	22	23	
		1	0	22.38	22.33	22.29	23	
		1	38	22.28	22.49	22.30	23	
		1	74	22.29	22.38	22.29	23	
		36	0	20.95	20.97	20.98	22	
64QAM		36	18	21.08	20.91	21.01	22	
		36	39	20.96	20.92	20.95	22	
		75	0	21.02	20.95	20.85	22	
		1	0	21.46	21.36	21.39	22	
		1	38	21.35	21.50	21.37	22	
		1	74	21.38	21.38	21.37	22	
		36	0	19.99	20.05	20.06	21	
		36	18	20.16	19.99	20.07	21	

		36	39	20.00	19.98	20.01	21
		75	0	20.10	19.98	19.87	21

LTE Band 26 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26697	26865	27033	
1.4MHz	QPSK	1	0	16.79	16.74	16.64	18.5
		1	2	16.87	16.77	16.77	18.5
		1	5	16.76	16.67	16.64	18.5
		3	0	16.74	16.80	16.80	18.5
		3	2	16.85	16.85	16.73	18.5
		3	3	16.80	16.78	16.71	18.5
		6	0	16.81	16.73	16.63	18.5
	16QAM	1	0	16.97	17.04	16.88	18.5
		1	2	16.95	16.96	16.98	18.5
		1	5	17.03	17.04	16.83	18.5
		3	0	16.81	16.80	16.74	18.5
		3	2	16.78	16.75	16.71	18.5
		3	3	16.73	16.73	16.74	18.5
		6	0	16.76	16.70	16.65	18.5
	64QAM	1	0	16.92	16.98	16.80	18.5
		1	2	16.86	16.88	16.88	18.5
		1	5	16.97	16.97	16.76	18.5
		3	0	16.71	16.73	16.69	18.5
		3	2	16.71	16.65	16.61	18.5
		3	3	16.67	16.64	16.65	18.5
		6	0	16.68	16.64	16.55	18.5
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
3MHz	QPSK	1	0	16.87	16.82	16.73	18.5
		1	7	16.92	16.84	16.83	18.5
		1	14	16.84	16.77	16.71	18.5
		8	0	16.84	16.89	16.85	18.5
		8	4	16.92	16.93	16.79	18.5
		8	7	16.86	16.88	16.80	18.5
		15	0	16.89	16.82	16.71	18.5
	16QAM	1	0	17.04	17.09	16.97	18.5
		1	7	17.02	17.03	17.05	18.5
		1	14	17.09	17.10	16.90	18.5
		8	0	16.90	16.86	16.79	18.5
		8	4	16.85	16.83	16.76	18.5
		8	7	16.83	16.79	16.83	18.5
		15	0	16.83	16.79	16.74	18.5
	64QAM	1	0	16.97	17.00	16.91	18.5
		1	7	16.93	16.94	16.99	18.5
		1	14	17.04	17.05	16.82	18.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26715	26865	27015		
5MHz	QPSK	8	0	16.83	16.77	16.71	18.5	
		8	4	16.77	16.77	16.67	18.5	
		8	7	16.75	16.69	16.75	18.5	
		15	0	16.76	16.73	16.69	18.5	
		1	0	16.93	16.88	16.81	18.5	
		1	13	16.99	16.94	16.88	18.5	
		1	24	16.92	16.85	16.81	18.5	
	16QAM	12	0	16.93	16.97	16.93	18.5	
		12	6	16.99	16.98	16.86	18.5	
		12	13	16.96	16.97	16.90	18.5	
		25	0	16.97	16.89	16.81	18.5	
		1	0	17.13	17.15	17.04	18.5	
		1	13	17.09	17.09	17.14	18.5	
		1	24	17.15	17.17	16.98	18.5	
	64QAM	12	0	16.95	16.93	16.86	18.5	
		12	6	16.92	16.89	16.83	18.5	
		12	13	16.93	16.87	16.90	18.5	
		25	0	16.88	16.88	16.82	18.5	
		1	0	17.07	17.09	16.98	18.5	
		1	13	17.02	17.01	17.06	18.5	
		1	24	17.09	17.08	16.93	18.5	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					26750	26865	26990	
	10MHz	QPSK	1	0	17.01	16.93	16.88	18.5
			1	25	17.05	16.99	16.96	18.5
			1	49	16.99	16.94	16.90	18.5
			25	0	17.02	17.03	17.00	18.5
			25	13	17.06	17.04	16.93	18.5
25			25	17.04	17.02	16.98	18.5	
50			0	17.02	16.98	16.88	18.5	
16QAM		1	0	17.20	17.21	17.11	18.5	
		1	25	17.16	17.16	17.22	18.5	
		1	49	17.23	17.26	17.03	18.5	
		25	0	17.05	16.99	16.96	18.5	
		25	13	16.99	16.95	16.89	18.5	
		25	25	16.99	16.96	16.96	18.5	
		50	0	16.96	16.93	16.91	18.5	
64QAM		1	0	17.10	17.15	17.03	18.5	
		1	25	17.11	17.10	17.13	18.5	
		1	49	17.14	17.16	16.93	18.5	
		25	0	17.00	16.94	16.86	18.5	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26775	26865	26965	
15MHz		25	13	16.91	16.90	16.80	18.5
		25	25	16.93	16.89	16.91	18.5
		50	0	16.89	16.84	16.86	18.5
	QPSK	1	0	17.1	17.02	16.98	18.5
		1	38	17.12	17.08	17.04	18.5
		1	74	17.07	17.01	16.98	18.5
		36	0	17.11	17.11	17.06	18.5
		36	18	17.14	17.09	16.99	18.5
		36	39	17.11	17.08	17.04	18.5
		75	0	17.1	17.07	16.98	18.5
	16QAM	1	0	17.28	17.29	17.19	18.5
		1	38	17.25	17.25	17.27	18.5
		1	74	17.29	17.31	17.08	18.5
		36	0	17.11	17.04	17.03	18.5
		36	18	17.07	17.03	16.95	18.5
		36	39	17.05	17.05	17.04	18.5
		75	0	17.02	17.01	16.96	18.5
	64QAM	1	0	17.21	17.22	17.13	18.5
		1	38	17.18	17.19	17.20	18.5
		1	74	17.21	17.25	17.01	18.5
		36	0	17.01	16.96	16.97	18.5
		36	18	17.00	16.96	16.85	18.5
		36	39	16.96	16.96	16.97	18.5
		75	0	16.94	16.95	16.90	18.5

LTE Band 26 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26697	26865	27033	
1.4MHz	QPSK	1	0	16.76	16.73	16.72	18.5
		1	2	16.82	16.73	16.72	18.5
		1	5	16.77	16.67	16.71	18.5
		3	0	16.83	16.79	16.78	18.5
		3	2	16.86	16.70	16.74	18.5
		3	3	16.75	16.78	16.71	18.5
		6	0	16.77	16.82	16.68	18.5
	16QAM	1	0	17.03	17.00	16.98	18.5
		1	2	17.04	16.97	16.93	18.5
		1	5	16.91	16.93	16.85	18.5
		3	0	16.80	16.75	16.73	18.5
		3	2	16.73	16.68	16.68	18.5
		3	3	16.74	16.69	16.74	18.5
		6	0	16.79	16.73	16.63	18.5
	64QAM	1	0	16.94	16.91	16.91	18.5
		1	2	16.97	16.90	16.83	18.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26705	26865	27025		
3MHz	QPSK	1	5	16.83	16.84	16.76	18.5	
		3	0	16.72	16.66	16.66	18.5	
		3	2	16.66	16.61	16.61	18.5	
		3	3	16.64	16.64	16.67	18.5	
		6	0	16.70	16.65	16.55	18.5	
		16QAM	1	0	16.82	16.83	16.82	18.5
			1	7	16.89	16.81	16.80	18.5
	1		14	16.83	16.77	16.77	18.5	
	8		0	16.90	16.88	16.87	18.5	
	8		4	16.91	16.79	16.80	18.5	
	8		7	16.81	16.87	16.80	18.5	
	15		0	16.84	16.87	16.74	18.5	
	64QAM		1	0	17.08	17.09	17.06	18.5
		1	7	17.12	17.04	17.00	18.5	
		1	14	16.97	17.02	16.91	18.5	
8		0	16.87	16.82	16.80	18.5		
8		4	16.79	16.77	16.75	18.5		
8		7	16.83	16.78	16.80	18.5		
15		0	16.84	16.79	16.68	18.5		
5MHz	QPSK	1	0	16.91	16.88	16.87	18.5	
		1	13	16.94	16.91	16.87	18.5	
		1	24	16.93	16.86	16.82	18.5	
		12	0	16.96	16.94	16.94	18.5	
		12	6	16.96	16.88	16.89	18.5	
		12	13	16.90	16.92	16.90	18.5	
		25	0	16.91	16.95	16.81	18.5	
	16QAM	1	0	17.14	17.15	17.14	18.5	
		1	13	17.22	17.13	17.08	18.5	
		1	24	17.05	17.07	16.99	18.5	
		12	0	16.95	16.91	16.90	18.5	
		12	6	16.89	16.84	16.84	18.5	
		12	13	16.90	16.86	16.86	18.5	
		25	0	16.91	16.85	16.78	18.5	
	64QAM	1	0	17.09	17.08	17.06	18.5	
1		13	17.15	17.04	17.00	18.5		
1		24	16.97	16.99	16.90	18.5		

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26750	26865	26990		
10MHz	QPSK	12	0	16.87	16.81	16.82	18.5	
		12	6	16.84	16.74	16.75	18.5	
		12	13	16.82	16.80	16.80	18.5	
		25	0	16.85	16.77	16.71	18.5	
		1	0	16.99	16.94	16.93	18.5	
		1	25	17.03	16.97	16.94	18.5	
		1	49	17.00	16.94	16.90	18.5	
	16QAM	25	0	17.05	17.00	16.99	18.5	
		25	13	17.03	16.98	16.95	18.5	
		25	25	16.98	16.98	16.96	18.5	
		50	0	17.01	17.01	16.90	18.5	
		1	0	17.24	17.20	17.20	18.5	
		1	25	17.30	17.20	17.14	18.5	
		1	49	17.11	17.16	17.06	18.5	
	64QAM	25	0	17.05	17.00	16.97	18.5	
		25	13	16.97	16.91	16.92	18.5	
		25	25	16.98	16.94	16.94	18.5	
		50	0	17.01	16.91	16.87	18.5	
		1	0	17.19	17.15	17.13	18.5	
		1	25	17.24	17.13	17.05	18.5	
		1	49	17.05	17.07	16.97	18.5	
	15MHz	QPSK	25	0	16.95	16.92	16.91	18.5
			25	13	16.90	16.83	16.83	18.5
			25	25	16.90	16.88	16.87	18.5
			50	0	16.93	16.85	16.77	18.5
			1	0	17.07	17.02	16.99	18.5
			1	38	17.1	17.05	17.03	18.5
			1	74	17.05	16.99	16.96	18.5
16QAM		36	0	17.13	17.1	17.05	18.5	
		36	18	17.11	17.06	17.03	18.5	
		36	39	17.08	17.07	17.05	18.5	
		75	0	17.1	17.07	16.98	18.5	
		1	0	17.34	17.25	17.27	18.5	
		1	38	17.36	17.26	17.2	18.5	
		1	74	17.17	17.22	17.12	18.5	
64QAM		36	0	17.11	17.05	17.03	18.5	
		36	18	17.04	17	16.97	18.5	
		36	39	17.04	17.02	17.02	18.5	
		75	0	17.07	17	16.96	18.5	
		1	0	17.28	17.17	17.20	18.5	
		1	38	17.29	17.19	17.13	18.5	
		1	74	17.11	17.16	17.04	18.5	
			36	0	17.02	16.98	16.94	18.5

		36	18	16.99	16.94	16.90	18.5
		36	39	16.97	16.94	16.95	18.5
		75	0	17.01	16.94	16.91	18.5

LTE Band 26 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26697	26865	27033	
1.4MHz	QPSK	1	0	20.06	19.96	19.87	21
		1	2	19.88	19.65	19.88	21
		1	5	20.07	19.94	19.87	21
		3	0	19.90	19.82	19.51	21
		3	2	19.87	19.86	19.76	21
		3	3	20.03	19.95	19.69	21
		6	0	20.19	19.86	19.74	21
	16QAM	1	0	20.57	20.15	20.62	21
		1	2	20.00	18.95	19.60	21
		1	5	20.67	20.39	20.15	21
		3	0	20.00	19.88	20.05	21
		3	2	19.88	20.16	19.63	21
		3	3	20.36	19.97	19.98	21
		6	0	19.44	19.79	19.21	21
	64QAM	1	0	20.50	20.06	20.53	21
		1	2	19.94	18.86	19.54	21
		1	5	20.61	20.31	20.05	21
		3	0	19.91	19.82	19.96	21
		3	2	19.80	20.07	19.56	21
		3	3	20.30	19.88	19.92	21
		6	0	19.36	19.71	19.12	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26705	26865	27025	
3MHz	QPSK	1	0	20.07	20.00	19.97	21
		1	7	19.73	19.34	19.50	21
		1	14	19.97	20.10	20.00	21
		8	0	20.11	19.93	19.97	21
		8	4	20.15	19.93	19.87	21
		8	7	19.92	20.03	19.74	21
		15	0	19.95	19.97	19.94	21
	16QAM	1	0	20.39	20.47	20.04	21
		1	7	19.91	19.89	19.44	21
		1	14	20.22	20.64	20.41	21
		8	0	20.01	19.79	20.02	21
		8	4	20.09	19.98	19.95	21
		8	7	20.11	19.66	19.74	21
		15	0	20.17	19.77	19.93	21
	64QAM	1	0	20.32	20.39	19.95	21
		1	7	19.85	19.82	19.39	21

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26715	26865	27015		
5MHz	QPSK	1	0	20.13	20.58	20.31	21	
		8	0	19.94	19.71	19.95	21	
		8	4	20.03	19.93	19.87	21	
		8	7	20.01	19.60	19.68	21	
		15	0	20.11	19.71	19.86	21	
		16QAM	1	0	20.18	20.05	20.05	21
			1	13	20.42	20.54	20.11	21
	1		24	19.97	19.81	20.02	21	
	12		0	20.06	20.07	19.96	21	
	12		6	19.94	19.84	19.80	21	
	12		13	20.11	20.01	19.89	21	
	25		0	19.76	20.00	19.83	21	
	64QAM		1	0	20.09	19.96	19.99	21
		1	13	20.37	20.44	20.05	21	
		1	24	19.89	19.76	19.95	21	
12		0	19.98	20.01	19.90	21		
12		6	19.87	19.76	19.72	21		
12		13	20.05	19.93	19.83	21		
25		0	19.68	19.95	19.78	21		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				26750	26865	26990		
10MHz	QPSK	1	0	20.11	19.98	19.91	21	
		1	25	19.74	19.85	19.98	21	
		1	49	20.07	19.90	19.92	21	
		25	0	19.98	19.93	19.93	21	
		25	13	19.96	20.03	19.78	21	
		25	25	20.02	19.87	19.98	21	
		50	0	20.03	19.94	19.96	21	
	16QAM	1	0	20.71	20.11	20.17	21	
		1	25	20.32	19.53	19.69	21	
		1	49	20.34	20.00	19.72	21	
		25	0	19.94	19.97	19.93	21	
		25	13	19.97	19.95	19.92	21	
		25	25	20.02	19.89	19.89	21	
		50	0	19.90	19.98	19.86	21	
	64QAM	1	0	20.61	20.02	20.09	21	
1		25	20.22	19.44	19.61	21		
1		49	20.27	19.94	19.63	21		

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				26775	26865	26965	
15MHz	QPSK	25	0	19.88	19.90	19.86	21
		25	13	19.91	19.90	19.84	21
		25	25	19.93	19.80	19.82	21
		50	0	19.82	19.89	19.78	21
	QPSK	1	0	19.94	20.05	19.92	21
		1	38	20.03	20.02	19.85	21
		1	74	19.85	19.79	19.92	21
		36	0	20	20.07	19.97	21
		36	18	20.05	20.08	20	21
		36	39	20.03	19.94	19.95	21
		75	0	20.12	19.95	19.95	21
	16QAM	1	0	20.35	20.10	20.08	21
		1	38	20.25	19.80	20.17	21
		1	74	20.03	19.63	20.24	21
		36	0	20.08	20.02	19.91	21
		36	18	20.04	19.89	19.87	21
		36	39	19.93	19.95	20.06	21
		75	0	19.98	19.85	19.86	21
	64QAM	1	0	20.26	20.02	20.00	21
		1	38	20.18	19.71	20.09	21
		1	74	19.95	19.57	20.17	21
		36	0	20.00	19.94	19.82	21
		36	18	19.99	19.81	19.79	21
		36	39	19.83	19.90	19.98	21
		75	0	19.90	19.75	19.77	21

LTE Band 38 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37775	38000	38225	
5MHz	QPSK	1	0	19.18	19.25	19.29	19.8
		1	13	19.29	19.22	19.22	19.8
		1	24	19.09	19.16	19.14	19.8
		12	0	19.14	19.18	19.27	19.8
		12	6	19.26	19.21	19.18	19.8
		12	13	19.24	19.17	19.24	19.8
		25	0	19.11	19.16	19.19	19.8
	16QAM	1	0	19.08	19.14	19.07	19.8
		1	13	19.02	19.14	19.15	19.8
		1	24	19.23	19.17	19.08	19.8
		12	0	19.06	19.1	19.11	19.8
		12	6	19.05	19.1	19.2	19.8
		12	13	19.15	19.14	19.06	19.8
		25	0	19.06	19.21	19.01	19.8
	64QAM	1	0	19.02	19.05	18.97	19.8

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37800	38000	38200	
10MHz	QPSK	1	13	18.94	19.08	19.06	19.8
		1	24	19.15	19.09	19.03	19.8
		12	0	19.01	19.03	19.02	19.8
		12	6	18.95	19.02	19.14	19.8
		12	13	19.07	19.09	18.99	19.8
		25	0	19.01	19.12	18.94	19.8
	16QAM	1	0	19.27	19.18	19.28	19.8
		1	25	19.25	19.24	19.15	19.8
		1	49	19.08	19.2	19.19	19.8
		25	0	19.22	19.15	19.21	19.8
		25	13	19.18	19.17	19.17	19.8
		25	25	19.18	19.14	19.22	19.8
	64QAM	50	0	19.18	19.13	19.15	19.8
		1	0	19.19	18.84	19.14	19.8
		1	25	19.54	19.22	18.42	19.8
		1	49	19.24	19.12	19.16	19.8
		25	0	19.15	19.17	19.07	19.8
		25	13	19	19.09	18.93	19.8
15MHz	QPSK	25	25	19.18	19.05	19.21	19.8
		50	0	19.15	19.07	19.13	19.8
		1	0	19.13	18.77	19.05	19.8
		1	25	19.48	19.17	18.33	19.8
		1	49	19.16	19.06	19.07	19.8
		25	0	19.08	19.07	19.00	19.8
	16QAM	25	13	18.92	19.01	18.87	19.8
		25	25	19.11	18.96	19.11	19.8
		50	0	19.08	19.02	19.05	19.8
		1	0	19.38	18.86	19.14	19.8
		1	38	19.11	18.99	19.24	19.8
		1	74	18.76	19.13	18.82	19.8
	64QAM	36	0	19.3	19.17	19.13	19.8
		36	18	19.2	19.13	19.07	19.8
		36	39	19.2	19.24	19.18	19.8
		75	0	19.16	19.14	19.24	19.8
		36	0	19.14	18.99	19.12	19.8
		36	18	19.06	19.06	19.05	19.8
15MHz	16QAM	36	39	19.11	19.07	19.11	19.8
		75	0	19.08	19.07	19.21	19.8
		1	0	19.30	18.80	19.05	19.8
		1	38	19.02	18.90	19.14	19.8
		1	74	18.76	19.13	18.82	19.8
		36	0	19.14	18.99	19.12	19.8
15MHz	64QAM	36	18	19.06	19.06	19.05	19.8
		36	39	19.11	19.07	19.11	19.8
		75	0	19.08	19.07	19.21	19.8
		1	0	19.30	18.80	19.05	19.8
		1	38	19.02	18.90	19.14	19.8
		1	74	18.76	19.13	18.82	19.8

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37850	38000	38150	
20MHz	QPSK	1	74	18.69	19.06	18.72	19.8
		36	0	19.06	18.91	19.02	19.8
		36	18	18.97	18.97	19.00	19.8
		36	39	19.04	18.98	19.01	19.8
		75	0	19.03	19.01	19.13	19.8
		1	0	19.2	19.2	19.17	19.8
		1	50	18.29	18.68	19.11	19.8
	1	99	19.21	19.23	19.29	19.8	
	50	0	19.17	19.1	19.2	19.8	
	50	25	19.14	19.1	19.2	19.8	
	50	50	19.19	19.15	19.21	19.8	
	100	0	19.13	19.14	19.22	19.8	
	16QAM	1	0	18.9	19.02	19.48	19.8
		1	50	19.21	18.97	19.59	19.8
		1	99	19.32	19.52	19.46	19.8
		50	0	19.18	19.06	19.17	19.8
		50	25	19.11	19	19.17	19.8
		50	50	19.09	19.12	19.16	19.8
		100	0	19.07	19.09	19.13	19.8
	64QAM	1	0	18.81	18.93	19.40	19.8
		1	50	19.15	18.88	19.50	19.8
		1	99	19.24	19.44	19.37	19.8
		50	0	19.10	18.99	19.11	19.8
		50	25	19.03	18.91	19.09	19.8
		50	50	19.01	19.05	19.08	19.8
		100	0	18.99	19.02	19.03	19.8

LTE Band 38 Receiver on(Right head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37775	38000	38225	
5MHz	QPSK	1	0	15.12	15.14	15.21	15.8
		1	13	15.27	15.14	15.17	15.8
		1	24	15.15	15.06	15.2	15.8
		12	0	15.14	15.26	15.13	15.8
		12	6	15.11	15.09	15.18	15.8
		12	13	15.19	15.09	15.12	15.8
		25	0	15.22	15.08	15.16	15.8
	16QAM	1	0	14.78	15.2	15.28	15.8
		1	13	15.42	14.92	15.47	15.8
		1	24	15.33	14.98	15.47	15.8
		12	0	14.96	15.09	15.21	15.8
		12	6	15.06	14.97	15.09	15.8
		12	13	15.15	15.03	15.11	15.8
		25	0	15.11	15.02	15.11	15.8

		1	0	14.70	15.13	15.21	15.8	
		1	13	15.34	14.83	15.37	15.8	
		1	24	15.28	14.88	15.39	15.8	
	64QAM	12	0	14.87	15.01	15.13	15.8	
		12	6	14.98	14.89	15.03	15.8	
		12	13	15.08	14.94	15.04	15.8	
		25	0	15.02	14.94	15.03	15.8	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37800	38000	38200		
10MHz	QPSK	1	0	15.19	15.11	15.18	15.8	
		1	25	15.58	14.88	15.02	15.8	
		1	49	14.98	15.21	15.18	15.8	
		25	0	15.18	15.15	15.22	15.8	
		25	13	15.12	15.04	15.16	15.8	
		25	25	15.26	15.17	15.19	15.8	
		50	0	15.11	15.15	15.17	15.8	
	16QAM	1	0	14.9	14.9	15.57	15.8	
		1	25	14.75	14.9	15.25	15.8	
		1	49	14.8	15.54	15.02	15.8	
		25	0	15.17	14.96	15.18	15.8	
		25	13	15.1	15	15.08	15.8	
		25	25	15.13	15.14	15.13	15.8	
		50	0	15.15	15.1	15.16	15.8	
	64QAM	1	0	14.83	14.82	15.49	15.8	
		1	25	14.67	14.81	15.18	15.8	
		1	49	14.71	15.44	14.96	15.8	
		25	0	15.09	14.89	15.13	15.8	
		25	13	15.04	14.90	15.03	15.8	
		25	25	15.05	15.05	15.06	15.8	
		50	0	15.08	15.02	15.10	15.8	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					37825	38000	38175	
	15MHz	QPSK	1	0	15.18	14.97	15.11	15.8
			1	38	15.13	15.09	15.14	15.8
			1	74	15.07	15.09	15.16	15.8
			36	0	15.17	15.14	15.25	15.8
			36	18	15.08	15.18	15.17	15.8
36			39	15.12	15.21	15.27	15.8	
75			0	15.27	15.19	15.13	15.8	
16QAM		1	0	15.42	14.96	15.15	15.8	
		1	38	15.12	15.3	15.08	15.8	
		1	74	15.09	15.15	15.21	15.8	
		36	0	15.14	15.13	15.07	15.8	
		36	18	15.05	15.15	15.1	15.8	
		36	39	15.03	15.19	15.18	15.8	
		75	0	15.09	14.99	15.06	15.8	
64QAM		1	0	15.36	14.91	15.06	15.8	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37850	38000	38150	
20MHz	QPSK	1	38	15.04	15.21	15.00	15.8
		1	74	15.02	15.09	15.16	15.8
		36	0	15.07	15.04	14.97	15.8
		36	18	15.00	15.06	15.03	15.8
		36	39	14.95	15.13	15.08	15.8
		75	0	15.01	14.92	14.98	15.8
		100	0	15.19	15.21	15.11	15.8
	16QAM	1	0	15.04	15.13	15.21	15.8
		1	50	14.75	15.01	15.09	15.8
		1	99	15.12	15.22	15.03	15.8
		50	0	15.19	15.1	15.06	15.8
		50	25	15.01	15.11	15.09	15.8
		50	50	15.06	15.04	15.11	15.8
		100	0	15.07	15.13	15.13	15.8
	64QAM	1	0	14.97	15.05	15.15	15.8
		1	50	14.68	14.96	15.01	15.8
		1	99	15.04	15.16	14.97	15.8
		50	0	15.12	15.05	15.01	15.8
		50	25	14.96	15.04	15.02	15.8
		50	50	14.97	14.98	15.01	15.8
		100	0	14.99	15.05	15.07	15.8

LTE Band 38 Receiver off (Body Scene)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37775	38000	38225	
5MHz	QPSK	1	0	20.99	21.04	20.94	21.8
		1	13	21.01	20.99	21.04	21.8
		1	24	20.98	21.04	20.95	21.8
		12	0	21.08	21.02	20.95	21.8
		12	6	20.95	20.87	20.81	21.8
		12	13	21.05	20.97	20.95	21.8
		25	0	21.03	20.97	21.06	21.8
	16QAM	1	0	21.10	20.78	20.96	21.8
		1	13	20.88	20.95	21.02	21.8
		1	24	21.24	20.88	20.97	21.8
		12	0	20.95	20.95	20.85	21.8
		12	6	20.92	20.55	20.86	21.8
		12	13	21.02	20.88	20.83	21.8

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37800	38000	38200		
	64QAM	25	0	20.89	20.78	20.84	21.8	
		1	0	21.01	20.70	20.89	21.8	
		1	13	20.80	20.87	20.93	21.8	
		1	24	21.18	20.82	20.89	21.8	
		12	0	20.47	20.50	20.45	21.3	
		12	6	20.43	20.09	20.46	21.3	
		12	13	20.53	20.41	20.38	21.3	
		25	0	20.48	20.36	20.36	21.3	
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
10MHz	QPSK	1	0	20.95	20.94	20.96	21.8	
		1	25	21.18	21.12	21.14	21.8	
		1	49	20.91	20.95	20.99	21.8	
		25	0	21.03	20.94	21.08	21.8	
		25	13	21.01	20.87	20.82	21.8	
		25	25	20.99	20.85	20.97	21.8	
		50	0	21.10	20.87	20.94	21.8	
	16QAM	1	0	21.11	21.00	20.93	21.8	
		1	25	20.90	20.31	21.01	21.8	
		1	49	21.05	20.94	20.86	21.8	
		25	0	20.97	20.87	20.84	21.8	
		25	13	20.83	21.00	20.84	21.8	
		25	25	21.03	20.88	20.75	21.8	
		50	0	20.99	20.81	20.99	21.8	
	64QAM	1	0	21.01	20.92	20.87	21.8	
		1	25	20.82	20.25	20.95	21.8	
		1	49	20.97	20.85	20.78	21.8	
		25	0	20.48	20.39	20.43	21.3	
		25	13	20.42	20.59	20.41	21.3	
		25	25	20.56	20.41	20.31	21.3	
		50	0	20.50	20.34	20.57	21.3	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
	15MHz	QPSK	1	0	20.84	20.86	21.01	21.8
			1	38	20.26	20.98	21.00	21.8
1			74	20.72	20.89	20.89	21.8	
36			0	20.68	20.96	21.06	21.8	
36			18	20.64	21.00	21.07	21.8	
36			39	20.69	20.93	21.10	21.8	
75			0	20.67	21.00	21.05	21.8	
16QAM		1	0	20.68	20.96	20.73	21.8	
		1	38	19.54	21.08	20.72	21.8	
		1	74	20.77	21.21	20.92	21.8	
		36	0	20.60	20.92	20.97	21.8	
		36	18	20.61	20.90	20.92	21.8	
		36	39	20.50	20.84	20.86	21.8	
		75	0	20.62	20.89	20.95	21.8	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37850	38000	38150	
	64QAM	1	0	20.62	20.88	20.65	21.8
		1	38	19.48	20.99	20.67	21.8
		1	74	20.69	21.16	20.83	21.8
		36	0	20.11	20.48	20.56	21.3
		36	18	20.20	20.43	20.50	21.3
		36	39	20.10	20.35	20.39	21.3
		75	0	20.14	20.47	20.46	21.3
20MHz	QPSK	1	0	21.04	20.95	21.03	21.8
		1	50	21.07	20.23	21.06	21.8
		1	99	21.05	21.18	21.08	21.8
		50	0	21.07	21.01	21.02	21.8
		50	25	21.05	20.95	20.99	21.8
		50	50	21.02	21.01	20.97	21.8
		100	0	20.96	20.97	21.05	21.8
	16QAM	1	0	21.01	21.07	20.97	21.8
		1	50	21.21	21.03	20.47	21.8
		1	99	20.82	20.86	20.93	21.8
		50	0	21.12	20.93	20.99	21.8
		50	25	21.10	20.86	20.86	21.8
		50	50	20.91	20.93	20.94	21.8
		100	0	20.94	21.01	20.93	21.8
	64QAM	1	0	20.95	20.97	20.90	21.8
		1	50	21.13	20.97	20.38	21.8
		1	99	20.73	20.76	20.84	21.8
		50	0	20.68	20.48	20.50	21.3
		50	25	20.69	20.40	20.43	21.3
		50	50	20.48	20.49	20.53	21.3
		100	0	20.45	20.57	20.45	21.3

LTE Band 38 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37775	38000	38225	
5MHz	QPSK	1	0	15.90	15.73	15.56	16.8
		1	13	15.31	15.28	15.32	16.8
		1	24	15.73	15.56	15.52	16.8
		12	0	15.83	15.64	15.48	16.8
		12	6	15.65	15.52	15.42	16.8
		12	13	15.67	15.52	15.45	16.8
		25	0	15.74	15.60	15.43	16.8
	16QAM	1	0	16.04	15.77	15.60	16.8
		1	13	15.52	14.95	15.38	16.8
		1	24	15.78	15.50	15.60	16.8
		12	0	15.76	15.48	15.44	16.8
		12	6	15.61	15.45	15.28	16.8

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37800	38000	38200		
10MHz	64QAM	12	13	15.57	15.43	15.37	16.8	
		25	0	15.71	15.53	15.42	16.8	
		1	0	15.96	15.67	15.55	16.8	
		1	13	15.47	14.89	15.32	16.8	
		1	24	15.69	15.44	15.51	16.8	
		12	0	15.67	15.39	15.39	16.8	
		12	6	15.54	15.38	15.23	16.8	
		12	13	15.51	15.35	15.29	16.8	
	25	0	15.62	15.43	15.33	16.8		
	10MHz	QPSK	1	0	15.96	15.82	15.63	16.8
			1	25	15.39	15.38	15.37	16.8
			1	49	15.80	15.66	15.59	16.8
			25	0	15.90	15.70	15.57	16.8
			25	13	15.72	15.59	15.51	16.8
25			25	15.74	15.61	15.51	16.8	
50			0	15.83	15.67	15.52	16.8	
16QAM		1	0	16.10	15.84	15.70	16.8	
		1	25	15.62	15.01	15.45	16.8	
		1	49	15.87	15.58	15.65	16.8	
		25	0	15.85	15.57	15.51	16.8	
		25	13	15.70	15.55	15.38	16.8	
		25	25	15.66	15.51	15.45	16.8	
		50	0	15.81	15.61	15.47	16.8	
64QAM		1	0	16.01	15.77	15.62	16.8	
		1	25	15.56	14.94	15.36	16.8	
		1	49	15.79	15.49	15.57	16.8	
		25	0	15.75	15.48	15.43	16.8	
	25	13	15.62	15.46	15.31	16.8		
	25	25	15.59	15.41	15.36	16.8		
	50	0	15.74	15.51	15.37	16.8		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
15MHz	QPSK	1	0	16.05	15.90	15.71	16.8	
		1	38	15.46	15.47	15.45	16.8	
		1	74	15.89	15.72	15.69	16.8	
		36	0	15.96	15.80	15.63	16.8	
		36	18	15.82	15.67	15.57	16.8	
		36	39	15.81	15.66	15.58	16.8	
		75	0	15.91	15.75	15.58	16.8	
	16QAM	1	0	16.18	15.91	15.79	16.8	
		1	38	15.68	15.10	15.50	16.8	
		1	74	15.94	15.65	15.70	16.8	
		36	0	15.94	15.65	15.58	16.8	
		36	18	15.76	15.62	15.44	16.8	
		36	39	15.73	15.59	15.53	16.8	

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37850	38000	38150		
20MHz	64QAM	75	0	15.88	15.67	15.53	16.8	
		1	0	16.09	15.85	15.72	16.8	
		1	38	15.59	15.01	15.43	16.8	
		1	74	15.88	15.58	15.62	16.8	
		36	0	15.84	15.60	15.51	16.8	
		36	18	15.70	15.56	15.37	16.8	
		36	39	15.68	15.51	15.48	16.8	
		75	0	15.78	15.57	15.45	16.8	
	20MHz	QPSK	1	0	16.13	15.99	15.79	16.8
			1	50	15.56	15.56	15.5	16.8
			1	99	15.97	15.78	15.77	16.8
			50	0	16.03	15.86	15.69	16.8
			50	25	15.88	15.74	15.66	16.8
			50	50	15.9	15.75	15.64	16.8
			100	0	15.98	15.8	15.66	16.8
		16QAM	1	0	16.28	15.97	15.87	16.8
			1	50	15.78	15.16	15.57	16.8
			1	99	16.02	15.73	15.75	16.8
			50	0	16	15.72	15.64	16.8
			50	25	15.84	15.7	15.53	16.8
			50	50	15.83	15.64	15.59	16.8
			100	0	15.94	15.73	15.61	16.8
		64QAM	1	0	16.22	15.91	15.81	16.8
			1	50	15.70	15.07	15.50	16.8
			1	99	15.96	15.67	15.65	16.8
			50	0	15.90	15.65	15.55	16.8
			50	25	15.78	15.60	15.44	16.8
			50	50	15.76	15.57	15.54	16.8
100			0	15.87	15.64	15.52	16.8	

LTE Band 38 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37775	38000	38225	
5MHz	QPSK	1	0	11.92	11.67	11.49	12.8
		1	13	11.49	11.38	11.44	12.8
		1	24	11.69	11.52	11.44	12.8
		12	0	11.85	11.55	11.37	12.8
		12	6	11.71	11.55	11.34	12.8
		12	13	11.67	11.45	11.35	12.8
		25	0	11.70	11.55	11.46	12.8
	16QAM	1	0	11.85	11.73	11.48	12.8
		1	13	11.23	11.10	11.01	12.8
		1	24	11.71	11.41	11.41	12.8
		12	0	11.72	11.52	11.37	12.8

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37800	38000	38200	
	64QAM	12	6	11.63	11.46	11.29	12.8
		12	13	11.59	11.38	11.33	12.8
		25	0	11.67	11.47	11.38	12.8
		1	0	11.75	11.63	11.43	12.8
		1	13	11.17	11.01	10.91	12.8
		1	24	11.63	11.33	11.34	12.8
		12	0	11.63	11.46	11.31	12.8
		12	6	11.57	11.39	11.20	12.8
		12	13	11.54	11.28	11.28	12.8
		25	0	11.60	11.37	11.33	12.8
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
10MHz	QPSK	1	0	11.98	11.73	11.58	12.8
		1	25	11.57	11.46	11.51	12.8
		1	49	11.76	11.57	11.52	12.8
		25	0	11.92	11.63	11.44	12.8
		25	13	11.77	11.61	11.44	12.8
		25	25	11.74	11.51	11.44	12.8
		50	0	11.78	11.64	11.54	12.8
	16QAM	1	0	11.94	11.80	11.57	12.8
		1	25	11.30	11.17	11.10	12.8
		1	49	11.78	11.49	11.48	12.8
		25	0	11.80	11.61	11.44	12.8
		25	13	11.70	11.53	11.37	12.8
		25	25	11.69	11.44	11.39	12.8
		50	0	11.74	11.55	11.45	12.8
	64QAM	1	0	11.86	11.71	11.51	12.8
		1	25	11.21	11.08	11.02	12.8
		1	49	11.69	11.44	11.40	12.8
		25	0	11.74	11.55	11.39	12.8
		25	13	11.63	11.46	11.29	12.8
		25	25	11.62	11.37	11.29	12.8
		50	0	11.65	11.45	11.38	12.8
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
15MHz	QPSK	1	0	12.06	11.82	11.66	12.8
		1	38	11.66	11.52	11.56	12.8
		1	74	11.85	11.64	11.61	12.8
		36	0	11.98	11.70	11.51	12.8
		36	18	11.86	11.66	11.54	12.8
		36	39	11.80	11.60	11.54	12.8
		75	0	11.85	11.72	11.61	12.8
	16QAM	1	0	12.01	11.87	11.67	12.8
		1	38	11.37	11.25	11.16	12.8
		1	74	11.86	11.59	11.57	12.8
		36	0	11.89	11.67	11.52	12.8
		36	18	11.76	11.59	11.46	12.8

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37850	38000	38150		
20MHz	64QAM	36	39	11.75	11.52	11.49	12.8	
		75	0	11.81	11.63	11.52	12.8	
		1	0	11.94	11.80	11.58	12.8	
		1	38	11.29	11.16	11.07	12.8	
		1	74	11.79	11.53	11.48	12.8	
		36	0	11.81	11.57	11.45	12.8	
		36	18	11.70	11.50	11.39	12.8	
		36	39	11.68	11.43	11.39	12.8	
		75	0	11.71	11.55	11.43	12.8	
	QPSK	QPSK	1	0	12.14	11.89	11.74	12.8
			1	50	11.72	11.61	11.66	12.8
			1	99	11.94	11.73	11.69	12.8
			50	0	12.05	11.79	11.61	12.8
			50	25	11.92	11.74	11.61	12.8
			50	50	11.87	11.66	11.63	12.8
			100	0	11.93	11.8	11.67	12.8
		16QAM	1	0	12.06	11.92	11.75	12.8
			1	50	11.42	11.34	11.25	12.8
			1	99	11.91	11.65	11.65	12.8
			50	0	11.98	11.73	11.59	12.8
			50	25	11.84	11.67	11.52	12.8
			50	50	11.83	11.6	11.56	12.8
			100	0	11.87	11.71	11.61	12.8
		64QAM	1	0	11.99	11.85	11.68	12.8
			1	50	11.36	11.28	11.16	12.8
			1	99	11.83	11.55	11.56	12.8
			50	0	11.88	11.65	11.50	12.8
			50	25	11.76	11.57	11.44	12.8
50			50	11.73	11.54	11.48	12.8	
100			0	11.80	11.61	11.56	12.8	

LTE Band 38 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				37775	38000	38225	
5MHz	QPSK	1	0	18.07	17.91	17.92	18.8
		1	13	18.06	17.99	17.99	18.8
		1	24	18.06	17.91	17.95	18.8
		12	0	18.12	17.94	18.02	18.8
		12	6	18.02	17.89	17.88	18.8
		12	13	18.06	17.91	17.97	18.8
		25	0	18.01	17.89	17.97	18.8
	16QAM	1	0	18.05	18.04	18.09	18.8
		1	13	18.07	18.01	18.07	18.8
		1	24	18.02	18.02	18.13	18.8

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up			
				37800	38000	38200				
		12	0	17.96	17.79	17.79	18.8			
		12	6	17.79	17.68	17.75	18.8			
		12	13	17.95	17.75	17.81	18.8			
		25	0	17.92	17.78	17.77	18.8			
	64QAM		1	0	17.97	17.95	18.00	18.8		
			1	13	18.01	17.93	17.98	18.8		
			1	24	17.95	17.92	18.07	18.8		
			12	0	17.89	17.72	17.70	18.8		
			12	6	17.73	17.60	17.65	18.8		
			12	13	17.88	17.67	17.72	18.8		
			25	0	17.83	17.70	17.68	18.8		
			10MHz	QPSK	1	0	18.03	17.91	17.92	18.8
					1	25	17.74	17.49	17.75	18.8
			10MHz	QPSK	1	49	17.92	17.94	17.90	18.8
25	0	18.03			17.94	17.94	18.8			
25	13	18.04			17.93	17.91	18.8			
25	25	17.99			17.88	17.91	18.8			
50	0	18.06			17.90	17.93	18.8			
16QAM	1	0			18.26	18.18	18.07	18.8		
	1	25			17.99	18.06	18.02	18.8		
	1	49		18.19	18.16	18.11	18.8			
	25	0		17.92	17.87	17.86	18.8			
	25	13		17.88	17.81	17.82	18.8			
	25	25		17.89	17.82	17.87	18.8			
	50	0		17.96	17.86	17.86	18.8			
64QAM	1	0		18.19	18.11	17.99	18.8			
	1	25		17.89	17.98	17.92	18.8			
	1	49		18.12	18.09	18.06	18.8			
	25	0		17.84	17.80	17.78	18.8			
	25	13		17.80	17.76	17.77	18.8			
	25	25		17.79	17.73	17.80	18.8			
	50	0	17.87	17.77	17.81	18.8				
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up			
15MHz	QPSK	1	0	18.04	17.93	17.88	18.8			
		1	38	17.97	17.91	17.91	18.8			
		1	74	17.91	17.85	17.89	18.8			
		36	0	18.07	18.00	17.97	18.8			
		36	18	18.00	17.95	17.98	18.8			
		36	39	17.98	17.94	17.95	18.8			
		75	0	18.09	17.87	17.96	18.8			
	16QAM	1	0	18.12	17.86	17.74	18.8			
		1	38	18.08	17.85	17.81	18.8			
		1	74	18.01	17.88	17.77	18.8			
		36	0	18.02	17.83	17.87	18.8			

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				37850	38000	38150		
20MHz	64QAM	36	18	17.96	17.83	17.88	18.8	
		36	39	17.94	17.85	17.92	18.8	
		75	0	17.97	17.84	17.89	18.8	
		1	0	18.06	17.80	17.65	18.8	
		1	38	18.03	17.79	17.75	18.8	
		1	74	17.91	17.80	17.69	18.8	
		36	0	17.92	17.74	17.81	18.8	
		36	18	17.88	17.76	17.81	18.8	
		36	39	17.86	17.77	17.85	18.8	
	75	0	17.88	17.75	17.82	18.8		
	20MHz	QPSK	1	0	18.26	17.97	18.17	18.8
			1	50	17.58	17.56	17.67	18.8
			1	99	18.13	18.08	18.09	18.8
			50	0	18.08	18.02	18.03	18.8
			50	25	17.99	17.94	18.02	18.8
			50	50	18.05	17.95	18	18.8
			100	0	18.04	17.91	17.99	18.8
		16QAM	1	0	18.17	17.99	18.02	18.8
			1	50	17.64	17.68	17.70	18.8
			1	99	18.03	18.00	17.99	18.8
			50	0	18.04	17.90	17.97	18.8
			50	25	17.92	17.82	17.92	18.8
			50	50	17.92	17.89	17.93	18.8
			100	0	17.96	17.86	17.90	18.8
64QAM		1	0	18.08	17.93	17.93	18.8	
		1	50	17.57	17.62	17.61	18.8	
		1	99	17.97	17.93	17.89	18.8	
		50	0	17.94	17.81	17.88	18.8	
		50	25	17.83	17.75	17.83	18.8	
		50	50	17.82	17.80	17.83	18.8	
		100	0	17.86	17.77	17.80	18.8	

LTE Band 41 Receiver on(Left head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40165	40690	41215	
5MHz	QPSK	1	0	19.3	19.14	19.21	20
		1	13	19.25	19.25	19.1	20
		1	24	19.26	19.19	19.25	20
		12	0	19.27	19.19	19.18	20
		12	6	19.08	19.16	19.16	20
		12	13	19.23	19.18	19.23	20
		25	0	19.29	19.1	19.11	20
	16QAM	1	0	19.11	19.25	19.03	20
		1	13	19.18	19.23	19.07	20

		1	24	19.19	19.35	18.94	20
		12	0	19.11	19.1	19.04	20
		12	6	18.95	19.02	18.82	20
		12	13	19.13	19.08	19.15	20
		25	0	19.06	19.16	18.94	20
	64QAM	1	0	19.02	19.16	18.97	20
		1	13	19.09	19.16	19.00	20
		1	24	19.11	19.27	18.87	20
		12	0	19.02	19.02	18.96	20
		12	6	18.88	18.95	18.76	20
		12	13	19.08	19.00	19.08	20
		25	0	18.99	19.07	18.86	20
Bandwidth	Modulation	RB size	RB offset	Channel 40190	Channel 40690	Channel 41190	Tune up
10MHz	QPSK	1	0	19.28	19.18	19.31	20
		1	25	19.36	18.64	18.77	20
		1	49	19.26	19.29	19.26	20
		25	0	19.22	19.23	19.26	20
		25	13	19.23	19.14	19.16	20
		25	25	19.21	19.25	19.11	20
		50	0	19.23	19.19	19.22	20
	16QAM	1	0	19.08	19.13	19.38	20
		1	25	19.21	19.05	18.86	20
		1	49	19.41	19.62	19	20
		25	0	19.07	19.09	19.26	20
		25	13	19.22	19.04	19.09	20
		25	25	19.21	19.2	19.07	20
		50	0	19.21	19.18	19.12	20
	64QAM	1	0	18.99	19.07	19.31	20
		1	25	19.15	18.98	18.80	20
		1	49	19.32	19.53	18.92	20
		25	0	19.00	19.01	19.18	20
		25	13	19.14	18.96	19.01	20
		25	25	19.12	19.15	19.00	20
		50	0	19.12	19.10	19.05	20
Bandwidth	Modulation	RB size	RB offset	Channel 40215	Channel 40690	Channel 41165	Tune up
15MHz	QPSK	1	0	19.33	19.13	19.24	20
		1	38	19.15	19.15	19.12	20
		1	74	19.23	19.21	19.13	20
		36	0	19.29	19.21	19.27	20
		36	18	19.21	19.19	19.28	20
		36	39	19.35	19.27	19.31	20
		75	0	19.33	19.3	19.32	20
	16QAM	1	0	19.41	19.25	18.96	20
		1	38	19.21	19.17	19.14	20
		1	74	19.23	19.37	19.05	20

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				40240	40690	41140		
20MHz	64QAM	36	0	19.22	19.18	19.22	20	
		36	18	19.08	19.16	19.25	20	
		36	39	19.27	19.23	19.13	20	
		75	0	19.21	19.07	19.11	20	
		1	0	19.35	19.16	18.86	20	
		1	38	19.13	19.09	19.04	20	
		1	74	19.13	19.27	18.98	20	
		36	0	19.14	19.12	19.17	20	
		36	18	19.00	19.11	19.16	20	
	36	39	19.20	19.15	19.04	20		
	75	0	19.12	19.01	19.06	20		
	20MHz	QPSK	1	0	19.61	19.38	19.46	20
			1	50	19.05	18.69	18.35	20
			1	99	19.5	19.32	19.45	20
			50	0	19.31	19.29	19.38	20
			50	25	19.24	19.23	19.23	20
			50	50	19.23	19.28	19.31	20
			100	0	19.34	19.31	19.25	20
16QAM		1	0	19.54	19.4	19.57	20	
		1	50	18.91	18.84	19.82	20	
		1	99	19.47	19.56	19.15	20	
		50	0	19.22	19.29	19.3	20	
		50	25	19.19	19.16	19.18	20	
		50	50	19.19	19.24	19.23	20	
64QAM		100	0	19.25	19.3	19.23	20	
		1	0	19.49	19.31	19.49	20	
		1	50	18.81	18.74	19.72	20	
		1	99	19.39	19.49	19.05	20	
		50	0	19.17	19.22	19.21	20	
	50	25	19.13	19.08	19.11	20		
	50	50	19.13	19.14	19.17	20		
100	0	19.19	19.21	19.14	20			

LTE Band 41 Receiver on(Right head)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40165	40690	41215	
5MHz	QPSK	1	0	15.27	15.23	15.2	16
		1	13	15.26	15.27	15.25	16
		1	24	15.14	15.32	15.14	16
		12	0	15.28	15.21	15.06	16
		12	6	15.25	15.2	15.05	16
		12	13	15.16	15.25	15.13	16
		25	0	15.2	15.15	15.01	16
	16QAM	1	0	14.92	15.26	15.27	16

		1	13	14.93	15	15.27	16	
		1	24	14.83	15.07	15.09	16	
		12	0	15.1	15.08	15.02	16	
		12	6	15.22	15.06	15.08	16	
		12	13	15.11	15.05	14.99	16	
		25	0	15.13	15.04	15.05	16	
	64QAM	1	0	14.83	15.17	15.19	16	
		1	13	14.86	14.91	15.20	16	
		1	24	14.74	14.99	15.00	16	
		12	0	15.02	15.02	14.92	16	
		12	6	15.15	14.98	15.01	16	
		12	13	15.02	14.98	14.92	16	
25	0	15.05	14.95	14.96	16			
Bandwidth	Modulation	RB size	RB offset	Channel 40190	Channel 40690	Channel 41190	Tune up	
10MHz	QPSK	1	0	15.23	15.31	15.22	16	
		1	25	15.07	15.28	14.95	16	
		1	49	15.11	15.31	15.14	16	
		25	0	15.19	15.18	15.23	16	
		25	13	15.24	15.13	15.13	16	
		25	25	15.21	15.25	15.19	16	
		50	0	15.19	15.21	15.12	16	
	16QAM	1	0	15.35	15.22	15.36	16	
		1	25	15.16	15.35	14.65	16	
		1	49	15.34	15.05	15.18	16	
		25	0	15.05	15.13	15.12	16	
		25	13	15	15.15	15.08	16	
		25	25	15.15	15.12	15.15	16	
		50	0	15.11	15.11	15.06	16	
	64QAM	1	0	15.25	15.12	15.31	16	
		1	25	15.09	15.29	14.60	16	
		1	49	15.27	14.98	15.12	16	
		25	0	14.95	15.04	15.04	16	
		25	13	14.94	15.08	14.98	16	
		25	25	15.06	15.04	15.10	16	
		50	0	15.02	15.03	14.96	16	
	Bandwidth	Modulation	RB size	RB offset	Channel 40215	Channel 40690	Channel 41165	Tune up
	15MHz	QPSK	1	0	15.33	15.18	15.3	16
			1	38	15.12	15.17	15.26	16
1			74	15.34	15.3	15.14	16	
36			0	15.21	15.27	15.34	16	
36			18	15.1	15.24	15.2	16	
36			39	15.26	15.32	15.22	16	
75			0	15.22	15.22	15.26	16	
16QAM		1	0	15.7	14.94	15.35	16	
		1	38	15.14	15.23	15.21	16	

		1	74	15.71	15	14.93	16
		36	0	15.29	15.13	15.25	16
		36	18	15.11	15.01	15.05	16
		36	39	15.16	15.24	15.09	16
		75	0	15.1	15.23	15.13	16
	64QAM	1	0	15.64	14.87	15.28	16
		1	38	15.04	15.15	15.11	16
		1	74	15.64	14.90	14.84	16
		36	0	15.19	15.04	15.16	16
		36	18	15.04	14.93	14.98	16
		36	39	15.09	15.18	15.00	16
		75	0	15.04	15.15	15.04	16
Bandwidth	Modulation	RB size	RB offset	Channel 40240	Channel 40690	Channel 41140	Tune up
20MHz	QPSK	1	0	15.57	15.59	15.54	16
		1	50	15.16	15.57	14.81	16
		1	99	15.45	15.42	15.39	16
		50	0	15.26	15.36	15.32	16
		50	25	15.26	15.20	15.15	16
		50	50	15.30	15.30	15.21	16
		100	0	15.22	15.32	15.31	16
	16QAM	1	0	15.65	15.37	15.48	16
		1	50	14.74	15.1	14.81	16
		1	99	15.6	15.47	15.17	16
		50	0	15.22	15.09	15.26	16
		50	25	15.17	15.08	15.07	16
		50	50	15.24	15.18	15.13	16
		100	0	15.25	15.2	15.22	16
	64QAM	1	0	15.60	15.31	15.43	16
		1	50	14.67	15.00	14.72	16
		1	99	15.53	15.39	15.09	16
		50	0	15.16	15.04	15.21	16
		50	25	15.08	15.02	15.01	16
		50	50	15.16	15.11	15.05	16
		100	0	15.18	15.12	15.17	16

LTE Band 41 Receiver off (Body Scene)				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 40165	Channel 40690	Channel 41215	Tune up
5MHz	QPSK	1	0	20.62	20.49	20.34	21.5
		1	13	20.55	20.39	20.29	21.5
		1	24	20.53	20.45	20.27	21.5
		12	0	20.71	20.56	20.36	21.5
		12	6	20.48	20.38	20.35	21.5
		12	13	20.59	20.56	20.46	21.5
		25	0	20.53	20.47	20.45	21.5

	16QAM	1	0	20.63	20.73	20.70	21.5	
		1	13	20.60	20.82	20.62	21.5	
		1	24	20.63	20.76	20.66	21.5	
		12	0	20.58	20.49	20.50	21.5	
		12	6	20.51	20.33	20.37	21.5	
		12	13	20.49	20.34	20.24	21.5	
		25	0	20.31	20.41	20.37	21.5	
	64QAM	1	0	20.54	20.65	20.65	21.5	
		1	13	20.54	20.75	20.53	21.5	
		1	24	20.56	20.69	20.60	21.5	
		12	0	20.09	20.01	20.08	21	
		12	6	20.03	19.93	19.95	21	
		12	13	20.06	19.85	19.84	21	
			25	0	19.88	19.93	19.90	21
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				40190	40690	41190		
10MHz	QPSK	1	0	20.61	20.39	20.65	21.5	
		1	25	20.19	20.17	20.22	21.5	
		1	49	20.60	20.52	20.48	21.5	
		25	0	20.54	20.53	20.47	21.5	
		25	13	20.60	20.46	20.25	21.5	
		25	25	20.53	20.43	20.45	21.5	
		50	0	20.56	20.53	20.42	21.5	
	16QAM	1	0	20.73	20.62	20.58	21.5	
		1	25	20.53	20.63	20.68	21.5	
		1	49	20.74	20.71	20.44	21.5	
		25	0	20.55	20.43	20.42	21.5	
		25	13	20.42	20.37	20.28	21.5	
		25	25	20.52	20.35	20.36	21.5	
		50	0	20.46	20.52	20.42	21.5	
	64QAM	1	0	20.65	20.56	20.51	21.5	
		1	25	20.47	20.56	20.60	21.5	
		1	49	20.66	20.65	20.35	21.5	
		25	0	20.13	19.95	19.97	21	
		25	13	19.96	19.97	19.80	21	
		25	25	20.09	19.88	19.93	21	
		50	0	20.04	20.08	19.97	21	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					40215	40690	41165	
	15MHz	QPSK	1	0	20.80	20.53	20.61	21.5
1			38	20.64	20.38	20.52	21.5	
1			74	20.68	20.67	20.43	21.5	
36			0	20.74	20.60	20.58	21.5	
36			18	20.50	20.54	20.38	21.5	
36			39	20.67	20.55	20.45	21.5	
75			0	20.64	20.50	20.44	21.5	
16QAM		1	0	20.91	20.61	20.62	21.5	

		1	38	20.73	20.63	20.42	21.5
		1	74	20.84	20.70	20.62	21.5
		36	0	20.63	20.57	20.44	21.5
		36	18	20.58	20.46	20.48	21.5
		36	39	20.56	20.53	20.43	21.5
		75	0	20.56	20.44	20.52	21.5
	64QAM	1	0	20.84	20.54	20.53	21.5
		1	38	20.67	20.57	20.34	21.5
		1	74	20.79	20.64	20.56	21.5
		36	0	20.18	20.07	19.98	21
		36	18	20.13	20.01	20.00	21
		36	39	20.07	20.12	19.99	21
		75	0	20.07	20.01	20.03	21
		Bandwidth	Modulation	RB size	RB offset	Channel	Channel
				40240	40690	41140	
20MHz	QPSK	1	0	21.01	20.73	20.76	21.5
		1	50	20.60	20.24	20.11	21.5
		1	99	20.83	20.72	20.62	21.5
		50	0	20.67	20.61	20.65	21.5
		50	25	20.58	20.45	20.50	21.5
		50	50	20.65	20.51	20.52	21.5
		100	0	20.67	20.57	20.57	21.5
	16QAM	1	0	21.22	20.82	20.87	21.5
		1	50	20.81	20.38	20.69	21.5
		1	99	21.16	20.90	20.91	21.5
		50	0	20.68	20.57	20.62	21.5
		50	25	20.59	20.39	20.32	21.5
		50	50	20.62	20.43	20.43	21.5
		100	0	20.57	20.53	20.46	21.5
	64QAM	1	0	21.13	20.75	20.79	21.5
		1	50	20.72	20.30	20.61	21.5
		1	99	21.07	20.84	20.82	21.5
		50	0	20.25	20.09	20.15	21
		50	25	20.16	19.98	19.90	21
		50	50	20.15	20.00	20.01	21
		100	0	20.15	20.10	19.99	21

LTE Band 41 Receiver on(Left head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40165	40690	41215	
5MHz	QPSK	1	0	16.11	16.05	15.74	17
		1	13	16.05	15.67	15.58	17
		1	24	16.15	15.82	15.87	17
		12	0	16.33	16.03	15.98	17
		12	6	16.23	15.98	15.97	17
		12	13	16.33	16.01	16.02	17

	16QAM	25	0	16.27	16.00	16.02	17
		1	0	16.10	15.96	15.81	17
		1	13	16.00	15.48	15.49	17
		1	24	16.04	15.78	15.83	17
		12	0	16.26	16.04	15.96	17
		12	6	16.19	15.89	15.88	17
		12	13	16.21	15.93	16.02	17
		25	0	16.29	16.00	16.01	17
	64QAM	1	0	16.02	15.88	15.75	17
		1	13	15.90	15.43	15.40	17
		1	24	15.97	15.71	15.76	17
		12	0	16.17	15.98	15.91	17
		12	6	16.12	15.84	15.82	17
		12	13	16.14	15.87	15.94	17
25	0	16.21	15.92	15.94	17		
Bandwidth	Modulation	RB size	RB offset	Channel 40190	Channel 40690	Channel 41190	Tune up
10MHz	QPSK	1	0	16.18	16.13	15.84	17
		1	25	16.14	15.75	15.66	17
		1	49	16.21	15.87	15.96	17
		25	0	16.40	16.12	16.06	17
		25	13	16.31	16.06	16.04	17
		25	25	16.39	16.10	16.10	17
		50	0	16.36	16.10	16.08	17
	16QAM	1	0	16.16	16.06	15.88	17
		1	25	16.09	15.54	15.56	17
		1	49	16.10	15.85	15.90	17
		25	0	16.35	16.09	16.05	17
		25	13	16.26	15.97	15.95	17
		25	25	16.29	16.00	16.07	17
		50	0	16.35	16.08	16.11	17
	64QAM	1	0	16.07	15.99	15.79	17
		1	25	16.00	15.45	15.47	17
		1	49	16.04	15.78	15.80	17
		25	0	16.26	16.04	15.96	17
		25	13	16.17	15.91	15.86	17
		25	25	16.22	15.92	16.01	17
		50	0	16.28	16.01	16.02	17
Bandwidth	Modulation	RB size	RB offset	Channel 40215	Channel 40690	Channel 41165	Tune up
15MHz	QPSK	1	0	16.26	16.21	15.91	17
		1	38	16.20	15.82	15.75	17
		1	74	16.29	15.96	16.01	17
		36	0	16.47	16.19	16.15	17
		36	18	16.39	16.14	16.12	17
		36	39	16.46	16.18	16.16	17
		75	0	16.44	16.16	16.17	17

	16QAM	1	0	16.21	16.13	15.97	17
		1	38	16.16	15.62	15.64	17
		1	74	16.19	15.93	15.96	17
		36	0	16.40	16.17	16.15	17
		36	18	16.32	16.03	16.03	17
		36	39	16.35	16.09	16.13	17
		75	0	16.41	16.14	16.17	17
	64QAM	1	0	16.12	16.08	15.91	17
		1	38	16.09	15.53	15.56	17
		1	74	16.13	15.87	15.86	17
		36	0	16.32	16.10	16.06	17
		36	18	16.25	15.98	15.98	17
		36	39	16.25	16.01	16.03	17
		75	0	16.31	16.04	16.10	17
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40240	40690	41140	
20MHz	QPSK	1	0	16.31	16.26	15.98	17
		1	50	16.27	15.91	15.83	17
		1	99	16.38	16.02	16.1	17
		50	0	16.53	16.29	16.25	17
		50	25	16.47	16.2	16.19	17
		50	50	16.51	16.27	16.22	17
		100	0	16.49	16.23	16.26	17
	16QAM	1	0	16.29	16.22	16.05	17
		1	50	16.24	15.7	15.72	17
		1	99	16.27	15.98	16.03	17
		50	0	16.46	16.24	16.21	17
		50	25	16.37	16.12	16.11	17
		50	50	16.44	16.18	16.19	17
		100	0	16.51	16.22	16.22	17
	64QAM	1	0	16.20	16.13	15.99	17
		1	50	16.15	15.61	15.62	17
		1	99	16.22	15.88	15.98	17
		50	0	16.38	16.15	16.13	17
		50	25	16.28	16.03	16.03	17
		50	50	16.37	16.11	16.14	17
		100	0	16.44	16.14	16.14	17

LTE Band 41 Receiver on(Right head) +WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40165	40690	41215	
5MHz	QPSK	1	0	12.08	11.90	11.74	13
		1	13	12.21	11.82	11.74	13
		1	24	12.05	11.86	11.87	13
		12	0	12.30	12.07	12.04	13
		12	6	12.23	11.96	11.88	13

		12	13	12.30	11.96	12.02	13	
		25	0	12.30	11.96	12.03	13	
	16QAM	1	0	12.06	12.01	11.77	13	
		1	13	11.86	11.81	11.58	13	
		1	24	12.02	11.91	11.85	13	
		12	0	12.27	11.99	11.96	13	
		12	6	12.11	11.88	11.90	13	
		12	13	12.25	11.91	11.98	13	
		25	0	12.22	12.01	11.93	13	
	64QAM	1	0	12.00	11.95	11.71	13	
		1	13	11.78	11.76	11.52	13	
		1	24	11.93	11.82	11.75	13	
		12	0	12.18	11.90	11.86	13	
		12	6	12.03	11.81	11.80	13	
		12	13	12.18	11.81	11.91	13	
25		0	12.17	11.95	11.84	13		
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up	
				40190	40690	41190		
10MHz	QPSK	1	0	12.15	11.97	11.79	13	
		1	25	12.28	11.89	11.81	13	
		1	49	12.14	11.91	11.92	13	
		25	0	12.40	12.16	12.10	13	
		25	13	12.30	12.03	11.97	13	
		25	25	12.36	12.06	12.11	13	
		50	0	12.37	12.05	12.12	13	
	16QAM	1	0	12.11	12.09	11.83	13	
		1	25	11.95	11.88	11.65	13	
		1	49	12.12	11.98	11.92	13	
		25	0	12.35	12.07	12.06	13	
		25	13	12.17	11.94	11.97	13	
		25	25	12.30	12.00	12.03	13	
		50	0	12.32	12.06	11.98	13	
	64QAM	1	0	12.03	12.00	11.75	13	
		1	25	11.86	11.80	11.56	13	
		1	49	12.03	11.91	11.84	13	
		25	0	12.29	11.99	11.98	13	
		25	13	12.09	11.88	11.89	13	
		25	25	12.21	11.94	11.97	13	
		50	0	12.22	11.97	11.92	13	
	Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
					40215	40690	41165	
	15MHz	QPSK	1	0	12.22	12.06	11.85	13
1			38	12.33	11.96	11.91	13	
1			74	12.22	11.97	11.98	13	
36			0	12.45	12.25	12.17	13	
36			18	12.38	12.11	12.03	13	
36			39	12.42	12.14	12.16	13	

	16QAM	75	0	12.46	12.13	12.18	13
		1	0	12.20	12.17	11.90	13
		1	38	12.00	11.97	11.72	13
		1	74	12.18	12.07	11.97	13
		36	0	12.40	12.15	12.13	13
		36	18	12.27	12.02	12.03	13
		36	39	12.35	12.09	12.10	13
		75	0	12.37	12.13	12.07	13
	64QAM	1	0	12.13	12.07	11.82	13
		1	38	11.93	11.90	11.64	13
		1	74	12.12	12.01	11.90	13
		36	0	12.33	12.06	12.04	13
		36	18	12.21	11.95	11.97	13
		36	39	12.26	12.02	12.01	13
75	0	12.32	12.07	12.00	13		
Bandwidth	Modulation	RB size	RB offset	Channel 40240	Channel 40690	Channel 41140	Tune up
20MHz	QPSK	1	0	12.29	12.15	11.91	13
		1	50	12.39	12.04	11.99	13
		1	99	12.27	12.02	12.07	13
		50	0	12.54	12.3	12.23	13
		50	25	12.44	12.19	12.11	13
		50	50	12.48	12.24	12.24	13
		100	0	12.51	12.23	12.26	13
	16QAM	1	0	12.3	12.22	11.96	13
		1	50	12.09	12.03	11.77	13
		1	99	12.26	12.15	12.03	13
		50	0	12.47	12.21	12.18	13
		50	25	12.35	12.12	12.08	13
		50	50	12.43	12.17	12.15	13
		100	0	12.42	12.2	12.13	13
	64QAM	1	0	12.23	12.14	11.91	13
		1	50	12.02	11.95	11.68	13
		1	99	12.17	12.07	11.95	13
		50	0	12.37	12.14	12.09	13
		50	25	12.27	12.04	12.03	13
		50	50	12.37	12.12	12.09	13
		100	0	12.34	12.12	12.04	13

LTE Band 41 Receiver off (Body Scene)+WiFi on/Hotspot on				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel 40165	Channel 40690	Channel 41215	Tune up
5MHz	QPSK	1	0	17.70	17.53	17.44	18.5
		1	13	17.58	17.48	17.46	18.5
		1	24	17.62	17.51	17.43	18.5
		12	0	17.61	17.47	17.43	18.5

	16QAM	12	6	17.55	17.44	17.29	18.5
		12	13	17.59	17.47	17.38	18.5
		25	0	17.53	17.47	17.36	18.5
		1	0	17.72	17.64	17.64	18.5
		1	13	17.61	17.60	17.61	18.5
		1	24	17.60	17.59	17.61	18.5
		12	0	17.48	17.37	17.30	18.5
		12	6	17.46	17.35	17.15	18.5
		12	13	17.46	17.36	17.28	18.5
	25	0	17.45	17.35	17.25	18.5	
	64QAM	1	0	17.64	17.54	17.59	18.5
		1	13	17.53	17.53	17.51	18.5
		1	24	17.51	17.52	17.55	18.5
		12	0	17.39	17.31	17.21	18.5
		12	6	17.39	17.30	17.08	18.5
12		13	17.40	17.27	17.20	18.5	
25	0	17.36	17.29	17.18	18.5		
Bandwidth	Modulation	RB size	RB offset	Channel 40190	Channel 40690	Channel 41190	Tune up
10MHz	QPSK	1	0	17.60	17.50	17.55	18.5
		1	25	17.08	16.92	17.02	18.5
		1	49	17.60	17.52	17.38	18.5
		25	0	17.61	17.50	17.50	18.5
		25	13	17.53	17.43	17.40	18.5
		25	25	17.54	17.43	17.37	18.5
		50	0	17.56	17.46	17.40	18.5
	16QAM	1	0	17.78	17.57	17.77	18.5
		1	25	17.64	17.56	17.45	18.5
		1	49	17.76	17.57	17.60	18.5
		25	0	17.51	17.41	17.36	18.5
		25	13	17.43	17.34	17.32	18.5
		25	25	17.48	17.39	17.27	18.5
		50	0	17.48	17.40	17.33	18.5
	64QAM	1	0	17.69	17.48	17.72	18.5
		1	25	17.58	17.48	17.39	18.5
		1	49	17.70	17.47	17.54	18.5
		25	0	17.44	17.34	17.29	18.5
		25	13	17.38	17.27	17.22	18.5
		25	25	17.42	17.32	17.19	18.5
		50	0	17.41	17.33	17.25	18.5
Bandwidth	Modulation	RB size	RB offset	Channel 40215	Channel 40690	Channel 41165	Tune up
15MHz	QPSK	1	0	17.68	17.55	17.58	18.5
		1	38	17.59	17.48	17.40	18.5
		1	74	17.62	17.53	17.40	18.5
		36	0	17.67	17.52	17.57	18.5
		36	18	17.62	17.46	17.44	18.5

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel	Tune up
				40240	40690	41140	
20MHz	16QAM	36	39	17.67	17.49	17.49	18.5
		75	0	17.63	17.50	17.49	18.5
		1	0	17.91	17.67	17.76	18.5
		1	38	17.74	17.63	17.64	18.5
		1	74	17.81	17.62	17.61	18.5
		36	0	17.59	17.48	17.50	18.5
		36	18	17.51	17.39	17.36	18.5
		36	39	17.60	17.49	17.41	18.5
		75	0	17.56	17.43	17.41	18.5
		1	0	17.84	17.61	17.71	18.5
		1	38	17.69	17.56	17.57	18.5
		1	74	17.75	17.55	17.54	18.5
		36	0	17.51	17.42	17.43	18.5
		36	18	17.43	17.34	17.29	18.5
	36	39	17.52	17.43	17.36	18.5	
	75	0	17.48	17.35	17.34	18.5	
	64QAM	1	0	18.00	17.89	17.86	18.5
		1	50	16.87	17.09	17.07	18.5
		1	99	17.86	17.86	17.74	18.5
		50	0	17.72	17.62	17.63	18.5
		50	25	17.63	17.51	17.48	18.5
		50	50	17.68	17.58	17.49	18.5
		100	0	17.70	17.63	17.53	18.5
		1	0	18.00	17.76	17.74	18.5
		1	50	17.18	17.10	17.03	18.5
		1	99	17.86	17.82	17.61	18.5
		50	0	17.67	17.55	17.56	18.5
		50	25	17.59	17.42	17.36	18.5
50		50	17.63	17.51	17.42	18.5	
100		0	17.67	17.54	17.48	18.5	
QPSK	1	0	17.90	17.67	17.68	18.5	
	1	50	17.10	17.03	16.94	18.5	
	1	99	17.79	17.72	17.54	18.5	
	50	0	17.58	17.46	17.48	18.5	
	50	25	17.50	17.33	17.29	18.5	
	50	50	17.54	17.42	17.35	18.5	
	100	0	17.59	17.46	17.39	18.5	

Table 16: Conducted Power Of LTE

8.1.3 Conducted Power of Downlink LTE CA

In this section, the following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A.

Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than $\frac{1}{4}$ dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.

Power test equipment: R&S Radio Communication Tester CMW500 and/or Anritsu Radio Communication Analyzer

The device supports Rel. 13 downlink only LTE Carrier Aggregation and certain network enhancement features. It supports a maximum of 4 carriers in the downlink.

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V13.5.0 (2016-09) The detailed conducted power measurement results of downlink LTE CA are provided in the SAR report per 3GPP TS 36.521 V13.3.0 (2016-09). According to KDB 941225 D05A, the downlink only carrier aggregation conditions for this device can be excluded from SAR testing and PAG requirements.

Intra-band contiguous

Initial Conditions									
Test Environment as specified in TS 36.508[7] subclause 4.1					NC, TL/VL, TL/VH, TH/VL, TH/VH				
Test Frequencies as specified in TS 36.508 [7] subclause 4.3.1 for different CA bandwidth classes, and PCC and SCCs are mapped onto physical frequencies according to Table 6.1-2.					C: Mid range				
Test CC Combination setting (N_{RB_agg}) as specified in subclause 5.4.2A.1 for the CA Configuration across bandwidth combination sets supported by the UE.					Lowest N_{RB_agg} Highest N_{RB_agg} (Note 2)				
Test Parameters for CA Configurations									
CA Configuration / N_{RB_agg}		DL Allocation		CC MOD	UL Allocation				
PCC N_{RB}	SCCs N_{RB}	PCC & SCC RB allocation			N_{RB_alloc}	PCC & SCC RB allocations ($L_{CRB} @ RB_{start}$)			
75	75	N/A for this test		QPSK	16	P_16@0	S_0@0	-	-
100	25			QPSK	8	P_8@0	S_0@0	-	-
100	50			QPSK	12	P_12@0	S_0@0	-	-
100	100			QPSK	18	P_18@0	S_0@0	-	-
Note 1: CA Configuration Test CC Combination settings are checked separately for each CA Configuration, which applicable aggregated channel bandwidths are specified in Table 5.4.2A.1-1									
Note 2: If in the CA Configuration UE supports multiple CC Combinations with the same N_{RB_agg} , only the first of those is tested, according to the order on the Test Configuration Table list.									

Inter-band

CA Configuration / N_{RB_agg}		DL Allocation	CC MOD	UL Allocation					
PCC N_{RB}	SCCs N_{RB}	PCC & SCC RB allocation		N_{RB_alloc}	PCC & SCC RB allocations ($L_{CRB} @ RB_{start}$)				
6	25	N/A for this test	QPSK	13	P_5@0	S_8@0	-	-	
6	50		QPSK	17	P_5@0	S_12@0	-	-	
25	15		QPSK	12	P_8@0	S_5@0	-	-	
25	25		QPSK	16	P_8@0	S_8@0	-	-	
25	50		QPSK	20	P_8@0	S_12@0	-	-	
50	25		QPSK	20	P_12@0	S_8@0	-	-	
50	50		QPSK	24	P_12@0	S_12@0	-	-	
50	100		QPSK	30	P_12@0	S_18@0	-	-	
75	75		QPSK	32	P_16@0	S_16@0	-	-	
100	50		QPSK	30	P_18@0	S_12@0	-	-	
100	75		QPSK	34	P_18@0	S_16@0	-	-	
100	100		QPSK	36	P_18@0	S_18@0	-	-	
Note 1: CA Configuration Test CC Combination settings are checked separately for each CA Configuration, which applicable aggregated channel bandwidths are specified in Table 5.4.2A.1-2.									
Note 2: If in the CA Configuration UE supports multiple CC Combinations with the same N_{RB_agg} , only the first of those is tested, according to the order on the Test Configuration Table list.									

The conducted power measurement results of downlink LTE CA Conducted Power are as below, so the downlink only carrier aggregation conditions for this device can be excluded from SAR testing

2CC-Intraband(Contiguous)-ANT1												
Full Power												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	22.98	22.94
Hotspot on+sensor off												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	18.91	18.9
Hotspot on+sensor on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	18.64	18.6
Body Scene(0mm SAR sensor on Level D5)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	20.23	20.23
Body Scene(0mm SAR sensor on Level D1&D4)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	22.08	22.11

2CC-Intraband(Non Contiguous)-ANT1

Full Power												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	1	0	Band 4	20M	2145	2300	23.14	23.14
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2622.5	2775	22.94	22.94
CA_12A-12A	Band 12	5M	701.5	23035	1	0	Band 12	5M	743.5	5155	23.55	23.53
Hotspot on+sensor off												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	1	0	Band 4	20M	2145	2300	17.64	17.68
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2622.5	2775	18.93	18.9
Hotspot on+sensor on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1745	20300	1	0	Band 4	5M	2112.5	1975	15.84	15.86
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2622.5	2775	18.60	18.6
Body Scene(0mm SAR sensor on Level D1&D4&D5)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	50	0	Band 4	20M	2145	2300	21.06	21.09
Body Scene(0mm SAR sensor on Level D5)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2622.5	2775	20.26	20.23
Body Scene(0mm SAR sensor on Level D1&D4)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2622.5	2775	22.09	22.11

2CC Interband-ANT1

Full Power												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channe l	UL # RB	UL RB Offse t	LTE Band	BW (MHz)	Freq. (MHz)	Channe l	LTE Rel 10 Tx.Power(dB m)	LTE Rel 8 Tx.Power(dB m)
CA_2A -4A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	23.14	23.12
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	23.10	23.14
CA_2A -5A	Band 2	20M	1860	18700	1	0	Band 5	20M	874	2450	23.09	23.12
	Band 5	20M	829	20450	1	0	Band 2	20M	1940	700	23.22	23.31
CA_2A -7A	Band 2	20M	1860	18700	1	0	Band 7	20M	2645. 1	3001	23.11	23.12
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	22.94	22.94
CA_2A -12A	Band 2	20M	1860	18700	1	0	Band 12A	5M	743.5	5155	23.14	23.12
	Band 12A	5M	713.5	23155	1	0	Band 2	20M	1940	700	23.55	23.53
CA_2A -12B	Band 2	20M	1860	18700	1	0	Band 12B	10M	741	5130	23.12	23.12
	Band 12B	10M	711	23130	1	49	Band 2	20M	1940	700	23.66	23.62
CA_4A -5A	Band 4	20M	1720	20050	1	0	Band 5	20M	874	2450	23.10	23.14
	Band 5	20M	829	20450	1	0	Band 4	20M	2120	2050	23.29	23.31
CA_4A -7A	Band 4	20M	1720	20050	1	0	Band 7	20M	2645. 1	3001	23.14	23.14
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	22.96	22.94
CA_4A -12A	Band 4	20M	1720	20050	1	0	Band 12A	5M	743.5	5155	23.14	23.14
	Band 4	20M	1720	20050	1	0	Band 12B	10M	741	5130	23.13	23.14
CA_5A -7A	Band 5	20M	829	20450	1	0	Band 7	20M	2645. 1	3001	23.28	23.31
	Band 7	20M	2560	21350	1	99	Band 5	20M	874	2450	22.98	22.94
CA_5A -12A	Band 5	20M	829	20450	1	0	Band 12	10M	741	5130	23.30	23.31
CA_7A -12A	Band 7	20M	2560	21350	1	99	Band 12	10M	741	5130	22.94	22.94
Hotspot on+sensor off												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channe l	UL # RB	UL RB Offse t	LTE Band	BW (MHz)	Freq. (MHz)	Channe l	LTE Rel 10 Tx.Power(dB m)	LTE Rel 8 Tx.Power(dB m)
CA_2A -4A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	18.13	18.11
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	17.72	17.68
CA_2A -7A	Band 2	20M	1860	18700	1	0	Band 7	20M	2645. 1	3001	18.15	18.11
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	18.94	18.9
CA_4A -7A	Band 4	20M	1720	20050	1	0	Band 7	20M	2645. 1	3001	17.66	17.68
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	18.92	18.9
Hotspot on+sensor on												
DL	PCC						SCC				Power	

LTE CA Class	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20M	1860	18700	1	99	Band 4	20M	2145	2300	16.73	16.77
	Band 4	20M	1745	20300	1	0	Band 2	20M	1940	700	15.86	15.86
CA_2A-7A	Band 2	20M	1860	18700	1	99	Band 7	20M	2645.1	3001	16.77	16.77
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	18.62	18.6
CA_4A-7A	Band 4	20M	1745	20300	1	0	Band 7	20M	2645.1	3001	15.90	15.86
	Band 7	20M	2560	21350	1	99	Band 4	20M	2145	2300	18.60	18.6
Scene(0mm SAR sensor on Level D1&D4&D5)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	21.32	21.33
	Band 4	20M	1720	20050	50	0	Band 2	20M	1940	700	21.11	21.09
CA_2A-7A	Band 2	20M	1860	18700	1	0	Band 7	20M	2645.1	3001	21.35	21.33
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	20.24	20.23
CA_4A-7A	Band 4	20M	1720	20050	50	0	Band 7	20M	2645.1	3001	21.08	21.09
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	20.26	20.23

3CC Interband-ANT1

Full Power																
DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MHz)	Freq (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 5	20M	874	2450	23.13	23.12
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	23.10	23.14
	Band 5	20M	829	20450	1	0	Band 4	20M	2120	2050	Band 2	20M	1940	700	23.24	23.31
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	23.12	23.12
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	23.10	23.14
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	22.93	22.94
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 12	10M	734	5060	23.08	23.12
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 12	10M	734	5060	23.16	23.14
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	0	Band 7	20M	2680	3350	Band 12	10M	734	5060	23.11	23.12
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	734	5060	22.95	22.94
CA_4 A-7A- 12A	Band 4	20M	1720	20050	1	0	Band 7	20M	2680	3350	Band 12	10M	734	5060	23.16	23.14
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 12	10M	734	5060	22.92	22.94
Hotspot on+sensor off																
DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MHz)	Freq (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 5	20M	874	2450	18.07	18.11
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	17.69	17.68
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	18.15	18.11
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	17.66	17.68
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	18.90	18.9
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 12	10M	734	5060	18.10	18.11
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 12	10M	734	5060	17.70	17.68
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	0	Band 7	20M	2680	3350	Band 12	10M	734	5060	18.08	18.11
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	734	5060	18.90	18.9
CA_4 A-7A- 12A	Band 4	20M	1720	20050	1	0	Band 7	20M	2680	3350	Band 12	10M	734	5060	17.66	17.68
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 12	10M	734	5060	18.94	18.9
Hotspot on+sensor on																
DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MHz)	Freq (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	99	Band 4	20M	2145	2300	Band 5	20M	874	2450	16.81	16.77
	Band 4	20M	1745	20300	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	15.87	15.86
CA_2 A-4A-	Band 2	20M	1860	18700	1	99	Band 4	20M	2145	2300	Band 7	20M	2680	3350	16.75	16.77

7A	Band 4	20M	1745	20300	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	15.89	15.86
	Band 7	20M	2560	21350	1	99	Band 4	20M	2145	2300	Band 2	20M	1940	700	18.56	18.6
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	99	Band 4	20M	2145	2300	Band 12	10M	734	5060	16.76	16.77
	Band 4	20M	1745	20300	1	0	Band 2	20M	1940	700	Band 12	10M	734	5060	15.90	15.86
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	99	Band 7	20M	2680	3350	Band 12	10M	734	5060	16.76	16.77
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	734	5060	18.56	18.6
CA_4 A-7A- 12A	Band 4	20M	1745	20300	1	0	Band 7	20M	2680	3350	Band 12	10M	734	5060	15.83	15.86
	Band 7	20M	2560	21350	1	99	Band 4	20M	2145	2300	Band 12	10M	734	5060	18.59	18.6

Body Scene(0mm SAR sensor on Level D1&D4&D5)

DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MHz)	Freq (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 5	20M	874	2450	21.31	21.33
	Band 4	20M	1720	20050	50	0	Band 2	20M	1940	700	Band 5	20M	874	2450	21.10	21.09
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	21.37	21.33
	Band 4	20M	1720	20050	50	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	21.10	21.09
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	20.27	20.23
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 12	10M	734	5060	21.30	21.33
	Band 4	20M	1720	20050	50	0	Band 2	20M	1940	700	Band 12	10M	734	5060	21.07	21.09
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	0	Band 7	20M	2680	3350	Band 12	10M	734	5060	21.36	21.33
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	734	5060	20.24	20.23
CA_4 A-7A- 12A	Band 4	20M	1720	20050	50	0	Band 7	20M	2680	3350	Band 12	10M	734	5060	21.07	21.09
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 12	10M	734	5060	20.26	20.23

4CC Interband-ANT1

Full Power																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	1860	18700	1	0	Band 4	20 M	2120	2050	Band 7	20 M	2680	3350	Band 12	10 M	734	5060	23.12	23.12
	Band 4	20 M	1720	20050	1	0	Band 2	20 M	1980	1100	Band 7	20 M	2680	3350	Band 12	10 M	734	5060	23.10	23.14
	Band 7	20 M	2560	21350	1	99	Band 4	20 M	2120	2050	Band 2	20 M	1980	1100	Band 12	10 M	734	5060	22.90	22.94
Hotspot on+sensor off																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	1860	18700	1	0	Band 4	20 M	2120	2050	Band 7	20 M	2680	3350	Band 12	10 M	734	5060	18.11	18.11
	Band 4	20 M	1720	20050	1	0	Band 2	20 M	1940	700	Band 7	20 M	2680	3350	Band 12	10 M	734	5060	17.71	17.68
	Band 7	20 M	2560	21350	1	99	Band 4	20 M	2120	2050	Band 2	20 M	1940	700	Band 12	10 M	734	5060	18.89	18.9
Hotspot on+sensor on																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	1860	18700	1	99	Band 4	20 M	2145	2300	Band 7	20 M	2680	3350	Band 12	10 M	734	5060	16.75	16.77
	Band 4	20 M	1745	20300	1	0	Band 2	20 M	1940	700	Band 7	20 M	2680	3350	Band 12	10 M	734	5060	15.89	15.86
	Band 7	20 M	2560	21350	1	99	Band 4	20 M	2145	2300	Band 2	20 M	1940	700	Band 12	10 M	734	5060	18.60	18.6
Body Scene(0mm SAR sensor on Level D1&D4&D5)																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	1860	18700	1	0	Band 4	20 M	2120	2050	Band 7	20 M	2680	3350	Band 12	10 M	734	5060	21.34	21.33
	Band 4	20 M	1720	20050	1	0	Band 2	20 M	1940	700	Band 7	20 M	2680	3350	Band 12	10 M	734	5060	21.10	21.09
	Band 7	20 M	2560	21350	1	99	Band 4	20 M	2120	2050	Band 2	20 M	1940	700	Band 12	10 M	734	5060	20.20	20.23

2CC-Intraband(Contiguous)-ANT2

Receiver on(Left head)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	15.55	15.51
Receiver on(Right head)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	11.98	11.97
Receiver off (Body Scene)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	19.52	19.5
Receiver on(Left head) +WiFi on/Hotspot on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	14.45	14.49
Receiver on(Right head) +WiFi on/Hotspot on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	50	50	Band 7	20M	2680	3350	10.91	10.95
Receiver off (Body Scene)+WiFi on/Hotspot on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7C	Band 7	20M	2560	21350	1	99	Band 7	20M	2680	3350	18.04	17.99

2CC-Intraband(Non Contiguous)-ANT2

Receiver on(Left head)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	1	0	Band 4	20M	1745	2300	20.22	20.26
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2502.5	2775	15.51	15.51
CA_12A-12A	Band 12	5M	713.5	23155	1	24	Band 12	5M	731.5	5035	21.93	21.91
Receiver on(Right head)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	1	0	Band 4	20M	1745	2300	18.28	18.25
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2502.5	2775	11.98	11.97
CA_12A-12A	Band 12	5M	701.5	23035	1	13	Band 12	5M	743.5	5155	21.46	21.5
Receiver off (Body Scene)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	1	99	Band 4	20M	1745	2300	22.8	22.77
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2502.5	2775	19.5	19.5
CA_12A-12A	Band 12	5M	713.5	23155	1	24	Band 12	5M	731.5	5035	23.44	23.53
Receiver on(Left head) +WiFi on/Hotspot on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	1	0	Band 4	20M	1745	2300	17.2	17.2
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2502.5	2775	14.47	14.49
CA_12A-12A	Band 12	5M	713.5	23155	12	13	Band 12	5M	731.5	5035	20.44	20.47
Receiver on(Right head) +WiFi on/Hotspot on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	1	0	Band 4	20M	1745	2300	15.04	15.04
CA_7A-7A	Band 7	20M	2560	21350	50	50	Band 7	5M	2502.5	2775	10.95	10.95
CA_12A-12A	Band 12	5M	713.5	23155	12	13	Band 12	5M	731.5	5035	20.44	20.47
Receiver off (Body Scene)+WiFi on/Hotspot on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1720	20050	1	0	Band 4	20M	1745	2300	19.74	19.74
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	5M	2502.5	2775	17.97	17.99
CA_12A-12A	Band 12	5M	713.5	23155	12	13	Band 12	5M	731.5	5035	20.44	20.47

2CC Interband-ANT2

Receiver on(Left head)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	18.61	18.57
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	20.29	20.26
CA_2A-5A	Band 2	20M	1860	18700	1	0	Band 5	10M	874	2450	18.60	18.57
	Band 5	10M	829	20450	1	0	Band 2	20M	1940	700	21.08	21.08
CA_2A-7A	Band 2	20M	1860	18700	1	0	Band 7	20M	2645.1	3001	18.59	18.57
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	15.51	15.51
CA_2A-12A	Band 2	20M	1860	18700	1	0	Band 12A	5M	743.5	5155	18.56	18.57
	Band 12A	5M	713.5	23155	1	24	Band 2	20M	1940	700	21.90	21.91
CA_2A-12B	Band 2	20M	1860	18700	1	0	Band 12B	10M	741	5130	18.55	18.57
	Band 12B	10M	711	23130	1	49	Band 2	20M	1940	700	22.01	21.97
CA_4A-5A	Band 4	20M	1720	20050	1	0	Band 5	10M	874	2450	20.27	20.26
	Band 5	10M	829	20450	1	0	Band 4	20M	2120	2050	21.07	21.08
CA_4A-7A	Band 4	20M	1720	20050	1	0	Band 7	20M	2645.1	3001	20.25	20.26
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	15.53	15.51
CA_4A-12A	Band 4	20M	1720	20050	1	0	Band 12A	5M	743.5	5155	20.22	20.26
CA_4A-12B	Band 4	20M	1720	20050	1	0	Band 12B	10M	741	5130	20.24	20.26
CA_5A-7A	Band 5	10M	829	20450	1	0	Band 7	20M	2645.1	3001	21.08	21.08
	Band 7	20M	2560	21350	1	99	Band 5	10M	874	2450	15.54	15.51
CA_5A-12A	Band 5	10M	829	20450	1	0	Band 12	10M	741	5130	21.07	21.08
CA_7A-12A	Band 7	20M	2560	21350	1	99	Band 12	10M	741	5130	15.51	15.51
Receiver on(Right head)												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	17.06	17.08
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	18.24	18.25
CA_2A-5A	Band 2	20M	1860	18700	1	0	Band 5	10M	874	2450	17.11	17.08
	Band 5	10M	829	20450	1	0	Band 2	20M	1940	700	20.59	20.59
CA_2A-7A	Band 2	20M	1860	18700	1	0	Band 7	20M	2645.1	3001	17.06	17.08
	Band 7	20M	2560	21350	1	99	Band 2	20M	2680	3350	11.97	11.97
CA_2A-12A	Band 2	20M	1860	18700	1	0	Band 12A	5M	2680	3350	17.11	17.08
	Band 12A	5M	701.5	23035	1	13	Band 2	20M	1940	700	21.46	21.5

CA_2A-12B	Band 2	20M	1860	18700	1	0	Band 12B	10M	741	5130	17.11	17.08
	Band 12B	10M	711	23130	1	49	Band 2	20M	1940	700	21.42	21.4
CA_4A-5A	Band 4	20M	1720	20050	1	0	Band 5	10M	874	2450	18.29	18.25
	Band 5	10M	829	20450	1	0	Band 4	20M	2120	2050	20.56	20.59
CA_4A-7A	Band 4	20M	1720	20050	1	0	Band 7	20M	2645.1	3001	18.29	18.25
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	11.94	11.97
CA_4A-12A	Band 4	20M	1720	20050	1	0	Band 12A	5M	731.5	5035	18.29	18.25
CA_4A-12B	Band 4	20M	1720	20050	1	0	Band 12B	10M	741	5130	18.26	18.25
CA_5A-7A	Band 5	10M	829	20450	1	0	Band 7	20M	2645.1	3001	20.57	20.59
	Band 7	20M	2560	21350	1	99	Band 5	10M	874	2450	12.00	11.97
CA_5A-12A	Band 5	10M	829	20450	1	0	Band 12	10M	741	5130	20.63	20.59
CA_7A-12A	Band 7	20M	2560	21350	1	99	Band 12	10M	741	5130	11.94	11.97

Receiver off (Body Scene)

DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	22.14	22.1
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	22.77	22.77
CA_2A-5A	Band 2	20M	1860	18700	1	0	Band 5	10M	874	2450	22.06	22.1
	Band 5	10M	829	20450	1	0	Band 2	20M	1940	700	23.13	23.14
CA_2A-7A	Band 2	20M	1860	18700	1	0	Band 7	20M	2645.1	3001	22.08	22.1
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	19.50	19.5
CA_2A-12A	Band 2	20M	1860	18700	1	0	Band 12A	5M	743.5	5155	22.13	22.1
	Band 12A	5M	713.5	23155	1	24	Band 2	20M	1940	700	23.51	23.53
CA_2A-12B	Band 2	20M	1860	18700	1	0	Band 12B	10M	741	5130	22.14	22.1
	Band 12B	10M	711	23130	1	0	Band 2	20M	1940	700	23.37	23.34
CA_4A-5A	Band 4	20M	1720	20050	1	0	Band 5	10M	874	2450	22.74	22.77
	Band 5	10M	829	20450	1	0	Band 4	20M	2120	2050	23.10	23.14
CA_4A-7A	Band 4	20M	1720	20050	1	0	Band 7	20M	2645.1	3001	22.81	22.77
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	19.54	19.5
CA_4A-12A	Band 4	20M	1720	20050	1	0	Band 12A	5M	743.5	5155	22.80	22.77
CA_4A-12B	Band 4	20M	1720	20050	1	0	Band 12B	10M	741	5130	22.80	22.77
CA_5A-7A	Band 5	10M	829	20450	1	0	Band 7	20M	2645.1	3001	23.10	23.14
	Band 7	20M	2560	21350	1	99	Band 5	10M	874	2450	19.52	19.5
CA_5A-12A	Band 5	10M	829	20450	1	0	Band 12	10M	741	5130	23.12	23.14
CA_7A-12A	Band 7	20M	2560	21350	1	99	Band 12	10M	741	5130	19.48	19.5

Receiver on(Left head) +WiFi on/Hotspot on

DL LTE	PCC						SCC				Power	
--------	-----	--	--	--	--	--	-----	--	--	--	-------	--

CA Class	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20M	1860	18700	1	50	Band 4	20M	2120	2050	15.93	15.92
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	17.17	17.2
CA_2A-5A	Band 2	20M	1860	18700	1	50	Band 5	10M	874	2450	15.90	15.92
	Band 5	10M	829	20450	25	0	Band 2	20M	1940	700	17.60	17.64
CA_2A-7A	Band 2	20M	1860	18700	1	50	Band 7	20M	2645.1	3001	15.93	15.92
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	14.51	14.49
CA_2A-12A	Band 2	20M	1860	18700	1	50	Band 12A	5M	743.5	5155	15.95	15.92
	Band 12A	5M	713.5	23155	1	24	Band 2	20M	1940	700	18.48	18.45
CA_2A-12B	Band 2	20M	1860	18700	1	50	Band 12B	10M	741	5130	15.95	15.92
	Band 12B	10M	711	23130	25	13	Band 2	20M	1940	700	18.49	18.51
CA_4A-5A	Band 4	20M	1720	20050	1	0	Band 5	10M	874	2450	17.24	17.2
	Band 5	10M	829	20450	25	0	Band 4	20M	2120	2050	17.66	17.64
CA_4A-7A	Band 4	20M	1720	20050	1	0	Band 7	20M	2645.1	3001	17.18	17.2
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	14.51	14.49
CA_4A-12A	Band 4	20M	1720	20050	1	0	Band 12A	5M	743.5	5155	17.17	17.2
CA_4A-12B	Band 4	20M	1720	20050	1	0	Band 12B	10M	741	5130	17.19	17.2
CA_5A-7A	Band 5	10M	829	20450	25	0	Band 7	20M	2645.1	3001	17.66	17.64
	Band 7	20M	2560	21350	1	99	Band 5	10M	874	2450	14.52	14.49
CA_5A-12A	Band 5	10M	829	20450	25	0	Band 12	10M	741	5130	17.64	17.64
CA_7A-12A	Band 7	20M	2560	21350	1	99	Band 12	10M	741	5130	14.53	14.49

Receiver on(Right head) +WiFi on/Hotspot on

DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	14.30	14.34
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	15.01	15.04
CA_2A-5A	Band 2	20M	1860	18700	1	0	Band 5	10M	874	2450	14.36	14.34
	Band 5	10M	829	20450	25	13	Band 2	20M	1940	700	17.12	17.12
CA_2A-7A	Band 2	20M	1860	18700	1	0	Band 7	20M	2645.1	3001	14.36	14.34
	Band 7	20M	2560	21350	50	50	Band 2	20M	1940	700	10.94	10.95
CA_2A-12A	Band 2	20M	1860	18700	1	0	Band 12A	5M	743.5	5155	14.37	14.34
	Band 12A	5M	713.5	23155	12	13	Band 2	20M	1940	700	17.94	17.91
CA_2A-12B	Band 2	20M	1860	18700	1	0	Band 12B	10M	741	5130	14.33	14.34
	Band 12B	10M	711	23130	1	49	Band 2	20M	1940	700	17.96	17.98
CA_4A-5A	Band 4	20M	1720	20050	1	0	Band 5	10M	874	2450	15.05	15.04
	Band 5	10M	829	20450	1	0	Band 4	20M	2120	2050	17.14	17.12

CA_4A-7A	Band 4	20M	1720	20050	1	0	Band 7	20M	2645.1	3001	15.01	15.04
	Band 7	20M	2560	21350	50	50	Band 4	20M	2120	2050	10.92	10.95
CA_4A-12A	Band 4	20M	1720	20050	1	0	Band 12A	5M	743.5	5155	15.00	15.04
CA_4A-12B	Band 4	20M	1720	20050	1	0	Band 12B	10M	741	5130	15.01	15.04
CA_5A-7A	Band 5	10M	829	20450	1	0	Band 7	20M	2645.1	3001	17.11	17.12
	Band 7	20M	2560	21350	50	50	Band 5	10M	874	2450	10.96	10.95
CA_5A-12A	Band 5	10M	829	20450	1	0	Band 12	10M	741	5130	17.14	17.12
CA_7A-12A	Band 7	20M	2560	21350	50	50	Band 12	10M	741	5130	10.93	10.95
Receiver off (Body Scene)+WiFi on/Hotspot on												
DL LTE CA Class	PCC						SCC				Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	19.05	19.06
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	19.78	19.74
CA_2A-5A	Band 2	20M	1860	18700	1	0	Band 5	10M	874	2450	19.06	19.06
	Band 5	10M	829	20450	1	25	Band 2	20M	1940	700	20.33	20.33
CA_2A-7A	Band 2	20M	1860	18700	1	0	Band 7	20M	2645.1	3001	19.10	19.06
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	17.99	17.99
CA_2A-12A	Band 2	20M	1860	18700	1	0	Band 12A	5M	743.5	5155	19.03	19.06
	Band 12A	5M	713.5	23155	12	13	Band 2	20M	1940	700	20.48	20.47
CA_2A-12B	Band 2	20M	1860	18700	1	0	Band 12B	10M	741	5130	19.09	19.06
	Band 12B	10M	711	23130	25	0	Band 2	20M	1940	700	20.37	20.38
CA_4A-5A	Band 4	20M	1720	20050	1	0	Band 5	10M	874	2450	19.73	19.74
	Band 5	10M	829	20450	1	25	Band 4	20M	2120	2050	20.34	20.33
CA_4A-7A	Band 4	20M	1720	20050	1	0	Band 7	20M	2645.1	3001	19.73	19.74
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	17.96	17.99
CA_4A-12A	Band 4	20M	1720	20050	1	0	Band 12A	5M	743.5	5155	19.77	19.74
CA_4A-12B	Band 4	20M	1720	20050	1	0	Band 12B	10M	741	5130	19.71	19.74
CA_5A-7A	Band 5	10M	829	20450	1	25	Band 7	20M	2645.1	3001	20.29	20.33
	Band 7	20M	2560	21350	1	99	Band 5	10M	874	2450	18.01	17.99
CA_5A-12A	Band 5	10M	829	20450	1	25	Band 12	10M	741	5130	20.29	20.33
CA_7A-12A	Band 7	20M	2560	21350	1	99	Band 12	10M	741	5130	17.96	17.99

3CC Interband-ANT2

Receiver on(Left head)																
DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MH z)	Freq (MH z)	Chann el	UL # RB	UL RB Offs et	LTE Band	BW (MH z)	Freq (MH z)	Chann el	LTE Band	BW (MH z)	Freq (MH z)	Chann el	LTE Rel 10 Tx.Power(dB m)	LTE Rel 8 Tx.Power(dB m)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 5	20M	874	2450	18.59	18.57
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	20.24	20.26
	Band 5	10M	829	20450	1	0	Band 4	20M	2120	2050	Band 2	20M	1940	700	21.16	21.08
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	18.6	18.57
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	20.22	20.26
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	15.49	15.51
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 12	10M	741	5130	18.56	18.57
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 12	10M	741	5130	20.23	20.26
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	18.54	18.57
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	741	5130	15.51	15.51
CA_4 A-7A- 12A	Band 4	20M	1720	20050	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	20.29	20.26
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 12	10M	741	5130	15.51	15.51
Receiver on(Right head)																
DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MH z)	Freq (MH z)	Chann el	UL # RB	UL RB Offs et	LTE Band	BW (MH z)	Freq (MH z)	Chann el	LTE Band	BW (MH z)	Freq (MH z)	Chann el	LTE Rel 10 Tx.Power(dB m)	LTE Rel 8 Tx.Power(dB m)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 5	20M	874	2450	17.05	17.08
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	18.24	18.25
	Band 5	10M	829	20450	1	0	Band 4	20M	2120	2050	Band 2	20M	1940	700	20.67	20.59
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	17.06	17.08
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	18.25	18.25
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	11.99	11.97
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 12	10M	741	5130	17.08	17.08
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 12	10M	741	5130	18.29	18.25
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	17.05	17.08
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	741	5130	12	11.97
CA_4 A-7A- 12A	Band 4	20M	1720	20050	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	18.27	18.25
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 12	10M	741	5130	11.97	11.97
Receiver off (Body Scene)																
DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MH z)	Freq (MH z)	Chann el	UL # RB	UL RB Offs et	LTE Band	BW (MH z)	Freq (MH z)	Chann el	LTE Band	BW (MH z)	Freq (MH z)	Chann el	LTE Rel 10 Tx.Power(dB m)	LTE Rel 8 Tx.Power(dB m)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 5	20M	874	2450	22.08	22.1
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	22.81	22.77

	Band 5	10M	829	20450	1	0	Band 4	20M	2120	2050	Band 2	20M	1940	700	23.07	23.14
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	22.14	22.1
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	22.78	22.77
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	19.51	19.5
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 12	10M	741	5130	22.14	22.1
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 12	10M	741	5130	22.77	22.77
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	22.11	22.1
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	741	5130	19.49	19.5
CA_4 A-7A- 12A	Band 4	20M	1720	20050	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	22.73	22.77
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 12	10M	741	5130	19.47	19.5

Receiver on(Left head) +WiFi on/Hotspot on

DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MHz)	Freq (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 5	20M	874	2450	15.95	15.92
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	17.21	17.2
	Band 5	10M	829	20450	25	0	Band 4	20M	2120	2050	Band 2	20M	1940	700	17.62	17.64
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	15.88	15.92
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	17.17	17.2
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	14.46	14.49
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 12	10M	741	5130	15.9	15.92
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 12	10M	741	5130	17.2	17.2
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	15.88	15.92
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	741	5130	14.49	14.49
CA_4 A-7A- 12A	Band 4	20M	1720	20050	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	17.19	17.2
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 12	10M	741	5130	14.53	14.49

Receiver on(Right head) +WiFi on/Hotspot on

DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MHz)	Freq (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Band	BW (MHz)	Freq (MHz)	Channel	LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	50	Band 4	20M	2120	2050	Band 5	20M	874	2450	14.36	14.34
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	15.01	15.04
	Band 5	10M	829	20450	25	13	Band 4	20M	2120	2050	Band 2	20M	1940	700	17.1	17.12
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	50	Band 4	20M	2120	2050	Band 7	20M	2680	3350	14.31	14.34
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	15.01	15.04
	Band 7	20M	2560	21350	50	50	Band 4	20M	2120	2050	Band 2	20M	1940	700	10.91	10.95
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	50	Band 4	20M	2120	2050	Band 12	10M	741	5130	14.32	14.34
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 12	10M	741	5130	15.06	15.04
CA_2 A-7A-	Band 2	20M	1860	18700	1	50	Band 7	20M	2680	3350	Band 12	10M	741	5130	14.3	14.34

12A	Band 7	20M	2560	21350	50	50	Band 2	20M	1940	700	Band 12	10M	741	5130	10.91	10.95
CA_4 A-7A- 12A	Band 4	20M	1720	20050	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	15.04	15.04
	Band 7	20M	2560	21350	50	50	Band 4	20M	2120	2050	Band 12	10M	741	5130	10.92	10.95
Receiver off (Body Scene)+WiFi on/Hotspot on																
DL LTE CA Class	PCC						SCC1				SCC2				Power	
	LTE Band	BW (MH z)	Freq (MH z)	Chann el	UL # RB	UL RB Offs et	LTE Band	BW (MH z)	Freq (MH z)	Chann el	LTE Band	BW (MH z)	Freq (MH z)	Chann el	LTE Rel 10 Tx.Power(dB m)	LTE Rel 8 Tx.Power(dB m)
CA_2 A-4A- 5A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 5	20M	874	2450	19.07	19.06
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 5	20M	874	2450	19.7	19.74
	Band 5	10M	829	20450	1	25	Band 4	20M	2120	2050	Band 2	20M	1940	700	20.26	20.33
CA_2 A-4A- 7A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	19.05	19.06
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	19.73	19.74
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	17.99	17.99
CA_2 A-4A- 12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 12	10M	741	5130	19.03	19.06
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 12	10M	741	5130	19.77	19.74
CA_2 A-7A- 12A	Band 2	20M	1860	18700	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	19.1	19.06
	Band 7	20M	2560	21350	1	99	Band 2	20M	1940	700	Band 12	10M	741	5130	18	17.99
CA_4 A-7A- 12A	Band 4	20M	1720	20050	1	0	Band 7	20M	2680	3350	Band 12	10M	741	5130	19.72	19.74
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 12	10M	741	5130	18.02	17.99

4CC Interband-ANT2

Receiver on(Left head)																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	186 0	1870 0	1	0	Band 4	20 M	212 0	2050	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	18.54	18.57
	Band 4	20 M	172 0	2005 0	1	0	Band 2	20 M	194 0	700	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	20.28	20.26
	Band 7	20 M	256 0	2135 0	1	99	Band 4	20 M	212 0	2050	Band 2	20 M	194 0	700	Band 12	10 M	741	5130	15.48	15.51
Receiver on(Right head)																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	186 0	1870 0	1	0	Band 4	20 M	212 0	2050	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	17.04	17.08
	Band 4	20 M	172 0	2005 0	1	0	Band 2	20 M	194 0	700	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	28.29	28.25
	Band 7	20 M	256 0	2135 0	1	99	Band 4	20 M	212 0	2050	Band 2	20 M	194 0	700	Band 12	10 M	741	5130	12.01	11.97
Receiver off (Body Scene)																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	186 0	1870 0	1	0	Band 4	20 M	212 0	2050	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	22.09	22.1
	Band 4	20 M	172 0	2005 0	1	0	Band 2	20 M	194 0	700	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	22.79	22.77
	Band 7	20 M	256 0	2135 0	1	99	Band 4	20 M	212 0	2050	Band 2	20 M	194 0	700	Band 12	10 M	741	5130	19.47	19.5
Receiver on(Left head) +WiFi on/Hotspot on																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	186 0	1870 0	1	50	Band 4	20 M	212 0	2050	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	15.93	15.92
	Band 4	20 M	172 0	2005 0	1	0	Band 2	20 M	194 0	700	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	17.2	17.2
	Band 7	20 M	256 0	2135 0	1	99	Band 4	20 M	212 0	2050	Band 2	20 M	194 0	700	Band 12	10 M	741	5130	14.48	14.49
Receiver on(Right head) +WiFi on/Hotspot on																				
DL LTE CA Class	PCC						SCC1				SCC2				SCC3				Power	
	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	U L# R B	UL RB Off set	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Band	BW (M Hz)	Fre q. (M Hz)	Cha nnel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20 M	186 0	1870 0	1	0	Band 4	20 M	212 0	2050	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	14.33	14.34
	Band 4	20 M	172 0	2005 0	1	0	Band 2	20 M	194 0	700	Band 7	20 M	268 0	3350	Band 12	10 M	741	5130	15.06	15.04
	Band 7	20 M	256 0	2135 0	50	50	Band 4	20 M	212 0	2050	Band 2	20 M	194 0	700	Band 12	10 M	741	5130	10.92	10.95
Receiver off (Body Scene)+WiFi on/Hotspot on																				
DL	PCC						SCC1				SCC2				SCC3				Power	

LTE CA Class	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Rel 10 Tx.Power (dBm)	LTE Rel 8 Tx.Power (dBm)
CA_2A-4A-7A-12A	Band 2	20M	1860	18700	1	0	Band 4	20M	2120	2050	Band 7	20M	2680	3350	Band 12	10M	741	5130	19.06	19.06
	Band 4	20M	1720	20050	1	0	Band 2	20M	1940	700	Band 7	20M	2680	3350	Band 12	10M	741	5130	19.73	19.74
	Band 7	20M	2560	21350	1	99	Band 4	20M	2120	2050	Band 2	20M	1940	700	Band 12	10M	741	5130	17.96	17.99

4X4MIMO-ANT1

LTE Band support DL 4*4MIMO Full Power													
Configure	PCC						SCC1				DL Antenna Configuration	Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel		LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20M	1745	20300	1	0	Band 4	20M	2120	2050	4*4MIMO	23.15	23.14
CA_7A-7A	Band 7	20MHz	2560	21350	1	99	Band 7	20M	2660.2	3152	4*4MIMO	22.97	22.94
Intra-band contiguous CA With DL 4*4MIMO Full Power													
Configure	PCC						SCC1				DL Antenna Configuration	Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel		LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7A-7A	Band 7	20MHz	2560	21350	1	99	Band 7	20M	2660.2	3152	4*4MIMO	22.95	22.94
Inter-band CA (two bands) With DL 4*4MIMO Full Power													
Configure	PCC						SCC1				DL Antenna Configuration	Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL # RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel		LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20MHz	1860	18700	1	0	Band 4	20MHz	2145	2300	4*4MIMO	23.11	23.12
	Band 4	20MHz	1745	20300	1	0	Band 2	20MHz	1980	1100	4*4MIMO	23.16	23.14
CA_2A-7A	Band 2	20MHz	1860	18700	1	0	Band 7	20MHz	2680	3350	4*4MIMO	23.14	23.12
	Band 7	20MHz	2560	21350	1	99	Band 2	20MHz	1980	1100	4*4MIMO	22.94	22.94
CA_4A-5A	Band 4	20MHz	1745	20300	1	0	Band 5	10MHz	874	2450	4*4MIMO	23.13	23.14
	Band 5	10MHz	829	20450	1	0	Band 4	20MHz	2145	2300	4*4MIMO	23.31	23.31
CA_4A-7A	Band 4	20MHz	1745	20300	1	0	Band 7	20MHz	2680	3350	4*4MIMO	23.12	23.14
	Band 7	20MHz	2560	21350	1	99	Band 4	20MHz	2145	2300	4*4MIMO	22.97	22.94
CA_4A-7C	Band 4	20MHz	1745	20300	1	0	Band 7	20MHz	2680	3350	4*4MIMO	23.12	23.14
	Band 7	20MHz	2560	21350	1	99	Band 4	20MHz	2145	2300	4*4MIMO	22.92	22.94
CA_4A-12A	Band 4	20MHz	1745	20300	1	0	Band 12	10MHz	741	5130	4*4MIMO	23.13	23.14
CA_4A-12B	Band 4	20MHz	1745	20300	1	0	Band 12	10MHz	741	5130	4*4MIMO	23.18	23.14
CA_5A-7A	Band 5	10MHz	829	20450	1	0	Band 7	20MHz	2680	3350	4*4MIMO	23.29	23.31
	Band 7	20MHz	2560	21350	1	99	Band 5	10MHz	874	2450	4*4MIMO	22.93	22.94
CA_7A-12A	Band 7	20MHz	2560	21350	1	99	Band 12	10MHz	741	5130	4*4MIMO	22.94	22.94
	Band 12	10MHz	711	23130	1	49	Band 7	20MHz	2680	3350	4*4MIMO	23.63	23.62

Inter-band CA (Three bands) With DL 4*4MIMO Full Power																	
Configure	PCC						SCC1				SCC2				DL Antenna Configuration	Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Band	BW (MHz)	Freq. (MHz)	Channel		LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A-5A	Band 2	20MHz	1860	1870	1	0	Band 4	20MHz	2145	2300	Band 5	10MHz	874	2450	4*4MIMO	23.16	23.12
	Band 4	20MHz	1745	2030	1	0	Band 2	20MHz	1980	1100	Band 5	10MHz	874	2450	4*4MIMO	23.1	23.14
	Band 5	10MHz	829	2045	1	0	Band 4	20MHz	2145	2300	Band 2	20MHz	194	700	4*4MIMO	23.28	23.31
CA_2A-4A-7A	Band 2	20MHz	1860	1870	1	0	Band 4	20MHz	2145	2300	Band 7	20MHz	2680	3350	4*4MIMO	23.11	23.12
	Band 4	20MHz	1745	2030	1	0	Band 2	20MHz	1980	1100	Band 7	20MHz	2680	3350	4*4MIMO	23.1	23.14
	Band 7	20MHz	2560	2135	1	99	Band 4	20MHz	2145	2300	Band 2	20MHz	194	700	4*4MIMO	22.94	22.94
CA_2A-4A-12A	Band 2	20MHz	1860	1870	1	0	Band 4	20MHz	2145	2300	Band 12	10MHz	741	5130	4*4MIMO	23.16	23.12
	Band 4	20MHz	1745	2030	1	0	Band 2	20MHz	1980	1100	Band 12	10MHz	741	5130	4*4MIMO	23.14	23.14
CA_4A-7A-12A	Band 4	20MHz	1745	2030	1	0	Band 7	20MHz	2680	3350	Band 12	10MHz	741	5130	4*4MIMO	23.1	23.14
	Band 7	20MHz	2560	2135	1	99	Band 4	20MHz	2145	2300	Band 12	10MHz	741	5130	4*4MIMO	22.97	22.94
CA_4A-12A-12A	Band 4	20MHz	1745	2030	1	0	Band 12	10MHz	741	5130	Band 12	10MHz	741	5130	4*4MIMO	23.15	23.14

4X4MIMO-ANT2

LTE Band support DL 4*4MIMO Full Power													
Configure	PCC						SCC1				DL Antenna Configuration	Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel		LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_4A-4A	Band 4	20MHz	1720	20050	1	0	Band 4	20MHz	2300	2145	4*4MIMO	22.75	22.77
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	20M	2660.2	3152	4*4MIMO	19.52	19.5
Intra-band contiguous CA With DL 4*4MIMO Full Power													
Configure	PCC						SCC1				DL Antenna Configuration	Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel		LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_7A-7A	Band 7	20M	2560	21350	1	99	Band 7	20M	2660.2	3152	4*4MIMO	19.54	19.5
Inter-band CA (two bands) With DL 4*4MIMO Full Power													
Configure	PCC						SCC1				DL Antenna Configuration	Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL# RB	UL RB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel		LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A	Band 2	20MHz	1860	18700	1	0	Band 4	20MHz	2120	2050	4*4MIMO	22.08	22.1
	Band 4	20MHz	1720	20050	1	0	Band 2	20MHz	1940	700	4*4MIMO	22.78	22.77
CA_2A-7A	Band 2	20MHz	1860	18700	1	0	Band 7	20MHz	2680	3350	4*4MIMO	22.08	22.1
	Band 7	20MHz	2560	21350	1	99	Band 2	20MHz	1940	700	4*4MIMO	19.48	19.5
CA_4A-5A	Band 4	20MHz	1720	20050	1	0	Band 5	10MHz	874	2450	4*4MIMO	22.74	22.77

	Band 5	10MHz	829	20450	1	0	Band 4	20MHz	2120	2050	4*4MIMO	23.15	23.12
CA_4A-7A	Band 4	20MHz	1720	20050	1	0	Band 7	20MHz	2680	3350	4*4MIMO	22.79	22.77
	Band 7	20MHz	2560	21350	1	99	Band 4	20MHz	2120	2050	4*4MIMO	19.48	19.5
CA_4A-7C	Band 4	20MHz	1720	20050	1	0	Band 7	20MHz	2680	3350	4*4MIMO	22.73	22.77
	Band 7	20MHz	2560	21350	1	99	Band 4	20MHz	2120	2050	4*4MIMO	19.54	19.5
CA_4A-12A	Band 4	20MHz	1720	20050	1	0	Band 12	10MHz	741	5130	4*4MIMO	22.76	22.77
CA_4A-12B	Band 4	20MHz	1720	20050	1	0	Band 12	10MHz	741	5130	4*4MIMO	22.76	22.77
CA_5A-7A	Band 5	10MHz	829	20450	1	0	Band 7	20MHz	2680	3350	4*4MIMO	23.15	23.12
	Band 7	20MHz	2560	21350	1	99	Band 5	10MHz	874	2450	4*4MIMO	19.46	19.5
CA_7A-12A	Band 7	20MHz	2560	21350	1	99	Band 12	10MHz	741	5130	4*4MIMO	19.46	19.5
	Band 12	10MHz	711	23130	1	25	Band 7	20MHz	2680	3350	4*4MIMO	23.53	23.51

Inter-band CA (Three bands) With DL 4*4MIMO Full Power																	
Configure	PCC						SCC1				SCC2				DL Antenna Configuration	Power	
	LTE Band	BW (MHz)	Freq. (MHz)	Channel	UL#	ULRB Offset	LTE Band	BW (MHz)	Freq. (MHz)	Channel	LTE Band	BW (MHz)	Freq. (MHz)	Channel		LTE Rel 10 Tx.Power(dBm)	LTE Rel 8 Tx.Power(dBm)
CA_2A-4A-5A	Band 2	20MHz	1860	1870	1	0	Band 4	20MHz	2120	2050	Band 5	10MHz	874	2450	4*4MIMO	22.13	22.1
	Band 4	20MHz	1720	20050	1	0	Band 2	20MHz	1940	700	Band 5	10MHz	874	2450	4*4MIMO	22.79	22.77
	Band 5	10MHz	829	20450	1	0	Band 4	20MHz	2120	2050	Band 2	20MHz	1940	700	4*4MIMO	23.08	23.12
CA_2A-4A-7A	Band 2	20MHz	1860	1870	1	0	Band 4	20MHz	2120	2050	Band 7	20MHz	2680	3350	4*4MIMO	22.11	22.1
	Band 4	20MHz	1720	20050	1	0	Band 2	20MHz	1940	700	Band 7	20MHz	2680	3350	4*4MIMO	22.78	22.77
	Band 7	20MHz	2560	21350	1	99	Band 4	20MHz	2120	2050	Band 2	20MHz	1940	700	4*4MIMO	19.53	19.5
CA_2A-4A-12A	Band 2	20MHz	1860	1870	1	0	Band 4	20MHz	2120	2050	Band 12	10MHz	741	5130	4*4MIMO	22.06	22.1
	Band 4	20MHz	1720	20050	1	0	Band 2	20MHz	1940	700	Band 12	10MHz	741	5130	4*4MIMO	22.8	22.77
CA_4A-7A-12A	Band 4	20MHz	1720	20050	1	0	Band 7	20MHz	2680	3350	Band 12	10MHz	741	5130	4*4MIMO	22.78	22.77
	Band 7	20MHz	2560	21350	1	99	Band 4	20MHz	2120	2050	Band 12	10MHz	741	5130	4*4MIMO	19.54	19.5
CA_4A-12A-12A	Band 4	20MHz	1720	20050	1	0	Band 12	10MHz	741	5130	Band 12	10MHz	741	5130	4*4MIMO	22.77	22.77

Note: Testing is not required in bands or modes not intended/allowed for US operation. According to KDB 941225 D05A, the downlink LTE CA SAR test is not required and PAG requirements can be excluded.

8.1.4 Conducted Power of WIFI and BT

WIFI2.4GHz Full Power (receiver off)							
Mode	Antenna	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11b	Ant1	1	2412	1	19.5	18.24	Yes
		6	2437		19.5	18.36	Yes
		11	2462		18	17.89	Yes
	Ant2	1	2412		19	18.08	Yes
		6	2437		19	17.67	Yes
		11	2462		18	17.65	Yes
802.11g	Ant1	1	2412	6	17.5	15.02	No
		6	2437		17.5	15.76	No
		11	2462		16	15.53	No
	Ant2	1	2412		17	14.95	No
		6	2437		17	15.06	No
		11	2462		16	15.65	No
802.11n HT20 SISO	Ant1	1	2412	6.5	16.5	13.83	No
		6	2437		16.5	14.72	No
		11	2462		15	14.42	No
	Ant2	1	2412		16	14.02	No
		6	2437		16	13.88	No
		11	2462		15	14.67	No
802.11g CDD	Ant1	1	2412	6	17.5	15.08	No
		6	2437		17.5	15.81	No
		11	2462		16	15.67	No
	Ant2	1	2412		17	15.55	No
		6	2437		17	15.33	No
		11	2462		16	15.89	No
802.11HT20MIMO	Sum	1	2412	13	19.3	16.94	No
		6	2437		19.3	17.33	No
		11	2462		18	17.56	No

WIFI2.4GHz receiver on(head scene)							
Mode	Antenna	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11b	Ant1	1	2412	1	16.5	15.16	Yes
		6	2437		16.5	15.28	Yes
		11	2462		16.5	15.25	Yes
	Ant2	1	2412		19	17.44	Yes
		6	2437		19	17.09	Yes
		11	2462		18	17.89	Yes
802.11g	Ant1	1	2412	6	16.5	13.84	No
		6	2437		16.5	14.64	No

	Ant2	11	2462		16	14.56	No
		1	2412		17	15.10	No
		6	2437		17	14.94	No
		11	2462		16	15.71	No
802.11n HT20 SISO	Ant1	1	2412	6.5	16.5	13.87	No
		6	2437		16.5	14.41	No
		11	2462		15	14.46	No
	Ant2	1	2412		16	14.01	No
		6	2437		16	13.99	No
		11	2462		15	14.66	No
802.11g CDD	Ant1	1	2412	6	16.5	15.05	No
		6	2437		16.5	15.79	No
		11	2462		16	15.77	No
	Ant2	1	2412		17	15.58	No
		6	2437		17	15.43	No
		11	2462		16	15.98	No
802.11HT20 MIMO	Sum	1	2412	13	19.3	16.95	No
		6	2437		19.3	17.22	No
		11	2462		18	17.57	No

WIFI5GHz Ant1 Full Power							
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	14	12.27	No
		40	5200		17	15.03	No
		44	5220		17	15.25	No
		48	5240		17	15.02	No
	U-NII-2A	52	5260		17	15.28	Yes
		56	5280		17	15.41	Yes
		60	5300		17	15.24	No
		64	5320		14	12.36	Yes
	U-NII-2C	100	5500		14	12.33	Yes
		104	5520		17	15.18	Yes
		108	5540		17	15.09	No
		112	5560		17	15.14	No
		116	5580		17	15.28	Yes
		120	5600		17	15.10	No

		124	5620		17	15.08	No		
		128	5640		17	15.07	No		
		132	5660		17	15.28	No		
		136	5680		17	15.31	Yes		
		140	5700		14	12.49	No		
		144	5720		14	12.41	Yes		
	U-NII-3	149	5745		17	15.54	Yes		
		153	5765		17	15.44	No		
		157	5785		17	15.29	Yes		
		161	5805		17	15.18	No		
		165	5825		17	15.24	Yes		
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test		
802.11n-HT20	U-NII-1	36	5180	MCS0	14	11.84	No		
		40	5200		17	14.56	No		
		44	5220		17	14.61	No		
		48	5240		17	14.46	No		
	U-NII-2A	52	5260		17	14.63	No		
		56	5280		17	14.82	No		
		60	5300		17	14.73	No		
		64	5320		14	11.89	No		
	U-NII-2C	100	5500		14	11.77	No		
		104	5520		17	14.64	No		
		108	5540		17	14.52	No		
		112	5560		17	14.51	No		
		116	5580		17	14.50	No		
		120	5600		17	14.63	No		
		124	5620		17	14.46	No		
		128	5640		17	14.64	No		
		132	5660		17	14.66	No		
		136	5680		17	14.69	No		
		140	5700		14	11.84	No		
		144	5720		14	11.99	No		
	U-NII-3	149	5745		17	14.91	No		
		153	5765		17	14.82	No		
		157	5785		17	14.73	No		
		161	5805		17	14.68	No		
		165	5825		17	14.66	No		
	5GHz	mode	Channel		Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
	802.11n-HT40	U-NII-1	38		5190	MCS0	11.5	9.26	No
46			5230	14.5	12.05		No		
U-NII-2A		54	5270	14.5	12.21		No		
		62	5310	11.5	9.24		No		

		102	5510		11.5	9.14	No		
		110	5550		14.5	11.03	No		
		118	5590		14.5	11.82	No		
		126	5630		14.5	11.87	No		
		134	5670		14.5	12.24	No		
		142	5710		11.5	9.09	No		
	U-NII-3	151	5755		14.5	12.32	No		
		159	5795		14.5	12.08	No		
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test		
802.11ac 20M	U-NII-1	36	5180	MCS0	14	11.88	No		
		40	5200		17	14.58	No		
		44	5220		17	14.51	No		
		48	5240		17	14.46	No		
	U-NII-2A	52	5260		17	14.72	No		
		56	5280		17	14.82	No		
		60	5300		17	14.79	No		
		64	5320		14	11.86	No		
	U-NII-2C	100	5500		14	11.78	No		
		104	5520		17	14.68	No		
		108	5540		17	14.61	No		
		112	5560		17	14.54	No		
		116	5580		17	14.55	No		
		120	5600		17	14.63	No		
		124	5620		17	14.48	No		
		128	5640		17	14.79	No		
		132	5660		17	14.67	No		
		136	5680		17	14.72	No		
		140	5700		14	11.96	No		
		144	5720		14	11.93	No		
	U-NII-3	149	5745		17	14.93	No		
		153	5765		17	14.83	No		
		157	5785		17	14.81	No		
		161	5805		17	14.64	No		
		165	5825		17	14.63	No		
	5GHz	mode	Channel		Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
	802.11ac 40M	U-NII-1	38		5190	MCS0	11.5	9.25	No
			46		5230		14.5	12.03	No
U-NII-2A		54	5270	14.5	12.24		No		
		62	5310	11.5	9.22		No		
U-NII-2C		102	5510	11.5	9.19		No		
		110	5550	14.5	11.98		No		
		118	5590	14.5	11.84		No		

		126	5630		14.5	11.91	No
		134	5670		14.5	12.21	No
		142	5710		11.5	9.09	No
	U-NII-3	151	5755		14.5	12.25	No
		159	5795		14.5	12.09	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	11.5	8.85	No
	U-NII-2A	58	5290		11.5	8.73	No
	U-NII-2C	106	5530		11.5	8.46	No
		122	5610		13	9.74	No
		138	5690		11.5	8.55	No
	U-NII-3	155	5775		13	10.11	No
	WIFI5GHz Ant2 Full Power						
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	11	9.64	No
		40	5200		14	12.55	No
		44	5220		14	12.64	No
		48	5240		14	12.72	No
	U-NII-2A	52	5260		14	12.96	Yes
		56	5280		14	13.01	No
		60	5300		14	13.15	Yes
		64	5320		11	10.23	Yes
	U-NII-2C	100	5500		11	9.82	Yes
		104	5520		14	12.83	Yes
		108	5540		14	12.87	No
		112	5560		14	13.02	No
		116	5580		14	13.09	Yes
		120	5600		14	13.13	No
		124	5620		14	13.18	No
		128	5640		14	13.22	No
		132	5660		14	13.35	Yes
		136	5680		14	13.08	No
		140	5700		11	10.62	No
		144	5720		11	10.35	Yes
	U-NII-3	149	5745		14	12.81	Yes
		153	5765		14	12.61	No
		157	5785		14	12.52	Yes
		161	5805		14	12.43	No
		165	5825		14	12.56	Yes

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test		
802.11n-HT20	U-NII-1	36	5180	MCS0	11	9.57	No		
		40	5200		14	12.62	No		
		44	5220		14	12.52	No		
		48	5240		14	12.77	No		
	U-NII-2A	52	5260		14	13.01	No		
		56	5280		14	12.98	No		
		60	5300		14	13.12	No		
		64	5320		11	10.11	No		
	U-NII-2C	100	5500		11	9.89	No		
		104	5520		14	12.91	No		
		108	5540		14	12.93	No		
		112	5560		14	13.15	No		
		116	5580		14	13.05	No		
		120	5600		14	13.18	No		
		124	5620		14	13.28	No		
		128	5640		14	13.31	No		
		132	5660		14	13.24	No		
		136	5680		14	13.17	No		
		140	5700		11	10.19	No		
		144	5720		11	9.96	No		
	U-NII-3	149	5745		14	12.88	No		
		153	5765		14	12.92	No		
		157	5785		14	12.66	No		
		161	5805		14	12.67	No		
165		5825	14	12.69	No				
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test		
802.11n-HT40	U-NII-1	38	5190	MCS0	10	8.46	No		
		46	5230		11.5	9.87	No		
	U-NII-2A	54	5270		11.5	10.25	No		
		62	5310		10	8.92	No		
	U-NII-2C	102	5510		10	8.79	No		
		110	5550		11.5	10.51	No		
		118	5590		11.5	10.59	No		
		126	5630		11.5	10.79	No		
		134	5670		11.5	10.72	No		
		142	5710		10	9.09	No		
	U-NII-3	151	5755		11.5	10.47	No		
		159	5795		11.5	10.08	No		
	5GHz	mode	Channel		Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test

802.11ac 20M	U-NII-1	36	5180	MCS0	11	9.77	No
		40	5200		14	12.55	No
		44	5220		14	12.69	No
		48	5240		14	12.78	No
	U-NII-2A	52	5260		14	12.92	No
		56	5280		14	13.01	No
		60	5300		14	13.02	No
		64	5320		11	10.01	No
	U-NII-2C	100	5500		11	9.91	No
		104	5520		14	12.97	No
		108	5540		14	12.98	No
		112	5560		14	13.07	No
		116	5580		14	13.14	No
		120	5600		14	13.26	No
		124	5620		14	13.25	No
		128	5640		14	13.21	No
		132	5660		14	13.34	No
		136	5680		14	13.06	No
	U-NII-3	140	5700		11	10.25	No
		144	5720		11	9.98	No
149		5745	14	12.99	No		
153		5765	14	12.81	No		
157		5785	14	12.67	No		
		161	5805	14	12.56	No	
		165	5825	14	12.55	No	
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS0	10	8.46	No
		46	5230		11.5	9.96	No
	U-NII-2A	54	5270		11.5	10.19	No
		62	5310		10	9.01	No
	U-NII-2C	102	5510		10	8.93	No
		110	5550		11.5	10.51	No
		118	5590		11.5	10.77	No
		126	5630		11.5	10.75	No
		134	5670		11.5	10.68	No
		142	5710		10	9.09	No
U-NII-3	151	5755	11.5	10.39	No		
	159	5795	11.5	10.07	No		
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS0	10	8.41	No
	U-NII-2A	58	5290		10	8.66	No
	U-NII-2C	106	5530		10	8.51	No

		122	5610		10	8.88	No		
		138	5690		10	8.65	No		
	U-NII-3	155	5775		10	8.23	No		
WIFI5GHz CDD Full Power									
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test		
802.11a	U-NII-1	36	5180	12	15.8	14.16	No		
		40	5200		18.8	16.98	No		
		44	5220		18.8	17.15	No		
		48	5240		18.8	17.03	No		
	U-NII-2A	52	5260		18.8	17.28	No		
		56	5280		18.8	17.38	No		
		60	5300		18.8	17.33	No		
		64	5320		15.8	14.44	No		
	U-NII-2C	100	5500		15.8	14.26	No		
		104	5520		18.8	17.17	No		
		108	5540		18.8	17.13	No		
		112	5560		18.8	17.22	No		
		116	5580		18.8	17.33	No		
		120	5600		18.8	17.24	No		
		124	5620		18.8	17.24	No		
		128	5640		18.8	17.25	No		
		132	5660		18.8	17.43	No		
		136	5680		18.8	17.35	No		
		140	5700		15.8	14.67	No		
		144	5720		15.8	14.51	No		
	U-NII-3	149	5745		18.8	17.40	No		
		153	5765		18.8	17.26	No		
		157	5785		18.8	17.13	No		
		161	5805		18.8	17.03	No		
		165	5825		18.8	17.11	No		
	WIFI5GHz MIMO Full Power								

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT20	U-NII-1	36	5180	MCS8	15.8	13.86	No
		40	5200		18.8	16.71	No
		44	5220		18.8	16.70	No
		48	5240		18.8	16.71	No
	U-NII-2A	52	5260		18.8	16.91	No
		56	5280		18.8	17.01	No
		60	5300		18.8	17.01	No
		64	5320		15.8	14.10	No
	U-NII-2C	100	5500		15.8	13.94	No
		104	5520		18.8	16.87	No
		108	5540		18.8	16.81	No
		112	5560		18.8	16.89	No
		116	5580		18.8	16.85	No
		120	5600		18.8	16.98	No
		124	5620		18.8	16.92	No
		128	5640		18.8	17.04	No
		132	5660		18.8	17.02	No
		136	5680		18.8	17.01	No
		140	5700		15.8	14.10	No
		144	5720		15.8	14.10	No
	U-NII-3	149	5745		18.8	17.02	No
		153	5765		18.8	16.98	No
		157	5785		18.8	16.83	No
		161	5805		18.8	16.80	No
165		5825	18.8	16.80	No		
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT40	U-NII-1	38	5190	MCS8	13.8	11.89	No
		46	5230		16.3	14.11	No
	U-NII-2A	54	5270		16.3	14.35	No
		62	5310		13.8	12.09	No
	U-NII-2C	102	5510		13.8	11.98	No
		110	5550		16.3	13.79	No
		118	5590		16.3	14.26	No
		126	5630		16.3	14.37	No
		134	5670		16.3	14.56	No
		142	5710		13.8	12.10	No
	U-NII-3	151	5755		16.3	14.50	No
		159	5795		16.3	14.20	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test

802.11ac 20M	U-NII-1	36	5180	MCS8	15.8	13.96	No
		40	5200		18.8	16.69	No
		44	5220		18.8	16.71	No
		48	5240		18.8	16.71	No
	U-NII-2A	52	5260		18.8	16.92	No
		56	5280		18.8	17.02	No
		60	5300		18.8	17.01	No
		64	5320		15.8	14.04	No
	U-NII-2C	100	5500		15.8	13.96	No
		104	5520		18.8	16.92	No
		108	5540		18.8	16.88	No
		112	5560		18.8	16.88	No
		116	5580		18.8	16.91	No
		120	5600		18.8	17.01	No
		124	5620		18.8	16.92	No
		128	5640		18.8	17.08	No
		132	5660		18.8	17.07	No
		136	5680		18.8	16.98	No
	U-NII-3	140	5700		15.8	14.20	No
		144	5720		15.8	14.07	No
149		5745	18.8	17.08	No		
153		5765	18.8	16.95	No		
157		5785	18.8	16.88	No		
		161	5805	18.8	16.73	No	
		165	5825	18.8	16.72	No	
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS8	13.8	11.88	No
		46	5230		16.3	14.13	No
	U-NII-2A	54	5270		16.3	14.35	No
		62	5310		13.8	12.13	No
	U-NII-2C	102	5510		13.8	12.07	No
		110	5550		16.3	14.32	No
		118	5590		16.3	14.35	No
		126	5630		16.3	14.38	No
		134	5670		16.3	14.52	No
		142	5710		13.8	12.10	No
U-NII-3	151	5755	16.3	14.43	No		
	159	5795	16.3	14.21	No		
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS8	13.8	11.65	No
	U-NII-2A	58	5290		13.8	11.71	No
	U-NII-2C	106	5530		13.8	11.50	No

		122	5610		14.8	12.34	No
		138	5690		13.8	11.61	No
	U-NII-3	155	5775		14.8	12.28	No

WIFI5GHz Ant1 receiver on(head scene)							
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	6	11	10.46	No
		40	5200		11	10.55	No
		44	5220		11	10.47	No
		48	5240		11	10.45	No
	U-NII-2A	52	5260		11	10.52	No
		56	5280		11	10.61	No
		60	5300		11	10.55	No
		64	5320		11	10.59	No
	U-NII-2C	100	5500		9	8.27	No
		104	5520		9	8.09	No
		108	5540		9	8.01	No
		112	5560		9	8.14	No
		116	5580		9	8.11	No
		120	5600		9	8.06	No
		124	5620		9	8.07	No
		128	5640		9	8.10	No
		132	5660		9	8.32	No
		136	5680		9	8.37	No
		140	5700		9	8.41	No
		144	5720		9	8.17	No
	U-NII-3	149	5745		9	8.72	No
		153	5765		9	8.71	No
		157	5785		9	8.47	No
		161	5805		9	8.37	No
165		5825	9	8.45	No		
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT20	U-NII-1	36	5180	MCS0	11	9.96	No
		40	5200		11	9.75	No
		44	5220		11	9.88	No
		48	5240		11	9.85	No
	U-NII-2A	52	5260		11	9.91	No
		56	5280		11	10.08	No
		60	5300		11	9.94	No
	U-NII-	64	5320		11	10.14	No
		100	5500		9	7.77	No

	2C	104	5520		9	7.63	No
		108	5540		9	7.51	No
		112	5560		9	7.65	No
		116	5580		9	7.44	No
		120	5600		9	7.54	No
		124	5620		9	7.56	No
		128	5640		9	7.64	No
		132	5660		9	7.73	No
		136	5680		9	7.81	No
		140	5700		9	7.94	No
	144	5720	9		7.77	No	
	U-NII-3	149	5745		9	8.02	No
		153	5765		9	7.91	No
		157	5785		9	8.05	No
		161	5805		9	7.93	No
165		5825	9	7.67	No		
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT40	U-NII-1	38	5190	MCS0	11	9.88	No
		46	5230		11	9.73	No
	U-NII-2A	54	5270		11	9.85	No
		62	5310		11	9.82	No
	U-NII-2C	102	5510		9	8.02	No
		110	5550		9	7.95	No
		118	5590		9	7.76	No
		126	5630		9	7.79	No
		134	5670		9	8.02	No
	U-NII-3	142	5710		9	8.03	No
		151	5755		9	8.09	No
			159		5795	9	7.82
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 20M	U-NII-1	36	5180	MCS0	11	9.97	No
		40	5200		11	9.95	No
		44	5220		11	9.86	No
		48	5240		11	9.74	No
	U-NII-2A	52	5260		11	10.22	No
		56	5280		11	9.96	No
		60	5300		11	9.95	No
		64	5320		11	10.23	No
	U-NII-2C	100	5500		9	7.67	No
		104	5520		9	7.64	No
		108	5540		9	7.63	No
		112	5560		9	7.45	No

		116	5580		9	7.52	No		
		120	5600		9	7.61	No		
		124	5620		9	7.67	No		
		128	5640		9	7.63	No		
		132	5660		9	7.86	No		
		136	5680		9	7.78	No		
		140	5700		9	7.83	No		
		144	5720		9	7.81	No		
	U-NII-3	149	5745		9	8.11	No		
		153	5765		9	7.97	No		
		157	5785		9	7.81	No		
		161	5805		9	7.79	No		
		165	5825		9	7.77	No		
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test		
802.11ac 40M	U-NII-1	38	5190	MCS0	11	9.94	No		
		46	5230		11	9.86	No		
	U-NII-2A	54	5270		11	9.88	No		
		62	5310		11	9.99	No		
	U-NII-2C	102	5510		9	7.96	No		
		110	5550		9	7.69	No		
		118	5590		9	7.76	No		
		126	5630		9	7.83	No		
		134	5670		9	7.98	No		
		142	5710		9	8.05	No		
	U-NII-3	151	5755		9	8.14	No		
		159	5795		9	7.83	No		
	5GHz	mode	Channel		Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
	802.11ac 80M	U-NII-1	42		5210	MCS0	11	9.32	No
U-NII-2A		58	5290	11	9.21		Yes		
U-NII-2C		106	5530	9	7.24		Yes		
		122	5610	9	7.14		Yes		
		138	5690	9	7.32		Yes		
U-NII-3		155	5775	9	7.38		Yes		
WIFI5GHz Ant2 receiver on(head scene)									
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test		
802.11a	U-NII-1	36	5180	6	11	10.56	No		
		40	5200		11	10.38	No		
		44	5220		11	10.41	No		
		48	5240		11	10.57	No		
	U-NII-2A	52	5260		11	10.59	No		

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test	
802.11n-HT20	U-NII-2C	56	5280	MCS0	11	10.56	No	
		60	5300		11	10.51	No	
		64	5320		11	10.50	No	
		100	5500		11	10.81	No	
		104	5520		11	10.57	No	
		108	5540		11	10.71	No	
		112	5560		11	10.82	No	
		116	5580		11	10.88	No	
		120	5600		11	10.74	No	
		124	5620		11	10.67	No	
		128	5640		11	10.74	No	
		132	5660		11	10.74	No	
		136	5680		11	10.72	No	
		140	5700		11	10.61	No	
		144	5720		11	10.85	No	
	U-NII-3	149	5745		11	10.39	No	
		153	5765		11	10.42	No	
		157	5785		11	10.37	No	
		161	5805		11	10.39	No	
		165	5825		11	10.60	No	
	802.11n-HT20	U-NII-1	36		5180	11	9.98	No
			40		5200	11	9.81	No
			44		5220	11	9.84	No
			48		5240	11	9.78	No
		U-NII-2A	52		5260	11	10.10	No
			56		5280	11	10.09	No
			60		5300	11	10.07	No
		U-NII-2C	64		5320	11	10.01	No
100			5500	11	10.25	No		
104			5520	11	10.21	No		
108			5540	11	10.05	No		
112			5560	11	10.18	No		
116			5580	11	10.17	No		
120			5600	11	10.33	No		
124			5620	11	10.32	No		
128	5640		11	10.31	No			
132	5660		11	10.35	No			
136	5680		11	10.16	No			
140	5700	11	10.14	No				
144	5720	11	10.03	No				
U-NII-3	149	5745	11	10.18	No			
	153	5765	11	9.88	No			
	157	5785	11	9.94	No			

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test	
		161	5805		11	9.86	No	
		165	5825		11	9.83	No	
802.11n-HT40	U-NII-1	38	5190	MCS0	10	8.44	No	
		46	5230		11	9.57	No	
	U-NII-2A	54	5270		11	9.79	Yes	
		62	5310		10	8.89	Yes	
	U-NII-2C	102	5510		10	8.86	Yes	
			110		5550	11	9.08	No
			118		5590	11	9.81	No
			126		5630	11	10.09	No
			134		5670	11	10.13	Yes
			142		5710	10	9.08	Yes
	U-NII-3	151	5755		11	9.75	Yes	
		159	5795		11	9.61	Yes	
802.11ac 20M	U-NII-1	36	5180		MCS0	11	9.98	No
		40	5200			11	9.79	No
		44	5220			11	9.83	No
		48	5240			11	9.78	No
	U-NII-2A	52	5260	11		10.12	No	
			56	5280		11	10.30	No
			60	5300		11	10.06	No
			64	5320		11	10.13	No
	U-NII-2C	100	5500	11		10.19	No	
			104	5520		11	10.17	No
			108	5540		11	10.16	No
			112	5560		11	10.18	No
			116	5580		11	10.23	No
			120	5600		11	10.31	No
			124	5620		11	10.35	No
			128	5640		11	10.28	No
			132	5660		11	10.25	No
			136	5680		11	10.13	No
			140	5700		11	10.12	No
			144	5720		11	10.05	No
	U-NII-3	149	5745	11		9.98	No	
			153	5765		11	9.93	No
			157	5785		11	9.98	No
			161	5805		11	9.79	No
			165	5825		11	9.96	No

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS0	10	8.49	No
		46	5230		11	9.57	No
	U-NII-2A	54	5270		11	9.64	No
		62	5310		10	8.83	No
	U-NII-2C	102	5510		10	9.03	No
		110	5550		11	9.85	No
		118	5590		11	10.14	No
		126	5630		11	10.08	No
		134	5670		11	10.07	No
		142	5710		10	9.07	No
	U-NII-3	151	5755		11	9.99	No
		159	5795		11	9.64	No
	5GHz	mode	Channel		Frequency(MHz)	Data Rate(Mbps)	Tune up
802.11ac 80M	U-NII-1	42	5210	MCS0	10	8.01	No
	U-NII-2A	58	5290		10	8.25	No
	U-NII-2C	106	5530		10	8.31	No
		122	5610		10	8.33	No
		138	5690		10	8.17	No
	U-NII-3	155	5775		10	7.85	No
	WIFI5GHz CDD receiver on(head scene)						
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11a	U-NII-1	36	5180	12	14	13.52	No
		40	5200		14	13.48	No
		44	5220		14	13.45	No
		48	5240		14	13.52	No
	U-NII-2A	52	5260		14	13.57	No
		56	5280		14	13.60	No
		60	5300		14	13.54	No
		64	5320		14	13.56	No
	U-NII-2C	100	5500		13.1	12.73	No
		104	5520		13.1	12.52	No
		108	5540		13.1	12.58	No
		112	5560		13.1	12.69	No
		116	5580		13.1	12.72	No
		120	5600		13.1	12.61	No
		124	5620		13.1	12.57	No
		128	5640		13.1	12.63	No
		132	5660		13.1	12.71	No
		136	5680		13.1	12.71	No

	U-NII-3	140	5700		13.1	12.66	No
		144	5720		13.1	12.72	No
		149	5745		13.1	12.65	No
		153	5765		13.1	12.66	No
		157	5785		13.1	12.53	No
		161	5805		13.1	12.51	No
		165	5825		13.1	12.67	No

WIFI5GHz MIMO receiver on(head scene)

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT20	U-NII-1	36	5180	MCS8	14	12.98	No
		40	5200		14	12.79	No
		44	5220		14	12.87	No
		48	5240		14	12.83	No
	U-NII-2A	52	5260		14	13.02	No
		56	5280		14	13.10	No
		60	5300		14	13.02	No
		64	5320		14	13.09	No
	U-NII-2C	100	5500		13.1	12.20	No
		104	5520		13.1	12.12	No
		108	5540		13.1	11.97	No
		112	5560		13.1	12.11	No
		116	5580		13.1	12.03	No
		120	5600		13.1	12.17	No
		124	5620		13.1	12.17	No
		128	5640		13.1	12.19	No
		132	5660		13.1	12.25	No
		136	5680		13.1	12.15	No
	U-NII-3	140	5700		13.1	12.19	No
		144	5720		13.1	12.06	No
		149	5745		13.1	12.24	No
		153	5765		13.1	12.02	No
		157	5785		13.1	12.11	No
		161	5805		13.1	12.01	No
165	5825	13.1	11.89	No			
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11n-HT40	U-NII-1	38	5190	MCS8	13.5	12.23	No
		46	5230		14	12.66	No
	U-NII-2A	54	5270		14	12.83	No
		62	5310		13.5	12.39	No
	U-NII-2C	102	5510		12.5	11.47	No
		110	5550		13.1	11.56	No

5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 20M	U-NII-1	36	5180	MCS8	14	12.99	No
		40	5200		14	12.88	No
		44	5220		14	12.86	No
		48	5240		14	12.77	No
	U-NII-2A	52	5260		14	13.18	No
		56	5280		14	13.14	No
		60	5300		14	13.02	No
		64	5320		14	13.19	No
	U-NII-2C	100	5500		13.1	12.12	No
		104	5520		13.1	12.10	No
		108	5540		13.1	12.09	No
		112	5560		13.1	12.04	No
		116	5580		13.1	12.09	No
		120	5600		13.1	12.18	No
		124	5620		13.1	12.22	No
		128	5640		13.1	12.16	No
		132	5660		13.1	12.23	No
		136	5680		13.1	12.12	No
U-NII-3	140	5700	13.1	12.14	No		
	144	5720	13.1	12.08	No		
	149	5745	13.1	12.16	No		
	153	5765	13.1	12.07	No		
	157	5785	13.1	12.04	No		
		159	5795	13.1	11.82	No	
		151	5755	13.1	12.01	No	
		126	5630	13.1	12.10	No	
		134	5670	13.1	12.21	No	
		142	5710	12.5	11.60	No	
		118	5590	13.1	11.92	No	
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 40M	U-NII-1	38	5190	MCS8	13.5	11.42	No
		46	5230		14	13.44	No
	U-NII-2A	54	5270		14	13.44	No
		62	5310		13.5	11.23	No
	U-NII-2C	102	5510		12.5	10.55	No
		110	5550		13.1	12.48	No
		118	5590		13.1	12.56	No
		126	5630		13.1	12.56	No
		134	5670		13.1	12.73	No
		142	5710		12.5	10.75	No

	U-NII-3	151	5755		13.1	13.03	No
		159	5795		13.1	13.01	No
5GHz	mode	Channel	Frequency(MHz)	Data Rate(Mbps)	Tune up	Average Power (dBm)	SAR Test
802.11ac 80M	U-NII-1	42	5210	MCS8	13.5	11.73	No
	U-NII-2A	58	5290		13.5	11.77	No
	U-NII-2C	106	5530		12.5	10.82	No
		122	5610		12.5	10.79	No
		138	5690		12.5	10.78	No
	U-NII-3	155	5775		12.5	10.63	No

Table 17: Conducted Power Of WIFI

Note:

- a) Power must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band.
- b) Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.
 - 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
 - 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.
- c) For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured.

BT			Tune up (dBm)	Average Conducted Power(dBm)
Modulation	Channel	Frequency(MHz)		GFSK
GFSK	0	2402	11	9.01
	5	2407	11	9.16
	10	2412	11	9.19
GFSK	11	2413	11.7	10.43
	39	2441	11.7	10.52
	58	2460	11.7	10.49
GFSK	59	2461	11.2	9.87
	65	2467	11.2	9.91
	70	2472	11.2	9.76
GFSK	71	2473	10.3	9.28
	75	2477	10.3	9.31
	78	2480	10.3	9.24
π/4DQPSK	0	2402	6	3.55
	5	2407	6	3.12
	10	2412	6	3.74
π/4DQPSK	11	2413	6.5	4.43
	39	2441	6.5	4.85
	58	2460	6.5	4.79
π/4DQPSK	59	2461	6.3	4.12
	65	2467	6.3	4.24
	70	2472	6.3	4.51
π/4DQPSK	71	2473	5	2.96
	75	2477	5	2.9
	78	2480	5	2.81
8DPSK	0	2402	6	3.49
	5	2407	6	3.1
	10	2412	6	3.73
8DPSK	11	2413	6.5	4.28
	39	2441	6.5	4.72
	58	2460	6.5	4.67
8DPSK	59	2461	6.3	4.07
	65	2467	6.3	4.09
	70	2472	6.3	4.49
8DPSK	71	2473	5	2.84
	75	2477	5	2.82
	78	2480	5	2.69
BLE			Tune up (dBm)	Average Conducted Power(dBm)
Modulation	Channel	Frequency(MHz)		GFSK
GFSK	0	2402	5	1.28
	3	2408	5	1.85
	5	2412	5	2.06
GFSK	6	2414	5.3	2.16
	19	2440	5.3	2.26
	31	2464	5.3	1.71
GFSK	32	2466	5.1	1.58
	33	2468	5.1	1.72

	34	2470	5.1	1.25
GFSK	35	2472	3.7	0.97
	37	2476	3.7	0.28
	39	2480	3.7	-0.23

Note : As different maximum tune-up output power is specified across the different channels range. So the additional conducted power measurement for the adjacent channel of each power level stage is also performed in this report to ensure compliance.

8.2 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq. Band	Frequency (GHz)	Position	Average Power		Test Separation (mm)	Calculate Value	Exclusion Threshold	Exclusion (Y/N)
			dBm	mW				
Bluetooth	2.48	Head	11.7	14.79	0	4.66	3	N
		Body-worn	11.7	14.79	15	1.55	3	Y
		Hotspot	11.7	14.79	10	2.33	3	Y

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

8.3 Measurement of SAR Data

8.3.1 SAR Result Of GSM850

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	190/836.6	1:8.3	0.128	-0.02	32.75	33.6	1.216	0.156	22.1
Left tilted	GSM	190/836.7	1:8.3	0.0813	0.07	32.75	33.6	1.216	0.099	22.1
Right cheek	GSM	190/836.8	1:8.3	0.214	-0.01	32.75	33.6	1.216	0.260	22.1
Right tilted	GSM	190/836.9	1:8.3	0.0787	0.14	32.75	33.6	1.216	0.096	22.1
Right cheek	GSM	128/824.2	1:8.3	0.225	-0.04	32.59	33.6	1.262	0.284	22.1
Right cheek	GSM	251/848.8	1:8.3	0.181	0.07	32.81	33.6	1.199	0.217	22.1
Head Test Data at the worst case with Battery 2#										
Right cheek	GSM	128/824.2	1:8.3	0.214	0.03	32.59	33.6	1.262	0.270	22.1
Head Test Data at the worst case with Battery 3#										
Right cheek	GSM	128/824.2	1:8.3	0.221	0	32.59	33.6	1.262	0.279	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	190/836.6	1:8.3	0.298	-0.12	32.75	33.6	1.216	0.362	22.1
Back side	GSM	190/836.6	1:8.3	0.327	0.07	32.75	33.6	1.216	0.398	22.1
Front side	GPRS 2TS	190/836.6	1:4.15	0.365	-0.09	30.59	32	1.384	0.505	22.1
Back side	GPRS 2TS	190/836.6	1:4.15	0.44	0.06	30.59	32	1.384	0.609	22.1
Back side	GPRS 2TS	128/824.2	1:4.15	0.398	-0.1	30.42	32	1.439	0.573	22.1
Back side	GPRS 2TS	251/848.8	1:4.15	0.419	0.09	30.57	32	1.390	0.582	22.1
Body worn Test data with Battery 2#										
Back side	GPRS 2TS	190/836.6	1:4.15	0.418	0.01	30.59	32	1.384	0.578	22.1
Body worn Test data with Battery 3#										
Back side	GPRS 2TS	190/836.6	1:4.15	0.413	-0.04	30.59	32	1.384	0.571	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 2TS	190/836.6	1:4.15	0.562	-0.1	30.59	32	1.384	0.778	22.1
Back side	GPRS 2TS	190/836.6	1:4.15	0.599	0.07	30.59	32	1.384	0.829	22.1
Left side	GPRS 2TS	190/836.6	1:4.15	0.119	-0.05	30.59	32	1.384	0.165	22.1
Right side	GPRS 2TS	190/836.6	1:4.15	0.431	-0.05	30.59	32	1.384	0.596	22.1
Bottom side	GPRS 2TS	190/836.6	1:4.15	0.417	0.08	30.59	32	1.384	0.577	22.1
Back side	GPRS 2TS	128/824.2	1:4.15	0.471	0.08	30.42	32	1.439	0.678	22.1
Back side	GPRS 2TS	251/848.8	1:4.15	0.652	-0.08	30.57	32	1.390	0.906	22.1
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Back side	GPRS 2TS	251/848.8	1:4.15	0.633	-0.03	30.57	32	1.390	0.880	22.1
Hotspot Test Data at the worst case with Battery 3#(10mm)										
Back side	GPRS 2TS	251/848.8	1:4.15	0.561	0.04	30.57	32	1.390	0.780	22.1
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp

Head Test data										
Left cheek	GSM	190/836.6	1:8.3	0.61	0.05	29.62	30.6	1.253	0.764	22.1
Left tilted	GSM	190/836.6	1:8.3	0.497	0.08	29.62	30.6	1.253	0.623	22.1
Right cheek	GSM	190/836.6	1:8.3	0.553	-0.03	29.59	30.6	1.262	0.698	22.1
Right tilted	GSM	190/836.6	1:8.3	0.577	0.14	29.59	30.6	1.262	0.728	22.1
Left cheek	GSM	128/824.2	1:8.3	0.613	0.02	29.49	30.6	1.291	0.792	22.1
Left cheek	GSM	251/848.8	1:8.3	0.579	-0.02	29.61	30.6	1.256	0.727	22.1
Head Test Data at the worst case with Battery 2#										
Left cheek	GSM	128/824.2	1:8.3	0.564	0.11	29.49	30.6	1.291	0.728	22.1
Head Test Data at the worst case with Battery 3#										
Left cheek	GSM	128/824.2	1:8.3	0.529	0.07	29.49	30.6	1.291	0.683	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	190/836.6	1:8.3	0.0927	0.04	33.05	33.6	1.135	0.105	22.1
Back side	GSM	190/836.6	1:8.3	0.0826	-0.13	33.05	33.6	1.135	0.094	22.1
Front side	GPRS 2TS	190/836.6	1:4.15	0.227	0.04	31.13	32	1.222	0.277	22.1
Back side	GPRS 2TS	190/836.6	1:4.15	0.22	-0.08	31.13	32	1.222	0.269	22.1
Front side	GPRS 2TS	128/824.2	1:4.15	0.231	0.01	31.01	32	1.256	0.29	22.1
Front side	GPRS 2TS	251/848.8	1:4.15	0.23	0.01	31.22	32	1.197	0.275	22.1
Body worn Test data with Battery 2#										
Front side	GPRS 2TS	128/824.2	1:4.15	0.234	0.03	31.01	32	1.256	0.294	22.1
Body worn Test data with Battery 3#										
Front side	GPRS 2TS	128/824.2	1:4.15	0.227	0.05	31.01	32	1.256	0.285	22.1
Hotspot activated for WIFI Test data(Separate 10mm)										
Front side	GPRS 2TS	190/836.6	1:4.15	0.209	0.05	27.94	29	1.276	0.267	22.1
Back side	GPRS 2TS	190/836.6	1:4.15	0.198	-0.01	27.94	29	1.276	0.253	22.1
Left side	GPRS 2TS	190/836.6	1:4.15	0.0817	-0.05	27.94	29	1.276	0.104	22.1
Right side	GPRS 2TS	190/836.6	1:4.15	0.189	-0.04	27.94	29	1.276	0.241	22.1
Top side	GPRS 2TS	190/836.6	1:4.15	0.144	-0.04	27.94	29	1.276	0.184	22.1
Front side	GPRS 2TS	128/824.2	1:4.15	0.231	0.14	27.88	29	1.294	0.299	22.1
Front side	GPRS 2TS	251/848.8	1:4.15	0.196	0.07	27.92	29	1.282	0.251	22.1
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Front side	GPRS 2TS	128/824.2	1:4.15	0.194	0.09	27.88	29	1.294	0.251	22.1
Hotspot Test Data at the worst case with Battery 3#(10mm)										
Front side	GPRS 2TS	128/824.2	1:4.15	0.211	-0.08	27.88	29	1.294	0.273	22.1

Table 18: SAR of GSM850 for Head and Body (Original report E5/2018/20036).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case										
Right cheek	GSM	128/824.2	1:8.3	0.221	-0.04	32.59	33.6	1.262	0.279	22.1
Head Test data at the worst case with SIM2										
Right cheek	GSM	128/824.2	1:8.3	0.22	0.01	32.59	33.6	1.262	0.278	22.1
Body worn Test data at the worst case(Separate 15mm)										
Back side	GPRS 2TS	190/836.6	1:4.15	0.422	0	30.59	32	1.384	0.584	22.1
Body worn Test data at the worst case(Separate 15mm) with SIM2										
Back side	GPRS 2TS	190/836.6	1:4.15	0.413	0.01	30.59	32	1.384	0.571	22.1
Hotspot Test data at the worst case(Separate 10mm)										
Back side	GPRS 2TS	251/848.8	1:4.15	0.564	-0.01	30.57	32	1.390	0.784	22.1
Hotspot Test data at the worst case(Separate 10mm) with SIM2										
Back side	GPRS 2TS	251/848.8	1:4.15	0.556	-0.06	30.57	32	1.390	0.773	22.1
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case										
Left cheek	GSM	128/824.2	1:8.3	0.536	-0.01	29.49	30.6	1.291	0.692	22.1
Head Test data at the worst case with SIM2										
Left cheek	GSM	128/824.2	1:8.3	0.55	0.09	29.49	30.6	1.291	0.710	22.1
Body worn Test data at the worst case(Separate 15mm)										
Front side	GPRS 2TS	128/824.2	1:4.15	0.257	0.06	31.01	32	1.256	0.323	22.1
Body worn Test data at the worst case(Separate 15mm) with SIM2										
Front side	GPRS 2TS	128/824.2	1:4.15	0.254	0	31.01	32	1.256	0.319	22.1
Hotspot activated for WIFI Test data at the worst case(Separate 10mm)										
Front side	GPRS 2TS	128/824.2	1:4.15	0.256	-0.1	27.88	29	1.294	0.299	22.1
Hotspot activated for WIFI Test data at the worst case(Separate 10mm) with SIM2										
Front side	GPRS 2TS	128/824.2	1:4.15	0.251	-0.03	27.88	29	1.294	0.299	22.1
Ant2 Additional Test data(simultaneous transmission with 2.4G WIFI)										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Left tilted	GSM	190/836.6	1:8.3	0.255	0.03	26.77	27.6	1.211	0.309	22.1

Table 19: SAR of GSM850 for Head and Body (Variant).

8.3.2 SAR Result Of GSM1900

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	661/1880	1:8.3	0.063	0.18	30.25	31	1.189	0.075	22.1
Left tilted	GSM	661/1880	1:8.3	0.02	0.08	30.25	31	1.189	0.024	22.1
Right cheek	GSM	661/1880	1:8.3	0.054	0.06	30.25	31	1.189	0.064	22.1
Right tilted	GSM	661/1880	1:8.3	0.069	0.02	30.25	31	1.189	0.082	22.1
Right tilted	GSM	512/1850.2	1:8.3	0.0553	0.12	30.24	31	1.191	0.066	22.1
Right tilted	GSM	810/1909.8	1:8.3	0.0639	-0.03	30.33	31	1.167	0.075	22.1
Head Test Data at the worst case with Battery 2#										
Right tilted	GSM	661/1880	1:8.3	0.0433	0.05	30.25	31	1.189	0.051	22.1
Head Test Data at the worst case with Battery 3#										
Right tilted	GSM	661/1880	1:8.3	0.0656	-0.01	30.25	31	1.189	0.078	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	661/1880	1:8.3	0.263	0.06	30.25	31	1.189	0.313	22.1
Back side	GSM	661/1880	1:8.3	0.254	-0.04	30.25	31	1.189	0.302	22.1
Front side	GPRS 2TS	661/1880	1:4.15	0.308	0.07	27.83	29	1.309	0.403	22.1
Back side	GPRS 2TS	661/1880	1:4.15	0.279	0.19	27.83	29	1.309	0.365	22.1
Front side	GPRS 2TS	512/1850.2	1:4.15	0.251	-0.04	27.81	29	1.315	0.330	22.1
Front side	GPRS 2TS	810/1909.8	1:4.15	0.305	0.05	27.79	29	1.321	0.403	22.1
Body worn Test Data at the worst case with Battery 2#										
Front side	GPRS 2TS	661/1880	1:4.15	0.273	0.07	27.83	29	1.309	0.357	22.1
Body worn Test Data at the worst case with Battery 3#										
Front side	GPRS 2TS	661/1880	1:4.15	0.270	0.01	27.83	29	1.309	0.353	22.1
Hotspot Test data(Separate 10mm)										
Front side	GPRS 2TS	661/1880	1:4.15	0.212	0.02	24.6	26	1.380	0.293	22.1
Back side	GPRS 2TS	661/1880	1:4.15	0.231	-0.09	24.6	26	1.380	0.319	22.1
Left side	GPRS 2TS	661/1880	1:4.15	0.066	-0.07	24.6	26	1.380	0.091	22.1
Right side	GPRS 2TS	661/1880	1:4.15	0.022	-0.06	24.6	26	1.380	0.030	22.1
Bottom side	GPRS 2TS	661/1880	1:4.15	0.403	-0.08	24.6	26	1.380	0.556	22.1
Bottom side	GPRS 2TS	512/1850.2	1:4.15	0.353	-0.06	24.7	26	1.349	0.476	22.1
Bottom side	GPRS 2TS	810/1909.8	1:4.15	0.517	0.09	24.6	26	1.380	0.714	22.1
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Bottom side	GPRS 2TS	810/1909.8	1:4.15	0.517	-0.01	24.6	26	1.380	0.714	22.1
Hotspot Test Data at the worst case with Battery 3#(10mm)										
Bottom side	GPRS 2TS	810/1909.8	1:4.15	0.495	-0.11	24.6	26	1.380	0.683	22.1

Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Full Power Test data Limbs SAR (Separate 0mm)										
Bottom side	GPRS 2TS	661/1880	1:4.15	2.12	0.09	27.83	29	1.309	2.775	22.1
Bottom side	GPRS 2TS	512/1850.2	1:4.15	2.41	0.15	27.81	29	1.315	3.170	22.1
Bottom side	GPRS 2TS	810/1909.8	1:4.15	1.87	-0.02	27.79	29	1.321	2.471	22.1
Full Power Test data Limbs SAR at the worst case with Battery 2# (Separate 0mm)										
Bottom side	GPRS 2TS	512/1850.2	1:4.15	2.27	0.12	27.81	29	1.315	2.986	22.1
Full Power Test data Limbs SAR at the worst case with Battery 3# (Separate 0mm)										
Bottom side	GPRS 2TS	512/1850.2	1:4.15	2.36	0.06	27.81	29	1.315	3.104	22.1
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	GSM	661/1880	1:8.3	0.366	0.11	27.96	28	1.009	0.369	22.1
Left tilted	GSM	661/1880	1:8.3	0.513	0.08	27.96	28	1.009	0.518	22.1
Right cheek	GSM	661/1880	1:8.3	0.447	0.10	26.98	27	1.005	0.449	22.1
Right tilted	GSM	661/1880	1:8.3	0.505	0.01	26.98	27	1.005	0.507	22.1
Left tilted	GSM	512/1850.2	1:8.3	0.279	0.06	27.92	28	1.019	0.284	22.1
Left tilted	GSM	810/1909.8	1:8.3	0.591	0.02	27.95	28	1.012	0.598	22.1
Head Test Data at the worst case with Battery 2#										
Left tilted	GSM	810/1909.8	1:8.3	0.584	0.01	27.95	28	1.012	0.591	22.1
Head Test Data at the worst case with Battery 3#										
Left tilted	GSM	810/1909.8	1:8.3	0.582	0.08	27.95	28	1.012	0.589	22.1
Body worn Test data(Separate 15mm)										
Front side	GSM	661/1880	1:8.3	0.063	0.09	30.91	31.5	1.146	0.072	22.1
Back side	GSM	661/1880	1:8.3	0.0855	0.06	30.91	31.5	1.146	0.098	22.1
Front side	GPRS 2TS	661/1880	1:4.15	0.202	0.17	28.85	29.5	1.161	0.235	22.1
Back side	GPRS 2TS	661/1880	1:4.15	0.274	0.13	28.85	29.5	1.161	0.318	22.1
Back side	GPRS 2TS	512/1850.2	1:4.15	0.26	0.15	28.84	29.5	1.164	0.303	22.1
Back side	GPRS 2TS	810/1909.8	1:4.15	0.272	0.01	28.87	29.5	1.156	0.314	22.1
Body worn Test Data at the worst case with Battery 2#										
Back side	GPRS 2TS	661/1880	1:4.15	0.267	0.03	28.85	29.5	1.161	0.310	22.1
Body worn Test Data at the worst case with Battery 3#										
Back side	GPRS 2TS	661/1880	1:4.15	0.266	0.04	28.85	29.5	1.161	0.309	22.1
Hotspot activated for WIFI Test data(Separate 10mm)										
Front side	GPRS 2TS	661/1880	1:4.15	0.165	0.07	25.94	26.5	1.138	0.188	22.1
Back side	GPRS 2TS	661/1880	1:4.15	0.221	0.01	25.94	26.5	1.138	0.251	22.1
Left side	GPRS 2TS	661/1880	1:4.15	0.157	0.07	25.94	26.5	1.138	0.179	22.1
Right side	GPRS 2TS	661/1880	1:4.15	0.0285	0.08	25.94	26.5	1.138	0.032	22.1
Top side	GPRS 2TS	661/1880	1:4.15	0.335	0.04	25.94	26.5	1.138	0.381	22.1

Top side	GPRS 2TS	512/1850.2	1:4.15	0.325	0.05	25.79	26.5	1.178	0.383	22.1
Top side	GPRS 2TS	810/1909.8	1:4.15	0.338	-0.05	25.89	26.5	1.151	0.389	22.1
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Top side	GPRS 2TS	810/1909.8	1:4.15	0.335	-0.17	25.89	26.5	1.151	0.386	22.1
Hotspot Test Data at the worst case with Battery 3#(10mm)										
Top side	GPRS 2TS	810/1909.8	1:4.15	0.337	0.04	25.89	26.5	1.151	0.388	22.1

Table 20: SAR of GSM1900 for Head, Body and Limbs (Original report E5/2018/20036).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) Per FCC KDB Publication 447498 D01, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case										
Right tilted	GSM	661/1880	1:8.3	0.042	-0.08	30.25	31	1.189	0.050	22.1
Head Test data at the worst case with SIM2										
Right tilted	GSM	661/1880	1:8.3	0.0489	0.03	30.25	31	1.189	0.058	22.1
Body worn Test data at the worst case(Separate 15mm)										
Front side	GPRS 2TS	661/1880	1:4.15	0.298	-0.02	27.83	29	1.309	0.390	22.1
Body worn Test data at the worst case(Separate 15mm) with SIM2										
Front side	GPRS 2TS	661/1880	1:4.15	0.297	0.04	27.83	29	1.309	0.389	22.1
Hotspot Test data at the worst case(Separate 10mm)										
Bottom side	GPRS 2TS	810/1909.8	1:4.15	0.606	-0.08	24.6	26	1.380	0.837	22.1
Hotspot Test data at the worst case(Separate 10mm) with SIM2										
Bottom side	GPRS 2TS	810/1909.8	1:4.15	0.606	-0.08	24.6	26	1.380	0.837	22.1
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Full Power Test data Limbs SAR (Separate 0mm)										
Bottom side	GPRS 2TS	512/1850.2	1:4.15	2.09	0	27.83	29	1.309	2.736	22.1
Full Power Test data Limbs SAR with SIM2 (Separate 0mm)										
Bottom side	GPRS 2TS	512/1850.2	1:4.15	2.05	0.04	27.83	29	1.309	2.684	22.1
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case										
Left tilted	GSM	810/1909.8	1:8.3	0.581	0.07	27.95	28	1.012	0.588	22.1
Head Test data at the worst case with SIM2										
Left tilted	GSM	810/1909.8	1:8.3	0.559	-0.07	27.95	28	1.012	0.565	22.1
Body worn Test data at the worst case(Separate 15mm)										
Back side	GPRS 2TS	661/1880	1:4.15	0.265	0.07	28.85	29.5	1.161	0.308	22.1
Body worn Test data at the worst case(Separate 15mm) with SIM2										
Back side	GPRS 2TS	661/1880	1:4.15	0.264	0.07	28.85	29.5	1.161	0.307	22.1
Hotspot Test data at the worst case(Separate 10mm)										
Top side	GPRS 2TS	810/1909.8	1:4.15	0.371	-0.05	25.89	26.5	1.151	0.427	22.1
Hotspot Test data at the worst case(Separate 10mm) with SIM2										
Top side	GPRS 2TS	810/1909.8	1:4.15	0.367	-0.09	25.89	26.5	1.151	0.422	22.1

Ant2 Additional Test data(simultaneous transmission with 5G WIFI)										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Left tilted	GSM	810/1909.8	1:8.3	0.406	0.05	27.95	28	1.012	0.411	22.1

Table 21: SAR of GSM1900 for Head, Body and Limbs(Variant).

8.3.3 SAR Result Of WCDMA Band V

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	4182/836.4	1:1	0.219	-0.02	23.66	24.5	1.213	0.266	22.3
Left tilted	RMC	4182/836.4	1:1	0.114	-0.15	23.66	24.5	1.213	0.138	22.3
Right cheek	RMC	4182/836.4	1:1	0.255	0.13	23.66	24.5	1.213	0.309	22.3
Right tilted	RMC	4182/836.4	1:1	0.116	0.09	23.66	24.5	1.213	0.141	22.3
Right cheek	RMC	4132/826.4	1:1	0.235	-0.11	23.61	24.5	1.227	0.288	22.3
Right cheek	RMC	4233/846.6	1:1	0.26	0.07	23.72	24.5	1.197	0.311	22.3
Head Test Data at the worst case with Battery 2#										
Right cheek	RMC	4233/846.6	1:1	0.236	0.14	23.72	24.5	1.197	0.282	22.3
Head Test Data at the worst case with Battery 3#										
Right cheek	RMC	4233/846.6	1:1	0.258	0.1	23.72	24.5	1.197	0.309	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	4182/836.4	1:1	0.341	-0.14	23.66	24.5	1.213	0.414	22.3
Back side	RMC	4182/836.4	1:1	0.372	0.03	23.66	24.5	1.213	0.451	22.3
Back side	RMC	4132/826.4	1:1	0.345	0.04	23.61	24.5	1.227	0.423	22.3
Back side	RMC	4233/846.6	1:1	0.371	0.06	23.72	24.5	1.197	0.444	22.3
Body worn Test Data at the worst case with Battery 2#										
Back side	RMC	4182/836.4	1:1	0.38	0.06	23.66	24.5	1.213	0.461	22.3
Body worn Test Data at the worst case with Battery 3#										
Back side	RMC	4182/836.4	1:1	0.408	0.06	23.66	24.5	1.213	0.495	22.3
Hotspot Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.497	-0.07	23.66	24.5	1.213	0.603	22.3
Back side	RMC	4182/836.4	1:1	0.557	0.06	23.66	24.5	1.213	0.676	22.3
Left side	RMC	4182/836.4	1:1	0.101	-0.15	23.66	24.5	1.213	0.123	22.3
Right side	RMC	4182/836.4	1:1	0.369	-0.07	23.66	24.5	1.213	0.448	22.3
Bottom side	RMC	4182/836.4	1:1	0.317	-0.04	23.66	24.5	1.213	0.385	22.3
Back side	RMC	4132/826.4	1:1	0.528	0.08	23.61	24.5	1.227	0.648	22.3
Back side	RMC	4233/846.6	1:1	0.572	0.05	23.72	24.5	1.197	0.685	22.3
Hotspot Test Data at the worst case with Battery 2#										
Back side	RMC	4233/846.6	1:1	0.609	0.06	23.72	24.5	1.197	0.729	22.3
Hotspot Test Data at the worst case with Battery 3#										
Back side	RMC	4233/846.6	1:1	0.6	0.06	23.72	24.5	1.197	0.718	22.3
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										

Left cheek	RMC	4182/836.4	1:1	0.425	0.03	19.29	20.5	1.321	0.562	22.3
Left tilted	RMC	4182/836.4	1:1	0.345	0.16	19.29	20.5	1.321	0.456	22.3
Right cheek	RMC	4182/836.4	1:1	0.373	-0.08	19.29	20.5	1.321	0.493	22.3
Right tilted	RMC	4182/836.4	1:1	0.327	0.07	19.29	20.5	1.321	0.432	22.3
Left cheek	RMC	4132/826.4	1:1	0.432	0.03	19.4	20.5	1.288	0.557	22.3
Left cheek	RMC	4233/846.6	1:1	0.433	0.1	19.3	20.5	1.318	0.571	22.3
Head Test Data at the worst case with Battery 2#										
Left cheek	RMC	4233/846.6	1:1	0.379	-0.03	19.3	20.5	1.318	0.500	22.3
Head Test Data at the worst case with Battery 3#										
Left cheek	RMC	4233/846.6	1:1	0.392	-0.07	19.3	20.5	1.318	0.517	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	4182/836.4	1:1	0.175	0.06	23.28	24.5	1.324	0.232	22.3
Back side	RMC	4182/836.4	1:1	0.179	-0.09	23.28	24.5	1.324	0.237	22.3
Back side	RMC	4132/826.4	1:1	0.201	-0.09	23.35	24.5	1.303	0.262	22.3
Back side	RMC	4233/846.6	1:1	0.169	-0.1	23.32	24.5	1.312	0.222	22.3
Body worn Test Data at the worst case with Battery 2#										
Back side	RMC	4132/826.4	1:1	0.154	-0.12	23.35	24.5	1.303	0.201	22.3
Body worn Test Data at the worst case with Battery 3#										
Back side	RMC	4132/826.4	1:1	0.16	-0.07	23.35	24.5	1.303	0.209	22.3
Hotspot activated for WIFI Test data(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.174	0.05	20.26	21.5	1.330	0.231	22.3
Back side	RMC	4182/836.4	1:1	0.159	-0.09	20.26	21.5	1.330	0.212	22.3
Left side	RMC	4182/836.4	1:1	0.055	0.13	20.26	21.5	1.330	0.073	22.3
Right side	RMC	4182/836.4	1:1	0.0113	-0.2	20.26	21.5	1.330	0.015	22.3
Top side	RMC	4182/836.4	1:1	0.122	-0.06	20.26	21.5	1.330	0.162	22.3
Front side	RMC	4132/826.4	1:1	0.17	-0.14	20.34	21.5	1.306	0.222	22.3
Front side	RMC	4233/846.6	1:1	0.148	0.1	20.27	21.5	1.327	0.196	22.3
Hotspot Test Data at the worst case with Battery 2#										
Front side	RMC	4182/836.4	1:1	0.166	-0.01	20.26	21.5	1.330	0.221	22.3
Hotspot Test Data at the worst case with Battery 3#										
Front side	RMC	4182/836.4	1:1	0.178	0.03	20.26	21.5	1.330	0.237	22.3

Table 22: SAR of WCDMA Band V for Head and Body(Original report E5/2018/20036).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the Worst Case										
Right cheek	RMC	4233/846.6	1:1	0.256	0.07	23.72	24.5	1.197	0.306	22.3
Head Test data at the Worst Case with SIM2										
Right cheek	RMC	4233/846.6	1:1	0.262	0.14	23.72	24.5	1.197	0.314	22.3
Body worn Test data at the Worst Case(Separate 15mm)										
Back side	RMC	4182/836.4	1:1	0.41	0.03	23.66	24.5	1.213	0.497	22.3
Body worn Test data at the Worst Case(Separate 15mm) with SIM2										
Back side	RMC	4182/836.4	1:1	0.406	0.01	23.66	24.5	1.213	0.493	22.3
Hotspot Test data at the Worst Case(Separate 10mm)										
Back side	RMC	4233/846.6	1:1	0.59	0.02	23.72	24.5	1.197	0.706	22.3
Hotspot Test data at the Worst Case(Separate 10mm) with SIM2										
Back side	RMC	4233/846.6	1:1	0.581	-0.03	23.72	24.5	1.197	0.695	22.3
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the Worst Case										
Left cheek	RMC	4233/846.6	1:1	0.359	-0.02	19.3	20.5	1.318	0.473	22.3
Head Test data at the Worst Case with SIM2										
Left cheek	RMC	4233/846.6	1:1	0.377	-0.01	19.3	20.5	1.318	0.497	22.3
Body worn Test data at the Worst Case(Separate 15mm)										
Back side	RMC	4132/826.4	1:1	0.163	-0.01	23.35	24.5	1.303	0.212	22.3
Body worn Test data at the Worst Case(Separate 15mm) with SIM2										
Back side	RMC	4132/826.4	1:1	0.162	0.01	23.35	24.5	1.303	0.211	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm)										
Front side	RMC	4182/836.4	1:1	0.173	-0.05	20.26	21.5	1.330	0.230	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm) with SIM2										
Front side	RMC	4182/836.4	1:1	0.161	0	20.26	21.5	1.330	0.214	22.3

Table 23: SAR of WCDMA Band V for Head and Body(Variant).

8.3.4 SAR Result Of WCDMA Band IV

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	1412/1732.4	1:1	0.0817	-0.05	23.31	24	1.172	0.096	22.3
Left tilted	RMC	1412/1732.4	1:1	0.0287	-0.1	23.31	24	1.172	0.034	22.3
Right cheek	RMC	1412/1732.4	1:1	0.0875	0.04	23.31	24	1.172	0.103	22.3
Right tilted	RMC	1412/1732.4	1:1	0.0351	0.06	23.31	24	1.172	0.041	22.3
Right cheek	RMC	1312/1712.4	1:1	0.0845	-0.06	23.29	24	1.178	0.100	22.3
Right cheek	RMC	1513/1752.6	1:1	0.0875	0.06	23.36	24	1.159	0.101	22.3
Head Test Data at the worst case with Battery 2#										
Right cheek	RMC	1412/1732.4	1:1	0.113	0.06	23.31	24	1.172	0.132	22.3
Head Test Data at the worst case with Battery 3#										
Right cheek	RMC	1412/1732.4	1:1	0.104	0.09	23.31	24	1.172	0.122	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	1412/1732.4	1:1	0.393	-0.08	23.31	24	1.172	0.461	22.3
Back side	RMC	1412/1732.4	1:1	0.405	-0.04	23.31	24	1.172	0.475	22.3
Back side	RMC	1312/1712.4	1:1	0.421	-0.02	23.29	24	1.178	0.496	22.3
Back side	RMC	1513/1752.6	1:1	0.428	-0.05	23.36	24	1.159	0.496	22.3
Body worn Test Data at the worst case with Battery 2#										
Back side	RMC	1513/1752.6	1:1	0.324	0	23.36	24	1.159	0.375	22.3
Body worn Test Data at the worst case with Battery 3#										
Back side	RMC	1513/1752.6	1:1	0.283	0.06	23.36	24	1.159	0.328	22.3
Hotspot Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.296	0.02	18.18	19	1.208	0.358	22.3
Back side	RMC	1412/1732.4	1:1	0.26	-0.18	18.18	19	1.208	0.314	22.3
Left side	RMC	1412/1732.4	1:1	0.0371	0.08	18.18	19	1.208	0.045	22.3
Right side	RMC	1412/1732.4	1:1	0.0197	0.05	18.18	19	1.208	0.024	22.3
Bottom side	RMC	1412/1732.4	1:1	0.496	0.08	18.18	19	1.208	0.599	22.3
Bottom side	RMC	1312/1712.4	1:1	0.47	0.03	18.16	19	1.213	0.570	22.3
Bottom side	RMC	1513/1752.6	1:1	0.505	0.04	18.35	19	1.161	0.587	22.3
Hotspot Test Data at the worst case with Battery 2#										
Bottom side	RMC	1412/1732.4	1:1	0.395	0.01	18.18	19	1.208	0.477	22.3
Hotspot Test Data at the worst case with Battery 3#										
Bottom side	RMC	1412/1732.4	1:1	0.379	0.05	18.18	19	1.208	0.458	22.3
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Limbs Test data with sensor on(Separate 0mm)										
Bottom side	RMC	1412/1732.4	1:1	2.13	0.08	21.17	22	1.211	2.579	22.3
Bottom side	RMC	1312/1712.4	1:1	2.11	0.06	21.21	22	1.199	2.531	22.3
Bottom side	RMC	1513/1752.6	1:1	2.1	0.06	21.39	22	1.151	2.417	22.3
Limbs Test data with sensor off(Separate 9mm)										

Bottom side	RMC	1412/1732.4	1:1	0.806	0.01	23.31	24	1.172	0.945	22.1
Bottom side	RMC	1312/1712.4	1:1	0.706	0.05	23.29	24	1.178	0.831	22.1
Bottom side	RMC	1513/1752.6	1:1	0.823	0.01	23.36	24	1.159	0.954	22.1
Limbs Test data at the worst case with Battery 2#										
Bottom side	RMC	1412/1732.4	1:1	2.15	0.18	21.17	22	1.211	2.603	22.3
Limb Test data at the worst case with Battery 3#										
Bottom side	RMC	1412/1732.4	1:1	2.21	-0.09	21.17	22	1.211	2.675	22.3
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	1412/1732.4	1:1	0.444	0.01	20.02	20.5	1.117	0.496	22.3
Left tilted	RMC	1412/1732.4	1:1	0.699	0.01	20.02	20.5	1.117	0.781	22.3
Right cheek	RMC	1412/1732.4	1:1	0.587	0.12	18.52	19	1.117	0.656	22.3
Right tilted	RMC	1412/1732.4	1:1	0.619	0.06	18.52	19	1.117	0.691	22.3
Left tilted	RMC	1312/1712.4	1:1	0.677	-0.06	19.98	20.5	1.127	0.763	22.3
Left tilted	RMC	1513/1752.6	1:1	0.684	-0.03	20.01	20.5	1.119	0.766	22.3
Head Test Data at the worst case with Battery 2#										
Left tilted	RMC	1412/1732.4	1:1	0.585	-0.01	20.02	20.5	1.117	0.653	22.3
Head Test Data at the worst case with Battery 3#										
Left tilted	RMC	1412/1732.4	1:1	0.622	-0.01	20.02	20.5	1.117	0.695	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	1412/1732.4	1:1	0.213	-0.01	22.33	23	1.167	0.249	22.3
Back side	RMC	1412/1732.4	1:1	0.291	0.03	22.33	23	1.167	0.340	22.3
Back side	RMC	1312/1712.4	1:1	0.289	0.01	22.26	23	1.186	0.343	22.3
Back side	RMC	1513/1752.6	1:1	0.269	0.01	22.37	23	1.156	0.311	22.3
Body worn Test Data at the worst case with Battery 2#										
Back side	RMC	1312/1712.4	1:1	0.26	0.02	22.26	23	1.186	0.308	22.3
Body worn Test Data at the worst case with Battery 3#										
Back side	RMC	1312/1712.4	1:1	0.236	-0.14	22.26	23	1.186	0.280	22.3
Hotspot activated for WIFI Test data(Separate 10mm)										
Front side	RMC	1412/1732.4	1:1	0.185	0.07	19.41	20	1.146	0.212	22.3
Back side	RMC	1412/1732.4	1:1	0.246	-0.15	19.41	20	1.146	0.282	22.3
Left side	RMC	1412/1732.4	1:1	0.185	-0.07	19.41	20	1.146	0.212	22.3
Right side	RMC	1412/1732.4	1:1	0.0218	-0.02	19.41	20	1.146	0.025	22.3
Top side	RMC	1412/1732.4	1:1	0.332	-0.06	19.41	20	1.146	0.380	22.3
Top side	RMC	1312/1712.4	1:1	0.323	-0.03	19.26	20	1.186	0.383	22.3
Top side	RMC	1513/1752.6	1:1	0.312	-0.02	19.38	20	1.153	0.360	22.3
Hotspot Test Data at the worst case with Battery 2#										
Top side	RMC	1312/1712.4	1:1	0.297	-0.01	19.26	20	1.186	0.352	22.3
Hotspot Test Data at the worst case with Battery 3#										
Top side	RMC	1312/1712.4	1:1	0.283	-0.08	19.26	20	1.186	0.336	22.3

Ant2 Additional Test data(simultaneous transmission with WIFI)										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left tilted	RMC	1412/1732.4	1:1	0.3	-0.02	17.15	17.5	1.084	0.325	22.3

Table 24: SAR of WCDMA Band IV for Head , Body and Limb (Original report E5/2018/20036)

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg (2.0 W/kg for 10g) then testing at the other channels is not required for such test configuration(s).

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case										
Right cheek	RMC	1412/1732.4	1:1	0.0987	0	23.31	24	1.172	0.116	22.3
Head Test data at the worst case with SIM2										
Right cheek	RMC	1412/1732.4	1:1	0.0947	-0.09	23.31	24	1.172	0.111	22.3
Body worn Test data at the worst case(Separate 15mm)										
Back side	RMC	1513/1752.6	1:1	0.398	-0.05	23.36	24	1.159	0.461	22.3
Body worn Test data at the worst case(Separate 15mm) with SIM2										
Back side	RMC	1513/1752.6	1:1	0.385	-0.13	23.36	24	1.159	0.446	22.3
Hotspot Test data at the worst case(Separate 10mm)										
Bottom side	RMC	1412/1732.4	1:1	0.454	0.09	18.18	19	1.208	0.548	22.3
Hotspot Test data at the worst case(Separate 10mm) with SIM2										
Bottom side	RMC	1412/1732.4	1:1	0.435	-0.01	18.18	19	1.208	0.525	22.3
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Limb Test data sensor on(Separate 0mm)										
Bottom side	RMC	1412/1732.4	1:1	2.21	-0.07	21.17	22	1.211	2.675	22.3
Limb Test data sensor on(Separate 0mm)with SIM2										
Bottom side	RMC	1412/1732.4	1:1	2.2	-0.06	21.17	22	1.211	2.663	22.3
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case										
Left tilted	RMC	1412/1732.4	1:1	0.496	0	20.02	20.5	1.117	0.554	22.3
Head Test data at the worst case with SIM2										
Left tilted	RMC	1412/1732.4	1:1	0.487	-0.06	20.02	20.5	1.117	0.544	22.3
Body worn Test data at the worst case(Separate 15mm)										
Back side	RMC	1312/1712.4	1:1	0.204	-0.03	22.26	23	1.186	0.242	22.3
Body worn Test data at the worst case(Separate 15mm) with SIM2										
Back side	RMC	1312/1712.4	1:1	0.191	0	22.26	23	1.186	0.226	22.3
Hotspot Test data at the worst case(Separate 10mm)										
Top side	RMC	1312/1712.4	1:1	0.238	-0.02	19.26	20	1.186	0.282	22.3
Hotspot Test data at the worst case(Separate 10mm) with SIM2										
Top side	RMC	1312/1712.4	1:1	0.224	0.1	19.26	20	1.186	0.266	22.3

Table 25: SAR of WCDMA Band IV for Head , Body and Limb (Variant)

8.3.5 SAR Result Of WCDMA Band II

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	9400/1880	1:1	0.123	0.13	23.74	24.5	1.191	0.147	22.3
Left tilted	RMC	9400/1880	1:1	0.0409	0.07	23.74	24.5	1.191	0.049	22.3
Right cheek	RMC	9400/1880	1:1	0.099	-0.08	23.74	24.5	1.191	0.118	22.3
Right tilted	RMC	9400/1880	1:1	0.0788	0.17	23.74	24.5	1.191	0.094	22.3
Left cheek	RMC	9262/1852.4	1:1	0.122	0.08	23.77	24.5	1.183	0.144	22.3
Left cheek	RMC	9538/1907.6	1:1	0.117	-0.02	23.73	24.5	1.194	0.140	22.3
Head Test Data at the worst case with Battery 2#										
Left cheek	RMC	9400/1880	1:1	0.122	-0.05	23.74	24.5	1.191	0.145	22.3
Head Test Data at the worst case with Battery 3#										
Left cheek	RMC	9400/1880	1:1	0.119	0.08	23.74	24.5	1.191	0.142	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	9400/1880	1:1	0.411	0.09	23.74	24.5	1.191	0.490	22.3
Back side	RMC	9400/1880	1:1	0.408	0.17	23.74	24.5	1.191	0.486	22.3
Front side	RMC	9262/1852.4	1:1	0.373	-0.17	23.77	24.5	1.183	0.441	22.3
Front side	RMC	9538/1907.6	1:1	0.425	0.02	23.73	24.5	1.194	0.507	22.3
Body worn Test Data at the worst case with Battery 2#										
Front side	RMC	9538/1907.6	1:1	0.405	-0.05	23.73	24.5	1.194	0.484	22.3
Body worn Test Data at the worst case with Battery 3#										
Front side	RMC	9538/1907.6	1:1	0.421	-0.14	23.73	24.5	1.194	0.503	22.3
Hotspot Test data(Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.259	0.02	18.74	19.5	1.191	0.309	22.3
Back side	RMC	9400/1880	1:1	0.265	0.08	18.74	19.5	1.191	0.316	22.3
Left side	RMC	9400/1880	1:1	0.098	0.06	18.74	19.5	1.191	0.117	22.3
Right side	RMC	9400/1880	1:1	0.021	0.05	18.74	19.5	1.191	0.025	22.3
Bottom side	RMC	9400/1880	1:1	0.480	0.00	18.74	19.5	1.191	0.572	22.3
Bottom side	RMC	9262/1852.4	1:1	0.422	0.09	18.76	19.5	1.186	0.500	22.3
Bottom side	RMC	9538/1907.6	1:1	0.586	0.13	18.65	19.5	1.216	0.713	22.3
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Bottom side	RMC	9538/1907.6	1:1	0.585	0.11	18.65	19.5	1.216	0.711	22.3
Hotspot Test Data at the worst case with Battery 3#(10mm)										
Bottom side	RMC	9538/1907.6	1:1	0.573	0.01	18.65	19.5	1.216	0.697	22.3
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Limb Test data sensor on(Separate 0mm)										

Bottom side	RMC	9400/1880	1:1	2.61	0	23.24	24	1.191	3.109	22.3
Bottom side	RMC	9262/1852.4	1:1	2.57	0.01	23.18	24	1.208	3.104	22.3
Bottom side	RMC	9538/1907.6	1:1	2.55	0.02	23.09	24	1.233	3.144	22.3
Bottom side Repeat	RMC	9400/1880	1:1	2.58	0.02	23.24	24	1.191	3.073	22.3
Limb Test data sensor off(Separate 9mm)										
Bottom side	RMC	9400/1880	1:1	0.921	0.05	23.74	24.5	1.191	1.097	22.3
Bottom side	RMC	9262/1852.4	1:1	0.805	0.04	23.77	24.5	1.183	0.952	22.3
Bottom side	RMC	9538/1907.6	1:1	1.09	0.07	23.73	24.5	1.194	1.301	22.3
Limb Test data at the worst case with Battery 2#										
Bottom side	RMC	9262/1852.4	1:1	2.53	0.01	23.18	24	1.208	3.056	22.3
Limb Test data at the worst case with Battery 2#										
Bottom side	RMC	9262/1852.4	1:1	2.53	0.02	23.18	24	1.208	3.056	22.3
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left cheek	RMC	9400/1880	1:1	0.39	0.04	18.89	19.5	1.151	0.449	22.3
Left tilted	RMC	9400/1880	1:1	0.536	0.06	18.89	19.5	1.151	0.617	22.3
Right cheek	RMC	9400/1880	1:1	0.426	-0.07	17.41	18	1.146	0.488	22.3
Right tilted	RMC	9400/1880	1:1	0.473	-0.04	17.41	18	1.146	0.542	22.3
Left tilted	RMC	9262/1852.4	1:1	0.319	0.05	18.88	19.5	1.153	0.368	22.3
Left tilted	RMC	9538/1907.6	1:1	0.687	0.14	18.77	19.5	1.183	0.813	22.3
Head Test Data at the worst case with Battery 2#										
Left tilted	RMC	9538/1907.6	1:1	0.675	0.10	18.77	19.5	1.183	0.799	22.3
Head Test Data at the worst case with Battery 3#										
Left tilted	RMC	9538/1907.6	1:1	0.670	0.13	18.77	19.5	1.183	0.793	22.3
Body worn Test data(Separate 15mm)										
Front side	RMC	9400/1880	1:1	0.158	0.16	22.73	23.5	1.194	0.189	22.3
Back side	RMC	9400/1880	1:1	0.214	0.05	22.73	23.5	1.194	0.256	22.3
Back side	RMC	9262/1852.4	1:1	0.183	0.18	22.67	23.5	1.211	0.222	22.3
Back side	RMC	9538/1907.6	1:1	0.284	0.01	22.54	23.5	1.247	0.354	22.3
Body worn Test Data at the worst case with Battery 2#										
Back side	RMC	9538/1907.6	1:1	0.258	0.09	22.54	23.5	1.247	0.322	22.3
Body worn Test Data at the worst case with Battery 3#										
Back side	RMC	9538/1907.6	1:1	0.252	0.01	22.54	23.5	1.247	0.314	22.3
Hotspot activated for WIFI Test data(Separate 10mm)										
Front side	RMC	9400/1880	1:1	0.121	0.05	19.23	20	1.194	0.144	22.3
Back side	RMC	9400/1880	1:1	0.172	0.08	19.23	20	1.194	0.205	22.3
Left side	RMC	9400/1880	1:1	0.103	0.03	19.23	20	1.194	0.123	22.3

Right side	RMC	9400/1880	1:1	0.0275	0.01	19.23	20	1.194	0.033	22.3
Top side	RMC	9400/1880	1:1	0.241	0.09	19.23	20	1.194	0.288	22.3
Top side	RMC	9262/1852.4	1:1	0.218	-0.02	19.22	20	1.197	0.261	22.3
Top side	RMC	9538/1907.6	1:1	0.304	0.01	19.14	20	1.219	0.371	22.3
Hotspot Test Data at the worst case with Battery 2#(10mm)										
Top side	RMC	9538/1907.6	1:1	0.283	0	19.14	20	1.219	0.345	22.1
Hotspot Test Data at the worst case with Battery 3#(10mm)										
Top side	RMC	9538/1907.6	1:1	0.296	0	19.14	20	1.219	0.361	22.1
Ant2 Additional Test data(simultaneous transmission with WIFI)										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data										
Left tilted	RMC	9538/1907.6	1:1	0.322	0.04	15.32	16	1.169	0.377	22.3

Table 26: SAR of WCDMA Band II for Head, Body and Limb (Original report E5/2018/20036)

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg (2.0 W/kg for 10g) then testing at the other channels is not required for such test configuration(s).

Ant1 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case										
Left cheek	RMC	9400/1880	1:1	0.0939	-0.13	23.74	24.5	1.191	0.112	22.3
Head Test data at the worst case with SIM2										
Left cheek	RMC	9400/1880	1:1	0.0918	0.08	23.74	24.5	1.191	0.109	22.3
Body worn Test data at the worst case(Separate 15mm)										
Front side	RMC	9538/1907.6	1:1	0.414	-0.09	23.73	24.5	1.194	0.494	22.3
Body worn Test data at the worst case(Separate 15mm) with SIM2										
Front side	RMC	9538/1907.6	1:1	0.383	0.05	23.73	24.5	1.194	0.457	22.3
Hotspot Test data at the worst case(Separate 10mm)										
Bottom side	RMC	9538/1907.6	1:1	0.534	-0.04	18.65	19.5	1.216	0.649	22.3
Hotspot Test data at the worst case(Separate 10mm) with SIM2										
Bottom side	RMC	9538/1907.6	1:1	0.532	-0.06	18.65	19.5	1.216	0.647	22.3
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Limb Test data sensor on(Separate 0mm)										
Bottom side	RMC	9538/1907.6	1:1	2.81	-0.06	23.09	24	1.233	3.465	22.3
Limb Test data sensor on(Separate 0mm)with SIM2										
Bottom side	RMC	9538/1907.6	1:1	2.73	-0.06	23.09	24	1.233	3.366	22.3
Limb Test data sensor on(Separate 0mm)with SIM2										
Bottom side Repeat	RMC	9538/1907.6	1:1	2.8	-0.05	23.09	24	1.233	3.453	22.3
Ant2 Test data										
Test position	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp
Head Test data at the worst case										
Left tilted	RMC	9538/1907.6	1:1	0.805	0.01	18.77	19.5	1.183	0.952	22.3
Head Test data at the worst case with SIM2										
Left tilted	RMC	9538/1907.6	1:1	0.787	0.01	18.77	19.5	1.183	0.931	22.3
Body worn Test data at the worst case(Separate 15mm)										
Back side	RMC	9538/1907.6	1:1	0.325	0.07	22.54	23.5	1.247	0.405	22.3
Body worn Test data at the worst case(Separate 15mm) with SIM2										
Back side	RMC	9538/1907.6	1:1	0.324	0	22.54	23.5	1.247	0.404	22.3
Hotspot Test data at the worst case(Separate 10mm)										
Top side	RMC	9538/1907.6	1:1	0.424	-0.03	19.14	20	1.219	0.517	22.3
Hotspot Test data at the worst case(Separate 10mm) with SIM2										
Top side	RMC	9538/1907.6	1:1	0.419	-0.08	19.14	20	1.219	0.511	22.3

Table 27: SAR of WCDMA Band II for Head, Body and Limb (Variant)

8.3.6 SAR Result Of LTE Band 2

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_0 offset)											
Left cheek	20	QPSK	18700/1860	1:1	0.111	0.08	23.12	24	1.225	0.136	22.3
Left tilted	20	QPSK	18700/1860	1:1	0.0559	0.01	23.12	24	1.225	0.068	22.3
Right cheek	20	QPSK	18700/1860	1:1	0.0894	0.08	23.12	24	1.225	0.109	22.3
Right tilted	20	QPSK	18700/1860	1:1	0.0606	0.02	23.12	24	1.225	0.074	22.3
Head Test data(50%RB_0 offset)											
Left cheek	20	QPSK	18700/1860	1:1	0.0842	0.05	22.03	23	1.250	0.105	22.3
Left tilted	20	QPSK	18700/1860	1:1	0.0455	0.05	22.03	23	1.250	0.057	22.3
Right cheek	20	QPSK	18700/1860	1:1	0.0683	-0.03	22.03	23	1.250	0.085	22.3
Right tilted	20	QPSK	18700/1860	1:1	0.0455	-0.03	22.03	23	1.250	0.057	22.3
Head Test Data at the worst case with SIM2											
Left cheek	20	QPSK	18700/1860	1:1	0.12	0.06	23.12	24	1.225	0.147	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	20	QPSK	18700/1860	1:1	0.388	0.06	23.12	24	1.225	0.475	22.3
Back side	20	QPSK	18700/1860	1:1	0.363	0.05	23.12	24	1.225	0.445	22.3
Body worn Test data (Separate 15mm 50%RB_50 offset)											
Front side	20	QPSK	18700/1860	1:1	0.301	0.13	22.03	23	1.250	0.376	22.3
Back side	20	QPSK	18700/1860	1:1	0.281	-0.03	22.03	23	1.250	0.351	22.3
Body worn Test Data at the worst case with SIM2											
Front side	20	QPSK	18700/1860	1:1	0.366	-0.07	23.12	24	1.225	0.448	22.3
Hotspot Test data(Separate 10mm 1RB_0 offset)											
Front side	20	QPSK	18700/1860	1:1	0.247	0.01	18.11	19	1.227	0.303	22.3
Back side	20	QPSK	18700/1860	1:1	0.236	0.01	18.11	19	1.227	0.290	22.3
Left side	20	QPSK	18700/1860	1:1	0.0711	-0.08	18.11	19	1.227	0.087	22.3
Right side	20	QPSK	18700/1860	1:1	0.0209	0.04	18.11	19	1.227	0.026	22.3
Bottom side	20	QPSK	18700/1860	1:1	0.5	-0.07	18.11	19	1.227	0.614	22.3
Hotspot Test data (Separate 10mm 50%RB_0 offset)											
Front side	20	QPSK	18700/1860	1:1	0.239	0.16	18.04	19	1.247	0.298	22.3
Back side	20	QPSK	18700/1860	1:1	0.227	0.05	18.04	19	1.247	0.283	22.3
Left side	20	QPSK	18700/1860	1:1	0.0658	-0.07	18.04	19	1.247	0.082	22.3
Right side	20	QPSK	18700/1860	1:1	0.0201	0.04	18.04	19	1.247	0.025	22.3
Bottom side	20	QPSK	18700/1860	1:1	0.511	0.19	18.04	19	1.247	0.637	22.3
Hotspot Test Data at the worst case with SIM2											
Bottom side	20	QPSK	18700/1860	1:1	0.51	0.15	18.04	19	1.247	0.636	22.3

Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Limb Test data-sensor on(Separate 0mm 1RB_0 offset)											
Bottom side	20	QPSK	18700/1860	1:1	2.18	-0.08	21.33	22.5	1.309	2.854	22.3
Bottom side	20	QPSK	18700/1860	1:1	2.09	-0.09	21.26	22.5	1.330	2.781	22.3
Bottom side	20	QPSK	18700/1860	1:1	1.97	-0.06	21.30	22.5	1.318	2.597	22.3
Limb Test data-sensor on(Separate 0mm 50%RB_0 offset)											
Bottom side	20	QPSK	18700/1860	1:1	2.21	-0.02	21.23	22.5	1.340	2.961	22.3
Bottom side	20	QPSK	18700/1860	1:1	2.06	-0.05	21.17	22.5	1.358	2.798	22.3
Bottom side	20	QPSK	18700/1860	1:1	1.96	-0.06	21.21	22.5	1.346	2.638	22.3
Limb Test data-sensor on(Separate 0mm 100%RB_0 offset)											
Bottom side	20	QPSK	18700/1860	1:1	2.17	-0.07	21.19	22.5	1.352	2.934	22.3
Limb Test data-sensor off(Separate 9mm 1RB_0 offset)											
Bottom side	20	QPSK	18700/1860	1:1	0.939	0.06	23.12	24	1.225	1.150	22.3
Limb Test data-sensor off(Separate 9mm 50%RB_0 offset)											
Bottom side	20	QPSK	18700/1860	1:1	0.739	-0.08	22.03	23	1.250	0.924	22.3
Limb Test Data at the worst case with SIM2(Separate 0mm 50%RB_0 offset)											
Bottom side	20	QPSK	18700/1860	1:1	2.2	-0.07	21.23	22.5	1.340	2.947	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_99 offset)											
Left cheek	20	QPSK	18700/1860	1:1	0.33	0.04	18.57	19.5	1.239	0.409	22.3
Left tilted	20	QPSK	18700/1860	1:1	0.524	0.08	18.57	19.5	1.239	0.649	22.3
Right cheek	20	QPSK	18700/1860	1:1	0.363	0.05	17.08	18	1.236	0.449	22.3
Right tilted	20	QPSK	18700/1860	1:1	0.414	-0.11	17.08	18	1.236	0.512	22.3
Head Test data(50%RB_0 offset)											
Left cheek	20	QPSK	18700/1860	1:1	0.347	0.06	18.49	19.5	1.262	0.438	22.3
Left tilted	20	QPSK	18700/1860	1:1	0.486	0.03	18.49	19.5	1.262	0.613	22.3
Right cheek	20	QPSK	18700/1860	1:1	0.382	0.01	17.02	18	1.253	0.479	22.3
Right tilted	20	QPSK	18700/1860	1:1	0.438	0.15	17.02	18	1.253	0.549	22.3
Head Test Data at the worst case with SIM2											
Left tilted	20	QPSK	18700/1860	1:1	0.522	0.08	18.57	19.5	1.239	0.647	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	20	QPSK	18700/1860	1:1	0.155	0.14	22.1	23	1.230	0.191	22.3
Back side	20	QPSK	18700/1860	1:1	0.197	0.01	22.1	23	1.230	0.242	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	20	QPSK	18700/1860	1:1	0.156	0.19	22.01	23	1.256	0.196	22.3
Back side	20	QPSK	18700/1860	1:1	0.202	-0.01	22.01	23	1.256	0.254	22.3
Body worn Test data at the worst case with SIM2											
Back side	20	QPSK	18700/1860	1:1	0.195	-0.07	22.01	23	1.256	0.245	22.3

Hotspot activated for WIFI Test data(Separate 10mm 1RB_0 offset)											
Front side	20	QPSK	18700/1860	1:1	0.133	0.04	19.06	20	1.242	0.165	22.3
Back side	20	QPSK	18700/1860	1:1	0.178	0.02	19.06	20	1.242	0.221	22.3
Left side	20	QPSK	18700/1860	1:1	0.124	0.04	19.06	20	1.242	0.154	22.3
Right side	20	QPSK	18700/1860	1:1	0.0368	-0.05	19.06	20	1.242	0.046	22.3
Top side	20	QPSK	18700/1860	1:1	0.285	-0.07	19.06	20	1.242	0.354	22.3
Hotspot activated for WIFI Test data (Separate 10mm 50%RB_0 offset)											
Front side	20	QPSK	18700/1860	1:1	0.138	0.04	19.03	20	1.250	0.173	22.3
Back side	20	QPSK	18700/1860	1:1	0.181	0.08	19.03	20	1.250	0.226	22.3
Left side	20	QPSK	18700/1860	1:1	0.128	-0.06	19.03	20	1.250	0.160	22.3
Right side	20	QPSK	18700/1860	1:1	0.0391	-0.1	19.03	20	1.250	0.049	22.3
Top side	20	QPSK	18700/1860	1:1	0.295	-0.08	19.03	20	1.250	0.369	22.3
Hotspot Test Data at the worst case with SIM2											
Top side	20	QPSK	18700/1860	1:1	0.299	-0.17	19.03	20	1.250	0.374	22.3
Ant2 Additional Test data(simultaneous transmission with WIFI)											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_99 offset)											
Left tilted	20	QPSK	18700/1860	1:1	0.251	0.02	15.95	16.5	1.135	0.285	22.3

Table 28: SAR of LTE Band 2 for Head, Body and Limb(Variant).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg (2.0 W/kg for 10g) then testing at the other channels is not required for such test configuration(s).

8.3.7 SAR Result Of LTE Band 4

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_0 offset)											
Left cheek	20	QPSK	20175/1732.5	1:1	0.15	-0.07	23.20	24	1.202	0.180	22.3
Left tilted	20	QPSK	20175/1732.5	1:1	0.0536	0.06	23.20	24	1.202	0.064	22.3
Right cheek	20	QPSK	20175/1732.5	1:1	0.109	0.04	23.20	24	1.202	0.131	22.3
Right tilted	20	QPSK	20175/1732.5	1:1	0.0763	0.03	23.20	24	1.202	0.092	22.3
Head Test data(50%RB_0 offset)											
Left cheek	20	QPSK	20175/1732.5	1:1	0.0982	-0.07	21.60	23	1.380	0.136	22.3
Left tilted	20	QPSK	20175/1732.5	1:1	0.0349	-0.01	21.60	23	1.380	0.048	22.3
Right cheek	20	QPSK	20175/1732.5	1:1	0.0744	-0.04	21.60	23	1.380	0.103	22.3
Right tilted	20	QPSK	20175/1732.5	1:1	0.0522	-0.01	21.60	23	1.380	0.072	22.3
Head Test Data at the worst case with SIM2											
Left cheek	20	QPSK	20175/1732.5	1:1	0.143	0.1	23.20	24	1.202	0.172	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	20	QPSK	20175/1732.5	1:1	0.495	-0.04	23.20	24	1.202	0.595	22.3
Back side	20	QPSK	20175/1732.5	1:1	0.326	0.04	23.20	24	1.202	0.392	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	20	QPSK	20175/1732.5	1:1	0.348	-0.04	21.60	23	1.380	0.480	22.3
Back side	20	QPSK	20175/1732.5	1:1	0.229	-0.06	21.60	23	1.380	0.316	22.3
Body worn Test Data at the worst case with SIM2											
Front side	20	QPSK	20175/1732.5	1:1	0.483	-0.16	23.20	24	1.202	0.581	22.3
Hotspot Test data (Separate 10mm 1RB_0 offset)											
Front side	20	QPSK	20175/1732.5	1:1	0.264	-0.06	17.68	18.5	1.208	0.319	22.3
Back side	20	QPSK	20175/1732.5	1:1	0.194	0.08	17.68	18.5	1.208	0.234	22.3
Left side	20	QPSK	20175/1732.5	1:1	0.0692	-0.04	17.68	18.5	1.208	0.084	22.3
Right side	20	QPSK	20175/1732.5	1:1	0.0205	-0.1	17.68	18.5	1.208	0.025	22.3
Bottom side	20	QPSK	20175/1732.5	1:1	0.448	0.08	17.68	18.5	1.208	0.541	22.3
Hotspot Test data (Separate 10mm 50%RB_0 offset)											
Front side	20	QPSK	20175/1732.5	1:1	0.297	-0.02	17.63	18.5	1.222	0.363	22.3
Back side	20	QPSK	20175/1732.5	1:1	0.192	-0.08	17.63	18.5	1.222	0.235	22.3
Left side	20	QPSK	20175/1732.5	1:1	0.0694	-0.15	17.63	18.5	1.222	0.085	22.3
Right side	20	QPSK	20175/1732.5	1:1	0.0206	-0.03	17.63	18.5	1.222	0.025	22.3
Bottom side	20	QPSK	20175/1732.5	1:1	0.449	0.04	17.63	18.5	1.222	0.549	22.3
Hotspot Test Data at the worst case with SIM2											
Bottom side	20	QPSK	20300/1745	1:1	0.4	-0.09	17.63	18.5	1.222	0.489	22.3
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Limbs Test data with sensor on(Separate 0mm 1RB_0 offset)											
Bottom side	20	QPSK	20050/1720	1:1	2.28	0.02	21.07	22	1.239	2.824	22.3

Limbs Test data with sensor on(Separate 0mm 50%RB_0 offset)											
Bottom side	20	QPSK	20050/1720	1:1	2.22	-0.04	21.09	22	1.233	2.737	22.3
Limbs Test data with sensor on(Separate 0mm 100%RB_0 offset)											
Bottom side	20	QPSK	20050/1720	1:1	2.18	0.05	20.97	22	1.268	2.763	22.3
Limbs Test data with sensor off(Separate 9mm 1RB_0 offset)											
Bottom side	20	QPSK	20175/1732.5	1:1	0.811	0.07	23.20	24	1.202	0.975	22.3
Limbs Test data with sensor off(Separate 9mm 50%RB_0 offset)											
Bottom side	20	QPSK	20175/1732.5	1:1	0.577	-0.11	21.60	23	1.380	0.796	22.3
Limb Test Data at the worst case with SIM2 (Separate 0mm)											
Bottom side	20	QPSK	20050/1720	1:1	2.26	0.08	21.07	22	1.239	2.800	22.3
Limb Test Data at the worst case with SIM2 (Separate 0mm)											
Bottom side Repeat	20	QPSK	20050/1720	1:1	2.12	-0.04	21.07	22	1.239	2.626	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB offset)											
Left cheek	20	QPSK	20175/1732.5	1:1	0.396	0.04	20.26	21	1.186	0.470	22.3
Left tilted	20	QPSK	20175/1732.5	1:1	0.556	0.06	20.26	21	1.186	0.659	22.3
Right cheek	20	QPSK	20175/1732.5	1:1	0.566	0.06	18.25	19	1.189	0.673	22.3
Right tilted	20	QPSK	20175/1732.5	1:1	0.557	0.1	18.25	19	1.189	0.662	22.3
Head Test data(50%RB offset)											
Left cheek	20	QPSK	20175/1732.5	1:1	0.4	0.04	20.20	21	1.202	0.481	22.3
Left tilted	20	QPSK	20175/1732.5	1:1	0.554	0.04	20.20	21	1.202	0.666	22.3
Right cheek	20	QPSK	20175/1732.5	1:1	0.572	0.08	18.22	19	1.197	0.685	22.3
Right tilted	20	QPSK	20175/1732.5	1:1	0.558	0.1	18.22	19	1.197	0.668	22.3
Head Test Data at the worst case with SIM2											
Right cheek	20	QPSK	20175/1732.5	1:1	0.567	0.17	18.22	19	1.197	0.679	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	20	QPSK	20175/1732.5	1:1	0.209	-0.03	22.77	23.5	1.183	0.247	22.3
Back side	20	QPSK	20175/1732.5	1:1	0.241	0.07	22.77	23.5	1.183	0.285	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	20	QPSK	20175/1732.5	1:1	0.163	-0.06	21.69	23	1.352	0.220	22.3
Back side	20	QPSK	20175/1732.5	1:1	0.188	0.07	21.69	23	1.352	0.254	22.3
Body worn Test Data at the worst case with SIM2											
Back side	20	QPSK	20175/1732.5	1:1	0.245	0.13	22.77	23.5	1.183	0.290	22.3
Hotspot activated for WIFI Test data(Separate 10mm 1RB_50 offset)											
Front side	20	QPSK	20175/1732.5	1:1	0.148	-0.07	19.79	20.5	1.178	0.174	22.3
Back side	20	QPSK	20175/1732.5	1:1	0.208	0.12	19.79	20.5	1.178	0.245	22.3
Left side	20	QPSK	20175/1732.5	1:1	0.194	0.0952	19.79	20.5	1.178	0.228	22.3
Right side	20	QPSK	20175/1732.5	1:1	0.0207	0.06	19.79	20.5	1.178	0.024	22.3
Top side	20	QPSK	20175/1732.5	1:1	0.274	0.08	19.79	20.5	1.178	0.323	22.3
Hotspot activated for WIFI Test data (Separate 10mm 50%RB_0 offset)											

Front side	20	QPSK	20175/1732.5	1:1	0.146	0.02	19.66	20.5	1.213	0.177	22.3
Back side	20	QPSK	20175/1732.5	1:1	0.205	0.06	19.66	20.5	1.213	0.249	22.3
Left side	20	QPSK	20175/1732.5	1:1	0.189	0.02	19.66	20.5	1.213	0.229	22.3
Right side	20	QPSK	20175/1732.5	1:1	0.0209	0.1	19.66	20.5	1.213	0.025	22.3
Top side	20	QPSK	20175/1732.5	1:1	0.269	0.01	19.66	20.5	1.213	0.326	22.3
Hotspot Test Data at the worst case with SIM2											
Top side	20	QPSK	20175/1732.5	1:1	0.274	0.18	19.66	20.5	1.213	0.332	22.3
Ant2 Additional Test data(simultaneous transmission with WIFI)											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_0 offset)											
Left tilted	20	QPSK	20175/1732.5	1:1	0.269	0.05	17.20	18	1.202	0.323	22.3

Table 29: SAR of LTE Band 4 for Head, Body and Limb(Variant)

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg (2.0 W/kg for 10g) then testing at the other channels is not required for such test configuration(s).

8.3.8 SAR Result Of LTE Band 5

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_0 offset)											
Left cheek	10	QPSK	20450/829	1:1	0.126	0.05	23.31	24	1.172	0.148	22.3
Left tilted	10	QPSK	20450/829	1:1	0.083	0.09	23.31	24	1.172	0.097	22.3
Right cheek	10	QPSK	20450/829	1:1	0.188	-0.04	23.31	24	1.172	0.220	22.3
Right tilted	10	QPSK	20450/829	1:1	0.0992	-0.09	23.31	24	1.172	0.116	22.3
Right cheek	10	QPSK	20525/836.5	1:1	0.173	-0.07	23.29	24	1.178	0.204	22.3
Right cheek	10	QPSK	20600/844	1:1	0.186	0.08	23.25	24	1.189	0.221	22.3
Head Test data(50%RB_0 offset)											
Left cheek	10	QPSK	20450/829	1:1	0.105	0.05	22.25	23	1.189	0.125	22.3
Left tilted	10	QPSK	20450/829	1:1	0.069	0.13	22.25	23	1.189	0.082	22.3
Right cheek	10	QPSK	20450/829	1:1	0.155	-0.01	22.25	23	1.189	0.184	22.3
Right tilted	10	QPSK	20450/829	1:1	0.0821	-0.06	22.25	23	1.189	0.098	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	10	QPSK	20600/844	1:1	0.176	0.07	23.25	24	1.189	0.209	22.3
Head Test Data at the worst case with Battery 3#											
Right cheek	10	QPSK	20600/844	1:1	0.157	0.03	23.25	24	1.189	0.187	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	10	QPSK	20450/829	1:1	0.297	-0.07	23.31	24	1.172	0.348	22.3
Back side	10	QPSK	20450/829	1:1	0.317	0.05	23.31	24	1.172	0.372	22.3
Back side	10	QPSK	20525/836.5	1:1	0.342	0.05	23.29	24	1.178	0.403	22.3
Back side	10	QPSK	20600/844	1:1	0.352	0.07	23.25	24	1.189	0.418	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	10	QPSK	20450/829	1:1	0.241	-0.08	22.25	23	1.189	0.286	22.3
Back side	10	QPSK	20450/829	1:1	0.258	0.05	22.25	23	1.189	0.307	22.3
Body worn Test data at the worst case with Battery 2#											
Back side	10	QPSK	20600/844	1:1	0.278	0.05	23.25	24	1.189	0.330	22.3
Body worn Test data at the worst case with Battery 3#											
Back side	10	QPSK	20600/844	1:1	0.34	0.05	23.25	24	1.189	0.404	22.3
Hotspot Test data(Separate 10mm 1RB_0 offset)											
Front side	10	QPSK	20450/829	1:1	0.441	-0.07	23.31	24	1.172	0.517	22.3
Back side	10	QPSK	20450/829	1:1	0.506	0.06	23.31	24	1.172	0.593	22.3
Left side	10	QPSK	20450/829	1:1	0.0887	-0.08	23.31	24	1.172	0.104	22.3
Right side	10	QPSK	20450/829	1:1	0.321	-0.16	23.31	24	1.172	0.376	22.3
Bottom side	10	QPSK	20450/829	1:1	0.305	-0.08	23.31	24	1.172	0.358	22.3
Back side	10	QPSK	20525/836.5	1:1	0.376	0.07	23.29	24	1.178	0.443	22.3
Back side	10	QPSK	20600/844	1:1	0.468	0.09	23.25	24	1.189	0.556	22.3
Hotspot Test data (Separate 10mm 50%RB_0 offset)											
Front side	10	QPSK	20450/829	1:1	0.358	-0.09	22.25	23	1.189	0.425	22.3

Back side	10	QPSK	20450/829	1:1	0.407	0.05	22.25	23	1.189	0.484	22.3
Left side	10	QPSK	20450/829	1:1	0.0532	-0.15	22.25	23	1.189	0.063	22.3
Right side	10	QPSK	20450/829	1:1	0.187	-0.1	22.25	23	1.189	0.222	22.3
Bottom side	10	QPSK	20450/829	1:1	0.204	-0.04	22.25	23	1.189	0.242	22.3
Hotspot Test data at the worst case with Battery 2#											
Back side	10	QPSK	20450/829	1:1	0.37	0.07	23.31	24	1.172	0.434	22.3
Hotspot Test data at the worst case with Battery 3#											
Back side	10	QPSK	20450/829	1:1	0.462	0.08	23.31	24	1.172	0.542	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB offset)											
Left cheek	10	QPSK	20450/829	1:1	0.643	-0.04	21.08	22	1.236	0.795	22.3
Left tilted	10	QPSK	20450/829	1:1	0.561	0.01	21.08	22	1.236	0.693	22.3
Right cheek	10	QPSK	20525/836.5	1:1	0.511	-0.04	20.68	21.5	1.208	0.617	22.3
Right tilted	10	QPSK	20525/836.5	1:1	0.517	0.02	20.68	21.5	1.208	0.624	22.3
Head Test data(50%RB offset)											
Left cheek	10	QPSK	20450/829	1:1	0.644	0.01	21.07	22	1.239	0.798	22.3
Left tilted	10	QPSK	20450/829	1:1	0.573	0.17	21.07	22	1.239	0.710	22.3
Right cheek	10	QPSK	20450/829	1:1	0.518	-0.08	20.53	21.5	1.250	0.648	22.3
Right tilted	10	QPSK	20450/829	1:1	0.491	0.05	20.53	21.5	1.250	0.614	22.3
Left cheek	10	QPSK	20525/836.5	1:1	0.632	0.05	21.04	22	1.247	0.788	22.3
Left cheek	10	QPSK	20600/844	1:1	0.632	0.02	21.02	22	1.253	0.792	22.3
Head Test Data at the worst case with Battery 2#											
Left cheek	10	QPSK	20450/829	1:1	0.592	0.02	21.07	22	1.239	0.733	22.3
Head Test Data at the worst case with Battery 3#											
Left cheek	10	QPSK	20450/829	1:1	0.601	0.03	21.07	22	1.239	0.745	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	10	QPSK	20450/829	1:1	0.147	0.08	23.14	24	1.219	0.179	22.3
Back side	10	QPSK	20450/829	1:1	0.144	-0.03	23.14	24	1.219	0.176	22.3
Front side	10	QPSK	20525/836.5	1:1	0.16	0.07	23.11	24	1.227	0.196	22.3
Front side	10	QPSK	20600/844	1:1	0.149	0.1	22.89	24	1.291	0.192	22.3
Body worn Test data (Separate 15mm 50%RB_25 offset)											
Front side	10	QPSK	20450/829	1:1	0.108	0.13	22.16	23	1.213	0.131	22.3
Back side	10	QPSK	20450/829	1:1	0.106	0	22.16	23	1.213	0.129	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	10	QPSK	20525/836.5	1:1	0.159	0.07	23.11	24	1.227	0.195	22.3
Body worn Test Data at the worst case with Battery 3#											
Front side	10	QPSK	20525/836.5	1:1	0.147	0.05	23.11	24	1.227	0.180	22.3
Hotspot activated for WIFI Test data(Separate 10mm 1RB_25 offset)											
Front side	10	QPSK	20450/829	1:1	0.134	0.03	20.33	21	1.167	0.156	22.3
Back side	10	QPSK	20450/829	1:1	0.164	-0.01	20.33	21	1.167	0.191	22.3

Left side	10	QPSK	20450/829	1:1	0.0498	0	20.33	21	1.167	0.058	22.3
Right side	10	QPSK	20450/829	1:1	0.0107	0.03	20.33	21	1.167	0.012	22.3
Top side	10	QPSK	20450/829	1:1	0.112	0.04	20.33	21	1.167	0.131	22.3
Hotspot activated for WIFI Test data (Separate 10mm 50%RB_0 offset)											
Front side	10	QPSK	20450/829	1:1	0.147	0.17	20.01	21	1.256	0.185	22.3
Back side	10	QPSK	20450/829	1:1	0.173	-0.09	20.01	21	1.256	0.217	22.3
Left side	10	QPSK	20450/829	1:1	0.0525	-0.01	20.01	21	1.256	0.066	22.3
Right side	10	QPSK	20450/829	1:1	0.0101	0.04	20.01	21	1.256	0.013	22.3
Top side	10	QPSK	20450/829	1:1	0.119	0.09	20.01	21	1.256	0.149	22.3
Back side	10	QPSK	20525/836.5	1:1	0.162	-0.08	19.95	21	1.274	0.206	22.3
Back side	10	QPSK	20600/844	1:1	0.154	-0.13	19.89	21	1.291	0.199	22.3
Hotspot Test Data at the worst case with Battery 2#											
Back side	10	QPSK	20450/829	1:1	0.138	-0.13	20.01	21	1.256	0.173	22.3
Hotspot Test Data at the worst case with Battery 3#											
Back side	10	QPSK	20450/829	1:1	0.153	-0.1	20.01	21	1.256	0.192	22.3
Ant2 Additional Test data(simultaneous transmission with WIFI)											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_0 offset)											
Left tilted	10	QPSK	20450/829	1:1	0.225	0.09	17.63	19	1.371	0.308	22.3

Table 30: SAR of LTE Band 5 for Head and Body (Original report E5/2018/20036)

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(1RB_0 offset)											
Right cheek	10	QPSK	20600/844	1:1	0.21	0.02	23.25	24	1.189	0.250	22.3
Head Test data at the Worst Case(1RB_0 offset) with SIM2											
Right cheek	10	QPSK	20600/844	1:1	0.227	0.19	23.25	24	1.189	0.270	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_0 offset)											
Back side	10	QPSK	20600/844	1:1	0.377	-0.01	23.25	24	1.189	0.448	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_0 offset) with SIM2											
Back side	10	QPSK	20600/844	1:1	0.371	0.02	23.25	24	1.189	0.441	22.3
Hotspot Test data at the Worst Case(Separate 10mm 1RB_0 offset)											
Back side	10	QPSK	20450/829	1:1	0.537	0.04	23.31	24	1.172	0.629	22.3
Hotspot Test data at the Worst Case(Separate 10mm 1RB_0 offset) with SIM2											
Back side	10	QPSK	20450/829	1:1	0.524	0.03	23.31	24	1.172	0.614	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(50%RB offset)											
Left cheek	10	QPSK	20450/829	1:1	0.57	0.04	21.07	22	1.239	0.706	22.3
Head Test data at the Worst Case(50%RB offset) with SIM2											
Left cheek	10	QPSK	20450/829	1:1	0.544	0.03	21.07	22	1.239	0.674	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_0 offset)											
Front side	10	QPSK	20525/836.5	1:1	0.162	-0.04	23.11	24	1.227	0.199	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_0 offset) with SIM2											
Front side	10	QPSK	20525/836.5	1:1	0.161	0.02	23.11	24	1.227	0.198	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm 50%RB_0 offset)											
Back side	10	QPSK	20450/829	1:1	0.161	0.01	20.01	21	1.256	0.202	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm 50%RB_0 offset) with SIM2											
Back side	10	QPSK	20450/829	1:1	0.158	0.02	20.01	21	1.256	0.198	22.3

Table 31: SAR of LTE Band 5 for Head and Body (Variant)

8.3.9 SAR Result Of LTE Band 7

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_99 offset)											
Left cheek	20	QPSK	21350/2560	1:1	0.072	0.05	22.94	23.6	1.164	0.084	22.3
Left tilted	20	QPSK	21350/2560	1:1	0.049	0.08	22.94	23.6	1.164	0.057	22.3
Right cheek	20	QPSK	21350/2560	1:1	0.107	0.07	22.94	23.6	1.164	0.125	22.3
Right tilted	20	QPSK	21350/2560	1:1	0.081	0.02	22.94	23.6	1.164	0.094	22.3
Head Test data(50%RB_50 offset)											
Left cheek	20	QPSK	21350/2560	1:1	0.048	0.01	21.29	22.6	1.352	0.065	22.3
Left tilted	20	QPSK	21350/2560	1:1	0.034	0.09	21.29	22.6	1.352	0.046	22.3
Right cheek	20	QPSK	21350/2560	1:1	0.075	0.04	21.29	22.6	1.352	0.102	22.3
Right tilted	20	QPSK	21350/2560	1:1	0.055	0.2	21.29	22.6	1.352	0.074	22.3
Head Test Data at the worst case with SIM2											
Right cheek	20	QPSK	21350/2560	1:1	0.120	-0.03	22.94	23.6	1.164	0.140	22.3
Body worn Test data(Separate 15mm 1RB_99 offset)											
Front side	20	QPSK	21350/2560	1:1	0.37	0.13	22.94	23.6	1.164	0.431	22.3
Back side	20	QPSK	21350/2560	1:1	0.346	0.08	22.94	23.6	1.164	0.403	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	20	QPSK	21350/2560	1:1	0.266	0.06	21.29	22.6	1.352	0.360	22.3
Back side	20	QPSK	21350/2560	1:1	0.249	0.01	21.29	22.6	1.352	0.337	22.3
Body worn Test data at the worst case With SIM2											
Front side	20	QPSK	21350/2560	1:1	0.363	-0.01	22.94	23.6	1.164	0.423	22.3
Hotspot Test data(Separate 10mm 1RB_99 offset)											
Front side	20	QPSK	21350/2560	1:1	0.276	0.17	18.9	19.6	1.175	0.324	22.3
Back side	20	QPSK	21350/2560	1:1	0.263	-0.07	18.9	19.6	1.175	0.309	22.3
Left side	20	QPSK	21350/2560	1:1	0.111	-0.01	18.9	19.6	1.175	0.130	22.3
Right side	20	QPSK	21350/2560	1:1	0.084	0.1	18.9	19.6	1.175	0.099	22.3
Bottom side	20	QPSK	21350/2560	1:1	0.535	0.18	18.9	19.6	1.175	0.629	22.3
Hotspot Test data (Separate 10mm 50%RB_50 offset)											
Front side	20	QPSK	21350/2560	1:1	0.278	0.04	18.83	19.6	1.194	0.332	22.3
Back side	20	QPSK	21350/2560	1:1	0.264	0.12	18.83	19.6	1.194	0.315	22.3
Left side	20	QPSK	21350/2560	1:1	0.11	0.05	18.83	19.6	1.194	0.131	22.3
Right side	20	QPSK	21350/2560	1:1	0.0835	-0.02	18.83	19.6	1.194	0.100	22.3
Bottom side	20	QPSK	21350/2560	1:1	0.55	0.02	18.83	19.6	1.194	0.657	22.3
Hotspot Test Data at the worst case with SIM2											
Bottom side	20	QPSK	21350/2560	1:1	0.6	0.1	18.83	19.6	1.194	0.716	22.3
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)10-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Limbs Test Data with sensor on (1RB_99 offset)											
Bottom side-0mm	20	QPSK	21350/2560	1:1	0.785	-0.18	20.23	20.6	1.089	0.855	22.3

Bottom side-3mm	20	QPSK	21350/2560	1:1	1.68	0.03	22.11	22.6	1.119	1.881	22.3
Limbs Test Data with sensor on (50RB_50 offset)											
Bottom side-0mm	20	QPSK	21350/2560	1:1	0.779	0.09	20.09	20.6	1.125	0.876	22.3
Bottom side-3mm	20	QPSK	21350/2560	1:1	1.48	0.04	21.52	22.6	1.282	1.898	22.3
Limbs Test Data with sensor off (Separate 9mm 1RB_99 offset)											
Bottom side	20	QPSK	21350/2560	1:1	0.758	0.1	22.94	23.6	1.164	0.882	22.3
Limbs Test data with sensor off (Separate 9mm 50RB_50 offset)											
Bottom side	20	QPSK	21350/2560	1:1	0.525	-0.01	21.29	22.6	1.352	0.710	22.3
Limbs Test Data at the worst case with SIM2											
Bottom side-3mm	20	QPSK	21350/2560	1:1	1.45	0.09	21.52	22.6	1.282	1.859	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_99 offset)											
Left cheek	20	QPSK	21350/2560	1:1	0.413	0.02	15.51	16.1	1.146	0.473	22.3
Left tilted	20	QPSK	21350/2560	1:1	0.431	-0.12	15.51	16.1	1.146	0.494	22.3
Right cheek	20	QPSK	21350/2560	1:1	0.443	0.12	11.97	12.6	1.156	0.512	22.3
Right tilted	20	QPSK	21350/2560	1:1	0.394	0.13	11.97	12.6	1.156	0.456	22.3
Head Test data(50%RB_50 offset)											
Left cheek	20	QPSK	21350/2560	1:1	0.423	0.11	15.37	16.1	1.183	0.500	22.3
Left tilted	20	QPSK	21350/2560	1:1	0.448	0.07	15.37	16.1	1.183	0.530	22.3
Right cheek	20	QPSK	21350/2560	1:1	0.45	0.16	11.86	12.6	1.186	0.534	22.3
Right tilted	20	QPSK	21350/2560	1:1	0.397	0.07	11.86	12.6	1.186	0.471	22.3
Head Test Data at the worst case with SIM2											
Right cheek	20	QPSK	21350/2560	1:1	0.442	0.18	11.86	12.6	1.186	0.524	22.3
Body worn Test data(Separate 15mm 1RB_99 offset)											
Front side	20	QPSK	21100/2535.5	1:1	0.115	0.15	19.5	20.1	1.148	0.132	22.3
Back side	20	QPSK	21100/2535.5	1:1	0.137	-0.08	19.5	20.1	1.148	0.157	22.3
Body worn Test data (Separate 15mm 50%RB_50 offset)											
Front side	20	QPSK	21100/2535.5	1:1	0.116	0.02	19.39	20.1	1.178	0.137	22.3
Back side	20	QPSK	21100/2535.5	1:1	0.142	0.07	19.39	20.1	1.178	0.167	22.3
Body worn Test data at the worst case with (Separate 50%RB_50 offset) With SIM2											
Back side	20	QPSK	21100/2535.5	1:1	0.153	-0.09	19.5	20.1	1.148	0.176	22.3
Hotspot activated for WIFI Test data (Separate 10mm 1RB_99 offset)											
Front side	20	QPSK	20850/2510	1:1	0.285	0.04	17.99	18.6	1.151	0.328	22.3
Back side	20	QPSK	20850/2510	1:1	0.327	-0.02	17.99	18.6	1.151	0.376	22.3
Left side	20	QPSK	20850/2510	1:1	0.0887	-0.03	17.99	18.6	1.151	0.102	22.3
Right side	20	QPSK	20850/2510	1:1	0.0199	-0.13	17.99	18.6	1.151	0.023	22.3
Top side	20	QPSK	20850/2510	1:1	0.345	0.02	17.99	18.6	1.151	0.397	22.3
Hotspot activated for WIFI Test data (Separate 10mm 50%RB_50 offset)											
Front side	20	QPSK	20850/2510	1:1	0.285	0.03	17.87	18.6	1.183	0.337	22.3
Back side	20	QPSK	20850/2510	1:1	0.338	0.08	17.87	18.6	1.183	0.400	22.3

Left side	20	QPSK	20850/2510	1:1	0.0912	-0.13	17.87	18.6	1.183	0.108	22.3
Right side	20	QPSK	20850/2510	1:1	0.0199	0.07	17.87	18.6	1.183	0.024	22.3
Top side	20	QPSK	20850/2510	1:1	0.36	0.18	17.87	18.6	1.183	0.426	22.3
Hotspot Test Data at the worst case with SIM2											
Top side	20	QPSK	20850/2510	1:1	0.374	0.09	17.87	18.6	1.183	0.442	22.3
Ant2 Additional Test data(simultaneous transmission with WIFI)											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Left tilted	20	QPSK	21350/2560	1:1	0.204	-0.01	14.51	14.6	1.021	0.208	22.3

Table 32: SAR of LTE Band 7 for Head, Body and Limb(Variant).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg (2.0 W/kg for 10g) then testing at the other channels is not required for such test configuration(s).

8.3.10 SAR Result Of LTE Band 12

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_0 offset)											
Left cheek	10	QPSK	23060/704	1:1	0.115	0.07	23.66	24	1.081	0.124	22.3
Left tilted	10	QPSK	23060/704	1:1	0.0761	-0.16	23.66	24	1.081	0.082	22.3
Right cheek	10	QPSK	23060/704	1:1	0.147	-0.17	23.66	24	1.081	0.159	22.3
Right tilted	10	QPSK	23060/704	1:1	0.0681	0.03	23.66	24	1.081	0.074	22.3
Right cheek	10	QPSK	23095/707.5	1:1	0.159	0.07	23.62	24	1.091	0.174	22.3
Right cheek	10	QPSK	23130/711	1:1	0.158	0.11	23.62	24	1.091	0.172	22.3
Head Test data(50%RB_0 offset)											
Left cheek	10	QPSK	23060/704	1:1	0.0965	-0.06	22.51	23	1.119	0.108	22.3
Left tilted	10	QPSK	23060/704	1:1	0.0616	-0.09	22.51	23	1.119	0.069	22.3
Right cheek	10	QPSK	23060/704	1:1	0.114	-0.03	22.51	23	1.119	0.128	22.3
Right tilted	10	QPSK	23060/704	1:1	0.0508	-0.06	22.51	23	1.119	0.057	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	10	QPSK	23095/707.5	1:1	0.147	0.03	23.62	24	1.091	0.160	22.3
Head Test Data at the worst case with Battery 3#											
Right cheek	10	QPSK	23095/707.5	1:1	0.148	0.17	23.62	24	1.091	0.162	22.3
Body worn Test data(Separate 15mm 1RB_49 offset)											
Front side	10	QPSK	23060/704	1:1	0.242	-0.17	23.66	24	1.081	0.262	22.3
Back side	10	QPSK	23060/704	1:1	0.249	-0.04	23.66	24	1.081	0.269	22.3
Back side	10	QPSK	23095/707.5	1:1	0.256	0.16	23.62	24	1.091	0.279	22.3
Back side	10	QPSK	23130/711	1:1	0.257	0.16	23.62	24	1.091	0.281	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	10	QPSK	23060/704	1:1	0.201	0.05	22.51	23	1.119	0.225	22.3
Back side	10	QPSK	23060/704	1:1	0.21	0.08	22.51	23	1.119	0.235	22.3
Body worn Data at the worst case with Battery 2#											
Back side	10	QPSK	23130/711	1:1	0.247	-0.05	23.62	24	1.091	0.270	22.3
Body worn Data at the worst case with Battery 3#											
Back side	10	QPSK	23130/711	1:1	0.24	-0.01	23.62	24	1.091	0.262	22.3
Hotspot Test data(Separate 10mm 1RB_49 offset)											
Front side	10	QPSK	23060/704	1:1	0.31	-0.04	23.66	24	1.081	0.335	22.3
Back side	10	QPSK	23060/704	1:1	0.345	-0.08	23.66	24	1.081	0.373	22.3
Left side	10	QPSK	23060/704	1:1	0.0992	-0.11	23.66	24	1.081	0.107	22.3
Right side	10	QPSK	23060/704	1:1	0.268	-0.09	23.66	24	1.081	0.290	22.3
Bottom side	10	QPSK	23060/704	1:1	0.205	-0.09	23.66	24	1.081	0.222	22.3
Back side	10	QPSK	23095/707.5	1:1	0.344	0.05	23.62	24	1.091	0.375	22.3
Back side	10	QPSK	23130/711	1:1	0.329	-0.1	23.62	24	1.091	0.359	22.3
Hotspot Test data (Separate 10mm 50%RB_0 offset)											
Front side	10	QPSK	23060/704	1:1	0.266	0.04	22.51	23	1.119	0.298	22.3
Back side	10	QPSK	23060/704	1:1	0.295	-0.02	22.51	23	1.119	0.330	22.3
Left side	10	QPSK	23060/704	1:1	0.0861	-0.03	22.51	23	1.119	0.096	22.3

Right side	10	QPSK	23060/704	1:1	0.22	-0.01	22.51	23	1.119	0.246	22.3
Bottom side	10	QPSK	23060/704	1:1	0.174	-0.06	22.51	23	1.119	0.195	22.3
Hotspot Test Data at the worst case with Battery 2#											
Back side	10	QPSK	23095/707.5	1:1	0.332	-0.01	23.62	24	1.091	0.362	22.3
Hotspot Test Data at the worst case with Battery 3#											
Back side	10	QPSK	23095/707.5	1:1	0.317	-0.02	23.62	24	1.091	0.346	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB offset)											
Left cheek	10	QPSK	23130/711	1:1	0.842	0	21.97	22.4	1.104	0.930	22.3
Left tilted	10	QPSK	23130/711	1:1	0.683	0.03	21.97	22.4	1.104	0.754	22.3
Right cheek	10	QPSK	23130/711	1:1	0.699	0.08	21.4	22	1.148	0.803	22.3
Right tilted	10	QPSK	23130/711	1:1	0.736	-0.02	21.4	22	1.148	0.845	22.3
Left cheek	10	QPSK	23060/704	1:1	0.808	0.05	21.72	22.4	1.169	0.945	22.3
Left cheek	10	QPSK	23095/707.5	1:1	0.862	0.01	21.85	22.4	1.135	0.978	22.3
Right cheek	10	QPSK	23060/704	1:1	0.709	0.1	21.17	22	1.211	0.858	22.3
Right cheek	10	QPSK	23095/707.5	1:1	0.659	0.09	21.31	22	1.172	0.772	22.3
Right tilted	10	QPSK	23060/704	1:1	0.7	0.05	21.17	22	1.211	0.847	22.3
Right tilted	10	QPSK	23095/707.5	1:1	0.749	0	21.31	22	1.172	0.878	22.3
Head Test data(50%RB offset)											
Left cheek	10	QPSK	23060/704	1:1	0.757	0.03	21.86	22.4	1.132	0.857	22.3
Left tilted	10	QPSK	23060/704	1:1	0.662	0.03	21.86	22.4	1.132	0.750	22.3
Right cheek	10	QPSK	23130/711	1:1	0.689	-0.04	21.33	22	1.167	0.804	22.3
Right tilted	10	QPSK	23130/711	1:1	0.687	0.19	21.33	22	1.167	0.802	22.3
Left cheek	10	QPSK	23095/707.5	1:1	0.81	0.06	21.72	22.4	1.169	0.947	22.3
Left cheek	10	QPSK	23130/711	1:1	0.841	0.03	21.76	22.4	1.159	0.975	22.3
Right cheek	10	QPSK	23060/704	1:1	0.549	0.01	21.31	22	1.172	0.644	22.3
Right cheek	10	QPSK	23095/707.5	1:1	0.613	-0.07	21.21	22	1.199	0.735	22.3
Right tilted	10	QPSK	23060/704	1:1	0.589	0.16	21.31	22	1.172	0.690	22.3
Right tilted	10	QPSK	23095/707.5	1:1	0.648	-0.01	21.21	22	1.199	0.777	22.3
Head Test data(100%RB offset)											
Left cheek	10	QPSK	23060/704	1:1	0.785	0.01	21.88	22.4	1.127	0.885	22.3
Right cheek	10	QPSK	23060/704	1:1	0.744	0.06	21.4	22	1.148	0.854	22.3
Right tilted	10	QPSK	23060/704	1:1	0.773	0.07	21.4	22	1.148	0.888	22.3
Head Test Data at the worst case with Battery 2#											
Left cheek	10	QPSK	23095/707.5	1:1	0.878	0.04	21.85	22.4	1.135	0.997	22.3
Head Test Data at the worst case with Battery 3#											
Left cheek	10	QPSK	23095/707.5	1:1	0.907	-0.06	21.85	22.4	1.135	1.029	22.3
Left cheek-repeat	10	QPSK	23095/707.5	1:1	0.891	0.04	21.85	22.4	1.135	1.011	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	10	QPSK	23130/711	1:1	0.215	-0.11	23.34	24	1.164	0.250	22.3
Back side	10	QPSK	23130/711	1:1	0.188	-0.04	23.34	24	1.164	0.219	22.3

Front side	10	QPSK	23060/704	1:1	0.159	-0.02	23.02	24	1.253	0.199	22.3
Front side	10	QPSK	23095/707.5	1:1	0.179	0	23.32	24	1.169	0.209	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	10	QPSK	23130/711	1:1	0.166	0	22.32	23	1.169	0.194	22.3
Back side	10	QPSK	23130/711	1:1	0.144	0.08	22.32	23	1.169	0.168	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	10	QPSK	23130/711	1:1	0.194	-0.03	23.34	24	1.164	0.226	22.3
Body worn Test Data at the worst case with Battery 3#											
Front side	10	QPSK	23130/711	1:1	0.207	0.06	23.34	24	1.164	0.241	22.3
Hotspot activated for WIFI Test data(Separate 10mm 1RB_0 offset)											
Front side	10	QPSK	23095/707.5	1:1	0.16	0.03	20.4	21	1.148	0.184	22.3
Back side	10	QPSK	23095/707.5	1:1	0.157	0.02	20.4	21	1.148	0.180	22.3
Left side	10	QPSK	23095/707.5	1:1	0.0792	0.04	20.4	21	1.148	0.091	22.3
Right side	10	QPSK	23095/707.5	1:1	0.0438	0.02	20.4	21	1.148	0.050	22.3
Top side	10	QPSK	23095/707.5	1:1	0.114	-0.02	20.4	21	1.148	0.131	22.3
Hotspot activated for WIFI Test data (Separate 10mm 50%RB_0 offset)											
Front side	10	QPSK	23060/704	1:1	0.173	-0.02	20.38	21	1.153	0.200	22.3
Back side	10	QPSK	23060/704	1:1	0.146	0.01	20.38	21	1.153	0.168	22.3
Left side	10	QPSK	23060/704	1:1	0.0686	-0.02	20.38	21	1.153	0.079	22.3
Right side	10	QPSK	23060/704	1:1	0.0414	0.02	20.38	21	1.153	0.048	22.3
Top side	10	QPSK	23060/704	1:1	0.108	0.01	20.38	21	1.153	0.125	22.3
Front side	10	QPSK	23095/707.5	1:1	0.205	0.03	20.27	21	1.183	0.243	22.3
Front side	10	QPSK	23130/711	1:1	0.219	0.06	20.25	21	1.189	0.260	22.3
Hotspot Test Data at the worst case with Battery 2#											
Front side	10	QPSK	23130/711	1:1	0.216	0.04	20.25	21	1.189	0.257	22.3
Hotspot Test Data at the worst case with Battery 3#											
Front side	10	QPSK	23130/711	1:1	0.202	0	20.25	21	1.189	0.240	22.3
Ant2 Additional Test data(simultaneous transmission with WIFI)											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_49 offset)											
Left cheek	10	QPSK	23095/707.5	1:1	0.4	0.06	18.53	19.4	1.222	0.489	22.3
Left tilted	10	QPSK	23095/707.5	1:1	0.34	0.08	18.53	19.4	1.222	0.415	22.3
Right cheek	10	QPSK	23095/707.5	1:1	0.347	-0.03	18	19	1.259	0.437	22.3
Right tilted	10	QPSK	23095/707.5	1:1	0.349	0.07	18	19	1.259	0.439	22.3

Table 33: SAR of LTE Band 12 for Head and Body (Original report E5/2018/20036).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(1RB_0 offset)											
Right cheek	10	QPSK	23095/707.5	1:1	0.137	0.07	23.62	24	1.091	0.150	22.3
Head Test data at the Worst Case(1RB_0 offset) with SIM2											
Right cheek	10	QPSK	23095/707.5	1:1	0.133	0.02	23.62	24	1.091	0.145	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_49 offset)											
Back side	10	QPSK	23130/711	1:1	0.17	-0.08	23.62	24	1.091	0.186	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_49 offset) with SIM2											
Back side	10	QPSK	23130/711	1:1	0.283	0.03	23.62	24	1.091	0.309	22.3
Hotspot Test data at the Worst Case(Separate 10mm 1RB_49 offset)											
Back side	10	QPSK	23095/707.5	1:1	0.389	0.05	23.62	24	1.091	0.425	22.3
Hotspot Test data at the Worst Case(Separate 10mm 1RB_49 offset) with SIM2											
Back side	10	QPSK	23095/707.5	1:1	0.389	-0.03	23.62	24	1.091	0.425	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(1RB offset)											
Left cheek	10	QPSK	23095/707.5	1:1	0.748	-0.05	21.85	22.4	1.135	0.849	22.3
Head Test data at the Worst Case(1RB offset) with SIM2											
Left cheek	10	QPSK	23095/707.5	1:1	0.739	0.01	21.85	22.4	1.135	0.839	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_0 offset)											
Front side	10	QPSK	23130/711	1:1	0.152	0.06	23.34	24	1.164	0.177	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_0 offset) with SIM2											
Front side	10	QPSK	23130/711	1:1	0.151	0.04	23.34	24	1.164	0.176	22.3
Hotspot actived for WIFI Test data at the Worst Case(Separate 10mm 50%RB_0 offset)											
Front side	10	QPSK	23130/711	1:1	0.177	0.08	20.25	21	1.189	0.210	22.3
Hotspot actived for WIFI Test data at the Worst Case(Separate 10mm 50%RB_0 offset) with SIM2											
Front side	10	QPSK	23130/711	1:1	0.175	0.09	20.25	21	1.189	0.208	22.3

Table 34: SAR of LTE Band 12 for Head and Body (Variant)

8.3.11 SAR Result Of LTE Band 17

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_49 offset)											
Left cheek	10	QPSK	23780/709	1:1	0.123	0.01	23.66	24	1.081	0.133	22.3
Left tilted	10	QPSK	23780/709	1:1	0.0732	0.16	23.66	24	1.081	0.079	22.3
Right cheek	10	QPSK	23780/709	1:1	0.149	0.05	23.66	24	1.081	0.161	22.3
Right tilted	10	QPSK	23780/709	1:1	0.0683	0.16	23.66	24	1.081	0.074	22.3
Right cheek	10	QPSK	23790/710	1:1	0.142	0.13	23.54	24	1.112	0.158	22.3
Right cheek	10	QPSK	23800/711	1:1	0.141	0.01	23.56	24	1.107	0.156	22.3
Head Test data(50%RB_25 offset)											
Left cheek	10	QPSK	23780/709	1:1	0.0999	-0.02	22.19	23	1.205	0.120	22.3
Left tilted	10	QPSK	23780/709	1:1	0.0627	0.11	22.19	23	1.205	0.076	22.3
Right cheek	10	QPSK	23780/709	1:1	0.119	-0.02	22.19	23	1.205	0.143	22.3
Right tilted	10	QPSK	23780/709	1:1	0.0572	-0.01	22.19	23	1.205	0.069	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	10	QPSK	23780/709	1:1	0.143	0.03	23.66	24	1.081	0.155	22.3
Head Test Data at the worst case with Battery 3#											
Right cheek	10	QPSK	23780/709	1:1	0.148	0.03	23.66	24	1.081	0.160	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	10	QPSK	23780/709	1:1	0.24	-0.02	23.66	24	1.081	0.260	22.3
Back side	10	QPSK	23780/709	1:1	0.251	-0.08	23.66	24	1.081	0.271	22.3
Back side	10	QPSK	23790/710	1:1	0.25	-0.13	23.54	24	1.112	0.278	22.3
Back side	10	QPSK	23800/711	1:1	0.247	-0.12	23.56	24	1.107	0.273	22.3
Body worn Test data (Separate 15mm 50%RB_25 offset)											
Front side	10	QPSK	23780/709	1:1	0.178	0.08	22.19	23	1.205	0.214	22.3
Back side	10	QPSK	23780/709	1:1	0.186	0.09	22.19	23	1.205	0.224	22.3
Body worn Test Data at the worst case with Battery 2#											
Back side	10	QPSK	23790/710	1:1	0.241	-0.03	23.54	24	1.112	0.268	22.3
Body worn Test Data at the worst case with Battery 3#											
Back side	10	QPSK	23790/710	1:1	0.234	-0.07	23.54	24	1.112	0.26	22.3
Hotspot Test data(Separate 10mm 1RB_0 offset)											
Front side	10	QPSK	23780/709	1:1	0.317	-0.12	23.66	24	1.081	0.343	22.3
Back side	10	QPSK	23780/709	1:1	0.35	-0.06	23.66	24	1.081	0.379	22.3
Left side	10	QPSK	23780/709	1:1	0.102	-0.08	23.66	24	1.081	0.110	22.3
Right side	10	QPSK	23780/709	1:1	0.255	-0.05	23.66	24	1.081	0.276	22.3
Bottom side	10	QPSK	23780/709	1:1	0.208	-0.07	23.66	24	1.081	0.225	22.3
Back side	10	QPSK	23790/710	1:1	0.347	-0.09	23.54	24	1.112	0.386	22.3
Back side	10	QPSK	23800/711	1:1	0.336	-0.19	23.56	24	1.107	0.372	22.3
Hotspot Test data (Separate 10mm 50%RB_25 offset)											
Front side	10	QPSK	23780/709	1:1	0.231	0.03	22.19	23	1.205	0.278	22.3
Back side	10	QPSK	23780/709	1:1	0.256	0.1	22.19	23	1.205	0.308	22.3

Left side	10	QPSK	23780/709	1:1	0.0723	0.04	22.19	23	1.205	0.087	22.3
Right side	10	QPSK	23780/709	1:1	0.195	0.03	22.19	23	1.205	0.235	22.3
Bottom side	10	QPSK	23780/709	1:1	0.152	-0.04	22.19	23	1.205	0.183	22.3
Hotspot Test Data at the worst case with Battery 2#											
Back side	10	QPSK	23790/710	1:1	0.32	-0.01	23.54	24	1.112	0.356	22.3
Hotspot Test Data at the worst case with Battery 3#											
Back side	10	QPSK	23790/710	1:1	0.324	-0.02	23.54	24	1.112	0.360	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB offset)											
Left cheek	10	QPSK	23800/711	1:1	0.802	0	21.87	22.3	1.104	0.885	22.3
Left tilted	10	QPSK	23800/712	1:1	0.78	-0.13	21.87	22.3	1.104	0.861	22.3
Right cheek	10	QPSK	23800/711	1:1	0.604	-0.01	20.77	21.5	1.183	0.715	22.3
Right tilted	10	QPSK	23800/711	1:1	0.683	0.04	20.77	21.5	1.183	0.808	22.3
Left cheek	10	QPSK	23780/709	1:1	0.823	0	21.69	22.3	1.151	0.947	22.3
Left cheek	10	QPSK	23790/710	1:1	0.828	0.04	21.66	22.3	1.159	0.959	22.3
Left tilted	10	QPSK	23780/709	1:1	0.732	0.12	21.69	22.3	1.151	0.842	22.3
Left tilted	10	QPSK	23790/710	1:1	0.738	0.04	21.66	22.3	1.159	0.855	22.3
Right tilted	10	QPSK	23780/709	1:1	0.676	0.11	20.75	21.5	1.189	0.803	22.3
Right tilted	10	QPSK	23790/710	1:1	0.682	0.06	20.54	21.5	1.247	0.851	22.3
Head Test data(50%RB offset)											
Left cheek	10	QPSK	23790/710	1:1	0.834	0.08	21.76	22.3	1.132	0.944	22.3
Left tilted	10	QPSK	23790/710	1:1	0.707	0.06	21.76	22.3	1.132	0.801	22.3
Right cheek	10	QPSK	23780/709	1:1	0.526	0.02	20.73	21.5	1.194	0.628	22.3
Right tilted	10	QPSK	23780/709	1:1	0.627	-0.04	20.73	21.5	1.194	0.749	22.3
Left cheek	10	QPSK	23780/709	1:1	0.829	0	21.69	22.3	1.151	0.954	22.3
Left cheek	10	QPSK	23800/711	1:1	0.839	0.05	21.66	22.3	1.159	0.972	22.3
Left tilted	10	QPSK	23780/709	1:1	0.668	-0.01	21.69	22.3	1.151	0.769	22.3
Left tilted	10	QPSK	23800/711	1:1	0.692	0.02	21.66	22.3	1.159	0.802	22.3
Head Test data(100%RB offset)											
Left cheek	10	QPSK	23790/710	1:1	0.846	0.07	21.74	22.3	1.138	0.962	22.3
Left tilted	10	QPSK	23790/710	1:1	0.732	0.04	21.74	22.3	1.138	0.833	22.3
Right tilted	10	QPSK	23800/711	1:1	0.679	0.12	20.72	21.5	1.197	0.813	22.3
Head Test Data at the worst case with Battery 2#											
Left cheek	10	QPSK	23800/711	1:1	0.845	0.01	21.66	22.3	1.159	0.979	22.3
Head Test Data at the worst case with Battery 3#											
Left cheek	10	QPSK	23800/711	1:1	0.855	0.13	21.66	22.3	1.159	0.991	22.3
Left cheek-repeat	10	QPSK	23800/711	1:1	0.824	0.07	21.66	22.3	1.159	0.955	22.3
Body worn Test data(Separate 15mm 1RB_25 offset)											
Front side	10	QPSK	23790/710	1:1	0.199	-0.05	23.45	24	1.135	0.226	22.3
Back side	10	QPSK	23790/710	1:1	0.174	-0.01	23.45	24	1.135	0.197	22.3
Front side	10	QPSK	23780/709	1:1	0.19	-0.01	23.2	24	1.202	0.228	22.3

Front side	10	QPSK	23800/711	1:1	0.198	0.01	23.18	24	1.208	0.239	22.3
Body worn Test data (Separate 15mm 50%RB_25 offset)											
Front side	10	QPSK	23790/710	1:1	0.159	0.04	21.93	23	1.279	0.203	22.3
Back side	10	QPSK	23790/710	1:1	0.139	0.08	21.93	23	1.279	0.178	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	10	QPSK	23800/711	1:1	0.197	0	23.18	24	1.208	0.238	22.3
Body worn Test Data at the worst case with Battery 3#											
Front side	10	QPSK	23800/711	1:1	0.142	-0.11	23.18	24	1.208	0.172	22.3
Hotspot actived for WIFI Test data(Separate 10mm 1RB_0 offset)											
Front side	10	QPSK	23800/711	1:1	0.173	0.03	20.38	21	1.153	0.200	22.3
Back side	10	QPSK	23800/711	1:1	0.167	0.03	20.38	21	1.153	0.193	22.3
Left side	10	QPSK	23800/711	1:1	0.0623	0.01	20.38	21	1.153	0.072	22.3
Right side	10	QPSK	23800/711	1:1	0.0118	0.02	20.38	21	1.153	0.014	22.3
Top side	10	QPSK	23800/711	1:1	0.125	0.02	20.38	21	1.153	0.144	22.3
Hotspot actived for WIFI Test data (Separate 10mm 25RB_0 offset)											
Front side	10	QPSK	23800/711	1:1	0.189	0.01	20.24	21	1.191	0.225	22.3
Back side	10	QPSK	23800/711	1:1	0.183	0.03	20.24	21	1.191	0.218	22.3
Left side	10	QPSK	23800/711	1:1	0.0675	0.08	20.24	21	1.191	0.080	22.3
Right side	10	QPSK	23800/711	1:1	0.0129	-0.1	20.24	21	1.191	0.015	22.3
Top side	10	QPSK	23800/711	1:1	0.135	0.04	20.24	21	1.191	0.161	22.3
Front side	10	QPSK	23780/709	1:1	0.236	0.03	20.16	21	1.213	0.286	22.3
Front side	10	QPSK	23790/710	1:1	0.238	0.08	20.15	21	1.216	0.289	22.3
Hotspot Test Data at the worst case with Battery 2#											
Front side	10	QPSK	23800/711	1:1	0.238	0.05	20.15	21	1.216	0.289	22.3
Hotspot Test Data at the worst case with Battery 3#											
Front side	10	QPSK	23800/711	1:1	0.243	0.03	20.15	21	1.216	0.296	22.3
Ant2 Additional Test data(simultaneous transmission with WIFI)											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_49 offset)											
Left cheek	10	QPSK	23800/711	1:1	0.408	0.08	18.42	19.3	1.225	0.500	22.3
Left tilted	10	QPSK	23800/712	1:1	0.341	0.06	18.42	19.3	1.225	0.418	22.3
Right tilted	10	QPSK	23800/711	1:1	0.314	0.08	17.44	18.5	1.276	0.401	22.3

Table 35: SAR of LTE Band 17 for Head and Body (Original report E5/2018/20036).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(1RB_49 offset)											
Right cheek	10	QPSK	23780/709	1:1	0.134	0.02	23.66	24	1.081	0.145	22.3
Head Test data at the Worst Case(1RB_49 offset) with SIM2											
Right cheek	10	QPSK	23780/709	1:1	0.131	0.02	23.66	24	1.081	0.142	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_0 offset)											
Back side	10	QPSK	23790/710	1:1	0.259	-0.06	23.54	24	1.112	0.288	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_0 offset) with SIM2											
Back side	10	QPSK	23790/710	1:1	0.26	0.01	23.54	24	1.112	0.289	22.3
Hotspot Test data at the Worst Case(Separate 10mm 1RB_0 offset)											
Back side	10	QPSK	23790/710	1:1	0.384	-0.18	23.54	24	1.112	0.427	22.3
Hotspot Test data at the Worst Case(Separate 10mm 1RB_0 offset) with SIM2											
Back side	10	QPSK	23790/710	1:1	0.377	-0.02	23.54	24	1.112	0.419	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(50%RB offset)											
Left cheek	10	QPSK	23800/711	1:1	0.716	-0.07	21.66	22.3	1.159	0.830	22.3
Head Test data at the Worst Case(50%RB offset) with SIM2											
Left cheek	10	QPSK	23800/711	1:1	0.713	0.03	21.66	22.3	1.159	0.826	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_25 offset)											
Front side	10	QPSK	23800/711	1:1	0.167	0.05	23.18	24	1.208	0.202	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_25 offset) with SIM2											
Front side	10	QPSK	23800/711	1:1	0.167	0.01	23.18	24	1.208	0.202	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm 25RB_0 offset)											
Front side	10	QPSK	23800/711	1:1	0.174	-0.09	20.15	21	1.216	0.212	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm 25RB_0 offset) with SIM2											
Front side	10	QPSK	23800/711	1:1	0.187	0.14	20.15	21	1.216	0.227	22.3

Table 36: SAR of LTE Band 17 for Head and Body (Variant).

8.3.12 SAR Result Of LTE Band 26

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_38 offset)											
Left cheek	15	QPSK	26775/822.5	1:1	0.143	0.04	23.35	24	1.161	0.166	22.3
Left tilted	15	QPSK	26775/822.5	1:1	0.0855	-0.12	23.35	24	1.161	0.099	22.3
Right cheek	15	QPSK	26775/822.5	1:1	0.195	-0.05	23.35	24	1.161	0.226	22.3
Right tilted	15	QPSK	26775/822.5	1:1	0.0903	0.06	23.35	24	1.161	0.105	22.3
Right cheek	15	QPSK	26865/831.5	1:1	0.217	0.01	23.29	24	1.178	0.256	22.3
Right tilted	15	QPSK	26965/841.5	1:1	0.215	0.03	23.27	24	1.183	0.254	22.3
Head Test data(50%RB_39 offset)											
Left cheek	15	QPSK	26775/822.5	1:1	0.117	-0.06	22.33	23	1.167	0.137	22.3
Left tilted	15	QPSK	26775/822.5	1:1	0.0681	-0.08	22.33	23	1.167	0.079	22.3
Right cheek	15	QPSK	26775/822.6	1:1	0.161	-0.11	22.33	23	1.167	0.188	22.3
Right tilted	15	QPSK	26775/822.7	1:1	0.0749	-0.05	22.33	23	1.167	0.087	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	15	QPSK	26865/831.5	1:1	0.216	0.14	23.29	24	1.178	0.254	22.3
Head Test Data at the worst case with Battery 3#											
Right cheek	15	QPSK	26865/831.5	1:1	0.215	0.02	23.29	24	1.178	0.253	22.3
Body worn Test data(Separate 15mm 1RB_38 offset)											
Front side	15	QPSK	26775/822.5	1:1	0.191	-0.09	23.35	24	1.161	0.222	22.3
Back side	15	QPSK	26775/822.5	1:1	0.21	0.05	23.35	24	1.161	0.244	22.3
Back side	15	QPSK	26865/831.5	1:1	0.252	0.04	23.29	24	1.178	0.297	22.3
Back side	15	QPSK	26965/841.5	1:1	0.307	0.07	23.27	24	1.183	0.363	22.3
Body worn Test data (Separate 15mm 50%RB_39 offset)											
Front side	15	QPSK	26775/822.5	1:1	0.162	-0.12	22.33	23	1.167	0.189	22.3
Back side	15	QPSK	26775/822.5	1:1	0.178	0.08	22.33	23	1.167	0.208	22.3
Body worn Test data at the worst case with Battery 2#											
Back side	15	QPSK	26965/841.5	1:1	0.233	-0.19	23.27	24	1.183	0.276	22.3
Body worn Test data at the worst case with Battery 3#											
Back side	15	QPSK	26965/841.5	1:1	0.271	0.06	23.27	24	1.183	0.321	22.3
Hotspot Test data(Separate 10mm 1RB_38 offset)											
Front side	15	QPSK	26775/822.5	1:1	0.328	-0.07	23.35	24	1.161	0.381	22.3
Back side	15	QPSK	26775/822.5	1:1	0.355	0.06	23.35	24	1.161	0.412	22.3
Left side	15	QPSK	26775/822.5	1:1	0.11	0.06	23.35	24	1.161	0.128	22.3
Right side	15	QPSK	26775/822.5	1:1	0.33	0.02	23.35	24	1.161	0.383	22.3
Bottom side	15	QPSK	26775/822.5	1:1	0.321	0.11	23.35	24	1.161	0.373	22.3
Back side	15	QPSK	26865/831.5	1:1	0.391	0.06	23.29	24	1.178	0.460	22.3
Back side	15	QPSK	26965/841.5	1:1	0.465	0.07	23.27	24	1.183	0.550	22.3
Hotspot Test data (Separate 10mm 50%RB_39 offset)											
Front side	15	QPSK	26775/822.5	1:1	0.273	-0.07	22.33	23	1.167	0.319	22.3
Back side	15	QPSK	26775/822.5	1:1	0.293	0.03	22.33	23	1.167	0.342	22.3

Left side	15	QPSK	26775/822.5	1:1	0.089	0.04	22.33	23	1.167	0.104	22.3
Right side	15	QPSK	26775/822.5	1:1	0.272	0	22.33	23	1.167	0.317	22.3
Bottom side	15	QPSK	26775/822.5	1:1	0.211	0	22.33	23	1.167	0.246	22.3
Hotspot Test data at the worst case with Battery 2#											
Back side	15	QPSK	26965/841.5	1:1	0.422	0.06	23.27	24	1.183	0.499	22.3
Hotspot Test data at the worst case with Battery 3#											
Back side	15	QPSK	26965/841.5	1:1	0.319	0.08	23.27	24	1.183	0.377	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_0 offset)											
Left cheek	15	QPSK	26865/831.5	1:1	0.411	0.11	20.54	21.5	1.247	0.513	22.3
Left tilted	15	QPSK	26865/831.5	1:1	0.322	0	20.54	21.5	1.247	0.402	22.3
Right cheek	15	QPSK	26865/831.5	1:1	0.348	-0.03	20.55	21.5	1.245	0.433	22.3
Right tilted	15	QPSK	26865/831.5	1:1	0.269	0.02	20.55	21.5	1.245	0.335	22.3
Head Test data(50%RB_18 offset)											
Left cheek	15	QPSK	26775/822.5	1:1	0.438	0.03	20.63	21.5	1.222	0.535	22.3
Left tilted	15	QPSK	26775/822.5	1:1	0.343	0.11	20.63	21.5	1.222	0.419	22.3
Right cheek	15	QPSK	26775/822.5	1:1	0.36	0.02	20.59	21.5	1.233	0.444	22.3
Right tilted	15	QPSK	26775/822.5	1:1	0.28	0.05	20.59	21.5	1.233	0.345	22.3
Left cheek	15	QPSK	26865/831.5	1:1	0.408	0.02	20.49	21.5	1.262	0.515	22.3
Left cheek	15	QPSK	26965/841.5	1:1	0.453	0.01	20.54	21.5	1.247	0.565	22.3
Head Test Data at the worst case with Battery 2#											
Left cheek	15	QPSK	26965/841.5	1:1	0.512	-0.02	20.54	21.5	1.247	0.639	22.3
Head Test Data at the worst case with Battery 3#											
Left cheek	15	QPSK	26965/841.5	1:1	0.529	-0.07	20.54	21.5	1.247	0.660	22.3
Body worn Test data(Separate 15mm 1RB_38 offset)											
Front side	15	QPSK	26865/831.5	1:1	0.14	0.13	23.17	24	1.211	0.169	22.3
Back side	15	QPSK	26865/831.5	1:1	0.136	-0.07	23.17	24	1.211	0.165	22.3
Front side	15	QPSK	26775/822.5	1:1	0.16	0.11	23.06	24	1.242	0.199	22.3
Front side	15	QPSK	26965/841.5	1:1	0.143	0.08	23.07	24	1.239	0.177	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	15	QPSK	26775/822.5	1:1	0.126	0.11	22.17	23	1.211	0.153	22.3
Back side	15	QPSK	26775/822.5	1:1	0.123	-0.07	22.17	23	1.211	0.149	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	15	QPSK	26775/822.5	1:1	0.158	0.14	23.06	24	1.242	0.196	22.3
Body worn Test Data at the worst case with Battery 3#											
Front side	15	QPSK	26775/822.5	1:1	0.146	-0.02	23.06	24	1.242	0.181	22.3
Hotspot activated for WIFI Test data(Separate 10mm 1RB_0 offset)											
Front side	15	QPSK	26865/831.5	1:1	0.149	0.18	20.05	21	1.245	0.185	22.3
Back side	15	QPSK	26865/831.5	1:1	0.168	0.07	20.05	21	1.245	0.209	22.3
Left side	15	QPSK	26865/831.5	1:1	0.0514	-0.02	20.05	21	1.245	0.064	22.3
Right side	15	QPSK	26865/831.5	1:1	0.00968	0.02	20.05	21	1.245	0.012	22.3

Top side	15	QPSK	26865/831.5	1:1	0.11	0.07	20.05	21	1.245	0.137	22.3
Back side	15	QPSK	26775/822.5	1:1	0.205	-0.14	19.94	21	1.276	0.262	22.3
Back side	15	QPSK	26965/841.5	1:1	0.157	-0.16	19.92	21	1.282	0.201	22.3
Hotspot activated for WIFITest data (Separate 10mm 50%RB_18 offset)											
Front side	15	QPSK	26865/831.5	1:1	0.145	0.16	20.08	21	1.236	0.179	22.3
Back side	15	QPSK	26865/831.5	1:1	0.162	-0.11	20.08	21	1.236	0.200	22.3
Left side	15	QPSK	26865/831.5	1:1	0.0504	-0.05	20.08	21	1.236	0.062	22.3
Right side	15	QPSK	26865/831.5	1:1	0.00942	-0.09	20.08	21	1.236	0.012	22.3
Top side	15	QPSK	26865/831.5	1:1	0.114	0.13	20.08	21	1.236	0.141	22.3
Hotspot Test Data at the worst case with Battery 2#											
Back side	15	QPSK	26775/822.5	1:1	0.156	-0.13	19.94	21	1.276	0.199	22.3
Hotspot Test Data at the worst case with Battery 3#											
Back side	15	QPSK	26775/822.5	1:1	0.168	-0.08	19.94	21	1.276	0.214	22.3

Table 37: SAR of LTE Band 26 for Head and Body (Original report E5/2018/20036)

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

LTE Band 26 SAR Test Record											
Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(1RB_38 offset)											
Right cheek	15	QPSK	26865/831.5	1:1	0.212	-0.06	23.29	24	1.178	0.250	22.3
Head Test data at the Worst Case(1RB_38 offset) with SIM2											
Right cheek	15	QPSK	26865/831.5	1:1	0.223	0.06	23.29	24	1.178	0.263	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_38 offset)											
Back side	15	QPSK	26965/841.5	1:1	0.38	0.04	23.27	24	1.183	0.450	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_38 offset) with SIM2											
Back side	15	QPSK	26965/841.5	1:1	0.379	0.03	23.27	24	1.183	0.448	22.3
Hotspot Test data at the Worst Case(Separate 10mm 1RB_38 offset)											
Back side	15	QPSK	26965/841.5	1:1	0.554	0.02	23.27	24	1.183	0.655	22.3
Hotspot Test data at the Worst Case(Separate 10mm 1RB_38 offset) with SIM2											
Back side	15	QPSK	26965/841.5	1:1	0.552	0.04	23.27	24	1.183	0.653	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(50%RB_18 offset)											
Left cheek	15	QPSK	26965/841.5	1:1	0.509	0.02	20.54	21.5	1.247	0.635	22.3
Head Test data at the Worst Case(50%RB_18 offset) with SIM2											
Left cheek	15	QPSK	26965/841.5	1:1	0.52	0.06	20.54	21.5	1.247	0.649	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_38 offset)											
Front side	15	QPSK	26775/822.5	1:1	0.179	0	23.06	24	1.242	0.222	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_38 offset) with SIM2											
Front side	15	QPSK	26775/822.5	1:1	0.178	0	23.06	24	1.242	0.221	22.3
Hotspot actived for WIFI Test data at the Worst Case(Separate 10mm 1RB_0 offset)											
Back side	15	QPSK	26775/822.5	1:1	0.182	0.04	19.94	21	1.276	0.232	22.3
Hotspot actived for WIFI Test data at the Worst Case(Separate 10mm 1RB_0 offset) with SIM2											
Back side	15	QPSK	26775/822.5	1:1	0.183	0.16	19.94	21	1.276	0.234	22.3

Table 38: SAR of LTE Band 26 for Head and Body (Variant)

8.3.13 SAR Result Of LTE Band 38

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_99 offset)											
Left cheek	20	QPSK	38150/2610	1:1.58	0.018	0.08	23.63	24	1.089	0.019	22.3
Left tilted	20	QPSK	38150/2610	1:1.58	0.008	0.01	23.63	24	1.089	0.009	22.3
Right cheek	20	QPSK	38150/2610	1:1.58	0.044	0	23.63	24	1.089	0.048	22.3
Right tilted	20	QPSK	38150/2610	1:1.58	0.016	0.03	23.63	24	1.089	0.017	22.3
Right cheek	20	QPSK	37850/2580	1:1.58	0.050	0	23.46	24	1.132	0.057	22.3
Right cheek	20	QPSK	38000/2595	1:1.58	0.048	0.08	23.54	24	1.112	0.053	22.3
Head Test data(50%RB_50 offset)											
Left cheek	20	QPSK	38150/2610	1:1.58	0.013	0.00	22.47	23	1.130	0.015	22.3
Left tilted	20	QPSK	38150/2610	1:1.58	0.005	0.01	22.47	23	1.130	0.006	22.3
Right cheek	20	QPSK	38150/2610	1:1.58	0.034	0	22.47	23	1.130	0.038	22.3
Right tilted	20	QPSK	38150/2610	1:1.58	0.014	0.01	22.47	23	1.130	0.016	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	20	QPSK	37850/2580	1:1.58	0.065	0.08	23.46	24	1.132	0.073	22.3
Head Test Data at the worst case with Battery 3#											
Right cheek	20	QPSK	37850/2580	1:1.58	0.055	0	23.46	24	1.132	0.062	22.3
Body worn Test data(Separate 15mm 1RB_99 offset)											
Front side	20	QPSK	38150/2610	1:1.58	0.141	0.04	23.63	24	1.089	0.154	22.3
Back side	20	QPSK	38150/2610	1:1.58	0.132	-0.01	23.63	24	1.089	0.144	22.3
Front side	20	QPSK	37850/2580	1:1.58	0.194	-0.03	23.46	24	1.132	0.220	22.3
Front side	20	QPSK	38000/2595	1:1.58	0.174	0.03	23.54	24	1.112	0.193	22.3
Body worn Test data (Separate 15mm 50%RB_50 offset)											
Front side	20	QPSK	38150/2610	1:1.58	0.134	-0.02	22.47	23	1.130	0.151	22.3
Back side	20	QPSK	38150/2610	1:1.58	0.107	-0.02	22.47	23	1.130	0.121	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	20	QPSK	37850/2580	1:1.58	0.19	-0.06	23.46	24	1.132	0.215	22.3
Body worn Test Data at the worst case with Battery 3#											
Front side	20	QPSK	37850/2580	1:1.58	0.206	-0.06	23.46	24	1.132	0.233	22.3
Hotspot Test data(Separate 10mm 1RB_99 offset)											
Front side	20	QPSK	38000/2595	1:1.58	0.214	-0.07	22.51	23	1.119	0.240	22.3
Back side	20	QPSK	38000/2595	1:1.58	0.182	-0.02	22.51	23	1.119	0.204	22.3
Left side	20	QPSK	38000/2595	1:1.58	0.0685	-0.03	22.51	23	1.119	0.077	22.3
Right side	20	QPSK	38000/2595	1:1.58	0.0487	-0.02	22.51	23	1.119	0.055	22.3
Bottom side	20	QPSK	38000/2595	1:1.58	0.454	0.07	22.51	23	1.119	0.508	22.3
Hotspot Test data (Separate 10mm 50%RB_50 offset)											
Front side	20	QPSK	38150/2610	1:1.58	0.254	-0.06	22.5	23	1.122	0.285	22.3
Back side	20	QPSK	38150/2610	1:1.58	0.191	0.04	22.5	23	1.122	0.214	22.3
Left side	20	QPSK	38150/2610	1:1.58	0.0707	-0.11	22.5	23	1.122	0.079	22.3
Right side	20	QPSK	38150/2610	1:1.58	0.0494	-0.04	22.5	23	1.122	0.055	22.3

Bottom side	20	QPSK	38150/2610	1:1.58	0.459	-0.03	22.5	23	1.122	0.515	22.3
Bottom side	20	QPSK	37850/2580	1:1.58	0.532	-0.02	22.38	23	1.153	0.614	22.3
Bottom side	20	QPSK	38000/2595	1:1.58	0.486	0	22.43	23	1.140	0.554	22.3
Hotspot Test Data at the worst case with Battery 2#											
Bottom side	20	QPSK	37850/2580	1:1.58	0.527	-0.04	22.38	23	1.153	0.608	22.3
Hotspot Test Data at the worst case with Battery 3#											
Bottom side	20	QPSK	37850/2580	1:1.58	0.61	0.02	22.38	23	1.153	0.704	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB offset)											
Left cheek	20	QPSK	38150/2610	1:1.58	0.257	-0.05	19.29	19.8	1.125	0.289	22.3
Left tilted	20	QPSK	38150/2610	1:1.58	0.237	-0.02	19.29	19.8	1.125	0.267	22.3
Right cheek	20	QPSK	38150/2610	1:1.58	0.341	0.05	15.38	15.8	1.102	0.376	22.3
Right tilted	20	QPSK	38150/2610	1:1.58	0.368	0.03	15.38	15.8	1.102	0.405	22.3
Head Test data(50%RB offset)											
Left cheek	20	QPSK	38150/2610	1:1.58	0.243	0.02	19.21	19.8	1.146	0.278	22.3
Left tilted	20	QPSK	38150/2610	1:1.58	0.244	0.05	19.21	19.8	1.146	0.280	22.3
Right cheek	20	QPSK	38150/2610	1:1.58	0.338	0.11	15.31	15.8	1.119	0.378	22.3
Right tilted	20	QPSK	38150/2610	1:1.58	0.372	0.03	15.31	15.8	1.119	0.416	22.3
Right tilted	20	QPSK	37850/2580	1:1.58	0.426	0.12	15.19	15.8	1.151	0.490	22.3
Right tilted	20	QPSK	38000/2595	1:1.58	0.389	0.15	15.14	15.8	1.164	0.453	22.3
Head Test Data at the worst case with Battery 2#											
Right tilted	20	QPSK	37850/2580	1:1.58	0.459	0	15.19	15.8	1.151	0.528	22.3
Head Test Data at the worst case with Battery 3#											
Right tilted	20	QPSK	37850/2580	1:1.58	0.438	0.01	15.19	15.8	1.151	0.504	22.3
Body worn Test data(Separate 15mm 1RB_99offset)											
Front side	20	QPSK	38000/2595	1:1.58	0.116	-0.1	21.18	21.8	1.153	0.134	22.3
Back side	20	QPSK	38000/2595	1:1.58	0.12	0.01	21.18	21.8	1.153	0.138	22.3
Back side	20	QPSK	37850/2580	1:1.58	0.137	-0.08	21.05	21.8	1.189	0.163	22.3
Back side	20	QPSK	38150/2610	1:1.58	0.114	0.05	21.08	21.8	1.180	0.135	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	20	QPSK	37850/2580	1:1.58	0.113	0.09	21.07	21.8	1.183	0.134	22.3
Back side	20	QPSK	37850/2580	1:1.58	0.131	0.09	21.07	21.8	1.183	0.155	22.3
Body worn Test Data at the worst case with Battery 2#											
Back side	20	QPSK	37850/2580	1:1.58	0.092	0.05	21.05	21.8	1.189	0.109	22.3
Body worn Test Data at the worst case with Battery 3#											
Back side	20	QPSK	37850/2580	1:1.58	0.104	0.05	21.05	21.8	1.189	0.124	22.3
Hotspot activated for WIFI Test data(Separate 10mm 1RB_0 offset)											
Front side	20	QPSK	37850/2580	1:1.58	0.137	0.03	18.26	18.8	1.132	0.155	22.3
Back side	20	QPSK	37850/2581	1:1.58	0.15	0.01	18.26	18.8	1.132	0.170	22.3
Left side	20	QPSK	37850/2582	1:1.58	0.0676	0.01	18.26	18.8	1.132	0.077	22.3
Right side	20	QPSK	37850/2583	1:1.58	0.0199	-0.08	18.26	18.8	1.132	0.023	22.3

Top side	20	QPSK	37850/2584	1:1.58	0.219	-0.2	18.26	18.8	1.132	0.248	22.3
Top side	20	QPSK	38000/2595	1:1.58	0.177	-0.01	17.97	18.8	1.211	0.214	22.3
Top side	20	QPSK	38150/2610	1:1.58	0.184	-0.05	18.17	18.8	1.156	0.213	22.3
Hotspot activated for WIFI Test data(Separate 10mm 50%RB_0 offset)											
Front side	20	QPSK	37850/2580	1:1.58	0.135	0.09	18.08	18.8	1.180	0.159	22.3
Back side	20	QPSK	37850/2581	1:1.58	0.146	0.02	18.08	18.8	1.180	0.172	22.3
Left side	20	QPSK	37850/2582	1:1.58	0.0662	0.09	18.08	18.8	1.180	0.078	22.3
Right side	20	QPSK	37850/2583	1:1.58	0.0202	-0.05	18.08	18.8	1.180	0.024	22.3
Top side	20	QPSK	37850/2584	1:1.58	0.204	-0.04	18.08	18.8	1.180	0.241	22.3
Hotspot Test Data at the worst case with Battery 2#											
Top side	20	QPSK	37850/2584	1:1.58	0.246	0.08	18.26	18.8	1.132	0.279	22.3
Hotspot Test Data at the worst case with Battery 3#											
Top side	20	QPSK	37850/2584	1:1.58	0.215	0.11	18.26	18.8	1.132	0.243	22.3

Table 39: SAR of LTE Band 38 for Head and Body (Original report E5/2018/20036).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(1RB_99 offset)											
Right cheek	20	QPSK	37850/2580	1:1.58	0.0528	0.09	23.46	24	1.132	0.060	22.3
Head Test data at the Worst Case(1RB_99 offset) with SIM2											
Right cheek	20	QPSK	37850/2580	1:1.58	0.0527	0.08	23.46	24	1.132	0.060	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_99 offset)											
Front side	20	QPSK	37850/2580	1:1.58	0.225	-0.07	23.46	24	1.132	0.255	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_99 offset) with SIM2											
Front side	20	QPSK	37850/2580	1:1.58	0.224	0.03	23.46	24	1.132	0.254	22.3
Hotspot Test data at the Worst Case(Separate 10mm 50%RB_50 offset)											
Bottom side	20	QPSK	37850/2580	1:1.58	0.702	0.09	22.38	23	1.153	0.810	22.3
Hotspot Test data at the Worst Case(Separate 10mm 50%RB_50 offset) with SIM2											
Bottom side	20	QPSK	37850/2580	1:1.58	0.675	0.02	22.38	23	1.153	0.779	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(50%RB offset)											
Right tilted	20	QPSK	37850/2580	1:1.58	0.465	0.05	15.19	15.8	1.151	0.535	22.3
Head Test data at the Worst Case(50%RB offset) with SIM2											
Right tilted	20	QPSK	37850/2580	1:1.58	0.458	0.09	15.19	15.8	1.151	0.527	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_99offset)											
Back side	20	QPSK	37850/2580	1:1.58	0.0869	0.05	21.05	21.8	1.189	0.103	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_99offset) with SIM2											
Back side	20	QPSK	37850/2580	1:1.58	0.0866	0.01	21.05	21.8	1.189	0.103	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm 1RB_0 offset)											
Top side	20	QPSK	37850/2584	1:1.58	0.213	0	18.26	18.8	1.132	0.241	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm 1RB_0 offset) with SIM2											
Top side	20	QPSK	37850/2584	1:1.58	0.196	0.16	18.26	18.8	1.132	0.222	22.3

Table 40: SAR of LTE Band 38 for Head and Body (Variant).

8.3.14 SAR Result Of LTE Band 41

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_99 offset)											
Left cheek	20	QPSK	40690/2600	1:1.58	0.020	0.09	23.23	24	1.194	0.023	22.3
Left tilted	20	QPSK	40690/2600	1:1.58	0.011	0.05	23.23	24	1.194	0.013	22.3
Right cheek	20	QPSK	40690/2600	1:1.58	0.047	0	23.23	24	1.194	0.056	22.3
Right tilted	20	QPSK	40690/2600	1:1.58	0.021	0.04	23.23	24	1.194	0.025	22.3
Right cheek	20	QPSK	40240/2555	1:1.58	0.056	0.04	23.11	24	1.227	0.069	22.3
Right cheek	20	QPSK	41140/2645	1:1.58	0.048	0	23.18	24	1.208	0.058	22.3
Head Test data(50%RB_0 offset)											
Left cheek	20	QPSK	40690/2600	1:1.58	0.018	0	22.08	23	1.236	0.022	22.3
Left tilted	20	QPSK	40690/2600	1:1.58	0.008	0.05	22.08	23	1.236	0.010	22.3
Right cheek	20	QPSK	40690/2600	1:1.58	0.035	0	22.08	23	1.236	0.044	22.3
Right tilted	20	QPSK	40690/2600	1:1.58	0.017	0.09	22.08	23	1.236	0.021	22.3
Head Test Data at the worst case with Battery 2#											
Right cheek	20	QPSK	40240/2555	1:1.58	0.065	0	23.11	24	1.227	0.080	22.3
Head Test Data at the worst case with Battery 3#											
Right cheek	20	QPSK	40240/2555	1:1.58	0.056	0	23.11	24	1.227	0.068	22.3
Body worn Test data(Separate 15mm 1RB_99 offset)											
Front side	20	QPSK	40690/2600	1:1.58	0.24	0.04	23.23	24	1.194	0.287	22.3
Back side	20	QPSK	40690/2600	1:1.58	0.127	-0.02	23.23	24	1.194	0.152	22.3
Front side	20	QPSK	40240/2555	1:1.58	0.185	-0.05	23.11	24	1.227	0.227	22.3
Front side	20	QPSK	41140/2645	1:1.58	0.134	-0.03	23.18	24	1.208	0.162	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	20	QPSK	41140/2645	1:1.58	0.118	-0.04	22.07	23	1.239	0.146	22.3
Back side	20	QPSK	41140/2645	1:1.58	0.0979	0.11	22.07	23	1.239	0.121	22.3
Body worn Test Data at the worst case with Battery 2#											
Front side	20	QPSK	40690/2600	1:1.58	0.139	-0.04	23.23	24	1.194	0.166	22.3
Body worn Test Data at the worst case with Battery 3#											
Front side	20	QPSK	40690/2600	1:1.58	0.145	-0.09	23.23	24	1.194	0.173	22.3
Hotspot Test data(Separate 10mm 1RB_0 offset)											
Front side	20	QPSK	40240/2555	1:1.58	0.204	0	20.66	21.5	1.213	0.248	22.3
Back side	20	QPSK	40240/2555	1:1.58	0.143	-0.07	20.66	21.5	1.213	0.174	22.3
Left side	20	QPSK	40240/2555	1:1.58	0.0869	-0.02	20.66	21.5	1.213	0.105	22.3
Right side	20	QPSK	40240/2555	1:1.58	0.0343	-0.08	20.66	21.5	1.213	0.042	22.3
Bottom side	20	QPSK	40240/2555	1:1.58	0.283	-0.03	20.66	21.5	1.213	0.343	22.3
Hotspot Test data (Separate 10mm 50%RB_0 offset)											
Front side	20	QPSK	41140/2645	1:1.58	0.14	0.02	20.57	21.5	1.239	0.173	22.3
Back side	20	QPSK	41140/2645	1:1.58	0.0767	0.01	20.57	21.5	1.239	0.095	22.3
Left side	20	QPSK	41140/2645	1:1.58	0.0599	0.15	20.57	21.5	1.239	0.074	22.3
Right side	20	QPSK	41140/2645	1:1.58	0.0361	0.01	20.57	21.5	1.239	0.045	22.3

Bottom side	20	QPSK	41140/2645	1:1.58	0.289	0.03	20.57	21.5	1.239	0.358	22.3
Bottom side	20	QPSK	40240/2555	1:1.58	0.205	0	20.57	21.5	1.239	0.254	22.3
Bottom side	20	QPSK	40690/2605	1:1.58	0.162	0.15	20.57	21.5	1.239	0.201	22.3
Hotspot Test Data at the worst case with Battery 2#											
Bottom side	20	QPSK	41140/2645	1:1.58	0.286	-0.07	20.57	21.5	1.239	0.354	22.3
Hotspot Test Data at the worst case with Battery 3#											
Bottom side	20	QPSK	41140/2645	1:1.58	0.291	-0.06	20.57	21.5	1.239	0.360	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB offset)											
Left cheek	20	QPSK	40240/2555	1:1.58	0.68	-0.09	19.61	20	1.094	0.744	22.3
Left tilted	20	QPSK	40240/2555	1:1.58	0.623	-0.03	19.61	20	1.094	0.682	22.3
Right cheek	20	QPSK	40690/2605	1:1.58	0.505	0.02	15.59	16	1.099	0.555	22.3
Right tilted	20	QPSK	40690/2605	1:1.58	0.476	0.04	15.59	16	1.099	0.523	22.3
Left cheek	20	QPSK	40690/2605	1:1.58	0.564	-0.07	19.38	20	1.153	0.651	22.3
Left cheek	20	QPSK	41140/2645	1:1.58	0.415	0.01	19.46	20	1.132	0.470	22.3
Head Test data(50%RB offset)											
Left cheek	20	QPSK	41140/2645	1:1.58	0.355	-0.08	19.38	20	1.153	0.409	22.3
Left tilted	20	QPSK	41140/2645	1:1.58	0.31	-0.01	19.38	20	1.153	0.358	22.3
Right cheek	20	QPSK	40690/2600	1:1.58	0.482	0.06	15.36	16	1.159	0.559	22.3
Right tilted	20	QPSK	40690/2600	1:1.58	0.45	0.05	15.36	16	1.159	0.521	22.3
Head Test Data at the worst case with Battery 2#											
Left cheek	20	QPSK	40240/2555	1:1.58	0.637	-0.02	19.61	20	1.094	0.697	22.3
Head Test Data at the worst case with Battery 3#											
Left cheek	20	QPSK	40240/2555	1:1.58	0.664	0.02	19.61	20	1.094	0.726	22.3
Body worn Test data(Separate 15mm 1RB_0 offset)											
Front side	20	QPSK	40240/2555	1:1.58	0.117	0	21.01	21.5	1.119	0.131	22.3
Back side	20	QPSK	40240/2555	1:1.58	0.2	0.05	21.01	21.5	1.119	0.224	22.3
Back side	20	QPSK	40690/2600	1:1.58	0.131	-0.06	20.73	21.5	1.194	0.156	22.3
Back side	20	QPSK	41140/2645	1:1.58	0.093	0.01	20.76	21.5	1.186	0.110	22.3
Body worn Test data (Separate 15mm 50%RB_0 offset)											
Front side	20	QPSK	40240/2555	1:1.58	0.111	0.05	20.67	21.5	1.211	0.134	22.3
Back side	20	QPSK	40240/2555	1:1.58	0.196	-0.09	20.67	21.5	1.211	0.237	22.3
Body worn Test Data at the worst case with Battery 2#											
Back side	20	QPSK	40240/2555	1:1.58	0.177	0.09	21.01	21.5	1.119	0.198	22.3
Body worn Test Data at the worst case with Battery 3#											
Back side	20	QPSK	40240/2555	1:1.58	0.156	-0.11	21.01	21.5	1.119	0.175	22.3
Hotspot actived for WIFI Test data(Separate 10mm 1RB_0 offset)											
Front side	20	QPSK	40240/2555	1:1.58	0.124	-0.02	18.00	18.5	1.122	0.139	22.3
Back side	20	QPSK	40240/2555	1:1.58	0.162	0.06	18.00	18.5	1.122	0.182	22.3
Left side	20	QPSK	40240/2555	1:1.58	0.0858	0.05	18.00	18.5	1.122	0.096	22.3
Right side	20	QPSK	40240/2555	1:1.58	0.0225	-0.01	18.00	18.5	1.122	0.025	22.3

Top side	20	QPSK	40240/2555	1:1.58	0.296	0.143	18.00	18.5	1.122	0.332	22.3
Top side	20	QPSK	40690/2600	1:1.58	0.181	-0.19	17.89	18.5	1.151	0.208	22.3
Top side	20	QPSK	41140/2645	1:1.58	0.152	-0.16	17.86	18.5	1.159	0.176	22.3
Hotspot activated for 2.4G WIFI Test data (Separate 10mm 50%RB_0 offset)											
Front side	20	QPSK	40240/2555	1:1.58	0.119	0.02	17.72	18.5	1.197	0.142	22.3
Back side	20	QPSK	40240/2555	1:1.58	0.16	0.08	17.72	18.5	1.197	0.191	22.3
Left side	20	QPSK	40240/2555	1:1.58	0.0805	0.03	17.72	18.5	1.197	0.096	22.3
Right side	20	QPSK	40240/2555	1:1.58	0.0222	-0.05	17.72	18.5	1.197	0.027	22.3
Top side	20	QPSK	40240/2555	1:1.58	0.266	0.02	17.72	18.5	1.197	0.318	22.3
Hotspot Test Data at the worst case with Battery 2#											
Top side	20	QPSK	40240/2555	1:1.58	0.304	-0.02	18.00	18.5	1.122	0.341	22.3
Hotspot Test Data at the worst case with Battery 3#											
Top side	20	QPSK	40240/2555	1:1.58	0.289	0.13	18.00	18.5	1.122	0.324	22.3
Ant2 Additional Test data(simultaneous transmission with WIFI)											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data(1RB_99 offset)											
Left tilted	20	QPSK	40240/2565	1:1.58	0.294	-0.06	16.38	17	1.153	0.339	22.3

Table 41: SAR of LTE Band 41 for Head and Body (Original report E5/2018/20036).

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(1RB_99 offset)											
Right cheek	20	QPSK	40240/2555	1:1.58	0.0702	0.06	23.11	24	1.227	0.086	22.3
Head Test data at the Worst Case(1RB_99 offset) with SIM2											
Right cheek	20	QPSK	40240/2555	1:1.58	0.0684	0.01	23.11	24	1.227	0.084	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_99 offset)											
Front side	20	QPSK	40690/2600	1:1.58	0.195	0.04	23.23	24	1.194	0.233	22.3
Body worn Test data at the Worst Case(Separate 15mm 1RB_99 offset) with SIM2											
Front side	20	QPSK	40690/2600	1:1.58	0.194	0.18	23.23	24	1.194	0.232	22.3
Hotspot Test data at the Worst Case(Separate 10mm 50RB_0 offset)											
Bottom side	20	QPSK	41140/2645	1:1.58	0.365	-0.02	20.57	21.5	1.239	0.452	22.3
Hotspot Test data at the Worst Case(Separate 10mm 50RB_0 offset) with SIM2											
Bottom side	20	QPSK	41140/2645	1:1.58	0.366	-0.2	20.57	21.5	1.239	0.453	22.3
Ant2 Test data											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case(1RB offset)											
Left cheek	20	QPSK	40240/2555	1:1.58	0.775	0.05	19.61	20	1.094	0.848	22.3
Head Test data at the Worst Case(1RB offset) with SIM2											
Left cheek	20	QPSK	40240/2555	1:1.58	0.768	-0.01	19.61	20	1.094	0.840	22.3
Body worn Test data at the Worst Case(Separate 15mm 50%RB_0 offset)											
Back side	20	QPSK	40240/2555	1:1.58	0.114	0.04	20.67	21.5	1.211	0.138	22.3
Body worn Test data at the Worst Case(Separate 15mm 50%RB_0 offset) with SIM2											
Back side	20	QPSK	40240/2555	1:1.58	0.114	-0.02	20.67	21.5	1.211	0.138	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm 1RB_0 offset)											
Top side	20	QPSK	40240/2555	1:1.58	0.213	-0.03	18.00	18.5	1.122	0.239	22.3
Hotspot activated for WIFI Test data at the Worst Case(Separate 10mm 1RB_0 offset) with SIM2											
Top side	20	QPSK	40240/2555	1:1.58	0.208	-0.06	18.00	18.5	1.122	0.233	22.3
Ant2 Additional Test data(simultaneous transmission with WIFI)											
Test position	BW.	Test mode	Test Ch./Freq.	Duty Cycle	SAR (W/kg)1-g	Power Drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Left Cheek	20	QPSK	40240/2565	1:1.58	0.302	-0.08	16.38	17	1.153	0.348	22.3

Table 42: SAR of LTE Band 41 for Head and Body (Variant).

8.3.15 SAR Result Of 2.4GHz WIFI

WiFi 1 Test data											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data											
Left cheek	802.11b	6/2437	99.09%	1.009	0.377	-0.14	15.28	16.5	1.324	0.504	22
Left tilted	802.11b	6/2437	99.09%	1.009	0.462	-0.03	15.28	16.5	1.324	0.617	22
Right cheek	802.11b	6/2437	99.09%	1.009	0.219	0.12	15.28	16.5	1.324	0.293	22
Right tilted	802.11b	6/2437	99.09%	1.009	0.291	0.05	15.28	16.5	1.324	0.389	22
Left tilted	802.11b	1/2412	99.09%	1.009	0.461	-0.16	15.16	16.5	1.361	0.633	22
Left tilted	802.11b	11/2462	99.09%	1.009	0.307	0.02	15.25	16.5	1.334	0.413	22
Head Test Data at the worst case with Battery 2#											
Left tilted	802.11b	1/2412	99.09%	1.009	0.457	-0.19	15.16	16.5	1.361	0.622	22.3
Head Test Data at the worst case with Battery 3#											
Left tilted	802.11b	1/2412	99.09%	1.009	0.439	0.08	15.16	16.5	1.361	0.598	22.3
Body worn Test data(Separate 15mm)											
Front side	802.11b	6/2437	99.09%	1.009	0.0955	0.07	18.36	19.5	1.300	0.125	22
Back side	802.11b	6/2437	99.09%	1.009	0.124	-0.05	18.36	19.5	1.300	0.163	22
Back side	802.11b	1/2412	99.09%	1.009	0.135	-0.04	18.24	19.5	1.337	0.182	22
Back side	802.11b	11/2462	99.09%	1.009	0.0731	0.03	17.89	19.5	1.449	0.107	22
Body worn Test Data at the worst case with Battery 2#											
Back side	802.11b	1/2412	99.09%	1.009	0.133	0.19	18.24	19.5	1.337	0.178	22.3
Body worn Test Data at the worst case with Battery 3#											
Back side	802.11b	1/2412	99.09%	1.009	0.125	-0.05	18.24	19.5	1.337	0.167	22.3
Hotspot Test data (Separate 10mm)											
Front side	802.11b	6/2437	99.09%	1.009	0.167	0.06	18.36	19.5	1.300	0.219	22
Back side	802.11b	6/2437	99.09%	1.009	0.223	-0.04	18.36	19.5	1.300	0.293	22
Right side	802.11b	6/2437	99.09%	1.009	0.136	-0.15	18.36	19.5	1.300	0.178	22
Top side	802.11b	6/2437	99.09%	1.009	0.437	0.1	18.36	19.5	1.300	0.573	22
Top side	802.11b	1/2412	99.09%	1.009	0.475	0.03	18.24	19.5	1.337	0.641	22
Top side	802.11b	11/2462	99.09%	1.009	0.219	0.15	17.89	19.5	1.449	0.320	22
Hotspot Test Data at the worst case with Battery 2#											
Top side	802.11b	1/2412	99.09%	1.009	0.357	-0.03	18.24	19.5	1.337	0.477	22.3
Hotspot Test Data at the worst case with Battery 3#											
Top side	802.11b	1/2412	99.09%	1.009	0.4	0.03	18.24	19.5	1.337	0.535	22.3
WiFi 2 Test data											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data											
Left cheek	802.11b	11/2462	98.85%	1.012	0.00865	-0.04	17.89	18	1.026	0.009	22
Left tilted	802.11b	11/2462	98.85%	1.012	0.00421	-0.07	17.89	18	1.026	0.004	22

Right cheek	802.11b	11/2462	98.85%	1.012	0.0471	0.02	17.89	18	1.026	0.049	22
Right tilted	802.11b	11/2462	98.85%	1.012	0.0274	0.07	17.89	18	1.026	0.028	22
Right cheek	802.11b	1/2412	98.85%	1.012	0.0459	0.06	17.44	18	1.138	0.053	22
Right cheek	802.11b	6/2437	98.85%	1.012	0.047	0	17.06	18	1.242	0.059	22
Head Test Data at the worst case with Battery 2#											
Right cheek	802.11b	6/2437	98.85%	1.012	0.046	0.03	17.06	18	1.242	0.057	22.3
Head Test Data at the worst case with Battery 3#											
Right cheek	802.11b	6/2437	98.85%	1.012	0.0443	0.12	17.06	18	1.242	0.055	22.3
Body worn Test data(Separate 15mm)											
Front side	802.11b	1/2412	98.85%	1.012	0.00594	-0.06	18.08	19	1.236	0.007	22
Back side	802.11b	1/2412	98.85%	1.012	0.0396	-0.02	18.08	19	1.236	0.050	22
Back side	802.11b	6/2437	98.85%	1.012	0.047	-0.05	17.67	19	1.358	0.065	22
Back side	802.11b	11/2462	98.85%	1.012	0.0454	-0.07	17.65	18	1.084	0.050	22
Body worn Test Data at the worst case with Battery 2#											
Back side	802.11b	6/2437	98.85%	1.012	0.0292	-0.05	17.67	19	1.358	0.040	22.3
Body worn Test Data at the worst case with Battery 3#											
Back side	802.11b	6/2437	98.85%	1.012	0.0366	-0.04	17.67	19	1.358	0.050	22.3
Hotspot Test data (Separate 10mm)											
Front side	802.11b	1/2412	98.85%	1.012	0.0072	0.12	18.08	19	1.236	0.009	22
Back side	802.11b	1/2412	98.85%	1.012	0.0798	-0.03	18.08	19	1.236	0.100	22
Left side	802.11b	1/2412	98.85%	1.012	0.026	-0.03	18.08	19	1.236	0.033	22
Top side	802.11b	1/2412	98.85%	1.012	0.00255	-0.04	18.08	19	1.236	0.003	22
Back side	802.11b	6/2437	98.85%	1.012	0.0841	-0.03	17.67	19	1.358	0.116	22
Back side	802.11b	11/2462	98.85%	1.012	0.114	-0.19	17.65	19	1.365	0.157	22
Hotspot Test Data at the worst case with Battery 2#											
Back side	802.11b	11/2462	98.85%	1.012	0.105	-0.03	17.65	19	1.365	0.143	22.3
Hotspot Test Data at the worst case with Battery 3#											
Back side	802.11b	11/2462	98.85%	1.012	0.0895	-0.01	17.65	19	1.365	0.122	22.3

Table 43: SAR of 2.4GHz WIFI for Head and Body (Original report E5/2018/20036)

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).
- 3) Each channel was tested at the lowest data rate.
- 4) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, 802.11g/n OFDM SAR Test is not required.

WiFi 1 Test data											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case											
Left tilted	802.11b	1/2412	99.09%	1.009	0.585	0.1	15.16	16.5	1.361	0.804	22
Body worn Test data at the Worst Case(Separate 15mm)											
Back side	802.11b	1/2412	99.09%	1.009	0.114	-0.12	18.24	19.5	1.337	0.154	22
Hotspot Test data at the Worst Case(Separate 10mm)											
Top side	802.11b	1/2412	99.09%	1.009	0.474	0.03	18.24	19.5	1.337	0.639	22
WiFi 2 Test data											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data at the Worst Case											
Right cheek	802.11b	6/2437	98.85%	1.012	0.034	0.01	17.06	18	1.242	0.042	22
Body worn Test data at the Worst Case(Separate 15mm)											
Back side	802.11b	6/2437	98.85%	1.012	0.0551	0.18	17.67	19	1.358	0.076	22
Hotspot Test data at the Worst Case(Separate 10mm)											
Back side	802.11b	11/2462	98.85%	1.012	0.163	0.03	17.65	19	1.365	0.225	22

Table 44: SAR of 2.4GHz WIFI for Head and Body (Variant)

8.3.16 SAR Result Of 5GHz WIFI

WiFi 1 Test data											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data U-NII-2A (80M)											
Left cheek	802.11ac	58/5290	91.32%	1.095	0.131	0.08	9.21	11	1.510	0.217	22
Left tilted	802.11ac	58/5290	91.32%	1.095	0.178	0.01	9.21	11	1.510	0.294	22
Right cheek	802.11ac	58/5290	91.32%	1.095	0.113	-0.04	9.21	11	1.510	0.187	22
Right tilted	802.11ac	58/5290	91.32%	1.095	0.151	-0.02	9.21	11	1.510	0.250	22
Head Test data U-NII-2C (80M)											
Left cheek	802.11ac	138/5690	91.32%	1.095	0.239	0.03	7.32	9	1.472	0.385	22
Left tilted	802.11ac	138/5690	91.32%	1.095	0.320	0.01	7.32	9	1.472	0.516	22
Right cheek	802.11ac	138/5690	91.32%	1.095	0.148	-0.02	7.32	9	1.472	0.239	22
Right tilted	802.11ac	138/5690	91.32%	1.095	0.176	0.07	7.32	9	1.472	0.284	22
Left tilted	802.11ac	106/5530	91.32%	1.095	0.204	0.01	7.24	9	1.500	0.335	22
Left tilted	802.11ac	122/5610	91.32%	1.095	0.243	0.12	7.14	9	1.535	0.408	22
Head Test data U-NII-3(80M)											
Left cheek	802.11ac	155/5775	91.32%	1.095	0.253	0.09	7.38	9	1.452	0.402	22
Left tilted	802.11ac	155/5775	91.32%	1.095	0.317	-0.12	7.38	9	1.452	0.504	22
Right cheek	802.11ac	155/5775	91.32%	1.095	0.150	0.07	7.38	9	1.452	0.239	22
Right tilted	802.11ac	155/5775	91.32%	1.095	0.176	0.19	7.38	9	1.452	0.280	22
Head Test Data at the worst case with Battery 2#(80M)											
Left tilted	802.11ac	138/5690	91.32%	1.095	0.303	0.02	7.38	9	1.452	0.440	22
Head Test Data at the worst case with Battery 3#(80M)											
Left tilted	802.11ac	138/5690	91.32%	1.095	0.318	0.03	7.38	9	1.452	0.462	22
Body worn Test data U-NII-2A(Separate 15mm)											
Front side	802.11a	56/5280	93.11%	1.074	0.025	0.01	15.41	17	1.442	0.039	22
Back side	802.11a	56/5280	93.11%	1.074	0.057	-0.14	15.41	17	1.442	0.088	22
Back side	802.11a	52/5260	93.11%	1.074	0.0252	0	15.28	17	1.486	0.040	22
Back side	802.11a	64/5320	93.11%	1.074	0.0131	0.05	12.36	14	1.459	0.021	22
Body worn Test data U-NII-2C(Separate 15mm)											
Front side	802.11a	136/5680	93.11%	1.074	0.084	0.12	15.31	17	1.476	0.133	22
Back side	802.11a	136/5680	93.11%	1.074	0.154	0.10	15.31	17	1.476	0.244	22
Back side	802.11a	104/5520	93.11%	1.074	0.0754	0.15	15.18	17	1.521	0.123	22
Back side	802.11a	116/5580	93.11%	1.074	0.0914	0.08	15.28	17	1.486	0.146	22
Back side	802.11a	100/5500	93.11%	1.074	0.0317	0.08	12.33	14	1.469	0.050	22
Back side	802.11a	144/5720	93.11%	1.074	0.048	0.00	12.41	14	1.442	0.074	22
Body worn Test data U-NII-3(Separate 15mm)											
Front side	802.11a	149/5745	93.11%	1.074	0.077	0.13	15.54	17	1.400	0.116	22
Back side	802.11a	149/5745	93.11%	1.074	0.140	0.12	15.54	17	1.400	0.210	22
Back side	802.11a	157/5785	93.11%	1.074	0.109	-0.08	15.29	17	1.483	0.174	22
Back side	802.11a	165/5825	93.11%	1.074	0.103	0.02	15.24	17	1.500	0.166	22
Body worn Data at the worst case with Battery 2#											
Back side	802.11a	136/5680	93.11%	1.074	0.143	0	15.31	17	1.476	0.211	22
Body worn Data at the worst case with Battery 3#											

Back side	802.11a	136/5680	93.11%	1.074	0.142	0.19	15.31	17	1.476	0.210	22
Hotspot Test data U-NII-1(Separate 10mm)											
Front side	802.11a	44/5220	93.11%	1.074	0.032	0.12	15.25	17	1.496	0.051	22
Back side	802.11a	44/5220	93.11%	1.074	0.075	-0.18	15.25	17	1.496	0.121	22
Top side	802.11a	44/5220	93.11%	1.074	0.120	0.12	15.25	17	1.496	0.193	22
Right side	802.11a	44/5220	93.11%	1.074	0.023	-0.03	15.25	17	1.496	0.037	22
Top side	802.11a	36/5180	93.11%	1.074	0.026	0.09	12.27	14	1.489	0.042	22
Top side	802.11a	48/5240	93.11%	1.074	0.0605	0.02	15.02	17	1.578	0.103	22
Hotspot Test data U-NII-3(Separate 10mm)											
Front side	802.11a	149/5745	93.11%	1.074	0.154	0.11	15.54	17	1.400	0.231	22
Back side	802.11a	149/5745	93.11%	1.074	0.231	0.13	15.54	17	1.400	0.347	22
Top side	802.11a	149/5745	93.11%	1.074	0.466	-0.06	15.54	17	1.400	0.700	22
Right side	802.11a	149/5745	93.11%	1.074	0.086	0.07	15.54	17	1.400	0.129	22
Top side	802.11a	157/5785	93.11%	1.074	0.309	-0.09	15.29	17	1.483	0.492	22
Top side	802.11a	165/5825	93.11%	1.074	0.298	-0.03	15.24	17	1.500	0.480	22
Hotspot Test Data at the worst case with Battery 2#											
Top side	802.11a	149/5745	93.11%	1.074	0.376	-0.17	15.54	17	1.400	0.526	22
Hotspot Test Data at the worst case with Battery 3#											
Top side	802.11a	149/5745	93.11%	1.074	0.328	-0.13	15.54	17	1.400	0.459	22
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)10-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
product specific 10gSAR Test data U-NII-2A(Separate 0mm)											
Front side	802.11a	56/5280	93.11%	1.074	0.334	0.09	15.41	17	1.442	0.517	22
Back side	802.11a	56/5280	93.11%	1.074	0.278	-0.16	15.41	17	1.442	0.431	22
Top side	802.11a	56/5280	93.11%	1.074	0.523	0.09	15.41	17	1.442	0.810	22
Right side	802.11a	56/5280	93.11%	1.074	0.03	0.05	15.41	17	1.442	0.046	22
Top side	802.11a	52/5260	93.11%	1.074	0.505	0.08	15.28	17	1.486	0.806	23
Top side	802.11a	64/5320	93.11%	1.074	0.275	0.12	12.36	17	2.911	0.860	24
product specific 10gSAR Test data U-NII-2C(Separate 0mm)											
Front side	802.11a	136/5680	93.11%	1.074	0.881	0	15.31	17	1.476	1.396	22
Back side	802.11a	136/5680	93.11%	1.074	0.563	0.17	15.31	17	1.476	0.892	22
Top side	802.11a	136/5680	93.11%	1.074	0.900	0.01	15.31	17	1.476	1.426	22
Right side	802.11a	136/5680	93.11%	1.074	0.117	0.09	15.31	17	1.476	0.185	22
Top side	802.11a	104/5520	93.11%	1.074	0.743	0.1	15.18	17	1.521	1.213	22
Top side	802.11a	116/5580	93.11%	1.074	0.780	0.05	15.28	17	1.486	1.245	22
Top side	802.11a	100/5500	93.11%	1.074	0.356	0.09	12.33	14	1.469	0.562	22
Top side	802.11a	144/5720	93.11%	1.074	0.347	0.09	12.41	14	1.442	0.537	22
product specific 10gSAR Test Data at the worst case with Battery 2#											
Top side	802.11a	136/5680	93.11%	1.074	0.765	0.18	15.31	17	1.476	1.129	22
product specific 10gSAR Test Data at the worst case with Battery 3#											
Top side	802.11a	136/5680	93.11%	1.074	0.813	0.13	15.31	17	1.476	1.200	22
WiFi 2 Test data											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data U-NII-2A (40M)											
Left cheek	802.11n	54/5270	91.74%	1.09	0.090	0.09	9.79	11	1.321	0.130	22
Left tilted	802.11n	54/5270	91.74%	1.09	0.104	0.08	9.79	11	1.321	0.150	22
Right cheek	802.11n	54/5270	91.74%	1.09	0.262	0.04	9.79	11	1.321	0.377	22
Right tilted	802.11n	54/5270	91.74%	1.09	0.304	0.09	9.79	11	1.321	0.438	22
Right tilted	802.11n	62/5310	91.74%	1.09	0.157	-0.03	8.89	10	1.291	0.221	22

Head Test data U-NII-2C (40M)											
Left cheek	802.11n	134/5670	91.74%	1.09	0.184	0.09	10.13	11	1.222	0.245	22
Left tilted	802.11n	134/5670	91.74%	1.09	0.237	0.02	10.13	11	1.222	0.316	22
Right cheek	802.11n	134/5670	91.74%	1.09	0.355	0.16	10.13	11	1.222	0.473	22
Right tilted	802.11n	134/5670	91.74%	1.09	0.340	0.11	10.13	11	1.222	0.453	22
Right cheek	802.11n	102/5510	91.74%	1.09	0.259	0.13	8.86	10	1.300	0.367	22
Right cheek	802.11n	142/5710	91.74%	1.09	0.294	0.17	9.08	10	1.236	0.396	22
Head Test data U-NII-3 (40M)											
Left cheek	802.11n	151/5755	91.74%	1.09	0.154	0.04	9.75	11	1.334	0.224	22
Left tilted	802.11n	151/5755	91.74%	1.09	0.147	0.05	9.75	11	1.334	0.214	22
Right cheek	802.11n	151/5755	91.74%	1.09	0.273	-0.12	9.75	11	1.334	0.397	22
Right tilted	802.11n	151/5755	91.74%	1.09	0.276	0.18	9.75	11	1.334	0.401	22
Right tilted	802.11n	159/5795	91.74%	1.09	0.199	0.08	9.61	11	1.377	0.299	22
Head Test Data at the worst case with Battery 2#(40M)											
Right cheek	802.11n	134/5670	91.74%	1.09	0.33	0.03	10.13	11	1.222	0.403	22
Head Test Data at the worst case with Battery 3#(40M)											
Right cheek	802.11n	134/5670	91.74%	1.09	0.35	-0.02	10.13	11	1.222	0.428	22
Body worn Test data U-NII-2A(Separate 15mm)											
Front side	802.11a	60/5300	93.14%	1.074	0.037	0.17	13.15	14	1.216	0.048	22
Back side	802.11a	60/5300	93.14%	1.074	0.024	0.15	13.15	14	1.216	0.031	22
Front side	802.11a	52/5260	93.14%	1.074	0.0178	-0.02	12.96	14	1.271	0.024	22
Front side	802.11a	64/5320	93.14%	1.074	0.00876	0.01	10.23	11	1.194	0.011	22
Body worn Test data U-NII-2C(Separate 15mm)											
Front side	802.11a	132/5660	93.14%	1.074	0.065	-0.12	13.35	14	1.161	0.081	22
Back side	802.11a	132/5660	93.14%	1.074	0.052	0.17	13.35	14	1.161	0.065	22
Front side	802.11a	104/5520	93.14%	1.074	0.0346	0.11	12.83	14	1.309	0.049	22
Front side	802.11a	116/5580	93.14%	1.074	0.0295	0.08	13.09	14	1.233	0.039	22
Front side	802.11a	100/5500	93.14%	1.074	0.0127	0.16	9.82	11	1.312	0.018	22
Front side	802.11a	144/5720	93.14%	1.074	0.00424	0.12	10.35	11	1.161	0.005	22
Body worn Test data U-NII-3(Separate 15mm)											
Front side	802.11a	149/5745	93.14%	1.074	0.044	0.09	12.81	14	1.315	0.062	22
Back side	802.11a	149/5745	93.14%	1.074	0.042	0.13	12.81	14	1.315	0.059	22
Front side	802.11a	157/5785	93.14%	1.074	0.0264	0.11	12.52	14	1.406	0.040	22
Front side	802.11a	165/5825	93.14%	1.074	0.0302	-0.05	12.56	14	1.393	0.045	22
Body worn Test Data at the worst case with Battery 2#											
Front side	802.11a	132/5660	93.14%	1.074	0.049	0.15	13.35	14	1.161	0.057	22
Body worn Test Data at the worst case with Battery 3#											
Front side	802.11a	132/5660	93.14%	1.074	0.048	0.11	13.35	14	1.161	0.056	22
Hotspot Test data U-NII-1(Separate 10mm)											
Front side	802.11a	48/5240	93.14%	1.074	0.043	0.01	12.72	14	1.343	0.062	22
Back side	802.11a	48/5240	93.14%	1.074	0.038	0.17	12.72	14	1.343	0.055	22
Top side	802.11a	48/5240	93.14%	1.074	0.016	0.08	12.72	14	1.343	0.023	22
Left side	802.11a	48/5240	93.14%	1.074	0.00316	0.12	12.72	14	1.343	0.005	22
Front side	802.11a	36/5180	93.14%	1.074	0.00813	0	9.64	11	1.368	0.012	22
Back side	802.11a	40/5200	93.14%	1.074	0.0268	-0.05	12.52	14	1.406	0.040	22
Hotspot Test data U-NII-3(Separate 10mm)											
Front side	802.11a	149/5745	93.14%	1.074	0.075	0.14	12.81	14	1.315	0.106	22
Back side	802.11a	149/5745	93.14%	1.074	0.062	-0.09	12.81	14	1.315	0.088	22
Top side	802.11a	149/5745	93.14%	1.074	0.036	0.13	12.81	14	1.315	0.051	22
Left side	802.11a	149/5745	93.14%	1.074	0.022	0.05	12.81	14	1.315	0.031	22
Front side	802.11a	157/5785	93.14%	1.074	0.051	0.11	12.52	14	1.406	0.077	22
Front side	802.11a	165/5825	93.14%	1.074	0.049	-0.06	12.56	14	1.393	0.073	22
Hotspot Test Data at the worst case with Battery 2#											

Front side	802.11a	149/5745	93.14%	1.074	0.068	0.16	12.81	14	1.315	0.089	22
Hotspot Test Data at the worst case with Battery 3#											
Front side	802.11a	149/5745	93.14%	1.074	0.069	0.18	12.81	14	1.315	0.091	22
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)10-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
product specific 10gSAR Test data U-NII-2A(Separate 0mm)											
Front side	802.11a	60/5300	93.14%	1.074	0.245	0.17	13.15	14	1.216	0.320	22
Back side	802.11a	60/5300	93.14%	1.074	0.122	-0.18	13.15	14	1.216	0.159	22
Top side	802.11a	60/5300	93.14%	1.074	0.146	0.11	13.15	14	1.216	0.191	22
Left side	802.11a	60/5300	93.14%	1.074	0.041	0.02	13.15	14	1.216	0.054	22
Front side	802.11a	52/5260	93.14%	1.074	0.225	-0.11	12.96	14	1.271	0.307	22
Front side	802.11a	64/5320	93.14%	1.074	0.119	0	10.23	11	1.194	0.153	22
product specific 10gSAR Test data U-NII-2C(Separate 0mm)											
Front side	802.11a	132/5660	93.14%	1.074	0.315	-0.16	13.35	14	1.161	0.393	22
Back side	802.11a	132/5660	93.14%	1.074	0.199	0.05	13.35	14	1.161	0.248	22
Top side	802.11a	132/5660	93.14%	1.074	0.171	0.018	13.35	14	1.161	0.213	22
Left side	802.11a	132/5660	93.14%	1.074	0.073	-0.15	13.35	14	1.161	0.091	22
Front side	802.11a	104/5520	93.14%	1.074	0.265	0.02	12.83	14	1.309	0.373	22
Front side	802.11a	116/5580	93.14%	1.074	0.27	0.11	13.09	14	1.233	0.358	22
Front side	802.11a	100/5500	93.14%	1.074	0.134	-0.09	9.82	11	1.312	0.189	22
Front side	802.11a	144/5720	93.14%	1.074	0.174	0.16	10.35	11	1.161	0.217	22
product specific 10gSAR Test Data at the worst case with Battery 2#											
Front side	802.11a	132/5660	93.14%	1.074	0.284	0.12	13.35	14	1.161	0.330	22
product specific 10gSAR Test Data at the worst case with Battery 3#											
Front side	802.11a	132/5660	93.14%	1.074	0.301	0.06	13.35	14	1.161	0.350	22

Table 45: SAR of 5GHz WIFI for Head, Body and Limb (Original report E5/2018/20036)

Note:

- 1)The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2)If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg (2W/kg for 10g) then testing at the other channels is not required for such test configuration(s).
- 3)Each channel was tested at the lowest data rate.

WiFi 1 Test data											
Test position	Test mode	Test Ch./Frequency	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scale d factor	Scaled SAR(W/kg)	Liquid Temp .
Head Test data U-NII-2C											
Left tilted	802.11ac-80M	138/5690	91.32%	1.095	0.350	0.01	7.32	9	1.472	0.564	22
Body worn Test data U-NII-2C(Separate 15mm)											
Back side	802.11a	136/5680	93.11%	1.074	0.124	0.09	15.31	17	1.476	0.197	22
Hotspot Test data U-NII-3(Separate 10mm)											
Top side	802.11a	149/5745	93.11%	1.074	0.469	-0.07	15.54	17	1.400	0.705	22
Test position	Test mode	Test Ch./Frequency	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)10-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scale d factor	Scaled SAR(W/kg)	Liquid Temp .
product specific 10gSAR Test data U-NII-2C(Separate 0mm)											
Top side	802.11a	136/5680	93.11%	1.074	0.820	0.05	15.31	17	1.476	1.300	22
WiFi 2 Test data											
Test position	Test mode	Test Ch./Frequency	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)1-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scale d factor	Scaled SAR(W/kg)	Liquid Temp .
Head Test data U-NII-2C											
Right cheek	802.11n40M	134/5670	91.74%	1.09	0.363	0.11	10.13	11	1.222	0.483	22
Body worn Test data U-NII-2C(Separate 15mm)											
Front side	802.11a	132/5660	93.14%	1.074	0.0412	-0.09	13.35	14	1.161	0.051	22
Hotspot Test data U-NII-3(Separate 10mm)											
Front side	802.11a	149/5745	93.14%	1.074	0.0761	0.06	12.81	14	1.315	0.107	22
Test position	Test mode	Test Ch./Frequency	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg)10-g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scale d factor	Scaled SAR(W/kg)	Liquid Temp .
product specific 10gSAR Test data U-NII-2C(Separate 0mm)											
Front side	802.11a	132/5660	93.14%	1.074	0.312	-0.08	13.35	14	1.161	0.389	22

Table 46: SAR of 5GHz WIFI for Head, Body and Limb (Variant)

8.3.17 SAR Result Of Bluetooth

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) ¹ -g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test data											
Left cheek	DH5	39/2441	100.00%	1.000	0.0553	-0.16	10.52	11.7	1.312	0.073	22
Left tilted	DH5	39/2441	100.00%	1.000	0.0298	-0.03	10.52	11.7	1.312	0.039	22
Right cheek	DH5	39/2441	100.00%	1.000	0.0313	0.06	10.52	11.7	1.312	0.041	22
Right tilted	DH5	39/2441	100.00%	1.000	0.0417	0.16	10.52	11.7	1.312	0.055	22
Left cheek	DH5	11/2413	100.00%	1.000	0.0574	0.06	10.43	11.7	1.340	0.077	22
Left cheek	DH5	58/2460	100.00%	1.000	0.06	0.05	10.49	11.7	1.321	0.079	22
Head Test Data at the worst case with Battery 2#											
Left cheek	DH5	58/2460	100.00%	1.000	0.056	0.01	10.49	11.7	1.321	0.074	22.3
Head Test Data at the worst case with Battery 3#											
Left cheek	DH5	58/2460	100.00%	1.000	0.0434	-0.09	10.49	11.7	1.321	0.057	22.3
Body worn Test data(Separate 15mm)											
Front side	DH5	39/2441	100.00%	1.000	0.00859	-0.08	10.52	11.7	1.312	0.011	22
Back side	DH5	39/2441	100.00%	1.000	0.0103	-0.03	10.52	11.7	1.312	0.014	22
Back side	DH5	11/2413	100.00%	1.000	0.011	0.07	10.43	11.7	1.340	0.014	22
Back side	DH5	58/2460	100.00%	1.000	0.00714	0.09	10.49	11.7	1.321	0.009	22
Body Test Data at the worst case with Battery 2#											
Back side	DH5	11/2413	100.00%	1.000	0.00978	-0.05	10.43	11.7	1.340	0.013	22.3
Body Test Data at the worst case with Battery 3#											
Back side	DH5	11/2413	100.00%	1.000	0.00909	-0.01	10.43	11.7	1.340	0.012	22.3
Hotspot Test data (Separate 10mm)											
Front side	DH5	39/2441	100.00%	1.000	0.0122	-0.17	10.52	11.7	1.312	0.016	22
Back side	DH5	39/2441	100.00%	1.000	0.0141	-0.05	10.52	11.7	1.312	0.019	22
Right side	DH5	39/2441	100.00%	1.000	0.00629	-0.02	10.52	11.7	1.312	0.008	22
Top side	DH5	39/2441	100.00%	1.000	0.0311	-0.03	10.52	11.7	1.312	0.041	22
Top side	DH5	11/2413	100.00%	1.000	0.0247	-0.02	10.43	11.7	1.340	0.033	22
Top side	DH5	58/2460	100.00%	1.000	0.0264	-0.04	10.49	11.7	1.321	0.035	22
Hotspot Test Data at the worst case with Battery 2#											
Top side	DH5	39/2441	100.00%	1.000	0.0256	-0.16	10.52	11.7	1.312	0.034	22.3
Hotspot Test Data at the worst case with Battery 3#											
Top side	DH5	39/2441	100.00%	1.000	0.0219	-0.02	10.52	11.7	1.312	0.029	22.3

Table 47: SAR of Bluetooth for Head & Body (Original Report E5/2018/20036)

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B
- 2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s).

Ant1 Test data											
Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) ¹ -g	Power drift(dB)	Conducted power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR(W/kg)	Liquid Temp.
Head Test Data at the worst case											
Left cheek	DH5	58/2460	100.00 %	1.000	0.0571	0.08	10.49	11.7	1.321	0.075	22
Body Test Data at the worst case(Separate 15mm)											
Back side	DH5	11/2413	100.00 %	1.000	0.00967	0.09	10.43	11.7	1.340	0.013	22
Hotspot Test Data at the worst case(Separate 10mm)											
Top side	DH5	39/2441	100.00 %	1.000	0.0329	0.13	10.52	11.7	1.312	0.043	22

Table 48: SAR of Bluetooth for Head & Body (Variant)

8.4 Multiple Transmitter Evaluation

8.4.1 Simultaneous SAR SAR test evaluation

1) Simultaneous Transmission Combination

NO.	Simultaneous TX Combination	Head	Body-worn	Hotspot	Product Specific 10-g (0mm)
1	GSM Voice(Ant 1) + BT	Yes	Yes	N/A	Yes
2	GSM DATA(Ant 1) + BT	N/A	Yes	Yes	Yes
3	GSM Voice(Ant 2) + BT	Yes	Yes	N/A	Yes
4	GSM DATA (Ant 2)+ BT	N/A	Yes	Yes	Yes
5	GSM Voice(Ant 1) + Wi-Fi 2.4G (Ant 1)/ Wi-Fi 2.4G (Ant 2)/ Wi- Fi 2.4G MIMO	Yes	Yes	N/A	Yes
6	GSM DATA(Ant 1) + Wi-Fi 2.4G (Ant 1)/ Wi-Fi 2.4G (Ant 2)/ Wi-Fi 2.4G MIMO	N/A	Yes	Yes	Yes
7	GSM Voice(Ant 2) + Wi-Fi 2.4G (Ant 1)/ Wi-Fi 2.4G (Ant 2)/ Wi-Fi 2.4G MIMO	Yes	Yes	N/A	Yes
8	GSM DATA(Ant 2) + Wi-Fi 2.4G (Ant 1)/ Wi-Fi 2.4G (Ant 2)/ Wi-Fi 2.4G MIMO	N/A	Yes	Yes	Yes
9	UMTS (Ant 1) + BT	Yes	Yes	Yes	Yes
10	UMTS (Ant 2) + BT	Yes	Yes	Yes	Yes
11	UMTS (Ant 1) + Wi-Fi 2.4G (Ant 1)/ Wi-Fi 2.4G (Ant 2)/ Wi-Fi 2.4G MIMO	Yes	Yes	Yes	Yes
12	UMTS (Ant 2) + Wi-Fi 2.4G (Ant 1)/ Wi-Fi 2.4G (Ant 2)/ Wi-Fi 2.4G MIMO	Yes	Yes	Yes	Yes
13	LTE (Ant 1) + Wi-Fi 2.4G (Ant 1)/ Wi-Fi 2.4G (Ant 2)/ Wi-Fi 2.4G MIMO	Yes	Yes	Yes	Yes
14	LTE(Ant 1) + BT	Yes	Yes	Yes	Yes
15	LTE (Ant 2) + Wi-Fi 2.4G (Ant 1)/ Wi-Fi 2.4G (Ant 2)/ Wi-Fi 2.4G MIMO	Yes	Yes	Yes	Yes
16	LTE (Ant 2) + BT	Yes	Yes	Yes	Yes
17	GSM Voice(Ant 1) + Wi-Fi 5G (Ant 1)/ Wi-Fi 5G (Ant 2)/ Wi-Fi 5G MIMO	Yes	Yes	N/A	Yes
18	GSM DATA(Ant 1) + Wi-Fi 5G (Ant 1)/ Wi-Fi 5G (Ant 2)/ Wi- Fi 5G MIMO	N/A	Yes	Yes	Yes
19	GSM Voice(Ant 2) + Wi-Fi 5G (Ant 1)/ Wi-Fi 5G (Ant 2)/ Wi-Fi 5G MIMO	Yes	Yes	N/A	Yes
20	GSM DATA(Ant 2) + Wi-Fi 5G (Ant 1)/ Wi-Fi 5G (Ant 2)/ Wi-Fi 5G MIMO	N/A	Yes	Yes	Yes
21	UMTS (Ant 1) + Wi-Fi 5G (Ant 1)/ Wi-Fi 5G (Ant 2)/ Wi-Fi 5G MIMO	Yes	Yes	Yes	Yes
22	UMTS (Ant 2) + Wi-Fi 5G (Ant 1)/ Wi-Fi 5G (Ant 2)/ Wi-Fi 5G MIMO	Yes	Yes	Yes	Yes
23	LTE (Ant 1) + Wi-Fi 5G (Ant 1)/ Wi-Fi 5G (Ant 2)/ Wi-Fi 5G MIMO	Yes	Yes	Yes	Yes
24	LTE (Ant 2) + Wi-Fi 5G (Ant 1)/ Wi-Fi 5G (Ant 2)/ Wi-Fi 5G MIMO	Yes	Yes	Yes	Yes
25	GSM Voice(Ant 1) + Wi-Fi 2.4G (Ant 1) + Wi-Fi 5G (Ant 2)	Yes	Yes	N/A	Yes
26	GSM DATA(Ant 1) + Wi-Fi 2.4G (Ant 1) + Wi-Fi 5G (Ant 2)	N/A	Yes	Yes	Yes
27	GSM Voice(Ant 2) + Wi-Fi 2.4G (Ant 1) + Wi-Fi 5G (Ant 2)	Yes	Yes	N/A	Yes
28	GSM DATA(Ant 2) + Wi-Fi 2.4G (Ant 1) + Wi-Fi 5G (Ant 2)	N/A	Yes	Yes	Yes
29	UMTS (Ant 1) + Wi-Fi 2.4G (Ant 1) + Wi-Fi 5G (Ant 2)	Yes	Yes	Yes	Yes
30	UMTS (Ant 2) + Wi-Fi 2.4G (Ant 1) + Wi-Fi 5G (Ant 2)	Yes	Yes	Yes	Yes

31	LTE (Ant 1) + Wi-Fi 2.4G (Ant 1) + Wi-Fi 5G (Ant 2)	Yes	Yes	Yes	Yes
32	LTE (Ant 2) + Wi-Fi 2.4G (Ant 1) + Wi-Fi 5G (Ant 2)	Yes	Yes	Yes	Yes
33	GSM Voice(Ant 1) + BT+ Wi-Fi 5G (Ant1/ Ant2/ MIMO)	Yes	Yes	N/A	Yes
34	GSM DATA(Ant 1) + BT+ Wi-Fi 5G (Ant1/ Ant2/ MIMO)	N/A	Yes	Yes	Yes
35	GSM Voice(Ant 2) + BT+ Wi-Fi 5G (Ant1/ Ant2/ MIMO)	Yes	Yes	N/A	Yes
36	GSM DATA (Ant 2)+ BT+ Wi-Fi 5G (Ant1/ Ant2/ MIMO)	N/A	Yes	Yes	Yes
37	UMTS (Ant 1) + BT+ Wi-Fi 5G (Ant1/ Ant2/ MIMO)	Yes	Yes	Yes	Yes
38	UMTS (Ant 2) + BT+ Wi-Fi 5G (Ant1/ Ant2/ MIMO)	Yes	Yes	Yes	Yes
39	LTE (Ant 1) + BT+ Wi-Fi 5G (Ant1/ Ant2/ MIMO)	Yes	Yes	Yes	Yes
40	LTE (Ant 2) + BT+ Wi-Fi 5G (Ant1/ Ant2/ MIMO)	Yes	Yes	Yes	Yes

Note:

- 1) Neither Wi-Fi 2.4G Ant.1 nor Wi-Fi 2.4G Ant.2 can transmit simultaneously with Bluetooth.
- 2) Wi-Fi 5G Ant.1 can transmit simultaneously with Bluetooth and Ant.2 also can transmit simultaneously with Bluetooth.
- 3) Wi-Fi 2.4G has two TX antennas. Wi-Fi 2.4G 802.11g/n support 2*2 CDD/MIMO function.
- 4) Wi-Fi 5G has two TX antennas. Wi-Fi 5G 802.11 a/n/ac support 2*2 CDD/MIMO function.
- 5) Wi-Fi 2.4G& Wi-Fi 5G can't work at same mode, but they can transmit simultaneously at different modes (Wi-Fi station/P-to-P) by using different Wi-Fi antennas. Only Wi-Fi 2.4G Ant1 station mode and Wi-Fi 5G Ant2 P-to-P mode or Wi-Fi 2.4G Ant1 P-to-P mode and Wi-Fi 5G Ant2 P-to-P mode can transmit simultaneously.
- 6) The device does not support DTM function.
- 7) * VoLTE or pre-installed VOIP applications are considered.
- 8) The 2G/3G/4G Main Antenna and 2G/3G/4G Second Antenna can't transmit simultaneously.
- 9) For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.
- 10) The device supports Vo-WIFI function.
- 11) WiFi 5G ANT1 and WiFi 2.4G ANT2 can not transmit simultaneously.

WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	Σ1-g SAR ①+②	Σ1-g SAR ①+③	Σ1-g SAR ①+④	Σ1-g SAR ①+⑤	Case NO.	
WCDMA B4	Head	Left Cheek	0.096	0.504	0.009	0.513	0.079	0.600	0.105	0.609	0.175	N/A	
		Left Tilt	0.034	0.804	0.004	0.808	0.039	0.838	0.038	0.842	0.073	N/A	
		Right Cheek	0.132	0.293	0.059	0.352	0.041	0.425	0.191	0.484	0.173	N/A	
		Right Tilt	0.041	0.389	0.028	0.417	0.055	0.430	0.069	0.458	0.096	N/A	
	Body-worn	Front	0.461	0.125	0.007	0.132	0.011	0.586	0.468	0.593	0.472	N/A	
		Back	0.496	0.182	0.076	0.258	0.014	0.678	0.572	0.754	0.510	N/A	
	Hotspot	Front	0.358	0.219	0.009	0.228	0.016	0.577	0.367	0.586	0.374	N/A	
		Back	0.314	0.293	0.225	0.518	0.019	0.607	0.539	0.832	0.333	N/A	
		Left	0.045	0.000	0.033	0.033	0	0.045	0.078	0.078	0.045	N/A	
		Right	0.024	0.178	0.000	0.178	0.008	0.202	0.024	0.202	0.032	N/A	
		Top	0	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A	
		Bottom	0.599	0.000	0.000	0.000	0	0.599	0.599	0.599	0.599	0.599	N/A
	Limbs	Front	/	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	/	N/A
		Top	/	/	/	/	/	/	/	/	/	/	N/A
		Bottom	2.675	/	/	/	/	/	2.68	2.68	2.68	2.68	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	Σ1-g SAR ①+②	Σ1-g SAR ①+③	Σ1-g SAR ①+④	Σ1-g SAR ①+⑤	Case NO.	
	Head	Left Cheek	0.496	0.504	0.009	0.513	0.079	1.000	0.505	1.009	0.575	N/A	
		Left Tilt	0.325	0.804	0.004	0.808	0.039	1.129	0.329	1.133	0.364	N/A	
		Right Cheek	0.656	0.293	0.059	0.352	0.041	0.949	0.715	1.008	0.697	N/A	
		Right Tilt	0.691	0.389	0.028	0.417	0.055	1.080	0.719	1.108	0.746	N/A	
	Body-worn	Front	0.249	0.125	0.007	0.132	0.011	0.374	0.256	0.381	0.260	N/A	
		Back	0.343	0.182	0.076	0.258	0.014	0.525	0.419	0.601	0.357	N/A	
	Hotspot	Front	0.212	0.219	0.009	0.228	0.016	0.431	0.221	0.440	0.228	N/A	
Back		0.282	0.293	0.225	0.518	0.019	0.575	0.507	0.800	0.301	N/A		
Left		0.212	0.000	0.033	0.033	0	0.212	0.245	0.245	0.212	N/A		
Right		0.025	0.178	0.000	0.178	0.008	0.203	0.025	0.203	0.033	N/A		
Top		0.383	0.641	0.003	0.644	0.043	1.024	0.386	1.027	0.426	N/A		
Bottom		0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	0.000	N/A	
Limbs	Front	/	/	/	/	/	/	/	/	/	/	N/A	
	Back	/	/	/	/	/	/	/	/	/	/	N/A	
	Left	/	/	/	/	/	/	/	/	/	/	N/A	
	Right	/	/	/	/	/	/	/	/	/	/	N/A	
	Top	/	/	/	/	/	/	/	/	/	/	N/A	
	Bottom	/	/	/	/	/	/	/	/	/	/	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	Σ1-g SAR ①+②	Σ1-g SAR ①+③	Σ1-g SAR ①+④	Σ1-g SAR ①+⑤	Case NO.	
WCDMA	Head	Left Cheek	0.266	0.504	0.009	0.513	0.079	0.770	0.275	0.779	0.345	N/A	

B5		Left Tilt	0.138	0.804	0.004	0.808	0.039	0.942	0.142	0.946	0.177	N/A
		Right Cheek	0.314	0.293	0.059	0.352	0.041	0.607	0.373	0.666	0.355	N/A
		Right Tilt	0.141	0.389	0.028	0.417	0.055	0.530	0.169	0.558	0.196	N/A
	Body-worn	Front	0.414	0.125	0.007	0.132	0.011	0.539	0.421	0.546	0.425	N/A
		Back	0.497	0.182	0.076	0.258	0.014	0.679	0.573	0.755	0.511	N/A
	Hotspot	Front	0.729	0.219	0.009	0.228	0.016	0.948	0.738	0.957	0.745	N/A
		Back	0.676	0.293	0.225	0.518	0.019	0.969	0.901	1.194	0.695	N/A
		Left	0.123	0.000	0.033	0.033	0	0.123	0.156	0.156	0.123	N/A
		Right	0.448	0.178	0.000	0.178	0.008	0.626	0.448	0.626	0.456	N/A
		Top	0	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A
		Bottom	0.729	0.000	0.000	0.000	0	0.729	0.729	0.729	0.729	N/A
	Limbs	Front	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	N/A
		Top	/	/	/	/	/	/	/	/	/	N/A
		Bottom	/	/	/	/	/	/	/	/	/	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR①+④	∑1-g SAR ①+⑤	Case NO.
	Head	Left Cheek	0.571	0.504	0.009	0.513	0.079	1.075	0.580	1.084	0.650	N/A
		Left Tilt	0.456	0.804	0.004	0.808	0.039	1.260	0.460	1.264	0.495	N/A
		Right Cheek	0.493	0.293	0.059	0.352	0.041	0.786	0.552	0.845	0.534	N/A
		Right Tilt	0.432	0.389	0.028	0.417	0.055	0.821	0.460	0.849	0.487	N/A
	Body-worn	Front	0.232	0.125	0.007	0.132	0.011	0.357	0.239	0.364	0.243	N/A
		Back	0.262	0.182	0.076	0.258	0.014	0.444	0.338	0.520	0.276	N/A
	Hotspot	Front	0.237	0.219	0.009	0.228	0.016	0.456	0.246	0.465	0.253	N/A
		Back	0.212	0.293	0.225	0.518	0.019	0.505	0.437	0.730	0.231	N/A
Left		0.073	0.000	0.033	0.033	0	0.073	0.106	0.106	0.073	N/A	
Right		0.015	0.178	0.000	0.178	0.008	0.193	0.015	0.193	0.023	N/A	
Top		0.162	0.641	0.003	0.644	0.043	0.803	0.165	0.806	0.205	N/A	
Bottom		0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	N/A	
Limbs	Front	/	/	/	/	/	/	/	/	/	N/A	
	Back	/	/	/	/	/	/	/	/	/	N/A	
	Left	/	/	/	/	/	/	/	/	/	N/A	
	Right	/	/	/	/	/	/	/	/	/	N/A	
	Top	/	/	/	/	/	/	/	/	/	N/A	
	Bottom	/	/	/	/	/	/	/	/	/	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR ①+④	∑1-g SAR ①+⑤	Case NO.
LTE B2	Head	Left Cheek	0.147	0.504	0.009	0.513	0.079	0.651	0.156	0.660	0.226	N/A
		Left Tilt	0.068	0.804	0.004	0.808	0.039	0.872	0.072	0.876	0.107	N/A
		Right Cheek	0.109	0.293	0.059	0.352	0.041	0.402	0.168	0.461	0.150	N/A
		Right Tilt	0.074	0.389	0.028	0.417	0.055	0.463	0.102	0.491	0.129	N/A

	Body-worn	Front	0.475	0.125	0.007	0.132	0.011	0.600	0.482	0.607	0.486	N/A
		Back	0.445	0.182	0.076	0.258	0.014	0.627	0.521	0.703	0.459	N/A
	Hotspot	Front	0.303	0.219	0.009	0.228	0.016	0.522	0.312	0.531	0.319	N/A
		Back	0.29	0.293	0.225	0.518	0.019	0.583	0.515	0.808	0.309	N/A
		Left	0.087	0.000	0.033	0.033	0	0.087	0.120	0.120	0.087	N/A
		Right	0.026	0.178	0.000	0.178	0.008	0.204	0.026	0.204	0.034	N/A
		Top	0	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A
		Bottom	0.637	0.000	0.000	0.000	0	0.637	0.637	0.637	0.637	N/A
	Limbs	Front	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	N/A
		Top	/	/	/	/	/	/	/	/	/	N/A
		Bottom	2.961	/	/	/	/	2.96	2.96	2.96	2.96	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR①+④	∑1-g SAR ①+⑤	Case NO.
	Head	Left Cheek	0.438	0.504	0.009	0.513	0.079	0.942	0.447	0.951	0.517	N/A
		Left Tilt	0.285	0.804	0.004	0.808	0.039	1.089	0.289	1.093	0.324	N/A
		Right Cheek	0.479	0.293	0.059	0.352	0.041	0.772	0.538	0.831	0.520	N/A
		Right Tilt	0.549	0.389	0.028	0.417	0.055	0.938	0.577	0.966	0.604	N/A
	Body-worn	Front	0.191	0.125	0.007	0.132	0.011	0.316	0.198	0.323	0.202	N/A
		Back	0.254	0.182	0.076	0.258	0.014	0.436	0.330	0.512	0.268	N/A
	Hotspot	Front	0.173	0.219	0.009	0.228	0.016	0.392	0.182	0.401	0.189	N/A
		Back	0.226	0.293	0.225	0.518	0.019	0.519	0.451	0.744	0.245	N/A
		Left	0.160	0.000	0.033	0.033	0	0.160	0.193	0.193	0.160	N/A
Right		0.049	0.178	0.000	0.178	0.008	0.227	0.049	0.227	0.057	N/A	
Top		0.374	0.641	0.003	0.644	0.043	1.015	0.377	1.018	0.417	N/A	
Bottom		0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	N/A	
Limbs	Front	/	/	/	/	/	/	/	/	/	N/A	
	Back	/	/	/	/	/	/	/	/	/	N/A	
	Left	/	/	/	/	/	/	/	/	/	N/A	
	Right	/	/	/	/	/	/	/	/	/	N/A	
	Top	/	/	/	/	/	/	/	/	/	N/A	
	Bottom	/	/	/	/	/	/	/	/	/	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR ①+④	∑1-g SAR ①+⑤	Case NO.
LTE B4	Head	Left Cheek	0.18	0.504	0.009	0.513	0.079	0.684	0.189	0.693	0.259	N/A
		Left Tilt	0.064	0.804	0.004	0.808	0.039	0.868	0.068	0.872	0.103	N/A
		Right Cheek	0.131	0.293	0.059	0.352	0.041	0.424	0.190	0.483	0.172	N/A
		Right Tilt	0.092	0.389	0.028	0.417	0.055	0.481	0.120	0.509	0.147	N/A
	Body-worn	Front	0.595	0.125	0.007	0.132	0.011	0.720	0.602	0.727	0.606	N/A
		Back	0.392	0.182	0.076	0.258	0.014	0.574	0.468	0.650	0.406	N/A
	Hotspot	Front	0.363	0.219	0.009	0.228	0.016	0.582	0.372	0.591	0.379	N/A
		Back	0.235	0.293	0.225	0.518	0.019	0.528	0.460	0.753	0.254	N/A

		Left	0.085	0.000	0.033	0.033	0	0.085	0.118	0.118	0.085	N/A
		Right	0.025	0.178	0.000	0.178	0.008	0.203	0.025	0.203	0.033	N/A
		Top	0	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A
		Bottom	0.549	0.000	0.000	0.000	0	0.549	0.549	0.549	0.549	N/A
	Limbs	Front	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	N/A
		Top	/	/	/	/	/	/	/	/	/	N/A
		Bottom	2.824	/	/	/	/	2.82	2.82	2.82	2.82	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR①+④	∑1-g SAR ①+⑤	Case NO.
	Head	Left Cheek	0.481	0.504	0.009	0.513	0.079	0.985	0.490	0.994	0.560	N/A
		Left Tilt	0.323	0.804	0.004	0.808	0.039	1.127	0.327	1.131	0.362	N/A
		Right Cheek	0.685	0.293	0.059	0.352	0.041	0.978	0.744	1.037	0.726	N/A
		Right Tilt	0.668	0.389	0.028	0.417	0.055	1.057	0.696	1.085	0.723	N/A
	Body-worn	Front	0.247	0.125	0.007	0.132	0.011	0.372	0.254	0.379	0.258	N/A
		Back	0.290	0.182	0.076	0.258	0.014	0.472	0.366	0.548	0.304	N/A
	Hotspot	Front	0.177	0.219	0.009	0.228	0.016	0.396	0.186	0.405	0.193	N/A
		Back	0.249	0.293	0.225	0.518	0.019	0.542	0.474	0.767	0.268	N/A
		Left	0.229	0.000	0.033	0.033	0	0.229	0.262	0.262	0.229	N/A
		Right	0.025	0.178	0.000	0.178	0.008	0.203	0.025	0.203	0.033	N/A
		Top	0.332	0.641	0.003	0.644	0.043	0.973	0.335	0.976	0.375	N/A
		Bottom	0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	N/A
	Limbs	Front	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	N/A
Top		/	/	/	/	/	/	/	/	/	N/A	
Bottom		/	/	/	/	/	/	/	/	/	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR ①+④	∑1-g SAR ①+⑤	Case NO.
LTE B5	Head	Left Cheek	0.221	0.504	0.009	0.513	0.079	0.725	0.230	0.734	0.300	N/A
		Left Tilt	0.097	0.804	0.004	0.808	0.039	0.901	0.101	0.905	0.136	N/A
		Right Cheek	0.22	0.293	0.059	0.352	0.041	0.513	0.279	0.572	0.261	N/A
		Right Tilt	0.116	0.389	0.028	0.417	0.055	0.505	0.144	0.533	0.171	N/A
	Body-worn	Front	0.348	0.125	0.007	0.132	0.011	0.473	0.355	0.480	0.359	N/A
		Back	0.448	0.182	0.076	0.258	0.014	0.630	0.524	0.706	0.462	N/A
	Hotspot	Front	0.517	0.219	0.009	0.228	0.016	0.736	0.526	0.745	0.533	N/A
		Back	0.629	0.293	0.225	0.518	0.019	0.922	0.854	1.147	0.648	N/A
		Left	0.104	0.000	0.033	0.033	0	0.104	0.137	0.137	0.104	N/A
		Right	0.376	0.178	0.000	0.178	0.008	0.554	0.376	0.554	0.384	N/A
		Top	0	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A
		Bottom	0.358	0.000	0.000	0.000	0	0.358	0.358	0.358	0.358	N/A

	Exposure position	Test position	①	②	③	④	⑤	∑1-g	∑1-g	∑1-g	∑1-g	Case NO.	
			WWAN Ant.2 SAR	2.4G WIFI1 SAR	2.4G WIFI2 SAR	2.4G MIMO SAR	BT SAR	SAR ①+②	SAR ①+③	SAR ①+④	SAR ①+⑤		
	Head	Left Cheek	0.489	0.504	0.009	0.513	0.079	0.993	0.498	1.002	0.568	N/A	
		Left Tilt	0.415	0.804	0.004	0.808	0.039	1.219	0.419	1.223	0.454	N/A	
		Right Cheek	0.437	0.293	0.059	0.352	0.041	0.730	0.496	0.789	0.478	N/A	
		Right Tilt	0.439	0.389	0.028	0.417	0.055	0.828	0.467	0.856	0.494	N/A	
	Body-worn	Front	0.250	0.125	0.007	0.132	0.011	0.375	0.257	0.382	0.261	N/A	
		Back	0.219	0.182	0.076	0.258	0.014	0.401	0.295	0.477	0.233	N/A	
	Hotspot	Front	0.260	0.219	0.009	0.228	0.016	0.479	0.269	0.488	0.276	N/A	
		Back	0.180	0.293	0.225	0.518	0.019	0.473	0.405	0.698	0.199	N/A	
		Left	0.091	0.000	0.033	0.033	0	0.091	0.124	0.124	0.091	N/A	
		Right	0.050	0.178	0.000	0.178	0.008	0.228	0.050	0.228	0.058	N/A	
		Top	0.131	0.641	0.003	0.644	0.043	0.772	0.134	0.775	0.174	N/A	
		Bottom	0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	0.000	N/A
	Limbs	Front	/	/	/	/	/	/	/	/	/	N/A	
		Back	/	/	/	/	/	/	/	/	/	N/A	
		Left	/	/	/	/	/	/	/	/	/	N/A	
		Right	/	/	/	/	/	/	/	/	/	N/A	
		Top	/	/	/	/	/	/	/	/	/	N/A	
		Bottom	/	/	/	/	/	/	/	/	/	/	N/A
	WWAN Band	Exposure position	Test position	①	②	③	④	⑤	∑1-g	∑1-g	∑1-g	∑1-g	Case NO.
				WWAN Ant.1 SAR	2.4G WIFI1 SAR	2.4G WIFI2 SAR	2.4G MIMO SAR	BT SAR	SAR ①+②	SAR ①+③	SAR ①+④	SAR ①+⑤	
	LTE B17	Head	Left Cheek	0.133	0.504	0.009	0.513	0.079	0.637	0.142	0.646	0.212	N/A
Left Tilt			0.079	0.804	0.004	0.808	0.039	0.883	0.083	0.887	0.118	N/A	
Right Cheek			0.161	0.293	0.059	0.352	0.041	0.454	0.220	0.513	0.202	N/A	
Right Tilt			0.074	0.389	0.028	0.417	0.055	0.463	0.102	0.491	0.129	N/A	
Body-worn		Front	0.26	0.125	0.007	0.132	0.011	0.385	0.267	0.392	0.271	N/A	
		Back	0.289	0.182	0.076	0.258	0.014	0.471	0.365	0.547	0.303	N/A	
Hotspot		Front	0.343	0.219	0.009	0.228	0.016	0.562	0.352	0.571	0.359	N/A	
		Back	0.427	0.293	0.225	0.518	0.019	0.720	0.652	0.945	0.446	N/A	
		Left	0.11	0.000	0.033	0.033	0	0.110	0.143	0.143	0.110	N/A	
		Right	0.276	0.178	0.000	0.178	0.008	0.454	0.276	0.454	0.284	N/A	
		Top	0	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A	
		Bottom	0.225	0.000	0.000	0.000	0	0.225	0.225	0.225	0.225	N/A	
Limbs		Front	/	/	/	/	/	/	/	/	/	N/A	
		Back	/	/	/	/	/	/	/	/	/	N/A	
		Left	/	/	/	/	/	/	/	/	/	N/A	
		Right	/	/	/	/	/	/	/	/	/	N/A	
		Top	/	/	/	/	/	/	/	/	/	N/A	
		Bottom	/	/	/	/	/	/	/	/	/	N/A	
Exposure position		Test position	①	②	③	④	⑤	∑1-g	∑1-g	∑1-g	∑1-g	Case NO.	
			WWAN Ant.2 SAR	2.4G WIFI1 SAR	2.4G WIFI2 SAR	2.4G MIMO SAR	BT SAR	SAR ①+②	SAR ①+③	SAR ①+④	SAR ①+⑤		
Head		Left Cheek	0.500	0.504	0.009	0.513	0.079	1.004	0.509	1.013	0.579	N/A	

		Left Tilt	0.418	0.804	0.004	0.808	0.039	1.222	0.422	1.226	0.457	N/A	
		Right Cheek	0.715	0.293	0.059	0.352	0.041	1.008	0.774	1.067	0.756	N/A	
		Right Tilt	0.401	0.389	0.028	0.417	0.055	0.790	0.429	0.818	0.456	N/A	
	Body-worn	Front	0.239	0.125	0.007	0.132	0.011	0.364	0.246	0.371	0.250	N/A	
		Back	0.197	0.182	0.076	0.258	0.014	0.379	0.273	0.455	0.211	N/A	
	Hotspot	Front	0.296	0.219	0.009	0.228	0.016	0.515	0.305	0.524	0.312	N/A	
		Back	0.218	0.293	0.225	0.518	0.019	0.511	0.443	0.736	0.237	N/A	
		Left	0.080	0.000	0.033	0.033	0	0.080	0.113	0.113	0.080	N/A	
		Right	0.015	0.178	0.000	0.178	0.008	0.193	0.015	0.193	0.023	N/A	
		Top	0.161	0.641	0.003	0.644	0.043	0.802	0.164	0.805	0.204	N/A	
	Limbs	Bottom	0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	N/A	
		Front	/	/	/	/	/	/	/	/	/	N/A	
		Back	/	/	/	/	/	/	/	/	/	N/A	
		Left	/	/	/	/	/	/	/	/	/	N/A	
		Right	/	/	/	/	/	/	/	/	/	N/A	
		Top	/	/	/	/	/	/	/	/	/	N/A	
	WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR ①+④	∑1-g SAR ①+⑤	Case NO.
			Head	Left Cheek	0.166	0.504	0.009	0.513	0.079	0.670	0.175	0.679	0.245
Left Tilt				0.099	0.804	0.004	0.808	0.039	0.903	0.103	0.907	0.138	N/A
Right Cheek				0.263	0.293	0.059	0.352	0.041	0.556	0.322	0.615	0.304	N/A
Right Tilt				0.105	0.389	0.028	0.417	0.055	0.494	0.133	0.522	0.160	N/A
Body-worn			Front	0.222	0.125	0.007	0.132	0.011	0.347	0.229	0.354	0.233	N/A
			Back	0.45	0.182	0.076	0.258	0.014	0.632	0.526	0.708	0.464	N/A
Hotspot			Front	0.381	0.219	0.009	0.228	0.016	0.600	0.390	0.609	0.397	N/A
			Back	0.655	0.293	0.225	0.518	0.019	0.948	0.880	1.173	0.674	N/A
			Left	0.128	0.000	0.033	0.033	0	0.128	0.161	0.161	0.128	N/A
			Right	0.383	0.178	0.000	0.178	0.008	0.561	0.383	0.561	0.391	N/A
			Top	0	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A
Limbs			Bottom	0.373	0.000	0.000	0.000	0	0.373	0.373	0.373	0.373	N/A
			Front	/	/	/	/	/	/	/	/	/	N/A
			Back	/	/	/	/	/	/	/	/	/	N/A
			Left	/	/	/	/	/	/	/	/	/	N/A
			Right	/	/	/	/	/	/	/	/	/	N/A
			Top	/	/	/	/	/	/	/	/	/	N/A
LTE B26	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR ①+④	∑1-g SAR ①+⑤	Case NO.	
		Head	Left Cheek	0.660	0.504	0.009	0.513	0.079	1.164	0.669	1.173	0.739	N/A
			Left Tilt	0.419	0.804	0.004	0.808	0.039	1.223	0.423	1.227	0.458	N/A
			Right Cheek	0.444	0.293	0.059	0.352	0.041	0.737	0.503	0.796	0.485	N/A
			Right Tilt	0.345	0.389	0.028	0.417	0.055	0.734	0.373	0.762	0.400	N/A

	Body-worn	Front	0.221	0.125	0.007	0.132	0.011	0.346	0.228	0.353	0.232	N/A	
		Back	0.165	0.182	0.076	0.258	0.014	0.347	0.241	0.423	0.179	N/A	
	Hotspot	Front	0.185	0.219	0.009	0.228	0.016	0.404	0.194	0.413	0.201	N/A	
		Back	0.262	0.293	0.225	0.518	0.019	0.555	0.487	0.780	0.281	N/A	
		Left	0.064	0.000	0.033	0.033	0	0.064	0.097	0.097	0.064	N/A	
		Right	0.012	0.178	0.000	0.178	0.008	0.190	0.012	0.190	0.020	N/A	
		Top	0.141	0.641	0.003	0.644	0.043	0.782	0.144	0.785	0.184	N/A	
		Bottom	0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	0.000	N/A
	Limbs	Front	/	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	/	N/A
		Top	/	/	/	/	/	/	/	/	/	/	N/A
		Bottom	/	/	/	/	/	/	/	/	/	/	N/A
	WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR ①+④	∑1-g SAR ①+⑤	Case NO.
	LTE B38	Head	Left Cheek	0.019	0.504	0.009	0.513	0.079	0.523	0.028	0.532	0.098	N/A
			Left Tilt	0.009	0.804	0.004	0.808	0.039	0.813	0.013	0.817	0.048	N/A
			Right Cheek	0.073	0.293	0.059	0.352	0.041	0.366	0.132	0.425	0.114	N/A
Right Tilt			0.017	0.389	0.028	0.417	0.055	0.406	0.045	0.434	0.072	N/A	
Body-worn		Front	0.255	0.125	0.007	0.132	0.011	0.380	0.262	0.387	0.266	N/A	
		Back	0.144	0.182	0.076	0.258	0.014	0.326	0.220	0.402	0.158	N/A	
Hotspot		Front	0.285	0.219	0.009	0.228	0.016	0.504	0.294	0.513	0.301	N/A	
		Back	0.214	0.293	0.225	0.518	0.019	0.507	0.439	0.732	0.233	N/A	
		Left	0.079	0.000	0.033	0.033	0	0.079	0.112	0.112	0.079	N/A	
		Right	0.055	0.178	0.000	0.178	0.008	0.233	0.055	0.233	0.063	N/A	
		Top	0.000	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A	
		Bottom	0.81	0.000	0.000	0.000	0	0.810	0.810	0.810	0.810	0.810	N/A
Limbs		Front	/	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	/	N/A
		Top	/	/	/	/	/	/	/	/	/	/	N/A
		Bottom	/	/	/	/	/	/	/	/	/	/	N/A
Exposure position		Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	③ 2.4G WIFI2 SAR	④ 2.4G MIMO SAR	⑤ BT SAR	∑1-g SAR ①+②	∑1-g SAR ①+③	∑1-g SAR ①+④	∑1-g SAR ①+⑤	Case NO.	
Head		Left Cheek	0.289	0.504	0.009	0.513	0.079	0.793	0.298	0.802	0.368	N/A	
		Left Tilt	0.280	0.804	0.004	0.808	0.039	1.084	0.284	1.088	0.319	N/A	
		Right Cheek	0.378	0.293	0.059	0.352	0.041	0.671	0.437	0.730	0.419	N/A	
		Right Tilt	0.535	0.389	0.028	0.417	0.055	0.924	0.563	0.952	0.590	N/A	
Body-worn		Front	0.134	0.125	0.007	0.132	0.011	0.259	0.141	0.266	0.145	N/A	
	Back	0.163	0.182	0.076	0.258	0.014	0.345	0.239	0.421	0.177	N/A		
Hotspot	Front	0.159	0.219	0.009	0.228	0.016	0.378	0.168	0.387	0.175	N/A		
	Back	0.172	0.293	0.225	0.518	0.019	0.465	0.397	0.690	0.191	N/A		

WWAN Band	Exposure position	Test position	①	②	③	④	⑤	Σ1-g SAR	Σ1-g SAR	Σ1-g SAR	Σ1-g SAR	Case NO.
			WWAN Ant.1 SAR	2.4G WIFI1 SAR	2.4G WIFI2 SAR	2.4G MIMO SAR	BT SAR	①+②	①+③	①+④	①+⑤	
LTE B41	Limbs	Left	0.078	0.000	0.033	0.033	0	0.078	0.111	0.111	0.078	N/A
		Right	0.024	0.178	0.000	0.178	0.008	0.202	0.024	0.202	0.032	N/A
		Top	0.279	0.641	0.003	0.644	0.043	0.920	0.282	0.923	0.322	N/A
		Bottom	0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	N/A
		Front	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	N/A
	Body-worn	Front	0.287	0.125	0.007	0.132	0.011	0.412	0.294	0.419	0.298	N/A
		Back	0.152	0.182	0.076	0.258	0.014	0.334	0.228	0.410	0.166	N/A
	Hotspot	Front	0.248	0.219	0.009	0.228	0.016	0.467	0.257	0.476	0.264	N/A
		Back	0.174	0.293	0.225	0.518	0.019	0.467	0.399	0.692	0.193	N/A
		Left	0.105	0.000	0.033	0.033	0	0.105	0.138	0.138	0.105	N/A
		Right	0.045	0.178	0.000	0.178	0.008	0.223	0.045	0.223	0.053	N/A
Top		0.000	0.641	0.003	0.644	0.043	0.641	0.003	0.644	0.043	N/A	
Bottom		0.453	0.000	0.000	0.000	0	0.453	0.453	0.453	0.453	N/A	
Limbs	Front	/	/	/	/	/	/	/	/	/	N/A	
	Back	/	/	/	/	/	/	/	/	/	N/A	
	Left	/	/	/	/	/	/	/	/	/	N/A	
	Right	/	/	/	/	/	/	/	/	/	N/A	
	Top	/	/	/	/	/	/	/	/	/	N/A	
	Bottom	/	/	/	/	/	/	/	/	/	N/A	
LTE B41	Exposure position	Test position	①	②	③	④	⑤	Σ1-g SAR	Σ1-g SAR	Σ1-g SAR	Σ1-g SAR	Case NO.
		WWAN Ant.2 SAR	2.4G WIFI1 SAR	2.4G WIFI2 SAR	2.4G MIMO SAR	BT SAR	①+②	①+③	SAR①+④	①+⑤		
	Head	Left Cheek	0.348	0.504	0.009	0.513	0.079	0.852	0.357	0.861	0.427	N/A
		Left Tilt	0.339	0.804	0.004	0.808	0.039	1.143	0.343	1.147	0.378	N/A
		Right Cheek	0.559	0.293	0.059	0.352	0.041	0.852	0.618	0.911	0.600	N/A
		Right Tilt	0.523	0.389	0.028	0.417	0.055	0.912	0.551	0.940	0.578	N/A
	Body-worn	Front	0.134	0.125	0.007	0.132	0.011	0.259	0.141	0.266	0.145	N/A
		Back	0.237	0.182	0.076	0.258	0.014	0.419	0.313	0.495	0.251	N/A
	Hotspot	Front	0.142	0.219	0.009	0.228	0.016	0.361	0.151	0.370	0.158	N/A
		Back	0.191	0.293	0.225	0.518	0.019	0.484	0.416	0.709	0.210	N/A
		Left	0.096	0.000	0.033	0.033	0	0.096	0.129	0.129	0.096	N/A
		Right	0.027	0.178	0.000	0.178	0.008	0.205	0.027	0.205	0.035	N/A
		Top	0.341	0.641	0.003	0.644	0.043	0.982	0.344	0.985	0.384	N/A
		Bottom	0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	N/A

	Limbs	Front	/	/	/	/	/	/	/	/	/	/	N/A
		Back	/	/	/	/	/	/	/	/	/	/	N/A
		Left	/	/	/	/	/	/	/	/	/	/	N/A
		Right	/	/	/	/	/	/	/	/	/	/	N/A
		Top	/	/	/	/	/	/	/	/	/	/	N/A
		Bottom	/	/	/	/	/	/	/	/	/	/	N/A

WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 5G WIF1 SAR	③ 5G WIF2 SAR	④ 5G MIMO SAR	⑤ BT SAR	Σ1-g SAR ①+②	Σ1-g SAR ①+③	Σ1-g SAR ①+④	Σ1-g SAR ①+②+⑤	Σ1-g SAR ①+③+⑤	Σ1-g SAR ①+④+⑤	Case NO.
GSM 850	Head	Left Cheek	0.156	0.402	0.245	0.647	0.079	0.558	0.401	0.803	0.637	0.48	0.882	N/A
		Left Tilt	0.099	0.564	0.316	0.880	0.039	0.663	0.415	0.979	0.702	0.454	1.018	N/A
		Right Cheek	0.284	0.239	0.483	0.722	0.041	0.523	0.767	1.006	0.564	0.808	1.047	N/A
		Right Tilt	0.096	0.284	0.453	0.737	0.055	0.38	0.549	0.833	0.435	0.604	0.888	N/A
	Body-worn	Front(voice)	0.362	0.133	0.081	0.214	0.011	0.495	0.443	0.576	0.506	0.454	0.587	N/A
		Back(voice)	0.398	0.244	0.065	0.309	0.014	0.642	0.463	0.707	0.656	0.477	0.721	N/A
		Front(data)	0.505	0.133	0.081	0.214	0.011	0.638	0.586	0.719	0.649	0.597	0.730	N/A
		Back(data)	0.609	0.244	0.065	0.309	0.014	0.853	0.674	0.918	0.867	0.688	0.932	N/A
	Hotspot	Front	0.778	0.231	0.107	0.338	0.016	1.009	0.885	1.116	1.025	0.901	1.132	N/A
		Back	0.906	0.347	0.088	0.435	0.019	1.253	0.994	1.341	1.272	1.013	1.360	N/A
		Left	0.165	0	0.031	0.031	0	0.165	0.196	0.196	0.165	0.196	0.196	N/A
		Right	0.596	0.129	0	0.129	0.008	0.725	0.596	0.725	0.733	0.604	0.733	N/A
		Top	0	0.705	0.051	0.756	0.043	0.705	0.051	0.756	0.748	0.094	0.799	N/A
		Bottom	0.577	0	0	0.000	0	0.577	0.577	0.577	0.577	0.577	0.577	N/A
	Limbs	Front	/	1.396	0.393	1.789	/	/	/	/	/	/	/	N/A
		Back	/	0.892	0.248	1.140	/	/	/	/	/	/	/	N/A
		Left	/	0.000	0.091	0.091	/	/	/	/	/	/	/	N/A
		Right	/	0.185	0.000	0.185	/	/	/	/	/	/	/	N/A
		Top	/	1.426	0.213	1.639	/	/	/	/	/	/	/	N/A
		Bottom	/	0.000	0.000	0.000	/	/	/	/	/	/	/	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 5G WIF1 SAR	③ 5G WIF2 SAR	④ 5G MIMO SAR	⑤ BT SAR	Σ1-g SAR ①+②	Σ1-g SAR ①+③	Σ1-g SAR ①+④	Σ1-g SAR ①+②+⑤	Σ1-g SAR ①+③+⑤	Σ1-g SAR ①+④+⑤	Case NO.
	Head	Left Cheek	0.792	0.402	0.245	0.647	0.079	1.194	1.037	1.439	1.273	1.116	1.518	N/A
		Left Tilt	0.309	0.564	0.316	0.880	0.039	0.873	0.625	1.189	0.912	0.664	1.228	N/A
		Right Cheek	0.698	0.239	0.483	0.722	0.041	0.937	1.181	1.420	0.978	1.222	1.461	N/A
		Right Tilt	0.728	0.284	0.453	0.737	0.055	1.012	1.181	1.465	1.067	1.236	1.520	N/A
	Body-worn	Front(voice)	0.105	0.133	0.081	0.214	0.011	0.238	0.186	0.319	0.249	0.197	0.330	N/A
		Back(voice)	0.094	0.244	0.065	0.309	0.014	0.338	0.159	0.403	0.352	0.173	0.417	N/A
		Front(data)	0.323	0.133	0.081	0.214	0.011	0.456	0.404	0.537	0.467	0.415	0.548	N/A
		Back(data)	0.269	0.244	0.065	0.309	0.014	0.513	0.334	0.578	0.527	0.348	0.592	N/A
	Hotspot	Front	0.299	0.231	0.107	0.338	0.016	0.530	0.406	0.637	0.546	0.422	0.653	N/A
Back		0.253	0.347	0.088	0.435	0.019	0.600	0.341	0.688	0.619	0.36	0.707	N/A	
Left		0.104	0	0.031	0.031	0	0.104	0.135	0.135	0.104	0.135	0.135	N/A	
Right		0.241	0.129	0.000	0.129	0.008	0.370	0.241	0.370	0.378	0.249	0.378	N/A	

WWAN Band	Exposure position	Test position	①	②	③	④	⑤	Σ1-g	Σ1-g	Σ1-g	Σ1-g	Σ1-g	Σ1-g	Case NO.	
			WWAN Ant.1 SAR	5G WIF1 SAR	5G WIF2 SAR	5G MIMO SAR	BT SAR	SAR ①+②	SAR ①+③	SAR ①+④	SAR ①+②+⑤	SAR ①+③+⑤	SAR ①+④+⑤		
		Top	0.184	0.705	0.051	0.756	0.043	0.889	0.235	0.940	0.932	0.278	0.983	N/A	
		Bottom	0.000	0	0.000	0.000	0	0.000	0.000	0.000	0.000	0	0.000	N/A	
	Limbs	Front	/	1.396	0.393	1.789	/	/	/	/	/	/	/	/	N/A
		Back	/	0.892	0.248	1.140	/	/	/	/	/	/	/	/	N/A
		Left	/	0.000	0.091	0.091	/	/	/	/	/	/	/	/	N/A
		Right	/	0.185	0.000	0.185	/	/	/	/	/	/	/	/	N/A
		Top	/	1.426	0.213	1.639	/	/	/	/	/	/	/	/	N/A
		Bottom	/	0.000	0.000	0.000	/	/	/	/	/	/	/	/	N/A
GSM 1900	Head	Left Cheek	0.075	0.402	0.245	0.647	0.079	0.477	0.320	0.722	0.556	0.399	0.801	N/A	
		Left Tilt	0.024	0.564	0.316	0.880	0.039	0.588	0.340	0.904	0.627	0.379	0.943	N/A	
		Right Cheek	0.064	0.239	0.483	0.722	0.041	0.303	0.547	0.786	0.344	0.588	0.827	N/A	
		Right Tilt	0.082	0.284	0.453	0.737	0.055	0.366	0.535	0.819	0.421	0.59	0.874	N/A	
	Body-worn	Front(voice)	0.313	0.133	0.081	0.214	0.011	0.446	0.394	0.527	0.457	0.405	0.538	N/A	
		Back(voice)	0.302	0.244	0.065	0.309	0.014	0.546	0.367	0.611	0.56	0.381	0.625	N/A	
		Front(data)	0.403	0.133	0.081	0.214	0.011	0.536	0.484	0.617	0.547	0.495	0.628	N/A	
		Back(data)	0.365	0.244	0.065	0.309	0.014	0.609	0.430	0.674	0.623	0.444	0.688	N/A	
	Hotspot	Front	0.293	0.231	0.107	0.338	0.016	0.524	0.400	0.631	0.54	0.416	0.647	N/A	
		Back	0.319	0.347	0.088	0.435	0.019	0.666	0.407	0.754	0.685	0.426	0.773	N/A	
		Left	0.091	0	0.031	0.031	0	0.091	0.122	0.122	0.091	0.122	0.122	N/A	
		Right	0.03	0.129	0.000	0.129	0.008	0.159	0.030	0.159	0.167	0.038	0.167	N/A	
		Top	0	0.705	0.051	0.756	0.043	0.705	0.051	0.756	0.748	0.094	0.799	N/A	
		Bottom	0.837	0	0.000	0.000	0	0.837	0.837	0.837	0.837	0.837	0.837	0.837	N/A
	Limbs	Front	/	1.396	0.393	1.789	/	/	/	/	/	/	/	/	N/A
		Back	/	0.892	0.248	1.140	/	/	/	/	/	/	/	/	N/A
		Left	/	0.000	0.091	0.091	/	/	/	/	/	/	/	/	N/A
		Right	/	0.185	0.000	0.185	/	/	/	/	/	/	/	/	N/A
		Top	/	1.426	0.213	1.639	/	/	/	/	/	/	/	/	N/A
		Bottom	3.17	0.000	0.000	0.000	/	3.17	3.17	3.17	3.17	3.17	3.17	3.17	N/A
	GSM 1900	Head	Left Cheek	0.369	0.402	0.245	0.647	0.079	0.771	0.614	1.016	0.850	0.693	1.095	N/A
			Left Tilt	0.411	0.564	0.316	0.880	0.039	0.975	0.727	1.291	1.014	0.766	1.330	N/A
		Body-worn	Right Cheek	0.449	0.239	0.483	0.722	0.041	0.688	0.932	1.171	0.729	0.973	1.212	N/A
			Right Tilt	0.507	0.284	0.453	0.737	0.055	0.791	0.960	1.244	0.846	1.015	1.299	N/A
			Front(voice)	0.072	0.133	0.081	0.214	0.011	0.205	0.153	0.286	0.216	0.164	0.297	N/A
			Back(voice)	0.098	0.244	0.065	0.309	0.014	0.342	0.163	0.407	0.356	0.177	0.421	N/A
		Hotspot	Front(data)	0.235	0.133	0.081	0.214	0.011	0.368	0.316	0.449	0.379	0.327	0.460	N/A
			Back(data)	0.318	0.244	0.065	0.309	0.014	0.562	0.383	0.627	0.576	0.397	0.641	N/A
Front			0.188	0.231	0.107	0.338	0.016	0.419	0.295	0.526	0.435	0.311	0.542	N/A	
Back			0.251	0.347	0.088	0.435	0.019	0.598	0.339	0.686	0.617	0.358	0.705	N/A	
		Left	0.179	0	0.031	0.031	0	0.179	0.210	0.210	0.179	0.21	0.210	N/A	

WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 5G WIF1 SAR	③ 5G WIF2 SAR	④ 5G MIMO SAR	⑤ BT SAR	Σ1-g SAR ①+②	Σ1-g SAR ①+③	Σ1-g SAR ①+④	Σ1-g SAR ①+②+⑤	Σ1-g SAR ①+③+⑤	Σ1-g SAR ①+④+⑤	Case NO.	
LTE B41	Head	Left Cheek	0.023	0.402	0.245	0.647	0.079	0.425	0.268	0.670	0.504	0.347	0.749	N/A	
		Left Tilt	0.013	0.564	0.316	0.880	0.039	0.577	0.329	0.893	0.616	0.368	0.932	N/A	
		Right Cheek	0.086	0.239	0.483	0.722	0.041	0.325	0.569	0.808	0.366	0.610	0.849	N/A	
		Right Tilt	0.025	0.284	0.453	0.737	0.055	0.309	0.478	0.762	0.364	0.533	0.817	N/A	
	Body-worn	Front	0.287	0.133	0.081	0.214	0.011	0.420	0.368	0.501	0.431	0.379	0.512	N/A	
		Back	0.152	0.244	0.065	0.309	0.014	0.396	0.217	0.461	0.410	0.231	0.475	N/A	
	Hotspot	Front	0.248	0.231	0.107	0.338	0.016	0.479	0.355	0.586	0.495	0.371	0.602	N/A	
		Back	0.174	0.347	0.088	0.435	0.019	0.521	0.262	0.609	0.540	0.281	0.628	N/A	
		Left	0.105	0.000	0.031	0.031	0	0.105	0.136	0.136	0.105	0.136	0.136	N/A	
		Right	0.045	0.129	0.000	0.129	0.008	0.174	0.045	0.174	0.182	0.053	0.182	N/A	
		Top	0	0.705	0.051	0.756	0.043	0.705	0.051	0.756	0.748	0.094	0.799	N/A	
		Bottom	0.453	0.000	0.000	0.000	0	0.453	0.453	0.453	0.453	0.453	0.453	N/A	
	Limbs	Front	/	1.396	0.393	1.789	/	/	/	/	/	N/A	0	N/A	
		Back	/	0.892	0.248	1.14	/	/	/	/	/	N/A	0	N/A	
		Left	/	0	0.091	0.091	/	/	/	/	/	N/A	0	N/A	
		Right	/	0.185	0	0.185	/	/	/	/	/	N/A	0	N/A	
		Top	/	1.426	0.213	1.639	/	/	/	/	/	N/A	0	N/A	
		Bottom	/	0	0	0	/	/	/	/	/	N/A	0	N/A	
		Exposure position	Test position	① WWAN Ant.2 SAR	② 5G WIF1 SAR	③ 5G WIF2 SAR	④ 5G MIMO SAR	⑤ BT SAR	Σ1-g SAR ①+②	Σ1-g SAR ①+③	Σ1-g SAR ①+④	Σ1-g SAR ①+②+⑤	Σ1-g SAR ①+③+⑤	Σ1-g SAR ①+④+⑤	Case NO.
	Head	Left Cheek	0.348	0.402	0.245	0.647	0.079	0.750	0.593	0.995	0.829	0.672	1.074	N/A	
		Left Tilt	0.339	0.564	0.316	0.880	0.039	0.903	0.655	1.219	0.942	0.694	1.258	N/A	
		Right Cheek	0.559	0.239	0.483	0.722	0.041	0.798	1.042	1.281	0.839	1.083	1.322	N/A	
		Right Tilt	0.523	0.284	0.453	0.737	0.055	0.807	0.976	1.260	0.862	1.031	1.315	N/A	
	Body-worn	Front	0.134	0.133	0.081	0.214	0.011	0.267	0.215	0.348	0.278	0.226	0.359	N/A	
		Back	0.237	0.244	0.065	0.309	0.014	0.481	0.302	0.546	0.495	0.316	0.560	N/A	
	Hotspot	Front	0.142	0.231	0.107	0.338	0.016	0.373	0.249	0.480	0.389	0.265	0.496	N/A	
		Back	0.191	0.347	0.088	0.435	0.019	0.538	0.279	0.626	0.557	0.298	0.645	N/A	
		Left	0.096	0.000	0.031	0.031	0	0.096	0.127	0.127	0.096	0.127	0.127	N/A	
		Right	0.027	0.129	0.000	0.129	0.008	0.156	0.027	0.156	0.164	0.035	0.164	N/A	
		Top	0.341	0.705	0.051	0.756	0.043	1.046	0.392	1.097	1.089	0.435	1.140	N/A	
Bottom		0.000	0.000	0.000	0.000	0	0.000	0.000	0.000	0.000	0.000	0.000	N/A		
Limbs	Front	/	1.396	0.393	1.789	/	/	/	/	/	N/A	0	N/A		
	Back	/	0.892	0.248	1.14	/	/	/	/	/	N/A	0	N/A		
	Left	/	0	0.091	0.091	/	/	/	/	/	N/A	0	N/A		
	Right	/	0.185	0	0.185	/	/	/	/	/	N/A	0	N/A		
	Top	/	1.426	0.213	1.639	/	/	/	/	/	N/A	0	N/A		
	Bottom	/	0	0	0	/	/	/	/	/	N/A	0	N/A		

WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	③ 5G WIFI2 SAR	∑1-g SAR ①+②+③	Case NO.	
GSM 850	Head	Left Cheek	0.156	0.504	0.245	0.905	N/A	
		Left Tilt	0.099	0.804	0.316	1.219	N/A	
		Right Cheek	0.284	0.293	0.483	1.060	N/A	
		Right Tilt	0.096	0.389	0.453	0.938	N/A	
	Body-worn	Front(voice)	0.362	0.125	0.081	0.568	N/A	
		Back(voice)	0.398	0.182	0.065	0.645	N/A	
		Front(data)	0.505	0.125	0.081	0.711	N/A	
		Back(data)	0.609	0.182	0.065	0.856	N/A	
	Hotspot	Front	0.778	0.219	0.107	1.104	N/A	
		Back	0.906	0.293	0.088	1.287	N/A	
		Left	0.165	0.000	0.031	0.196	N/A	
		Right	0.596	0.178	0	0.774	N/A	
		Top	0	0.641	0.051	0.692	N/A	
		Bottom	0.577	0.000	0	0.577	N/A	
	Limbs	Front	/	/	0.393	0.393	N/A	
		Back	/	/	0.248	0.248	N/A	
		Left	/	/	0.091	0.091	N/A	
		Right	/	/	0	0	N/A	
		Top	/	/	0.213	0.213	N/A	
		Bottom	/	/	0	0	N/A	
		Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.792	0.504	0.245	1.541	N/A	
		Left Tilt	0.309	0.804	0.316	1.429	N/A	
		Right Cheek	0.698	0.293	0.483	1.474	N/A	
		Right Tilt	0.728	0.389	0.453	1.570	N/A	
	Body-worn	Front(voice)	0.105	0.125	0.081	0.311	N/A	
		Back(voice)	0.094	0.182	0.065	0.341	N/A	
		Front(data)	0.323	0.125	0.081	0.529	N/A	
		Back(data)	0.269	0.182	0.065	0.516	N/A	
	Hotspot	Front	0.299	0.219	0.107	0.625	N/A	
Back		0.253	0.293	0.088	0.634	N/A		
Left		0.104	0.000	0.031	0.135	N/A		
Right		0.241	0.178	0	0.419	N/A		
Top		0.184	0.641	0.051	0.876	N/A		
Bottom		0.000	0.000	0	0.000	N/A		
Limbs	Front	/	/	0.393	0.393	N/A		
	Back	/	/	0.248	0.248	N/A		
	Left	/	/	0.091	0.091	N/A		
	Right	/	/	0	0	N/A		
	Top	/	/	0.213	0.213	N/A		
	Bottom	/	/	0	0	N/A		

WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	Σ1-g SAR ①+②+⑤	Case NO.	
GSM 1900	Head	Left Cheek	0.075	0.504	0.245	0.824	N/A	
		Left Tilt	0.024	0.804	0.316	1.144	N/A	
		Right Cheek	0.064	0.293	0.483	0.840	N/A	
		Right Tilt	0.082	0.389	0.453	0.924	N/A	
	Body-worn	Front(voice)	0.313	0.125	0.081	0.519	N/A	
		Back(voice)	0.302	0.182	0.065	0.549	N/A	
		Front(data)	0.403	0.125	0.081	0.609	N/A	
		Back(data)	0.365	0.182	0.065	0.612	N/A	
	Hotspot	Front	0.293	0.219	0.107	0.619	N/A	
		Back	0.319	0.293	0.088	0.700	N/A	
		Left	0.091	0.000	0.031	0.122	N/A	
		Right	0.03	0.178	0	0.208	N/A	
		Top	0	0.641	0.051	0.692	N/A	
		Bottom	0.837	0.000	0	0.837	N/A	
	Limbs	Front	/	/	0.393	0.393	N/A	
		Back	/	/	0.248	0.248	N/A	
		Left	/	/	0.091	0.091	N/A	
		Right	/	/	0	0	N/A	
		Top	/	/	0.213	0.213	N/A	
		Bottom	3.17	/	0	3.17	N/A	
		Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	Σ1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.369	0.504	0.245	1.118	N/A	
		Left Tilt	0.411	0.804	0.316	1.531	N/A	
		Right Cheek	0.449	0.293	0.483	1.225	N/A	
		Right Tilt	0.507	0.389	0.453	1.349	N/A	
	Body-worn	Front(voice)	0.072	0.125	0.081	0.278	N/A	
		Back(voice)	0.098	0.182	0.065	0.345	N/A	
		Front(data)	0.235	0.125	0.081	0.441	N/A	
		Back(data)	0.318	0.182	0.065	0.565	N/A	
	Hotspot	Front	0.188	0.219	0.107	0.514	N/A	
Back		0.251	0.293	0.088	0.632	N/A		
Left		0.179	0.000	0.031	0.210	N/A		
Right		0.032	0.178	0	0.210	N/A		
Top		0.427	0.641	0.051	1.119	N/A		
Bottom		0.000	0.000	0	0.000	N/A		
Limbs	Front	/	/	0.393	0.393	N/A		
	Back	/	/	0.248	0.248	N/A		
	Left	/	/	0.091	0.091	N/A		
	Right	/	/	0	0	N/A		
	Top	/	/	0.213	0.213	N/A		
	Bottom	/	/	0	0	N/A		

WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.	
WCDMA B2	Head	Left Cheek	0.147	0.504	0.245	0.896	N/A	
		Left Tilt	0.049	0.804	0.316	1.169	N/A	
		Right Cheek	0.118	0.293	0.483	0.894	N/A	
		Right Tilt	0.094	0.389	0.453	0.936	N/A	
	Body-worn	Front	0.507	0.125	0.081	0.713	N/A	
		Back	0.486	0.182	0.065	0.733	N/A	
	Hotspot	Front	0.309	0.219	0.107	0.635	N/A	
		Back	0.316	0.293	0.088	0.697	N/A	
		Left	0.117	0.000	0.031	0.148	N/A	
		Right	0.025	0.178	0	0.203	N/A	
		Top	0	0.641	0.051	0.692	N/A	
		Bottom	0.713	0.000	0	0.713	N/A	
	Limbs	Front	/	/	0.393	0.393	N/A	
		Back	/	/	0.248	0.248	N/A	
		Left	/	/	0.091	0.091	N/A	
		Right	/	/	0.000	0	N/A	
		Top	/	/	0.213	0.213	N/A	
		Bottom	3.465	/	0.000	3.465	N/A	
		Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.449	0.504	0.245	1.198	N/A	
		Left Tilt	0.377	0.804	0.316	1.497	N/A	
		Right Cheek	0.488	0.293	0.483	1.264	N/A	
		Right Tilt	0.542	0.389	0.453	1.384	N/A	
	Body-worn	Front	0.189	0.125	0.081	0.395	N/A	
Back		0.405	0.182	0.065	0.652	N/A		
Hotspot	Front	0.144	0.219	0.107	0.470	N/A		
	Back	0.205	0.293	0.088	0.586	N/A		
	Left	0.123	0.000	0.031	0.154	N/A		
	Right	0.033	0.178	0	0.211	N/A		
	Top	0.517	0.641	0.051	1.209	N/A		
	Bottom	0.000	0.000	0	0.000	N/A		
Limbs	Front	/	/	0.393	0.393	N/A		
	Back	/	/	0.248	0.248	N/A		
	Left	/	/	0.091	0.091	N/A		
	Right	/	/	0	0	N/A		
	Top	/	/	0.213	0.213	N/A		
	Bottom	/	/	0	0	N/A		
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.	
WCDMA B4	Head	Left Cheek	0.096	0.504	0.245	0.845	N/A	
		Left Tilt	0.034	0.804	0.316	1.154	N/A	

		Right Cheek	0.132	0.293	0.483	0.908	N/A
		Right Tilt	0.041	0.389	0.453	0.883	N/A
	Body-worn	Front	0.461	0.125	0.081	0.667	N/A
		Back	0.496	0.182	0.065	0.743	N/A
	Hotspot	Front	0.358	0.219	0.107	0.684	N/A
		Back	0.314	0.293	0.088	0.695	N/A
		Left	0.045	0.000	0.031	0.076	N/A
		Right	0.024	0.178	0	0.202	N/A
		Top	0	0.641	0.051	0.692	N/A
		Bottom	0.599	0.000	0	0.599	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
		Bottom	2.675	/	0	2.675	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.496	0.504	0.245	1.245	N/A
		Left Tilt	0.325	0.804	0.316	1.445	N/A
		Right Cheek	0.656	0.293	0.483	1.432	N/A
		Right Tilt	0.691	0.389	0.453	1.533	N/A
	Body-worn	Front	0.249	0.125	0.081	0.455	N/A
		Back	0.343	0.182	0.065	0.590	N/A
	Hotspot	Front	0.212	0.219	0.107	0.538	N/A
		Back	0.282	0.293	0.088	0.663	N/A
		Left	0.212	0.000	0.031	0.243	N/A
Right		0.025	0.178	0	0.203	N/A	
Top		0.383	0.641	0.051	1.075	N/A	
Bottom		0.000	0.000	0	0.000	N/A	
Limbs	Front	/	/	0.393	0.393	N/A	
	Back	/	/	0.248	0.248	N/A	
	Left	/	/	0.091	0.091	N/A	
	Right	/	/	0	0	N/A	
	Top	/	/	0.213	0.213	N/A	
	Bottom	/	/	0	0	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
WCDMA B5	Head	Left Cheek	0.266	0.504	0.245	1.015	N/A
		Left Tilt	0.138	0.804	0.316	1.258	N/A
		Right Cheek	0.314	0.293	0.483	1.090	N/A
		Right Tilt	0.141	0.389	0.453	0.983	N/A
	Body-worn	Front	0.414	0.125	0.081	0.620	N/A
		Back	0.497	0.182	0.065	0.744	N/A
	Hotspot	Front	0.729	0.219	0.107	1.055	N/A

		Back	0.676	0.293	0.088	1.057	N/A
		Left	0.123	0.000	0.031	0.154	N/A
		Right	0.448	0.178	0	0.626	N/A
		Top	0	0.641	0.051	0.692	N/A
		Bottom	0.729	0.000	0	0.729	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
		Head	Left Cheek	0.571	0.504	0.245	1.320
	Left Tilt		0.456	0.804	0.316	1.576	N/A
	Right Cheek		0.493	0.293	0.483	1.269	N/A
	Right Tilt		0.432	0.389	0.453	1.274	N/A
	Body-worn	Front	0.232	0.125	0.081	0.438	N/A
		Back	0.262	0.182	0.065	0.509	N/A
	Hotspot	Front	0.237	0.219	0.107	0.563	N/A
		Back	0.212	0.293	0.088	0.593	N/A
		Left	0.073	0.000	0.031	0.104	N/A
		Right	0.015	0.178	0	0.193	N/A
		Top	0.162	0.641	0.051	0.854	N/A
	Limbs	Bottom	0.000	0.000	0	0.000	N/A
		Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
Left		/	/	0.091	0.091	N/A	
Right		/	/	0	0	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
		Head	Left Cheek	0.147	0.504	0.245	0.896
Left Tilt	0.068		0.804	0.316	1.188	N/A	
Right Cheek	0.109		0.293	0.483	0.885	N/A	
Right Tilt	0.074		0.389	0.453	0.916	N/A	
Body-worn	Front	0.475	0.125	0.081	0.681	N/A	
	Back	0.445	0.182	0.065	0.692	N/A	
LTE B2	Hotspot	Front	0.303	0.219	0.107	0.629	N/A
		Back	0.29	0.293	0.088	0.671	N/A
		Left	0.087	0.000	0.031	0.118	N/A
		Right	0.026	0.178	0	0.204	N/A
		Top	0	0.641	0.051	0.692	N/A
Bottom	0.637	0.000	0	0.637	N/A		

	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
		Bottom	2.961	/	0	2.582	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.438	0.504	0.245	1.187	N/A
		Left Tilt	0.285	0.804	0.316	1.405	N/A
		Right Cheek	0.479	0.293	0.483	1.255	N/A
		Right Tilt	0.549	0.389	0.453	1.391	N/A
	Body-worn	Front	0.191	0.125	0.081	0.397	N/A
		Back	0.254	0.182	0.065	0.501	N/A
	Hotspot	Front	0.173	0.219	0.107	0.499	N/A
		Back	0.226	0.293	0.088	0.607	N/A
		Left	0.160	0.000	0.031	0.191	N/A
		Right	0.049	0.178	0	0.227	N/A
		Top	0.374	0.641	0.051	1.066	N/A
		Bottom	0.000	0.000	0	0.000	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
Bottom		/	/	0	0	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
LTE B4	Head	Left Cheek	0.18	0.504	0.245	0.929	N/A
		Left Tilt	0.064	0.804	0.316	1.184	N/A
		Right Cheek	0.131	0.293	0.483	0.907	N/A
		Right Tilt	0.092	0.389	0.453	0.934	N/A
	Body-worn	Front	0.595	0.125	0.081	0.801	N/A
		Back	0.392	0.182	0.065	0.639	N/A
	Hotspot	Front	0.363	0.219	0.107	0.689	N/A
		Back	0.235	0.293	0.088	0.616	N/A
		Left	0.085	0.000	0.031	0.116	N/A
		Right	0.025	0.178	0	0.203	N/A
		Top	0	0.641	0.051	0.692	N/A
		Bottom	0.549	0.000	0	0.549	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
Right		/	/	0	0	N/A	
Top		/	/	0.213	0.213	N/A	

		Bottom	2.824	/	0	3.07	N/A	
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.	
	Head	Left Cheek	0.481	0.504	0.245	1.230	N/A	
		Left Tilt	0.323	0.804	0.316	1.443	N/A	
		Right Cheek	0.685	0.293	0.483	1.461	N/A	
		Right Tilt	0.668	0.389	0.453	1.510	N/A	
	Body-worn	Front	0.247	0.125	0.081	0.453	N/A	
		Back	0.290	0.182	0.065	0.537	N/A	
	Hotspot	Front	0.177	0.219	0.107	0.503	N/A	
		Back	0.249	0.293	0.088	0.630	N/A	
		Left	0.229	0.000	0.031	0.260	N/A	
		Right	0.025	0.178	0	0.203	N/A	
		Top	0.332	0.641	0.051	1.024	N/A	
		Bottom	0.000	0.000	0	0.000	N/A	
	Limbs	Front	/	/	0.393	0.393	N/A	
		Back	/	/	0.248	0.248	N/A	
		Left	/	/	0.091	0.091	N/A	
		Right	/	/	0	0	N/A	
		Top	/	/	0.213	0.213	N/A	
		Bottom	/	/	0	0	N/A	
	WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	LTE B5	Head	Left Cheek	0.221	0.504	0.245	0.970	N/A
Left Tilt			0.097	0.804	0.316	1.217	N/A	
Right Cheek			0.22	0.293	0.483	0.996	N/A	
Right Tilt			0.116	0.389	0.453	0.958	N/A	
Body-worn		Front	0.348	0.125	0.081	0.554	N/A	
		Back	0.448	0.182	0.065	0.695	N/A	
Hotspot		Front	0.517	0.219	0.107	0.843	N/A	
		Back	0.629	0.293	0.088	1.010	N/A	
		Left	0.104	0.000	0.031	0.135	N/A	
		Right	0.376	0.178	0	0.554	N/A	
		Top	0	0.641	0.051	0.692	N/A	
		Bottom	0.358	0.000	0	0.358	N/A	
Limbs		Front	/	/	0.393	0.393	N/A	
		Back	/	/	0.248	0.248	N/A	
		Left	/	/	0.091	0.091	N/A	
		Right	/	/	0	0	N/A	
		Top	/	/	0.213	0.213	N/A	
		Bottom	/	/	0	0	N/A	
		Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
		Head	Left Cheek	0.798	0.504	0.245	1.547	N/A

		Left Tilt	0.308	0.804	0.316	1.428	N/A	
		Right Cheek	0.648	0.293	0.483	1.424	N/A	
		Right Tilt	0.624	0.389	0.453	1.466	N/A	
	Body-worn	Front	0.199	0.125	0.081	0.405	N/A	
		Back	0.176	0.182	0.065	0.423	N/A	
	Hotspot	Front	0.185	0.219	0.107	0.511	N/A	
		Back	0.217	0.293	0.088	0.598	N/A	
		Left	0.066	0.000	0.031	0.097	N/A	
		Right	0.013	0.178	0	0.191	N/A	
		Top	0.149	0.641	0.051	0.841	N/A	
		Bottom	0.000	0.000	0	0.000	N/A	
	Limbs	Front	/	/	0.393	0.393	N/A	
		Back	/	/	0.248	0.248	N/A	
		Left	/	/	0.091	0.091	N/A	
		Right	/	/	0	0	N/A	
Top		/	/	0.213	0.213	N/A		
Bottom		/	/	0	0	N/A		
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.	
LTE B7	Head	Left Cheek	0.084	0.504	0.245	0.833	N/A	
		Left Tilt	0.057	0.804	0.316	1.177	N/A	
		Right Cheek	0.14	0.293	0.483	0.916	N/A	
		Right Tilt	0.094	0.389	0.453	0.936	N/A	
	Body-worn	Front	0.431	0.125	0.081	0.637	N/A	
		Back	0.403	0.182	0.065	0.650	N/A	
	Hotspot	Front	0.332	0.219	0.107	0.658	N/A	
		Back	0.315	0.293	0.088	0.696	N/A	
		Left	0.131	0.000	0.031	0.162	N/A	
		Right	0.1	0.178	0	0.278	N/A	
		Top	0	0.641	0.051	0.692	N/A	
		Bottom	0.716	0.000	0	0.716	N/A	
	Limbs	Front	/	/	0.393	0.393	N/A	
		Back	/	/	0.248	0.248	N/A	
		Left	/	/	0.091	0.091	N/A	
		Right	/	/	0	0	N/A	
		Top	/	/	0.213	0.213	N/A	
		Bottom	1.898	/	0	1.7	N/A	
		Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.500	0.504	0.245	1.249	N/A	
		Left Tilt	0.208	0.804	0.316	1.328	N/A	
Right Cheek		0.534	0.293	0.483	1.310	N/A		
Right Tilt		0.471	0.389	0.453	1.313	N/A		
Body-worn	Front	0.137	0.125	0.081	0.343	N/A		
	Back	0.176	0.182	0.065	0.423	N/A		

	Hotspot	Front	0.337	0.219	0.107	0.663	N/A
		Back	0.400	0.293	0.088	0.781	N/A
		Left	0.108	0.000	0.031	0.139	N/A
		Right	0.024	0.178	0	0.202	N/A
		Top	0.442	0.641	0.051	1.134	N/A
		Bottom	0.000	0.000	0	0.000	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
Top		/	/	0.213	0.213	N/A	
Bottom	/	/	0	0	N/A		
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
LTE B12	Head	Left Cheek	0.124	0.504	0.245	0.873	N/A
		Left Tilt	0.082	0.804	0.316	1.202	N/A
		Right Cheek	0.159	0.293	0.483	0.935	N/A
		Right Tilt	0.074	0.389	0.453	0.916	N/A
	Body-worn	Front	0.262	0.125	0.081	0.468	N/A
		Back	0.309	0.182	0.065	0.556	N/A
	Hotspot	Front	0.335	0.219	0.107	0.661	N/A
		Back	0.425	0.293	0.088	0.806	N/A
		Left	0.107	0.000	0.031	0.138	N/A
		Right	0.29	0.178	0	0.468	N/A
		Top	0	0.641	0.051	0.692	N/A
		Bottom	0.222	0.000	0	0.222	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
		Bottom	/	/	0	0	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.489	0.504	0.245	1.238	N/A
		Left Tilt	0.415	0.804	0.316	1.535	N/A
		Right Cheek	0.437	0.293	0.483	1.213	N/A
		Right Tilt	0.439	0.389	0.453	1.281	N/A
	Body-worn	Front	0.250	0.125	0.081	0.456	N/A
Back		0.219	0.182	0.065	0.466	N/A	
Hotspot	Front	0.260	0.219	0.107	0.586	N/A	
	Back	0.180	0.293	0.088	0.561	N/A	
	Left	0.091	0.000	0.031	0.122	N/A	
	Right	0.050	0.178	0	0.228	N/A	
	Top	0.131	0.641	0.051	0.823	N/A	

WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	Σ1-g SAR ①+②+⑤	Case NO.
				Bottom	0.000	0.000	
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
		Bottom	/	/	0	0	N/A
LTE B17	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	Σ1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.133	0.504	0.245	0.882	N/A
		Left Tilt	0.079	0.804	0.316	1.199	N/A
		Right Cheek	0.161	0.293	0.483	0.937	N/A
		Right Tilt	0.074	0.389	0.453	0.916	N/A
	Body-worn	Front	0.26	0.125	0.081	0.466	N/A
		Back	0.289	0.182	0.065	0.536	N/A
	Hotspot	Front	0.343	0.219	0.107	0.669	N/A
		Back	0.427	0.293	0.088	0.808	N/A
		Left	0.11	0.000	0.031	0.141	N/A
		Right	0.276	0.178	0	0.454	N/A
		Top	0	0.641	0.051	0.692	N/A
		Bottom	0.225	0.000	0	0.225	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
		Bottom	/	/	0	0	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	Σ1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.500	0.504	0.245	1.249	N/A
		Left Tilt	0.418	0.804	0.316	1.538	N/A
		Right Cheek	0.715	0.293	0.483	1.491	N/A
		Right Tilt	0.401	0.389	0.453	1.243	N/A
	Body-worn	Front	0.239	0.125	0.081	0.445	N/A
		Back	0.197	0.182	0.065	0.444	N/A
Hotspot	Front	0.296	0.219	0.107	0.622	N/A	
	Back	0.218	0.293	0.088	0.599	N/A	
	Left	0.080	0.000	0.031	0.111	N/A	
	Right	0.015	0.178	0	0.193	N/A	
	Top	0.161	0.641	0.051	0.853	N/A	
	Bottom	0.000	0.000	0	0.000	N/A	
Limbs	Front	/	/	0.393	0.393	N/A	
	Back	/	/	0.248	0.248	N/A	
	Left	/	/	0.091	0.091	N/A	
	Right	/	/	0	0	N/A	

WWAN Band	Exposure position	Top	/	/	0.213	0.213	N/A	
		Bottom	/	/	0	0	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.	
LTE B26	Head	Left Cheek	0.166	0.504	0.245	0.915	N/A	
		Left Tilt	0.099	0.804	0.316	1.219	N/A	
		Right Cheek	0.263	0.293	0.483	1.039	N/A	
		Right Tilt	0.105	0.389	0.453	0.947	N/A	
	Body-worn	Front	0.222	0.125	0.081	0.428	N/A	
		Back	0.45	0.182	0.065	0.697	N/A	
	Hotspot	Front	0.381	0.219	0.107	0.707	N/A	
		Back	0.655	0.293	0.088	1.036	N/A	
		Left	0.128	0.000	0.031	0.159	N/A	
		Right	0.383	0.178	0	0.561	N/A	
		Top	0	0.641	0.051	0.692	N/A	
		Bottom	0.373	0.000	0	0.373	N/A	
	Limbs	Front	/	/	0.393	0.393	N/A	
		Back	/	/	0.248	0.248	N/A	
		Left	/	/	0.091	0.091	N/A	
		Right	/	/	0	0	N/A	
		Top	/	/	0.213	0.213	N/A	
		Bottom	/	/	0	0	N/A	
		Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.660	0.504	0.245	1.409	N/A	
		Left Tilt	0.419	0.804	0.316	1.539	N/A	
		Right Cheek	0.444	0.293	0.483	1.220	N/A	
		Right Tilt	0.345	0.389	0.453	1.187	N/A	
	Body-worn	Front	0.221	0.125	0.081	0.427	N/A	
		Back	0.165	0.182	0.065	0.412	N/A	
	Hotspot	Front	0.185	0.219	0.107	0.511	N/A	
		Back	0.262	0.293	0.088	0.643	N/A	
		Left	0.064	0.000	0.031	0.095	N/A	
		Right	0.012	0.178	0	0.190	N/A	
		Top	0.141	0.641	0.051	0.833	N/A	
Bottom		0.000	0.000	0	0.000	N/A		
Limbs	Front	/	/	0.393	0.393	N/A		
	Back	/	/	0.248	0.248	N/A		
	Left	/	/	0.091	0.091	N/A		
	Right	/	/	0	0	N/A		
	Top	/	/	0.213	0.213	N/A		
	Bottom	/	/	0	0	N/A		
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.	

LTE B38	Head	Left Cheek	0.019	0.504	0.245	0.768	N/A
		Left Tilt	0.009	0.804	0.316	1.129	N/A
		Right Cheek	0.073	0.293	0.483	0.849	N/A
		Right Tilt	0.017	0.389	0.453	0.859	N/A
	Body-worn	Front	0.255	0.125	0.081	0.461	N/A
		Back	0.144	0.182	0.065	0.391	N/A
	Hotspot	Front	0.285	0.219	0.107	0.611	N/A
		Back	0.214	0.293	0.088	0.595	N/A
		Left	0.079	0.000	0.031	0.110	N/A
		Right	0.055	0.178	0	0.233	N/A
		Top	0	0.641	0.051	0.692	N/A
		Bottom	0.81	0.000	0	0.810	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
		Bottom	/	/	0	0	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.289	0.504	0.245	1.038	N/A
		Left Tilt	0.280	0.804	0.316	1.400	N/A
		Right Cheek	0.378	0.293	0.483	1.154	N/A
		Right Tilt	0.535	0.389	0.453	1.377	N/A
	Body-worn	Front	0.134	0.125	0.081	0.340	N/A
Back		0.163	0.182	0.065	0.410	N/A	
Hotspot	Front	0.159	0.219	0.107	0.485	N/A	
	Back	0.172	0.293	0.088	0.553	N/A	
	Left	0.078	0.000	0.031	0.109	N/A	
	Right	0.024	0.178	0	0.202	N/A	
	Top	0.279	0.641	0.051	0.971	N/A	
	Bottom	0.000	0.000	0	0.000	N/A	
Limbs	Front	/	/	0.393	0.393	N/A	
	Back	/	/	0.248	0.248	N/A	
	Left	/	/	0.091	0.091	N/A	
	Right	/	/	0	0	N/A	
	Top	/	/	0.213	0.213	N/A	
	Bottom	/	/	0	0	N/A	
WWAN Band	Exposure position	Test position	① WWAN Ant.1 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
LTE B41	Head	Left Cheek	0.023	0.504	0.245	0.772	N/A
		Left Tilt	0.013	0.804	0.316	1.133	N/A
		Right Cheek	0.086	0.293	0.483	0.862	N/A
		Right Tilt	0.025	0.389	0.453	0.867	N/A
	Body-worn	Front	0.287	0.125	0.081	0.493	N/A

		Back	0.152	0.182	0.065	0.399	N/A
	Hotspot	Front	0.248	0.219	0.107	0.574	N/A
		Back	0.174	0.293	0.088	0.555	N/A
		Left	0.105	0.000	0.031	0.136	N/A
		Right	0.045	0.178	0	0.223	N/A
		Top	0	0.641	0.051	0.692	N/A
		Bottom	0.453	0.000	0	0.453	N/A
		Limbs	Front	/	/	0.393	0.393
	Back		/	/	0.248	0.248	N/A
	Left		/	/	0.091	0.091	N/A
	Right		/	/	0	0	N/A
	Top		/	/	0.213	0.213	N/A
	Bottom		/	/	0	0	N/A
	Exposure position	Test position	① WWAN Ant.2 SAR	② 2.4G WIFI1 SAR	⑤ 5G WIFI2 SAR	∑1-g SAR ①+②+⑤	Case NO.
	Head	Left Cheek	0.348	0.504	0.245	1.097	N/A
		Left Tilt	0.339	0.804	0.316	1.459	N/A
		Right Cheek	0.559	0.293	0.483	1.335	N/A
		Right Tilt	0.523	0.389	0.453	1.365	N/A
	Body-worn	Front	0.134	0.125	0.081	0.340	N/A
		Back	0.237	0.182	0.065	0.484	N/A
	Hotspot	Front	0.142	0.219	0.107	0.468	N/A
		Back	0.191	0.293	0.088	0.572	N/A
		Left	0.096	0.000	0.031	0.127	N/A
		Right	0.027	0.178	0	0.205	N/A
		Top	0.341	0.641	0.051	1.033	N/A
		Bottom	0.000	0.000	0	0.000	N/A
	Limbs	Front	/	/	0.393	0.393	N/A
		Back	/	/	0.248	0.248	N/A
		Left	/	/	0.091	0.091	N/A
		Right	/	/	0	0	N/A
		Top	/	/	0.213	0.213	N/A
		Bottom	/	/	0	0	N/A

9 Equipment list

Test Platform		SPEAG DASY5 Professional				
Description		SAR Test System (Frequency range 300MHz-6GHz)				
Software Reference		DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)				
Hardware Reference						
	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
<input checked="" type="checkbox"/>	Twin Phantom	SPEAG	SAM 1	TP-1283	NCR	NCR
<input checked="" type="checkbox"/>	Twin Phantom	SPEAG	SAM 1	1912	NCR	NCR
<input checked="" type="checkbox"/>	Twin Phantom	SPEAG	SAM 2	1913	NCR	NCR
<input checked="" type="checkbox"/>	DAE	SPEAG	DAE4	896	2017-09-27	2018-09-26
<input checked="" type="checkbox"/>	DAE	SPEAG	DAE4	1374	2017-08-31	2018-08-30
<input checked="" type="checkbox"/>	E-Field Probe	SPEAG	EX3DV4	3962	2018-01-11	2019-01-10
<input checked="" type="checkbox"/>	E-Field Probe	SPEAG	EX3DV4	7433	2017-09-30	2018-09-29
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D750V3	1160	2016-06-22	2019-06-21
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D835V2	4d105	2016-12-08	2019-12-07
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D1750V2	1149	2016-06-23	2019-06-22
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D1900V2	5d028	2016-12-07	2019-12-06
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D2450V2	733	2016-12-07	2019-12-06
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D2600V2	1125	2016-06-22	2019-06-21
<input checked="" type="checkbox"/>	Validation Kits	SPEAG	D5GHzV2	1165	2016-12-13	2019-12-12
<input checked="" type="checkbox"/>	Agilent Network Analyzer	Agilent	E5071C	MY46523590	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	Dielectric Probe Kit	Agilent	85070E	US01440210	NCR	NCR
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMU200	123090	2016-06-27	2017-06-26
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	152271	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
<input checked="" type="checkbox"/>	Signal Generator	Agilent	N5171B	MY53050736	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	Preamplifier	Mini-Circuits	ZHL-42W	15542	NCR	NCR
<input checked="" type="checkbox"/>	Power Meter	Agilent	E4416A	GB41292095	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	Power Sensor	Agilent	8481H	MY41091234	2017-03-05	2018-03-04
<input checked="" type="checkbox"/>	Power Sensor	R&S	NRP-Z92	100025	2017-03-06	2018-03-05
<input checked="" type="checkbox"/>	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
<input checked="" type="checkbox"/>	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
<input checked="" type="checkbox"/>	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR

<input checked="" type="checkbox"/>	50 Ω coaxial load	Mini-Circuits	KARN-50+	00850	NCR	NCR
<input checked="" type="checkbox"/>	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
<input checked="" type="checkbox"/>	Speed reading thermometer	MingGao	T809	NA	2017-03-08	2018-03-07
<input checked="" type="checkbox"/>	Humidity and Temperature Indicator	KIMTOKA	KIMTOKA	NA	2017-03-08	2018-03-07

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Validation Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

---END---
