



NO.: RZA2009-0599FCC



OET 65

TEST REPORT

Test name	Electromagnetic Field (Specific Absorption Rate)
Product	HSPA+ USB Slider
Model	E182E
FCC ID	QISCP12
Client	HUAWEI Technologies Co., Ltd.

TA Technology (Shanghai) Co., Ltd.



GENERAL TERMS

1. The test report is invalid if not marked with “exclusive stamp for the data report” or the stamp of the TA.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of TA.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center with in 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permissions of TA.

Address: Room4,No.399,Cailun Rd,Zhangjiang Hi-Tech Park, Pudong Shanghai,China

Post code: 201203

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: service@ta-shanghai.com

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 3of 166

GENERAL SUMMARY

Product	HSPA+ USB Slider	Model	E182E
Client	HUAWEI Technologies Co., Ltd.	Type of test	Entrusted
Manufacturer	HUAWEI Technologies Co., Ltd.	Arrival Date of sample	May 15 th , 2009
Place of sampling	(Blank)	Carrier of the samples	Ting Zhang
Quantity of the samples	One	Date of product	(Blank)
Base of the samples	(Blank)	Items of test	SAR
Series number / IMEI	359740020010060		
Standard(s)	<p>ANSI C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p>IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz)</p>		
Conclusion	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">(Stamp) Date of issue: June 10th, 2009</p>		
Comment	The test result only responds to the measured sample.		

Approved by



Weizhong Yang

Revised by



Minbao Ling

Performed by



Jinchang Li

TABLE OF CONTENT

1.	COMPETENCE AND WARRANTIES.....	6
2.	GENERAL CONDITIONS.....	6
3.	DESCRIPTION OF EUT	7
3.1.	ADDRESSING INFORMATION RELATED TO EUT.....	7
3.2.	CONSTITUENTS OF EUT.....	7
3.3.	TEST ITEM.....	8
3.4.	GENERAL DESCRIPTION	9
4.	OPERATIONAL CONDITIONS DURING TEST	10
4.1.	GENERAL DESCRIPTION OF TEST PROCEDURES	10
4.2.	GSM TEST CONFIGURATION.....	10
4.3.	WCDMA TEST CONFIGURATION	11
4.4.	HSDPA TEST CONFIGURATION	11
4.5.	POSITION OF MODULE IN PORTABLE DEVICES.....	14
4.6.	PICTURE OF HOST PRODUCT	15
5.	SAR MEASUREMENTS SYSTEM CONFIGURATION	17
5.1.	SAR MEASUREMENT SET-UP	17
5.2.	DASY4 E-FIELD PROBE SYSTEM	18
5.2.1.	EX3DV4 Probe Specification.....	18
5.2.2.	E-field Probe Calibration.....	19
5.3.	OTHER TEST EQUIPMENT.....	19
5.3.1.	Device Holder for Transmitters.....	19
5.3.2.	Phantom.....	20
5.4.	SCANNING PROCEDURE.....	20
5.5.	DATA STORAGE AND EVALUATION	22
5.5.1.	Data Storage	22
5.5.2.	Data Evaluation by SEMCAD.....	22
5.6.	SYSTEM CHECK.....	25
5.7.	EQUIVALENT TISSUES	26
6.	LABORATORY ENVIRONMENT.....	26
7.	CHARACTERISTICS OF THE TEST	27
7.1.	APPLICABLE LIMIT REGULATIONS	27
7.2.	APPLICABLE MEASUREMENT STANDARDS.....	27
8.	CONDUCTED OUTPUT POWER MEASUREMENT	28
8.1.	SUMMARY.....	28
8.2.	CONDUCTED POWER RESULTS	28
9.	TEST RESULTS.....	30
9.1.	DIELECTRIC PERFORMANCE	30
9.2.	SYSTEM CHECK.....	30
9.3.	SUMMARY OF MEASUREMENT RESULTS	31
9.3.1.	GSM850 (GPRS/EGPRS)	31
9.3.2.	GSM1900 (GPRS/EGPRS)	33
9.3.3.	WCDMA Band II (WCDMA/HSDPA)	35
9.3.4.	WCDMA Band V (WCDMA/HSDPA)	37

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 5 of 166

9.4. CONCLUSION	38
10. MEASUREMENT UNCERTAINTY.....	39
11. MAIN TEST INSTRUMENTS.....	40
12. TEST PERIOD.....	40
13. TEST LOCATION	40
ANNEX A: TEST LAYOUT.....	41
ANNEX B:SYSTEM CHECK RESULTS	43
ANNEX C: GRAPH RESULTS	51
ANNEX D: PROBE CALIBRATION CERTIFICATE	131
ANNEX E: D835V2 DIPOLE CALIBRATION CERTIFICATE.....	140
ANNEX F: D1900V2 DIPOLE CALIBRATION CERTIFICATE	149
ANNEX G: DAE4 CALIBRATION CERTIFICATE	158
ANNEX H: THE EUT APPEARANCES AND TEST CONFIGURATION	163

1. COMPETENCE AND WARRANTIES

TA Technology (Shanghai) Co., Ltd. is a test laboratory competent to carry out the tests described in this test report.

TA Technology (Shanghai) Co., Ltd. guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

TA Technology (Shanghai) Co., Ltd. is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

2. GENERAL CONDITIONS

This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This document is only valid if complete; no partial reproduction can be made without written approval of **TA Technology (Shanghai) Co., Ltd.**

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 7 of 166

3. DESCRIPTION OF EUT

3.1. Addressing Information Related to EUT

Table 1: Applicant (The Client)

Name or Company	HUAWEI Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

Table 2: Manufacturer

Name or Company	HUAWEI Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

3.2. Constituents of EUT

Table 3: Constituents of Samples

Description	Model	Serial Number	Manufacturer
HSPA+ USB Slider	E182E	359740020010060	HUAWEI Technologies Co., Ltd.

Note:

The EUT appearances see ANNEX H.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 8of 166

3.3. Test item

Table 4: Test item

device type :	portable device	
exposure category:	uncontrolled environment / general population	
device operating configurations :		
operating mode(s):	GSM850; (tested) GSM1900; (tested) WCDMA Band II; (tested) WCDMA Band V; (tested)	
Test Modulation:	(GSM) GMSK (WCDMA)QPSK	
GPRS mobile station class :	B	
GPRS multislots class :	12	
EGPRS multislots class:	12	
HSDPA UE category	14	
Maximum no. of timeslots in uplink:	4	
operating frequency range(s)	transmitter frequency range	receiver frequency range
GSM850: (tested)	824.2 MHz ~ 848.8 MHz	869.2 MHz ~ 893.8 MHz
GSM1900: (tested)	1850.2 MHz ~ 1909.8 MHz	1930.2 MHz ~ 1989.8 MHz
WCDMA Band II; (tested)	1852.4 MHz ~ 1907.6MHz	1932.4 MHz ~1987.6MHz
WCDMA Band V; (tested)	826.4 MHz ~ 846.6 MHz	871.4 MHz ~ 891.6 MHz
Power class	GSM 850: 4, tested with power level 5	
	GSM 1900: 1, tested with power level 0	
	WCDMA Band II: 3, tested with maximum output power	
	WCDMA Band V: 3, tested with maximum output power	
Test channel (Low –Middle –High)	128-192-251	(GSM850) (tested)
	512 - 661-810	(GSM1900) (tested)
	9262 -9400 -9538	(WCDMA Band II) (tested)
	4132 -4182 -4233	(WCDMA Band V) (tested)
hardware version:	CP12TCPU	
software version:	11.807.03.tst.00	
antenna type:	integrated antenna	
Used host products:	IBM T61	
	BenQ Joybook R55V	

3.4. General Description

Equipment Under Test (EUT) is a HSPA+ USB Slider with internal antenna. During SAR test of the EUT, it was connected to a portable computer. SAR is tested for the EUT respectively for GSM 850, GSM1900, WCDMA Band II and WCDMA Band V. The EUT has GPRS (class 12), EGPRS (class 12) and WCDMA/HSDPA functions.

Since the EUT only has the data transfer function, but does not have the voice transfer function, the tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS and EGPRS, The tests in the band of WCDMA Band II and WCDMA Band V are performed in the mode of WCDMA and HSDPA. The measurements were performed in combination with two host product (IBM T61, BenQ Joybook R55V). IBM T61 laptop has vertical USB slot and BenQ Joybook R55V laptop has horizontal USB slot.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

4. OPERATIONAL CONDITIONS DURING TEST

4.1. General description of test procedures

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

The device that connected to host computers must be tested with the device position for all applicable orientations. The measurements were performed in combination with two host products (IBM T61, BenQ Joybook R55V).

4.2. GSM Test Configuration

For the body SAR tests for GSM 850, GSM 1900, a communication link is set up with a System Simulator (SS) by air link. The EUT is commanded to operate at maximum transmitting power. Since the EUT only has the data transfer function, but does not have the speech transfer function.

The tests in the band of GSM 850, GSM 1900 are performed in the mode of GPRS and EGPRS. The GPRS class is 12 for this EUT; it has at most 4 timeslots in uplink. The EGPRS class is 12 for this EUT; it has at most 4 timeslots in uplink. According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot. The allowed power reduction in the multi-slot configuration is as following:

Table 5: The allowed power reduction in the multi-slot configuration

Number of timeslots in uplink assignment	Permissible nominal reduction of maximum output power,(dB)
1	0
2	0 to 3,0
3	1,8 to 4,8
4	3,0 to 6,0

For this EUT, the tests for GSM 850 GPRS and GSM 1900 GPRS band will be performed under the following 4 setups at one same test position:

- 1) using 1 timeslot in uplink with the power of maximum power
- 2) using 2 timeslots in uplink with the power reduced 2dB
- 3) using 3 timeslots in uplink with the power reduced 4dB
- 4) using 4 timeslots in uplink with the power reduced 6dB

After drawn the worst case, the tests will be continued to perform with the same EUT setup for the Whole tests for GSM850 GPRS and GSM1900 GPRS.

4.3. WCDMA Test Configuration

As the SAR body tests for WCDMA Band II and WCDMA Band V, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to all "all '1's"
- 2) Test loop Mode 1

For the output power, the configurations for the DPCCH and DPDCH₁ are as followed (EUT do not support the DPDCH_{2-n})

Table 6: The configurations for the DPCCH and DPDCH₁

	Channel Bit Rate(kbps)	Channel Symbol Rate(kcps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH ₁	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320
	960	960	4	1	640

SAR is tested with 12.2kps RMC and not required for other spreading codes (64,144, and 384 kbps RMC) and multiple DPDCH_n, because the maximum output power for each of these other configurations < 0.25dB higher than 12.2kbps RMC and the multiple DPDCH_n is not applicable for the EUT.

4.4. HSDPA Test Configuration

SAR for body exposure configurations is measured according to the "Body SAR Measurements" procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to the UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be

TA Technology (Shanghai) Co., Ltd.

Test Report

configured with a CQI feedback cycle of 4 ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c, β_d), and HS-DPCCH power offset parameters(Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) should be set according to values indicated in the Table below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Table 7: Subtests for UMTS Release 5 HSDPA

Sub-set	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs} (note 1, note 2)	CM (dB) (note 3)	MPR(dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (note 4)	15/15 (note 4)	64	12/15 (note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8$ $\Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 8$ ($A_{hs} = 30/15$) with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 7$ ($A_{hs} = 24/15$) with $\beta_{hs} = 24/15 * \beta_c$.
 Note3: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TFC1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Table 8: Settings of required H-Set 1 QPSK in HSDPA mode

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	534
Inter-TTI Distance	TTI's	3
Number of HARQ Processes	Processes	2
Information Bit Payload (N_{INF})	Bits	3202
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	4800
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	9600
Coding Rate	/	0.67
Number of Physical Channel Codes	Codes	5
Modulation	/	QPSK

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 13of 166

Table 9: HSDPA UE category

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum Transport Bits/HS-DSCH	Total Channel
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

4.5. Position of module in Portable devices

The measurements were performed in combination with two host product (IBMT61, BenQ Joybook R55V). IBM T61 laptop has vertical USB slot and BenQ Joybook R55V laptop has horizontal USB slot.

A test distance of 5mm or less, according to KDB 447498, should be considered for the orientation that can satisfy such requirements.

For each channel, the EUT is tested at the following 5 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. The back side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-a)
- Test Position 2: The EUT is connected to the portable computer with horizontal USB slot. The front side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-b)
- Test Position3: The EUT is connected to the portable computer with horizontal USB slot. The top side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-c)
- Test Position 4: The EUT is connected to the portable computer with vertical USB slot. The left side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-d)
- Test Position 5: The EUT is connected to the portable computer with vertical USB slot. The right side of the EUT towards the bottom of the flat phantom. (ANNEX H Picture 7-e)

4.6. Picture of host product

During the test, IBM T61 and BenQ Joybook R55V laptop was used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: IBM T61 Close



Picture 1-b: IBM T61 Open



Picture 1-c: BenQ Joybook R55V(118) Close



Picture 1-d: BenQ Joybook R55V(118) Open



Picture 1-e: BenQ Joy book R55V(118) with horizontal USB slot



Picture 1-f: IBM T61 with Vertical USB slot

Picture 1: Computer as a test assistant

5. SAR MEASUREMENTS SYSTEM CONFIGURATION

5.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

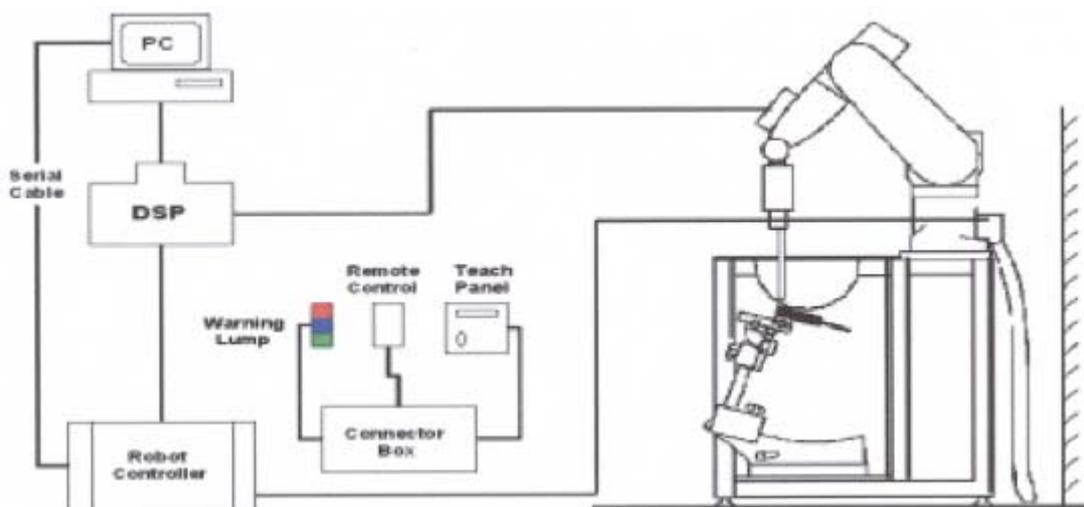


Figure 1. SAR Lab Test Measurement Set-up

5.2. Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

5.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Figure 2. EX3DV4 E-field Probe



Figure 3. EX3DV4 E-field probe

5.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),
C = Heat capacity of tissue (brain or muscle),
 ΔT = Temperature increase due to RF exposure.
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:
 σ = Simulated tissue conductivity,
 ρ = Tissue density (kg/m³).

5.3. Other Test Equipment

5.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the inference of the clamp on the test results could thus be lowered.



Figure 4. Device Holder

5.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



Figure 5. Generic Twin Phantom

5.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)
- Area Scan
The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains

unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

5.5. Data Storage and Evaluation

5.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai ₀ , ai ₁ , ai ₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcp _i
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	
	- Density	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With V_i = compensated signal of channel i (i = x, y, z)

U_i = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1} f + a_{i2} f^2) / f$

With V_i = compensated signal of channel i (i = x, y, z)

$Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes

$ConvF$ = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \dots) / (\dots \cdot 1000)$$

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 24 of 166

with **SAR** = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with **P_{pwe}** = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

5.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 14.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

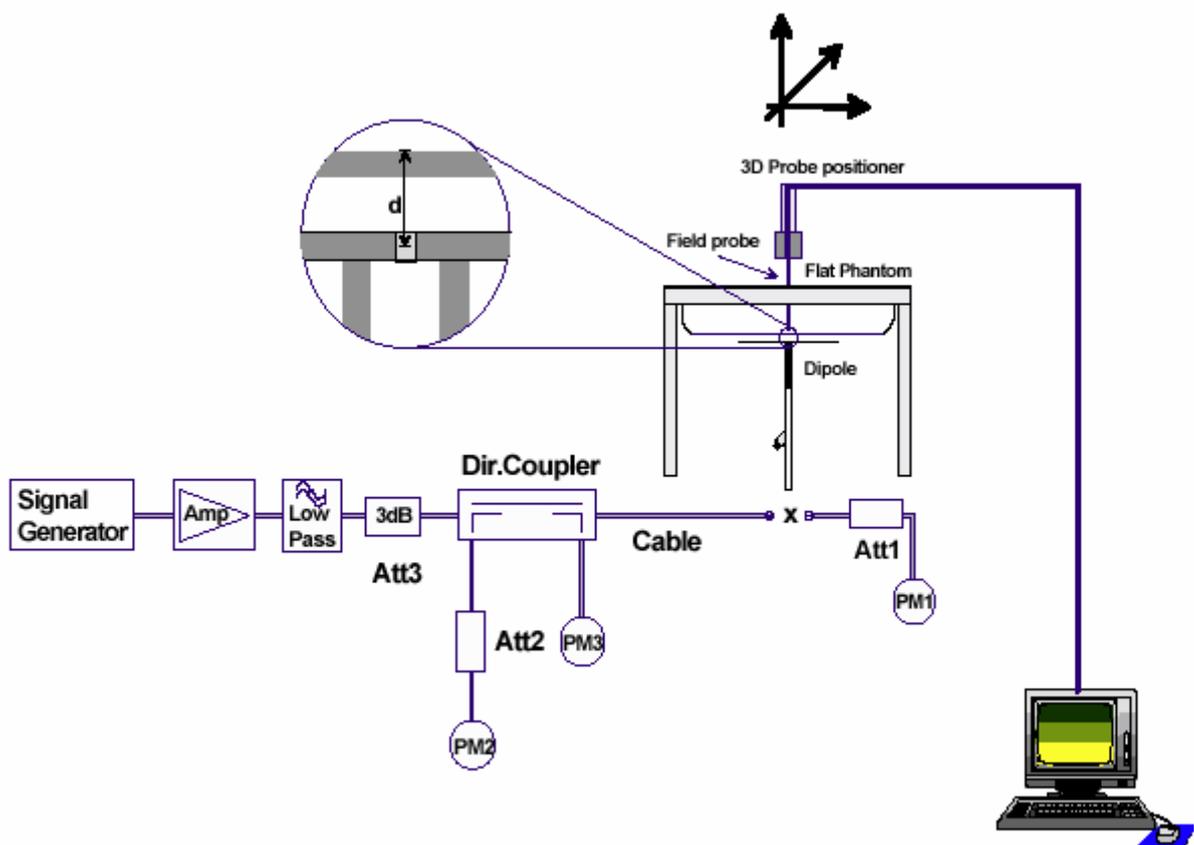


Figure 6. System Check Set-up

5.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol monobutyl, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 10 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by OET 65.

Table 10: Composition of the Body Tissue Equivalent Matter

MIXTURE%	FREQUENCY(Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

MIXTURE%	FREQUENCY (Body) 1900MHz
Water	69.91
Glycol monobutyl	29.96
Salt	0.13
Dielectric Parameters Target Value	f=1900MHz $\epsilon=53.3$ $\sigma=1.52$

6. LABORATORY ENVIRONMENT

Table 11: The Ambient Conditions during Test

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

7. CHARACTERISTICS OF THE TEST

7.1. Applicable Limit Regulations

ANSI C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

7.2. Applicable Measurement Standards

OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

IEC 62209-2:2008(106/162/CDV): Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body .(frequency rang of 30MHz to 6GHz).

8. CONDUCTED OUTPUT POWER MEASUREMENT

8.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

8.2. Conducted Power Results

Table 12: Conducted Power Measurement Results

GSM 850+GPRS		Conducted Power		
		Channel 128	Channel 192	Channel 251
		(824.2MHz)	(837MHz)	(848.8MHz)
Before Test (dBm)		29.51	29.53	29.75
After Test (dBm)		29.51	29.54	29.76
GSM 1900+GPRS		Conducted Power		
		Channel 512	Channel 661	Channel 810
		(1850.2MHz)	(1880MHz)	(1909.8MHz)
Before Test (dBm)		24.48	24.50	24.47
After Test (dBm)		24.49	24.51	24.48
WCDMA Band V		Conducted Power		
		Channel 4132	Channel 4182	Channel 4233
		(826.4MHz)	(836.4MHz)	(846.6MHz)
12.2kbps RMC	Before Test (dBm)	18.81	18.87	18.87
	After Test (dBm)	18.80	18.87	18.88
64kbps RMC	Before Test (dBm)	18.85	18.80	18.79
	After Test (dBm)	18.85	18.81	18.78
144kbps RMC	Before Test (dBm)	18.79	18.84	18.90
	After Test (dBm)	18.78	18.84	18.91
384kbps RMC	Before Test (dBm)	18.87	18.77	18.85
	After Test (dBm)	18.88	18.76	18.84
WCDMA Band V+HSDPA		Conducted Power		
		Channel 4132	Channel 4182	Channel 4233
		(826.4MHz)	(836.4MHz)	(846.6MHz)

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 29 of 166

Sub Test - 1	Before Test (dBm)	18.78	18.78	18.80
	After Test (dBm)	18.77	18.77	18.80
Sub Test - 2	Before Test (dBm)	18.98	18.81	18.91
	After Test (dBm)	18.99	18.81	18.90
Sub Test - 3	Before Test (dBm)	18.36	18.04	18.02
	After Test (dBm)	18.35	18.04	18.01
Sub Test - 4	Before Test (dBm)	17.99	17.97	18.40
	After Test (dBm)	17.99	17.97	18.41
WCDMA Band II		Conducted Power		
		Channel 9262	Channel 9400	Channel 9538
		(1852.4MHz)	(1880MHz)	(1907.6MHz)
12.2kbps RMC	Before Test (dBm)	16.96	16.88	16.75
	After Test (dBm)	16.97	16.87	16.75
64kbps RMC	Before Test (dBm)	16.84	16.79	16.63
	After Test (dBm)	16.83	16.77	16.64
144kbps RMC	Before Test (dBm)	16.79	16.82	16.70
	After Test (dBm)	16.78	16.81	16.71
384kbps RMC	Before Test (dBm)	16.80	16.80	16.77
	After Test (dBm)	16.81	16.81	16.77
WCDMA Band II+HSDPA		Conducted Power		
		Channel 9262	Channel 9400	Channel 9538
		(1852.4MHz)	(1880MHz)	(1907.6MHz)
Sub Test - 1	Before Test (dBm)	16.78	16.40	16.65
	After Test (dBm)	16.77	16.41	16.65
Sub Test - 2	Before Test (dBm)	16.70	16.42	16.25
	After Test (dBm)	16.71	16.43	16.23
Sub Test - 3	Before Test (dBm)	16.00	15.95	16.10
	After Test (dBm)	16.01	15.94	16.11
Sub Test - 4	Before Test (dBm)	15.98	16.00	16.35
	After Test (dBm)	15.97	16.01	16.35

9. TEST RESULTS

9.1. Dielectric Performance

Table 13: Dielectric Performance of Body Tissue Simulating Liquid

Frequency	Description	Dielectric Parameters		Temp °C
		ϵ_r	σ (s/m)	
835MHz (body)	Target value ±5% window	55.20 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2009-5-21	55.93	1.00	21.5
	Measurement value 2009-6-3	55.94	1.01	21.5
1900MHz (body)	Target value ±5% window	53.30 50.64 — 55.97	1.52 1.44 — 1.60	/
	Measurement value 2009-5-23	52.85	1.53	21.7
	Measurement value 2009-6-4	51.02	1.56	21.7

9.2. System check

Table 14: System Check for Body tissue stimulant

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp °C
		10g	1g	ϵ_r	σ (s/m)	
835MHz	Target value ±10% window	1.59 1.431—1.749	2.41 2.169 — 2.651	53.6	1.0	/
	Measurement value 2009-5-21	1.58	2.40	55.93	1.00	21.9
	Measurement value 2009-6-3	1.57	2.41	55.94	1.01	21.9
1900 MHz	Target value ±10% window	5.36 4.824—5.896	10.2 9.18 — 11.22	52.4	1.59	/
	Measurement value 2009-5-23	5.14	10.0	52.85	1.53	21.7
	Measurement value 2009-6-4	5.13	10.1	51.02	1.56	21.7

Note: 1. The graph results see ANNEX B.

2. Target Values used derive from the calibration certificate and 250 mW is used as feeding power to the Calibrated dipole.

9.3. Summary of Measurement Results

9.3.1. GSM850 (GPRS/EGPRS)

Table 15: SAR Values [GSM850 (GPRS/EGPRS)]

Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body			Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average		
BenQ Joybook R55V						
Test Position 1	4 timeslots	Middle	0.191	0.291	-0.047	Figure 15
	3 timeslots	Middle	0.228	0.346	0.083	Figure 17
	2 timeslots	High	0.266	0.408	-0.106	Figure 19
		Middle	0.254	0.390	0.152	Figure 21
		Low	0.246	0.371	-0.106	Figure 23
	1 timeslot	Middle	0.212	0.325	0.193	Figure 25
Test Position 2	2 timeslots	Middle	0.236 (max.cube)	0.342 (max.cube)	-0.099	Figure 27
Test Position 3	2 timeslots	Middle	0.056	0.154	-0.021	Figure 29
IBM T61						
Test Position 4	2 timeslots	Middle	0.168	0.263	-0.192	Figure 31
Test Position 5	2 timeslots	Middle	0.216	0.338	-0.020	Figure 33
Worst case position of GPRS with EGPRS						
Test Position 1	2 timeslots	High	0.267	0.411	0.057	Figure 35

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 16: SAR Values (GSM850, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 1	initial position	High	0.532	0.266	0.665
	5mm	High	0.219		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

9.3.2. GSM1900 (GPRS/EGPRS)

Table 17: SAR Values [GSM1900 (GPRS/EGPRS)]

Limit of SAR (W/kg)			10 g Average	1g Average	Power Drift(dB)	Graph Results
			2.0	1.6	± 0.21	
Test Case Of Body			Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Different Timeslots	Channel	10 g Average	1 g Average		
BenQ Joybook R55V						
Test Position 1	4 timeslots	Middle	0.171 (max.cube)	0.299 (max.cube)	0.152	Figure 37
	3 timeslots	Middle	0.231	0.413	-0.072	Figure 39
	2 timeslots	Middle	0.255	0.491	0.050	Figure 41
	1 timeslot	Middle	0.221	0.410	0.070	Figure 43
Test Position 2	2 timeslots	High	0.232	0.458	0.094	Figure 45
		Middle	0.271	0.539	0.063	Figure 47
		Low	0.289	0.616	-0.023	Figure 49
Test Position 3	2 timeslots	Middle	0.102	0.232	-0.024	Figure 51
IBM T61						
Test Position 4	2 timeslots	Middle	0.219	0.430	-0.015	Figure 53
Test Position 5	2 timeslots	Middle	0.136	0.240	0.060	Figure 55
Worst case position of GPRS with EGPRS						
Test Position 2	2 timeslots	Low	0.305	0.600	-0.181	Figure 57

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 18: SAR Values (GSM1900, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 2	initial position	Low	0.877	0.439	1.096
	5mm	Low	0.422		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

9.3.3. WCDMA Band II (WCDMA/HSDPA)

Table 19: SAR Values [WCDMA Band II (WCDMA/HSDPA)]

Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
BenQ Joybook R55V					
Test Position 1	High	0.478	0.889	-0.182	Figure 59
	Middle	0.465	0.871	0.007	Figure 61
	Low	0.511	0.948	0.036	Figure 63
Test Position 2	High	0.551 (max.cube)	0.988 (max.cube)	-0.105	Figure 65
	Middle	0.590	1.110	-0.002	Figure 67
	Low	0.595	1.140	-0.131	Figure 69
Test Position 3	Middle	0.258	0.620	-0.098	Figure 71
IBM T61					
Test Position 4	Middle	0.332	0.639	-0.185	Figure 73
Test Position 5	Middle	0.235	0.420	0.072	Figure 75
Worst case position of RMC with HSDPA					
Test Position 2	Low	0.604	1.140	-0.055	Figure 77

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

TA Technology (Shanghai) Co., Ltd.
Test Report

Table 20: SAR Values (WCDMA Band II, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 2	initial position	Low	1.530	0.765	1.913
	5mm		0.813		
	10mm		0.462		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

TA Technology (Shanghai) Co., Ltd.

Test Report

9.3.4. WCDMA Band V (WCDMA/HSDPA)

Table 21: SAR Values [WCDMA Band V (WCDMA/HSDPA)]

Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift (dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift (dB)	
		10 g Average	1 g Average		
Different Test Position	Channel				
BenQ Joybook R55V					
Test Position 1	Middle	0.174 (max.cube)	0.267 (max.cube)	0.110	Figure 79
Test Position 2	High	0.170 (max.cube)	0.288 (max.cube)	-0.085	Figure 81
	Middle	0.160 (max.cube)	0.270 (max.cube)	0.013	Figure 83
	Low	0.123 (max.cube)	0.185 (max.cube)	0.022	Figure 85
Test Position 3	Middle	0.059	0.175	-0.035	Figure87
IBM T61					
Test Position 4	Middle	0.137	0.211	-0.198	Figure 89
Test Position 5	Middle	0.140	0.217	0.050	Figure 91
Worst case position of RMC with HSDPA					
Test Position 2	High	0.168 (max.cube)	0.284 (max.cube)	0.030	Figure 93

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB (< 0.8W/kg) lower than the SAR limit, testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst case.
4. The (max.cube) labeling indicates that during the grid scanning an additional peak was found which was within 2.0dB of the highest peak. The value of the highest cube is given in the table above; the value from the second assessed cube is given in the SAR distribution plots (See ANNEX C).

Table 22: SAR Values (WCDMA Band V, enhanced energy coupling at increased separation distances)

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 2	initial position	High	0.352	0.176	0.440
	5mm		0.139		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

9.4. Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this report. Maximum localized SAR_{1g} is 1.14W/kg that is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 39 of 166

10. MEASUREMENT UNCERTAINTY

No.	source	Type	Uncertainty Value (%)	Probability Distribution	k	c_i	Standard uncertainty u_i (%)	Degree of freedom V_{eff} or v_i
1	System repetivity	A	0.5	正态	1	1	0.5	9
Measurement system								
2	probe calibration	B	5.9	N	1	1	5.9	∞
3	axial isotropy of the probe	B	4.7	R	$\sqrt{3}$	$\sqrt{0.5}$	1.9	∞
4	Hemispherical isotropy of the probe	B	9.4	R	$\sqrt{3}$	$\sqrt{0.5}$	3.9	∞
6	boundary effect	B	1.9	R	$\sqrt{3}$	1	1.1	∞
7	probe linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
8	System detection limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
9	readout Electronics	B	1.0	N	1	1	1.0	∞
10	response time	B	0	R	$\sqrt{3}$	1	0	∞
11	integration time	B	4.32	R	$\sqrt{3}$	1	2.5	∞
12	noise	B	0	R	$\sqrt{3}$	1	0	∞
13	RF Ambient Conditions	B	3	R	$\sqrt{3}$	1	1.73	∞
14	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
15	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
16	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test sample Related								
17	-Test Sample Positioning	A	2.9	N	1	1	2.9	5
18	-Device Holder Uncertainty	A	4.1	N	1	1	4.1	5
19	-Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Physical parameter								

TA Technology (Shanghai) Co., Ltd.

Test Report

No. RZA2009-0599FCC

Page 40 of 166

20	-phantom	B	4.0	R	$\sqrt{3}$	1	2.3	∞	
21	-liquid conductivity (deviation from target)	B	5.0	R	$\sqrt{3}$	$\frac{0.6}{4}$	1.8	∞	
22	-liquid conductivity (measurement uncertainty)	B	5.0	N	1	$\frac{0.6}{4}$	3.2	∞	
23	-liquid permittivity (deviation from target)	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞	
24	-liquid permittivity (measurement uncertainty)	B	5.0	N	1	0.6	3.0	∞	
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						12.0	
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		N	k=2		24.0		

11. MAIN TEST INSTRUMENTS

Table 23: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 14, 2008	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2009	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2009	One year
05	Signal Generator	HP 8341B	2730A00804	September 14, 2008	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	Validation Kit 835MHz	D835V2	4d020	July 21, 2008	One year
08	Validation Kit 1900MHz	D1900V2	5d060	July 22, 2008	One year
09	BTS	E5515C	GB46490218	September 14, 2008	One year
10	E-field Probe	EX3DV4	3660	September 3, 2008	One year
11	DAE	DAE4	452	November 18, 2008	One year

12. TEST PERIOD

The test is performed from May 21, 2009 to June 4, 2009.

13. TEST LOCATION


The test is performed at TA Technology (Shanghai) Co., Ltd.

END OF REPORT BODY

ANNEX A: TEST LAYOUT



Picture 2 Specific Absorption Rate Test Layout

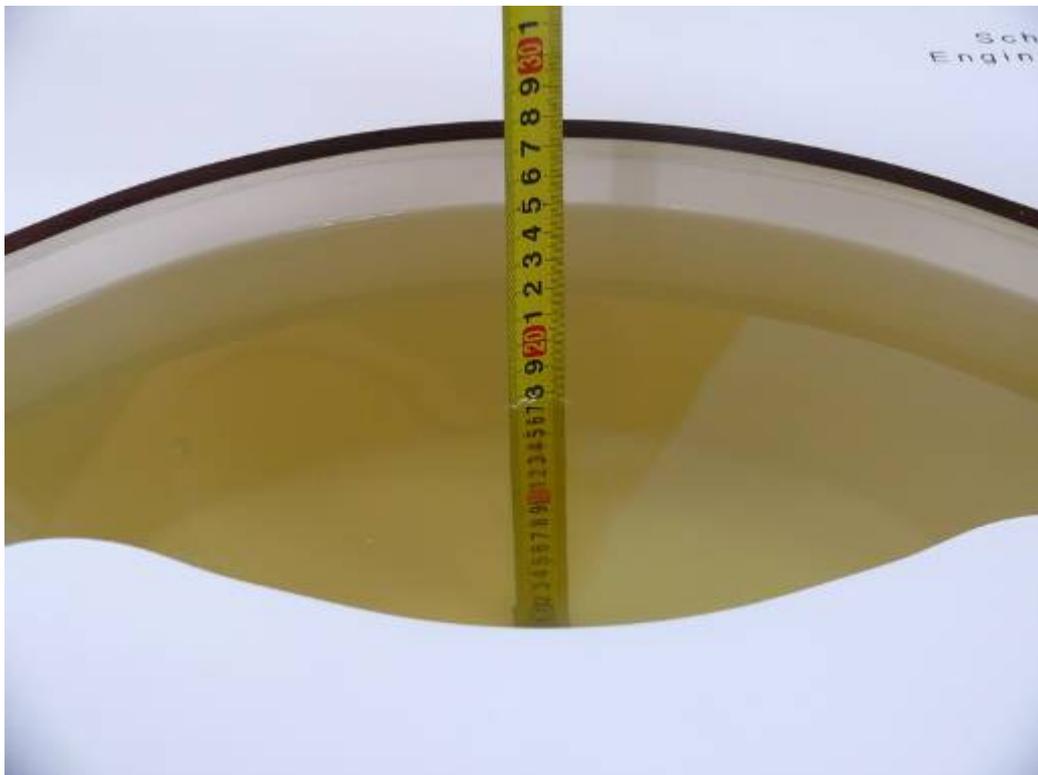

Picture 3 Liquid depth in the Flat Phantom (835 MHz)



Picture 4 Liquid depth in the Flat Phantom (1900 MHz)

ANNEX B:SYSTEM CHECK RESULTS

System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d020

Date/Time: 5/21/2009 2:32:49 AM

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 1.00$ mho/m; $\epsilon_r = 55.93$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (101x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.93 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.7 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.4 mW/g; SAR(10 g) = 1.58 mW/g

Maximum value of SAR (measured) = 2.92 mW/g

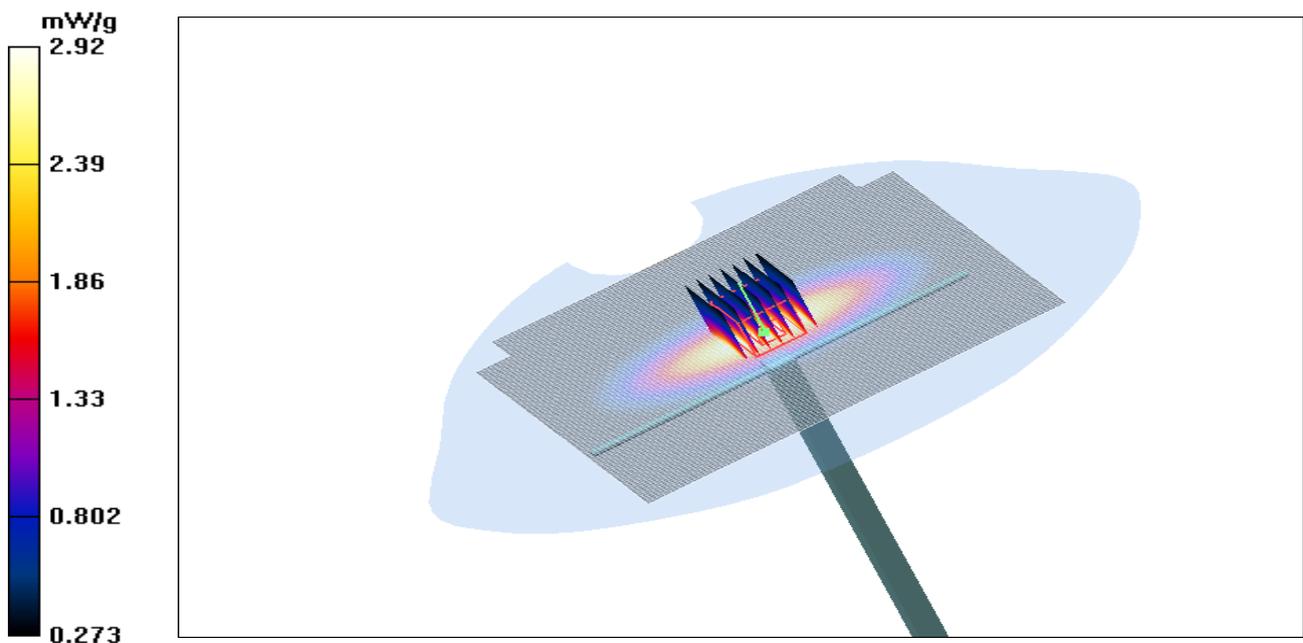


Figure 7 System Performance Check 835MHz 250mW

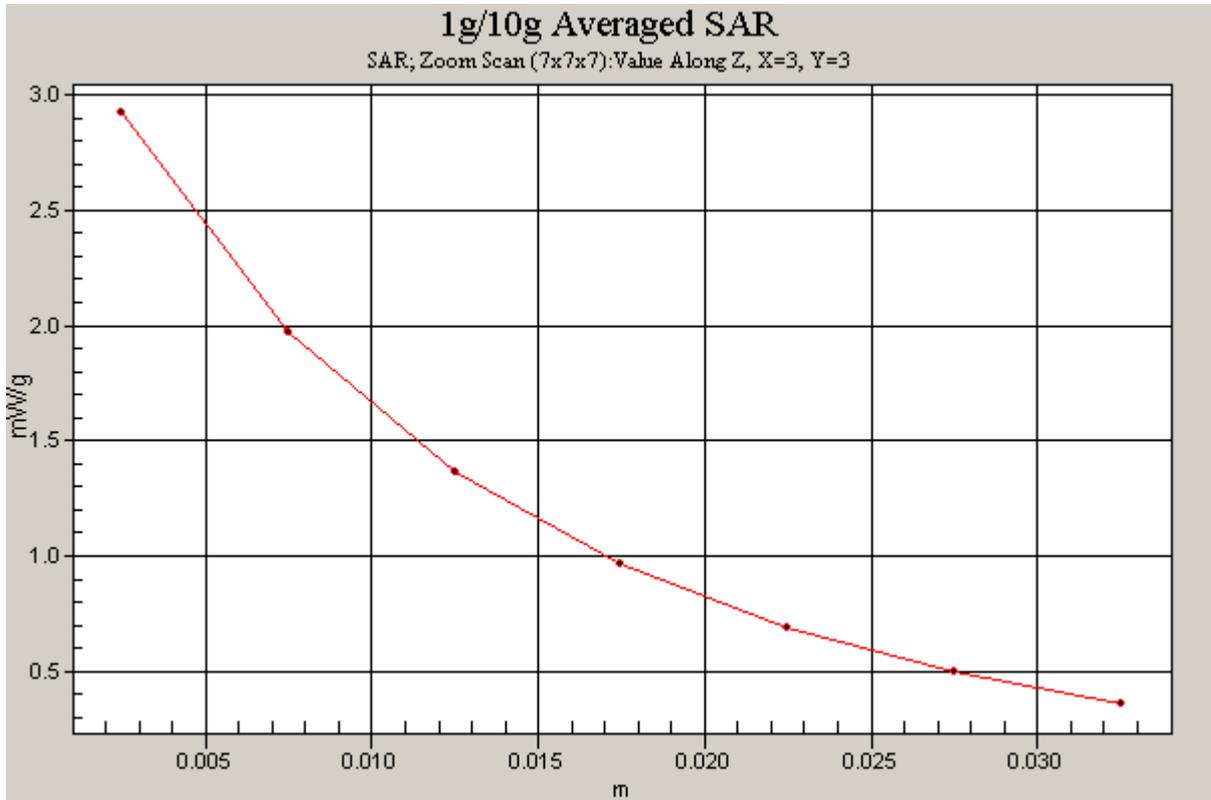


Figure 8 Z-Scan at power reference point (system Check at 835 MHz dipole)

System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d020

Date/Time: 6/3/2009 5:32:49 PM

Communication System: CW; Frequency: 835 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.01 \text{ mho/m}$; $\epsilon_r = 55.94$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (101x121x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.93 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.5 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.57 mW/g

Maximum value of SAR (measured) = 2.92 mW/g

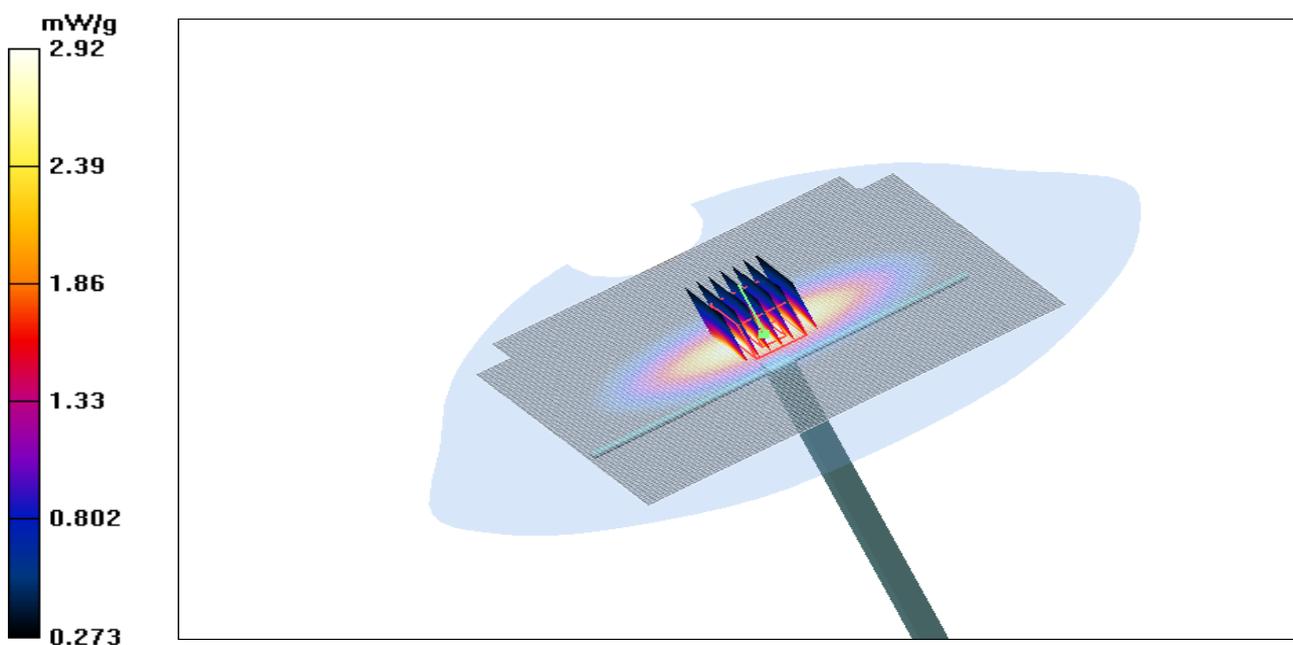


Figure 9 System Performance Check 835MHz 250mW

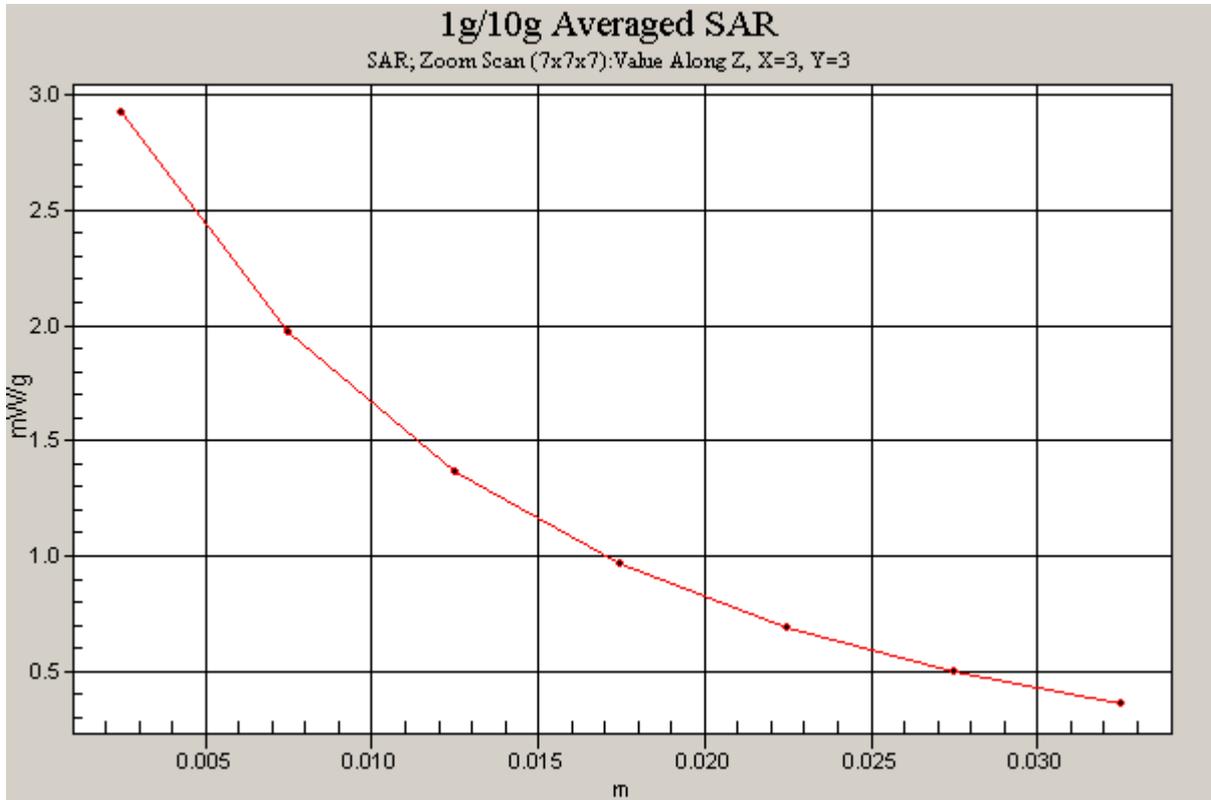


Figure 10 Z-Scan at power reference point (system Check at 835 MHz dipole)

System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d060

Date/Time: 5/23/2009 0:11:49 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.85$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.9 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.0 V/m; Power Drift = -0.012 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 10 mW/g; SAR(10 g) = 5.14 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

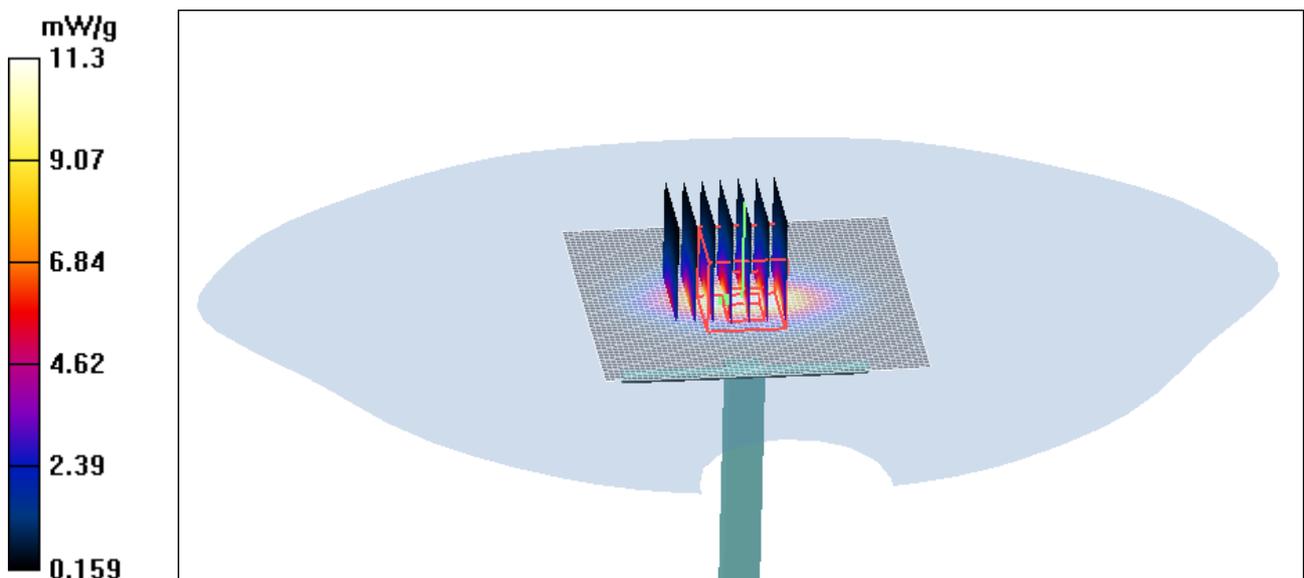


Figure 11 System Performance Check 1900MHz 250mW

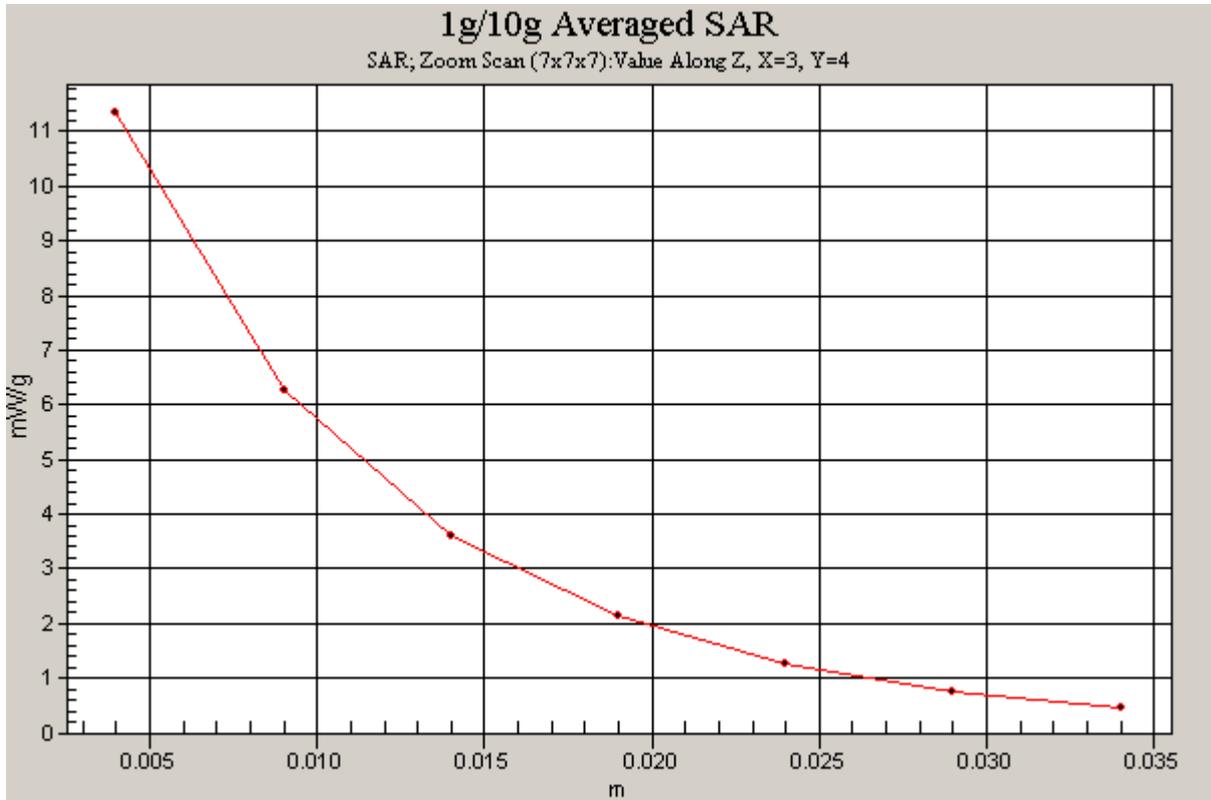


Figure 12 Z-Scan at power reference point (system Check at 1900 MHz dipole)

System Performance Check at 1900 MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d060

Date/Time: 6/4/2009 1:11:49 AM

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 51.02$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.8 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.0 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 18.8 W/kg

SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.13 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

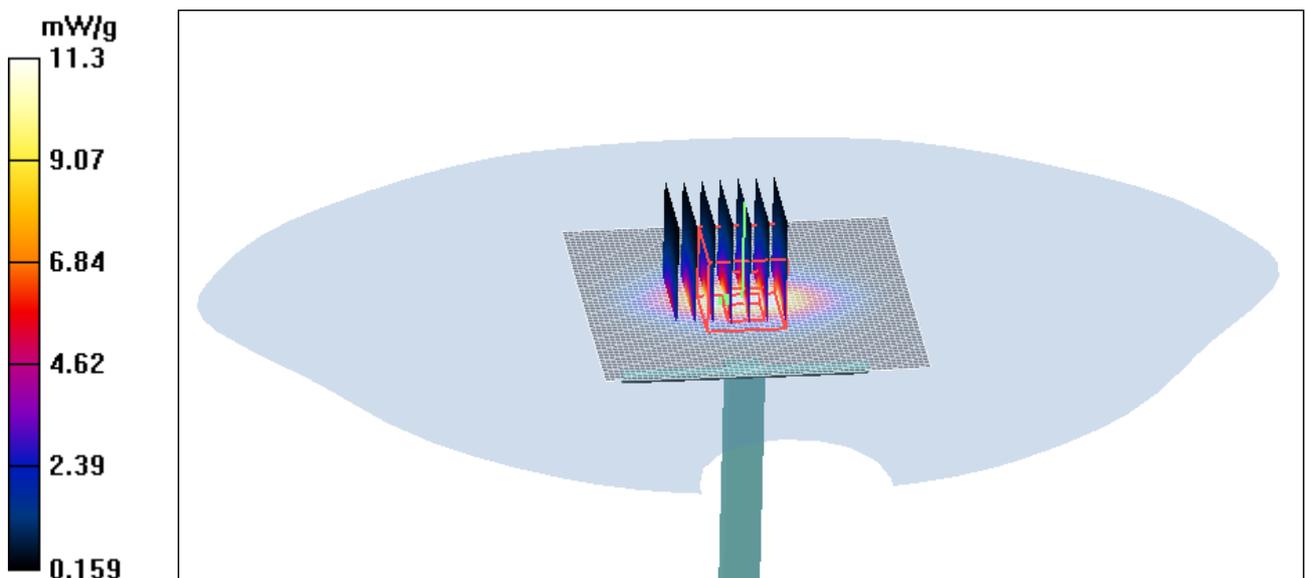


Figure 13 System Performance Check 1900MHz 250mW

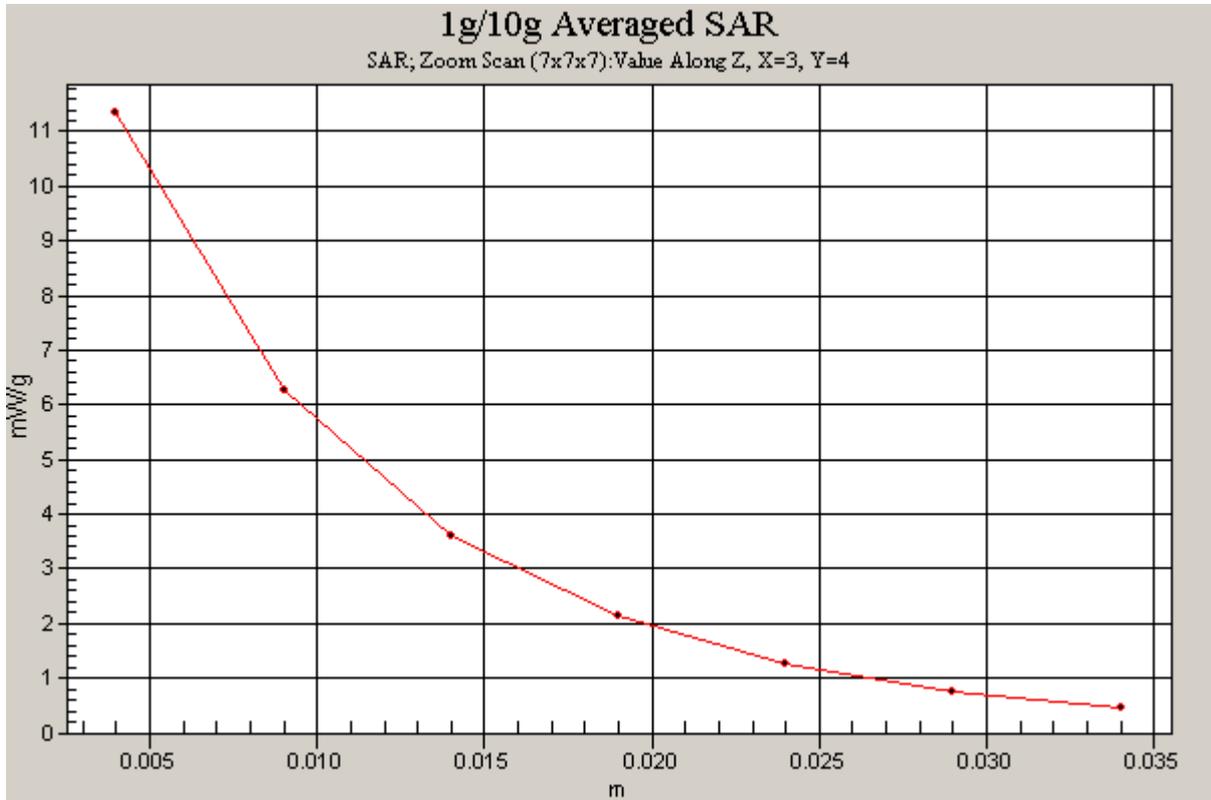


Figure 14 Z-Scan at power reference point (system Check at 1900 MHz dipole)

ANNEX C: GRAPH RESULTS

GSM 850 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 5/21/2009 4:05:55 AM

Communication System: GSM 850+GPRS(4Up); Frequency: 837 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 837$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.380 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.191 mW/g

Maximum value of SAR (measured) = 0.356 mW/g

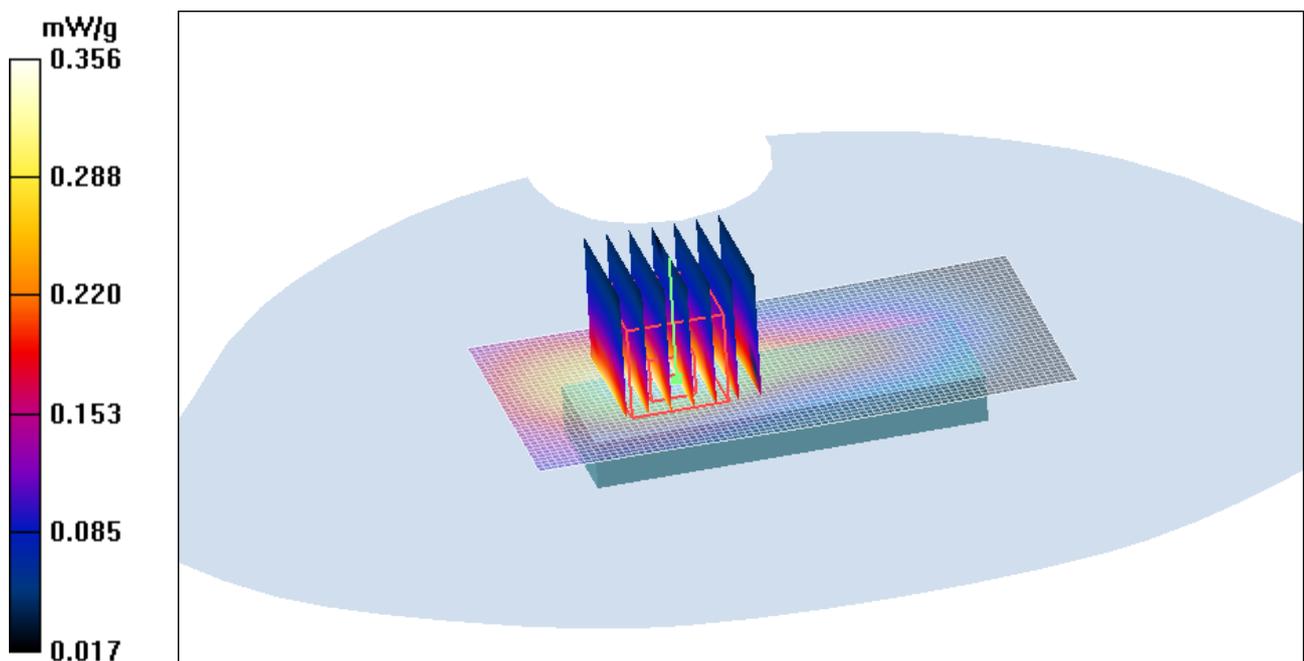


Figure 15 GSM 850 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 192

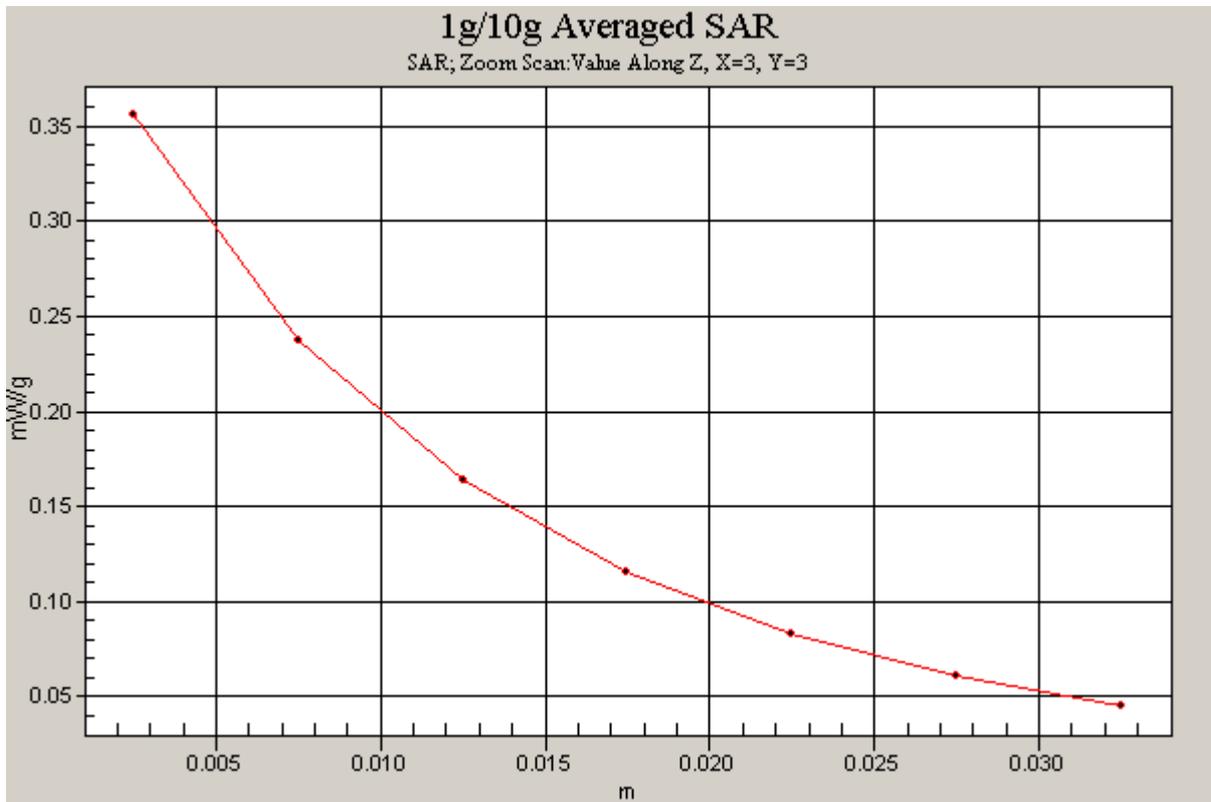


Figure 16 Z-Scan at power reference point [GSM 850 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 192]

GSM 850 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 5/21/2009 4:22:54 AM

Communication System: GSM850 + GPRS(3Up); Frequency: 837 MHz;Duty Cycle: 1:2.67

Medium parameters used: $f = 837$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liqjud Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.428 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 0.728 W/kg

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.435 mW/g

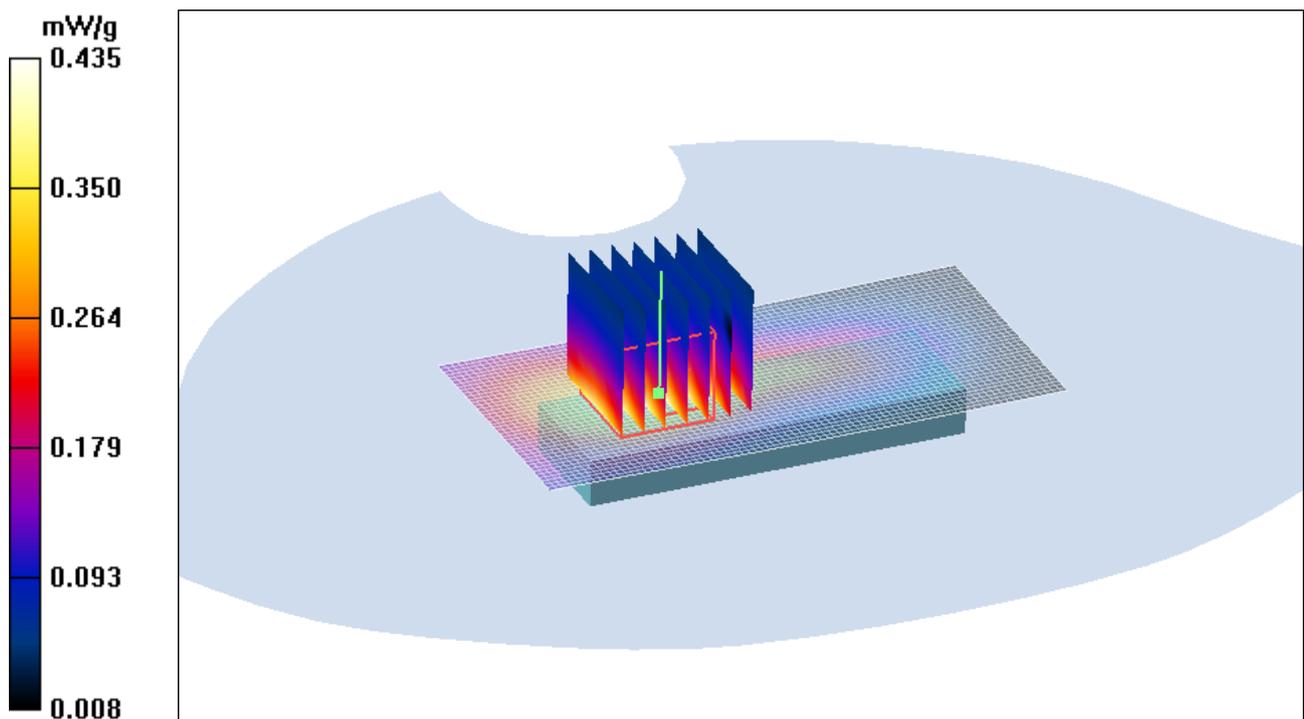


Figure 17 GSM 850 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 192

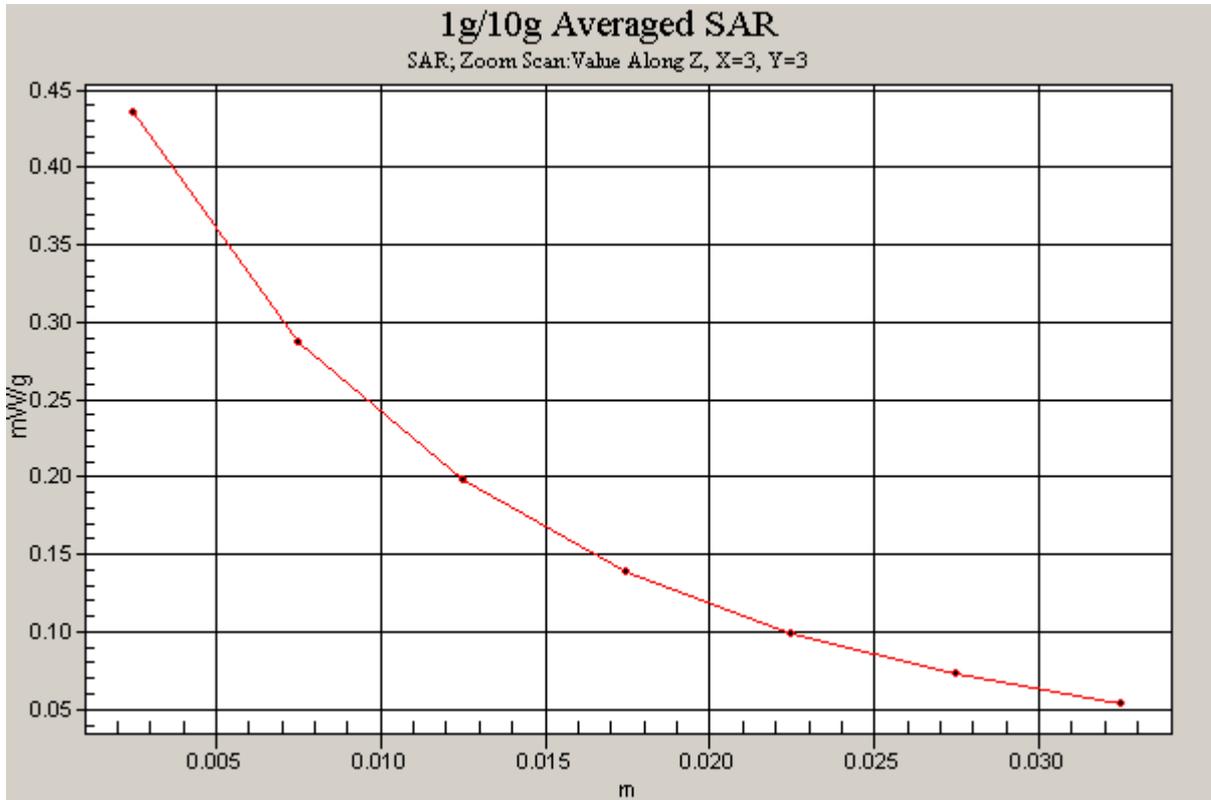


Figure 18 Z-Scan at power reference point [GSM 850 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 192]

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 High Frequency

Date/Time: 5/21/2009 1:25:51 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 848.8 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.8$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liqjud Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.493 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.1 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.613 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.266 mW/g

Maximum value of SAR (measured) = 0.493 mW/g

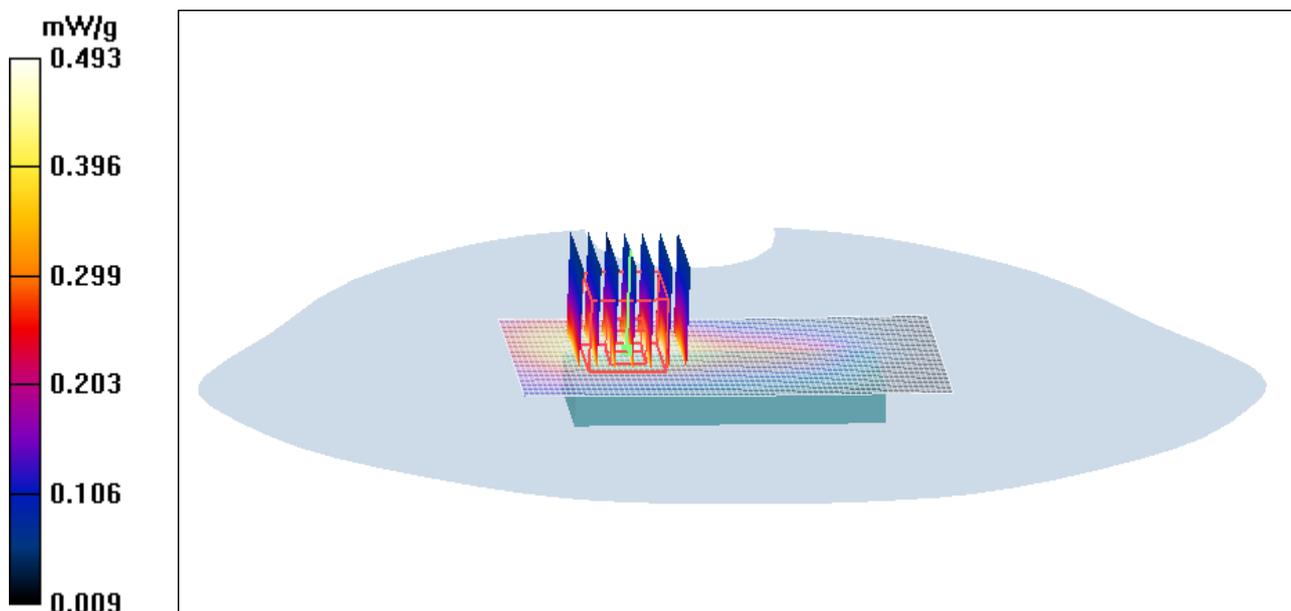


Figure 19 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 251

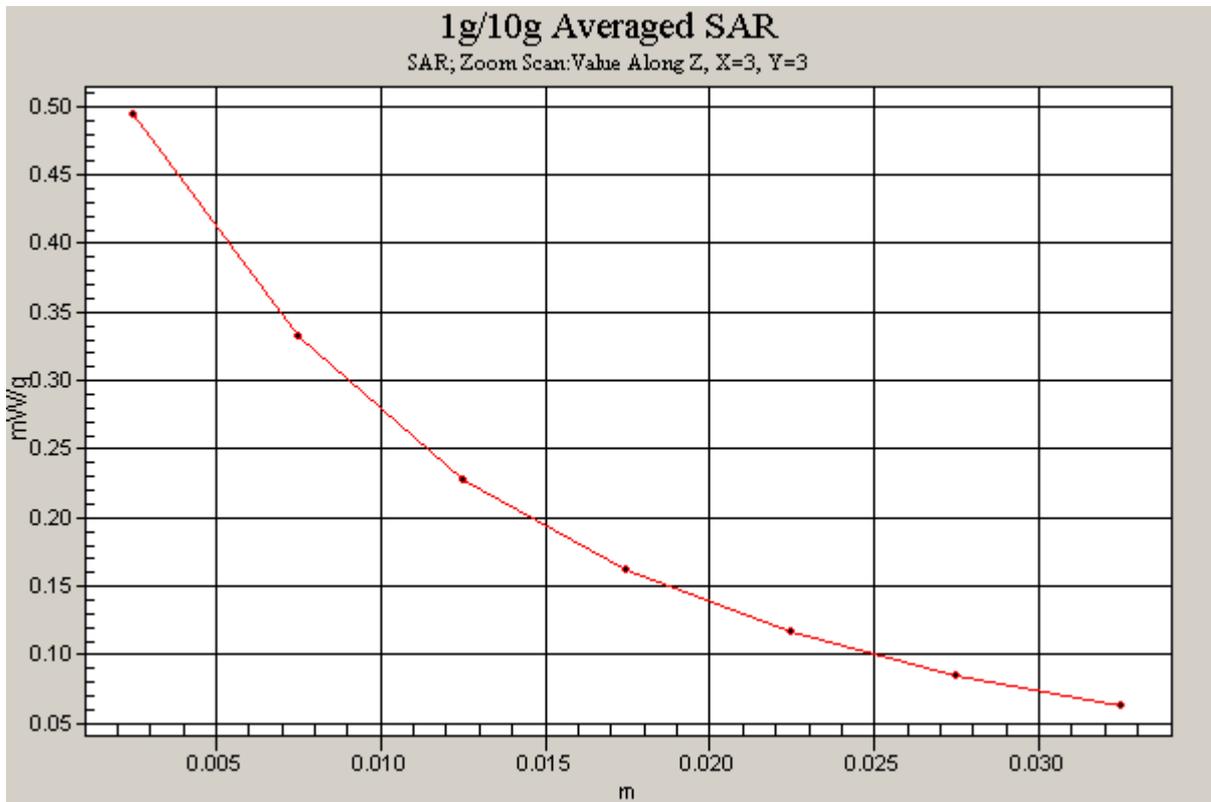


Figure 20 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 251]

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 5/21/2009 4:39:21 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.467 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.4 V/m; Power Drift = 0.152 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.254 mW/g

Maximum value of SAR (measured) = 0.478 mW/g

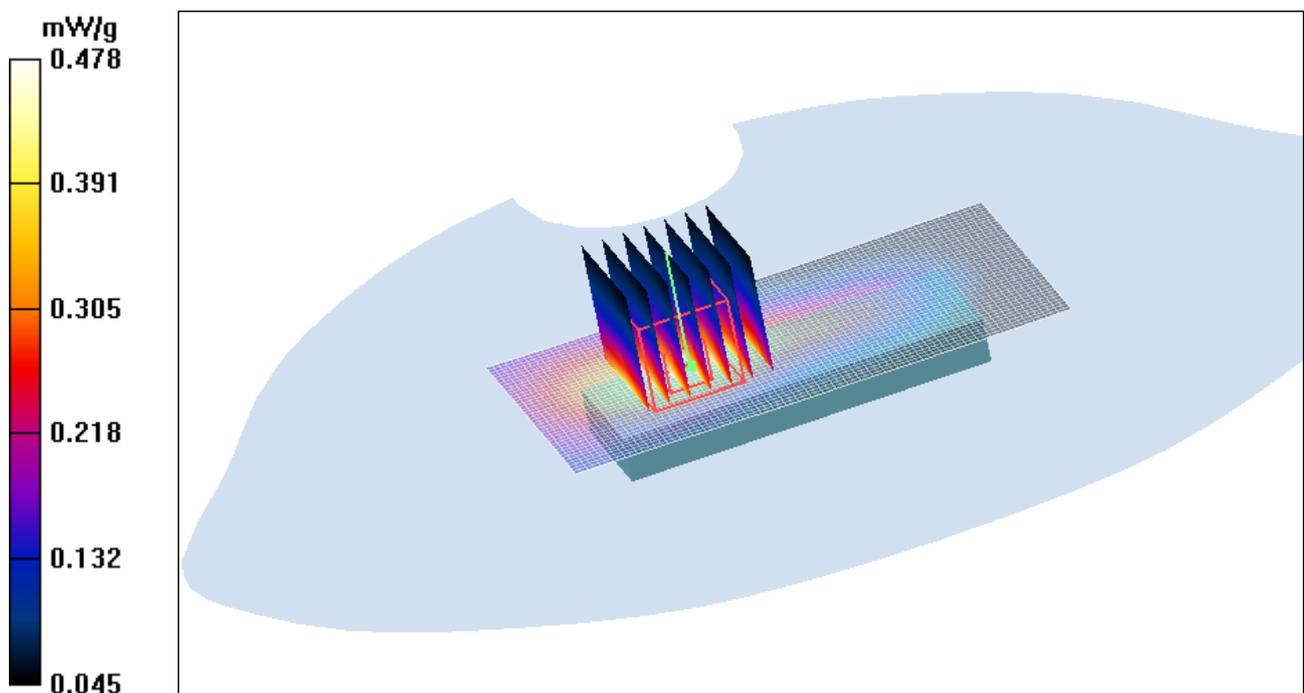


Figure 21 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 192

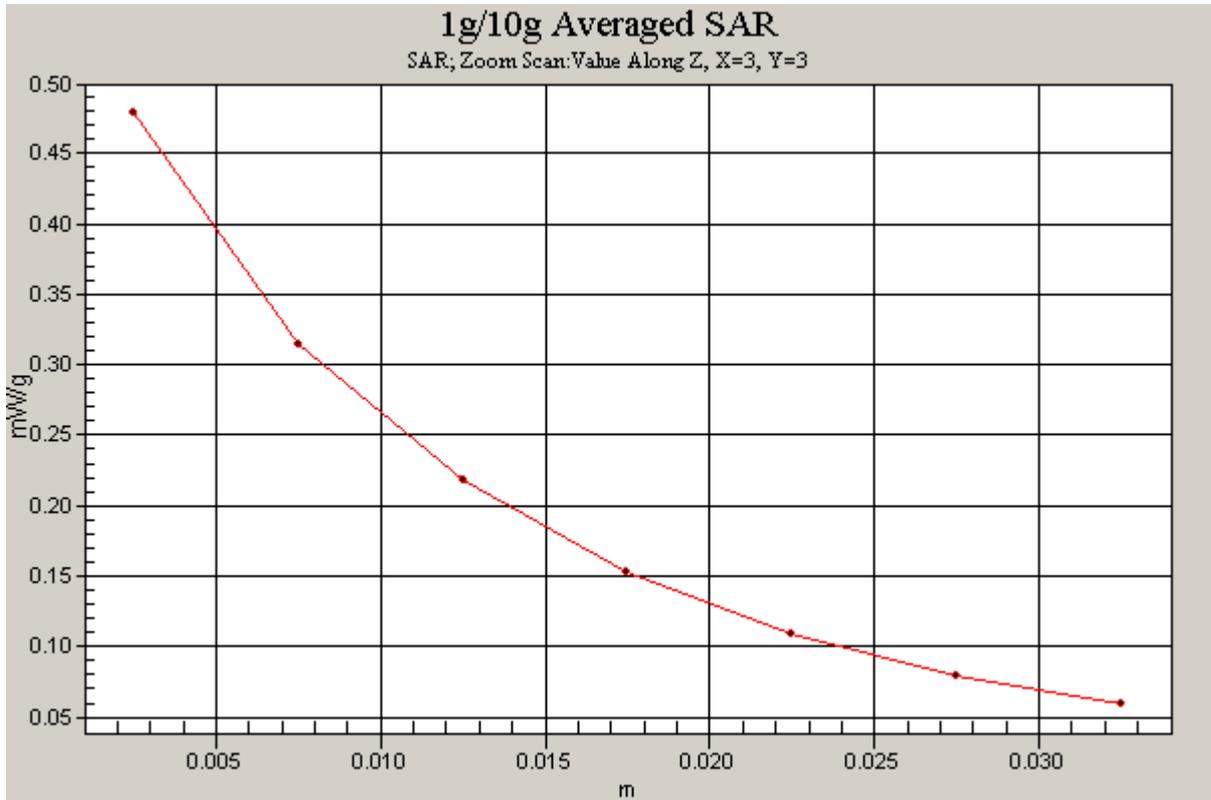


Figure 22 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 192]

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Low Frequency

Date/Time: 5/21/2009 1:41:46 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.986$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.448 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.106 dB

Peak SAR (extrapolated) = 0.555 W/kg

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.448 mW/g

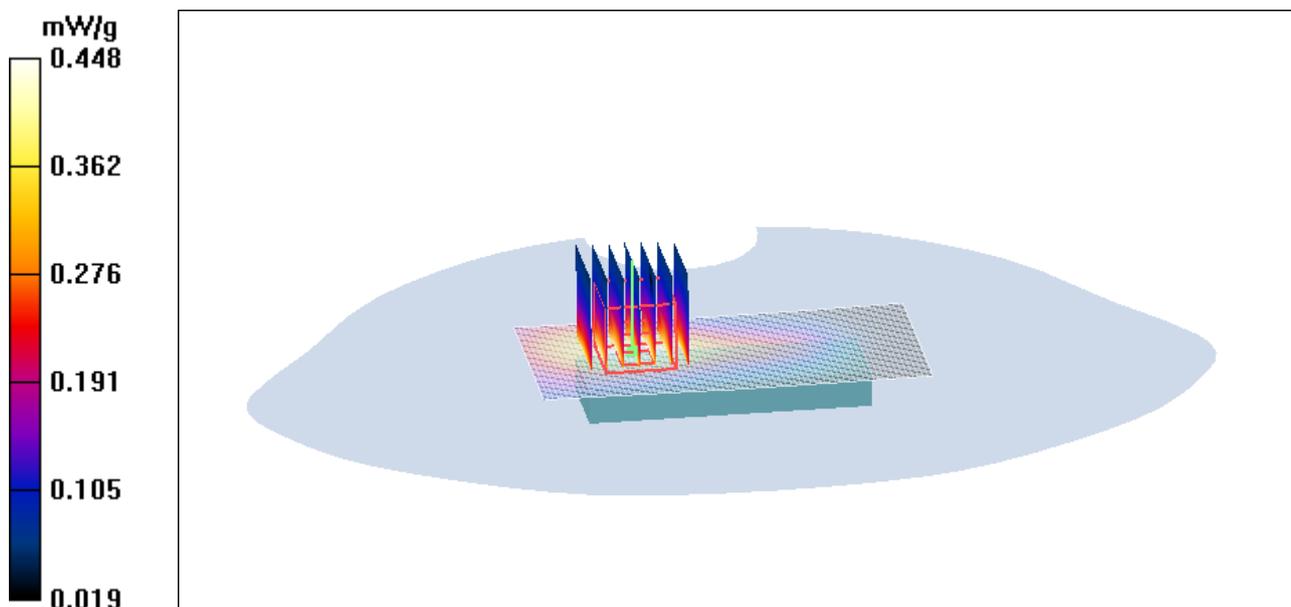


Figure 23 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 128

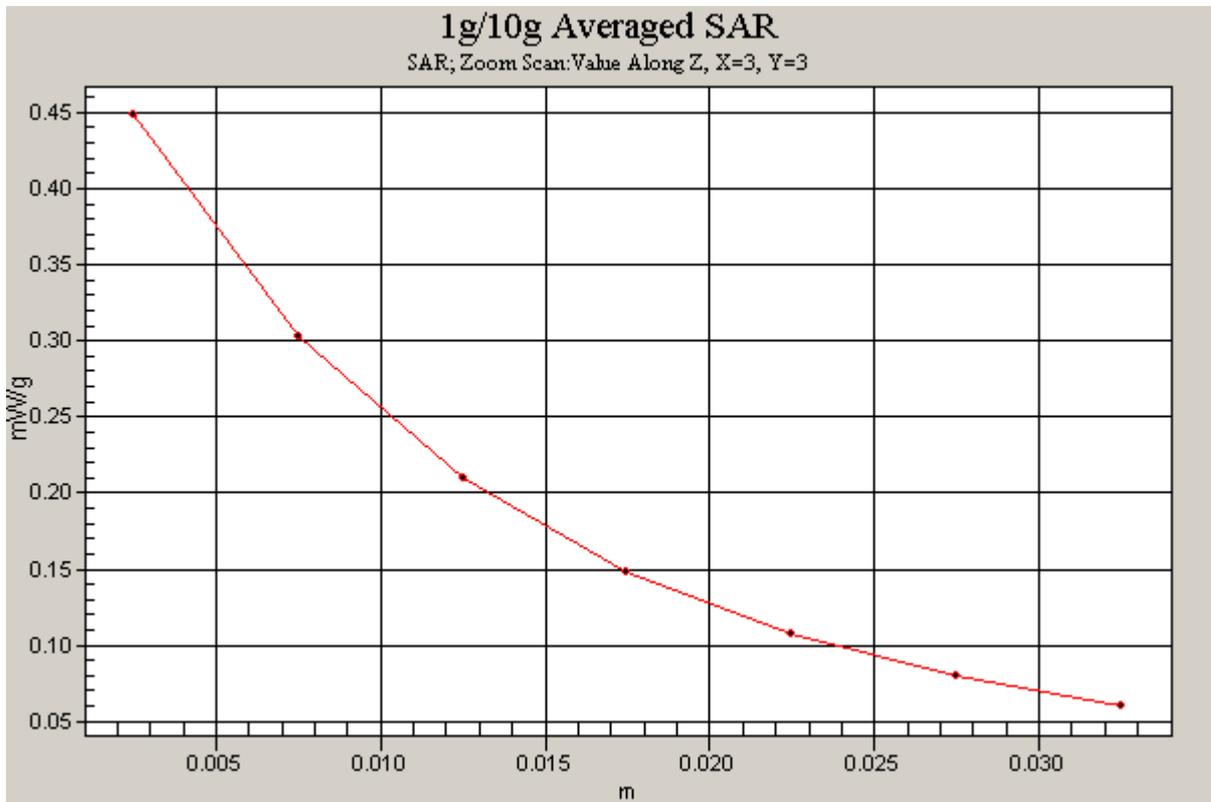


Figure 24 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1Channel 128]

GSM 850 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 5/21/2009 4:55:19 AM

Communication System: GSM850 + GPRS(1Up); Frequency: 837 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 837$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.388 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.396 mW/g

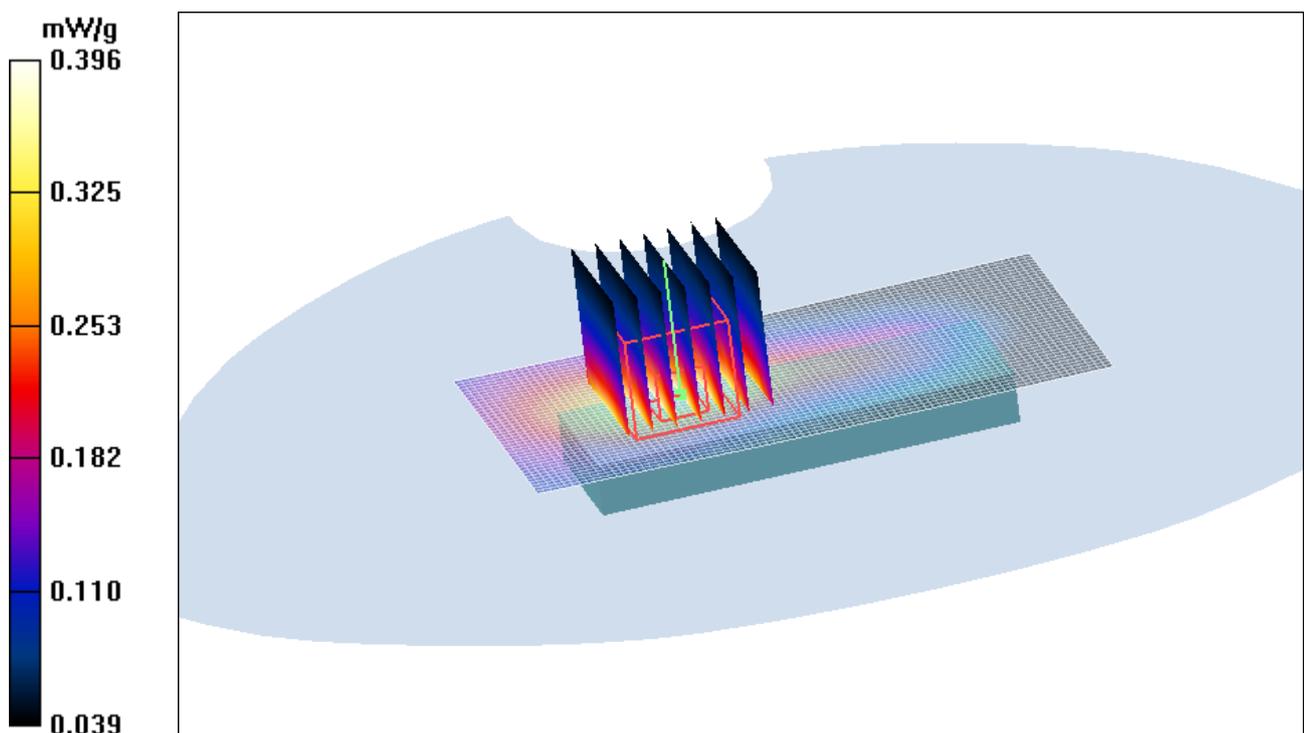


Figure 25 GSM 850 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1Channel 192

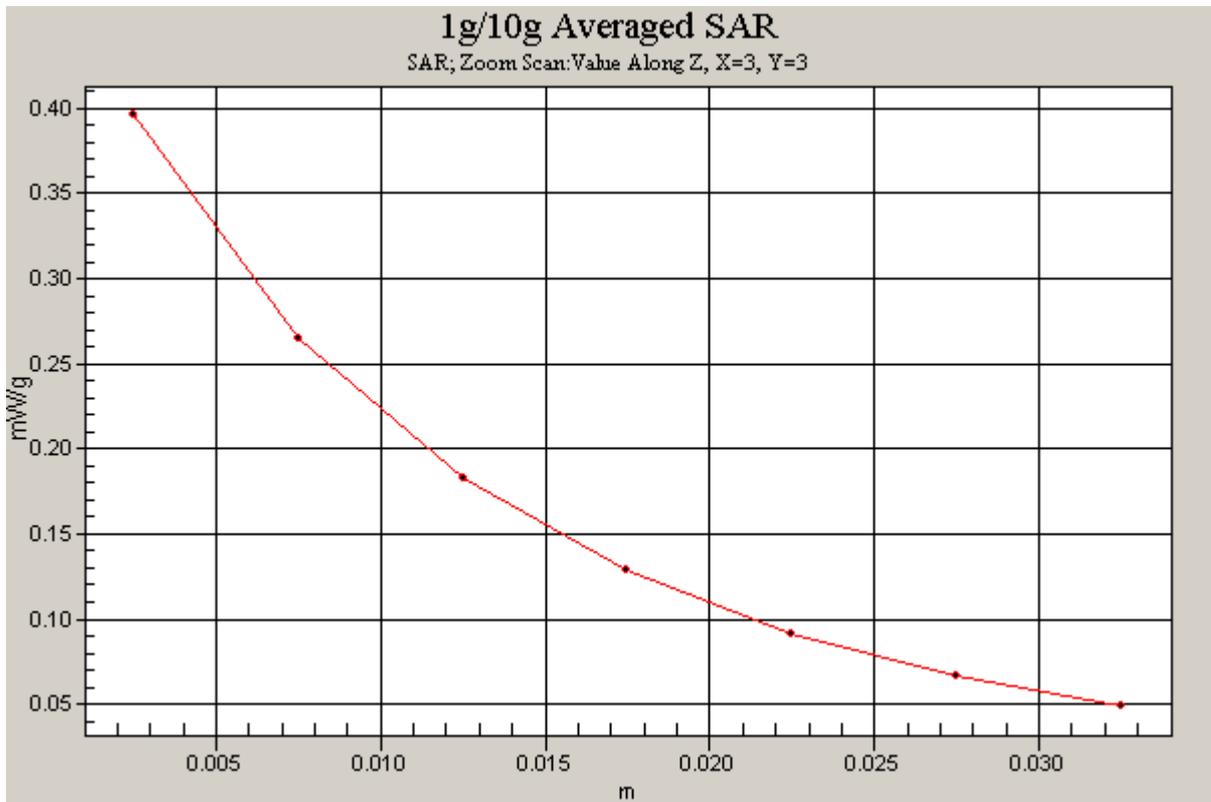


Figure 26 Z-Scan at power reference point [GSM 850 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1Channel 192]

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Middle Frequency

Date/Time: 5/21/2009 6:34:58 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.436 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.8 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.511 W/kg

SAR(1 g) = 0.342 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.412 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.8 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.167 mW/g

Maximum value of SAR (measured) = 0.332 mW/g

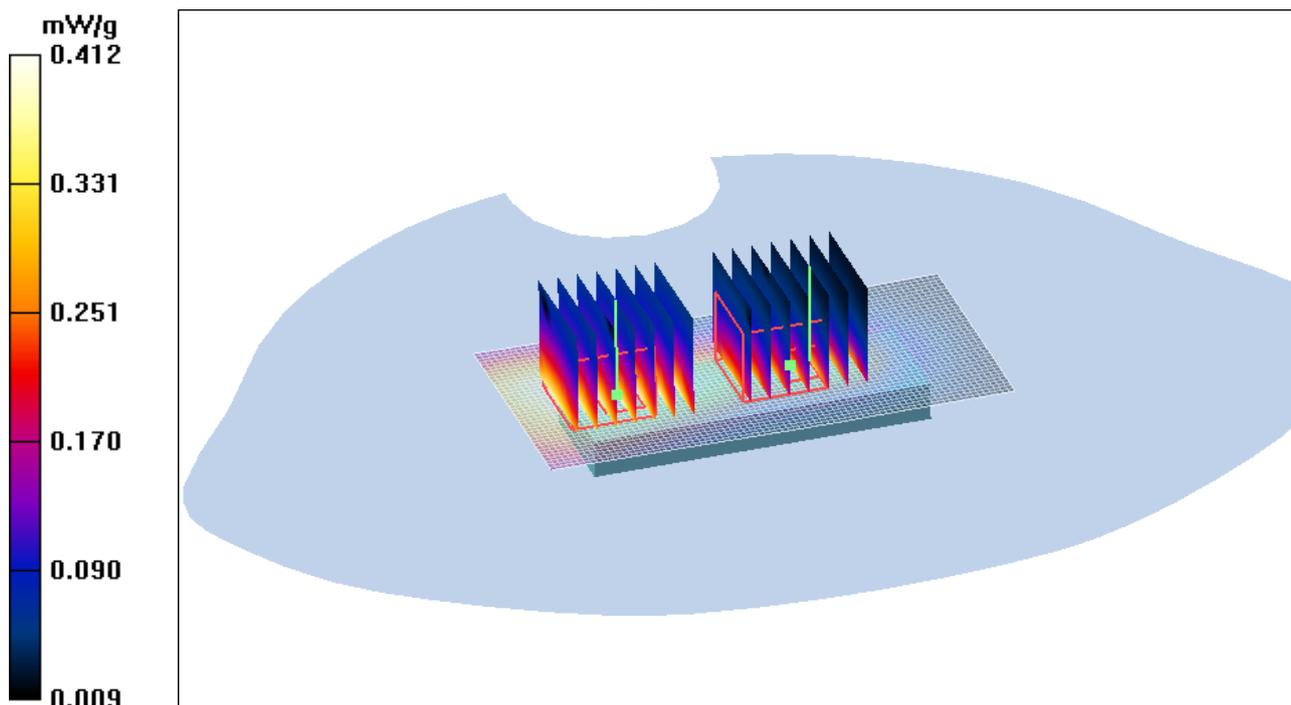


Figure 27 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 192

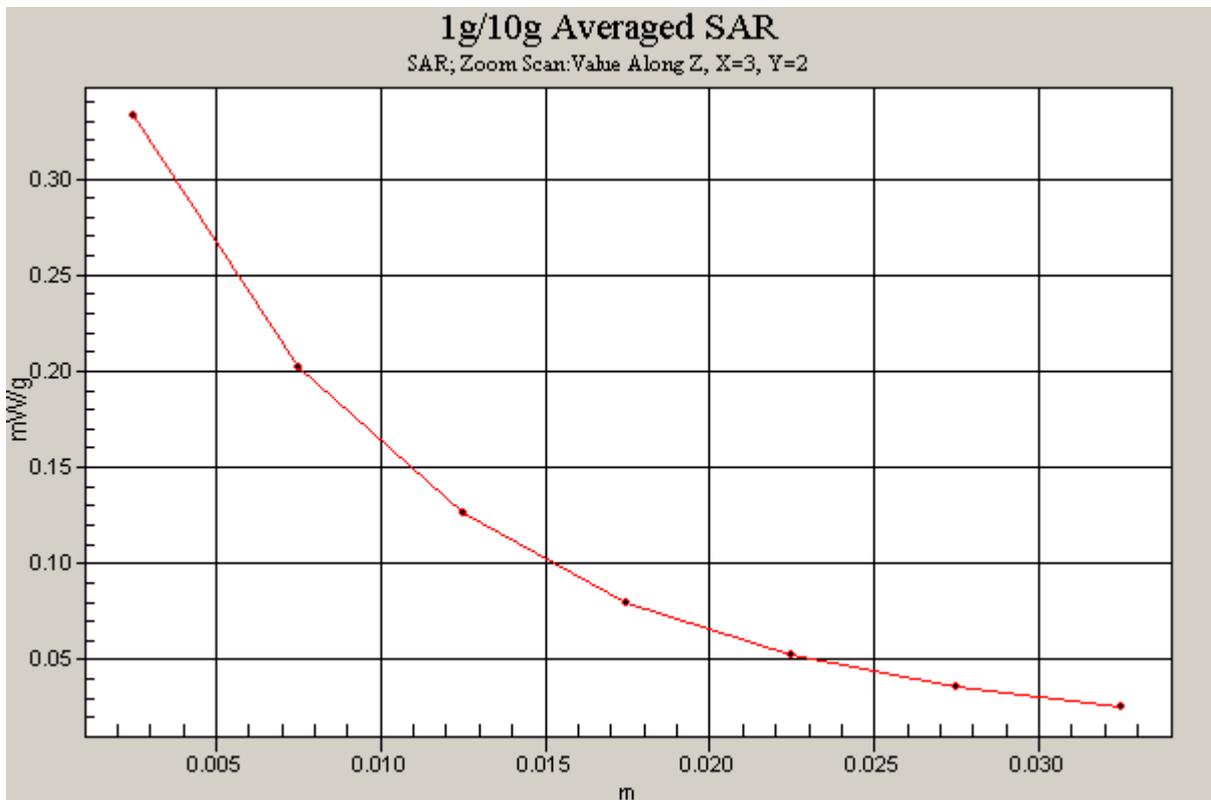
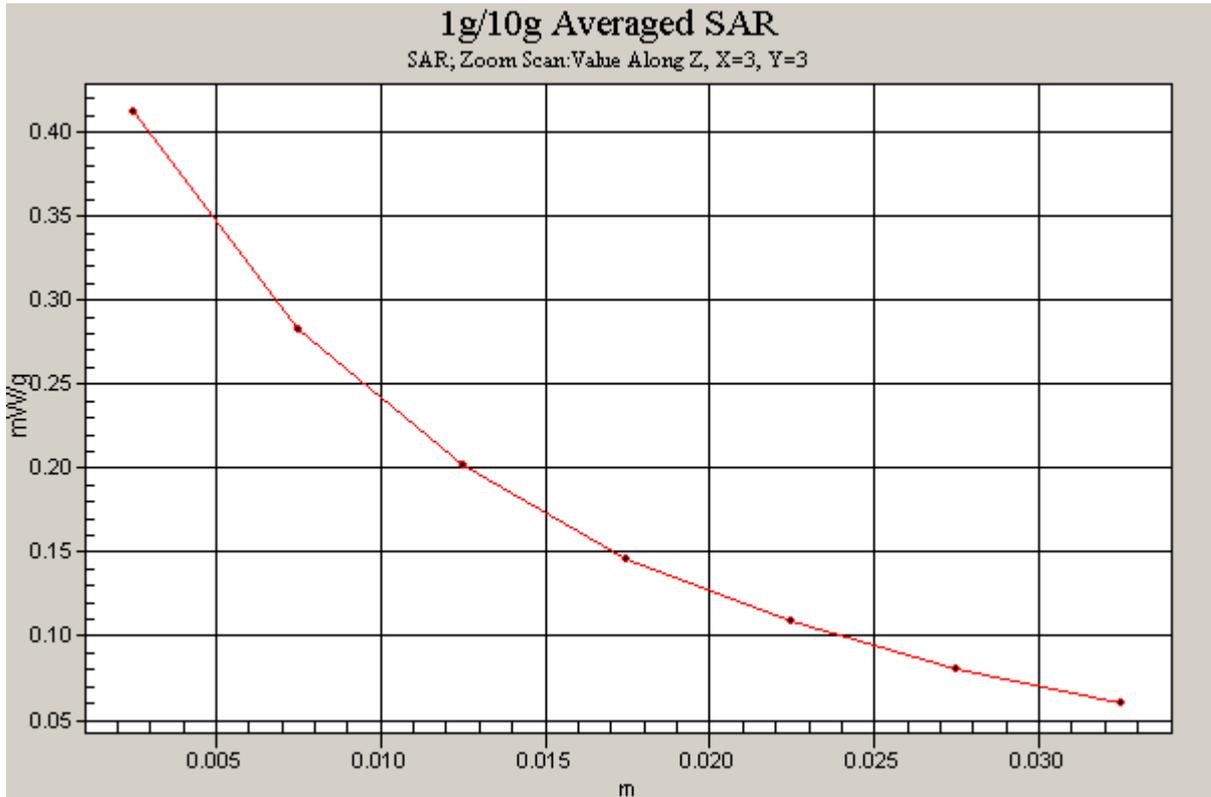


Figure 28 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 192]

GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Middle Frequency

Date/Time: 5/21/2009 7:04:08 AM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (41x41x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.277 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.056 mW/g

Maximum value of SAR (measured) = 0.263 mW/g

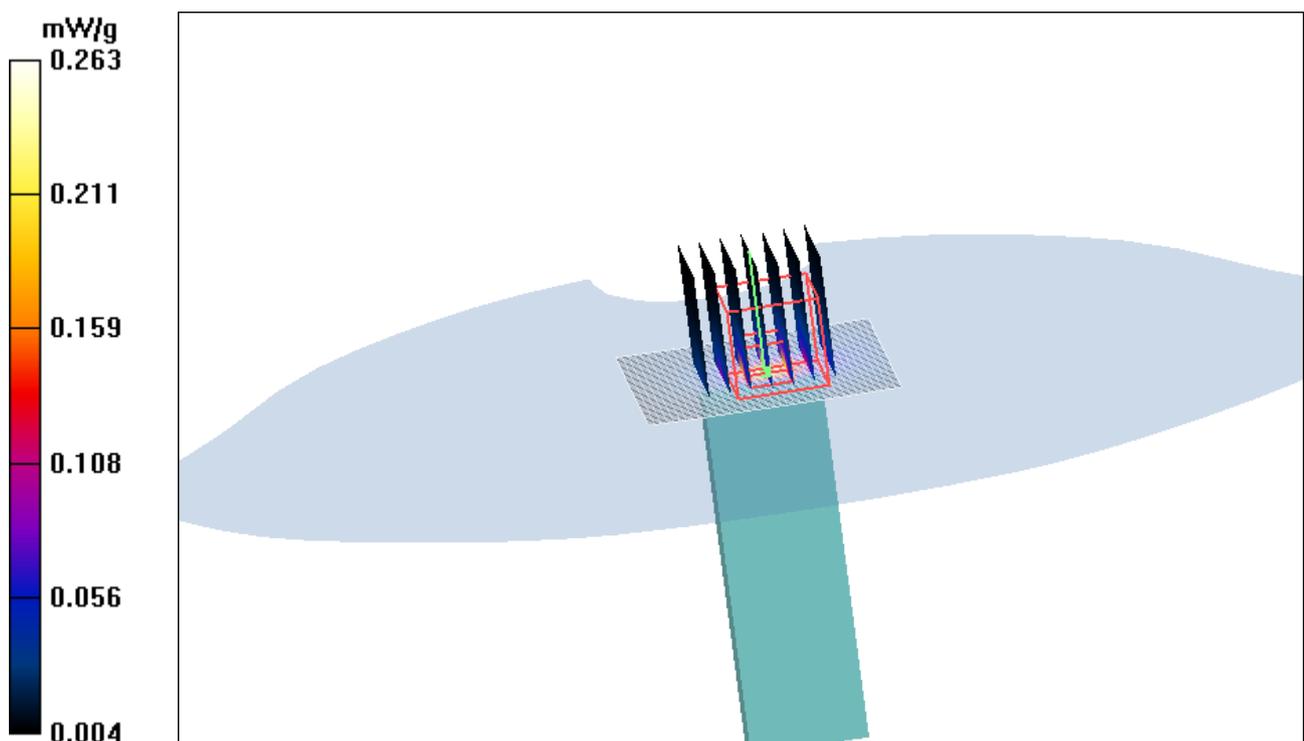


Figure 29 GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 192

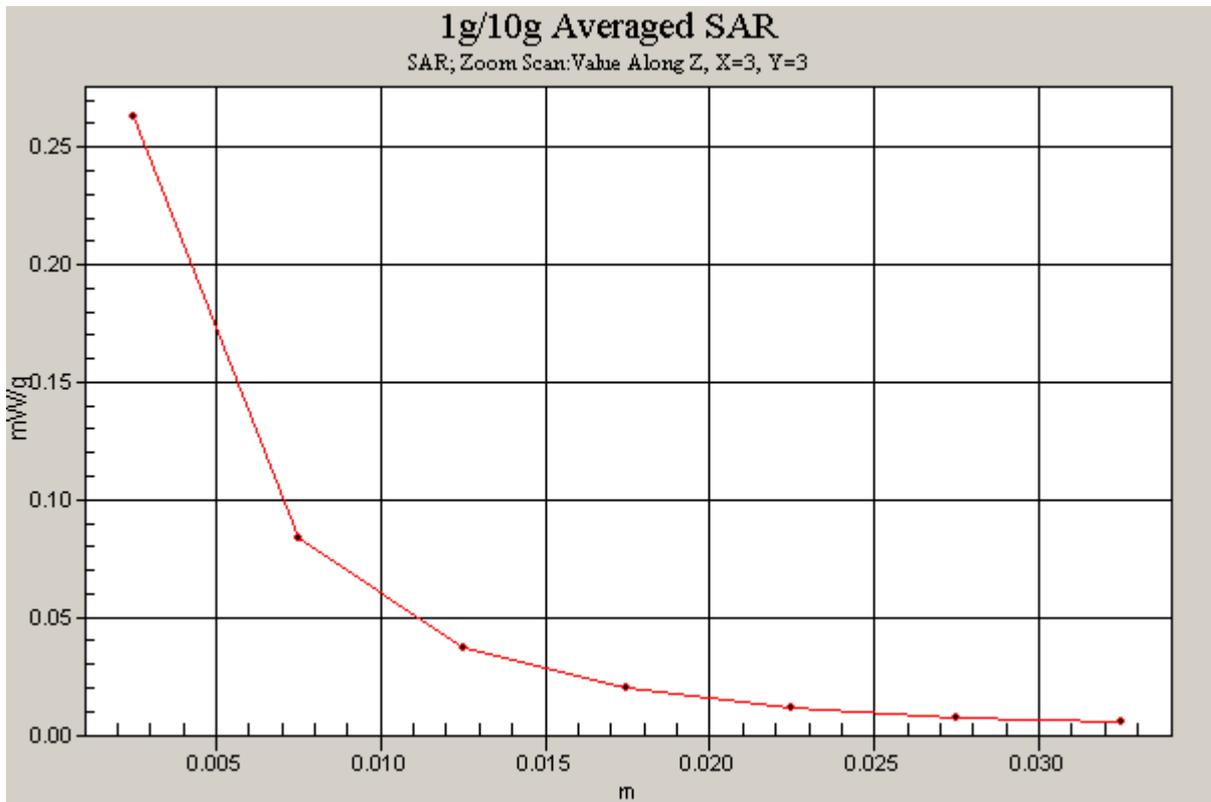


Figure 30 Z-Scan at power reference point [GSM 850 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 192]

GSM 850 GPRS (2 timeslot in uplink) with IBM T61 Test Position 4 Middle Frequency

Date/Time: 5/21/2009 12:25:56 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.316 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.192 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.318 mW/g

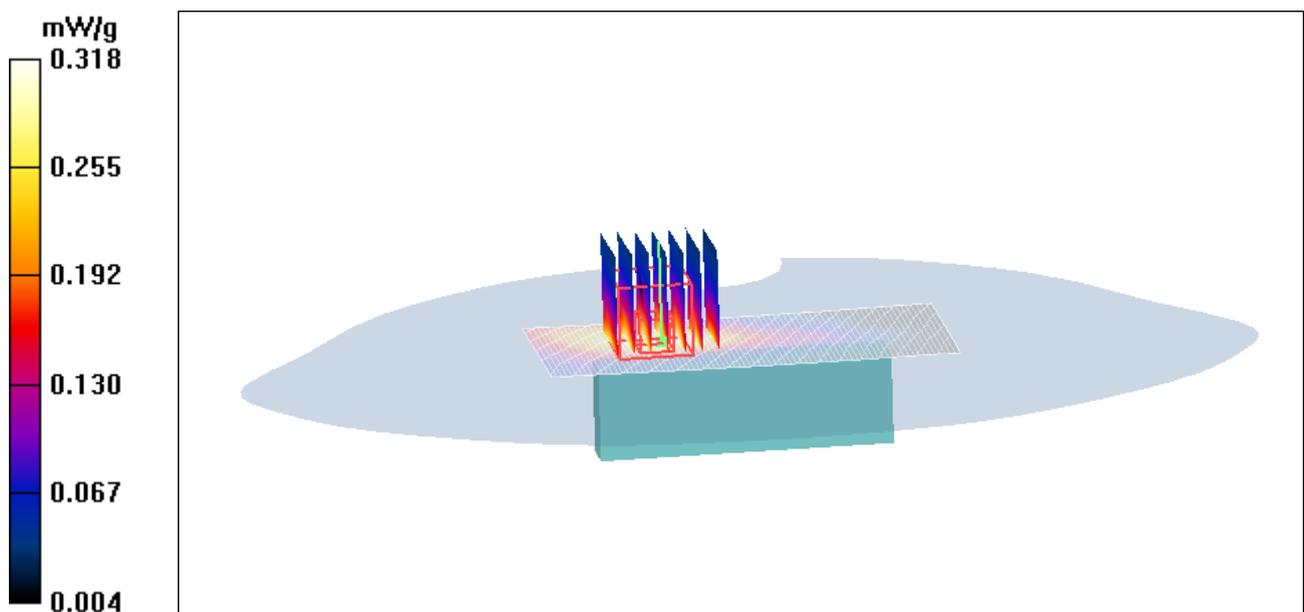


Figure 31 GSM 850 GPRS (2 timeslot in uplink) with IBM T61 Test Position 4 Channel 192

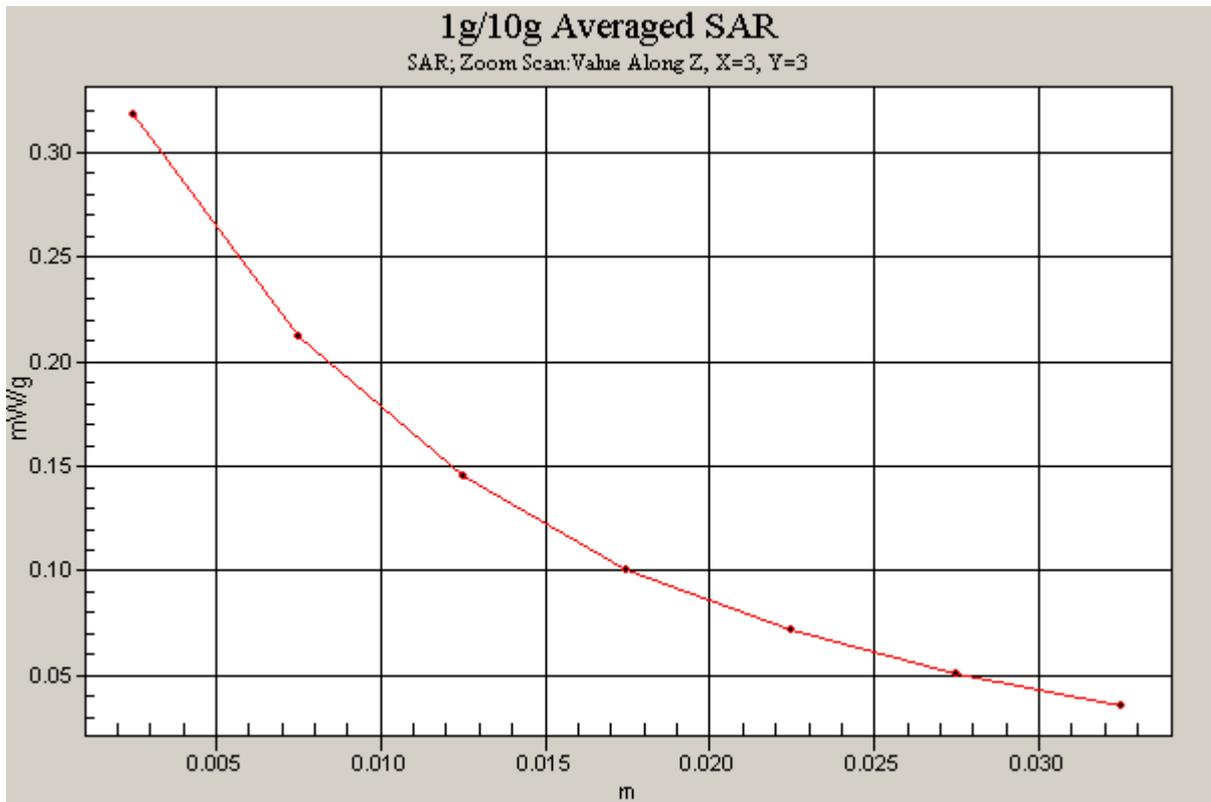


Figure 32 Z-Scan at power reference point [GSM 850 GPRS (2 timeslot in uplink) with IBM T61
Test Position 4Channel 192]

GSM 850 GPRS (2 timeslot in uplink) with IBM T61 Test Position 5 Middle Frequency

Date/Time: 5/21/2009 12:05:06 PM

Communication System: GSM850 + GPRS(2Up); Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 837$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.425 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.536 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.216 mW/g

Maximum value of SAR (measured) = 0.422 mW/g

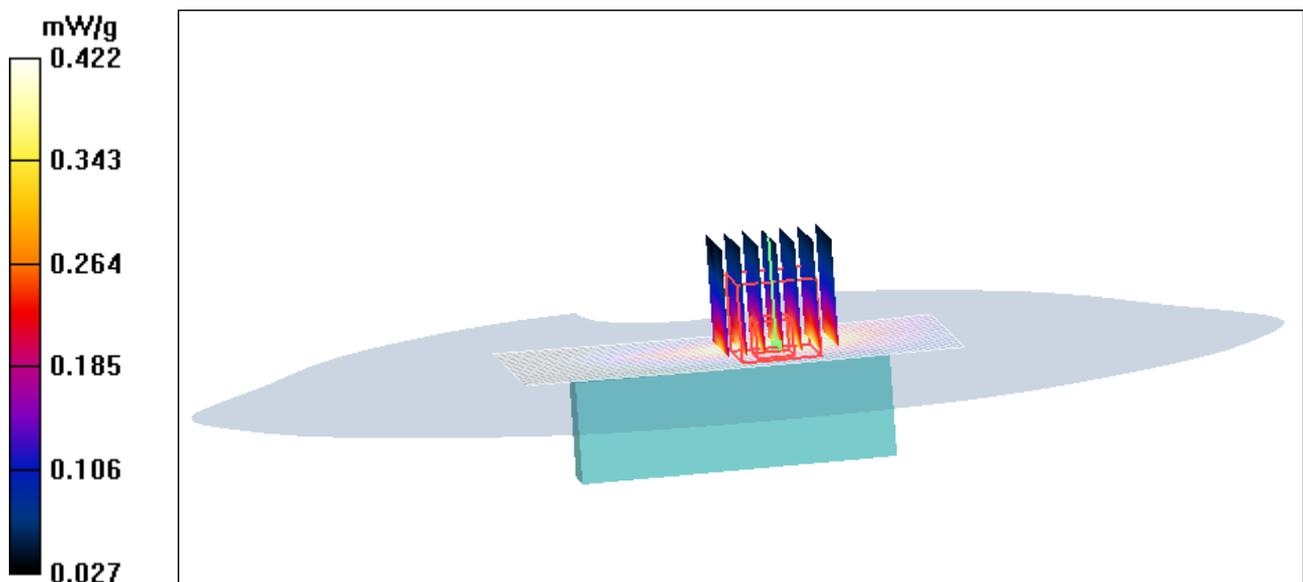


Figure 33 GSM 850 GPRS (2 timeslot in uplink) with IBM T61 Test Position 5 Channel 192

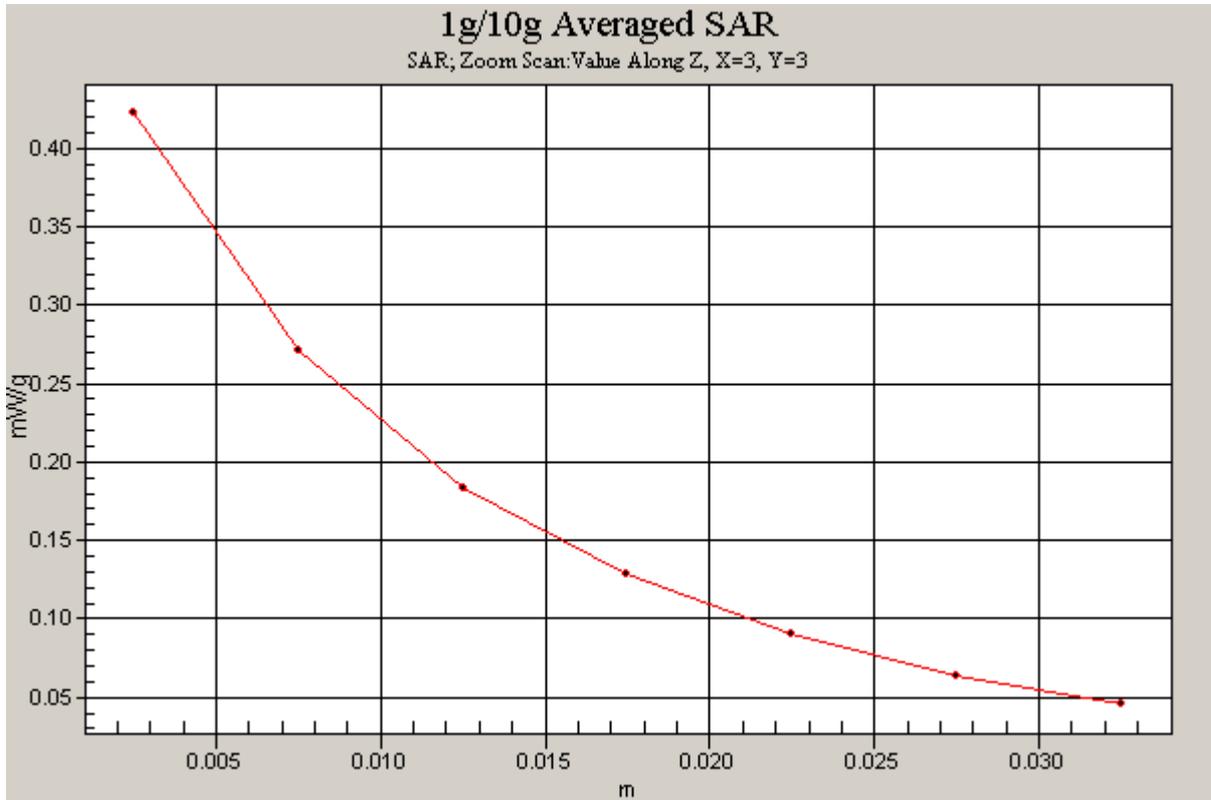


Figure 34 Z-Scan at power reference point [GSM 850 GPRS (2 timeslot in uplink) with IBM T61
Test Position 5 Channel 192]

GSM 850 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 High Frequency

Date/Time: 5/21/2009 2:01:32 PM

Communication System: GSM850 + EGPRS(2Up); Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 849$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.491 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.9 V/m; Power Drift = 0.057 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.411 mW/g; SAR(10 g) = 0.267 mW/g

Maximum value of SAR (measured) = 0.500 mW/g

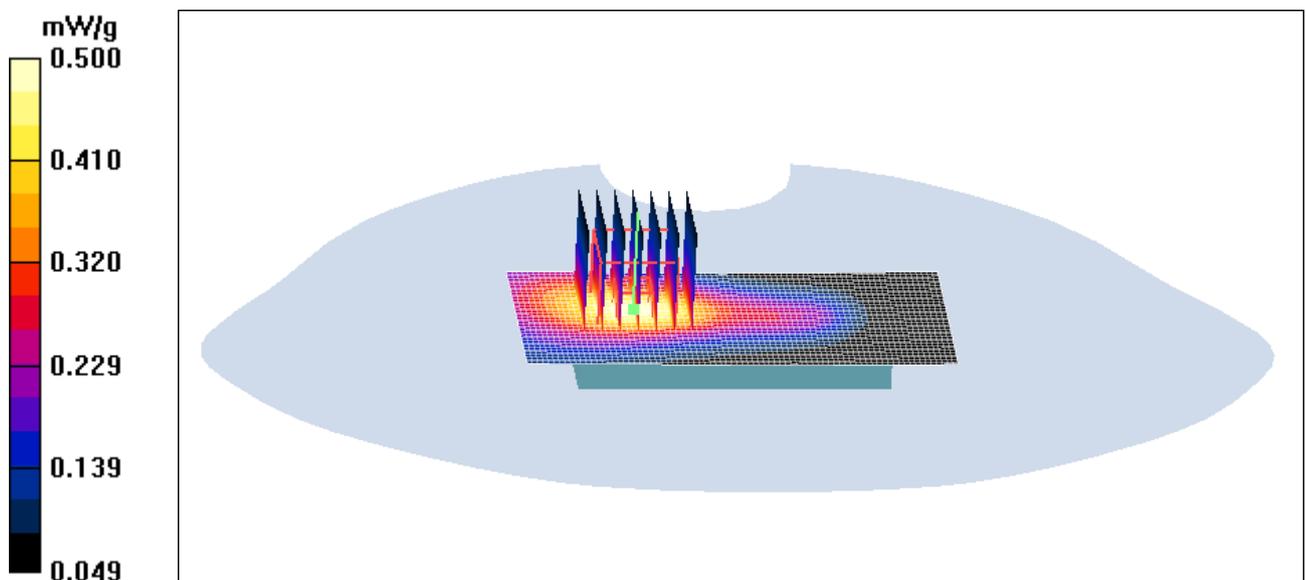


Figure 35 GSM 850 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 251

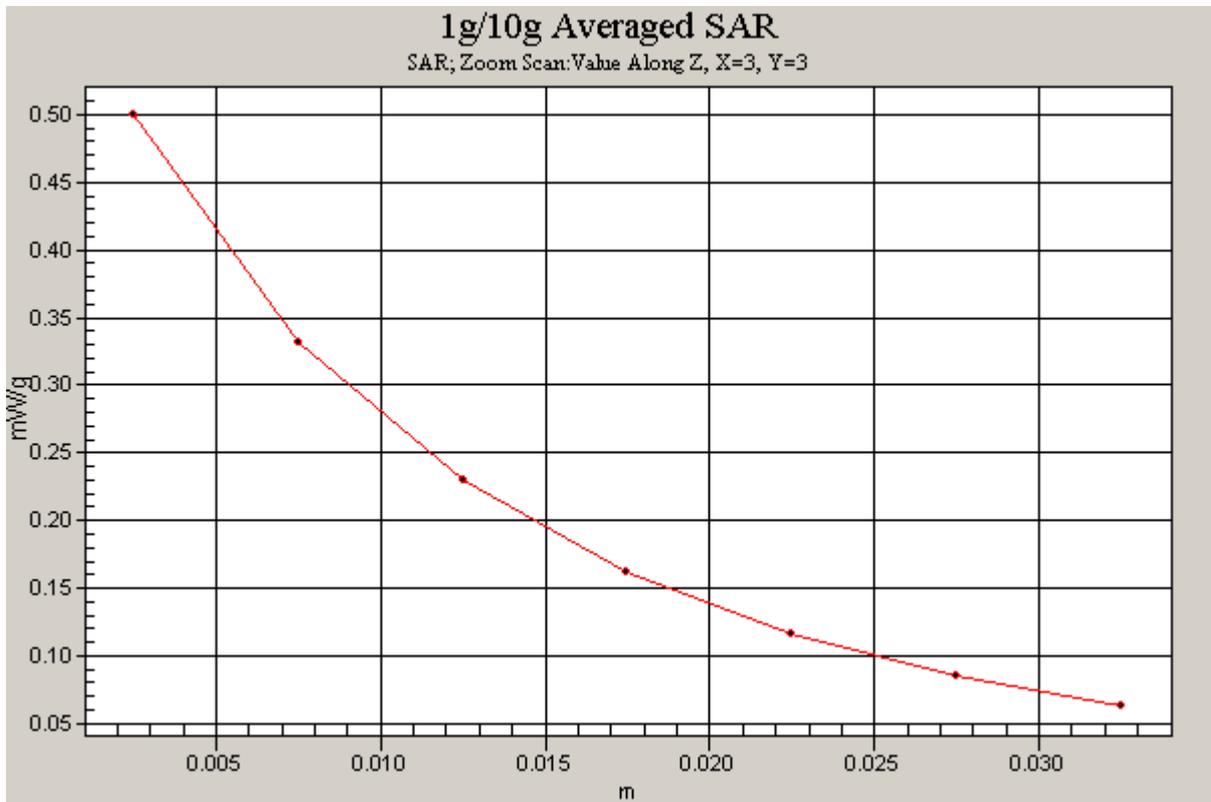


Figure 36 Z-Scan at power reference point [GSM 850 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 251]

GSM 1900 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 5/23/2009 1:26:20 AM

Communication System: PCS 1900+GPRS(4Up); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle 2/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.442 mW/g

Test Position 1 Middle 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.152 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.384 mW/g

Test Position 1 Middle 2/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = 0.152 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.234 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.305 mW/g

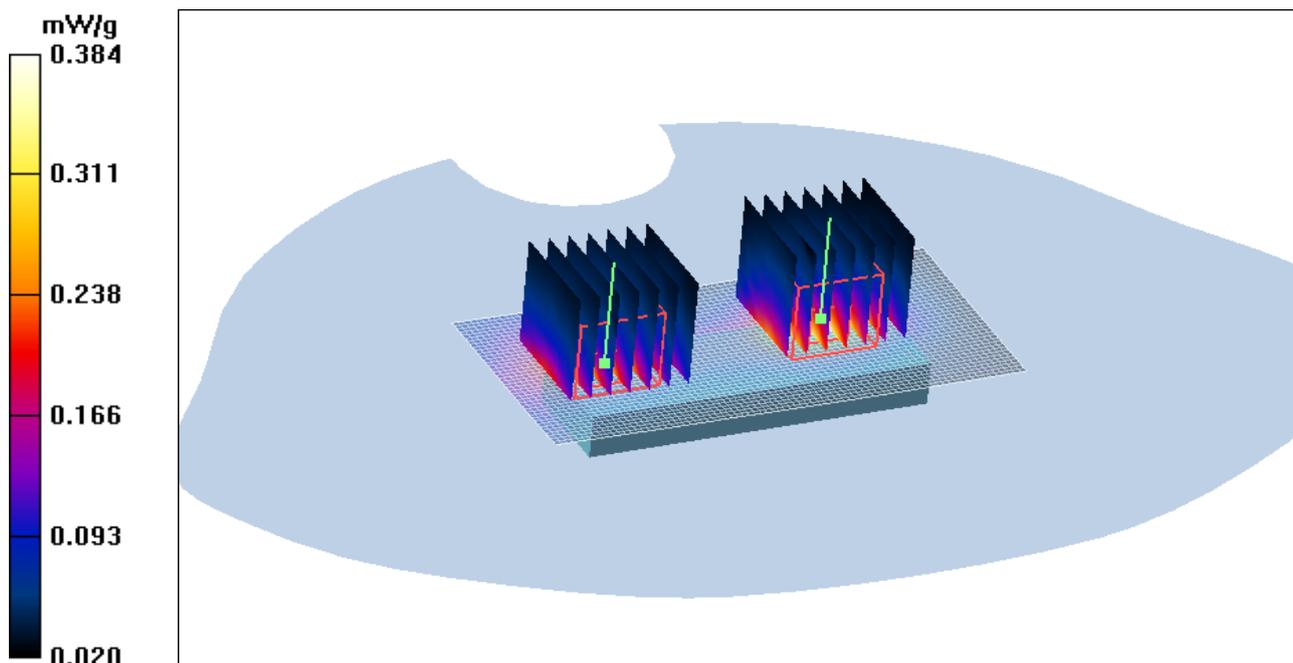


Figure 37 GSM 1900 GPRS (4 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 661

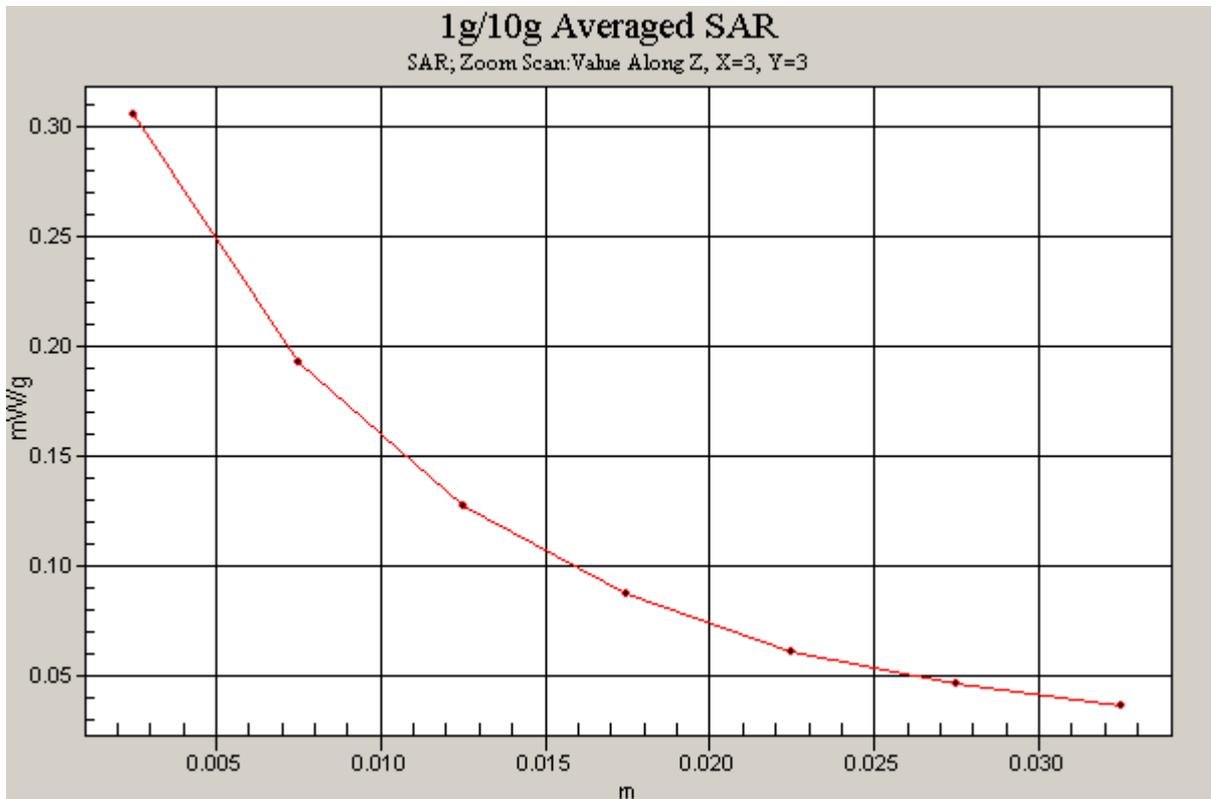
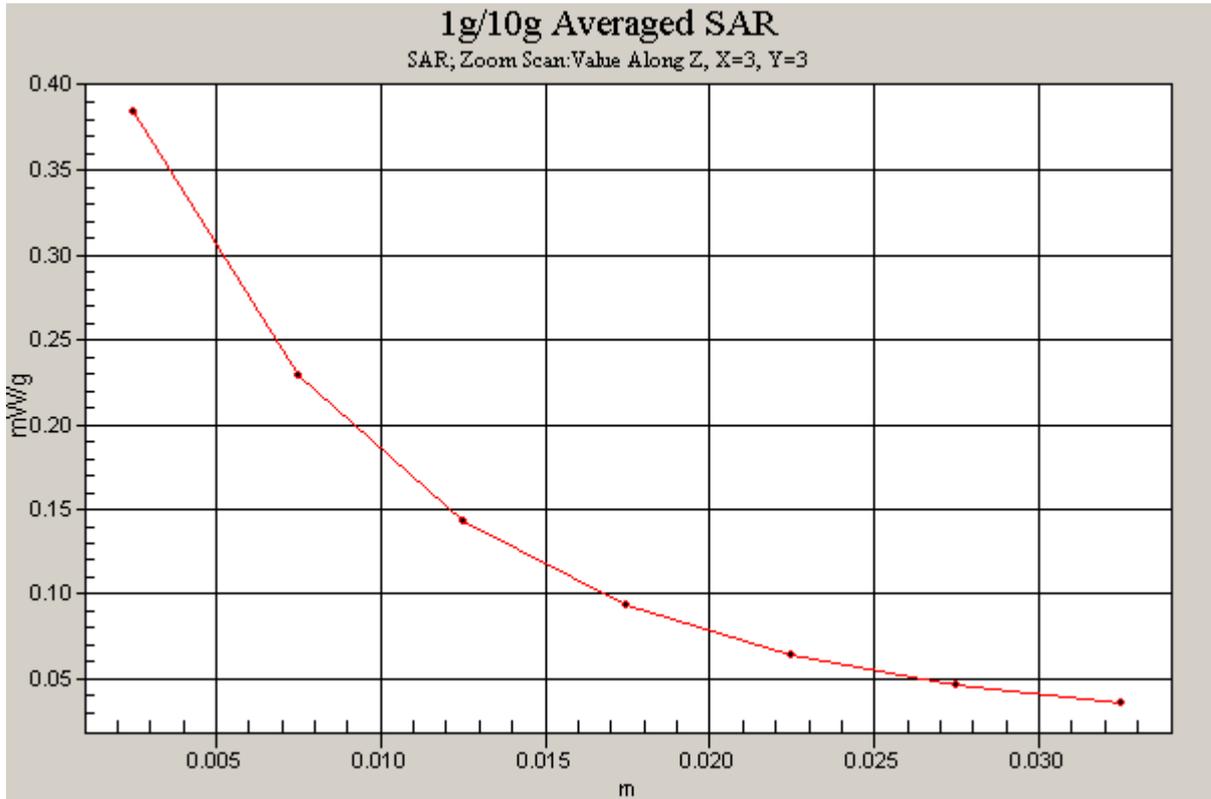


Figure 38 Z-Scan at power reference point [GSM 1900 GPRS (4 timeslots in uplink) with I BenQ Joybook R55V Test Position 1 Channel 661]

GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 5/23/2009 2:53:38 AM

Communication System: PCS 1900+GPRS(3Up); Frequency: 1880 MHz; Duty Cycle: 1:2.67

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.642 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.3 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.578 mW/g

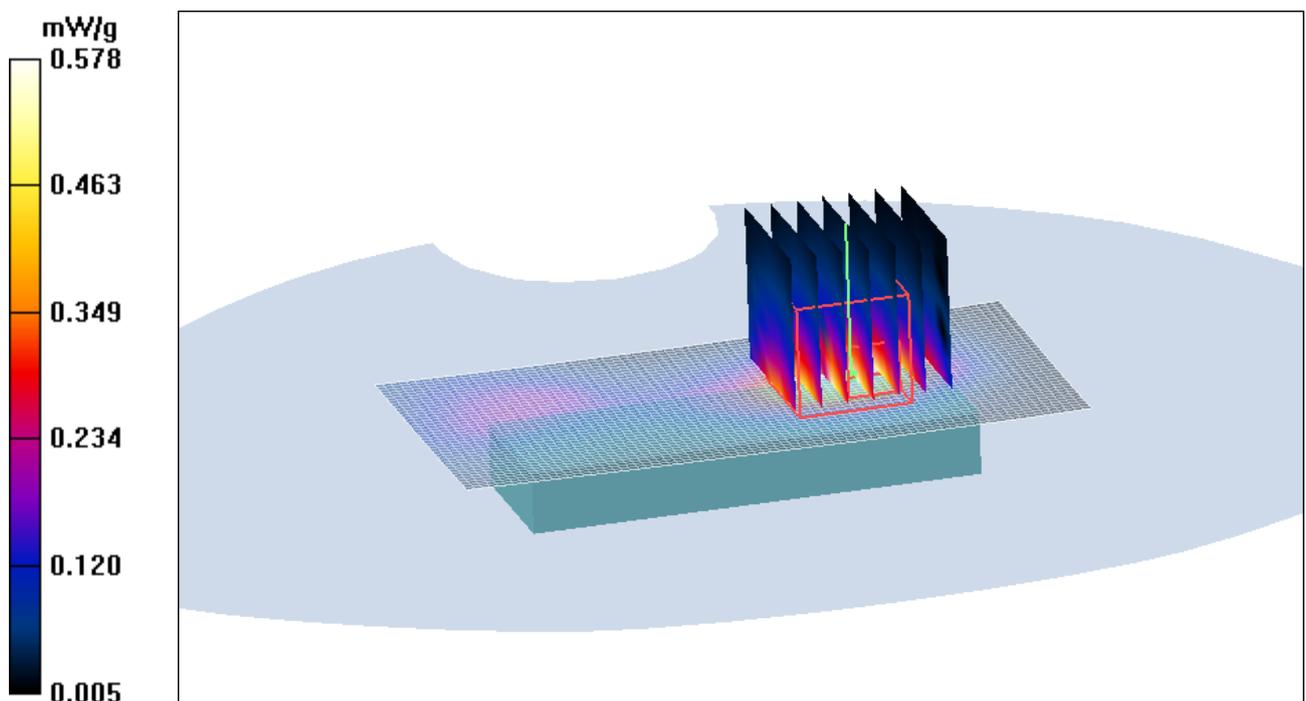


Figure 39 GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 661

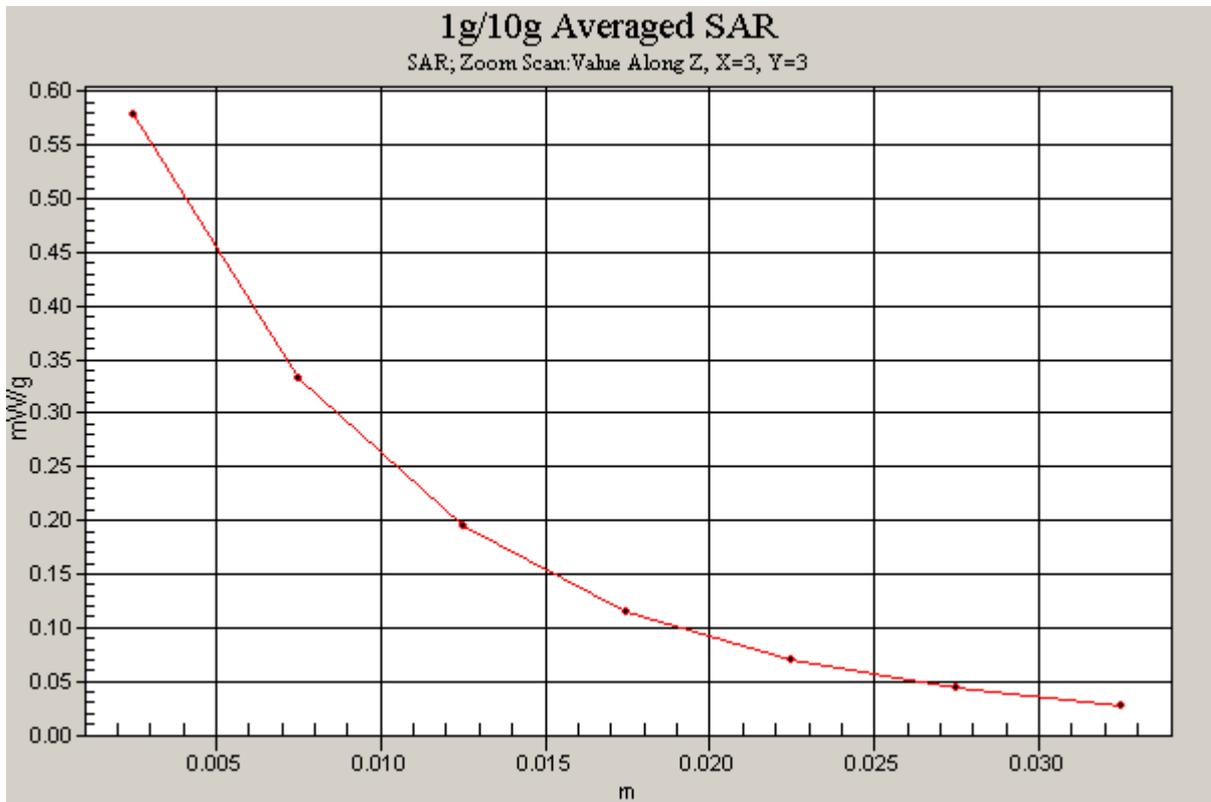


Figure 40 Z-Scan at power reference point [GSM 1900 GPRS (3 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 661]

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 5/23/2009 3:11:59 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.845 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.6 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.255 mW/g

Maximum value of SAR (measured) = 0.619 mW/g

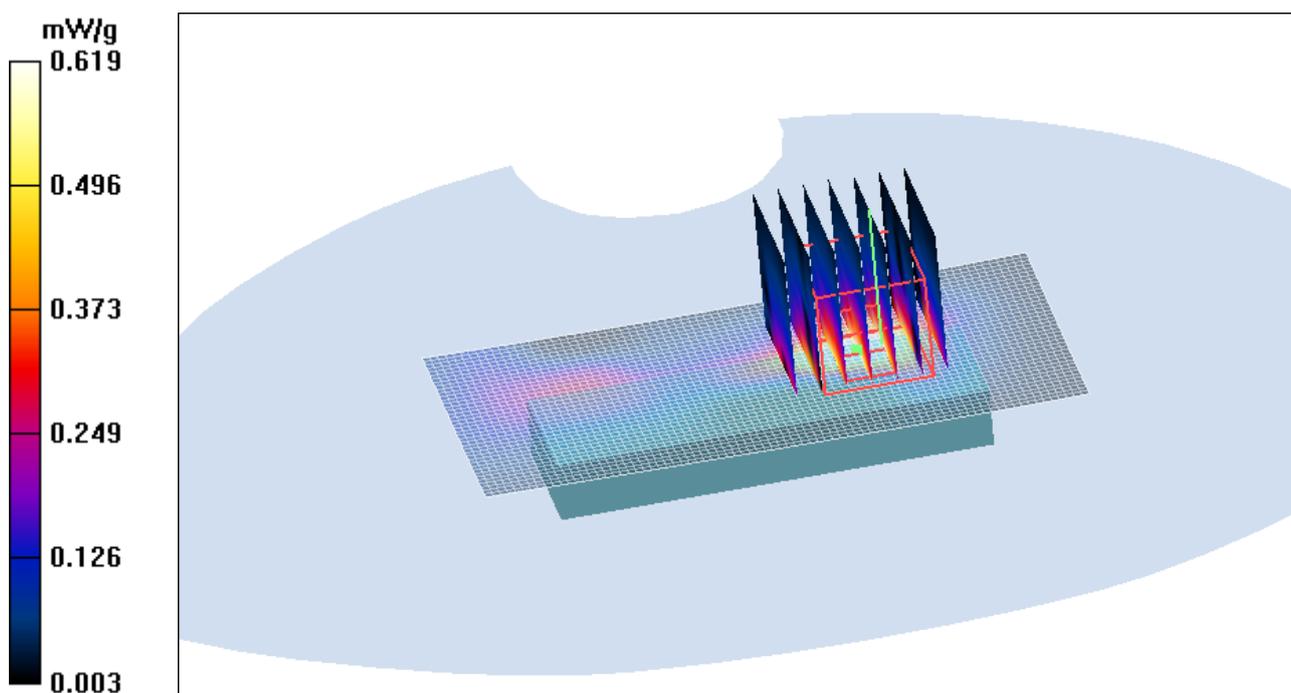


Figure 41 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 661

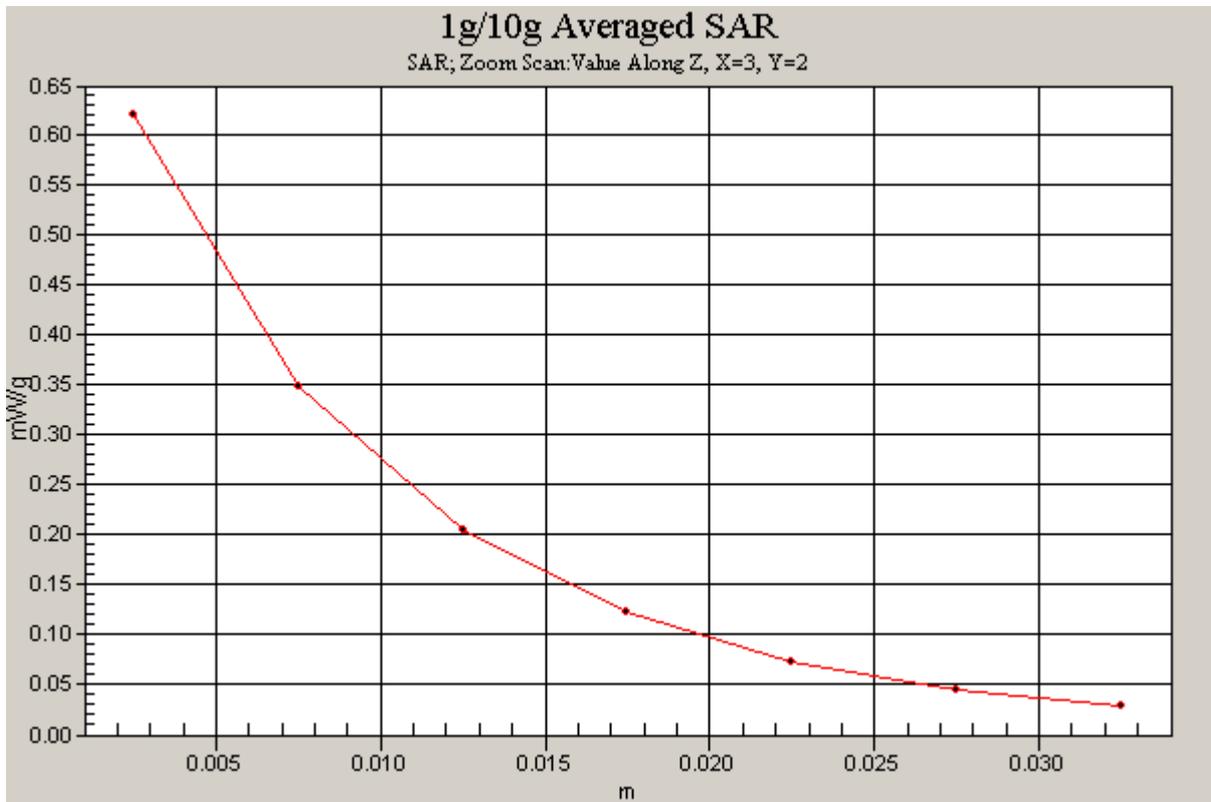


Figure 42 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 1 Channel 661]

GSM 1900 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 5/23/2009 3:37:49 AM

Communication System: PCS 1900+GPRS(1Up); Frequency: 1880 MHz; Duty Cycle: 1:8

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.652 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.58 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 0.723 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.221 mW/g

Maximum value of SAR (measured) = 0.539 mW/g

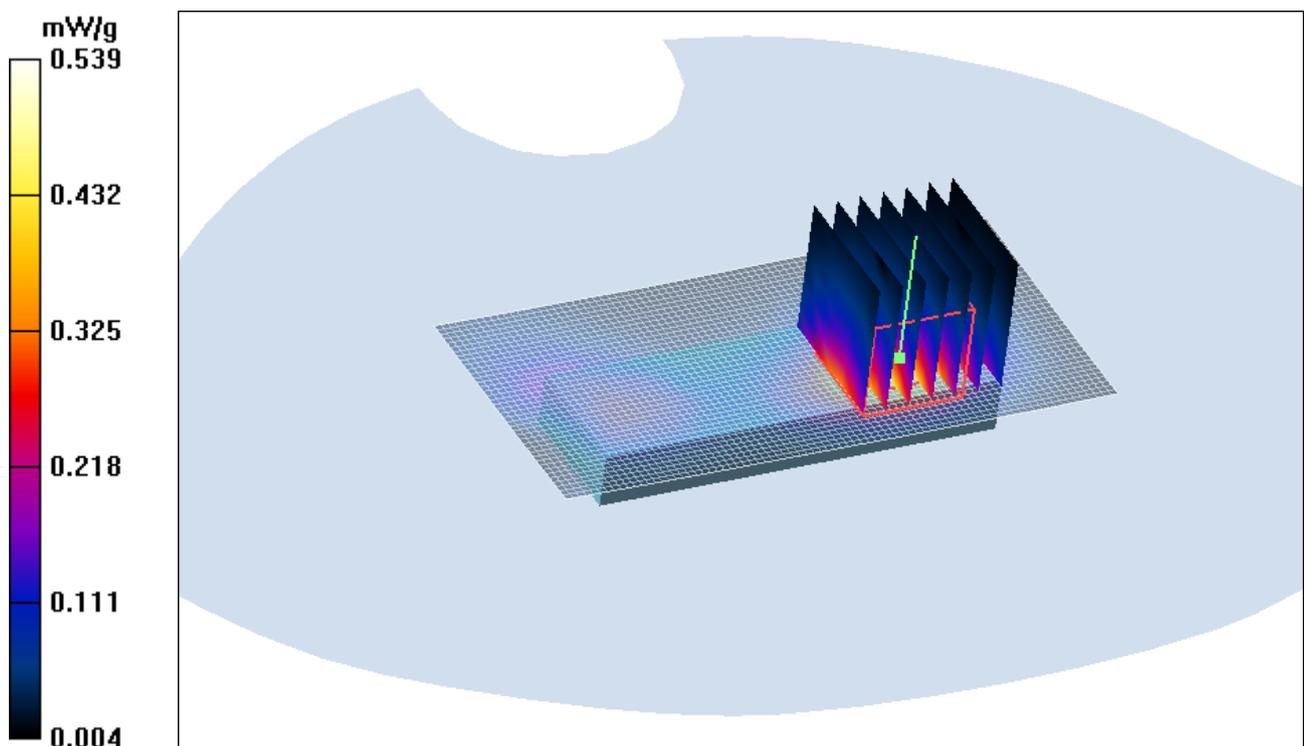


Figure 43 GSM 1900 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1 Channel 661

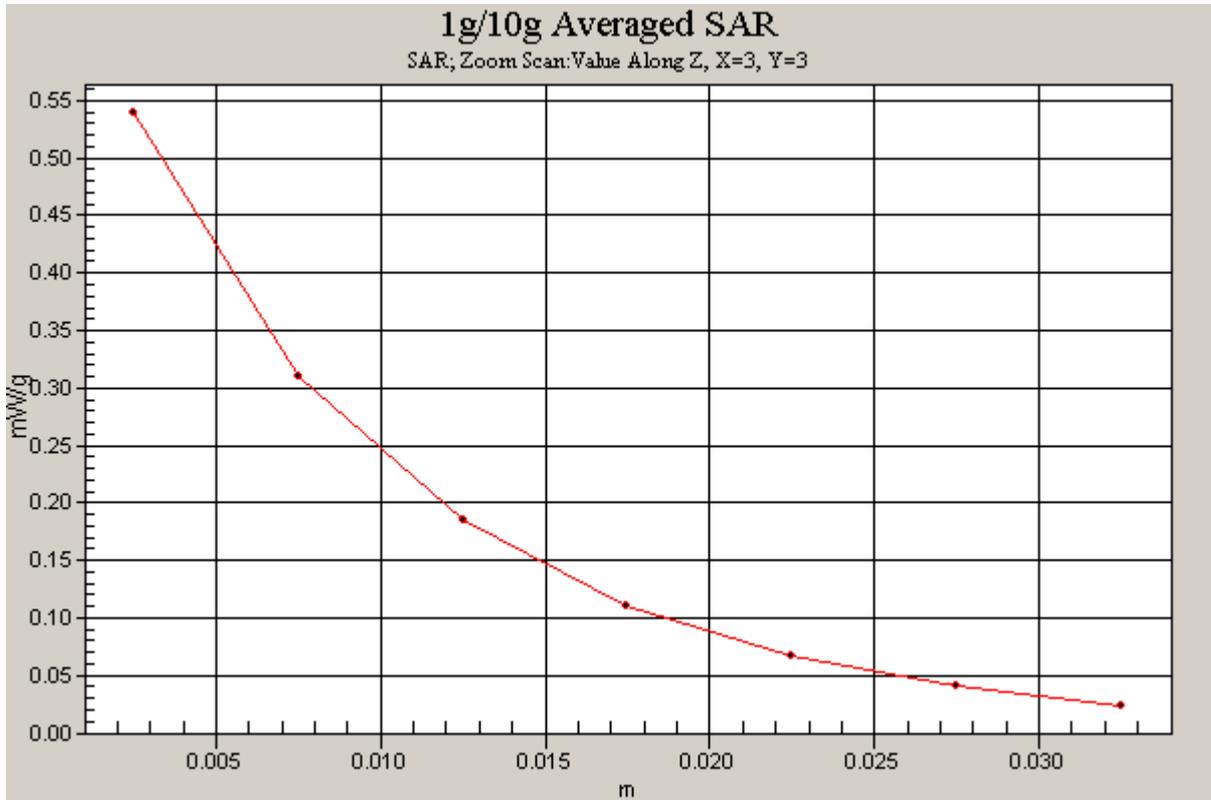


Figure 44 Z-Scan at power reference point [GSM 1900 GPRS (1 timeslot in uplink) with BenQ Joybook R55V Test Position 1 Channel 661]

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 High Frequency

Date/Time: 5/23/2009 9:50:44 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.765 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.5 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 0.967 W/kg

SAR(1 g) = 0.458 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.643 mW/g

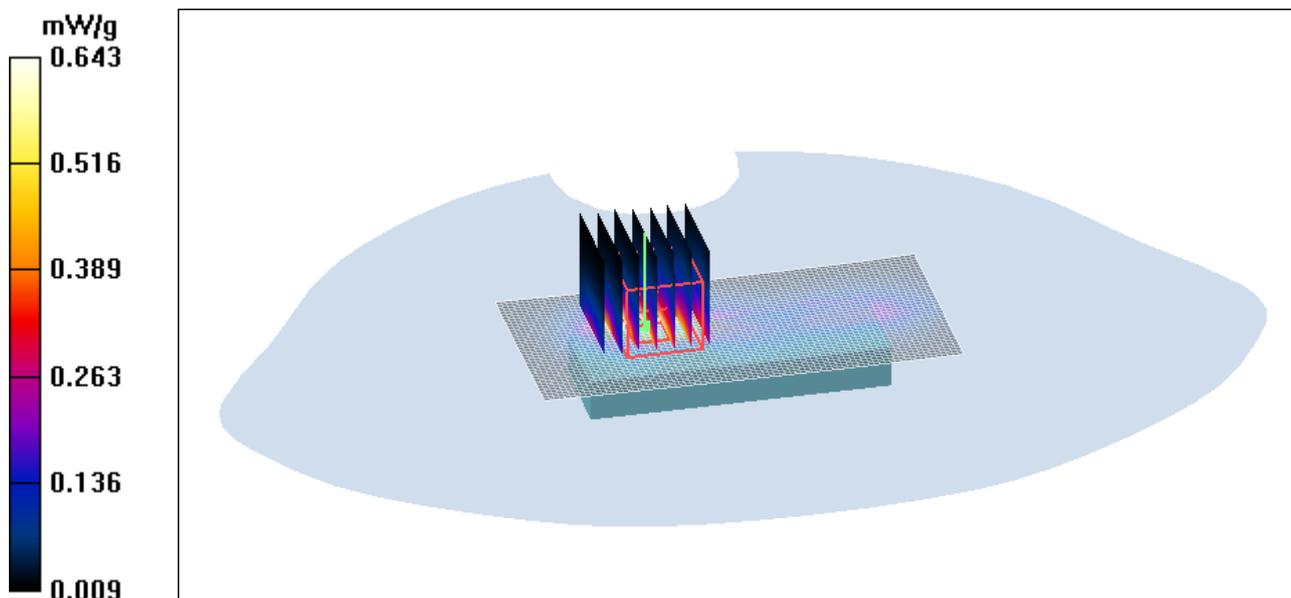


Figure 45 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 810



Figure 46 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with I BenQ Joybook R55V Test Position 2 Channel 810]

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Middle Frequency

Date/Time: 5/23/2009 9:33:26 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liqjud Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.869 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.764 mW/g

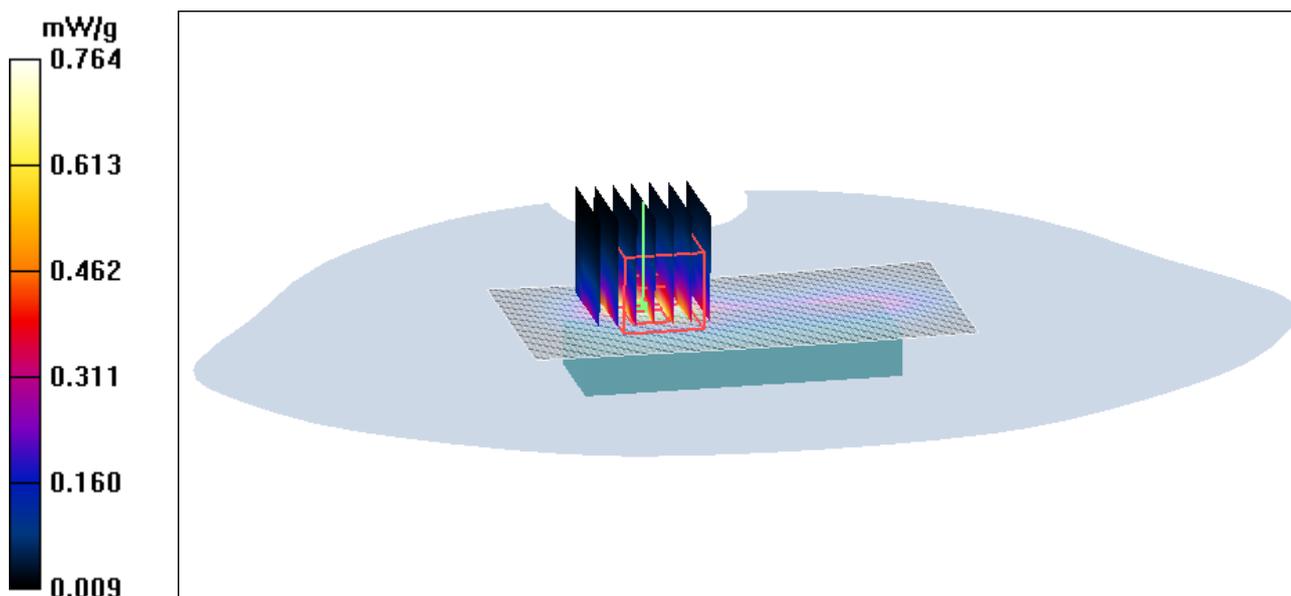


Figure 47 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 661

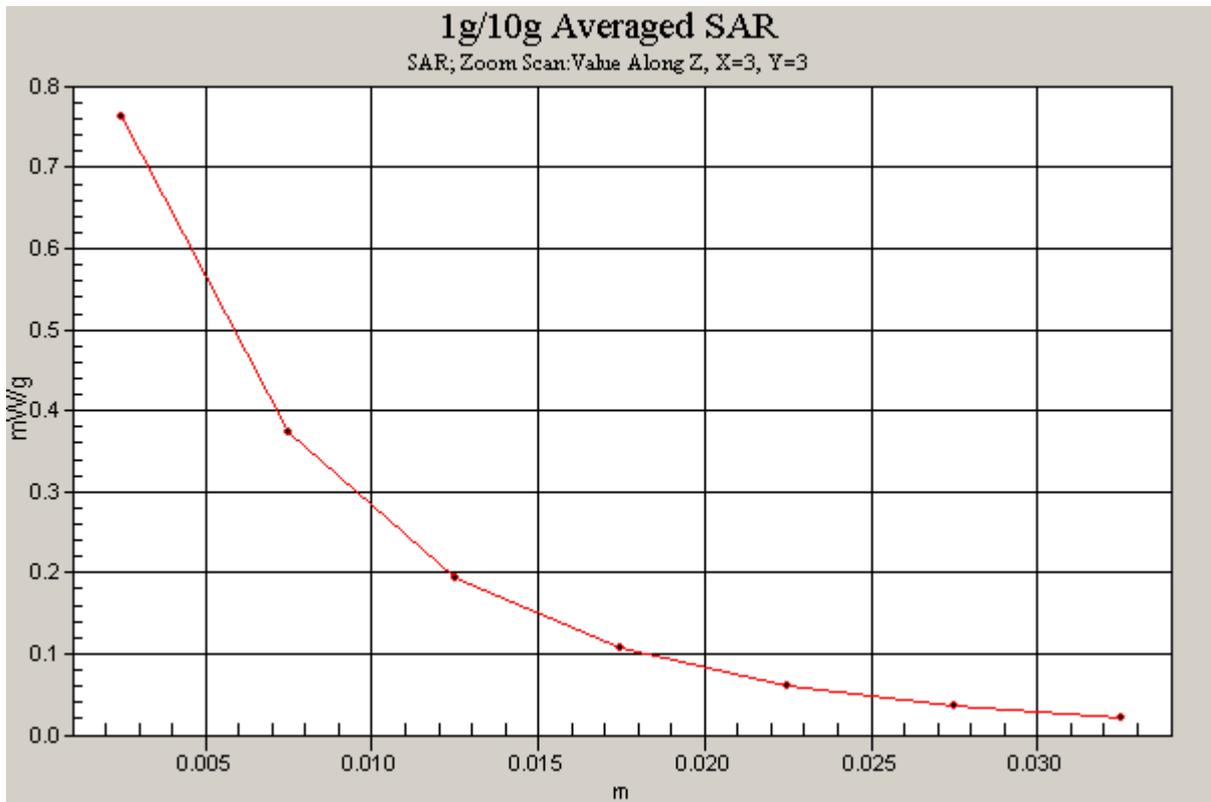


Figure 48 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 661]

**GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2
Low Frequency**

Date/Time: 5/23/2009 10:07:16 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1850.2 MHz;Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liqjud Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.958 mW/g


Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.616 mW/g; SAR(10 g) = 0.289 mW/g

Maximum value of SAR (measured) = 0.861 mW/g

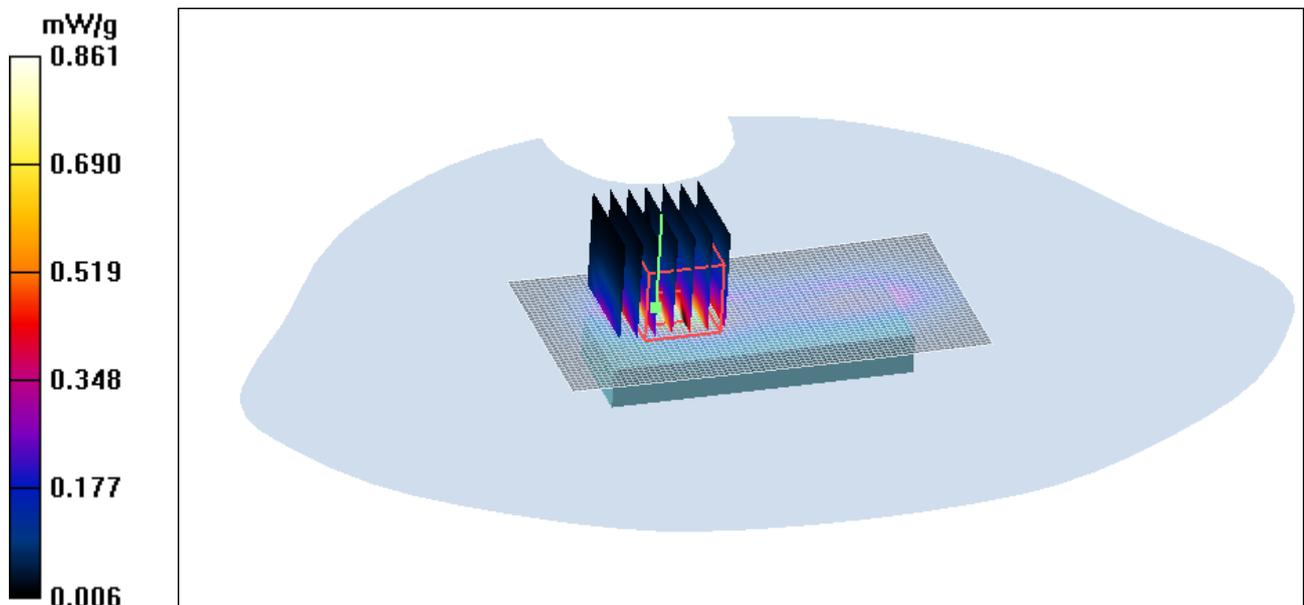

**Figure 49 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2
Channel 512**

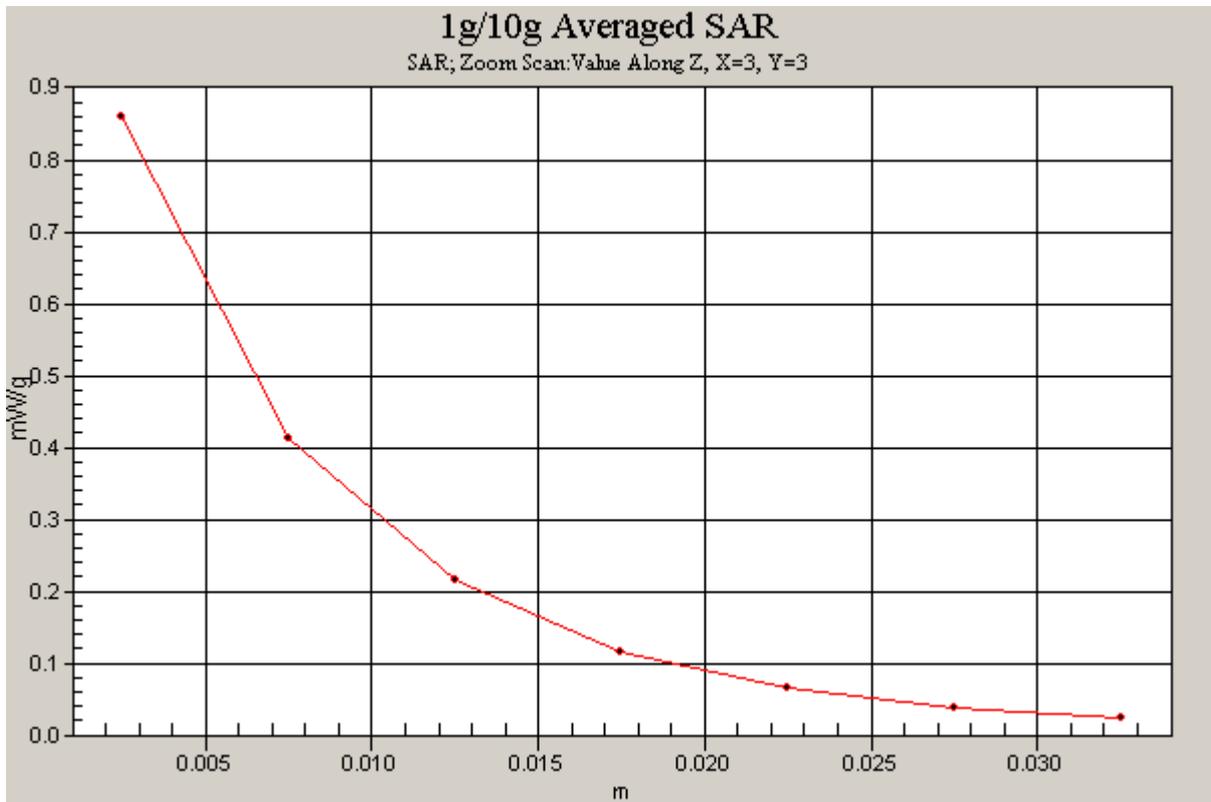


Figure 50 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 512]

GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Middle Frequency

Date/Time: 5/23/2009 4:28:24 AM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz;Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature:22.3 °C Liqjud Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (41x41x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.358 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.4 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 0.770 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.423 mW/g

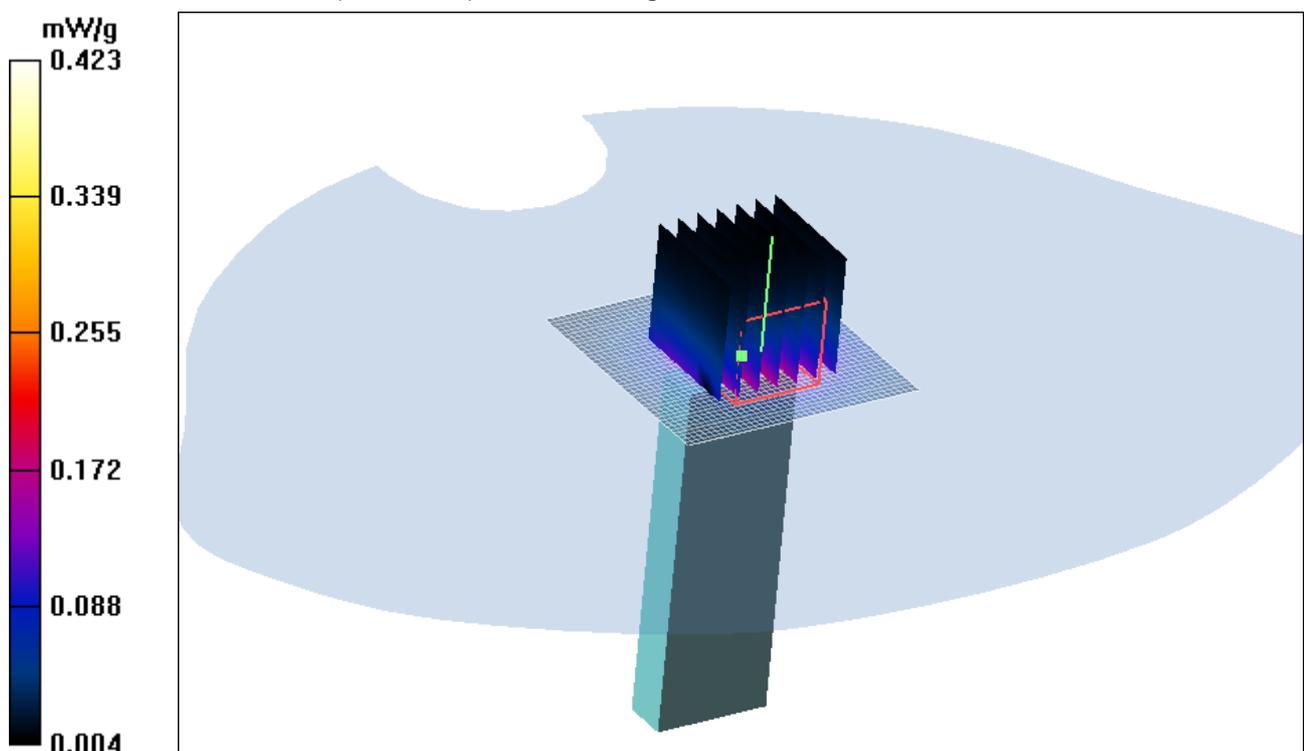


Figure 51 GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 661

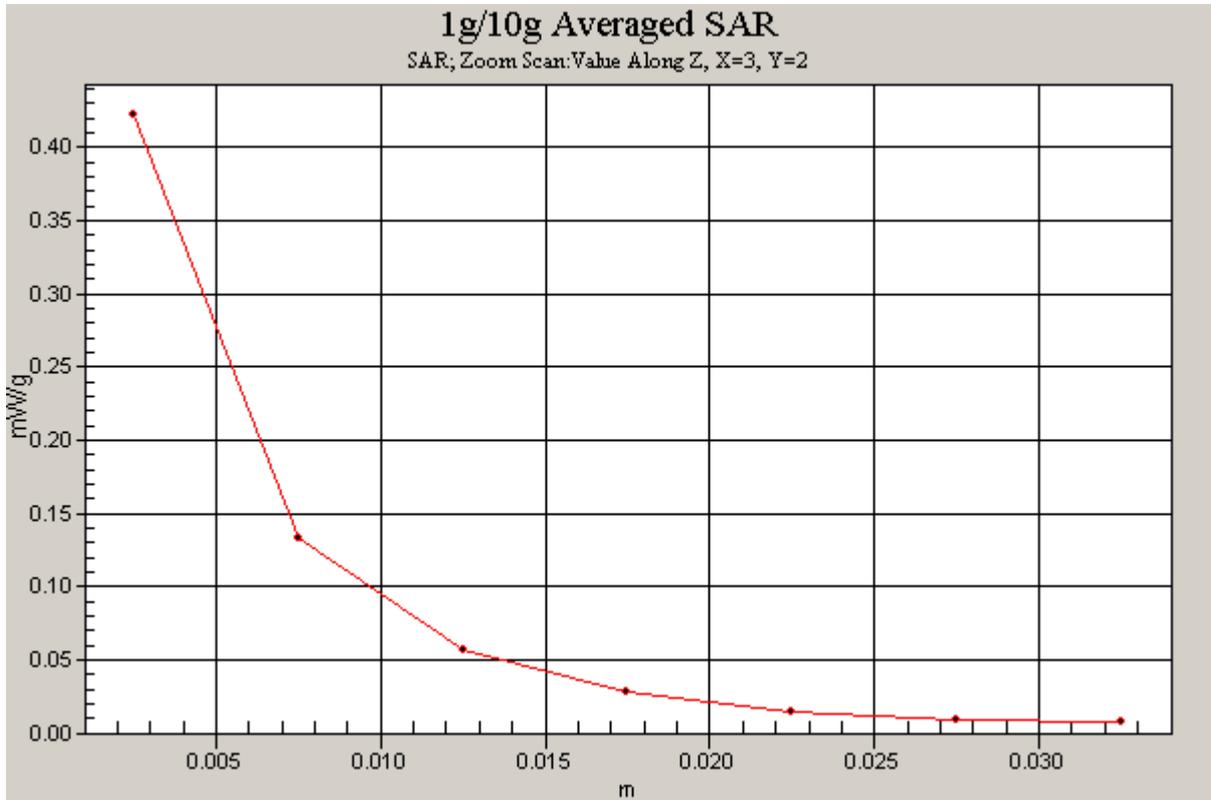


Figure 52 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 3 Channel 661]

GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 4 Middle Frequency

Date/Time: 5/23/2009 8:43:33 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.594 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.821 W/kg

SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.587 mW/g

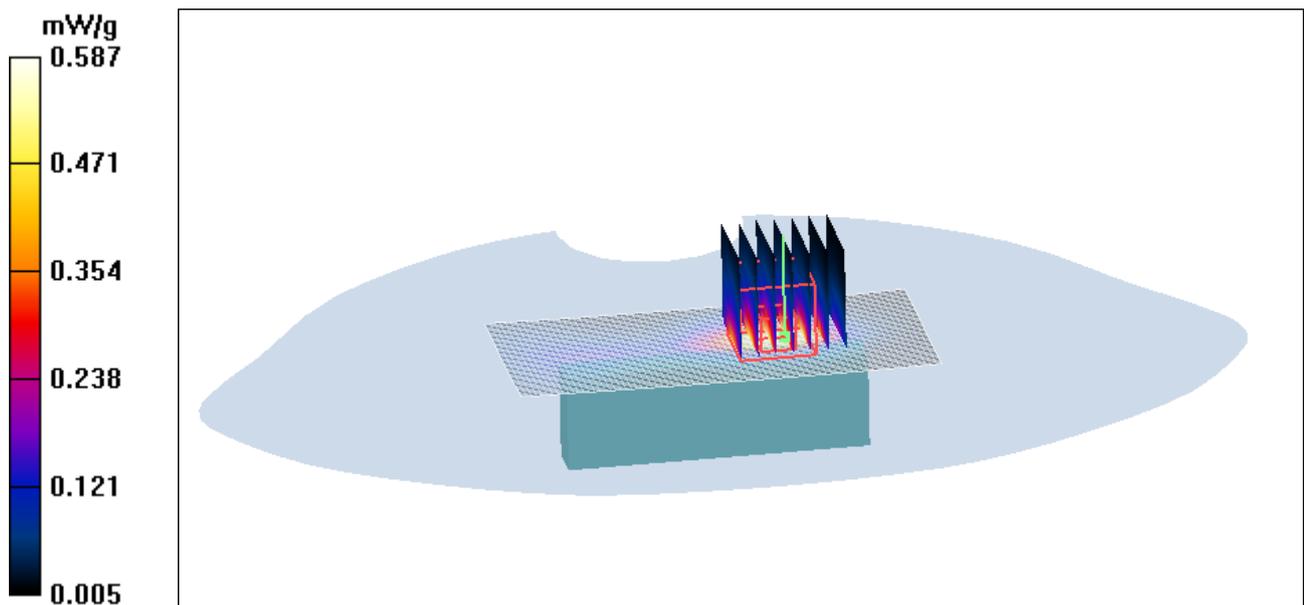


Figure 53 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 4 Channel 661

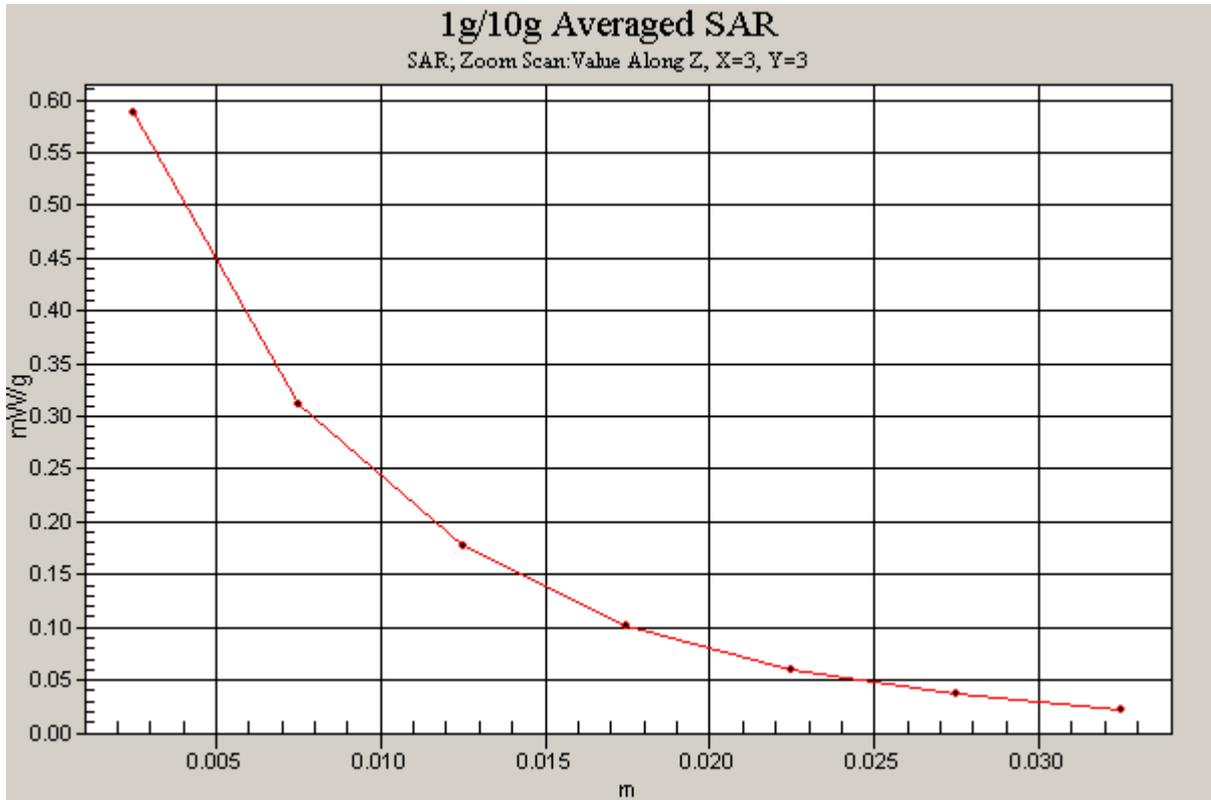


Figure 54 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 4 Channel 661]

GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 5 Middle Frequency

Date/Time: 5/23/2009 8:19:42 PM

Communication System: PCS 1900+GPRS(2Up); Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.350 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = 0.060 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.240 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.306 mW/g

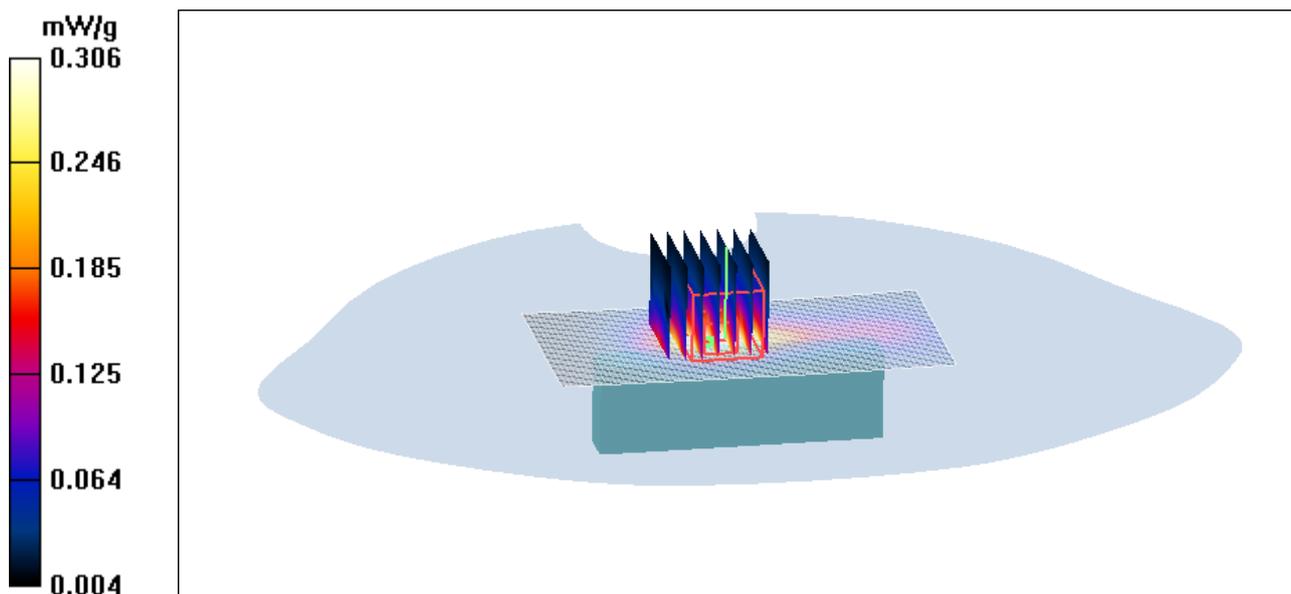


Figure 55 GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 5 Channel 661

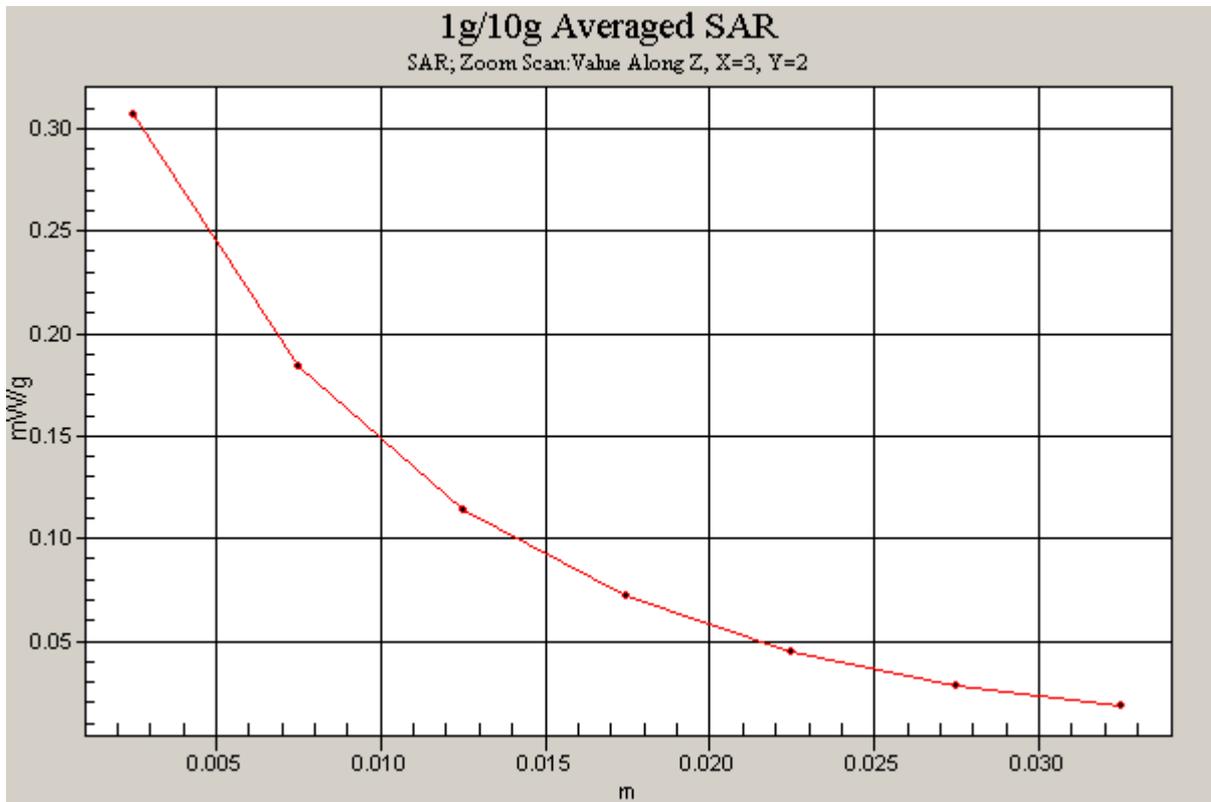


Figure 56 Z-Scan at power reference point [GSM 1900 GPRS (2 timeslots in uplink) with IBM T61 Test Position 5 Channel 661]

**GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2
Low Frequency**

Date/Time: 5/24/2009 4:46:33 PM

Communication System: PCS 1900+EGPRS(2Up); Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.995 mW/g


Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.6 V/m; Power Drift = -0.181 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.600 mW/g; SAR(10 g) = 0.305 mW/g

Maximum value of SAR (measured) = 0.839 mW/g

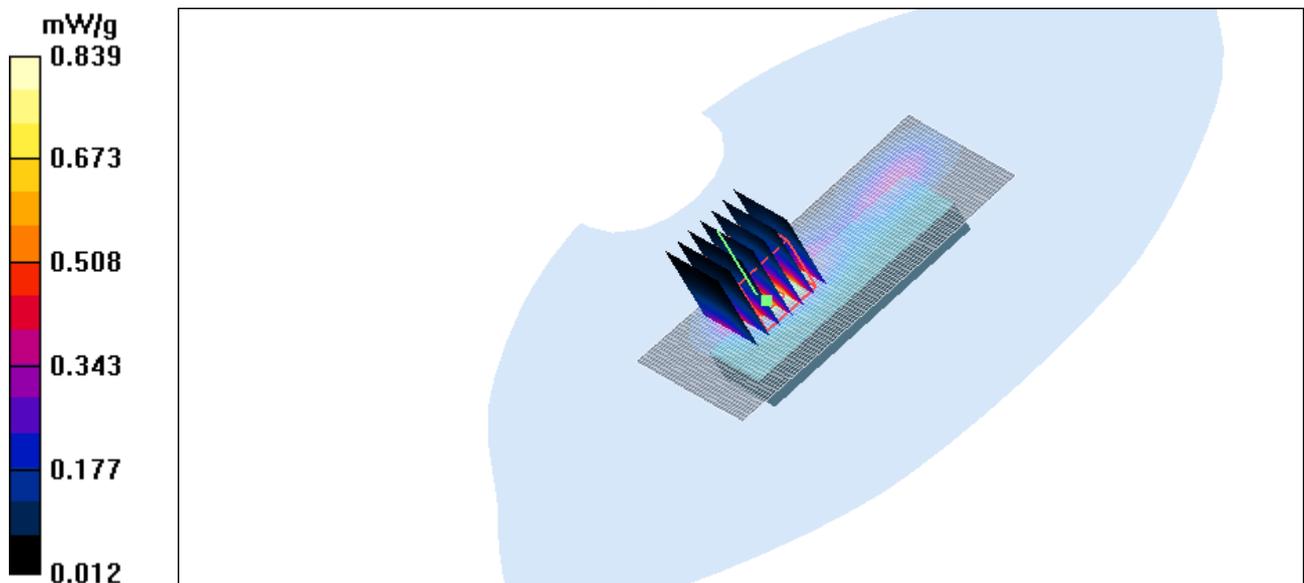

**Figure 57 GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2
Channel 512**

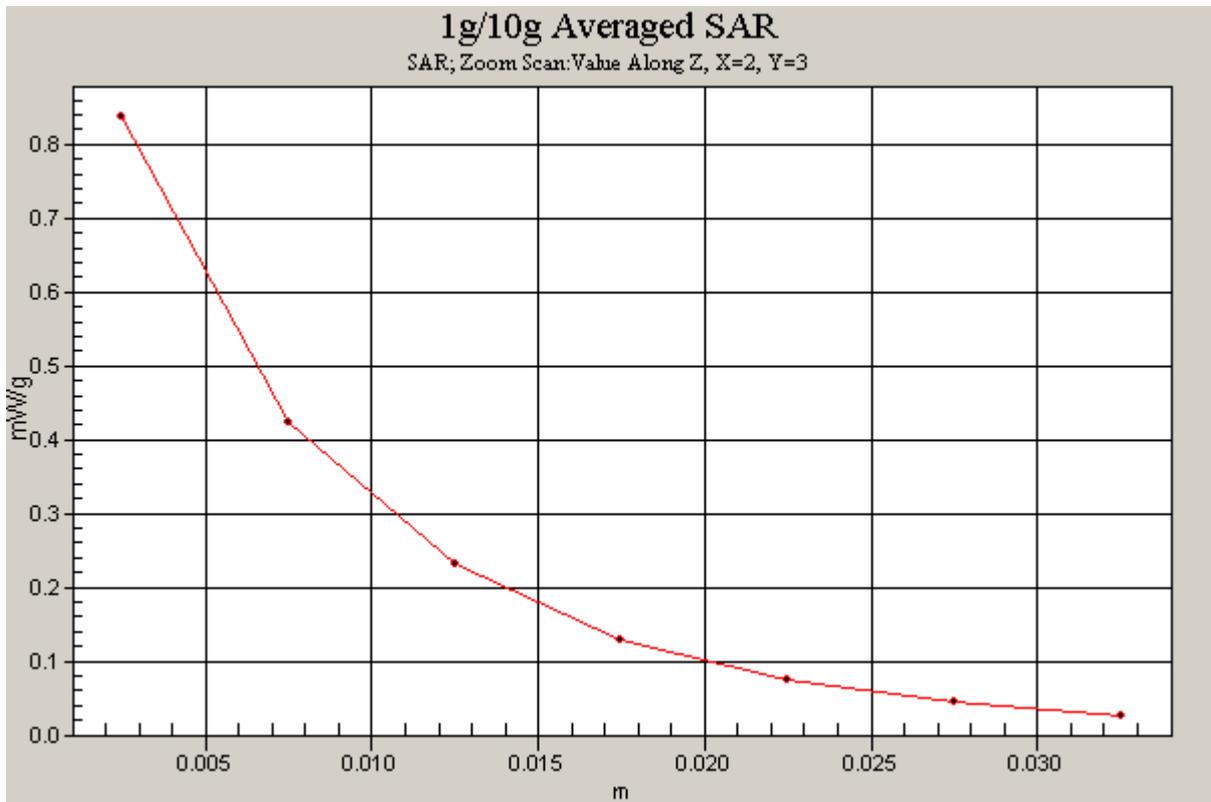


Figure 58 Z-Scan at power reference point [GSM 1900 EGPRS (2 timeslots in uplink) with BenQ Joybook R55V Test Position 2 Channel 512]

WCDMA Band II with BenQ Joybook R55V Test Position 1 High Frequency

Date/Time: 6/4/2009 2:28:49 AM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.22 mW/g

Test Position 1 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.182 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.889 mW/g; SAR(10 g) = 0.478 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

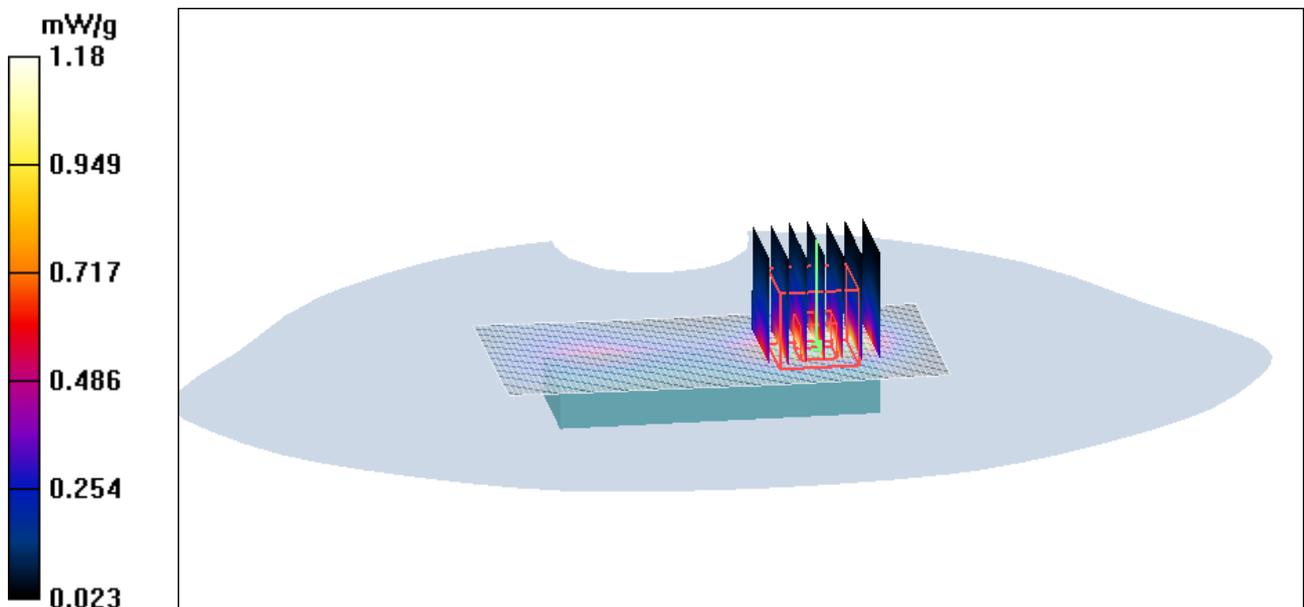


Figure 59 WCDMA Band II with BenQ Joybook R55V Test Position 1 Channel 9538

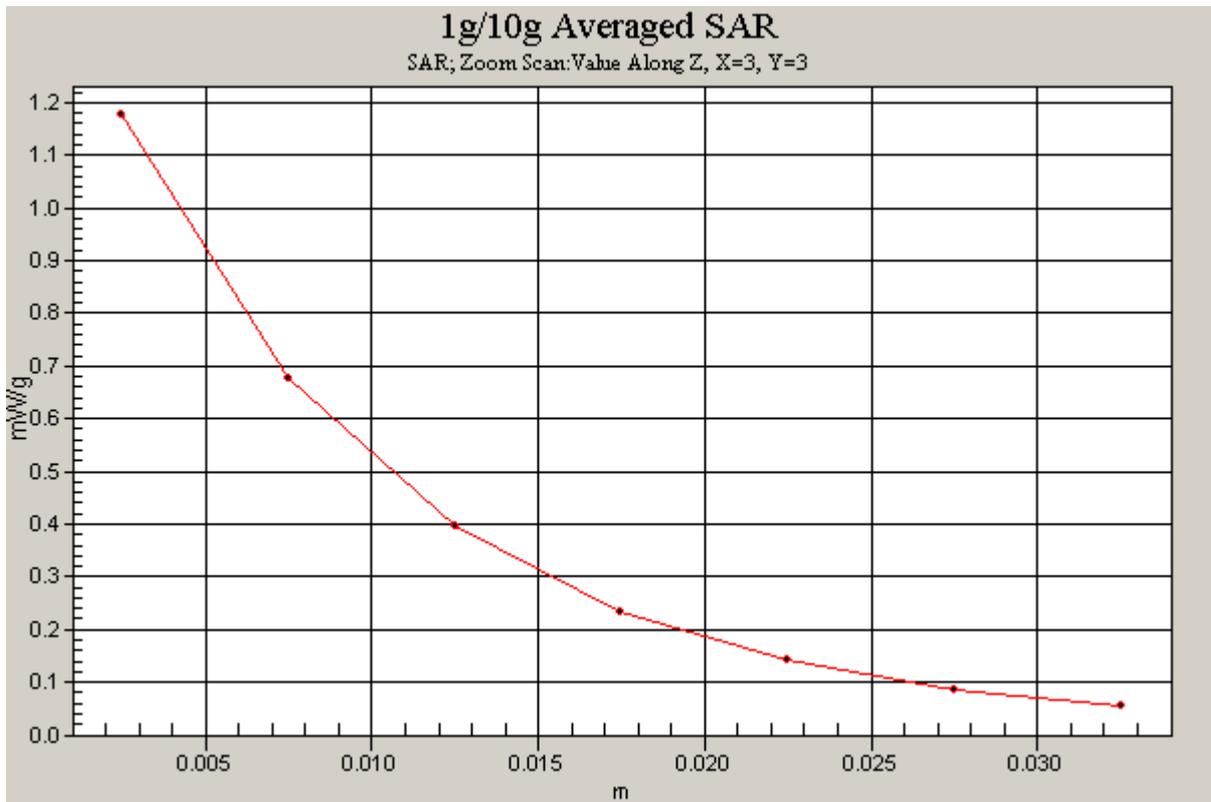


Figure 60 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 1 Channel 9538]

WCDMA Band II with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 6/4/2009 2:59:51 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.26 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 1.57 W/kg

SAR(1 g) = 0.871 mW/g; SAR(10 g) = 0.465 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

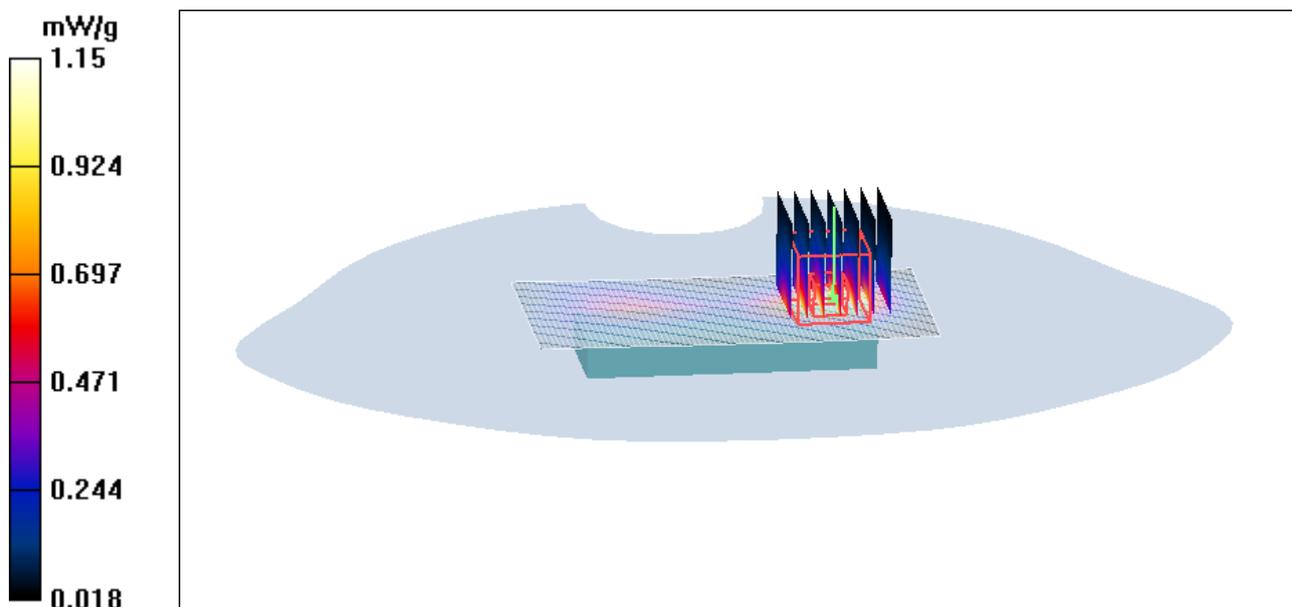


Figure 61 WCDMA Band II with BenQ Joybook R55V Test Position 1 Channel 9400

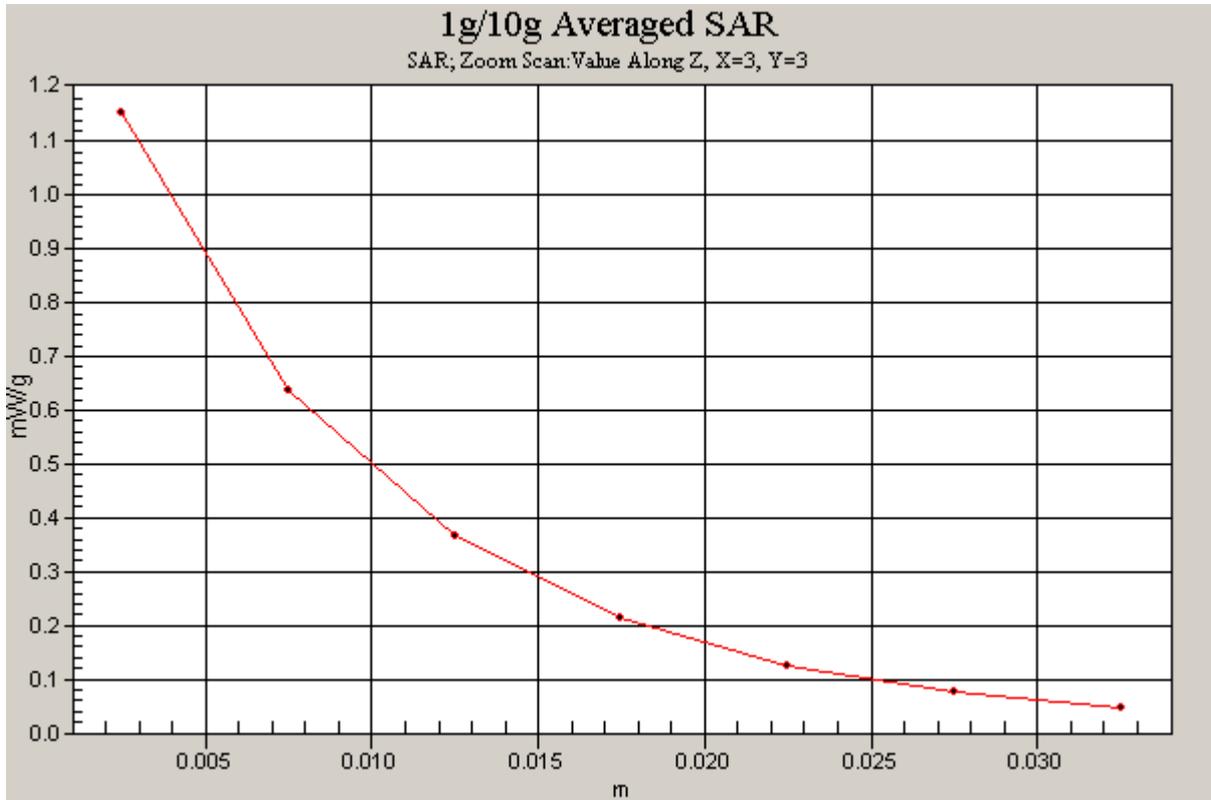


Figure 62 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 1 Channel 9400]

WCDMA Band II with BenQ Joybook R55V Test Position 1 Low Frequency

Date/Time: 6/4/2009 2:27:00 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 mW/g

Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.948 mW/g; SAR(10 g) = 0.511 mW/g

Maximum value of SAR (measured) = 1.24 mW/g

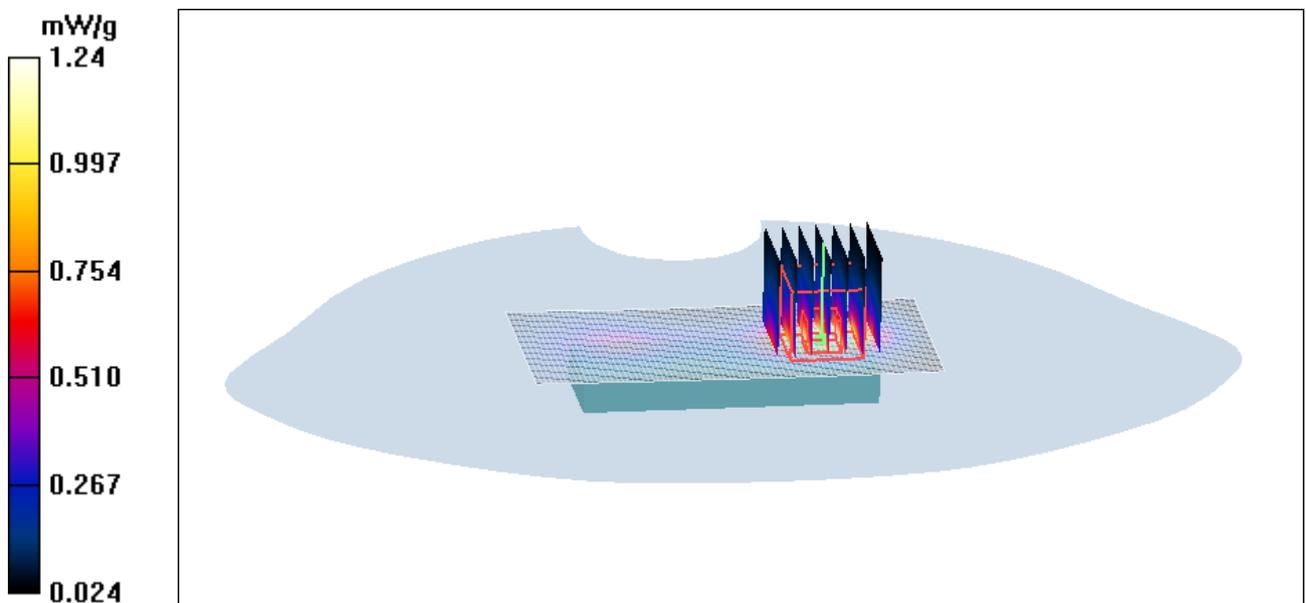


Figure 63 WCDMA Band II with BenQ Joybook R55V Test Position 1 Channel 9262

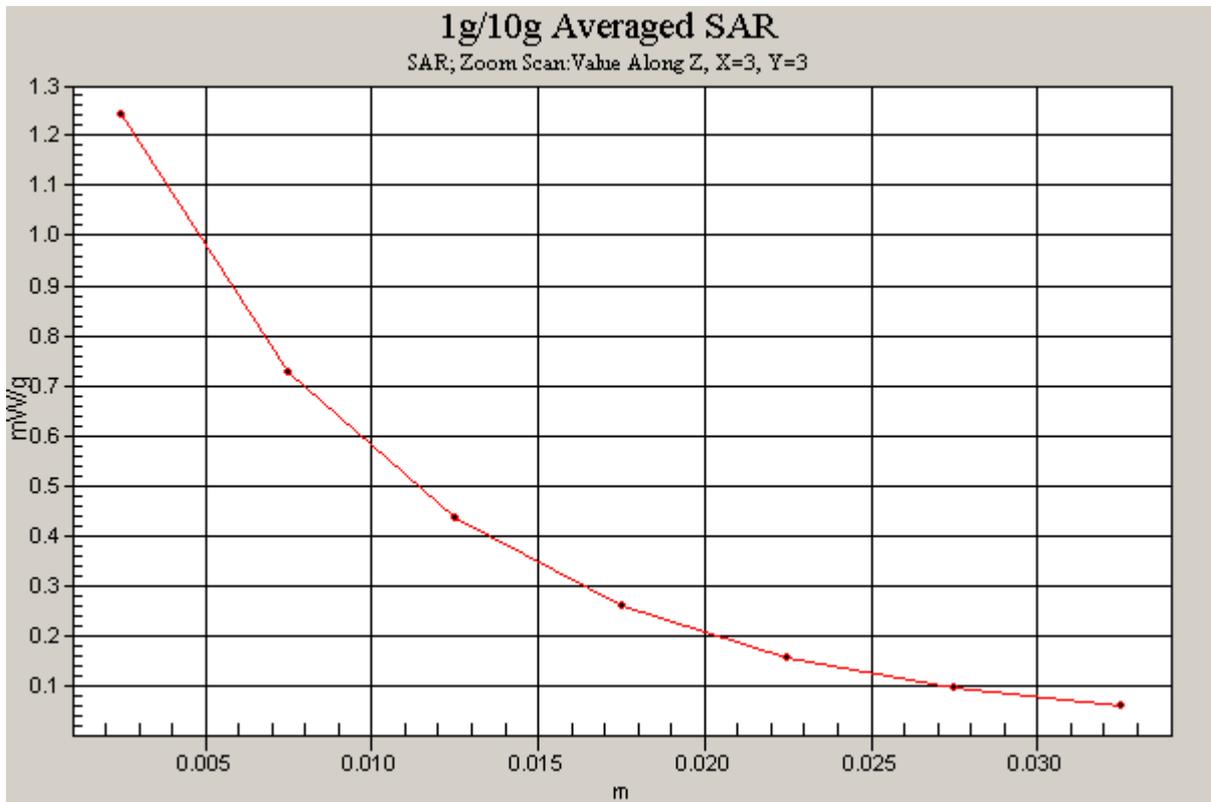


Figure 64 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 1 Channel 9262]

WCDMA Band II with BenQ Joybook R55V Test Position 2 High Frequency

Date/Time: 6/4/2009 3:27:03 PM

Communication System: WCDMA Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1908$ MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 52.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.37 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.988 mW/g; SAR(10 g) = 0.551 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.2 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.694 mW/g; SAR(10 g) = 0.363 mW/g

Maximum value of SAR (measured) = 0.916 mW/g

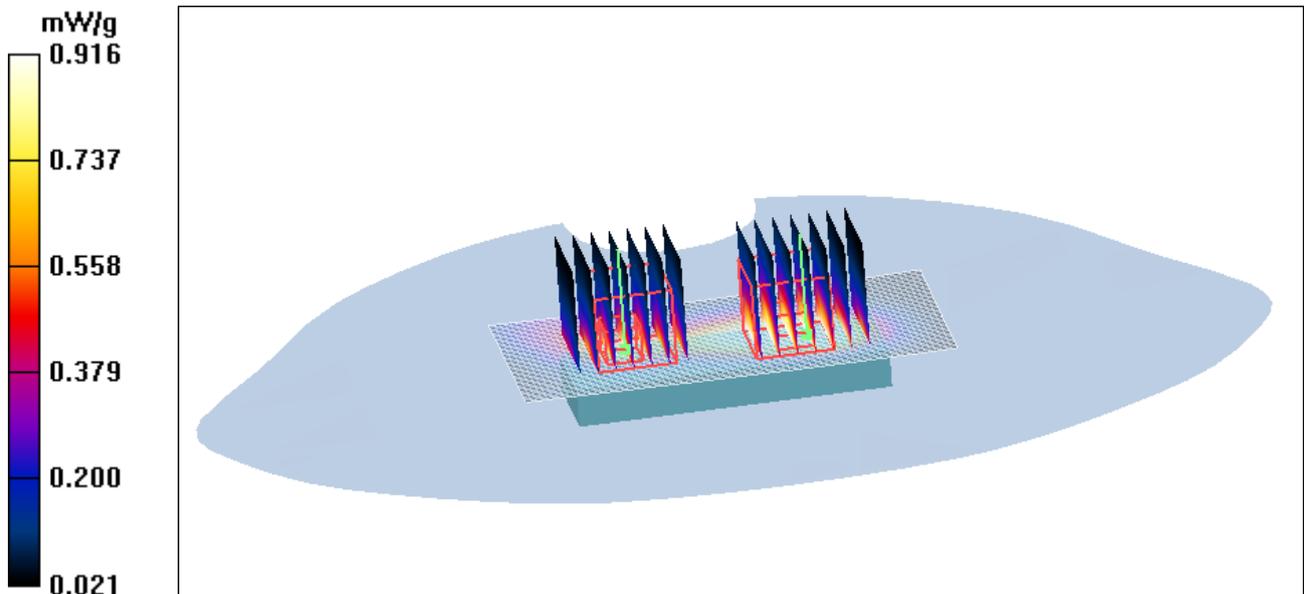


Figure 65 WCDMA Band II with BenQ Joybook R55V Test Position 2 Channel 9538

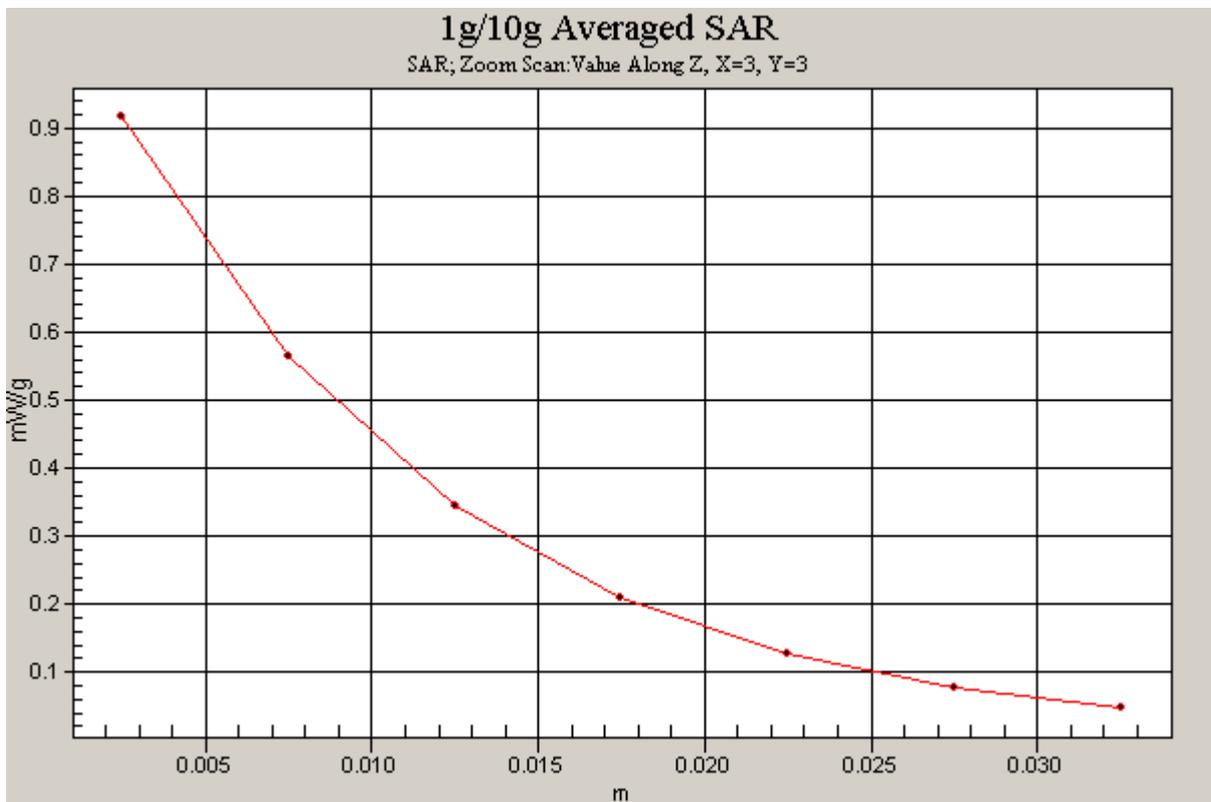
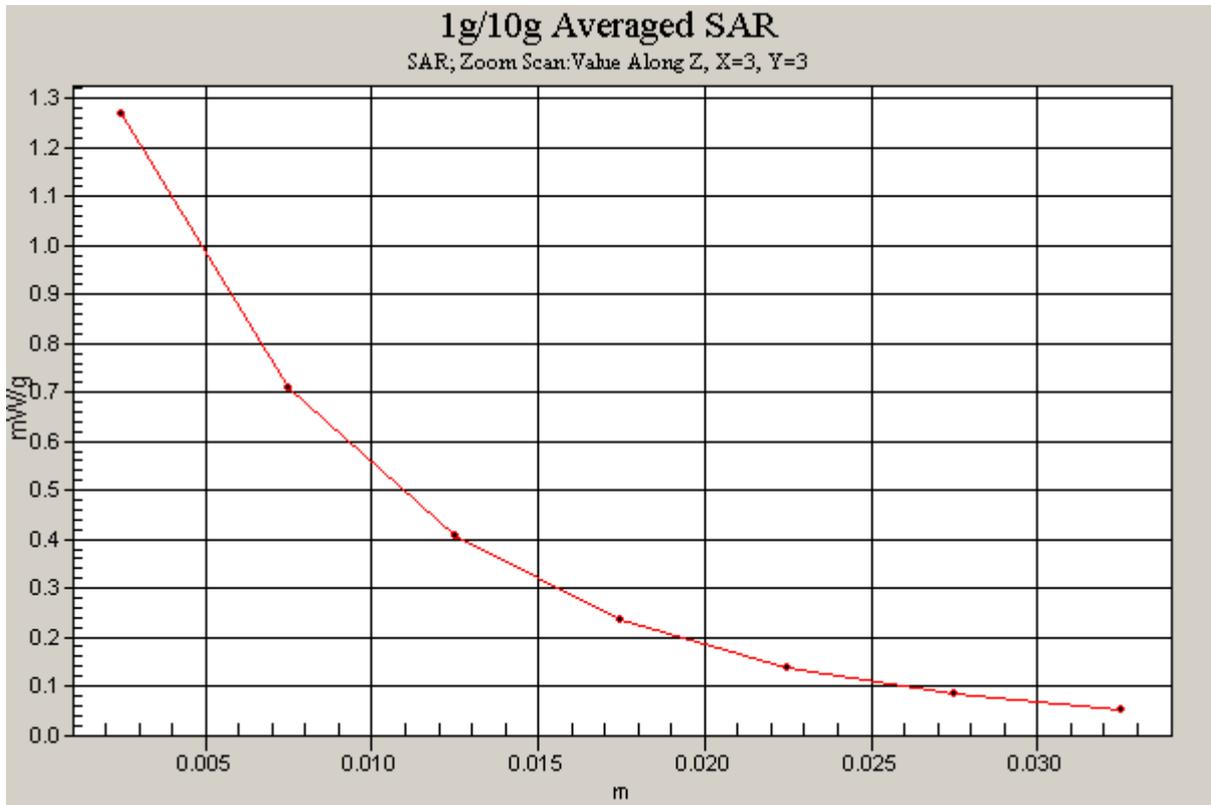


Figure 66 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 2 Channel 9538]

WCDMA Band II with BenQ Joybook R55V Test Position 2 Middle Frequency

Date/Time: 6/4/2009 4:01:21 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Position 2 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.72 mW/g

Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.4 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 2.08 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.590 mW/g

Maximum value of SAR (measured) = 1.49 mW/g

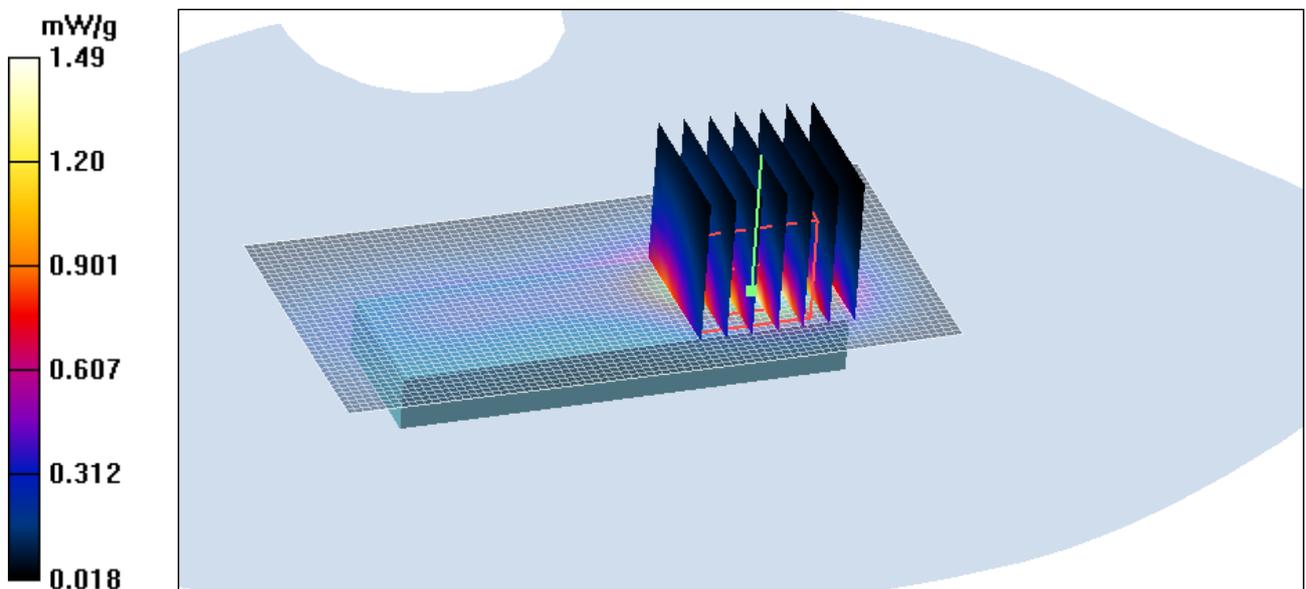


Figure 67 WCDMA Band II with BenQ Joybook R55V Test Position 2 Channel 9400

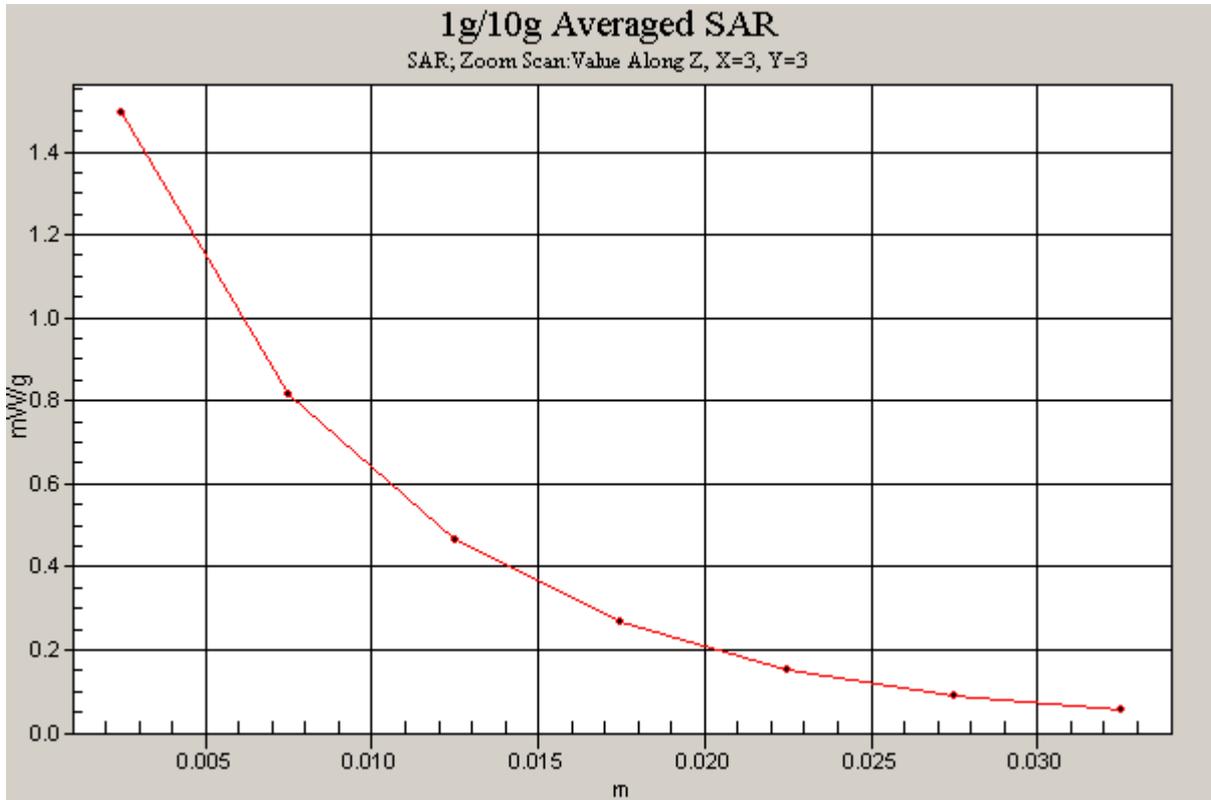


Figure 68 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 2 Channel 9400]

WCDMA Band II with BenQ Joybook R55V Test Position 2 Low Frequency

Date/Time: 6/4/2009 5:01:06 PM

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.76 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.595 mW/g

Maximum value of SAR (measured) = 1.55 mW/g

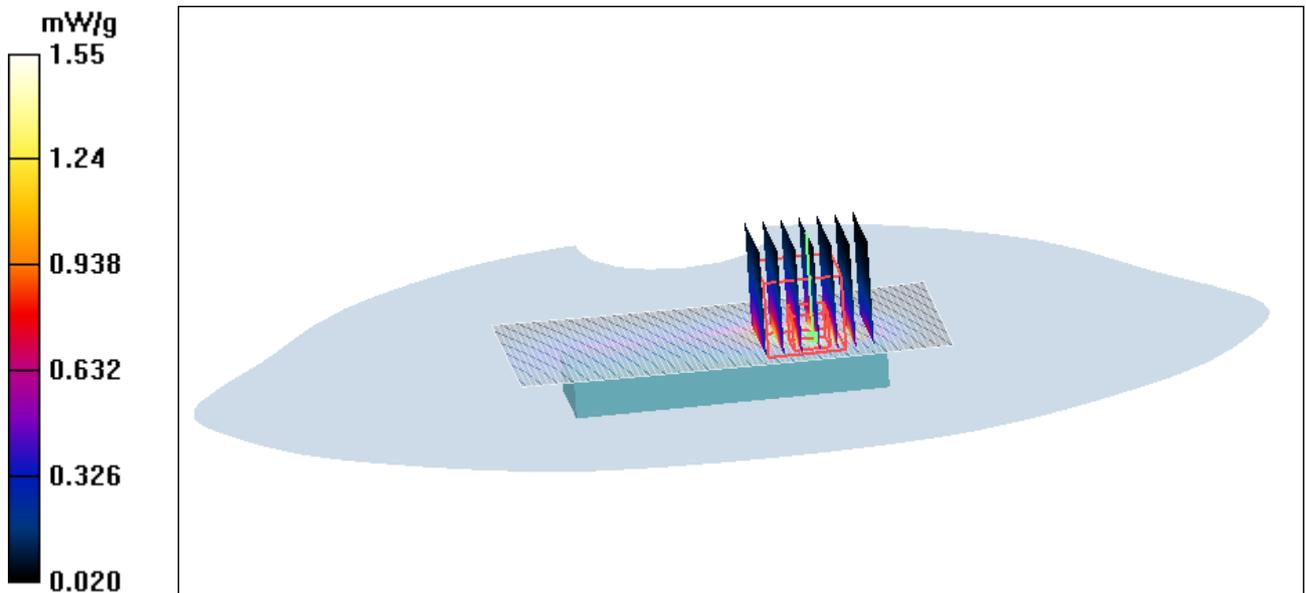


Figure 69 WCDMA Band II with BenQ Joybook R55V Test Position 2 Channel 9262

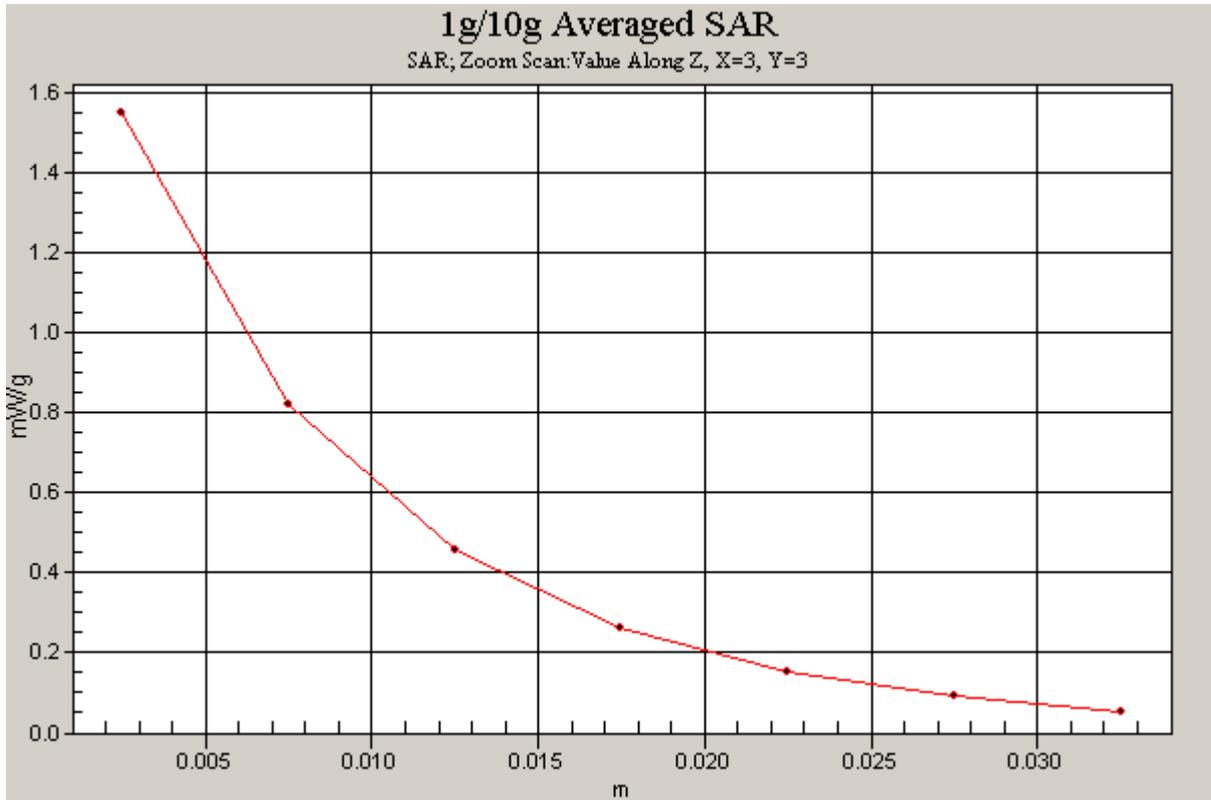


Figure 70 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 2 Channel 9262]

WCDMA Band II with BenQ Joybook R55V Test Position 3 Middle Frequency

Date/Time: 6/4/2009 6:51:59 PM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (41x41x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.7 V/m; Power Drift = -0.098 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.620 mW/g; SAR(10 g) = 0.258 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

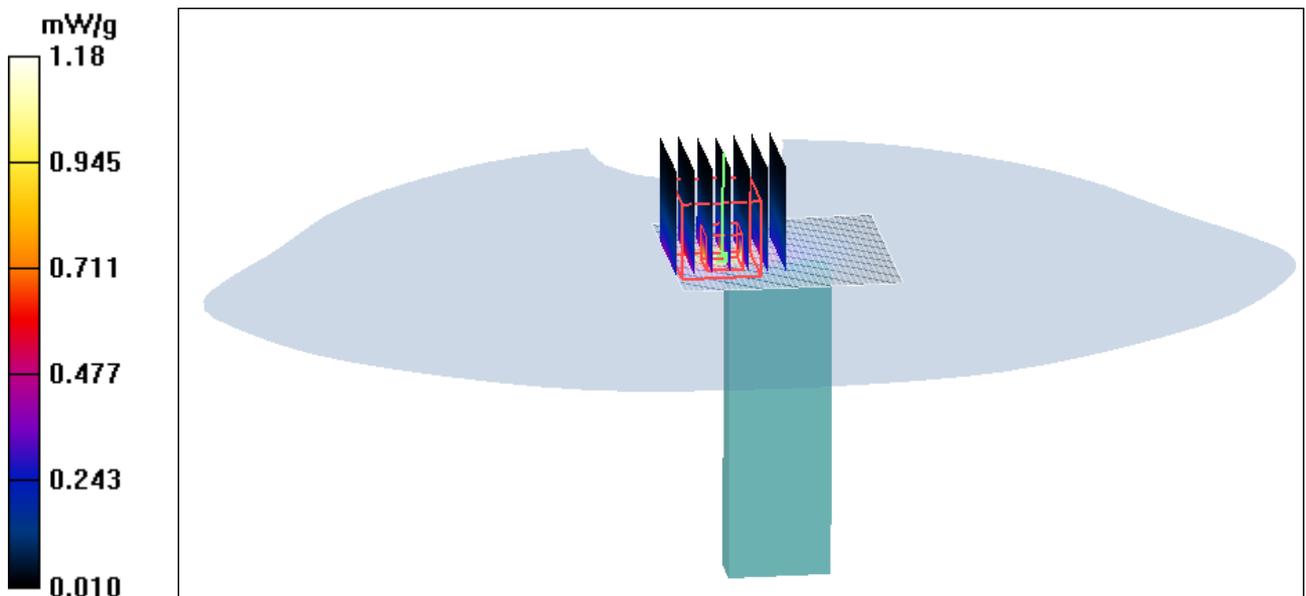


Figure 71 WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9400

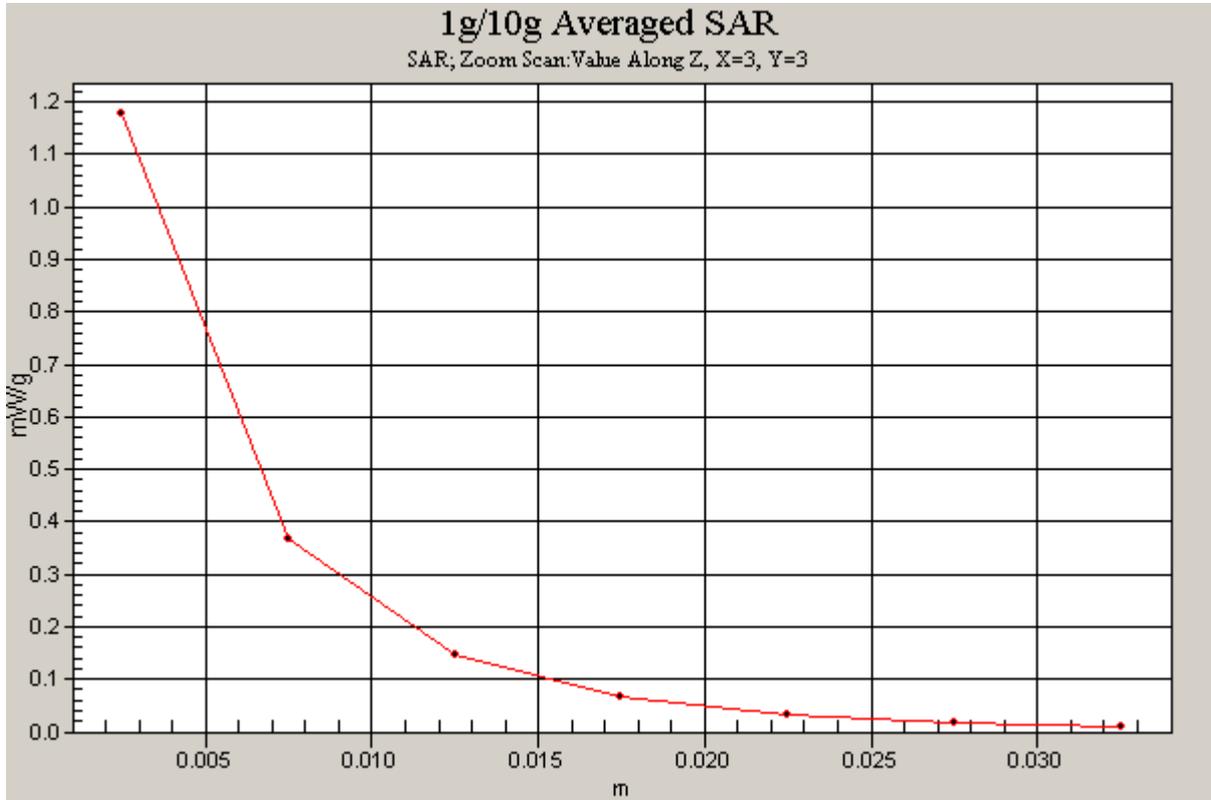


Figure 72 Z-Scan at power reference point [WCDMA Band II with BenQ Joybook R55V Test Position 3 Channel 9400]

WCDMA Band II with IBM T61 Test Position 4 Middle Frequency

Date/Time: 6/4/2009 10:51:57 AM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (31x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.969 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.185 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.332 mW/g

Maximum value of SAR (measured) = 0.863 mW/g

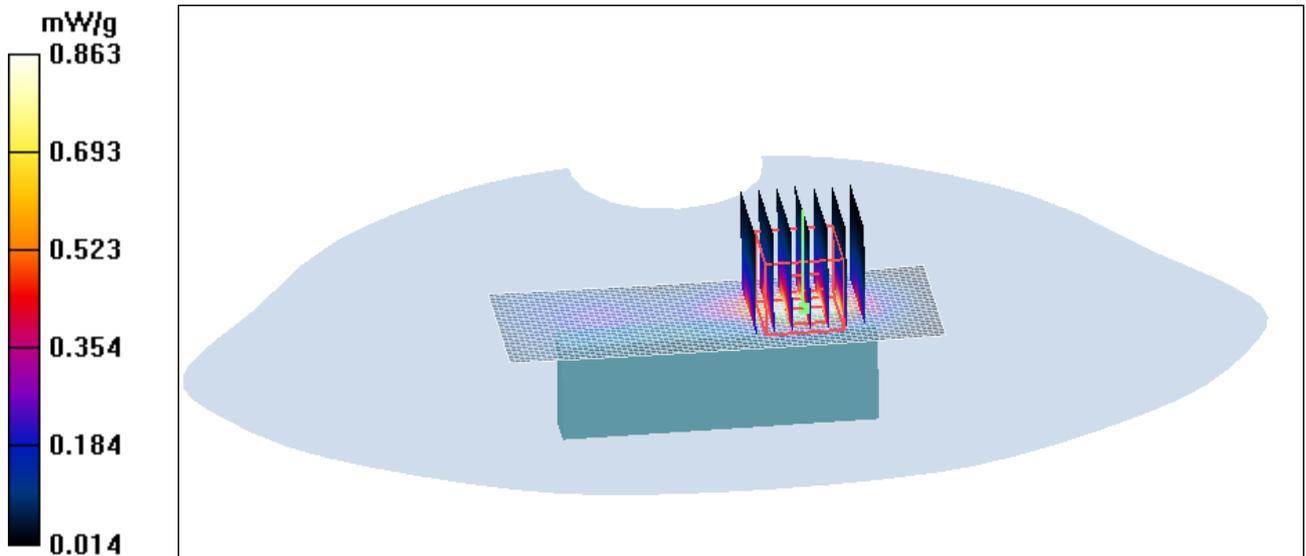


Figure 73 WCDMA Band II with IBM T61 Test Position 4 Channel 9400

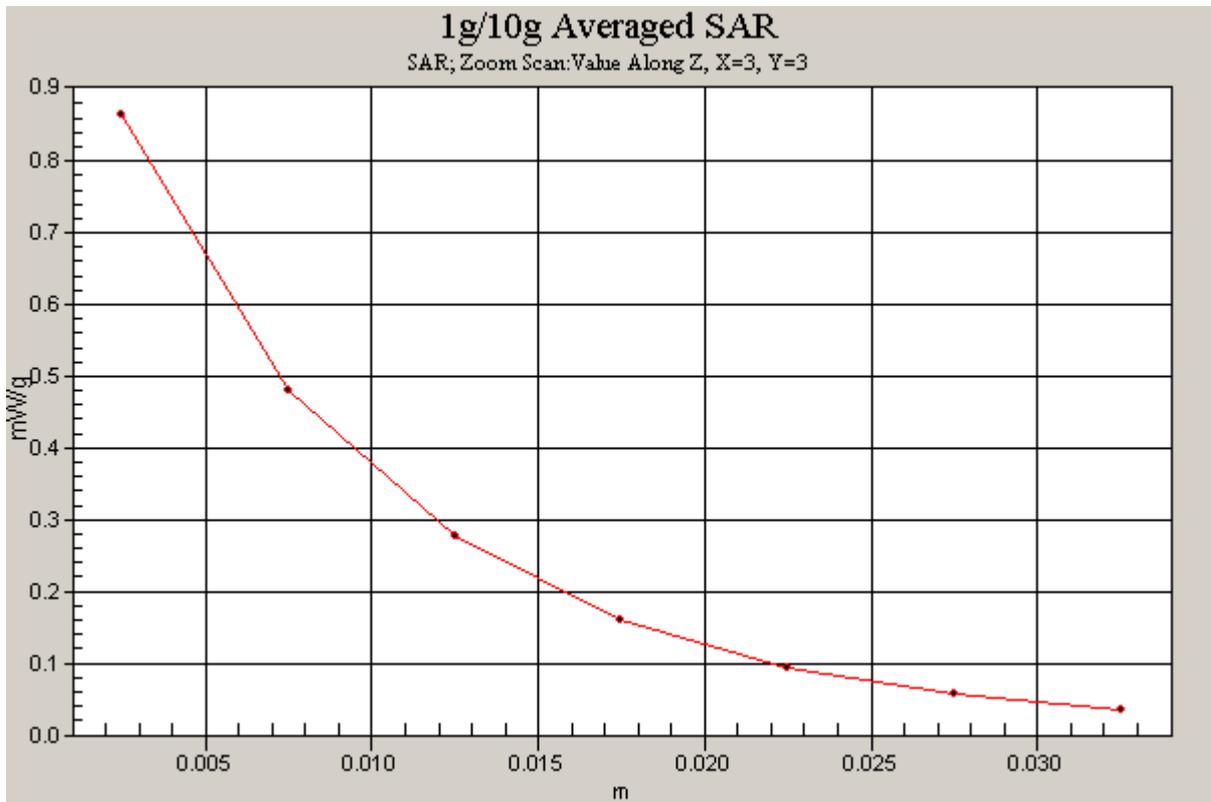


Figure 74 Z-Scan at power reference point [WCDMA Band II with IBM T61 Test Position 4 Channel 9400]

WCDMA Band II with IBM T61 Test Position 5 Middle Frequency

Date/Time: 6/4/2009 11:10:47 AM

Communication System: WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (31x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.571 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.6 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.547 mW/g

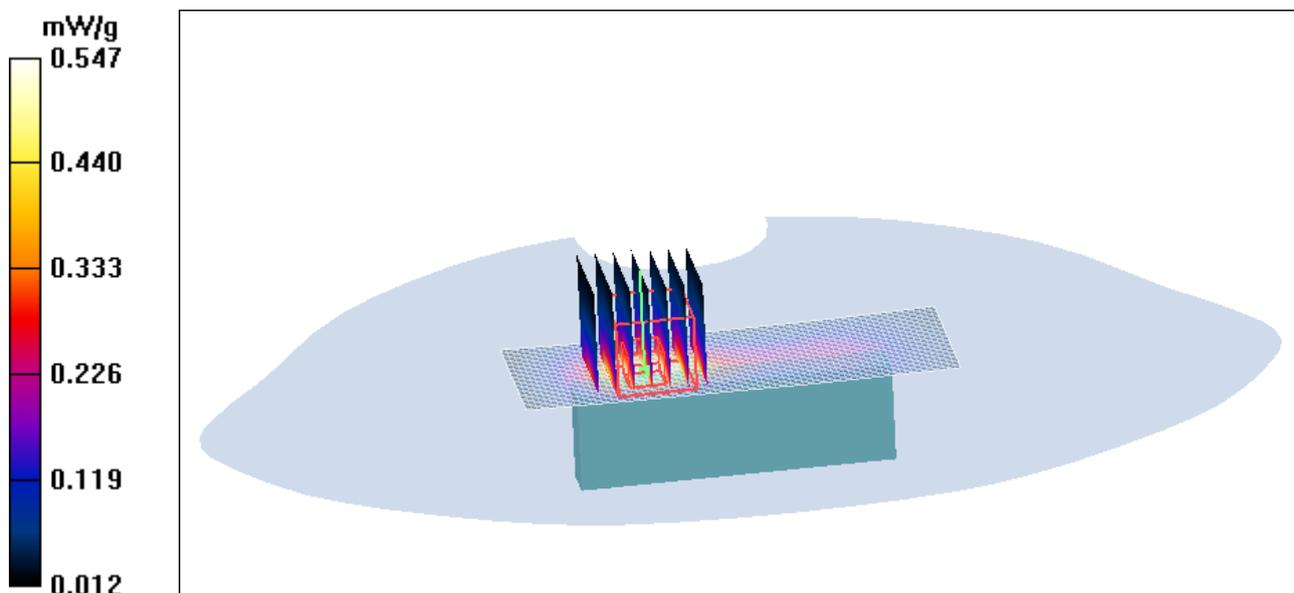


Figure 75 WCDMA Band II with IBM T61 Test Position 5 Channel 9400

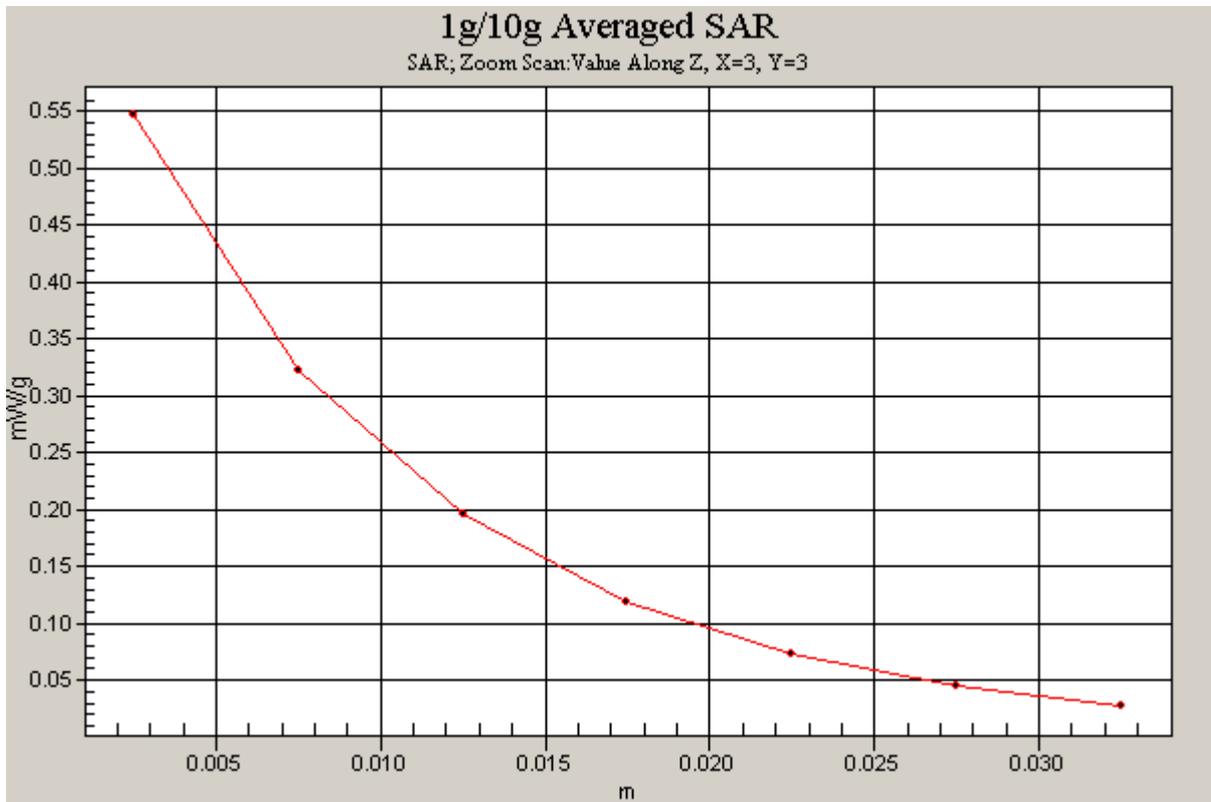


Figure 76 Z-Scan at power reference point [WCDMA Band II with IBM T61 Test Position 5 Channel 9400]

TA Technology (Shanghai) Co., Ltd.
Test Report

No. RZA2009-0599FCC

Page 113 of 166

WCDMA Band II+HSDPA with BenQ Joybook R55V Test Position 2 Low Frequency

Date/Time: 6/4/2009 9:05:16 PM

Communication System: WCDMA Band II+HSDPA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.49$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5°C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(7.45, 7.45, 7.45); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM000 T01 ; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.64 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.6 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.604 mW/g

Maximum value of SAR (measured) = 1.50 mW/g

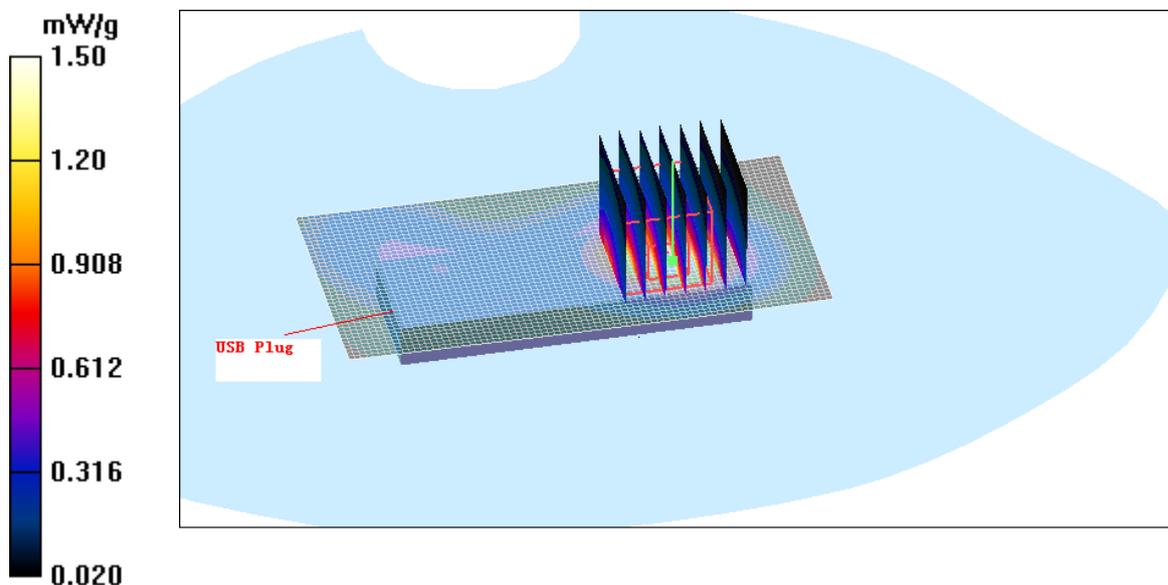


Figure 77 WCDMA Band II +HSDPA with BenQ Joybook R55V Test Position 2 Channel 9262

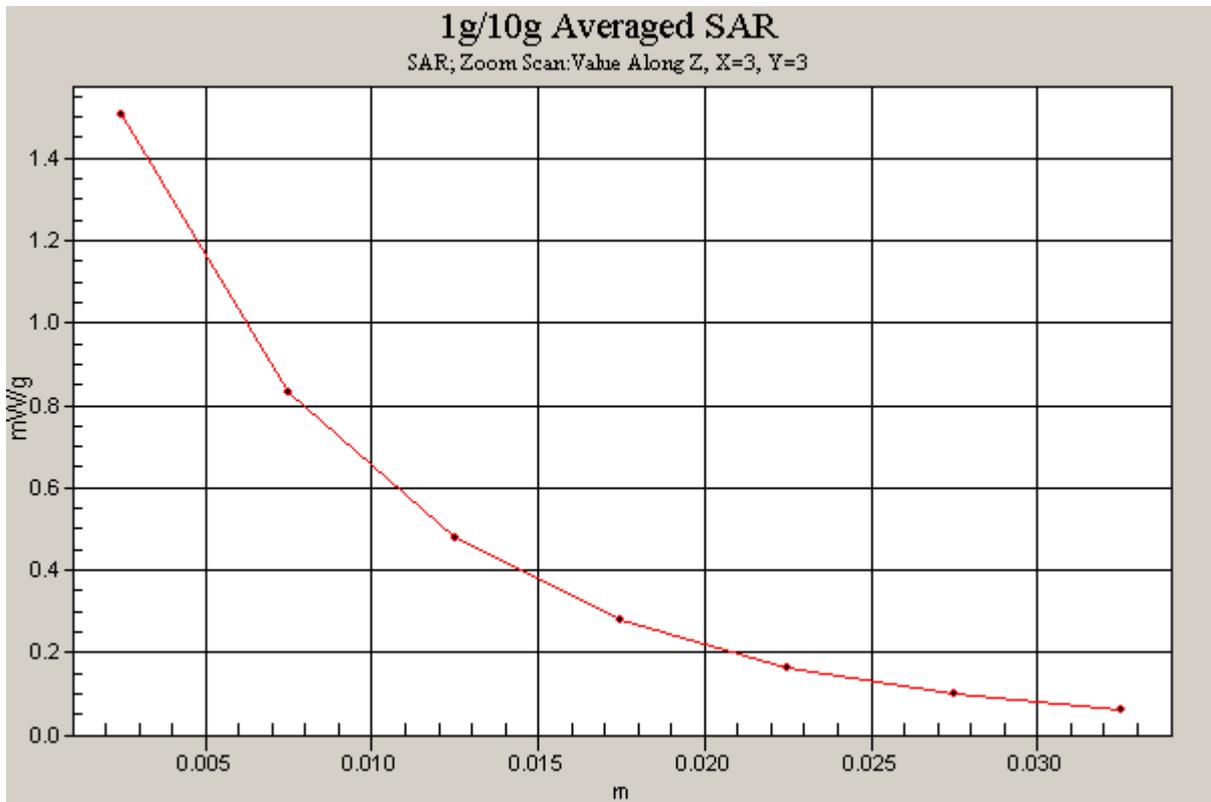


Figure 78 Z-Scan at power reference point [WCDMA Band II +HSDPA with BenQ Joybook R55V
Test Position 2 Channel 9262]

WCDMA Band V with BenQ Joybook R55V Test Position 1 Middle Frequency

Date/Time: 6/3/2009 7:27:52 PM

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 1 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.336 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.6 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.174 mW/g

Maximum value of SAR (measured) = 0.327 mW/g

Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.6 V/m; Power Drift = 0.110 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.177 mW/g; SAR(10 g) = 0.108 mW/g

Maximum value of SAR (measured) = 0.223 mW/g

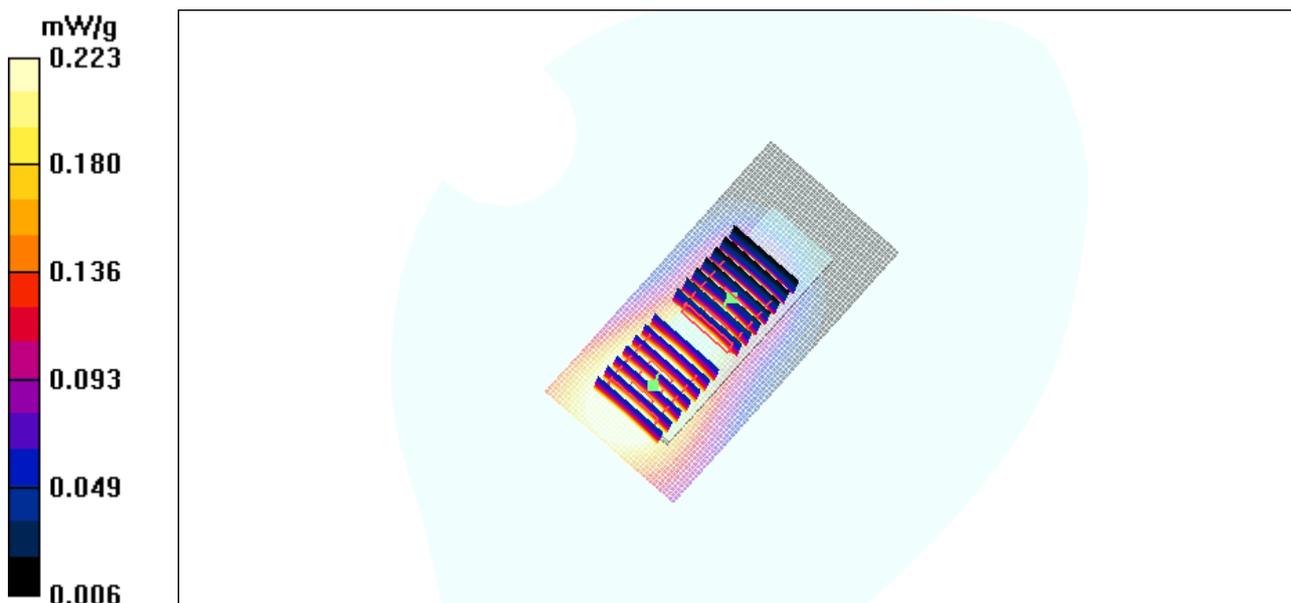


Figure 79 WCDMA Band V with BenQ Joybook R55V Test Position 1 Channel 4182

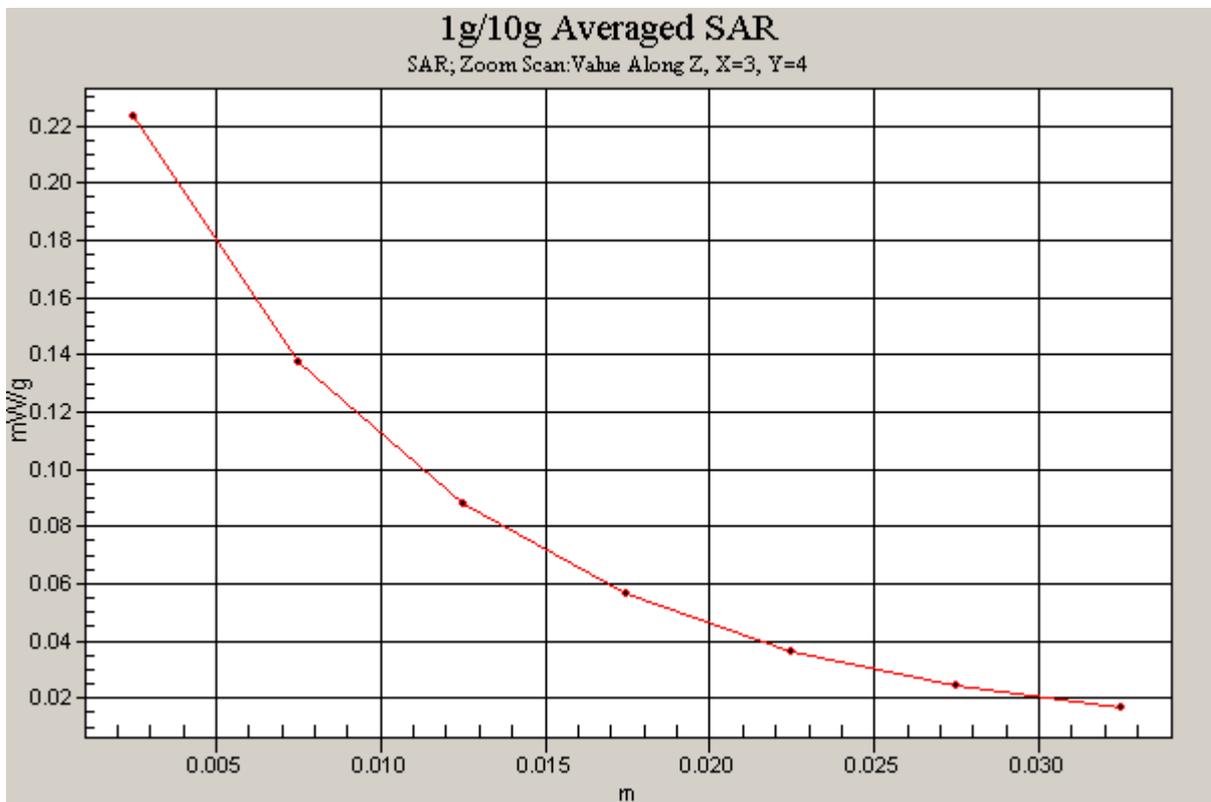
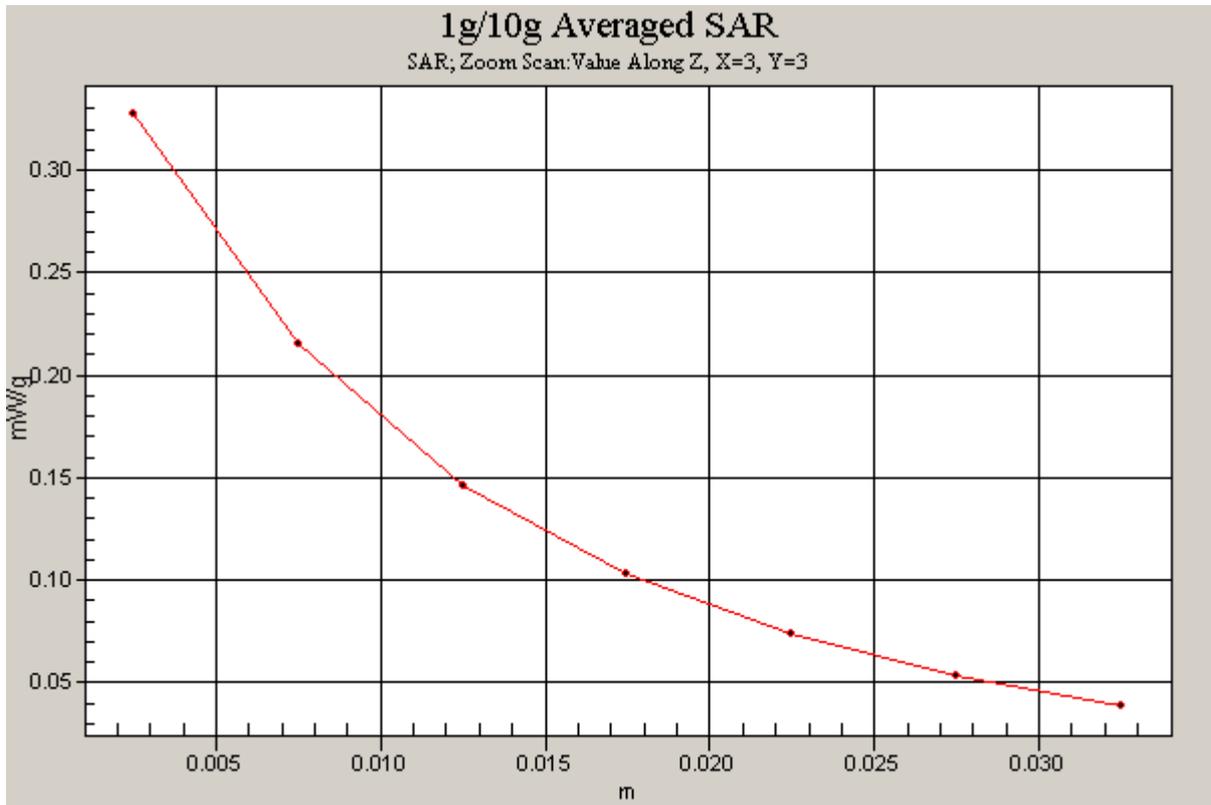


Figure 80 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position1 Channel 4182]

WCDMA Band V with BenQ Joybook R55V Test Position 2 High Frequency

Date/Time: 6/3/2009 9:11:34 PM

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.386 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.517 W/kg

SAR(1 g) = 0.288 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.363 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.7 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 0.387 W/kg

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.307 mW/g

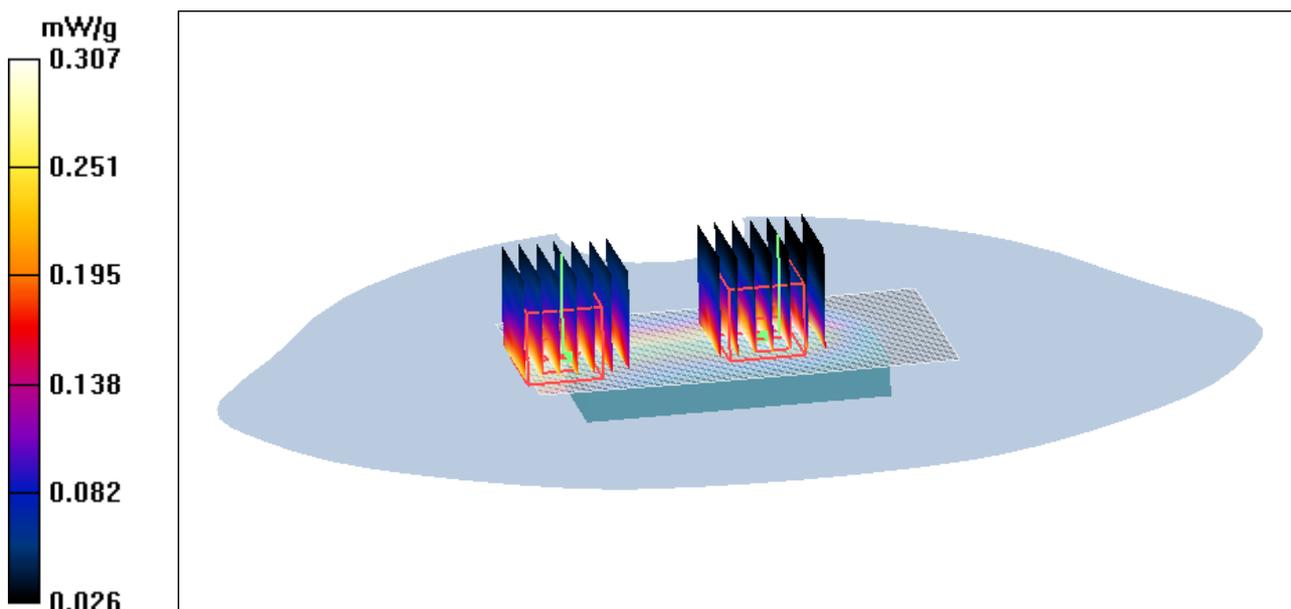


Figure 81 WCDMA Band V with BenQ Joybook R55V Test Position 2 Channel 4233

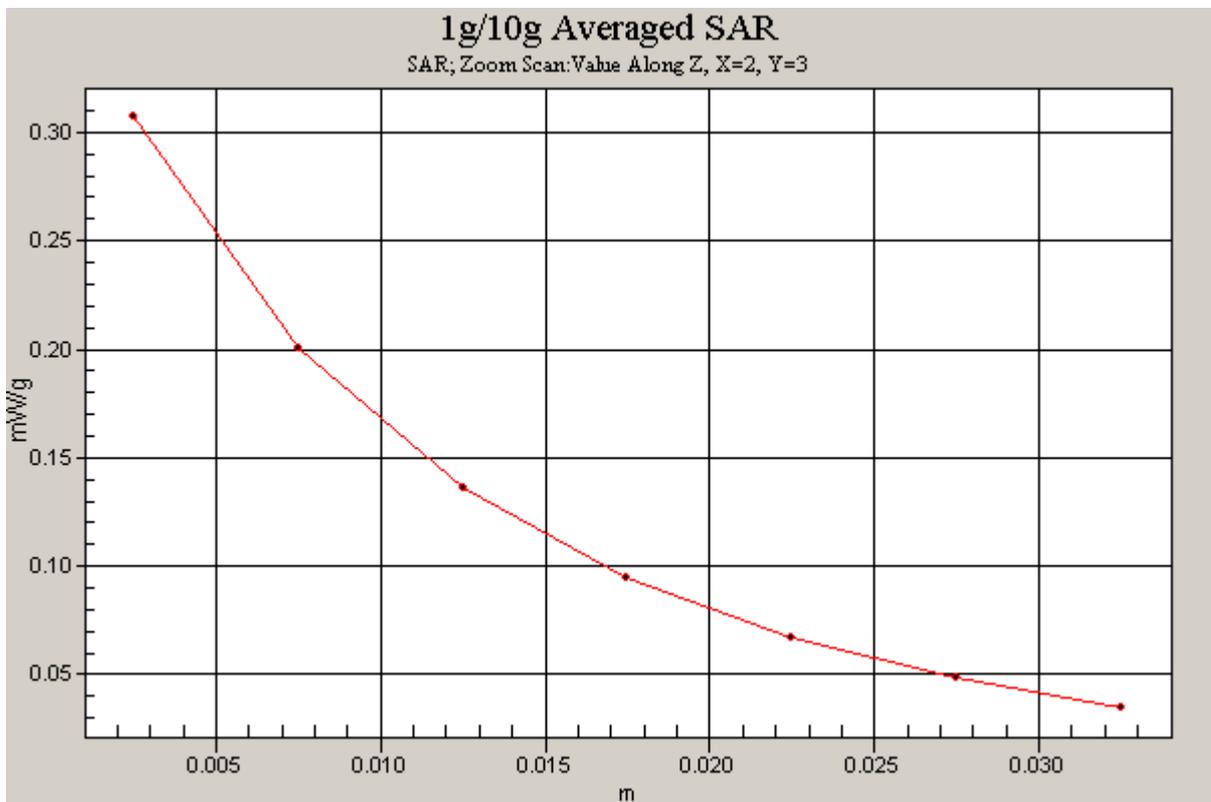
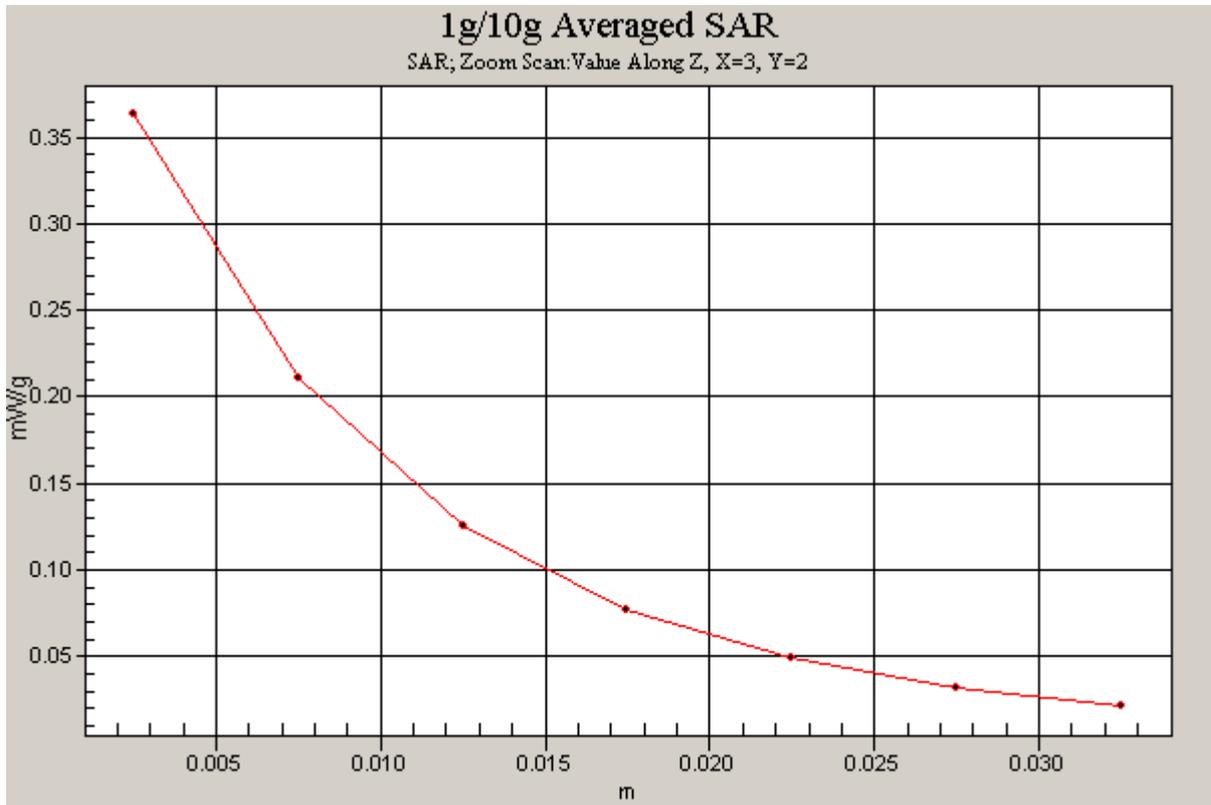


Figure 82 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position 2Channel 4233]

WCDMA Band V with BenQ Joybook R55V Test Position 2 Middle Frequency

Date/Time: 6/3/2009 6:51:06 PM

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.437 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.270 mW/g; SAR(10 g) = 0.160 mW/g

Maximum value of SAR (measured) = 0.342 mW/g

Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.7 V/m; Power Drift = 0.013 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

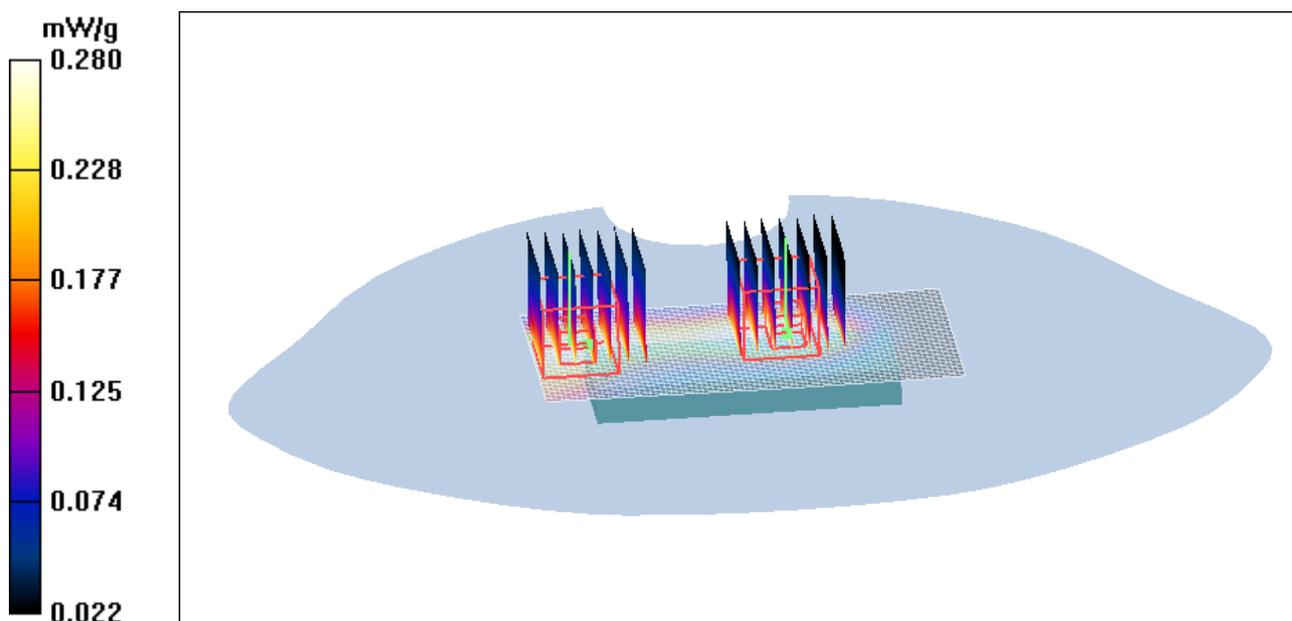


Figure 83 WCDMA Band V with BenQ Joybook R55V Test Position 2 Channel 4182

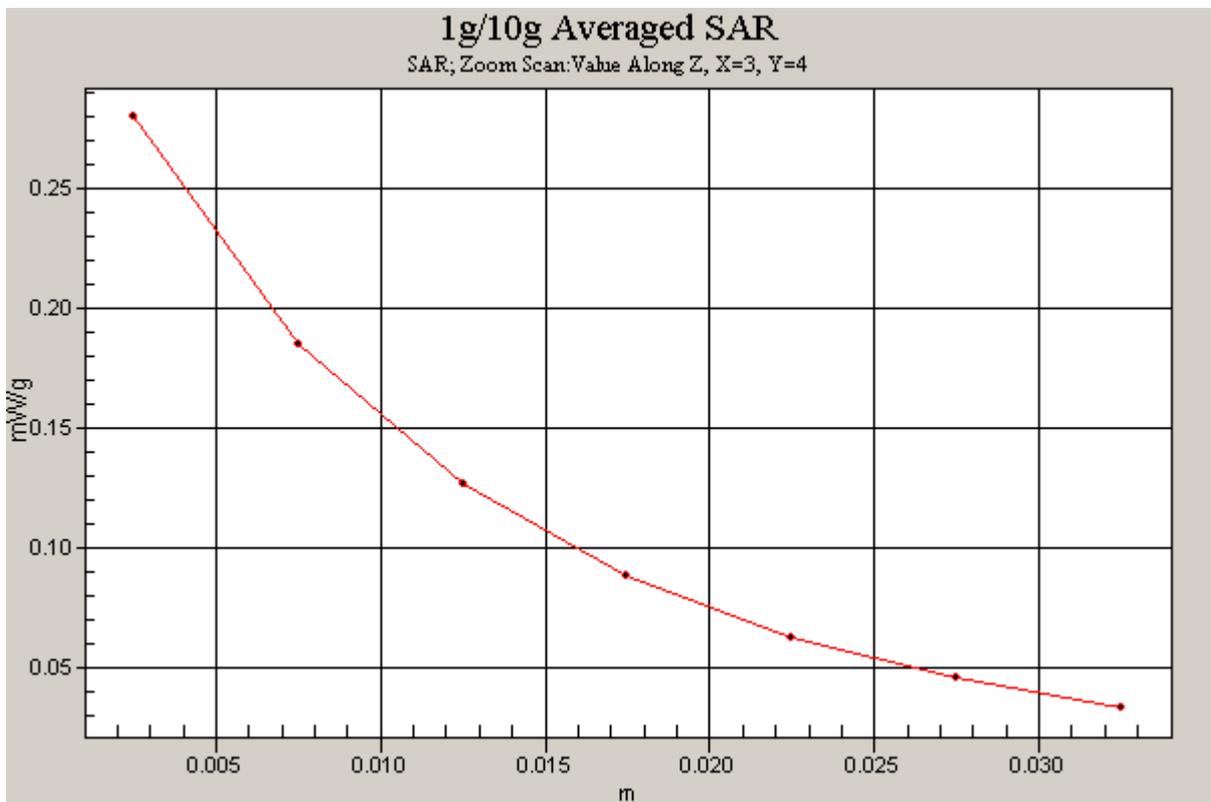
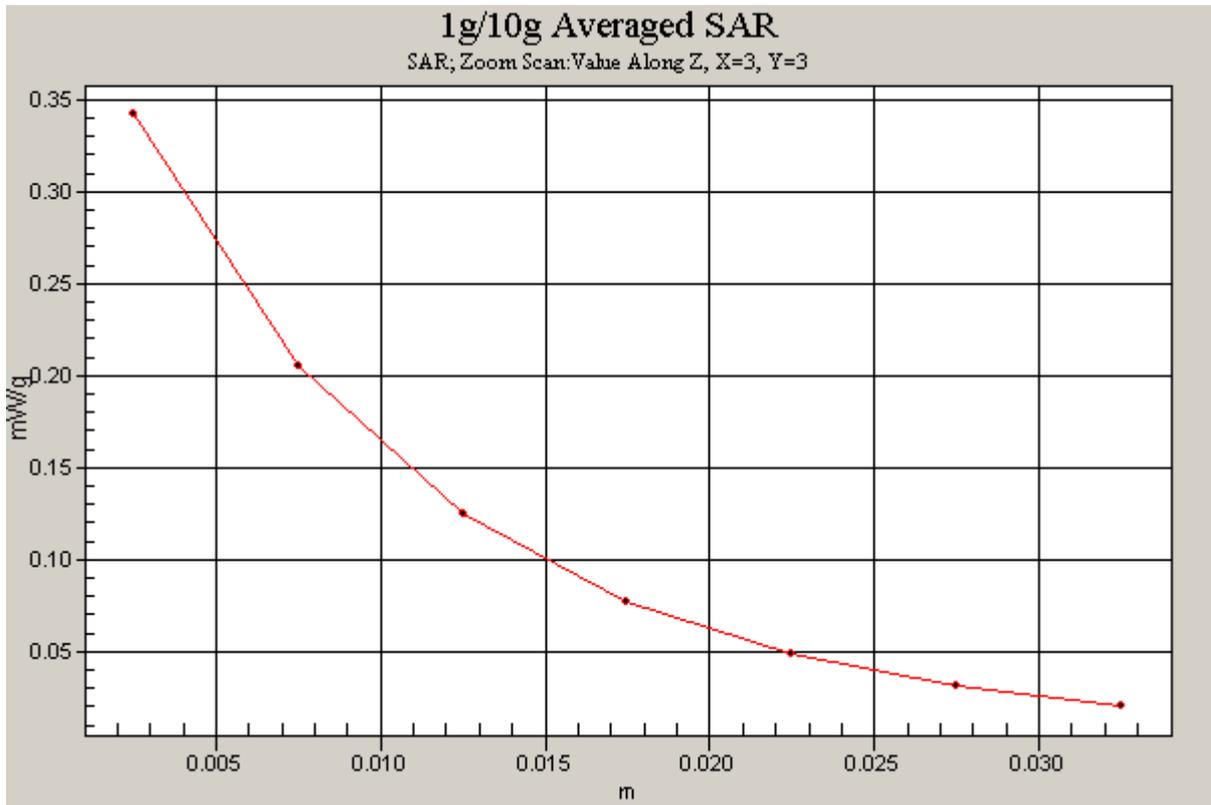


Figure 84 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position 2 Channel 4182]

WCDMA Band V with BenQ Joybook R55V Test Position 2 Low Frequency

Date/Time: 6/3/2009 9:58:47 PM

Communication System: WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.988$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 Low/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.226 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.093 mW/g

Maximum value of SAR (measured) = 0.193 mW/g

Test Position 2 Low/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

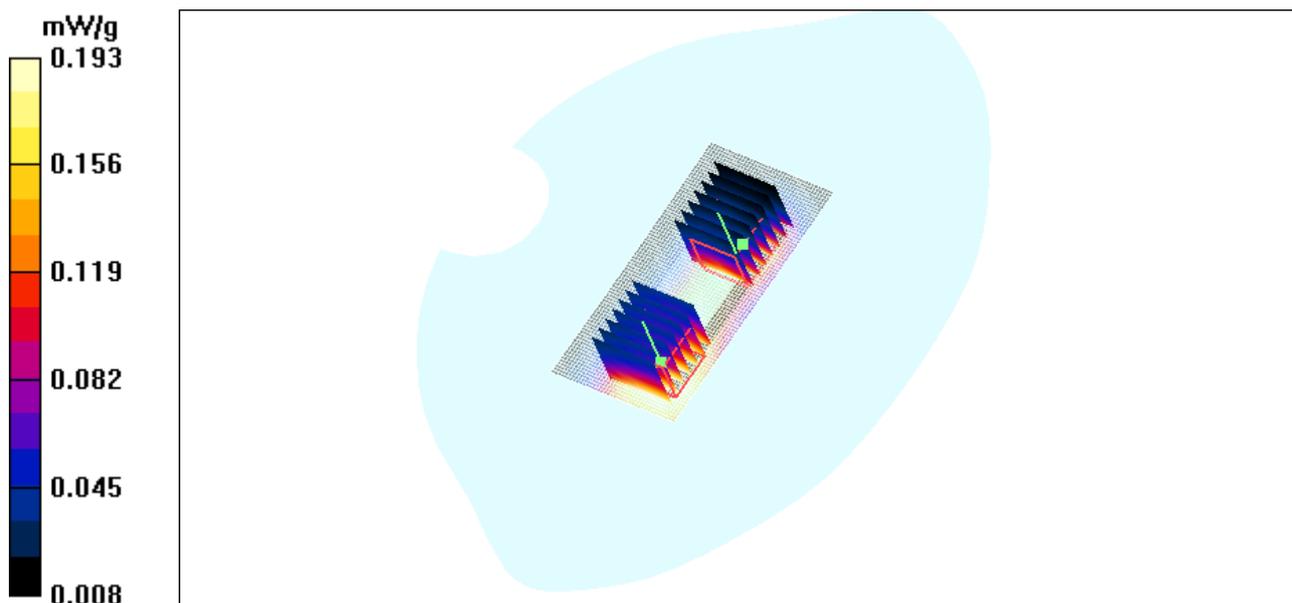


Figure 85 WCDMA Band V with BenQ Joybook R55V Test Position 2 Channel 4132

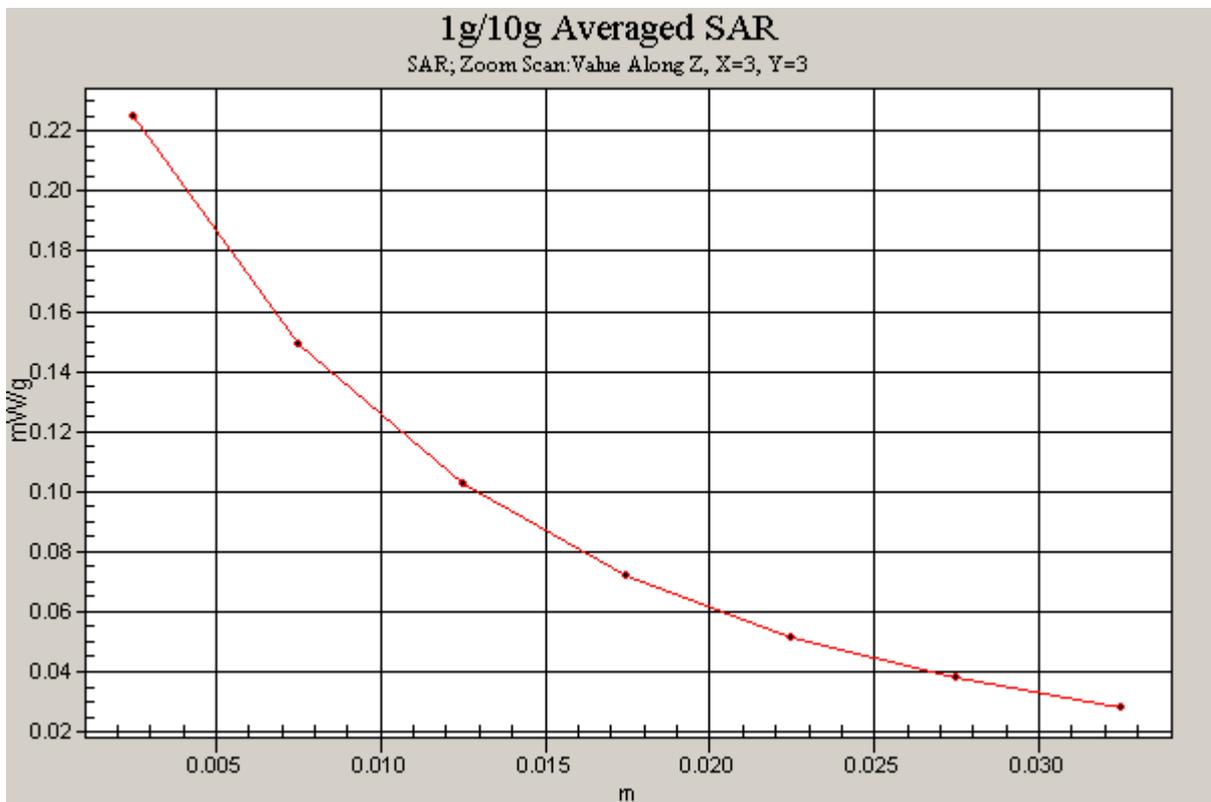
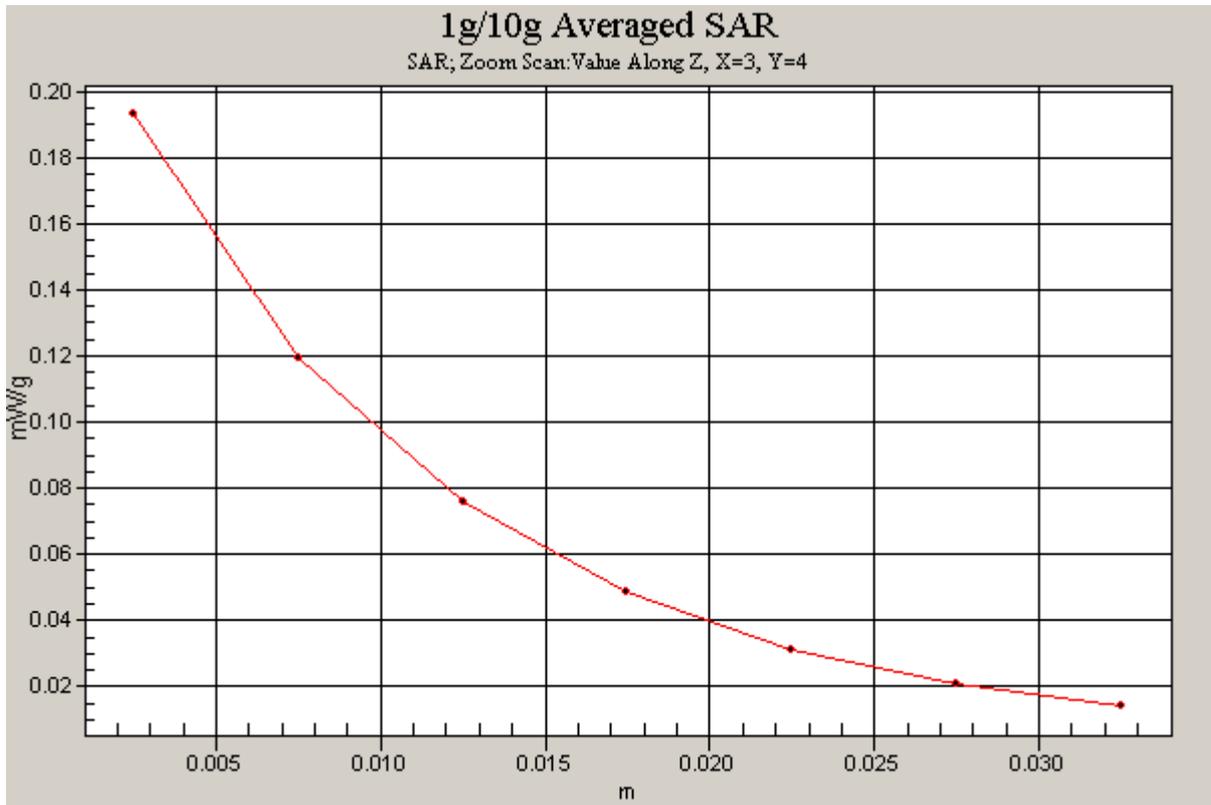


Figure 86 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position 2 Channel 4132]

WCDMA Band V with BenQ Joybook R55V Test Position 3 Middle Frequency

Date/Time: 6/3/2009 8:50:06 PM

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 3 Middle/Area Scan (41x41x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.210 mW/g

Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.834 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

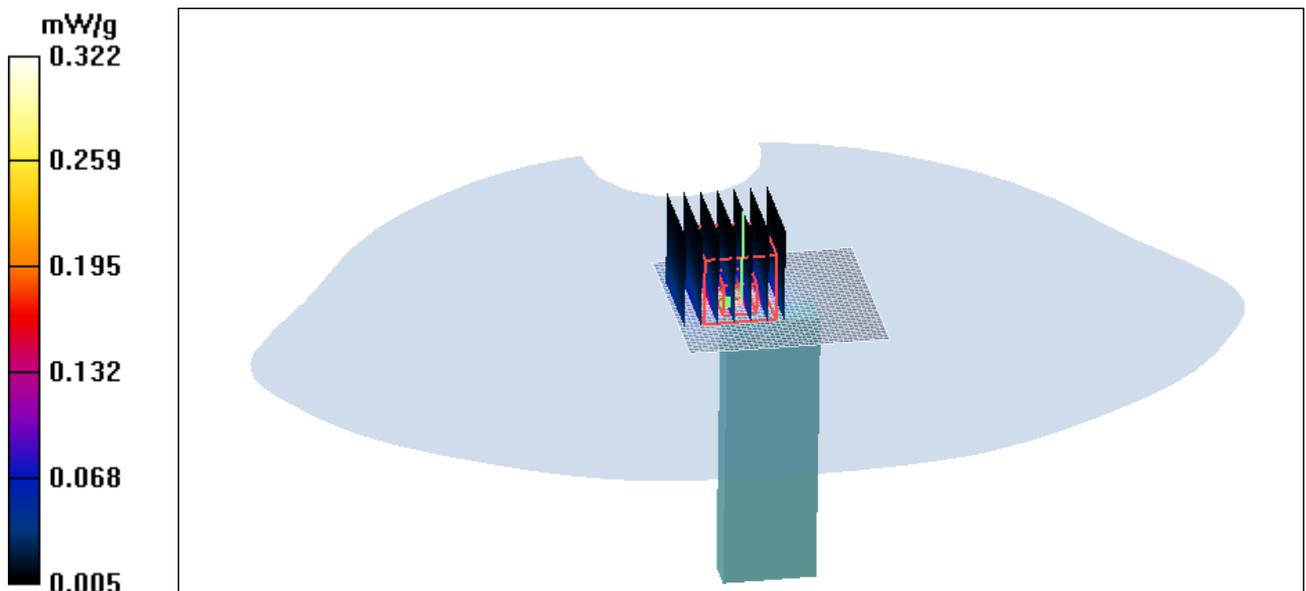


Figure 87 WCDMA Band V with BenQ Joybook R55V Test Position 3 Channel 4182

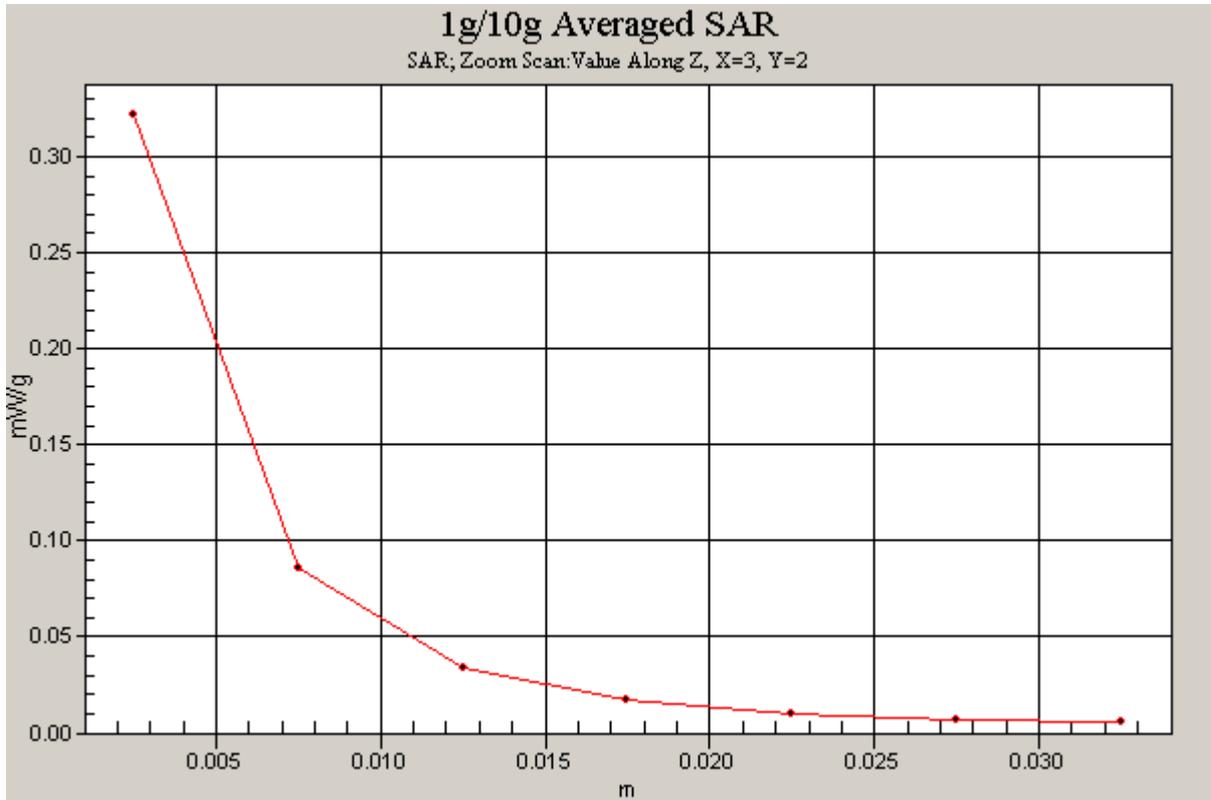


Figure 88 Z-Scan at power reference point [WCDMA Band V with BenQ Joybook R55V Test Position 3 Channel 4182]

WCDMA Band V with IBM T61 Test Position 4 Middle Frequency

Date/Time: 6/3/2009 8:06:09 PM

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 4 Middle/Area Scan (31x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.265 mW/g

Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 0.326 W/kg

SAR(1 g) = 0.211 mW/g; SAR(10 g) = 0.137 mW/g

Maximum value of SAR (measured) = 0.257 mW/g

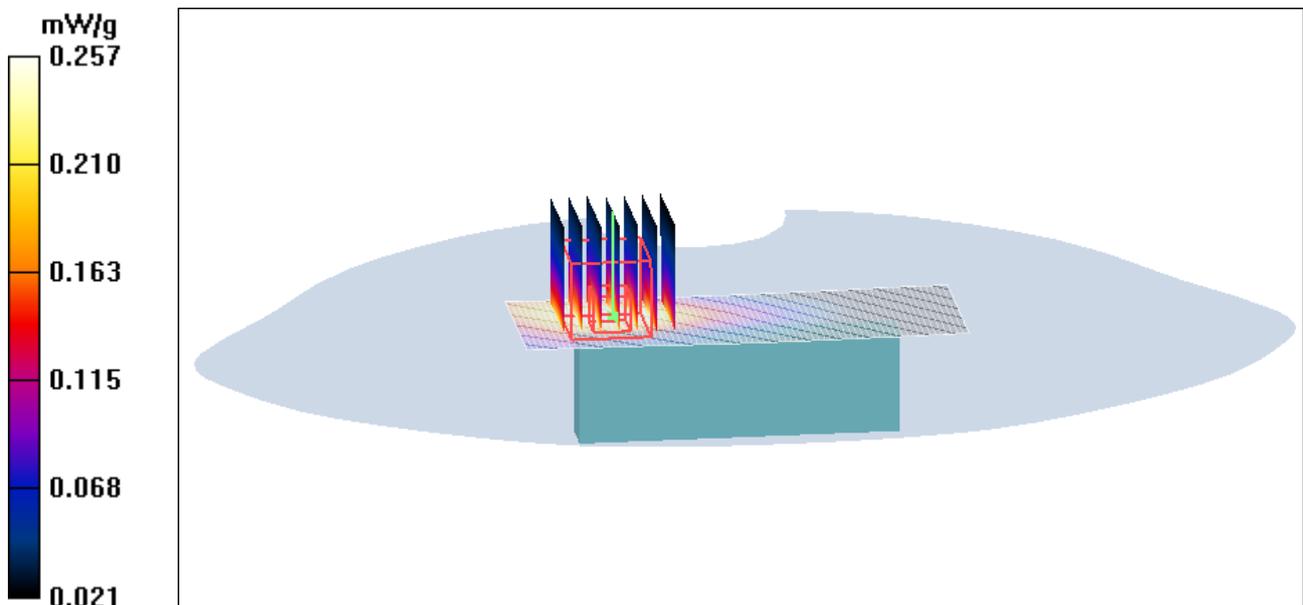


Figure 89 WCDMA Band V with IBM T61 Test Position 4 Channel 4182

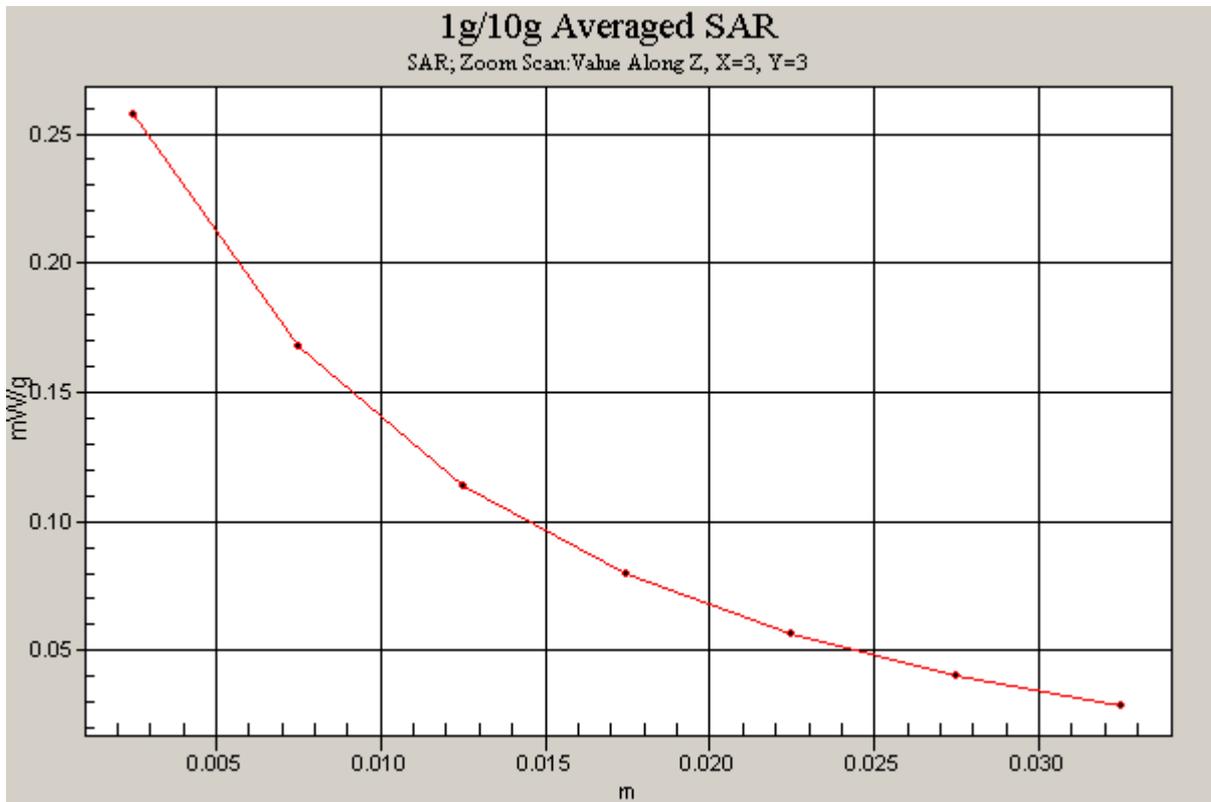


Figure 90 Z-Scan at power reference point [WCDMA Band V with IBM T61 Test Position 4 Channel 4182]

WCDMA Band V with IBM T61 Test Position 5 Middle Frequency

Date/Time: 6/3/2009 8:24:29 PM

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.999$ mho/m; $\epsilon_r = 55.9$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 5 Middle/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.244 mW/g

Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=5mm

Reference Value = 12.1 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.348 W/kg

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.140 mW/g

Maximum value of SAR (measured) = 0.274 mW/g

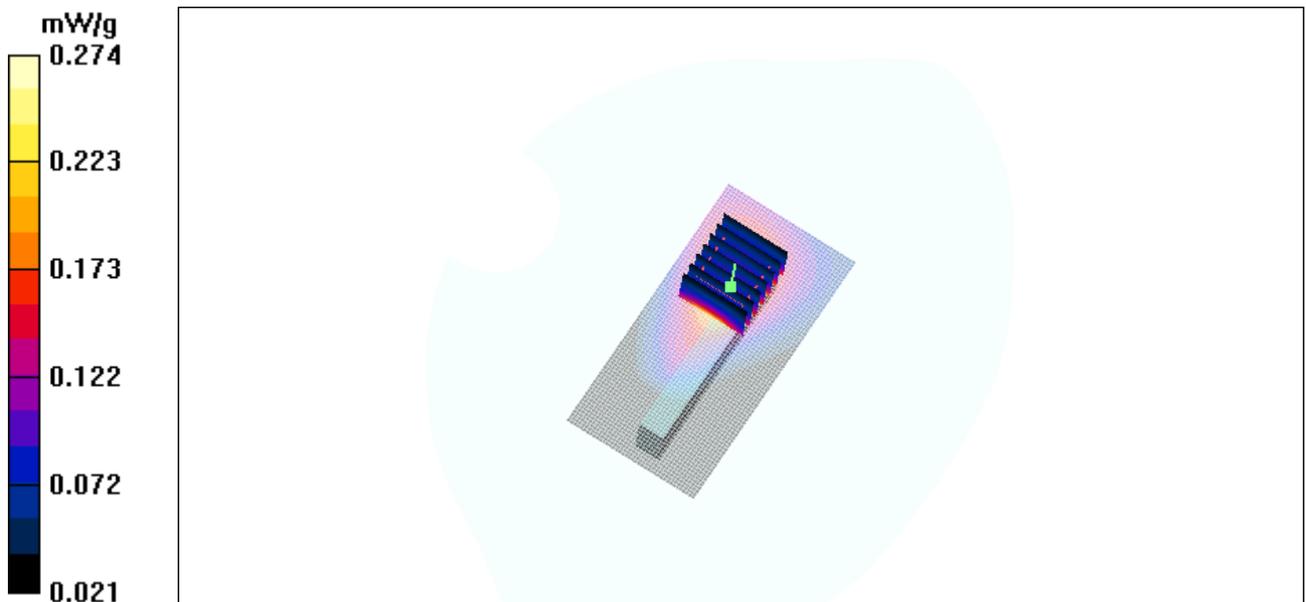


Figure 91 WCDMA Band V with IBM T61 Test Position 5 Channel 4182

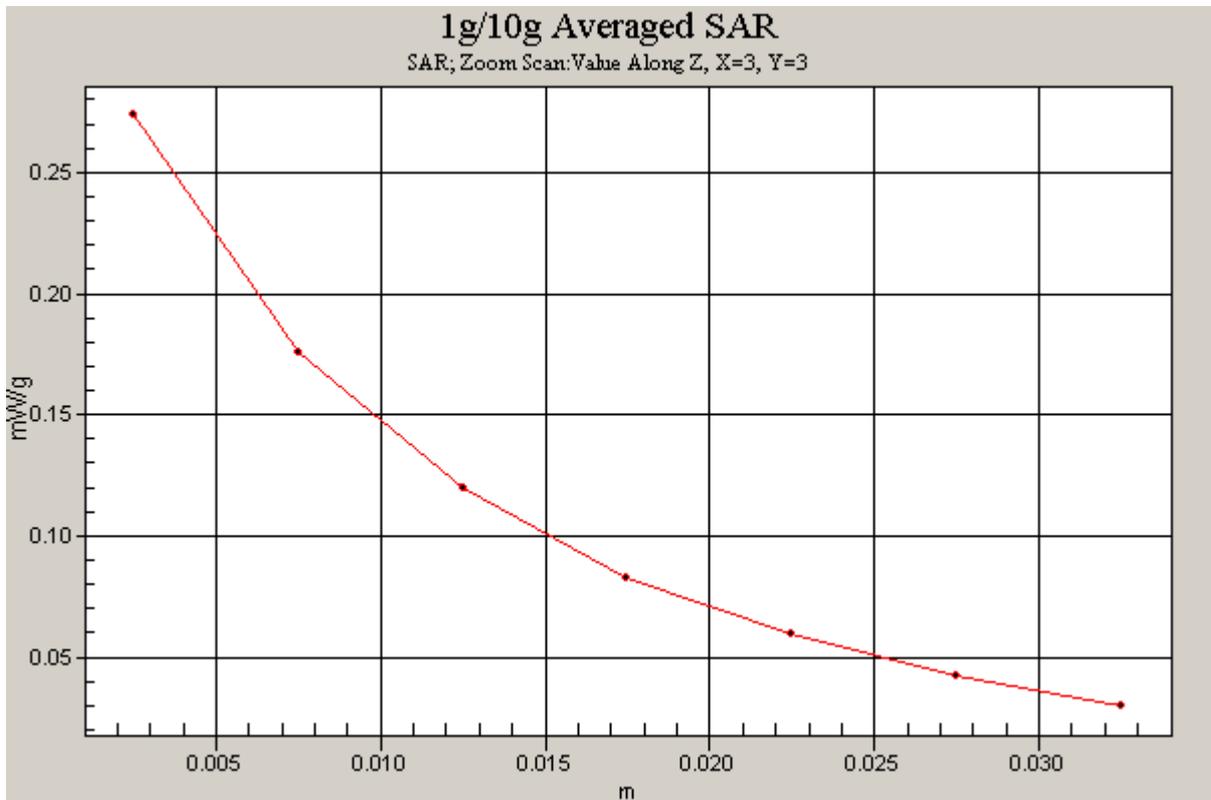


Figure 92 Z-Scan at power reference point [WCDMA Band V with IBM T61 Test Position 5 Channel 4182]

WCDMA Band V +HSDPA with BenQ Joybook R55V Test Position 2 High Frequency

Date/Time: 6/3/2009 9:22:20 PM

Communication System: WCDMA Band V+HSDPA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 847$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 55.8$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: Flat Section

DASY4 Configuration:

Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008

Electronics: DAE4 Sn452; Calibrated: 11/18/2008

Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Test Position 2 High/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.403 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.356 mW/g

Test Position 2 High/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.152 mW/g

Maximum value of SAR (measured) = 0.272 mW/g

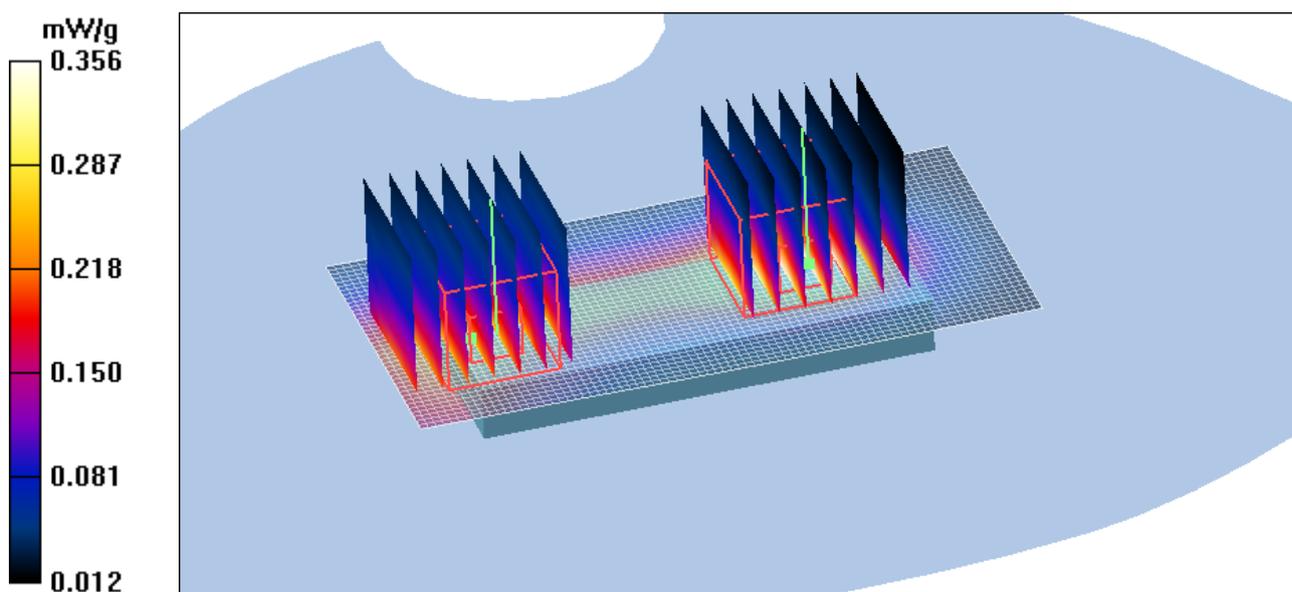


Figure 93 WCDMA Band V+HSDPA with BenQ Joybook R55V Test Position 2 Channel 4233

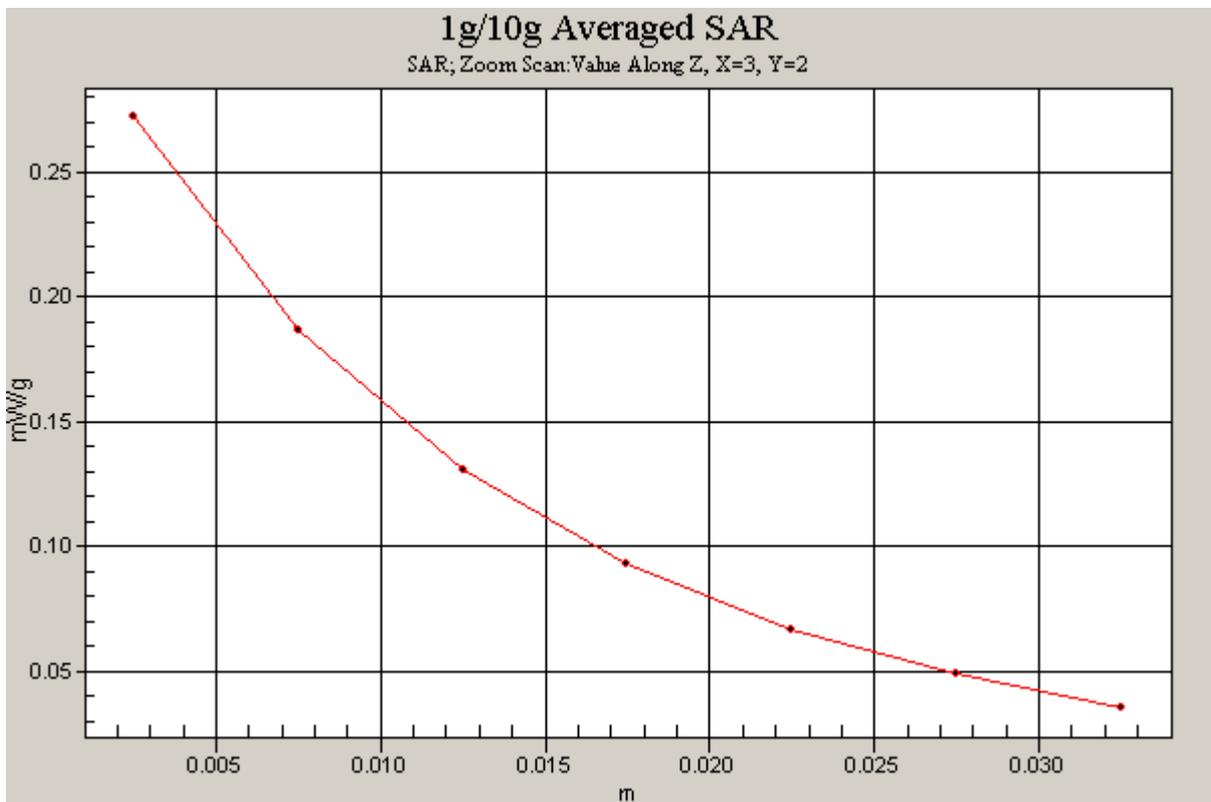
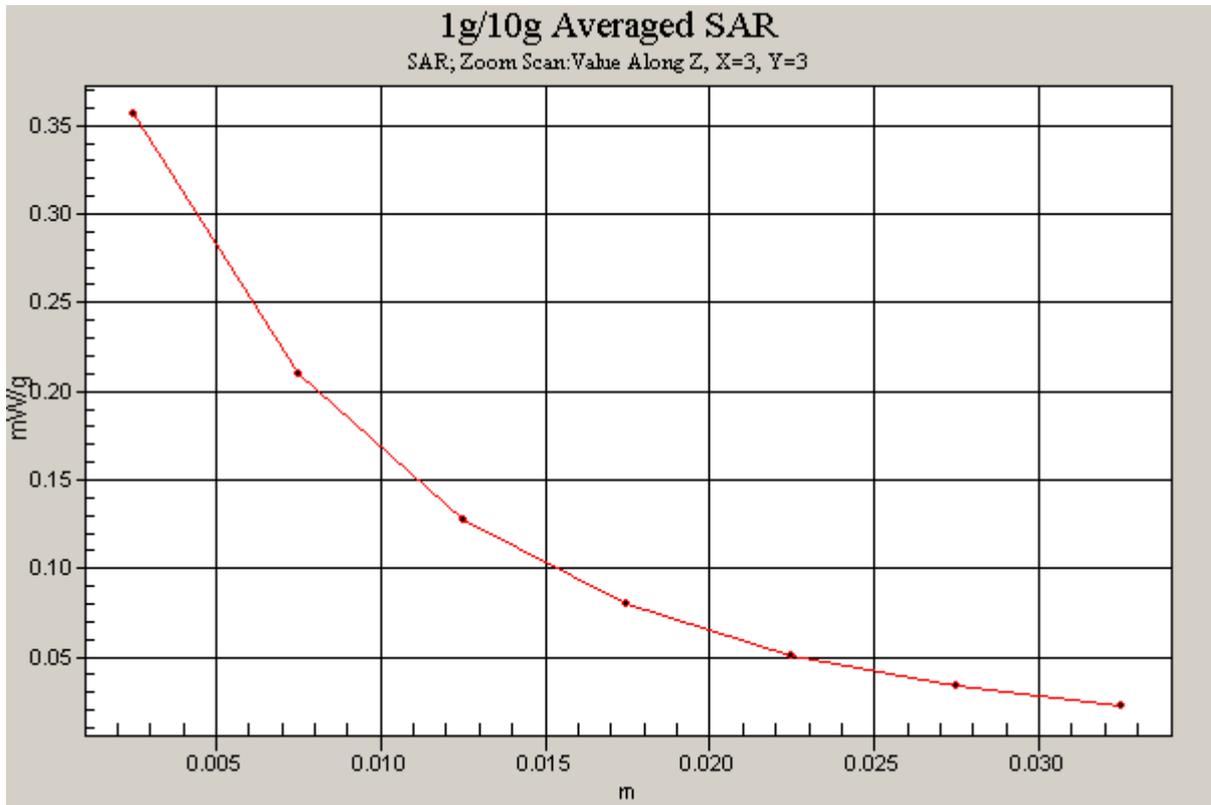


Figure 94 Z-Scan at power reference point [WCDMA Band V+HSDPA with BenQ Joybook R55V
Test Position 2 Channel 4233]