

0 dB = 0.080mW/g

#09 WCDMA V_RMC12.2K_Right Cheek_Ch4182

DUT: D2_6114

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130201 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.882$ mho/m; $\epsilon_r =$

40.858 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.526 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.614 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.349 mW/g

Maximum value of SAR (measured) = 0.523 mW/g

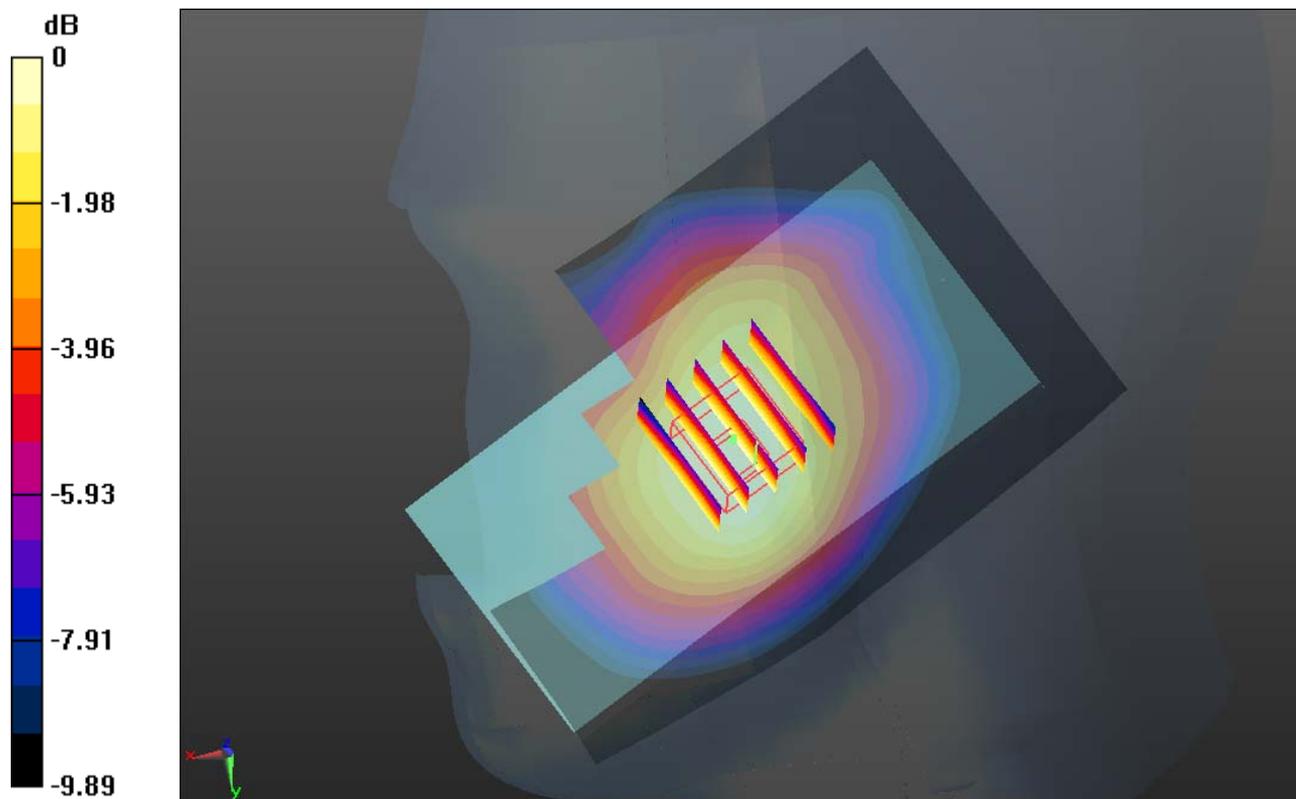

0 dB = 0.520mW/g

#10 WCDMA V_RMC12.2K_Right Tilted_Ch4182

DUT: D2_6114

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130201 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.882$ mho/m; $\epsilon_r =$

40.858; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.395 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.758 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.264 mW/g

Maximum value of SAR (measured) = 0.398 mW/g

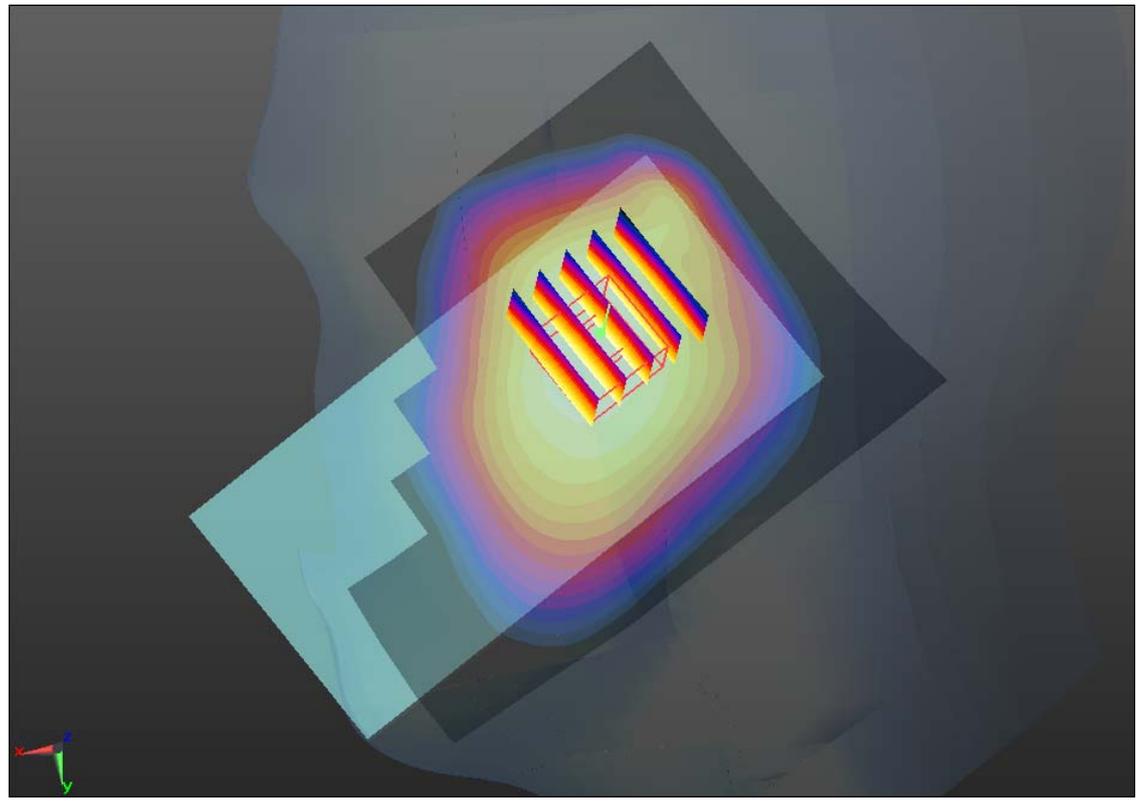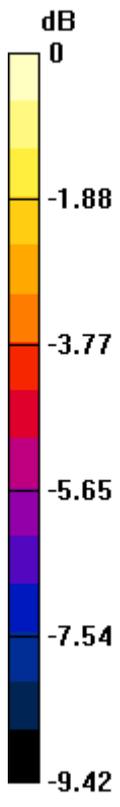

0 dB = 0.400mW/g

#11 WCDMA V_RMC12.2K_Left Cheek_Ch4182

DUT: D2_6114

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130201 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.882$ mho/m; $\epsilon_r =$

40.858; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.514 mW/g



Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.568 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.560 W/kg

SAR(1 g) = 0.449 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.512 mW/g

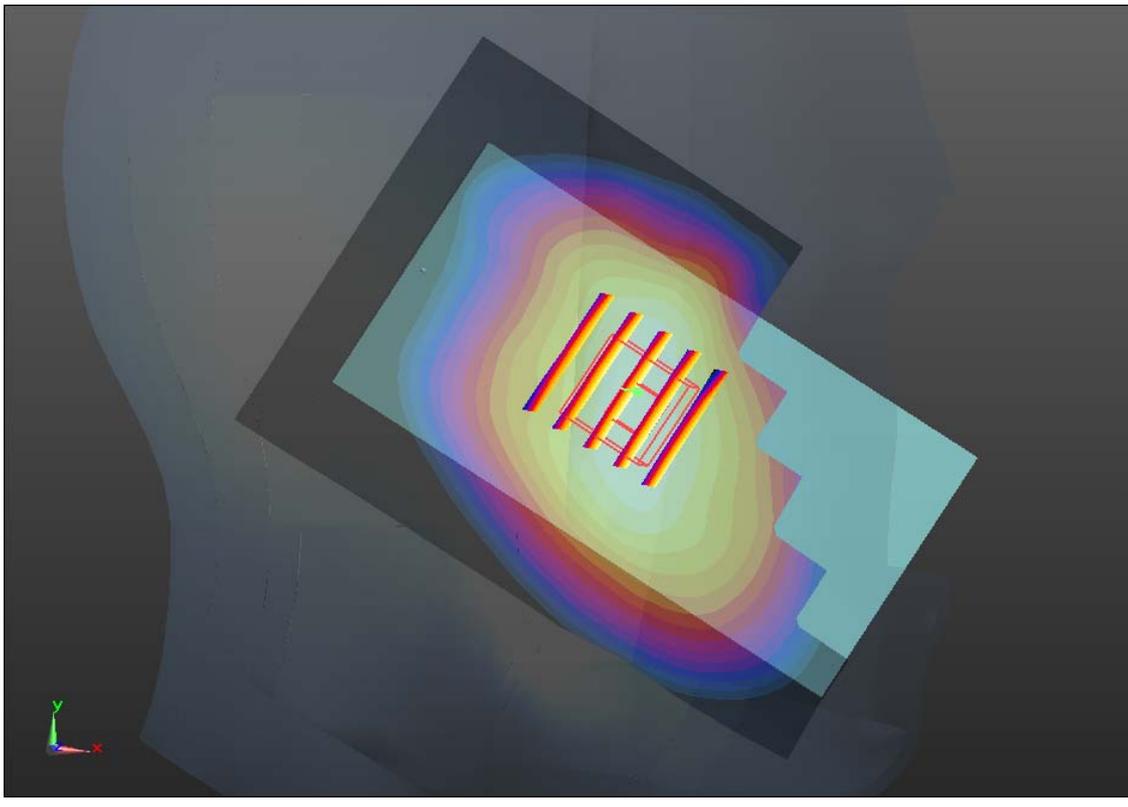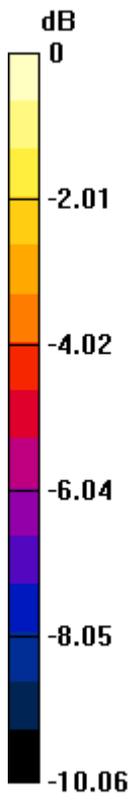

0 dB = 0.510mW/g

#12 WCDMA V_RMC12.2K_Left Tilted_Ch4182

DUT: D2_6114

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130201 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.882$ mho/m; $\epsilon_r =$

40.858 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(8.74, 8.74, 8.74); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch4182/Area Scan (71x111x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.365 mW/g


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.658 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.363 mW/g

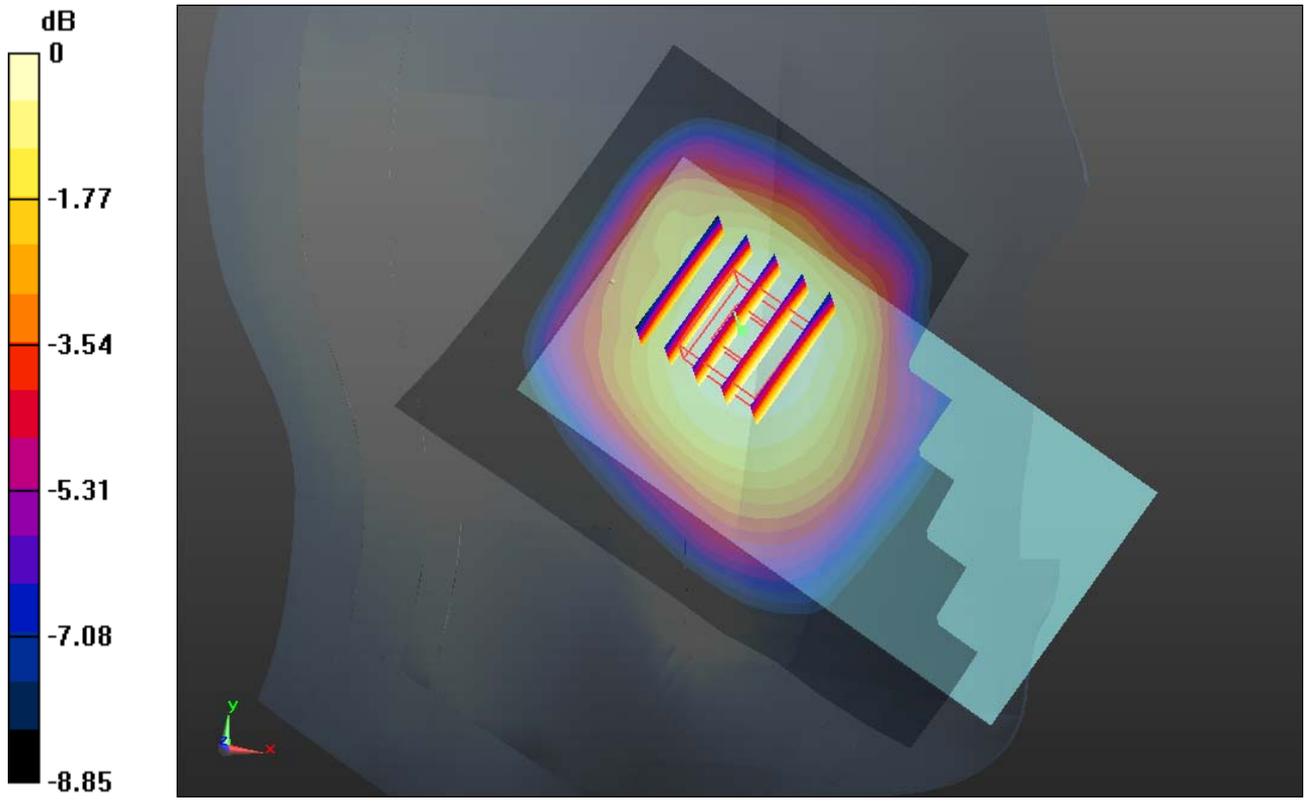

0 dB = 0.360mW/g

#13 802.11b_Right Cheek_Ch11

DUT: D2_6114

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130217 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.842$ mho/m; $\epsilon_r =$

40.039; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.469 mW/g



Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.233 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.120 mW/g

Maximum value of SAR (measured) = 0.410 mW/g

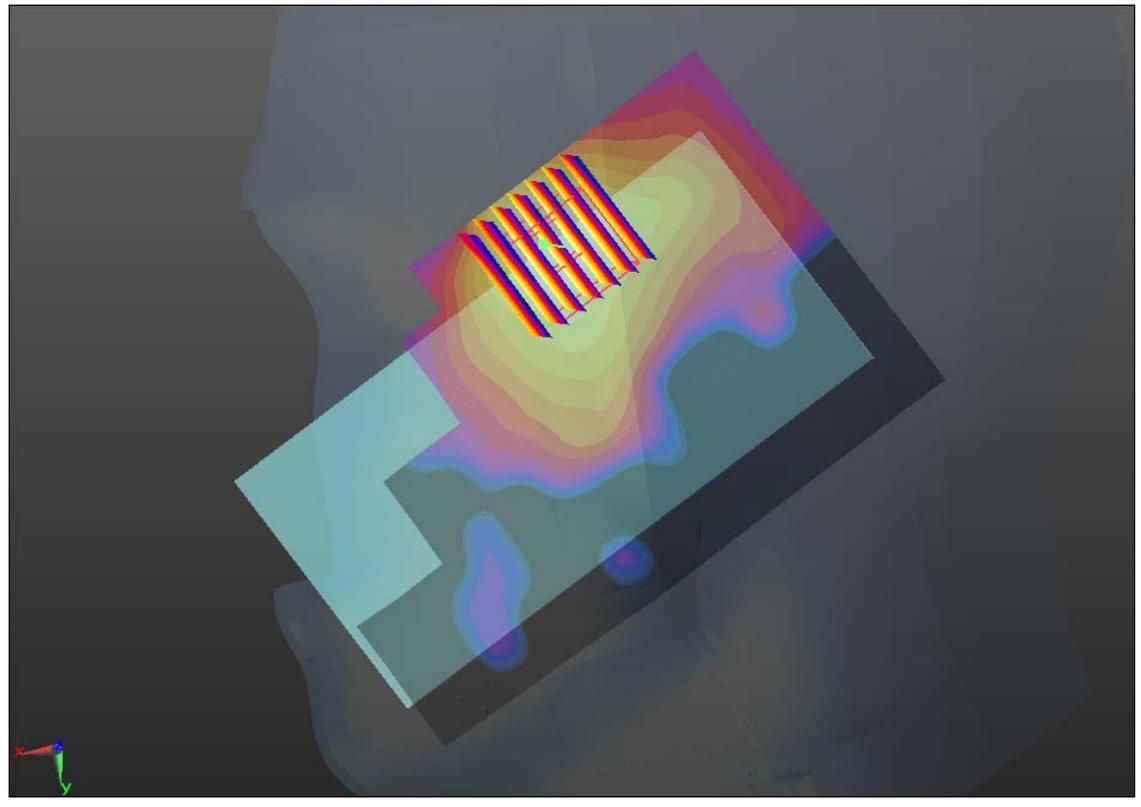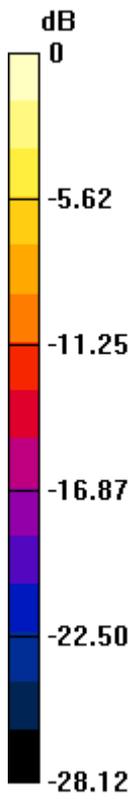

0 dB = 0.410mW/g

#14 802.11b_Right Tilted_Ch11

DUT: D2_6114

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130217 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.842$ mho/m; $\epsilon_r =$

40.039; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.109 mW/g

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.226 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.113 mW/g



Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.226 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.161 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.116 mW/g

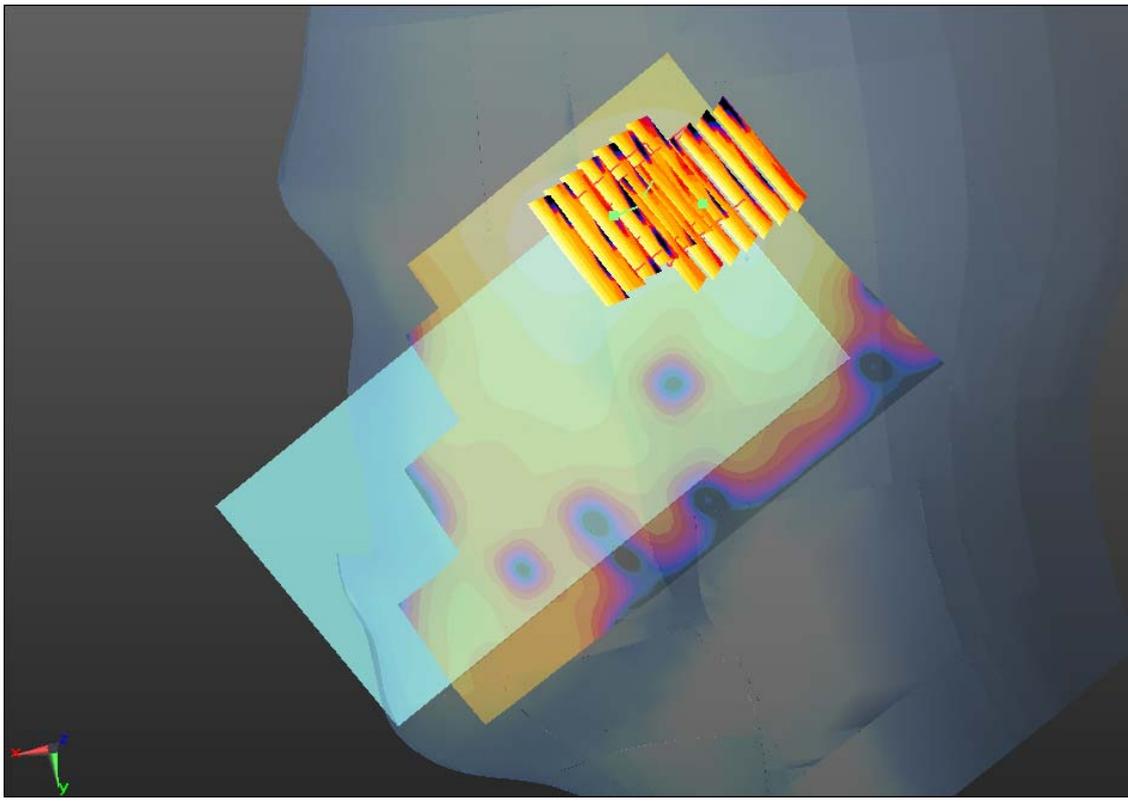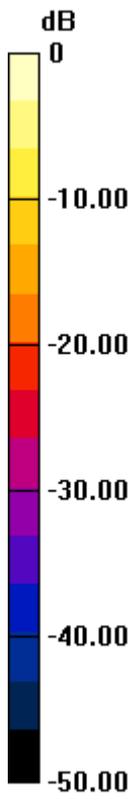

0 dB = 0.120mW/g

#15 802.11b_Left Cheek_Ch11

DUT: D2_6114

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130217 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.842$ mho/m; $\epsilon_r =$

40.039; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.404 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.990 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.439 mW/g

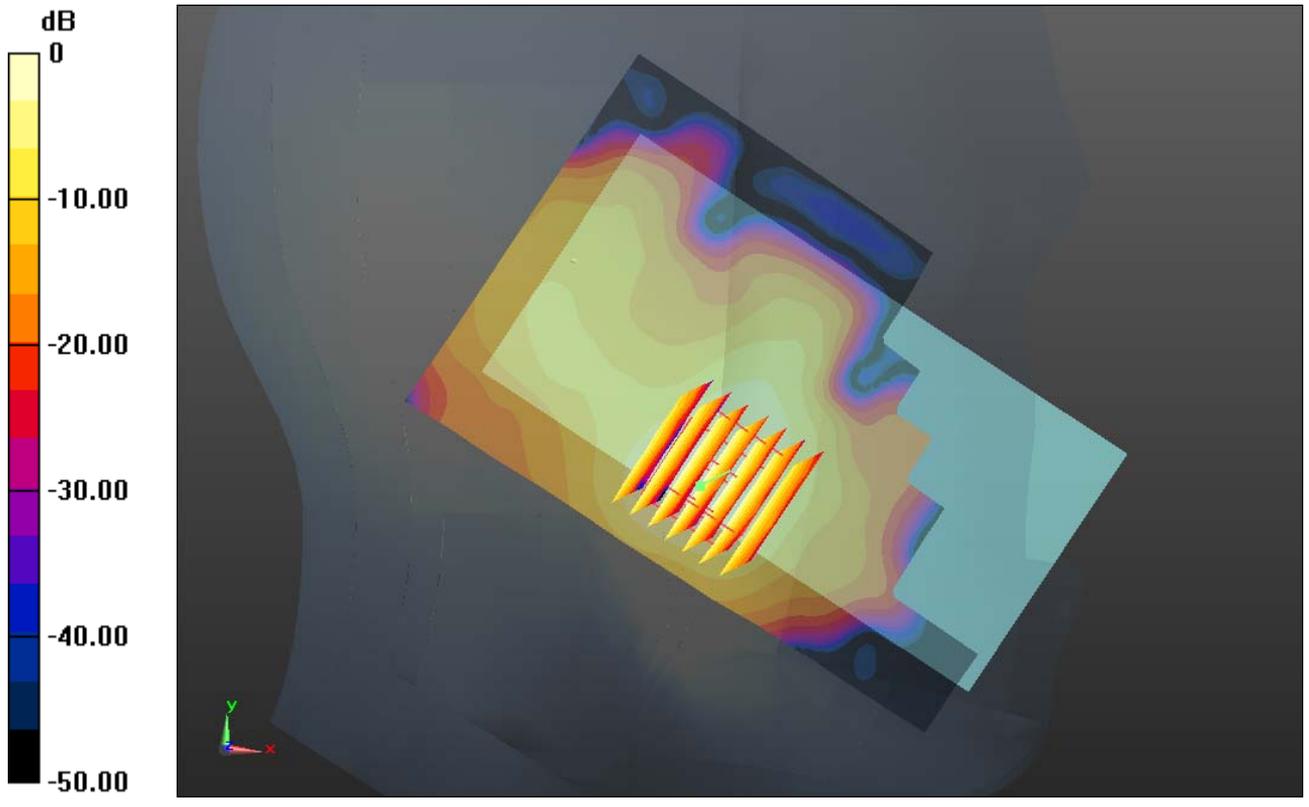

0 dB = 0.440mW/g

#16 802.11b_Left Tilted_Ch11

DUT: D2_6114

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130217 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.842$ mho/m; $\epsilon_r =$

40.039; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.87, 6.87, 6.87); Calibrated: 2012-6-20
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM1; Type: SAM; Serial: TP-1479
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch11/Area Scan (81x131x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.084 mW/g

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.457 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.086 mW/g


Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.457 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.038 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

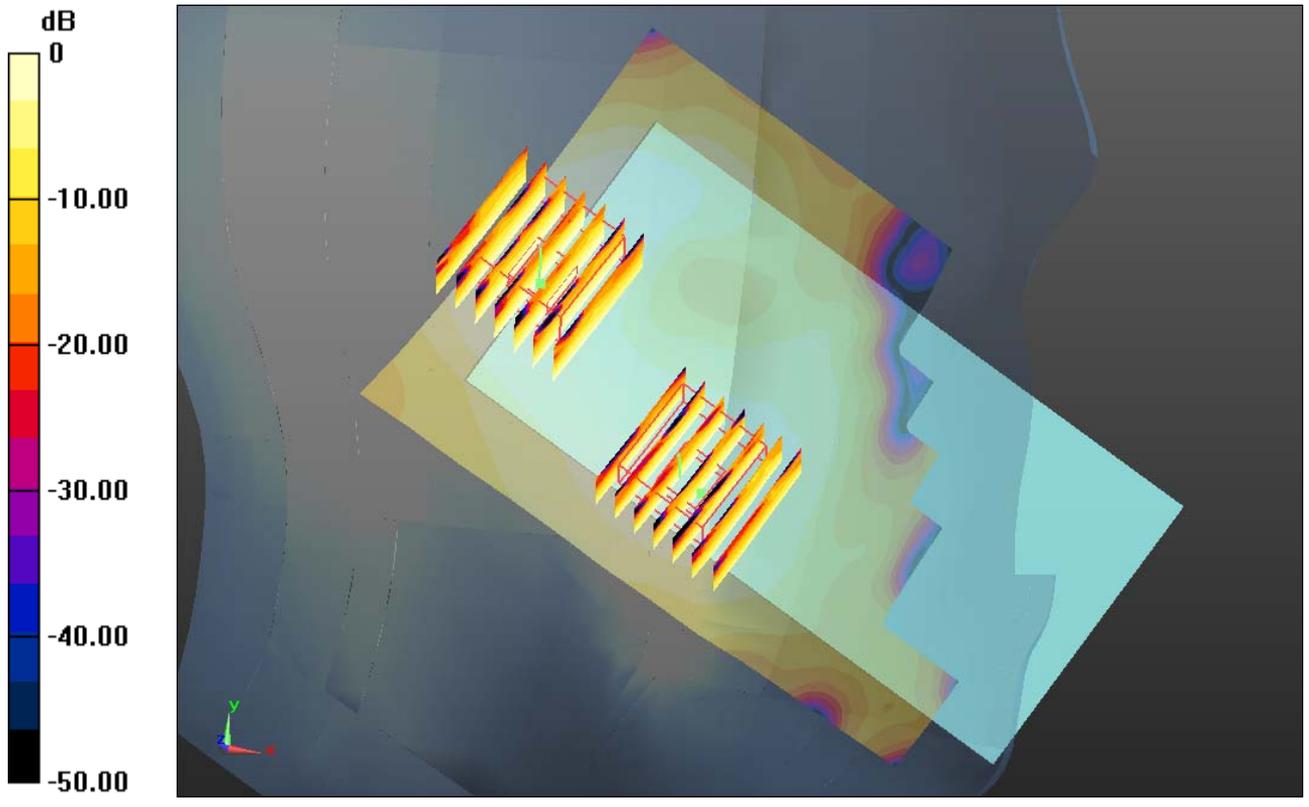

0 dB = 0.060mW/g

#17 802.11a_Right Cheek_Ch48

DUT: D2_6114

Communication System: WIFI; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: HSL_5000_130217 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.86$ mho/m; $\epsilon_r =$

35.386 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.11, 5.11, 5.11); Calibrated: 2012-6-20

- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5

- Phantom: SAM2; Type: SAM; Serial: TP-1477

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch48/Area Scan (111x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.191 mW/g



Ch48/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.017 mW/g

Maximum value of SAR (measured) = 0.133 mW/g

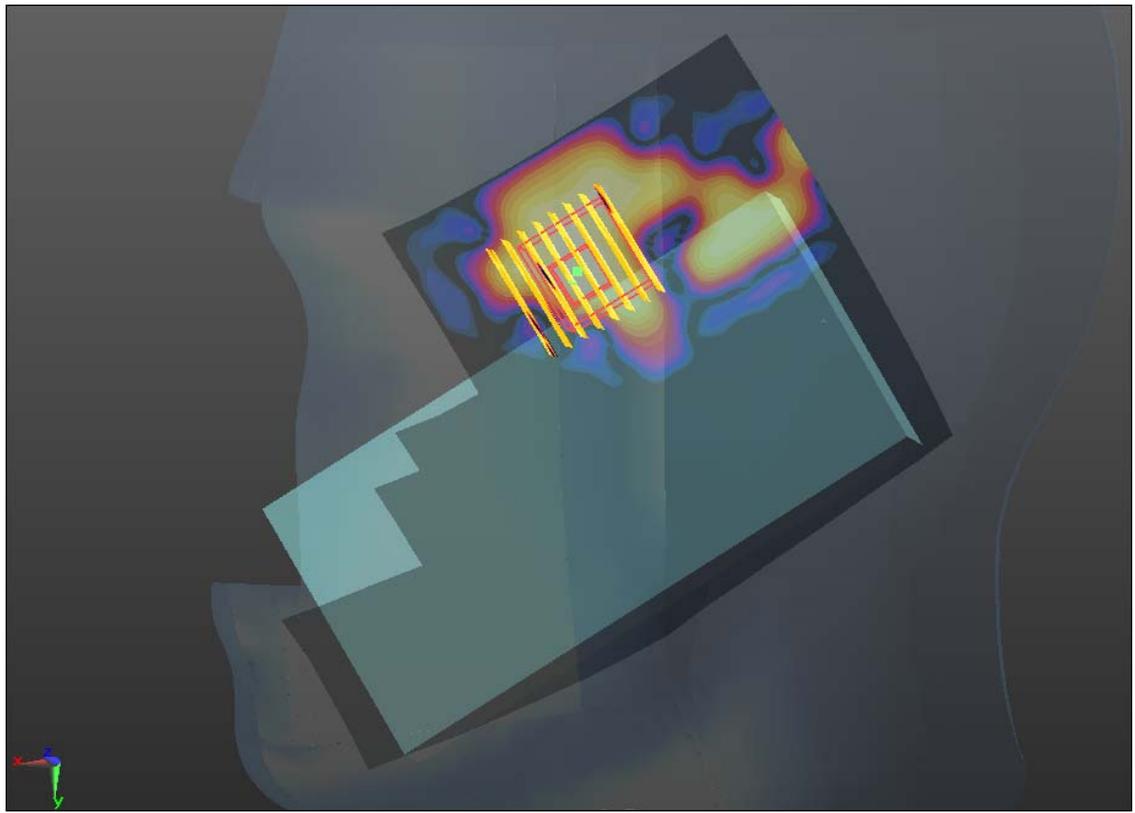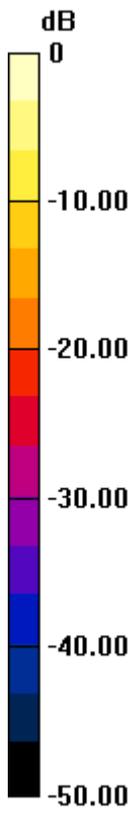

0 dB = 0.130mW/g

#18 802.11a_Right Tilted_Ch48

DUT: D2_6114

Communication System: WIFI; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: HSL_5000_130217 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.86$ mho/m; $\epsilon_r =$

35.386 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.11, 5.11, 5.11); Calibrated: 2012-6-20

- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5

- Phantom: SAM2; Type: SAM; Serial: TP-1477

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch48/Area Scan (111x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.091 mW/g



Ch48/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.0078 mW/g

Maximum value of SAR (measured) = 0.080 mW/g

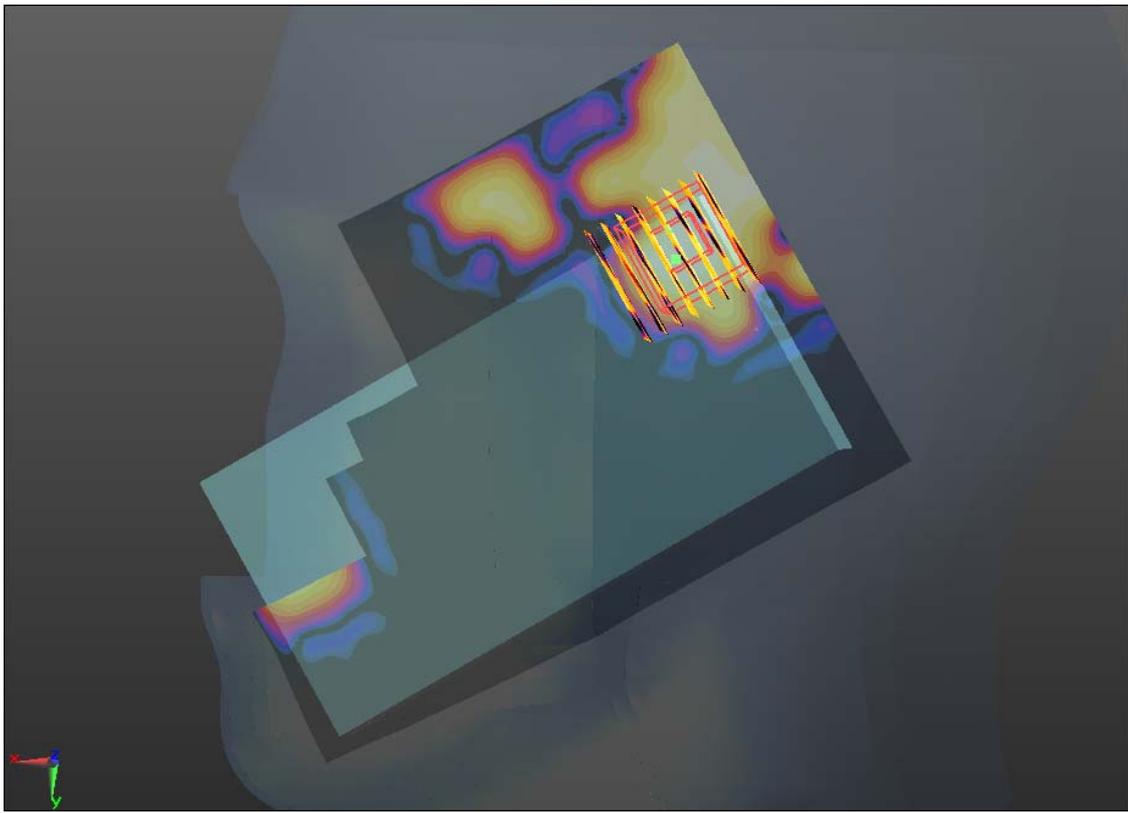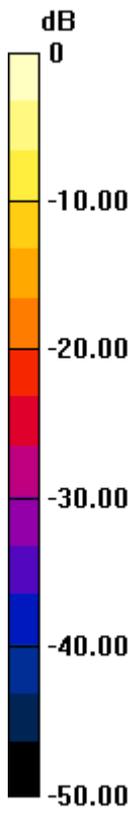

0 dB = 0.080mW/g

#19 802.11a_Left Cheek_Ch48

DUT: D2_6114

Communication System: WIFI; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: HSL_5000_130217 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.86$ mho/m; $\epsilon_r =$

35.386 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.11, 5.11, 5.11); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch48/Area Scan (101x171x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.245 mW/g

Ch48/Zoom Scan (8x8x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.246 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.00964 mW/g

Maximum value of SAR (measured) = 0.100 mW/g


Ch48/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.246 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.0091 mW/g

Maximum value of SAR (measured) = 0.068 mW/g

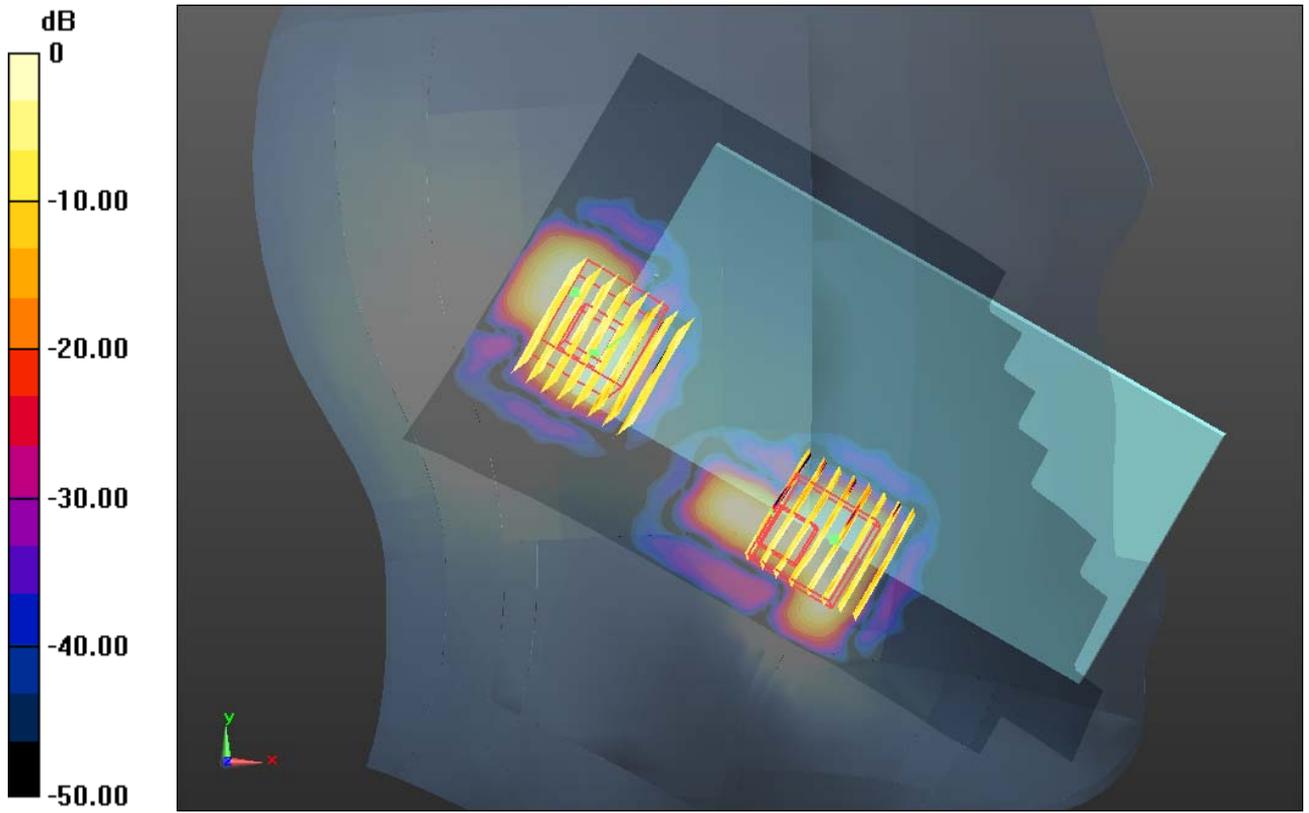

0 dB = 0.070mW/g

#20 802.11a_Left Tilted_Ch48

DUT: D2_6114

Communication System: WIFI; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: HSL_5000_130217 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.86$ mho/m; $\epsilon_r =$

35.386 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.11, 5.11, 5.11); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch48/Area Scan (101x181x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.141 mW/g



Ch48/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.00807 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

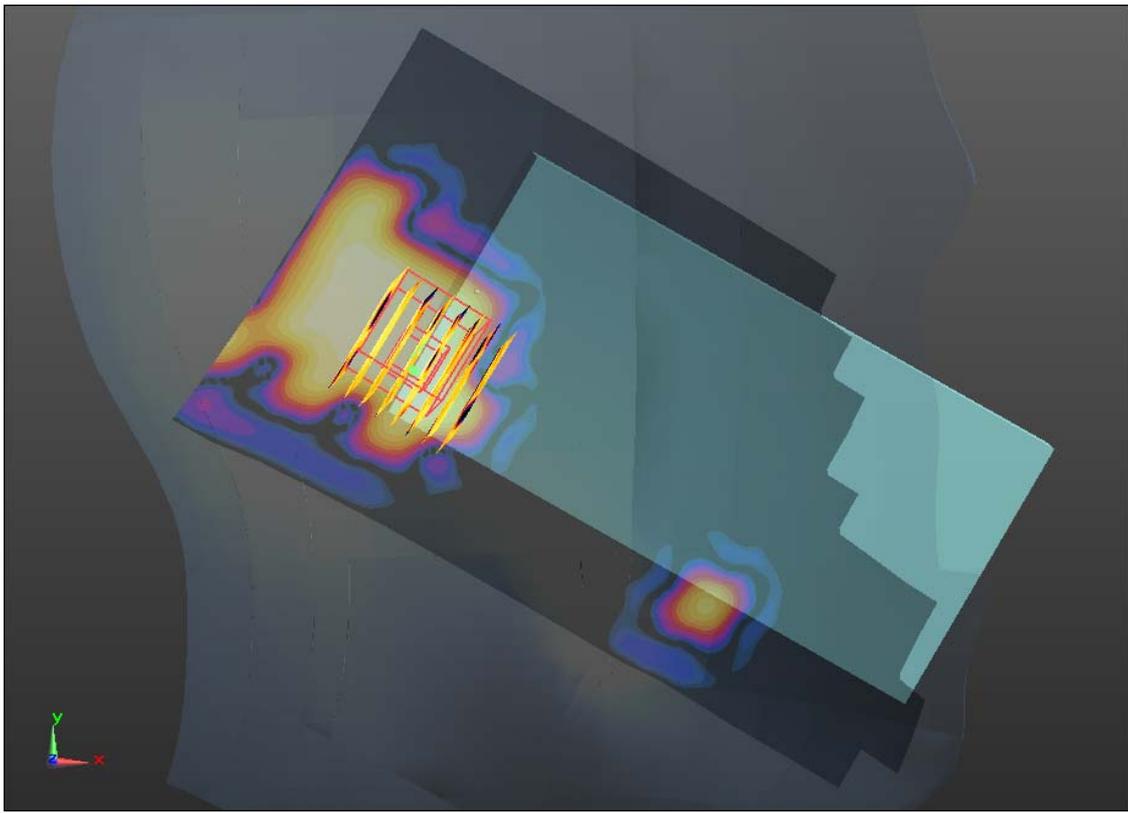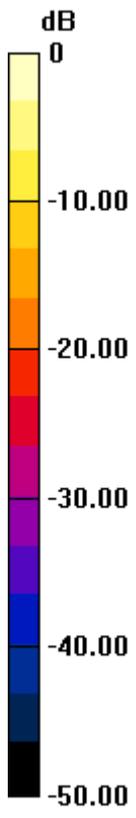

0 dB = 0.070mW/g

#21 802.11a_Right Cheek_Ch56

DUT: D2_6114

Communication System: WIFI; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: HSL_5000_130217 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.901$ mho/m; $\epsilon_r =$

35.335 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.91, 4.91, 4.91); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch56/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.257 mW/g



Ch56/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.116 mW/g

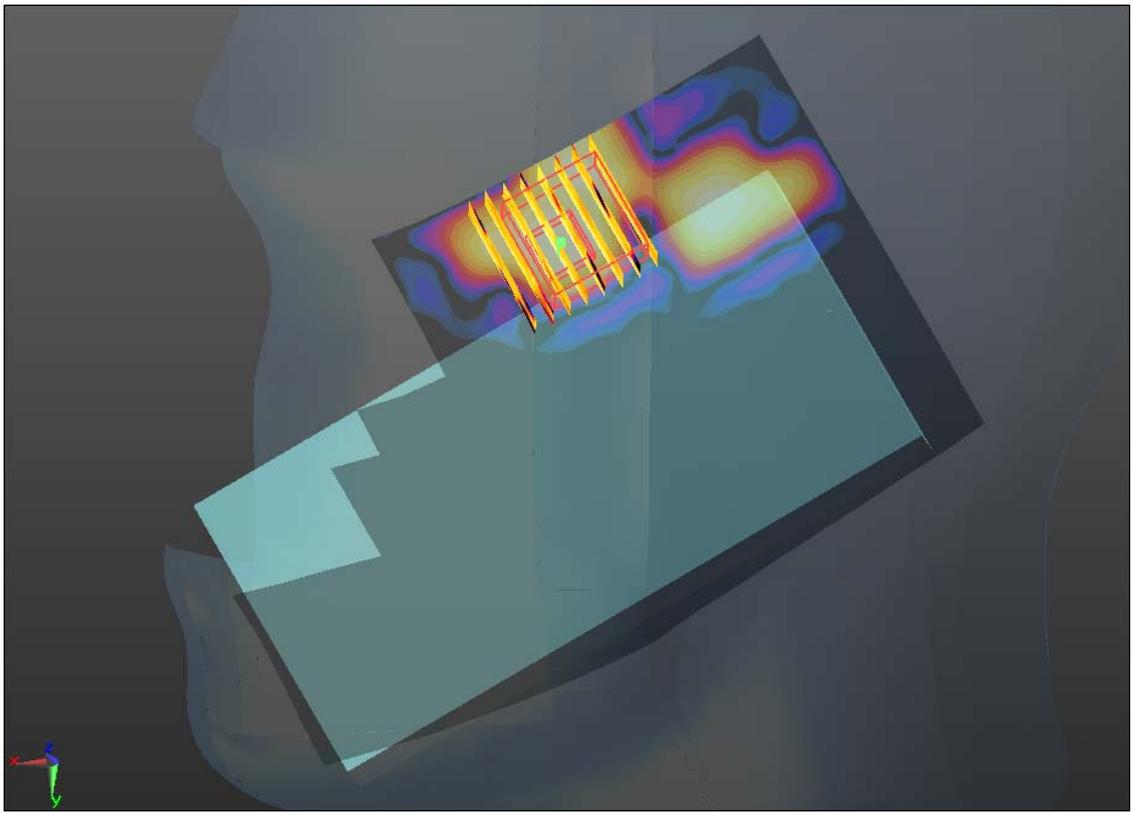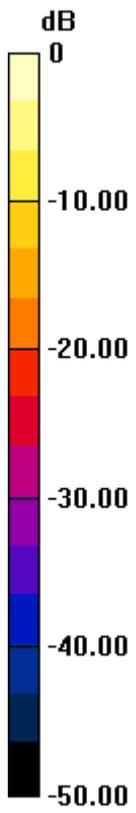

0 dB = 0.120mW/g

#22 802.11a_Right Tilted_Ch56

DUT: D2_6114

Communication System: WIFI; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: HSL_5000_130217 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.901$ mho/m; $\epsilon_r =$

35.335 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.91, 4.91, 4.91); Calibrated: 2012-6-20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5
- Phantom: SAM2; Type: SAM; Serial: TP-1477
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch56/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.132 mW/g



Ch56/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.174 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.00996 mW/g

Maximum value of SAR (measured) = 0.093 mW/g

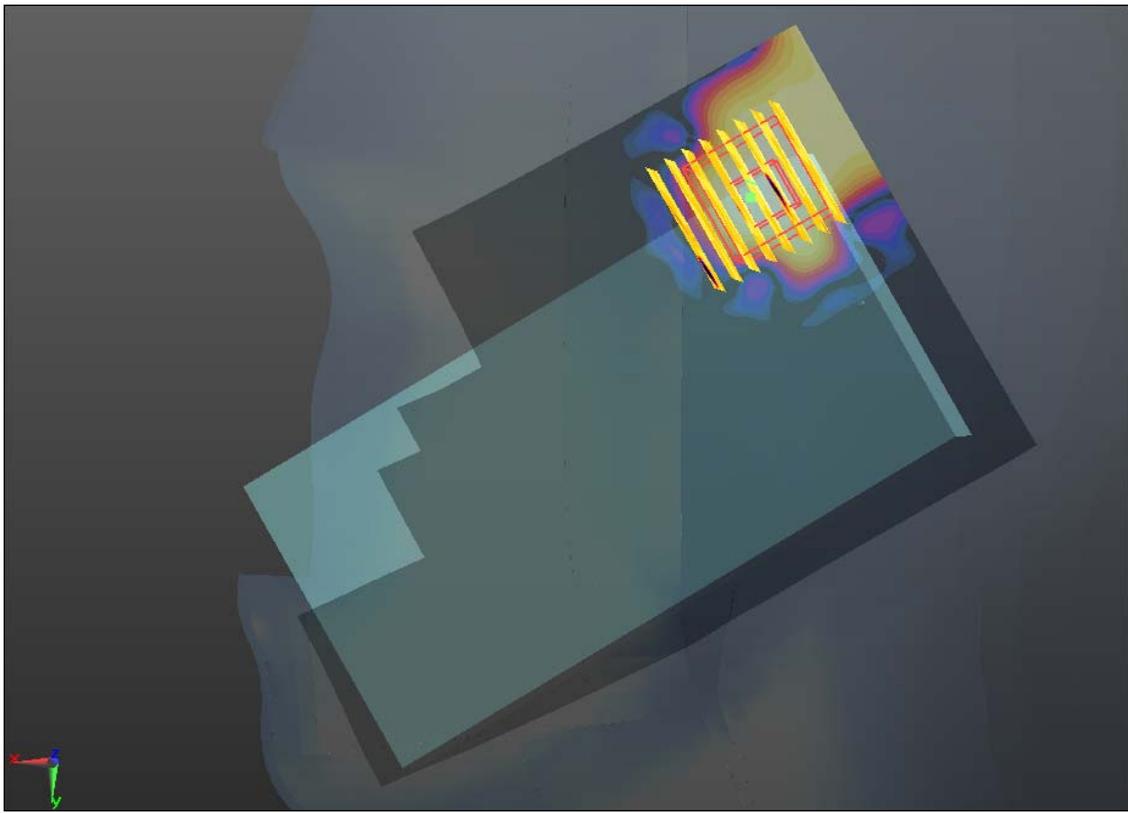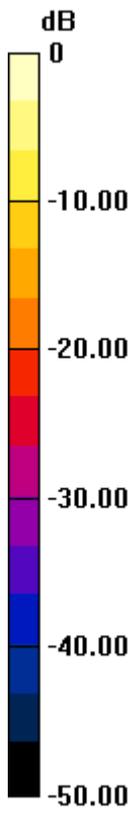

0 dB = 0.090mW/g

#23 802.11a_Left Cheek_Ch64

DUT: D2_6114

Communication System: WIFI; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: HSL_5000_130217 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.901$ mho/m; $\epsilon_r =$

35.335 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(4.91, 4.91, 4.91); Calibrated: 2012-6-20

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1210; Calibrated: 2012-12-5

- Phantom: SAM2; Type: SAM; Serial: TP-1477

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.4.5 (3634)

Ch56/Area Scan (101x161x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.146 mW/g

Ch56/Zoom Scan (8x8x7)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.00679 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

Ch56/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00373 mW/g

Maximum value of SAR (measured) = 0.039 mW/g