



Appendix B. SAR Measurement Plots

| Table of contents |
|----------------------------|
| GSM 850 MHz Head |
| GSM 850 MHz Body |
| GSM 1900 MHz Head |
| GSM 1900 MHz Body |
| WCDMA 1700 MHz Head |
| WCDMA 1700 MHz Body |

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 190CH Left hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.01, 6.01, 6.01); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.808 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = 0.037 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.549 mW/g

Maximum value of SAR (measured) = 0.841 mW/g

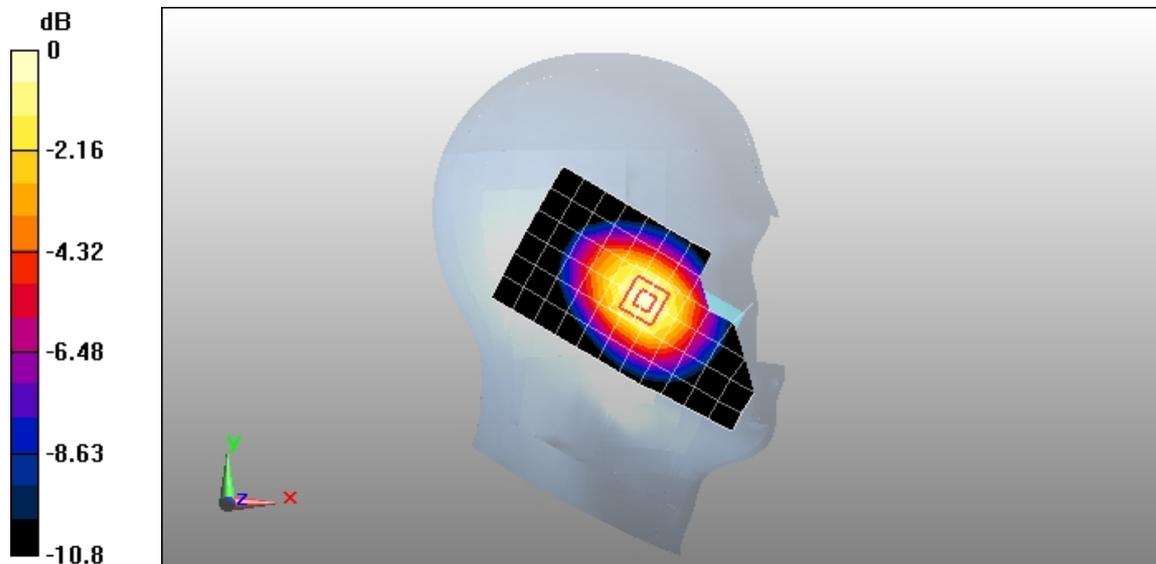

0 dB = 0.841mW/g

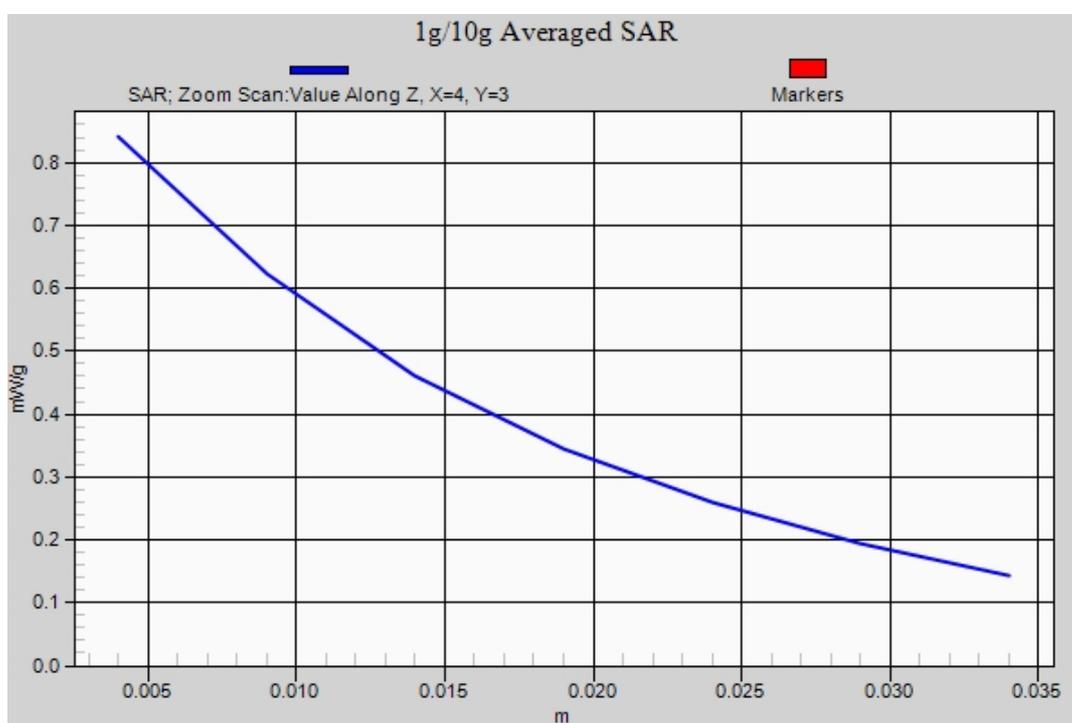

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 190CH Left hand tilt 15 degree

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.01, 6.01, 6.01); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.451 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.424 mW/g; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.450 mW/g

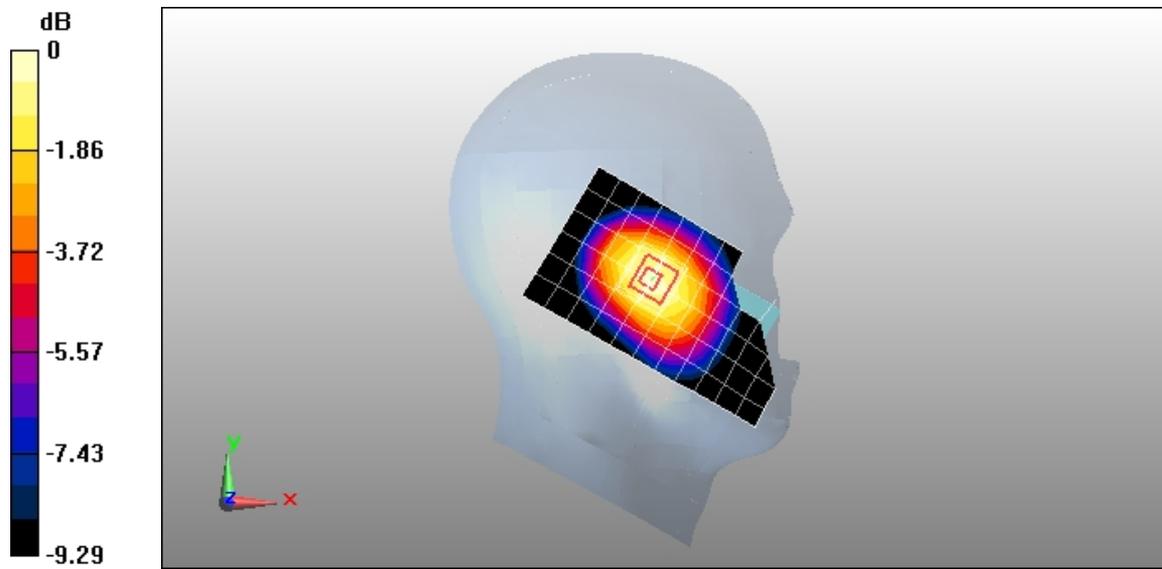

0 dB = 0.450mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 190CH Right hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.01, 6.01, 6.01); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.751 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.729 mW/g; SAR(10 g) = 0.498 mW/g

Maximum value of SAR (measured) = 0.778 mW/g

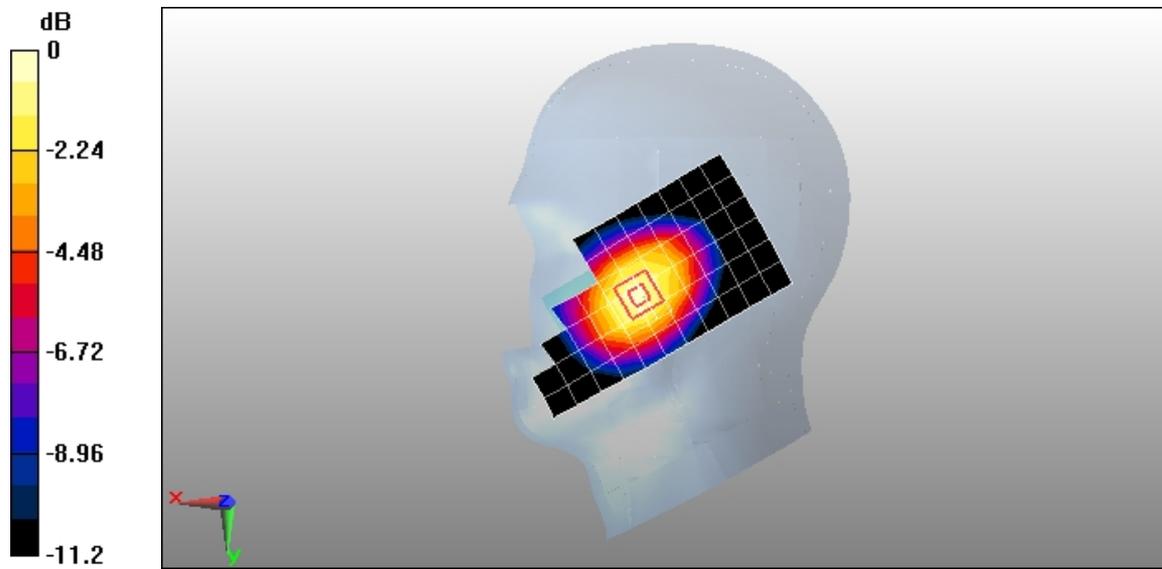

0 dB = 0.778mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 190CH Right hand tilt 15 degree

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.849$ mho/m; $\epsilon_r = 40.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.01, 6.01, 6.01); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.455 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.590 W/kg

SAR(1 g) = 0.439 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

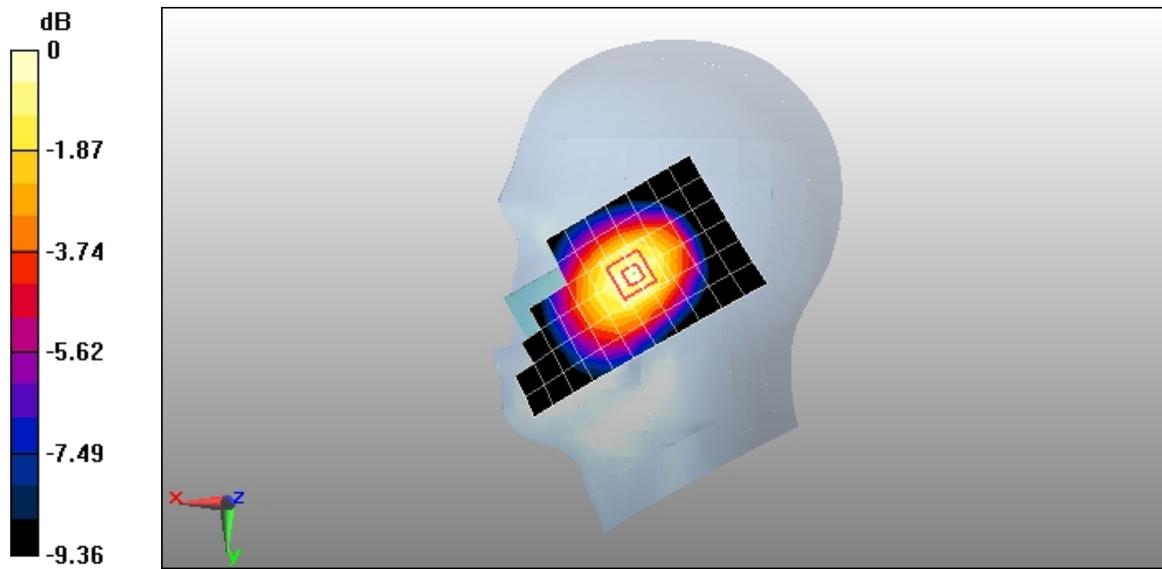

0 dB = 0.468mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 GPRS 1TS 190CH Towards Phantom 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.447 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.302 mW/g

Maximum value of SAR (measured) = 0.448 mW/g

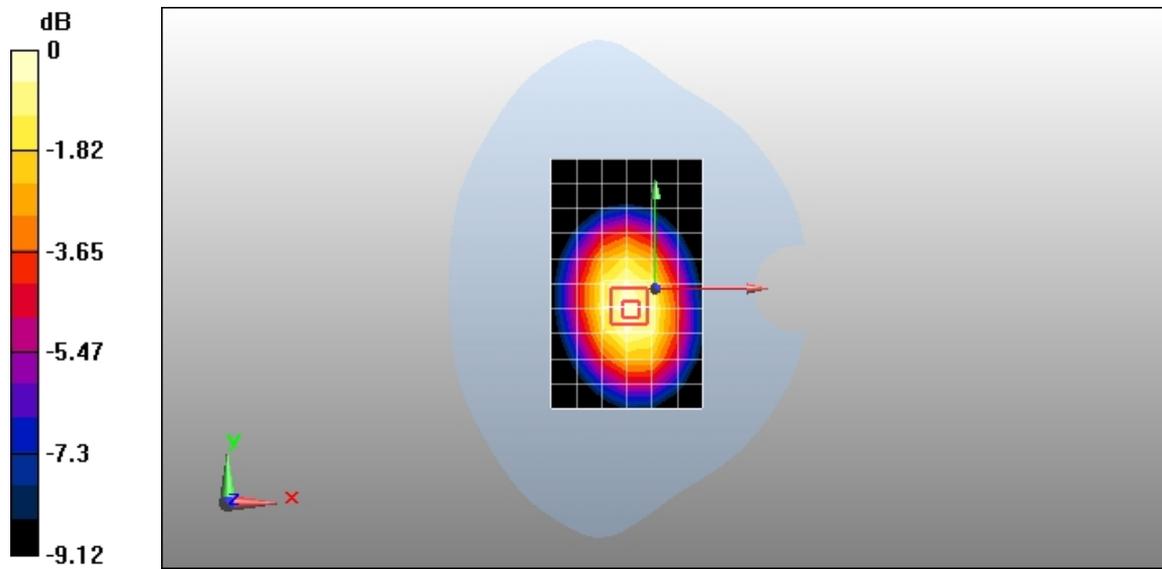

0 dB = 0.448mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 GPRS 2TS 190CH Towards Phantom 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.478 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.7 V/m; Power Drift = 0.00126 dB

Peak SAR (extrapolated) = 0.609 W/kg

SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.480 mW/g

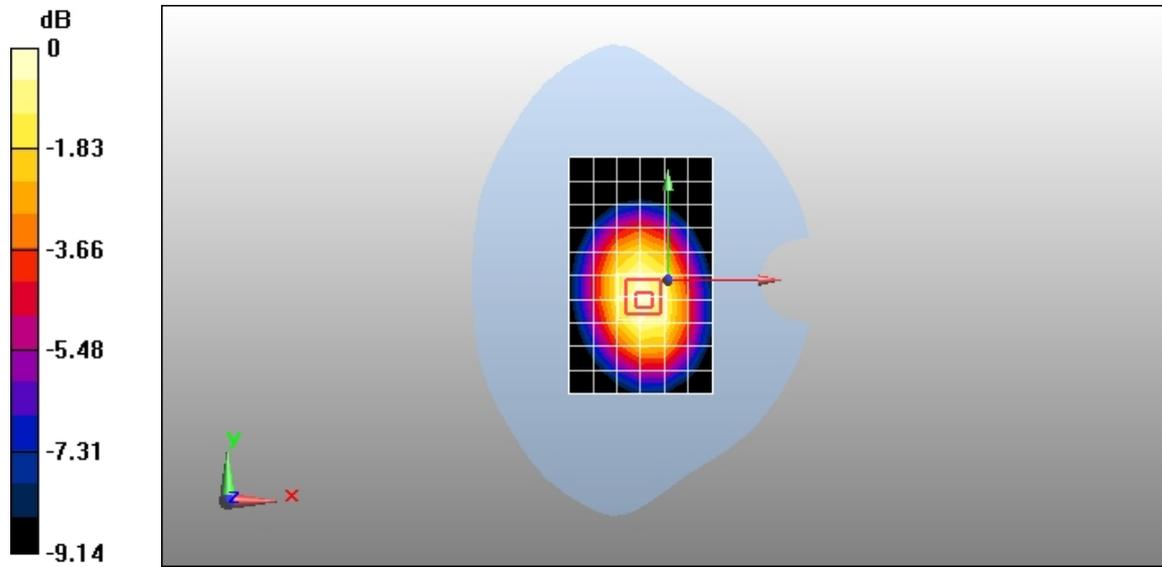

0 dB = 0.480mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 GPRS 2TS 190CH Towards Ground 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.589 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.6 V/m; Power Drift = 0.0073 dB

Peak SAR (extrapolated) = 0.758 W/kg

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.405 mW/g

Maximum value of SAR (measured) = 0.599 mW/g

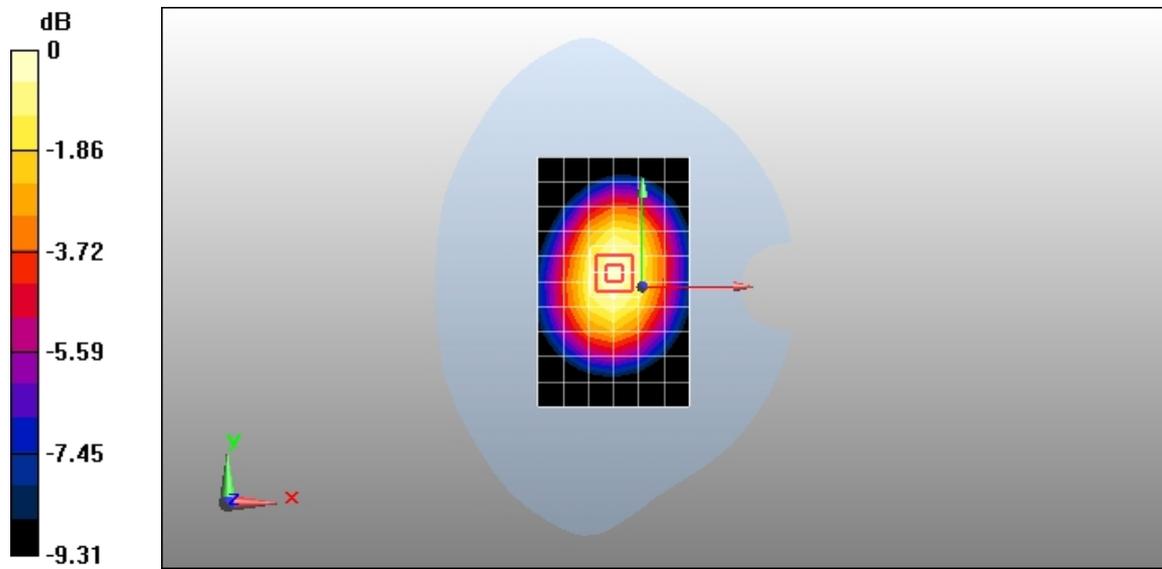

0 dB = 0.599mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 EGPRS 1TS 190CH Towards Ground 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.546 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.8 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.528 mW/g; SAR(10 g) = 0.379 mW/g

Maximum value of SAR (measured) = 0.563 mW/g

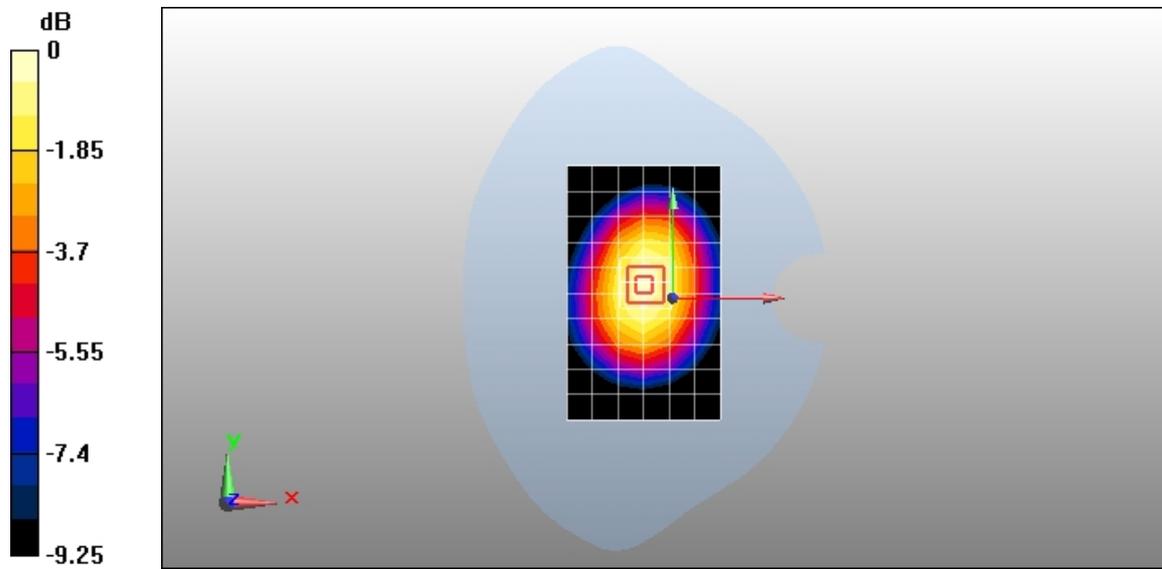

0 dB = 0.563mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 EGPRS 2TS 190CH Towards Ground 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.594 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.8 V/m; Power Drift = -0.035 dB


Peak SAR (extrapolated) = 0.765 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.408 mW/g

Maximum value of SAR (measured) = 0.603 mW/g

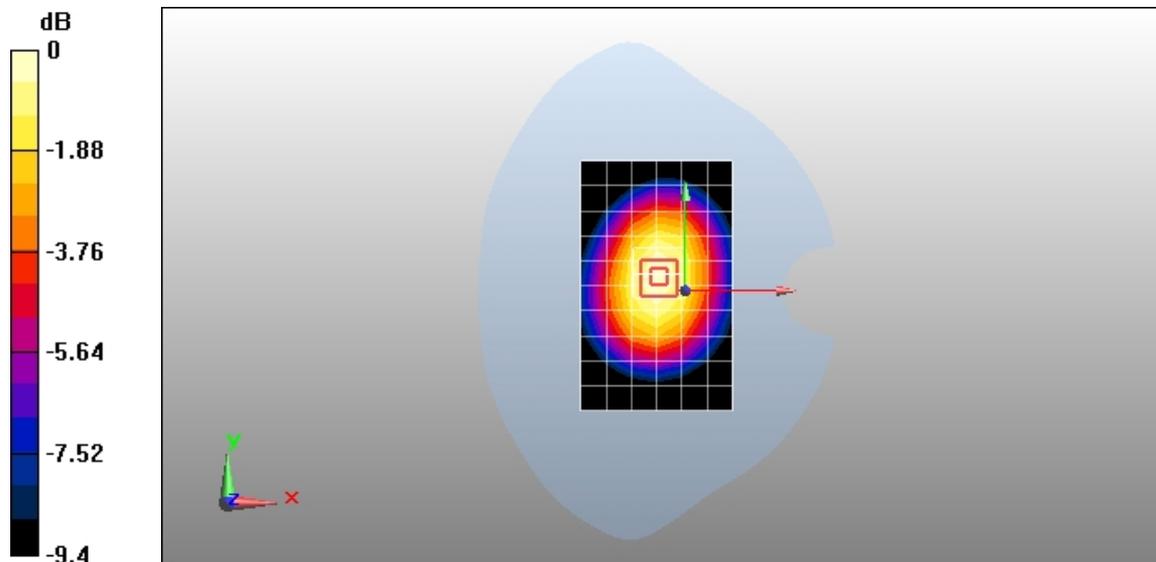

0 dB = 0.603mW/g

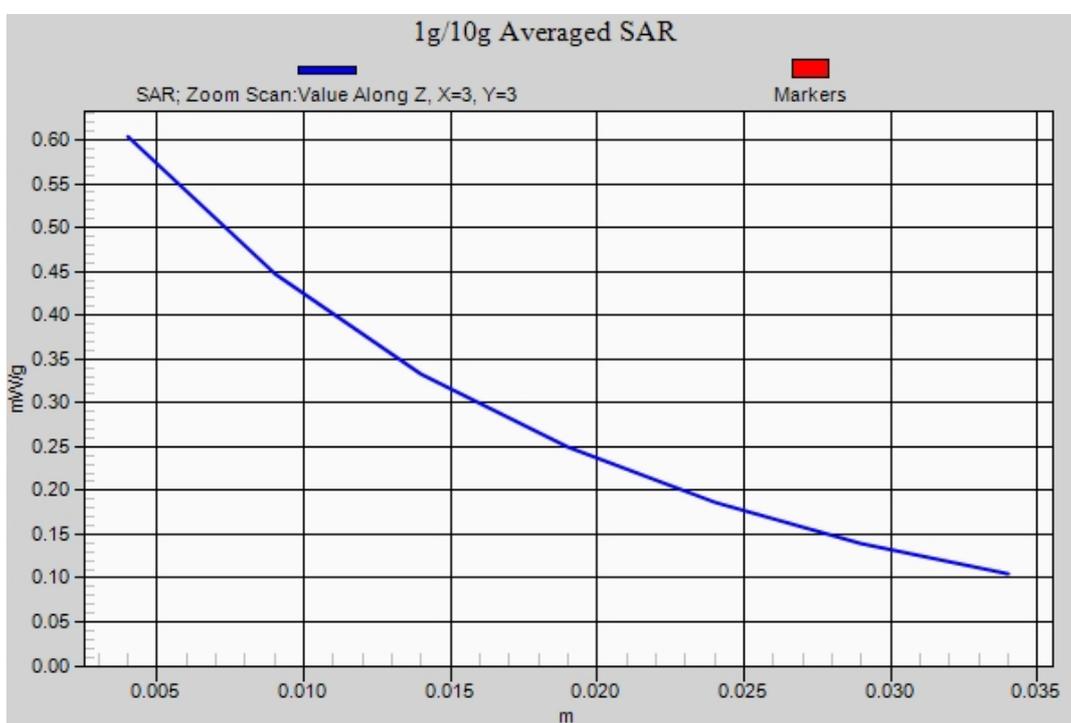

Test Laboratory: Huawei SAR Lab

D51-3 GSM850 190CH Towards Ground 15mm with headset

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 836.6 MHz

Medium parameters used: $f = 837$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(6.03, 6.03, 6.03); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.433 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.1 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.438 mW/g

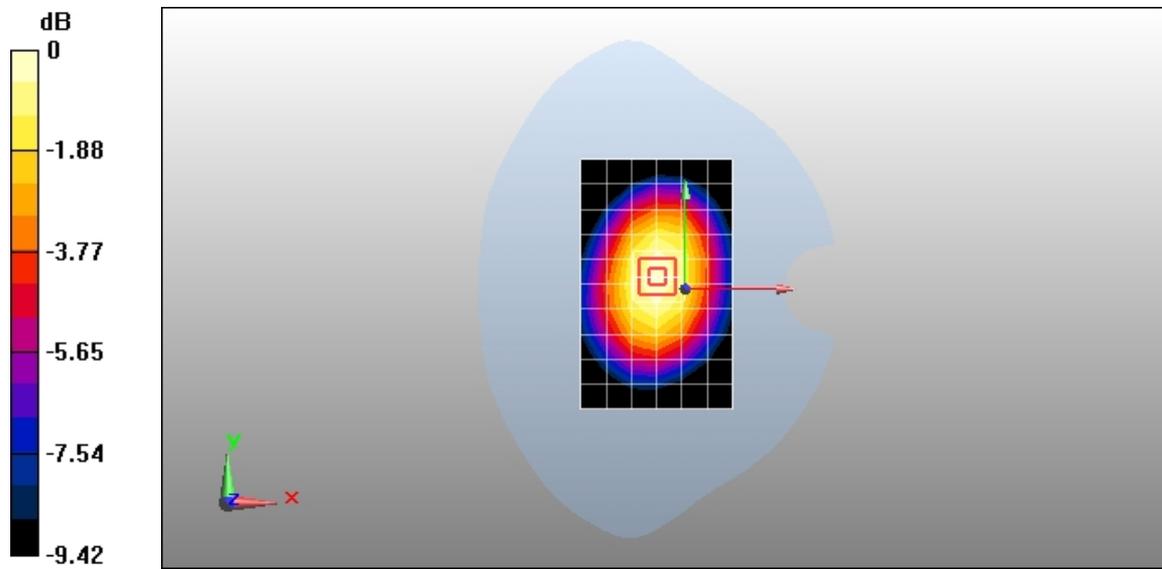

0 dB = 0.438mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 661CH Left hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.96, 4.96, 4.96); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.542 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.584 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.646 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.5 V/m; Power Drift = -0.023 dB


Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.226 mW/g

Maximum value of SAR (measured) = 0.405 mW/g

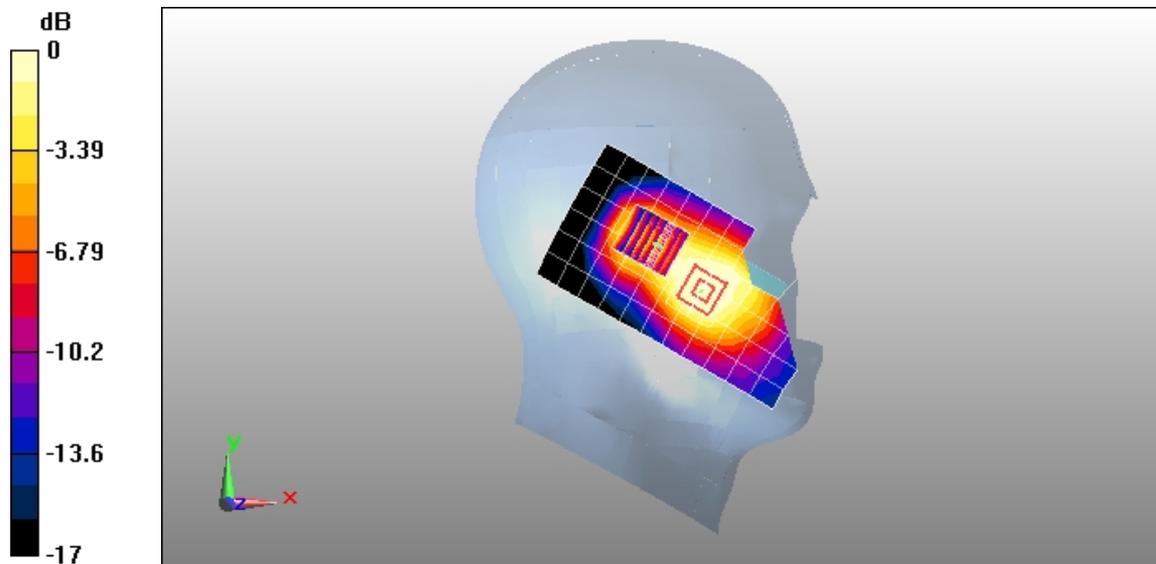

0 dB = 0.405mW/g

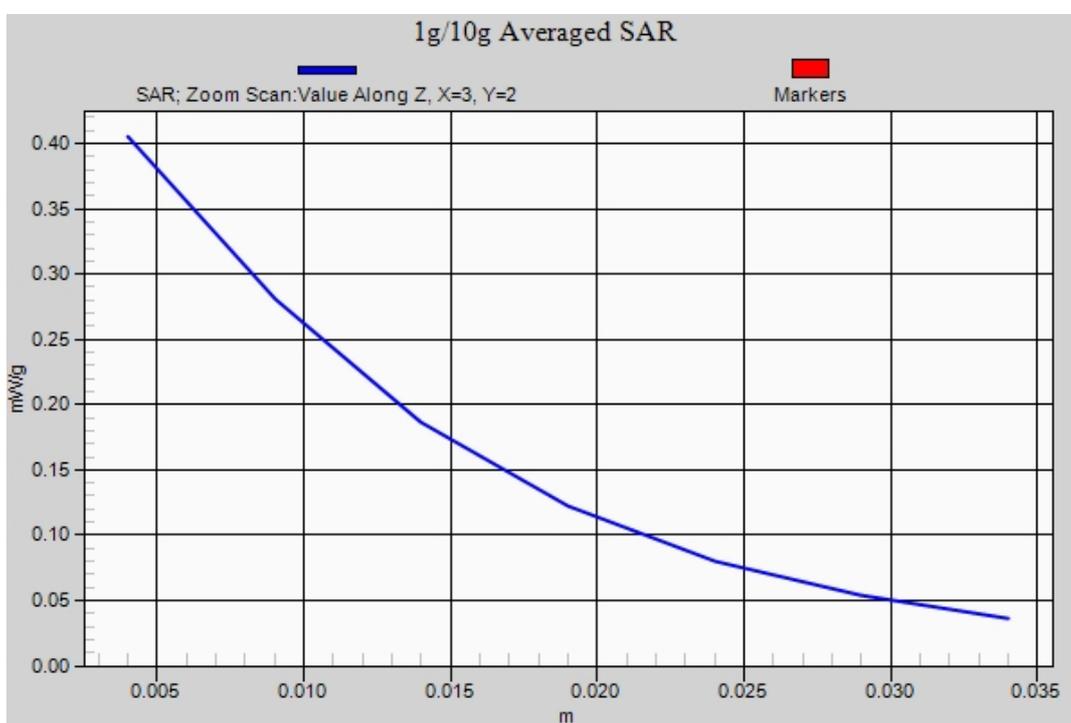

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 661CH Left hand tilt 15 degree

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.96, 4.96, 4.96); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.337 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.3 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.355 mW/g

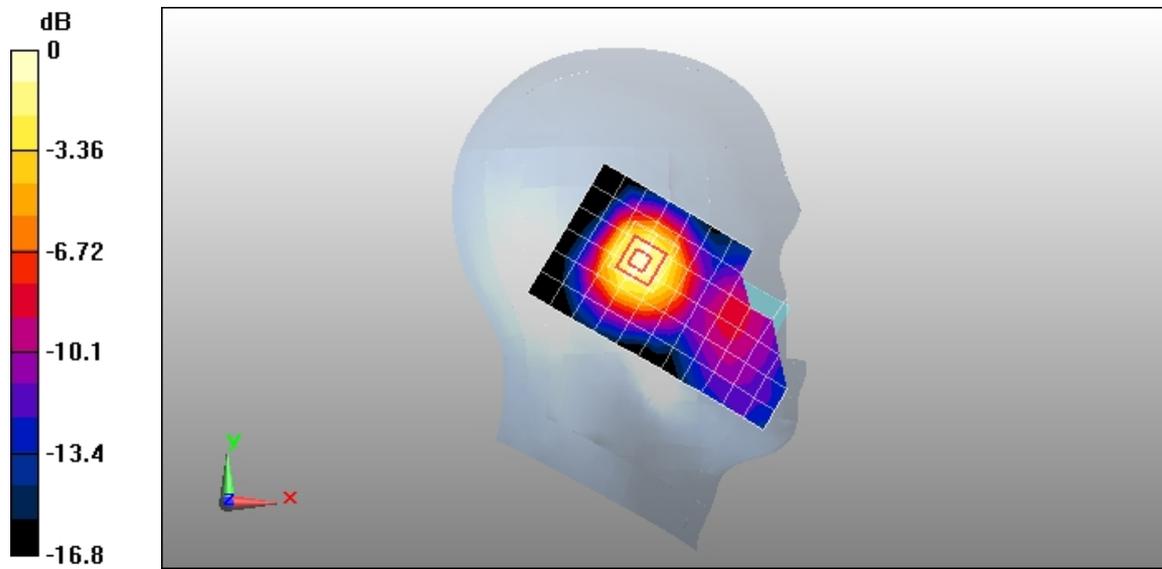

0 dB = 0.355mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 661CH Right hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.96, 4.96, 4.96); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.470 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.67 V/m; Power Drift = -0.163 dB

Peak SAR (extrapolated) = 0.778 W/kg

SAR(1 g) = 0.460 mW/g; SAR(10 g) = 0.274 mW/g

Maximum value of SAR (measured) = 0.497 mW/g

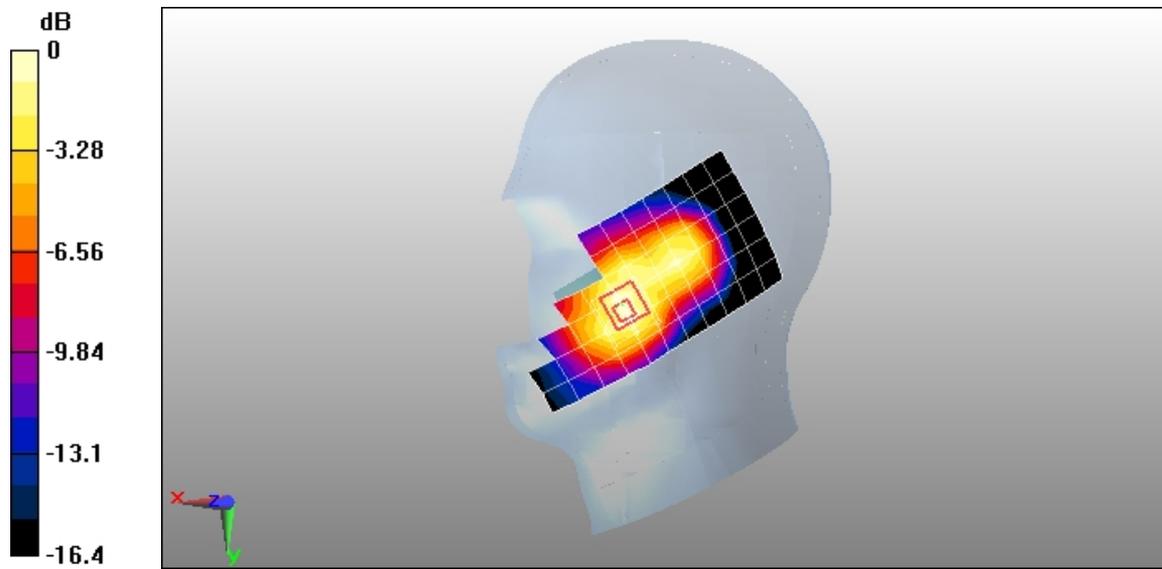

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 661CH Right hand tilt 15 degree

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.96, 4.96, 4.96); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.387 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.6 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.569 W/kg

SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.222 mW/g

Maximum value of SAR (measured) = 0.401 mW/g

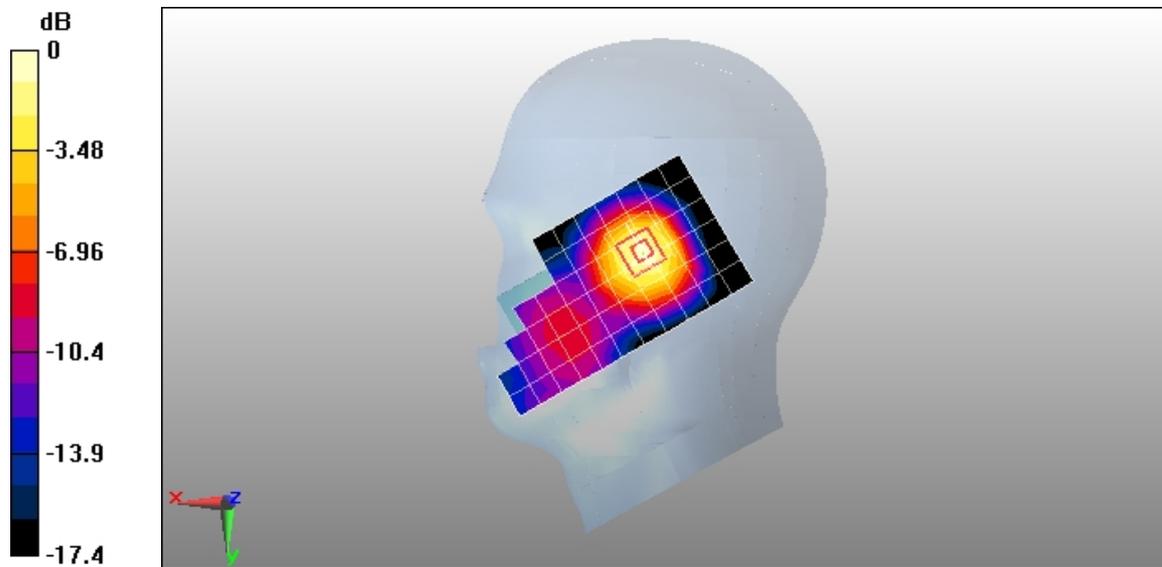

0 dB = 0.401mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 GPRS 1TS 661CH Towards Phantom 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.73, 4.73, 4.73); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.229 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.71 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.334 W/kg

SAR(1 g) = 0.219 mW/g; SAR(10 g) = 0.137 mW/g

Maximum value of SAR (measured) = 0.234 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.71 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.227 mW/g

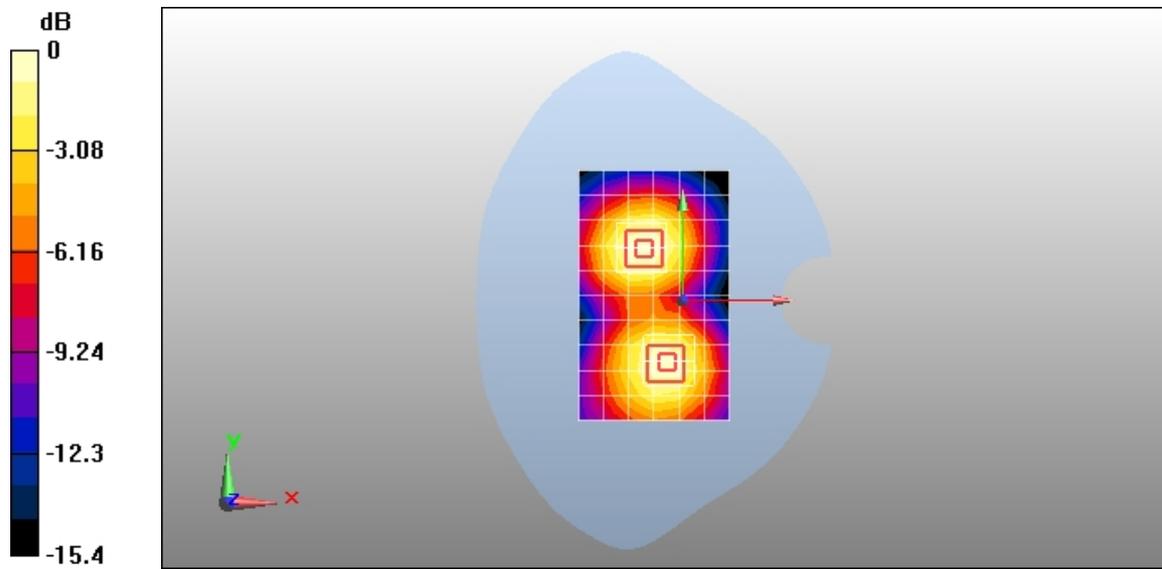

0 dB = 0.227mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 GPRS 2TS 661CH Towards Phantom 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.73, 4.73, 4.73); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.258 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.03 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.155 mW/g


Maximum value of SAR (measured) = 0.267 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.03 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.390 W/kg

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.144 mW/g

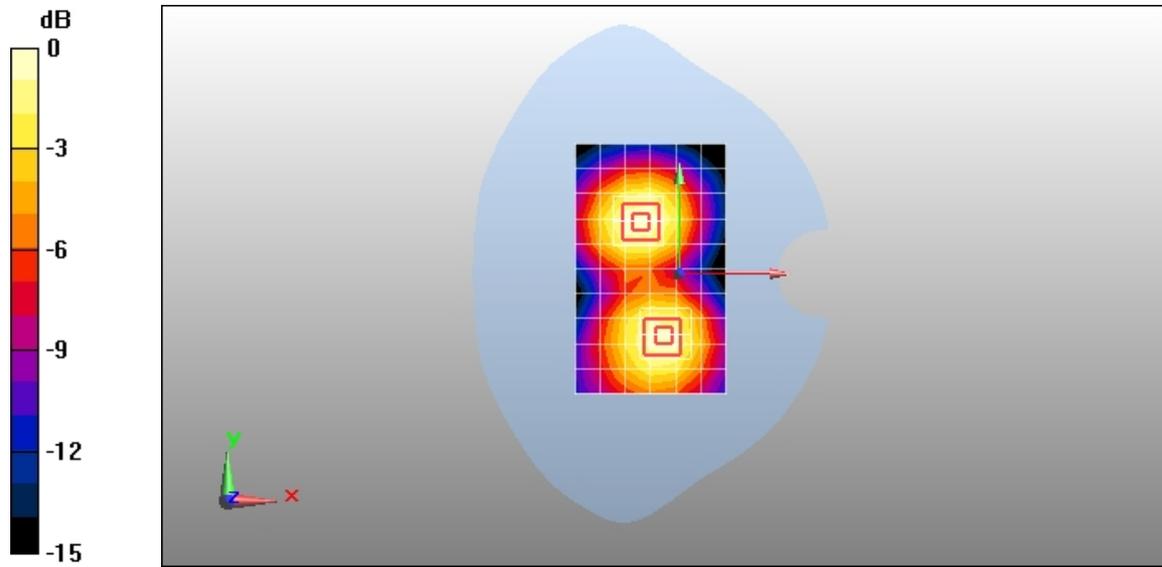

0 dB = 0.258mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 GPRS 2TS 661CH Towards Ground 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.73, 4.73, 4.73); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.360 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.38 V/m; Power Drift = -0.034 dB


Peak SAR (extrapolated) = 0.580 W/kg

SAR(1 g) = 0.350 mW/g; SAR(10 g) = 0.211 mW/g

Maximum value of SAR (measured) = 0.380 mW/g

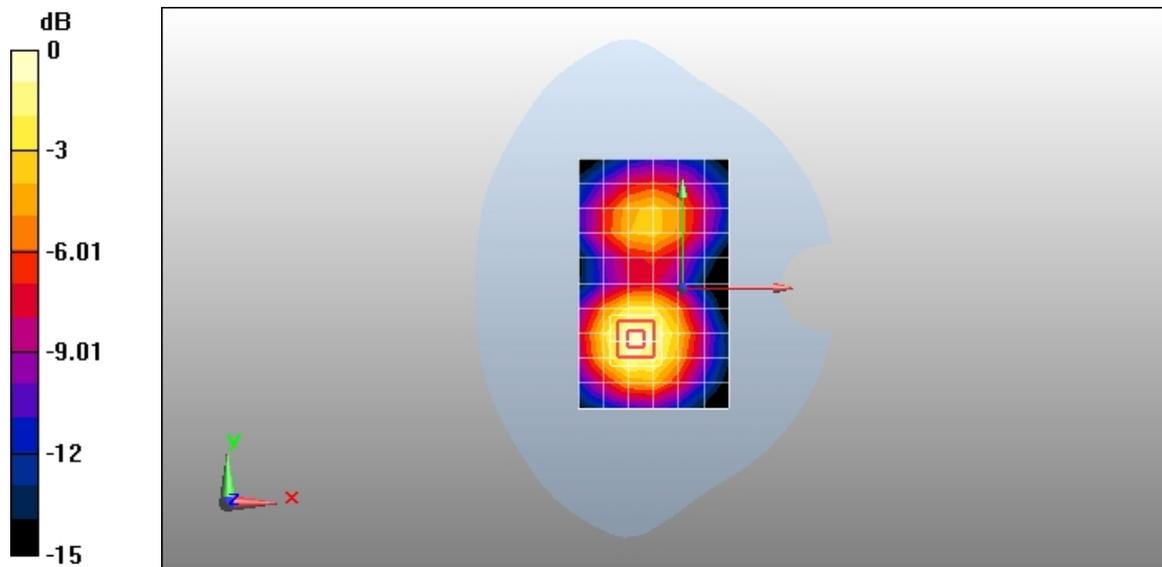

0 dB = 0.380mW/g

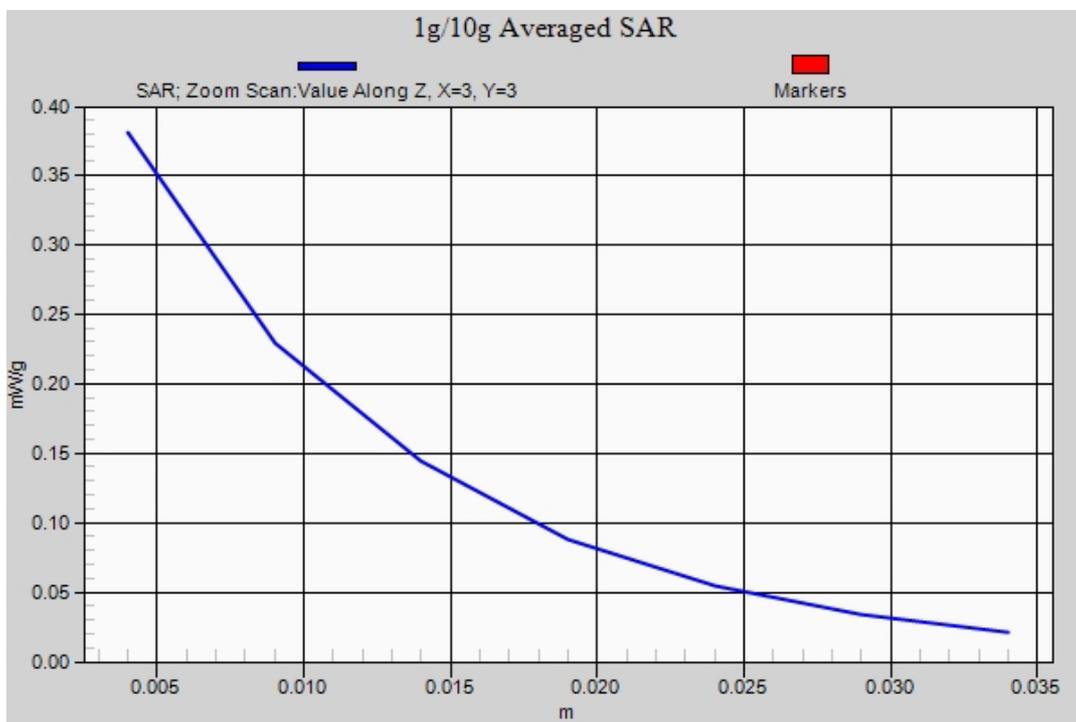

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 EGPRS 1TS 661CH Towards Ground 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.73, 4.73, 4.73); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.318 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.88 V/m; Power Drift = 0.064 dB

Peak SAR (extrapolated) = 0.510 W/kg

SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.334 mW/g

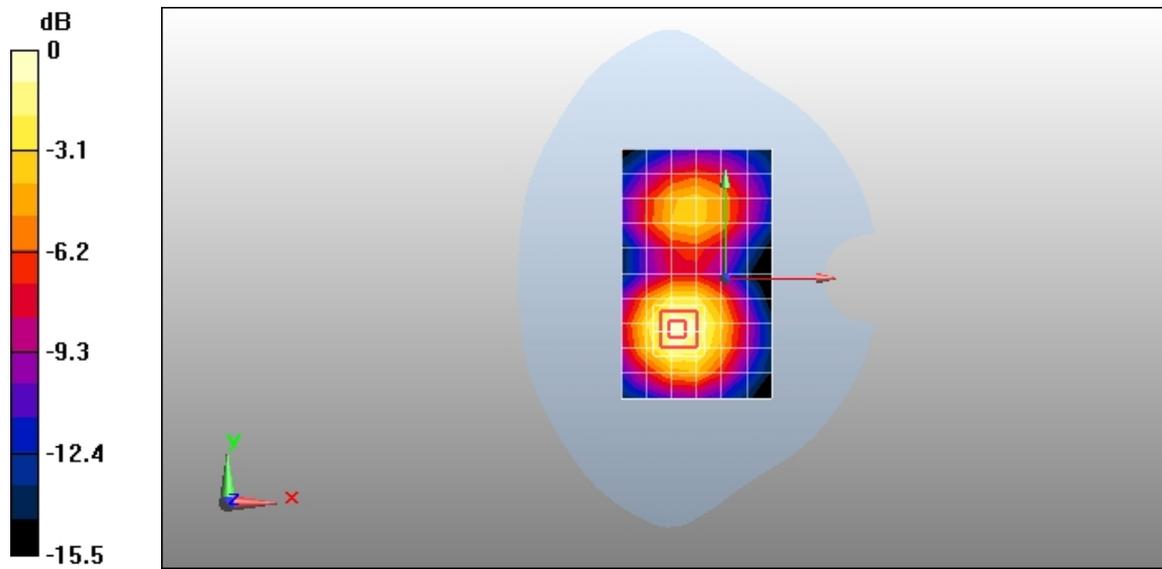

0 dB = 0.334mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 EGPRS 2TS 661CH Towards Ground 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 2TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.73, 4.73, 4.73); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.359 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.39 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.375 mW/g

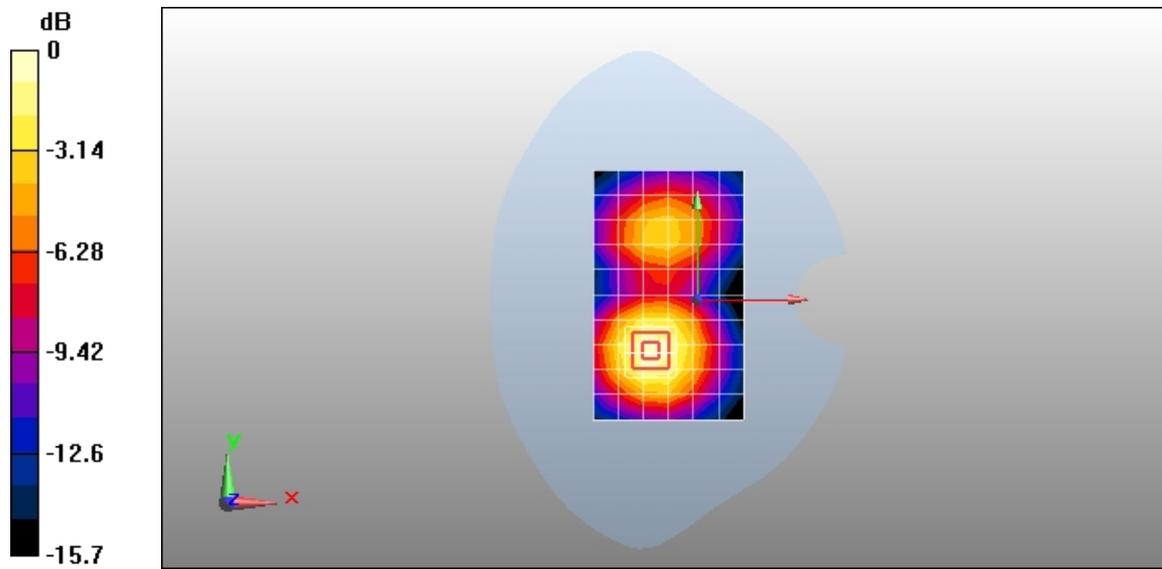

0 dB = 0.375mW/g

Test Laboratory: Huawei SAR Lab

D51-3 GSM1900 661CH Towards Ground 15mm with headset

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -GSM/GPRS/EDGE 1TS; Frequency: 1880 MHz

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.73, 4.73, 4.73); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.267 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.81 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.443 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.159 mW/g

Maximum value of SAR (measured) = 0.287 mW/g

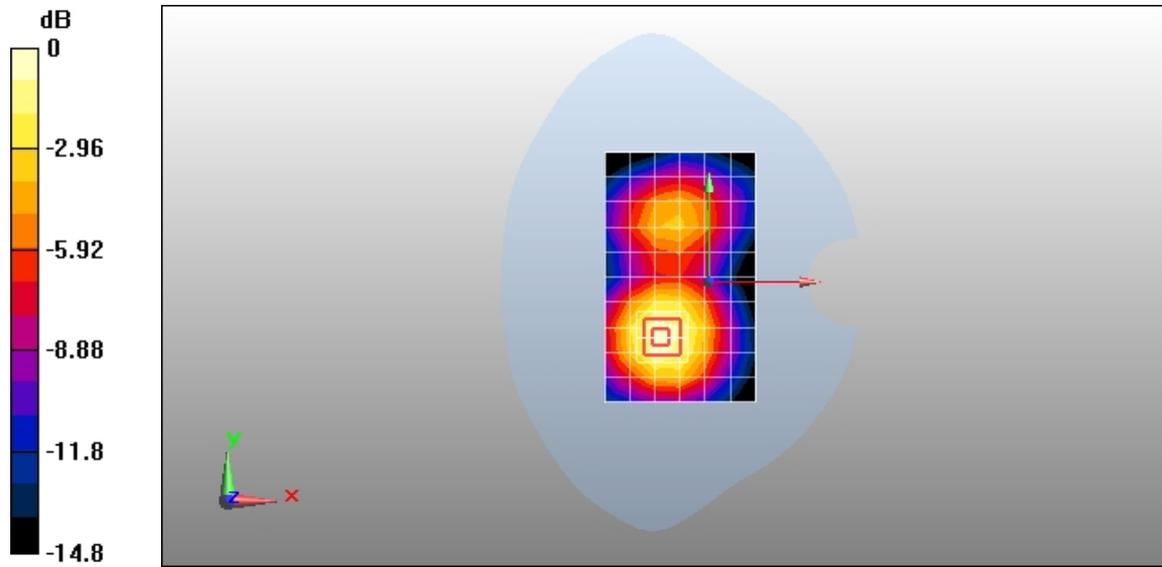

0 dB = 0.287mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1413CH Left hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(5.1, 5.1, 5.1); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.18 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.98 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

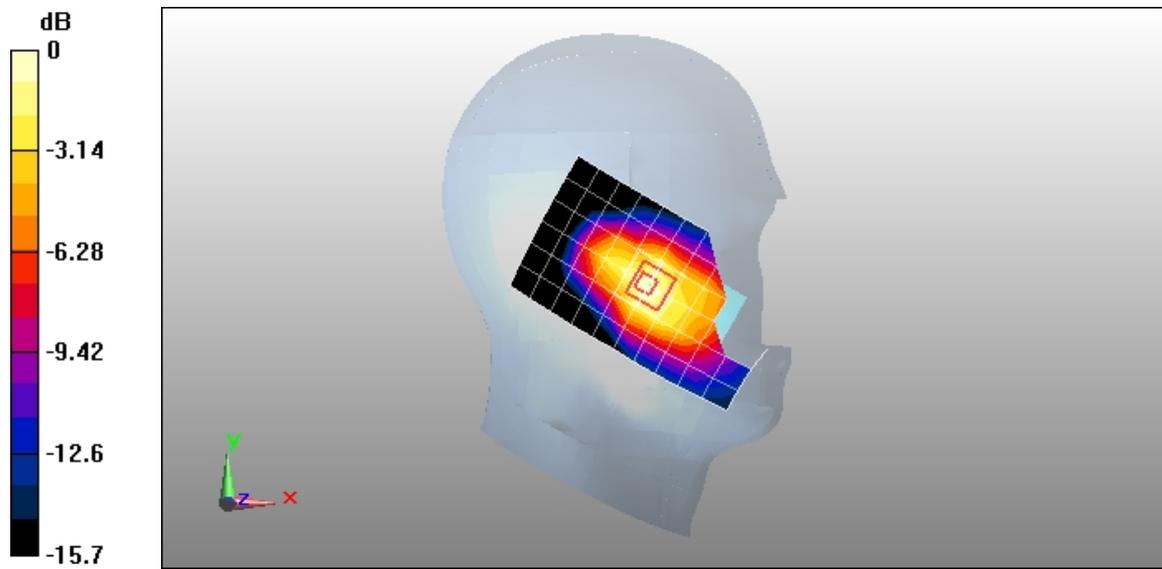

0 dB = 1.14mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1413CH Left hand tilt 15 degree

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³


Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(5.1, 5.1, 5.1); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.611 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.1 V/m; Power Drift = -0.113 dB
Peak SAR (extrapolated) = 0.887 W/kg
SAR(1 g) = 0.576 mW/g; SAR(10 g) = 0.351 mW/g
Maximum value of SAR (measured) = 0.618 mW/g

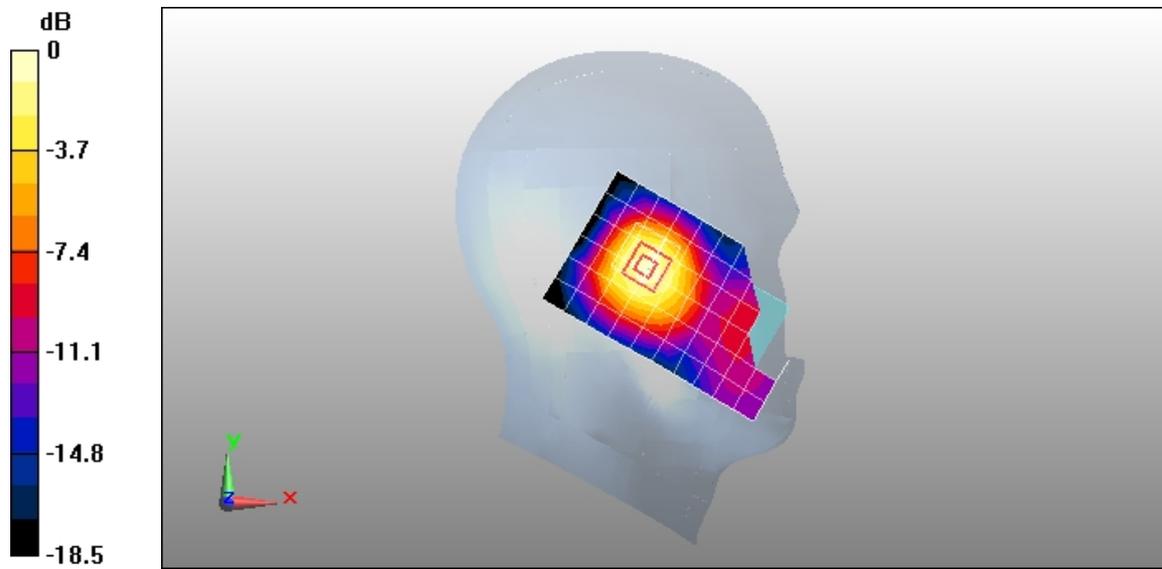

0 dB = 0.618mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1413CH Right hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(5.1, 5.1, 5.1); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.15 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.76 V/m; Power Drift = 0.000648 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.565 mW/g

Maximum value of SAR (measured) = 1.14 mW/g

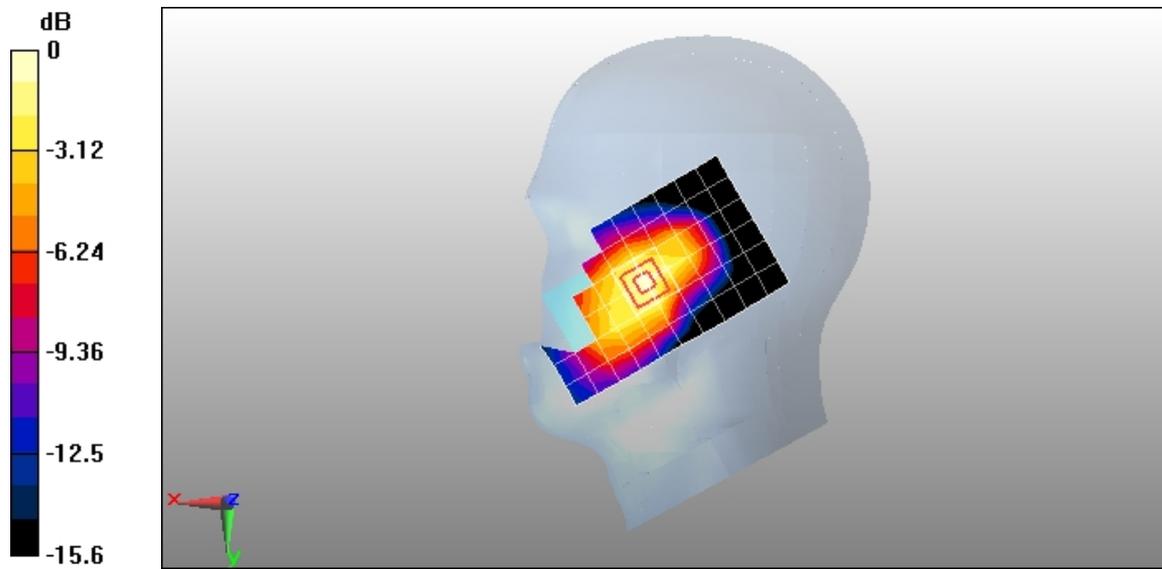

0 dB = 1.14mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1413CH Right hand tilt 15 degree

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1712.4 MHz

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(5.1, 5.1, 5.1); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.693 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 14.2 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.404 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.714 mW/g

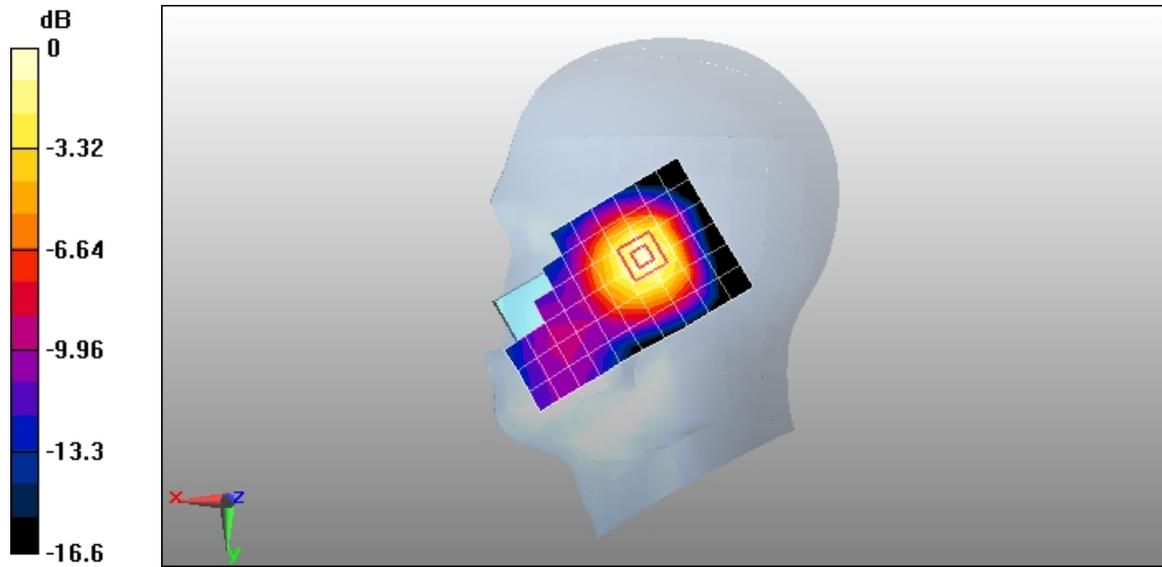

0 dB = 0.714mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1513CH Left hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1752.6 MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(5.1, 5.1, 5.1); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.14 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.25 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.592 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

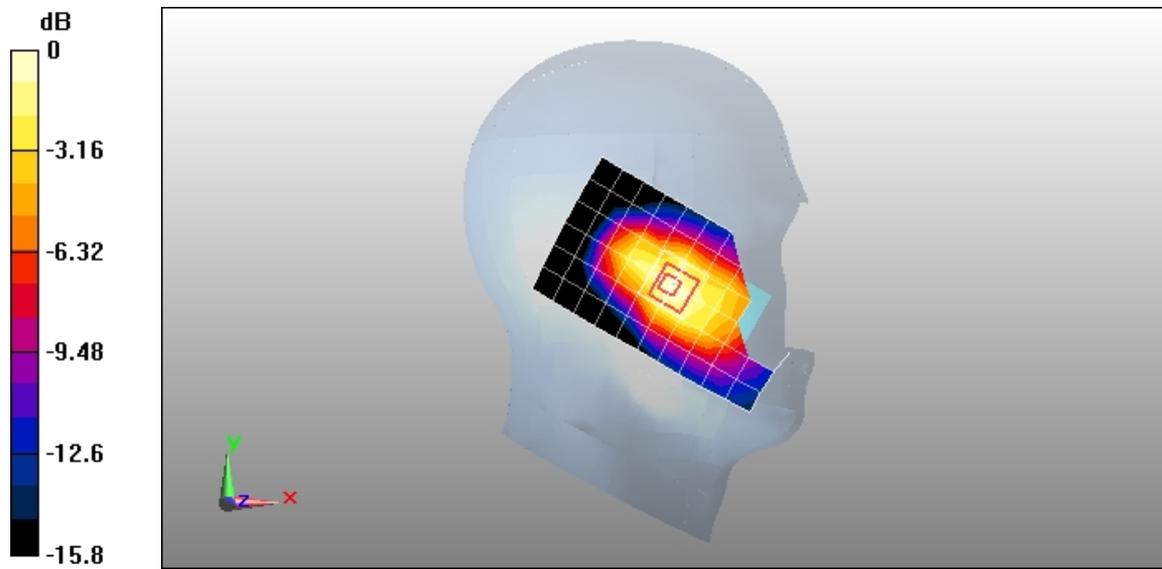

0 dB = 1.11mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1312CH Left hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1712.4 MHz

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(5.1, 5.1, 5.1); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.27 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 6.55 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 1.86 W/kg


SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.614 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.24 mW/g

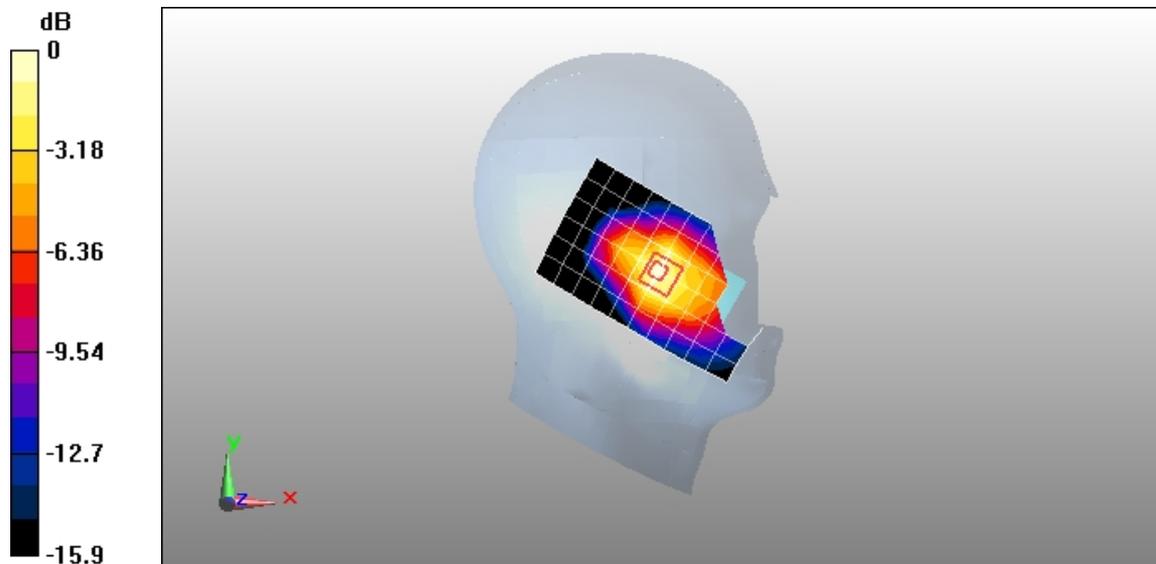

0 dB = 1.24mW/g

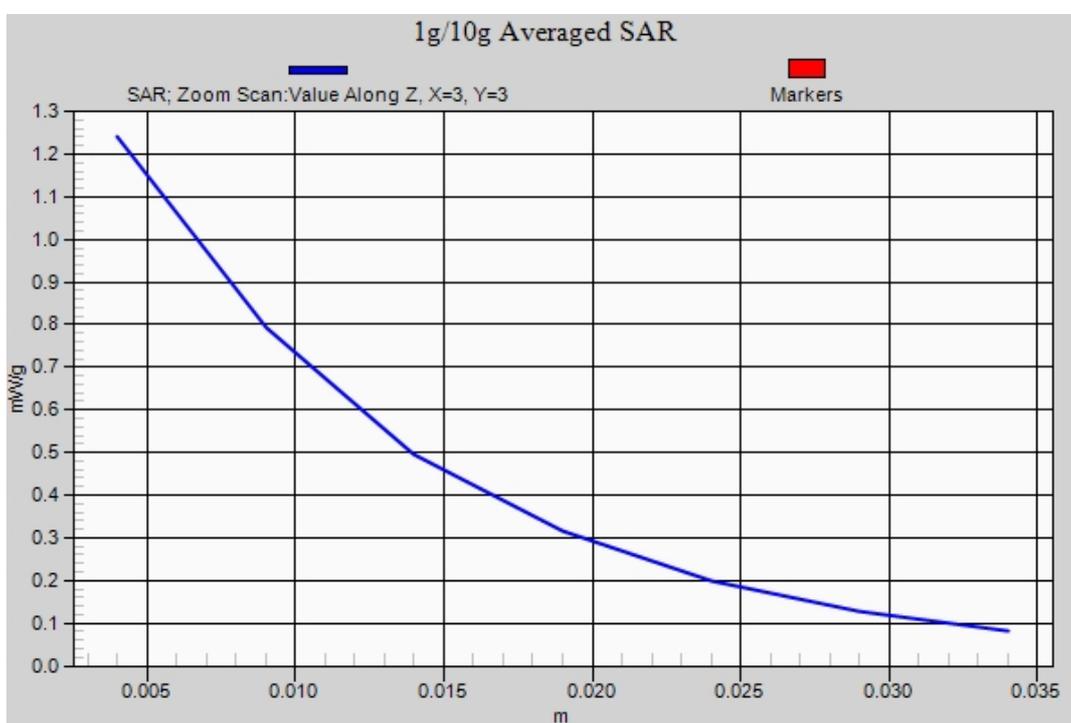

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1513CH Right hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1752.6 MHz

Medium parameters used: $f = 1753$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(5.1, 5.1, 5.1); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 mW/g


Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.08 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.940 mW/g; SAR(10 g) = 0.550 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

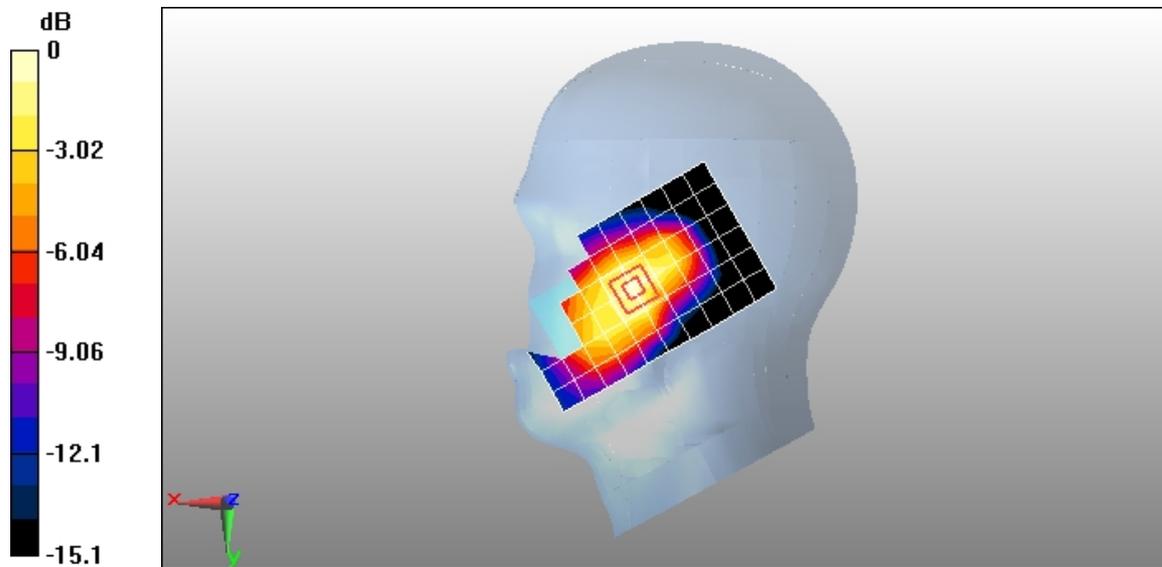

0 dB = 1.08mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1312CH Right hand touch cheek

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1712.4 MHz

Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(5.1, 5.1, 5.1); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Head/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.21 mW/g

Configuration/Head/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 7.84 V/m; Power Drift = -0.062 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.612 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.25 mW/g

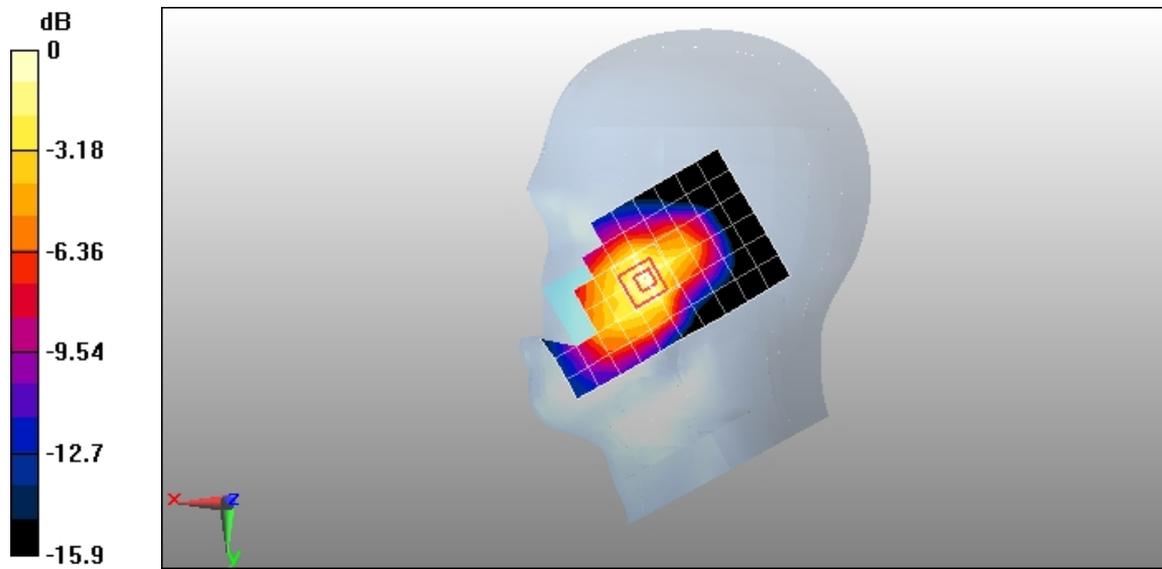

0 dB = 1.25mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1413CH Towards Phantom 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.91, 4.91, 4.91); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.457 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 0.634 W/kg

SAR(1 g) = 0.423 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.454 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 0.533 W/kg

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.359 mW/g

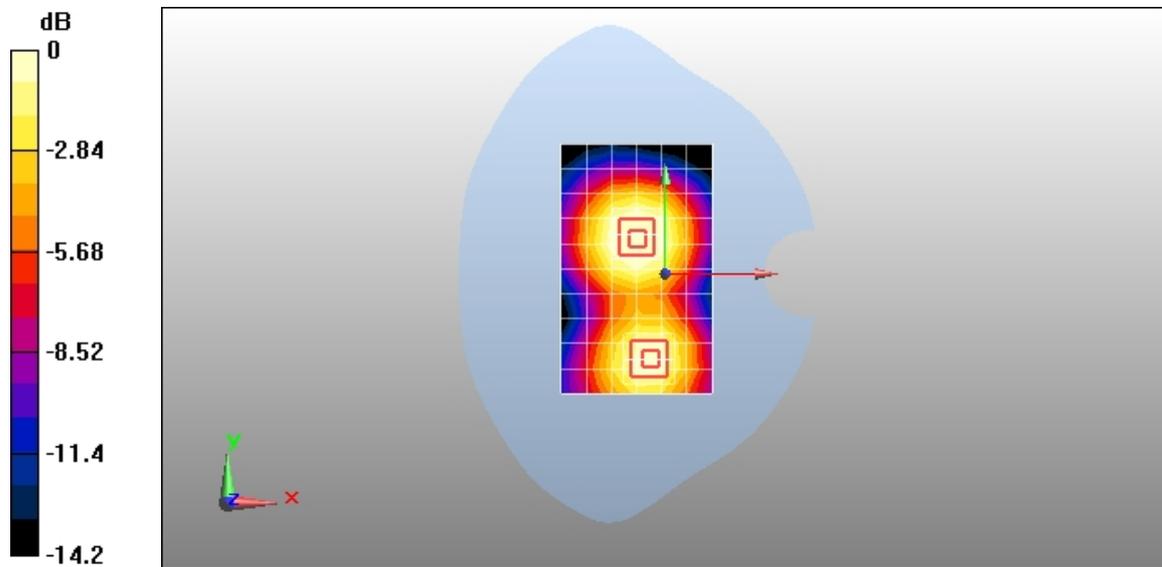

0 dB = 0.359mW/g

Test Laboratory: Huawei SAR Lab

D51-3 WCDMA1700 1413CH Towards Ground 15mm

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.91, 4.91, 4.91); Calibrated: 2011-3-11
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 2010-10-22
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.506 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.61 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.824 W/kg

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.303 mW/g

Maximum value of SAR (measured) = 0.544 mW/g

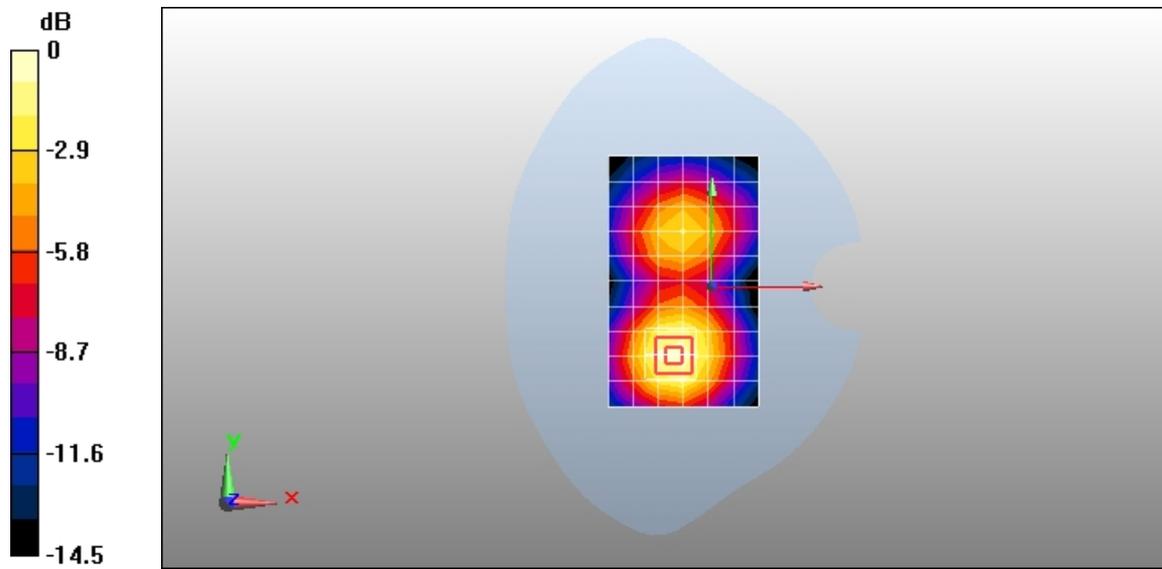

0 dB = 0.544mW/g

Test Laboratory: HUAWEI SAR Lab

D51-3 WCDMA1700 1413CH Towards Ground 15mm with HSDPA

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.91, 4.91, 4.91); Calibrated: 3/11/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.497 mW/g


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.79 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.822 W/kg

SAR(1 g) = 0.499 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.547 mW/g

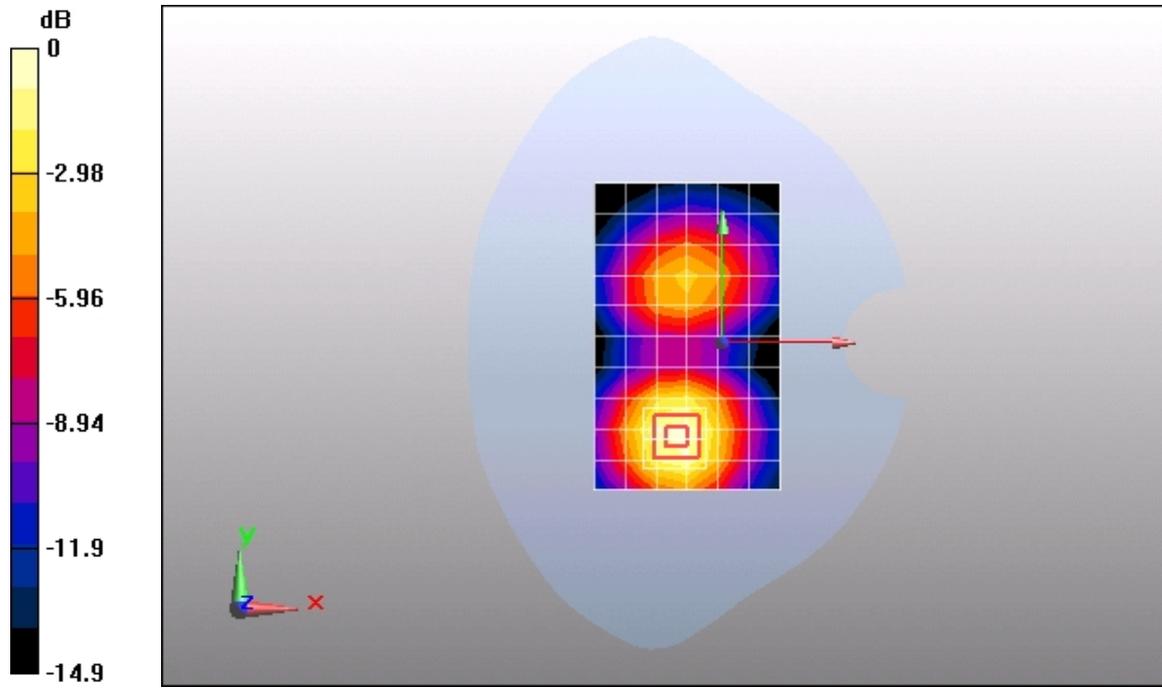

0 dB = 0.547mW/g

Test Laboratory: HUAWEI SAR Lab

D51-3 WCDMA1700 1413CH Towards Ground 15mm with Headset

DUT: D51-3; Type: Mobile Phone ; Serial: Q2U7NB1180400001

Communication System: HW -UMTS-FDD; Frequency: 1732.6 MHz

Medium parameters used: $f = 1733$ MHz; $\sigma = 1.51$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV3 - SN3254; ConvF(4.91, 4.91, 4.91); Calibrated: 3/11/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1235; Calibrated: 10/22/2010
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- Measurement SW: DASY5, V5.2 Build 157; SEMCAD X Version 14.0 Build 57

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.520 mW/g

Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.17 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.860 W/kg

SAR(1 g) = 0.518 mW/g; SAR(10 g) = 0.307 mW/g

Maximum value of SAR (measured) = 0.563 mW/g

