





2.17 11N40_H_2447@Ant 1


Pref:




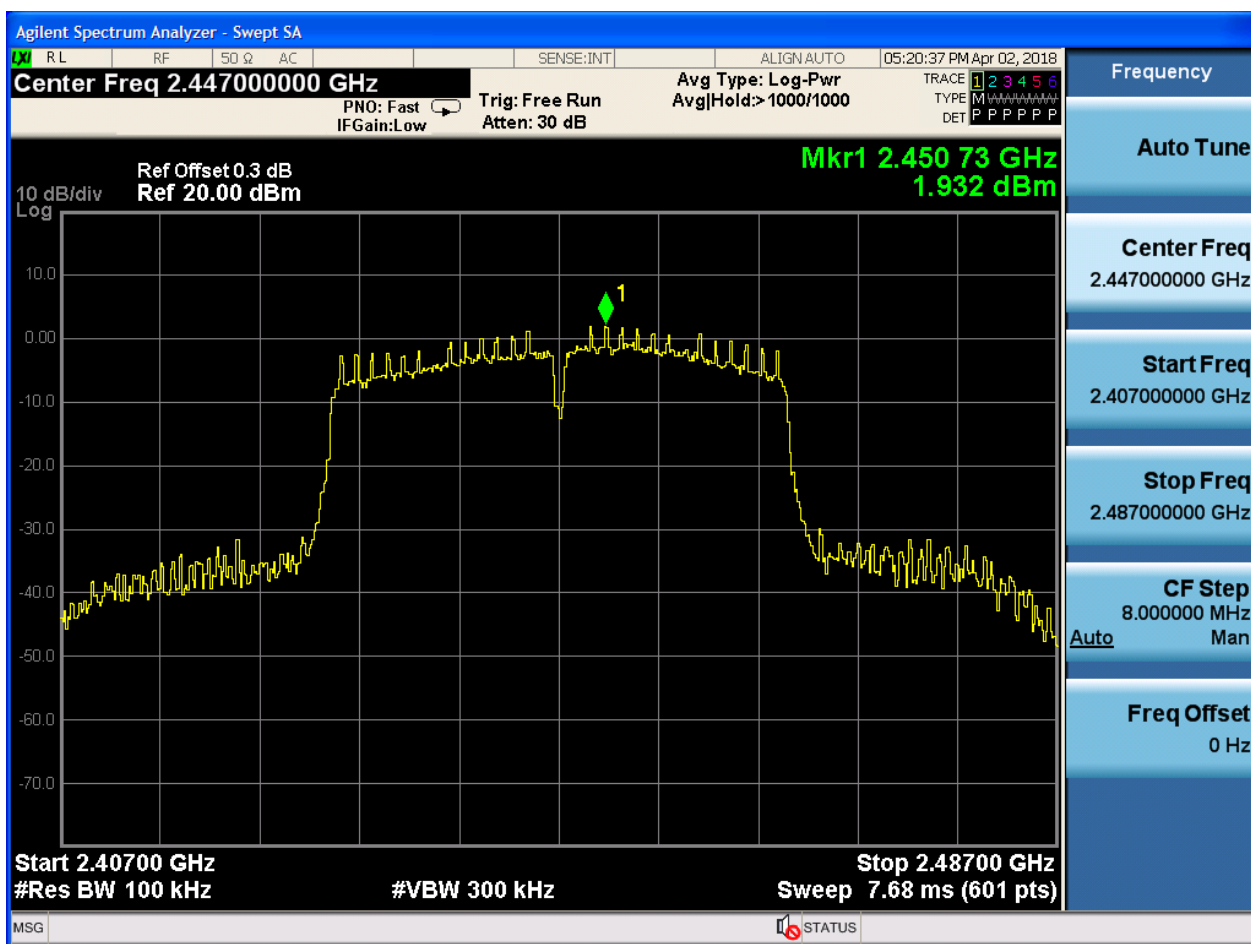



Puw:

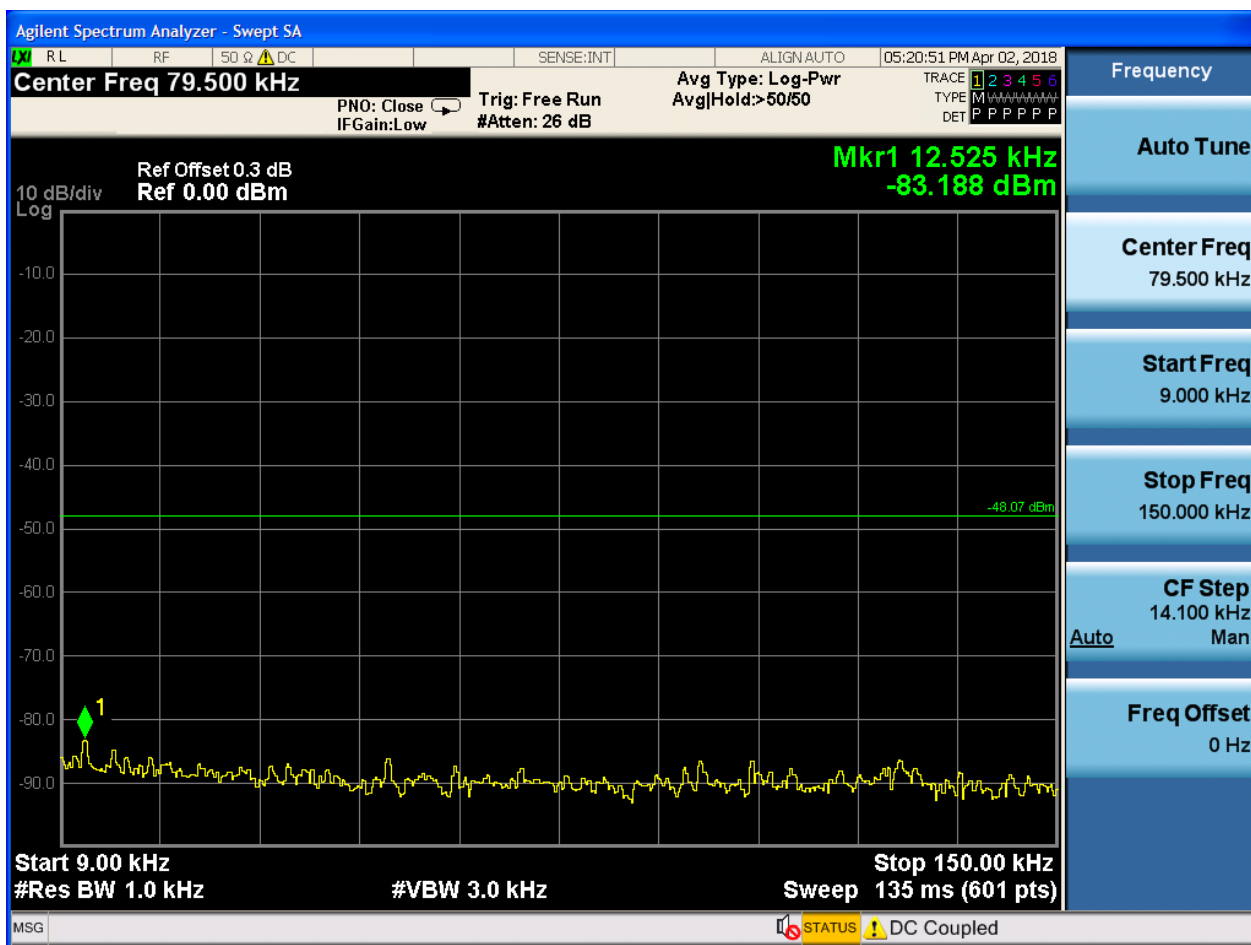

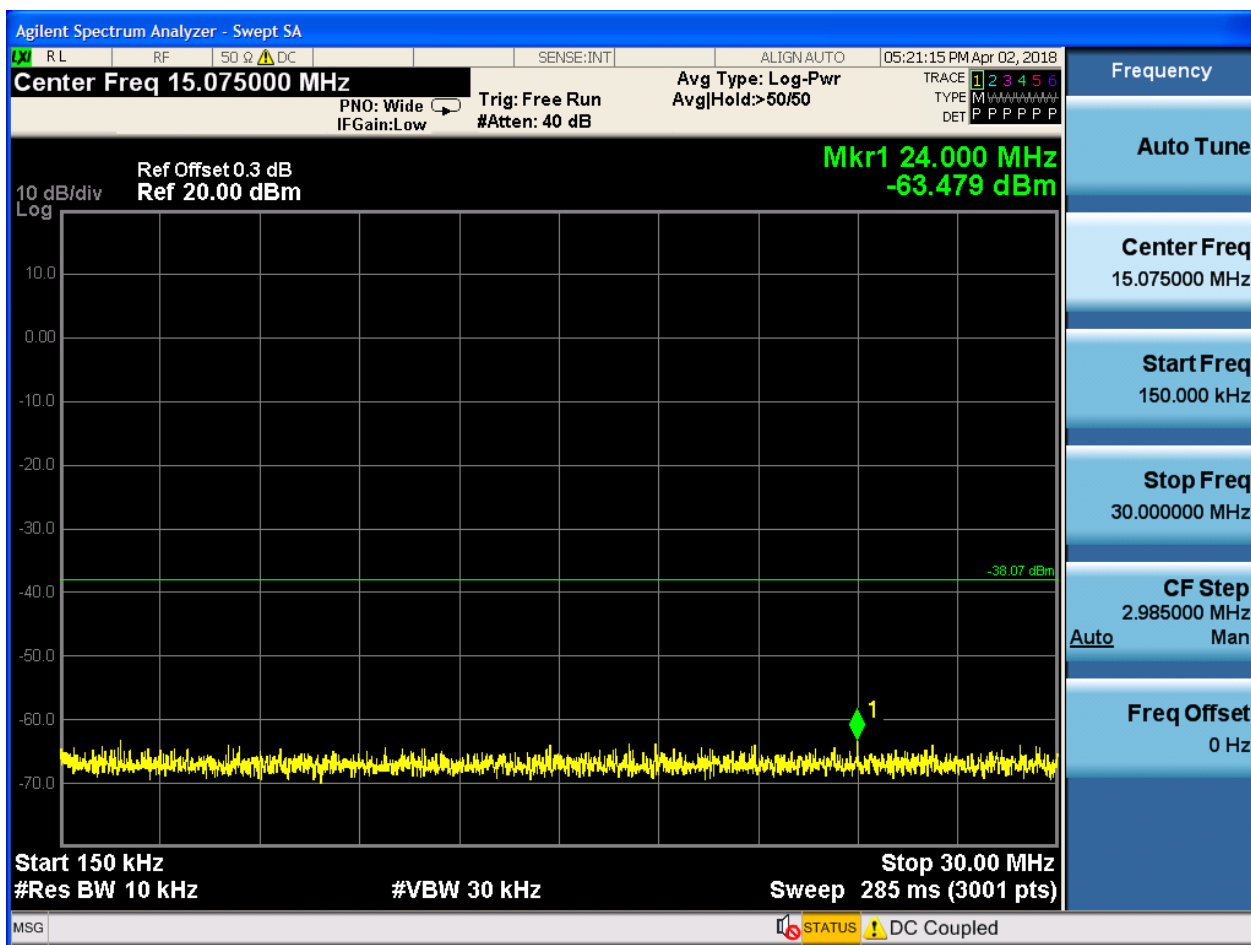

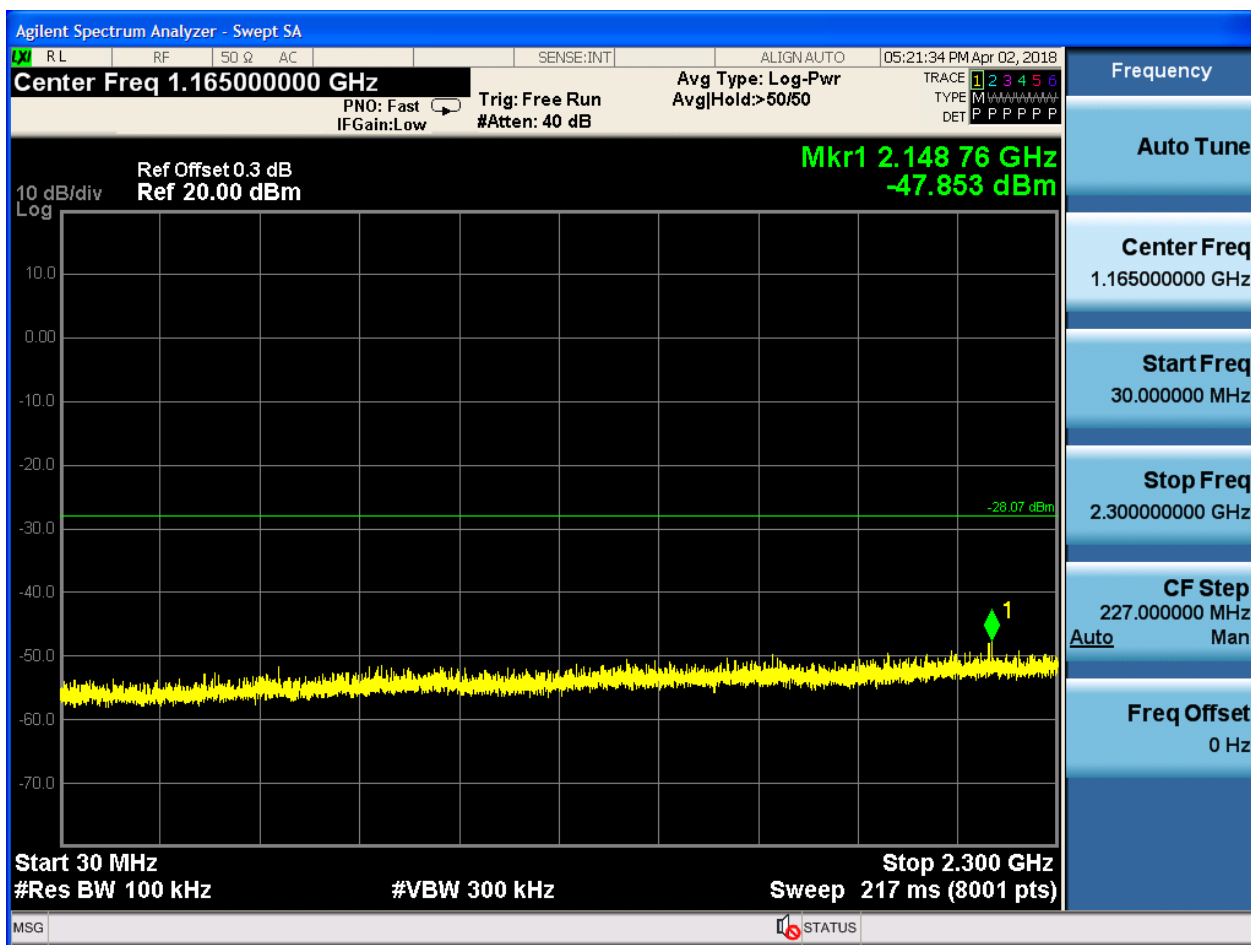

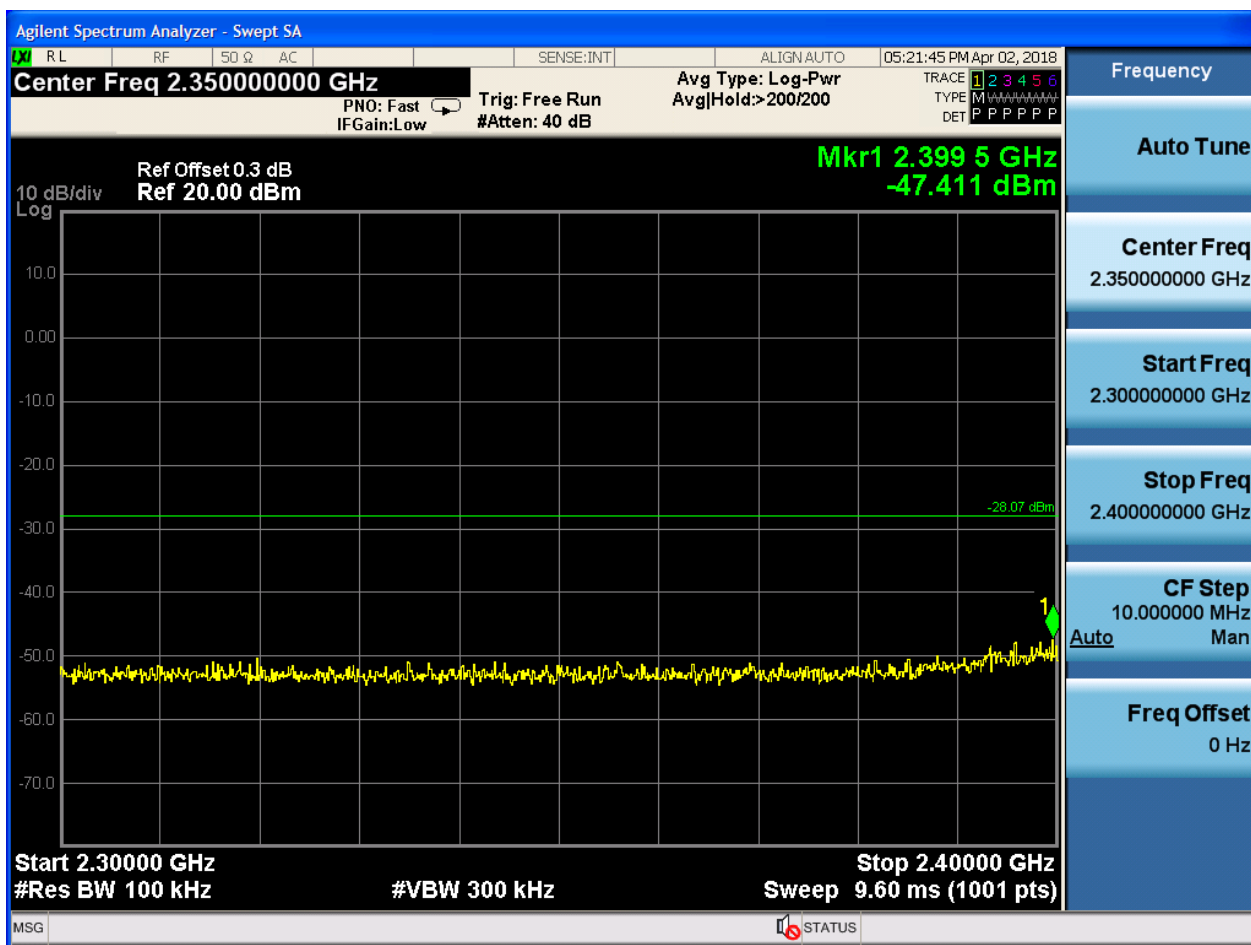

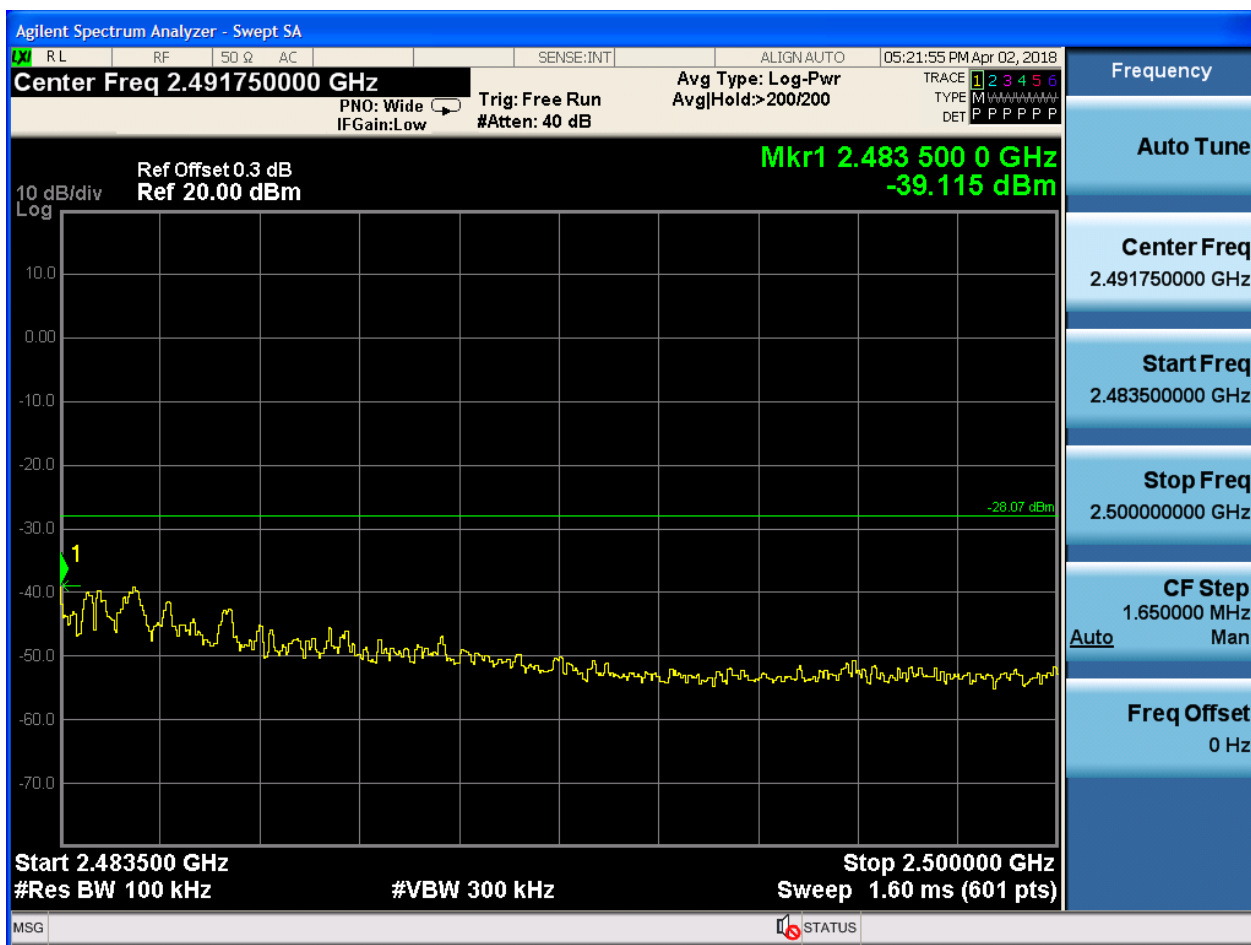







2.18 11N40_H_2452@Ant 1


Pref:


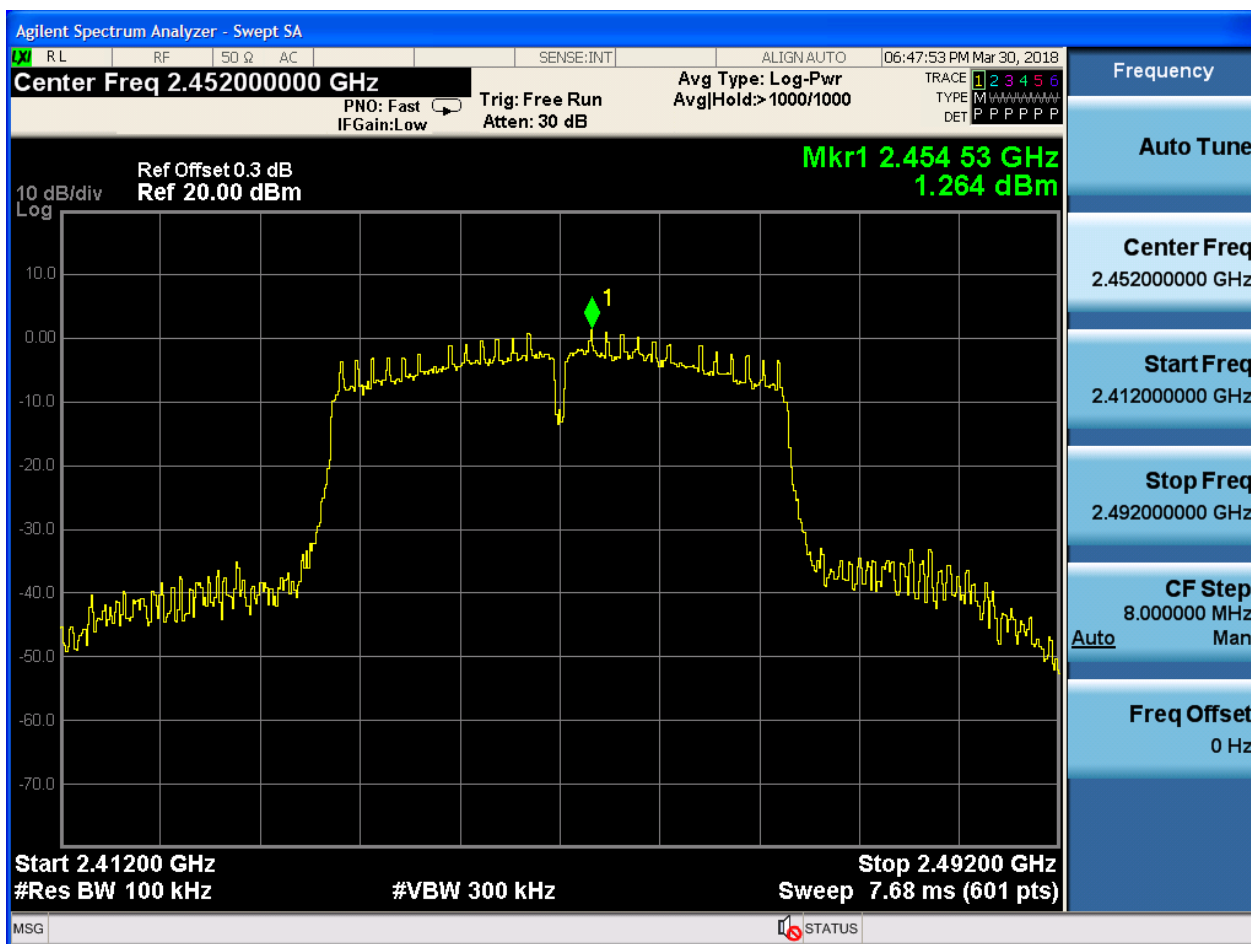







Puw:

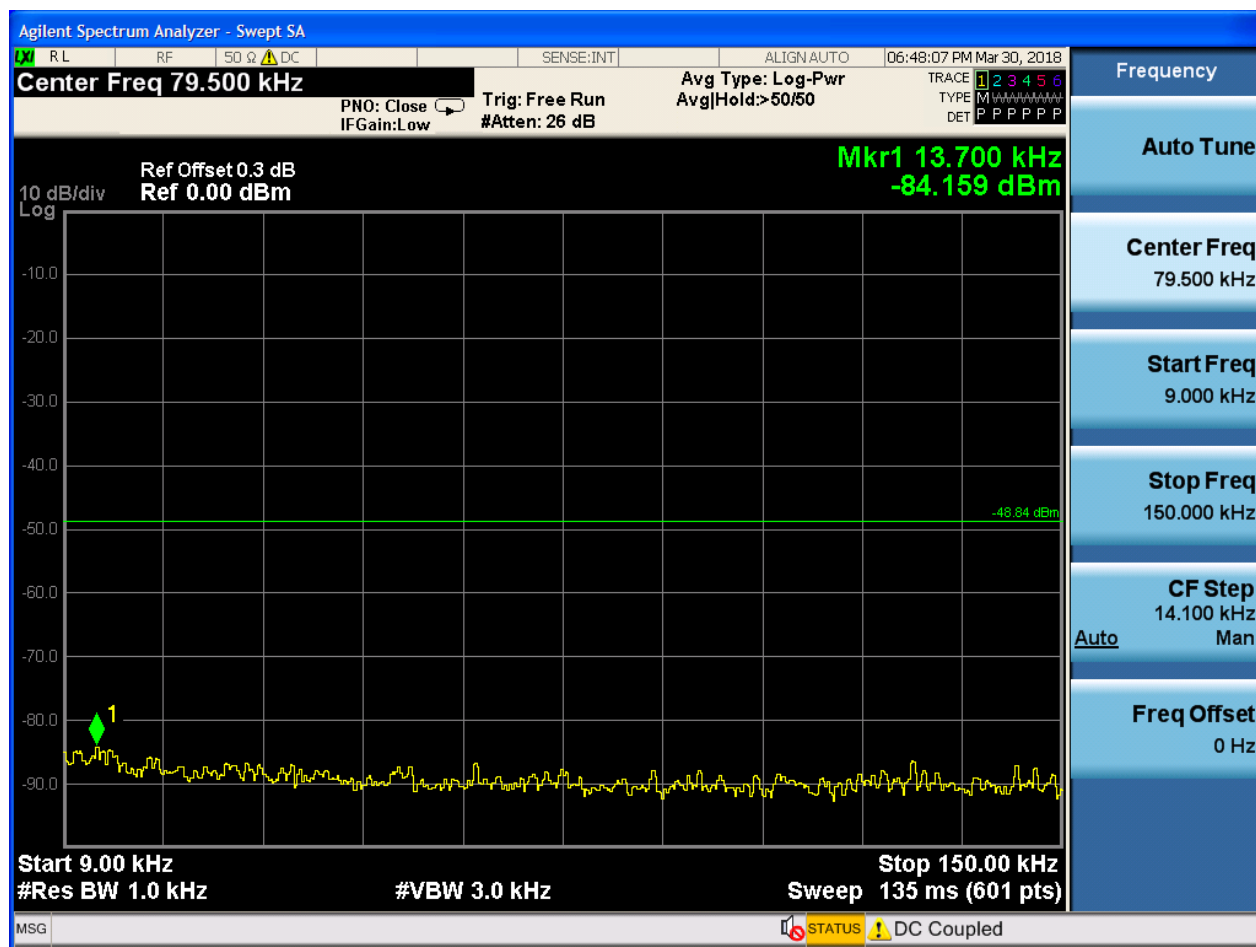


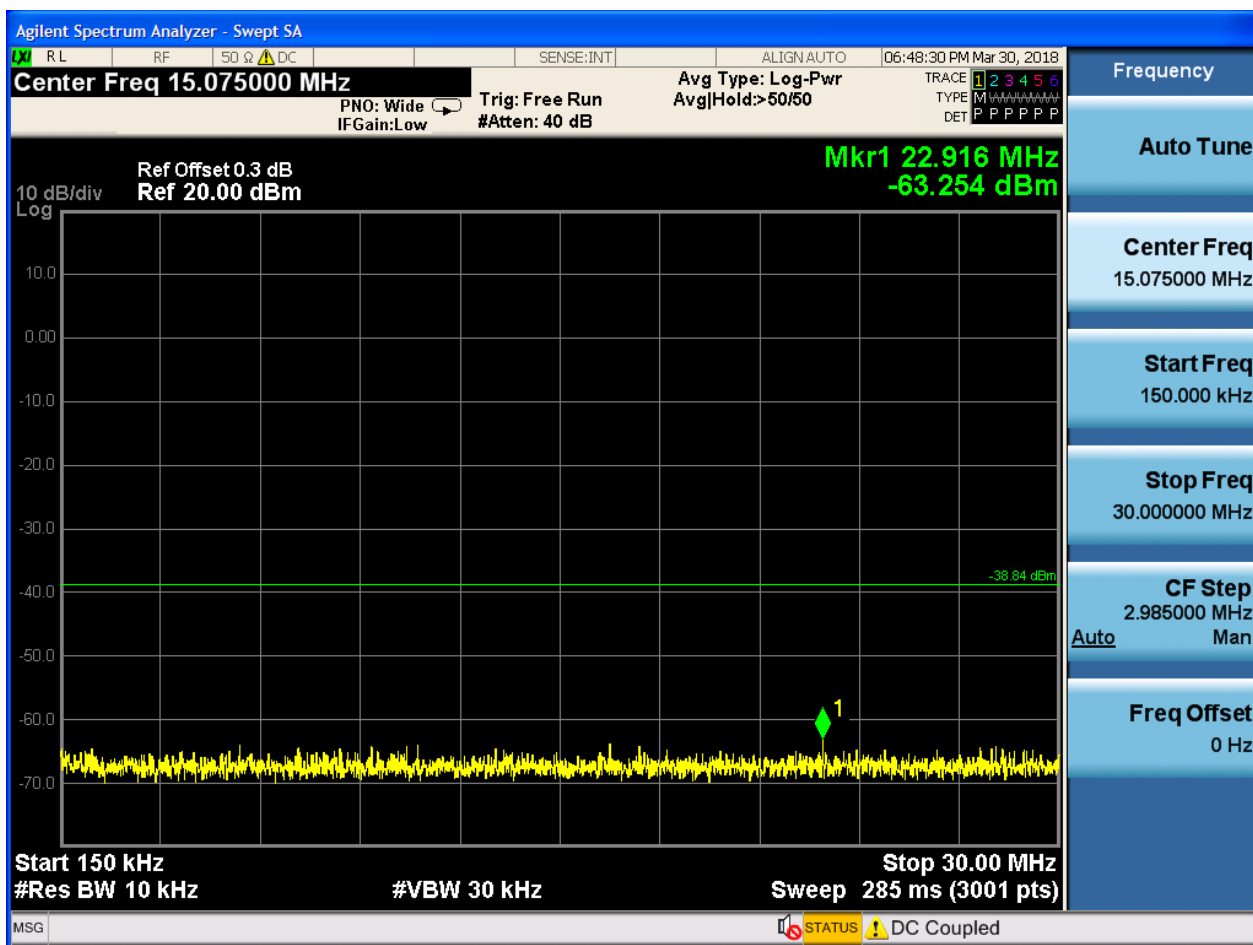



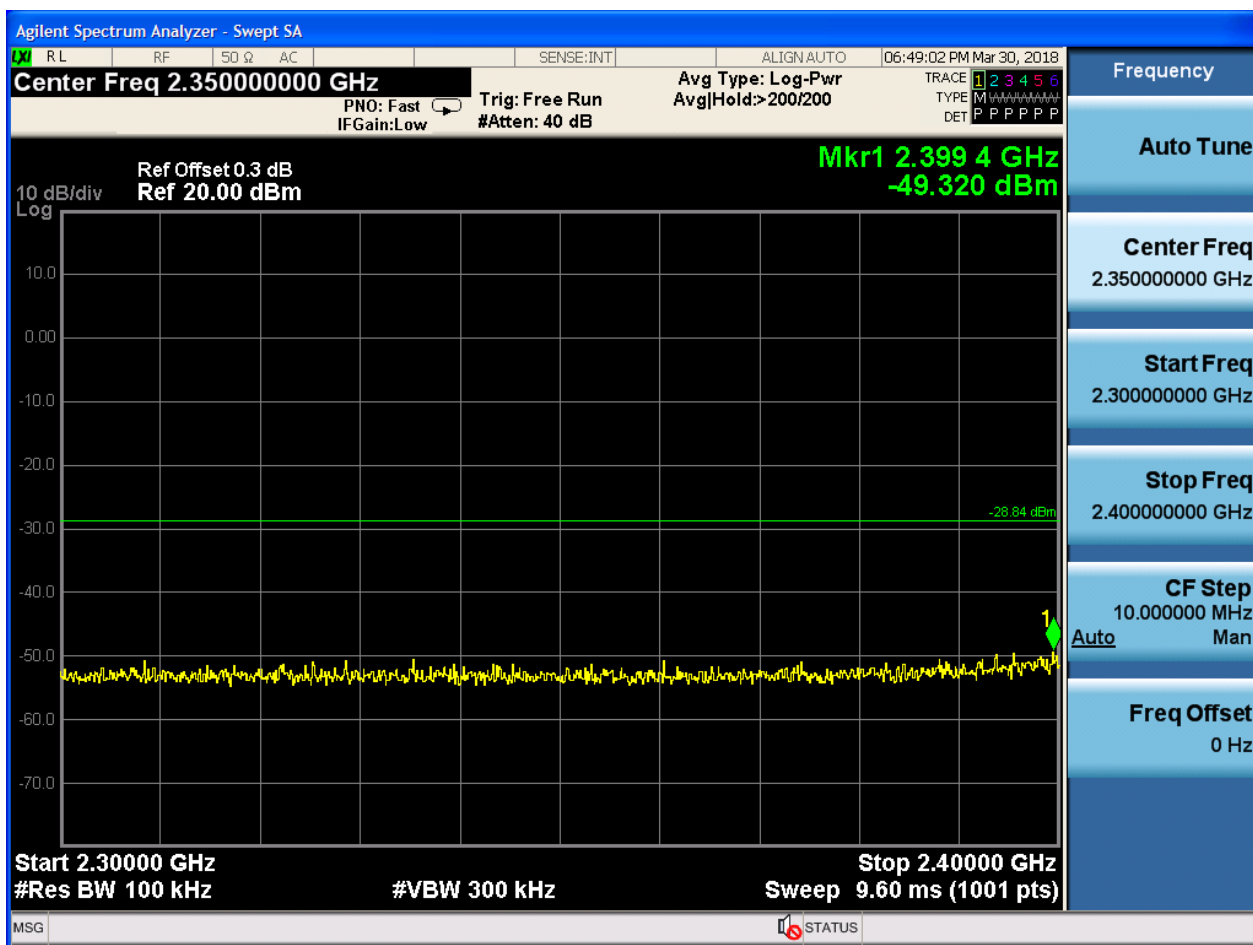



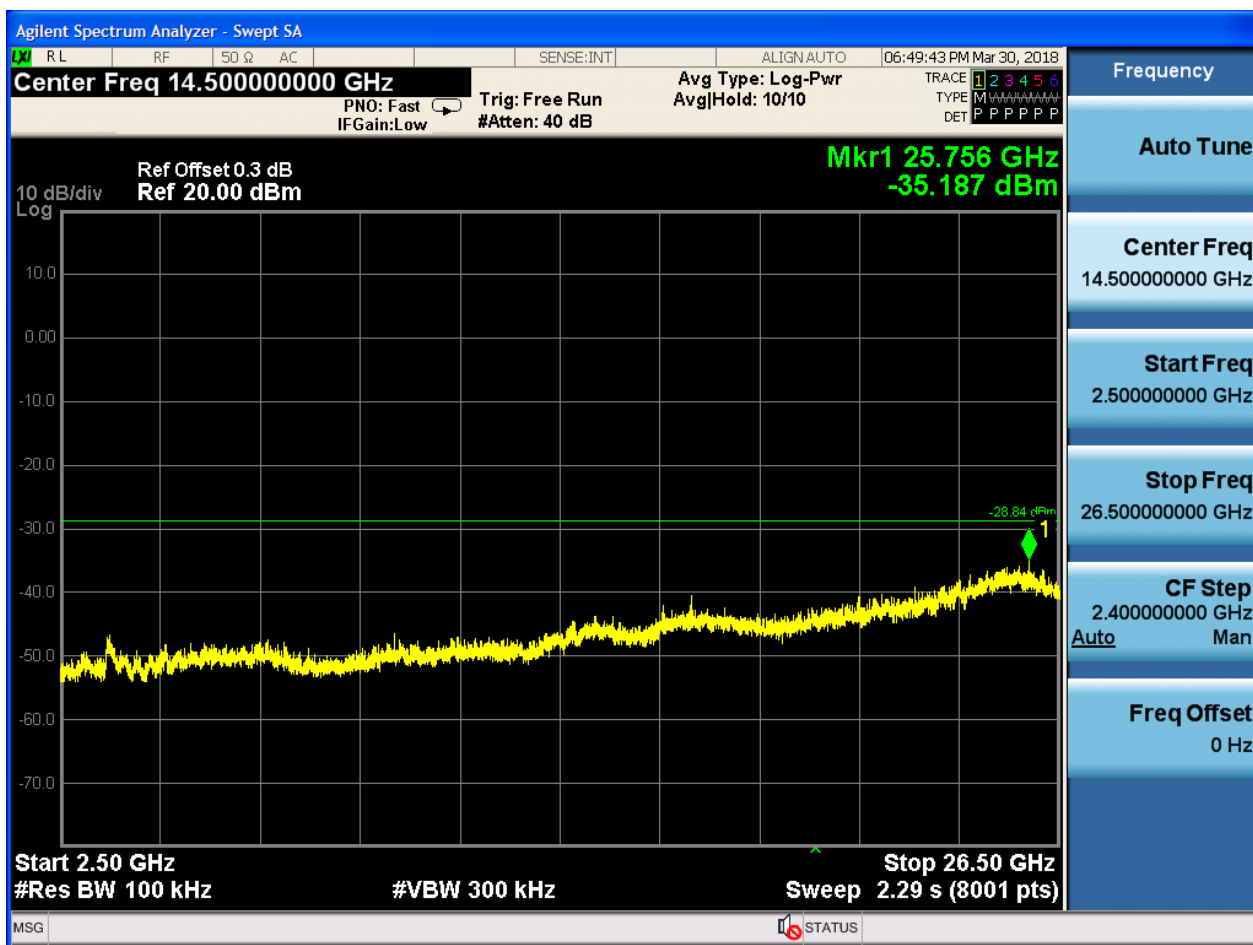

Appendix H: Radiated Spurious Emission & Spurious in Restricted Band

Note: We tested all modes, but the data presented below is the worst case.

Below 1GHz, RBW = 100 kHz, VBW = 300 kHz.

Above 1GHz, RBW = 1 MHz, VBW = 3 MHz.

The simultaneous transmission has been considered


1.1 Part 1: Testing Range of “9 kHz to 30MHz”

NOTE1: No peak found in the Test Range of “9 kHz to 30MHz”

1.2 Part 2: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.

Note 2: The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).

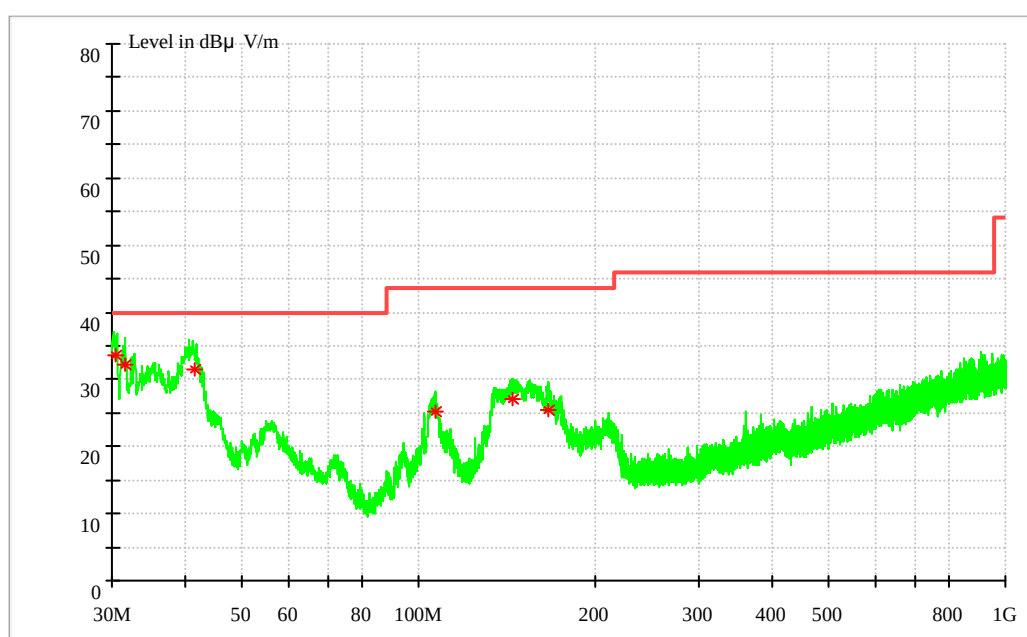

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
30.386068	33.65	40.00	6.35	100.0	H	51.0	13.6
31.600500	32.24	40.00	7.76	100.0	H	167.0	14.4
41.645480	31.59	40.00	8.41	100.0	H	110.0	17.4
106.436000	25.30	43.50	18.20	100.0	H	289.0	12.5
144.266000	27.02	43.50	16.48	100.0	H	315.0	13.0
165.848500	25.51	43.50	17.99	100.0	H	327.0	11.8

Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level


1.3Part 3: Testing Range of “1 GHz to 3 GHz”

- Note 1: The testing range of “1 GHz to 3 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.
- Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).
- Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.
- Test Mode:

1.3.1Test Mode: 11B

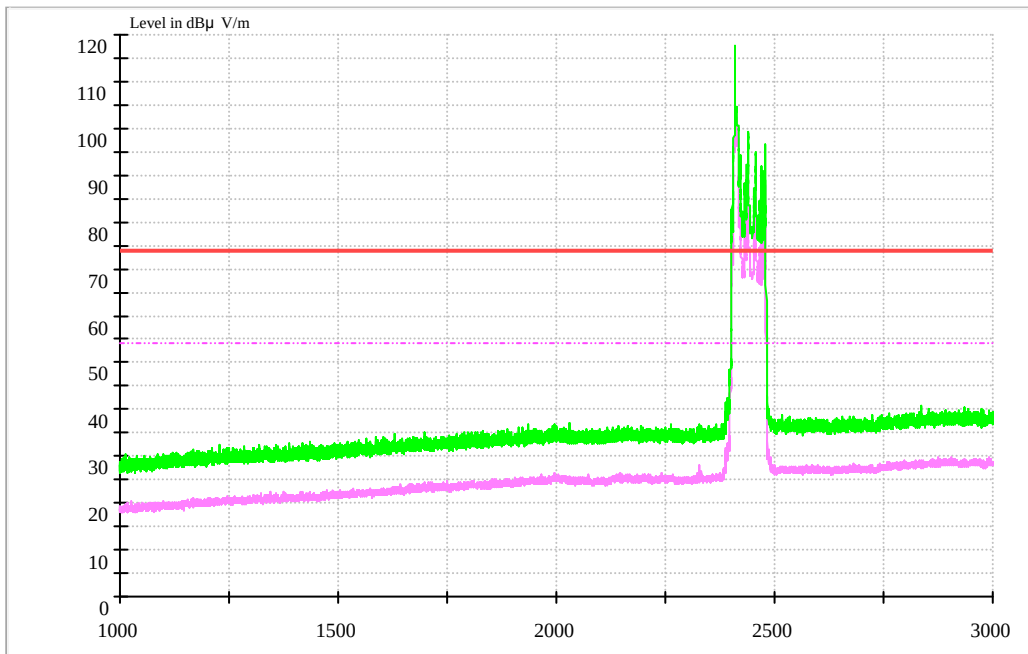

1.3.1.1 Channel 1 @Ant 1

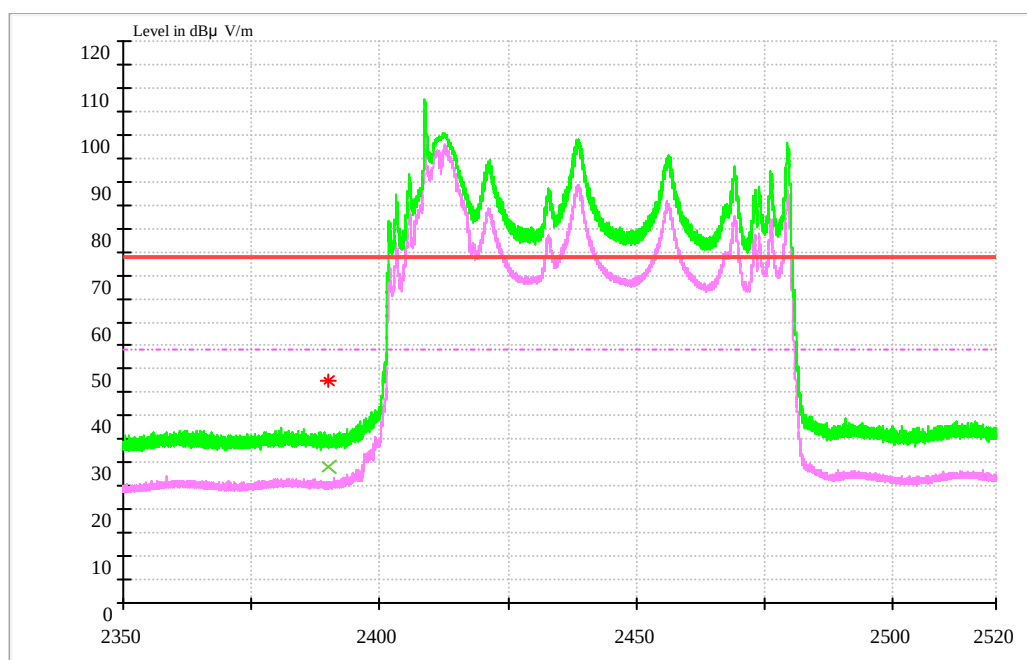

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	29.19	54.00	24.81	150.0	H	88.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	47.60	74.00	26.40	150.0	H	115.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.1.2 Channel 11@Ant 1

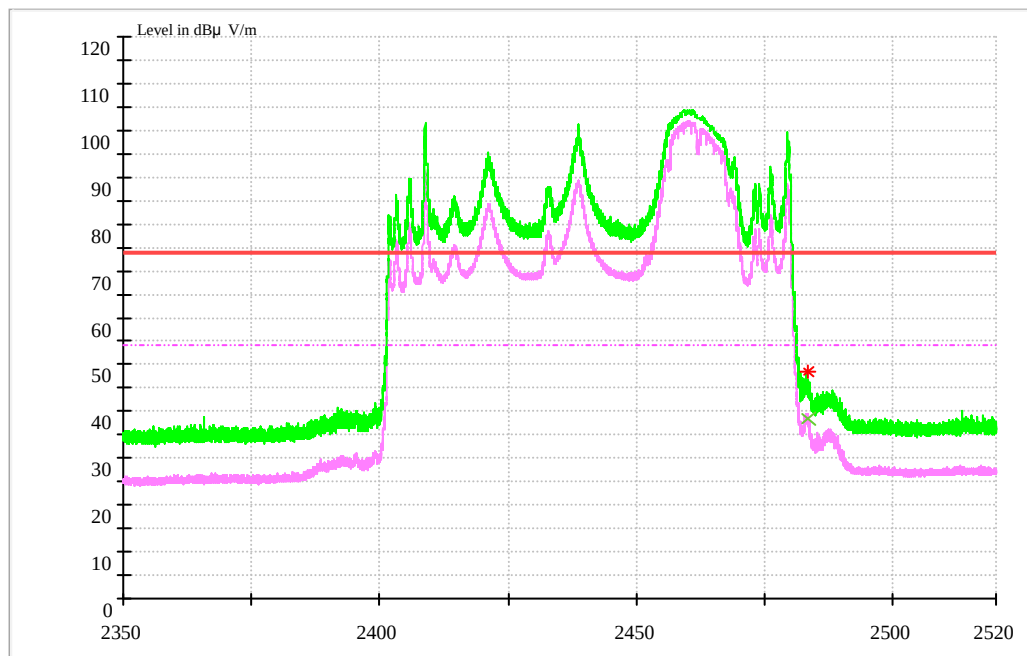

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	38.45	54.00	15.55	150.0	H	88.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	48.57	74.00	25.43	150.0	H	86.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2 Test Mode: 11G

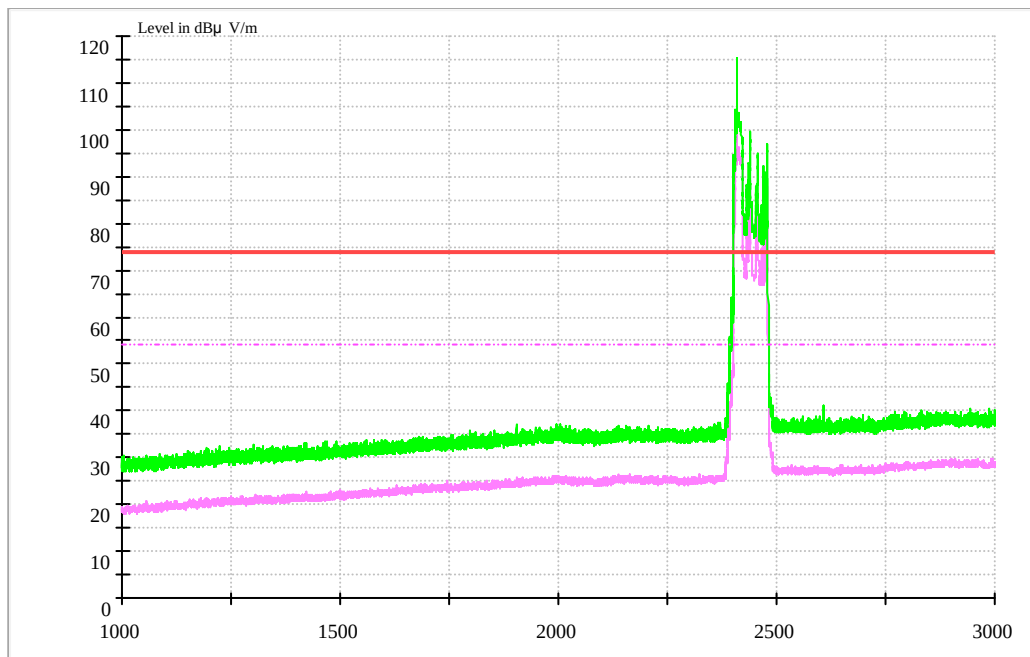

1.3.2.1 Channel 1 @Ant 1

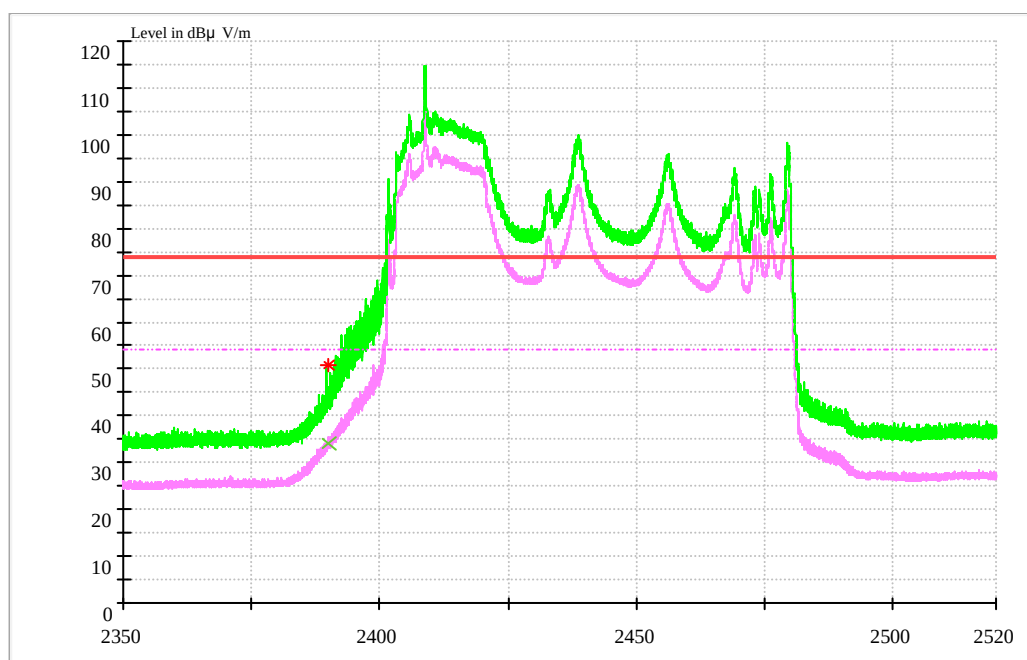

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	34.10	54.00	19.90	150.0	H	87.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	50.83	74.00	23.17	150.0	H	135.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.2 Channel 2 @Ant 1

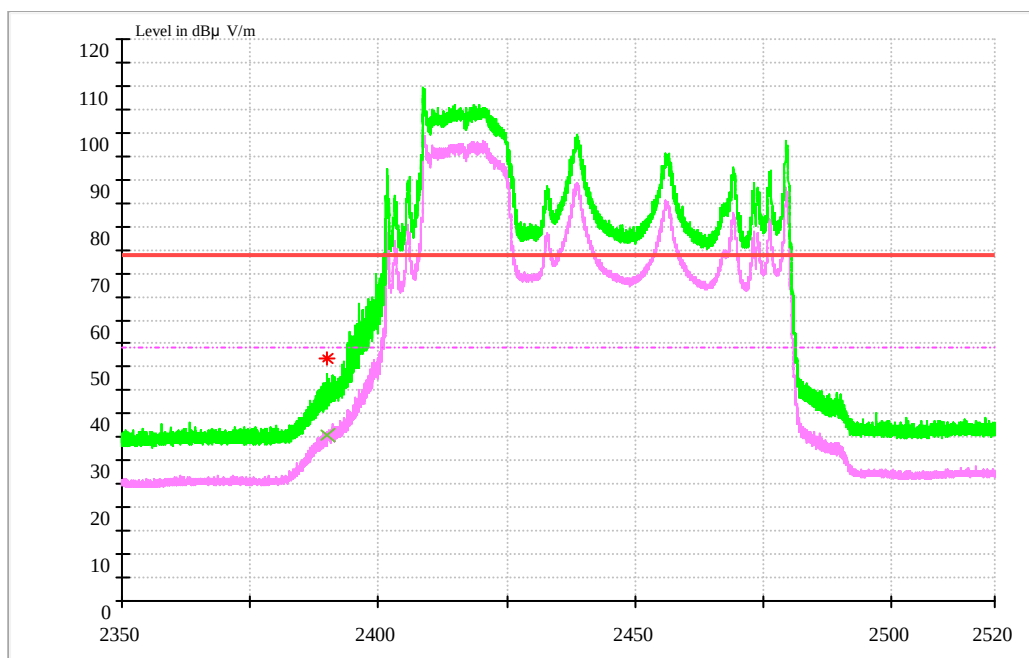

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	35.30	54.00	18.70	150.0	H	90.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	51.96	74.00	22.04	150.0	H	135.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.2.3 Channel 10 @Ant 1

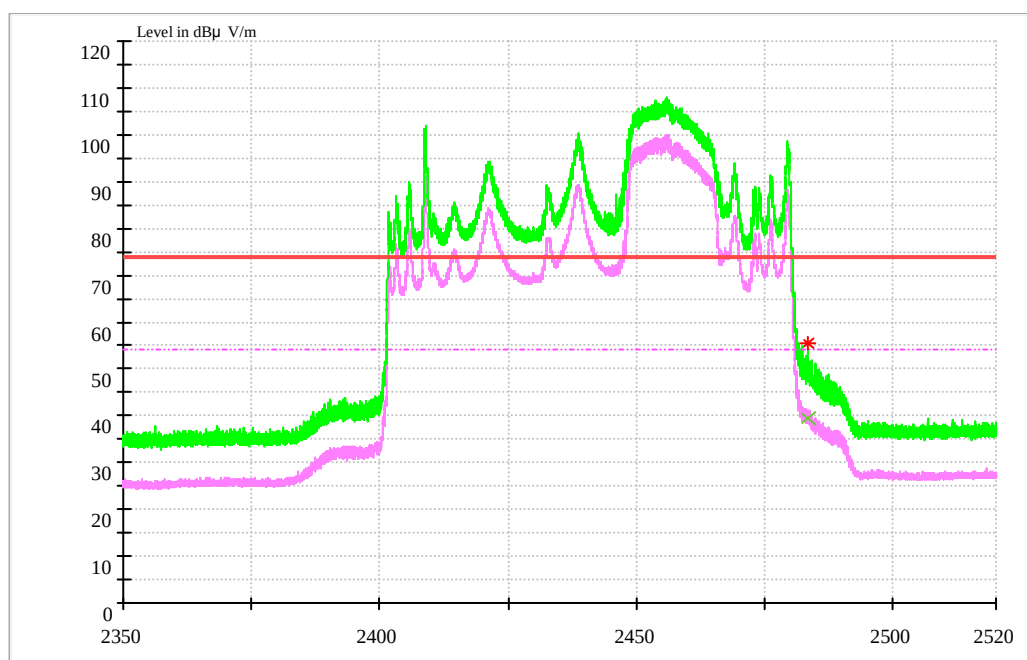

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	39.57	54.00	14.43	150.0	H	45.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	55.53	74.00	18.47	150.0	H	85.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.2.4 Channel 11 @Ant 1

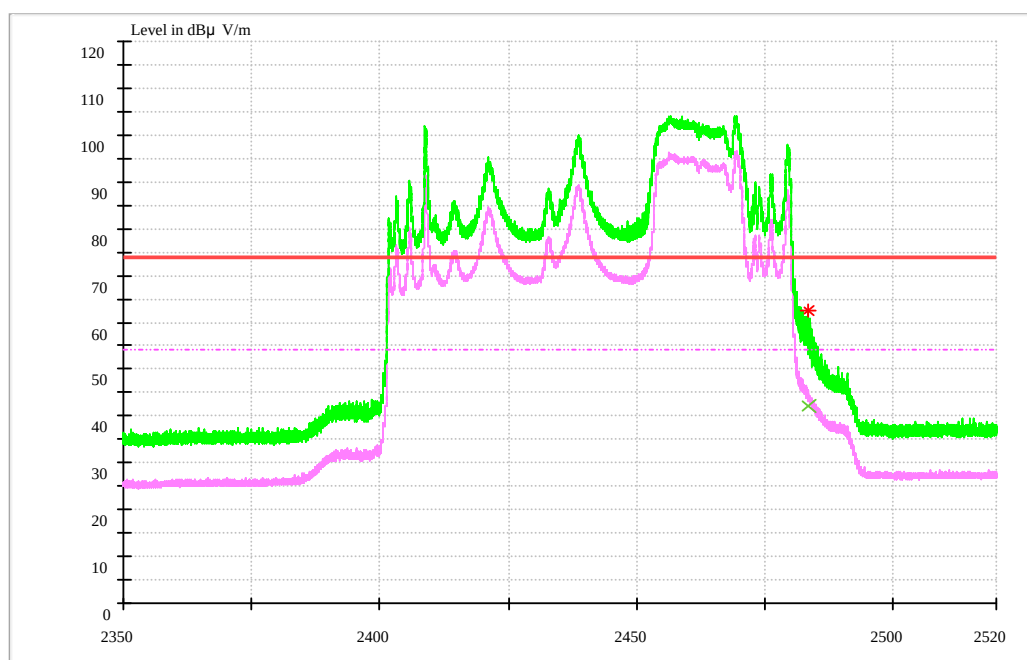

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	42.21	54.00	11.79	150.0	H	20.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	62.49	74.00	11.51	150.0	H	45.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)


The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3 Test Mode: 11N20

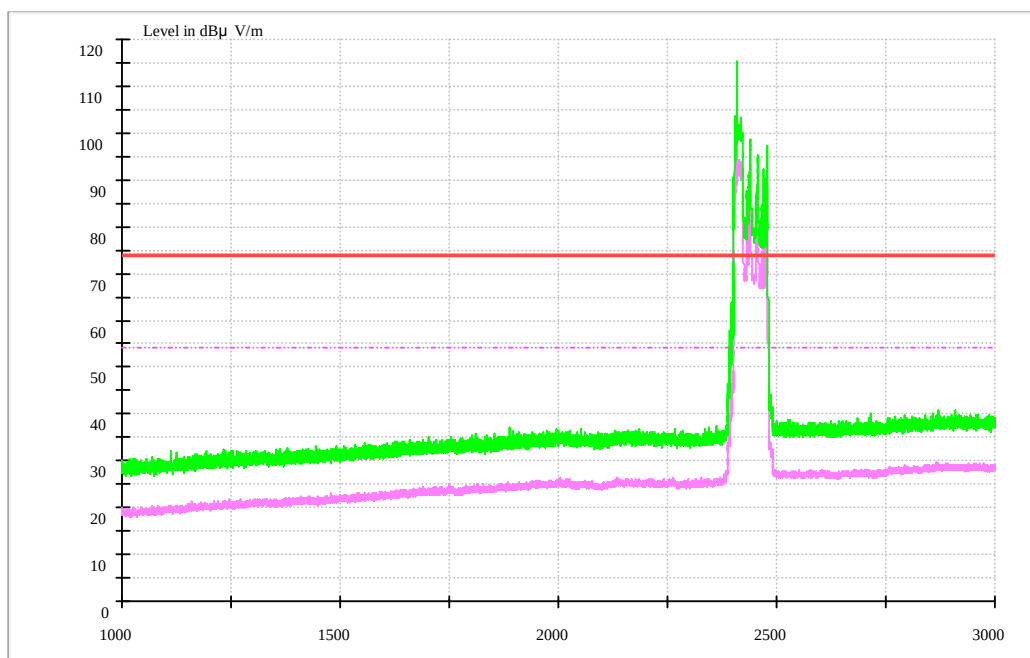

1.3.3.1 Channel 1 @Ant 1

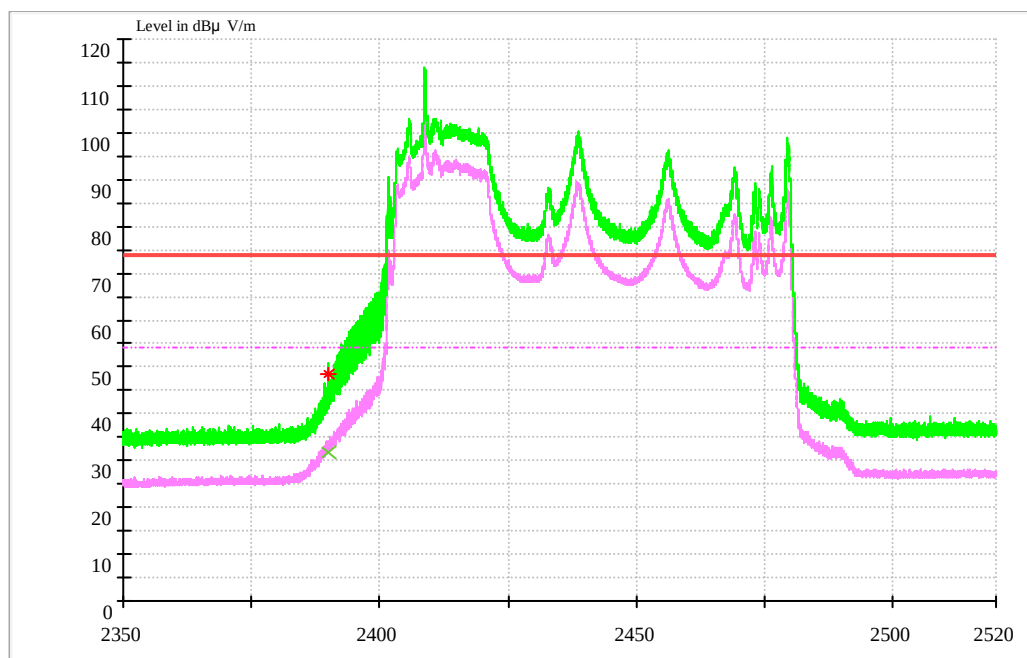

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	31.82	54.00	22.18	150.0	H	87.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	48.39	74.00	25.61	150.0	H	135.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

1.3.3.1 Channel 2 @Ant 1

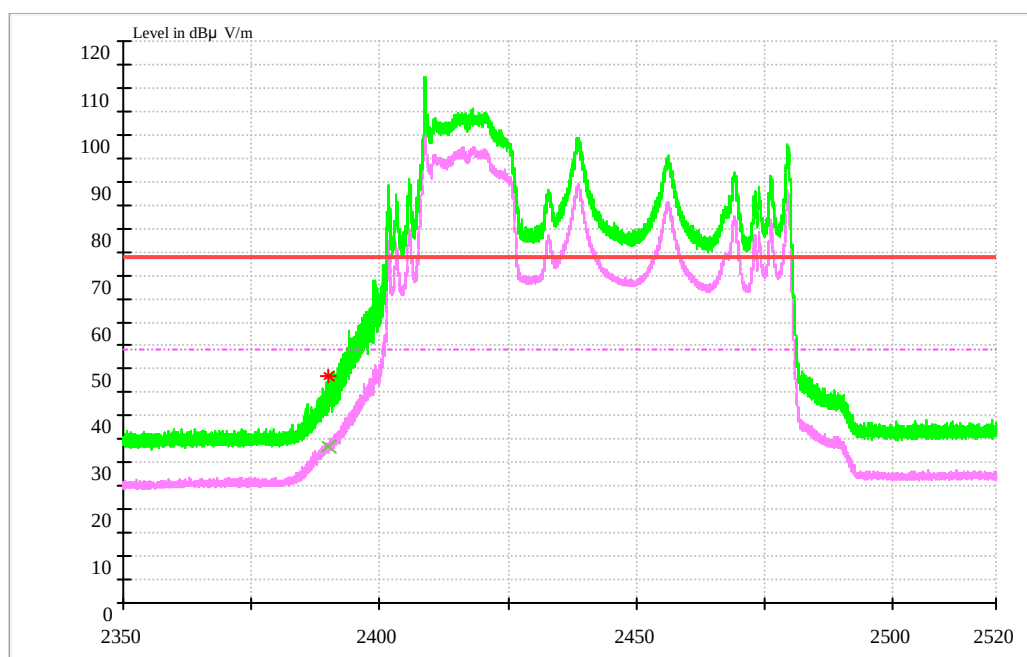

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	33.34	54.00	20.66	150.0	H	89.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	48.62	74.00	25.38	150.0	H	129.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.3.1 Channel 10 @Ant 1

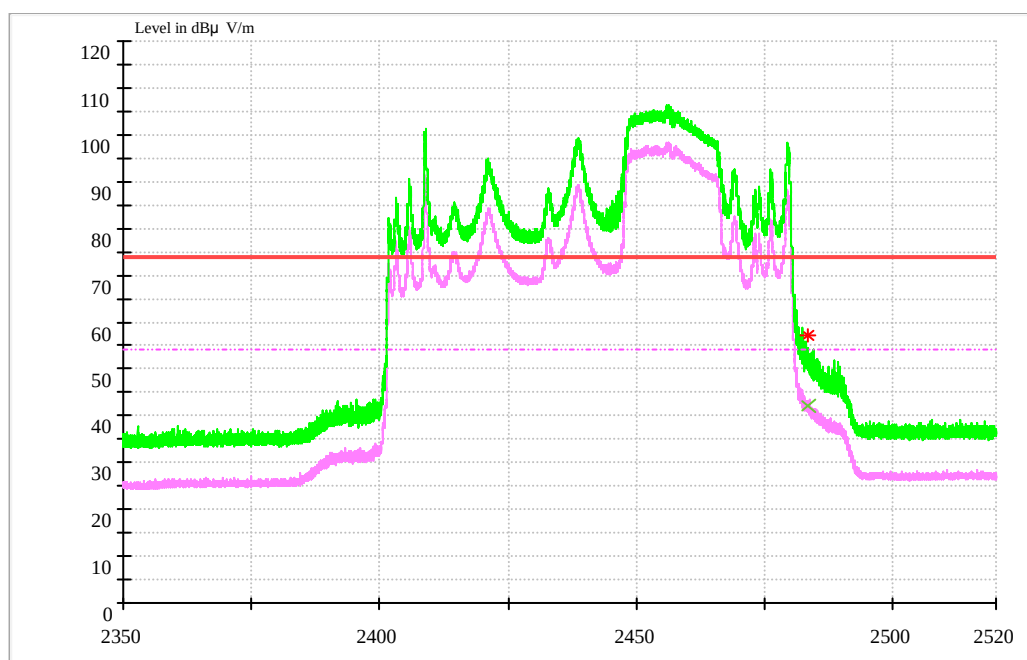

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	42.13	54.00	11.87	150.0	H	68.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	57.13	74.00	16.87	150.0	H	272.0	-6.8


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

1.3.3.2 Channel 11@Ant 1

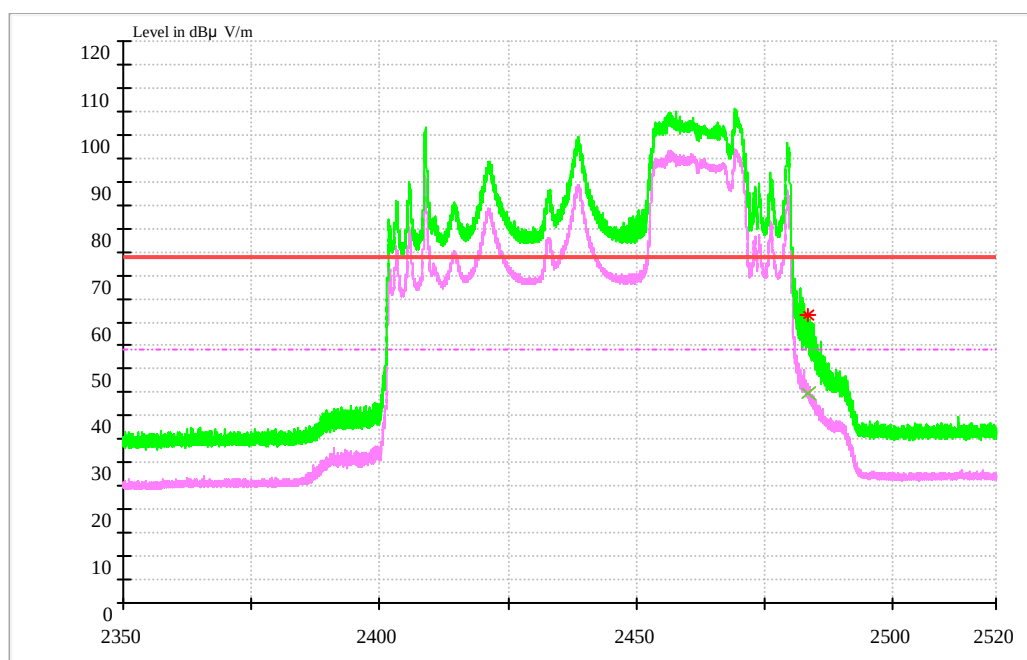

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.79	54.00	9.21	150.0	H	45.0	-6.8

MEASUREMENT RESULT: PK Detector


Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	61.43	74.00	12.57	150.0	H	135.0	-6.8

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit – Level

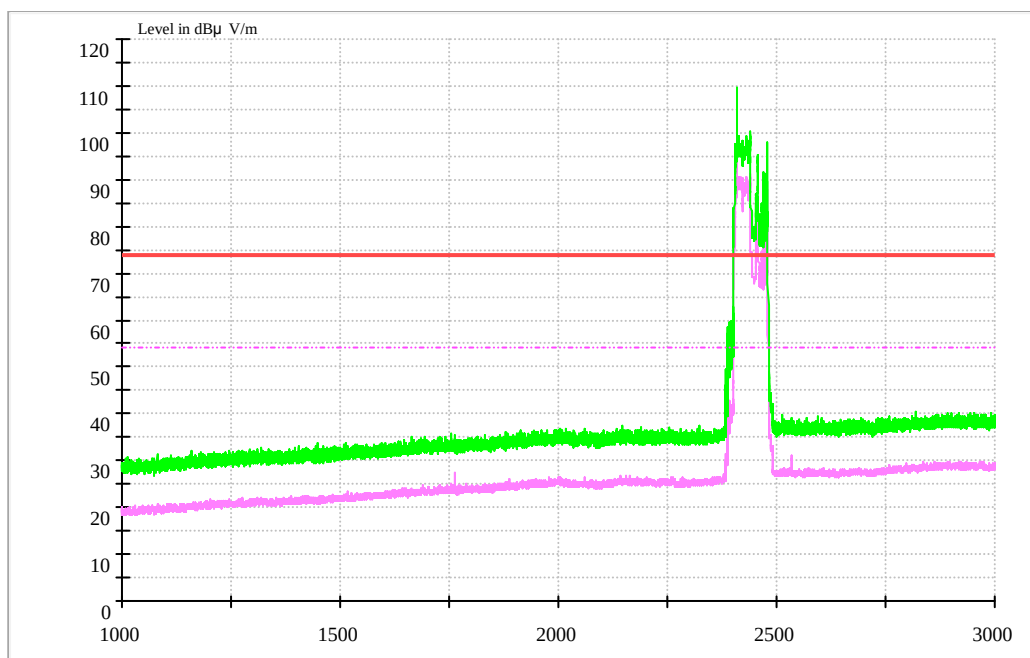1.3.4 Test Mode: 11N40

1.3.4.1 Channel 3 @Ant 1

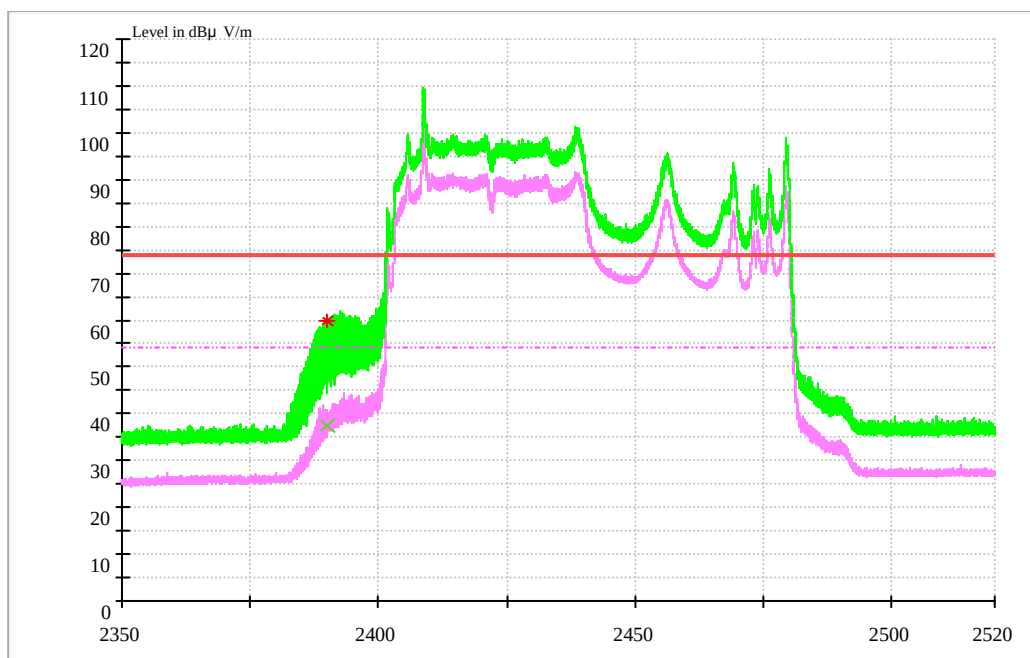

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390	37.37	54.00	16.63	150.0	H	100.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Transd. (dB)
2390	59.68	74.00	14.32	150.0	H	108.0	-10.2


Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit – Level

1.3.4.1 Channel 4 @Ant 1

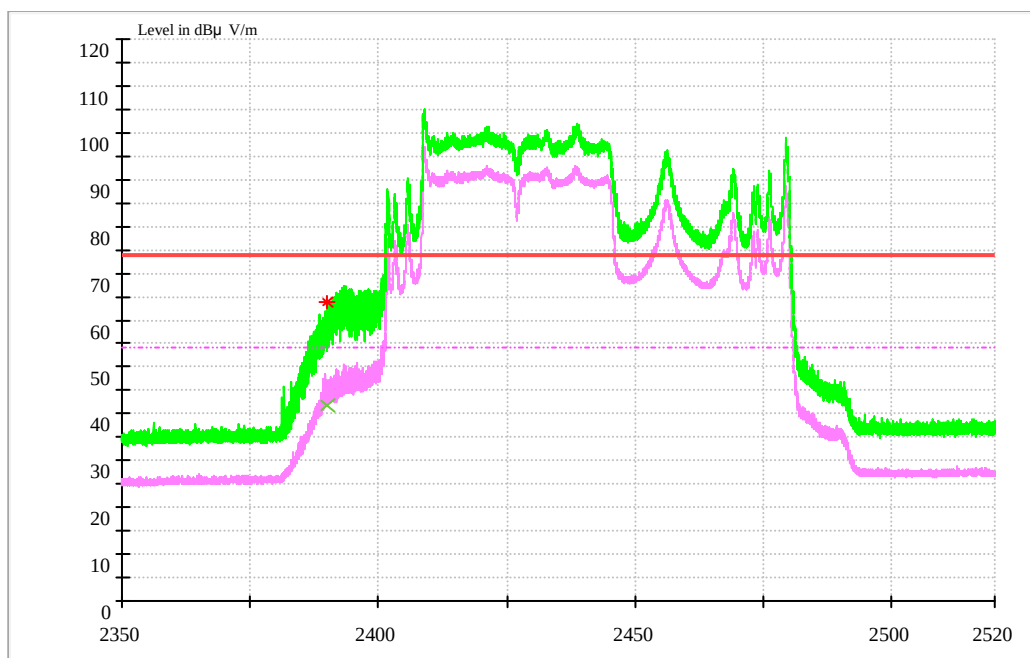

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	41.72	54.00	12.28	150.0	H	68.0	-10.2

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	63.73	74.00	10.27	150.0	H	151.0	-10.2


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.4.1 Channel 8 @Ant 1

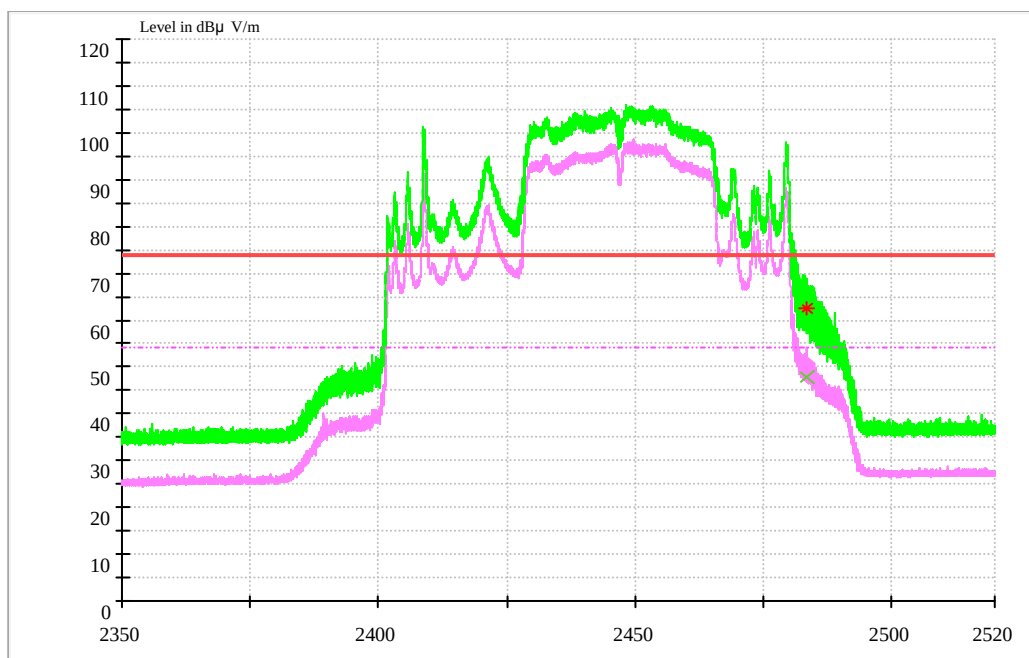

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2390	47.81	54.00	6.19	150.0	H	179.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2390	62.51	74.00	11.49	150.0	H	164.0	-6.8


Note:

1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin=Limit - Level

1.3.4.2 Channel 9@Ant 1

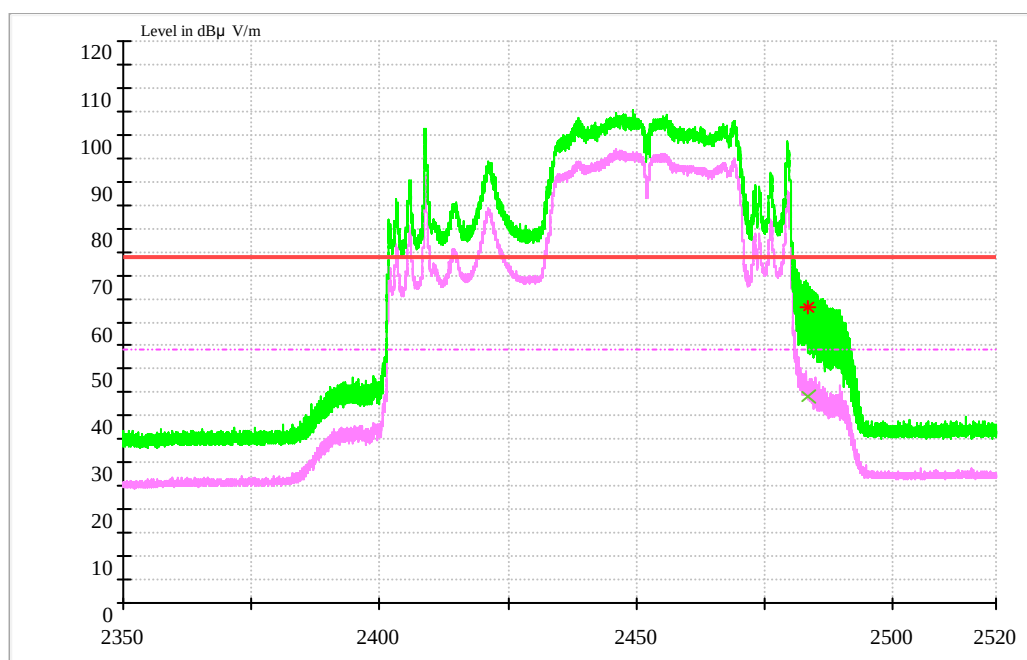

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h	Transd. (dB)
2483.5	44.00	54.00	10	150.0	H	147.0	-6.8

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth h (deg)	Transd. (dB)
2483.5	63.16	74.00	10.84	150.0	H	165.0	-6.8

Note:


1, Level =Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.


2, Margin=Limit - Level

1.4 Part 4: Testing Range of “3 GHz to 18 GHz”

- Note 1: The test results and plot for testing range of “3 GHz to 18 GHz” showed as below is the WORST case for all Test Modes and Channels. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “3 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

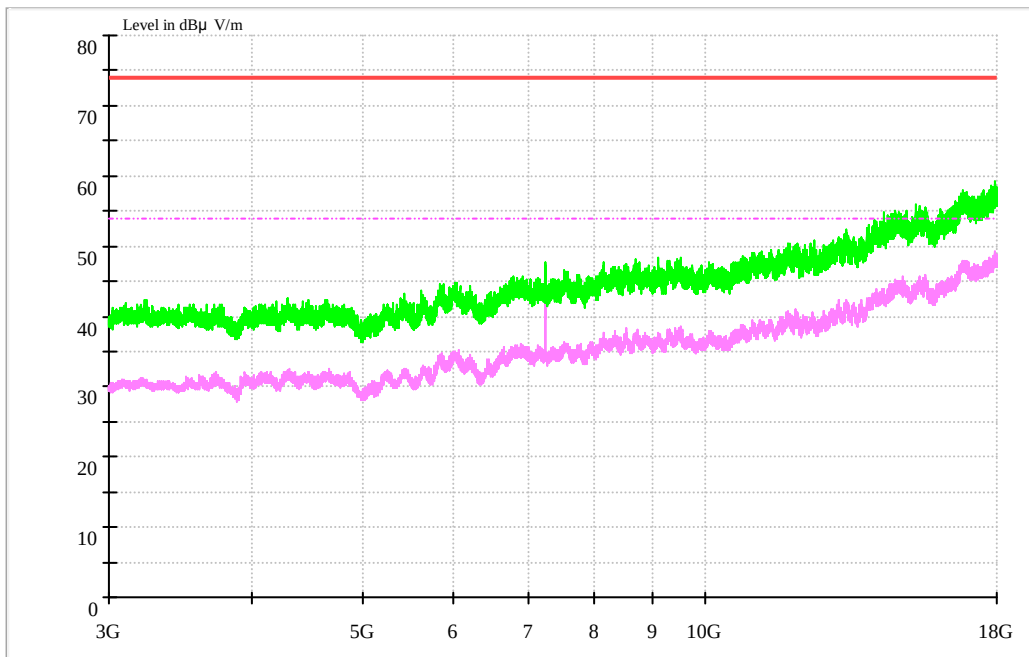


1.5 Part 5: Testing Range of “18 GHz to 26.5 GHz”

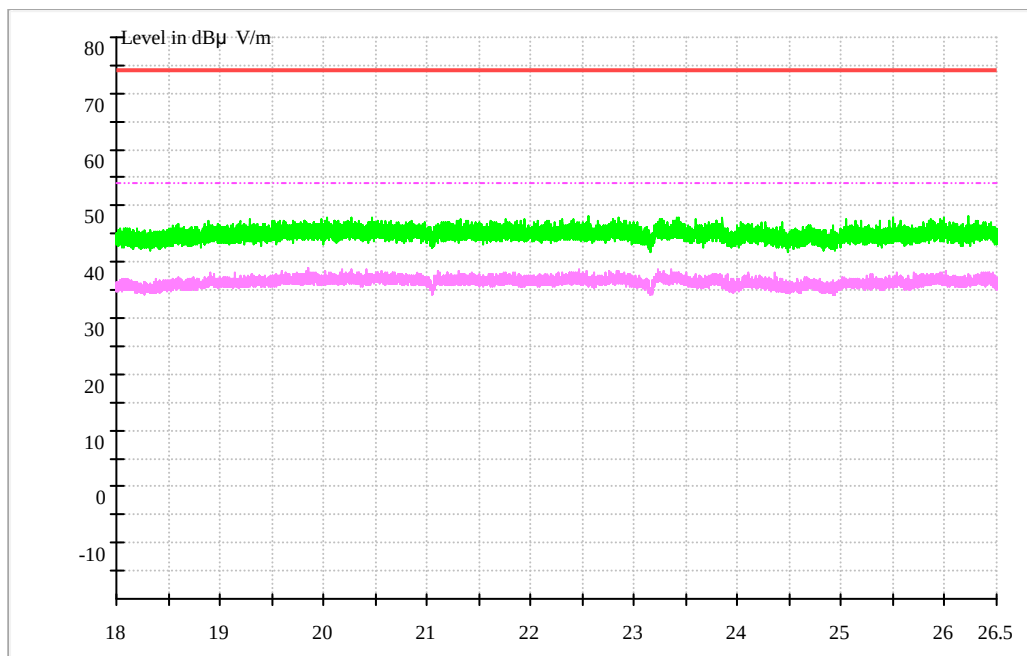

Appendix I: Conducted Emission at Power Port

Note: RBW =9 kHz, VBW = 30 kHz

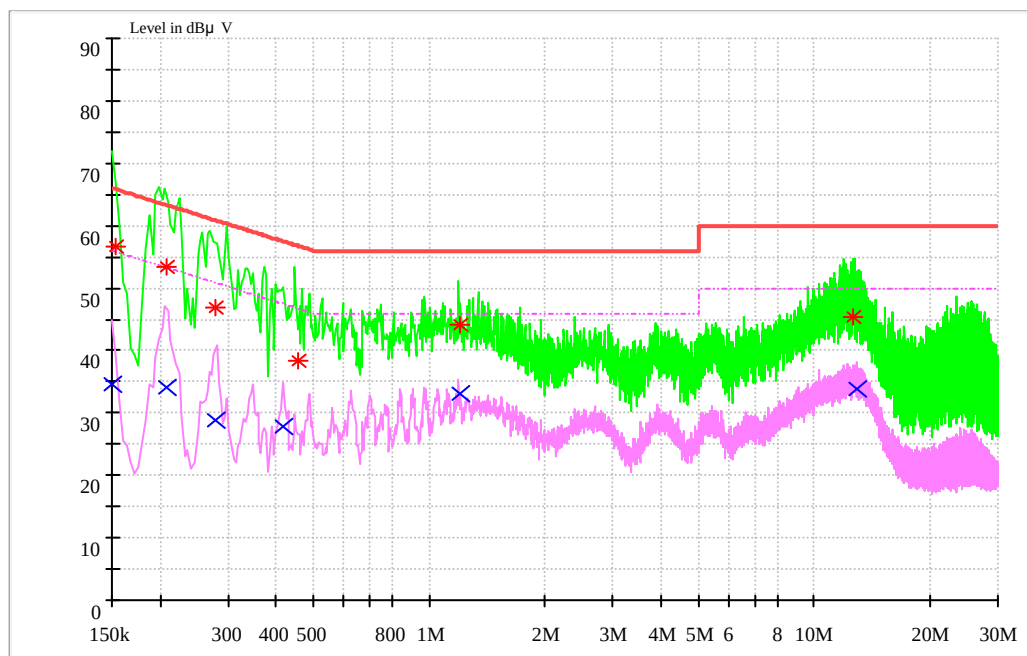

MEASUREMENT RESULT: AV Detector

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Transd. (dB)	Margin (dB)	Line	PE
0.150658	34.54	55.97	9.7	21.43	N	FLO
0.208534	34.13	53.27	9.7	19.14	N	FLO
0.278886	28.94	50.85	9.7	21.91	N	FLO
0.417746	27.76	47.49	9.7	19.73	N	FLO
1.201689	33.07	46	9.7	12.93	L1	FLO
12.97358	33.92	50	10	16.08	L1	FLO

MEASUREMENT RESULT: PK Detector

Frequency (MHz)	Level (dBμV)	Limit (dBμV)	Transd. (dB)	Margin (dB)	Line	PE
0.152578	56.71	65.86	9.7	9.15	N	FLO
0.208665	53.37	63.26	9.7	9.89	N	FLO
0.277873	46.78	60.88	9.7	14.1	N	FLO
0.455189	38.27	56.78	9.7	18.51	N	FLO
1.201763	44.03	56	9.7	11.97	L1	FLO
12.64422	45.36	60	10	14.64	L1	FLO



Note:

1, Level = Reading level by receiver + Transd (Antenna factor + cable loss – preamplifier gain)

The reading level is calculated by software which is not shown in the sheet.

2, Margin = Limit - Level

END