



FCC Test Report

Product Name: HSPA USB Stick

Model Number: E1756

Report No: SYBH(R) E074062009EB-2
FCC ID: QISE1756

Reliability Laboratory of Huawei Technologies Co., Ltd.

Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R. China

Tel: +86 755 28780808 Fax: +86 755 89652518



Notice

1. The laboratory has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS), and accreditation number: L0310.
2. The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3. The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4. The laboratory has been listed by industry Canada to perform electromagnetic emission measurement. The site recognition number is 6369A-1.
5. The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is R2364, C2583, and T256.
6. The test report is invalid if not marked with "exclusive stamp for the test report".
7. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8. The test report is invalid if there is any evidence of erasure and/or falsification.
9. If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10. Normally, the test report is only responsible for the samples that have undergone the test.
11. Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



Huawei Technologies Co Ltd

Huawei Industrial Base,
Bantian Longgang
Shenzhen 518128, P.R China
Tel: +86 755 89651014
Fax: +86 755 89652518



REPORT ON **FCC Test of HSPA USB Stick**

 M/N: E1756

 Report No: SYBH(R) E074062009EB-2

REGULATION **FCC CFR47 Part 2: Subpart J;**

 FCC CFR47 Part 22: Subpart H;

 FCC CFR47 Part 24: Subpart E;

CONCLUSION **Pass**

General Manager Jul. 27, 2009 张兴海 
Date Name signature

Technical Responsibility For Area of Testing Jul. 27, 2009 余 辉 
Date Name signature

Test Lab Engineer Jul. 27, 2009 胡 俊 
Date Name signature



Contents

1	<u>Summary</u>	5
2	<u>Product Description</u>	6
2.1	PRODUCTION INFORMATION	6
2.2	MODIFICATION INFORMATION.....	6
3	<u>Test Site Description</u>	7
3.1	TESTING PERIOD	7
3.2	GENERAL SET UP DESCRIPTION	7
4	<u>Product Description</u>	8
4.1	TECHNICAL CHARACTERISTICS	8
4.2	EUT IDENTIFICATION LIST	10
5	<u>Main Test Instruments</u>	11
6	<u>Transmitter Measurements</u>	12
6.1	<u>PART 850M BAND</u>	12
6.2	<u>PART 1900M BAND</u>	35
7	<u>System Measurement Uncertainty</u>	58
8	<u>Appendices</u>	59



1 Summary

The table below summarizes the measurements and results for the HUAWEI E1756 USB Stick. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
850M Band			
2.1046	22.913	Effective Radiated Power of Transmitter	PASS
2.1046	22.913	Conducted Power of Transmitter	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	22.917	Band Edges compliance	PASS
2.1051	22.917	Spurious Emission at Antenna Terminal	PASS
2.1055	22.355	Frequency Stability	PASS
2.1053	22.917	Radiated Spurious Emissions	PASS
1900M Band			
2.1046	24.232	Effective Radiated Power of Transmitter	PASS
2.1046	24.232	Conducted Power of Transmitter	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	24.238	Band Edges Compliance	PASS
2.1051	24.238	Spurious Emission at Antenna Terminal	PASS
2.1055	24.235	Frequency Stability	PASS
2.1053	24.238	Radiated Spurious Emissions	See Note

Note: The Radiated Spurious Emissions' test results are shown in the EMC report.

2 Product Description

2.1 Production Information

2.1.1 General Description

HUAWEI E1756 USB Stick is subscriber equipment in the GSM/UMTS system. The frequency band is 850M and 1900M. The E1756 implements such functions as RF signal receiving / Transmitting, HSUPA/HSDPA/WCDMA/EDGE/GPRS/GSM protocol processing and data service etc. Externally it provides USB interface (to connect to the notebook etc.), USIM card interface. It has an internal antenna. E1756 uses Qualcomm MSM6290 chipset and Zero-IF technologies.

2.1.2 Support function and Service

The HUAWEI E1756 USB Stick support the function and service as follows:

Table 2 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: GMSK	TM1	GPRS/GSM
Data	Modulation: 8PSK	TM2	EDGE
Data	Modulation: QPSK	TM3	WCDMA
Data	Modulation: QPSK	TM4	HSDPA
Data	Modulation: QPSK	TM5	HSUPA

Note: * The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V5.4.0 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V5.4.0. The WCDMA test condition & settings are defined in 3GPP TS 34.121 V7.5.0:2007.

2.2 Modification Information

For original equipment, following table is not application.

Table 3 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				



3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

3.1 Testing Period

The test have been performed during the period of

Jul. 9, 2009 – Jul. 25, 2009

3.2 General Set up Description

HUAWEI E1756 USB Stick can support GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA mode and 850M Band and 1900M. During this measurement, the HUAWEI E1756 USB Stick just works in GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA mode and 850M Band/1900M Band.

- TM1:** GPRS/GSM Mode with GMSK Modulation
- TM2:** EDGE Mode with 8PSK Modulation
- TM3:** WCDMA Mode with QPSK Modulation
- TM4:** HSDPA Mode with QPSK Modulation
- TM5:** HSUPA Mode with QPSK Modulation



4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Table 4 Frequency Range

850M Band	
Uplink band:	824 to 849 MHz
Downlink band:	869 to 894 MHz
1900M Band	
Uplink band:	1850 to 1910 MHz
Downlink band:	1930 to 1990 MHz

4.1.2 Channel Spacing / Separation

Table 5 Channel Spacing / Separation

	EDGE/GPRS/GSM	WCDMA/HSDPA/HSUPA
Channel Raster	200k Hz	200k Hz
Channel spacing:	200k Hz	5MHz

4.1.3 Type of Emission

Table 6 Type of Emission

	EDGE/GPRS/GSM	WCDMA/HSDPA/HSUPA
Emission Designation:	300KG7W / 300KGXW	5M0F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Table 7 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

4.1.5 Power Source

Table 8 Power Source

DC voltage nominal:	 5.0V; Supplied by USB port of notebook
DC voltage range	 4.75-5.25V
DC current maximal:	500mA

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 9 Applied RF Module DC Voltages and Currents

Voltage:	 2.85V (for the RF IC)
Current:	150mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)
Voltage:	 3.6V (for the PA module)
Current:	350mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)



4.2 EUT Identification List

4.2.1 Board Information

Table 10 Board Information

HSPA USB Stick		
E1756		
Board and Module		
Model name	Serial Number	Remarks
E1756	LG2AB10960100355	CD6BTCPU

4.2.2 Adapter Technical Data

No Applicable.

4.2.3 Battery Technical Data

No Applicable.

4.2.4 FCC Identification

Grantee Code: QIS
Product Code: E1756
FCC Identification: QISE1756



5 Main Test Instruments

Table 11 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until (MM.DD.YYYY)
EMI Test receiver	R&S	ESIB 26	100318	4.22, 2010
Broadband Antenna	Schaffner	CBL 6112B	2747	11.10, 2009
Horn Antenna	ETS-Lindgren	3117	00062553	9.27.2009
DC power supply	Schwarzbeck	D69250- UHAP/D69250-VHAP	979/917	11.20.2009
Signal Generator	R&S	SMR 40	100325	5.12, 2010
Signal Generator	R&S	SMU200A	101717	04.10.2010
Power Supply	Agilent	66311B	MY43006371	04.26.2010
Climate Chamber	WEISS	ACS-1	9777	08.13.2009
Universal Radio Communication Tester	R&S	CMU200	113164	06.17.2010
Spectrum Analyzer	R&S	FSU26	200002	04.29.2010



6 Transmitter Measurements

6.1 Part 850M Band

6.1.1 Effective Radiated Power of Transmitter (ERP)

6.1.1.1 Test Conditions

Table 12 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at Channel Bottom, Middle, Top

6.1.1.2 Test Specifications and Limits

6.1.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 22.913

6.1.1.2.2 Supporting Standards

Table 13 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.1.2.3 Limits

Compliance with part 22.913, mobile/portable stations are limited to 7 watts ERP peak power.
 $W \text{ (dBm)} = 10 \cdot \log(W_{\text{in mW}})$.

Table 14 Limits


Maximum Output Power (Watts)	< 7 Watts
Maximum Output Power (dBm)	< 38.5 dBm

6.1.1.3 Test Method and Setup

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the HUAWEI E1756 USB Stick to the wireless communication tester CMU200 via the air interface. The band is set as 850M.
- (b) Test the Radiated maximum output power by the CMU200 received from test antenna.
- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

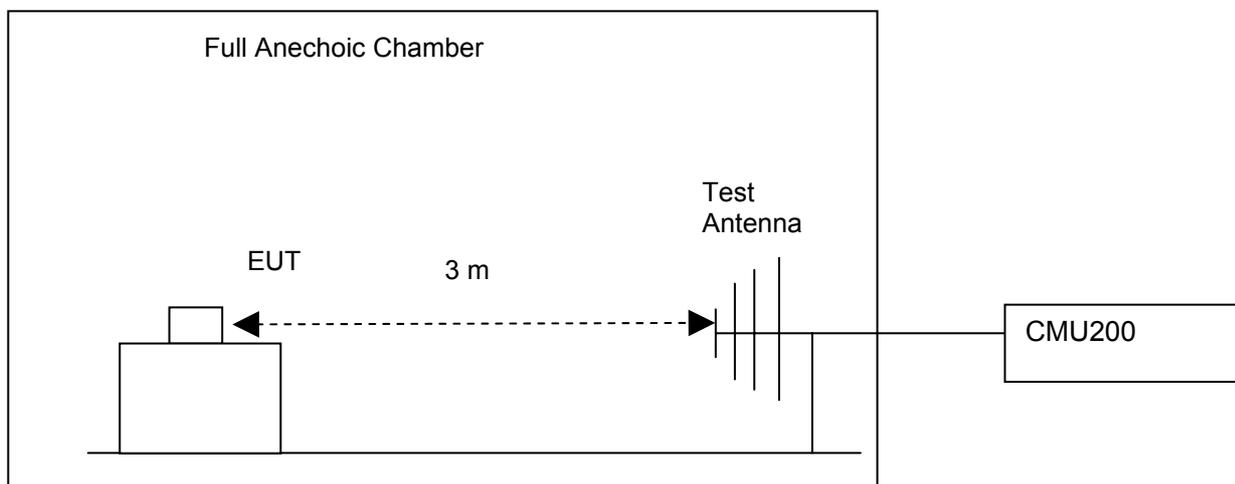

Step 2: Substitution method to verify the maximum ERP

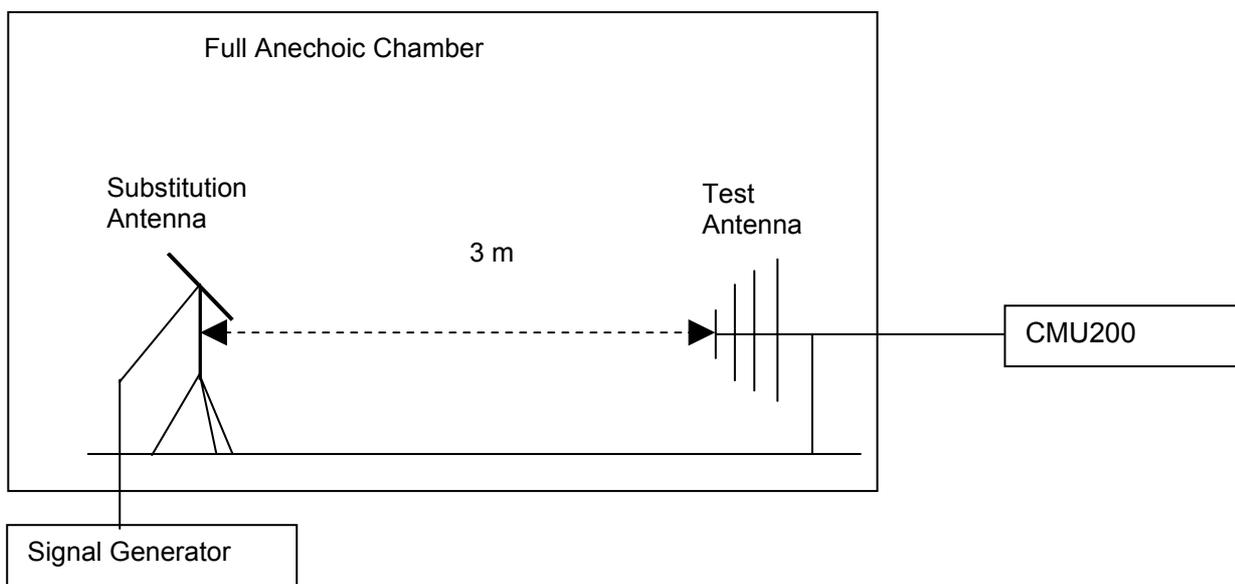


Figure 1. Test Set-up



NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

ERP was measured using 1 host.

BenQ Joy book S72

6.1.1.4 Measurement Results

6.1.1.4.1 Pre-test Results

For HSDPA test mode, there are 4 sub-tests for different configuration. For the sub-test 1, the max power of E1756 is the maximum as followed table.

The channel is mid range.

HSDPA conducted max power pre-scan

Sub-test	c	d	d (SF)	c/d	HS (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)	Test result
1	2/15	15/15	64	2/15	4/15	0	0	21.23
2	12/15	15/15	64	12/15	24/15	1	0	20.90
3	15/15	8/15	64	8/15	30/15	1.5	0.5	20.85
4	15/15	4/15	64	4/15	30/15	1.5	0.5	20.89

For HSUPA test mode, there are 5 sub-tests for different configuration. For the sub-test 1, the max power of E1756 is the maximum as followed table.

The channel is mid range.

HSUPA conducted max power pre-scan

Sub-test	bc	bd	bd (SF)	bc/bd	bHS	bec	bed	bed (SF)	bed (Codes)	CM (dB)	MPR (dB)	Test result
1	8/15	15/15	64	8/15	16/15	16/15	448/75	4	1	1	0	21.25
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3	2	19.13
3	15/15	5/15	64	5/15	30/15	30/15	bed1: 47/15 bed2: 47/15	4 4	2	2	1	20.14
4	1/15	15/15	64	1/15	2/15	2/15	56/75	4	1	3	2	19.03
5	12/15	15/15	64	12/15	24/15	24/15	224/25	4	1	1	0	21.13

For the following test, the TM4 was used for HSDPA; the TM5 was used for HSUPA.

Table 15 Pre-test Measurement Results

TEST CONDITIONS	RF Output Power (ERP)					
	Channel128(B) 824.2MHz		Channel192(M) 837.0MHz		Channel251(T) 848.8MHz	
	dBm		dBm		dBm	
	Measured	Limit	Measured	Limit	Measured	Limit



TM1	T _{nom} (25 °C) V _{nom} (5.0V)	32.08	38.5	32.02	38.5	31.85	38.5
TM2	T _{nom} (25 °C) V _{nom} (5.0V)	26.62	38.5	26.54	38.5	26.39	38.5
TEST CONDITIONS		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM3	T _{nom} (25 °C) V _{nom} (5.0V)	22.29	38.5	22.02	38.5	21.97	38.5
TM4	T _{nom} (25 °C) V _{nom} (5.0V)	22.18	38.5	21.88	38.5	21.90	38.5
TM5	T _{nom} (25 °C) V _{nom} (5.0V)	22.08	38.5	21.90	38.5	22.03	38.5

6.1.1.4.2 Substitution Results

Table 16 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	824.2	32.08	Dipole Ant.	35.21	-2.75	0.6	31.86	38.5	Pass
TM1	837.0	32.02	Dipole Ant.	35.25	-2.87	0.6	31.78	38.5	Pass
TM1	848.8	31.85	Dipole Ant.	35.11	-2.85	0.6	31.66	38.5	Pass
TM2	824.2	26.62	Dipole Ant.	29.72	-2.75	0.6	26.37	38.5	Pass
TM2	837.0	26.54	Dipole Ant.	29.81	-2.87	0.6	26.34	38.5	Pass
TM2	848.8	26.39	Dipole Ant.	29.61	-2.85	0.6	26.16	38.5	Pass
TM3	826.4	22.20	Dipole Ant.	25.52	-2.75	0.6	22.17	38.5	Pass
TM3	836.4	21.94	Dipole Ant.	25.21	-2.87	0.6	21.74	38.5	Pass
TM3	846.6	21.90	Dipole Ant.	25.24	-2.85	0.6	21.79	38.5	Pass
TM4	826.4	22.29	Dipole Ant.	25.42	-2.75	0.6	22.07	38.5	Pass



TM4	836.4	22.02	Dipole Ant.	25.25	-2.87	0.6	21.78	38.5	Pass
TM4	846.6	21.97	Dipole Ant.	25.20	-2.85	0.6	21.75	38.5	Pass
TM5	826.4	22.18	Dipole Ant.	25.32	-2.75	0.6	21.97	38.5	Pass
TM5	836.4	21.88	Dipole Ant.	25.14	-2.87	0.6	21.67	38.5	Pass
TM5	846.6	21.90	Dipole Ant.	25.11	-2.85	0.6	21.66	38.5	Pass

Note: a, For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

b, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 200kHz for TM1 and TM2 and 5M for TM3, TM4 and TM5.

6.1.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.



6.1.2 Conducted Power of Transmitter

6.1.2.1 Test Conditions

Table 17 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at Channel Bottom, Middle, Top

6.1.2.2 Test Specifications and Limits

6.1.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

6.1.2.2.2 Supporting Standards

Table 18 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.2.2.3 Limits

Compliance with part 22.913, in no any case may the peak power of a mobile station transmitter exceed 7 W. The calculated longitude ERP by following formula:

$$ERP(\text{dBm}) = 10 * \log(ERP_{\text{in watts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{\text{cod}}(\text{dBm}) = ERP(\text{dBm}) - \text{Gain}(\text{dBd}).$$

and $\text{Gain}(\text{dBd}) = \text{Gain}(\text{dBi}) - 2.15\text{dB}$

Table 19 Limits

Maximum Output Power (Watts)	< 7 Watts(38.5dBm)
------------------------------	--------------------

Antenna Gain(dBi):	2.8
Antenna Gain(dBd):	0.65
Maximum Conducted Output Power (dBm)	< 37.85

6.1.2.3 Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the HUAWEI E1756 USB Stick to the wireless communication tester CMU200 via the antenna connector. The band class is set as US Cellular.

(b) Test the Conducted maximum output power by the CMU200.

Test setup

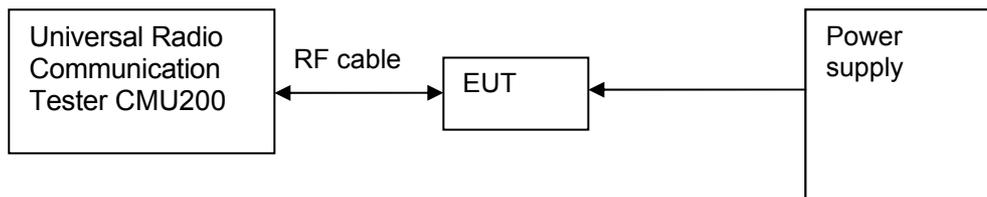


Figure 2. Test Set-up

6.1.2.4 Measurement Results

Table 20 Measurement Results

TEST CONDITIONS		RF Output Power (Conducted)					
		Channel128(B) 824.2MHz		Channel192(M) 837.0MHz		Channel251(T) 848.8MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T _{nom} (25 °C) V _{nom} (5.0V)	31.43	37.85	31.37	37.85	31.20	37.85
TM2	T _{nom} (25 °C) V _{nom} (5.0V)	25.97	37.85	25.89	37.85	25.74	37.85
TEST CONDITIONS		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit



TM3	T _{nom} (25 °C) V _{nom} (5.0V)	21.64	37.85	21.37	37.85	21.32	37.85
TM4	T _{nom} (25 °C) V _{nom} (5.0V)	21.53	37.85	21.23	37.85	21.25	37.85
TM5	T _{nom} (25 °C) V _{nom} (5.0V)	21.43	37.85	21.25	37.85	21.38	37.85

6.1.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.1.3 Modulation Characteristics

6.1.3.1 Test Conditions

Table 21 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3 at frequency Middle

6.1.3.2 Test Specifications and Limits

6.1.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

6.1.3.2.2 Supporting Standards

Table 22 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 22 subpart H.

Table 23 Limits

Limits	Not applicable
--------	----------------

6.1.4 Test Method and Setup

Connect the HUAWEI E1756 USB Stick to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as 850M; the HUAWEI E1756 USB Stick's output is matched with 50 Ω load, test method was according to 3GPP TS 51.010 and 3GPP TS 34.121. The waveform quality and constellation of the HUAWEI E1756 USB Stick was tested.

Test setup

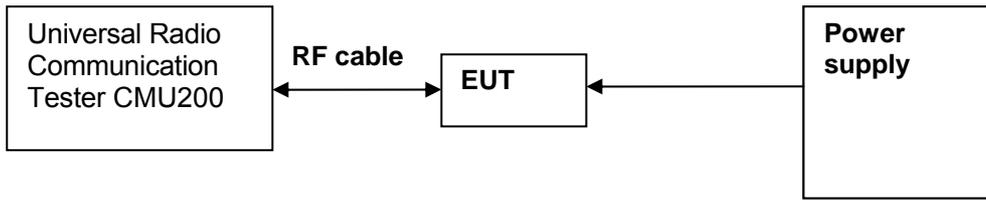


Figure 3. Test Set-up

6.1.4.1 Measurement Results

Table 24 Measurement Results

		Modulation Characteristic	
TEST CONDITIONS		Channel Middle	
		Measured	
		TM1	TM2
T _{nom} (25 °C)	V _{nom} (5.0V)	Refer to Appendix A1	Refer to Appendix A1
		Modulation Characteristic	
TEST CONDITIONS		Channel4182(M) 836.4MHz	
		Measured	
		TM3	
T _{nom} (25 °C)	V _{nom} (5.0V)	Refer to Appendix A1	

6.1.4.2 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A1.



6.1.5 Occupied Bandwidth

6.1.5.1 Test Conditions

Table 25 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom, Middle, Top

6.1.5.2 Test Specifications and Limits

6.1.5.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 22 subpart H.

6.1.5.2.2 Supporting Standards

Table 26 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.5.2.3 Limits

No specific occupied bandwidth requirement in part 22 subpart H, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 27 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.1.5.3 Test Method and Setup

HUAWEI E1756 USB Stick was connected to the wireless signal analyzer R&S FSU26 via the one RF connector. The band class is set as 850M; HUAWEI E1756 USB Stick was controlled to transmit maximum power. Measure and record the occupied bandwidth of the HUAWEI E1756 USB Stick by the R&S FSU26.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

Test Set-up

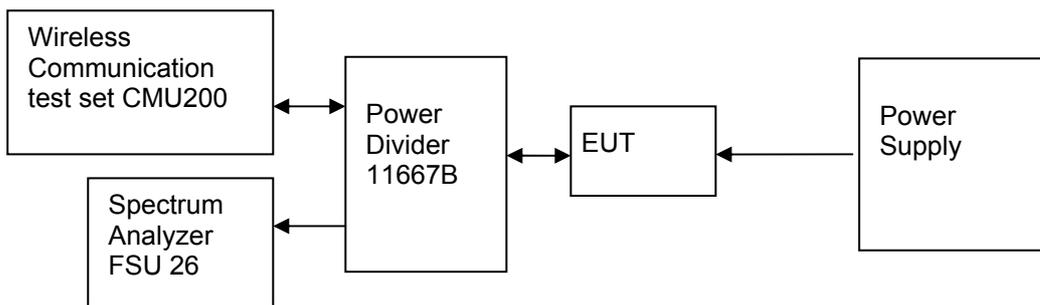


Figure 4. Test Set-up

6.1.5.4 Measurement Results

Table 28 Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel128(B) 824.2MHz		Channel192(M) 837.0MHz		Channel251(T) 848.8MHz	
		Measured (kHz)		Measured (kHz)		Measured (kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
Tnom (25 °C) Vnom (5.0V)	99%	243.59	245.19	241.99	243.59	243.59	245.19
Center Frequency		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	



		Measured (MHz)	Measured (MHz)	Measured (MHz)
		TM3	TM3	TM3
Tnom (25 °C) Vnom (5.0V)	99%	4.20	4.18	4.17

6.1.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix B1.

6.1.6 Band Edges Compliance

6.1.6.1 Test Conditions

Table 29 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom, Top

6.1.6.2 Test Specifications and Limits

6.1.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

6.1.6.2.2 Supporting Standards

Table 30 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.6.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$ (W) . (Whereas P is the rated power of the EUT).

Table 31 Limits

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$, 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$, 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.1.6.3 Test Method and Setup

HUAWEI E1756 USB Stick was connected to the wireless signal analyzer R&S FSU26 via the one RF connector, the band class is set as 850M. HUAWEI E1756 USB Stick was controlled to transmit maximum power. Measure and record band edges compliance of the HUAWEI E1756 USB Stick by the R&S FSU26.

For TM1/TM2 following RBW and VBW are employed:
 Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)
 Video bandwidth (VBW): 10 kHz
 For TM3 following RBW and VBW are employed:
 Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)
 Video bandwidth (VBW): 200 kHz

Test Set-up

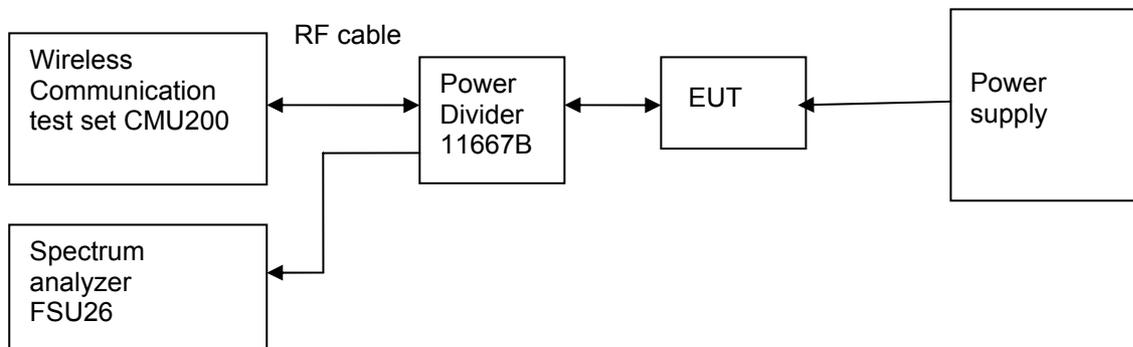


Figure 5. Test Set-up

6.1.6.4 Measurement Results

Table 32 Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
T_{nom} (25 °C), V_{nom} (5.0V)						
Cellular	824.2	128	TM1	<-13(See appendix C1)	- 13 dBm	Pass
	848.8	251	TM1	<-13(See appendix C1)	- 13 dBm	Pass
	824.2	128	TM2	<-13(See appendix C1)	- 13 dBm	Pass
	848.8	251	TM2	<-13(See appendix C1)	- 13 dBm	Pass
	826.4	4132	TM3	<-13(See appendix C1)	- 13 dBm	Pass
	846.6	4233	TM3	<-13(See appendix C1)	- 13 dBm	Pass



6.1.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix C1.

6.1.7 Spurious Emission at Antenna Terminal

6.1.7.1 Test Conditions

Table 33 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	50 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom, Middle, Top

6.1.7.2 Test Specifications and Limits

6.1.7.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

6.1.7.2.2 Supporting Standards

Table 34 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.7.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Table 35 Limits

	TM1	TM2	TM3
Rated Power:	33dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$, 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$, 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.1.7.3 Test Method and Setup

HUAWEI E1756 USB Stick was connected to the wireless signal analyzer R&S FSU26 via the one RF connector, the band class is set as 850M. HUAWEI E1756 USB Stick was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the HUAWEI E1756 USB Stick by the R&S FSU26.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 KHz: 1 kHz;
 Measurement bandwidth (RBW) for 150 kHz up to 30 MHz: 10 kHz;
 Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 100 kHz;
 Measurement bandwidth (RBW) for 1 GHz up to 12.75 GHz: 1 MHz;

Test Set-up

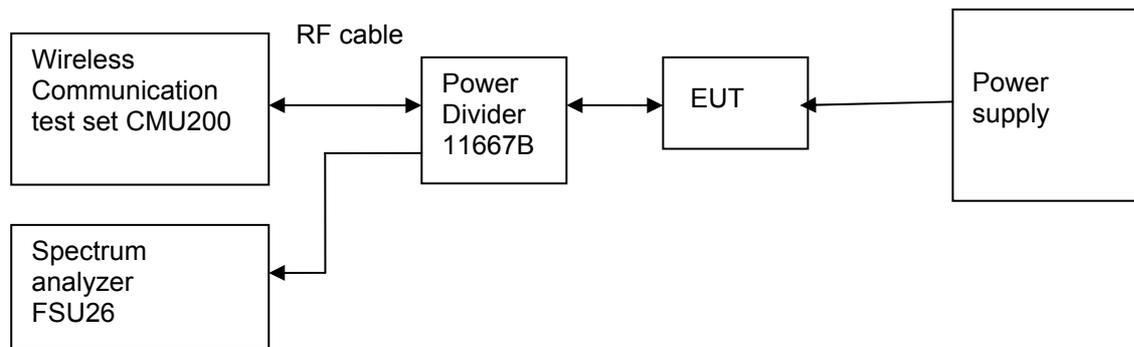


Figure 6. Test Set-up

6.1.7.4 Measurement Results

Table 36 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 128(B)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D1)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D1)	- 13 dBm	Pass
Channel 4132(B)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D1)	- 13 dBm	Pass
Channel 192(M)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D1)	- 13 dBm	Pass



	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D1)	- 13 dBm	Pass
Channel 4182(M)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D1)	- 13 dBm	Pass
Channel 251(T)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D1)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D1)	- 13 dBm	Pass
Channel 4233(T)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D1)	- 13 dBm	Pass

6.1.7.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D1.

6.1.8 Frequency Stability

6.1.8.1 Test Conditions

Table 37 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 % at 25 °C
Test Configurations:	TM1/TM2/TM3 at frequency Middle

6.1.8.2 Test Specifications and Limits

6.1.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 22.355

6.1.8.2.2 Supporting Standards

Table 38 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.1.8.2.3 Limits

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

6.1.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:
 (1) Vary primary supply voltage from 95 to 105 percent of the nominal value for other than hand carried battery equipment.
 (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.
 (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme voltage 4.75V and 5.25V, so here the EUT is tested in the 4.75V and 5.25V.

Test Set up

Connect the HUAWEI E1756 USB Modem to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

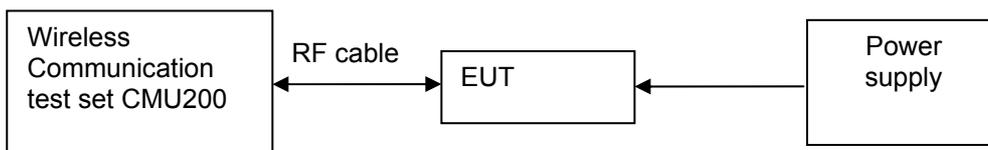


Figure 7. Test Set up

6.1.8.4 Measurement Results

6.1.8.4.1 Measurement Results vs. Variation of Temperature

- **TM1, 5.0V DC Channel No.192(837.0MHz)**

Table 39 Measurement Results vs. Variation of Temperature—TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	837.0	33	Pass
-20 °C	837.0	-23	Pass
-10 °C	837.0	-15	Pass
0 °C	837.0	-13	Pass
+10 °C	837.0	-10	Pass
+20 °C	837.0	10	Pass
+30 °C	837.0	-11	Pass



+40 °C	837.0	14	Pass
+50 °C	837.0	-18	Pass

● **TM2, 5.0V DC Channel No.192(837.0MHz)**

Table 40 Measurement Results vs. Variation of Temperature—TM2

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	837.0	-35	Pass
-20 °C	837.0	-25	Pass
-10 °C	837.0	17	Pass
0 °C	837.0	-11	Pass
+10 °C	837.0	-10	Pass
+20 °C	837.0	10	Pass
+30 °C	837.0	9	Pass
+40 °C	837.0	-10	Pass
+50 °C	837.0	-18	Pass

● **TM3, 5.0V DC Channel No.4182(836.4MHz)**

Table 41 Measurement Results vs. Variation of Temperature—TM3

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	836.4	-34	Pass
-20 °C	837.0	-26	Pass
-10 °C	837.0	18	Pass
0 °C	837.0	10	Pass
+10 °C	837.0	-8	Pass
+20 °C	837.0	-10	Pass
+30 °C	837.0	-10	Pass
+40 °C	837.0	14	Pass
+50 °C	837.0	-19	Pass

6.1.8.4.2 Measurement Results vs. Variation of Voltage

● **TM1, 25 °C ,Channel No. 192(837.0MHz)**

Table 42 Measurement Results vs. Variation of Voltage—TM1



Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
5.25 V	837.0	-9	Pass
5.0 V	837.0	-3	Pass
4.75 V	837.0	-5	Pass

● **TM2, 25 °C ,Channel No. 192(837.0MHz)**

Table 43 Measurement Results vs. Variation of Voltage—TM2

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
5.25 V	837.0	10	Pass
5.0 V	837.0	14	Pass
4.75 V	837.0	12	Pass

● **TM3, 25 °C ,Channel No. 4182(836.4MHz)**

Table 44 Measurement Results vs. Variation of Voltage—TM3

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
5.25 V	837.0	12	Pass
5.0 V	837.0	-6	Pass
4.75 V	837.0	0	Pass

6.1.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.2 Part 1900M Band

6.2.1 Effective Radiated Power of Transmitter (EIRP)

6.2.1.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at frequency Bottom, Middle, Top

6.2.1.2 Test Specifications and Limits

6.2.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 24.232

6.2.1.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.1.2.3 Limits

Compliance with part 24.232, mobile/portable stations are limited to 2 watts EIRP peak power.
 $W(\text{dBm}) = 10 * \log(W_{\text{in mW}})$.

Limits

Maximum Output Power (Watts)	< 2 Watts
Maximum Output Power (dBm)	< 33 dBm


6.2.1.3 Test Method and Setup

- (d) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in

- 2.1033(c)(8). Connect the HUAWEI E1756 USB Stick to the wireless communication tester CMU200 via the air interface. The band is set as PCS.
- (e) Test the Radiated maximum output power by the CMU200 received from test antenna.
 - (f) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: Pre-test

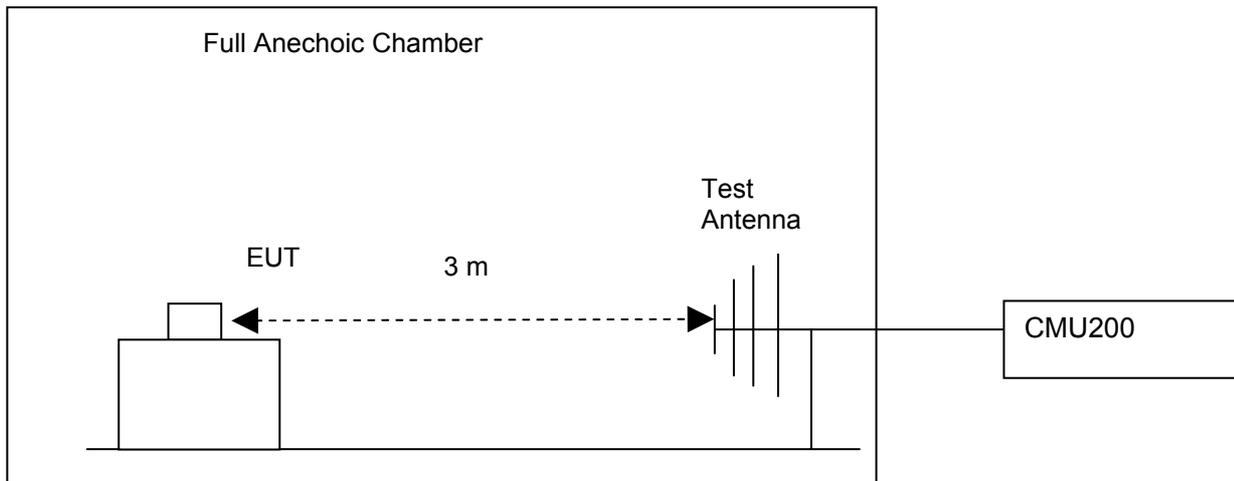

Step 2: Substitution method to verify the maximum EIRP

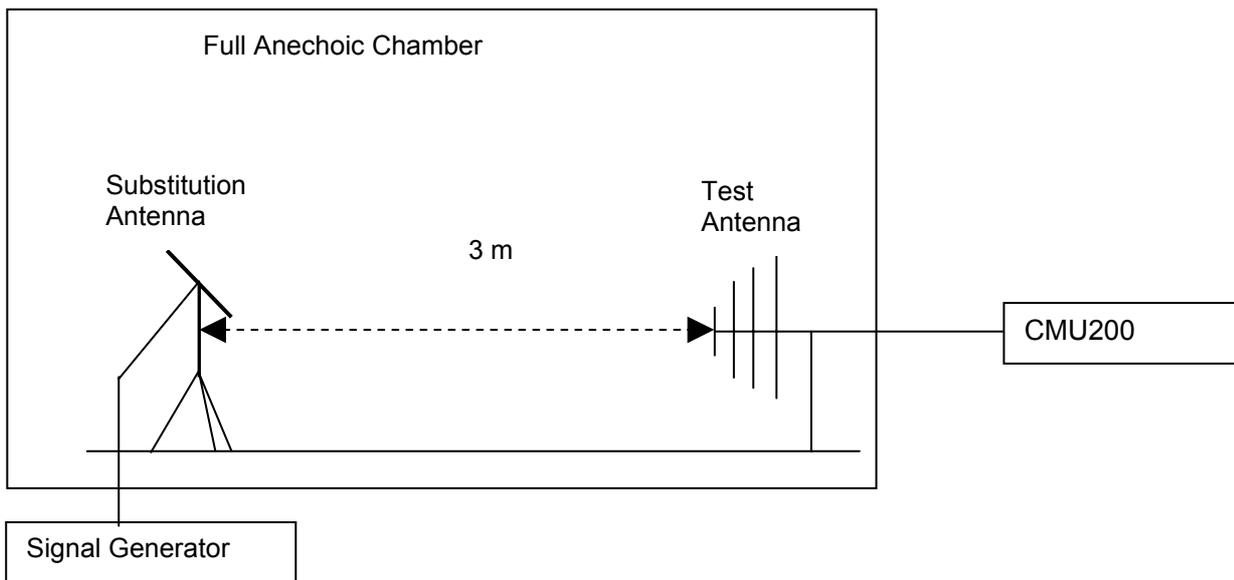


Figure 8. Test Set-up

NOTE: Effective Isotropic radiated power (EIRP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave horn antennas.

There is a constant difference of 2.15 dB between EIRP and ERP.

$EIRP (dBm) = ERP (dBm) + 2.15$ (ITU-R Recommendation SM.329-10).

EIRP was measured using 1 host.

BenQ Joy book S72

6.2.1.4 Measurement Results

6.2.1.4.1 Pre-test Results

For HSDPA test mode, there are 4 sub-tests for different configuration. For the sub-test 1, the max power of E1756 is the maximum as followed table.
The channel is mid range.

HSDPA conducted max power pre-scan

Sub-test	c	d	d (SF)	c/d	HS (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)	Test result
1	2/15	15/15	64	2/15	4/15	0	0	21.23
2	12/15	15/15	64	12/15	24/15	1	0	21.12
3	15/15	8/15	64	8/15	30/15	1.5	0.5	20.79
4	15/15	4/15	64	4/15	30/15	1.5	0.5	20.70

For HSUPA test mode, there are 5 sub-tests for different configuration. For the sub-test 1, the max power of E1756 is the maximum as followed table.
The channel is mid range.

HSUPA conducted max power pre-scan

Sub-test	bc	bd	bd (SF)	bc/bd	bHS	bec	bed	bed (SF)	bed (Codes)	CM (dB)	MPR (dB)	Test result
1	8/15	15/15	64	8/15	16/15	16/15	448/75	4	1	1	0	21.23
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3	2	19.31
3	15/15	5/15	64	5/15	30/15	30/15	bed1: 47/15 bed2: 47/15	4 4	2	2	1	20.08
4	1/15	15/15	64	1/15	2/15	2/15	56/75	4	1	3	2	19.13
5	12/15	15/15	64	12/15	24/15	24/15	224/25	4	1	1	0	21.18

For the following test, the TM4 was used for HSDPA; the TM5 was used for HSUPA.

Measurement Results

		RF Output Power (EIRP)					
TEST CONDITIONS		Channel512(B) 1850.2MHz		Channel661(M) 1880.0MHz		Channel810(T) 1909.8MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T _{nom} (25 °C) V _{nom} (5.0V)	31.65	33	31.56	33	31.49	33



TM2	T _{nom} (25 °C) V _{nom} (5.0V)	28.19	33	28.11	33	27.98	33
TEST CONDITIONS		Channel9262(B) 1852.4MHz		Channel9400(M) 1880.0MHz		Channel9538(T) 1907.6MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM3	T _{nom} (25 °C) V _{nom} (5.0V)	24.17	33	24.30	33	24.33	33
TM4	T _{nom} (25 °C) V _{nom} (5.0V)	24.13	33	24.23	33	24.20	33
TM5	T _{nom} (25 °C) V _{nom} (5.0V)	24.12	33	24.23	33	24.17	33

6.2.1.4.2 Substitution Results

Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBi]	Cable Loss [dB]	Substitution Level (EIRP) [dBm]	FCC limit [dBm]	Result
TM1	1850.2	31.65	Horn Ant.	27.97	4.5	1.0	31.47	33	Pass
TM1	1880.0	31.56	Horn Ant.	27.93	4.5	1.0	31.43	33	Pass
TM1	1909.8	31.49	Horn Ant.	27.54	4.8	1.0	31.34	33	Pass
TM2	1850.2	28.19	Horn Ant.	24.62	4.5	1.0	28.12	33	Pass
TM2	1880.0	28.11	Horn Ant.	24.53	4.5	1.0	28.03	33	Pass
TM2	1909.8	27.98	Horn Ant.	23.98	4.8	1.0	27.78	33	Pass
TM3	1852.4	24.17	Horn Ant.	20.48	4.5	1.0	23.98	33	Pass
TM3	1880.0	24.30	Horn Ant.	20.70	4.5	1.0	24.20	33	Pass
TM3	1907.6	24.33	Horn Ant.	20.43	4.8	1.0	24.23	33	Pass
TM4	1852.4	24.13	Horn Ant.	20.39	4.5	1.0	23.89	33	Pass
TM4	1880.0	24.23	Horn Ant.	20.49	4.5	1.0	23.99	33	Pass
TM4	1907.6	24.20	Horn Ant.	20.22	4.8	1.0	24.02	33	Pass
TM5	1852.4	24.12	Horn Ant.	20.37	4.5	1.0	23.87	33	Pass
TM5	1880.0	24.23	Horn Ant.	20.50	4.5	1.0	24.00	33	Pass
TM5	1907.6	24.17	Horn Ant.	20.28	4.8	1.0	24.08	33	Pass

Note: a, For get the EIRP (Efficient Isotropic Radiated Power) in substitution method, the following formula should take to calculate it,



$$\text{EIRP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBi]}$$

NOTE: SGP- Signal Generator Level

b, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 200kHz for TM1 and TM2 and 5M for TM3, TM4 and TM5.

6.2.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.



6.2.2 Conducted Power of Transmitter

6.2.2.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3/TM4/TM5 at frequency Bottom, Middle, Top

6.2.2.2 Test Specifications and Limits

6.2.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

6.2.2.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.2.2.3 Limits

Compliance with part 24.232, in no any case may the peak power of a mobile station transmitter exceed 2 W. The calculated longitude EIRP by following formula:

$$EIRP(dBm) = 10 * \log (EIRP_{in\ mW}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{cod.}(dBm) = EIRP(dBm) - Gain(dBi).$$

and Gain (dBi) = Gain(dBd) + 2.15dB

Limits

Maximum Output Power (Watts)	< 2 Watts (33 dBm)
------------------------------	--------------------

Antenna Gain(dBi):	3
Maximum Conducted Output Power (dBm)	< 30.00

6.2.2.3 Test Method and Setup

(a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the HUAWEI E1756 USB Stick to the wireless communication tester CMU200 via the antenna connector. The band class is set as PCS.
(b) Test the Conducted maximum output power by the CMU200.

Test setup

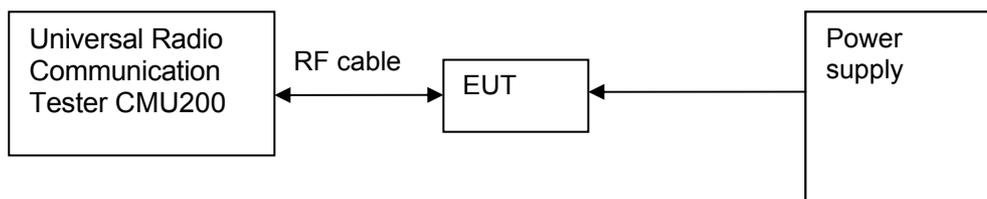


Figure 9. Test Set-up

6.2.2.4 Measurement Results

Measurement Results

TEST CONDITIONS		RF Output Power (Conducted)					
		Channel512(B) 1850.2MHz		Channel661(M) 1880.0MHz		Channel810(T) 1909.8MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T _{nom} (25 °C) V _{nom} (5.0V)	28.65	30.00	28.56	30.00	28.49	30.00
TM2	T _{nom} (25 °C) V _{nom} (5.0V)	25.19	30.00	25.11	30.00	24.98	30.00
TEST CONDITIONS		Channel9262(B) 1852.4MHz		Channel9400(M) 1880.0MHz		Channel9538(T) 1907.6MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM3	T _{nom} (25 °C)	21.17	30.00	21.30	30.00	21.33	30.00



	Vnom (5.0V)						
TM4	T _{nom} (25 °C)	21.13	30.00	21.23	30.00	21.20	30.00
	Vnom (5.0V)						
TM5	T _{nom} (25 °C)	21.12	30.00	21.23	30.00	21.17	30.00
	Vnom (5.0V)						

6.2.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

6.2.3 Modulation Characteristics

6.2.3.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3 at frequency Middle

6.2.3.2 Test Specifications and Limits

6.2.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 24 subpart E

6.2.3.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 24 subpart E.

Limits

Limits	Not applicable
--------	----------------

6.2.3.3 Test Method and Setup

Connect the HUAWEI E1756 USB Stick to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as PCS; the HUAWEI E1756 USB Stick's output is matched with 50 Ω load, test method was according to 3GPP TS 51.010 and 3GPP TS 34.121. The waveform quality and constellation of the HUAWEI E1756 USB Stick was tested.

Test setup

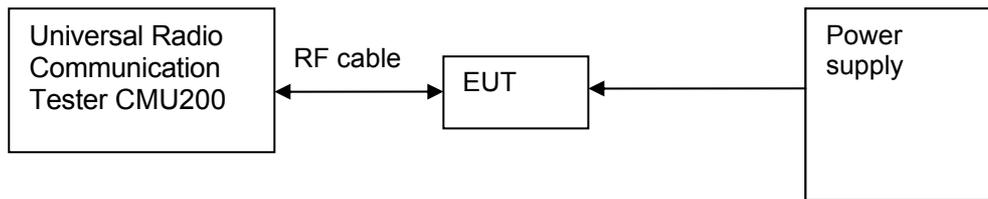


Figure 10. Test Set-up

6.2.3.4 Measurement Results

Measurement Results

		Modulation Characteristic	
TEST CONDITIONS		Channel661(M) 192MHz	
		Measured	
		TM1	TM2
T _{nom} (25 °C)	V _{nom} (5.0V)	Refer to Appendix A2	Refer to Appendix A2
TEST CONDITIONS		Channel9400(M) 192MHz	
		Measured	
		TM3	
T _{nom} (25 °C)	V _{nom} (5.0V)	Refer to Appendix A2	

6.2.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A2.



6.2.4 Occupied Bandwidth

6.2.4.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom, Middle, Top

6.2.4.2 Test Specifications and Limits

6.2.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 24 subpart E

6.2.4.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.4.2.3 Limits

No specific occupied bandwidth requirement in part 24 subpart E, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

6.2.4.3 Test Method and Setup

HUAWEI E1756 USB Stick was connected to the wireless signal analyzer R&S FSU26 via the one RF connector. The band class is set as PCS; HUAWEI E1756 USB Stick was controlled to transmit maximum power. Measure and record the occupied bandwidth of the HUAWEI E1756 USB Stick by the R&S FSU26.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency

limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer's maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)

Video bandwidth (VBW): 10 kHz

For TM3 following RBW and VBW are employed:

Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)

Video bandwidth (VBW): 500 kHz

Test Set-up

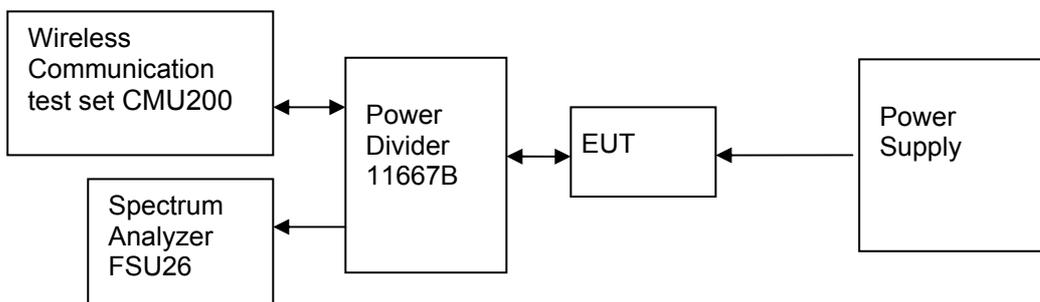


Figure 11. Test Set-up

6.2.4.4 Measurement Results

Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel512(B) 1850.2MHz		Channel661(M) 1880.0MHz		Channel810(T) 1909.8MHz	
		Measured (kHz)		Measured (kHz)		Measured (kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
Tnom (25 °C) Vnom (5.0V)	99%	245.19	243.59	243.59	241.99	246.79	245.19



Center Frequency		Channel9262(B) 1852.4MHz	Channel9400(M) 1880.0MHz	Channel9538(T) 1907.6MHz
		Measured (MHz)	Measured (MHz)	Measured (MHz)
		TM3	TM3	TM3
Tnom (25 °C) Vnom (5.0V)	99%	4.18	4.20	4.20

6.2.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix B2.

6.2.5 Band Edges Compliance

6.2.5.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom, Top

6.2.5.2 Test Specifications and Limits

6.2.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 24.238

6.2.5.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.5.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P(W)$. (Whereas P is the rated power of the EUT).

Limits for GPRS

	TM1	TM2	TM3
Rated Power:	30 dBm	26 dBm	24 dBm
Required attenuation:	$43 + 10 \log(1) = 43$, 30 dBm - 43 dB	$43 + 10 \log(0.4) = 39$, 26 dBm - 39 dB	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.2.5.3 Test Method and Setup

HUAWEI E1756 USB Stick was connected to the wireless signal analyzer R&S FSU26 via the one RF connector, the band class is set as PCS. HUAWEI E1756 USB Stick was controlled to transmit maximum power. Measure and record band edges compliance of the HUAWEI E1756 USB Stick by the R&S FSU26.

For TM1/TM2 following RBW and VBW are employed:
 Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)
 Video bandwidth (VBW): 10 kHz
 For TM3 following RBW and VBW are employed:
 Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)
 Video bandwidth (VBW): 200 kHz

Test Set-up

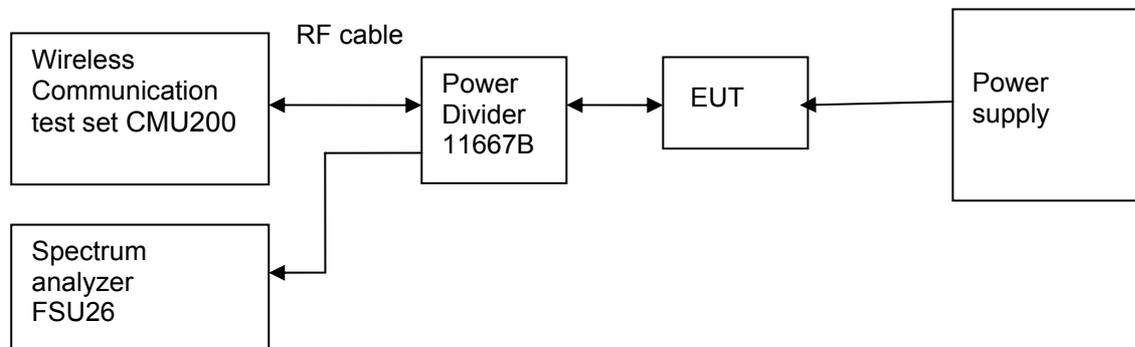


Figure 12. Test Set-up

6.2.5.4 Measurement Results

Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
$T_{nom} (25\text{ }^{\circ}\text{C}), V_{nom} (5.0\text{V})$						
PCS	128	512	TM1	<-13(See appendix C2)	- 13 dBm	Pass
	251	810	TM1	<-13(See appendix C2)	- 13 dBm	Pass
	128	512	TM2	<-13(See appendix C2)	- 13 dBm	Pass
	251	810	TM2	<-13(See appendix C2)	- 13 dBm	Pass
	1852.2	9262	TM3	<-13(See appendix C2)	- 13 dBm	Pass
	4233	9538	TM3	<-13(See appendix C2)	- 13 dBm	Pass



6.2.5.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix C2.

6.2.6 Spurious Emission at Antenna Terminal

6.2.6.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	50 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom, Middle ,Top

6.2.6.2 Test Specifications and Limits

6.2.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 24.238

6.2.6.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.6.2.3 Limits

Compliance with part 24.238, all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Limits for GPRS Mode

	TM1	TM2	TM3
Rated Power:	30 dBm	26 dBm	24 dBm
Required attenuation:	$43 + 10 \log(1) = 43$, 30 dBm - 43 dB	$43 + 10 \log(0.4) = 39$, 26 dBm - 39 dB	$43 + 10 \log(0.25) = 37$, 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

6.2.6.3 Test Method and Setup

The EUT was connected to the wireless signal analyzer R&S FSU26 via the one RF connector, the band class is set as PCS. The EUT was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the EUT by the R&S FSU26.

According to part 24.238, the defined measurement bandwidth as following:

24.238 (b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 150 kHz: 1 kHz;
Measurement bandwidth (RBW) for 150 kHz up to 30MHz: 10 kHz;
Measurement bandwidth (RBW) for 30 MHz up to 20GHz: 1MHz;

Test Set-up

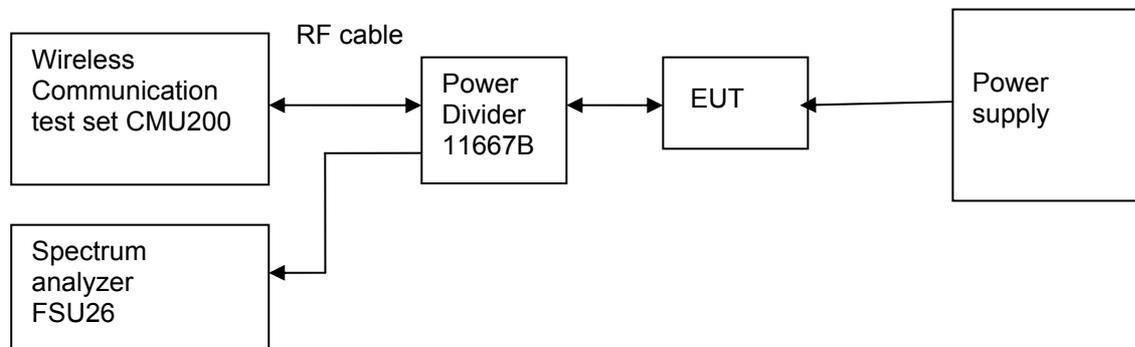


Figure 13. Test Set-up

6.2.6.4 Measurement Results

Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 512(B)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D2)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D2)	- 13 dBm	Pass
Channel 9262(B)	TM3	9 kHz~20GHz	24	<- 13 dBm (See appendix D2)	- 13 dBm	Pass
Channel 661(M)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D2)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D2)	- 13 dBm	Pass
Channel	TM3	9 kHz~20GHz	24	<- 13 dBm	- 13	Pass



9400(M)				(See appendix D2)	dBm	
Channel 810(T)	TM1	9 kHz~20GHz	30	<- 13 dBm (See appendix D2)	- 13 dBm	Pass
	TM2	9 kHz~20GHz	26	<- 13 dBm (See appendix D2)	- 13 dBm	Pass
Channel 9538(T)	TM3	9 kHz~20GHz	24	<- 13 dBm (See appendix D2)	- 13 dBm	Pass

6.2.6.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix D2.

6.2.7 Frequency Stability

6.2.7.1 Test Conditions

Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 % at 25 °C
Test Configurations:	TM1/TM2/TM3 at frequency Middle

6.2.7.2 Test Specifications and Limits

6.2.7.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 24.235

6.2.7.2.2 Supporting Standards

Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;
3GPP TS 34.121 V7.5.0:2007	Technical Specification Group Radio Access Network; User Equipment (UE) conformance specification; Radio transmission and reception (FDD);

6.2.7.2.3 Limits

No specific frequency stability requirement in part 2.1055 and part 24.235.

6.2.7.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 ° to +50 ° centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(a) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(b) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 95 to 105 percent of the nominal value for other than hand carried

battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.

(3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(c) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

The EUT can only work in such extreme voltage 4.75V and 5.25V, so here the EUT is tested in the 4.75V and 5.25V.

Test Set up

Connect the EUT to the Wireless Communication test set CMU200 via the connector. Then measure the frequency error by the Wireless Communication test set CMU200. The EUT's output is matched with a 50 Ω load.

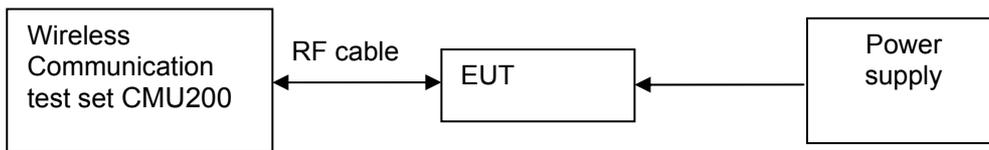


Figure 14. Test Set up

6.2.7.4 Measurement Results

6.2.7.4.1 Measurement Results vs. Variation of Temperature

- **TM1, 5.0V DC Channel No.661(192.0MHz)**

Measurement Results vs. Variation of Temperature – TM1

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	-35	Pass
-20 °C	1880.0	-17	Pass
-10 °C	1880.0	-13	Pass
0 °C	1880.0	12	Pass
+10 °C	1880.0	7	Pass
+20 °C	1880.0	-3	Pass
+30 °C	1880.0	8	Pass
+40 °C	1880.0	-7	Pass



+50 °C	1880.0	-17	Pass
--------	--------	-----	------

● **TM2, 5.0V DC Channel No.661(192.0MHz)**

Measurement Results vs. Variation of Temperature – TM2

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	-34	Pass
-20 °C	1880.0	-18	Pass
-10 °C	1880.0	19	Pass
0 °C	1880.0	9	Pass
+10 °C	1880.0	-10	Pass
+20 °C	1880.0	0	Pass
+30 °C	1880.0	2	Pass
+40 °C	1880.0	12	Pass
+50 °C	1880.0	10	Pass

● **TM3, 5.0V DC Channel No.9400(192.0MHz)**

Measurement Results vs. Variation of Temperature – TM3

Temperature	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	1880.0	29	Pass
-20 °C	1880.0	-26	Pass
-10 °C	1880.0	13	Pass
0 °C	1880.0	6	Pass
+10 °C	1880.0	8	Pass
+20 °C	1880.0	-4	Pass
+30 °C	1880.0	-4	Pass
+40 °C	1880.0	6	Pass
+50 °C	1880.0	15	Pass

6.2.7.4.2 Measurement Results vs. Variation of Voltage

● **TM1, 25 °C ,Channel No. 661(192.0MHz)**

Measurement Results vs. Variation of Voltage – TM1

Voltage	Nominal Frequency	Measured Frequency Error(Hz)	Result
---------	-------------------	------------------------------	--------



	(MHz)		
5.25 V	1880.0	-47	Pass
5.0 V	1880.0	-6	Pass
4.75 V	1880.0	-24	Pass

● **TM2, 25 °C ,Channel No. 661(192.0MHz)**

Measurement Results vs. Variation of Voltage – TM2

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
5.25 V	1880.0	-12	Pass
5.0 V	1880.0	-5	Pass
4.75 V	1880.0	-11	Pass

● **TM3, 25 °C ,Channel No. 9400(192.0MHz)**

Measurement Results vs. Variation of Voltage – TM3

Voltage	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
5.25 V	1880.0	40	Pass
5.0 V	1880.0	29	Pass
4.75 V	1880.0	-16	Pass

6.2.7.5 Conclusion

The equipment **PASSED** the requirement of this clause.

7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 45 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2



8 Appendices

Appendix A1	Measurement Results Modulation Characteristics	4 Pages
Appendix B1	Measurement Results Occupied Bandwidth	10 Pages
Appendix C1	Measurement Results Band Edges	7 Pages
Appendix D1	Measurement Results Spurious Emission at Antenna Terminal	37 Pages
Appendix A2	Measurement Results Modulation Characteristics	4 Pages
Appendix B2	Measurement Results Occupied Bandwidth	10 Pages
Appendix C2	Measurement Results Band Edges	7 Pages
Appendix D2	Measurement Results Spurious Emission at Antenna Terminal	28 Pages