


## Appendix F

# Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109

# 1、GPRS850

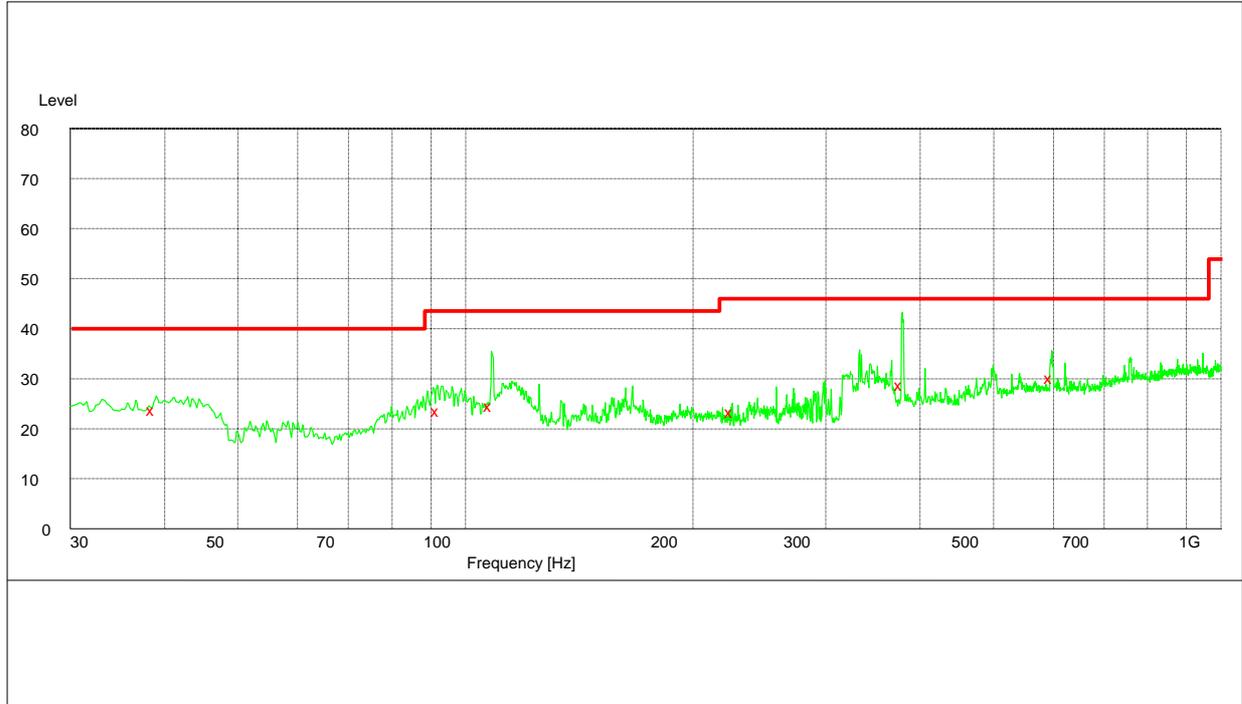

MEASUREMENT RESULT: QP DECTER


Frequency ( MHz )	Level ( dBμV/m )	Transd ( dB )	Limit ( dBμV/m )	Margin ( dB )	Height ( cm )	Azimuth ( deg )	Polarisation
38.700000	23.90	-8.9	40.0	16.1	100.0	281.00	VERTICAL
92.040000	23.60	-12.4	43.5	19.9	234.0	0.00	HORIZONTAL
108.180000	24.60	-10.0	43.5	18.9	287.0	257.00	HORIZONTAL
225.120000	23.40	-10.8	46.0	22.6	133.0	272.00	HORIZONTAL
378.180000	28.90	-5.1	46.0	17.1	154.0	0.00	VERTICAL
596.760000	30.30	-1.9	46.0	15.7	100.0	134.00	VERTICAL



## Appendix G

# Conducted Emission at Power Port

According to FCC Part 15.107

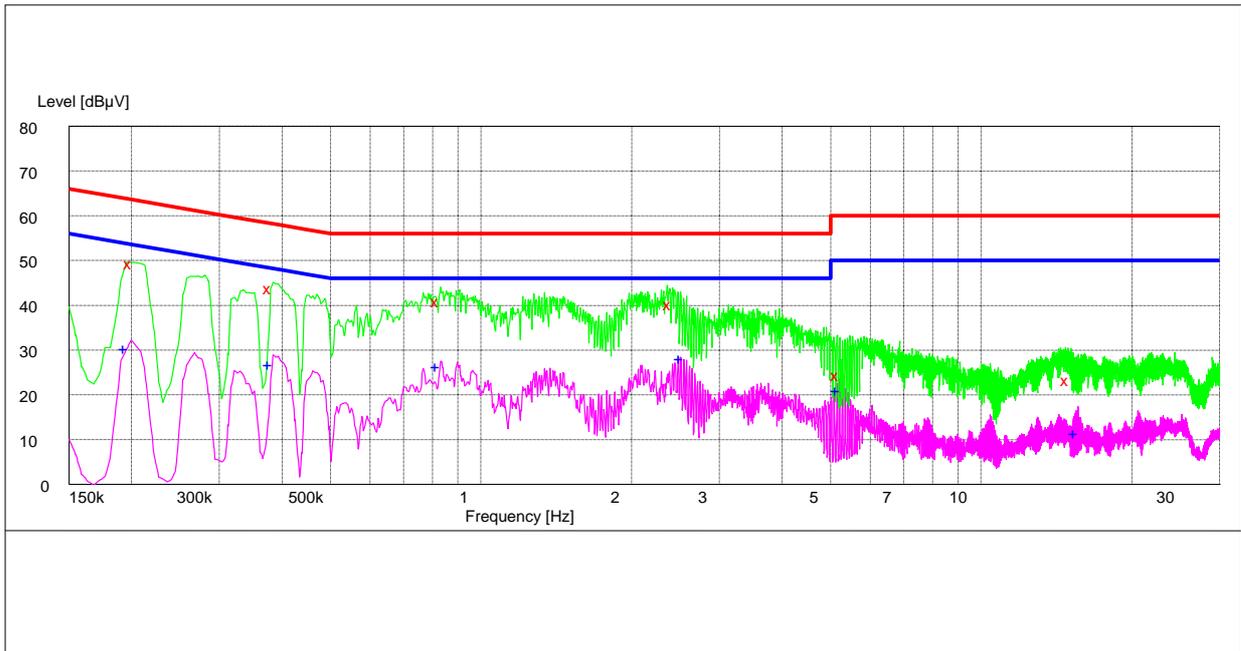

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.1995	49.6	10.5	64	14	N	FLO
0.3795	44.1	10.1	58	14.2	L3	FLO
0.8205	41.3	9.9	56	14.7	L3	FLO
2.3955	40.5	10.1	56	15.5	L3	FLO
5.172	24.7	10.1	60	35.3	N	FLO
14.9235	23.7	11.2	60	36.3	L3	FLO

MEASUREMENT RESULT: "AV DECTER"

Frequency (MHz)	Level (dBµV)	Transd (dB)	Limit (dBµV)	Margin (dB)	Line	PE
0.195	30.8	10.5	54	23	L3	FLO
0.8205	26.8	9.9	46	19.2	L3	FLO
0.3795	27.1	9.9	46	18.9	L3	FLO
2.5215	28.4	10.1	46	17.6	L3	FLO
5.172	21.3	10.1	50	28.7	L3	FLO
15.5175	11.8	11.4	50	38.2	L3	FLO