



Report No: SYBH(R) 54022007  
FCC ID: QISE270

**FCC TEST REPORT OF  
HUAWEI E270 HSDPA USB  
MODEM**

**M/N: E270**

**Apr. 18, 2007**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**All Right Reserved**

# Notice

1.	The laboratory has obtained the accreditation of China National Accreditation Committee for Laboratories (CNAL), and accreditation number: L0310.
2.	The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3.	The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4.	The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is C2583, R2364, and T256.
5.	The test report is invalid if not marked with "exclusive stamp for the test report".
6.	Any copy of the test report is invalid if not re-marked with the "exclusive stamp for the test report".
7.	The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8.	The test report is invalid if there is any evidence of erasure and/or falsification.
9.	If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10.	Normally, the test report is only responsible for the samples that have undergone the test.
11.	Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



---

---

**REPORT ON**

**FCC Test of HUAWEI E270 HSDPA USB MODEM**

**M/N: E270**

**Report No: SYBH(E) 54022007**

**REGULATION**

**FCC CFR47 Part 2: Subpart J;**

**FCC CFR47 Part 22: Subpart H;**

**CONCLUSION**

There are 8 items need to be tested, 8 items have been tested. The sample of the model completely meets the requirements.

**Final Judgement: Pass**



**General Manager**

2007.04.20

Guo Xiaoqi

Date

Name

signature

**Technical Responsibility  
For Area of Testing**

2007.04.19

Zhang Xinghai

Date

Name

signature

**Test Lab Engineer**

2007.04.18

Hu Jun

# Contents

<b>1</b>	<b><u>Summary</u></b> .....	<b>5</b>
<b>2</b>	<b><u>Product Description</u></b> .....	<b>6</b>
2.1	PRODUCTION INFORMATION .....	6
2.2	MODIFICATION INFORMATION .....	6
<b>3</b>	<b><u>Test Site Description</u></b> .....	<b>7</b>
3.1	TESTING PERIOD .....	7
3.2	GENERAL SET UP DESCRIPTION .....	7
<b>4</b>	<b><u>Product Description</u></b> .....	<b>8</b>
4.1	TECHNICAL CHARACTERISTICS.....	8
4.2	EUT IDENTIFICATION LIST.....	10
<b>5</b>	<b><u>Main Test Instruments</u></b> .....	<b>11</b>
<b>6</b>	<b><u>Transmitter Measurements</u></b> .....	<b>12</b>
6.1	EFFECTIVE RADIATED POWER OF TRANSMITTER (ERP).....	12
6.2	CONDUCTED POWER OF TRANSMITTER .....	16
6.3	MODULATION CHARACTERISTICS.....	18
6.4	OCCUPIED BANDWIDTH.....	20
6.5	BAND EDGES COMPLIANCE .....	23
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL.....	25
6.7	RADIATED SPURIOUS EMISSION .....	27
6.8	FREQUENCY STABILITY .....	31
<b>7</b>	<b><u>System Measurement Uncertainty</u></b> .....	<b>37</b>
<b>8</b>	<b><u>Appendixes</u></b> .....	<b>38</b>

## 1 Summary

The table below summarizes the measurements and results for the HUAWEI E270 HSDPA USB MODEM. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

<b>FCC Measurement Specification</b>	<b>FCC Limits Part(s)</b>	<b>Description</b>	<b>Result</b>
2.1046	22.913	Effective Radiated Power of Transmitter	PASS
2.1046	22.913	Conducted Power of Transmitter	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	22.917	Band Edges compliance	PASS
2.1051	22.917	Spurious Emission at Antenna Terminal	PASS
2.1053	22.917	Radiated Spurious Emission	PASS
2.1055	22.355	Frequency Stability	PASS

## 2 Product Description

### 2.1 Production Information

#### 2.1.1 General Description

HUAWEI E270 HSDPA USB MODEM is subscriber equipment in the GSM system. The frequency band is 850M. The E270 implements such functions as RF signal receiving / Transmitting, HSDPA/UMTS/EDGE/GPRS/GSM protocol processing and data service etc. Externally it provides USB interface (to connect to the notebook etc.), USIM card interface and antenna interface. It has two internal antennas as default. E270 uses Qualcomm MSM7200 chipset and Zero-IF technologies.

#### 2.1.2 Support function and Service

The HUAWEI E270 HSDPA USB MODEM support the function and service as follows:

Table 2 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: GMSK	TM1	GPRS/GSM
Data	Modulation: 8PSK	TM2	EDGE
Data	Modulation: QPSK	TM3	HSDPA/WCDMA

Note: \* The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V6.1.0 clause 40 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V6.1.0 clause 50.

### 2.2 Modification Information

For original equipment, following table is not application.

Table 3 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				

### 3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.  
P.O. Box 518129  
Huawei base, bantian,  
Longgang District, Shenzhen, China***

The test site description has been submitted to  and registration granted under the registration number **97456** on April 20, 2006. The test site has been accredited by  and the accredited number is **2174.01** in Jan of 2006.

#### 3.1 Testing Period

The test have been performed during the period of

**Apr. 01, 2007 –Apr. 18, 2007**

#### 3.2 General Set up Description

HUAWEI E270 HSDPA USB MODEM can support GPRS/EDGE mode and 850M Band. During this measurement, the HUAWEI E270 HSDPA USB MODEM just works in UMTS/GPRS/EDGE mode and 850M Band.

**TM1:** GPRS/GSM Mode with GMSK Modulation

**TM2:** EDGE Mode with 8PSK Modulation

**TM3:** UMTS/HSDPA Mode with QPSK Modulation

## 4 Product Description

### 4.1 Technical Characteristics

#### 4.1.1 Frequency Range

Table 4 Frequency Range

Uplink band:	824 to 849 MHz
Downlink band:	869 to 894 MHz

#### 4.1.2 Channel Spacing / Separation

Table 5 Channel Spacing / Separation

	EDGE/GPRS/GSM	UMTS/HSDPA
Channel spacing	200k Hz	200k Hz
Channel separation:	200k Hz	5M Hz

#### 4.1.3 Type of Emission

Table 6 Type of Emission

	EDGE/GPRS/GSM	UMTS/HSDPA
Emission Designation:	300kGXW	5M0F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

#### 4.1.4 Environmental Requirements

Table 7 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

#### 4.1.5 Power Source

Table 8 Power Source

DC voltage nominal:	 +5V; Supplied by USB port of notebook
DC voltage range	 +4.75-5.25V
DC current maximal:	600mA

#### 4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

#### 4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 9 Applied DC Voltages and Currents

Voltage:	 +2.85V
Current:	150mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)

## 4.2 EUT Identification List

### 4.2.1 Board Information

Table 10 Board Information

850MHz HUAWEI E270 HSDPA USB MODEM		
E270		
Board and Module		
Equipment Designation / Description	Serial Number	Remarks
-MAINBOARD	EF1AA10740700007	TCPU Ver.B

### 4.2.2 Adapter Technical Data

No Applicable.

### 4.2.3 Battery Technical Data

No Applicable.

### 4.2.4 FCC Identification

**Grantee Code:** QIS  
**Product Code:** E270  
**FCC Identification:** QISE270

## 5 Main Test Instruments

Table 11 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until (MM.DD.YYYY)
3m Semi Anechoic Chamber	S+M	N/A	N/A	12.24.2007
3m Full Anechoic Chamber	S+M	N/A	N/A	12.05.2007
Signal Analyzer	R&S	FSQ 26	100266	07.18.2007
Test Receiver Display Unit	R&S	ESMI 804.8932.52	829214/011	07.30.2007
Test Receiver RF Unit	R&S	ESMI 1032.5640.53	829550/008	07.30.2007
Receiver	R&S	ESIB 26	100318	08.17.2007
Receiver	R&S	ESCS30	830245/018	07.30.2007
Pre-Amplifier	Agilent	8447D	2944A10146	07.30.2007
Pre-Amplifier	Agilent	83017A	3950M00246	07.03.2007
Loop Antenna	Schwarzbeck	FMZB1516	1516115	08.08.2007
BiLog Antenna	Schaffner	CBL 6112B	2747	08.30.2007
BiLog Antenna	Schaffner	CBL 6112B	2536	08.30.2007
Horn Antenna	R&S	HF906 4044.4507.02	359287/005	12.05.2007
Horn Antenna	R&S	HF906 4044.4507.02	359287/006	12.05.2007
Horn Antenna	ETS-Lindgren	3117	00062533	09.14.2007
Horn Antenna	ETS-Lindgren	3117	00062549	09.14.2007
Horn Antenna	ETS-Lindgren	3116	00031541	07.15.2007
Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	08.28.2007
Signal Generator	R&S	SMT06	830264/009	09.29.2007
Signal Generator	R&S	SMR 40	100325	12.09.2007
Artificial Mains Network	Schwarzbeck	NNLK8121	8121416	09.29.2007
Power Supply	Keithley	2306	1045337	07.20.2007
Climate Chamber	WEISS	ACS-1	3604040034	08.24.2007
Universal Radio Communication Tester	R&S	CMU200	108035	07.04.2007
Wireless communication test set	Agilent	8960	GB43461081	09.24.2007

## 6 Transmitter Measurements

### 6.1 Effective Radiated Power of Transmitter (ERP)

#### 6.1.1 Test Conditions

Table 12 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3 at frequency Bottom、Middle、Top

#### 6.1.2 Test Specifications and Limits

##### 6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 22.913

##### 6.1.2.2 Supporting Standards

Table 13 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V6.1.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

##### 6.1.2.3 Limits

Compliance with part 22.913, mobile/portable stations are limited to 7 watts ERP peak power.  
 $W(\text{dBm}) = 10 * \log(W_{\text{watts}})$ .

Table 14 Limits

Maximum Output Power (Watts)	< 7 Watts
Maximum Output Power (dBm)	< 38.5 dBm


#### 6.1.3 Test Method and Setup

- For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the HUAWEI E270 HSDPA USB MODEM to the wireless communication tester CMU200 via the air interface. The band set as 850M.
- Test the Radiated maximum output power by the CMU200 received from test antenna.
- Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the

power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

**Test setup**

**Step 1: Pre-test**

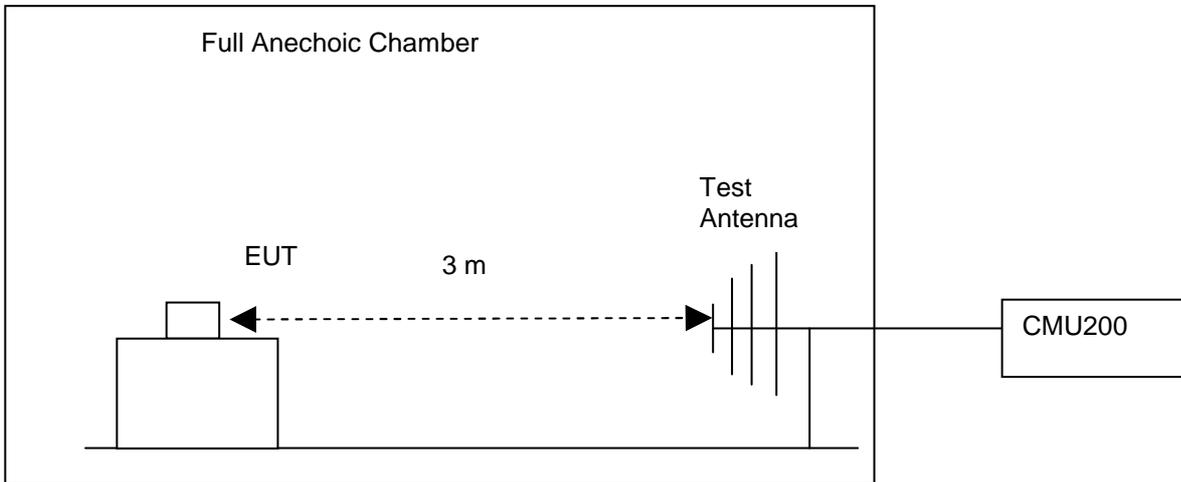

**Step 2: Substitution method to verify the maximum ERP**

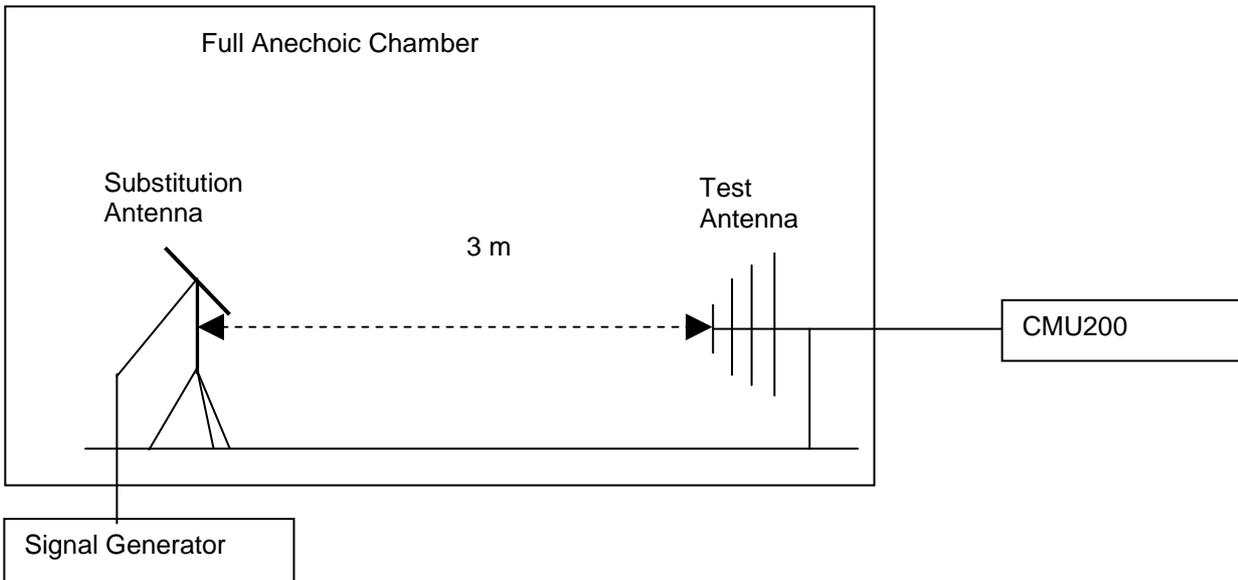


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

## 6.1.4 Measurement Results

### 6.1.4.1 Pre-test Results

Table 15 Measurement Results

TEST CONDITIONS		RF Output Power (ERP)					
		Channel128(B) 824.2MHz		Channel192 (M) 837MHz		Channel251(T) 848.8MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (5V)	<b>32.66</b>	<b>38.5</b>	<b>32.87</b>	<b>38.5</b>	<b>32.85</b>	<b>38.5</b>
TM2	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (5V)	<b>26.02</b>	<b>38.5</b>	<b>26.11</b>	<b>38.5</b>	<b>25.97</b>	<b>38.5</b>
TEST CONDITIONS		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM3	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (5V)	<b>22.93</b>	<b>38.5</b>	<b>23.01</b>	<b>38.5</b>	<b>22.97</b>	<b>38.5</b>

### 6.1.4.2 Substitution Results

Table 16 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	FCC limit [dBm]	Result
TM1	824.2	<b>32.62</b>	Dipole Ant.	-2.95	0.6	<b>32.25</b>	38.5	Pass
TM1	837	<b>32.75</b>	Dipole Ant.	-3.05	0.6	<b>32.40</b>	38.5	Pass
TM1	848.8	<b>32.84</b>	Dipole Ant.	-3.11	0.6	<b>32.54</b>	38.5	Pass
TM2	824.2	<b>25.97</b>	Dipole Ant.	-2.95	0.6	<b>25.63</b>	38.5	Pass
TM2	837	<b>25.99</b>	Dipole Ant.	-3.05	0.6	<b>25.80</b>	38.5	Pass
TM2	848.8	<b>25.95</b>	Dipole Ant.	-3.11	0.6	<b>25.84</b>	38.5	Pass
TM3	826.4	<b>22.99</b>	Dipole Ant.	-2.95	0.6	<b>22.62</b>	38.5	Pass
TM3	836.4	<b>22.98</b>	Dipole Ant.	-3.05	0.6	<b>22.73</b>	38.5	Pass
TM3	846.6	<b>22.92</b>	Dipole Ant.	-3.11	0.6	<b>22.76</b>	38.5	Pass

Note: a, For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

b, A WCDMA signal with bandwidth of 5MHz and a GSM signal with bandwidth of 200kHz are created by the vector generator R&S SMU200A.

c, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 200kHz for TM1 and TM2 and 5MHz for TM3.

### 6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

## 6.2 Conducted Power of Transmitter

### 6.2.1 Test Conditions

Table 17 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom、 Middle、 Top

### 6.2.2 Test Specifications and Limits

#### 6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

#### 6.2.2.2 Supporting Standards

Table 18 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V6.1.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.2.2.3 Limits

Compliance with part 22.913, in no any case may the peak power of a mobile station transmitter exceed 7 W. The calculated longitude ERP by following formula:

$$ERP(\text{dBm}) = 10 * \log (ERP_{\text{in watts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{\text{cod}}(\text{dBm}) = ERP(\text{dBm}) - \text{Gain}(\text{dBd}).$$

and  $\text{Gain}(\text{dBd}) = \text{Gain}(\text{dBi}) - 2.15\text{dB}$

Table 19 Limits

Maximum Output Power (Watts)	< 7 Watts
Antenna Gain(dBd):	-0.15
Maximum Conducted Output Power (dBm)	< 38.65dBm

### 6.2.3 Test Method and Setup

(a)For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in

accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the HUAWEI E270 HSDPA USB MODEM to the wireless communication tester CMU200 via the antenna connector. The band class is set as US Cellular.  
 (b)Test the Conducted maximum output power by the CMU200.

**Test setup**

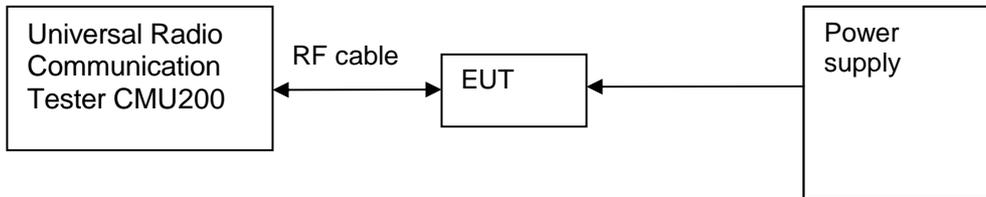


Figure 2. Test Set-up

**6.2.4 Measurement Results**

Table 20 Measurement Results

TEST CONDITIONS		RF Output Power (Conducted)					
		Channel128(B) 824.2MHz		Channel192 (M) 837MHz		Channel251(T) 848.8MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T <sub>nom</sub> (25 °C)	<b>32.85</b>	<b>38.65</b>	<b>33.02</b>	<b>38.65</b>	<b>32.96</b>	<b>38.65</b>
	V <sub>nom</sub> (5V)						
TM2	T <sub>nom</sub> (25 °C)	<b>26.15</b>	<b>38.65</b>	<b>26.26</b>	<b>38.65</b>	<b>26.15</b>	<b>38.65</b>
	V <sub>nom</sub> (5V)						
TEST CONDITIONS		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM3	T <sub>nom</sub> (25 °C)	<b>23.07</b>	<b>38.65</b>	<b>23.16</b>	<b>38.65</b>	<b>23.12</b>	<b>38.65</b>
	V <sub>nom</sub> (5V)						

**6.2.5 Conclusion**

The equipment **PASSED** the requirement of this clause.

### 6.3 Modulation Characteristics

#### 6.3.1 Test Conditions

Table 21 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3 at frequency Middle

#### 6.3.2 Test Specifications and Limits

##### 6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

##### 6.3.2.2 Supporting Standards

Table 22 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V6.1.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

##### 6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 22 subpart H.

Table 23 Limits

Limits	Not applicable
--------	----------------

#### 6.3.3 Test Method and Setup

Connect the HUAWEI E270 HSDPA USB MODEM to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as 850M; the HUAWEI E270 HSDPA USB MODEM's output is matched with 50 Ω load, test method was according to 3GPP TS 51.010. The waveform quality and constellation of the HUAWEI E270 HSDPA USB MODEM was tested.

##### Test setup

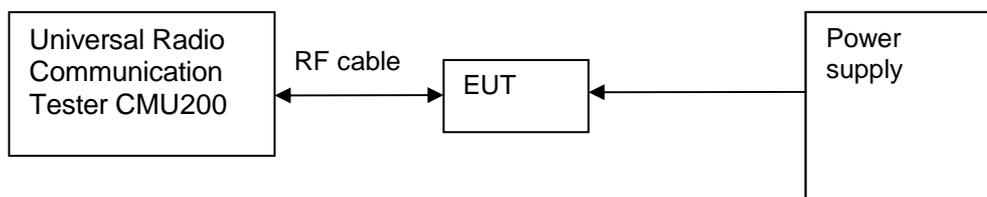


Figure 3. Test Set-up

### 6.3.4 Measurement Results

Table 24 Measurement Results

		Modulation Characteristic	
TEST CONDITIONS		Channel192(M) 837MHz	
		Measured	
		TM1	TM2
T <sub>nom</sub> (25 °C)	V <sub>nom</sub> (5V)	Refer to Appendix A	Refer to Appendix A
		Modulation Characteristic	
TEST CONDITIONS		Channel4182(M) 836.4MHz	
		Measured	
		TM3	
T <sub>nom</sub> (25 °C)	V <sub>nom</sub> (5V)	Refer to Appendix A	

### 6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A.

## 6.4 Occupied Bandwidth

### 6.4.1 Test Conditions

Table 25 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	GPRSMODE、EDGE MODE and UMTS MODE at frequency Bottom、Top

### 6.4.2 Test Specifications and Limits

#### 6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 22 subpart H.

#### 6.4.2.2 Supporting Standards

Table 26 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V6.1.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.4.2.3 Limits

No specific occupied bandwidth requirement in part 22 subpart H, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 27 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

### 6.4.3 Test Method and Setup

HUAWEI E270 HSDPA USB MODEM was connected to the wireless signal analyzer R&S FSU26 via the one RF connector. The band class is set as 850M; HUAWEI E270 HSDPA USB MODEM was controlled to transmit maximum power. Measure and record the occupied bandwidth of the HUAWEI E270 HSDPA USB MODEM by the R&S FSU26.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the

services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer’s maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

**Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)**

**Video bandwidth (VBW): 10 kHz**

For TM3 system following RBW and VBW are employed:

**Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)**

**Video bandwidth (VBW): 500 kHz**

**Test Set-up**

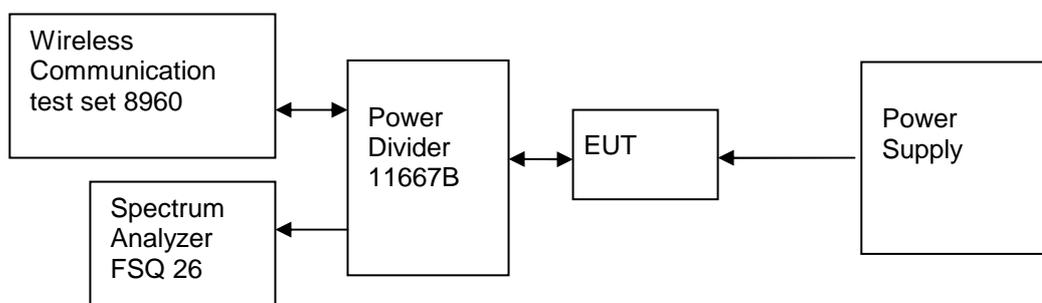


Figure 4. Test Set-up

**6.4.4 Measurement Results**

Table 28 Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel128 (B) 824.2MHz		Channel192 (M) 837MHz		Channel251 (T) 848.8MHz	
		Measured (kHz)		Measured (kHz)		Measured (kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
T <sub>nom</sub> (25 °C)	99%	245.19	238.78	246.79	237.18	248.40	241.99
V <sub>nom</sub> (5V)							
TEST CONDITIONS		Occupied Bandwidth					
		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233 (T) 846.6MHz	
		Measured		Measured		Measured	

		(MHz)	(MHz)	(KHz)
		TM3	TM3	TM3
T <sub>nom</sub> (25 °C) V <sub>nom</sub> (5V)	99%	4.183	4.199	4.183

### 6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.  
For the measurement results refer to appendix B.

## 6.5 Band Edges Compliance

### 6.5.1 Test Conditions

Table 29 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom、 Top

### 6.5.2 Test Specifications and Limits

#### 6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

#### 6.5.2.2 Supporting Standards

Table 30 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V6.1.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.5.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT).

Table 31 Limits

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$ , 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$ , 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$ ; 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

### 6.5.3 Test Method and Setup

HUAWEI E270 HSDPA USB MODEM was connected to the wireless signal analyzer R&S FSU26 via the one RF connector, the band class is set as 850M. HUAWEI E270 HSDPA USB MODEM was controlled to transmit maximum power. Measure and record band edges compliance of the HUAWEI E270 HSDPA USB MODEM by the R&S FSU26.

In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC part22.917.The FCC rules define the fundamental emission as -26dBc bandwidth. The limit is -13dBm.

**Test Set-up**

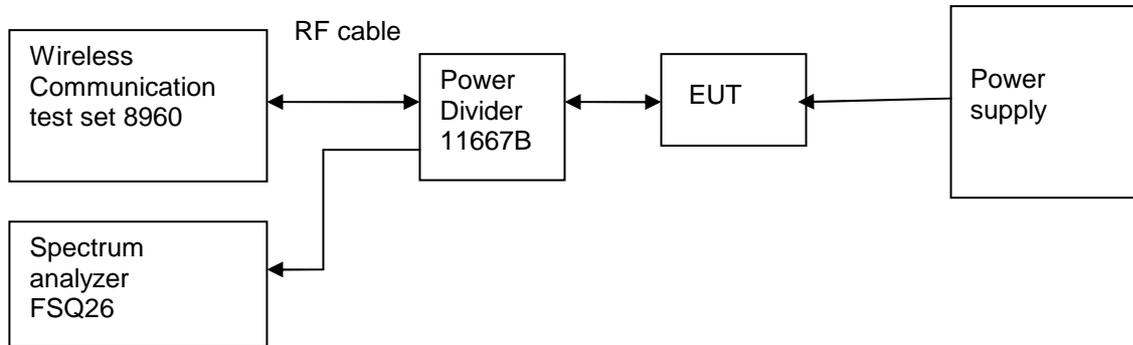


Figure 5. Test Set-up

**6.5.4 Measurement Results**

Table 32 Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
$T_{nom} (25\text{ }^{\circ}\text{C}), V_{nom} (5\text{V})$						
Celluar	824.2	128	TM1	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM1	<-13(See appendix C)	- 13 dBm	Pass
	824.2	128	TM2	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM2	<-13(See appendix C)	- 13 dBm	Pass
	826.4	4132	TM3	<-13(See appendix C)	- 13 dBm	Pass
	846.6	4233	TM3	<-13(See appendix C)	- 13 dBm	Pass

**6.5.5 Conclusion**

The equipment **PASSED** the requirement of this clause. For the measurement results refer to appendix C.

## 6.6 Spurious Emission at Antenna Terminal

### 6.6.1 Test Conditions

Table 33 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	50 %
Test Configurations:	TM1/TM2/TM3 at frequency B、M、T

### 6.6.2 Test Specifications and Limits

#### 6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

#### 6.6.2.2 Supporting Standards

Table 34 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V6.1.0:2005	Recommended GSM/EDGE MS conformance specification

#### 6.6.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT).

Table 35 Limits

	TM1	TM2	TM3
Rated Power:	33dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$ , 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$ , 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$ ; 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

### 6.6.3 Test Method and Setup

HUAWEI E270 HSDPA USB MODEM was connected to the wireless signal analyzer R&S FSU26 via the one RF connector, the band class is set as 850M. HUAWEI E270 HSDPA USB MODEM was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the HUAWEI E270 HSDPA USB MODEM by the R&S FSU26.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these provisions is based on the use of

measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 1 GHz: 100 kHz;  
 Measurement bandwidth (RBW) for 1 GHz up to 12.75 GHz: 1 MHz;

**Test Set-up**

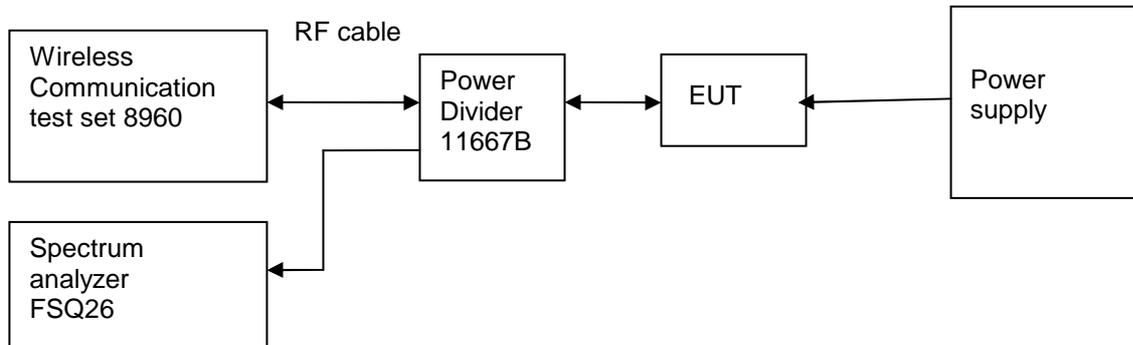


Figure 6. Test Set-up

**6.6.4 Measurement Results**

Table 36 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 128(B)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4132(B)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 251(T)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4233(T)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

**6.6.5 Conclusion**

The equipment **PASSED** the requirement of this clause.  
 For the measurement results refer to appendix D.

## 6.7 Radiated Spurious Emission

### 6.7.1 Test Conditions

Table 37 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25 °C
Relative humidity:	53 %
Test Configurations:	TM1/TM2/TM3 at frequency M

### 6.7.2 Test Specifications and Limits

#### 6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 22.917

#### 6.7.2.2 Supporting Standards

Table 38 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V6.1.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.7.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT).

Table 39 Limits for GPRS Mode

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$ , 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$ , 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$ , 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

### 6.7.3 Test Method and Setup

(a) Measurements were made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.1049(c) as appropriate. For equipment operating on frequencies below 890 MHz, an Open Field Test is normally required with the measuring instrument antenna located in the far field at all test frequencies. In the event it is either

impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections, which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

- (b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:
- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
  - (2) All equipment operating on frequencies higher than 25 MHz
  - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
  - (4) Other types of equipment as required, when deemed necessary by the Commission.

HUAWEI E270 HSDPA USB MODEM is equipment with non-integral antenna. And it should test according to part (b) of above section.

BTS simulator is connected to a communication antenna, by which communicate with the HUAWEI E270 HSDPA USB MODEM inside the test site. The BTS simulator controls the HUAWEI E270 HSDPA USB MODEM to transmit at maximum power which defined in specification of product when in traffic mode, field strength of spurious emission in idle mode were also tested. The HUAWEI E270 HSDPA USB MODEM operates on a typical channel.

### **The test procedure:**

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP. shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the HUAWEI E270 HSDPA USB MODEM to the BTS simulator via the air interface. The band class is set as 850M.
- (b) Test the Radiated maximum output power by the Rohde and Schwarz ESMI Test Receiver from test antenna.
- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on ESMI Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.


According to part 22.917, the defined measurement bandwidth as following:

22.917(b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 12.75 GHz: 100 kHz;

### **Test setup**

#### **Step 1: Pre-test**

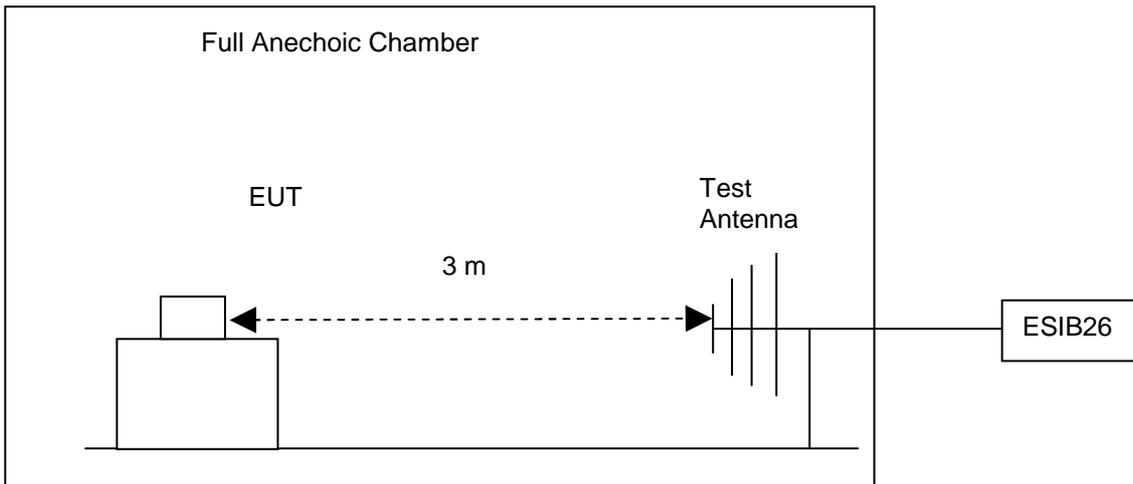

**Step 2: Substitution method to verify the maximum ERP**

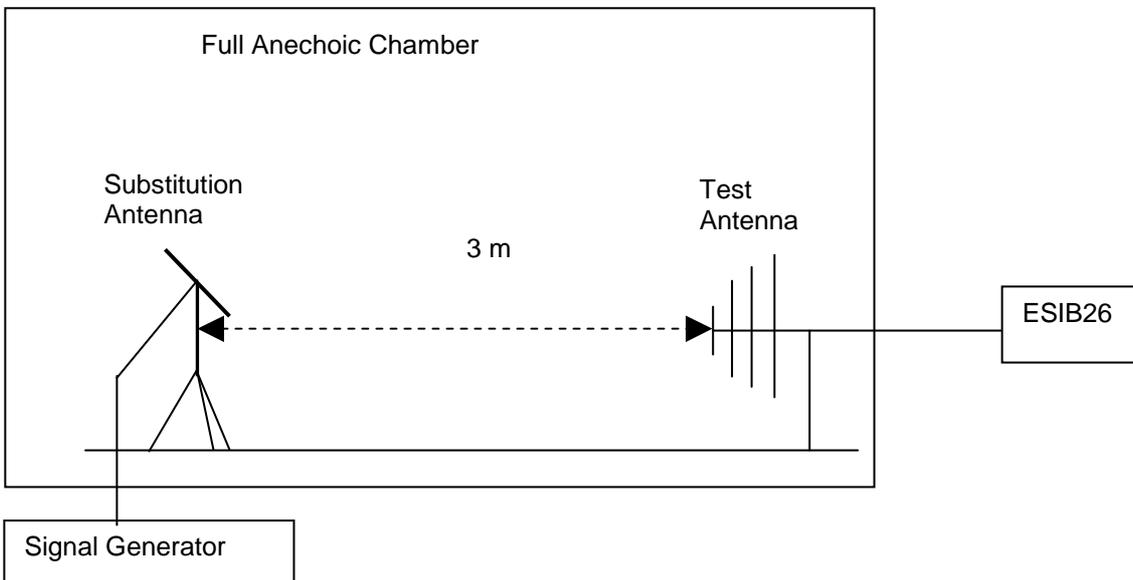


Figure 7. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

**6.7.4 Measurement Results**

**6.7.4.1 Pre-test Measurement Results**

Table 40 Measurement Results

Channel Number	Mode	Test Range (Frequency)	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
192	TM1	9 kHz ~20GHz	30	<- 13 dBm (See appendix E)	- 13 dBm	Pass
192	TM2	9 kHz ~20GHz	26	<- 13 dBm (See appendix E)	- 13 dBm	Pass
4182	TM3	9 kHz	24	<- 13 dBm	- 13 dBm	Pass

		~20GHz		(See appendix E)		
--	--	--------	--	------------------	--	--

**6.7.4.2 Substitution Results**

No obvious peak found in pre- test.

Calculation Sample:

Table 41 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the EIRP. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,  
 The upper table is just a sample, because the test result’s margin is very big, so we didn’t use substitution method

$$ERP [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$

NOTE: SGP- Signal Generator Level

**6.7.5 Conclusion**

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix E.

According to pre-test result, only the test data which the data card with the external antenna (the maximum radiated spurious emission condition) were given in appendix E. The setup photos were shown in EMC report’s appendix.

## 6.8 Frequency Stability

### 6.8.1 Test Conditions

Table 42 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 % at 25 °C
Test Configurations:	TM1/TM2/TM3 at frequency M

### 6.8.2 Test Specifications and Limits

#### 6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 22.355

#### 6.8.2.2 Supporting Standards

Table 43 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V6.1.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.8.2.3 Limits

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

### 6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 °to +50 °centigrade for all equipmen t except that specified in subparagraphs (2) and (3) of paragraph 2.1055

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal

supply voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

**Test Set up**

Connect the HUAWEI E270 HSDPA USB MODEM to the Wireless Communication test set 8960 via the connector. Then measure the frequency error by the Wireless Communication test set 8960. The HUAWEI E270 HSDPA USB MODEM’s output is matched with a 50 Ω load.

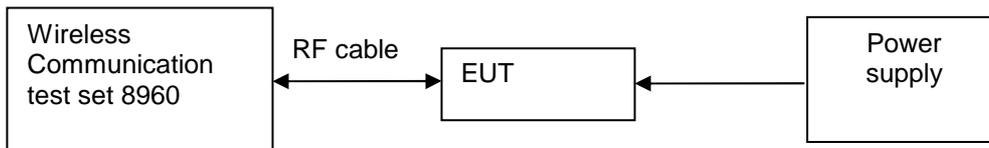


Figure 8. Test Set up

**6.8.4 Measurement Results**

**6.8.4.1 Measurement Results vs. Variation of Temperature**

- **TM1, 5V DC Channel No.192(837.0MHz)**

Table 44 Measurement Results vs. Variation of Temperature—GPRS Mode

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 ℃	33	837.0	-22.03	Pass
-20 ℃	33	837.0	-18.65	Pass
-10 ℃	33	837.0	14.28	Pass
0 ℃	33	837.0	18.65	Pass
+10 ℃	33	837.0	25.33	Pass
+20 ℃	33	837.0	27.86	Pass
+30 ℃	33	837.0	23.54	Pass
+40 ℃	33	837.0	22.35	Pass
+50 ℃	33	837.0	13.45	Pass

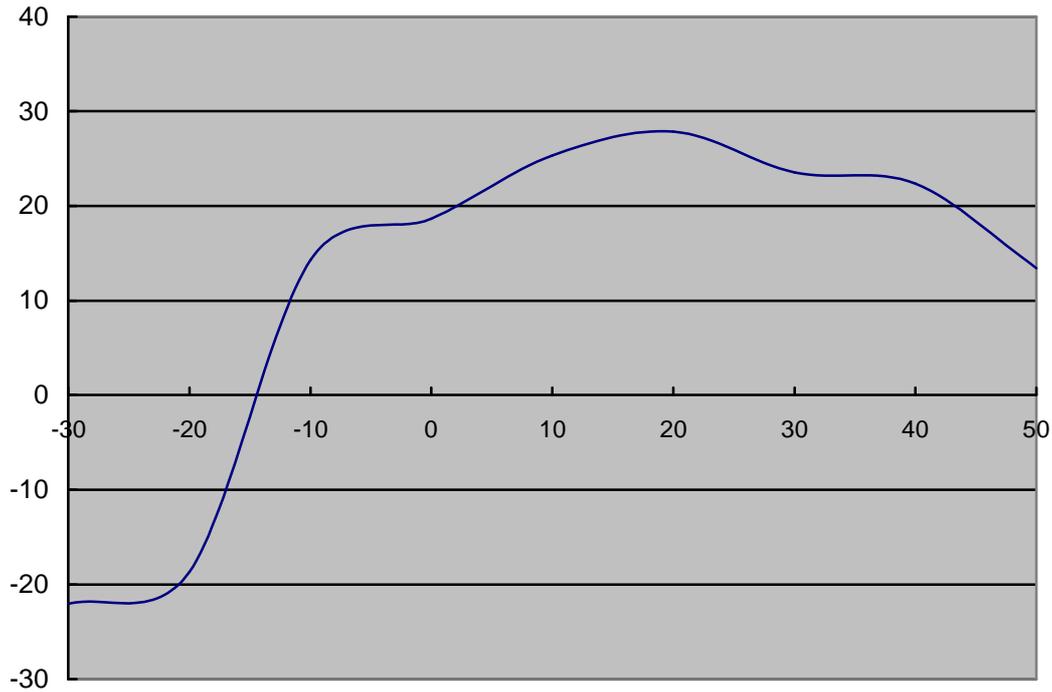


Figure 9.GPRS Mode Test Graph

● **TM2, 5V DC Channel No.192(837.0MHz)**

Table 45 Measurement Results vs. Variation of Temperature – EDGE Mode

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	27	837.0	-29.16	Pass
-20 °C	27	837.0	-21.45	Pass
-10 °C	27	837.0	22.35	Pass
0 °C	27	837.0	15.36	Pass
+10 °C	27	837.0	-11.24	Pass
+20 °C	27	837.0	-10.89	Pass
+30 °C	27	837.0	23.56	Pass
+40 °C	27	837.0	19.24	Pass
+50 °C	27	837.0	21.32	Pass

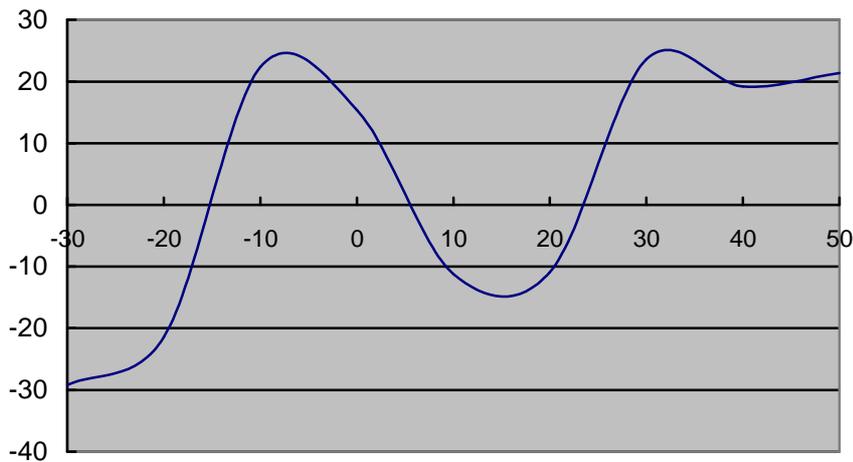


Figure 10. EDGE Mode Test Graph

● **TM3, 5V DC Channel No.4182(836.4MHz)**

Table 46 Measurement Results vs. Variation of Temperature—UMTS Mode

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 ℃	24	836.4	22.17	Pass
-20 ℃	24	836.4	15.62	Pass
-10 ℃	24	836.4	19.56	Pass
0 ℃	24	836.4	14.23	Pass
+10 ℃	24	836.4	15.78	Pass
+20 ℃	24	836.4	23.56	Pass
+30 ℃	24	836.4	-15.23	Pass
+40 ℃	24	836.4	-21.44	Pass
+50 ℃	24	836.4	-10.68	Pass

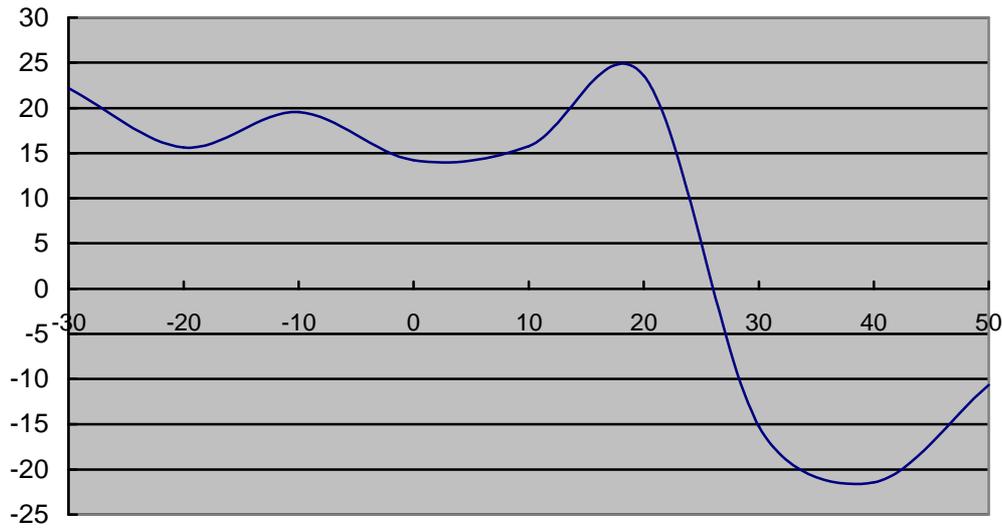


Figure 11. UMTS Mode Test Graph

**6.8.4.2 Measurement Results vs. Variation of Voltage**

- **TM1, 25 °C ,Channel No. 192(837.0MHz)**

Table 47 Measurement Results vs. Variation of Voltage—GPRS Mode

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
4.75	33	837.0	15.63	Pass
5.0	33	837.0	21.35	Pass
5.25	33	837.0	-11.23	Pass

- **TM2, 25 °C ,Channel No. 192(837.0MHz)**

Table 48 Measurement Results vs. Variation of Voltage—EDGE Mode

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
4.75	27	837.0	-15.32	Pass
5.0	27	837.0	18.35	Pass
5.25	27	837.0	15.35	Pass

- **TM3, 25 °C ,Channel No. 4182(836.4MHz)**

Table 49 Measurement Results vs. Variation of Voltage—EDGE Mode

Voltage	Power (dBm)	Nominal Frequency	Measured Frequency Error(Hz)	Result
---------	-------------	-------------------	------------------------------	--------

---

		(MHz)		
4.75	24	836.4	22.34	Pass
5.0	24	836.4	15.36	Pass
5.25	24	836.4	14.26	Pass

### 6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.

## 7 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 50 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U=0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U=2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U=2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U=0.21ppm; k=2
Field Strength of Spurious Radiation	ERP(dBm)	U=2.2dB; k=2
Conducted Output Power	Power(dBm)	U=0.39dB; k=2

## 8 Appendixes


Appendix A	Measurement Results Modulation Characteristics	4 pages
Appendix B	Measurement Results Occupied Bandwidth	10 pages
Appendix C	Measurement Results Band Edges	7 pages
Appendix D	Measurement Results Spurious Emission at Antenna Terminal	28 pages
Appendix E	Measurement Results Radiated Spurious Emission	13 pages

# Appendix A


## Modulation Characteristics

According to FCC Part 2.1047 & Part24 Subpart E


# TM1:GPRS/GSM Channel 661

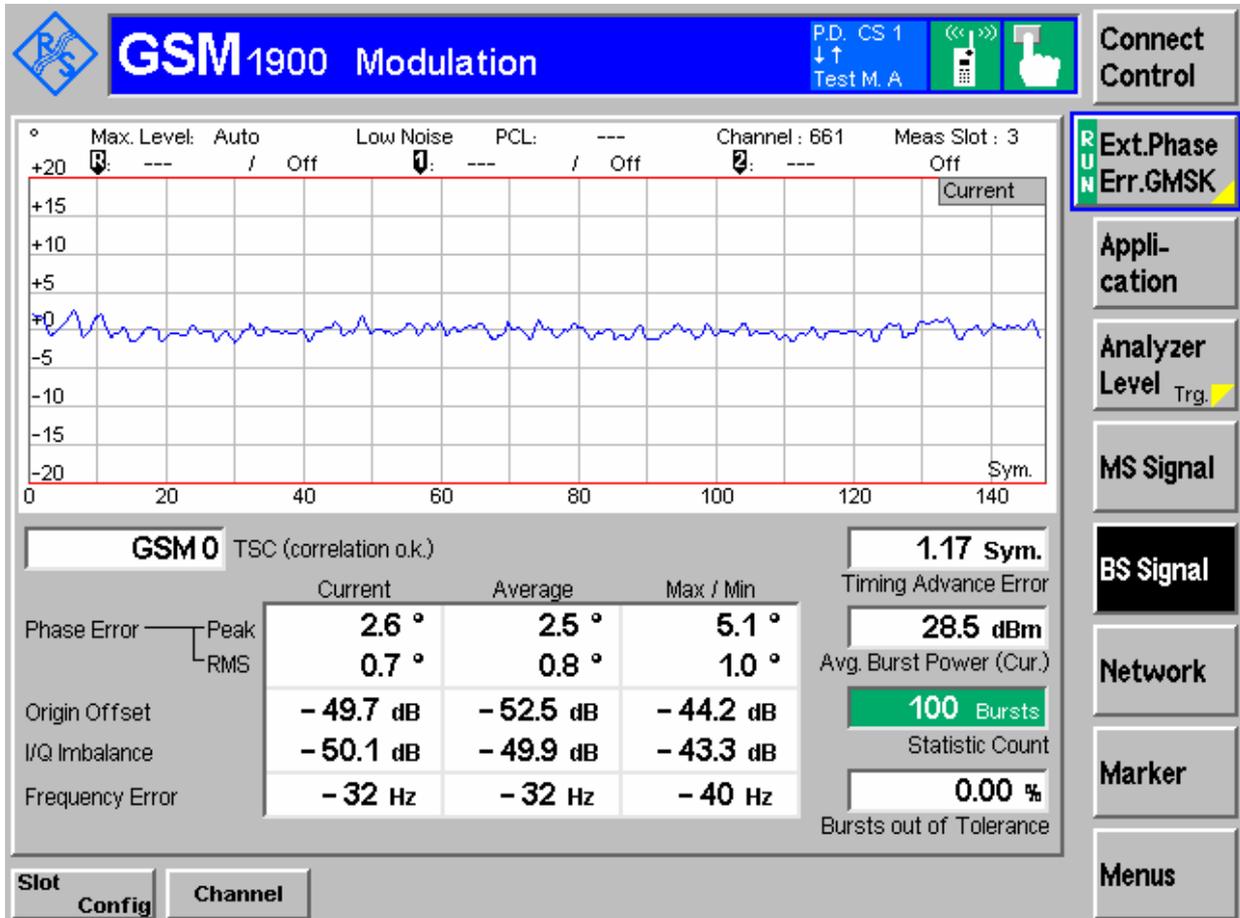

# TM2:EDGE Channel 661

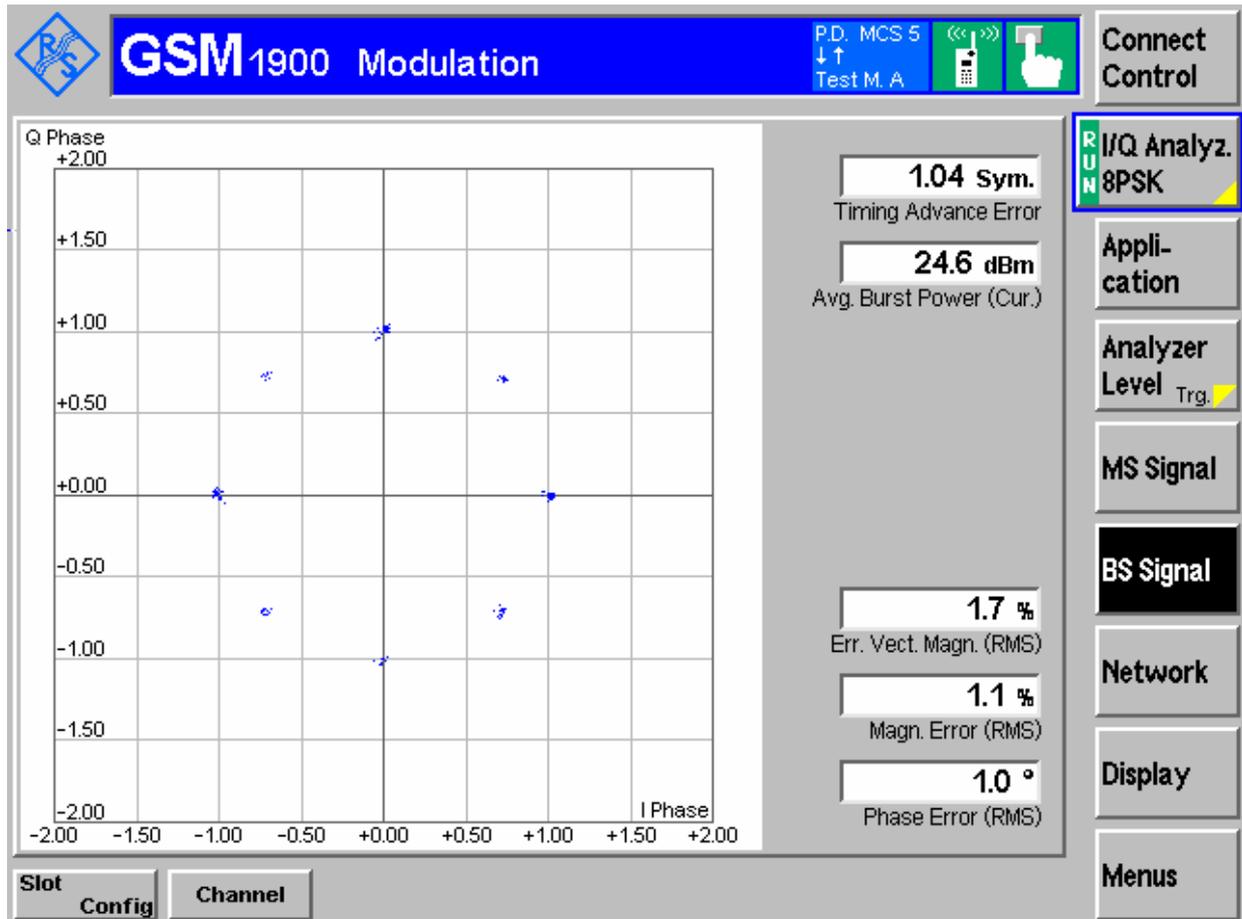

## TM3:HSDPA/WCDMA Channel 9400

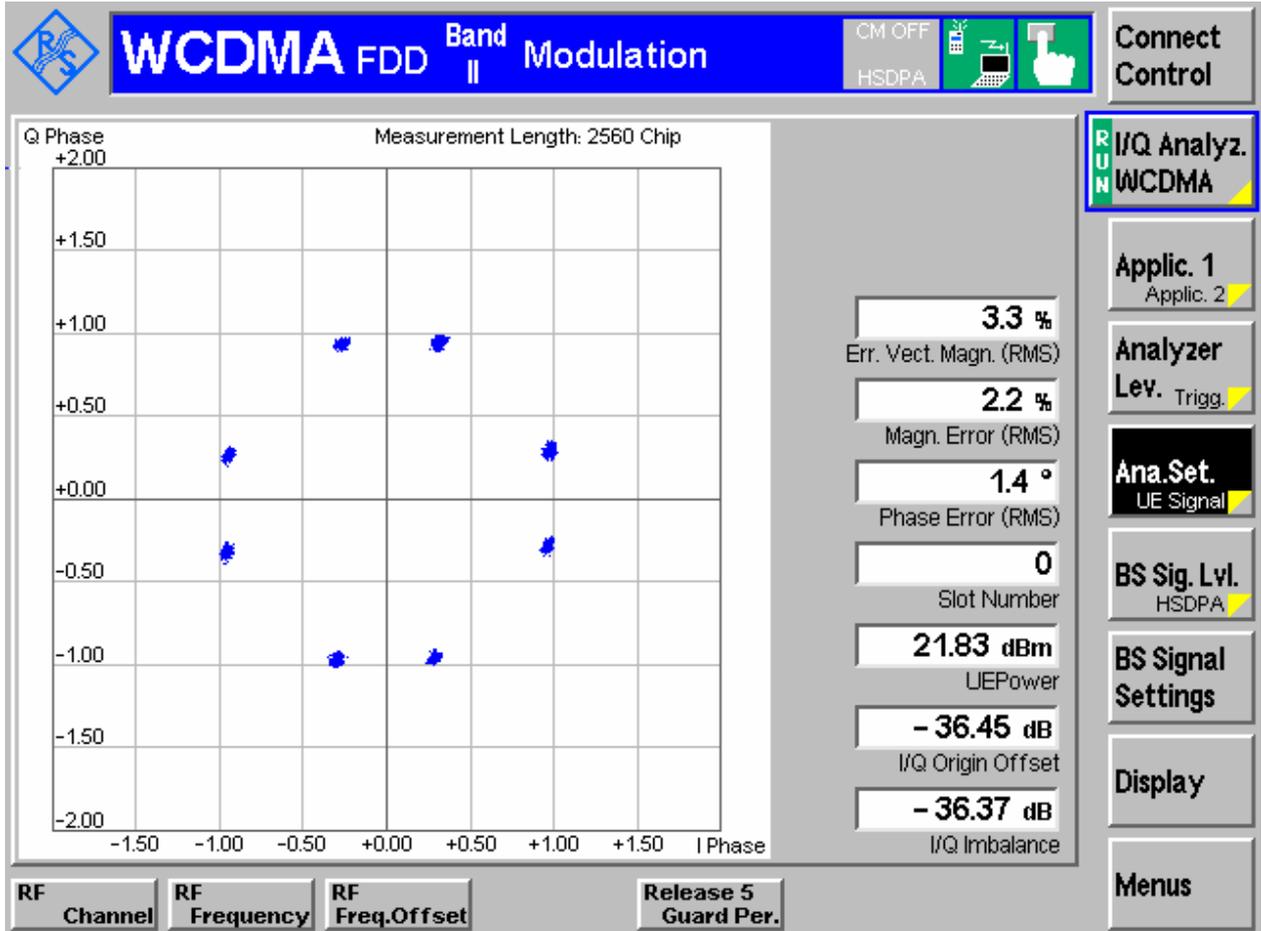

## Appendix B

# Occupied Bandwidth


According to FCC Part 2.1049 & Part 24 Subpart E

# TM1:GPRS/GSM Channel 512



Ref 35 dBm Att 35 dB SWT 115 ms

\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 10 kHz      21.33 dBm  
1.850169551 GHz

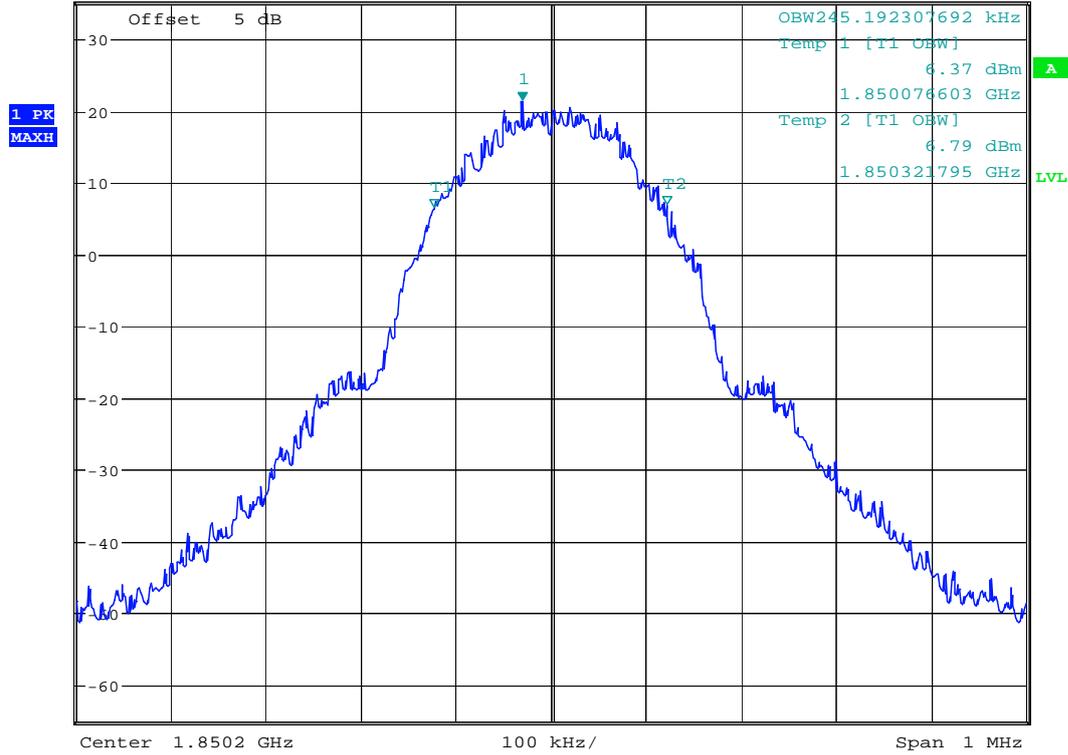


Date: 14.APR.2007 17:54:36

# TM2:EDGE Channel 512



Ref 35 dBm Att 35 dB \*RBW 3 kHz \*VBW 10 kHz SWT 115 ms Marker 1 [T1 ] 18.51 dBm 1.850252885 GHz

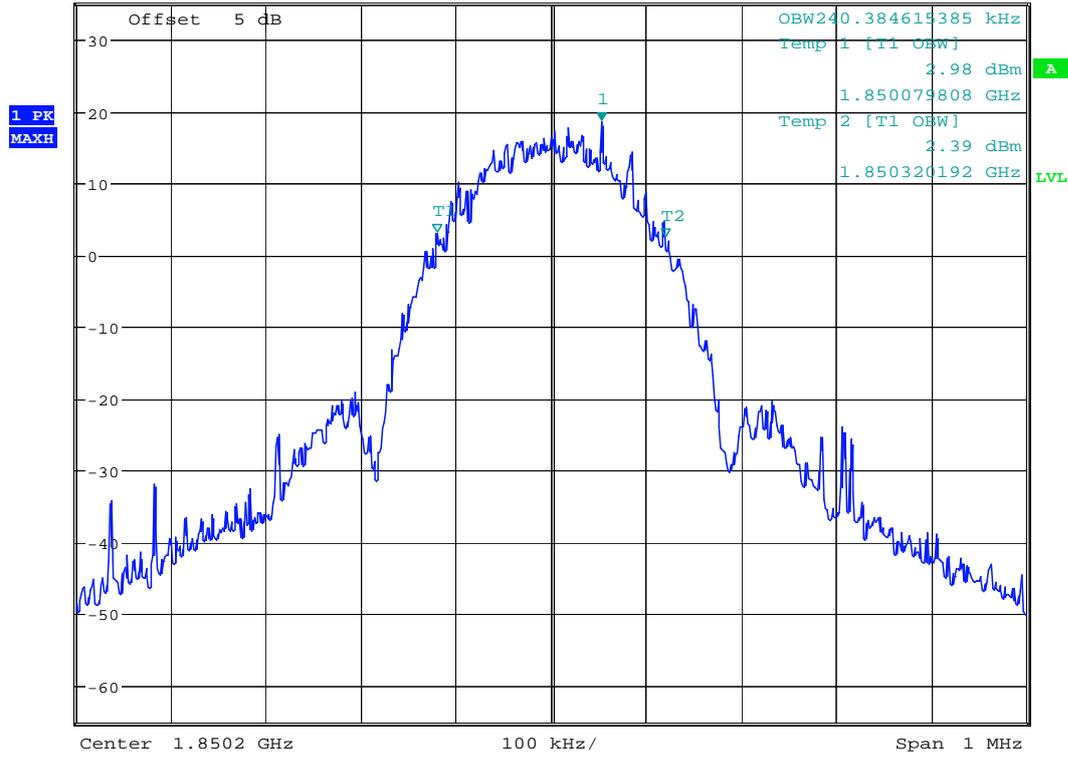

Date: 14.APR.2007 17:59:26


# TM3:HSDPA/WCDMA Channel 9262



\*RBW 50 kHz      Marker 1 [T1 ]  
\*VBW 500 kHz      13.91 dBm  
SWT 5 ms      1.853008974 GHz

Ref 35 dBm

Att 35 dB

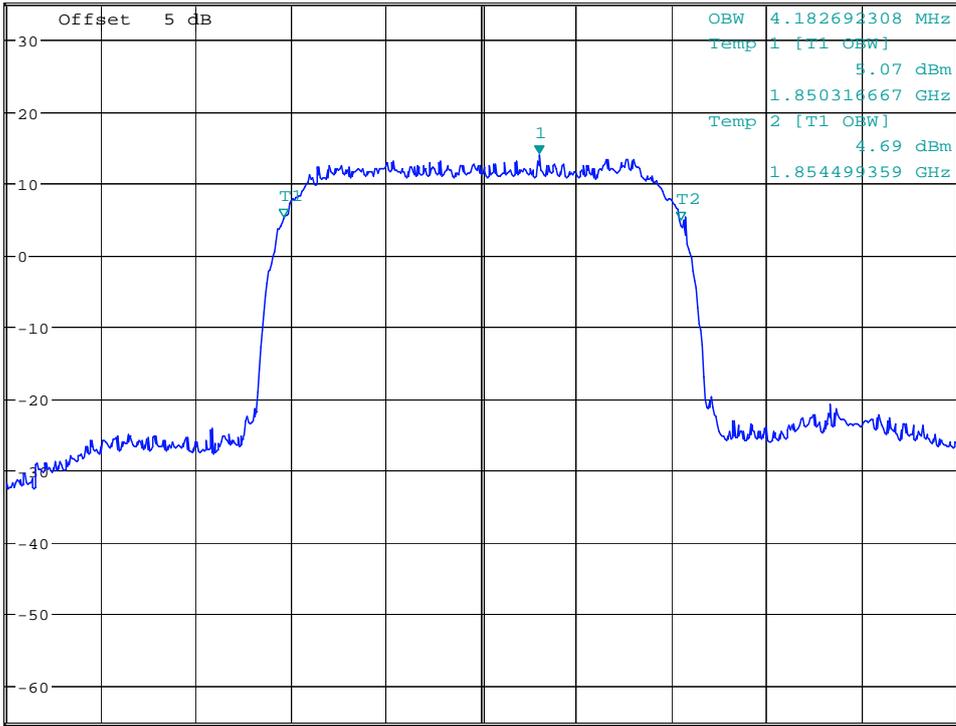


Date: 14.APR.2007 18:06:35

# TM1:GPRS/GSM Channel 661



Ref 35 dBm Att 35 dB \*RBW 3 kHz \*VBW 10 kHz SWT 115 ms Marker 1 [T1 ] 20.22 dBm 1.879955128 GHz

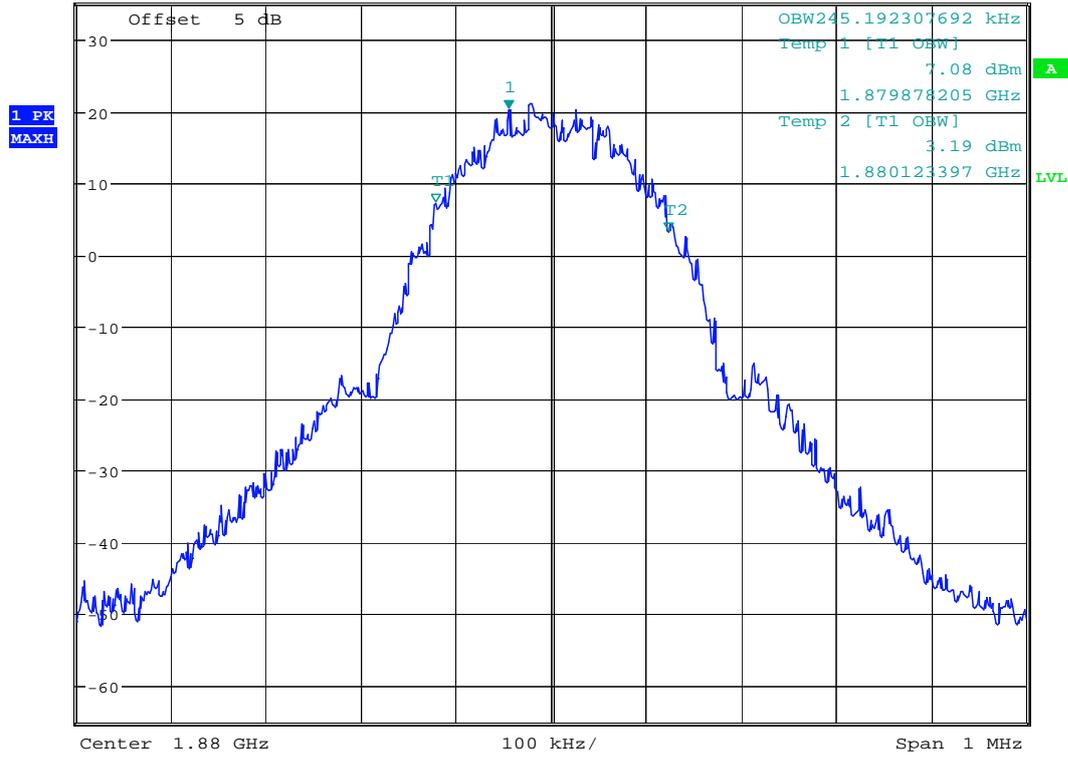

Date: 14.APR.2007 17:55:24


# TM2:EDGE Channel 661



Ref 35 dBm Att 35 dB SWT 115 ms

\*RBW 3 kHz \*VBW 10 kHz

Marker 1 [T1 ] 16.86 dBm 1.880012821 GHz

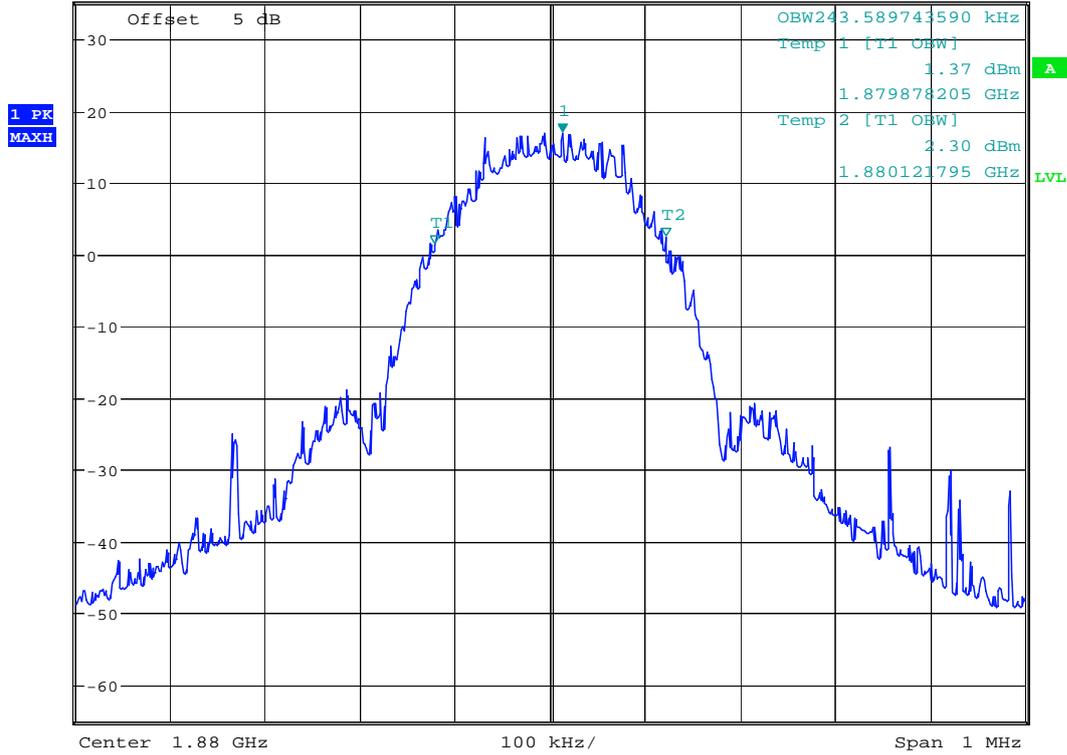

Date: 14.APR.2007 17:58:24


# TM3:HSDPA/WCDMA Channel 9400



\*RBW 50 kHz      Marker 1 [T1 ]  
\*VBW 500 kHz      13.61 dBm  
SWT 5 ms      1.879006410 GHz

Ref 35 dBm

Att 35 dB

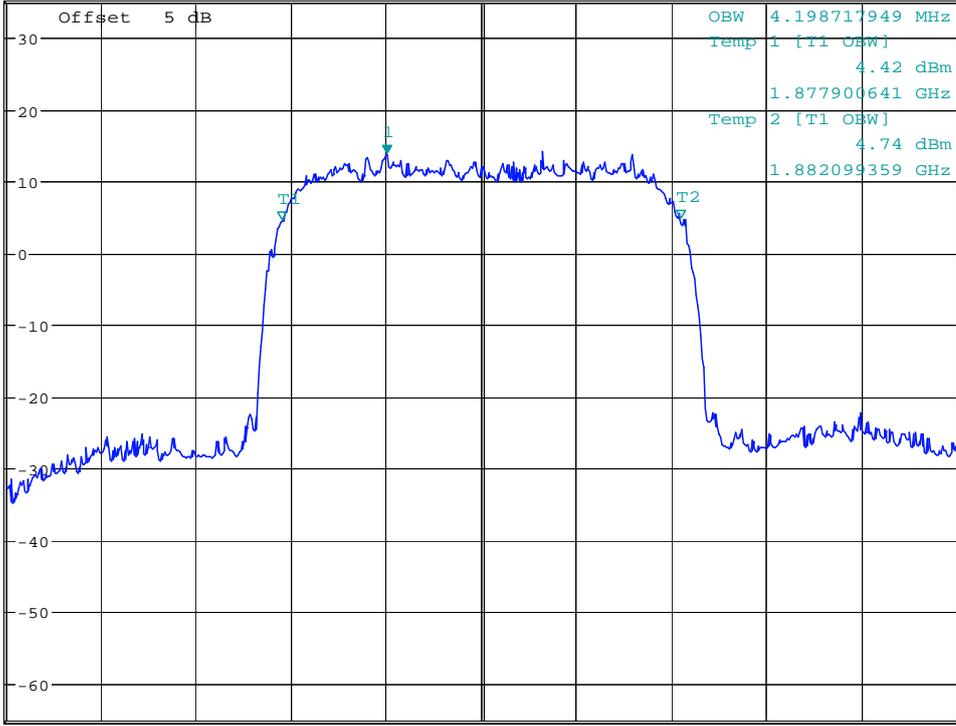


Date: 14.APR.2007 18:07:08

# TM1:GPRS/GSM Channel 810



Ref 35 dBm Att 35 dB \*RBW 3 kHz \*VBW 10 kHz SWT 115 ms Marker 1 [T1] 20.94 dBm 1.909791987 GHz

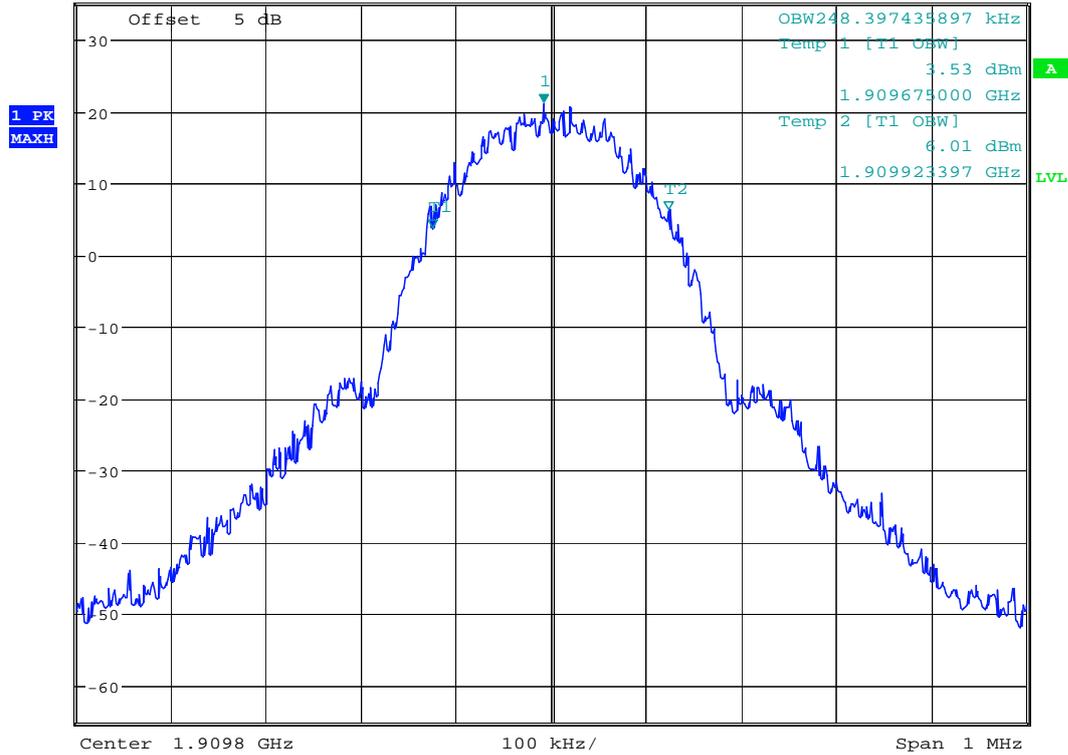


Date: 14.APR.2007 17:56:06

# TM2:EDGE Channel 810



\*RBW 3 kHz  
\*VBW 10 kHz  
Marker 1 [T1 ]  
18.08 dBm  
1.909800000 GHz

Ref 35 dBm Att 35 dB SWT 115 ms

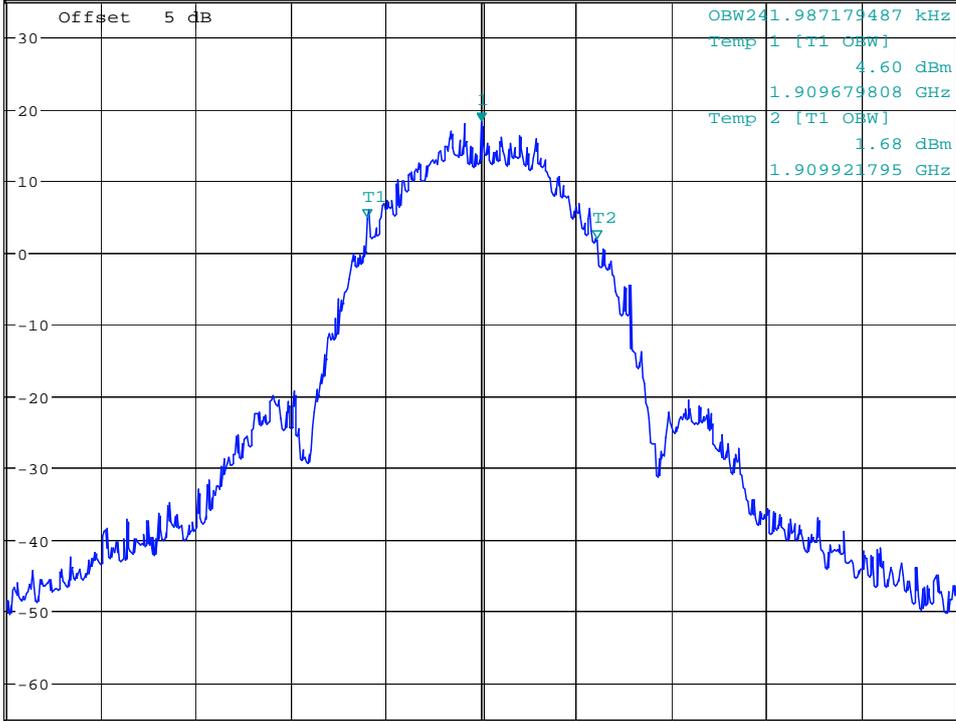

Date: 14.APR.2007 17:57:11


# TM3:HSDPA/WCDMA Channel 9538



\*RBW 50 kHz      Marker 1 [T1 ]  
\*VBW 500 kHz      13.53 dBm  
SWT 5 ms      1.907279487 GHz

Ref 35 dBm

Att 35 dB

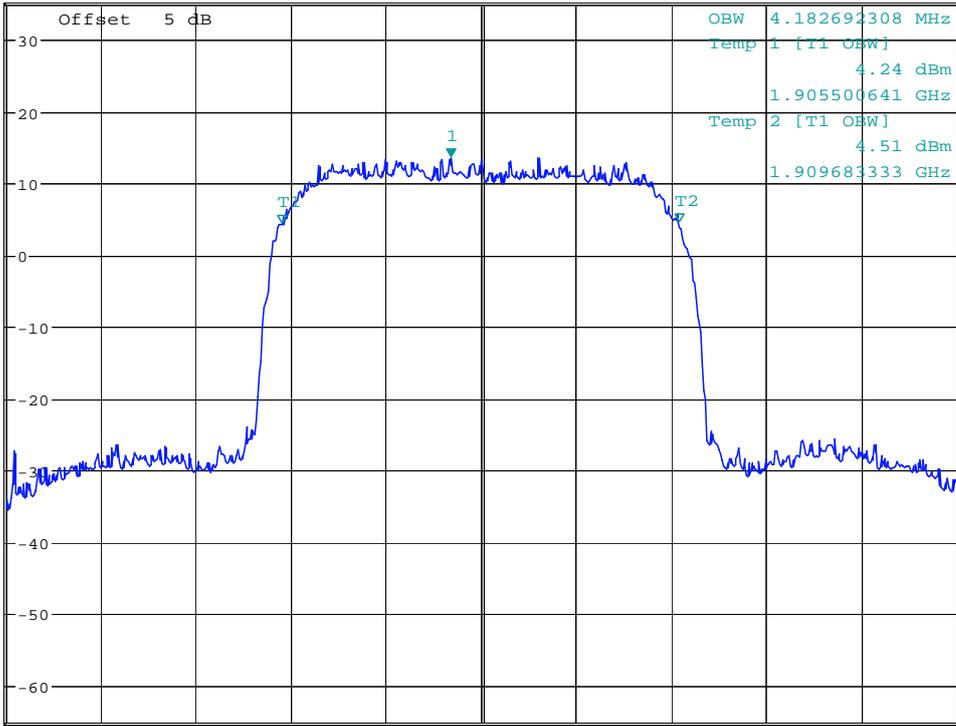

Date: 14.APR.2007 18:07:42

# Appendix C

## Band Edges Compliance According to FCC Part 2.1051 & 24.238


# TM1:GPRS/GSM

## Left Edge

### Channel 512



Ref 35 dBm      Att 55 dB      \*RBW 2 kHz      Marker 1 [T1 ]  
\*VBW 10 kHz      -20.68 dBm  
SWT 500 ms      1.849980769 GHz

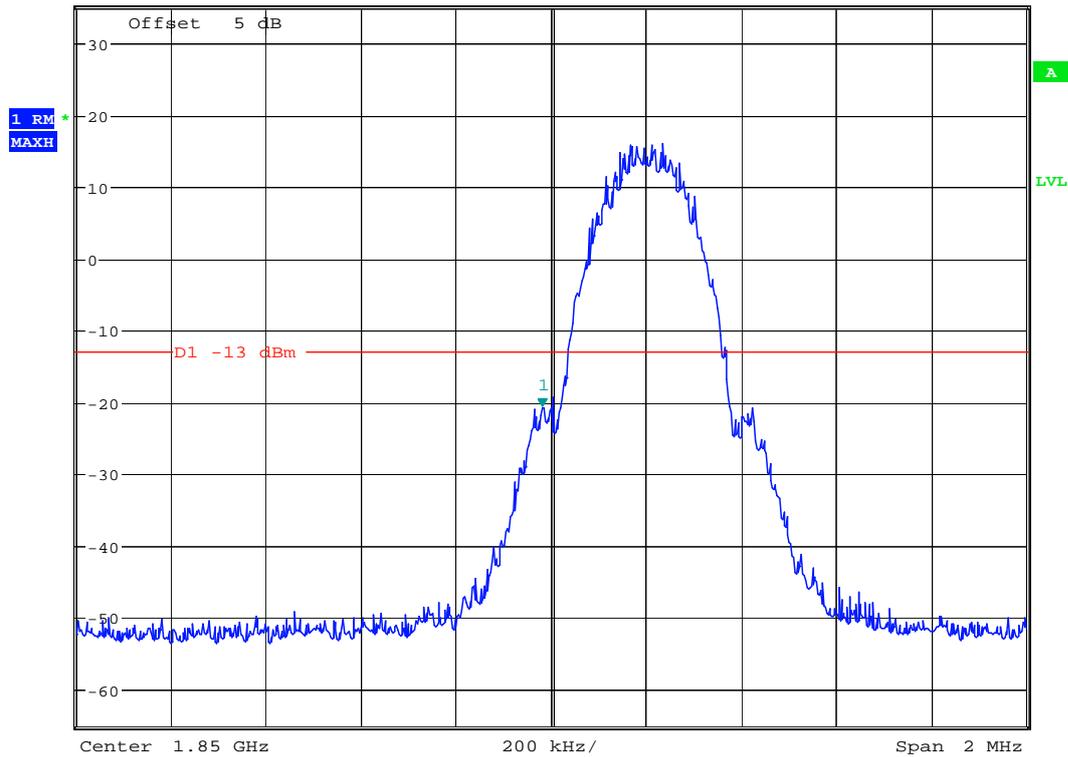


Date: 14.JUN.2007 13:01:05

### Right Edge Channel 810



\*RBW 2 kHz      Marker 1 [T1 ]  
\*VBW 10 kHz      -20.93 dBm  
SWT 500 ms      1.910022436 GHz

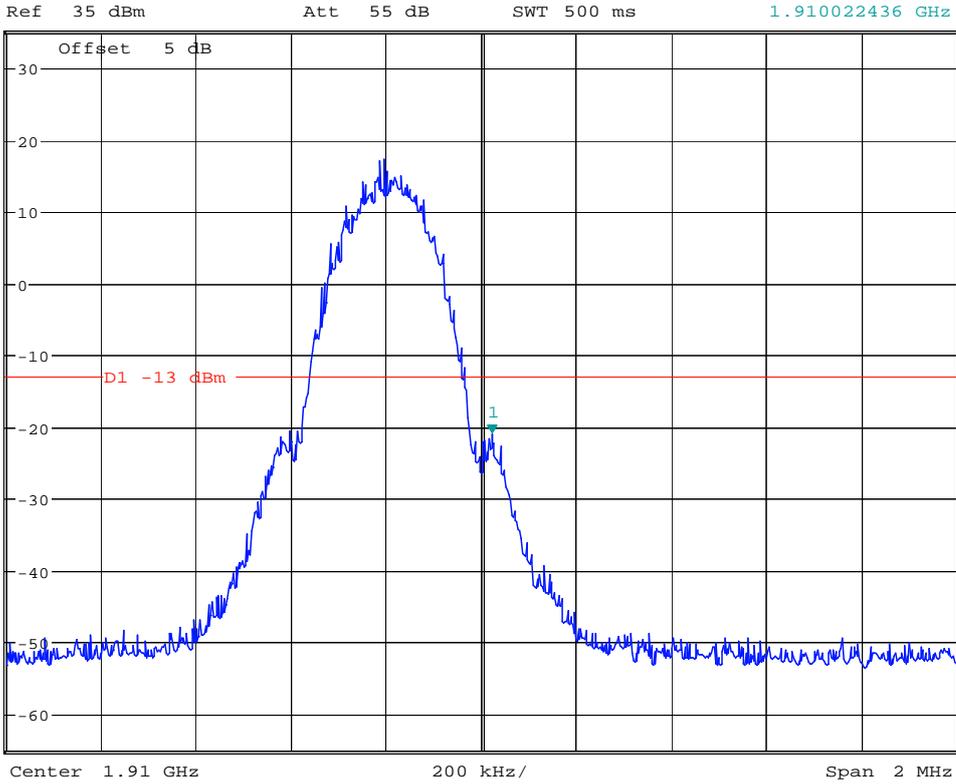


Date: 14.JUN.2007 13:04:41



### Channel 810



Ref 35 dBm      Att 55 dB      \*RBW 2 kHz      Marker 1 [T1 ]  
\*VBW 10 kHz      -25.98 dBm  
SWT 500 ms      1.910035256 GHz

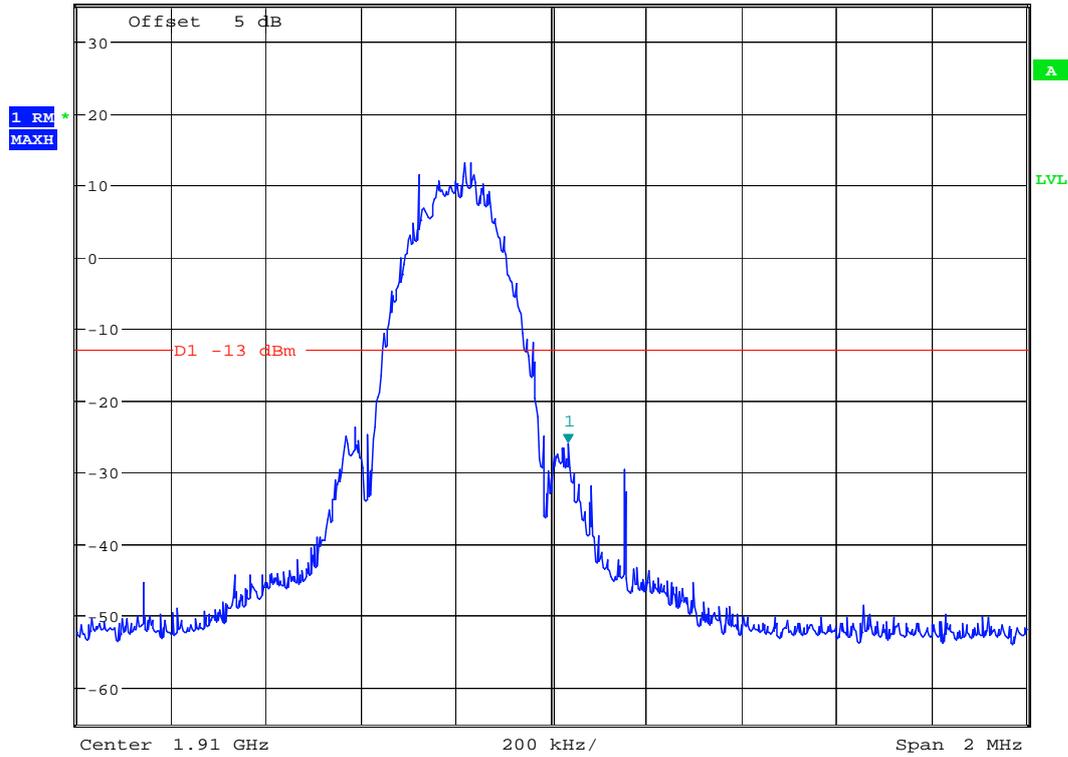


Date: 14.JUN.2007 14:56:53

TM3:HSDPA/WCDMA  
Left Edge  
Channel 9262



Ref 35 dBm Att 55 dB RBW 50 kHz Marker 1 [T1 ]  
\* VBW 200 kHz -24.03 dBm  
SWT 2.5 ms 1.849974359 GHz

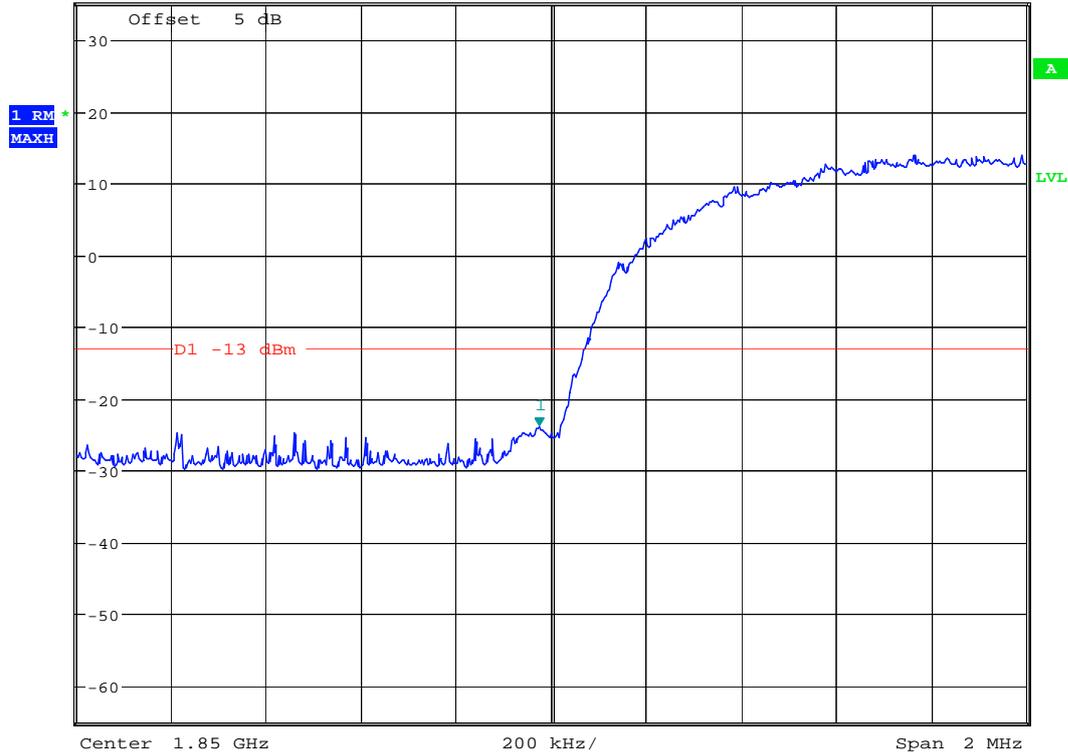

Date: 14.JUN.2007 15:03:07

Right Edge




## Appendix D

# Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & 24.238

# TM1:GPRS/GSM

## Channel 512

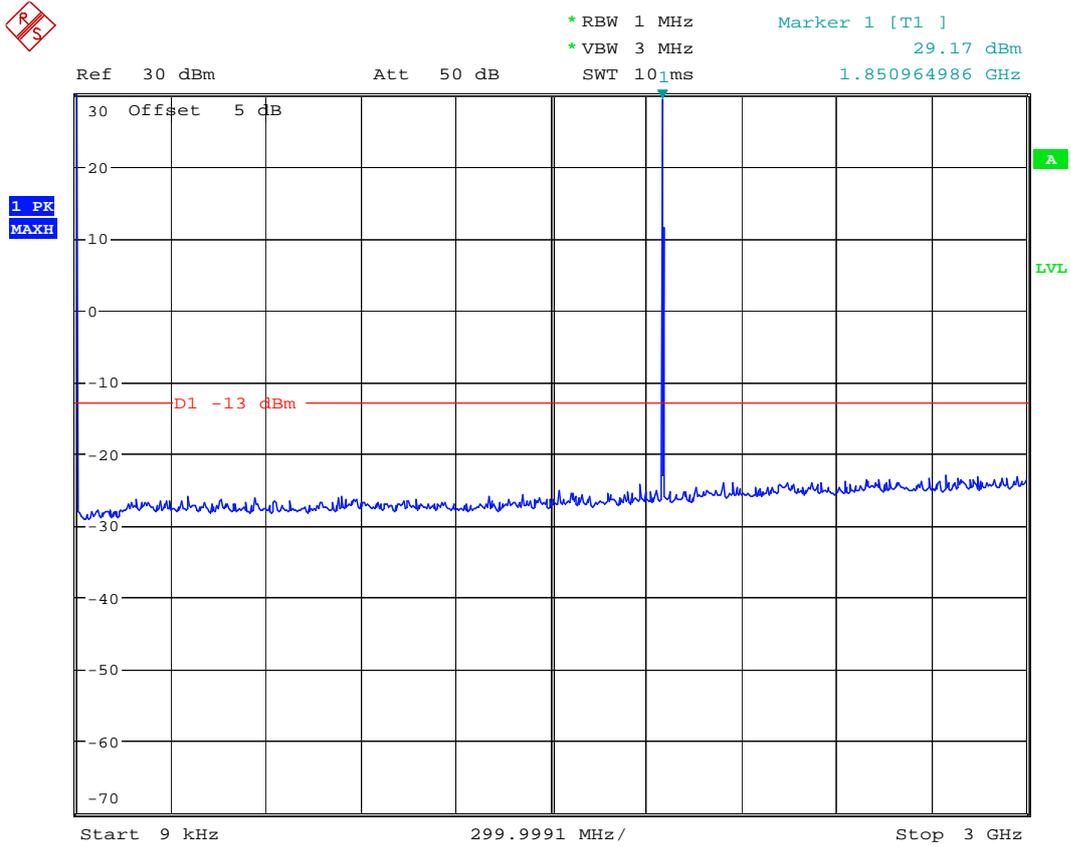

Date: 16.APR.2007 11:42:23




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.27 dBm  
SWT 60 ms      3.328125000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

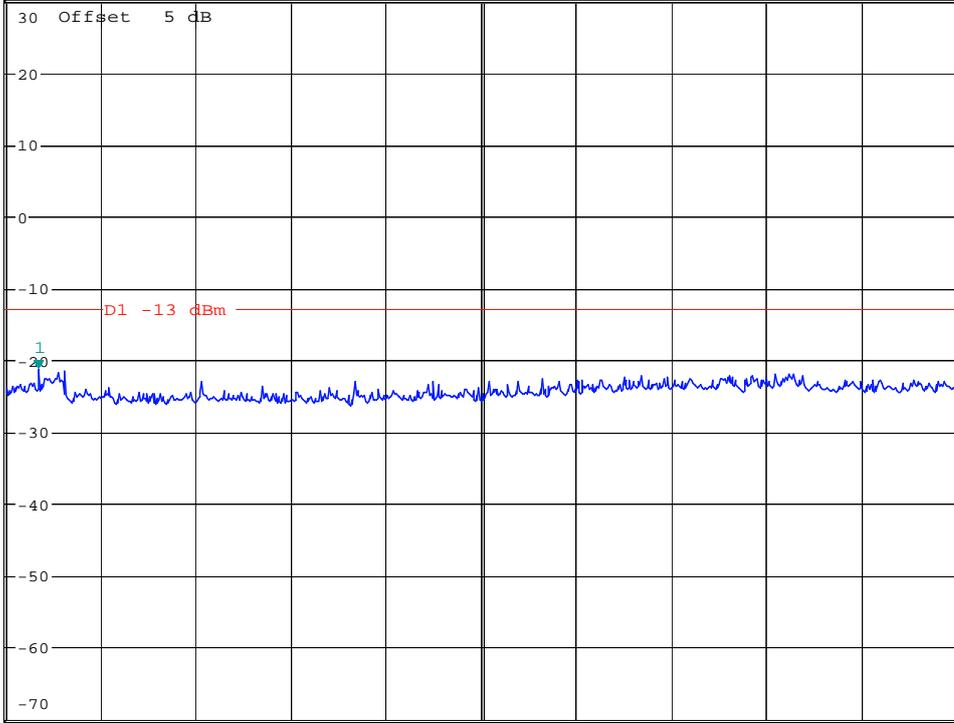

Start 3 GHz

975 MHz/

Stop 12.75 GHz

Date: 16.APR.2007 11:45:12




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -20.33 dBm  
SWT 45 ms      18.175881410 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

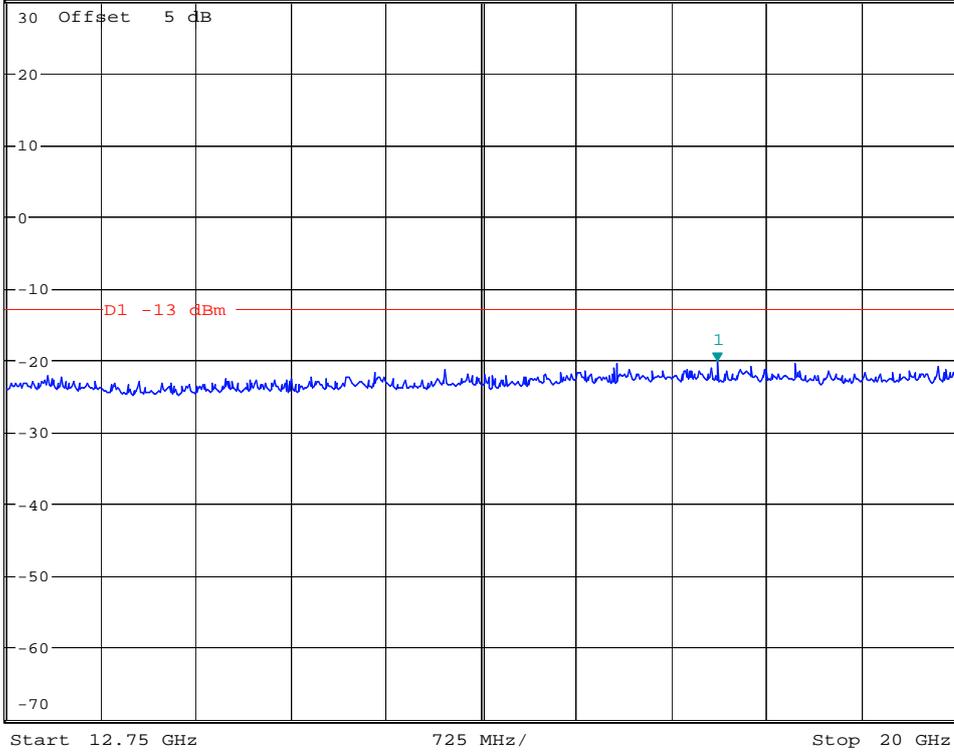


Date: 16.APR.2007 11:47:00

# Channel 661



\*RBW 1 MHz  
\*VBW 3 MHz  
Marker 1 [T1 ]  
29.13 dBm  
1.884618731 GHz

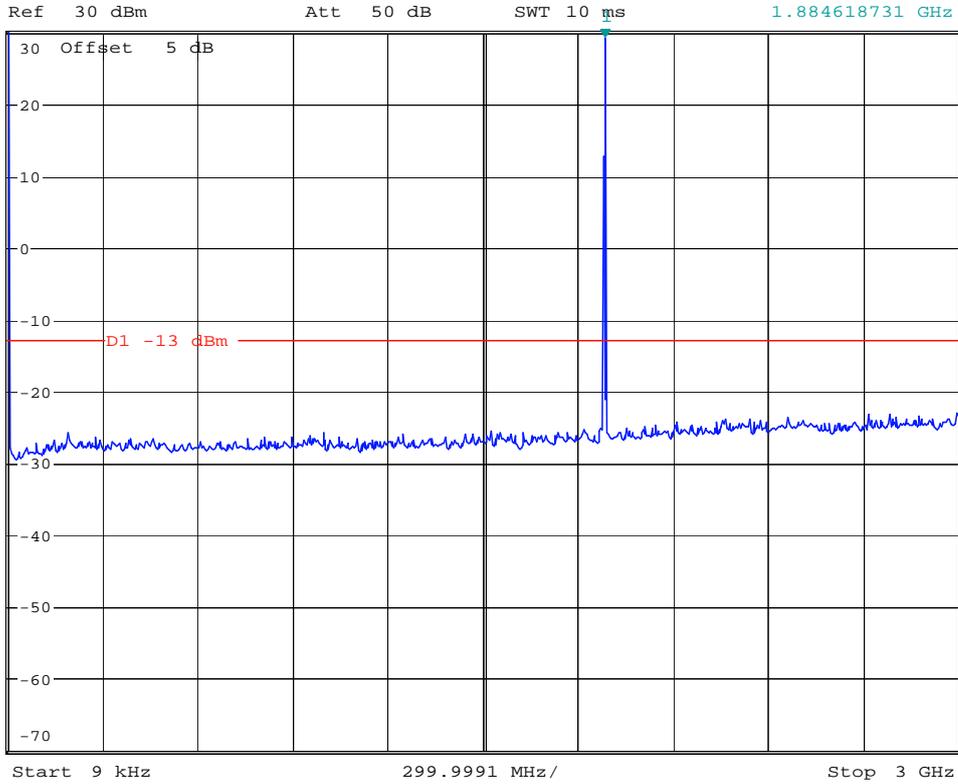

Date: 16.APR.2007 11:48:07




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.44 dBm  
SWT 60 ms      10.968750000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

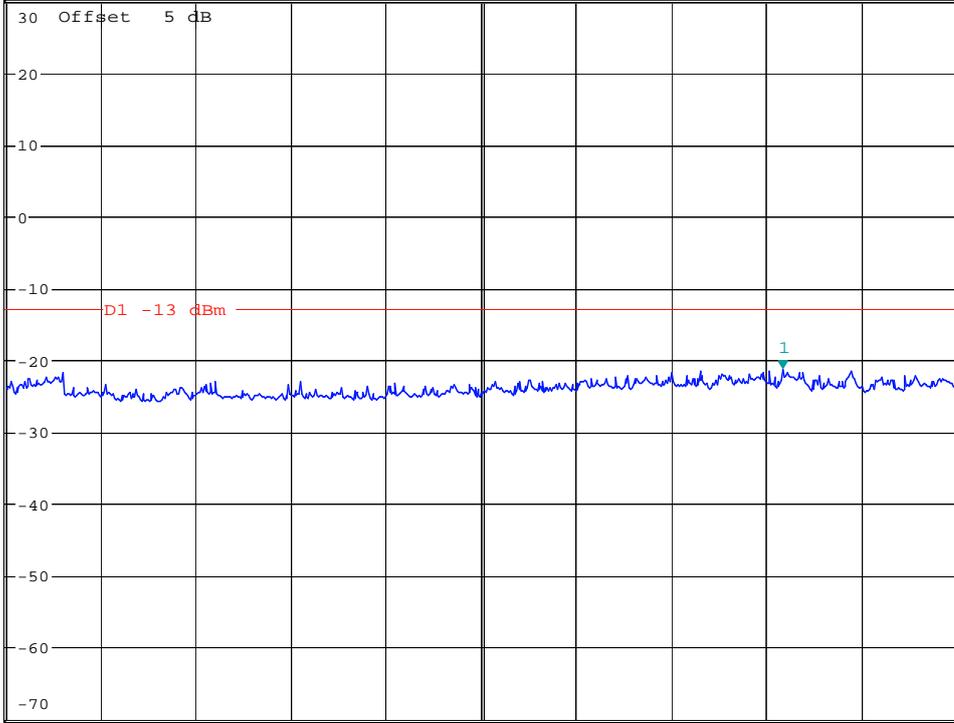

Start 3 GHz

975 MHz/

Stop 12.75 GHz

Date: 16.APR.2007 11:49:30




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.03 dBm  
SWT 45 ms      17.502003205 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

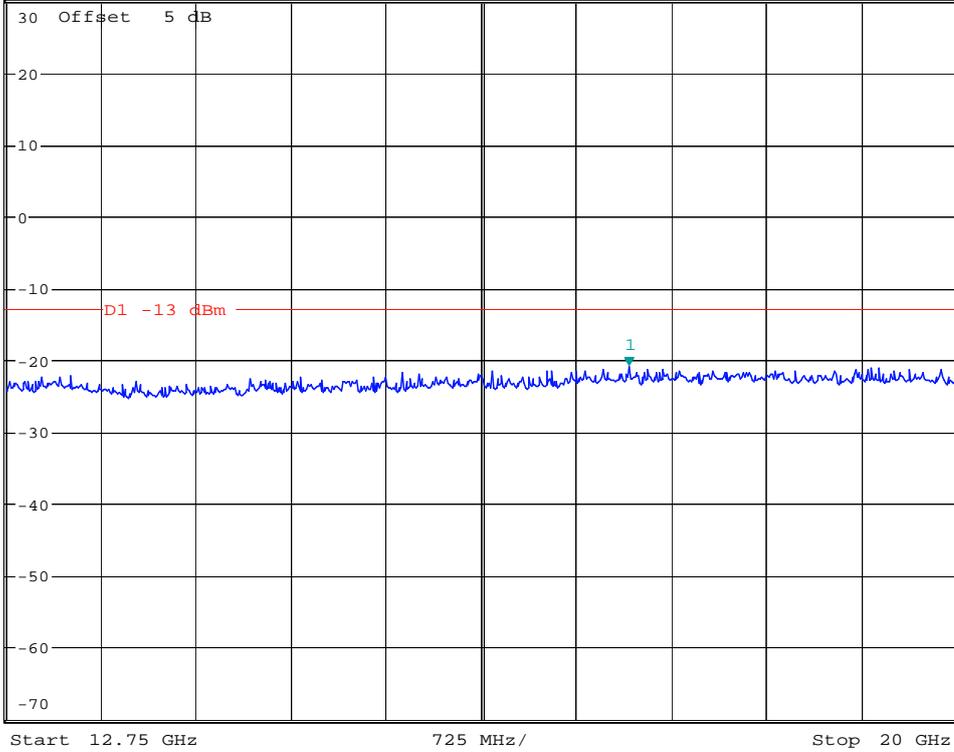


Date: 16.APR.2007 11:51:24

# Channel 810



\*RBW 1 MHz  
\*VBW 3 MHz  
Marker 1 [T1 ]  
28.99 dBm  
1.913464798 GHz

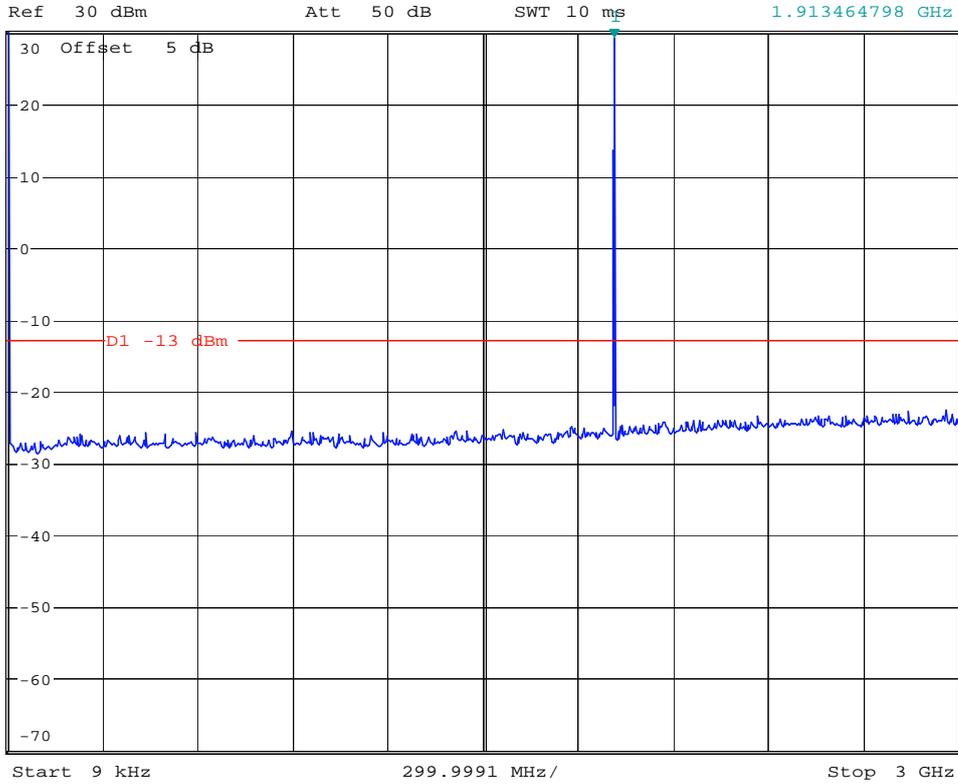

Date: 16.APR.2007 11:53:35




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -20.69 dBm  
SWT 60 ms      3.578125000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

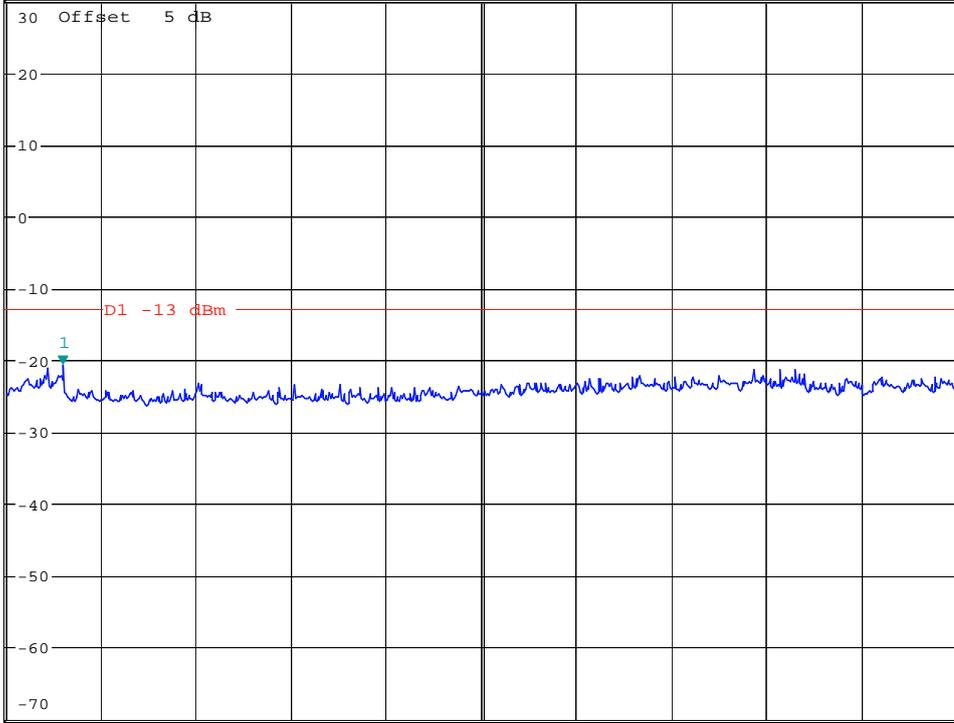

Start 3 GHz

975 MHz/

Stop 12.75 GHz

Date: 16.APR.2007 11:54:39




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -20.13 dBm  
SWT 45 ms      19.883814103 GHz

Ref 30 dBm


Att 50 dB

1 PR  
MAXH

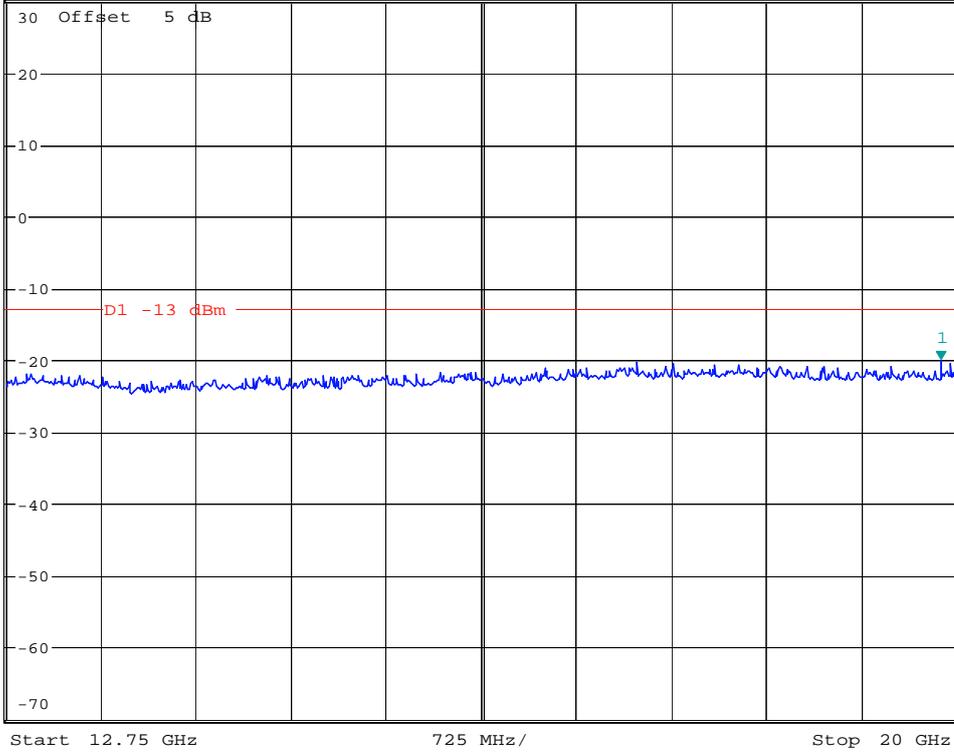

Date: 16.APR.2007 11:56:15

# TM2:EDGE Channel 512

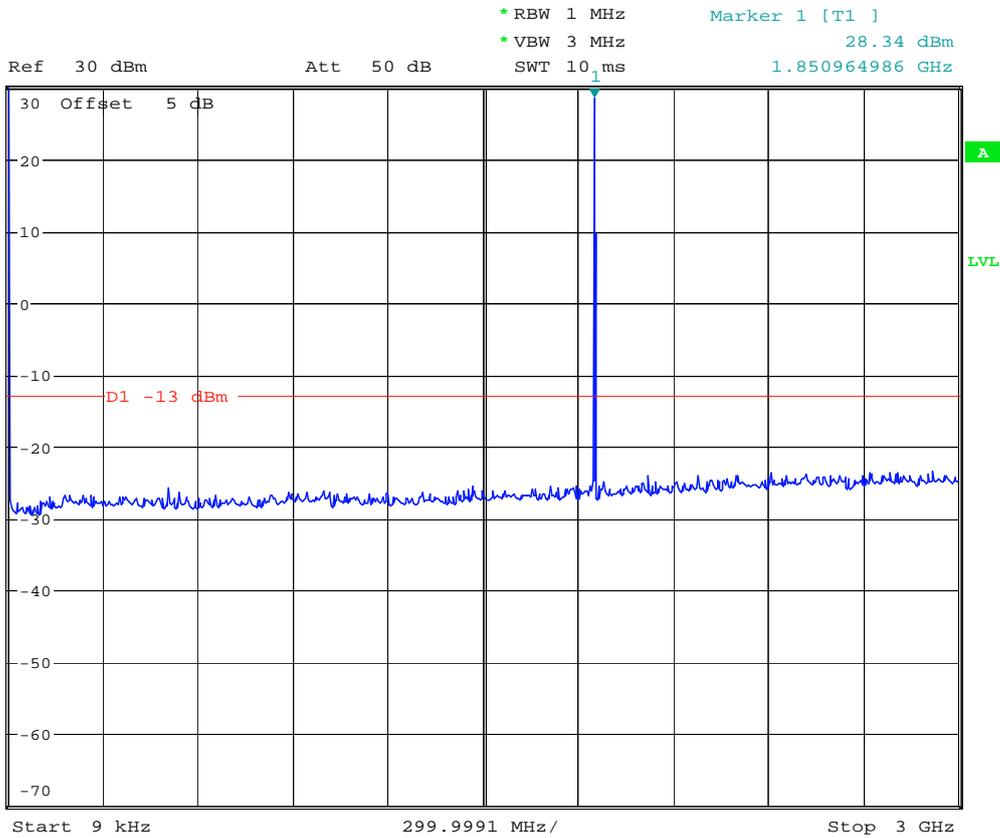

Date: 16.APR.2007 12:00:24




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.81 dBm  
SWT 60 ms      11.000000000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

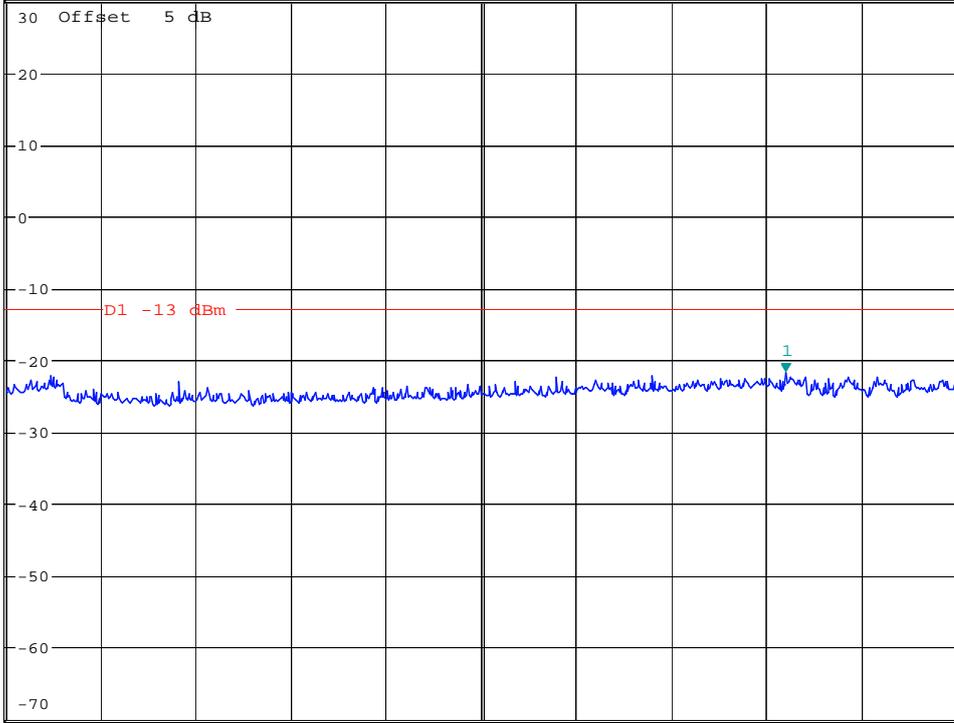

A  
LVL

Start 3 GHz

975 MHz/

Stop 12.75 GHz

Date: 16.APR.2007 12:06:00




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -20.77 dBm  
SWT 45 ms      19.372596154 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

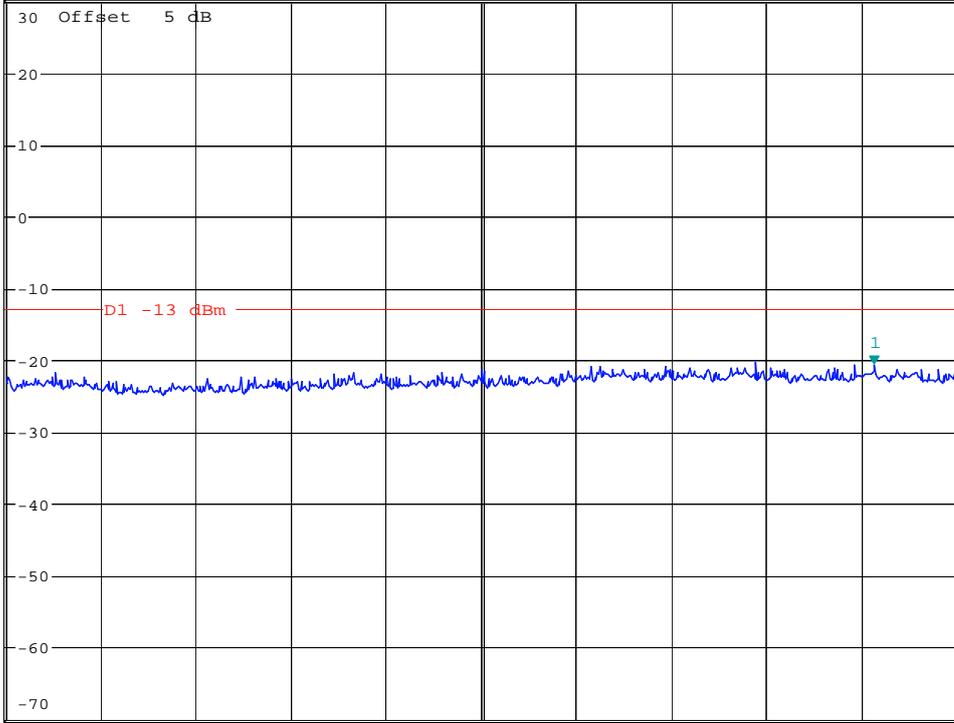

A  
LVL

Start 12.75 GHz

725 MHz/


Stop 20 GHz

Date: 16.APR.2007 12:49:19

# Channel 661



\*RBW 1 MHz  
\*VBW 3 MHz  
Marker 1 [T1 ]  
28.28 dBm  
1.884618731 GHz

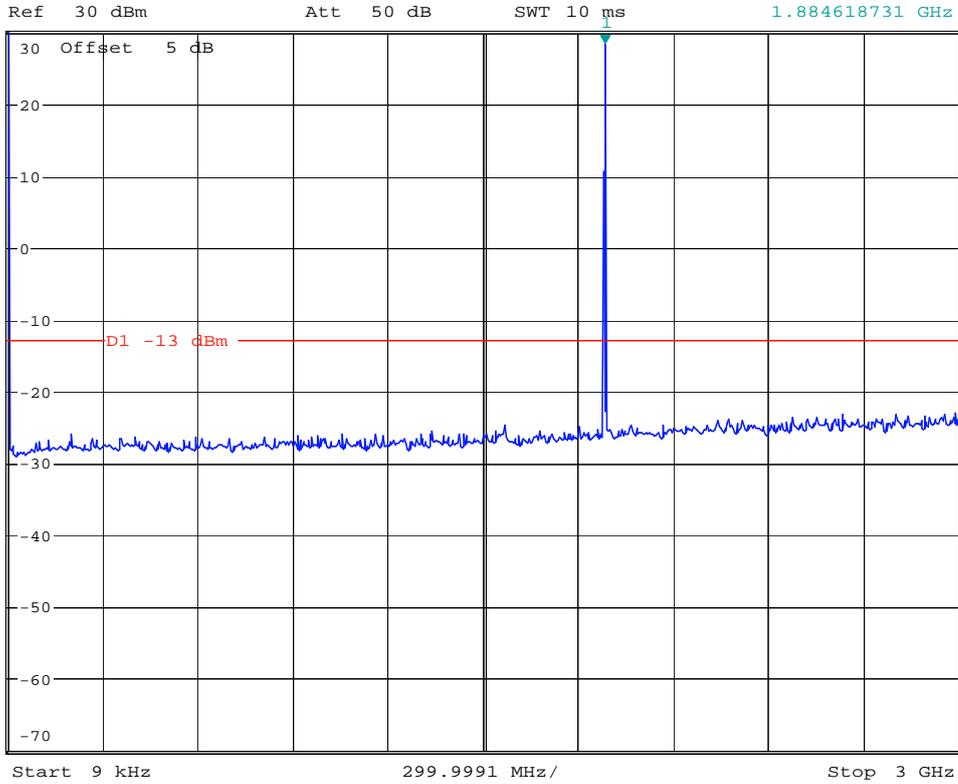

Date: 16.APR.2007 14:06:29




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.38 dBm  
SWT 60 ms      11.000000000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

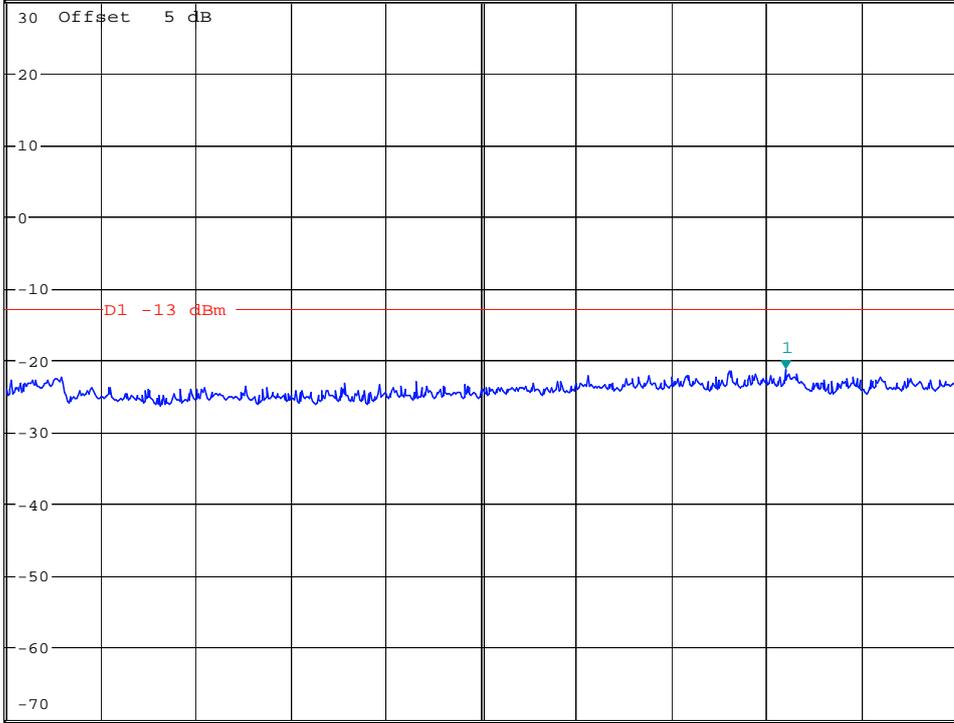

Start 3 GHz

975 MHz/

Stop 12.75 GHz

Date: 16.APR.2007 14:08:14




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -20.67 dBm  
SWT 45 ms      17.455528846 GHz

Ref 30 dBm


Att 50 dB

1 PR  
MAXH

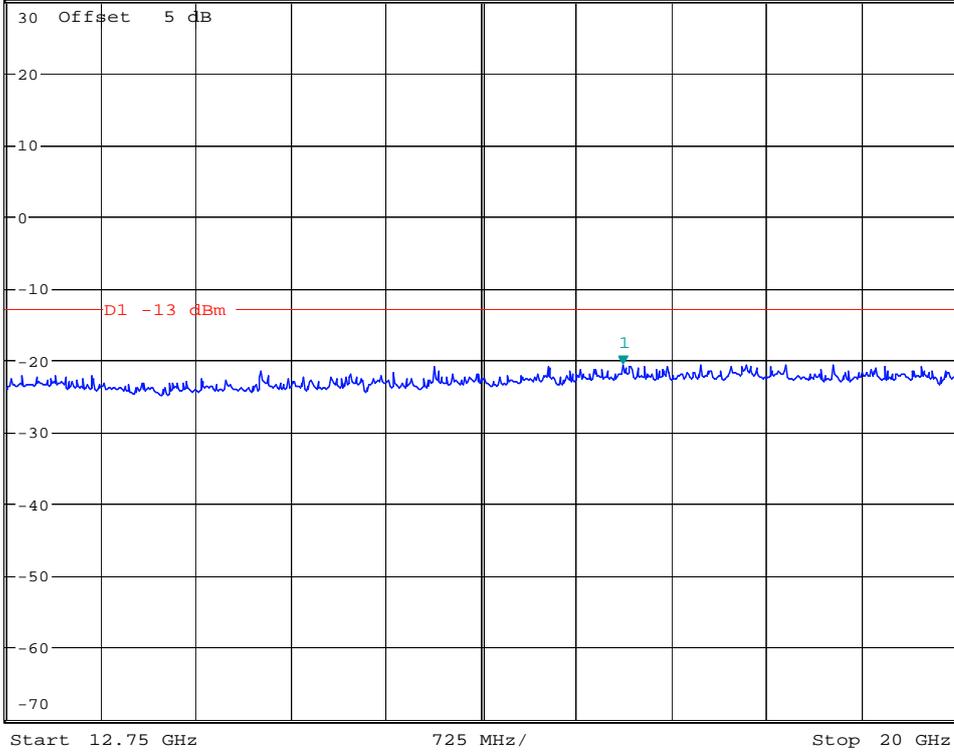

Date: 16.APR.2007 14:09:21

# Channel 810

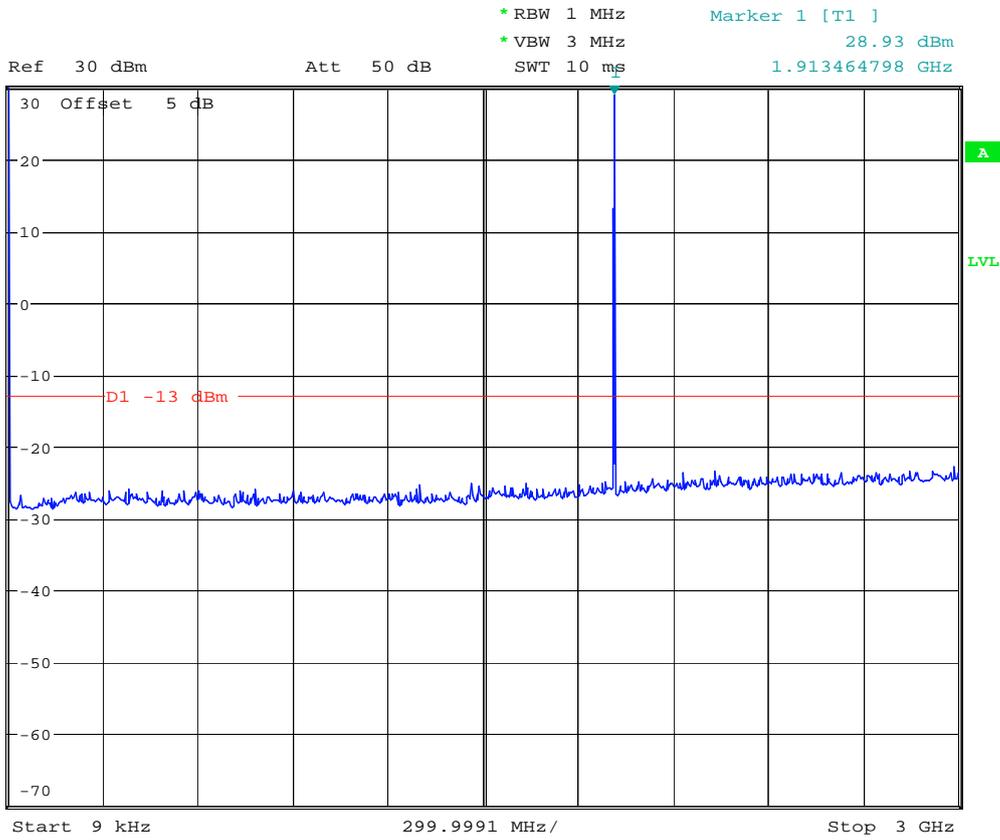

Date: 16.APR.2007 14:10:43




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.38 dBm  
SWT 60 ms      10.015625000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

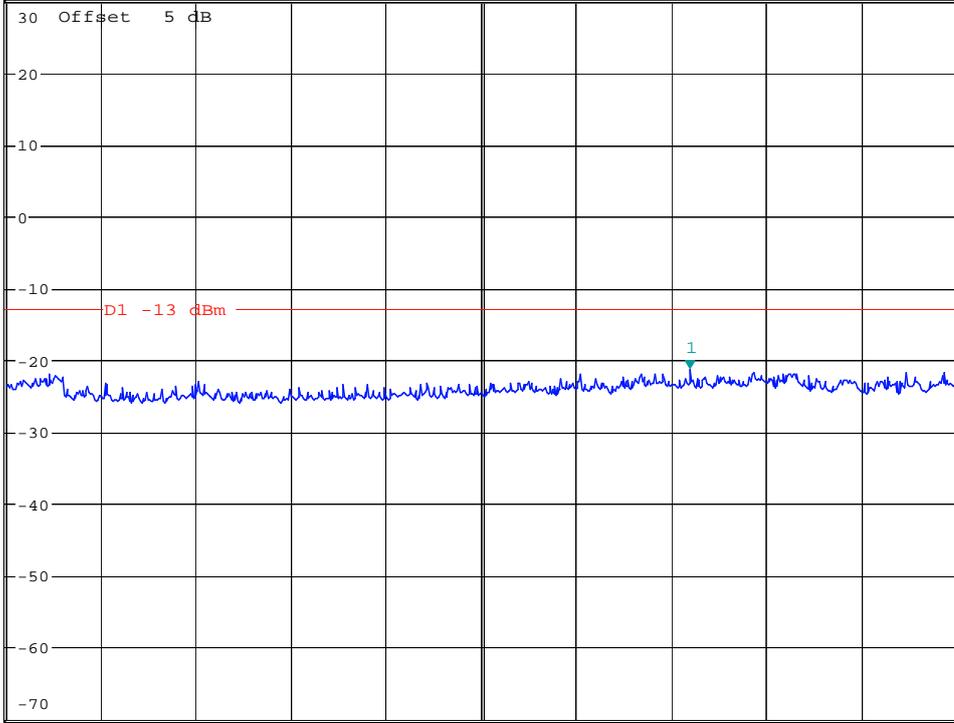

Start 3 GHz

975 MHz/

Stop 12.75 GHz

Date: 16.APR.2007 14:13:07




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -20.36 dBm  
SWT 45 ms      17.780849359 GHz

Ref 30 dBm


Att 50 dB

1 PR  
MAXH

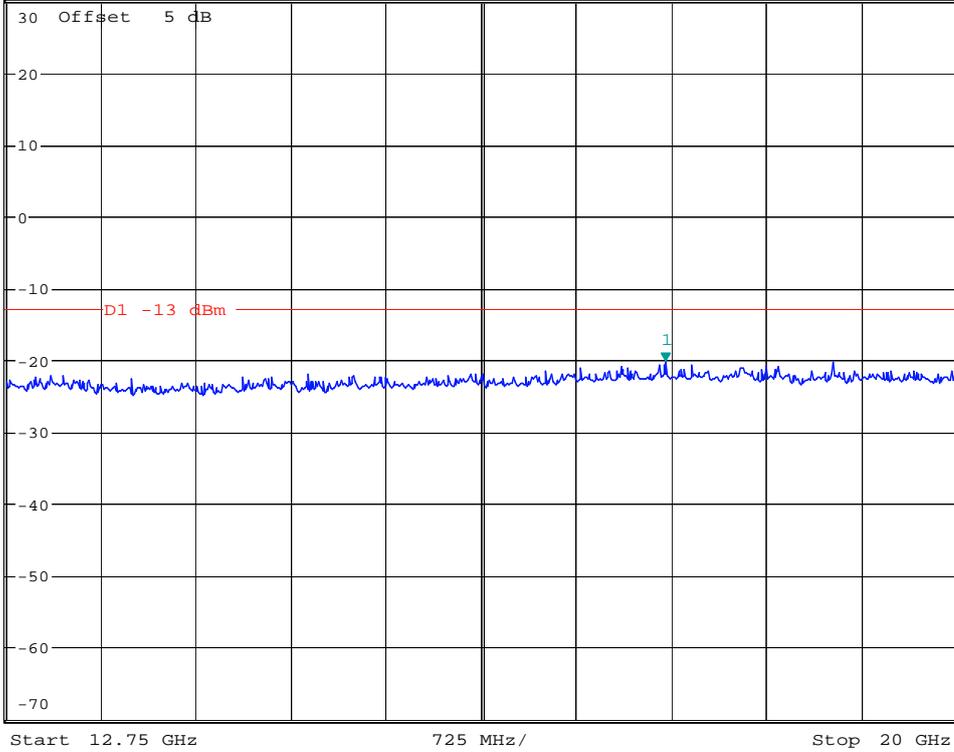

Date: 16.APR.2007 14:14:09

# TM3:HSDPA/WCDMA Channel 9262

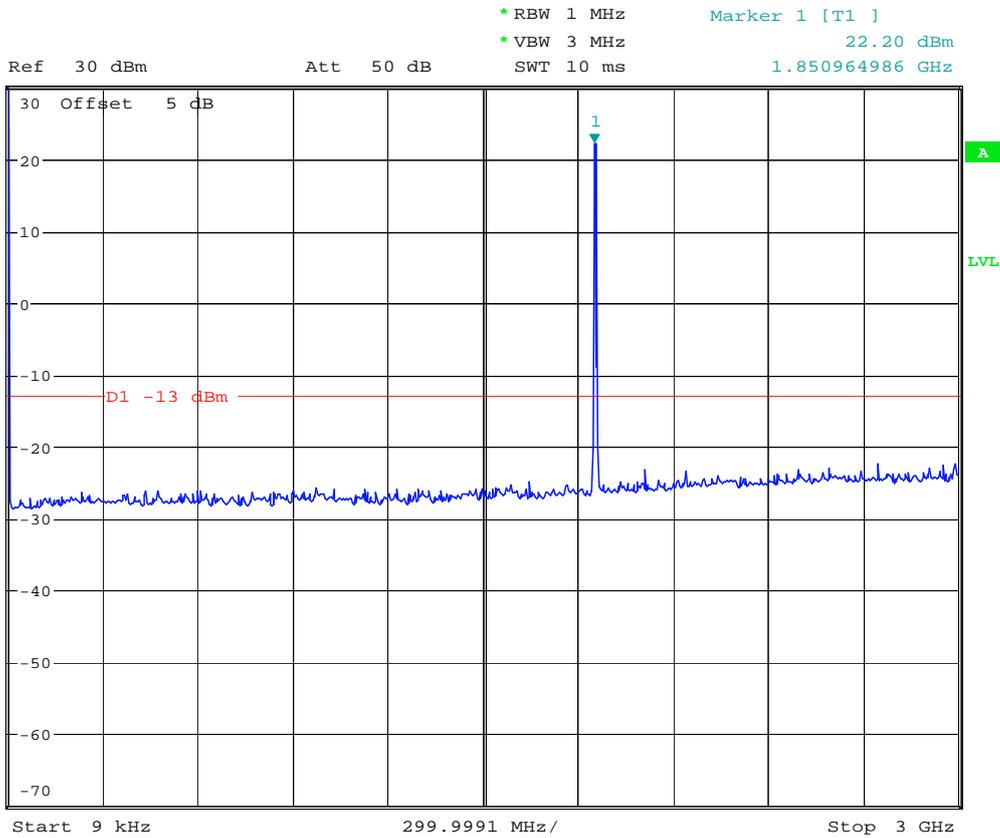

Date: 16.APR.2007 14:20:20




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.59 dBm  
SWT 60 ms      3.578125000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

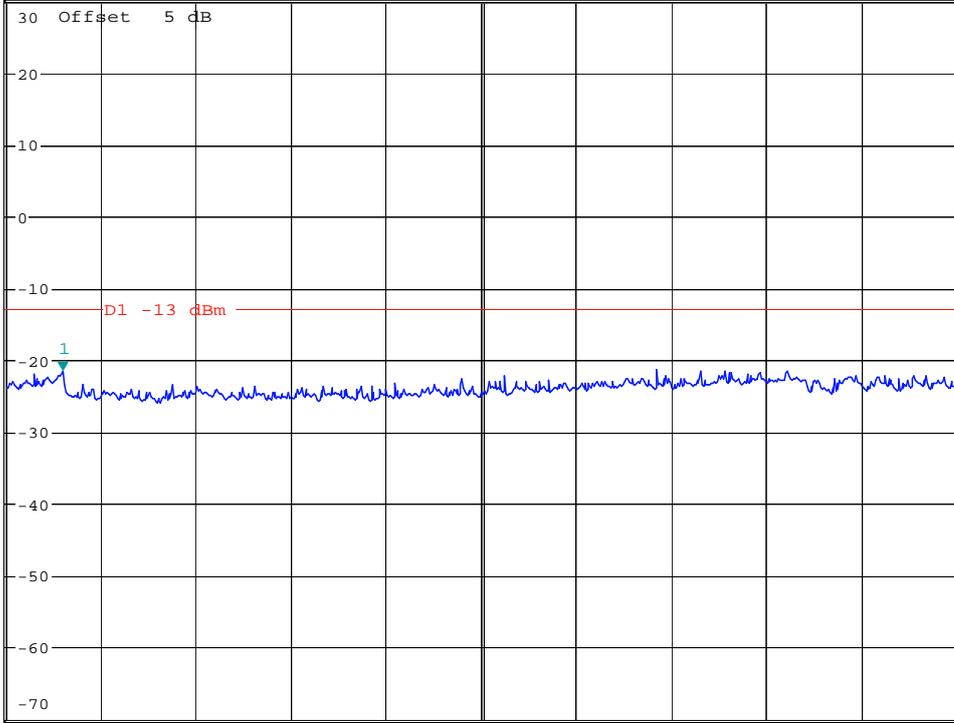

Start 3 GHz

975 MHz/

Stop 12.75 GHz

Date: 16.APR.2007 14:22:00




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -20.08 dBm  
SWT 45 ms      18.303685897 GHz

Ref 30 dBm


Att 50 dB

1 PR  
MAXH

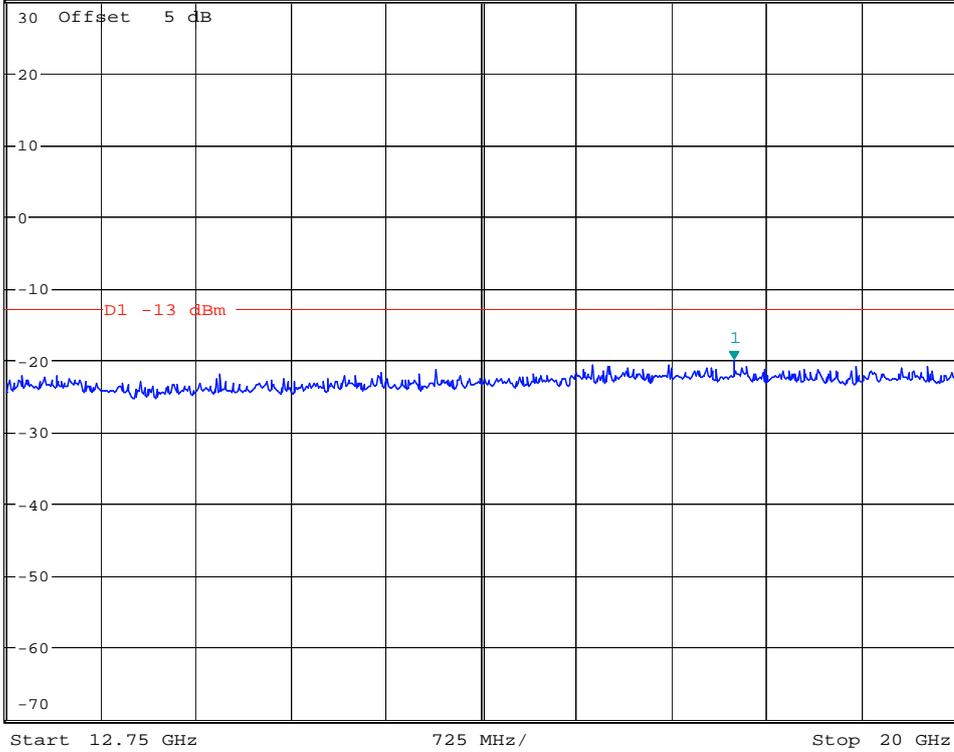

Date: 16.APR.2007 14:22:58

# Channel 9400

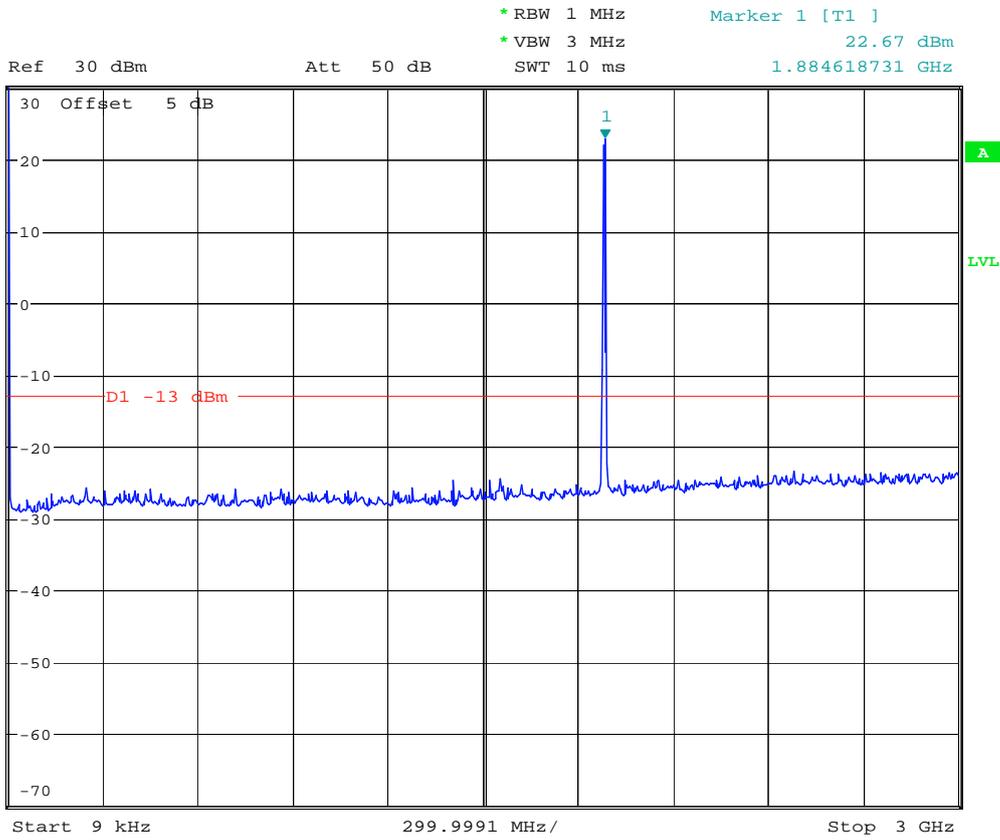

Date: 16.APR.2007 14:23:59




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.22 dBm  
SWT 60 ms      9.718750000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

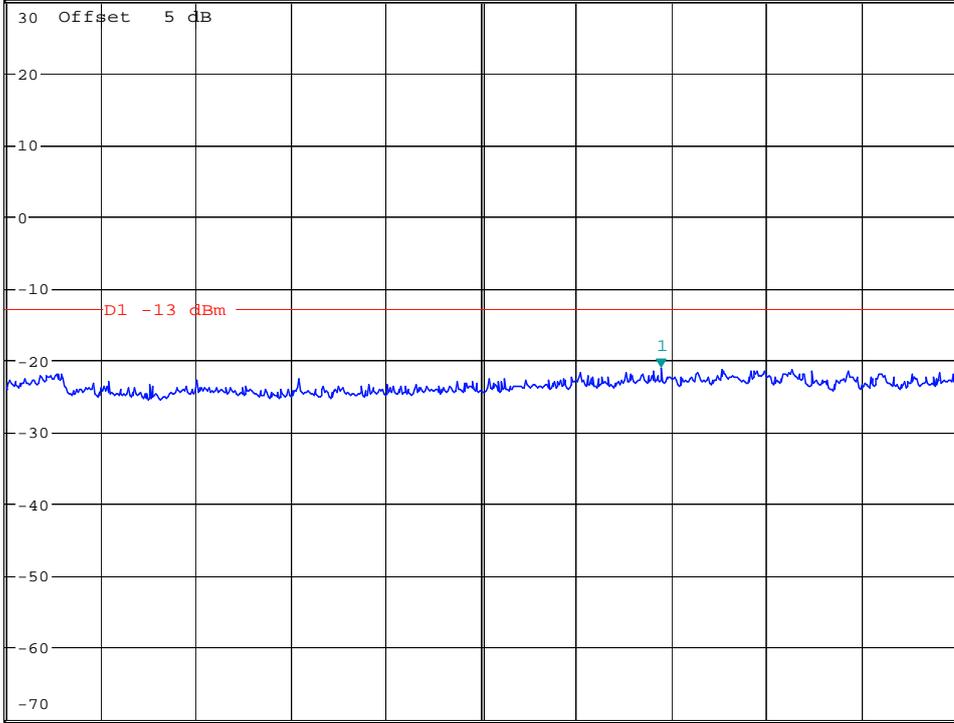

Start 3 GHz


975 MHz/

Stop 12.75 GHz

Date: 16.APR.2007 14:27:03




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -19.66 dBm  
SWT 45 ms      17.443910256 GHz

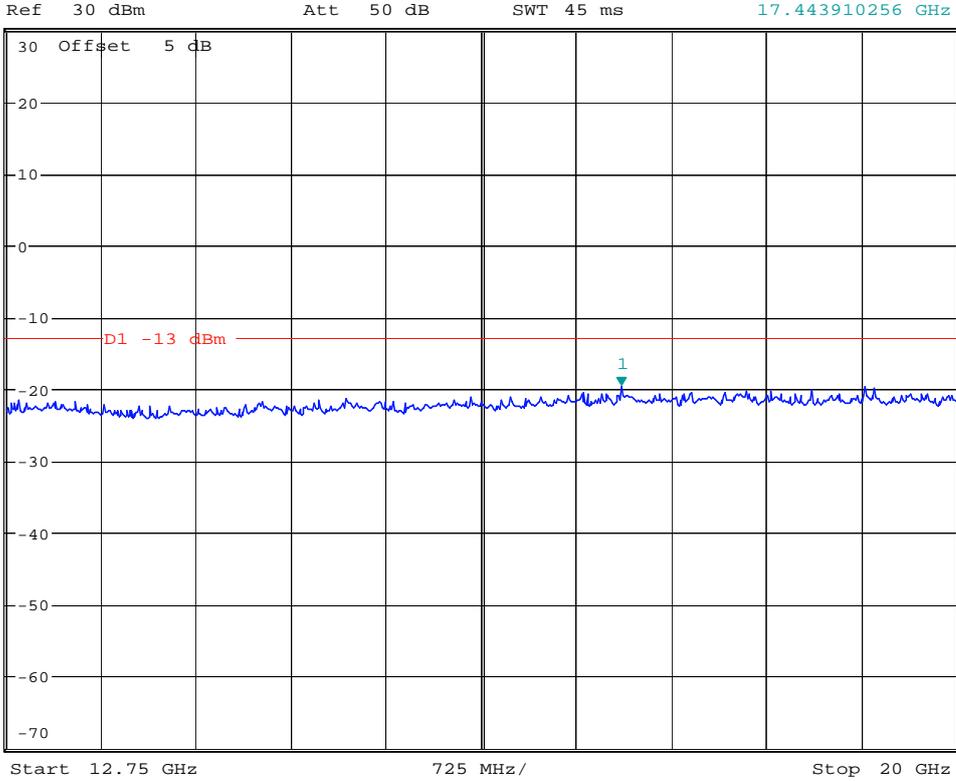

Date: 16.APR.2007 14:31:55

# Channel 9538

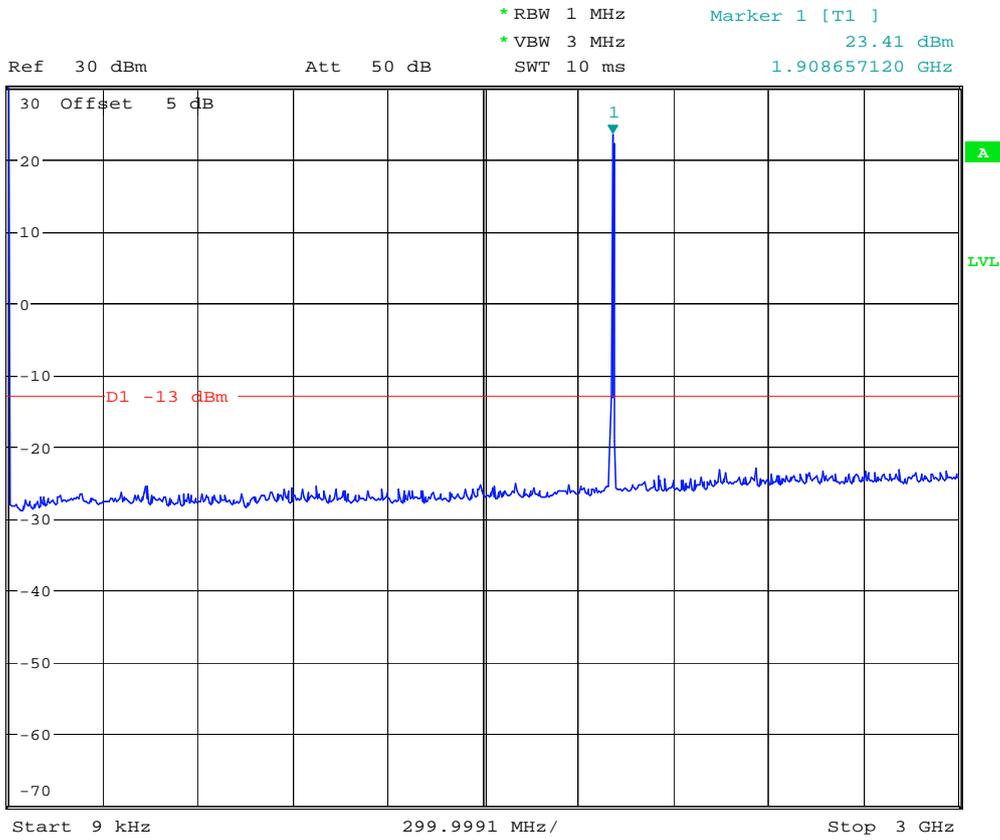

Date: 16.APR.2007 14:36:09




\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -21.24 dBm  
SWT 60 ms      9.500000000 GHz

Ref 30 dBm

Att 50 dB

1 PR  
MAXH

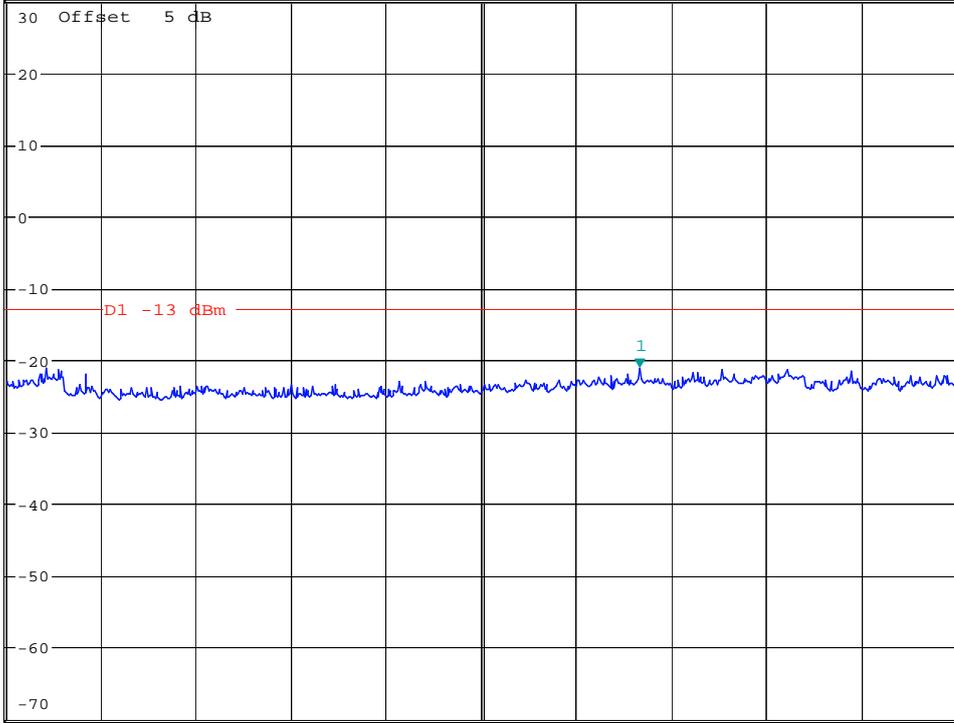

Start 3 GHz

975 MHz/

Stop 12.75 GHz


Date: 16.APR.2007 14:38:14



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -20.83 dBm  
SWT 45 ms      17.897035256 GHz

Ref 30 dBm

Att 50 dB

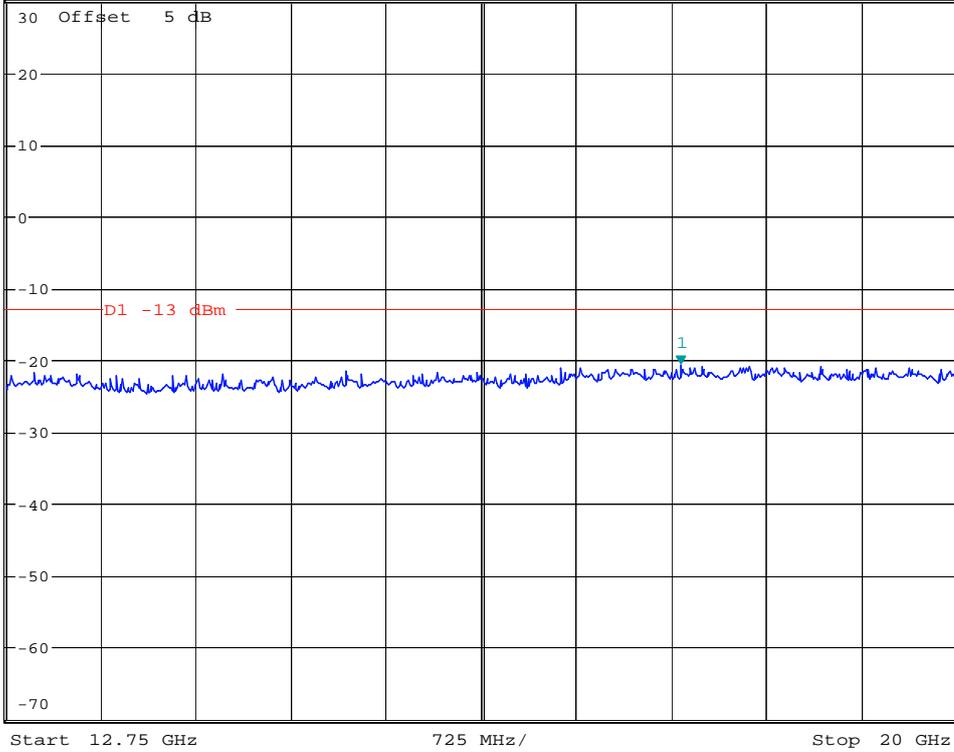

Date: 16.APR.2007 14:41:02


## Appendix E

# Radiated Spurious Emission


According to FCC Part 2.1053 & 24.238

# 1、GPRS1900


## Traffic Mode (9kHz-30MHz)

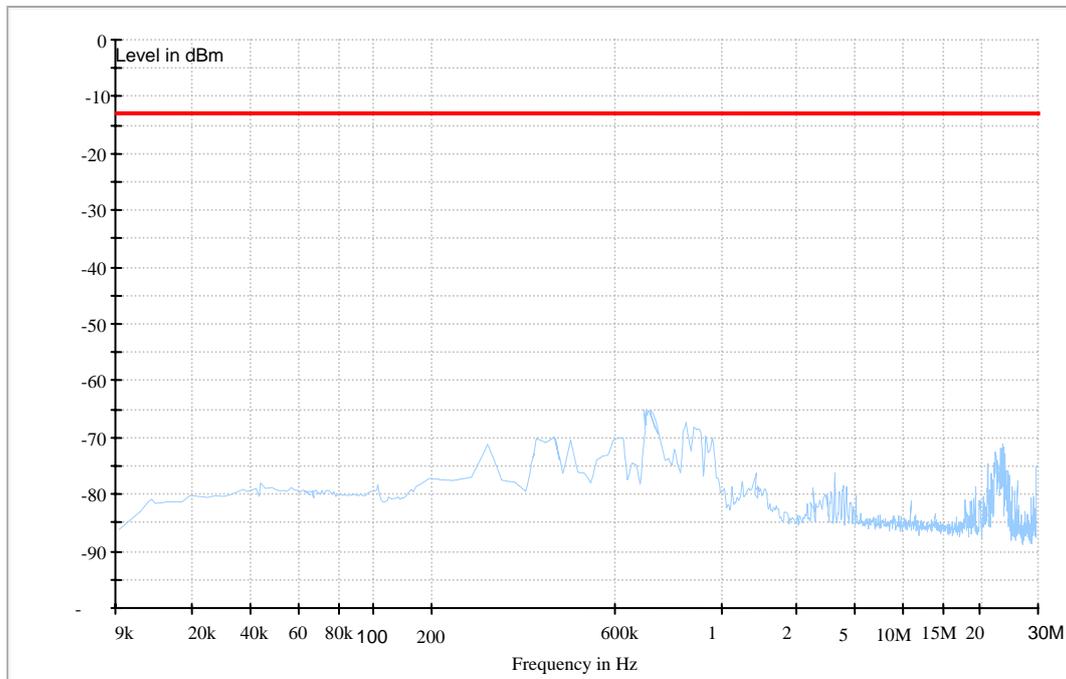


### Traffic Mode (30MHz-2GHz)

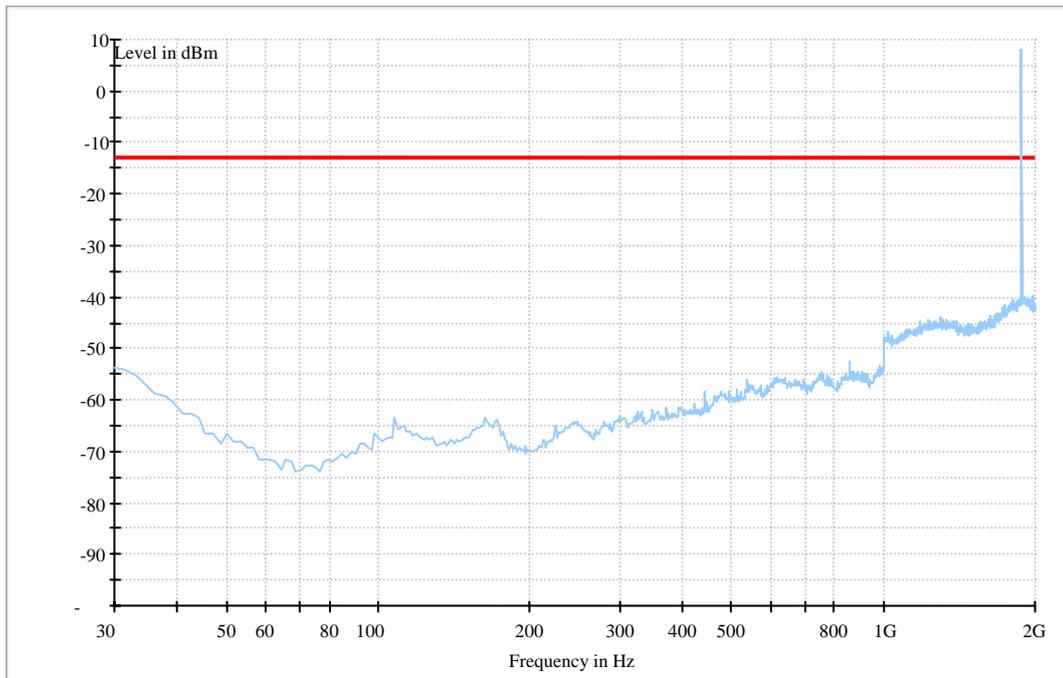


### Traffic Mode (2GHz-18GHz)

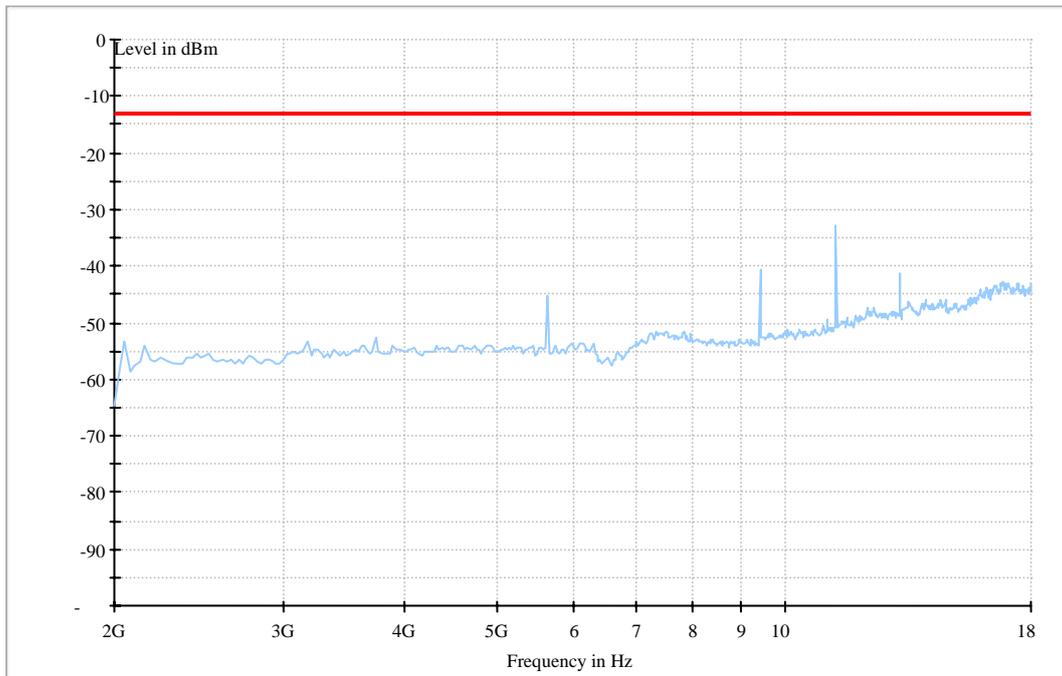


### Traffic Mode (18GHz-26.5GHz)

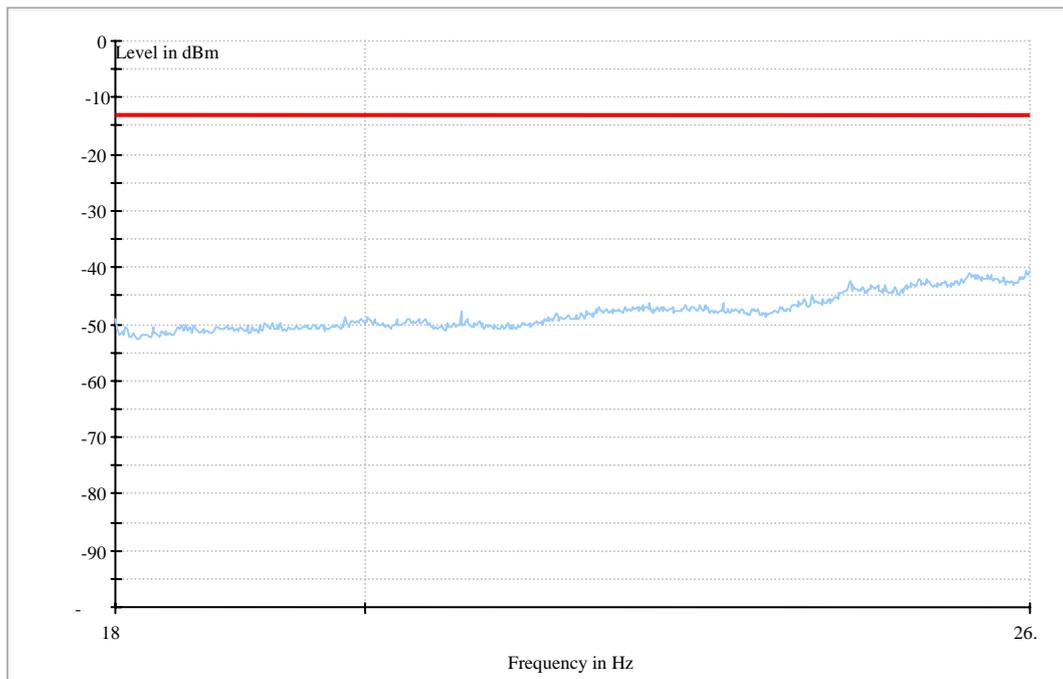


## 2、EGPRS1900 Traffic Mode (9kHz-30MHz)

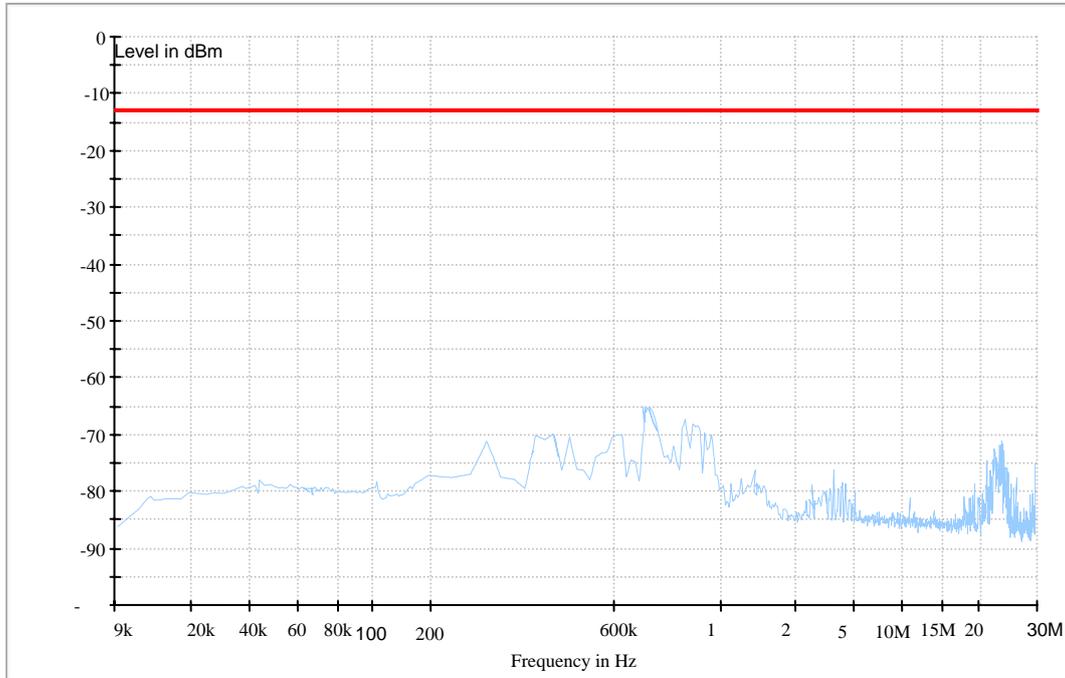


### Traffic Mode (30MHz-2GHz)

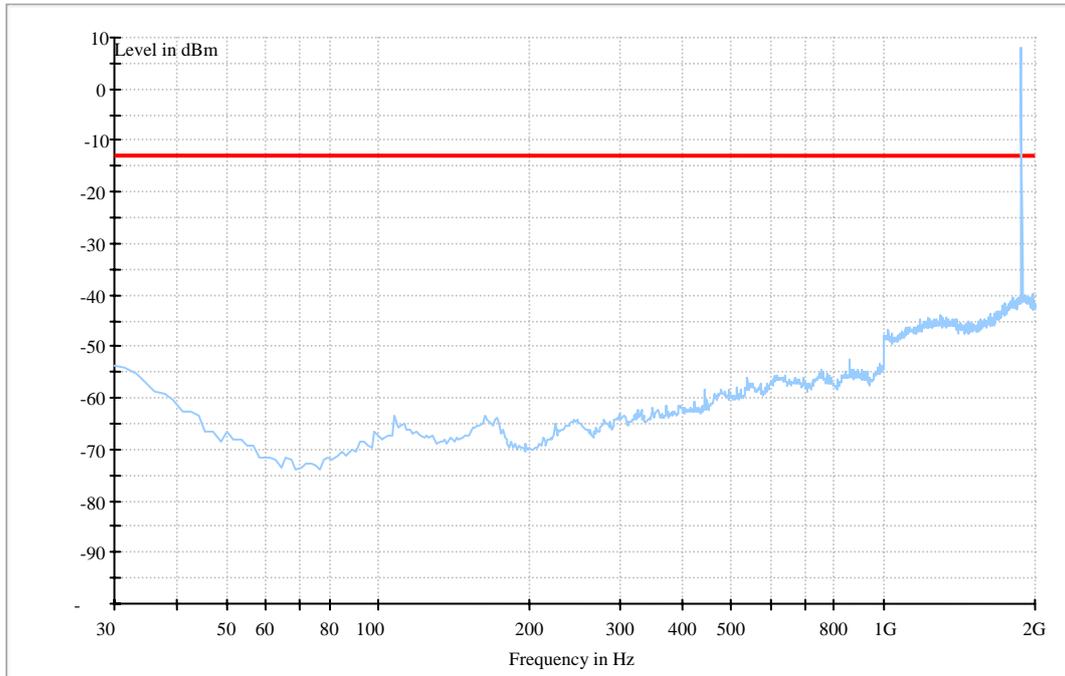


### Traffic Mode (2GHz-18GHz)

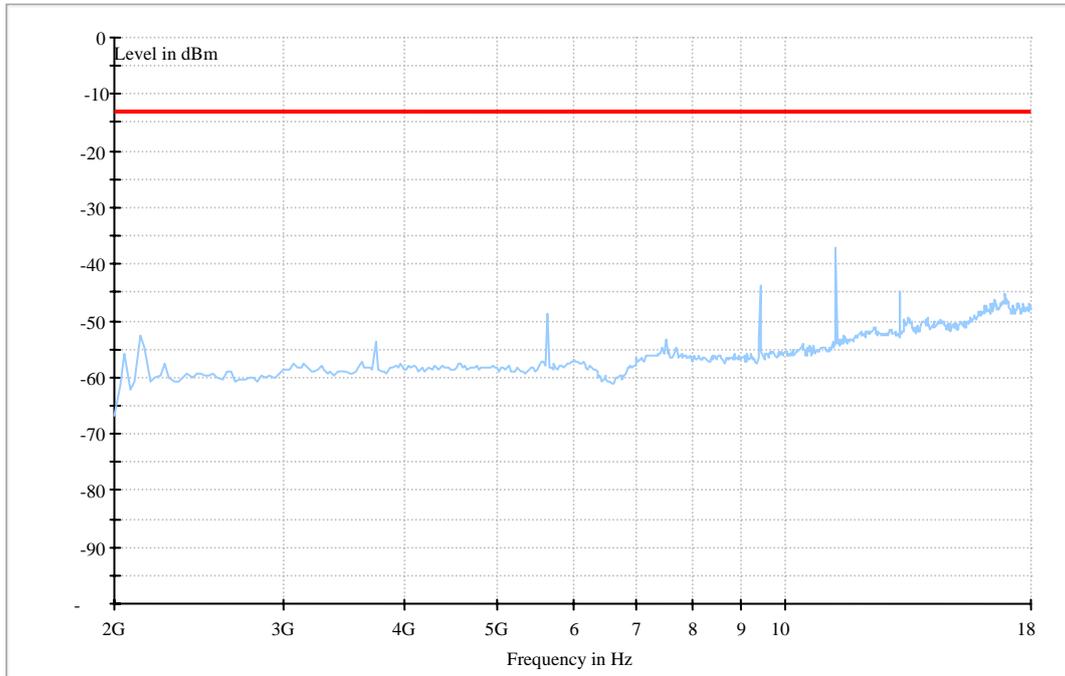


### Traffic Mode (18GHz-26.5GHz)

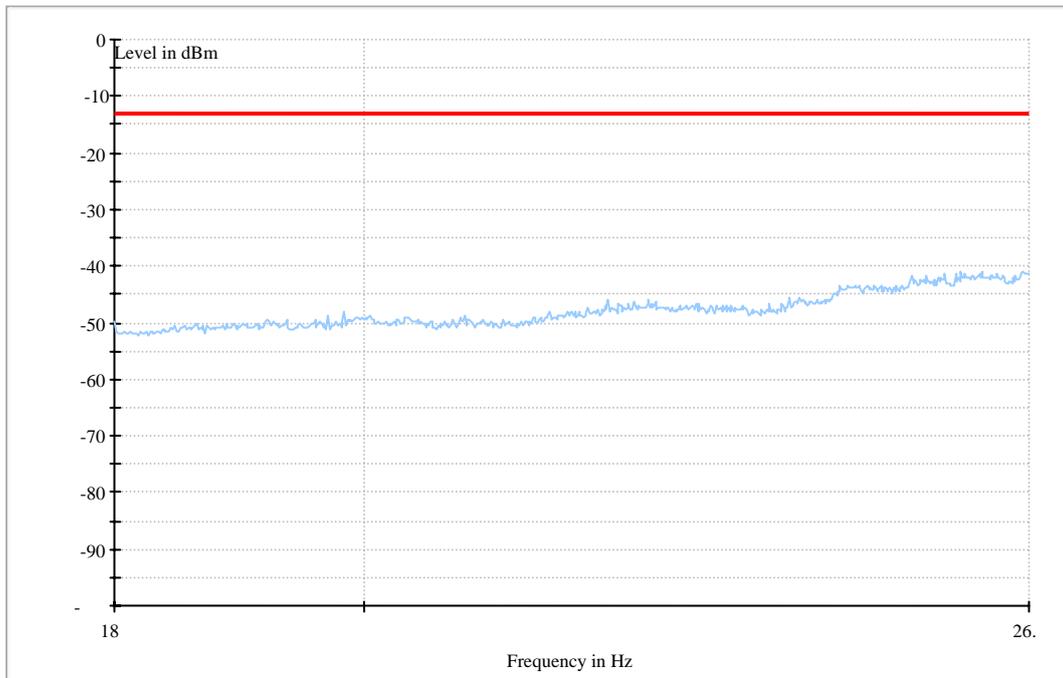


### 3、WCDMA1900 Traffic Mode (9kHz-30MHz)

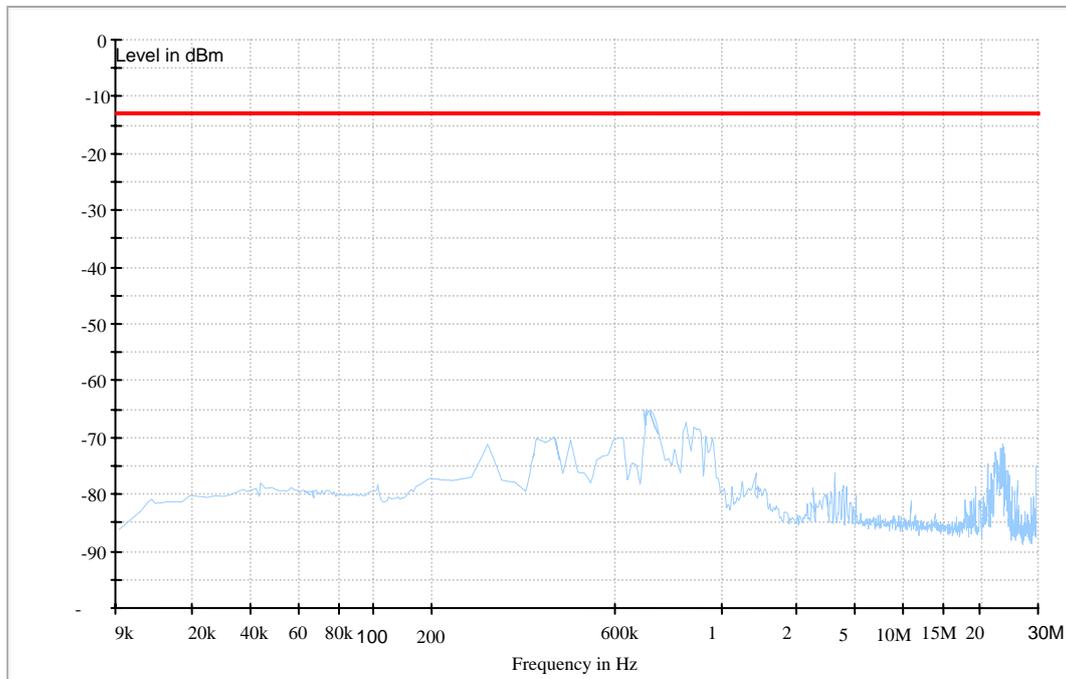

### Traffic Mode (30MHz-2GHz)

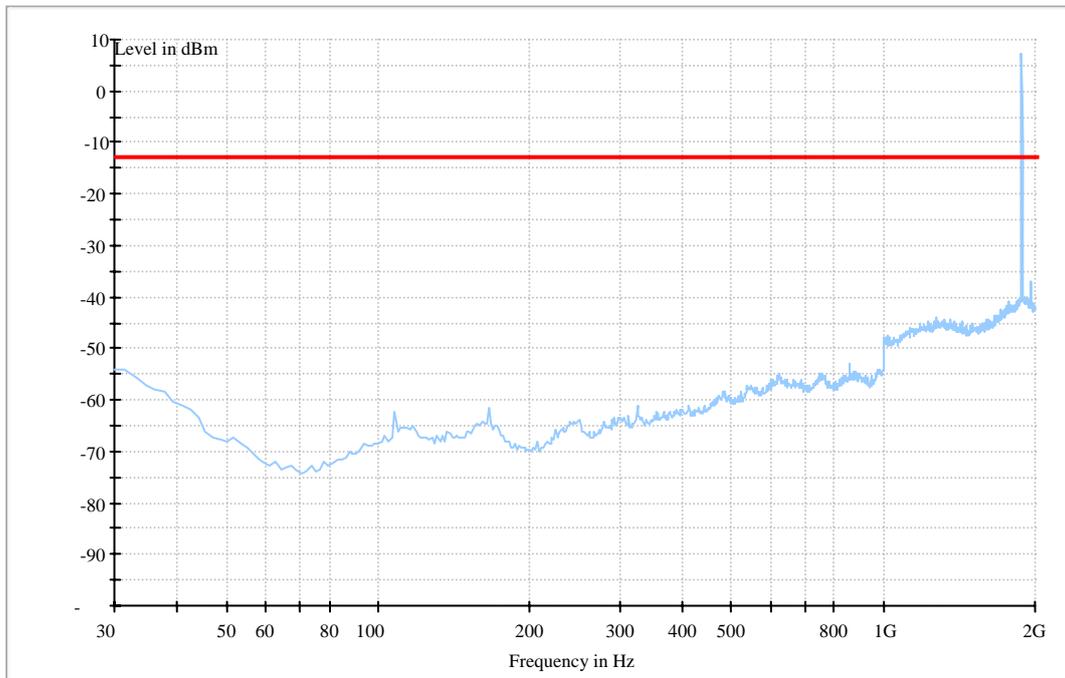

### Traffic Mode (2GHz-18GHz)

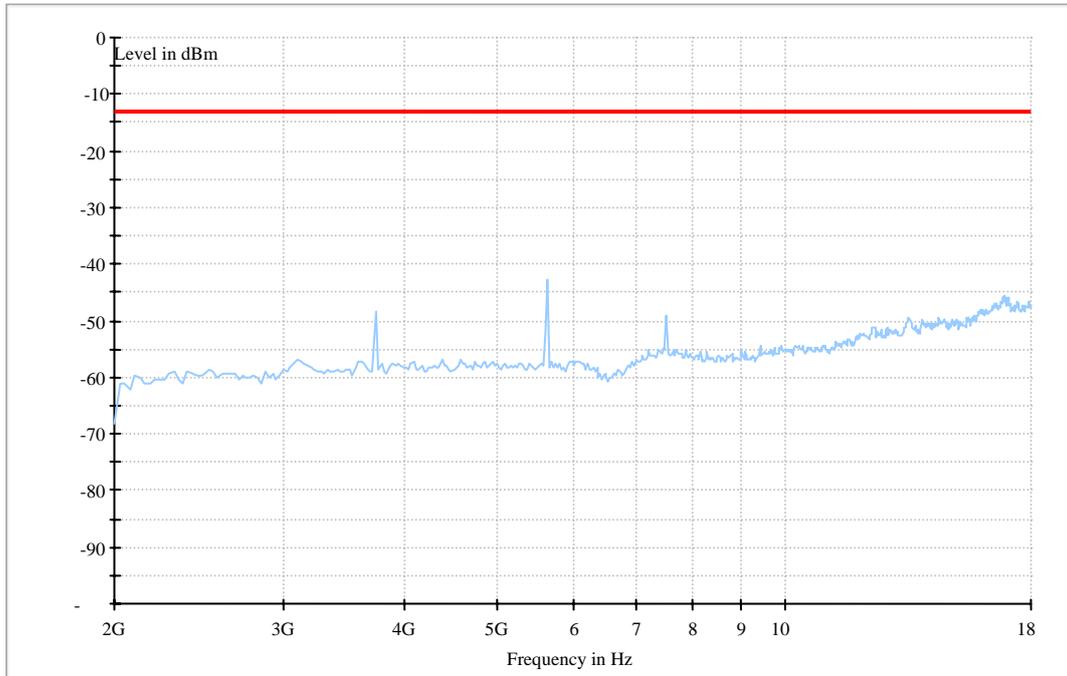

### Traffic Mode (18GHz-26.5GHz)

