



Report No: SYBH(R) 60072007EB-1  
FCC ID: QISE272

**FCC TEST REPORT OF  
Huawei E272 Vodafone Mobile  
Connect USB Modem**

**M/N: E272**

**Aug. 10, 2007**

**Reliability Laboratory of Huawei Technologies Co., Ltd.**

**All Right Reserved**

# Notice

1.	The laboratory has obtained the accreditation of China National Accreditation Committee for Laboratories (CNAL), and accreditation number: L0310.
2.	The laboratory has obtained the accreditation of THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION (A2LA), and Accreditation Council Certificate Number: 2174.01.
3.	The laboratory has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements. The site recognition number is 97456.
4.	The laboratory also has been listed by the VCCI to perform EMC measurements. The accreditation number is C2583, R2364, and T256.
5.	The test report is invalid if not marked with "exclusive stamp for the test report".
6.	Any copy of the test report is invalid if not re-marked with the "exclusive stamp for the test report".
7.	The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
8.	The test report is invalid if there is any evidence of erasure and/or falsification.
9.	If there is any dissidence for the test report, please file objection to the test centre within 15 days from the date of receiving the test report.
10.	Normally, the test report is only responsible for the samples that have undergone the test.
11.	Context of the test report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of the laboratory.



**REPORT ON  
Modem**

**FCC Test of Huawei E272 Vodafone Mobile Connect USB**

**M/N: Huawei E272**

**Report No: SYBH(R) 60072007EB-1**

**REGULATION**

**FCC CFR47 Part 2: Subpart J;**

**FCC CFR47 Part 22: Subpart H;**

**FCC CFR47 Part 15: Subpart B;**

**CONCLUSION**

There are 8 items need to be tested, 8 items have been tested. The sample of the model completely meets the requirements.

**Final Judgement: Pass**



**General Manager**

2007.08.10

Guo Xiaoqi

Date

Name

signature

**Technical Responsibility  
For Area of Testing**

2007.08.09

Zhang Xinghai

Date

Name

signature

A handwritten signature in black ink that reads "Zhang Xinghai".

**Test Lab Engineer**

2007.08.08

Hu Jun

A handwritten signature in black ink that reads "Hu Jun".

# Contents

<b>1</b>	<b><u>Summary</u></b> .....	<b>5</b>
<b>2</b>	<b><u>Product Description</u></b> .....	<b>6</b>
2.1	PRODUCTION INFORMATION .....	6
2.2	MODIFICATION INFORMATION .....	6
<b>3</b>	<b><u>Test Site Description</u></b> .....	<b>7</b>
3.1	TESTING PERIOD .....	7
3.2	GENERAL SET UP DESCRIPTION .....	7
<b>4</b>	<b><u>Product Description</u></b> .....	<b>8</b>
4.1	TECHNICAL CHARACTERISTICS.....	8
4.2	EUT IDENTIFICATION LIST.....	10
<b>5</b>	<b><u>Main Test Instruments</u></b> .....	<b>11</b>
<b>6</b>	<b><u>Transmitter Measurements</u></b> .....	<b>12</b>
6.1	EFFECTIVE RADIATED POWER OF TRANSMITTER (ERP).....	12
6.2	CONDUCTED POWER OF TRANSMITTER .....	16
6.3	MODULATION CHARACTERISTICS.....	18
6.4	OCCUPIED BANDWIDTH.....	20
6.5	BAND EDGES COMPLIANCE .....	23
6.6	SPURIOUS EMISSION AT ANTENNA TERMINAL.....	25
6.7	RADIATED SPURIOUS EMISSION .....	27
6.8	FREQUENCY STABILITY .....	31
<b>7</b>	<b><u>EMC Test</u></b> .....	<b>37</b>
7.1	CONDUCTED EMISSION AT POWER PORT.....	37
7.2	RADIATED EMISSION OF ENCLOSURE IN IDLE MODE .....	39
<b>8</b>	<b><u>System Measurement Uncertainty</u></b> .....	<b>41</b>
<b>9</b>	<b><u>Appendixes</u></b> .....	<b>42</b>

# 1 Summary

The table below summarizes the measurements and results for the Huawei E272 Vodafone Mobile Connect USB Modem. Detailed results and descriptions are shown in the following pages.

Table 1 Summary of results

<b>FCC Measurement Specification</b>	<b>FCC Limits Part(s)</b>	<b>Description</b>	<b>Result</b>
2.1046	22.913	Effective Radiated Power of Transmitter	PASS
2.1046	22.913	Conducted Power of Transmitter	PASS
2.1047		Modulation Characteristics	PASS
2.1049		Occupied Bandwidth	PASS
2.1051	22.917	Band Edges compliance	PASS
2.1051	22.917	Spurious Emission at Antenna Terminal	PASS
2.1053	22.917	Radiated Spurious Emission	PASS
2.1055	22.355	Frequency Stability	PASS
-	15.107	Conducted Emission at Power Port	PASS
-	15.109	Radiated Emission of Enclosure in Idle Mode	PASS

## 2 Product Description

### 2.1 Production Information

#### 2.1.1 General Description

Huawei E272 Vodafone Mobile Connect USB Modem is subscriber equipment in the GSM system. The frequency band is 850M. The E272 implements such functions as RF signal receiving / Transmitting, HSDPA/UMTS/EDGE/GPRS/GSM protocol processing and data service etc. Externally it provides USB interface (to connect to the notebook etc.), USIM card interface and antenna interface. It has two internal antennas as default. E272 uses Qualcomm MSM7200 chipset and Zero-IF technologies.

#### 2.1.2 Support function and Service

The Huawei E272 Vodafone Mobile Connect USB Modem support the function and service as follows:

Table 2 Service and Test mode List

Service Name	Characteristic	Corresponding Test Mode	Note
Data	Modulation: GMSK	TM1	GPRS/GSM
Data	Modulation: 8PSK	TM2	EDGE
Data	Modulation: QPSK	TM3	HSDPA/WCDMA

Note: \* The specified GPRS test conditions & settings are defined in 3GPP TS51.010 V5.4.0 and the EDGE test conditions & settings are defined in 3GPP TS51.010 V5.4.0.

## 2.2 Modification Information

For original equipment, following table is not application.

Table 3 Modification Information

Model Number	Board/Module	Original Version	New Version	Modify Information
Not applicable				

### **3 Test Site Description**

The test site of:

***Huawei Technologies Co. Ltd.  
P.O. Box 518129  
Huawei base, bantian,  
Longgang District, Shenzhen, China***

The test site description has been submitted to  and registration granted under the registration number **97456** on April 20, 2006. The test site has been accredited by  and the accredited number is **2174.01** in Jan of 2006.

#### **3.1 Testing Period**

The test have been performed during the period of

**Jul. 18, 2007 –Aug. 10, 2007**

#### **3.2 General Set up Description**

Huawei E272 Vodafone Mobile Connect USB Modem can support GPRS/EDGE mode and 850M Band. During this measurement, the Huawei E272 Vodafone Mobile Connect USB Modem just works in UMTS/GPRS/EDGE mode and 850M Band.

**TM1:** GPRS/GSM Mode with GMSK Modulation

**TM2:** EDGE Mode with 8PSK Modulation

**TM3:** UMTS/HSDPA Mode with QPSK Modulation

## 4 Product Description

### 4.1 Technical Characteristics

#### 4.1.1 Frequency Range

Table 4 Frequency Range

Uplink band:	824 to 849 MHz
Downlink band:	869 to 894 MHz

#### 4.1.2 Channel Spacing / Separation

Table 5 Channel Spacing / Separation

	EDGE/GPRS/GSM	UMTS/HSDPA
Channel spacing	200k Hz	200k Hz
Channel separation:	200k Hz	5M Hz

#### 4.1.3 Type of Emission

Table 6 Type of Emission

	EDGE/GPRS/GSM	UMTS/HSDPA
Emission Designation:	300kGXW	5M0F9W

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

#### 4.1.4 Environmental Requirements

Table 7 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%-95%RH

#### 4.1.5 Power Source

Table 8 Power Source

DC voltage nominal:	 +5V; Supplied by USB port of notebook
DC voltage range	 +4.75-5.25V
DC current maximal:	600mA

#### 4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (9).

Please reference the document Tune-up Procedure in TCF.

#### 4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8).

The voltage and current in the final RF stage is:

Table 9 Applied DC Voltages and Currents

Voltage:	 +2.85V
Current:	150mA According to CFR (FCC) part 2, subpart 2, section 2.1033(c) (8)

## 4.2 EUT Identification List

### 4.2.1 Board Information

Table 10 Board Information

850MHz Huawei E272 Vodafone Mobile Connect USB Modem		
E272		
Board and Module		
Equipment Designation / Description	Serial Number	Remarks
-MAINBOARD	EF1AA10721600023	TCPU Ver.A

### 4.2.2 Adapter Technical Data

No Applicable.

### 4.2.3 Battery Technical Data

No Applicable.

### 4.2.4 FCC Identification

**Grantee Code:** QIS  
**Product Code:** E272  
**FCC Identification:** QISE272

## 5 Main Test Instruments

Table 11 Main Test Equipments

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until (MM.DD.YYYY)
3m Semi Anechoic Chamber	S+M	N/A	N/A	12.25.2007
3m Full Anechoic Chamber	S+M	N/A	N/A	12.06.2007
Signal Analyzer	R&S	FSQ 26	100266	11.12.2007
Test Receiver Display Unit	R&S	ESMI 804.8932.52	829214/011	12.23.2007
Test Receiver RF Unit	R&S	ESMI 1032.5640.53	829550/008	11.21.2007
Receiver	R&S	ESIB 26	100318	10.18.2007
Receiver	R&S	ESCS30	830245/018	11.16.2007
Pre-Amplifier	Agilent	8447D	2944A10146	12.20.2007
Pre-Amplifier	Agilent	83017A	3950M00246	11.21.2007
Loop Antenna	Schwarzbeck	FMZB1516	1516115	12.09.2007
BiLog Antenna	Schaffner	CBL 6112B	2747	11.20.2007
BiLog Antenna	Schaffner	CBL 6112B	2536	12.23.2007
Horn Antenna	R&S	HF906 4044.4507.02	359287/005	12.08.2007
Horn Antenna	R&S	HF906 4044.4507.02	359287/006	12.06.2007
Horn Antenna	ETS-Lindgren	3117	00062533	11.15.2007
Horn Antenna	ETS-Lindgren	3117	00062549	12.16.2007
Horn Antenna	ETS-Lindgren	3116	00031541	11.17.2007
Dipole	Schwarzbeck	D69250-UHAP/D69250-VHAP	979/917	10.26.2007
Signal Generator	R&S	SMT06	830264/009	11.23.2007
Signal Generator	R&S	SMR 40	100325	12.15.2007
Artificial Mains Network	R&S	ENV4200	100001	09.29.2007
Power Supply	Keithley	2306	1045337	12.23.2007
Climate Chamber	WEISS	ACS-1	3604040034	11.25.2007
Universal Radio Communication Tester	R&S	CMU200	108035	12.25.2007
Wireless communication test set	Agilent	8960	GB43461081	12.06.2007

## 6 Transmitter Measurements

### 6.1 Effective Radiated Power of Transmitter (ERP)

#### 6.1.1 Test Conditions

Table 12 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25°C
Relative humidity:	55%
Test Configurations:	TM1/TM2/TM3 at frequency Bottom、Middle、Top

#### 6.1.2 Test Specifications and Limits

##### 6.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 22.913

##### 6.1.2.2 Supporting Standards

Table 13 Supporting Standards:

ANSI/TIA-603-C:2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

##### 6.1.2.3 Limits

Compliance with part 22.913, mobile/portable stations are limited to 7 watts ERP peak power.  
 $W(\text{dBm}) = 10 * \log(W_{\text{watts}})$ .

Table 14 Limits

Maximum Output Power (Watts)	< 7 Watts
Maximum Output Power (dBm)	< 38.5 dBm


#### 6.1.3 Test Method and Setup

- For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, ERP shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the Huawei E272 Vodafone Mobile Connect USB Modem to the wireless communication tester CMU200 via the air interface. The band set as 850M.
- Test the Radiated maximum output power by the CMU200 received from test antenna.
- Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on CMU200, and record the

power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

**Test setup**

**Step 1: Pre-test**

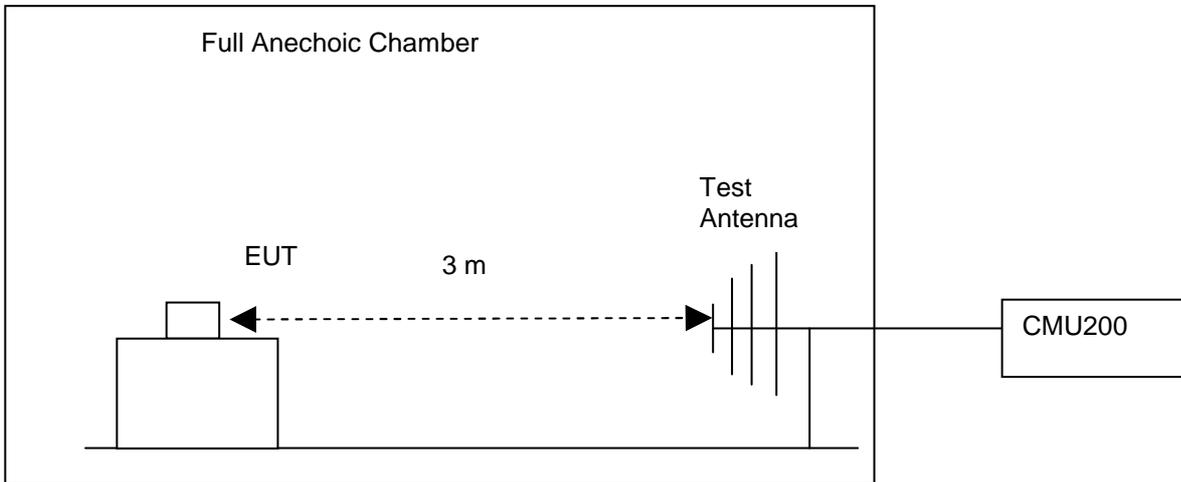

**Step 2: Substitution method to verify the maximum ERP**

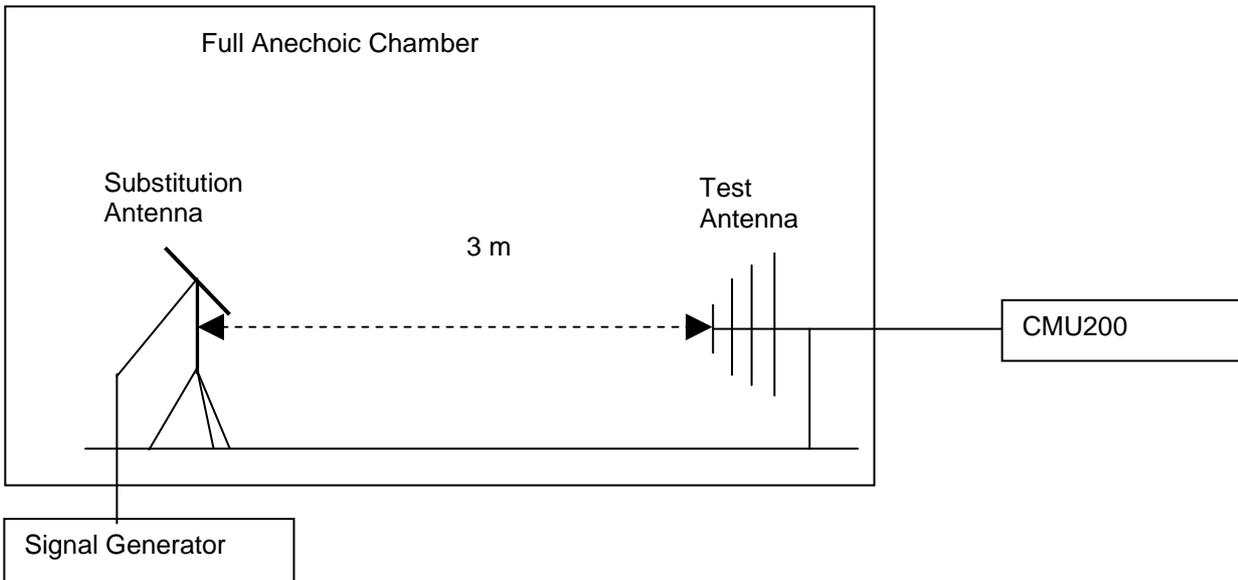


Figure 1. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

## 6.1.4 Measurement Results

### 6.1.4.1 Pre-test Results

Table 15 Measurement Results

TEST CONDITIONS		RF Output Power (ERP)					
		Channel128(B) 824.2MHz		Channel192 (M) 837MHz		Channel251(T) 848.8MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T <sub>nom</sub> (25 °C)	31.45	38.5	31.66	38.5	31.60	38.5
	V <sub>nom</sub> (5V)						
TM2	T <sub>nom</sub> (25 °C)	25.00	38.5	25.02	38.5	25.01	38.5
	V <sub>nom</sub> (5V)						
TEST CONDITIONS		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM3	T <sub>nom</sub> (25 °C)	21.91	38.5	22.02	38.5	21.96	38.5
	V <sub>nom</sub> (5V)						

### 6.1.4.2 Substitution Results

Table 16 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	SGP [dBm]	Substitution Gain [dBd]	Cable Loss [dB]	Substitution Level (ERP) [dBm]	Result
TM1	824.2	31.43	Dipole Ant.	34.99	-2.95	0.6	31.44	Pass
TM1	837	31.65	Dipole Ant.	35.32	-3.06	0.6	31.66	Pass
TM1	848.8	31.61	Dipole Ant.	35.33	-3.11	0.6	31.62	Pass
TM2	824.2	25.01	Dipole Ant.	28.57	-2.95	0.6	25.02	Pass
TM2	837	25.03	Dipole Ant.	28.67	-3.06	0.6	25.01	Pass
TM2	848.8	25.02	Dipole Ant.	28.75	-3.11	0.6	25.04	Pass
TM3	826.4	21.93	Dipole Ant.	25.5	-2.95	0.6	21.95	Pass
TM3	836.4	22.01	Dipole Ant.	25.68	-3.06	0.6	22.02	Pass
TM3	846.6	21.97	Dipole Ant.	25.64	-3.11	0.6	21.93	Pass

Note: a, For get the ERP (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$\text{ERP [dBm]} = \text{SGP [dBm]} - \text{Cable Loss [dB]} + \text{Gain [dBd]}$$

NOTE: SGP- Signal Generator Level

b, RBW=10kHz, VBW=300kHz, and integrated by the instrument to 200kHz for TM1 and TM2 and 5MHz for TM3.

### 6.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

## 6.2 Conducted Power of Transmitter

### 6.2.1 Test Conditions

Table 17 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom、 Middle、 Top

### 6.2.2 Test Specifications and Limits

#### 6.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

#### 6.2.2.2 Supporting Standards

Table 18 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.2.2.3 Limits

Compliance with part 22.913, in no any case may the peak power of a mobile station transmitter exceed 7 W. The calculated longitude ERP by following formula:

$$ERP(\text{dBm}) = 10 * \log(ERP_{\text{in watts}}).$$

And for conducted power, we can use Antenna Gain to calculate the limit. So the conducted power:

$$P_{\text{cod}}(\text{dBm}) = ERP(\text{dBm}) - \text{Gain}(\text{dBd}).$$

and  $\text{Gain}(\text{dBd}) = \text{Gain}(\text{dBi}) - 2.15\text{dB}$

Table 19 Limits

Maximum Output Power (Watts)	< 7 Watts
Antenna Gain(dBd):	<-1.15
Maximum Conducted Output Power (dBm)	< 39.65dBm

### 6.2.3 Test Method and Setup

(a)For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, Conducted maximum power shall be measured when the transmitter is adjusted in

accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the Huawei E272 Vodafone Mobile Connect USB Modem to the wireless communication tester CMU200 via the antenna connector. The band class is set as US Cellular.

(b) Test the Conducted maximum output power by the CMU200.

**Test setup**

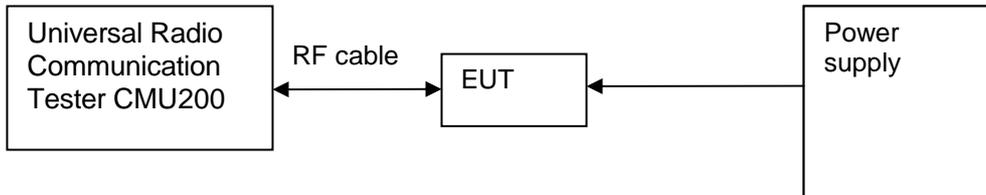


Figure 2. Test Set-up

**6.2.4 Measurement Results**

Table 20 Measurement Results

TEST CONDITIONS		RF Output Power (Conducted)					
		Channel128(B) 824.2MHz		Channel192 (M) 837MHz		Channel251(T) 848.8MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM1	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (5V)	32.79	39.65	33.01	39.65	32.95	39.65
TM2	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (5V)	26.17	39.65	26.24	39.65	26.18	39.65
TEST CONDITIONS		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233(T) 846.6MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
TM3	T <sub>nom</sub> (25 °C) V <sub>nom</sub> (5V)	23.08	39.65	23.17	39.65	23.13	39.65

**6.2.5 Conclusion**

The equipment **PASSED** the requirement of this clause.

### 6.3 Modulation Characteristics

#### 6.3.1 Test Conditions

Table 21 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3 at frequency Middle

#### 6.3.2 Test Specifications and Limits

##### 6.3.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22 subpart H

##### 6.3.2.2 Supporting Standards

Table 22 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

##### 6.3.2.3 Limits

No specific modulation characteristics requirement limits in part 2.1047 and part 22 subpart H.

Table 23 Limits

Limits	Not applicable
--------	----------------

#### 6.3.3 Test Method and Setup

Connect the Huawei E272 Vodafone Mobile Connect USB Modem to Universal Radio Communication Tester CMU200 via the antenna connector. The frequency band is set as 850M; the Huawei E272 Vodafone Mobile Connect USB Modem’s output is matched with 50 Ω loads, test method was according to 3GPP TS 51.010. The waveform quality and constellation of the Huawei E272 Vodafone Mobile Connect USB Modem was tested.

##### Test setup

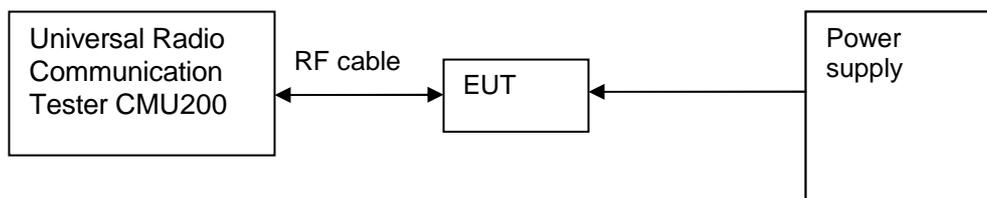


Figure 3. Test Set-up

### 6.3.4 Measurement Results

Table 24 Measurement Results

		Modulation Characteristic	
TEST CONDITIONS		Channel192(M) 837MHz	
		Measured	
		TM1	TM2
T <sub>nom</sub> (25 °C)	V <sub>nom</sub> (5V)	Refer to Appendix A	Refer to Appendix A
		Modulation Characteristic	
TEST CONDITIONS		Channel4182(M) 836.4MHz	
		Measured	
		TM3	
T <sub>nom</sub> (25 °C)	V <sub>nom</sub> (5V)	Refer to Appendix A	

### 6.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A.

## 6.4 Occupied Bandwidth

### 6.4.1 Test Conditions

Table 25 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %
Test Configurations:	GPRSMoDe、EDGEMoDe and UMTSMoDe at frequency Bottom、Top

### 6.4.2 Test Specifications and Limits

#### 6.4.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 22 subpart H.

#### 6.4.2.2 Supporting Standards

Table 26 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.4.2.3 Limits

No specific occupied bandwidth requirement in part 22 subpart H, but the occupied bandwidth was defined in part 2.1049: the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

Table 27 Limits

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

### 6.4.3 Test Method and Setup

Huawei E272 Vodafone Mobile Connect USB Modem was connected to the wireless signal analyzer R&S FSU26 via the one RF connector. The band class is set as 850M; Huawei E272 Vodafone Mobile Connect USB Modem was controlled to transmit maximum power. Measure and record the occupied bandwidth of the Huawei E272 Vodafone Mobile Connect USB Modem by the R&S FSU26.

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

Refer to 47CFR part2.1049 section (g)&(h).

(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the

services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer’s maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

For TM1/TM2 following RBW and VBW are employed:

**Measurement bandwidth (RBW): 3 kHz (Resolution bandwidth)**

**Video bandwidth (VBW): 10 kHz**

For TM3 system following RBW and VBW are employed:

**Measurement bandwidth (RBW): 50 kHz (Resolution bandwidth)**

**Video bandwidth (VBW): 500 kHz**

**Test Set-up**

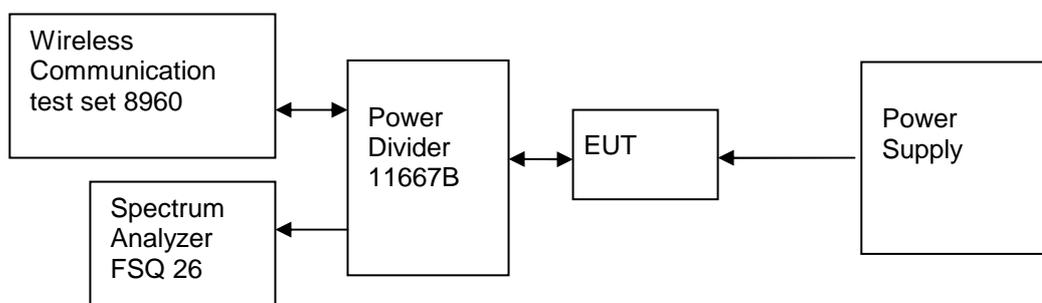


Figure 4. Test Set-up

**6.4.4 Measurement Results**

Table 28 Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel128 (B) 824.2MHz		Channel192 (M) 837MHz		Channel251 (T) 848.8MHz	
		Measured (kHz)		Measured (kHz)		Measured (kHz)	
		TM1	TM2	TM1	TM2	TM1	TM2
T <sub>nom</sub> (25 °C)	99%	243.59	233.97	246.79	246.79	243.59	240.38
V <sub>nom</sub> (5V)							
TEST CONDITIONS		Occupied Bandwidth					
		Channel4132(B) 826.4MHz		Channel4182(M) 836.4MHz		Channel4233 (T) 846.6MHz	
		Measured		Measured		Measured	

		(MHz)	(MHz)	(KHz)
		TM3	TM3	TM3
T <sub>nom</sub> (25 °C) V <sub>nom</sub> (5V)	99%	4.151	4.183	4.183

### 6.4.5 Conclusion

The equipment **PASSED** the requirement of this clause.  
For the measurement results refer to appendix B.

## 6.5 Band Edges Compliance

### 6.5.1 Test Conditions

Table 29 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	55 %
Test Configurations:	TM1/TM2/TM3 at frequency Bottom、 Top

### 6.5.2 Test Specifications and Limits

#### 6.5.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

#### 6.5.2.2 Supporting Standards

Table 30 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.5.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT).

Table 31 Limits

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$ , 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$ , 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$ ; 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

### 6.5.3 Test Method and Setup

Huawei E272 Vodafone Mobile Connect USB Modem was connected to the wireless signal analyzer R&S FSU26 via the one RF connector, the band class is set as 850M. Huawei E272 Vodafone Mobile Connect USB Modem was controlled to transmit maximum power. Measure and record band edges compliance of the Huawei E272 Vodafone Mobile Connect USB Modem by the R&S FSU26.

In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC part22.917.The FCC rules define the fundamental emission as -26dBc bandwidth. The limit is -13dBm.

**Test Set-up**

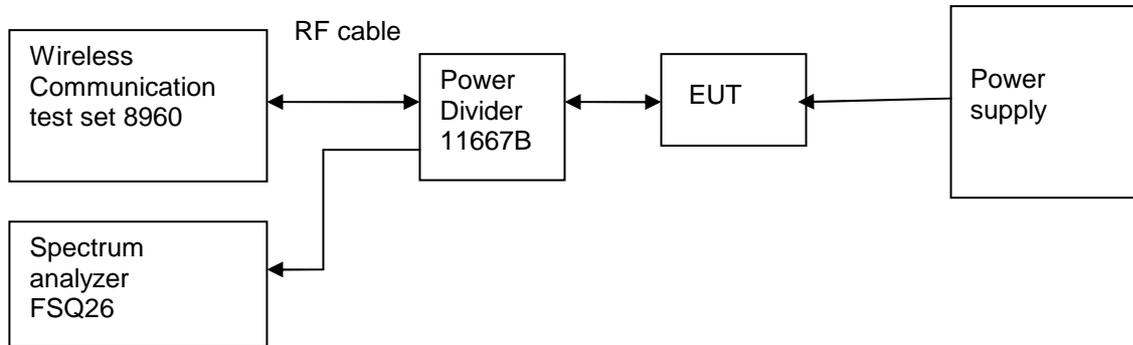


Figure 5. Test Set-up

**6.5.4 Measurement Results**

Table 32 Measurement Results outside Band Edges-- Single Carrier

Band	Frequency of Band edges [MHz]	Channel Number	Test Mode	Spurious Level measured [dBm]	FCC limit	Result
$T_{nom} (25\text{ }^{\circ}\text{C}), V_{nom} (5\text{V})$						
Cellular	824.2	128	TM1	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM1	<-13(See appendix C)	- 13 dBm	Pass
	824.2	128	TM2	<-13(See appendix C)	- 13 dBm	Pass
	848.8	251	TM2	<-13(See appendix C)	- 13 dBm	Pass
	826.4	4132	TM3	<-13(See appendix C)	- 13 dBm	Pass
	846.6	4233	TM3	<-13(See appendix C)	- 13 dBm	Pass

**6.5.5 Conclusion**

The equipment **PASSED** the requirement of this clause. For the measurement results refer to appendix C.

## 6.6 Spurious Emission at Antenna Terminal

### 6.6.1 Test Conditions

Table 33 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	25°C
Relative humidity:	50 %
Test Configurations:	TM1/TM2/TM3 at frequency B、M、T

### 6.6.2 Test Specifications and Limits

#### 6.6.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917

#### 6.6.2.2 Supporting Standards

Table 34 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0:2005	Recommended GSM/EDGE MS conformance specification

#### 6.6.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT).

Table 35 Limits

	TM1	TM2	TM3
Rated Power:	33dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$ , 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$ , 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$ ; 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

### 6.6.3 Test Method and Setup

Huawei E272 Vodafone Mobile Connect USB Modem was connected to the wireless signal analyzer R&S FSU26 via the one RF connector, the band class is set as 850M. Huawei E272 Vodafone Mobile Connect USB Modem was controlled to transmit maximum power. Measure and record the Conducted Spurious Emission of the Huawei E272 Vodafone Mobile Connect USB Modem by the R&S FSU26.

According to part 22.917, the defined measurement bandwidth as following:

22.917 (b) Measurement procedure: Compliance with these provisions is based on the use of

measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 100 kHz: 1 kHz;  
 Measurement bandwidth (RBW) for 100 kHz up to 30 MHz: 10 kHz;  
 Measurement bandwidth (RBW) for 30 MHz up to 1 GHz: 100 kHz;  
 Measurement bandwidth (RBW) for 1GHz up to 20GHz: 1 MHz;

**Test Set-up**

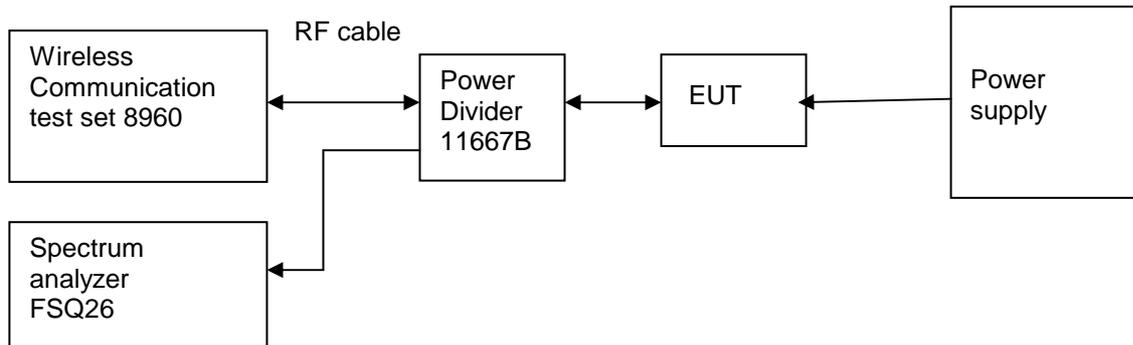


Figure 6. Test Set-up

**6.6.4 Measurement Results**

Table 36 Measurement Results

Channel Number	Test Mode	Test Range (Frequency)	Output Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
Channel 128(B)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4132(B)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 251(T)	TM1	9 kHz ~12.75GHz	33	<- 13 dBm (See appendix D)	- 13 dBm	Pass
	TM2	9 kHz ~12.75GHz	27	<- 13 dBm (See appendix D)	- 13 dBm	Pass
Channel 4233(T)	TM3	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

**6.6.5 Conclusion**

The equipment **PASSED** the requirement of this clause.  
 For the measurement results refer to appendix D.

## 6.7 Radiated Spurious Emission

### 6.7.1 Test Conditions

Table 37 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25 °C
Relative humidity:	53 %
Test Configurations:	TM1/TM2/TM3 at frequency M

### 6.7.2 Test Specifications and Limits

#### 6.7.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 22.917

#### 6.7.2.2 Supporting Standards

Table 38 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.7.2.3 Limits

Compliance with part 22.917, all spurious emission must be attenuated below the transmitter power by at least  $43 + 10 \log_{10} P$ . (Whereas P is the rated power of the EUT).

Table 39 Limits for GPRS Mode

	TM1	TM2	TM3
Rated Power:	33 dBm	27 dBm	24 dBm
Required attenuation:	$43 + 10 \log(2) = 46$ , 33 dBm - 46 dB	$43 + 10 \log(0.5) = 40$ , 27 dBm - 40 dB	$43 + 10 \log(0.25) = 37$ , 24 dBm - 37 dB
Absolute level	- 13 dBm	- 13 dBm	- 13 dBm

### 6.7.3 Test Method and Setup

(a) Measurements were made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.1049(c) as appropriate. For equipment operating on frequencies below 890 MHz, an Open Field Test is normally required with the measuring instrument antenna located in the far field at all test frequencies. In the event it is either

impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections, which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

- (b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:
- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
  - (2) All equipment operating on frequencies higher than 25 MHz
  - (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
  - (4) Other types of equipment as required, when deemed necessary by the Commission.

Huawei E272 Vodafone Mobile Connect USB Modem is equipment with non-integral antenna. And it should test according to part (b) of above section.

BTS simulator is connected to a communication antenna, by which communicate with the Huawei E272 Vodafone Mobile Connect USB Modem inside the test site. The BTS simulator controls the Huawei E272 Vodafone Mobile Connect USB Modem to transmit at maximum power which defined in specification of product when in traffic mode, field strength of spurious emission in idle mode were also tested. The Huawei E272 Vodafone Mobile Connect USB Modem operates on a typical channel.

### **The test procedure:**

- (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, EIRP. shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(8). Connect the Huawei E272 Vodafone Mobile Connect USB Modem to the BTS simulator via the air interface. The band class is set as 850M.
- (b) Test the Radiated maximum output power by the Rohde and Schwarz ESMI Test Receiver from test antenna.
- (c) Use substitution method to verify the maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on ESMI Test Receiver, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.


According to part 22.917, the defined measurement bandwidth as following:

22.917(b) Measurement procedure: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater.

Measurement bandwidth (RBW) for 9 kHz up to 12.75 GHz: 100 kHz;

### **Test setup**

#### **Step 1: Pre-test**

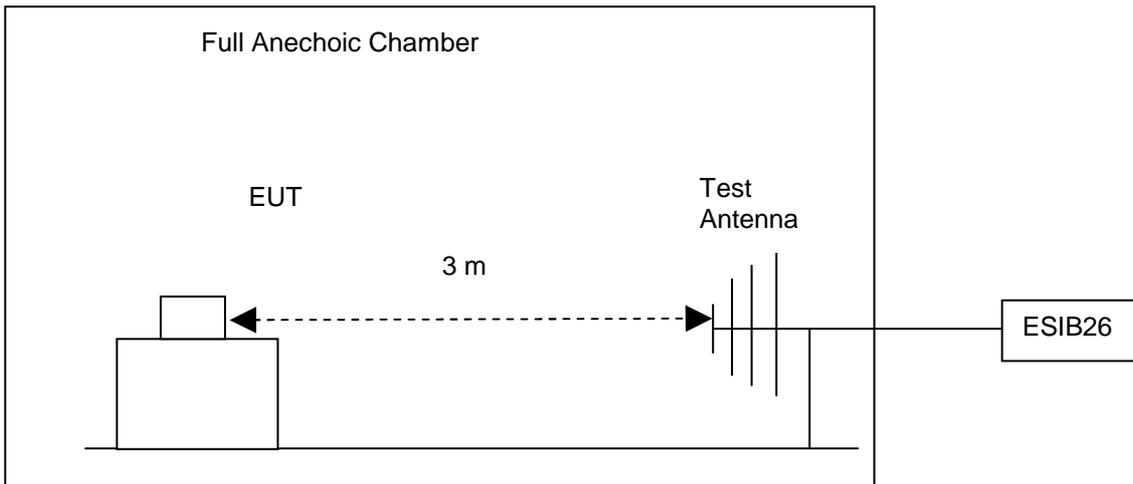

**Step 2: Substitution method to verify the maximum ERP**

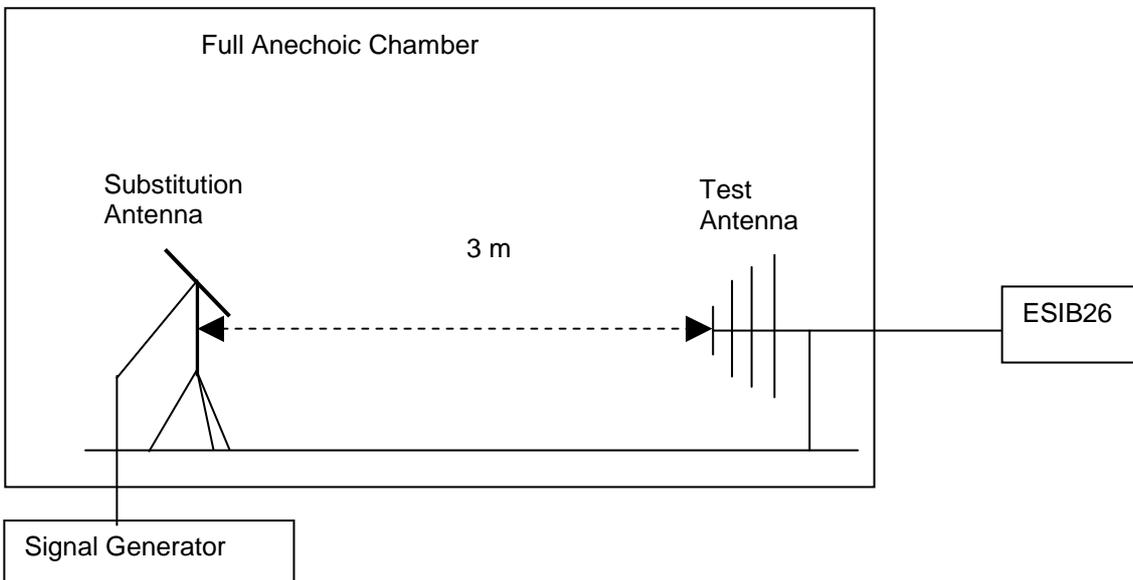


Figure 7. Test Set-up

NOTE: Effective radiated power (ERP) refers to the radiation power output of the EUT, assuming all emissions are radiated from half-wave dipole antennas.

**6.7.4 Measurement Results**

**6.7.4.1 Pre-test Measurement Results**

Table 40 Measurement Results

Channel Number	Mode	Test Range (Frequency)	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
192	TM1	9 kHz ~20GHz	30	<- 13 dBm (See appendix E)	- 13 dBm	Pass
192	TM2	9 kHz ~20GHz	26	<- 13 dBm (See appendix E)	- 13 dBm	Pass
4182	TM3	9 kHz ~20GHz	24	<- 13 dBm (See appendix E)	- 13 dBm	Pass

### 6.7.4.2 Substitution Results

No obvious peak found in pre- test. All frequency point's margin is bigger than 20dB.

Calculation Sample:

Table 41 Substitution Results

Test Mode	Freq. [MHz]	Meas. Level [dBm]	Substitution Antenna Type	Gain [dBd]	Cable Loss [dB]	Substitution Level [dBm]	FCC limit [dBm]	Result

Note: For get the EIRP. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$ERP [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$

NOTE: SGP- Signal Generator Level

### 6.7.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix E.

According to pre-test result, only the test data which the data card with the external antenna (the maximum radiated spurious emission condition) were given in appendix E.

## 6.8 Frequency Stability

### 6.8.1 Test Conditions

Table 42 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 % at 25 °C
Test Configurations:	TM1/TM2/TM3 at frequency M

### 6.8.2 Test Specifications and Limits

#### 6.8.2.1 Specification

CFR 47 (FCC) part 2.1055 and part 22.355

#### 6.8.2.2 Supporting Standards

Table 43 Supporting Standards:

ANSI/TIA-603-C: 2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP TS51.010 V5.4.0:2005	Digital cellular telecommunications system Mobile Station (MS) conformance specification;

#### 6.8.2.3 Limits

According to part 22.355, from 821MHz to 896MHz, for mobile device, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm.

### 6.8.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30 °to +50 °centigrade for all equipment except that specified in subparagraphs (2) and (3) of paragraph 2.1055

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10° centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal

supply voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

**Test Set up**

Connect the Huawei E272 Vodafone Mobile Connect USB Modem to the Wireless Communication test set 8960 via the connector. Then measure the frequency error by the Wireless Communication test set 8960. The Huawei E272 Vodafone Mobile Connect USB Modem’s output is matched with a 50 Ω load.

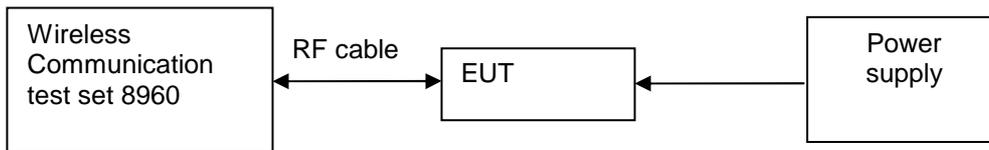


Figure 8. Test Set up

**6.8.4 Measurement Results**

**6.8.4.1 Measurement Results vs. Variation of Temperature**

- **TM1, 5V DC Channel No.192(837.0MHz)**

Table 44 Measurement Results vs. Variation of Temperature—GPRS Mode

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 ℃	33	837.0	-20.25	Pass
-20 ℃	33	837.0	-18.65	Pass
-10 ℃	33	837.0	14.28	Pass
0 ℃	33	837.0	16.39	Pass
+10 ℃	33	837.0	25.33	Pass
+20 ℃	33	837.0	27.86	Pass
+30 ℃	33	837.0	23.54	Pass
+40 ℃	33	837.0	22.35	Pass
+50 ℃	33	837.0	18.67	Pass

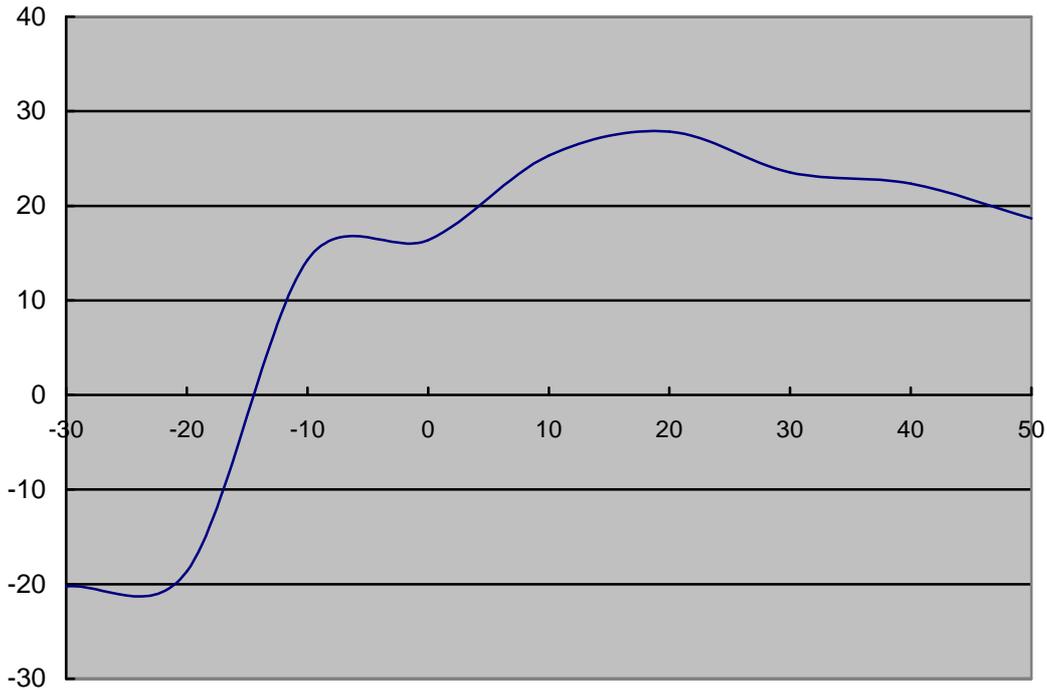


Figure 9.GPRS Mode Test Graph

● **TM2, 5V DC Channel No.192(837.0MHz)**

Table 45 Measurement Results vs. Variation of Temperature—EDGE Mode

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 °C	27	837.0	-21.18	Pass
-20 °C	27	837.0	-21.45	Pass
-10 °C	27	837.0	22.35	Pass
0 °C	27	837.0	12.17	Pass
+10 °C	27	837.0	-11.24	Pass
+20 °C	27	837.0	-10.89	Pass
+30 °C	27	837.0	23.56	Pass
+40 °C	27	837.0	19.24	Pass
+50 °C	27	837.0	20.31	Pass

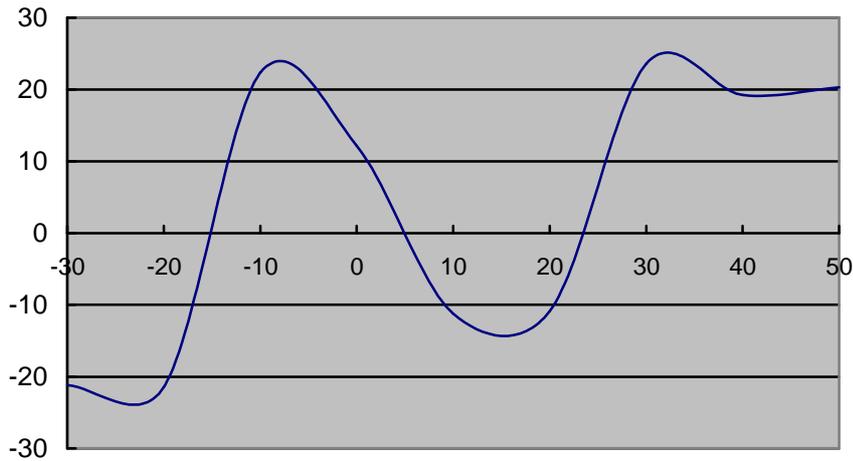


Figure 10. EDGE Mode Test Graph

● **TM3, 5V DC Channel No.4182(836.4MHz)**

Table 46 Measurement Results vs. Variation of Temperature—UMTS Mode

Temperature	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
-30 ℃	24	836.4	20.59	Pass
-20 ℃	24	836.4	15.62	Pass
-10 ℃	24	836.4	19.56	Pass
0 ℃	24	836.4	11.18	Pass
+10 ℃	24	836.4	15.78	Pass
+20 ℃	24	836.4	23.56	Pass
+30 ℃	24	836.4	-15.23	Pass
+40 ℃	24	836.4	-21.44	Pass
+50 ℃	24	836.4	-11.27	Pass

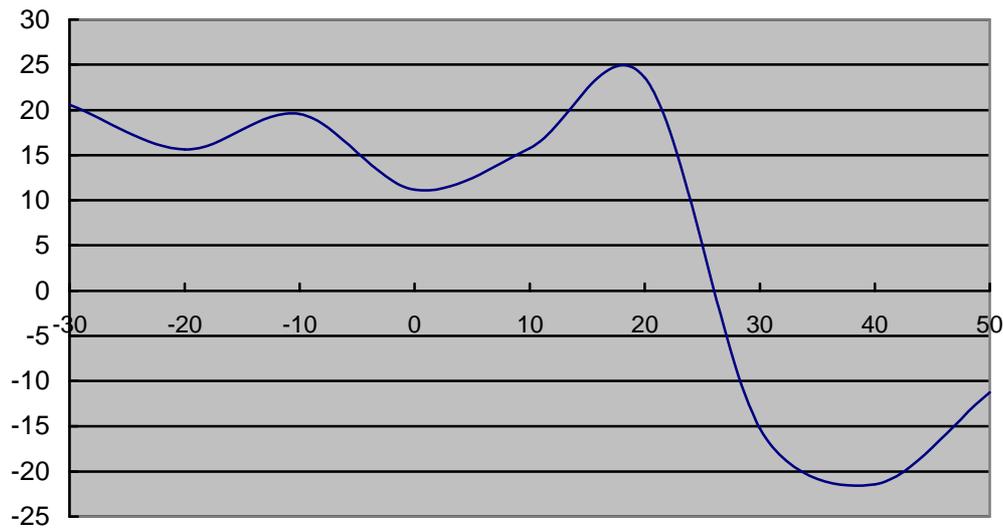


Figure 11. UMTS Mode Test Graph

**6.8.4.2 Measurement Results vs. Variation of Voltage**

- **TM1, 25 °C ,Channel No. 192(837.0MHz)**

Table 47 Measurement Results vs. Variation of Voltage—GPRS Mode

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
4.75	33	837.0	15.23	Pass
5.0	33	837.0	21.15	Pass
5.25	33	837.0	-11.62	Pass

- **TM2, 25 °C ,Channel No. 192(837.0MHz)**

Table 48 Measurement Results vs. Variation of Voltage—EDGE Mode

Voltage	Power (dBm)	Nominal Frequency (MHz)	Measured Frequency Error(Hz)	Result
4.75	27	837.0	-15.60	Pass
5.0	27	837.0	18.21	Pass
5.25	27	837.0	15.15	Pass

- **TM3, 25 °C ,Channel No. 4182(836.4MHz)**

Table 49 Measurement Results vs. Variation of Voltage—EDGE Mode

Voltage	Power (dBm)	Nominal Frequency	Measured Frequency Error(Hz)	Result
---------	-------------	-------------------	------------------------------	--------

---

		(MHz)		
4.75	24	836.4	22.25	Pass
5.0	24	836.4	15.30	Pass
5.25	24	836.4	14.16	Pass

### 6.8.5 Conclusion

The equipment **PASSED** the requirement of this clause.

## 7 EMC Test

### 7.1 Conducted Emission at Power Port

#### 7.1.1 Test Conditions

Table 50 Test Conditions

Preconditioning:	0.5 hour
Measured at:	Power port
Ambient temperature:	23.5°C
Relative humidity:	55 %
Test Configurations:	TM1 at frequency M

#### 7.1.2 Test Specifications and Limits

##### 7.1.2.1 Specification

CFR 47 (FCC) part 15.107

##### 7.1.2.2 Supporting Standards

Table 51 Supporting Standards:

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
------------------	--

##### 7.1.2.3 Limits

Compliance with part15.107, conducted emission must meet the requirement of following table.

Table 52 Limits

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

Note: \* Decreases with the logarithm of the frequency.

##### 7.1.3 Test Method and Setup

The Table-top EUT was placed upon a non-metallic table 0.8 m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4: 2003.

Conducted Disturbance at AC Port measurements were undertaken on the L and N Lines. The emissions were measured using a Quasi-Peak Detector and Average Detector.

Huawei Wireless Gateway was communicated with the BTS simulator through Air interface, the BTS

simulator controls the Wireless Gateway to transmitter the maximum power which defined in specification of product. The Wireless Gateway operated on the typical channel.

Measurement bandwidth (RBW) for 150 kHz to 30 MHz: 9 kHz;

### Test Set-up

The Wireless Gateway was setup in the screened chamber and operated under nominal conditions.

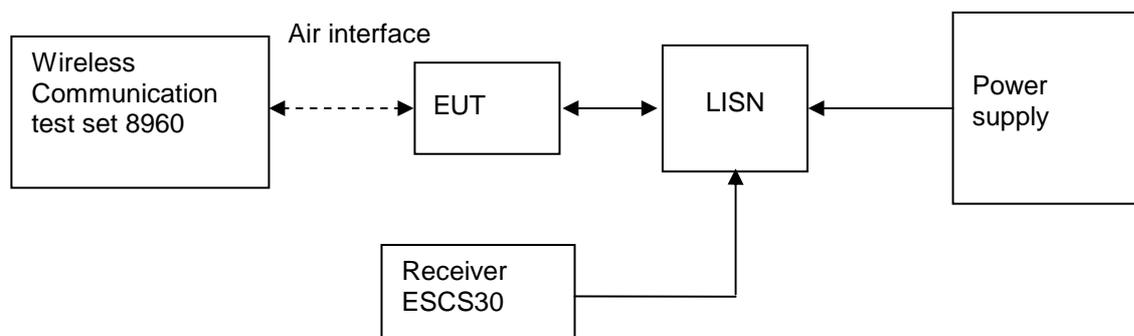


Figure 12. Test Set-up

### 7.1.4 Measurement Results

Table 53 MEASUREMENT RESULT:QP DECTECTOR

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.150000	52.00	11.0	66	14.0	QP	L3	GND
0.478500	40.20	10.0	56	16.2	QP	L3	GND
0.955500	35.00	9.9	56	21.0	QP	L3	GND
2.940000	32.30	10.0	56	23.7	QP	N	GND
7.345500	38.70	10.3	60	21.3	QP	N	GND
13.375500	36.30	11.6	60	23.7	QP	N	GND

Table 54 MEASUREMENT RESULT:AV DECTECTOR

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.348000	32.10	10.2	49	16.9	AV	L3	GND
0.802500	31.80	9.9	46	14.2	AV	L3	GND
1.846500	32.50	10.1	46	13.5	AV	L3	GND
3.354000	31.50	10.1	46	14.5	AV	N	GND
11.445000	29.70	11.7	50	20.3	AV	N	GND
13.474500	35.50	11.6	50	14.5	AV	N	GND

### 7.1.5 Conclusion

The equipment **PASSED** the requirement of this clause. For the measurement results refer to appendix F.

## 7.2 Radiated Emission of Enclosure in Idle Mode

### 7.2.1 Test Conditions

Table 55 Test Conditions

Preconditioning:	0.5 hour
Measured at:	enclosure
Ambient temperature:	25 °C
Relative humidity:	52 %
Test Configurations:	TM1/TM2/TM3 at frequency M

### 7.2.2 Test Specifications and Limits

#### 7.2.2.1 Specification

CFR 47 (FCC) part 15.109

#### 7.2.2.2 Supporting Standards

Table 56 Supporting Standards:

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
------------------	--

#### 7.2.2.3 Limits

The Radiated Emission of enclosure of EUT should compliance with the requirement of part 15.109. The limit showed in following table.

Table 57 Limits

Frequency of Emission (MHz)	Radiated Limit	
	Unit(uv/m)	Unit(dBuv/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
960-1000	500	54

### 7.2.3 Test Method and Setup

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The test distance was 3m. The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4. The Radiated Disturbance measurements were made using a Rohde and Schwarz ESMI Test Receiver and control software ES-K1.

A preliminary scan and a final scan of the emissions were made from 30 MHz to 1GHz by using test script of software; the emissions were measured using a Quasi-Peak Detector. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance

with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

Huawei E272 communicated with the BTS simulator through Air interface. The E272 operated on the typical channel and the E272 worked in idle mode, transmitter did not work in this test.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 kHz

**Test set up**

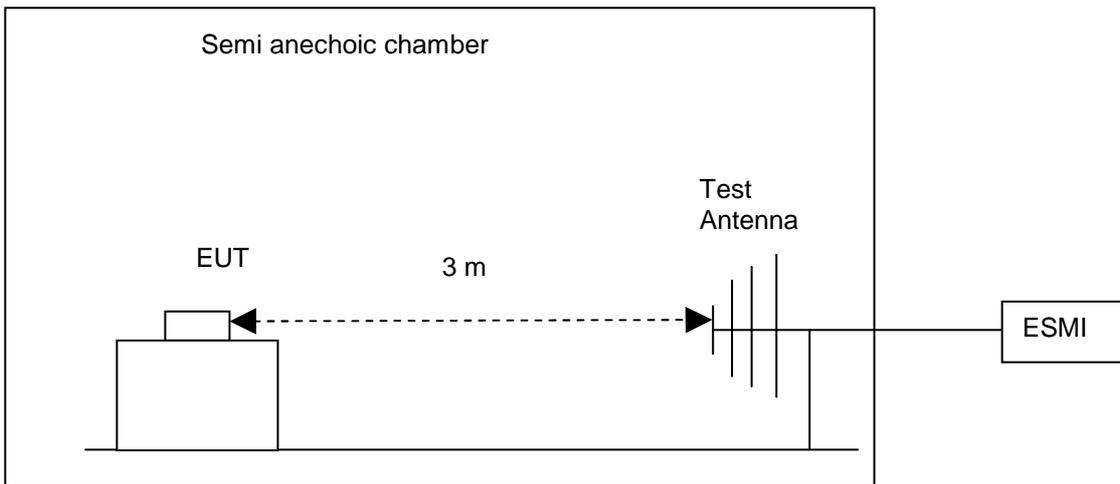


Figure 13. Test set up

**7.2.4 Measurement Results**

Table 58 MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
57.300000	31.60	-16.0	40.0	8.4	200.0	336.00	HORIZONTAL
121.800000	27.10	-9.6	43.5	16.4	118.0	352.00	HORIZONTAL
161.460000	26.80	-11.7	43.5	16.7	195.0	31.00	HORIZONTAL
240.120000	24.60	-9.2	46.0	21.4	126.0	43.00	HORIZONTAL
377.820000	22.90	-5.2	46.0	23.1	112.0	360.00	HORIZONTAL
664.200000	26.00	-1.5	46.0	20.0	131.0	50.00	HORIZONTAL

**7.2.5 Conclusion**

The equipment **PASSED** the requirement of this clause. For the measurement results refer to appendix G.

## 8 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

Table 59 System Measurement Uncertainty

Items		Extended Uncertainty
Effective Radiated Power of Transmitter	EIRP (dBm)	U=3dB; k=2
Band Width	Magnitude (%)	U= 0.2%; k=2
Band Edge Compliance	Disturbance Power (dBm)	U= 2.0dB; k=2
Conducted Spurious Emission at Antenna Terminal	Disturbance Power (dBm)	U= 2.0dB; k=2
Frequency Stability	Frequency Accuracy(ppm)	U= 0.21ppm; k=2
Field Strength of Spurious Radiation	ERP(dBm)	U=2.2dB; k=2
Conducted Output Power	Power(dBm)	U=0.39dB; k=2
Radiated Emission of enclosure at ideal mode	Field strength (dBμV/m)	U=3dB; k=2

## 9 Appendixes


Appendix A	Measurement Results Modulation Characteristics	4 pages
Appendix B	Measurement Results Occupied Bandwidth	10 pages
Appendix C	Measurement Results Band Edges	7 pages
Appendix D	Measurement Results Spurious Emission at Antenna Terminal	37 pages
Appendix E	Measurement Results Radiated Spurious Emission	10 pages
Appendix F	Measurement Results Conducted Emission at Power Port	2 pages
Appendix G	Measurement Results Radiated Emission of Enclosure at Idle Mode	2 pages
Appendix H	Photos of Test Setup	3 pages

# Appendix A


## Modulation Characteristics

According to FCC Part 2.1047 & Part22 Subpart H


## Channel 192 (TM1:GPRS/GSM)

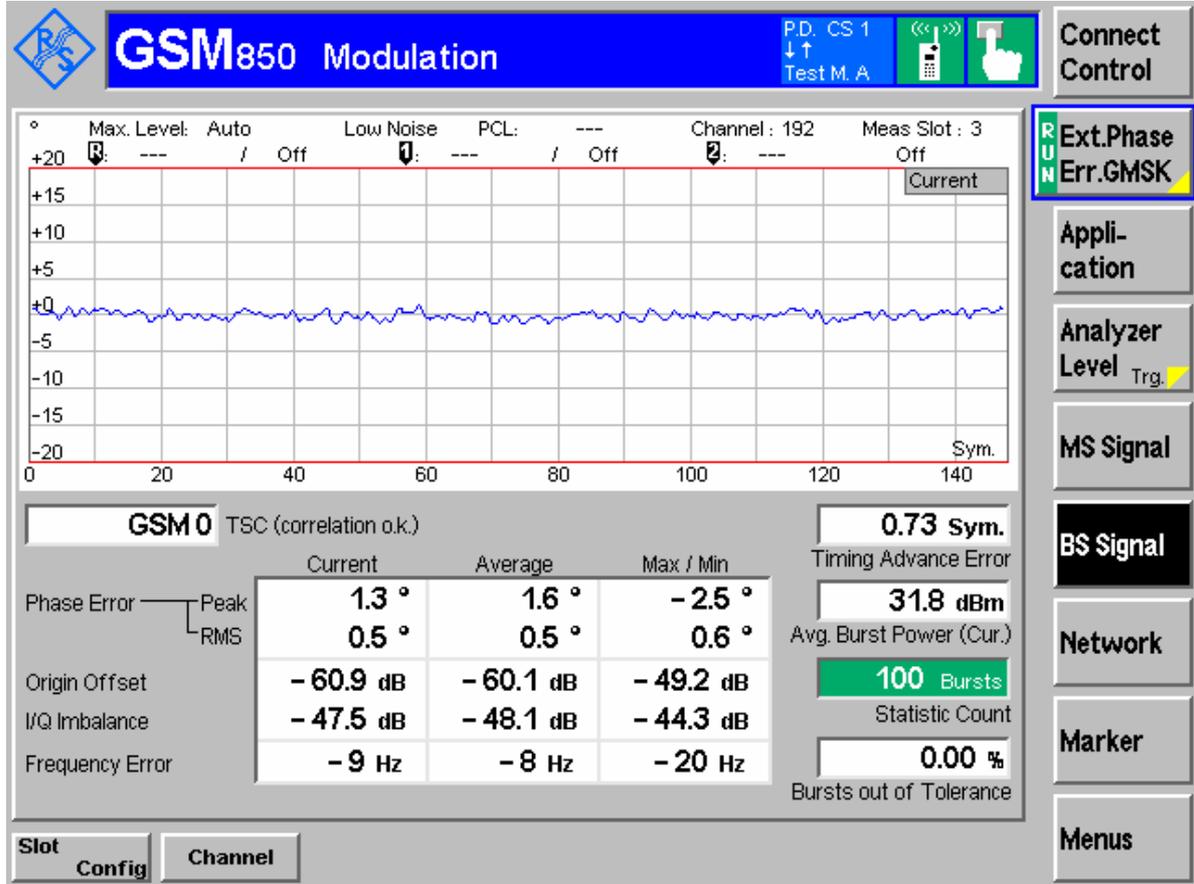

## Channel 192 (TM2:EDGE)

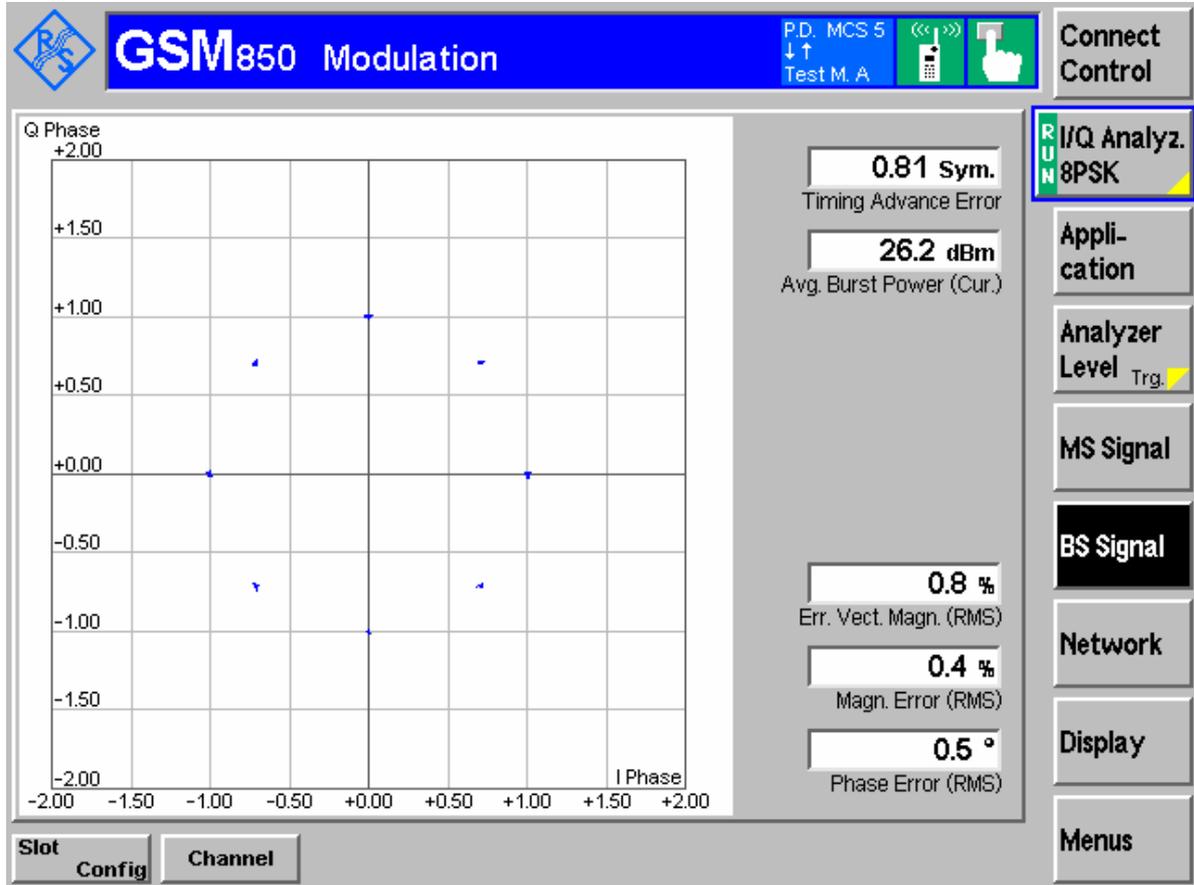

### Channel 4182 (TM3:HSDPA/WCDMA)

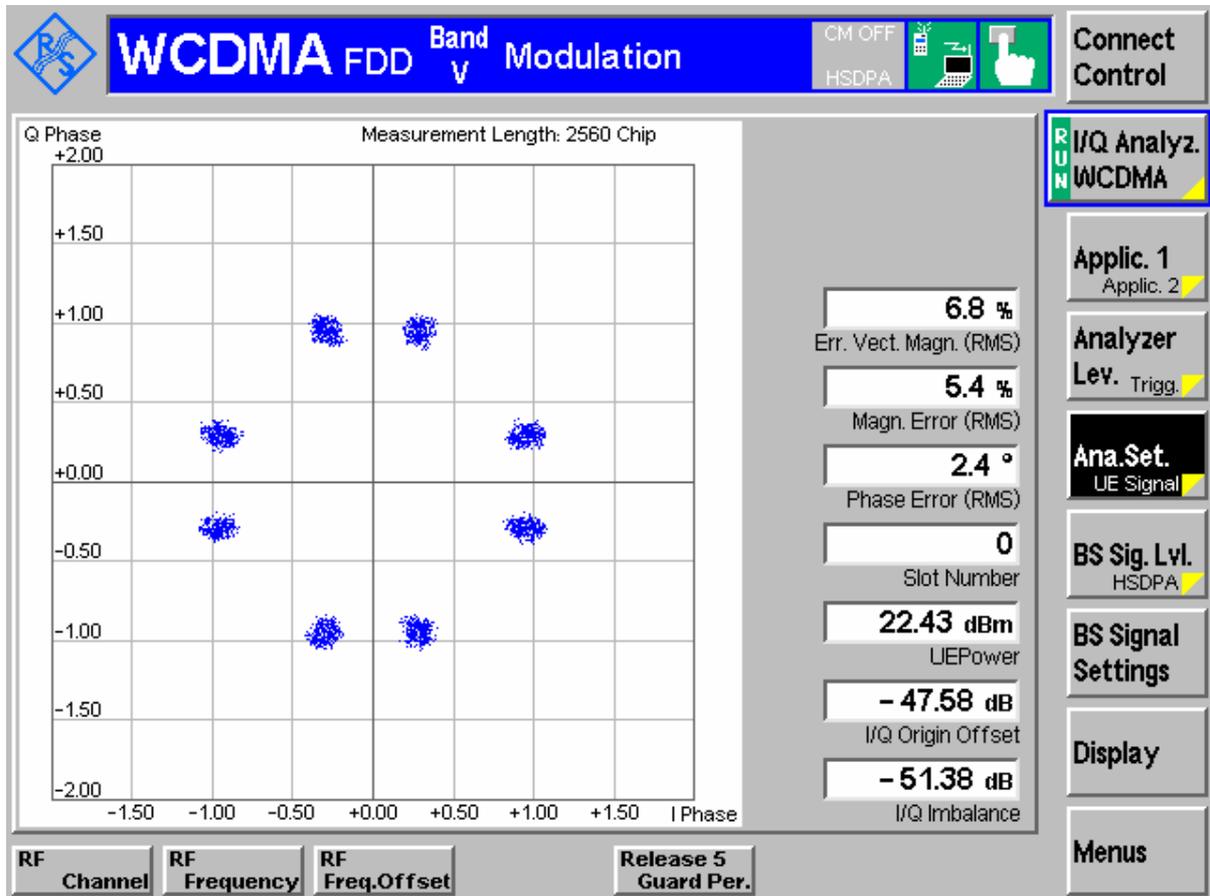


## Appendix B

# Occupied Bandwidth


According to FCC Part 2.1049 & Part 22 Subpart H

# Channel 128 (TM1:GPRS/GSM)

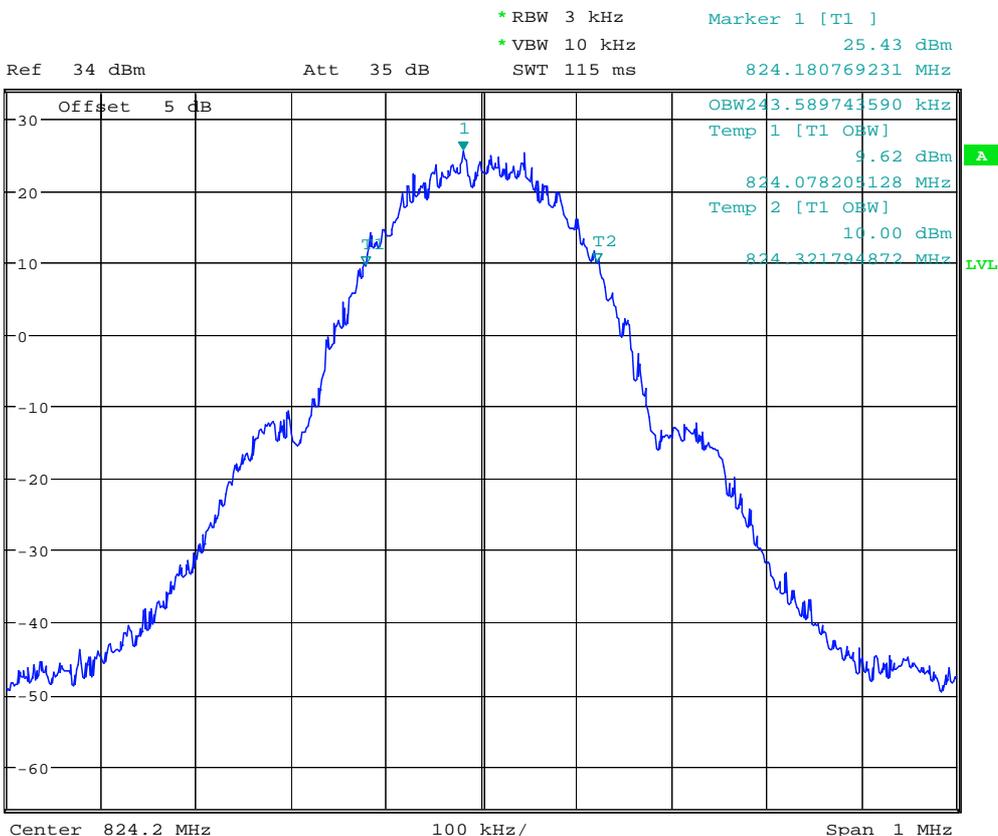


Date: 9.AUG.2007 21:14:26

# Channel 128 (TM2:EDGE)

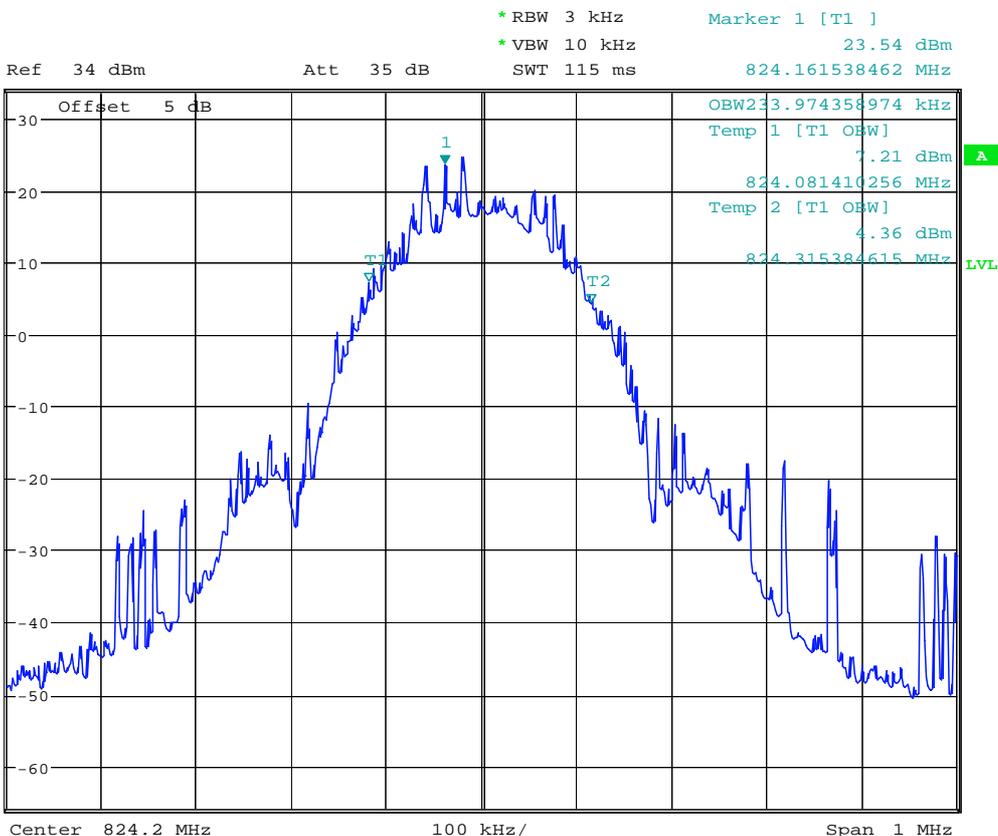


Date: 9.AUG.2007 21:16:01

# Channel 4132 (TM3:HSDPA/WCDMA)

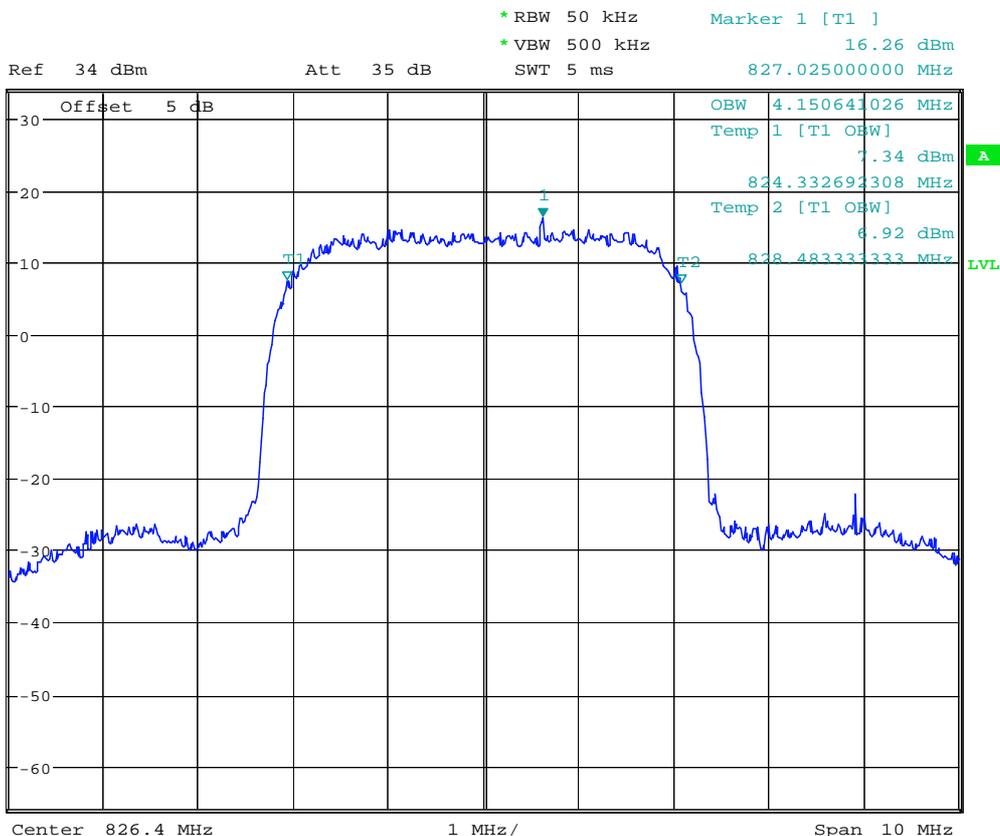

Date: 9.AUG.2007 21:27:42

# Channel 192 (TM1:GPRS/GSM)

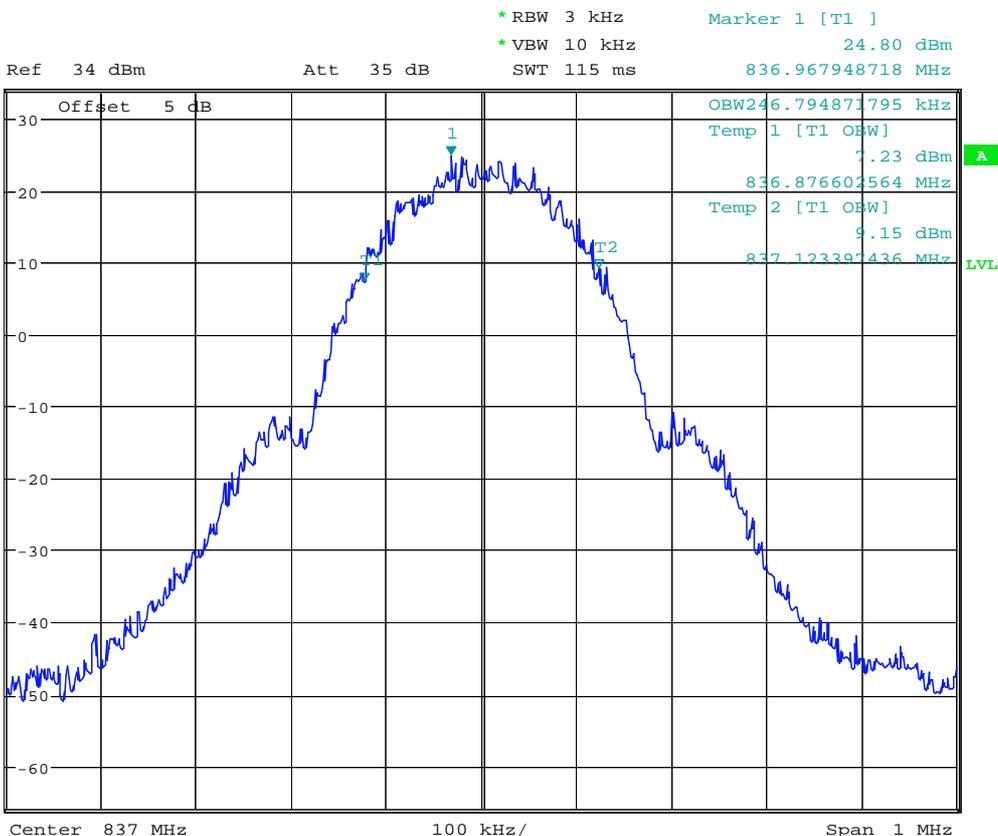


Date: 9.AUG.2007 21:25:07

# Channel 192 (TM2:EDGE)




Ref 34 dBm Att 35 dB \*RBW 3 kHz \*VBW 10 kHz SWT 115 ms Marker 1 [T1 ] 22.12 dBm 836.940705128 MHz

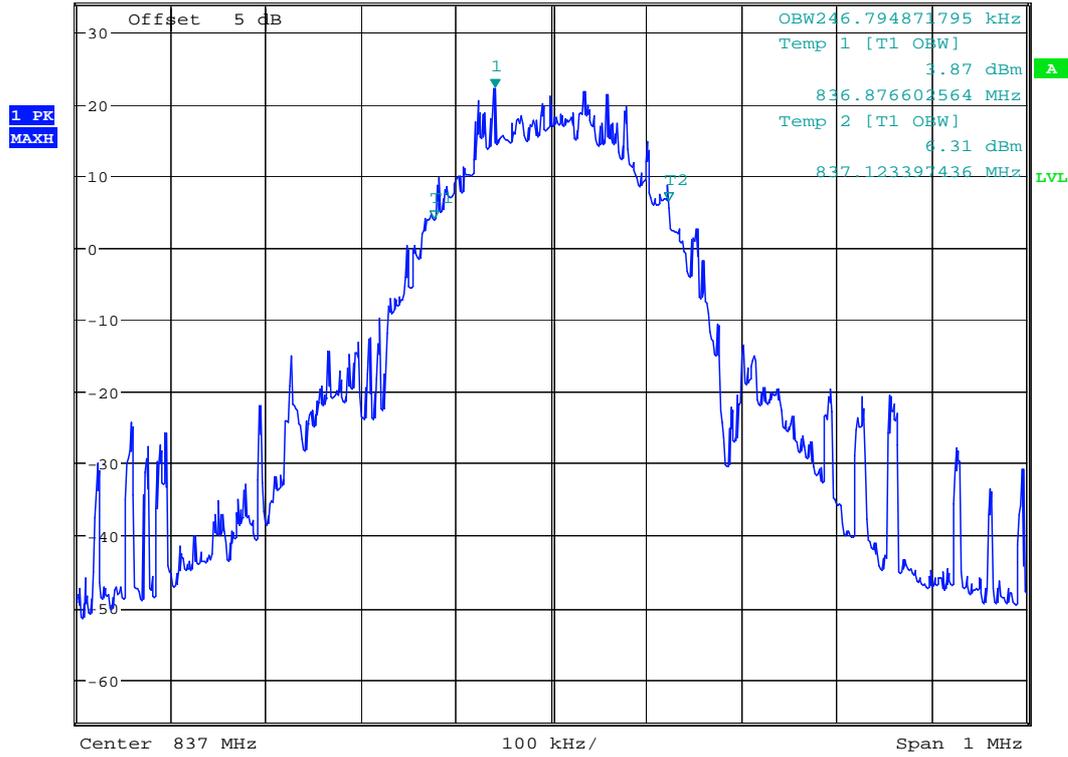

Date: 9.AUG.2007 21:20:44

# Channel 4182 (TM3:HSDPA/WCDMA)

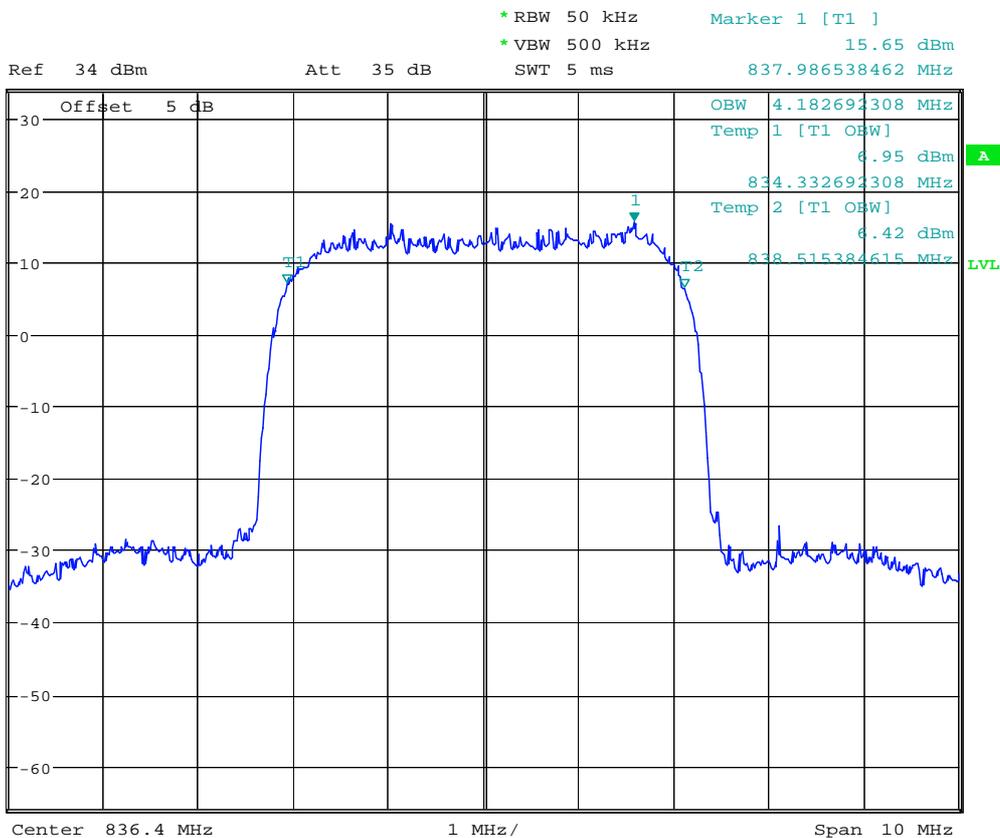


Date: 9.AUG.2007 21:29:24



# Channel 251 (TM2:EDGE)




Ref 34 dBm Att 35 dB SWT 115 ms \*RBW 3 kHz \*VBW 10 kHz Marker 1 [T1 ] 22.59 dBm 848.783974359 MHz

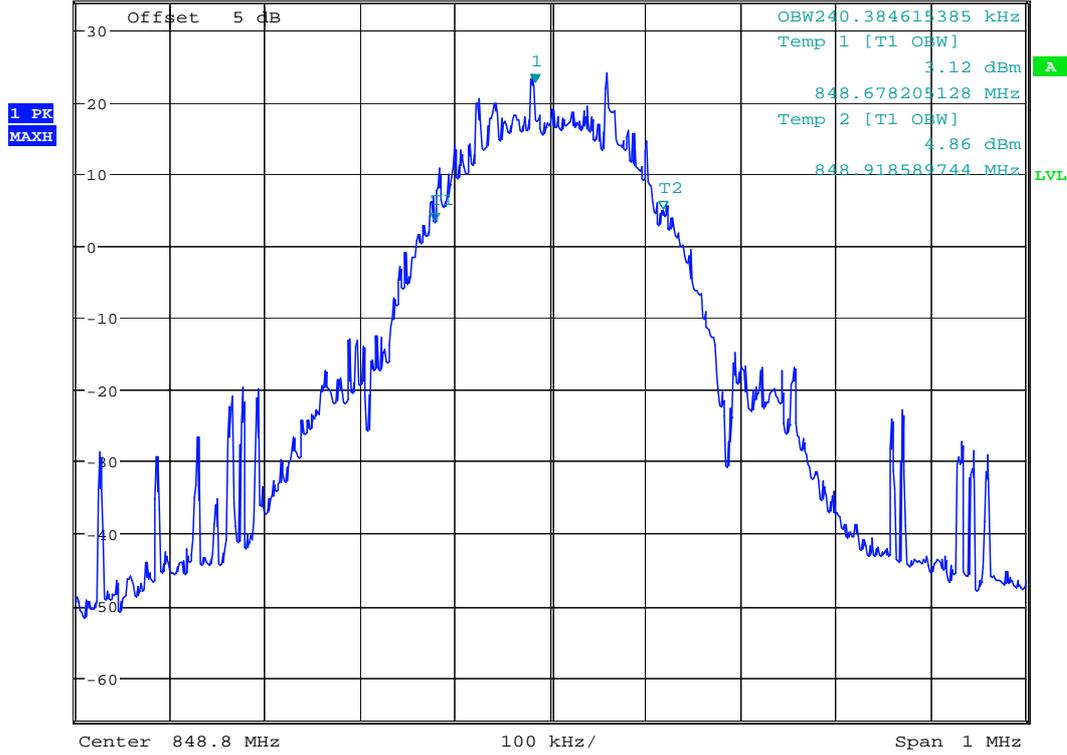

Date: 9.AUG.2007 21:22:19

# Channel 4233 (TM3:HSDPA/WCDMA)

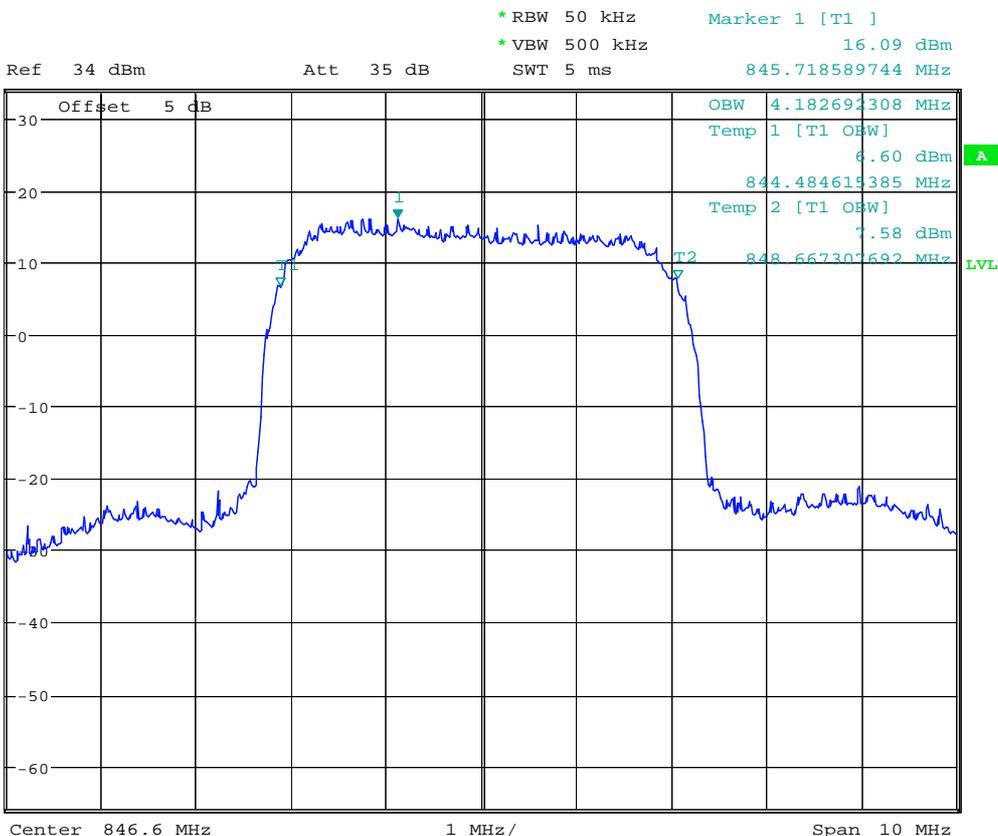

Date: 9.AUG.2007 21:30:45


# Appendix C

## Band Edges Compliance According to FCC Part 2.1051 & 22.917

# TM1:GPRS/GSM


## Left Edge

### Channel 128

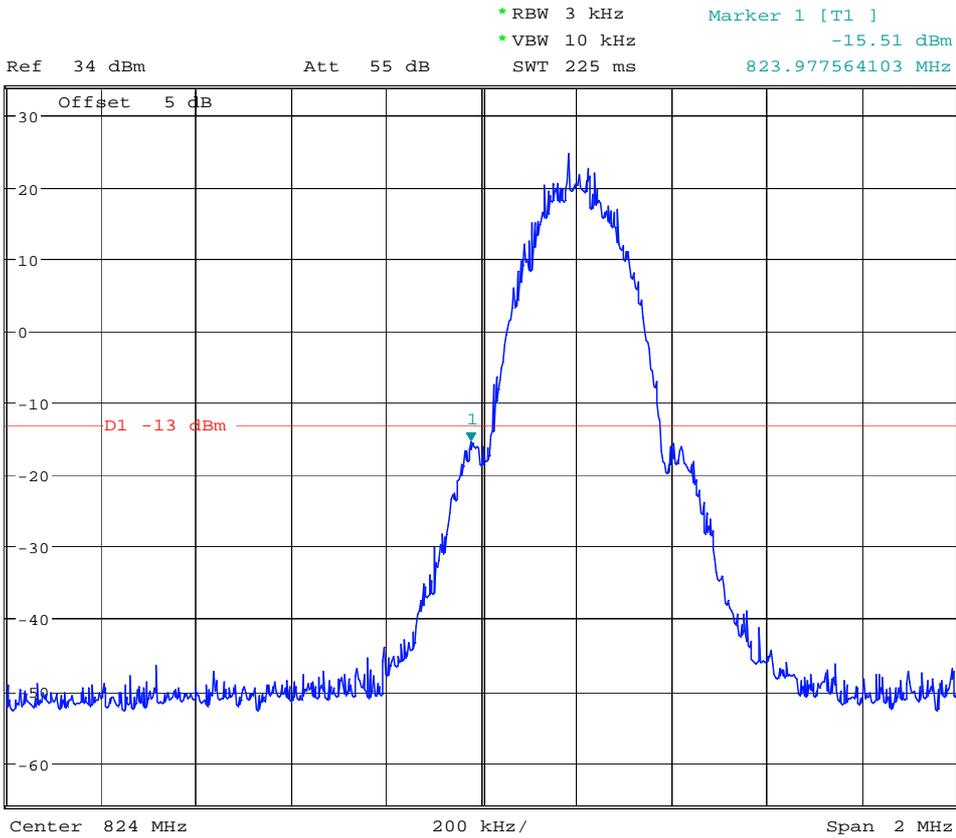

Date: 30.AUG.2007 02:33:15

### Right Edge Channel 251

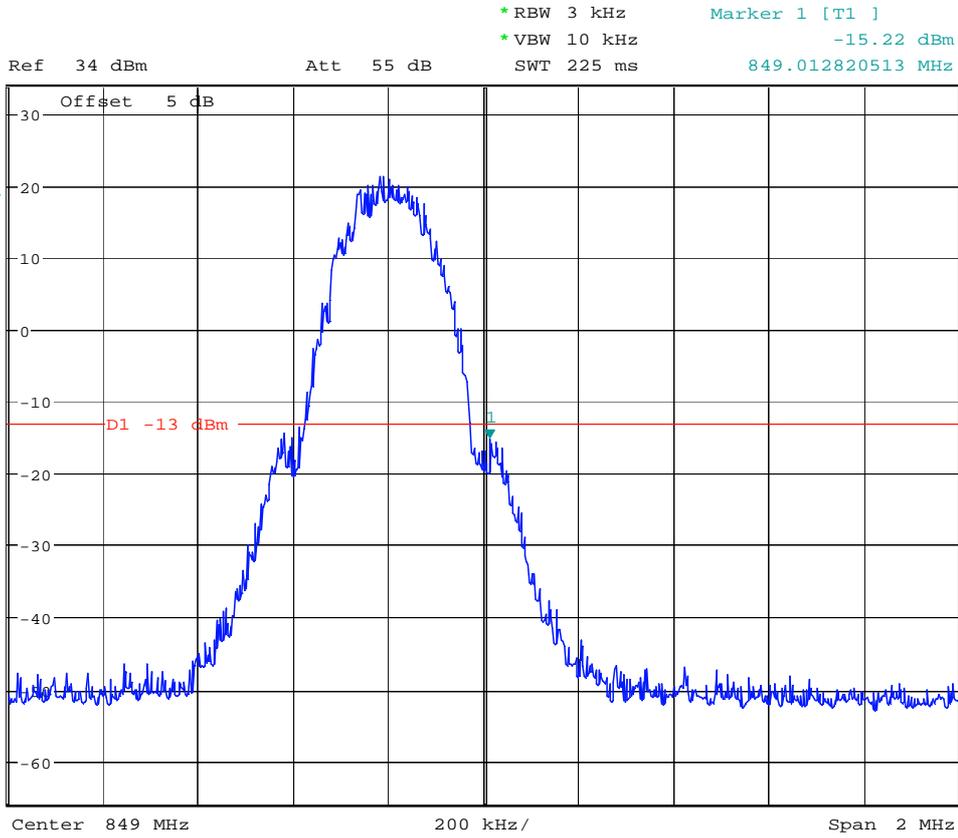


Date: 30.AUG.2007 02:43:34

# TM2:EDGE Left Edge Channel 128



Ref 34 dBm Att 55 dB SWT 225 ms  
\*RBW 3 kHz \*VBW 10 kHz  
Marker 1 [T1] -16.34 dBm  
823.996794872 MHz

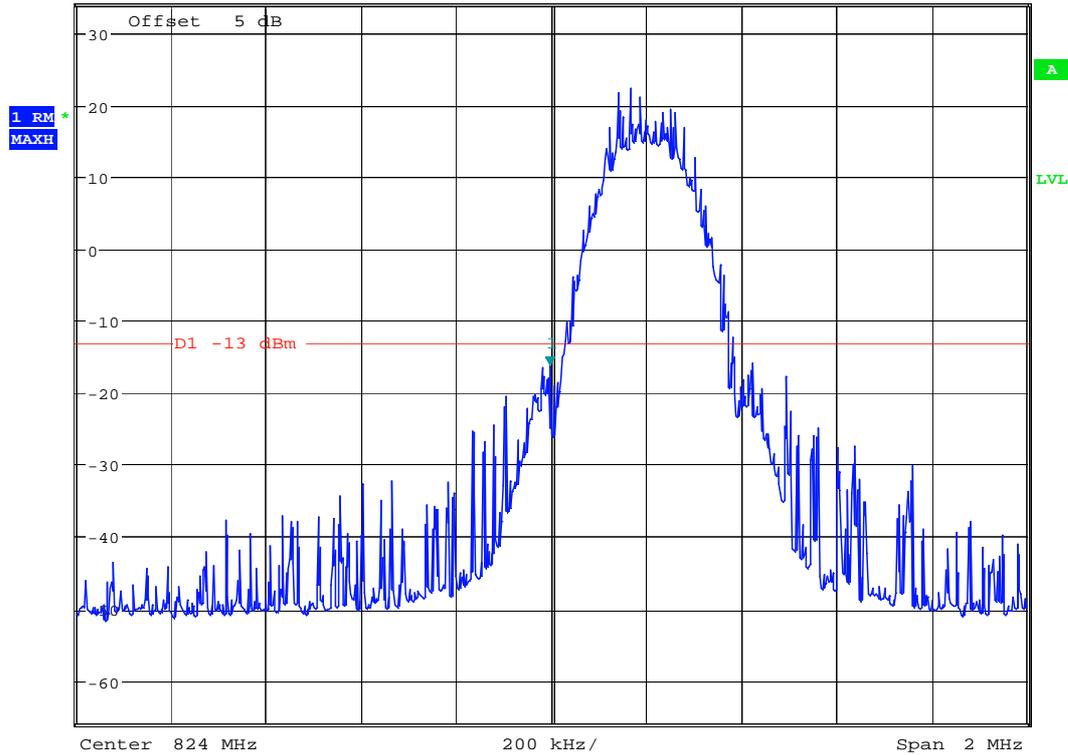


Date: 30.AUG.2007 02:57:11

### Right Edge Channel 251



\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 10 kHz      -19.21 dBm  
SWT 225 ms      849.054487179 MHz

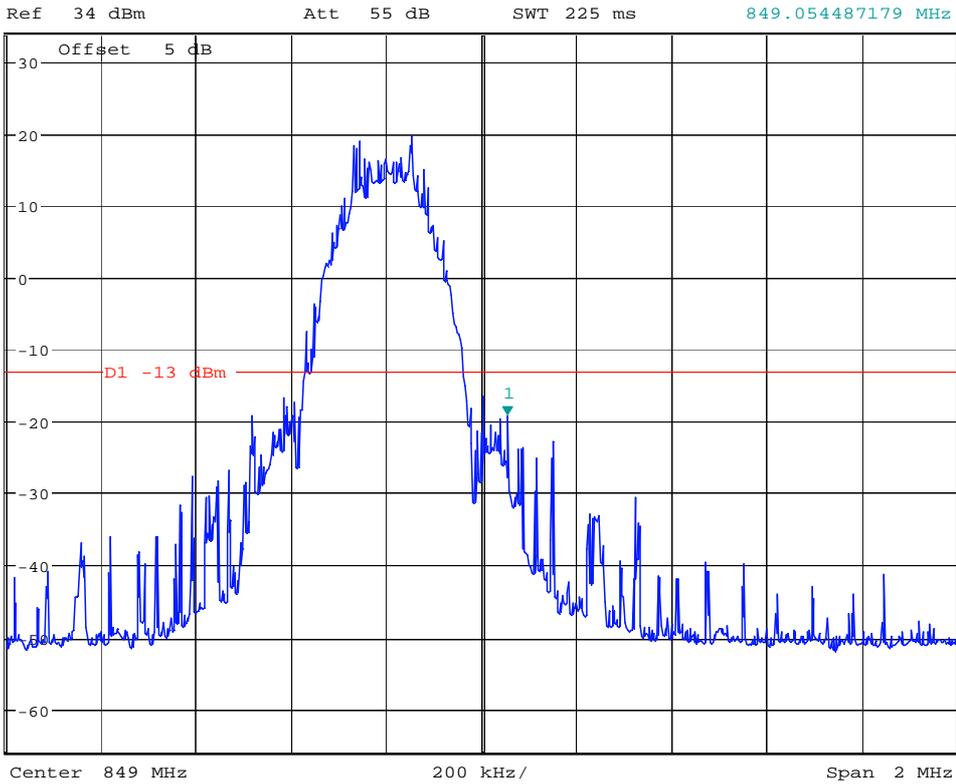


Date: 30.AUG.2007 03:00:45

# TM3:HSDPA/WCDMA


## Left Edge

### Channel 4132

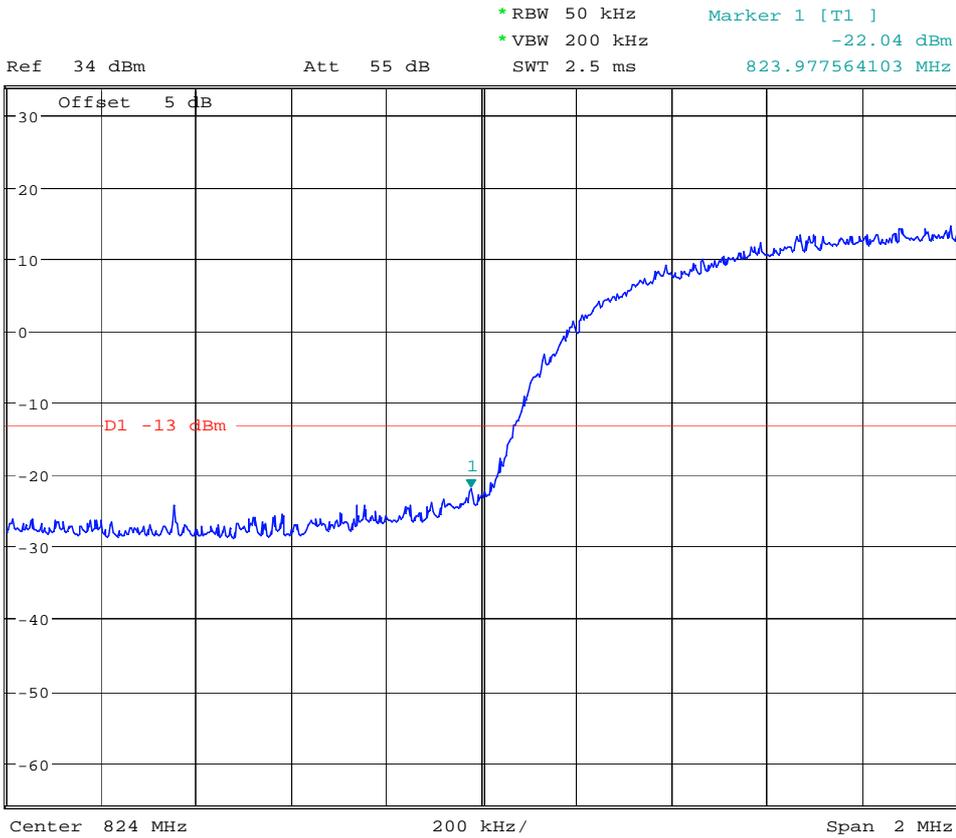

Date: 9.AUG.2007 20:53:45

### Right Edge Channel 4233

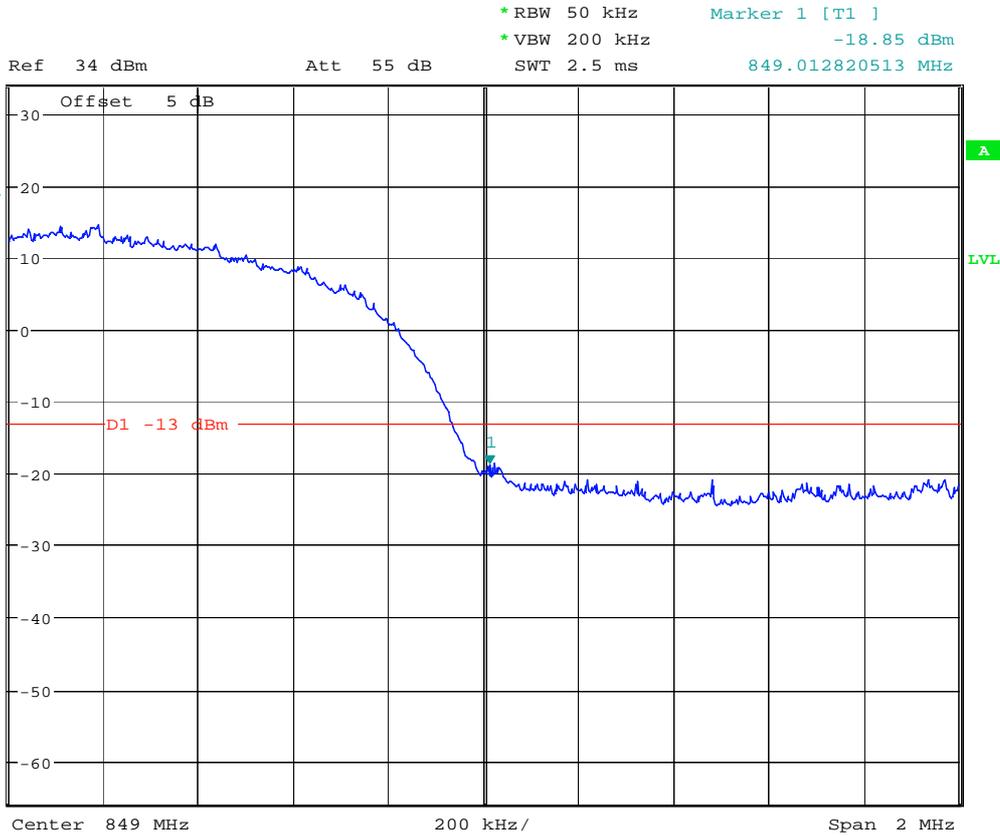

Date: 9.AUG.2007 20:37:04

## Appendix D

# Spurious Emission at Antenna Terminal

According to FCC Part 2.1051 & 22.917

# TM1:GPRS/GSM


## Channel 128



\*RBW 1 kHz      Marker 1 [T1 ]  
\*VBW 3 kHz      -31.55 dBm  
SWT 95 ms      63.979166667 kHz

Ref 34 dBm

Att 55 dB

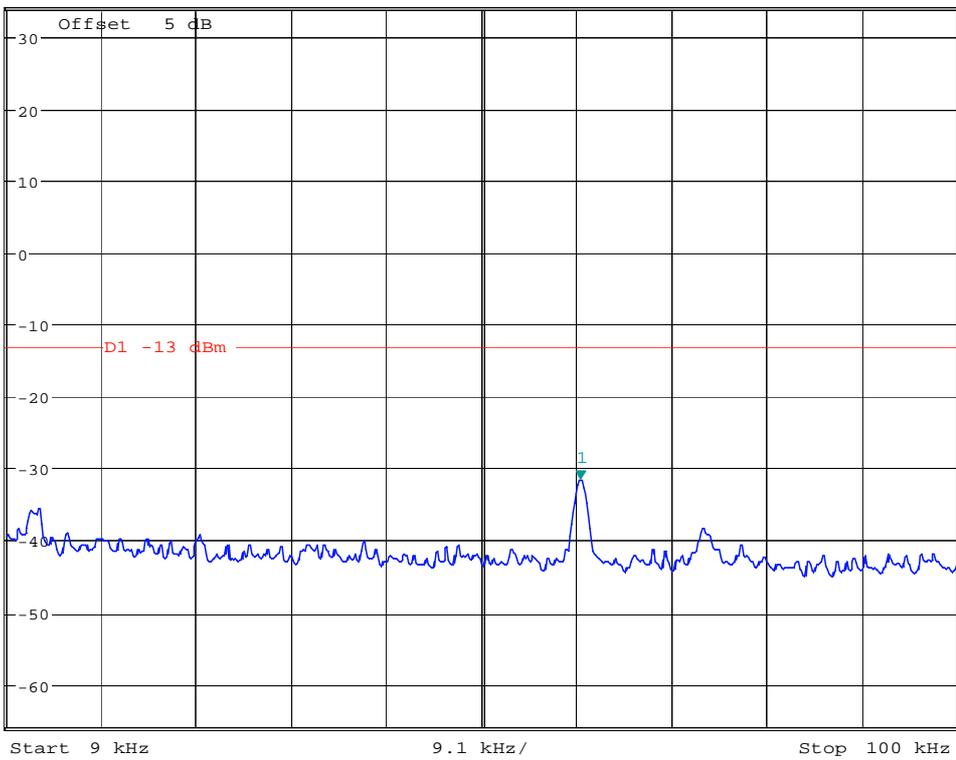


Date: 30.AUG.2007 03:29:22




\*RBW 10 kHz      Marker 1 [T1 ]  
\*VBW 30 kHz      -32.33 dBm  
SWT 500 ms      100.00000000 kHz

Ref 34 dBm

Att 55 dB

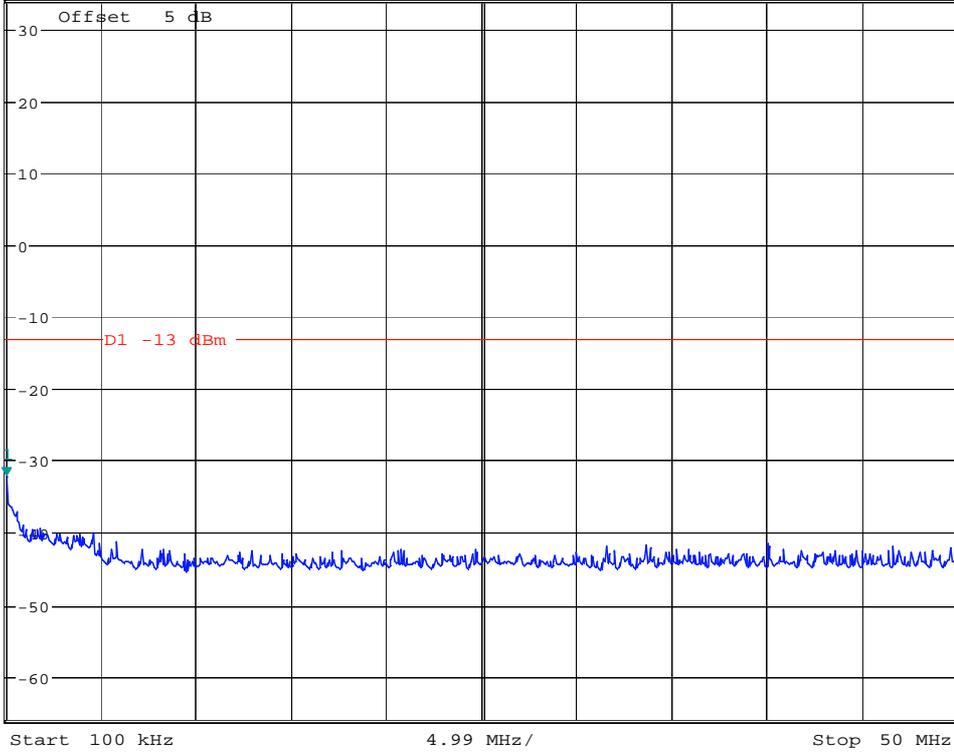

Date: 30.AUG.2007 03:31:15

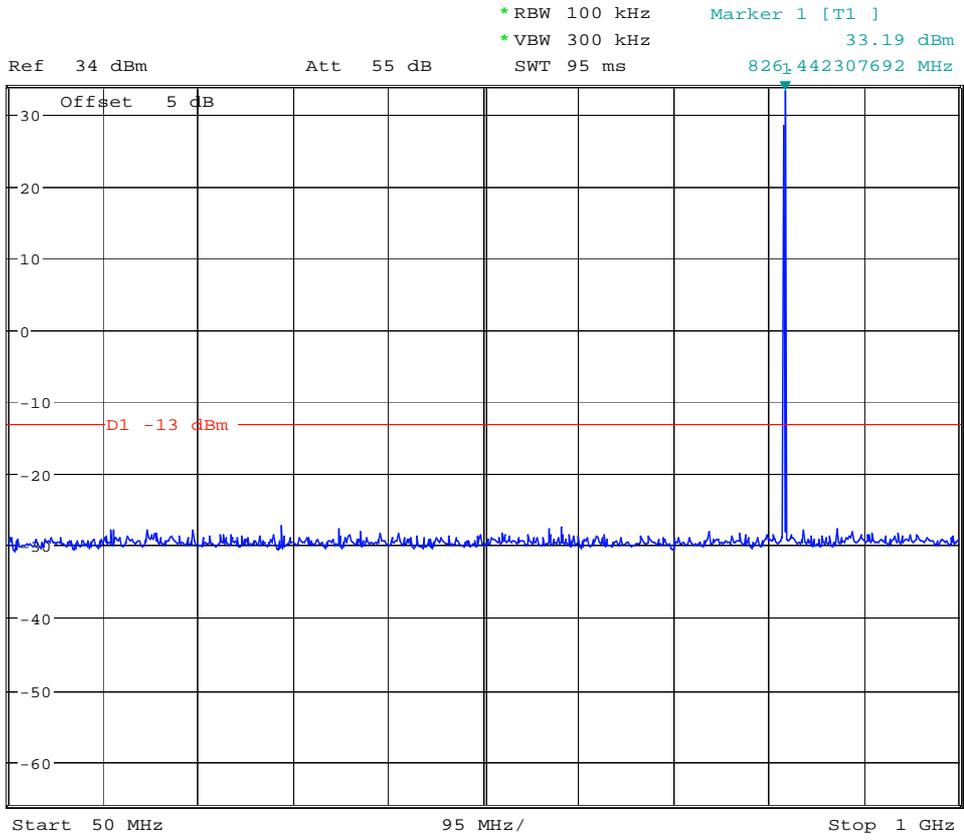


Date: 30.AUG.2007 03:32:37



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.65 dBm  
SWT 70 ms      3.466746795 GHz

Ref 34 dBm

Att 55 dB

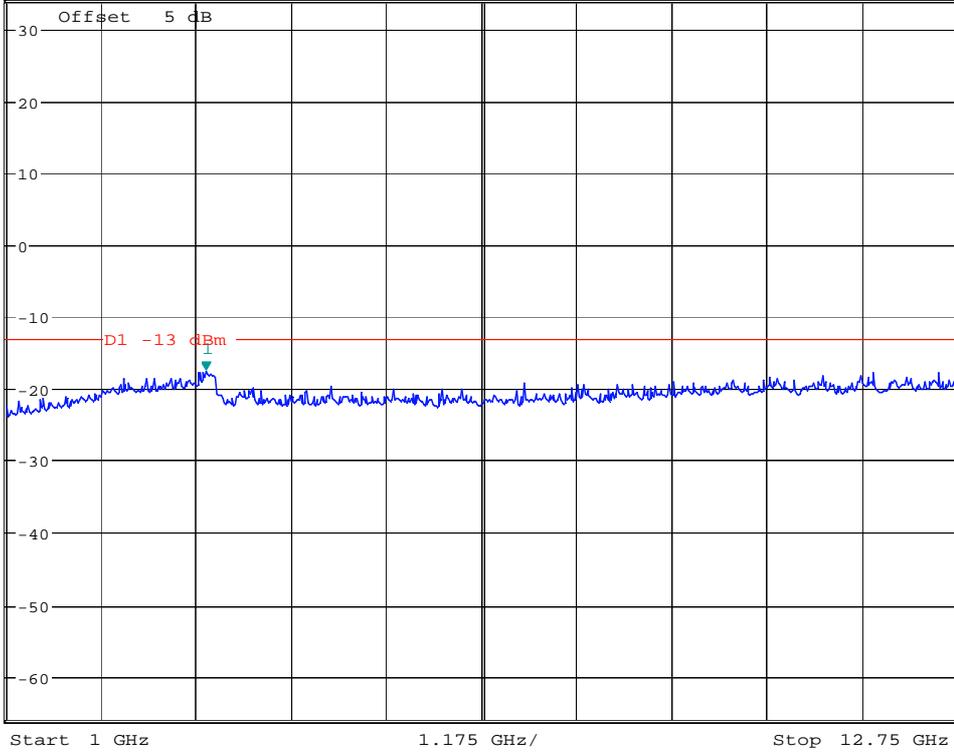

Date: 9.AUG.2007 20:21:40






\*RBW 10 kHz      Marker 1 [T1 ]  
\*VBW 30 kHz      -32.04 dBm  
SWT 500 ms      100.00000000 kHz

Ref 34 dBm


Att 55 dB

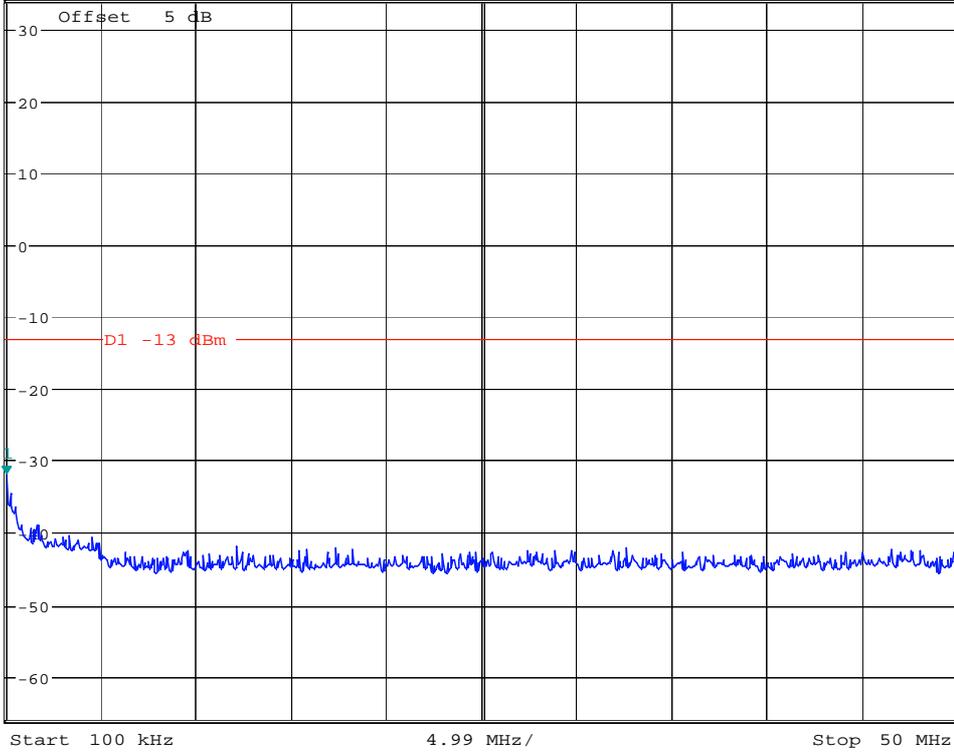

Date: 30.AUG.2007 03:35:06



Ref 34 dBm Att 55 dB SWT 95 ms  
\*RBW 100 kHz \*VBW 300 kHz  
Marker 1 [T1 ] 33.22 dBm  
838.621794872 MHz

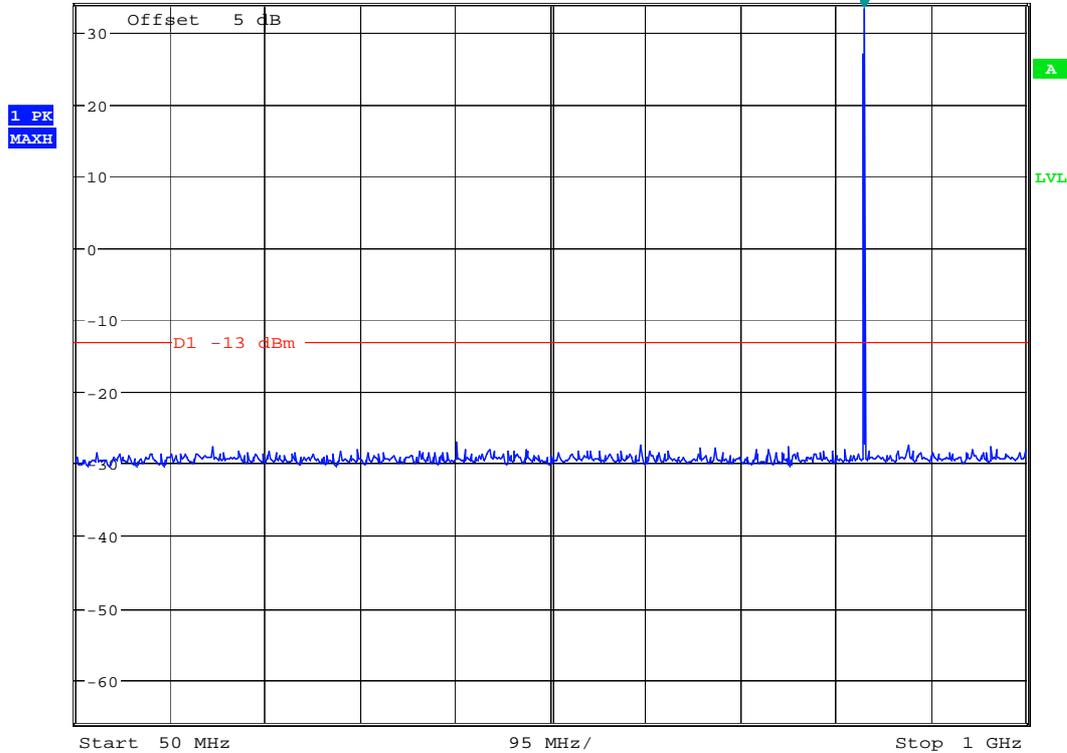


Date: 30.AUG.2007 03:36:55



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.96 dBm  
SWT 70 ms      3.184294872 GHz

Ref 34 dBm

Att 55 dB

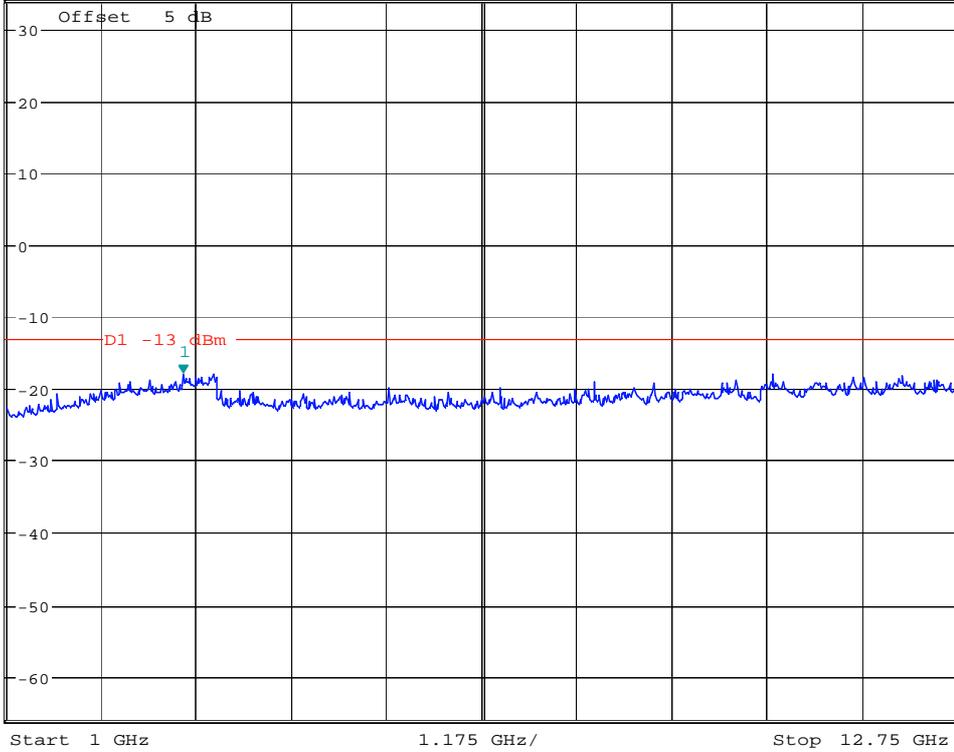


Date: 9.AUG.2007 20:21:56

# Channel 251



\*RBW 1 kHz  
\*VBW 3 kHz  
Marker 1 [T1 ]  
-32.33 dBm  
63.83333333 kHz

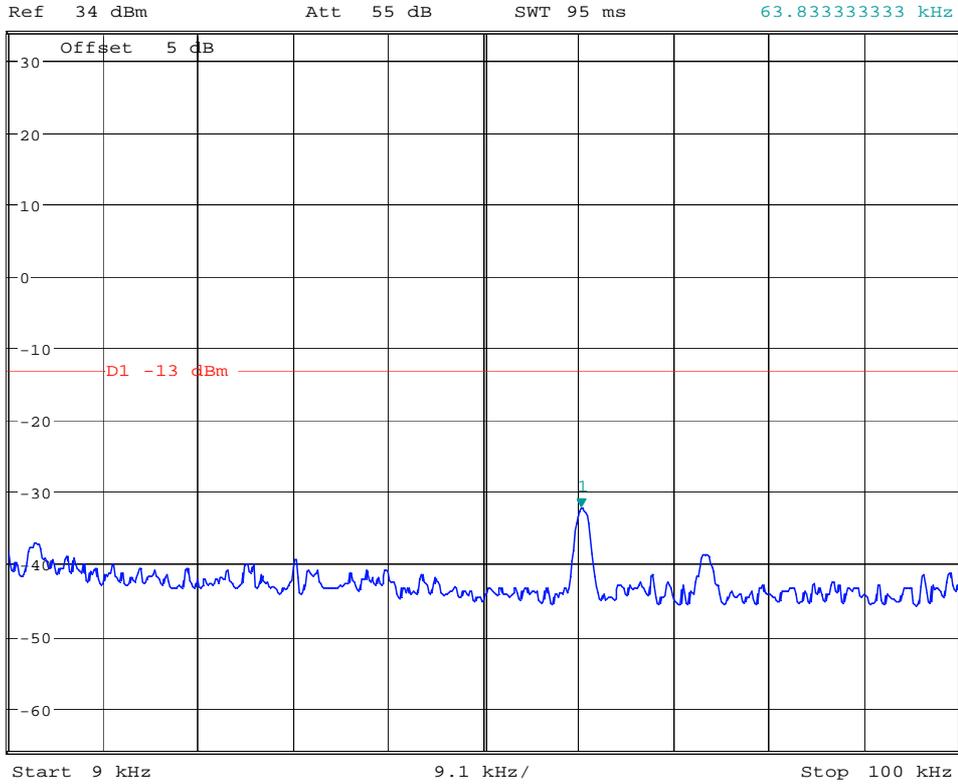


Date: 30.AUG.2007 03:38:13



\*RBW 10 kHz      Marker 1 [T1 ]  
\*VBW 30 kHz      -32.77 dBm  
SWT 500 ms      100.00000000 kHz

Ref 34 dBm

Att 55 dB

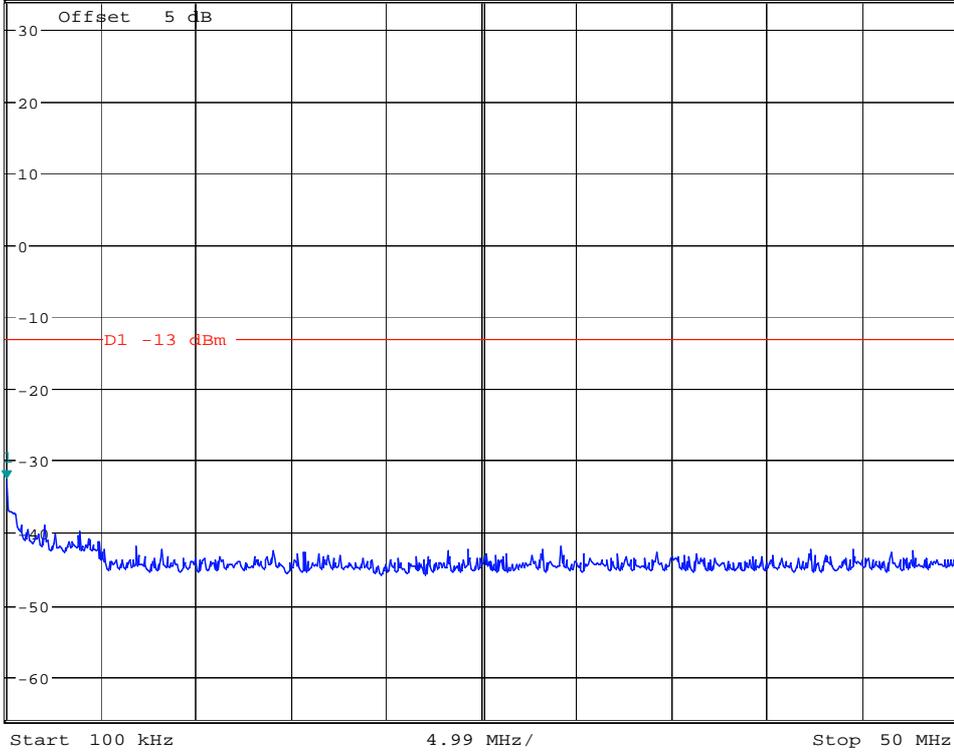

Date: 30.AUG.2007 03:39:12




Ref 34 dBm Att 55 dB \*RBW 100 kHz \*VBW 300 kHz SWT 95 ms

Marker 1 [T1 ]

33.05 dBm

850.801282051 MHz

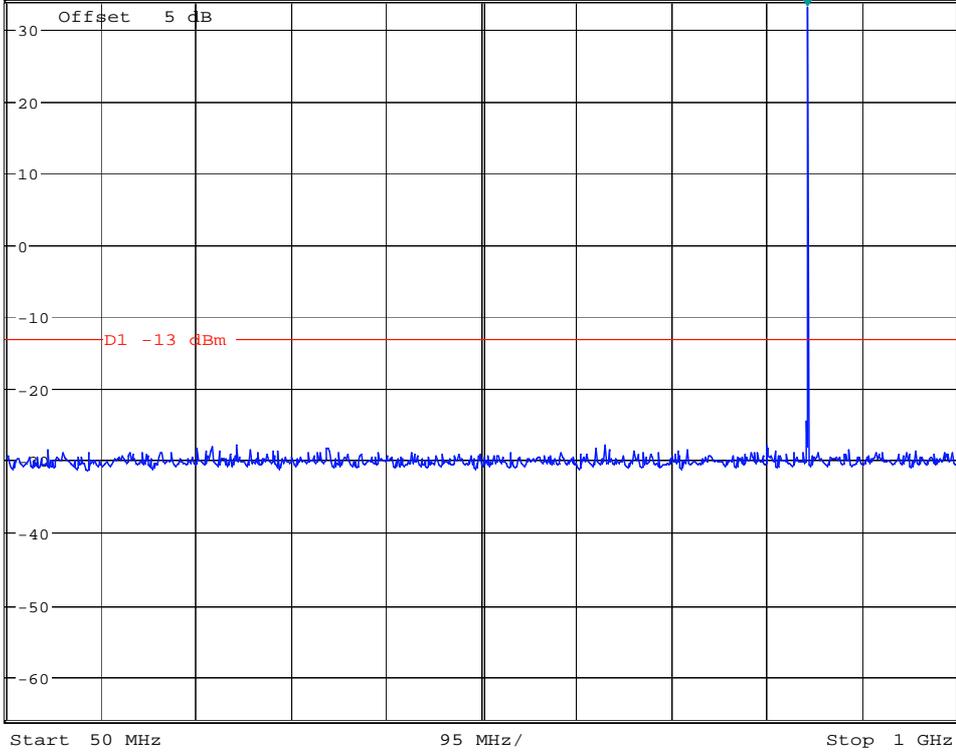


Date: 30.AUG.2007 03:39:48



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.62 dBm  
SWT 70 ms      3.165464744 GHz

Ref 34 dBm

Att 55 dB

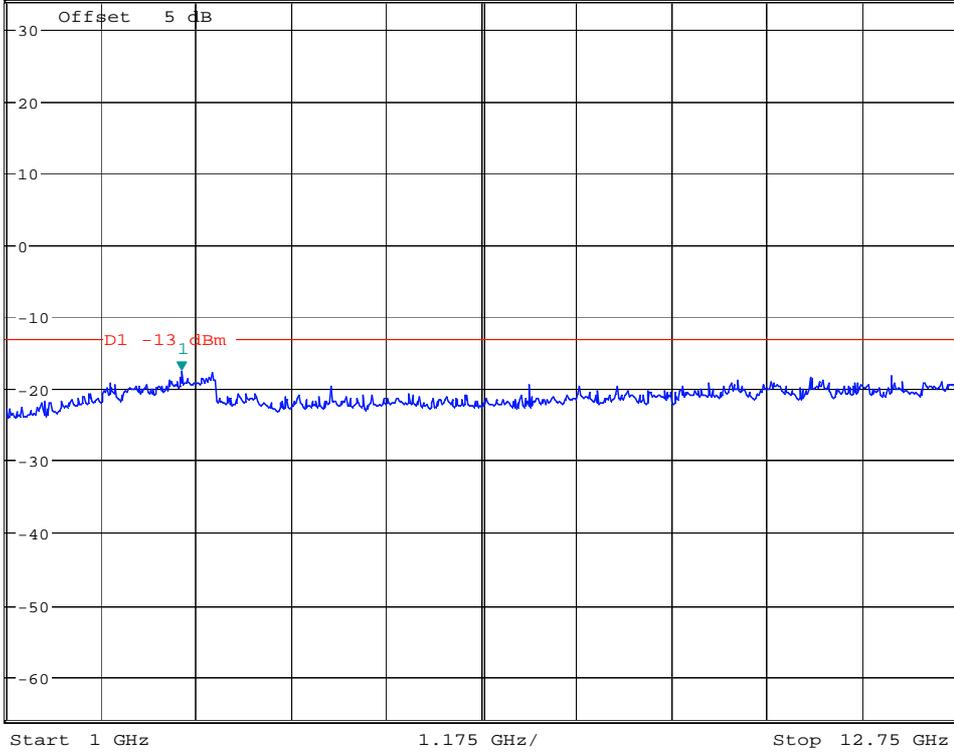

Date: 9.AUG.2007 20:22:21






Ref 34 dBm Att 55 dB \*RBW 10 kHz \*VBW 30 kHz SWT 500 ms

Marker 1 [T1 ]

-32.16 dBm


100.00000000 kHz

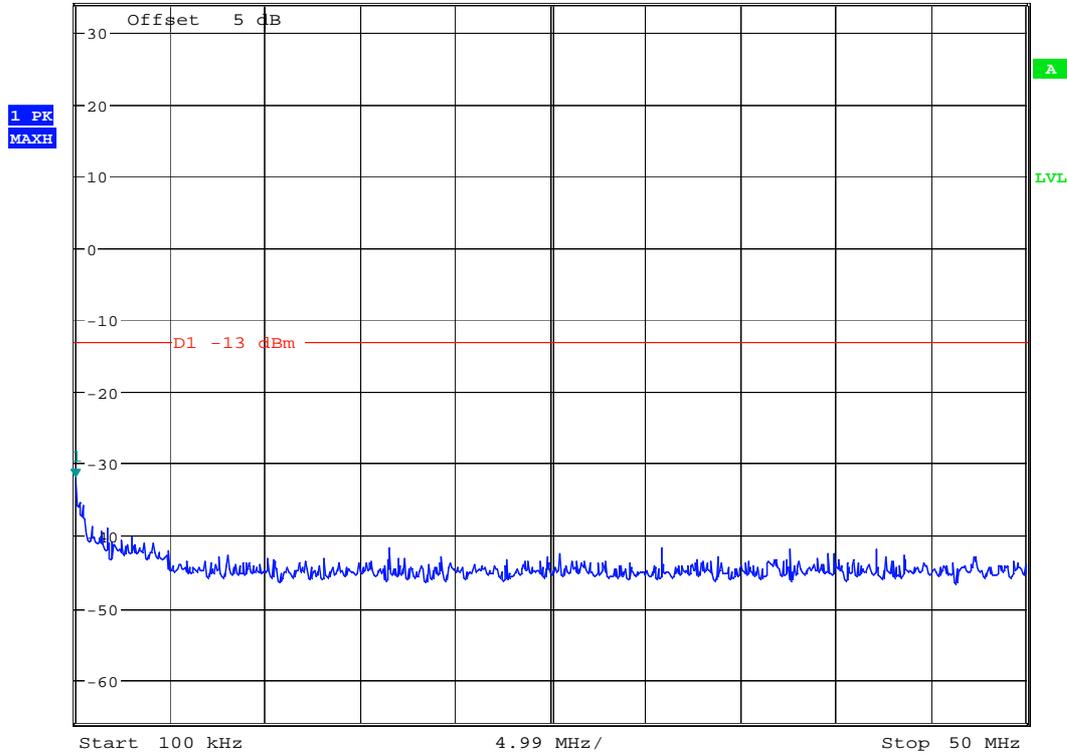

Date: 30.AUG.2007 03:43:41



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 300 kHz      29.70 dBm  
SWT 95 ms      826.442307692 MHz

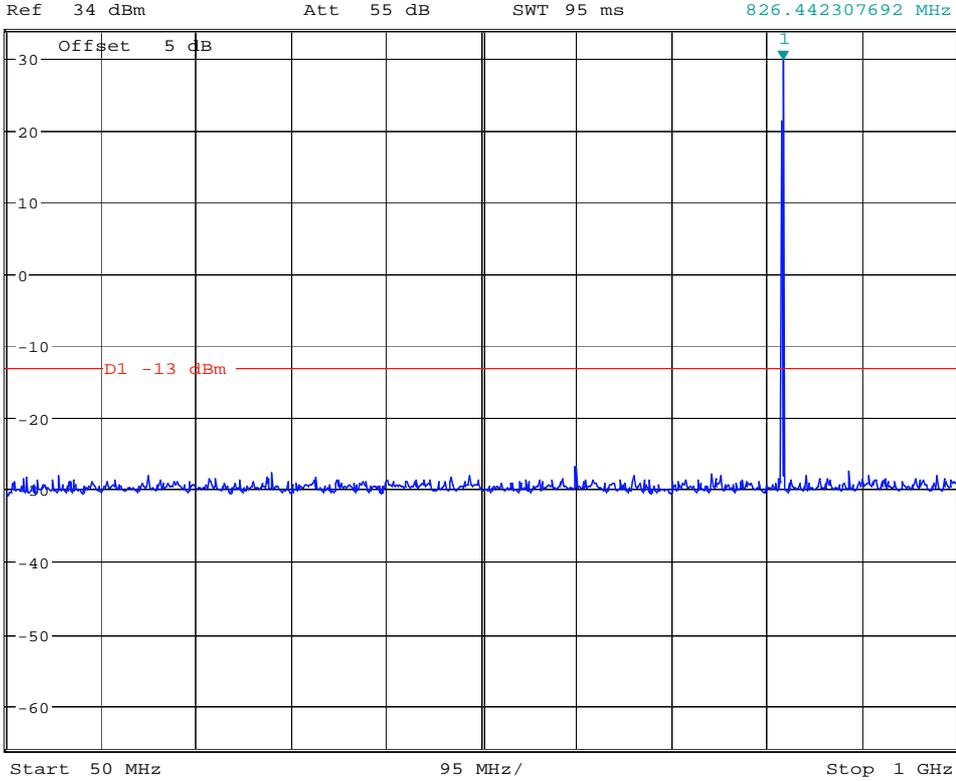


Date: 30.AUG.2007 03:48:15



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.06 dBm  
SWT 70 ms      3.560897436 GHz

Ref 34 dBm

Att 55 dB

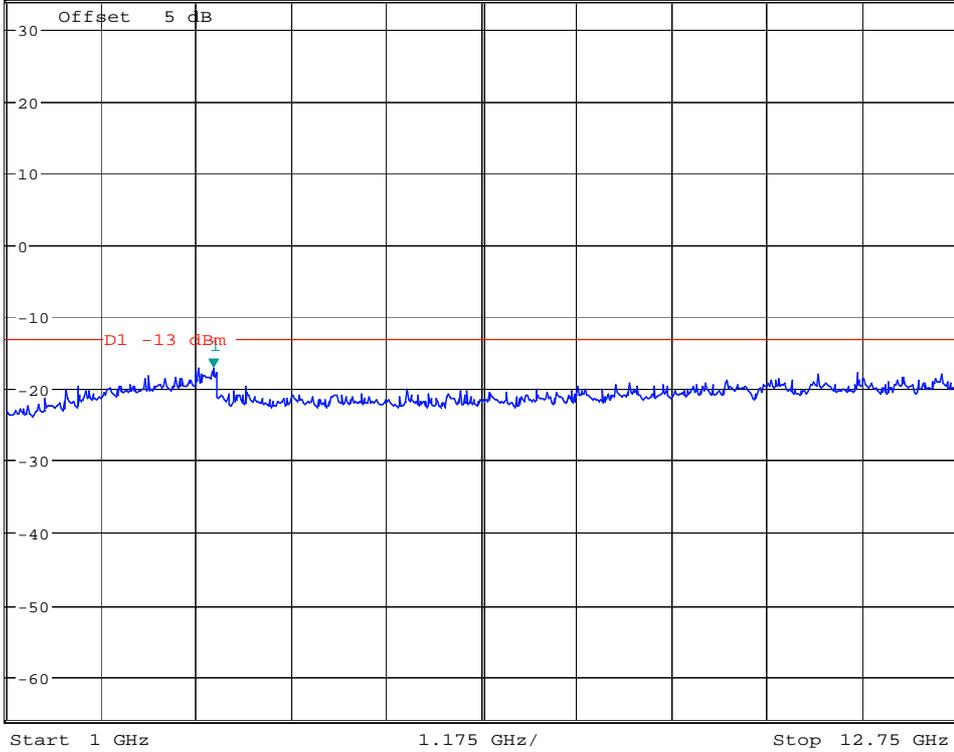


Date: 9.AUG.2007 20:25:25

# Channel 192



\*RBW 1 kHz      Marker 1 [T1 ]  
\*VBW 3 kHz      -32.33 dBm  
SWT 95 ms      63.979166667 kHz

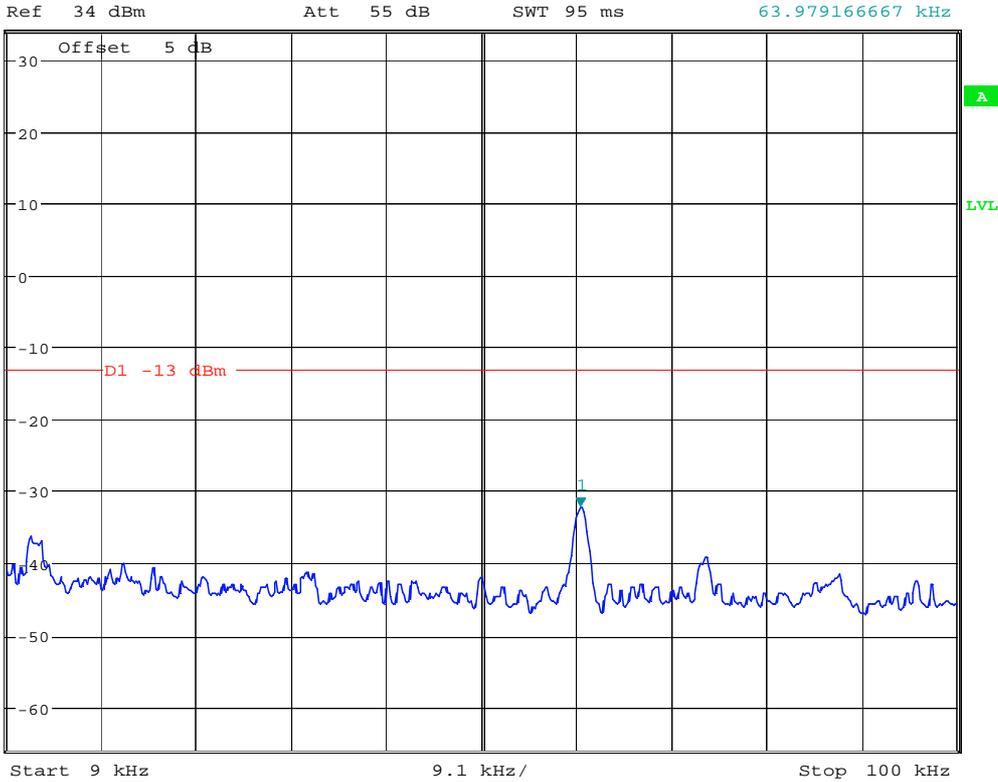


Date: 30.AUG.2007 03:42:32




\*RBW 10 kHz      Marker 1 [T1 ]  
\*VBW 30 kHz      -32.42 dBm  
SWT 500 ms      100.00000000 kHz

Ref 34 dBm

Att 55 dB

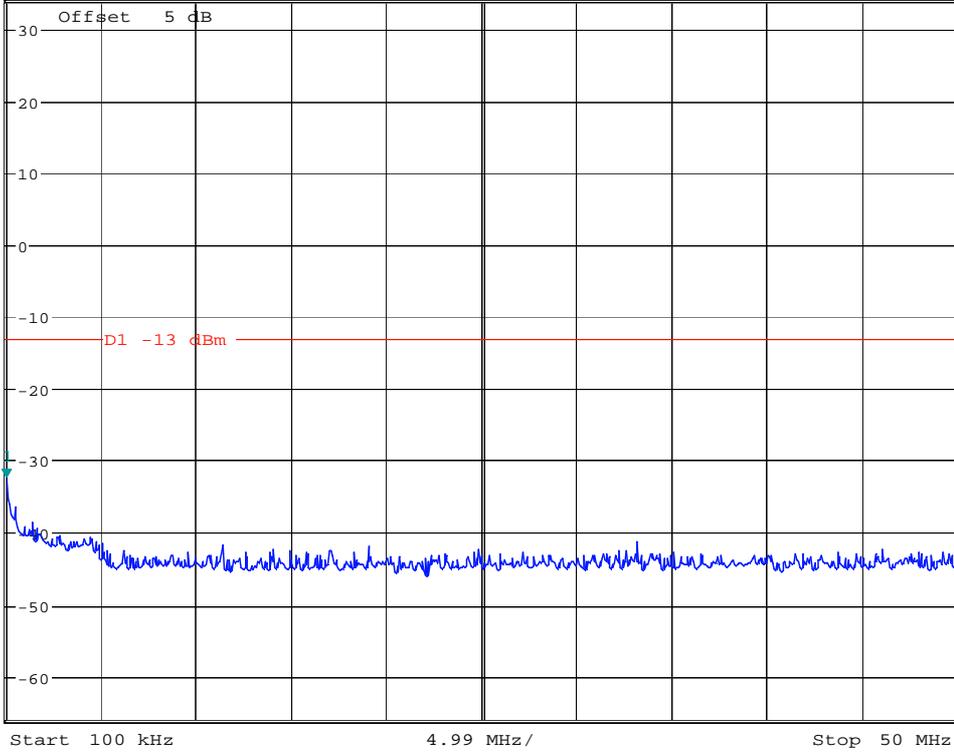

Date: 30.AUG.2007 03:44:37

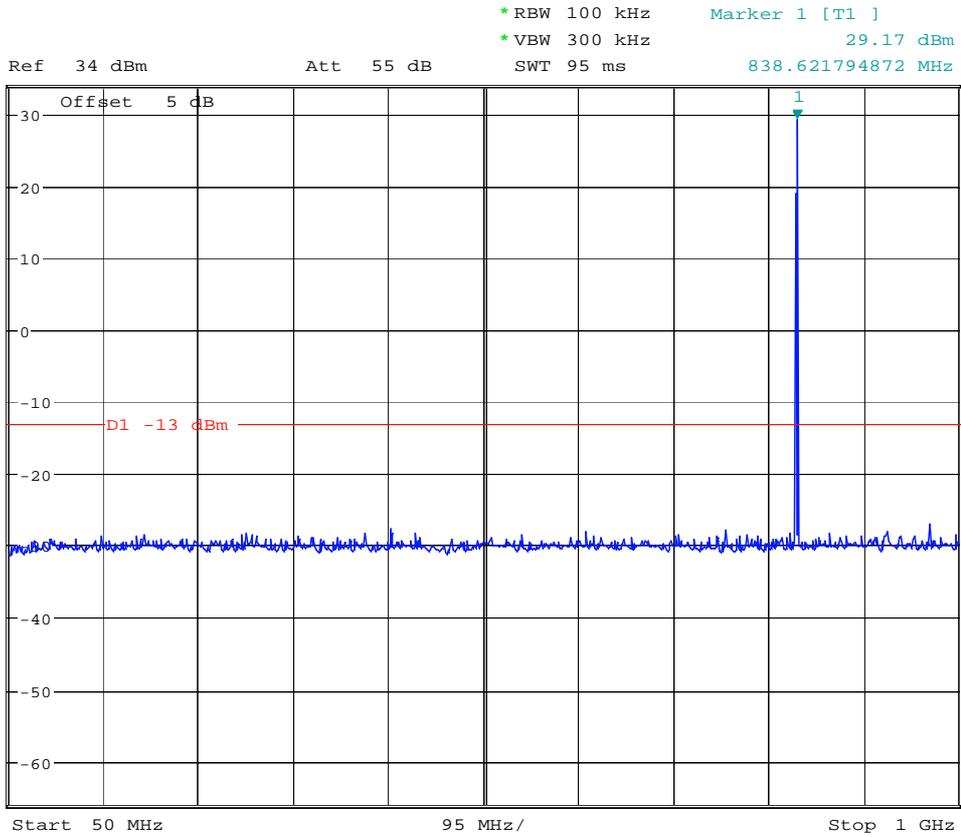


Date: 30.AUG.2007 04:51:43



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.03 dBm  
SWT 70 ms      3.579727564 GHz


Ref 34 dBm

Att 55 dB

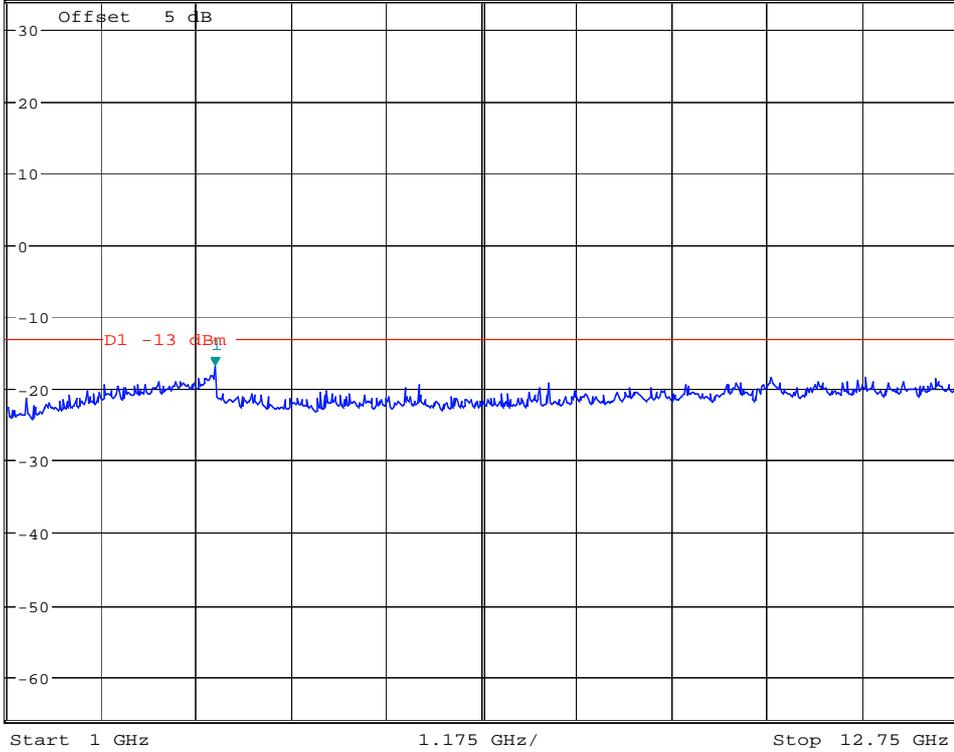

Date: 9.AUG.2007 20:25:41


# Channel 251

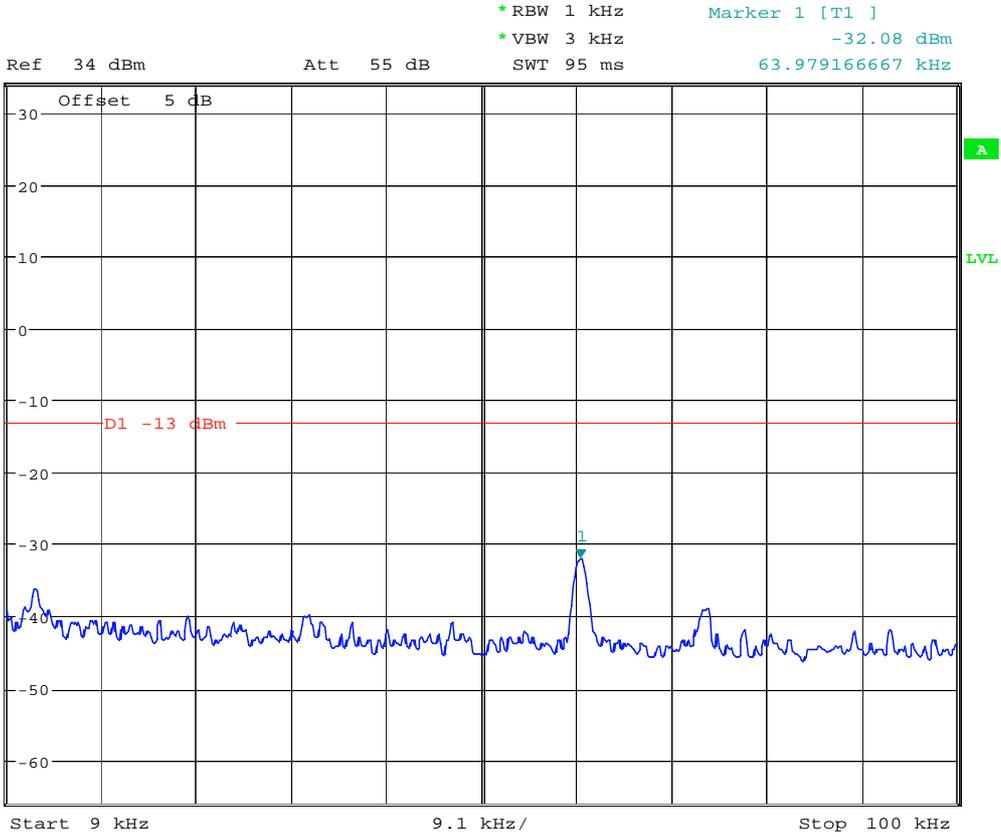


Date: 30.AUG.2007 03:43:01



Ref 34 dBm Att 55 dB \*RBW 10 kHz \*VBW 30 kHz SWT 500 ms Marker 1 [T1 ]  
-32.00 dBm  
100.00000000 kHz

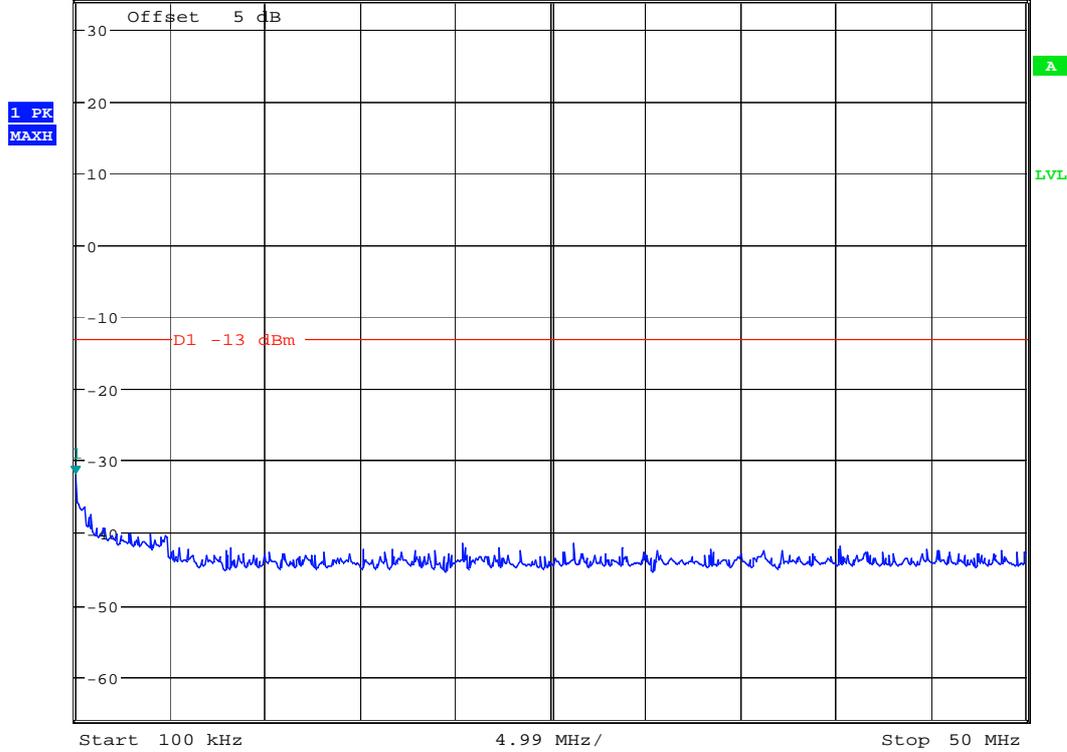

Date: 30.AUG.2007 03:46:05

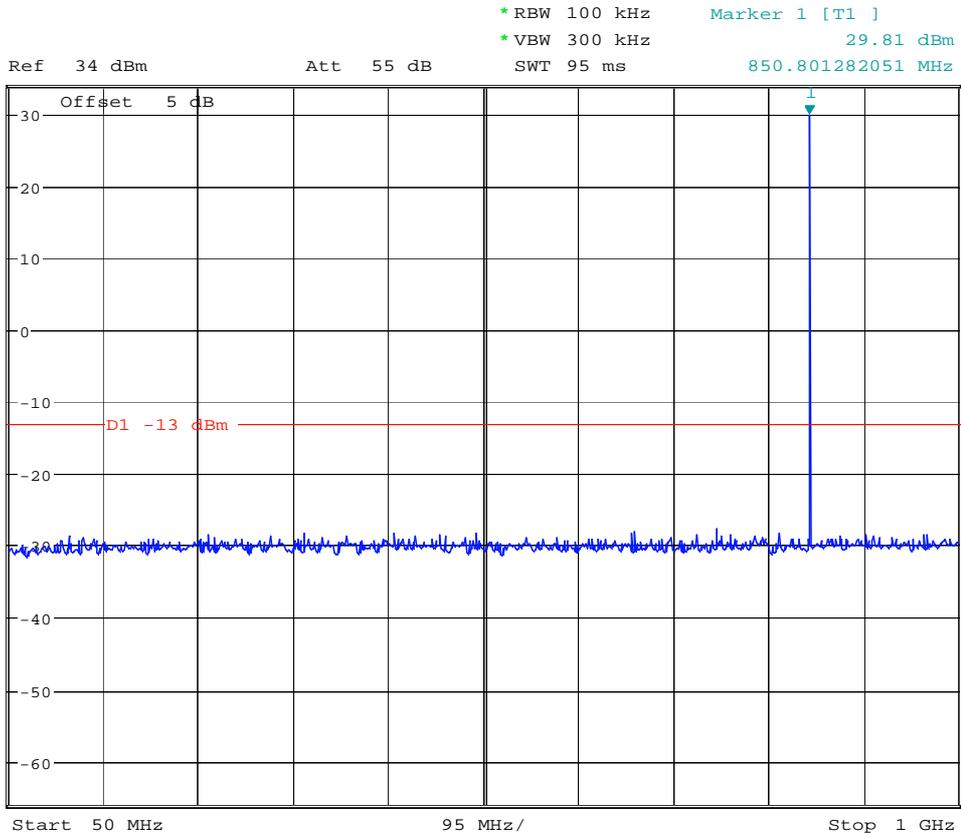


Date: 30.AUG.2007 04:52:45



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.52 dBm  
SWT 70 ms      3.485576923 GHz

Ref 34 dBm

Att 55 dB

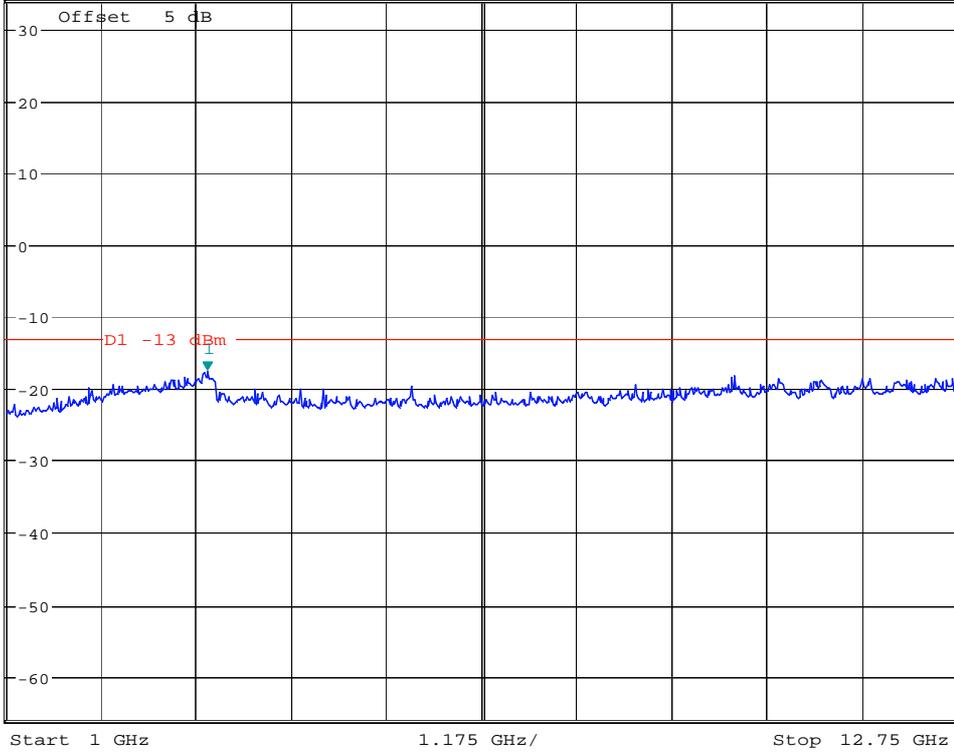

Date: 9.AUG.2007 20:26:02






\*RBW 10 kHz      Marker 1 [T1 ]  
\*VBW 30 kHz      -32.46 dBm  
SWT 500 ms      179.967948718 kHz

Ref 34 dBm

Att 55 dB

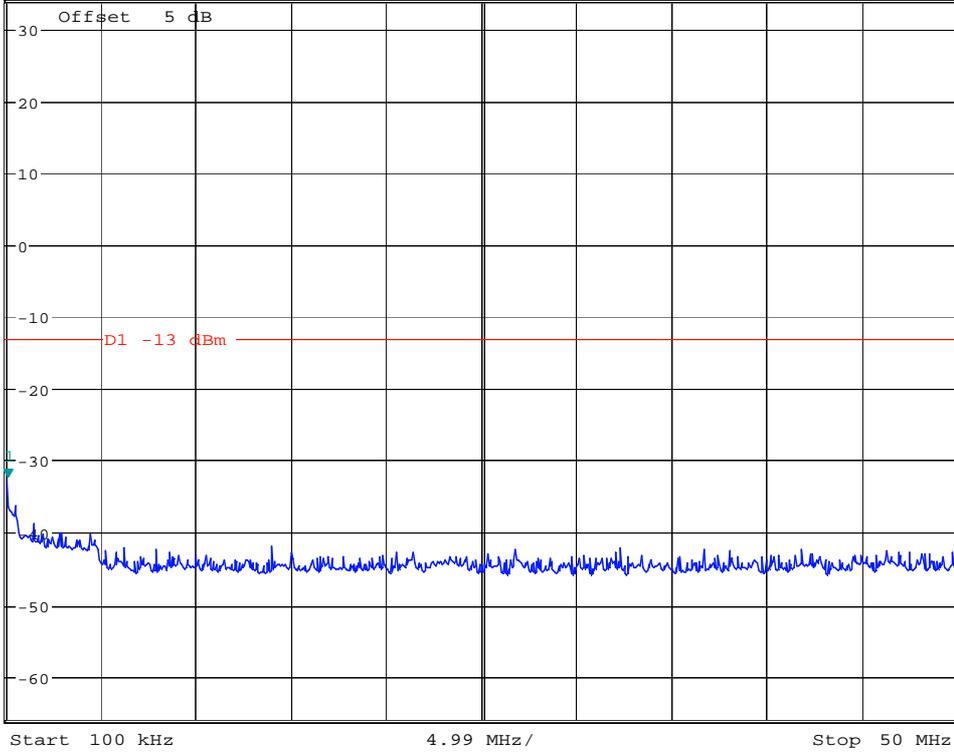


Date: 30.AUG.2007 03:59:04



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 300 kHz      17.43 dBm  
SWT 95 ms      827.964743590 MHz

Ref 34 dBm

Att 55 dB

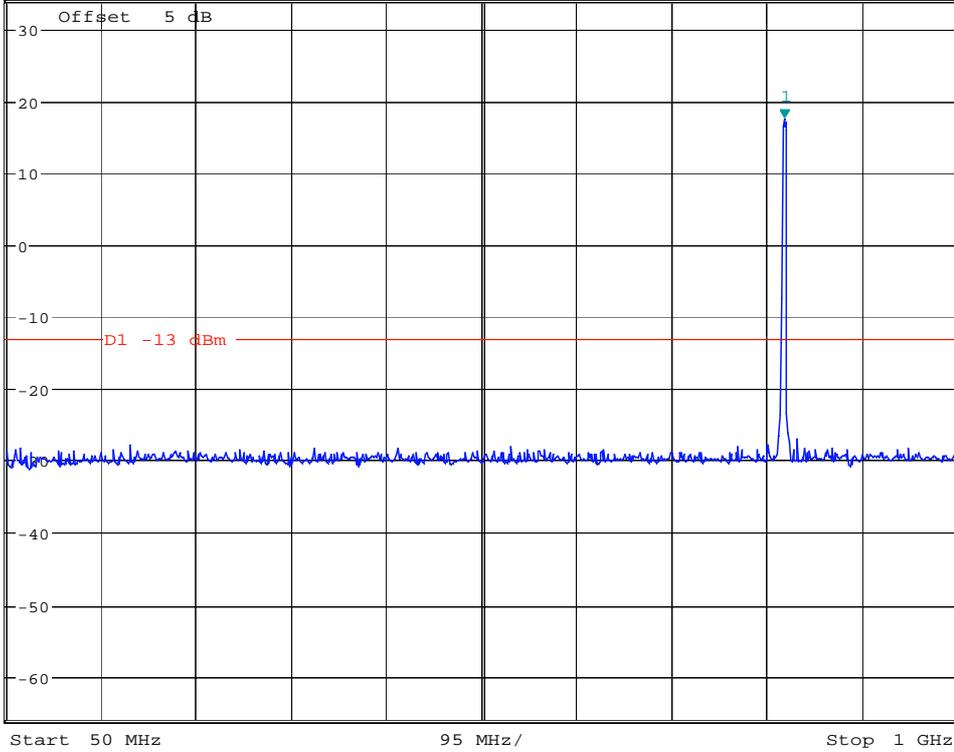


Date: 30.AUG.2007 04:00:36



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.48 dBm  
SWT 70 ms      3.504407051 GHz


Ref 34 dBm

Att 55 dB

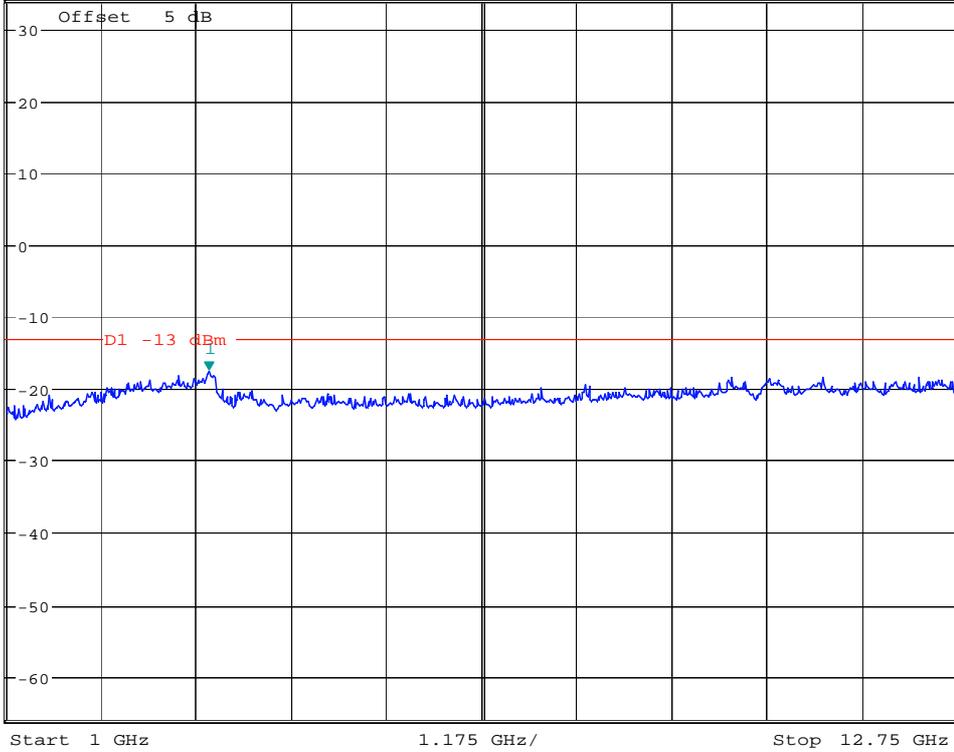

Date: 9.AUG.2007 20:29:01

# Channel 4182

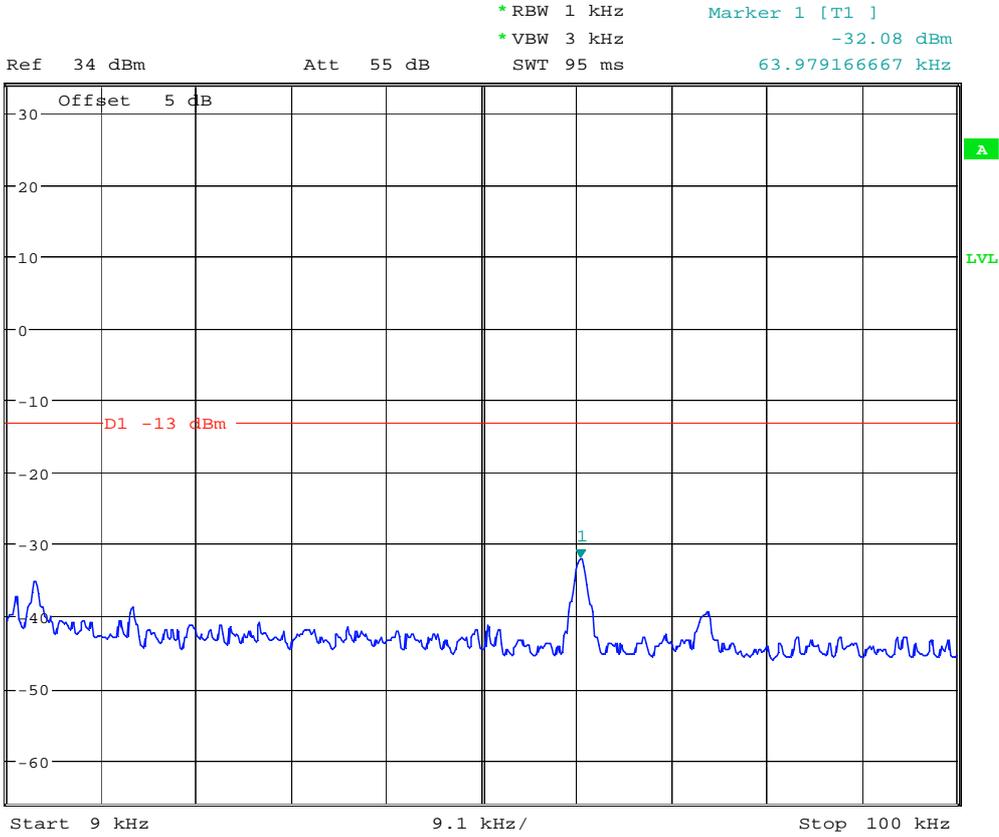

Date: 30.AUG.2007 03:57:56




Ref 34 dBm Att 55 dB \*RBW 10 kHz \*VBW 30 kHz SWT 500 ms

Marker 1 [T1 ]

-33.47 dBm

179.967948718 kHz

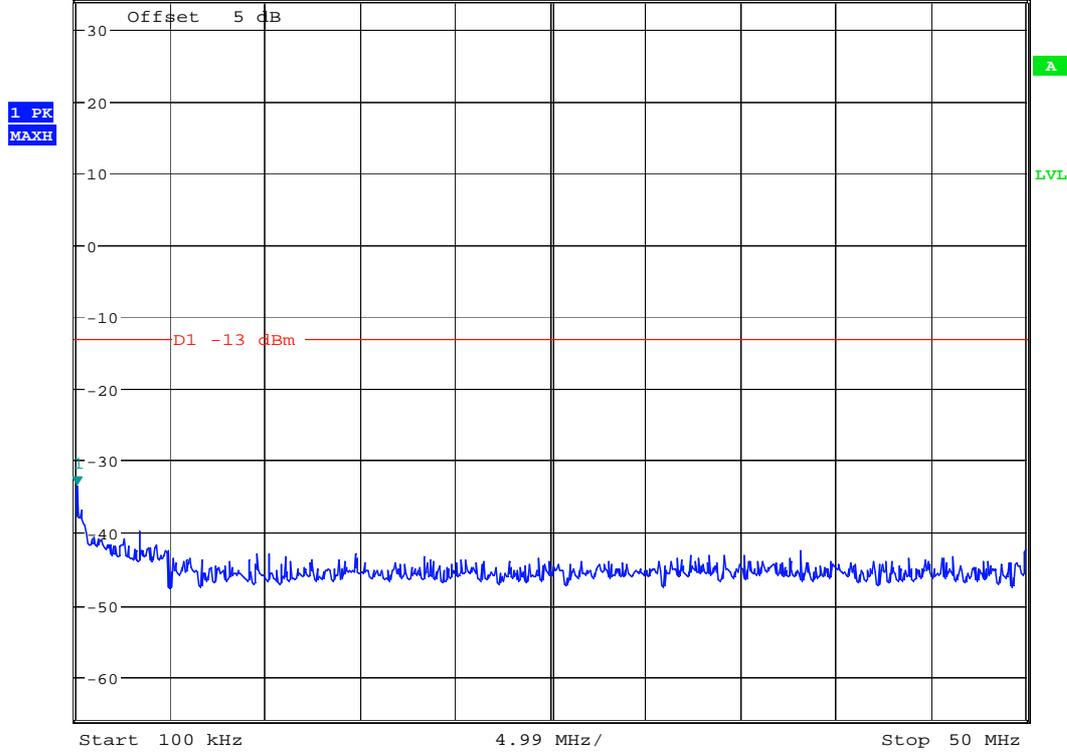

Date: 30.AUG.2007 03:59:16




Ref 34 dBm Att 55 dB \*RBW 100 kHz \*VBW 300 kHz SWT 95 ms

Marker 1 [T1 ]

17.39 dBm

838.621794872 MHz

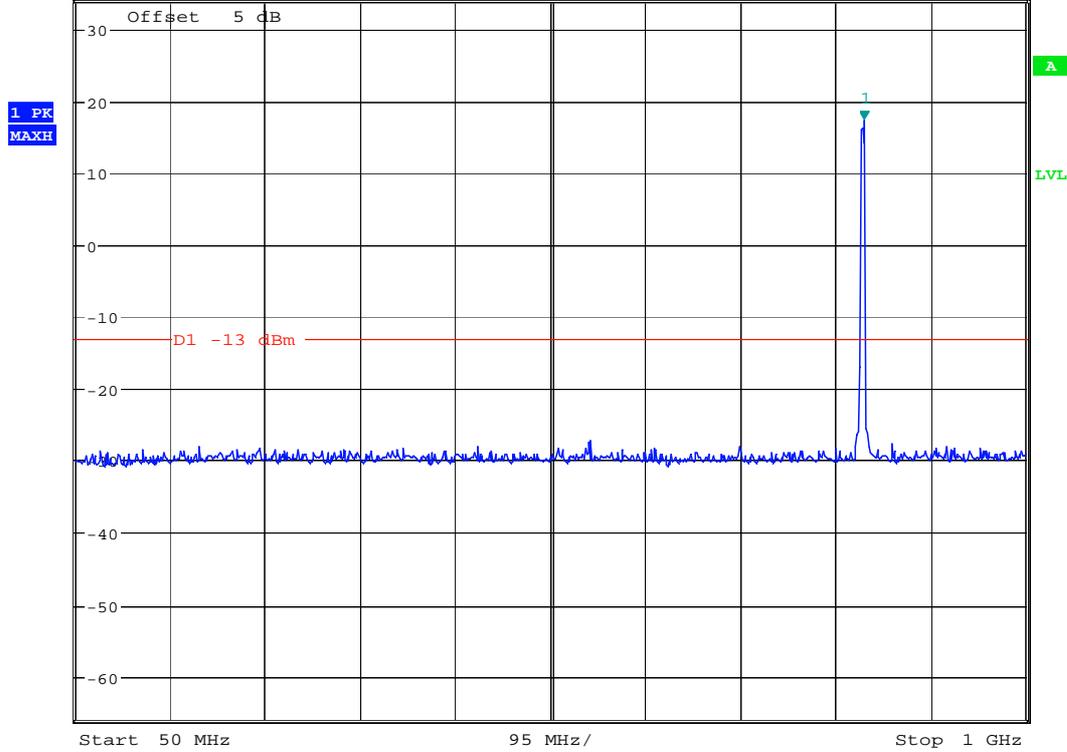


Date: 30.AUG.2007 04:57:38



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.81 dBm  
SWT 70 ms      3.466746795 GHz


Ref 34 dBm

Att 55 dB

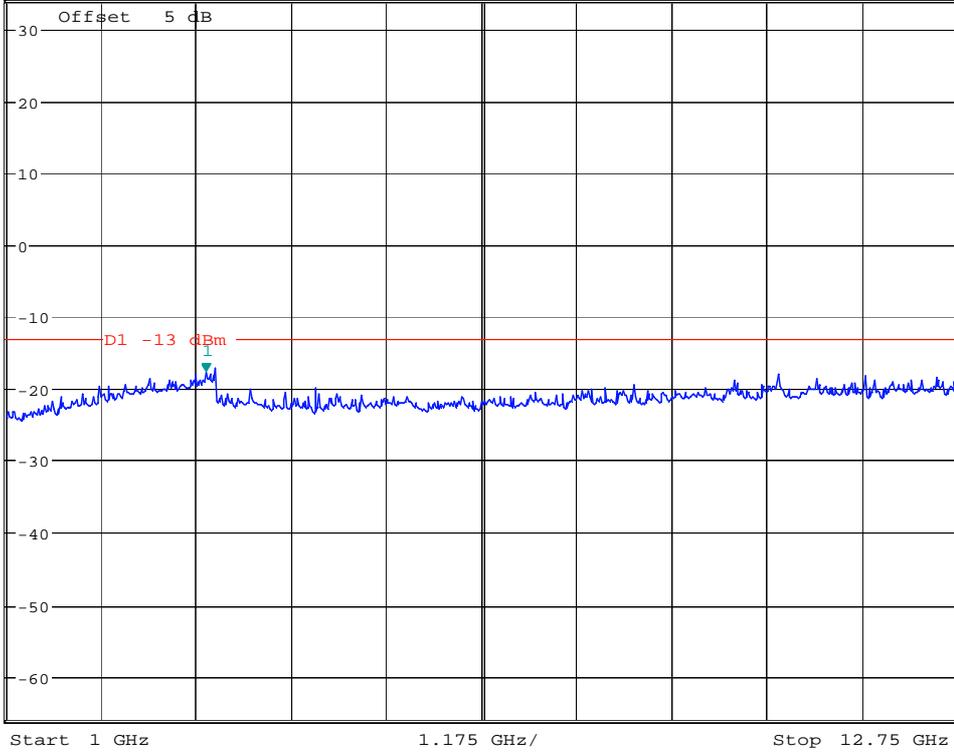

Date: 9.AUG.2007 20:29:17

# Channel 4233

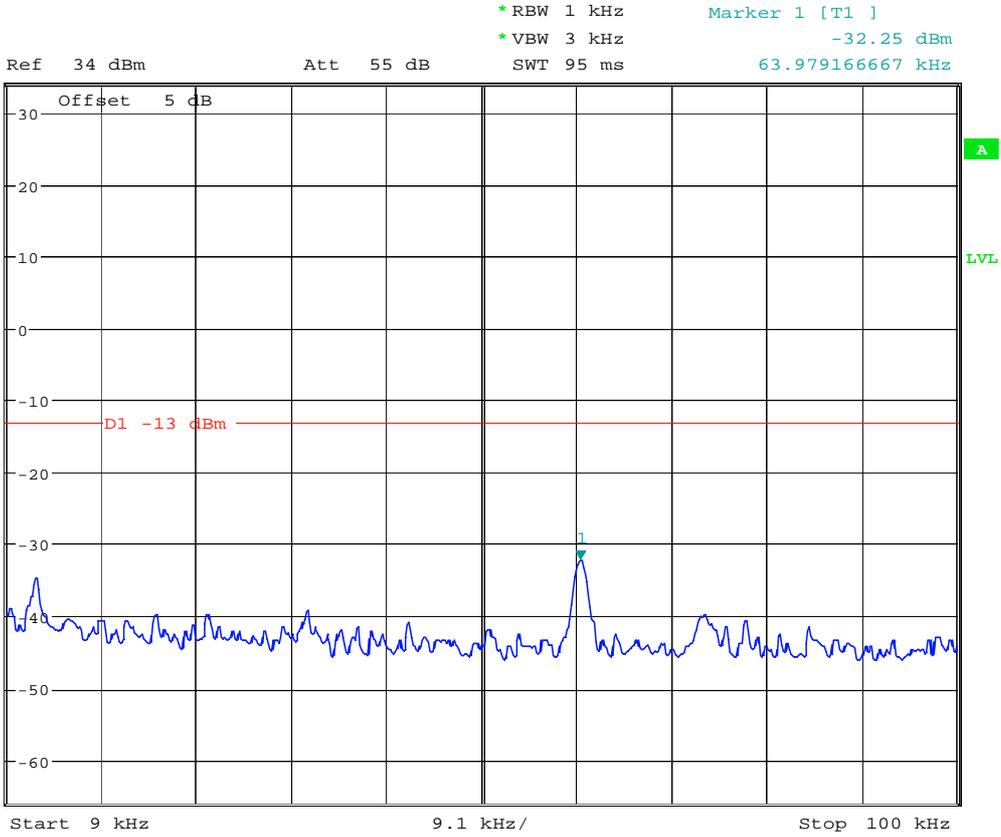


Date: 30.AUG.2007 03:58:15



\*RBW 10 kHz      Marker 1 [T1 ]  
\*VBW 30 kHz      -32.68 dBm  
SWT 500 ms      100.00000000 kHz

Ref 34 dBm

Att 55 dB

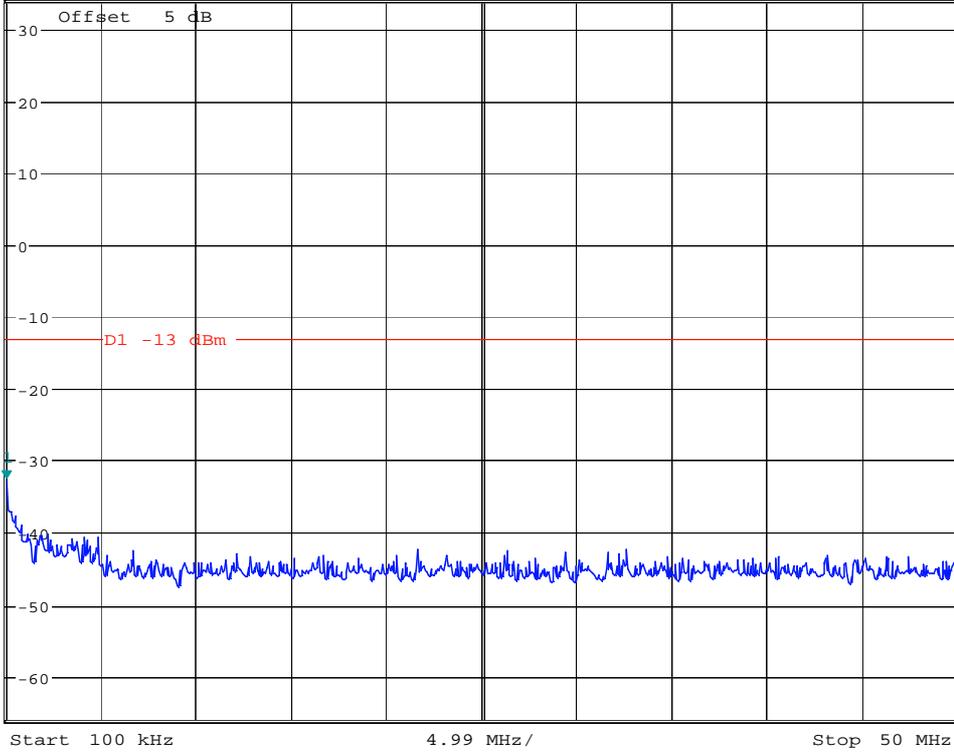


Date: 30.AUG.2007 03:59:32



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 300 kHz      17.97 dBm  
SWT 95 ms      847.756410256 MHz

Ref 34 dBm

Att 55 dB

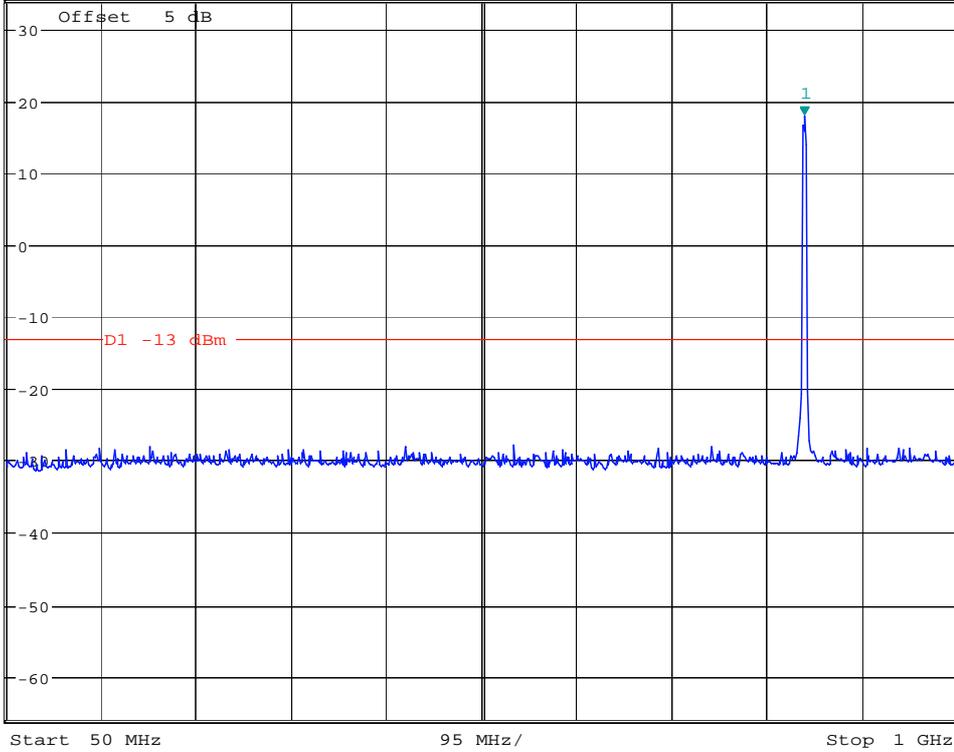


Date: 30.AUG.2007 04:58:04



\*RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 3 MHz      -17.15 dBm  
SWT 70 ms      3.429086538 GHz

Ref 34 dBm

Att 55 dB

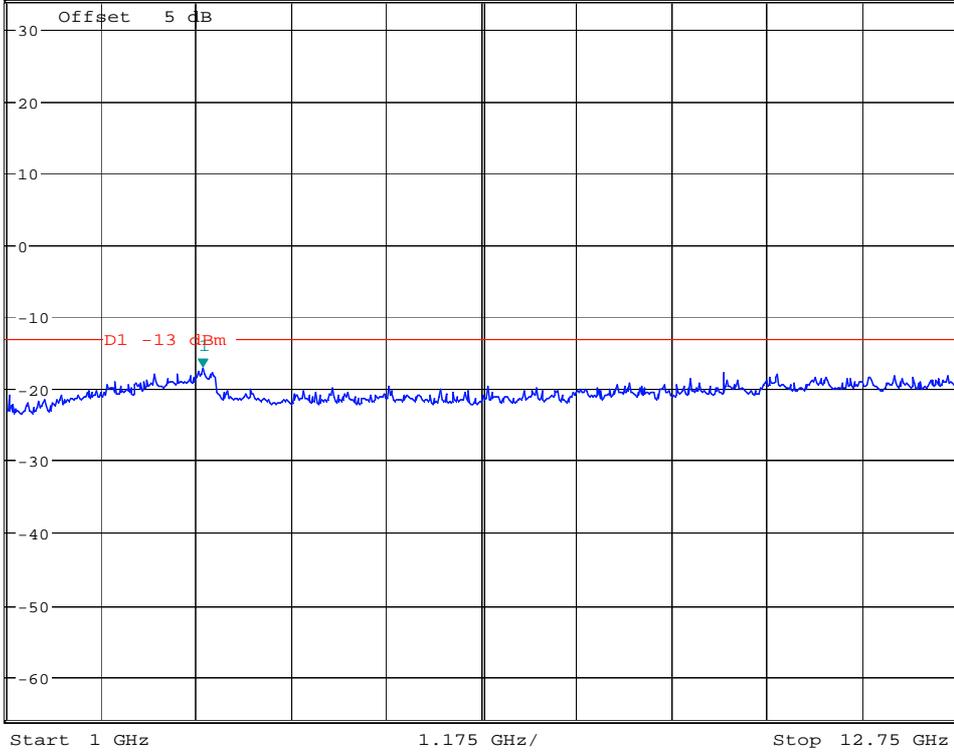

Date: 9.AUG.2007 20:30:16


## Appendix E

# Radiated Spurious Emission


According to FCC Part 2.1053 & 24.238

# 1、GPRS850


## Traffic Mode (9kHz-30MHz)

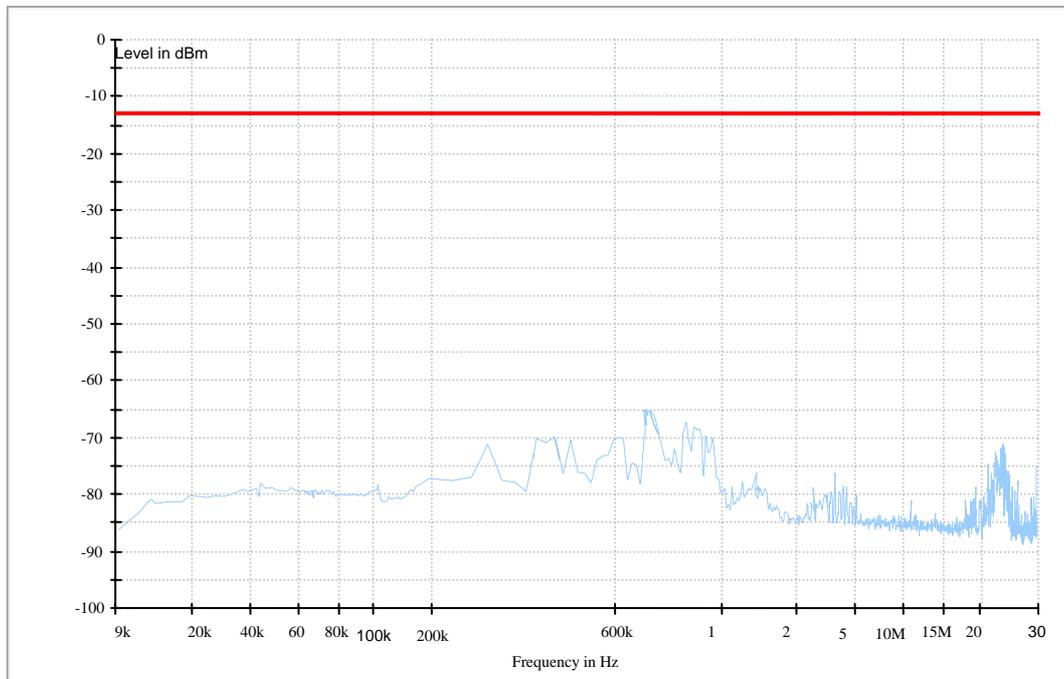


### Traffic Mode (30MHz-2GHz)

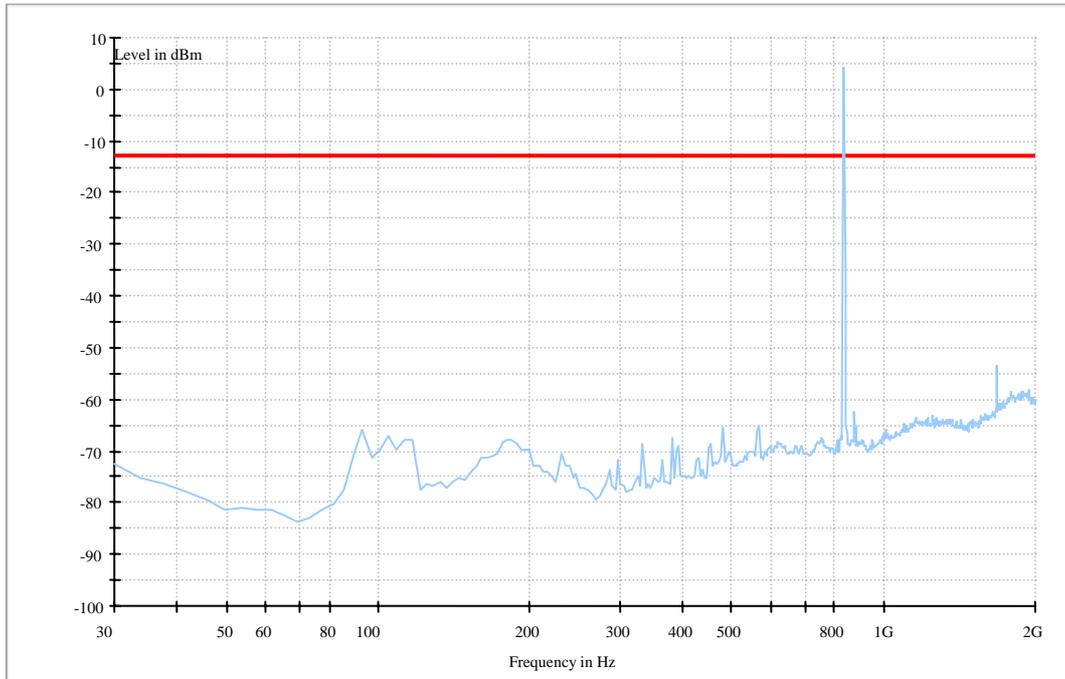


### Traffic Mode (2GHz-18GHz)

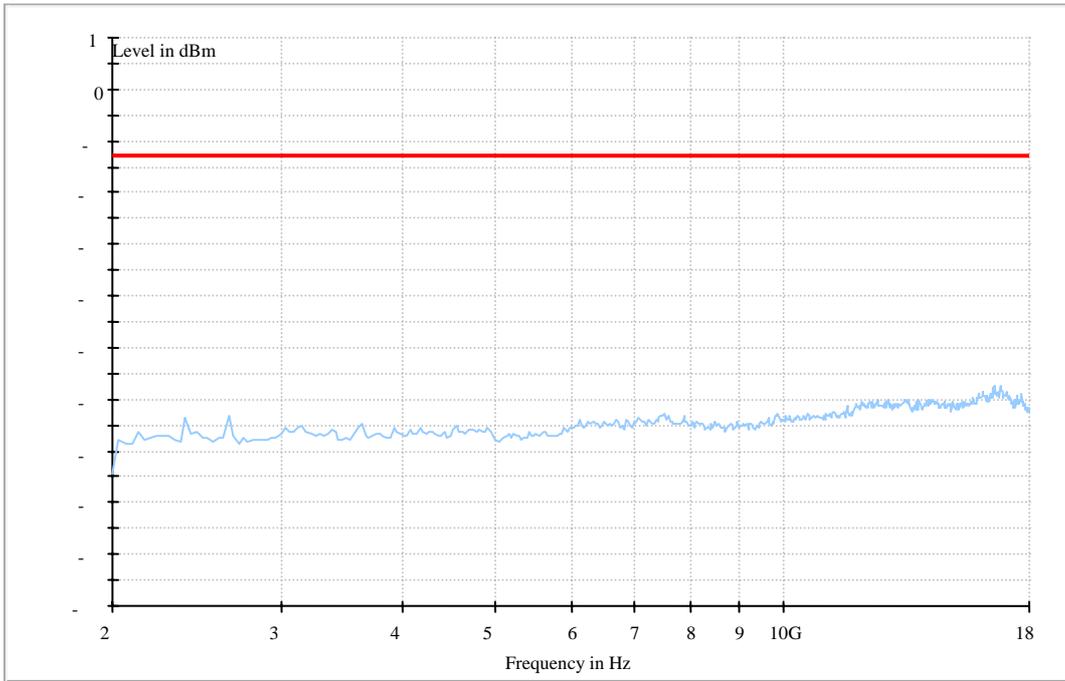


## 2、EGPRS850 Traffic Mode (9kHz-30MHz)

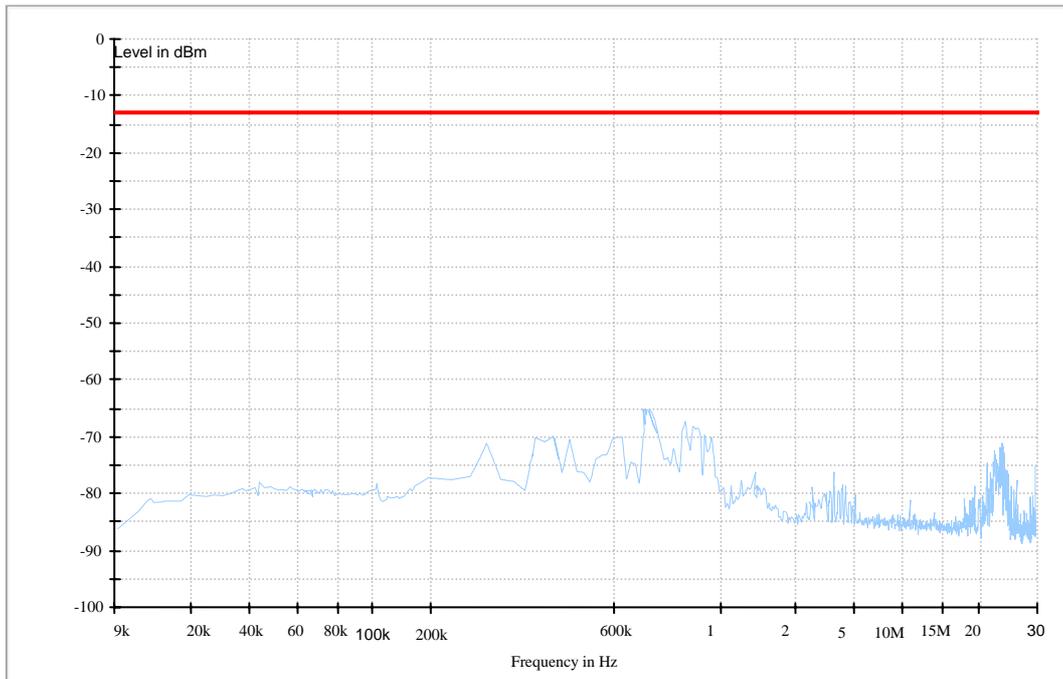


### Traffic Mode (30MHz-2GHz)

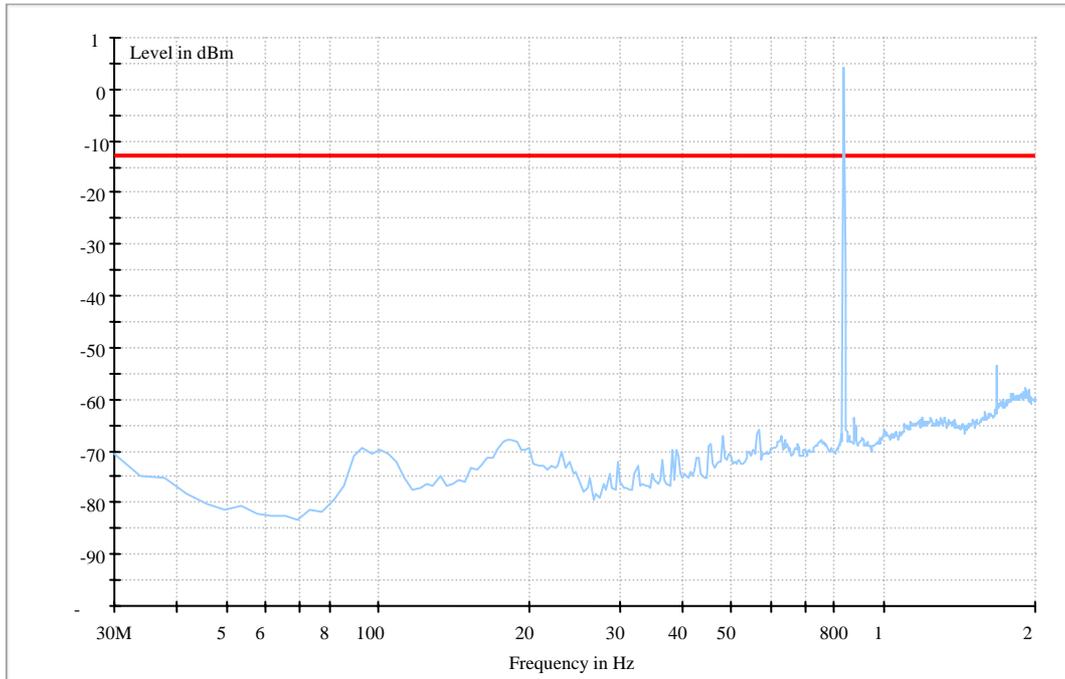


### Traffic Mode (2GHz-18GHz)

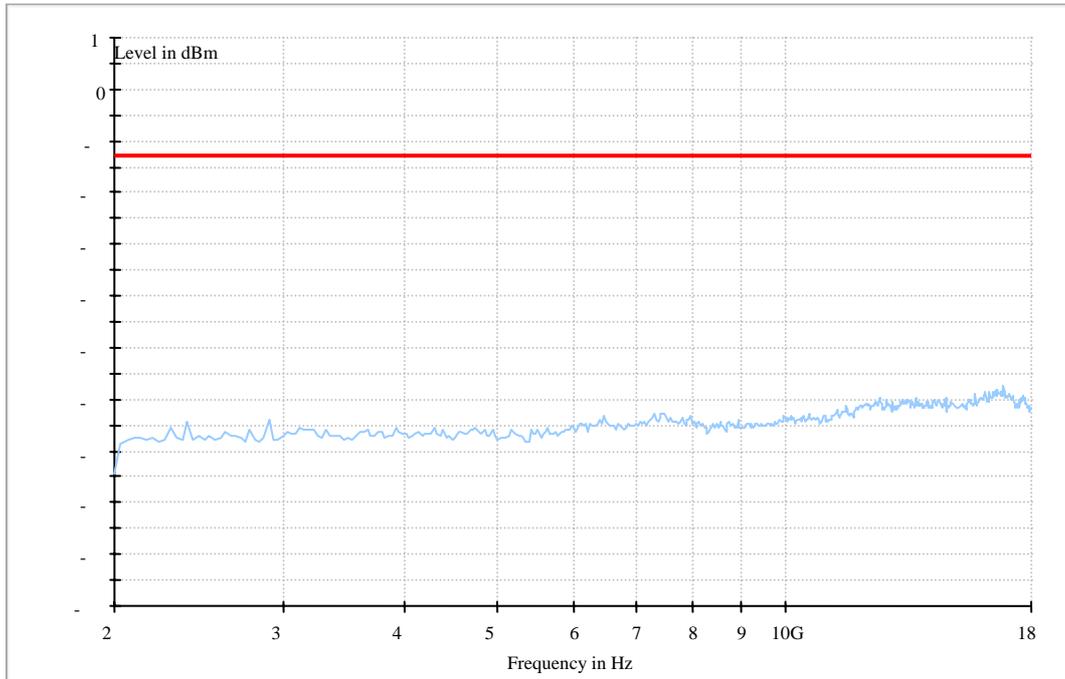


### 3、 WCDMA850 Traffic Mode (9kHz-30MHz)

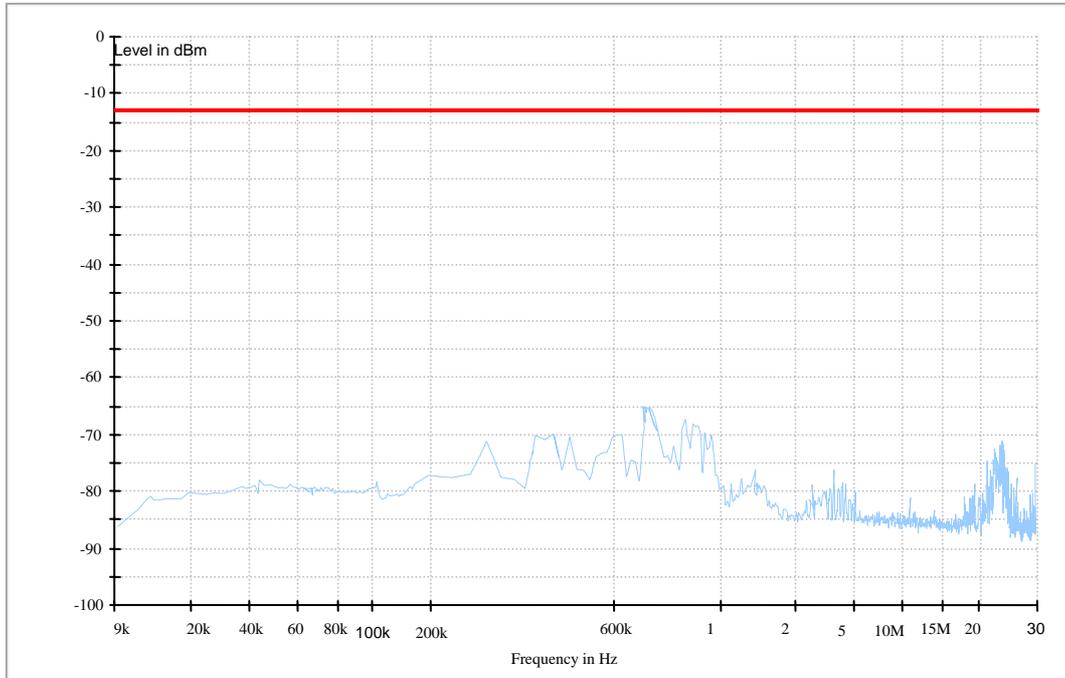

### Traffic Mode (30MHz-2GHz)

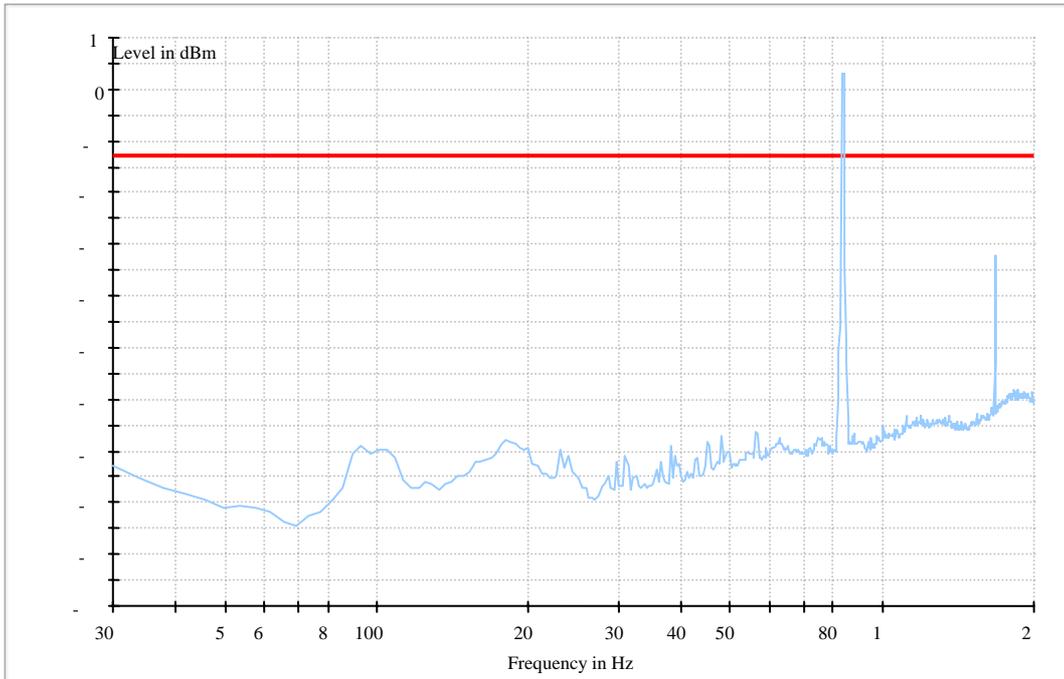


### Traffic Mode (2GHz-18GHz)

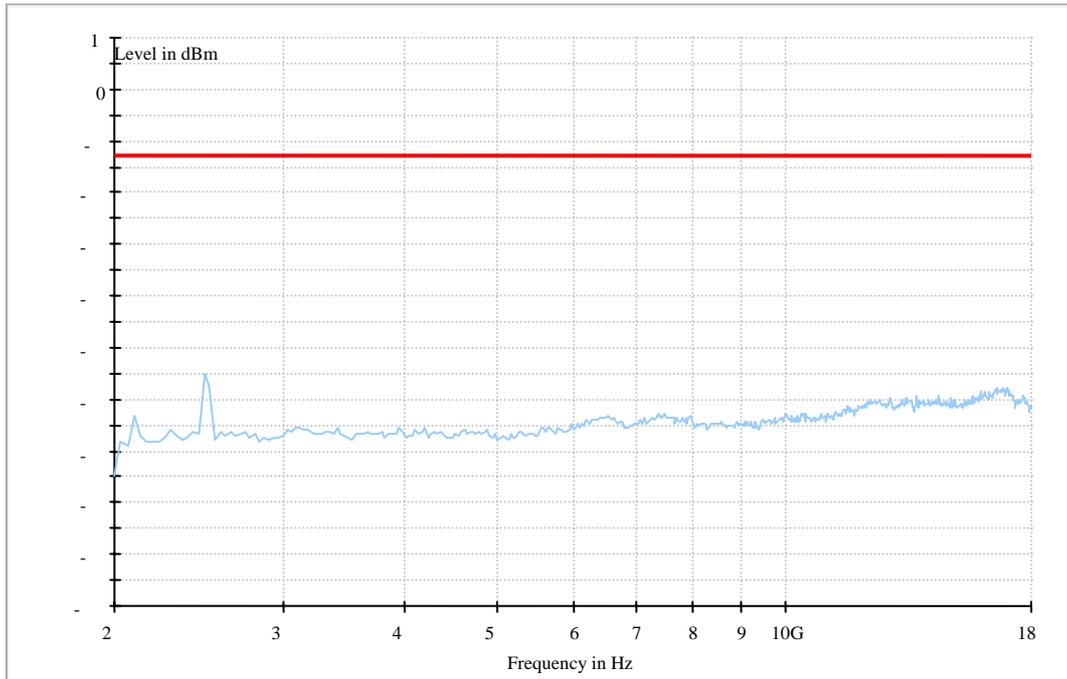

## Appendix F

# Conducted Emission at Power Port

According to FCC Part 15.107

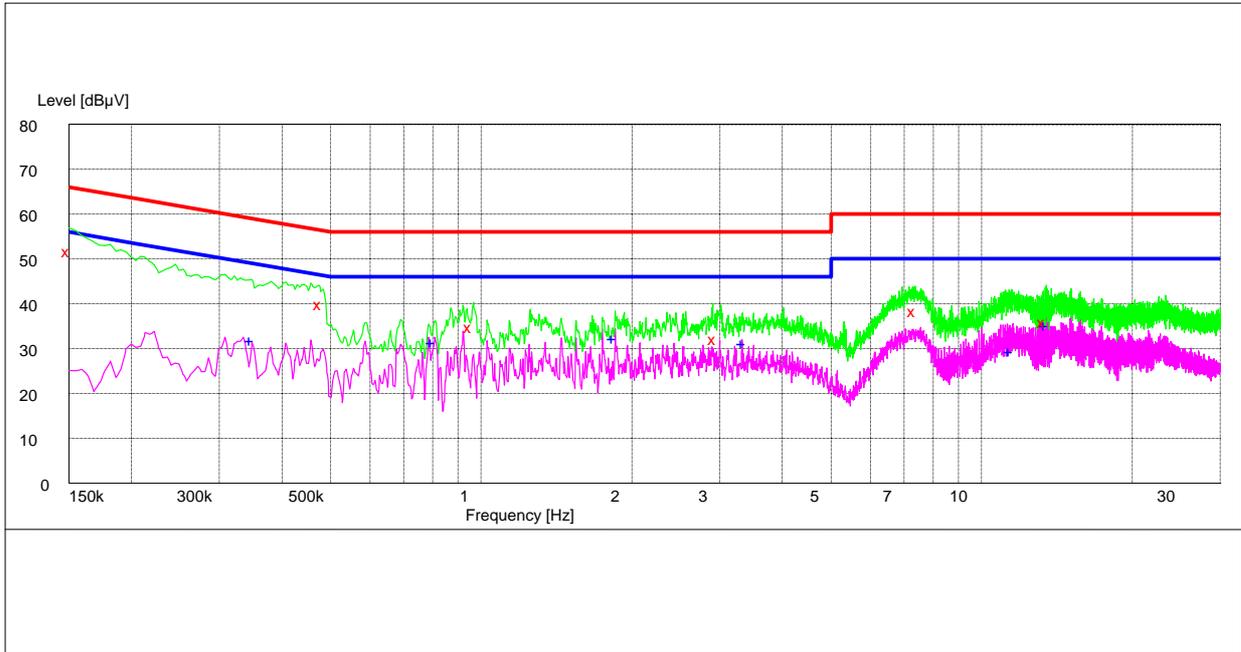

MEASUREMENT RESULT:QP DECTER

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	52.00	11.0	66	14.0	QP	L3	GND
0.478500	40.20	10.0	56	16.2	QP	L3	GND
0.955500	35.00	9.9	56	21.0	QP	L3	GND
2.940000	32.30	10.0	56	23.7	QP	N	GND
7.345500	38.70	10.3	60	21.3	QP	N	GND
13.375500	36.30	11.6	60	23.7	QP	N	GND

MEASUREMENT RESULT:AV DECTER


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.334500	35.40	10.2	49	13.9	AV	L3	GND
0.447000	37.60	10.0	47	9.3	AV	L3	GND
0.892500	32.00	9.9	46	14.0	AV	L3	GND
2.985000	28.70	10.0	46	17.3	AV	L3	GND
5.523000	27.50	10.2	50	22.5	AV	L3	GND
22.609500	18.20	15.2	50	31.8	AV	L3	GND

## Appendix F

# Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109

# 1、WCDMA850

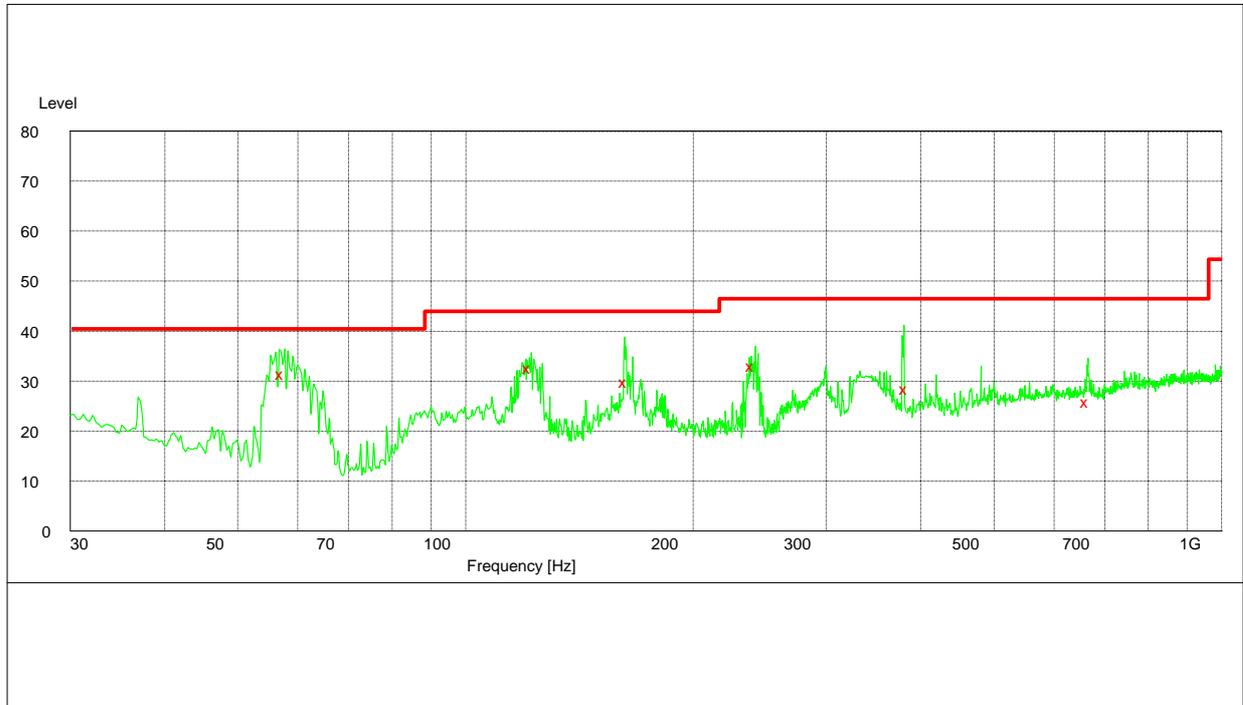

MEASUREMENT RESULT: QP DECTER

Frequency (MHz)	Level (dBμV/m)	Transd (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
57.300000	31.60	-16.0	40.0	8.4	200.0	336.00	HORIZONTAL
121.800000	33.10	-9.6	43.5	10.4	118.0	352.00	HORIZONTAL
161.460000	30.00	-11.7	43.5	13.5	195.0	31.00	HORIZONTAL
240.120000	31.60	-9.2	46.0	14.4	126.0	43.00	HORIZONTAL
377.820000	28.90	-5.2	46.0	26.1	112.0	360.00	HORIZONTAL
664.200000	26.00	-1.5	46.0	20.0	131.0	50.00	HORIZONTAL