



Appendix A. System Check Plots

Table of contents
SystemPerformanceCheck-D835-EXBody
SystemPerformanceCheck-D1900-EX-Body

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D835-EX-Body**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d126**

Communication System: CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.991$ mho/m; $\epsilon_r = 56.525$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(9.11, 9.11, 9.11); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn852; Calibrated: 11/16/2011
- Phantom: SAM3; Type: SAM; Serial: TP-1597
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/d=15mm,pin=250mW/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 2.747 mW/g


Configuration/d=15mm,pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 52.567 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.4970

SAR(1 g) = 2.33 mW/g; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.517 mW/g

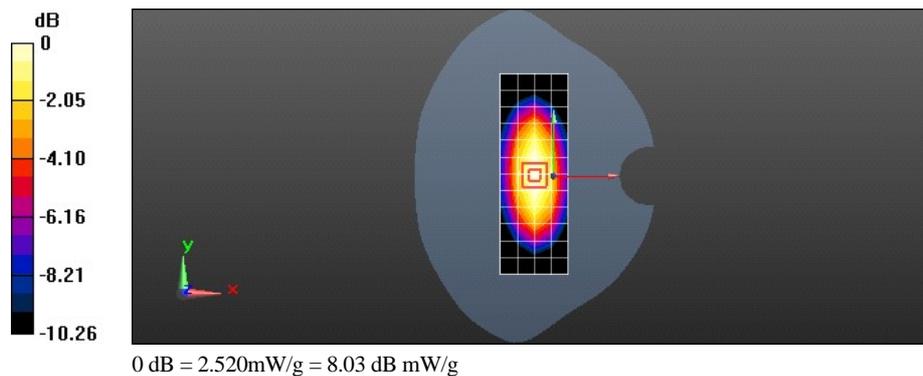

Test Laboratory: HUAWEI SAR Lab

SystemPerformanceCheck-D1900-EX-Body

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143

Communication System: CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.543$ mho/m; $\epsilon_r = 52.991$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3736; ConvF(7.26, 7.26, 7.26); Calibrated: 11/23/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1236; Calibrated: 11/11/2011
- Phantom: SAM4; Type: SAM; Serial: TP-1620
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Configuration/d=10mm, Pin=250mW/Area Scan (5x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.401 mW/g

Configuration/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 85.487 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 19.3630

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 5.2 mW/g

Maximum value of SAR (measured) = 11.449 mW/g

