

FCC RF Test Report

Product Name: Mobile WiFi

Product Model: E5220s-6

Report Number: SYBH(Z-RF)008012013-2002

FCC ID: QISE5220S-6

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Notice

1. The laboratory has Passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has Passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory has been listed by the US Federal Communications Commission to perform electromagnetic emission measurements. The site recognition number is 97456.
4. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 6369A-1 and 6369A-3.
5. The laboratory has been listed by the VCCI to perform EMC measurements. The accreditation numbers of test site No.1 are R-2364, G-415, C-2583, and T-256, and the accreditation numbers of test site No.2 are R-3760, G-485, C-4210 and T-1237.
6. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
7. The test report is invalid if there is any evidence of erasure and/or falsification.
8. The test report is only valid for the test samples.
9. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.



Applicant: Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C

Date of Receipt Sample: 2013-01-16
Start Date of Test: 2013-01-16
End Date of Test: 2013-01-21

Test Result: Pass

Approved by Senior Engineer:	2013-1-24	Dai Linjun	
	Date	Name	Signature

Prepared by:	2013-1-24	Feng Nianwei	
	Date	Name	Signature



Modification Record

No.	Last Report No.	Modification Description
		First report



CONTENT

1	General Information	6
1.1	Applied Standard	6
1.2	Test Location	6
1.3	Test Environment Condition	6
2	Test Summary	7
3	Description of the Equipment under Test (EUT)	8
3.1	General Description	8
3.2	EUT Identity	8
3.3	Technical Description	9
3.4	Test Modes	10
3.5	EUT Configurations	11
3.6	Test Environments	12
3.7	Test Setups	13
3.8	Test Conditions	16
4	Main Test Instruments	18



1 General Information

1.1 Applied Standard

Applied Rules: 47 CFR FCC Part 2, Subpart J (2011-10-1 Edition)
47 CFR FCC Part 15, Subpart C (2011-10-1 Edition)

Test Method: FCC KDB 558074 D01 DTS Meas Guidance v01
FCC KDB 662911 D01 Multiple Transmitter Output v01

1.2 Test Location

Test Location 1: Reliability Laboratory of Huawei Technologies Co., Ltd.
Address: Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.3 Test Environment Condition

Ambient Temperature: 19.5to 25 °C
Ambient Relative Humidity: 40 to 55 %
Atmospheric Pressure: Not applicable

2 Test Summary

Test Item	FCC Part No.	Requirements	Test Result	Verdict
DTS (6 dB) Bandwidth	15.247(a)(2)	≥ 500 kHz.	Appendix A	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	For directional gain: < 30 dBm – (G[dBi] – 6 [dB]), peak; Otherwise: < 30 dBm, peak.	Appendix B	Pass
Maximum Power Spectral Density Level	15.247(e)	For directional gain: < 8 dBm/3 kHz – (G[dBi] – 6 [dB]), peak. Otherwise: < 8 dBm/3 kHz, peak.	Appendix C	Pass
Band Edges Compliance	15.247(d)	< -20 dBc/100 kHz if total peak power ≤ power limit.	Appendix D	
Unwanted Emissions into Non-Restricted Frequency Bands			Appendix E	Pass
Radiated Spurious Emission & Spurious in Restricted Band	15.247(d) 15.209	FCC Part 15.209 field strength limit;	Appendix F	Pass
AC Power Line Conducted Emissions	15.207	FCC Part 15.207 conducted limit;	Appendix G	Pass
<p>NOTE : According to KDB 558074, antenna-port conducted measurements are acceptable as an alternative to radiated measurements for demonstrating compliance to the limits in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case emissions will also be required.</p>				

3 Description of the Equipment under Test (EUT)

3.1 General Description

E5220s-6 HSPA+/2100M/1900M/850M/EDGE Quad Band is subscriber equipment in the UMTS/GSM system. E5220s-6 implement such functions as RF signal receiving/ transmitting, HSPA+/WCDMA protocol processing, data service etc, and it can act as a Wi-Fi hotspot for user accessing to internet. Externally it provides USB interface (to connect to the notebook etc.), SIM card interface E5220s-6 has 3 internal antennas as default Wi-Fi, diversity, and main antenna

3.2 EUT Identity

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

3.2.1 Board

Board		
Hardware V	software version	Description
CH1E5220SM	21.143.03.00.00	Main Board

3.2.2 Adapter

AC/DCAdapter Model	HW-050100U1W
Manufacturer	Huawei Technologies Co., Ltd.
Input Voltage	~100-240V 50/60Hz 0.2A
Output Voltage	5V  1.0A
Rated Power	3.5W

3.2.3 Battery

Name	Qty.	Manufacture	Description
Li-ion Battery	1	Huawei Technologies Co., Ltd.	Battery Model: HB5A2H Rated capacity: 1150mAh Nominal Voltage:  +3.7V Charging Voltage:  +4.2V



3.2.4 USB Cable

Name	Qty	Manufacture	Description
USB Cable	1	HUAWEI	Terminal Accessory, Data Cable, USB A male to Micro USB 17cm,White,Terminal Dedicated

3.3 Technical Description

Characteristics	Description		
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b (20 MHz channel bandwidth), <input checked="" type="checkbox"/> 802.11g (20 MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n (20 MHz channel bandwidth)		
TX/RX Operating Range	2412-2462 MHz band	$f_c = 2407 \text{ MHz} + N * 5 \text{ MHz}$, where: - f_c = "Operating Frequency" in MHz, - N = "Channel Number" with the range from 1 to 11 for the 20 MHz channel bandwidth	
Data Rate	802.11b	1 Mbps, 2 Mbps, 5.5 Mbps, 11 Mbps	
	802.11g	6 Mbps, 9 Mbps, 12 Mbps, 18 Mbps, 24 Mbps, 36 Mbps, 48 Mbps, 54 Mbps	
	802.11n (SISO)	MCS 0 to MCS 7	
Modulation Type	DBPSK/DQPSK/CCK (DSSS), BPSK/QPSK/16QAM/64QAM (OFDM).		
Emission Designator	8M8G1D (for 802.11b mode), 16M4G7D (for 802.11g mod), 15M7G7D (for 802.11n mode)		
TX Power Control	<input checked="" type="checkbox"/> Supported, <input type="checkbox"/> Not Supported		
Standby Mode	<input type="checkbox"/> Supported, <input checked="" type="checkbox"/> Not Supported		
Equipment Type	<input type="checkbox"/> Stand-alone equipment, <input type="checkbox"/> Plug-in radio device, <input checked="" type="checkbox"/> Combined equipment		
Antenna	Description	Isotropic Antenna	
	Type	<input type="checkbox"/> External, <input checked="" type="checkbox"/> Integrated	
	Ports	<input checked="" type="checkbox"/> Ant 1, <input type="checkbox"/> Ant 2, <input type="checkbox"/> Ant 3	
	Smart System	<input checked="" type="checkbox"/> SISO (for 802.11b/g/n), <input type="checkbox"/> MIMO (for 802.11n): 2 Tx & 2 Rx, <input type="checkbox"/> Diversity (for 802.11b/g) : Tx & Rx	
	Gain	0.5 dBi (per antenna port, max.)	
	Remark	When the EUT is put into service, the practical maximum antenna gain should NOT exceed the value as described above.	
Power Supply	Type	<input checked="" type="checkbox"/> AC/DC Adapter	<input type="checkbox"/> PoE: <input type="checkbox"/> Other:



3.4 Test Modes

NOTE: Typical working modes for each IEEE 802.11 mode are selected to perform tests.

Test Mode	Test Modes Description
11B	IEEE 802.11b with data rate of 11 Mbps using SISO mode.
11G	IEEE 802.11g with data rate of 54 Mbps using SISO mode.
11N20	IEEE 802.11n with data rate of MCS7 and bandwidth of 20 MHz using SISO mode.

3.5 EUT Configurations

3.5.1 General Configurations

Configuration	Description
Test Antenna Ports	Until otherwise specified, <ul style="list-style-type: none"> - All TX tests are performed at all TX antenna ports of the EUT, and - All RX tests are performed at all RX antenna ports of the EUT.
Multiple RF Sources	Other than the tested RF source of the EUT, other RF source(s) are disabled or shutdown during measurements.

3.5.2 Customized Configurations

Test Mode	RF Ch.	Antenna Port	TX Freq. [MHz]	RX Freq. [MHz]	Ch. BW [MHz]	Power Conf., per Port	Duty Cycle
11B	B	Ant 1	Ch No. 1 / 2412 MHz	---	20	14	0.93
11B	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	14	0.93
11B	T	Ant 1	Ch No. 11 / 2462 MHz	---	20	14	0.93
11G	B	Ant 1	Ch No. 1 / 2412 MHz	---	20	11	0.70
11G	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	11	0.70
11G	T	Ant 1	Ch No. 11 / 2462 MHz	---	20	11	0.70
11N20	B	Ant 1	Ch No. 1 / 2412 MHz	---	20	9	0.68
11N20	M	Ant 1	Ch No. 6 / 2437 MHz	---	20	9	0.68
11N20	T	Ant 1	Ch No. 11 / 2462 MHz	---	20	9	0.68



3.6 Test Environments


NOTE: The values used in the test report may be stringent than the declared.

Environment Parameter	Selected Values During Tests		
	Temperature	Voltage	Relative Humidity
NTNV	Ambient	3.7 VDC	Ambient

3.7 Test Setups

3.7.1 Test Setup 1


The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.

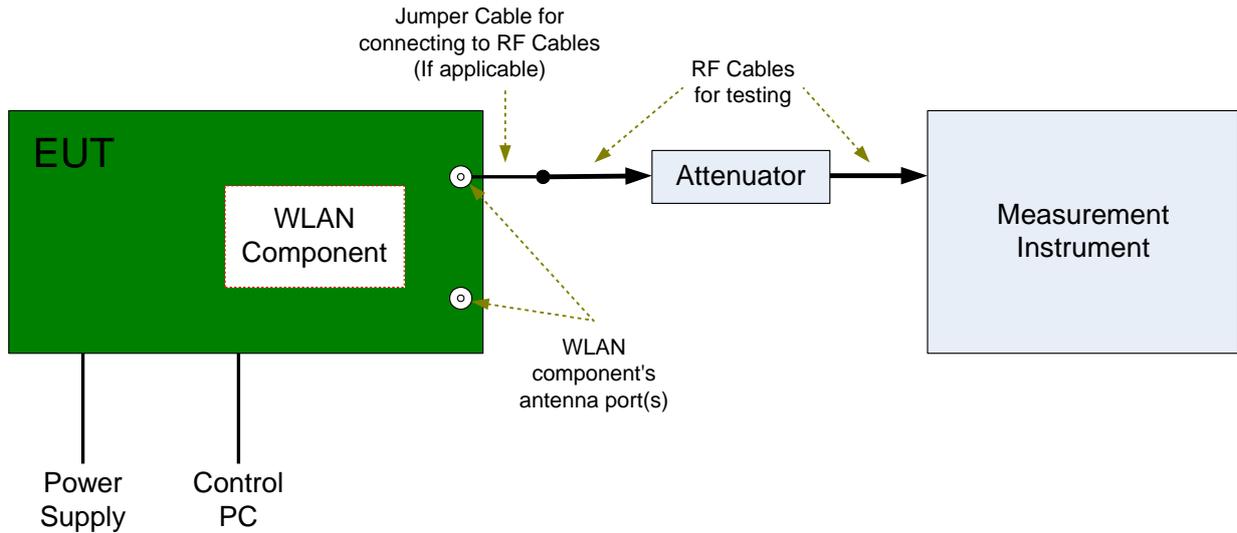


3.7.2 Test Setup 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.4. The test distance is 3m. The setup is according to ANSI C63.4 and CAN/CSA-CEI/IEC CISPR 22.

The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

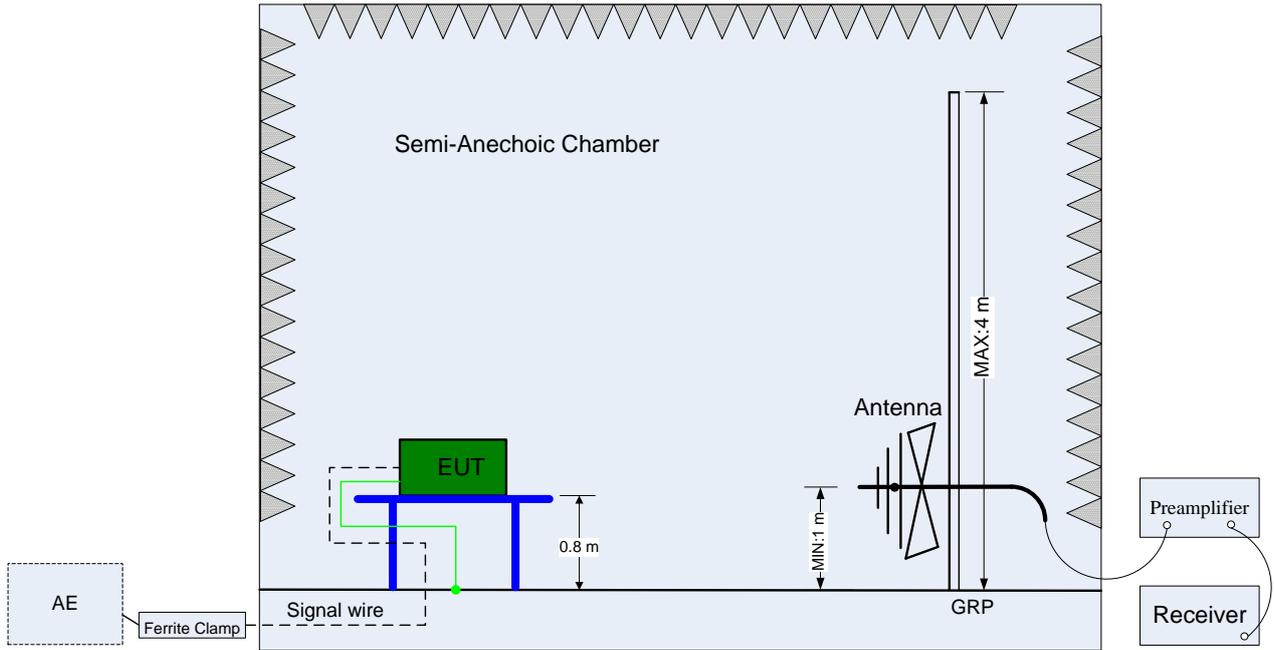

(Below 1 GHz)

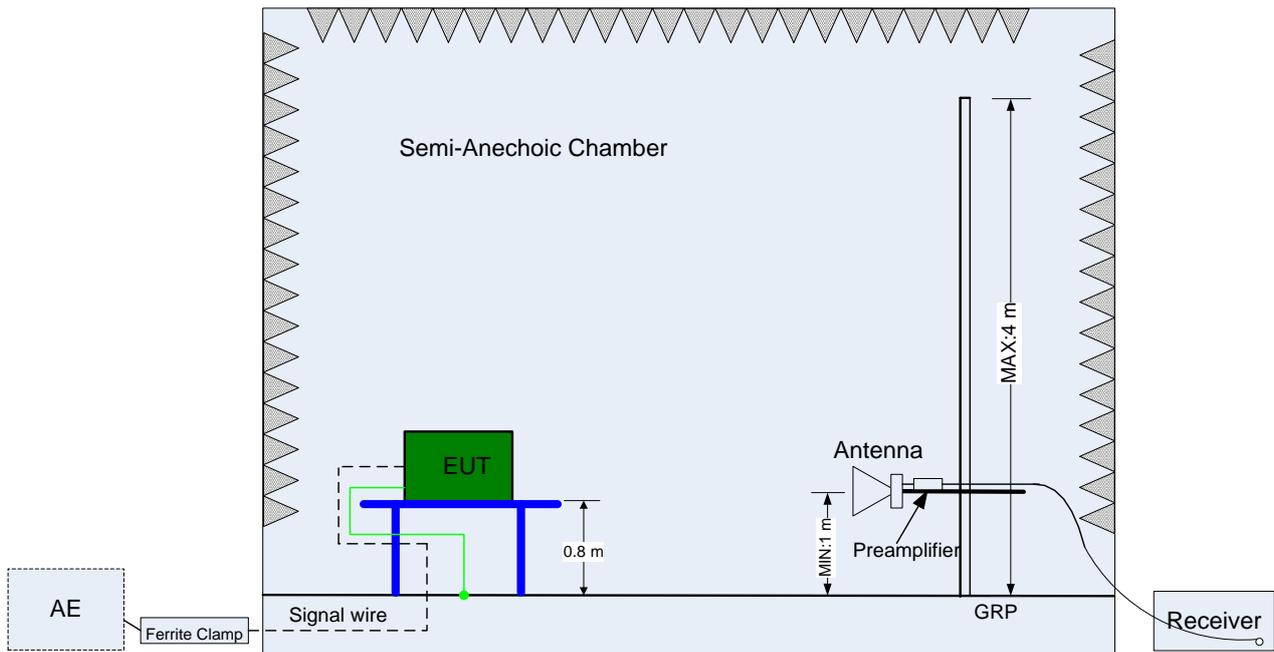

(Above 1 GHz)

3.8 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
DTS (6 dB) Bandwidth	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Maximum Peak Conducted Output Power	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Maximum Power Spectral Density Level	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Band Edges Compliance	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_T 11G_B, 11G_T 11N20_B, 11 N20_T
Unwanted Emissions into Non-Restricted Frequency Bands	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Unwanted Emissions into Restricted Frequency Bands (Conducted)	Test Environment	NTNV
	Test Setup	Test Setup 1
	EUT Configuration	11B_B, 11B_M, 11B_T 11G_B, 11G_M, 11G_T 11N20_B, 11 N20_M, 11 N20_T
Unwanted Emissions into Restricted Frequency Bands (Radiated)	Test Environment	NTNV
	Test Setup	Test Setup 2
	EUT Placement	<input checked="" type="checkbox"/> Flatwise, <input type="checkbox"/> Upright, <input type="checkbox"/> Hung
	EUT Configuration	(1) 30 MHz to 1 GHz: 11B_B (Worst Conf.). (2) 1 GHz to 3 GHz: 11B_B, 11B_T 11G_B, 11G_T



Test Case	Test Conditions	
	Configuration	Description
		11N20_B, 11 N20_T (3) 3 GHz to 18 GHz: 11B_B (Worse Conf.), 11B_T (Worse Conf.). (4) 18 GHz to 26.5 GHz: 11B_B (Worse Conf.), 11B_T (Worse Conf.).
AC Power Line	Test Environment	NTNV
Conducted	Test Setup	Test Setup 3
Emissions	EUT Configuration	11B_B (Worst Conf.).



4 Main Test Instruments

Equipment Name	Manufacturer	Model	Serial Number	Cal Date	Cal. Due
Power supply	KEITHLEY	2303	1288003	2012-11-09	2013-11-08
Spectrum Analyzer	Agilent	E4440A	MY48250119	2012-07-18	2013-07-17
Signal Analyzer	R&S	FSQ31	200021	2012-11-09	2013-11-08
Spectrum Analyzer	Agilent	N9030A	MY49431698	2012-11-09	2013-11-08
Temperature Chamber	WEISS	WKL64	24600294	2012-02-14	2013-02-13
Signal generator	Agilent	E8257D	MY49281095	2012-07-10	2013-07-09
Spectrum analyzer	R&S	FSU3	200474	2012-03-06	2013-03-05
Spectrum analyzer	R&S	FSU43	100144	2012-04-06	2013-04-05
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	2012-04-06	2013-04-05
Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100391	2012-07-18	2013-07-17
Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-521	2012-02-28	2013-02-27
Pyramidal Horn Antenna(26GHz-40GHz)	ETS-Lindgren	3160-10	00123940	2012-02-28	2013-02-27
Pyramidal Horn Antenna(18GHz-26.5GHz)	ETS-Lindgren	3160-09	00125912	2012-02-28	2013-02-27
EMI Test receiver	R&S	ESCI	101163	2012-03-06	2013-03-05
Artificial Mains Network	R&S	ENV216	100382	2012-03-22	2013-03-21
LOOP Antennas(9kHz-30MHz)	R&S	HFH2-Z2	100263	2012-3-11	2013-3-10

END



Appendix for Test report



CONTENT

Appendix for Test report.....	1
Appendix A: DTS (6 dB) Bandwidth.....	3
1 Result Table.....	4
2 Test Plots.....	5
Appendix B: Maximum Peak Conducted Output Power.....	14
1 Result Table.....	15
2 Test Plots.....	16
Appendix C: Maximum Power Spectral Density Level	25
1 Result Table.....	26
2 Test Plot.....	27
Appendix D: Band Edges Compliance	36
1 Result Table.....	37
2 Test Plot.....	38
Appendix E: Unwanted Emissions into Non-Restricted Frequency Bands	44
1 Result Table.....	45
2 Test Plot.....	46
Appendix E: Radiated Spurious Emission & Spurious in Restricted Band.....	109
Part 1: Testing Range of “30 MHz to 1 GHz”	110
Part 2: Testing Range of “18 GHz to 26.5 GHz”	111
Part 3: Testing Range of “1GHz to 3GHz”	112
Part 4: Testing Range of “1 GHz to 18 GHz”	118
Appendix H: AC Power Line Conducted Emissions	119



Appendix A: DTS (6 dB) Bandwidth



In this document, the “DTS6dBBW” refers to the measured “DTS (6 dB) Bandwidth” value. In this Appendix, the “fc(DTS6dBBW)” refers to the centre of the measured “DTS6dBBW”. The introduction of the “fc(DTS6dBBW)” is due to that other measurements use it as the spectrum analyzer setting.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain, and used as respective results for each chain.


1 Result Table

EUT Conf.	Channel	Fc [MHz]	DTS6dBBW [MHz]	Verdict
11B	B	2412	7.180	pass
11B	M	2437	7.918	pass
11B	T	2462	7.908	pass
11G	B	2412	15.826	pass
11G	M	2437	16.392	pass
11G	T	2462	16.276	pass
11N20	B	2412	15.430	pass
11N20	M	2437	16.603	pass
11N20	T	2462	16.166	pass




2 Test Plots

2.1 11B_B

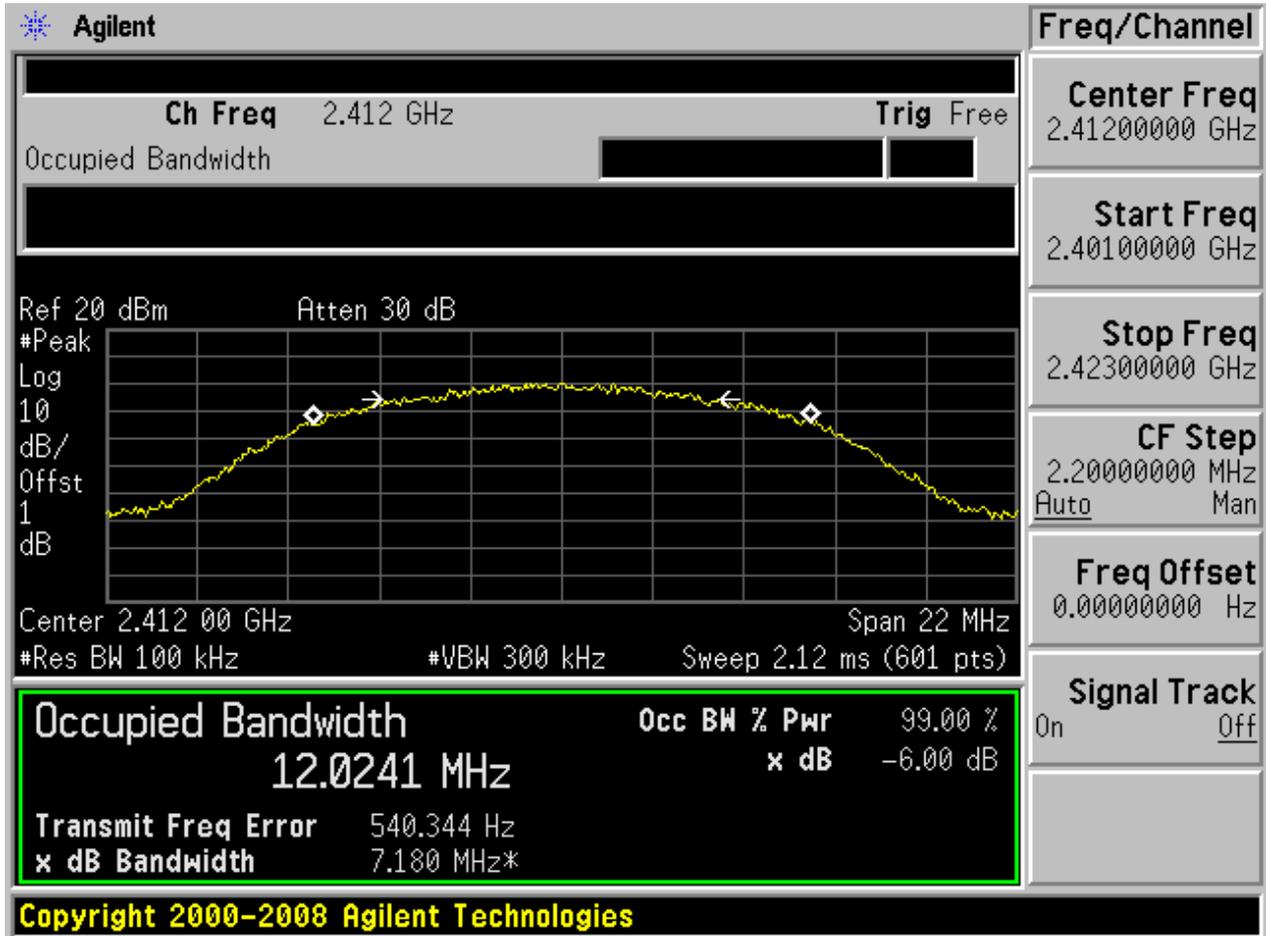




2.2 11B_M

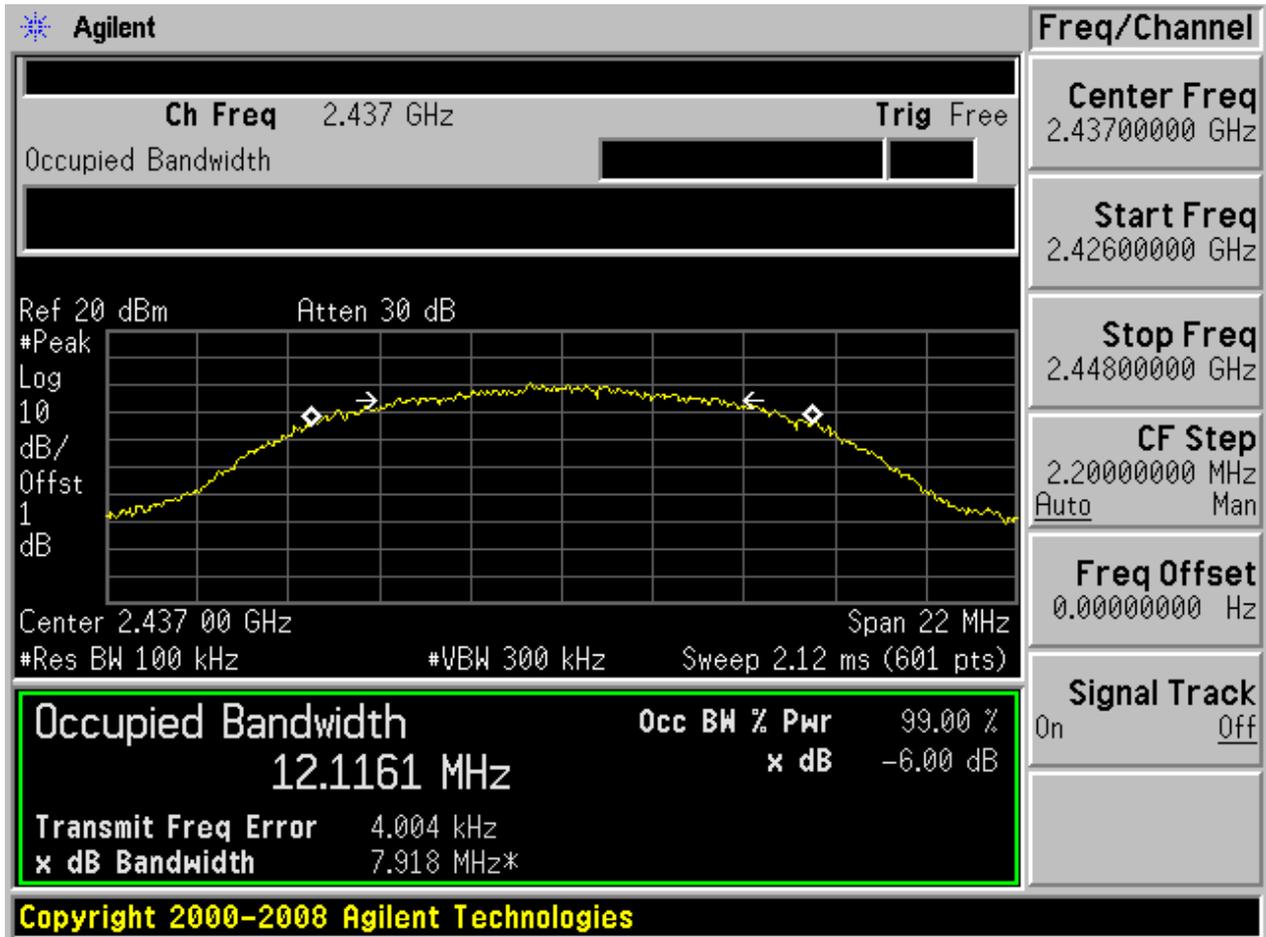




2.3 11B_T

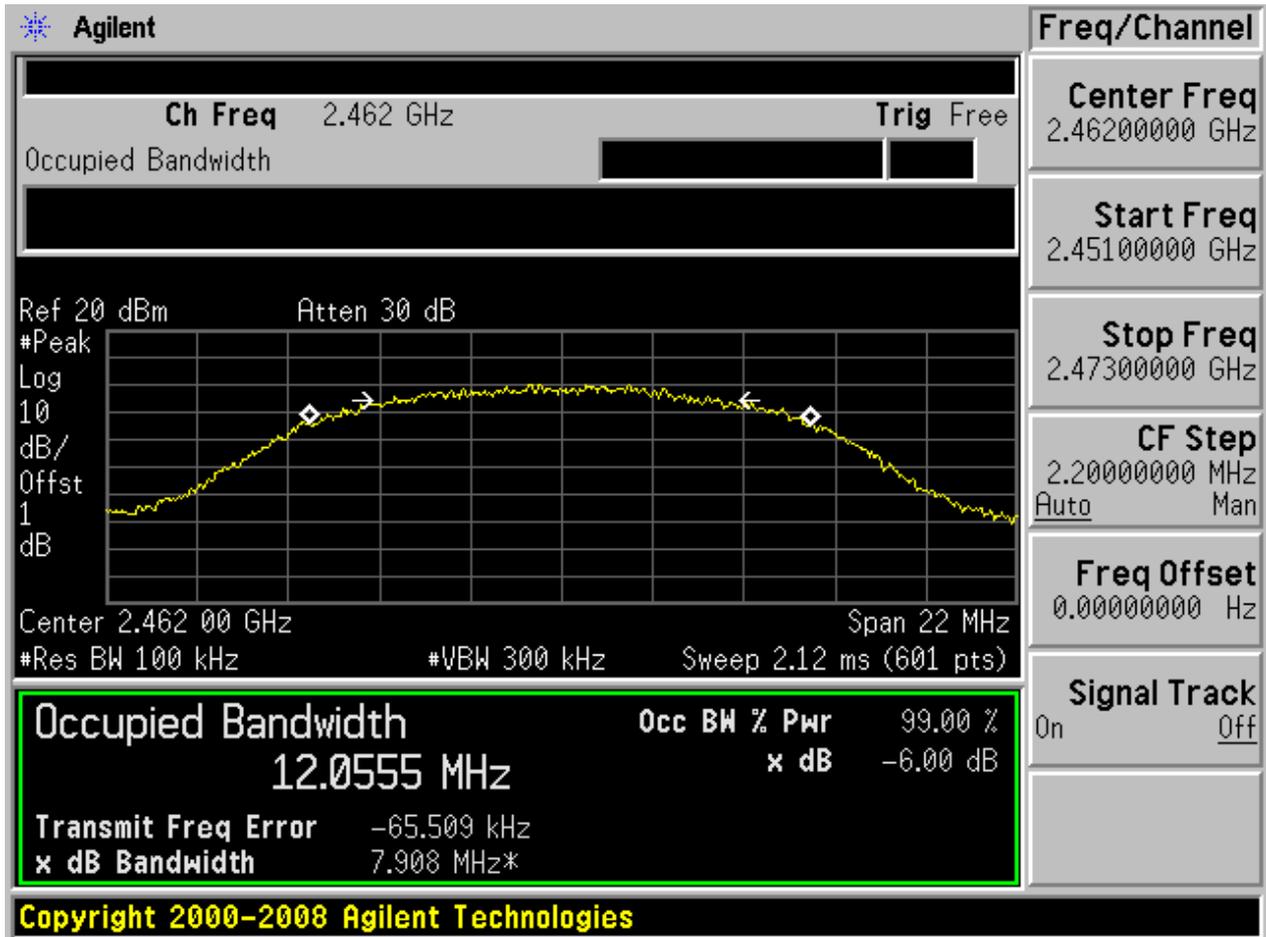




2.4 11G_B

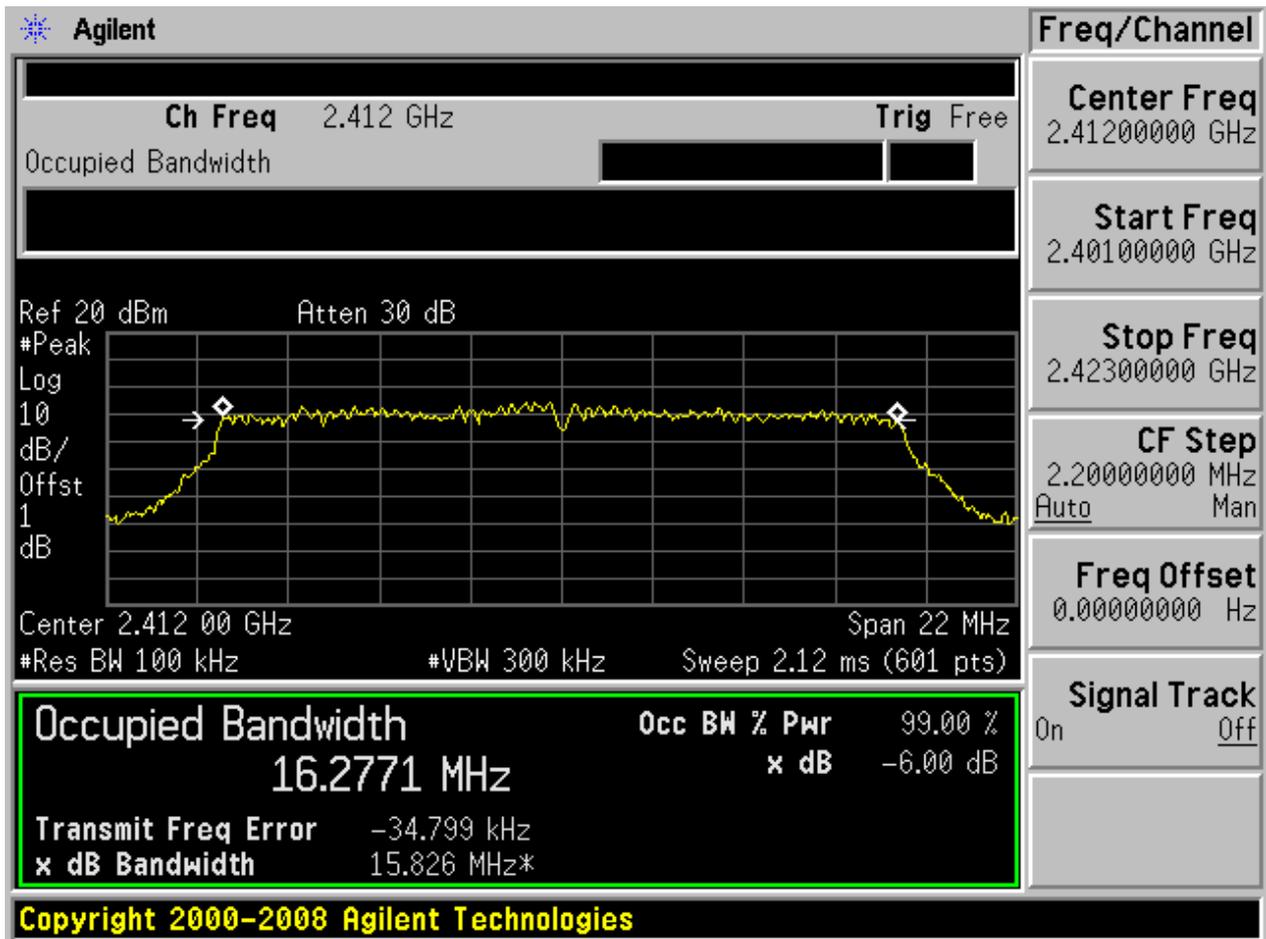




2.5 11G_M

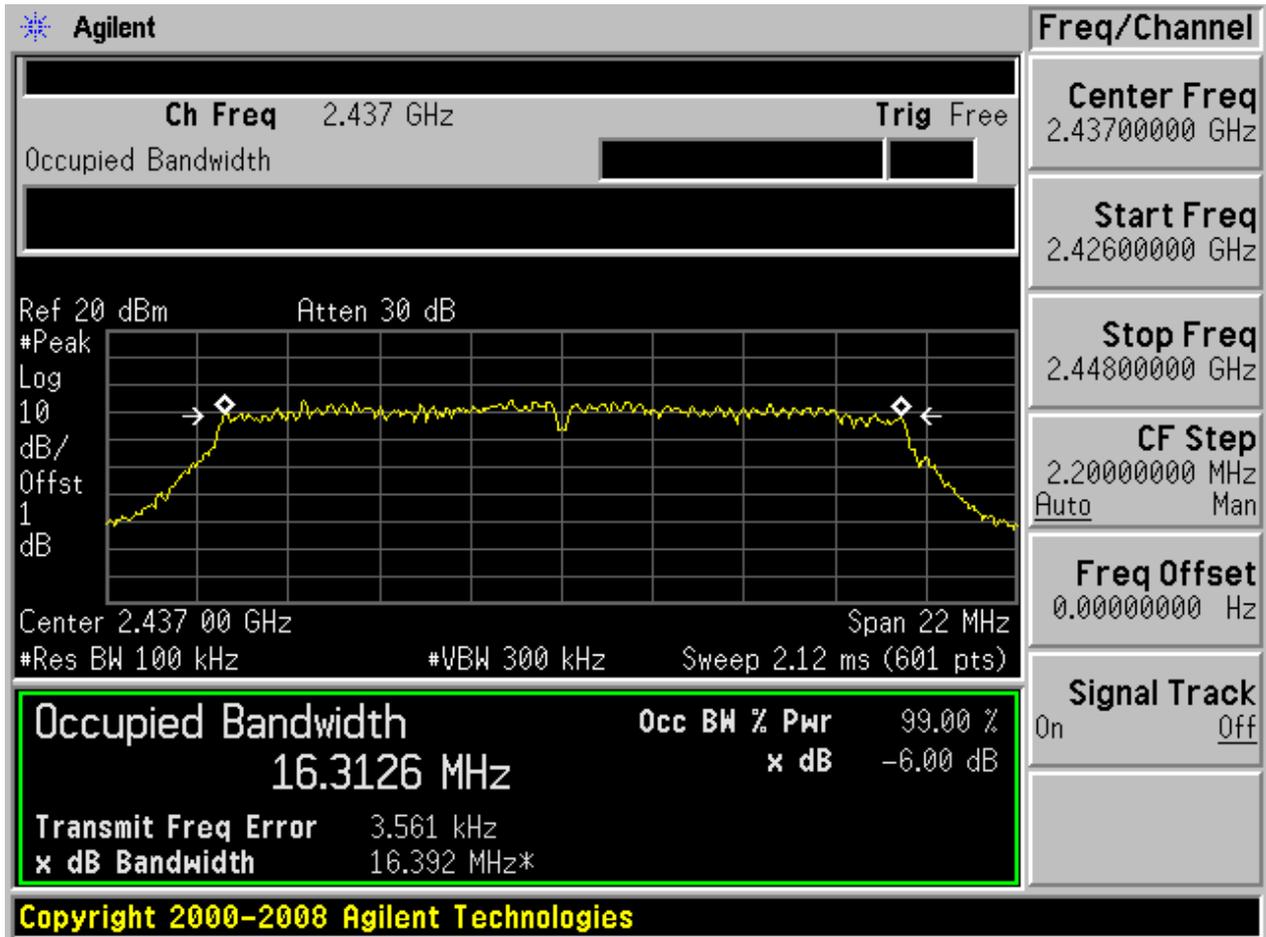




2.6 11G_T

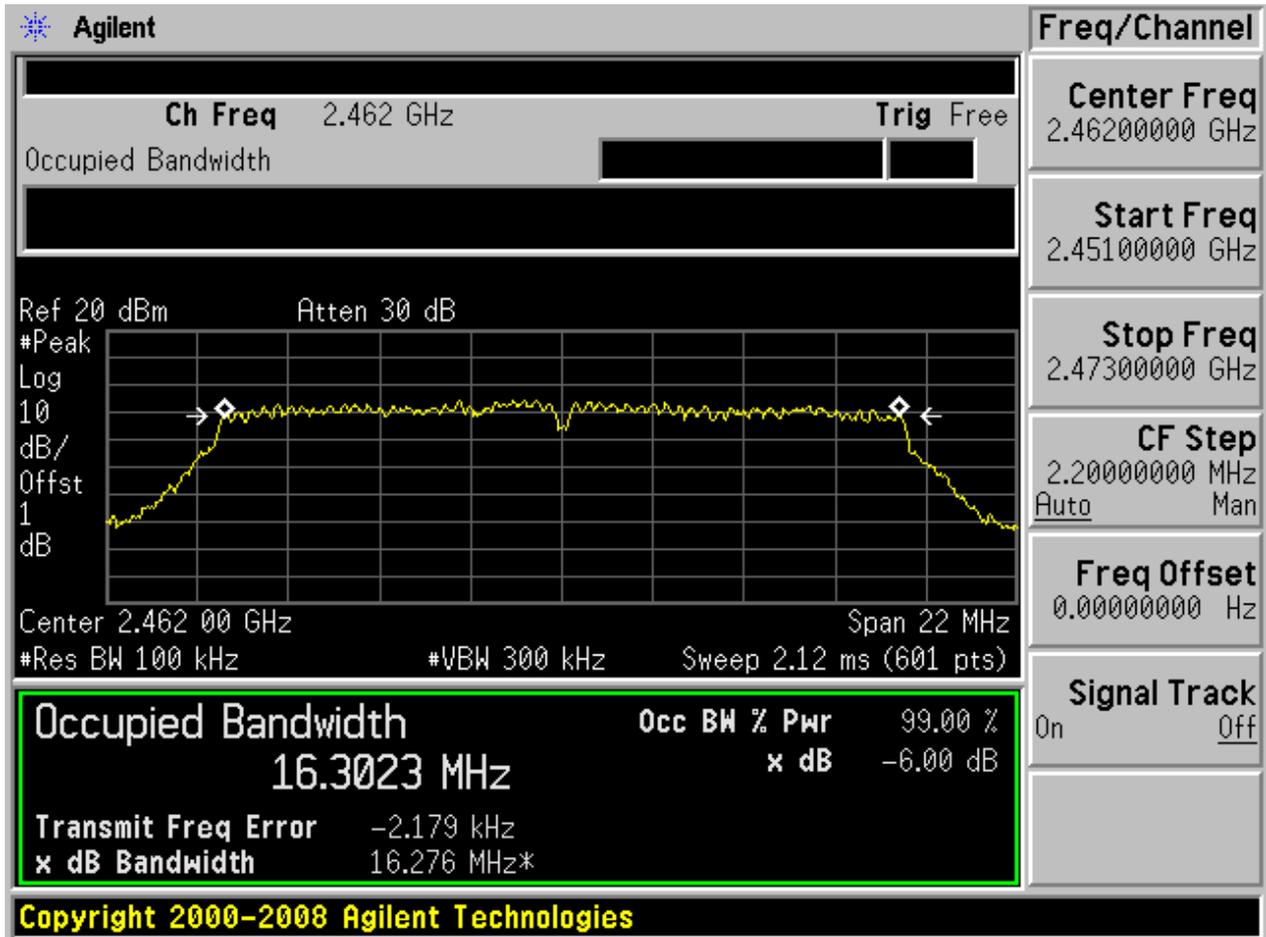




2.7 11N20_B

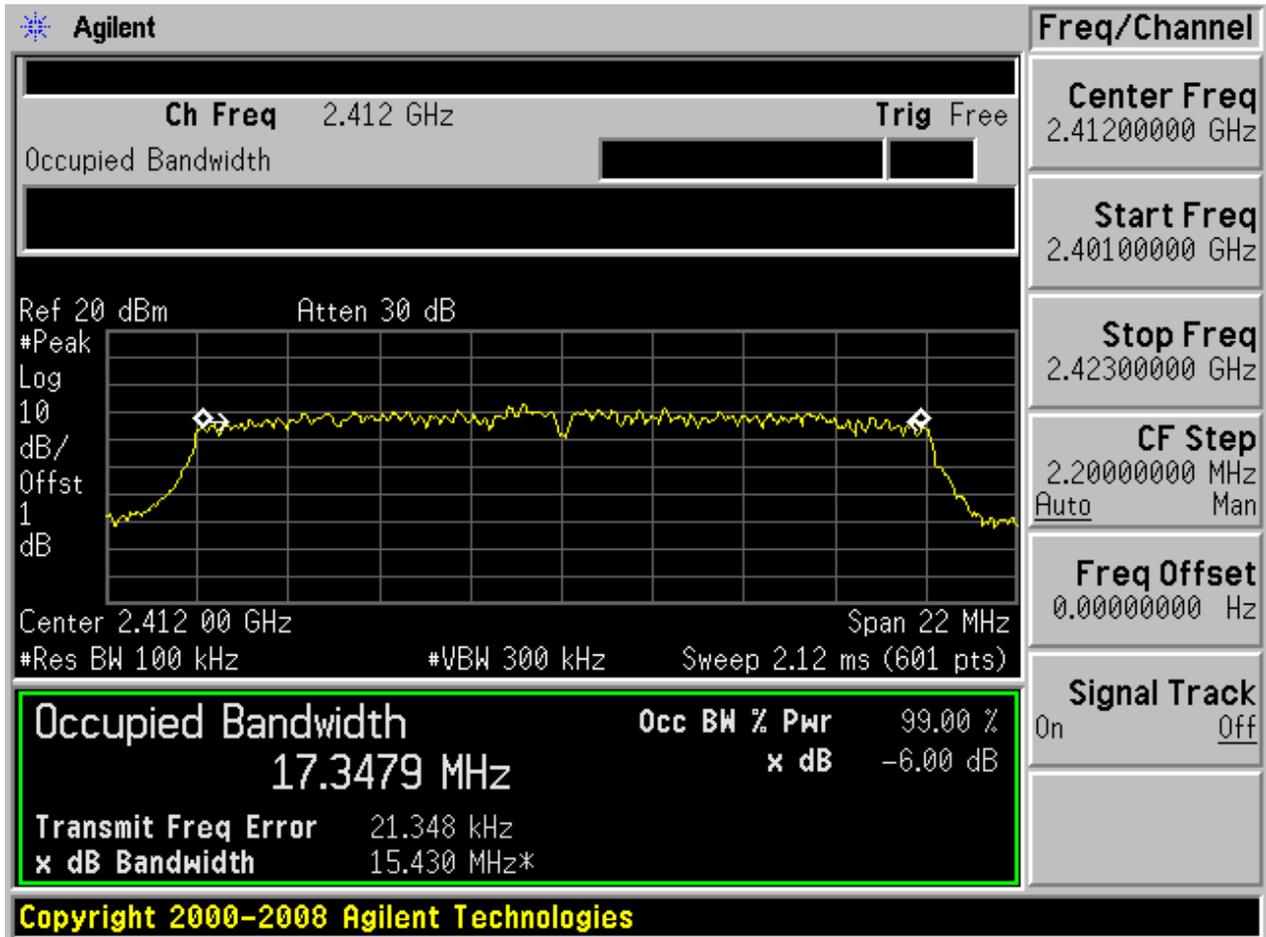




2.8 11N20_M

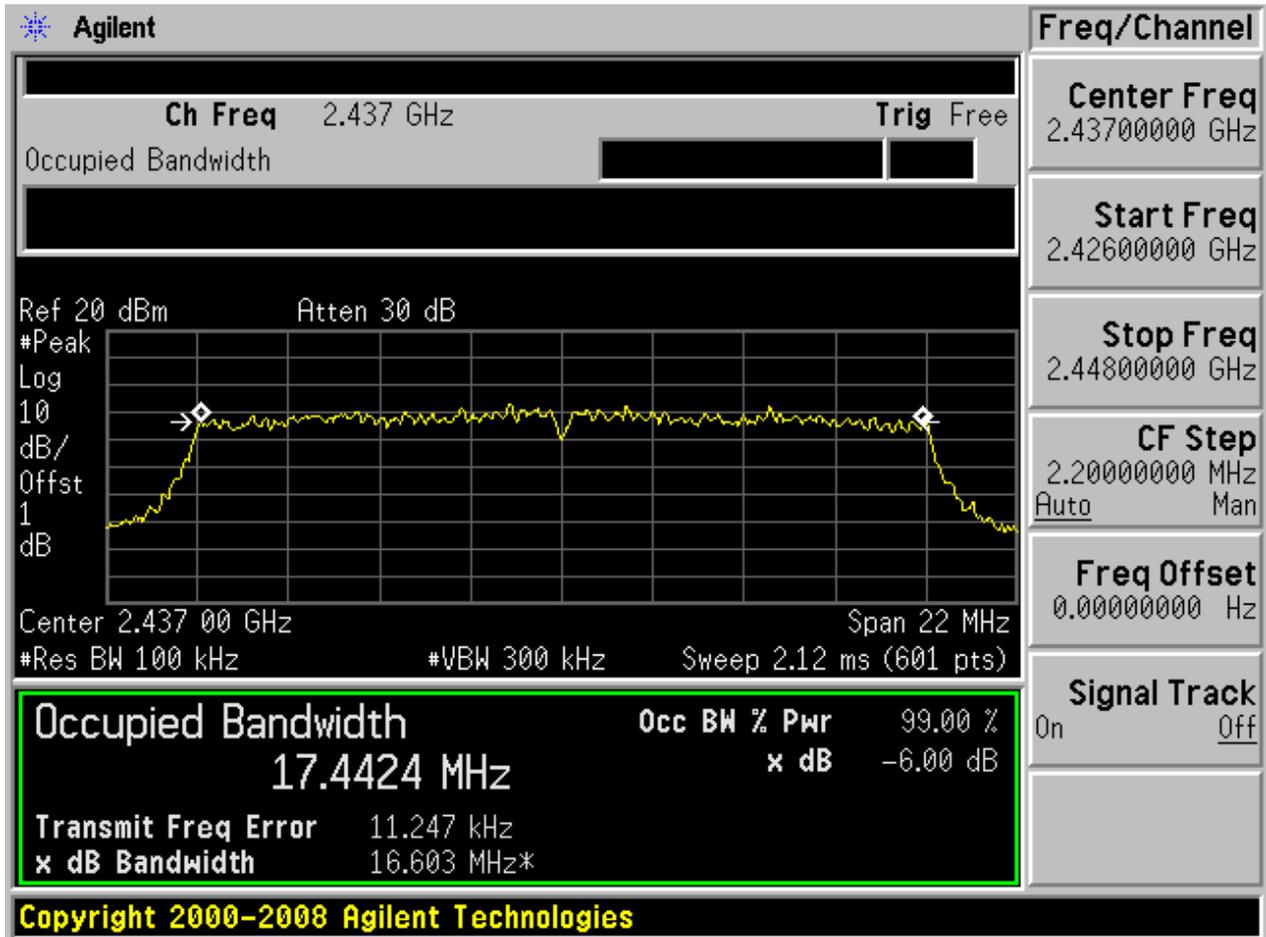



2.9 11N20_T

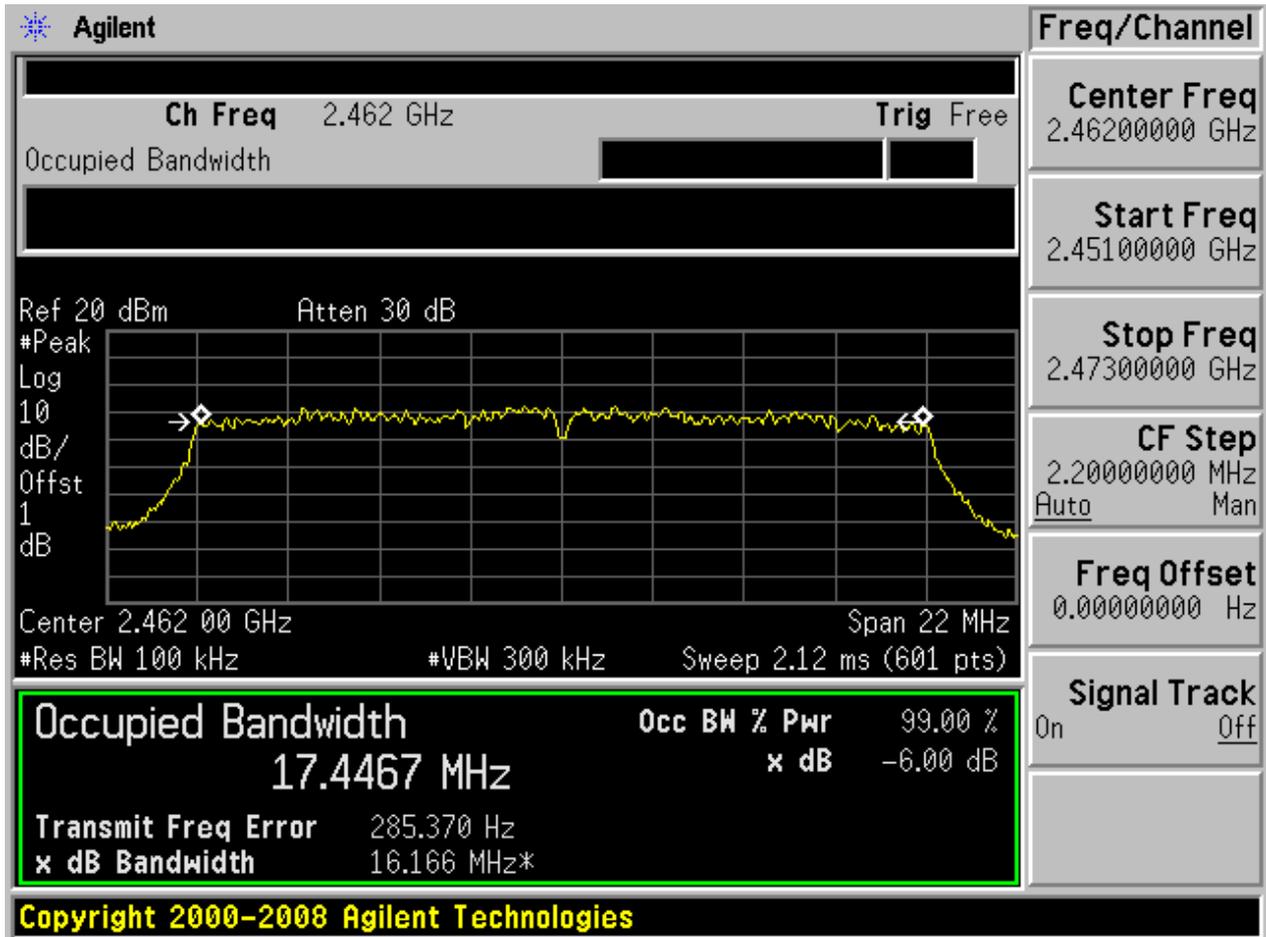



Appendix B: Maximum Peak Conducted Output Power



In this Appendix, the “Pmax” refers to the measured “Maximum Peak Conducted Output Power” value. The “fc(DTS6dBBW)” and “DTS6dBBW” in “DTS (6 dB) Bandwidth” are used to determine the integrated band power.


1 Result Table

EUT Conf.	Channel	Fc [MHz]	Meas. Level (Cond.) [dBm]	Verdict
11B	B	2412	21.00	pass
11B	M	2437	20.84	pass
11B	T	2462	20.96	pass
11G	B	2412	20.74	pass
11G	M	2437	20.73	pass
11G	T	2462	20.87	pass
11N20_SISO	B	2412	18.55	pass
11N20_SISO	M	2437	18.31	pass
11N20_SISO	T	2462	18.58	pass



2 Test Plots


2.1 11B_B

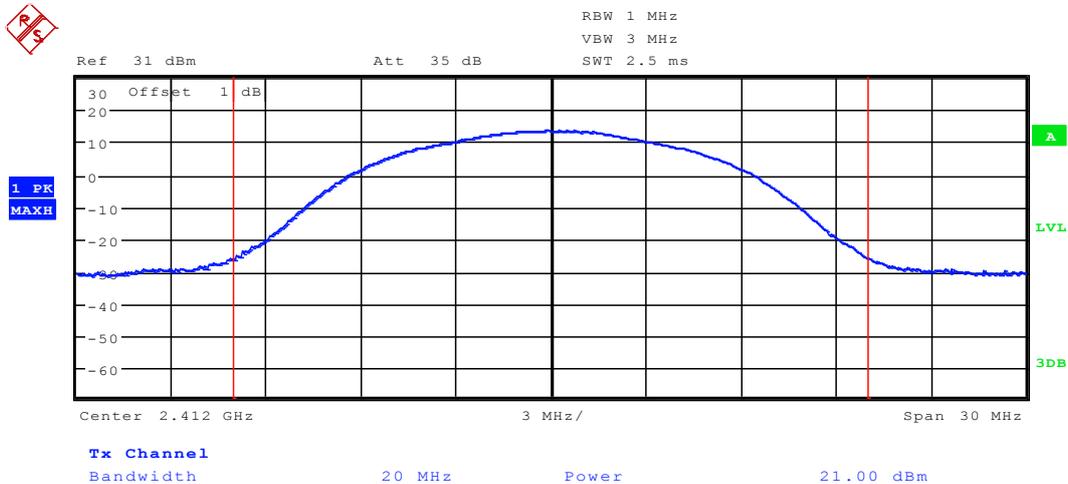

Date: 17.JAN.2013 22:46:28




2.2 11B_M

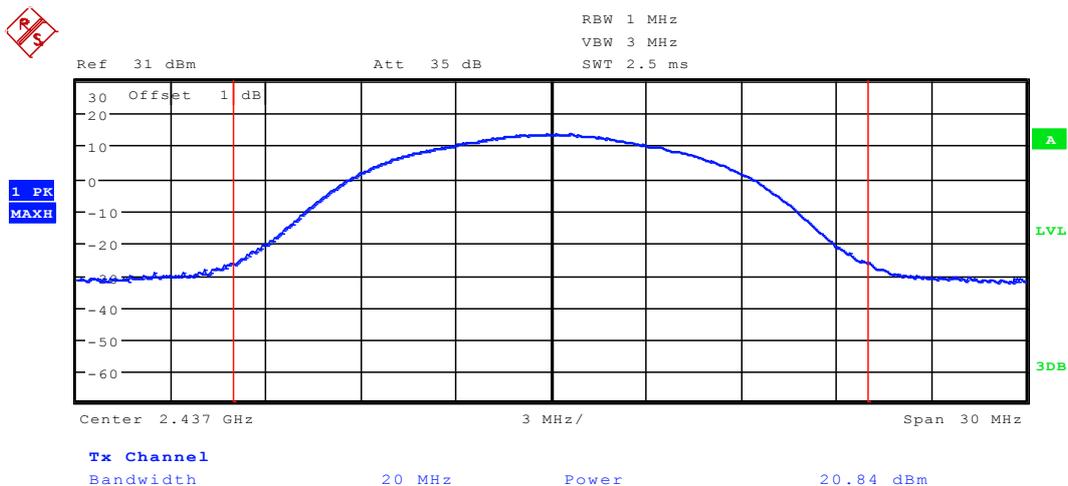

Date: 17.JAN.2013 22:47:35




2.3 11B_T

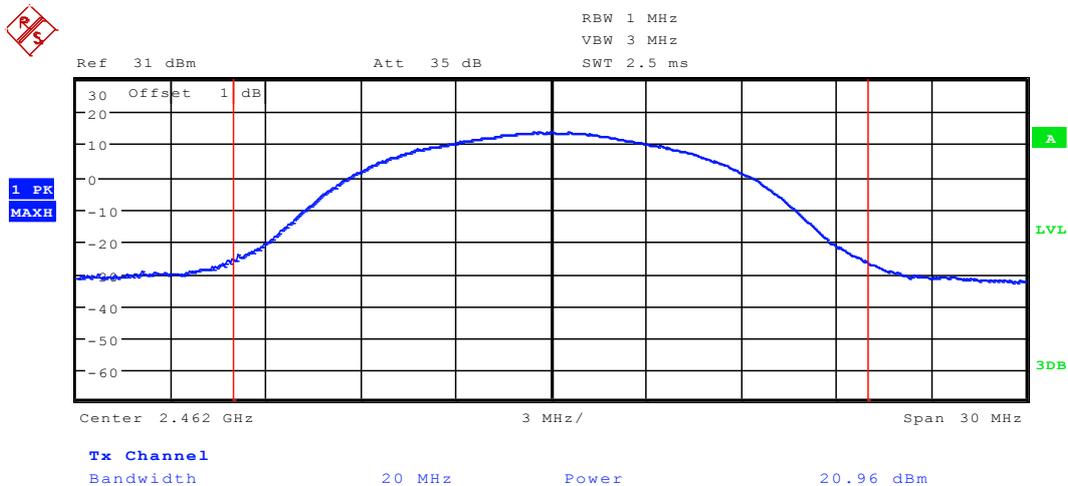

Date: 17.JAN.2013 23:02:20




2.4 11G_B

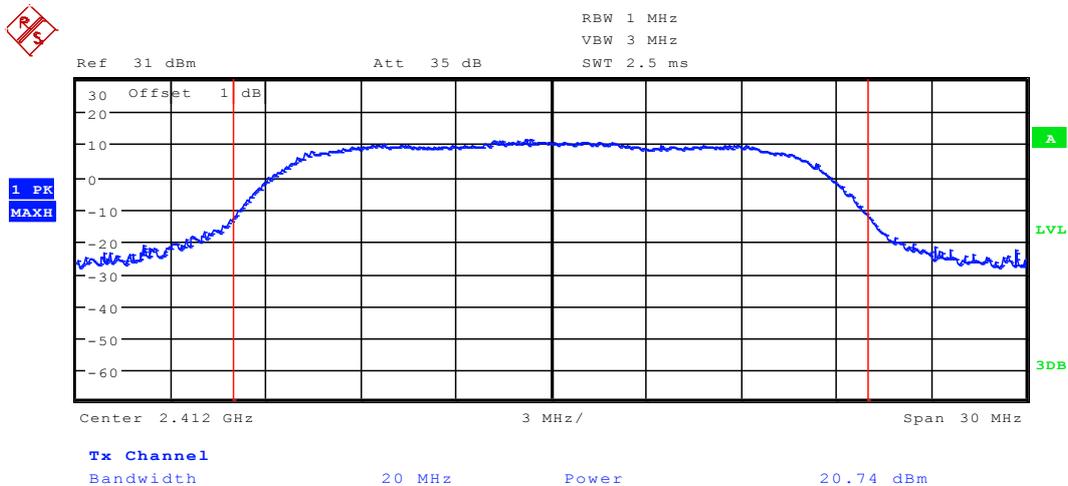

Date: 17.JAN.2013 23:00:32




2.5 11G_M

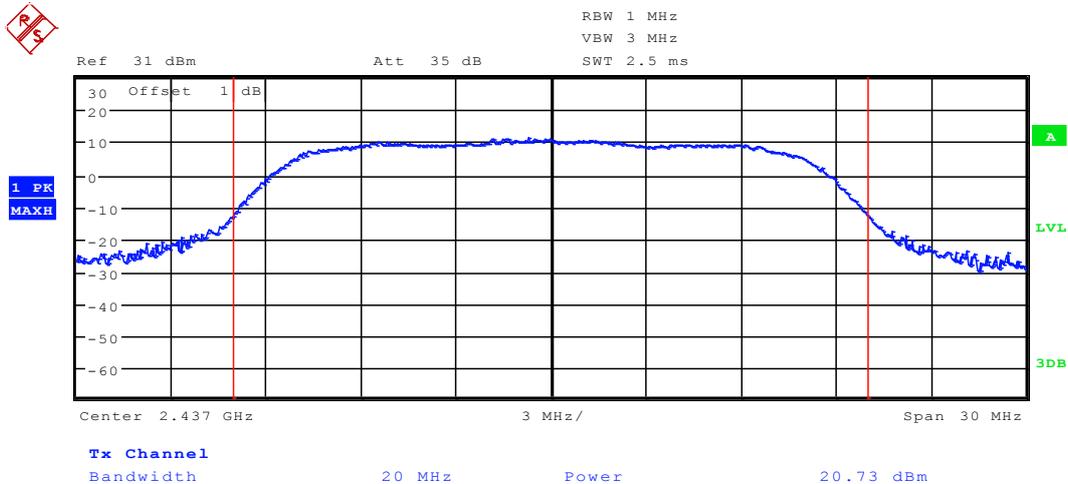

Date: 17.JAN.2013 23:08:09




2.7 11N20_B

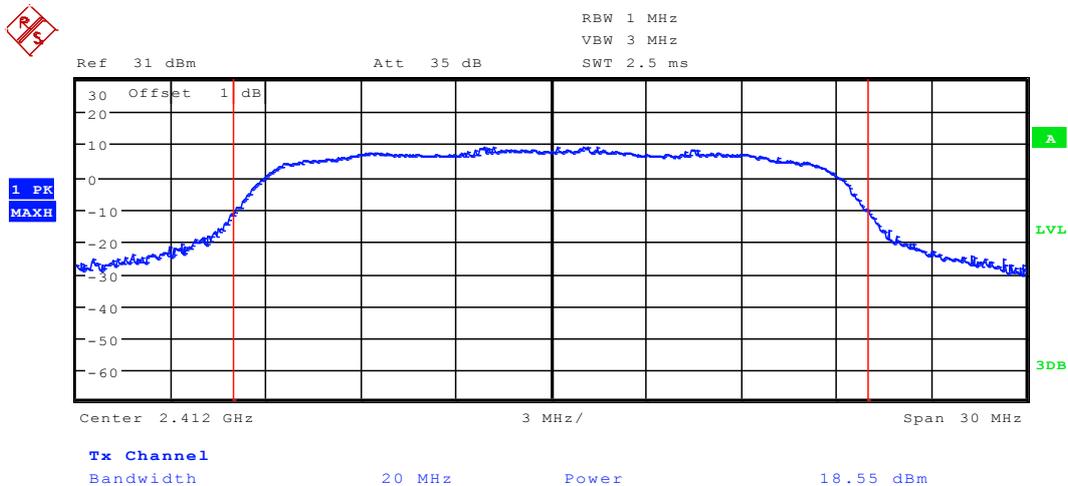

Date: 18.JAN.2013 00:09:14




2.8 11N20_M

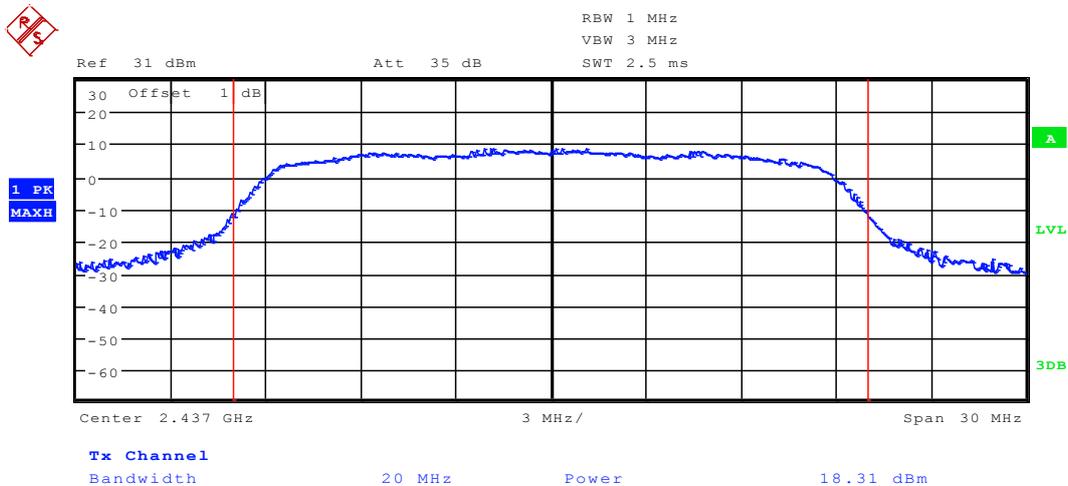

Date: 18.JAN.2013 00:05:06



2.9 11N20_T

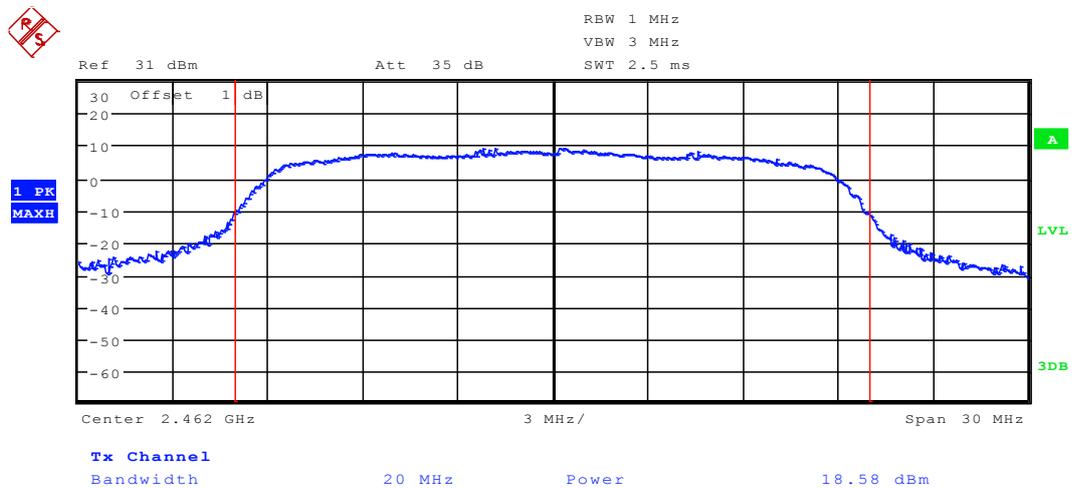

Date: 18.JAN.2013 00:03:03



Appendix C: Maximum Power Spectral Density Level


1 Result Table

EUT.conf.	Channel	Fc (MHz)	PD [dBm]	Verdict
11B	B	2412	2.921	pass
11B	M	2437	3.152	pass
11B	T	2462	3.662	pass
11G	B	2412	-2.759	pass
11G	M	2437	-3.206	pass
11G	T	2462	-3.174	pass
11N20	B	2412	-5.226	pass
11N20	M	2437	-4.893	pass
11N20	T	2462	-5.230	pass




2 Test Plot

2.1 11B_B

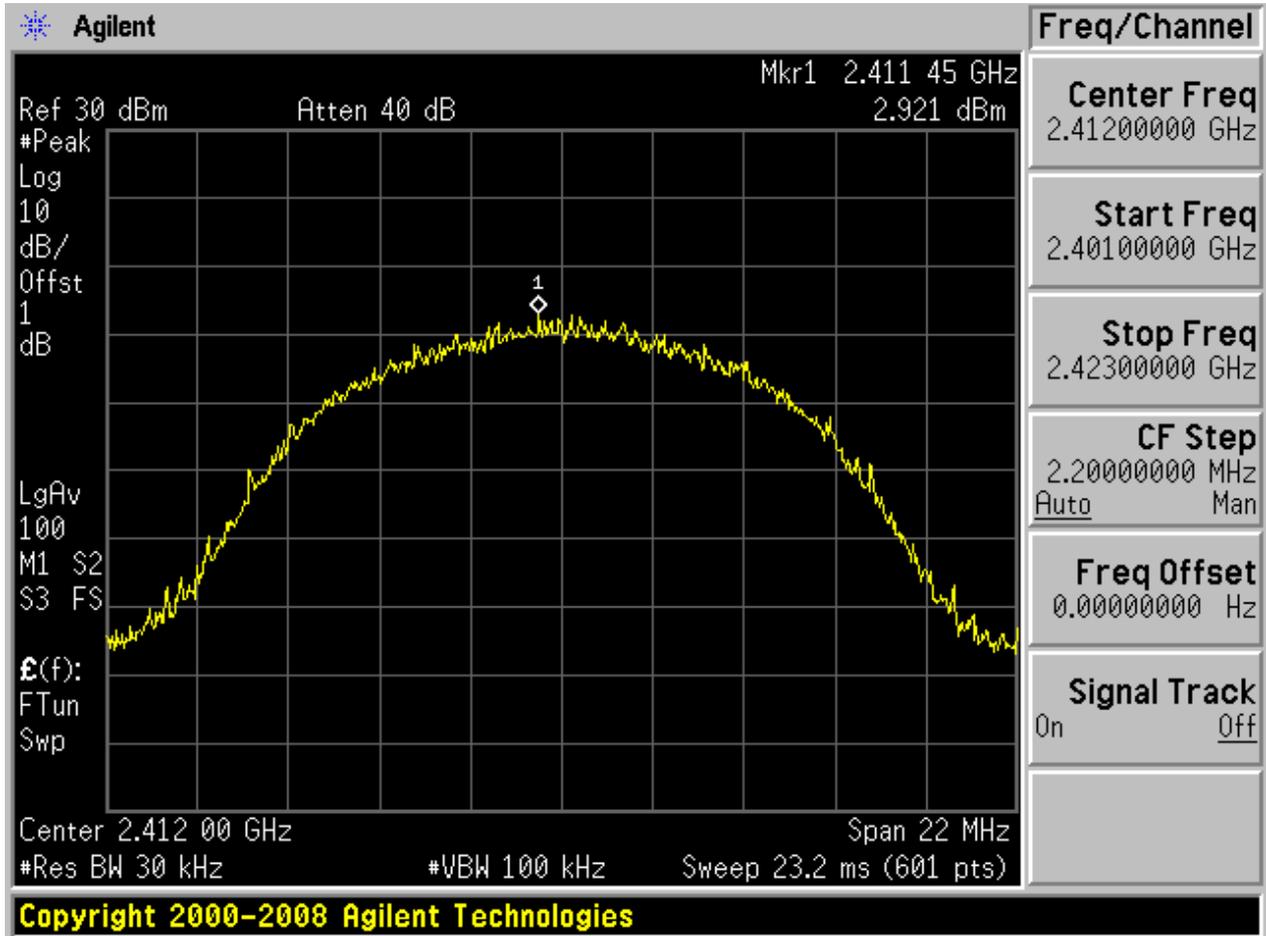




2.2 11B_M

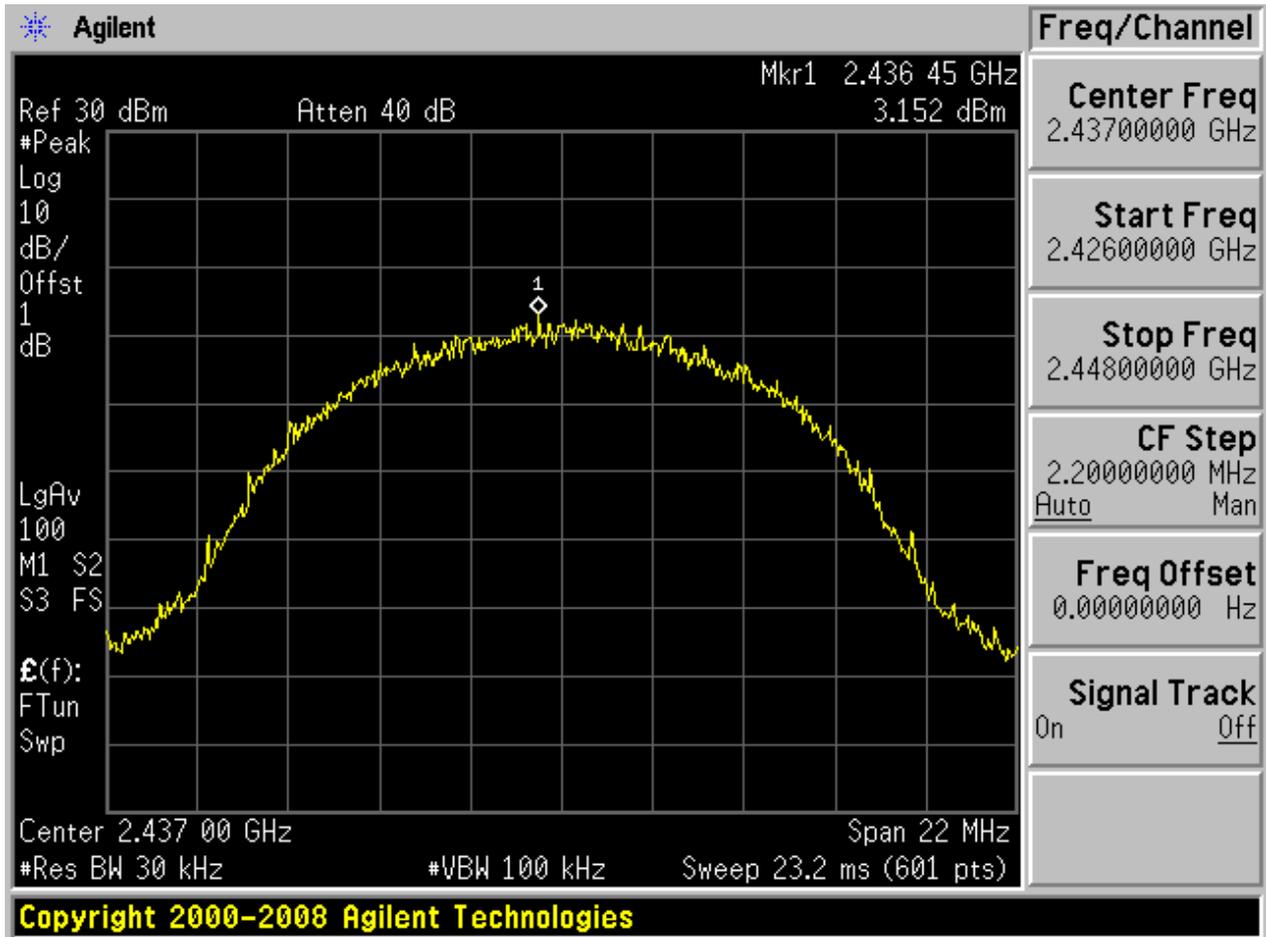




2.3 11B_T

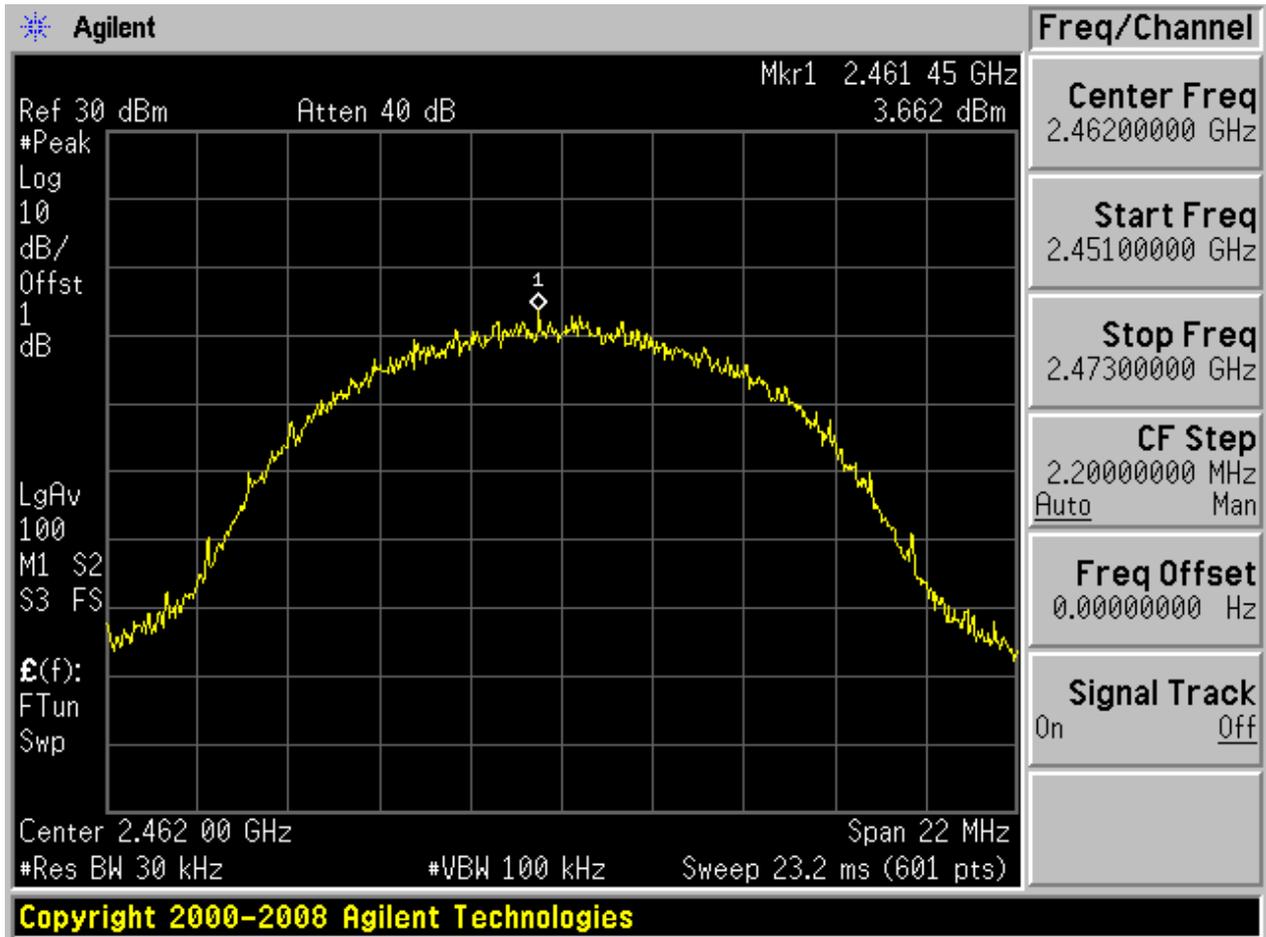




2.4 11G_B

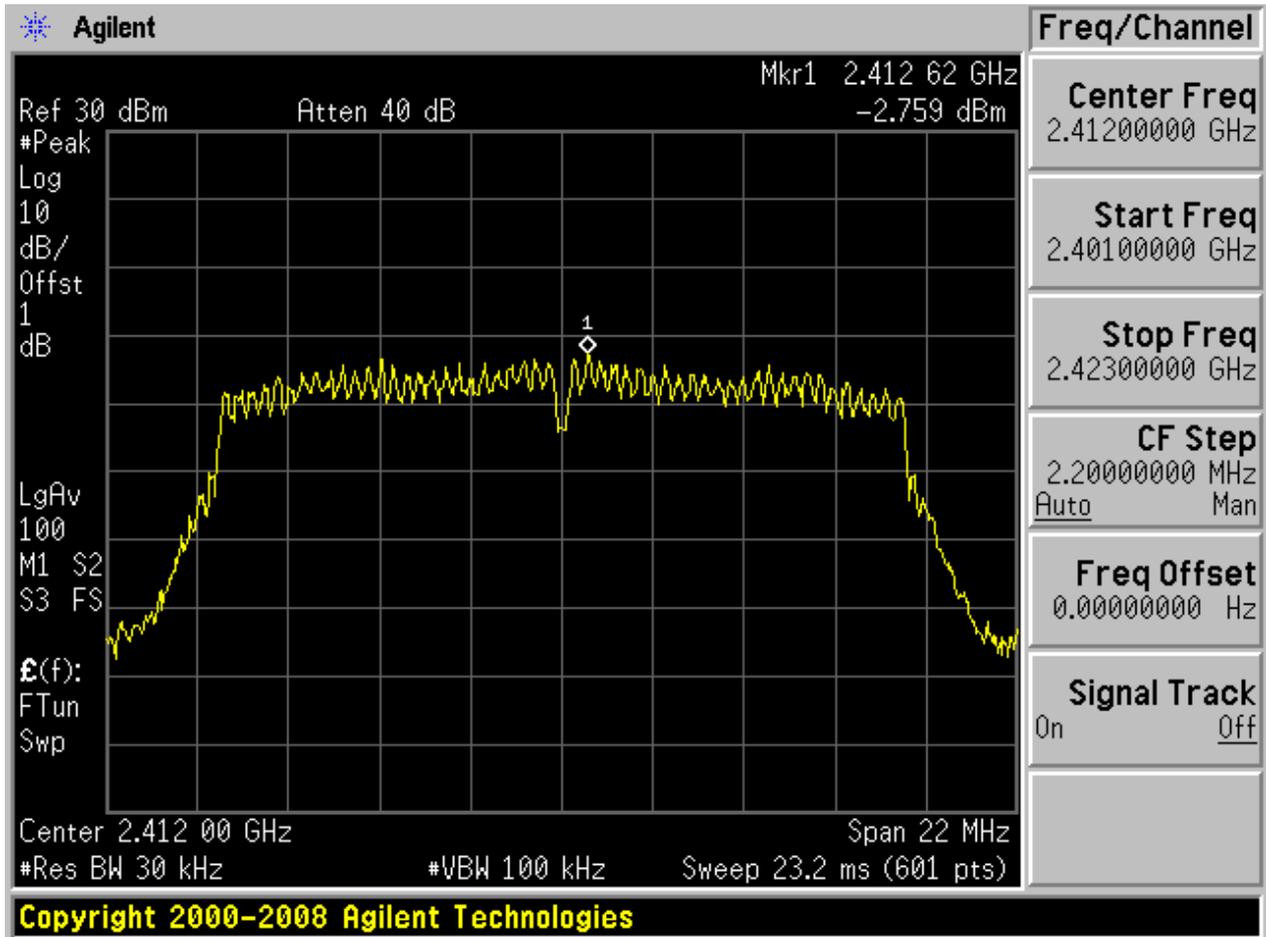




2.5 11G_M

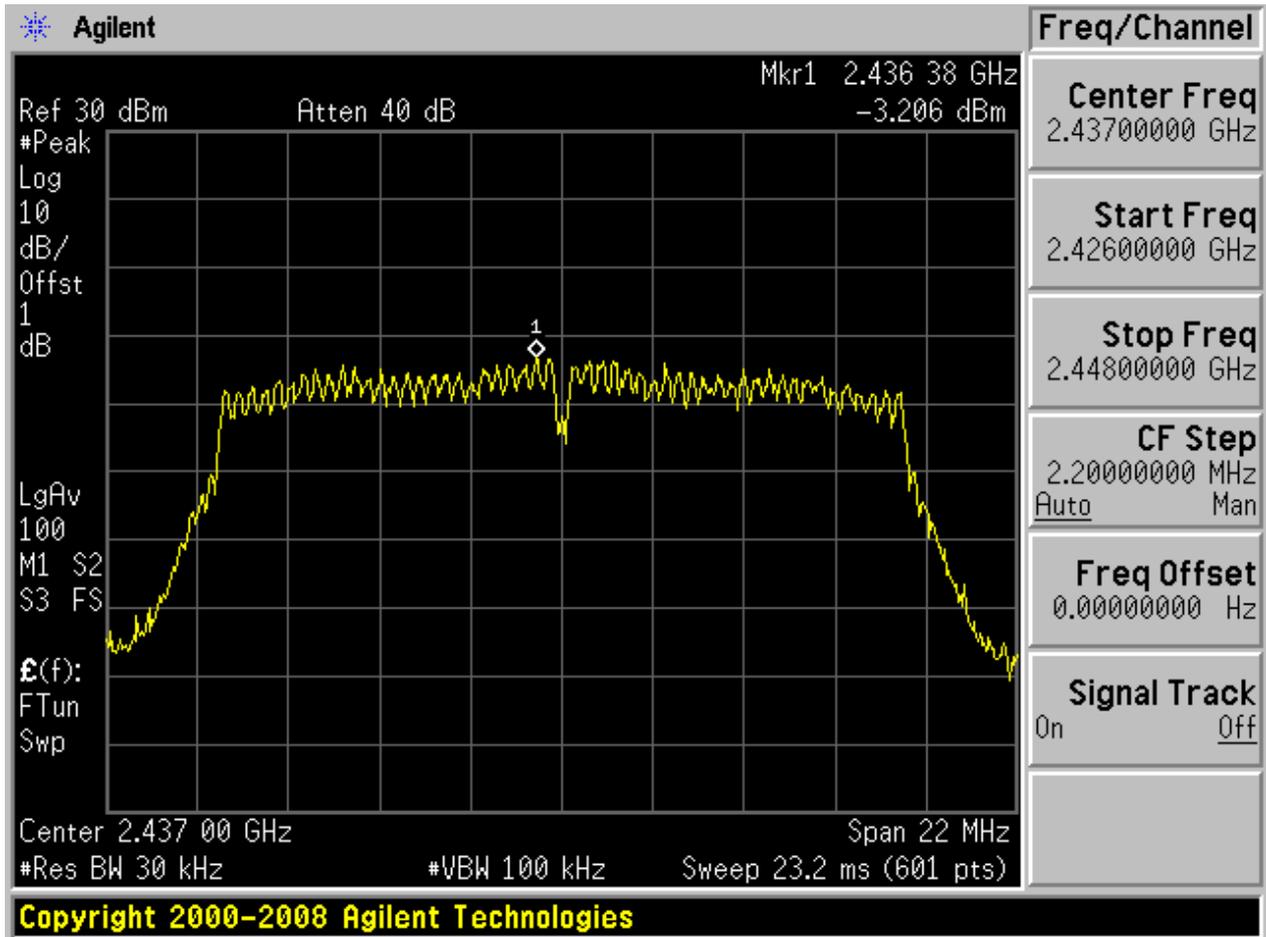



2.7 11N20_B

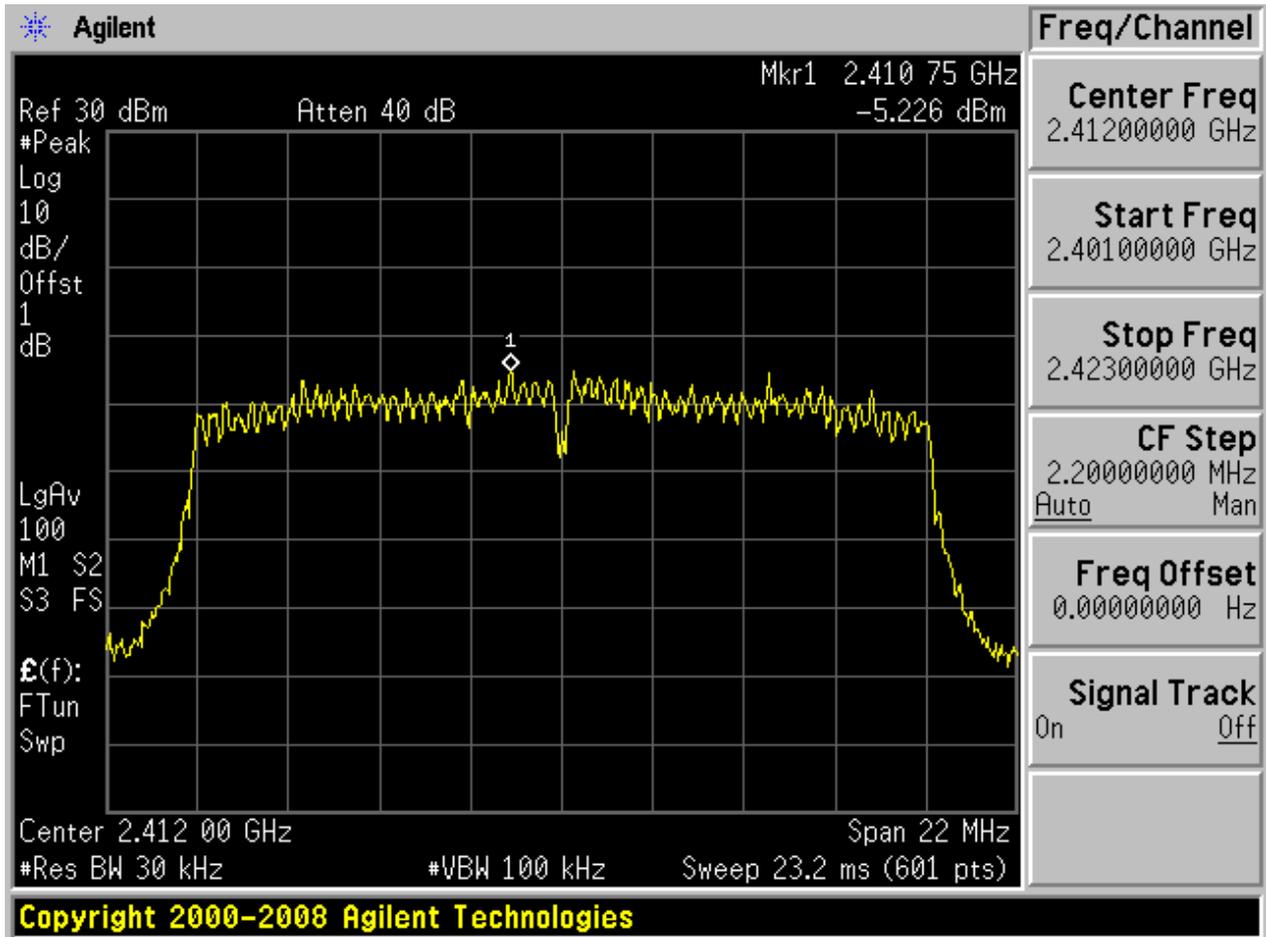



Appendix D: Band Edges Compliance




1 Result Table


Eut.conf	Channel	Fc (MHz)	Carrier Power [dBm]	Max. Spurious Level [dBm]	verdict
11B	B	2412	5.83	-40.25	pass
	T	2462	6.24	-51.16	pass
11G	B	2412	0.33	-39.08	pass
	T	2462	1.93	-42.36	pass
11N20	B	2412	-1.48	-42.00	pass
	T	2462	-1.18	-47.40	pass

2 Test Plot


2.1 11B_B

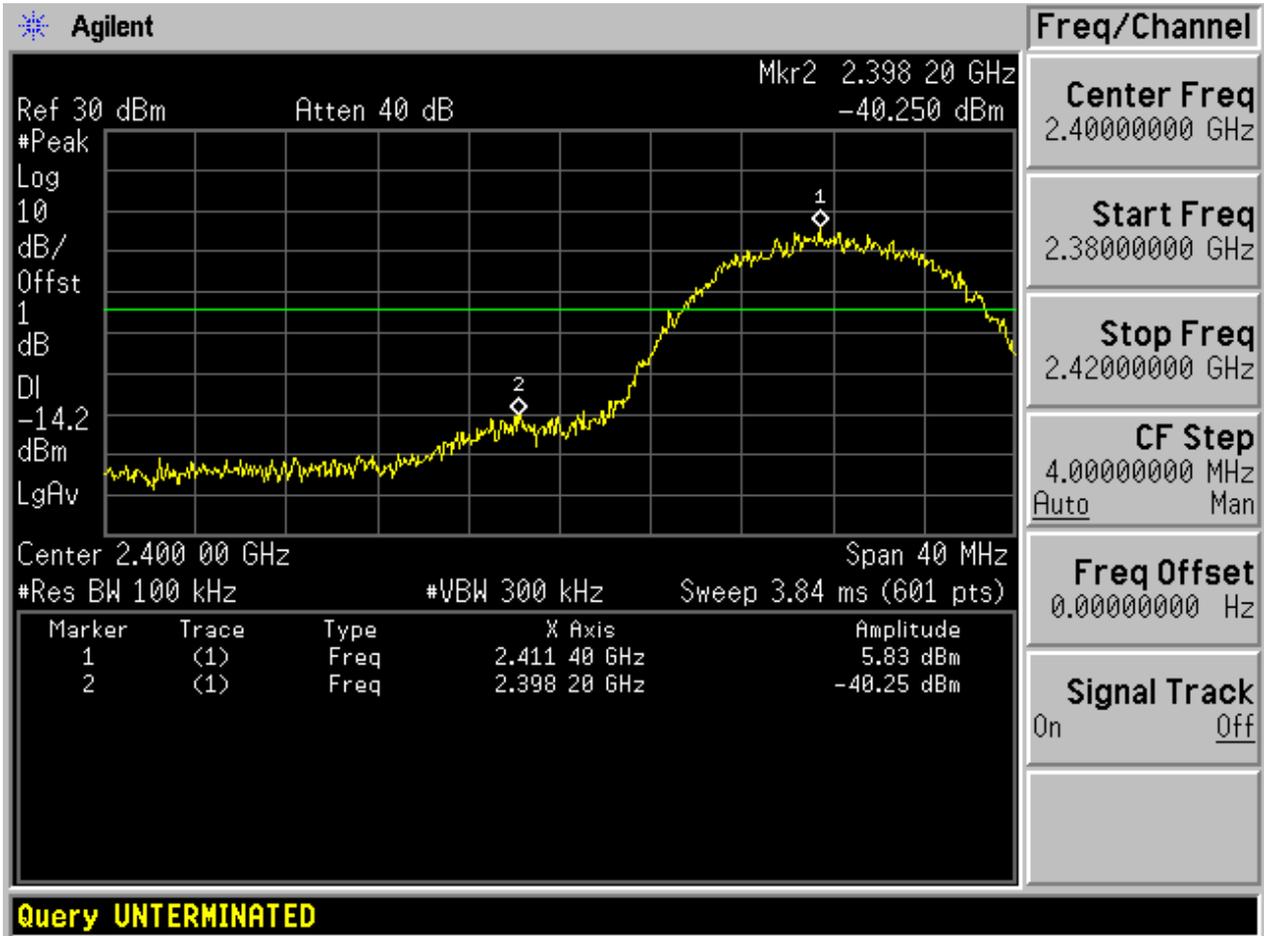


2.2 11B_T

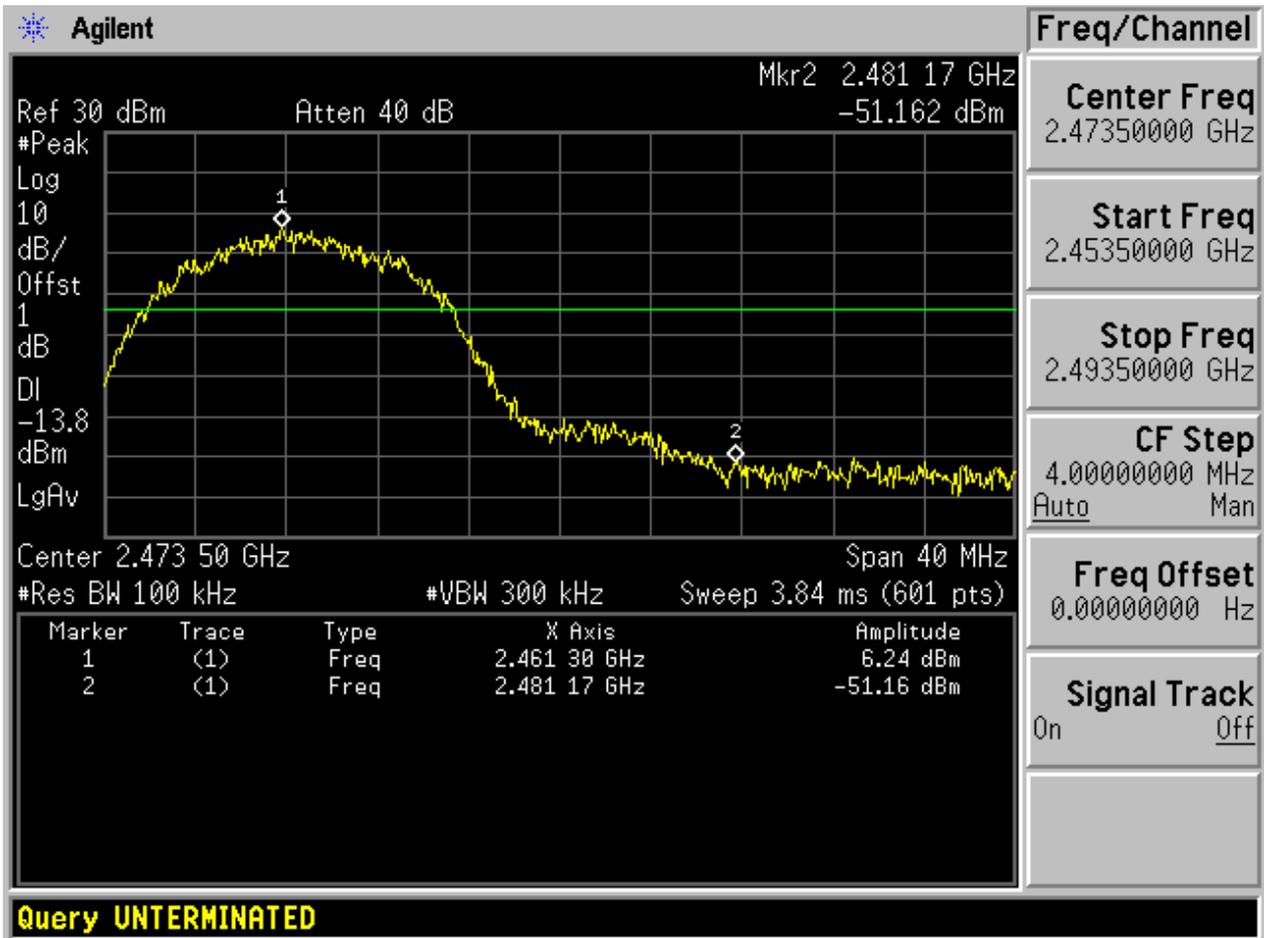


2.3 11G_B

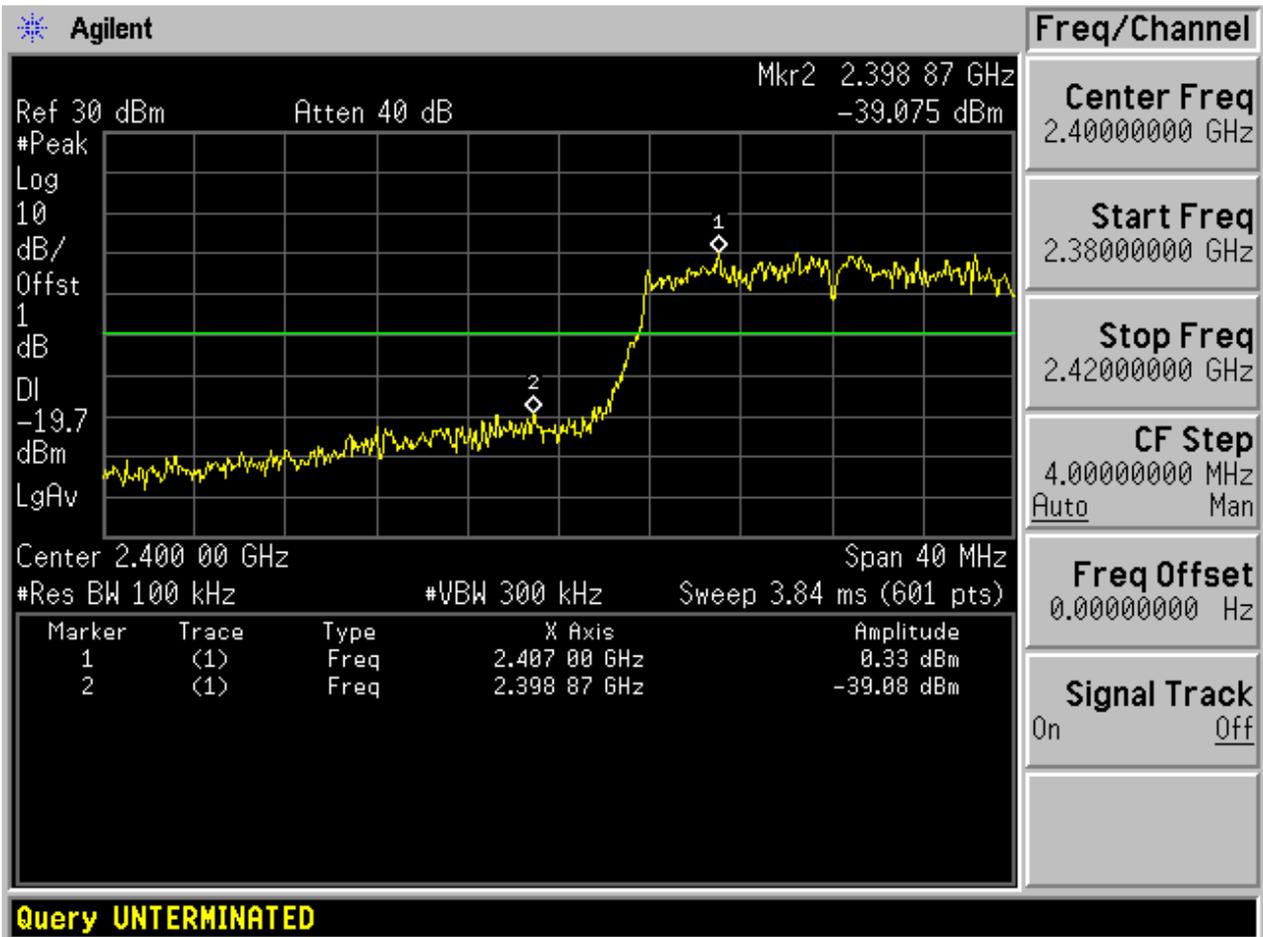


2.4 11G_T

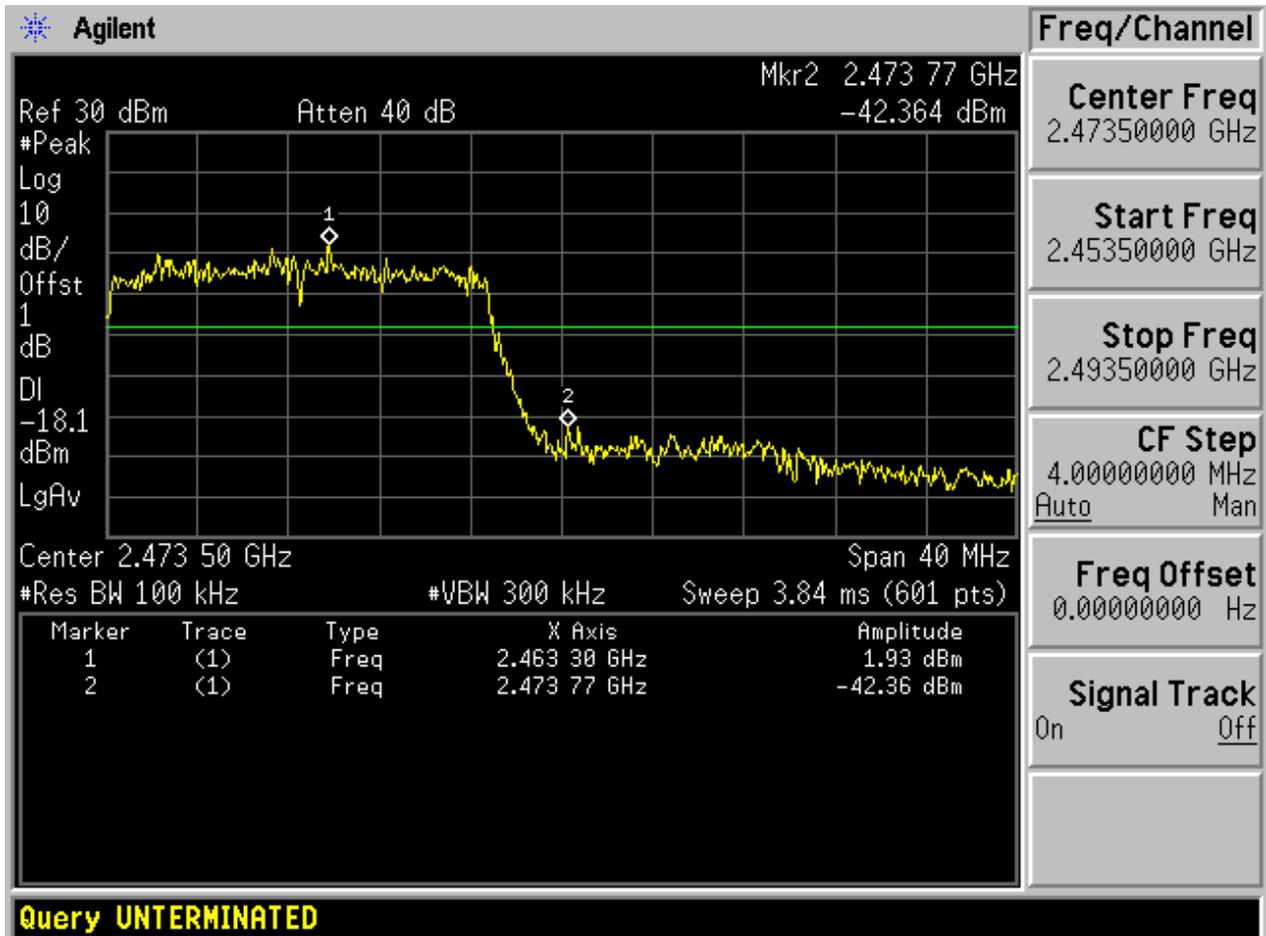

2.5 11N20_B

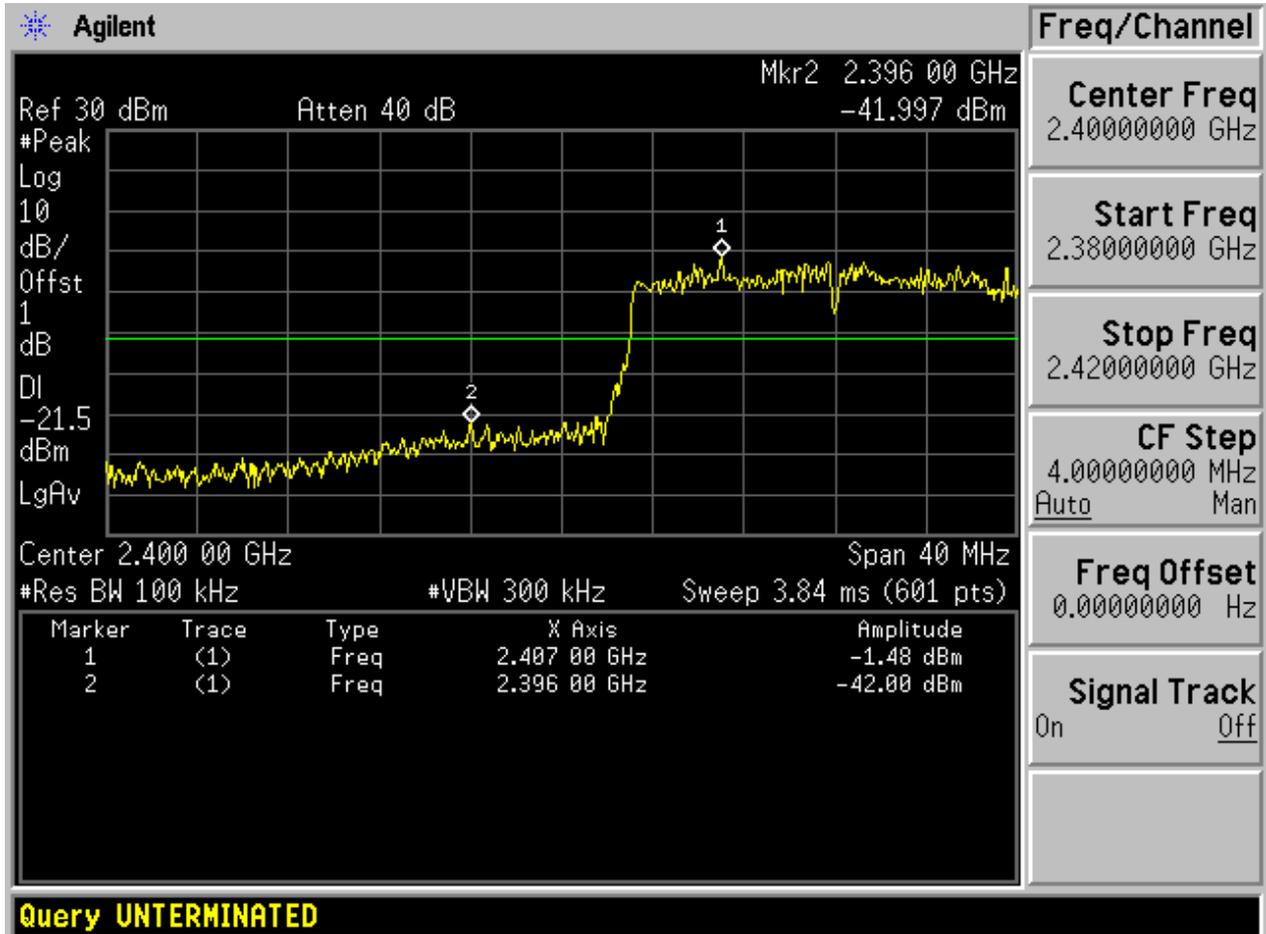

2.6 11N20_T

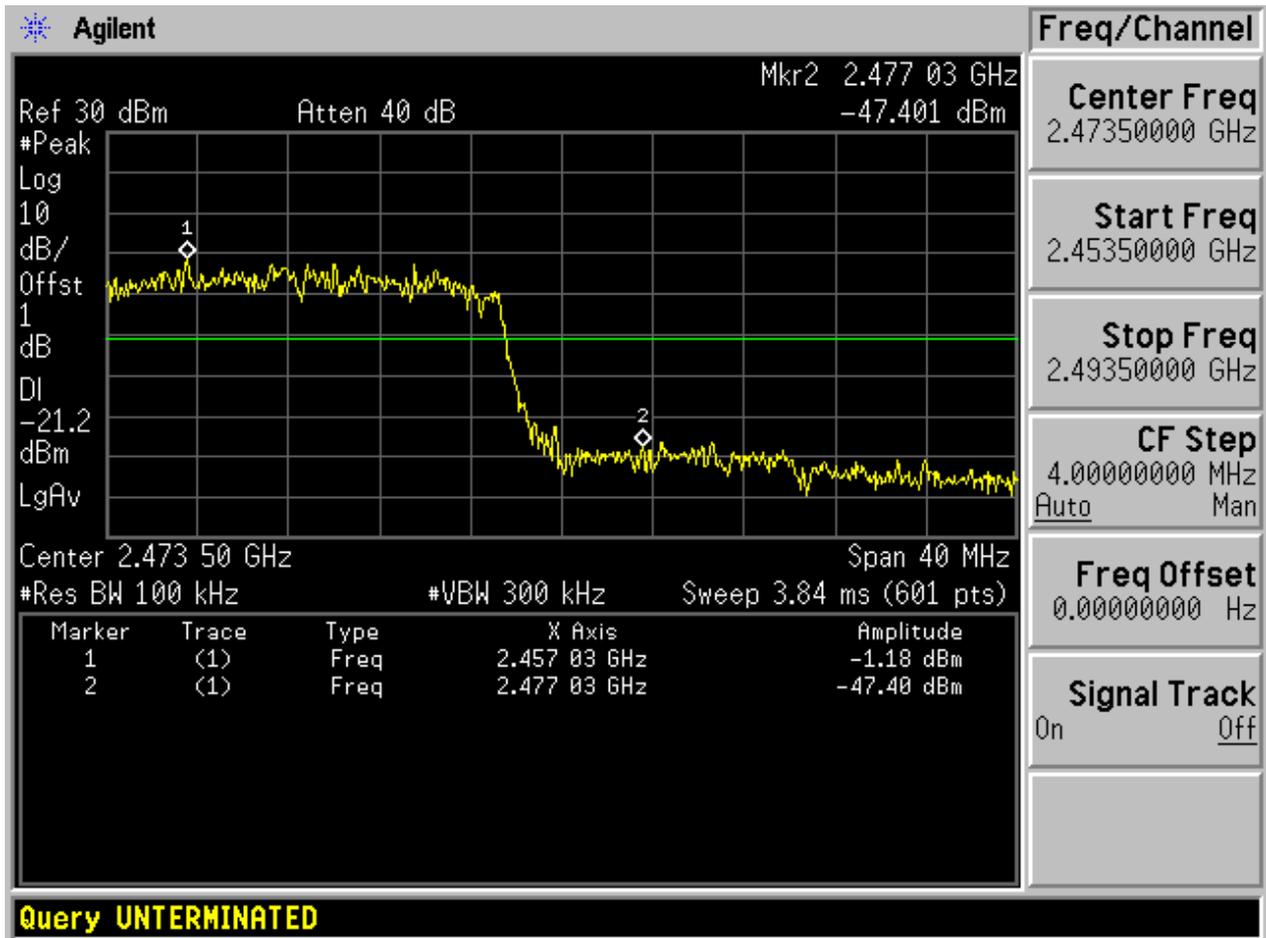



Appendix E: Unwanted Emissions into Non-Restricted Frequency Bands

In this Appendix, the “Pref”, which is used as the reference level, refers to the peak power level in any 100 kHz bandwidth within the fundamental emission, the “Puw” refers to the maximum emission power in 100 kHz band segments outside of the authorized frequency band.

Considering that the higher ratio of RBW to the span for the frequency ranges below 30 MHz makes the results determination be complicated, a narrower RBW other than 100 kHz is used for these ranges. The measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \times \lg(100 [kHz]/\text{narrower RBW [kHz]})$. As to this Appendix, the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

For measurements on smart antenna systems (devices with multiple transmit chains), the test is performed at each chain and used as respective results for each chain, due to the relative-limit requirement.

In the result table, the “< Limit” denotes that “The Puw [dBm] is less than Pref [dBm] – 20 [dBm], see test plots for detailed”.


1 Result Table

Eut.conf	Channel	Fc (MHz)	Pref [dBm]	Puw [dBm]	Verdict
11B	B	2412	7.467	<limit	pass
11B	M	2437	7.532	<limit	pass
11B	T	2462	7.610	<limit	pass
11G	B	2412	1.845	<limit	pass
11G	M	2437	2.047	<limit	pass
11G	T	2462	2.245	<limit	pass
11N20	B	2412	-0.129	<limit	pass
11N20	M	2437	-0.039	<limit	pass
11N20	T	2462	0.169	<limit	pass

2 Test Plot

2.1 11B_B


2.1.1 Pref:

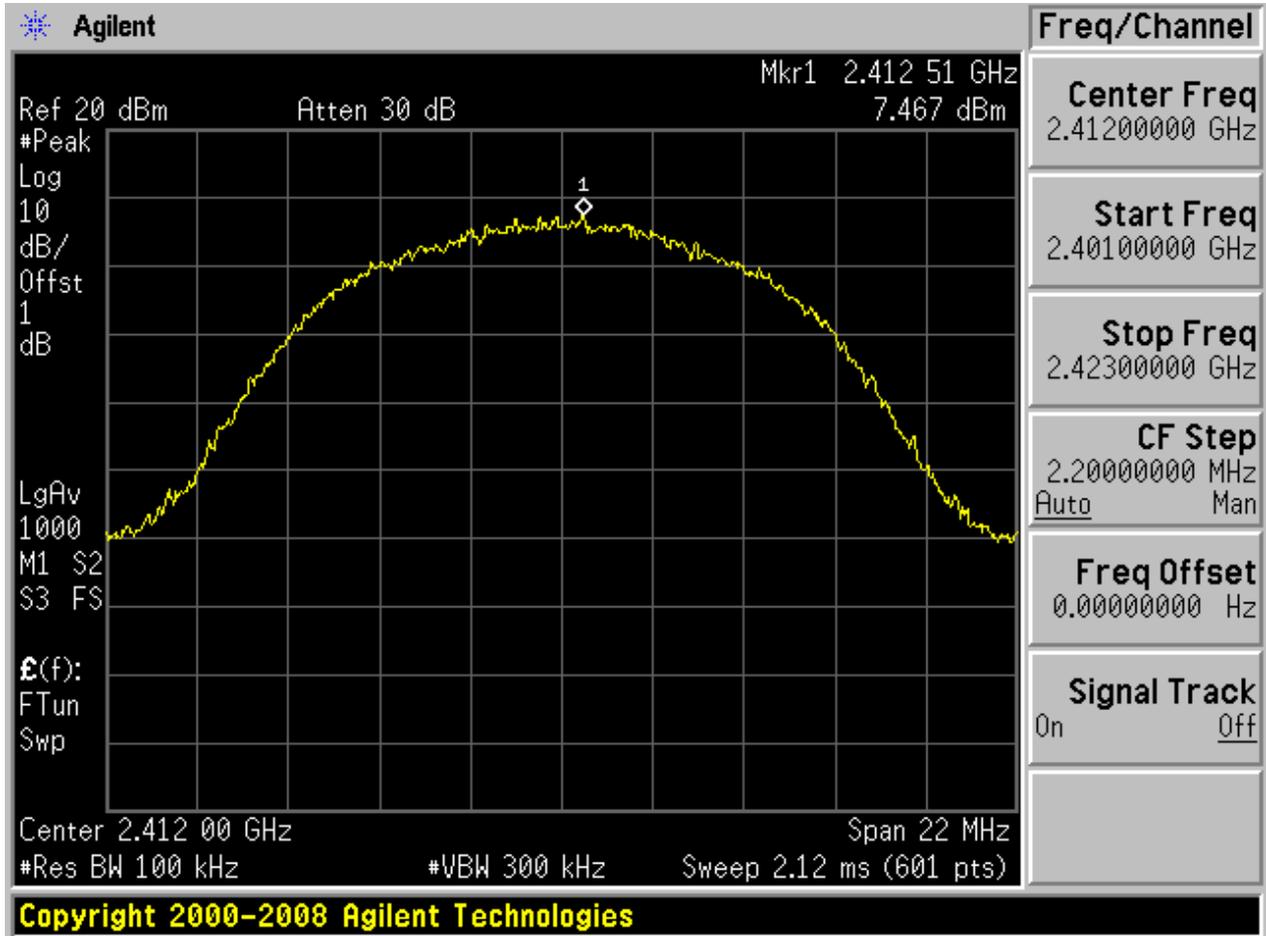




2.1.2 Puw:

9k - 150k

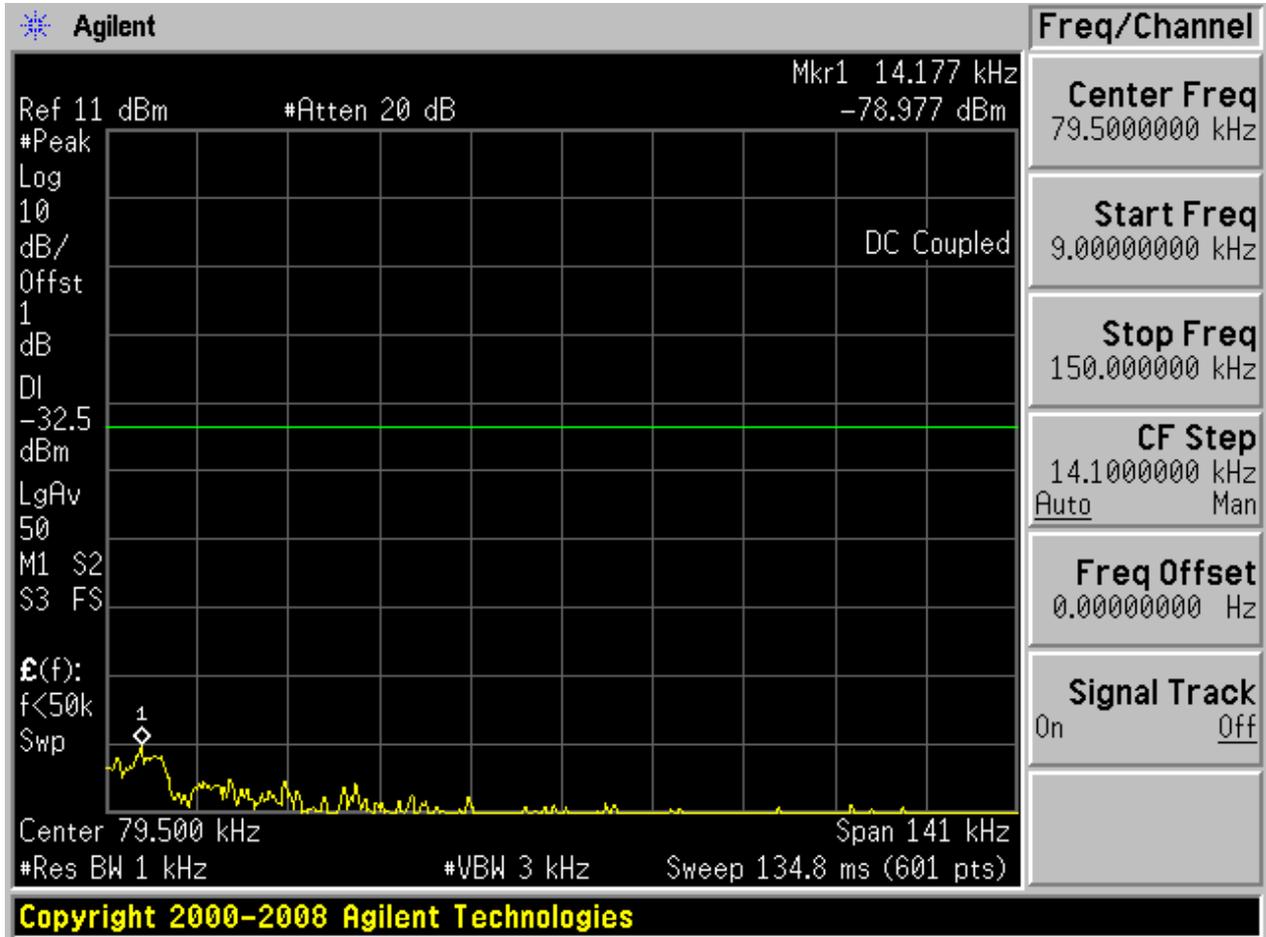




30M - 2.3G

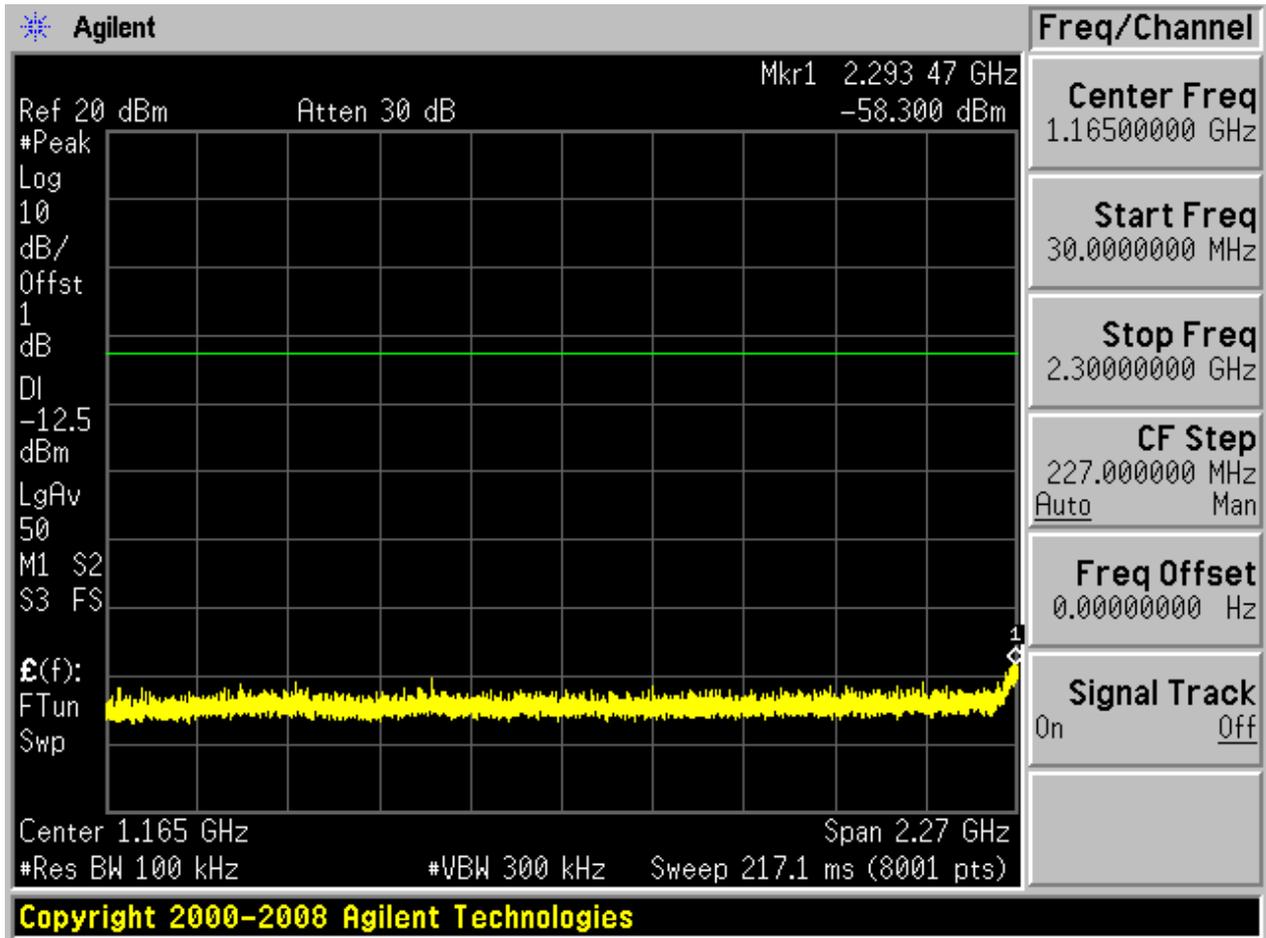




2.3G - 2.4G

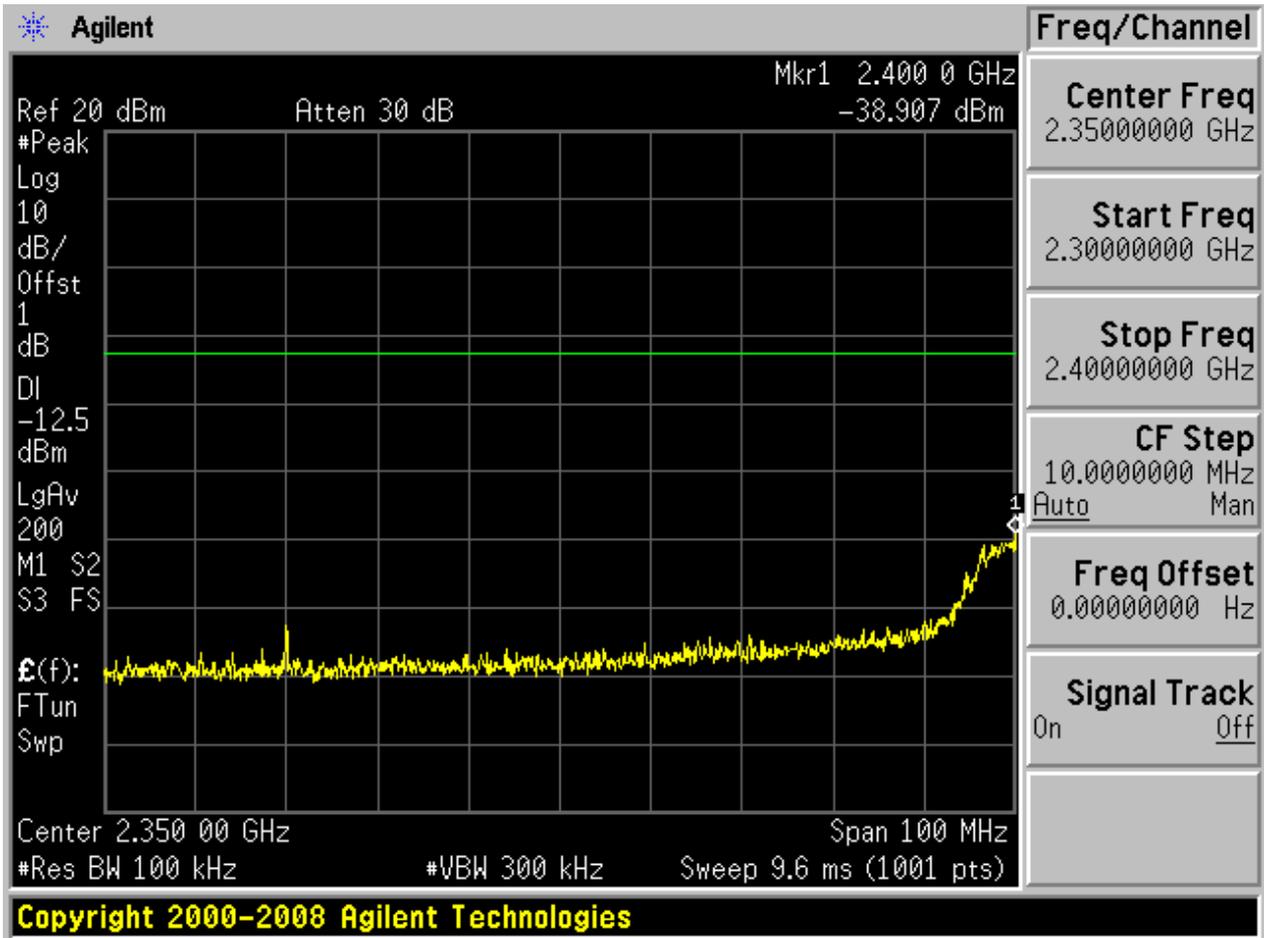




2.5G - 26.5G

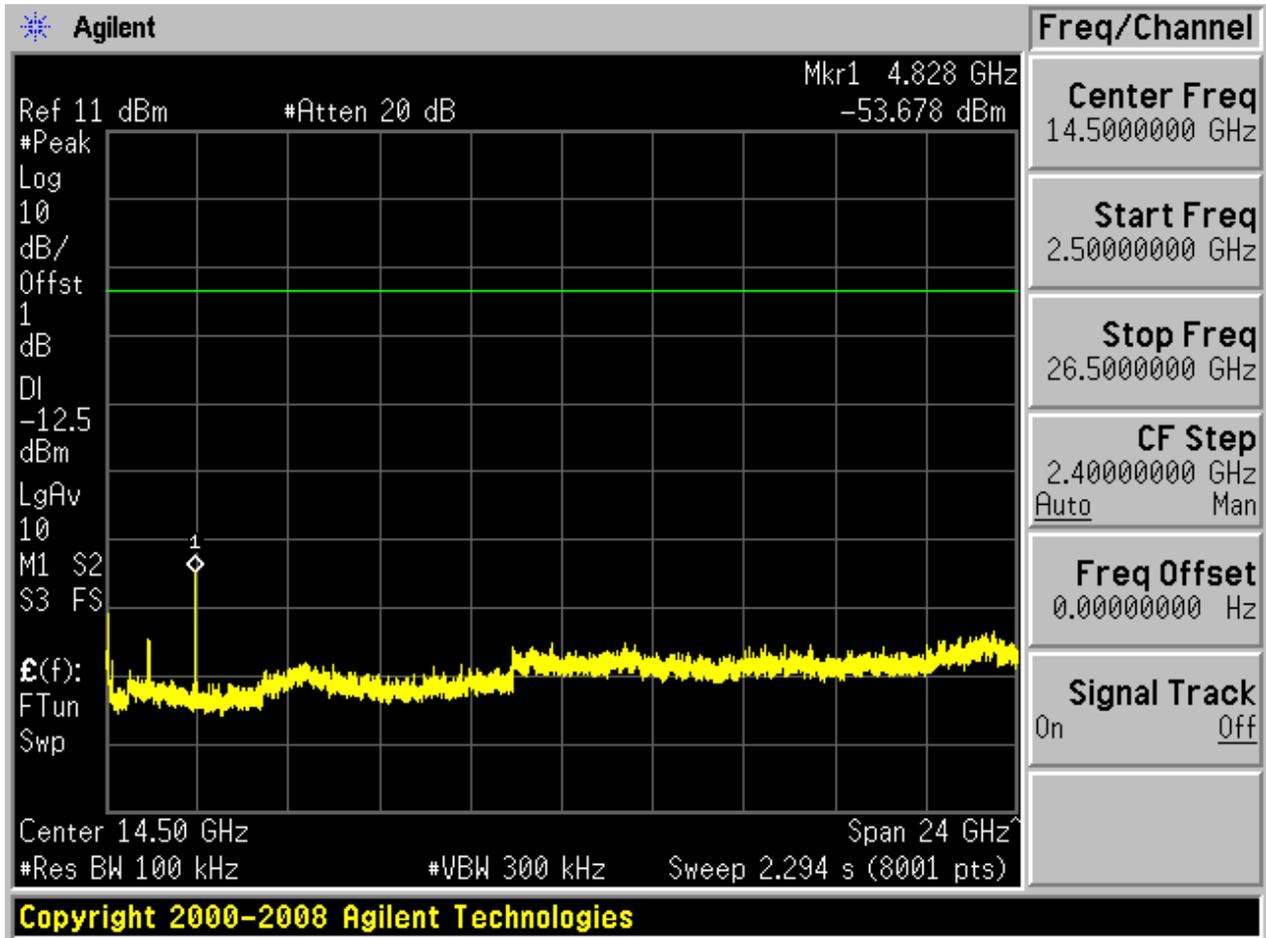



2.2 11B_M

2.2.1 Pref:

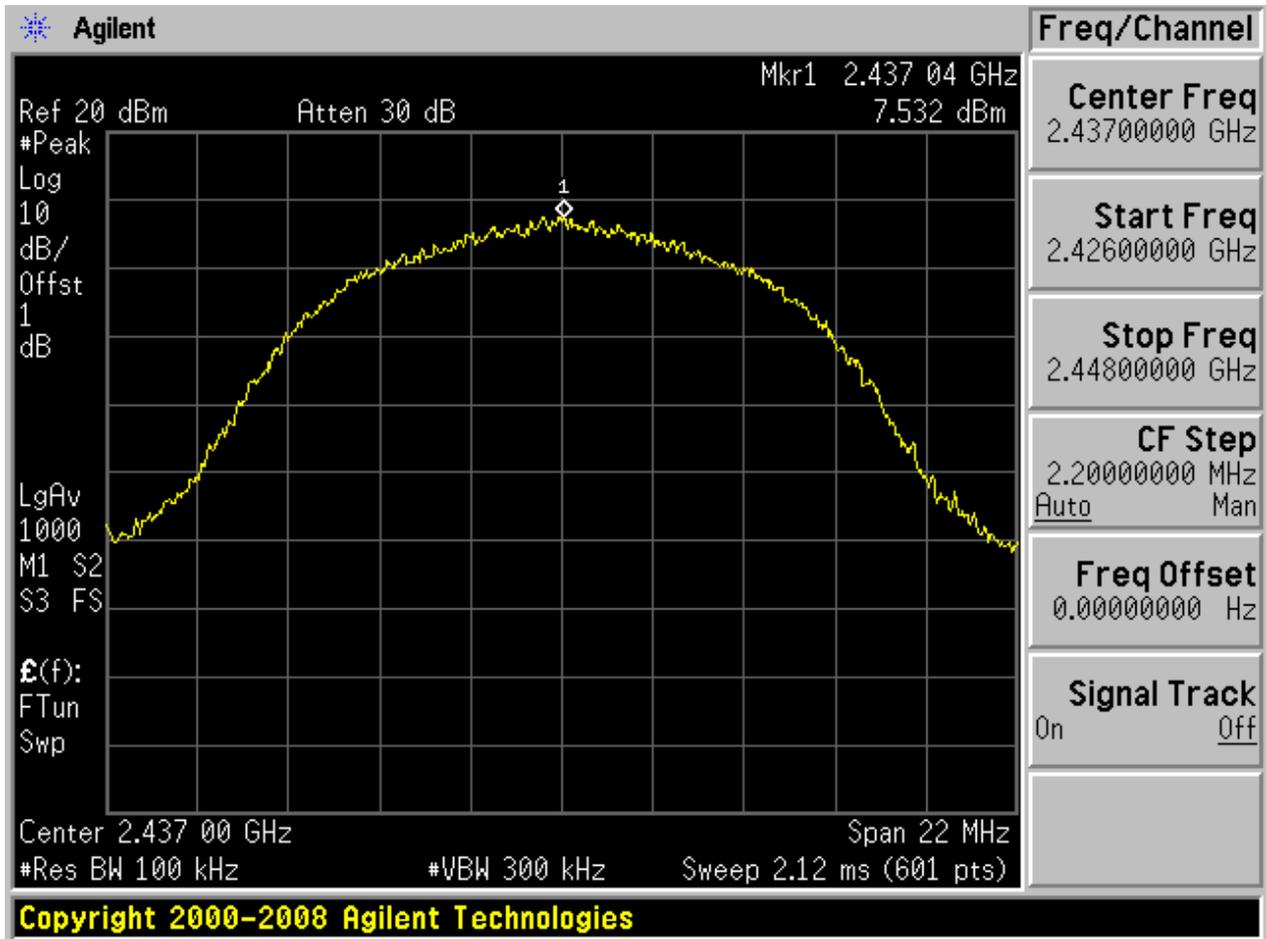




2.2.2 Puw:

9k - 150k






30M - 2.3G

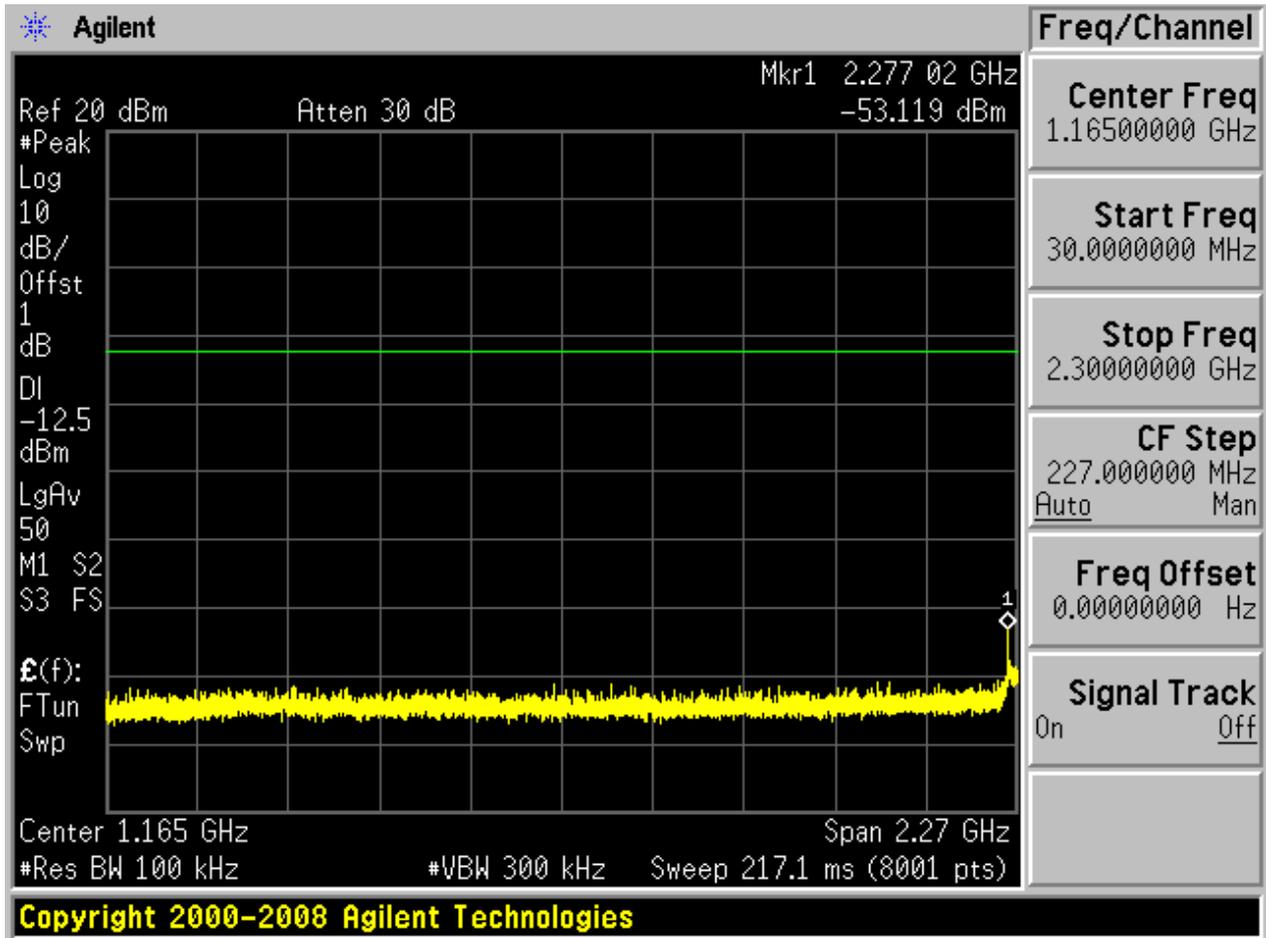




2.3G - 2.4G

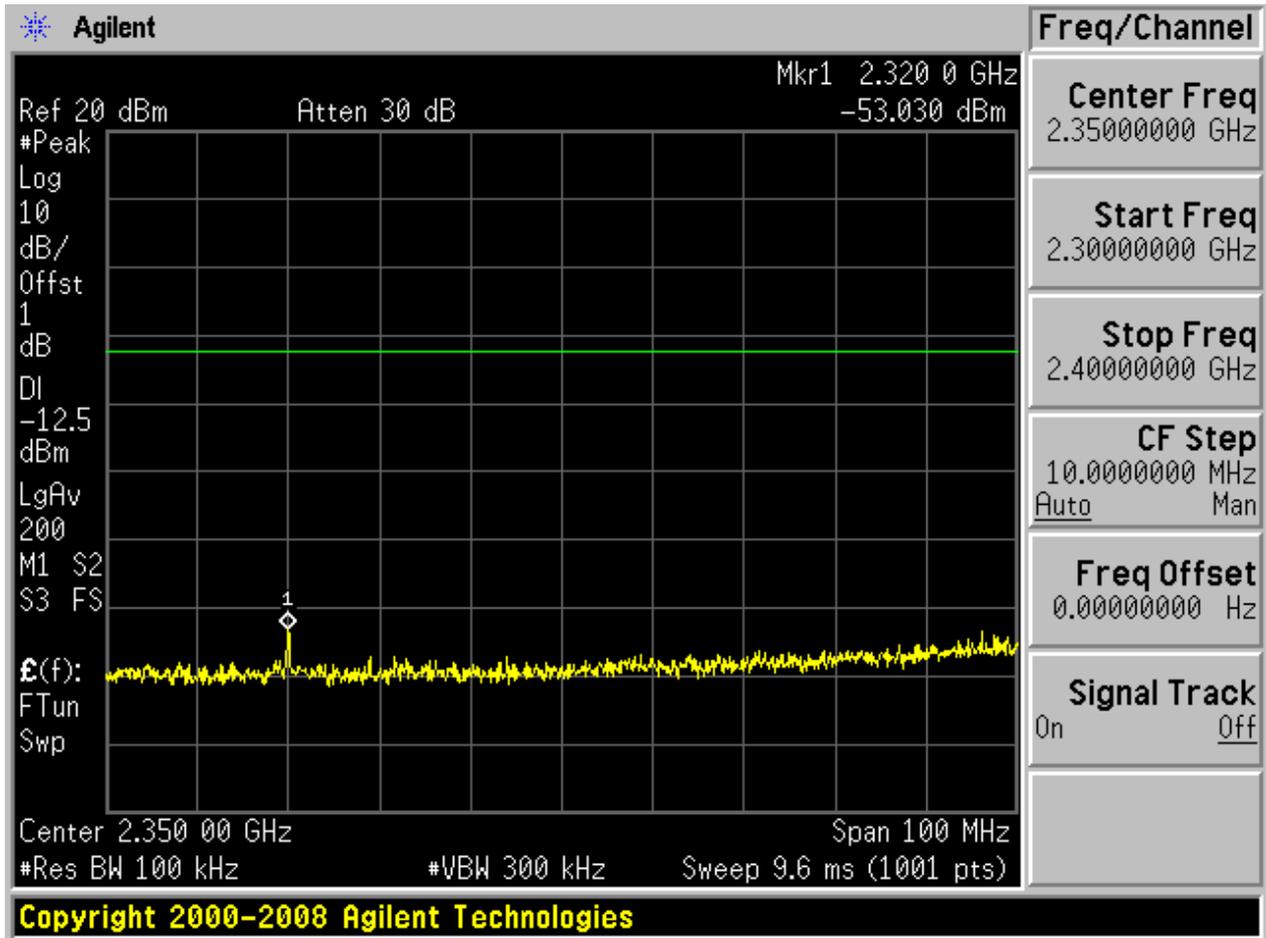




2.4835G - 2.5G

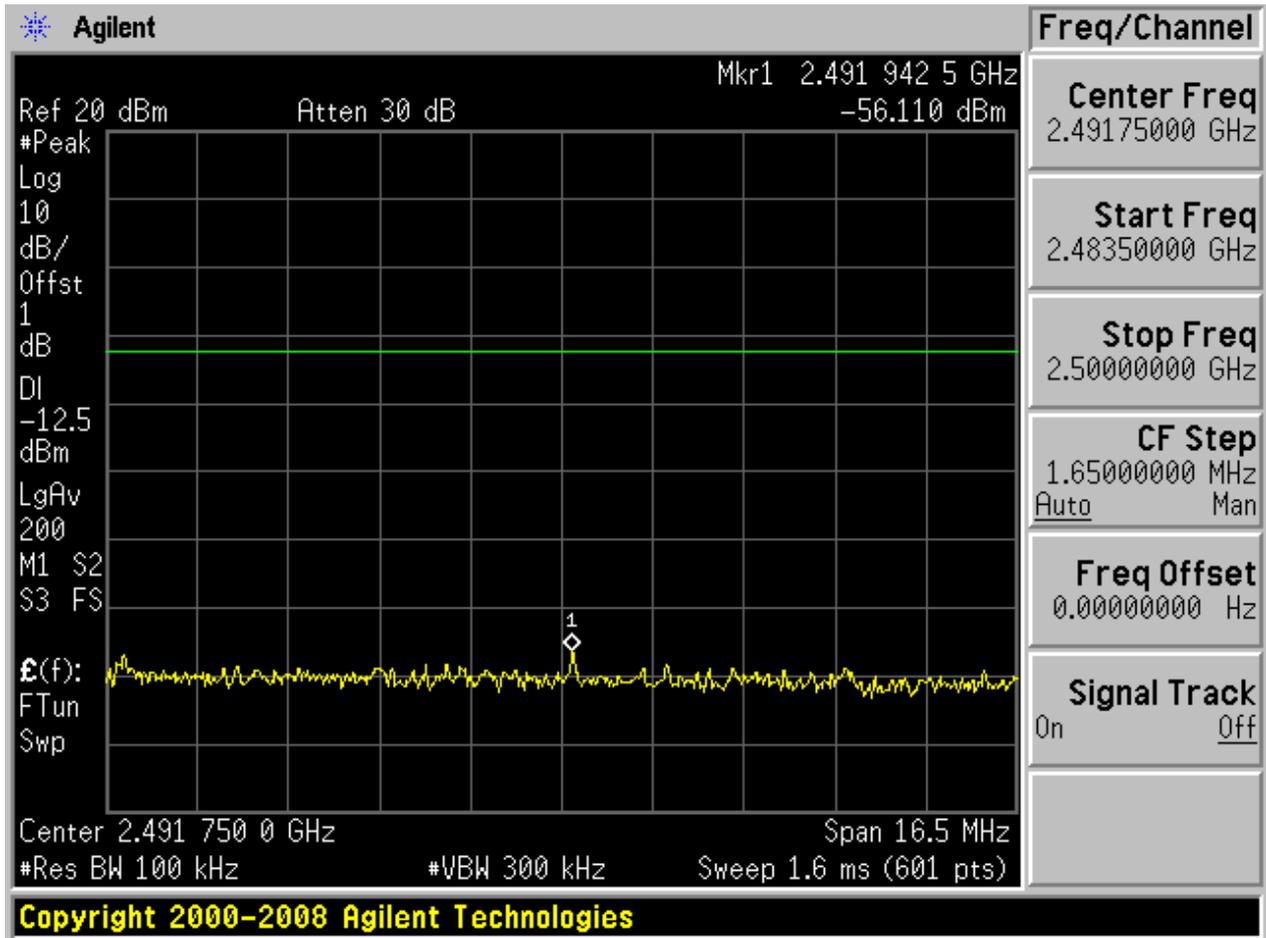




2.5G - 26.5G

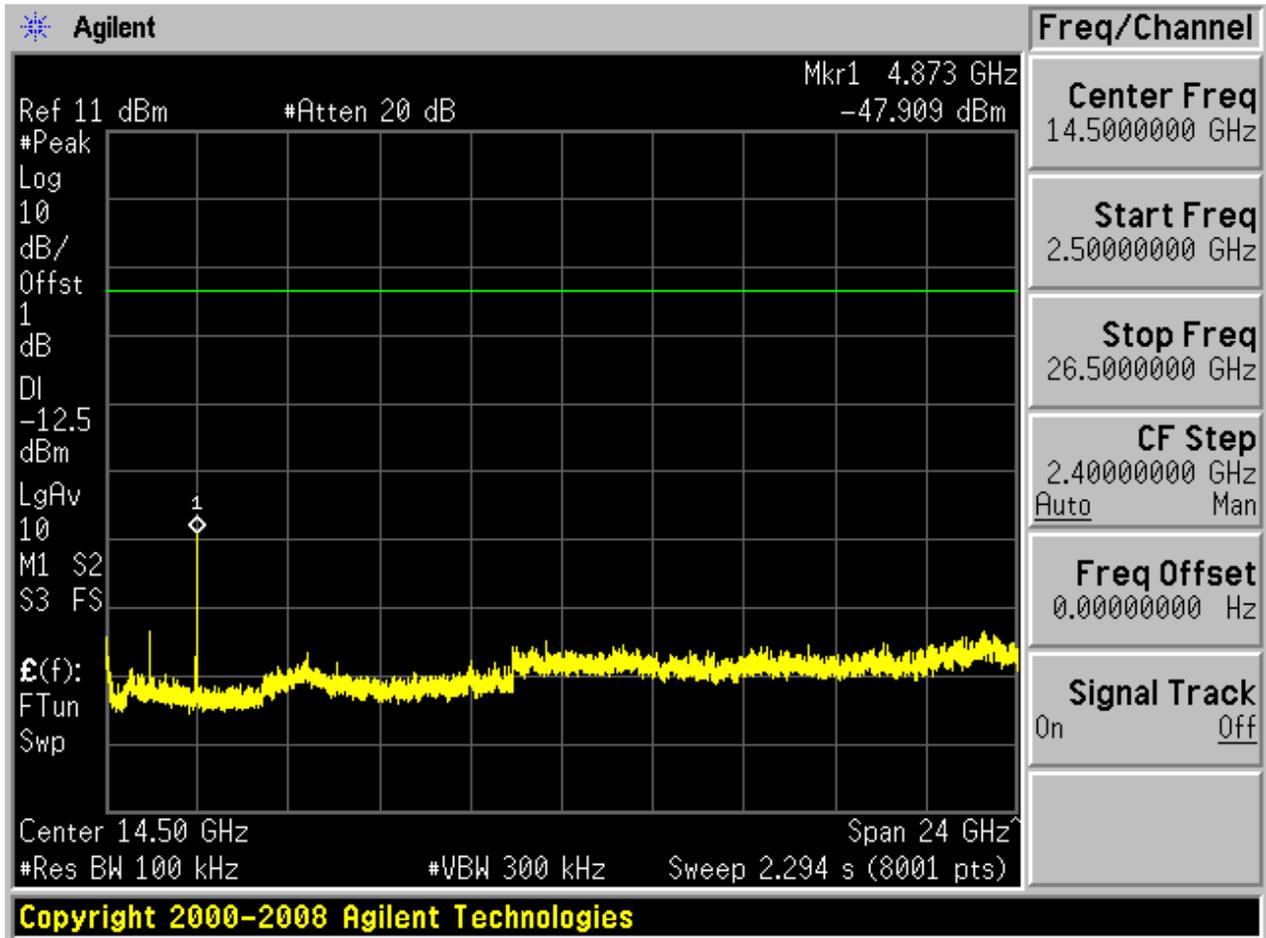



2.3 11B_T

2.3.1 Pref:

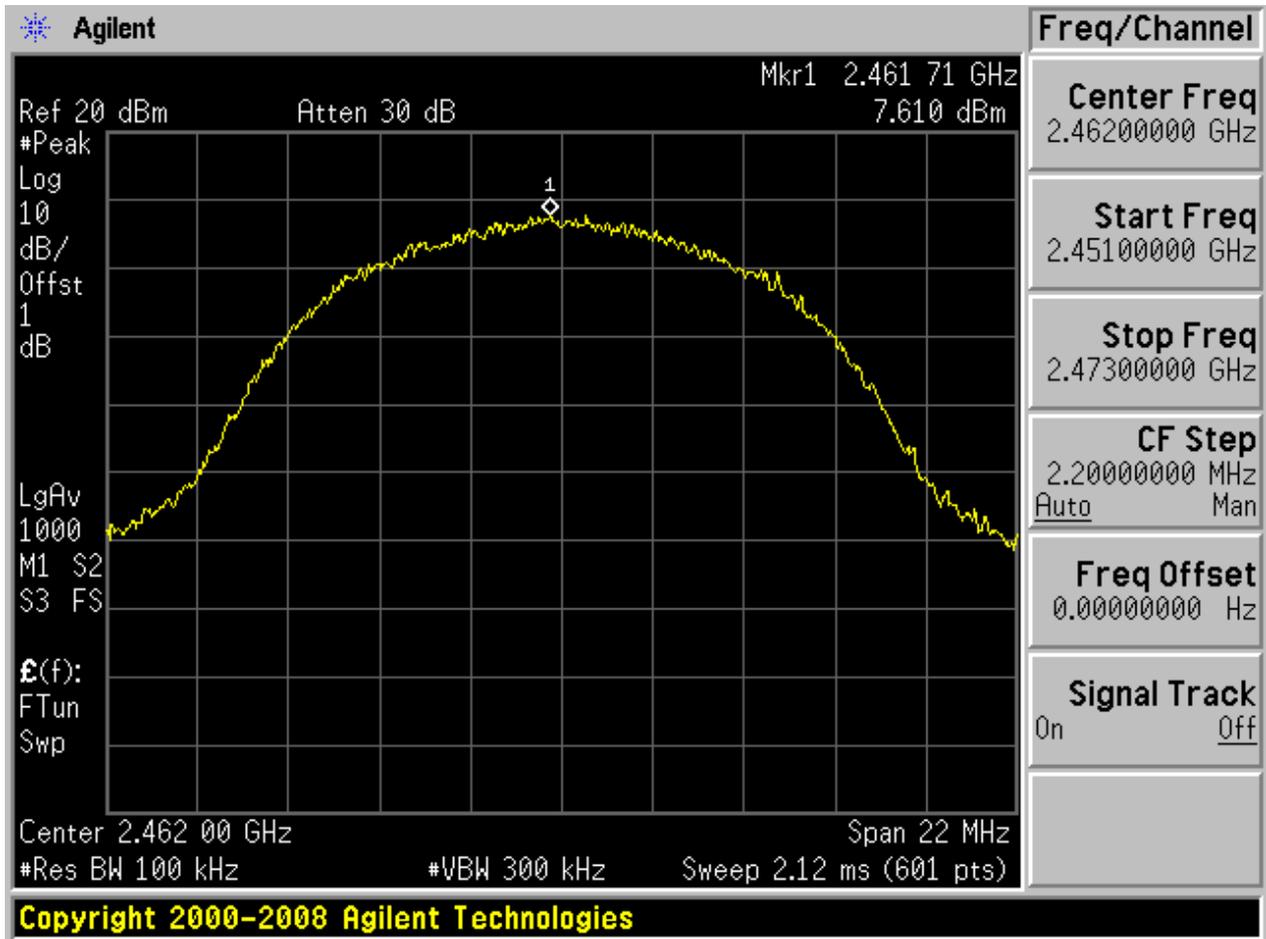




2.3.2 Puw:

9k - 150k






30M - 2.3G

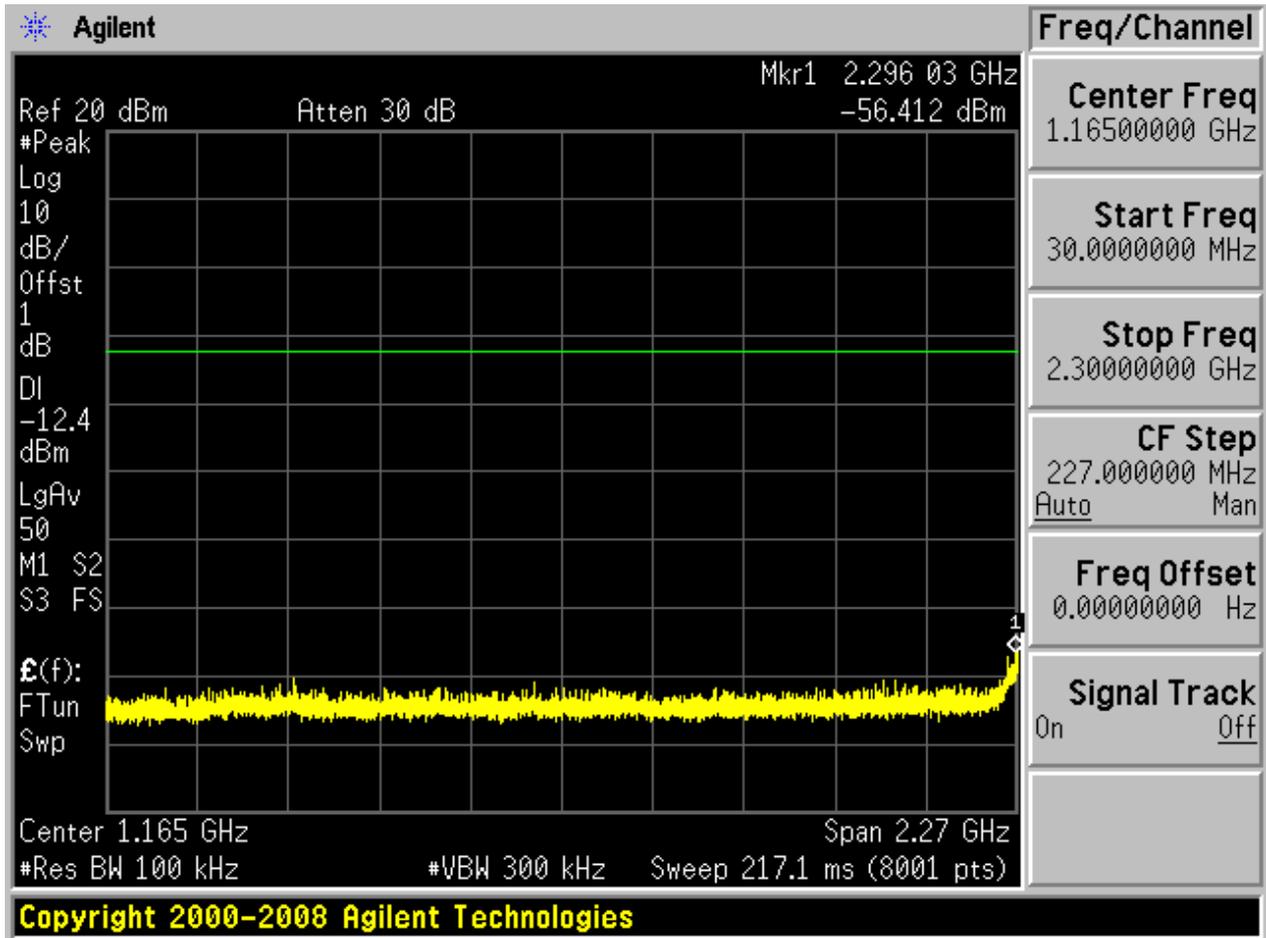




2.3G - 2.4G

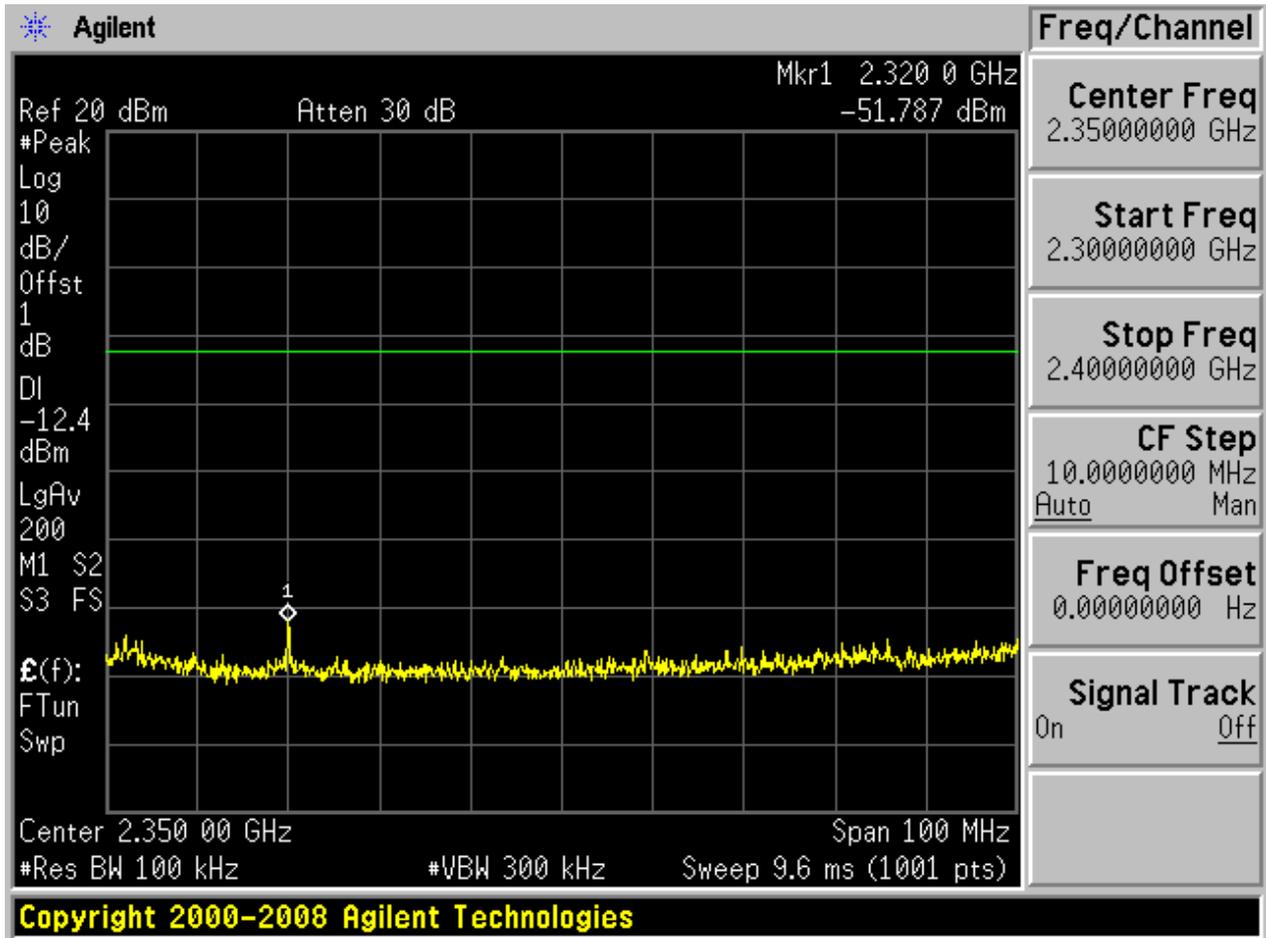




2.4835G - 2.5G

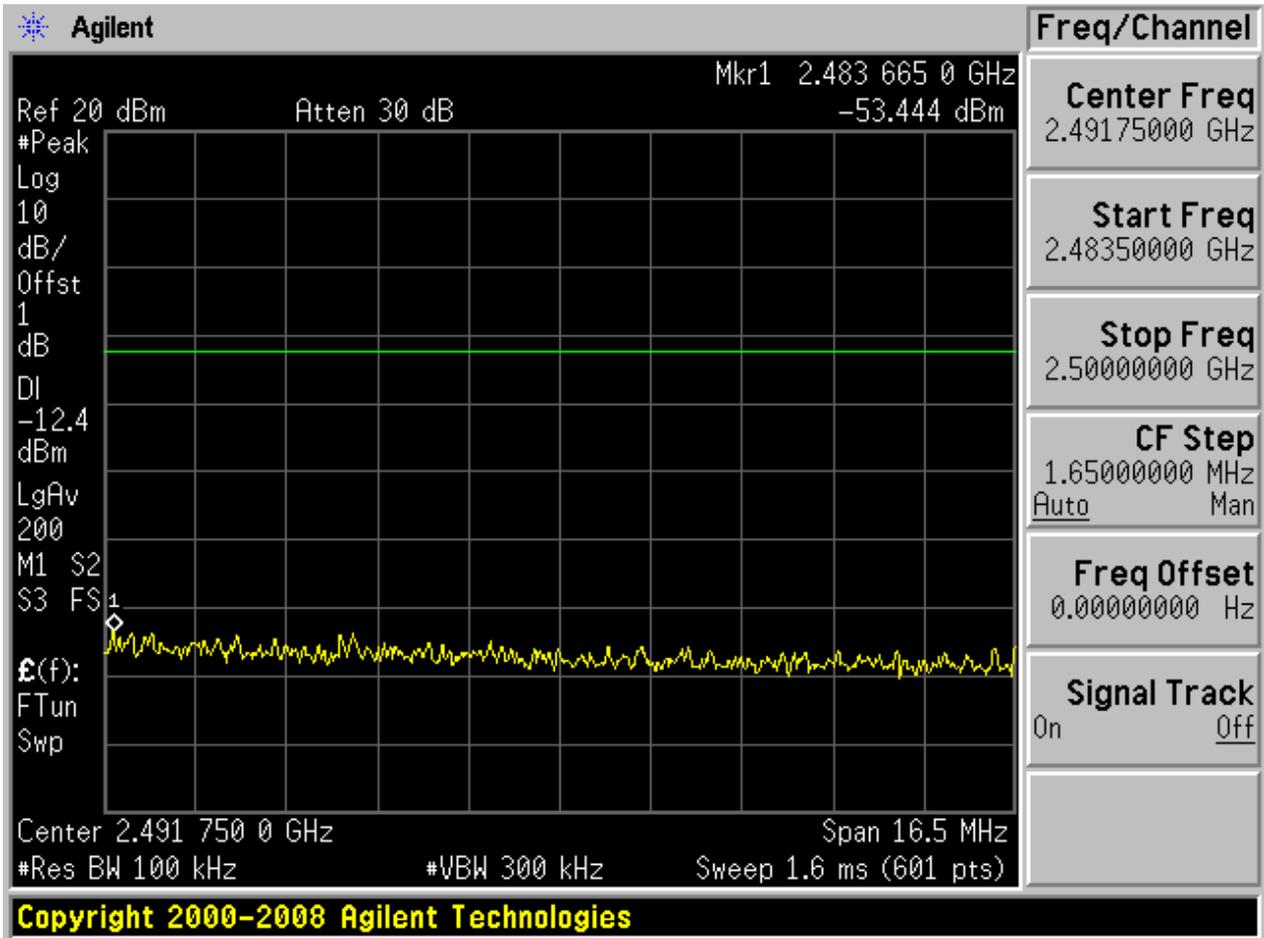




2.5G - 26.5G

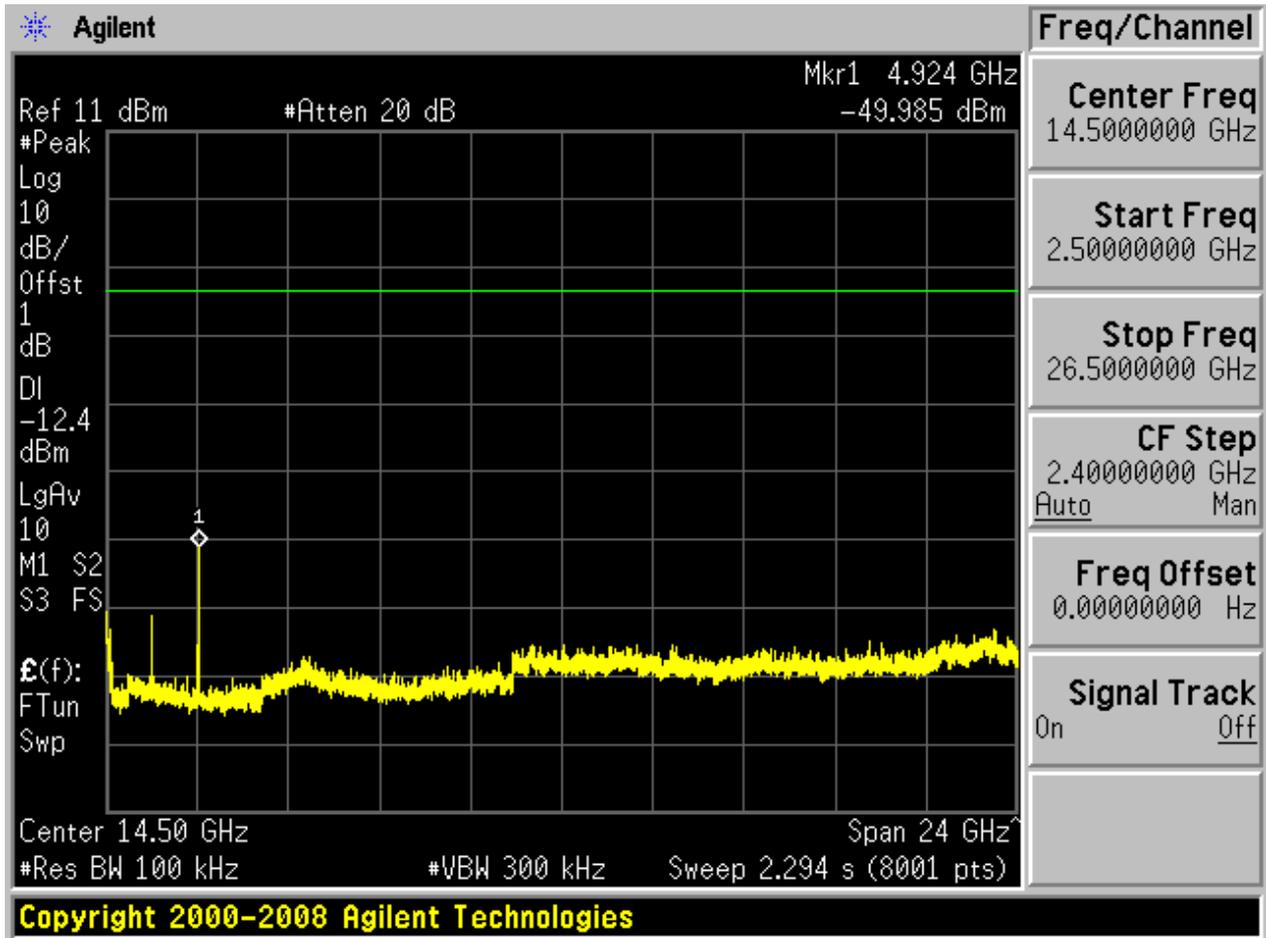



2.4 11G_B


2.4.1 Pref:

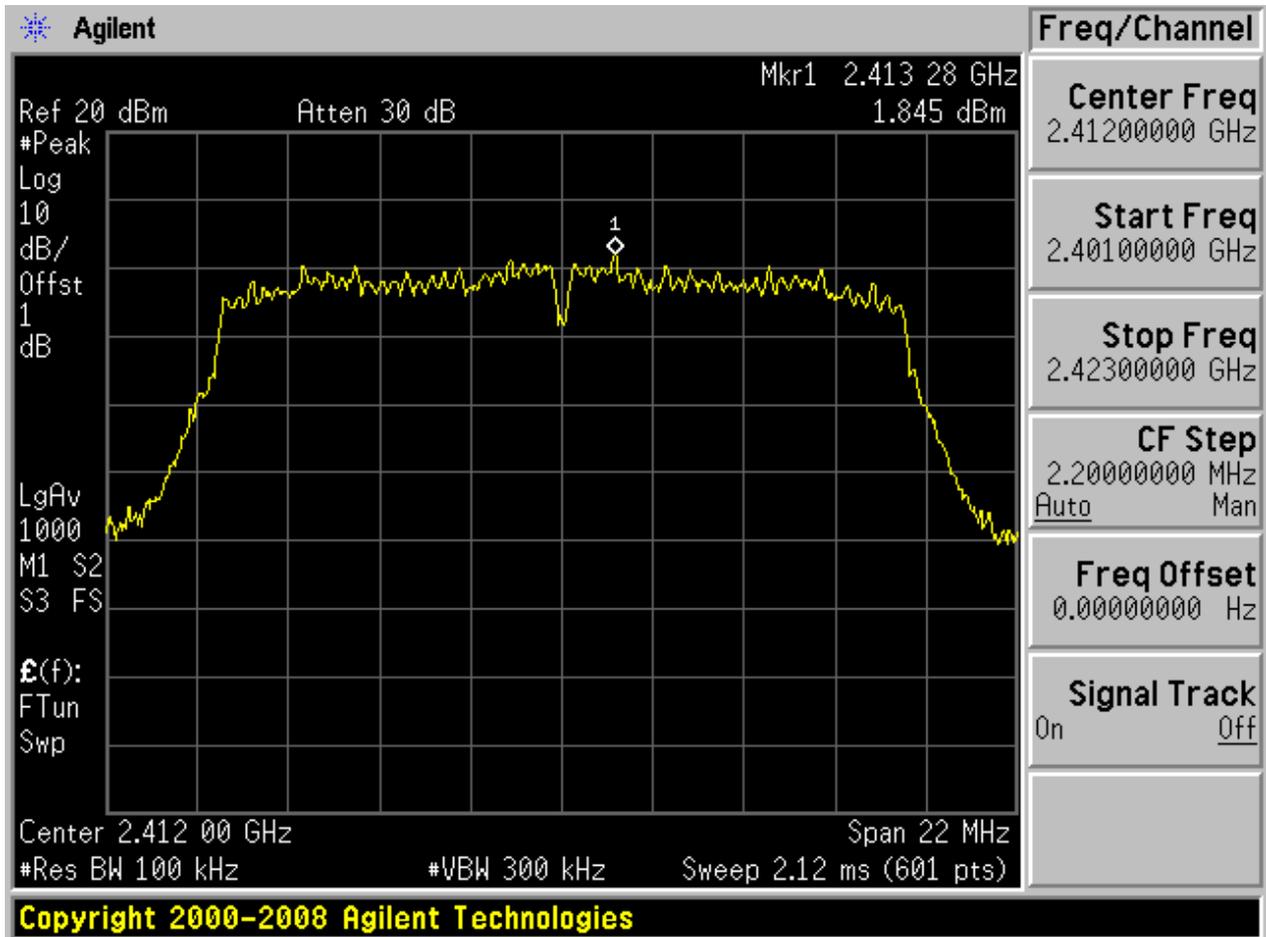




2.4.2 Puw:

9k - 150k

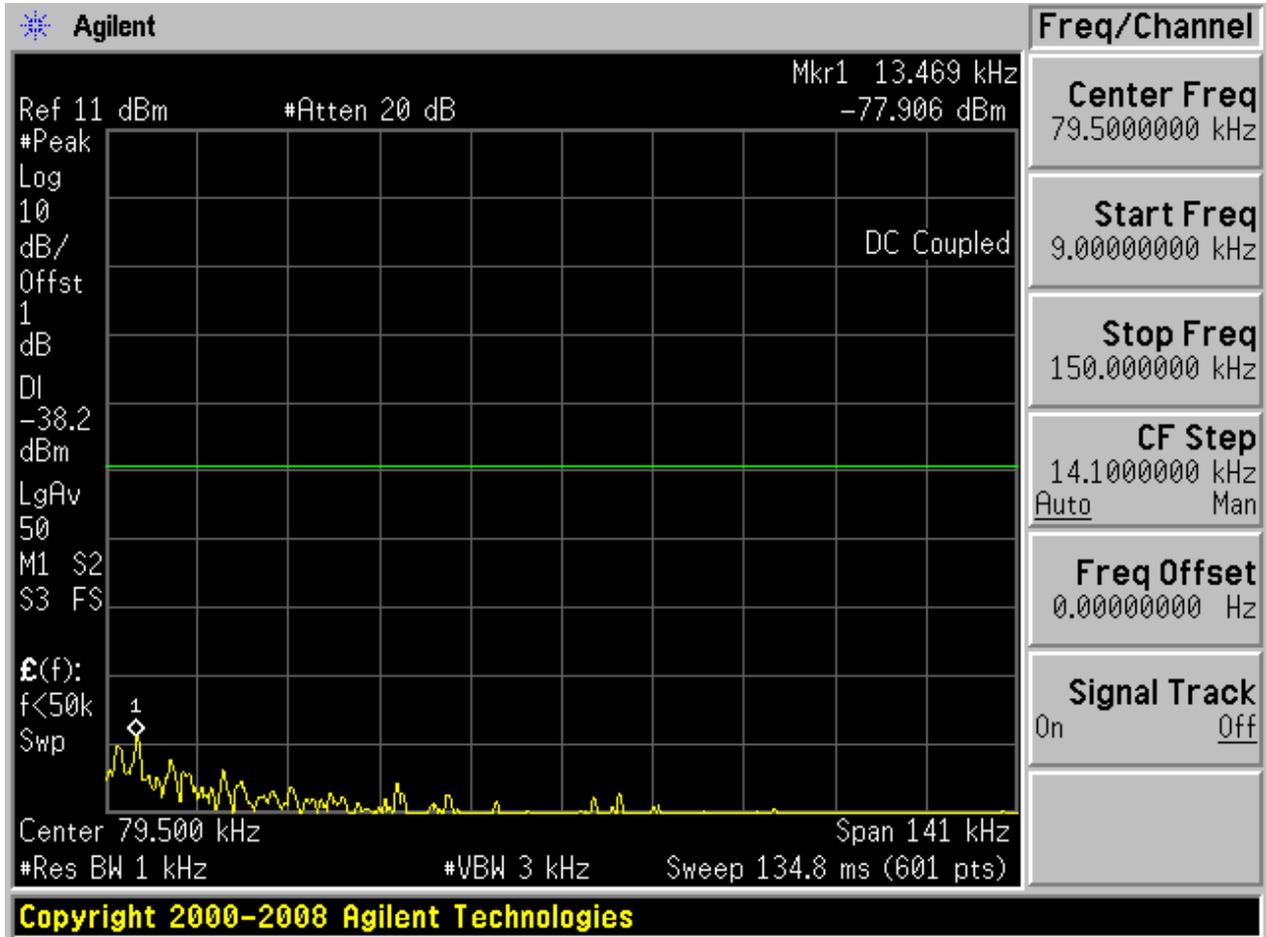




30M - 2.3G

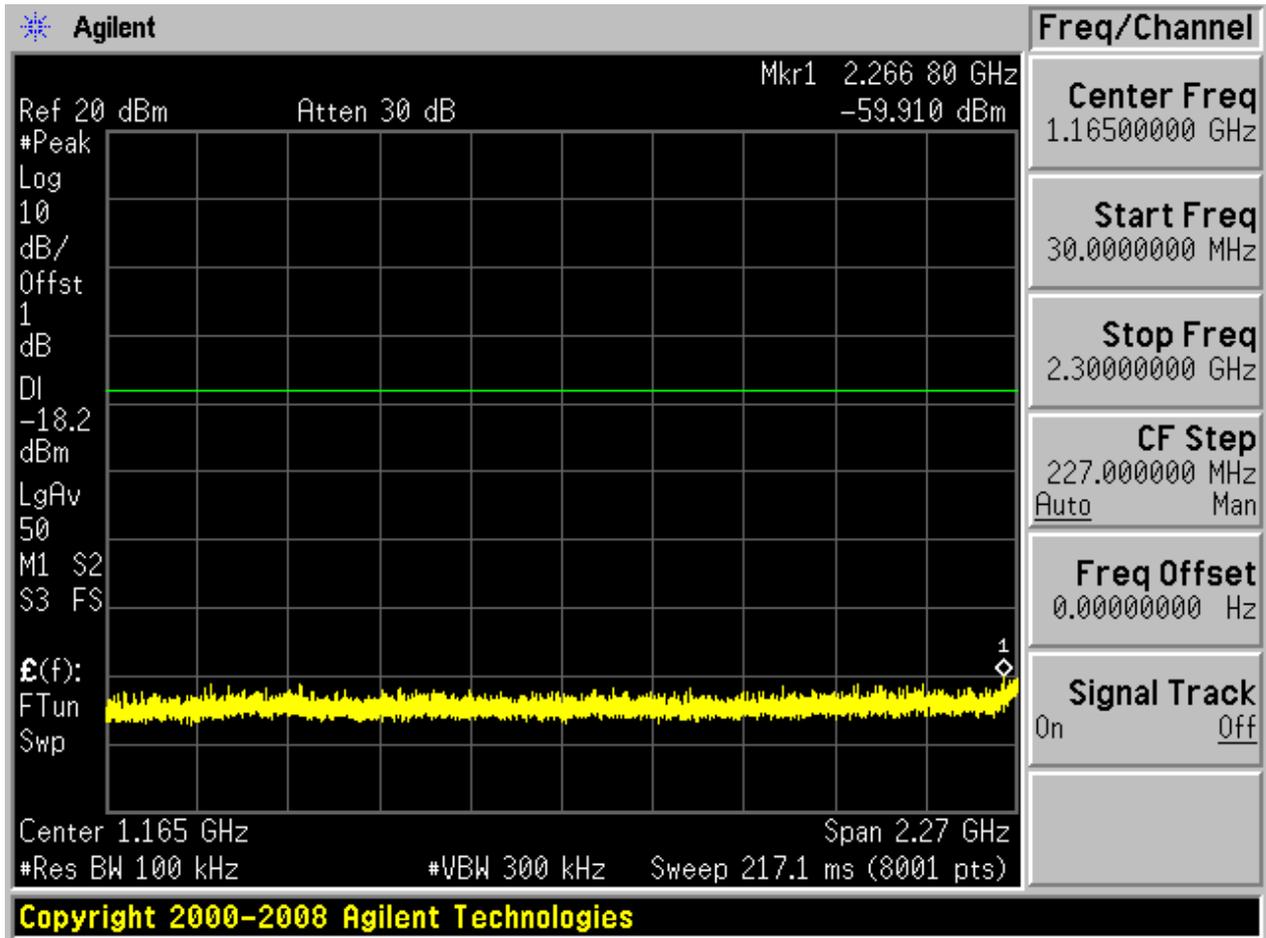




2.4835G - 2.5G

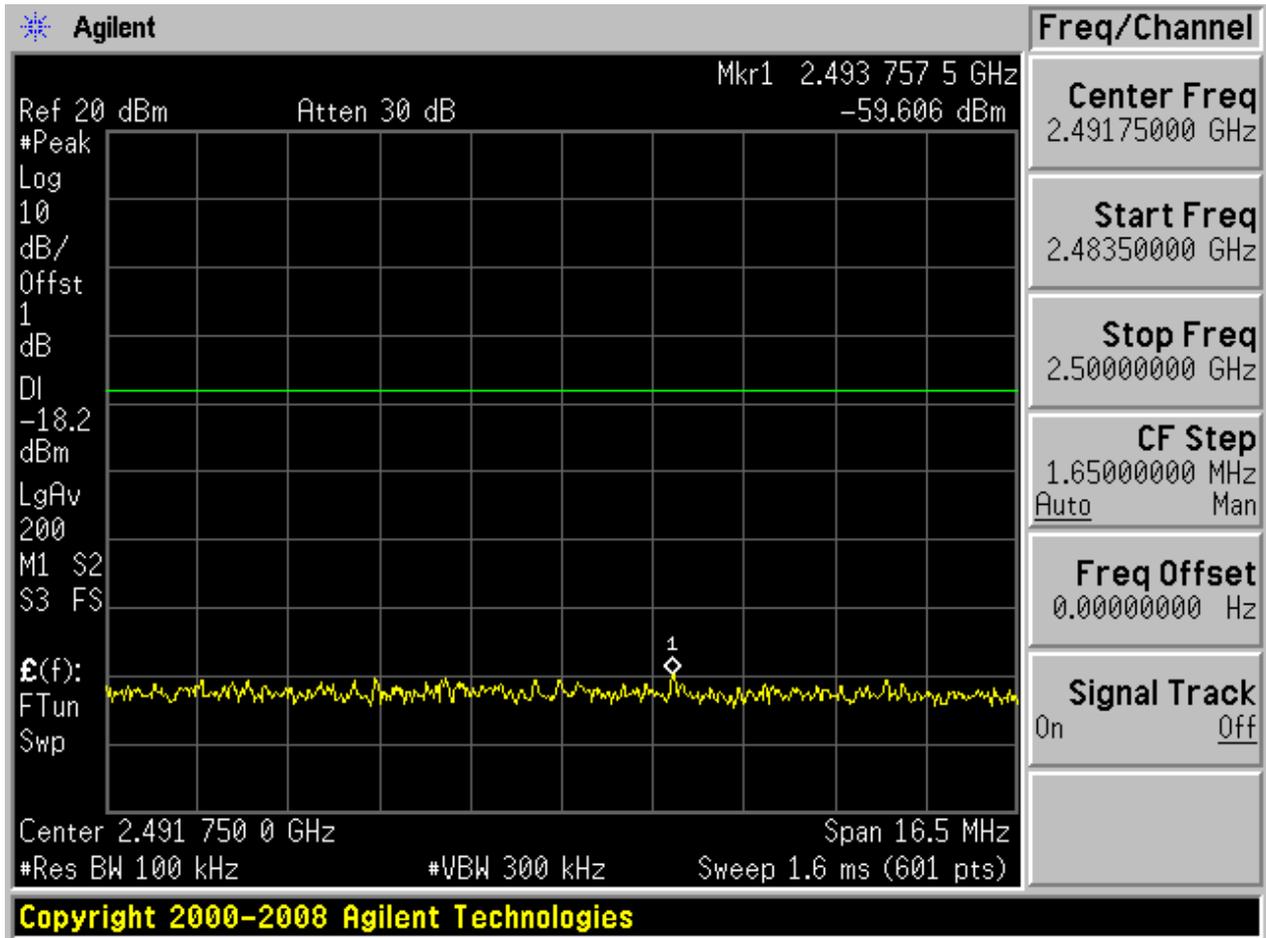




2.5G - 26.5G

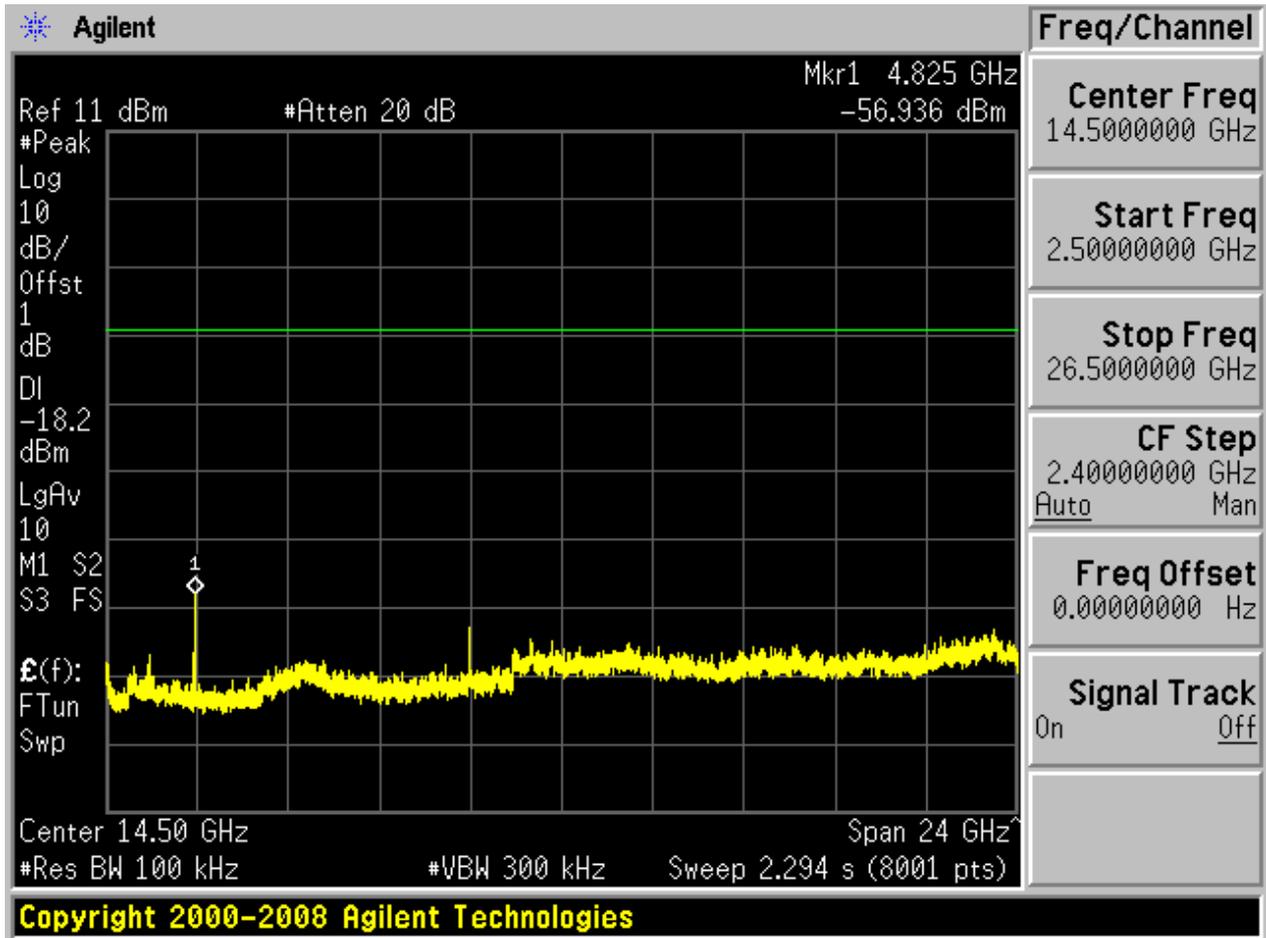



2.5 11G_M


2.5.1 Pref:

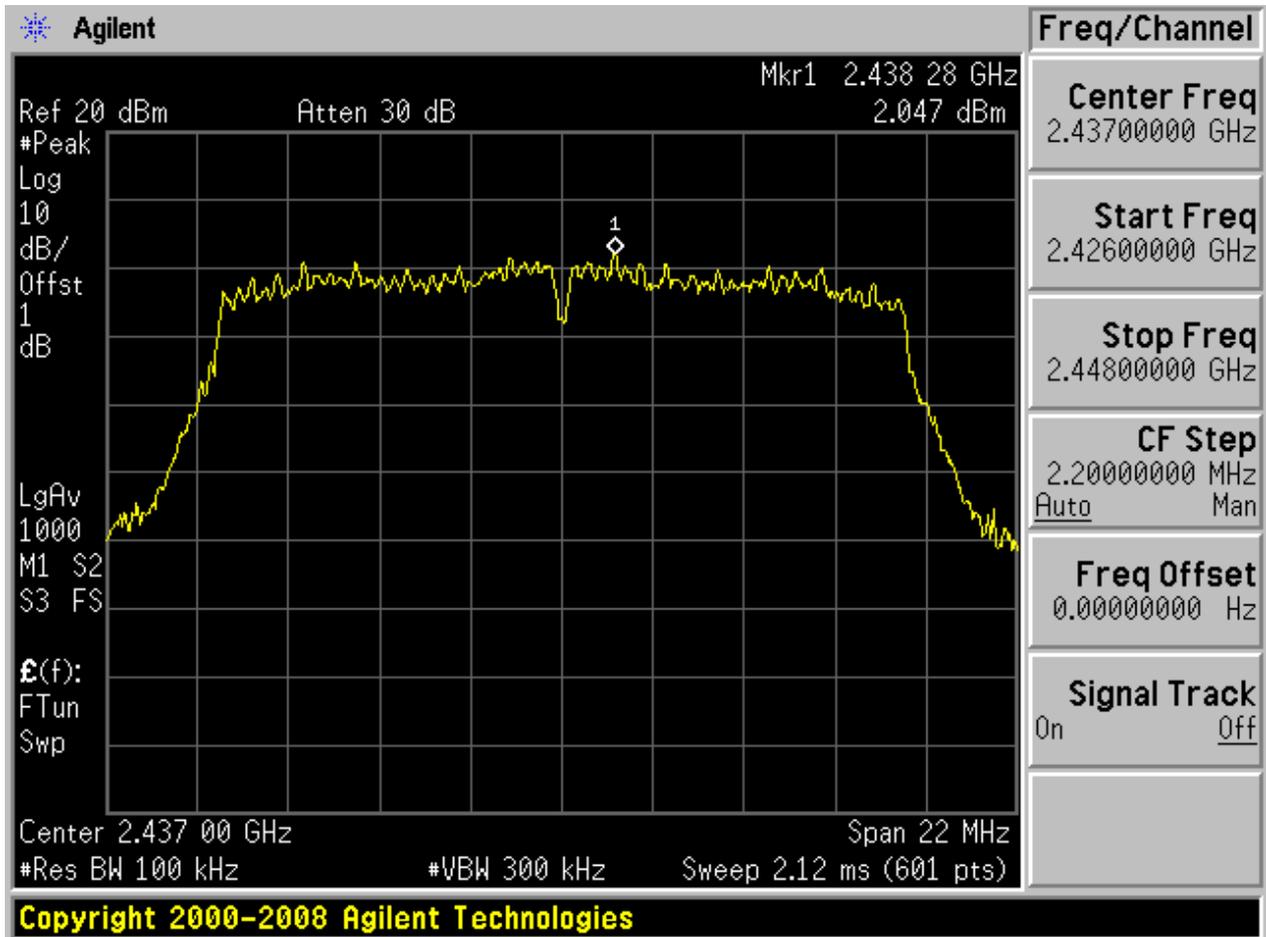




2.5.2 Puw:

9k - 150k

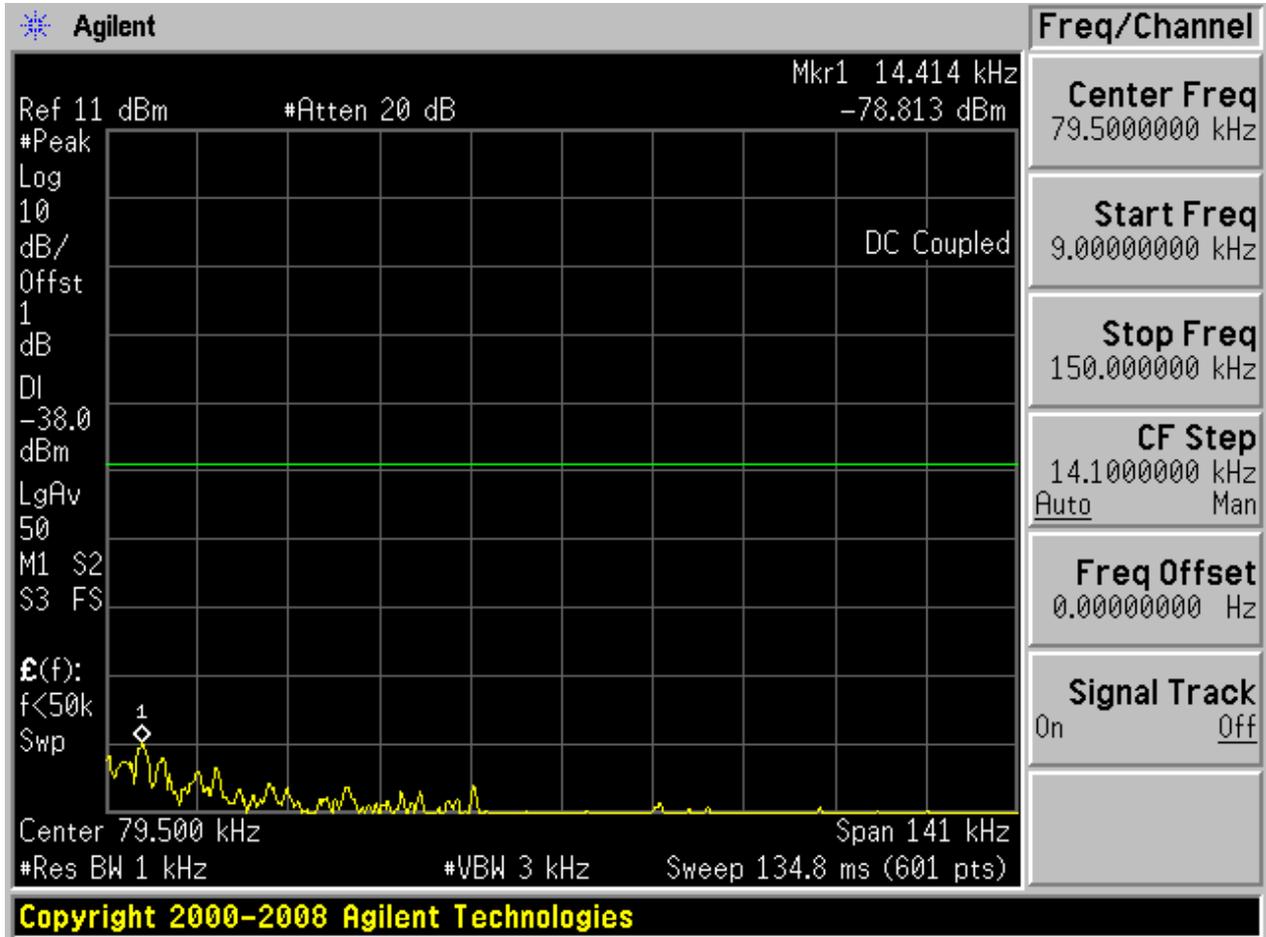




30M - 2.3G

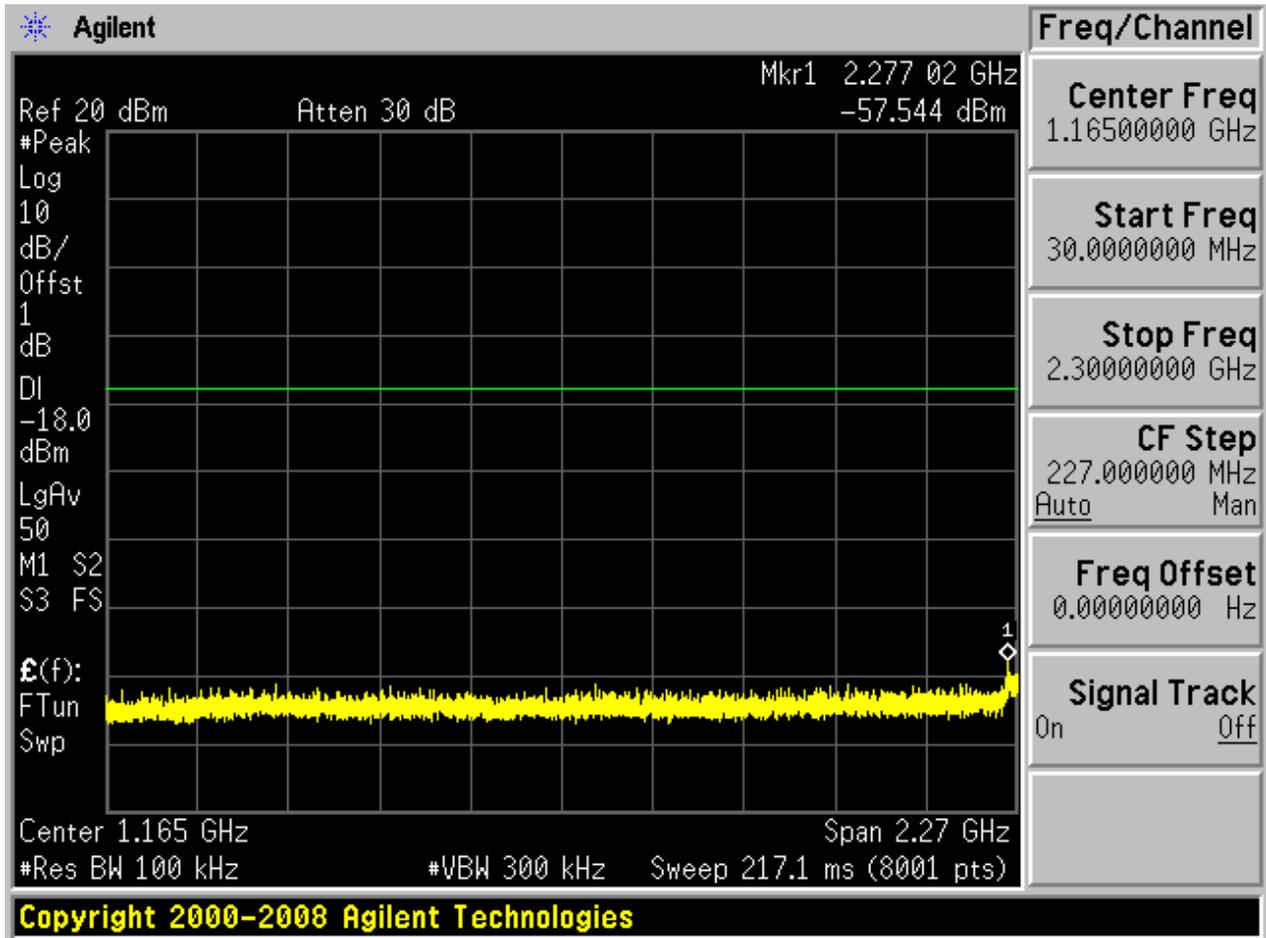




2.3G - 2.4G

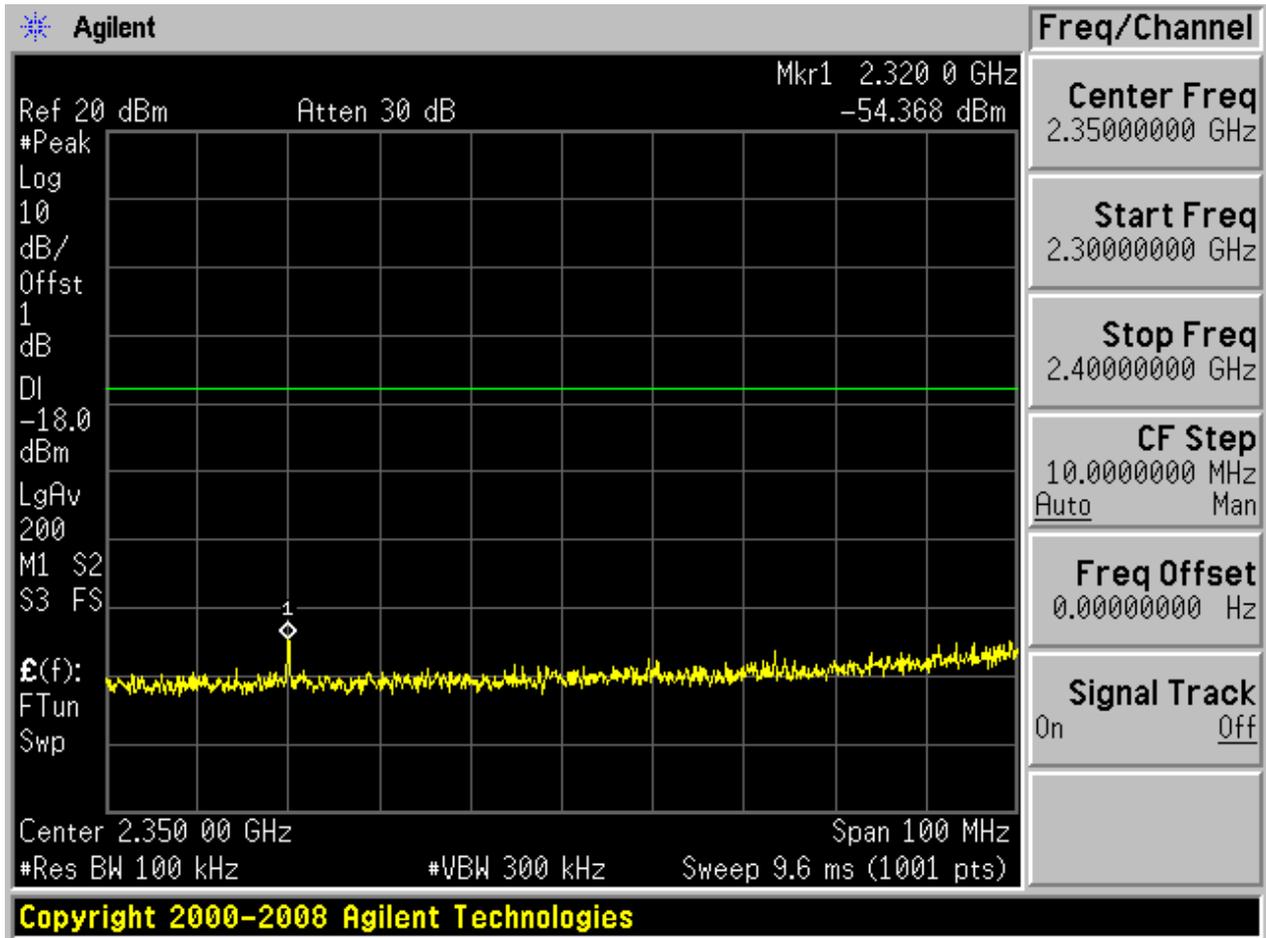




2.5G - 26.5G

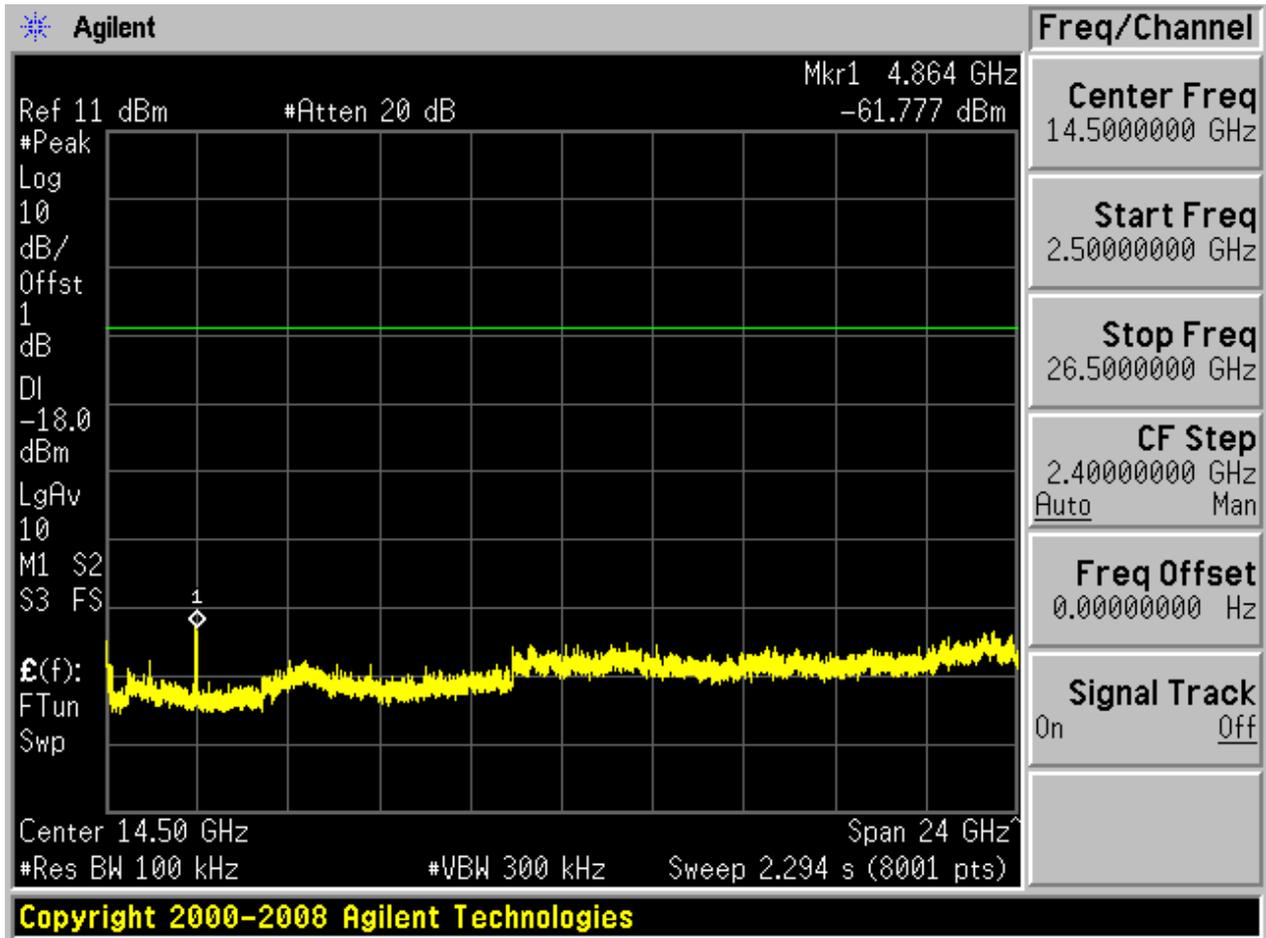

2.6 11G_T


2.6.1 Pref:

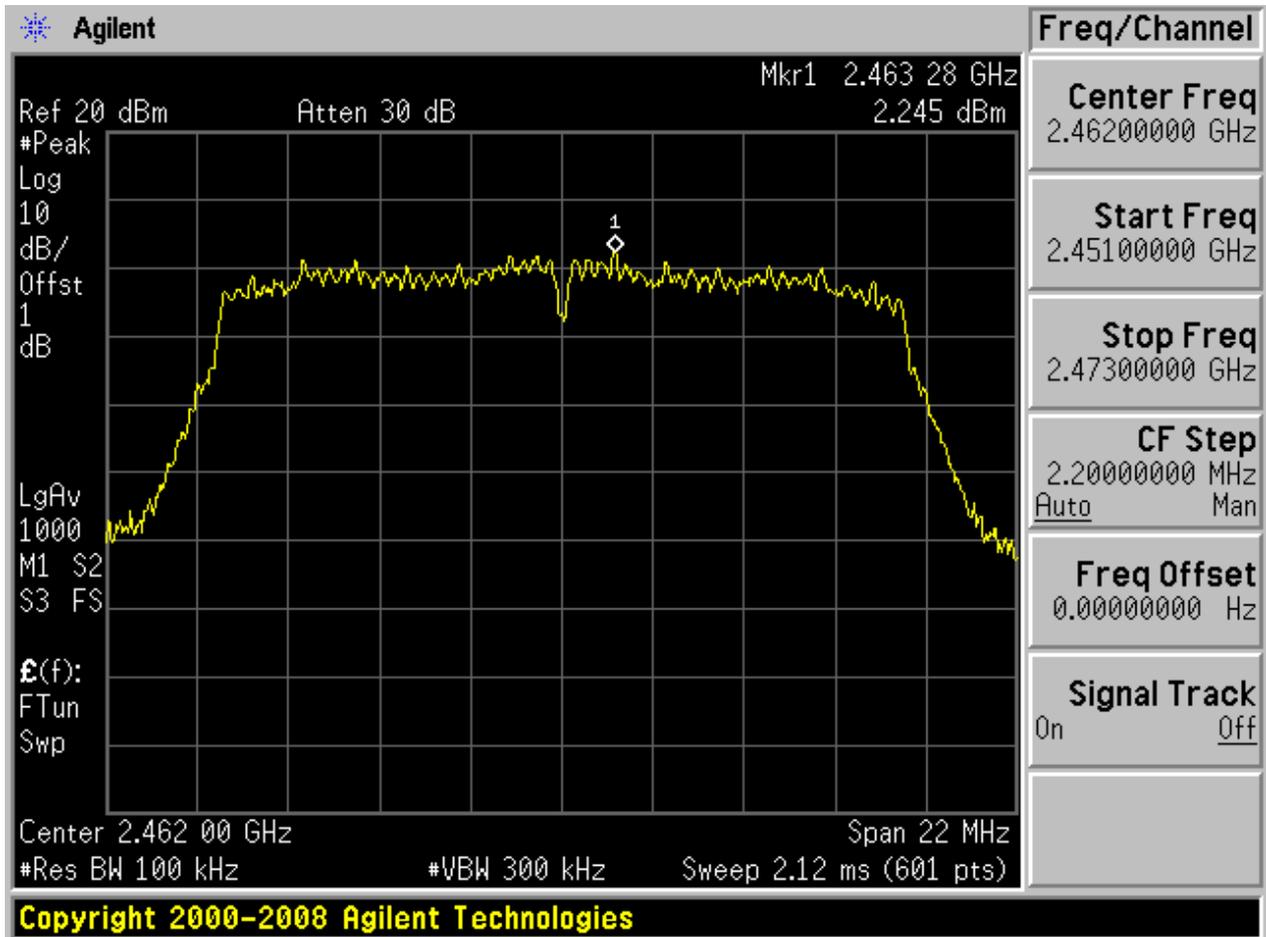




2.6.2 Puw:

9k - 150k

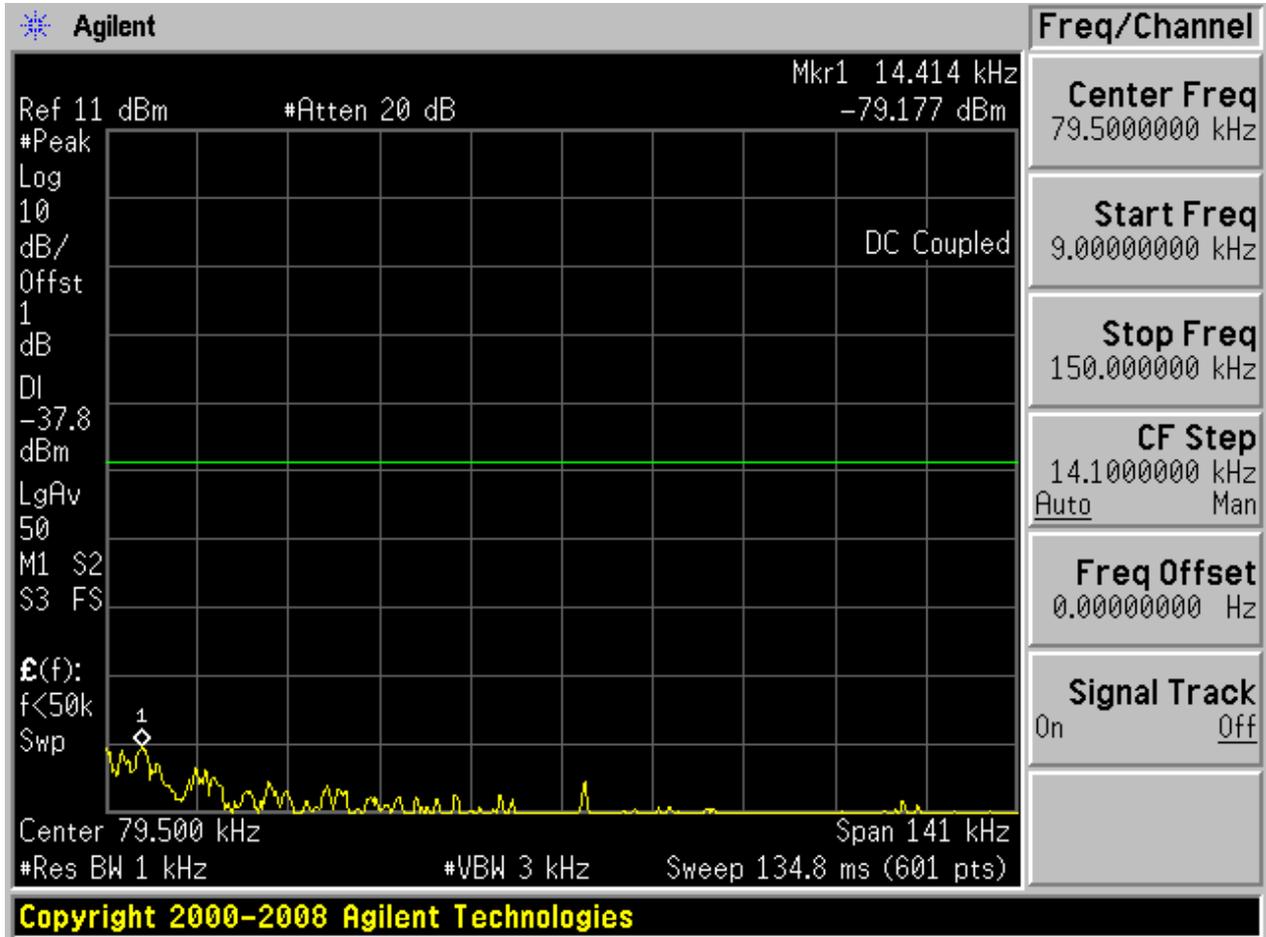




30M - 2.3G

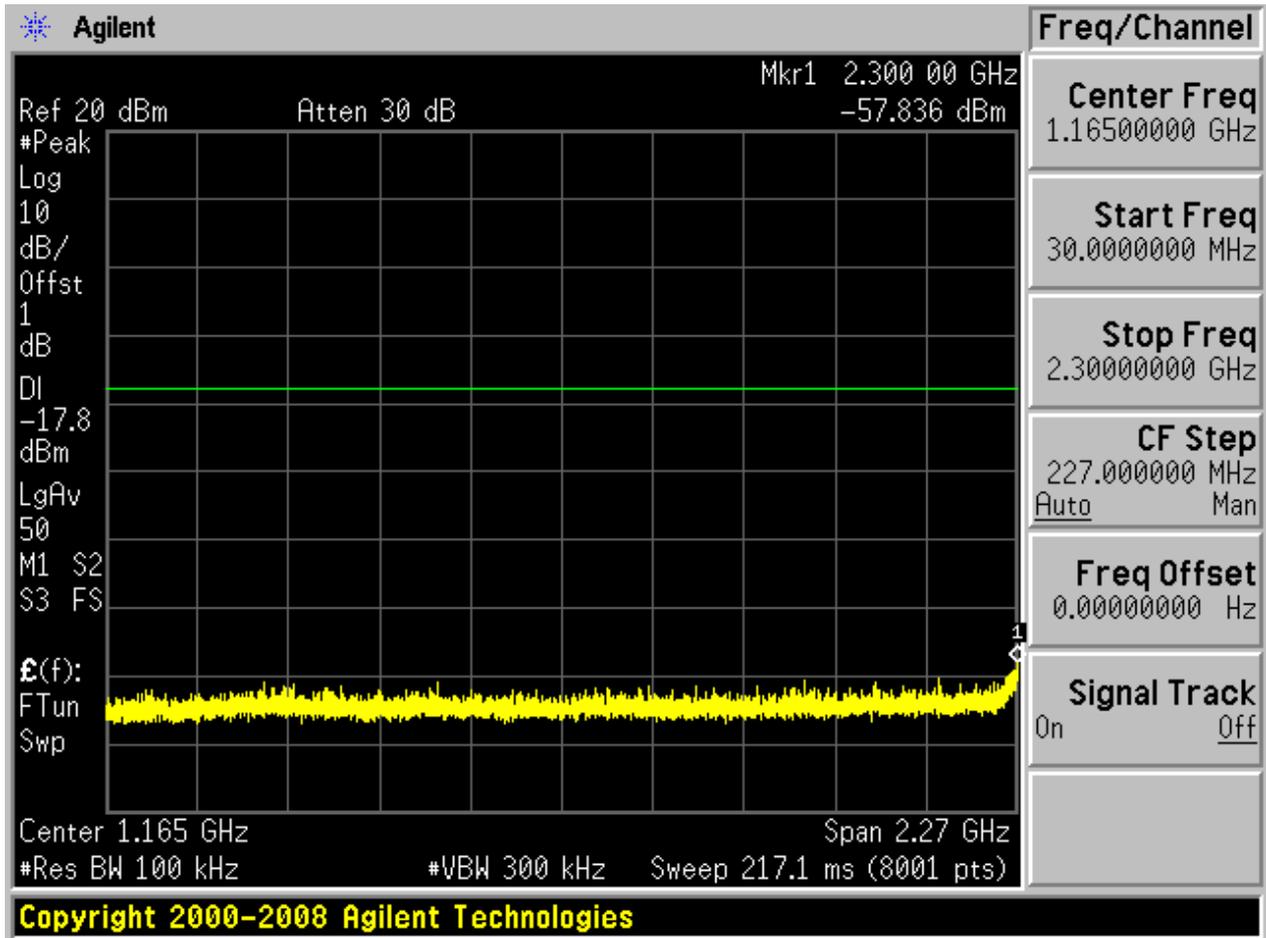




2.3G - 2.4G

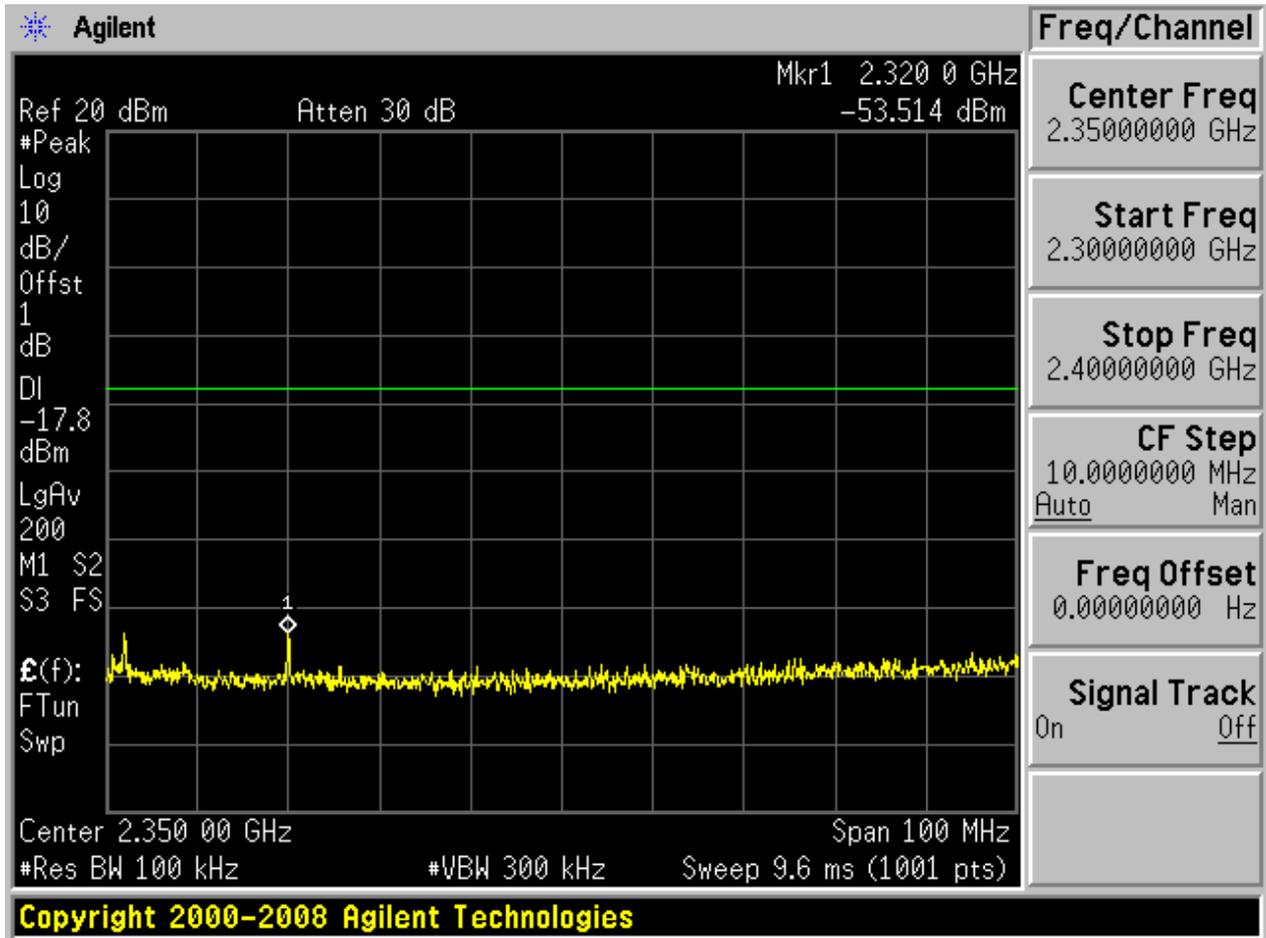




2.4835G - 2.5G

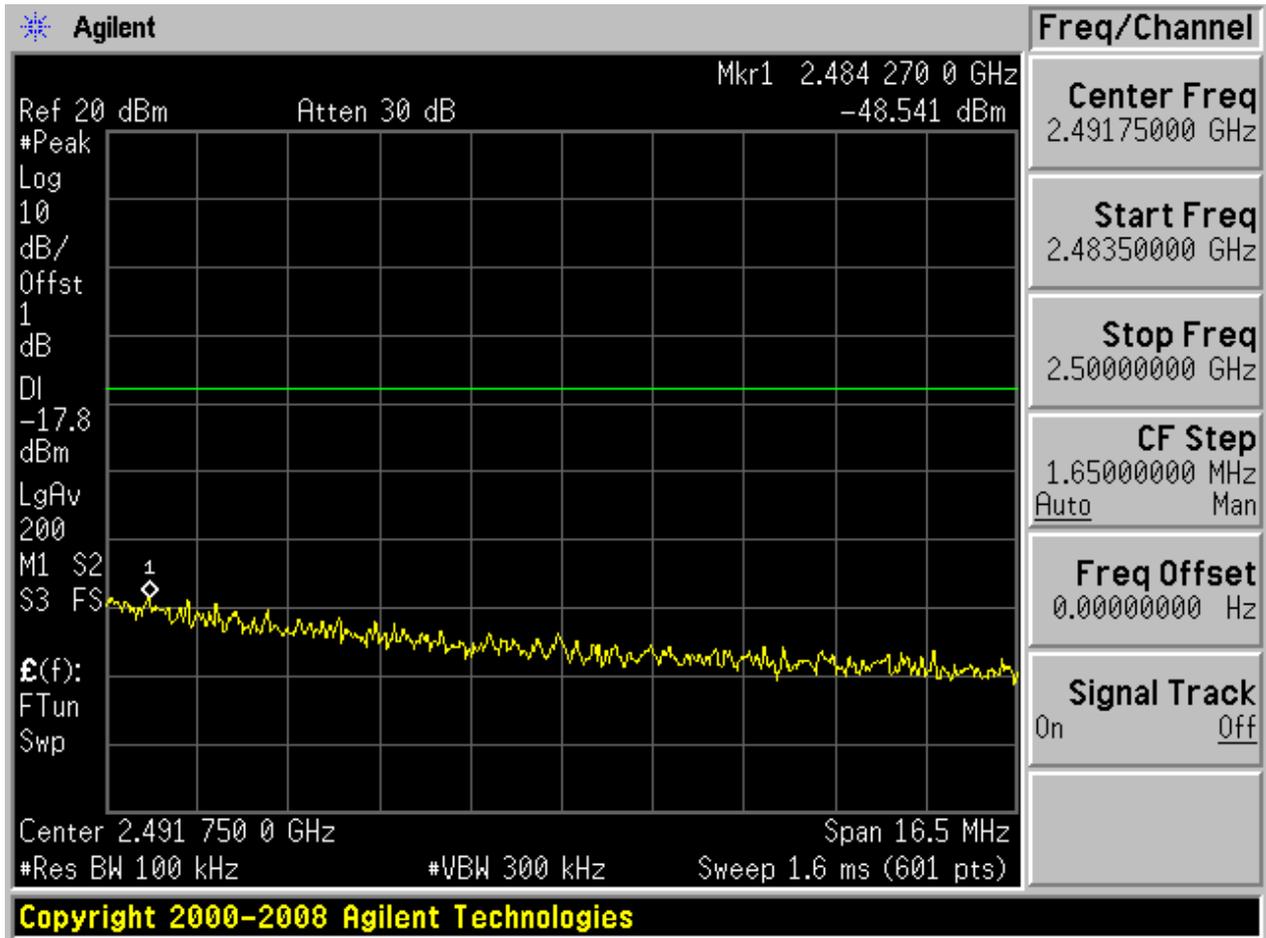




2.5G - 26.5G

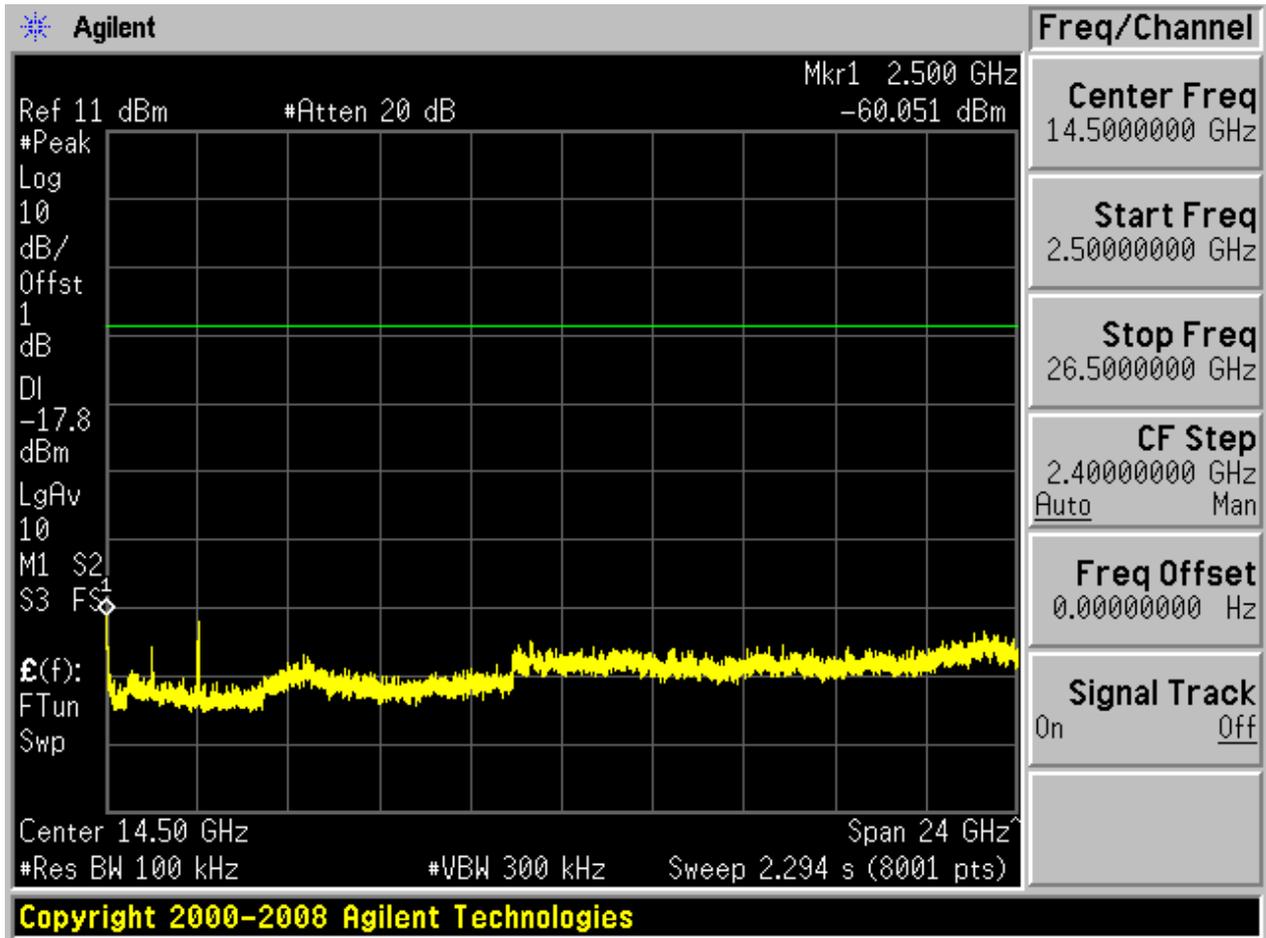

2.7 11N20_B


2.7.1 Pref:

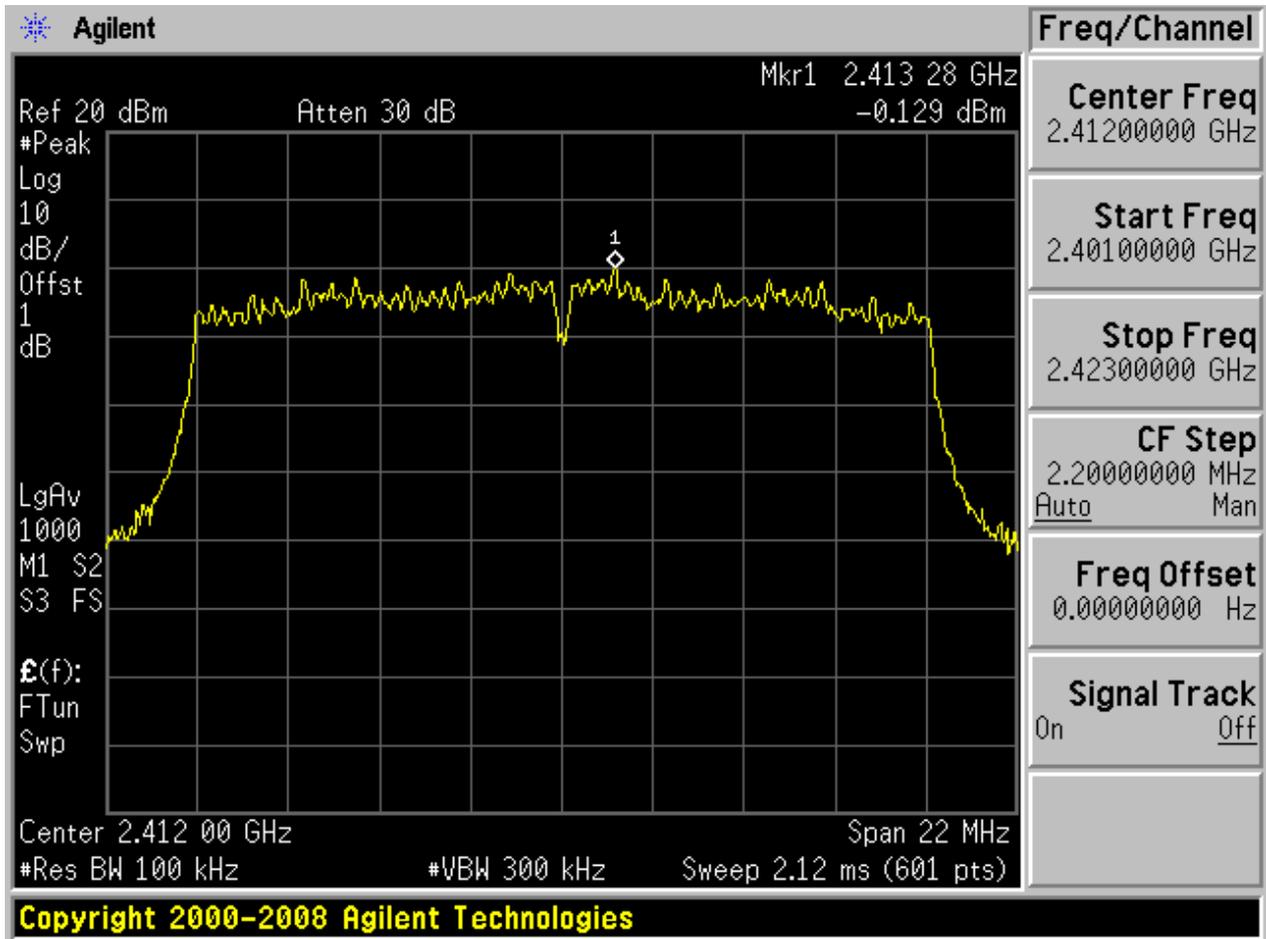




2.7.2 Puw:

9k - 150k

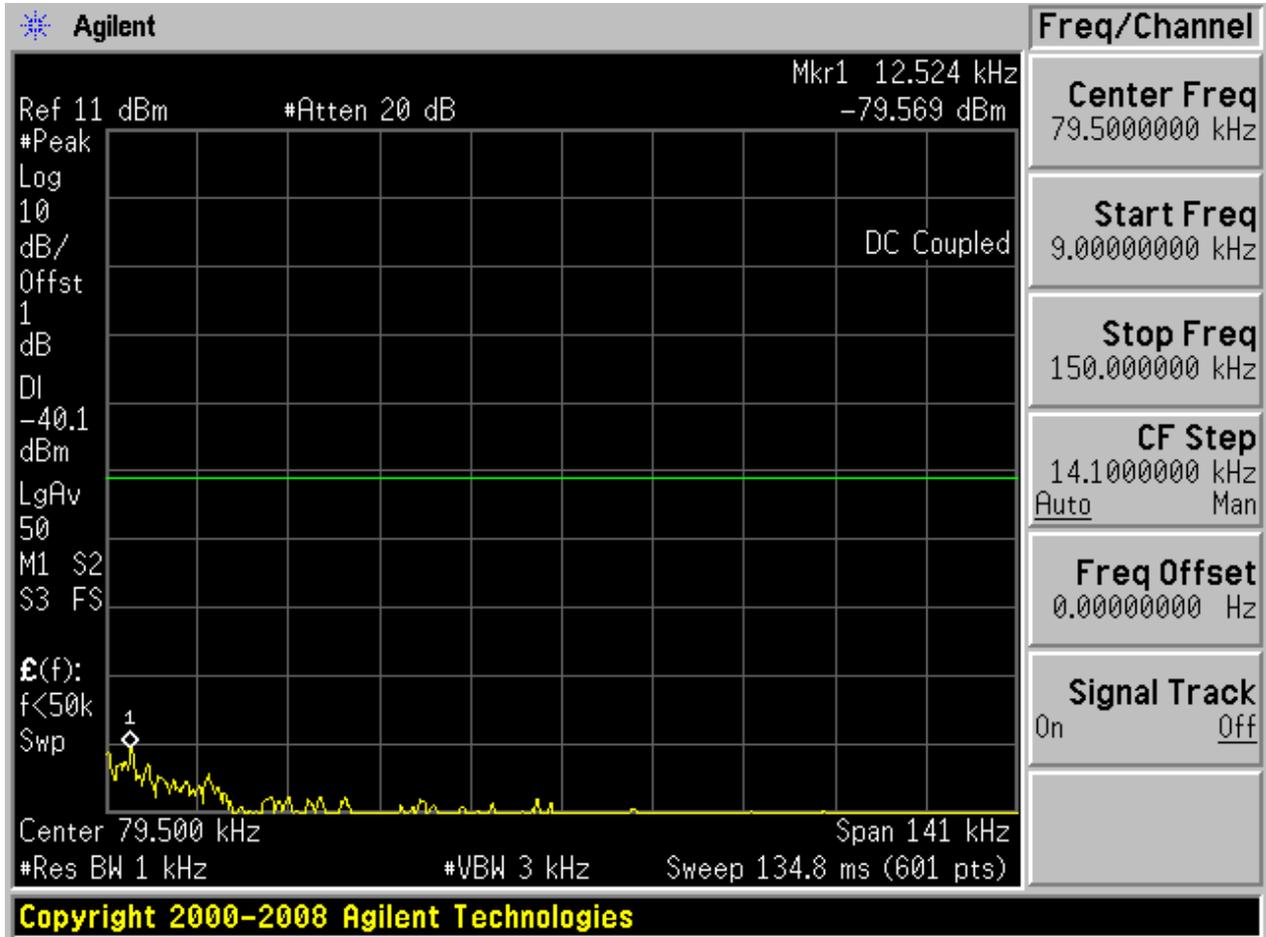




30M - 2.3G

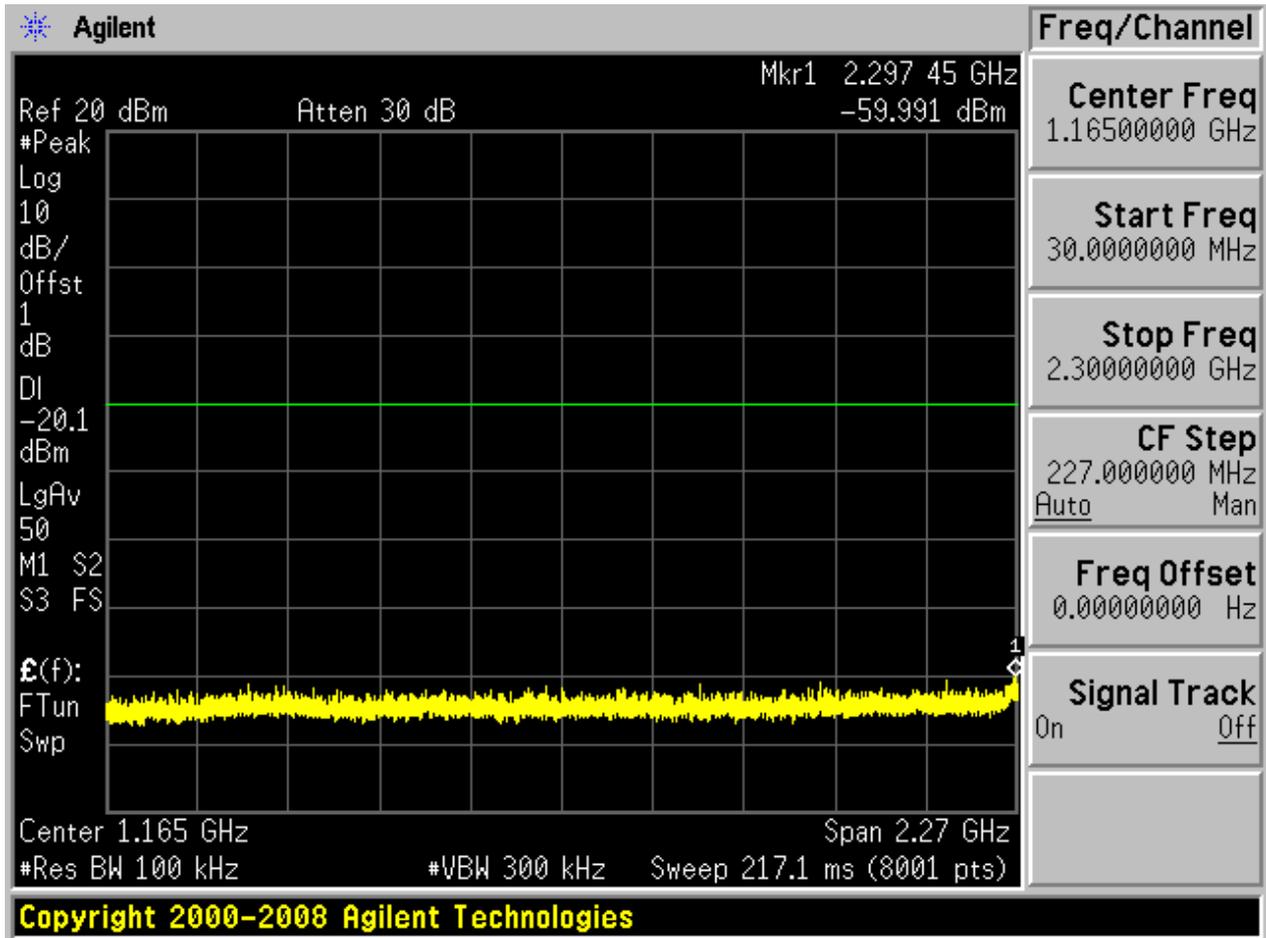




2.3G - 2.4G

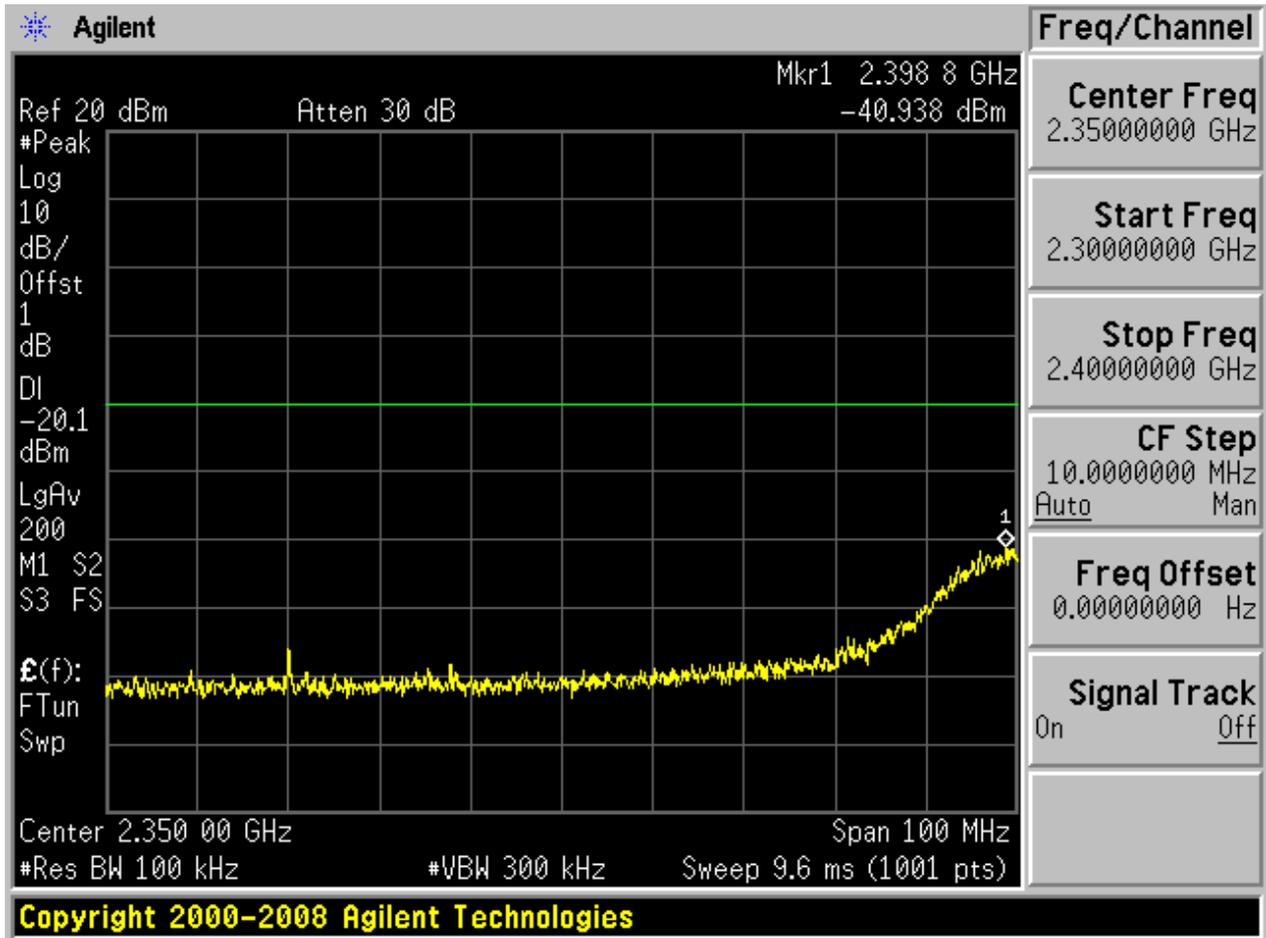




2.4835G - 2.5G

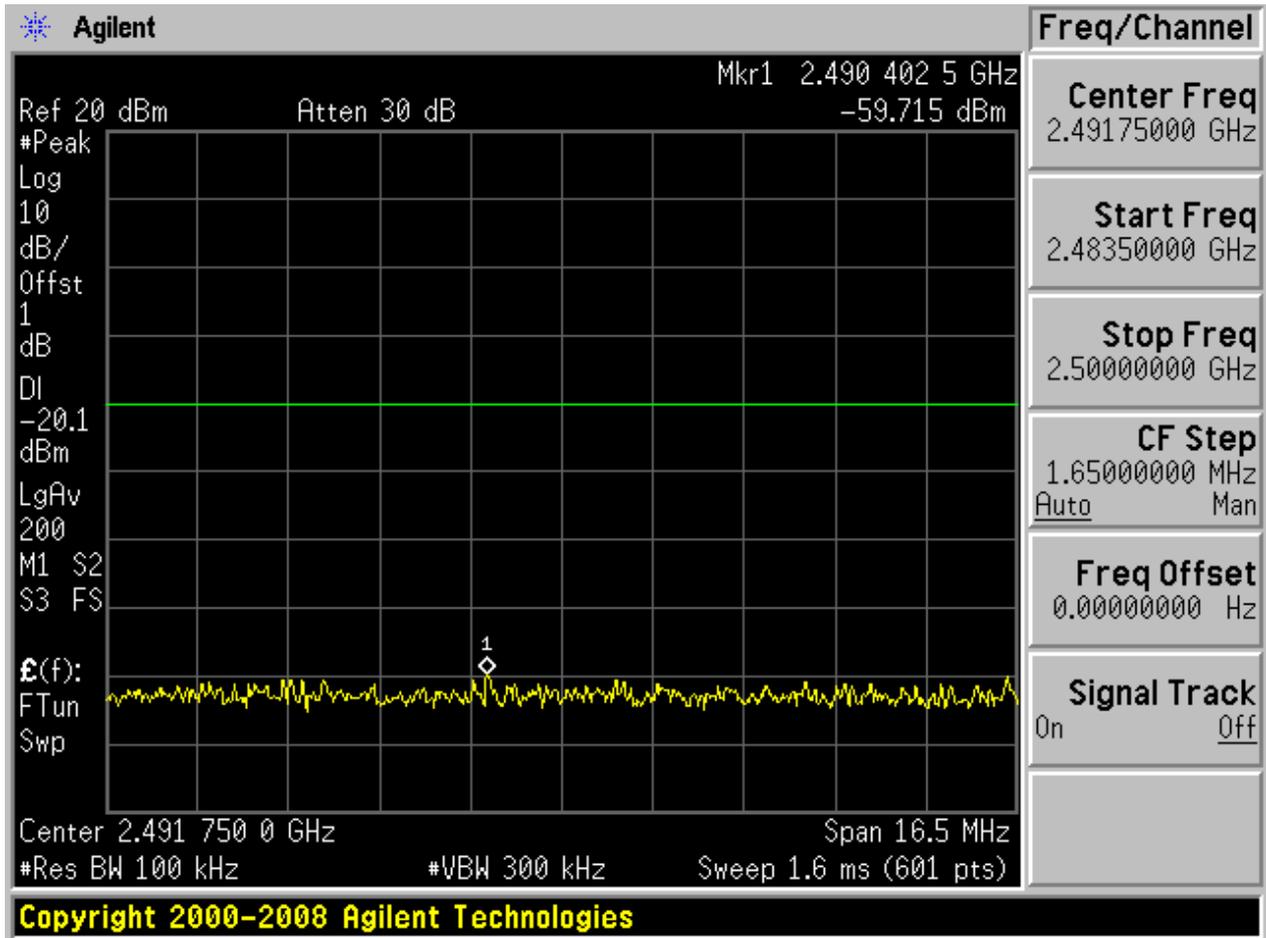




2.5G - 26.5G

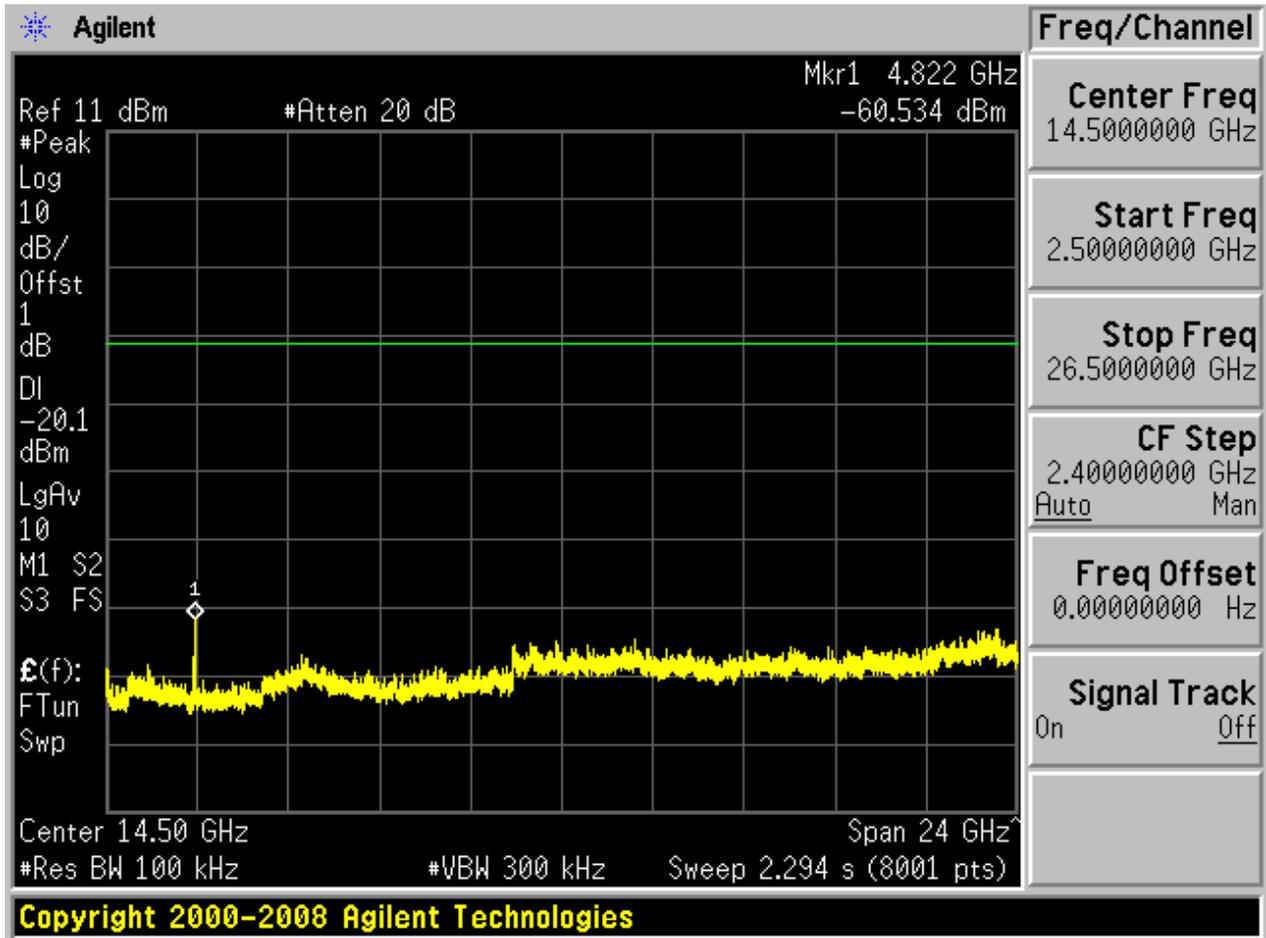



2.8 11N20_M


2.8.1 Pref:

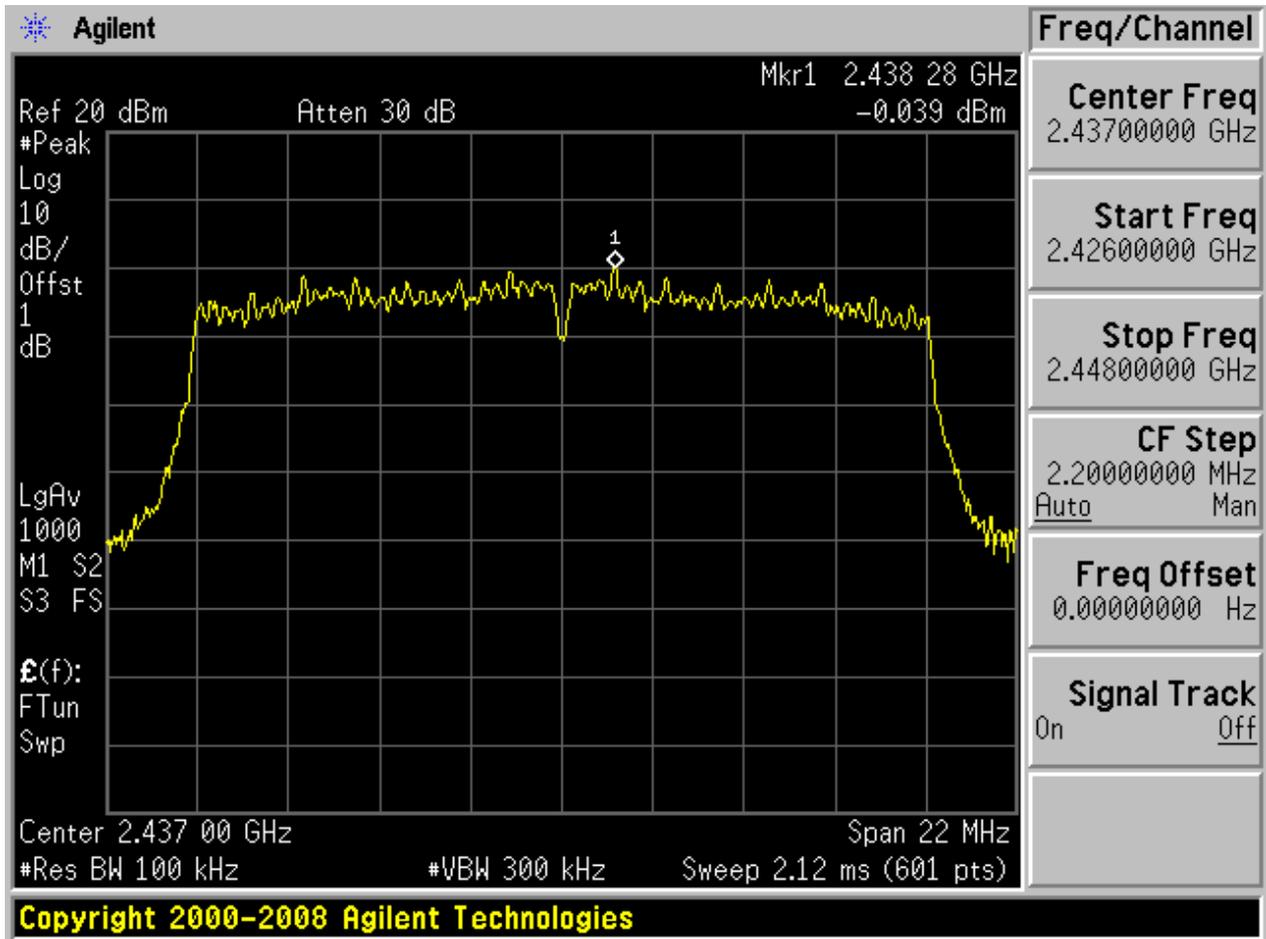




2.8.2 Puw:

9k - 150k

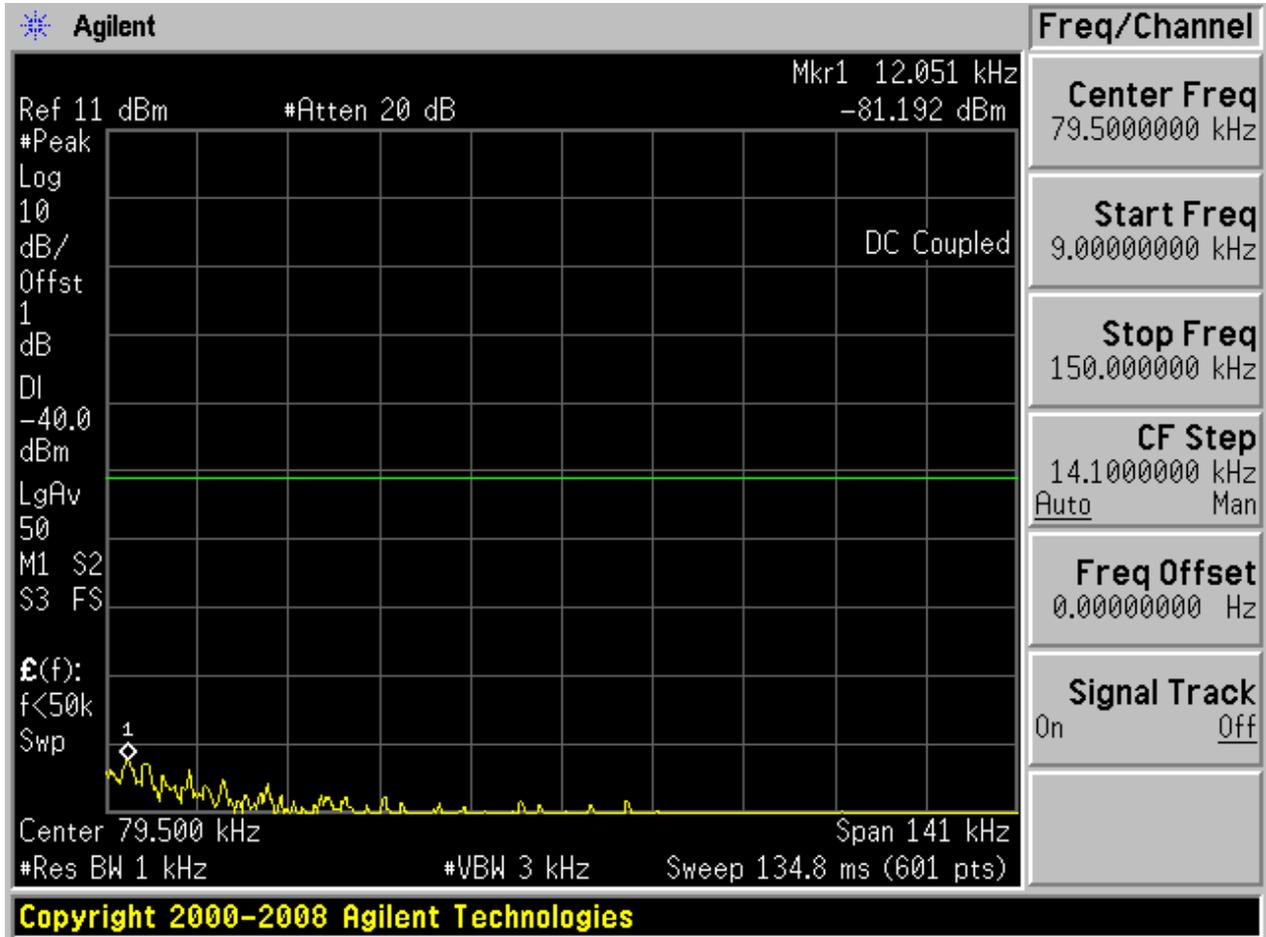




30M - 2.3G

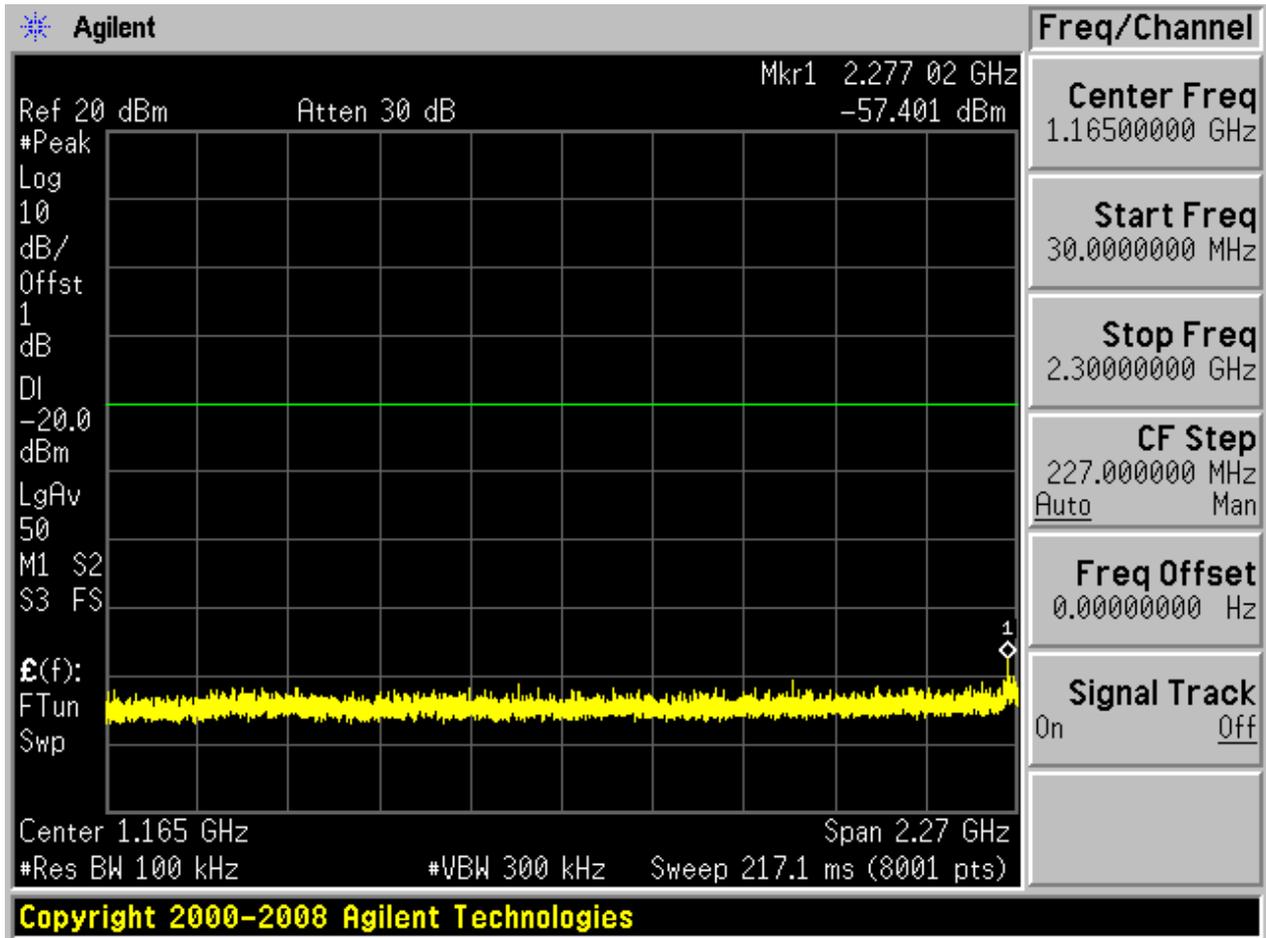




2.3G - 2.4G

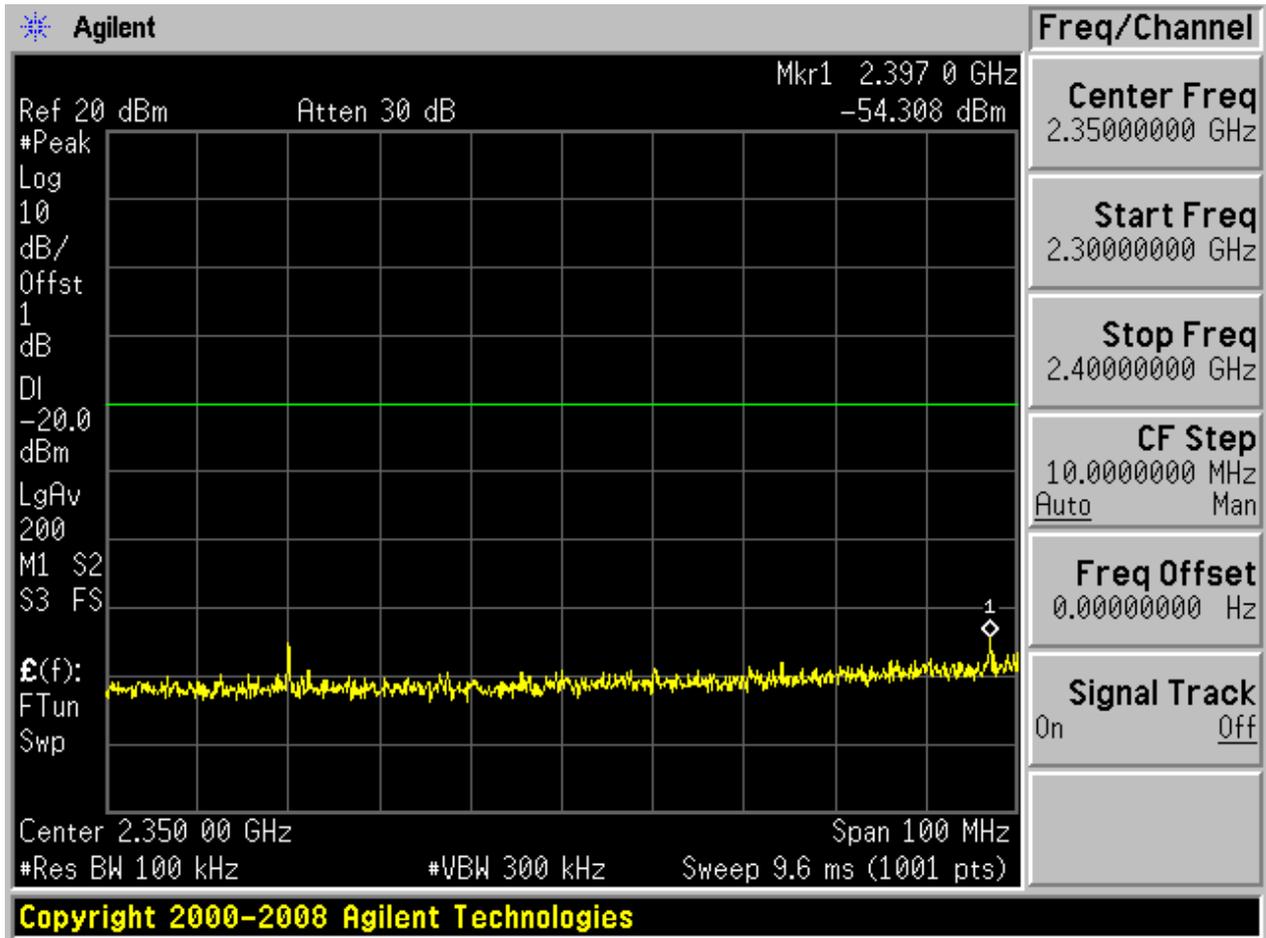




2.4835G - 2.5G

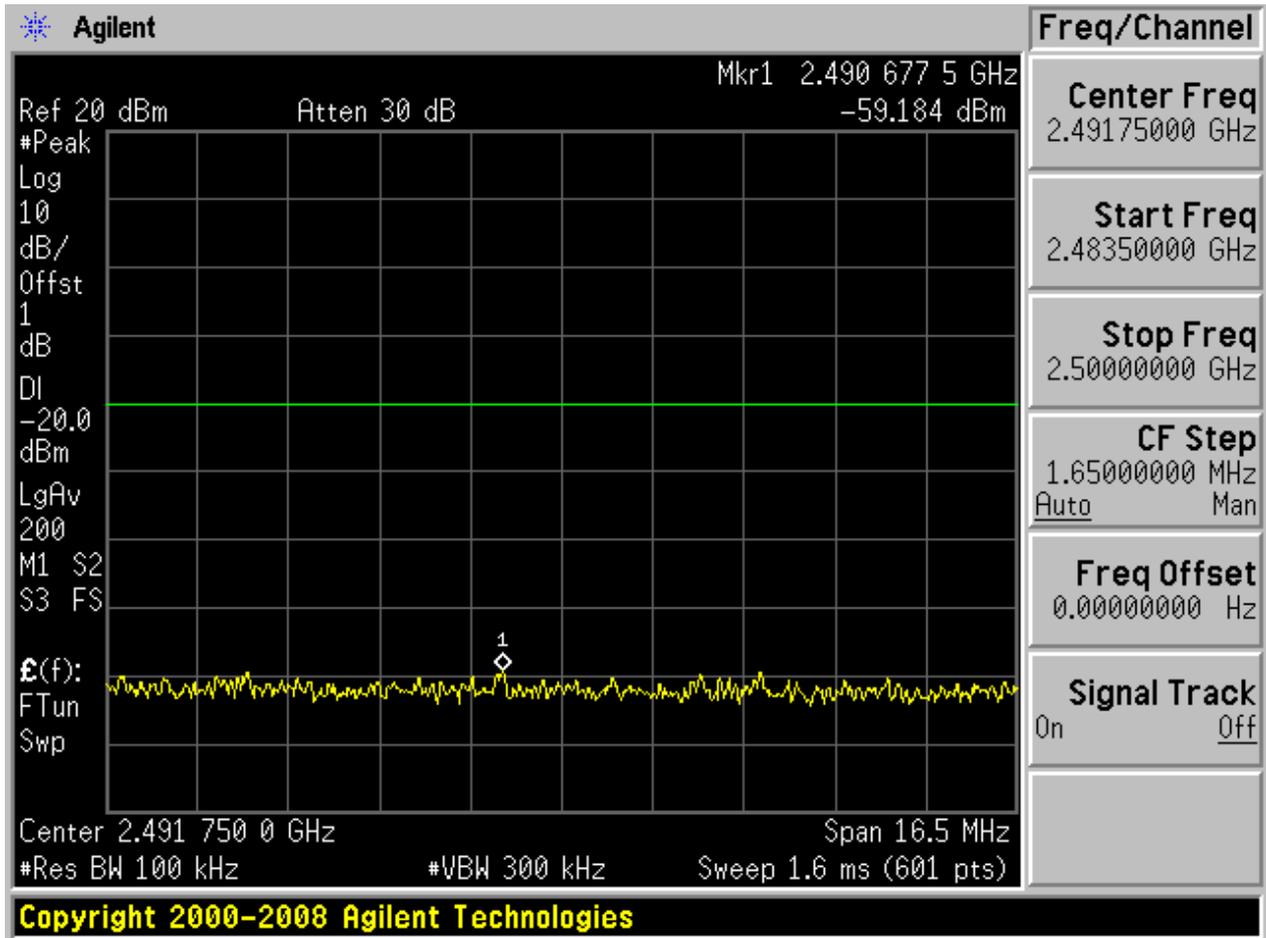




2.5G-26.5G

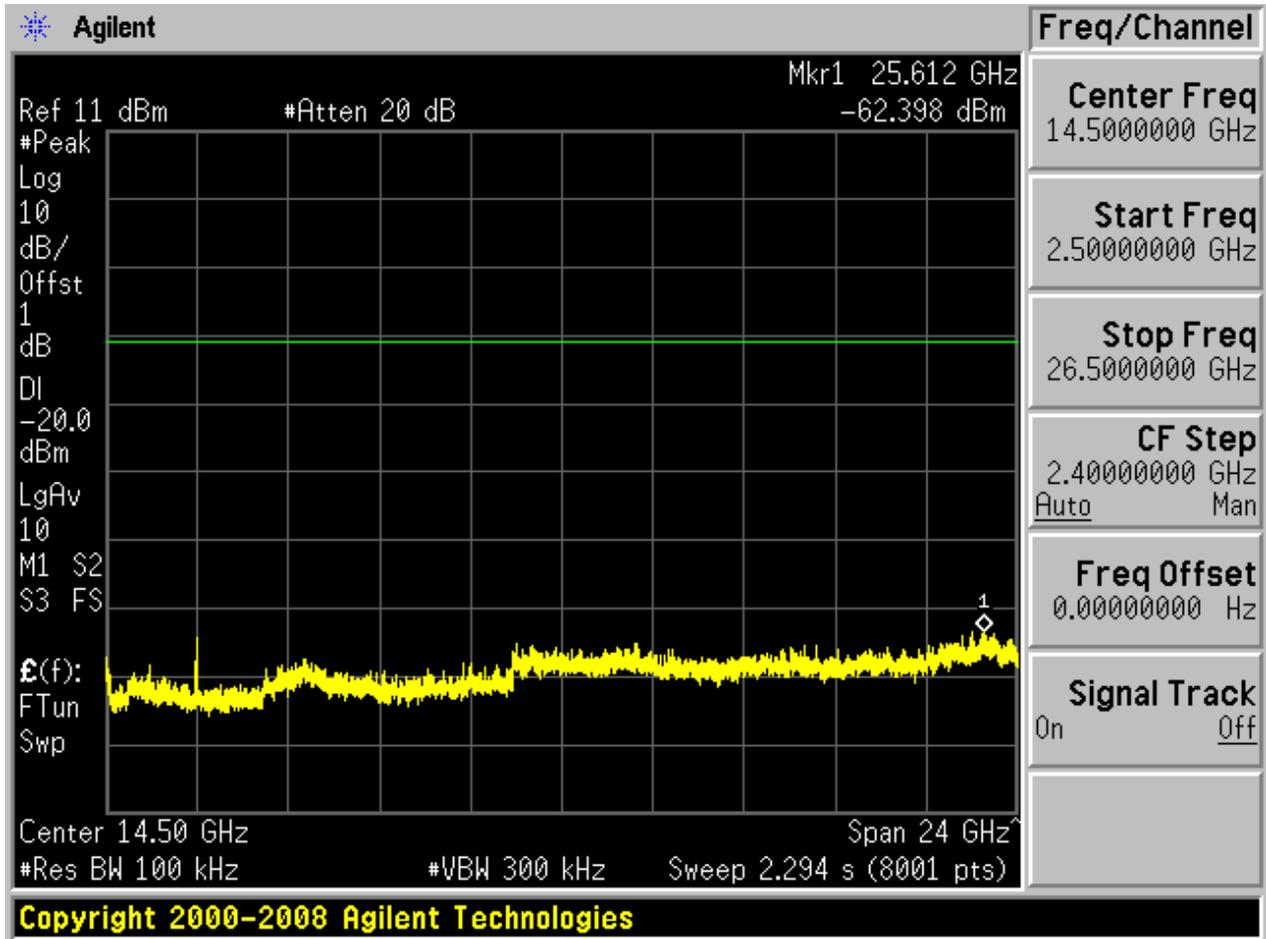



2.9 11N20_T


2.9.1 Pref:

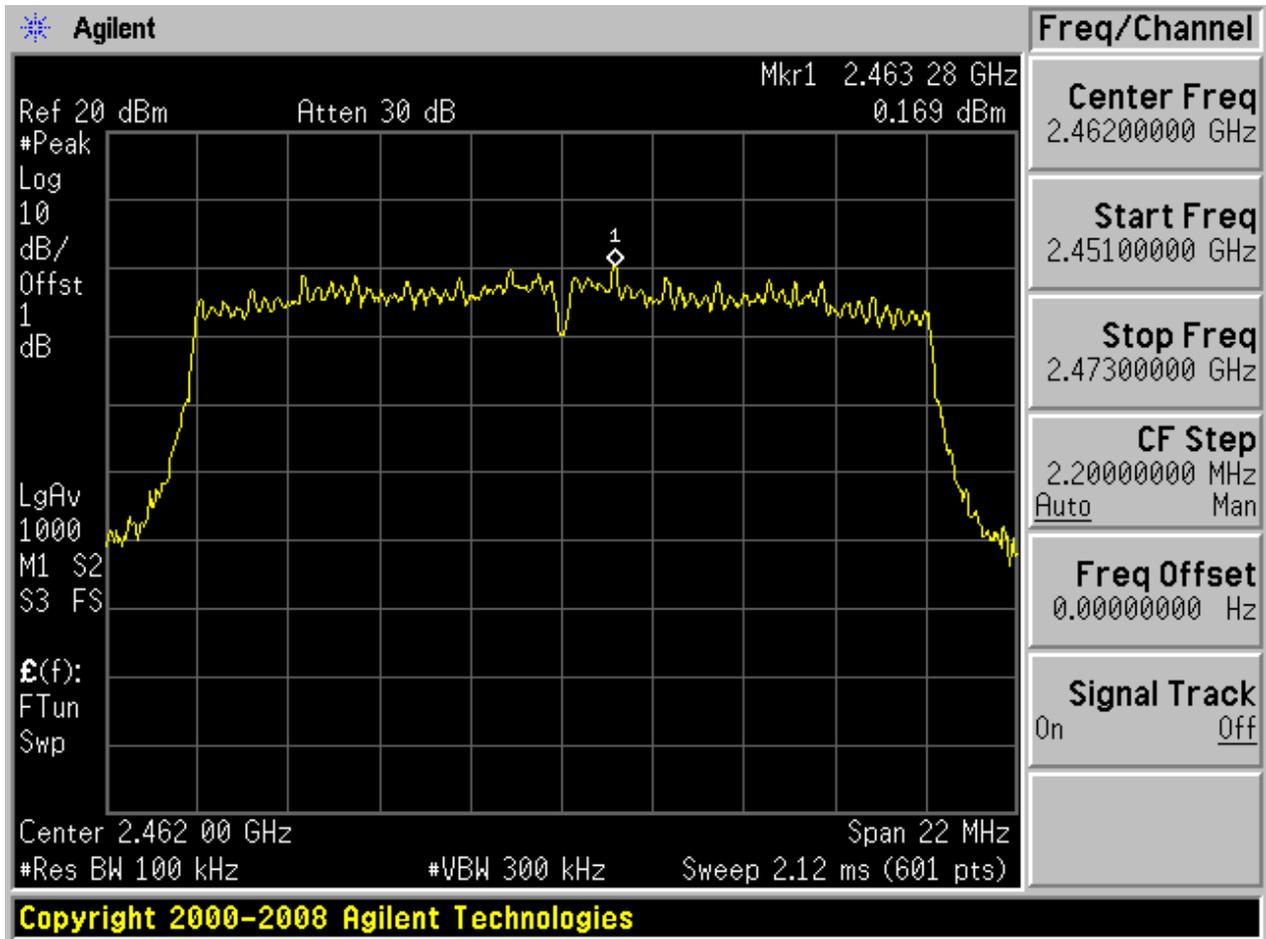




2.9.2 Puw:

9k - 150k

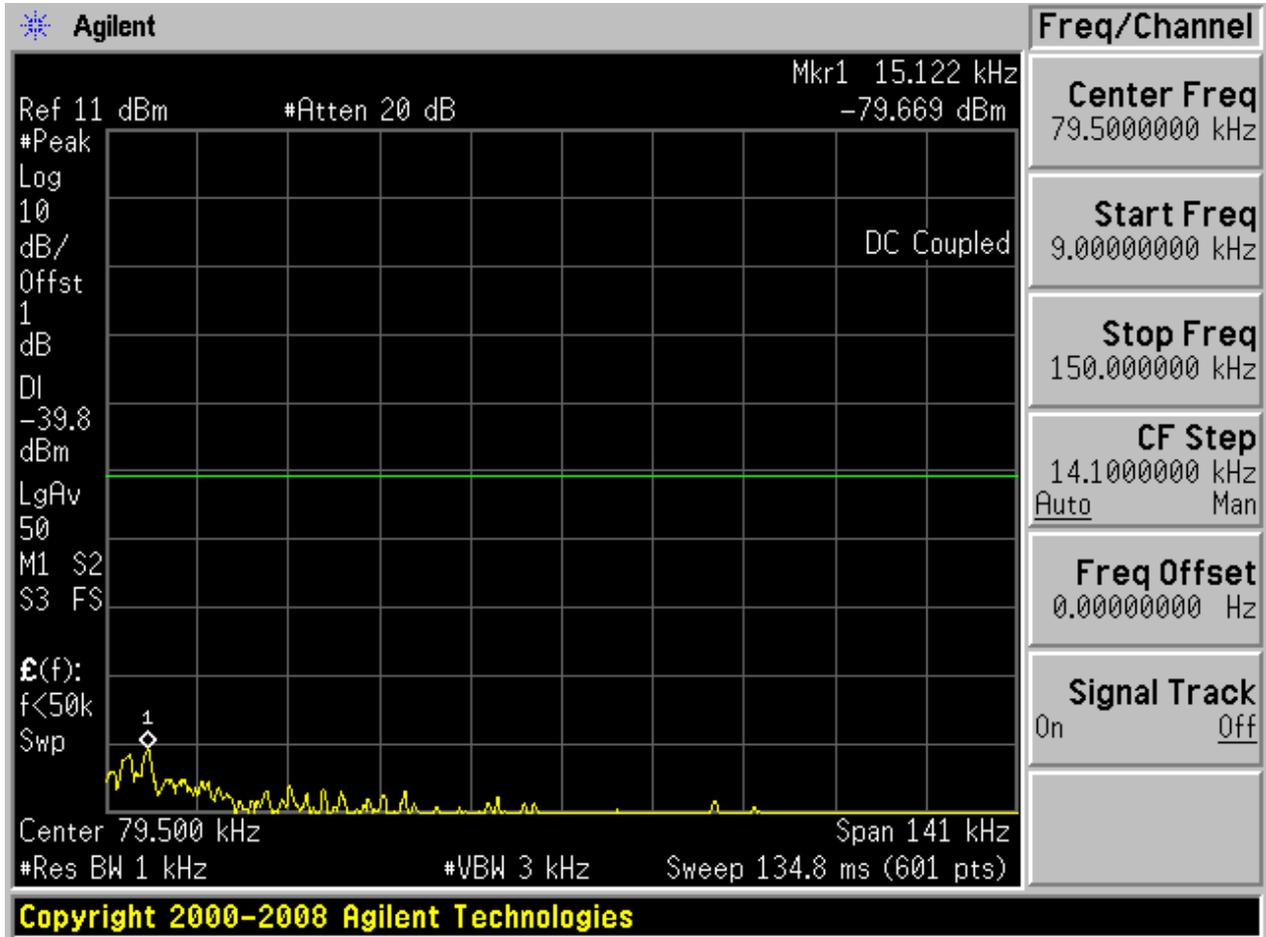




30M - 2.3G

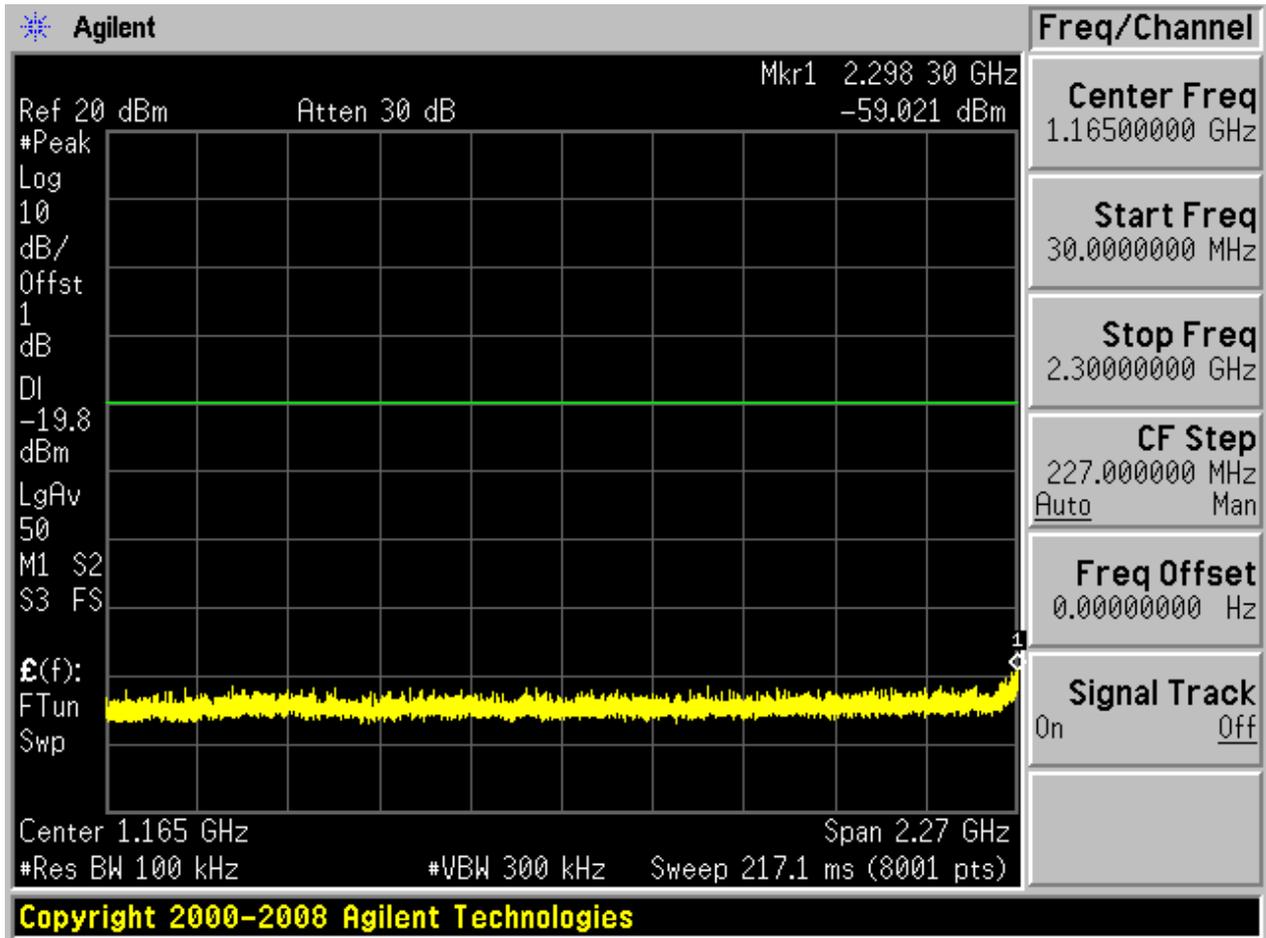




2.3G - 2.4G

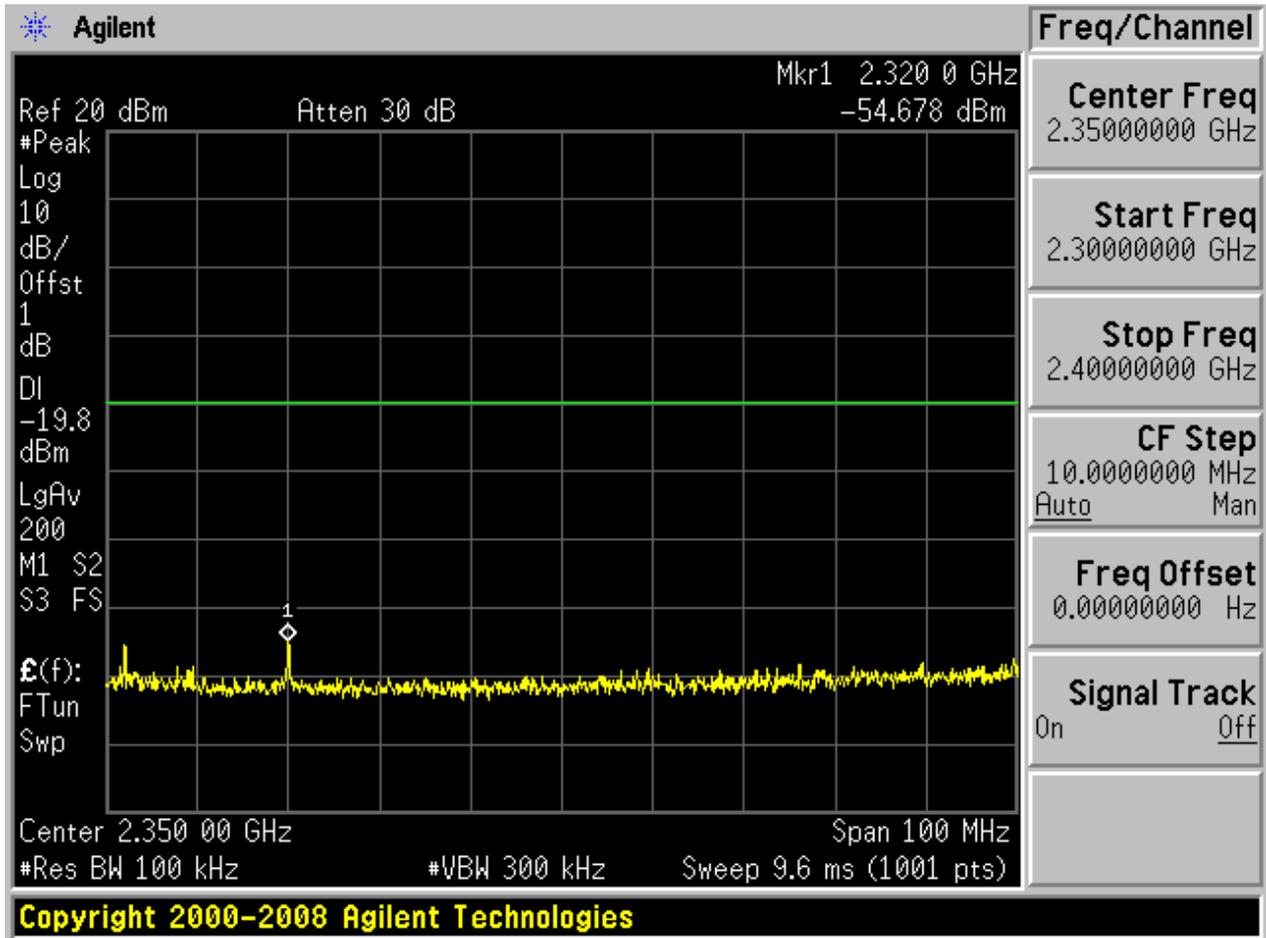




2.4835G - 2.5G

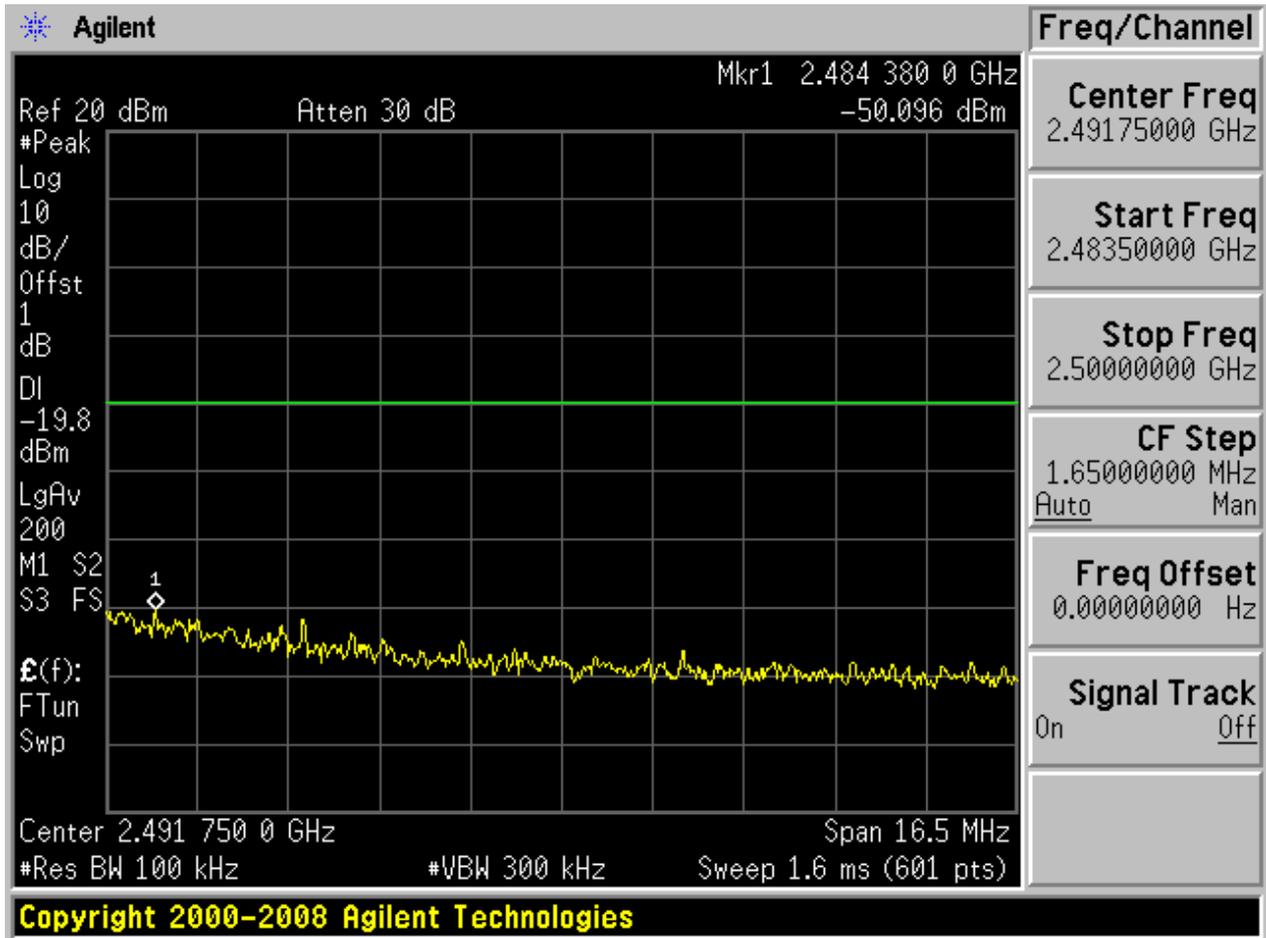



2.5G - 26.5G

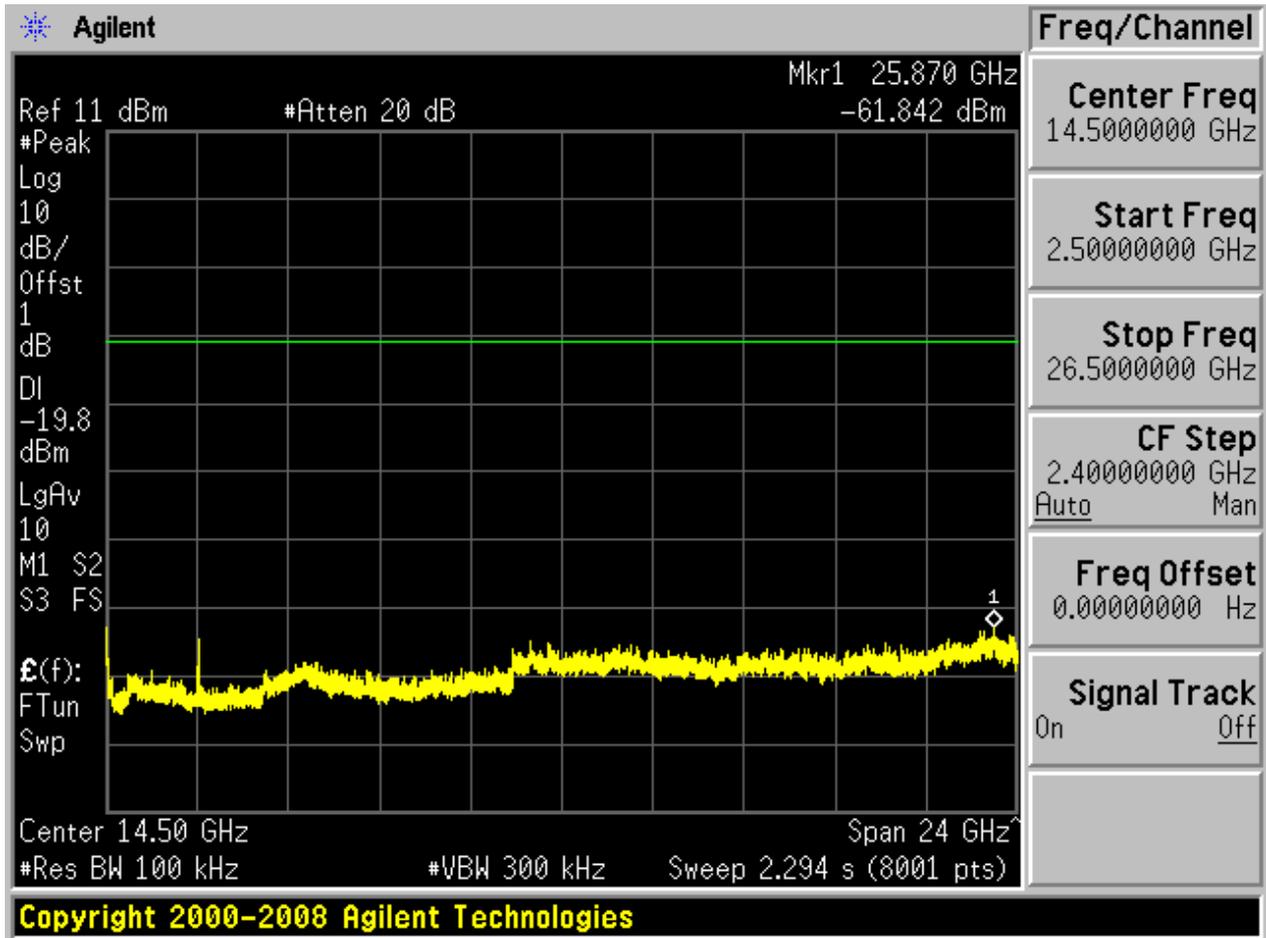




Appendix E: Radiated Spurious Emission & Spurious in Restricted Band

Part 1: Testing Range of “30 MHz to 1 GHz”

Note 1: The test results and plot for testing range of “30 MHz to 1 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.


Note 2: **The emissions in this range are mainly from the Platform Device (Notepad PC and its ancillary components).**

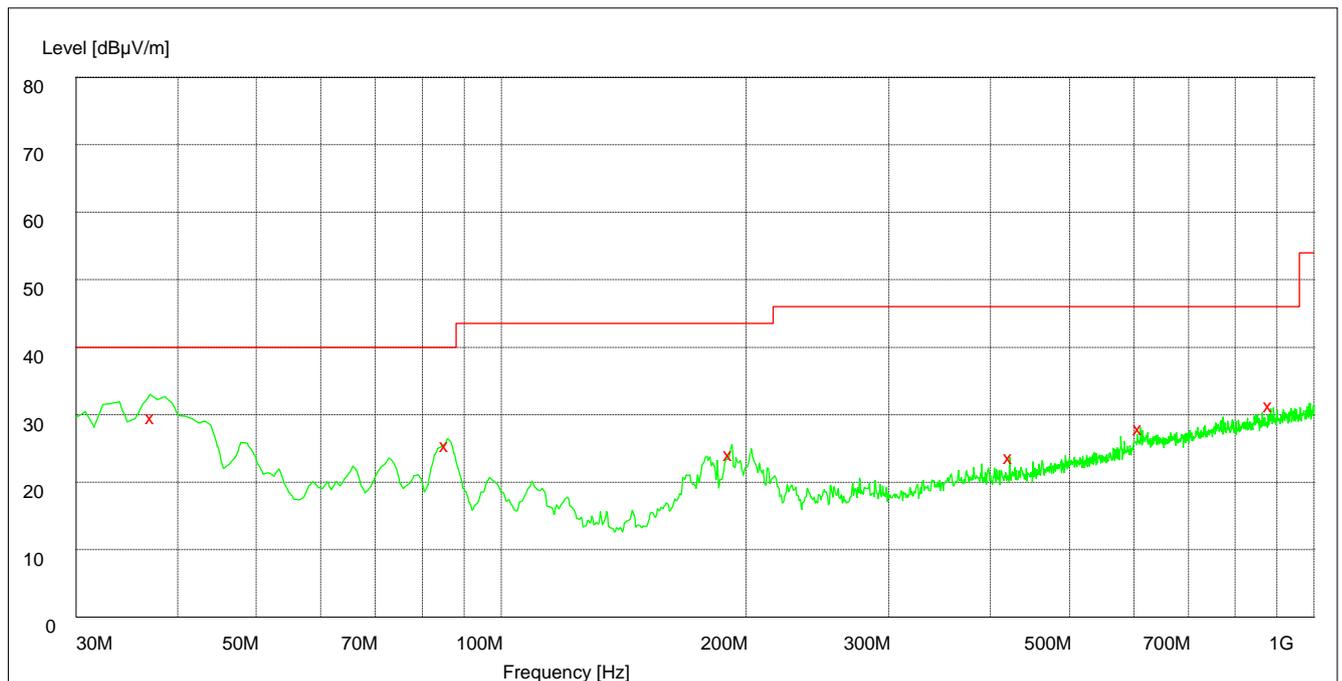

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
37.320000	30.90	15.2	40.0	9.1	100.0	360.00	VERTICAL
85.980000	26.80	11.2	40.0	13.2	114.0	198.00	VERTICAL
192.000000	25.50	12.1	43.5	18.0	100.0	352.00	VERTICAL
423.540000	25.10	18.0	46.0	20.9	100.0	236.00	VERTICAL
611.640000	29.40	21.5	46.0	16.6	121.0	142.00	VERTICAL
884.940000	32.70	24.8	46.0	13.3	125.0	219.00	VERTICAL

Part 2: Testing Range of “18 GHz to 26.5 GHz”

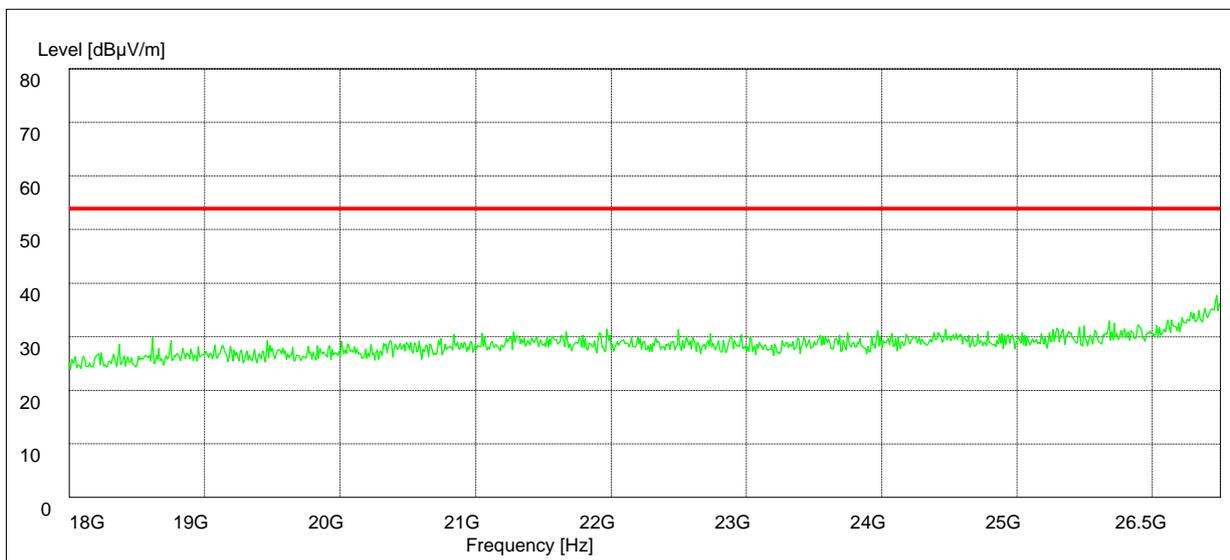

Note: No peak found in pre- test.

Part 3: Testing Range of “1GHz to 3GHz”


Note 1: The testing range of “2.3 GHz to 2.5 GHz” is for checking radiated emissions located in restricted bands near the EUT operating bands.

Note 2: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

Note 3: The peak spike exceeds the limit line is EUT’s operating frequency.

Test Mode: 11b

Channel 01

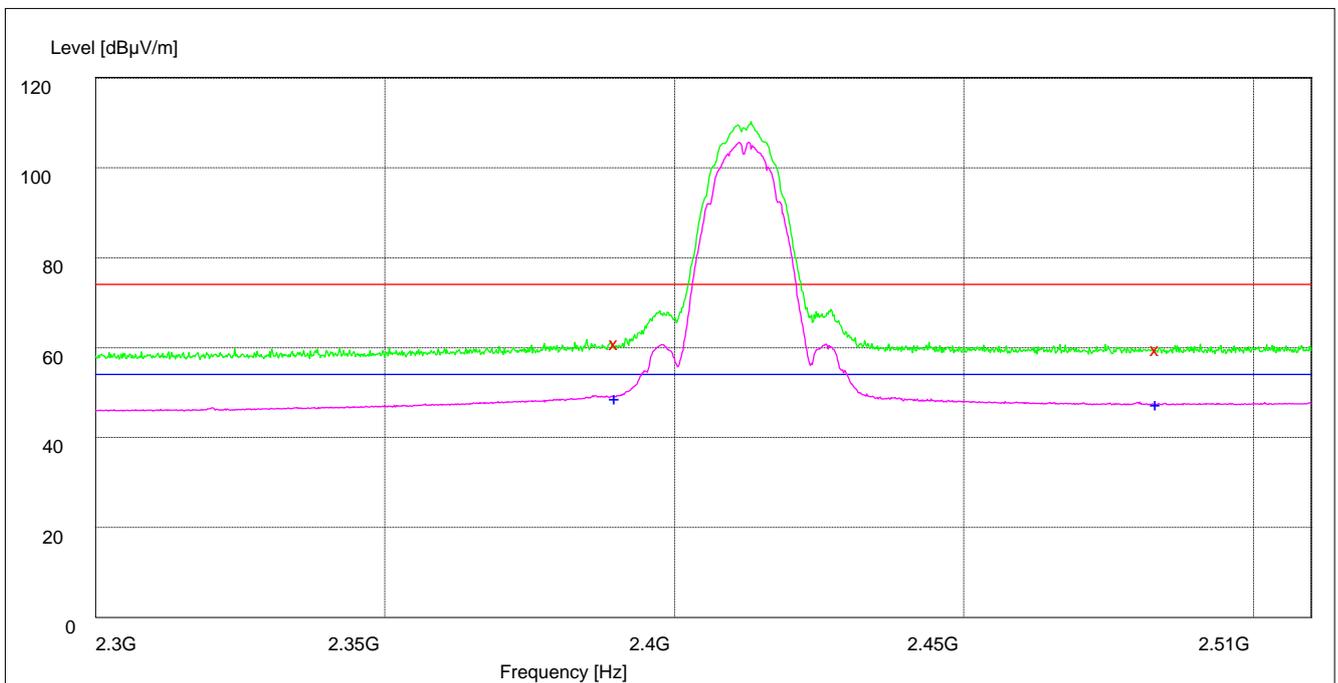

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.20	34.8	74.0	13.8	100.0	224.00	HORIZONTAL
2483.500000	60.50	35.1	74.0	13.5	147.0	91.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.20	34.8	54.0	5.8	100.0	224.00	HORIZONTAL
2483.500000	48.20	35.1	54.0	5.8	100.0	222.00	HORIZONTAL

Channel 11

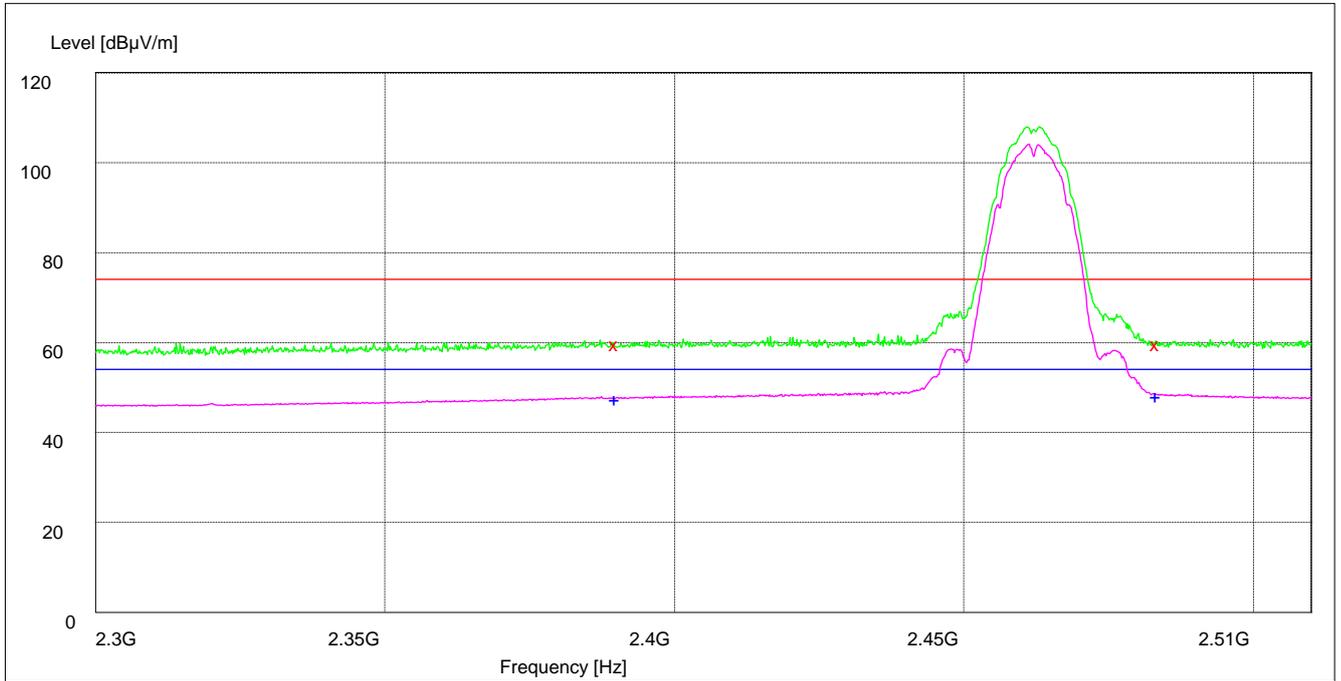

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.10	34.8	74.0	13.8	133.0	100.00	VERTICAL
2483.500000	60.50	35.1	74.0	13.5	100.0	259.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.20	34.8	54.0	5.8	100.0	264.00	HORIZONTAL
2483.500000	48.50	35.1	54.0	5.5	100.0	219.00	HORIZONTAL

Test Mode: 11g

Channel 01

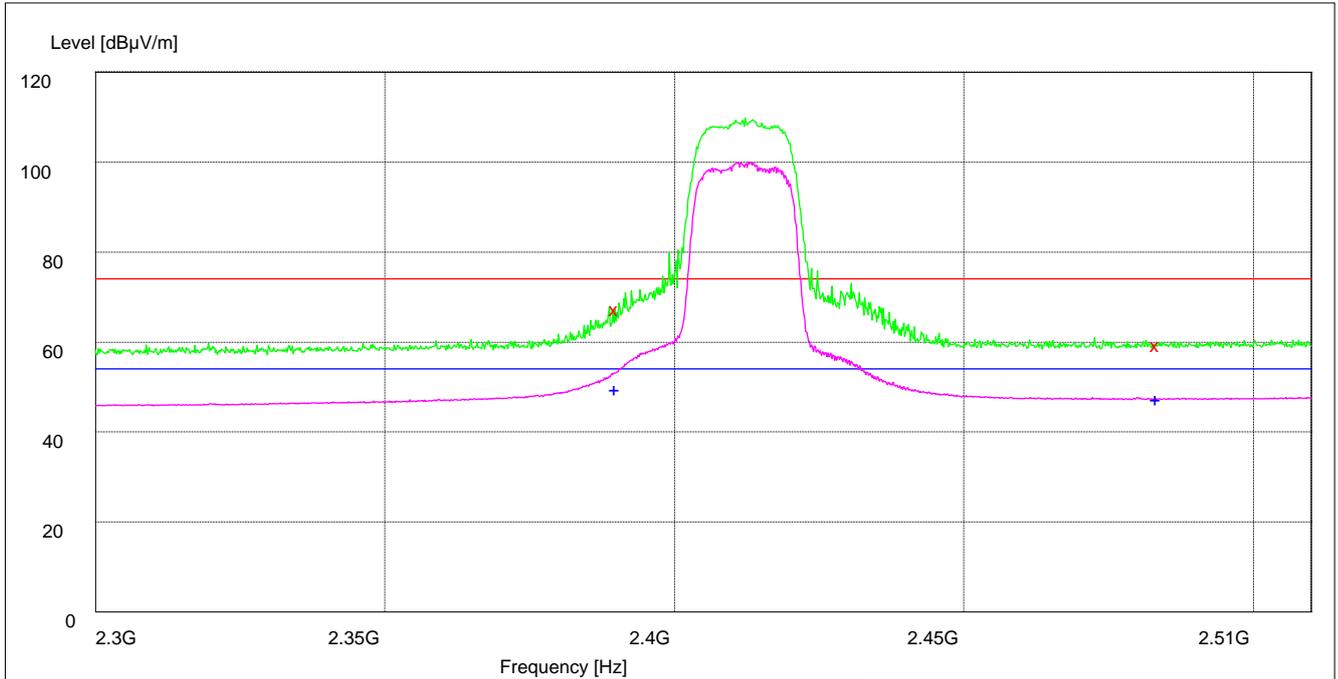

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	69.30	34.8	74.0	4.7	100.0	235.00	HORIZONTAL
2483.500000	59.70	35.1	74.0	14.3	100.0	359.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	50.00	34.8	54.0	4.0	100.0	270.00	HORIZONTAL
2483.500000	48.20	35.1	54.0	5.8	100.0	0.00	VERTICAL

Channel 11

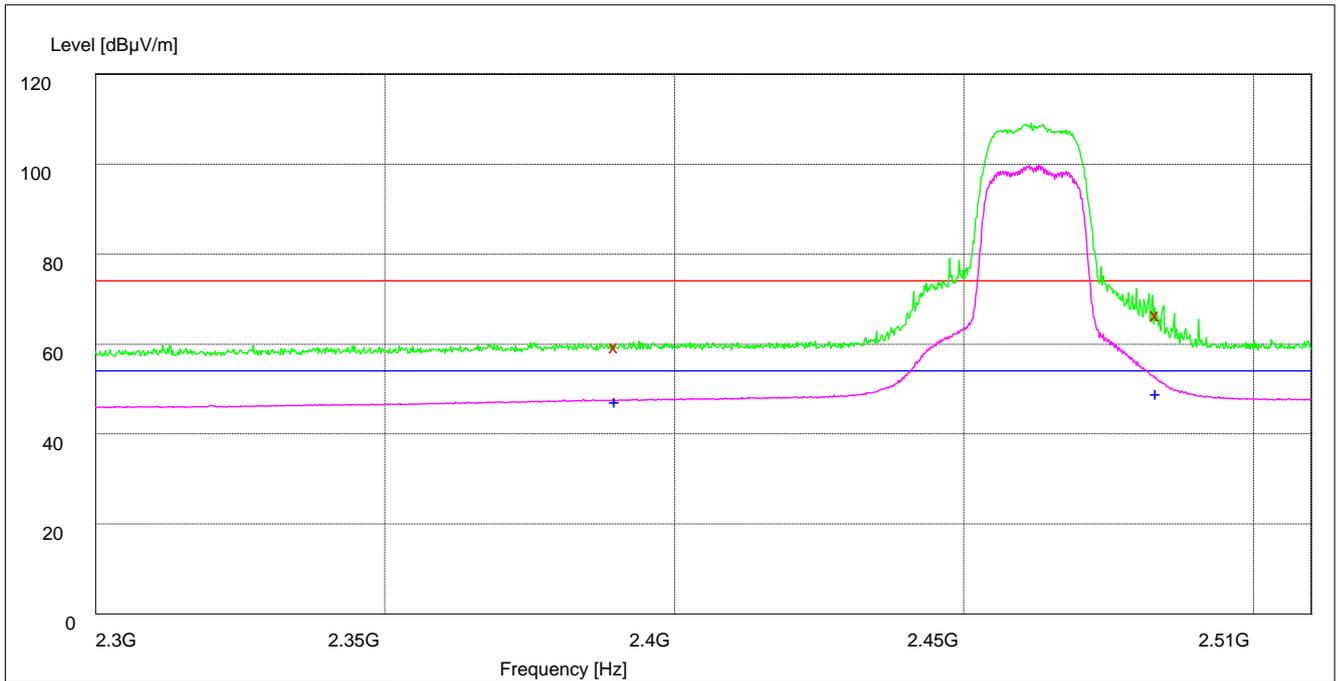

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.00	34.8	74.0	14.0	139.0	43.00	VERTICAL
2483.500000	68.50	35.1	74.0	5.5	100.0	198.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.40	34.8	54.0	5.6	100.0	216.00	HORIZONTAL
2483.500000	49.30	35.1	54.0	4.7	100.0	219.00	HORIZONTAL

Test Mode: 11n

Channel 01

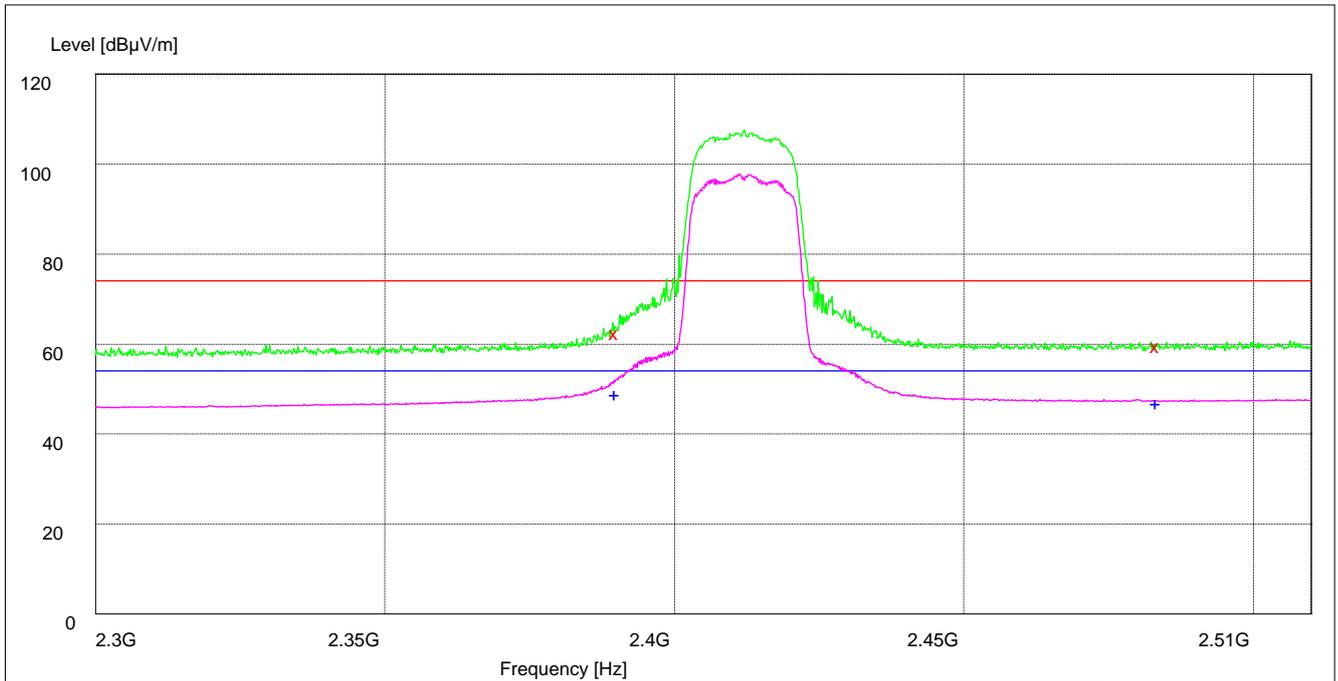

Note: The peak exceeds the limit line is carrier frequency.


MEASUREMENT RESULT: PK Detector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	63.60	34.8	74.0	10.4	100.0	267.00	HORIZONTAL
2483.500000	60.30	35.1	74.0	13.7	146.0	360.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	49.30	34.8	54.0	4.7	102.0	268.00	HORIZONTAL
2483.500000	48.00	35.1	54.0	6.0	123.0	267.00	HORIZONTAL

Channel 11

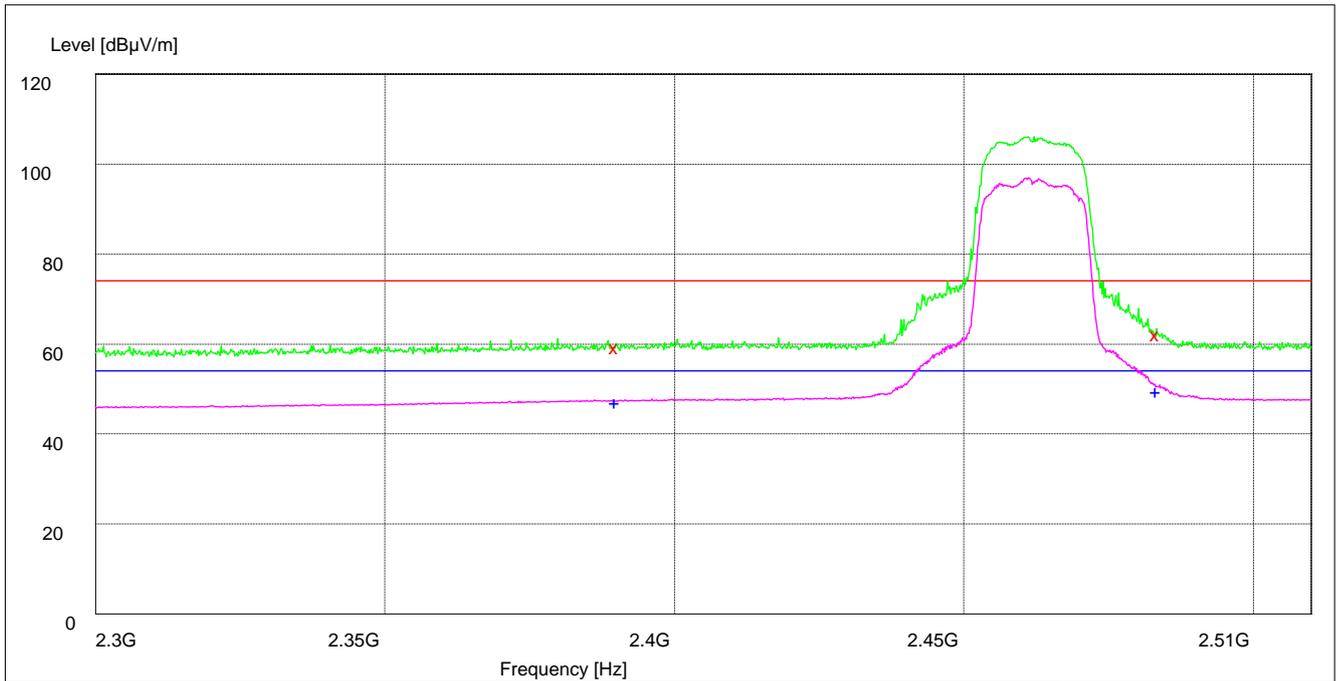

Note: The peak exceeds the limit line is carrier frequency.

MEASUREMENT RESULT: PK Detector


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	60.10	34.8	74.0	13.9	142.0	192.00	VERTICAL
2483.500000	63.00	35.1	74.0	11.0	150.0	170.00	HORIZONTAL

MEASUREMENT RESULT: AVDetector

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarization
2390.000000	48.20	34.8	54.0	5.8	105.0	212.00	HORIZONTAL
2483.500000	49.00	35.1	54.0	5.0	101.0	221.00	HORIZONTAL

Part 4: Testing Range of “1 GHz to 18 GHz”


- Note 1: The test results and plot for testing range of “1 GHz to 18 GHz” showed as below is **the WORST case for all Test Modes and Channels**. This range will not be presented for each Test Mode and each Channel.
- Note 2: The testing range of “1 GHz to 18 GHz” is for checking radiated emissions located in restricted bands faraway from the EUT operating bands.
- Note 3: Two limits are required in the testing range above 1 GHz, that is Peak limit (74 dB μ V/m) and Average Limit (54 dB μ V/m).

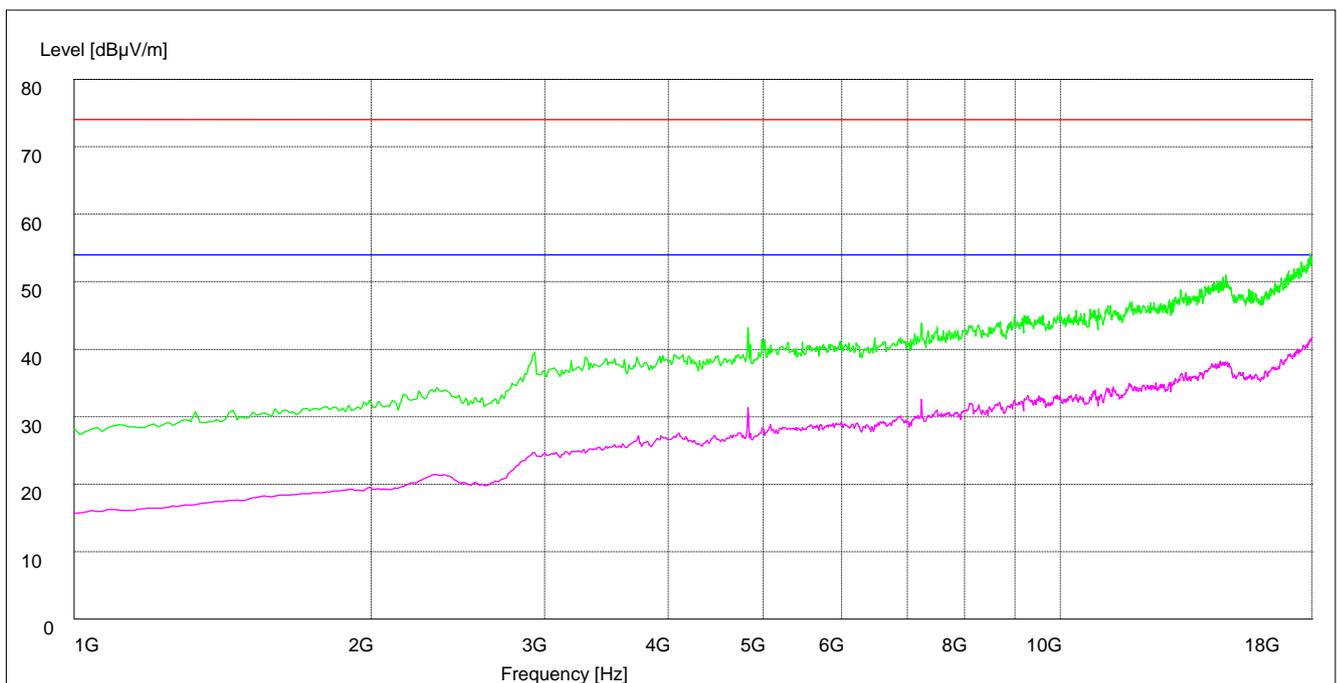



Appendix H: AC Power Line Conducted Emissions

Channel 6

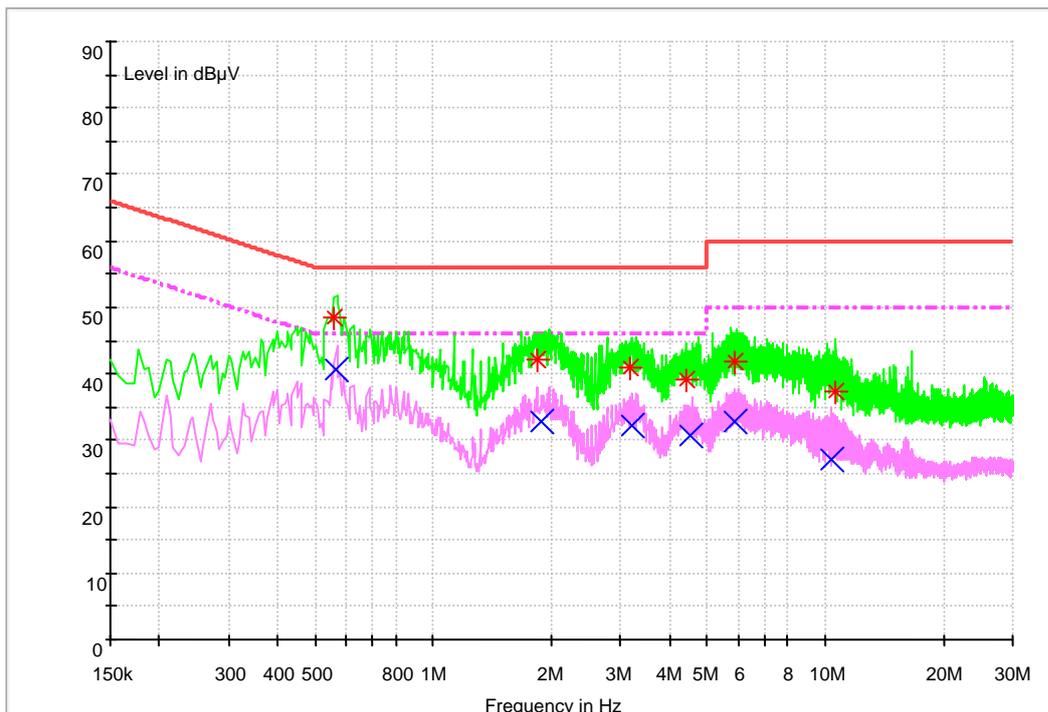

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.556470	48.5	9.7	56.0	7.5	N	FLO
1.845158	42.1	9.7	56.0	13.9	N	FLO
3.162818	40.9	9.7	56.0	15.1	N	FLO
4.393934	39.2	9.8	56.0	16.8	N	FLO
5.832135	41.7	9.8	60.0	18.3	N	FLO
10.542806	37.2	9.9	60.0	22.8	N	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.566752	40.6	9.7	46.0	5.4	N	FLO
1.885556	32.8	9.7	46.0	13.2	N	FLO
3.221674	32.2	9.7	46.0	13.8	N	FLO
4.523434	30.8	9.8	46.0	15.2	N	FLO
5.875395	32.8	9.8	50.0	17.2	N	FLO
10.359285	27.1	9.9	50.0	22.9	N	FLO

END