



FCC Radio Test Report

FCC ID: QISE5730S-6

This report concerns (check one): Original Grant Class II Change

Project No. : 1405C290
Equipment : Mobile WiFi
Model Name : E5730s-6
Applicant : Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of
Huawei Technologies Co., Ltd., Bantian,
Longgang District, Shenzhen

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: May 27, 2014

Date of Test: May 27, 2014 ~ Jun. 04, 2014

Issued Date: Jun .05, 2014

Testing Engineer : David Mao
(David Mao)

Technical Manager : Leo Hung
(Leo Hung)

Authorized Signatory : Steven Lu
(Steven Lu)

Neutron Engineering Inc.

No.3,Jinshagang 1st Road, ShiXia,
Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . TEST RESULT	13
4.1 RADIATED RF OUTPUT POWER MEASUREMENT	13
4.1.1 LIMIT	13
4.1.2 MEASURING INSTRUMENTS AND SETTING	13
4.1.3 TEST PROCEDURE	13
4.1.4 TEST SETUP LAYOUT	14
4.1.5 TEST DEVIATION	14
4.1.6 EUT OPERATION DURING TEST	14
4.1.7 EUT TEST CONDITIONS	14
4.1.8 TEST RESULTS	14
4.2 99% OCCUPIED BANDWIDTH MEASUREMENT	15
4.2.1 LIMIT	15
4.2.2 MEASURING INSTRUMENTS AND SETTING	15
4.2.3 TEST PROCEDURE	15
4.2.4 TEST SETUP LAYOUT	15
4.2.5 TEST DEVIATION	15
4.2.6 EUT OPERATION DURING TEST	15
4.2.7 EUT TEST CONDITIONS	15
4.2.8 TEST RESULTS	16
4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT	17
4.3.1 LIMIT	17
4.3.2 MEASURING INSTRUMENTS AND SETTING	17
4.3.3 TEST PROCEDURES	17
4.3.4 TEST SETUP LAYOUT	17
4.3.5 TEST DEVIATION	17
4.3.6 EUT OPERATION DURING TEST	17
4.3.7 EUT TEST CONDITIONS	18



Table of Contents	Page
4.3.8 TEST RESULTS	18
4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT	19
4.4.1 LIMIT	19
4.4.2 MEASURING INSTRUMENTS AND SETTING	19
4.4.3 TEST PROCEDURES	19
4.4.4 TEST SETUP LAYOUT	20
4.4.5 TEST DEVIATION	20
4.4.6 EUT OPERATION DURING TEST	20
4.4.7 EUT TEST CONDITIONS	20
4.4.8 TEST RESULTS	20
4.5 BAND EDGE MEASUREMENT	21
4.5.1 LIMIT	21
4.5.2 MEASURING INSTRUMENTS AND SETTING	21
4.5.3 TEST PROCEDURES	21
4.5.4 TEST SETUP LAYOUT	21
4.5.5 TEST DEVIATION	21
4.5.6 EUT OPERATION DURING TEST	21
4.5.7 EUT TEST CONDITIONS	21
4.5.8 TEST RESULTS	22
4.6 FREQUENCY STABILITY MEASUREMENT	23
4.6.1 LIMIT	23
4.6.2 MEASURING INSTRUMENTS AND SETTING	23
4.6.3 TEST PROCEDURES	23
4.6.4 TEST SETUP LAYOUT	23
4.6.5 TEST DEVIATION	23
4.6.6 EUT OPERATION DURING TEST	23
4.6.7 EUT TEST CONDITIONS	24
4.6.8 TEST RESULTS	24
4.7 PEAK TO AVERAGE RADIO	25
4.7.1 LIMIT	25
4.7.2 TEST PROCEDURES	25
4.7.3 TEST SETUP LAYOUT	25
4.7.4 TEST DEVIATION	25
4.7.5 EUT OPERATION DURING TEST	25
4.7.6 EUT TEST CONDITIONS	25
4.7.7 TEST RESULTS	25
4.7 CONDUCTED EMISSION MEASUREMENT	26
4.7.1 POWER LINE CONDUCTED EMISSION LIMITS	26
4.7.2 TEST PROCEDURE	27
4.7.3 DEVIATION FROM TEST STANDARD	27
4.7.4 TEST SETUP	27
4.7.5 EUT OPERATING CONDITIONS	27
4.7.6 EUT TEST CONDITIONS	27



Table of Contents	Page
4.7.8 TEST RESULTS	27
5. LIST OF MEASUREMENT EQUIPMENTS	28
ATTACHMENT A - RADIATED RF OUTPUT POWER	33
ATTACHMENT B - 99% OCCUPIED BANDWIDTH	36
ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	41
ATTACHMENT D - SPURIOUS RADIATED EMISSION	46
ATTACHMENT E - BAND EDGE	71
ATTACHMENT F - FREQUENCY STABILITY	74
ATTACHMENT G - PEAK TO AVERAGE RADIO	77
ATTACHMENT H - CONDUCTED EMISSION	82



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FCCP-3-1405C290	Original Issue.	Jun. 05, 2014



1. CERTIFICATION

Equipment : Mobile WiFi
Brand Name : Huawei
Model Name : E5730s-6
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer: Huawei Technologies Co.,Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,
Bantian, Longgang District, Shenzhen
Factory : Huawei Technologies Co.,Ltd.
Address : Huawei Base, Bantian, Longgang District, Shenzhen 518129, P.R.China
Date of Test : May 27, 2014 ~ Jun. 04, 2014
Test Item : ENGINEERING SAMPLE
Standard(s) : 47 CFR FCC Part 24 Subpart E & ANSI C63.4 : 2009
47 CFR FCC Part 2 & ANSI/TIA-603-C-2004

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-3-1405C290) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the GSM 1900MHz approval part of the product.



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 24 Subpart E & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
2.1047(d)	Modulation Characteristics	PASS	
2.1046 24.232(c)	Radiated RF Output	PASS	
2.1049 24.238(a)	99% Occupied Bandwidth	PASS	
2.1051 24.238(a)	Spurious Emissions at Antenna Terminal	PASS	
2.1053 24.238(a)	Spurious Radiated Emissions	PASS	
24.238(a)	Band Edge Emissions	PASS	
2.1055 24.235	Frequency Stability	PASS	
24.232(d)	Peak to Average Ratio	PASS	
15.207	Conducted Emission	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB02** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792
 Neutron's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $y \pm U$ where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2** , providing a level of confidence of approximately **95 %** .

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile WiFi		
Brand Name	Huawei		
Model Name	E5730s-6		
Model Difference	N/A		
Product Description	Operation Frequency:	TX:1850.2MHz~1909.8MHz RX:1930.2MHz~1989.8MHz	
	Modulation Type:	GMSK;8-PSK	
	EIRP Output Power	27.43 dBm	
Channel List	Please refer to the Note 2.		
Power Source	#1 DC voltage supplied from Adapter. Brand/Model:HUAWEI / HW-050200E3W #2 Supplied from Li-ion Battery Brand/Model: HUAWEI / HCB18650-12		
Power Rating	#1 I/P: AC 100-240V~50/60Hz 0.5A MAX O/P: DC 5V 2A #2 DC 3.7V 5000mAh/ 18.5Wh		
Connecting I/O Port(s)	Please refer to the User's Manual		

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
-

Band	Channel	Frequency	
		(MHz)	
1850.2MHz~1909.8MHz	512	Low	1850.20
	661	Mid	1880.00
	810	High	1909.80

- Table for Filed Antenna @GSM850

Ant.	Manufacture	Model Name	Antenna Type	Connector	Gain (dBi)
1	Skycross Electronics(Shen Zhen) Co.,Ltd. Shanghai Branch	N/A	Integral	N/A	2.94



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Worst TX Mode	Channel
Radiated RF Output	GSM	512/661/810
Spurious Radiated Emissions	GSM	512/661/810
Band Edge Emissions	GSM	512/661/810
Frequency Stability	GSM	661
99% Occupied Bandwidth	GSM	512/661/810
Spurious Emissions at Antenna Terminal	GSM	512/661/810


For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.



3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

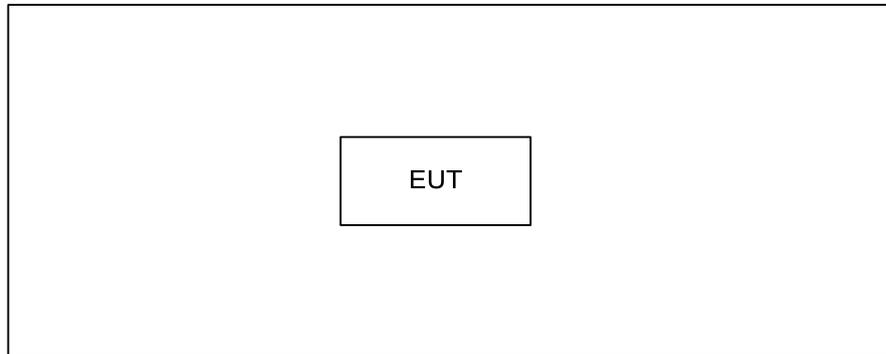

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	



4. TEST RESULT

4.1 RADIATED RF OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

The Radiated Peak Output Power shall be according to the specific rule Part 24.232(b)&RSS-133 section 6.4 that "Mobile/Portable station are limited to 2 watts e.i.r.p." and 24.232(c) &RSS-133 section 6.4 specified that "Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.

4.1.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Center Frequency	Low / middle / high channels
Span Frequency	10MHz
RB / VB	3MHz / 3MHz for Peak

4.1.3 TEST PROCEDURE

1. The EUT was set up for the maximum peak power with GSM link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (low, middle and high operational frequency range).
2. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data)
3. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
4. The substitution horn antenna is substituted for EUT at the same position, and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. "Raw" is the spectrum reading value, "SG" is signal generator export power, "TX Gain" is calibration antenna isotropic gain value, "TX cable" is the transmitted cable loss between the calibration antenna and signal generator. The "Factor" means that the transmission path loss is equal to "SG" - "TX cable" + "TX Gain" - "Raw".
5. Actually the real E.I.R.P peak power is equal to "Read Value" + "Factor"

4.1.4 TEST SETUP LAYOUT EIRP Power Measurement

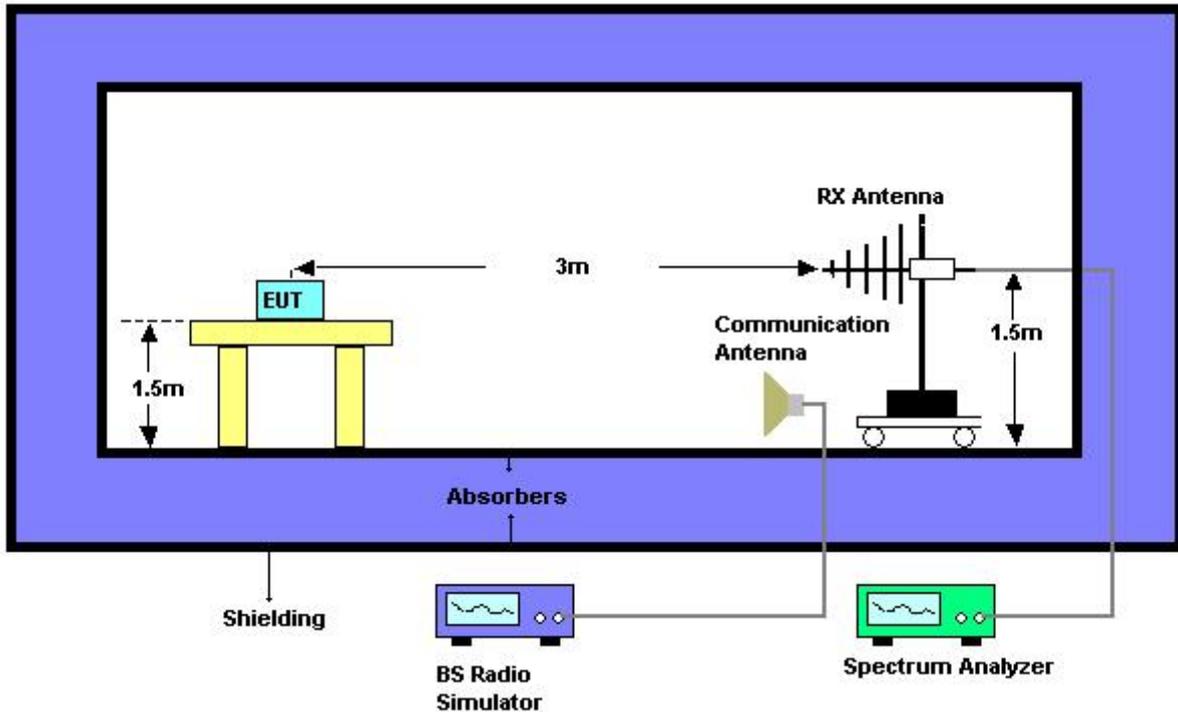

4.1.5 TEST DEVIATION

There is no deviation with the original standard.

4.1.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.1.7 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: 3.7V

4.1.8 TEST RESULTS

Please refer to the Attachment A.

4.2 99% OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 LIMIT

According to FCC 2.1049(h) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.2.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	30 kHz
VB	100 kHz
Trace	Max Hold

4.2.3 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Used measurement function of spectrum to measure the 99% occupied bandwidth..

4.2.4 TEST SETUP LAYOUT

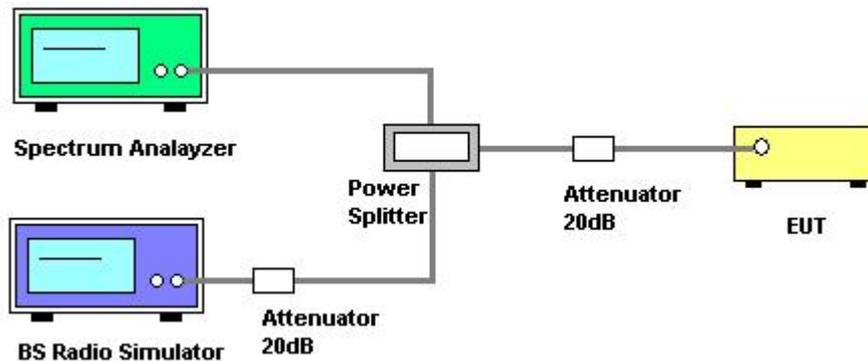

4.2.5 TEST DEVIATION

There is no deviation with the original standard.

4.2.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.2.7 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: 3.7V



4.2.8 TEST RESULTS

Please refer to the Attachment B.

4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT

4.3.1 LIMIT

In the FCC 22.917(a)&RSS-132 section 5.5, on any frequency outside a licensee’s frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (2 to 0.003W). At 2W(Power Control Level 5) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm

4.3.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30MHz
Stop Frequency	10th carrier harmonic
RB / VB	1 MHz / 1MHz for Peak

4.3.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with **GSM/EDGE** link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 128, 190 and 251(low, middle and high operational frequency range.)
2. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
3. When the spectrum scanned from 30MHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
4. When the spectrum scanned from 3GHz to 10GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

4.3.4 TEST SETUP LAYOUT

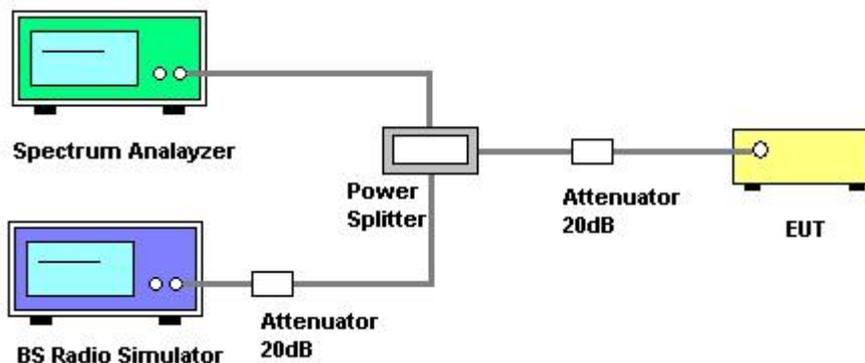

4.3.5 TEST DEVIATION

There is no deviation with the original standard.

4.3.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.



4.3.7 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: 3.7V

4.3.8 TEST RESULTS

Please refer to the Attachment C.



4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT

Out of band emissions, The power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside the frequency block. The spurious emissions of limit equal to -13dBm .

4.4.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	10th carrier harmonic
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	1 MHz / 1MHz
Attenuation	Positive Peak

4.4.3 TEST PROCEDURES

1. The EUT was placed on the top of the turntable in fully anechoic chamber.
2. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. This measurement shall be repeated with the transmitter in standby mode where applicable.
4. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For 1~10th carrier harmonic measurement, the receiving Horn antenna was placed 1.5 meters far away from the turntable.
5. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
6. Replace the EUT by standard antenna and feed the RF port by signal generator.
7. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
8. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
9. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.



4.4.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.4.5 TEST DEVIATION

There is no deviation with the original standard.

4.4.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.4.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: 3.7V

4.4.8 TEST RESULTS

Please refer to the Attachment D.



4.5 BAND EDGE MEASUREMENT

4.5.1 LIMIT

According to FCC 22.917(a)&RSS-132 section 5.5 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB . In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

4.5.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	5 MHz
RB / VB	10 kHz /30 kHz
Trace	Sample
Sweep Time	Auto

4.5.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with **GSM/EDGE** link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 128 and 251(low and high operational frequency range.)
2. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
3. The center frequency of spectrum is the band edge frequency and span is 2 MHz. RB of the spectrum is 10kHz and VB of the spectrum is 30KHz.
4. Record the Sample trace plot into the test report.

4.5.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.5.5 TEST DEVIATION

There is no deviation with the original standard.

4.5.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.5.7 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: 3.7V



4.5.8 TEST RESULTS

Please refer to the Attachment E.

4.6 FREQUENCY STABILITY MEASUREMENT

4.6.1 LIMIT

According to the FCC part 22.355&RSS-132 section 5.3 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 2.5 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C}\sim 50^{\circ}\text{C}$.

4.6.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the BS Simulator.

Spectrum Parameters	Setting
Frequency Error	The maximum of transmit frequency error

4.6.3 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the BS Simulator.
2. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.
3. BS simulator used the frequency error function and measured the peak frequency error. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.1 Volts to 4.3 Volts. Each step shall be record the frequency error rate.
5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
6. Extreme temperature rule is $0^{\circ}\text{C}\sim 40^{\circ}\text{C}$.

4.6.4 TEST SETUP LAYOUT

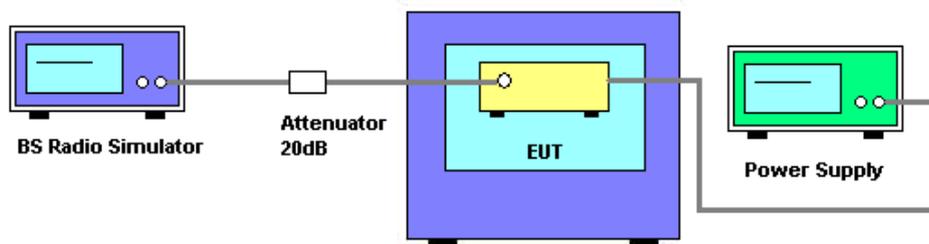

4.6.5 TEST DEVIATION

There is no deviation with the original standard.

4.6.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.



4.6.7 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: 3.7V

4.6.8 TEST RESULTS

Please refer to the Attachment F.



4.7 PEAK TO AVERAGE RADIO

4.7.1 LIMIT

In the FCC 24.232 (d) & RSS-133 section 6.4

Peak transmit power shall be measured over any interval of continuous transmission using instrumentation calibrated in terms of rms-equivalent voltage.

The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

To measure transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission shall not exceed 13 dB.

4.7.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;

4.7.3 TEST SETUP LAYOUT

Please refer to section 3.4 in this report.

4.7.4 TEST DEVIATION

There is no deviation with the original standard.

4.7.5 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.7.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: 3.7V

4.7.7 TEST RESULTS

Please refer to the Attachment G.



4.7 CONDUCTED EMISSION MEASUREMENT

4.7.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.7.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

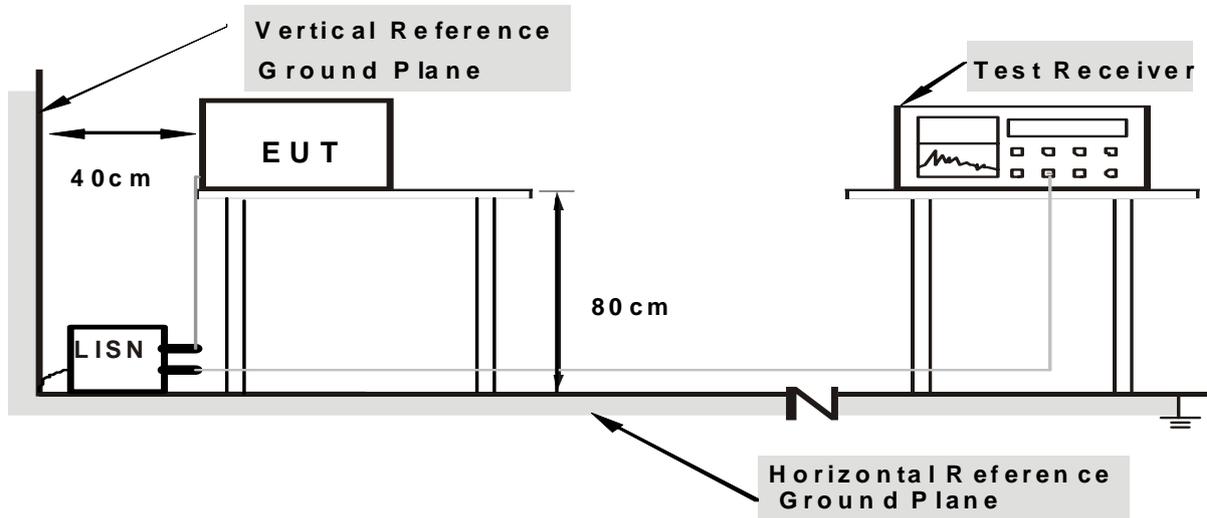

- Note:**
- 1. Support units were connected to second LISN .
 - 2. Both of LISN s (AM N) are 80 cm from EUT and at least 80 from other units and other metal planes

4.7.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.7.6 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: 120V/60Hz

4.7.8 TEST RESULTS

Please refer to the Attachment H.



5. LIST OF MEASUREMENT EQUIPMENTS

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov. 11, 2014
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Nov. 11, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 29, 2015
2	Amplifier	HP	8447D	2944A09673	Mar. 29, 2015
3	Receiver	AGILENT	N9038A	MY52130039	Aug. 24, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Mar. 29, 2015
6	Amplifier	Agilent	8449B	3008A02274	Mar. 29, 2015
7	Receiver	AGILENT	N9038A	MY52130039	Aug. 24, 2014
8	Test Cable	HUBER+SUHNER	C-48	N/A	Apr. 30, 2015
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Mar. 29, 2015
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Mar. 29, 2015
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Feb. 22, 2015

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Band Edge Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

99% Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014



Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May. 24, 2015



Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.



**Radiated Measurement Photos
9KHz to 30MHz**



**Radiated Measurement Photos
30MHz to 1000MHz**

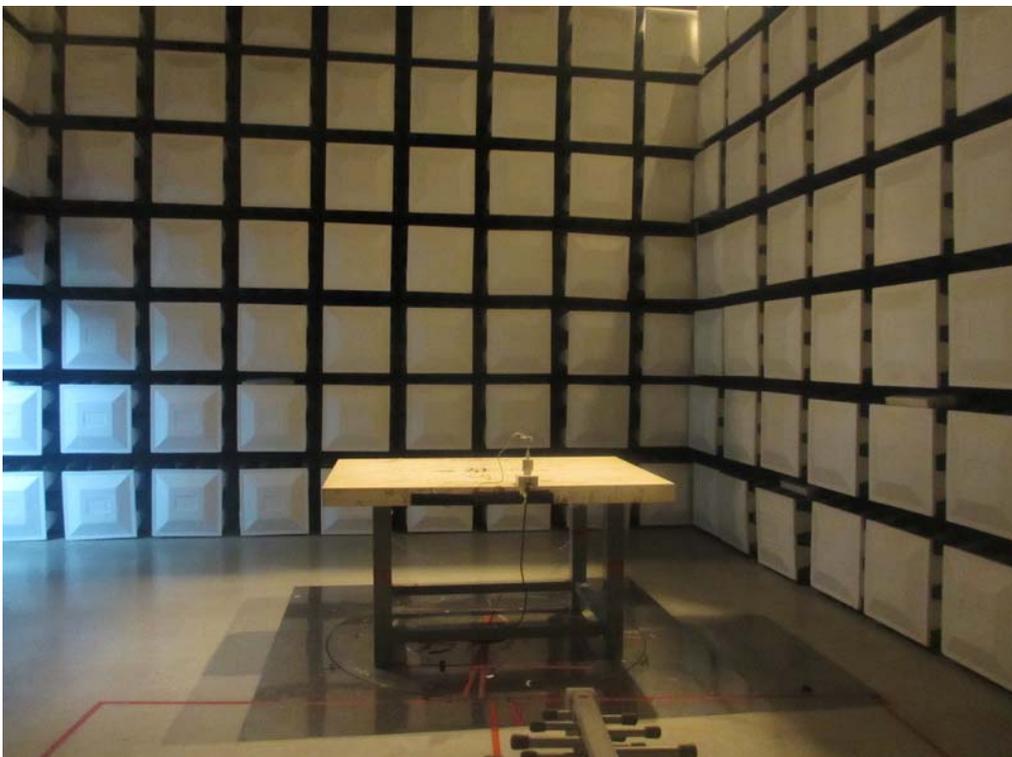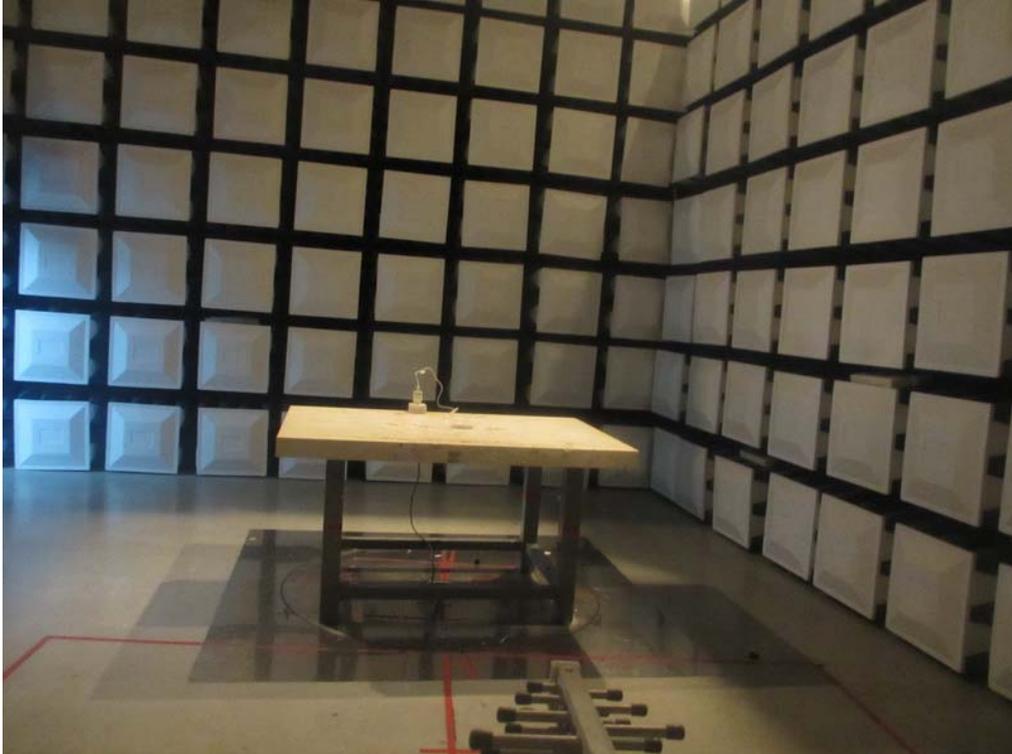

**Radiated Measurement Photos
Above 1000MHz**





ATTACHMENT A - RADIATED RF OUTPUT POWER



Test Mode : TX CH 512/661/810-GPRS

GSM 1900		EIRP Power(dBm)			Max. Limit (dBm)	Result
		Channel 512	Channel 661	Channel 810		
GPRS	V	26.41	25.01	26.60	33	Complies
	H	25.51	27.34	27.43	33	Complies

GSM 1900		Conducted Power(dBm)			Result
		Channel 512	Channel 661	Channel 810	
GPRS	1TX Slot	29.69	29.66	29.63	Complies
	2TX Slot	28.81	28.69	28.16	
	3TX Slot	27.12	27.48	27.48	
	4TX Slot	26.95	26.56	26.55	

REMARKS:

1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) +Ant Gain(dBi)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)
3. The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).
4. The antenna gain is 2.94dBi



Test Mode : TX CH 512/661/810-EDGE

GSM 1900		EIRP Power(dBm)			Max. Limit (dBm)	Result
		Channel 512	Channel 661	Channel 810		
EDGE	V	25.89	25.68	23.60	33	Complies
	H	25.01	26.84	26.98	33	Complies

GSM 1900		Conducted Power(dBm)			Result
		Channel 512	Channel 661	Channel 810	
EDGE	1TX Slot	24.68	24.62	24.72	Complies
	2TX Slot	24.06	23.98	23.44	
	3TX Slot	22.98	22.32	22.31	
	4TX Slot	21.55	21.21	20.43	

REMARKS:

1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) +Ant Gain(dBi)
5. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)
6. The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).
7. The antenna gain is 2.94dBi




ATTACHMENT B - 99% OCCUPIED BANDWIDTH



Test Mode : TX Mode Configuration GPRS				
Channel	Frequency	99% OBW (MHz)	-26dBc Bandwidth(MHz)	Result
512	1850.20MHz	0.252	0.336	Complies
661	1880.00 MHz	0.254	0.334	Complies
810	1909.80 MHz	0.252	0.334	Complies


99% Occupied Bandwidth channel 512

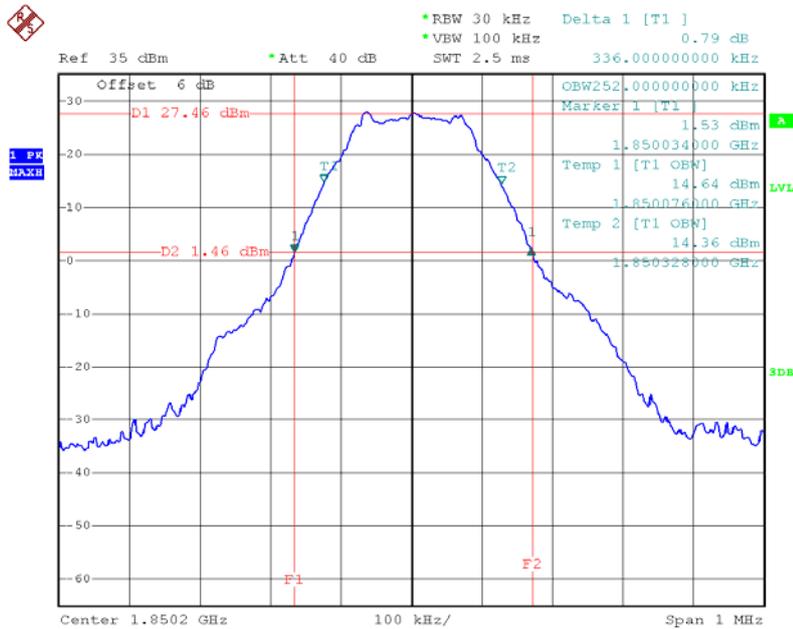

Date: 31.MAY.2014 16:41:36




99% Occupied Bandwidth channel 661

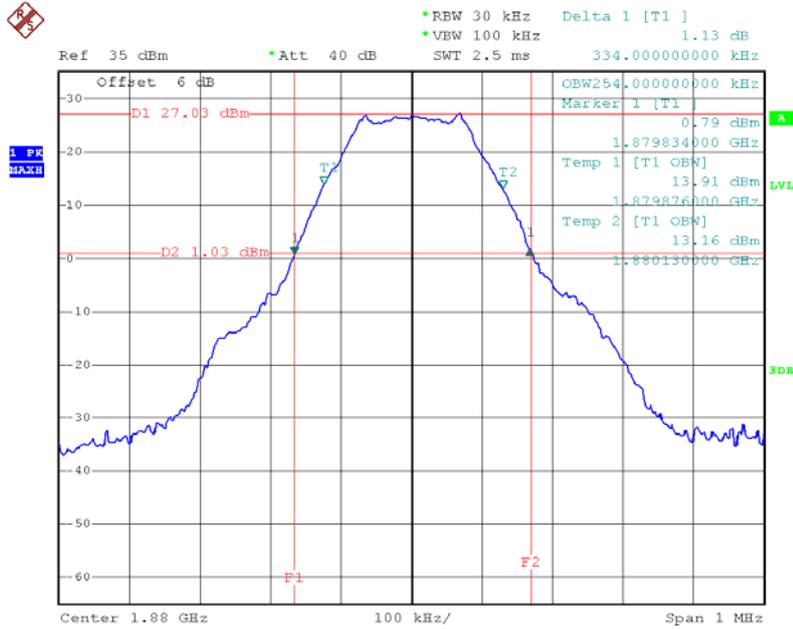

Date: 31.MAY.2014 16:45:45

99% Occupied Bandwidth channel 810

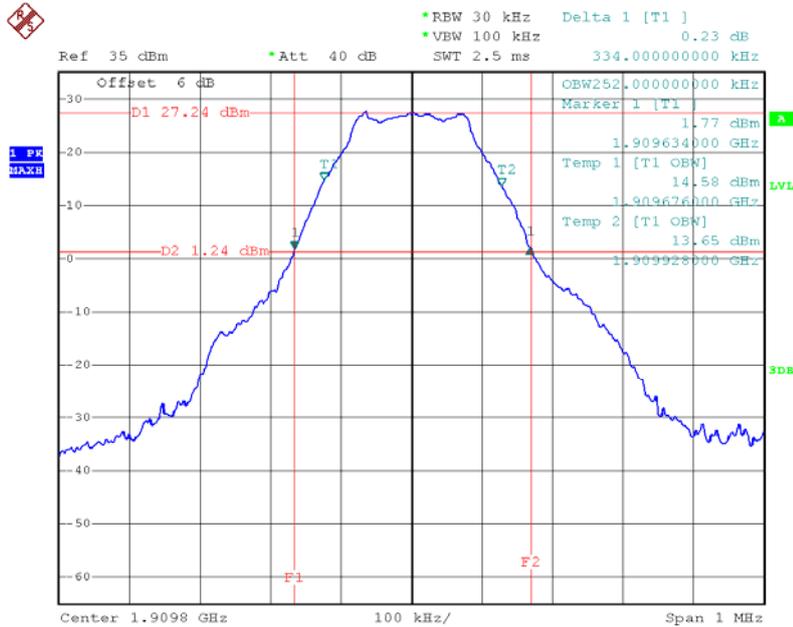


Date: 31.MAY.2014 16:50:16



Test Mode : TX Mode Configuration EDGE				
Channel	Frequency	99% OBW (MHz)	-26dBc Bandwidth(MHz)	Result
512	1850.20MHz	0.252	0.336	Complies
661	1880.00 MHz	0.252	0.334	Complies
810	1909.80 MHz	0.252	0.336	Complies


99% Occupied Bandwidth channel 512

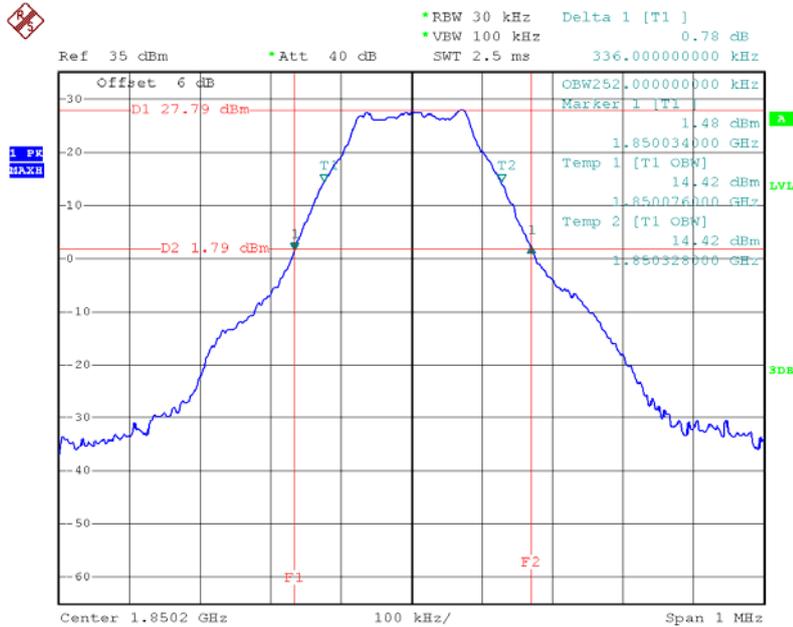

Date: 31.MAY.2014 15:39:19




99% Occupied Bandwidth channel 661

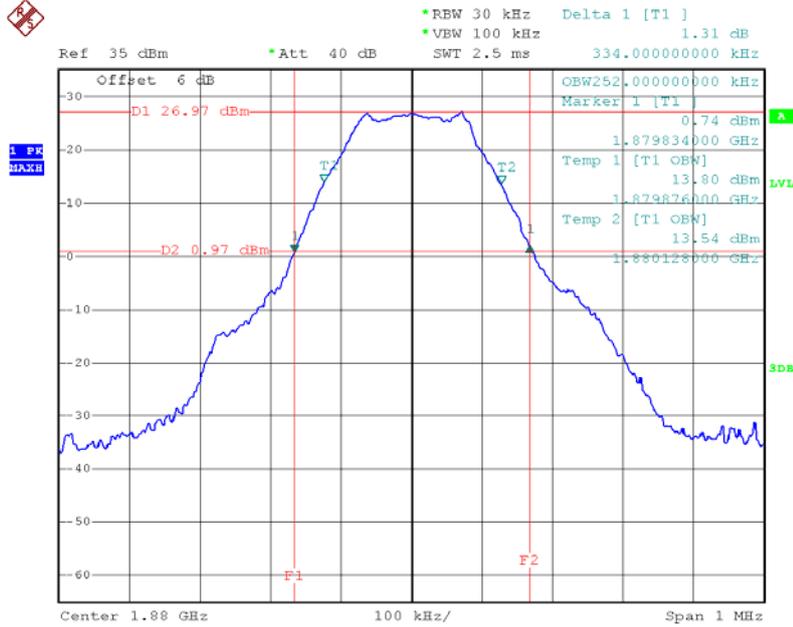

Date: 31.MAY.2014 15:45:42

99% Occupied Bandwidth channel 810

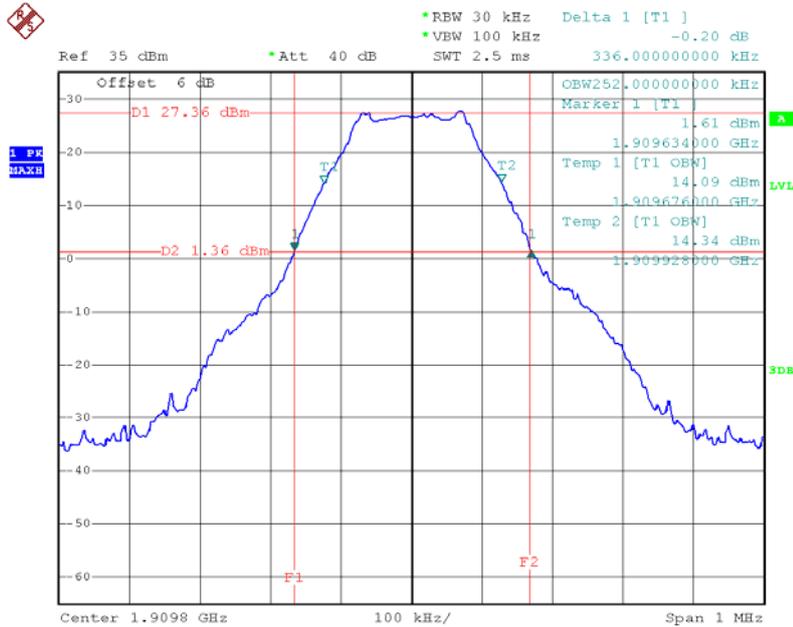


Date: 31.MAY.2014 15:52:38



**ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA
TERMINALS**




Conducted Spurious of Configuration- GPRS channel 512

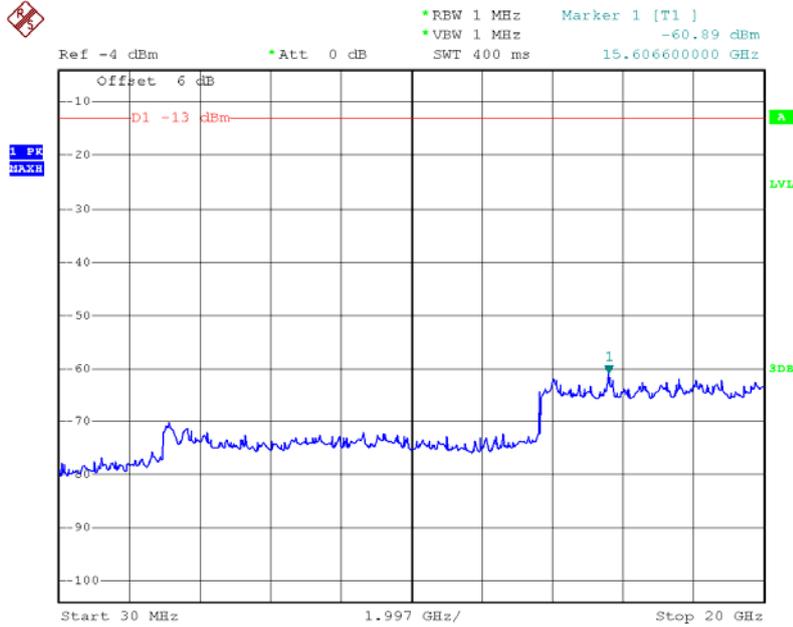

Date: 31.MAY.2014 16:38:32


Conducted Spurious of Configuration- GPRS channel 661

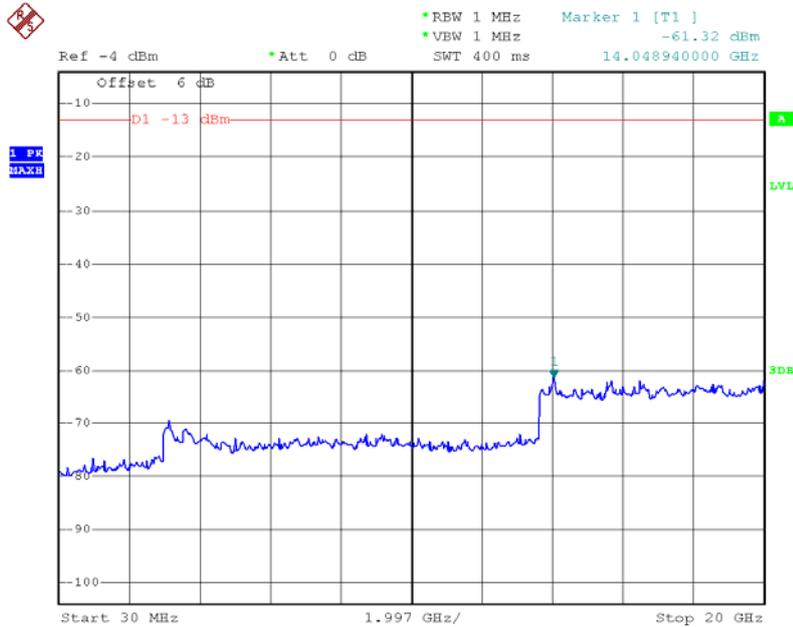

Date: 31.MAY.2014 15:59:02




Conducted Spurious of Configuration- GPRS channel 810

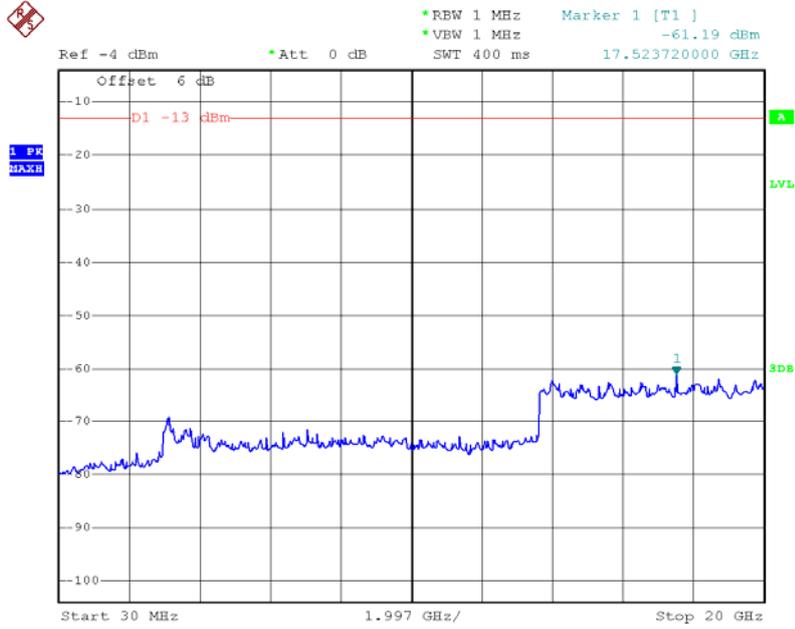

Date: 31.MAY.2014 16:48:44




Conducted Spurious of Configuration- EDGE channel 512

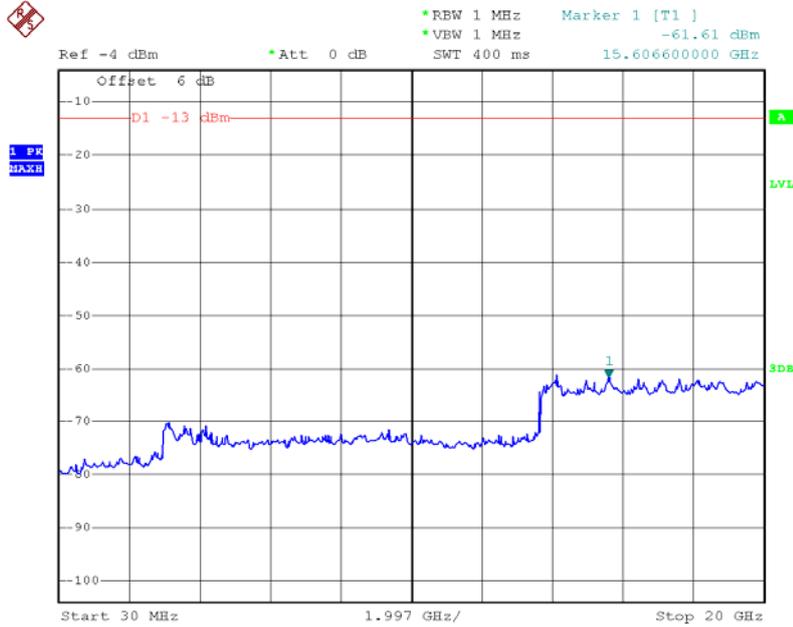

Date: 31.MAY.2014 15:57:42


Conducted Spurious of Configuration- EDGE channel 661

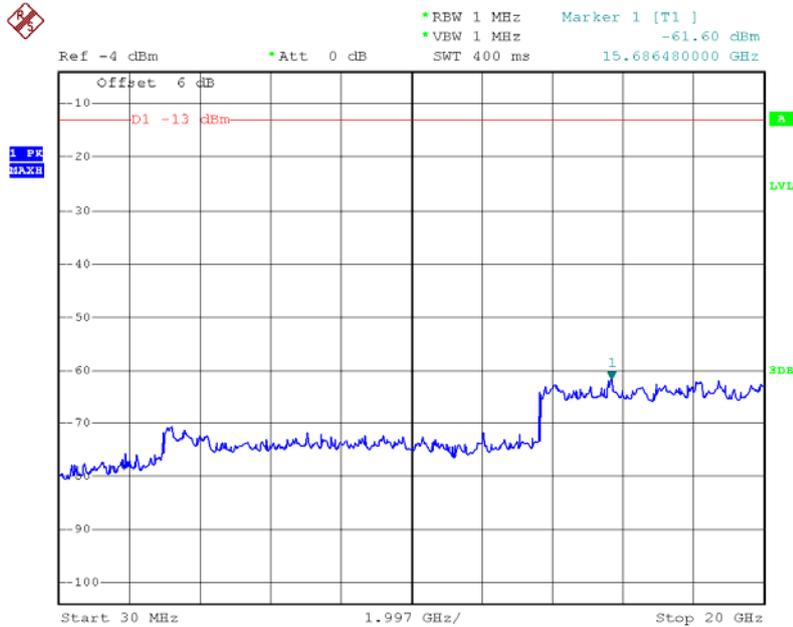

Date: 31.MAY.2014 15:57:58



Conducted Spurious of Configuration- EDGE channel 810

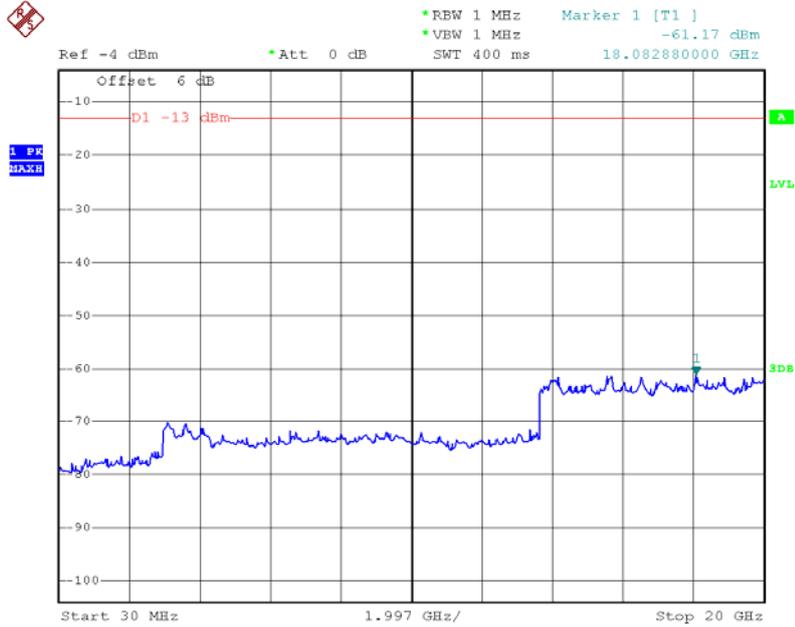

Date: 31.MAY.2014 15:58:16




ATTACHMENT D - SPURIOUS RADIATED EMISSION



Test Mode : TX CH512/ GPRS

Vertical

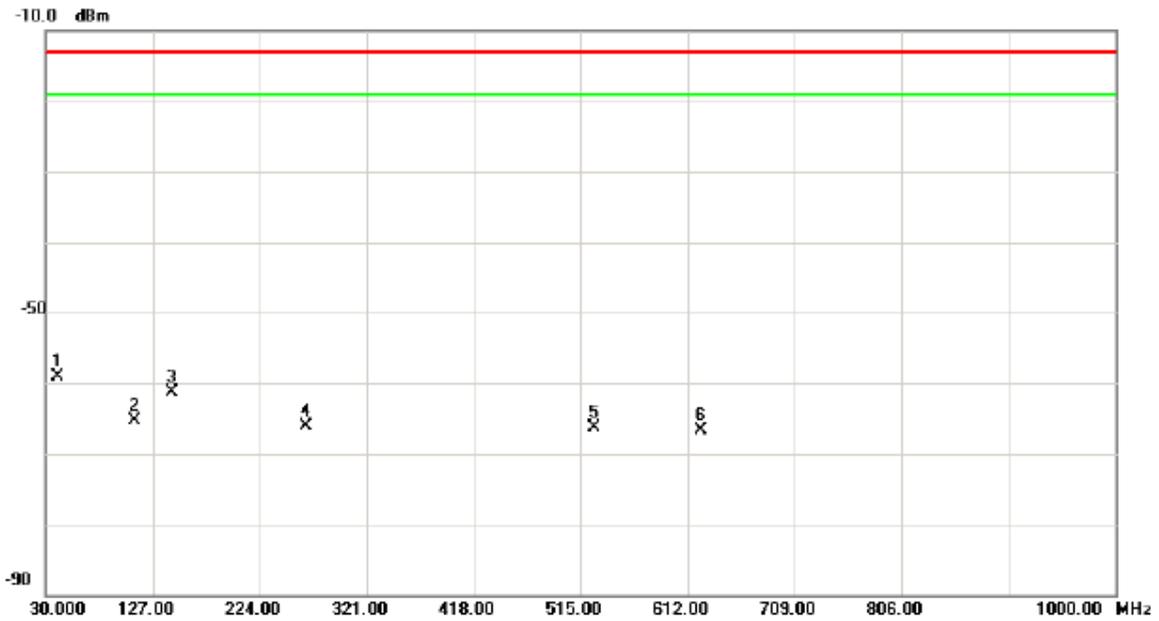


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	40.6700	-58.26	-0.86	-59.12	-13.0	-46.12	peak	
2		110.5100	-74.14	8.91	-65.23	-13.0	-52.23	peak	
3		144.4600	-64.10	2.83	-61.27	-13.0	-48.27	peak	
4		265.7100	-67.22	1.19	-66.03	-13.0	-53.03	peak	
5		527.6100	-72.21	6.00	-66.21	-13.0	-53.21	peak	
6		623.6400	-74.19	7.56	-66.63	-13.0	-53.63	peak	



Test Mode : TX CH512/ GPRS

Horizontal

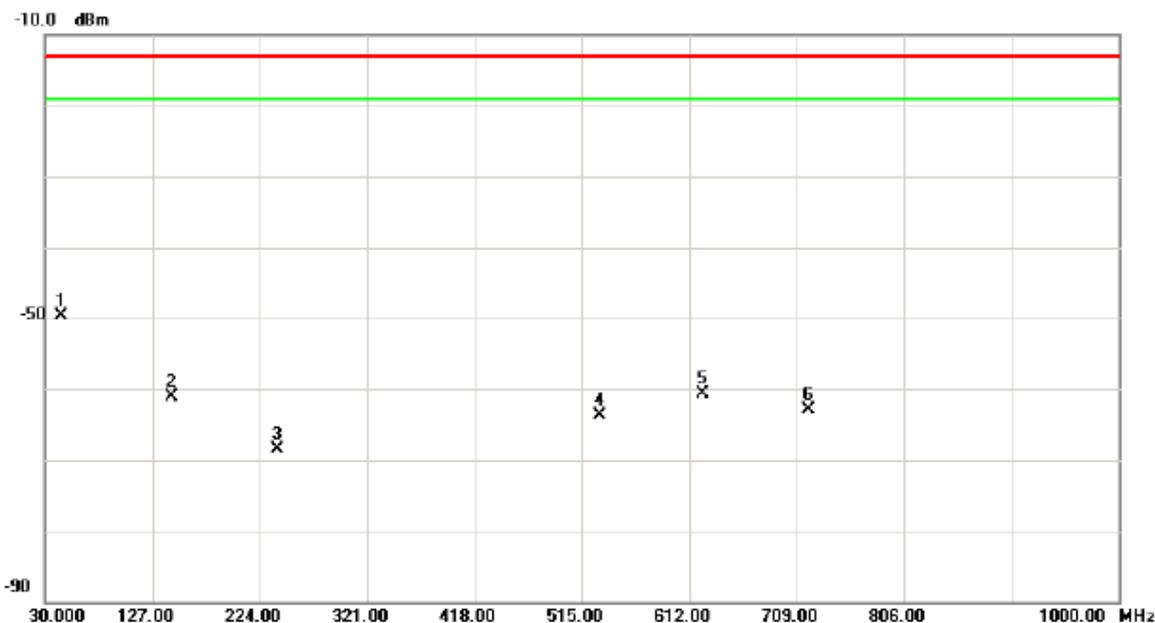


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	44.5500	-55.64	5.87	-49.77	-13.0	-36.77	peak	
2		144.4600	-60.76	-0.42	-61.18	-13.0	-48.18	peak	
3		240.4900	-71.01	2.50	-68.51	-13.0	-55.51	peak	
4		531.4900	-69.51	5.83	-63.68	-13.0	-50.68	peak	
5		623.6400	-70.25	9.54	-60.71	-13.0	-47.71	peak	
6		719.6700	-72.23	9.32	-62.91	-13.0	-49.91	peak	



Test Mode : TX CH661/ GPRS

Vertical

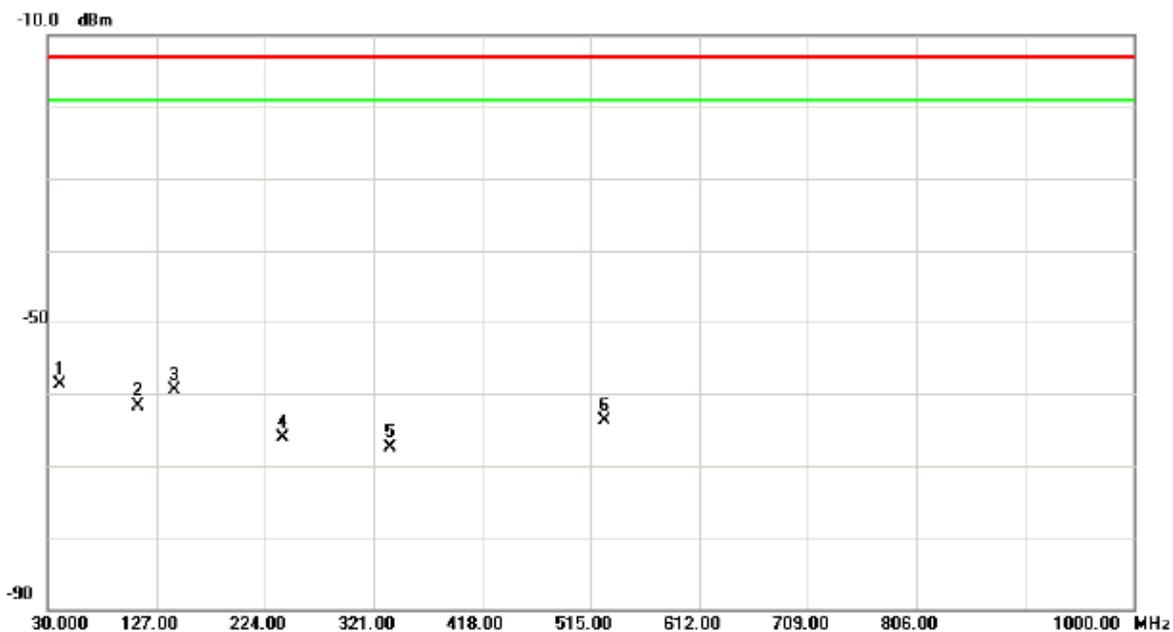


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	40.6700	-57.76	-0.86	-58.62	-13.0	-45.62	peak	
2		110.5100	-70.64	8.91	-61.73	-13.0	-48.73	peak	
3		143.4900	-62.30	2.84	-59.46	-13.0	-46.46	peak	
4		240.4900	-64.50	-1.50	-66.00	-13.0	-53.00	peak	
5		335.5500	-71.20	3.60	-67.60	-13.0	-54.60	peak	
6		527.6100	-69.71	6.00	-63.71	-13.0	-50.71	peak	



Test Mode : TX CH661/ GPRS

Horizontal

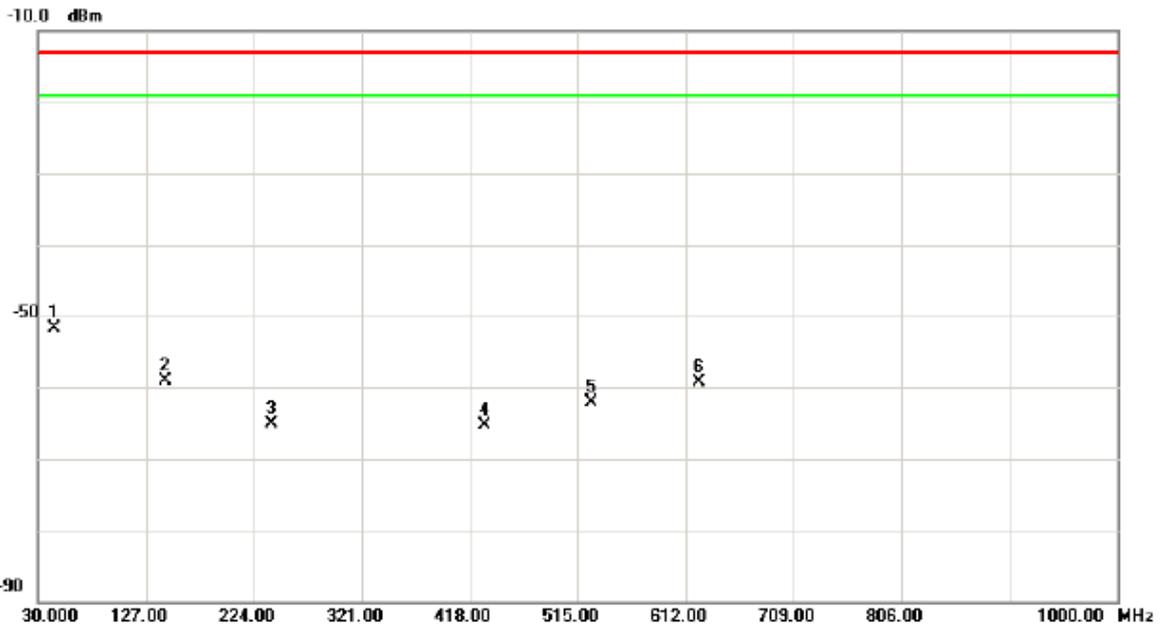

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	44.5500	-57.64	5.87	-51.77	-13.0	-38.77	peak	
2		144.4600	-58.76	-0.42	-59.18	-13.0	-46.18	peak	
3		240.4900	-67.51	2.50	-65.01	-13.0	-52.01	peak	
4		431.5800	-69.01	3.81	-65.20	-13.0	-52.20	peak	
5		527.6100	-67.96	5.85	-62.11	-13.0	-49.11	peak	
6		623.6400	-68.75	9.54	-59.21	-13.0	-46.21	peak	



Test Mode : TX CH810/ GPRS

Vertical




No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		41.6400	-60.89	-0.66	-61.55	-13.0	-48.55	peak	
2	*	143.4900	-64.30	2.84	-61.46	-13.0	-48.46	peak	
3		240.4900	-62.50	-1.50	-64.00	-13.0	-51.00	peak	
4		335.5500	-71.20	3.60	-67.60	-13.0	-54.60	peak	
5		527.6100	-72.21	6.00	-66.21	-13.0	-53.21	peak	
6		719.6700	-74.12	9.09	-65.03	-13.0	-52.03	peak	



Test Mode : TX CH810/ GPRS

Horizontal

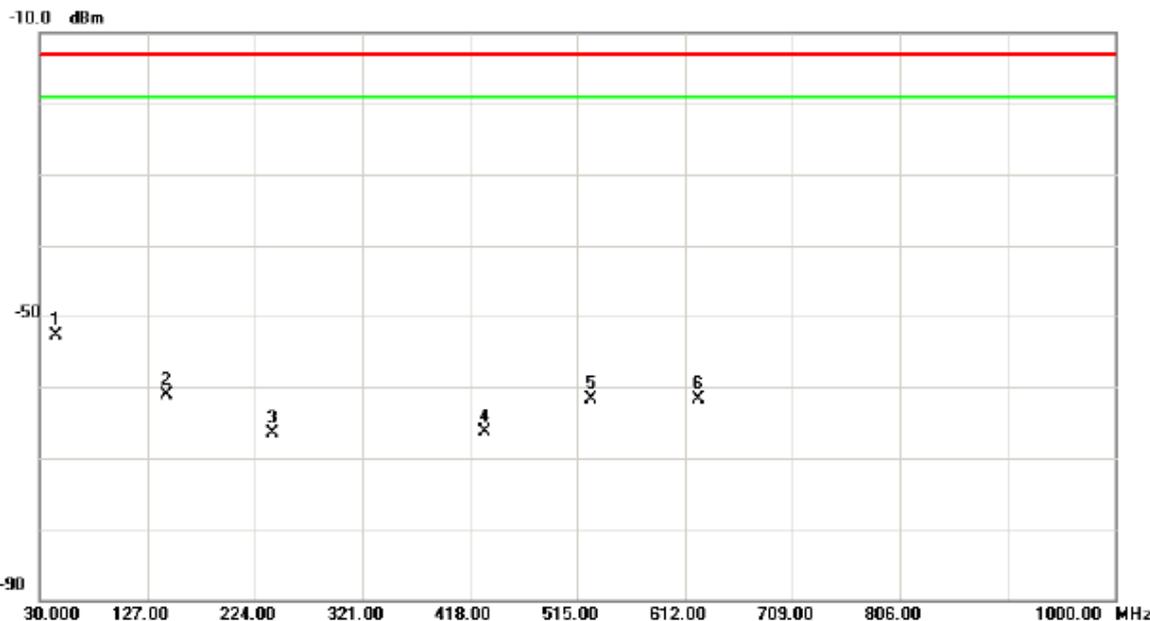


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	44.5500	-58.64	5.87	-52.77	-13.0	-39.77	peak	
2		144.4600	-60.76	-0.42	-61.18	-13.0	-48.18	peak	
3		240.4900	-69.01	2.50	-66.51	-13.0	-53.51	peak	
4		431.5800	-70.01	3.81	-66.20	-13.0	-53.20	peak	
5		527.6100	-67.46	5.85	-61.61	-13.0	-48.61	peak	
6		623.6400	-71.25	9.54	-61.71	-13.0	-48.71	peak	



Test Mode : TX CH512/EDGE

Vertical

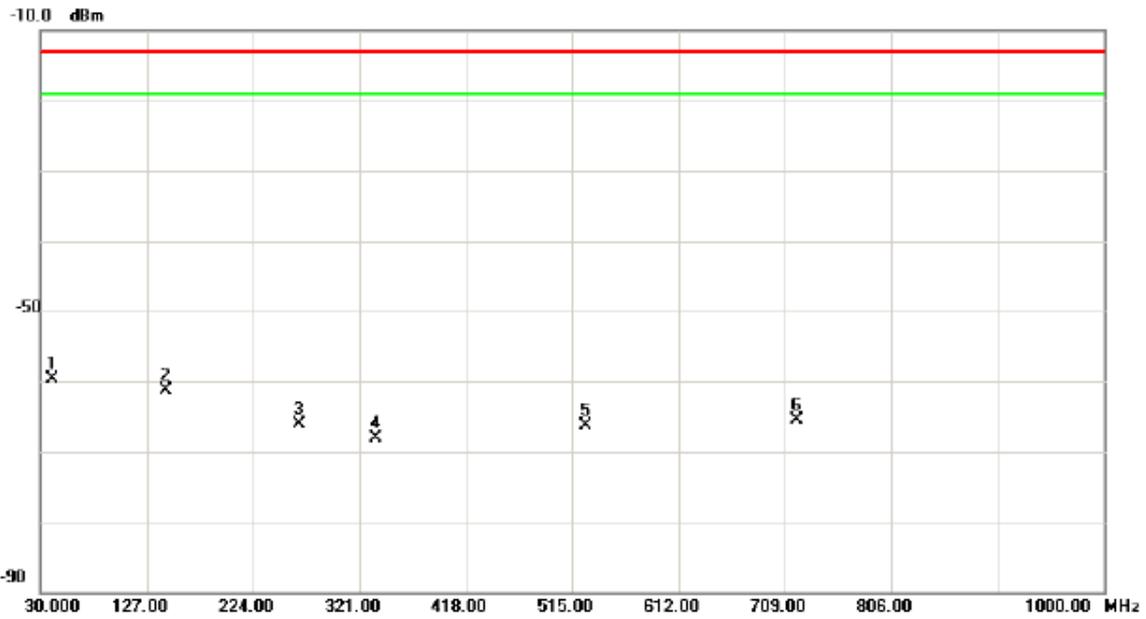


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	40.6700	-58.76	-0.86	-59.62	-13.0	-46.62	peak	
2		144.4600	-64.10	2.83	-61.27	-13.0	-48.27	peak	
3		265.7100	-67.22	1.19	-66.03	-13.0	-53.03	peak	
4		335.5500	-71.70	3.60	-68.10	-13.0	-55.10	peak	
5		527.6100	-72.21	6.00	-66.21	-13.0	-53.21	peak	
6		719.6700	-74.62	9.09	-65.53	-13.0	-52.53	peak	



Test Mode : TX CH512/EDGE

Horizontal

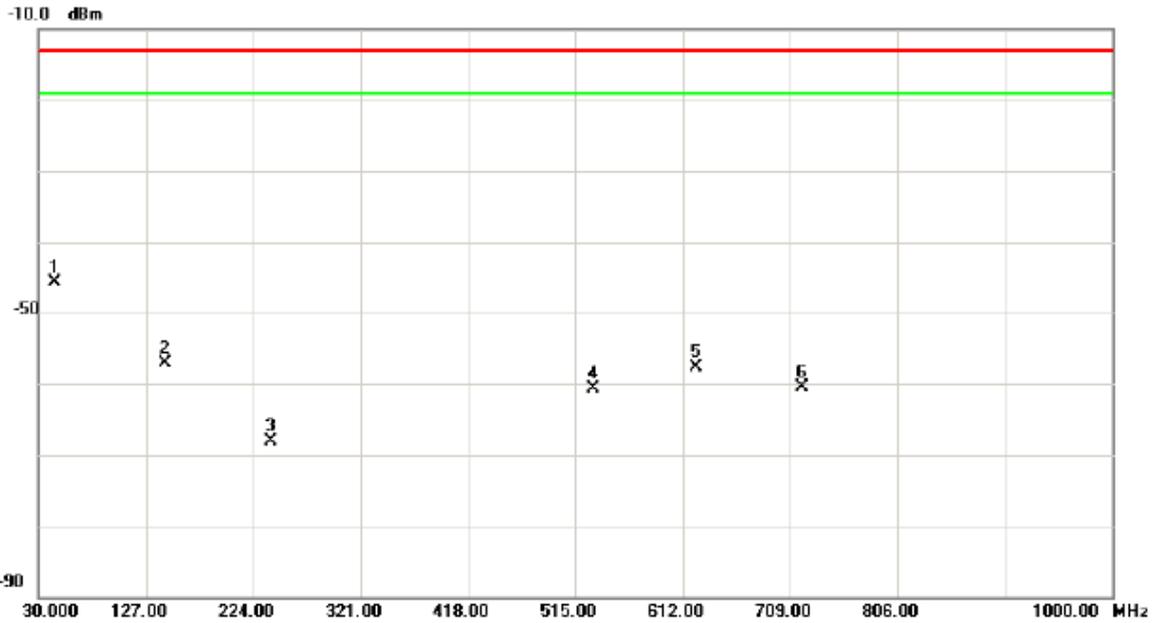


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	44.5500	-51.64	5.87	-45.77	-13.0	-32.77	peak	
2		144.4600	-56.76	-0.42	-57.18	-13.0	-44.18	peak	
3		240.4900	-70.51	2.50	-68.01	-13.0	-55.01	peak	
4		531.4900	-66.51	5.83	-60.68	-13.0	-47.68	peak	
5		623.6400	-67.25	9.54	-57.71	-13.0	-44.71	peak	
6		719.6700	-69.73	9.32	-60.41	-13.0	-47.41	peak	



Test Mode : TX CH661/ EDGE

Vertical

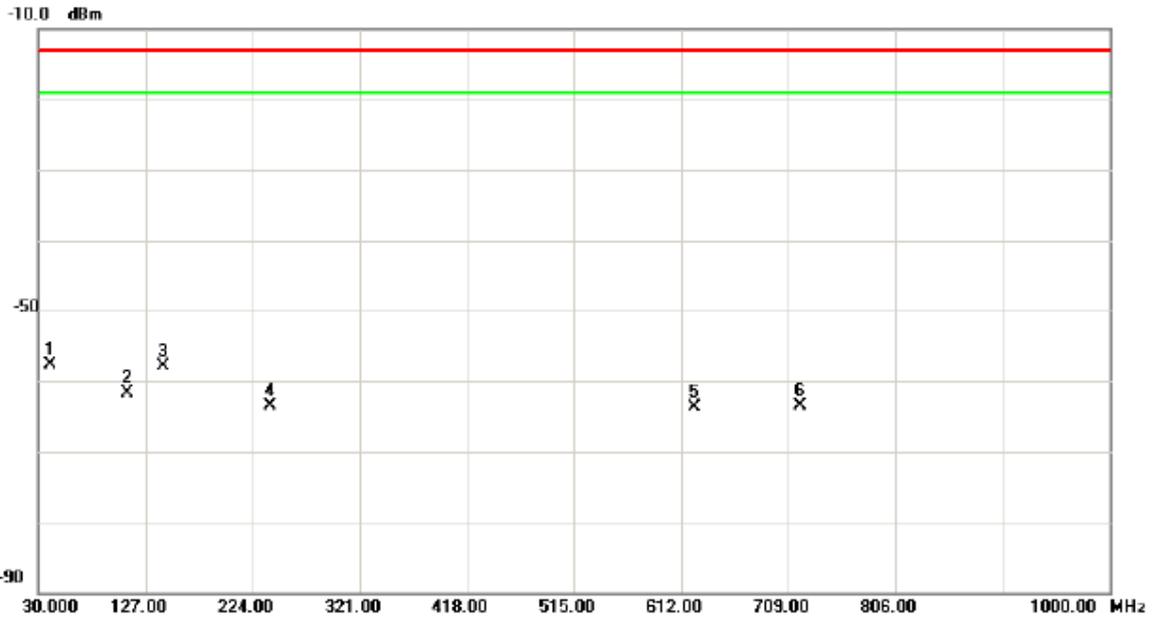


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	40.6700	-56.76	-0.86	-57.62	-13.0	-44.62	peak	
2		110.5100	-70.64	8.91	-61.73	-13.0	-48.73	peak	
3		143.4900	-60.80	2.84	-57.96	-13.0	-44.96	peak	
4		240.4900	-62.00	-1.50	-63.50	-13.0	-50.50	peak	
5		623.6400	-71.19	7.56	-63.63	-13.0	-50.63	peak	
6		719.6700	-72.62	9.09	-63.53	-13.0	-50.53	peak	



Test Mode : TX CH661/ EDGE

Horizontal

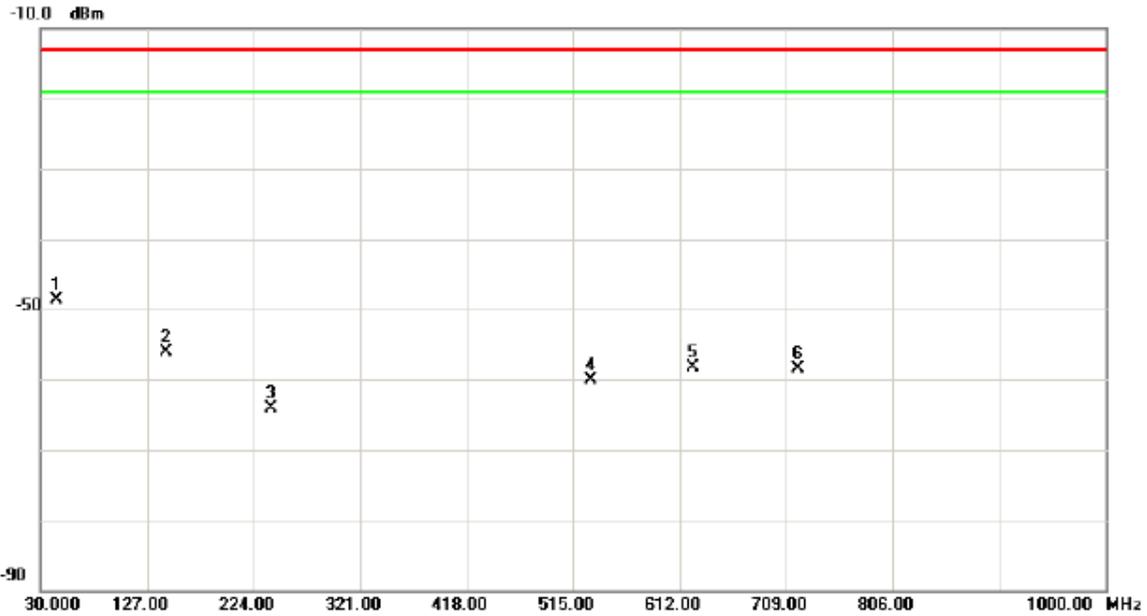


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	44.5500	-54.64	5.87	-48.77	-13.0	-35.77	peak	
2		144.4600	-55.76	-0.42	-56.18	-13.0	-43.18	peak	
3		240.4900	-66.51	2.50	-64.01	-13.0	-51.01	peak	
4		531.4900	-66.01	5.83	-60.18	-13.0	-47.18	peak	
5		623.6400	-67.75	9.54	-58.21	-13.0	-45.21	peak	
6		719.6700	-67.73	9.32	-58.41	-13.0	-45.41	peak	



Test Mode : TX CH810/ EDGE

Vertical

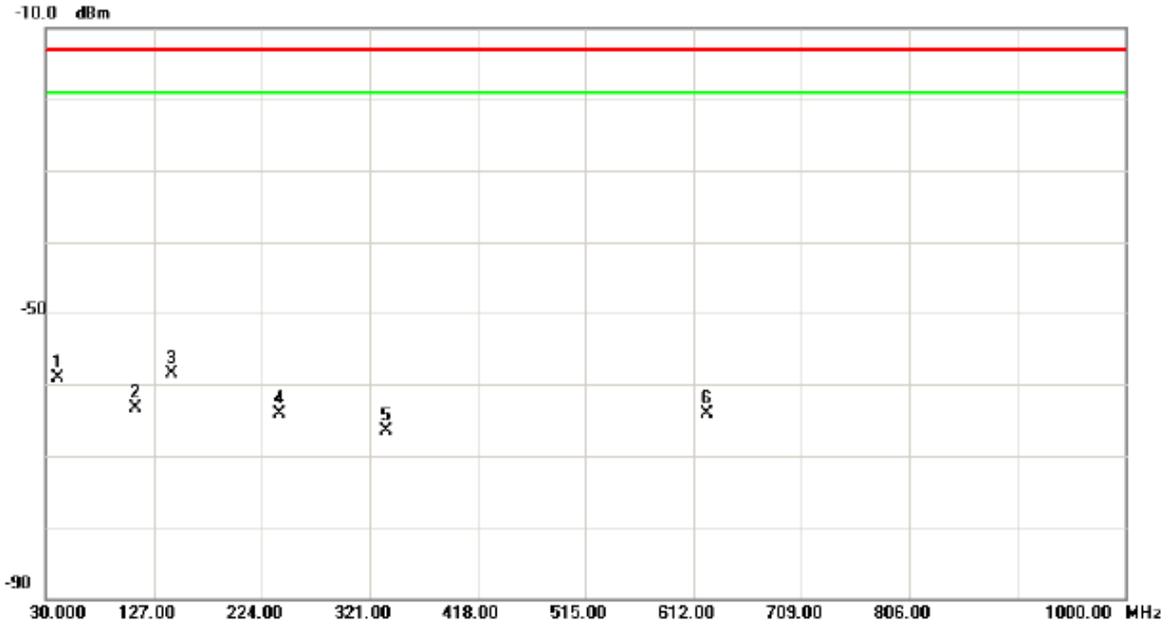


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		40.6700	-58.26	-0.86	-59.12	-13.0	-46.12	peak	
2		110.5100	-72.14	8.91	-63.23	-13.0	-50.23	peak	
3	*	143.4900	-61.30	2.84	-58.46	-13.0	-45.46	peak	
4		240.4900	-62.50	-1.50	-64.00	-13.0	-51.00	peak	
5		335.5500	-70.20	3.60	-66.60	-13.0	-53.60	peak	
6		623.6400	-71.69	7.56	-64.13	-13.0	-51.13	peak	



Test Mode : TX CH810/ EDGE

Horizontal

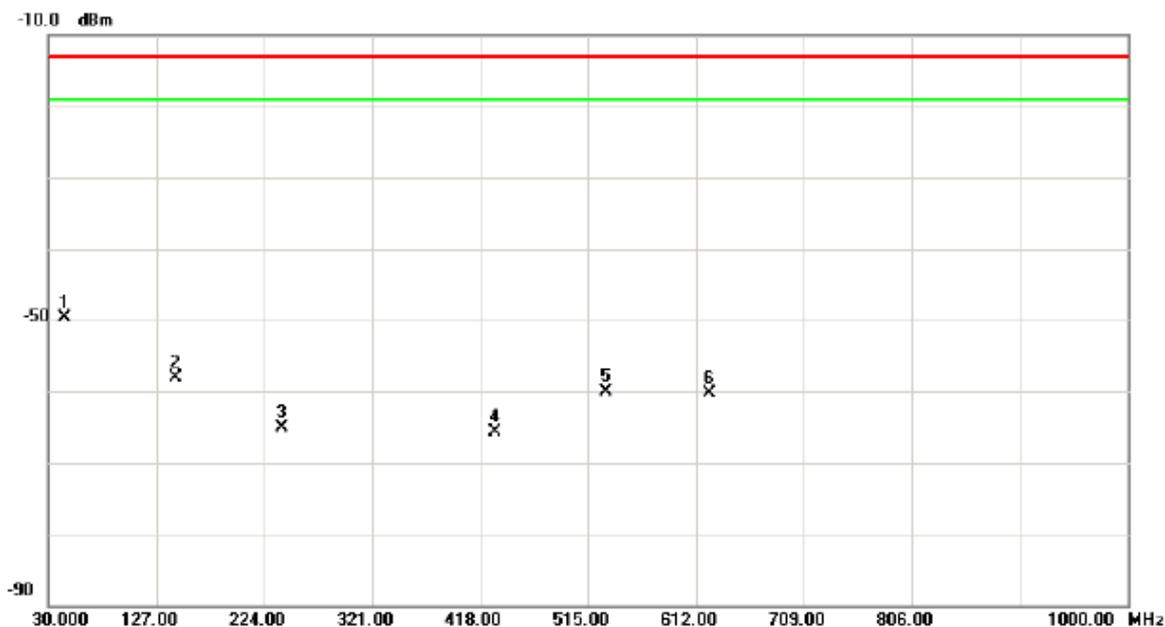


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	44.5500	-55.64	5.87	-49.77	-13.0	-36.77	peak	
2		144.4600	-57.76	-0.42	-58.18	-13.0	-45.18	peak	
3		240.4900	-67.51	2.50	-65.01	-13.0	-52.01	peak	
4		431.5800	-69.51	3.81	-65.70	-13.0	-52.70	peak	
5		531.4900	-66.01	5.83	-60.18	-13.0	-47.18	peak	
6		623.6400	-69.75	9.54	-60.21	-13.0	-47.21	peak	



Test Mode : TXCH512/ GPRS

Vertical

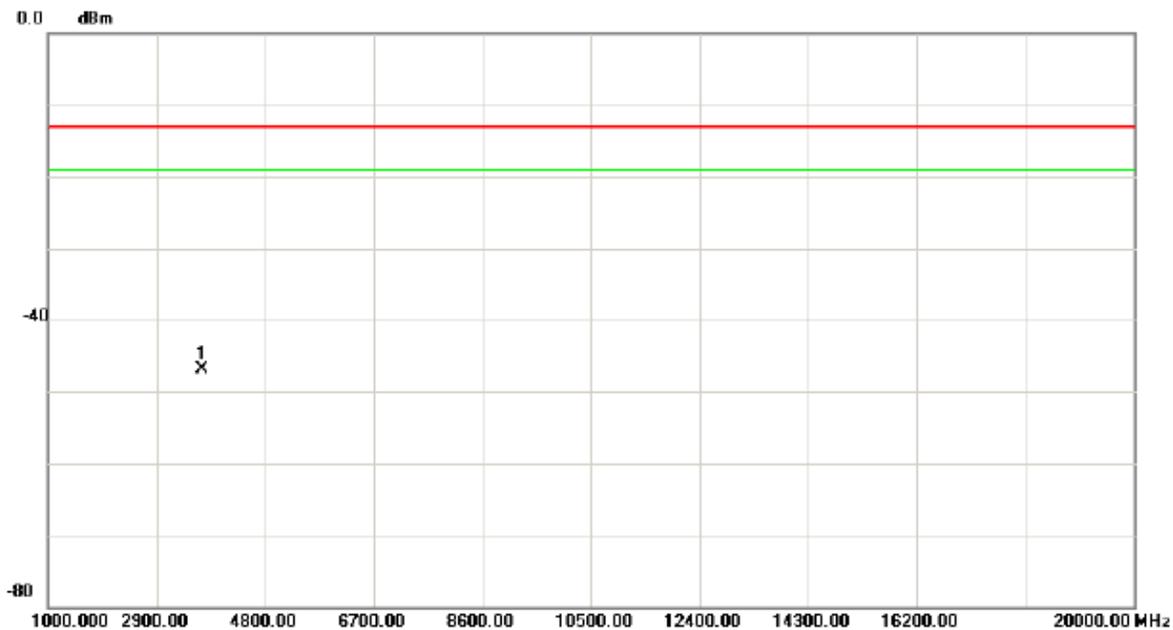

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	3700.920	-66.23	19.33	-46.90	-13.0	-33.90	peak	



Test Mode : TXCH512/ GPRS

Horizontal




No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	3700.720	-68.25	15.26	-52.99	-13.0	-39.99	peak	



Test Mode : TX CH661/ GPRS

Vertical

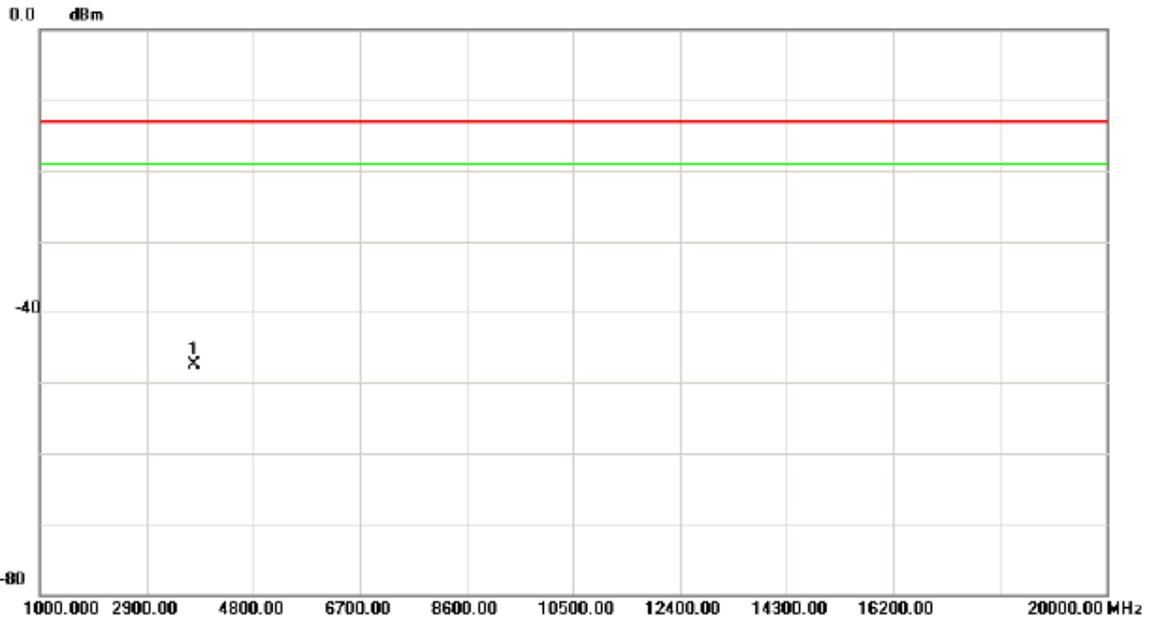


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	3760.810	-67.45	19.98	-47.47	-13.0	-34.47	peak	



Test Mode : TX CH661/ GPRS

Horizontal

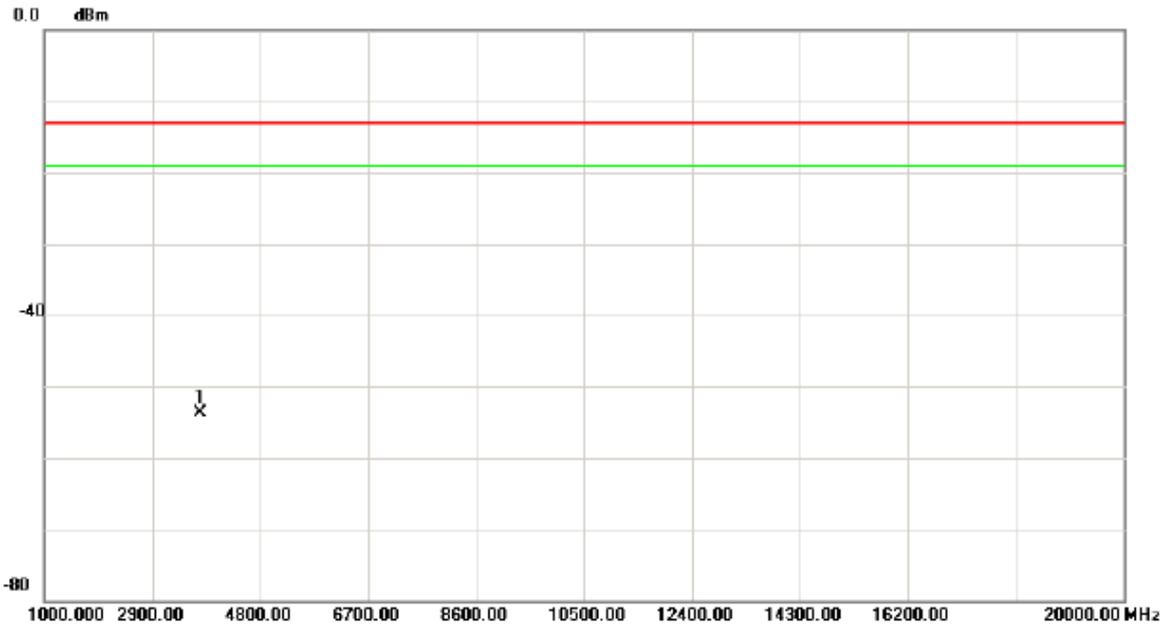


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	3760.130	-69.32	15.65	-53.67	-13.0	-40.67	peak	



Test Mode : TX CH810 / GPRS

Vertical

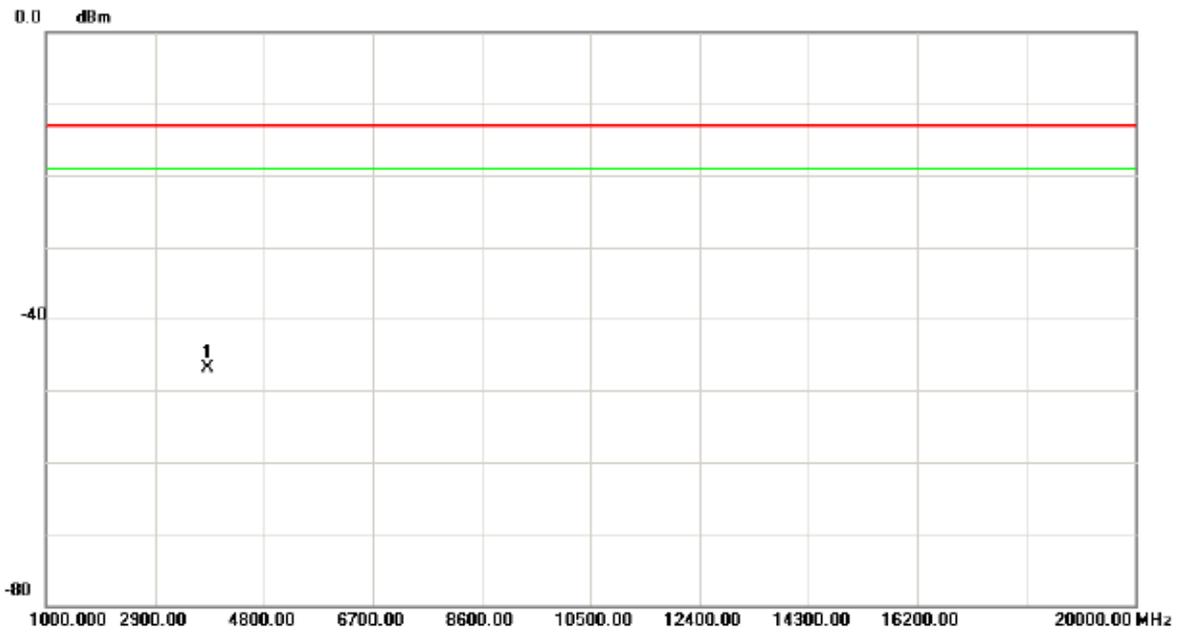


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3818.520	-67.48	20.60	-46.88	-13.0	-33.88	peak	



Test Mode : TX CH810 / GPRS

Horizontal

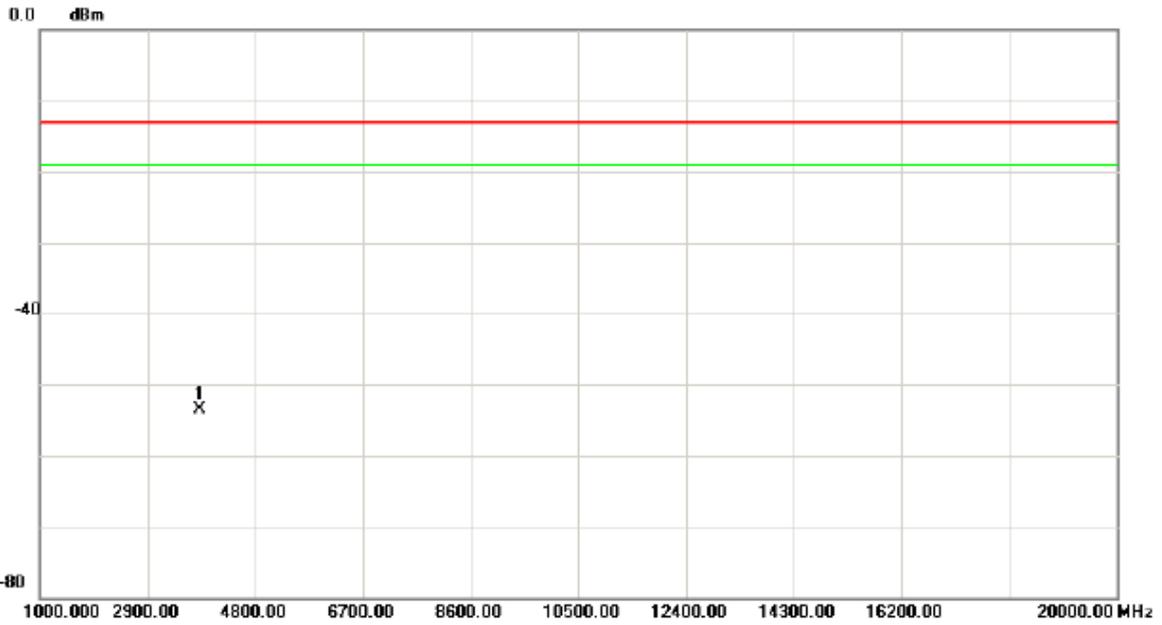


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3818.750	-69.56	16.04	-53.52	-13.0	-40.52	peak	



Test Mode : TXCH512 EDGE

Vertical

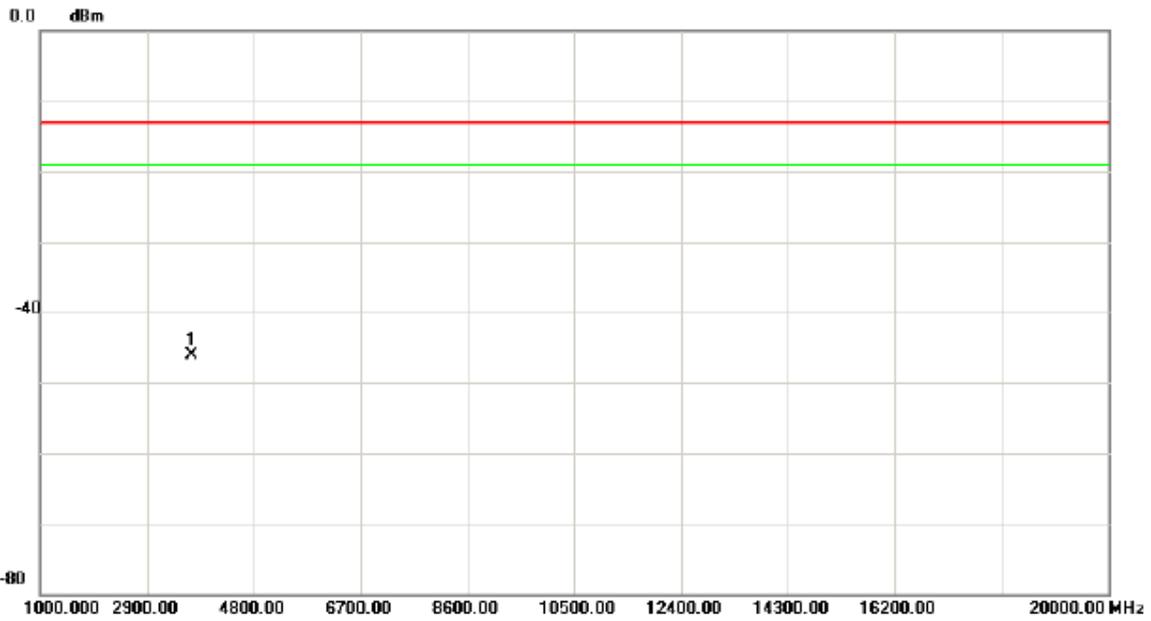


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	3700.130	-65.46	19.32	-46.14	-13.0	-33.14	peak	



Test Mode : TXCH512 EDGE

Horizontal

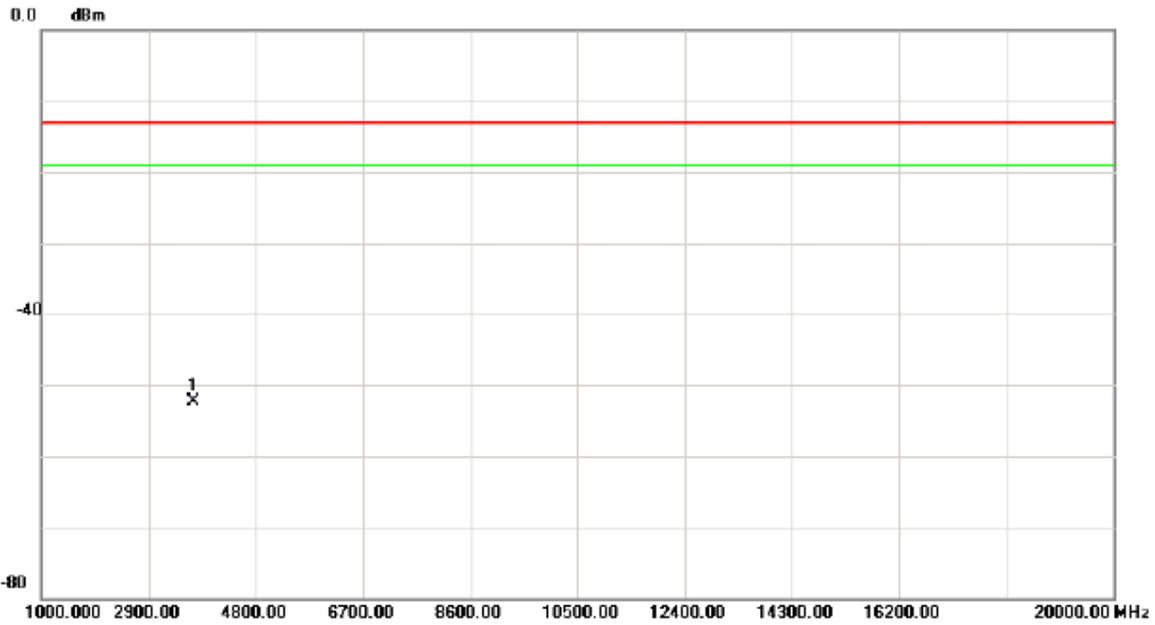


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	3700.250	-67.62	15.25	-52.37	-13.0	-39.37	peak	



Test Mode : TX CH661EDGE

Vertical

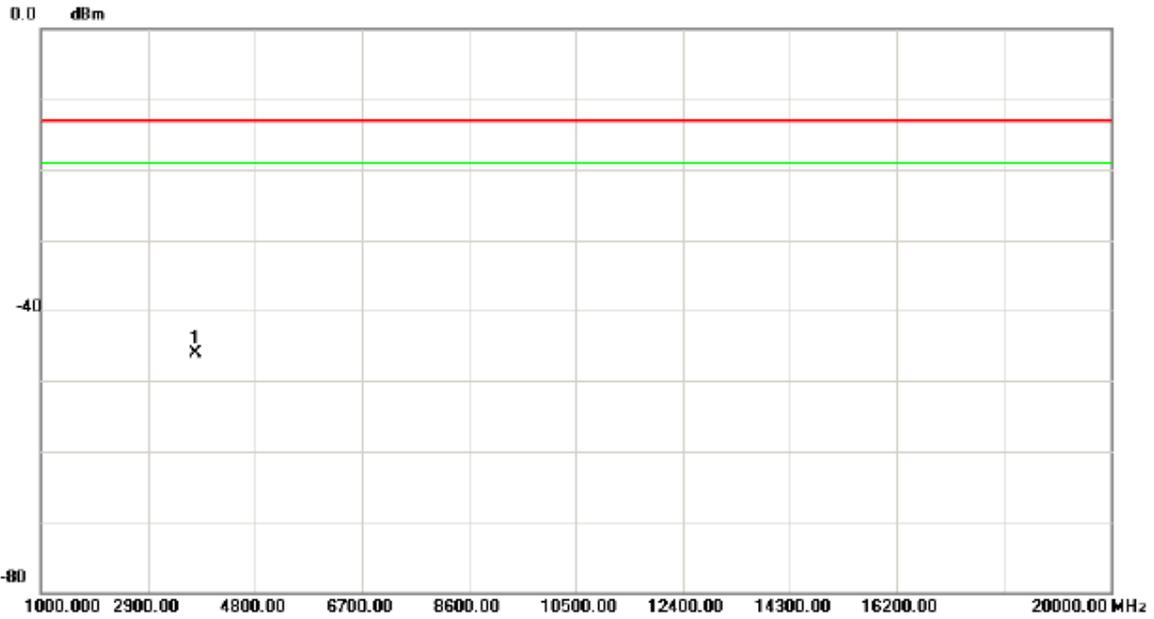


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3760.450	-66.11	19.97	-46.14	-13.0	-33.14	peak	



Test Mode : TX CH661EDGE


Horizontal

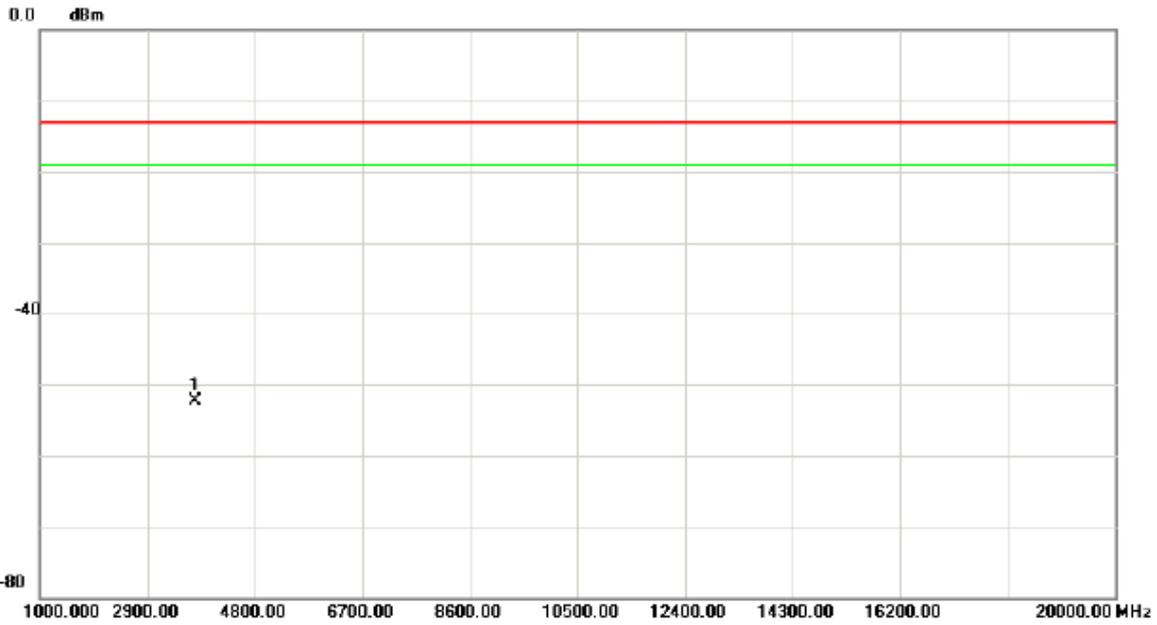

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	3760.520	-68.03	15.66	-52.37	-13.0	-39.37	peak	




Test Mode : TX CH810 EDGE

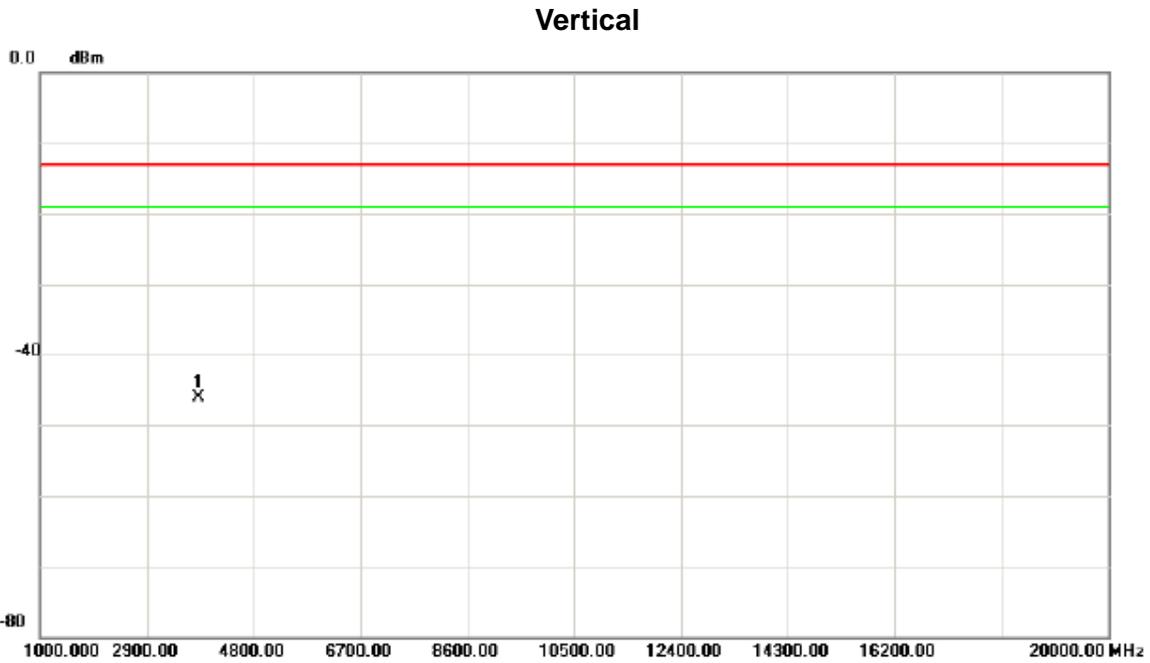

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	3819.670	-66.76	20.62	-46.14	-13.0	-33.14	peak	



Test Mode : TX CH810 EDGE

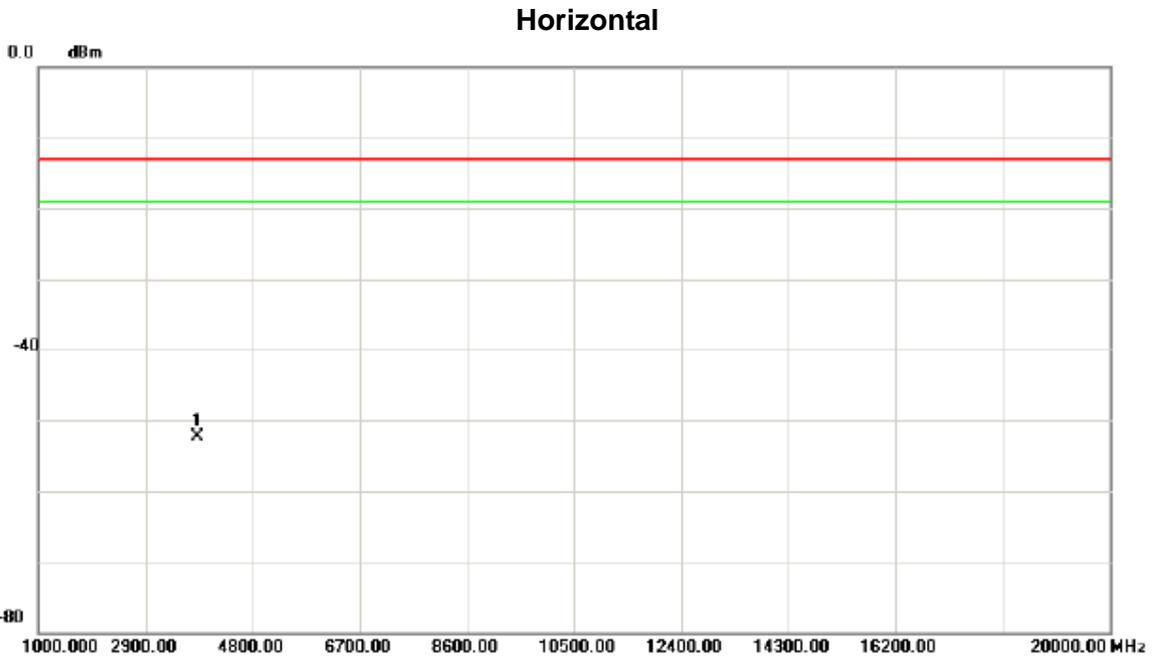


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	3819.430	-68.42	16.05	-52.37	-13.0	-39.37	peak	



ATTACHMENT E - BAND EDGE




Band Edge on Configuration GPRS / Channel 512-CONDUCTED MODE

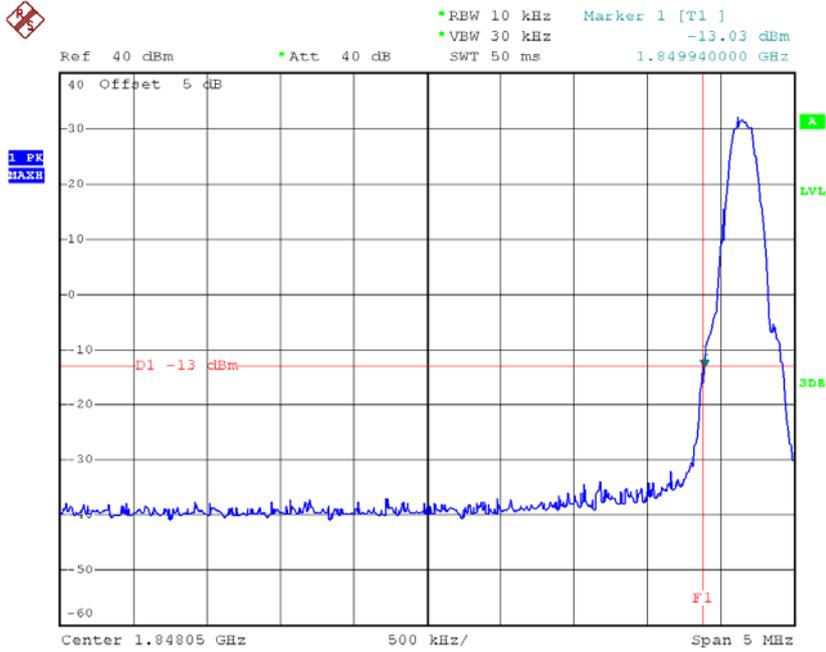

Date: 31.MAY.2014 16:54:46


Band Edge on Configuration GPRS / Channel 810-CONDUCTED MODE

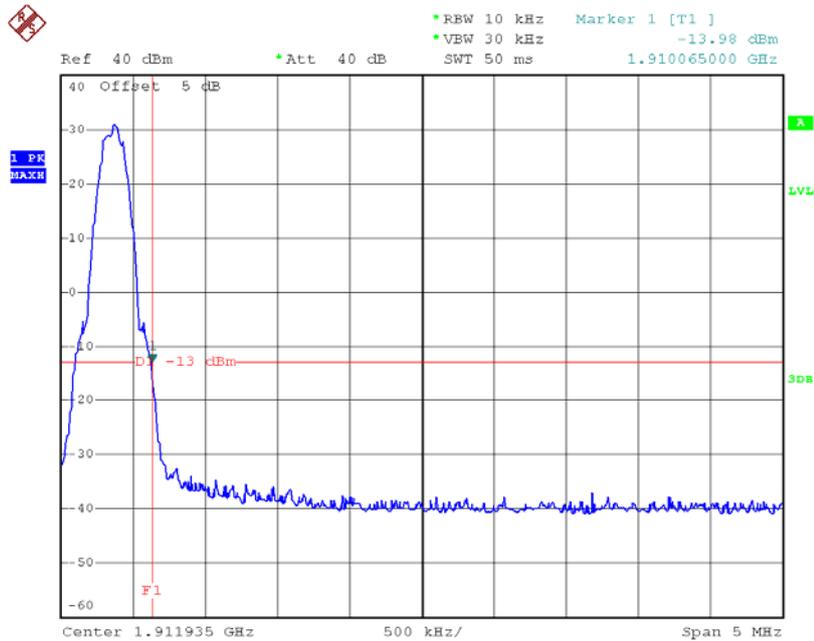

Date: 31.MAY.2014 16:52:21




Band Edge on Configuration EDGE / Channel 512-CONDUCTED MODE

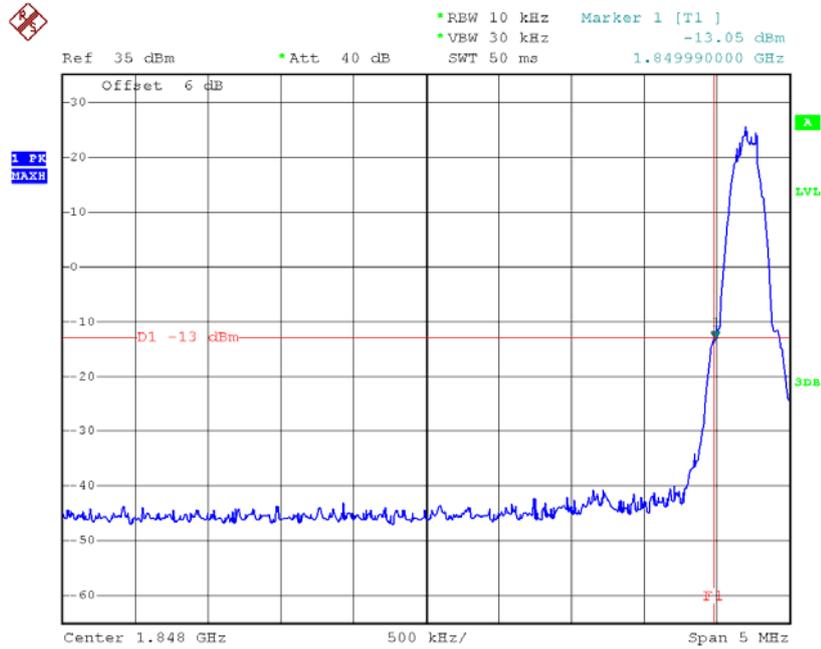

Date: 31.MAY.2014 15:43:18

Band Edge on Configuration EDGE / Channel 810-CONDUCTED MODE

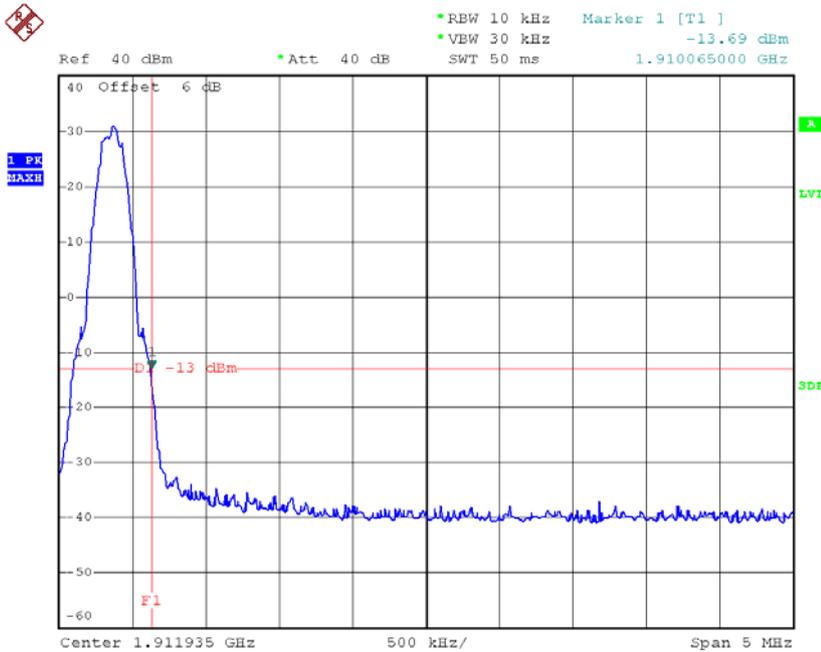

Date: 31.MAY.2014 15:54:40



ATTACHMENT F - FREQUENCY STABILITY



Test Mode : GPRS CH512

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.5	10	0.005404821	0.1
3.6	10	0.005404821	0.1
3.7	11	0.005945303	0.1
3.8	13	0.007026267	0.1
3.9	11	0.005945303	0.1
4.0	13	0.007026267	0.1
4.1	14	0.00756675	0.1
4.2	14	0.00756675	0.1
Max. Deviation (ppm)	14	0.00756675	0.1

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
45	15	0.008107232	0.1
30	17	0.009188196	0.1
20	16	0.008647714	0.1
10	17	0.009188196	0.1
0	15	0.008107232	0.1
Max. Deviation (ppm)	17	0.009188196	0.1



Test Mode : EDGE CH512

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.5	13	0.007026267	0.1
3.6	13	0.007026267	0.1
3.7	11	0.005945303	0.1
3.8	12	0.006485785	0.1
3.9	12	0.006485785	0.1
4.0	12	0.006485785	0.1
4.1	13	0.007026267	0.1
4.2	11	0.005945303	0.1
Max. Deviation (ppm)	13	0.007026267	0.1

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
45	16	0.008647714	0.1
30	18	0.009728678	0.1
20	18	0.009728678	0.1
10	15	0.008107232	0.1
0	14	0.00756675	0.1
Max. Deviation (ppm)	18	0.009728678	0.1




Neutron Engineering Inc.


ATTACHMENT G - PEAK TO AVERAGE RADIO



Peak to Average Ratio of Configuration- GPRS channel 512

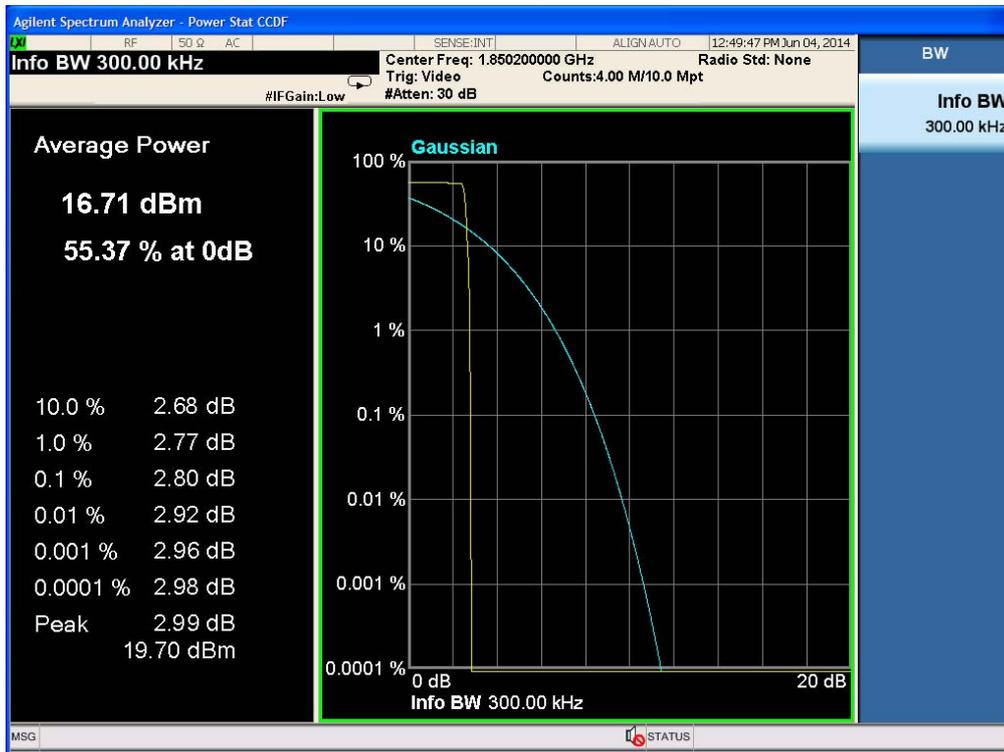


Peak to Average Ratio of Configuration- GPRS channel 661

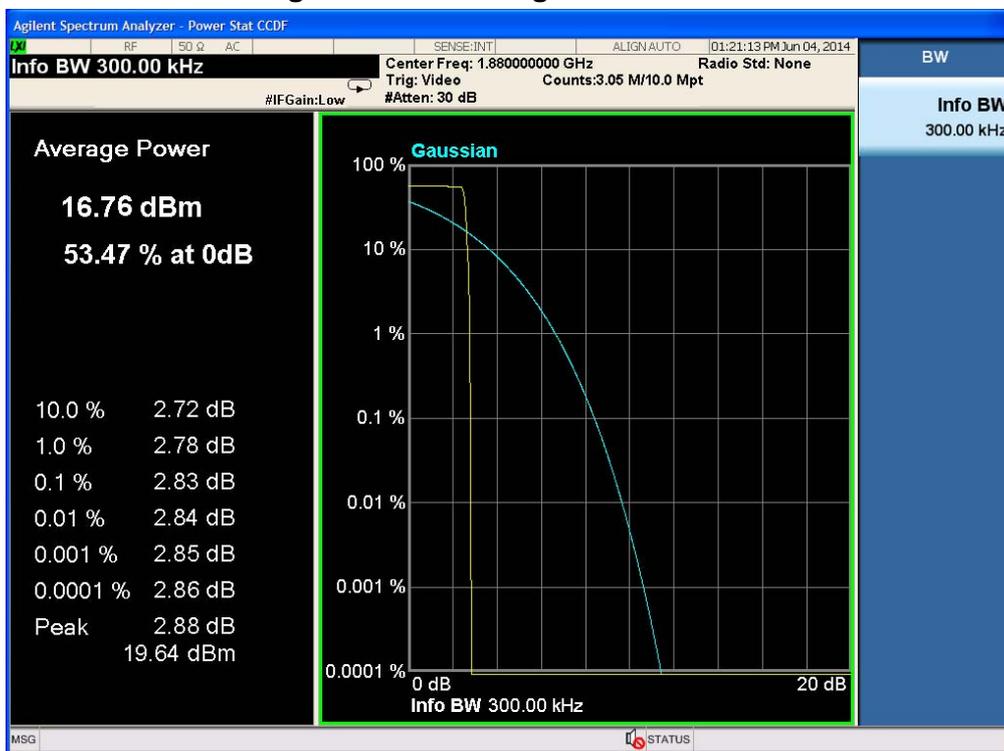




Peak to Average Ratio of Configuration- GPRS channel 810

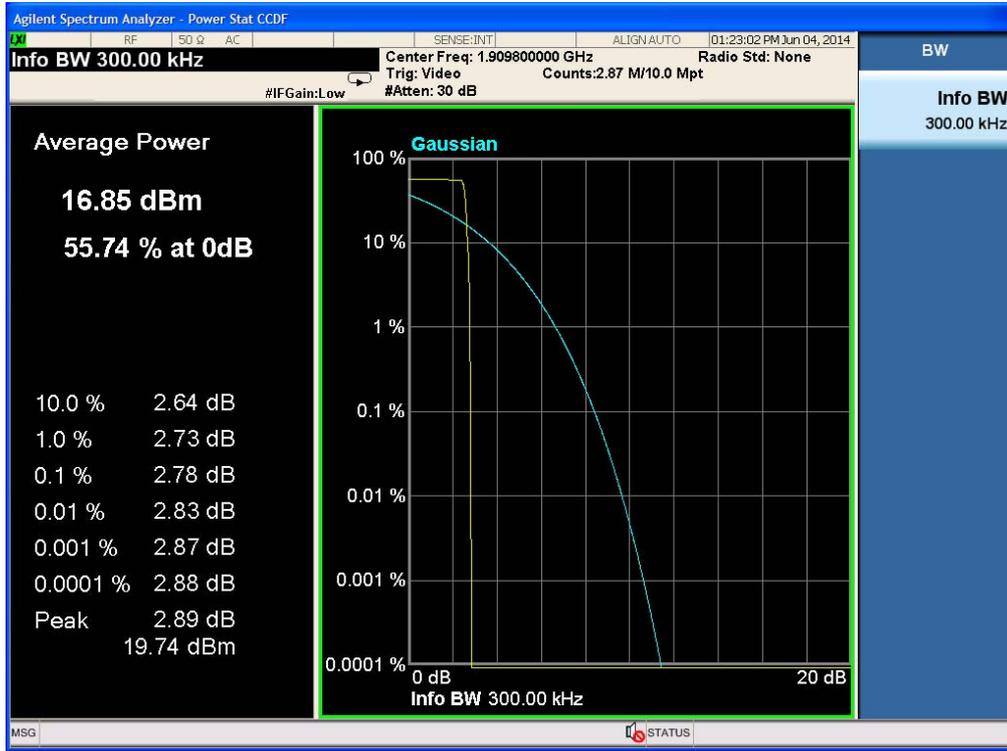




Peak to Average Ratio of Configuration- EDGE channel 512

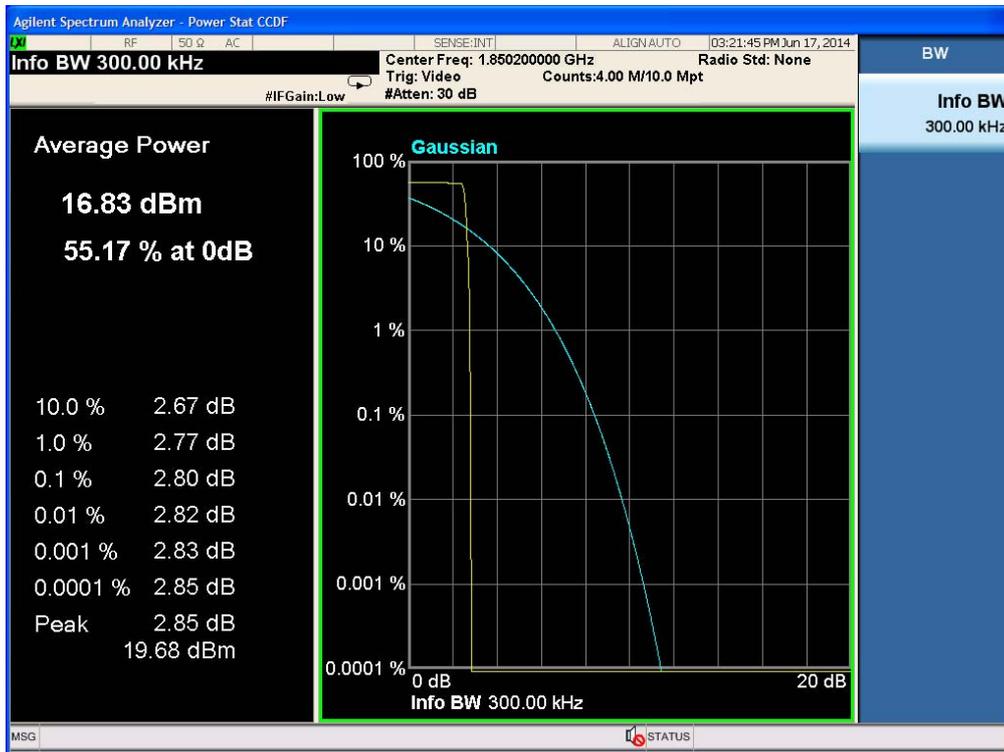


Peak to Average Ratio of Configuration- EDGE channel 661

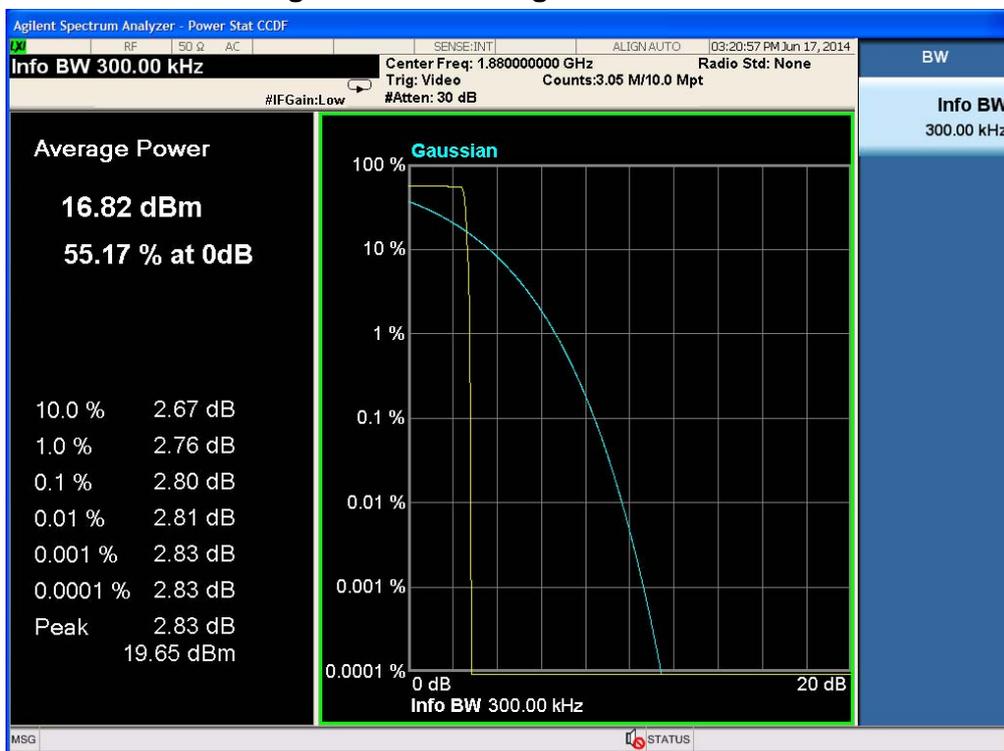



Peak to Average Ratio of Configuration- EDGE channel 810

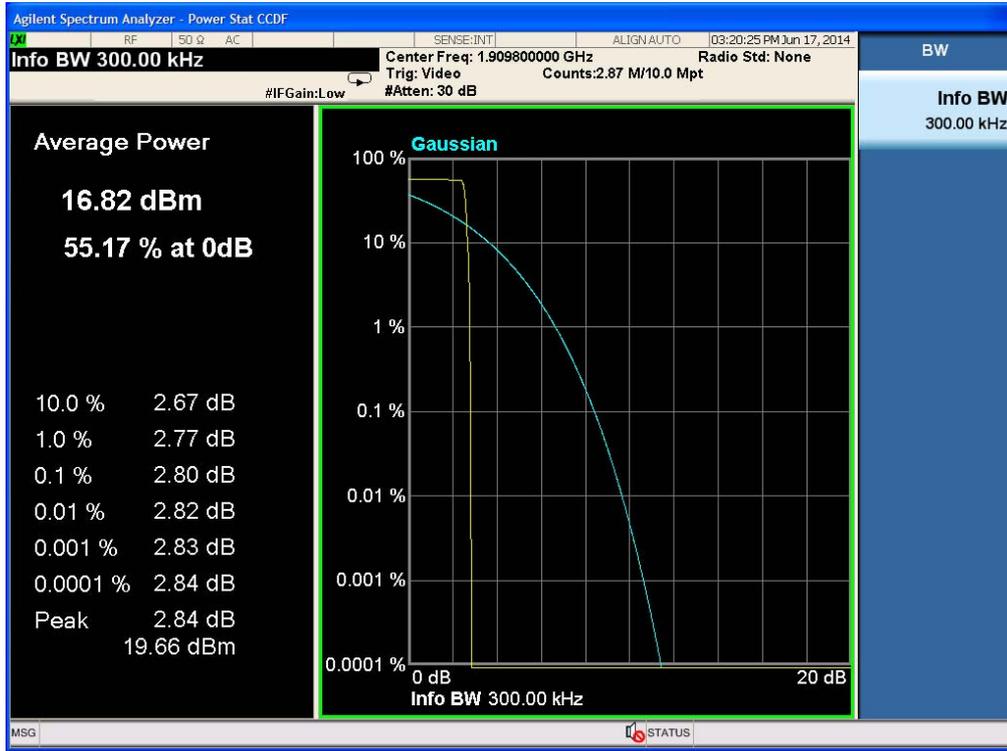




ATTACHMENT H - CONDUCTED EMISSION



Test Mode : TX Mode

Line

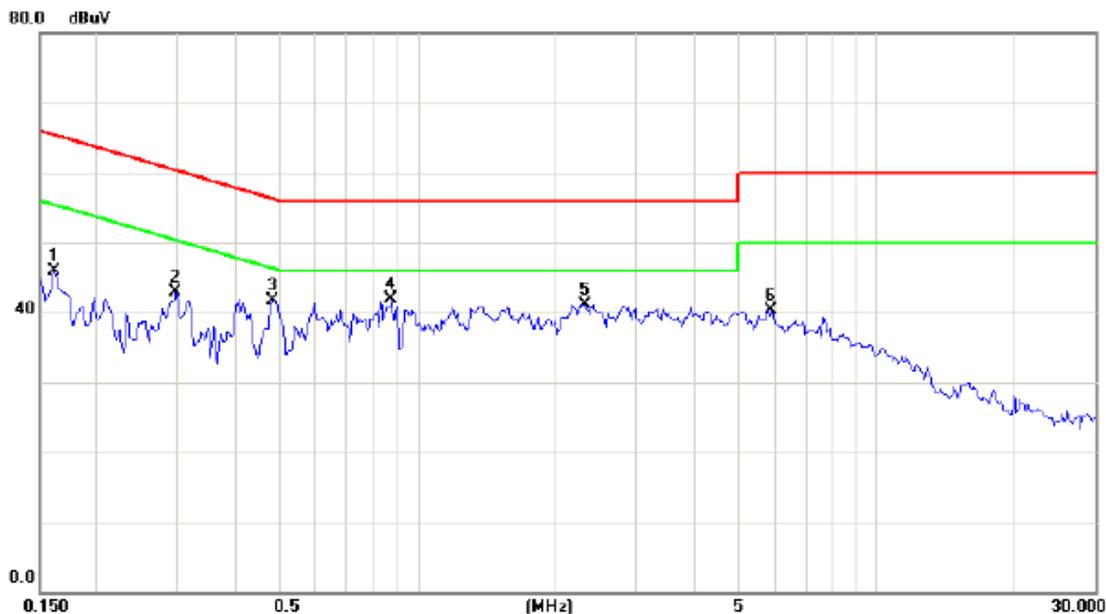


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1617	36.41	9.52	45.93	65.38	-19.45	peak	
2		0.2983	33.32	9.54	42.86	60.29	-17.43	peak	
3		0.4860	32.22	9.55	41.77	56.24	-14.47	peak	
4	*	0.8765	32.28	9.57	41.85	56.00	-14.15	peak	
5		2.3180	31.53	9.59	41.12	56.00	-14.88	peak	
6		5.9257	30.70	9.64	40.34	60.00	-19.66	peak	



Test Mode : TX Mode

Neutral

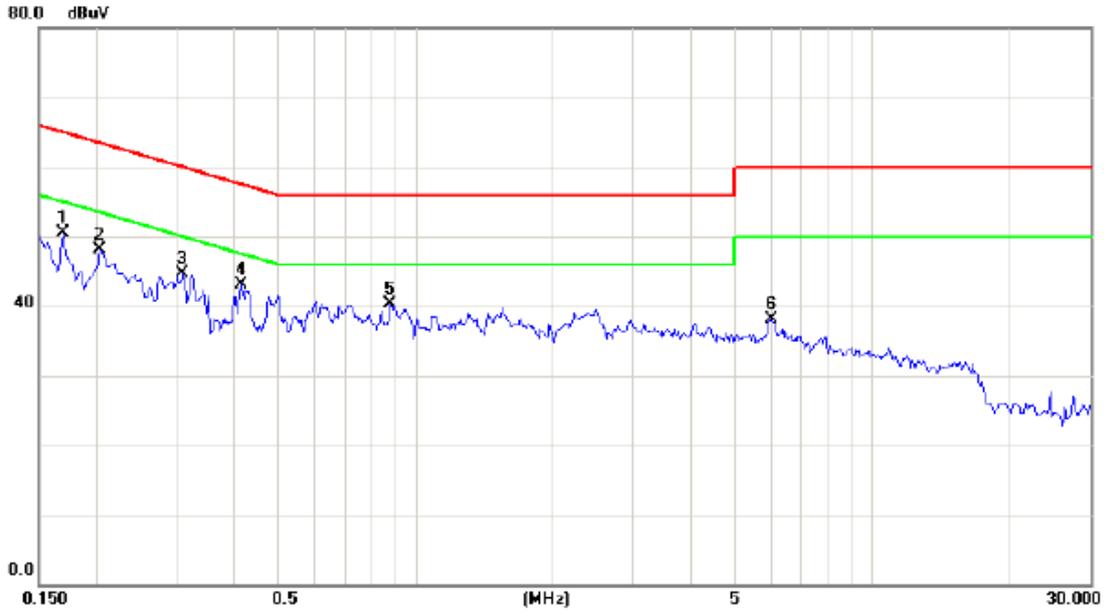

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1695	40.83	9.59	50.42	64.98	-14.56	peak	
2		0.2046	38.57	9.59	48.16	63.42	-15.26	peak	
3		0.3100	35.17	9.59	44.76	59.97	-15.21	peak	
4	*	0.4156	33.59	9.59	43.18	57.54	-14.36	peak	
5		0.8802	30.73	9.60	40.33	56.00	-15.67	peak	
6		5.9960	28.34	9.67	38.01	60.00	-21.99	peak	