



FCC SAR Compliance Test Report

Project Name: Mobile WiFi Smart

Model : E8278s-603

FCC ID : QISE8278S-603

Report No. : SYBH(Z-SAR) 015102013-2

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Alvinway</i>	<i>gongzhong</i>
DATE	2013-11-22	2013-11-22

The test results of this test report relate exclusively to the item(s) tested , The HUAWEI does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of HUAWEI.

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

Table of Contents

1	General Information	4
1.1	Statement of Compliance	4
1.2	RF exposure limits	5
1.3	EUT Description	6
1.3.1	General Description	7
1.4	Test specification(s)	8
1.5	Testing laboratory	8
1.6	Applicant and Manufacturer	8
1.7	Application details	8
1.8	Ambient Condition	8
2	SAR Measurement System	9
2.1	SAR Measurement Set-up	9
2.2	Test environment	10
2.3	Data Acquisition Electronics description	10
2.4	Probe description	11
2.5	Phantom description	12
2.6	Device holder description	12
2.7	Test Equipment List	13
3	SAR Measurement Procedure	14
3.1	Scanning procedure	14
3.2	Spatial Peak SAR Evaluation	15
3.3	Data Storage and Evaluation	16
4	System Verification Procedure	18
4.1	Tissue Verification	18
4.2	System Check	20
4.3	System check Procedure	21
5	Measurement Uncertainty Evaluation	22
6	SAR Test Configuration	24
6.1	GSM Test Configuration	24
6.2	UMTS Test Configuration	24
6.3	LTE Test Configurations	30
6.4	WiFi Test Configuration	31
7	SAR Measurement Results	32
7.1	Conducted power measurements	32
7.1.1	Conducted power measurements GSM850	33
7.1.2	Conducted power measurements GSM1900	34
7.1.3	Conducted power measurements UMTS Band V	35
7.1.4	Conducted power measurements UMTS Band II	36
7.1.5	Conducted power measurements LTE Band II	37
7.1.6	Conducted power measurements LTE Band IV	39
7.1.7	Conducted power measurements LTE Band V	41
7.1.8	Conducted power measurements WiFi	42
7.2	SAR measurement Result	43
7.2.1	SAR measurement Result of GSM850	43
7.2.2	SAR measurement Result of GSM1900	44
7.2.3	SAR measurement Result of UMTS Band V	45
7.2.4	SAR measurement Result of UMTS Band II	46
7.2.5	SAR measurement Result of LTE Band II	47
7.2.6	SAR measurement Result of LTE Band IV	48
7.2.7	SAR measurement Result of LTE Band V	49
7.2.8	SAR measurement Result of WiFi	50
7.3	Multiple Transmitter Evaluation	51
7.3.1	Stand-alone SAR test exclusion	52
7.3.2	Simultaneous Transmission Possibilities	52
7.3.3	SAR Summation Scenario	53
	Appendix A. System Check Plots	55
	Appendix B. SAR Measurement Plots	55
	Appendix C. Calibration Certificate	55
	Appendix D. Photo documentation	55

※ ※ Modified History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2013-11-22	GongZhong

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for E8278s-603 is as below Table 1.

Band	Position	MAX Reported 1-g SAR (W/kg)
GSM850	Body 5mm	1.163
GSM1900	Body 5mm	1.100
UMTS Band V	Body 5mm	0.771
UMTS Band II	Body 5mm	1.258
LTE Band II	Body 5mm	1.313
LTE Band IV	Body 5mm	1.316
LTE Band V	Body 5mm	0.961
WiFi	Body 5mm	0.389
The highest simultaneous SAR is 1.591W/kg per KDB690783 D01		

Table 1:Summary of test result

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C95.1:1992, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2003 & IEEE Std 1528a-2005.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

1.3 EUT Description

Device Information:			
DUT Name:	Mobile WiFi Smart		
Type Identification:	E8278s-603		
FCC ID:	QISE8278S-603		
SN No.:	D4G01A93A2600094		
Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Hardware Version :	CH1E8278SM		
Software Version :	21.261.71.01.00		
Antenna Type :	internal antenna		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band V/II, LTE Band II/IV/V,WiFi(tested)		
Test Modulation	GSM(GMSK/8PSK), UMTS(QPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band V	824-849	869-894
	UMTS Band II	1850-1910	1930-1990
	LTE Band II	1850-1910	1930-1990
	LTE Band IV	1710-1755	2110-2155
	LTE Band V	824-849	869-894
	WiFi	2437-2462	2437-2462
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category :	14		
HSUPA UE Category:	6		
DC-HSDPA UE Category:	24		
Power Class:	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
	3, tested with power control "all 1"(UMTS Band V)		
	3, tested with power control "all 1"(UMTS Band II)		
	3, tested with power control all Max.(LTE Band II)		
	3, tested with power control all Max.(LTE Band IV)		
	3, tested with power control all Max.(LTE Band V)		
Test Channels (low-mid-high):	128-190-251 (GSM850)		
	512-661-810 (GSM1900)		
	4132-4182-4233 (UMTS Band V)		
	9262-9400-9538 (UMTS Band II)		
	18625-18900-19175(LTE Band II BW=5MHz)		
	18650-18900-19150(LTE Band II BW=10MHz)		
	18675-18900-19125(LTE Band II BW=15MHz)		
	18700-18900-19100(LTE Band II BW=20MHz)		
	19975-20175-20375(LTE Band IV BW=5MHz)		
	20000-20175-20350(LTE Band IV BW=10MHz)		
	20025-20175-20325(LTE Band IV BW=15MHz)		
20050-20175-20300(LTE Band IV BW=20MHz)			

20425-20525-20625(LTE Band V BW=5MHz)
20450-20525-20600(LTE Band V BW=10MHz)
6-9-11 (WiFi)

Table 3:Device information and operating configuration

1.3.1 General Description

E8278s-603 LTE Wingle is subscriber equipment in the LTE/HSPA+/UMTS/EDGE/GPRS/GSM/WiFi system. LTE supports Band I、 II、 AWS、 V、 VIII、 XL, but only Band II、 AWS、 V testing dates included in this reports, DC-HSPA+/HSUPA/HSDPA/WCDMA supports Band I、 II、 V、 VIII, but only Band II、 V testing dates included in this report, EDGE/GPRS/GSM Supports GSM 850、 900、 1800、 1900,but only GSM 850 and 1900 testing dates included in this report.E8278s-603 implements such functions as RF signal receiving/transmitting, LTE/HSPA+/WCDMA and EDGE/GPRS/GSM/WiFi protocol processing, data service etc. Externally it provides USB interface (to connect to the notebook etc.), USIM card interface and Micro SD card interface. E8278s-603 has 2 internal antennas as default. E8278s-603 supports up to 10 users to connect to the wireless network at the same time so as to achieve the wireless LAN establishment.

1.4 Test specification(s)

ANSI Std C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a-2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 4 of March 2010)
KDB941225 D01	SAR test for 3G devices v02
KDB941225 D02	HSPA and 1x Advanced v02r02
KDB941225 D03	SAR Test Reduction GSM GPRS EDGE v01
KDB941225 D05	SAR for LTE Devices v02r02
KDB248227 D01	SAR meas for 802.11 a/b/g v01r02
KDB447498 D01	General RF Exposure Guidance v05r01
KDB447498 D02	SAR Procedures for Dongle Xmtr v02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r01
KDB865664 D02	SAR Reporting v01r01

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Zone K3,Huawei Industrial Base, Bantian Industry Area, Longgang District, Shenzhen, Guangdong, China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2013-11-02
End Date of test	2013-11-19

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

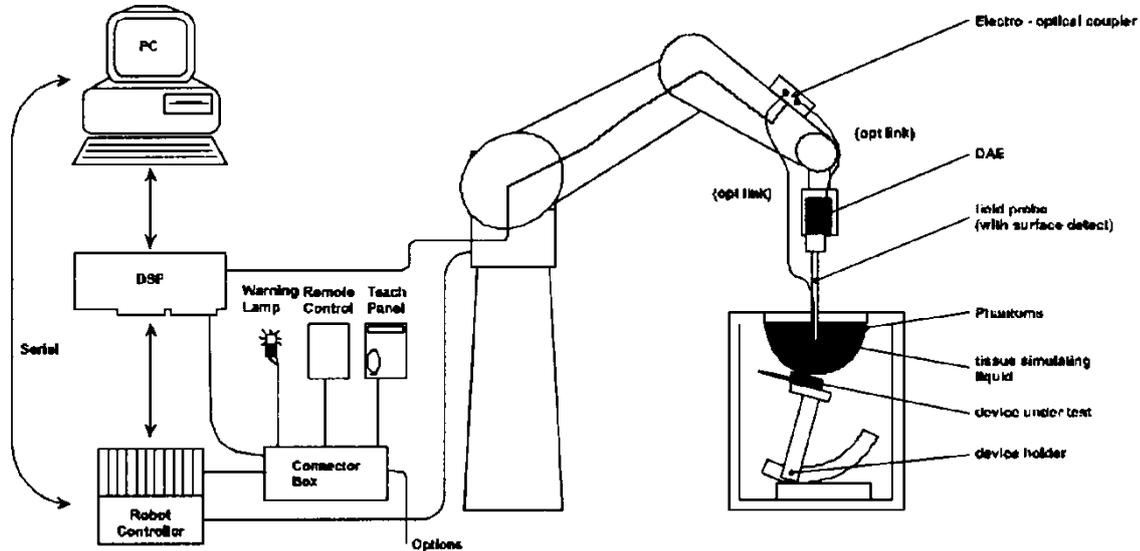

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows XP.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY5 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

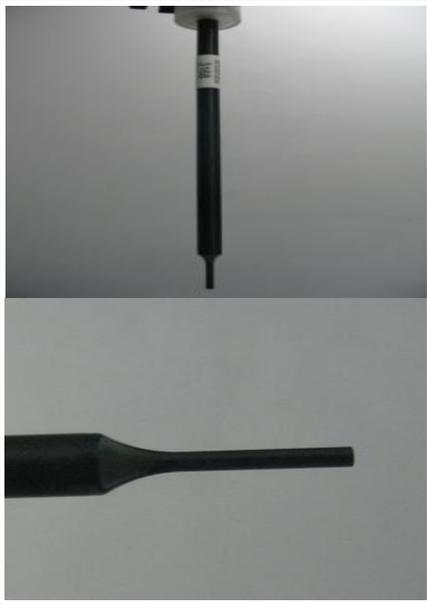Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm +/- 0.2 mm; The ear region: 6mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

ELI4 Phantom

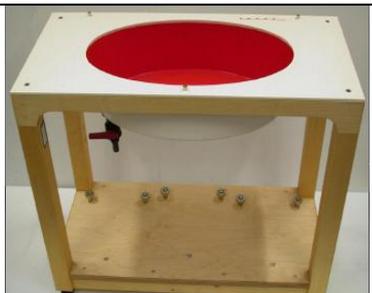Shell Thickness	2mm +/- 0.2 mm	
Filling Volume	Approximately 30 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment
Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration)*	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2013-05-10	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3744	2013-07-26	One year
<input type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2013-09-30	One year
<input checked="" type="checkbox"/>	SPEAG	835 MHz Dipole	D835V2	4d059	2013-05-02	Three years
<input checked="" type="checkbox"/>	SPEAG	1800 MHz Dipole	D1800V2	2d184	2011-03-08	Three years
<input checked="" type="checkbox"/>	SPEAG	1900 MHz Dipole	D1900V2	5d143	2011-09-26	Three years
<input type="checkbox"/>	SPEAG	2000 MHz Dipole	D2000V2	1052	2011-03-10	Three years
<input type="checkbox"/>	SPEAG	2300 MHz Dipole	D2300V2	1016	2011-11-22	Three years
<input checked="" type="checkbox"/>	SPEAG	2450 MHz Dipole	D2450V2	761	2013-09-12	Three years
<input type="checkbox"/>	SPEAG	2600 MHz Dipole	D2600V2	1021	2011-11-22	Three years
<input type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	852	2012-11-22	One year
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	851	2013-07-31	One year
<input type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	1236	2012-11-23	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	N/A	N/A
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	N/A	N/A
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	N/A	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	N/A	N/A
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	N/A	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1038	N/A	N/A
<input type="checkbox"/>	SPEAG	Flat Phantom	ELI 4.0	TP-1111	N/A	N/A
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2013-06-08	One year
<input checked="" type="checkbox"/>	R & S	WideBand Radio Communication Tester	CMW 500	126855	2013-08-10	Two years
<input checked="" type="checkbox"/>	Agilent)*	Network Analyser	E5071B	MY42404956	2013-02-27	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	N/A	N/A
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2013-02-27	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA0746001	N/A	N/A
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	311190	2013-05-13	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	MY44420359	2013-08-28	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	100740	2013-08-28	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY45101339	2013-02-26	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY44420359	2013-02-26	One year

Note: All the test equipments are calibrated once a year, except the dipoles, which are calibrated every three years. Moreover, we have self-calibration every year to the dipoles.

1) Per KDB865664 requirements for dipole calibration, Huawei SAR lab has adopted three years calibration interval. But each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}} \leq 2\text{GHz} \leq 8 \text{ mm}$, 2-4GHz - $\leq 5 \text{ mm}$ and 4-6 GHz- $\leq 4 \text{ mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5 \text{ mm}$, 3-4 GHz- $\leq 4 \text{ mm}$ and 4-6GHz- $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a ₁₀ , a ₁₁ , a ₁₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp _i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$
H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

- with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
[mV/(V/m)²] for E-field Probes
ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

- with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

- with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Body Tissue					
	450	835	1800	1900	2450	2600
Frequency Band (MHz)	450	835	1800	1900	2450	2600
Water	51.16	52.4	69.91	69.91	73.2	64.493
Salt (NaCl)	1.49	1.40	0.13	0.13	0.04	0.024
Sugar	46.78	45.0	0.0	0.0	0.0	0.0
HEC	0.52	1.0	0.0	0.0	0.0	0.0
Bactericide	0.05	0.1	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	53.93	0.958	21.4°C	2013-11-03
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	53.75	0.966		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	53.58	0.982		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	52.89	0.926	21.4°C	2013-11-12
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	52.76	0.943		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	52.50	0.952		
1800B	1710	53.5 (50.83~56.18)	1.46 (1.39~1.53)	51.48	1.466	21.4°C	2013-11-12
	1730	53.5 (50.83~56.18)	1.48 (1.41~1.55)	51.33	1.476		
	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	51.40	1.493		
	1800	53.3 (50.64~55.97)	1.52 (1.44~1.60)	51.07	1.539		
1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.74	1.494	21.4°C	2013-11-02
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.82	1.523		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.64	1.555		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.67	1.550		

1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.32	1.527	21.4°C	2013-11-18
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.48	1.553		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.34	1.565		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.32	1.591		
2450B	2410	52.80 (50.16~55.44)	1.91 (1.81~2.00)	50.69	1.960	21.4°C	2013-11-19
	2435	52.70 (50.07~55.34)	1.94 (1.84~2.04)	50.62	1.996		
	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	50.62	2.004		
	2460	52.70 (50.07~55.34)	1.96 (1.86~2.06)	50.67	2.023		
ϵ_r = Relative permittivity, σ = Conductivity							

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4) For UMTS measurements in band IV, and for 1800 MHz system verification the same TSL and 1750 MHz SAR probe calibration point have been used.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests (Graphic Plot(s) see Appendix A).


System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
D835V2 Body	9.54 (8.59~10.49)	6.29 (5.66~6.92)	9.60	6.32	21.4°C	2013-11-03
D835V2 Body	9.54 (8.59~10.49)	6.29 (5.66~6.92)	9.68	6.36	21.4°C	2013-11-12
D1800V2 Body	38.8 (34.92~42.68)	20.4 (18.36~22.44)	39.76	20.24	21.4°C	2013-11-12
D1900V2 Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	44.00	22.68	21.4°C	2013-11-02
D1900V2 Body	41.40 (37.26~45.54)	21.80 (19.62~23.98)	44.00	22.76	21.4°C	2013-11-18
D2450V2 Body	50.1 (45.09~55.11)	23.3 (20.97~25.63)	52.80	24.24	21.4°C	2013-11-19

Table 6: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

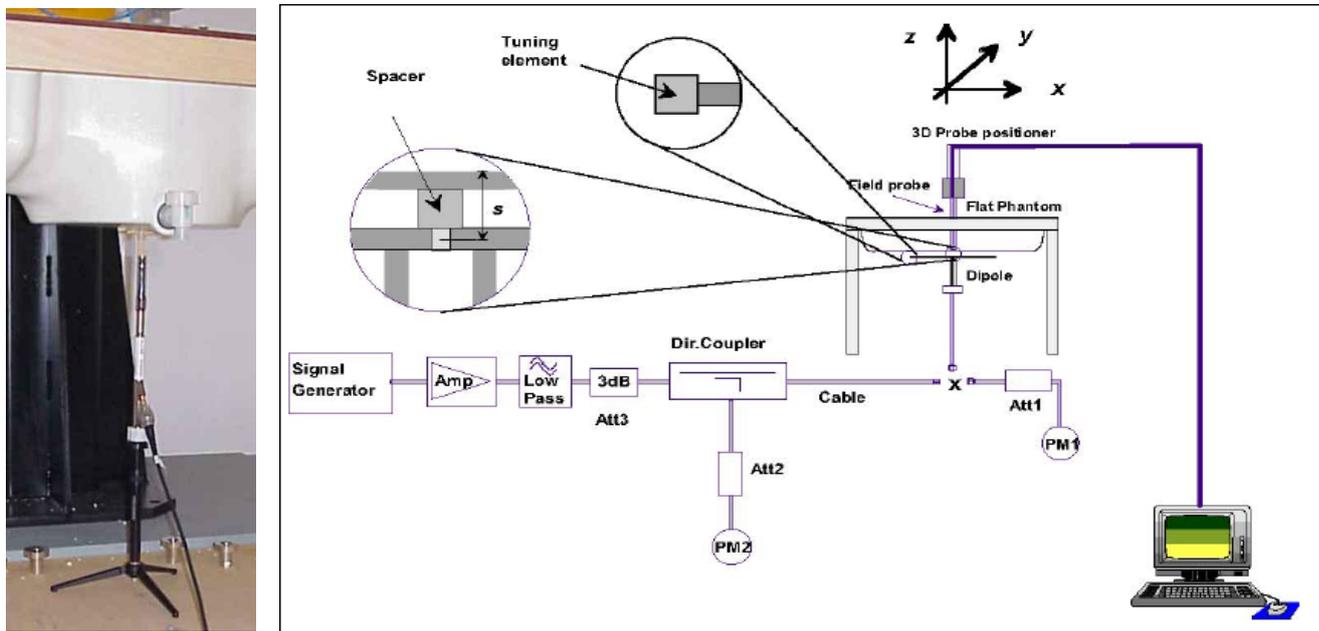

5 Measurement Uncertainty Evaluation

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Uncertainty component	Clause	Tol. (± %)	Prob. Dist.	Divisor	c_i (1-g)	c_i (10-g)	1 g ui (± %)	10 g ui (± %)	v_i^2 or v_{eff}
Measurement System									
Probe calibration	E.2.1	6.0%	N	1	1	1	6.00%	6.00%	∞
Axial isotropy	E.2.2	4.7%	R	√3	0.7	0.7	1.9%	1.9%	∞
Hemispherical isotropy	E.2.2	9.6%	R	√3	0.7	0.7	3.9%	3.9%	∞
Boundary effects	E.2.3	1.0%	R	√3	1	1	0.6%	0.6%	∞
Probe linearity	E.2.4	4.7%	R	√3	1	1	2.7%	2.7%	∞
System Detection limits	E.2.5	1.0%	R	√3	1	1	0.6%	0.6%	∞
Readout Electronics	E.2.6	0.3%	N	1	1	1	0.3%	0.3%	∞
Response time	E.2.7	0.8%	R	√3	1	1	0.5%	0.5%	∞
Integration time	E.2.8	2.6%	R	√3	1	1	1.5%	1.5%	∞
RF ambient conditions—noise	E.6.1	3.0%	R	√3	1	1	1.7%	1.7%	∞
RF ambient conditions—reflections	E.6.1	3.0%	R	√3	1	1	1.7%	1.7%	∞
Probe positioned	E.6.2	0.4%	R	√3	1	1	0.2%	0.2%	∞
Probe positioning	E.6.3	2.9%	N	√3	1	1	1.7%	1.7%	∞
Max. SAR evaluation	E.5.2	1.0%	N	√3	1	1	0.6%	0.6%	∞
Test Sample Related									
Device positioning	E.4.2	1.9%	N	1	1	1	1.9%	1.9%	71
Device holder	E.4.1	3.6%	N	1	1	1	3.6%	3.6%	∞
Power drift	6.6.2	5.0%	R	√3	1	1	2.9%	2.9%	∞
Phantom and Set-up									
Phantom uncertainty	E.3.1	4.0%	R	√3	1	1	2.3%	2.3%	∞
Liquid conductivity (target)	E.3.2	5.0%	R	√3	0.64	0.43	1.8%	1.2%	∞
Liquid conductivity (meas.)	E.3.3	4.2%	N	1	0.64	0.43	2.7%	1.8%	9
Liquid permittivity (target)	E.3.2	5.0%	R	√3	0.6	0.49	1.7%	1.4%	∞
Liquid permittivity (meas.)	E.3.3	4.2%	N	1	0.6	0.49	2.5%	2.1%	9
Combined Uncertainty							11.2%	10.8%	/
Expanded Std. Uncertainty (K=2)							22.3%	21.5%	/

Table 7: Measurement uncertainties applicable for frequencies less than 3GHz

Uncertainty component	Clause	Tol. (± %)	Prob. Dist.	Divisor	c_i (1-g)	c_i (10-g)	1 g u_i (± %)	10 g u_i (± %)	v_i^2 or v_{eff}
Measurement System									
Probe calibration	E.2.1	6.55%	N	1	1	1	6.55%	6.55%	∞
Axial isotropy	E.2.2	4.7%	R	√3	0.7	0.7	1.9%	1.9%	∞
Hemispherical isotropy	E.2.2	9.6%	R	√3	0.7	0.7	3.9%	3.9%	∞
Boundary effects	E.2.3	2.0%	R	√3	1	1	1.2%	1.2%	∞
Probe linearity	E.2.4	4.7%	R	√3	1	1	2.7%	2.7%	∞
System Detection limits	E.2.5	1.0%	R	√3	1	1	0.6%	0.6%	∞
Readout Electronics	E.2.6	0.3%	N	1	1	1	0.3%	0.3%	∞
Response time	E.2.7	0.8%	R	√3	1	1	0.5%	0.5%	∞
Integration time	E.2.8	2.6%	R	√3	1	1	1.5%	1.5%	∞
RF ambient conditions—noise	E.6.1	3.0%	R	√3	1	1	1.7%	1.7%	∞
RF ambient conditions—reflections	E.6.1	3.0%	R	√3	1	1	1.7%	1.7%	∞
Probe positioned	E.6.2	0.8%	R	√3	1	1	0.5%	0.5%	∞
Probe positioning	E.6.3	6.7%	N	√3	1	1	3.9%	3.9%	∞
Max. SAR evaluation	E.5.2	4.0%	N	√3	1	1	2.3%	2.3%	∞
Test Sample Related									
Device positioning	E.4.2	1.9%	N	1	1	1	1.9%	1.9%	71
Device holder	E.4.1	3.6%	N	1	1	1	3.6%	3.6%	∞
Power drift	6.6.2	5.0%	R	√3	1	1	2.9%	2.9%	∞
Phantom and Set-up									
Phantom uncertainty	E.3.1	4.0%	R	√3	1	1	2.3%	2.3%	∞
Liquid conductivity (target)	E.3.2	5.0%	R	√3	0.64	0.43	1.8%	1.2%	∞
Liquid conductivity (meas.)	E.3.3	4.2%	N	1	0.64	0.43	2.7%	1.8%	9
Liquid permittivity (target)	E.3.2	5.0%	R	√3	0.6	0.49	1.7%	1.4%	∞
Liquid permittivity (meas.)	E.3.3	4.2%	N	1	0.6	0.49	2.5%	2.1%	9
Combined Uncertainty							12.2%	11.9%	/
Expanded Std. Uncertainty (K=2)							24.5%	23.7%	/

Table 8:Measurement uncertainties applicable for frequencies up to 6GHz

6 SAR Test Configuration

6.1 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power lever is set to “5”and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

According to specification 3GPP TS 51.010, the maximum power of the GSM can do the power reduction for the multi-slot.

The allowed power reduction in the multi-slot configuration is as following:

Number of timeslots in uplink assignment		Reduction of maximum output power (dB)		
Band	Time Slots	GPRS (GMSK)	EGPRS (GMSK)	EGPRS (8PSK)
GSM850	1 TX slot	0	0	0
	2 TX slots	1	1	0.5
	3 TX slots	3	3	2.5
	4 TX slots	5	5	4.5
GSM1900	1 TX slot	0	0	0
	2 TX slots	1	1	1
	3 TX slots	3	3	3
	4 TX slots	5	5	5

Table 9: The allowed power reduction in the multi-slot configuration of GSM

6.2 UMTS Test Configuration

1) RMC

As the SAR body tests for UMTS Band V/II, we established the radio link through call processing. The maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

- 1) 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to ‘all 1’.
- 2) Test loop Mode 1.

For the output power, the configurations for the DPCCH and DPDCH₁ are as followed (EUT do not support the DPDCH_{2-n})

	Channel Bit Rate (kbps)	Channel Symbol Rate (ksps)	Spreading Factor	Spreading Code Number	Bits/Slot
DPCCH	15	15	256	0	10
DPDCH ₁	15	15	256	64	10
	30	30	128	32	20
	60	60	64	16	40
	120	120	32	8	80
	240	240	16	4	160
	480	480	8	2	320

	960	960	4	1	640
DPDCH _n	960	960	4	1, 2, 3	640

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits configured to all “1s”. SAR for other spreading codes and multiple DPDCH_n, when supported by the EUT, are not required when the maximum average outputs of each RF channel, for each spreading code and DPDCH_n configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC.

2) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. In addition, body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c/β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test ¹	β_c ²	β_d ²	β_d (SF) ²	β_c/β_d ²	β_{hs} (1) ²	CM(dB)(2) ²	MPR (dB) ²
1 ²	2/15 ²	15/15 ²	64 ²	2/15 ²	4/15 ²	0.0 ²	0 ²
2 ²	12/15(3) ²	15/15(3) ²	64 ²	12/15(3) ²	24/15 ²	1.0 ²	0 ²
3 ²	15/15 ²	8/15 ²	64 ²	15/8 ²	30/15 ²	1.5 ²	0.5 ²
4 ²	15/15 ²	4/15 ²	64 ²	15/4 ²	30/15 ²	1.5 ²	0.5 ²

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2 : CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.²
 Note 3 : For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ ²

Table 10: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 11: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 12:HSDPA UE category

3) HSUPA

Body SAR is also measured for HSDPA when the maximum average outputs of each RF channel with HSDPA active is at ¼ dB higher than that measured without HSDPA using 12.2kbps RMC or the maximum SAR 12.2kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-set 1 and QPSK for FRC and 12.2kbps RMC configured in Test Loop Mode 1 with power control algorithm 2, according to the highest body SAR configuration in 12.2 kbps RMC without HSPA.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the 'WCDMA Handset' and 'Release 5 HSDPA Data Device' sections of 3G device.

Sub-test [⊕]	β_c^{\oplus}	β_d^{\oplus}	β_d (SF) [⊕]	β_c/β_d^{\oplus}	$\beta_{hs}^{(1)\oplus}$	β_{ec}^{\oplus}	β_{ed}^{\oplus}	β_e ^{c⊕} (SF) [⊕]	β_{ed}^{\oplus} (code) [⊕]	CM ^{(2)⊕} (dB) [⊕]	MP R [⊕] (dB) [⊕]	AG ^{(4)⊕} Index [⊕]	E-TFC I [⊕]
1 [⊕]	11/15 ^{(3)⊕}	15/15 ^{(3)⊕}	64 [⊕]	11/15 ^{(3)⊕}	22/15 [⊕]	209/225 [⊕]	1039/225 [⊕]	4 [⊕]	1 [⊕]	1.0 [⊕]	0.0 [⊕]	20 [⊕]	75 [⊕]
2 [⊕]	6/15 [⊕]	15/15 [⊕]	64 [⊕]	6/15 [⊕]	12/15 [⊕]	12/15 [⊕]	94/75 [⊕]	4 [⊕]	1 [⊕]	3.0 [⊕]	2.0 [⊕]	12 [⊕]	67 [⊕]
3 [⊕]	15/15 [⊕]	9/15 [⊕]	64 [⊕]	15/9 [⊕]	30/15 [⊕]	30/15 [⊕]	$\beta_{ed1}:47/15^{\oplus}$ $\beta_{ed2}:47/15^{\oplus}$	4 [⊕]	2 [⊕]	2.0 [⊕]	1.0 [⊕]	15 [⊕]	92 [⊕]
4 [⊕]	2/15 [⊕]	15/15 [⊕]	64 [⊕]	2/15 [⊕]	4/15 [⊕]	2/15 [⊕]	56/75 [⊕]	4 [⊕]	1 [⊕]	3.0 [⊕]	2.0 [⊕]	17 [⊕]	71 [⊕]
5 [⊕]	15/15 ^{(4)⊕}	15/15 ^{(4)⊕}	64 [⊕]	15/15 ^{(4)⊕}	30/15 [⊕]	24/15 [⊕]	134/15 [⊕]	4 [⊕]	1 [⊕]	1.0 [⊕]	0.0 [⊕]	21 [⊕]	81 [⊕]

Note 1: $\Delta ACK, \Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c^{\oplus}$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.[⊕]
 Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15^{\oplus}$
 Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15^{\oplus}$
 Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.[⊕]
 Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.[⊕]

Table 13:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 14:HSUPA UE category

4) DC-HSDPA

In DC-HSDPA implementation of this device, the uplink parameters are the same as HSDPA. No additional channels and modulations (16 QAM, and 64 QAM) are supported in uplink. The difference is only in the downlink parameters, where two carriers are supported. HSDPA settings were used on uplink.

For Rel. 8 DC-HSDPA apply the four subtests from HSDPA Release 5 except use fixed reference channel H-Set 12 for DC-HSDPA. And we can apply the same SAR test exclusion criteria used for Rel. 6 HSPA for Rel. 7 HSPA+ and Rel. 8 DC-HSDPA. That is, if the HSPA, HSPA+, or the DC-HSDPA maximum output is not more than 0.25 dB higher than WCDMA, SAR measurement for those modes is not required.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/lor	dB	-10
P-CCPCH and SCH_Ec/lor	dB	-12
PICH_Ec/lor	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/lor	dB	-5
OCNS_Ec/lor	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 15: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

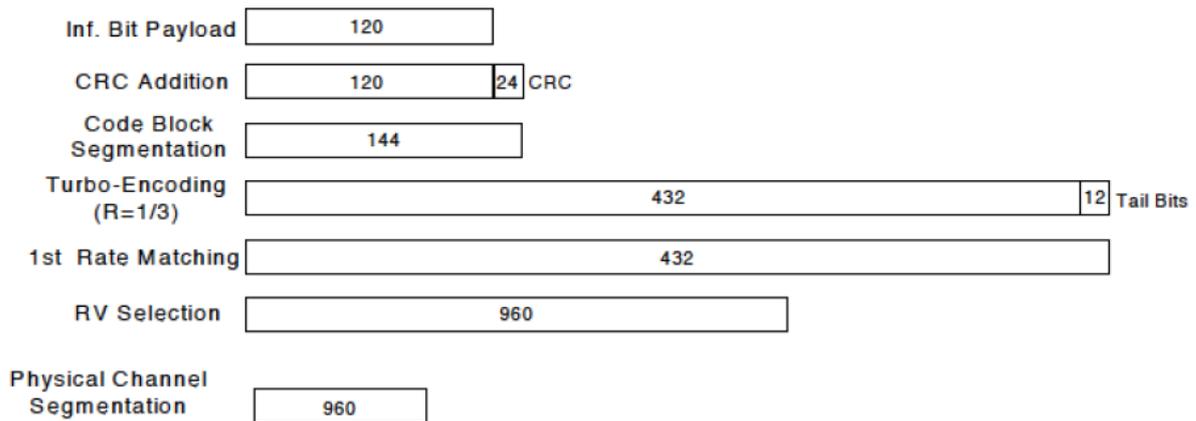


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	β_d (SF) ^o	β_c/β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 11/15$ and $\beta_d = 15/15$

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

6.3 LTE Test Configurations

SAR for LTE band exposure configurations is measured according to the Procedures of KDB941225 D05. The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed (see 3GPP standards) for the channel bandwidth and modulation combinations may be tested with MPR. Configurations with RB allocations below the required RB thresholds must be tested without MPR. A-MPR must always be disabled.

LTE Band II MPR as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	1	1	1	1	0
QPSK	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 8	> 12	> 16	> 18	1
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 8	> 12	> 16	> 18	1.5

LTE Band IV MPR as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]				MPR
	5	10	15	20	
	MHz	MHz	MHz	MHz	
QPSK	1	1	1	1	0
QPSK	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 8	> 12	> 16	> 18	1
16 QAM	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 8	> 12	> 16	> 18	1.5

LTE Band V MPR as below:

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]		MPR
	5	10	
	MHz	MHz	
QPSK	1	1	0
QPSK	≤8	≤ 12	0
QPSK	>8	> 12	1
16 QAM	≤8	≤ 12	1
16 QAM	>8	> 12	1.5

6.4 WiFi Test Configuration

For the 802.11b/g SAR tests, a communication link is set up with the test mode software for WiFi mode test. The Absolute Radio Frequency Channel Number(ARFCN) is allocated to 1 ,6 and 11 respectively in the case of 2450 MHz.During the test,at the each test frequency channel, the EUT is operated at the RF continuous emission mode. Each channel should be tested at the lowest data rate.

802.11b/g operating modes are tested independently according to the service requirements in each frequency band. 802.11b/g modes are tested on channel 1, 6, 11; however,if output power reduction is necessary for channels 1 and/or 11 to meet restricted band requirements the highest output channel closest to each of these channels must be tested instead.

SAR is not required for 802.11g/n channels when the maximum average output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels.

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1#	√	△
		2.437	6	√	△
		2.462	11#	√	△

Notes:

√ = "default test channels"

△ = possible 802.11g channels with maximum average output ¼ dB the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

802.11 Test Channels per FCC Requirements

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used.

SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements GSM850

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		128CH	190CH	251CH
GPRS (GMSK)	1 Tx Slot	32.14	32.18	32.13	-9.19	22.95	22.99	22.94
	2 Tx Slots	31.38	31.42	31.43	-6.13	25.25	25.29	25.30
	3 Tx Slots	29.44	29.46	29.36	-4.42	25.02	25.04	24.94
	4 Tx Slots	27.51	27.55	27.52	-3.18	24.33	24.37	24.34
EDGE (GMSK)	1 Tx Slot	32.10	32.17	32.11	-9.19	22.91	22.98	22.92
	2 Tx Slots	31.32	31.39	31.40	-6.13	25.19	25.26	25.27
	3 Tx Slots	29.46	29.38	29.39	-4.42	25.04	24.96	24.97
	4 Tx Slots	27.48	27.45	27.53	-3.18	24.30	24.27	24.35
EDGE (8PSK)	1 Tx Slot	25.46	25.46	25.43	-9.19	16.27	16.27	16.24
	2 Tx Slots	24.88	24.88	24.89	-6.13	18.75	18.75	18.76
	3 Tx Slots	22.82	22.81	22.82	-4.42	18.40	18.39	18.40
	4 Tx Slots	20.80	20.85	20.81	-3.18	17.62	17.67	17.63

Table 16:Test results conducted power measurement GSM850

Note: 1) The conducted power of GSM850 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) Per KDB 941225 D03v01,the bolded GPRS 2Ts slots mode was selected for SAR testing according to the highest frame –averaged output power table.

7.1.2 Conducted power measurements GSM1900

GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GPRS (GMSK)	1 Tx Slot	29.38	29.34	29.20	-9.19	20.19	20.15	20.01
	2 Tx Slots	28.46	28.48	28.29	-6.13	22.33	22.35	22.16
	3 Tx Slots	26.35	26.36	26.22	-4.42	21.93	21.94	21.80
	4 Tx Slots	24.36	24.38	24.26	-3.18	21.18	21.20	21.08
EDGE (GMSK)	1 Tx Slot	29.40	29.39	29.28	-9.19	20.21	20.20	20.09
	2 Tx Slots	28.46	28.44	28.39	-6.13	22.33	22.31	22.26
	3 Tx Slots	26.34	26.41	26.19	-4.42	21.92	21.99	21.77
	4 Tx Slots	24.39	24.35	24.35	-3.18	21.21	21.17	21.17
EDGE (8PSK)	1 Tx Slot	24.72	24.76	24.72	-9.19	15.53	15.57	15.53
	2 Tx Slots	24.12	24.26	24.14	-6.13	17.99	18.13	18.01
	3 Tx Slots	22.08	22.11	22.19	-4.42	17.66	17.69	17.77
	4 Tx Slots	19.95	20.06	20.03	-3.18	16.77	16.88	16.85

Table 17:Test results conducted power measurement GSM1900

Note: 1) The conducted power of GSM1900 is measured with RMS detector.

2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.

3) Per KDB 941225 D03v01,the bolded GPRS 2Ts slots mode was selected for SAR testing according to the highest frame –averaged output power table.

7.1.3 Conducted power measurements UMTS Band V

UMTS Band V		Conducted Power (dBm)		
		4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	22.30	22.26	22.23
	64kbps RMC	22.07	22.20	22.14
	144kbps RMC	22.05	22.18	22.10
	384kbps RMC	22.13	22.16	22.08
HSDPA	Subtest 1	22.16	22.17	22.13
	Subtest 2	22.14	22.09	22.05
	Subtest 3	21.53	21.60	21.64
	Subtest 4	21.72	21.74	21.70
HSUPA	Subtest 1	20.94	20.93	21.09
	Subtest 2	20.13	20.19	20.14
	Subtest 3	19.98	20.06	19.99
	Subtest 4	20.38	20.57	20.38
	Subtest 5	21.52	21.66	21.58
DC-HSDPA	Subtest 1	21.92	21.94	21.86
	Subtest 2	21.89	21.97	21.89
	Subtest 3	21.53	21.49	21.67
	Subtest 4	21.61	21.72	21.78

Table 18:Test results conducted power measurement UMTS Band V

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) Per KDB941225 D01v02, when maximum output of each RF channel with HSDPA/HSUPA active is $\leq \frac{1}{4}$ dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is $\leq 75\%$ of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.
- 3) Per KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPA active is $\leq \frac{1}{4}$ dB higher than that measured without HSPA+/DC-HSDPA using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC without HSPA+/DC-HSDPA is $\leq 75\%$ of the SAR limit, SAR evaluation for HSPA+/DC-HSDPA is not required.

7.1.4 Conducted power measurements UMTS Band II

UMTS Band II		Conducted Power (dBm)		
		9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	22.23	22.17	22.09
	64kbps RMC	21.99	22.02	21.87
	144kbps RMC	21.94	22.17	21.90
	384kbps RMC	21.93	22.05	21.87
HSDPA	Subtest 1	22.10	22.15	21.96
	Subtest 2	21.99	21.97	21.80
	Subtest 3	21.52	21.68	21.51
	Subtest 4	21.61	21.50	21.35
HSUPA	Subtest 1	21.36	20.90	20.59
	Subtest 2	19.42	20.07	19.68
	Subtest 3	20.47	20.42	19.80
	Subtest 4	20.49	20.31	20.04
	Subtest 5	21.31	21.42	20.76
DC-HSDPA	Subtest 1	21.95	21.91	21.79
	Subtest 2	21.88	21.92	21.68
	Subtest 3	21.52	21.63	21.42
	Subtest 4	21.49	21.39	21.29

Table 19:Test results conducted power measurement UMTS Band II

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) Per KDB941225 D01v02, when maximum output of each RF channel with HSDPA/HSUPA active is \leq ¼ dB higher than without HSDPA/HSUPA using 12.2 kbps RMC and maximum SAR for 12.2 kbps RMC is \leq 75% of SAR limit, SAR evaluation for HSDPA/HSUPA is not required.
- 3) Per KDB941225 D02v02r02, when the maximum average output power of each RF channel with (uplink) HSPA+/DC-HSDPA active is \leq ¼ dB higher than that measured without HSPA+/DC-HSDPA using 12.2 kbps RMC, or the maximum reported SAR for 12.2 kbps RMC without HSPA+/DC-HSDPA/ is \leq 75% of the SAR limit, SAR evaluation for HSPA+/DC-HSDPA is not required.

7.1.5 Conducted power measurements LTE Band II

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18625	18900	19175
5MHz	QPSK	1	0	21.81	21.75	21.99
		1	13	22.08	22.02	22.19
		1	24	22.31	22.37	22.47
		12	0	20.60	21.05	21.23
		12	6	20.67	21.20	21.39
		12	13	20.54	21.07	21.18
		25	0	20.68	20.98	21.29
	16QAM	1	0	20.70	20.70	20.87
		1	13	21.02	21.15	21.06
		1	24	21.34	21.55	21.36
		12	0	20.25	20.37	20.46
		12	6	20.33	20.56	20.36
		12	13	20.18	20.42	20.19
		25	0	20.29	20.37	20.29
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18650	18900	19150
10MHz	QPSK	1	0	21.43	21.61	21.44
		1	25	22.22	22.20	22.20
		1	49	22.36	22.21	22.30
		25	0	20.71	20.75	20.98
		25	13	20.93	20.98	21.19
		25	25	20.68	20.69	20.82
		50	0	20.67	20.77	20.92
	16QAM	1	0	20.53	20.74	20.50
		1	25	21.36	21.33	21.32
		1	49	21.30	21.37	21.38
		25	0	20.09	20.04	20.45
		25	13	20.34	20.33	20.60
		25	25	20.06	20.07	20.20
		50	0	20.04	20.08	20.27

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18675	18900	19125
15MHz	QPSK	1	0	21.69	21.78	21.66
		1	38	22.28	22.17	22.25
		1	74	22.08	21.82	22.05
		36	0	20.85	21.00	20.94
		36	18	20.95	21.02	21.27
		36	39	20.93	20.78	21.06
		75	0	20.91	20.86	21.04
	16QAM	1	0	20.77	20.67	20.82
		1	38	21.41	21.17	21.44
		1	74	21.28	20.84	21.03
		36	0	20.37	20.41	20.45
		36	18	20.46	20.44	20.59
		36	39	20.44	20.24	20.35
		75	0	20.40	20.29	20.34
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				18700	18900	19100
20MHz	QPSK	1	0	21.53	21.96	21.38
		1	50	22.26	22.13	22.27
		1	99	22.19	21.63	21.80
		50	0	20.84	21.00	20.79
		50	25	21.05	21.01	21.00
		50	50	21.02	20.75	21.03
		100	0	20.87	20.87	20.98
	16QAM	1	0	20.75	20.87	20.43
		1	50	21.29	21.36	21.26
		1	99	21.09	20.66	20.90
		50	0	20.19	20.36	20.33
		50	25	20.38	20.40	20.50
		50	50	20.42	20.17	20.38
		100	0	20.25	20.25	20.30

Table 20:Test results conducted power measurement LTE Band II

Note: The conducted power of LTE Band II is measured with RMS detector.

7.1.6 Conducted power measurements LTE Band IV

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				19975	20175	20375
5MHz	QPSK	1	0	21.82	21.85	22.04
		1	13	22.36	22.22	22.38
		1	24	22.68	22.40	22.61
		12	0	21.17	21.10	21.27
		12	6	21.41	21.13	21.42
		12	13	21.38	21.02	21.35
		25	0	21.29	21.11	21.29
	16QAM	1	0	20.98	20.82	21.08
		1	13	21.58	21.20	21.48
		1	24	21.93	21.35	21.66
		12	0	20.96	20.70	20.72
		12	6	21.09	20.72	20.85
		12	13	20.92	20.62	20.75
		25	0	20.84	20.75	20.69
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20000	20175	20350
10MHz	QPSK	1	0	21.60	21.77	21.51
		1	25	22.50	22.33	22.53
		1	49	22.75	22.35	22.58
		25	0	21.21	20.93	20.94
		25	13	21.30	21.09	21.27
		25	25	21.26	20.91	21.00
		50	0	21.28	20.84	20.82
	16QAM	1	0	20.94	20.93	20.94
		1	25	21.90	21.56	21.74
		1	49	21.88	21.58	21.77
		25	0	20.72	20.44	20.58
		25	13	20.98	20.75	20.77
		25	25	20.76	20.47	20.49
		50	0	20.80	20.48	20.40

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20025	20175	20325
15MHz	QPSK	1	0	21.81	22.08	21.76
		1	38	22.60	22.32	22.43
		1	74	22.41	21.99	22.29
		36	0	21.30	21.22	20.93
		36	18	21.22	21.13	21.16
		36	39	21.16	21.09	21.18
		75	0	21.34	21.13	21.01
	16QAM	1	0	21.12	21.24	21.00
		1	38	21.90	21.44	21.59
		1	74	21.54	21.24	21.40
		36	0	20.79	20.79	20.60
		36	18	20.97	20.86	20.82
		36	39	20.91	20.59	20.70
		75	0	20.98	20.75	20.58
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20050	20175	20300
20MHz	QPSK	1	0	21.99	22.12	21.78
		1	50	22.51	22.30	22.33
		1	99	22.28	21.97	22.41
		50	0	21.25	21.14	20.88
		50	25	21.32	21.06	20.96
		50	50	21.27	20.99	21.06
		100	0	21.27	21.15	20.97
	16QAM	1	0	21.24	21.28	20.98
		1	50	21.71	21.56	21.75
		1	99	21.45	21.33	21.61
		50	0	20.85	20.59	20.54
		50	25	20.89	20.70	20.66
		50	50	20.72	20.55	20.75
		100	0	20.88	20.66	20.50

Table 21:Test results conducted power measurement LTE Band IV

Note:The conducted power of LTE Band IV is measured with RMS detector.

7.1.7 Conducted power measurements LTE Band V

Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20425	20525	20625
5MHz	QPSK	1	0	21.67	22.14	22.09
		1	13	22.57	22.17	22.44
		1	24	22.84	22.37	22.37
		12	0	21.16	21.11	21.28
		12	6	21.41	21.15	21.37
		12	13	21.40	21.03	21.14
		25	0	21.37	21.12	21.22
	16QAM	1	0	20.68	20.97	20.95
		1	13	21.44	21.14	21.44
		1	24	21.78	21.31	21.51
		12	0	20.57	20.33	20.68
		12	6	20.80	20.38	20.75
		12	13	20.75	20.23	20.51
		25	0	20.70	20.33	20.58
Bandwidth	Modulation	RB size	RB offset	Channel	Channel	Channel
				20450	20525	20600
10MHz	QPSK	1	0	21.49	21.87	21.50
		1	25	22.69	22.26	22.42
		1	49	22.27	22.13	22.12
		25	0	21.08	20.90	20.96
		25	13	21.49	21.00	21.24
		25	25	21.10	20.89	21.01
		50	0	21.21	20.96	20.97
	16QAM	1	0	20.92	20.89	20.68
		1	25	21.80	21.33	21.51
		1	49	21.55	21.44	21.34
		25	0	20.43	20.24	20.21
		25	13	20.68	20.31	20.63
		25	25	20.41	20.14	20.37
		50	0	20.43	20.16	20.31

Table 22:Test results conducted power measurement LTE Band V

Note:The conducted power of LTE Band V is measured with RMS detector.

7.1.8 Conducted power measurements WiFi

The output power of WiFi antenna is as following:

Wi-Fi 2450	Channel	Average Power (dBm) for Data Rates (Mbps)							
		1	2	5.5	11	/	/	/	/
802.11b	6	11.70	11.65	11.65	11.60	/	/	/	/
	9	12.99	12.89	12.86	12.79	/	/	/	/
	11	12.80	12.75	12.72	12.70	/	/	/	/
802.11g	Channel	6	9	12	18	24	36	48	54
	6	10.25	10.20	10.22	10.20	10.18	10.19	10.15	10.13
	9	11.36	11.32	11.30	11.28	11.25	11.22	11.20	11.18
	11	11.60	11.59	11.58	11.55	11.53	11.52	11.50	11.48
802.11n HT20	Channel	6.5	13	19.5	26	39	52	58.5	65
	6	8.22	8.07	8.09	8.05	8.03	8.04	8.01	7.98
	9	9.34	9.21	9.19	9.15	9.12	9.10	9.04	9.03
	11	9.23	9.02	8.99	8.98	9.01	8.98	8.99	8.96

Table 23:Test results conducted power measurement WiFi .

Note:

1. The Average conducted power of WiFi is measured with RMS detector.
2. Per KDB248227, for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate.

7.2 SAR measurement Result

- 1) Per KDB447498 D01v05,testing of other required channels within the operating mode of a frequency band is not required when the reported(Scaled) SAR for the middle channel or highest output power channels is $\leq 0.8\text{W/kg}$. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.
- 2) Per KDB865664 D01v01,for each frequency band,repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$; if the deviation among the repeated measurement is $\leq 20\%$,and the measured SAR $< 1.45\text{W/Kg}$,only one repeated measurement is required.
- 3) Per Lab PBA Tracking Number 230023: for the antennas of the project is less than 2.5cm from the USB connector, if the measured SAR level for the horizontal position is $< 1.2 \text{ W/Kg}$,testing at the additional position is optional.
- 4) All measurement SAR result is scaled-up to account for tune-up tolerance is compliant

7.2.1 SAR measurement Result of GSM850

Test Position of Body With 5 mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR _{1-g} (W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	251/848.8	GPRS 2TS	0.984	0.615	0.090	31.43	32.00	1.122	21.4°C
Front Side-repeated*	251/848.8	GPRS 2TS	1.020	0.640	0.100	31.43	32.00	1.163	21.4°C
Front Side	190/836.6	GPRS 2TS	0.884	0.553	-0.120	31.42	32.00	1.010	21.4°C
Front Side	128/824.2	GPRS 2TS	0.814	0.518	0.160	31.38	32.00	0.939	21.4°C
Back Side	251/848.8	GPRS 2TS	0.929	0.565	0.090	31.43	32.00	1.059	21.4°C
Back Side	190/836.6	GPRS 2TS	0.865	0.527	-0.040	31.42	32.00	0.989	21.4°C
Back Side	128/824.2	GPRS 2TS	0.807	0.495	0.150	31.38	32.00	0.931	21.4°C
Left Side	190/836.6	GPRS 2TS	0.536	0.336	0.010	31.42	32.00	0.613	21.4°C
Right Side	190/836.6	GPRS 2TS	0.197	0.129	-0.050	31.42	32.00	0.225	21.4°C
Tip Side	190/836.6	GPRS 2TS	0.013	0.010	0.160	31.42	32.00	0.015	21.4°C

Table 24:Test results Body SAR GSM850

Note:

- 1) * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.2 SAR measurement Result of GSM1900

Test Position of Body With 5 mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	661/1880	GPRS 2TS	0.707	0.376	0.110	28.48	29.00	0.797	21.4°C
Back Side	810/1909.8	GPRS 2TS	0.934	0.485	0.050	28.29	29.00	1.100	21.4°C
Back Side-repeated*	810/1909.8	GPRS 2TS	0.908	0.464	0.190	28.29	29.00	1.069	21.4°C
Back Side	661/1880	GPRS 2TS	0.785	0.410	-0.040	28.48	29.00	0.885	21.4°C
Back Side	512/1850.2	GPRS 2TS	0.868	0.476	-0.090	28.46	29.00	0.983	21.4°C
Left Side	661/1880	GPRS 2TS	0.682	0.378	-0.110	28.48	29.00	0.769	21.4°C
Right Side	661/1880	GPRS 2TS	0.080	0.031	-0.190	28.48	29.00	0.090	21.4°C
Tip Side	661/1880	GPRS 2TS	0.048	0.029	0.050	28.48	29.00	0.054	21.4°C

Table 25:Test results Body SAR GSM1900

Note:

1) * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.3 SAR measurement Result of UMTS Band V

Test Position of Body With 5mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	4182/836.4	RMC	0.586	0.370	0.190	22.26	23.00	0.695	21.4°C
Back Side	4182/836.4	RMC	0.650	0.389	0.000	22.26	23.00	0.771	21.4°C
Left Side	4182/836.4	RMC	0.376	0.234	-0.040	22.26	23.00	0.446	21.4°C
Right Side	4182/836.4	RMC	0.118	0.077	-0.050	22.26	23.00	0.140	21.4°C
Tip Side	4182/836.4	RMC	0.019	0.012	-0.020	22.26	23.00	0.022	21.4°C

Table 26:Test results Body SAR UMTS Band V

7.2.4 SAR measurement Result of UMTS Band II

Test Position of Body With 5 mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	9400/1880	RMC	0.598	0.318	0.090	22.17	23.00	0.724	21.4°C
Back Side	9538/1907.6	RMC	0.988	0.535	0.050	22.09	23.00	1.218	21.4°C
Back Side-repeated*	9538/1907.6	RMC	1.020	0.540	0.140	22.09	23.00	1.258	21.4°C
Back Side	9400/1880	RMC	0.838	0.441	0.020	22.17	23.00	1.014	21.4°C
Back Side	9262/1852.4	RMC	0.674	0.356	0.080	22.23	23.00	0.805	21.4°C
Left Side	9400/1880	RMC	0.413	0.224	-0.140	22.17	23.00	0.500	21.4°C
Right Side	9400/1880	RMC	0.068	0.030	-0.110	22.17	23.00	0.082	21.4°C
Tip Side	9400/1880	RMC	0.041	0.024	-0.040	22.17	23.00	0.049	21.4°C

Table 27:Test results Body SAR UMTS Band II

Note:

- 1) * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.5 SAR measurement Result of LTE Band II

Test Position of Body With 5 mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Front Side	19100/1900	20M QPSK 1RB#50	0.583	0.306	-0.190	22.27	23.00	0.690	21.4°C
Back Side	19100/1900	20M QPSK 1RB#50	1.110	0.588	0.100	22.27	23.00	1.313	21.4°C
Back Side-repeated*	19100/1900	20M QPSK 1RB#50	1.070	0.575	0.070	22.27	23.00	1.266	21.4°C
Back Side	18900/1880	20M QPSK 1RB#50	0.914	0.463	-0.030	22.13	23.00	1.117	21.4°C
Back Side	18700/1860	20M QPSK 1RB#50	0.908	0.458	-0.040	22.26	23.00	1.077	21.4°C
Left Side	19100/1900	20M QPSK 1RB#50	0.532	0.286	-0.070	22.27	23.00	0.629	21.4°C
Right Side	19100/1900	20M QPSK 1RB#50	0.105	0.059	0.150	22.27	23.00	0.124	21.4°C
Tip Side	19100/1900	20M QPSK 1RB#50	0.021	0.012	0.080	22.27	23.00	0.025	21.4°C
50%RB									
Front Side	18700/1860	20M QPSK 50%RB#25	0.583	0.310	0.190	21.05	22.00	0.726	21.4°C
Back Side	19100/1900	20M QPSK 50%RB#50	0.888	0.475	-0.080	21.03	22.00	1.110	21.4°C
Back Side	18900/1880	20M QPSK 50%RB#25	0.978	0.498	0.060	21.01	22.00	1.228	21.4°C
Back Side	18700/1860	20M QPSK 50%RB#25	0.869	0.438	0.010	21.05	22.00	1.081	21.4°C
Left Side	18700/1860	20M QPSK 50%RB#25	0.425	0.235	0.110	21.05	22.00	0.529	21.4°C
Right Side	18700/1860	20M QPSK 50%RB#25	0.063	0.024	0.190	21.05	22.00	0.078	21.4°C
Tip Side	18700/1860	20M QPSK 50%RB#25	0.025	0.015	0.170	21.05	22.00	0.031	21.4°C
100%RB									
Back Side	19100/1900	20M QPSK 100%RB#0	1.080	0.567	0.170	20.98	21.50	1.217	21.4°C

Table 28:Test results Body SAR LTE Band II

Note:

1) * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.6 SAR measurement Result of LTE Band IV

Test Position of Body With 5 mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Front Side	20050/1720	20M QPSK 1RB#50	0.500	0.288	0.010	22.51	23.00	0.560	21.4°C
Back Side	20300/1745	20M QPSK 1RB#99	0.926	0.473	-0.080	22.41	23.00	1.061	21.4°C
Back Side	20175/1732 .5	20M QPSK 1RB#50	0.929	0.475	-0.130	22.30	23.00	1.091	21.4°C
Back Side	20050/1720	20M QPSK 1RB#50	0.799	0.409	0.170	22.51	23.00	0.894	21.4°C
Left Side	20050/1720	20M QPSK 1RB#50	0.621	0.356	-0.070	22.51	23.00	0.695	21.4°C
Right Side	20050/1720	20M QPSK 1RB#50	0.077	0.045	0.080	22.51	23.00	0.086	21.4°C
Tip Side	20050/1720	20M QPSK 1RB#50	0.023	0.014	-0.070	22.51	23.00	0.025	21.4°C
50%RB									
Front Side	20050/1720	20M QPSK 50%RB#25	0.427	0.247	0.110	21.32	22.00	0.499	21.4°C
Back Side	20300/1745	20M QPSK 50%RB#50	0.995	0.521	-0.080	21.06	22.00	1.235	21.4°C
Back Side -repeated*	20300/1745	20M QPSK 50%RB#50	1.060	0.549	0.010	21.06	22.00	1.316	21.4°C
Back Side	20175/1732 .5	20M QPSK 50%RB#0	0.750	0.383	0.130	21.14	22.00	0.914	21.4°C
Back Side	20050/1720	20M QPSK 50%RB#25	0.759	0.387	0.170	21.32	22.00	0.888	21.4°C
Left Side	20050/1720	20M QPSK 50%RB#25	0.607	0.347	-0.170	21.32	22.00	0.710	21.4°C
Right Side	20050/1720	20M QPSK 50%RB#25	0.064	0.037	0.090	21.32	22.00	0.074	21.4°C
Tip Side	20050/1720	20M QPSK 50%RB#25	0.021	0.013	0.160	21.32	22.00	0.024	21.4°C
100%RB									
Back Side	20050/1720	10M QPSK 100%RB#0	0.799	0.420	0.190	21.27	22.00	0.945	21.4°C

Table 29:Test results Body SAR LTE Band IV

Note:

1) * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.7 SAR measurement Result of LTE Band V

Test Position of Body With 5 mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.830	0.518	0.000	22.42	23.00	0.949	21.4°C
Front Side	20525/836.5	10M QPSK 1RB#25	0.702	0.439	-0.040	22.26	23.00	0.832	21.4°C
Front Side	20450/829	10M QPSK 1RB#25	0.895	0.564	0.000	22.69	23.00	0.961	21.4°C
Front Side -repeated*	20450/829	10M QPSK 1RB#25	0.859	0.540	-0.100	22.69	23.00	0.923	21.4°C
Back Side	20600/844	10M QPSK 1RB#25	0.819	0.479	0.050	22.42	23.00	0.936	21.4°C
Back Side	20525/836.5	10M QPSK 1RB#25	0.742	0.437	0.090	22.26	23.00	0.880	21.4°C
Back Side	20450/829	10M QPSK 1RB#25	0.871	0.513	-0.040	22.69	23.00	0.935	21.4°C
Left Side	20450/829	10M QPSK 1RB#25	0.541	0.342	-0.080	22.69	23.00	0.581	21.4°C
Right Side	20450/829	10M QPSK 1RB#25	0.182	0.118	-0.080	22.69	23.00	0.195	21.4°C
Tip Side	20450/829	10M QPSK 1RB#25	0.027	0.018	0.060	22.69	23.00	0.029	21.4°C
50%RB									
Front Side	20450/829	10M QPSK 50%RB#13	0.710	0.446	0.080	21.49	22.00	0.798	21.4°C
Back Side	20600/844	10M QPSK 50%RB#13	0.661	0.386	0.000	21.24	22.00	0.787	21.4°C
Back Side	20525/836.5	10M QPSK 50%RB#13	0.618	0.362	0.180	21.00	22.00	0.778	21.4°C
Back Side	20450/829	10M QPSK 50%RB#13	0.746	0.439	0.090	21.49	22.00	0.839	21.4°C
Left Side	20450/829	10M QPSK 50%RB#13	0.437	0.276	-0.120	21.49	22.00	0.491	21.4°C
Right Side	20450/829	10M QPSK 50%RB#13	0.150	0.098	-0.030	21.49	22.00	0.169	21.4°C
Tip Side	20450/829	10M QPSK 50%RB#13	0.024	0.015	0.090	21.49	22.00	0.026	21.4°C
100%RB									
Front Side	20450/829	10M QPSK 100%RB#0	0.653	0.410	0.000	21.21	22.00	0.783	21.4°C
Back Side	20450/829	10M QPSK 100%RB#0	0.702	0.413	0.160	21.21	22.00	0.842	21.4°C

Table 30:Test results Body SAR LTE Band V

Note:

- 1) * - repeated at the highest SAR measurement according to the FCC KDB 865664

7.2.8 SAR measurement Result of WiFi


Test Position of Body With 5 mm	Channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Limit (dBm)	Scaled SAR1-g (W/kg)	Liquid Temp.
			1-g	10-g					
Front Side	9/2452	802.11 b	0.117	0.059	-0.140	12.99	14.00	0.148	21.4°C
Back Side	9/2452	802.11 b	0.218	0.095	-0.170	12.99	14.00	0.275	21.4°C
Left Side	9/2452	802.11 b	0.007	0.003	0.030	12.99	14.00	0.009	21.4°C
Right Side	9/2452	802.11 b	0.308	0.132	-0.030	12.99	14.00	0.389	21.4°C
Tip Side	9/2452	802.11 b	0.010	0.003	-0.050	12.99	14.00	0.013	21.4°C

Table 31: Test results Body SAR WiFi 2450MHz

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v05.

The location of the antennas inside data card is shown as below picture:

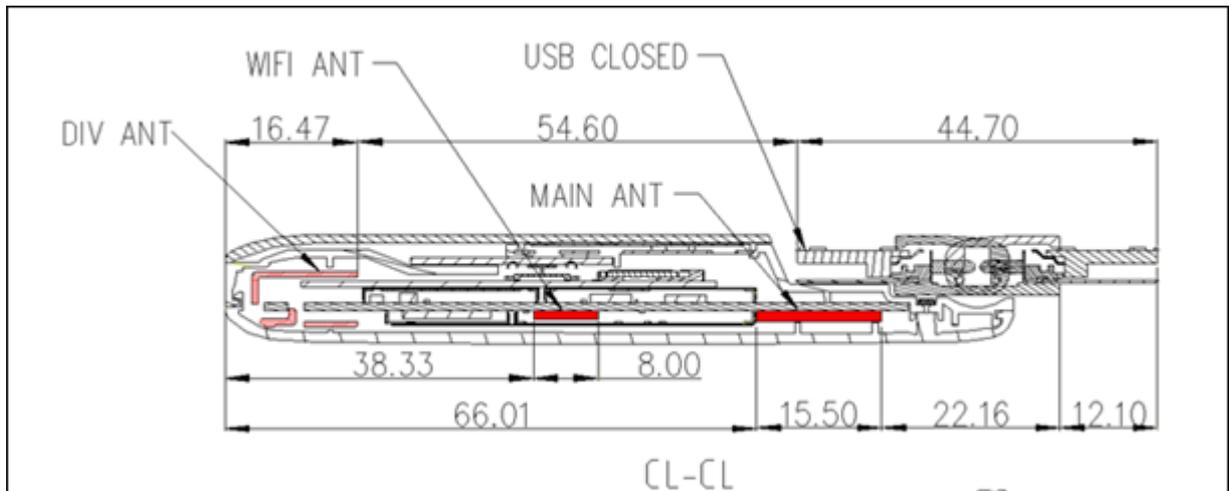

7.3.1 Stand-alone SAR test exclusion

The 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body position

Mode	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	Exclusion threshold	SAR test exclusion
GSM850	33.00	1995.26	5	0.850	367.91	3.00	No
GSM1900	30.00	1000.00	5	1.900	275.68	3.00	No
UMTS Band V	23.00	199.53	5	0.850	36.79	3.00	No
UMTS Band II	23.00	199.53	5	1.900	55.01	3.00	No
LTE Band V	23.00	199.53	5	0.850	36.79	3.00	No
LTE Band IV	23.00	199.53	5	1.800	53.54	3.00	No
LTE Band II	23.00	199.53	5	1.900	55.01	3.00	No
WiFi	14.00	25.12	5	2.450	7.86	3.00	No

Table 32: Standalone SAR test exclusion in Body position

Note: * - maximum possible output power declared by manufacturer

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities are as below:

Simultaneous Transmission Possibilities		
Simultaneous Tx Combination	Configuration	Body
1	GPRS/EGPRS/UMTS/LTE + WiFi	Yes

Table 33: Simultaneous Transmission Possibilities

7.3.3 SAR Summation Scenario

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		GSM850	WiFi			
Body SAR	Front Side	1.163	0.148	1.311	NA	NA
	Back Side	1.059	0.275	1.334	NA	NA
	Left Side	0.613	0.009	0.622	NA	NA
	Right Side	0.225	0.389	0.614	NA	NA
	Tip Side	0.015	0.013	0.028	NA	NA

Table 34: Simultaneous Tx Combination of GSM850 and WiFi

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		GSM1900	WiFi			
Body SAR	Front Side	0.797	0.148	0.945	NA	NA
	Back Side	1.100	0.275	1.375	NA	NA
	Left Side	0.769	0.009	0.778	NA	NA
	Right Side	0.073	0.389	0.462	NA	NA
	Tip Side	0.539	0.013	0.552	NA	NA

Table 35: Simultaneous Tx Combination of GSM1900 and WiFi

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		UMTS Band V	WiFi			
Body SAR	Front Side	0.695	0.148	0.843	NA	NA
	Back Side	0.771	0.275	1.046	NA	NA
	Left Side	0.446	0.009	0.455	NA	NA
	Right Side	0.140	0.389	0.529	NA	NA
	Tip Side	0.022	0.013	0.035	NA	NA

Table 36: Simultaneous Tx Combination of UMTS Band V and WiFi

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		UMTS Band II	WiFi			
Body SAR	Front Side	0.724	0.148	0.872	NA	NA
	Back Side	1.258	0.275	1.533	NA	NA
	Left Side	0.500	0.009	0.509	NA	NA
	Right Side	0.082	0.389	0.471	NA	NA
	Tip Side	0.049	0.013	0.062	NA	NA

Table 37: Simultaneous Tx Combination of UMTS Band II and WiFi

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		LTE Band II	WiFi			
Body SAR	Front Side	0.726	0.148	0.874	NA	NA
	Back Side	1.313	0.275	1.588	NA	NA
	Left Side	0.629	0.009	0.638	NA	NA
	Right Side	0.124	0.389	0.513	NA	NA
	Tip Side	0.031	0.013	0.044	NA	NA

Table 38: Simultaneous Tx Combination of LTE Band II and WiFi

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		LTE Band IV	WiFi			
Body SAR	Front Side	0.560	0.148	0.708	NA	NA
	Back Side	1.316	0.275	1.591	NA	NA
	Left Side	0.710	0.009	0.719	NA	NA
	Right Side	0.086	0.389	0.475	NA	NA
	Tip Side	0.025	0.013	0.038	NA	NA

Table 39: Simultaneous Tx Combination of LTE Band IV and WiFi

Test Position		Scaled SAR _{Max}		Σ1-g SAR	SPLSR	Remark
		LTE Band V	WiFi			
Body SAR	Front Side	0.961	0.148	1.109	NA	NA
	Back Side	0.936	0.275	1.211	NA	NA
	Left Side	0.581	0.009	0.590	NA	NA
	Right Side	0.195	0.389	0.584	NA	NA
	Tip Side	0.030	0.013	0.043	NA	NA

Table 40: Simultaneous Tx Combination of LTE Band V and WiFi

Conclusion:

Simultaneous Transmission SAR evaluation is not required for GSM&UMTS<E and WiFi, because the highest Σ1-g SAR of all combinations of simultaneous transmission is 1.591W/kg < 1.6W/kg.

Appendix A. System Check Plots
(Pls See Appendix A.)

Appendix B. SAR Measurement Plots
(Pls See Appendix B.)

Appendix C. Calibration Certificate
(Pls See Appendix C.)

Appendix D. Photo documentation
(Pls See Appendix D.)

End