



中国认可
国际互认
检测
TESTING
CNAS L2264

RF TEST REPORT

Applicant Huawei Technologies Co., Ltd.
Product eLTE-IoT AirNode
Model eAN3710A
Report No. RHA1612-0107RF01R1
Issue Date March 21, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2016)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. Average Power Output –Conducted.....	9
5.2. 6dB Bandwidth	11
5.3. Band Edge	13
5.4. Power Spectral Density	15
5.5. Spurious RF Conducted Emissions.....	17
5.6. Radiated Emissions in the Restricted Band	19
5.7. Radiates Emission	22
5.8. Conducted Emission	37
6. Main Test Instruments.....	40
ANNEX A: EUT Appearance and Test Setup	41
A.1 EUT Appearance	41
A.2 Test Setup	43



Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Maximum Average conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Maximum power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Radiated Emissions in restricted frequency bands	15.247(d),15.205,15.209	PASS
7	Radiated Emissions	15.247(d),15.205,15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: December 23, 2016 ~ March 20, 2017			



1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Huawei Technologies Co., Ltd.
Applicant address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.
Manufacturer	Huawei Technologies Co., Ltd.
Manufacturer address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.China.

General information

EUT Description	
Model:	eAN3710A
S/N:	2102311SUJ10GC000006
Hardware Version:	V100R001C01
Software Version:	eAN3710A V100R001C00
Power Supply:	PoE: -48V DC
Antenna Type:	Extenal Antenna
Modulation Type:	64QAM
Max. Conducted Power	26.51dBm
Operating Frequency Range(s)	902 ~ 928 MHz
EUT Accessory	
Charger	Manufacturer: FSP Model: POE85-56A
Note: The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.	



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2016) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v03r05**

4. Test Configuration

Test Mode

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application (antenna port connected 50ohm load). The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

5. Test Case Results

5.1. Average Power Output –Conducted


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Average power meter with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method in KDB 558074 D01 for this test.

Test Setup

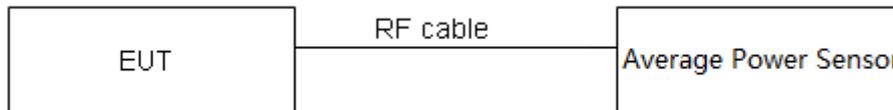

Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.


Test Results

Network Standards	Carrier frequency (MHz)	Power Index	Average Output Power (dBm)	Limit (dBm)	Conclusion
902 ~ 928 MHz	903.3	24	26.36	30	PASS
	905	24	26.51	30	PASS
	922	24	26.33	30	PASS
	926.7	24	26.22	30	PASS


Carrier frequency (MHz): 903.3

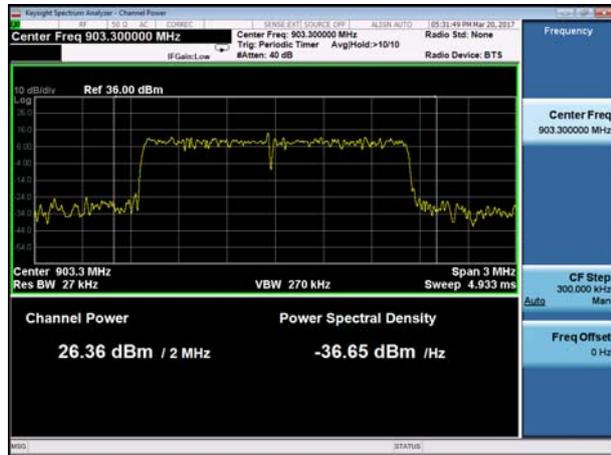


Carrier frequency (MHz): 905

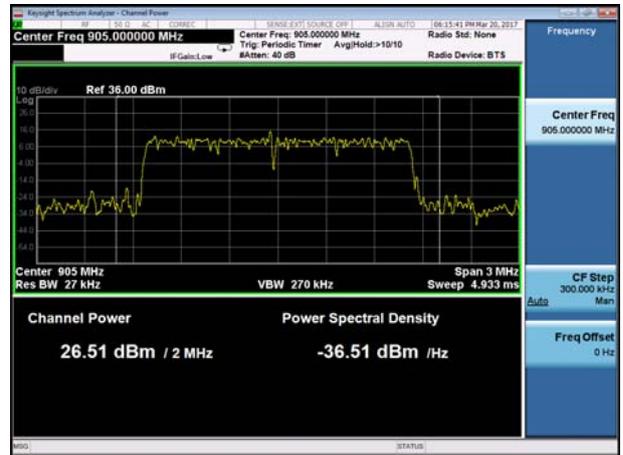

Carrier frequency (MHz): 922

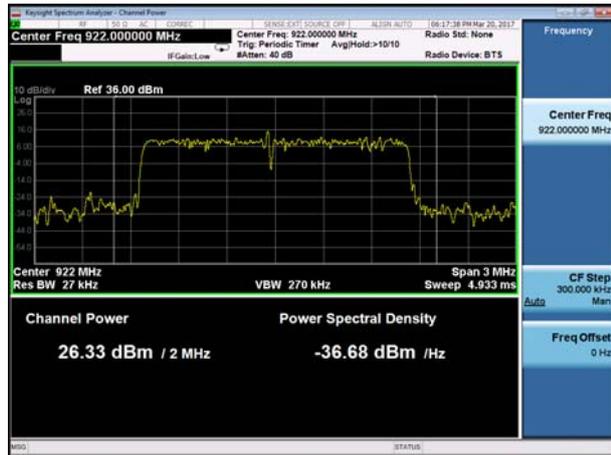

Carrier frequency (MHz): 926.7

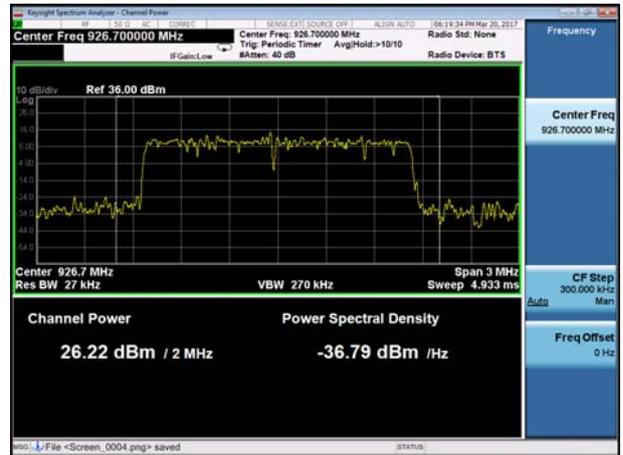

5.2. 6dB Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.

Test Setup

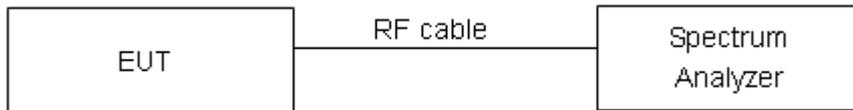

Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.



Test Results:

Network Standards	Carrier frequency (MHz)	Minimum 6 dB bandwidth (MHz)	Limit(kHz)	Conclusion
902 ~ 928MHz	903.3	1.623	≥ 500 kHz	PASS
	905	1.627	≥ 500 kHz	PASS
	922	1.652	≥ 500 kHz	PASS
	926.7	1.636	≥ 500 kHz	PASS

Carrier frequency (MHz): 903.3



Carrier frequency (MHz): 905



Carrier frequency (MHz): 922



Carrier frequency (MHz): 926.7



5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup

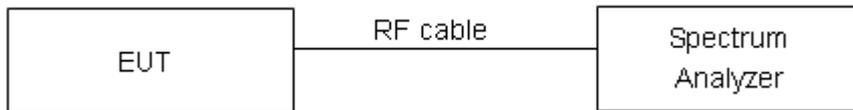

Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results: PASS


Carrier frequency (MHz): 903.3

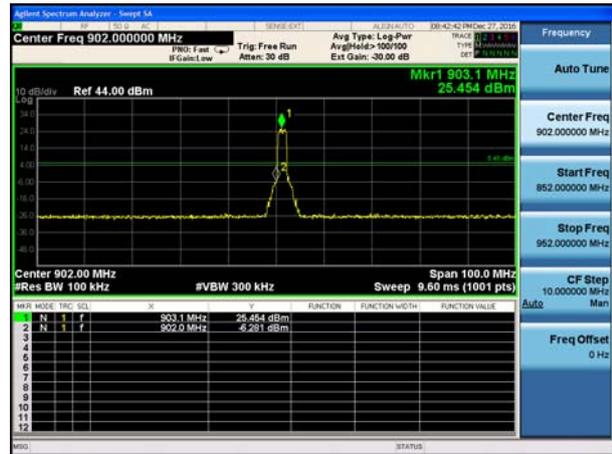


Carrier frequency (MHz): 905

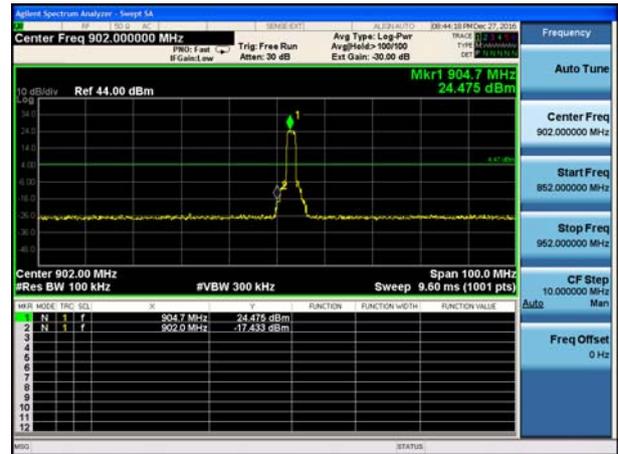

Carrier frequency (MHz): 922

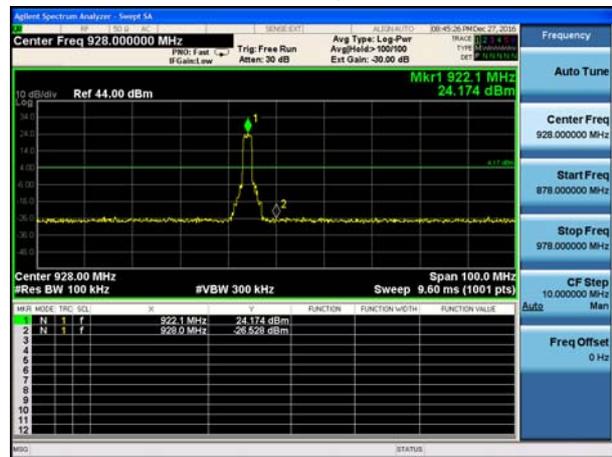

Carrier frequency (MHz): 926.7

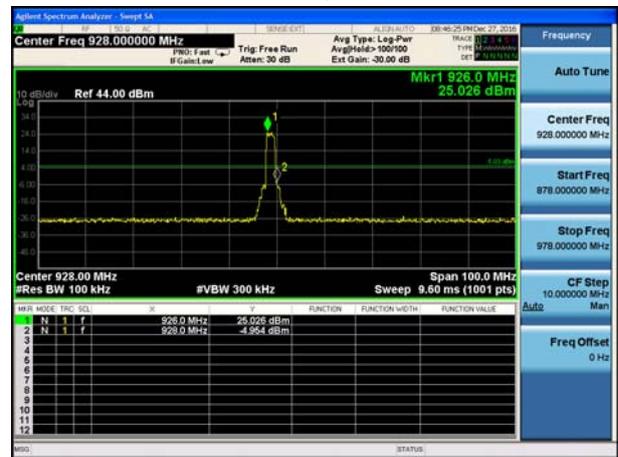

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

RBW is set to 3 kHz and VBW is set to 10 kHz on spectrum analyzer.

Set the span to 1.5 times the DTS channel bandwidth. Sweep time = auto couple. Trace mode = max hold. The Average power spectral density is recorded.

Test setup

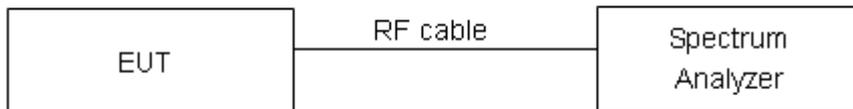

Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	≤ 8 dBm / 3kHz
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.



Test Results:

Network Standards	Channel Number	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
902 ~ 928MHz	903.3	-2.959	8	PASS
	905	-3.251	8	PASS
	922	-3.843	8	PASS
	926.7	-4.170	8	PASS


Carrier frequency (MHz): 903.3




Carrier frequency (MHz): 905



Carrier frequency (MHz): 922

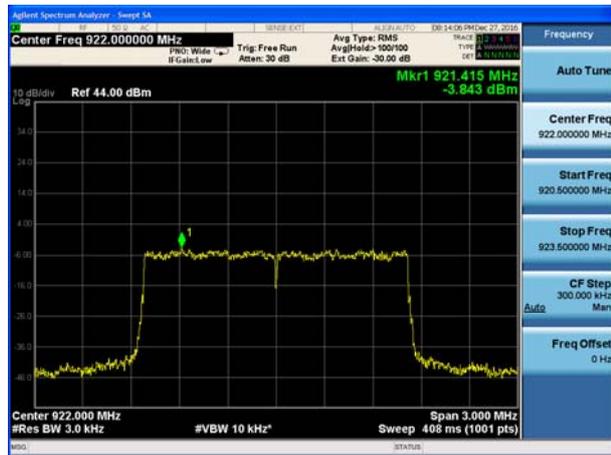

Carrier frequency (MHz): 926.7

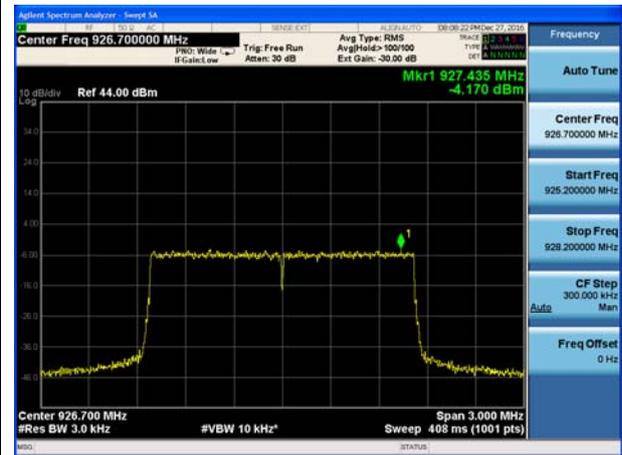

5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
902 ~ 928MHz	903.3	13.297	-6.703
	905	14.663	-5.337
	922	15.588	-4.412
	926.7	14.283	-5.717

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB




Test Results:


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.
The signal beyond the limit is carrier.

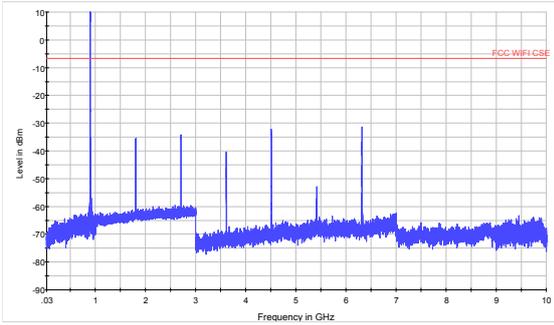


CSE_903.3MHz_0.03-10GHz

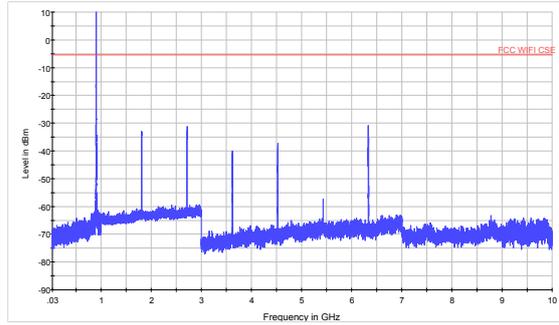

CSE_905MHz_0.03-10GHz

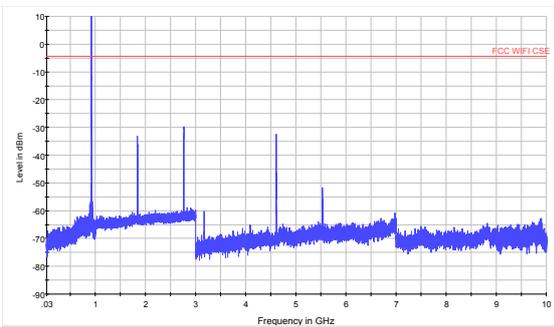

CSE_922MHz_0.03-10GHz

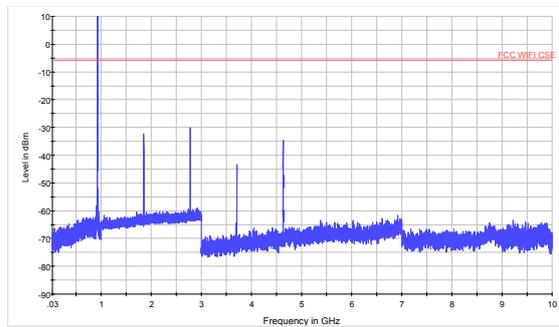

CSE_926.7MHz_0.03-10GHz

5.6. Radiated Emissions in the Restricted Band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:
 Below 1GHz (detector: Peak and Quasi-Peak)
 RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Y axis) and the antenna is vertical.

The test is in transmitting mode.

Test setup

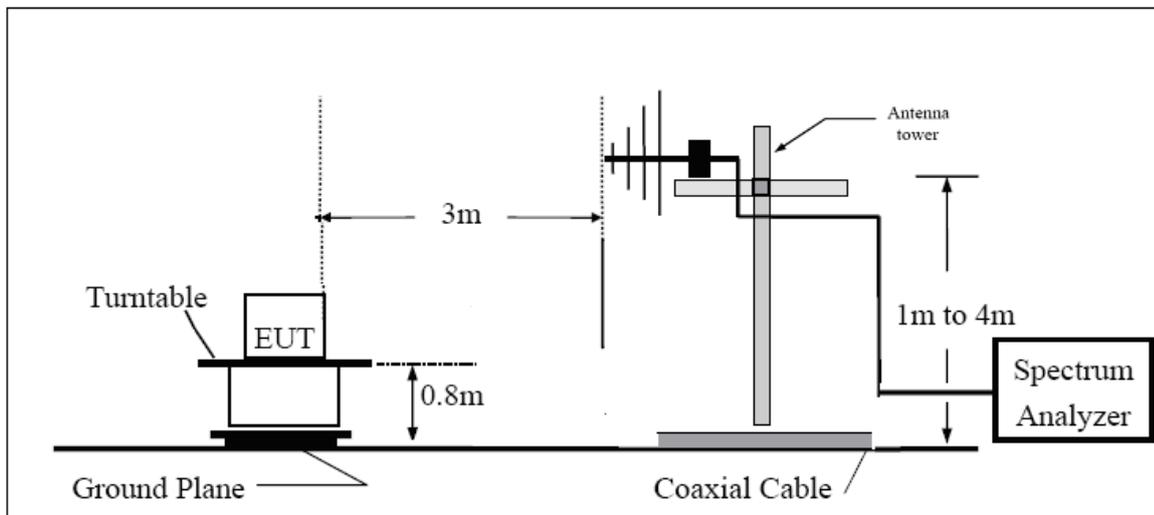

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.




Test Results:


The signal beyond the limit is carrier.

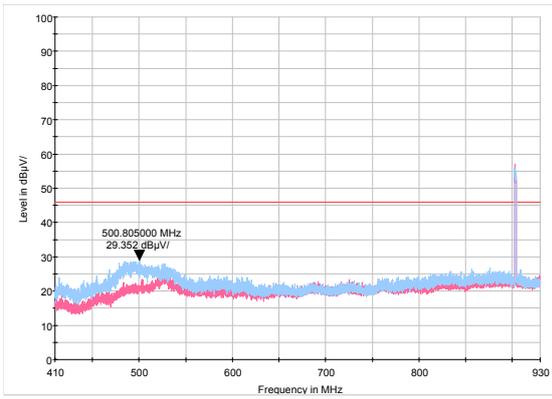


903.3MHz_410-930MHz

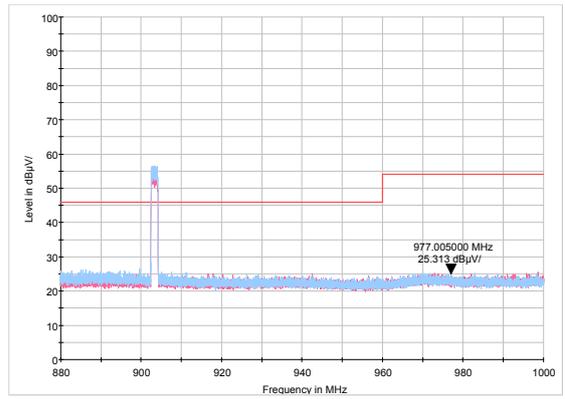


903.3MHz_880-1000MHz

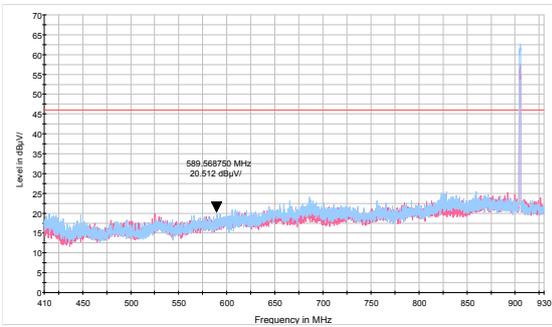


905MHz_410-930MHz

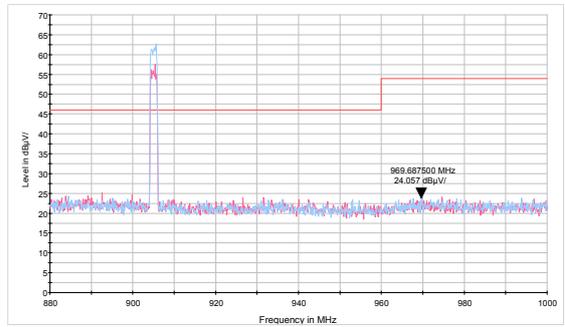


905MHz_880-1000MHz

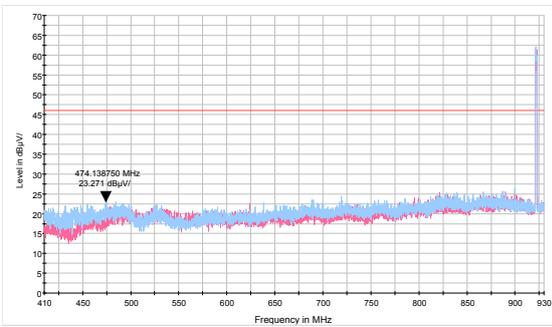


922MHz_410-930MHz

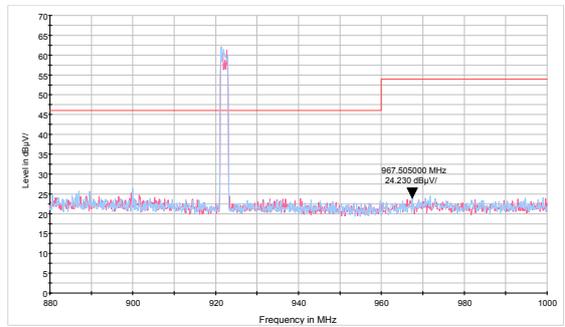

922MHz_880-1000MHz

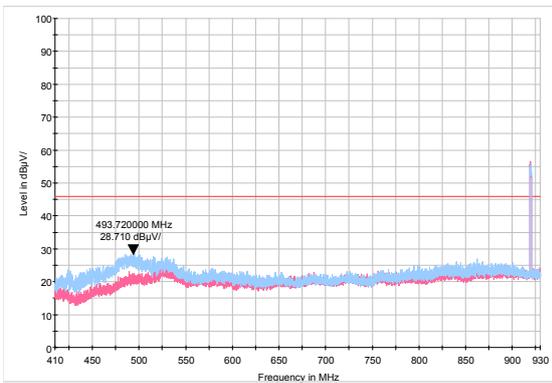

926.7MHz_410-930MHz

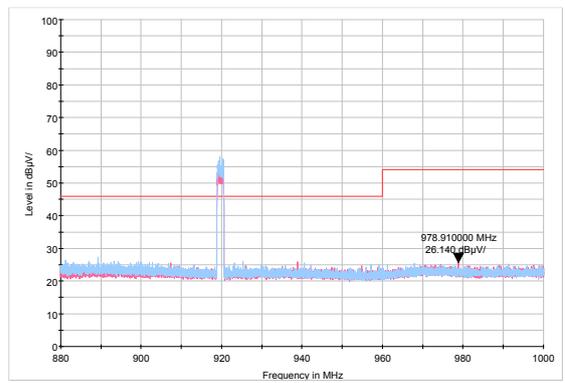

926.7MHz_880-1000MHz

5.7. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz~~~ 30MHz

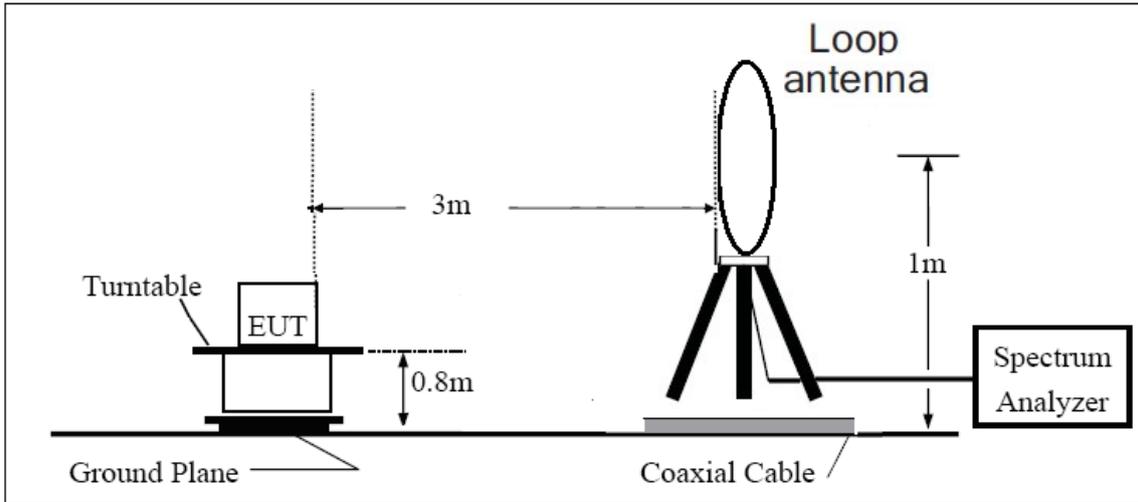

30MHz~~~ 1GHz

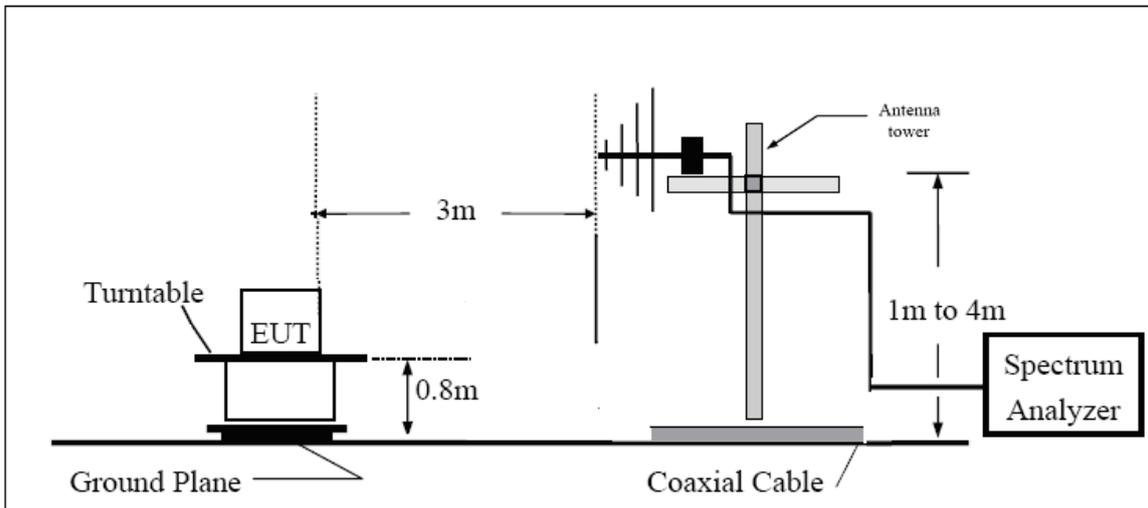

Above 1GHz

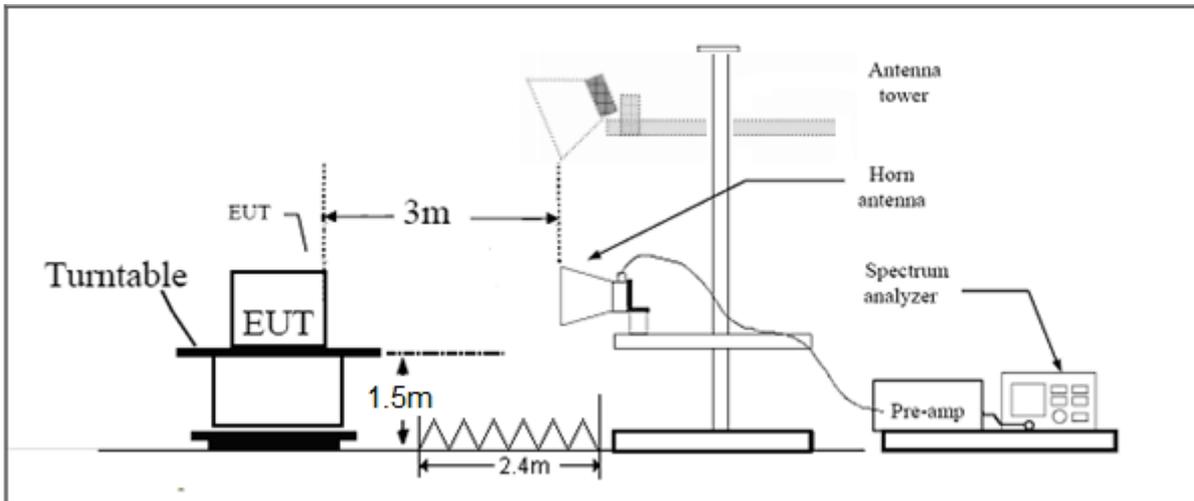

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB


Test result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

903.3MHz

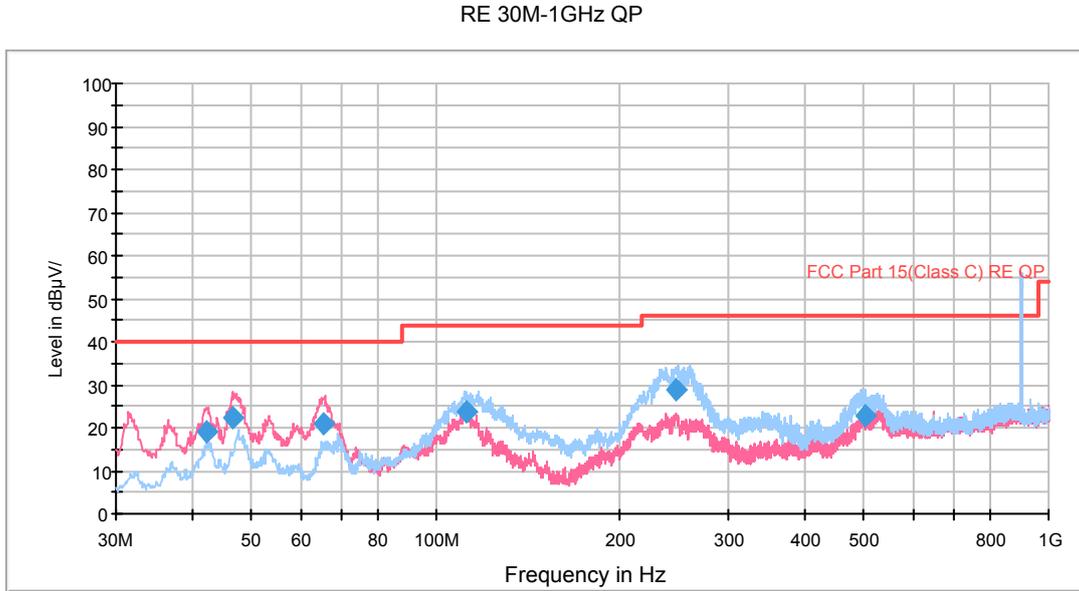


Note: The signal beyond the limit is carrier.
Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
42.301581	19.2	101.0	V	114.0	39.6	-20.4	20.8	40.0
46.606225	22.4	101.0	V	8.0	42.8	-20.4	17.6	40.0
65.604328	20.8	101.0	V	296.0	44.9	-24.1	19.2	40.0
111.643194	23.9	227.0	H	336.0	50.0	-26.1	19.6	43.5
247.024750	28.6	121.0	H	160.0	53.5	-24.9	17.4	46.0
500.609250	22.8	101.0	H	75.0	41.8	-19.0	23.2	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor
- 2. Correction Factor = Antenna factor+ Insertion loss (cable loss+amplifier gain)
- 3. Margin = Limit – Quasi-Peak

RE 1G-3GHz PK+AV

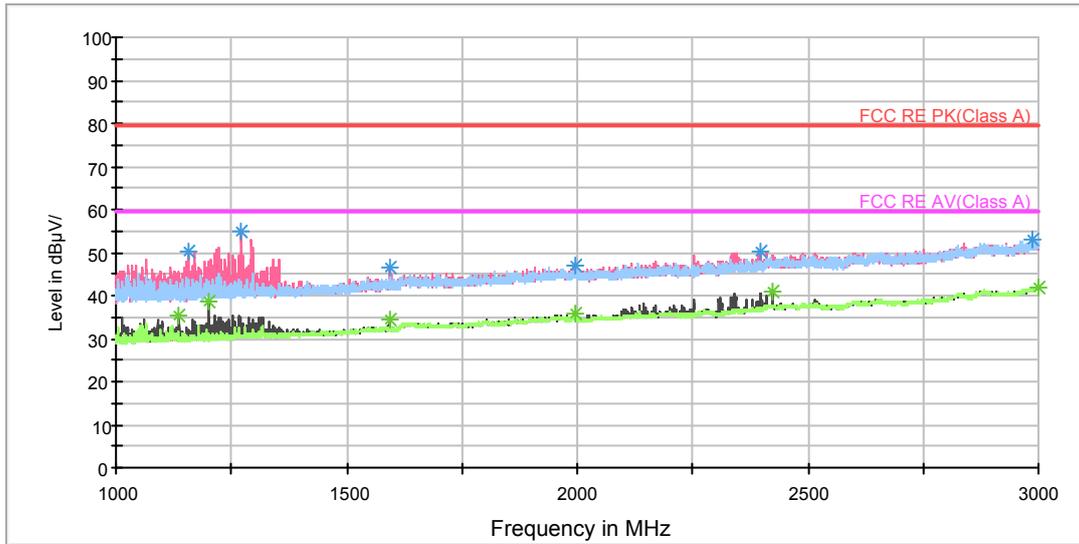

Radiates Emission from 1GHz to 3GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1155.750000	50.2	102.0	V	0.0	58.6	-8.4	23.8	74
1272.750000	54.9	102.0	V	211.0	62.6	-7.7	19.1	74
1595.750000	46.3	102.0	V	0.0	52.7	-6.4	27.7	74
1995.500000	46.8	102.0	H	91.0	50.0	-3.2	27.2	74
2397.000000	50.1	102.0	V	190.0	51.4	-1.3	23.9	74
2987.750000	53.1	202.0	V	123.0	55.3	2.2	20.9	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1137.000000	35.4	102.0	V	289.0	43.9	-8.5	18.6	54
1202.250000	38.7	102.0	V	211.0	46.9	-8.2	15.3	54
1595.750000	34.5	102.0	V	0.0	40.9	-6.4	19.5	54
1997.250000	35.7	102.0	V	79.0	39.0	-3.3	18.3	54
2424.250000	40.8	102.0	V	200.0	41.3	-0.5	13.2	54
2998.500000	42.1	202.0	H	177.0	44.4	2.3	11.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



RE 3-18GHz PK+AV

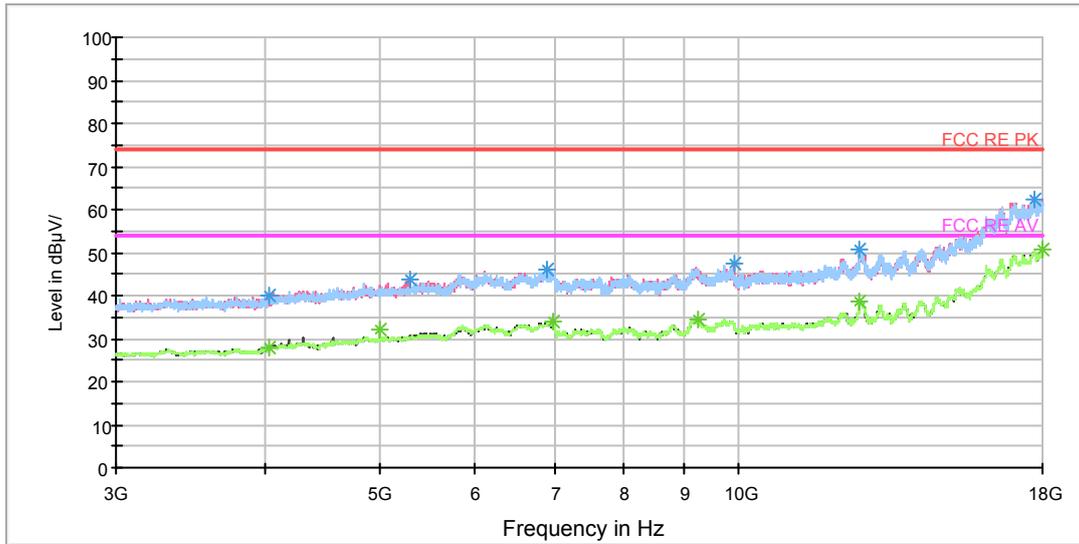

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4040.625000	40.2	102.0	H	223.0	41.2	-1.0	33.8	74
5296.875000	43.6	102.0	V	183.0	46.0	2.4	30.4	74
6903.750000	46.0	202.0	V	83.0	52.3	6.3	28.0	74
9900.000000	47.3	102.0	V	344.0	57.6	10.3	26.7	74
12643.125000	50.8	102.0	V	0.0	65.2	14.4	23.2	74
17720.625000	62.3	202.0	V	16.0	86.9	24.6	11.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4036.875000	28.1	102.0	V	160.0	29.1	-1.0	25.9	54
4998.750000	31.9	202.0	V	269.0	33.5	1.6	22.1	54
6990.000000	33.9	202.0	H	341.0	40.4	6.5	20.1	54
9241.875000	34.6	202.0	H	183.0	44.5	9.9	19.4	54
12639.375000	38.6	102.0	H	0.0	53.1	14.5	15.4	54
17998.125000	50.6	202.0	V	0.0	76.0	25.4	3.4	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



905MHz

RE 30M-1GHz QP

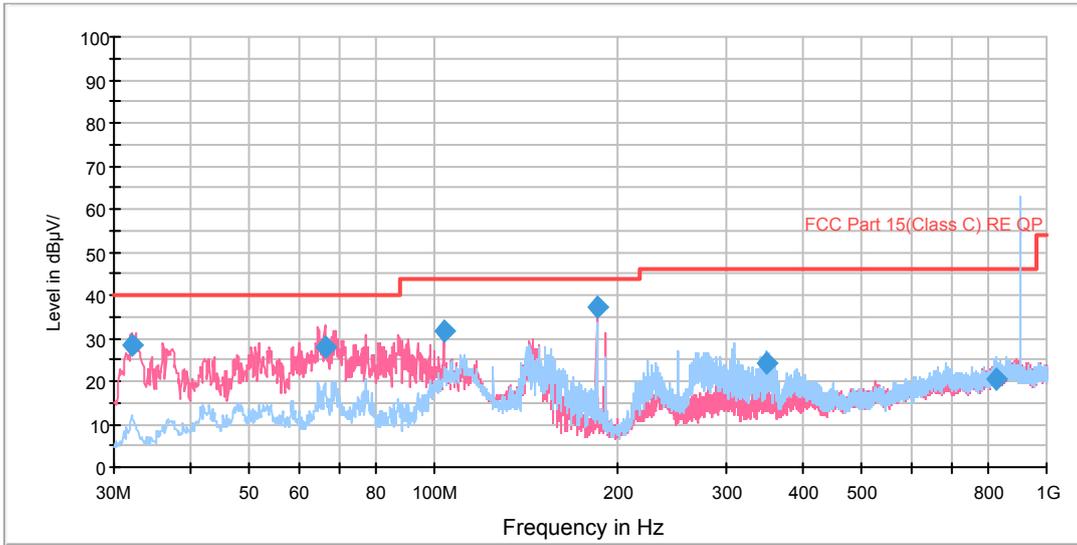


Note: The signal beyond the limit is carrier.
 Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
32.061097	28.2	101.0	V	164.0	50.7	-22.5	11.8	40.0
66.328116	28.1	101.0	V	279.0	52.7	-24.6	11.9	40.0
103.700700	31.7	101.0	V	15.0	57.4	-25.7	11.8	43.5
184.249425	37.0	101.0	V	22.0	64.6	-27.6	6.5	43.5
348.411500	24.4	101.0	H	97.0	46.9	-22.5	21.6	46.0
825.120250	20.6	101.0	H	36.0	34.4	-13.8	25.4	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor
 2. Correction Factor = Antenna factor+ Insertion loss (cable loss+amplifier gain)
 3. Margin = Limit – Quasi-Peak

RE 1G-3GHz PK+AV

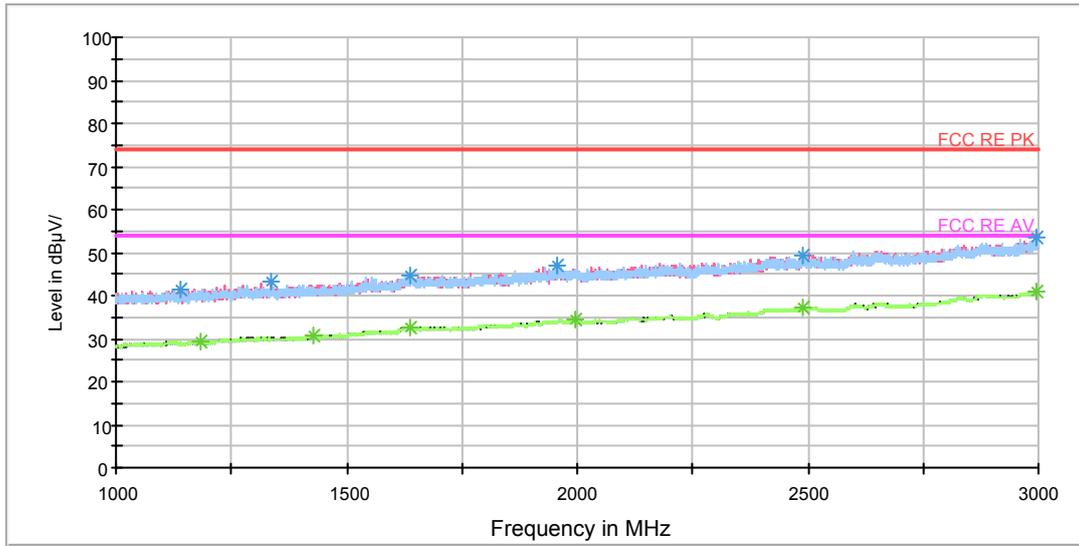

Radiates Emission from 1GHz to 3GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1139.250000	41.4	101.0	V	277.0	49.9	-8.5	32.6	74
1338.250000	43.0	101.0	V	0.0	50.4	-7.4	31.0	74
1637.000000	44.8	101.0	H	158.0	49.5	-4.7	29.2	74
1956.500000	46.8	101.0	V	277.0	50.2	-3.4	27.2	74
2490.500000	49.4	101.0	H	139.0	49.7	0.3	24.6	74
2995.250000	53.5	101.0	H	0.0	55.8	2.3	20.5	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1182.500000	29.5	101.0	V	0.0	37.5	-8.0	24.5	54
1427.750000	30.5	101.0	V	179.0	37.4	-6.9	23.5	54
1636.250000	32.7	101.0	H	279.0	37.4	-4.7	21.3	54
1996.500000	34.5	101.0	V	199.0	37.8	-3.3	19.5	54
2491.250000	37.1	101.0	H	178.0	37.4	0.3	16.9	54
2995.750000	41.1	101.0	H	197.0	43.4	2.3	12.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

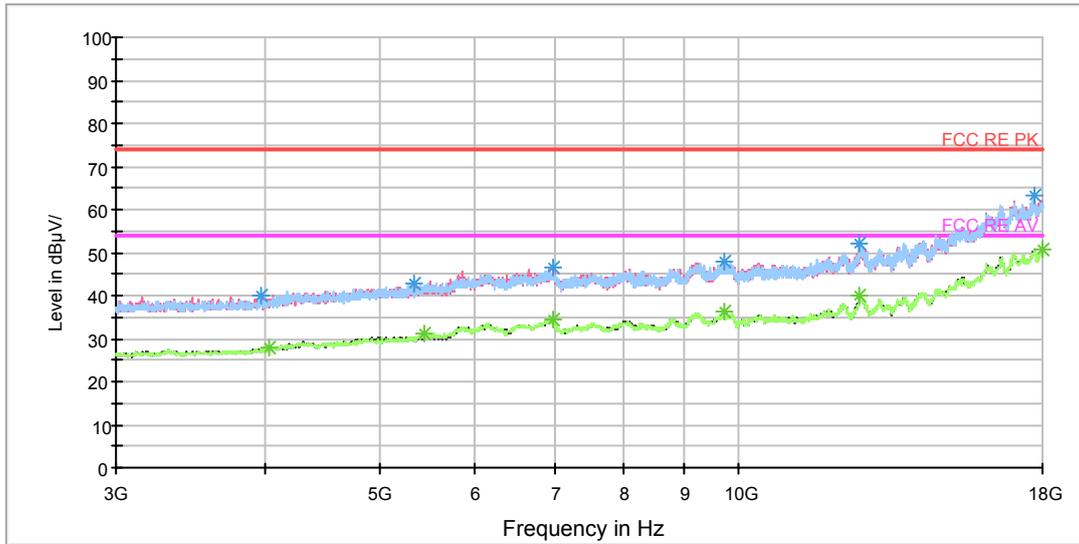

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3971.250000	39.8	101.0	V	0.0	40.7	-0.9	34.2	74
5338.125000	42.6	101.0	H	0.0	44.9	2.3	31.4	74
6980.625000	46.7	101.0	H	246.0	53.1	6.4	27.3	74
9738.750000	47.9	101.0	V	231.0	57.9	10.0	26.1	74
12637.500000	52.2	101.0	V	0.0	66.5	14.3	21.8	74
17715.000000	63.1	101.0	V	0.0	87.7	24.6	10.9	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4038.750000	27.8	101.0	V	0.0	28.8	-1.0	26.2	54
5437.500000	31.0	101.0	H	0.0	33.9	2.9	23.0	54
6997.500000	34.3	101.0	H	110.0	40.8	6.5	19.7	54
9744.375000	36.2	101.0	V	0.0	46.1	9.9	17.8	54
12645.000000	40.1	101.0	H	0.0	54.5	14.4	13.9	54
18000.000000	50.7	101.0	H	154.0	76.2	25.5	3.3	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

922MHz

RE 30M-1GHz QP

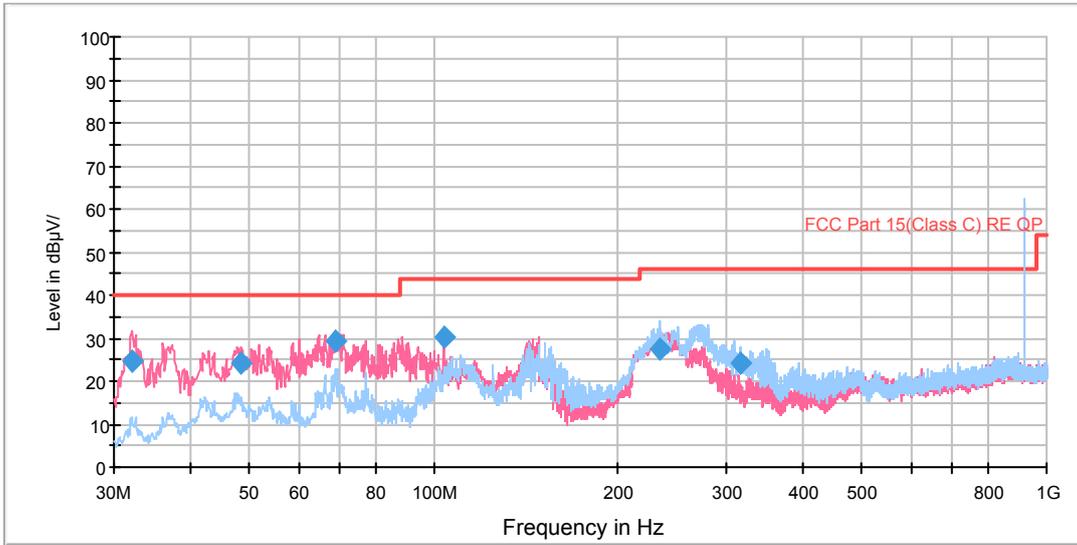


Note: The signal beyond the limit is carrier.
Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
32.061097	24.7	101.0	V	0.0	47.2	-22.5	15.3	40.0
48.468925	24.1	101.0	V	0.0	44.4	-20.3	15.9	40.0
68.989894	29.3	101.0	V	314.0	55.4	-26.1	10.7	40.0
103.699753	30.4	101.0	V	16.0	56.1	-25.7	13.1	43.5
233.794000	27.6	126.0	H	93.0	53.1	-25.5	18.4	46.0
316.280750	24.2	101.0	H	310.0	47.4	-23.2	21.8	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor
 2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
 3. Margin = Limit – Quasi-Peak



RE 1G-3GHz PK+AV

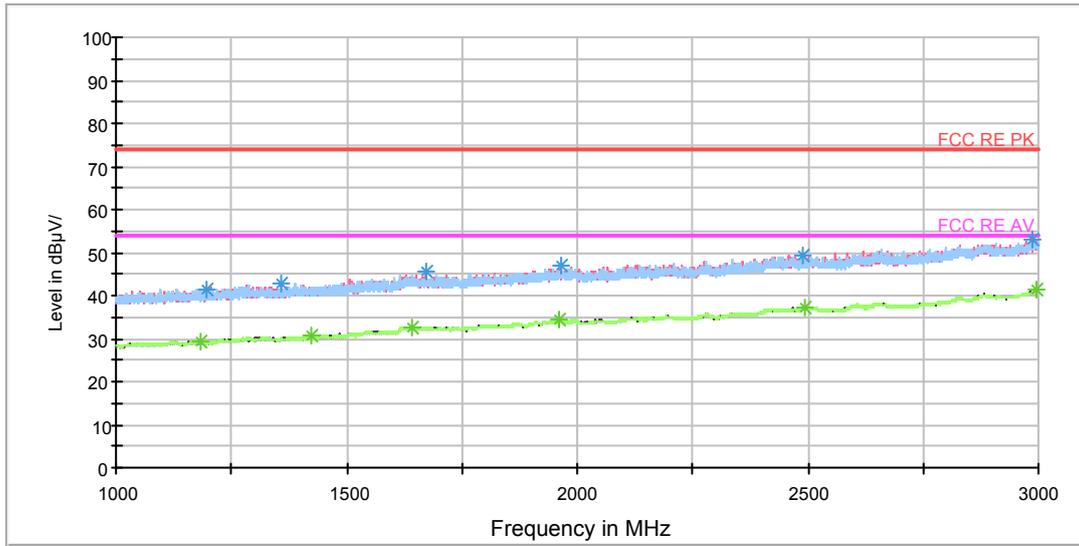

Radiates Emission from 1GHz to 3GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.750000	41.6	101.0	H	200.0	49.8	-8.2	32.4	74
1357.750000	42.6	101.0	V	0.0	50.1	-7.5	31.4	74
1673.500000	45.5	101.0	V	240.0	50.6	-5.1	28.5	74
1964.250000	46.9	101.0	V	278.0	50.2	-3.3	27.1	74
2488.250000	49.3	101.0	H	122.0	49.5	0.2	24.7	74
2986.750000	53.0	101.0	H	219.0	55.2	2.2	21.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1182.250000	29.5	101.0	H	160.0	37.5	-8.0	24.5	54
1424.000000	30.6	101.0	V	240.0	37.5	-6.9	23.4	54
1640.500000	32.8	101.0	V	142.0	37.5	-4.7	21.2	54
1962.750000	34.4	101.0	H	102.0	37.7	-3.3	19.6	54
2492.000000	37.3	101.0	H	64.0	37.6	0.3	16.7	54
2997.500000	41.3	101.0	H	42.0	43.6	2.3	12.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

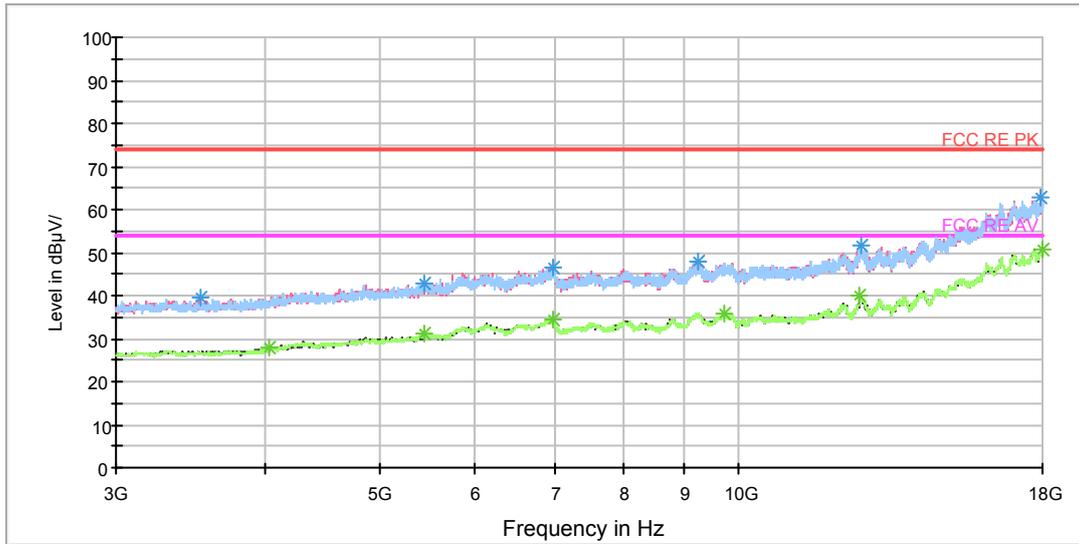

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3526.875000	39.4	101.0	V	184.0	41.4	-2.0	34.6	74
5448.750000	42.9	101.0	H	0.0	45.7	2.8	31.1	74
6980.625000	46.4	101.0	V	0.0	52.8	6.4	27.6	74
9234.375000	48.1	101.0	H	63.0	58.0	9.9	25.9	74
12682.500000	51.7	101.0	H	0.0	65.9	14.2	22.3	74
17921.250000	62.9	101.0	V	91.0	88.6	25.7	11.1	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4038.750000	27.7	101.0	H	199.0	28.7	-1.0	26.3	54
5446.875000	31.0	101.0	H	0.0	33.8	2.8	23.0	54
6997.500000	34.4	101.0	H	292.0	40.9	6.5	19.6	54
9742.500000	35.9	101.0	H	41.0	45.9	10.0	18.1	54
12641.250000	40.2	101.0	H	153.0	54.7	14.5	13.8	54
18000.000000	50.8	101.0	V	207.0	76.3	25.5	3.2	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



926.7MHz

RE 30M-1GHz QP

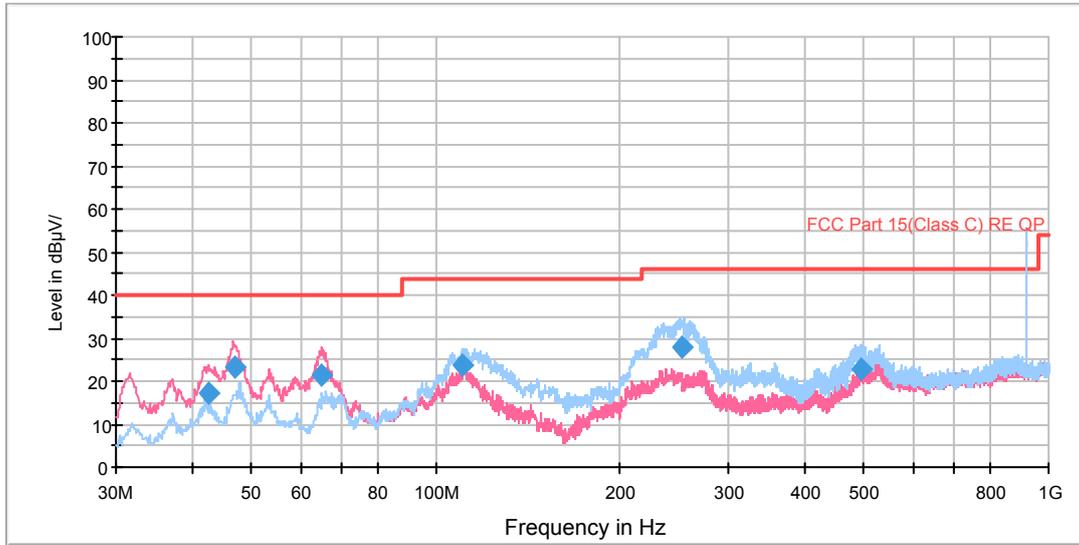


Note: The signal beyond the limit is carrier.
 Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
42.382528	17.3	101.0	V	74.0	37.7	-20.4	22.7	40.0
46.727778	23.3	101.0	V	41.0	43.7	-20.4	16.7	40.0
65.119594	21.5	101.0	V	300.0	45.3	-23.8	18.5	40.0
110.664722	23.6	227.0	H	336.0	49.6	-26.0	19.9	43.5
252.507000	28.0	121.0	H	165.0	52.7	-24.7	18.0	46.0
494.513500	22.8	101.0	H	78.0	42.1	-19.3	23.2	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor
 2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)
 3. Margin = Limit – Quasi-Peak

RE 1G-3GHz PK+AV

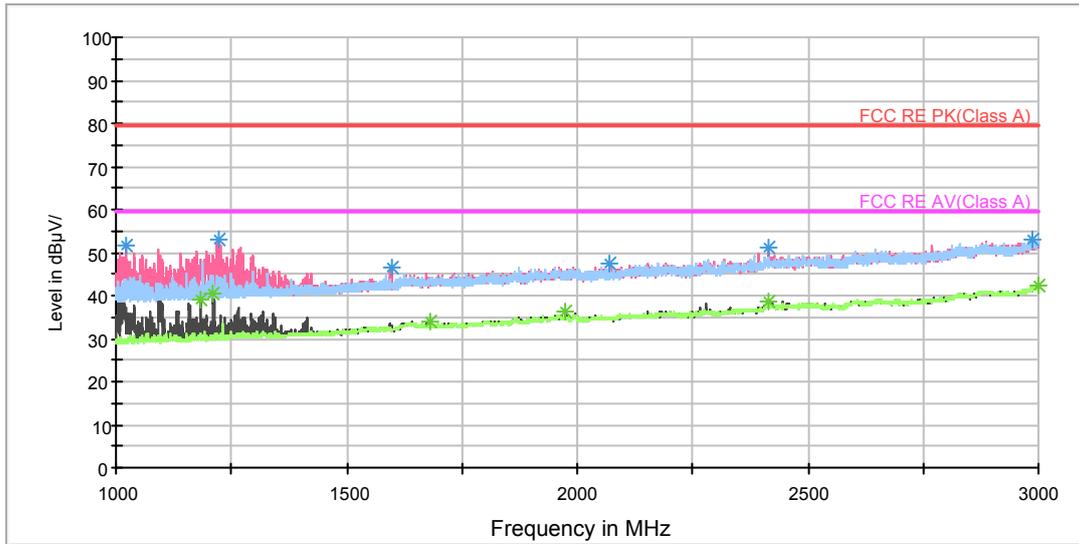

Radiates Emission from 1GHz to 3GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1023.250000	51.8	102.0	V	285.0	60.9	-9.1	22.2	74
1222.750000	52.9	102.0	V	337.0	60.7	-7.8	21.1	74
1596.750000	46.6	102.0	V	7.0	53.0	-6.4	27.4	74
2071.750000	47.3	102.0	H	264.0	50.4	-3.1	26.7	74
2415.000000	51.1	102.0	V	171.0	51.7	-0.6	22.9	74
2988.750000	53.1	202.0	H	215.0	55.3	2.2	20.9	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1182.750000	39.0	102.0	V	197.0	47.0	-8.0	15.0	54
1211.750000	40.3	102.0	V	207.0	48.3	-8.0	13.7	54
1681.000000	33.8	202.0	V	154.0	38.9	-5.1	20.2	54
1974.500000	36.2	102.0	V	7.0	39.8	-3.6	17.8	54
2415.000000	38.7	102.0	V	171.0	39.3	-0.6	15.3	54
2998.250000	42.2	102.0	V	250.0	44.5	2.3	11.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

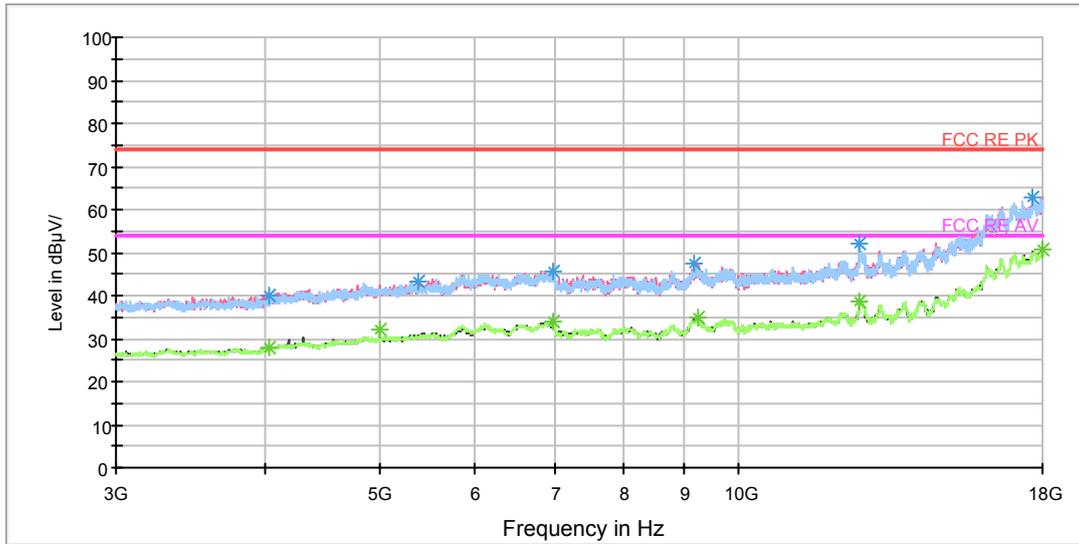

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4036.875000	40.0	102.0	H	293.0	41.0	-1.0	34.0	74
5379.375000	43.2	202.0	V	174.0	45.5	2.3	30.8	74
6993.750000	45.8	202.0	H	250.0	52.3	6.5	28.2	74
9161.250000	47.6	102.0	V	340.0	57.9	10.3	26.4	74
12646.875000	51.9	102.0	H	0.0	66.2	14.3	22.1	74
17653.125000	62.8	102.0	V	206.0	87.2	24.4	11.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4040.625000	28.1	202.0	V	129.0	29.1	-1.0	25.9	54
4998.750000	32.1	202.0	V	15.0	33.7	1.6	21.9	54
6995.625000	33.8	202.0	H	0.0	40.3	6.5	20.2	54
9234.375000	34.7	202.0	H	0.0	44.6	9.9	19.3	54
12641.250000	38.6	202.0	H	43.0	53.1	14.5	15.4	54
17998.125000	50.5	102.0	V	183.0	75.9	25.4	3.5	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

5.8. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

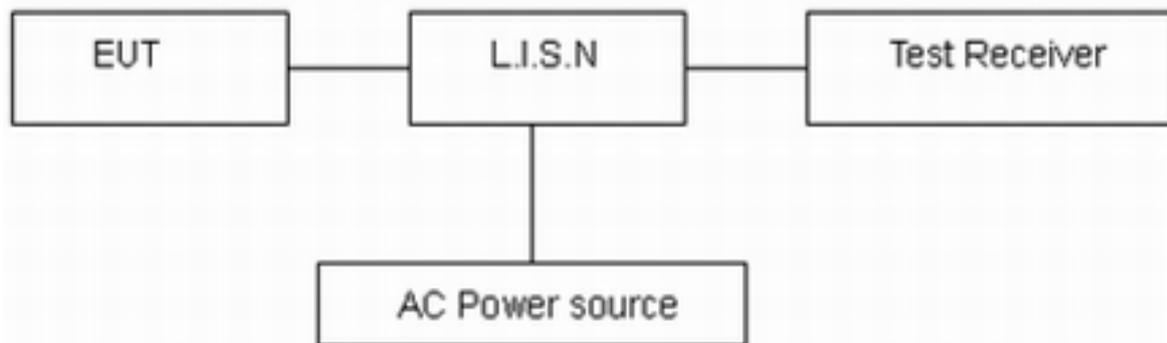

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.




Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

903.3MHz


L Line

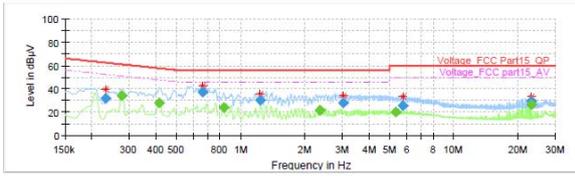

Final Result

Table with 11 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 12 rows of test data for the 903.3MHz L Line.

N Line

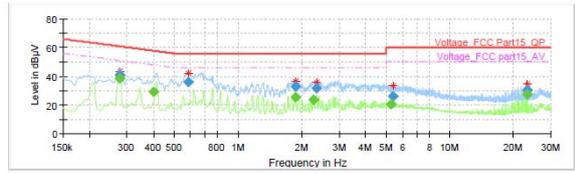


Final Result

Table with 11 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 12 rows of test data for the 903.3MHz N Line.

905MHz


L Line

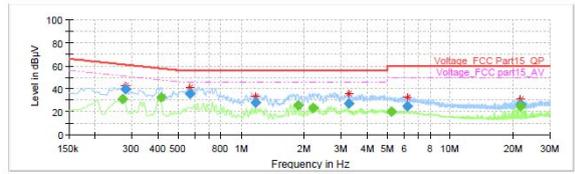

Final Result

Table with 11 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 18 rows of test data for the 905MHz L Line.

N Line

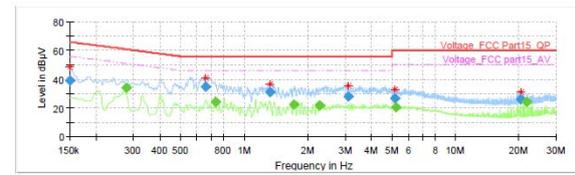


Final Result

Table with 11 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 14 rows of test data for the 905MHz N Line.



922MHz


L Line

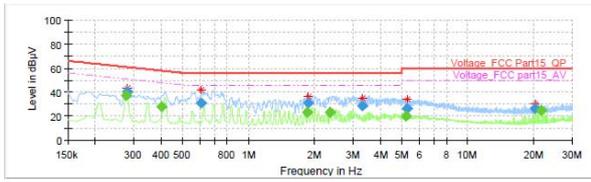

Final Result

Table with 10 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

N Line

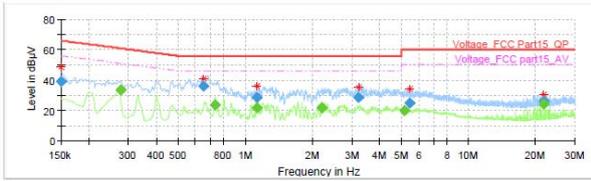


Final Result

Table with 10 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

926.7MHz


L Line

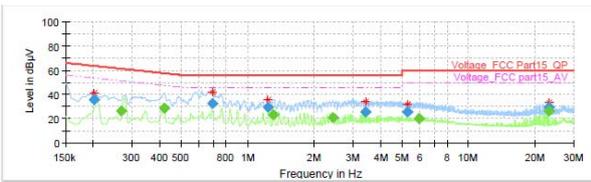

Final Result

Table with 10 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

N Line

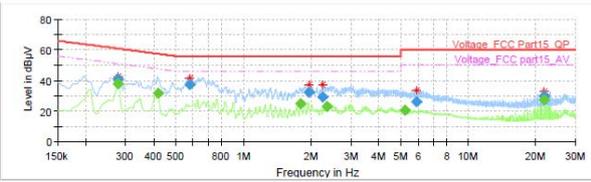

Final Result

Table with 10 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.



6. Main Test Instruments

Name	Type	Manufacturer	Serial Number	Calibration Date	Expiration Time
Spectrum Analyzer	FSV30	R&S	100815	2016-12-16	2017-12-15
EMI Test Receiver	ESCI	R&S	100948	2016-06-01	2017-05-31
TRILOG Broadband Antenna	VULB 9163	Schwarzbeck	9163-201	2014-12-06	2017-12-05
Double Ridged Waveguide Horn Antenna	HF907	R&S	100126	2014-12-06	2017-12-05
Loop Antenna	FMZB1519	SCHWARZBECK	1519-047	2014-02-19	2017-02-18
Standard Gain Horn	3160-09	ETS-Lindgren	00102644	2015-01-30	2018-01-29
EMI Test Receiver	ESCS30	R&S	100138	2016-12-16	2017-12-15
LISN	ENV216	R&S	101171	2016-12-17	2019-12-16
Spectrum Analyzer	N9010A	Agilent	MY47191109	2016-05-21	2017-05-20
MOB COMMS DC SUPPLY	66319D	Agilent	MY43004105	2016-05-21	2017-05-20
Peak Power Meter	U2021XA	Keysight	MY55240003	2016-06-26	2017-06-25
RF Cable	SMA 15cm	Agilent	0001	2016-11-04	2017-02-03

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side



Back Side

a: EUT




b: Adapter

Picture 1 EUT and Accessory

A.2 Test Setup




30M Hz-1GHz

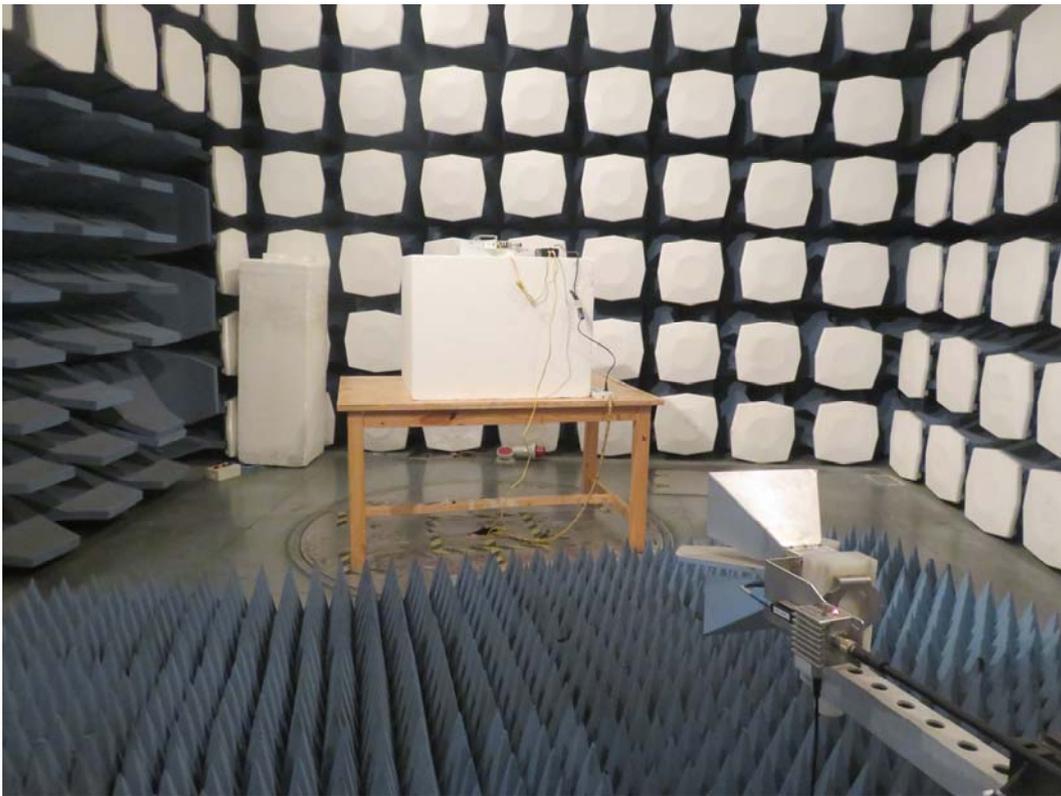

Above 1GHz

Picture 2 Radiated Emission Test Setup

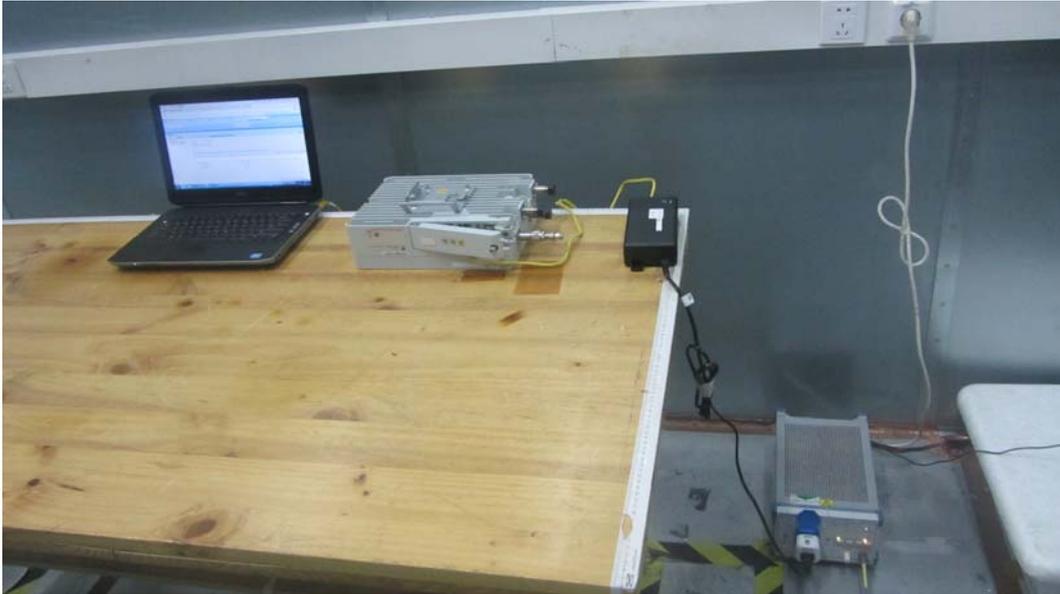

Picture 3 Conducted Emission Test Setup