



NO.: RZA2009-0069FCC



# OET 65

# TEST REPORT

<b>Test name</b>	Electromagnetic Field (Specific Absorption Rate)
<b>Product</b>	EVDO Rev.A USB Stick
<b>Model</b>	HUAWEI EC1260
<b>FCC ID</b>	QISEC1260
<b>Client</b>	HUAWEI Technologies Co., Ltd.

**TA Technology (Shanghai) Co., Ltd.**



**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2009-0069FCC

Page 2 of 100

---

**GENERAL TERMS**

1. The test report is invalid if not marked with “exclusive stamp for the data report” or the stamp of the TA.
2. Any copy of the test report is invalid if not re-marked with the “exclusive stamp for the test report” or the stamp of TA.
3. The test report is invalid if not marked with the stamps or the signatures of the persons responsible for performing, revising and approving the test report.
4. The test report is invalid if there is any evidence of erasure and/or falsification.
5. If there is any dissidence for the test report, please file objection to the test center with in 15 days from the date of receiving the test report.
6. Normally, entrust test is only responsible for the samples that have undergone the test.
7. This test report cannot be used partially or in full for publicity and/or promotional purposes with out previous written permissions of TA.

**Address:** Room4, No.399, Cailun Rd, Zhangjiang Hi-Tech Park, Pudong Shanghai, China

**Post code:** 201203

**Telephone:** +86-021-50791141/2/3

**Fax:** +86-021-50791141/2/3-8000

**Website:** <http://www.ta-shanghai.com>

**E-mail:** [service@ta-shanghai.com](mailto:service@ta-shanghai.com)

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2009-0069FCC

Page 3of 100

**GENERAL SUMMARY**

<b>Product</b>	EVDO Rev.A USB Stick	<b>Model</b>	HUAWEI EC1260
<b>Client</b>	HUAWEI Technologies Co., Ltd.	<b>Type of test</b>	Entrusted
<b>Manufacturer</b>	HUAWEI Technologies Co., Ltd.	<b>Arrival Date of sample</b>	February 2 <sup>nd</sup> , 2009
<b>Place of sampling</b>	(Blank)	<b>Carrier of the samples</b>	Ting Zhang
<b>Quantity of the samples</b>	One	<b>Date of product</b>	(Blank)
<b>Base of the samples</b>	(Blank)	<b>Items of test</b>	SAR
<b>S/N</b>	Z42AA108C2000206		
<b>Standard(s)</b>	<p><b>ANSI C95.1-2005:</b> IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.</p> <p><b>OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:</b> Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.</p> <p><b>IEC 62209-2(draft)-2008:</b> Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR)for wireless communication devices used in close proximity to the human body .( frequency rang of 30MHz to 6GHz )</p>		
<b>Conclusion</b>	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.</p> <p>General Judgment: <b>Pass</b></p> <p style="text-align: right;">(Stamp) <b>Date of issue: February 11<sup>th</sup>, 2009</b></p>		
<b>Comment</b>	The test result only responds to the measured sample.		

Approved by



Weizhong Yang

Revised by



Minbao Ling

Performed by



Jinchang Li

## TABLE OF CONTENT

1.	COMPETENCE AND WARRANTIES .....	6
2.	GENERAL CONDITIONS .....	6
3.	DESCRIPTION OF EUT .....	7
3.1.	ADDRESSING INFORMATION RELATED TO EUT .....	7
3.2.	CONSTITUENTS OF EUT .....	7
3.3.	GENERAL DESCRIPTION .....	8
3.4.	TEST ITEM .....	8
4.	OPERATIONAL CONDITIONS DURING TEST .....	9
4.1.	GENERAL DESCRIPTION OF TEST PROCEDURES .....	9
4.2.	INFORMATION FOR THE MEASUREMENT OF CDMA 1xRTT DEVICES .....	9
4.2.1.	<i>Output Power Verification for 1xRTT</i> .....	9
4.2.2.	<i>Body SAR measurement</i> .....	9
4.3.	INFORMATION FOR THE MEASUREMENT OF CDMA 1x EV-DO DEVICES .....	10
4.3.1.	<i>Output Power Verification for EV-DO</i> .....	10
4.3.2.	<i>SAR measurement</i> .....	10
4.4.	POSITION OF MODULE IN PORTABLE DEVICES .....	11
4.5.	PICTURE OF HOST PRODUCT .....	12
5.	SAR MEASUREMENTS SYSTEM CONFIGURATION .....	13
5.1.	SAR MEASUREMENT SET-UP .....	13
5.2.	DASY4 E-FIELD PROBE SYSTEM .....	14
5.2.1.	<i>EX3DV4 Probe Specification</i> .....	14
5.2.2.	<i>E-field Probe Calibration</i> .....	15
5.3.	OTHER TEST EQUIPMENT .....	15
5.3.1.	<i>Device Holder for Transmitters</i> .....	15
5.3.2.	<i>Phantom</i> .....	16
5.4.	SCANNING PROCEDURE .....	16
5.5.	DATA STORAGE AND EVALUATION .....	18
5.5.1.	<i>Data Storage</i> .....	18
5.5.2.	<i>Data Evaluation by SEMCAD</i> .....	18
5.6.	SYSTEM CHECK .....	21
5.7.	EQUIVALENT TISSUES .....	22
6.	LABORATORY ENVIRONMENT .....	22
7.	CHARACTERISTICS OF THE TEST .....	23
7.1.	APPLICABLE LIMIT REGULATIONS .....	23
7.2.	APPLICABLE MEASUREMENT STANDARDS .....	23
8.	CONDUCTED OUTPUT POWER MEASUREMENT .....	24
8.1.	SUMMARY .....	24
8.2.	CONDUCTED POWER .....	24
8.2.1.	<i>Measurement Methods</i> .....	24
8.2.2.	<i>Measurement result</i> .....	24
9.	TEST RESULTS .....	25
9.1.	DIELECTRIC PERFORMANCE .....	25

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2009-0069FCC

Page 5 of 100

---

9.2.	SYSTEM CHECK.....	25
9.3.	SUMMARY OF MEASUREMENT RESULTS .....	26
9.4.	CONCLUSION .....	28
10.	MEASUREMENT UNCERTAINTY .....	29
11.	MAIN TEST INSTRUMENTS.....	30
12.	TEST PERIOD.....	30
13.	TEST LOCATION.....	30
ANNEX A:	TEST LAYOUT .....	31
ANNEX B:	SYSTEM VALIDATION RESULTS.....	32
ANNEX C:	GRAPH RESULTS.....	34
ANNEX D:	PROBE CALIBRATION CERTIFICATE.....	76
ANNEX E:	D835V2 DIPOLE CALIBRATION CERTIFICATE .....	85
ANNEX F:	DAE4 CALIBRATION CERTIFICATE.....	94
ANNEX G:	EUT Test Configuration .....	99

## **1. COMPETENCE AND WARRANTIES**

**TA Technology (Shanghai) Co., Ltd.** is a test laboratory competent to carry out the tests described in this test report.

**TA Technology (Shanghai) Co., Ltd.** guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at TA Technology (Shanghai) Co., Ltd. at the time of execution of the test.

**TA Technology (Shanghai) Co., Ltd.** is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

## **2. GENERAL CONDITIONS**

This report only refers to the item that has undergone the test.

This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities. This document is only valid if complete; no partial reproduction can be made without written approval of **TA Technology (Shanghai) Co., Ltd.**

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of **TA Technology (Shanghai) Co., Ltd.** and the Accreditation Bodies, if it applies.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2009-0069FCC

Page 7 of 100

### 3. DESCRIPTION OF EUT

#### 3.1. Addressing Information Related to EUT

**Table 1: Applicant (The Client)**

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

**Table 2: Manufacturer**

Name or Company	Huawei Technologies Co., Ltd.
Address/Post	Bantian, Longgang District
City	Shenzhen
Postal Code	518129
Country	P.R. China
Telephone	0755-28780808
Fax	0755-28780808

#### 3.2. Constituents of EUT

**Table 3: Constituents of Samples**

Description	Model	Serial Number	Manufacturer
EVDO Rev.A USB Stick	HUAWEI EC1260	Z42AA108C2000206	Huawei Technologies Co.,Ltd.

Note:

The EUT appearances see ANNEX G.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

No. RZA2009-0069FCC

Page 8 of 100

### 3.3. General Description

Equipment Under Test (EUT) is a EV-DO Rev.A USB Stick. SAR is tested for the EUT CDMA Cellular.

Since the EUT only has the data transfer function, but does not have the speech transfer function, the tests in the band of CDMA Cellular are only performed in the mode of data transfer function.

The measurements were performed in combination with a host product (IBM T61). IBM T61 laptop have horizontal USB slot and vertical USB slot.

The sample under test was selected by the Client.

Components list please refer to documents of the manufacturer.

### 3.4. Test item

**Table 4: Test item of EUT**

Device type :	portable device	
Exposure category:	uncontrolled environment / general population	
Device operating configurations :		
Operating mode(s):	CDMA Cellular (tested)	
Operating frequency range(s)	transmitter frequency range	receiver frequency range
CDMA Cellular:	824.7 MHz ~ 848.31 MHz	869.7 MHz ~ 893.31MHz
Power class	CDMA Cellular:, tested with maximum output power	
Test channel (Low –Middle –High)	1013 -384 – 777 (CDMA Cellular) (tested)	
hardware version:	CE64TCPU	
software version:	11.002.04.00.00	
Antenna type:	integrated antenna	

## 4. OPERATIONAL CONDITIONS DURING TEST

### 4.1. General description of test procedures

Connection to the EUT is established via air interface with E5515C, and the EUT is set to maximum output power by E5515C. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the EUT. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the EUT by at least 30 dB.

The device that connected to a host computer must be tested with the device position for all applicable orientations. Because of laptop design the EC1260 USB stick was test in orientation 2 with a 19cm USB cable. The measurements were performed in combination with a host computer (IBM T61) .

### 4.2. Information for the measurement of CDMA 1xRTT devices

#### 4.2.1. Output Power Verification for 1xRTT

Test Parameter setup for maximum RF output power according to section 4.4.5 of 3GPP2

Parameter	Units	Value
I or	dBm/1.23MHz	-104
PilotE c /I or	dB	-7
TrafficE c /I or	dB	-7.4

For SAR test, the maximum power output is very important and essential; it is identical under the measurement uncertainty. It is proper to use typical Test Mode 3 (FW RC3, RVS RC3, SO55) as the worst case for SAR test.

Under the loop back mode between mobile station and E5515C, the transmitter continuously emits with maximum power more strong than voice mode, so the SAR test was done with loop back mode. To make the mobile emits maximum power; the output power of E5515C would be adjusted to minimum power with the sensitivity of the mobile station to build steady connection with mobile station. The power level control parameter “all up” and it means that requires mobile station to emit with maximum power.

#### 4.2.2. Body SAR measurement

SAR is measured in RC3 with the EUT configured to transmit at full rate using TDSO/SO32 transmit at full rate on FCH with all other code channels disabled. SAR for multiple code channels (FCH+SCHn) is not required when the maximum average output of each RF channel is less than 0.25dB higher than measured with FCH only.

Body SAR in RC1 is not required because the maximum average output of each channel is less than 0.25 dB higher than that measured in RC3. Otherwise, SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate using the body exposure configuration that results in the highest SAR for that channel in RC3.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

No. RZA2009-0069FCC

Page 10 of 100

Test communication setup meet as followings:

Communication standard between mobile station and base station simulator	3GPP2 C.S0011-B
Radio configuration	RC3 (Supporting CDMA 1X)
Spreading Rate	SR1
Data Rate	9600bps
Service Options	SO55 (Test loop back mode 1)
Service Options	SO32 (Test Data service mode)
Multiplex Options	The mobile station does not support this service.

### 4.3. Information for the measurement of CDMA 1x EV-DO devices

#### 4.3.1. Output Power Verification for EV-DO

Maximum output power is verified on the High, Middle, Low channel according to procedures in section 3.1.1.3.4 of 3GPP2 C.S0033-0/TIA-866 for Rev.0 and section 4.3.4 of 3GPP2 C.S0033-A for Rev. A. For Rev. A, maximum output power for both Subtype 0/1 and Subtype 2 Physical Layer configurations should be measured.

#### 4.3.2. SAR measurement

SAR is measured using FTAP/RTAP and FETAP/RETAP respectively for Rev.0 and Rev. A devices. The AT is tested with a Reverse Data Channel rate of 153.6kbps IN Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations. Both FTAP and FETAP are configured with a Forward Traffic Channel data rate corresponding to the 2-slot version of 307.2kbps with the ACK Channel transmitting in all slots. AT power control should be in "All Bits Up" conditions for TAP/ETAP.

Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev.0. SAR for Subtype 2 Physical Layer configurations is not required for Rev. A when the maximum average output of each RF channels is less than that measured in Subtype 0/1 Physical Layer configurations. Otherwise, SAR is measured on the maximum output channel for Rev. A using the exposure configuration that results in the highest SAR for that RF channels in Rev.0<sup>14</sup>.

For Ev-Do devices that also support 1x RTT voice and/or data operations, SAR is not required for 1x RTT when the maximum average output of each channel is less than ¼ dB higher than that measured in Subtype 0/1 Physical Layer configurations for Rev. 0. Otherwise, the 'Body SAR Measurements' procedures in the 'CDMA-2000 1x Handsets' section should be applied.

#### **4.4. Position of module in Portable devices**

The measurements were performed in combination with a host product (IBM T61).

For each channel, the EUT is tested at the following 5 test positions:

- Test Position 1: The EUT is connected to the portable computer with horizontal USB slot. The back side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-a)
- Test Position 2: The EUT is connected to the portable computer through a 19cm USB cable. The front side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-b)
- Test Position 3: The EUT is connected to the portable computer with vertical USB slot. The left side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-c)
- Test Position 4: The EUT is connected to the portable computer with vertical USB slot. The right side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-d)
- Test Position 5: The EUT is connected to the portable computer with horizontal USB slot. The top side of the EUT towards the bottom of the flat phantom. (ANNEX G Picture 5-e)

#### 4.5. Picture of host product

During the test, IBM T61 laptop was used as an assistant to help to setup communication. (See Picture 1)



Picture 1-a: IBM T61 Close



Picture 1-b: IBM T61 Open



Picture 1-c: IBM T61 with horizontal USB slot



Picture 1-d: IBM T61 with Vertical USB slot



Picture 1-e: a 19cm USB cable

**Picture 1: Computer as a test assistant**

## 5. SAR MEASUREMENTS SYSTEM CONFIGURATION

### 5.1. SAR Measurement Set-up

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY4 measurement server.
- The DASY4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003
- DASY4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

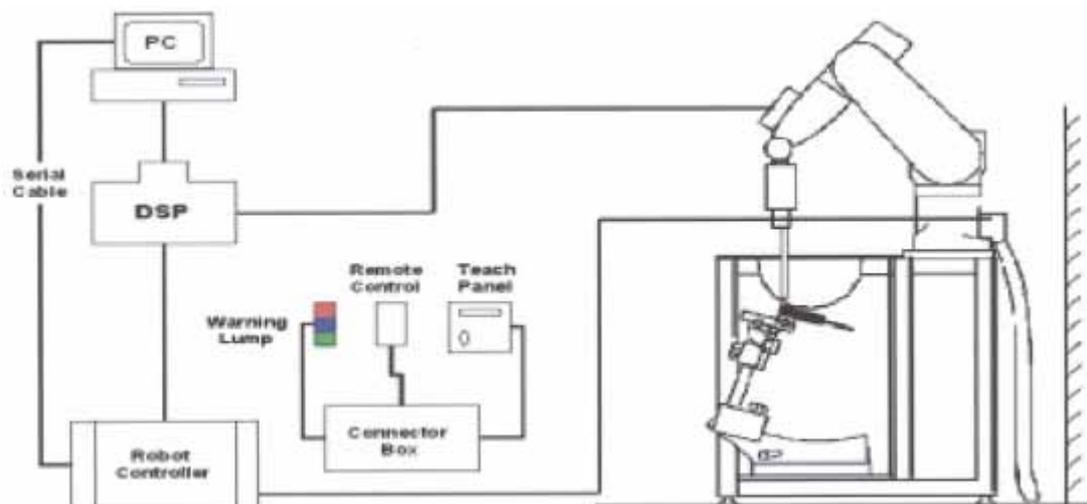


Figure 1. SAR Lab Test Measurement Set-up

## 5.2. Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

### 5.2.1. EX3DV4 Probe Specification

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Basic Broad Band Calibration in air Conversion Factors (CF) for HSL 900 and HSL 1750 Additional CF for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



**Figure 2. EX3DV4 E-field Probe**



**Figure 3. EX3DV4 E-field probe**

### 5.2.2. E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy was evaluated and found to be better than  $\pm 0.25\text{dB}$ . The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

Where:  $\Delta t$  = Exposure time (30 seconds),  
C = Heat capacity of tissue (brain or muscle),  
 $\Delta T$  = Temperature increase due to RF exposure.  
Or

$$\text{SAR} = \frac{|E|^2 \sigma}{\rho}$$

Where:  
 $\sigma$  = Simulated tissue conductivity,  
 $\rho$  = Tissue density (kg/m<sup>3</sup>).

## 5.3. Other Test Equipment

### 5.3.1. Device Holder for Transmitters

The DASY device holder is designed to cope with the die rent positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\tan \delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the



**Figure 4. Device Holder**

inference of the clamp on the test results could thus be lowered.

### 5.3.2. Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden Figure. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special



**Figure 5. Generic Twin Phantom**

### 5.4. Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. ± 5 %.
- The "surface check" measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1mm). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within ± 30°.)
- Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged.

After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

- **Zoom Scan**

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x7 points within a cube whose base is centered around the maxima found in the preceding area scan.

- **Spatial Peak Detection**

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY4 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

## 5.5. Data Storage and Evaluation

### 5.5.1. Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.5.2. Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	Dcp <sub>i</sub>
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal,

the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$U_i$  = input signal of channel i (i = x, y, z)

$cf$  = crest factor of exciting field (DASY parameter)

$dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: 
$$E_i = ( V_i / Norm_i \cdot ConvF )^{1/2}$$

H-field probes: 
$$H_i = ( V_i )^{1/2} \cdot ( a_{i0} + a_{i1} f + a_{i2} f^2 ) / f$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

$Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
[mV/(V/m)<sup>2</sup>] for E-field Probes

$ConvF$  = sensitivity enhancement in solution

$a_{ij}$  = sensor sensitivity factors for H-field probes

$f$  = carrier frequency [GHz]

$E_i$  = electric field strength of channel i in V/m

$H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = ( E_{tot}^2 \cdot \sigma ) / ( \rho \cdot 1000 )$$

with **SAR** = local specific absorption rate in mW/g

**$E_{tot}$**  = total field strength in V/m

**$\sigma$**  = conductivity in [mho/m] or [Siemens/m]

**$\rho$**  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  **$P_{pwe}$**  = equivalent power density of a plane wave in mW/cm<sup>2</sup>

**$E_{tot}$**  = total electric field strength in V/m

**$H_{tot}$**  = total magnetic field strength in A/m

## 5.6. System check

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system check results (dielectric parameters and SAR values) are given in the table 16.

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ( $\pm 10\%$ ).

System check is performed regularly on all frequency bands where tests are performed with the DASY 4 system.

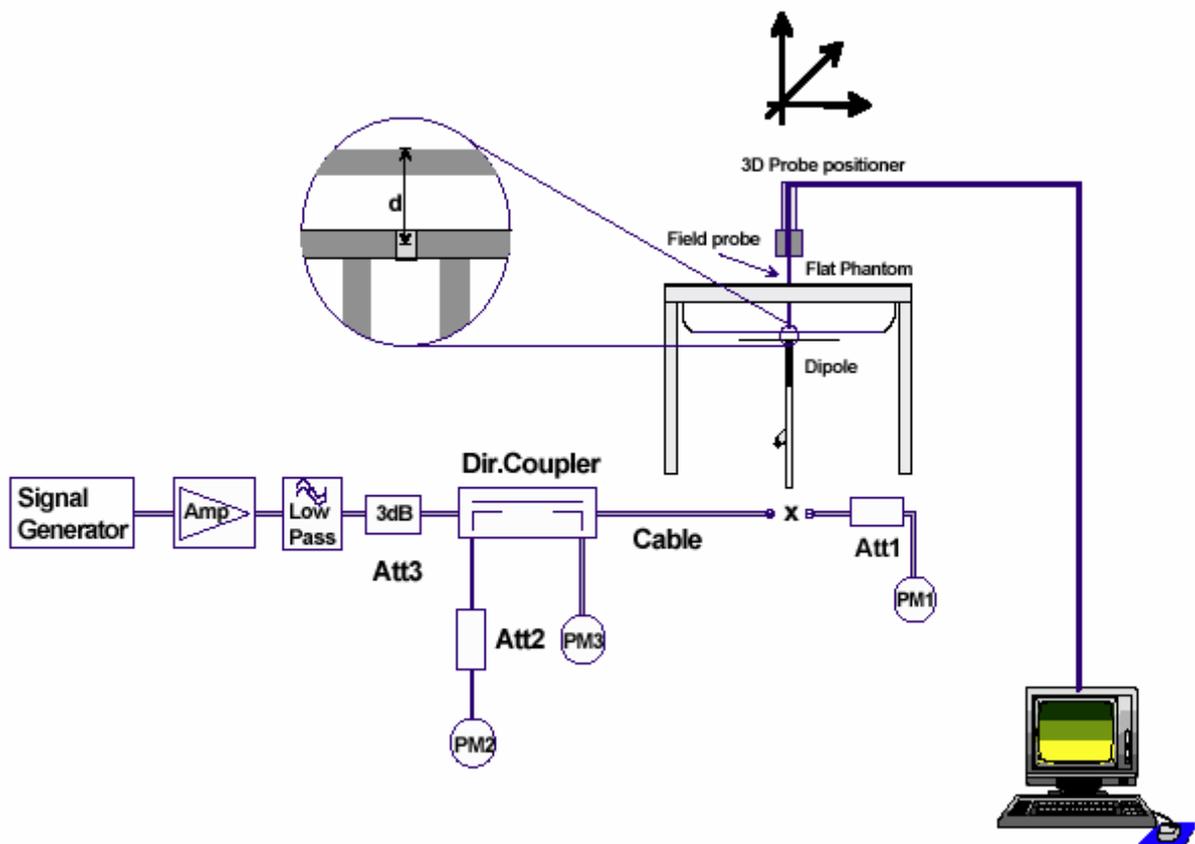


Figure 6. System check Set-up

### 5.7. Equivalent Tissues

The liquid is consisted of water, sugar, salt, Glycol, Preventol and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 5 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the OET 65.

**Table 5: Composition of the Body Tissue Equivalent Matter**

MIXTURE%	FREQUENCY (Body)835MHz
Water	52.5
Sugar	45
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

## 6. LABORATORY ENVIRONMENT

**Table 6: The Ambient Conditions during Test**

Temperature	Min. = 20°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 $\Omega$
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

## **7. CHARACTERISTICS OF THE TEST**

### **7.1. Applicable Limit Regulations**

**ANSI C95.1–2005:** IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

### **7.2. Applicable Measurement Standards**

**OET Bulletin 65 supplement C, published June 2001 including DA 02-1438, published June 2002:** Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. Transition Period for the Phantom Requirements of Supplement C to OET Bulletin 65.

**IEC 62209-2(draft)-2008:** Human exposure to radio frequency fields from handheld and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 2: Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body .( frequency rang of 30MHz to 6GHz )

## 8. CONDUCTED OUTPUT POWER MEASUREMENT

### 8.1. Summary

The DUT is tested using an E5515C communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power. Conducted output power was measured using an integrated RF connector and attached RF cable. This result contains conducted output power for the EUT.

### 8.2. Conducted Power

#### 8.2.1. Measurement Methods

The EUT was set up for the maximum output power. The channel power was measured.

#### 8.2.2. Measurement result

**Table 7: Conducted Power Measurement Results**

CDMA Cellular(RC1)	Conducted Power(dBm)		
	Channel 1013	Channel 384	Channel 777
Before Test	24.10	23.99	23.86
After Test	24.11	23.97	23.85
CDMA Cellular(RC3)	Conducted Power(dBm)		
	Channel 1013	Channel 384	Channel 777
Before Test	23.99	23.91	23.82
After Test	23.98	23.92	23.81
CDMA Cellular + EV-DO (Subtype0/1)	Conducted Power(dBm)		
	Channel 1013	Channel 384	Channel 777
Before Test	24.36	24.41	24.37
After Test	24.33	24.40	24.35
CDMA Cellular + EV-DO (Subtype2)	Conducted Power(dBm)		
	Channel 1013	Channel 384	Channel 777
Before Test	24.34	24.35	24.33
After Test	24.33	24.35	24.31

## 9. TEST RESULTS

### 9.1. Dielectric Performance

**Table 8: Dielectric Performance of Body Tissue Simulating Liquid**

Frequency	Description	Dielectric Parameters		Temp
		$\epsilon_r$	$\sigma(\text{s/m})$	
835MHz (body)	Target value $\pm 5\%$ window	55.2 52.44 — 57.96	0.97 0.92 — 1.02	/
	Measurement value 2009-2-5	55.14	0.99	22.4

### 9.2. System check

**Table 9: System Check for Head tissue stimulant**

Frequency	Description	SAR(W/kg)		Dielectric Parameters		Temp
		10g	1g	$\epsilon_r$	$\sigma(\text{s/m})$	
835MHz	Recommended result $\pm 10\%$ window	1.52 1.44—1.60	2.3 2.19 — 2.42	40.9	0.89	/
	Measurement value 2009-2-5	1.5	2.3	40.73	0.89	21.9

Note:

1. Recommended Values used derive from the SPEAG calibration certificate and 250 mW is used as feeding power to the calibrated dipole (SPEAG using).
2. The graph results see ANNEX B.

# TA Technology (Shanghai) Co., Ltd.

## Test Report

### 9.3. Summary of Measurement Results

**Table 10: SAR Values (CDMA Cellular, distance 5mm)**

Liquid Temperature: 22.4					
Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift(dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average		
IBM T61					
Test Position 1	High	0.619	0.959	-0.165	Figure 9
	Middle	<b>0.650</b>	<b>0.998</b>	-0.152	Figure 11
	Low	0.628	0.967	0.086	Figure 13
Test Position 2	High	0.469	0.748	-0.130	Figure 15
	Middle	0.508	0.830	0.103	Figure 17
	Low	0.542	0.857	0.059	Figure 19
Test Position 3	High	0.541	0.859	-0.149	Figure 21
	Middle	0.621	0.983	-0.021	Figure 23
	Low	0.544	0.861	-0.113	Figure 25
Test Position 4	Middle	0.488	0.755	-0.143	Figure 27
Test Position 5	Middle	0.082	0.247	0.039	Figure 29

Note: 1. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

2. Upper and lower frequencies were measured at the worst position.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 11: SAR Values [CDMA Cellular EV-DO, distance 5mm]**

Liquid Temperature: 22.4					
Limit of SAR (W/kg)		10 g Average	1g Average	Power Drift(dB)	Graph Results
		2.0	1.6	± 0.21	
Test Case Of Body		Measurement Result (W/kg)		Power Drift(dB)	
Different Test Position	Channel	10 g Average	1 g Average		
IBM T61 (Rev.0)					
Test Position 1	High	0.578	0.882	0.095	Figure 31
	Middle	0.642	0.982	-0.014	Figure 33
	Low	0.609	0.918	-0.070	Figure 35
Test Position 2	Middle	0.494	0.794	0.067	Figure 37
Test Position 3	High	0.573	0.918	0.044	Figure 39
	Middle	<b>0.678</b>	<b>1.080</b>	-0.014	Figure 41
	Low	0.602	0.955	0.041	Figure 43
Test Position 4	Middle	0.479	0.738	0.025	Figure 45
Test Position 5	Middle	0.083	0.244	-0.161	Figure 47
Worst case of Rev.0 with Rev.A					
Test Position 3	Middle	<b>0.680</b>	<b>1.080</b>	0.193	Figure 49

Note: 1. The value with blue color is the maximum SAR Value of each test band.

2. The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.
3. Upper and lower frequencies were measured at the worst position.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

**Table 12: SAR Values (CDMA Cellular, IBM T61, enhanced energy coupling at increased separation distances)**

Different Test Position	Distance of EUT to Phantom	Channel	Measurement Result (W/kg)	50% of initial position SAR (W/kg)	125% of initial position SAR (W/kg)
Test Position 3	initial position	Middle	1.460	0.730	1.825
	5mm	Middle	0.883		
	10mm	Middle	0.554		

- Note: 1. The probe tip location is fixed at the distance of one half the probe tip diameter from the phantom surface.
2. when the device position with the highest point SAR is > 25% of that measured at the initial position, a complete 1-g SAR evaluation is required for this configuration.
3. A single point SAR is measured for each of these device positions until the SAR is less than 50% of that measured at the initial position.

**9.4. Conclusion**

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 7.2 of this report. Maximum localized SAR is 1.08W/kg that is below exposure limits specified in the relevant standards cited in Clause 7.1 of this test report.

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2009-0069FCC

Page 29 of 100

**10. MEASUREMENT UNCERTAINTY**

No.	a	Type	c	d	e=f(d, k)	f	h=c×f / e	k
	Uncertainty Component		Tol. (±%)	Prob. Dist	Div.	c <sub>1</sub> (1g)	1g u (± %)	v <sub>1</sub>
1	System repeitivity	A	0.5	N	1	1	0.5	9
Measurement system								
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial isotropy	B	4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	4.3	∞
4	Hemisphere Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{C_P}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
Test Sample Related								
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1
15	Output Power Variation-SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
Phantom and Tissue Parameters								
16	Phantom Uncertainty(shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity-measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity-deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity- measurement uncertainty	B	5.0	N	1	0.6	1.7	M
Combined Standard Uncertainty					RSS		11.25	
Expanded Uncertainty (95 % CONFIDENCE INTERVAL)					K=2		22.5	

**TA Technology (Shanghai) Co., Ltd.**  
**Test Report**

No. RZA2009-0069FCC

Page 30 of 100

## 11. MAIN TEST INSTRUMENTS

**Table 13: List of Main Instruments**

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	Agilent 8753E	US37390326	September 14, 2008	One year
02	Dielectric Probe Kit	Agilent 85070E	US44020115	No Calibration Requested	
03	Power meter	Agilent E4417A	GB41291714	March 14, 2008	One year
04	Power sensor	Agilent 8481H	MY41091316	March 14, 2008	One year
05	Signal Generator	HP 8341B	2730A00804	September 14, 2008	One year
06	Amplifier	IXA-020	0401	No Calibration Requested	
07	BTS	E5515C	GB46490218	September 14, 2008	One year
08	E-field Probe	EX3DV4	3660	September 3, 2008	One year
09	DAE	DAE4	452	November 18, 2008	One year
10	Validation Kit 835MHz	D835V2	4d020	July 21, 2008	One year

## 12. TEST PERIOD

The test is performed in February 5<sup>th</sup>, 2009.

## 13. TEST LOCATION


The test is performed at TA Technology (Shanghai) Co., Ltd.

**\*\*\*END OF REPORT BODY\*\*\***

**ANNEX A: TEST LAYOUT**



**Picture 2 Specific Absorption Rate Test Layout**

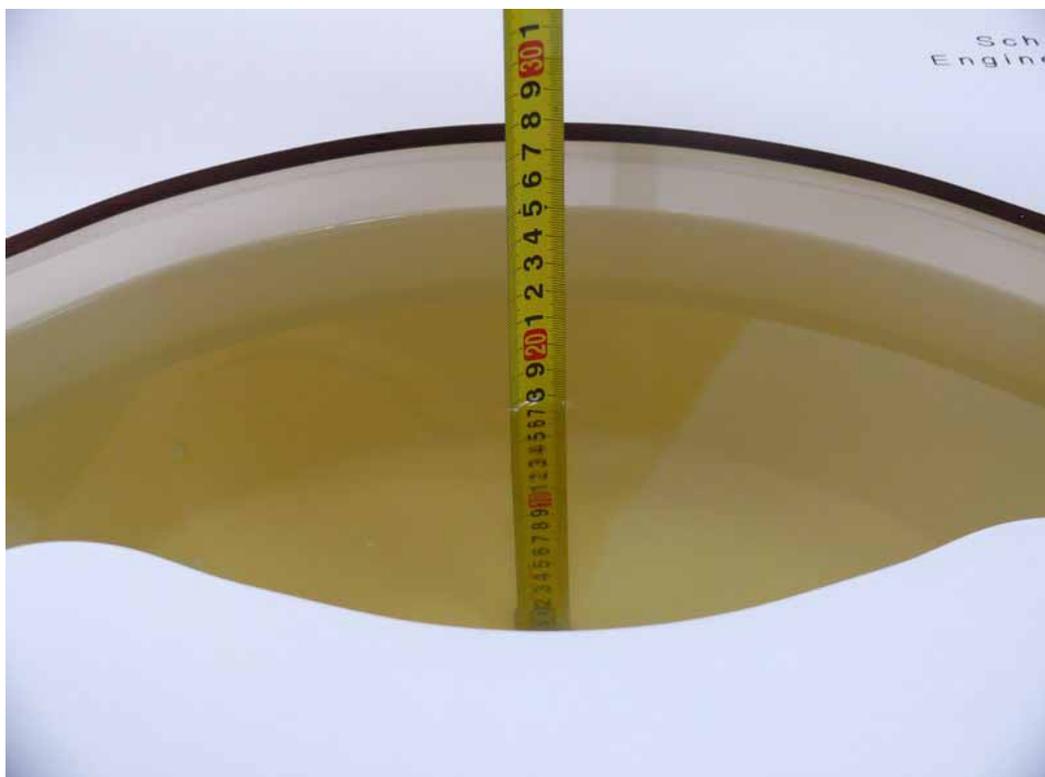

**Picture 3 Liquid depth in the Flat Phantom (835 MHz)**

## ANNEX B: SYSTEM VALIDATION RESULTS

Date/Time: 2/5/2009 8:06:11 AM

### System Performance Check at 835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d020

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.92 \text{ mho/m}$ ;  $\epsilon_r = 41.75$ ;  $\rho = 1000 \text{ kg/m}^3$

Probe: EX3DV4 - SN3660; ConvF(9.19, 9.19, 9.19);

Electronics: DAE4 Sn452;

**d=15mm, Pin=250mW/Area Scan (101x121x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.81 mW/g


**d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.8 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 3.50 W/kg

**SAR(1 g) = 2.3 mW/g; SAR(10 g) = 1.5 mW/g**

Maximum value of SAR (measured) = 2.83 mW/g

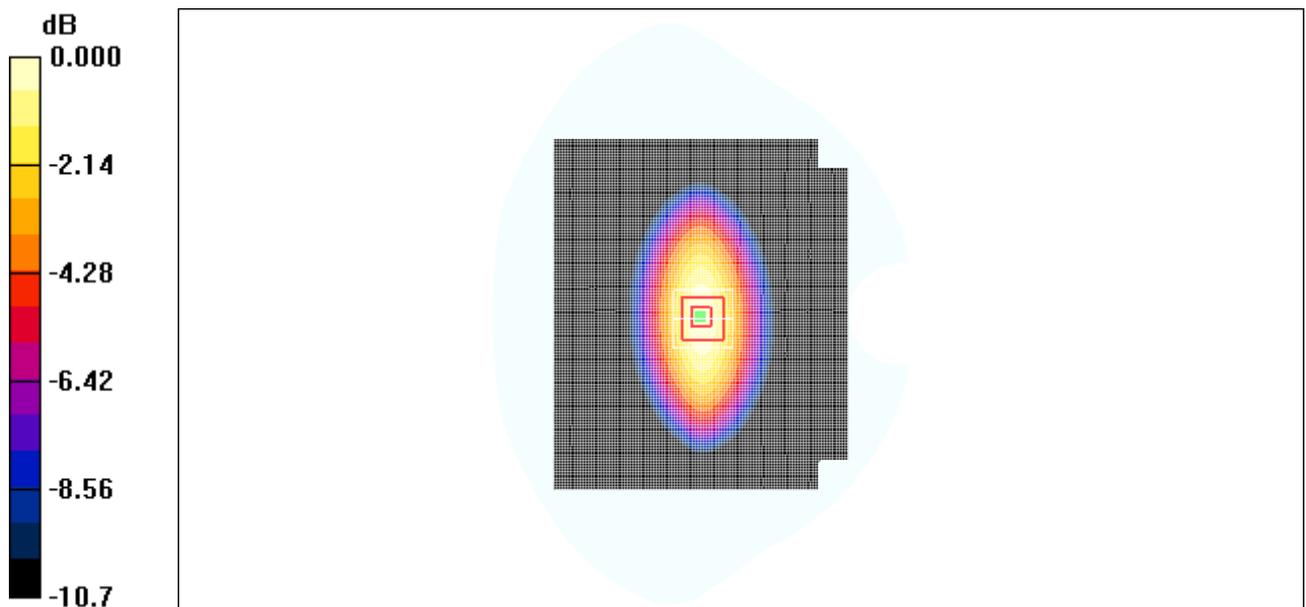

0 dB = 2.83mW/g

Figure 7 System Performance Check 835MHz 250mW

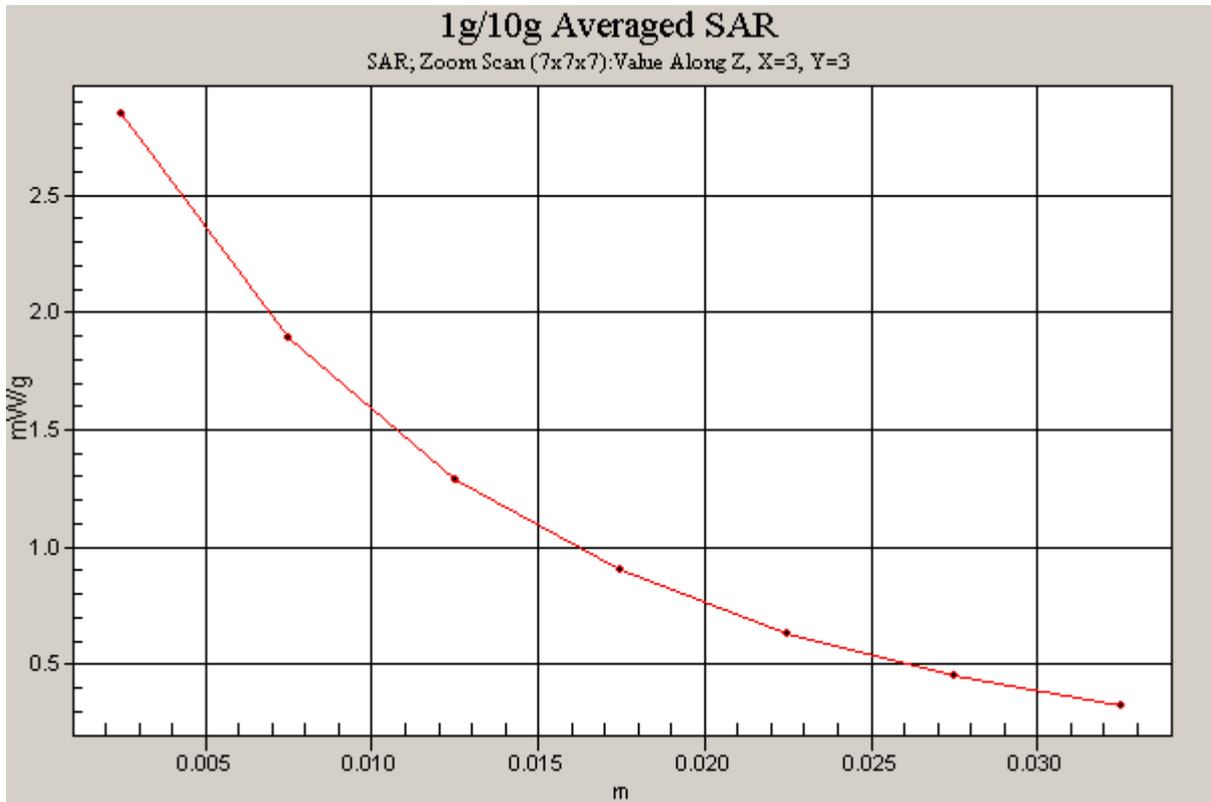


Figure 8 Z-Scan at power reference point (system validation at 835 MHz dipole)

## ANNEX C: GRAPH RESULTS

Date/Time: 2/5/2009 9:36:31 AM

### CDMA Cellular Test Position 1 High frequency

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 1 High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.14 mW/g

**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.3 V/m; Power Drift = -0.165 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.959 mW/g; SAR(10 g) = 0.619 mW/g**

Maximum value of SAR (measured) = 1.18 mW/g

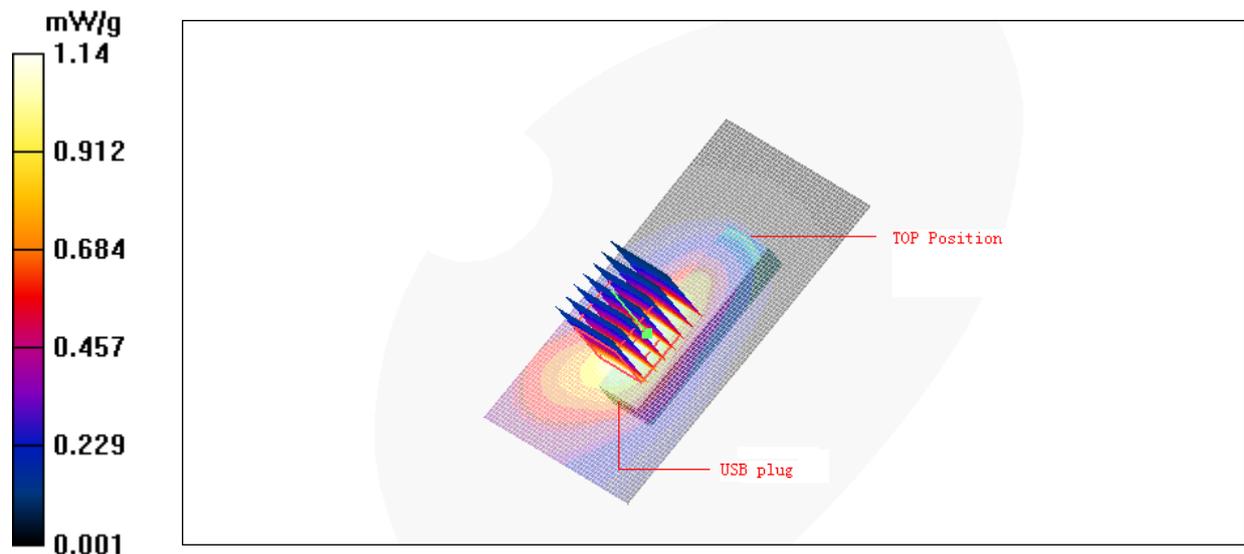


Figure 9 CDMA Cellular Test Position 1 Channel 777

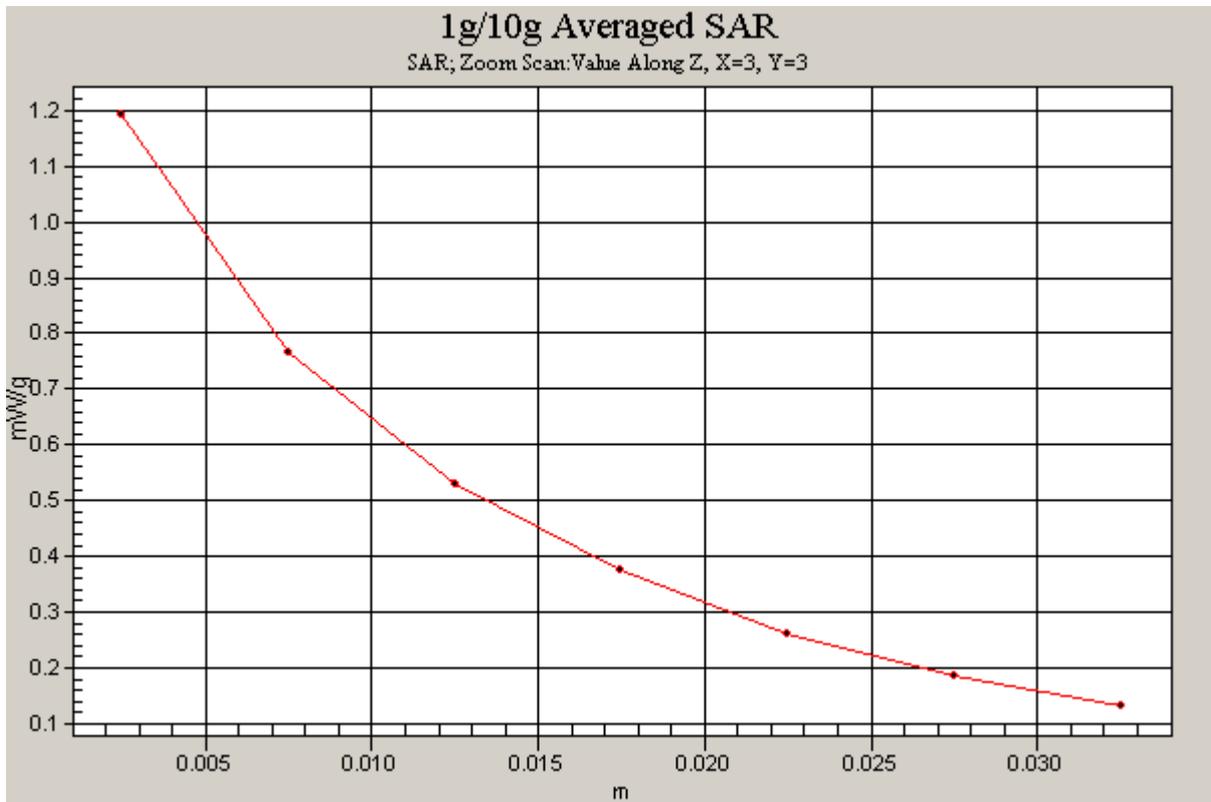


Figure 10 Z-Scan at power reference point (CDMA Cellular Test Position 1 Channel 777)

Date/Time: 2/5/2009 9:01:31 AM

### CDMA Cellular Test Position 1 Middle frequency

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 1 Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.22 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.2 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.998 mW/g; SAR(10 g) = 0.650 mW/g**

Maximum value of SAR (measured) = 1.22 mW/g

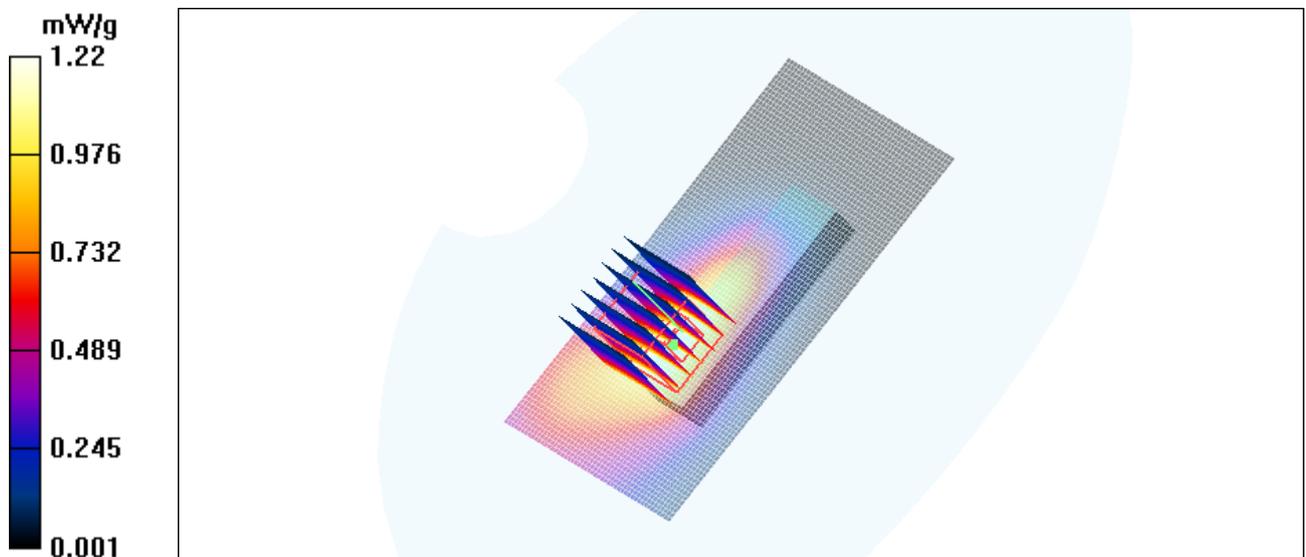


Figure 11 CDMA Cellular Test Position 1 Channel 384

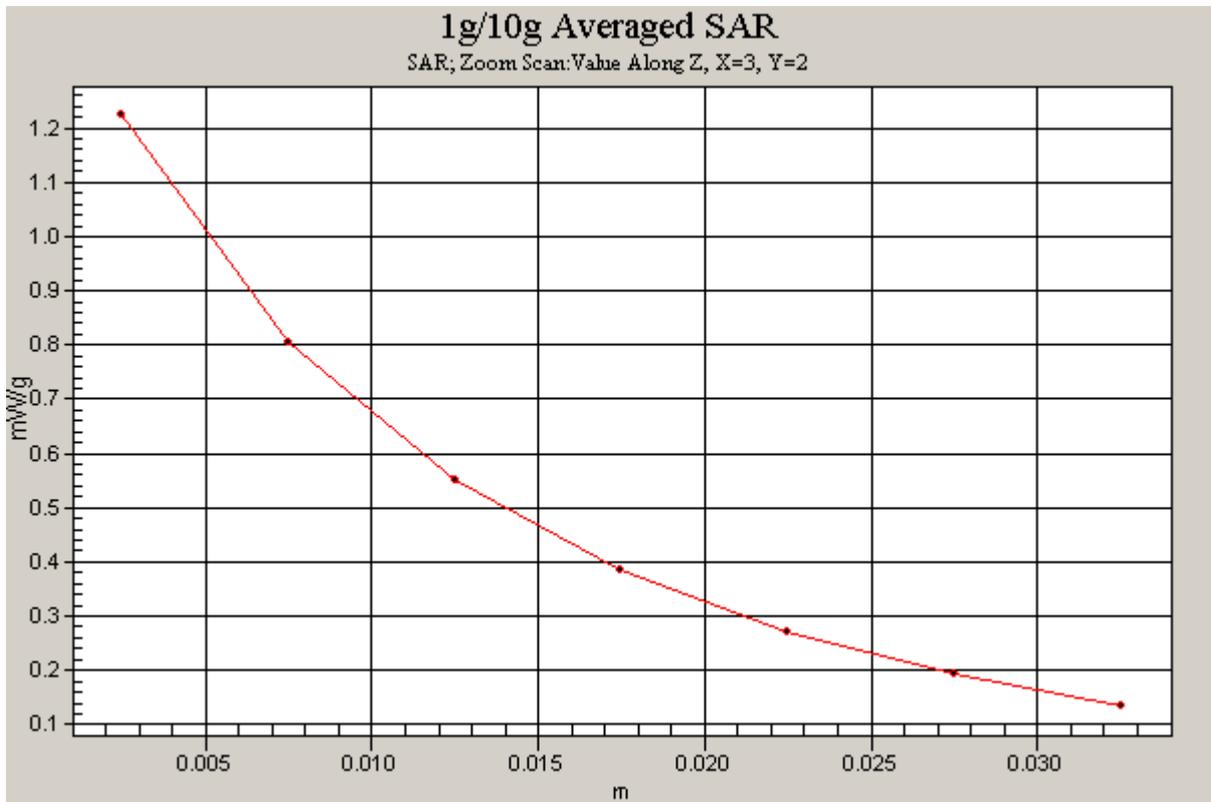


Figure 12 Z-Scan at power reference point (CDMA Cellular Test Position 1 Channel 384)

Date/Time: 2/5/2009 10:08:41 AM

**CDMA Cellular Test Position 1 Low frequency**

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 1 Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.0 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 1.54 W/kg

**SAR(1 g) = 0.967 mW/g; SAR(10 g) = 0.628 mW/g**

Maximum value of SAR (measured) = 1.19 mW/g

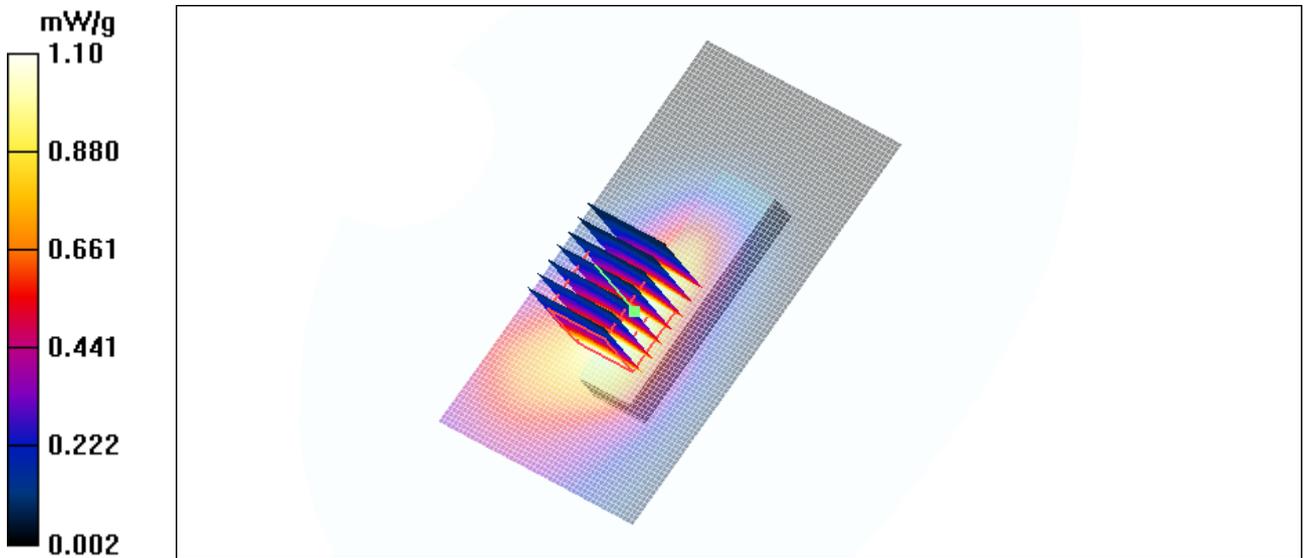


Figure 13 CDMA Cellular Test Position 1 Channel 1013

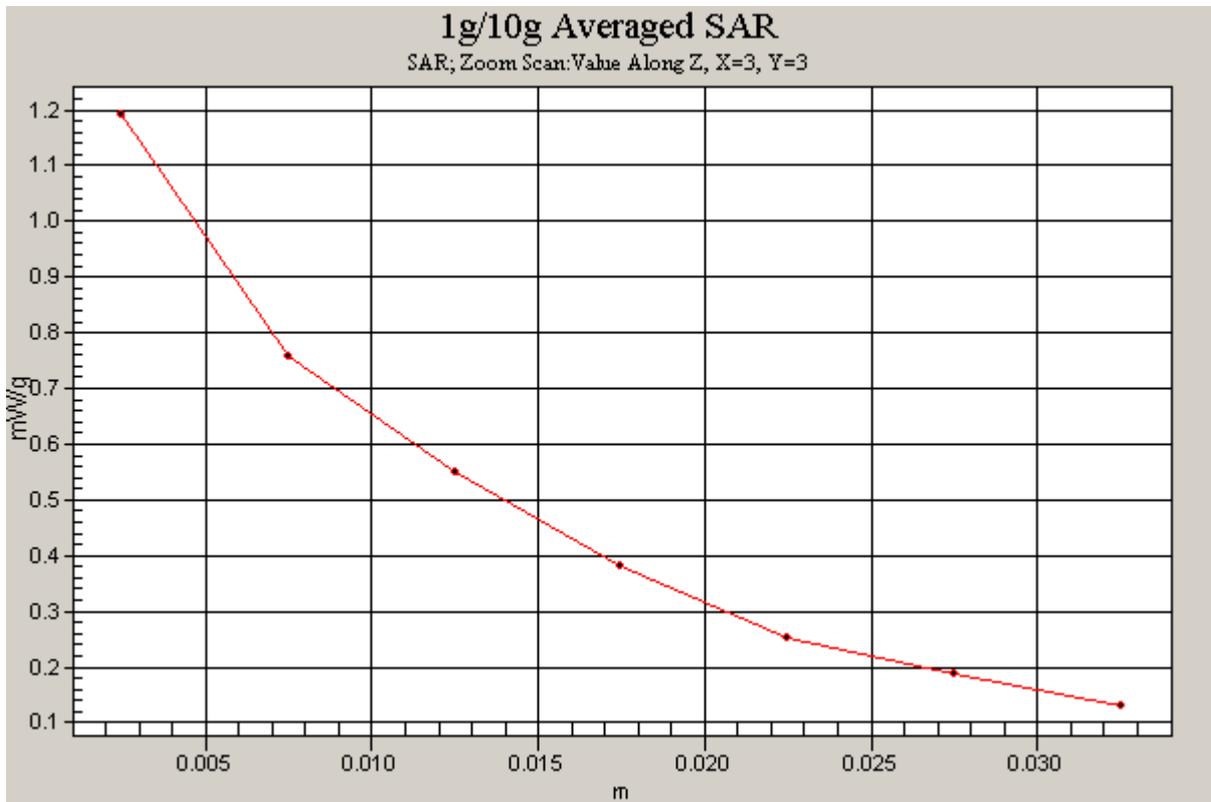


Figure 14 Z-Scan at power reference point (CDMA Cellular Test Position 1 Channel 1013)

Date/Time: 2/5/2009 11:07:42 AM

### CDMA Cellular Test Position 2 High frequency

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 2 High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.01 mW/g

**Test Position 2 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.6 V/m; Power Drift = -0.130 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.469 mW/g**

Maximum value of SAR (measured) = 0.916 mW/g

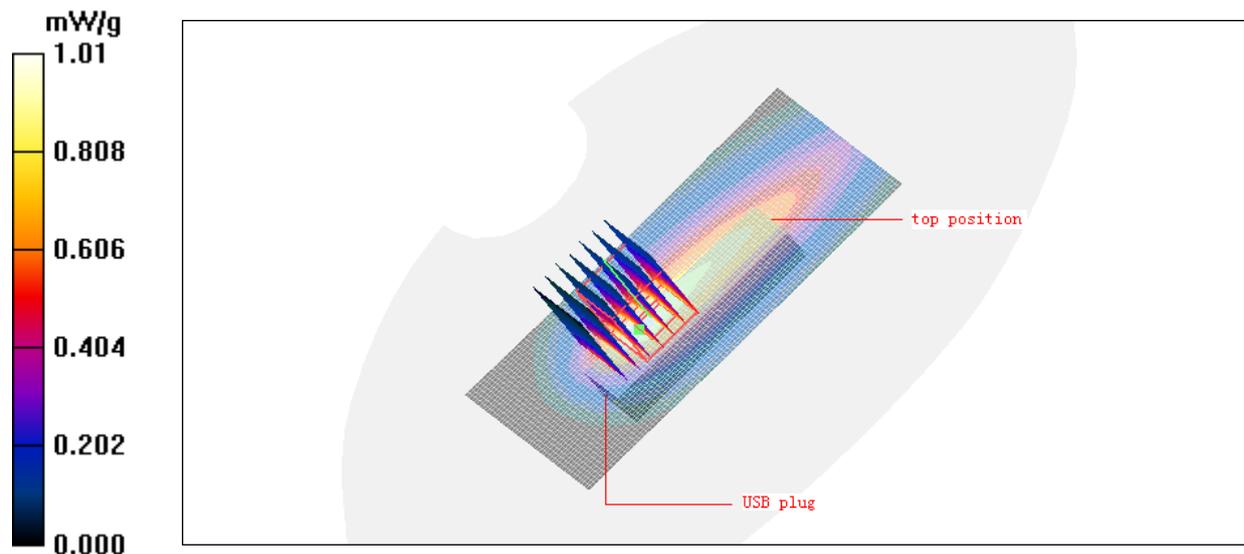


Figure 15 CDMA Cellular Test Position 2 Channel 777

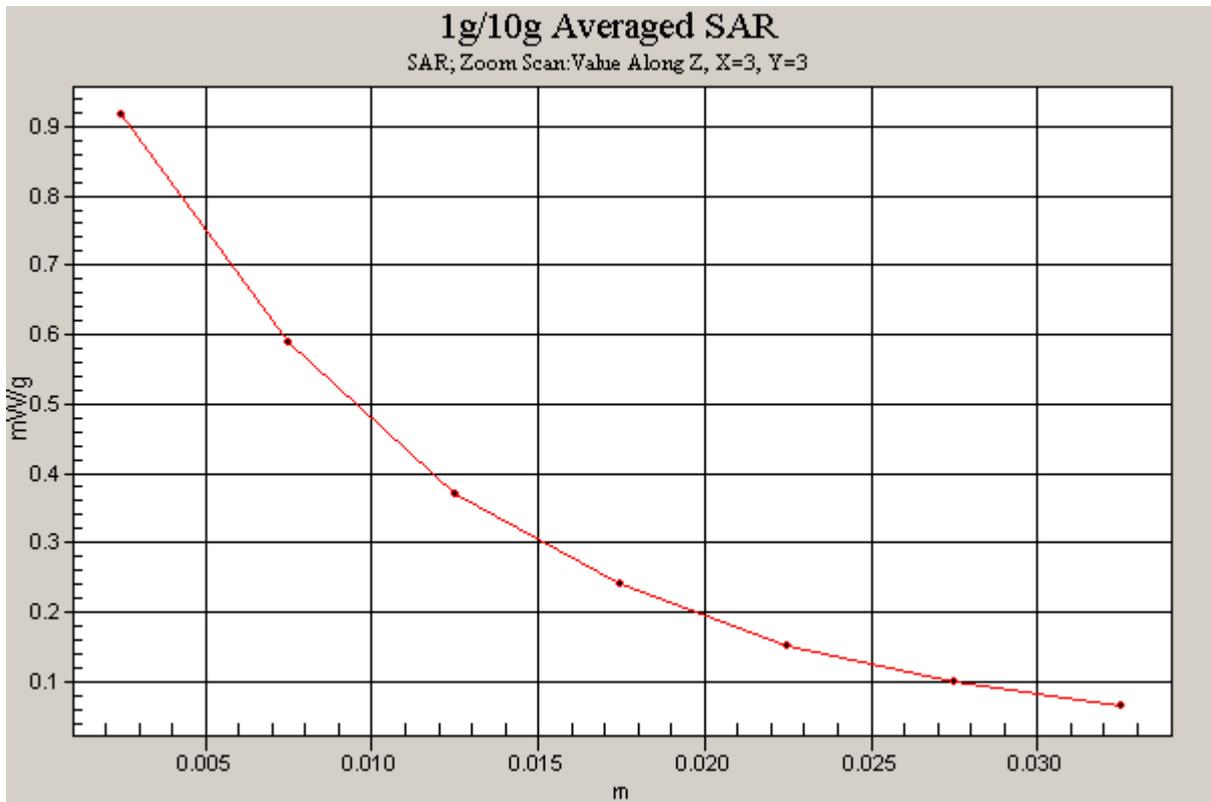


Figure 16 Z-Scan at power reference point (CDMA Cellular Test Position 2 Channel 777)

Date/Time: 2/5/2009 10:43:45 PM

**CDMA Cellular Test Position 2 Middle frequency**

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 2 Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.11 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.830 mW/g; SAR(10 g) = 0.508 mW/g**

Maximum value of SAR (measured) = 1.03 mW/g

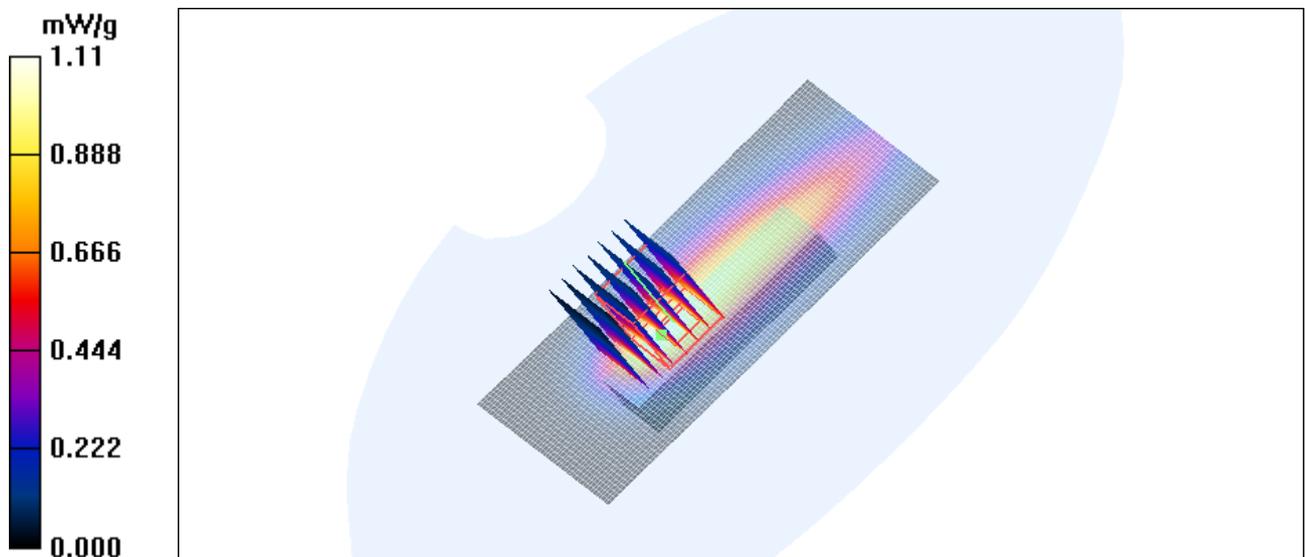


Figure 17 CDMA Cellular Test Position 2 Channel 384

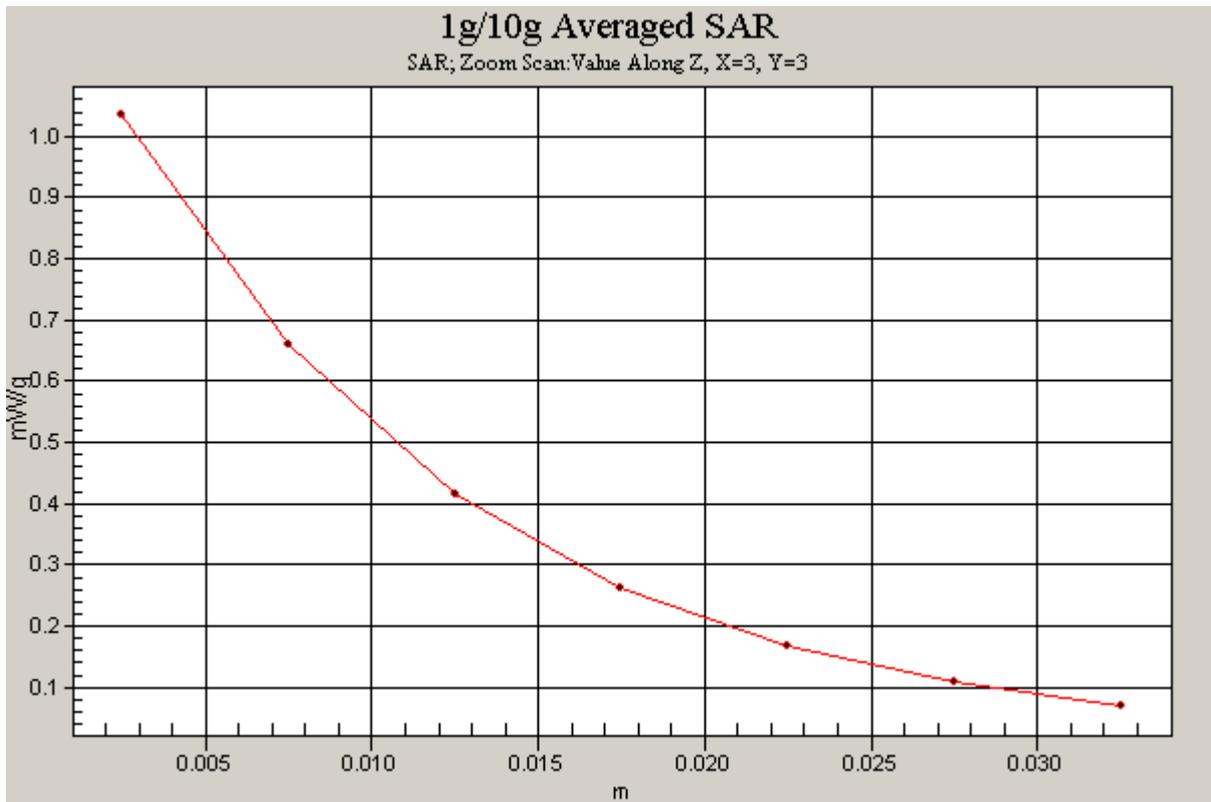


Figure 18 Z-Scan at power reference point (CDMA Cellular Test Position 2 Channel 384)

Date/Time: 2/5/2009 11:31:19 AM

### CDMA Cellular Test Position 2 Low frequency

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 2 Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.16 mW/g

**Test Position 2 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.4 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 1.30 W/kg

**SAR(1 g) = 0.857 mW/g; SAR(10 g) = 0.542 mW/g**

Maximum value of SAR (measured) = 1.05 mW/g

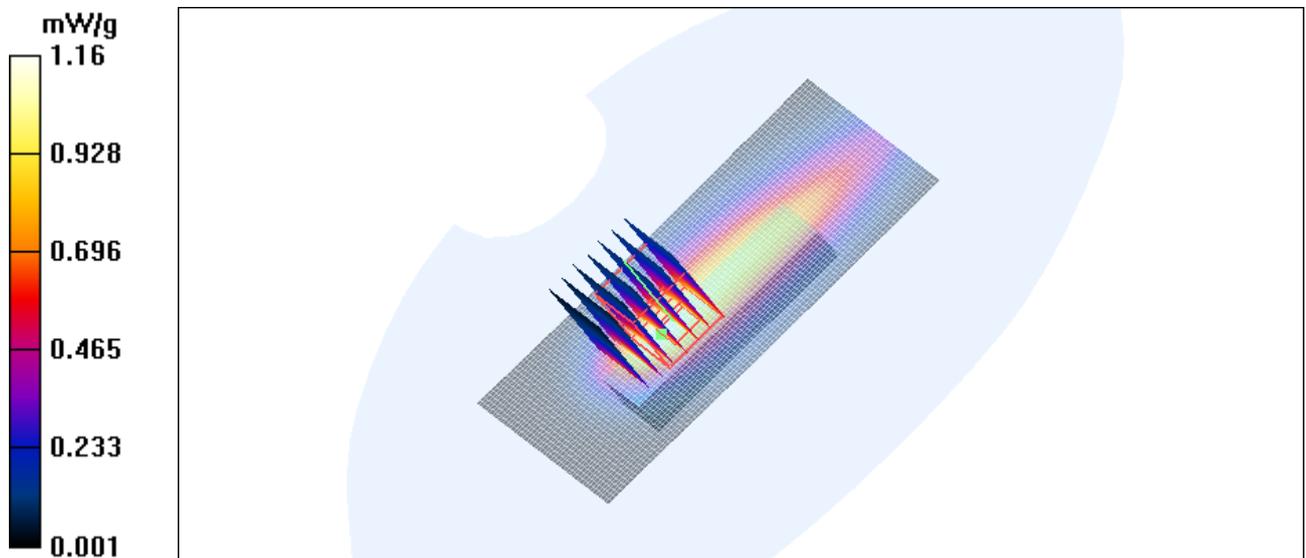


Figure 19 CDMA Cellular Test Position 2 Channel 1013

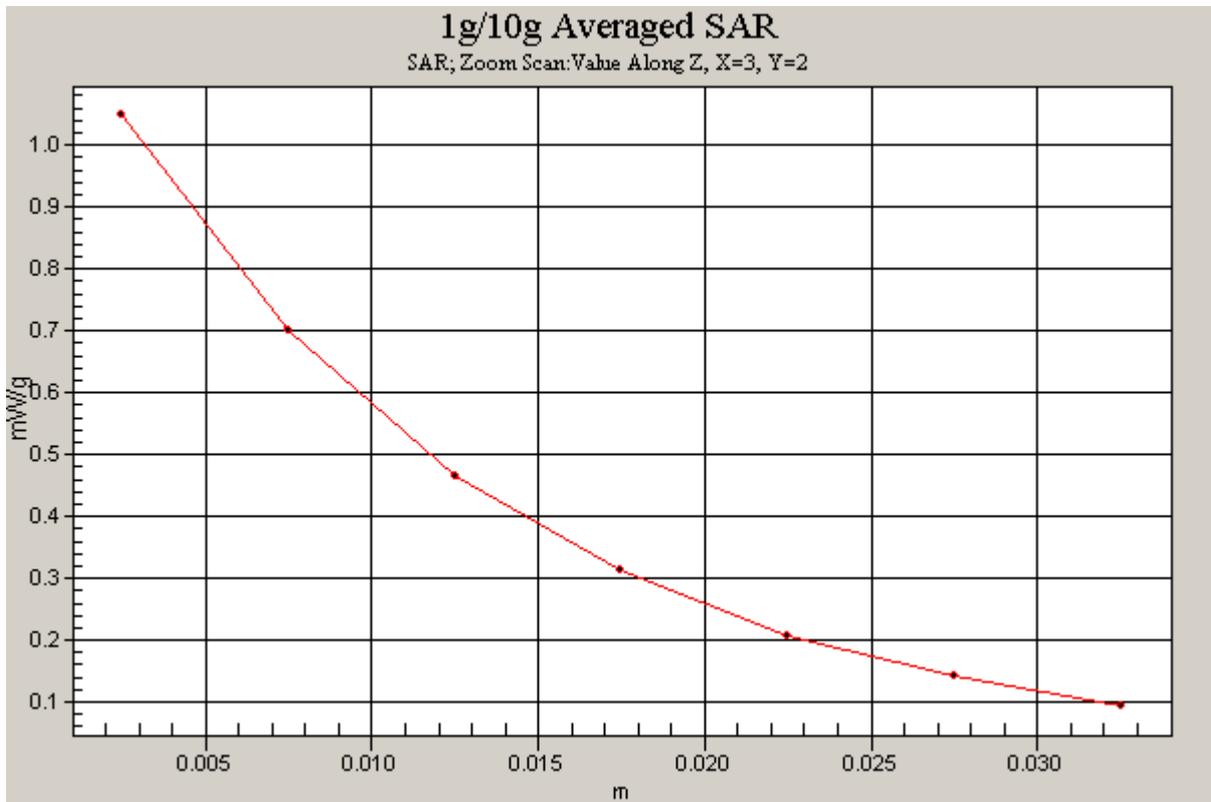


Figure 20 Z-Scan at power reference point (CDMA Cellular Test Position 2 Channel 1013)

Date/Time: 2/5/2009 12:24:12 PM

### CDMA Cellular Test Position 3 High frequency

Communication System: CDMA Cellular; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 3 High/Area Scan (41x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 mW/g

**Test Position 3 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.3 V/m; Power Drift = -0.149 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.859 mW/g; SAR(10 g) = 0.541 mW/g**

Maximum value of SAR (measured) = 1.07 mW/g

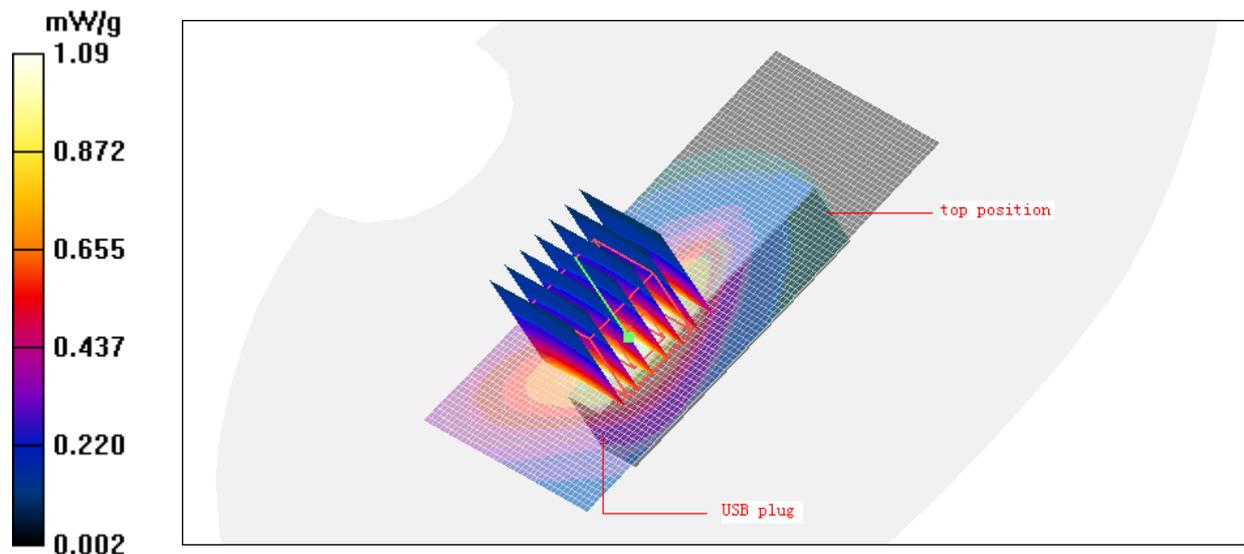


Figure 21 CDMA Cellular Test Position 3 Channel 384

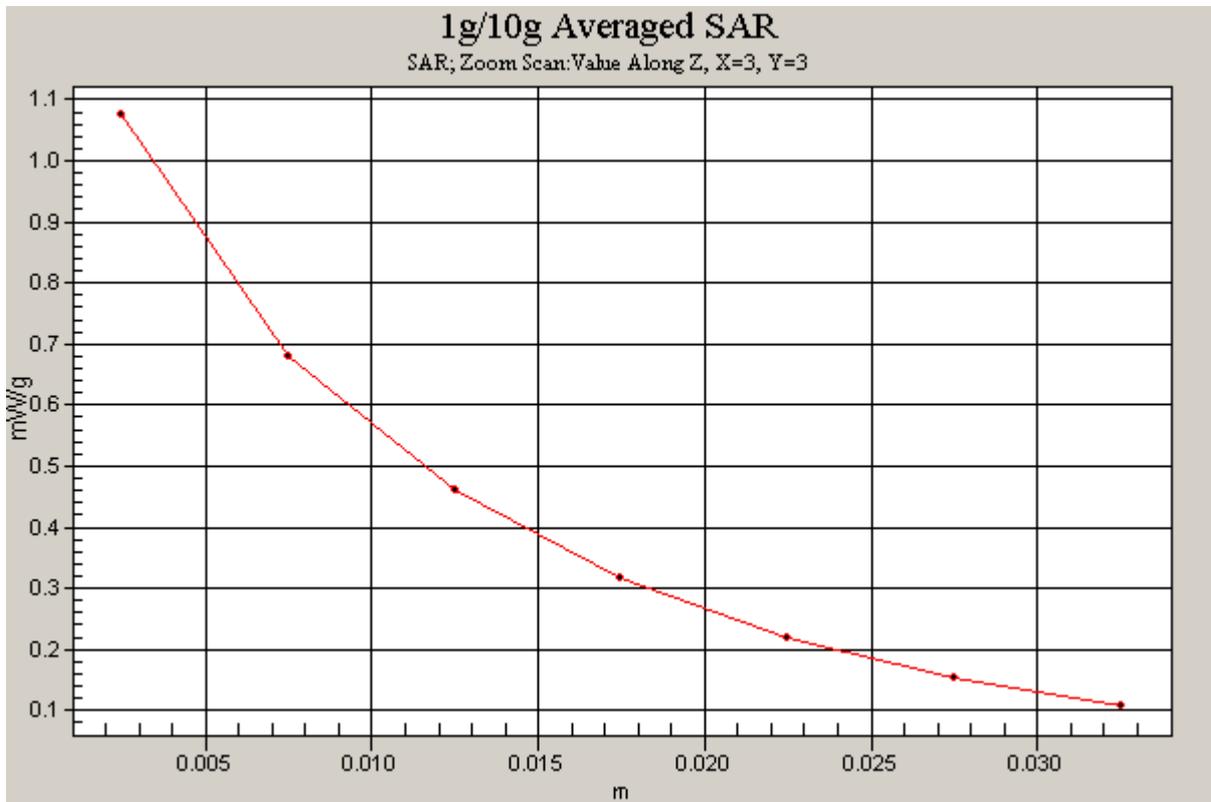


Figure 22 Z-Scan at power reference point (CDMA Cellular Test Position 3 Channel 384)

Date/Time: 2/5/2009 11:58:35 AM

### CDMA Cellular Test Position 3 Middle frequency

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 3 Middle/Area Scan (41x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.24 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.0 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 1.55 W/kg

**SAR(1 g) = 0.983 mW/g; SAR(10 g) = 0.621 mW/g**

Maximum value of SAR (measured) = 1.21 mW/g

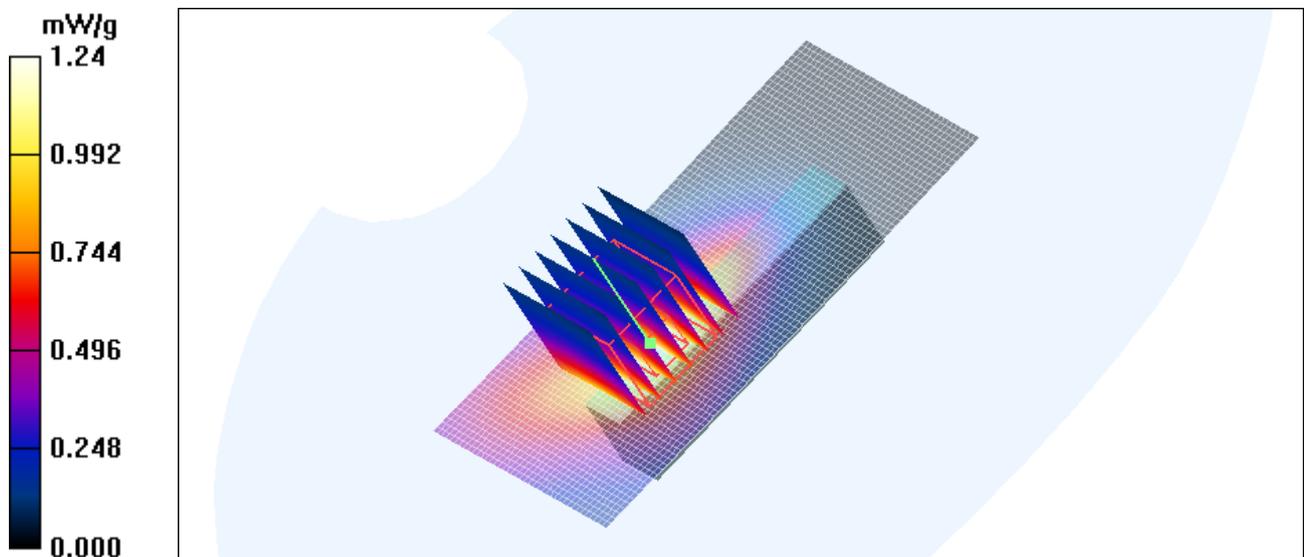


Figure 23 CDMA Cellular Test Position 3 Channel 384

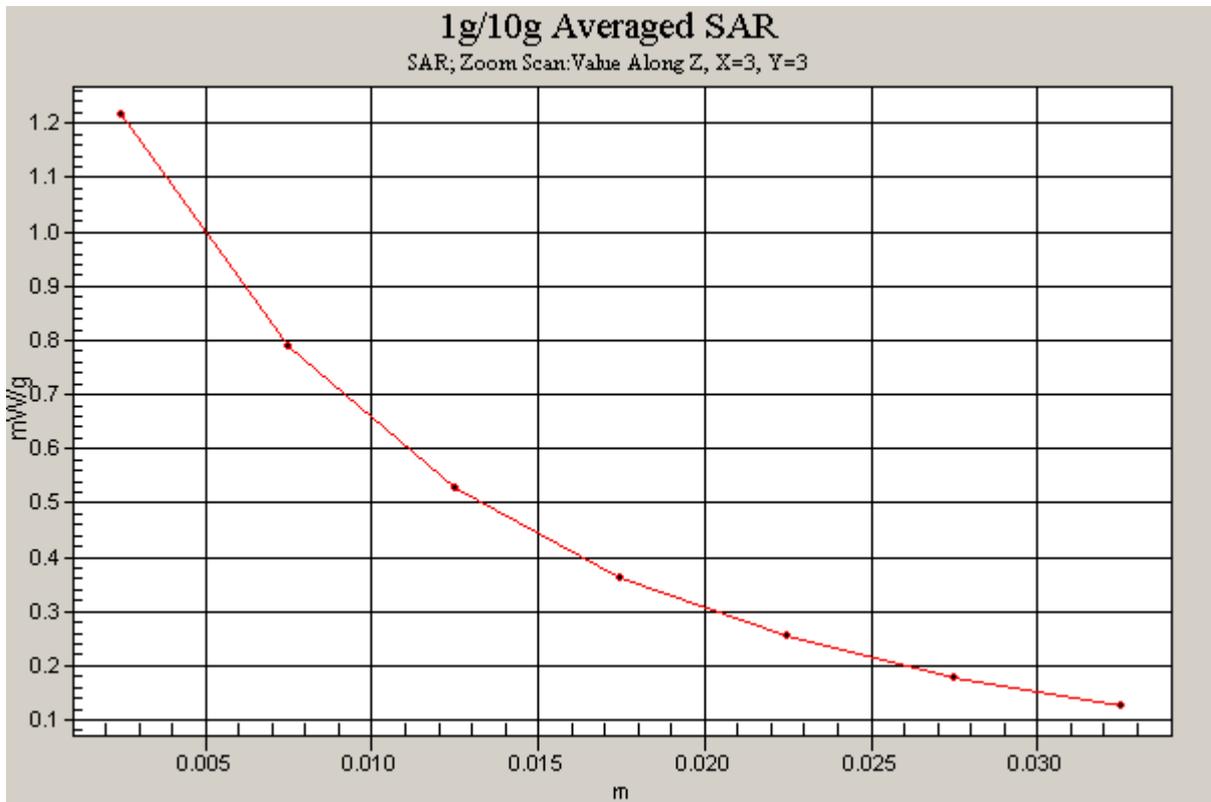


Figure 24 Z-Scan at power reference point (CDMA Cellular Test Position 3 Channel 384)

Date/Time: 2/5/2009 12:49:37 PM

### CDMA Cellular Test Position 3 Low frequency

Communication System: CDMA Cellular; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 3 Low/Area Scan (41x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

**Test Position 3 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.544 mW/g**

Maximum value of SAR (measured) = 1.08 mW/g

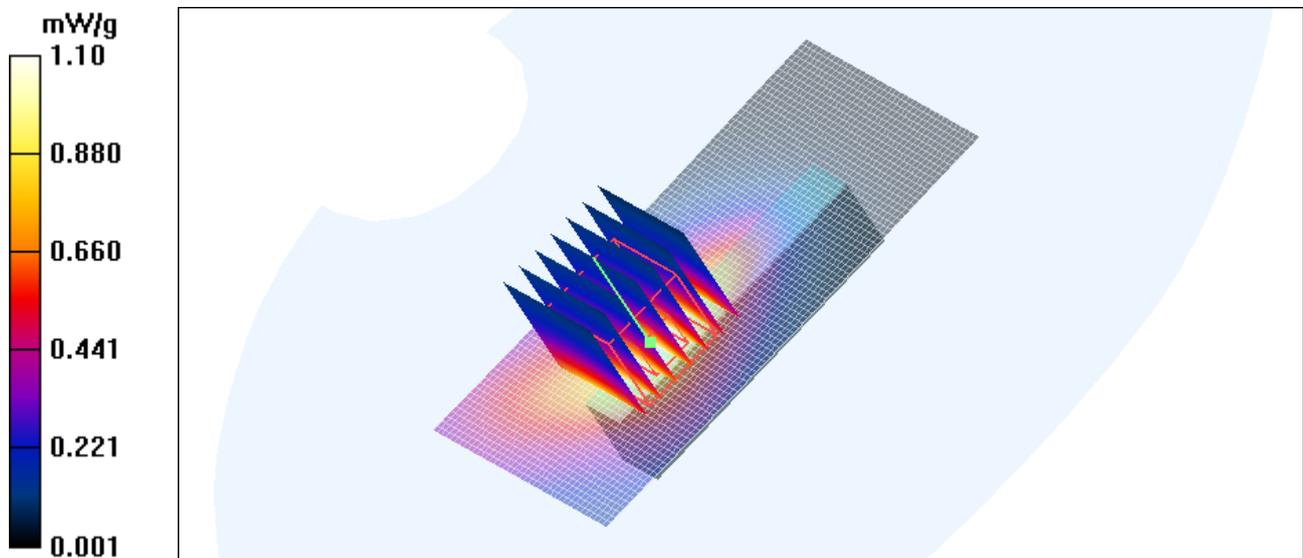


Figure 25 CDMA Cellular Test Position 3 Channel 1013

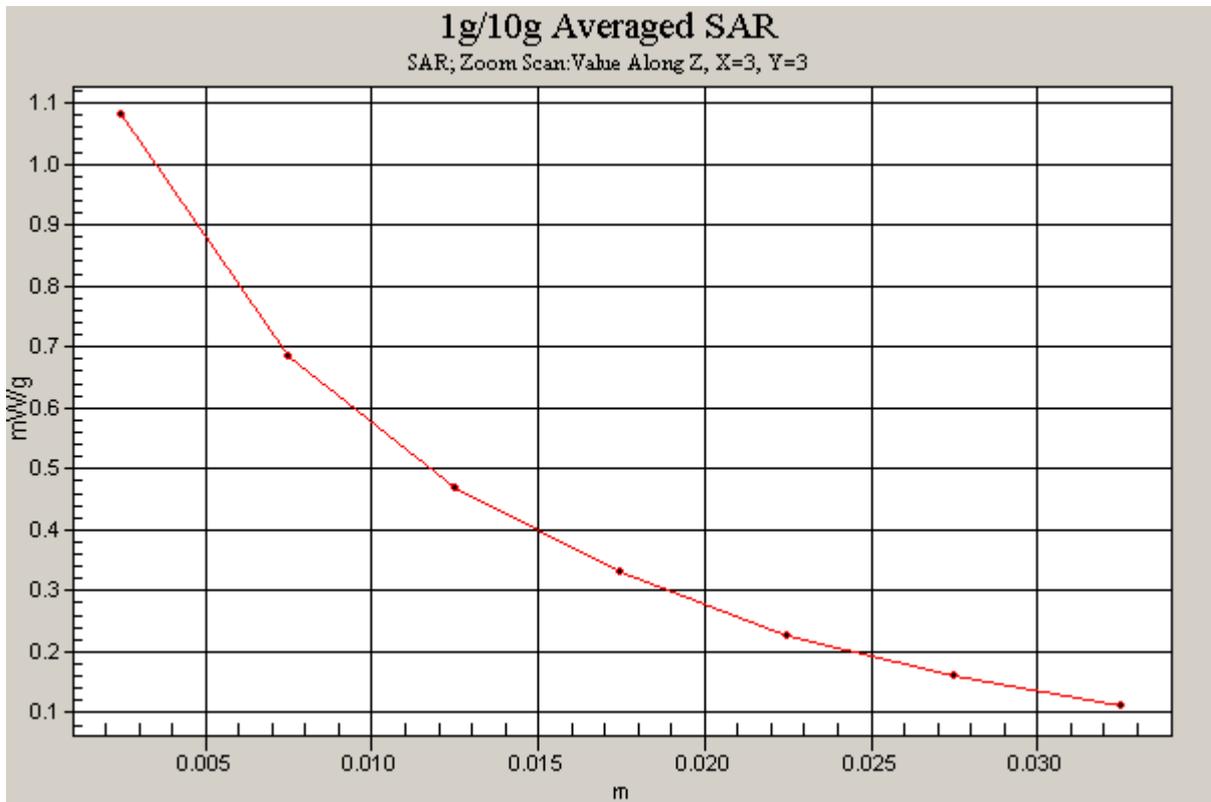


Figure 26 Z-Scan at power reference point (CDMA Cellular Test Position 3 Channel 1013)

Date/Time: 2/5/2009 1:11:13 PM

### CDMA Cellular Test Position 4 Middle frequency

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 4 Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.937 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.3 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.488 mW/g**

Maximum value of SAR (measured) = 0.928 mW/g

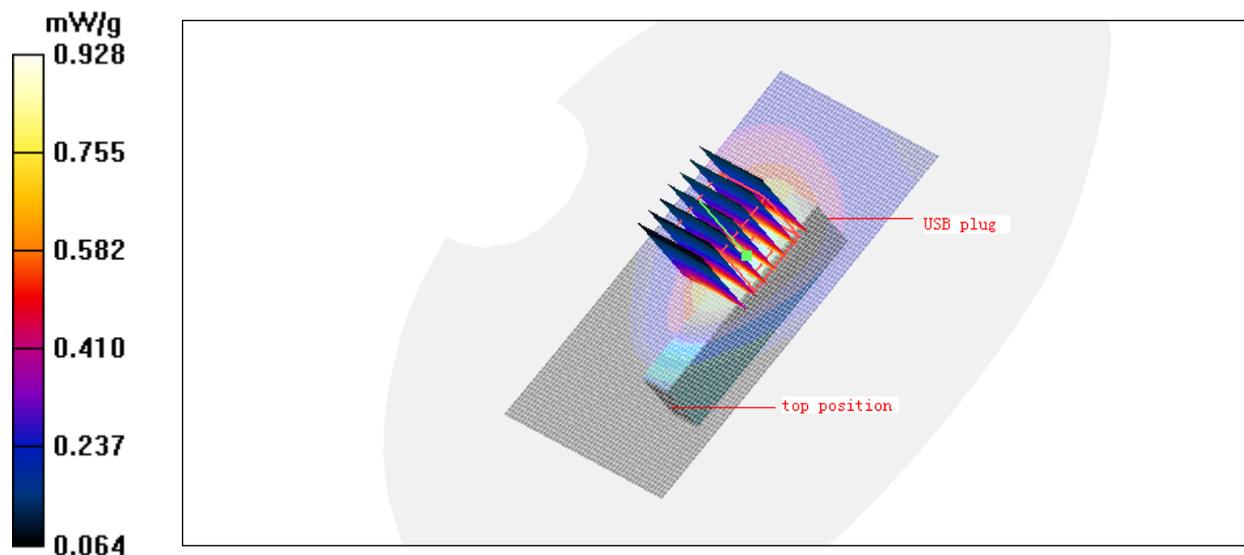


Figure 27 CDMA Cellular Test Position 4 Channel 384

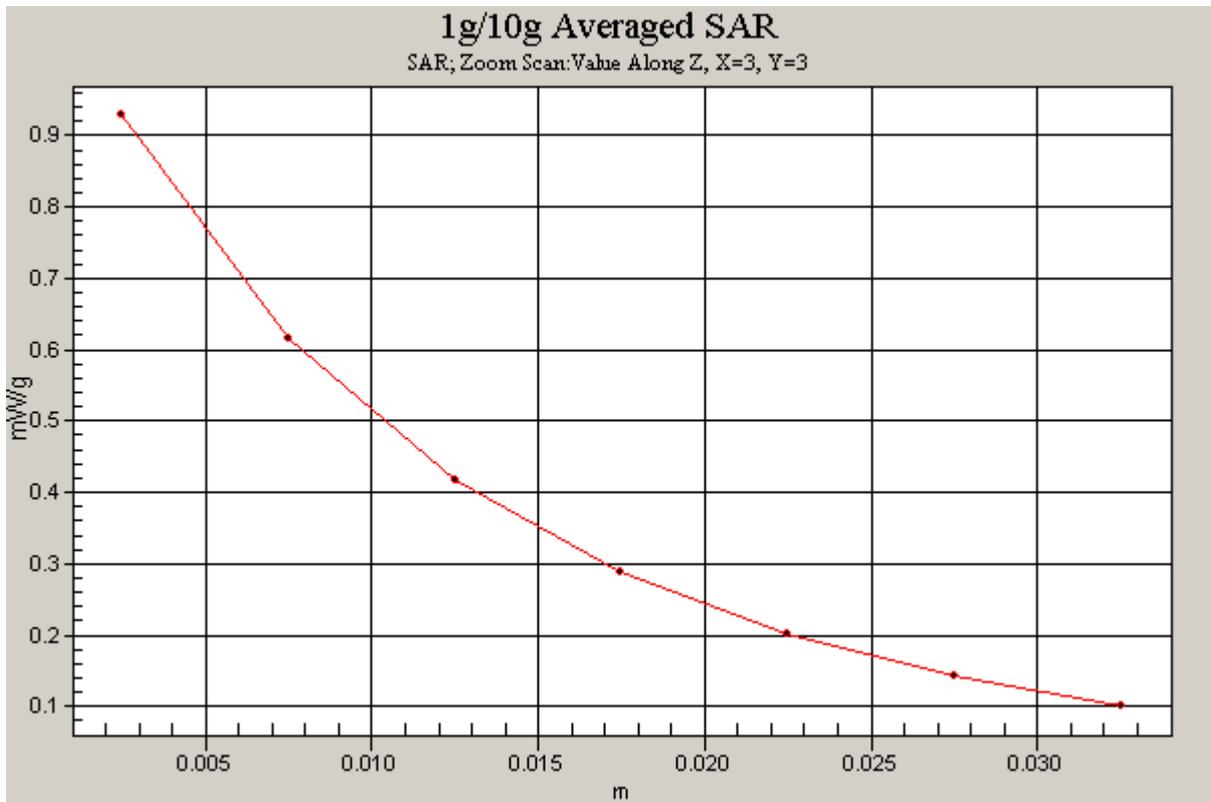


Figure 28 Z-Scan at power reference point (CDMA Cellular Test Position 4 Channel 384)

Date/Time: 2/5/2009 1:37:14 PM

### CDMA Cellular Test Position 5 Middle frequency

Communication System: CDMA Cellular; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 5 Middle/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.169 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.4 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.081 mW/g**

Maximum value of SAR (measured) = 0.414 mW/g

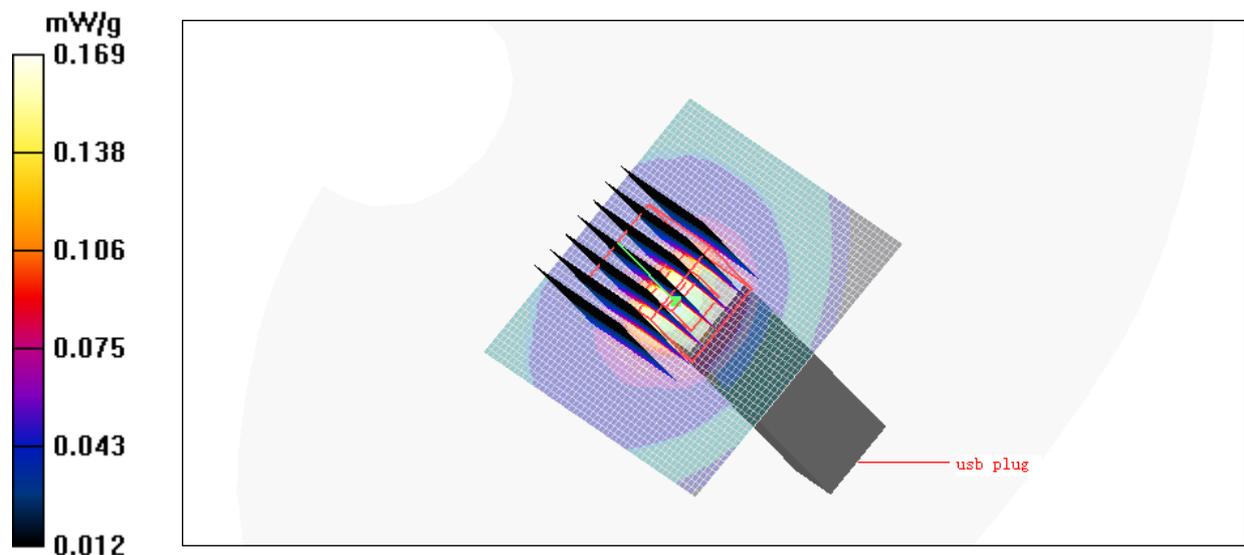


Figure 29 CDMA Cellular Test Position 5 Channel 384

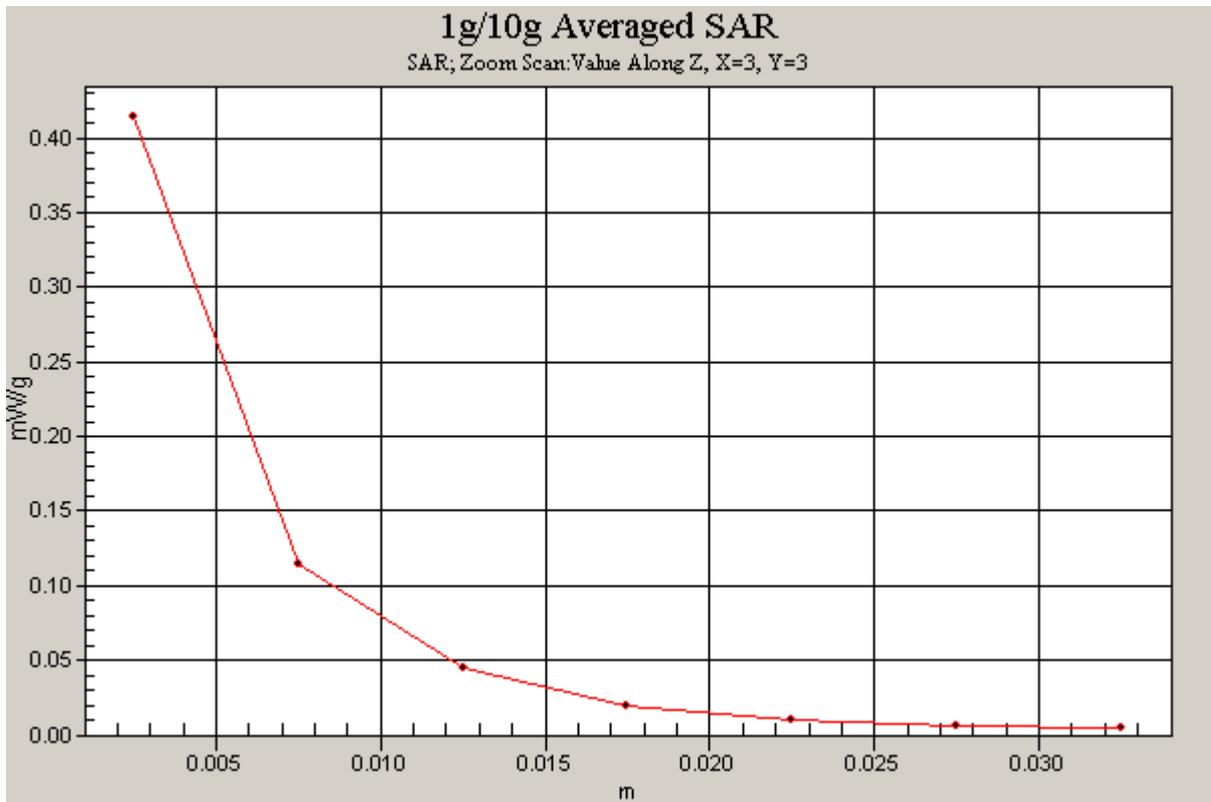


Figure 30 Z-Scan at power reference point (CDMA Cellular Test Position 5 Channel 384)

Date/Time: 2/5/2009 3:27:43 PM

**CDMA Cellular EV-DO REV.0 Test Position 1 High frequency**

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 1 High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.03 mW/g

**Test Position 1 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.4 V/m; Power Drift = 0.095 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.882 mW/g; SAR(10 g) = 0.578 mW/g**

Maximum value of SAR (measured) = 1.09 mW/g

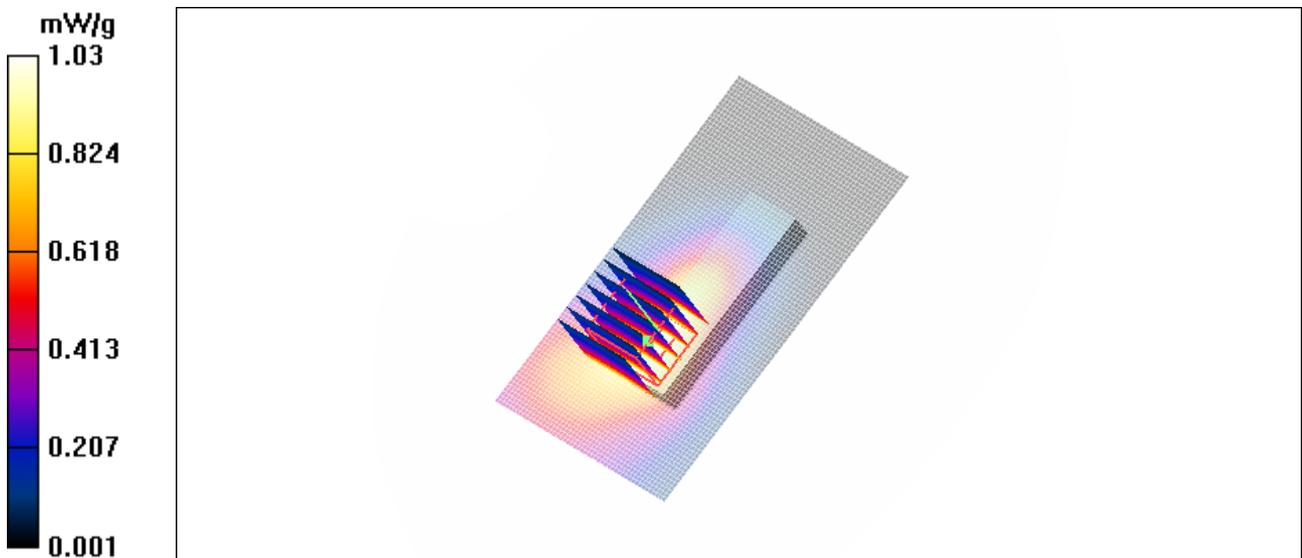


Figure 31 CDMA Cellular EV-DO REV.0 Test Position 1 Channel 777

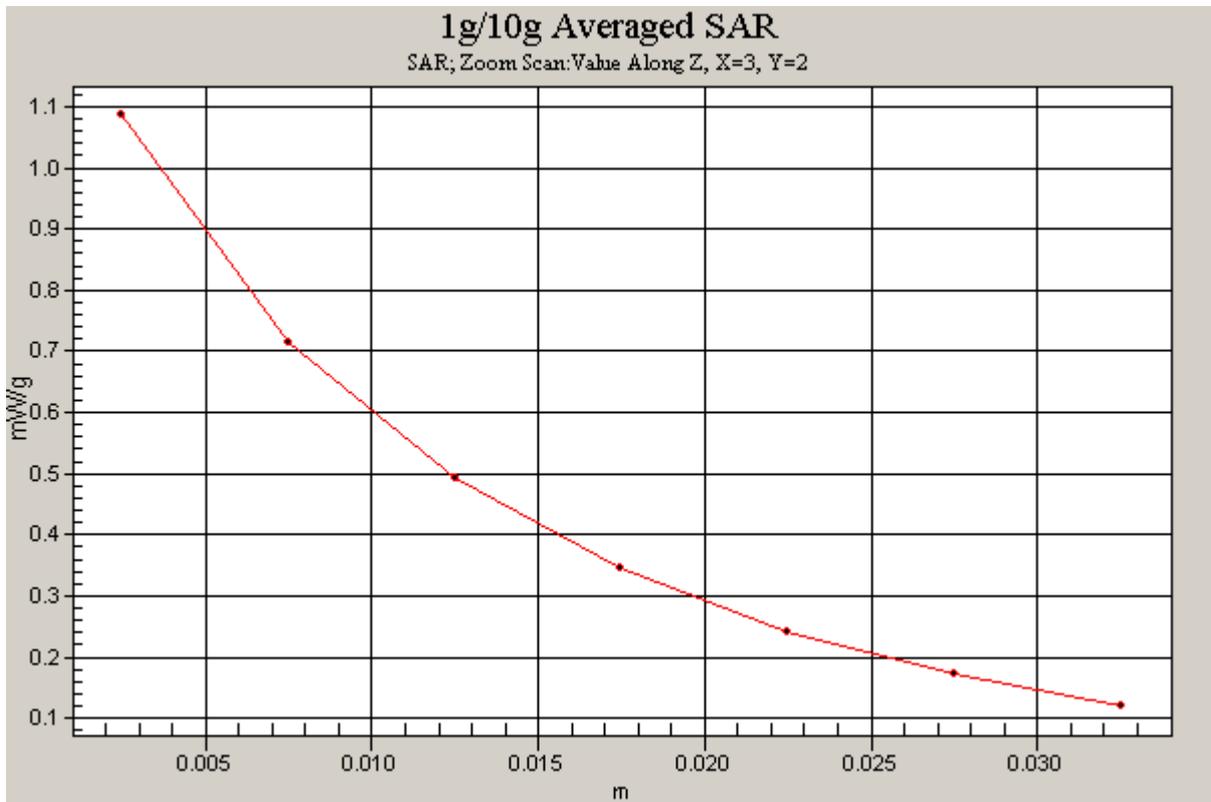


Figure 32 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 1 Channel 777)

Date/Time: 2/5/2009 3:03:22 PM

**CDMA Cellular EV-DO REV.0 Test Position 1 Middle frequency**

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 1 Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.18 mW/g

**Test Position 1 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.4 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.982 mW/g; SAR(10 g) = 0.642 mW/g**

Maximum value of SAR (measured) = 1.21 mW/g

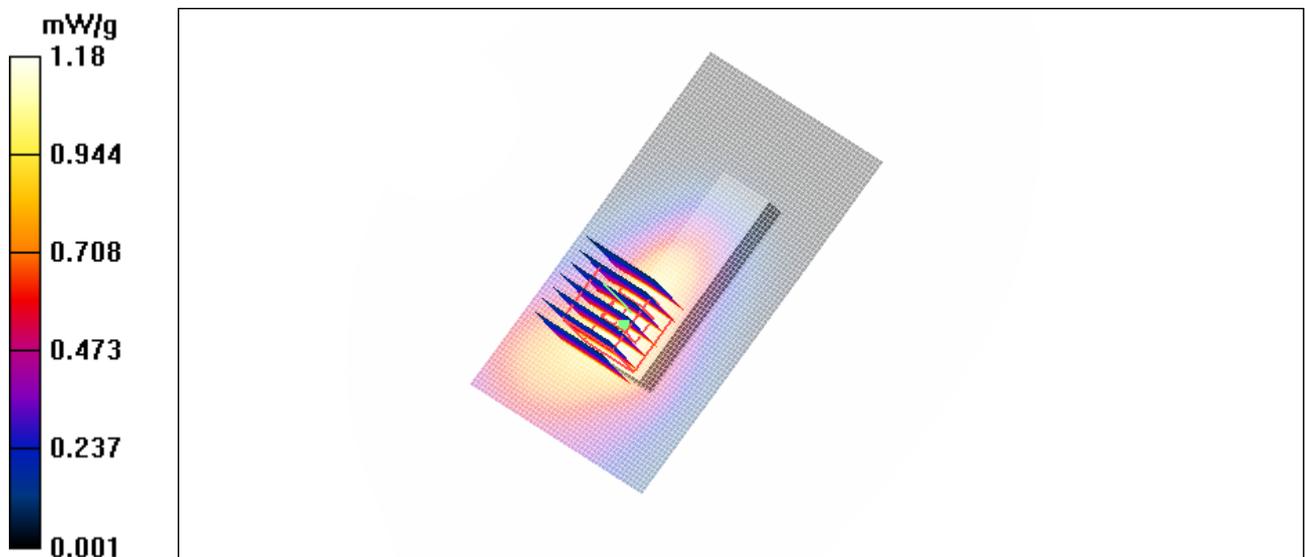


Figure 33 CDMA Cellular EV-DO REV.0 Test Position 1 Channel 384

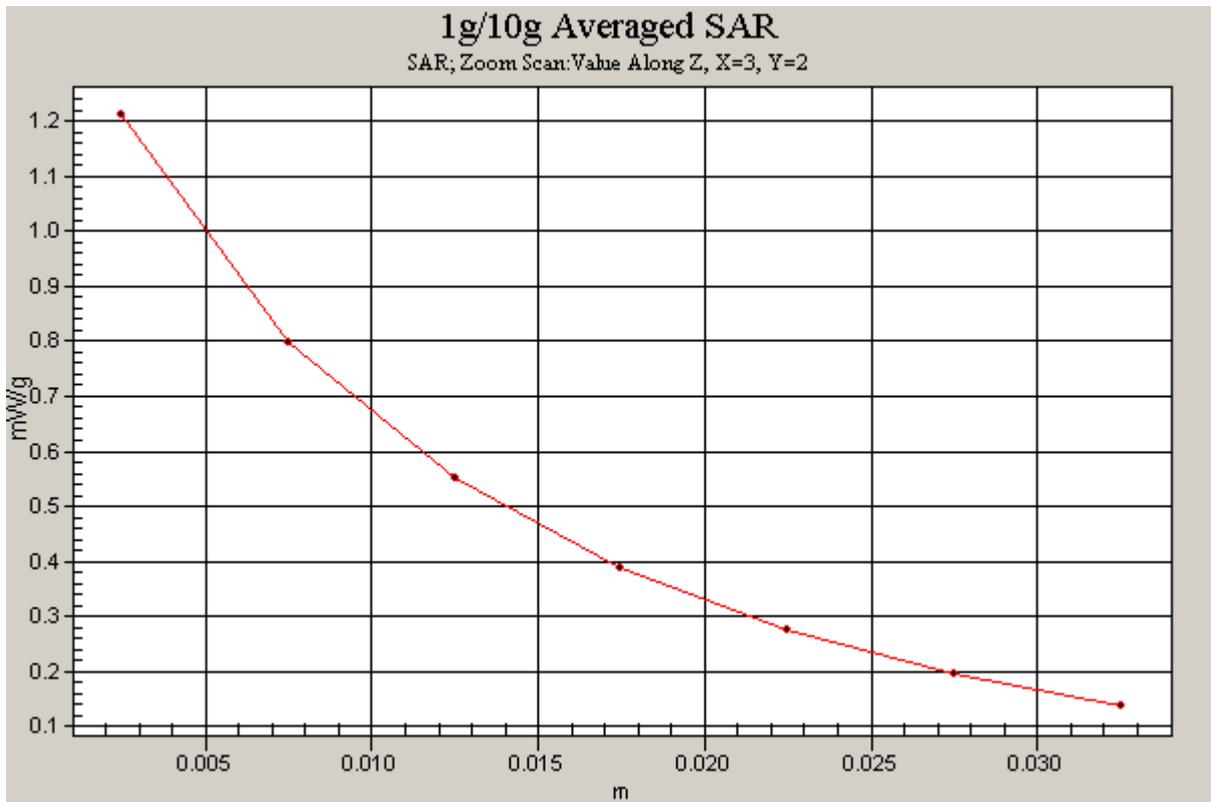


Figure 34 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 1 Channel 384)

Date/Time: 2/5/2009 3:55:51 PM

**CDMA Cellular EV-DO REV.0 Test Position 1 Low frequency**

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 1 Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

**Test Position 1 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.9 V/m; Power Drift = -0.070 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.609 mW/g**

Maximum value of SAR (measured) = 1.12 mW/g

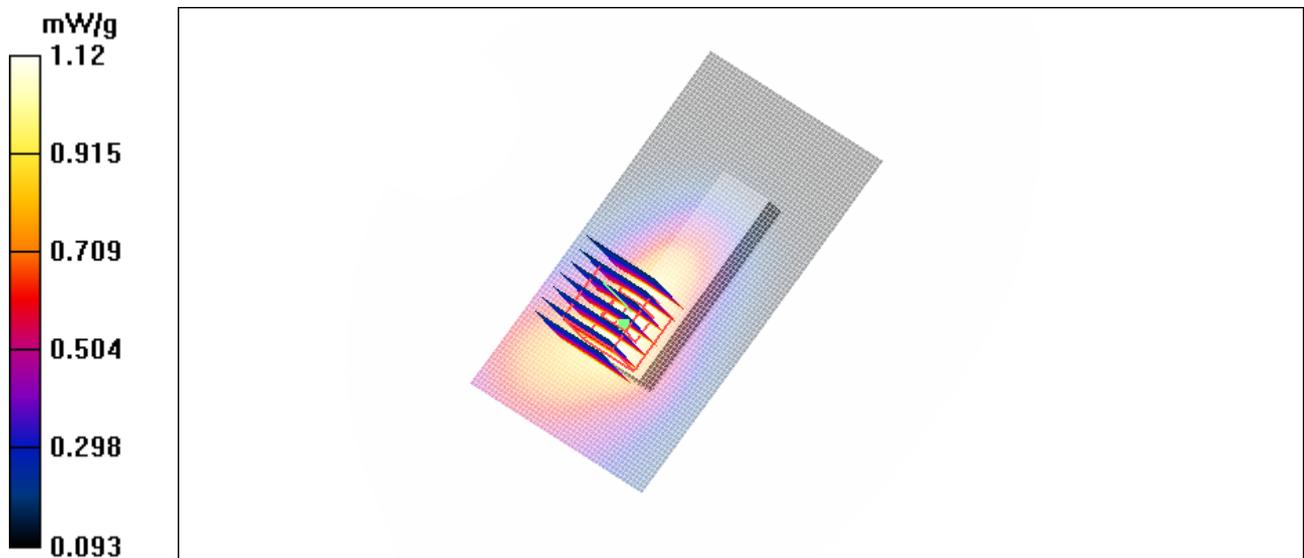


Figure 35 CDMA Cellular EV-DO REV.0 Test Position 1 Channel 1013

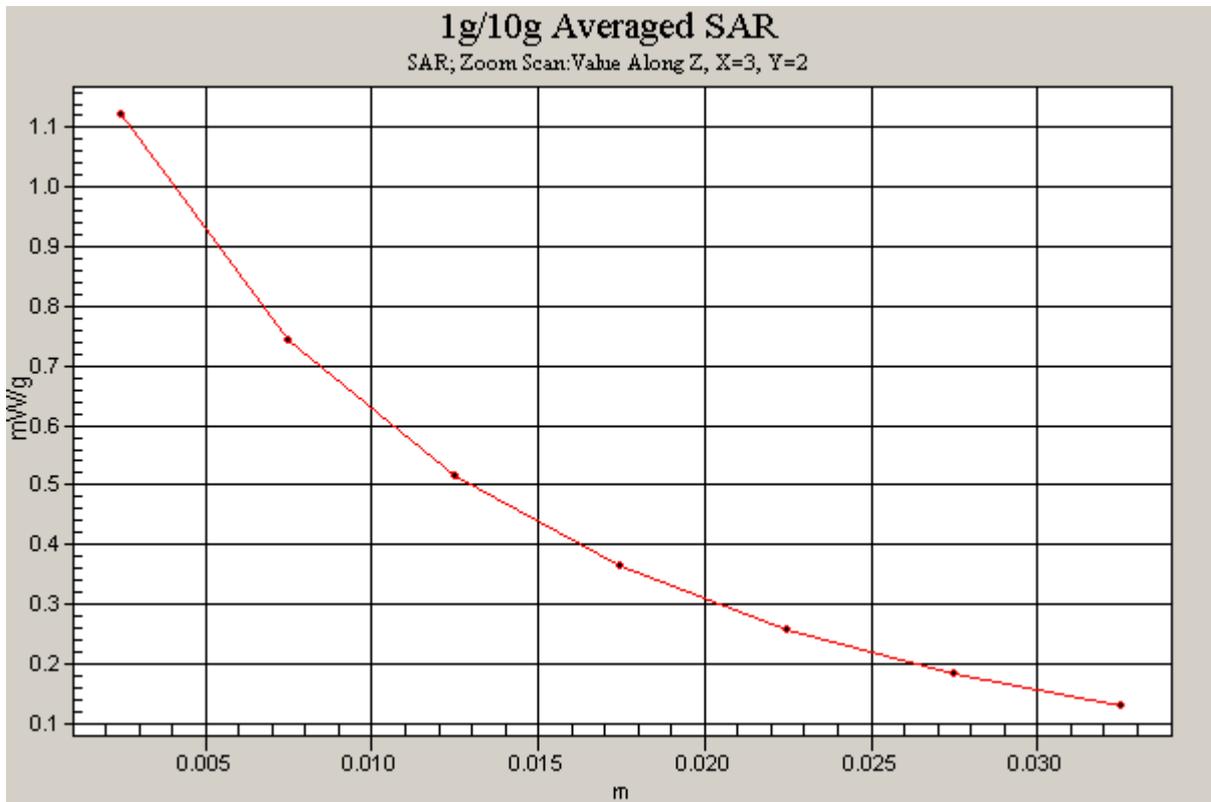


Figure 36 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 1 Channel 1013)

Date/Time: 2/5/2009 4:18:05 PM

**CDMA Cellular EV-DO REV.0 Test Position 2 Middle frequency**

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 2 Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 mW/g

**Test Position 2 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.9 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.794 mW/g; SAR(10 g) = 0.494 mW/g**

Maximum value of SAR (measured) = 0.972 mW/g

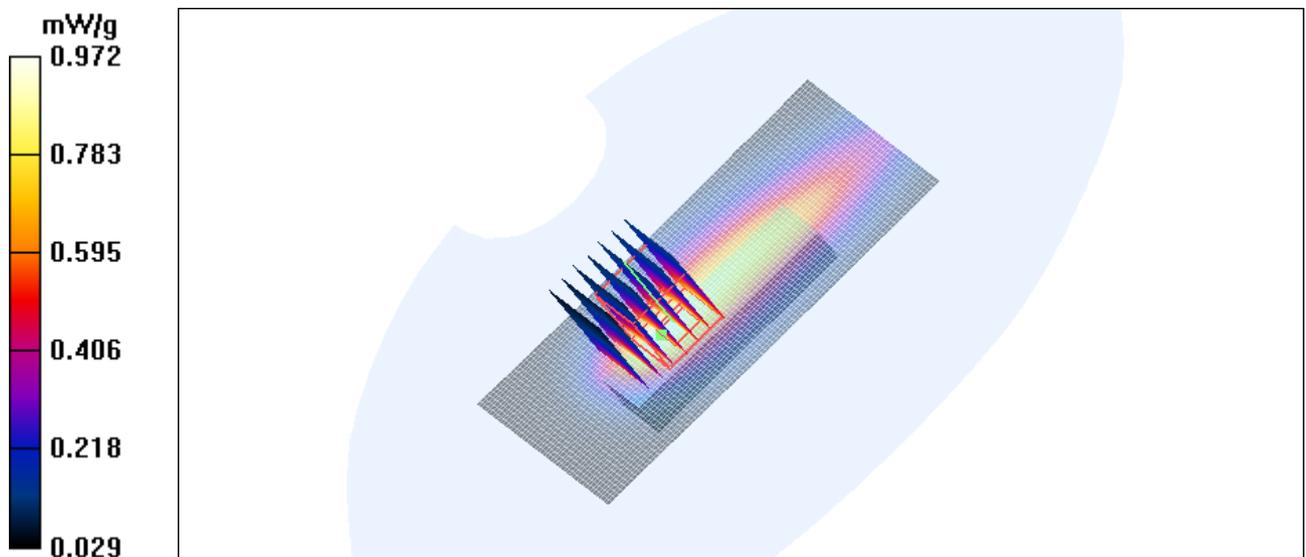


Figure 37 CDMA Cellular EV-DO REV.0 Test Position 2 Channel 384

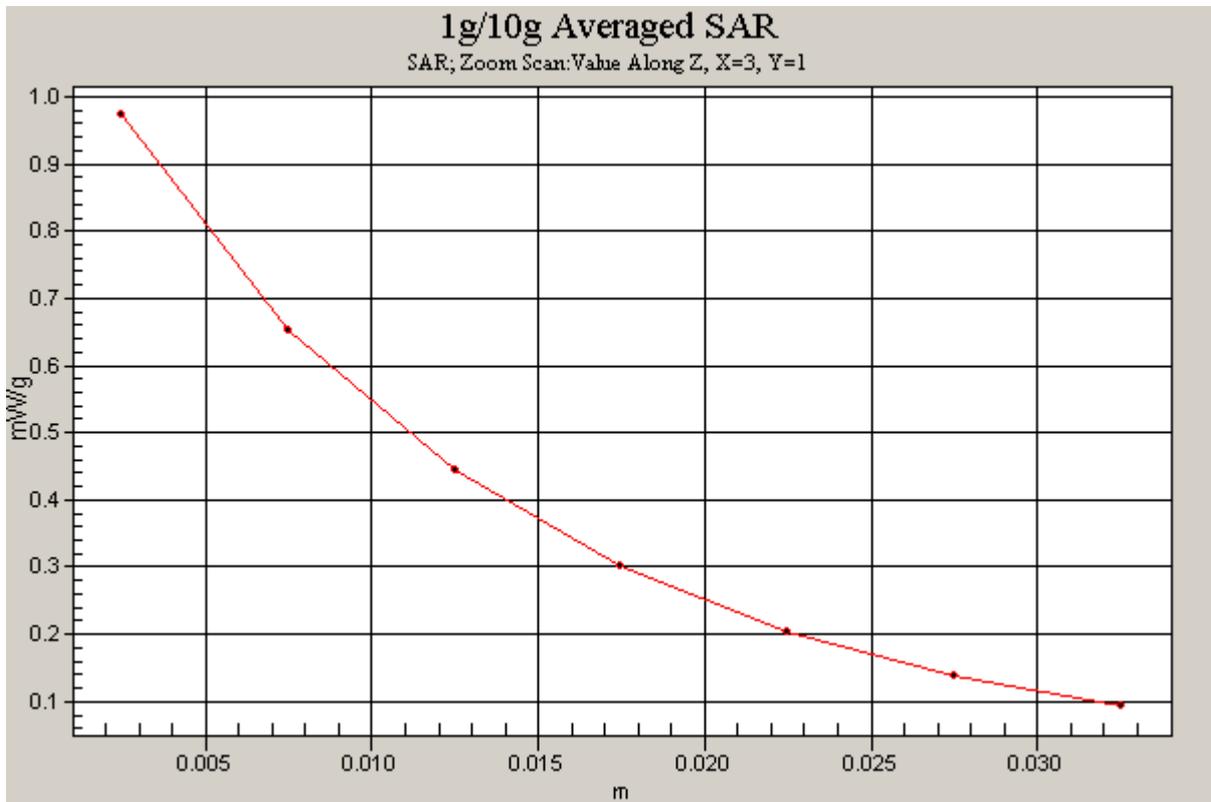


Figure 38 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 2 Channel 384)

Date/Time: 2/5/2009 5:17:47 PM

### CDMA Cellular EV-DO REV.0 Test Position 3 High frequency

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 848.31$  MHz;  $\sigma = 1.01$  mho/m;  $\epsilon_r = 55$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 3 High/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.10 mW/g

**Test Position 3 High/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.5 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.573 mW/g**

Maximum value of SAR (measured) = 1.16 mW/g

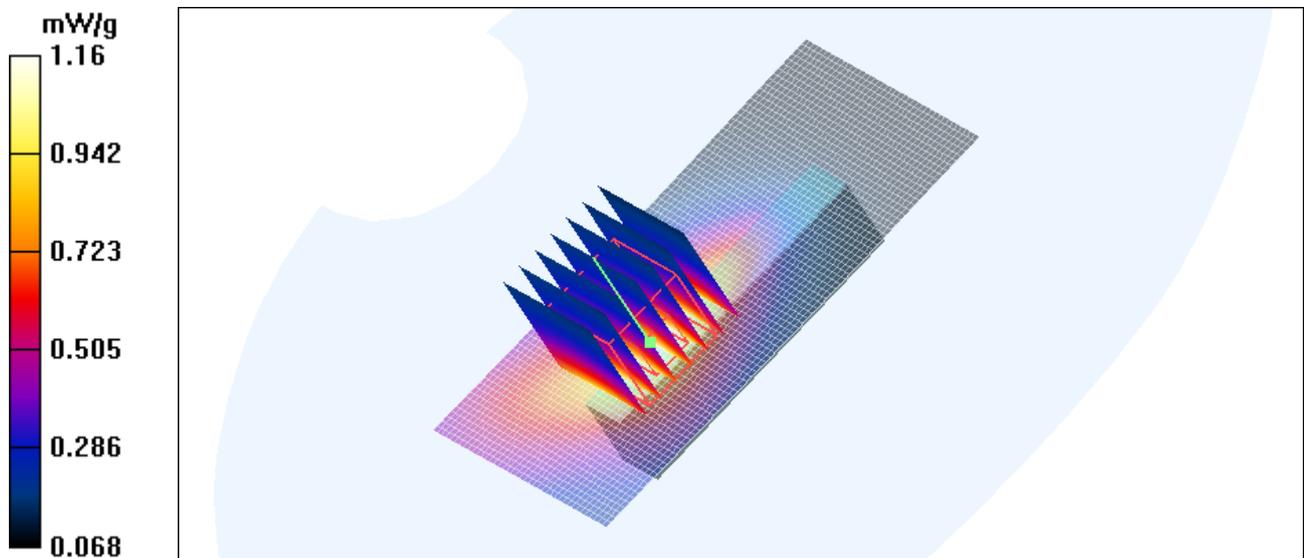


Figure 39 CDMA Cellular EV-DO REV.0 Test Position 3 Channel 777

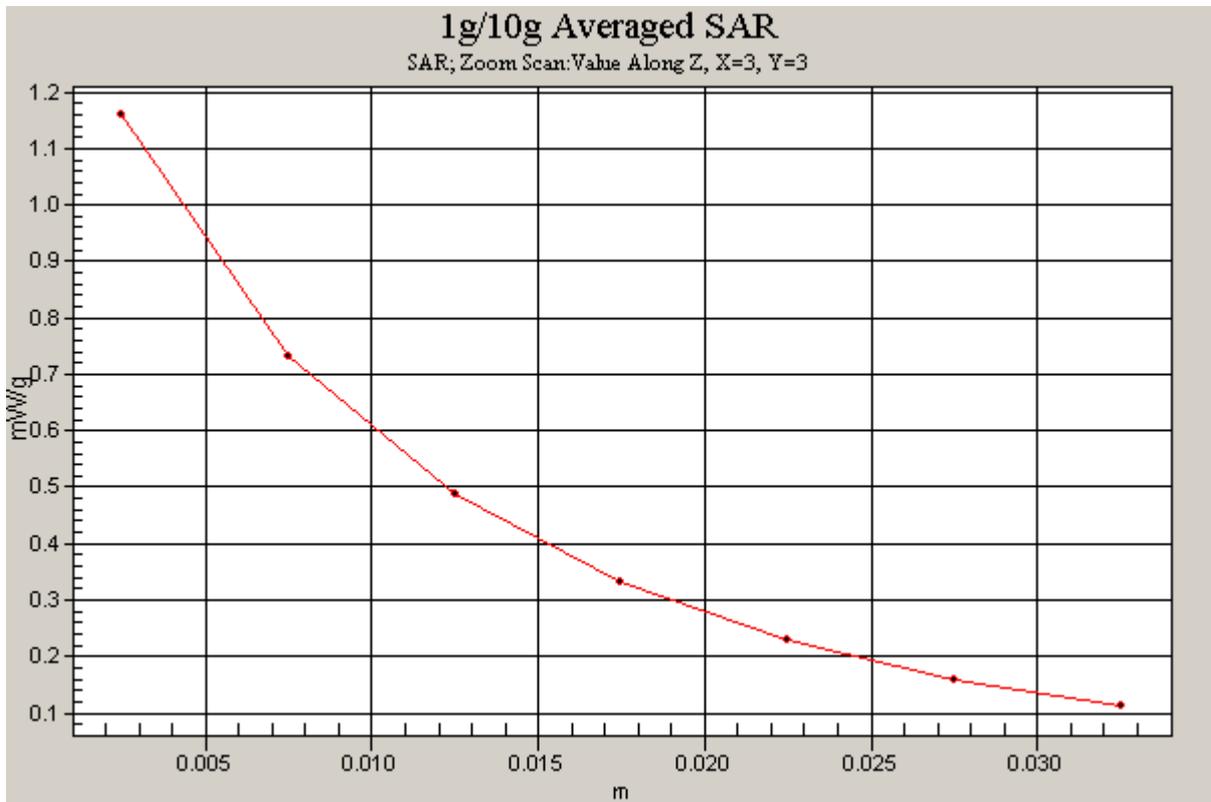


Figure 40 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 3 Channel 777)

Date/Time: 2/5/2009 4:43:13 PM

**CDMA Cellular EV-DO REV.0 Test Position 3 Middlefrequency**

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 3 Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.26 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.3 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.678 mW/g**

Maximum value of SAR (measured) = 1.37 mW/g

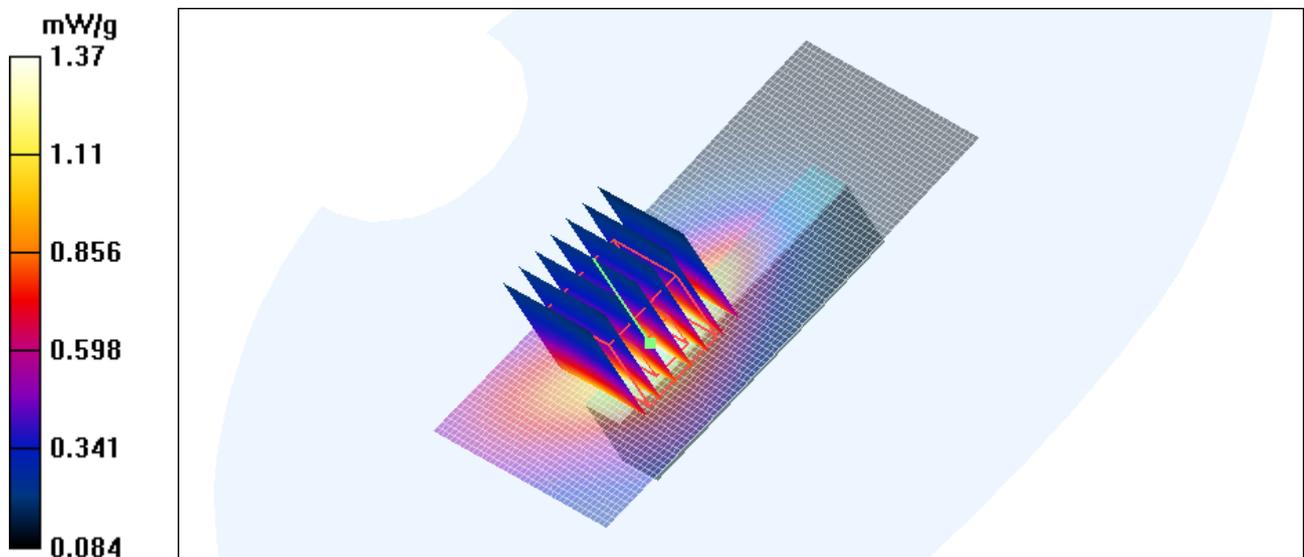


Figure 41 CDMA Cellular EV-DO REV.0 Test Position 3 Channel 384

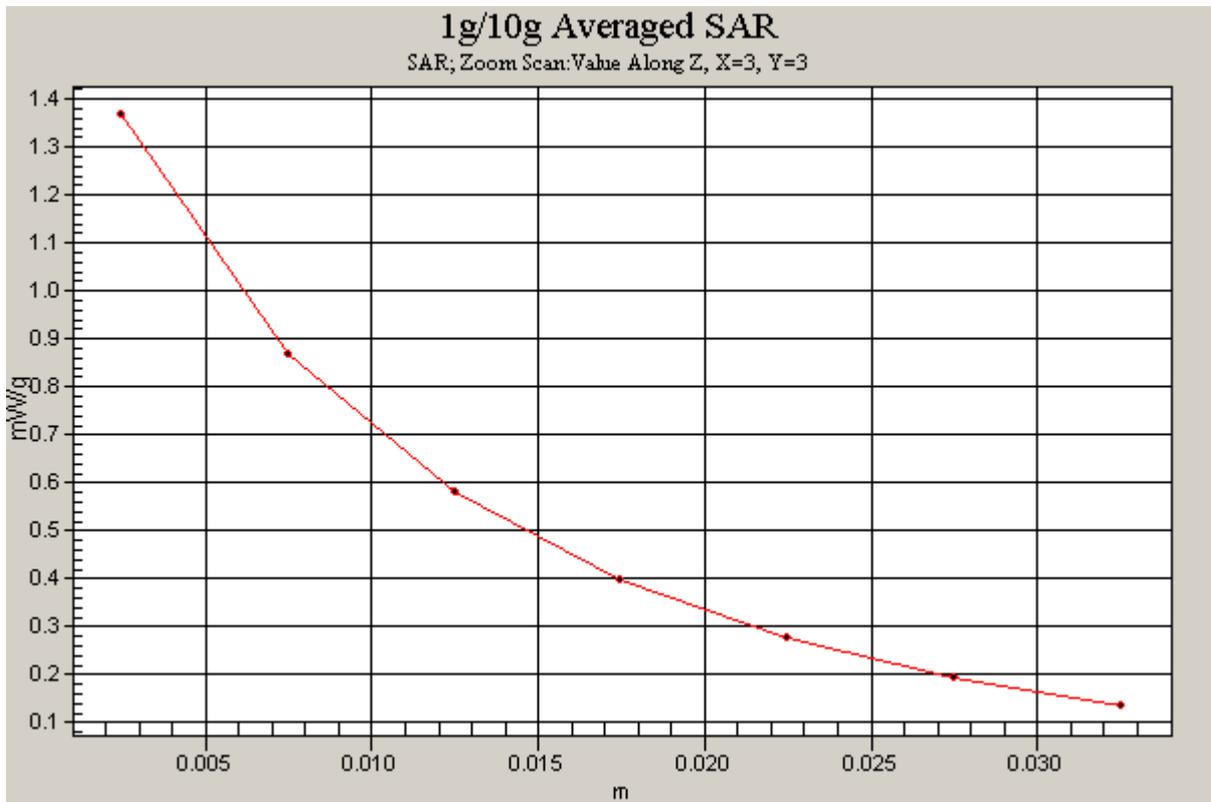


Figure 42 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 3 Channel 384)

Date/Time: 2/5/2009 5:39:21 PM

### CDMA Cellular EV-DO REV.0 Test Position 3 Low frequency

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 824.7 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.987$  mho/m;  $\epsilon_r = 55.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 3 Low/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.12 mW/g

**Test Position 3 Low/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.6 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.955 mW/g; SAR(10 g) = 0.602 mW/g**

Maximum value of SAR (measured) = 1.20 mW/g

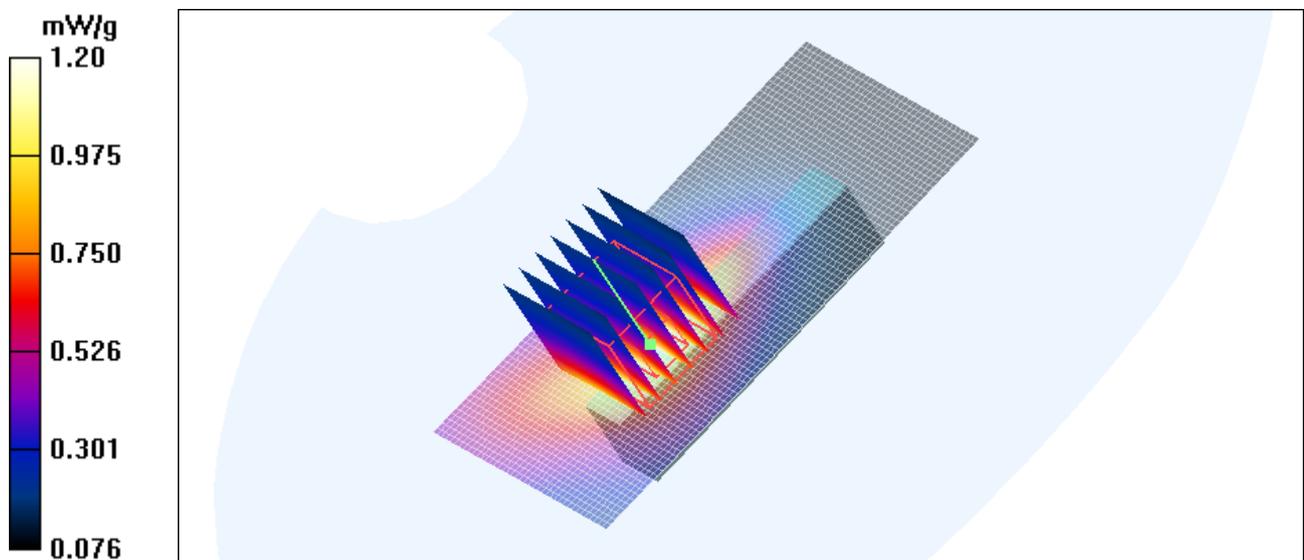


Figure 43 CDMA Cellular EV-DO REV.0 Test Position 3 Channel 1013

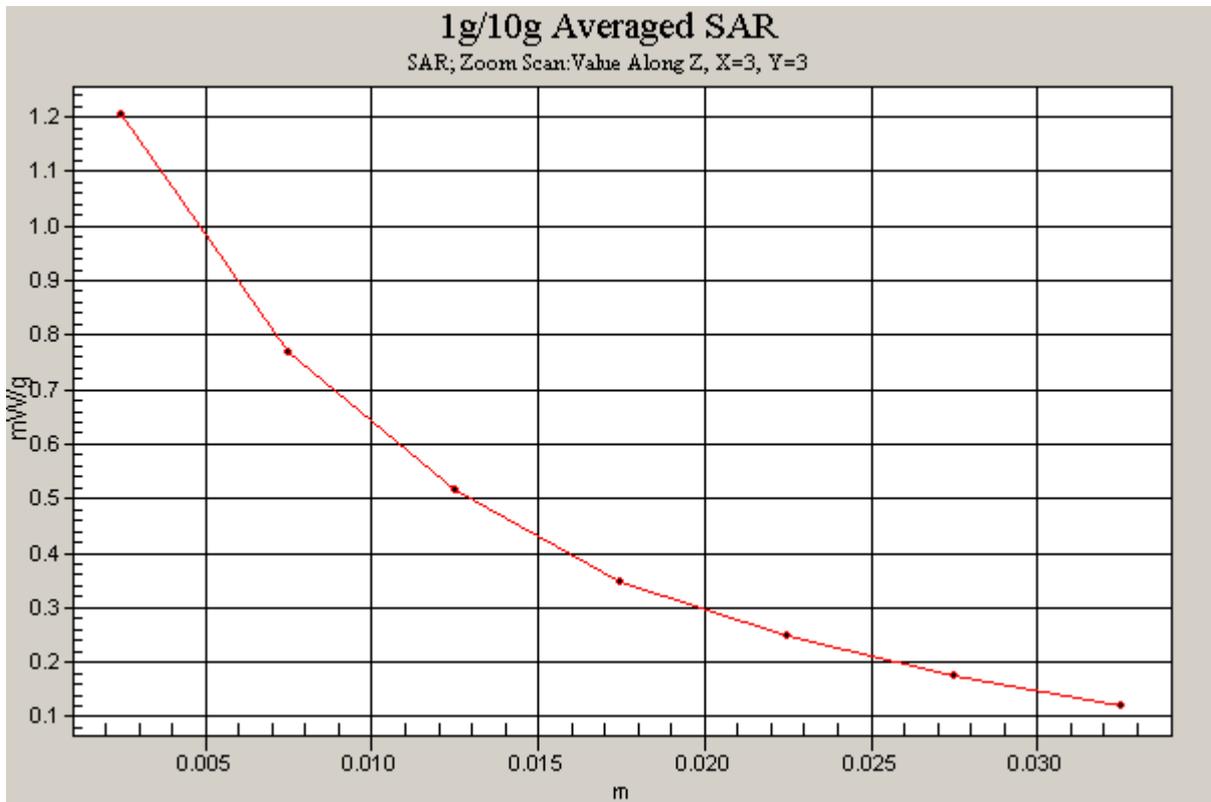


Figure 44 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 3 Channel 1013)

Date/Time: 2/5/2009 6:06:31 PM

**CDMA Cellular EV-DO REV.0 Test Position 4 Middlefrequency**

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 4 Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.870 mW/g

**Test Position 4 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.8 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.479 mW/g**

Maximum value of SAR (measured) = 0.906 mW/g

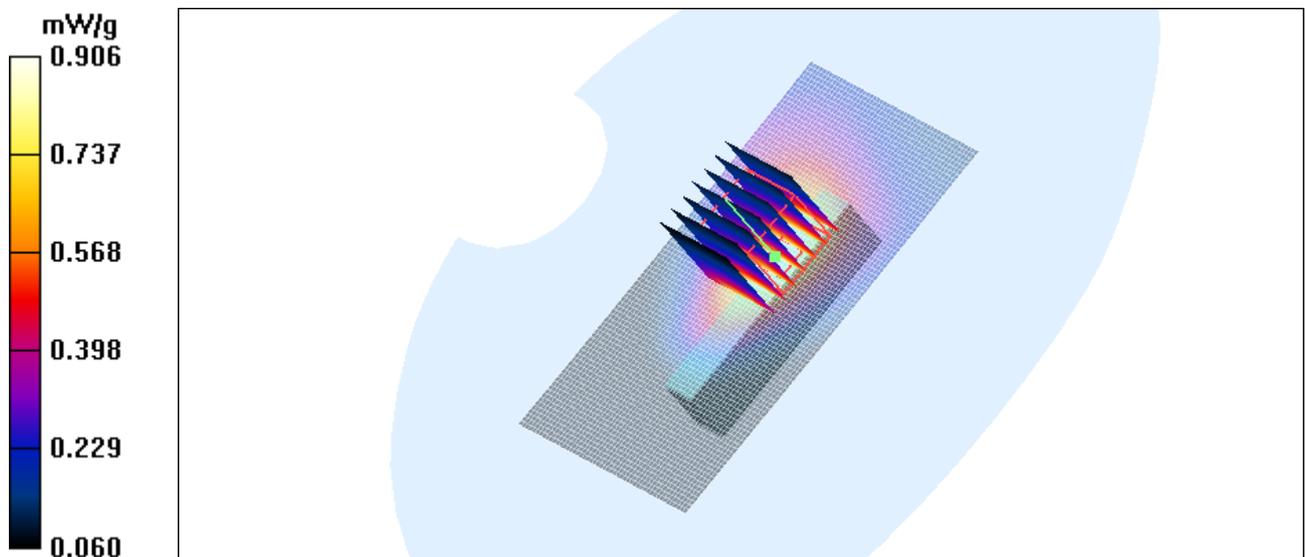


Figure 45 CDMA Cellular EV-DO REV.0 Test Position 4 Channel 384

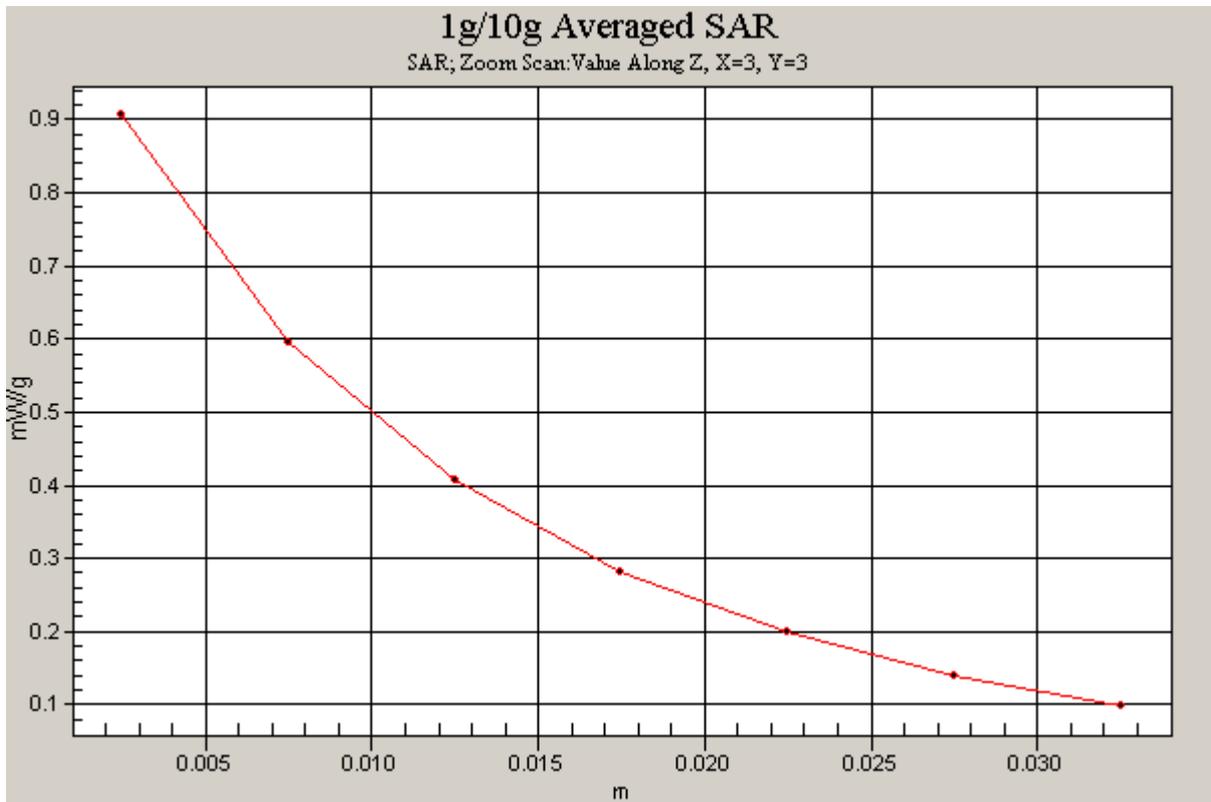


Figure 46 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 4 Channel 384)

Date/Time: 2/5/2009 6:27:42 PM

### CDMA Cellular EV-DO REV.0 Test Position 5 Middle frequency

Communication System: CDMA Cellular EVDO Rev.0; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 5 Middle/Area Scan (51x51x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.171 mW/g

**Test Position 5 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = -0.161 dB

Peak SAR (extrapolated) = 1.11 W/kg

**SAR(1 g) = 0.244 mW/g; SAR(10 g) = 0.083 mW/g**

Maximum value of SAR (measured) = 0.421 mW/g

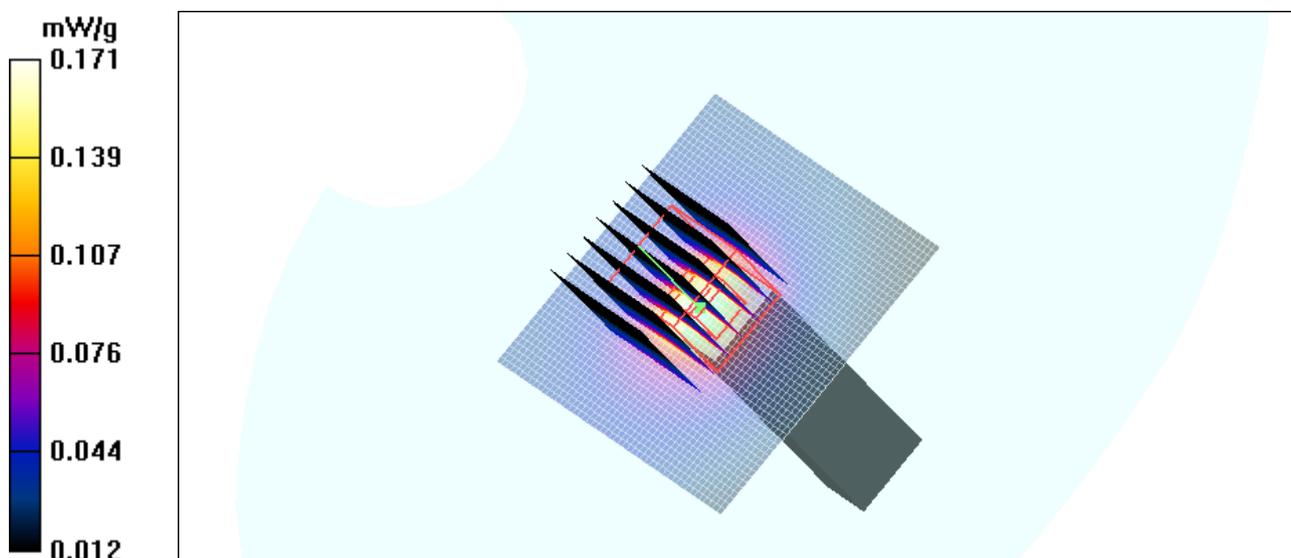


Figure 47 CDMA Cellular EV-DO REV.0 Test Position 5 Channel 384

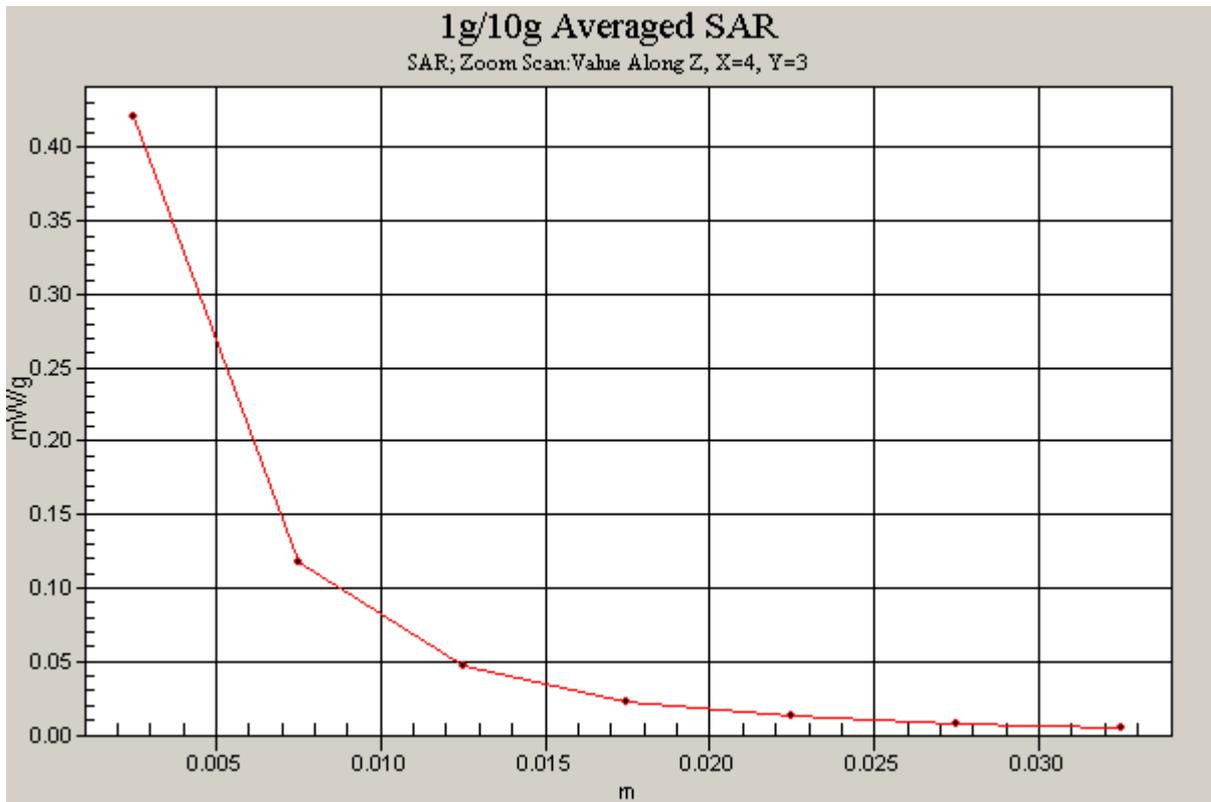


Figure 48 Z-Scan at power reference point (CDMA Cellular EV-DO REV.0 Test Position 5 Channel 384)

Date/Time: 2/5/2009 6:52:11 PM

**CDMA Cellular EV-DO REV.A Test Position 3 Middle frequency**

Communication System: CDMA Cellular EVDO Rev.A; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.997$  mho/m;  $\epsilon_r = 55.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3660; ConvF(9.1, 9.1, 9.1); Calibrated: 9/3/2008
- Electronics: DAE4 Sn452; Calibrated: 11/18/2008
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1246
- Measurement SW: DASY4, V4.7 Build 55; Postprocessing SW: SEMCAD, V1.8 Build 176

**Test Position 3 Middle/Area Scan (51x91x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.29 mW/g

**Test Position 3 Middle/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.2 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 1.67 W/kg

**SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.680 mW/g**

Maximum value of SAR (measured) = 1.33 mW/g

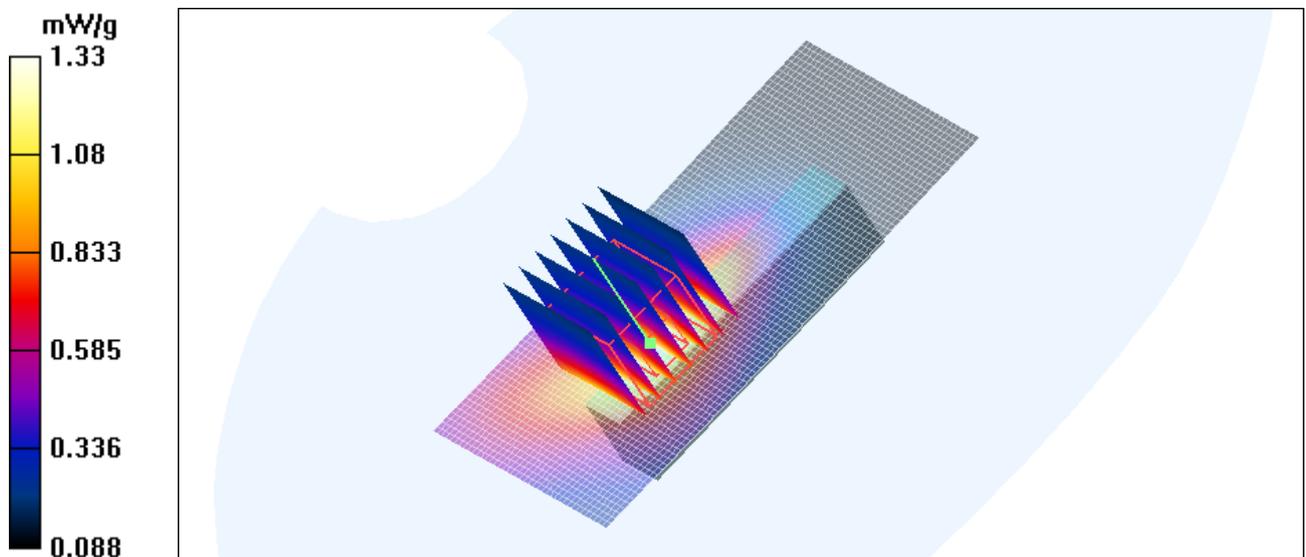


Figure 49 CDMA Cellular EV-DO REV.A Test Position 3 Channel 384

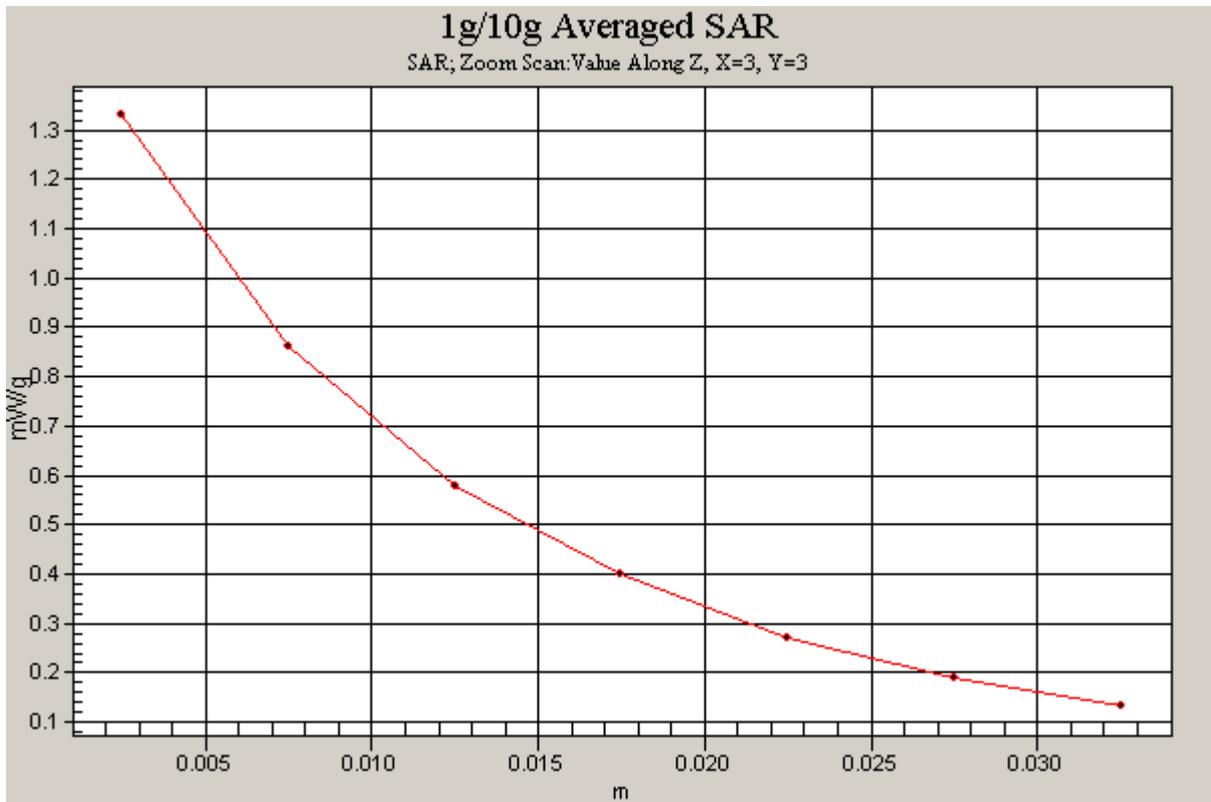


Figure 50 Z-Scan at power reference point (CDMA Cellular EV-DO REV.A Test Position 3 Channel 384)

# TA Technology (Shanghai) Co., Ltd. Test Report

No. RZA2009-0069FCC

Page 76of 100

## ANNEX D: PROBE CALIBRATION CERTIFICATE

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA (Auden)**

Certificate No: **EX3-3660\_Sep08**

### CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3660**

Calibration procedure(s) **QA CAL-01.v6 and QA CAL-23.v3  
Calibration procedure for dosimetric E-field probes**

Calibration date: **September 3, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	1-Jul-08 (No. 217-00865)	Jul-09
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	1-Jul-08 (No. 217-00866)	Jul-09
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

Calibrated by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Approved by:	Name	Function	Signature
	Fin Bomholt	R&D Director	

Issued: September 3, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

**Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

EX3DV4 SN:3660

September 3, 2008

# Probe EX3DV4

## SN:3660

Manufactured:	April 29, 2008
Calibrated:	September 3, 2008

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)




EX3DV4 SN:3660

September 3, 2008

### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

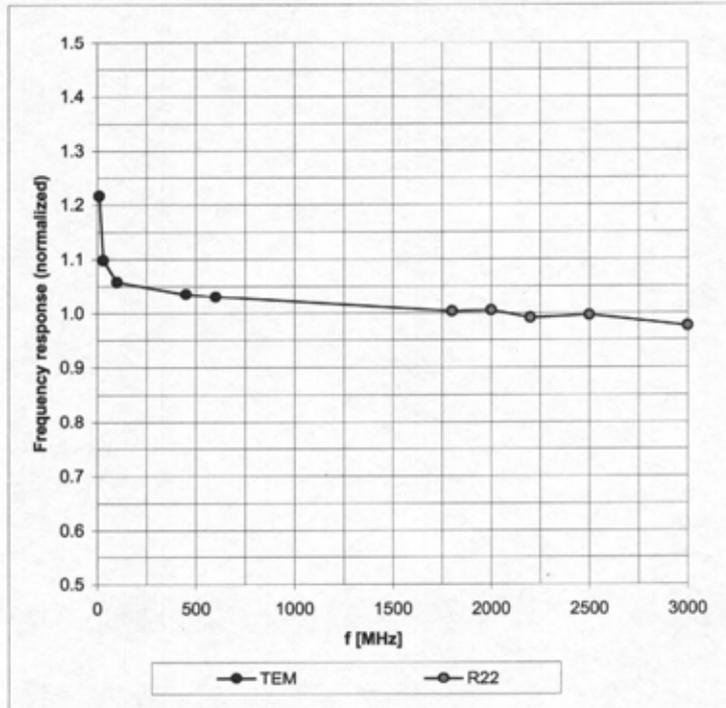

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)