



Report No: CSBG (R) 82112005
FCC ID: QISEC321

**FCC TEST REPORT OF
HUAWEI EC321
CDMA DATA CARD**

M/N: EC321

Nov. 28, 2005

Reliability Laboratory of Huawei Technologies Co., Ltd.

All Right Reserved

REPORT ON

FCC Test of HUAWEI EC321 CDMA Data Card

M/N: EC321

Report No: CSBG (R) 820112005

Nov. 28, 2005

REGULATION

FCC CFR47 Part 2: Subpart J;

FCC CFR47 Part 22: Subpart H;

FCC CFR47 Part 15: Subpart B;

CONCLUSION

There are 7 items need to be tested, 7 items have been tested. The sample of the model completely meets the requirements

Final Judgement: Pass

General Manager

2004.12.16

Date

Tang Shuanli

Name

signature



**Technical Responsibility
For Area of Testing**

2004.12.15

Date

Zhang Xinghai

Name

signature



Test Lab Engineer

2004.12.13

Date

Deng Jiang

Name

signature



CONTENTS

1	Summary.....	4
2	Product Description	5
3	Test Site Description.....	6
3.1	Testing Period.....	6
3.2	General Set up Description	6
4	Product Description	7
4.1	Technical Characteristics	7
4.2	EUT Identification List.....	9
5	Transmitter Measurements.....	10
5.1	Effective Radiated Power	10
5.2	Modulation Characteristics	14
5.3	Occupied Bandwidth.....	17
5.4	Spurious Emission at Antenna Terminal	20
5.5	Field Strength of Spurious Radiation.....	24
5.6	Frequency Stability	29
6	EMC Test	35
6.1	Conducted Emission at Power Port.....	35
6.2	Radiated Emission of Enclosure at ideal mode.....	36
7	Appendixes	40

1 Summary

The table below summarizes the measurements and results for the Huawei CDMA data card. Detailed results and descriptions are shown in the following pages.

FCC Measurement Specification	FCC Limits Part(s)	Description	Result
2.1046	22.913	Effective radiated power limits.	PASS
2.1047	22.901	Modulation Characteristics	PASS
2.1049	22.917	Occupied Bandwidth	PASS
2.1051	22.917(e)	Spurious Emission at Antenna Terminals	PASS
2.1053	22.917(e)	Field Strength of Spurious Emissions	PASS
2.1055	22.355	Frequency Stability	PASS
-	15.107	Conducted limits	NA
-	15.109	Radiated emission limits	PASS

2 Product Description

HUAWEI CDMA Data card EC321 is subscriber equipment in the CDMA system. The frequency band is Band Class 0 (cellular band). EC321 implements such functions as RF signal receiving / Transmitting, CDMA protocol processing, voice and SMS service etc. EC321 uses MSM6000 chipset and Zero-IF technologies.

3 Test Site Description

The test site of:

***Huawei Technologies Co. Ltd.
P.O. Box 518129
Huawei base, bantian,
Longgang District, Shenzhen, China***

The test site description has been submitted to  and registration granted under the registration number **97456** on March 11, 2003. The test site has been

accredited by  and the accredited number is **2714.01** in Jan of 2004.

3.1 Testing Period

The test have been performed during the period of

Feb 25, 2005 to Mar 15, 2005

3.2 General Set up Description

Huawei CDMA data card EC321 can only support CDMA mode and Band Class 0(Cellular Band). During this measurement, the data card just works in CDMA mode and band class 0.

4 Product Description

4.1 Technical Characteristics

4.1.1 Frequency Range

Uplink band	824 to 849 MHz
Downlink band	869 to 894 MHz

4.1.2 Channel Spacing / Separation

Channel spacing:	30KHz
Channel separation	1.23MHz

4.1.3 Type of Emission

Emission Designation:	1M25F9W
-----------------------	----------------

According to CFR 47 (FCC) part 2, subpart C, section 2.201 and 2.202

4.1.4 Environmental Requirements

Minimum temperature:	- 10 °C
Maximum temperature:	+ 55 °C
Relative Humidity:	5%~95%RH

4.1.5 Power Source

DC voltage nominal:	3.3VDC
DC voltage range	3.0V ~ 3.6VDC
DC current maximal:	750mA

4.1.6 Tune-up Procedure

According to CFR (FCC) part 2, subpart 2, section 2.1033 (9)

Please reference the document Tune-up Procedure in TCF.

4.1.7 Applied DC Voltages and Currents

According to CFR (FCC) part 2, subpart 2, section 2.1033 (8)

The voltage and current in the final RF stage is:

Voltage: 3.3VDC

Current: 750mA According to CFR (FCC) part 2, subpart 2, section 2.1033 (8)

4.2 EUT Identification List

4.2.1 Board Information

HUAWEI EC321 CDMA Data Card
EC321

Board and Module		
Equipment Designation / Description	Serial Number	Remarks
-Connect board	0287047N53008265	WL21CIPU
-Main board	0277057N53008232	WL32TCPU

4.2.2 Adapter Technical Data

Not Application for Data Card.

4.2.3 Battery Technical Data

Not Application for Data Card.

4.2.4 FCC Identification

Grantee Code: QIS
Product Code: EC321
FCC Identification: QISEC321

5 Transmitter Measurements

5.1 Effective Radiated Power

5.1.1 Test Conditions

Preconditioning:	1 hour
Maximum Specified Transmitter Power:	23~30dBm
Ambient temperature:	24.5°C
Relative humidity:	57%

5.1.2 Test Specifications and Limits

5.1.2.1 Specification

CFR 47 (FCC) part 2.1046 and part 22.913

5.1.2.2 Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
3GPP2 C.S0011-B	Recommended Minimum Performance Standards for cdma2000 Spectrum Mobile Standards. Release B

5.1.2.3 Limits

Compliance with 22.913 requires in no any case may the peak power of a Mobile Station transmitter exceed 7 W. And calculate longitude ERP by following formula: $ERP(\text{dBm}) = 10 \cdot \log(ERP_{\text{in watts}})$.

Max. Effective Radiated Power(Watts)	< 7 Watts
--------------------------------------	-----------


Max. Effective Radiated Power(dBm)	< 38.5 dBm
------------------------------------	------------

5.1.3 Test Method and Setup


- (1) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, E.R.P. shall be measured when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in 2.1033(c)(9). Connect the handset to the wireless communication tester Agilent 8960 via the air interface. The band class is set as US Cellular.
- (2) Test the Radiated maximum output power by the Agilent 8960 received from test antenna.
- (3) Use substitution method to verify the Maximum output power. The EUT is substituted by a dipole antenna. The dipole is connected to a signal generator. And then adjust the output level of the signal generator to get the same received power recorded in step (b) on Agilent 8960, and record the power level of Signal Generator. Of course, the cable loss at the test frequency should be compensated.

Test setup

Step 1: find the maximum E.R.P.

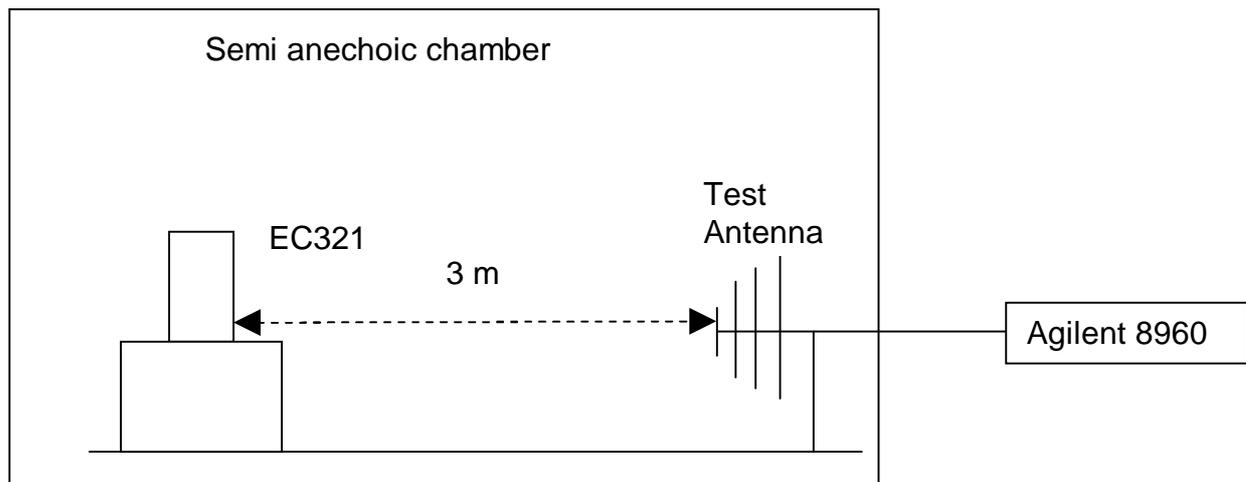

Step 2: substitution method

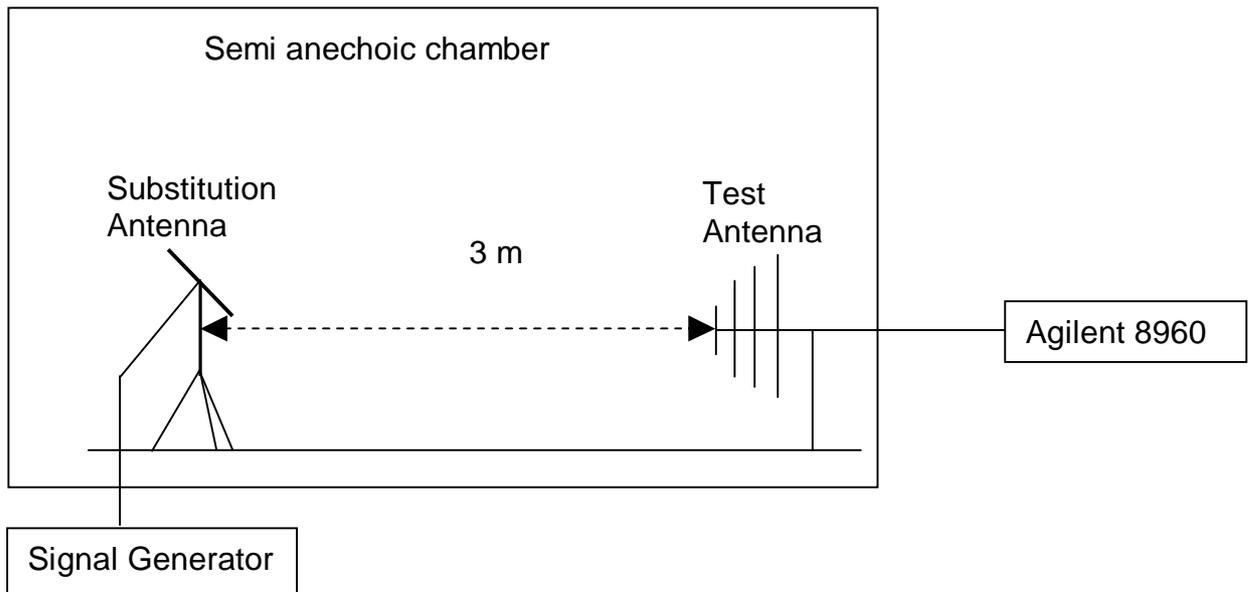

5.1.4 Measurement Results

TEST CONDITIONS		RF Output Power					
		Channel1013 824.7MHz		Channel283 833.49Mhz		Channel777 848.31MHz	
		dBm		dBm		dBm	
		Measured	Limit	Measured	Limit	Measured	Limit
RC1	T _{nom} (25 °C) V _{nom} (3.3 V)	24.62	23~30	24.41	23~30	24.33	23~30
RC3	T _{nom} (25 °C) V _{nom} (3.3 V)	24.57	23~30	24.42	23~30	24.38	23~30
Measurement uncertainty (dB)		Equipment			Requirement		
		0.4 dB			N/A		

5.1.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix A with 7 pages.

5.1.6 Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Wireless communications test set	Agilent	8960	GB43042699	2006.04.15
Cable	Diverse	RG58-U	n.a	Before test
Signal Generator	R&S	SMT 06 1039.2000.0 6	830723/007	2006.05.30
BiLog Antenna	Schaffner	CBL 6112B	2536	2006.05.05
Pre-Amplifier	Agilent	83017A	3950M00246	2006.05.30

5.2 Modulation Characteristics

5.2.1 Test Conditions

Preconditioning:	1 hour
Maximum Specified Transmitter Power:	23~30dBm
Measured at:	Antenna connector
Ambient temperature:	24 °C
Relative humidity:	57 %

5.2.2 Test Specifications and Limits

5.2.2.1 Specification

CFR 47 (FCC) part 2.1047 and part 22.917

5.2.2.2 Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
3GPP2 C.S0011-B	Recommended Minimum Performance Standards for cdma2000 Spectrum Mobile Standards. Release B

5.2.2.3 Limits


Compliance with 22.915 requires not a specific modulation characteristic since the EUT is applied for 22.901(d)

Limits	Not applicable
--------	----------------

5.2.3 Test Method and Setup

Connect the data card to the wireless communication test set 8960 via the antenna connector. The band class is set as US Cellular. Test the waveform quality of the data card by the 8960. The EC321's output is matched with 50 Ω load.

Test setup

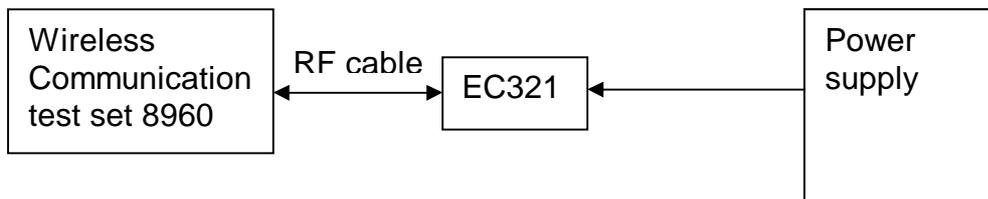

5.2.4 Measurement Results

TEST CONDITIONS		Rho(RC1/1)					
		Channel1013 824.7MHz		Channel283 833.49Mhz		Channel777 848.31MHz	
		N/A		N/A		N/A	
		Measured	Limit	Measured	Limit	Measured	Limit
T_{nom} (25 °C)	V_{nom} (3.3V)	0.9984	0.9440	0.9957	0.9440	0.9972	0.9440
Measurement uncertainty		Equipment			Requirement		
		0.001			N/A		

TEST CONDITIONS		Rho(RC3/3)					
		Channel1013 824.7MHz		Channel283 833.49Mhz		Channel777 848.31MHz	
		N/A		N/A		N/A	
		Measured	Limit	Measured	Limit	Measured	Limit

T _{nom} (25 °C)	V _{nom} (3.3V)	0.9946	0.9440	0.9963	0.9440	0.9966	0.9440
Measurement uncertainty		Equipment			Requirement		
		0.001			N/A		

5.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix B with 7 pages.

5.2.6 Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Wireless communications test set	Agilent	8960	GB43042699	2006.04.15
Cable	Diverse	RG58-U	n.a	Before test

5.3 Occupied Bandwidth

5.3.1 Test Conditions

Preconditioning:	1 hour
Nominal Output Power:	23 dBm~30dBm
Measured at:	Antenna connector
Ambient temperature:	25 °C
Relative humidity:	55 %

5.3.2 Test Specifications and Limits

5.3.2.1 Specification

CFR 47 (FCC) part 2.1049 and part 22.917

5.3.2.2 Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA: 1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
3GPP2 C.S0011-B:	Recommended Minimum Performance Standards for cdma2000 Spectrum Mobile Standards. Release B

5.3.2.3 Limits

Compliance with 2.1049 requires not a specific occupied bandwidth since the EUT is applied for part 24 subpart E and possesses a digital modulation there is no specific requirement formulated in before mentioned rules the 99% rules applies.

Upper /lower frequency limits	0.5% of the mean power
-------------------------------	------------------------

5.3.3 Test Method and Setup

The OBW, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:


(g) Transmitter in which the modulating base band comprises not more than three independent channels - when modulated by the full complement of signals for which the transmitter is rated. The level of modulation for each channel should be set to that prescribed in rule parts applicable to the services for which the transmitter is intended. If specific modulation levels are not set forth in the rules, the tests should provide the manufacturer’s maximum rated condition.

(h) Transmitters employing digital modulation techniques - when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudorandom generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at discretion of the user.

Measurement bandwidth (RBW): 30 kHz (Resolution bandwidth)
 Video bandwidth (VBW): 300 kHz

Test Set-up

Connect the data card to the wireless communication test set 8960 and the Spectrum Analyzer FSU26 via the divider. The EC321’s output is matched with 50 Ω load.

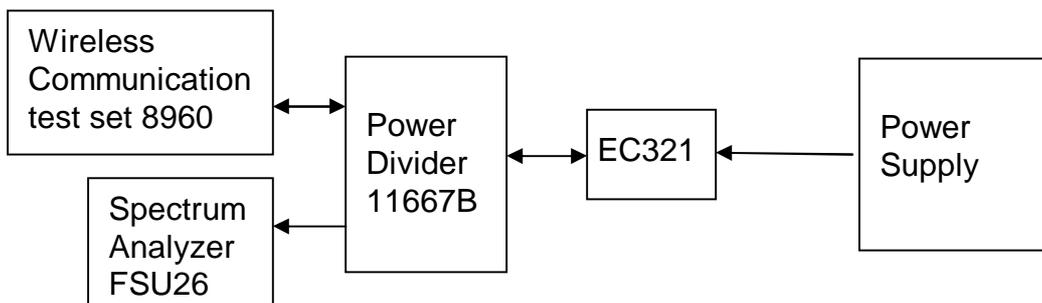

5.3.4 Measurement Results

TEST CONDITIONS		Occupied Bandwidth					
		Channel1013		Channel283		Channel777	
		824.7MHz		833.49MHz		848.31MHz	
		Measured (MHz)	Limit (MHz)	Measured (MHz)	Limit (MHz)	Measured (MHz)	Limit (MHz)
T _{nom} (25 °C)	V _{nom} (3.3 V)	1.2820	1.48	1.2820	1.48	1.2820	1.48
Measurement uncertainty (dB)		Equipment			Requirement		
		0.2%			N/A		

5.3.5 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix C with 4 pages.

5.3.6 Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Wireless communications test set	Agilent	8960	GB43042699	2006.04.15
Cable	Diverse	RG58-U	N/A	Before test
Spectrum Analyzer	R&S	FSU26	838866/039	2006.04.21
Divider	Agilent	11667B	N/A	Before test

5.4 Spurious Emission at Antenna Terminal

5.4.1 Test Conditions

Preconditioning:	1 hour
Nominal Output Power:	24dBm
Measured at:	Antenna connector
Ambient temperature:	23.5°C
Relative humidity:	55 %

5.4.2 Test Specifications and Limits

5.4.2.1 Specification

CFR 47 (FCC) part 2.1051 and part 22.917(e)

5.4.2.2 Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
3GPP2 C.S0011-B	Recommended Minimum Performance Standards for cdma2000 Spectrum Mobile Standards. Release B

5.4.2.3 Limits

Compliance with 22.917 requires that all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Rated Power:	24 dBm
Required attenuation:	$43 + 10 \log_{10} (0.25) = 37$, 24 dBm – 37 dB
Absolute level	- 13 dBm


5.4.3 Test Method and Setup

The wireless communication test set 8960 controls the data card EC321.

Measurement bandwidth (RBW) for up to 150kHz adjacent to carrier: 1 kHz;
 Measurement bandwidth (RBW) for 150kHz up to 30 MHz: 10 kHz;
 Measurement bandwidth (RBW) for 30MHz up to 1 GHz: 100 kHz;
 Measurement bandwidth (RBW) for all others frequencies above 1GHz: 1MHz

Test Set-up

Connect the data card to the wireless communication test set 8960 and the Spectrum Analyzer FSU26 via a power divider. The EC321's output is matched with 50 Ω load.

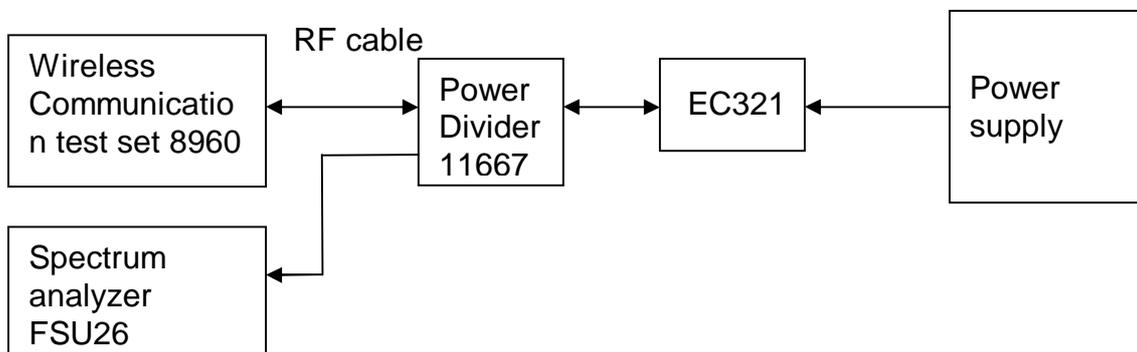

5.4.4 Measurement Results at Block Edges

Band Subclass 0

Block NO.	Frequency of Block edge [MHz]	Channel Number	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
A" and A	824.025	1013	24	<-13(See appendix D)	- 13 dBm	Pass
	835.005	311	24	<-13(See appendix D)	- 13 dBm	Pass

B	835.005	356	24	<-13(See appendix D)	- 13 dBm	Pass
	844.995	644	24	<-13(See appendix D)	- 13 dBm	Pass
A'	844.995	689	24	<-13(See appendix D)	- 13 dBm	Pass
	846.495	694	24	<-13(See appendix D)	- 13 dBm	Pass
B'	846.495	739	24	<-13(See appendix D)	- 13 dBm	Pass
	848.985	777	24	<-13(See appendix D)	- 13 dBm	Pass

Band Subclass 1

Block NO.	Frequency of Block edge [MHz]	Channel Number	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
A'' and A	824.025	1013	24	<-13(See appendix D)	- 13 dBm	Pass
	835.005	311	24	<-13(See appendix D)	- 13 dBm	Pass
B	835.005	356	24	<-13(See appendix D)	- 13 dBm	Pass
	844.995	644	24	<-13(See appendix D)	- 13 dBm	Pass
A' and A'''	844.995	689	24	<-13(See appendix D)	- 13 dBm	Pass
	848.985	779	24	<-13(See appendix D)	- 13 dBm	Pass

Measurement Uncertainty: 2dB

5.4.5 Measurement Results outside Band Edges

Channel Number	Test Range (Frequency)	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
1013	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
283	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass
777	9 kHz ~12.75GHz	24	<- 13 dBm (See appendix D)	- 13 dBm	Pass

Measurement Uncertainty: 2dB

5.4.6 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix D with 21 pages.

5.4.7 Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Spectrum analyzer	R&S	FSU26	200002	2006.04.21
Wireless communication test set	Agilent	8960	GB4304 2699	2006.04.15
Power Divider	Agilent	11667B	N/A	Before test
Cable	Huber&Suhner	RG58U	N/A	Before test

5.5 Field Strength of Spurious Radiation

5.5.1 Test Conditions

Preconditioning:	0.5 hour
Nominal Output Power:	24 dBm
Measured at:	Channel 283, Frequency 833.49MHz
Ambient temperature:	23 °C
Relative humidity:	51 %

5.5.2 Test Specifications and Limits

5.5.2.1 Specification

CFR 47 (FCC) part 2.1053 and part 22.917(e)

5.5.2.2 Supporting Standards:

EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
EIA/TIA-102-CAAA:1999	Digital C4FM/CQPSK Transceiver Measurement Methods (ANSI/TIA/EIA-102.CAAA-1999)
EIA/TIA -95B-1999	Mobile Station-Base Station Compatibility Standard for Wideband Spread Spectrum Cellular Systems (ANSI/TIA/EIA-95-B-99)
EIA/TIA-97D-2001	Recommended Minimum Performance Standard for Base Stations Supporting Dual-Mode Spread Spectrum Cellular Mobile Stations

5.5.2.3 Limits

Compliance with 22.917 requires that all spurious emission must be attenuated below the transmitter power by at least $43 + 10 \log_{10} P$. (Whereas P is the rated power of the EUT).

Rated Power:	24 dBm (0.25W)
Required attenuation:	$43 + 10 \log_{10} (0.25W) = 37 \text{ dB}$
Absolute level	$24 \text{ dBm} - 37 \text{ dB} = - 13 \text{ dBm}$

5.5.3 Test Method and Setup

(a) Measurements were made to detect spurious emissions radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data were supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph 2.989(c) as appropriate. For equipment operating on frequencies below 890 MHz, an Open Field Test is normally required with the measuring instrument antenna located in the far field at all test frequencies. In event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurement will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections, which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with the reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

(b) Measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emission are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.


The wireless communication test set 8960 controls the HUAWEI CDMAdata card. The antenna port is connected to the 8960. The data card operates on a typical channels.

Measurement bandwidth: 9 kHz – 150 kHz: 1 kHz
 Measurement bandwidth: 150 kHz – 30 MHz: 9 kHz


Measurement bandwidth: 30 MHz – 1000 MHz: 120 kHz
Measurement bandwidth: 1 GHz – 12.75 GHz: 1 MHz

Test set up

Step 1: find the maximum E.R.P.

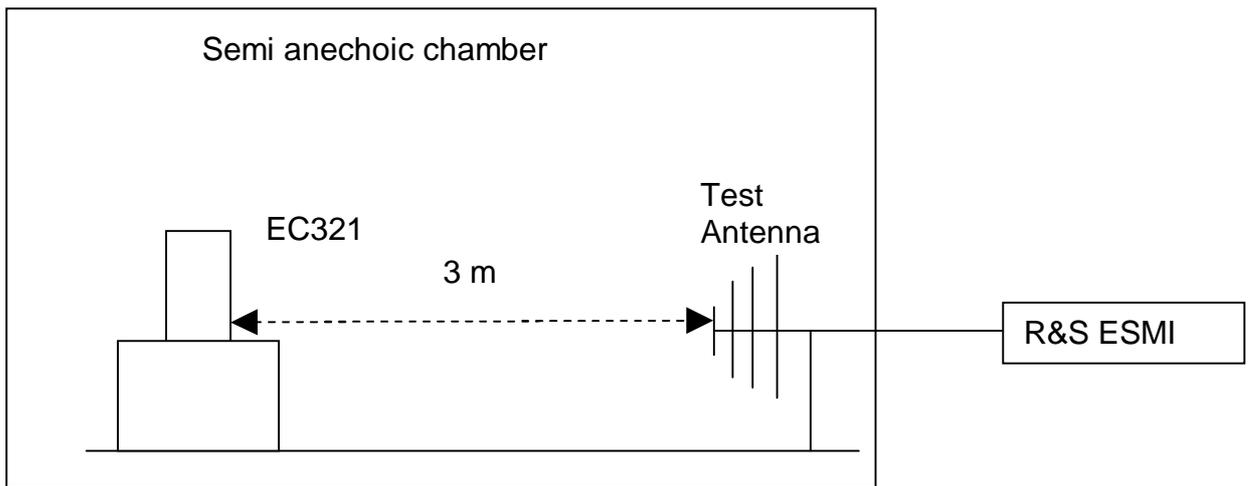

Step 2: substitution method

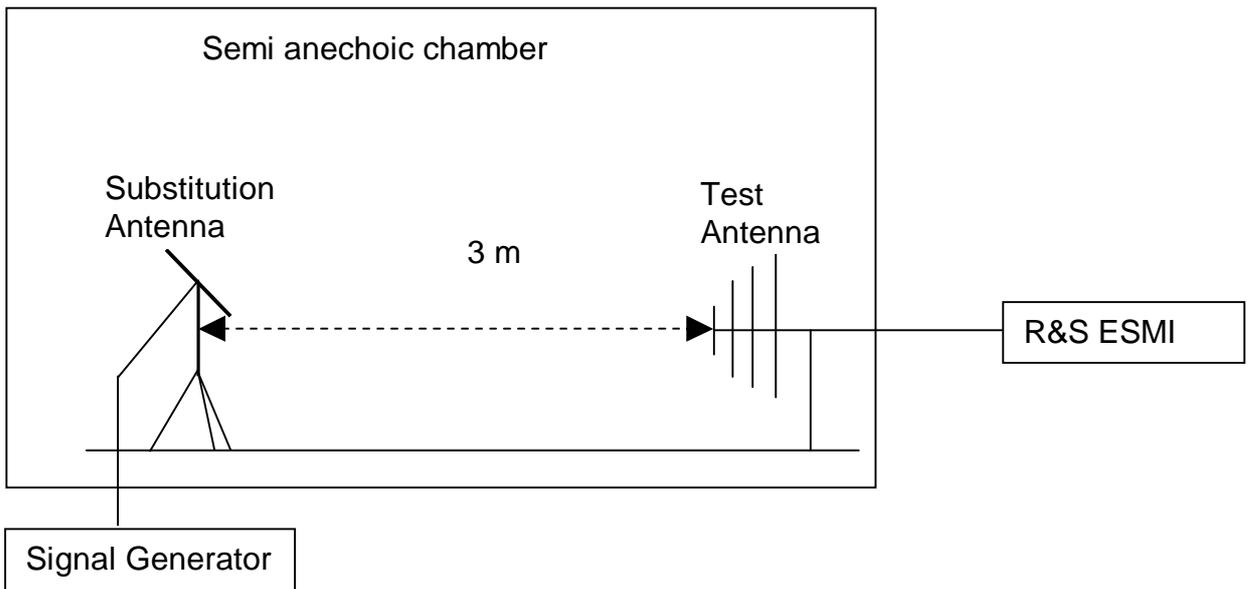

5.5.4 Measurement Results

Channel Number	Test Range (Frequency)	Power [dBm]	Spurious Level measured [dBm]	FCC limit	Result
283	9 kHz ~Hz	24	<- 13 dBm (See appendix E)	- 13 dBm	Pass
283	30MHz ~1GHz	24	<- 13 dBm (See appendix E)	- 13 dBm	Pass
283	1GHz ~12.75Hz	24	<- 13 dBm (See appendix E)	- 13 dBm	Pass

Measurement Uncertainty: 5 dB

5.5.5 Substitution Results

No spurious peak found.

Calculation Sample:

Freq. [MHz]	Substitution Antenna Type	Measurement Result [dBm]	Gain [dBd]	Cable Loss [dB]	Signal Generator Level [dBm]	Substitution Level [dBm]	FCC limit [dBm]	Result
3916.66	Horn Ant.	-38.93	7.85	2.20	-42.88	-37.23	-13	Pass

Note: For get the E.R.P. (Efficient Radiated Power) in substitution method, the following formula should take to calculate it,

$$E.R.P. [dBm] = SGP [dBm] - Cable Loss [dB] + Gain [dBd]$$

NOTE: SGP-- Signal Generator Level

5.5.6 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix E with 7 pages.

5.5.7 Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Signal Generator	R&S	SMT 06 1039.2000.06	830723/007	2006.05.30
Test Receiver Display Unit	R&S	ESMI 804.8932.52	829214/011	2006.05.30
Test Receiver RF Unit	R&S	ESMI 1032.5640.53	829550/008	2006.05.30
BiLog Antenna	Schaffner	CBL 6112B	2536	2006.05.05
Pre-Amplifier	Agilent	83017A	3950M00246	2006.05.30
Horn Antenna	R&S	HF906 4044.4507.02	359287/005	2006.05.30
Attenuator	HP	8491A (3dB)	36239	Calibrated with setup
Horn Antenna	R&S	HF906 4044.4507.02	359287/006	2006.05.30

5.6 Frequency Stability

5.6.1 Test Conditions

Preconditioning:	1 hour
Nominal Output Power:	24dBm
Measured at:	Antenna connector
Ambient temperature:	See below
Relative humidity:	55 % at 20 °C

5.6.2 Test Specifications and Limits

CFR 47 (FCC) part 2.1055 and part 24.235

5.6.2.1 Supporting Standards:

ANSI C63.4-1992	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
EIA/TIA-603-A: 1992	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards
3GPP2 C.S0011-B	Recommended Minimum Performance Standards for cdma2000 Spectrum Mobile Standards. Release B

5.6.3 Test Method and Setup

The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From -30° to $+50^{\circ}$ centigrade for all equipment except that specified in subparagraphs
- (2) and (3) of paragraph 2.1055

(b) Frequency measurements shall be made at the extremes of the specified temperature range and at intervals of not more than 10o centigrade through the range. A period of time sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. The short-term transient effects on the frequency of the transmitter due to keying (except for broadcast transmitters) and any heating element cycling normally occurring at each ambient temperature level also shall be shown. Only the portion or portions of the transmitter containing the frequency determining and stabilizing circuitry need be subjected to the temperature variation test.

(d) The frequency stability shall be measured with variation of primary supply voltage as follows:


- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.
- (2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- (3) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.

(e) When deemed necessary, the Commission may require tests of frequency stability under conditions in addition to those specifically set out in paragraphs (a), (b), (c) and (d) of this section. (For example, measurements showing the effect of proximity to large metal objects, or of various types of antennas, may be required for portable equipment.)

Test Set up

Measurement Bandwidth: 30 kHz

Connect the data card to the wireless communication test set 8960 via the antenna connector. Test the frequency error by the 8960. The EC321's output is matched with 50 Ω load.

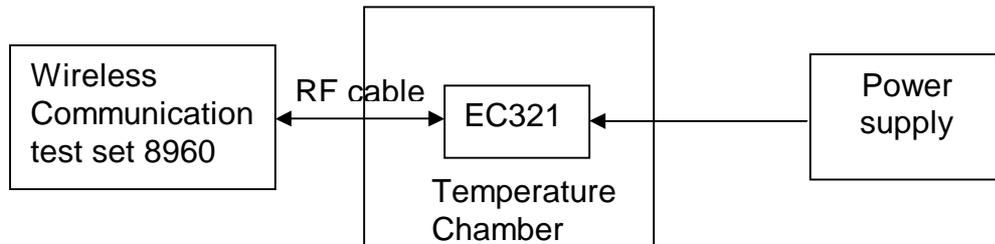

5.6.4 Measurement Results vs. Variation of Temperature

I TRX1: Channel No.1013(824.7MHz)

Temperature	Power (dBm)	Nominal Frequency (MHz)	RC1/1 Measured Frequency Error(Hz)	RC3/3 Measured Frequency Error(Hz)	Result
-30 °C	24	824.7	0.8	-0.9	Pass
-20 °C	24	824.7	-0.1	-2.1	Pass
-10 °C	24	824.7	2.0	2.5	Pass
0 °C	24	824.7	2.5	-0.4	Pass
+10 °C	24	824.7	-1.8	1.3	Pass
+20 °C	24	824.7	-3.8	1.4	Pass
+30 °C	24	824.7	-0.6	-0.4	Pass
+40 °C	24	824.7	5.5	0.2	Pass
+50 °C	24	824.7	-1.4	1.3	Pass

I TRX2: Channel No.283(833.49MHz)

Temperature	Power (dBm)	Nominal Frequency	RC1/1 Measured Frequency	RC3/3 Measured Frequency	Result
-------------	-------------	-------------------	--------------------------	--------------------------	--------

		(MHz)	Error(Hz)	Error(Hz)	
-30 °C	24	833.49	-2.8	0.0	Pass
-20 °C	24	833.49	1.3	-0.1	Pass
-10 °C	24	833.49	3.3	4.9	Pass
0 °C	24	833.49	-4.0	-0.3	Pass
+10 °C	24	833.49	1.3	-1.1	Pass
+20 °C	24	833.49	-0.7	1.5	Pass
+30 °C	24	833.49	3.3	-0.3	Pass
+40 °C	24	833.49	1.3	0.4	Pass
+50 °C	24	833.49	-0.1	-1.1	Pass

I TRX3: Channel No.777(848.31MHz)

Temperature	Power (dBm)	Nominal Frequency (MHz)	RC1/1 Measured Frequency Error(Hz)	RC3/3 Measured Frequency Error(Hz)	Result
-30 °C	24	848.31	2.2	1.6	Pass
-20 °C	24	848.31	-4.1	6.0	Pass
-10 °C	24	848.31	-1.4	5.3	Pass
0 °C	24	848.31	0.6	3.9	Pass
+10 °C	24	848.31	4.0	0.1	Pass
+20 °C	24	848.31	4.0	1.7	Pass
+30 °C	24	848.31	4.7	3.9	Pass
+40 °C	24	848.31	2.2	-3.4	Pass
+50 °C	24	848.31	-4.1	0.1	Pass

5.6.5 Measurement Results vs. Variation of Voltage

I TRX1: Channel No. 1013(824.7MHz)

Voltage	Power (dBm)	Nominal Frequency (MHz)	RC1/1 Measured Frequency Error(Hz)	RC3/3 Measured Frequency Error(Hz)	Result
3.0v	24	824.7	-3.8	-6.2	Pass
3.3v	24	824.7	2.5	1.4	Pass
3.6v	24	824.7	4.6	1.1	Pass

I TRX2: Channel No. **283(833.49MHz)**

Voltage	Power (dBm)	Nominal Frequency (MHz)	RC1/1 Measured Frequency Error(Hz)	RC3/3 Measured Frequency Error(Hz)	Result
3.0v	24	833.49	-0.7	1.4	Pass
3.3v	24	833.49	-4.0	1.5	Pass
3.6v	24	833.49	-1.5	3.7	Pass

I TRX3: Channel No. **777(848.31MHz)**

Voltage	Power (dBm)	Nominal Frequency (MHz)	RC1/1 Measured Frequency Error(Hz)	RC3/3 Measured Frequency Error(Hz)	Result
3.0v	24	833.49	4.0	-0.6	Pass
3.3v	24	833.49	0.6	1.7	Pass
3.6v	24	833.49	6.9	4.7	Pass

5.6.6 Conclusion

The equipment **PASSED** the requirement of this clause.

For the measurement results refer to appendix F with 73 pages.

5.6.7 Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Wireless communication test set	Agilent	8960	GB43042699	2006.04.15
Cable	Diverse	RG58-U	n.a.	Before test
Climatic Chamber	Weiss	WT11 340	588226027740030	2006.01.18

6 EMC Test

6.1 Conducted Emission at Power Port

Not Application for Data Card.

6.2 Radiated Emission of Enclosure at ideal mode

6.2.1 Test Conditions

Preconditioning:	0.5 hour
Nominal Output Power:	24 dBm
Measured at:	Channel 283, Frequency 833.49MHz
Ambient temperature:	23 °C
Relative humidity:	51 %

6.2.2 Test Specifications and Limits

6.2.2.1 Specification

CFR 47 (FCC) part 15.109

6.2.2.2 Supporting Standards:

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
------------------	--

6.2.2.3 Limits

The Radiated Emission of Enclosure of EUT should compliance with the requirement of CFR 15.107. The limit showed in following table.

Frequency of Emission (MHz)	Radiated Limit	
	Unit(μ v/m)	Unit(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
960-1000	500	54

6.2.3 Test Method and Setup

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The test distance was 3m. The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to EN 55022/CISPR 22


The Radiated Disturbance measurements were made using a Rohde and Schwarz ESMI Test Receiver and control software ES-K1.

A preliminary scan and a final scan of the emissions was made from 30 MHz to 1GHz by using test script of software; the emissions were measured using a Quasi-Peak Detector. The maximal emission value was acquired by adjusting the antenna height, polarisation and turntable azimuth in accordance with the software setup. Normally, the height range of antenna was 1m to 4m, the azimuth range of turntable was 0° to 360°, The receive antenna has two polarizations V and H.

HUAWEI CDMA data card EC321 was communicated with the BTS simulator through Air interface. The EC321 operated on the typical channel.

Measurement bandwidth: 30 MHz – 1000 MHz: 120 kHz

Test set up

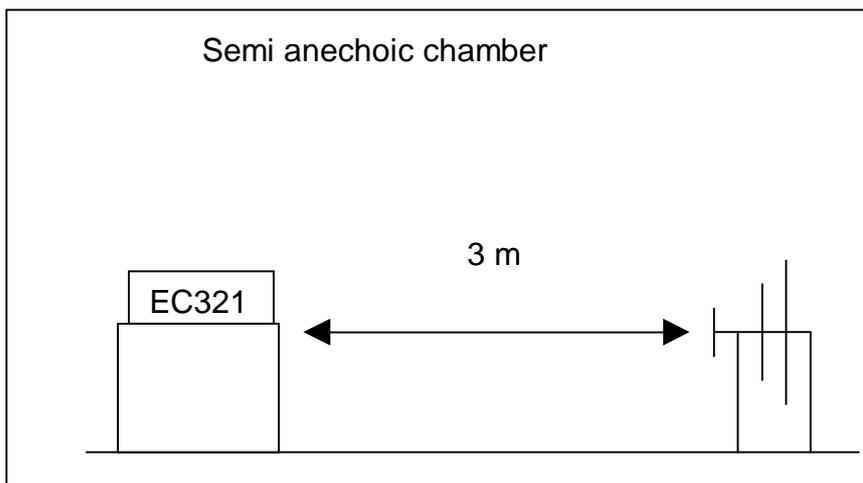

6.2.4 Measurement Results

MEASUREMENT RESULT:

Frequency (MHz)	Level (dBµV/m)	Trans d (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Polarisation
166.200000	26.90	-11.4	40.0	13.1	189.0	60.00	HORIZONTAL L
333.720000	36.50	-5.3	47.0	10.5	100.0	12.00	HORIZONTAL L
871.500000	40.50	2.6	47.0	6.5	210.0	226.00	VERTICAL

Measurement Uncertainty: 5 dB

6.2.5 Conclusion

The equipment **PASSED** the requirement of this clause.
For the measurement results refer to appendix E with 2 pages.

6.2.6 Equipment List

Equipment Description	Manufacturer	Model	Serial Number	Calibrated until
Test Receiver Display Unit	R&S	ESMI 804.8932.52	829214/011	2006.05.30
Test Receiver RF Unit	R&S	ESMI 1032.5640.53	829550/008	2006.05.30
BiLog Antenna	Schaffner	CBL 6111B	2536	2006.05.05
Pre-Amplifier	Agilent	83017A	3950M00246	2006.05.30
Horn Antenna	R&S	HF906 4044.4507.02	359287/005	2006.05.30
Attenuator	HP	8491A (3dB)	36239	Calibrated



				with setup
Horn Antenna	R&S	HF906 4044.4507.02	359287/006	2006.05.30

7 Appendixes

Appendix A	Measurement Results RF Output Power	7 pages
Appendix B	Measurement Results Modulation Characteristics	7 pages
Appendix C	Measurement Results Occupied Bandwidth	4 pages
Appendix D	Measurement Results Spurious Emission at Antenna Terminal	53 pages
Appendix E	Measurement Results Field Strength of Spurious Radiation	7 pages
Appendix F	Measurement Results Frequency Stability versus Temperature and Voltage	73 pages
Appendix G	Measurement Results Conducted Emission at Power Port	2 pages
Appendix H	Measurement Results Radiated Emission of Enclosure at ideal mode	2 pages
Appendix G	Photos of Test Setup	4 pages