

Appendix F. FCC 3G SAR Measurement Procedures

Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSPA function is Release 6 version supporting HSDPA Category 8, and HSUPA Category 5. A detailed analysis of the output power for all WCDMA, HSPDA, and HSPA (HSUPA&HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures, and the EUT does not support VOIP function over the HSPA function. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table. Power values for HSPA are less than ¼ dB higher than the basic 12.2 kbps RMC configurations in WCDMA.

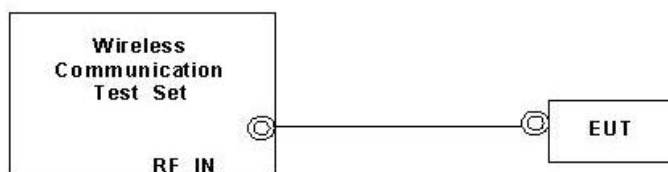
WCDMA SAR Test mode - Conducted Power							
Mode	Setup	Cell band (850)			PCS band (1900)		
		CH4132	CH4182	CH4233	CH9262	CH9400	CH9538
		826.4 (MHz)	836.4 (MHz)	846.6 (MHz)	1852.4 (MHz)	1880.0 (MHz)	1907.6 (MHz)
WCDMA	RMC 12.2Kbps	22.24	22.23	21.93	21.88	22.33	21.96
HSDPA	Subtest 1	21.46	21.58	21.76	22.11	21.70	20.72
	Subtest 2	21.34	21.36	21.63	21.95	21.57	20.60
	Subtest 3	21.36	21.37	21.58	21.97	21.65	20.82
	Subtest 4	21.31	21.29	21.51	21.91	21.57	20.73
HSUPA	Subtest 1	21.32	21.04	21.22	21.42	21.52	21.69
	Subtest 2	19.32	19.85	19.42	19.77	19.49	18.97
	Subtest 3	20.16	20.19	20.00	20.49	20.46	19.49
	Subtest 4	19.42	20.08	19.59	20.10	19.54	19.10
	Subtest 5	21.35	20.98	21.34	20.86	21.64	19.96
MPR for HSUPA	Subtest 1	0.02	0.32	0.41	0.53	0.05	-1.09
	Subtest 2	2.02	1.51	2.21	2.18	2.08	1.63
	Subtest 3	1.18	1.17	1.63	1.46	1.11	1.11
	Subtest 4	1.92	1.28	2.04	1.85	2.03	1.50
	Subtest 5	-0.01	0.38	0.29	1.09	-0.07	0.64



WCDMA SAR Test mode - Conducted Power				
Mode	Setup	AWS band (1700)		
		CH1312	CH1413	CH1513
		1712.4 (MHz)	1732.6 (MHz)	1752.6 (MHz)
WCDMA	RMC 12.2Kbps	22.37	22.18	21.98
HSDPA	Subtest 1	21.41	21.21	21.02
	Subtest 2	21.55	21.24	20.87
	Subtest 3	21.54	21.35	20.95
	Subtest 4	21.51	21.31	21.02
HSUPA	Subtest 1	21.01	20.84	20.82
	Subtest 2	18.96	18.62	18.51
	Subtest 3	19.97	20.15	19.71
	Subtest 4	20.03	19.74	19.59
	Subtest 5	21.00	20.72	20.56
MPR for HSUPA	Subtest 1	0.54	0.40	0.05
	Subtest 2	2.59	2.62	2.36
	Subtest 3	1.58	1.09	1.16
	Subtest 4	1.52	1.50	1.28
	Subtest 5	0.55	0.52	0.31

WCDMA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
 - i. Data rates: Varied from RMC 12.2Kbps
 - ii. RMC Test Loop = Loop Mode 1
 - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Setup Configuration**

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSPA (HSUPA & HSPDA) Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

Setup Configuration

Note: For details settings in the Agilent 8960 test equipment, please refer to the user guide “ HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18”

Call Setup Screen									
Call Control		Active Cell Operating Mode						Call Parms	
Channel (UARFCN) Info		UE Information						Cell Power	
		INSI: INEI: Power Class:						-86.00	
Cell Parameters		UE Expected Open Loop Transmit Power						dBm/3.84 MHz	
		Initial PRACH TX Power: -11.70 dBm Initial DPCH TX Power: -0.56 dBm						Channel Type	
Generator Info								12.2k + HSPA	
		Uplink Parameters						Paging Service	
		Value						RB Test Mode	
Uplink Parameters		PRACH Preambles						64	
		PRACH Ramping Cycles(NMAX)						2	
		Available Subchannels (Bit Mask)						000000000001	
UE Rep Neas		Uplink DPCH Scrambling Code						0	
		Uplink DPCH Bc/Bd Control						Manual	
		Manual Uplink DPCH Bc						11	
Close Menu		Manual Uplink DPCH Bd						15	
		Maximum Uplink Transmit Power Level						21 dBm	
		Active Cell						Sys Type: UTRA FDD	
		Idle							
2 of 4		IntRef Offset						1 of 3	

Example for HSPA Subtest 1, and other subtests following table, C11.1.3
(Gain Factors ($\beta_c = 11$ and $\beta_d = 15$))

Call Setup Screen									
Call Control		Active Cell Operating Mode						Serving Grant	
Additional Screens		UE Information						AG Mode	
		INSI: INEI: Power Class:						Single Shot	
Cell Parameters		UE Expected Open Loop Transmit Power						Single Shot AG	
		Initial PRACH TX Power: -11.70 dBm Initial DPCH TX Power: -0.56 dBm						20: (119/15)^2	
Generator Info		Call Processing Status						Send Single Shot Absolute Grant	
		Current Service Type: None MM Status: Abs Single Shot AG GMM State: Index 15: (67/15)^2 Current DPCH: Index 16: (75/15)^2 HSUPA In: Index 17: (84/15)^2 UE Rep E-DCH: Index 18: (95/15)^2 Last Received: Index 19: (106/15)^2 Throughput: Index 20: (119/15)^2 ACKs Transmitted:						Send Relative Grant Up	
Uplink Parameters		Information						Send Relative Grant Down	
		OSCH Cat: ---- Ratio: ---- % kbps Transmitted: ----						Return	
UE Rep Neas		Active Cell						Sys Type: UTRA FDD	
		Idle							
Trig Output Setup		IntRef Offset						1 of 2	
Sys Frame Clock									
2 of 4									

Example: AG – Index = 20 for HSPA subtest 1

Call Setup Screen																																																																																																												
Screen Ctrl	Recorded E-TFCI Information							E-TFCI Record																																																																																																				
Channel (UARFCN) Info	E-TFCI Recording State Idle Recorded E-TFCI Values <table border="1"> <tr><td>1:</td><td>75</td><td>11:</td><td>75</td><td>21:</td><td>----</td><td>31:</td><td>----</td><td>41:</td><td>----</td></tr> <tr><td>2:</td><td>75</td><td>12:</td><td>75</td><td>22:</td><td>----</td><td>32:</td><td>----</td><td>42:</td><td>----</td></tr> <tr><td>3:</td><td>75</td><td>13:</td><td>75</td><td>23:</td><td>----</td><td>33:</td><td>----</td><td>43:</td><td>----</td></tr> <tr><td>4:</td><td>75</td><td>14:</td><td>75</td><td>24:</td><td>----</td><td>34:</td><td>----</td><td>44:</td><td>----</td></tr> <tr><td>5:</td><td>75</td><td>15:</td><td>75</td><td>25:</td><td>----</td><td>35:</td><td>----</td><td>45:</td><td>----</td></tr> <tr><td>6:</td><td>75</td><td>16:</td><td>----</td><td>26:</td><td>----</td><td>36:</td><td>----</td><td>46:</td><td>----</td></tr> <tr><td>7:</td><td>75</td><td>17:</td><td>----</td><td>27:</td><td>----</td><td>37:</td><td>----</td><td>47:</td><td>----</td></tr> <tr><td>8:</td><td>75</td><td>18:</td><td>----</td><td>28:</td><td>----</td><td>38:</td><td>----</td><td>48:</td><td>----</td></tr> <tr><td>9:</td><td>75</td><td>19:</td><td>----</td><td>29:</td><td>----</td><td>39:</td><td>----</td><td>49:</td><td>----</td></tr> <tr><td>10:</td><td>75</td><td>20:</td><td>----</td><td>30:</td><td>----</td><td>40:</td><td>----</td><td>50:</td><td>----</td></tr> </table> 15/15							1:	75	11:	75	21:	----	31:	----	41:	----	2:	75	12:	75	22:	----	32:	----	42:	----	3:	75	13:	75	23:	----	33:	----	43:	----	4:	75	14:	75	24:	----	34:	----	44:	----	5:	75	15:	75	25:	----	35:	----	45:	----	6:	75	16:	----	26:	----	36:	----	46:	----	7:	75	17:	----	27:	----	37:	----	47:	----	8:	75	18:	----	28:	----	38:	----	48:	----	9:	75	19:	----	29:	----	39:	----	49:	----	10:	75	20:	----	30:	----	40:	----	50:	----	E-TFCI Rec Count
1:								75	11:	75	21:	----	31:	----	41:	----																																																																																												
2:								75	12:	75	22:	----	32:	----	42:	----																																																																																												
3:								75	13:	75	23:	----	33:	----	43:	----																																																																																												
4:	75	14:	75	24:	----	34:	----	44:	----																																																																																																			
5:	75	15:	75	25:	----	35:	----	45:	----																																																																																																			
6:	75	16:	----	26:	----	36:	----	46:	----																																																																																																			
7:	75	17:	----	27:	----	37:	----	47:	----																																																																																																			
8:	75	18:	----	28:	----	38:	----	48:	----																																																																																																			
9:	75	19:	----	29:	----	39:	----	49:	----																																																																																																			
10:	75	20:	----	30:	----	40:	----	50:	----																																																																																																			
		15																																																																																																										
HSPA Information		Start Recording E-TFCI Values																																																																																																										
E-TFCI Recording Information																																																																																																												
Clear UE Info		Send Step Up TPC Bit Pattern																																																																																																										
		Send Step Down TPC Bit Pattern																																																																																																										
Return		Return																																																																																																										
Background Active Cell Connected Sys Type: UTRA FDD IntRef Offset																																																																																																												

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1



Reference:

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18