




Appendix G

Radiated Emission of Enclosure in Idle Mode

According to FCC Part 15.109

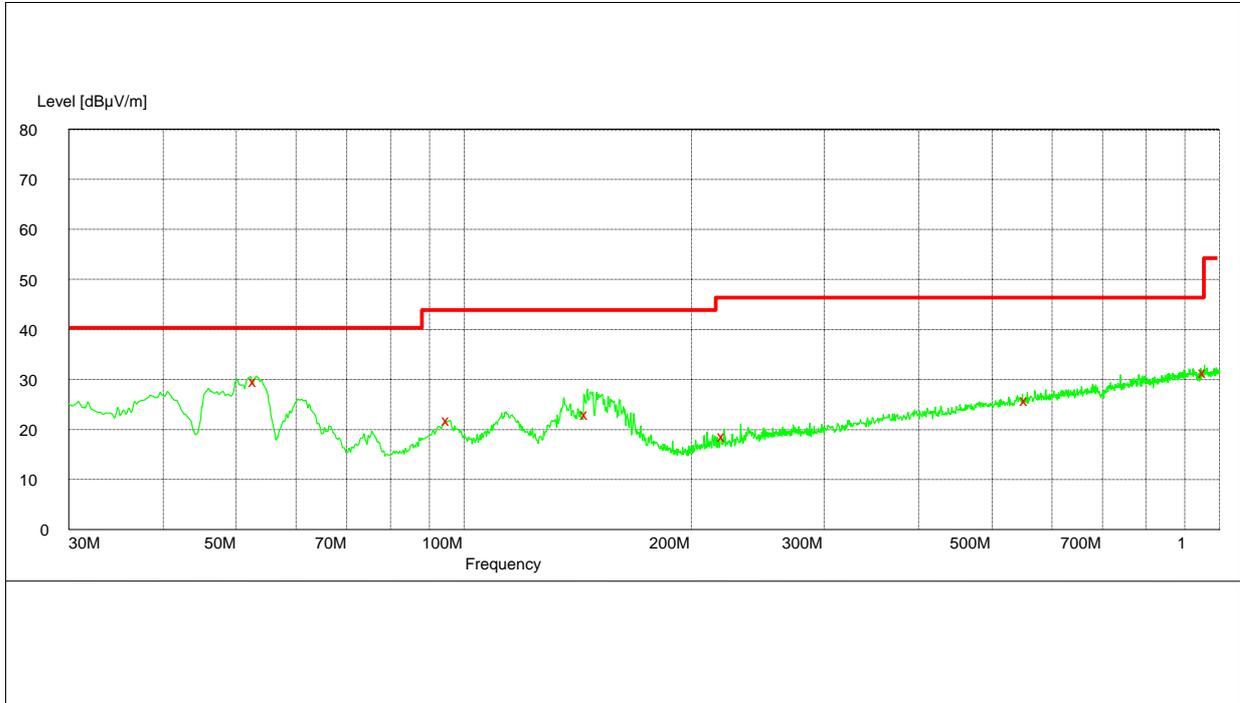

MEASUREMENT RESULT: QP Detector

| Frequency MHz | Level dBµV/m | Transd dB | Limit dBµV/m | Margin dB | Height cm | Azimuth deg | Polarisation |
|---------------|--------------|-----------|--------------|-----------|-----------|-------------|--------------|
| 53.100000 | 29.60 | -16.9 | 40.0 | 10.4 | 112.0 | 57.00 | VERTICAL |
| 95.640000 | 21.00 | -15.9 | 43.5 | 22.5 | 176.0 | 0.00 | HORIZONTAL |
| 145.740000 | 23.20 | -14.7 | 43.5 | 20.3 | 279.0 | 210.00 | HORIZONTAL |
| 221.460000 | 17.80 | -12.7 | 46.0 | 28.2 | 138.0 | 172.00 | HORIZONTAL |
| 556.740000 | 24.90 | -4.5 | 46.0 | 21.1 | 174.0 | 253.00 | HORIZONTAL |
| 958.860000 | 30.80 | 1.6 | 46.0 | 15.2 | 147.0 | 58.00 | VERTICAL |