




Appendix F

Conducted Emission at Power Port

According to FCC Part 15.107

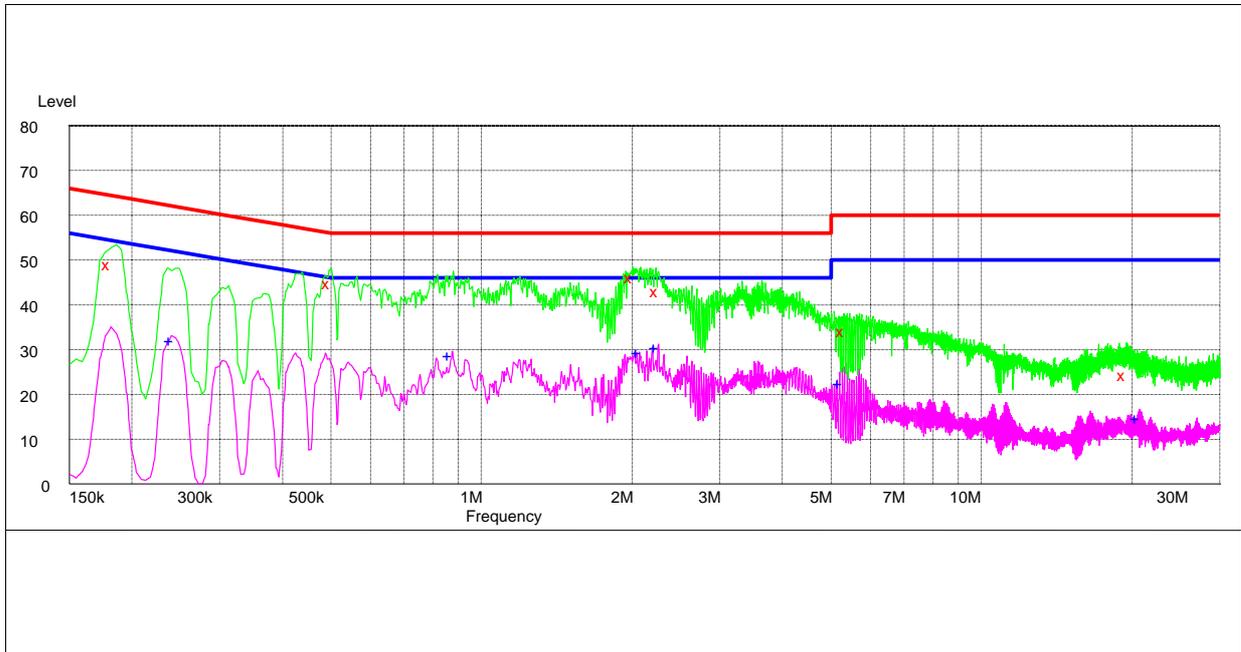

MEASUREMENT RESULT: QP Detector

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.177000	50.40	10.1	65	14.6	N	FLO
0.496500	45.00	10.0	56	11.0	L3	FLO
1.995000	46.40	10.1	56	9.6	L3	FLO
2.247000	43.40	10.1	56	12.6	L3	FLO
5.293500	34.50	10.2	60	25.5	N	FLO
19.333500	24.70	10.3	60	35.3	L3	FLO

MEASUREMENT RESULT: AV Detector

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
0.240000	32.50	10.1	52	19.6	L3	FLO
0.865500	29.10	10.0	46	16.9	L3	FLO
2.067000	29.80	10.1	46	16.2	L3	FLO
2.242500	30.80	10.1	46	15.2	L3	FLO
5.230500	22.80	10.2	50	27.2	L3	FLO
0.240000	32.50	10.1	52	19.6	L3	FLO