



中国认可
国际互认
检测
TESTING
CNAS L0310



FCC SAR Compliance Test Report

Product Name: Smart Phone

Model: EVA-L09

Report No.: SYBH(Z-SAR)014122015-2

FCC ID: QISEVA-L09

	APPROVED (Lab Manager)	PREPARED (Test Engineer)
BY	<i>Wei Huanbin</i>	<i>Li wei</i>
DATE	2016-02-16	2016-02-16

Reliability Laboratory of Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Tel: +86 755 28780808 Fax: +86 755 89652518

※ ※ Notice ※ ※

1. The laboratory has passed the accreditation by China National Accreditation Service for Conformity Assessment (CNAS). The accreditation number is L0310.
2. The laboratory has passed the accreditation by The American Association for Laboratory Accreditation (A2LA). The accreditation number is 2174.01.
3. The laboratory (Reliability Lab of Huawei Technologies Co., Ltd) is also named as “Global Compliance and Testing Center of Huawei Technologies Co., Ltd”, the both names have coexisted since 2009.
4. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
5. The test report is invalid if there is any evidence of erasure and/or falsification.
6. The test report is only valid for the test samples.
7. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.

Table of Contents

1	General Information.....	7
1.1	Statement of Compliance	7
1.2	RF exposure limits	8
1.3	EUT Description	9
1.3.1	General Description	12
1.3.2	TDD LTE specification	13
1.3.3	Power reduction specification	13
1.3.4	Downlink LTE CA specification	14
1.3.5	Dynamic antenna switching specification	17
1.3.6	Dynamic antenna tuning specification	17
1.4	Test specification(s).....	18
1.5	Testing laboratory	18
1.6	Applicant and Manufacturer	18
1.7	Application details	18
1.8	Ambient Condition.....	18
2	SAR Measurement System	19
2.1	SAR Measurement Set-up	19
2.2	Test environment	20
2.3	Data Acquisition Electronics description.....	20
2.4	Probe description	21
2.5	Phantom description	22
2.6	Device holder description	23
2.7	Test Equipment List	24
3	SAR Measurement Procedure	25
3.1	Scanning procedure.....	25
3.2	Spatial Peak SAR Evaluation	26
3.3	Data Storage and Evaluation	27
4	System Verification Procedure	29
4.1	Tissue Verification.....	29
4.2	System Check.....	34
4.3	System check Procedure	36
5	SAR measurement variability and uncertainty	37
5.1	SAR measurement variability	37
5.2	SAR measurement uncertainty.....	37
6	SAR Test Configuration.....	38
6.1	Test Positions Configuration	38
6.1.1	General considerations	38
6.1.2	Head Exposure Condition	38
6.1.3	Body-worn Exposure Condition	39
6.1.4	Hotspot Exposure Condition	40
6.2	3G SAR Test Reduction Procedure	40
6.3	GSM Test Configuration	41
6.4	UMTS Test Configuration	41
6.5	LTE Test Configuration	47
6.6	WiFi Test Configuration	50
6.6.1	Initial Test Position Procedure	50
6.6.2	Initial Test Configuration Procedure	50
6.6.3	Sub Test Configuration Procedure	50
6.6.4	WiFi 2.4G SAR Test Procedures	51
6.6.5	WiFi 5G SAR Test Procedures	52
7	SAR Measurement Results	54
7.1	Conducted power measurements.....	54
7.1.1	Conducted power measurements of GSM850(Second Antenna)	55
7.1.2	Conducted power measurements of GSM1900(Second Antenna)	57
7.1.3	Conducted power measurements of UMTS Band II(Second Antenna).....	60
7.1.4	Conducted power measurements of UMTS Band IV(Second Antenna)	63
7.1.5	Conducted power measurements of UMTS Band V(Second Antenna)	66
7.1.6	Conducted power measurements of LTE Band II(Second Antenna)	69
7.1.7	Conducted power measurements of LTE Band IV(Second Antenna).....	78

7.1.8	Conducted power measurements of LTE Band V(Second Antenna)	87
7.1.9	Conducted power measurements of LTE Band VII(Second Antenna)	93
7.1.10	Conducted power measurements of LTE Band XII(Second Antenna)	99
7.1.11	Conducted power measurements of LTE Band XVII(Second Antenna)	103
7.1.12	Conducted power measurements of LTE Band XXVI(Second Antenna)	105
7.1.13	Conducted power measurements of LTE Band XXXVIII(Second Antenna)	111
7.1.14	Conducted power measurements of LTE Band XLI(Second Antenna)	117
7.1.15	Conducted power measurements of GSM850(Main Antenna)	123
7.1.16	Conducted power measurements of GSM1900(Main Antenna)	124
7.1.17	Conducted power measurements of UMTS Band II(Main Antenna)	125
7.1.18	Conducted power measurements of UMTS Band IV(Main Antenna)	128
7.1.19	Conducted power measurements of UMTS Band V(Main Antenna)	131
7.1.20	Conducted power measurements of LTE Band II(Main Antenna)	132
7.1.21	Conducted power measurements of LTE Band IV(Main Antenna)	141
7.1.22	Conducted power measurements of LTE Band V(Main Antenna)	147
7.1.23	Conducted power measurements of LTE Band VII(Main Antenna)	149
7.1.24	Conducted power measurements of LTE Band XII(Main Antenna)	153
7.1.25	Conducted power measurements of LTE Band XVII(Main Antenna)	155
7.1.26	Conducted power measurements of LTE Band XXVI(Main Antenna)	156
7.1.27	Conducted power measurements of LTE Band XXXVIII(Main Antenna)	159
7.1.28	Conducted power measurements of LTE Band XLI(Main Antenna)	163
7.1.29	Conducted power measurements of Downlink LTE CA	167
7.1.30	Conducted power measurements of WiFi 2.4G	169
7.1.31	Conducted power measurements of WiFi 5G	170
7.1.32	Conducted power measurements of BT	176
7.2	SAR measurement Results	177
7.2.1	SAR measurement Result of GSM850(Second Antenna)	179
7.2.2	SAR measurement Result of GSM1900(Second Antenna)	181
7.2.3	SAR measurement Result of UMTS Band II(Second Antenna)	183
7.2.4	SAR measurement Result of UMTS Band IV(Second Antenna)	185
7.2.5	SAR measurement Result of UMTS Band V(Second Antenna)	187
7.2.6	SAR measurement Result of LTE Band II(Second Antenna)	189
7.2.7	SAR measurement Result of LTE Band IV(Second Antenna)	192
7.2.8	SAR measurement Result of LTE Band V(Second Antenna)	195
7.2.9	SAR measurement Result of LTE Band VII(Second Antenna)	198
7.2.10	SAR measurement Result of LTE Band XII(Second Antenna)	201
7.2.11	SAR measurement Result of LTE Band XVII(Second Antenna)	204
7.2.12	SAR measurement Result of LTE Band XXVI(Second Antenna)	207
7.2.13	SAR measurement Result of LTE Band XXXVIII(Second Antenna)	211
7.2.14	SAR measurement Result of LTE Band XLI(Second Antenna)	214
7.2.15	SAR measurement Result of GSM850(Main Antenna)	217
7.2.16	SAR measurement Result of GSM1900(Main Antenna)	219
7.2.17	SAR measurement Result of UMTS Band II(Main Antenna)	221
7.2.18	SAR measurement Result of UMTS Band IV(Main Antenna)	223
7.2.19	SAR measurement Result of UMTS Band V(Main Antenna)	225
7.2.20	SAR measurement Result of LTE Band II(Main Antenna)	227
7.2.21	SAR measurement Result of LTE Band IV(Main Antenna)	230
7.2.22	SAR measurement Result of LTE Band V(Main Antenna)	233
7.2.23	SAR measurement Result of LTE Band VII(Main Antenna)	236
7.2.24	SAR measurement Result of LTE Band XII(Main Antenna)	239
7.2.25	SAR measurement Result of LTE Band XVII(Main Antenna)	242
7.2.26	SAR measurement Result of LTE Band XXVI(Main Antenna)	245
7.2.27	SAR measurement Result of LTE Band XXXVIII(Main Antenna)	248
7.2.28	SAR measurement Result of LTE Band XLI(Main Antenna)	251
7.2.29	SAR measurement Result of WiFi 2.4G	254
7.2.30	SAR measurement Result of WiFi 5G	257
7.3	Multiple Transmitter Evaluation	262
7.3.1	Stand-alone SAR test exclusion	263
7.3.2	Simultaneous Transmission Possibilities	264
7.3.3	SAR Summation Scenario	265
7.3.4	Simultaneous Transmission Conclusion	266
	Appendix A. System Check Plots	267
	Appendix B. SAR Measurement Plots	267



Appendix C. Calibration Certificate267
Appendix D. Photo documentation.....267



※ ※ **Modified History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	2016-02-16	Li Wei

1 General Information

1.1 Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for EVA-L09 is as below Table 1.

Band	Max Reported SAR(W/kg)		
	1-g Head	1-g Body-worn (15mm) *	1-g Hotspot (10mm)
GSM850	1.45	0.30	0.66
GSM1900	1.24	0.37	1.07
UMTS Band II	1.30	0.69	1.03
UMTS Band IV	1.02	0.52	0.90
UMTS Band V	1.49	0.34	0.54
LTE Band II	1.43	0.96	0.50
LTE Band IV	1.22	0.64	1.10
LTE Band V	1.41	0.34	0.59
LTE Band VII	1.43	0.43	0.55
LTE Band XII	1.42	0.34	0.52
LTE Band XVII	1.31	0.29	0.39
LTE Band XXVI	1.43	0.42	0.72
LTE Band XXXVIII	1.38	0.25	0.65
LTE Band XLI	1.25	0.26	0.73
WiFi 2.4G	1.44	0.16	0.37
WiFi 5G	1.46	0.13	0.27
The highest simultaneous SAR value is 1.59 W/kg per KDB690783 D01			

Table 1: Summary of test result

Note:

1)* For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits according to the FCC rule §2.1093, the ANSI C95.1:1992/IEEE C95.1:1991, the NCRP Report Number 86 for uncontrolled environment, according to the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013.

1.2 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain/Body/Arms/Legs)	1.60 W/kg	8.00 W/kg
Spatial Average SAR** (Whole Body)	0.08 W/kg	0.40 W/kg
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg

Table 2: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**1.3 EUT Description**

Device Information:			
Product Name:	Smart Phone		
Model:	EVA-L09		
FCC ID :	QISEVA-L09		
SN.:	1#:MWS0115B07000547 2#:MWS0115C23000221 3#:MWS0115C23000486		
Device Type :	Portable device		
Device Phase:	Identical Prototype		
Exposure Category:	Uncontrolled environment / general population		
Hardware Version :	HL1LEVAM		
Software Version :	A168-L09C900B071		
Antenna Type :	Internal antenna		
Others Accessories	Headset		
Device Operating Configurations:			
Supporting Mode(s)	GSM850/1900, UMTS Band II/IV/V, LTE Band II/IV/V/VII/XII/XVII/XXVI/XXXVIII/XLI, WiFi 2.4G/5G, BT,NFC		
Test Modulation	GSM(GMSK/8PSK),UMTS(QPSK),LTE(QPSK/16QAM), WiFi(DSSS/OFDM),BT(GFSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM850	824-849	869-894
	GSM1900	1850-1910	1930-1990
	UMTS Band II	1850-1910	1930-1990
	UMTS Band IV	1710-1755	2110-2155
	UMTS Band V	824-849	869-894
	LTE Band II	1850-1910	1930-1990
	LTE Band IV	1710-1755	2110-2155
	LTE Band V	824-849	869-894
	LTE Band VII	2500-2570	2620-2690
	LTE Band XII	699-716	729-746
	LTE Band XVII	704-716	734-746
	LTE Band XXVI	814-849	859-894
	LTE Band XXXVIII	2570-2620	2570-2620
	LTE Band XLI	2555-2655	2555-2655
	BT	2400-2483.5	
	WiFi 2.4G	2400-2483.5	
WiFi 5G	5150-5350 5470-5850		
NFC	13.56		
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
EGPRS Multislot Class(12)	Max Number of Timeslots in Uplink:	4	
	Max Number of Timeslots in Downlink:	4	
	Max Total Timeslot:	5	
HSDPA UE Category	14		
HSUPA UE Category	6		
DC-HSDPA UE Category	24		
LTE Release	10 (Downlink LTE CA only)		

Power Class:	4, tested with power level 5(GSM850)
	1, tested with power level 0(GSM1900)
	3, tested with power control "all 1"(UMTS Band II)
	3, tested with power control "all 1"(UMTS Band IV)
	3, tested with power control "all 1"(UMTS Band V)
	3, tested with power control all Max.(LTE Band II)
	3, tested with power control all Max.(LTE Band IV)
	3, tested with power control all Max.(LTE Band V)
	3, tested with power control all Max.(LTE Band VII)
	3, tested with power control all Max.(LTE Band XII)
	3, tested with power control all Max.(LTE Band XVII)
	3, tested with power control all Max.(LTE Band XXVI)
	3, tested with power control all Max.(LTE Band XXXVIII)
	3, tested with power control all Max.(LTE Band XLI)
Test Channels (low-mid-high):	128-190-251(GSM850)
	512-661-810(GSM1900)
	9262-9400-9538(UMTS Band II)
	1312-1413-1513(UMTS Band IV)
	4132-4182-4233(UMTS Band V)
	18607-18900-19193(LTE Band II BW=1.4MHz)
	18615-18900-19185(LTE Band II BW=3MHz)
	18625-18900-19175(LTE Band II BW=5MHz)
	18650-18900-19150(LTE Band II BW=10MHz)
	18675-18900-19125(LTE Band II BW=15MHz)
	18700-18900-19100(LTE Band II BW=20MHz)
	19957-20175-20393(LTE Band IV BW=1.4MHz)
	19965-20175-20385(LTE Band IV BW=3MHz)
	19975-20175-20375(LTE Band IV BW=5MHz)
	20000-20175-20350(LTE Band IV BW=10MHz)
	20025-20175-20325(LTE Band IV BW=15MHz)
	20050-20175-20300(LTE Band IV BW=20MHz)
	20407-20525-20643(LTE Band V BW=1.4MHz)
	20415-20525-20635(LTE Band V BW=3MHz)
	20425-20525-20625(LTE Band V BW=5MHz)
	20450-20525-20600(LTE Band V BW=10MHz)
	20775-21100-21425(LTE Band VII BW=5MHz)
	20800-21100-21400(LTE Band VII BW=10MHz)
	20825-21100-21375(LTE Band VII BW=15MHz)
	20850-21100-21350(LTE Band VII BW=20MHz)
	23017-23095-23173(LTE Band XII BW=1.4MHz)
	23025-23095-23165(LTE Band XII BW=3MHz)
	23035-23095-23155(LTE Band XII BW=5MHz)
	23060-23095-23130(LTE Band XII BW=10MHz)
	23755-23790-23825(LTE Band XVII BW=5MHz)
	23780-23790-23800(LTE Band XVII BW=10MHz)
	26697-26865-27033(LTE Band XXVI BW=1.4MHz)
	26705-26865-27025(LTE Band XXVI BW=3MHz)
	26715-26865-27015(LTE Band XXVI BW=5MHz)
	26750-26865-26990(LTE Band XXVI BW=10MHz)
	26775-26865-26965(LTE Band XXVI BW=15MHz)
	37775-38000-38225(LTE Band XXXVIII BW=5MHz)
	37800-38000-38200(LTE Band XXXVIII BW=10MHz)
	37825-38000-38175(LTE Band XXXVIII BW=15MHz)
	37850-38000-38150(LTE Band XXXVIII BW=20MHz)

Test Channels (low-mid-high):	40265-40740-41215(LTE Band XLI BW=5MHz)
	40290-40740-41190(LTE Band XLI BW=10MHz)
	40315-40740-41165(LTE Band XLI BW=15MHz)
	40340-40740-41140(LTE Band XLI BW=20MHz)
	802.11b/g/n 20M:1-6-11
	802.11n 40M:3-6-9 (WiFi 2.4G)
	802.11a/n/ac 20M: 36-40-44-48-52-56-60-64-100-104-108-112-116-120-124-128-132-136-140-149-153-157-161-165 802.11 n/ac 40M: 38-46-54-62-102-110-118-126-134-151-159 802.11ac 80M: 42-58-106-122-138-155(WiFi 5G)

Table 3:Device information and operating configuration

1.3.1 General Description

EVA-L09 is subscriber equipment in the LTE/WCDMA /GSM system. The LTE frequency band is Band I,Band II,Band III,Band IV,Band V, Band VI ,Band VII,Band VIII, Band XII,BandXVII, Band XVIII ,Band XIX, Band XX, Band XXVI, Band XXVIII ,Band XXXVIII,BandXXXIX, Band XL and Band XLI. But only Band II,Band IV, Band V ,Band VII,BandXII,Band XVII, Band XXVI, Band XXXVIII and Band XLI test data included in this report. The HSUPA/HSDPA/UMTS frequency band is Band I, Band II, Band IV, Band V, Band VI, Band VIII and Band XIX, But only Band II, Band IV and Band V test data can be used in this report. The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only GSM850 and DCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, LTE/ WCDMA /GSM protocol processing, voice, video, MMS service, GPS, AGPS,NFC and WIFI etc. Externally it provides earphone port (to provide voice service) and USIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

Battery information:

Name	Manufacture	Serials number	Description
Rechargeable Li-ion	Sunwoda Electronic Co., LTD	NA	Battery Model: HB366481ECW Rated capacity: 2900mAh
	SCUD (FUJIAN) Electronics Co., Ltd	NA	Nominal Voltage: $\text{---} +3.82\text{V}$
	(sony) Huizhou Desay Battery Co., Ltd	NA	Charging Voltage: $\text{---} +4.4\text{V}$

1.3.2 TDD LTE specification

The device supports TDD LTE bands. According to KDB 941225 D05 SAR for LTE Devices, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

For this device, TDD LTE SAR should be tested with the highest transmission duty factor (63.33%) , which using Uplink-downlink configuration 0.The detailed TDD LTE test configuration description are provided in Section 6 of this report.

1.3.3 Power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation per the PAG exclusion clause in KDB388624D02 item II.C.1.k:

- 1) A fixed level power reduction is applied for some frequency bands when hotspot mode becomes active. When the hotspot is disabled, the power value will be recovered.
- 2) A fixed level power reduction is applied for some frequency bands when simultaneously transmitting with the other antennas in certain simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction.The PAG requirements can be excluded per KDB 388624D02.

The following tables summerize the key power reduction information.The detailed full power and reduced tune-up specifications and conducted power measurement results are provided in Section 7 of this report.

2G&3G&4G Second antenna + WiFi antenna simultaneous transmission		
Band	Power Reduction Amount(dB)	
	Second Antenna + WiFi station	Second Antenna + WiFi Hotspot
GSM850	3.0	/
GSM1900	5.0	1.5
UMTS Band II	5.0	5.0
UMTS Band IV	4.0	4.0
UMTS Band V	3.5	0.5
LTE Band II	6.0	3.0
LTE Band IV	4.5	4.5
LTE Band V	3.5	2.0
LTE Band VII	8.5	6.0
LTE Band XII	2.5	/
LTE Band XVII	2.0	/
LTE Band XXVI	4.0	/
LTE Band XXXVIII	6.0	6.0
LTE Band XLI	6.0	6.0
WIFI 2.4G 802.11b/g/n	2.5	/
WIFI 5G 802.11a/n/ac	2.5	/

2G&3G&4G Main antenna + WiFi antenna simultaneous transmission		
Band	Power Reduction Amount (dB)	
	Main Antenna + WiFi station	Main Antenna + WiFi Hotspot
UMTS Band II	2.5	3.0
UMTS Band IV	2.5	0.5
LTE Band II	1.0	4.5
LTE Band IV	/	1.0
LTE Band VII	/	3.0
LTE Band XXXVIII	2.0	/
LTE Band XLI	2.0	/
WIFI 2.4G 802.11b/g/n	2.5	/
WIFI 5G 802.11a/n/ac	2.5	/

1.3.4 Downlink LTE CA specification

The device supports downlink Release 10 LTE Carrier Aggregation (CA) only. It supports a maximum of 2 carriers in the downlink. Other Release 10 features are not supported, including Uplink Carrier Aggregation, Enhanced SC-FDMA and Uplink MIMO or other antenna diversity configurations etc. All uplink communications are identical to the Release 8 Specifications.

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V12.8.0. The conducted power measurement results of downlink LTE CA are provided in Section 7 of this report per 3GPP TS 36.521-1 V12.6.0. According to KDB 941225 D05A, the downlink LTE CA SAR test is not required and PAG requirements can be excluded.

intra-band contiguous CA (per 3GPP TS 36.101 V12.8.0 Table 5.6A.1-1)

E-UTRA CA configuration / Bandwidth combination set					
E-UTRA CA configuration	Uplink CA configurations (NOTE 3)	Component carriers in order of increasing carrier frequency		Maximum aggregated bandwidth [MHz]	Bandwidth combination set
		Channel bandwidths for carrier [MHz]	Channel bandwidths for carrier [MHz]		
CA_7C	CA_7C	15	15	40	0
		20	20		
		10	20	40	1
		15	15, 20		
		20	10, 15, 20		
		15	10, 15		
CA_38C	CA_38C	20	15, 20	40	2
		15	15		
		20	20	40	0

Table: Test frequencies for CA_7C

Range	CC-Combo / N _{RB_agg} [RB]	CC1 Note1					CC2 Note1				
		BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]	BW [RB]	N _{UL}	f _{UL} [MHz]	N _{DL}	f _{DL} [MHz]
Low	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	100+100	100	21000	2525	3000	2645	100	21198	2544.8	3198	2664.8
High	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680

Note 1: Carriers in increasing frequency order.

Table: Test frequencies for CA_38C

Range	CC-Combo / N _{RB_agg} [RB]	CC1 Note1			CC2 Note1		
		BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]	BW [RB]	N _{UL/DL}	f _{UL/DL} [MHz]
Low	75+75	75	37825	2577.5	75	37975	2592.5
	100+100	100	37850	2580	100	38048	2599.8
Mid	75+75	75	37925	2587.5	75	38075	2602.5
	100+100	100	37900	2585	100	38098	2604.8
High	75+75	75	38025	2597.5	75	38175	2612.5
	100+100	100	37952	2590.2	100	38150	2610

Note 1: Carriers in increasing frequency order.

inter-band CA (per 3GPP TS 36.101 V12.8.0 Table 5.6A.1-2)

E-UTRA CA configuration / Bandwidth combination set									
E-UTRA CA Configuration	E-UTRA Bands	1.4	3	5	10	15	20	Maximum aggregated bandwidth [MHz]	Bandwidth combination set
		MHz	MHz	MHz	MHz	MHz	MHz		
CA_1A-5A	1				Yes			20	0
	5				Yes				
	1			Yes	Yes	Yes	Yes	30	1
	5			Yes	Yes				
CA_2A-17A	2			Yes	Yes			20	0
	17			Yes	Yes				
CA_3A-5A	3				Yes	Yes	Yes	30	0
	5			Yes	Yes				
	3				Yes			20	1
	5			Yes	Yes				
	3			Yes	Yes	Yes	Yes	30	2
	5			Yes	Yes				
CA_3A-7A	3			Yes	Yes	Yes	Yes	40	0
	7				Yes	Yes	Yes		
CA_4A-17A*	4			Yes	Yes			20	0
	17			Yes	Yes				
CA_7A-8A*	7				Yes	Yes	Yes	30	0
	8		Yes	Yes	Yes				
CA_7A-20A	7				Yes	Yes	Yes	30	0
	20			Yes	Yes				
	7				Yes	Yes	Yes	40	1
	20			Yes	Yes	Yes	Yes		
CA_7A-28A	7			Yes	Yes	Yes	Yes	35	0
	28			Yes	Yes	Yes			

Note:

- 1) * In the CA configurations of CA_7A-8A and CA_4A-17A, B8 and B17 can not be used as PCC.
- 2) Except note 1, for the other inter-band CA combinations, all the listed bands above can be used as PCC or SCC.
- 3) The channel spacing and aggregated channel bandwidth for CA are identical to the associated specification in 3GPP TS 36.101 V12.8.0.
- 4) The reference test frequencies for CA refers to 3GPP TS 36.508 V12.5.0.

1.3.5 Dynamic antenna switching specification

The device has two 2G/3G/4G Tx antennas (Main Antenna and Second Antenna). It can transmit from either Main Antenna or Second Antenna, but they can not transmit simultaneously.

SAR test procedure for dynamic antenna switching is as below (Refer to Section 7 for details):

The Main Antenna and Second Antenna are set to the MAX transmit power level respectively and test the SAR respectively in all applicable RF exposure conditions. Some AT commands are supplied to fix the operation state and choose the antenna so that only one TX antenna is chosen and tested at a time. All independent antennas will be completely covered by the appropriate SAR measurements and all simultaneous transmission possibilities will be fully considered to ensure SAR compliance.

1.3.6 Dynamic antenna tuning specification

The device also supports the dynamic antenna tuning function to optimize transmission efficiency for 1710MHz~2700MHz frequency operations.

The dynamic antenna tuning function is only applicable for the 2G/3G/4G main Tx antenna(Main Antenna: UMTS Band IV; LTE Band IV/VII/XXXVIII/XLI), which is located in the bottom part of the device. The 2G/3G/4G main antenna has two fixed states for these tuning bands: the state 1 and state 2. The two states shares the same antenna, RF path, test channel, conductive power and tune-up. The software will choose better RSSI as the working state of the main TX antenna based on the RSSI comparison and switch algorithm. The PAG requirements for can be excluded per KDB 388624D02 and FCC guidance.

SAR test procedure for dynamic antenna tuning is as below (Refer to Section 7 for details):

- a) Firstly, some AT commands are used to fix the tuning state at state1 or state 2, so that only one antenna tuning state is chosen at a time for SAR test.
- b) Secondly, in order to reduce the number of SAR tests required to demonstrate compliance for the two tuning states, one single point zoom scan SAR measurement between state1 and state 2 for each antenna tuning band and applicable RF exposure condition is considered to identify the higher SAR tuning state that need the full set of normally required SAR measurements and allow SAR test reduction for the other lower SAR conditions.
- c) Thirdly, full normally required SAR measurements are performed for the chosen higher SAR tuning state. The SAR worst case will also be checked for the other state in each antenna tuning band and applicable RF exposure condition to ensure the SAR compliance.

1.4 Test specification(s)

ANSI C95.1:1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.(IEEE Std C95.1-1991)
IEEE Std 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 5 of March 2015)
KDB941225 D01	3G SAR Procedures v03r01
KDB941225 D05	SAR for LTE Devices v02r05
KDB941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB941225 D06	Hotspot SAR v02r01
KDB447498 D01	General RF Exposure Guidance v06
KDB648474 D04	Handsets SAR v01r03
KDB248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB865664 D01	SAR measurement 100 MHz to 6 GHz v01r04
KDB865664 D02	SAR Reporting v01r02
KDB690783 D01	SAR Listings on Grants v01r03

1.5 Testing laboratory

Test Site	The Reliability Laboratory of Huawei Technologies Co., Ltd.
Test Location	Section G1,Huawei Base Bantian, Longgang District, Shenzhen 518129, P.R. China
Telephone	+86 755 28780808
Fax	+86 755 89652518
State of accreditation	The Test laboratory (area of testing) is accredited according to ISO/IEC 17025. CNAS Registration number: L0310 A2LA TESTING CERT #2174.01

1.6 Applicant and Manufacturer

Company Name	HUAWEI TECHNOLOGIES CO., LTD
Address	Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

1.7 Application details


Start Date of test	2015-12-23
End Date of test	2016-01-31

1.8 Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2 SAR Measurement System

2.1 SAR Measurement Set-up

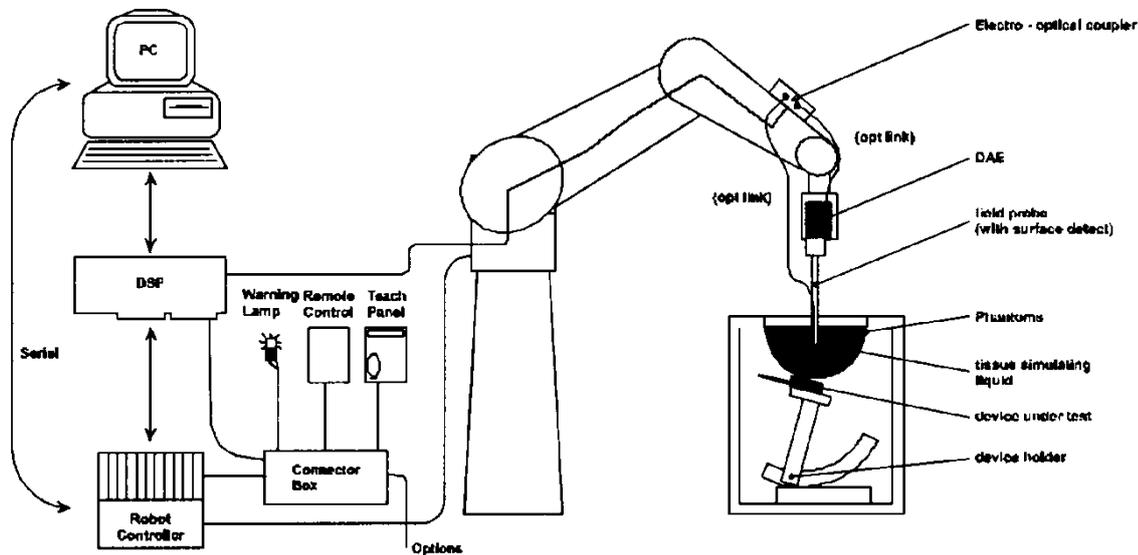

The DASY5 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
- The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 7.
- DASY5 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System check dipoles allowing to validate the proper functioning of the system.

2.2 Test environment

The DASY5 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.3 Data Acquisition Electronics description

The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.


DAE4

Input Impedance	200MOhm	
The Inputs	symmetrical and floating	
Common mode rejection	above 80 dB	

2.4 Probe description

These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (± 2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

Isotropic E-Field Probe ES3DV3 for Dosimetric Measurements

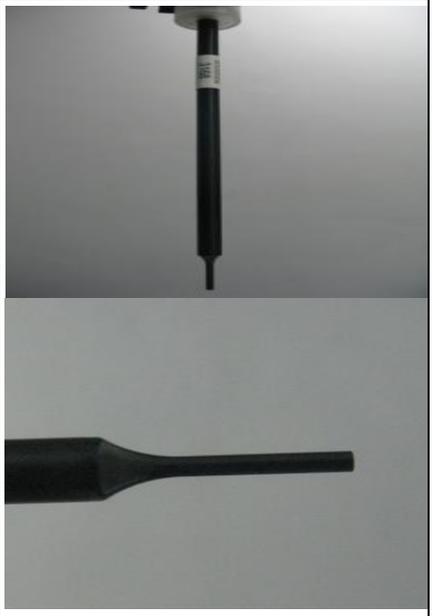Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones	

Isotropic E-Field Probe EX3DV4 for Dosimetric Measurements

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Calibration	ISO/IEC 17025 calibration service available.	
Frequency	10 MHz to >6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic range	10 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%	


2.5 Phantom description

SAM Twin Phantom

Shell Thickness	2mm±0.2mm;The ear region:6.0±0.2mm	
Filling Volume	Approximately 25 liters	
Dimensions	Length:1000mm; Width:500mm; Height: adjustable feet	
Measurement Areas	Left hand Right hand Flat phantom	

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

The following figure shows the definition of reference point:

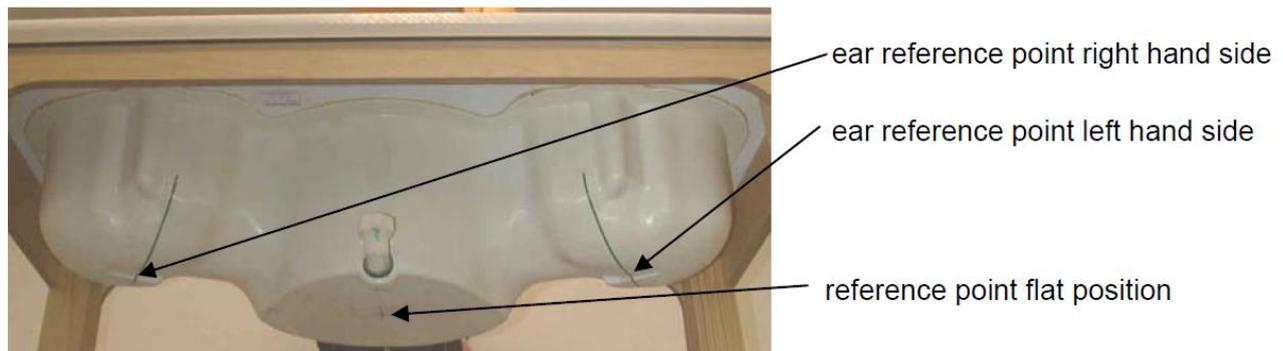

ELI4 Phantom

Shell Thickness	2mm±0.2mm	
Filling Volume	Approximately 30 liters	
Dimensions	Major axis:600mm; Minor axis:400mm;	
Measurement Areas	Flat phantom	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209-2 and all known tissue simulating liquids.

The phantom shell material is resistant to all ingredients used in the tissue-equivalent liquid recipes. The shell of the phantom including ear spacers is constructed from low permittivity and low loss material, with a relative permittivity $2 \leq \epsilon_r \leq 5$ at ≤ 3 GHz, $3 \leq \epsilon_r \leq 4$ at > 3 GHz and a loss tangent ≤ 0.05 .

2.6 Device holder description

The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\sigma = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The device holder permits the device to be positioned with a tolerance of $\pm 1^\circ$ in the tilt angle.

Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.7 Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Device	Type	Serial number	Date of last calibration*	Valid period
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	EX3DV4	3736	2015-04-30	One year
<input checked="" type="checkbox"/>	SPEAG	Dosimetric E-Field Probe	ES3DV3	3168	2015-09-28	One year
<input checked="" type="checkbox"/>	SPEAG	750MHz Dipole	D750V3	1044	2015-09-14	Three years
<input checked="" type="checkbox"/>	SPEAG	835MHz Dipole	D835V2	4d059	2013-05-02	Three years
<input checked="" type="checkbox"/>	SPEAG	1750MHz Dipole	D1750V2	1123	2014-07-08	Three years
<input checked="" type="checkbox"/>	SPEAG	1900MHz Dipole	D1900V2	5d091	2015-09-21	Three years
<input checked="" type="checkbox"/>	SPEAG	2300MHz Dipole	D2300V2	1016	2014-11-19	Three years
<input checked="" type="checkbox"/>	SPEAG	2450MHz Dipole	D2450V2	869	2015-06-19	Three years
<input checked="" type="checkbox"/>	SPEAG	2600MHz Dipole	D2600V2	1021	2015-07-24	Three years
<input checked="" type="checkbox"/>	SPEAG	5GHz Dipole	D5GHzV2	1155	2015-04-27	Three years
<input checked="" type="checkbox"/>	SPEAG	Data acquisition electronics	DAE4	851	2015-07-20	One year
<input checked="" type="checkbox"/>	SPEAG	Software	DASY 5	N/A	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM1	TP-1475	NCR	NCR
<input checked="" type="checkbox"/>	SPEAG	Twin Phantom	SAM2	TP-1474	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM3	TP-1597	NCR	NCR
<input type="checkbox"/>	SPEAG	Twin Phantom	SAM4	TP-1620	NCR	NCR
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMU 200	113989	2015-05-18	One year
<input checked="" type="checkbox"/>	R & S	Universal Radio Communication Tester	CMW 500	126855	2015-07-02	One year
<input checked="" type="checkbox"/>	Agilent	Network Analyser	E5071C	MY46213349	2015-02-13	One year
<input checked="" type="checkbox"/>	Agilent	Dielectric Probe Kit	85070E	2484	NCR	NCR
<input checked="" type="checkbox"/>	Agilent	Signal Generator	N5181A	MY47420989	2015-10-30	One year
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZHL-42W	QA1402001	NCR	NCR
<input checked="" type="checkbox"/>	MINI-CIRCUITS	Amplifier	ZVE-8G+	N523101139	NCR	NCR
<input checked="" type="checkbox"/>	AR	Directional Coupler	DC7144M1	0423264	2015-03-31	One year
<input checked="" type="checkbox"/>	Agilent	Dual Directional Coupler	772D	MY52180173	2015-01-08 2016-01-06	One year
<input checked="" type="checkbox"/>	R & S	Power Meter	NRP	100740	2015-07-02	One year
<input checked="" type="checkbox"/>	R & S	Power Meter Sensor	NRP-Z11	106288	2015-07-02	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter	E4417A	MY54100027	2015-03-31	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY54130001	2015-05-05	One year
<input checked="" type="checkbox"/>	Agilent	Power Meter Sensor	E9321A	MY54130007	2015-05-05	One year

Note:

1) Per KDB865664D01 requirements for dipole calibration, the test laboratory has adopted three-year extended calibration interval. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) The most recent return-loss result, measured at least annually, deviates by no more than 20% from the previous measurement.
- d) The most recent measurement of the real or imaginary parts of the impedance, measured at least annually is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

3) *All the equipments are within the valid period when the tests are performed.

3 SAR Measurement Procedure

3.1 Scanning procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The “area scan” measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension ($\leq 2\text{GHz}$), 12 mm in x- and y- dimension (2-4 GHz) and 10mm in x- and y- dimension (4-6GHz). If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in Appendix B.
- A “zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous “coarse” scan. This is a fine grid with maximum scan spatial resolution: Δx_{zoom} , $\Delta y_{\text{zoom}} \leq 2\text{GHz} - \leq 8\text{mm}$, 2-4GHz - $\leq 5\text{ mm}$ and 4-6 GHz- $\leq 4\text{mm}$; $\Delta z_{\text{zoom}} \leq 3\text{GHz} - \leq 5\text{ mm}$, 3-4 GHz- $\leq 4\text{mm}$ and 4-6GHz- $\leq 2\text{mm}$ where the robot additionally moves the probe along the z-axis away from the bottom of the Phantom. DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in Appendix B. Test results relevant for the specified standard (see chapter 1.4.) are shown in table form form in chapter 7.2.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2 mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in Appendix B.

The following table summarizes the area scan and zoom scan resolutions per FCC KDB 865664D01:

Frequency	Maximun Area Scan resolution ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximun Zoom Scan spatial resolution ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximun Zoom Scan spatial resolution			Minimum zoom scan volume (x,y,z)
			Uniform Grid	Graded Grad		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤2GHz	≤15mm	≤8mm	≤5mm	≤4mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30mm
2-3GHz	≤12mm	≤5mm	≤5mm	≤4mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥30mm
3-4GHz	≤12mm	≤5mm	≤4mm	≤3mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥28mm
4-5GHz	≤10mm	≤4mm	≤3mm	≤2.5mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥25mm
5-6GHz	≤10mm	≤4mm	≤2mm	≤2mm	≤1.5* $\Delta z_{\text{zoom}}(n-1)$	≥22mm

3.2 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 5 x 5 x 7 points(with 8mm horizontal resolution) or 7 x 7 x 7 points(with 5mm horizontal resolution) or 8 x 8 x 7 points(with 4mm horizontal resolution). The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY5 uses the advanced extrapolation option which is able to compensates boundary effects on E-field probes.

3.3 Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension "DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a ₁₀ , a ₁₁ , a ₁₂
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with	V _i	= compensated signal of channel i	(i = x, y, z)
	U _i	= input signal of channel i	(i = x, y, z)
	cf	= crest factor of exciting field (DASY parameter)	
	dcp _i	= diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$

with V_i = compensated signal of channel i (i = x, y, z)
 Norm_i = sensor sensitivity of channel i (i = x, y, z)
 [mV/(V/m)²] for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = (E_{\text{tot}}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{\text{pwe}} = E_{\text{tot}}^2 / 3770 \quad \text{or} \quad P_{\text{pwe}} = H_{\text{tot}}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

4 System Verification Procedure

4.1 Tissue Verification

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

The following materials are used for producing the tissue-equivalent materials.

Ingredients (% of weight)	Head Tissue						
	750	835	1750	1900	2300	2450	2600
Frequency Band (MHz)	750	835	1750	1900	2300	2450	2600
Water	39.2	41.45	52.64	55.242	62.82	62.7	55.242
Salt (NaCl)	2.7	1.45	0.36	0.306	0.51	0.5	0.306
Sugar	57.0	56.0	0.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	47.0	44.542	36.67	36.8	44.452
Ingredients (% of weight)	Body Tissue						
	750	835	1750	1900	2300	2450	2600
Frequency Band (MHz)	750	835	1750	1900	2300	2450	2600
Water	50.3	52.4	69.91	69.91	73.32	73.2	64.493
Salt (NaCl)	1.60	1.40	0.13	0.13	0.06	0.04	0.024
Sugar	47.0	45.0	0.0	0.0	0.0	0.0	0.0
HEC	0.0	1.0	0.0	0.0	0.0	0.0	0.0
Bactericide	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	29.96	29.96	26.62	26.7	32.252

Table 4: Tissue Dielectric Properties

Salt: 99+% Pure Sodium Chloride; Sugar: 98+% Pure Sucrose; Water: De-ionized, 16M Ω + resistivity
 HEC: Hydroxyethyl Cellulose; DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Simulating Head Liquid for 5G(HBBL3500-5800MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	50-65%
Mineral oil	10-30%
Emulsifiers	8-25%
Sodium salt	0-1.5%

Simulating Body Liquid for 5G(MBBL3500-5800MHz), Manufactured by SPEAG:

Ingredients	(% by weight)
Water	60-80%
Esters, Emulsifiers, Inhibitors	20-40%
Sodium salt	0-1.5%

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		ϵ_r (+/-5%)	σ (S/m) (+/-5%)	ϵ_r	σ (S/m)		
750H	705	42.14 (40.03~44.24)	0.89 (0.85~0.93)	42.52	0.862	21.6°C	2016-01-19
	710	42.11 (40.00~44.21)	0.89 (0.85~0.93)	42.44	0.867		
	750	41.90 (39.81~43.99)	0.89 (0.85~0.93)	41.90	0.908		
750B	705	55.70 (52.92~58.48)	0.96 (0.91~1.008)	55.42	0.915	21.5°C	2016-01-12
	710	55.70 (52.92~58.48)	0.96 (0.91~1.008)	55.37	0.919		
	750	55.50 (52.73~58.27)	0.96 (0.91~1.008)	55.05	0.959		
835H	825	41.60 (39.52~43.68)	0.90 (0.86~0.95)	40.20	0.879	21.7°C	2015-12-24
	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.02	0.888		
	850	41.50 (39.43~43.58)	0.92 (0.87~0.96)	39.88	0.903		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.46	0.985	21.4°C	2016-01-07
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.37	0.994		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	54.24	1.009		
835B	825	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.85	0.971	21.6°C	2016-01-26
	835	55.20 (52.44~57.96)	0.97 (0.92~1.02)	54.76	0.987		
	850	55.20 (52.44~57.96)	0.99 (0.94~1.04)	54.83	1.009		
1750H	1710	40.1 (38.10~42.11)	1.35 (1.28~1.42)	41.42	1.295	21.5°C	2015-12-26
	1730	40.1 (38.10~42.11)	1.36 (1.29~1.43)	41.35	1.315		
	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	41.28	1.336		
	1800	40 (38.00~42.00)	1.4 (1.33~1.47)	41.05	1.391		
1750H	1710	40.1 (38.10~42.11)	1.35 (1.28~1.42)	39.04	1.306	21.4°C	2016-01-03
	1730	40.1 (38.10~42.11)	1.36 (1.29~1.43)	38.95	1.323		
	1750	40.1 (38.10~42.11)	1.37 (1.30~1.44)	38.92	1.348		
	1800	40 (38.00~42.00)	1.4 (1.33~1.47)	38.61	1.399		

1750B	1710	53.5 (50.83~56.18)	1.46 (1.39~1.53)	51.68	1.461	21.6°C	2015-12-30
	1730	53.5 (50.83~56.18)	1.48 (1.41~1.55)	51.62	1.479		
	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	51.58	1.505		
	1800	53.3 (50.64~55.97)	1.52 (1.44~1.60)	51.42	1.557		
1750B	1710	53.5 (50.83~56.18)	1.46 (1.39~1.53)	52.12	1.473	21.6°C	2016-01-11
	1730	53.5 (50.83~56.18)	1.48 (1.41~1.55)	52.03	1.496		
	1750	53.4 (50.73~56.07)	1.49 (1.42~1.56)	51.88	1.510		
	1800	53.3 (50.64~55.97)	1.52 (1.44~1.60)	51.73	1.554		
1900H	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.92	1.372	21.5°C	2015-12-23
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.70	1.413		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.75	1.427		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.75	1.432		
1900H	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.39	1.394	21.4°C	2016-01-03
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.25	1.426		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.19	1.439		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	40.19	1.454		
1900H	1850	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.88	1.390	21.6°C	2016-01-17
	1880	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.75	1.424		
	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.67	1.437		
	1910	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.68	1.454		
1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.67	1.493	21.6°C	2015-12-30
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.58	1.532		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.50	1.552		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.46	1.561		

1900B	1850	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.86	1.478	21.6°C	2016-01-30
	1880	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.75	1.512		
	1900	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.68	1.533		
	1910	53.30 (50.64~55.97)	1.52 (1.44~1.60)	51.65	1.544		
2450H	2410	39.30 (37.34~41.26)	1.76 (1.67~1.85)	39.39	1.771	21.5°C	2016-01-23
	2435	39.20 (37.24~41.16)	1.79 (1.70~1.88)	39.82	1.798		
	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.78	1.816		
	2460	39.20 (37.24~41.16)	1.81 (1.72~1.90)	39.73	1.830		
2450B	2410	52.80 (50.16~55.44)	1.91 (1.81~2.00)	51.82	1.928	21.7°C	2016-01-12
	2435	52.70 (50.07~55.34)	1.94 (1.84~2.04)	51.75	1.954		
	2450	52.70 (50.07~55.34)	1.95 (1.85~2.05)	51.64	1.961		
	2460	52.70 (50.07~55.34)	1.96 (1.86~2.06)	51.67	1.978		
2600H	2510	39.12 (37.16~41.01)	1.86 (1.77~1.96)	39.36	1.884	21.6°C	2015-12-24
	2535	39.1 (37.13~41.04)	1.89 (1.80~1.98)	39.27	1.913		
	2560	39 (37.05~40.95)	1.917 (1.82~2.01)	39.17	1.941		
	2600	39 (37.05~40.95)	1.96 (1.86~2.05)	39.00	1.988		
2600H	2510	39.12 (37.16~41.01)	1.86 (1.77~1.96)	39.55	1.862	21.4°C	2016-01-05
	2535	39.1 (37.13~41.04)	1.89 (1.80~1.98)	39.44	1.886		
	2560	39 (37.05~40.95)	1.917 (1.82~2.01)	39.31	1.911		
	2600	39 (37.05~40.95)	1.96 (1.86~2.05)	39.10	1.952		
2600H	2510	39.12 (37.16~41.01)	1.86 (1.77~1.96)	38.38	1.847	21.6°C	2016-01-22
	2535	39.1 (37.13~41.04)	1.89 (1.80~1.98)	38.28	1.876		
	2560	39 (37.05~40.95)	1.917 (1.82~2.01)	38.23	1.904		
	2600	39 (37.05~40.95)	1.96 (1.86~2.05)	38.08	1.944		

2600B	2510	52.62 (49.99~55.25)	2.03 (1.93~2.13)	51.37	2.027	21.5°C	2015-12-27
	2535	52.59 (49.96~55.22)	2.07 (1.97~2.17)	51.26	2.058		
	2560	52.57 (49.94~55.20)	2.09 (1.99~2.19)	51.22	2.086		
	2600	52.5 (49.88~55.13)	2.16 (2.05~2.27)	51.07	2.129		
5G H	5200	36.0 (34.20~37.80)	4.66 (4.43~4.89)	35.53	4.773	21.3°C	2016-01-28
	5300	35.9 (34.10~37.70)	4.76 (4.52~5.00)	35.30	4.880		2016-01-28
	5600	35.5 (33.73~37.28)	5.07 (4.82~5.32)	34.92	5.227		2016-01-28
	5800	35.3 (33.54~37.07)	5.27 (5.01~5.53)	34.24	5.407		2016-01-28
5G B	5200	49.0 (46.55~51.45)	5.30 (5.03~5.56)	50.42	5.255	21.4°C	2016-01-30
	5600	48.50 (46.08~50.92)	5.77 (5.48~6.05)	47.94	5.887		2016-01-30
	5800	48.20 (45.79~50.61)	6.00 (5.70~6.30)	48.06	6.128		2016-01-30

Table 5: Measured Tissue Parameter

Note: 1) The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2°C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

2) KDB 865664 was ensured to be applied for probe calibration frequencies greater than or equal to 50MHz of the EUT frequencies.

3) The above measured tissue parameters were used in the DASY software to perform interpolation via the DASY software to determine actual dielectric parameters at the test frequencies. The SAR test plots may slightly differ from the table above since the DASY rounds to three significant digits.

4.2 System Check

The system check is performed for verifying the accuracy of the complete measurement system and performance of the software. The system check is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows system check results for all frequency bands and tissue liquids used during the tests(Graphic Plot(s) see Appendix A).

System Check	Target SAR (1W) (+/-10%)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (mW/g)	10-g (mW/g)	1-g (mW/g)	10-g (mW/g)		
750MHz Head	8.22 (7.40~9.04)	5.41 (4.87~5.95)	8.68	5.72	21.6°C	2016-01-19
835MHz Head	9.49 (8.54~10.44)	6.18 (5.56~6.80)	9.44	6.12	21.7°C	2015-12-24
1750MHz Head	35.1 (31.59~38.61)	18.6 (16.74~20.46)	34.64	18.48	21.5°C	2015-12-26
1750MHz Head	35.1 (31.59~38.61)	18.6 (16.74~20.46)	35.44	18.60	21.4°C	2016-01-03
1900MHz Head	40.20 (36.18~44.22)	21.10 (18.99~23.21)	40.40	21.04	21.5°C	2015-12-23
1900MHz Head	40.20 (36.18~44.22)	21.10 (18.99~23.21)	41.20	21.40	21.4°C	2016-01-03
1900MHz Head	40.20 (36.18~44.22)	21.10 (18.99~23.21)	42.00	21.56	21.6°C	2016-01-17
2450MHz Head	53.80 (48.42~59.18)	25.20 (22.68~27.72)	55.60	25.96	21.5°C	2016-01-23
2600MHz Head	57.8 (52.02~63.58)	26.3 (23.67~28.93)	59.60	26.72	21.6°C	2015-12-24
2600MHz Head	57.8 (52.02~63.58)	26.3 (23.67~28.93)	57.60	25.76	21.4°C	2016-01-05
2600MHz Head	57.8 (52.02~63.58)	26.3 (23.67~28.93)	57.60	25.48	21.6°C	2016-01-22
5200MHz Head	78.5 (70.65~86.35)	22.5 (20.25~24.75)	84.50	23.80	21.3°C	2016-01-28
5300MHz Head	83.5 (75.15~91.85)	23.9 (21.51~26.29)	89.60	24.90	21.3°C	2016-01-28
5600MHz Head	81.9 (73.71~90.09)	23.3 (20.97~25.63)	84.40	23.60	21.3°C	2016-01-28
5800MHz Head	78.8 (70.92~80.68)	22.4 (20.16~24.64)	85.40	23.90	21.3°C	2016-01-28
750MHz Body	8.69 (7.82~9.56)	5.76 (4.19~6.33)	8.32	5.52	21.5°C	2016-01-12
835MHz Body	9.42 (8.48~10.36)	6.19 (5.57~6.80)	9.80	6.44	21.4°C	2016-01-07
835MHz Body	9.42 (8.48~10.36)	6.19 (5.57~6.80)	9.72	6.36	21.6°C	2016-01-26
1750MHz Body	36.3 (32.67~39.93)	19.5 (17.55~21.45)	37.76	19.80	21.6°C	2015-12-30
1750MHz Body	36.3 (32.67~39.93)	19.5 (17.55~21.45)	37.92	19.88	21.6°C	2016-01-11
1900MHz Body	39.9 (35.91~43.89)	21.00 (18.90~23.10)	43.20	22.60	21.6°C	2015-12-30
1900MHz Body	39.9 (35.91~43.89)	21.00 (18.90~23.10)	41.60	21.84	21.6°C	2016-01-30




2450MHz Body	52.4 (47.16~57.64)	24.7 (22.23~27.17)	50.40	23.16	21.7°C	2016-01-12
2600MHz Body	57.5 (51.75~63.25)	25.9 (23.31~28.49)	57.60	25.84	21.5°C	2015-12-27
5200MHz Body	74.7 (67.23~82.17)	20.9 (18.81~22.99)	77.00	21.30	21.4°C	2016-01-30
5600MHz Body	77.8 (70.02~85.58)	21.6 (19.44~23.76)	86.20	23.60	21.4°C	2016-01-30
5800MHz Body	76.2 (68.58~83.82)	21.0 (18.9~23.10)	72.60	20.00	21.4°C	2016-01-30

Table 6: System Check Results

4.3 System check Procedure

The system check is performed by using a system check dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 250 mW(below 5GHz) or 100mW(above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system check to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system check to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

System check results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

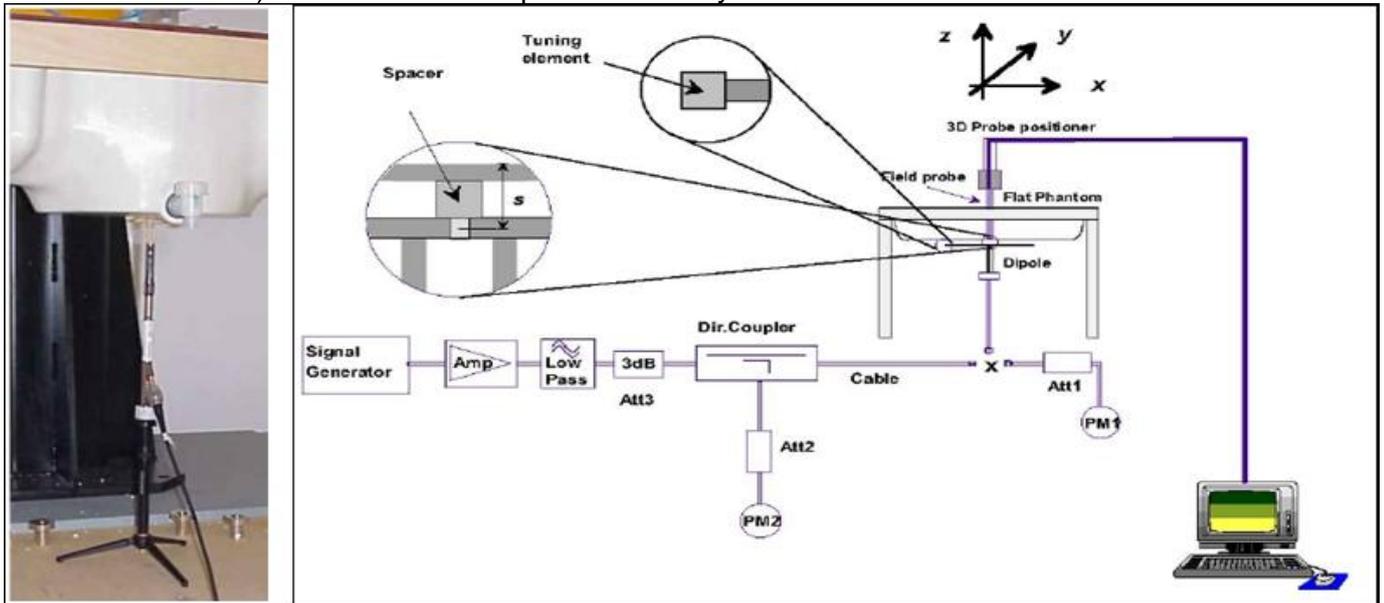

5 SAR measurement variability and uncertainty

5.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The detailed repeated measurement results are shown in Section 7.2.

5.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6 SAR Test Configuration

6.1 Test Positions Configuration

6.1.1 General considerations

Per IEEE 1528-2013, two imaginary lines on the handset were established: the vertical centerline and the horizontal line (See Figure 1).

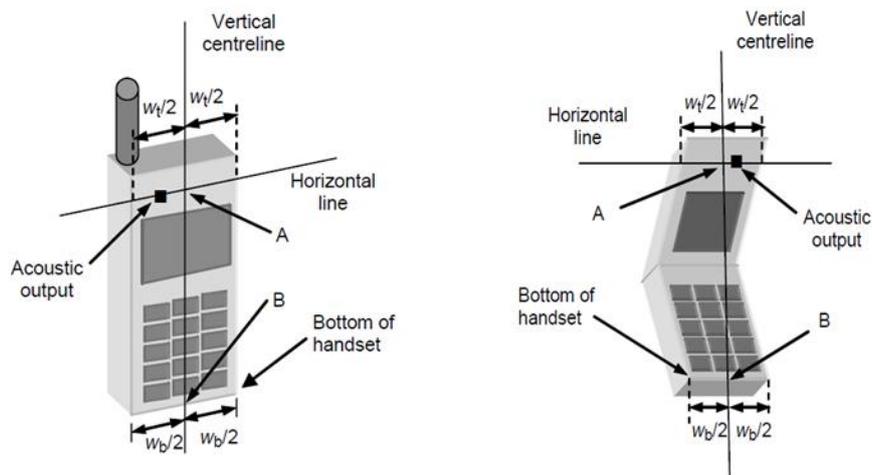


Figure 1 Hand Vertical Center & Horizontal Line Reference Points

6.1.2 Head Exposure Condition

Per IEEE 1528-2013, Head SAR measurements were made in the “cheek” position (See Figure 2) and the “tilt” position (See Figure 3). The device should be tested in both positions on left and right sides of the SAM phantom.

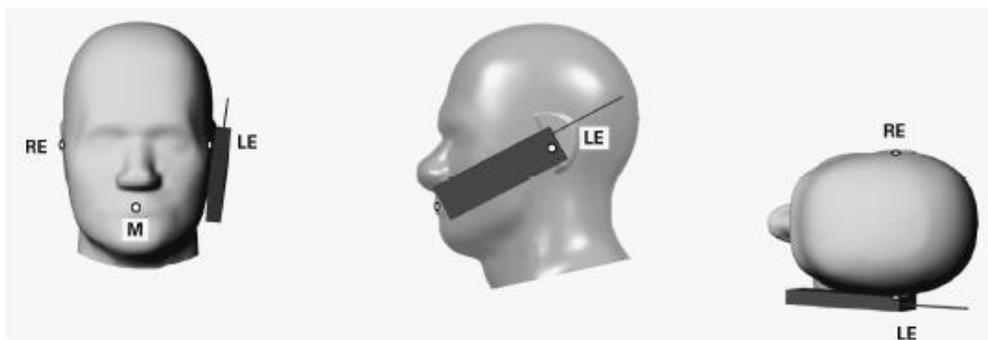


Figure 2 Front, Side and Top View of Cheek Position

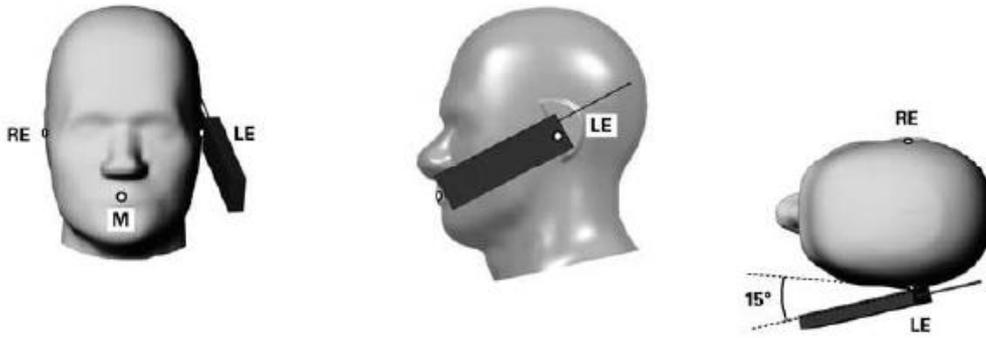


Figure 3 Front, Side and Top View of Tilt 15° Position

Note:

M Mouth reference point

LE Left ear reference point (ERP)

RE Right ear reference point(ERP)

6.1.3 Body-worn Exposure Condition

Body-worn operating configurations are tested with the holder attached to the device and positioned against a flat phantom with test separation distance of 15mm in a normal use configuration (See Figure 4). Per FCC KDB648474 D04, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

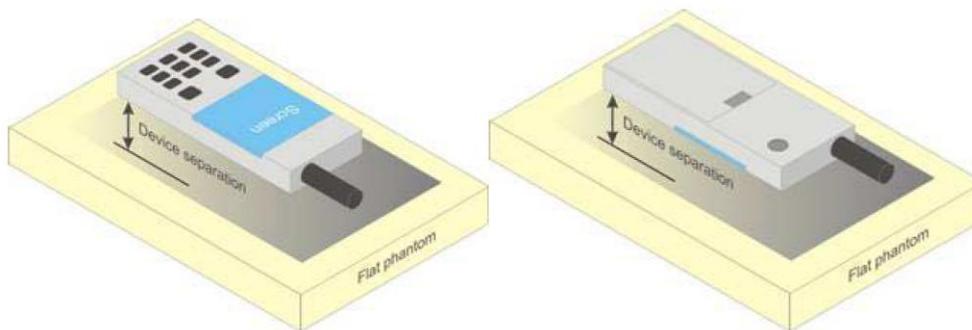


Figure 4 Test position for Body-Worn device

6.1.4 Hotspot Exposure Condition

Per FCC KDB 941225D06, The SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is $> 9 \text{ cm} \times 5 \text{ cm}$, a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode. The SAR results are used to determine simultaneous transmission SAR test exclusion for hotspot mode; otherwise, simultaneous transmission SAR measurement is required.

6.2 3G SAR Test Reduction Procedure

Per KDB941225 D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

6.3 GSM Test Configuration

SAR tests for GSM850 and GSM1900, a communication link is set up with a base station by air link. Using CMU200 the power level is set to “5” and “0” in SAR of GSM850 and GSM1900. The tests in the band of GSM850 and GSM1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

6.4 UMTS Test Configuration

1) Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) WCDMA

a. Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

b. Body SAR Measurements

SAR for body-worn accessory configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode

3) HSDPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as “otherwise” in the applicable procedures; SAR measurement is required for the secondary mode.

Per KDB941225 D01, the 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures for the highest reported SAR body exposure configuration in 12.2 kbps RMC.

HSDPA should be configured according to UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission condition, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4ms with a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. The β_c and β_d gain factors for DPCCH and DPDCH were set according to the values in the below table, β_{hs} for HS-DPCCH is set automatically to the correct value when ΔACK , $\Delta NACK$, $\Delta CQI = 8$. The variation of the β_c / β_d ratio causes a power reduction at sub-tests 2 - 4.

Sub-test [Ⓢ]	β_c [Ⓢ]	β_d [Ⓢ]	β_d (SF) [Ⓢ]	β_c / β_d [Ⓢ]	β_{hs} (1) [Ⓢ]	CM(dB)(2) [Ⓢ]	MPR (dB) [Ⓢ]
1 [Ⓢ]	2/15 [Ⓢ]	15/15 [Ⓢ]	64 [Ⓢ]	2/15 [Ⓢ]	4/15 [Ⓢ]	0.0 [Ⓢ]	0 [Ⓢ]
2 [Ⓢ]	12/15(3) [Ⓢ]	15/15(3) [Ⓢ]	64 [Ⓢ]	12/15(3) [Ⓢ]	24/15 [Ⓢ]	1.0 [Ⓢ]	0 [Ⓢ]
3 [Ⓢ]	15/15 [Ⓢ]	8/15 [Ⓢ]	64 [Ⓢ]	15/8 [Ⓢ]	30/15 [Ⓢ]	1.5 [Ⓢ]	0.5 [Ⓢ]
4 [Ⓢ]	15/15 [Ⓢ]	4/15 [Ⓢ]	64 [Ⓢ]	15/4 [Ⓢ]	30/15 [Ⓢ]	1.5 [Ⓢ]	0.5 [Ⓢ]

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 8$ $A_{hs} = \beta_{hs} / \beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ [Ⓢ]
 Note 2: CM=1 for $\beta_c / \beta_d = 12/15$, $\beta_{hs} / \beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.[Ⓢ]
 Note 3: For subtest 2 the β_c / β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ [Ⓢ]

Table 7: Sub-tests for UMTS Release 5 HSDPA

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI's
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 8: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 9:HSDPA UE category

4) HSUPA

SAR for body exposure configurations is measured according to the “Body SAR Measurements” procedures of 3G device. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

Per KDB941225 D01v03, the 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures for the highest reported body exposure SAR configuration in 12.2 kbps RMC.

Due to inner loop power control requirements in HSDPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSDPA should be configured according to the values indicated below as well as other applicable procedures described in the ‘WCDMA Handset’ and ‘Release 5 HSDPA Data Device’ sections of 3G device.

Sub-test [⊃]	β_c [⊃]	β_d [⊃]	β_d (SF) [⊃]	β_c/β_d [⊃]	$\beta_{hs}^{(1)}$ [⊃]	β_{ec} [⊃]	β_{ed} [⊃]	β_e [⊃] (SF) [⊃]	β_{ed} [⊃] (code) [⊃]	CM ⁽²⁾ [⊃] (dB) [⊃]	MP R [⊃] (dB) [⊃]	AG ⁽⁴⁾ [⊃] Inde x [⊃]	E-TFC I [⊃]
1 [⊃]	11/15 ⁽³⁾ [⊃]	15/15 ⁽³⁾ [⊃]	64 [⊃]	11/15 ⁽³⁾ [⊃]	22/15 [⊃]	209/225 [⊃]	1039/225 [⊃]	4 [⊃]	1 [⊃]	1.0 [⊃]	0.0 [⊃]	20 [⊃]	75 [⊃]
2 [⊃]	6/15 [⊃]	15/15 [⊃]	64 [⊃]	6/15 [⊃]	12/15 [⊃]	12/15 [⊃]	94/75 [⊃]	4 [⊃]	1 [⊃]	3.0 [⊃]	2.0 [⊃]	12 [⊃]	67 [⊃]
3 [⊃]	15/15 [⊃]	9/15 [⊃]	64 [⊃]	15/9 [⊃]	30/15 [⊃]	30/15 [⊃]	$\beta_{ed1}:47/15$ [⊃] $\beta_{ed2}:47/15$ [⊃]	4 [⊃]	2 [⊃]	2.0 [⊃]	1.0 [⊃]	15 [⊃]	92 [⊃]
4 [⊃]	2/15 [⊃]	15/15 [⊃]	64 [⊃]	2/15 [⊃]	4/15 [⊃]	2/15 [⊃]	56/75 [⊃]	4 [⊃]	1 [⊃]	3.0 [⊃]	2.0 [⊃]	17 [⊃]	71 [⊃]
5 [⊃]	15/15 ⁽⁴⁾ [⊃]	15/15 ⁽⁴⁾ [⊃]	64 [⊃]	15/15 ⁽⁴⁾ [⊃]	30/15 [⊃]	24/15 [⊃]	134/15 [⊃]	4 [⊃]	1 [⊃]	1.0 [⊃]	0.0 [⊃]	21 [⊃]	81 [⊃]

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference[⊃]
 Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ [⊃]
 Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ [⊃]
 Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g[⊃]
 Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.[⊃]

Table 10:Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	of E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM.(TS25.306-7.3.0).

Table 11:HSUPA UE category

5) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 12: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

- 1.The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
- 2.Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

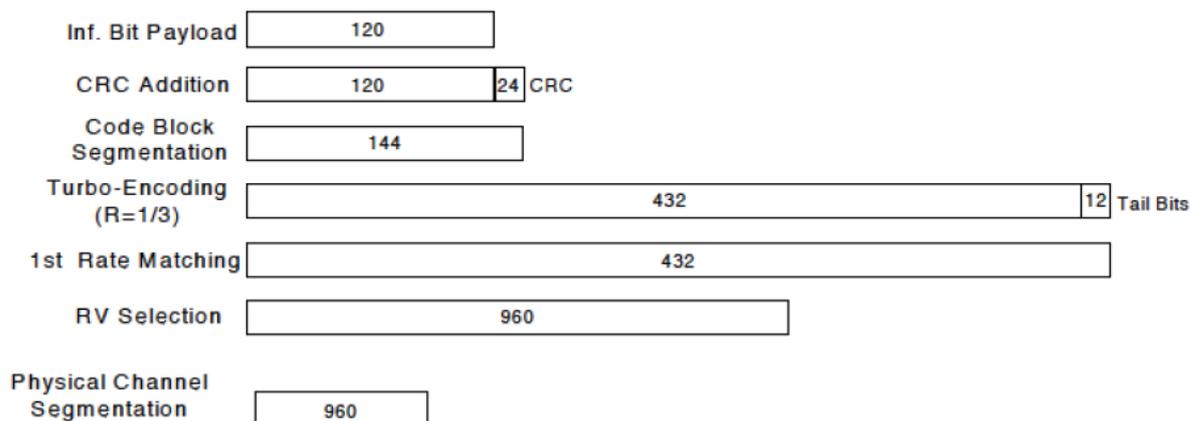


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test [Ⓛ]	β_c [Ⓛ]	β_d [Ⓛ]	β_d (SF) [Ⓛ]	β_c/β_d [Ⓛ]	$\beta_{hs}(1)$ [Ⓛ]	CM(dB)(2) [Ⓛ]	MPR (dB) [Ⓛ]
1 [Ⓛ]	2/15 [Ⓛ]	15/15 [Ⓛ]	64 [Ⓛ]	2/15 [Ⓛ]	4/15 [Ⓛ]	0.0 [Ⓛ]	0 [Ⓛ]
2 [Ⓛ]	12/15(3) [Ⓛ]	15/15(3) [Ⓛ]	64 [Ⓛ]	12/15(3) [Ⓛ]	24/15 [Ⓛ]	1.0 [Ⓛ]	0 [Ⓛ]
3 [Ⓛ]	15/15 [Ⓛ]	8/15 [Ⓛ]	64 [Ⓛ]	15/8 [Ⓛ]	30/15 [Ⓛ]	1.5 [Ⓛ]	0.5 [Ⓛ]
4 [Ⓛ]	15/15 [Ⓛ]	4/15 [Ⓛ]	64 [Ⓛ]	15/4 [Ⓛ]	30/15 [Ⓛ]	1.5 [Ⓛ]	0.5 [Ⓛ]

Note 1: Δ ACK, Δ NACK and Δ CQI = 8 $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ [Ⓛ]

Note 2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.[Ⓛ]

Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ [Ⓛ]

Up commands are set continuously to set the UE to Max power.

Note:

- 1.The Dual Carriers transmission only applies to HSDPA physical channels
- 2.The Dual Carriers belong to the same Node and are on adjacent carriers.
- 3.The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
- 4.The Dual Carriers operate in the same frequency band .
- 5.The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
- 6.The device doesn't support carrier aggregation for it just can operate in Release 8.

6.5 LTE Test Configuration

SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices. The CMW500 WideBand Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all TTI frames(Maximum TTI)

1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

3) A-MPR

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signalling Value of “NS_01” on the base station simulator.

4) LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test requirements

i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

ii) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in i) are applied to measure the SAR for QPSK with 50% RB allocation.

iii) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in i) and ii) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

iv) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

B) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

5) TDD LTE test configuration

According to KDB 941225 D05 SAR for LTE Devices v02r04, for Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

TDD LTE Band 38/41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Figure 4.2-1: Frame structure type 2

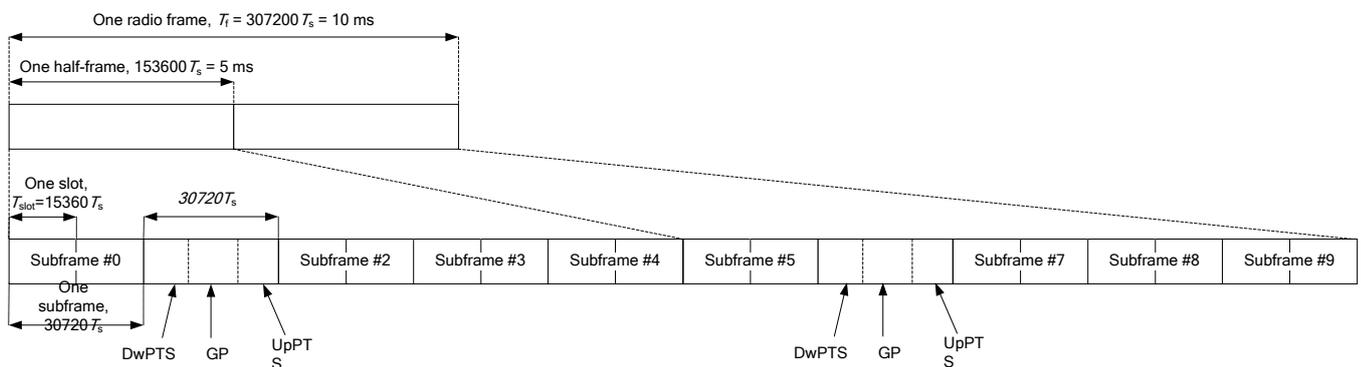


Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	DwPTS		UpPTS		DwPTS		UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$		
1	$19760 \cdot T_s$			$20480 \cdot T_s$				
2	$21952 \cdot T_s$			$23040 \cdot T_s$				
3	$24144 \cdot T_s$			$25600 \cdot T_s$				
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$		
5	$6592 \cdot T_s$			$20480 \cdot T_s$				
6	$19760 \cdot T_s$			$23040 \cdot T_s$				
7	$21952 \cdot T_s$			$12800 \cdot T_s$				
8	$24144 \cdot T_s$			-				
9	$13168 \cdot T_s$	-	-	-	-	-	-	

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number										
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	
1	5 ms	D	S	U	U	D	D	S	U	U	D	
2	5 ms	D	S	U	D	D	D	S	U	D	D	
3	10 ms	D	S	U	U	U	D	D	D	D	D	
4	10 ms	D	S	U	U	D	D	D	D	D	D	
5	10 ms	D	S	U	D	D	D	D	D	D	D	
6	5 ms	D	S	U	U	U	D	S	U	U	D	

According to Figure 4.2-1, one radio frame is configured by 10 subframes, which consist of Uplink-subframe, Downlink-subframe and Special subframe. For TDD-LTE, the Duty Cycle should be calculated on Uplink-subframes and Special subframes, due to Special subframe containing both Uplink transmissions. So for one radio frame, Duty Cycle can be calculated with formula as below. The count of Uplink subframes are according to Table 4.2-2:

$$\text{Duty cycle} = (30720T_s \cdot \text{Ups} + \text{Uplink Component} \cdot \text{Specials}) / (307200T_s)$$

About the uplink component of Special subframes, we can figure out by Table 4.2-1:

$$\text{Uplink Component} = \text{UpPTS}$$

In conclusion, for the TDD LTE Band, Duty Cycle can be calculated with formula as below. All these sets are ok when we test, or we can set as below.

$$\text{Duty cycle} = [(30720T_s \cdot \text{Ups}) + \text{UpPTS} \cdot \text{Specials}] / (307200T_s)$$

And we can get different Duty cycles under different configurations:

Uplink-downlink configuration	Subframe number			Configuration of special subframe							
				Normal cyclic prefix in downlink				Extended cyclic prefix in downlink			
	Normal cyclic prefix in uplink		Extended cyclic prefix in uplink		Normal cyclic prefix in uplink		Extended cyclic prefix in uplink				
	D	S	U	configuration 0~4	configuration 5~9	configuration 0~4	configuration 5~9	configuration 0~3	configuration 4~7	configuration 0~3	configuration 4~7
0	2	2	6	61.43%	62.85%	61.67%	63.33%	61.43%	62.85%	61.67%	63.33%
1	4	2	4	41.43%	42.85%	41.67%	43.33%	41.43%	42.85%	41.67%	43.33%
2	6	2	2	21.43%	22.85%	21.67%	23.33%	21.43%	22.85%	21.67%	23.33%
3	6	1	3	30.71%	31.43%	30.83%	31.67%	30.71%	31.43%	30.83%	31.67%
4	7	1	2	20.71%	21.43%	20.83%	21.67%	20.71%	21.43%	20.83%	21.67%
5	8	1	1	10.71%	11.43%	10.83%	11.67%	10.71%	11.43%	10.83%	11.67%
6	3	2	5	51.43%	52.85%	51.67%	53.33%	51.43%	52.85%	51.67%	53.33%

For TDD LTE, SAR should be tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7 for Frame structure type 2.

6.6 WiFi Test Configuration

For WiFi SAR testing, a communication link is set up with the testing software for WiFi mode test. During the test, at the each test frequency channel, the EUT is operated at the RF continuous emission mode. The RF signal utilized in SAR measurement has 100% duty cycle and its crest factor is 1. The test procedures in KDB 248227D01v02r02 are applied.

6.6.1 Initial Test Position Procedure

For exposure condition with multiple test position, such as handsets operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4\text{W/kg}$, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8\text{W/kg}$ or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is $> 0.8\text{W/kg}$, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.

6.6.2 Initial Test Configuration Procedure

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required (see section 5.3.2 of KDB 248227D01). SAR test reduction of subsequent highest output test channels is based on the *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is $> 0.8\text{W/kg}$, SAR measurement is required for the subsequent next highest measured output power channel(s) in the initial test configuration until the *reported* SAR is $\leq 1.2\text{W/kg}$ or all required channels are tested.

6.6.3 Sub Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

When the highest reported SAR for the initial test configuration, according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is $\leq 1.2\text{W/kg}$, SAR is not required for that subsequent test configuration.

6.6.4 WiFi 2.4G SAR Test Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions.

A) 802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the *reported* SAR of the highest measured maximum output power channel (section 3.1 of of KDB 248227D01v02) for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the *reported* SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any *reported* SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

B) 2.4GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3 of of KDB 248227D01v02r01). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

C) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

6.6.5 WiFi 5G SAR Test Procedures

A) U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

B) U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

C) OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
 - 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
 - 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
 - 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.
- After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
- 1) The channel closest to mid-band frequency is selected for SAR measurement.
 - 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

D) SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7 SAR Measurement Results

7.1 Conducted power measurements

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200&CMW500 was used. SAR drift measured at the same position in liquid before and after each SAR test as below 7.2 chapter.

Note: CMU200 measures GSM peak and average output power for active timeslots. For SAR the timebased average power is relevant. The difference in between depends on the duty cycle of the TDMA signal :

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.1	1:2.77	1:2.08
timebased avg. power compared to slotted avg. power	-9.19dB	-6.13dB	-4.42dB	-3.18dB

The signalling modes differ as follows:

mode	coding scheme	modulation
GPRS	CS1 to CS4	GMSK
EDGE	MCS1 to MCS4	GMSK
EDGE	MCS5 to MCS9	8PSK

Apart from modulation change (GMSK/8PSK) coding schemes differ in code rate without influence on the RF signal. Therefore one coding scheme per mode was selected for conducted power measurements.

7.1.1 Conducted power measurements of GSM850(Second Antenna)

Full Power:

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		33.0	32.40	32.56	32.55	-9.19	23.81	23.21	23.37	23.36
GPRS/ EDGE (GMSK)	1 Tx Slot	33.0	32.41	32.58	32.53	-9.19	23.81	23.22	23.39	23.34
	2 Tx Slots	31.0	29.70	29.94	29.98	-6.13	24.87	23.57	23.81	23.85
	3 Tx Slots	29.0	27.52	27.77	27.70	-4.42	24.58	23.10	23.35	23.28
	4 Tx Slots	27.0	25.51	25.53	25.77	-3.18	23.82	22.33	22.35	22.59
EDGE (8PSK)	1 Tx Slot	26.5	25.72	25.99	25.97	-9.19	17.31	16.53	16.80	16.78
	2 Tx Slots	24.5	23.50	23.75	23.77	-6.13	18.37	17.37	17.62	17.64
	3 Tx Slots	22.5	21.53	21.74	21.76	-4.42	18.08	17.11	17.32	17.34
	4 Tx Slots	20.5	19.42	19.64	19.69	-3.18	17.32	16.24	16.46	16.51

Table 13:Conducted power measurement results of GSM850(Second Antenna)

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

Second antenna + WiFi Station:

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		30.00	29.09	29.39	29.41	-9.19	20.81	19.9	20.2	20.22
GPRS/ EDGE (GMSK)	1 Tx Slot	30.00	29.18	29.46	29.47	-9.19	20.81	19.99	20.27	20.28
	2 Tx Slots	28.00	26.95	27.21	27.26	-6.13	21.87	20.82	21.08	21.13
	3 Tx Slots	26.00	24.52	25.05	25.11	-4.42	21.58	20.1	20.63	20.69
	4 Tx Slots	24.00	22.56	22.73	22.74	-3.18	20.82	19.38	19.55	19.56
EDGE (8PSK)	1 Tx Slot	23.50	22.48	22.71	22.75	-9.19	14.31	13.29	13.52	13.56
	2 Tx Slots	21.50	20.39	20.54	20.59	-6.13	15.37	14.26	14.41	14.46
	3 Tx Slots	19.50	18.45	18.58	18.59	-4.42	15.08	14.03	14.16	14.17
	4 Tx Slots	17.50	16.47	16.58	16.65	-3.18	14.32	13.29	13.4	13.47

Table 14: Conducted power measurement results of GSM850(Second Antenna)

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.2 Conducted power measurements of GSM1900(Second Antenna)

Full Power:

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		30.2	30.12	29.89	30.08	-9.19	21.01	20.93	20.7	20.89
GPRS/ EDGE (GMSK)	1 Tx Slot	30.2	30.10	29.88	30.07	-9.19	21.01	20.91	20.69	20.88
	2 Tx Slots	28.2	27.27	27.03	27.26	-6.13	22.07	21.14	20.90	21.13
	3 Tx Slots	26.2	25.19	24.83	24.95	-4.42	21.78	20.77	20.41	20.53
	4 Tx Slots	24.2	22.78	22.53	22.61	-3.18	21.02	19.60	19.35	19.43
EDGE (8PSK)	1 Tx Slot	26.2	25.63	25.4	25.42	-9.19	17.01	16.44	16.21	16.23
	2 Tx Slots	24.2	23.12	22.93	23.25	-6.13	18.07	16.99	16.80	17.12
	3 Tx Slots	22.2	21.05	20.8	20.86	-4.42	17.78	16.63	16.38	16.44
	4 Tx Slots	20.2	18.93	18.61	18.72	-3.18	17.02	15.75	15.43	15.54

Table 15: Conducted power measurement results of GSM1900(Second Antenna)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

Second antenna + WiFi Station:

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		25.2	24.57	24.19	24.16	-9.19	16.01	15.38	15.00	14.97
GPRS/ EDGE (GMSK)	1 Tx Slot	25.2	24.56	24.17	24.12	-9.19	16.01	15.37	14.98	14.93
	2 Tx Slots	23.2	22.14	21.75	21.71	-6.13	17.07	16.01	15.62	15.58
	3 Tx Slots	21.2	20.11	19.68	19.57	-4.42	16.78	15.69	15.26	15.15
	4 Tx Slots	19.2	17.99	17.58	17.51	-3.18	16.02	14.81	14.40	14.33
EDGE (8PSK)	1 Tx Slot	21.2	20.15	19.92	19.91	-9.19	12.01	10.96	10.73	10.72
	2 Tx Slots	19.2	18.05	17.94	17.85	-6.13	13.07	11.92	11.81	11.72
	3 Tx Slots	17.2	15.79	15.84	15.75	-4.42	12.78	11.37	11.42	11.33
	4 Tx Slots	15.2	13.71	13.61	13.55	-3.18	12.02	10.53	10.43	10.37

Table 16: Conducted power measurement results of GSM1900(Second Antenna)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03r01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

Second antenna + WiFi Hotspot:

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		28.7	28.25	27.92	27.90	-9.19	19.51	19.06	18.73	18.71
GPRS/ EDGE (GMSK)	1 Tx Slot	28.7	28.21	27.87	27.85	-9.19	19.51	19.02	18.68	18.66
	2 Tx Slots	26.7	25.79	25.49	25.48	-6.13	20.57	19.66	19.36	19.35
	3 Tx Slots	24.7	23.53	23.17	23.13	-4.42	20.28	19.11	18.75	18.71
	4 Tx Slots	22.7	21.48	21.02	21.01	-3.18	19.52	18.30	17.84	17.83
EDGE (8PSK)	1 Tx Slot	24.7	23.70	23.50	23.45	-9.19	15.51	14.51	14.31	14.26
	2 Tx Slots	22.7	21.33	21.09	21.15	-6.13	16.57	15.20	14.96	15.02
	3 Tx Slots	20.7	19.05	18.91	18.83	-4.42	16.28	14.63	14.49	14.41
	4 Tx Slots	18.7	16.72	16.75	16.72	-3.18	15.52	13.54	13.57	13.54

Table 17: Conducted power measurement results of GSM1900(Second Antenna)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03r01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.3 Conducted power measurements of UMTS Band II(Second Antenna)

Full Power:

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	24.0	23.82	23.78	23.81
	12.2kbps AMR	24.0	23.81	23.78	23.79
HSDPA	Subtest 1	24.0	22.39	22.38	22.39
	Subtest 2	23.0	22.35	22.36	22.37
	Subtest 3	22.5	22.03	21.99	22.05
	Subtest 4	22.5	21.99	21.97	22.02
HSUPA	Subtest 1	21.0	20.20	20.09	20.10
	Subtest 2	21.0	20.26	20.11	20.17
	Subtest 3	21.0	20.17	20.30	20.13
	Subtest 4	21.0	19.73	19.83	19.68
	Subtest 5	21.0	20.20	20.56	20.35
DC-HSDPA	Subtest 1	24.0	22.39	22.34	22.45
	Subtest 2	23.0	22.32	22.34	22.31
	Subtest 3	22.5	22.01	21.95	22.02
	Subtest 4	22.5	21.99	21.95	22.06

Table 18: Conducted power measurement results of UMTS Band II(Second Antenna)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Second antenna + WiFi Station:

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	19.0	18.78	18.73	18.75
	12.2kbps AMR	19.0	18.70	18.74	18.71
HSDPA	Subtest 1	19.0	17.43	17.27	17.20
	Subtest 2	18.0	17.32	17.40	17.35
	Subtest 3	17.5	17.41	17.33	17.38
	Subtest 4	17.5	17.37	17.35	17.32
HSUPA	Subtest 1	16.0	15.82	15.89	15.87
	Subtest 2	16.0	15.21	14.80	14.82
	Subtest 3	16.0	15.38	15.17	15.31
	Subtest 4	16.0	15.38	14.77	15.70
	Subtest 5	16.0	15.98	15.95	15.90
DC-HSDPA	Subtest 1	19.0	17.45	17.26	17.22
	Subtest 2	18.0	17.33	17.41	17.37
	Subtest 3	17.5	17.41	17.34	17.39
	Subtest 4	17.5	17.35	17.36	17.36

Table 19: Conducted power measurement results of UMTS Band II(Second Antenna)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Second antenna + WiFi Hotspot:

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	19.0	18.78	18.73	18.75
	12.2kbps AMR	19.0	18.70	18.74	18.71
HSDPA	Subtest 1	19.0	17.43	17.27	17.20
	Subtest 2	18.0	17.32	17.40	17.35
	Subtest 3	17.5	17.41	17.33	17.38
	Subtest 4	17.5	17.37	17.35	17.32
HSUPA	Subtest 1	16.0	15.82	15.89	15.87
	Subtest 2	16.0	15.21	14.80	14.82
	Subtest 3	16.0	15.38	15.17	15.31
	Subtest 4	16.0	15.38	14.77	15.70
	Subtest 5	16.0	15.98	15.95	15.90
DC-HSDPA	Subtest 1	19.0	17.45	17.26	17.22
	Subtest 2	18.0	17.33	17.41	17.37
	Subtest 3	17.5	17.41	17.34	17.39
	Subtest 4	17.5	17.35	17.36	17.36

Table 20: Conducted power measurement results of UMTS Band II(Second Antenna)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.4 Conducted power measurements of UMTS Band IV(Second Antenna)

Full Power:

UMTS Band IV		Tune-up	Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	24.00	23.70	23.59	23.61
	12.2kbps AMR	24.00	23.60	23.56	23.60
HSDPA	Subtest 1	23.50	22.33	22.11	22.06
	Subtest 2	23.00	22.31	22.30	22.32
	Subtest 3	22.50	21.83	21.82	21.77
	Subtest 4	22.50	21.82	21.81	21.74
HSUPA	Subtest 1	21.50	19.96	19.91	19.94
	Subtest 2	21.00	19.27	19.34	19.18
	Subtest 3	21.00	20.64	20.61	20.66
	Subtest 4	21.50	19.66	19.57	19.65
	Subtest 5	21.50	20.41	20.28	20.75
DC-HSDPA	Subtest 1	23.50	22.36	22.14	22.08
	Subtest 2	23.00	22.30	22.31	22.32
	Subtest 3	22.50	21.84	21.85	21.75
	Subtest 4	22.50	21.86	21.87	21.74

Table 21: Conducted power measurement results of UMTS Band IV(Second Antenna)

Note:

- 1) The conducted power of UMTS Band IV is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Second antenna + WiFi Station:

UMTS Band IV		Tune-up	Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	20.0	19.37	19.35	19.41
	12.2kbps AMR	20.0	19.31	19.34	19.40
HSDPA	Subtest 1	19.5	18.11	17.88	17.82
	Subtest 2	19.0	18.08	18.10	18.05
	Subtest 3	18.5	17.64	17.61	17.83
	Subtest 4	18.5	17.74	17.60	17.85
HSUPA	Subtest 1	17.5	15.69	16.29	15.92
	Subtest 2	17.0	15.21	15.24	15.38
	Subtest 3	17.0	15.91	15.88	15.76
	Subtest 4	17.5	15.61	15.67	15.65
	Subtest 5	17.5	15.83	15.96	15.79
DC-HSDPA	Subtest 1	19.5	17.84	17.82	17.82
	Subtest 2	19.0	18.19	18.25	18.14
	Subtest 3	18.5	17.61	17.71	17.81
	Subtest 4	18.5	17.64	17.62	17.75

Table 22: Conducted power measurement results of UMTS Band IV(Second Antenna)

Note:

- 1) The conducted power of UMTS Band IV is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Second antenna + WiFi Hotspot:

UMTS Band IV		Tune-up	Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	20.0	19.37	19.35	19.41
	12.2kbps AMR	20.0	19.31	19.34	19.40
HSDPA	Subtest 1	19.5	18.11	17.88	17.82
	Subtest 2	19.0	18.08	18.10	18.05
	Subtest 3	18.5	17.64	17.61	17.83
	Subtest 4	18.5	17.74	17.60	17.85
HSUPA	Subtest 1	17.5	15.69	16.29	15.92
	Subtest 2	17.0	15.21	15.24	15.38
	Subtest 3	17.0	15.91	15.88	15.76
	Subtest 4	17.5	15.61	15.67	15.65
	Subtest 5	17.5	15.83	15.93	15.79
DC-HSDPA	Subtest 1	19.5	17.84	17.82	17.82
	Subtest 2	19.0	18.19	18.25	18.14
	Subtest 3	18.5	17.61	17.71	17.81
	Subtest 4	18.5	17.64	17.62	17.75

Table 23: Conducted power measurement results of UMTS Band IV(Second Antenna)

Note:

- 1) The conducted power of UMTS Band IV is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.5 Conducted power measurements of UMTS Band V(Second Antenna)

Full Power:

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	24.2	23.74	23.87	23.91
	12.2kbps AMR	24.2	23.71	23.84	23.81
HSDPA	Subtest 1	23.7	22.59	22.63	22.54
	Subtest 2	23.2	22.45	22.61	22.52
	Subtest 3	22.7	21.79	21.95	21.94
	Subtest 4	22.7	22.20	22.16	22.14
HSUPA	Subtest 1	21.7	20.36	20.10	20.16
	Subtest 2	20.7	19.19	20.20	20.31
	Subtest 3	20.7	19.94	19.88	19.85
	Subtest 4	20.7	19.85	19.70	19.77
	Subtest 5	21.0	20.47	20.21	20.43
DC-HSDPA	Subtest 1	23.7	22.59	22.66	22.57
	Subtest 2	23.2	22.44	22.62	22.53
	Subtest 3	22.7	21.75	21.95	21.95
	Subtest 4	22.7	22.21	22.12	22.17

Table 24: Conducted power measurement results of UMTS Band V(Second Antenna)

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Second antenna + WiFi Station:

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	20.7	19.71	19.89	19.85
	12.2kbps AMR	20.7	19.66	19.80	19.88
HSDPA	Subtest 1	20.2	18.25	18.54	18.35
	Subtest 2	19.7	18.45	18.52	18.50
	Subtest 3	19.2	17.80	17.94	17.93
	Subtest 4	19.2	18.22	17.93	18.29
HSUPA	Subtest 1	18.2	16.45	16.22	16.32
	Subtest 2	17.2	15.42	15.91	15.37
	Subtest 3	17.2	16.17	15.58	15.91
	Subtest 4	17.2	16.54	15.91	16.45
	Subtest 5	17.5	16.56	16.23	16.67
DC-HSDPA	Subtest 1	20.2	18.29	18.56	18.34
	Subtest 2	19.7	18.44	18.52	18.55
	Subtest 3	19.2	17.82	17.95	17.92
	Subtest 4	19.2	18.22	17.91	18.25

Table 25: Conducted power measurement results of UMTS Band V(Second Antenna)

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Second antenna + WiFi Hotspot:

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	23.7	23.24	23.36	23.36
	12.2kbps AMR	23.7	23.21	23.33	23.37
HSDPA	Subtest 1	23.2	21.78	22.05	21.83
	Subtest 2	22.7	21.97	22.03	22.01
	Subtest 3	22.2	21.28	21.46	21.45
	Subtest 4	22.2	21.28	21.43	21.44
HSUPA	Subtest 1	21.2	19.69	19.41	19.56
	Subtest 2	20.2	18.75	19.57	19.71
	Subtest 3	20.2	19.93	19.77	19.55
	Subtest 4	20.2	19.30	19.21	19.52
	Subtest 5	20.5	20.05	19.81	20.04
DC-HSDPA	Subtest 1	23.2	21.79	22.07	21.93
	Subtest 2	22.7	21.97	22.01	22.01
	Subtest 3	22.2	21.26	21.48	21.45
	Subtest 4	22.2	21.28	21.45	21.47

Table 26: Conducted power measurement results of UMTS Band V(Second Antenna)

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.6 Conducted power measurements of LTE Band II(Second Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	23.7	23.08	23.03	23.47
		1	3	23.7	23.08	23.04	23.45
		1	5	23.7	22.90	22.88	23.44
		3	0	23.7	23.06	22.99	23.49
		3	2	23.7	23.02	23.01	23.41
		3	3	23.7	23.01	23.00	23.67
		6	0	23.0	22.09	22.09	22.77
	16QAM	1	0	23.0	22.15	22.37	22.75
		1	3	23.0	22.04	22.40	22.95
		1	5	23.0	22.00	22.16	22.98
		3	0	23.0	21.99	22.15	22.66
		3	2	23.0	21.98	22.11	22.73
		3	3	23.0	22.03	22.09	22.79
		6	0	22.0	21.09	21.34	21.88
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	23.7	23.01	22.93	23.15
		1	7	23.7	23.13	23.11	23.51
		1	14	23.7	22.82	22.84	23.61
		8	0	23.0	22.10	22.10	22.41
		8	4	23.0	22.13	22.12	22.59
		8	7	23.0	22.06	22.08	22.68
		15	0	23.0	22.11	22.11	22.56
	16QAM	1	0	23.0	22.04	22.18	22.37
		1	7	23.0	22.21	22.26	22.74
		1	14	23.0	22.03	21.96	22.81
		8	0	22.0	21.15	21.34	21.57
		8	4	22.0	21.27	21.44	21.69
		8	7	22.0	21.16	21.39	21.83
		15	0	22.0	21.19	21.33	21.70

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	23.7	22.92	22.87	22.83
		1	13	23.7	23.22	23.24	23.44
		1	24	23.7	22.90	22.87	23.48
		12	0	23.0	22.19	22.17	22.19
		12	6	23.0	22.28	22.27	22.47
		12	13	23.0	22.11	22.11	22.52
		25	0	23.0	22.16	22.15	22.51
	16QAM	1	0	23.0	22.21	22.16	22.27
		1	13	23.0	22.53	22.55	22.88
		1	24	23.0	22.22	22.21	22.85
		12	0	22.0	21.34	21.32	21.36
		12	6	22.0	21.43	21.49	21.65
		12	13	22.0	21.35	21.28	21.68
		25	0	22.0	21.34	21.29	21.67
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	23.7	22.89	22.84	22.80
		1	25	23.7	23.19	23.25	23.05
		1	49	23.7	22.91	22.91	23.19
		25	0	23.0	22.09	22.08	21.80
		25	13	23.0	22.21	22.21	22.10
		25	25	23.0	22.19	22.19	22.48
		50	0	23.0	22.30	22.30	22.46
	16QAM	1	0	23.0	22.34	22.36	21.94
		1	25	23.0	22.69	22.64	22.38
		1	49	23.0	22.42	22.46	22.73
		25	0	22.0	21.26	21.26	20.94
		25	13	22.0	21.43	21.37	21.20
		25	25	22.0	21.49	21.44	21.64
		50	0	22.0	21.53	21.51	21.52

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	23.7	22.26	22.21	23.29
		1	38	23.7	23.24	23.22	22.92
		1	74	23.7	22.92	22.96	23.17
		36	0	23.0	22.09	22.11	21.70
		36	18	23.0	22.35	22.37	21.85
		36	39	23.0	22.25	22.27	22.13
		75	0	23.0	22.04	22.06	22.08
	16QAM	1	0	23.0	21.58	21.48	22.47
		1	38	23.0	22.67	22.65	22.24
		1	74	23.0	22.00	22.21	22.43
		36	0	22.0	21.27	21.22	20.80
		36	18	22.0	21.68	21.62	21.00
		36	39	22.0	21.55	21.52	21.24
		75	0	22.0	21.20	21.16	21.48
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	23.7	22.58	22.32	23.37
		1	50	23.7	22.29	21.75	21.77
		1	99	23.7	21.97	22.84	22.92
		50	0	23.0	22.47	21.75	22.41
		50	25	23.0	22.10	22.37	21.99
		50	50	23.0	21.62	22.16	22.38
		100	0	23.0	22.32	21.86	22.28
	16QAM	1	0	23.0	22.00	21.61	22.76
		1	50	23.0	22.79	22.25	22.08
		1	99	23.0	21.24	22.25	22.37
		50	0	22.0	21.39	20.77	21.35
		50	25	22.0	20.99	21.60	21.06
		50	50	22.0	20.51	21.36	21.42
		100	0	22.0	21.36	20.97	21.41

Table 27: Conducted power measurement results of LTE Band II(Second Antenna)

Second antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	17.7	16.02	16.05	16.78
		1	3	17.7	15.96	16.01	16.87
		1	5	17.7	15.95	15.98	16.84
		3	0	17.7	16.06	16.08	16.87
		3	2	17.7	15.96	15.99	16.84
		3	3	17.7	15.95	15.97	16.90
	16QAM	6	0	17.0	15.96	15.97	15.92
		1	0	17.0	15.80	15.90	16.32
		1	3	17.0	15.81	16.16	16.46
		1	5	17.0	15.74	16.08	16.41
		3	0	17.0	15.78	15.94	16.42
		3	2	17.0	15.78	15.99	16.42
		3	3	17.0	15.64	15.99	16.46
6	0	16.0	14.33	14.81	15.11		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	17.7	16.44	16.74	16.88
		1	7	17.7	16.74	16.91	17.02
		1	14	17.7	16.42	16.63	17.12
		8	0	17.0	15.73	15.93	16.18
		8	4	17.0	15.77	15.94	16.31
		8	7	17.0	15.65	15.86	16.29
		15	0	17.0	15.67	15.90	16.26
	16QAM	1	0	17.0	15.58	15.64	15.91
		1	7	17.0	15.88	16.00	16.32
		1	14	17.0	15.50	15.50	16.13
		8	0	16.0	14.54	14.86	14.95
		8	4	16.0	14.53	14.87	15.05
		8	7	16.0	14.46	14.79	15.02
		15	0	16.0	14.43	14.68	15.02

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	17.7	16.58	16.77	16.67
		1	13	17.7	16.95	17.09	17.26
		1	24	17.7	16.57	16.67	17.08
		12	0	17.0	15.88	16.02	16.06
		12	6	17.0	15.92	16.07	16.29
		12	13	17.0	15.79	15.90	16.24
		25	0	17.0	15.77	15.96	16.31
	16QAM	1	0	17.0	15.61	15.83	15.97
		1	13	17.0	15.98	16.26	16.50
		1	24	17.0	15.57	15.91	16.40
		12	0	16.0	14.63	14.92	14.97
		12	6	16.0	14.66	14.96	15.16
		12	13	16.0	14.54	14.81	15.12
		25	0	16.0	14.52	14.79	15.15
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	17.7	16.45	16.35	16.48
		1	25	17.7	17.08	17.05	16.84
		1	49	17.7	16.54	16.75	17.00
		25	0	17.0	15.75	15.77	15.63
		25	13	17.0	15.92	16.00	15.96
		25	25	17.0	15.88	15.96	16.26
		50	0	17.0	15.78	16.04	16.26
	16QAM	1	0	17.0	15.73	15.51	15.82
		1	25	17.0	16.21	16.20	16.13
		1	49	17.0	15.82	15.96	16.25
		25	0	16.0	14.56	14.54	14.64
		25	13	16.0	14.88	14.82	14.85
		25	25	16.0	14.84	14.82	15.13
		50	0	16.0	14.75	14.84	15.15

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	17.7	16.23	16.04	16.59
		1	38	17.7	16.96	17.03	16.70
		1	74	17.7	16.24	16.49	16.66
		36	0	17.0	16.05	15.79	15.54
		36	18	17.0	16.09	16.11	15.65
		36	39	17.0	15.73	15.97	15.87
		75	0	17.0	15.90	15.77	16.06
	16QAM	1	0	17.0	15.46	15.29	15.97
		1	38	17.0	16.16	16.28	15.82
		1	74	17.0	15.40	15.88	15.83
		36	0	16.0	14.93	14.68	14.58
		36	18	16.0	15.12	15.00	14.68
		36	39	16.0	14.77	14.86	14.79
		75	0	16.0	14.90	14.65	15.07
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	17.7	16.10	15.93	16.75
		1	50	17.7	16.93	16.89	16.66
		1	99	17.7	15.77	16.37	16.45
		50	0	17.0	15.87	15.50	15.91
		50	25	17.0	15.65	16.00	15.73
		50	50	17.0	15.30	15.88	16.11
		100	0	17.0	15.90	15.50	16.14
	16QAM	1	0	17.0	15.51	15.33	16.27
		1	50	17.0	16.39	16.35	16.25
		1	99	17.0	15.14	15.83	15.88
		50	0	16.0	14.83	14.27	15.07
		50	25	16.0	14.64	14.87	14.69
		50	50	16.0	14.28	14.74	14.97
		100	0	16.0	14.86	14.35	15.05

Table 28: Conducted power measurement results of LTE Band II(Second Antenna)

Second antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	20.7	19.96	20.04	20.36
		1	3	20.7	19.92	20.16	20.46
		1	5	20.7	19.80	20.06	20.48
		3	0	20.7	19.91	20.15	20.42
		3	2	20.7	19.82	20.09	20.46
		3	3	20.7	19.80	20.10	20.48
		6	0	20.0	18.72	19.08	19.51
	16QAM	1	0	20.0	19.04	19.11	19.64
		1	3	20.0	19.00	19.16	19.64
		1	5	20.0	18.95	19.05	19.63
		3	0	20.0	18.81	19.15	19.57
		3	2	20.0	18.78	19.07	19.58
		3	3	20.0	18.86	19.06	19.61
		6	0	19.0	17.27	17.48	17.96
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	20.7	19.85	20.04	20.22
		1	7	20.7	20.00	20.18	20.52
		1	14	20.7	19.81	19.89	20.43
		8	0	20.0	18.84	19.12	19.31
		8	4	20.0	18.91	19.10	19.44
		8	7	20.0	18.80	19.04	19.46
		15	0	20.0	18.86	19.10	19.43
	16QAM	1	0	20.0	18.95	19.10	19.30
		1	7	20.0	19.16	19.29	19.67
		1	14	20.0	19.00	19.03	19.59
		8	0	19.0	17.17	17.57	17.74
		8	4	19.0	17.22	17.56	17.88
		8	7	19.0	17.16	17.51	17.88
		15	0	19.0	17.22	17.48	17.83

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	20.7	19.81	20.13	19.98
		1	13	20.7	20.18	20.34	20.47
		1	24	20.7	19.85	19.91	20.36
		12	0	20.0	18.98	19.21	19.21
		12	6	20.0	19.05	19.26	19.41
		12	13	20.0	18.95	19.08	19.39
		25	0	20.0	18.93	19.16	19.46
	16QAM	1	0	20.0	18.85	19.18	19.12
		1	13	20.0	19.16	19.45	19.71
		1	24	20.0	18.92	19.04	19.63
		12	0	19.0	17.40	17.54	17.67
		12	6	19.0	17.50	17.65	17.91
		12	13	19.0	17.40	17.49	17.89
		25	0	19.0	17.31	17.51	17.88
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	20.7	19.42	19.40	19.77
		1	25	20.7	19.77	19.75	20.04
		1	49	20.7	20.24	20.23	20.25
		25	0	20.0	18.40	18.43	18.79
		25	13	20.0	18.84	18.81	19.04
		25	25	20.0	19.06	19.04	19.41
		50	0	20.0	18.67	18.70	19.43
	16QAM	1	0	20.0	18.83	18.85	18.95
		1	25	20.0	19.58	19.49	19.22
		1	49	20.0	19.13	19.26	19.53
		25	0	19.0	17.33	17.40	17.26
		25	13	19.0	17.57	17.52	17.48
		25	25	19.0	17.49	17.53	17.83
		50	0	19.0	17.39	17.66	17.87

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	20.7	19.57	19.50	20.08
		1	38	20.7	20.39	20.33	19.93
		1	74	20.7	19.91	19.86	19.95
		36	0	20.0	19.10	19.12	18.78
		36	18	20.0	19.39	19.36	18.91
		36	39	20.0	19.24	19.21	19.09
		75	0	20.0	18.98	19.01	19.34
	16QAM	1	0	20.0	18.71	18.60	19.27
		1	38	20.0	19.59	19.56	19.23
		1	74	20.0	19.16	19.14	19.28
		36	0	19.0	17.46	17.50	17.16
		36	18	19.0	17.74	17.72	17.32
		36	39	19.0	17.55	17.52	17.50
		75	0	19.0	17.35	17.33	17.74
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	20.7	19.61	19.36	20.20
		1	50	20.7	20.42	20.20	20.01
		1	99	20.7	19.10	19.83	19.77
		50	0	20.0	19.11	18.62	19.42
		50	25	20.0	18.85	19.29	19.01
		50	50	20.0	18.51	19.15	19.33
		100	0	20.0	19.11	18.74	19.36
	16QAM	1	0	20.0	18.85	18.79	19.71
		1	50	20.0	19.58	19.66	19.43
		1	99	20.0	18.25	19.32	19.21
		50	0	19.0	17.44	17.04	17.76
		50	25	19.0	17.16	17.61	17.38
		50	50	19.0	17.04	17.43	17.76
		100	0	19.0	17.45	17.10	17.77

Table 29: Conducted power measurement results of LTE Band II(Second Antenna)

7.1.7 Conducted power measurements of LTE Band IV(Second Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	23.8	23.12	23.05	23.56
		1	3	23.8	23.01	22.98	23.58
		1	5	23.8	22.89	22.84	23.54
		3	0	23.8	23.02	23.00	23.60
		3	2	23.8	23.00	22.93	23.60
		3	3	23.8	22.97	22.95	23.57
		6	0	23.0	22.05	22.05	22.60
	16QAM	1	0	23.0	22.08	22.11	22.81
		1	3	23.0	22.07	22.19	22.82
		1	5	23.0	22.03	22.10	22.75
		3	0	23.0	21.98	22.07	22.67
		3	2	23.0	22.01	22.01	22.66
		3	3	23.0	22.00	22.00	22.64
		6	0	22.0	21.03	21.14	21.66
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	23.8	23.03	22.98	23.40
		1	7	23.8	23.08	23.05	23.66
		1	14	23.8	22.72	22.69	23.37
		8	0	23.0	22.07	22.01	22.63
		8	4	23.0	22.10	22.04	22.60
		8	7	23.0	22.01	21.95	22.55
		15	0	23.0	22.08	22.02	22.57
	16QAM	1	0	23.0	22.16	22.12	22.38
		1	7	23.0	22.24	22.19	22.51
		1	14	23.0	21.93	21.87	22.29
		8	0	22.0	21.19	21.16	21.65
		8	4	22.0	21.17	21.12	21.67
		8	7	22.0	21.06	21.06	21.58
		15	0	22.0	21.15	21.10	21.57

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	23.8	22.87	23.06	23.45
		1	13	23.8	23.27	23.17	23.70
		1	24	23.8	22.91	22.67	23.31
		12	0	23.0	22.11	22.10	22.64
		12	6	23.0	22.22	22.19	22.70
		12	13	23.0	22.10	21.98	22.52
		25	0	23.0	22.07	22.08	22.52
	16QAM	1	0	23.0	22.06	22.33	22.81
		1	13	23.0	22.39	22.51	22.97
		1	24	23.0	22.18	22.13	22.69
		12	0	22.0	21.27	21.27	21.76
		12	6	22.0	21.33	21.30	21.82
		12	13	22.0	21.22	21.10	21.64
		25	0	22.0	21.20	21.16	21.58
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	23.8	23.08	23.06	23.18
		1	25	23.8	23.37	23.13	23.22
		1	49	23.8	22.66	22.66	23.33
		25	0	23.0	22.14	22.14	22.42
		25	13	23.0	22.11	22.11	22.56
		25	25	23.0	21.98	22.02	22.46
		50	0	23.0	22.07	22.08	22.39
	16QAM	1	0	23.0	22.44	22.45	22.66
		1	25	23.0	22.55	22.54	22.99
		1	49	23.0	22.24	22.17	22.72
		25	0	22.0	21.25	21.21	21.37
		25	13	22.0	21.22	21.19	21.54
		25	25	22.0	21.05	21.07	21.45
		50	0	22.0	21.16	21.16	21.39

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	23.8	23.20	23.17	22.98
		1	38	23.8	23.20	23.17	23.50
		1	74	23.8	22.83	22.81	23.40
		36	0	23.0	22.24	22.23	22.36
		36	18	23.0	22.32	22.32	22.47
		36	39	23.0	22.18	22.18	22.45
		75	0	23.0	22.19	22.20	22.45
	16QAM	1	0	23.0	22.37	22.43	22.37
		1	38	23.0	22.49	22.48	22.93
		1	74	23.0	22.22	22.18	22.68
		36	0	22.0	21.35	21.31	21.47
		36	18	22.0	21.42	21.40	21.47
		36	39	22.0	21.27	21.29	21.47
		75	0	22.0	21.27	21.27	21.41
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	23.8	23.25	23.23	22.83
		1	50	23.8	23.12	23.09	23.40
		1	99	23.8	22.86	22.80	23.30
		50	0	23.0	22.35	22.35	22.16
		50	25	23.0	22.20	22.20	22.42
		50	50	23.0	22.11	22.12	22.30
		100	0	23.0	22.23	22.25	22.22
	16QAM	1	0	23.0	22.46	22.53	22.42
		1	50	23.0	22.44	22.40	22.98
		1	99	23.0	22.21	22.25	22.78
		50	0	22.0	21.40	21.40	21.21
		50	25	22.0	21.27	21.26	21.47
		50	50	22.0	21.16	21.21	21.33
		100	0	22.0	21.28	21.32	21.29

Table 30: Conducted power measurement results of LTE Band IV(Second Antenna)

Second antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	19.3	18.00	18.33	18.64
		1	3	19.3	17.97	18.29	18.69
		1	5	19.3	17.88	18.28	18.57
		3	0	19.3	17.89	18.41	18.63
		3	2	19.3	17.93	18.37	18.60
		3	3	19.3	17.90	18.35	18.59
		6	0	18.5	16.99	17.34	17.60
	16QAM	1	0	18.5	17.12	17.40	17.77
		1	3	18.5	17.06	17.37	17.83
		1	5	18.5	16.97	17.25	17.71
		3	0	18.5	17.05	17.40	17.67
		3	2	18.5	17.08	17.35	17.74
		3	3	18.5	17.06	17.34	17.64
		6	0	17.5	16.08	16.30	16.65
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	19.3	18.29	18.25	18.42
		1	7	19.3	18.47	18.44	18.64
		1	14	19.3	18.07	18.05	18.33
		8	0	18.5	17.37	17.35	17.56
		8	4	18.5	17.34	17.32	17.55
		8	7	18.5	17.24	17.22	17.48
		15	0	18.5	17.31	17.29	17.49
	16QAM	1	0	18.5	16.81	17.33	17.50
		1	7	18.5	17.33	17.50	17.75
		1	14	18.5	17.02	17.09	17.42
		8	0	17.5	16.08	16.31	16.59
		8	4	17.5	16.19	16.30	16.58
		8	7	17.5	16.12	16.19	16.51
		15	0	17.5	16.09	16.26	16.46



Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	19.3	17.96	18.27	18.48
		1	13	19.3	18.26	18.48	18.74
		1	24	19.3	17.91	17.96	18.31
		12	0	18.5	17.11	17.47	17.65
		12	6	18.5	17.21	17.42	17.70
		12	13	18.5	17.11	17.19	17.51
		25	0	18.5	17.11	17.29	17.51
	16QAM	1	0	18.5	17.23	17.54	17.64
		1	13	18.5	17.55	17.71	17.87
		1	24	18.5	17.23	17.26	17.49
		12	0	17.5	16.13	16.40	16.63
		12	6	17.5	16.19	16.44	16.68
		12	13	17.5	16.03	16.20	16.49
		25	0	17.5	16.07	16.29	16.47
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	19.3	17.85	18.34	18.27
		1	25	19.3	18.42	18.46	18.64
		1	49	19.3	18.19	17.97	18.27
		25	0	18.5	17.22	17.50	17.36
		25	13	18.5	17.25	17.39	17.51
		25	25	18.5	17.27	17.29	17.40
		50	0	18.5	17.32	17.35	17.35
	16QAM	1	0	18.5	16.99	17.38	17.47
		1	25	18.5	17.60	17.57	17.80
		1	49	18.5	17.36	17.15	17.46
		25	0	17.5	16.15	16.32	16.30
		25	13	17.5	16.19	16.34	16.46
		25	25	17.5	16.24	16.14	16.34
		50	0	17.5	16.26	16.28	16.32

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	19.3	17.92	18.38	18.16
		1	38	19.3	18.62	18.50	18.63
		1	74	19.3	18.29	18.04	18.37
		36	0	18.5	17.31	17.55	17.47
		36	18	18.5	17.36	17.55	17.51
		36	39	18.5	17.48	17.40	17.43
		75	0	18.5	17.44	17.42	17.50
	16QAM	1	0	18.5	17.26	17.45	17.46
		1	38	18.5	17.88	17.55	17.87
		1	74	18.5	17.59	17.18	17.54
		36	0	17.5	16.21	16.40	16.37
		36	18	17.5	16.33	16.46	16.40
		36	39	17.5	16.39	16.26	16.38
		75	0	17.5	16.35	16.36	16.37
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	19.3	17.94	18.34	18.18
		1	50	19.3	18.62	18.37	18.59
		1	99	19.3	18.11	17.94	18.35
		50	0	18.5	17.39	17.62	17.37
		50	25	18.5	17.56	17.40	17.52
		50	50	18.5	17.50	17.29	17.30
		100	0	18.5	17.44	17.42	17.33
	16QAM	1	0	18.5	17.26	17.76	17.43
		1	50	18.5	17.99	17.78	17.87
		1	99	18.5	17.46	17.42	17.56
		50	0	17.5	16.29	16.48	16.28
		50	25	17.5	16.49	16.34	16.37
		50	50	17.5	16.41	16.17	16.21
		100	0	17.5	16.39	16.39	16.20

Table 31: Conducted power measurement results of LTE Band IV(Second Antenna)

Second antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	19.3	17.85	18.13	18.42
		1	3	19.3	17.92	18.09	18.46
		1	5	19.3	17.83	17.98	18.41
		3	0	19.3	17.35	17.63	17.93
		3	2	19.3	17.38	17.58	17.92
		3	3	19.3	17.35	17.56	17.96
		6	0	18.5	17.01	17.19	17.62
	16QAM	1	0	18.5	17.19	17.26	17.68
		1	3	18.5	17.19	17.19	17.70
		1	5	18.5	17.01	17.10	17.66
		3	0	18.5	16.92	17.23	17.73
		3	2	18.5	17.03	17.17	17.67
		3	3	18.5	16.98	17.20	17.69
		6	0	17.5	15.85	16.11	16.51
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	19.3	17.73	18.01	18.35
		1	7	19.3	18.06	18.15	18.52
		1	14	19.3	17.81	17.80	18.27
		8	0	18.5	17.06	17.25	17.66
		8	4	18.5	17.16	17.21	17.63
		8	7	18.5	17.10	17.13	17.57
		15	0	18.5	17.11	17.20	17.58
	16QAM	1	0	18.5	16.91	17.36	17.59
		1	7	18.5	17.34	17.49	17.74
		1	14	18.5	17.07	17.17	17.40
		8	0	17.5	15.90	16.13	16.47
		8	4	17.5	16.13	16.09	16.44
		8	7	17.5	16.01	16.02	16.41
		15	0	17.5	15.93	16.06	16.40

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	19.3	18.11	18.08	18.47
		1	13	19.3	18.31	18.34	18.63
		1	24	19.3	17.88	17.89	18.21
		12	0	18.5	17.29	17.37	17.70
		12	6	18.5	17.35	17.39	17.74
		12	13	18.5	17.14	17.16	17.55
		25	0	18.5	17.24	17.27	17.56
	16QAM	1	0	18.5	17.05	17.42	17.63
		1	13	18.5	17.33	17.63	17.93
		1	24	18.5	17.05	17.12	17.56
		12	0	17.5	16.08	16.21	16.57
		12	6	17.5	16.18	16.24	16.62
		12	13	17.5	16.09	16.02	16.38
		25	0	17.5	16.01	16.08	16.35
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	19.3	18.14	18.15	18.23
		1	25	19.3	18.24	18.25	18.56
		1	49	19.3	17.89	17.88	18.20
		25	0	18.5	17.37	17.43	17.52
		25	13	18.5	17.31	17.32	17.61
		25	25	18.5	17.27	17.20	17.50
		50	0	18.5	17.33	17.24	17.46
	16QAM	1	0	18.5	17.08	17.51	17.69
		1	25	18.5	17.65	17.64	17.92
		1	49	18.5	17.48	17.31	17.58
		25	0	17.5	16.05	16.22	16.22
		25	13	17.5	16.11	16.13	16.38
		25	25	17.5	16.18	16.01	16.25
		50	0	17.5	16.16	16.13	16.23

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	19.3	18.18	18.16	18.19
		1	38	19.3	18.25	18.25	18.57
		1	74	19.3	17.97	18.05	18.27
		36	0	18.5	17.41	17.42	17.45
		36	18	18.5	17.47	17.50	17.47
		36	39	18.5	17.35	17.38	17.46
		75	0	18.5	17.38	17.38	17.51
	16QAM	1	0	18.5	17.23	17.67	17.58
		1	38	18.5	17.95	17.70	17.99
		1	74	18.5	17.57	17.56	17.71
		36	0	17.5	16.22	16.36	16.28
		36	18	17.5	16.31	16.38	16.31
		36	39	17.5	16.45	16.25	16.31
		75	0	17.5	16.33	16.23	16.30
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	19.3	17.87	18.28	17.93
		1	50	19.3	18.51	18.23	18.54
		1	99	19.3	17.99	18.08	18.27
		50	0	18.5	17.43	17.48	17.33
		50	25	18.5	17.46	17.45	17.44
		50	50	18.5	17.45	17.31	17.33
		100	0	18.5	17.47	17.35	17.26
	16QAM	1	0	18.5	17.94	17.52	17.53
		1	50	18.5	17.88	17.52	17.95
		1	99	18.5	17.77	17.34	17.78
		50	0	17.5	16.40	16.36	16.14
		50	25	17.5	16.50	16.16	16.34
		50	50	17.5	16.07	16.12	16.20
		100	0	17.5	16.22	16.21	16.15

Table 32: Conducted power measurement results of LTE Band IV(Second Antenna)

7.1.8 Conducted power measurements of LTE Band V(Second Antenna)

Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.0	22.73	23.05	23.30
		1	3	24.0	22.86	23.07	23.36
		1	5	24.0	22.80	22.90	23.09
		3	0	24.0	22.74	23.02	23.32
		3	2	24.0	22.83	23.01	23.23
		3	3	24.0	22.87	22.92	23.13
		6	0	23.0	21.79	21.91	22.32
	16QAM	1	0	23.0	21.92	22.28	22.47
		1	3	23.0	22.06	22.26	22.60
		1	5	23.0	22.02	22.13	22.41
		3	0	23.0	21.79	22.09	22.31
		3	2	23.0	21.85	21.96	22.27
		3	3	23.0	21.92	21.91	22.17
		6	0	22.0	20.73	20.87	21.16
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	24.0	22.50	22.98	23.25
		1	7	24.0	23.07	23.12	23.39
		1	14	24.0	22.89	22.70	22.93
		8	0	23.0	21.83	21.93	22.25
		8	4	23.0	22.03	21.93	22.30
		8	7	23.0	21.97	21.84	22.27
		15	0	23.0	21.92	21.89	22.37
	16QAM	1	0	23.0	21.64	22.00	22.21
		1	7	23.0	22.39	22.10	22.56
		1	14	23.0	22.12	21.65	22.18
		8	0	22.0	20.71	20.93	21.28
		8	4	22.0	20.94	20.94	21.35
		8	7	22.0	20.88	20.81	21.17
		15	0	22.0	20.79	20.82	21.29

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.0	22.56	23.02	23.27
		1	13	24.0	23.24	23.19	23.46
		1	24	24.0	23.00	22.70	22.85
		12	0	23.0	21.88	22.00	22.30
		12	6	23.0	22.10	22.01	22.38
		12	13	23.0	22.00	21.80	22.16
		25	0	23.0	21.94	21.88	22.19
	16QAM	1	0	23.0	21.70	22.15	22.35
		1	13	23.0	22.38	22.38	22.63
		1	24	23.0	22.14	21.91	22.14
		12	0	22.0	20.84	21.00	21.32
		12	6	22.0	21.07	21.02	21.39
		12	13	22.0	20.97	20.81	21.18
		25	0	22.0	20.84	20.84	21.16
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.0	22.31	22.89	22.54
		1	25	24.0	23.43	23.10	23.47
		1	49	24.0	23.40	23.09	23.42
		25	0	23.0	22.01	21.87	21.79
		25	13	23.0	22.29	21.90	22.08
		25	25	23.0	21.98	21.63	22.06
		50	0	23.0	21.98	21.73	22.04
	16QAM	1	0	23.0	21.52	22.00	21.73
		1	25	23.0	22.63	22.24	22.42
		1	49	23.0	22.56	21.98	21.89
		25	0	22.0	20.85	20.88	20.68
		25	13	22.0	21.20	20.86	21.05
		25	25	22.0	20.89	20.61	21.01
		50	0	22.0	20.89	20.69	20.93

Table 33: Conducted power measurement results of LTE Band V(Second Antenna)

Second antenna + WiFi Station

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	20.5	19.39	19.50	19.81
		1	3	20.5	19.53	19.63	19.88
		1	5	20.5	19.48	19.39	19.75
		3	0	20.5	19.38	19.51	19.92
		3	2	20.5	19.42	19.50	19.90
		3	3	20.5	19.49	19.43	19.82
	16QAM	6	0	19.5	18.40	18.44	18.91
		1	0	19.5	18.39	18.70	19.12
		1	3	19.5	18.70	18.75	18.97
		1	5	19.5	18.72	18.71	19.01
		3	0	19.5	18.59	18.60	18.97
		3	2	19.5	18.65	18.60	19.00
		3	3	19.5	18.49	18.54	18.85
6	0	18.5	17.23	17.42	17.84		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	20.5	19.08	19.45	19.85
		1	7	20.5	19.74	19.67	20.06
		1	14	20.5	19.40	19.19	19.54
		8	0	19.5	18.41	18.48	18.94
		8	4	19.5	18.63	18.48	18.93
		8	7	19.5	18.56	18.37	18.72
		15	0	19.5	18.52	18.42	18.89
	16QAM	1	0	19.5	18.25	18.45	18.84
		1	7	19.5	18.92	18.67	19.06
		1	14	19.5	18.60	18.15	18.41
		8	0	18.5	17.34	17.42	17.89
		8	4	18.5	17.51	17.44	17.87
		8	7	18.5	17.43	17.32	17.66
		15	0	18.5	17.36	17.32	17.89

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	20.5	19.20	19.50	19.80
		1	13	20.5	19.95	19.66	20.17
		1	24	20.5	19.58	19.19	19.43
		12	0	19.5	18.53	18.50	18.91
		12	6	19.5	18.71	18.51	19.05
		12	13	19.5	18.67	18.31	18.72
		25	0	19.5	18.53	18.39	18.85
	16QAM	1	0	19.5	18.29	18.57	18.95
		1	13	19.5	19.04	18.74	19.38
		1	24	19.5	18.67	18.30	18.64
		12	0	18.5	17.41	17.50	17.90
		12	6	18.5	17.63	17.50	18.03
		12	13	18.5	17.54	17.31	17.74
		25	0	18.5	17.39	17.33	17.78
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	20.5	18.90	19.45	19.02
		1	25	20.5	19.99	19.59	20.09
		1	49	20.5	20.10	20.07	20.29
		25	0	19.5	18.56	18.42	18.33
		25	13	19.5	18.84	18.38	18.66
		25	25	19.5	18.58	18.14	18.58
		50	0	19.5	18.52	18.24	18.47
	16QAM	1	0	19.5	18.05	18.66	18.30
		1	25	19.5	19.16	18.90	19.22
		1	49	19.5	19.01	19.04	19.11
		25	0	18.5	17.43	17.34	17.24
		25	13	18.5	17.77	17.32	17.57
		25	25	18.5	17.50	17.07	17.62
		50	0	18.5	17.46	17.19	17.52

Table 34: Conducted power measurement results of LTE Band V(Second Antenna)

Second antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	22.0	21.03	21.37	21.62
		1	3	22.0	21.17	21.40	21.62
		1	5	22.0	21.16	21.23	21.43
		3	0	22.0	21.04	21.35	21.62
		3	2	22.0	21.18	21.33	21.53
		3	3	22.0	21.16	21.27	21.43
		6	0	21.0	20.08	20.23	20.49
	16QAM	1	0	21.0	20.20	20.53	20.64
		1	3	21.0	20.39	20.55	20.89
		1	5	21.0	20.32	20.39	20.84
		3	0	21.0	20.25	20.48	20.73
		3	2	21.0	20.32	20.45	20.63
		3	3	21.0	20.26	20.46	20.62
		6	0	20.0	19.14	19.31	19.59
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	22.0	20.91	21.34	21.60
		1	7	22.0	21.50	21.50	21.71
		1	14	22.0	21.23	21.03	21.25
		8	0	21.0	20.14	20.26	20.64
		8	4	21.0	20.34	20.27	20.70
		8	7	21.0	20.28	20.16	20.50
		15	0	21.0	20.24	20.21	20.68
	16QAM	1	0	21.0	20.03	20.37	20.68
		1	7	21.0	20.61	20.44	20.90
		1	14	21.0	20.38	19.99	20.42
		8	0	20.0	19.14	19.31	19.60
		8	4	20.0	19.34	19.32	19.65
		8	7	20.0	19.22	19.13	19.43
		15	0	20.0	19.17	19.22	19.59

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	22.0	21.34	21.31	21.64
		1	13	22.0	21.50	21.47	21.97
		1	24	22.0	21.04	21.02	21.20
		12	0	21.0	20.33	20.30	20.73
		12	6	21.0	20.34	20.32	20.78
		12	13	21.0	20.14	20.12	20.53
		25	0	21.0	20.22	20.26	20.59
	16QAM	1	0	21.0	20.09	20.58	20.79
		1	13	21.0	20.74	20.71	20.95
		1	24	21.0	20.45	20.29	20.55
		12	0	20.0	19.23	19.29	19.66
		12	6	20.0	19.45	19.31	19.72
		12	13	20.0	19.35	19.10	19.49
		25	0	20.0	19.15	19.12	19.48
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	22.0	21.22	21.21	20.92
		1	25	22.0	21.50	21.44	21.84
		1	49	22.0	21.62	21.56	21.61
		25	0	21.0	20.29	20.24	20.13
		25	13	21.0	20.26	20.21	20.51
		25	25	21.0	20.01	19.98	20.44
		50	0	21.0	20.11	20.07	20.37
	16QAM	1	0	21.0	19.85	20.36	20.24
		1	25	21.0	20.91	20.64	20.96
		1	49	21.0	20.74	20.56	20.73
		25	0	20.0	19.16	19.19	19.04
		25	13	20.0	19.49	19.17	19.43
		25	25	20.0	19.19	18.94	19.38
		50	0	20.0	19.21	19.03	19.26

Table 35: Conducted power measurement results of LTE Band V(Second Antenna)

7.1.9 Conducted power measurements of LTE Band VII(Second Antenna)

Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	24.0	23.10	22.91	22.88
		1	13	24.0	23.22	23.03	22.88
		1	24	24.0	22.98	22.58	22.24
		12	0	23.0	22.33	22.23	22.42
		12	6	23.0	22.21	22.20	22.22
		12	13	23.0	22.28	21.96	21.77
		25	0	23.0	22.06	22.08	22.13
	16QAM	1	0	23.0	21.39	21.19	21.37
		1	13	23.0	22.19	21.28	21.22
		1	24	23.0	21.16	21.01	21.22
		12	0	22.0	21.44	20.69	20.82
		12	6	22.0	20.88	20.65	20.71
		12	13	22.0	20.62	20.38	20.43
		25	0	22.0	20.71	20.49	20.59
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	24.0	22.85	22.83	23.18
		1	25	24.0	23.03	22.95	23.05
		1	49	24.0	22.94	22.93	22.56
		25	0	23.0	22.22	22.15	22.11
		25	13	23.0	22.14	22.14	22.63
		25	25	23.0	21.94	21.95	22.10
		50	0	23.0	22.07	22.08	22.57
	16QAM	1	0	23.0	21.44	21.31	21.34
		1	25	23.0	21.58	21.39	21.57
		1	49	23.0	21.62	21.88	21.51
		25	0	22.0	20.61	20.63	20.69
		25	13	22.0	20.75	20.54	20.65
		25	25	22.0	20.55	20.34	20.59
		50	0	22.0	21.32	20.46	20.86

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	24.0	22.76	22.46	23.13
		1	38	24.0	23.19	22.97	23.18
		1	74	24.0	22.63	22.30	22.06
		36	0	23.0	22.61	22.22	22.04
		36	18	23.0	22.20	22.12	22.07
		36	39	23.0	21.94	21.92	22.33
		75	0	23.0	22.93	22.03	22.86
	16QAM	1	0	23.0	21.25	21.17	21.03
		1	38	23.0	21.69	21.36	21.46
		1	74	23.0	21.08	21.04	21.04
		36	0	22.0	21.03	20.59	20.58
		36	18	22.0	20.69	20.58	20.65
		36	39	22.0	20.38	20.38	20.60
		75	0	22.0	21.24	20.49	20.86
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	24.0	23.05	23.02	23.11
		1	50	24.0	22.99	22.97	23.23
		1	99	24.0	22.88	22.82	22.64
		50	0	23.0	22.50	22.43	22.00
		50	25	23.0	22.20	22.20	22.29
		50	50	23.0	22.02	22.03	22.66
		100	0	23.0	22.26	22.21	22.34
	16QAM	1	0	23.0	21.86	21.83	21.52
		1	50	23.0	21.57	21.56	21.73
		1	99	23.0	21.37	21.40	21.77
		50	0	22.0	20.83	20.84	20.45
		50	25	22.0	20.56	20.57	20.75
		50	50	22.0	20.37	20.40	20.65
		100	0	22.0	20.65	20.62	20.84

Table 36: Conducted power measurement results of LTE Band VII(Second Antenna)

Second antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	15.5	14.45	14.08	14.50
		1	13	15.5	14.42	14.44	14.70
		1	24	15.5	13.75	13.85	14.31
		12	0	14.5	13.51	13.43	13.76
		12	6	14.5	13.44	13.42	13.81
		12	13	14.5	13.13	13.21	13.66
		25	0	14.5	13.27	13.34	13.71
	16QAM	1	0	14.5	12.55	12.51	12.71
		1	13	14.5	12.54	12.63	13.04
		1	24	14.5	12.51	12.55	12.56
		12	0	13.5	11.87	11.68	12.04
		12	6	13.5	11.79	11.62	12.09
		12	13	13.5	11.53	11.57	12.04
		25	0	13.5	11.64	11.53	12.02
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	15.5	14.21	14.21	14.17
		1	25	15.5	14.19	14.47	14.73
		1	49	15.5	14.13	14.38	14.85
		25	0	14.5	13.15	13.31	13.56
		25	13	14.5	13.15	13.40	13.65
		25	25	14.5	13.02	13.18	13.68
		50	0	14.5	13.90	13.34	13.84
	16QAM	1	0	14.5	12.54	12.56	12.52
		1	25	14.5	12.59	12.60	12.85
		1	49	14.5	12.56	12.60	13.04
		25	0	13.5	11.59	11.57	11.87
		25	13	13.5	11.52	11.53	11.93
		25	25	13.5	11.51	11.53	11.99
		50	0	13.5	12.25	11.54	12.12

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	15.5	14.06	14.03	13.60
		1	38	15.5	14.25	14.42	14.62
		1	74	15.5	13.77	13.55	14.06
		36	0	14.5	13.57	13.29	13.17
		36	18	14.5	13.10	13.37	13.52
		36	39	14.5	12.88	13.10	13.55
		75	0	14.5	13.75	13.26	13.71
	16QAM	1	0	14.5	12.51	12.53	12.54
		1	38	14.5	12.58	12.65	12.73
		1	74	14.5	12.52	12.56	12.59
		36	0	13.5	11.83	11.64	11.59
		36	18	13.5	11.52	11.57	11.80
		36	39	13.5	11.54	11.52	11.84
		75	0	13.5	11.79	11.59	11.77
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	15.5	14.54	14.57	13.99
		1	50	15.5	14.08	14.41	14.43
		1	99	15.5	14.53	13.99	14.75
		50	0	14.5	13.35	13.58	12.99
		50	25	14.5	12.85	13.42	13.56
		50	50	14.5	13.20	13.16	13.60
		100	0	14.5	13.80	13.41	13.64
	16QAM	1	0	14.5	12.92	13.00	12.51
		1	50	14.5	12.57	12.78	12.61
		1	99	14.5	13.02	12.59	12.88
		50	0	13.5	11.59	11.88	11.62
		50	25	13.5	11.54	11.59	11.84
		50	50	13.5	11.60	11.56	11.90
		100	0	13.5	12.12	11.61	11.91

Table 37: Conducted power measurement results of LTE Band VII(Second Antenna)

Second antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	18.0	17.87	17.49	17.73
		1	13	18.0	17.91	17.71	17.93
		1	24	18.0	17.30	17.16	17.47
		12	0	17.0	16.78	16.49	16.71
		12	6	17.0	16.75	16.49	16.73
		12	13	17.0	16.39	16.23	16.58
		25	0	17.0	16.59	16.36	16.64
	16QAM	1	0	17.0	15.72	15.43	15.64
		1	13	17.0	15.69	15.69	15.84
		1	24	17.0	15.09	15.11	15.52
		12	0	16.0	15.06	14.83	15.15
		12	6	16.0	14.97	14.82	15.20
		12	13	16.0	14.69	14.62	15.06
		25	0	16.0	14.75	14.73	15.04
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	18.0	17.64	17.59	17.43
		1	25	18.0	17.71	17.83	17.92
		1	49	18.0	17.55	17.76	17.94
		25	0	17.0	16.38	16.44	16.52
		25	13	17.0	16.38	16.43	16.53
		25	25	17.0	16.17	16.23	16.63
		50	0	17.0	16.95	16.38	16.81
	16QAM	1	0	17.0	15.62	15.58	15.25
		1	25	17.0	15.57	15.78	15.78
		1	49	17.0	15.42	15.82	15.95
		25	0	16.0	14.63	14.72	14.82
		25	13	16.0	14.62	14.74	14.88
		25	25	16.0	14.43	14.54	14.98
		50	0	16.0	15.37	14.66	15.11

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	18.0	17.34	17.44	16.85
		1	38	18.0	17.56	17.77	17.77
		1	74	18.0	16.97	16.90	17.28
		36	0	17.0	16.74	16.39	16.26
		36	18	17.0	16.23	16.41	16.46
		36	39	17.0	15.97	16.20	16.57
		75	0	17.0	16.90	16.33	16.70
	16QAM	1	0	17.0	15.74	15.43	15.65
		1	38	17.0	15.67	15.67	15.88
		1	74	17.0	15.09	15.14	15.51
		36	0	16.0	15.01	14.87	15.19
		36	18	16.0	14.91	14.80	15.23
		36	39	16.0	14.71	14.64	15.01
		75	0	16.0	14.71	14.71	15.06
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	18.0	17.93	17.92	17.29
		1	50	18.0	17.35	17.74	17.62
		1	99	18.0	17.83	17.44	17.91
		50	0	17.0	16.51	16.68	16.12
		50	25	17.0	15.95	16.51	16.53
		50	50	17.0	16.16	16.30	16.52
		100	0	17.0	16.84	16.51	16.58
	16QAM	1	0	17.0	15.66	15.55	15.26
		1	50	17.0	15.59	15.78	15.77
		1	99	17.0	15.42	15.86	15.99
		50	0	16.0	14.66	14.77	14.85
		50	25	16.0	14.66	14.74	14.83
		50	50	16.0	14.44	14.50	14.93
		100	0	16.0	15.38	14.71	15.16

Table 38: Conducted power measurement results of LTE Band VII(Second Antenna)

7.1.10 Conducted power measurements of LTE Band XII(Second Antenna)

Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23107CH	23095CH	23173CH
1.4MHz	QPSK	1	0	24.0	22.41	22.94	22.56
		1	3	24.0	22.63	22.94	22.05
		1	5	24.0	22.67	22.84	22.05
		3	0	24.0	22.45	22.85	22.01
		3	2	24.0	22.61	22.80	22.11
		3	3	24.0	22.63	22.72	22.09
		6	0	23.0	21.71	21.95	21.27
	16QAM	1	0	23.0	21.87	22.21	21.59
		1	3	23.0	22.10	22.24	21.06
		1	5	23.0	22.05	22.21	21.06
		3	0	23.0	21.76	22.12	21.16
		3	2	23.0	21.78	22.04	21.15
		3	3	23.0	21.81	21.97	21.09
		6	0	22.0	20.83	21.12	20.26
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23025CH	23095CH	23165CH
3MHz	QPSK	1	0	24.0	22.62	22.60	23.15
		1	7	24.0	22.98	22.93	22.64
		1	14	24.0	22.68	22.64	22.12
		8	0	23.0	21.99	21.94	22.06
		8	4	23.0	22.00	21.96	21.57
		8	7	23.0	21.92	21.90	21.09
		15	0	23.0	21.92	21.95	21.55
	16QAM	1	0	23.0	21.56	21.82	22.52
		1	7	23.0	22.31	22.11	21.91
		1	14	23.0	22.07	21.79	21.06
		8	0	22.0	20.88	21.23	21.16
		8	4	22.0	21.20	21.18	20.69
		8	7	22.0	20.99	21.02	20.07
		15	0	22.0	20.92	21.05	20.63

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23035CH	23095CH	23155CH
5MHz	QPSK	1	0	24.0	22.65	22.63	23.04
		1	13	24.0	23.05	23.03	23.24
		1	24	24.0	22.19	22.15	22.09
		12	0	23.0	21.98	21.97	22.30
		12	6	23.0	22.10	22.11	22.25
		12	13	23.0	21.74	21.76	21.37
		25	0	23.0	21.84	21.85	21.92
	16QAM	1	0	23.0	21.55	21.95	22.27
		1	13	23.0	22.32	22.30	22.55
		1	24	23.0	21.11	21.03	21.06
		12	0	22.0	20.90	21.18	21.41
		12	6	22.0	21.07	21.30	21.32
		12	13	22.0	21.23	20.96	20.52
		25	0	22.0	20.94	20.93	20.98
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23060CH	23095CH	23130CH
10MHz	QPSK	1	0	24.0	22.50	22.48	22.54
		1	25	24.0	23.08	23.06	23.28
		1	49	24.0	23.35	23.30	22.03
		25	0	23.0	21.82	21.81	22.01
		25	13	23.0	21.89	21.87	22.19
		25	25	23.0	21.88	21.85	21.60
		50	0	23.0	21.88	21.75	21.86
	16QAM	1	0	23.0	21.32	21.92	21.82
		1	25	23.0	22.24	22.41	22.54
		1	49	23.0	22.39	22.51	21.14
		25	0	22.0	20.78	21.01	21.15
		25	13	22.0	21.01	20.97	21.23
		25	25	22.0	20.71	20.93	20.69
		50	0	22.0	20.87	20.91	21.25

Table 39: Conducted power measurement results of LTE Band XII(Second Antenna)

Second antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23107CH	23095CH	23173CH
1.4MHz	QPSK	1	0	21.5	20.42	20.41	19.55
		1	3	21.5	20.54	20.55	19.51
		1	5	21.5	20.53	20.49	19.52
		3	0	20.5	20.49	20.41	19.37
		3	2	20.5	20.42	20.44	19.04
		3	3	20.5	20.48	20.44	18.74
		6	0	20.5	20.30	20.27	19.09
	16QAM	1	0	20.5	20.47	20.39	19.88
		1	3	20.5	20.46	20.48	19.30
		1	5	20.5	20.46	20.47	18.76
		3	0	19.5	19.35	19.40	19.41
		3	2	19.5	19.41	19.43	19.07
		3	3	19.5	19.36	19.38	18.83
		6	0	19.5	19.32	19.24	18.19
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23025CH	23095CH	23165CH
3MHz	QPSK	1	0	21.5	20.31	20.22	20.64
		1	7	21.5	20.64	20.58	20.09
		1	14	21.5	20.29	20.24	19.64
		8	0	20.5	20.48	20.42	20.47
		8	4	20.5	20.42	20.45	19.84
		8	7	20.5	20.43	20.46	19.20
		15	0	20.5	20.43	20.46	19.80
	16QAM	1	0	20.5	20.39	20.33	20.47
		1	7	20.5	20.39	20.33	20.37
		1	14	20.5	20.39	20.35	19.41
		8	0	19.5	19.48	19.33	19.49
		8	4	19.5	19.45	19.47	18.92
		8	7	19.5	19.36	19.43	18.26
		15	0	19.5	19.30	19.35	18.85

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23035CH	23095CH	23155CH
5MHz	QPSK	1	0	21.5	20.30	20.27	20.37
		1	13	21.5	20.66	20.64	20.71
		1	24	21.5	19.55	19.57	19.75
		12	0	20.5	20.37	20.37	20.40
		12	6	20.5	20.41	20.42	20.46
		12	13	20.5	20.19	20.22	19.56
		25	0	20.5	20.28	20.29	20.27
	16QAM	1	0	20.5	20.44	20.37	20.47
		1	13	20.5	20.31	20.37	20.34
		1	24	20.5	19.23	19.20	18.75
		12	0	19.5	19.48	19.43	19.32
		12	6	19.5	19.35	19.30	19.33
		12	13	19.5	19.28	19.26	18.63
		25	0	19.5	19.45	19.42	19.33
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23060CH	23095CH	23130CH
10MHz	QPSK	1	0	21.5	19.97	19.92	19.97
		1	25	21.5	20.67	20.36	20.72
		1	49	21.5	20.76	20.37	19.56
		25	0	20.5	20.26	20.25	20.43
		25	13	20.5	20.32	20.31	20.45
		25	25	20.5	20.28	20.24	20.00
		50	0	20.5	20.28	20.13	20.26
	16QAM	1	0	20.5	20.16	20.10	20.38
		1	25	20.5	20.38	19.78	20.49
		1	49	20.5	20.37	20.44	19.43
		25	0	19.5	19.28	19.23	19.35
		25	13	19.5	19.49	19.33	19.34
		25	25	19.5	19.29	19.32	19.06
		50	0	19.5	19.15	19.19	19.27

Table 40: Conducted power measurement results of LTE Band XII(Second Antenna)

7.1.11 Conducted power measurements of LTE Band XVII(Second Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23755CH	23790CH	23825CH
5MHz	QPSK	1	0	24.0	22.80	23.21	23.39
		1	13	24.0	23.24	23.62	23.69
		1	24	24.0	23.07	23.25	22.15
		12	0	23.0	22.18	22.52	22.58
		12	6	23.0	22.48	22.87	22.68
		12	13	23.0	22.24	22.25	21.99
		25	0	23.0	22.16	22.71	22.29
	16QAM	1	0	23.0	22.31	22.57	22.76
		1	13	23.0	22.65	22.92	22.81
		1	24	23.0	22.24	22.45	21.25
		12	0	22.0	21.53	21.72	21.66
		12	6	22.0	21.53	21.96	21.77
		12	13	22.0	21.44	21.39	21.12
		25	0	22.0	21.50	21.74	21.33
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23780CH	23790CH	23800CH
10MHz	QPSK	1	0	24.0	22.77	22.81	22.98
		1	25	24.0	23.12	23.63	23.69
		1	49	24.0	23.71	23.68	22.88
		25	0	23.0	22.11	22.19	22.42
		25	13	23.0	22.57	22.76	22.78
		25	25	23.0	22.47	22.35	22.23
		50	0	23.0	22.52	22.41	22.53
	16QAM	1	0	23.0	22.09	22.18	22.27
		1	25	23.0	22.78	22.55	22.87
		1	49	23.0	22.97	22.81	22.32
		25	0	22.0	21.30	21.33	21.54
		25	13	22.0	21.71	21.77	21.82
		25	25	22.0	21.45	21.41	21.22
		50	0	22.0	21.56	21.80	21.89

Table 41: Conducted power measurement results of LTE Band XVII(Second Antenna)

Second antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23755CH	23790CH	23825CH
5MHz	QPSK	1	0	22.0	20.85	20.84	20.82
		1	13	22.0	21.19	21.23	21.15
		1	24	22.0	20.64	20.64	20.03
		12	0	21.0	20.03	20.05	19.92
		12	6	21.0	20.29	20.32	19.97
		12	13	21.0	19.62	19.65	19.13
		25	0	21.0	20.14	20.15	19.62
	16QAM	1	0	21.0	20.02	19.98	20.02
		1	13	21.0	20.38	20.31	20.33
		1	24	21.0	19.78	19.75	19.06
		12	0	20.0	19.02	18.99	19.01
		12	6	20.0	19.36	19.35	19.09
		12	13	20.0	18.69	18.68	18.21
		25	0	20.0	19.11	19.19	18.69
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23780CH	23790CH	23800CH
10MHz	QPSK	1	0	22.0	20.37	20.38	20.46
		1	25	22.0	20.98	20.95	20.93
		1	49	22.0	21.04	21.03	20.04
		25	0	21.0	19.72	19.68	19.91
		25	13	21.0	20.19	20.22	20.27
		25	25	21.0	19.67	19.70	19.53
		50	0	21.0	20.18	20.18	20.25
	16QAM	1	0	21.0	19.76	19.66	19.85
		1	25	21.0	20.30	20.29	20.25
		1	49	21.0	20.39	20.39	19.45
		25	0	20.0	18.64	18.67	18.94
		25	13	20.0	19.13	19.21	19.17
		25	25	20.0	18.69	18.71	18.56
		50	0	20.0	19.13	19.17	19.18

Table 42: Conducted power measurement results of LTE Band XVII(Second Antenna)

7.1.12 Conducted power measurements of LTE Band XXVI(Second Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26697CH	26865CH	27033CH
1.4MHz	QPSK	1	0	24.5	23.01	22.80	22.72
		1	3	24.5	23.12	22.85	22.79
		1	5	24.5	22.91	22.58	22.51
		3	0	24.5	22.97	22.66	22.67
		3	2	24.5	22.92	22.76	22.73
		3	3	24.5	22.86	22.63	22.60
		6	0	23.5	21.79	21.67	21.56
	16QAM	1	0	23.0	21.75	21.91	21.62
		1	3	23.0	21.89	21.96	21.63
		1	5	23.0	21.74	21.69	21.55
		3	0	23.0	21.74	21.75	21.73
		3	2	23.0	21.95	21.81	21.70
		3	3	23.0	21.85	21.73	21.56
		6	0	22.0	20.74	20.69	20.58
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26705CH	26865CH	27025CH
3MHz	QPSK	1	0	24.5	22.85	22.75	22.61
		1	7	24.5	23.01	22.84	22.74
		1	14	24.5	22.75	23.55	23.59
		8	0	23.5	21.67	21.74	21.64
		8	4	23.5	21.78	21.74	21.52
		8	7	23.5	21.55	21.52	21.55
		15	0	23.5	21.66	21.62	21.63
	16QAM	1	0	23.0	21.89	21.87	21.70
		1	7	23.0	21.82	21.85	21.75
		1	14	23.0	21.54	21.62	21.54
		8	0	22.0	20.62	20.60	20.52
		8	4	22.0	20.52	20.59	20.58
		8	7	22.0	20.69	20.64	20.71
		15	0	22.0	20.56	20.51	20.59

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26715CH	26865CH	27015CH
5MHz	QPSK	1	0	24.5	22.73	22.80	22.74
		1	13	24.5	22.79	22.86	22.95
		1	24	24.5	22.69	22.64	22.68
		12	0	23.5	21.68	21.79	21.80
		12	6	23.5	21.65	21.95	21.90
		12	13	23.5	21.68	21.56	21.59
		25	0	23.5	21.73	21.65	21.64
	16QAM	1	0	23.0	21.56	21.89	21.83
		1	13	23.0	21.65	21.87	22.15
		1	24	23.0	21.65	21.75	21.66
		12	0	22.0	20.73	20.62	20.72
		12	6	22.0	20.70	20.55	20.81
		12	13	22.0	20.64	20.69	20.56
		25	0	22.0	20.69	20.65	20.56
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26750CH	26865CH	26990CH
10MHz	QPSK	1	0	24.5	22.52	22.75	22.68
		1	25	24.5	22.71	22.82	22.96
		1	49	24.5	22.85	22.81	22.76
		25	0	23.5	21.65	21.60	21.53
		25	13	23.5	21.72	21.70	21.63
		25	25	23.5	21.73	21.63	21.80
		50	0	23.5	21.76	21.71	21.66
	16QAM	1	0	23.0	22.31	22.36	21.55
		1	25	23.0	22.75	22.78	21.99
		1	49	23.0	22.89	22.83	21.74
		25	0	22.0	20.65	20.55	20.56
		25	13	22.0	20.61	20.60	20.53
		25	25	22.0	20.79	20.69	20.71
		50	0	22.0	20.63	20.65	20.67

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26775CH	26865CH	26965CH
15MHz	QPSK	1	0	24.5	23.80	23.48	23.50
		1	38	24.5	23.86	24.33	23.81
		1	74	24.5	23.53	23.17	23.23
		36	0	23.5	22.63	22.83	22.72
		36	18	23.5	22.60	22.85	22.69
		36	39	23.5	22.88	22.79	22.77
		75	0	23.5	22.70	22.88	22.80
	16QAM	1	0	23.0	22.65	22.34	22.36
		1	38	23.0	22.97	22.93	22.88
		1	74	23.0	22.40	21.93	22.33
		36	0	22.0	21.79	21.89	21.62
		36	18	22.0	21.67	21.97	21.89
		36	39	22.0	21.72	21.55	21.71
		75	0	22.0	21.60	21.71	21.69

Table 43: Conducted power measurement results of LTE Band XXVI(Second Antenna)

**Second antenna + WiFi Station:**

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26697CH	26865CH	27033CH
1.4MHz	QPSK	1	0	20.5	19.03	18.95	18.76
		1	3	20.5	19.12	18.97	18.74
		1	5	20.5	19.14	18.87	18.51
		3	0	20.5	19.08	18.83	18.82
		3	2	20.5	19.11	18.84	18.63
		3	3	20.5	19.00	18.71	18.69
		6	0	19.5	17.85	17.88	17.68
	16QAM	1	0	19.0	17.88	18.04	18.05
		1	3	19.0	17.85	17.93	17.90
		1	5	19.0	17.82	17.88	17.85
		3	0	19.0	17.89	17.86	17.77
		3	2	19.0	17.74	17.85	17.68
		3	3	19.0	17.82	17.78	17.57
		6	0	18.0	16.96	16.94	16.88
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26705CH	26865CH	27025CH
3MHz	QPSK	1	0	20.5	18.95	19.13	18.65
		1	7	20.5	19.21	18.98	18.92
		1	14	20.5	19.02	18.84	18.67
		8	0	19.5	19.21	18.66	19.00
		8	4	19.5	18.99	18.92	18.50
		8	7	19.5	19.07	18.53	18.56
		15	0	19.5	17.75	17.87	17.54
	16QAM	1	0	19.0	18.00	18.16	17.85
		1	7	19.0	17.99	17.78	17.99
		1	14	19.0	17.94	17.86	17.78
		8	0	18.0	17.75	17.74	17.60
		8	4	18.0	17.89	17.85	17.64
		8	7	18.0	17.62	17.88	17.54
		15	0	18.0	16.84	17.11	17.03

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26715CH	26865CH	27015CH
5MHz	QPSK	1	0	20.5	19.03	18.99	18.88
		1	13	20.5	19.12	19.09	18.62
		1	24	20.5	19.03	18.78	18.58
		12	0	19.5	19.09	19.03	18.84
		12	6	19.5	18.92	18.79	18.73
		12	13	19.5	18.91	18.53	18.71
		25	0	19.5	18.00	17.75	17.87
	16QAM	1	0	19.0	17.96	17.95	17.93
		1	13	19.0	17.79	17.85	18.00
		1	24	19.0	17.92	17.72	17.84
		12	0	18.0	17.95	17.86	17.89
		12	6	18.0	17.90	17.99	17.72
		12	13	18.0	17.68	17.60	17.57
		25	0	18.0	16.96	17.12	16.98
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26750CH	26865CH	26990CH
10MHz	QPSK	1	0	20.5	18.77	18.67	18.53
		1	25	20.5	18.87	18.75	18.53
		1	49	20.5	18.95	18.62	18.54
		25	0	19.5	18.79	18.56	18.62
		25	13	19.5	18.86	18.68	18.44
		25	25	19.5	18.72	18.55	18.44
		50	0	19.5	17.73	17.71	17.53
	16QAM	1	0	19.0	17.73	17.78	17.84
		1	25	19.0	17.67	17.76	17.72
		1	49	19.0	17.61	17.74	17.71
		25	0	18.0	17.64	17.69	17.55
		25	13	18.0	17.51	17.57	17.47
		25	25	18.0	17.65	17.52	17.40
		50	0	18.0	16.73	16.64	16.77

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26775CH	26865CH	26965CH
15MHz	QPSK	1	0	20.5	19.30	19.04	18.98
		1	38	20.5	19.61	19.92	19.74
		1	74	20.5	19.13	18.68	19.05
		36	0	19.5	18.53	18.75	18.46
		36	18	19.5	18.64	18.83	18.73
		36	39	19.5	18.54	18.73	18.68
		75	0	19.5	18.49	18.60	18.52
	16QAM	1	0	19.0	18.37	18.45	18.46
		1	38	19.0	18.80	18.23	18.96
		1	74	19.0	18.35	17.90	18.20
		36	0	18.0	17.56	17.73	17.51
		36	18	18.0	17.52	17.79	17.78
		36	39	18.0	17.63	17.47	17.68
		75	0	18.0	17.43	17.57	17.55

Table 44: Conducted power measurement results of LTE Band XXVI(Second Antenna)

7.1.13 Conducted power measurements of LTE Band XXXVIII(Second Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37775CH	38000CH	38225CH
5MHz	QPSK	1	0	24.0	22.82	23.63	23.19
		1	13	24.0	22.81	23.56	23.12
		1	24	24.0	22.58	23.11	22.71
		12	0	23.0	21.82	22.59	22.28
		12	6	23.0	21.91	22.39	22.31
		12	13	23.0	21.75	22.31	22.11
		25	0	23.0	21.53	22.15	22.13
	16QAM	1	0	23.0	21.61	22.29	21.92
		1	13	23.0	21.45	22.20	21.92
		1	24	23.0	21.42	21.72	21.51
		12	0	22.0	20.83	21.52	21.32
		12	6	22.0	21.12	21.68	21.35
		12	13	22.0	20.78	21.24	21.31
		25	0	22.0	20.86	21.40	21.44
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37800CH	38000CH	38200CH
10MHz	QPSK	1	0	24.0	23.07	23.82	23.65
		1	25	24.0	23.32	23.84	23.32
		1	49	24.0	23.44	23.72	23.21
		25	0	23.0	21.72	22.41	22.16
		25	13	23.0	21.86	22.32	22.09
		25	25	23.0	22.10	22.30	22.21
		50	0	23.0	21.83	22.31	22.21
	16QAM	1	0	23.0	21.54	22.33	22.02
		1	25	23.0	21.71	22.22	21.94
		1	49	23.0	21.62	21.65	21.63
		25	0	22.0	20.82	21.51	21.32
		25	13	22.0	21.13	21.43	21.39
		25	25	22.0	21.03	21.34	21.24
		50	0	22.0	21.06	21.51	21.22

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37825CH	38000CH	38175CH
15MHz	QPSK	1	0	24.0	23.04	23.69	23.66
		1	38	24.0	23.61	23.75	23.52
		1	74	24.0	23.52	23.48	23.24
		36	0	23.0	21.82	22.34	22.13
		36	18	23.0	22.15	22.32	22.16
		36	39	23.0	22.04	22.23	22.15
		75	0	23.0	21.71	22.14	22.23
	16QAM	1	0	23.0	21.34	22.19	21.89
		1	38	23.0	21.89	22.21	21.83
		1	74	23.0	21.40	21.57	21.48
		36	0	22.0	20.91	21.34	21.21
		36	18	22.0	21.35	21.41	21.36
		36	39	22.0	21.11	21.32	21.31
		75	0	22.0	20.97	21.34	21.25
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37850CH	38000CH	38150CH
20MHz	QPSK	1	0	24.0	22.90	23.85	23.41
		1	50	24.0	23.37	23.79	23.25
		1	99	24.0	23.37	23.24	22.96
		50	0	23.0	21.95	22.35	22.21
		50	25	23.0	22.13	22.55	22.29
		50	50	23.0	22.22	22.16	22.15
		100	0	23.0	22.12	22.26	22.12
	16QAM	1	0	23.0	21.77	22.54	22.64
		1	50	23.0	22.32	22.19	22.13
		1	99	23.0	22.24	22.22	21.69
		50	0	22.0	21.08	21.47	21.41
		50	25	22.0	21.28	21.62	21.35
		50	50	22.0	21.25	21.30	21.42
		100	0	22.0	21.20	21.39	21.27

Table 45: Conducted power measurement results of LTE Band XXXVIII(Second Antenna)

Second antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37775CH	38000CH	38225CH
5MHz	QPSK	1	0	18.0	16.95	16.83	17.32
		1	13	18.0	17.20	17.01	17.68
		1	24	18.0	16.71	16.48	17.33
		12	0	17.0	15.95	15.94	16.50
		12	6	17.0	16.22	15.96	16.63
		12	13	17.0	16.01	15.79	16.55
		25	0	17.0	15.85	15.77	16.68
	16QAM	1	0	17.0	15.02	15.06	15.31
		1	13	17.0	15.06	15.16	15.46
		1	24	17.0	15.04	15.07	15.29
		12	0	16.0	14.38	14.32	14.90
		12	6	16.0	14.47	14.32	15.00
		12	13	16.0	14.31	14.17	14.93
		25	0	16.0	14.23	14.03	15.10
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37800CH	38000CH	38200CH
10MHz	QPSK	1	0	18.0	16.82	16.83	16.97
		1	25	18.0	17.21	17.03	17.66
		1	49	18.0	16.72	16.45	17.43
		25	0	17.0	15.88	15.91	16.22
		25	13	17.0	16.16	15.87	16.51
		25	25	17.0	16.09	15.78	16.52
		50	0	17.0	16.08	15.89	16.49
	16QAM	1	0	17.0	15.19	15.15	15.09
		1	25	17.0	15.16	15.01	15.32
		1	49	17.0	15.04	15.09	15.18
		25	0	16.0	14.34	14.10	14.54
		25	13	16.0	14.48	14.02	14.67
		25	25	16.0	14.38	14.01	14.77
		50	0	16.0	14.38	14.12	14.82

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37825CH	38000CH	38175CH
15MHz	QPSK	1	0	18.0	16.58	16.60	16.43
		1	38	18.0	17.25	17.07	17.34
		1	74	18.0	16.45	16.17	17.06
		36	0	17.0	15.95	15.75	15.89
		36	18	17.0	16.22	15.86	16.23
		36	39	17.0	15.87	15.65	16.48
		75	0	17.0	15.87	15.72	16.25
	16QAM	1	0	17.0	15.09	15.11	15.06
		1	38	17.0	15.18	15.14	15.27
		1	74	17.0	15.03	15.06	15.12
		36	0	16.0	14.32	14.05	14.20
		36	18	16.0	14.46	14.07	14.57
		36	39	16.0	14.12	14.02	14.74
		75	0	16.0	14.09	14.04	14.46
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37850CH	38000CH	38150CH
20MHz	QPSK	1	0	18.0	16.91	17.28	16.78
		1	50	18.0	17.25	17.13	17.21
		1	99	18.0	16.82	16.52	17.20
		50	0	17.0	16.10	15.94	15.84
		50	25	17.0	16.16	16.07	16.10
		50	50	17.0	15.97	15.71	16.51
		100	0	17.0	16.07	15.91	16.27
	16QAM	1	0	17.0	15.09	15.28	15.12
		1	50	17.0	15.36	15.40	15.74
		1	99	17.0	15.03	15.15	15.80
		50	0	16.0	14.45	14.30	14.22
		50	25	16.0	14.40	14.34	14.50
		50	50	16.0	14.26	14.08	14.86
		100	0	16.0	14.29	14.10	14.52

Table 46: Conducted power measurement results of LTE Band XXXVIII(Second Antenna)

Second antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37775CH	38000CH	38225CH
5MHz	QPSK	1	0	18.0	16.95	16.83	17.32
		1	13	18.0	17.20	17.01	17.68
		1	24	18.0	16.71	16.48	17.33
		12	0	17.0	15.95	15.94	16.50
		12	6	17.0	16.22	15.96	16.63
		12	13	17.0	16.01	15.79	16.55
		25	0	17.0	15.85	15.77	16.68
	16QAM	1	0	17.0	15.02	15.06	15.31
		1	13	17.0	15.06	15.16	15.46
		1	24	17.0	15.04	15.07	15.29
		12	0	16.0	14.38	14.32	14.90
		12	6	16.0	14.47	14.32	15.00
		12	13	16.0	14.31	14.17	14.93
		25	0	16.0	14.23	14.03	15.10
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37800CH	38000CH	38200CH
10MHz	QPSK	1	0	18.0	16.82	16.83	16.97
		1	25	18.0	17.21	17.03	17.66
		1	49	18.0	16.72	16.45	17.43
		25	0	17.0	15.88	15.91	16.22
		25	13	17.0	16.16	15.87	16.51
		25	25	17.0	16.09	15.78	16.52
		50	0	17.0	16.08	15.89	16.49
	16QAM	1	0	17.0	15.19	15.15	15.09
		1	25	17.0	15.16	15.01	15.32
		1	49	17.0	15.04	15.09	15.18
		25	0	16.0	14.34	14.10	14.54
		25	13	16.0	14.48	14.02	14.67
		25	25	16.0	14.38	14.01	14.77
		50	0	16.0	14.38	14.12	14.82

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37825CH	38000CH	38175CH
15MHz	QPSK	1	0	18.0	16.58	16.60	16.43
		1	38	18.0	17.25	17.07	17.34
		1	74	18.0	16.45	16.17	17.06
		36	0	17.0	15.95	15.75	15.89
		36	18	17.0	16.22	15.86	16.23
		36	39	17.0	15.87	15.65	16.48
		75	0	17.0	15.87	15.72	16.25
	16QAM	1	0	17.0	15.09	15.11	15.06
		1	38	17.0	15.18	15.14	15.27
		1	74	17.0	15.03	15.06	15.12
		36	0	16.0	14.32	14.05	14.20
		36	18	16.0	14.46	14.07	14.57
		36	39	16.0	14.12	14.02	14.74
		75	0	16.0	14.09	14.04	14.46
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37850CH	38000CH	38150CH
20MHz	QPSK	1	0	18.0	16.91	17.28	16.78
		1	50	18.0	17.25	17.13	17.21
		1	99	18.0	16.82	16.52	17.20
		50	0	17.0	16.10	15.94	15.84
		50	25	17.0	16.16	16.07	16.10
		50	50	17.0	15.97	15.71	16.51
		100	0	17.0	16.07	15.91	16.27
	16QAM	1	0	17.0	15.09	15.28	15.12
		1	50	17.0	15.36	15.40	15.74
		1	99	17.0	15.03	15.15	15.80
		50	0	16.0	14.45	14.30	14.22
		50	25	16.0	14.40	14.34	14.50
		50	50	16.0	14.26	14.08	14.86
		100	0	16.0	14.29	14.10	14.52

Table 47: Conducted power measurement results of LTE Band XXXVIII(Second Antenna)

7.1.14 Conducted power measurements of LTE Band XLI(Second Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40265CH	40740CH	41215CH
5MHz	QPSK	1	0	24.0	23.51	23.72	23.26
		1	13	24.0	23.97	23.99	23.94
		1	24	24.0	23.44	23.38	23.16
		12	0	23.0	22.88	22.25	22.04
		12	6	23.0	22.91	22.31	22.08
		12	13	23.0	22.65	22.00	21.92
		25	0	23.0	22.78	22.15	21.87
	16QAM	1	0	23.0	22.63	22.75	22.45
		1	13	23.0	22.91	22.88	22.61
		1	24	23.0	22.47	22.51	22.36
		12	0	22.0	20.59	20.69	20.78
		12	6	22.0	20.62	20.70	20.74
		12	13	22.0	20.46	20.45	20.60
		25	0	22.0	20.59	20.52	20.49
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40290CH	40740CH	41190CH
10MHz	QPSK	1	0	24.0	23.50	23.57	23.41
		1	25	24.0	23.80	23.83	23.65
		1	49	24.0	23.37	23.40	23.32
		25	0	23.0	22.65	22.74	22.63
		25	13	23.0	22.66	22.76	22.44
		25	25	23.0	22.56	22.65	22.39
		50	0	23.0	22.58	22.65	22.33
	16QAM	1	0	23.0	22.55	22.49	22.26
		1	25	23.0	22.73	22.58	22.43
		1	49	23.0	22.34	22.33	22.22
		25	0	22.0	20.48	20.42	20.66
		25	13	22.0	20.61	20.46	20.49
		25	25	22.0	20.22	20.31	20.37
		50	0	22.0	20.37	20.29	20.27

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40315CH	40740CH	41165CH
15MHz	QPSK	1	0	24.0	23.22	23.51	23.11
		1	38	24.0	23.75	23.93	23.60
		1	74	24.0	22.78	23.24	23.22
		36	0	23.0	22.77	22.76	22.56
		36	18	23.0	22.49	22.78	22.55
		36	39	23.0	22.44	22.65	22.50
		75	0	23.0	22.40	22.63	22.51
	16QAM	1	0	23.0	22.48	22.57	22.36
		1	38	23.0	22.68	22.56	22.42
		1	74	23.0	22.03	22.46	22.37
		36	0	22.0	20.32	20.51	20.63
		36	18	22.0	20.57	20.44	20.57
		36	39	22.0	20.22	20.49	20.48
		75	0	22.0	20.41	20.57	20.44
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40340CH	40740CH	41140CH
20MHz	QPSK	1	0	24.0	23.34	23.59	23.17
		1	50	24.0	23.37	23.71	23.34
		1	99	24.0	22.91	23.50	23.33
		50	0	23.0	22.09	22.12	22.06
		50	25	23.0	21.84	22.15	22.14
		50	50	23.0	21.63	21.94	21.78
		100	0	23.0	21.90	21.95	21.80
	16QAM	1	0	23.0	21.62	21.97	21.95
		1	50	23.0	21.98	22.25	21.80
		1	99	23.0	21.42	21.94	21.55
		50	0	22.0	20.74	20.80	20.89
		50	25	22.0	20.55	20.79	20.91
		50	50	22.0	20.27	20.61	20.58
		100	0	22.0	20.63	20.63	20.67

Table 48: Conducted power measurement results of LTE Band XLI(Second Antenna)

Second antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40265CH	40740CH	41215CH
5MHz	QPSK	1	0	18.0	17.55	17.55	17.65
		1	13	18.0	17.73	17.80	17.78
		1	24	18.0	17.30	17.29	17.21
		12	0	17.0	16.57	16.51	16.73
		12	6	17.0	16.63	16.56	16.65
		12	13	17.0	16.37	16.33	16.47
		25	0	17.0	16.52	16.39	16.46
	16QAM	1	0	17.0	15.20	15.12	15.41
		1	13	17.0	15.58	15.19	15.55
		1	24	17.0	15.13	15.05	15.11
		12	0	16.0	14.87	14.86	14.88
		12	6	16.0	14.94	14.82	14.84
		12	13	16.0	14.72	14.60	14.70
		25	0	16.0	14.80	14.65	14.75
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40290CH	40740CH	41190CH
10MHz	QPSK	1	0	18.0	17.51	17.51	17.61
		1	25	18.0	17.72	17.74	17.72
		1	49	18.0	17.31	17.21	17.20
		25	0	17.0	16.55	16.50	16.71
		25	13	17.0	16.61	16.51	16.64
		25	25	17.0	16.35	16.37	16.45
		50	0	17.0	16.53	16.35	16.45
	16QAM	1	0	17.0	15.21	15.17	15.42
		1	25	17.0	15.55	15.14	15.51
		1	49	17.0	15.14	15.01	15.14
		25	0	16.0	14.87	14.80	14.85
		25	13	16.0	14.92	14.80	14.81
		25	25	16.0	14.70	14.62	14.79
		50	0	16.0	14.81	14.69	14.70

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40315CH	40740CH	41165CH
15MHz	QPSK	1	0	18.0	17.11	17.49	17.81
		1	38	18.0	17.30	17.75	17.95
		1	74	18.0	16.91	17.37	17.40
		36	0	17.0	16.27	16.54	16.81
		36	18	17.0	16.02	16.41	16.88
		36	39	17.0	15.93	16.28	16.51
		75	0	17.0	16.15	16.36	16.65
	16QAM	1	0	17.0	15.05	15.29	15.34
		1	38	17.0	15.11	15.48	15.75
		1	74	17.0	15.03	15.01	15.16
		36	0	16.0	14.52	14.72	15.26
		36	18	16.0	14.40	14.78	15.20
		36	39	16.0	14.20	14.58	14.75
		75	0	16.0	14.48	14.59	14.85
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40340CH	40740CH	41140CH
20MHz	QPSK	1	0	18.0	17.15	17.47	17.88
		1	50	18.0	17.36	17.74	17.94
		1	99	18.0	16.97	17.38	17.41
		50	0	17.0	16.27	16.55	16.87
		50	25	17.0	16.07	16.48	16.90
		50	50	17.0	15.91	16.27	16.55
		100	0	17.0	16.16	16.32	16.65
	16QAM	1	0	17.0	15.09	15.26	15.38
		1	50	17.0	15.12	15.44	15.73
		1	99	17.0	15.01	15.09	15.12
		50	0	16.0	14.51	14.73	15.22
		50	25	16.0	14.41	14.71	15.21
		50	50	16.0	14.25	14.57	14.78
		100	0	16.0	14.46	14.59	14.91

Table 49: Conducted power measurement results of LTE Band XLI(Second Antenna)

Second antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40265CH	40740CH	41215CH
5MHz	QPSK	1	0	18.0	17.55	17.55	17.65
		1	13	18.0	17.73	17.80	17.78
		1	24	18.0	17.30	17.29	17.21
		12	0	17.0	16.57	16.51	16.73
		12	6	17.0	16.63	16.56	16.65
		12	13	17.0	16.37	16.33	16.47
		25	0	17.0	16.52	16.39	16.46
	16QAM	1	0	17.0	15.20	15.12	15.41
		1	13	17.0	15.58	15.19	15.55
		1	24	17.0	15.13	15.05	15.11
		12	0	16.0	14.87	14.86	14.88
		12	6	16.0	14.94	14.82	14.84
		12	13	16.0	14.72	14.60	14.70
		25	0	16.0	14.80	14.65	14.75
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40290CH	40740CH	41190CH
10MHz	QPSK	1	0	18.0	17.51	17.51	17.61
		1	25	18.0	17.72	17.74	17.72
		1	49	18.0	17.31	17.21	17.20
		25	0	17.0	16.55	16.50	16.71
		25	13	17.0	16.61	16.51	16.64
		25	25	17.0	16.35	16.37	16.45
		50	0	17.0	16.53	16.35	16.45
	16QAM	1	0	17.0	15.21	15.17	15.42
		1	25	17.0	15.55	15.14	15.51
		1	49	17.0	15.14	15.01	15.14
		25	0	16.0	14.87	14.80	14.85
		25	13	16.0	14.92	14.80	14.81
		25	25	16.0	14.70	14.62	14.79
		50	0	16.0	14.81	14.69	14.70

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40315CH	40740CH	41165CH
15MHz	QPSK	1	0	18.0	17.11	17.49	17.81
		1	38	18.0	17.30	17.75	17.95
		1	74	18.0	16.91	17.37	17.40
		36	0	17.0	16.27	16.54	16.81
		36	18	17.0	16.02	16.41	16.88
		36	39	17.0	15.93	16.28	16.51
		75	0	17.0	16.15	16.36	16.65
	16QAM	1	0	17.0	15.05	15.29	15.34
		1	38	17.0	15.11	15.48	15.75
		1	74	17.0	15.03	15.01	15.16
		36	0	16.0	14.52	14.72	15.26
		36	18	16.0	14.40	14.78	15.20
		36	39	16.0	14.20	14.58	14.75
		75	0	16.0	14.48	14.59	14.85
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40340CH	40740CH	41140CH
20MHz	QPSK	1	0	18.0	17.15	17.47	17.88
		1	50	18.0	17.36	17.74	17.94
		1	99	18.0	16.97	17.38	17.41
		50	0	17.0	16.27	16.55	16.87
		50	25	17.0	16.07	16.48	16.90
		50	50	17.0	15.91	16.27	16.55
		100	0	17.0	16.16	16.32	16.65
	16QAM	1	0	17.0	15.09	15.26	15.38
		1	50	17.0	15.12	15.44	15.73
		1	99	17.0	15.01	15.09	15.12
		50	0	16.0	14.51	14.73	15.22
		50	25	16.0	14.41	14.71	15.21
		50	50	16.0	14.25	14.57	14.78
		100	0	16.0	14.46	14.59	14.91

Table 50: Conducted power measurement results of LTE Band XLI(Second Antenna)

7.1.15 Conducted power measurements of GSM850(Main Antenna)

Full Power:

GSM850		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	128CH	190CH	251CH		Tune-up	128CH	190CH	251CH
GSM (CS)		33.0	32.38	32.46	32.48	-9.19	23.81	23.19	23.27	23.29
GPRS/ EDGE (GMSK)	1 Tx Slot	33.0	32.27	32.50	32.52	-9.19	23.81	23.08	23.31	23.33
	2 Tx Slots	31.0	29.65	29.95	30.07	-6.13	24.87	23.52	23.82	23.94
	3 Tx Slots	29.0	27.56	27.81	27.87	-4.42	24.58	23.14	23.39	23.45
	4 Tx Slots	27.0	25.58	25.84	25.92	-3.18	23.82	22.40	22.66	22.74
EDGE (8PSK)	1 Tx Slot	26.5	25.50	25.67	25.70	-9.19	17.31	16.31	16.48	16.51
	2 Tx Slots	24.5	23.20	23.35	23.36	-6.13	18.37	17.07	17.22	17.23
	3 Tx Slots	22.5	21.53	21.68	21.79	-4.42	18.08	17.11	17.26	17.37
	4 Tx Slots	20.5	19.52	19.71	19.73	-3.18	17.32	16.34	16.53	16.55

Table 51: Conducted power measurement results of GSM850(Main Antenna)

Note:

- 1) The conducted power of GSM850 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.16 Conducted power measurements of GSM1900(Main Antenna)

Full Power:

GSM1900		Burst-Averaged output Power (dBm)				Division Factors	Frame-Averaged output Power (dBm)			
		Tune-up	512CH	661CH	810CH		Tune-up	512CH	661CH	810CH
GSM (CS)		30.2	29.73	29.70	29.88	-9.19	21.01	20.54	20.51	20.69
GPRS/ EDGE (GMSK)	1 Tx Slot	30.2	29.71	29.73	29.87	-9.19	21.01	20.52	20.54	20.68
	2 Tx Slots	28.2	27.08	26.80	26.92	-6.13	22.07	20.95	20.67	20.79
	3 Tx Slots	26.2	24.85	24.53	24.63	-4.42	21.78	20.43	20.11	20.21
	4 Tx Slots	24.2	23.97	22.57	22.59	-3.18	21.02	20.79	19.39	19.41
EDGE (8PSK)	1 Tx Slot	26.2	25.07	24.88	24.83	-9.19	17.01	15.88	15.69	15.64
	2 Tx Slots	24.2	22.76	22.51	22.64	-6.13	18.07	16.63	16.38	16.51
	3 Tx Slots	22.2	21.23	20.99	20.83	-4.42	17.78	16.81	16.57	16.41
	4 Tx Slots	20.2	19.36	19.03	18.93	-3.18	17.02	16.18	15.85	15.75

Table 52: Conducted power measurement results of GSM1900(Main Antenna)

Note:

- 1) The conducted power of GSM1900 is measured with RMS detector.
- 2) Frame-averaged output power was calculated from the measured burst-averaged output power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- 3) Per KDB941225 D01v03, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

7.1.17 Conducted power measurements of UMTS Band II(Main Antenna)

Full Power:

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	24.0	23.81	23.79	23.83
	12.2kbps AMR	24.0	23.77	23.71	23.81
HSDPA	Subtest 1	24.0	22.44	22.45	22.37
	Subtest 2	23.0	22.42	22.37	22.31
	Subtest 3	22.5	22.02	22.01	21.95
	Subtest 4	22.5	22.03	22.01	22.00
HSUPA	Subtest 1	21.0	20.21	20.18	20.17
	Subtest 2	21.0	19.52	19.43	19.39
	Subtest 3	21.0	19.99	19.71	19.85
	Subtest 4	21.0	19.76	19.64	19.77
	Subtest 5	21.0	20.55	20.43	20.50
DC-HSDPA	Subtest 1	24.0	22.48	22.49	22.47
	Subtest 2	23.0	22.42	22.34	22.35
	Subtest 3	22.5	22.05	22.06	21.96
	Subtest 4	22.5	22.01	22.03	22.04

Table 53: Conducted power measurement results of UMTS Band II(Main Antenna)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Main antenna + WiFi Station:

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	21.5	20.79	20.69	20.76
	12.2kbps AMR	21.5	20.77	20.69	20.75
HSDPA	Subtest 1	21.0	19.35	19.47	19.29
	Subtest 2	20.5	19.45	19.43	19.42
	Subtest 3	20.0	19.07	19.15	19.04
	Subtest 4	20.0	19.31	19.21	19.03
HSUPA	Subtest 1	18.5	17.11	17.16	16.85
	Subtest 2	18.5	17.13	17.01	16.86
	Subtest 3	18.5	16.87	16.55	16.67
	Subtest 4	18.5	16.8	16.65	16.58
	Subtest 5	18.5	17.15	17.33	17.19
DC-HSDPA	Subtest 1	21.0	19.35	19.49	19.26
	Subtest 2	20.5	19.44	19.41	19.37
	Subtest 3	20.0	19.05	19.17	19.06
	Subtest 4	20.0	19.30	19.24	19.02

Table 54: Conducted power measurement results of UMTS Band II(Main Antenna)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Main antenna + WiFi Hotspot:

UMTS Band II		Tune-up	Conducted Power (dBm)		
			9262CH	9400CH	9538CH
WCDMA	12.2kbps RMC	21.0	20.28	20.21	20.22
	12.2kbps AMR	21.0	20.26	20.23	20.24
HSDPA	Subtest 1	21.0	19.07	19.1	19.08
	Subtest 2	20.0	19.05	19.09	18.99
	Subtest 3	19.5	18.76	18.61	18.54
	Subtest 4	19.5	18.93	18.74	18.61
HSUPA	Subtest 1	18.0	16.92	16.85	16.86
	Subtest 2	18.0	16.2	16.05	16.11
	Subtest 3	18.0	17.44	17.46	17.47
	Subtest 4	18.0	16.71	16.63	16.57
	Subtest 5	18.0	17.57	16.8	16.95
DC-HSDPA	Subtest 1	21.0	19.06	19.1	19.08
	Subtest 2	20.0	19.03	19.08	18.99
	Subtest 3	19.5	18.72	18.6	18.54
	Subtest 4	19.5	18.95	18.72	18.61

Table 55: Conducted power measurement results of UMTS Band II(Main Antenna)

Note:

- 1) The conducted power of UMTS Band II is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.18 Conducted power measurements of UMTS Band IV(Main Antenna)

Full Power:

UMTS Band IV		Tune-up	Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	24.0	23.63	23.55	23.56
	12.2kbps AMR	24.0	23.62	23.56	23.55
HSDPA	Subtest 1	23.5	22.15	22.26	22.04
	Subtest 2	23.0	22.23	22.24	22.20
	Subtest 3	22.5	21.80	21.84	21.72
	Subtest 4	22.5	21.82	21.83	21.73
HSUPA	Subtest 1	21.5	19.92	19.92	19.90
	Subtest 2	21.0	19.21	19.33	19.15
	Subtest 3	21.0	20.68	20.74	20.75
	Subtest 4	21.5	19.62	19.55	19.61
	Subtest 5	21.5	20.41	20.25	20.85
DC-HSDPA	Subtest 1	23.5	22.15	22.26	22.14
	Subtest 2	23.0	22.25	22.24	22.30
	Subtest 3	22.5	21.80	21.81	21.75
	Subtest 4	22.5	21.72	21.82	21.71

Table 56: Conducted power measurement results of UMTS Band IV(Main Antenna)

Note:

- 1) The conducted power of UMTS Band IV is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Main antenna + WiFi Station:

UMTS Band IV		Tune-up	Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	21.5	21.11	21.12	21.07
	12.2kbps AMR	21.5	21.13	21.13	21.05
HSDPA	Subtest 1	21.0	19.27	19.59	19.26
	Subtest 2	20.5	19.52	19.51	19.50
	Subtest 3	20.0	18.98	18.92	19.00
	Subtest 4	20.0	19.08	19.01	19.51
HSUPA	Subtest 1	19.0	17.31	17.32	17.55
	Subtest 2	18.5	16.54	16.68	16.62
	Subtest 3	18.5	17.83	17.82	17.83
	Subtest 4	19.0	17.05	17.09	17.10
	Subtest 5	19.0	17.42	17.58	17.85
DC-HSDPA	Subtest 1	21.0	19.29	19.56	19.36
	Subtest 2	20.5	19.50	19.53	19.45
	Subtest 3	20.0	18.92	18.95	19.00
	Subtest 4	20.0	19.06	19.03	19.83

Table 57: Conducted power measurement results of UMTS Band IV(Main Antenna)

Note:

- 1) The conducted power of UMTS Band IV is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

Main antenna + WiFi Hotspot:

UMTS Band IV		Tune-up	Conducted Power (dBm)		
			1312CH	1413CH	1513CH
WCDMA	12.2kbps RMC	23.5	23.14	23.12	23.06
	12.2kbps AMR	23.5	23.13	23.11	23.06
HSDPA	Subtest 1	23.0	21.77	21.63	21.58
	Subtest 2	22.5	21.65	21.74	21.75
	Subtest 3	22.0	21.40	21.37	21.28
	Subtest 4	22.0	21.41	21.35	21.28
HSUPA	Subtest 1	21.0	19.44	19.55	19.72
	Subtest 2	20.5	19.43	19.50	18.76
	Subtest 3	20.5	19.88	19.74	19.84
	Subtest 4	21.0	19.04	19.09	19.15
	Subtest 5	21.0	19.45	19.64	19.92
DC-HSDPA	Subtest 1	23.0	21.79	21.61	21.65
	Subtest 2	22.5	21.66	21.74	21.71
	Subtest 3	22.0	21.42	21.34	21.27
	Subtest 4	22.0	21.44	21.37	21.28

Table 58: Conducted power measurement results of UMTS Band IV(Main Antenna)

Note:

- 1) The conducted power of UMTS Band IV is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03r01, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.19 Conducted power measurements of UMTS Band V(Main Antenna)

Full Power:

UMTS Band V		Tune-up	Conducted Power (dBm)		
			4132CH	4182CH	4233CH
WCDMA	12.2kbps RMC	24.5	23.78	23.88	23.87
	12.2kbps AMR	24.5	23.74	23.80	23.82
HSDPA	Subtest 1	24.0	22.57	22.59	22.49
	Subtest 2	23.5	22.54	22.57	22.45
	Subtest 3	23.0	22.15	22.17	22.11
	Subtest 4	23.0	22.17	22.15	22.09
HSUPA	Subtest 1	22.0	20.18	20.09	20.04
	Subtest 2	21.0	19.34	20.18	20.30
	Subtest 3	21.0	19.91	20.05	19.97
	Subtest 4	21.0	19.92	19.74	19.87
	Subtest 5	21.5	20.46	20.19	20.43
DC-HSDPA	Subtest 1	24.0	22.59	22.59	22.48
	Subtest 2	23.5	22.52	22.54	22.45
	Subtest 3	23.0	22.11	22.15	22.16
	Subtest 4	23.0	22.19	22.13	22.04

Table 59: Conducted power measurement results of UMTS Band V(Main Antenna)

Note:

- 1) The conducted power of UMTS Band V is measured with RMS detector.
- 2) The bolded 12.2kbps RMC mode was selected for SAR testing(the primary mode).
- 3) Per KDB941225 D01v03, When the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest *reported* SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

7.1.20 Conducted power measurements of LTE Band II(Main Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	23.7	22.81	22.74	23.26
		1	3	23.7	22.78	22.76	23.39
		1	5	23.7	22.69	22.69	23.46
		3	0	23.7	22.70	22.76	23.33
		3	2	23.7	22.65	22.68	23.39
		3	3	23.7	22.65	22.67	23.41
		6	0	23.0	21.95	21.86	22.41
	16QAM	1	0	23.0	22.03	21.99	22.42
		1	3	23.0	22.03	21.85	22.72
		1	5	23.0	21.73	21.77	22.75
		3	0	23.0	21.77	21.94	22.50
		3	2	23.0	21.75	21.89	22.50
		3	3	23.0	21.73	21.88	22.55
		6	0	22.0	20.75	20.97	21.50
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	23.7	22.74	22.77	23.05
		1	7	23.7	22.37	22.41	22.44
		1	14	23.7	22.53	22.62	22.58
		8	0	23.0	22.26	22.25	22.25
		8	4	23.0	22.34	22.35	22.33
		8	7	23.0	22.40	22.40	22.45
		15	0	23.0	22.33	22.34	22.38
	16QAM	1	0	23.0	21.06	21.90	22.12
		1	7	23.0	22.08	22.15	22.45
		1	14	23.0	21.65	21.91	22.38
		8	0	22.0	21.18	21.09	21.17
		8	4	22.0	21.29	20.98	21.33
		8	7	22.0	21.42	20.99	21.43
		15	0	22.0	21.32	20.96	21.30

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	23.7	22.65	22.90	22.73
		1	13	23.7	23.11	22.97	23.22
		1	24	23.7	22.94	22.58	23.28
		12	0	23.0	21.88	21.98	21.99
		12	6	23.0	21.98	22.03	22.22
		12	13	23.0	21.91	21.88	22.32
		25	0	23.0	21.85	21.93	22.27
	16QAM	1	0	23.0	21.81	22.19	21.92
		1	13	23.0	22.19	22.31	22.46
		1	24	23.0	21.94	21.93	22.58
		12	0	22.0	21.00	21.12	21.17
		12	6	22.0	21.05	21.16	21.33
		12	13	22.0	20.97	21.00	21.35
		25	0	22.0	20.88	21.04	21.30
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	23.7	22.85	22.81	22.82
		1	25	23.7	23.11	23.29	23.15
		1	49	23.7	22.90	22.71	23.21
		25	0	23.0	22.02	22.01	21.83
		25	13	23.0	22.24	22.22	22.10
		25	25	23.0	22.12	22.15	22.45
		50	0	23.0	22.33	22.33	22.47
	16QAM	1	0	23.0	22.24	22.35	21.91
		1	25	23.0	22.62	22.69	22.31
		1	49	23.0	22.32	22.44	22.63
		25	0	22.0	21.26	21.27	20.81
		25	13	22.0	21.42	21.39	21.22
		25	25	22.0	21.45	21.47	21.65
		50	0	22.0	21.55	21.52	21.53

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	23.7	22.61	22.66	23.36
		1	38	23.7	23.03	23.02	23.04
		1	74	23.7	22.74	22.74	22.78
		36	0	23.0	22.29	21.14	21.15
		36	18	23.0	22.70	21.85	21.86
		36	39	23.0	22.02	22.00	22.01
		75	0	23.0	21.61	21.60	22.12
	16QAM	1	0	23.0	21.66	21.61	22.45
		1	38	23.0	22.61	22.30	22.02
		1	74	23.0	21.69	21.98	22.25
		36	0	22.0	21.31	21.03	20.69
		36	18	22.0	21.46	21.31	20.82
		36	39	22.0	20.96	21.16	21.01
		75	0	22.0	21.20	20.94	21.28
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	23.7	22.54	22.31	23.31
		1	50	23.7	22.28	21.71	21.75
		1	99	23.7	21.91	22.86	22.83
		50	0	23.0	22.45	21.70	22.33
		50	25	23.0	22.11	22.32	21.91
		50	50	23.0	21.60	22.19	22.33
		100	0	23.0	22.35	21.88	22.31
	16QAM	1	0	23.0	22.00	21.63	22.71
		1	50	23.0	22.74	22.28	22.09
		1	99	23.0	21.21	22.26	22.37
		50	0	22.0	21.35	20.79	21.32
		50	25	22.0	20.95	21.63	21.01
		50	50	22.0	20.55	21.35	21.44
		100	0	22.0	21.39	20.98	21.40

Table 60: Conducted power measurement results of LTE Band II(Main Antenna)

Main antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	22.7	21.94	22.02	22.04
		1	3	22.7	21.89	22.10	22.01
		1	5	22.7	21.87	21.95	21.98
		3	0	22.7	21.88	22.08	21.97
		3	2	22.7	21.86	22.00	22.02
		3	3	22.7	21.85	22.01	21.97
	16QAM	6	0	22.0	20.92	21.11	21.08
		1	0	22.0	21.12	21.28	21.20
		1	3	22.0	21.22	21.30	21.48
		1	5	22.0	21.16	21.21	21.23
		3	0	22.0	21.05	21.32	21.83
		3	2	22.0	21.07	21.19	21.85
		3	3	22.0	21.05	21.30	21.85
6	0	21.0	20.03	20.20	20.77		
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	22.7	21.84	22.10	22.19
		1	7	22.7	22.09	22.24	22.04
		1	14	22.7	21.88	21.94	22.07
		8	0	22.0	21.00	21.18	21.39
		8	4	22.0	21.10	21.19	21.61
		8	7	22.0	20.95	21.13	21.67
		15	0	22.0	21.04	21.17	21.59
	16QAM	1	0	22.0	20.92	21.31	21.31
		1	7	22.0	21.38	21.40	21.85
		1	14	22.0	20.92	21.15	21.86
		8	0	21.0	20.09	20.25	20.49
		8	4	21.0	20.17	20.25	20.66
		8	7	21.0	20.11	20.19	20.68
15		0	21.0	20.06	20.17	20.55	

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	22.7	21.87	22.19	21.93
		1	13	22.7	22.29	22.34	22.24
		1	24	22.7	22.10	21.93	22.51
		12	0	22.0	21.19	21.28	21.25
		12	6	22.0	21.25	21.33	21.49
		12	13	22.0	21.16	21.22	21.58
		25	0	22.0	21.11	21.24	21.54
	16QAM	1	0	22.0	21.10	21.47	21.14
		1	13	22.0	21.41	21.57	21.78
		1	24	22.0	21.23	21.27	21.84
		12	0	21.0	20.26	20.37	20.41
		12	6	21.0	20.39	20.36	20.62
		12	13	21.0	20.23	20.16	20.58
		25	0	21.0	20.16	20.26	20.55
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	22.7	21.78	21.95	21.84
		1	25	22.7	22.54	22.27	22.05
		1	49	22.7	22.23	22.00	22.43
		25	0	22.0	21.17	21.19	20.89
		25	13	22.0	21.43	21.28	21.16
		25	25	22.0	21.49	21.28	21.50
		50	0	22.0	21.29	21.42	21.57
	16QAM	1	0	22.0	21.26	21.31	21.23
		1	25	22.0	21.90	21.70	21.36
		1	49	22.0	21.57	21.51	21.79
		25	0	21.0	20.14	20.13	19.84
		25	13	21.0	20.40	20.31	20.20
		25	25	21.0	20.35	20.33	20.53
		50	0	21.0	20.27	20.39	20.62

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	22.7	21.59	21.63	22.39
		1	38	22.7	22.53	22.26	21.93
		1	74	22.7	21.65	21.91	22.10
		36	0	22.0	21.51	21.28	20.93
		36	18	22.0	21.73	21.54	21.02
		36	39	22.0	21.20	21.34	21.25
		75	0	22.0	21.45	21.17	21.50
	16QAM	1	0	22.0	20.96	20.78	21.66
		1	38	22.0	21.72	21.57	21.26
		1	74	22.0	20.85	21.34	21.51
		36	0	21.0	20.46	20.22	19.90
		36	18	21.0	20.63	20.50	20.04
		36	39	21.0	20.17	20.39	20.29
		75	0	21.0	20.38	20.18	20.57
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	22.7	21.62	21.28	22.44
		1	50	22.7	22.38	22.29	21.69
		1	99	22.7	21.15	22.00	21.95
		50	0	22.0	21.36	20.76	21.67
		50	25	22.0	21.07	21.40	21.17
		50	50	22.0	20.69	21.32	21.51
		100	0	22.0	21.34	20.90	21.62
	16QAM	1	0	22.0	20.64	20.42	21.54
		1	50	22.0	21.97	21.81	21.61
		1	99	22.0	20.56	21.53	21.39
		50	0	21.0	20.32	19.78	20.62
		50	25	21.0	19.96	20.41	20.10
		50	50	21.0	19.59	20.34	20.50
		100	0	21.0	20.25	19.90	20.62

Table 61: Conducted power measurement results of LTE Band II(Main Antenna)

Main antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18607CH	18900CH	19193CH
1.4MHz	QPSK	1	0	19.2	18.16	18.38	18.71
		1	3	19.2	18.17	18.44	18.84
		1	5	19.2	18.16	18.34	18.90
		3	0	19.2	18.16	18.42	18.77
		3	2	19.2	18.15	18.39	18.80
		3	3	19.2	18.13	18.38	18.81
		6	0	18.5	17.07	17.31	17.81
	16QAM	1	0	18.5	17.41	17.41	17.79
		1	3	18.5	17.42	17.43	17.94
		1	5	18.5	17.23	17.35	17.92
		3	0	18.5	17.08	17.52	17.84
		3	2	18.5	17.14	17.45	17.90
		3	3	18.5	17.05	17.49	17.87
		6	0	17.5	16.09	16.39	16.81
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18615CH	18900CH	19185CH
3MHz	QPSK	1	0	19.2	18.05	18.25	18.51
		1	7	19.2	18.30	18.48	18.85
		1	14	19.2	18.04	18.25	18.85
		8	0	18.5	17.13	17.37	17.63
		8	4	18.5	17.25	17.39	17.75
		8	7	18.5	17.16	17.32	17.76
		15	0	18.5	17.17	17.35	17.70
	16QAM	1	0	18.5	17.13	17.39	17.71
		1	7	18.5	17.44	17.47	17.83
		1	14	18.5	17.10	17.37	17.72
		8	0	17.5	16.11	16.39	16.57
		8	4	17.5	16.24	16.42	16.66
		8	7	17.5	16.15	16.34	16.73
		15	0	17.5	16.13	16.28	16.54



Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18625CH	18900CH	19175CH
5MHz	QPSK	1	0	19.2	18.24	18.22	18.11
		1	13	19.2	18.65	18.62	18.76
		1	24	19.2	18.30	18.27	18.57
		12	0	18.5	17.42	17.40	17.45
		12	6	18.5	17.49	17.47	17.69
		12	13	18.5	17.34	17.32	17.65
		25	0	18.5	17.37	17.35	17.73
	16QAM	1	0	18.5	17.29	17.40	17.27
		1	13	18.5	17.57	17.78	17.84
		1	24	18.5	17.37	17.47	17.68
		12	0	17.5	16.25	16.35	16.31
		12	6	17.5	16.32	16.44	16.55
		12	13	17.5	16.18	16.30	16.51
		25	0	17.5	16.15	16.31	16.65
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18650CH	18900CH	19150CH
10MHz	QPSK	1	0	19.2	17.93	17.84	17.91
		1	25	19.2	18.55	18.53	18.41
		1	49	19.2	18.28	18.25	18.60
		25	0	18.5	17.30	17.28	17.07
		25	13	18.5	17.43	17.41	17.35
		25	25	18.5	17.48	17.46	17.69
		50	0	18.5	17.55	17.53	17.68
	16QAM	1	0	18.5	17.32	17.30	17.06
		1	25	18.5	17.87	17.85	17.62
		1	49	18.5	17.68	17.66	17.76
		25	0	17.5	16.21	16.19	15.96
		25	13	17.5	16.41	16.39	16.23
		25	25	17.5	16.40	16.39	16.62
		50	0	17.5	16.48	16.46	16.57

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18675CH	18900CH	19125CH
15MHz	QPSK	1	0	19.2	17.72	17.45	18.09
		1	38	19.2	18.44	18.55	18.25
		1	74	19.2	17.46	18.04	18.28
		36	0	18.5	17.57	17.27	16.81
		36	18	18.5	17.60	17.62	17.16
		36	39	18.5	17.13	17.44	17.37
		75	0	18.5	17.36	17.24	17.62
	16QAM	1	0	18.5	16.73	16.76	17.23
		1	38	18.5	17.92	17.89	17.41
		1	74	18.5	17.50	17.53	17.41
		36	0	17.5	16.14	16.18	15.65
		36	18	17.5	16.57	16.55	15.98
		36	39	17.5	16.42	16.40	16.24
		75	0	17.5	16.16	16.14	16.41
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					18700CH	18900CH	19100CH
20MHz	QPSK	1	0	19.2	17.62	17.37	18.25
		1	50	19.2	18.67	18.52	18.25
		1	99	19.2	17.23	17.81	18.04
		50	0	18.5	17.34	16.82	17.52
		50	25	18.5	17.01	17.55	17.15
		50	50	18.5	16.60	17.33	17.48
		100	0	18.5	17.27	16.96	17.48
	16QAM	1	0	18.5	16.99	16.55	17.44
		1	50	18.5	17.88	17.92	17.42
		1	99	18.5	16.53	17.23	17.27
		50	0	17.5	16.29	15.63	16.21
		50	25	17.5	15.86	16.49	16.01
		50	50	17.5	15.53	16.22	16.43
		100	0	17.5	16.09	15.87	16.36

Table 62: Conducted power measurement results of LTE Band II(Main Antenna)

7.1.21 Conducted power measurements of LTE Band IV(Main Antenna)

Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	23.8	22.59	22.79	23.27
		1	3	23.8	22.62	22.69	23.31
		1	5	23.8	22.53	22.62	23.19
		3	0	23.8	22.50	22.78	23.29
		3	2	23.8	22.55	22.71	23.30
		3	3	23.8	22.51	22.68	23.25
		6	0	23.0	21.59	21.77	22.23
	16QAM	1	0	23.0	21.82	22.02	22.56
		1	3	23.0	21.81	21.84	22.62
		1	5	23.0	21.80	21.85	22.49
		3	0	23.0	21.69	21.88	22.47
		3	2	23.0	21.71	21.87	22.47
		3	3	23.0	21.69	21.79	22.43
		6	0	22.0	20.78	20.83	21.42
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	23.8	22.52	22.65	23.19
		1	7	23.8	22.80	22.82	23.33
		1	14	23.8	22.56	22.45	23.14
		8	0	23.0	21.66	21.76	22.29
		8	4	23.0	21.76	21.74	22.26
		8	7	23.0	21.71	21.65	22.21
		15	0	23.0	21.76	21.73	22.23
	16QAM	1	0	23.0	21.55	21.80	22.36
		1	7	23.0	21.96	22.16	22.50
		1	14	23.0	21.64	21.64	22.07
		8	0	22.0	20.75	20.94	21.49
		8	4	22.0	20.87	20.92	21.40
		8	7	22.0	20.78	20.80	21.36
		15	0	22.0	20.82	20.79	21.35

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	23.8	23.06	22.98	23.20
		1	13	23.8	23.01	23.03	23.46
		1	24	23.8	22.97	22.95	23.03
		12	0	23.0	22.98	22.97	22.43
		12	6	23.0	22.96	22.99	22.42
		12	13	23.0	22.93	22.92	22.24
		25	0	23.0	22.00	21.99	22.23
	16QAM	1	0	23.0	21.71	21.99	22.58
		1	13	23.0	22.12	22.17	22.88
		1	24	23.0	21.88	21.70	22.45
		12	0	22.0	20.95	20.94	21.56
		12	6	22.0	21.01	21.03	21.57
		12	13	22.0	20.95	20.83	21.39
		25	0	22.0	20.92	20.88	21.29
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	23.8	22.96	22.75	22.91
		1	25	23.8	23.24	22.91	23.15
		1	49	23.8	22.91	22.42	23.04
		25	0	23.0	21.98	21.91	22.08
		25	13	23.0	21.94	21.81	22.27
		25	25	23.0	22.03	21.74	22.11
		50	0	23.0	22.13	21.77	22.03
	16QAM	1	0	23.0	22.48	22.36	22.25
		1	25	23.0	22.51	22.37	22.29
		1	49	23.0	22.39	22.22	21.95
		25	0	22.0	21.01	21.09	21.00
		25	13	22.0	20.97	21.04	20.89
		25	25	22.0	21.07	21.14	20.84
		50	0	22.0	21.15	21.19	20.87

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	23.8	22.87	22.95	22.75
		1	38	23.8	22.93	22.92	23.28
		1	74	23.8	22.59	22.56	23.15
		36	0	23.0	21.98	22.02	22.05
		36	18	23.0	22.00	22.05	22.14
		36	39	23.0	21.87	21.90	22.11
		75	0	23.0	21.92	21.86	22.12
	16QAM	1	0	23.0	22.47	22.25	22.14
		1	38	23.0	22.40	22.27	22.55
		1	74	23.0	22.23	22.07	22.32
		36	0	22.0	21.11	21.10	21.11
		36	18	22.0	21.10	21.18	21.21
		36	39	22.0	20.97	21.03	21.16
		75	0	22.0	21.10	20.99	21.16
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	23.8	22.90	23.01	22.52
		1	50	23.8	23.35	22.91	23.09
		1	99	23.8	22.58	22.60	23.10
		50	0	23.0	22.16	22.10	21.93
		50	25	23.0	22.28	21.94	22.18
		50	50	23.0	22.13	21.85	22.04
		100	0	23.0	22.15	22.00	21.92
	16QAM	1	0	23.0	21.94	22.45	22.09
		1	50	23.0	22.72	22.31	22.74
		1	99	23.0	22.07	22.11	22.53
		50	0	22.0	21.05	21.14	20.97
		50	25	22.0	21.28	20.94	21.22
		50	50	22.0	21.15	20.87	21.10
		100	0	22.0	21.17	21.00	20.97

Table 63: Conducted power measurement results of LTE Band IV(Main Antenna)

Main antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19957CH	20175CH	20393CH
1.4MHz	QPSK	1	0	22.8	22.27	22.23	22.72
		1	3	22.8	22.22	22.18	22.73
		1	5	22.8	22.03	22.00	22.62
		3	0	22.8	22.17	22.15	22.63
		3	2	22.8	22.20	22.14	22.66
		3	3	22.8	22.12	22.06	22.64
		6	0	22.0	21.11	21.06	21.54
	16QAM	1	0	22.0	21.12	21.21	21.84
		1	3	22.0	21.15	21.20	21.60
		1	5	22.0	21.09	21.03	21.71
		3	0	22.0	20.91	21.15	21.59
		3	2	22.0	20.89	21.14	21.65
		3	3	22.0	20.98	21.06	21.60
		6	0	21.0	20.01	20.17	20.59
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19965CH	20175CH	20385CH
3MHz	QPSK	1	0	22.8	21.90	22.13	22.57
		1	7	22.8	22.17	22.28	22.77
		1	14	22.8	21.94	21.89	22.47
		8	0	22.0	20.94	21.04	21.62
		8	4	22.0	21.07	21.09	21.60
		8	7	22.0	21.02	20.99	21.48
		15	0	22.0	21.02	21.07	21.50
	16QAM	1	0	22.0	20.74	21.00	21.51
		1	7	22.0	21.10	21.17	21.70
		1	14	22.0	20.81	20.83	21.36
		8	0	21.0	19.89	20.19	20.59
		8	4	21.0	20.06	20.15	20.57
		8	7	21.0	20.02	20.11	20.46
		15	0	21.0	19.92	20.12	20.45

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					19975CH	20175CH	20375CH
5MHz	QPSK	1	0	22.8	21.93	22.20	22.46
		1	13	22.8	22.36	22.30	22.79
		1	24	22.8	22.02	21.86	22.35
		12	0	22.0	21.05	21.16	21.59
		12	6	22.0	21.17	21.19	21.70
		12	13	22.0	21.03	20.96	21.50
		25	0	22.0	21.07	21.07	21.51
	16QAM	1	0	22.0	20.88	21.28	21.66
		1	13	22.0	21.36	21.48	21.95
		1	24	22.0	20.98	21.16	21.47
		12	0	21.0	20.01	20.21	20.56
		12	6	21.0	20.16	20.22	20.68
		12	13	21.0	20.07	19.98	20.46
		25	0	21.0	20.07	20.13	20.46
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20000CH	20175CH	20350CH
10MHz	QPSK	1	0	22.8	21.78	22.15	22.22
		1	25	22.8	22.44	22.32	22.66
		1	49	22.8	22.11	21.80	22.30
		25	0	22.0	21.12	21.21	21.24
		25	13	22.0	21.22	21.13	21.44
		25	25	22.0	21.21	21.04	21.40
		50	0	22.0	21.30	21.04	21.33
	16QAM	1	0	22.0	21.04	21.22	21.48
		1	25	22.0	21.70	21.44	21.83
		1	49	22.0	21.37	20.99	21.48
		25	0	21.0	20.16	20.24	20.27
		25	13	21.0	20.20	20.17	20.47
		25	25	21.0	20.14	20.08	20.41
		50	0	21.0	20.28	20.06	20.29

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20025CH	20175CH	20325CH
15MHz	QPSK	1	0	22.8	21.89	22.29	22.13
		1	38	22.8	22.57	22.28	22.68
		1	74	22.8	22.13	21.91	22.41
		36	0	22.0	21.21	21.22	21.33
		36	18	22.0	21.24	21.35	21.31
		36	39	22.0	21.34	21.16	21.40
		75	0	22.0	21.33	21.17	21.36
	16QAM	1	0	22.0	21.13	21.43	21.42
		1	38	22.0	21.91	21.58	21.96
		1	74	22.0	21.51	21.27	21.61
		36	0	21.0	20.19	20.24	20.31
		36	18	21.0	20.24	20.35	20.31
		36	39	21.0	20.26	20.13	20.36
		75	0	21.0	20.30	20.17	20.20
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20050CH	20175CH	20300CH
20MHz	QPSK	1	0	22.8	21.97	22.31	22.04
		1	50	22.8	22.63	22.29	22.55
		1	99	22.8	21.93	22.03	22.34
		50	0	22.0	21.25	21.34	21.22
		50	25	22.0	21.41	21.16	21.36
		50	50	22.0	21.37	21.13	21.24
		100	0	22.0	21.32	21.25	21.21
	16QAM	1	0	22.0	21.12	21.58	21.36
		1	50	22.0	21.83	21.59	21.89
		1	99	22.0	21.15	21.32	21.65
		50	0	21.0	20.19	20.34	20.20
		50	25	21.0	20.29	20.17	20.37
		50	50	21.0	20.30	20.10	20.15
		100	0	21.0	20.29	20.25	20.12

Table 64: Conducted power measurement results of LTE Band IV(Main Antenna)

7.1.22 Conducted power measurements of LTE Band V(Main Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20407CH	20525CH	20643CH
1.4MHz	QPSK	1	0	24.0	22.94	23.19	23.36
		1	3	24.0	23.15	23.23	23.30
		1	5	24.0	23.04	23.06	23.12
		3	0	24.0	22.99	23.12	23.27
		3	2	24.0	23.06	23.12	23.20
		3	3	24.0	23.20	23.06	23.09
		6	0	23.0	22.04	22.07	22.26
	16QAM	1	0	23.0	22.01	22.33	22.53
		1	3	23.0	22.24	22.53	22.35
		1	5	23.0	22.38	22.24	22.39
		3	0	23.0	22.12	22.23	22.38
		3	2	23.0	22.23	22.23	22.31
		3	3	23.0	22.22	22.17	22.23
		6	0	22.0	21.12	21.03	21.21
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20415CH	20525CH	20635CH
3MHz	QPSK	1	0	24.0	22.77	23.05	23.29
		1	7	24.0	23.31	23.27	23.50
		1	14	24.0	23.06	22.82	22.96
		8	0	23.0	22.07	22.05	22.44
		8	4	23.0	22.23	22.07	22.39
		8	7	23.0	22.15	21.92	22.23
		15	0	23.0	22.10	22.02	22.37
	16QAM	1	0	23.0	21.73	22.18	22.37
		1	7	23.0	22.29	22.46	22.64
		1	14	23.0	22.14	21.97	22.13
		8	0	22.0	21.00	21.09	21.33
		8	4	22.0	21.17	21.07	21.24
		8	7	22.0	21.10	20.96	21.08
		15	0	22.0	21.05	20.99	21.25

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20425CH	20525CH	20625CH
5MHz	QPSK	1	0	24.0	22.77	23.05	23.34
		1	13	24.0	23.42	23.30	23.56
		1	24	24.0	23.05	22.69	22.88
		12	0	23.0	22.11	22.05	22.43
		12	6	23.0	22.37	22.10	22.58
		12	13	23.0	22.19	21.84	22.17
		25	0	23.0	22.14	21.94	22.37
	16QAM	1	0	23.0	21.85	22.26	22.45
		1	13	23.0	22.45	22.50	22.75
		1	24	23.0	22.11	21.92	22.12
		12	0	22.0	20.99	21.03	21.36
		12	6	22.0	21.22	21.07	21.44
		12	13	22.0	21.10	20.80	21.07
		25	0	22.0	21.03	20.86	21.17
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20450CH	20525CH	20600CH
10MHz	QPSK	1	0	24.0	23.09	23.23	23.13
		1	25	24.0	23.49	23.33	23.57
		1	49	24.0	23.44	23.25	23.50
		25	0	23.0	22.08	22.06	22.05
		25	13	23.0	22.23	22.21	22.28
		25	25	23.0	22.05	21.86	22.26
		50	0	23.0	22.07	21.75	22.24
	16QAM	1	0	23.0	22.19	22.53	22.33
		1	25	23.0	22.61	22.51	22.86
		1	49	23.0	22.50	22.33	22.33
		25	0	22.0	21.64	21.39	21.50
		25	13	22.0	21.80	21.42	21.89
		25	25	22.0	21.41	21.18	21.79
		50	0	22.0	21.47	21.21	21.66

Table 65: Conducted power measurement results of LTE Band V(Main Antenna)

7.1.23 Conducted power measurements of LTE Band VII(Main Antenna)

Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	24.0	23.02	22.78	22.74
		1	13	24.0	23.32	22.91	22.86
		1	24	24.0	23.00	22.46	22.15
		12	0	23.0	22.34	22.15	22.36
		12	6	23.0	22.44	22.13	22.16
		12	13	23.0	22.24	21.89	21.64
		25	0	23.0	22.01	22.01	22.02
	16QAM	1	0	23.0	21.27	21.21	21.34
		1	13	23.0	22.05	21.28	21.21
		1	24	23.0	21.12	21.05	21.14
		12	0	22.0	21.37	20.55	20.72
		12	6	22.0	20.86	20.53	20.69
		12	13	22.0	20.62	20.35	20.38
		25	0	22.0	20.71	20.46	20.52
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	24.0	22.92	22.76	23.44
		1	25	24.0	23.41	22.90	22.95
		1	49	24.0	23.39	22.90	22.51
		25	0	23.0	22.13	22.06	22.11
		25	13	23.0	22.76	22.06	22.57
		25	25	23.0	22.18	21.87	22.02
		50	0	23.0	22.92	21.99	22.57
	16QAM	1	0	23.0	21.45	21.20	21.39
		1	25	23.0	21.65	21.33	21.61
		1	49	23.0	21.79	21.78	21.45
		25	0	22.0	20.62	20.48	20.65
		25	13	22.0	20.83	20.52	20.64
		25	25	22.0	20.68	20.32	20.56
		50	0	22.0	21.40	20.47	20.84

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	24.0	22.76	22.68	23.05
		1	38	24.0	23.53	22.96	23.31
		1	74	24.0	22.60	22.29	22.05
		36	0	23.0	22.53	22.17	22.07
		36	18	23.0	22.20	22.15	22.10
		36	39	23.0	21.97	21.89	22.28
		75	0	23.0	22.95	22.05	22.81
	16QAM	1	0	23.0	21.26	21.05	21.02
		1	38	23.0	21.79	21.27	21.52
		1	74	23.0	21.13	21.03	21.13
		36	0	22.0	21.07	20.66	20.59
		36	18	22.0	20.65	20.60	20.68
		36	39	22.0	20.44	20.40	20.59
		75	0	22.0	21.32	20.48	20.86
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	24.0	23.18	22.90	23.07
		1	50	24.0	23.07	22.86	23.59
		1	99	24.0	23.53	22.79	22.55
		50	0	23.0	22.75	22.33	22.04
		50	25	23.0	21.98	22.11	22.29
		50	50	23.0	22.06	21.95	22.57
		100	0	23.0	22.72	22.17	22.98
	16QAM	1	0	23.0	21.68	21.66	21.74
		1	50	23.0	21.56	21.34	21.88
		1	99	23.0	21.80	21.25	21.84
		50	0	22.0	20.93	20.76	20.48
		50	25	22.0	20.36	20.56	20.78
		50	50	22.0	20.51	20.39	20.65
		100	0	22.0	21.22	20.59	20.88

Table 66: Conducted power measurement results of LTE Band VII(Main Antenna)

Main antenna + WiFi Hotspot:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20775CH	21100CH	21425CH
5MHz	QPSK	1	0	21.0	20.40	20.15	20.44
		1	13	21.0	20.37	20.32	20.35
		1	24	21.0	20.16	19.85	20.31
		12	0	20.0	19.58	19.39	19.46
		12	6	20.0	19.57	19.36	19.48
		12	13	20.0	19.38	19.17	19.22
		25	0	20.0	19.43	19.30	19.40
	16QAM	1	0	20.0	18.80	18.66	18.83
		1	13	20.0	18.90	18.80	18.89
		1	24	20.0	18.35	18.31	18.38
		12	0	19.0	18.15	17.98	18.11
		12	6	19.0	18.15	17.92	18.12
		12	13	19.0	17.84	17.72	17.90
		25	0	19.0	17.98	17.80	18.01
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20800CH	21100CH	21400CH
10MHz	QPSK	1	0	21.0	20.41	20.19	20.33
		1	25	21.0	20.57	20.33	20.59
		1	49	21.0	20.55	20.84	20.51
		25	0	20.0	19.36	19.34	19.41
		25	13	20.0	19.49	19.32	19.40
		25	25	20.0	19.30	19.12	19.37
		50	0	20.0	19.35	19.26	19.45
	16QAM	1	0	20.0	18.65	18.73	18.61
		1	25	20.0	18.83	18.87	18.96
		1	49	20.0	18.73	18.89	18.88
		25	0	19.0	17.81	17.84	17.92
		25	13	19.0	17.83	17.89	17.89
		25	25	19.0	17.66	17.69	17.94
		50	0	19.0	18.60	17.82	18.14

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20825CH	21100CH	21375CH
15MHz	QPSK	1	0	21.0	20.19	20.05	19.89
		1	38	21.0	20.65	20.33	20.53
		1	74	21.0	19.94	19.56	19.69
		36	0	20.0	19.77	19.33	19.30
		36	18	20.0	19.39	19.33	19.38
		36	39	20.0	19.07	19.11	19.31
		75	0	20.0	19.45	19.23	19.38
	16QAM	1	0	20.0	18.56	18.50	18.33
		1	38	20.0	18.91	18.77	19.04
		1	74	20.0	18.35	18.01	18.34
		36	0	19.0	18.24	17.85	17.70
		36	18	19.0	17.76	17.81	17.86
		36	39	19.0	17.42	17.59	17.89
		75	0	19.0	18.36	17.72	18.11
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					20850CH	21100CH	21350CH
20MHz	QPSK	1	0	21.0	20.66	20.65	20.27
		1	50	21.0	20.42	20.34	20.58
		1	99	21.0	20.64	20.12	20.65
		50	0	20.0	19.56	19.58	19.18
		50	25	20.0	19.05	19.38	19.57
		50	50	20.0	19.26	19.18	19.44
		100	0	20.0	19.75	19.38	19.61
	16QAM	1	0	20.0	19.26	19.11	18.61
		1	50	20.0	18.81	18.86	18.94
		1	99	20.0	19.16	18.58	18.95
		50	0	19.0	17.97	18.09	17.54
		50	25	19.0	17.35	17.84	17.94
		50	50	19.0	17.52	17.64	17.94
		100	0	19.0	18.31	17.89	18.05

Table 67: Conducted power measurement results of LTE Band VII(Main Antenna)

7.1.24 Conducted power measurements of LTE Band XII(Main Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23107CH	23095CH	23173CH
1.4MHz	QPSK	1	0	24.0	22.41	22.70	22.44
		1	3	24.0	22.68	22.77	22.09
		1	5	24.0	22.65	22.78	22.09
		3	0	24.0	22.48	22.81	22.06
		3	2	24.0	22.65	22.79	22.05
		3	3	24.0	22.65	22.68	22.04
		6	0	23.0	21.70	21.79	21.15
	16QAM	1	0	23.0	21.70	22.02	21.18
		1	3	23.0	21.97	22.19	21.05
		1	5	23.0	21.95	22.03	21.03
		3	0	23.0	21.64	21.78	21.08
		3	2	23.0	21.76	21.82	21.14
		3	3	23.0	21.83	21.87	21.07
		6	0	22.0	20.72	20.96	20.21
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23025CH	23095CH	23165CH
3MHz	QPSK	1	0	24.0	22.25	22.54	23.06
		1	7	24.0	22.98	22.84	22.49
		1	14	24.0	22.73	22.64	22.05
		8	0	23.0	21.74	21.82	21.87
		8	4	23.0	21.98	21.85	21.30
		8	7	23.0	21.82	21.85	21.04
		15	0	23.0	21.73	21.83	21.34
	16QAM	1	0	23.0	21.54	21.71	22.04
		1	7	23.0	22.26	22.11	21.59
		1	14	23.0	21.95	21.75	21.09
		8	0	22.0	20.69	20.92	20.98
		8	4	22.0	21.03	21.01	20.44
		8	7	22.0	20.88	20.97	20.05
		15	0	22.0	20.80	20.92	20.40

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23035CH	23095CH	23155CH
5MHz	QPSK	1	0	24.0	22.24	22.46	22.84
		1	13	24.0	22.95	22.95	23.05
		1	24	24.0	22.15	22.09	22.15
		12	0	23.0	21.74	21.78	22.21
		12	6	23.0	21.87	21.94	22.02
		12	13	23.0	21.93	21.68	21.06
		25	0	23.0	21.76	21.74	21.75
	16QAM	1	0	23.0	21.52	21.86	22.27
		1	13	23.0	22.27	22.26	22.40
		1	24	23.0	21.03	21.07	21.11
		12	0	22.0	20.82	20.94	21.26
		12	6	22.0	20.98	21.08	21.11
		12	13	22.0	20.99	20.78	20.22
		25	0	22.0	20.81	20.82	20.82
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23060CH	23095CH	23130CH
10MHz	QPSK	1	0	24.0	22.11	22.33	22.47
		1	25	24.0	22.88	22.92	23.24
		1	49	24.0	23.04	23.20	22.07
		25	0	23.0	21.61	21.64	21.94
		25	13	23.0	21.74	21.78	22.13
		25	25	23.0	21.46	21.75	21.49
		50	0	23.0	21.63	21.66	22.06
	16QAM	1	0	23.0	21.56	21.79	21.68
		1	25	23.0	22.26	22.28	22.49
		1	49	23.0	22.50	22.46	21.11
		25	0	22.0	20.62	20.78	20.99
		25	13	22.0	20.82	20.86	21.10
		25	25	22.0	20.55	20.85	20.53
		50	0	22.0	20.70	20.79	21.10

Table 68: Conducted power measurement results of LTE Band XII(Main Antenna)

7.1.25 Conducted power measurements of LTE Band XVII(Main Antenna)

Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23755CH	23790CH	23825CH
5MHz	QPSK	1	0	24.0	22.93	23.17	23.25
		1	13	24.0	23.33	23.47	23.53
		1	24	24.0	22.86	23.18	22.02
		12	0	23.0	22.19	22.41	22.42
		12	6	23.0	22.15	22.69	22.52
		12	13	23.0	22.09	22.16	21.64
		25	0	23.0	22.09	22.57	22.06
	16QAM	1	0	23.0	22.26	22.36	22.56
		1	13	23.0	22.51	22.73	22.87
		1	24	23.0	22.25	22.34	21.08
		12	0	22.0	21.38	21.55	21.51
		12	6	22.0	21.37	21.85	21.54
		12	13	22.0	21.31	21.20	20.80
		25	0	22.0	21.29	21.65	21.13
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					23780CH	23790CH	23800CH
10MHz	QPSK	1	0	24.0	22.68	22.69	22.80
		1	25	24.0	23.38	23.11	23.16
		1	49	24.0	23.75	23.14	22.59
		25	0	23.0	22.00	22.03	22.33
		25	13	23.0	22.49	22.60	22.70
		25	25	23.0	22.31	22.22	22.00
		50	0	23.0	22.27	22.52	22.66
	16QAM	1	0	23.0	21.83	21.93	22.06
		1	25	23.0	22.61	22.68	22.84
		1	49	23.0	22.94	22.85	21.95
		25	0	22.0	21.16	21.21	21.48
		25	13	22.0	21.61	21.71	21.70
		25	25	22.0	21.37	21.27	21.10
		50	0	22.0	21.45	21.71	21.83

Table 69: Conducted power measurement results of LTE Band XVII(Main Antenna)

7.1.26 Conducted power measurements of LTE Band XXVI(Main Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26697CH	26865CH	27033CH
1.4MHz	QPSK	1	0	24.5	22.91	22.86	22.95
		1	3	24.5	22.93	22.81	22.68
		1	5	24.5	22.82	22.86	22.60
		3	0	24.5	22.70	22.65	22.53
		3	2	24.5	23.03	22.56	22.98
		3	3	24.5	23.07	22.72	22.59
		6	0	23.0	21.53	21.62	21.36
	16QAM	1	0	23.0	21.56	21.35	21.48
		1	3	23.0	21.34	21.60	21.56
		1	5	23.0	21.64	21.13	21.17
		3	0	22.0	21.73	21.57	21.59
		3	2	22.0	21.38	21.22	21.63
		3	3	22.0	21.78	21.46	21.44
		6	0	22.0	20.38	20.25	20.18
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26705CH	26865CH	27025CH
3MHz	QPSK	1	0	24.5	23.04	22.95	22.65
		1	7	24.5	23.04	23.11	22.63
		1	14	24.5	22.78	22.52	22.75
		8	0	23.0	21.64	21.65	21.83
		8	4	23.0	21.58	21.71	21.33
		8	7	23.0	21.54	21.63	21.37
		15	0	23.0	21.55	21.56	21.66
	16QAM	1	0	23.0	21.89	21.69	21.58
		1	7	23.0	21.64	21.52	21.32
		1	14	23.0	21.11	21.09	21.39
		8	0	22.0	20.44	20.50	20.27
		8	4	22.0	20.30	20.04	20.21
		8	7	22.0	20.17	20.23	20.39
		15	0	22.0	20.25	20.15	20.12

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26715CH	26865CH	27015CH
5MHz	QPSK	1	0	24.5	22.76	22.67	22.98
		1	13	24.5	22.98	22.97	22.93
		1	24	24.5	22.52	22.53	22.59
		12	0	23.0	21.90	22.08	21.87
		12	6	23.0	21.56	22.13	21.64
		12	13	23.0	21.62	21.66	21.85
		25	0	23.0	21.31	21.42	21.40
	16QAM	1	0	23.0	21.42	21.66	21.55
		1	13	23.0	21.44	21.60	22.08
		1	24	23.0	21.14	21.14	21.08
		12	0	22.0	20.25	20.11	20.34
		12	6	22.0	20.33	20.52	20.81
		12	13	22.0	20.33	20.13	20.55
		25	0	22.0	20.02	20.52	20.16
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26750CH	26865CH	26990CH
10MHz	QPSK	1	0	24.5	22.70	22.61	22.52
		1	25	24.5	22.74	22.83	23.03
		1	49	24.5	22.93	22.88	23.01
		25	0	23.0	21.60	21.59	21.51
		25	13	23.0	21.63	21.84	21.52
		25	25	23.0	21.38	21.46	21.51
		50	0	23.0	21.36	21.68	21.59
	16QAM	1	0	23.0	22.02	21.79	21.05
		1	25	23.0	22.44	22.54	21.71
		1	49	23.0	22.32	22.51	21.68
		25	0	22.0	20.12	20.03	20.11
		25	13	22.0	20.15	20.35	20.11
		25	25	22.0	20.43	20.37	20.37
		50	0	22.0	20.15	20.06	20.30

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					26775CH	26865CH	26965CH
15MHz	QPSK	1	0	24.5	23.58	23.37	23.32
		1	38	24.5	23.87	23.90	23.89
		1	74	24.5	23.41	23.08	22.71
		36	0	23.0	22.61	22.43	22.40
		36	18	23.0	22.61	22.76	22.52
		36	39	23.0	22.69	22.31	22.33
		75	0	23.0	22.47	22.29	22.40
	16QAM	1	0	23.0	22.38	21.90	22.28
		1	38	23.0	22.45	22.72	22.75
		1	74	23.0	22.16	21.84	22.28
		36	0	22.0	21.38	21.69	21.53
		36	18	22.0	21.60	21.83	21.78
		36	39	22.0	21.43	21.28	21.17
		75	0	22.0	21.23	21.20	21.66

Table 70: Conducted power measurement results of LTE Band XXVI(Main Antenna)

7.1.27 Conducted power measurements of LTE Band XXXVIII(Main Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37775CH	38000CH	38225CH
5MHz	QPSK	1	0	24.0	22.80	23.77	23.08
		1	13	24.0	22.85	23.63	23.02
		1	24	24.0	22.59	23.18	22.76
		12	0	23.0	21.88	22.54	22.24
		12	6	23.0	21.96	22.49	22.36
		12	13	23.0	21.88	22.32	22.25
		25	0	23.0	21.68	22.22	22.23
	16QAM	1	0	23.0	21.67	22.42	21.96
		1	13	23.0	21.65	22.21	21.91
		1	24	23.0	21.44	21.78	21.58
		12	0	22.0	20.93	21.59	21.34
		12	6	22.0	21.06	21.58	21.46
		12	13	22.0	20.98	21.38	21.34
		25	0	22.0	20.94	21.49	21.53
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37800CH	38000CH	38200CH
10MHz	QPSK	1	0	24.0	23.19	23.87	23.61
		1	25	24.0	23.47	23.91	23.43
		1	49	24.0	23.54	23.81	23.25
		25	0	23.0	21.78	22.45	22.23
		25	13	23.0	21.99	22.36	22.23
		25	25	23.0	22.00	22.30	22.23
		50	0	23.0	21.93	22.46	22.30
	16QAM	1	0	23.0	21.68	22.53	22.04
		1	25	23.0	21.73	22.40	21.94
		1	49	23.0	21.64	21.79	21.60
		25	0	22.0	20.86	21.55	21.39
		25	13	22.0	21.10	21.53	21.38
		25	25	22.0	21.12	21.40	21.38
		50	0	22.0	21.04	21.55	21.45

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37825CH	38000CH	38175CH
15MHz	QPSK	1	0	24.0	23.06	23.90	23.64
		1	38	24.0	23.58	23.94	23.50
		1	74	24.0	23.57	23.58	23.16
		36	0	23.0	21.80	22.31	22.12
		36	18	23.0	22.11	22.35	22.16
		36	39	23.0	22.03	22.22	22.19
		75	0	23.0	21.79	22.24	22.13
	16QAM	1	0	23.0	21.31	22.13	21.87
		1	38	23.0	21.84	22.26	21.73
		1	74	23.0	21.41	21.54	21.38
		36	0	22.0	20.98	21.35	21.25
		36	18	22.0	21.30	21.51	21.33
		36	39	22.0	21.15	21.30	21.37
		75	0	22.0	20.90	21.33	21.27
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37850CH	38000CH	38150CH
20MHz	QPSK	1	0	24.0	23.01	23.89	23.52
		1	50	24.0	23.54	23.95	23.28
		1	99	24.0	23.54	23.29	22.91
		50	0	23.0	21.96	22.43	22.20
		50	25	23.0	22.23	22.60	22.24
		50	50	23.0	22.25	22.27	22.30
		100	0	23.0	22.12	22.37	22.33
	16QAM	1	0	23.0	21.93	22.59	22.61
		1	50	23.0	22.45	22.65	22.24
		1	99	23.0	22.29	22.10	21.88
		50	0	22.0	21.08	21.53	21.42
		50	25	22.0	21.34	21.72	21.39
		50	50	22.0	21.35	21.41	21.46
		100	0	22.0	21.26	21.56	21.41

Table 71: Conducted power measurement results of LTE Band XXXVIII(Main Antenna)

Main antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37775CH	38000CH	38225CH
5MHz	QPSK	1	0	22.0	21.30	21.29	21.20
		1	13	22.0	21.45	21.43	21.40
		1	24	22.0	20.95	20.94	21.08
		12	0	21.0	20.26	20.25	20.36
		12	6	21.0	20.27	20.26	20.46
		12	13	21.0	20.11	20.10	20.35
		25	0	21.0	20.21	20.20	20.64
	16QAM	1	0	21.0	19.14	19.15	19.07
		1	13	21.0	19.32	19.41	19.38
		1	24	21.0	19.35	19.33	19.17
		12	0	20.0	19.07	19.09	18.82
		12	6	20.0	19.11	19.15	18.93
		12	13	20.0	19.18	19.22	18.83
		25	0	20.0	18.52	18.54	19.00
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37800CH	38000CH	38200CH
10MHz	QPSK	1	0	22.0	21.29	21.29	21.20
		1	25	22.0	21.64	21.61	21.42
		1	49	22.0	21.67	21.75	20.88
		25	0	21.0	20.26	20.30	20.19
		25	13	21.0	20.33	20.35	20.14
		25	25	21.0	20.35	20.37	20.07
		50	0	21.0	20.21	20.23	20.18
	16QAM	1	0	21.0	19.19	19.05	19.13
		1	25	21.0	19.49	19.16	19.31
		1	49	21.0	19.48	19.08	19.25
		25	0	20.0	18.54	18.50	18.76
		25	13	20.0	18.62	18.45	18.89
		25	25	20.0	18.66	18.38	18.87
		50	0	20.0	18.53	18.50	18.89

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37825CH	38000CH	38175CH
15MHz	QPSK	1	0	22.0	20.87	20.83	20.77
		1	38	22.0	21.38	21.35	21.22
		1	74	22.0	20.62	20.61	20.89
		36	0	21.0	20.05	20.03	20.09
		36	18	21.0	20.15	20.13	20.38
		36	39	21.0	19.96	19.94	20.35
		75	0	21.0	20.02	20.01	20.25
	16QAM	1	0	21.0	19.06	19.01	19.03
		1	38	21.0	19.17	19.24	19.07
		1	74	21.0	19.07	19.05	19.13
		36	0	20.0	18.37	18.36	18.50
		36	18	20.0	18.50	18.46	18.81
		36	39	20.0	18.32	18.32	18.88
		75	0	20.0	18.33	18.31	18.71
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					37850CH	38000CH	38150CH
20MHz	QPSK	1	0	22.0	21.29	21.27	21.23
		1	50	22.0	21.63	21.65	21.39
		1	99	22.0	21.11	21.09	21.18
		50	0	21.0	20.24	20.23	20.22
		50	25	21.0	20.38	20.38	20.36
		50	50	21.0	20.04	20.03	20.46
		100	0	21.0	20.23	20.23	20.37
	16QAM	1	0	21.0	19.21	19.15	19.03
		1	50	21.0	19.47	19.53	19.54
		1	99	21.0	19.12	19.09	19.36
		50	0	20.0	18.54	18.54	18.53
		50	25	20.0	18.70	18.70	18.73
		50	50	20.0	18.39	18.38	18.97
		100	0	20.0	18.51	18.53	18.80

Table 72: Conducted power measurement results of LTE Band XXXVIII(Main Antenna)

7.1.28 Conducted power measurements of LTE Band XLI(Main Antenna)
Full Power:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40265CH	40740CH	41215CH
5MHz	QPSK	1	0	24.0	23.54	23.58	23.32
		1	13	24.0	23.96	23.87	23.89
		1	24	24.0	23.22	23.59	23.11
		12	0	23.0	22.90	21.96	21.97
		12	6	23.0	22.64	22.02	22.23
		12	13	23.0	22.89	21.91	22.15
		25	0	23.0	22.95	22.42	21.71
	16QAM	1	0	23.0	22.68	22.59	22.20
		1	13	23.0	22.77	22.63	22.88
		1	24	23.0	22.73	22.27	22.33
		12	0	22.0	20.78	20.94	20.60
		12	6	22.0	20.45	20.49	20.82
		12	13	22.0	20.72	20.64	20.42
		25	0	22.0	20.60	20.44	20.74
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40290CH	40740CH	41190CH
10MHz	QPSK	1	0	24.0	23.37	23.34	23.27
		1	25	24.0	23.78	23.92	23.55
		1	49	24.0	23.59	23.24	23.18
		25	0	23.0	22.42	22.54	22.36
		25	13	23.0	22.62	22.71	22.36
		25	25	23.0	22.86	22.51	22.35
		50	0	23.0	22.57	22.83	22.13
	16QAM	1	0	23.0	22.28	22.75	22.31
		1	25	23.0	22.67	22.40	22.21
		1	49	23.0	22.37	22.57	22.47
		25	0	22.0	20.58	20.36	20.88
		25	13	22.0	20.67	20.55	20.33
		25	25	22.0	20.35	20.05	20.07
		50	0	22.0	20.12	20.13	20.01

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40315CH	40740CH	41165CH
15MHz	QPSK	1	0	24.0	23.08	23.48	23.36
		1	38	24.0	23.63	23.88	23.32
		1	74	24.0	23.01	23.08	23.46
		36	0	23.0	22.68	22.97	22.44
		36	18	23.0	22.68	22.95	22.64
		36	39	23.0	22.58	22.39	22.35
		75	0	23.0	22.52	22.50	22.50
	16QAM	1	0	23.0	22.45	22.66	22.22
		1	38	23.0	22.83	22.57	22.68
		1	74	23.0	21.83	22.52	22.20
		36	0	22.0	20.22	20.39	20.56
		36	18	22.0	20.48	20.24	20.29
		36	39	22.0	20.30	20.21	20.54
		75	0	22.0	20.26	20.41	20.36
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40340CH	40740CH	41140CH
20MHz	QPSK	1	0	24.0	23.32	23.60	23.19
		1	50	24.0	23.52	23.62	23.72
		1	99	24.0	23.08	23.58	23.04
		50	0	23.0	21.82	21.80	21.83
		50	25	23.0	21.81	21.79	21.81
		50	50	23.0	21.65	21.71	21.57
		100	0	23.0	22.00	21.85	21.56
	16QAM	1	0	23.0	21.53	21.76	21.69
		1	50	23.0	21.72	22.27	21.92
		1	99	23.0	21.27	22.01	21.40
		50	0	22.0	20.73	20.79	20.61
		50	25	22.0	20.76	20.66	21.04
		50	50	22.0	20.44	20.73	20.60
		100	0	22.0	20.67	20.72	20.59

Table 73: Conducted power measurement results of LTE Band XLI(Main Antenna)

Main antenna + WiFi Station:

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40265CH	40740CH	41215CH
5MHz	QPSK	1	0	22.0	21.42	21.61	21.81
		1	13	22.0	21.83	21.77	21.88
		1	24	22.0	21.22	21.46	21.77
		12	0	21.0	19.35	19.77	19.83
		12	6	21.0	19.13	19.96	20.06
		12	13	21.0	19.11	19.88	19.49
		25	0	21.0	19.39	19.83	19.85
	16QAM	1	0	20.0	18.67	19.30	19.82
		1	13	20.0	19.36	19.78	19.79
		1	24	20.0	18.83	19.18	19.75
		12	0	19.0	17.32	17.50	17.80
		12	6	19.0	17.13	17.85	17.74
		12	13	19.0	17.03	17.76	17.77
		25	0	19.0	17.17	17.83	17.42
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40290CH	40740CH	41190CH
10MHz	QPSK	1	0	22.0	21.30	21.66	21.83
		1	25	22.0	21.76	21.79	21.88
		1	49	22.0	21.21	21.49	21.54
		25	0	21.0	19.23	19.61	19.79
		25	13	21.0	19.15	19.84	20.03
		25	25	21.0	19.07	19.74	19.30
		50	0	21.0	19.23	19.71	19.80
	16QAM	1	0	20.0	18.67	19.16	19.80
		1	25	20.0	19.15	19.68	19.89
		1	49	20.0	18.70	18.98	19.56
		25	0	19.0	17.27	17.54	17.73
		25	13	19.0	17.08	17.61	17.64
		25	25	19.0	17.05	17.63	17.73
		50	0	19.0	17.04	17.65	17.45

Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40315CH	40740CH	41165CH
15MHz	QPSK	1	0	22.0	21.26	21.35	21.51
		1	38	22.0	21.75	21.75	21.64
		1	74	22.0	21.19	21.26	21.27
		36	0	21.0	19.20	19.38	19.51
		36	18	21.0	19.21	19.60	19.65
		36	39	21.0	19.10	19.38	19.06
		75	0	21.0	19.15	19.36	19.44
	16QAM	1	0	20.0	18.73	18.79	19.48
		1	38	20.0	19.15	19.44	19.65
		1	74	20.0	18.74	18.74	19.20
		36	0	19.0	17.20	17.29	17.44
		36	18	19.0	17.06	17.33	17.38
		36	39	19.0	17.11	17.28	17.34
		75	0	19.0	17.03	17.32	17.11
Bandwidth	Modulation	RB size	RB offset	Tune-up	Channel	Channel	Channel
					40340CH	40740CH	41140CH
20MHz	QPSK	1	0	22.0	21.34	21.63	21.83
		1	50	22.0	21.70	21.88	21.96
		1	99	22.0	21.18	21.75	21.59
		50	0	21.0	19.37	19.49	19.97
		50	25	21.0	19.17	19.50	19.91
		50	50	21.0	19.05	19.33	19.42
		100	0	21.0	19.21	19.30	19.71
	16QAM	1	0	20.0	18.90	19.44	19.82
		1	50	20.0	19.21	19.79	19.96
		1	99	20.0	18.84	19.35	19.46
		50	0	19.0	17.28	17.43	17.90
		50	25	19.0	17.13	17.29	17.82
		50	50	19.0	17.03	17.26	17.71
		100	0	19.0	17.05	17.23	17.57

Table 74: Conducted power measurement results of LTE Band XLI(Main Antenna)

7.1.29 Conducted power measurements of Downlink LTE CA

In this section, the following conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A.

Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.

Power test equipment: a R&S Radio Communication Tester CMW500 was used.

Initial Conditions						
Test Environment as specified in TS 36.508[7] subclause 4.1				NC[, TL/VL, TL/VH, TH/VL, TH/VH]		
Test Frequencies as specified in TS36.508 [7] subclause 4.3.1 for different CA bandwidth classes.				A: Mid range for PCC and SCC		
Test CC Combination setting (N_{RB_agg}) as specified in subclause 5.4.2A.1 for the CA Configuration				Lowest N_{RB_agg} Highest N_{RB_agg}		
Test Parameters for CA Configurations						
CA Configuration / N_{RB_agg}		DL Allocation	CC MOD	UL Allocation		
PCC N_{RB}	SCCs N_{RB}	PCC & SCC RB allocation		N_{RB_alloc}	PCC RB allocations (L_{CRB} @ RB_{start})	
6	25	N/A for this test	QPSK	5	P_5@0	-
15	25		QPSK	4	P_4@0	-
25	50		QPSK	8	P_8@0	-
50	75		QPSK	12	P_12@0	-
75	100		QPSK	16	P_16@0	-
100	75		QPSK	18	P_18@0	-
Note 1: CA Configuration Test CC Combination settings are checked separately for each CA Configuration, which applicable aggregated channel bandwidths are specified in Table 5.4.2A.1-1						



Table 75: Conducted power measurement setup of LTE CA per 3GPP TS 36.521-1 V12.6.0

A) The conducted power measurement results of downlink LTE CA Conduted Power are as below(Main antenna):

DL LTE CA Class	PCC								SCC			Power	
	PCC Band	PCC Bandwidth (MHz)	PCC UL RB size	PCC UL RB offset	PCC DL RB size	PCC DL RB offset	PCC UL Channel	PCC DL Channel	SCC Band	SCC Bandwidth (MHz)	SCC DL Channel	Rel 8 LTE Tx Power(dBm)	Rel 10 DL LTE CA Tx Power(dBm)
CA_7C	7	20	1	50	100	0	21350	3350	7	20	3152	23.59	23.62
CA_38C	38	15	1	0	75	0	38175	38175	38	15	38025	23.64	23.44
CA_1A-5A	5	10	1	25	50	0	20600	2600	1	10	550	23.57	23.67
CA_2A-17A	2	10	1	49	50	0	18900	900	17	10	5790	23.29	23.18
	17	10	1	49	50	0	23790	5790	2	10	900	23.14	23.52
CA_3A-5A	5	10	1	25	50	0	20600	2600	3	10	1900	23.57	23.54
CA_3A-7A	7	10	1	0	50	0	21400	3400	3	10	1900	23.44	23.06
CA_4A-17A	4	10	1	25	50	0	20175	2175	17	10	5790	23.24	23.05
CA_7A-8A	7	10	1	0	50	0	21400	3400	8	10	3750	23.44	23.52
CA_7A-20A	7	10	1	0	50	0	21400	3400	20	10	6400	23.44	23.55
CA_7A-28A	7	10	1	0	50	0	21400	3400	28	10	9616	23.44	23.38

Note: Testing is not required in bands or modes not intended/allowed for US operation.

B) The conducted power measurement results of downlink LTE CA Conduted Power are as below (Second antenna):

DL LTE CA Class	PCC								SCC			Power	
	PCC Band	PCC Bandwidth (MHz)	PCC UL RB size	PCC UL RB offset	PCC DL RB size	PCC DL RB offset	PCC UL Channel	PCC DL Channel	SCC Band	SCC Bandwidth (MHz)	SCC DL Channel	Rel 8 LTE Tx Power(dBm)	Rel 10 DL LTE CA Tx Power(dBm)
CA_7C	7	20	1	50	100	0	21350	3350	7	20	3152	23.23	23.31
CA_38C	38	15	1	0	75	0	38175	38175	38	15	38025	23.66	23.60
CA_1A-5A	5	10	1	25	50	0	20600	2600	1	10	550	23.47	23.44
CA_2A-17A	2	10	1	25	50	0	18900	900	17	10	5790	23.25	23.33
	17	10	1	49	50	0	23790	5790	2	10	900	23.68	23.52
CA_3A-5A	5	10	1	25	50	0	20600	2600	3	10	1900	23.47	23.62
CA_3A-7A	7	10	1	0	50	0	21400	3400	3	10	1900	23.18	23.06
CA_4A-17A	4	10	1	25	50	0	20175	2175	17	10	5790	23.37	23.45
CA_7A-8A	7	10	1	0	50	0	21400	3400	8	10	3750	23.18	23.33
CA_7A-20A	7	10	1	0	50	0	21400	3400	20	10	6400	23.18	23.06
CA_7A-28A	7	10	1	0	50	0	21400	3400	28	10	9616	23.18	23.11

Note: Testing is not required in bands or modes not intended/allowed for US operation.

7.1.30 Conducted power measurements of WiFi 2.4G

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	17.5	15.65	No
	6	2437		17.5	15.69	Yes
	11	2462		17.5	16.21	Yes
802.11g	1	2412	6	15.5	Not Required	No
	6	2437		15.5	Not Required	No
	11	2462		15.5	Not Required	No
802.11n 20M	1	2412	6.5	15.0	Not Required	No
	6	2437		15.0	Not Required	No
	11	2462		15.0	Not Required	No
802.11n 40M	3	2422	13.5	14.0	Not Required	No
	6	2437		14.0	Not Required	No
	9	2452		14.0	Not Required	No

Table 76: Conducted power measurement results of WiFi 2.4G(Full power level).

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
802.11b	1	2412	1	15.0	13.54	No
	6	2437		15.0	13.63	Yes
	11	2462		15.0	14.08	Yes
802.11g	1	2412	6	13.0	Not Required	No
	6	2437		13.0	Not Required	No
	11	2462		13.0	Not Required	No
802.11n 20M	1	2412	6.5	12.5	Not Required	No
	6	2437		12.5	Not Required	No
	11	2462		12.5	Not Required	No
802.11n 40M	3	2422	13.5	11.5	Not Required	No
	6	2437		11.5	Not Required	No
	9	2452		11.5	Not Required	No

Table 77: Conducted power measurement results of WiFi 2.4G(2G&3G&4G antenna + WiFi station simultaneous transmission)

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

7.1.31 Conducted power measurements of WiFi 5G

Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.2G	802.11a	CH 36	5180	6M	16.0	14.91	Yes
		CH 40	5200		16.0	14.88	Yes
		CH 44	5220		16.0	14.70	No
		CH 48	5240		16.0	14.82	No
	802.11n 20M	CH 36	5180	6.5M	14.0	Not Required	No
		CH 40	5200		14.0	Not Required	No
		CH 44	5220		14.0	Not Required	No
		CH 48	5240		14.0	Not Required	No
	802.11n 40M	CH 38	5190	13.5M	14.0	Not Required	No
		CH 46	5230		14.0	Not Required	No
	802.11ac 20M	CH 36	5180	6.5M	14.0	Not Required	No
		CH 40	5200		14.0	Not Required	No
		CH 44	5220		14.0	Not Required	No
		CH 48	5240		14.0	Not Required	No
	802.11ac 40M	CH 38	5190	13.5M	14.0	Not Required	No
		CH 46	5230		14.0	Not Required	No
802.11ac 80M	CH 42	5210	29.3M	13.0	Not Required	No	
Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.3	802.11a	CH 52	5260	6M	16.0	14.58	Yes
		CH 56	5280		16.0	14.43	Yes
		CH 60	5300		16.0	14.16	Yes
		CH 64	5320		16.0	14.24	Yes
	802.11n 20M	CH 52	5260	6.5M	14.0	Not Required	No
		CH 56	5280		14.0	Not Required	No
		CH 60	5300		14.0	Not Required	No
		CH 64	5320		14.0	Not Required	No
	802.11n 40M	CH 54	5270	13.5M	14.0	Not Required	No
		CH 62	5310		14.0	Not Required	No
	802.11ac 20M	CH 52	5260	6.5M	14.0	Not Required	No
		CH 56	5280		14.0	Not Required	No
		CH 60	5300		14.0	Not Required	No
		CH 64	5320		14.0	Not Required	No
	802.11ac 40M	CH 54	5270	13.5M	14.0	Not Required	No
		CH 62	5310		14.0	Not Required	No
802.11ac 80M	CH 58	5290	29.3M	13.0	Not Required	No	

Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.5	802.11a	CH 100	5500	6M	14.0	Not Required	No
		CH 104	5520		14.0	Not Required	No
		CH 108	5540		14.0	Not Required	No
		CH 112	5560		14.0	Not Required	No
		CH 116	5580		14.0	Not Required	No
		CH 120	5600		14.0	Not Required	No
		CH 124	5620		14.0	Not Required	No
		CH 128	5640		14.0	Not Required	No
		CH 132	5660		14.0	Not Required	No
		CH 136	5680		14.0	Not Required	No
		CH 140	5700		14.0	Not Required	No
		CH 144	5720		14.0	Not Required	No
	802.11n 20M	CH 100	5500	6.5M	14.0	Not Required	No
		CH 104	5520		14.0	Not Required	No
		CH 108	5540		14.0	Not Required	No
		CH 112	5560		14.0	Not Required	No
		CH 116	5580		14.0	Not Required	No
		CH 120	5600		14.0	Not Required	No
		CH 124	5620		14.0	Not Required	No
		CH 128	5640		14.0	Not Required	No
		CH 132	5660		14.0	Not Required	No
		CH 136	5680		14.0	Not Required	No
		CH 140	5700		14.0	Not Required	No
		CH 144	5720		14.0	Not Required	No
	802.11n 40M	CH 102	5510	13.5M	14.0	12.78	Yes
		CH 110	5550		14.0	12.93	Yes
		CH 118	5590		14.0	12.75	No
		CH 126	5630		14.0	12.76	No
		CH 134	5670		14.0	12.53	No
		CH 142	5710		14.0	12.45	No
	802.11ac 20M	CH 100	5500	6.5M	14.0	Not Required	No
		CH 104	5520		14.0	Not Required	No
		CH 108	5540		14.0	Not Required	No
		CH 112	5560		14.0	Not Required	No
		CH 116	5580		14.0	Not Required	No
		CH 120	5600		14.0	Not Required	No
CH 124		5620	14.0		Not Required	No	
CH 128		5640	14.0		Not Required	No	
CH 132		5660	14.0		Not Required	No	
CH 136		5680	14.0		Not Required	No	
CH 140		5700	14.0		Not Required	No	
CH 144		5720	14.0		Not Required	No	

Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.5	802.11ac 40M	CH 102	5510	13.5M	14.0	Not Required	No
		CH 110	5550		14.0	Not Required	No
		CH 118	5590		14.0	Not Required	No
		CH 126	5630		14.0	Not Required	No
		CH 134	5670		14.0	Not Required	No
		CH 142	5710		14.0	Not Required	No
	802.11ac 80M	CH 106	5530	29.3M	13.0	Not Required	No
		CH 122	5610		13.0	Not Required	No
		CH 138	5690		13.0	Not Required	No
Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.8	802.11a	CH 149	5745	6M	14.5	14.39	Yes
		CH 153	5765		14.5	14.38	No
		CH 157	5785		14.5	14.41	Yes
		CH 161	5805		14.5	14.36	No
		CH 165	5825		14.5	14.34	No
	802.11n 20M	CH 149	5745	6.5M	14.0	Not Required	No
		CH 153	5765		14.0	Not Required	No
		CH 157	5785		14.0	Not Required	No
		CH 161	5805		14.0	Not Required	No
		CH 165	5825		14.0	Not Required	No
	802.11n 40M	CH 151	5755	13.5M	14.0	Not Required	No
		CH 159	5795		14.0	Not Required	No
	802.11ac 20M	CH 149	5745	6.5M	14.0	Not Required	No
		CH 153	5765		14.0	Not Required	No
		CH 157	5785		14.0	Not Required	No
		CH 161	5805		14.0	Not Required	No
		CH 165	5825		14.0	Not Required	No
	802.11ac 40M	CH 151	5755	13.5M	14.0	Not Required	No
		CH 159	5795		14.0	Not Required	No
	802.11ac 80M	CH 155	5775	29.3M	13.0	Not Required	No

Table 78: Conducted power measurement results of WiFi 5G(Full power level).

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.2	802.11a	CH 36	5180	6M	13.5	Not Required	No
		CH 40	5200		13.5	Not Required	No
		CH 44	5220		13.5	Not Required	No
		CH 48	5240		13.5	Not Required	No
	802.11n 20M	CH 36	5180	6.5M	11.5	Not Required	No
		CH 40	5200		11.5	Not Required	No
		CH 44	5220		11.5	Not Required	No
		CH 48	5240		11.5	Not Required	No
	802.11n 40M	CH 38	5190	13.5M	11.5	Not Required	No
		CH 46	5230		11.5	Not Required	No
	802.11ac 20M	CH 36	5180	6.5M	11.5	Not Required	No
		CH 40	5200		11.5	Not Required	No
		CH 44	5220		11.5	Not Required	No
		CH 48	5240		11.5	Not Required	No
802.11ac 40M	CH 38	5190	13.5M	11.5	Not Required	No	
	CH 46	5230		11.5	Not Required	No	
802.11ac 80M	CH 42	5210	29.3M	10.5	Not Required	No	
Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.3	802.11a	CH 52	5260	6M	13.5	11.95	Yes
		CH 56	5280		13.5	11.73	No
		CH 60	5300		13.5	11.55	No
		CH 64	5320		13.5	11.66	No
	802.11n 20M	CH 52	5260	6.5M	11.5	Not Required	No
		CH 56	5280		11.5	Not Required	No
		CH 60	5300		11.5	Not Required	No
		CH 64	5320		11.5	Not Required	No
	802.11n 40M	CH 54	5270	13.5M	11.5	Not Required	No
		CH 62	5310		11.5	Not Required	No
	802.11ac 20M	CH 52	5260	6.5M	11.5	Not Required	No
		CH 56	5280		11.5	Not Required	No
		CH 60	5300		11.5	Not Required	No
		CH 64	5320		11.5	Not Required	No
802.11ac 40M	CH 54	5270	13.5M	11.5	Not Required	No	
	CH 62	5310		11.5	Not Required	No	
802.11ac 80M	CH 58	5290	29.3M	10.5	Not Required	No	

Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)		
5.5	802.11a	CH 100	5500	6M	11.5	Not Required	No		
		CH 104	5520		11.5	Not Required	No		
		CH 108	5540		11.5	Not Required	No		
		CH 112	5560		11.5	Not Required	No		
		CH 116	5580		11.5	Not Required	No		
		CH 120	5600		11.5	Not Required	No		
		CH 124	5620		11.5	Not Required	No		
		CH 128	5640		11.5	Not Required	No		
		CH 132	5660		11.5	Not Required	No		
		CH 136	5680		11.5	Not Required	No		
		CH 140	5700		11.5	Not Required	No		
		CH 144	5720		11.5	Not Required	No		
		802.11n 20M	CH 100		5500	6.5M	11.5	Not Required	No
			CH 104		5520		11.5	Not Required	No
	CH 108		5540	11.5	Not Required		No		
	CH 112		5560	11.5	Not Required		No		
	CH 116		5580	11.5	Not Required		No		
	CH 120		5600	11.5	Not Required		No		
	CH 124		5620	11.5	Not Required		No		
	CH 128		5640	11.5	Not Required		No		
	CH 132		5660	11.5	Not Required		No		
	CH 136		5680	11.5	Not Required		No		
	CH 140		5700	11.5	Not Required		No		
	CH 144		5720	11.5	Not Required		No		
	802.11n 40M		CH 102	5510	13.5M		11.5	10.32	No
			CH 110	5550			11.5	10.58	Yes
		CH 118	5590	11.5		10.26	No		
		CH 126	5630	11.5		10.15	No		
		CH 134	5670	11.5		10.04	No		
		CH 142	5710	11.5		10.09	No		
	802.11ac 20M	CH 100	5500	6.5M	11.5	Not Required	No		
		CH 104	5520		11.5	Not Required	No		
		CH 108	5540		11.5	Not Required	No		
		CH 112	5560		11.5	Not Required	No		
		CH 116	5580		11.5	Not Required	No		
		CH 120	5600		11.5	Not Required	No		
		CH 124	5620		11.5	Not Required	No		
		CH 128	5640		11.5	Not Required	No		
		CH 132	5660		11.5	Not Required	No		
		CH 136	5680		11.5	Not Required	No		
		CH 140	5700		11.5	Not Required	No		
		CH 144	5720		11.5	Not Required	No		

Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.5	802.11ac 40M	CH 102	5510	13.5M	11.5	Not Required	No
		CH 110	5550		11.5	Not Required	No
		CH 118	5590		11.5	Not Required	No
		CH 126	5630		11.5	Not Required	No
		CH 134	5670		11.5	Not Required	No
		CH 142	5710		11.5	Not Required	No
	802.11ac 80M	CH 106	5530	29.3M	10.5	Not Required	No
		CH 122	5610		10.5	Not Required	No
		CH 138	5690		10.5	Not Required	No
Band (GHz)	Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tune-up	Average Power (dBm)	SAR Test (Yes/No)
5.8	802.11a	CH 149	5745	6M	12.0	11.91	No
		CH 153	5765		12.0	11.84	No
		CH 157	5785		12.0	11.95	Yes
		CH 161	5805		12.0	11.89	No
		CH 165	5825		12.0	11.92	No
	802.11n 20M	CH 149	5745	6.5M	11.5	Not Required	No
		CH 153	5765		11.5	Not Required	No
		CH 157	5785		11.5	Not Required	No
		CH 161	5805		11.5	Not Required	No
		CH 165	5825		11.5	Not Required	No
	802.11n 40M	CH 151	5755	13.5M	11.5	Not Required	No
		CH 159	5795		11.5	Not Required	No
	802.11ac 20M	CH 149	5745	6.5M	11.5	Not Required	No
		CH 153	5765		11.5	Not Required	No
		CH 157	5785		11.5	Not Required	No
		CH 161	5805		11.5	Not Required	No
		CH 165	5825		11.5	Not Required	No
	802.11ac 40M	CH 151	5755	13.5M	11.5	Not Required	No
		CH 159	5795		11.5	Not Required	No
	802.11ac 80M	CH 155	5775	29.3M	10.5	Not Required	No

Table 79: Conducted power measurement results of WiFi 5G(2G&3G&4G antenna + WiFi station simultaneous transmission)

Note: 1) The Average conducted power of WiFi is measured with RMS detector.

7.1.32 Conducted power measurements of BT

The output power of BT antenna is as following:

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	39CH	78CH
DH5	13.0	9.33	11.39	8.65
2DH5	13.0	6.00	8.30	6.05
3DH5	13.0	6.03	7.49	6.31

BT 2450	Tune-up	Average Conducted Power (dBm)		
		0CH	19CH	39CH
BT 4.0	13.0	5.67	6.78	4.91

Table 80: Conducted power measurement results of BT.

Note: The conducted power of BT is measured with RMS detector.

7.2 SAR measurement Results

General Notes:

- 1) Per KDB447498 D01, all SAR measurement results are scaled to the maximum tune-up tolerance limit to demonstrate SAR compliance.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.When the maximum output power variation across the required test channels is $> \frac{1}{2}\text{ dB}$, instead of the middle channel, the highest output power channel must be used.
- 3) Per KDB865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$; if the deviation among the repeated measurement is $\leq 20\%$, and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
- 4) Per KDB941225 D06, the DUT Dimension is bigger than 9 cm x 5 cm, so 10mm is chosen as the test separation distance for Hotspot mode. When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.
- 5) Per KDB648474 D04, SAR is evaluated without a headset connected to the device. When the standalone reported body-worn SAR is $\leq 1.2\text{ W/kg}$, no additional SAR evaluations using a headset are required.
- 6) Per KDB865664 D02, SAR plot is only required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination; Plots are also required when the measured SAR is $> 1.5\text{ W/kg}$, or $> 7.0\text{ W/kg}$ for occupational exposure. The published RF exposure KDB procedures may require additional plots; for example, to support SAR to peak location separation ratio test exclusion and/or volume scan post-processing(Refer to appendix B for detailed SAR plots).
- 7) Additional SAR tests in simultaneous transmission fixed power reduction scenario are also tested in some frequency bands and required test positions for the SAR worst case, which are only used to ensure simultaneous transmission SAR test exclusion. The standalone SAR compliance still uses the SAR results tested at the maximum output power level.
- 8) Per KDB 648474D04, for handsets with additional batteries, the highest reported SAR for each wireless technology, frequency band, operating mode and applicable exposure condition (head, body-worn accessory, hotspot mode, etc.) must be repeated with the specific accessory attached. In addition, for test cases where the measured SAR for a handset is greater than 1.2 W/kg , these tests should also be repeated with the additional batteries.
- 9) Per KDB 648474 D04, Phones with built-in NFC functions do not require separate SAR testing and can generally be tested according to the SAR measurement procedures normally required for the phone. Influences of the hardware introduced by the built-in NFC functions are inherently considered through testing of the other transmitters that require SAR.

GSM Notes:

- 1) Per KDB941225 D01, SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the

applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

2) Per KDB648474 D04, the device does not support DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.

UMTS Notes:

1) Per KDB941225 D01, when the maximum output power and tune-up tolerance specified for production units in a Second mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of Second to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the Second mode.

LTE Notes:

1) The LTE test configurations are determined according to KDB941225 D05. The general test procedures used for SAR testing can be found in Section 6.5.

2) A-MPR was disabled for all SAR test by setting NS_01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI)

3) According to KDB 941225 D05, for Time-Division Duplex (TDD) systems, SAR is tested using a fixed periodic duty factor according to the highest transmission duty factor (63.33%) implemented for the device and supported by the defined 3GPP LTE TDD configurations.

WiFi Notes:

Per KDB248227D01:

1) When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test position is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured. For all positions/configurations tested using the initial test position and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

2) The highest SAR measured for the initial test position or initial test configuration should be used to determine SAR test exclusion according to the sum of 1-g SAR and SAR peak to location ratio provisions in KDB 447498. In addition, a test lab may also choose to perform standalone SAR measurements for test positions and 802.11 configurations that are not required by the initial test position or initial test configuration procedures and apply the results to determine simultaneous transmission SAR test exclusion, according to sum of 1-g and SAR peak to location ratio requirements to reduce the number of simultaneous transmission SAR measurements.

3) WiFi 5G hotspot is only supported for U-NII-1 and U-NII-3, therefore U-NII-2A and U-NII-2C SAR were not evaluated for hotspot condition.

4) For WiFi 5G U-NII-1 and U-NII-2A bands, as the different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest *reported* SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. As the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

7.2.1 SAR measurement Result of GSM850(Second Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	190/836.6	GSM	0.693	0.374	-0.010	32.56	33.00	0.767	/
Left Hand Tilted 15°	190/836.6	GSM	0.636	0.329	-0.020	32.56	33.00	0.704	/
Right Hand Touched	190/836.6	GSM	1.210	0.631	-0.060	32.56	33.00	1.339	/
Right Hand Touched	128/824.2	GSM	0.942	0.487	-0.120	32.40	33.00	1.082	/
Right Hand Touched	251/848.8	GSM	1.300	0.684	-0.040	32.55	33.00	1.442	/
Right Hand Touched-Repeated	251/848.8	GSM	1.310	0.681	0.020	32.55	33.00	1.453	/
Right Hand Tilted 15°	190/836.6	GSM	0.919	0.458	-0.030	32.56	33.00	1.017	/
Right Hand Tilted 15°	128/824.2	GSM	0.786	0.377	-0.070	32.40	33.00	0.902	/
Right Hand Tilted 15°	251/848.8	GSM	1.180	0.568	-0.010	32.55	33.00	1.309	/
Tested at the worst position with battery 2#									
Right Hand Touched	251/848.8	GSM	1.180	0.608	-0.050	32.55	33.00	1.309	/
Right Hand Touched	190/836.6	GSM	1.150	0.590	0.010	32.56	33.00	1.273	/
Tested at the worst position with battery 3#									
Right Hand Touched	251/848.8	GSM	1.140	0.585	-0.170	32.55	33.00	1.264	/
Right Hand Touched	190/836.6	GSM	1.170	0.602	0.050	32.56	33.00	1.295	/
Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
Right Hand Touched	190/836.6	GSM	0.705	0.361	0.020	29.39	30.00	0.811	/
Right Hand Touched	128/824.2	GSM	0.474	0.307	-0.050	29.09	30.00	0.584	/
Right Hand Touched	251/848.8	GSM	0.764	0.393	0.010	29.41	30.00	0.875	/
Right Hand Tilted 15°	190/836.6	GSM	0.626	0.294	0.050	29.39	30.00	0.720	/

Table 81: Head SAR test results of GSM850

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	190/836.6	GSM	0.156	0.093	-0.090	32.56	33.00	0.173	/
Back Side	190/836.6	GSM	0.144	0.086	-0.080	32.56	33.00	0.159	/
Tested at the worst position with battery 2#									
Front Side	190/836.6	GSM	0.118	0.077	-0.070	32.56	33.00	0.131	/
Tested at the worst position with battery 3#									
Front Side	190/836.6	GSM	0.187	0.112	0.030	32.56	33.00	0.207	/

Table 82: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	190/836.6	GPRS 2TS	0.341	0.191	-0.010	29.94	31.00	0.435	/
Back Side	190/836.6	GPRS 2TS	0.393	0.219	0.090	29.94	31.00	0.502	/
Left Side	190/836.6	GPRS 2TS	0.252	0.169	0.060	29.94	31.00	0.322	/
Top Side	190/836.6	GPRS 2TS	0.270	0.149	-0.030	29.94	31.00	0.345	/
Tested at the worst position with battery 2#									
Back Side	190/836.6	GPRS 2TS	0.487	0.268	0.070	29.94	31.00	0.622	/
Tested at the worst position with battery 3#									
Back Side	190/836.6	GPRS 2TS	0.514	0.281	0.040	29.94	31.00	0.656	/

Table 83: Hotspot SAR test results of GSM850

7.2.2 SAR measurement Result of GSM1900(Second Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	661/1880	GSM	0.336	0.208	0.080	29.89	30.20	0.361	/
Left Hand Tilted 15°	661/1880	GSM	0.276	0.165	0.010	29.89	30.20	0.296	/
Right Hand Touched	661/1880	GSM	0.999	0.547	0.020	29.89	30.20	1.073	/
Right Hand Touched	512/1850.2	GSM	1.030	0.589	0.160	30.12	30.20	1.049	/
Right Hand Touched	810/1909.8	GSM	1.130	0.612	-0.160	30.08	30.20	1.162	/
Right Hand Tilted 15°	661/1880	GSM	0.622	0.349	0.080	29.89	30.20	0.668	/
Tested at the worst position with battery 2#									
Right Hand Touched	810/1909.8	GSM	1.200	0.659	0.040	30.08	30.20	1.234	/
Right Hand Touched-Repeated	810/1909.8	GSM	1.210	0.660	0.010	30.08	30.20	1.244	/
Tested at the worst position with battery 3#									
Right Hand Touched	810/1909.8	GSM	1.160	0.624	-0.040	30.08	30.20	1.192	/

Table 84: Head SAR test results of GSM1900

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	661/1880	GSM	0.098	0.064	0.130	29.89	30.20	0.105	/
Back Side	661/1880	GSM	0.113	0.074	0.030	29.89	30.20	0.121	/
Tested at the worst position with battery 2#									
Back Side	661/1880	GSM	0.086	0.052	0.150	29.89	30.20	0.092	/
Tested at the worst position with battery 3#									
Back Side	661/1880	GSM	0.085	0.052	-0.080	29.89	30.20	0.092	/

Table 85: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	661/1880	GPRS 2TS	0.132	0.081	0.150	25.49	26.70	0.174	/
Back Side	661/1880	GPRS 2TS	0.185	0.117	-0.150	25.49	26.70	0.244	/
Left Side	661/1880	GPRS 2TS	0.169	0.097	-0.030	25.49	26.70	0.223	/
Top Side	661/1880	GPRS 2TS	0.126	0.064	0.050	25.49	26.70	0.166	/
Tested at the worst position with battery 2#									
Back Side	661/1880	GPRS 2TS	0.201	0.126	0.040	25.49	26.70	0.266	/
Tested at the worst position with battery 3#									
Back Side	661/1880	GPRS 2TS	0.180	0.111	-0.060	25.49	26.70	0.238	/

Table 86: Hotspot SAR test results of GSM1900

7.2.3 SAR measurement Result of UMTS Band II(Second Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	9400/1880	RMC	0.342	0.218	0.040	23.78	24.00	0.360	/
Left Hand Tilted 15°	9400/1880	RMC	0.251	0.157	0.030	23.78	24.00	0.264	/
Right Hand Touched	9400/1880	RMC	1.110	0.618	0.000	23.78	24.00	1.168	/
Right Hand Touched	9262/1852.4	RMC	0.991	0.558	0.060	23.82	24.00	1.033	/
Right Hand Touched	9538/1907.6	RMC	1.200	0.665	0.080	23.81	24.00	1.254	/
Right Hand Tilted 15°	9400/1880	RMC	0.715	0.386	0.030	23.78	24.00	0.752	/
Tested at the worst position with battery 2#									
Right Hand Touched	9538/1907.6	RMC	1.240	0.687	0.060	23.81	24.00	1.295	/
Right Hand Touched-Repeated	9538/1907.6	RMC	1.120	0.628	-0.010	23.81	24.00	1.170	/
Tested at the worst position with battery 3#									
Right Hand Touched	9538/1907.6	RMC	1.220	0.666	0.080	23.81	24.00	1.275	/
Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
Right Hand Touched	9400/1880	RMC	0.580	0.322	0.110	18.73	19.00	0.617	/

Table 87: Head SAR test results of UMTS Band II

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	9400/1880	RMC	0.076	0.050	0.180	23.78	24.00	0.080	/
Back Side	9400/1880	RMC	0.088	0.057	0.010	23.78	24.00	0.092	/
Tested at the worst position with battery 2#									
Back Side	9400/1880	RMC	0.094	0.060	0.010	23.78	24.00	0.098	/
Tested at the worst position with battery 3#									
Back Side	9400/1880	RMC	0.085	0.052	-0.120	23.78	24.00	0.089	/

Table 88: Body-Worn SAR test results of UMTS Band II

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	9400/1880	RMC	0.116	0.076	0.180	18.73	19.00	0.123	/
Back Side	9400/1880	RMC	0.170	0.108	0.070	18.73	19.00	0.181	/
Left Side	9400/1880	RMC	0.183	0.109	0.110	18.73	19.00	0.195	/
Bottom Side	9400/1880	RMC	0.137	0.071	0.140	18.73	19.00	0.146	/
Tested at the worst position with battery 2#									
Left Side	9400/1880	RMC	0.177	0.106	-0.060	18.73	19.00	0.188	/
Tested at the worst position with battery 3#									
Left Side	9400/1880	RMC	0.200	0.118	0.120	18.73	19.00	0.213	/

Table 89: Hotspot SAR test results of UMTS Band II

7.2.4 SAR measurement Result of UMTS Band IV(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	1413/1732.6	RMC	0.358	0.228	0.070	23.59	24.00	0.393	/
Left Hand Tilted 15°	1413/1732.6	RMC	0.342	0.192	0.020	23.59	24.00	0.376	/
Right Hand Touched	1413/1732.6	RMC	0.772	0.433	-0.010	23.59	24.00	0.848	/
Right Hand Touched	1513/1752.6	RMC	0.933	0.518	-0.030	23.61	24.00	1.021	/
Right Hand Touched-Repeated	1513/1752.6	RMC	0.921	0.514	0.050	23.61	24.00	1.008	/
Right Hand Touched	1312/1712.4	RMC	0.756	0.424	0.030	23.70	24.00	0.810	/
Right Hand Tilted 15°	1413/1732.6	RMC	0.583	0.299	0.030	23.59	24.00	0.641	/
Tested at the worst position with battery 2#									
Right Hand Touched	1513/1752.6	RMC	0.865	0.496	0.050	23.61	24.00	0.946	/
Tested at the worst position with battery 3#									
Right Hand Touched	1513/1752.6	RMC	0.911	0.513	0.040	23.61	24.00	0.997	/

Table 90: Head SAR test results of UMTS Band IV

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	1413/1732.6	RMC	0.093	0.052	0.040	23.59	24.00	0.102	/
Back Side	1413/1732.6	RMC	0.102	0.057	0.060	23.59	24.00	0.112	/
Tested at the worst position with battery 2#									
Back Side	1413/1732.6	RMC	0.096	0.055	0.090	23.59	24.00	0.105	/
Tested at the worst position with battery 3#									
Back Side	1413/1732.6	RMC	0.111	0.064	0.060	23.59	24.00	0.122	/

Table 91: Body-Worn SAR test results of UMTS Band IV

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	1413/1732.6	RMC	0.195	0.107	0.180	19.35	20.00	0.226	/
Back Side	1413/1732.6	RMC	0.219	0.120	0.030	19.35	20.00	0.254	/
Left Side	1413/1732.6	RMC	0.196	0.111	-0.010	19.35	20.00	0.228	/
Top Side	1413/1732.6	RMC	0.272	0.142	-0.110	19.35	20.00	0.316	/
Tested at the worst position with battery 2#									
Top Side	1413/1732.6	RMC	0.247	0.122	0.150	19.35	20.00	0.287	/
Tested at the worst position with battery 3#									
Top Side	1413/1732.6	RMC	0.252	0.135	0.080	19.35	20.00	0.293	/

Table 92: Hotspot SAR test results of UMTS Band IV

7.2.5 SAR measurement Result of UMTS Band V(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	4182/836.4	RMC	0.832	0.459	-0.020	23.87	24.20	0.898	/
Left Hand Touched	4132/826.4	RMC	0.696	0.384	0.050	23.74	24.20	0.774	/
Left Hand Touched	4233/846.6	RMC	0.861	0.532	0.020	23.91	24.20	0.920	/
Left Hand Tilted 15°	4182/836.4	RMC	0.787	0.412	0.020	23.87	24.20	0.849	/
Left Hand Tilted 15°	4132/826.4	RMC	0.567	0.337	0.030	23.74	24.20	0.630	/
Left Hand Tilted 15°	4233/846.6	RMC	0.741	0.388	0.100	23.91	24.20	0.792	/
Right Hand Touched	4182/836.4	RMC	1.290	0.680	0.010	23.87	24.20	1.392	/
Right Hand Touched	4132/826.4	RMC	1.150	0.603	0.000	23.74	24.20	1.278	/
Right Hand Touched	4233/846.6	RMC	1.350	0.718	0.000	23.91	24.20	1.443	/
Right Hand Tilted 15°	4182/836.4	RMC	1.070	0.517	0.190	23.87	24.20	1.154	/
Right Hand Tilted 15°	4132/826.4	RMC	0.795	0.499	0.040	23.74	24.20	0.884	/
Right Hand Tilted 15°	4233/846.6	RMC	1.110	0.538	0.020	23.91	24.20	1.187	/
Tested at the worst position with battery 2#									
Right Hand Touched	4233/846.6	RMC	1.380	0.719	-0.030	23.91	24.20	1.475	/
Right Hand Touched	4182/836.4	RMC	1.310	0.689	0.040	23.87	24.20	1.413	/
Tested at the worst position with battery 3#									
Right Hand Touched	4233/846.6	RMC	1.370	0.717	0.050	23.91	24.20	1.465	/
Right Hand Touched	4182/836.4	RMC	1.380	0.720	0.020	23.87	24.20	1.489	/
Right Hand Touched-Repeated	4182/836.4	RMC	1.360	0.710	0.020	23.87	24.20	1.467	/
Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
Left Hand Touched	4182/836.4	RMC	0.454	0.244	-0.170	19.89	20.70	0.547	/
Left Hand Tilted 15°	4182/836.4	RMC	0.439	0.225	0.070	19.89	20.70	0.529	/
Right Hand Touched	4182/836.4	RMC	0.742	0.384	-0.060	19.89	20.70	0.894	/
Right Hand Touched	4132/826.4	RMC	0.553	0.366	0.010	19.71	20.70	0.695	/

Right Hand Touched	4233/846.6	RMC	0.774	0.403	0.010	19.85	20.70	0.941	/
--------------------	------------	-----	-------	-------	-------	-------	-------	-------	---

Table 93: Head SAR test results of UMTS Band V

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.172	0.104	0.020	23.87	24.20	0.186	/
Back Side	4182/836.4	RMC	0.207	0.123	-0.050	23.87	24.20	0.223	/
Tested at the worst position with battery 2#									
Back Side	4182/836.4	RMC	0.218	0.129	-0.110	23.87	24.20	0.235	/
Tested at the worst position with battery 3#									
Back Side	4182/836.4	RMC	0.223	0.132	-0.080	23.87	24.20	0.241	/

Table 94: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.188	0.106	0.100	23.36	23.70	0.203	/
Back Side	4182/836.4	RMC	0.362	0.236	0.010	23.36	23.70	0.391	/
Left Side	4182/836.4	RMC	0.127	0.085	0.090	23.36	23.70	0.137	/
Top Side	4182/836.4	RMC	0.151	0.075	-0.040	23.36	23.70	0.163	/
Tested at the worst position with battery 2#									
Back Side	4182/836.4	RMC	0.498	0.274	0.000	23.36	23.70	0.539	/
Tested at the worst position with battery 3#									
Back Side	4182/836.4	RMC	0.495	0.274	0.020	23.36	23.70	0.535	/

Table 95: Hotspot SAR test results of UMTS Band V

7.2.6 SAR measurement Result of LTE Band II(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	19100/1900	20M QPSK 1RB#0	0.280	0.164	0.020	23.37	23.70	0.302	/
Left Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.304	0.187	-0.010	23.37	23.70	0.328	/
Right Hand Touched	19100/1900	20M QPSK 1RB#0	1.040	0.574	0.050	23.37	23.70	1.122	/
Right Hand Touched	18700/1860	20M QPSK 1RB#0	0.944	0.504	-0.100	22.58	23.70	1.222	/
Right Hand Touched	18900/1880	20M QPSK 1RB#99	1.160	0.639	-0.020	22.84	23.70	1.414	/
Right Hand Touched-Repeated	18900/1880	20M QPSK 1RB#99	1.170	0.633	0.060	22.84	23.70	1.426	/
Right Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.845	0.448	0.030	23.37	23.70	0.912	/
Right Hand Tilted 15°	18700/1860	20M QPSK 1RB#0	0.652	0.349	0.080	22.58	23.70	0.844	/
Right Hand Tilted 15°	18900/1880	20M QPSK 1RB#99	0.859	0.445	0.050	22.84	23.70	1.047	/
50%RB									
Left Hand Touched	18700/1860	20M QPSK 50%RB#0	0.200	0.124	0.080	22.47	23.00	0.226	/
Left Hand Tilted 15°	18700/1860	20M QPSK 50%RB#0	0.195	0.113	0.140	22.47	23.00	0.220	/
Right Hand Touched	18700/1860	20M QPSK 50%RB#0	0.778	0.413	0.020	22.47	23.00	0.879	/
Right Hand Touched	18900/1880	20M QPSK 50%RB#25	0.813	0.431	0.020	22.37	23.00	0.940	/
Right Hand Touched	19100/1900	20M QPSK 50%RB#0	1.080	0.571	0.040	22.41	23.00	1.237	/
Right Hand Tilted 15°	18700/1860	20M QPSK 50%RB#0	0.536	0.291	0.030	22.47	23.00	0.606	/
100%RB									
Right Hand Touched	18700/1860	20M QPSK 100%RB#0	0.887	0.473	-0.020	22.32	23.00	1.037	/
Right Hand Tilted 15°	18700/1860	20M QPSK 100%RB#0	0.632	0.341	0.050	22.32	23.00	0.739	/
Tested at the worst position with battery 2#									
Right Hand Touched	18900/1880	20M QPSK 1RB#99	0.872	0.430	0.110	22.84	23.70	1.063	/
Tested at the worst position with battery 3#									
Right Hand Touched	18900/1880	20M QPSK 1RB#99	1.110	0.600	0.160	22.84	23.70	1.353	/

Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
1RB									
Right Hand Touched	18700/1860	20M QPSK 1RB#50	0.643	0.363	0.000	16.93	17.70	0.768	/
50%RB									
Right Hand Touched	18900/1880	20M QPSK 50%RB#25	0.502	0.273	0.080	16.00	17.00	0.632	/

Table 96: Head SAR test results of LTE Band II

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	19100/1900	20M QPSK 1RB#0	0.062	0.038	0.160	23.37	23.70	0.067	/
Back Side	19100/1900	20M QPSK 1RB#0	0.130	0.083	0.160	23.37	23.70	0.140	/
50%RB									
Front Side	18700/1860	20M QPSK 50%RB#0	0.045	0.029	0.040	22.47	23.00	0.051	/
Back Side	18700/1860	20M QPSK 50%RB#0	0.051	0.031	0.050	22.47	23.00	0.057	/
Tested at the worst position with battery 2#									
Back Side	19100/1900	20M QPSK 1RB#0	0.076	0.046	-0.060	23.37	23.70	0.081	/
Tested at the worst position with battery 3#									
Back Side	19100/1900	20M QPSK 1RB#0	0.080	0.049	-0.150	23.37	23.70	0.086	/

Table 97: Body-Worn SAR test results of LTE Band II

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	18700/1860	20M QPSK 1RB#50	0.166	0.102	0.050	20.42	20.70	0.177	/
Back Side	18700/1860	20M QPSK 1RB#50	0.248	0.158	0.180	20.42	20.70	0.265	/
Left Side	18700/1860	20M QPSK 1RB#50	0.234	0.131	0.030	20.42	20.70	0.250	/
Top Side	18700/1860	20M QPSK 1RB#50	0.196	0.102	0.000	20.42	20.70	0.209	/
50%RB									
Front Side	19100/1900	20M QPSK 50%RB#0	0.171	0.105	0.010	19.42	20.00	0.195	/
Back Side	19100/1900	20M QPSK 50%RB#0	0.255	0.162	0.060	19.42	20.00	0.291	/
Left Side	19100/1900	20M QPSK 50%RB#0	0.208	0.117	-0.010	19.42	20.00	0.238	/
Top Side	19100/1900	20M QPSK 50%RB#0	0.207	0.107	-0.150	19.42	20.00	0.237	/
Tested at the worst position with battery 2#									
Back Side	19100/1900	20M QPSK 50%RB#0	0.254	0.158	0.120	19.42	20.00	0.290	/
Tested at the worst position with battery 3#									
Back Side	19100/1900	20M QPSK 50%RB#0	0.240	0.151	-0.060	19.42	20.00	0.274	/

Table 98: Hotspot SAR test results of LTE Band II

**7.2.7 SAR measurement Result of LTE Band IV(Second Antenna)**

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	20300/1745	20M QPSK 1RB#50	0.340	0.215	0.030	23.40	23.80	0.373	/
Left Hand Tilted 15°	20300/1745	20M QPSK 1RB#50	0.344	0.194	0.060	23.40	23.80	0.377	/
Right Hand Touched	20300/1745	20M QPSK 1RB#50	0.811	0.447	0.020	23.40	23.80	0.889	/
Right Hand Touched	20050/1720	20M QPSK 1RB#0	0.731	0.403	0.030	23.25	23.80	0.830	/
Right Hand Touched	20175/1732.5	20M QPSK 1RB#0	0.823	0.453	0.030	23.23	23.80	0.938	/
Right Hand Tilted 15°	20300/1745	20M QPSK 1RB#50	0.637	0.363	0.030	23.40	23.80	0.698	/
50%RB									
Left Hand Touched	20300/1745	20M QPSK 50%RB#25	0.289	0.177	0.060	22.42	23.00	0.330	/
Left Hand Tilted 15°	20300/1745	20M QPSK 50%RB#25	0.258	0.159	0.050	22.42	23.00	0.295	/
Right Hand Touched	20300/1745	20M QPSK 50%RB#25	0.667	0.375	0.040	22.42	23.00	0.762	/
Right Hand Tilted 15°	20300/1745	20M QPSK 50%RB#25	0.525	0.298	0.040	22.42	23.00	0.600	/
100%RB									
Right Hand Touched	20175/1732.5	20M QPSK 100%RB#0	0.847	0.456	0.030	22.25	23.00	1.007	/
Tested at the worst position with battery 2#									
Right Hand Touched	20175/1732.5	20M QPSK 100%RB#0	0.944	0.531	-0.050	22.25	23.00	1.122	/
Right Hand Touched-Repeated	20175/1732.5	20M QPSK 100%RB#0	1.030	0.564	0.000	22.25	23.00	1.224	/
Tested at the worst position with battery 3#									
Right Hand Touched	20175/1732.5	20M QPSK 100%RB#0	0.939	0.519	0.110	22.25	23.00	1.116	/

Table 99: Head SAR test results of LTE Band IV



Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20300/1745	20M QPSK 1RB#50	0.078	0.045	0.130	23.40	23.80	0.085	/
Back Side	20300/1745	20M QPSK 1RB#50	0.100	0.057	0.010	23.40	23.80	0.110	/
50%RB									
Front Side	20300/1745	20M QPSK 50%RB#25	0.063	0.037	0.110	22.42	23.00	0.072	/
Back Side	20300/1745	20M QPSK 50%RB#25	0.081	0.046	0.150	22.42	23.00	0.093	/
Tested at the worst position with battery 2#									
Back Side	20300/1745	20M QPSK 1RB#50	0.097	0.057	0.040	23.40	23.80	0.106	/
Tested at the worst position with battery 3#									
Back Side	20300/1745	20M QPSK 1RB#50	0.109	0.064	-0.040	23.40	23.80	0.120	/

Table 100: Body-Worn SAR test results of LTE Band IV

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20300/1745	20M QPSK 1RB#50	0.168	0.091	0.150	18.54	19.30	0.200	/
Back Side	20300/1745	20M QPSK 1RB#50	0.202	0.109	-0.020	18.54	19.30	0.241	/
Left Side	20300/1745	20M QPSK 1RB#50	0.091	0.052	0.170	18.54	19.30	0.108	/
Top Side	20300/1745	20M QPSK 1RB#50	0.242	0.124	0.180	18.54	19.30	0.288	/
50%RB									
Front Side	20175/1732.5	20M QPSK 50%RB#0	0.146	0.082	0.030	17.48	18.50	0.185	/
Back Side	20175/1732.6	20M QPSK 50%RB#0	0.167	0.094	0.160	17.48	18.50	0.211	/
Left Side	20175/1732.7	20M QPSK 50%RB#0	0.076	0.043	0.030	17.48	18.50	0.096	/
Top Side	20175/1732.9	20M QPSK 50%RB#0	0.191	0.098	0.100	17.48	18.50	0.242	/
Tested at the worst position with battery 2#									
Top Side	20300/1745	20M QPSK 1RB#50	0.200	0.106	-0.110	18.54	19.30	0.238	/
Tested at the worst position with battery 3#									
Top Side	20300/1745	20M QPSK 1RB#50	0.218	0.116	-0.080	18.54	19.30	0.260	/

Table 101: Hotspot SAR test results of LTE Band IV

**7.2.8 SAR measurement Result of LTE Band V(Second Antenna)**

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	20600/844	10M QPSK 1RB#25	0.651	0.352	0.070	23.47	24.00	0.735	/
Left Hand Tilted 15°	20600/844	10M QPSK 1RB#25	0.612	0.317	0.020	23.47	24.00	0.691	/
Right Hand Touched	20600/844	10M QPSK 1RB#25	1.040	0.546	-0.010	23.47	24.00	1.175	/
Right Hand Touched	20450/829	10M QPSK 1RB#25	1.090	0.566	-0.020	23.43	24.00	1.243	/
Right Hand Touched	20525/836.5	10M QPSK 1RB#25	0.801	0.418	0.010	23.10	24.00	0.985	/
Right Hand Tilted 15°	20600/844	10M QPSK 1RB#25	0.931	0.045	0.010	23.47	24.00	1.052	/
Right Hand Tilted 15°	20450/829	10M QPSK 1RB#25	0.950	0.459	-0.060	23.43	24.00	1.083	/
Right Hand Tilted 15°	20525/836.5	10M QPSK 1RB#25	0.801	0.418	0.010	23.10	24.00	0.985	/
50%RB									
Left Hand Touched	20450/829	10M QPSK 50%RB#13	0.457	0.247	0.090	22.29	23.00	0.538	/
Left Hand Tilted 15°	20450/829	10M QPSK 50%RB#13	0.432	0.222	0.080	22.29	23.00	0.509	/
Right Hand Touched	20450/829	10M QPSK 50%RB#13	0.937	0.474	-0.080	22.29	23.00	1.103	/
Right Hand Touched	20525/836.5	10M QPSK 50%RB#13	0.614	0.382	-0.010	21.90	23.00	0.791	/
Right Hand Touched	20600/844	10M QPSK 50%RB#13	0.890	0.453	0.040	22.08	23.00	1.100	/
Right Hand Tilted 15°	20450/829	10M QPSK 50%RB#13	0.829	0.376	-0.020	22.29	23.00	0.976	/
Right Hand Tilted 15°	20525/836.5	10M QPSK 50%RB#13	0.479	0.293	0.040	21.90	23.00	0.617	/
Right Hand Tilted 15°	20600/844	10M QPSK 50%RB#13	0.787	0.364	-0.020	22.08	23.00	0.973	/
100%RB									
Right Hand Touched	20600/844	10M QPSK 100%RB#0	0.899	0.454	-0.060	22.04	23.00	1.121	/
Right Hand Tilted 15°	20600/844	10M QPSK 100%RB#0	0.673	0.318	-0.090	22.04	23.00	0.839	/
Tested at the worst position with battery 2#									
Right Hand Touched	20450/829	10M QPSK 1RB#25	1.250	0.645	-0.130	23.47	24.00	1.412	/
Right Hand Touched-Repeated	20450/829	10M QPSK 1RB#25	1.210	0.633	-0.040	23.47	24.00	1.367	/
Tested at the worst position with battery 3#									
Right Hand Touched	20450/829	10M QPSK 1RB#25	1.110	0.566	0.030	23.47	24.00	1.254	/

Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
1RB									
Right Hand Touched	20600/844	10M QPSK 1RB#49	1.020	0.477	0.060	20.29	20.50	1.071	/
Right Hand Touched	20450/829	10M QPSK 1RB#49	0.922	0.477	0.020	20.10	20.50	1.011	/
Right Hand Touched	20525/836.5	10M QPSK 1RB#49	0.623	0.323	0.040	20.07	20.50	0.688	/
50%RB									
Right Hand Touched	20450/829	10M QPSK 50%RB#13	0.575	0.296	-0.020	18.84	19.50	0.669	/
100%RB									
Right Hand Touched	20450/829	10M QPSK 100%RB#0	0.467	0.297	0.020	18.52	19.50	0.585	/

Table 102: Head SAR test results of LTE Band V

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.109	0.072 9	-0.170	23.47	24.00	0.123	/
Back Side	20600/844	10M QPSK 1RB#25	0.124	0.074	-0.160	23.47	24.00	0.140	/
50%RB									
Front Side	20450/829	10M QPSK 50%RB#13	0.075	0.048 8	0.110	22.29	23.00	0.088	/
Back Side	20450/829	10M QPSK 50%RB#13	0.087	0.056	-0.010	22.29	23.00	0.102	/
Tested at the worst position with battery 2#									
Back Side	20600/844	10M QPSK 1RB#25	0.177	0.104	0.010	23.47	24.00	0.200	/
Tested at the worst position with battery 3#									
Back Side	20600/844	10M QPSK 1RB#25	0.120	0.082	0.180	23.47	24.00	0.136	/

Table 103: Body-Worn SAR test results of LTE Band V

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.413	0.233	0.060	21.84	22.00	0.428	/
Back Side	20600/844	10M QPSK 1RB#25	0.468	0.262	0.190	21.84	22.00	0.486	/
Left Side	20600/844	10M QPSK 1RB#25	0.278	0.190	0.010	21.84	22.00	0.288	/
Top Side	20600/844	10M QPSK 1RB#25	0.330	0.163	-0.140	21.84	22.00	0.342	/
50%RB									
Front Side	20600/844	10M QPSK 50%RB#13	0.272	0.172	0.040	20.51	21.00	0.304	/
Back Side	20600/844	10M QPSK 50%RB#13	0.369	0.223	-0.010	20.51	21.00	0.413	/
Left Side	20600/844	10M QPSK 50%RB#13	0.241	0.161	0.010	20.51	21.00	0.270	/
Top Side	20600/844	10M QPSK 50%RB#13	0.236	0.119	-0.130	20.51	21.00	0.264	/
Tested at the worst position with battery 2#									
Back Side	20600/844	10M QPSK 1RB#25	0.404	0.225	0.050	21.84	22.00	0.419	/
Tested at the worst position with battery 3#									
Back Side	20600/844	10M QPSK 1RB#25	0.480	0.262	0.010	21.84	22.00	0.498	/

Table 104: Hotspot SAR test results of LTE Band V

7.2.9 SAR measurement Result of LTE Band VII(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	21350/2560	20M QPSK 1RB#50	0.331	0.182	0.060	23.23	24.00	0.395	/
Left Hand Tilted 15°	21350/2560	20M QPSK 1RB#50	0.275	0.140	0.180	23.23	24.00	0.328	/
Right Hand Touched	21350/2560	20M QPSK 1RB#50	1.200	0.570	-0.060	23.23	24.00	1.433	/
Right Hand Touched-Repeated	21350/2560	20M QPSK 1RB#50	1.170	0.553	0.060	23.23	24.00	1.397	/
Right Hand Touched	20850/2510	20M QPSK 1RB#0	0.914	0.453	0.070	23.05	24.00	1.137	/
Right Hand Touched	21100/2535	20M QPSK 1RB#0	1.030	0.502	0.150	23.02	24.00	1.291	/
Right Hand Tilted 15°	21350/2560	20M QPSK 1RB#50	0.878	0.414	0.020	23.23	24.00	1.048	/
Right Hand Tilted 15°	20850/2510	20M QPSK 1RB#0	0.764	0.382	0.140	23.05	24.00	0.951	/
Right Hand Tilted 15°	21100/2535	20M QPSK 1RB#0	0.822	0.408	0.070	23.02	24.00	1.030	/
50%RB									
Left Hand Touched	21350/2560	20M QPSK 50%RB#50	0.228	0.124	-0.170	22.66	23.00	0.247	/
Left Hand Tilted 15°	21350/2560	20M QPSK 50%RB#50	0.186	0.102	0.020	22.66	23.00	0.201	/
Right Hand Touched	21350/2560	20M QPSK 50%RB#50	0.838	0.400	0.090	22.66	23.00	0.906	/
Right Hand Touched	20850/2510	20M QPSK 50%RB#0	0.869	0.430	0.050	22.50	23.00	0.975	/
Right Hand Touched	21100/2535	20M QPSK 50%RB#0	0.749	0.365	0.130	22.43	23.00	0.854	/
Right Hand Tilted 15°	21350/2560	20M QPSK 50%RB#50	0.685	0.333	0.050	22.66	23.00	0.741	/
100%RB									
Right Hand Touched	21350/2560	20M QPSK 100%RB#0	0.961	0.460	0.180	22.34	23.00	1.119	/
Right Hand Tilted 15°	21350/2560	20M QPSK 100%RB#0	0.762	0.362	0.010	22.34	23.00	0.887	/
Tested at the worst position with battery 2#									
Right Hand Touched	21350/2560	20M QPSK 1RB#50	1.180	0.543	-0.040	23.23	24.00	1.409	/
Tested at the worst position with battery 3#									
Right Hand Touched	21350/2560	20M QPSK 1RB#50	1.200	0.541	0.170	23.23	24.00	1.433	/

Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)

1RB

Right Hand Touched	21350/2560	20M QPSK 1RB#99	0.656	0.302	-0.150	14.75	15.50	0.780	/
--------------------	------------	--------------------	-------	-------	--------	-------	-------	-------	---

50%RB

Right Hand Touched	20850/2510	20M QPSK 50%RB#25	0.625	0.316	0.190	12.85	14.50	0.914	/
--------------------	------------	----------------------	-------	-------	-------	-------	-------	-------	---

Table 105: Head SAR test results of LTE Band VII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					

Test data with battery 1#

1RB

Front Side	21350/2560	20M QPSK 1RB#50	0.091	0.052	0.170	23.23	24.00	0.109	/
------------	------------	--------------------	-------	-------	-------	-------	-------	-------	---

Back Side	21350/2560	20M QPSK 1RB#50	0.112	0.063	-0.160	23.23	24.00	0.134	/
-----------	------------	--------------------	-------	-------	--------	-------	-------	-------	---

50%RB

Front Side	21350/2560	20M QPSK 50%RB#50	0.082	0.045	0.090	22.66	23.00	0.088	/
------------	------------	----------------------	-------	-------	-------	-------	-------	-------	---

Back Side	21350/2560	20M QPSK 50%RB#50	0.091	0.050	0.010	22.66	23.00	0.099	/
-----------	------------	----------------------	-------	-------	-------	-------	-------	-------	---

Tested at the worst position with battery 2#

Back Side	21350/2560	20M QPSK 1RB#50	0.180	0.098	-0.030	23.23	24.00	0.215	/
-----------	------------	--------------------	-------	-------	--------	-------	-------	-------	---

Tested at the worst position with battery 3#

Back Side	21350/2560	20M QPSK 1RB#50	0.159	0.086	0.120	23.23	24.00	0.190	/
-----------	------------	--------------------	-------	-------	-------	-------	-------	-------	---

Table 106: Body-Worn SAR test results of LTE Band VII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20850/2510	20M QPSK 1RB#0	0.035	0.019	0.080	17.93	18.00	0.035	/
Back Side	20850/2510	20M QPSK 1RB#0	0.184	0.080	0.020	17.93	18.00	0.187	/
Left Side	20850/2510	20M QPSK 1RB#0	0.037	0.020	0.050	17.93	18.00	0.038	/
Top Side	20850/2510	20M QPSK 1RB#0	0.015	0.006	0.000	17.93	18.00	0.015	/
50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.024	0.013	0.080	16.68	17.00	0.025	/
Back Side	21100/2535	20M QPSK 50%RB#0	0.136	0.074	0.140	16.68	17.00	0.146	/
Left Side	21100/2535	20M QPSK 50%RB#0	0.029	0.015	0.110	16.68	17.00	0.031	/
Top Side	21100/2535	20M QPSK 50%RB#0	0.011	0.005	-0.130	16.68	17.00	0.011	/
Tested at the worst position with battery 2#									
Back Side	20850/2510	20M QPSK 1RB#0	0.274	0.147	0.070	17.93	18.00	0.278	/
Tested at the worst position with battery 3#									
Back Side	20850/2510	20M QPSK 1RB#0	0.315	0.169	-0.070	17.93	18.00	0.320	/

Table 107: Hotspot SAR test results of LTE Band VII

7.2.10 SAR measurement Result of LTE Band XII(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	23060/704	10M QPSK 1RB#49	0.665	0.363	0.120	23.35	24.00	0.772	/
Left Hand Tilted 15°	23060/704	10M QPSK 1RB#49	0.632	0.333	0.080	23.35	24.00	0.734	/
Right Hand Touched	23060/704	10M QPSK 1RB#49	1.160	0.603	-0.010	23.35	24.00	1.347	/
Right Hand Touched	23095/707.5	10M QPSK 1RB#49	1.080	0.561	-0.010	23.30	24.00	1.269	/
Right Hand Touched	23130/711	10M QPSK 1RB#25	1.130	0.591	-0.010	23.28	24.00	1.334	/
Right Hand Tilted 15°	23060/704	10M QPSK 1RB#49	1.060	0.509	0.140	23.35	24.00	1.231	/
Right Hand Tilted 15°	23095/707.5	10M QPSK 1RB#49	1.010	0.486	0.010	23.30	24.00	1.187	/
Right Hand Tilted 15°	23130/711	10M QPSK 1RB#25	1.060	0.511	0.020	23.28	24.00	1.251	/
50%RB									
Left Hand Touched	23130/711	10M QPSK 50%RB#13	0.511	0.277	0.080	22.19	23.00	0.616	/
Left Hand Tilted 15°	23130/711	10M QPSK 50%RB#13	0.484	0.254	0.140	22.19	23.00	0.583	/
Right Hand Touched	23130/711	10M QPSK 50%RB#13	0.889	0.461	-0.010	22.19	23.00	1.071	/
Right Hand Touched	23060/704	10M QPSK 50%RB#13	0.438	0.226	0.050	21.89	23.00	0.566	/
Right Hand Touched	23095/707.5	10M QPSK 50%RB#13	0.790	0.409	0.030	21.87	23.00	1.025	/
Right Hand Tilted 15°	23130/711	10M QPSK 50%RB#13	0.768	0.375	-0.030	22.19	23.00	0.925	/
Right Hand Tilted 15°	23060/704	10M QPSK 50%RB#13	0.397	0.207	-0.040	21.89	23.00	0.513	/
Right Hand Tilted 15°	23095/707.5	10M QPSK 50%RB#13	0.706	0.367	-0.020	21.87	23.00	0.916	/
100%RB									
Right Hand Touched	23060/704	10M QPSK 100%RB#0	0.483	0.280	-0.070	21.88	23.00	0.625	/
Right Hand Tilted 15°	23060/704	10M QPSK 100%RB#0	0.429	0.210	0.130	21.88	23.00	0.555	/
Tested at the worst position with battery 2#									
Right Hand Touched	23060/704	10M QPSK 1RB#49	1.200	0.617	0.000	23.26	24.00	1.423	/
Right Hand Touched-Repeated	23060/704	10M QPSK 1RB#49	1.200	0.616	0.000	23.35	24.00	1.394	/
Tested at the worst position with battery 3#									
Right Hand Touched	23060/704	10M QPSK 1RB#49	1.080	0.561	0.080	23.35	24.00	1.254	/

Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
1RB									
Right Hand Touched	23060/704	10M QPSK 1RB#49	0.874	0.462	0.010	20.76	21.50	1.036	/
Right Hand Touched	23095/707.5	10M QPSK 1RB#49	0.795	0.459	0.020	20.37	21.50	1.031	/
Right Hand Touched	23130/711	10M QPSK 1RB#25	0.849	0.449	0.020	20.72	21.50	1.016	/
50%RB									
Right Hand Touched	23130/711	10M QPSK 50%RB#13	0.679	0.380	0.010	20.45	20.50	0.687	/
100%RB									
Right Hand Touched	23060/704	10M QPSK 100%RB#0	0.368	0.206	-0.010	20.28	20.50	0.387	/

Table 108: Head SAR test results of LTE Band XII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23060/704	10M QPSK 1RB#49	0.184	0.138	0.060	23.35	24.00	0.214	/
Back Side	23060/704	10M QPSK 1RB#49	0.201	0.148	0.030	23.35	24.00	0.233	/
50%RB									
Front Side	23130/711	10M QPSK 50%RB#13	0.114	0.081	0.050	22.19	23.00	0.137	/
Back Side	23130/711	10M QPSK 50%RB#13	0.129	0.091	0.090	22.19	23.00	0.155	/
Tested at the worst position with battery 2#									
Back Side	23060/704	10M QPSK 1RB#49	0.217	0.132	0.000	23.35	24.00	0.252	/
Tested at the worst position with battery 3#									
Back Side	23060/704	10M QPSK 1RB#49	0.200	0.114	0.160	23.35	24.00	0.232	/

Table 109: Body-Worn SAR test results of LTE Band XII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23060/704	10M QPSK 1RB#49	0.336	0.194	0.070	23.35	24.00	0.390	/
Back Side	23060/704	10M QPSK 1RB#49	0.447	0.251	-0.010	23.35	24.00	0.519	/
Left Side	23060/704	10M QPSK 1RB#49	0.297	0.208	-0.050	23.35	24.00	0.345	/
Top Side	23060/704	10M QPSK 1RB#49	0.259	0.131	0.090	23.35	24.00	0.301	/
50%RB									
Front Side	23130/711	10M QPSK 50%RB#13	0.216	0.124	0.100	22.19	23.00	0.260	/
Back Side	23130/711	10M QPSK 50%RB#13	0.262	0.169	0.000	22.19	23.00	0.316	/
Left Side	23130/711	10M QPSK 50%RB#13	0.190	0.130	0.080	22.19	23.00	0.229	/
Top Side	23130/711	10M QPSK 50%RB#13	0.172	0.087	0.090	22.19	23.00	0.207	/
Tested at the worst position with battery 2#									
Back Side	23060/704	10M QPSK 1RB#49	0.423	0.240	0.030	23.35	24.00	0.491	/
Tested at the worst position with battery 3#									
Back Side	23060/704	10M QPSK 1RB#49	0.451	0.254	-0.010	23.35	24.00	0.524	/

Table 110: Hotspot SAR test results of LTE Band XII

7.2.11 SAR measurement Result of LTE Band XVII(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	23780/709	10M QPSK 1RB#49	0.458	0.250	0.070	23.71	24.00	0.490	/
Left Hand Tilted 15°	23780/709	10M QPSK 1RB#49	0.440	0.232	-0.020	23.71	24.00	0.470	/
Right Hand Touched	23780/709	10M QPSK 1RB#49	0.996	0.523	0.000	23.71	24.00	1.065	/
Right Hand Touched	23790/710	10M QPSK 1RB#49	0.856	0.448	0.030	23.68	24.00	0.921	/
Right Hand Touched	23800/711	10M QPSK 1RB#25	1.190	0.617	0.020	23.69	24.00	1.278	/
Right Hand Tilted 15°	23780/709	10M QPSK 1RB#49	0.922	0.452	0.030	23.71	24.00	0.986	/
Right Hand Tilted 15°	23790/710	10M QPSK 1RB#49	0.764	0.433	0.010	23.68	24.00	0.822	/
Right Hand Tilted 15°	23800/711	10M QPSK 1RB#25	1.170	0.575	0.000	23.69	24.00	1.257	/
50%RB									
Left Hand Touched	23800/711	10M QPSK 50%RB#13	0.435	0.270	0.110	22.78	23.00	0.458	/
Left Hand Tilted 15°	23800/711	10M QPSK 50%RB#13	0.423	0.258	0.050	22.78	23.00	0.445	/
Right Hand Touched	23800/711	10M QPSK 50%RB#13	0.914	0.467	-0.130	22.78	23.00	0.961	/
Right Hand Touched	23780/709	10M QPSK 50%RB#13	1.040	0.532	0.000	22.57	23.00	1.148	/
Right Hand Touched	23790/710	10M QPSK 50%RB#13	1.010	0.514	0.020	22.76	23.00	1.067	/
Right Hand Tilted 15°	23800/711	10M QPSK 50%RB#13	1.000	0.490	0.030	22.78	23.00	1.052	/
Right Hand Tilted 15°	23780/709	10M QPSK 50%RB#13	0.916	0.435	0.020	22.57	23.00	1.011	/
Right Hand Tilted 15°	23790/710	10M QPSK 50%RB#13	0.596	0.425	-0.160	22.76	23.00	0.630	/
100%RB									
Right Hand Touched	23800/711	10M QPSK 100%RB#0	0.883	0.451	0.010	22.53	23.00	0.984	/
Right Hand Tilted 15°	23800/711	10M QPSK 100%RB#0	0.796	0.377	-0.080	22.53	23.00	0.887	/
Tested at the worst position with battery 2#									
Right Hand Touched	23800/711	10M QPSK 1RB#25	1.220	0.633	-0.110	23.69	24.00	1.310	/
Right Hand Touched-Repeated	23800/711	10M QPSK 1RB#25	1.160	0.594	-0.020	23.69	24.00	1.246	/
Tested at the worst position with battery 3#									
Right Hand Touched	23800/711	10M QPSK 1RB#25	1.190	0.623	0.040	23.69	24.00	1.278	/

Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
1RB									
Right Hand Touched	23780/709	10M QPSK 1RB#49	0.734	0.384	0.010	21.04	22.00	0.916	/
Right Hand Touched	23790/710	10M QPSK 1RB#49	0.645	0.363	0.020	21.03	22.00	0.806	/
Right Hand Touched	23800/711	10M QPSK 1RB#25	0.964	0.501	-0.030	20.93	22.00	1.233	/
50%RB									
Right Hand Touched	23800/711	10M QPSK 50%RB#13	0.775	0.400	-0.070	20.27	21.00	0.917	/
Right Hand Touched	23780/709	10M QPSK 50%RB#13	0.860	0.479	0.000	20.19	21.00	1.036	/
Right Hand Touched	23790/710	10M QPSK 50%RB#13	0.832	0.430	0.040	20.22	21.00	0.996	/
100%RB									
Right Hand Touched	23800/711	10M QPSK 100%RB#0	0.750	0.418	0.010	20.25	21.00	0.891	/

Table 111: Head SAR test results of LTE Band XVII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23780/709	10M QPSK 1RB#49	0.107	0.076	0.080	23.71	24.00	0.114	/
Back Side	23780/709	10M QPSK 1RB#49	0.129	0.095	-0.130	23.71	24.00	0.138	/
50%RB									
Front Side	23800/711	10M QPSK 50%RB#13	0.116	0.082	0.040	22.78	23.00	0.122	/
Back Side	23800/711	10M QPSK 50%RB#13	0.139	0.102	0.010	22.78	23.00	0.146	/
Tested at the worst position with battery 2#									
Back Side	23800/711	10M QPSK 50%RB#13	0.189	0.138	0.010	22.78	23.00	0.199	/
Tested at the worst position with battery 3#									
Back Side	23800/711	10M QPSK 50%RB#13	0.195	0.142	-0.010	22.78	23.00	0.205	/

Table 112: Body-Worn SAR test results of LTE Band XVII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23780/709	10M QPSK 1RB#49	0.225	0.130	-0.060	23.71	24.00	0.241	/
Back Side	23780/709	10M QPSK 1RB#49	0.266	0.151	-0.090	23.71	24.00	0.284	/
Left Side	23780/709	10M QPSK 1RB#49	0.210	0.146	0.000	23.71	24.00	0.225	/
Top Side	23780/709	10M QPSK 1RB#49	0.155	0.088	0.030	23.71	24.00	0.166	/
50%RB									
Front Side	23800/711	10M QPSK 50%RB#13	0.239	0.149	-0.030	22.78	23.00	0.251	/
Back Side	23800/711	10M QPSK 50%RB#13	0.261	0.176	-0.050	22.78	23.00	0.275	/
Left Side	23800/711	10M QPSK 50%RB#13	0.216	0.149	0.040	22.78	23.00	0.227	/
Top Side	23800/711	10M QPSK 50%RB#13	0.165	0.094	0.050	22.78	23.00	0.174	/
Tested at the worst position with battery 2#									
Back Side	23780/709	10M QPSK 1RB#49	0.288	0.164	0.010	23.71	24.00	0.308	/
Tested at the worst position with battery 3#									
Back Side	23780/709	10M QPSK 1RB#49	0.327	0.183	0.050	23.71	24.00	0.350	/

Table 113: Hotspot SAR test results of LTE Band XVII

7.2.12 SAR measurement Result of LTE Band XXVI(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	26865/831.5	15M QPSK 1RB#38	0.774	0.422	0.080	24.33	24.50	0.805	/
Left Hand Touched	26775/822.5	15M QPSK 1RB#38	0.395	0.236	0.090	23.86	24.50	0.458	/
Left Hand Touched	26965/841.5	15M QPSK 1RB#38	0.623	0.372	0.070	23.81	24.50	0.730	/
Left Hand Tilted 15°	26865/831.5	15M QPSK 1RB#38	0.738	0.386	0.110	24.33	24.50	0.767	/
Right Hand Touched	26865/831.5	15M QPSK 1RB#38	1.320	0.684	-0.180	24.33	24.50	1.373	/
Right Hand Touched-Repeated	26865/831.5	15M QPSK 1RB#38	1.370	0.707	-0.050	24.33	24.50	1.425	/
Right Hand Touched	26775/822.5	15M QPSK 1RB#38	0.681	0.430	-0.020	23.86	24.50	0.789	/
Right Hand Touched	26965/841.5	15M QPSK 1RB#38	0.967	0.506	0.000	23.81	24.50	1.134	/
Right Hand Tilted 15°	26865/831.5	15M QPSK 1RB#38	1.240	0.580	0.170	24.33	24.50	1.290	/
Right Hand Tilted 15°	26775/822.5	15M QPSK 1RB#38	0.552	0.337	0.020	23.86	24.50	0.640	/
Right Hand Tilted 15°	26965/841.5	15M QPSK 1RB#38	0.900	0.418	0.010	23.81	24.50	1.055	/
50%RB									
Left Hand Touched	26865/831.5	15M QPSK 50%RB#18	0.635	0.379	-0.120	22.85	23.50	0.738	/
Left Hand Tilted 15°	26865/831.5	15M QPSK 50%RB#18	0.571	0.329	0.080	22.85	23.50	0.663	/
Right Hand Touched	26865/831.5	15M QPSK 50%RB#18	1.040	0.535	-0.050	22.85	23.50	1.208	/
Right Hand Tilted 15°	26775/822.5	15M QPSK 50%RB#0	0.688	0.353	-0.050	22.63	23.50	0.841	/
Right Hand Tilted 15°	26965/841.5	15M QPSK 50%RB#18	0.787	0.404	0.020	22.69	23.50	0.948	/
Right Hand Tilted 15°	26865/831.5	15M QPSK 50%RB#18	0.949	0.440	0.030	22.85	23.50	1.102	/
Right Hand Tilted 15°	26775/822.5	15M QPSK 50%RB#0	0.433	0.265	0.020	22.63	23.50	0.529	/
Right Hand Tilted 15°	26965/841.5	15M QPSK 50%RB#18	0.741	0.341	-0.010	22.69	23.50	0.893	/
100%RB									
Left Hand Touched	26865/831.5	15M QPSK 100%RB#0	0.354	0.193	-0.080	22.88	23.50	0.408	/
Right Hand Touched	26865/831.5	15M QPSK 100%RB#0	0.939	0.475	0.050	22.88	23.50	1.083	/
Right Hand Tilted 15°	26865/831.5	15M QPSK 100%RB#0	0.781	0.363	0.140	22.88	23.50	0.901	/

Tested at the worst position with battery 2#									
Right Hand Touched	26865/831.5	15M QPSK 1RB#38	1.020	0.518	0.010	24.09	24.50	1.121	/
Right Hand Tilted 15°	26865/831.5	15M QPSK 1RB#38	0.810	0.382	0.140	24.16	24.50	0.876	/
Tested at the worst position with battery 3#									
Right Hand Touched	26865/831.5	15M QPSK 1RB#38	1.290	0.671	-0.010	24.33	24.50	1.341	/
Right Hand Tilted 15°	26865/831.5	15M QPSK 1RB#38	1.070	0.521	0.070	24.33	24.50	1.113	/
Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
1RB									
Left Hand Tilted 15°	26865/831.5	15M QPSK 1RB#38	0.569	0.329	-0.080	19.92	20.50	0.650	/
Right Hand Touched	26865/831.5	15M QPSK 1RB#38	1.120	0.572	0.030	19.92	20.50	1.280	/
Right Hand Touched	26775/822.5	15M QPSK 1RB#38	0.542	0.344	-0.010	19.61	20.50	0.665	/
Right Hand Touched	26965/841.5	15M QPSK 1RB#38	0.682	0.435	0.020	19.74	20.50	0.812	/
50%RB									
Left Hand Tilted 15°	26865/831.5	15M QPSK 50%RB#18	0.423	0.243	0.040	18.83	19.50	0.494	/
Right Hand Touched	26865/831.5	15M QPSK 50%RB#18	0.827	0.422	-0.010	18.83	19.50	0.965	/
Right Hand Touched	26775/822.5	15M QPSK 50%RB#18	0.475	0.242	0.030	18.64	19.50	0.579	/
Right Hand Touched	26965/841.5	15M QPSK 50%RB#18	0.565	0.359	0.010	18.73	19.50	0.675	/
100%RB									
Right Hand Touched	26865/831.5	15M QPSK 100%RB#0	0.659	0.419	0.050	18.60	19.50	0.811	/

Table 114: Head SAR test results of LTE Band XXVI

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	26865/831.5	15M QPSK 1RB#38	0.144	0.096	0.100	24.33	24.50	0.150	/
Back Side	26865/831.5	15M QPSK 1RB#38	0.174	0.104	0.090	24.33	24.50	0.181	/
50%RB									
Front Side	26865/831.5	15M QPSK 50%RB#18	0.119	0.072	0.110	22.85	23.50	0.138	/
Back Side	26865/831.5	15M QPSK 50%RB#18	0.141	0.089	0.040	22.85	23.50	0.164	/
Tested at the worst position with battery 2#									
Back Side	26865/831.5	15M QPSK 1RB#38	0.168	0.101	0.050	24.33	24.50	0.175	/
Tested at the worst position with battery 3#									
Back Side	26865/831.5	15M QPSK 1RB#38	0.313	0.184	0.140	24.33	24.50	0.325	/

Table 115: Body-Worn SAR test results of LTE Band XXVI

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	26865/831.5	15M QPSK 1RB#38	0.390	0.220	0.130	24.33	24.50	0.406	/
Back Side	26865/831.5	15M QPSK 1RB#38	0.462	0.256	0.130	24.33	24.50	0.480	/
Left Side	26865/831.5	15M QPSK 1RB#38	0.250	0.168	0.030	24.33	24.50	0.260	/
Top Side	26865/831.5	15M QPSK 1RB#38	0.291	0.146	-0.020	24.33	24.50	0.303	/
50%RB									
Front Side	26865/831.5	15M QPSK 50%RB#18	0.287	0.178	0.090	22.85	23.50	0.333	/
Back Side	26865/831.5	15M QPSK 50%RB#18	0.375	0.234	-0.040	22.85	23.50	0.436	/
Left Side	26865/831.5	15M QPSK 50%RB#18	0.205	0.138	-0.070	22.85	23.50	0.238	/
Top Side	26865/831.5	15M QPSK 50%RB#18	0.243	0.122	-0.020	22.85	23.50	0.282	/
Tested at the worst position with battery 2#									
Back Side	26865/831.5	15M QPSK 1RB#38	0.456	0.254	-0.010	24.33	24.50	0.474	/
Tested at the worst position with battery 3#									
Back Side	26865/831.5	15M QPSK 1RB#38	0.356	0.201	0.090	24.33	24.50	0.370	/

Table 116: Hotspot SAR test results of LTE Band XXVI

7.2.13 SAR measurement Result of LTE Band XXXVIII(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	38000/2595	20M QPSK 1RB#50	0.319	0.169	0.170	23.79	24.00	0.335	/
Left Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.275	0.137	0.140	23.79	24.00	0.289	/
Right Hand Touched	38000/2595	20M QPSK 1RB#50	1.290	0.602	0.190	23.79	24.00	1.354	/
Right Hand Touched-Repeated	38000/2595	20M QPSK 1RB#50	1.300	0.586	0.160	23.79	24.00	1.364	/
Right Hand Touched	37850/2580	20M QPSK 1RB#50	1.180	0.553	0.060	23.37	24.00	1.364	/
Right Hand Touched	38150/2610	20M QPSK 1RB#0	1.200	0.555	0.030	23.41	24.00	1.375	/
Right Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.968	0.448	0.100	23.79	24.00	1.016	/
Right Hand Tilted 15°	37850/2580	20M QPSK 1RB#50	0.824	0.385	0.050	23.37	24.00	0.953	/
Right Hand Tilted 15°	38150/2610	20M QPSK 1RB#0	0.922	0.424	0.140	23.41	24.00	1.056	/
50%RB									
Left Hand Touched	38000/2595	20M QPSK 50%RB#25	0.263	0.142	0.070	22.55	23.00	0.292	/
Left Hand Tilted 15°	38000/2595	20M QPSK 50%RB#25	0.244	0.125	0.180	22.55	23.00	0.271	/
Right Hand Touched	38000/2595	20M QPSK 50%RB#25	0.990	0.463	0.170	22.55	23.00	1.098	/
Right Hand Touched	37850/2580	20M QPSK 50%RB#50	0.879	0.414	0.000	22.22	23.00	1.052	/
Right Hand Touched	38150/2610	20M QPSK 50%RB#25	1.030	0.470	0.160	22.29	23.00	1.213	/
Right Hand Tilted 15°	38000/2595	20M QPSK 50%RB#25	0.738	0.343	0.050	22.55	23.00	0.819	/
100%RB									
Right Hand Touched	38000/2595	20M QPSK 100%RB#0	1.020	0.473	0.110	22.26	23.00	1.209	/
Right Hand Tilted 15°	38000/2595	20M QPSK 100%RB#0	0.728	0.338	0.080	22.26	23.00	0.863	/
Tested at the worst position with battery 2#									
Right Hand Touched	38150/2610	20M QPSK 1RB#0	1.060	0.509	0.150	23.41	24.00	1.214	/
Right Hand Touched	38000/2595	20M QPSK 1RB#50	0.869	0.389	0.080	23.79	24.00	0.912	/

Tested at the worst position with battery 3#									
Right Hand Touched	38150/2610	20M QPSK 1RB#0	1.050	0.501	0.080	23.41	24.00	1.203	/
Right Hand Touched	38000/2595	20M QPSK 1RB#50	0.951	0.416	0.110	23.79	24.00	0.998	/
Additional SAR test(Second antenna simultaneous transmission with WIFI antenna)									
1RB									
Right Hand Touched	38000/2595	20M QPSK 1RB#0	0.786	0.355	0.170	17.28	18.00	0.928	/
Right Hand Touched	37850/2580	20M QPSK 1RB#50	0.869	0.407	0.190	17.25	18.00	1.033	/
Right Hand Touched	38150/2610	20M QPSK 1RB#50	0.998	0.443	0.130	17.21	18.00	1.197	/
50%RB									
Right Hand Touched	38150/2610	20M QPSK 50%RB#50	0.825	0.374	0.160	16.51	17.00	0.924	/
Right Hand Touched	37850/2580	20M QPSK 50%RB#25	0.656	0.306	0.170	16.16	17.00	0.796	/
Right Hand Touched	38000/2595	20M QPSK 50%RB#25	0.839	0.386	0.110	16.07	17.00	1.039	/
100%RB									
Right Hand Touched	38150/2610	20M QPSK 100%RB#0	0.881	0.400	0.190	16.27	17.00	1.042	/

Table 117: Head SAR test results of LTE Band XXXVIII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	38000/2595	20M QPSK 1RB#50	0.153	0.086	0.030	23.79	24.00	0.161	/
Back Side	38000/2595	20M QPSK 1RB#50	0.162	0.090	0.080	23.79	24.00	0.170	/
50%RB									
Front Side	38000/2595	20M QPSK 50%RB#25	0.112	0.062	0.110	22.55	23.00	0.124	/
Back Side	38000/2595	20M QPSK 50%RB#25	0.118	0.065	0.030	22.55	23.00	0.131	/
Tested at the worst position with battery 2#									
Back Side	38000/2595	20M QPSK 1RB#50	0.097	0.053	0.100	23.79	24.00	0.102	/
Tested at the worst position with battery 3#									
Back Side	38000/2595	20M QPSK 1RB#50	0.094	0.051	0.180	23.79	24.00	0.098	/

Table 118: Body-Worn SAR test results of LTE Band XXXVIII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	38000/2595	20M QPSK 1RB#0	0.147	0.080	0.080	17.28	18.00	0.174	/
Back Side	38000/2595	20M QPSK 1RB#0	0.202	0.105	0.050	17.28	18.00	0.238	/
Left Side	38000/2595	20M QPSK 1RB#0	0.187	0.099	0.020	17.28	18.00	0.221	/
Top Side	38000/2595	20M QPSK 1RB#0	0.072	0.031	0.120	17.28	18.00	0.085	/
50%RB									
Front Side	38150/2610	20M QPSK 50%RB#50	0.135	0.072	0.120	16.51	17.00	0.151	/
Back Side	38150/2610	20M QPSK 50%RB#50	0.178	0.090	0.040	16.51	17.00	0.199	/
Left Side	38150/2610	20M QPSK 50%RB#50	0.173	0.088	0.180	16.51	17.00	0.194	/
Top Side	38150/2610	20M QPSK 50%RB#50	0.068	0.030	0.070	16.51	17.00	0.076	/
Tested at the worst position with battery 2#									
Back Side	38000/2595	20M QPSK 1RB#0	0.134	0.072	0.030	17.28	18.00	0.158	/
Tested at the worst position with battery 3#									
Back Side	38000/2595	20M QPSK 1RB#0	0.129	0.069	0.100	17.28	18.00	0.152	/

Table 119: Hotspot SAR test results of LTE Band XXXVIII

7.2.14 SAR measurement Result of LTE Band XLI(Second Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	40740/2605	20M QPSK 1RB#50	0.246	0.124	0.110	23.71	24.00	0.263	/
Left Hand Tilted 15°	40740/2605	20M QPSK 1RB#50	0.237	0.108	0.130	23.71	24.00	0.253	/
Right Hand Touched	40740/2605	20M QPSK 1RB#50	0.944	0.427	-0.010	23.71	24.00	1.009	/
Right Hand Touched	40340/2565	20M QPSK 1RB#50	0.761	0.340	0.100	23.37	24.00	0.880	/
Right Hand Touched	41140/2645	20M QPSK 1RB#50	1.020	0.489	0.160	23.34	24.00	1.187	/
Right Hand Tilted 15°	40740/2605	20M QPSK 1RB#50	0.851	0.365	0.130	23.71	24.00	0.910	/
Right Hand Tilted 15°	40340/2565	20M QPSK 1RB#50	0.636	0.287	0.070	23.37	24.00	0.735	/
Right Hand Tilted 15°	41140/2645	20M QPSK 1RB#50	1.000	0.420	0.060	23.34	24.00	1.164	/
50%RB									
Left Hand Touched	40740/2605	20M QPSK 50%RB#25	0.184	0.097	0.000	22.15	23.00	0.224	/
Left Hand Tilted 15°	40740/2605	20M QPSK 50%RB#25	0.181	0.090	0.160	22.15	23.00	0.220	/
Right Hand Touched	40740/2605	20M QPSK 50%RB#25	0.694	0.313	0.180	22.15	23.00	0.844	/
Right Hand Touched	40340/2565	20M QPSK 50%RB#0	0.621	0.303	0.090	22.09	23.00	0.766	/
Right Hand Touched	41140/2645	20M QPSK 50%RB#25	0.793	0.372	0.120	22.14	23.00	0.967	/
Right Hand Tilted 15°	40740/2605	20M QPSK 50%RB#25	0.610	0.262	0.180	22.15	23.00	0.742	/
100%RB									
Right Hand Touched	40740/2605	20M QPSK 100%RB#0	0.748	0.362	0.190	21.95	23.00	0.953	/
Right Hand Tilted 15°	40740/2605	20M QPSK 100%RB#0	0.656	0.320	0.130	21.95	23.00	0.835	/
Tested at the worst position with battery 2#									
Right Hand Touched	41140/2645	20M QPSK 1RB#50	1.070	0.480	0.080	23.34	24.00	1.246	/
Right Hand Touched-Repeated	41140/2645	20M QPSK 1RB#50	1.040	0.496	0.150	23.34	24.00	1.211	/
Tested at the worst position with battery 3#									
Right Hand Touched	41140/2645	20M QPSK 1RB#50	1.050	0.497	0.060	23.34	24.00	1.222	/

Table 120: Head SAR test results of LTE Band XLI

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	40740/2605	20M QPSK 1RB#50	0.108	0.060	0.090	23.71	24.00	0.115	/
Back Side	40740/2605	20M QPSK 1RB#50	0.107	0.059	-0.100	23.71	24.00	0.114	/
50%RB									
Front Side	40340/2565	20M QPSK 50%RB#0	0.080	0.045	0.070	22.15	23.00	0.097	/
Back Side	40340/2565	20M QPSK 50%RB#0	0.082	0.046	-0.060	22.15	23.00	0.100	/
Tested at the worst position with battery 2#									
Front Side	40740/2605	20M QPSK 1RB#50	0.086	0.047	0.140	23.71	24.00	0.092	/
Tested at the worst position with battery 3#									
Front Side	40740/2605	20M QPSK 1RB#50	0.090	0.049	0.180	23.71	24.00	0.096	/

Table 121: Body-Worn SAR test results of LTE Band XLI

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	41140/2645	20M QPSK 1RB#50	0.252	0.134	-0.150	17.94	18.00	0.256	/
Back Side	41140/2645	20M QPSK 1RB#50	0.278	0.140	0.000	17.94	18.00	0.282	/
Left Side	41140/2645	20M QPSK 1RB#50	0.268	0.137	0.150	17.94	18.00	0.272	/
Top Side	41140/2645	20M QPSK 1RB#50	0.109	0.046	0.170	17.94	18.00	0.111	/
50%RB									
Front Side	41140/2645	20M QPSK 50%RB#25	0.197	0.104	0.190	16.90	17.00	0.202	/
Back Side	41140/2645	20M QPSK 50%RB#25	0.206	0.107	-0.050	16.90	17.00	0.211	/
Left Side	41140/2645	20M QPSK 50%RB#25	0.203	0.104	0.100	16.90	17.00	0.208	/
Top Side	41140/2645	20M QPSK 50%RB#25	0.085	0.035	0.150	16.90	17.00	0.087	/
Tested at the worst position with battery 2#									
Back Side	41140/2645	20M QPSK 1RB#50	0.208	0.103	0.060	17.94	18.00	0.211	/
Tested at the worst position with battery 3#									
Back Side	41140/2645	20M QPSK 1RB#50	0.220	0.109	0.150	17.94	18.00	0.223	/

Table 122: Hotspot SAR test results of LTE Band XLI

7.2.15 SAR measurement Result of GSM850(Main Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	190/836.6	GSM	0.231	0.173	-0.080	32.46	33.00	0.262	/
Left Hand Tilted 15°	190/836.6	GSM	0.204	0.140	0.010	32.46	33.00	0.231	/
Right Hand Touched	190/836.6	GSM	0.238	0.181	0.170	32.46	33.00	0.270	/
Right Hand Tilted 15°	190/836.6	GSM	0.138	0.101	-0.050	32.46	33.00	0.156	/
Right Hand Touched	128/824.2	GSM	0.172	0.130	-0.040	32.38	33.00	0.198	/
Right Hand Touched	251/848.8	GSM	0.278	0.211	-0.010	32.48	33.00	0.313	/
Tested at the worst position with battery 2#									
Right Hand Touched	251/848.8	GSM	0.258	0.194	0.090	32.48	33.00	0.291	/
Tested at the worst position with battery 3#									
Right Hand Touched	251/848.8	GSM	0.284	0.214	0.030	32.48	33.00	0.320	/

Table 123: Head SAR test results of GSM850

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	190/836.6	GSM	0.207	0.147	-0.090	32.46	33.00	0.234	/
Back Side	190/836.6	GSM	0.252	0.192	0.010	32.46	33.00	0.285	/
Tested at the worst position with battery 2#									
Back Side	190/836.6	GSM	0.262	0.202	-0.070	32.46	33.00	0.297	/
Tested at the worst position with battery 3#									
Back Side	190/836.6	GSM	0.236	0.167	-0.020	32.46	33.00	0.267	/

Table 124: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	190/836.6	GPRS 2TS	0.299	0.228	-0.070	29.95	31.00	0.381	/
Back Side	190/836.6	GPRS 2TS	0.354	0.272	0.000	29.95	31.00	0.451	/
Left Side	190/836.6	GPRS 2TS	0.169	0.113	-0.080	29.95	31.00	0.215	/
Right Side	190/836.6	GPRS 2TS	0.465	0.316	-0.040	29.95	31.00	0.592	/
Bottom Side	190/836.6	GPRS 2TS	0.135	0.077	0.180	29.95	31.00	0.172	/
Tested at the worst position with battery 2#									
Right Side	190/836.6	GPRS 2TS	0.479	0.325	0.060	29.95	31.00	0.610	/
Tested at the worst position with battery 3#									
Right Side	190/836.6	GPRS 2TS	0.450	0.298	-0.090	29.95	31.00	0.573	/

Table 125: Hotspot SAR test results of GSM850

7.2.16 SAR measurement Result of GSM1900(Main Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	661/1880	GSM	0.168	0.106	0.530	29.70	30.20	0.188	/
Left Hand Tilted 15°	661/1880	GSM	0.111	0.065	0.160	29.70	30.20	0.125	/
Right Hand Touched	661/1880	GSM	0.307	0.189	0.170	29.70	30.20	0.344	/
Right Hand Tilted 15°	661/1880	GSM	0.091	0.056	0.040	29.70	30.20	0.102	/
Right Hand Touched	512/1850.2	GSM	0.328	0.206	0.090	29.73	30.20	0.365	/
Right Hand Touched	810/1909.8	GSM	0.313	0.190	0.040	29.88	30.20	0.337	/
Tested at the worst position with battery 2#									
Right Hand Touched	512/1850.2	GSM	0.367	0.224	0.170	29.73	30.20	0.409	/
Tested at the worst position with battery 3#									
Right Hand Touched	512/1850.2	GSM	0.408	0.252	0.070	29.73	30.20	0.455	/

Table 126: Head SAR test results of GSM1900

Test Position of Body-Worn with 15mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	661/1880	GSM	0.204	0.114	-0.090	29.70	30.20	0.229	/
Back Side	661/1880	GSM	0.324	0.177	0.110	29.70	30.20	0.364	/
Tested at the worst position with battery 2#									
Back Side	661/1880	GSM	0.295	0.166	0.070	29.70	30.20	0.331	/
Tested at the worst position with battery 3#									
Back Side	661/1880	GSM	0.326	0.177	0.090	29.70	30.20	0.366	/

Table 127: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	661/1880	GPRS 2TS	0.388	0.208	-0.090	26.80	28.20	0.536	/
Back Side	661/1880	GPRS 2TS	0.620	0.312	0.180	26.80	28.20	0.856	/
Back Side	512/1850.2	GPRS 2TS	0.647	0.322	0.040	27.08	28.20	0.837	/
Back Side	810/1909.8	GPRS 2TS	0.683	0.345	0.100	26.92	28.20	0.917	/
Left Side	661/1880	GPRS 2TS	0.031	0.018	-0.080	26.80	28.20	0.043	/
Right Side	661/1880	GPRS 2TS	0.293	0.167	0.150	26.80	28.20	0.404	/
Bottom Side	661/1880	GPRS 2TS	0.706	0.379	0.140	26.80	28.20	0.975	/
Bottom Side	512/1850.2	GPRS 2TS	0.648	0.344	0.180	27.08	28.20	0.839	/
Bottom Side	810/1909.8	GPRS 2TS	0.795	0.428	0.190	26.92	28.20	1.067	/
Tested at the worst position with battery 2#									
Bottom Side	810/1909.8	GPRS 2TS	0.611	0.308	0.060	26.92	28.20	0.820	/
Tested at the worst position with battery 3#									
Bottom Side	810/1909.8	GPRS 2TS	0.780	0.417	0.120	26.92	28.20	1.047	/

Table 128: Hotspot SAR test results of GSM1900

7.2.17 SAR measurement Result of UMTS Band II(Main Antenna)

Test Position of Head	Test channel /Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	9400/1880	RMC	0.354	0.222	-0.150	23.79	24.00	0.372	/
Left Hand Tilted 15°	9400/1880	RMC	0.247	0.146	0.190	23.79	24.00	0.259	/
Right Hand Touched	9400/1880	RMC	0.681	0.420	0.170	23.79	24.00	0.715	/
Right Hand Tilted 15°	9400/1880	RMC	0.185	0.114	0.100	23.79	24.00	0.194	/
Right Hand Touched	9262/1852.4	RMC	0.688	0.431	0.180	23.81	24.00	0.719	/
Right Hand Touched	9538/1907.6	RMC	0.642	0.389	0.080	23.83	24.00	0.668	/
Tested at the worst position with battery 2#									
Right Hand Touched	9262/1852.4	RMC	0.702	0.436	0.110	23.81	24.00	0.733	/
Tested at the worst position with battery 3#									
Right Hand Touched	9262/1852.4	RMC	0.676	0.422	0.040	23.81	24.00	0.706	/

Table 129: Head SAR test results of UMTS Band II

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	9400/1880	RMC	0.421	0.238	0.170	23.79	24.00	0.442	/
Back Side	9400/1880	RMC	0.653	0.355	-0.020	23.79	24.00	0.685	/
Tested at the worst position with battery 2#									
Back Side	9400/1880	RMC	0.517	0.286	0.100	23.79	24.00	0.543	/
Tested at the worst position with battery 3#									
Back Side	9400/1880	RMC	0.578	0.331	0.190	23.79	24.00	0.607	/

Table 130: Body-Worn SAR test results of UMTS Band II

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	9400/1880	RMC	0.401	0.218	-0.190	20.21	21.00	0.481	/
Back Side	9400/1880	RMC	0.603	0.309	-0.080	20.21	21.00	0.723	/
Left Side	9400/1880	RMC	0.041	0.025	0.010	20.21	21.00	0.050	/
Right Side	9400/1880	RMC	0.305	0.183	-0.010	20.21	21.00	0.366	/
Bottom Side	9400/1880	RMC	0.671	0.364	0.150	20.21	21.00	0.805	/
Bottom Side	9262/1852.4	RMC	0.673	0.362	0.120	20.28	21.00	0.794	/
Bottom Side	9538/1907.6	RMC	0.711	0.385	-0.130	20.22	21.00	0.851	/
Tested at the worst position with battery 2#									
Bottom Side	9538/1907.6	RMC	0.694	0.376	0.160	20.22	21.00	0.831	/
Tested at the worst position with battery 3#									
Bottom Side	9538/1907.6	RMC	0.858	0.461	-0.030	20.22	21.00	1.027	/
Bottom Side-Repeated	9538/1907.6	RMC	0.840	0.451	0.030	20.22	21.00	1.005	/

Table 131: Hotspot SAR test results of UMTS Band II

7.2.18 SAR measurement Result of UMTS Band IV(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Right Hand Touched	1413/1732.6	RMC	0.496	0.324	0.090	23.55	24.00	0.550	State 1
Right Hand Touched	1413/1732.6	RMC	0.407	0.268	-0.070	23.55	24.00	0.451	State 2
Left Hand Touched	1413/1732.6	RMC	0.314	0.217	-0.190	23.55	24.00	0.348	State 1
Left Hand Tilted 15°	1413/1732.6	RMC	0.234	0.152	-0.020	23.55	24.00	0.260	State 1
Right Hand Touched	1413/1732.6	RMC	0.496	0.324	0.090	23.55	24.00	0.550	State 1
Right Hand Tilted 15°	1413/1732.6	RMC	0.207	0.135	-0.150	23.55	24.00	0.230	State 1
Right Hand Touched	1312/1712.4	RMC	0.378	0.250	-0.030	23.63	24.00	0.412	State 1
Right Hand Touched	1513/1752.6	RMC	0.590	0.380	0.040	23.56	24.00	0.653	State 1
Tested at the worst position with battery 2#									
Right Hand Touched	1513/1752.6	RMC	0.445	0.292	-0.160	23.56	24.00	0.492	State 1
Tested at the worst position with battery 3#									
Right Hand Touched	1513/1752.6	RMC	0.629	0.406	0.120	23.56	24.00	0.696	State 1
Right Hand Touched	1513/1752.6	RMC	0.561	0.363	0.050	23.56	24.00	0.621	State 2

Table 132: Head SAR test results of UMTS Band IV

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Back Side	1413/1732.6	RMC	0.466	0.302	-0.050	23.55	24.00	0.517	State 1
Back Side	1413/1732.6	RMC	0.364	0.232	-0.150	23.55	24.00	0.404	State 2
Front Side	1413/1732.6	RMC	0.412	0.271	-0.040	23.55	24.00	0.457	State 1
Tested at the worst position with battery 2#									
Back Side	1413/1732.6	RMC	0.419	0.272	0.010	23.55	24.00	0.465	State 1
Tested at the worst position with battery 3#									
Back Side	1413/1732.6	RMC	0.412	0.257	0.080	23.55	24.00	0.457	State 1

Table 133: Body-Worn SAR test results of UMTS Band IV

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Back Side	1413/1732.6	RMC	0.662	0.381	0.050	23.12	23.50	0.723	State 1
Back Side	1413/1732.6	RMC	0.603	0.342	-0.090	23.12	23.50	0.658	State 2
Front Side	1413/1732.6	RMC	0.550	0.321	-0.140	23.12	23.50	0.600	State 1
Back Side	1413/1732.6	RMC	0.662	0.381	0.050	23.12	23.50	0.723	State 1
Left Side	1413/1732.6	RMC	0.098	0.055	-0.070	23.12	23.50	0.107	State 1
Right Side	1413/1732.6	RMC	0.369	0.221	-0.040	23.12	23.50	0.403	State 1
Bottom Side	1413/1732.6	RMC	0.549	0.283	0.050	23.12	23.50	0.599	State 1
Tested at the worst position with battery 2#									
Back Side	1413/1732.6	RMC	0.788	0.470	-0.050	23.12	23.50	0.860	State 1
Back Side	1312/1712.4	RMC	0.815	0.487	0.050	23.14	23.50	0.885	State 1
Back Side Reported	1312/1712.4	RMC	0.830	0.478	-0.110	23.14	23.50	0.902	State 1
Back Side	1312/1712.4	RMC	0.812	0.485	0.010	23.14	23.50	0.882	State 2
Back Side	1513/1752.6	RMC	0.784	0.467	0.030	23.06	23.50	0.868	State 1
Tested at the worst position with battery 3#									
Back Side	1413/1732.6	RMC	0.781	0.460	0.020	23.12	23.50	0.852	State 1
Back Side	1312/1712.4	RMC	0.783	0.464	-0.050	23.14	23.50	0.851	State 1
Back Side	1513/1752.6	RMC	0.773	0.452	0.040	23.06	23.50	0.855	State 1

Table 134: Hotspot SAR test results of UMTS Band IV

7.2.19 SAR measurement Result of UMTS Band V(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Left Hand Touched	4182/836.4	RMC	0.235	0.177	0.190	23.88	24.50	0.271	/
Left Hand Tilted 15°	4182/836.4	RMC	0.202	0.146	0.030	23.88	24.50	0.233	/
Right Hand Touched	4182/836.4	RMC	0.292	0.221	-0.030	23.88	24.50	0.337	/
Right Hand Tilted 15°	4182/836.4	RMC	0.202	0.140	0.000	23.88	24.50	0.233	/
Right Hand Touched	4132/826.4	RMC	0.262	0.200	-0.040	23.78	24.50	0.309	/
Right Hand Touched	4233/846.6	RMC	0.323	0.246	0.110	23.87	24.50	0.373	/
Tested at the worst position with battery 2#									
Right Hand Touched	4233/846.6	RMC	0.265	0.201	0.090	23.87	24.50	0.306	/
Tested at the worst position with battery 3#									
Right Hand Touched	4233/846.6	RMC	0.271	0.206	0.020	23.87	24.50	0.313	/

Table 135: Head SAR test results of UMTS Band V

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.197	0.150	-0.070	23.88	24.50	0.227	/
Back Side	4182/836.4	RMC	0.231	0.176	0.030	23.88	24.50	0.266	/
Tested at the worst position with battery 2#									
Back Side	4182/836.4	RMC	0.267	0.189	-0.010	23.88	24.50	0.308	/
Tested at the worst position with battery 3#									
Back Side	4182/836.4	RMC	0.295	0.224	0.000	23.88	24.50	0.340	/

Table 136: Body-Worn SAR test results of UMTS Band V

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR1-g (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
Front Side	4182/836.4	RMC	0.223	0.169	-0.020	23.88	24.50	0.257	/
Back Side	4182/836.4	RMC	0.272	0.158	0.070	23.88	24.50	0.314	/
Left Side	4182/836.4	RMC	0.101	0.068	-0.010	23.88	24.50	0.116	/
Right Side	4182/836.4	RMC	0.354	0.240	-0.040	23.88	24.50	0.408	/
Bottom Side	4182/836.4	RMC	0.123	0.064	0.150	23.88	24.50	0.142	/
Tested at the worst position with battery 2#									
Right Side	4182/836.4	RMC	0.448	0.304	-0.110	23.88	24.50	0.517	/
Tested at the worst position with battery 3#									
Right Side	4182/836.4	RMC	0.463	0.314	-0.090	23.88	24.50	0.534	/

Table 137: Hotspot SAR test results of UMTS Band V

7.2.20 SAR measurement Result of LTE Band II(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	19100/1900	20M QPSK 1RB#0	0.327	0.204	-0.080	23.31	23.70	0.358	/
Left Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.274	0.152	0.060	23.31	23.70	0.300	/
Right Hand Touched	19100/1900	20M QPSK 1RB#0	0.639	0.394	0.020	23.31	23.70	0.699	/
Right Hand Tilted 15°	19100/1900	20M QPSK 1RB#0	0.197	0.121	0.020	23.31	23.70	0.216	/
Right Hand Touched	18700/1860	20M QPSK 1RB#0	0.669	0.420	-0.090	22.54	23.70	0.874	/
Right Hand Touched	18900/1880	20M QPSK 1RB#99	0.537	0.332	0.030	22.86	23.70	0.652	/
50%RB									
Left Hand Touched	18700/1860	20M QPSK 50%RB#0	0.307	0.182	0.150	22.45	23.00	0.348	/
Left Hand Tilted 15°	18700/1860	20M QPSK 50%RB#0	0.216	0.121	0.140	22.45	23.00	0.245	/
Right Hand Touched	18700/1860	20M QPSK 50%RB#0	0.572	0.359	-0.150	22.45	23.00	0.649	/
Right Hand Tilted 15°	18700/1860	20M QPSK 50%RB#0	0.166	0.097	0.020	22.45	23.00	0.188	/
100%RB									
Right Hand Touched	18700/1860	20M QPSK 100%RB#0	0.572	0.359	0.070	22.35	23.00	0.664	/
Tested at the worst position with battery 2#									
Right Hand Touched	18700/1860	20M QPSK 1RB#0	0.780	0.490	-0.030	22.54	23.70	1.019	/
Tested at the worst position with battery 3#									
Right Hand Touched	18700/1860	20M QPSK 1RB#0	0.795	0.499	0.140	22.54	23.70	1.038	/

Table 138: Head SAR test results of LTE Band II

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	19100/1900	20M QPSK 1RB#0	0.492	0.276	-0.170	23.31	23.70	0.538	/
Back Side	19100/1900	20M QPSK 1RB#0	0.699	0.388	0.050	23.31	23.70	0.765	/
50%RB									
Front Side	18700/1860	20M QPSK 50%RB#0	0.359	0.202	-0.040	22.45	23.00	0.407	/
Back Side	18700/1860	20M QPSK 50%RB#0	0.498	0.269	0.190	22.45	23.00	0.565	/
Tested at the worst position with battery 2#									
Back Side	19100/1900	20M QPSK 1RB#0	0.575	0.302	-0.060	23.31	23.70	0.629	/
Tested at the worst position with battery 3#									
Back Side	19100/1900	20M QPSK 1RB#0	0.770	0.425	-0.020	23.31	23.70	0.842	/
Back Side	18700/1860	20M QPSK 1RB#0	0.636	0.340	0.020	22.54	23.70	0.831	/
Back Side	18900/1880	20M QPSK 1RB#99	0.788	0.433	0.010	22.86	23.70	0.956	/
100%RB									
Back Side	18700/1860	20M QPSK 100%RB#0	0.552	0.291	-0.060	22.32	23.00	0.646	/

Table 139: Body-Worn SAR test results of LTE Band II

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	18700/1860	20M QPSK 1RB#50	0.303	0.166	-0.020	18.67	19.20	0.342	/
Back Side	18700/1860	20M QPSK 1RB#50	0.439	0.230	0.080	18.67	19.20	0.496	/
Left Side	18700/1860	20M QPSK 1RB#50	0.025	0.014	0.010	18.67	19.20	0.028	/
Right Side	18700/1860	20M QPSK 1RB#50	0.227	0.129	0.020	18.67	19.20	0.256	/
Top Side	18700/1860	20M QPSK 1RB#50	0.366	0.197	0.060	18.67	19.20	0.414	/
50%RB									
Front Side	19100/1900	20M QPSK 50%RB#0	0.230	0.126	0.000	17.52	18.50	0.288	/
Back Side	19100/1900	20M QPSK 50%RB#0	0.342	0.175	0.190	17.52	18.50	0.429	/
Left Side	19100/1900	20M QPSK 50%RB#0	0.039	0.022	-0.030	17.52	18.50	0.049	/
Right Side	19100/1900	20M QPSK 50%RB#0	0.169	0.097	0.080	17.52	18.50	0.212	/
Top Side	19100/1900	20M QPSK 50%RB#0	0.394	0.214	0.090	17.52	18.50	0.493	/
Tested at the worst position with battery 2#									
Back Side	18700/1860	20M QPSK 1RB#50	0.414	0.208	-0.030	18.67	19.20	0.468	/
Tested at the worst position with battery 3#									
Back Side	18700/1860	20M QPSK 1RB#50	0.439	0.229	0.130	18.67	19.20	0.496	/

Table 140: Hotspot SAR test results of LTE Band II

7.2.21 SAR measurement Result of LTE Band IV(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Right Hand Touched	20050/1720	20M QPSK 1RB#50	0.681	0.453	0.070	23.35	23.80	0.755	State 1
Right Hand Touched	20050/1720	20M QPSK 1RB#50	0.660	0.438	0.190	23.35	23.80	0.732	State 2
Left Hand Touched	20050/1720	20M QPSK 1RB#50	0.519	0.363	0.040	23.35	23.80	0.576	State 1
Left Hand Tilted 15°	20050/1720	20M QPSK 1RB#50	0.420	0.268	0.090	23.35	23.80	0.466	State 1
Right Hand Tilted 15°	20050/1720	20M QPSK 1RB#50	0.245	0.150	0.090	23.35	23.80	0.272	State 1
Right Hand Touched	20175/1732.5	20M QPSK 1RB#0	0.602	0.361	0.180	23.01	23.80	0.722	State 1
Right Hand Touched	20300/1745	20M QPSK 1RB#99	0.635	0.379	0.070	23.10	23.80	0.746	State 1
50%RB									
Left Hand Touched	20050/1720	20M QPSK 50%RB#25	0.384	0.242	0.090	22.28	23.00	0.453	State 1
Left Hand Tilted 15°	20050/1720	20M QPSK 50%RB#25	0.356	0.198	0.030	22.28	23.00	0.420	State 1
Right Hand Touched	20050/1720	20M QPSK 50%RB#25	0.525	0.317	0.090	22.28	23.00	0.620	State 1
Right Hand Tilted 15°	20050/1720	20M QPSK 50%RB#25	0.247	0.151	0.020	22.28	23.00	0.292	State 1
Tested at the worst position with battery 2#									
Right Hand Touched	20050/1720	20M QPSK 1RB#50	0.615	0.367	0.020	23.35	23.80	0.682	State 1
Tested at the worst position with battery 3#									
Right Hand Touched	20050/1720	20M QPSK 1RB#50	0.494	0.332	0.170	23.35	23.80	0.548	State 1

Table 141: Head SAR test results of LTE Band IV

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Back Side	20050/1720	20M QPSK 1RB#50	0.578	0.362	0.110	23.35	23.80	0.641	State 1
Back Side	20050/1720	20M QPSK 1RB#50	0.556	0.343	-0.140	23.35	23.80	0.617	State 2
Front Side	20050/1720	20M QPSK 1RB#50	0.385	0.251	0.010	23.35	23.80	0.427	State 1
50%RB									
Front Side	20050/1720	20M QPSK 50%RB#25	0.291	0.183	0.050	22.28	23.00	0.343	State 1
Back Side	20050/1720	20M QPSK 50%RB#25	0.394	0.233	0.110	22.28	23.00	0.465	State 1
Tested at the worst position with battery 2#									
Back Side	20050/1720	20M QPSK 1RB#50	0.546	0.342	0.150	23.35	23.80	0.606	State 1
Tested at the worst position with battery 3#									
Back Side	20050/1720	20M QPSK 1RB#50	0.559	0.35	0.080	23.35	23.80	0.620	State 1

Table 142: Body-Worn SAR test results of LTE Band IV

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Back Side	20050/1720	20M QPSK 1RB#50	1.060	0.605	-0.060	22.63	22.80	1.102	State 1
Back Side Repeated	20050/1720	20M QPSK 1RB#50	1.030	0.591	0.040	22.63	22.80	1.071	State 1
Back Side	20050/1720	20M QPSK 1RB#50	0.946	0.534	0.050	22.63	22.80	0.984	State 2
Front Side	20050/1720	20M QPSK 1RB#50	0.715	0.442	0.030	22.63	22.80	0.744	State 1
Back Side	20175/1732.5	20M QPSK 1RB#0	0.637	0.371	0.070	22.31	22.80	0.713	State 1
Back Side	20300/1745	20M QPSK 1RB#50	0.834	0.484	0.120	22.55	22.80	0.883	State 1
Left Side	20050/1720	20M QPSK 1RB#50	0.220	0.130	-0.170	22.63	22.80	0.229	State 1
Right Side	20050/1720	20M QPSK 1RB#50	0.312	0.183	-0.030	22.63	22.80	0.324	State 1
Bottom Side	20050/1720	20M QPSK 1RB#50	0.146	0.089	0.040	22.63	22.80	0.152	State 1
50%RB									
Front Side	20050/1720	20M QPSK 50%RB#25	0.527	0.324	-0.090	21.41	22.00	0.604	State 1
Back Side	20050/1720	20M QPSK 50%RB#25	0.665	0.388	0.000	21.41	22.00	0.762	State 1
Left Side	20050/1720	20M QPSK 50%RB#25	0.164	0.095	-0.050	21.41	22.00	0.188	State 1
Right Side	20050/1720	20M QPSK 50%RB#25	0.224	0.132	-0.040	21.41	22.00	0.257	State 1
Bottom Side	20050/1720	20M QPSK 50%RB#25	0.113	0.067	0.040	21.41	22.00	0.129	State 1
100%RB									
Back Side	20050/1720	20M QPSK 100%RB#0	0.694	0.403	0.040	21.32	22.00	0.812	State 1
Tested at the worst position with battery 2#									
Back Side	20050/1720	20M QPSK 1RB#50	0.801	0.481	0.040	22.63	22.80	0.833	State 1
Tested at the worst position with battery 3#									
Back Side	20050/1720	20M QPSK 1RB#50	0.826	0.497	0.070	22.63	22.80	0.859	State 1

Table 143: Hotspot SAR test results of LTE Band IV

7.2.22 SAR measurement Result of LTE Band V(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	20600/844	10M QPSK 1RB#25	0.283	0.213	0.090	23.57	24.00	0.312	/
Left Hand Tilted 15°	20600/844	10M QPSK 1RB#25	0.246	0.174	0.070	23.57	24.00	0.272	/
Right Hand Touched	20600/844	10M QPSK 1RB#25	0.351	0.267	0.010	23.57	24.00	0.388	/
Right Hand Tilted 15°	20600/844	10M QPSK 1RB#25	0.218	0.147	0.050	23.57	24.00	0.241	/
Right Hand Touched	20450/829	10M QPSK 1RB#25	0.284	0.197	0.120	23.49	24.00	0.319	/
Right Hand Touched	20525/836.5	10M QPSK 1RB#25	0.425	0.324	0.030	23.33	24.00	0.496	/
50%RB									
Left Hand Touched	20600/844	10M QPSK 50%RB#13	0.220	0.151	0.160	22.28	23.00	0.260	/
Left Hand Tilted 15°	20600/844	10M QPSK 50%RB#13	0.198	0.140	0.080	22.28	23.00	0.234	/
Right Hand Touched	20600/844	10M QPSK 50%RB#13	0.276	0.191	0.110	22.28	23.00	0.326	/
Right Hand Tilted 15°	20600/844	10M QPSK 50%RB#13	0.179	0.119	0.000	22.28	23.00	0.211	/
Tested at the worst position with battery 2#									
Right Hand Touched	20525/836.5	10M QPSK 1RB#25	0.286	0.216	0.090	23.33	24.00	0.334	/
Tested at the worst position with battery 3#									
Right Hand Touched	20525/836.5	10M QPSK 1RB#25	0.282	0.213	0.110	23.33	24.00	0.329	/

Table 144: Head SAR test results of LTE Band V

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.230	0.174	-0.020	23.57	24.00	0.254	/
Back Side	20600/844	10M QPSK 1RB#25	0.259	0.198	-0.050	23.57	24.00	0.286	/
50%RB									
Front Side	20600/844	10M QPSK 50%RB#13	0.184	0.129	0.050	22.28	23.00	0.217	/
Back Side	20600/844	10M QPSK 50%RB#13	0.208	0.146	0.110	22.28	23.00	0.246	/
Tested at the worst position with battery 2#									
Back Side	20600/844	10M QPSK 1RB#25	0.309	0.234	-0.010	23.57	24.00	0.341	/
Tested at the worst position with battery 3#									
Back Side	20600/844	10M QPSK 1RB#25	0.293	0.206	0.050	23.57	24.00	0.323	/

Table 145: Body-Worn SAR test results of LTE Band V

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20600/844	10M QPSK 1RB#25	0.266	0.201	0.010	23.57	24.00	0.294	/
Back Side	20600/844	10M QPSK 1RB#25	0.356	0.204	0.020	23.57	24.00	0.393	/
Left Side	20600/844	10M QPSK 1RB#25	0.105	0.070	-0.030	23.57	24.00	0.116	/
Right Side	20600/844	10M QPSK 1RB#25	0.421	0.286	-0.130	23.57	24.00	0.465	/
Bottom Side	20600/844	10M QPSK 1RB#25	0.151	0.079	0.170	23.57	24.00	0.167	/
50%RB									
Front Side	20600/844	10M QPSK 50%RB#13	0.214	0.151	0.000	22.28	23.00	0.253	/
Back Side	20600/844	10M QPSK 50%RB#13	0.303	0.191	0.030	22.28	23.00	0.358	/
Left Side	20600/844	10M QPSK 50%RB#13	0.088	0.059	-0.020	22.28	23.00	0.103	/
Right Side	20600/844	10M QPSK 50%RB#13	0.345	0.234	0.060	22.28	23.00	0.407	/
Bottom Side	20600/844	10M QPSK 50%RB#13	0.118	0.065	0.120	22.28	23.00	0.139	/
Tested at the worst position with battery 2#									
Right Side	20600/844	10M QPSK 1RB#25	0.536	0.364	0.030	23.57	24.00	0.592	/
Tested at the worst position with battery 3#									
Right Side	20600/844	10M QPSK 1RB#25	0.498	0.339	-0.030	23.57	24.00	0.550	/

Table 146: Hotspot SAR test results of LTE Band V

7.2.23 SAR measurement Result of LTE Band VII(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	21350/2560	20M QPSK 1RB#50	0.502	0.275	0.040	23.59	24.00	0.552	State 1
Left Hand Touched	21350/2560	20M QPSK 1RB#50	0.199	0.105	0.050	23.59	24.00	0.219	State 2
Left Hand Touched	21350/2560	20M QPSK 1RB#50	0.502	0.275	0.040	23.59	24.00	0.552	State 1
Left Hand Tilted 15°	21350/2560	20M QPSK 1RB#50	0.128	0.064	0.090	23.59	24.00	0.141	State 1
Right Hand Touched	21350/2560	20M QPSK 1RB#50	0.340	0.186	0.090	23.59	24.00	0.374	State 1
Right Hand Tilted 15°	21350/2560	20M QPSK 1RB#50	0.247	0.117	-0.030	23.59	24.00	0.271	State 1
Left Hand Touched	20850/2510	20M QPSK 1RB#99	0.410	0.229	0.190	23.53	24.00	0.457	State 1
Left Hand Touched	21100/2535	20M QPSK 1RB#0	0.528	0.292	-0.190	22.90	24.00	0.680	State 1
50%RB									
Left Hand Touched	20850/2510	20M QPSK 50%RB#0	0.351	0.188	-0.020	22.75	23.00	0.372	State 1
Left Hand Tilted 15°	20850/2510	20M QPSK 50%RB#0	0.121	0.062	0.060	22.75	23.00	0.128	State 1
Right Hand Touched	20850/2510	20M QPSK 50%RB#0	0.242	0.129	-0.060	22.75	23.00	0.256	State 1
Right Hand Tilted 15°	20850/2510	20M QPSK 50%RB#0	0.200	0.098	0.060	22.75	23.00	0.212	State 1
Tested at the worst position with battery 2#									
Left Hand Touched	21100/2535	20M QPSK 1RB#0	0.602	0.320	0.130	22.90	24.00	0.776	State 1
Left Hand Touched	21100/2535	20M QPSK 1RB#0	0.291	0.152	-0.060	22.90	24.00	0.375	State 2
Tested at the worst position with battery 3#									
Left Hand Touched	21100/2535	20M QPSK 1RB#0	0.520	0.273	0.170	22.90	24.00	0.670	State 1

Table 147: Head SAR test results of LTE Band VII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Back Side	21350/2560	20M QPSK 1RB#50	0.250	0.137	-0.150	23.59	24.00	0.275	State 1
Back Side	21350/2560	20M QPSK 1RB#50	0.390	0.199	-0.050	23.59	24.00	0.429	State 2
Front Side	21350/2560	20M QPSK 1RB#50	0.276	0.150	0.140	23.59	24.00	0.303	State 2
50%RB									
Front Side	20850/2510	20M QPSK 50%RB#0	0.216	0.120	0.180	22.75	23.00	0.229	State 2
Back Side	20850/2510	20M QPSK 50%RB#0	0.301	0.154	0.130	22.75	23.00	0.319	State 2
Tested at the worst position with battery 2#									
Back Side	21350/2560	20M QPSK 1RB#50	0.272	0.140	0.140	23.59	24.00	0.299	State 2
Tested at the worst position with battery 3#									
Back Side	21350/2560	20M QPSK 1RB#50	0.207	0.108	0.000	23.59	24.00	0.227	State 2

Table 148: Body-Worn SAR test results of LTE Band VII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	20850/2510	20M QPSK 1RB#0	0.182	0.097	0.070	20.66	21.00	0.197	State 1
Front Side	20850/2510	20M QPSK 1RB#0	0.300	0.137	0.050	20.66	21.00	0.324	State 2
Back Side	20850/2510	20M QPSK 1RB#0	0.356	0.172	0.000	20.66	21.00	0.385	State 2
Left Side	20850/2510	20M QPSK 1RB#0	0.019	0.011	0.060	20.66	21.00	0.020	State 2
Right Side	20850/2510	20M QPSK 1RB#0	0.264	0.134	-0.090	20.66	21.00	0.285	State 2
Bottom Side	20850/2510	20M QPSK 1RB#0	0.196	0.086	-0.100	20.66	21.00	0.212	State 2
50%RB									
Front Side	21100/2535	20M QPSK 50%RB#0	0.323	0.146	0.100	19.58	20.00	0.356	State 2
Back Side	21100/2535	20M QPSK 50%RB#0	0.402	0.180	0.060	19.58	20.00	0.443	State 2
Left Side	21100/2535	20M QPSK 50%RB#0	0.017	0.010	0.120	19.58	20.00	0.018	State 2
Right Side	21100/2535	20M QPSK 50%RB#0	0.296	0.150	-0.130	19.58	20.00	0.326	State 2
Bottom Side	21100/2535	20M QPSK 50%RB#0	0.250	0.101	-0.080	19.58	20.00	0.275	State 2
Tested at the worst position with battery 2#									
Back Side	21100/2535	20M QPSK 50%RB#0	0.503	0.208	0.150	19.58	20.00	0.554	State 2
Back Side	21100/2535	20M QPSK 50%RB#0	0.221	0.112	-0.100	19.58	20.00	0.243	State 1
Tested at the worst position with battery 3#									
Back Side	21100/2535	20M QPSK 50%RB#0	0.416	0.202	-0.050	19.58	20.00	0.458	State 2

Table 149: Hotspot SAR test results of LTE Band VII

7.2.24 SAR measurement Result of LTE Band XII(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	23130/711	10M QPSK 1RB#25	0.167	0.131	0.110	23.24	24.00	0.199	/
Left Hand Tilted 15°	23130/711	10M QPSK 1RB#25	0.133	0.086	0.000	23.24	24.00	0.158	/
Right Hand Touched	23130/711	10M QPSK 1RB#25	0.194	0.153	-0.090	23.24	24.00	0.231	/
Right Hand Tilted 15°	23130/711	10M QPSK 1RB#25	0.120	0.095	0.140	23.24	24.00	0.143	/
Right Hand Touched	23060/704	10M QPSK 1RB#49	0.238	0.187	0.110	23.04	24.00	0.297	/
Right Hand Touched	23095/707.5	10M QPSK 1RB#49	0.196	0.153	0.070	23.20	24.00	0.236	/
50%RB									
Left Hand Touched	23130/711	10M QPSK 50%RB#13	0.133	0.093	0.100	22.13	23.00	0.162	/
Left Hand Tilted 15°	23130/711	10M QPSK 50%RB#13	0.108	0.070	0.140	22.13	23.00	0.132	/
Right Hand Touched	23130/711	10M QPSK 50%RB#13	0.153	0.107	0.100	22.13	23.00	0.187	/
Right Hand Tilted 15°	23130/711	10M QPSK 50%RB#13	0.095	0.067	0.070	22.13	23.00	0.116	/
Tested at the worst position with battery 2#									
Right Hand Touched	23060/704	10M QPSK 1RB#49	0.242	0.187	-0.050	23.04	24.00	0.302	/
Tested at the worst position with battery 3#									
Right Hand Touched	23060/704	10M QPSK 1RB#49	0.238	0.185	0.190	23.04	24.00	0.297	/

Table 150: Head SAR test results of LTE Band XII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23130/711	10M QPSK 1RB#25	0.192	0.148	-0.050	23.24	24.00	0.229	/
Back Side	23130/711	10M QPSK 1RB#25	0.231	0.175	-0.030	23.24	24.00	0.275	/
50%RB									
Front Side	23130/711	10M QPSK 50%RB#13	0.154	0.110	-0.010	22.13	23.00	0.188	/
Back Side	23130/711	10M QPSK 50%RB#13	0.184	0.130	-0.030	22.13	23.00	0.225	/
Tested at the worst position with battery 2#									
Back Side	23130/711	10M QPSK 1RB#25	0.278	0.209	-0.090	23.24	24.00	0.331	/
Tested at the worst position with battery 3#									
Back Side	23130/711	10M QPSK 1RB#25	0.283	0.213	0.010	23.24	24.00	0.337	/

Table 151: Body-Worn SAR test results of LTE Band XII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23130/711	10M QPSK 1RB#25	0.242	0.184	0.090	23.24	24.00	0.288	/
Back Side	23130/711	10M QPSK 1RB#25	0.307	0.177	-0.040	23.24	24.00	0.366	/
Left Side	23130/711	10M QPSK 1RB#25	0.146	0.100	0.000	23.24	24.00	0.174	/
Right Side	23130/711	10M QPSK 1RB#25	0.309	0.216	0.020	23.24	24.00	0.368	/
Bottom Side	23130/711	10M QPSK 1RB#25	0.118	0.069	0.060	23.24	24.00	0.141	/
50%RB									
Front Side	23130/711	10M QPSK 50%RB#13	0.189	0.133	0.050	22.13	23.00	0.231	/
Back Side	23130/711	10M QPSK 50%RB#13	0.266	0.186	-0.020	22.13	23.00	0.325	/
Left Side	23130/711	10M QPSK 50%RB#13	0.119	0.082	0.110	22.13	23.00	0.145	/
Right Side	23130/711	10M QPSK 50%RB#13	0.249	0.173	0.000	22.13	23.00	0.304	/
Bottom Side	23130/711	10M QPSK 50%RB#13	0.097	0.056	0.010	22.13	23.00	0.118	/
Tested at the worst position with battery 2#									
Back Side	23130/711	10M QPSK 1RB#49	0.315	0.234	-0.010	23.24	24.00	0.375	/
Tested at the worst position with battery 3#									
Back Side	23130/711	10M QPSK 1RB#49	0.370	0.272	-0.060	23.24	24.00	0.441	/

Table 152: Hotspot SAR test results of LTE Band XII

7.2.25 SAR measurement Result of LTE Band XVII(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	23780/709	10M QPSK 1RB#49	0.128	0.090	0.150	23.75	24.00	0.136	/
Left Hand Tilted 15°	23780/709	10M QPSK 1RB#49	0.114	0.110	0.140	23.75	24.00	0.121	/
Right Hand Touched	23780/709	10M QPSK 1RB#49	0.173	0.135	0.190	23.75	24.00	0.183	/
Right Hand Tilted 15°	23780/709	10M QPSK 1RB#49	0.109	0.086	0.070	23.75	24.00	0.115	/
Right Hand Touched	23790/710	10M QPSK 1RB#49	0.171	0.133	-0.010	23.14	24.00	0.208	/
Right Hand Touched	23800/711	10M QPSK 1RB#25	0.185	0.145	0.160	23.16	24.00	0.224	/
50%RB									
Left Hand Touched	23800/711	10M QPSK 50%RB#13	0.127	0.089	0.120	22.70	23.00	0.136	/
Left Hand Tilted 15°	23800/711	10M QPSK 50%RB#13	0.102	0.072	0.040	22.70	23.00	0.109	/
Right Hand Touched	23800/711	10M QPSK 50%RB#13	0.157	0.123	0.100	22.70	23.00	0.168	/
Right Hand Tilted 15°	23800/711	10M QPSK 50%RB#13	0.097	0.068	0.100	22.70	23.00	0.104	/
Tested at the worst position with battery 2#									
Right Hand Touched	23800/711	10M QPSK 1RB#25	0.188	0.148	0.060	23.16	24.00	0.228	/
Tested at the worst position with battery 3#									
Right Hand Touched	23800/711	10M QPSK 1RB#25	0.195	0.154	0.110	23.16	24.00	0.237	/

Table 153: Head SAR test results of LTE Band XVII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23780/709	10M QPSK 1RB#49	0.161	0.115	-0.080	23.75	24.00	0.171	/
Back Side	23780/709	10M QPSK 1RB#49	0.197	0.150	0.130	23.75	24.00	0.209	/
50%RB									
Front Side	23800/711	10M QPSK 50%RB#13	0.150	0.106	-0.110	22.70	23.00	0.161	/
Back Side	23800/711	10M QPSK 50%RB#13	0.175	0.124	-0.020	22.70	23.00	0.188	/
Tested at the worst position with battery 2#									
Back Side	23780/709	10M QPSK 1RB#49	0.254	0.191	0.030	23.75	24.00	0.269	/
Tested at the worst position with battery 3#									
Back Side	23780/709	10M QPSK 1RB#49	0.269	0.203	-0.020	23.75	24.00	0.285	/

Table 154: Body-Worn SAR test results of LTE Band XVII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	23780/709	10M QPSK 1RB#49	0.274	0.208	-0.040	23.75	24.00	0.290	/
Back Side	23780/709	10M QPSK 1RB#49	0.368	0.213	0.010	23.75	24.00	0.390	/
Left Side	23780/709	10M QPSK 1RB#49	0.186	0.127	-0.030	23.75	24.00	0.197	/
Right Side	23780/709	10M QPSK 1RB#49	0.361	0.252	-0.050	23.75	24.00	0.382	/
Bottom Side	23780/709	10M QPSK 1RB#49	0.133	0.078	0.040	23.75	24.00	0.141	/
50%RB									
Front Side	23800/711	10M QPSK 50%RB#13	0.198	0.140	0.020	22.70	23.00	0.212	/
Back Side	23800/711	10M QPSK 50%RB#13	0.271	0.157	-0.020	22.70	23.00	0.290	/
Left Side	23800/711	10M QPSK 50%RB#13	0.126	0.086	-0.020	22.70	23.00	0.135	/
Right Side	23800/711	10M QPSK 50%RB#13	0.263	0.181	0.000	22.70	23.00	0.282	/
Bottom Side	23800/711	10M QPSK 50%RB#13	0.097	0.057	0.000	22.70	23.00	0.104	/
Tested at the worst position with battery 2#									
Back Side	23780/709	10M QPSK 1RB#49	0.298	0.173	-0.040	23.75	24.00	0.316	/
Tested at the worst position with battery 3#									
Back Side	23780/709	10M QPSK 1RB#49	0.350	0.258	-0.020	23.75	24.00	0.371	/

Table 155: Hotspot SAR test results of LTE Band XVII

7.2.26 SAR measurement Result of LTE Band XXVI(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	26865/831.5	15M QPSK 1RB#38	0.201	0.151	0.160	23.90	24.50	0.231	/
Left Hand Tilted 15°	26865/831.5	15M QPSK 1RB#38	0.176	0.119	0.050	23.90	24.50	0.202	/
Right Hand Touched	26865/831.5	15M QPSK 1RB#38	0.256	0.196	0.070	23.90	24.50	0.294	/
Right Hand Tilted 15°	26865/831.5	15M QPSK 1RB#38	0.159	0.107	0.100	23.90	24.50	0.183	/
Right Hand Touched	26775/822.5	15M QPSK 1RB#38	0.154	0.106	0.130	23.87	24.50	0.178	/
Right Hand Touched	26965/841.5	15M QPSK 1RB#38	0.368	0.282	0.080	23.89	24.50	0.423	/
50%RB									
Left Hand Touched	26865/831.5	15M QPSK 50%RB#18	0.157	0.109	0.180	22.76	23.00	0.166	/
Left Hand Tilted 15°	26865/831.5	15M QPSK 50%RB#18	0.148	0.100	0.030	22.76	23.00	0.156	/
Right Hand Touched	26865/831.5	15M QPSK 50%RB#18	0.206	0.142	0.160	22.76	23.00	0.218	/
Right Hand Tilted 15°	26865/831.5	15M QPSK 50%RB#18	0.134	0.090	0.050	22.76	23.00	0.142	/
Tested at the worst position with battery 2#									
Right Hand Touched	26965/841.5	15M QPSK 1RB#38	0.358	0.273	-0.110	23.89	24.50	0.412	/
Tested at the worst position with battery 3#									
Right Hand Touched	26965/841.5	15M QPSK 1RB#38	0.373	0.284	0.010	23.89	24.50	0.429	/

Table 156: Head SAR test results of LTE Band XXVI

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	26865/831.5	15M QPSK 1RB#38	0.272	0.207	-0.100	23.90	24.50	0.312	/
Back Side	26865/831.5	15M QPSK 1RB#38	0.343	0.262	0.020	23.90	24.50	0.394	/
50%RB									
Front Side	26865/831.5	15M QPSK 50%RB#18	0.207	0.146	0.000	22.76	23.50	0.245	/
Back Side	26865/831.5	15M QPSK 50%RB#18	0.266	0.203	-0.050	22.76	23.50	0.315	/
Tested at the worst position with battery 2#									
Back Side	26865/831.5	15M QPSK 1RB#38	0.365	0.278	-0.140	23.90	24.50	0.419	/
Tested at the worst position with battery 3#									
Back Side	26865/831.5	15M QPSK 1RB#38	0.267	0.188	0.050	23.90	24.50	0.307	/

Table 157: Body-Worn SAR test results of LTE Band XXVI

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducte d Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Front Side	26865/831.5	15M QPSK 1RB#38	0.295	0.174	-0.110	23.90	24.50	0.339	/
Back Side	26865/831.5	15M QPSK 1RB#38	0.497	0.282	-0.080	23.90	24.50	0.571	/
Left Side	26865/831.5	15M QPSK 1RB#38	0.157	0.106	-0.160	23.90	24.50	0.180	/
Right Side	26865/831.5	15M QPSK 1RB#38	0.627	0.424	-0.120	23.90	24.50	0.720	/
Bottom Side	26865/831.5	15M QPSK 1RB#38	0.226	0.130	-0.010	23.90	24.50	0.259	/
50%RB									
Front Side	26865/831.5	15M QPSK 50%RB#18	0.240	0.169	-0.050	22.76	23.50	0.285	/
Back Side	26865/831.5	15M QPSK 50%RB#18	0.364	0.242	0.030	22.76	23.50	0.432	/
Left Side	26865/831.5	15M QPSK 50%RB#18	0.124	0.084	0.060	22.76	23.50	0.147	/
Right Side	26865/831.5	15M QPSK 50%RB#18	0.403	0.274	-0.040	22.76	23.50	0.478	/
Bottom Side	26865/831.5	15M QPSK 50%RB#18	0.172	0.099	0.010	22.76	23.50	0.204	/
Tested at the worst position with battery 2#									
Right Side	26865/831.5	15M QPSK 1RB#38	0.409	0.275	-0.050	23.90	24.50	0.470	/
Tested at the worst position with battery 3#									
Right Side	26865/831.5	15M QPSK 1RB#38	0.429	0.288	-0.090	23.90	24.50	0.493	/

Table 158: Hotspot SAR test results of LTE Band XXVI

7.2.27 SAR measurement Result of LTE Band XXXVIII(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	38150/2610	20M QPSK 1RB#50	0.316	0.169	0.160	23.28	24.00	0.373	State 1
Left Hand Touched	38150/2610	20M QPSK 1RB#50	0.348	0.185	-0.050	23.28	24.00	0.411	State 2
Left Hand Touched	38000/2595	20M QPSK 1RB#50	0.162	0.090	0.090	23.95	24.00	0.164	State 2
Left Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.094	0.044	0.030	23.95	24.00	0.095	State 2
Right Hand Touched	38000/2595	20M QPSK 1RB#50	0.296	0.157	0.050	23.95	24.00	0.299	State 2
Right Hand Tilted 15°	38000/2595	20M QPSK 1RB#50	0.057	0.032	0.030	23.95	24.00	0.057	State 2
Right Hand Touched	37850/2580	20M QPSK 1RB#50	0.292	0.156	-0.070	23.54	24.00	0.325	State 2
Right Hand Touched	38150/2610	20M QPSK 1RB#50	0.348	0.185	-0.050	23.28	24.00	0.411	State 2
50%RB									
Left Hand Touched	38000/2595	20M QPSK 50%RB#25	0.126	0.066	0.050	22.60	23.00	0.138	State 2
Left Hand Tilted 15°	38000/2595	20M QPSK 50%RB#25	0.071	0.034	0.070	22.60	23.00	0.078	State 2
Right Hand Touched	38000/2595	20M QPSK 50%RB#25	0.229	0.119	0.120	22.60	23.00	0.251	State 2
Right Hand Tilted 15°	38000/2595	20M QPSK 50%RB#25	0.043	0.023	0.040	22.60	23.00	0.047	State 2
Tested at the worst position with battery 2#									
Right Hand Touched	38150/2610	20M QPSK 1RB#50	0.205	0.105	0.190	23.28	24.00	0.242	State 2
Tested at the worst position with battery 3#									
Right Hand Touched	38150/2610	20M QPSK 1RB#50	0.208	0.107	0.000	23.28	24.00	0.246	State 2

Table 159: Head SAR test results of LTE Band XXXVIII

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Back Side	38000/2595	20M QPSK 1RB#50	0.196	0.101	0.040	23.95	24.00	0.198	State 1
Back Side	38000/2595	20M QPSK 1RB#50	0.250	0.127	-0.170	23.95	24.00	0.253	State 2
Front Side	38000/2595	20M QPSK 1RB#50	0.200	0.108	-0.050	23.95	24.00	0.202	State 2
50%RB									
Front Side	38000/2595	20M QPSK 50%RB#25	0.156	0.084	-0.010	22.60	23.00	0.171	State 2
Back Side	38000/2595	20M QPSK 50%RB#25	0.186	0.096	0.110	22.60	23.00	0.204	State 2
Tested at the worst position with battery 2#									
Back Side	38000/2595	20M QPSK 1RB#50	0.151	0.077	0.090	23.95	24.00	0.153	State 2
Tested at the worst position with battery 3#									
Back Side	38000/2595	20M QPSK 1RB#50	0.127	0.064	0.020	23.95	24.00	0.128	State 2

Table 160: Body-Worn SAR test results of LTE Band XXXVIII

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Back Side	38000/2595	20M QPSK 1RB#50	0.553	0.267	0.120	23.95	24.00	0.559	State 1
Back Side	38000/2595	20M QPSK 1RB#50	0.638	0.272	0.170	23.95	24.00	0.645	State 2
Front Side	38000/2595	20M QPSK 1RB#50	0.466	0.240	0.000	23.95	24.00	0.471	State 2
Left Side	38000/2595	20M QPSK 1RB#50	0.019	0.011	0.090	23.95	24.00	0.020	State 2
Right Side	38000/2595	20M QPSK 1RB#50	0.489	0.247	-0.140	23.95	24.00	0.495	State 2
Bottom Side	38000/2595	20M QPSK 1RB#50	0.364	0.146	-0.160	23.95	24.00	0.368	State 2
50%RB									
Front Side	38000/2595	20M QPSK 50%RB#25	0.340	0.180	0.010	22.60	23.00	0.373	State 2
Back Side	38000/2595	20M QPSK 50%RB#25	0.487	0.242	0.100	22.60	23.00	0.534	State 2
Left Side	38000/2595	20M QPSK 50%RB#25	0.016	0.009	0.000	22.60	23.00	0.017	State 2
Right Side	38000/2595	20M QPSK 50%RB#25	0.315	0.160	0.100	22.60	23.00	0.345	State 2
Bottom Side	38000/2595	20M QPSK 50%RB#25	0.245	0.100	-0.130	22.60	23.00	0.269	State 2
Tested at the worst position with battery 2#									
Back Side	38000/2595	20M QPSK 1RB#50	0.394	0.218	-0.060	23.95	24.00	0.399	State 2
Tested at the worst position with battery 3#									
Back Side	38000/2595	20M QPSK 1RB#50	0.347	0.183	0.160	23.95	24.00	0.351	State 2

Table 161: Hotspot SAR test results of LTE Band XXXVIII

7.2.28 SAR measurement Result of LTE Band XLI(Main Antenna)

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Left Hand Touched	41140/2645	20M QPSK 1RB#50	0.203	0.109	0.090	23.72	24.00	0.217	State 2
Left Hand Tilted 15°	41140/2645	20M QPSK 1RB#50	0.143	0.068	0.160	23.72	24.00	0.153	State 2
Right Hand Touched	41140/2645	20M QPSK 1RB#50	0.342	0.182	-0.130	23.72	24.00	0.365	State 2
Right Hand Touched	40340/2565	20M QPSK 1RB#50	0.340	0.182	-0.040	23.52	24.00	0.380	State 1
Right Hand Touched	40340/2565	20M QPSK 1RB#50	0.397	0.215	0.010	23.52	24.00	0.443	State 2
Right Hand Touched	40740/2605	20M QPSK 1RB#50	0.367	0.198	-0.190	23.62	24.00	0.401	State 2
Right Hand Tilted 15°	41140/2645	20M QPSK 1RB#50	0.069	0.035	-0.060	23.72	24.00	0.074	State 2
50%RB									
Left Hand Touched	41140/2645	20M QPSK 50%RB#0	0.153	0.079	0.120	21.83	23.00	0.200	State 2
Left Hand Tilted 15°	41140/2645	20M QPSK 50%RB#0	0.110	0.052	0.160	21.83	23.00	0.144	State 2
Right Hand Touched	41140/2645	20M QPSK 50%RB#0	0.251	0.133	0.000	21.83	23.00	0.329	State 2
Right Hand Tilted 15°	41140/2645	20M QPSK 50%RB#0	0.060	0.031	0.120	21.83	23.00	0.078	State 2
Tested at the worst position with battery 2#									
Right Hand Touched	40340/2565	20M QPSK 1RB#50	0.258	0.134	0.070	23.52	24.00	0.288	State 2
Tested at the worst position with battery 3#									
Right Hand Touched	40340/2565	20M QPSK 1RB#50	0.236	0.122	-0.050	23.52	24.00	0.264	State 2

Table 162: Head SAR test results of LTE Band XLI

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Back Side	41140/2645	20M QPSK 1RB#50	0.211	0.108	-0.180	23.72	24.00	0.225	State 1
Back Side	41140/2645	20M QPSK 1RB#50	0.242	0.122	0.050	23.72	24.00	0.258	State 2
Front Side	41140/2645	20M QPSK 1RB#50	0.161	0.086	0.030	23.72	24.00	0.172	State 2
50%RB									
Front Side	41140/2645	20M QPSK 50%RB#0	0.117	0.062	0.120	21.83	23.00	0.153	State 2
Back Side	41140/2645	20M QPSK 50%RB#0	0.159	0.080	0.080	21.83	23.00	0.208	State 2
Tested at the worst position with battery 2#									
Back Side	41140/2645	20M QPSK 1RB#50	0.171	0.092	-0.010	23.72	24.00	0.182	State 2
Tested at the worst position with battery 3#									
Back Side	41140/2645	20M QPSK 1RB#50	0.168	0.088	-0.090	23.72	24.00	0.179	State 2

Table 163: Body-Worn SAR test results of LTE Band XLI

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g	10-g					
Test data with battery 1#									
1RB									
Back Side	41140/2645	20M QPSK 1RB#50	0.470	0.226	0.170	23.72	24.00	0.501	State 1
Back Side	41140/2645	20M QPSK 1RB#50	0.685	0.294	0.160	23.72	24.00	0.731	State 2
Front Side	41140/2645	20M QPSK 1RB#50	0.512	0.263	-0.080	23.72	24.00	0.546	State 2
Left Side	41140/2645	20M QPSK 1RB#50	0.021	0.012	-0.010	23.72	24.00	0.022	State 2
Right Side	41140/2645	20M QPSK 1RB#50	0.485	0.242	0.110	23.72	24.00	0.517	State 2
Bottom Side	41140/2645	20M QPSK 1RB#50	0.306	0.128	0.130	23.72	24.00	0.326	State 2
50%RB									
Front Side	41140/2645	20M QPSK 50%RB#0	0.414	0.204	-0.080	21.83	23.00	0.542	State 2
Back Side	41140/2645	20M QPSK 50%RB#0	0.488	0.264	0.130	21.83	23.00	0.639	State 2
Left Side	41140/2645	20M QPSK 50%RB#0	0.015	0.009	0.190	21.83	23.00	0.019	State 2
Right Side	41140/2645	20M QPSK 50%RB#0	0.382	0.191	0.150	21.83	23.00	0.500	State 2
Bottom Side	41140/2645	20M QPSK 50%RB#0	0.244	0.102	0.180	21.83	23.00	0.319	State 2
Tested at the worst position with battery 2#									
Back Side	41140/2645	20M QPSK 1RB#50	0.421	0.168	0.110	23.72	24.00	0.449	State 2
Tested at the worst position with battery 3#									
Back Side	41140/2645	20M QPSK 1RB#50	0.402	0.162	0.150	23.72	24.00	0.429	State 2

Table 164: Hotspot SAR test results of LTE Band XLI

7.2.29 SAR measurement Result of WiFi 2.4G

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g Area Scan	1-g Zoom Scan					
Test data with battery 1#									
Left Hand Touched	11/2462	802.11 b	0.879	0.985	0.100	16.21	17.50	1.326	/
Left Hand Touched	6/2437	802.11 b	0.760	0.757	0.040	15.69	17.50	1.148	/
Left Hand Tilted 15°	11/2462	802.11 b	0.796	0.842	0.130	16.21	17.50	1.133	/
Left Hand Tilted 15°	6/2437	802.11 b	0.553	0.536	0.110	15.69	17.50	0.813	/
Right Hand Touched	11/2462	802.11 b	0.222	0.229	0.180	16.21	17.50	0.308	/
Right Hand Tilted 15°	11/2462	802.11 b	0.256	0.272	0.000	16.21	17.50	0.366	/
Tested at the worst position with battery 2#									
Left Hand Touched	11/2462	802.11 b	1.170	0.965	-0.080	16.21	17.50	1.299	/
Tested at the worst position with battery 3#									
Left Hand Touched	11/2462	802.11 b	0.989	1.070	0.080	16.21	17.50	1.440	/
Left Hand Touched-Repeated	11/2462	802.11 b	1.300	1.050	-0.040	16.21	17.50	1.413	/
Additional SAR test(simultaneous transmission with 2G&3G&4G antenna)									
Left Hand Touched	11/2462	802.11 b	0.606	0.637	0.140	14.08	15.00	0.787	/
Left Hand Tilted 15°	11/2462	802.11 b	0.684	0.685	0.150	14.08	15.00	0.847	/
Left Hand Tilted 15°	6/2437	802.11 b	0.597	0.606	0.040	13.63	15.00	0.831	/
Right Hand Touched	11/2462	802.11 b	0.147	0.152	0.110	14.08	15.00	0.188	/
Right Hand Tilted 15°	11/2462	802.11 b	0.174	0.182	0.160	14.08	15.00	0.225	/

Table 165: Head SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	17.5	56.23	1.440	/	Yes
802.11g	15.5	35.48	/	0.909	No
802.11n 20M	15.0	31.62	/	0.810	No
802.11n 40M	14.0	25.12	/	0.643	No

Note: Per KDB248227D01, for Head SAR test of WiFi 2.4G,

- SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure.
- As the highest reported SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g Area Scan	1-g Zoom Scan					
Test data with battery 1#									
Front Side	11/2462	802.11 b	0.062	0.066	0.050	16.21	17.50	0.089	/
Back Side	11/2462	802.11 b	0.052	0.055	0.030	16.21	17.50	0.074	/
Tested at the worst position with battery 2#									
Front Side	11/2462	802.11 b	0.094	0.098	0.020	16.21	17.50	0.132	/
Tested at the worst position with battery 3#									
Front Side	11/2462	802.11 b	0.120	0.122	-0.160	16.21	17.50	0.164	/

Table 166: Body-Worn SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	17.5	56.23	0.164	/	Yes
802.11g	15.5	35.48	/	0.103	No
802.11n 20M	15.0	31.62	/	0.092	No
802.11n 40M	14.0	25.12	/	0.073	No

Note: Per KDB248227D01, for Body-worn SAR test of WiFi 2.4G:

- 1) SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure.
- 2) As the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g Area Scan	1-g Zoom Scan					
Test data with battery 1#									
Front Side	11/2462	802.11 b	0.116	0.120	-0.060	16.21	17.50	0.162	/
Back Side	11/2462	802.11 b	0.055	0.100	-0.180	16.21	17.50	0.135	/
Right Side	11/2462	802.11 b	0.162	0.163	0.030	16.21	17.50	0.219	/
Top Side	11/2462	802.11 b	0.061	0.075	0.180	16.21	17.50	0.101	/
Tested at the worst position with battery 2#									
Right Side	11/2462	802.11 b	0.228	0.231	-0.150	16.21	17.50	0.311	/
Tested at the worst position with battery 3#									
Right Side	11/2462	802.11 b	0.289	0.273	-0.070	16.21	17.50	0.367	/

Table 167: Hotspot SAR test results of WiFi 2.4G

Mode	Tune-up (dBm)	Tune-up (mW)	Highest Reported SAR(W/kg)	Adjusted SAR (W/kg)	SAR test
802.11b	17.5	56.23	0.367	/	Yes
802.11g	15.5	35.48	/	0.232	No
802.11n 20M	15.0	31.62	/	0.206	No
802.11n 40M	14.0	25.12	/	0.164	No

Note: Per KDB248227D01, for Hotspot SAR test of WiFi 2.4G:

- 1) SAR is measured for 2.4 GHz 802.11b DSSS using the initial test position procedure.
- 2) As the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM 802.11g/n to DSSS specified maximum output power and the adjusted SAR is < 1.2 W/kg, so SAR for 802.11g/n is not required.

7.2.30 SAR measurement Result of WiFi 5G

Test Position of Head	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g Area Scan	1-g Zoom Scan					
Test data with battery 1#									
5.3G U-NII-2A Band (802.11a)									
Left Hand Touched	52/5260	802.11a	0.847	0.949	0.070	14.58	16.00	1.316	/
Left Hand Touched	56/5280	802.11a	0.873	1.020	-0.090	14.43	16.00	1.464	/
Left Hand Touched	60/5300	802.11a	0.795	0.937	-0.160	14.16	16.00	1.431	/
Left Hand Touched	64/5320	802.11a	0.817	0.975	0.070	14.24	16.00	1.462	/
Left Hand Tilted 15°	52/5260	802.11a	0.615	0.736	0.180	14.58	16.00	1.021	/
Left Hand Tilted 15°	56/5280	802.11a	0.747	0.799	0.190	14.43	16.00	1.147	/
Right Hand Touched	52/5260	802.11a	0.373	0.407	0.090	14.58	16.00	0.564	/
Right Hand Tilted 15°	52/5260	802.11a	0.375	0.395	0.090	14.58	16.00	0.548	/
5.2G U-NII-1 Band (802.11a)									
Left Hand Touched	36/5180	802.11a	0.637	0.774	0.040	14.91	16.00	0.995	/
Left Hand Touched	40/5200	802.11a	0.690	0.824	0.030	14.88	16.00	1.066	/
Left Hand Tilted 15°	36/5180	802.11a	0.545	0.596	0.160	14.91	16.00	0.766	/
Right Hand Touched	36/5180	802.11a	0.305	0.334	0.060	14.91	16.00	0.429	/
Right Hand Tilted 15°	36/5180	802.11a	0.245	0.277	0.030	14.91	16.00	0.356	/
5.5G U-NII-2C Band (802.11n 40M)									
Left Hand Touched	110/5550	802.11n	0.696	0.789	0.090	12.93	14.00	1.009	/
Left Hand Touched	102/5510	802.11n	0.377	0.481	0.140	12.78	14.00	0.637	/
Left Hand Tilted 15°	110/5550	802.11n	0.556	0.715	0.150	12.93	14.00	0.915	/
Left Hand Tilted 15°	102/5510	802.11n	0.300	0.387	0.080	12.78	14.00	0.513	/
Right Hand Touched	110/5550	802.11n	0.323	0.376	-0.190	12.93	14.00	0.481	/
Right Hand Tilted 15°	110/5550	802.11n	0.279	0.323	0.050	12.93	14.00	0.413	/

5.8G U-NII-3 Band (802.11a)									
Left Hand Touched	157/5785	802.11a	0.796	0.999	0.180	14.41	14.50	1.020	/
Left Hand Touched	149/5745	802.11a	0.871	1.120	0.040	14.39	14.50	1.149	/
Left Hand Touched-Repeated	149/5745	802.11a	0.844	1.110	-0.050	14.39	14.50	1.138	/
Left Hand Tilted 15°	157/5785	802.11a	0.569	0.755	0.070	14.41	14.50	0.771	/
Right Hand Touched	157/5785	802.11a	0.423	0.480	-0.190	14.41	14.50	0.490	/
Right Hand Tilted 15°	157/5785	802.11a	0.438	0.500	0.040	14.41	14.50	0.510	/
Tested at the worst position with battery 2#									
Left Hand Touched	56/5280	802.11a	0.446	0.525	-0.020	14.43	16.00	0.754	/
Tested at the worst position with battery 3#									
Left Hand Touched	56/5280	802.11a	0.437	0.534	0.190	14.43	16.00	0.767	/
Additional SAR test(simultaneous transmission with 2G&3G&4G antenna)									
5.3G U-NII-2A Band (802.11a)									
Left Hand Touched	52/5260	802.11a	0.393	0.457	0.040	11.95	13.50	0.653	/
Left Hand Tilted 15°	52/5260	802.11a	0.329	0.386	0.050	11.95	13.50	0.552	/
Right Hand Touched	52/5260	802.11a	0.201	0.195	0.020	11.95	13.50	0.279	/
Right Hand Tilted 15°	52/5260	802.11a	0.181	0.204	-0.140	11.95	13.50	0.291	/
5.5G U-NII-2C Band (802.11n 40M)									
Left Hand Touched	110/5550	802.11n	0.439	0.528	0.040	10.58	11.50	0.653	/
Left Hand Tilted 15°	110/5550	802.11n	0.316	0.427	0.040	10.58	11.50	0.528	/
Right Hand Touched	110/5550	802.11n	0.231	0.244	0.070	10.58	11.50	0.302	/
Right Hand Tilted 15°	110/5550	802.11n	0.202	0.220	0.080	10.58	11.50	0.272	/
5.8G U-NII-3 Band (802.11a)									
Left Hand Touched	157/5785	802.11a	0.410	0.530	0.070	11.95	12.00	0.536	/
Left Hand Tilted 15°	157/5785	802.11a	0.319	0.433	0.090	11.95	12.00	0.438	/
Right Hand Touched	157/5785	802.11a	0.199	0.235	0.070	11.95	12.00	0.238	/
Right Hand Tilted 15°	157/5785	802.11a	0.214	0.225	0.060	11.95	12.00	0.228	/

Table 168: Head SAR test results of WiFi 5G

Note: Per KDB248227D01, for Head SAR test of WiFi 5G:

1) For the full power level scenario,

a) For WiFi 5G U-NII-1, U-NII-2A and U-NII-3 bands, the 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

b) For U-NII-2C band, the 802.11n 40M is selected as Initial Test Configuration for SAR test according to the specified maximum output power and largest channel bandwidth. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

c) For WiFi 5G U-NII-1 and U-NII-2A bands, as the same maximum output power is specified for the bands, begin SAR measurement in the U-NII-2A band by applying the OFDM SAR requirements. As the highest *reported* SAR is > 1.2 W/kg, SAR is required for the U-NII-1 band.

2) For additional simultaneous transmission power reduction scenario,

a) For WiFi 5G U-NII-1, U-NII-2A and U-NII-3 bands, the 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

b) For U-NII-2C band, the 802.11n 40M is selected as Initial Test Configuration for SAR test according to the specified maximum output power and largest channel bandwidth. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

c) For WiFi 5G U-NII-1 and U-NII-2A bands, as the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest *reported* SAR is < 1.2 W/kg, SAR is not required for the U-NII-1 band.

Test Position of Body-Worn with 15mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g Area Scan	1-g Zoom Scan					
Test data with battery 1#									
5.3G U-NII-2A band (802.11a)									
Front Side	52/5260	802.11a	0.072	0.069	-0.040	14.58	16.00	0.095	/
Back Side	52/5260	802.11a	0.060	/	-0.020	14.58	16.00	/	/
5.5G U-NII-2C band (802.11n 40M)									
Front Side	110/5550	802.11n	0.094	0.083	0.140	12.93	14.00	0.107	/
Back Side	110/5550	802.11n	0.081	/	-0.060	12.93	14.00	/	/
5.8G U-NII-3 band (802.11a)									
Front Side	157/5785	802.11a	0.125	0.126	-0.180	14.41	14.50	0.129	/
Back Side	157/5785	802.11a	0.103	/	-0.150	14.41	14.50	/	/
Tested at the worst position with battery 2#									
Front Side	157/5785	802.11a	0.102	/	0.050	14.41	14.50	/	/
Tested at the worst position with battery 3#									
Front Side	157/5785	802.11a	0.099	/	0.000	14.41	14.50	/	/

Table 169: Body-Worn SAR test results of WiFi 5G

Note: Per KDB248227D01, for Body-Worn SAR test of WiFi 5G:

- 1) For WiFi 5G U-NII-1, U-NII-2A and U-NII-3 bands, the 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 2) For U-NII-2C band, the 802.11n 40M is selected as Initial Test Configuration for SAR test according to the specified maximum output power and largest channel bandwidth. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.
- 3) For WiFi 5G U-NII-1 and U-NII-2A bands, as the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR is < 1.2 W/kg, SAR is not required for the U-NII-1 band.

Test Position of Hotspot with 10mm	Test channel / Freq.(MHz)	Test Mode	SAR Value (W/kg)		Power Drift (dB)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR _{1-g} (W/kg)	Ant Tuning State
			1-g Area Scan	1-g Zoom Scan					
Test data with battery 1#									
5.2G U-NII-1 band (802.11a)									
Front Side	36/5180	802.11a	0.088	/	-0.010	14.91	16.00	/	/
Back Side	36/5180	802.11a	0.089	/	-0.060	14.91	16.00	/	/
Right Side	36/5180	802.11a	0.129	0.136	-0.140	14.91	16.00	0.175	/
Top Side	36/5180	802.11a	0.046	/	-0.060	14.91	16.00	/	/
5.8G U-NII-3 band (802.11a)									
Front Side	157/5785	802.11a	0.208	/	0.130	14.41	14.50	/	/
Back Side	157/5785	802.11a	0.150	/	0.090	14.41	14.50	/	/
Right Side	157/5785	802.11a	0.248	0.266	0.010	14.41	14.50	0.272	/
Top Side	157/5785	802.11a	0.092	/	-0.070	14.41	14.50	/	/
Tested at the worst position with battery 2#									
Right Side	157/5785	802.11a	0.168	/	-0.080	14.41	14.50	/	/
Tested at the worst position with battery 3#									
Right Side	157/5785	802.11a	0.184	/	-0.120	14.41	14.50	/	/

Table 170: Hotspot SAR test results of WiFi 5G(5.2G&5.8G)


Note : For Hotspot SAR test of WiFi 5G:

- 1) As WiFi 5G hotspot is only supported for U-NII-1(5.2G) and U-NII-3 (5.8G) bands, therefore U-NII-2A (5.3G) and U-NII-2C(5.5G) were not evaluated for hotspot condition.
- 2) For U-NII-1(5.2G) and U-NII-3 (5.8G) bands, the 802.11a mode is selected as Initial Test Configuration for SAR test according to the specified maximum output power. As the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

7.3 Multiple Transmitter Evaluation

The following tables list information which is relevant for the decision if a simultaneous transmit evaluation is necessary according to FCC KDB 447498D01 General RF Exposure Guidance v06.

The location of the antennas inside the device is shown as below picture:

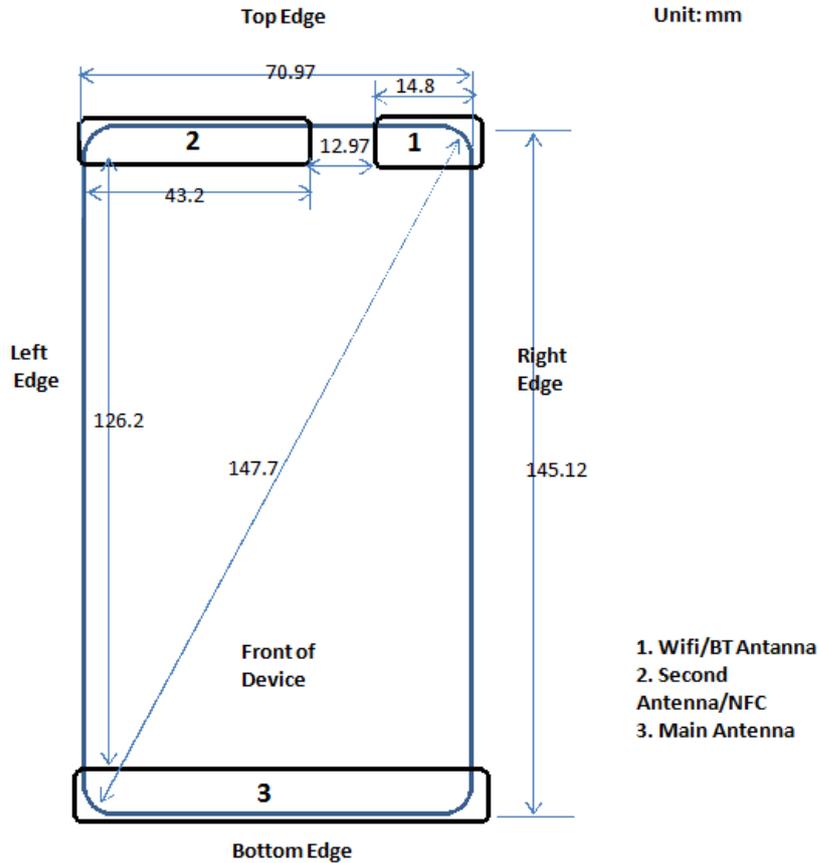

Note:

- 1) The device has two 2G/3G/4G Tx antennas (Main Antenna and Second Antenna). It can transmit from either Main Antenna or Second Antenna, but they can not transmit simultaneously.
- 2) Per KDB 648474 D04, Phones with built-in NFC functions do not require separate SAR testing and can generally be tested according to the SAR measurement procedures normally required for the phone. Influences of the hardware introduced by the built-in NFC functions are inherently considered through testing of the other transmitters that require SAR.
- 3) Per KDB 941225 D06, particular DUT edges were not required to be evaluated for Hotspot SAR if the antenna-to-edge distance is greater than 2.5cm.

Mode	Exposure Condition	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
Main antenna	Hotspot	Yes	Yes	Yes	Yes	No	Yes
Second antenna	Hotspot	Yes	Yes	Yes	No	Yes	No
WiFi/BT antenna	Hotspot	Yes	Yes	No	Yes	Yes	No

Table 171: Sides for Hotspot SAR testing

7.3.1 Stand-alone SAR test exclusion

Per FCC KDB 447498D01v06:

1) the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
BT	Body-Worn	13.00	19.95	15	2.450	2.08	3.00	Yes

Table 172: Standalone SAR test exclusion for BT

Note:

- 1)* - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth for this device.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

Mode	Position	P_{max} (dBm)*	P_{max} (mW)	Distance (mm)	f (GHz)	X	Estimated SAR (W/Kg)*
BT	Body-worn	13.00	19.95	15	2.450	7.50	0.278

Table 173: Estimated SAR calculation for BT

Note:

- 1) * - maximum possible output power declared by manufacturer
- 2) Held to ear configurations are not applicable to Bluetooth and therefore were not considered for simultaneous transmission.

7.3.2 Simultaneous Transmission Possibilities

The Simultaneous Transmission Possibilities of this device are as below:

No.	Configuration	Head	Body-worn	Hotspot
1	GSM (Voice) + WiFi 2.4G	Yes	Yes	N/A
2	GPRS/EDGE (DATA) + WiFi 2.4G	N/A	N/A	Yes
3	GSM (Voice) + WiFi 5G	Yes	Yes	N/A
4	GPRS/EDGE (DATA) + WiFi 5G	N/A	N/A	N/A
5	GSM (Voice) +BT	N/A	Yes	N/A
6	GPRS/EDGE (DATA) + BT	N/A	N/A	N/A
7	UMTS (Voice) + WiFi 2.4G	Yes	Yes	N/A
8	UMTS (DATA) + WiFi 2.4G	N/A	Yes	Yes
9	UMTS (Voice) + WiFi 5G	Yes	Yes	N/A
10	UMTS (DATA) + WiFi 5G	N/A	Yes	N/A
11	UMTS (Voice)+BT	N/A	Yes	N/A
12	UMTS (DATA) +BT	N/A	Yes	N/A
13	LTE (DATA)* + WiFi 2.4G	Yes	Yes	Yes
14	LTE (DATA)* + WiFi 5G	Yes	Yes	N/A
15	LTE (DATA)* + BT	N/A	Yes	N/A

Table 174: Simultaneous Transmission Possibilities

Note:

- 1) The device can transmit from either 2G&3G&4G Main antenna or 2G&3G&4G Second antenna, but Main antenna and Second antenna can't transmit simutanously,
- 2) WiFi 2.4G and WiFi 5G can't transmit simutanously.
- 3) WiFi 2.4G/5G and BT can't transmit simutanously.
- 4) WiFi 5G hotspot is only supported for U-NII-1 and U-NII-3 bands, therefore U-NII-2A and U-NII-2C were not evaluated for hotspot condition.
- 5) The device does not support GSM DTM function. Body-worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
- 6) Held to ear configurations are not applicable to Bluetooth for this device.
- 7)* VOIP 3rd party applications may possibly be installed and used by the user.

7.3.3 SAR Summation Scenario

The yellow color SAR test data in the following summed SAR tables represent that the additional SAR test results in simultaneous transmission fixed power reduction scenario are used to ensure simultaneous transmission SAR test exclusion. For the other SAR test data in the summed SAR tables, the more conservative SAR test results at the maximum output power level without any simultaneous transmission power reduction are used.

Test Position		Second antenna SAR _{Max}														WiFi/BT antenna SAR _{Max}		Σ1-g SAR (1.6W/kg Limit)	SPLSR	
		GSM850	GSM1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE Band II	LTE Band IV	LTE Band V	LTE Band VII	LTE Band XII	LTE Band XVII	LTE Band XXVI	LTE Band XXXVIII	LTE Band XLI	WiFi 2.4G	BT			
Head	Left Hand Touched	0.767	0.361	0.360	0.393	0.547	0.302	0.373	0.735	0.395	0.772	0.490	0.805	0.335	0.263	0.787	/	1.592	N/A	
	Left Hand Tilted 15°	0.704	0.296	0.264	0.376	0.529	0.328	0.377	0.691	0.328	0.734	0.470	0.650	0.289	0.253	0.847	/	1.581	N/A	
	Right Hand Touched	0.875	1.244	0.617	1.021	0.941	0.768	1.224	1.071	0.914	1.036	1.233	1.280	1.197	1.246	0.188	/	1.468	N/A	
	Right Hand Tilted 15°	0.720	0.668	0.752	0.641	1.187	1.047	0.698	1.083	1.048	1.251	1.257	1.290	1.056	1.164	0.225	/	1.515	N/A	
Body-worn 15mm	Front side	0.207	0.105	0.080	0.102	0.186	0.067	0.085	0.123	0.109	0.214	0.114	0.150	0.161	0.115	0.164	0.278	0.492	N/A	
	Back side	0.159	0.121	0.098	0.122	0.241	0.140	0.120	0.200	0.215	0.252	0.205	0.325	0.170	0.114	0.164	0.278	0.603	N/A	
Hotspot 10mm	Front side	0.435	0.174	0.123	0.226	0.203	0.195	0.200	0.428	0.035	0.390	0.241	0.406	0.174	0.256	0.367	/	0.802	N/A	
	Back side	0.656	0.266	0.181	0.254	0.539	0.291	0.241	0.498	0.320	0.524	0.350	0.480	0.238	0.282	0.367	/	1.023	N/A	
	Left side	0.322	0.223	0.213	0.228	0.137	0.250	0.108	0.288	0.038	0.345	0.227	0.260	0.221	0.272	0.367	/	0.712	N/A	
	Right side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	N/A
	Top side	0.345	0.166	0.146	0.316	0.163	0.237	0.288	0.342	0.015	0.301	0.174	0.303	0.085	0.111	0.367	/	0.712	N/A	
	Bottom side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	N/A

Table 175: SAR Simultaneous Tx Combination of Second antenna and 2.4G WiFi/BT.

Test Position		Second antenna SAR _{Max}														WiFi/BT antenna	Σ1-g SAR (1.6W/kg Limit)	SPLSR	
		GSM850	GSM1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE Band II	LTE Band IV	LTE Band V	LTE Band VII	LTE Band XII	LTE Band XVII	LTE Band XXVI	LTE Band XXXVIII	LTE Band XLI	WiFi 5G			
Head	Left Hand Touched	0.767	0.361	0.360	0.393	0.547	0.302	0.373	0.735	0.395	0.772	0.490	0.805	0.335	0.263	0.653	1.458	N/A	
	Left Hand Tilted 15°	0.704	0.296	0.264	0.376	0.529	0.328	0.377	0.691	0.328	0.734	0.470	0.650	0.289	0.253	0.552	1.286	N/A	
	Right Hand Touched	0.875	1.244	0.617	1.021	0.941	0.768	1.224	1.071	0.914	1.036	1.233	1.280	1.197	1.246	0.302	1.582	N/A	
	Right Hand Tilted 15°	0.720	0.668	0.752	0.641	1.187	1.047	0.698	1.083	1.048	1.251	1.257	1.290	1.056	1.164	0.291	1.581	N/A	
Body-worn 15mm	Front side	0.207	0.105	0.080	0.102	0.186	0.067	0.085	0.123	0.109	0.214	0.114	0.150	0.161	0.115	0.129	0.343	N/A	
	Back side	0.159	0.121	0.098	0.122	0.241	0.140	0.120	0.200	0.215	0.252	0.205	0.325	0.170	0.114	0.129	0.454	N/A	
Hotspot 10mm	Front side	0.435	0.174	0.123	0.226	0.203	0.195	0.200	0.428	0.035	0.390	0.241	0.406	0.174	0.256	0.272	0.707	N/A	
	Back side	0.656	0.266	0.181	0.254	0.539	0.291	0.241	0.498	0.320	0.524	0.350	0.480	0.238	0.282	0.272	0.928	N/A	
	Left side	0.322	0.223	0.213	0.228	0.137	0.250	0.108	0.288	0.038	0.345	0.227	0.260	0.221	0.272	0.272	0.617	N/A	
	Right side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	N/A
	Top side	0.345	0.166	0.146	0.316	0.163	0.237	0.288	0.342	0.015	0.301	0.174	0.303	0.085	0.111	0.272	0.617	N/A	
	Bottom side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.000	N/A

Table 176: SAR Simultaneous Tx Combination of Second antenna and 5G WiFi.

Test Position		Main antenna SAR _{Max}														WiFi/BT antenna SAR _{Max}		Σ1-g SAR (1.6W/kg Limit)	SPLSR
		GSM850	GSM1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE Band II	LTE Band IV	LTE Band V	LTE Band VII	LTE Band XII	LTE Band XVII	LTE Band XXVI	LTE Band XXXVIII	LTE Band XLI	WiFi 2.4G	BT		
Head	Left Hand Touched	0.262	0.188	0.372	0.348	0.271	0.358	0.576	0.312	0.552	0.199	0.136	0.231	0.164	0.217	0.787	/	1.363	N/A
	Left Hand Tilted 15°	0.231	0.125	0.259	0.260	0.233	0.300	0.466	0.272	0.141	0.158	0.121	0.202	0.095	0.153	0.847	/	1.313	N/A
	Right Hand Touched	0.320	0.455	0.733	0.696	0.373	1.038	0.755	0.496	0.776	0.302	0.237	0.429	0.411	0.443	0.308	/	1.346	N/A
	Right Hand Tilted 15°	0.156	0.102	0.194	0.230	0.233	0.216	0.292	0.241	0.271	0.143	0.115	0.183	0.057	0.078	0.366	/	0.658	N/A
Body-worn 15mm	Front side	0.234	0.229	0.442	0.457	0.227	0.538	0.427	0.254	0.303	0.229	0.171	0.312	0.202	0.172	0.164	0.278	0.816	N/A
	Back side	0.297	0.366	0.685	0.517	0.340	0.956	0.641	0.341	0.429	0.337	0.285	0.419	0.253	0.258	0.164	0.278	1.234	N/A
Hotspot 10mm	Front side	0.381	0.536	0.481	0.600	0.257	0.342	0.744	0.294	0.356	0.288	0.290	0.339	0.471	0.546	0.367	/	1.111	N/A
	Back side	0.451	0.917	0.723	0.902	0.314	0.496	1.102	0.393	0.554	0.441	0.390	0.571	0.645	0.731	0.367	/	1.469	N/A
	Left side	0.215	0.043	0.050	0.107	0.116	0.049	0.229	0.116	0.020	0.174	0.197	0.180	0.020	0.022	0.367	/	0.596	N/A
	Right side	0.610	0.404	0.366	0.403	0.534	0.256	0.324	0.592	0.326	0.368	0.382	0.720	0.495	0.517	/	/	0.720	N/A
	Top side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.367	/	0.367	N/A
	Bottom side	0.172	1.067	1.027	0.599	0.142	0.493	0.152	0.167	0.275	0.141	0.141	0.259	0.368	0.326	/	/	1.067	N/A

Table 177: SAR Simultaneous Tx Combination of Main antenna and 2.4G WiFi/BT.

Test Position		Main antenna SAR _{max}														WiFi/BT antenna	Σ1-g SAR (1.6W/kg Limit)	SPLSR
		GSM850	GSM1900	UMTS Band II	UMTS Band IV	UMTS Band V	LTE Band II	LTE Band IV	LTE Band V	LTE Band VII	LTE Band XII	LTE Band XVII	LTE Band XXVI	LTE Band XXXVIII	LTE Band XLI	WiFi 5G		
Head	Left Hand Touched	0.262	0.188	0.372	0.348	0.271	0.358	0.576	0.312	0.552	0.199	0.136	0.231	0.164	0.217	0.653	1.229	N/A
	Left Hand Tilted 15°	0.231	0.125	0.259	0.260	0.233	0.300	0.466	0.272	0.141	0.158	0.121	0.202	0.095	0.153	0.552	1.018	N/A
	Right Hand Touched	0.320	0.455	0.733	0.696	0.373	1.038	0.755	0.496	0.776	0.302	0.237	0.429	0.411	0.443	0.302	1.340	N/A
	Right Hand Tilted 15°	0.156	0.102	0.194	0.230	0.233	0.216	0.292	0.241	0.271	0.143	0.115	0.183	0.057	0.078	0.548	0.840	N/A
Body-worn 15mm	Front side	0.234	0.229	0.442	0.457	0.227	0.538	0.427	0.254	0.303	0.229	0.171	0.312	0.202	0.172	0.129	0.667	N/A
	Back side	0.297	0.366	0.685	0.517	0.340	0.956	0.641	0.341	0.429	0.337	0.285	0.419	0.253	0.258	0.129	1.085	N/A
Hotspot 10mm	Front side	0.381	0.536	0.481	0.600	0.257	0.342	0.744	0.294	0.356	0.288	0.290	0.339	0.471	0.546	0.272	1.016	N/A
	Back side	0.451	0.917	0.723	0.902	0.314	0.496	1.102	0.393	0.554	0.441	0.390	0.571	0.645	0.731	0.272	1.374	N/A
	Left side	0.215	0.043	0.050	0.107	0.116	0.049	0.229	0.116	0.020	0.174	0.197	0.180	0.020	0.022	0.272	0.501	N/A
	Right side	0.610	0.404	0.366	0.403	0.534	0.256	0.324	0.592	0.326	0.368	0.382	0.720	0.495	0.517	/	0.720	N/A
	Top side	/	/	/	/	/	/	/	/	/	/	/	/	/	/	0.272	0.272	N/A
	Bottom side	0.172	1.067	1.027	0.599	0.142	0.493	0.152	0.167	0.275	0.141	0.141	0.259	0.368	0.326	/	1.067	N/A

Table 178: SAR Simultaneous Tx Combination of Main antenna and 5G WiFi.

7.3.4 Simultaneous Transmission Conclusion

The above numeral summed SAR results and/or SPLSR analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore simultaneous transmission SAR with Volume Scans is not required per KDB 447498 D01v06.



Appendix A. System Check Plots
(Pls See Appendix A.)

Appendix B. SAR Measurement Plots
(Pls See Appendix B.)

Appendix C. Calibration Certificate
(Pls See Appendix C.)

Appendix D. Photo documentation
(Pls See Appendix D.)

End