



The Photos of SAR test

No. I15Z43176-SEM01

For

Huawei Technologies Co.,Ltd

Smart Phone

Model name: EVA-L19

With

Hardware Version: HL1UEVAM

Software Version: A168-L09C900B072



中国认可
国际互认
检测
TESTING
CNAS L0570

Note:


The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:


CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT
No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191
Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504
Email:ctl_terminals@catr.cn, website:www.chinattl.com




Picture 1: Constituents of the sample

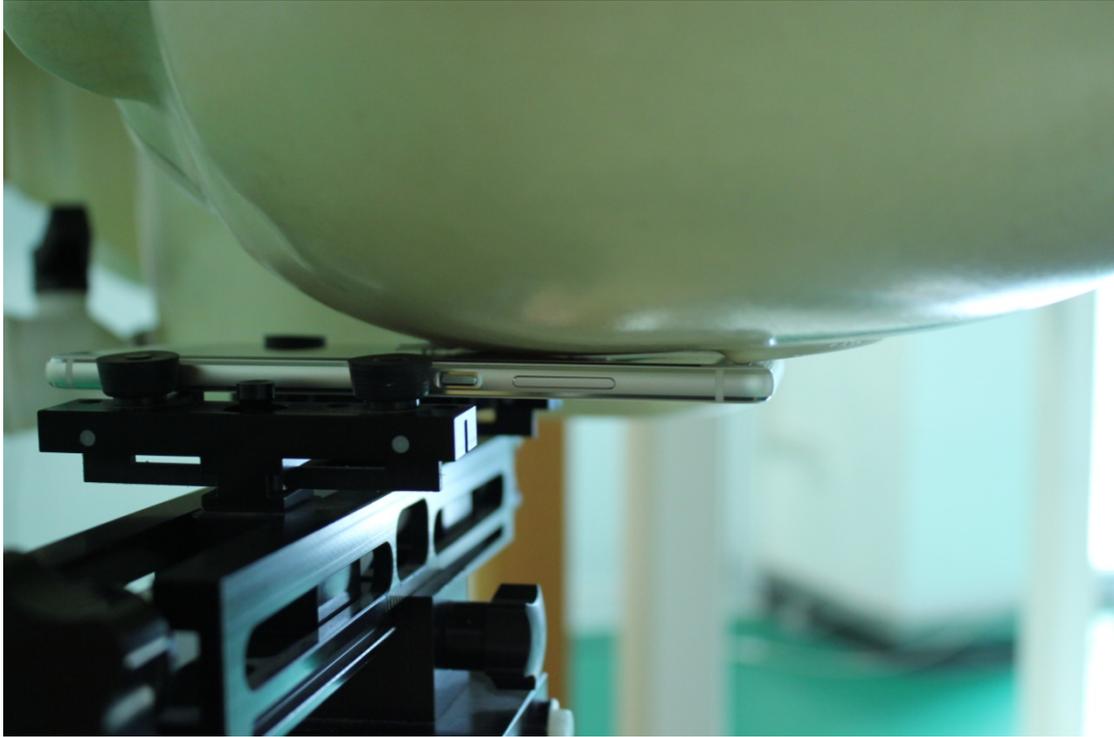


Picture 2: Left Hand Touch Cheek Position

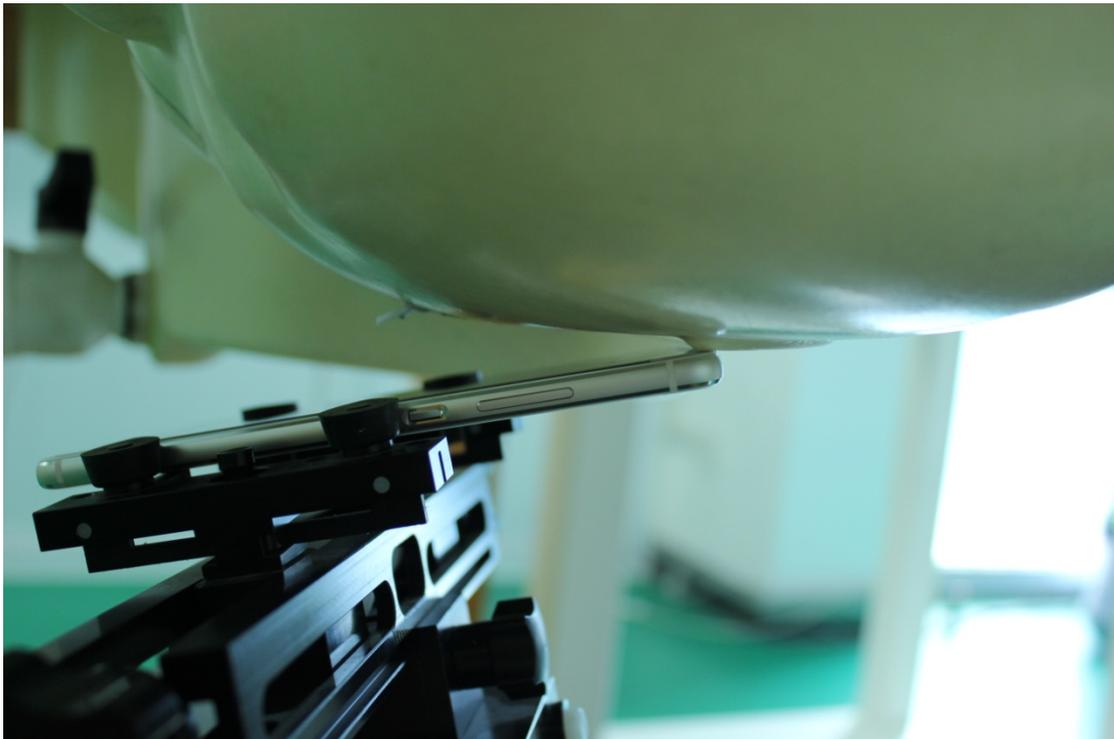

Picture 3: Left Hand Tilt 15° Position

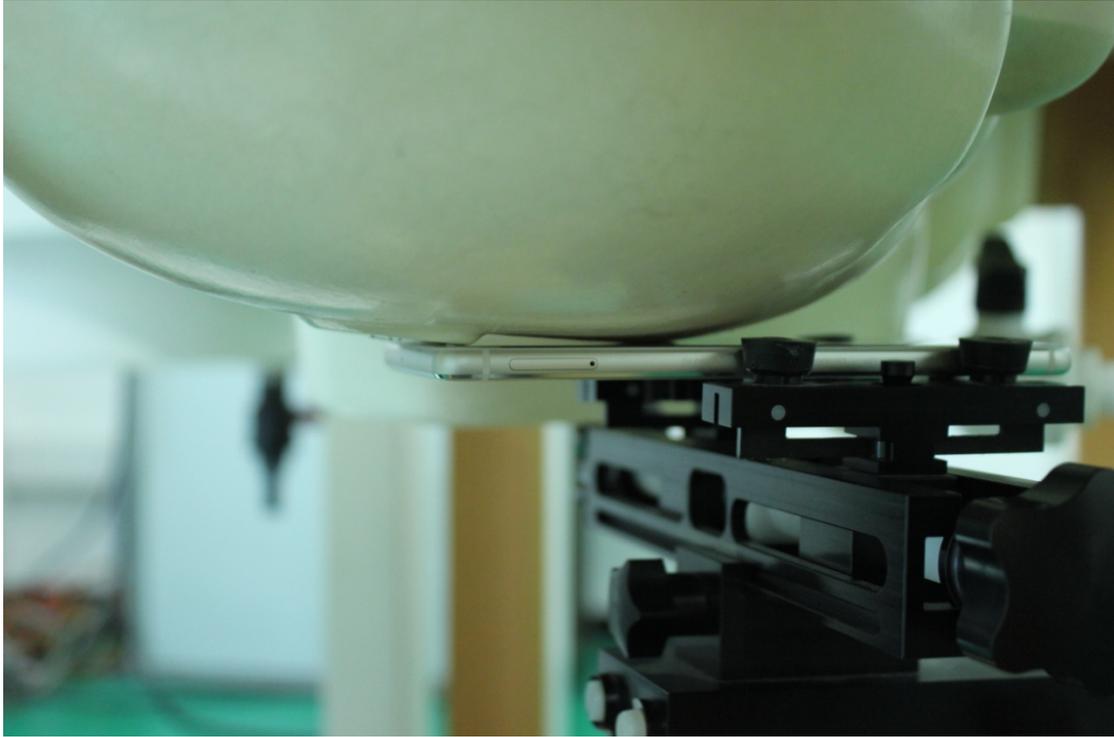

Picture 4: Right Hand Touch Cheek Position

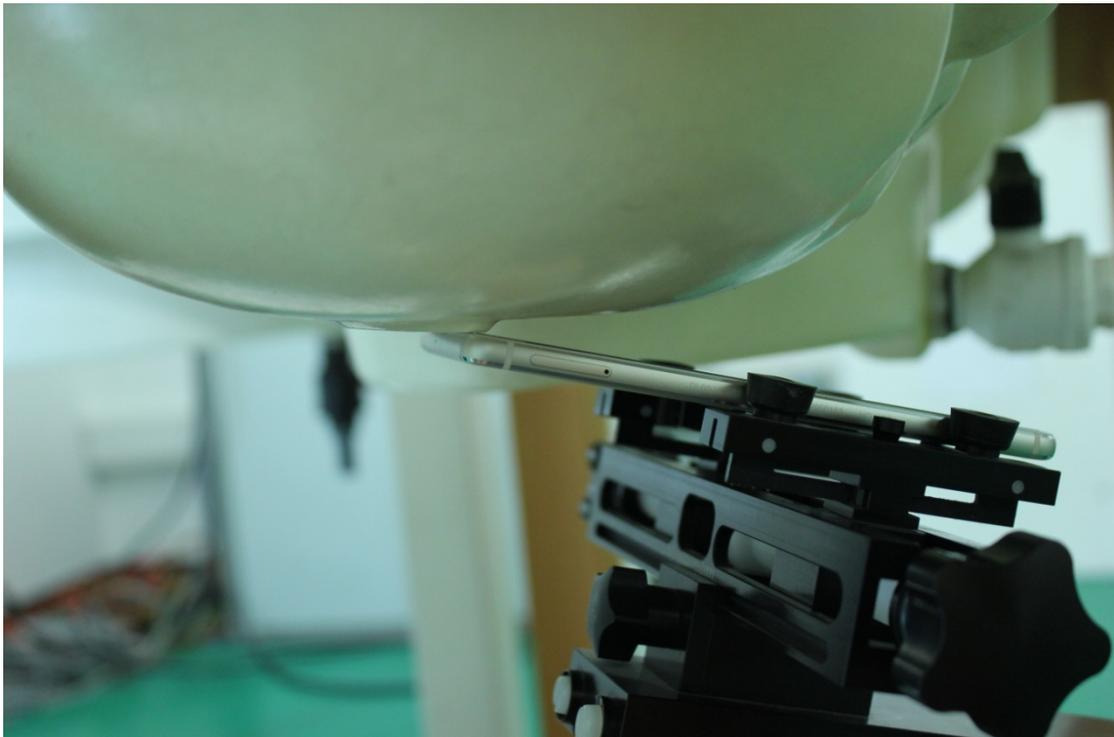


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10mm or 15mm between the EUT and the phantom bottom:



Picture 6: Front – 15mm

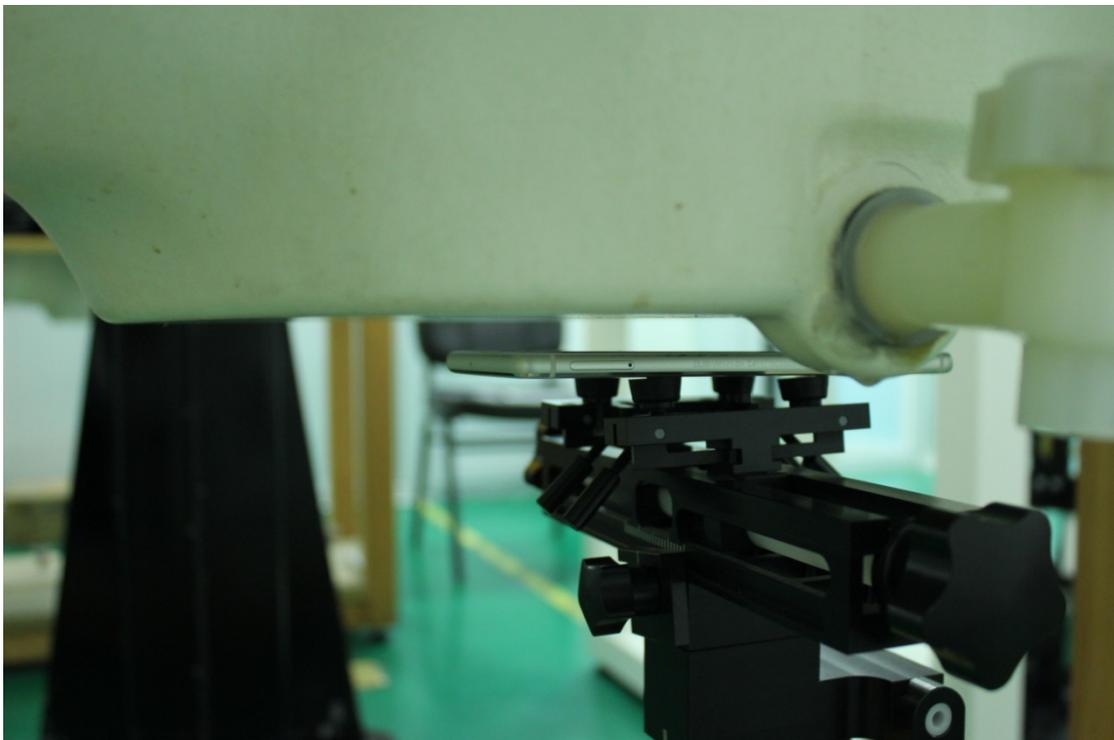


Picture 6-1: Front – 10mm

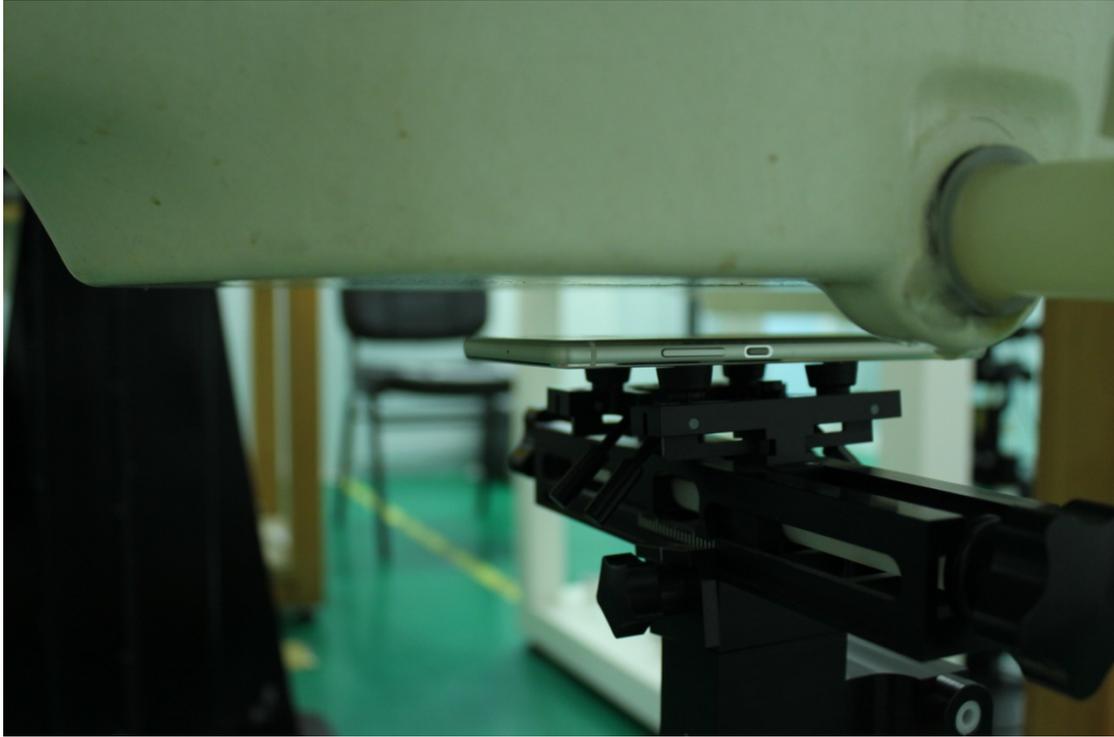

Picture 7: Rear – 15mm




Picture 7-1: Rear – 10mm

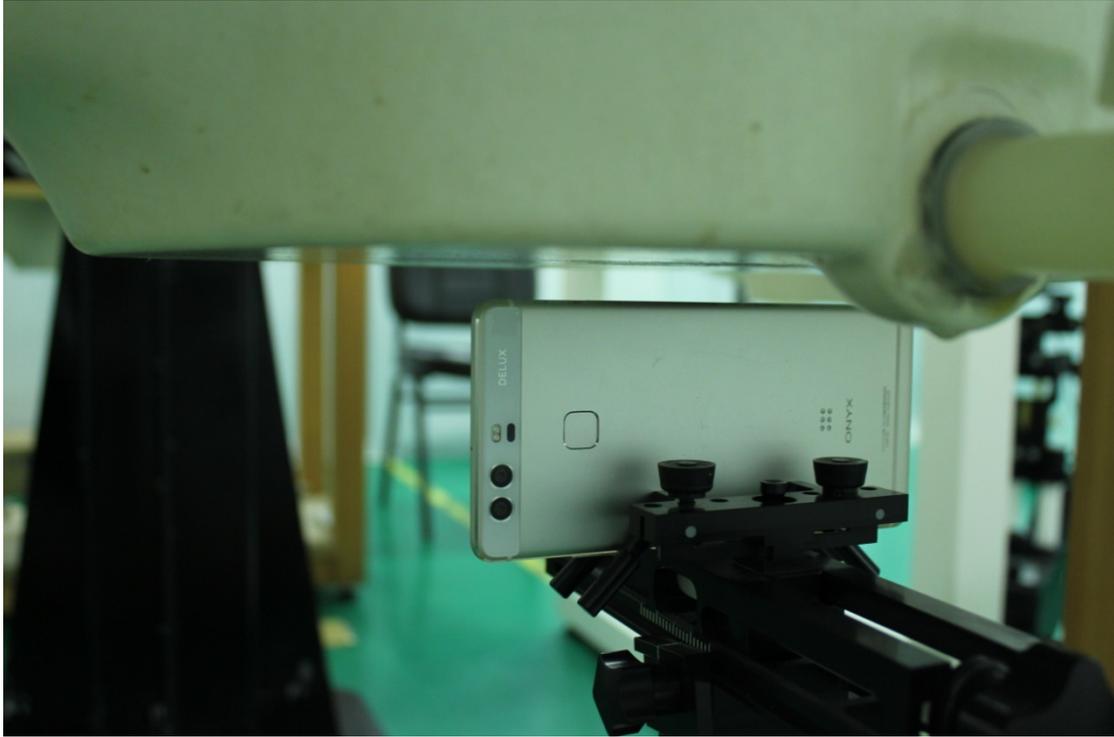

Picture 8: Left – 10mm



Picture 9: Right – 10mm

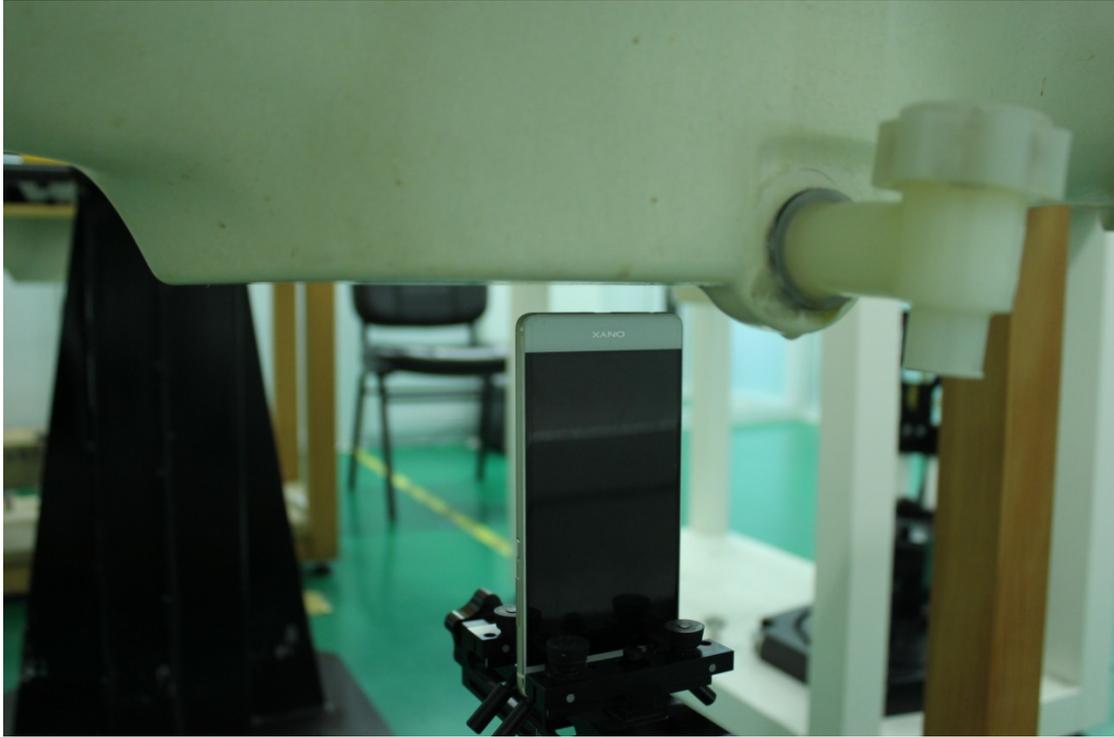

Picture 10: Bottom – 10mm



Picture 11: Top – 10mm