



Report No.: SYBH(Z-SAR) 030012015-2

FCC ID:QISF256-BVW

---

## Appendix A. System Check Plots

<b>Table of contents</b>
<b>SystemPerformanceCheck-D835-EX-Body</b>
<b>SystemPerformanceCheck-D1900-EX-Body</b>

Test Laboratory: HUAWEI SAR/HAC Lab

## SystemPerformanceCheck-D835-EX-Body

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d059**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.946$  S/m;  $\epsilon_r = 53.65$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(9.06, 9.06, 9.06); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM1; Type: SAM; Serial: TP-1475
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=15mm, Pin=250mW/Area Scan (7x16x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.72 W/kg


**Configuration/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 51.94 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.53 W/kg

**SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.58 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

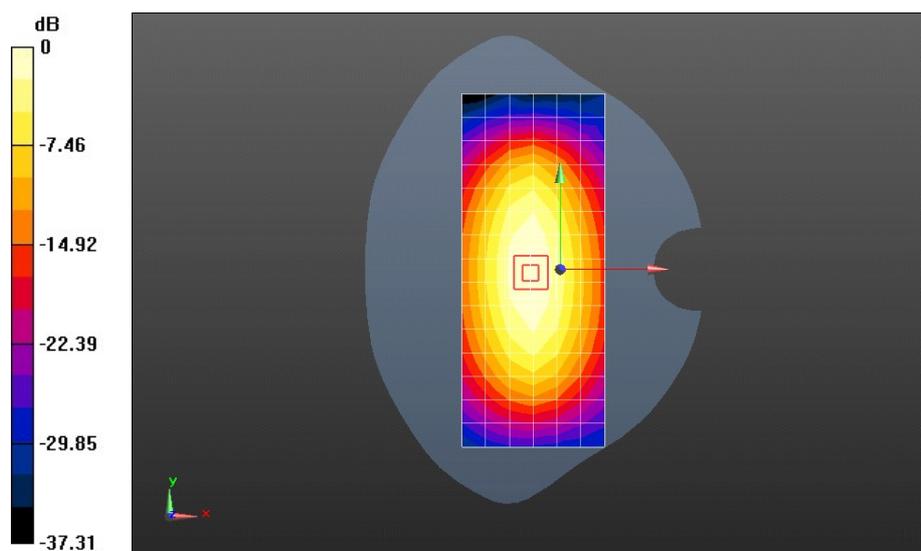

Test Laboratory: HUAWEI SAR/HAC Lab

### SystemPerformanceCheck-D1900-EX-Body

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d143**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.532$  S/m;  $\epsilon_r = 51.348$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3744; ConvF(7.17, 7.17, 7.17); Calibrated: 2014-7-24;
- Sensor-Surface: 3mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE4 Sn851; Calibrated: 2014-7-24
- Phantom: SAM2; Type: SAM; Serial: TP:1474
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/d=10mm, Pin=250mW/Area Scan (6x9x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 9.76 W/kg

**Configuration/d=10mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 89.34 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 19.3 W/kg

**SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.54 W/kg**

Maximum value of SAR (measured) = 13.6 W/kg

