

# FCC Test Report

## FCC ID: QISFDR-A01W

**Project No.** : 1512C215  
**Equipment** : HUAWEI MediaPad T2 10.0 Pro  
**Model Name** : FDR-A01w  
**Applicant** : Huawei Technologies Co., Ltd.  
**Address** : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

**Date of Receipt** : Dec. 21, 2015  
**Date of Test** : Dec. 21, 2015 ~ Dec. 29, 2015  
**Issued Date** : Dec. 30, 2015  
**Tested by** : BTL Inc.

**Testing Engineer** : Pike Lee  
(Pike Lee)

**Technical Manager** : Jeff Yang  
(Jeff Yang)

**Authorized Signatory** : Andy Chiu  
(Andy Chiu)

# **B T L I N C .**

B1, No. 37, Lane 365, Yang-Guang St.,  
Nei-Hu District, Taipei City 114, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331



0659

### **Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

**BTL's** report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>5</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>6</b>
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
<b>3 . GENERAL INFORMATION</b>	<b>8</b>
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 DESCRIPTION OF SUPPORT UNITS	11
<b>4 . EMC EMISSION TEST</b>	<b>12</b>
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	16
4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)	17
4.2.7 TEST RESULTS (ABOVE 1000 MHZ)	17
<b>5 . MEASUREMENT INSTRUMENTS LIST</b>	<b>18</b>
<b>6 . EUT TEST PHOTO</b>	<b>19</b>
<b>ATTACHMENT A - CONDUCTED EMISSION</b>	<b>23</b>
<b>ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)</b>	<b>40</b>
<b>ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)</b>	<b>57</b>

## REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCE-1-1512C215	Original Issue.	Dec. 30, 2015

## 1. CERTIFICATION

Equipment : HUAWEI MediaPad T2 10.0 Pro  
Brand Name : HUAWEI  
Model Name : FDR-A01w  
Applicant : Huawei Technologies Co., Ltd.  
Manufacturer : Huawei Technologies Co., Ltd.  
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd.,  
Bantian, Longgang District Shenzhen China  
Date of Test : Dec. 21, 2015 ~ Dec. 29, 2015  
Test Sample : Engineering Sample  
Standard(s) : FCC Part 15, Subpart B: 2014  
ANSI C63.4-2014

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCE-1-1512C215) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

EMC Emission				
Standard(s)	Test Item	Limit	Judgment	Remark
FCC Part15, Subpart B: 2014 ANSI C63.4-2014	Conducted Emission	Class B	PASS	
	Radiated emission Below 1 GHz	Class B	PASS	
	Radiated emission Above 1 GHz	Class B	PASS	<b>NOTE (2)</b>

**NOTE:**

- (1) " N/A" denotes test is not applicable to this device.
- (2) The EUT's max operating frequency is 5850 MHz which exceeds 108 MHz, so the test will be performed.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of 1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.).

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2  $U_{\text{CISPR}}$  requirement.

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U, (dB)
C02	CISPR	150 KHz~30MHz	2.59

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
CB08	CISPR	30MHz~200MHz	V	3.22
		30MHz~200MHz	H	3.35
		200MHz~ 1,000MHz	V	3.24
		200MHz~ 1,000MHz	H	3.11
		1,000MHz~18,000MHz	V	4.05
		1,000MHz~18,000MHz	H	3.97
		18,000MHz~40,000MHz	V	4.04
		18,000MHz~40,000MHz	H	4.01

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	HUAWEI MediaPad T2 10.0 Pro
Brand Name	HUAWEI
Model Name	FDR-A01w
Model Difference	N/A
Power Source	#1 DC Voltage supplied from AC/DC adapter. Manufacturer: (1) HUIZHOU BYD ELECTRONIC CO., LTD. (2) Shenzhen Huntkey Electric Co., Ltd. (3) Phihong Technology Co.,Ltd Model: HW-050200U01 #2 Supplied from battery. Manufacturer: (1) Sunwoda Electronic Co., LTD (2) SCUD (FUJIAN) Electronics Co., Ltd (3) Harbin Coslight Power Co., Ltd. Battery Model: HB26A5I0EBC
Power Rating	#1 I/P: 100V~240V AC and 50/60 Hz,0.5A O/P: +5V $\overline{=}$ 2A #2 DC 3.8V 6660mAh
HW Version	SH1FDRA01LM
SW Version	FDR-A01wC001B005

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- 2.

Item	Mfr/Brand	Model.
USB Cable	Connrex (Shen Zhen) Industrial, Ltd.	CD-U0405-1042
	Unirise Communication Technology Co.,Ltd.	LSA00714
	SHEN ZHEN PANG NGAI INDUSTRIAL CO., LTD	H09-000543
Earphone	GoerTek Inc	HG-04A
	MERRY ELECTRONICS CO., LTD	EMC323-011-01
Battery	Sunwoda Electronic Co., LTD	HB26A5I0EBC
	SCUD (FUJIAN) Electronics Co., Ltd	
	Harbin Coslight Power Co., Ltd.	

### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Mode 2	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Mode 3	Adapter+BT+2.4G WIFI+GPS+Camera on
Mode 4	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:


For Conducted Test	
Final Test Mode	Description
Mode 1	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Mode 2	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Mode 3	Adapter+BT+2.4G WIFI+GPS+Camera on
Mode 4	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on

For Radiated Test Below 1GHz	
Final Test Mode	Description
Mode 1	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Mode 2	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Mode 3	Adapter+BT+2.4G WIFI+GPS+Camera on
Mode 4	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on


For Radiated Test Above 1GHz	
Final Test Mode	Description
Mode 1	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Mode 2	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Mode 3	Adapter+BT+2.4G WIFI+GPS+Camera on
Mode 4	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on

### 3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

#### Mode 1-6

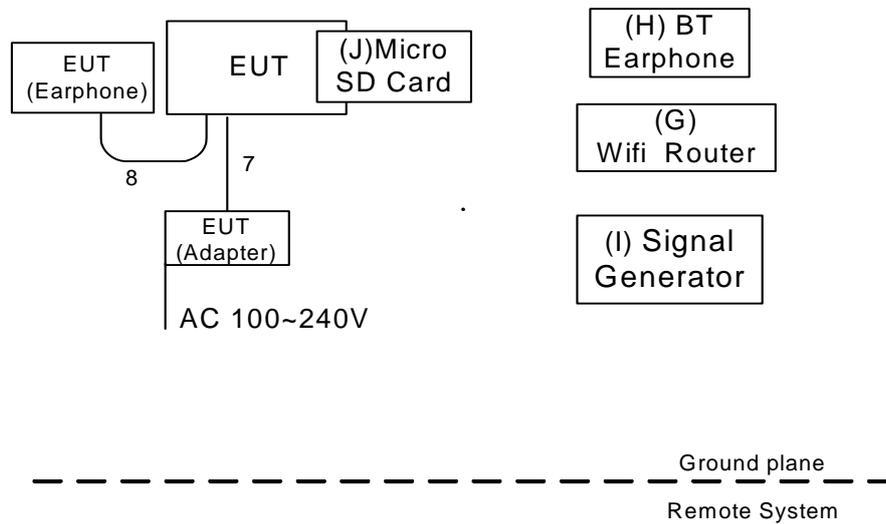

#### Mode 7

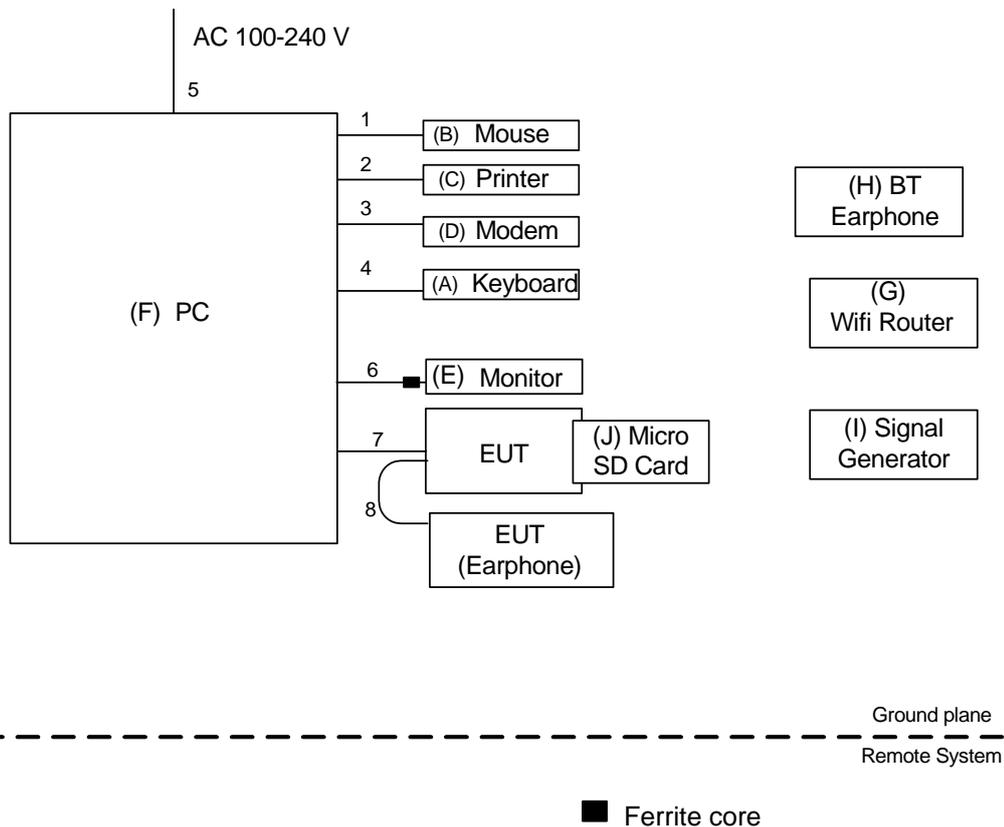

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	USB Keyboard	Dell	L100	DOC	CNORH6596589071 T08NE
B	USB Mouse	Dell	MO56UOA	DOC	FQJ000BS
C	Printer	SII	DPU-414	DOC	3018507 B
D	Modem	ACEEX	DM-1414V	IFAXDM1414	0603002131
E	LCD monitor	Dell	E177FPc	DOC	CNOFJ179-64180-6 AG-1WNS
F	PC	Dell	DCSM 745	DOC	G7K832X
G	Router	TP-LINK	TL-WR1041N	DOC	N/A
H	BT Earphone	N/A	N/A	DOC	N/A
I	Signal Generator	Agilent	E4438C	N/A	MY49071316
J	Micro SD card	Kingston	N/A	DOC	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	YES	NO	1.8m	USB Cable
2	YES	NO	1.8m	Parallel Cable
3	YES	NO	1.8m	RS232 Cable
4	YES	NO	1.8m	USB Cable
5	NO	NO	1.8m	AC power Cable
6	YES	YES	1.8m	D-SUB Cable
7	YES	NO	1m	USB Cable
8	NO	NO	1.1m	Earphone Cable

## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION (FREQUENCY RANGE 150KHZ-30MHZ)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
 Measurement Value = Reading Level + Correct Factor  
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)  
 Margin Level = Measurement Value – Limit Value


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

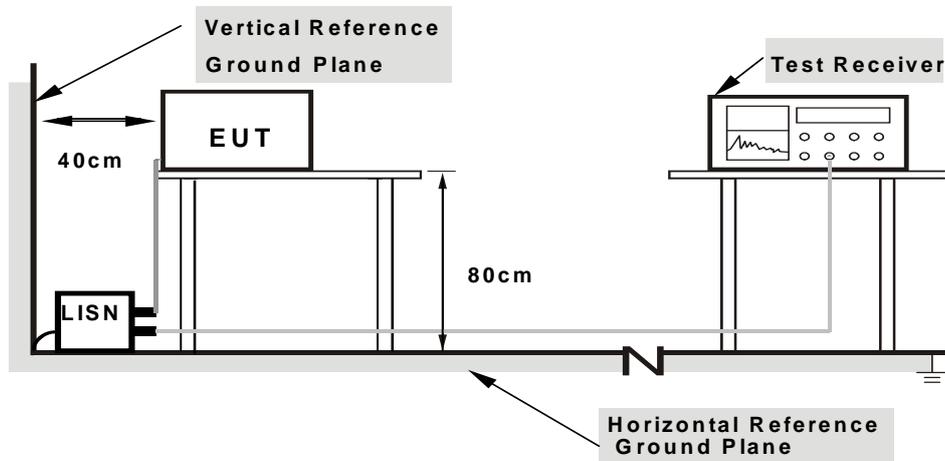

- Note:** 1.Support units were connected to second LISN.  
 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT exercise program used during radiated and/or conducted emission measurement was designed to exercise the various system components in a manner similar to a typical use.

#### 4.1.6 TEST RESULTS

Please refer to the Attachment A.

Temperature: 25°C Relative Humidity: 53%

#### Remark

- (1) All readings are QP Mode value unless otherwise stated AVG in column of『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “ \* ” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

#### Below 1 GHz

#### Measurement Method and Applied Limits:

##### ANSI C63.4:

Frequency (MHz)	Class A (at 10m)		Class B (at 3m)	
	(uV/m) Field strength	(dBuV/m) Field strength	(uV/m) Field strength	(dBuV/m) Field strength
30 - 88	90	39	100	40
88 - 216	150	43.5	150	43.5
216 - 960	210	46.4	200	46
Above 960	300	49.5	500	54

##### CISPR 22 or CAN/CSA-CISPR 22-10:

Frequency (MHz)	Class A (at 10m)	Class B (at 10m)
	dBuV/m	
30 - 230	40	30
230 - 1000	47	37

#### Above 1 GHz

#### Measurement Method and Applied Limits:

##### ANSI C63.4:

Frequency (MHz)	Class A				Class B	
	(dBuV/m) (at 3m)		(dBuV/m) (at 10m)		(dBuV/m) (at 3m)	
	Peak	Average	Peak	Average	Peak	Average
Above 1000	80	60	69.5	49.5	74	54

### FREQUENCY RANGE OF RADIATED MEASUREMENT (FOR UNINTENTIONAL RADIATORS)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

#### NOTE:

- (1) The limit for radiated test was performed according to as following:  
FCC Part 15, Subpart B: 2014
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m).  
3m Emission level = 10m Emission level + 20log(10m/3m).
- (4) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)  
Margin Level = Measurement Value - Limit Value

#### 4.2.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item - Block Diagram of system tested (please refer to 3.3).

#### Note


- j. For measurement of frequency 1GHz -18GHz, the EUT was set 3 meters away from the receiver antenna.  
 Emission level (dBuV/m)=20log Emission level (uV/m).  
 The limits above 18GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade form 3m to 1m  
 Distance extrapolation factor =  $20 \log (3\text{m}/1\text{m})$  dB ;  
 Limit line = specific limits (dBuV) + 9.5 dB.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP

##### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz

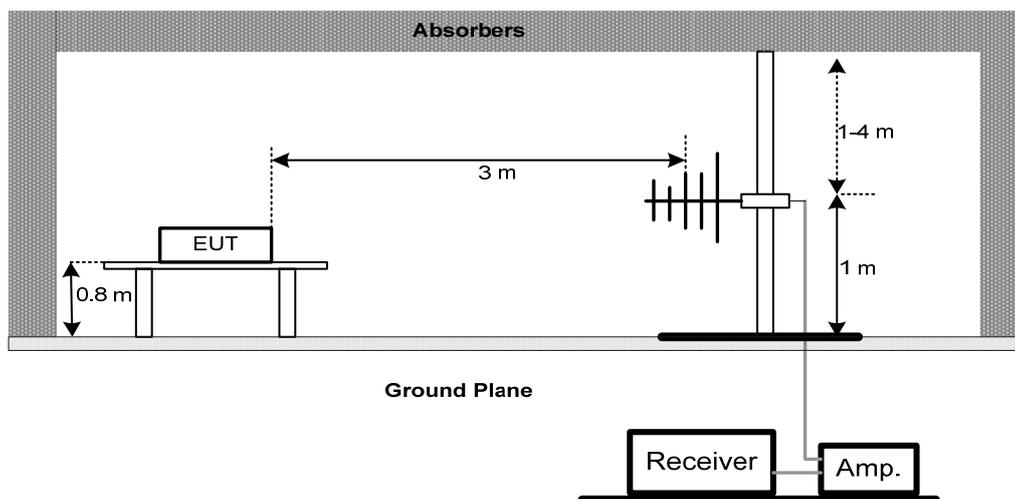

##### (B) Radiated Emission Test Set-Up Frequency Above 1 GHz

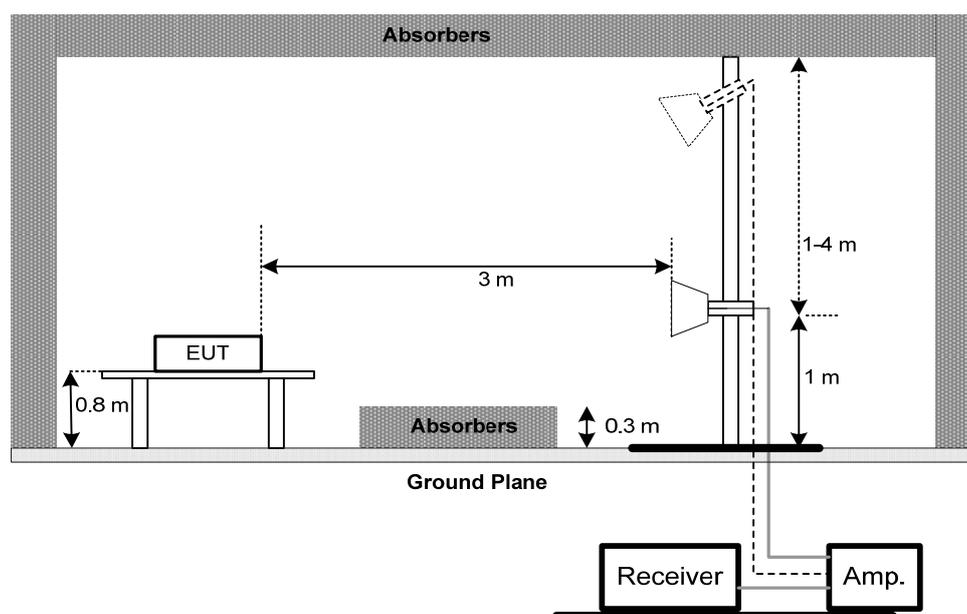

#### 4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### **4.2.6 TEST RESULTS (30MHZ TO 1000 MHZ)**

Please refer to the Attachment B.

Temperature: 21°C Relative Humidity: 51%

#### **4.2.7 TEST RESULTS (ABOVE 1000 MHZ)**

Please refer to the Attachment C

Temperature: 22°C Relative Humidity: 56%

Remark :

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (2) Data of measurement within this frequency range shown “ \* ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (3) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.

## 5. MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	100087	Nov. 21, 2016
2	Test Cable	TIMES	CFD300-NL	C02	Jun. 14, 2016
3	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
4	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A

Radiated Emission					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Log-Bicon Antenna	Schwarzbeck	VULB 9168	9168-352	Jul. 08, 2016
2	Pre-Amplifier	Anritsu	MH648A	M92649	Apr. 16, 2016
3	Test Cable	TIMES	LMR-400	12M	May 12, 2016
4	Test Cable	TIMES	LMR-400	3M	May 12, 2016
5	EMI Test Receiver	Agilent	N9038A	MY51210215	Apr. 21, 2016
6	Horn Antenna (1G)	Schwarzbeck	BBHA 9120 D	9120D-325	Jan. 11, 2016
7	Pre_Amplifier	Agilent	8449B	3008A01714	Apr. 14, 2016
8	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	1M	May 11, 2016
9	Microflex Cable	AISI	S104-SMAP-1	10M	May 13, 2016
10	Microflex Cable	HARBOUR INDUSTRIES	27478 LL142	3M	May 11, 2016
11	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 12, 2016
12	Measurement Software	EZ	EZ EMC (Version NB-03A)	N/A	N/A



Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.



## 6. EUT TEST PHOTO

### Conducted Measurement Photos Mode 1-6



**Conducted Measurement Photos****Mode 7**

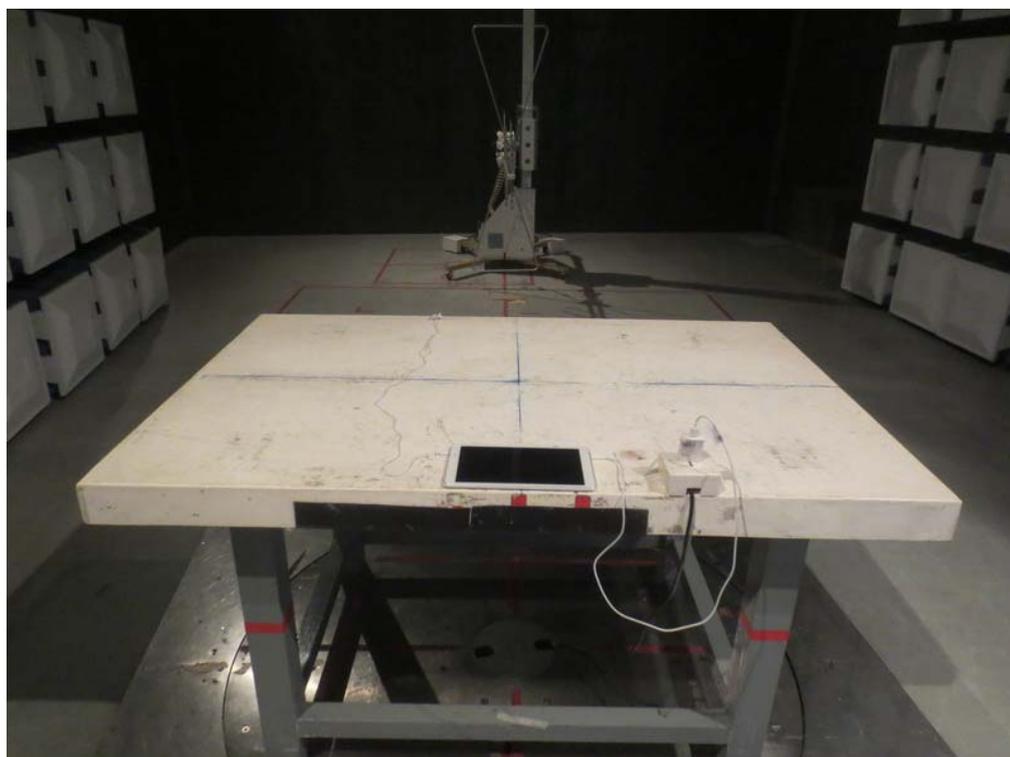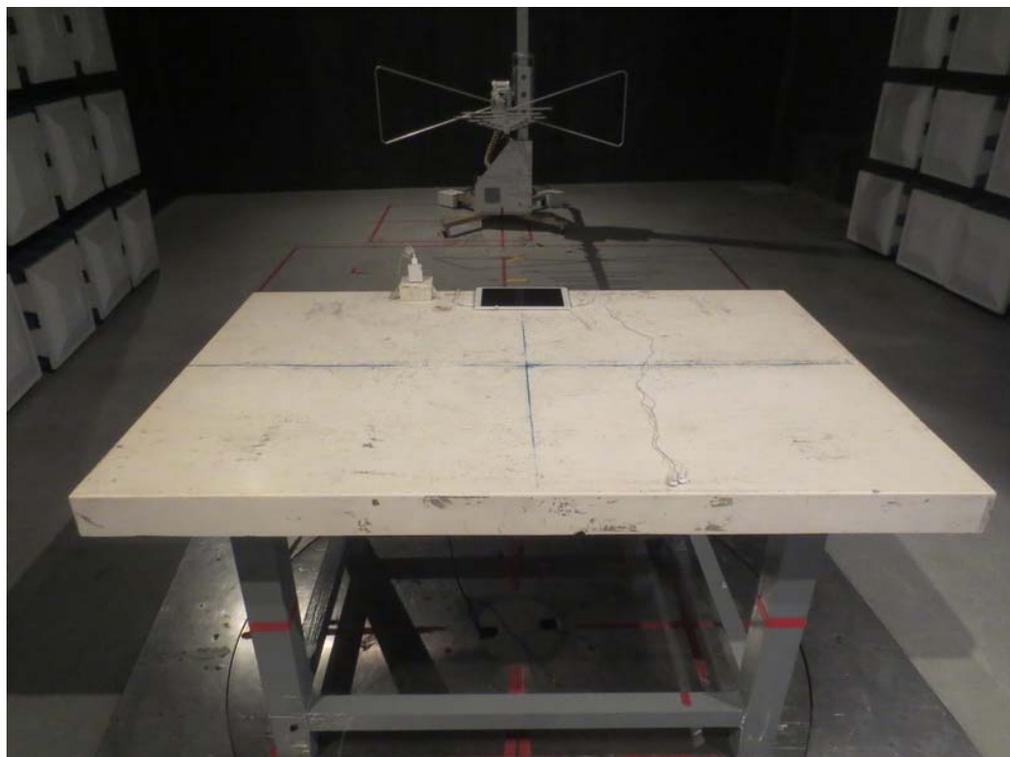
**Radiated Measurement Photos****Mode 1-6**

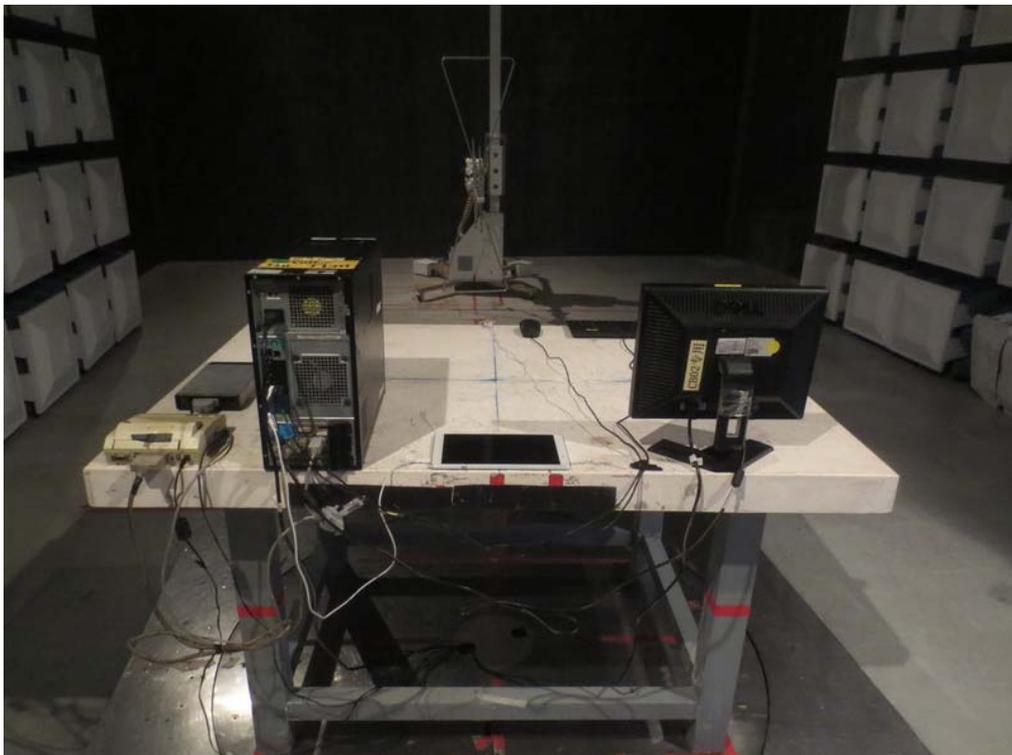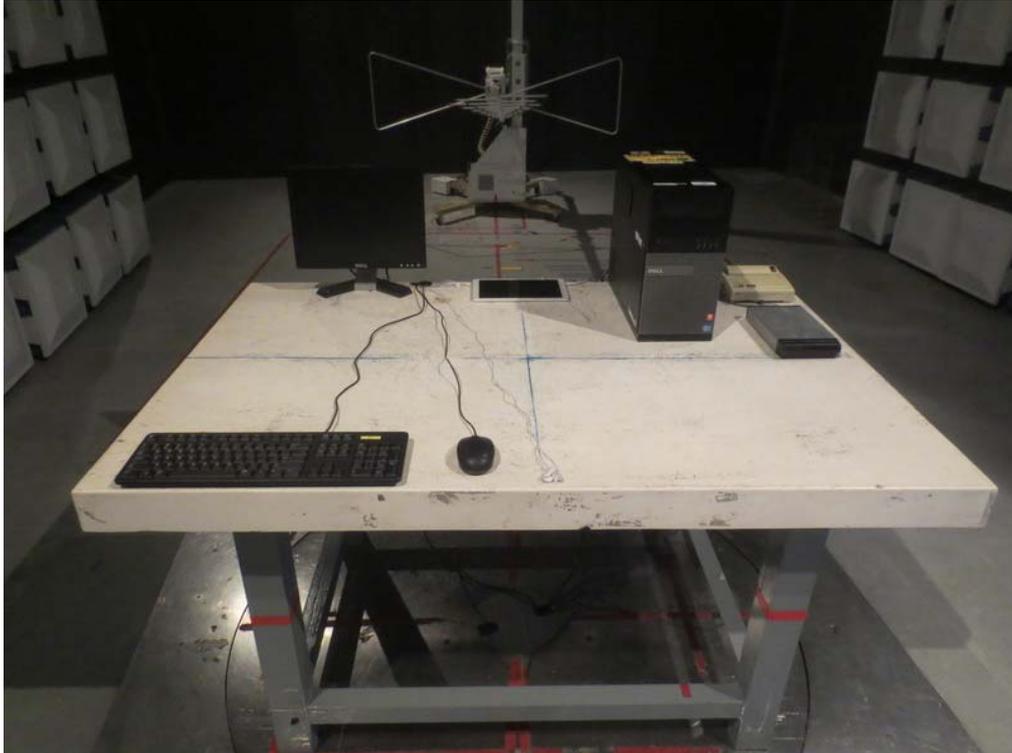**Radiated Measurement Photos****Mode 7**

## ATTACHMENT A - CONDUCTED EMISSION

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Note:	Adapter: Phihong +USB Cable: Connrex


## Line

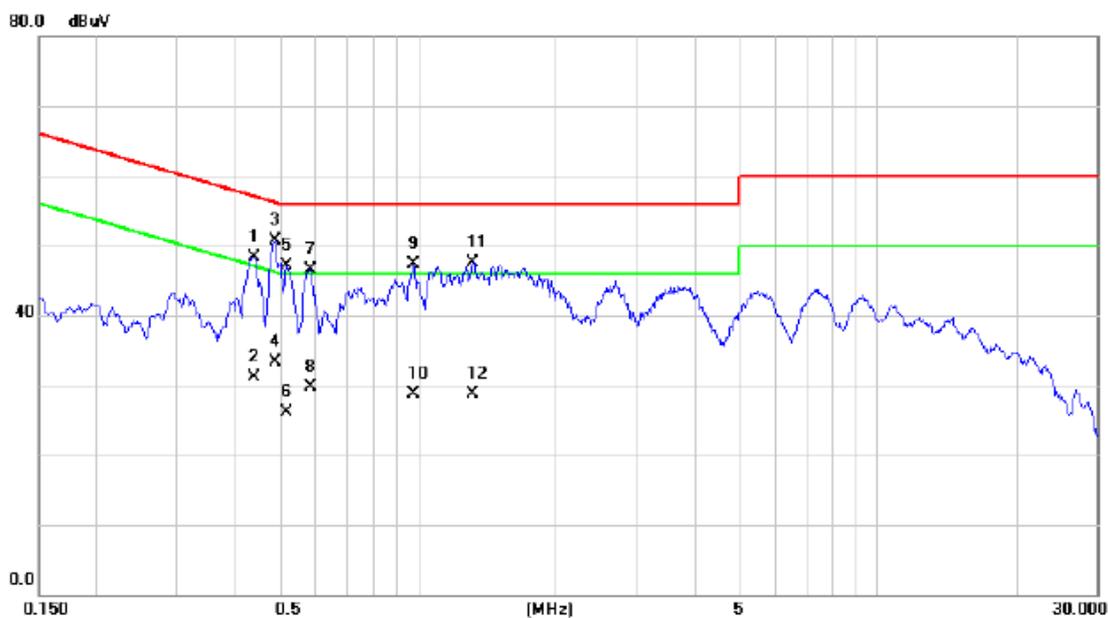

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4402	38.48	9.81	48.29	57.06	-8.77	QP	
2		0.4402	21.30	9.81	31.11	47.06	-15.95	AVG	
3	*	0.4897	40.83	9.82	50.65	56.17	-5.52	QP	
4		0.4897	23.40	9.82	33.22	46.17	-12.95	AVG	
5		0.5190	37.21	9.82	47.03	56.00	-8.97	QP	
6		0.5190	16.30	9.82	26.12	46.00	-19.88	AVG	
7		0.5842	36.62	9.85	46.47	56.00	-9.53	QP	
8		0.5842	19.80	9.85	29.65	46.00	-16.35	AVG	
9		0.9825	37.29	9.98	47.27	56.00	-8.73	QP	
10		0.9825	18.70	9.98	28.68	46.00	-17.32	AVG	
11		1.3223	37.57	9.99	47.56	56.00	-8.44	QP	
12		1.3223	18.70	9.99	28.69	46.00	-17.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Note:	Adapter: Phihong +USB Cable: Connrex


### Neutral

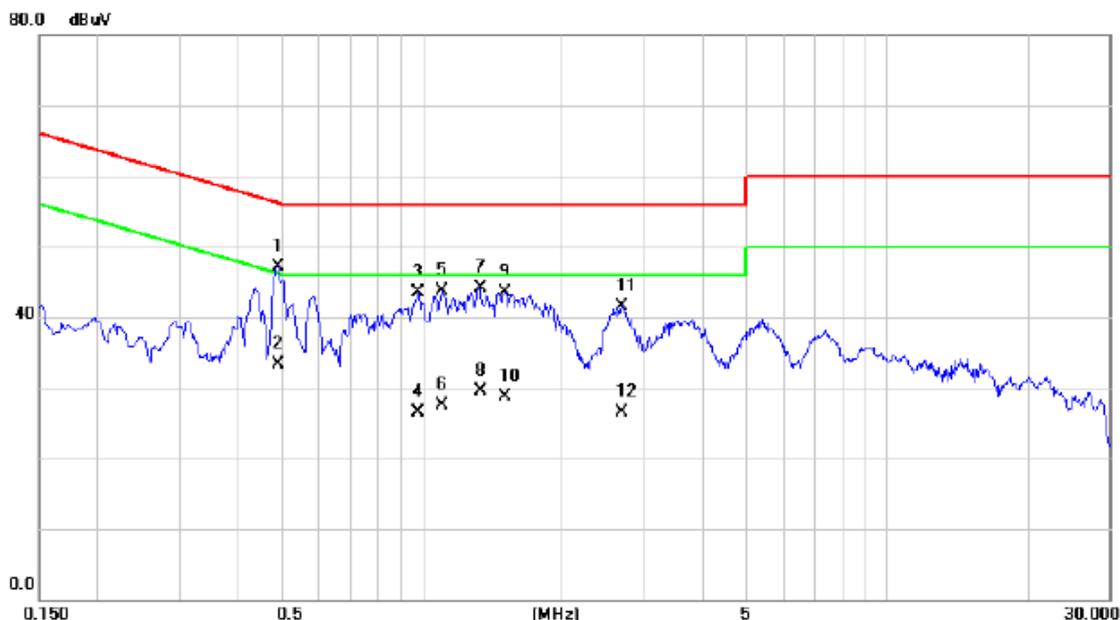

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.4897	37.52	9.65	47.17	56.17	-9.00	QP	
2		0.4897	23.60	9.65	33.25	46.17	-12.92	AVG	
3		0.9825	33.71	9.79	43.50	56.00	-12.50	QP	
4		0.9825	16.80	9.79	26.59	46.00	-19.41	AVG	
5		1.1062	33.81	9.80	43.61	56.00	-12.39	QP	
6		1.1062	17.80	9.80	27.60	46.00	-18.40	AVG	
7		1.3335	34.29	9.81	44.10	56.00	-11.90	QP	
8		1.3335	19.70	9.81	29.51	46.00	-16.49	AVG	
9		1.5113	33.75	9.82	43.57	56.00	-12.43	QP	
10		1.5113	18.80	9.82	28.62	46.00	-17.38	AVG	
11		2.6925	31.76	9.84	41.60	56.00	-14.40	QP	
12		2.6925	16.70	9.84	26.54	46.00	-19.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Note:	Adapter: Phihong +USB Cable: Connrex


## Line

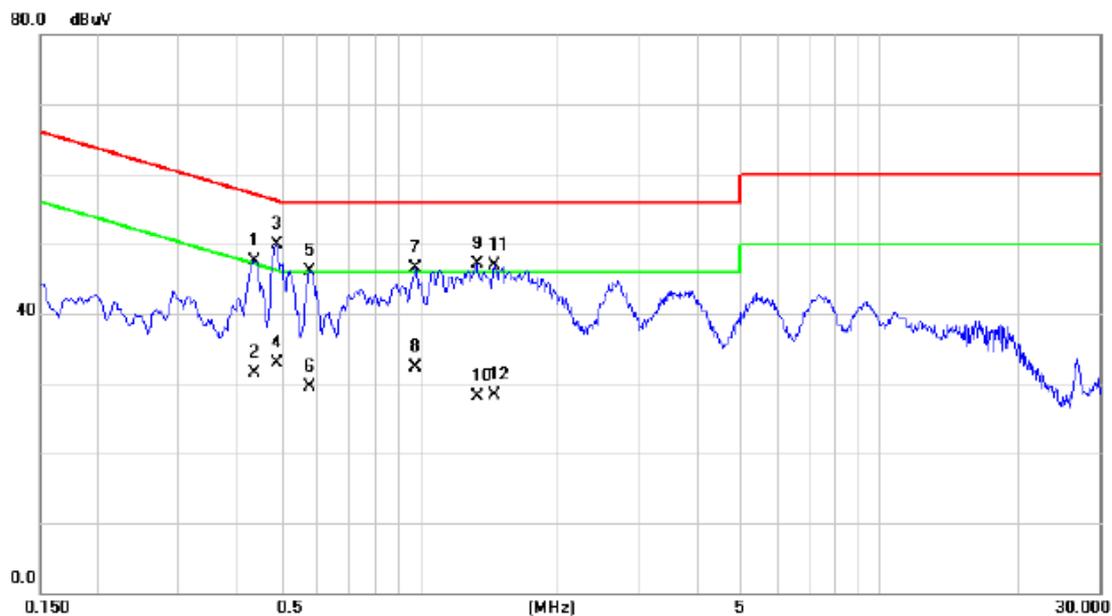

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.4380	37.79	9.81	47.60	57.10	-9.50	QP	
2		0.4380	21.70	9.81	31.51	47.10	-15.59	AVG	
3	*	0.4897	39.99	9.82	49.81	56.17	-6.36	QP	
4		0.4897	23.10	9.82	32.92	46.17	-13.25	AVG	
5		0.5775	36.16	9.85	46.01	56.00	-9.99	QP	
6		0.5775	19.60	9.85	29.45	46.00	-16.55	AVG	
7		0.9825	36.47	9.98	46.45	56.00	-9.55	QP	
8		0.9825	22.30	9.98	32.28	46.00	-13.72	AVG	
9		1.3313	37.21	9.98	47.19	56.00	-8.81	QP	
10		1.3313	18.20	9.98	28.18	46.00	-17.82	AVG	
11		1.4550	36.88	9.94	46.82	56.00	-9.18	QP	
12		1.4550	18.30	9.94	28.24	46.00	-17.76	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Note:	Adapter: Phihong +USB Cable: Connrex


### Neutral

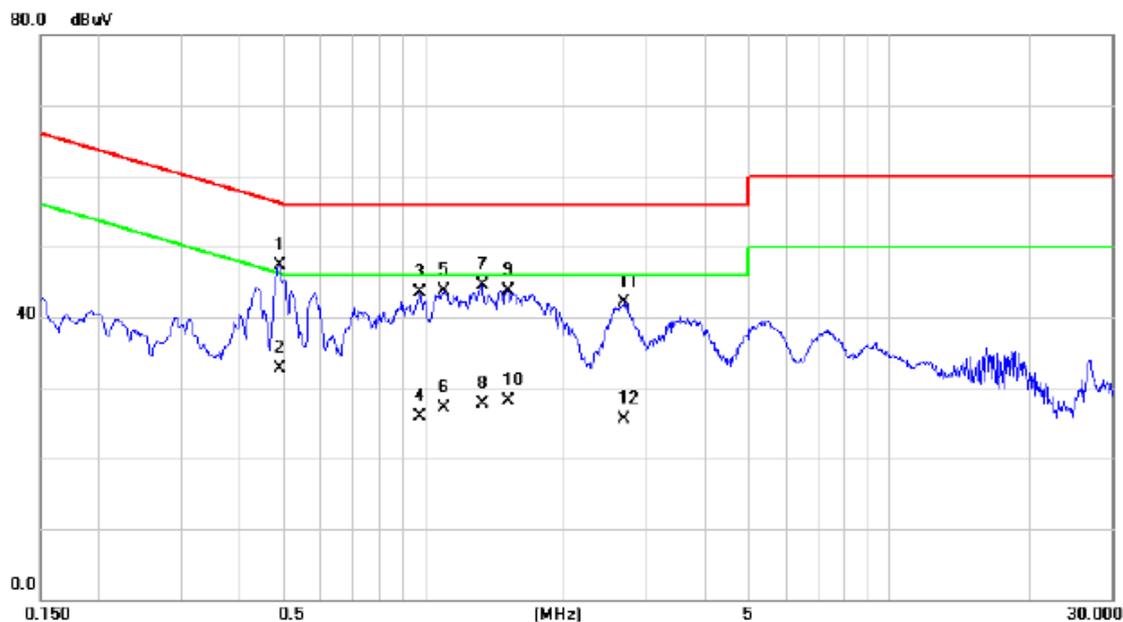

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.4897	37.60	9.65	47.25	56.17	-8.92	QP	
2		0.4897	23.10	9.65	32.75	46.17	-13.42	AVG	
3		0.9825	33.67	9.79	43.46	56.00	-12.54	QP	
4		0.9825	16.20	9.79	25.99	46.00	-20.01	AVG	
5		1.1085	33.98	9.80	43.78	56.00	-12.22	QP	
6		1.1085	17.30	9.80	27.10	46.00	-18.90	AVG	
7		1.3335	34.69	9.81	44.50	56.00	-11.50	QP	
8		1.3335	17.90	9.81	27.71	46.00	-18.29	AVG	
9		1.5135	33.98	9.82	43.80	56.00	-12.20	QP	
10		1.5135	18.20	9.82	28.02	46.00	-17.98	AVG	
11		2.6970	32.31	9.84	42.15	56.00	-13.85	QP	
12		2.6970	15.70	9.84	25.54	46.00	-20.46	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Connrex


## Line

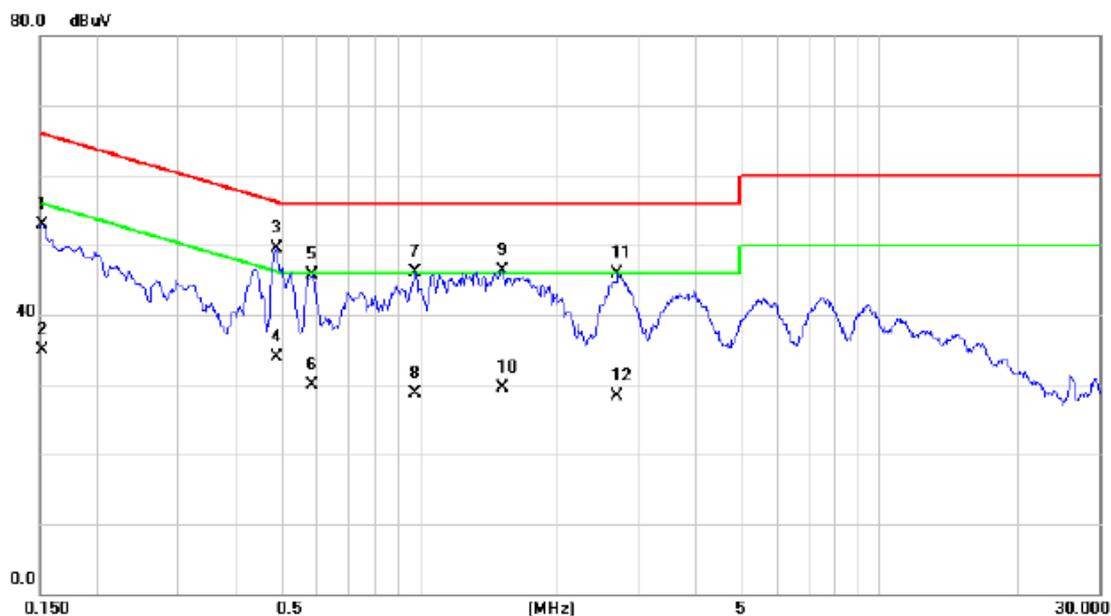

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	43.16	9.67	52.83	65.88	-13.05	QP	
2		0.1522	25.20	9.67	34.87	55.88	-21.01	AVG	
3	*	0.4897	39.66	9.82	49.48	56.17	-6.69	QP	
4		0.4897	24.00	9.82	33.82	46.17	-12.35	AVG	
5		0.5842	35.90	9.85	45.75	56.00	-10.25	QP	
6		0.5842	20.00	9.85	29.85	46.00	-16.15	AVG	
7		0.9825	36.04	9.98	46.02	56.00	-9.98	QP	
8		0.9825	18.70	9.98	28.68	46.00	-17.32	AVG	
9		1.5225	36.41	9.92	46.33	56.00	-9.67	QP	
10		1.5225	19.60	9.92	29.52	46.00	-16.48	AVG	
11		2.7015	35.93	9.90	45.83	56.00	-10.17	QP	
12		2.7015	18.50	9.90	28.40	46.00	-17.60	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Connrex


### Neutral

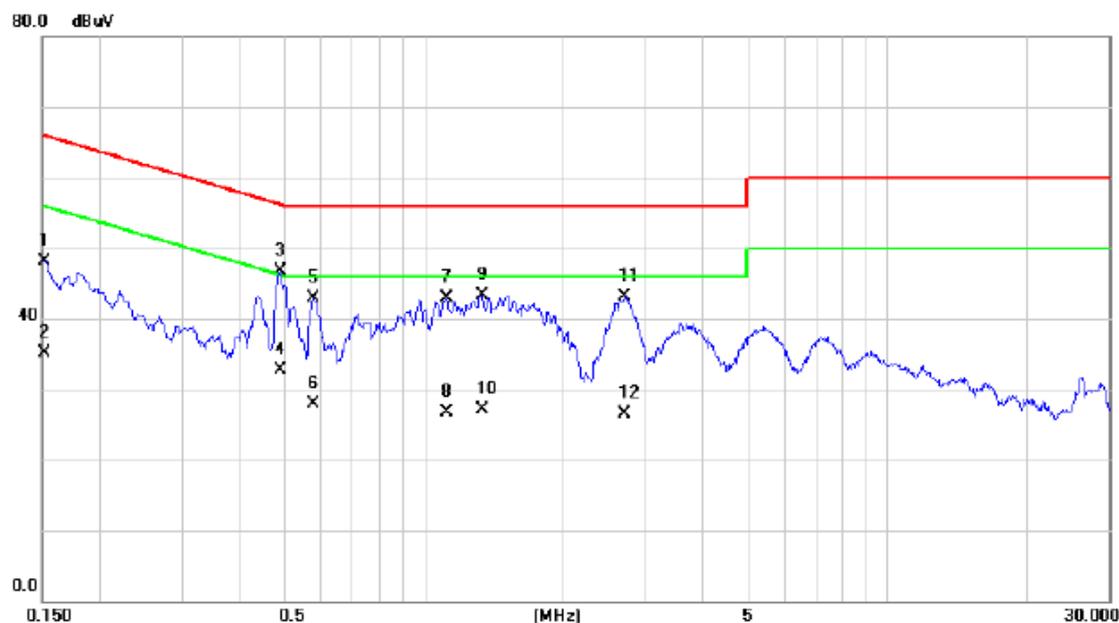

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1522	38.59	9.59	48.18	65.88	-17.70	QP	
2		0.1522	25.60	9.59	35.19	55.88	-20.69	AVG	
3	*	0.4897	37.03	9.65	46.68	56.17	-9.49	QP	
4		0.4897	23.10	9.65	32.75	46.17	-13.42	AVG	
5		0.5775	33.20	9.67	42.87	56.00	-13.13	QP	
6		0.5775	18.20	9.67	27.87	46.00	-18.13	AVG	
7		1.1220	33.10	9.80	42.90	56.00	-13.10	QP	
8		1.1220	16.90	9.80	26.70	46.00	-19.30	AVG	
9		1.3380	33.57	9.81	43.38	56.00	-12.62	QP	
10		1.3380	17.20	9.81	27.01	46.00	-18.99	AVG	
11		2.7128	33.19	9.84	43.03	56.00	-12.97	QP	
12		2.7128	16.60	9.84	26.44	46.00	-19.56	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Connrex


### Line

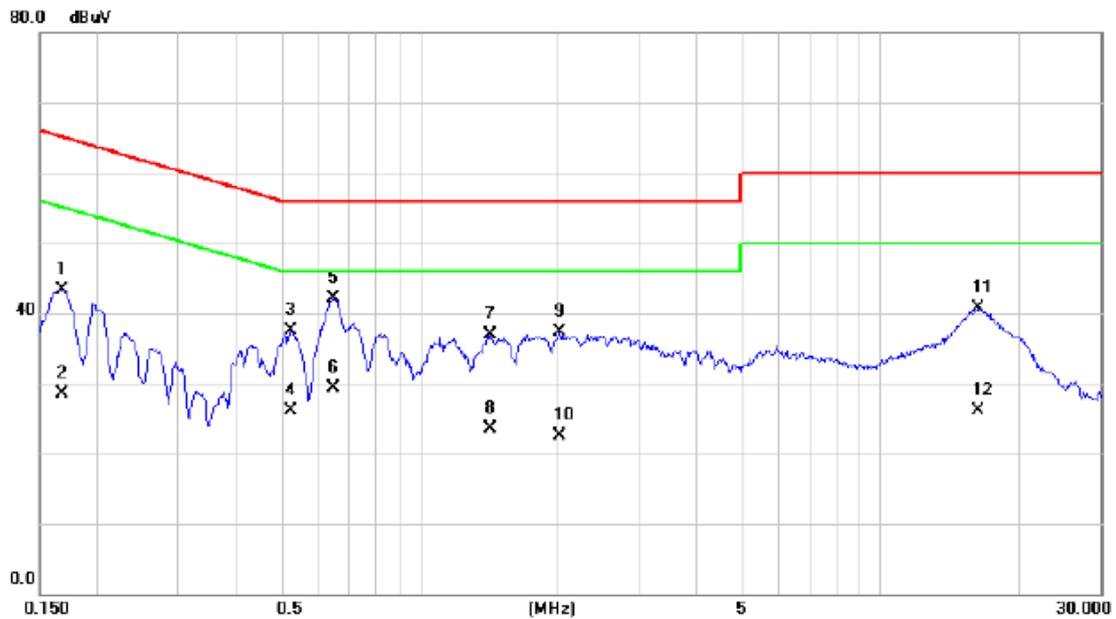

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1680	33.62	9.69	43.31	65.06	-21.75	QP	
2	0.1680	18.90	9.69	28.59	55.06	-26.47	AVG	
3	0.5257	27.73	9.83	37.56	56.00	-18.44	QP	
4	0.5257	16.20	9.83	26.03	46.00	-19.97	AVG	
5 *	0.6540	32.23	9.89	42.12	56.00	-13.88	QP	
6	0.6540	19.40	9.89	29.29	46.00	-16.71	AVG	
7	1.4325	27.02	9.94	36.96	56.00	-19.04	QP	
8	1.4325	13.50	9.94	23.44	46.00	-22.56	AVG	
9	2.0153	27.47	9.86	37.33	56.00	-18.67	QP	
10	2.0153	12.70	9.86	22.56	46.00	-23.44	AVG	
11	16.3208	30.30	10.31	40.61	60.00	-19.39	QP	
12	16.3208	15.70	10.31	26.01	50.00	-23.99	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Connrex


### Neutral

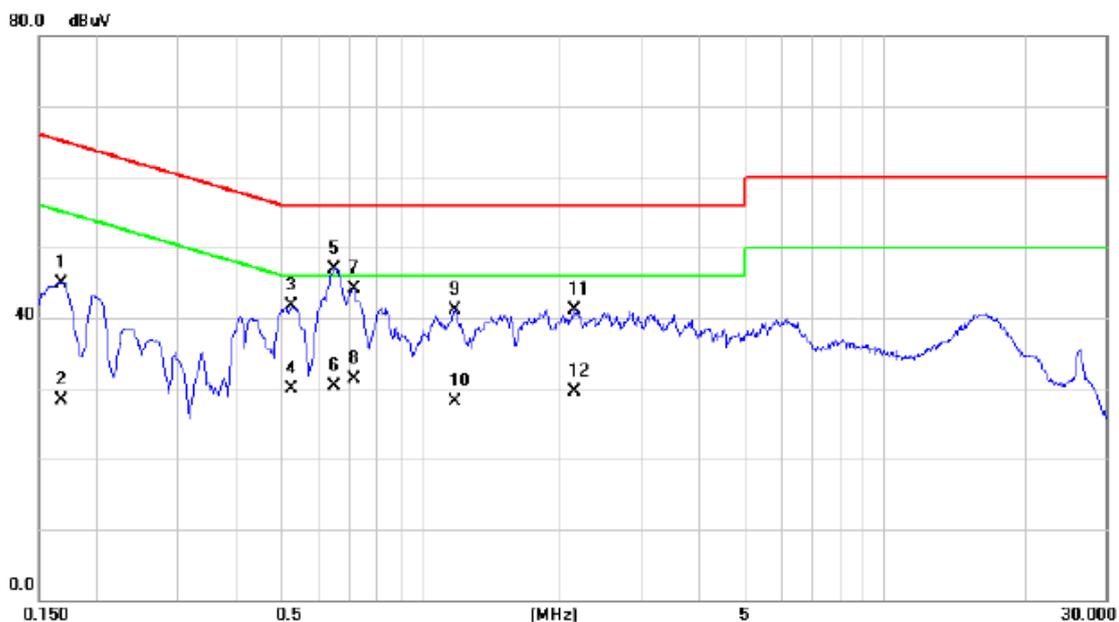

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1680	35.31	9.60	44.91	65.06	-20.15	QP	
2		0.1680	18.70	9.60	28.30	55.06	-26.76	AVG	
3		0.5280	32.05	9.65	41.70	56.00	-14.30	QP	
4		0.5280	20.30	9.65	29.95	46.00	-16.05	AVG	
5	*	0.6517	37.30	9.69	46.99	56.00	-9.01	QP	
6		0.6517	20.60	9.69	30.29	46.00	-15.71	AVG	
7		0.7170	34.43	9.70	44.13	56.00	-11.87	QP	
8		0.7170	21.60	9.70	31.30	46.00	-14.70	AVG	
9		1.1895	31.21	9.80	41.01	56.00	-14.99	QP	
10		1.1895	18.40	9.80	28.20	46.00	-17.80	AVG	
11		2.1525	31.22	9.91	41.13	56.00	-14.87	QP	
12		2.1525	19.50	9.91	29.41	46.00	-16.59	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Connrex


### Line

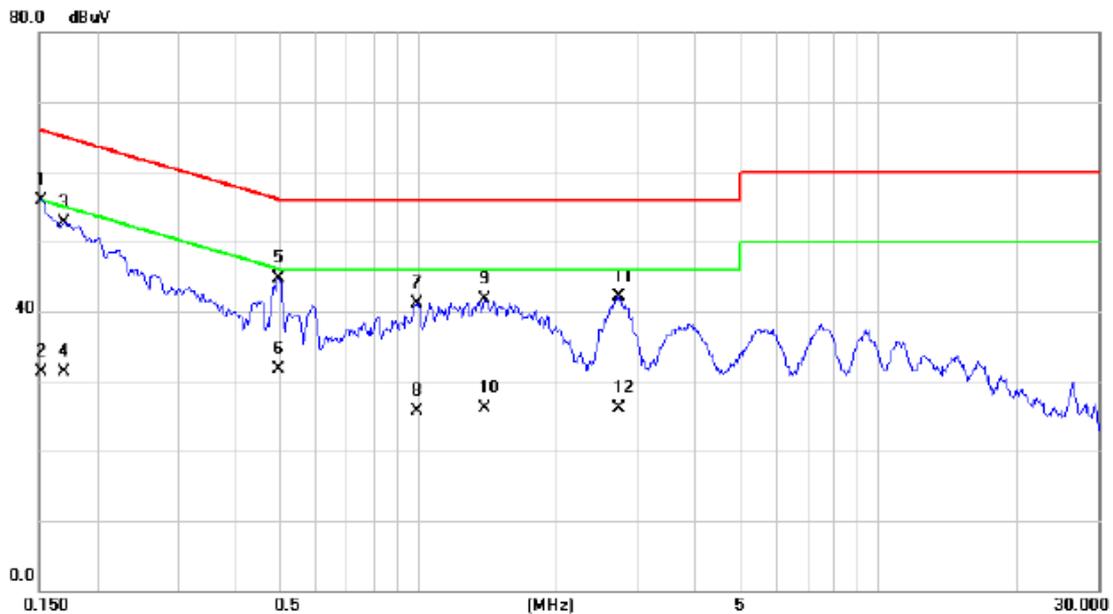

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1522	46.33	9.67	56.00	65.88	-9.88	QP	
2		0.1522	21.70	9.67	31.37	55.88	-24.51	AVG	
3		0.1703	42.96	9.69	52.65	64.95	-12.30	QP	
4		0.1703	21.70	9.69	31.39	54.95	-23.56	AVG	
5		0.4987	34.86	9.82	44.68	56.02	-11.34	QP	
6		0.4987	21.90	9.82	31.72	46.02	-14.30	AVG	
7		0.9915	31.12	9.98	41.10	56.00	-14.90	QP	
8		0.9915	15.70	9.98	25.68	46.00	-20.32	AVG	
9		1.3988	31.79	9.96	41.75	56.00	-14.25	QP	
10		1.3988	16.10	9.96	26.06	46.00	-19.94	AVG	
11		2.7263	32.14	9.89	42.03	56.00	-13.97	QP	
12		2.7263	16.20	9.89	26.09	46.00	-19.91	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Connrex


### Neutral

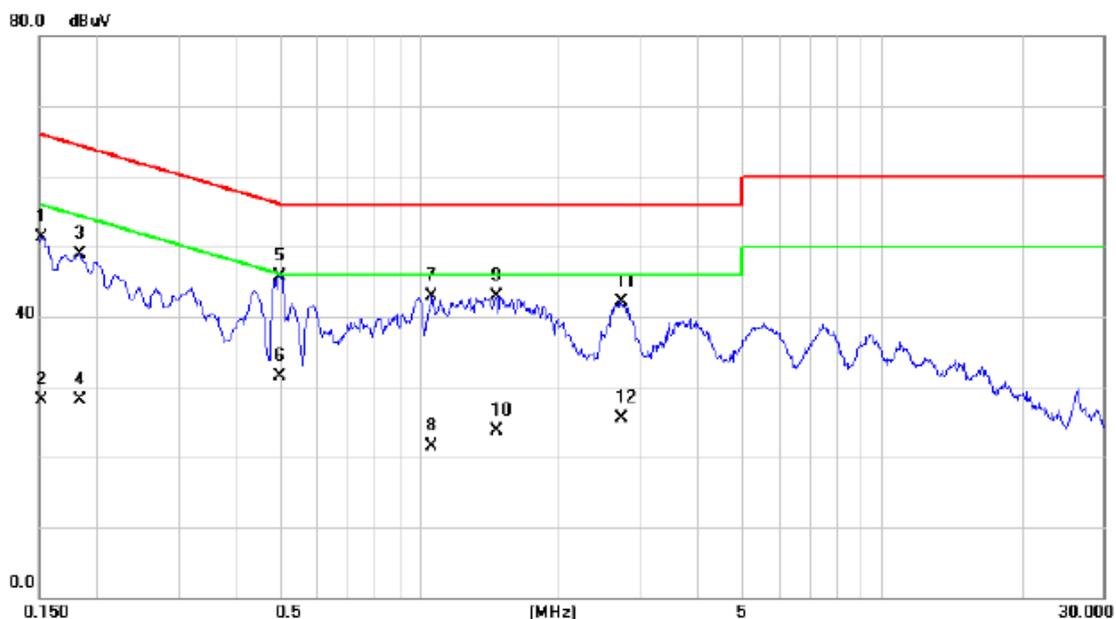

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1522	41.74	9.59	51.33	65.88	-14.55	QP	
2	0.1522	18.50	9.59	28.09	55.88	-27.79	AVG	
3	0.1838	39.33	9.60	48.93	64.31	-15.38	QP	
4	0.1838	18.60	9.60	28.20	54.31	-26.11	AVG	
5 *	0.4987	36.08	9.65	45.73	56.02	-10.29	QP	
6	0.4987	21.90	9.65	31.55	46.02	-14.47	AVG	
7	1.0611	33.08	9.79	42.87	56.00	-13.13	QP	
8	1.0611	11.70	9.79	21.49	46.00	-24.51	AVG	
9	1.4640	33.14	9.82	42.96	56.00	-13.04	QP	
10	1.4640	13.80	9.82	23.62	46.00	-22.38	AVG	
11	2.7308	32.35	9.83	42.18	56.00	-13.82	QP	
12	2.7308	15.70	9.83	25.53	46.00	-20.47	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


## Line

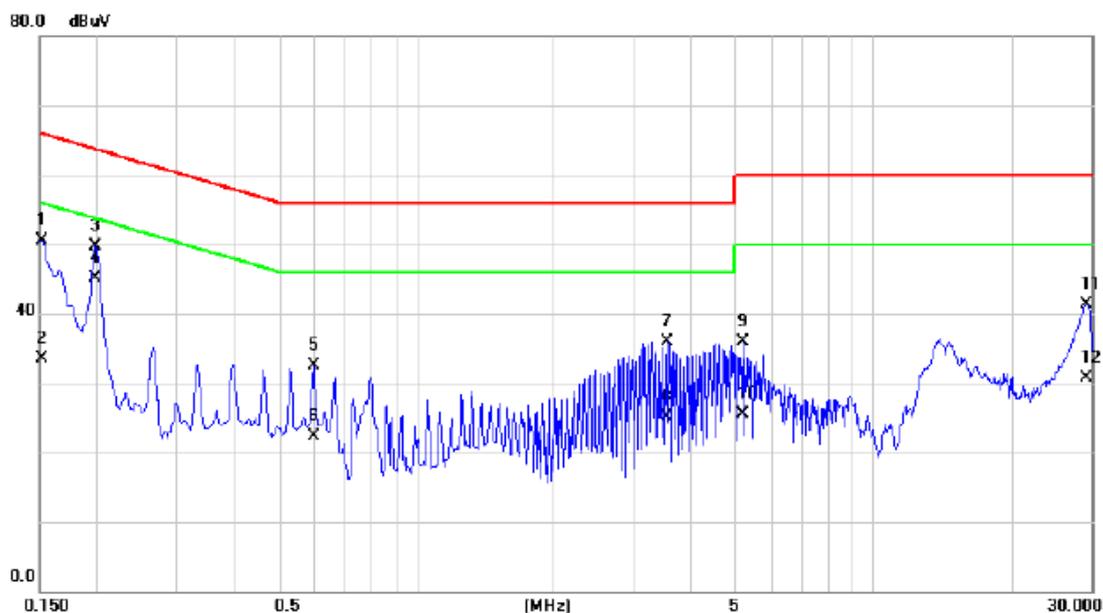

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	40.78	9.67	50.45	65.88	-15.43	QP	
2		0.1522	23.80	9.67	33.47	55.88	-22.41	AVG	
3		0.1995	39.94	9.71	49.65	63.63	-13.98	QP	
4	*	0.1995	35.30	9.71	45.01	53.63	-8.62	AVG	
5		0.5977	22.71	9.86	32.57	56.00	-23.43	QP	
6		0.5977	12.40	9.86	22.26	46.00	-23.74	AVG	
7		3.5340	26.15	9.85	36.00	56.00	-20.00	QP	
8		3.5340	15.20	9.85	25.05	46.00	-20.95	AVG	
9		5.1765	26.81	9.02	35.83	60.00	-24.17	QP	
10		5.1765	16.40	9.02	25.42	50.00	-24.58	AVG	
11		29.3685	30.80	10.55	41.35	60.00	-18.65	QP	
12		29.3685	20.20	10.55	30.75	50.00	-19.25	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


### Neutral

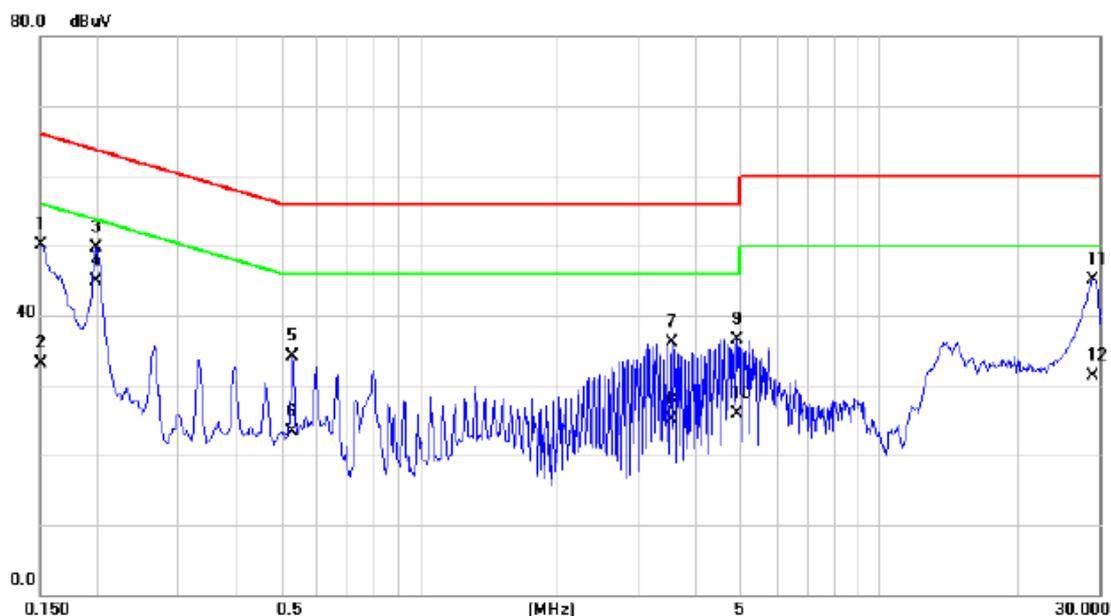

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	40.45	9.60	50.05	66.00	-15.95	QP	
2		0.1500	23.50	9.60	33.10	56.00	-22.90	AVG	
3		0.1995	40.03	9.61	49.64	63.63	-13.99	QP	
4	*	0.1995	35.20	9.61	44.81	53.63	-8.82	AVG	
5		0.5302	24.49	9.66	34.15	56.00	-21.85	QP	
6		0.5302	13.70	9.66	23.36	46.00	-22.64	AVG	
7		3.5340	26.17	9.89	36.06	56.00	-19.94	QP	
8		3.5340	15.30	9.89	25.19	46.00	-20.81	AVG	
9		4.9245	26.43	10.09	36.52	56.00	-19.48	QP	
10		4.9245	15.80	10.09	25.89	46.00	-20.11	AVG	
11		29.1705	34.67	10.53	45.20	60.00	-14.80	QP	
12		29.1705	20.70	10.53	31.23	50.00	-18.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Connrex


## Line

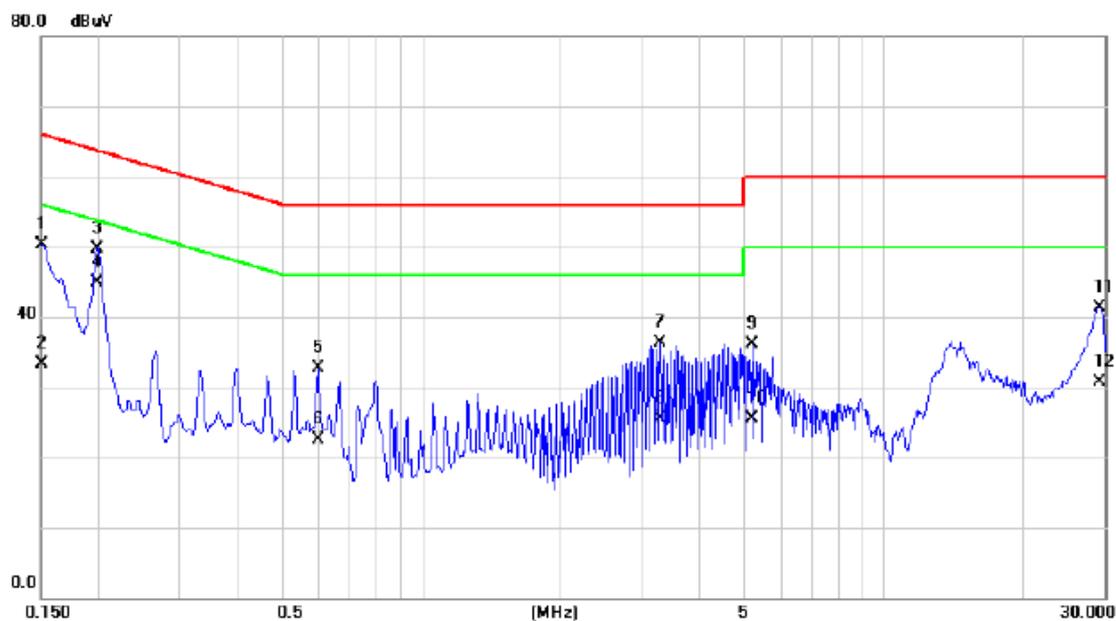

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	40.72	9.68	50.40	66.00	-15.60	QP	
2		0.1500	23.60	9.68	33.28	56.00	-22.72	AVG	
3		0.1995	40.09	9.71	49.80	63.63	-13.83	QP	
4	*	0.1995	35.20	9.71	44.91	53.63	-8.72	AVG	
5		0.5977	22.81	9.86	32.67	56.00	-23.33	QP	
6		0.5977	12.70	9.86	22.56	46.00	-23.44	AVG	
7		3.2820	26.47	9.83	36.30	56.00	-19.70	QP	
8		3.2820	15.70	9.83	25.53	46.00	-20.47	AVG	
9		5.1765	27.03	9.02	36.05	60.00	-23.95	QP	
10		5.1765	16.50	9.02	25.52	50.00	-24.48	AVG	
11		29.2380	30.76	10.55	41.31	60.00	-18.69	QP	
12		29.2380	20.10	10.55	30.65	50.00	-19.35	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Connrex


### Neutral

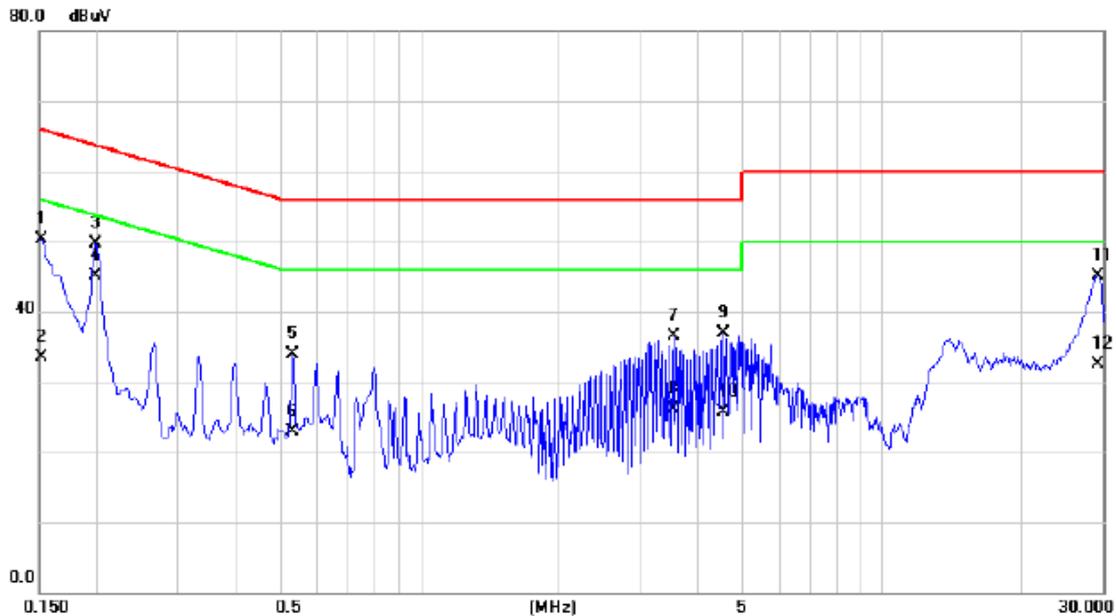

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	40.70	9.59	50.29	65.88	-15.59	QP	
2		0.1522	23.90	9.59	33.49	55.88	-22.39	AVG	
3		0.1995	40.03	9.61	49.64	63.63	-13.99	QP	
4	*	0.1995	35.50	9.61	45.11	53.63	-8.52	AVG	
5		0.5302	24.16	9.66	33.82	56.00	-22.18	QP	
6		0.5302	13.20	9.66	22.86	46.00	-23.14	AVG	
7		3.5340	26.52	9.89	36.41	56.00	-19.59	QP	
8		3.5340	16.20	9.89	26.09	46.00	-19.91	AVG	
9		4.5443	26.82	10.04	36.86	56.00	-19.14	QP	
10		4.5443	15.60	10.04	25.64	46.00	-20.36	AVG	
11		29.3033	34.57	10.53	45.10	60.00	-14.90	QP	
12		29.3033	21.90	10.53	32.43	50.00	-17.57	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Unirise


### Line

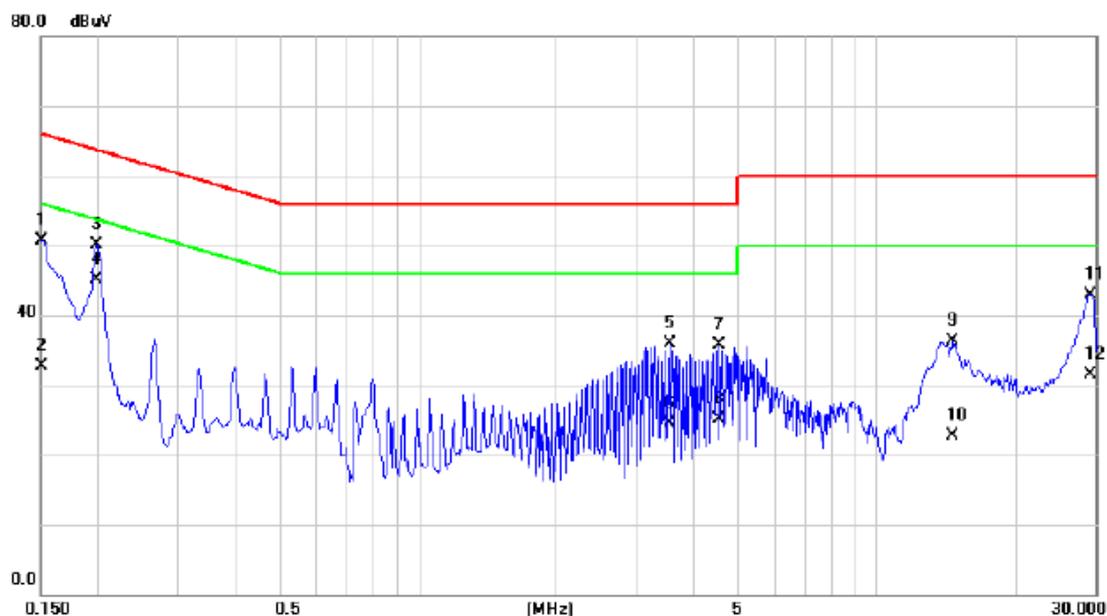

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1500	41.05	9.68	50.73	66.00	-15.27	QP	
2		0.1500	23.10	9.68	32.78	56.00	-23.22	AVG	
3		0.1995	40.49	9.71	50.20	63.63	-13.43	QP	
4	*	0.1995	35.30	9.71	45.01	53.63	-8.62	AVG	
5		3.5340	26.04	9.85	35.89	56.00	-20.11	QP	
6		3.5340	14.70	9.85	24.55	46.00	-21.45	AVG	
7		4.5443	26.26	9.36	35.62	56.00	-20.38	QP	
8		4.5443	15.80	9.36	25.16	46.00	-20.84	AVG	
9		14.7188	26.00	10.26	36.26	60.00	-23.74	QP	
10		14.7188	12.50	10.26	22.76	50.00	-27.24	AVG	
11		29.2403	32.41	10.55	42.96	60.00	-17.04	QP	
12		29.2403	20.90	10.55	31.45	50.00	-18.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Unirise

### Neutral

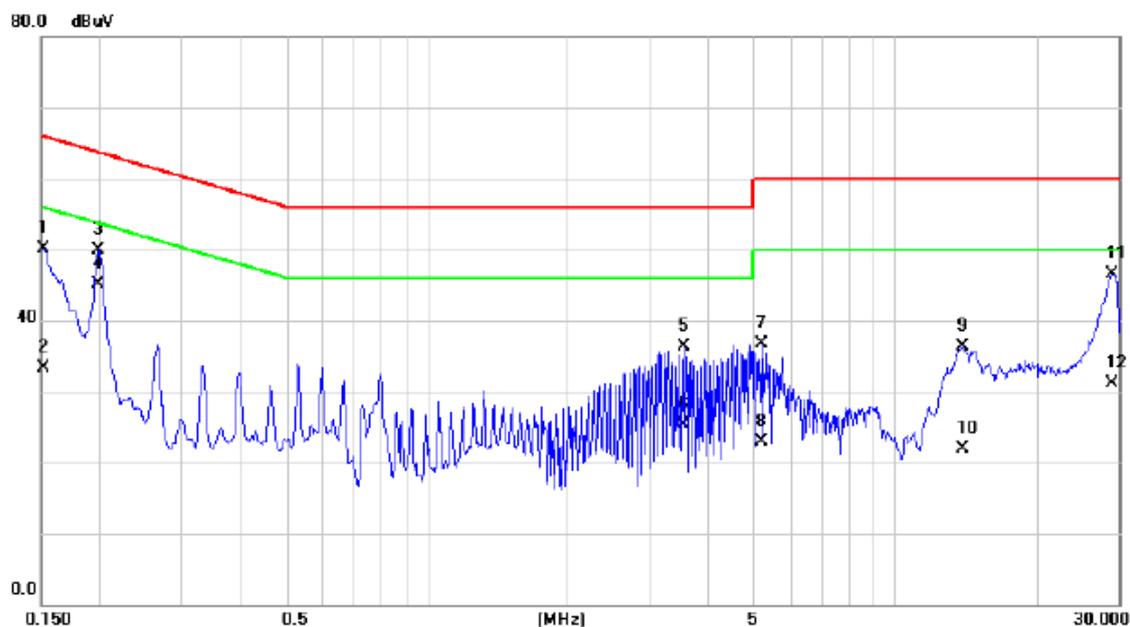


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1522	40.56	9.59	50.15	65.88	-15.73	QP	
2		0.1522	23.80	9.59	33.39	55.88	-22.49	AVG	
3		0.1995	40.23	9.61	49.84	63.63	-13.79	QP	
4	*	0.1995	35.40	9.61	45.01	53.63	-8.62	AVG	
5		3.5340	26.47	9.89	36.36	56.00	-19.64	QP	
6		3.5340	15.40	9.89	25.29	46.00	-20.71	AVG	
7		5.1765	26.65	10.10	36.75	60.00	-23.25	QP	
8		5.1765	12.90	10.10	23.00	50.00	-27.00	AVG	
9		13.9245	26.09	10.22	36.31	60.00	-23.69	QP	
10		13.9245	11.70	10.22	21.92	50.00	-28.08	AVG	
11		29.1075	35.92	10.53	46.45	60.00	-13.55	QP	
12		29.1075	20.60	10.53	31.13	50.00	-18.87	AVG	

**ATTACHMENT B - RADIATED EMISSION (30MHZ TO 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Note:	Adapter: HK +USB Cable: PANG NGAI


## Vertical

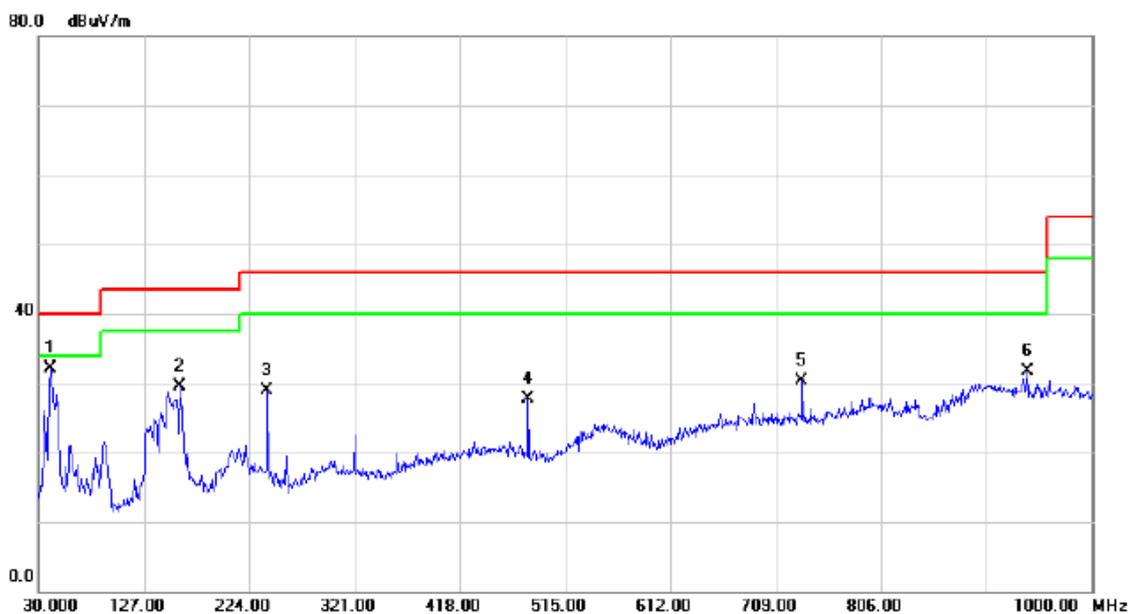

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40.6700	45.96	-13.87	32.09	40.00	-7.91	QP	
2		159.9800	41.93	-12.42	29.51	43.50	-13.99	QP	
3		240.4900	43.09	-14.15	28.94	46.00	-17.06	QP	
4		481.0500	36.92	-9.26	27.66	46.00	-18.34	QP	
5		733.2500	34.76	-4.46	30.30	46.00	-15.70	QP	
6		940.8300	31.78	-0.08	31.70	46.00	-14.30	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Note:	Adapter: HK +USB Cable: PANG NGAI


## Horizontal

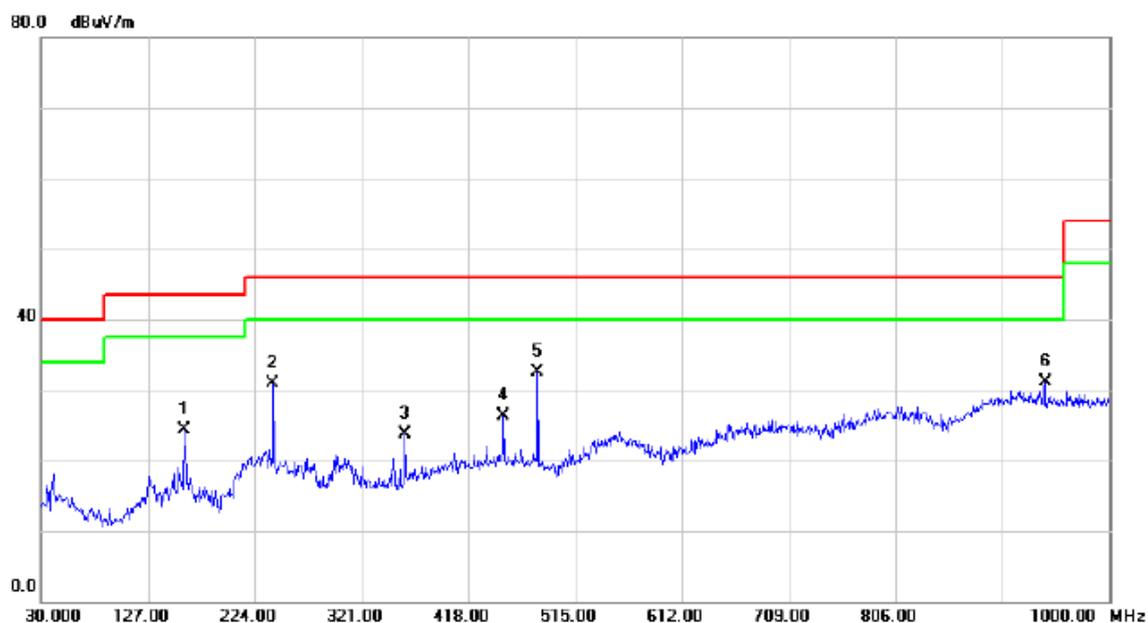

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		159.9800	36.79	-12.42	24.37	43.50	-19.13	QP	
2		240.4900	45.05	-14.15	30.90	46.00	-15.10	QP	
3		360.7700	34.52	-10.90	23.62	46.00	-22.38	QP	
4		450.0100	34.26	-8.05	26.21	46.00	-19.79	QP	
5	*	481.0500	41.67	-9.26	32.41	46.00	-13.59	QP	
6		941.8000	31.14	-0.09	31.05	46.00	-14.95	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Note:	Adapter: HK +USB Cable: PANG NGAI


## Vertical

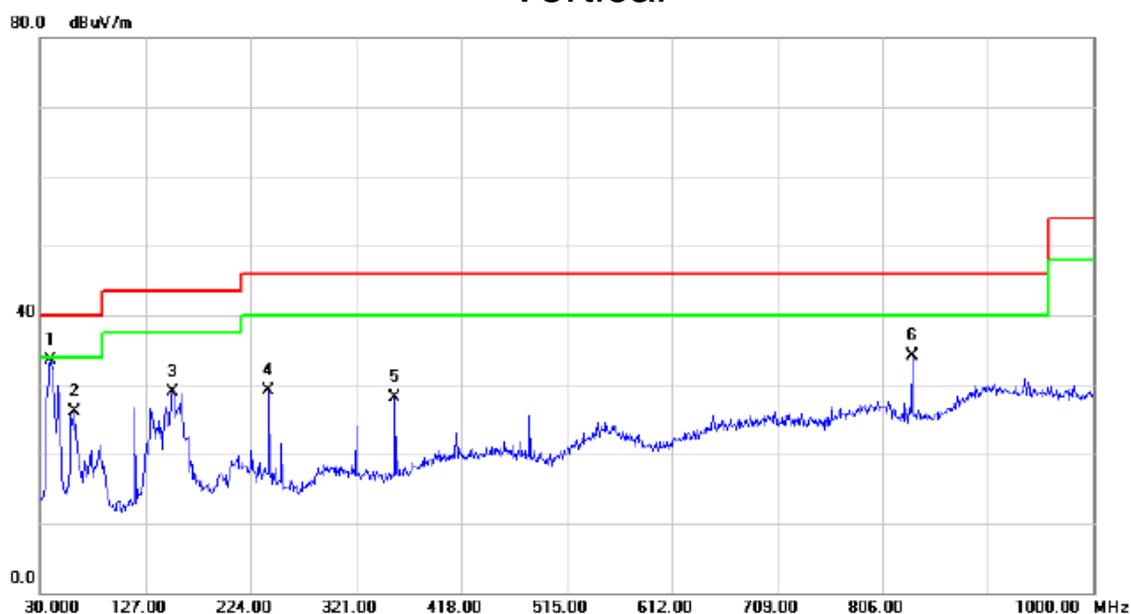

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	47.48	-13.98	33.50	40.00	-6.50	QP	
2		62.0100	40.90	-14.73	26.17	40.00	-13.83	QP	
3		152.2200	41.83	-12.88	28.95	43.50	-14.55	QP	
4		240.4900	43.26	-14.15	29.11	46.00	-16.89	QP	
5		356.8900	39.19	-11.05	28.14	46.00	-17.86	QP	
6		833.1600	37.39	-3.38	34.01	46.00	-11.99	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Note:	Adapter: HK +USB Cable: PANG NGAI


## Horizontal

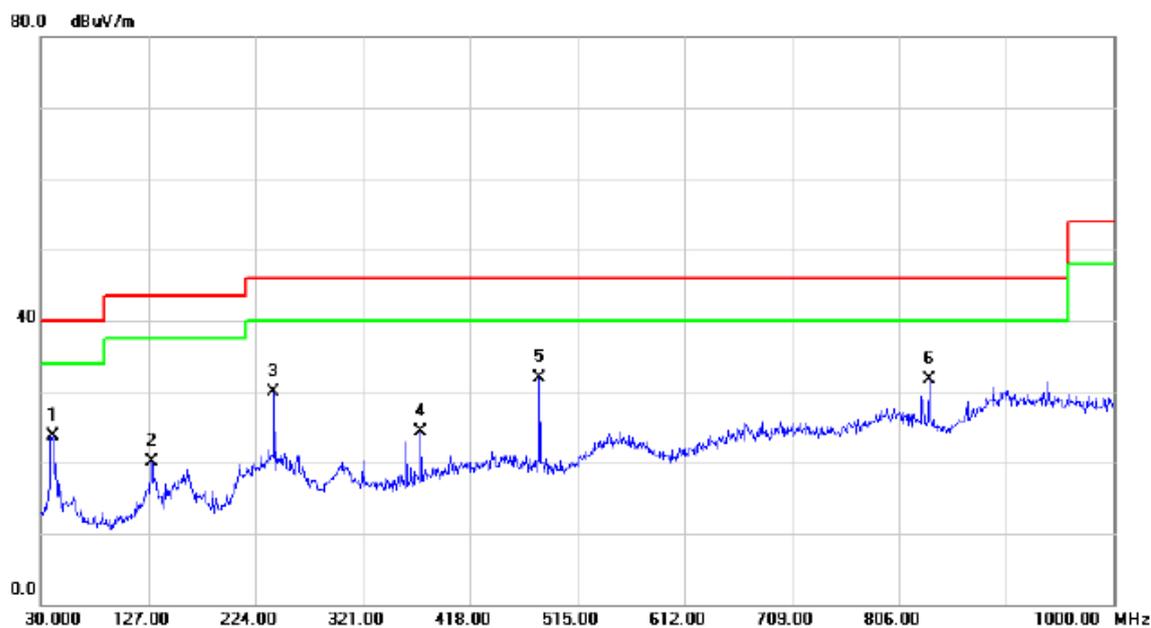

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		40.6700	37.60	-13.87	23.73	40.00	-16.27	QP	
2		129.9100	33.20	-13.09	20.11	43.50	-23.39	QP	
3		240.4900	44.06	-14.15	29.91	46.00	-16.09	QP	
4		373.3800	34.66	-10.39	24.27	46.00	-21.73	QP	
5	*	481.0500	41.17	-9.26	31.91	46.00	-14.09	QP	
6		833.1600	35.08	-3.38	31.70	46.00	-14.30	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: PANG NGAI


## Vertical

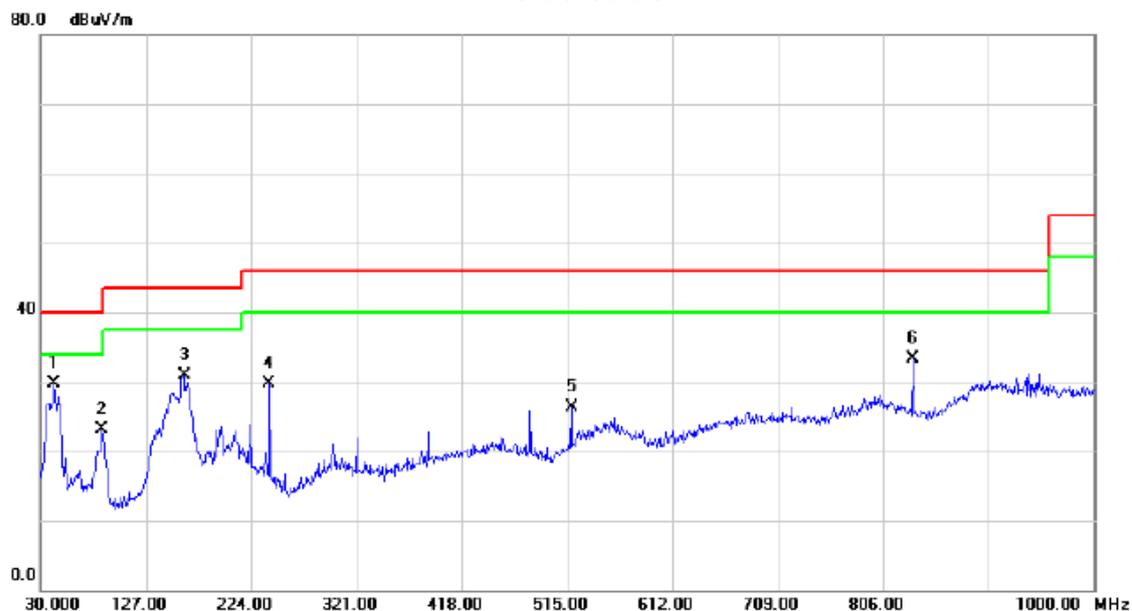

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	42.6100	43.39	-13.62	29.77	40.00	-10.23	QP	
2		86.2600	39.92	-16.80	23.12	40.00	-16.88	QP	
3		161.9200	43.36	-12.52	30.84	43.50	-12.66	QP	
4		240.4900	43.83	-14.15	29.68	46.00	-16.32	QP	
5		518.8800	34.47	-8.16	26.31	46.00	-19.69	QP	
6		834.1300	36.78	-3.42	33.36	46.00	-12.64	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: PANG NGAI

## Horizontal

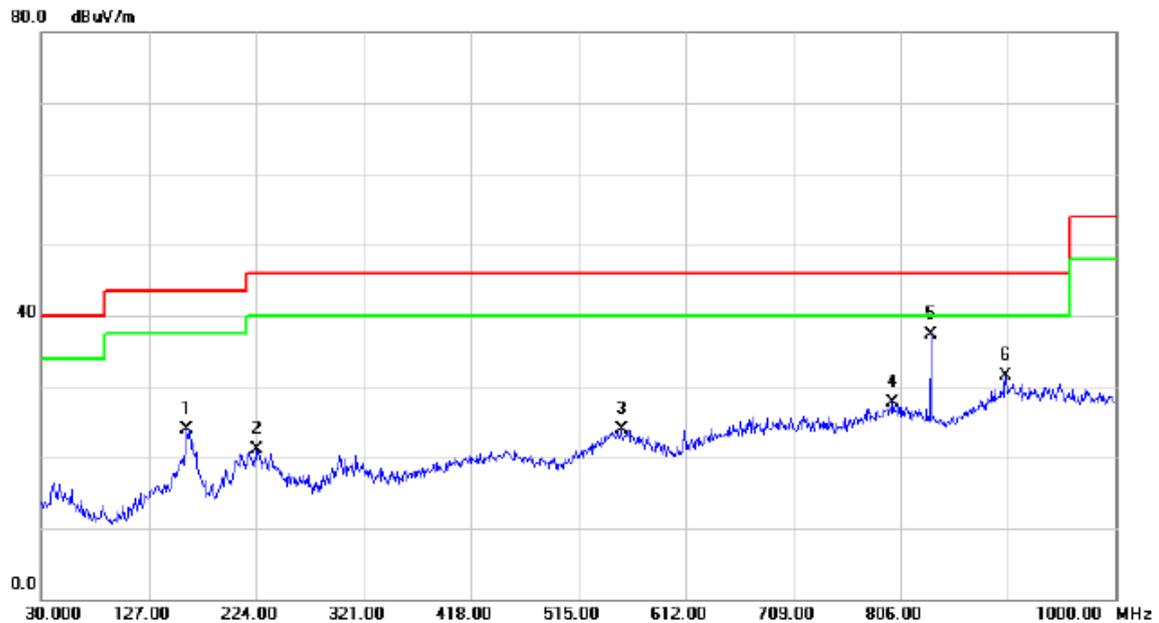

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		160.9500	36.47	-12.47	24.00	43.50	-19.50	QP	
2		224.9700	35.52	-14.33	21.19	46.00	-24.81	QP	
3		553.8000	29.31	-5.35	23.96	46.00	-22.04	QP	
4		799.2100	29.91	-2.11	27.80	46.00	-18.20	QP	
5	*	833.1600	40.65	-3.38	37.27	46.00	-8.73	QP	
6		901.0600	31.03	0.44	31.47	46.00	-14.53	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: PANG NGAI


## Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39.7000	47.61	-13.98	33.63	40.00	-6.37	QP	
2		61.0400	42.48	-14.63	27.85	40.00	-12.15	QP	
3		150.2800	43.66	-13.00	30.66	43.50	-12.84	QP	
4		240.4900	39.81	-14.15	25.66	46.00	-20.34	QP	
5		481.0500	35.55	-9.26	26.29	46.00	-19.71	QP	
6		833.1600	42.01	-3.38	38.63	46.00	-7.37	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: PANG NGAI


## Horizontal

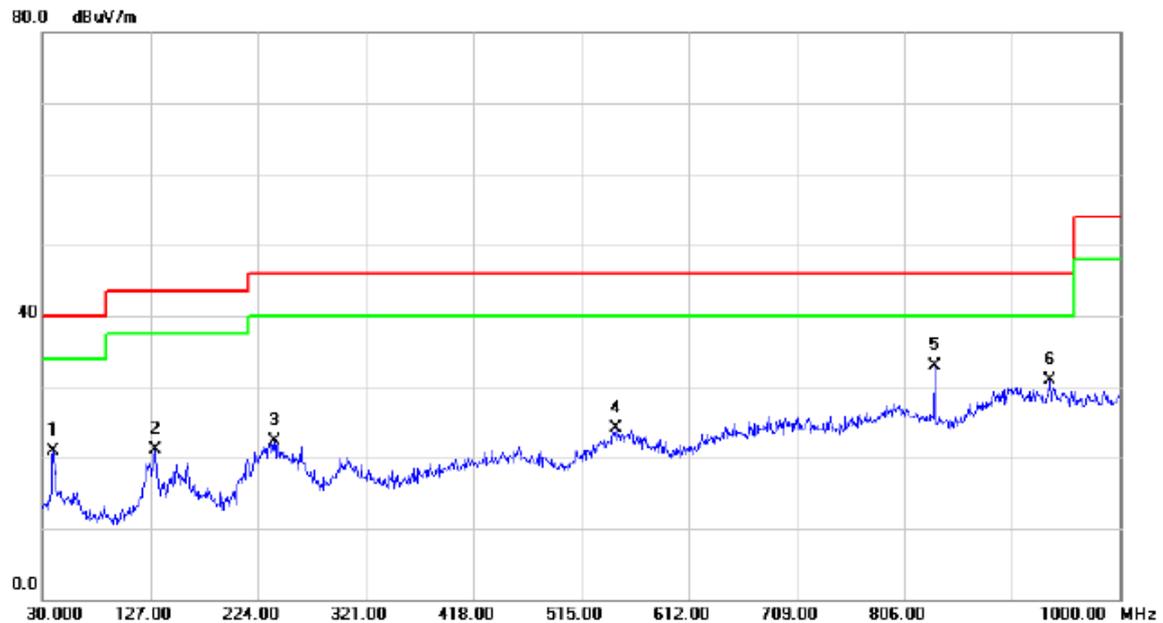

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		39.7000	34.94	-13.98	20.96	40.00	-19.04	QP	
2		130.8800	34.28	-13.16	21.12	43.50	-22.38	QP	
3		238.5500	36.53	-14.17	22.36	46.00	-23.64	QP	
4		546.0400	29.63	-5.52	24.11	46.00	-21.89	QP	
5	*	833.1600	36.36	-3.38	32.98	46.00	-13.02	QP	
6		936.9500	30.91	-0.02	30.89	46.00	-15.11	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: PANG NGAI

## Vertical

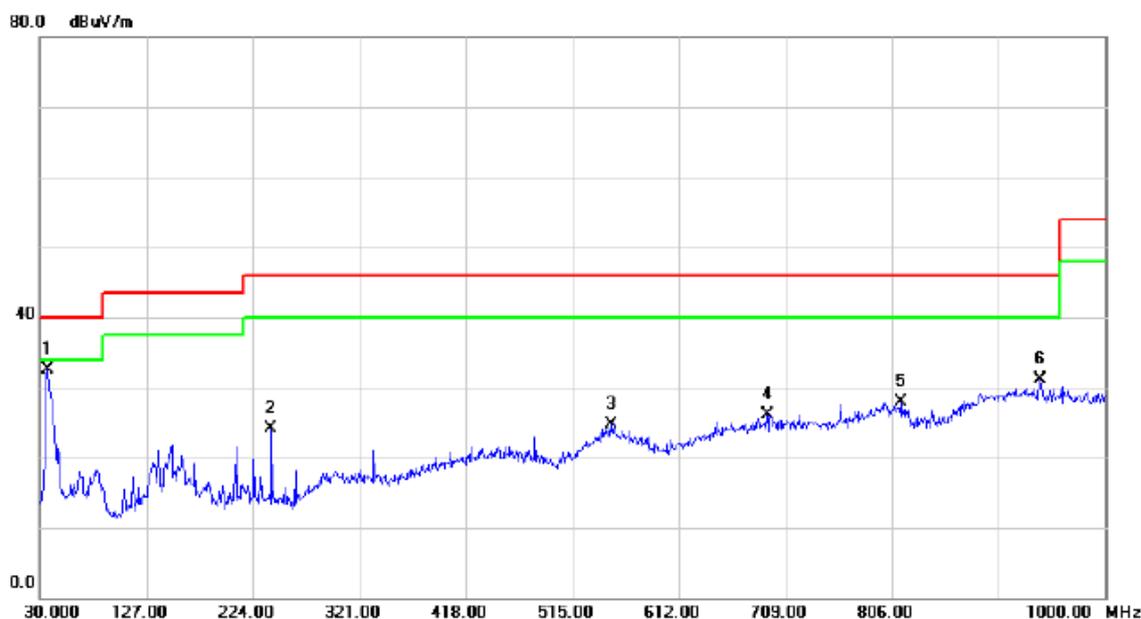

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	36.7900	46.62	-14.17	32.45	40.00	-7.55	QP	
2		240.4900	38.33	-14.15	24.18	46.00	-21.82	QP	
3		549.9200	29.93	-5.15	24.78	46.00	-21.22	QP	
4		692.5100	30.40	-4.33	26.07	46.00	-19.93	QP	
5		814.7300	30.62	-2.65	27.97	46.00	-18.03	QP	
6		940.8300	31.26	-0.08	31.18	46.00	-14.82	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: PANG NGAI


## Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		191.0200	41.42	-14.48	26.94	43.50	-16.56	QP	
2		448.0700	29.12	-8.10	21.02	46.00	-24.98	QP	
3		553.8000	29.44	-5.35	24.09	46.00	-21.91	QP	
4		713.8500	29.86	-4.31	25.55	46.00	-20.45	QP	
5		802.1200	29.71	-2.15	27.56	46.00	-18.44	QP	
6	*	940.8300	30.05	-0.08	29.97	46.00	-16.03	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


## Vertical

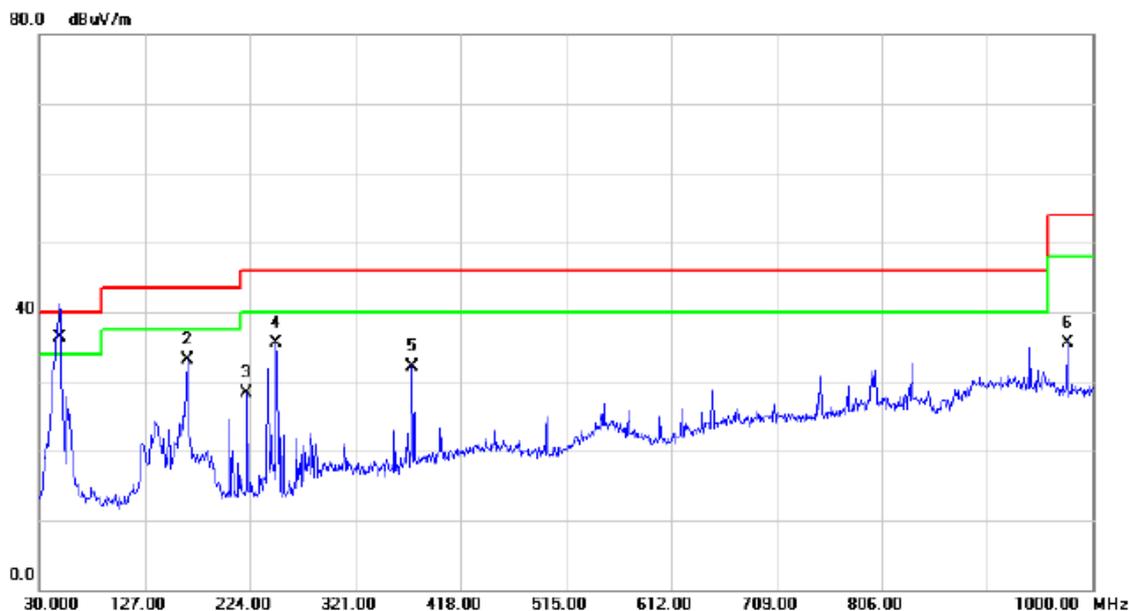

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	48.4300	50.17	-13.80	36.37	40.00	-3.63	QP	
2		165.8000	45.77	-12.68	33.09	43.50	-10.41	QP	
3		221.0900	42.62	-14.31	28.31	46.00	-17.69	QP	
4		248.2500	49.68	-14.27	35.41	46.00	-10.59	QP	
5		373.3800	42.59	-10.39	32.20	46.00	-13.80	QP	
6		976.7200	35.76	-0.28	35.48	54.00	-18.52	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


## Horizontal

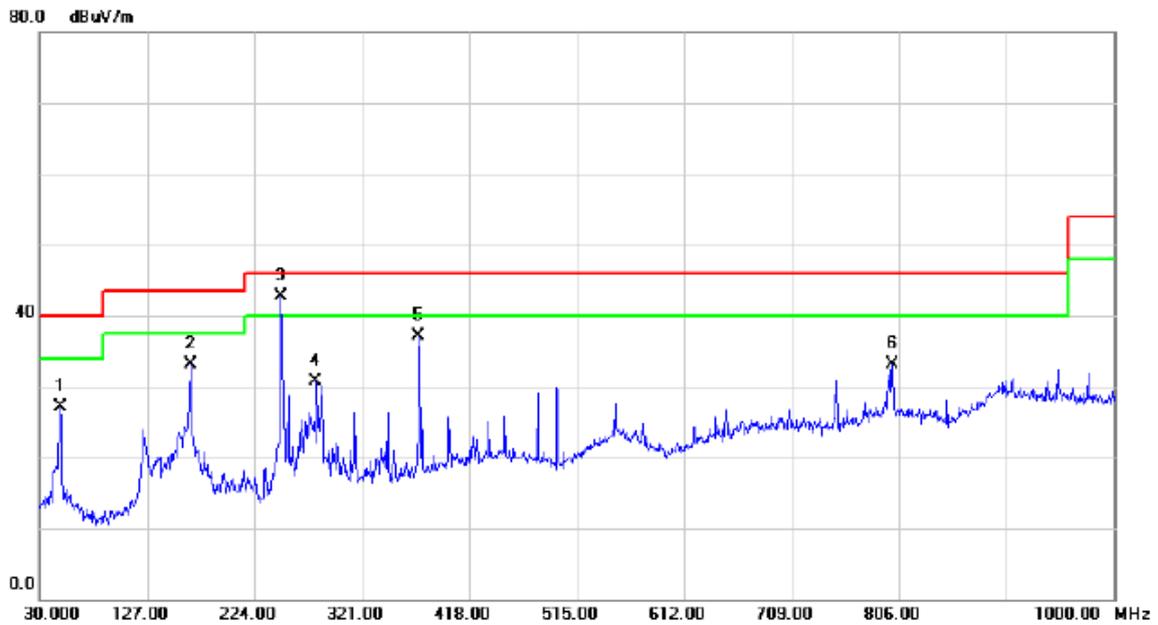

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		48.4300	40.84	-13.80	27.04	40.00	-12.96	QP	
2		165.8000	45.85	-12.68	33.17	43.50	-10.33	QP	
3	*	248.2500	57.06	-14.27	42.79	46.00	-3.21	QP	
4		279.2900	42.95	-12.34	30.61	46.00	-15.39	QP	
5		372.4100	47.56	-10.43	37.13	46.00	-8.87	QP	
6		800.1800	35.19	-2.08	33.11	46.00	-12.89	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Connrex


## Vertical

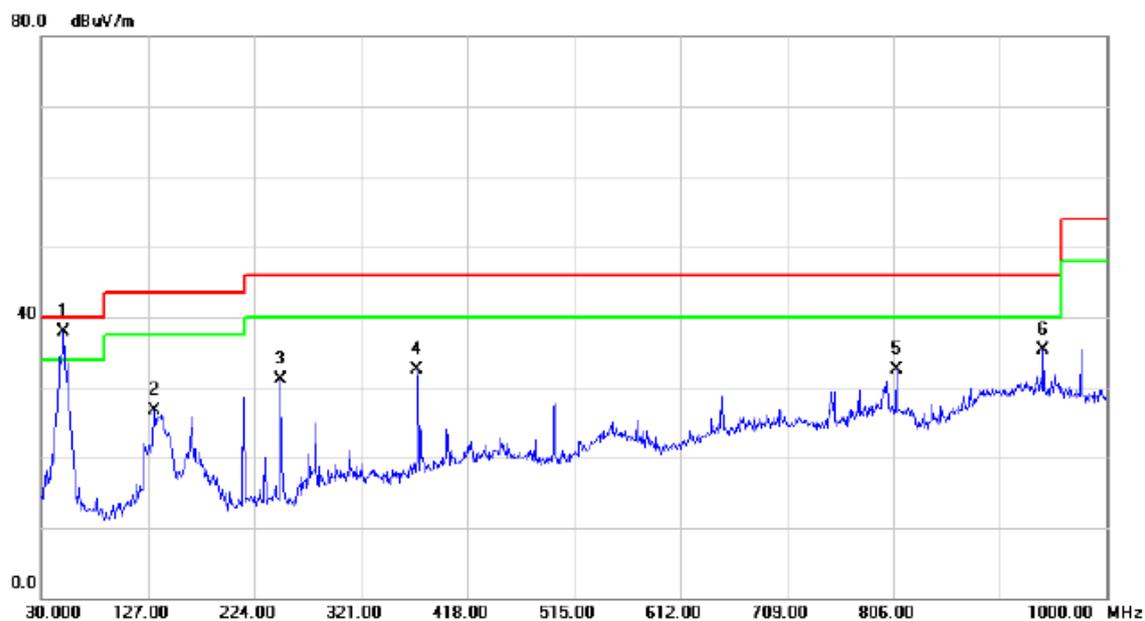

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	50.3700	51.82	-13.82	38.00	40.00	-2.00	QP	
2		132.8200	40.02	-13.36	26.66	43.50	-16.84	QP	
3		248.2500	45.35	-14.27	31.08	46.00	-14.92	QP	
4		372.4100	43.01	-10.43	32.58	46.00	-13.42	QP	
5		808.9100	34.84	-2.43	32.41	46.00	-13.59	QP	
6		942.7700	35.43	-0.11	35.32	46.00	-10.68	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Connrex


## Horizontal

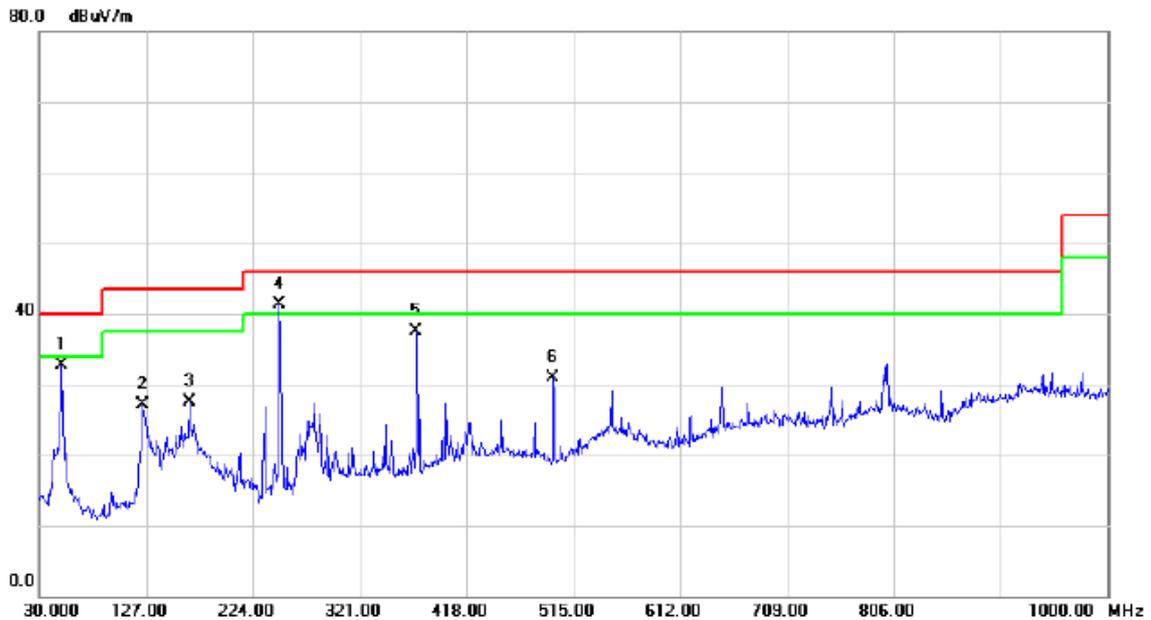

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		50.3700	46.52	-13.82	32.70	40.00	-7.30	QP	
2		124.0900	40.70	-13.63	27.07	43.50	-16.43	QP	
3		165.8000	40.20	-12.68	27.52	43.50	-15.98	QP	
4	*	248.2500	55.52	-14.27	41.25	46.00	-4.75	QP	
5		372.4100	47.87	-10.43	37.44	46.00	-8.56	QP	
6		496.5700	40.83	-9.86	30.97	46.00	-15.03	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Unirise


### Vertical

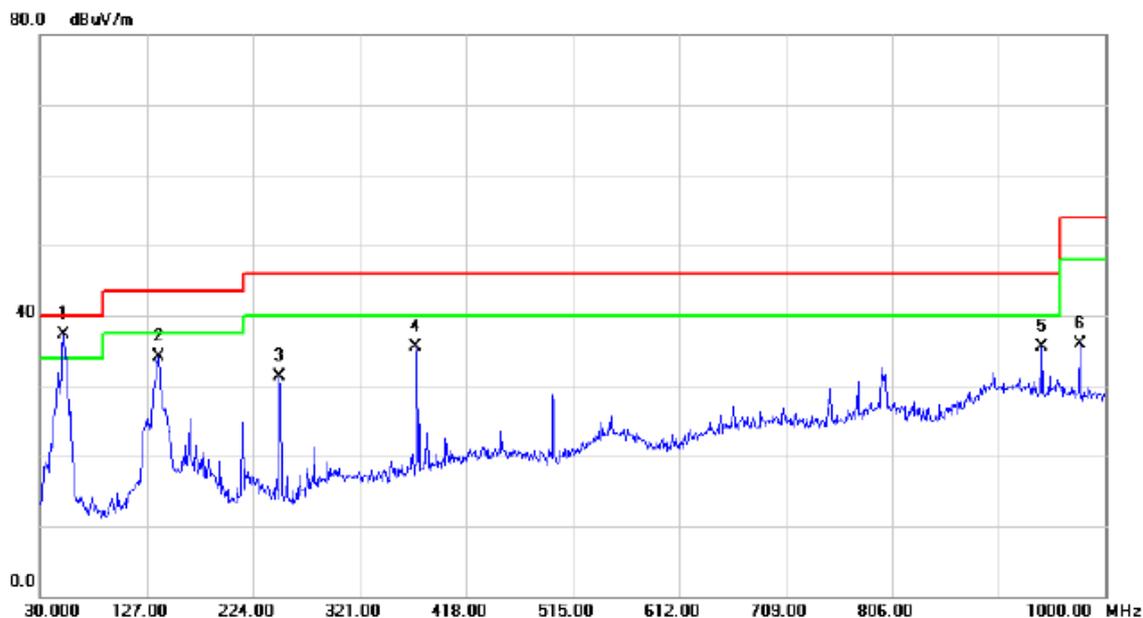

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	51.3400	51.14	-13.80	37.34	40.00	-2.66	QP	
2		137.6700	47.94	-13.85	34.09	43.50	-9.41	QP	
3		248.2500	45.62	-14.27	31.35	46.00	-14.65	QP	
4		372.4100	45.89	-10.43	35.46	46.00	-10.54	QP	
5		942.7700	35.64	-0.11	35.53	46.00	-10.47	QP	
6		976.7200	36.20	-0.28	35.92	54.00	-18.08	QP	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Unirise

## Horizontal

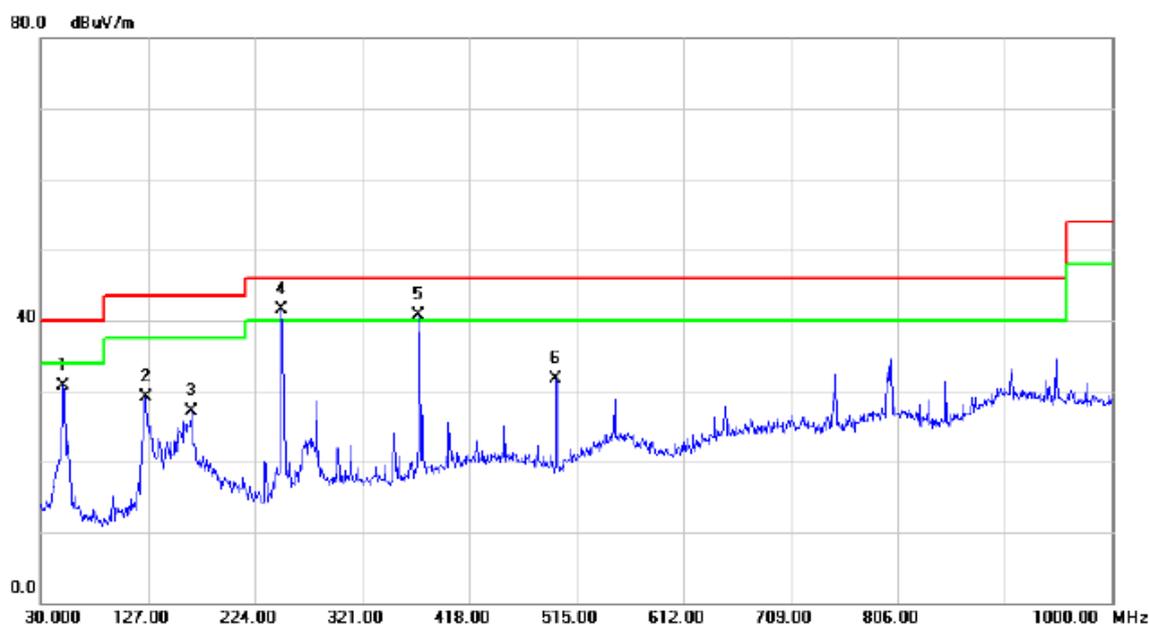


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		50.3700	44.55	-13.82	30.73	40.00	-9.27	QP	
2		125.0600	42.67	-13.54	29.13	43.50	-14.37	QP	
3		166.7700	39.85	-12.73	27.12	43.50	-16.38	QP	
4	*	248.2500	55.68	-14.27	41.41	46.00	-4.59	QP	
5	!	372.4100	51.15	-10.43	40.72	46.00	-5.28	QP	
6		496.5700	41.48	-9.86	31.62	46.00	-14.38	QP	

## **ATTACHMENT C - RADIATED EMISSION (ABOVE 1000MHZ)**

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Note:	Adapter: Phihong +USB Cable: Connrex


## Vertical

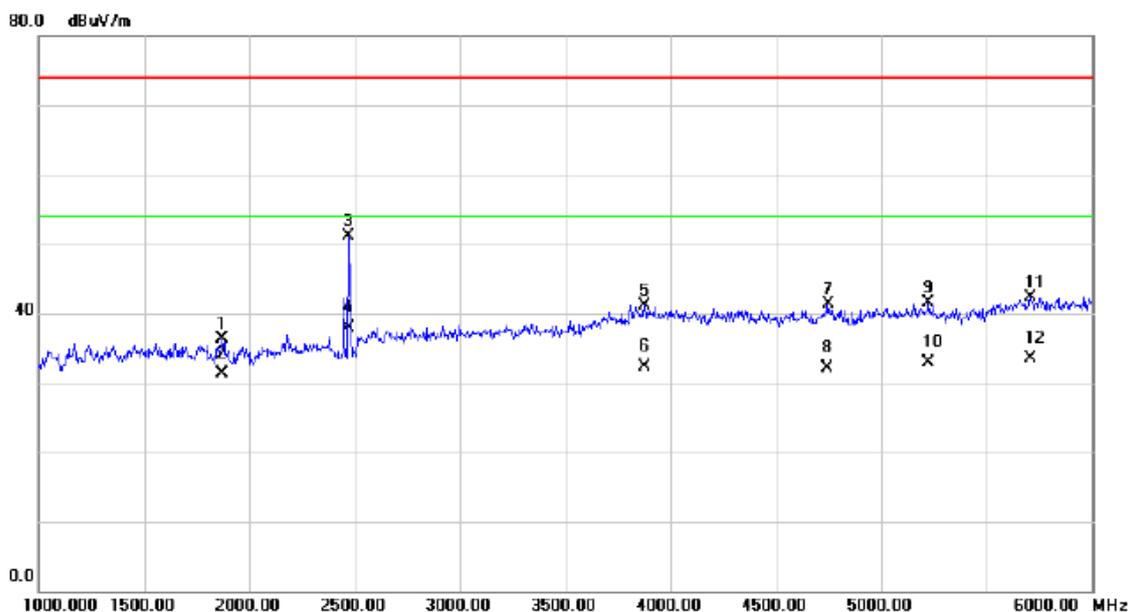

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1872.500	39.80	-3.51	36.29	74.00	-37.71	peak	
2		1872.500	34.76	-3.51	31.25	54.00	-22.75	AVG	
3		2472.500	51.58	-0.56	51.02	74.00	-22.98	peak	
4	*	2472.500	38.52	-0.56	37.96	54.00	-16.04	AVG	
5		3875.000	36.25	4.95	41.20	74.00	-32.80	peak	
6		3875.000	27.27	4.95	32.22	54.00	-21.78	AVG	
7		4747.500	34.25	6.98	41.23	74.00	-32.77	peak	
8		4747.500	25.14	6.98	32.12	54.00	-21.88	AVG	
9		5225.000	33.20	8.37	41.57	74.00	-32.43	peak	
10		5225.000	24.51	8.37	32.88	54.00	-21.12	AVG	
11		5712.500	32.69	9.57	42.26	74.00	-31.74	peak	
12		5712.500	24.01	9.57	33.58	54.00	-20.42	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Note:	Adapter: Phihong +USB Cable: Connrex


## Horizontal

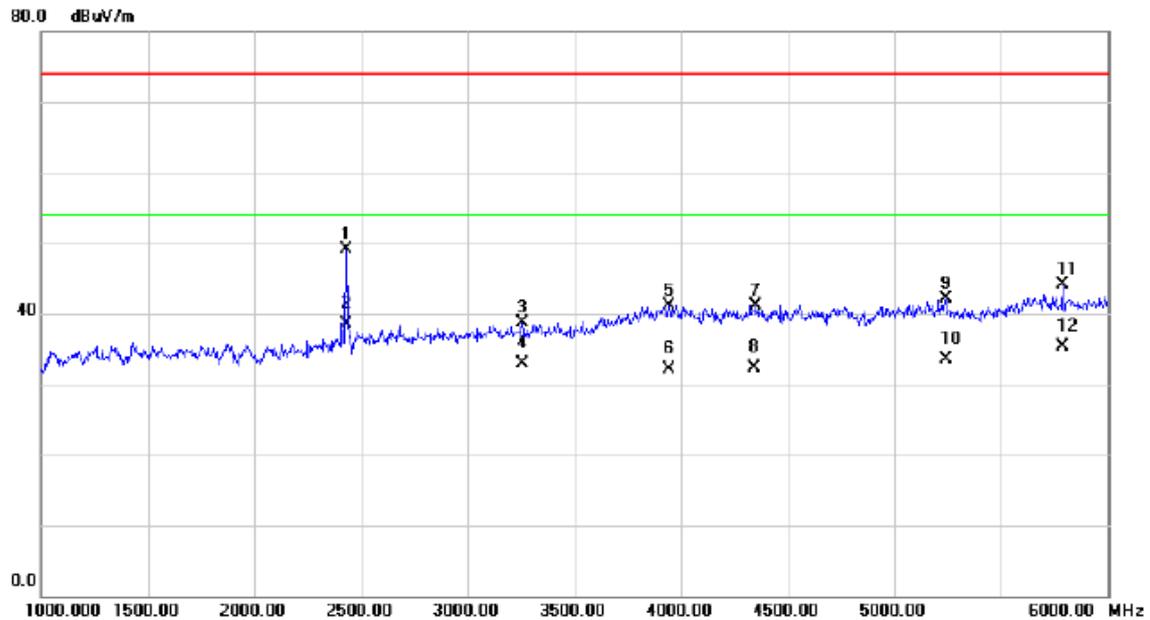

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2430.000	49.96	-0.81	49.15	74.00	-24.85	peak	
2	*	2430.000	39.36	-0.81	38.55	54.00	-15.45	AVG	
3		3255.000	36.53	2.16	38.69	74.00	-35.31	peak	
4		3255.000	30.69	2.16	32.85	54.00	-21.15	AVG	
5		3945.000	35.79	5.36	41.15	74.00	-32.85	peak	
6		3945.000	26.78	5.36	32.14	54.00	-21.86	AVG	
7		4347.500	35.08	6.03	41.11	74.00	-32.89	peak	
8		4347.500	26.32	6.03	32.35	54.00	-21.65	AVG	
9		5242.500	33.58	8.43	42.01	74.00	-31.99	peak	
10		5242.500	25.02	8.43	33.45	54.00	-20.55	AVG	
11		5790.000	34.32	9.74	44.06	74.00	-29.94	peak	
12		5790.000	25.49	9.74	35.23	54.00	-18.77	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Note:	Adapter: Phihong +USB Cable: Connrex


## Vertical

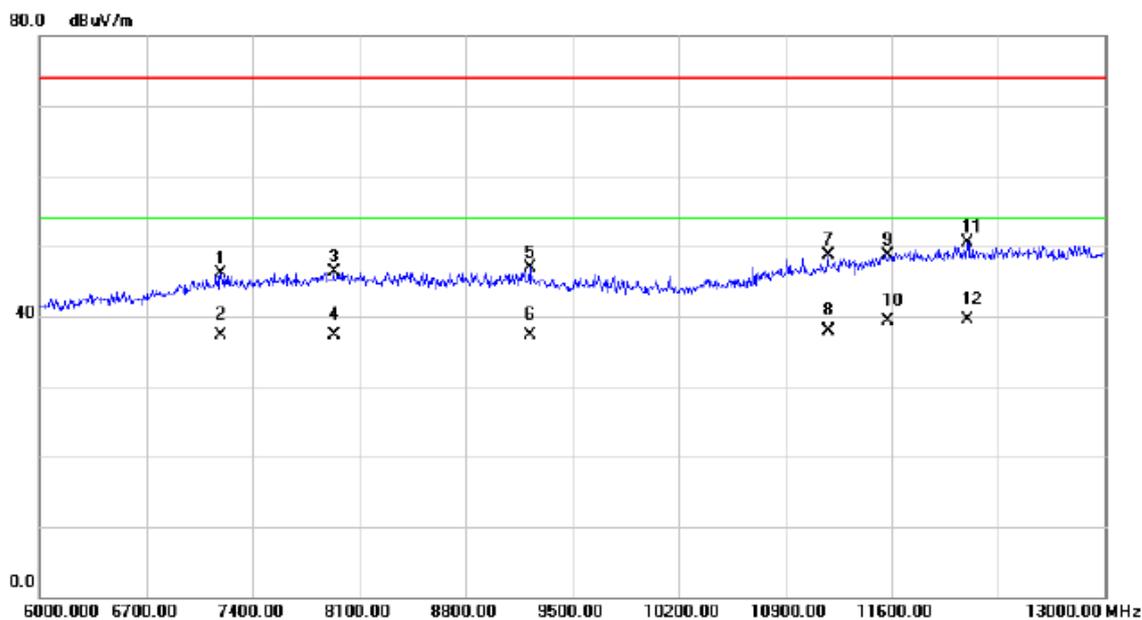

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7193.500	32.72	13.33	46.05	74.00	-27.95	peak	
2		7193.500	23.91	13.33	37.24	54.00	-16.76	AVG	
3		7935.500	32.15	14.23	46.38	74.00	-27.62	peak	
4		7935.500	23.09	14.23	37.32	54.00	-16.68	AVG	
5		9223.500	32.44	14.49	46.93	74.00	-27.07	peak	
6		9223.500	22.80	14.49	37.29	54.00	-16.71	AVG	
7		11183.500	30.96	17.75	48.71	74.00	-25.29	peak	
8		11183.500	20.21	17.75	37.96	54.00	-16.04	AVG	
9		11579.000	29.65	19.14	48.79	74.00	-25.21	peak	
10		11579.000	20.07	19.14	39.21	54.00	-14.79	AVG	
11		12097.000	30.00	20.42	50.42	74.00	-23.58	peak	
12	*	12097.000	19.03	20.42	39.45	54.00	-14.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+2.4G WIFI+BT+GPS+playing+Earphone
Note:	Adapter: Phihong +USB Cable: Connrex


## Horizontal

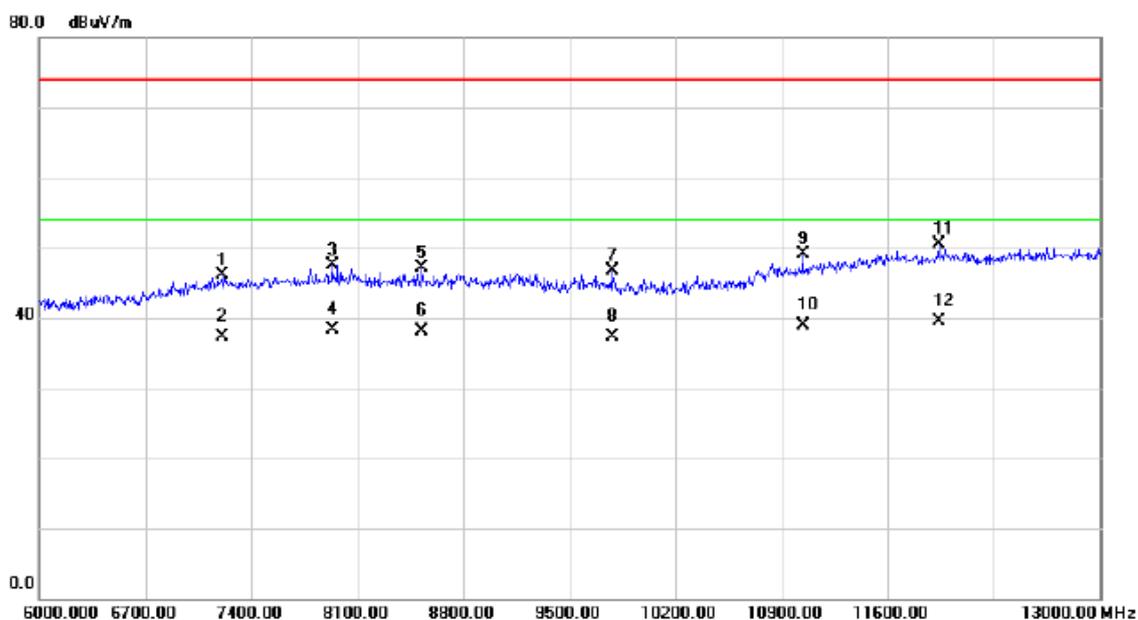

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7207.500	32.82	13.34	46.16	74.00	-27.84	peak	
2	7207.500	23.95	13.34	37.29	54.00	-16.71	AVG	
3	7935.500	33.28	14.23	47.51	74.00	-26.49	peak	
4	7935.500	24.05	14.23	38.28	54.00	-15.72	AVG	
5	8527.000	32.84	14.17	47.01	74.00	-26.99	peak	
6	8527.000	23.99	14.17	38.16	54.00	-15.84	AVG	
7	9783.500	32.74	13.98	46.72	74.00	-27.28	peak	
8	9783.500	23.34	13.98	37.32	54.00	-16.68	AVG	
9	11040.00	31.85	17.24	49.09	74.00	-24.91	peak	
10	11040.00	21.71	17.24	38.95	54.00	-15.05	AVG	
11	11939.50	30.22	20.22	50.44	74.00	-23.56	peak	
12 *	11939.50	19.23	20.22	39.45	54.00	-14.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Note:	Adapter: Phihong +USB Cable: Connrex


## Vertical

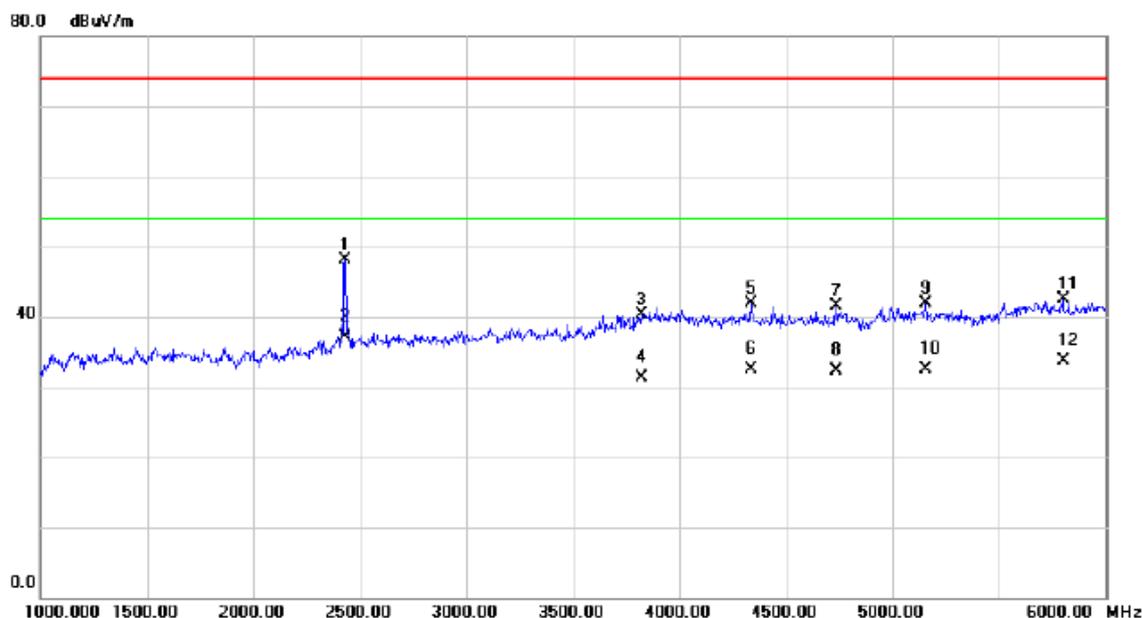

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2430.000	48.88	-0.81	48.07	74.00	-25.93	peak	
2	*	2430.000	37.93	-0.81	37.12	54.00	-16.88	AVG	
3		3820.000	35.74	4.64	40.38	74.00	-33.62	peak	
4		3820.000	26.61	4.64	31.25	54.00	-22.75	AVG	
5		4335.000	35.80	6.02	41.82	74.00	-32.18	peak	
6		4335.000	26.53	6.02	32.55	54.00	-21.45	AVG	
7		4737.500	34.65	6.95	41.60	74.00	-32.40	peak	
8		4737.500	25.39	6.95	32.34	54.00	-21.66	AVG	
9		5155.000	33.68	8.19	41.87	74.00	-32.13	peak	
10		5155.000	24.37	8.19	32.56	54.00	-21.44	AVG	
11		5802.500	32.74	9.77	42.51	74.00	-31.49	peak	
12		5802.500	24.01	9.77	33.78	54.00	-20.22	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Note:	Adapter: Phihong +USB Cable: Connrex


## Horizontal

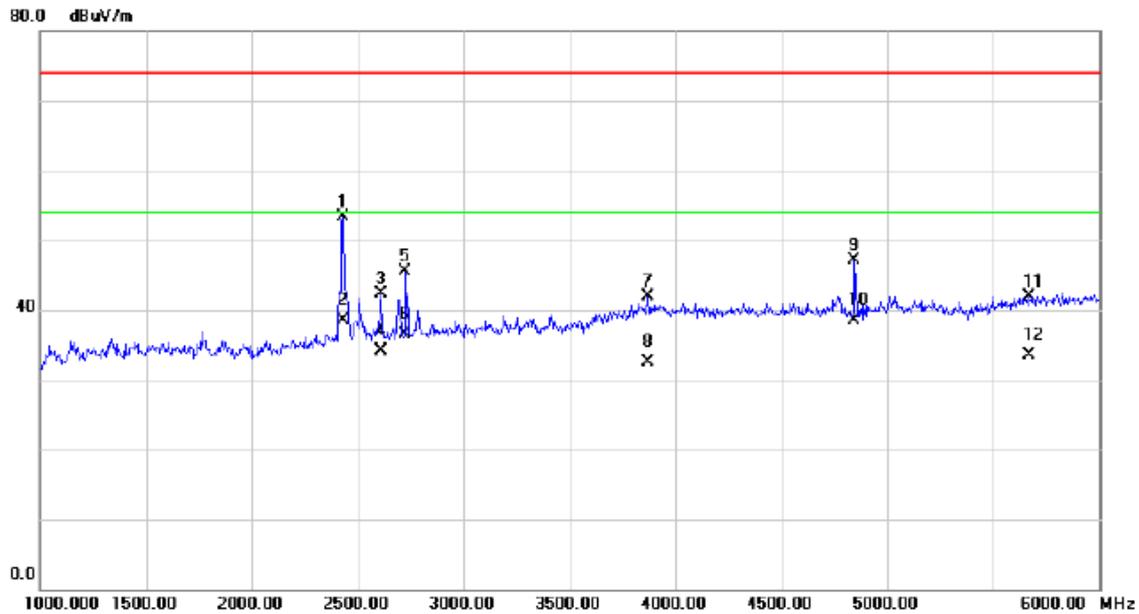

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2430.000	54.15	-0.81	53.34	74.00	-20.66	peak	
2	*	2430.000	39.26	-0.81	38.45	54.00	-15.55	AVG	
3		2610.000	42.20	0.02	42.22	74.00	-31.78	peak	
4		2610.000	34.13	0.02	34.15	54.00	-19.85	AVG	
5		2725.000	45.00	0.45	45.45	74.00	-28.55	peak	
6		2725.000	36.00	0.45	36.45	54.00	-17.55	AVG	
7		3872.500	36.88	4.94	41.82	74.00	-32.18	peak	
8		3872.500	27.62	4.94	32.56	54.00	-21.44	AVG	
9		4845.000	39.80	7.30	47.10	74.00	-26.90	peak	
10		4845.000	31.15	7.30	38.45	54.00	-15.55	AVG	
11		5670.000	32.43	9.46	41.89	74.00	-32.11	peak	
12		5670.000	23.99	9.46	33.45	54.00	-20.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Note:	Adapter: Phihong +USB Cable: Connrex


## Vertical

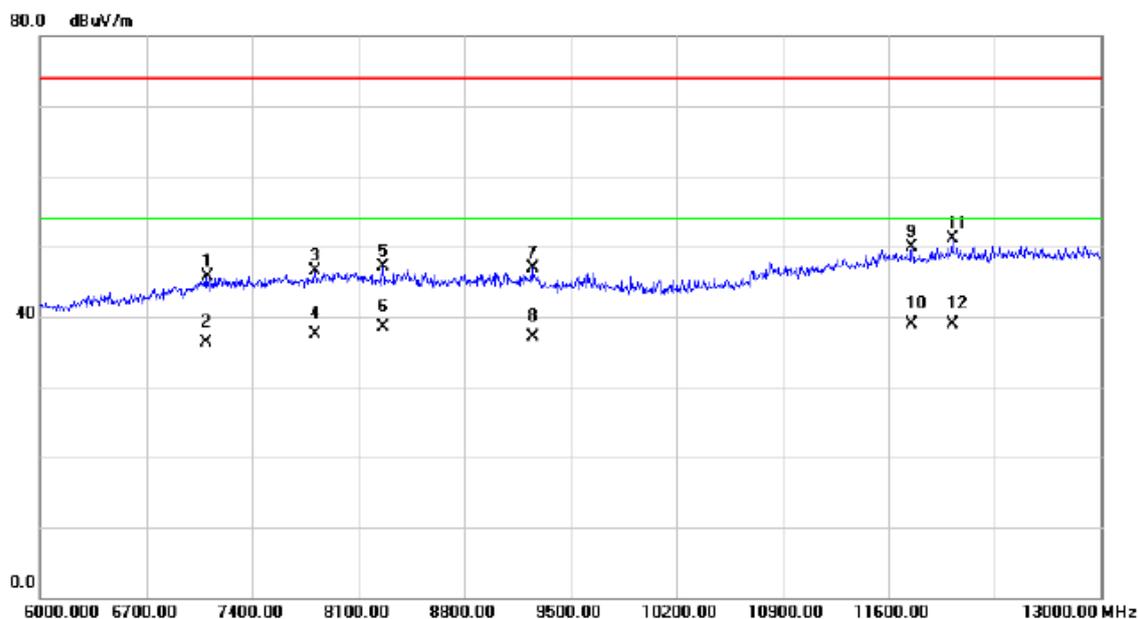

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7102.500	32.52	13.21	45.73	74.00	-28.27	peak	
2		7102.500	23.02	13.21	36.23	54.00	-17.77	AVG	
3		7816.500	32.41	14.10	46.51	74.00	-27.49	peak	
4		7816.500	23.38	14.10	37.48	54.00	-16.52	AVG	
5		8261.000	32.90	14.22	47.12	74.00	-26.88	peak	
6		8261.000	24.34	14.22	38.56	54.00	-15.44	AVG	
7		9248.000	32.46	14.48	46.94	74.00	-27.06	peak	
8		9248.000	22.64	14.48	37.12	54.00	-16.88	AVG	
9		11754.00	30.20	19.66	49.86	74.00	-24.14	peak	
10	*	11754.00	19.33	19.66	38.99	54.00	-15.01	AVG	
11		12020.00	30.77	20.40	51.17	74.00	-22.83	peak	
12		12020.00	18.51	20.40	38.91	54.00	-15.09	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Playing+Speaker
Note:	Adapter: Phihong +USB Cable: Connrex


## Horizontal

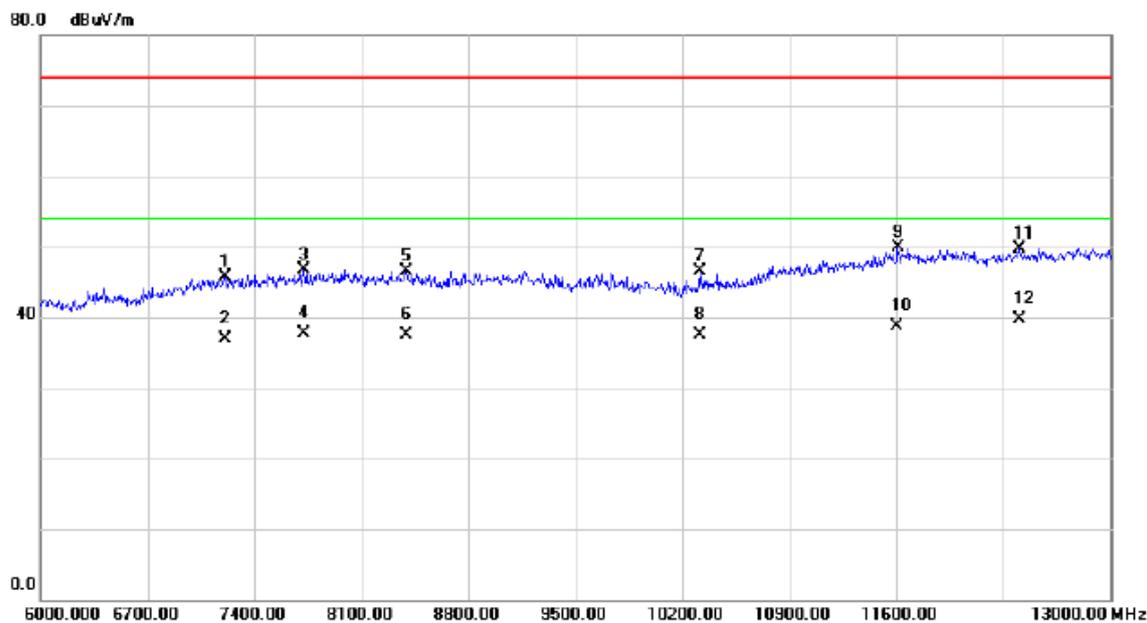

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7207.500	32.38	13.34	45.72	74.00	-28.28	peak	
2		7207.500	23.54	13.34	36.88	54.00	-17.12	AVG	
3		7725.500	32.73	13.99	46.72	74.00	-27.28	peak	
4		7725.500	23.79	13.99	37.78	54.00	-16.22	AVG	
5		8394.000	32.35	14.19	46.54	74.00	-27.46	peak	
6		8394.000	23.33	14.19	37.52	54.00	-16.48	AVG	
7		10312.00	32.22	14.27	46.49	74.00	-27.51	peak	
8		10312.00	23.19	14.27	37.46	54.00	-16.54	AVG	
9		11610.50	30.74	19.23	49.97	74.00	-24.03	peak	
10		11610.50	19.45	19.23	38.68	54.00	-15.32	AVG	
11		12408.50	29.21	20.48	49.69	74.00	-24.31	peak	
12	*	12408.50	19.14	20.48	39.62	54.00	-14.38	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Connrex


## Vertical

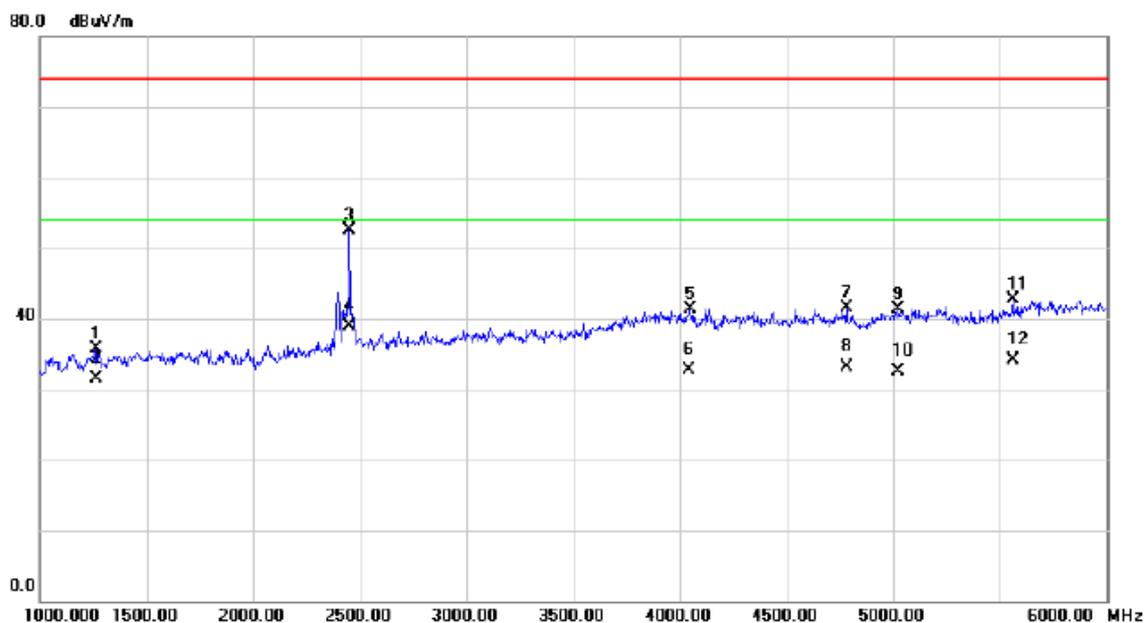

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1260.000	40.49	-4.82	35.67	74.00	-38.33	peak	
2		1260.000	36.26	-4.82	31.44	54.00	-22.56	AVG	
3		2450.000	53.29	-0.69	52.60	74.00	-21.40	peak	
4	*	2450.000	39.68	-0.69	38.99	54.00	-15.01	AVG	
5		4047.500	35.63	5.72	41.35	74.00	-32.65	peak	
6		4047.500	26.94	5.72	32.66	54.00	-21.34	AVG	
7		4782.500	34.42	7.10	41.52	74.00	-32.48	peak	
8		4782.500	26.04	7.10	33.14	54.00	-20.86	AVG	
9		5025.000	33.43	7.86	41.29	74.00	-32.71	peak	
10		5025.000	24.69	7.86	32.55	54.00	-21.45	AVG	
11		5560.000	33.56	9.21	42.77	74.00	-31.23	peak	
12		5560.000	24.91	9.21	34.12	54.00	-19.88	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Connrex


## Horizontal

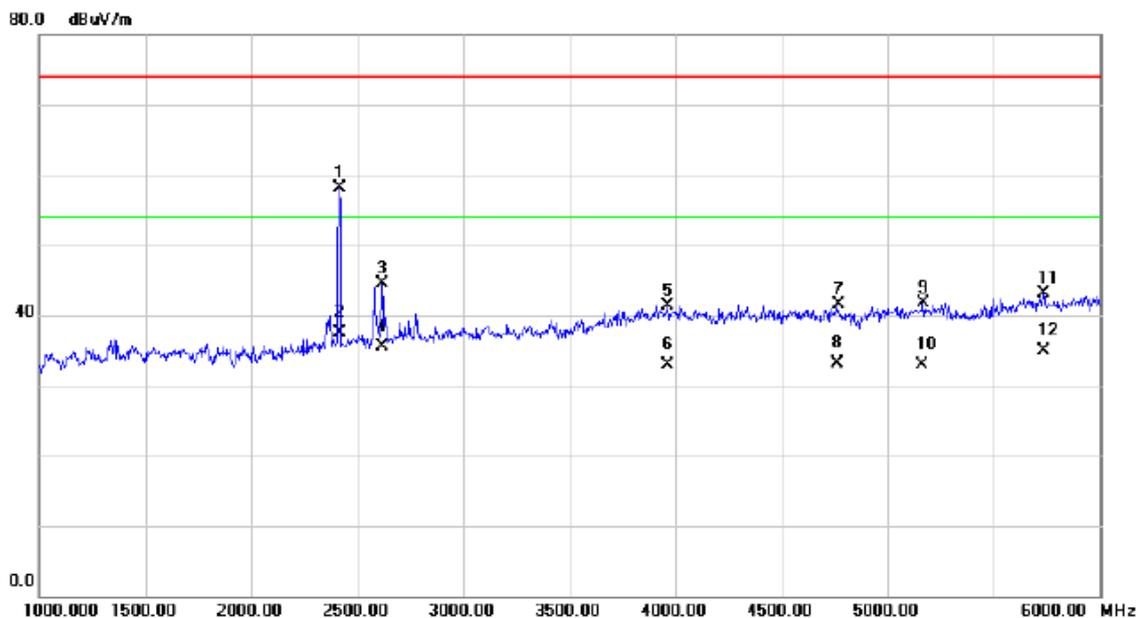

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	2417.500	58.95	-0.88	58.07	74.00	-15.93	peak	
2		2417.500	38.38	-0.88	37.50	54.00	-16.50	AVG	
3		2615.000	44.45	0.03	44.48	74.00	-29.52	peak	
4		2615.000	35.41	0.03	35.44	54.00	-18.56	AVG	
5		3965.000	35.90	5.47	41.37	74.00	-32.63	peak	
6		3965.000	27.37	5.47	32.84	54.00	-21.16	AVG	
7		4767.500	34.39	7.05	41.44	74.00	-32.56	peak	
8		4767.500	25.98	7.05	33.03	54.00	-20.97	AVG	
9		5167.500	33.44	8.24	41.68	74.00	-32.32	peak	
10		5167.500	24.66	8.24	32.90	54.00	-21.10	AVG	
11		5737.500	33.39	9.62	43.01	74.00	-30.99	peak	
12		5737.500	25.25	9.62	34.87	54.00	-19.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Connrex


## Vertical

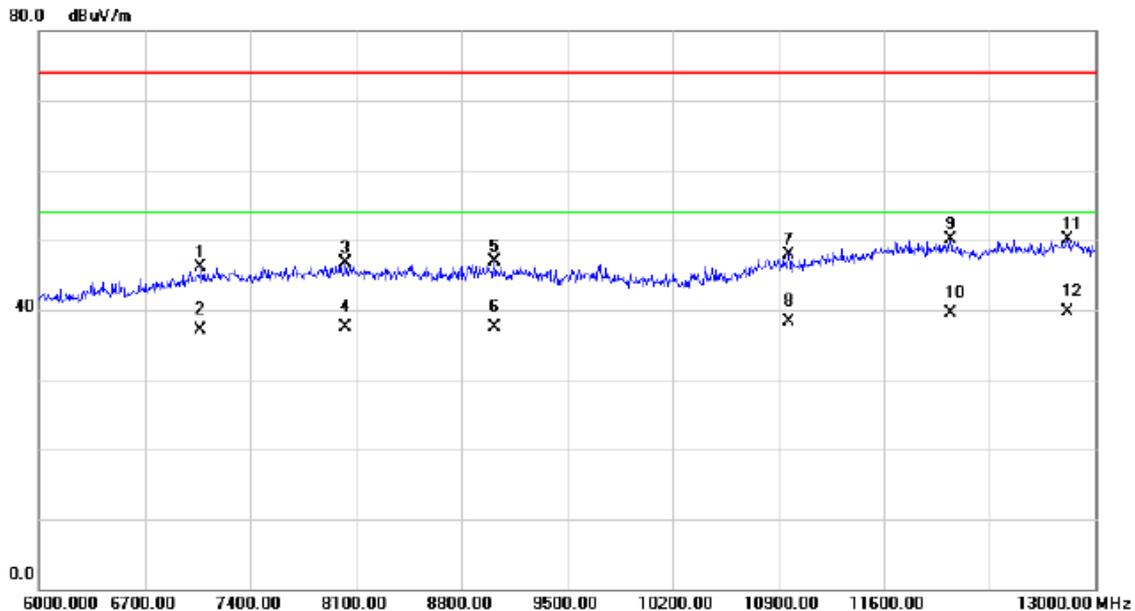

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7071.000	32.85	13.16	46.01	74.00	-27.99	peak	
2	7071.000	23.96	13.16	37.12	54.00	-16.88	AVG	
3	8033.500	32.44	14.29	46.73	74.00	-27.27	peak	
4	8033.500	23.23	14.29	37.52	54.00	-16.48	AVG	
5	9020.500	32.27	14.59	46.86	74.00	-27.14	peak	
6	9020.500	22.88	14.59	37.47	54.00	-16.53	AVG	
7	10973.500	30.94	16.97	47.91	74.00	-26.09	peak	
8	10973.500	21.27	16.97	38.24	54.00	-15.76	AVG	
9	12044.500	29.80	20.40	50.20	74.00	-23.80	peak	
10	12044.500	19.05	20.40	39.45	54.00	-14.55	AVG	
11	12821.500	29.43	20.77	50.20	74.00	-23.80	peak	
12 *	12821.500	19.00	20.77	39.77	54.00	-14.23	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: Phihong +USB Cable: Connrex


## Horizontal

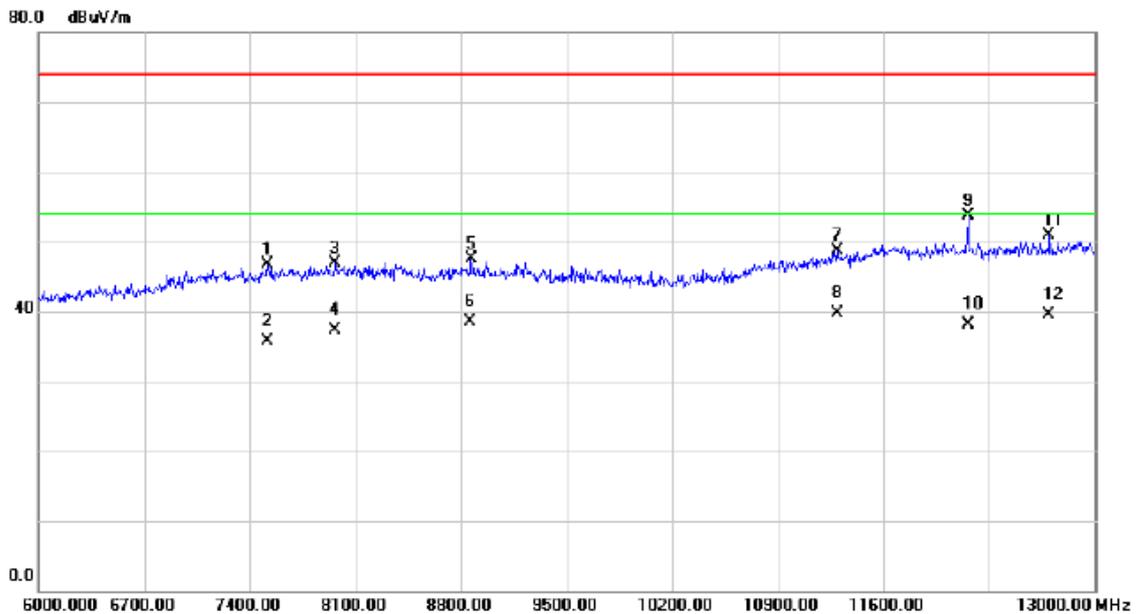

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7515.500	32.99	13.76	46.75	74.00	-27.25	peak	
2	7515.500	21.93	13.76	35.69	54.00	-18.31	AVG	
3	7967.000	32.60	14.27	46.87	74.00	-27.13	peak	
4	7967.000	22.97	14.27	37.24	54.00	-16.76	AVG	
5	8866.500	32.96	14.48	47.44	74.00	-26.56	peak	
6	8866.500	24.04	14.48	38.52	54.00	-15.48	AVG	
7	11292.00	30.57	18.15	48.72	74.00	-25.28	peak	
8 *	11292.00	21.55	18.15	39.70	54.00	-14.30	AVG	
9	12160.00	33.26	20.43	53.69	74.00	-20.31	peak	
10	12160.00	17.69	20.43	38.12	54.00	-15.88	AVG	
11	12699.00	30.22	20.66	50.88	74.00	-23.12	peak	
12	12699.00	18.79	20.66	39.45	54.00	-14.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Connrex


## Vertical

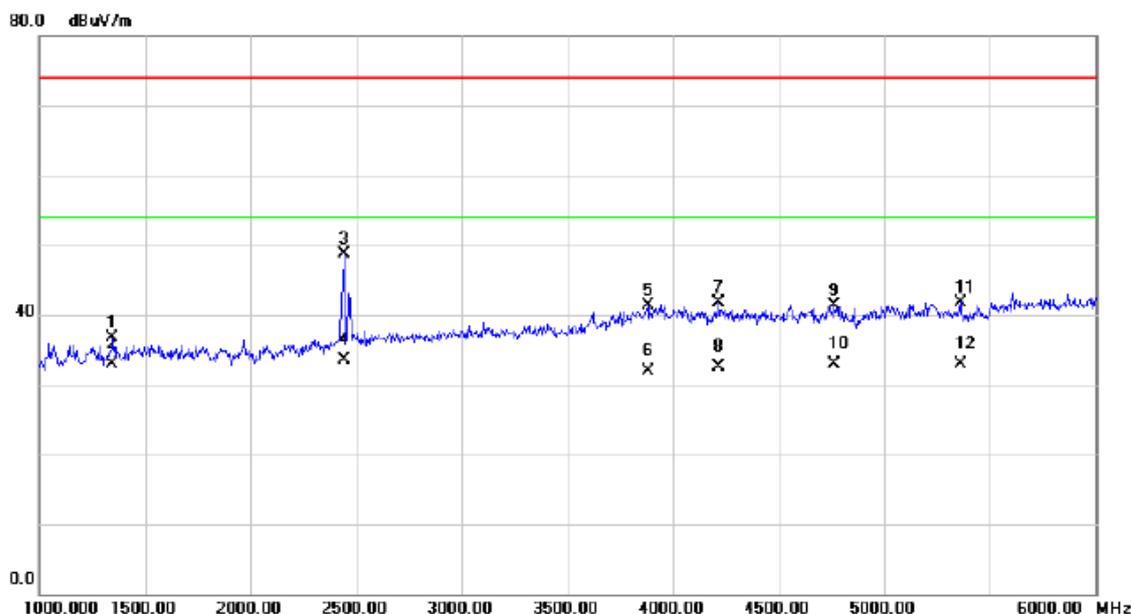

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1345.000	41.21	-4.54	36.67	74.00	-37.33	peak	
2		1345.000	37.50	-4.54	32.96	54.00	-21.04	AVG	
3		2445.000	49.43	-0.72	48.71	74.00	-25.29	peak	
4	*	2445.000	34.26	-0.72	33.54	54.00	-20.46	AVG	
5		3882.500	36.32	4.99	41.31	74.00	-32.69	peak	
6		3882.500	26.89	4.99	31.88	54.00	-22.12	AVG	
7		4217.500	35.79	5.89	41.68	74.00	-32.32	peak	
8		4217.500	26.67	5.89	32.56	54.00	-21.44	AVG	
9		4765.000	34.29	7.04	41.33	74.00	-32.67	peak	
10		4765.000	25.84	7.04	32.88	54.00	-21.12	AVG	
11		5362.500	33.08	8.72	41.80	74.00	-32.20	peak	
12		5362.500	24.27	8.72	32.99	54.00	-21.01	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Connrex


## Horizontal

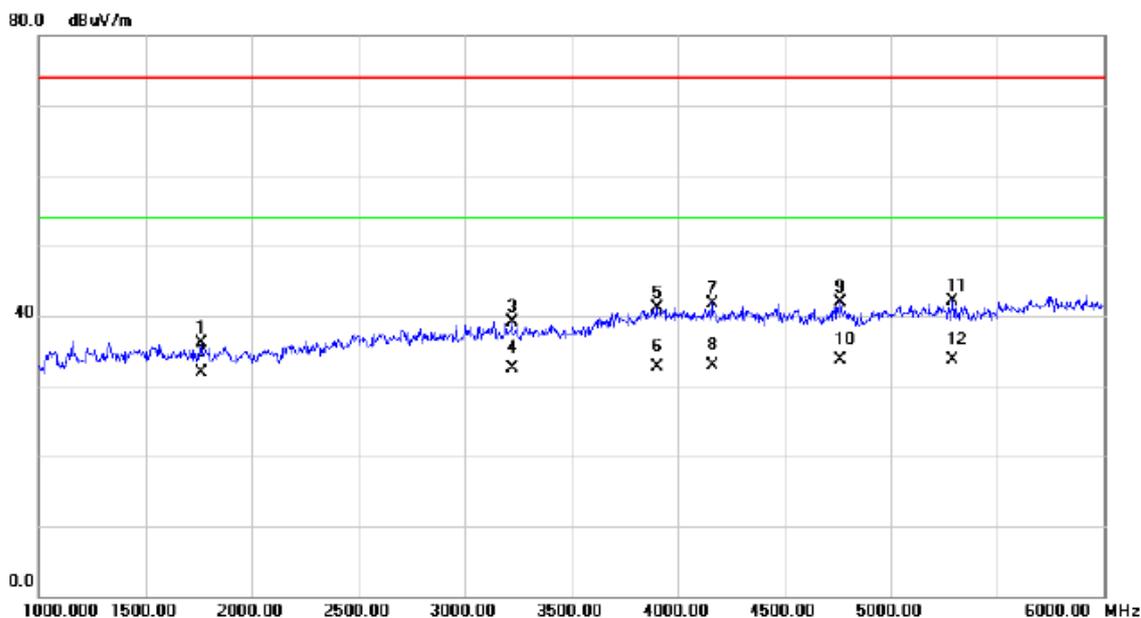

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1762.500	39.81	-3.67	36.14	74.00	-37.86	peak	
2		1762.500	35.55	-3.67	31.88	54.00	-22.12	AVG	
3		3220.000	37.04	2.06	39.10	74.00	-34.90	peak	
4		3220.000	30.38	2.06	32.44	54.00	-21.56	AVG	
5		3902.500	35.90	5.12	41.02	74.00	-32.98	peak	
6		3902.500	27.54	5.12	32.66	54.00	-21.34	AVG	
7		4162.500	35.97	5.83	41.80	74.00	-32.20	peak	
8		4162.500	27.16	5.83	32.99	54.00	-21.01	AVG	
9		4765.000	34.96	7.04	42.00	74.00	-32.00	peak	
10	*	4765.000	26.73	7.04	33.77	54.00	-20.23	AVG	
11		5292.500	33.50	8.55	42.05	74.00	-31.95	peak	
12		5292.500	25.15	8.55	33.70	54.00	-20.30	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Connrex


## Vertical

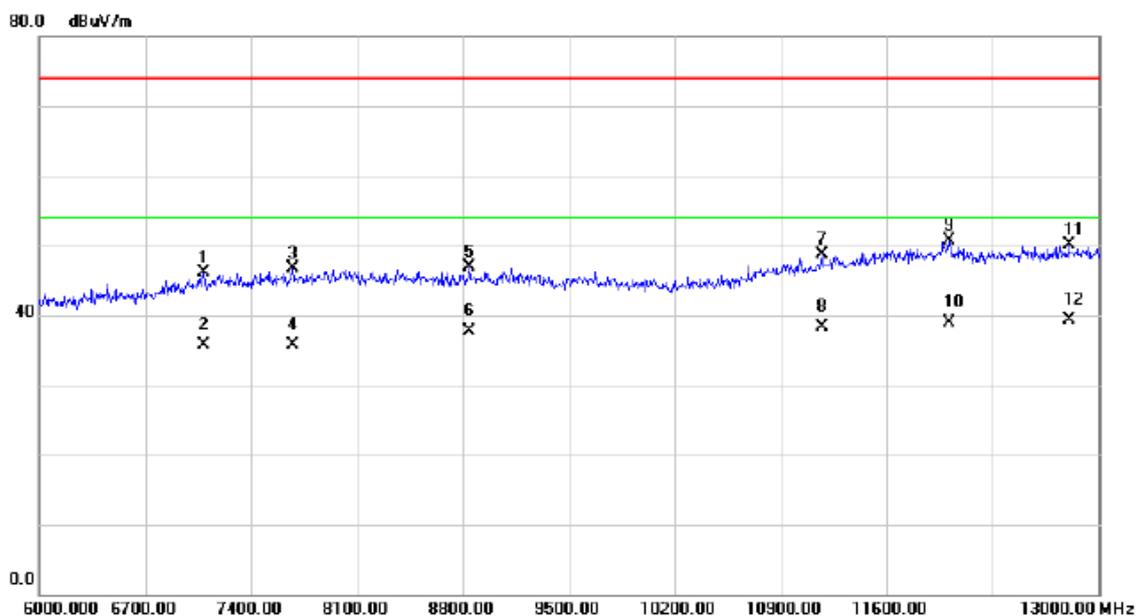

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7088.500	32.92	13.18	46.10	74.00	-27.90	peak	
2		7088.500	22.45	13.18	35.63	54.00	-18.37	AVG	
3		7673.000	32.75	13.94	46.69	74.00	-27.31	peak	
4		7673.000	21.77	13.94	35.71	54.00	-18.29	AVG	
5		8842.000	32.52	14.47	46.99	74.00	-27.01	peak	
6		8842.000	23.16	14.47	37.63	54.00	-16.37	AVG	
7		11176.500	31.04	17.74	48.78	74.00	-25.22	peak	
8		11176.500	20.58	17.74	38.32	54.00	-15.68	AVG	
9		12016.500	30.34	20.40	50.74	74.00	-23.26	peak	
10		12016.500	18.56	20.40	38.96	54.00	-15.04	AVG	
11		12807.500	29.33	20.75	50.08	74.00	-23.92	peak	
12	*	12807.500	18.50	20.75	39.25	54.00	-14.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: HK +USB Cable: Connrex


## Horizontal

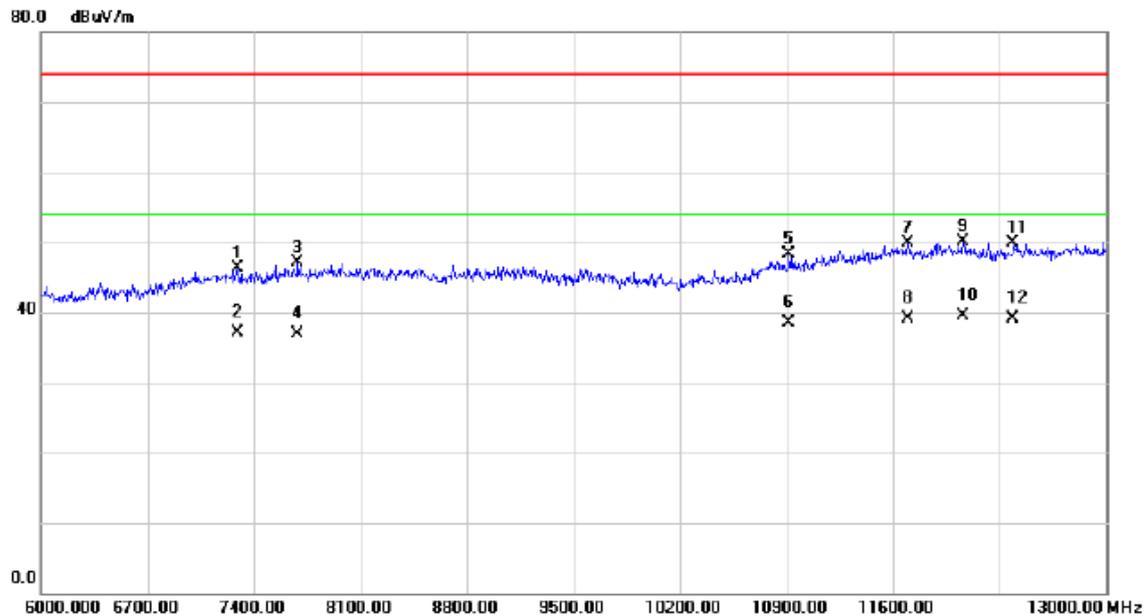

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7291.500	32.90	13.45	46.35	74.00	-27.65	peak	
2		7291.500	23.67	13.45	37.12	54.00	-16.88	AVG	
3		7687.000	33.07	13.94	47.01	74.00	-26.99	peak	
4		7687.000	22.93	13.94	36.87	54.00	-17.13	AVG	
5		10917.50	31.64	16.69	48.33	74.00	-25.67	peak	
6		10917.50	21.81	16.69	38.50	54.00	-15.50	AVG	
7		11698.00	30.35	19.50	49.85	74.00	-24.15	peak	
8		11698.00	19.51	19.50	39.01	54.00	-14.99	AVG	
9		12062.00	29.74	20.41	50.15	74.00	-23.85	peak	
10	*	12062.00	19.04	20.41	39.45	54.00	-14.55	AVG	
11		12391.00	29.47	20.48	49.95	74.00	-24.05	peak	
12		12391.00	18.55	20.48	39.03	54.00	-14.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Connrex


## Vertical

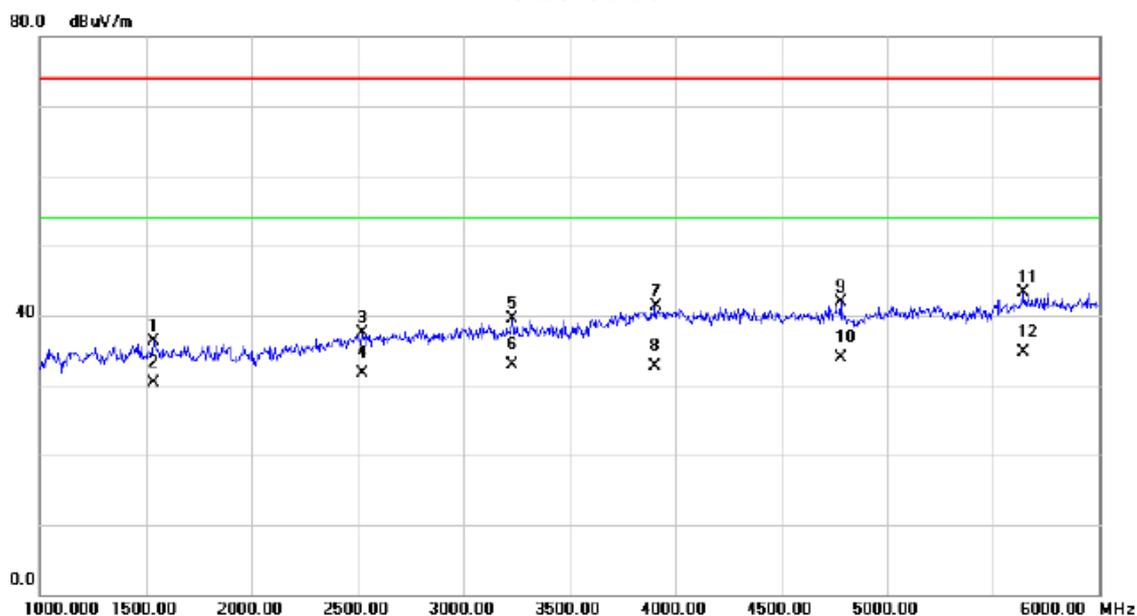

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1537.500	40.19	-3.98	36.21	74.00	-37.79	peak	
2		1537.500	34.20	-3.98	30.22	54.00	-23.78	AVG	
3		2525.000	37.76	-0.29	37.47	74.00	-36.53	peak	
4		2525.000	31.92	-0.29	31.63	54.00	-22.37	AVG	
5		3230.000	37.40	2.08	39.48	74.00	-34.52	peak	
6		3230.000	30.88	2.08	32.96	54.00	-21.04	AVG	
7		3907.500	36.09	5.14	41.23	74.00	-32.77	peak	
8		3907.500	27.49	5.14	32.63	54.00	-21.37	AVG	
9		4782.500	34.73	7.10	41.83	74.00	-32.17	peak	
10		4782.500	26.89	7.10	33.99	54.00	-20.01	AVG	
11		5642.500	33.81	9.41	43.22	74.00	-30.78	peak	
12	*	5642.500	25.22	9.41	34.63	54.00	-19.37	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Connrex


## Horizontal

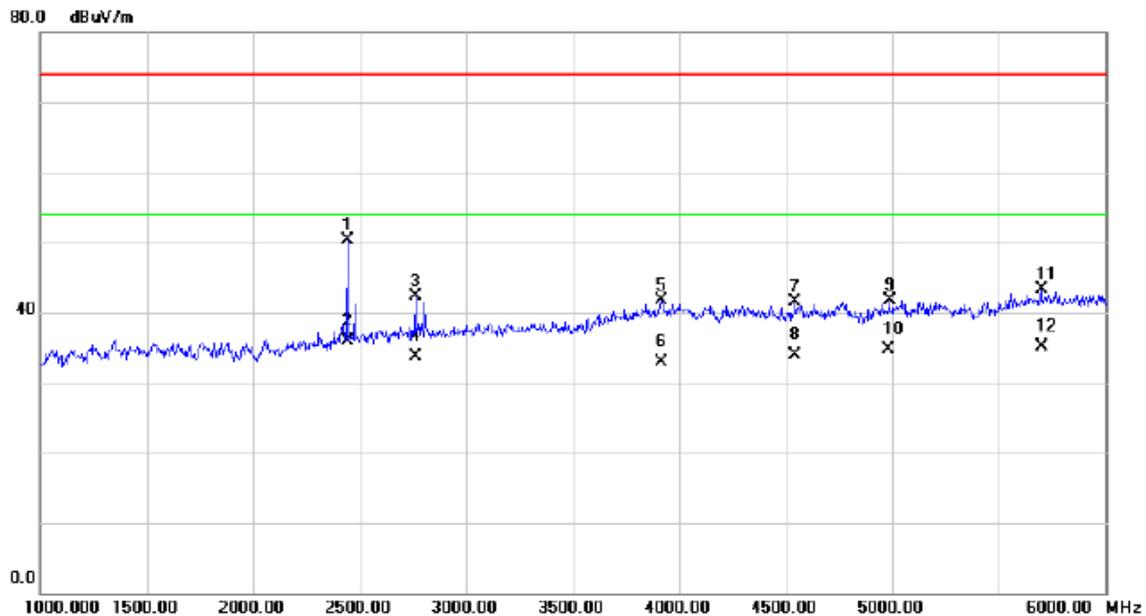

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2440.000	51.15	-0.75	50.40	74.00	-23.60	peak	
2	*	2440.000	36.71	-0.75	35.96	54.00	-18.04	AVG	
3		2760.000	41.64	0.58	42.22	74.00	-31.78	peak	
4		2760.000	33.05	0.58	33.63	54.00	-20.37	AVG	
5		3917.500	36.41	5.21	41.62	74.00	-32.38	peak	
6		3917.500	27.68	5.21	32.89	54.00	-21.11	AVG	
7		4545.000	35.18	6.33	41.51	74.00	-32.49	peak	
8		4545.000	27.54	6.33	33.87	54.00	-20.13	AVG	
9		4987.500	33.89	7.76	41.65	74.00	-32.35	peak	
10		4987.500	26.86	7.76	34.62	54.00	-19.38	AVG	
11		5700.000	33.82	9.53	43.35	74.00	-30.65	peak	
12		5700.000	25.50	9.53	35.03	54.00	-18.97	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Connrex


## Vertical

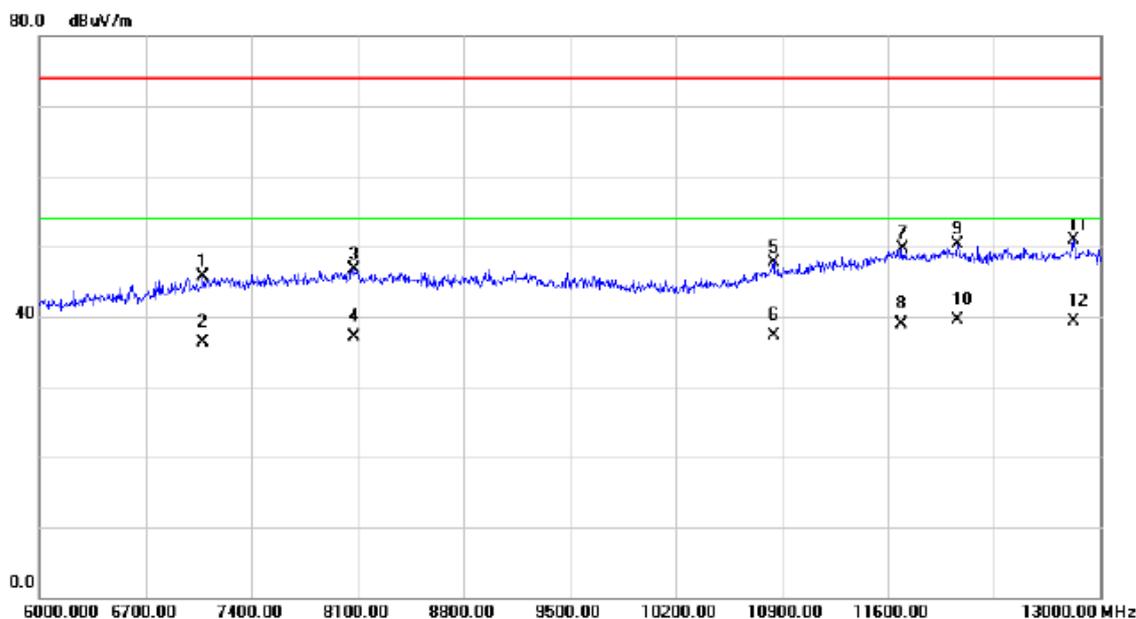

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7081.500	32.49	13.18	45.67	74.00	-28.33	peak	
2		7081.500	23.04	13.18	36.22	54.00	-17.78	AVG	
3		8079.000	32.47	14.28	46.75	74.00	-27.25	peak	
4		8079.000	22.86	14.28	37.14	54.00	-16.86	AVG	
5		10847.50	31.46	16.34	47.80	74.00	-26.20	peak	
6		10847.50	21.02	16.34	37.36	54.00	-16.64	AVG	
7		11694.50	30.24	19.48	49.72	74.00	-24.28	peak	
8		11694.50	19.47	19.48	38.95	54.00	-15.05	AVG	
9		12062.00	29.84	20.41	50.25	74.00	-23.75	peak	
10	*	12062.00	19.00	20.41	39.41	54.00	-14.59	AVG	
11		12825.00	30.06	20.76	50.82	74.00	-23.18	peak	
12		12825.00	18.52	20.76	39.28	54.00	-14.72	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	Adapter+BT+2.4G WIFI+GPS+Camera on
Note:	Adapter: BYD +USB Cable: Connrex


## Horizontal

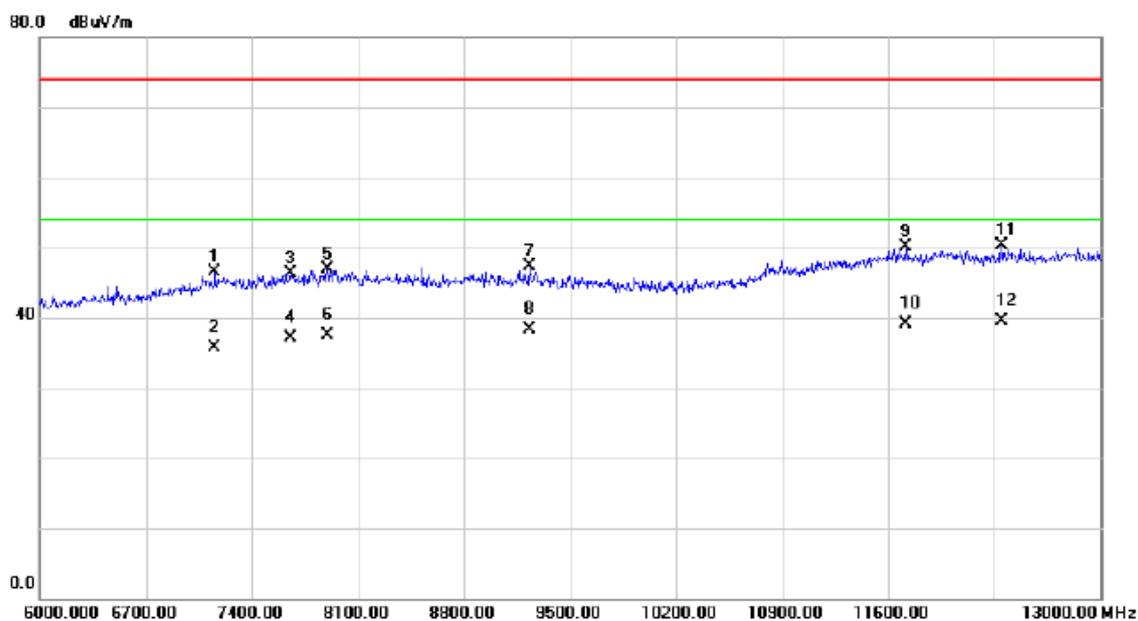

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7155.000	33.31	13.27	46.58	74.00	-27.42	peak	
2		7155.000	22.49	13.27	35.76	54.00	-18.24	AVG	
3		7655.500	32.44	13.91	46.35	74.00	-27.65	peak	
4		7655.500	23.21	13.91	37.12	54.00	-16.88	AVG	
5		7900.500	32.69	14.19	46.88	74.00	-27.12	peak	
6		7900.500	23.37	14.19	37.56	54.00	-16.44	AVG	
7		9234.000	32.79	14.48	47.27	74.00	-26.73	peak	
8		9234.000	23.75	14.48	38.23	54.00	-15.77	AVG	
9		11715.500	30.52	19.55	50.07	74.00	-23.93	peak	
10		11715.500	19.57	19.55	39.12	54.00	-14.88	AVG	
11		12352.500	29.85	20.48	50.33	74.00	-23.67	peak	
12	*	12352.500	18.99	20.48	39.47	54.00	-14.53	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Unirise


## Vertical

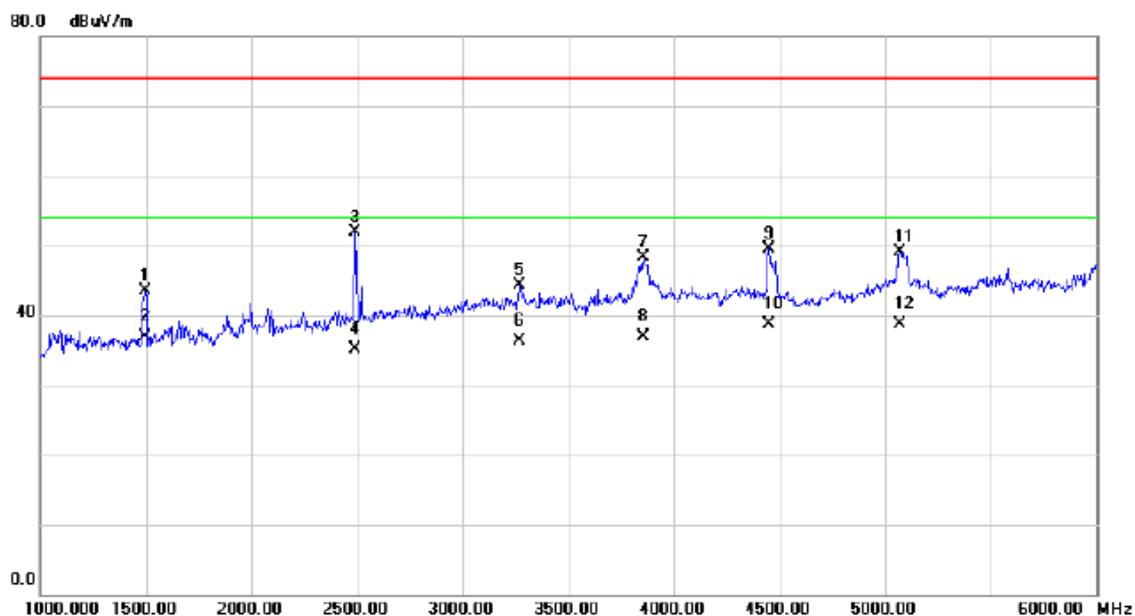

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1497.500	47.48	-4.04	43.44	74.00	-30.56	peak	
2		1497.500	40.89	-4.04	36.85	54.00	-17.15	AVG	
3		2490.000	52.31	-0.46	51.85	74.00	-22.15	peak	
4		2490.000	35.56	-0.46	35.10	54.00	-18.90	AVG	
5		3272.500	42.03	2.20	44.23	74.00	-29.77	peak	
6		3272.500	34.01	2.20	36.21	54.00	-17.79	AVG	
7		3855.000	43.41	4.85	48.26	74.00	-25.74	peak	
8		3855.000	32.14	4.85	36.99	54.00	-17.01	AVG	
9		4450.000	43.46	6.14	49.60	74.00	-24.40	peak	
10		4450.000	32.51	6.14	38.65	54.00	-15.35	AVG	
11		5070.000	41.11	7.98	49.09	74.00	-24.91	peak	
12	*	5070.000	30.81	7.98	38.79	54.00	-15.21	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable:


## Horizontal

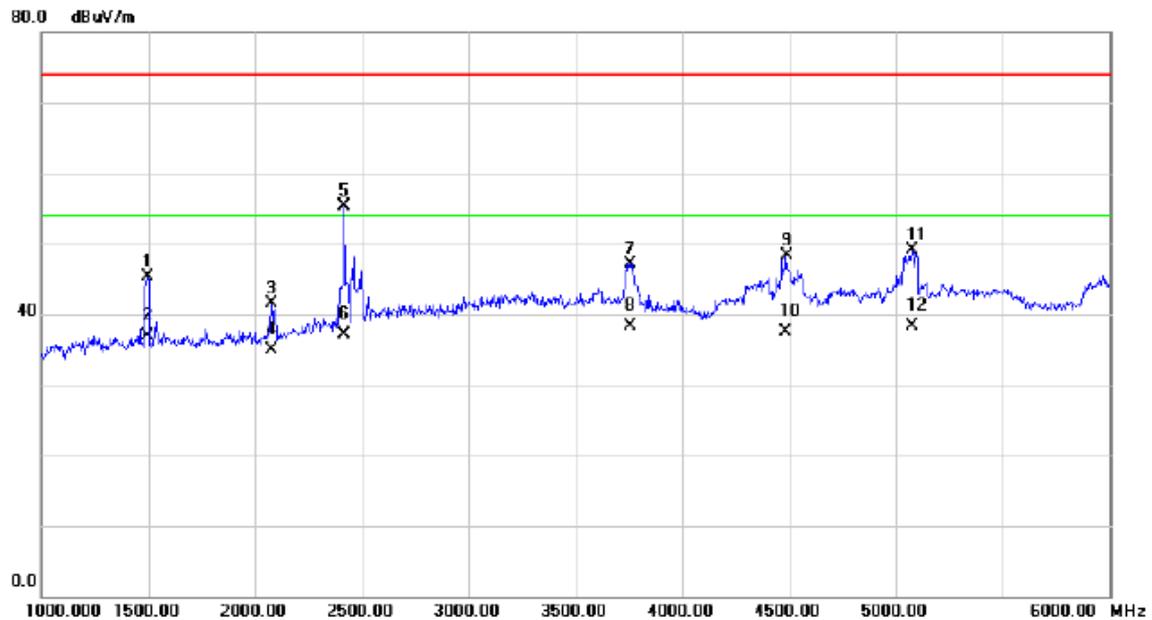

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1497.500	49.25	-4.04	45.21	74.00	-28.79	peak	
2		1497.500	40.93	-4.04	36.89	54.00	-17.11	AVG	
3		2075.000	44.42	-2.89	41.53	74.00	-32.47	peak	
4		2075.000	37.87	-2.89	34.98	54.00	-19.02	AVG	
5		2415.000	56.20	-0.89	55.31	74.00	-18.69	peak	
6		2415.000	38.01	-0.89	37.12	54.00	-16.88	AVG	
7		3757.500	42.85	4.29	47.14	74.00	-26.86	peak	
8		3757.500	33.92	4.29	38.21	54.00	-15.79	AVG	
9		4487.500	42.09	6.17	48.26	74.00	-25.74	peak	
10		4487.500	31.41	6.17	37.58	54.00	-16.42	AVG	
11		5077.500	41.17	8.00	49.17	74.00	-24.83	peak	
12	*	5077.500	30.25	8.00	38.25	54.00	-15.75	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Unirise


## Vertical

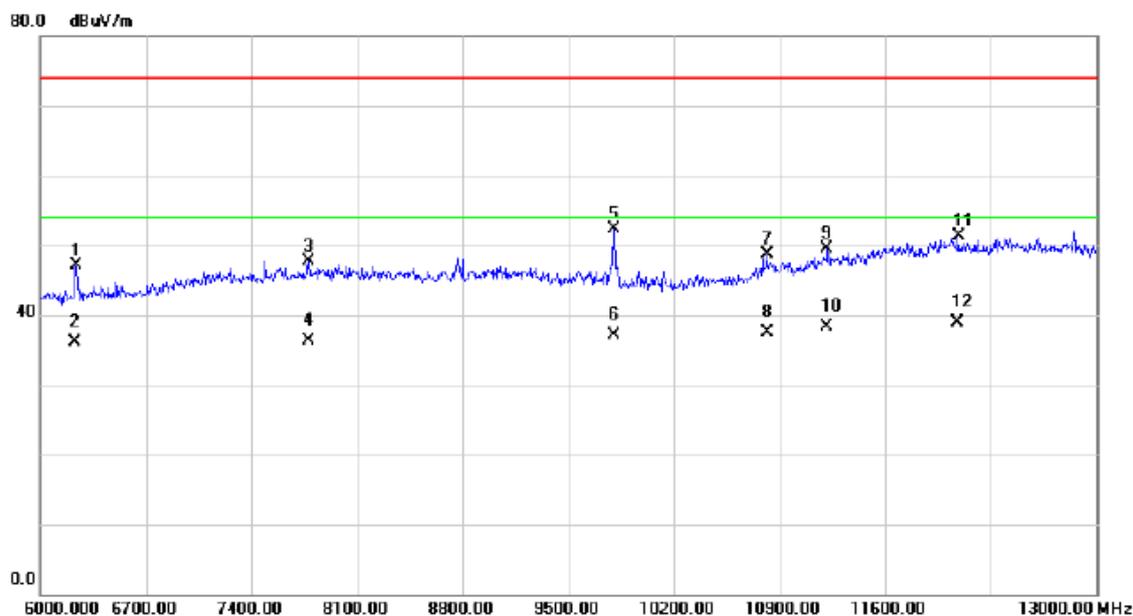

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6234.500	36.55	10.57	47.12	74.00	-26.88	peak	
2		6234.500	25.55	10.57	36.12	54.00	-17.88	AVG	
3		7781.500	33.70	14.05	47.75	74.00	-26.25	peak	
4		7781.500	22.29	14.05	36.34	54.00	-17.66	AVG	
5		9801.000	38.36	13.96	52.32	74.00	-21.68	peak	
6		9801.000	23.14	13.96	37.10	54.00	-16.90	AVG	
7		10819.50	32.49	16.19	48.68	74.00	-25.32	peak	
8		10819.50	21.31	16.19	37.50	54.00	-16.50	AVG	
9		11215.00	31.54	17.87	49.41	74.00	-24.59	peak	
10		11215.00	20.37	17.87	38.24	54.00	-15.76	AVG	
11		12086.50	30.96	20.42	51.38	74.00	-22.62	peak	
12	*	12086.50	18.54	20.42	38.96	54.00	-15.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable:


## Horizontal

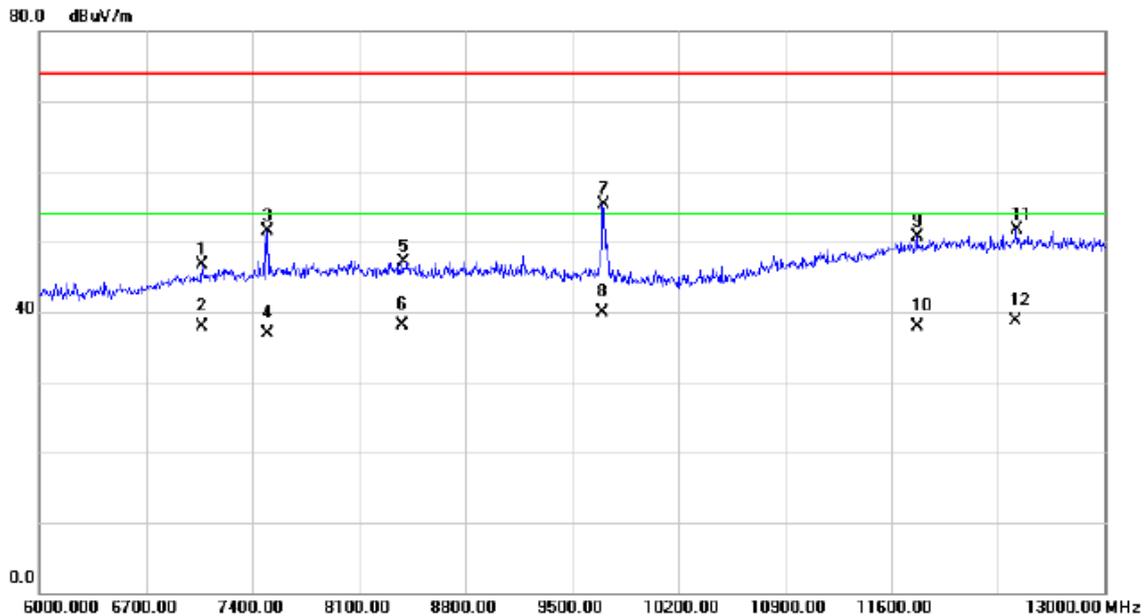

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7064.000	33.53	13.15	46.68	74.00	-27.32	peak	
2		7064.000	24.66	13.15	37.81	54.00	-16.19	AVG	
3		7498.000	37.81	13.73	51.54	74.00	-22.46	peak	
4		7498.000	23.16	13.73	36.89	54.00	-17.11	AVG	
5		8390.500	33.00	14.18	47.18	74.00	-26.82	peak	
6		8390.500	23.93	14.18	38.11	54.00	-15.89	AVG	
7		9706.500	41.26	14.08	55.34	74.00	-18.66	peak	
8	*	9706.500	25.81	14.08	39.89	54.00	-14.11	AVG	
9		11768.000	31.07	19.71	50.78	74.00	-23.22	peak	
10		11768.000	18.18	19.71	37.89	54.00	-16.11	AVG	
11		12422.500	31.19	20.49	51.68	74.00	-22.32	peak	
12		12422.500	18.25	20.49	38.74	54.00	-15.26	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Connrex


## Vertical

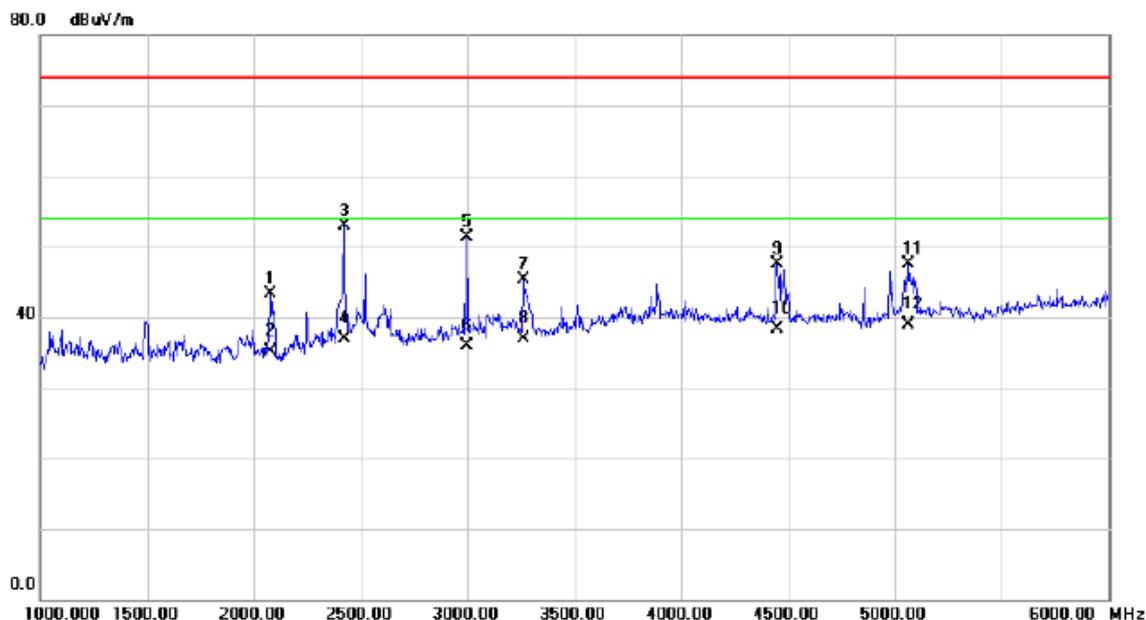

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2077.500	46.23	-2.88	43.35	74.00	-30.65	peak	
2		2077.500	37.99	-2.88	35.11	54.00	-18.89	AVG	
3		2422.500	53.69	-0.85	52.84	74.00	-21.16	peak	
4		2422.500	37.74	-0.85	36.89	54.00	-17.11	AVG	
5		2997.500	49.85	1.45	51.30	74.00	-22.70	peak	
6		2997.500	34.54	1.45	35.99	54.00	-18.01	AVG	
7		3262.500	43.10	2.18	45.28	74.00	-28.72	peak	
8		3262.500	34.70	2.18	36.88	54.00	-17.12	AVG	
9		4450.000	41.29	6.14	47.43	74.00	-26.57	peak	
10		4450.000	32.13	6.14	38.27	54.00	-15.73	AVG	
11		5065.000	39.54	7.97	47.51	74.00	-26.49	peak	
12	*	5065.000	30.99	7.97	38.96	54.00	-15.04	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Connrex


## Horizontal

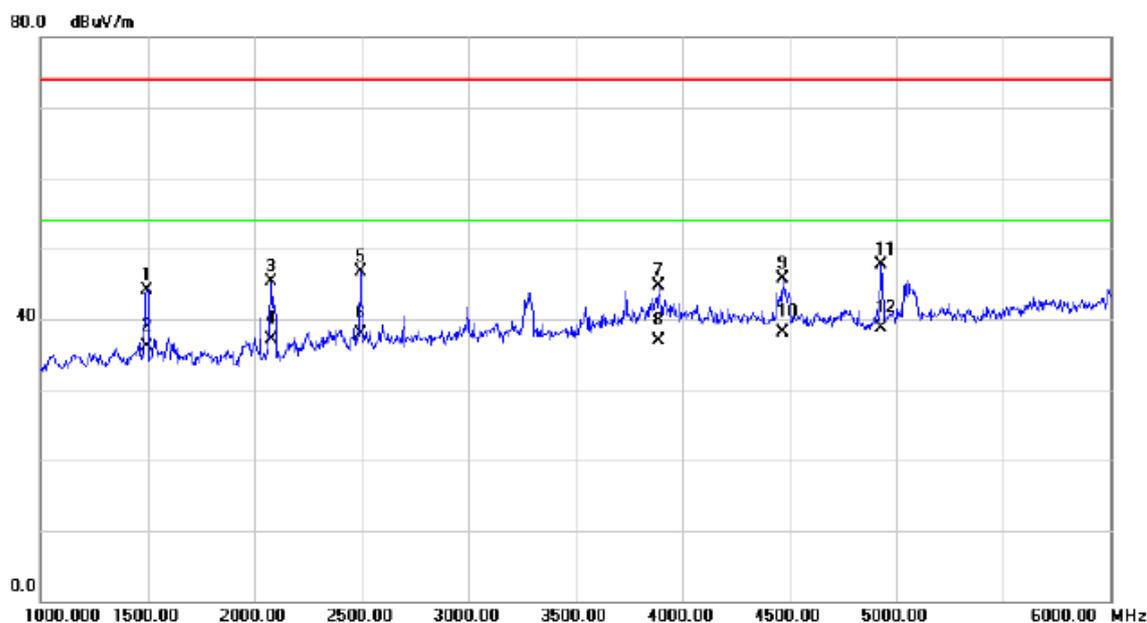

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1497.500	48.18	-4.04	44.14	74.00	-29.86	peak	
2		1497.500	40.14	-4.04	36.10	54.00	-17.90	AVG	
3		2077.500	48.18	-2.88	45.30	74.00	-28.70	peak	
4		2077.500	39.90	-2.88	37.02	54.00	-16.98	AVG	
5		2497.500	47.11	-0.41	46.70	74.00	-27.30	peak	
6		2497.500	38.27	-0.41	37.86	54.00	-16.14	AVG	
7		3890.000	39.63	5.04	44.67	74.00	-29.33	peak	
8		3890.000	31.81	5.04	36.85	54.00	-17.15	AVG	
9		4472.500	39.47	6.15	45.62	74.00	-28.38	peak	
10		4472.500	31.97	6.15	38.12	54.00	-15.88	AVG	
11		4932.500	40.04	7.58	47.62	74.00	-26.38	peak	
12	*	4932.500	31.11	7.58	38.69	54.00	-15.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Connrex


## Vertical

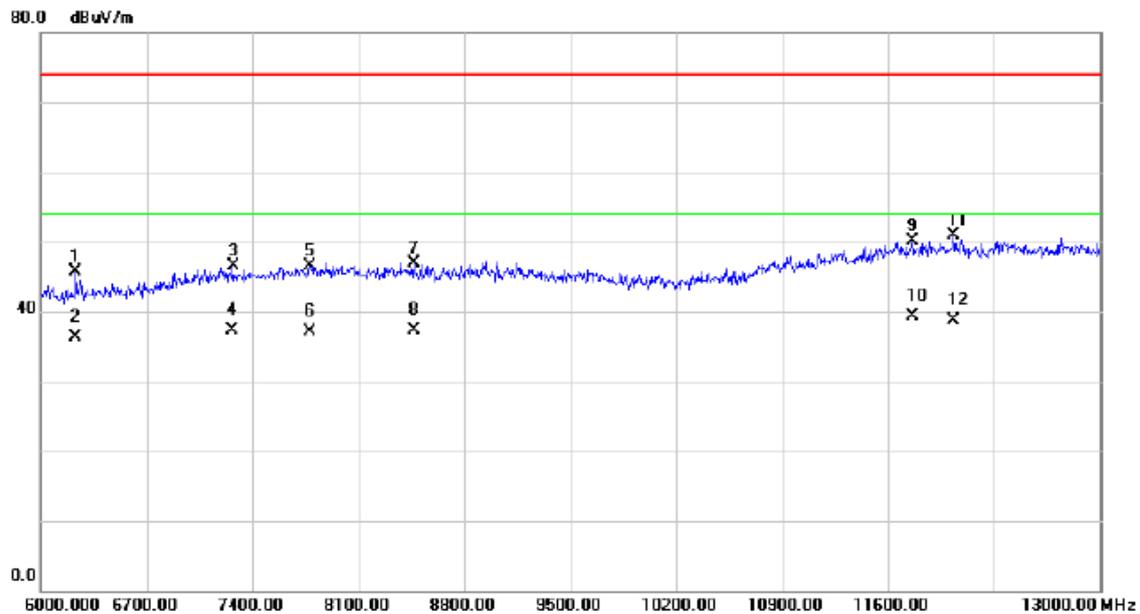

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		6231.000	35.13	10.57	45.70	74.00	-28.30	peak	
2		6231.000	25.80	10.57	36.37	54.00	-17.63	AVG	
3		7270.500	33.01	13.42	46.43	74.00	-27.57	peak	
4		7270.500	23.93	13.42	37.35	54.00	-16.65	AVG	
5		7781.500	32.51	14.05	46.56	74.00	-27.44	peak	
6		7781.500	23.13	14.05	37.18	54.00	-16.82	AVG	
7		8464.000	32.76	14.17	46.93	74.00	-27.07	peak	
8		8464.000	23.11	14.17	37.28	54.00	-16.72	AVG	
9		11764.50	30.33	19.69	50.02	74.00	-23.98	peak	
10	*	11764.50	19.67	19.69	39.36	54.00	-14.64	AVG	
11		12034.00	30.53	20.40	50.93	74.00	-23.07	peak	
12		12034.00	18.29	20.40	38.69	54.00	-15.31	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: Connrex


## Horizontal

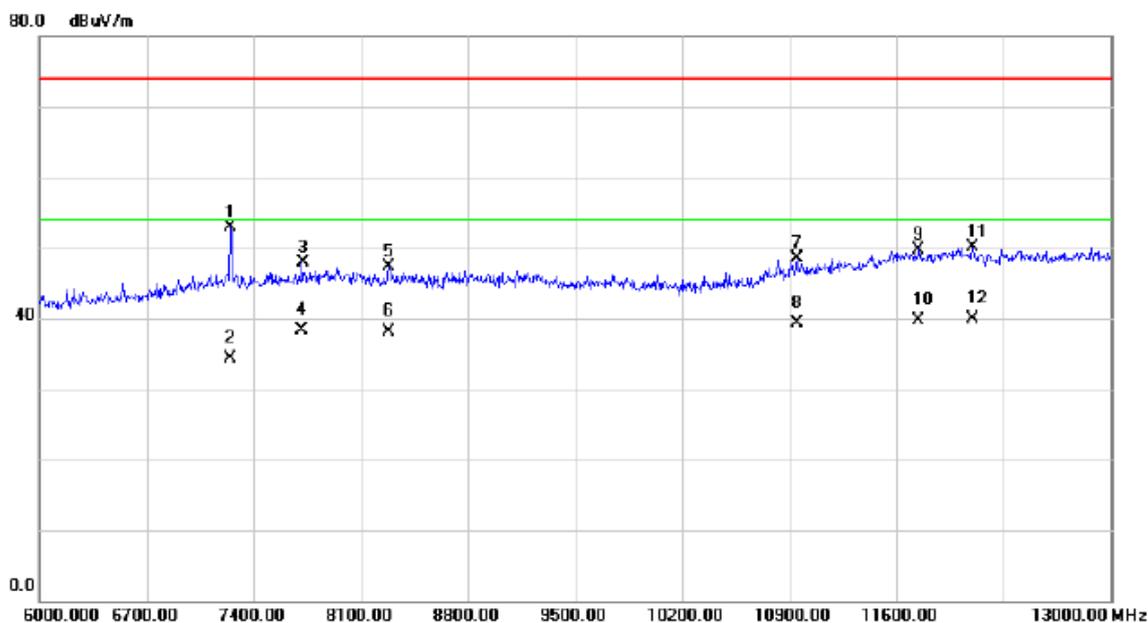

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		7249.500	39.42	13.40	52.82	74.00	-21.18	peak	
2		7249.500	20.86	13.40	34.26	54.00	-19.74	AVG	
3		7718.500	33.96	13.98	47.94	74.00	-26.06	peak	
4		7718.500	24.34	13.98	38.32	54.00	-15.68	AVG	
5		8282.000	33.17	14.21	47.38	74.00	-26.62	peak	
6		8282.000	23.89	14.21	38.10	54.00	-15.90	AVG	
7		10949.00	31.75	16.85	48.60	74.00	-25.40	peak	
8		10949.00	22.44	16.85	39.29	54.00	-14.71	AVG	
9		11747.00	30.15	19.65	49.80	74.00	-24.20	peak	
10		11747.00	20.03	19.65	39.68	54.00	-14.32	AVG	
11		12097.00	29.71	20.42	50.13	74.00	-23.87	peak	
12	*	12097.00	19.45	20.42	39.87	54.00	-14.13	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


## Vertical

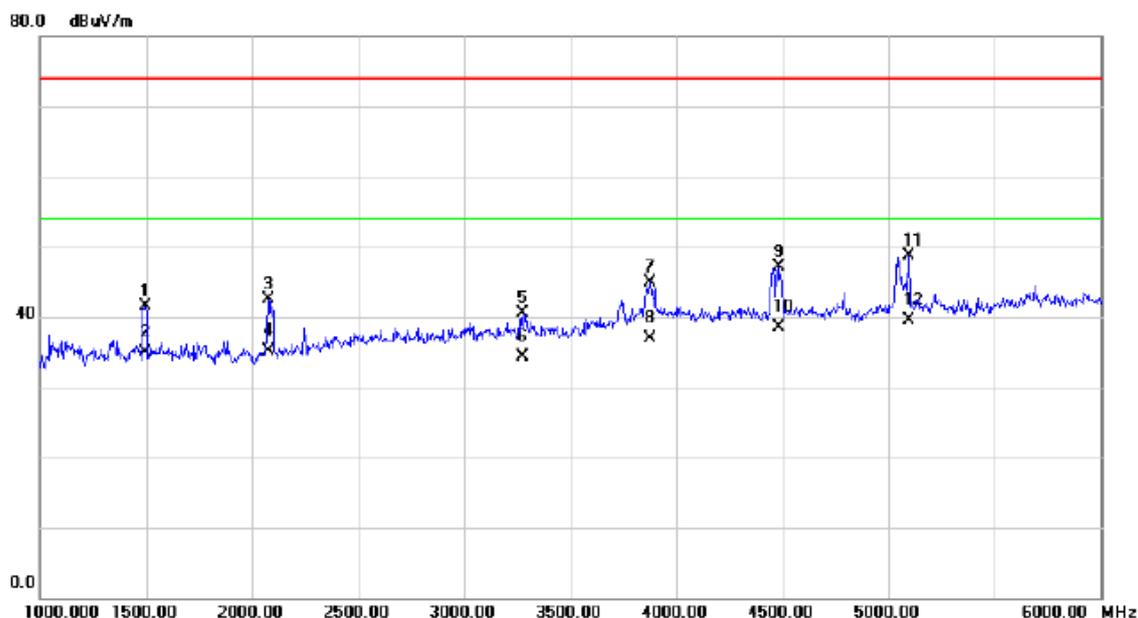

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1495.000	45.52	-4.06	41.46	74.00	-32.54	peak	
2		1495.000	39.03	-4.06	34.97	54.00	-19.03	AVG	
3		2075.000	45.42	-2.89	42.53	74.00	-31.47	peak	
4		2075.000	38.02	-2.89	35.13	54.00	-18.87	AVG	
5		3275.000	38.21	2.20	40.41	74.00	-33.59	peak	
6		3275.000	32.01	2.20	34.21	54.00	-19.79	AVG	
7		3875.000	40.00	4.95	44.95	74.00	-29.05	peak	
8		3875.000	31.93	4.95	36.88	54.00	-17.12	AVG	
9		4480.000	40.93	6.17	47.10	74.00	-26.90	peak	
10		4480.000	32.28	6.17	38.45	54.00	-15.55	AVG	
11		5097.500	40.73	8.05	48.78	74.00	-25.22	peak	
12	*	5097.500	31.40	8.05	39.45	54.00	-14.55	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


## Horizontal

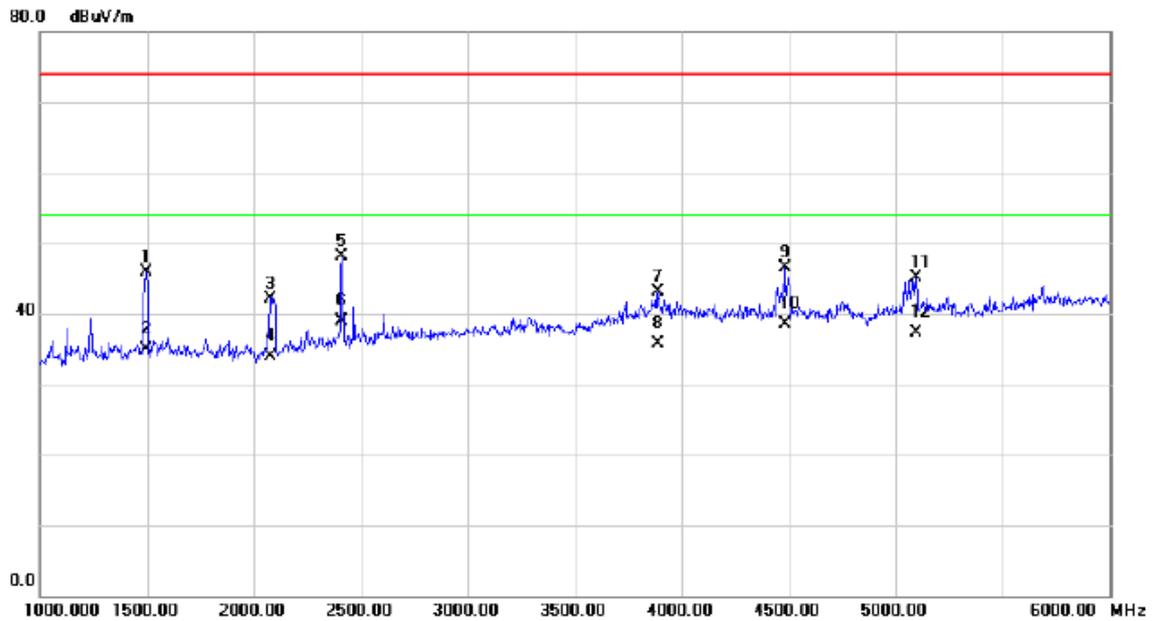

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		1497.500	49.88	-4.04	45.84	74.00	-28.16	peak	
2		1497.500	38.93	-4.04	34.89	54.00	-19.11	AVG	
3		2075.000	45.09	-2.89	42.20	74.00	-31.80	peak	
4		2075.000	36.74	-2.89	33.85	54.00	-20.15	AVG	
5		2410.000	49.07	-0.92	48.15	74.00	-25.85	peak	
6	*	2410.000	39.78	-0.92	38.86	54.00	-15.14	AVG	
7		3890.000	38.11	5.04	43.15	74.00	-30.85	peak	
8		3890.000	30.65	5.04	35.69	54.00	-18.31	AVG	
9		4480.000	40.37	6.17	46.54	74.00	-27.46	peak	
10		4480.000	32.29	6.17	38.46	54.00	-15.54	AVG	
11		5097.500	37.07	8.05	45.12	74.00	-28.88	peak	
12		5097.500	29.31	8.05	37.36	54.00	-16.64	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI


### Vertical

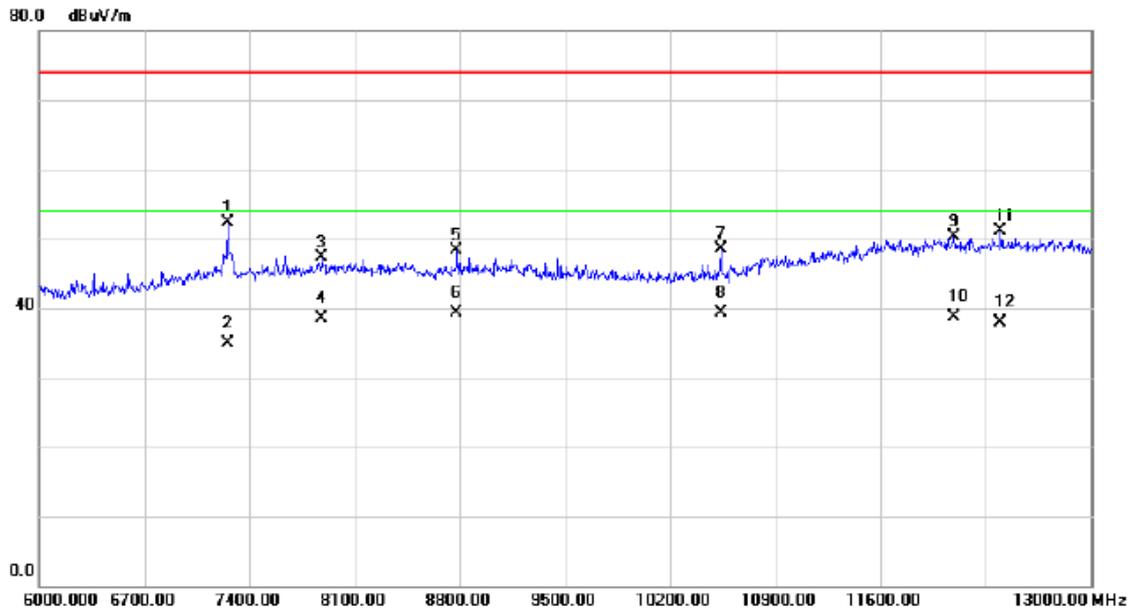

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7256.500	38.90	13.41	52.31	74.00	-21.69	peak	
2	7256.500	21.46	13.41	34.87	54.00	-19.13	AVG	
3	7883.000	33.20	14.17	47.37	74.00	-26.63	peak	
4	7883.000	24.41	14.17	38.58	54.00	-15.42	AVG	
5	8779.000	33.83	14.41	48.24	74.00	-25.76	peak	
6 *	8779.000	24.83	14.41	39.24	54.00	-14.76	AVG	
7	10536.00	33.81	14.78	48.59	74.00	-25.41	peak	
8	10536.00	24.45	14.78	39.23	54.00	-14.77	AVG	
9	12093.50	29.91	20.43	50.34	74.00	-23.66	peak	
10	12093.50	18.20	20.43	38.63	54.00	-15.37	AVG	
11	12398.00	30.63	20.48	51.11	74.00	-22.89	peak	
12	12398.00	17.37	20.48	37.85	54.00	-16.15	AVG	

Test Voltage:	AC 120V/60Hz
Test Mode:	USB copy(EUT with PC)+BT+2.4G WIFI+GPS+Camera on
Note:	USB Cable: PANG NGAI

## Horizontal

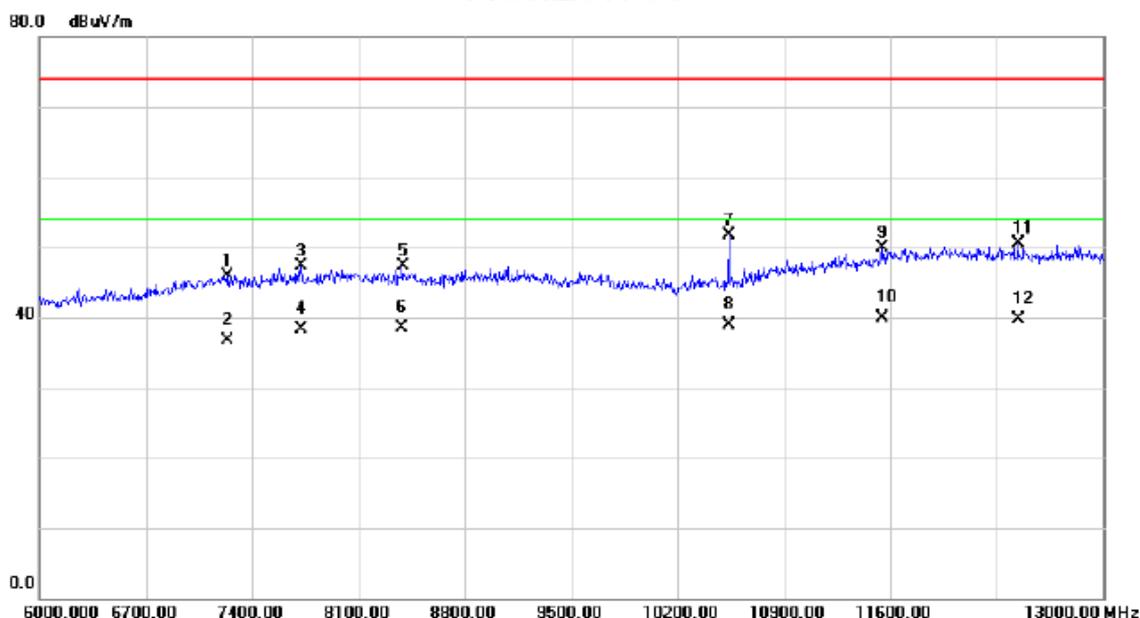

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7235.500	32.61	13.38	45.99	74.00	-28.01	peak	
2	7235.500	23.37	13.38	36.75	54.00	-17.25	AVG	
3	7722.000	33.23	13.98	47.21	74.00	-26.79	peak	
4	7722.000	24.34	13.98	38.32	54.00	-15.68	AVG	
5	8390.500	33.14	14.18	47.32	74.00	-26.68	peak	
6	8390.500	24.23	14.18	38.41	54.00	-15.59	AVG	
7	10536.00	36.84	14.78	51.62	74.00	-22.38	peak	
8	10536.00	24.18	14.78	38.96	54.00	-15.04	AVG	
9	11551.00	30.86	19.05	49.91	74.00	-24.09	peak	
10 *	11551.00	20.93	19.05	39.98	54.00	-14.02	AVG	
11	12440.00	29.98	20.49	50.47	74.00	-23.53	peak	
12	12440.00	19.29	20.49	39.78	54.00	-14.22	AVG	