



FCC Part22H&24E Test Report Industry Canada RSS-132/RSS-133

Product Name : WCDMA Digital Mobile Phone
Model No. : HUAWEI G350-U151
FCC ID : QISG350-U151

Applicant : Huawei Technologies Co., Ltd.

Address : Administration Building, Headquarters of Huawei
Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Date of Receipt : 12/03/2013
Test Date : 13/03/2013~06/04/2013
Issued Date : 21/04/2013
Report No. : 133S023R-HP-US-P07V01
Report Version : V 2.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, CNAS or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 21/04/2013

Report No. : 133S023R-HP-US-P07V01



Product Name : WCDMA Digital Mobile Phone
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Manufacturer : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C
Model No. : HUAWEI G350-U151
FCC ID : QISG350-U151
EUT Voltage : DC 3.7V
Brand Name : HUAWEI
Applicable Standard : FCC CFR Title 47 Part 2, TIA/EIA 603-C
FCC Part22 Subpart H, FCC Part24 Subpart E
Industry Canada RSS-132, Issue 3
Industry Canada RSS-133, Issue 6
Test Result : Complied
Performed Location : Suzhou EMC Laboratory
No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392

Documented By : Alice Mi
Reviewed By : Sunny Sun
Approved By : Robin Wu

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	:	BSMI, NCC, TAF
Germany	:	TUV Rheinland
Norway	:	Nemko, DNV
USA	:	FCC, NVLAP
Japan	:	VCCI
China	:	CNAS

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site :<http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site :
<http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yonghxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

LinKou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information.....	6
1.1. EUT Description	6
1.2. Mode of Operation.....	9
1.3. Tested System Details	10
1.4. Configuration of Tested System.....	11
1.5. EUT Exercise Software.....	12
2. Technical Test.....	13
2.1. Summary of Test Result.....	13
2.2. Test Environment.....	14
3. Peak Output Power	15
3.1. Test Equipment.....	15
3.2. Test Setup.....	16
3.3. Limit.....	16
3.4. Test Procedure	16
3.5. Uncertainty	18
3.6. Test Result.....	19
4. Modulation Characteristic	28
4.1. Test Equipment.....	28
4.2. Test Setup.....	28
4.3. Limit.....	28
4.4. Uncertainty	28
4.5. Test Result.....	28
The modulation of GSM/WCDMA was verified and confirmed compliance with requirement. 28	
5. Occupied Bandwidth.....	29
5.1. Test Equipment.....	29
5.2. Test Setup.....	29
5.3. Limit.....	30
5.4. Test Procedure	30
5.5. Uncertainty	30
5.6. Test Result.....	31
6. Spurious Emission At Antenna Terminals (+/- 1MHz).....	51
6.1. Test Equipment.....	51
6.2. Test Setup.....	51
6.3. Limit.....	52
6.4. Test Procedure	52

6.5. Uncertainty	52
6.6. Test Result.....	53
7. Spurious Emission.....	63
7.1. Test Equipment.....	63
7.2. Test Setup.....	64
7.3. Limit.....	64
7.4. Test Procedure	64
7.5. Uncertainty	66
7.6. Test Result.....	67
8. Frequency Stability Under Temperature & Voltage Variations.....	107
8.1. Test Equipment.....	107
8.2. Test Setup.....	107
8.3. Limit.....	108
8.4. Test Procedure	108
8.5. Uncertainty	108
8.6. Test Result.....	109
9. Receiver Spurious Emission for RSS 132/133.....	119
9.1. Test Equipment.....	119
9.2. Test Setup.....	120
9.3. Limit.....	121
9.4. Test Procedure	121
9.5. Uncertainty	122
9.6. Test Result.....	123

1. General Information

1.1. EUT Description

Product Name	WCDMA Digital Mobile Phone
Model No.	HUAWEI G350-U151
Hardware Version	P2
Software Version for single card	G350-U151V100R001C00B118
Software Version for double card	G350-U351V100R001C00B123
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GPS	
Class of SRD	Class 3
2G	
Support Band	GSM850/PCS1900
GPRS Class	Class 12
Uplink	GSM 850: 824~849MHz PCS 1900: 1850~1910MHz
Downlink	GSM 850: 869~894MHz PCS 1900: 1930~1990MHz
Release Version	Rel-6
Type of modulation	GMSK for GSM/GPRS; 8PSK for EDGE
Antenna Gain	GSM 850: -2.50dBi PCS1900: 0.50dBi
3G	
Support Band	WCDMA Band II/WCDMA Band V
Uplink	WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz
Downlink	WCDMA Band II: 1930~1990MHz WCDMA Band V: 869~894MHz
Release Version	UMTS FDD: Rel-6
Type of modulation	QPSK
Antenna Gain	WCDMA Band II: 1.20dBi WCDMA Band V: -0.50dBi

Bluetooth	
Bluetooth Frequency	2402~2480MHz
Bluetooth Version	V2.1 + EDR
Type of modulation	FHSS
Data Rate	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK)
Antenna Gain	0.41dBi
Wi-Fi	
Wi-Fi Frequency	802.11b/g/n(20MHz): 2412 ~ 2462 MHz
Type of modulation	802.11b: DSSS; 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11 Mbps
	802.11g: 6/9/12/18/24/36/48/54 Mbps
	802.11n: up to 150 Mbps
Antenna Gain	-1.52dBi
Components	
Headset Model Number #1	HUAWEI/ 125G#+3261# 3.5MM-2
Headset Model Number #2	HUAWEI/ MEMD1532A761009
Battery #1	Brand Name: HUAWEI M/N: HB5V1HV Rated Voltage and Capacitance: 3.8V/1950mAh S/N: YAID130X16909379
Battery #2	Brand Name: HUAWEI M/N: HB5V1HV Rated Voltage and Capacitance: 3.8V/1950mAh S/N: YQCD104916910878
Battery #3	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: GAGD217L20001271
Battery #4	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: CABD110L20002578
Battery #5	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: BAACB22L24638179

Adapter #1	Brand Name: HUAWEI M/N: HW-050100U1W Input: 100-240V~50/60Hz 0.2A MAX Output: 5Vdc, 1.0A S/N: HKAD10400753
Adapter #2	Brand Name: HUAWEI M/N: HW-050100U1W Input: 100-240V~50/60Hz 0.2A MAX Output: 5Vdc, 1.0A S/N: TPACC0860553

1.2. Mode of Operation

QuieTek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: GSM 850 Link
Mode 2: PCS 1900 Link
Mode 3: EDGE 850 Link
Mode 4: EDGE 1900 Link
Mode 5: WCDMA Band II Link
Mode 6: WCDMA Band V Link
Mode 7: HSDPA Band II Link
Mode 8: HSDPA Band V Link
Mode 9: HSUPA Band II Link
Mode 10: HSUPA Band V Link

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. This device supports dual SIM slots and single SIM slot, which was compared and showed the worst result on this report.
3. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
4. Radiated power output working at GSM link was higher than that working at GPRS link, so all of test items were done working at GSM mode. Refer to peak power output for more details.
5. This device is a composite device in accordance with Part 15 Subpart B regulations. The report number is 133293R-ITUSP01V02.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.	Power Cord
1	CMU200	R&S	CMU200	N/A	N/A

1.4. Configuration of Tested System

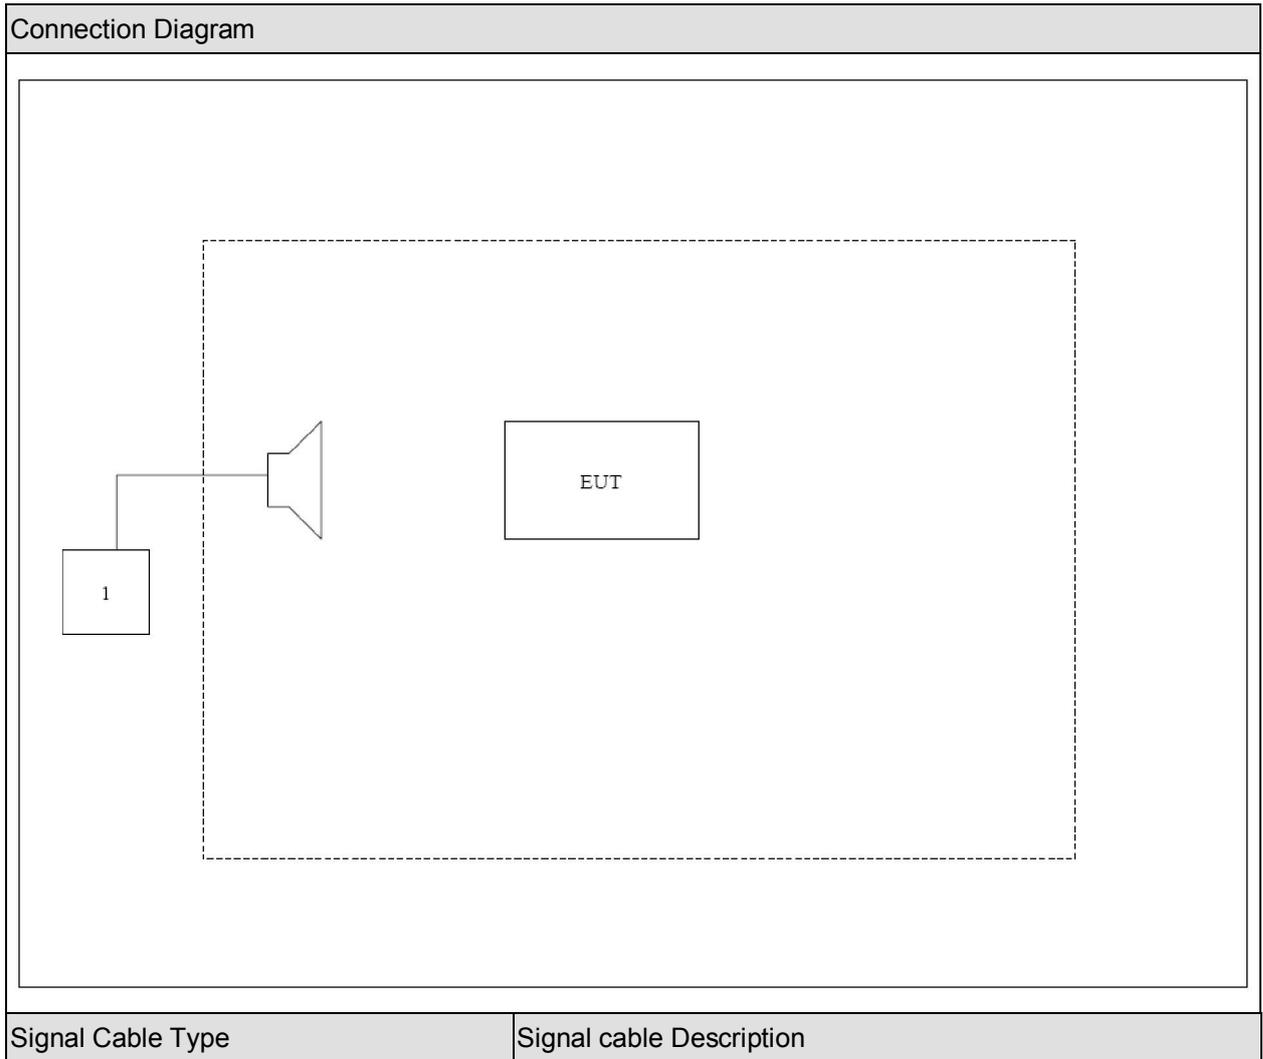

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	EUT Communicate with CMU200, then select channel to test.

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
- Deviations from the test standards as below description:

For GSM 850/WCDMA Band V (FCC Part 22H & Part 2)

Performed Item	Section in CFR 47	Section in RSS GEN or RSS-132	Test Performed	Deviation
Peak Output Power	FCC Part 22.913(a)(2) and Part 2.1046	4.4	Yes	No
Modulation Characteristic	FCC Part 2.1047(d)	4.2	Yes	No
Occupied Bandwidth	FCC Part 2.1049	RSS GEN 4.6	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 22.917(a) and Part 2.1049	4.5	Yes	No
Spurious Emission	FCC Part 22.917(b) and Part 2.1051, 2.1053	4.5, 4.6	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 22.355 and 2.1055	4.3	Yes	No

For PCS1900, and WCDMA Band II (FCC Part 24E & Part 2)

Performed Item	Section in CFR 47	Section in RSS GEN or RSS-133	Test Performed	Deviation
Peak Output Power	FCC Part 24.232(b) and Part 2.1046	6.4	Yes	No
Modulation Characteristic	FCC Part 2.1047(d)	6.2	Yes	No
Occupied Bandwidth	FCC Part 24.238(b) and Part 2.1049	RSS GEN 4.6	Yes	No
Spurious Emission At Antenna Terminals (+/- 1MHz)	FCC Part 24.238(a) and Part 2.1049	6.5	Yes	No
Spurious Emission	FCC Part 24.238(b) and Part 2.1051, 2.1053	6.5, 6.6	Yes	No
Frequency Stability Under Temperature & Voltage Variations	FCC Part 24.235 and 2.1055	6.3	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	23
Humidity (%RH)	25-75	52
Barometric pressure (mbar)	860-1060	950-1000

3. Peak Output Power


3.1. Test Equipment

Spurious Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2014.03.30
Radio Communication Tester	R&S	CMU 200	117088	2014.03.30
Dual Directional Coupler	Agilent	778D	20160	2014.03.30
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2014.03.30
PSG Analog Signal Generator	Agilent	E8257D	MY44321116	2014.03.30
Preamplifier	QuieTek	AP-025C	CHM-0503006	2014.04.11
Preamplifier	Miteq	NSP1800-25	1364185	2013.05.04
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2013.10.15
Half Wave Tuned Dipole Antenna	COM-POWER	AD-100	40137	2013.11.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	737	2013.11.24
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2014.06.08
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2014.01.11

3.2. Test Setup

Conducted Power Measurement:

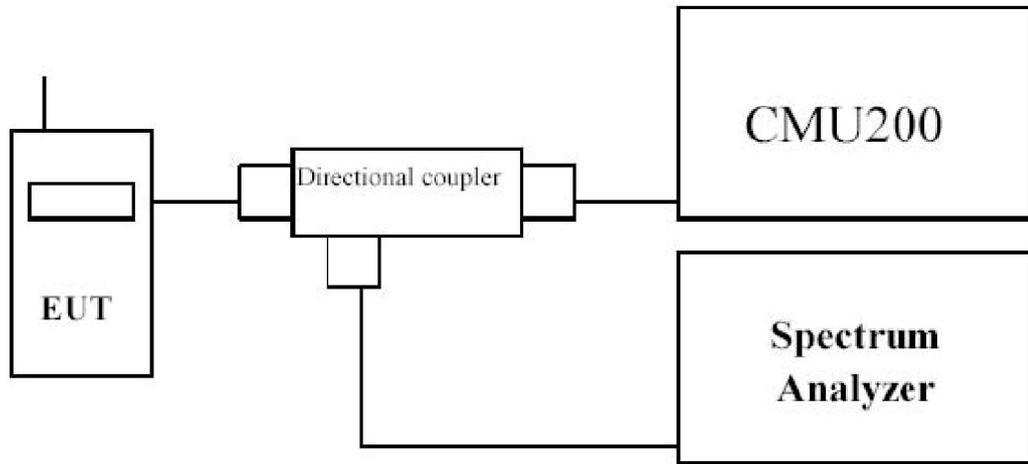

Radiated Power Measurement:

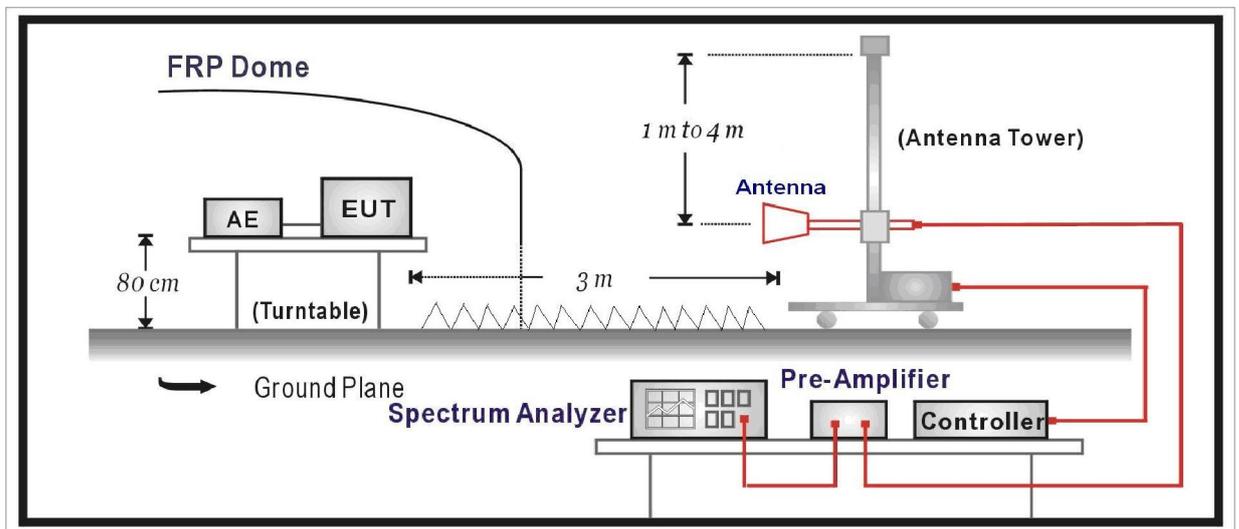

3.3. Limit

For FCC Part 22.913(a)(2):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC Part 24.232(b):

The EIRP of mobile transmitters and auxiliary test transmitters must not exceed 2 Watts.

3.4. Test Procedure

Conducted Power Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMU200 by a Directional Couple.
- c) EUT Communicate with CMU200, then selects a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.

Radiated Power Measurement:

- e) The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- f) The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- g) The output of the test antenna shall be connected to the measuring receiver.
- h) The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- i) The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- j) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- k) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- l) The maximum signal level detected by the measuring receiver shall be noted.
- m) The transmitter shall be replaced by a substitution antenna.
- n) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- o) The substitution antenna shall be connected to a calibrated signal generator.
- p) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- q) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- r) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- s) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- t) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if

necessary.

- u) Test site anechoic chamber refer to ANSI C63.4: 2009.

3.5. Uncertainty

The measurement uncertainty is defined as for Conducted Power Measurement ± 1.2 dB, for Radiated Power Measurement ± 3.2 dB

3.6. Test Result

GSM850

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	ERP (dBm)	Limit (dBm)
128	824.2	GMSK	32.44	28.84	38.50
189	836.4	GMSK	32.66	29.33	38.50
251	848.8	GMSK	32.71	30.07	38.50

PCS1900

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)
512	1850.2	GMSK	29.70	30.01	33.00
661	1880.0	GMSK	29.52	29.75	33.00
810	1909.8	GMSK	29.39	29.44	33.00

Note: The maximum PAR for PCS1900 is 7.9dB less than 13 dB.

GPRS850

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	ERP (dBm)	Limit (dBm)
128	824.2	GMSK	32.49	28.65	38.50
189	836.4	GMSK	32.56	28.49	38.50
251	848.8	GMSK	32.74	29.94	38.50

GPRS1900

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)
512	1850.2	GMSK	29.72	29.89	33.00
661	1880.0	GMSK	29.53	29.63	33.00
810	1909.8	GMSK	29.41	29.31	33.00

Note: The maximum PAR for GPRS1900 is 8.2dB less than 13 dB.

EDGE850

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	ERP (dBm)	Limit (dBm)
128	824.2	8PSK	27.22	26.77	38.50
189	836.4	8PSK	27.44	26.83	38.50
251	848.8	8PSK	27.46	26.94	38.50

EDGE1900

Channel No.	Frequency (MHz)	Modulation	Conducted Power (dBm)	EIRP (dBm)	Limit (dBm)
512	1850.2	8PSK	25.96	26.06	33.00
661	1880.0	8PSK	25.73	26.00	33.00
810	1909.8	8PSK	25.65	25.91	33.00

Note: The maximum PAR for EDGE1900 is 8.8dB less than 13 dB.

WCDMA/HSDPA/HSUPA

Mode	3GPP Subtest	Band II (1900MHz) Channel						MPR
		Conducted Power (dBm)			EIRP (dBm)			
		9262	9400	9538	9262	9400	9538	
WCDMA R99	1	23.49	23.03	22.75	24.63	23.73	23.39	N/A
Rel5 HSDPA	1	23.33	22.83	22.66	24.78	23.58	23.42	0
	2	23.29	22.74	22.65	---	---	---	0
	3	22.81	22.31	22.12	---	---	---	0.5
	4	22.80	22.29	22.13	---	---	---	0.5
Rel6 HSUPA	1	23.24	22.69	22.59	24.32	23.42	23.14	0.0
	2	21.20	20.55	20.40	---	---	---	2.0
	3	22.25	21.54	21.37	---	---	---	1.0
	4	21.22	20.47	20.57	---	---	---	2.0
	5	23.22	22.57	22.47	---	---	---	0.0

Note: The maximum PAR for WCDMA Band II is 10.8dB less than 13 dB.

Mode	3GPP Subtest	Band V (850MHz) Channel						MPR
		Conducted Power (dBm)			ERP (dBm)			
		4132	4182	4233	4132	4182	4233	
WCDMA R99	1	23.36	23.42	23.43	22.57	22.59	22.67	N/A
Rel5 HSDPA	1	22.96	23.01	23.03	22.66	22.53	22.89	0
	2	22.95	22.99	23.01	---	---	---	0
	3	22.43	22.47	22.51	---	---	---	0.5
	4	22.42	22.45	22.47	---	---	---	0.5
Rel6 HSUPA	1	22.93	22.95	23.01	22.16	22.44	22.93	0.0
	2	20.89	20.91	21.02	---	---	---	2.0
	3	21.92	21.89	22.05	---	---	---	1.0
	4	20.91	20.92	21.07	---	---	---	2.0
	5	22.92	22.94	22.99	---	---	---	0.0

Note: All conducted measurements are based on a RMS detector.

Radiated Measurement

GSM850

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
824.2	-14.48	H	19.28	1.76	-0.02	17.50	38.50	-21.00
824.2	-3.88	V	30.62	1.76	-0.02	28.84	38.50	-9.66
Middle Channel 189 (836.40MHz)								
836.4	-15.10	H	18.92	1.75	0.10	17.27	38.50	-21.23
836.4	-3.78	V	30.98	1.75	0.10	29.33	38.50	-9.17
High Channel 251 (848.80MHz)								
848.8	-15.10	H	18.92	1.78	0.13	17.27	38.50	-21.23
848.8	-2.89	V	31.72	1.78	0.13	30.07	38.50	-8.43

PCS1900

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
1850.2	23.69	H	22.29	2.68	10.40	30.01	33.00	-2.99
1850.2	13.38	V	11.79	2.68	10.40	19.51	33.00	-13.49
Middle Channel 661 (1880.00MHz)								
1880.0	23.50	H	22.00	2.68	10.43	29.75	33.00	-3.25
1880.0	13.36	V	11.52	2.68	10.43	19.27	33.00	-13.73
High Channel 810 (1909.80MHz)								
1909.8	23.05	H	21.70	2.70	10.44	29.44	33.00	-3.56
1909.8	12.48	V	10.68	2.70	10.44	18.42	33.00	-14.58

GPRS850

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
824.2	-14.83	H	18.93	1.76	-0.02	17.15	38.50	-21.35
824.2	-4.07	V	30.43	1.76	-0.02	28.65	38.50	-9.85
Middle Channel 189 (836.40MHz)								
836.4	-16.32	H	17.57	1.75	0.10	15.92	38.50	-22.58
836.4	-4.39	V	30.38	1.75	0.10	28.73	38.50	-9.77
High Channel 251 (848.80MHz)								
848.8	-16.48	H	17.54	1.78	0.13	15.89	38.50	-22.61
848.8	-3.02	V	31.59	1.78	0.13	29.94	38.50	-8.56

GPRS1900

Frequency (MHz)	SA Reading (dBm)	Ant .Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
1850.2	23.57	H	22.17	2.68	10.40	29.89	33.00	-3.11
1850.2	12.88	V	11.29	2.68	10.40	19.01	33.00	-13.99
Middle Channel 661 (1880.00MHz)								
1880.0	23.38	H	21.88	2.68	10.43	29.63	33.00	-3.37
1880.0	13.21	V	11.37	2.68	10.43	19.12	33.00	-13.88
High Channel 810 (1909.80MHz)								
1909.8	22.92	H	21.57	2.70	10.44	29.31	33.00	-3.51
1909.8	11.83	V	10.04	2.70	10.44	17.78	33.00	-15.22

EDGE 850

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 128 (824.20MHz)								
824.2	-16.93	H	16.82	1.76	-0.02	15.04	38.50	-23.46
824.2	-5.94	V	28.55	1.76	-0.02	26.77	38.50	-11.73
Middle Channel 189 (836.40MHz)								
836.4	-17.33	H	16.56	1.75	0.10	14.91	38.50	-23.59
836.4	-6.28	V	28.48	1.75	0.10	26.83	38.50	-11.67
High Channel 251 (848.80MHz)								
848.8	-17.33	H	16.68	1.78	0.13	15.03	38.50	-23.47
848.8	-6.02	V	28.59	1.78	0.13	26.94	38.50	-11.56

EDGE1900

Frequency (MHz)	SA Reading (dBm)	Ant .Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 512 (1850.20MHz)								
1850.2	19.74	H	18.34	2.68	10.40	26.06	33.00	-6.94
1850.2	9.98	V	8.39	2.68	10.40	16.11	33.00	-16.89
Middle Channel 661 (1880.00MHz)								
1880.0	19.75	H	18.25	2.68	10.43	26.00	33.00	-7.00
1880.0	10.05	V	8.21	2.68	10.43	15.96	33.00	-17.04
High Channel 810 (1909.80MHz)								
1909.8	19.52	H	18.17	2.70	10.44	25.91	33.00	-7.09
1909.8	8.55	V	6.76	2.70	10.44	14.50	33.00	-18.50

WCDMA Band II

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	ERIP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)								
1852.4	18.32	H	17.78	3.55	10.40	24.63	33.00	-8.37
1852.4	6.74	V	6.01	3.55	10.40	12.86	33.00	-20.14
Middle Channel 9400 (1880.00MHz)								
1880.0	17.47	H	16.83	3.53	10.43	23.73	33.00	-9.27
1880.0	6.30	V	5.31	3.53	10.43	12.21	33.00	-20.79
High Channel 9538 (1907.60MHz)								
1907.6	17.07	H	16.51	3.56	10.44	23.39	33.00	-9.61
1907.6	5.81	V	4.81	3.56	10.44	11.69	33.00	-21.31

WCDMA Band V

Frequency (MHz)	SA Reading (dBm)	Ant .Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.40MHz)								
826.4	-21.86	H	12.68	2.56	-0.02	10.10	38.50	-28.40
826.4	-10.19	V	25.15	2.56	-0.02	22.57	38.50	-15.93
Middle Channel 4182 (836.40MHz)								
836.4	-23.73	H	10.99	2.59	0.10	8.50	38.50	-30.00
836.4	-10.51	V	25.08	2.59	0.10	22.59	38.50	-15.91
High Channel 4233 (846.60MHz)								
846.6	-23.19	H	11.51	2.54	0.13	9.10	38.50	-29.40
846.6	-10.30	V	25.08	2.54	0.13	22.67	38.50	-15.83

HSDPA Band II

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)								
1852.4	18.46	H	17.93	3.55	10.40	24.78	33.00	-8.22
1852.4	12.67	V	11.94	3.55	10.40	18.79	33.00	-14.21
Middle Channel 9400 (1880.00MHz)								
1880.0	17.33	H	16.68	3.53	10.43	23.58	33.00	-9.42
1880.0	10.35	V	9.37	3.53	10.43	16.27	33.00	-16.73
High Channel 9538 (1907.60MHz)								
1907.6	17.09	H	16.54	3.56	10.44	23.42	33.00	-9.58
1907.6	12.62	V	11.63	3.56	10.44	18.51	33.00	-14.49

HSDPA Band V

Frequency (MHz)	SA Reading (dBm)	Ant .Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.40MHz)								
826.4	-21.27	H	13.59	2.56	-0.02	11.01	38.50	-27.49
826.4	-10.31	V	25.24	2.56	-0.02	22.66	38.50	-15.84
Middle Channel 4182 (836.40MHz)								
836.4	-22.71	H	11.97	2.59	0.10	9.48	38.50	-29.02
836.4	-10.53	V	25.02	2.59	0.10	22.53	38.50	-15.97
High Channel 4233 (846.60MHz)								
846.6	-22.37	H	12.32	2.54	0.13	9.91	38.50	-28.59
846.6	-10.08	V	25.30	2.54	0.13	22.89	38.50	-15.61

HSUPA Band II

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 9262 (1852.40MHz)								
1852.4	18.01	H	17.47	3.55	10.40	24.32	33.00	-8.68
1852.4	12.75	V	12.01	3.55	10.40	18.86	33.00	-14.14
Middle Channel 9400 (1880.00MHz)								
1880.0	17.16	H	16.52	3.53	10.43	23.42	33.00	-9.58
1880.0	10.04	V	9.05	3.53	10.43	15.95	33.00	-17.05
High Channel 9538 (1907.60MHz)								
1907.6	16.82	H	16.26	3.56	10.44	23.14	33.00	-9.86
1907.6	12.51	V	11.53	3.56	10.44	18.41	33.00	-14.59

HSUPA Band V

Frequency (MHz)	SA Reading (dBm)	Ant. Pol. (H/V)	SG Reading (dBm)	Cable Loss (dB)	Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)
Low Channel 4132 (826.40MHz)								
826.4	-21.23	H	13.31	2.56	-0.02	10.73	38.50	-27.77
826.4	-10.58	V	24.74	2.56	-0.02	22.16	38.50	-16.34
Middle Channel 4182 (836.40MHz)								
836.4	-22.54	H	12.11	2.59	0.10	9.62	38.50	-28.88
836.4	-10.67	V	24.93	2.59	0.10	22.44	38.50	-16.06
High Channel 4233 (846.60MHz)								
846.6	-17.93	H	17.44	2.54	0.13	15.03	38.50	-23.47
846.6	-9.38	V	25.34	2.54	0.13	22.93	38.50	-15.57


4. Modulation Characteristic

4.1. Test Equipment

Modulation Characteristic / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2014.03.30
Radio Communication Tester	R&S	CMU 200	117088	2014.03.30
Dual Directional Coupler	Agilent	778D	20160	2014.03.30
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2014.03.30
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2014.01.11

4.2. Test Setup

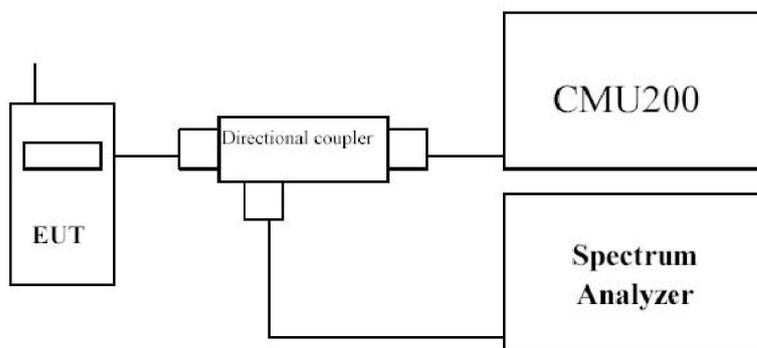

4.3. Limit

N/A

4.4. Uncertainty

The measurement uncertainty is defined as 0.1%

4.5. Test Result

The modulation of GSM/WCDMA was verified and confirmed compliance with requirement.


5. Occupied Bandwidth

5.1. Test Equipment

Occupied Bandwidth / AC-6

Instrument	Manufacturer	Type No.	Serial No	Cali. Due Date
PSA Series Spectrum Analyzer	Agilent	E4440A	MY49420184	2014.03.30
Radio Communication Tester	R&S	CMU 200	117088	2014.03.30
Dual Directional Coupler	Agilent	778D	20160	2014.03.30
10dB Coaxial Coupler	Agilent	87300C	MY44300299	2014.03.30
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC6-TH	2014.01.11

5.2. Test Setup

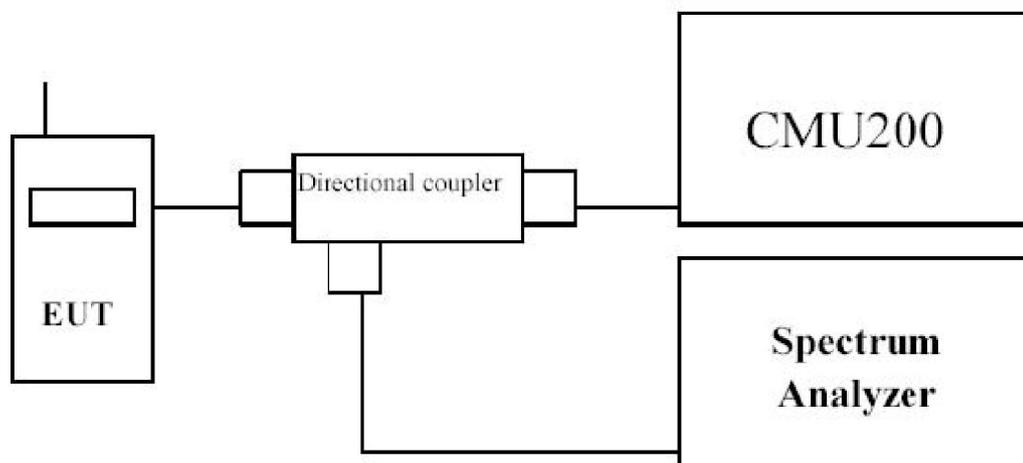

5.3. Limit

N/A

5.4. Test Procedure

Using Occupied Bandwidth measurement function of spectrum analyzer, and setting as follows:

For GSM/GPRS/EDGE 850/1900 test --- RBW = 3 kHz and VBW = 10 kHz

For WCDMA/HSDPA/HSUPA FDD Band II/V test --- RBW = 50 kHz and VBW = 200 kHz

5.5. Uncertainty

The measurement uncertainty is defined as ± 10 Hz

5.6. Test Result

Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: GSM 850 Link		
Date of Test	2013/04/01	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	312.40	245.65
189	836.40	311.33	250.75
251	848.80	310.36	246.16


Figure Channel 128 (824.20MHz)



Figure Channel 189 (836.40MHz)



Figure Channel 251 (848.80MHz)

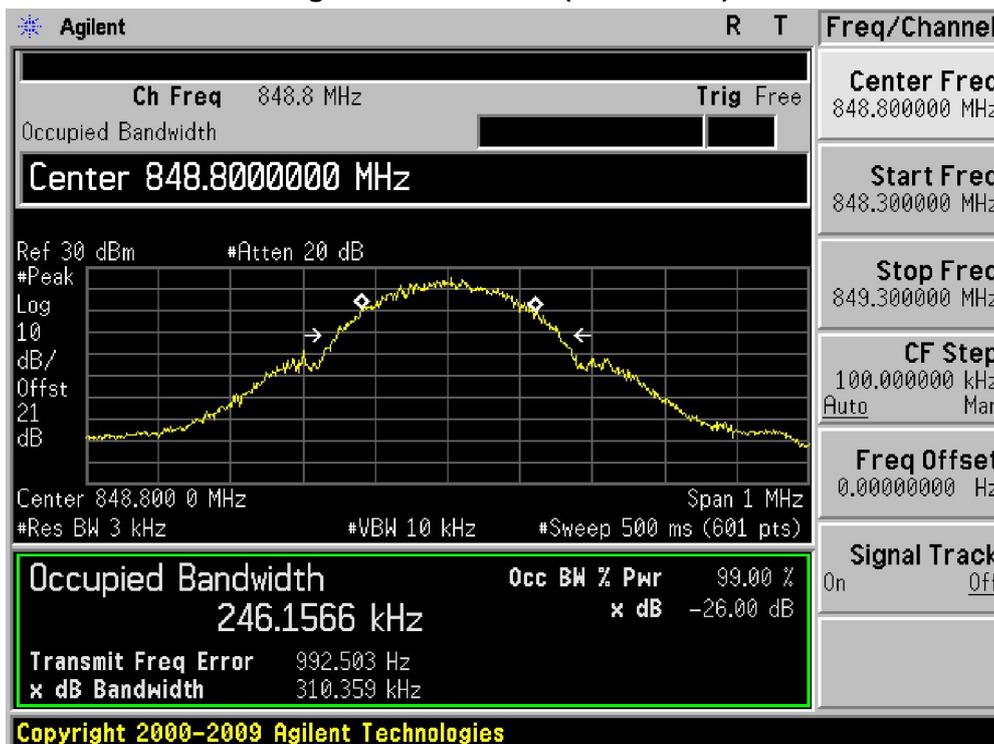

Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 2: PCS 1900 Link		
Date of Test	2013/04/01	Test Site	AC-6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	312.97	245.63
661	1880.00	310.29	244.80
810	1909.80	314.55	246.59

Figure Channel 512 (1850.20MHz)



Figure Channel 661 (1880.00MHz)



Figure Channel 810 (1909.80MHz)



Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 3: EDGE 850 Link		
Date of Test	2013/04/01	Test Site	AC6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
128	824.20	308.59	243.37
189	836.40	305.06	243.26
251	848.80	305.66	245.82

Figure Channel 128 (824.20MHz)

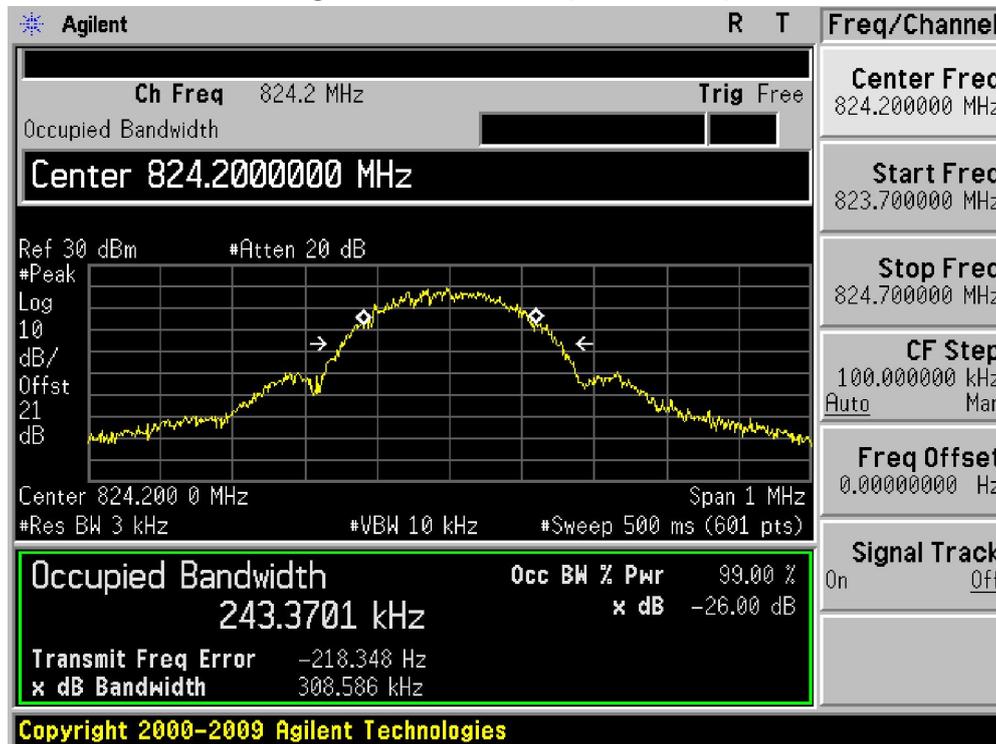


Figure Channel 189 (836.40MHz)

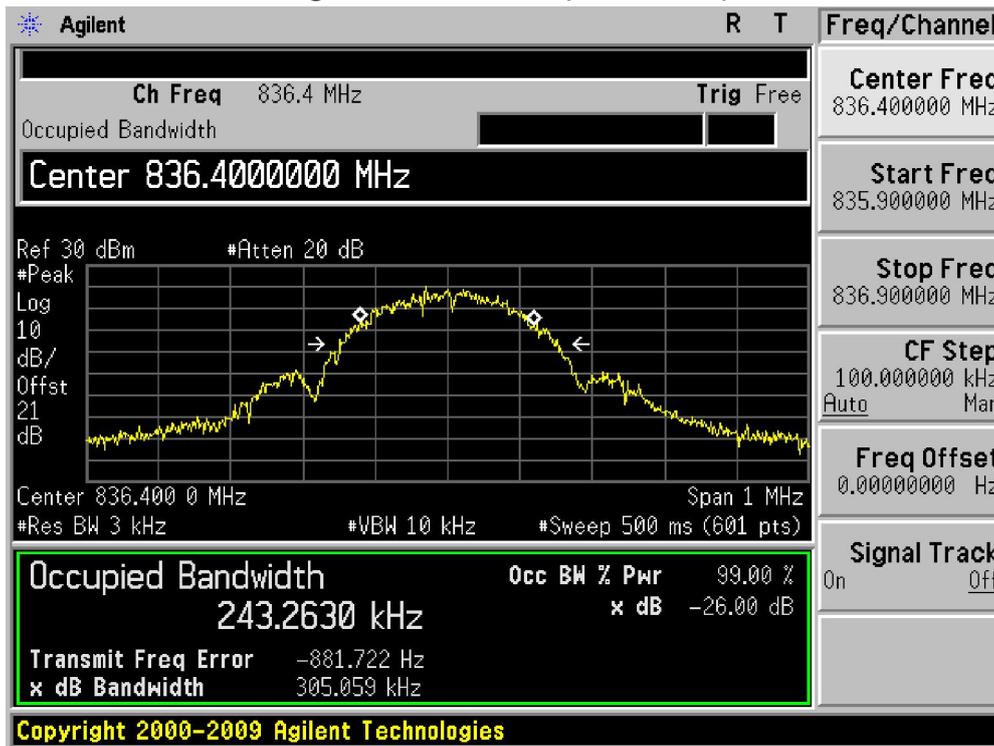


Figure Channel 251 (848.80MHz)



Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 4: EDGE 1900 Link		
Date of Test	2013/04/01	Test Site	AC6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
512	1850.20	298.60	242.91
661	1880.00	31711	245.81
810	1909.80	308.28	245.27

Figure Channel 512 (1850.20MHz)



Figure Channel 661 (1880.00MHz)



Figure Channel 810 (1909.80MHz)



Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 5: WCDMA Band II Link		
Date of Test	2013/04/01	Test Site	AC6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
9262	1852.4	4647.00	4148.50
9400	1880.0	4643.00	4151.80
9538	1907.6	4640.00	4153.60

Figure Channel 9262 (1852.40MHz)

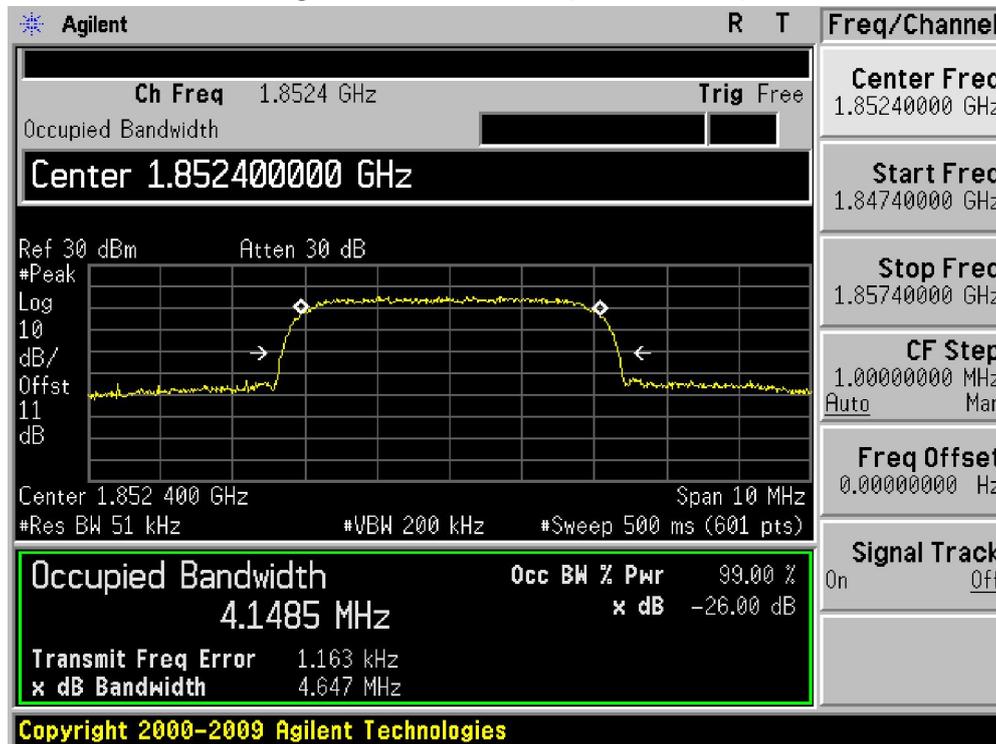


Figure Channel 9400 (1880.0MHz)


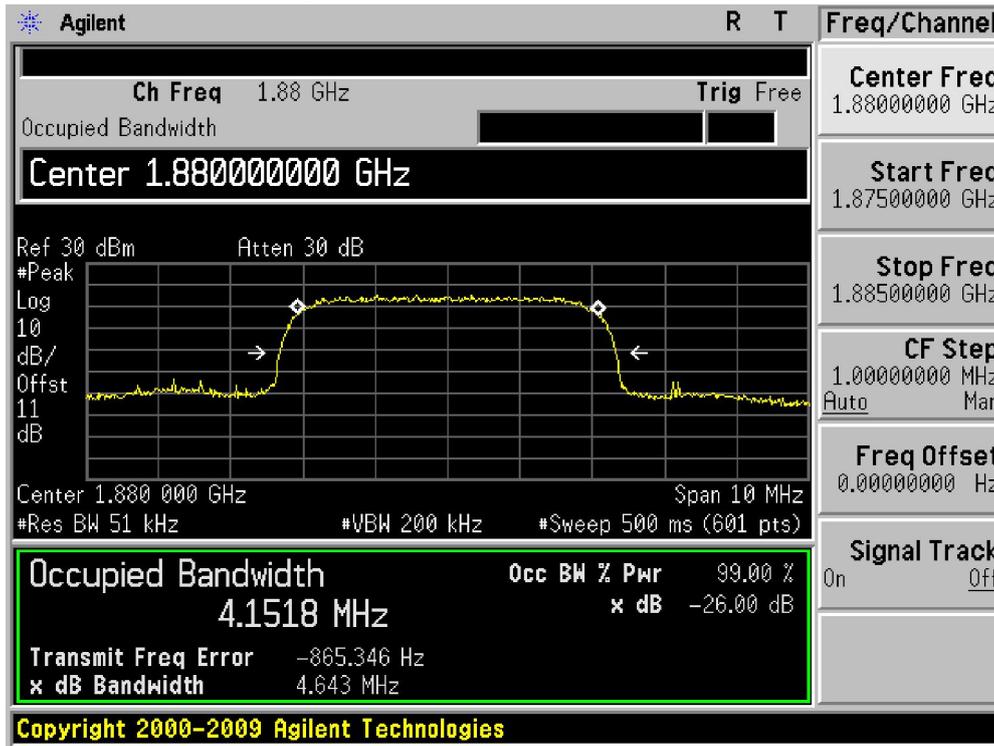


Figure Channel 9538 (1907.60MHz)

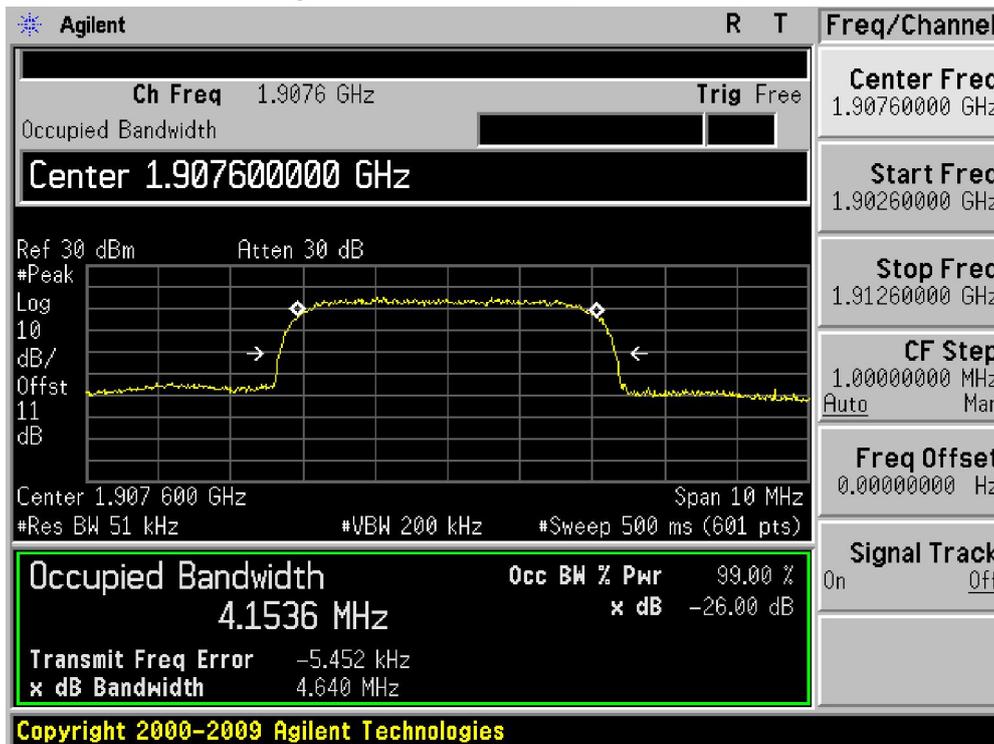

Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 6: WCDMA Band V Link		
Date of Test	2013/04/01	Test Site	AC6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
4132	826.4	4638.00	4129.10
4182	836.4	4624.00	4136.10
4233	846.6	4629.00	4136.70

Figure Channel 4132 (826.40MHz)

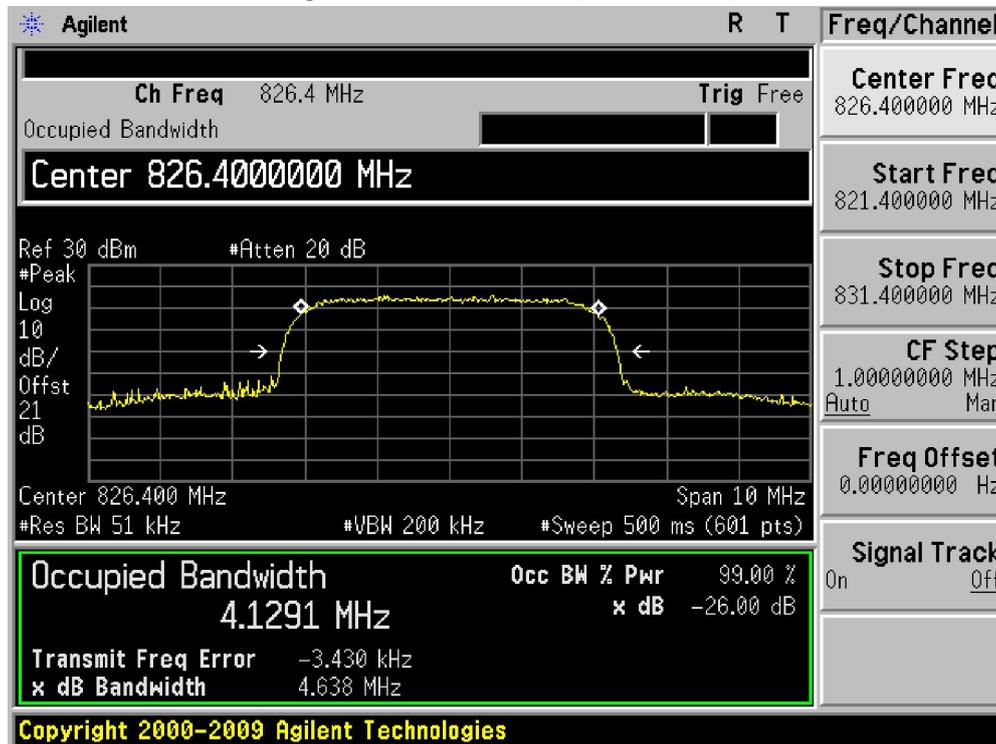


Figure Channel 4182 (836.40MHz)


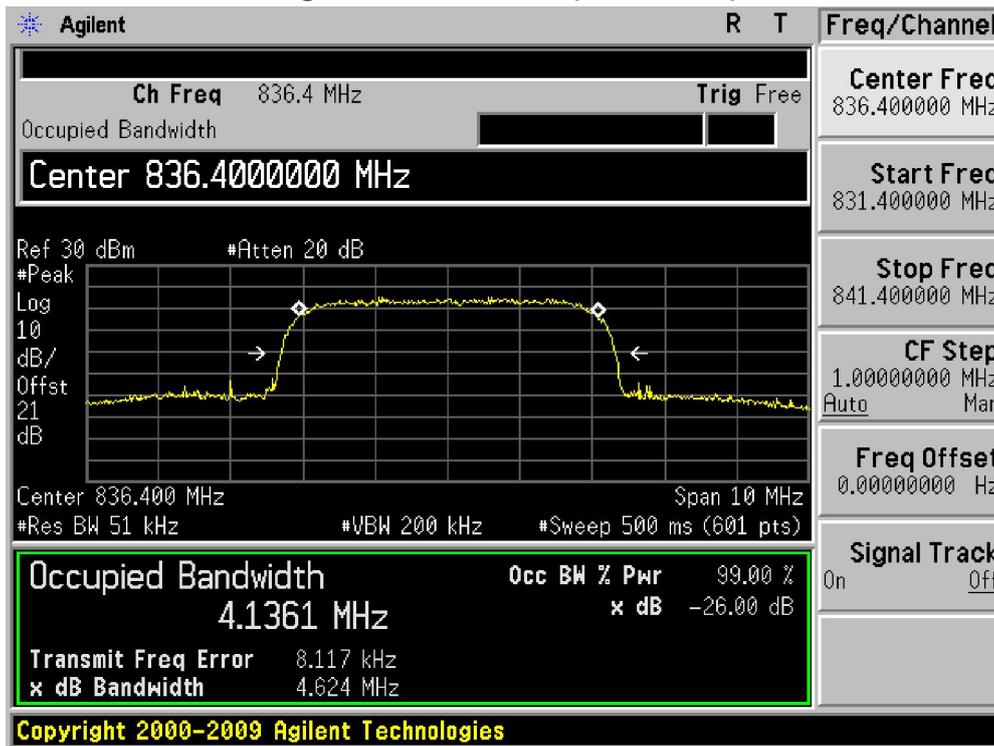


Figure Channel 4233(846.60MHz)

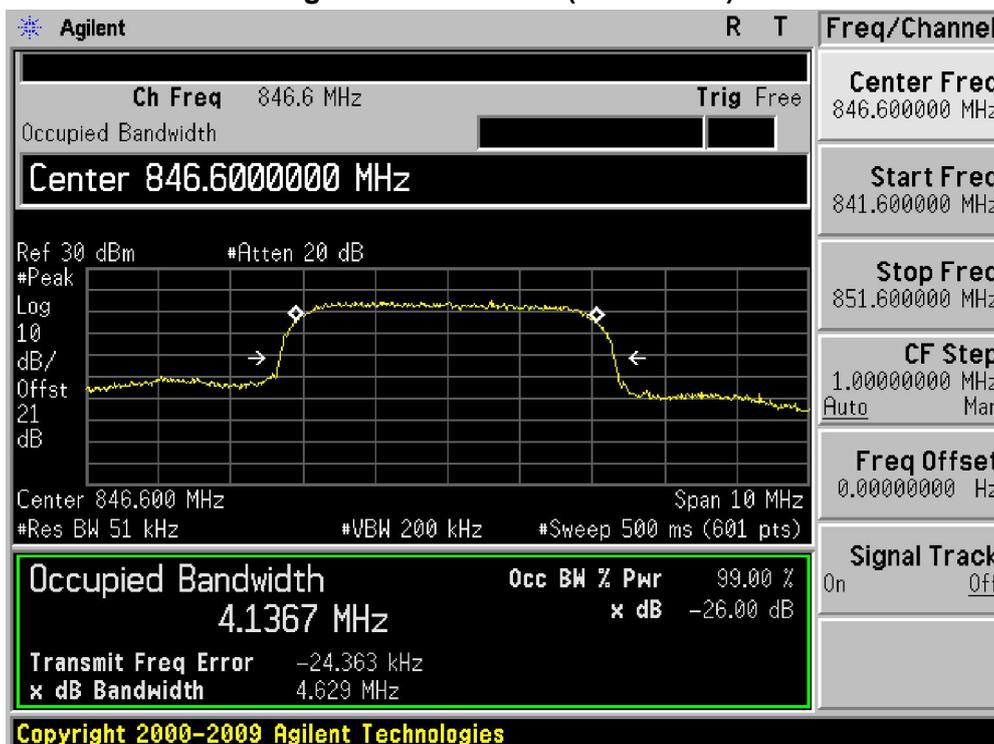

Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 7: HSDPA Band II Link		
Date of Test	2013/04/01	Test Site	AC6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
9262	1852.4	4655.00	4151.90
9400	1880.0	4637.00	4155.10
9538	1907.6	4650.00	4159.70

Figure Channel 9262 (1852.40MHz)

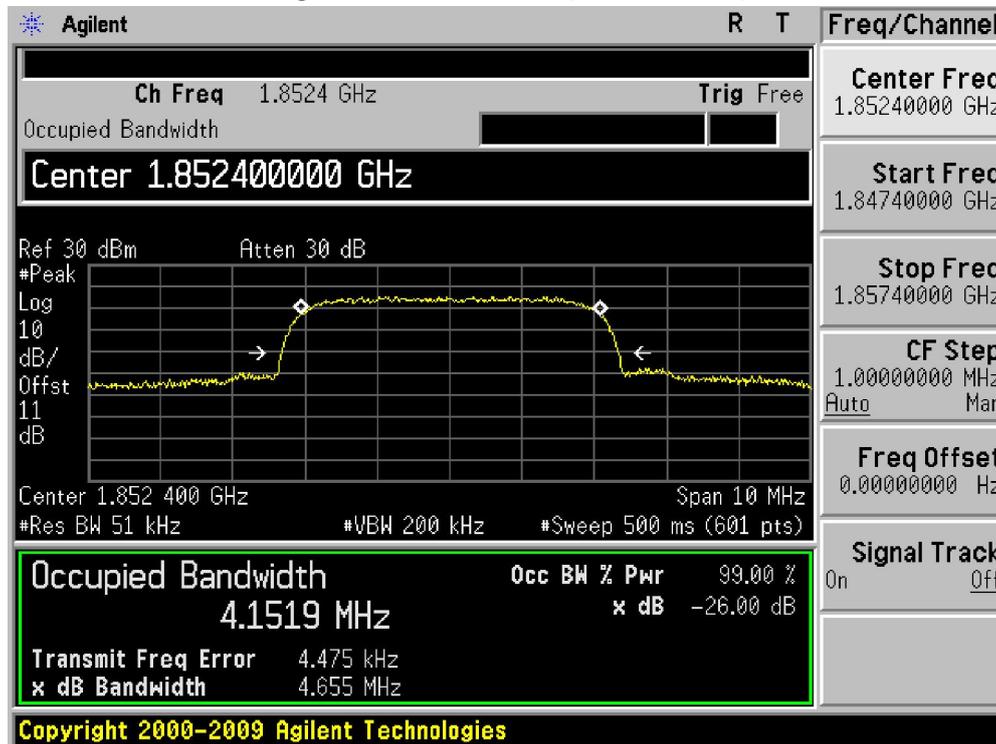


Figure Channel 9400 (1880.00MHz)


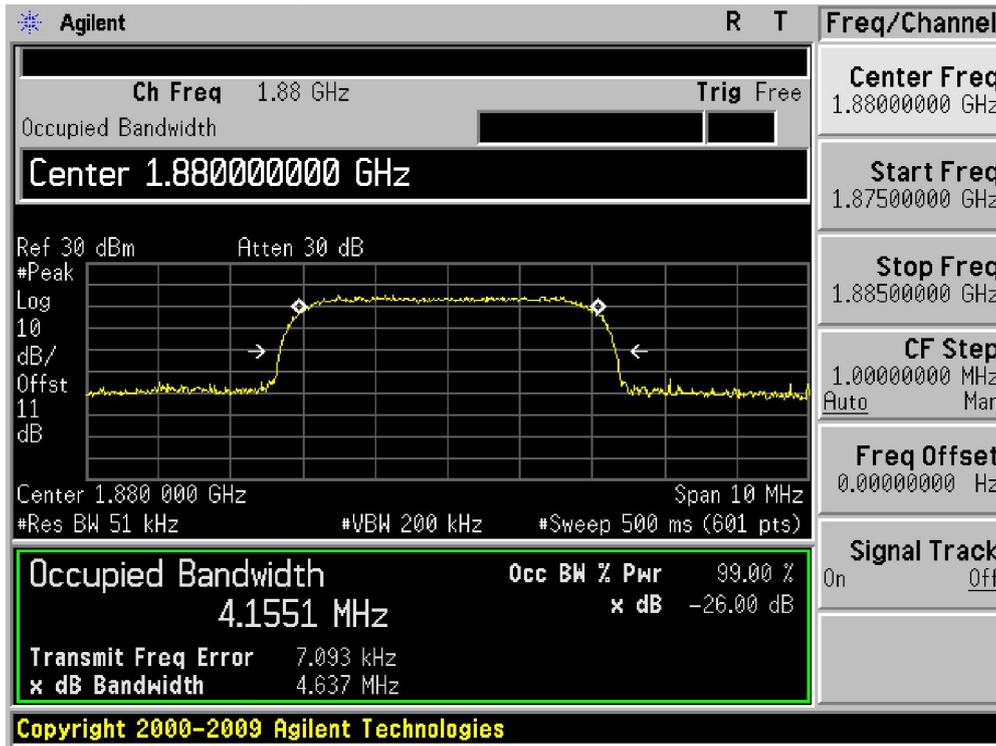


Figure Channel 9538 (1907.60MHz)

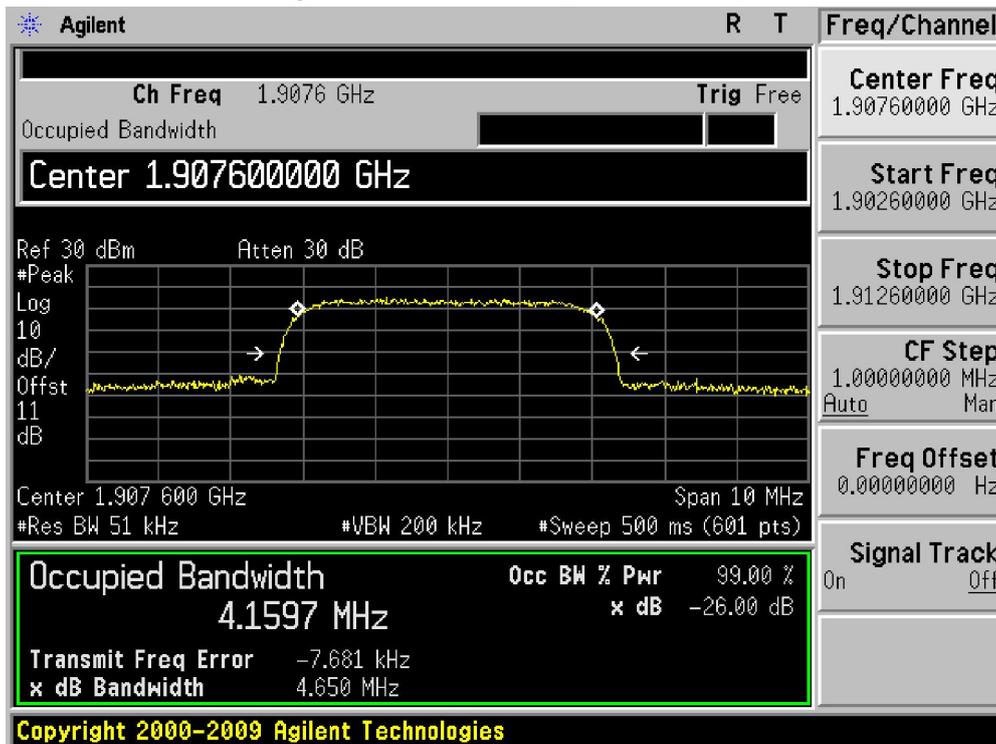

Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 8: HSDPA Band V Link		
Date of Test	2013/04/01	Test Site	AC6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
4132	826.4	4638.00	4135.60
4182	836.4	4636.00	4142.40
4233	846.6	4634.00	4143.20

Figure Channel 4132 (826.40MHz)

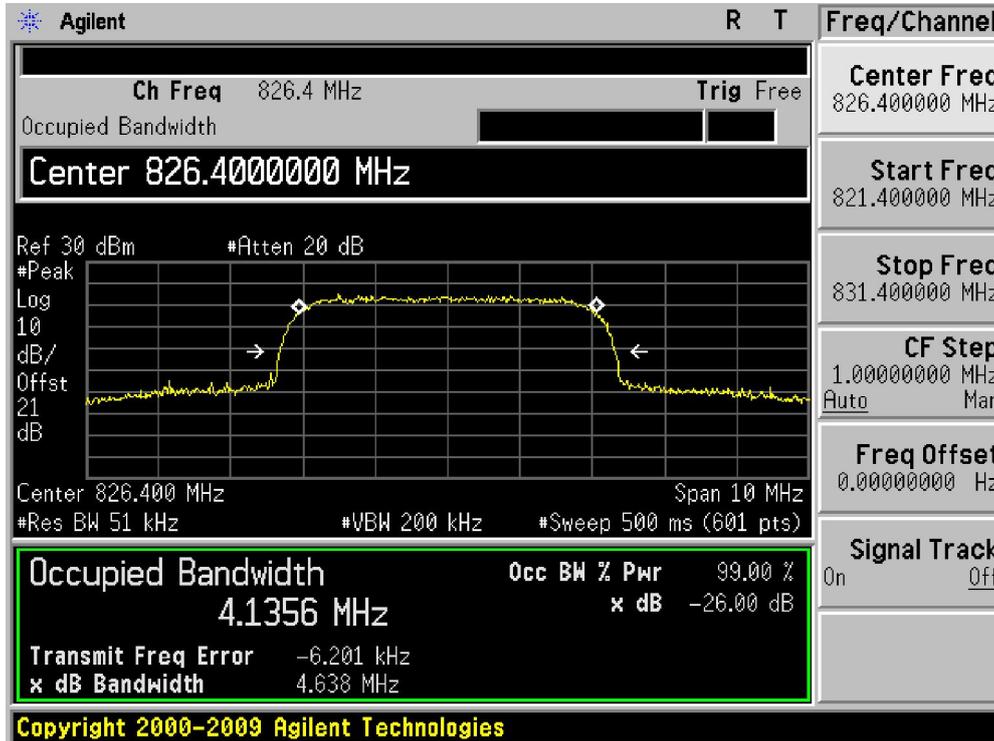


Figure Channel 4182 (836.40MHz)


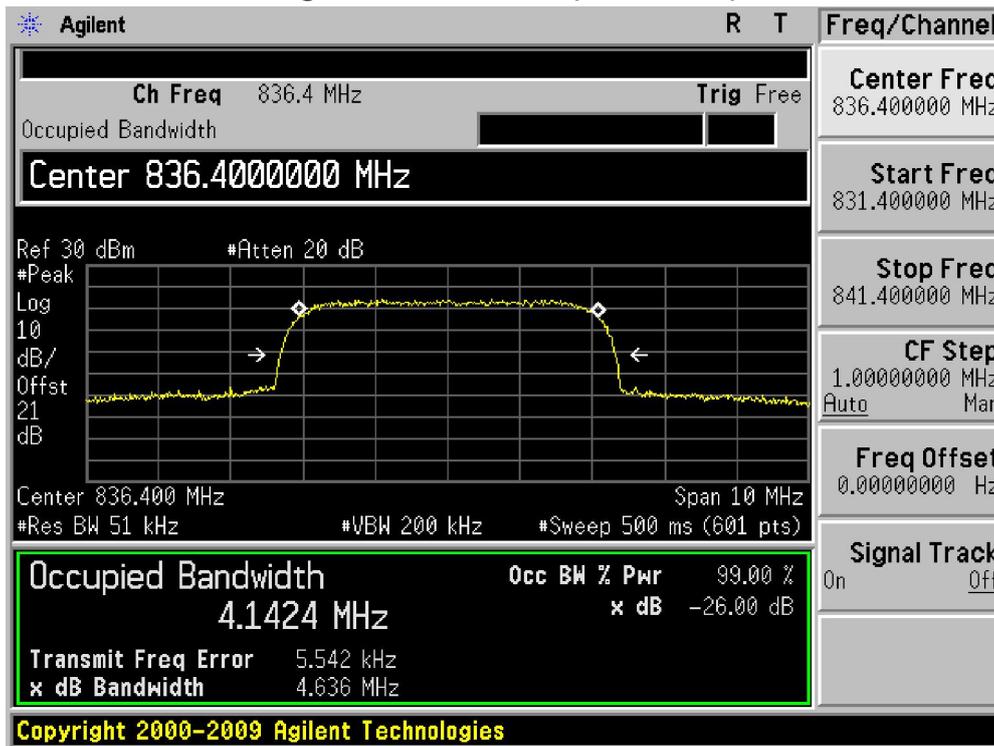


Figure Channel 4233 (846.60MHz)

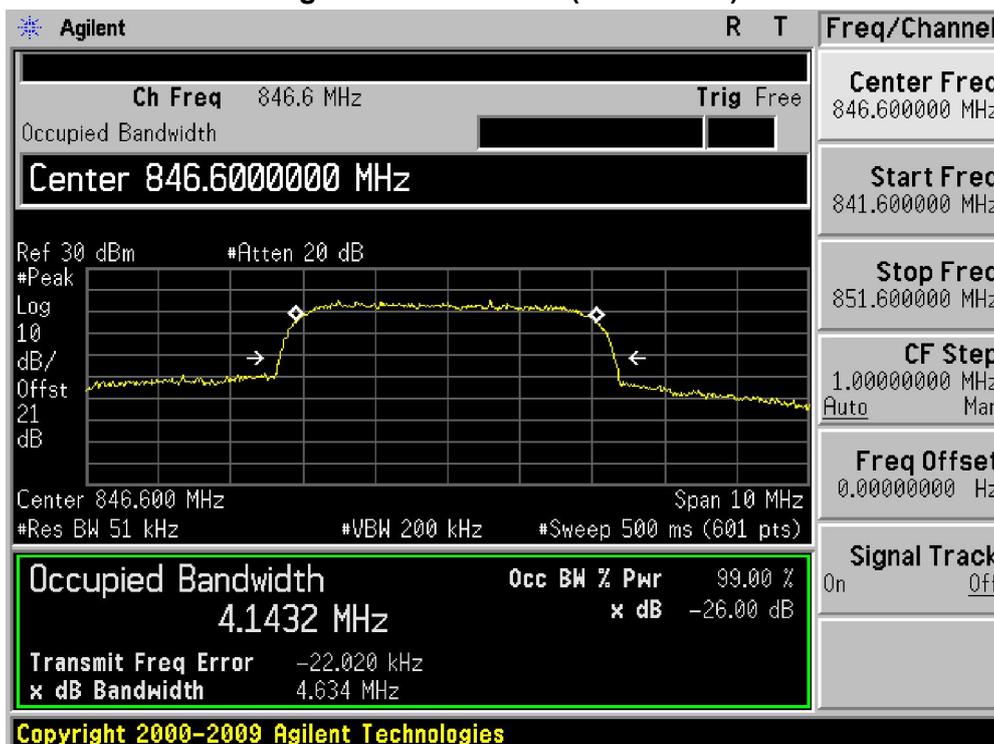

Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 9: HSPA Band II Link		
Date of Test	2013/04/01	Test Site	AC6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
9262	1852.4	4648.00	4157.70
9400	1880.0	4639.00	4154.80
9538	1907.6	4630.00	4162.10

Figure Channel 9262 (1852.40MHz)

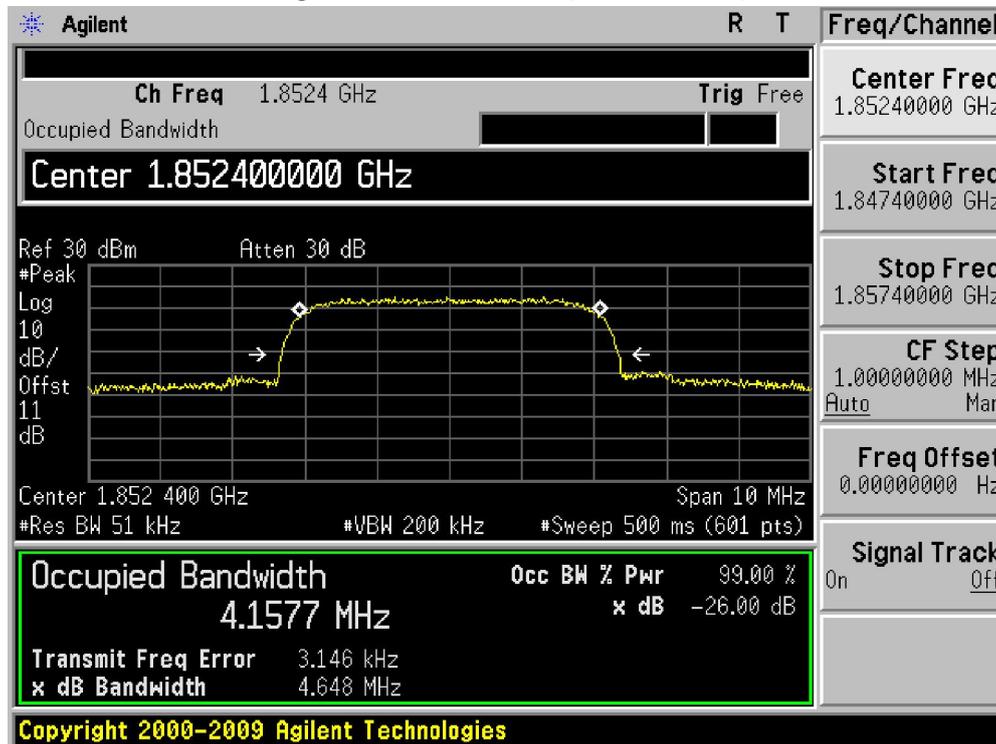


Figure Channel 9400 (1880.00MHz)

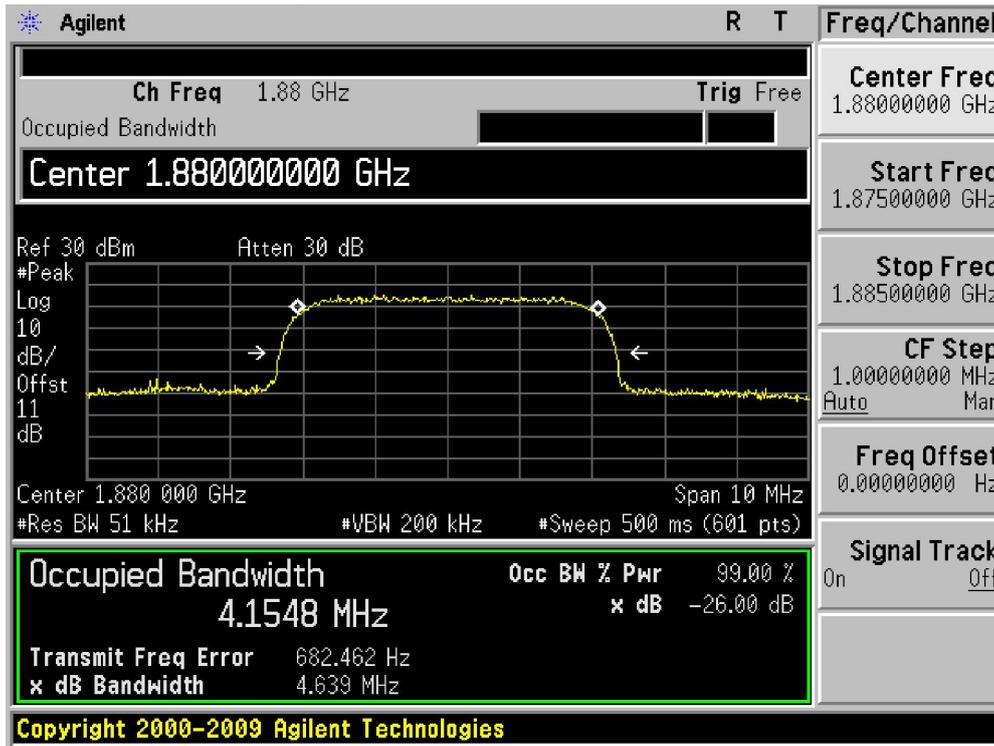


Figure Channel 9538 (1907.60MHz)



Product	WCDMA Digital Mobile Phone		
Test Item	Occupied Bandwidth		
Test Mode	Mode 10: HSUPA Band V Link		
Date of Test	2013/04/01	Test Site	AC6

Channel No.	Frequency (MHz)	-26dB Occupied Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
4132	826.4	4638.00	4137.40
4182	836.4	4624.00	4135.20
4233	846.6	4623.00	4134.50

Figure Channel 4132 (826.40MHz)

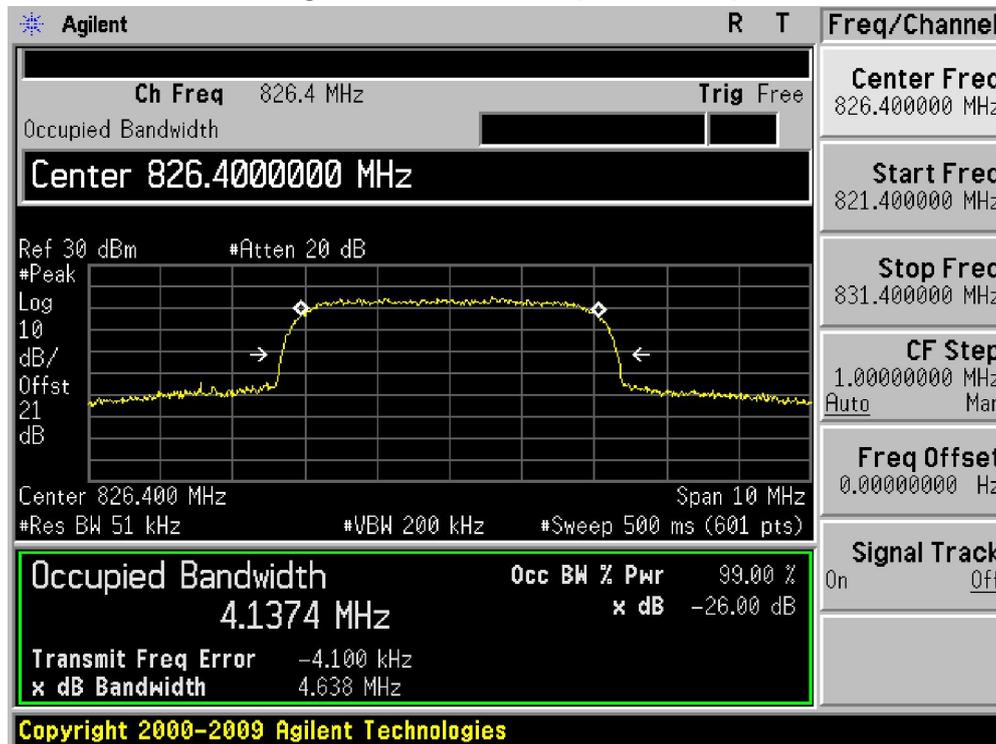


Figure Channel 4182 (836.40MHz)

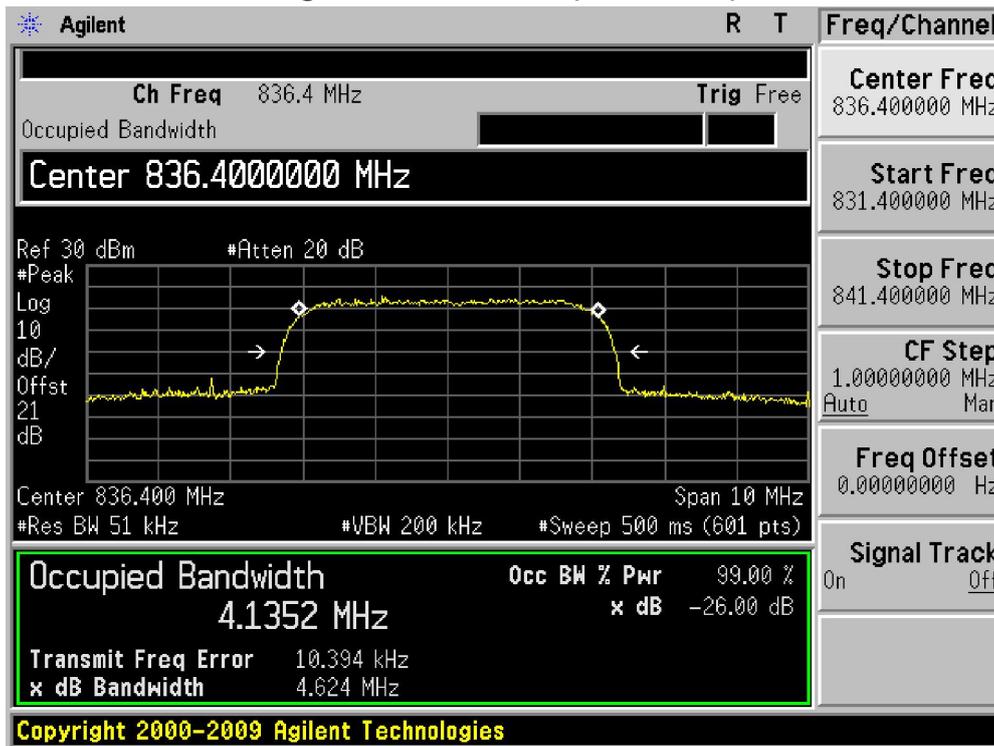


Figure Channel 4233 (846.60MHz)

