



FCC Part15.247 Test Report

Product Name : WCDMA Digital Mobile Phone
Model No. : HUAWEI G350-U151
FCC ID : QISG350-U151

Applicant : Huawei Technologies Co., Ltd.

Address : Administration Building, Headquarters of Huawei
Technologies Co., Ltd., Bantian, Longgang District,
Shenzhen, 518129, P.R.C

Date of Receipt : 12/03/2013
Test Date : 13/03/2013~06/04/2013
Issued Date : 21/04/2013
Report No. : 133S023R-RF-US-P06V01
Report Version : V 2.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, CNAS or any agency of the Government.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

Test Report Certification

Issued Date : 21/04/2013

Report No. : 132S023R-RF-US-P06V01



Product Name : WCDMA Digital Mobile Phone

Applicant : Huawei Technologies Co., Ltd.

Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Manufacturer : Huawei Technologies Co., Ltd.

Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

Model No. : HUAWEI G350-U151

FCC ID : QISG350-U151

EUT Voltage : DC: 3.7V

Trade Name : HUAWEI

Applicable Standard : FCC CFR Title 47 Part 15 Subpart C: 2012
ANSI C63.4: 2009
ANSI C63.10: 2009

Test Result : Complied

Performed Location : Suzhou EMC Laboratory
No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., Suzhou, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: 800392

Documented By : Alice Mi

Reviewed By : Sunny Sun

Approved By : Robin Wu

Laboratory Information

We, **Quietek Corporation**, are an independent EMC and safety consultancy that was established the whole facility in our laboratories. The test facility has been accredited/accepted(audited or listed) by the following related bodies in compliance with ISO 17025, EN 45001 and specified testing scope:

Taiwan R.O.C.	:	BSMI, NCC, TAF
Germany	:	TUV Rheinland
Norway	:	Nemko, DNV
USA	:	FCC, NVLAP
Japan	:	VCCI
China	:	CNAS

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site :<http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site :
<http://www.quietek.com/>

If you have any comments, Please don't hesitate to contact us. Our contact information is as below:

HsinChu Testing Laboratory :

No.75-2, 3rd Lin, Wangye Keng, Yongxing Tsuen, Qionglin Shiang, Hsinchu County 307, Taiwan, R.O.C.
TEL:+886-3-592-8858 / FAX:+886-3-592-8859 E-Mail : service@quietek.com

Linkou Testing Laboratory :

No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451, Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789 E-Mail : service@quietek.com

Suzhou Testing Laboratory :

No.99 Hongye Rd., Suzhou Industrial Park Loufeng Hi-Tech Development Zone., SuZhou, China
TEL : +86-512-6251-5088 / FAX : 86-512-6251-5098 E-Mail : service@quietek.com

TABLE OF CONTENTS

Description	Page
1. General Information.....	7
1.1. EUT Description	7
1.2. Mode of Operation.....	11
1.3. Tested System Details.....	12
1.4. Configuration of Tested System.....	13
1.5. EUT Exercise Software	14
2. Technical Test.....	15
2.1. Summary of Test Result	15
2.2. Test Environment.....	16
3. Conducted Emission	17
3.1. Test Equipment	17
3.2. Test Setup	17
3.3. Limit.....	18
3.4. Test Procedure	18
3.5. Uncertainty	18
3.6. Test Result	19
4. Radiated Emission	21
4.1. Test Equipment	21
4.2. Test Setup	22
4.3. Limit.....	23
4.4. Test Procedure	23
4.5. Uncertainty	24
4.6. Test Result	25
5. 20dB Bandwidth	28
5.1. Test Equipment	28
5.2. Test Setup	28
5.3. Limit.....	28
5.4. Test Procedure	29
5.5. Uncertainty	29
5.6. Test Result	30
6. Carrier Frequency Separation	36
6.1. Test Equipment	36
6.2. Test Setup	36
6.3. Limit.....	36
6.4. Test Procedure	37
6.5. Uncertainty	37
6.6. Test Result	38

7.	Number of Hopping Frequencies.....	44
7.1.	Test Equipment	44
7.2.	Test Setup	44
7.3.	Limit.....	44
7.4.	Test Procedure	45
7.5.	Uncertainty	45
7.6.	Test Result	46
8.	Time of Occupancy (Dwell Time).....	55
8.1.	Test Equipment	55
8.2.	Test Setup	55
8.3.	Limit.....	55
8.4.	Test Procedure	56
8.5.	Uncertainty	56
8.6.	Test Result	57
9.	Peak Output Power	63
9.1.	Test Equipment	63
9.2.	Test Setup	63
9.3.	Limit.....	63
9.4.	Test Procedure	64
9.5.	Uncertainty	64
9.6.	Test Result	65
10.	Band-edge Compliance of RF Conducted Emissions.....	71
10.1.	Test Equipment	71
10.2.	Test Setup	71
10.3.	Limit.....	71
10.4.	Test Procedure	72
10.5.	Uncertainty	72
10.6.	Test Result	73
11.	Spurious RF Conducted Emissions.....	77
11.1.	Test Equipment	77
11.2.	Test Setup	77
11.3.	Limit.....	77
11.4.	Test Procedure	78
11.5.	Uncertainty	78
11.6.	Test Result	79
12.	Radiated Emission Band Edge.....	85
12.1.	Test Equipment	85
12.2.	Test Setup	86

12.3. Limit.....86
12.4. Test Procedure86
12.5. Uncertainty87
12.6. Test Result88

1. General Information

1.1. EUT Description

Product Name	WCDMA Digital Mobile Phone
Model No.	HUAWEI G350-U151
Hardware Version	P2
Software Version for single card	G350-U151V100R001C00B118
Software Version for double card	G350-U351V100R001C00B123
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GPS	
Class of SRD	Class 3
2G	
Support Band	GSM850/PCS1900
GPRS Class	Class 12
Uplink	GSM 850: 824~849MHz PCS 1900: 1850~1910MHz
Downlink	GSM 850: 869~894MHz PCS 1900: 1930~1990MHz
Release Version	Rel-6
Type of modulation	GMSK for GSM/GPRS; 8PSK for EDGE
Antenna Gain	GSM 850: -2.50dBi PCS1900: 0.31dBi
3G	
Support Band	WCDMA Band II/WCDMA Band V
Uplink	WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz
Downlink	WCDMA Band II: 1930~1990MHz WCDMA Band V: 869~894MHz
Release Version	UMTS FDD: Rel-6
Type of modulation	QPSK
Antenna Gain	WCDMA Band II: 1.14dBi WCDMA Band V: -0.76dBi

Bluetooth	
Bluetooth Frequency	2402~2480MHz
Bluetooth Version	V2.1 + EDR
Type of modulation	FHSS
Data Rate	1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps (8DPSK)
Antenna Gain	0.41dBi
Wi-Fi	
Hotspots Function	YES
Wi-Fi Frequency	802.11b/g/n(20MHz): 2412 ~ 2462 MHz
Type of modulation	802.11b: DSSS; 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11 Mbps
	802.11g: 6/9/12/18/24/36/48/54 Mbps
	802.11n: up to 150 Mbps
Antenna Gain	-1.52dBi
Components	
Headset Model Number #1	HUAWEI/ 125G#+3261# 3.5MM-2
Headset Model Number #2	HUAWEI/ MEMD1532A761009
Battery #1	Brand Name: HUAWEI M/N: HB5V1HV Rated Voltage and Capacitance: 3.8V/1950mAh S/N: YAID130X16909379
Battery #2	Brand Name: HUAWEI M/N: HB5V1HV Rated Voltage and Capacitance: 3.8V/1950mAh S/N: YQCD104916910878
Battery #3	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: GAGD217L20001271
Battery #4	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: CABD110L20002578
Battery #5	Brand Name: HUAWEI M/N: HB5V1 Rated Voltage and Capacitance: 3.7V/1730mAh S/N: BAACB22L24638179

Adapter #1	Brand Name: HUAWEI M/N: HW-050100U1W Input: 100-240V~50/60Hz 0.2A MAX Output: 5Vdc, 1.0A S/N: HKAD10400753
Adapter #2	Brand Name: HUAWEI M/N: HW-050100U1W Input: 100-240V~50/60Hz 0.2A MAX Output: 5Vdc, 1.0A S/N: TPACC0860553

Bluetooth Working Frequency of Each Channel:							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

1.2. Mode of Operation

Quietek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmitter-1Mbps(GFSK_DH5)
Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)
Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For portable device, radiated spurious emission was verified over X, Y, Z axis, and shown the worst case on this report.
3. This device is a composite device in accordance with Part 15 Subpart B regulations. The report number is 133293R-ITUSP01V02.

1.3. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Bluetooth Tester	Anritsu	MT8852B	SUA0500090	Non-Shielded, 1.8m

1.4. Configuration of Tested System

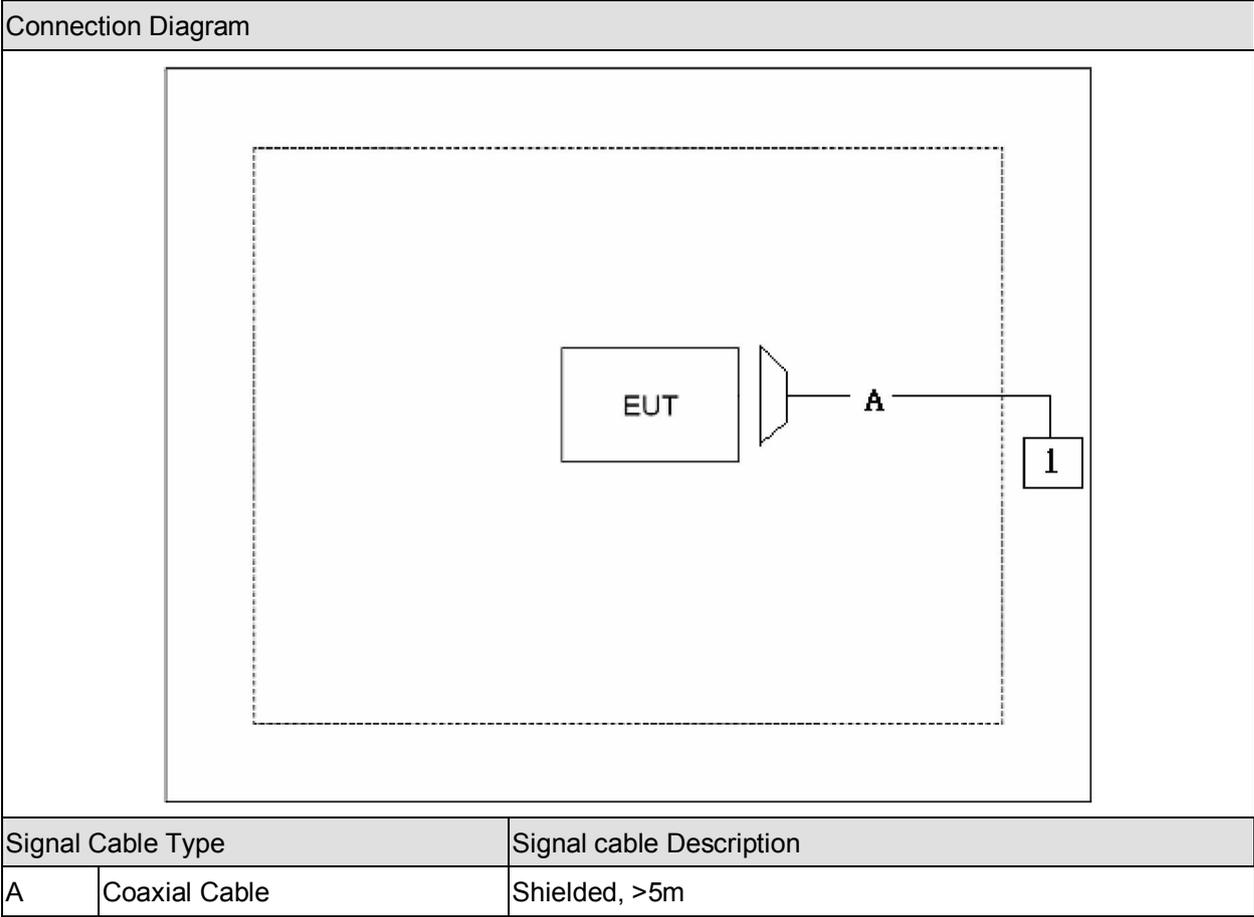

1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of equipment.
3	EUT communicate with Bluetooth Tester, then select test mode and channel to test

2. Technical Test

2.1. Summary of Test Result

No deviations from the test standards

Deviations from the test standards as below description:

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2012 Section 15.207	Yes	No
Radiated Emission	FCC CFR Title 47 Part 15 Subpart C: 2012 Section 15.209	Yes	No
20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2012 Section 15.247(a)(1)	Yes	No
Carrier Frequency Separation	FCC CFR Title 47 Part 15 Subpart C: 2012 Section 15.247(a)(1)	Yes	No
Number of Hopping Frequencies	FCC CFR Title 47 Part 15 Subpart C: 2012 Section 15.247(a)(1)(iii)	Yes	No
Time of Occupancy (Dwell Time)	FCC CFR Title 47 Part 15 Subpart C: 2012 Section 15.247(a)(1)(iii)	Yes	No
Peak Output Power	FCC CFR Title 47 Part 15 Subpart C: 2012 Section 15.247(b)(1)	Yes	No
Band-edge Compliance of RF Conducted Emissions	FCC CFR Title 47 Part 15 Subpart C: 2012 Section 15.215(c), 15.247(d)	Yes	No
Spurious RF Conducted Emissions	FCC CFR Title 47 Part 15 Subpart C: 2012 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2012 15.247(d)	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

3. Conducted Emission


3.1. Test Equipment

Conducted Emission / TR-1

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100726	2014.03.30
Two-Line V-Network	R&S	ENV216	100043	2014.03.30
Two-Line V-Network	R&S	ENV216	100044	2013.09.17
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2014.03.01
50ohm Termination	SHX	TF2	07081401	2013.09.17
Temperature/Humidity Meter	zhicheng	ZC1-2	TR1-TH	2014.01.10

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

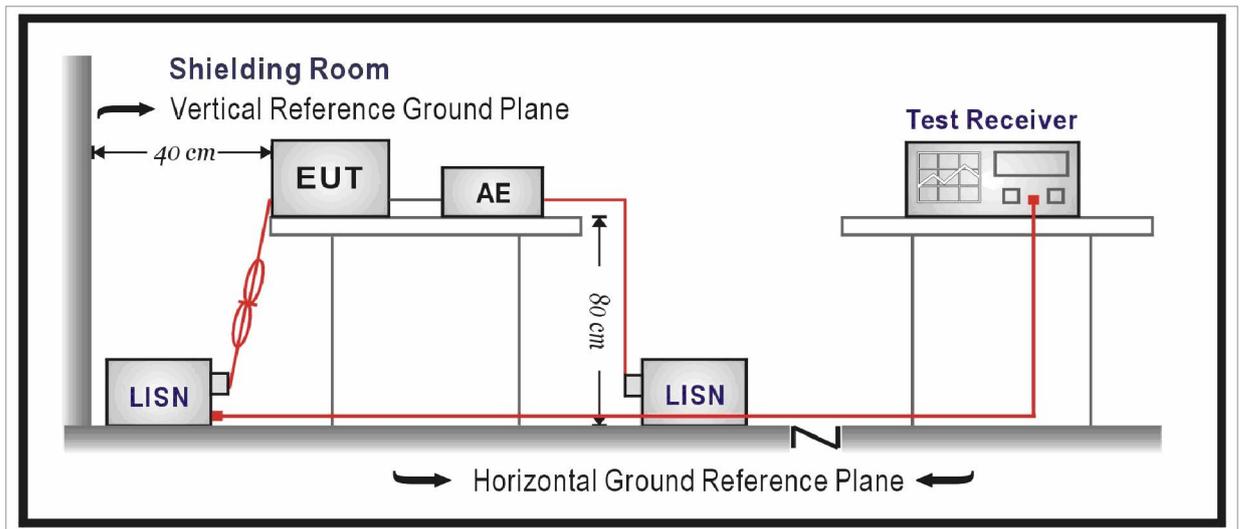

3.3. Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure

According to FCC ANSI C63.4: 2009 & ANSI C63.10: 2009.

The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB


3.6. Test Result

Engineer: Jack	
Site: TR5	Time: 2013/03/19 - 19:17
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Line
EUT: WCDMA Digital Mobile Phone	Power: AC 120V/60Hz
Note: Mode 1	

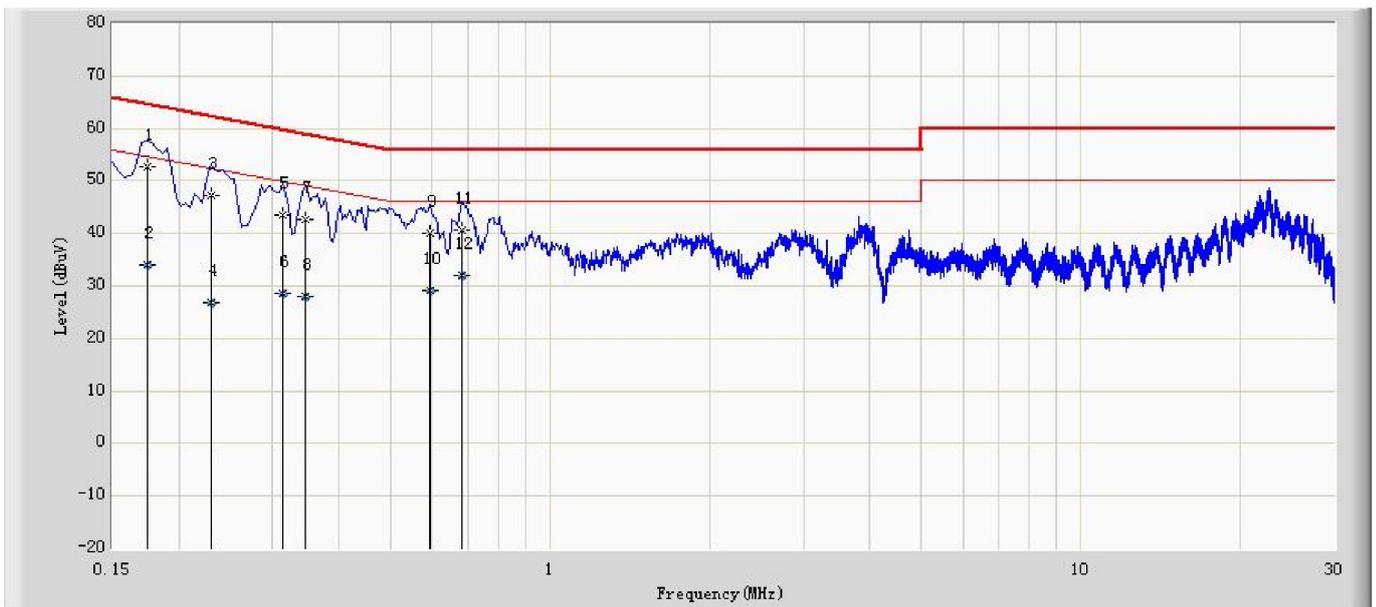

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.174	52.666	42.841	-12.102	64.767	9.825	QP
2		0.174	34.039	24.214	-20.729	54.767	9.825	AV
3		0.230	47.109	37.294	-15.341	62.450	9.814	QP
4		0.230	26.739	16.925	-25.711	52.450	9.814	AV
5		0.314	43.470	33.637	-16.394	59.864	9.832	QP
6		0.314	28.490	18.657	-21.374	49.864	9.832	AV
7		0.346	42.629	32.783	-16.429	59.058	9.846	QP
8		0.346	28.083	18.237	-20.975	49.058	9.846	AV
9		0.594	40.033	30.177	-15.967	56.000	9.857	QP
10		0.594	29.067	19.210	-16.933	46.000	9.857	AV
11		0.682	40.775	30.951	-15.225	56.000	9.824	QP
12		0.682	31.955	22.131	-14.045	46.000	9.824	AV

Engineer: Jack	
Site: TR5	Time: 2013/03/19 - 19:13
Limit: FCC_Part15.207_CE_AC Power_ClassB	Margin: 0
Probe: ENV216_101044(0.009-30MHz)	Polarity: Neutral
EUT: WCDMA Digital Mobile Phone	Power: AC 120V/60Hz
Note: Mode 1	

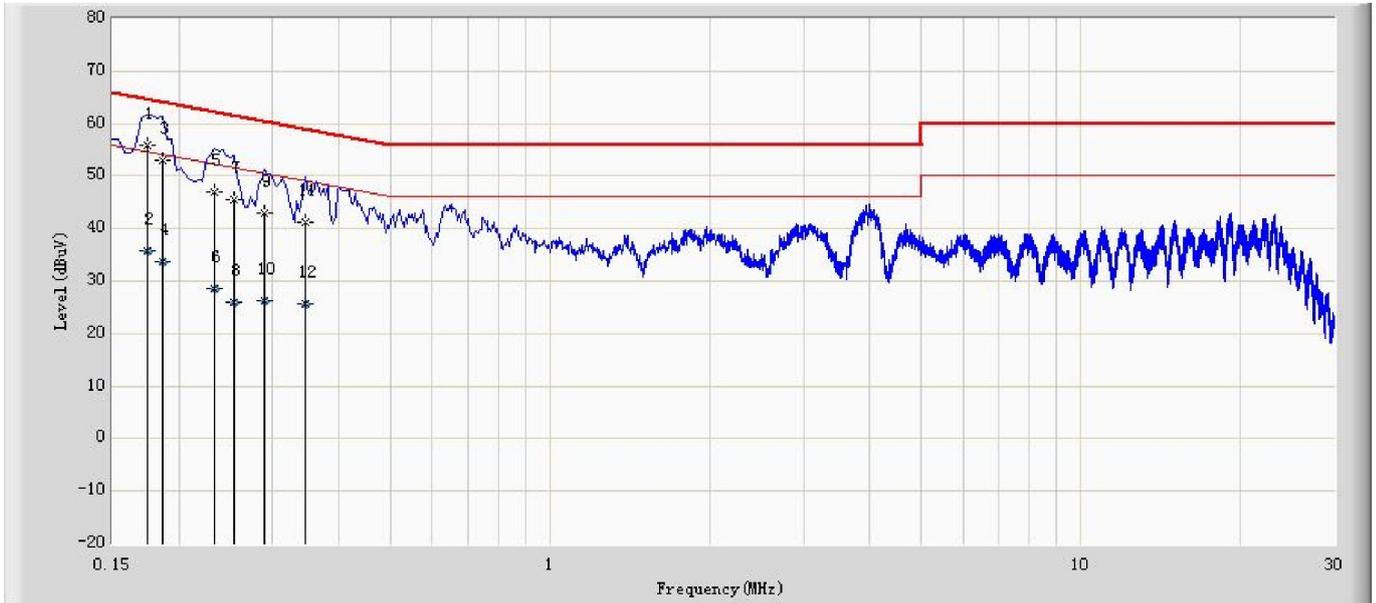

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1	*	0.174	55.932	46.108	-8.835	64.767	9.825	QP
2		0.174	35.674	25.849	-19.093	54.767	9.825	AV
3		0.186	53.096	43.276	-11.117	64.213	9.820	QP
4		0.186	33.869	24.049	-20.344	54.213	9.820	AV
5		0.234	46.965	37.150	-15.341	62.307	9.815	QP
6		0.234	28.651	18.836	-23.656	52.307	9.815	AV
7		0.254	45.469	35.636	-16.156	61.625	9.834	QP
8		0.254	25.957	16.124	-25.668	51.625	9.834	AV
9		0.290	42.893	33.058	-17.631	60.524	9.835	QP
10		0.290	26.206	16.371	-24.318	50.524	9.835	AV
11		0.346	41.081	31.235	-17.977	59.058	9.846	QP
12		0.346	25.828	15.982	-23.230	49.058	9.846	AV

4. Radiated Emission

4.1. Test Equipment

Radiated Emission / AC-2


Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2014.04.30
Loop Antenna	R&S	HFH2-Z2	833799/003	2013.11.17
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2013.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2014.03.01
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC2-TH	2013.05.07

Radiated Emission / AC-5


Instrument	Manufacturer	Type No.	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2014.03.30
Preamplifier	Miteq	NSP1800-25	1364185	2013.05.04
Preamplifier	QuieTek	AP-040G	CHM-0906001	2013.05.04
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2013.10.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2014.06.08
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2013.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2014.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2014.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2014.03.01
Temperature/Humidity Meter	Zhicheng	ZC1-2	AC5-TH	2014.01.11

4.2. Test Setup


Below 30MHz Test Setup:

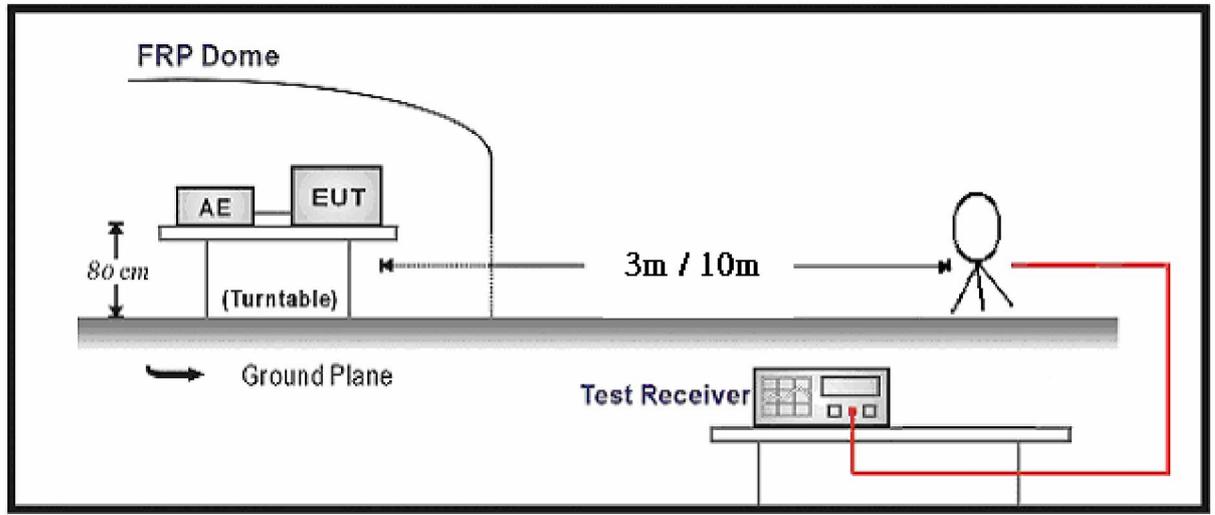

Below 1GHz Test Setup:

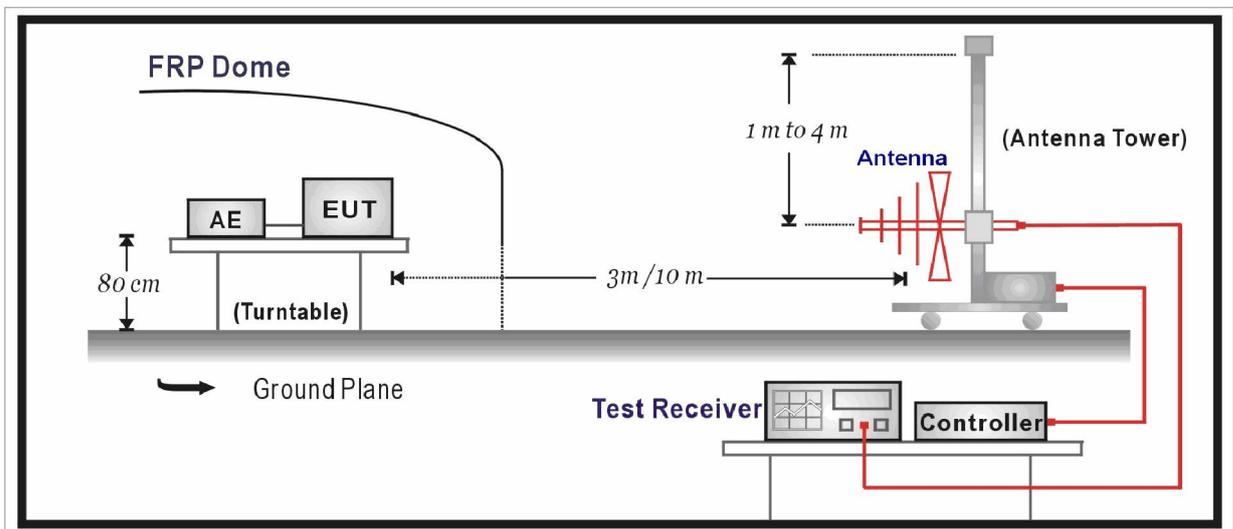

Above 1GHz Test Setup:

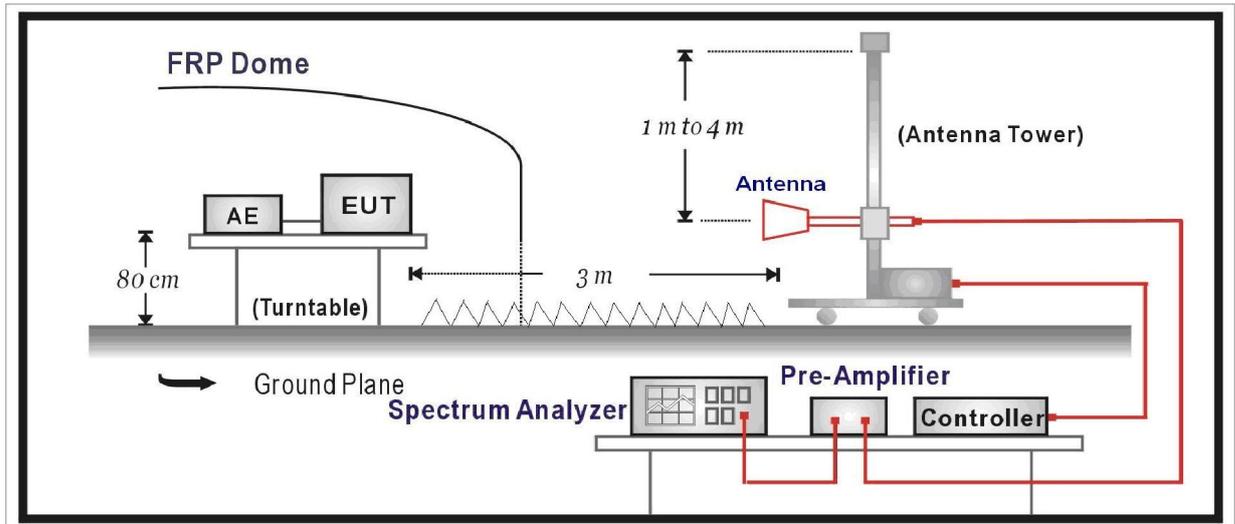

4.3. Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (dBuV/m)
30 - 88	3	40
88 - 216	3	43.5
216 - 960	3	46
Above 960	3	54

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

According to ANSI C63.10: 2009.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the

maximum emission, all of the interface cables were manipulated according to ANSI C63.4: 2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn antenna will be bended down a little (as horn antenna has the narrow beamwidth) in order to keeping the antenna in the "cone of radiation" of EUT. The 3dB beamwidth is 60~10 degrees for H-plane and 90~10 degrees for E-plane.

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB

4.6. Test Result

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;

Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Measure Level = Reading Level + Cable Loss + Antenna Factor – Preampifier Gain

Mode 1: Transmitter-1Mbps(GFSK_DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	2402.0	51.7	28.2	79.8	Fundamental	/	PK
	H	680.7	0.6	19.4	20.0	46	-26.0	QP
	H	787.5	1.0	20.7	21.7	46	-24.3	QP
	H	3122.5	43.6	-0.2	43.4	54(Note2)	-10.6	PK
	H	4804.0	42.3	2.6	44.9	54(Note2)	-9.1	PK
	H	7206.0	41.3	8.9	50.2	54(Note2)	-3.8	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK
39	H	2441.1	51.5	31.5	83.4	Fundamental	/	PK
	H	681.2	0.1	19.4	19.5	46	-26.5	QP
	H	754.5	1.3	20.4	21.7	46	-24.3	QP
	H	3122.5	43.3	-0.2	43.1	54(Note2)	-10.9	PK
	H	4882.0	41.7	2.8	44.5	54(Note2)	-9.5	PK
	H	7323.0	40.4	8.9	49.3	54(Note2)	-4.7	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK
78	H	2480.0	51.4	28.5	87.9	Fundamental	/	PK
	H	653.1	0.2	19.5	19.7	46	-26.3	QP
	H	723.4	0.4	19.8	20.2	46	-25.8	QP
	H	3122.5	43.3	-0.2	43.1	54(Note2)	-10.9	PK
	H	4946.0	45.0	3.1	48.1	54(Note2)	-5.9	PK
	H	7440.0	41.4	8.8	50.2	54(Note2)	-3.8	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK

Note 1: The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	2402.1	53.1	28.1	81.2	Fundamental	/	PK
	H	612.3	0.1	19.5	19.6	46	-26.4	QP
	H	686.0	0.4	19.4	19.8	46	-26.2	QP
	H	3122.5	43.5	-0.2	43.3	54(Note2)	-10.7	PK
	H	4804.0	42.2	2.6	44.8	54(Note2)	-9.2	PK
	H	7206.0	40.1	8.9	49.0	54(Note2)	-5.0	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK
39	H	2441.3	53.5	29.9	83.4	Fundamental	/	PK
	H	574.9	-0.2	19.6	19.4	46	-26.6	QP
	H	667.6	1.4	19.4	20.8	46	-25.2	QP
	H	3122.5	43.4	-0.2	43.2	54(Note2)	-10.8	PK
	H	4882.0	41.4	2.8	44.2	54(Note2)	-9.8	PK
	H	7323.0	40.3	8.9	49.2	54(Note2)	-4.8	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK
78	H	2480.0	56.6	28.5	85.1	Fundamental	/	PK
	H	652.6	2.1	19.5	21.6	46	-24.4	QP
	H	744.3	0.7	20.2	20.9	46	-25.1	QP
	H	3122.5	43.4	-0.2	43.2	54(Note2)	-10.8	PK
	H	4960.0	40.8	3.2	44.0	54(Note2)	-10.0	PK
	H	7440.0	40.7	8.8	49.5	54(Note2)	-4.5	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK

Note 1: The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

Mode 3: Transmitter-3Mbps(8DPSK_DH5)

CH	Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
0	H	2402.0	53.1	28.2	81.3	Fundamental	/	PK
	H	601.1	2.2	19.5	21.7	46	-24.3	QP
	H	655.5	0.5	19.5	20.0	46	-26.0	QP
	H	3122.5	43.4	-0.2	43.2	54(Note2)	-10.8	PK
	H	4804.0	41.7	2.6	44.3	54(Note2)	-9.7	PK
	H	7206.0	40.1	8.9	49.0	54(Note2)	-5.0	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK
39	H	2441.1	53.2	30.1	83.3	Fundamental	/	PK
	H	652.6	1.6	19.5	21.1	46	-24.9	QP
	H	730.2	0.1	19.9	20.1	46	-25.9	QP
	H	3122.5	43.1	-0.2	42.9	54(Note2)	-11.1	PK
	H	4882.0	41.9	2.8	44.7	54(Note2)	-9.3	PK
	H	7323.0	40.6	8.9	49.4	54(Note2)	-4.6	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK
78	H	2480.0	56.9	28.5	85.4	Fundamental	/	PK
	H	677.3	1.2	19.4	20.6	46	-25.4	QP
	H	766.1	1.2	20.5	21.7	46	-24.3	QP
	H	3122.5	43.2	-0.2	43.0	54(Note2)	-11.0	PK
	H	4960.0	41.0	3.2	44.2	54(Note2)	-9.8	PK
	H	7440.0	40.5	8.8	49.3	54(Note2)	-4.7	PK
	H	24000.0	31.4	18.8	50.2	54(Note2)	-3.8	PK

Note 1: The test trace is same as the ambient noise (the test frequency range: 9kHz~30MHz, 18GHz~25GHz), therefore no data appear in the report.

2: This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.

5. 20dB Bandwidth


5.1 Test Equipment

20dB Bandwidth / TR8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2013.05.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2 Test Setup

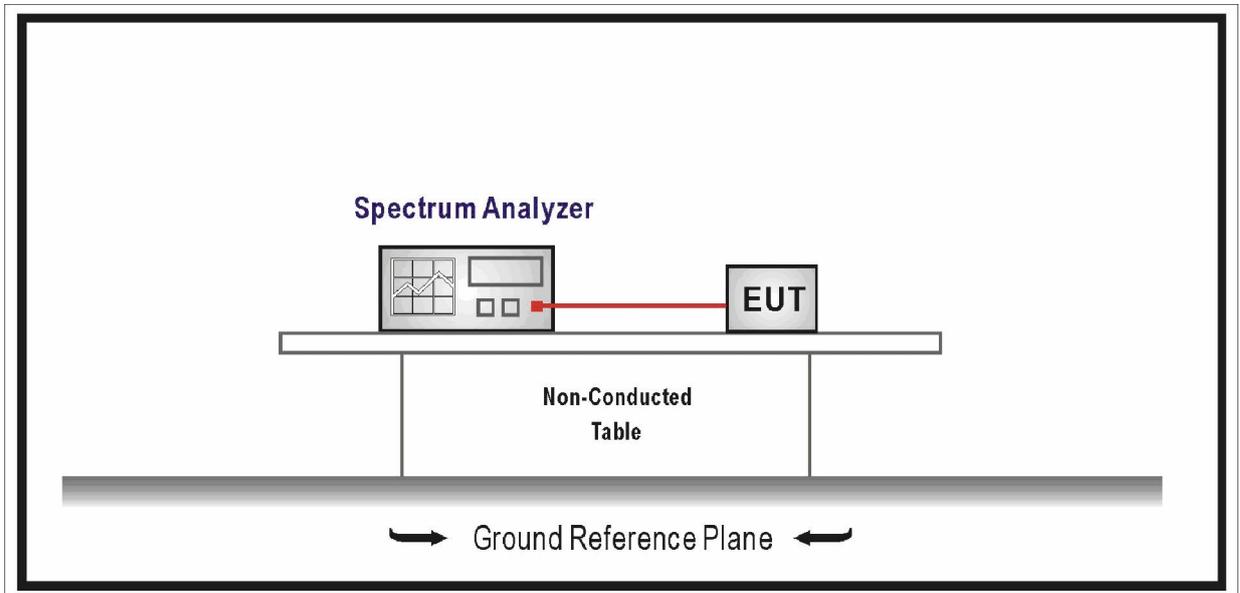

5.3 Limit

- For frequency hopping systems operating in 2400-2483.5 MHz band, no limitation.
- For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

5.4 Test Procedure

According to ANSI C63.10: 2009.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW \cong 1% of the 20dB bandwidth

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize.

Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

5.5 Uncertainty


The measurement uncertainty is defined as ± 1 kHz

5.6 Test Result

Product	:	WCDMA Digital Mobile Phone
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	949.1	869.1
39	2441	951.2	868.8
78	2480	927.4	868.1


Channel 00 (2402MHz)

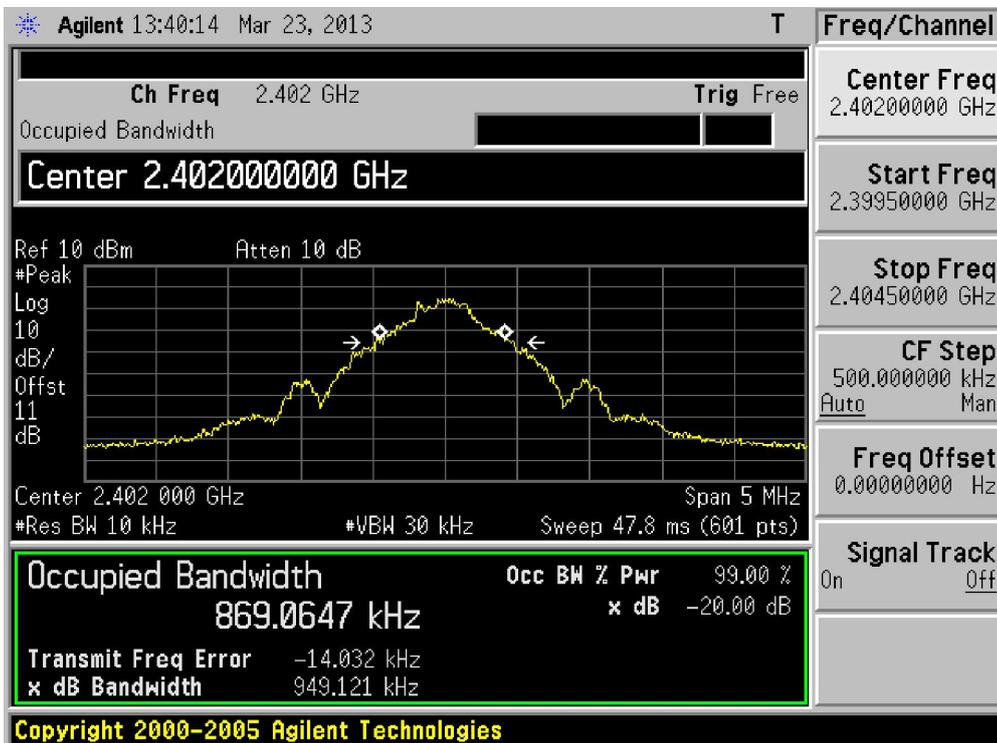

Channel 39 (2441MHz)




Channel 78 (2480MHz)

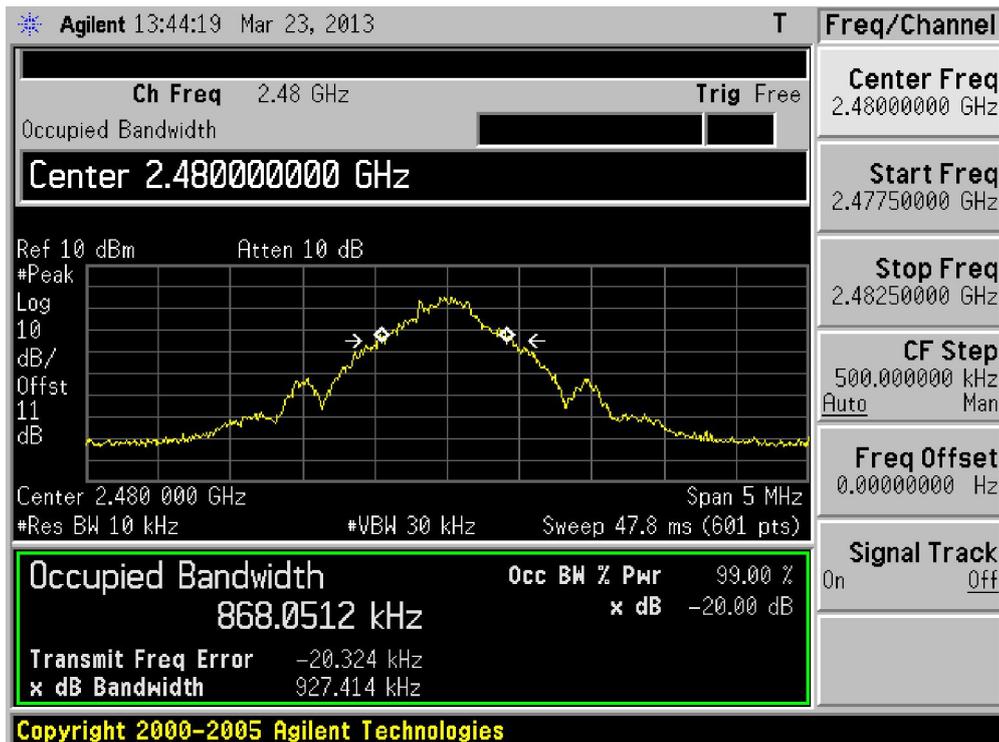


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1287.0	1177.5
39	2441	1318.0	1196.7
78	2480	1261.0	1182.4


Channel 00 (2402MHz)

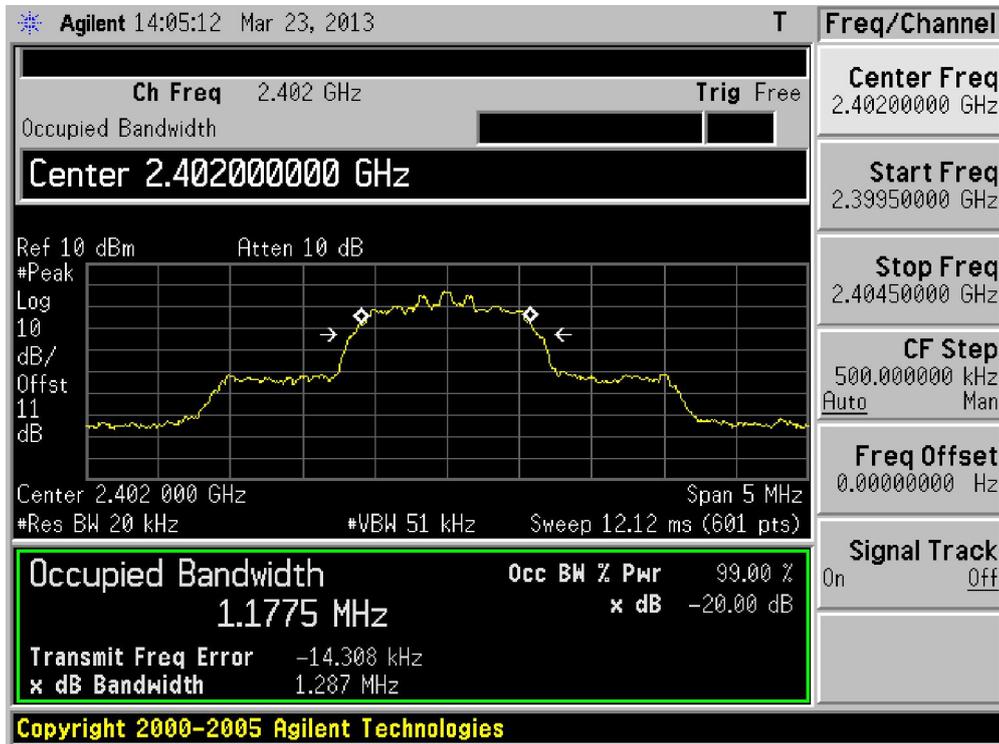

Channel 39 (2441MHz)

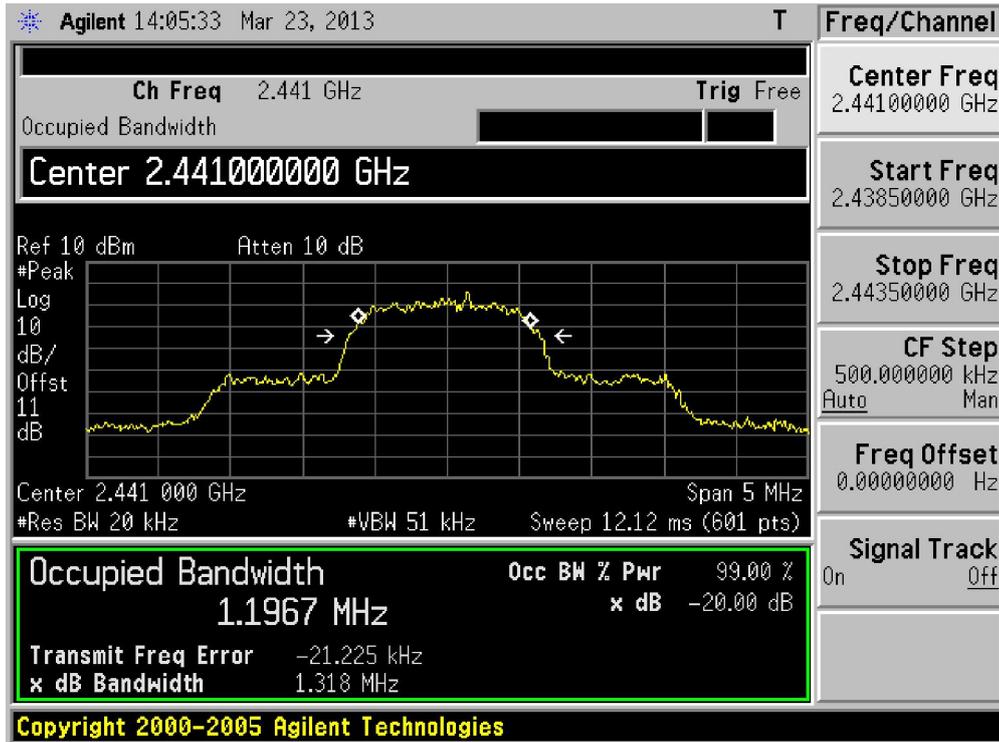


Channel 78 (2480MHz)

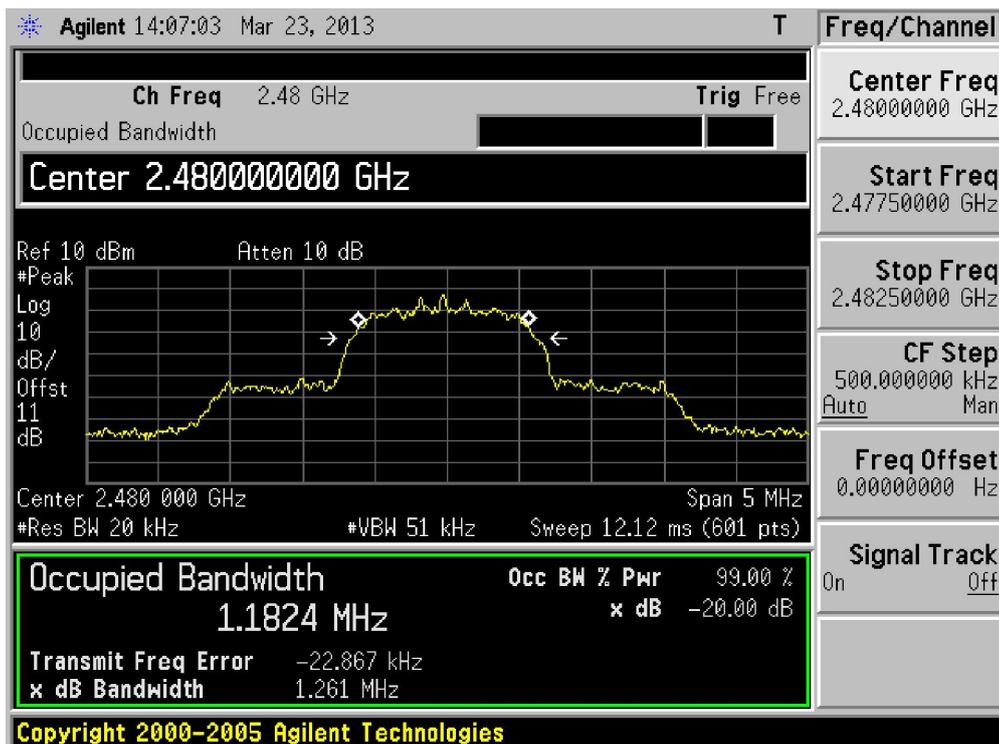


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Occupied Bandwidth
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	1292.0	1193.9
39	2441	1267.0	1188.6
78	2480	1296.0	1202.7


Channel 00 (2402MHz)

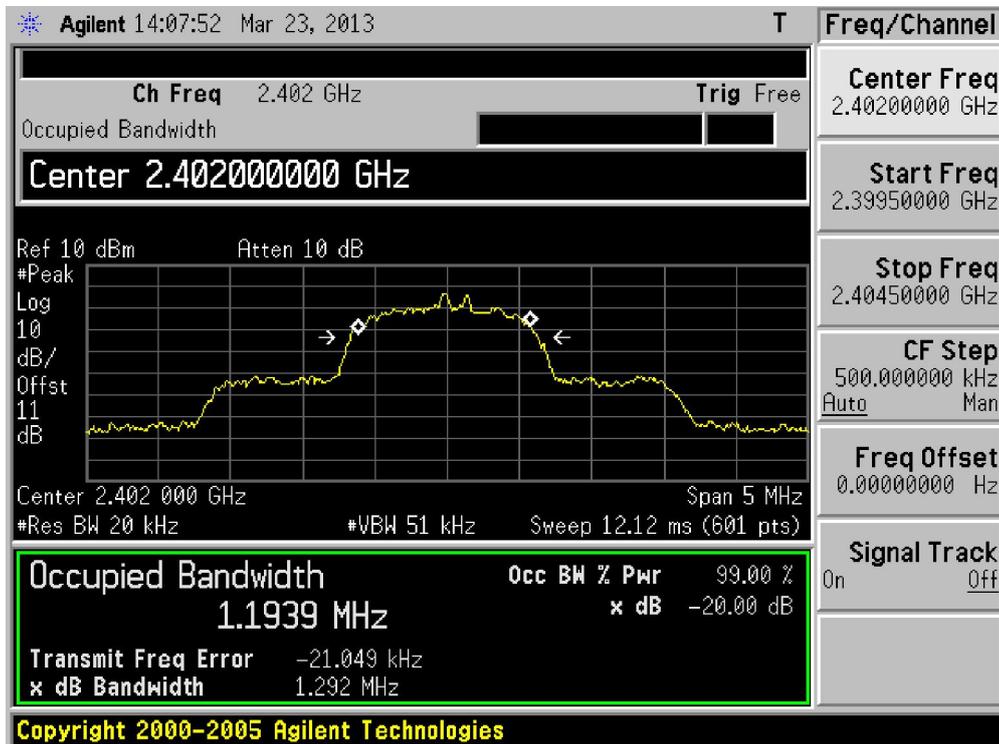

Channel 39 (2441MHz)

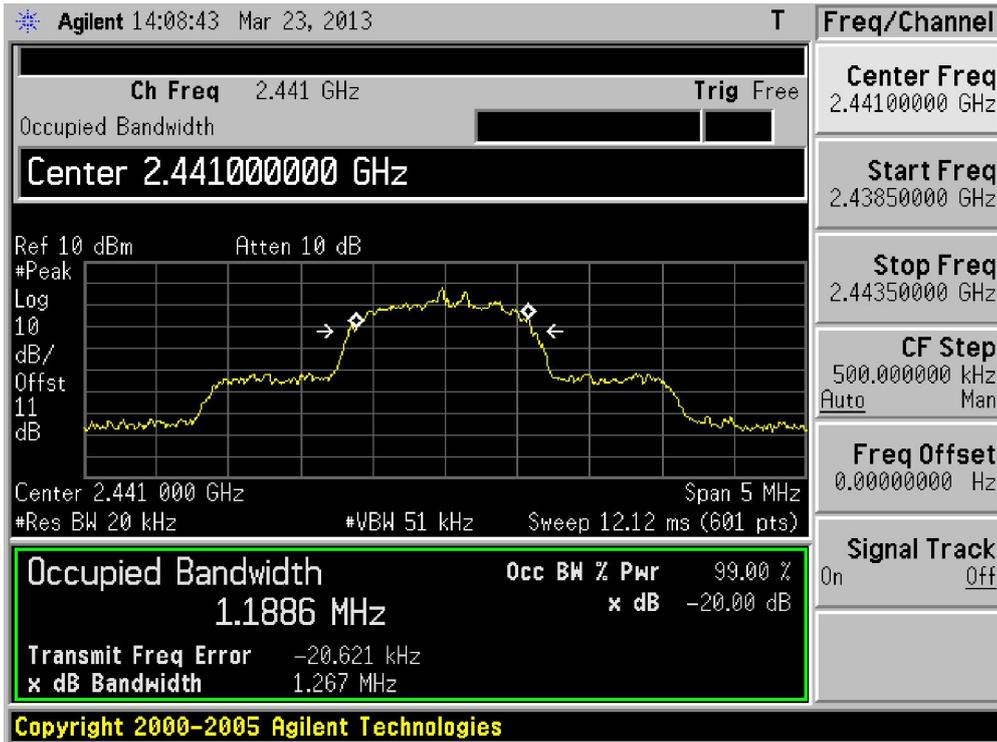

Channel 78 (2480MHz)

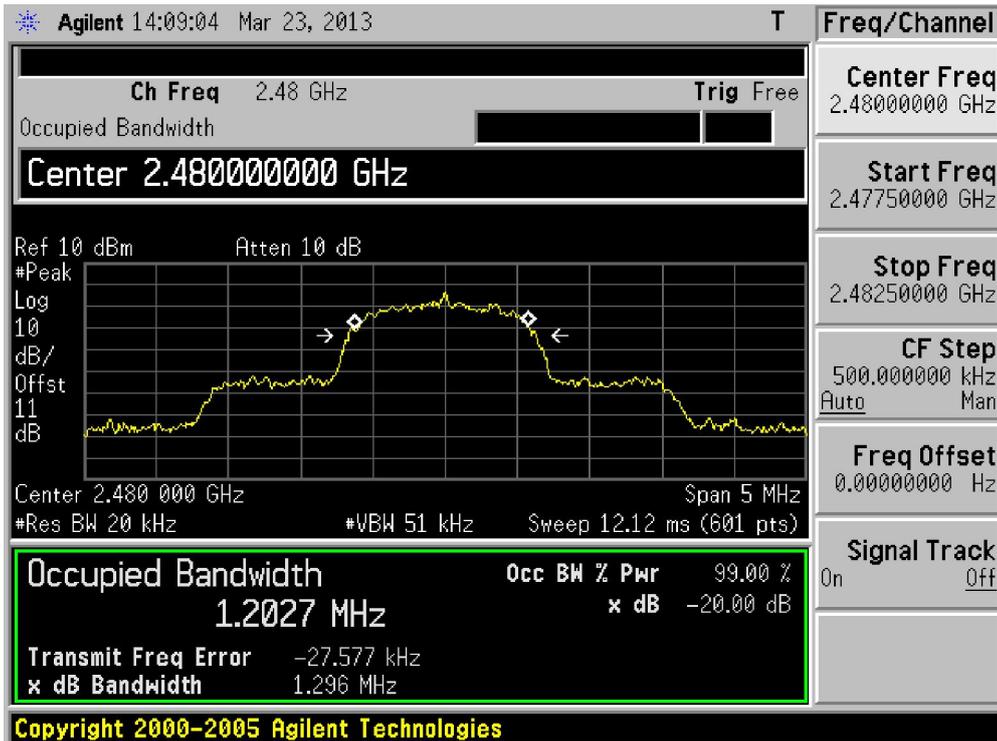

6. Carrier Frequency Separation


6.1. Test Equipment

Carrier Frequency Separation / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2013.05.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

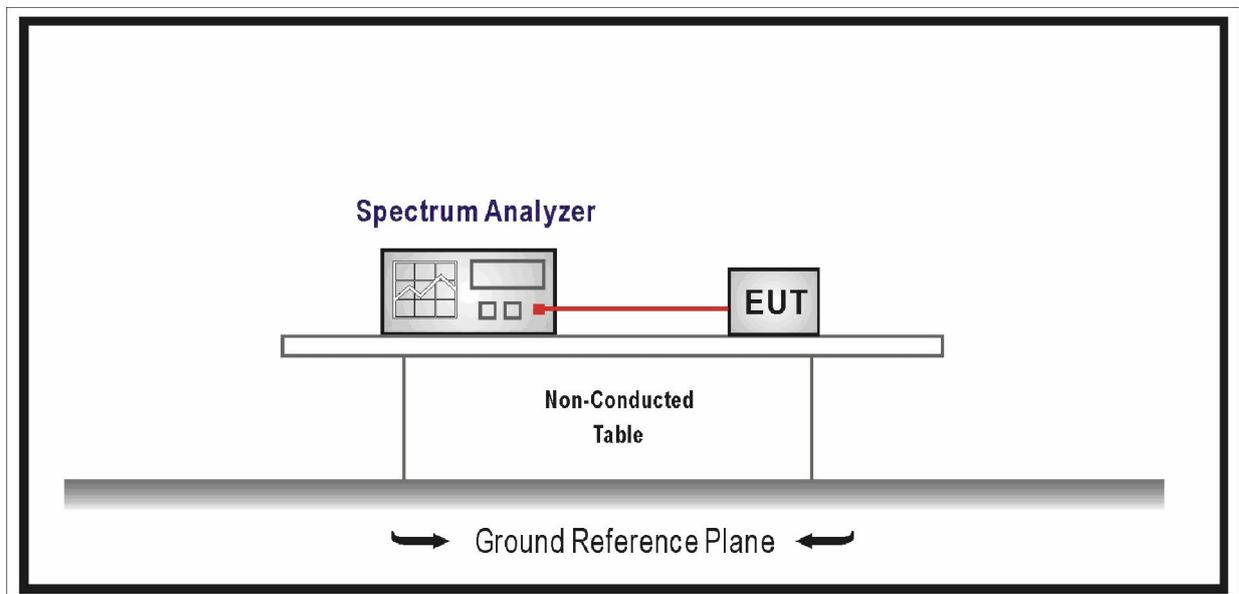

6.3. Limit

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping

channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

6.4. Test Procedure

According to ANSI C63.10: 2009.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \cong 1% of the span

Video (or Average) Bandwidth VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

6.5. Uncertainty


The measurement uncertainty is defined as \pm 1 kHz

6.6. Test Result


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass


Channel 00 (2402MHz)

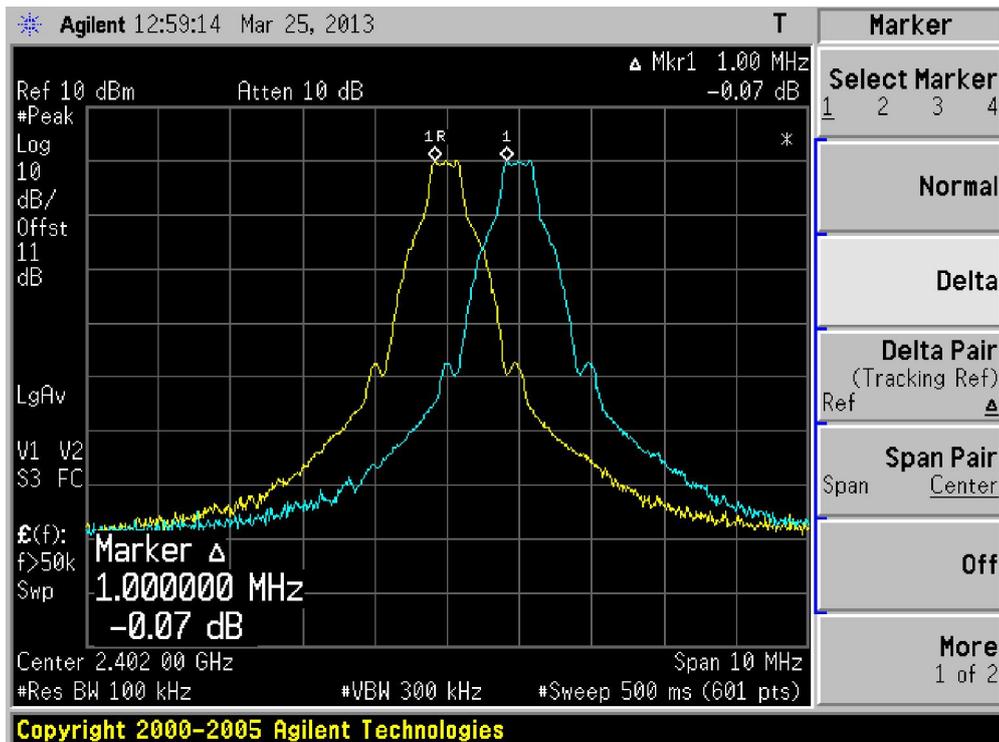

Channel 39 (2441MHz)

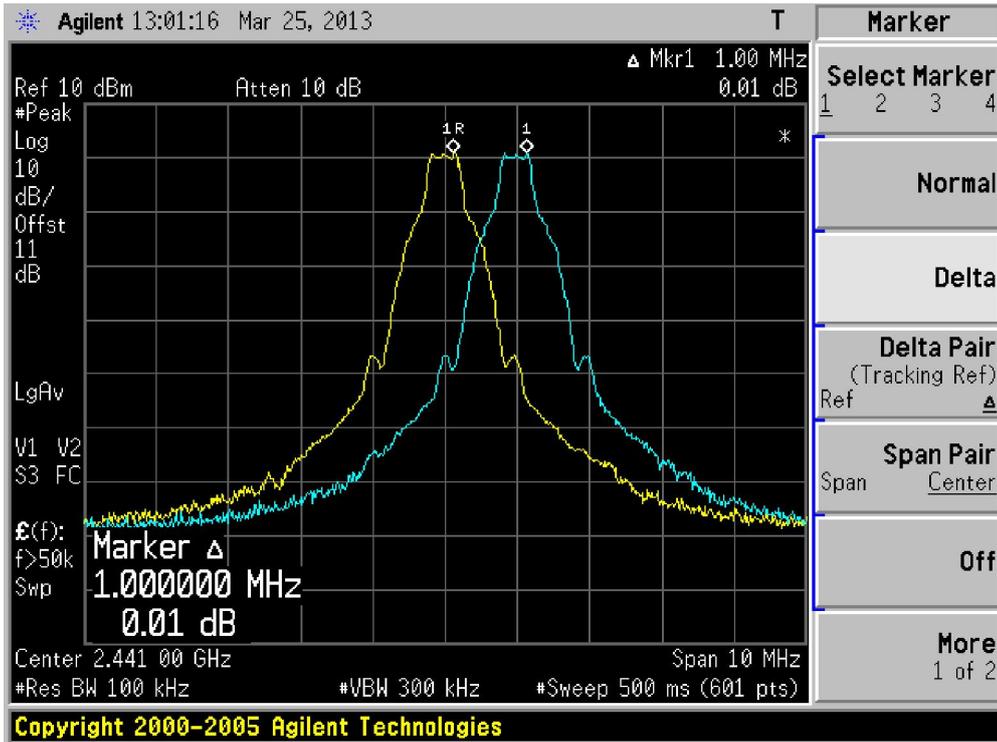


Channel 78 (2480MHz)

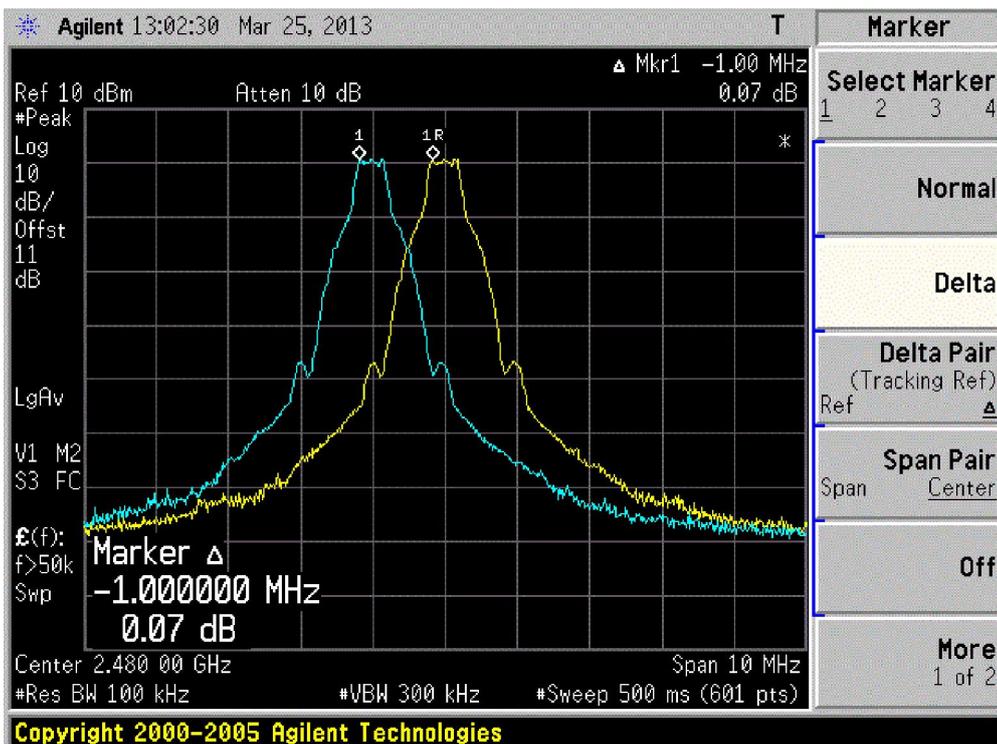


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass


Channel 00 (2402MHz)

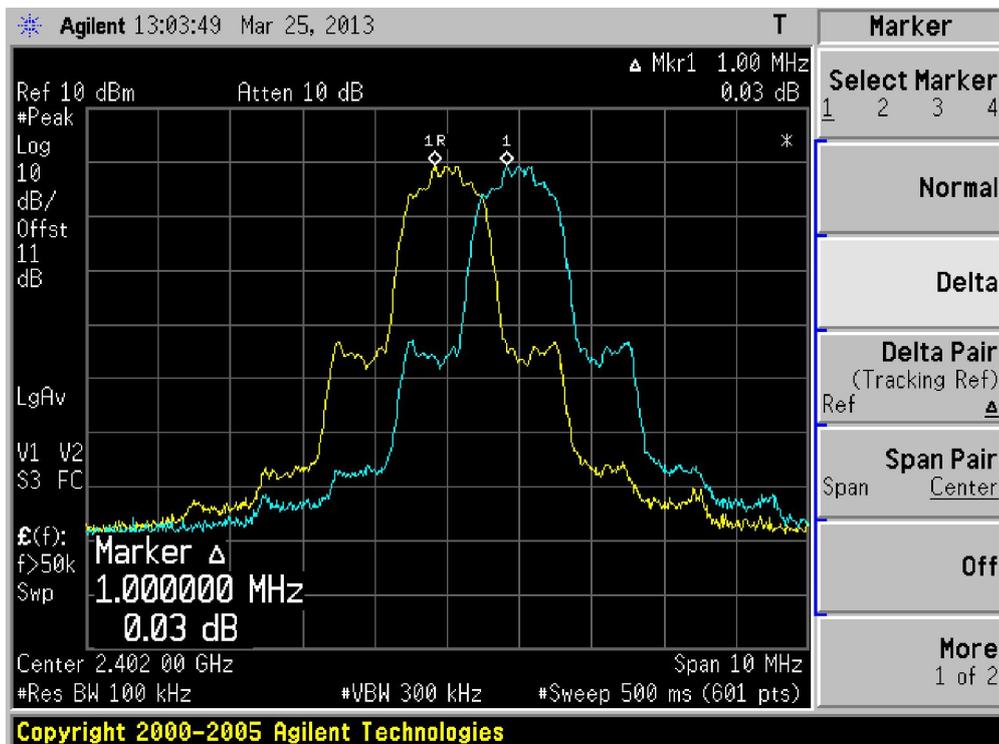

Channel 39 (2441MHz)

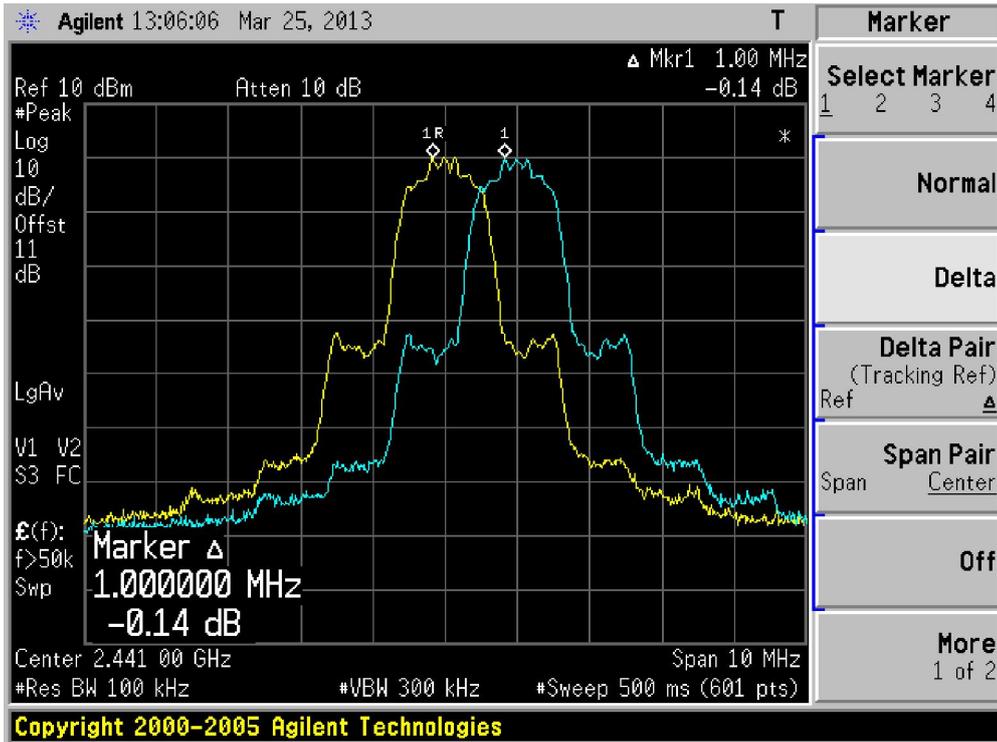


Channel 78 (2480MHz)

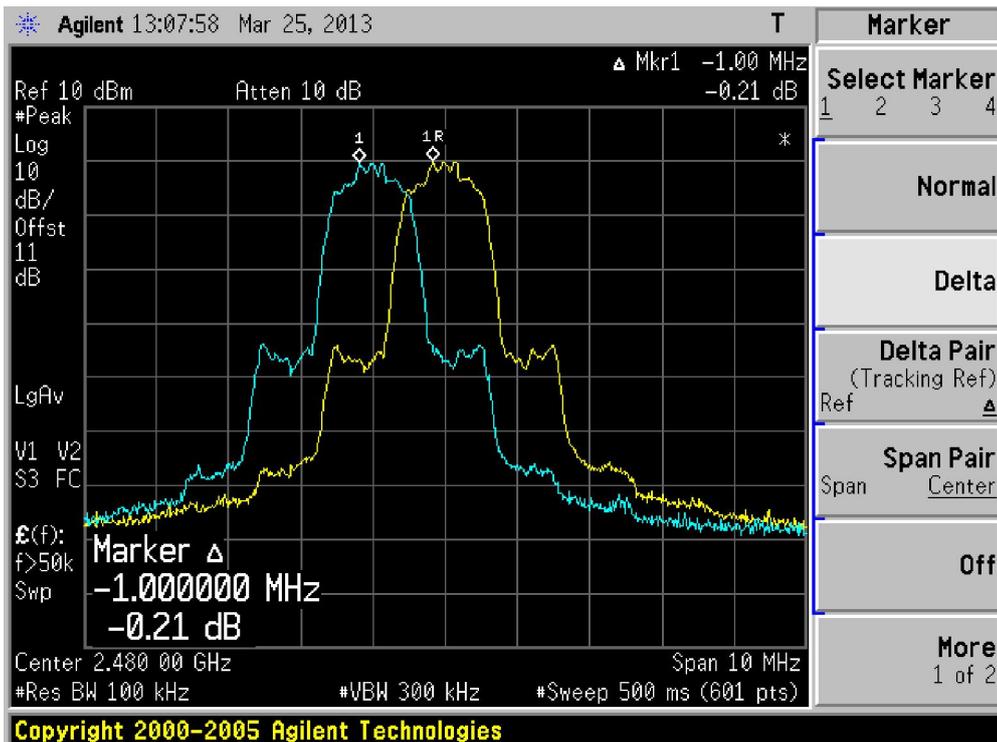


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Carrier Frequency Separation
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	>25 kHz or 2/3 of 20 dB BW	Pass
39	2441	1000	>25 kHz or 2/3 of 20 dB BW	Pass
78	2480	1000	>25 kHz or 2/3 of 20 dB BW	Pass


Channel 00 (2402MHz)

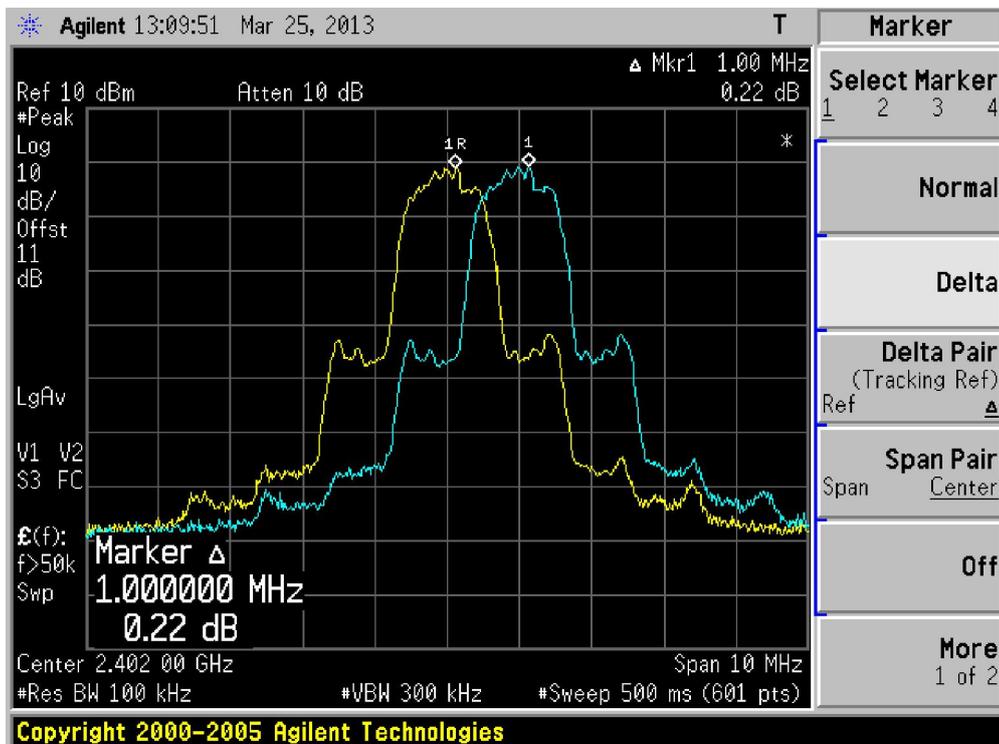

Channel 39 (2441MHz)

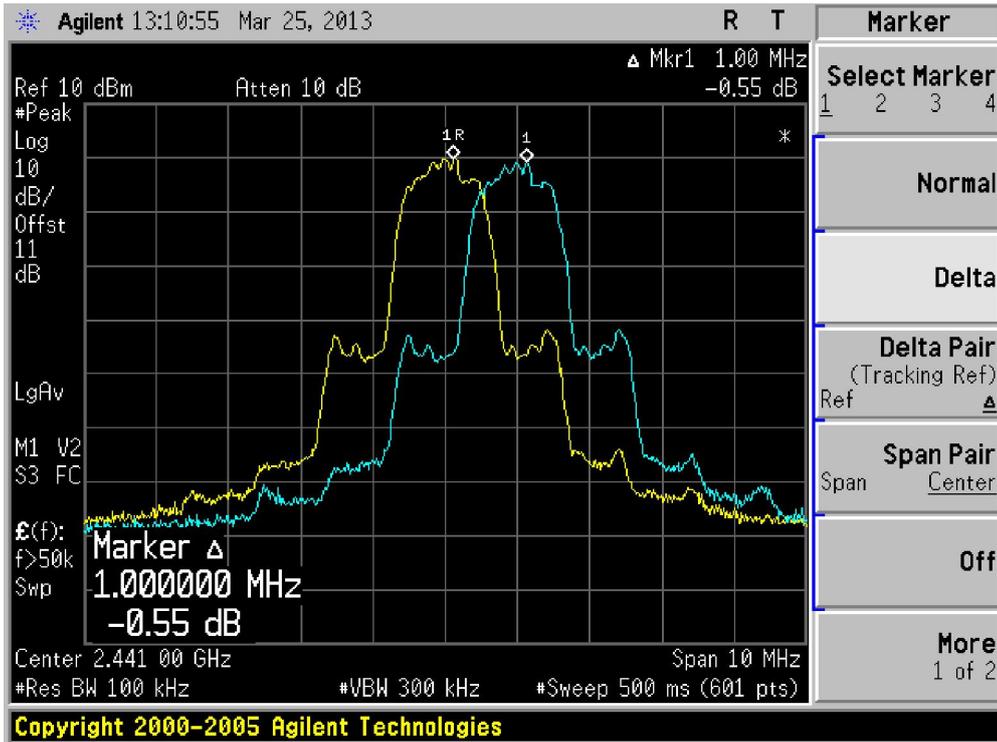

Channel 78 (2480MHz)

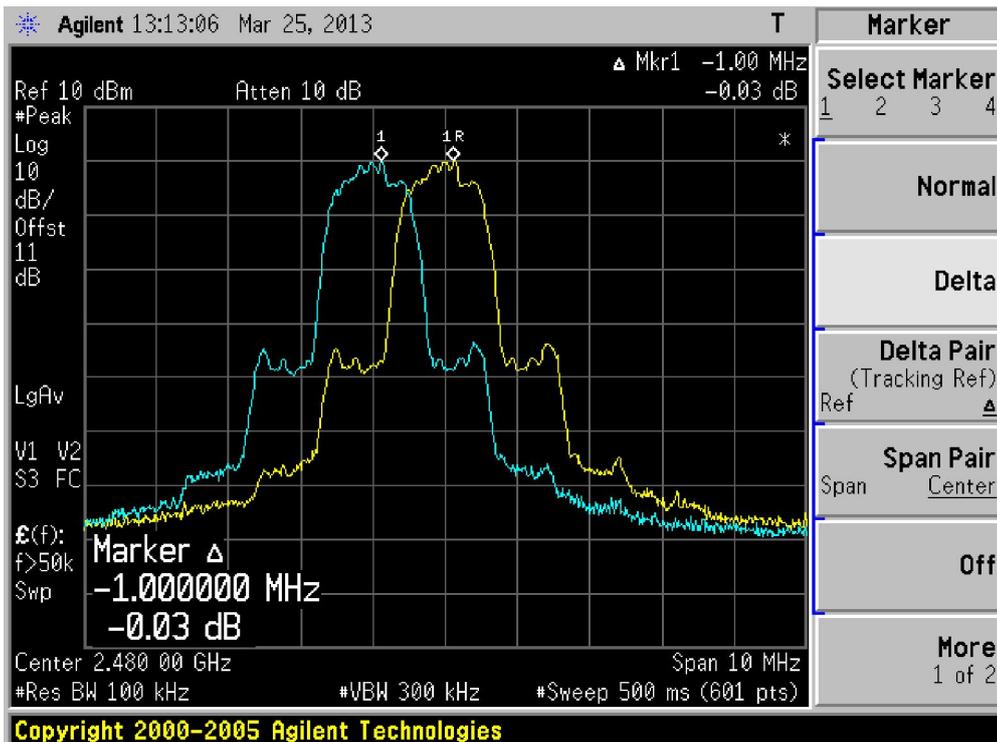

7. Number of Hopping Frequencies


7.1. Test Equipment

Number of Hopping Frequencies / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2013.05.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

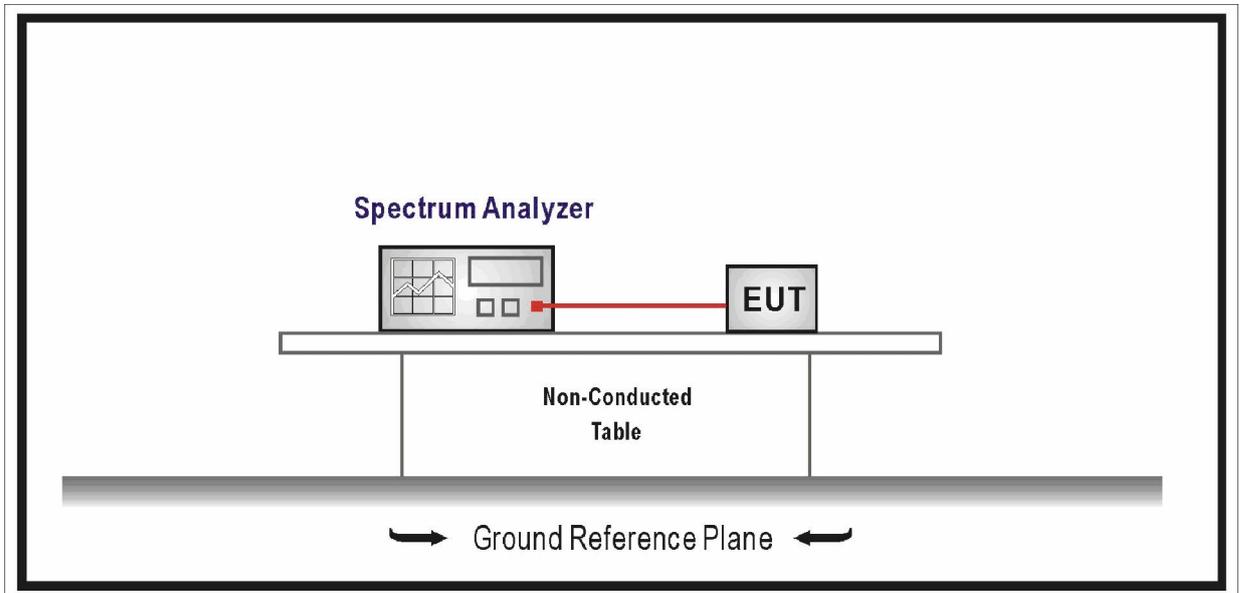

7.3. Limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
- For frequency hopping systems operating in 902-928 MHz band shall use at least 50 hopping frequencies.
- For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

7.4. Test Procedure

According to ANSI C63.10: 2009.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \cong 1% of the span

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. It may prove necessary to bread the span up to sections, in order to clearly show all of the hopping frequencies.

7.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2421 MHz

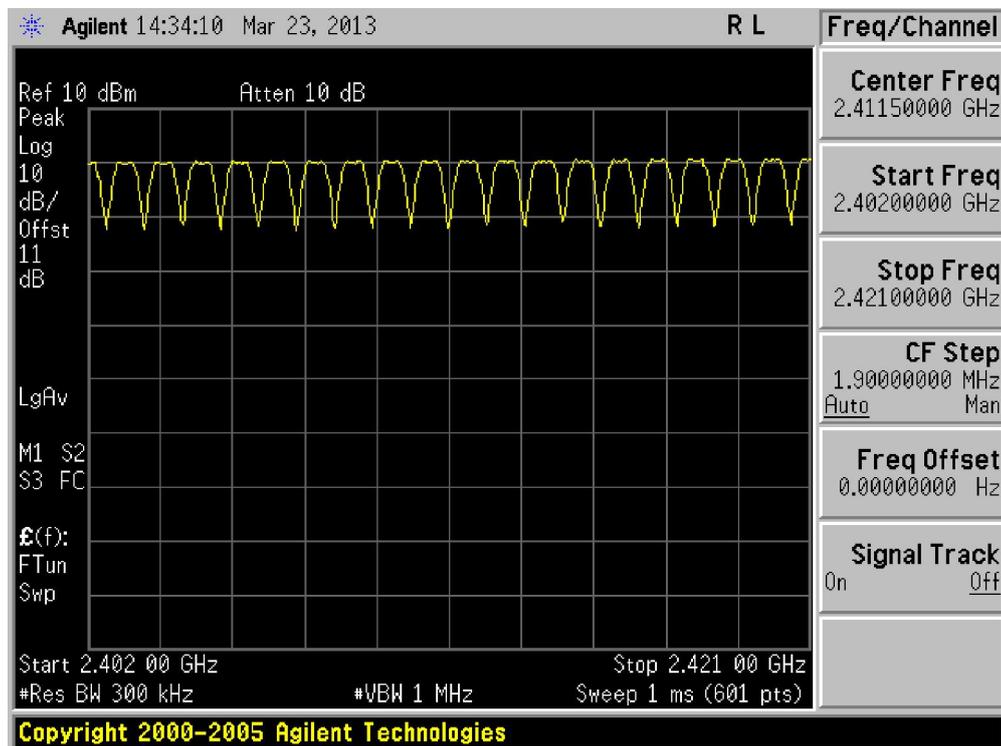


2422 - 2441 MHz

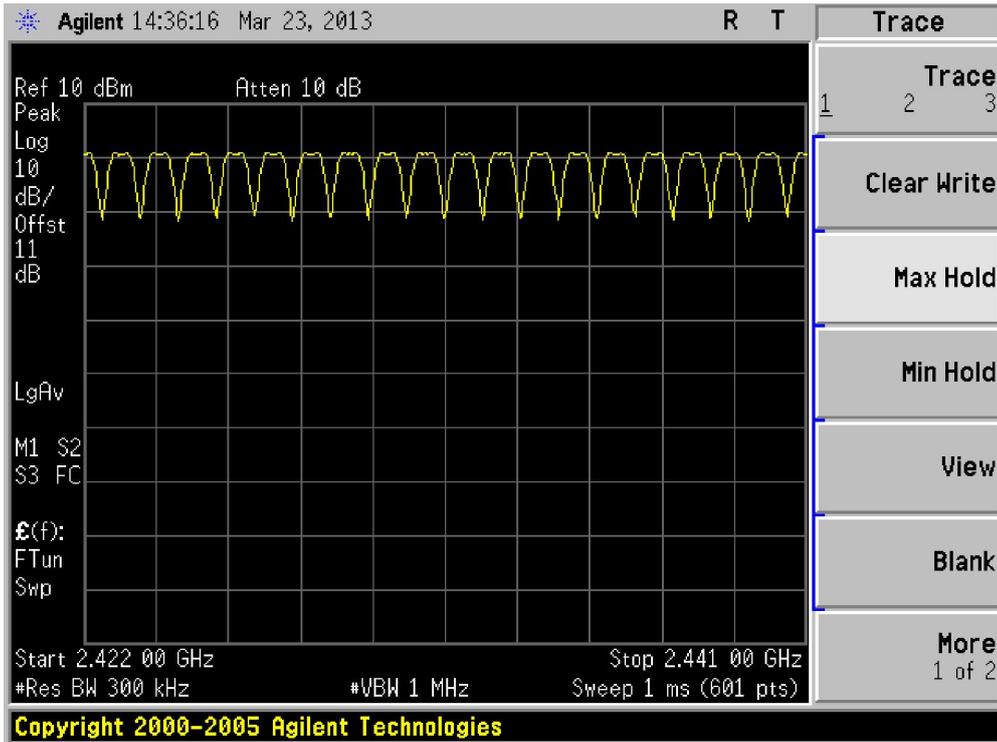

2442 - 2461 MHz

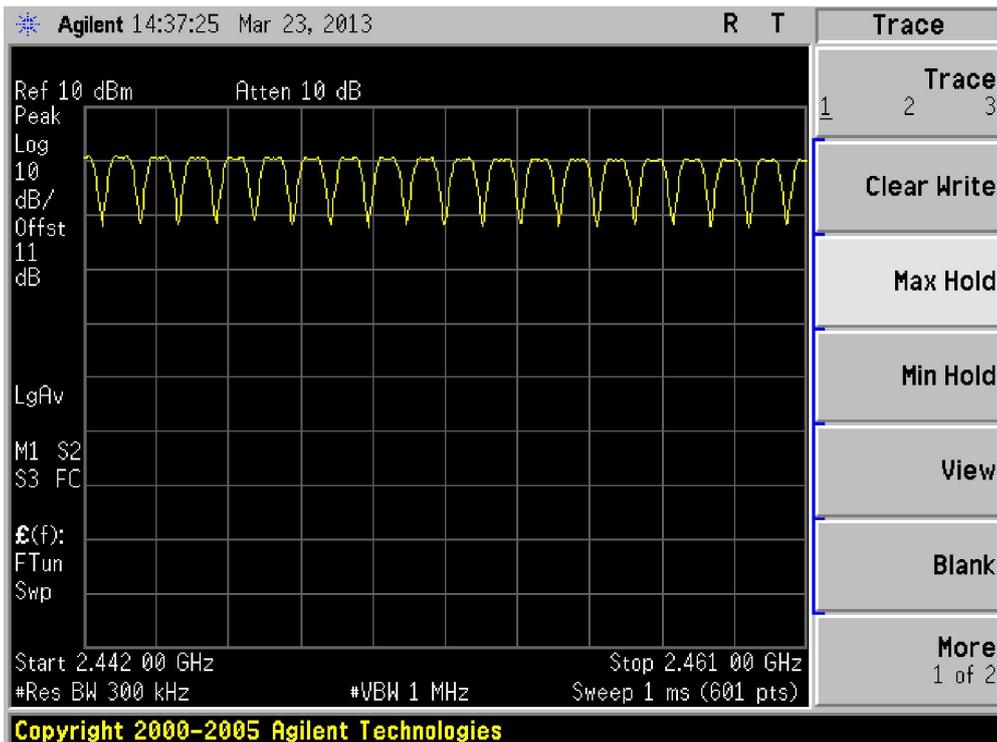


2462 - 2480 MHz

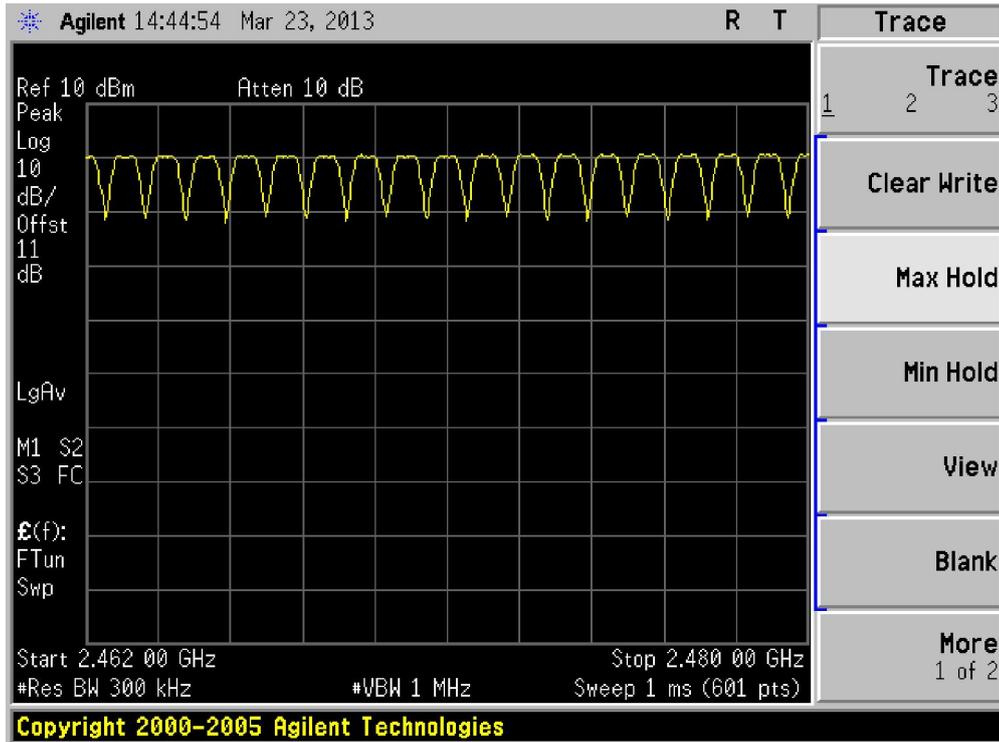


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2421 MHz

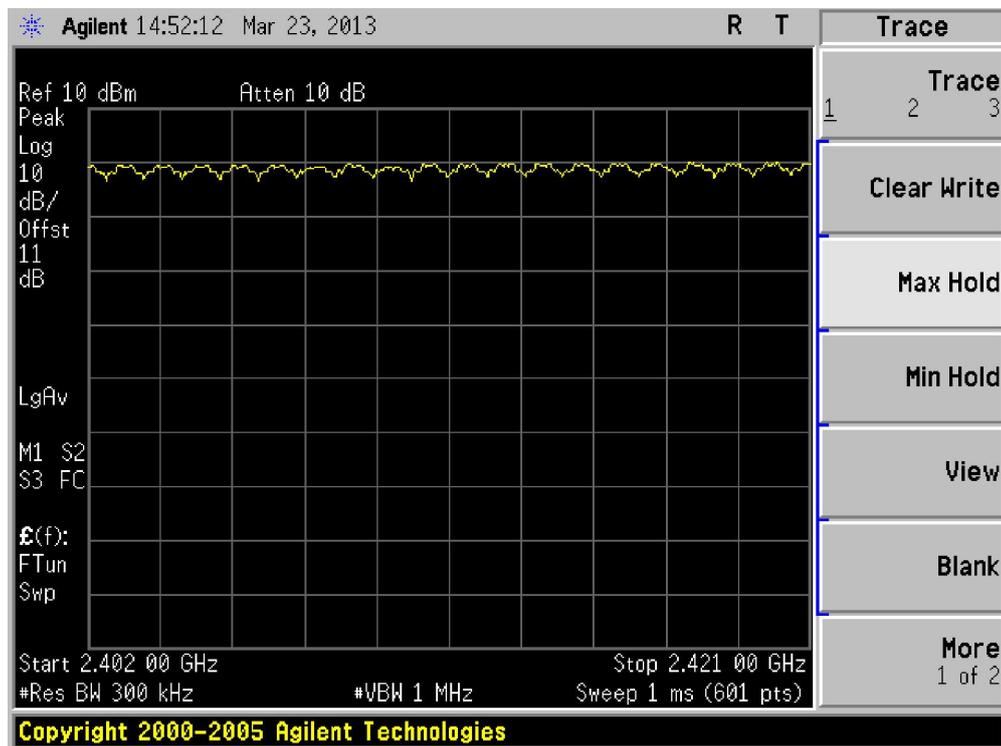


2422 - 2441 MHz

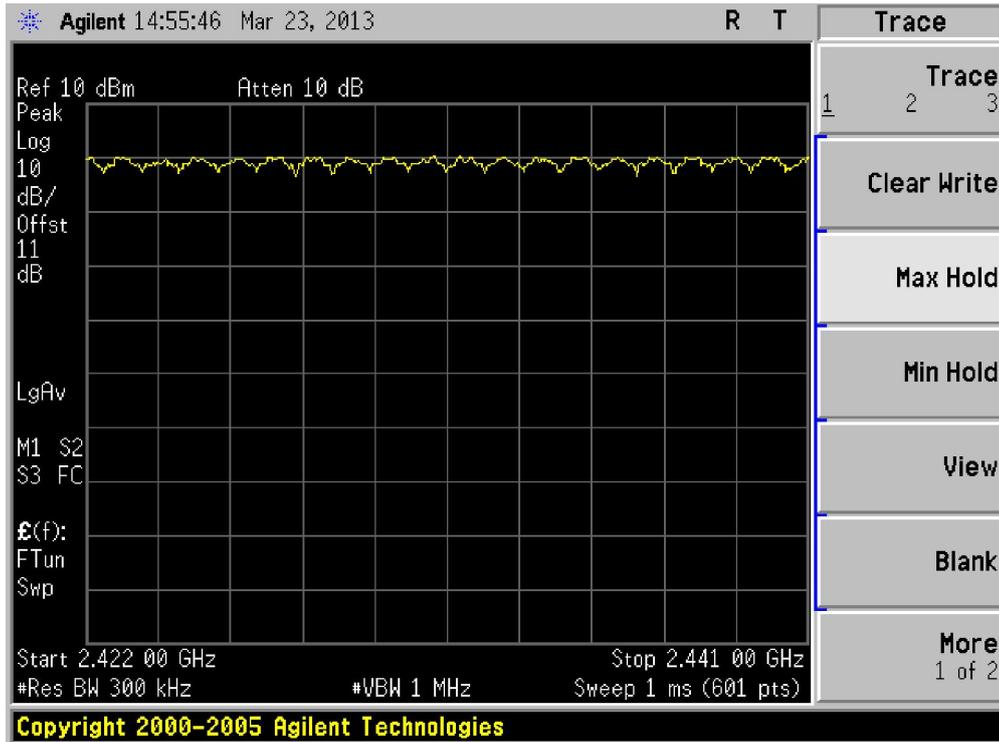

2442 - 2461 MHz

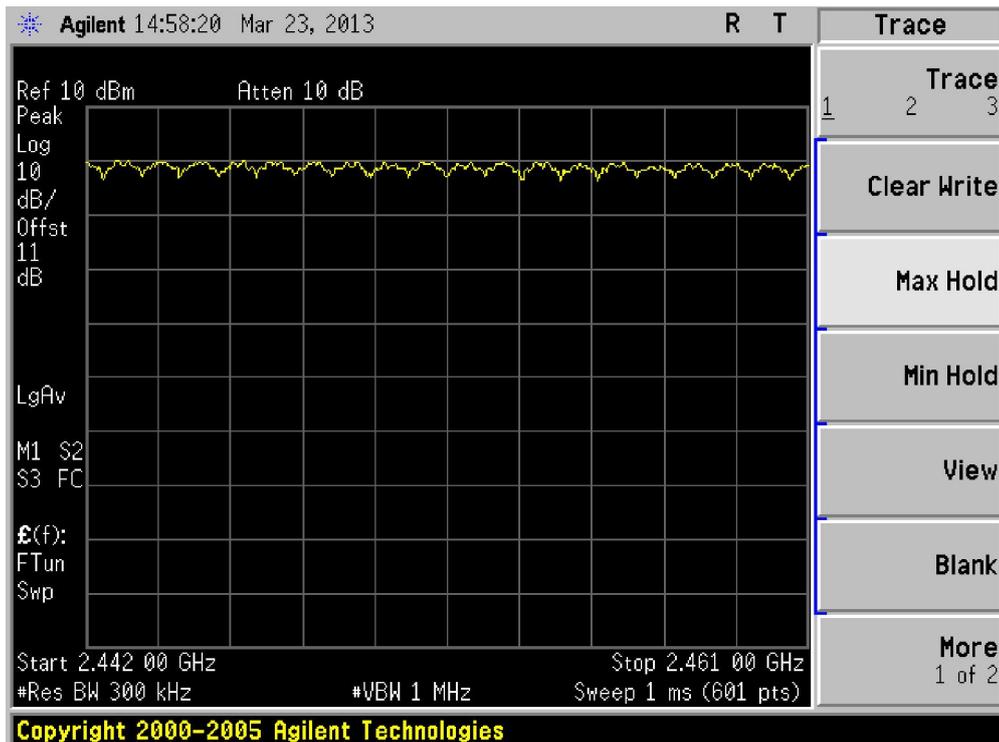


2462 - 2480 MHz

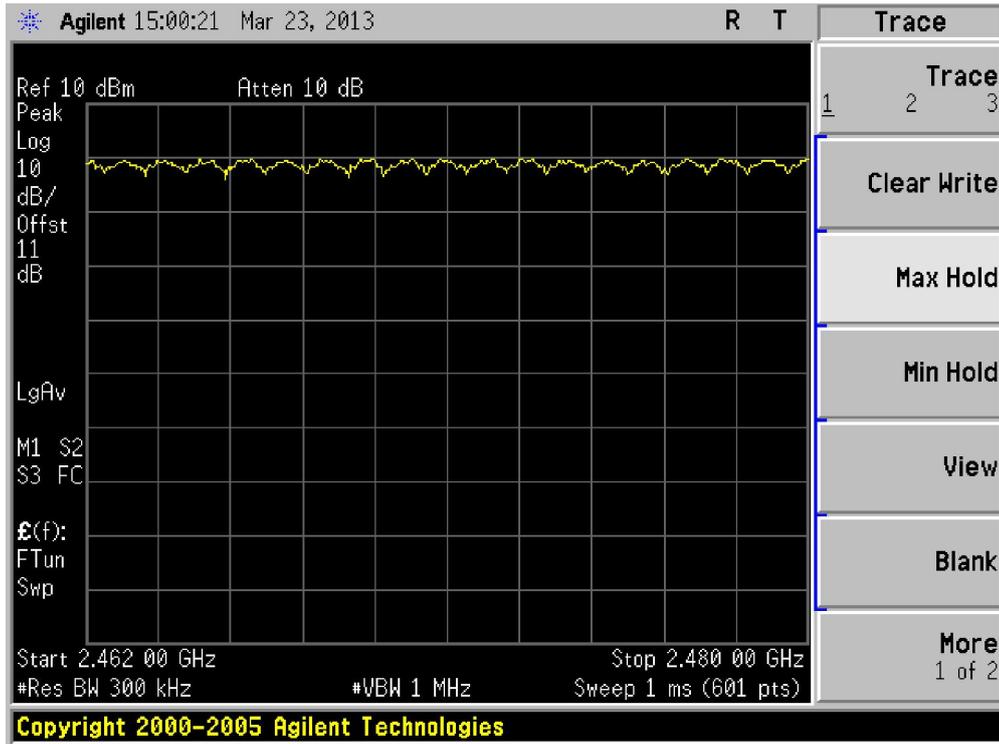


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Number of Hopping Frequencies
Test Site	:	TR-8
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


2402 - 2421 MHz

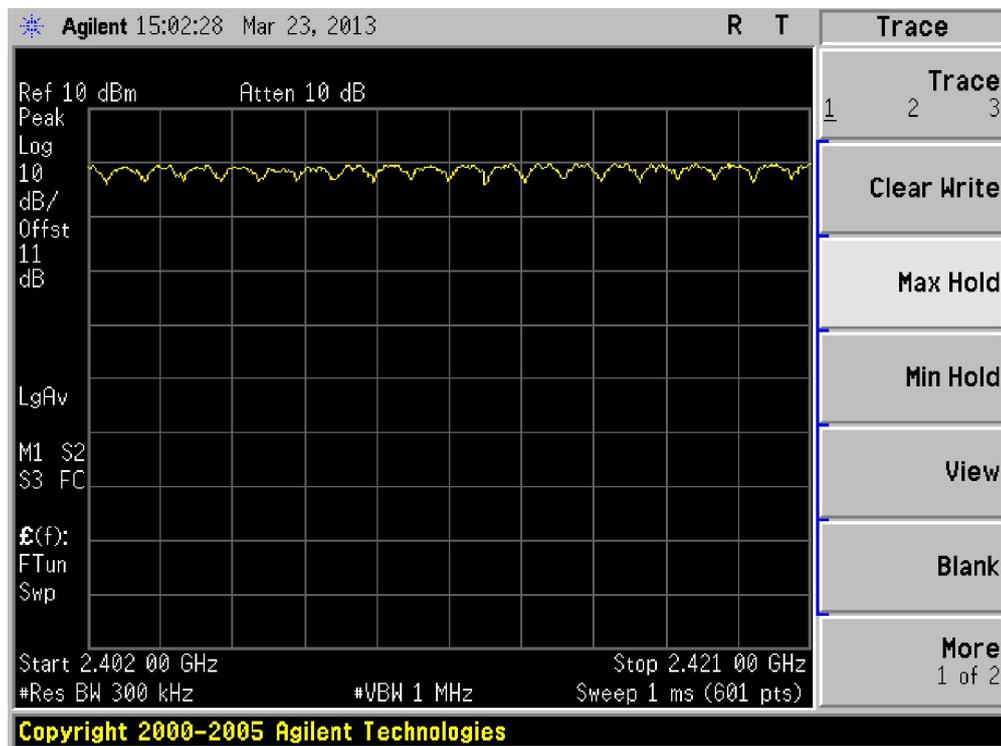


2422 - 2441 MHz

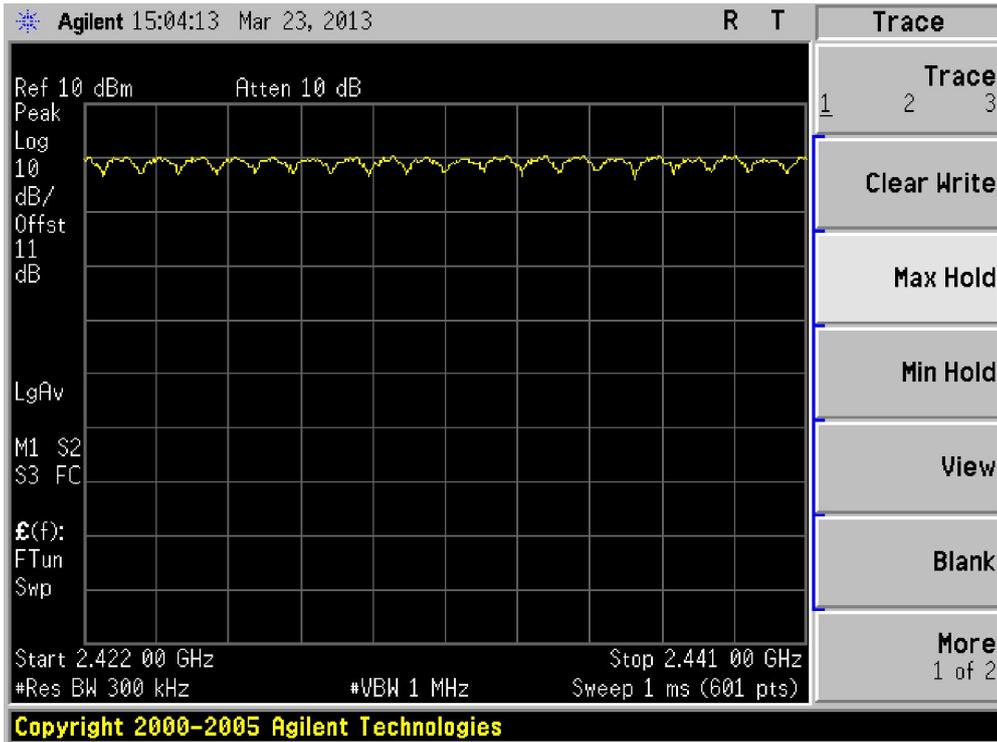

2442 - 2461 MHz

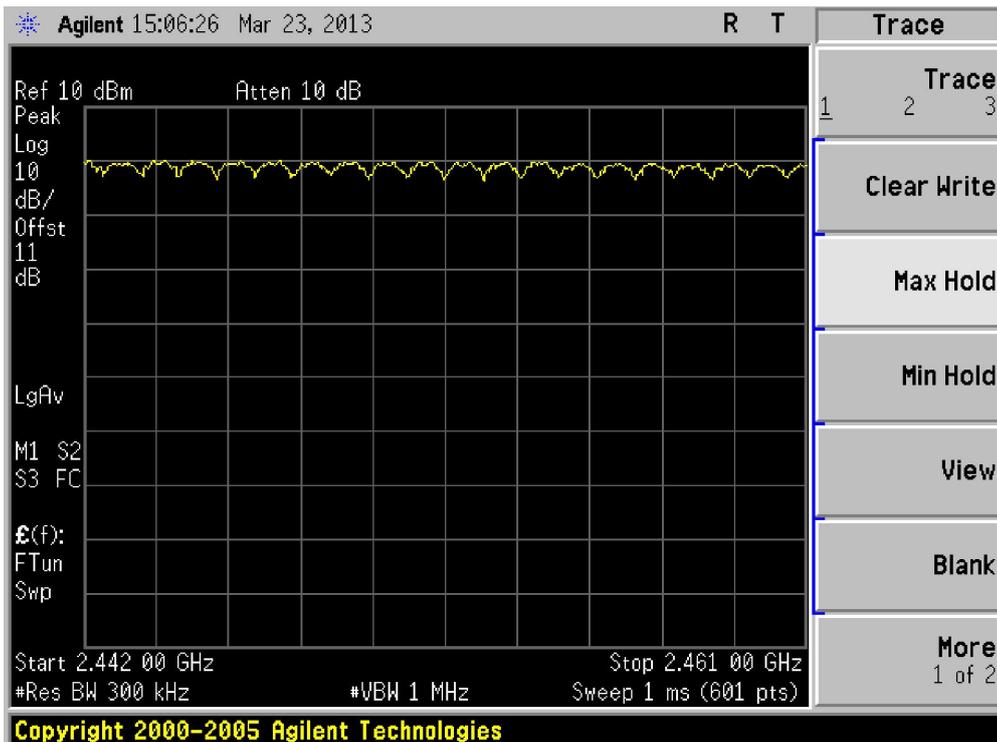

2462 - 2480 MHz

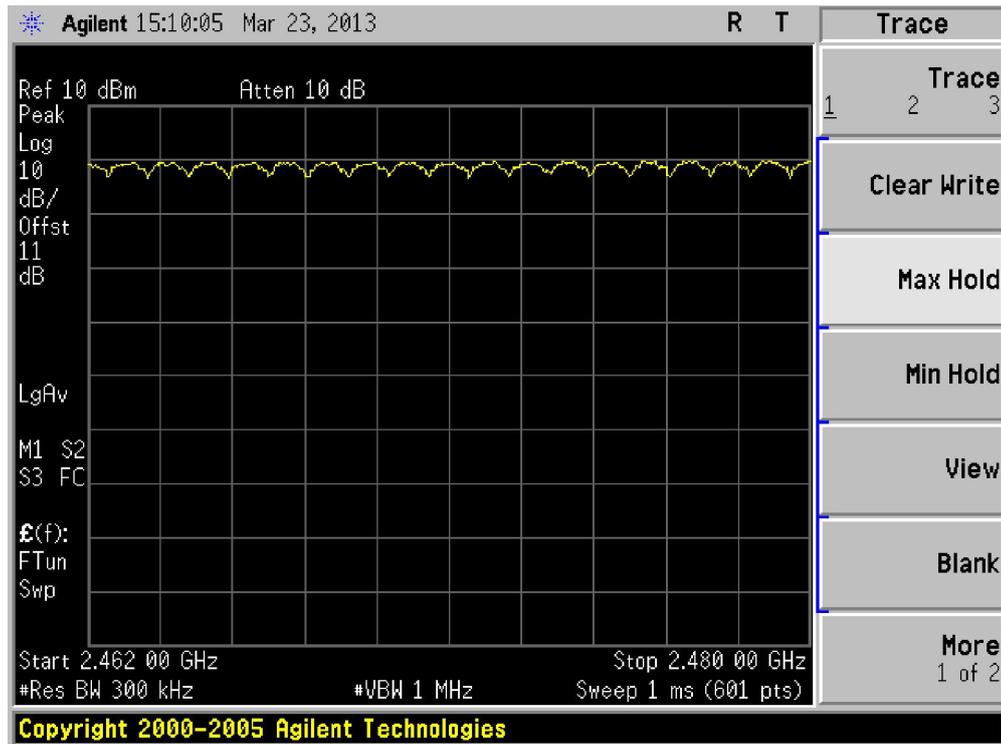

8. Time of Occupancy (Dwell Time)


8.1. Test Equipment

Time of Occupancy (Dwell Time) / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2013.05.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

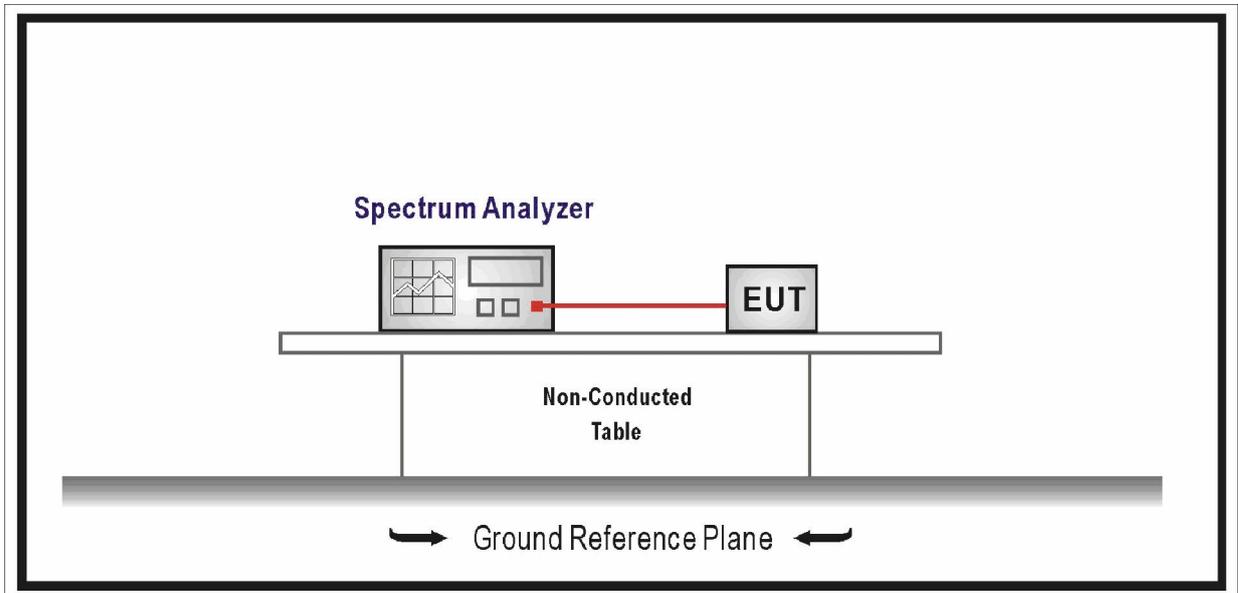

8.3. Limit

- For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; If the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
- Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75