

hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

- Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

8.4. Test Procedure

According to ANSI C63.10: 2009.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1MHz

VBW \cong RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

8.5. Uncertainty

The measurement uncertainty is defined as ± 0.1 us

8.6. Test Result


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-3Mbps(8DPSK_DH1)


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	122.56	< 400	Pass

Test Time Period: $0.4 * 79 = 31.6$ sec, Hopping Times Within 1sec: $40/50$ msec= 800 hops/sec.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(0.383\text{ms} * 800) / 79] * 31.6 = 122.56$ msec

Channel 39 (2441MHz)-(3DH1)

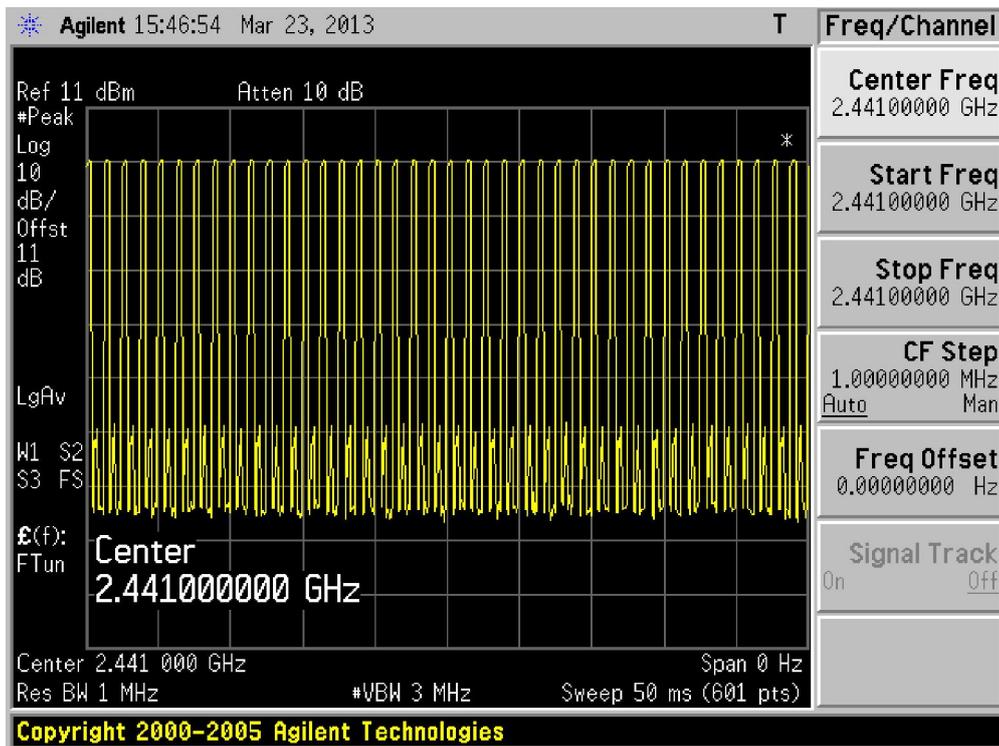

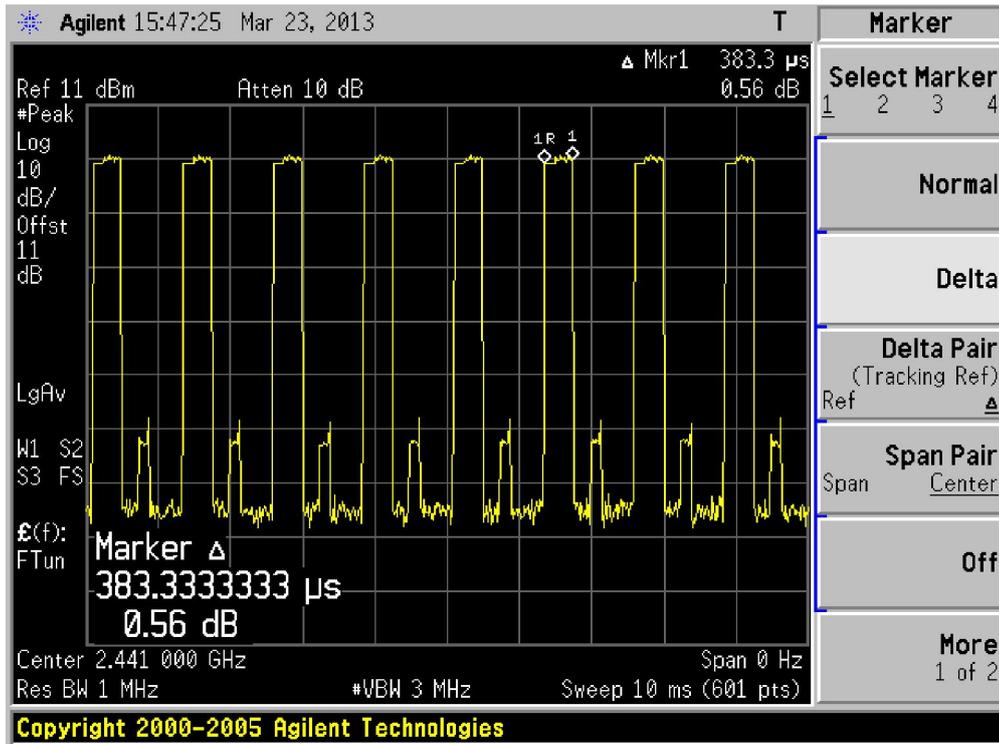


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-3Mbps(8DPSK_DH3)


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	261.28	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: $20/50$ msec= 400 hops/sec.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(1.633 \text{ ms} \times 400)/79] \times 31.6 = 261.28$ msec

Channel 39 (2441MHz) - (3DH3)

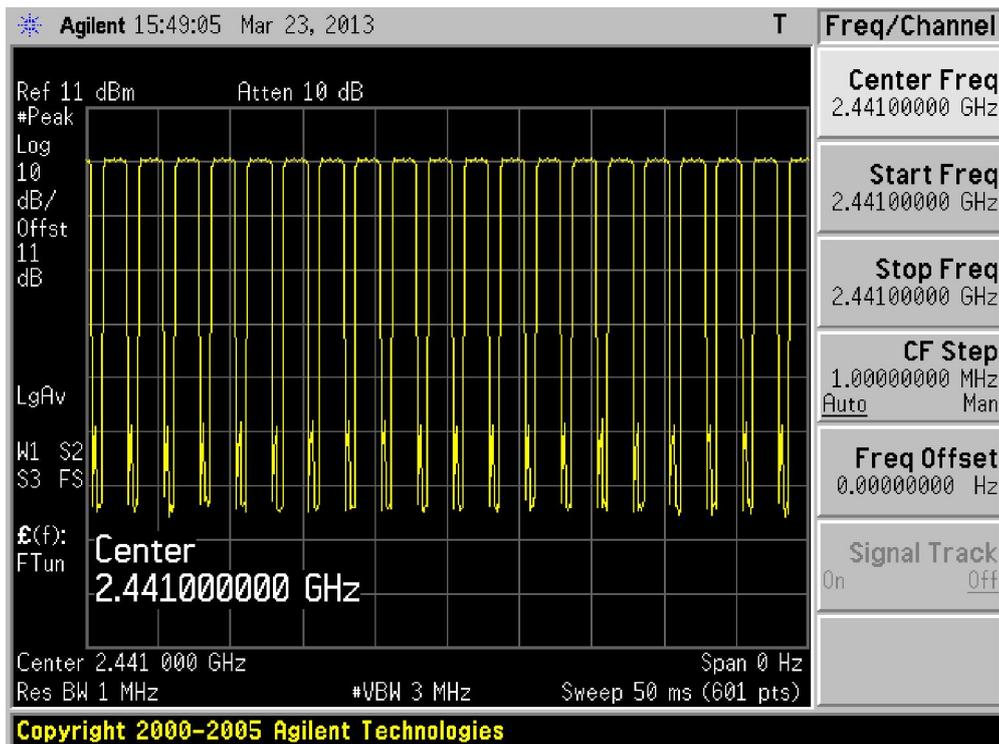

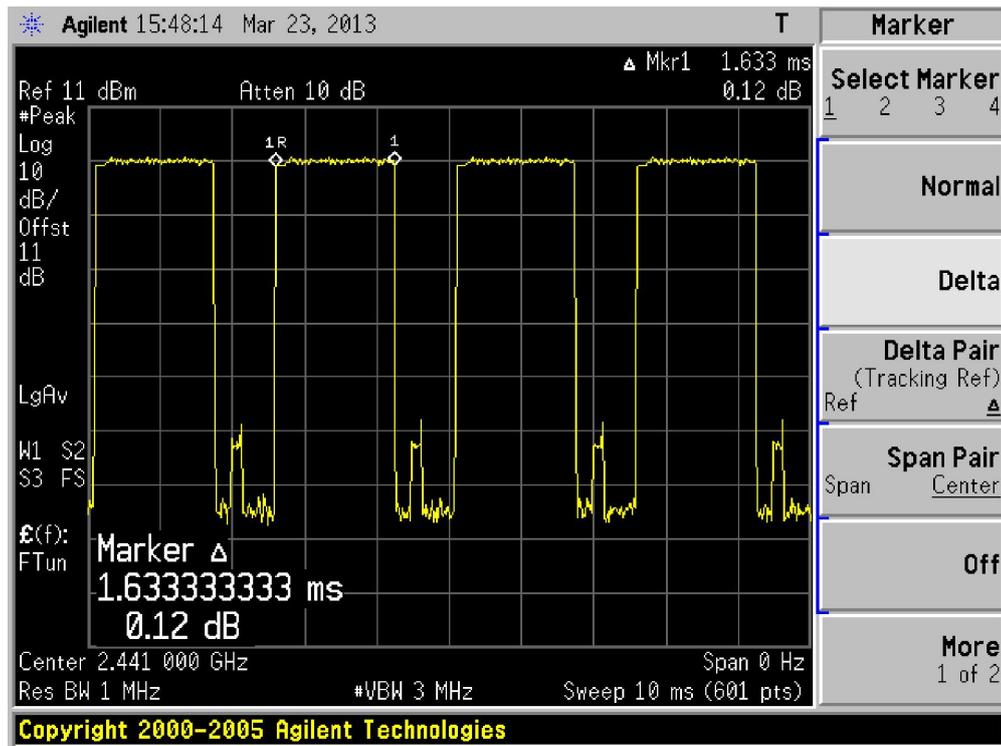


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Time of Occupancy (Dwell Time)
Test Site	:	TR-8
Test Mode	:	Transmitter-3Mbps(8DPSK_DH5)


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	322.90	< 400	Pass

Test Time Period: $0.4 \times 79 = 31.6$ sec, Hopping Times Within 1sec: $14/50$ msec=280 hops/sec.

- 2441MHz, The Maximum Occupancy Time Within 31.6sec: $[(2.883 \text{ ms} \times 280)/79] \times 31.6 = 322.90$ msec

Channel 39 (2441MHz) - (3DH5)

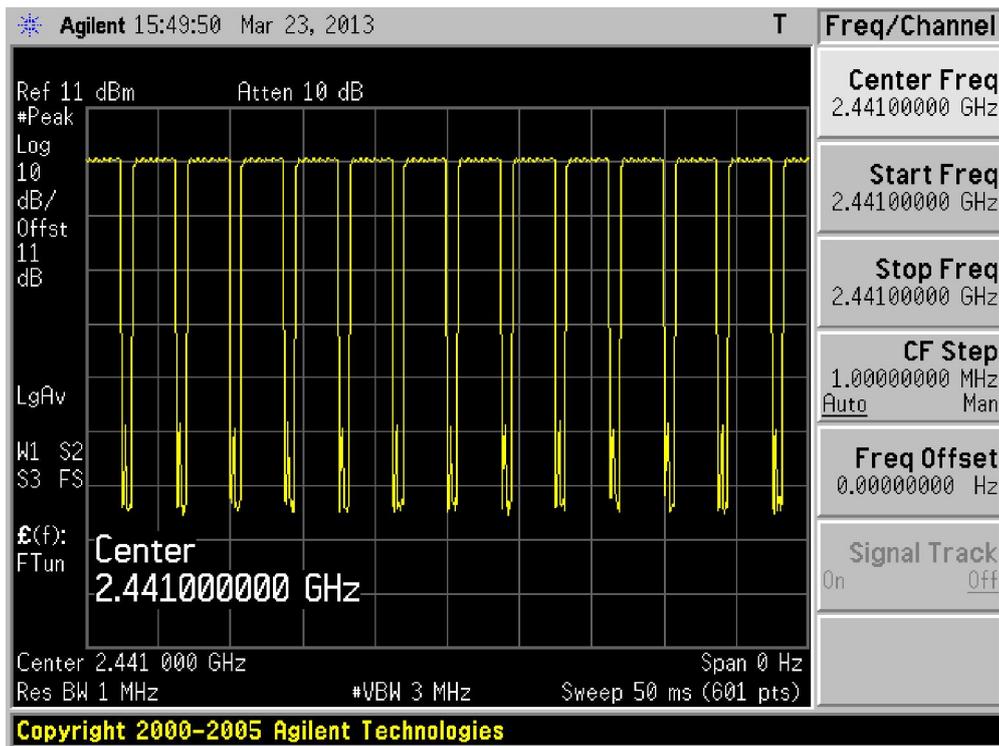

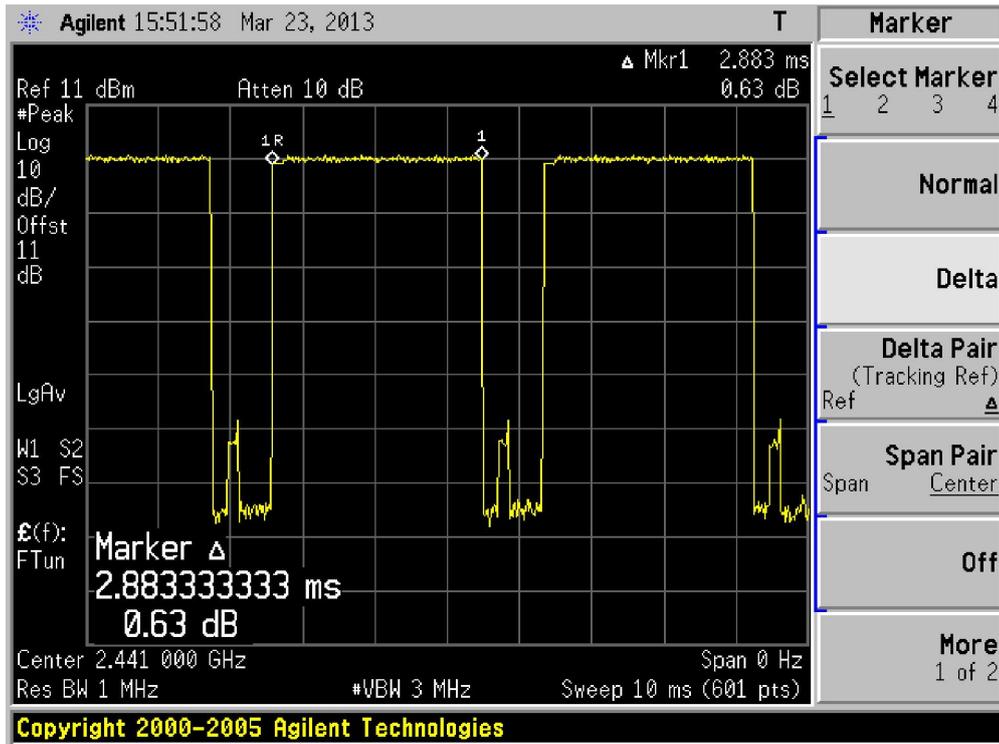

9. Peak Output Power


9.1. Test Equipment

Peak Output Power / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2013.05.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

9.2. Test Setup

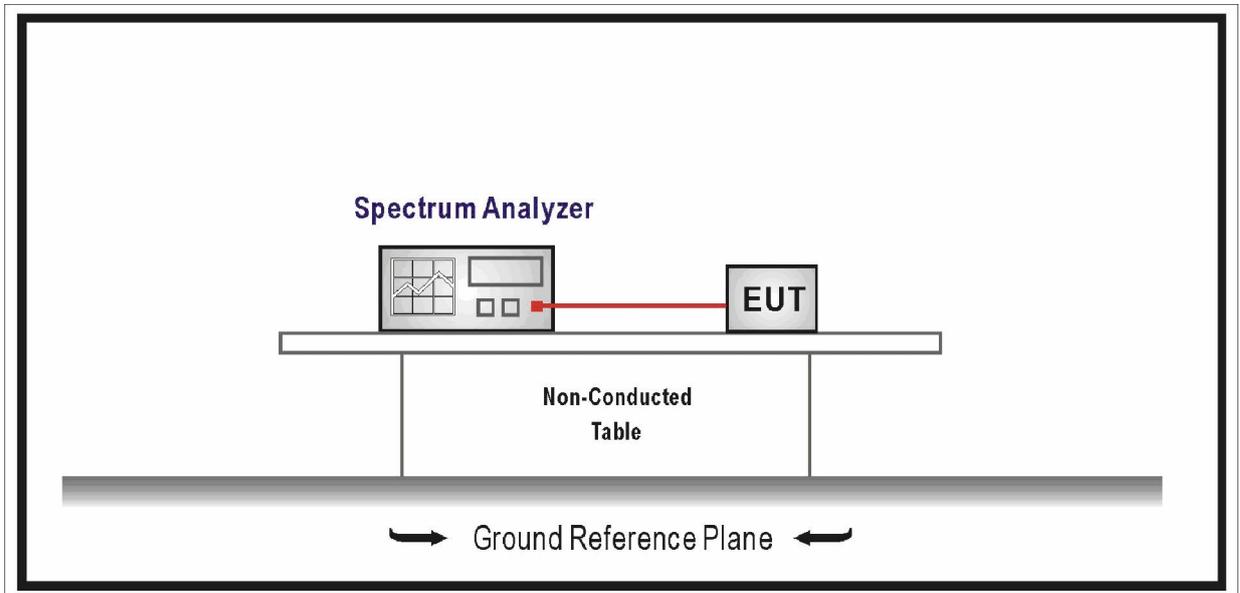

9.3. Limit

- For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
- For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

Note: the conducted output power limit specified above is based on the use the antennas with

directional gains that do not exceed 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values above, as appropriate, by the amount in dB that the directional gain of antenna exceeds 6 dBi.

9.4. Test Procedure

According to ANSI C63.10: 2009.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured.

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (don't forget added the external attenuation and cable loss).

9.5. Uncertainty


The measurement uncertainty is defined as ± 1.0 dB

9.6. Test Result


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Power Output
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	0.08	30.00	Pass
39	2441	1.11	30.00	Pass
78	2480	0.87	30.00	Pass


DH5 2402MHz

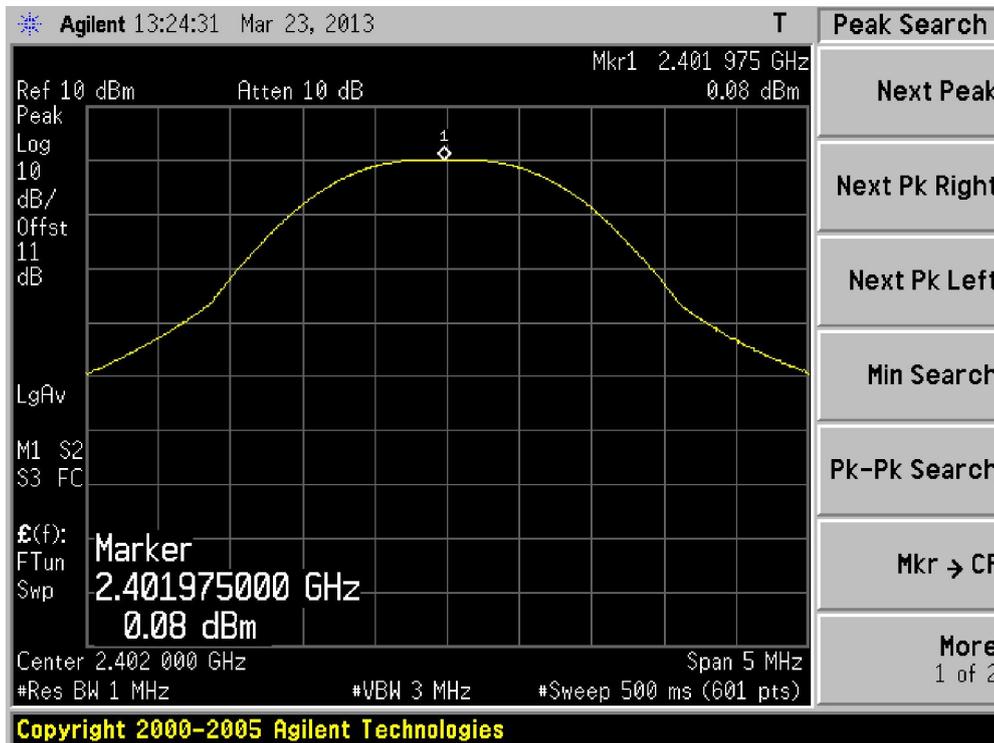

DH5 2441MHz

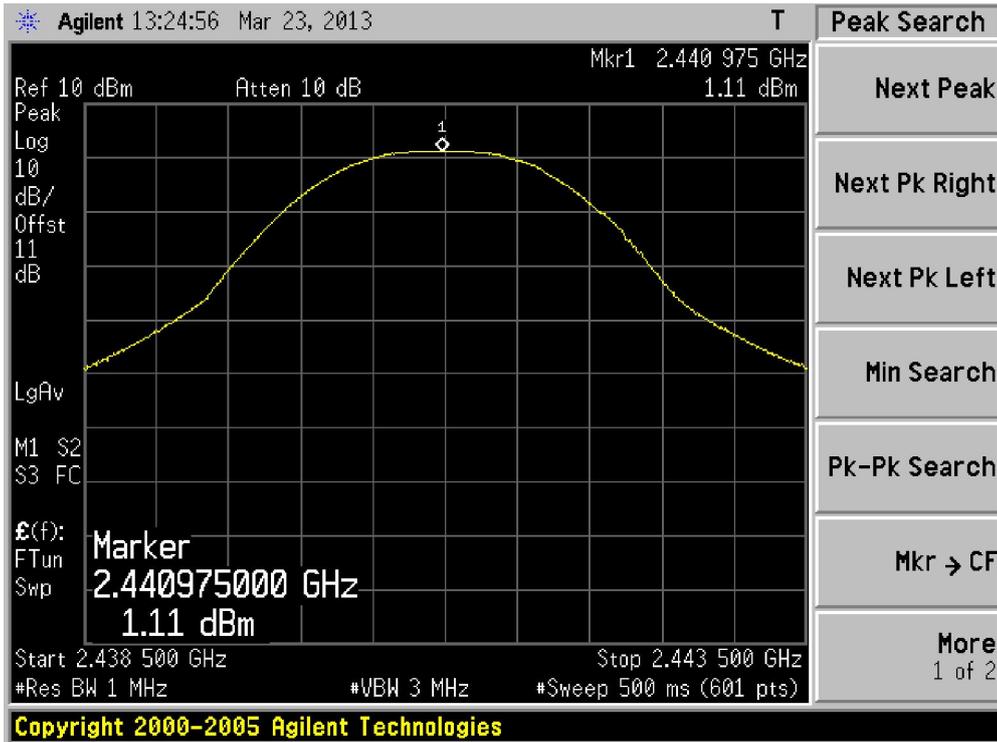


DH5 2480MHz

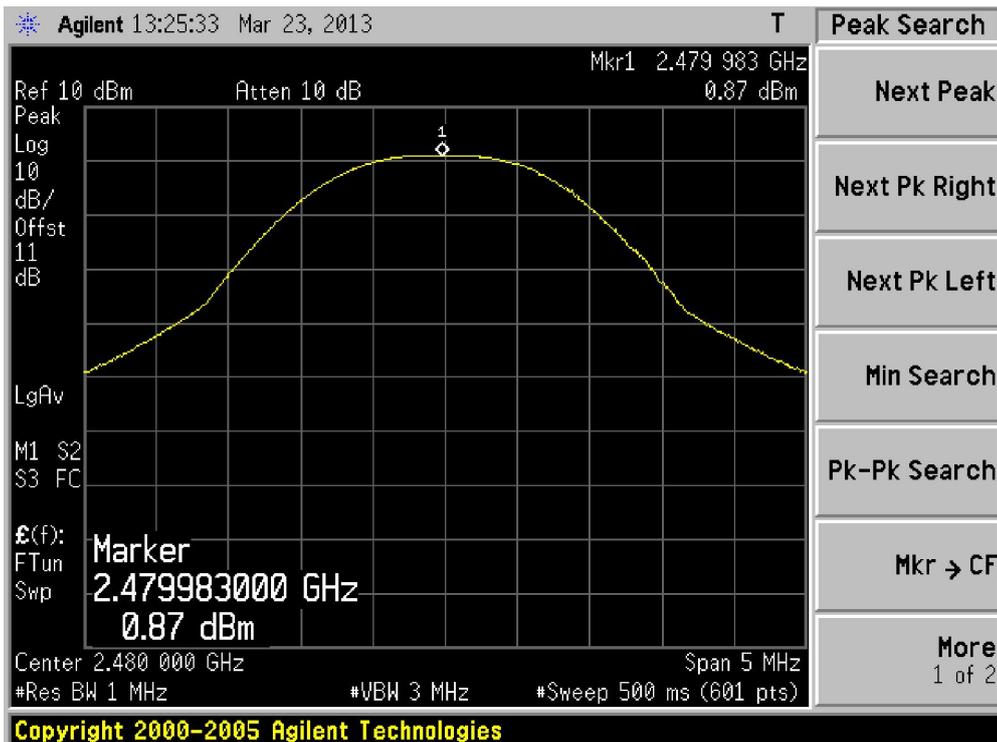


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Power Output
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	0.71	30.00	Pass
39	2441	1.77	30.00	Pass
78	2480	1.53	30.00	Pass


2DH5 2402MHz

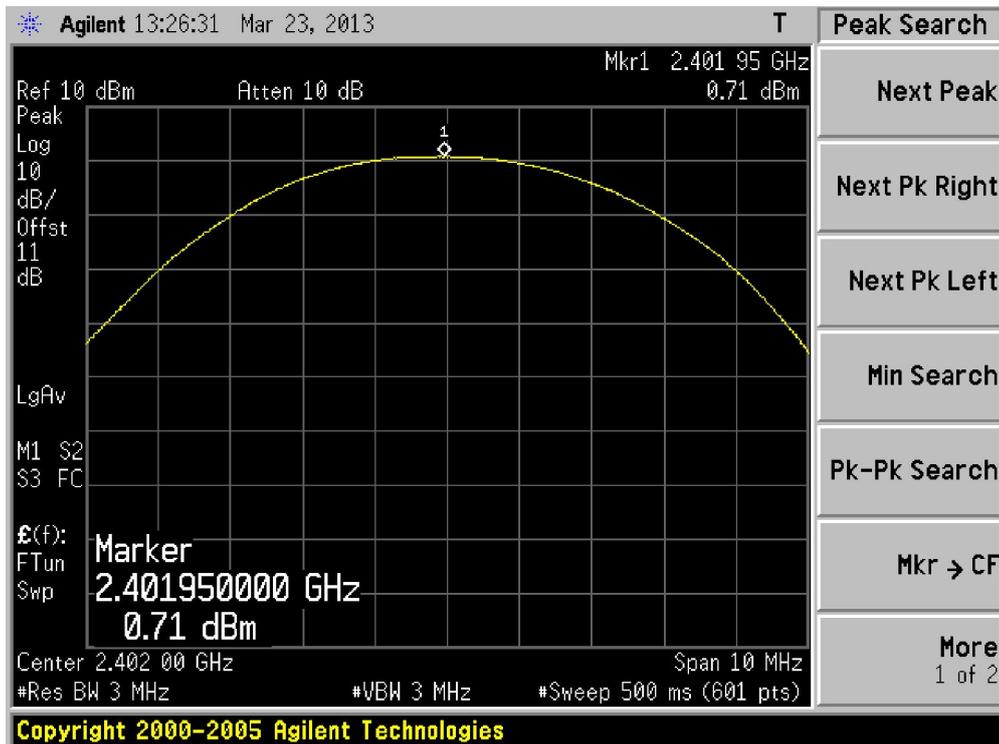

2DH5 2441MHz

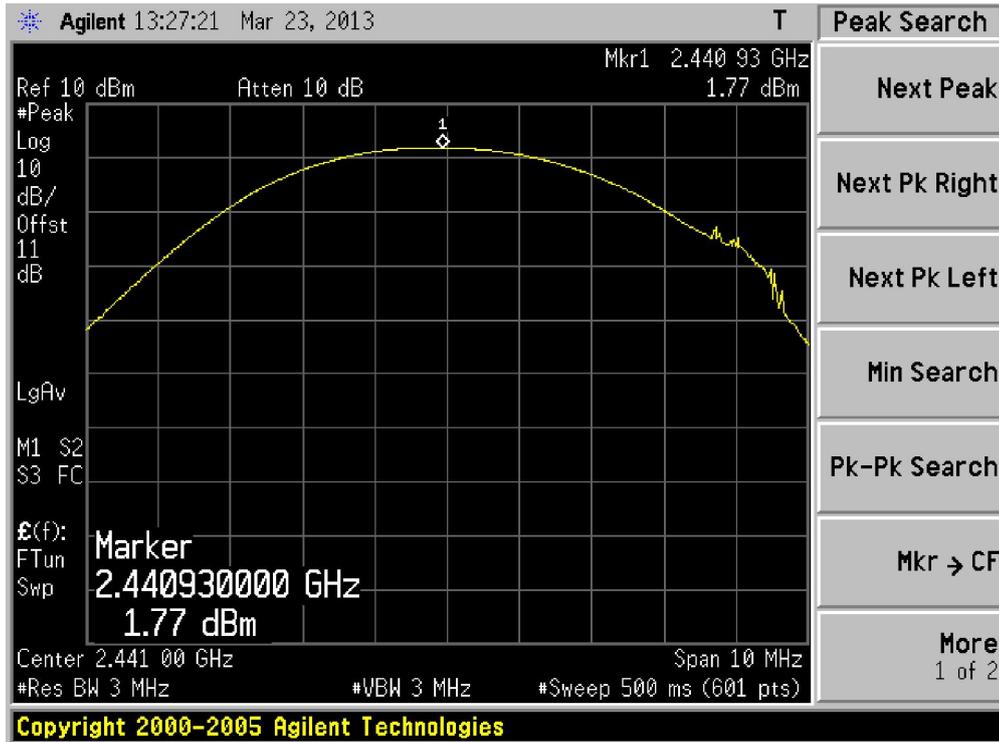


2DH5 2480MHz

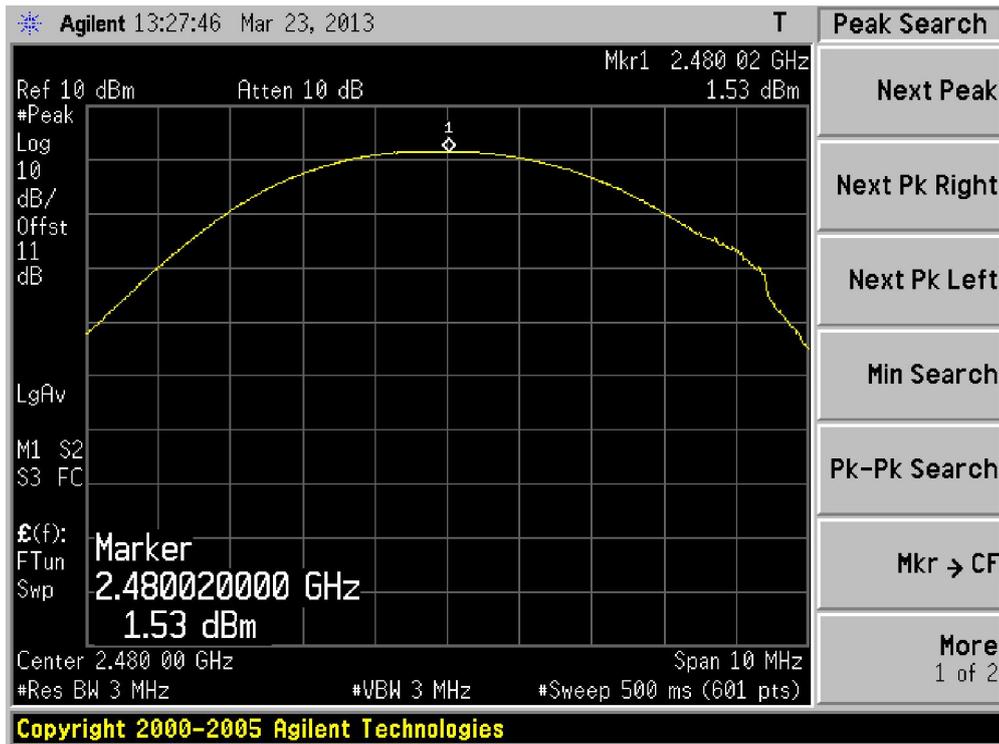


Product	: WCDMA Digital Mobile Phone
Test Item	: Power Output
Test Mode	: Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
0	2402	1.03	30.00	Pass
39	2441	2.02	30.00	Pass
78	2480	1.85	30.00	Pass


3DH5 2402MHz

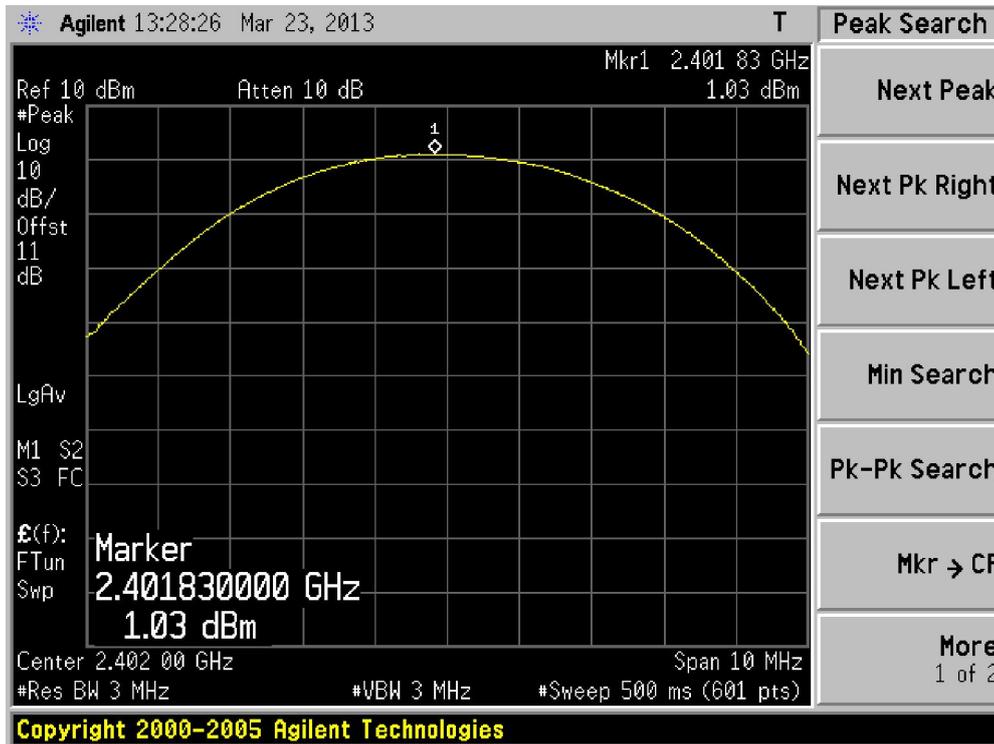

3DH5 2441MHz

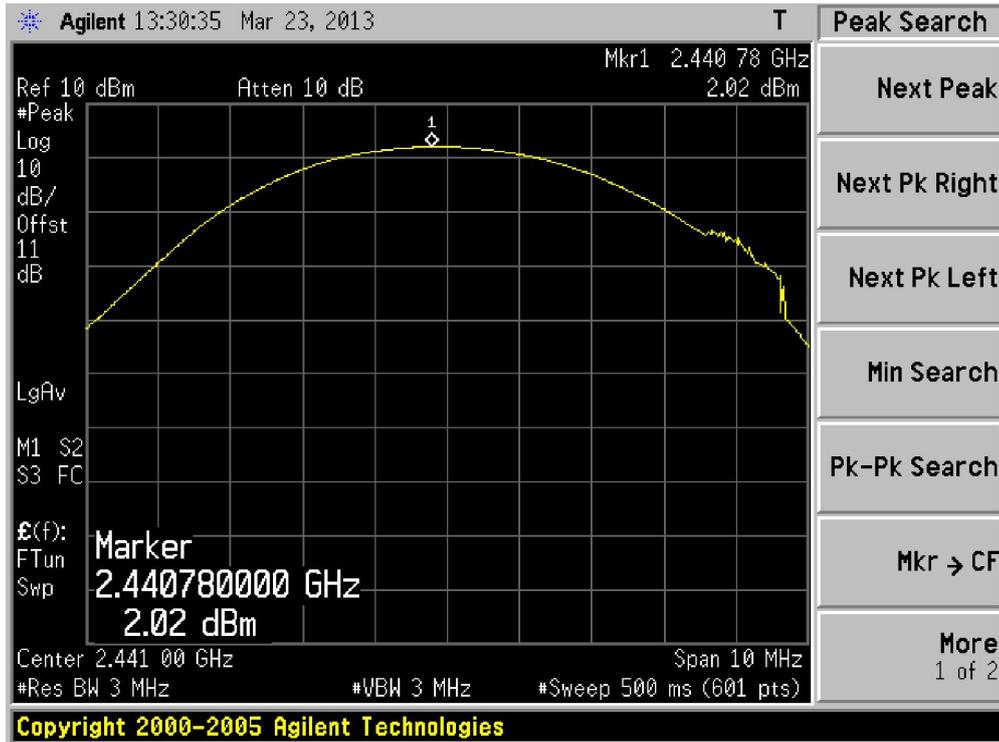

3DH5 2480MHz

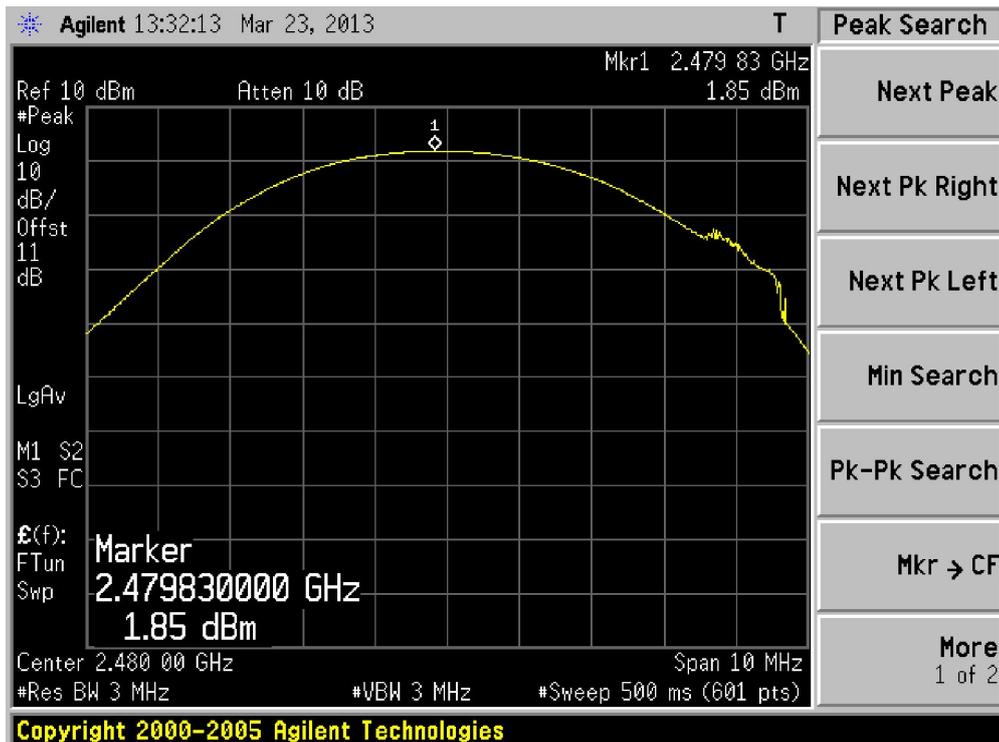

10. Band-edge Compliance of RF Conducted Emissions


10.1. Test Equipment

Band-edge Compliance of RF Conducted Emissions / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2013.05.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

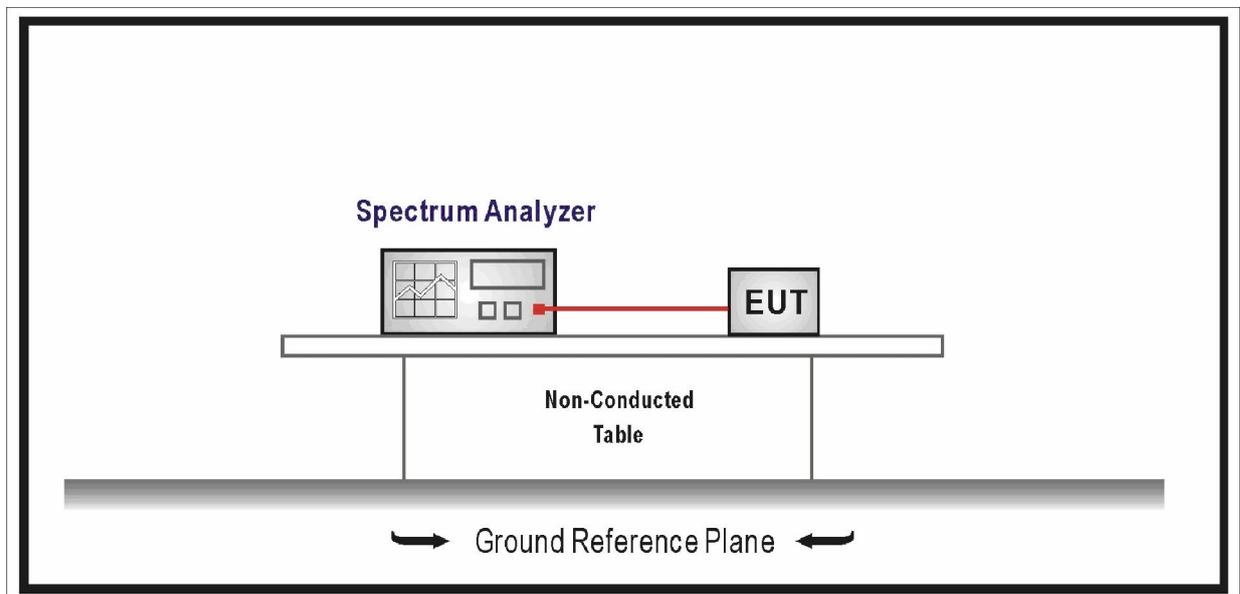

10.3. Limit

- Intentional radiators operating under the alternative provisions to the general emission limits as contained in 15.217 through 15.257 and in Subpart E of FCC part 15, must be designed to ensure that 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz

bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) of FCC part 15 is not required.

10.4. Test Procedure

According to ANSI C63.10: 2009.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.

RBW \cong 1% of the span

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge.

Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.


10.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB


10.6. Test Result

Product	:	WCDMA Digital Mobile Phone
Test Item	:	Band-edge Compliance of RF Conducted Emissions
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)

Channel 00 (2402MHz)

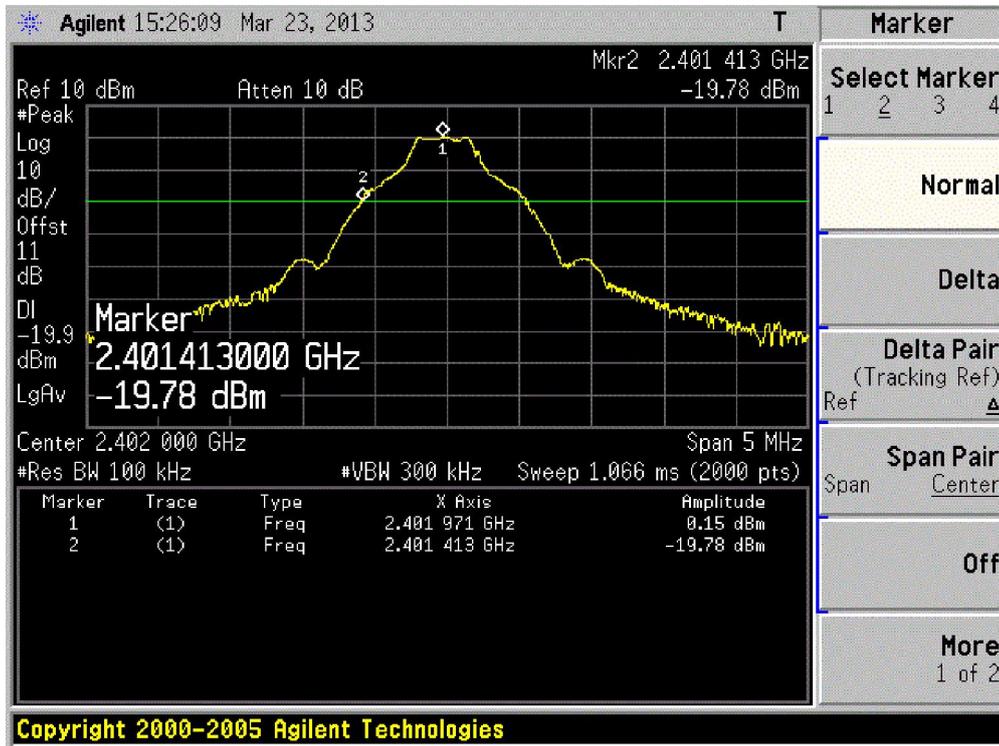


Channel 78 (2480MHz)

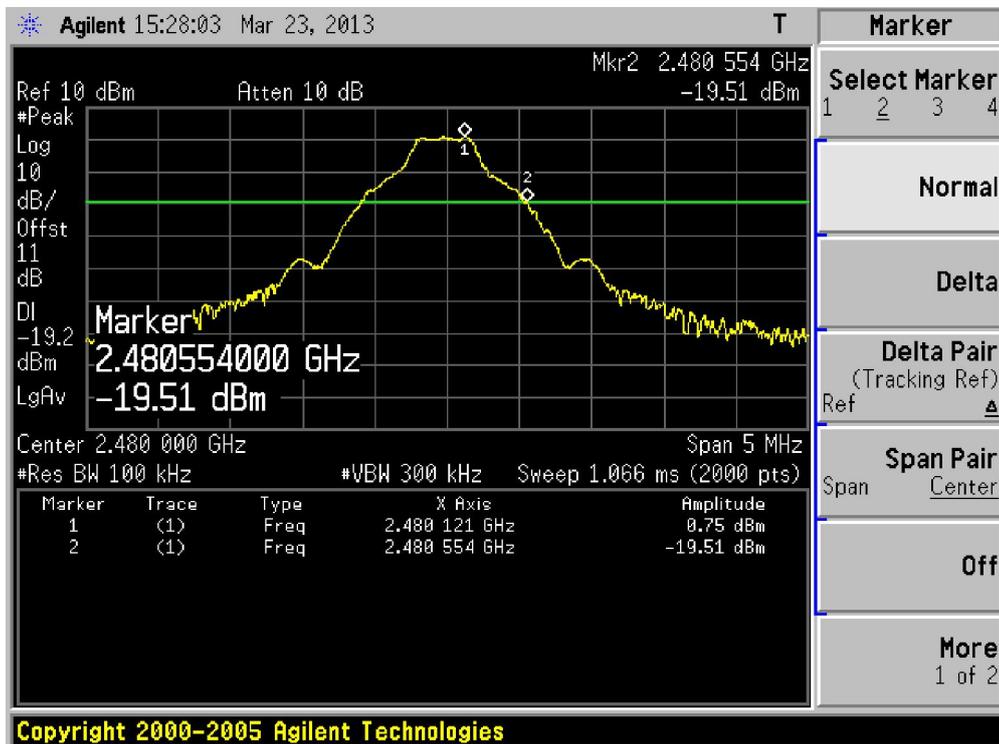


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Band-edge Compliance of RF Conducted Emissions
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)

Channel 00 (2402MHz)

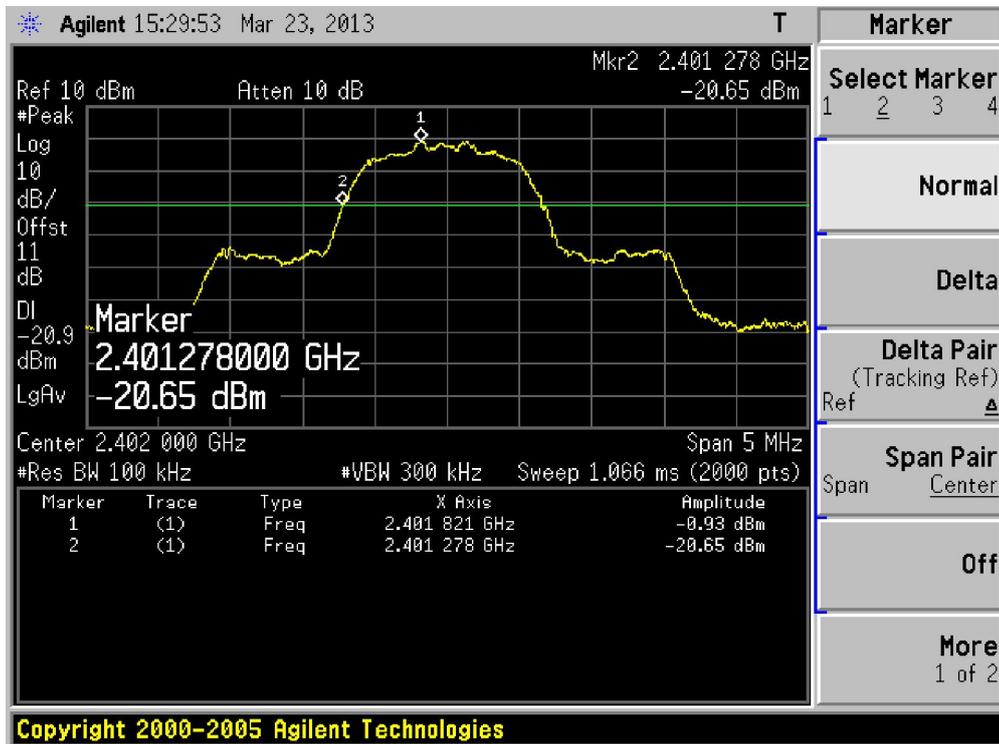


Channel 78 (2480MHz)

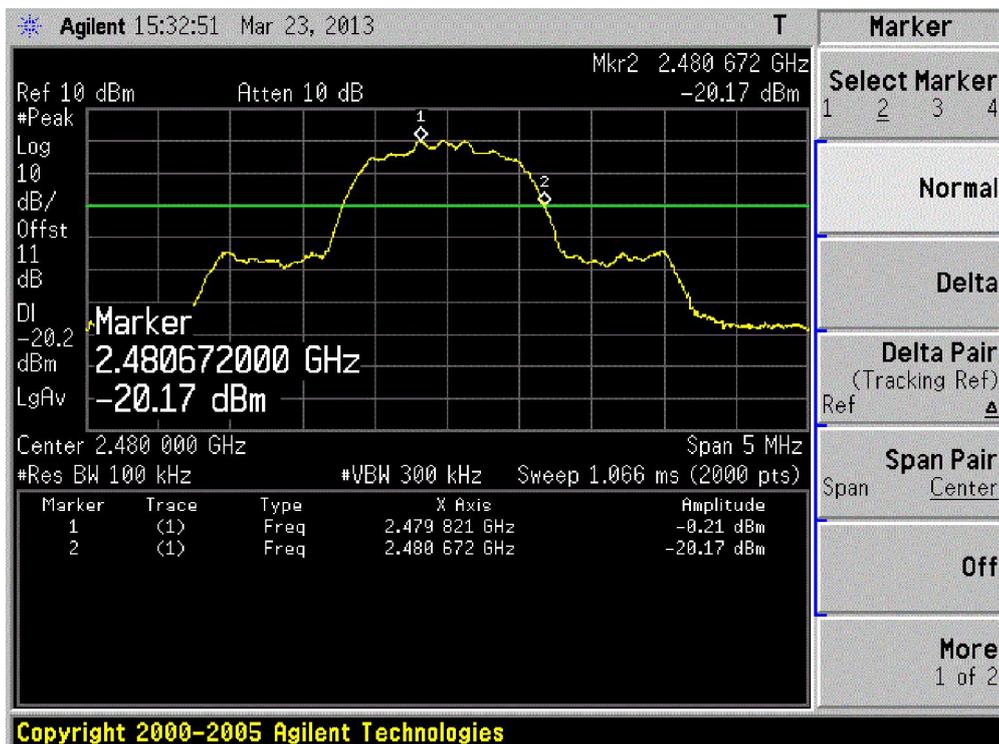


Product	: WCDMA Digital Mobile Phone
Test Item	: Band-edge Compliance of RF Conducted Emissions
Test Mode	: Mode 3: Transmitter-3Mbps(8DPSK_DH5)

Channel 00 (2402MHz)


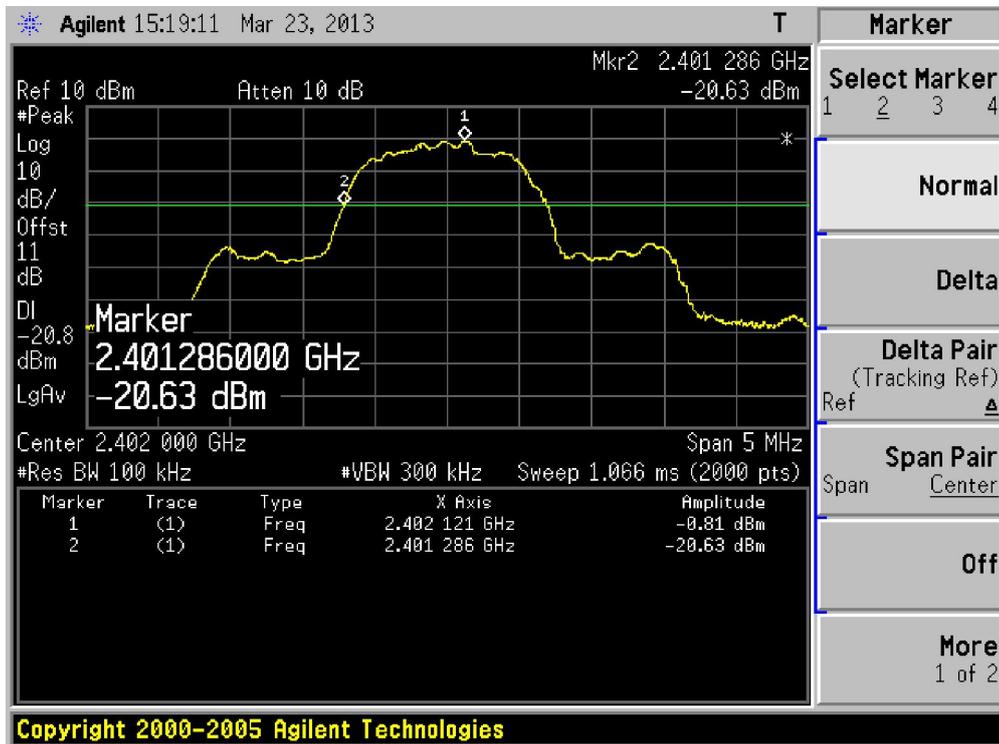


Channel 78 (2480MHz)

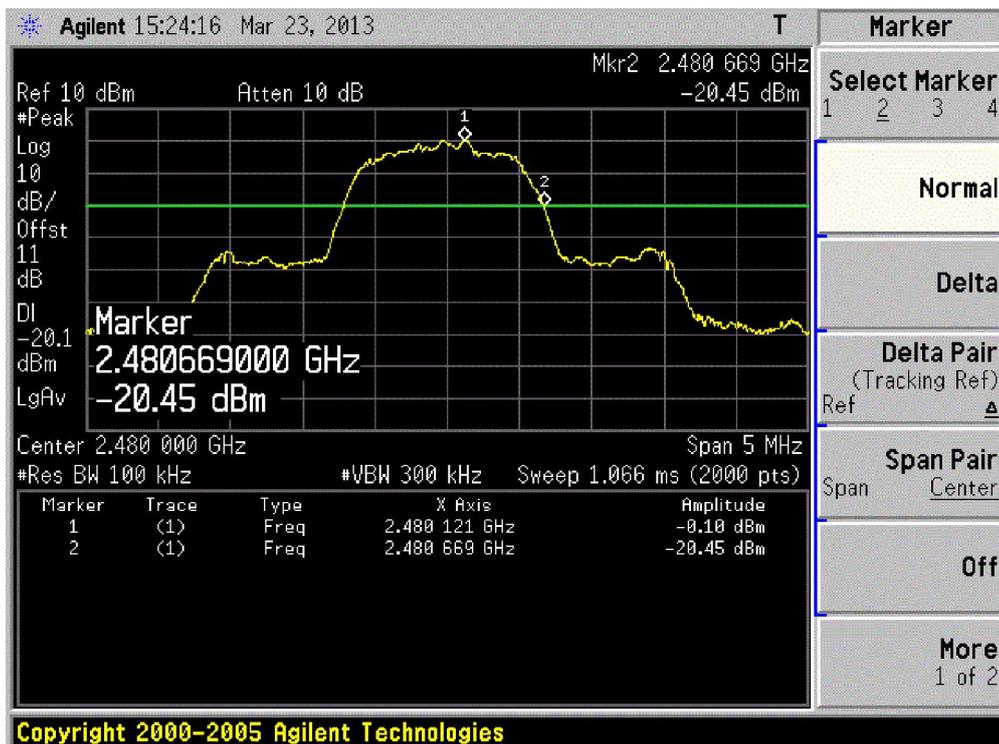

Product	: WCDMA Digital Mobile Phone
Test Item	: Band-edge Compliance of RF Conducted Emissions
Test Mode	: Mode 1: Transmitter-1Mbps(GFSK_DH5)

Hopping Mode

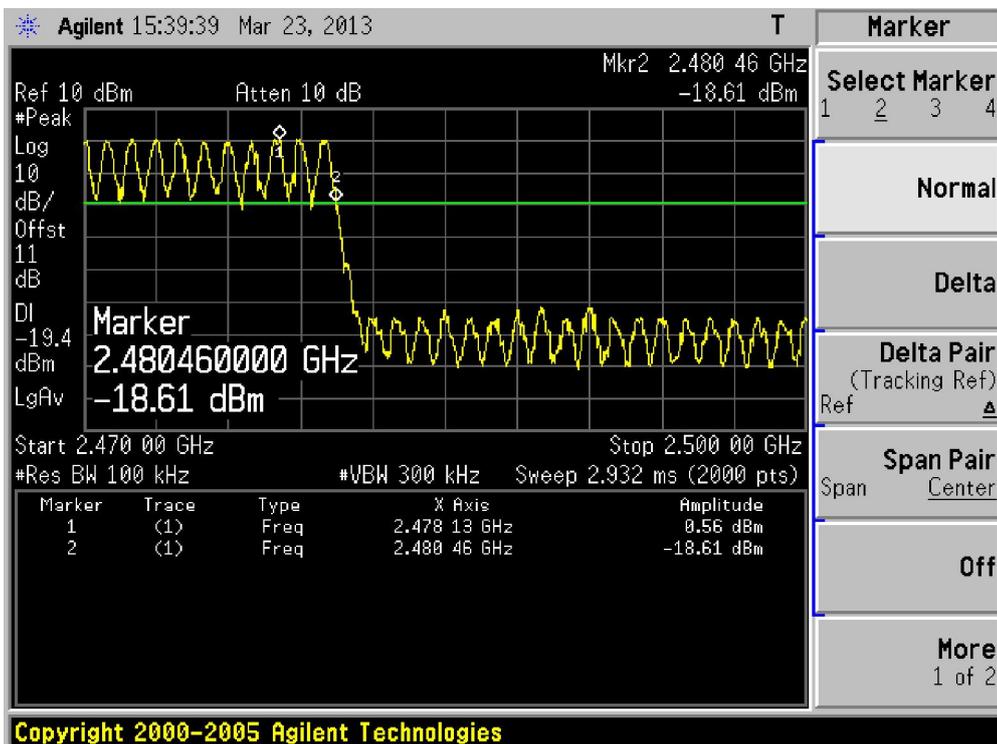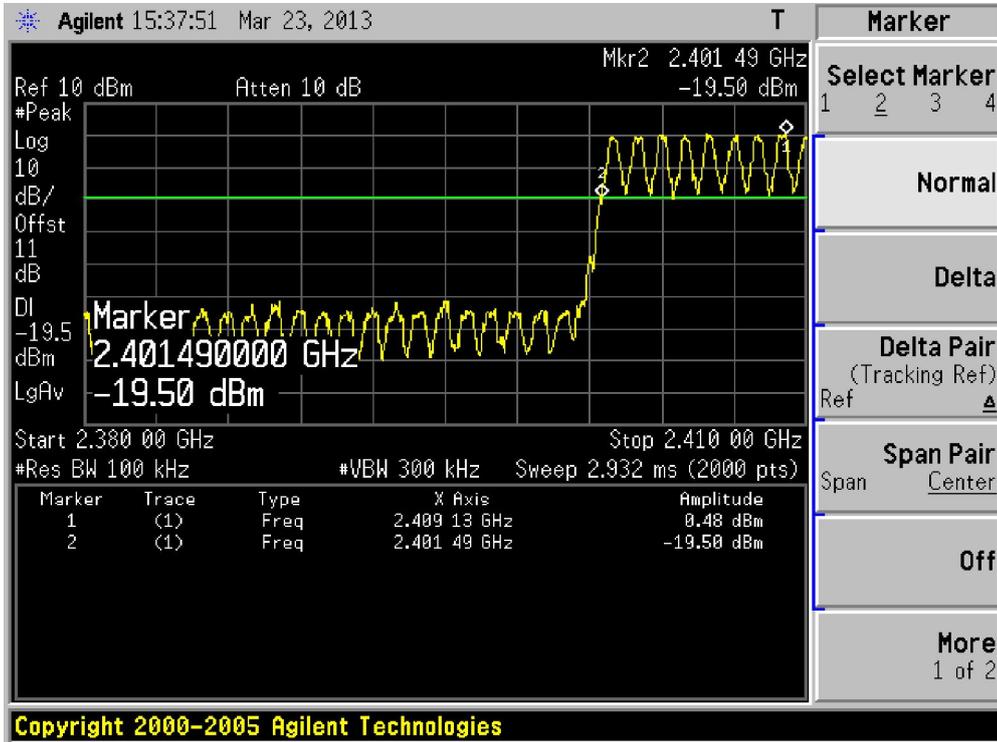

11. Spurious RF Conducted Emissions


11.1. Test Equipment

Spurious RF Conducted Emissions / TR-8

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2014.01.21
Temperature/Humidity Meter	Zhicheng	ZC1-2	TR8-TH	2013.05.07

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

11.2. Test Setup

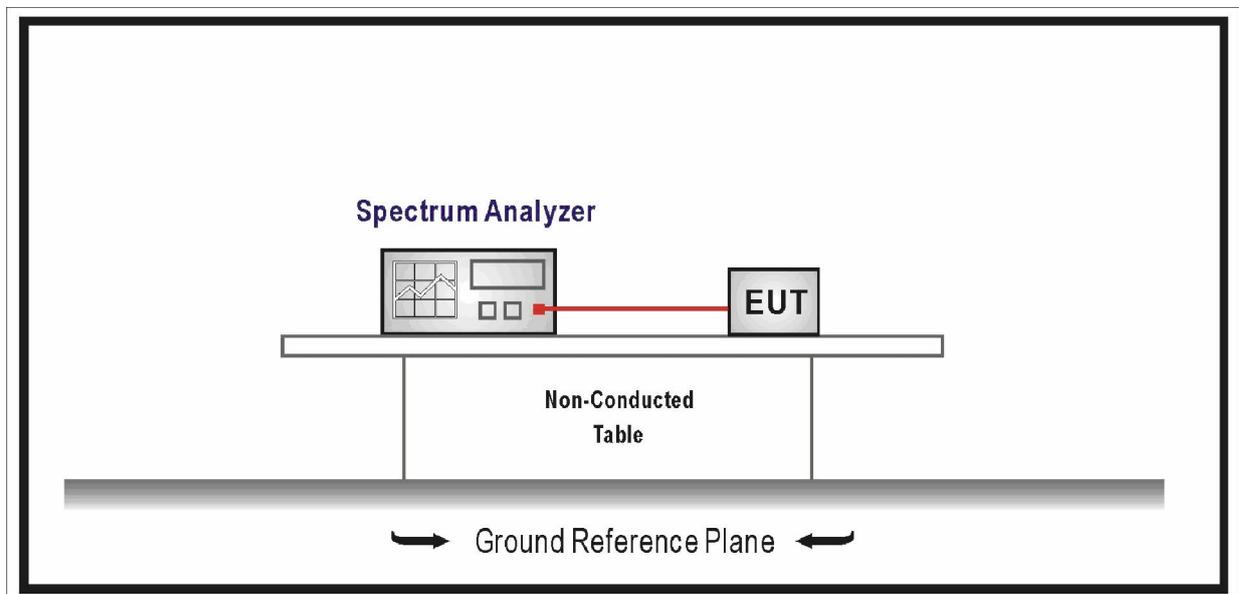

11.3. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in

Section 15.209(a) of FCC part 15 is not required.

11.4. Test Procedure

According to ANSI C63.10: 2009.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \cong RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.


11.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB


11.6. Test Result

Product	:	WCDMA Digital Mobile Phone
Test Item	:	Spurious RF Conducted Emissions
Test Mode	:	Mode 1: Transmitter-1Mbps(GFSK_DH5)


Channel 00 (2402MHz)

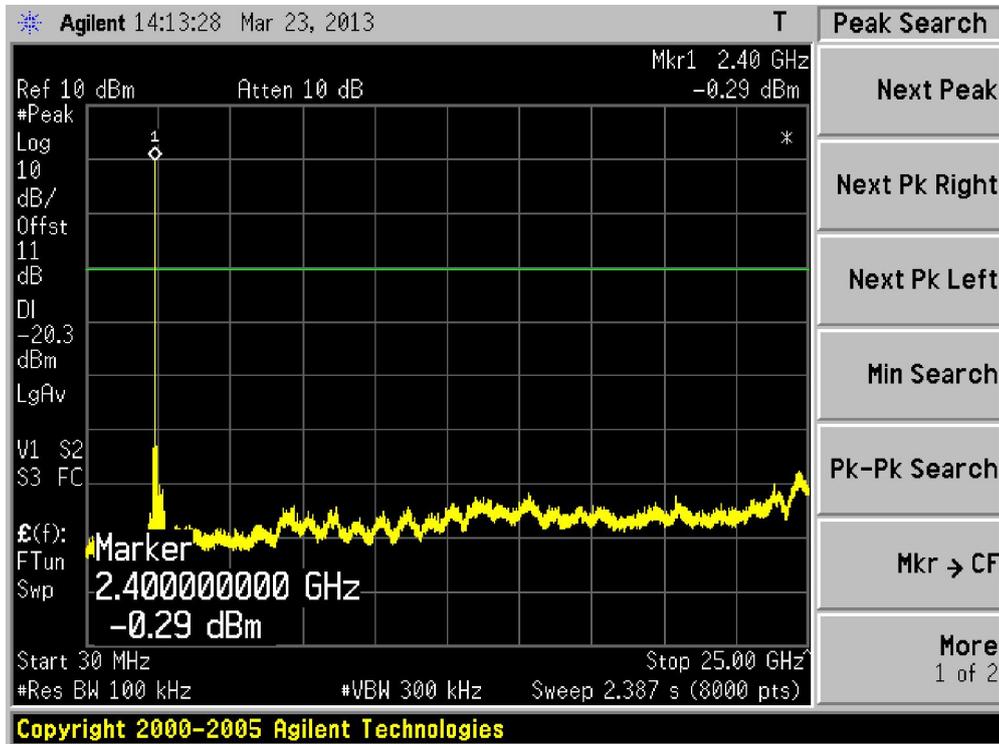

Channel 39 (2441MHz)

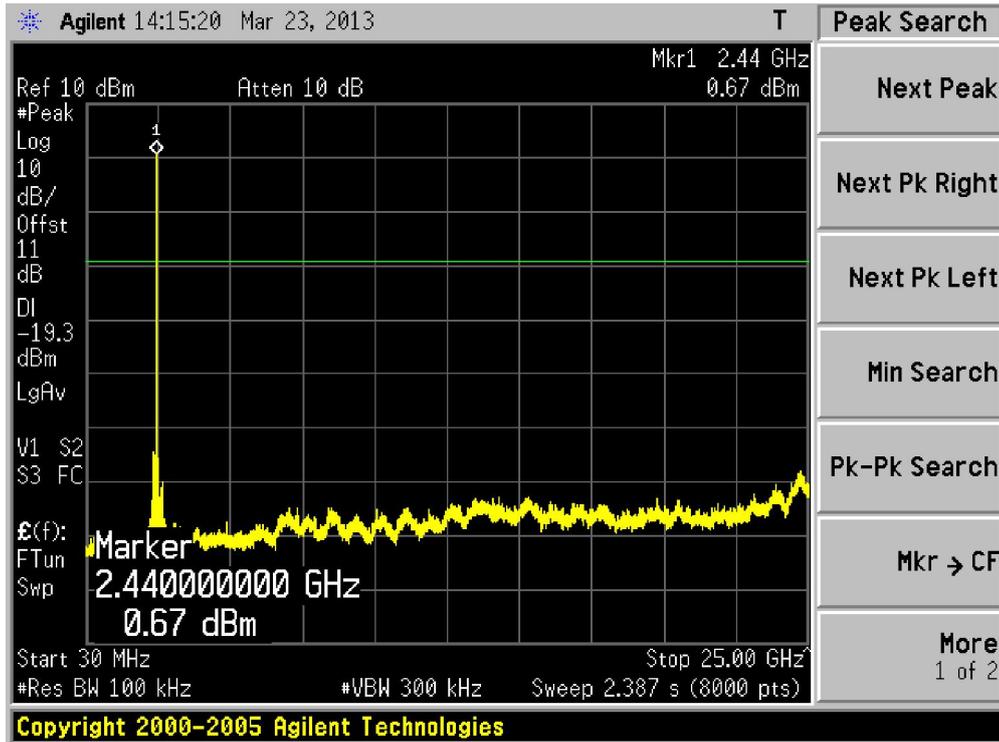


Channel 78 (2480MHz)

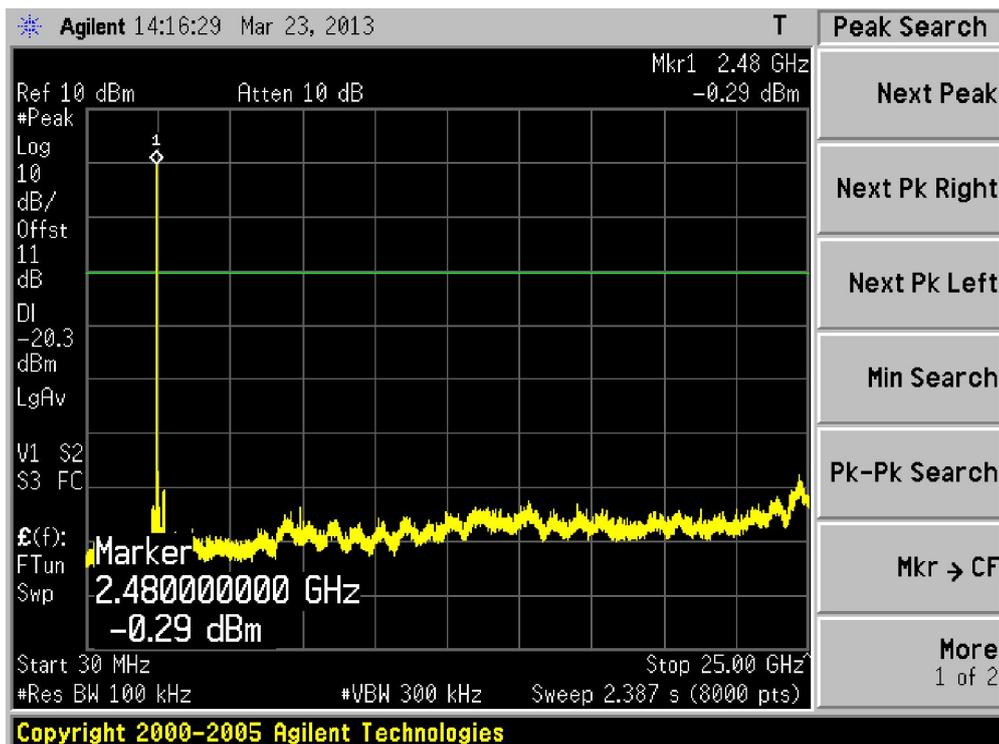


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Spurious RF Conducted Emissions
Test Mode	:	Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)


Channel 00 (2402MHz)

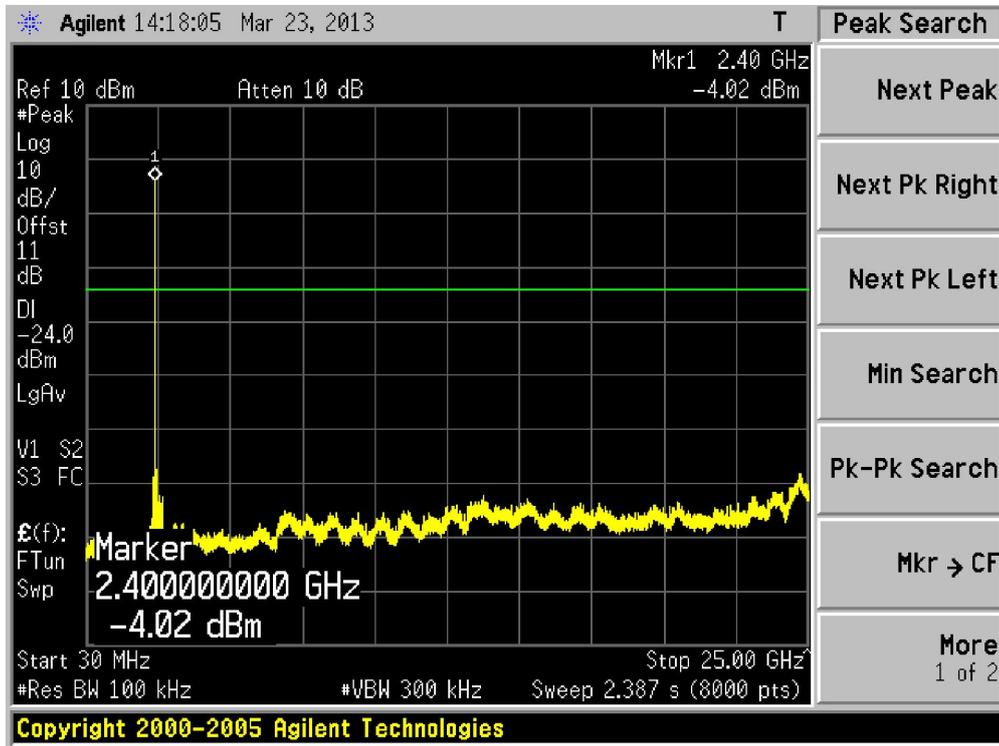

Channel 39 (2441MHz)

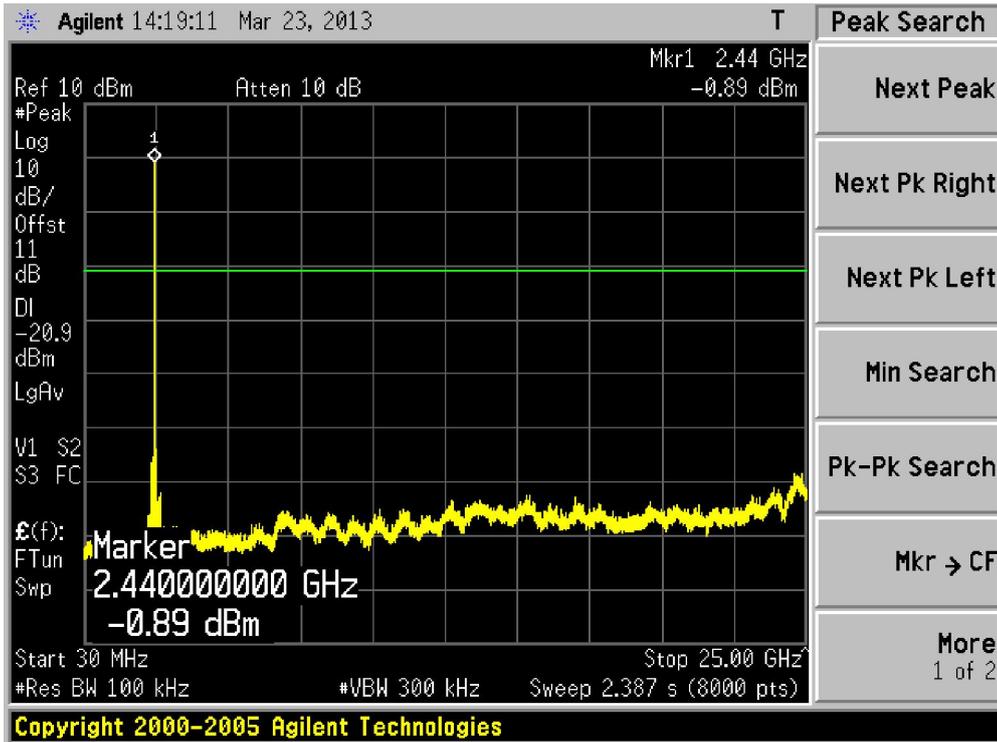


Channel 78 (2480MHz)

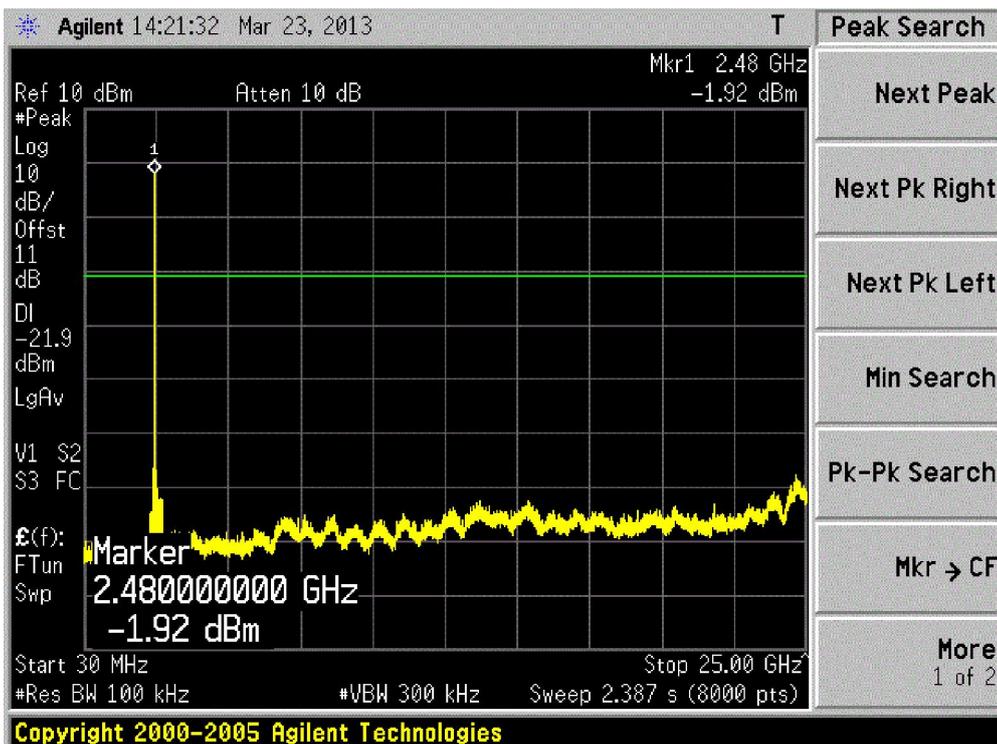


Product	:	WCDMA Digital Mobile Phone
Test Item	:	Spurious RF Conducted Emissions
Test Mode	:	Mode 3: Transmitter-3Mbps(8DPSK_DH5)


Channel 00 (2402MHz)

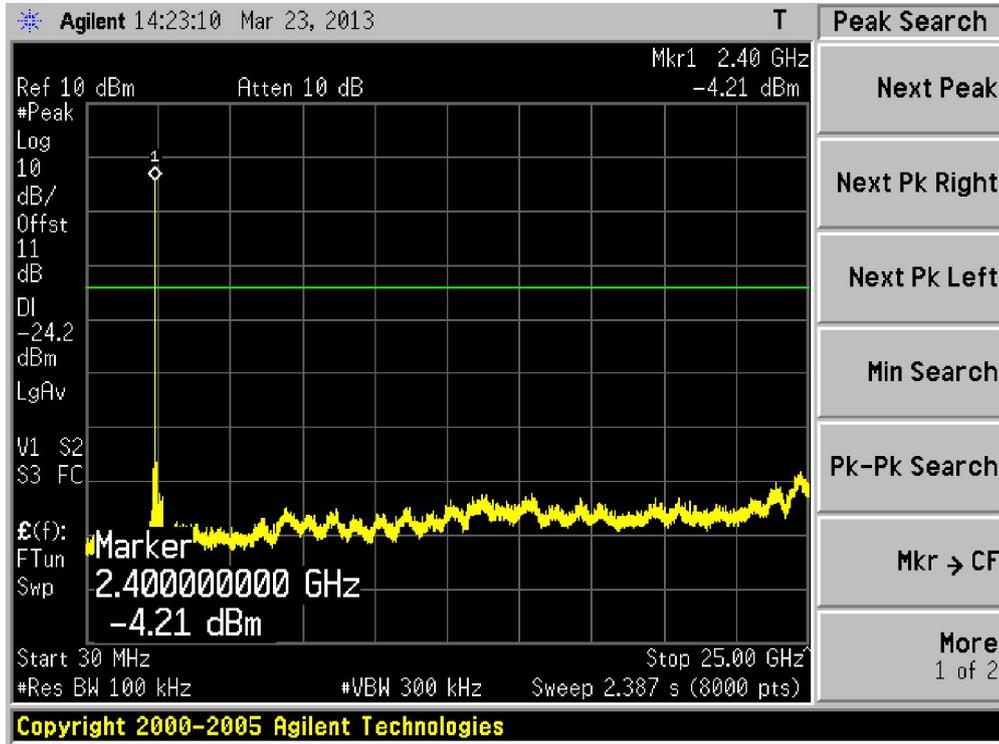

Channel 39 (2441MHz)

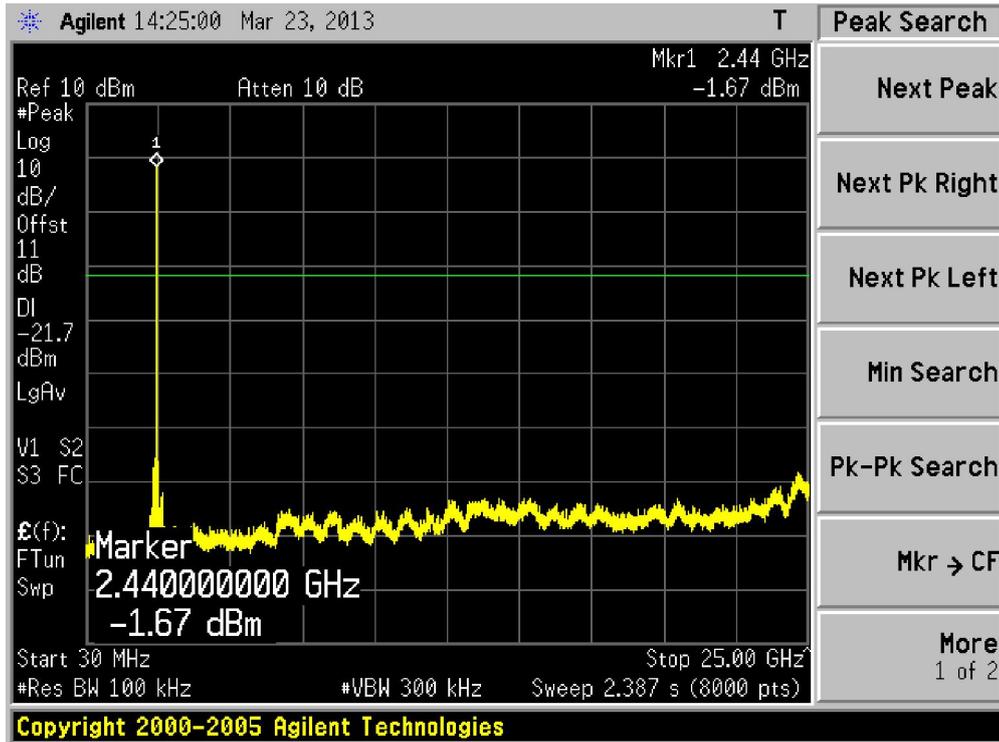

Channel 78 (2480MHz)

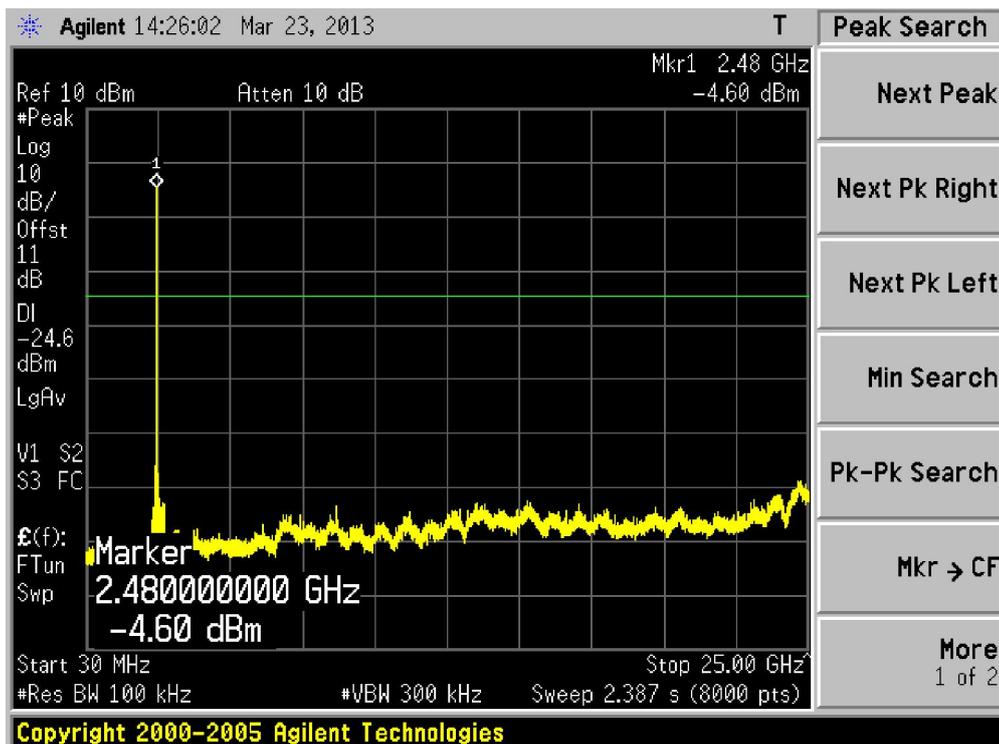


12. Radiated Emission Band Edge

12.1. Test Equipment

Radiated Emission Band Edge / AC-5

Instrument	Manufacturer	Type No.	Serial No.	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2014.03.30
EMI Test Receiver	R&S	ESCI	100573	2014.03.30
Preamplifier	Miteq	NSP1800-25	1364185	2013.05.04
Preamplifier	QuieTek	AP-040G	CHM-0906001	2013.05.04
Bilog Antenna	Teseq GmbH	CBL6112D	27612	2013.10.15
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	499	2014.06.08
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	2014.03.01
Temperature/Humidity Meter	zhicheng	ZC1-2	AC5-TH	2014.01.11

12.2. Test Setup

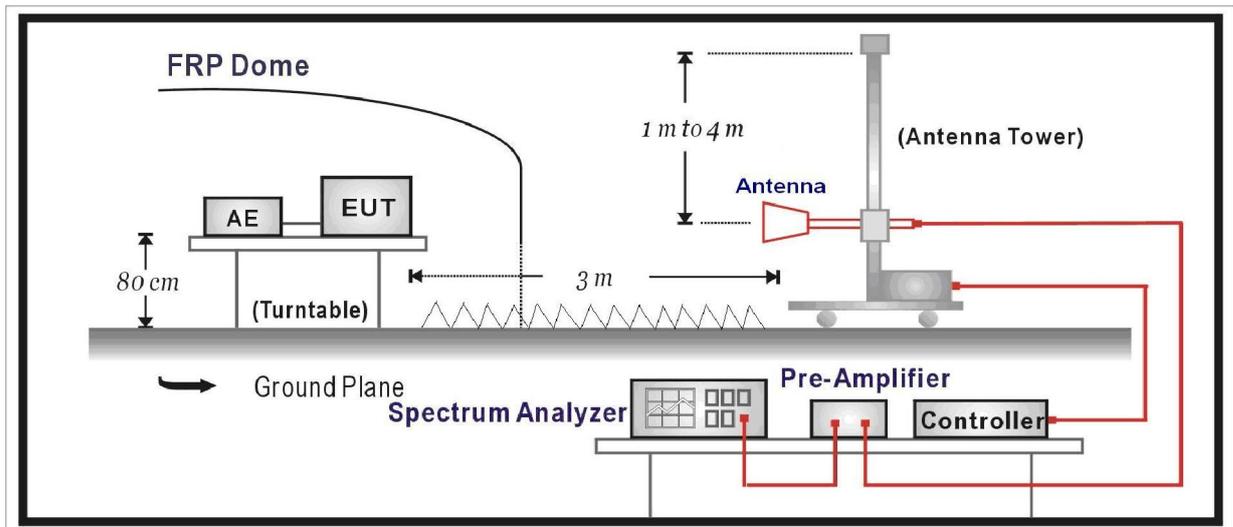

12.3. Limit

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) of FCC part 15.

12.4. Test Procedure

According to ANSI C63.10: 2009.

This test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205 of FCC part 15. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being

corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b) of FCC part 15.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209 of FCC Part 15. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit of FCC part 15.

If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative “marker-delta” method may be employed.

12.5. Uncertainty

The measurement uncertainty above 1G is defined as $\pm 3.9 \text{ dB}$
below 1G is defined as $\pm 3.8 \text{ dB}$


12.6. Test Result

All of the test result shown indicates the worst case, and spectrum analyzer parameters setting as shown below:

Peak detector: RBW = 1MHz, VBW = 3MHz, sweep time = 200ms;


Average detector: RBW = 1MHz, VBW = 10Hz, sweep time = auto.

Engineer: Brgant	
Site: AC5	Time: 2013/03/26 - 20:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D-737(1-18GHz)	Polarity: Horizontal
EUT: WCDMA Digital Mobile Phone	Power: By Battery
Note: Mode 1: Transmit at Channel 2402MHz by DH5	

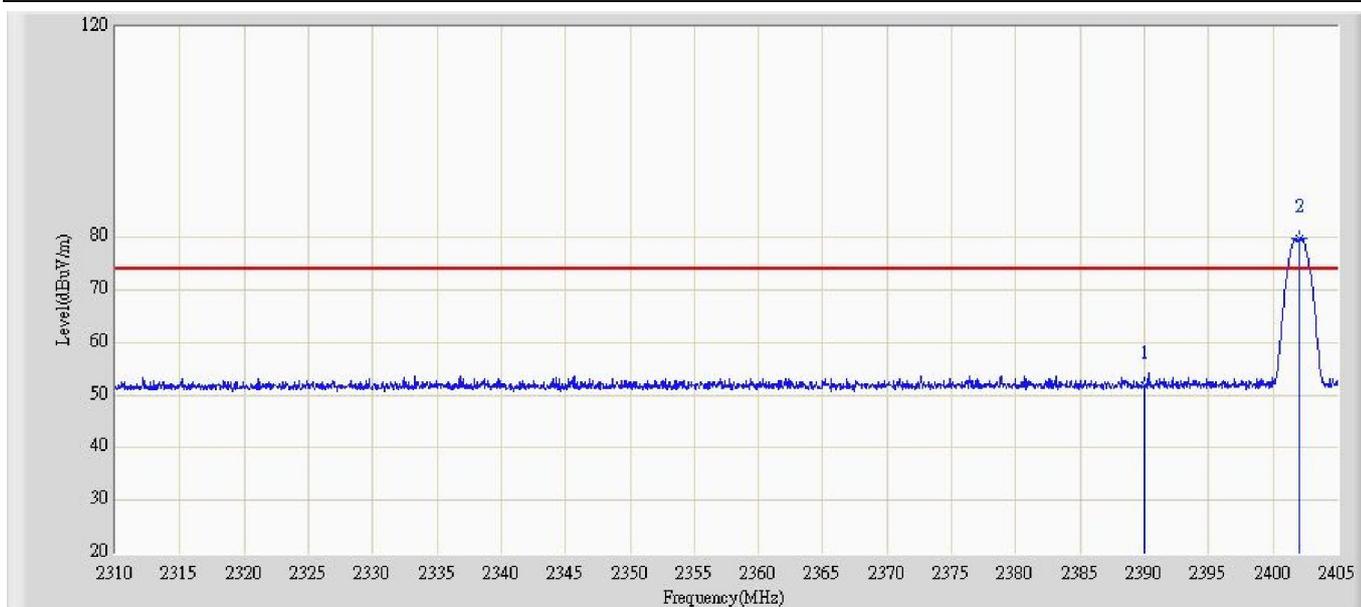


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.882	23.760	-22.118	74.000	28.122	PK
2	*	2402.006	79.846	51.675	N/A	N/A	28.171	PK

Engineer: Brgant	
Site: AC5	Time: 2013/03/26 - 20:32
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D-737(1-18GHz)	Polarity: Horizontal
EUT: WCDMA Digital Mobile Phone	Power: By Battery
Note: Mode 1: Transmit at Channel 2402MHz by DH5	

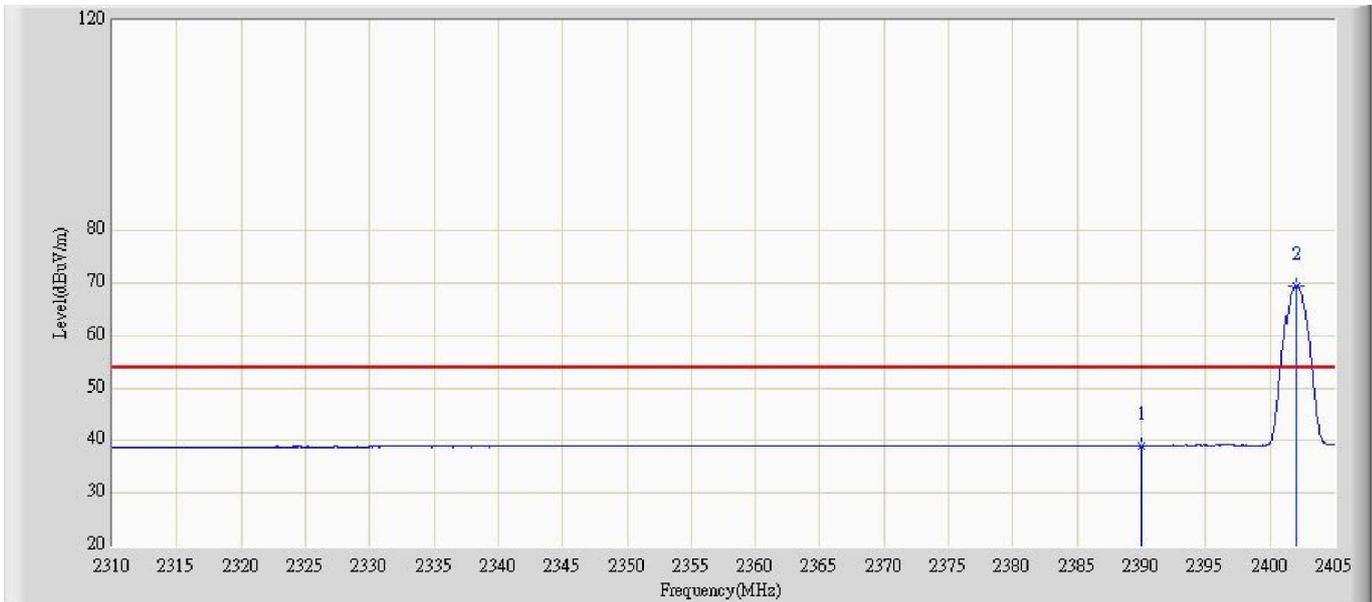

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	39.061	10.939	-14.939	54.000	28.122	AV
2	*	2402.053	69.553	41.382	N/A	N/A	28.171	AV

Engineer: Brgant	
Site: AC5	Time: 2013/03/26 - 20:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA9120D-737(1-18GHz)	Polarity: Vertical
EUT: WCDMA Digital Mobile Phone	Power: By Battery
Note: Mode 1: Transmit at Channel 2402MHz by DH5	

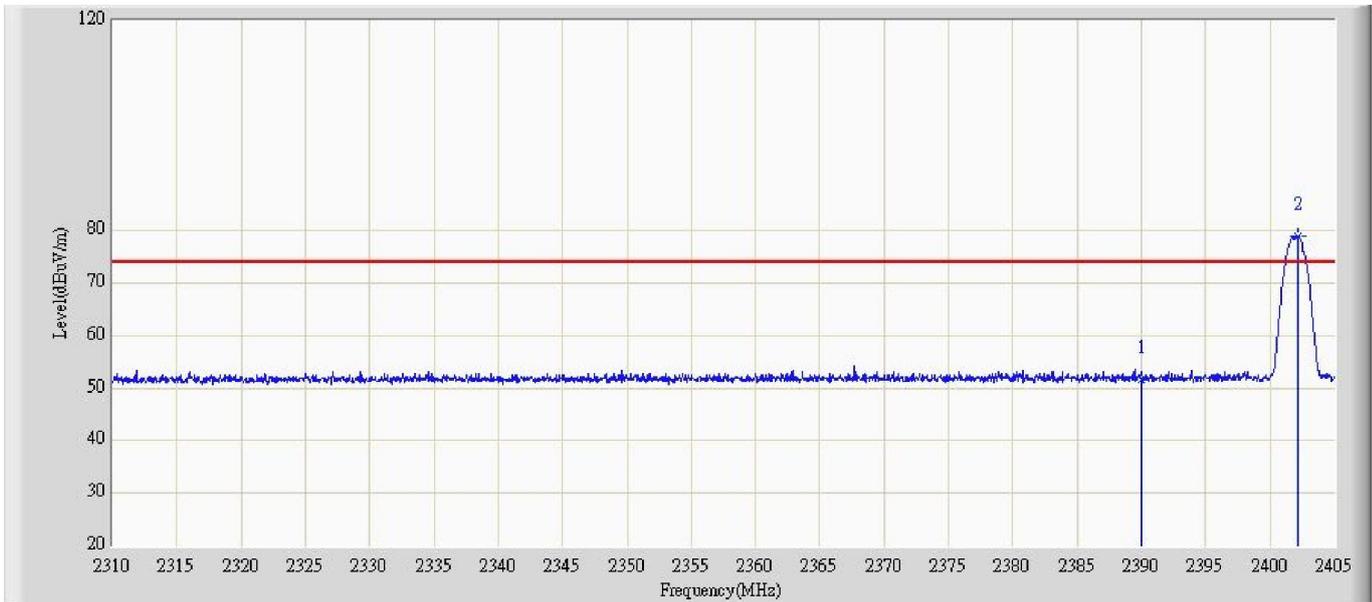

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.493	23.371	-22.507	74.000	28.122	PK
2	*	2402.149	78.898	50.726	N/A	N/A	28.171	PK